

Performance Data Reference Prospect® 8.0 for Ericsson GSM/GPRS/UMTS



Copyright © 2008 Vallent Corporation and/or its subsidiaries. All rights reserved.

Information in these materials is furnished for informational use only, is subject to change without notice and does not represent a commitment on the part of Vallent Corporation ("Vallent"). These materials, as well as the software described herein ("Software"), are furnished under license; there is no transfer of title. The Software is subject to the license agreement that accompanies or is included with the Software, which specifies the permitted and prohibited uses of the Software. Any unauthorized duplication or use of Vallent Software, in whole or in part, in print or in any other storage and retrieval system is prohibited.

Furthermore, the purchase of Vallent products shall not be deemed to grant either directly or by implication, estoppel or otherwise, any license under the copyrights, trademarks, patents or patent applications of Vallent as may arise by operation of law in the sale of a product.

It is possible that these materials may contain references to, or information about, Vallent products or services that are not announced or available in your country. Such references or information must not be construed to mean that Vallent intends to announce or make available such products or services in your country.

These materials are protected by copyright laws and international copyright treaties; no part of these materials may be copied, distributed, downloaded, modified, posted, published, reproduced, reused, re-posted, stored in a retrieval system, transcribed, translated into any language or computer language, transmitted, uploaded or otherwise used in any form or by any means (electronic, mechanical, recording or otherwise) without the prior written permission of Vallent.

While reasonable efforts have been made to ensure the accuracy of these materials, Vallent assumes no responsibility or liability for any errors, inaccuracies or omissions that may appear in these materials or from the use of these materials. Use these materials at your own risk.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, VALLENT AND ITS SUPPLIERS DISCLAIM ANY AND ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT, AND THOSE ARISING OUT OF USAGE OF TRADE OR COURSE OF DEALING, CONCERNING THESE MATERIALS. THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL VALLENT OR ITS SUPPLIERS (OR THEIR RESPECTIVE AGENTS, DIRECTORS, EMPLOYEES OR REPRESENTATIVES) BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, CONSEQUENTIAL, INCIDENTAL, DIRECT, INDIRECT, SPECIAL, ECONOMIC, PUNITIVE OR SIMILAR DAMAGES, OR DAMAGES FOR LOSS OF BUSINESS PROFITS, LOSS OF GOODWILL, BUSINESS INTERRUPTION, COMPUTER FAILURE OR MALFUNCTION, LOSS OF BUSINESS INFORMATION OR ANY AND ALL OTHER COMMERCIAL OR PECUNIARY DAMAGES OR LOSSES) ARISING OUT OF THE PURCHASE OR USE OF THESE MATERIALS, HOWEVER CAUSED AND ON ANY LEGAL THEORY OF LIABILITY (WHETHER IN TORT, CONTRACT OR OTHERWISE), EVEN IF VALLENT

HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, OR FOR ANY CLAIM BY ANY OTHER PARTY. Because some jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply to you.

THESE MATERIALS ARE INTENDED FOR STANDARD COMMERCIAL USES; THEY MUST NOT BE USED IN ANY HAZARDOUS ENVIRONMENTS REQUIRING FAIL SAFE PERFORMANCE, SUCH AS IN THE OPERATION OF NUCLEAR FACILITIES, AIRCRAFT NAVIGATION OR COMMUNICATION SYSTEMS, AIR TRAFFIC CONTROL, DIRECT LIFE SUPPORT MACHINES, OR WEAPONS SYSTEMS, IN WHICH THE FAILURE OF THESE MATERIALS COULD RESULT IN DEATH, PERSONAL INJURY, OR SEVERE PHYSICAL OR ENVIRONMENTAL DAMAGE. YOU HEREBY AGREE THAT THE USE OF THESE MATERIALS FOR ANY SUCH APPLICATION IS AT YOUR SOLE RISK. YOU AGREE TO INDEMNIFY AND HOLD VALLENT HARMLESS FROM ANY CLAIMS FOR LOSS, COST, DAMAGE, EXPENSE OR LIABILITY THAT MAY ARISE OUT OF OR IN CONNECTION WITH THE USE OF THESE MATERIALS IN SUCH APPLICATIONS.

Unless otherwise noted, all names of companies, products, street addresses, data, characters and persons contained herein are part of a completely fictitious scenario or scenarios, are designed solely to document the use of a Vallent product, and are in no way intended to represent any real individual, company, product or event.

Vallent, the Vallent logo, Vallent Control, Vallent Design, Vallent Pilot, Virtuo, Prospect, Metrica Performance Manager, ServiceAssure, NetworkAssure and BusinessAssure are either registered trademarks or trademarks of Vallent and/or its subsidiaries in the United States and/or other countries.

All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Vallent's License Manager is a licensed product of Elan Computer Group, Inc./Rainbow Technologies.

US Government Restricted Rights: These materials are provided with RESTRICTED RIGHTS. Use, duplication or disclosure by the Government is subject to restriction as set forth in subparagraph (c)(1)(ii) of the rights in Technical Data and Computer Software clause at DFAR 252.227-7013, or as set forth in the particular department or agency regulations or rules which provide Vallent protection equivalent to or greater than the above-cited clause. The contractor/manufacturer is Vallent Corporation, 13431 NE 20th Street, Bellevue, WA 98005, USA.

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

1	About This Documentation	321
	Audience	321
	Required Skills and Knowledge	321
	Document Conventions	322
	User Publications	323
	Viewing the Desktop Client Help Publications	323
	Viewing the Publications in PDF	324
	Training and Technical Support	324
2	Introduction	325
3	MSC Traffic Entities	327
4	MSC Traffic Fields	331
	AppContext_MSC Primitive Calculations	331
	GRAPHmultiLineSeparator	331
	NUMDAYS	331
	NUMHOURS	331
	AppContext_MSC Peg Counts	331
	NFB3TO1TOT	331
	NFB3TO2TOT	332
	NFBACTOT	332
	BSC Primitive Calculations	332
	Alloc_Fail	332
	CP_LOAD%	332
	GRAPHmultiLineSeparator	332
	INTERVALS	332
	INTERVALS_MSC	332
	NUMDAYS	333
	NUMHOURS	333
	PROC_LOAD%	333
	TCH_Traffic	333
	TCH_Traffic_BH	333
	VENDORTECH	333
	BSC Peg Counts	333
	ABLOL	334
	ABORT	334
	ACCLoad	334
	ALLPDCHPCUATT	334
	ALLPDCHPCUFail	335
	AQMDelivData	335
	AQMRECDATA	335
	BLOL	336
	BLOL_RP	336
	BLOLCLM_BSC	336
	BLOLSPM_BSC	337
	BLOLSPMA_BSC	337
	BLOLSPMB_BSC	337
	BLOLTSM_BSC	338
	BLOLTSMa_BSC	338
	BLOLTSMb_BSC	338
	BSCCUMMS	339

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

BSCMAXMS	339
BSS_RELEASE	339
BUFFRS	339
C7ROUTECONT	340
CONNSECT	340
COREQSEG	340
CREFREC	340
CREFSENT	341
CRREC	341
CRSENT	341
CSEGRESF	342
DELRELDLTBF	342
DELRELTONRM	342
DISCDL	343
DISCUL	343
DMSU_BSC	343
DSIF_BSC	344
ECTMCTMSD	344
ECTMMSNOT	344
ECTMMSSUP	345
ECTMNCTMSD	345
ERRREC	345
ERRSENT	346
ESUDLTBF	346
ESUTONRM	346
EXULNRM	347
EXULTIP	347
FAILMOVECELL	347
FRV1UNATT	348
FRV2UNATT	348
FRV3UNATT	348
FTDTCAP	349
G2GPH0040LOAD	349
G2GPH4160LOAD	349
G2GPH6180LOAD	350
G2GPH8190LOAD	350
G2GPH9100LOAD	350
G2TRH0040LOAD	350
G2TRH4160LOAD	351
G2TRH6180LOAD	351
G2TRH8190LOAD	351
G2TRH9100LOAD	352
GSL0040	352
GSL4160	352
GSL6180	353
GSL8190	353
GSL9100	353
GSLMAX	354
GSLSCAN	354
GSLSSCAN	354
GSLUTIL	355

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GSM1800CUMMS	355
GSM1800MAXMS	355
GSM400CUMMS	356
GSM400MAXMS	356
GSM800CUMMS	356
GSM800MAXMS	356
GSM900CUMMS	357
GSM900MAXMS	357
HLSCGREL	357
HRV1UNATT	358
HRV2UNATT	358
HRV3UNATT	358
IMSU_BSC	359
ISIF_BSC	359
LCCELLMOV	359
LCCELLMOVREJ	360
LCHIRPPLOAD	360
LCMSSUPRFC	360
LCPARREJ	361
LCRELBUSYHI3	361
LCRELIDLEHI3	361
LINKS	361
LNKSETS	362
MSGHAND	362
MSGPOL	362
MSGPOLREJ	363
MSGRCL0	363
MSGRCL1	363
MSGRQGT	364
MSGSCL0	364
MSGSCL1	364
MSINVDPC_BSC	365
MSINVSIO_BSC	365
MTPREST	365
NACCBLOT_BSC	365
NACCPCO	366
NBLOCLMAACC_BSC	366
NBLOL	366
NBLOSPMAACC_BSC	367
NBLOSPMAACC_BSC	367
NBLOSPMBACC_BSC	367
NBLOTSMAACC_BSC	368
NBLOTSMAACC_BSC	368
NBLOTSMBACC_BSC	368
NBSCOINRCVSUCC	369
NBSCOINSNTTOT	369
NBSDFRFRSUCC	369
NBSDFRHRSUCC	370
NBSDFRSUCC	370
NBSDFRTOT	370
NBSDHRFRSUCC	371

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NBSDHRHRSUCC	371
NBSDHRSUCC	371
NBSDHRTOT	372
NBSDTOT	372
NBSFRFRSUCC	372
NBSFRTOT	373
NBSFRV1ANPTOT	373
NBSFRV1ATOT	373
NBSFRV1PTOT	374
NBSFRV2ANPTOT	374
NBSFRV2ATOT	374
NBSFRV2PTOT	375
NBSFRV3ANPTOT	375
NBSFRV3ATOT	375
NBSFRV3PTOT	376
NBSHRHRSUCC	376
NBSHRTOT	376
NBSHRV1ANPTOT	377
NBSHRV1ATOT	377
NBSHRV1PTOT	377
NBSHRV2ANPTOT	378
NBSHRV2ATOT	378
NBSHRV2PTOT	378
NBSHRV3ANPTOT	379
NBSHRV3ATOT	379
NBSHRV3PTOT	379
NBSLOCINCMDTOT	380
NBSLOCINREPSUCC	380
NBSMSLSUCC	380
NBSMSLTOT	381
NBSOVLSTOT	381
NBSPCHACMTOT	381
NBSPCHAFMTOT	382
NBSPCHAFSWTOT	382
NBSPEHNDTOT	382
NBSRLOCRESSUCC	383
NBSLOCREQTOT	383
NBSTIHBSUCC	383
NBSTIUGHBSUCC	384
NBSTOGUHBSUCC	384
NBSTOHBSUCC	384
NBSTRGUHRTOT	384
NBSTRHPTOT	385
NBSTRHRTOT	385
NBSTRRMTOT	385
NBSTSHRTOT	386
NBSTSMITTOT	386
NBSTSUGHRTOT	386
NC2CONF	387
NC2ORDER	387
NC2PCO	387

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NCAPREJCNT	388
NCAPREQCNT	388
NCLM_BSC	388
NCPABLOT_BSC	389
NCPMBLOT_BSC	389
NEM	389
NEMG	390
NEMRP	390
NFORLAPT_BSC	390
NFORLAPZ_BSC	390
NFORLMAN_BSC	391
NFTDEMC	391
NFTDIEX	391
NFTDMHI	392
NFTDMLO	392
NFTDMT0	392
NFTDMT1	393
NFTDMT10	393
NFTDMT12	393
NFTDMT13	394
NFTDMT14	394
NFTDMT15	394
NFTDMT2	395
NFTDMT3	395
NFTDMT4	395
NFTDMT5	396
NFTDMT6	396
NFTDMT7	396
NFTDMT8	397
NFTDMT9	397
NFTDNPRIO_BSC	397
NFTDORG	398
NFTDPRIO_BSC	398
NFTDTCAP	398
NLRGA_BSC	399
NLRGM_BSC	399
NMAUABLOT_BSC	399
NMAUF_BSC	400
NMAUMBLOT_BSC	400
NNOREC_BSC	400
NOFFIEX	401
NOFFMHI	401
NOFFMLO	401
NOFFMT0	402
NOFFMT1	402
NOFFMT10	402
NOFFMT12	403
NOFFMT13	403
NOFFMT14	403
NOFFMT15	404
NOFFMT2	404

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NOFFMT3	404
NOFFMT4	405
NOFFMT5	405
NOFFMT6	405
NOFFMT7	406
NOFFMT8	406
NOFFMT9	406
NOFFNPRIO_BSC	407
NOFFORG	407
NOFFPRIO_BSC	407
NOFFTCAP	408
NPBITF_BSC	408
NPCPF_BSC	408
NPERMF	409
NPERMF_EMG	409
NREJEMC	409
NREJIEX	409
NREJNPRIO	410
NREJORG	410
NREJPCH	410
NREJPRIO	411
NRELA_BSC	411
NRELM_BSC	411
NRP	412
NSCAN	412
NSCAN_GRP SWITCH_BSC	412
NSMLA_BSC	413
NSMLM_BSC	413
NSPM_BSC	413
NT10SRST	413
NT11TFRS	414
NT12UNAK	414
NT13FUNH	414
NT14INAK	415
NT15RSCT	415
NT16RSCS	415
NT19FLKR	416
NT1TDCHO	416
NT20RLIH	416
NT21RRIH	417
NT2CHOAK	417
NT3TDCHB	417
NT4CHBK1	417
NT5CHBK2	418
NT6TDCRR	418
NT8TRPRH	418
NTBITF_BSC	419
NTCPF_BSC	419
NTEMPF	419
NTSM_BSC	420
OCTRETRN_BSC	420

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

OMMSU_BSC	420
OMSIF_BSC	421
OUMSU_BSC	421
OUSIF_BSC	421
P95FPHGT_BSC	421
P95FPHNT_BSC	422
PAGCSBSC	422
PAGCSCONG	422
PAGPSBSC	423
PAIRABLOL	423
PAIRABLOL1	423
PAIRMBLOL	424
PAIRMBLOL1	424
PBPGW0040LOAD	424
PBPGW4160LOAD	425
PBPGW6180LOAD	425
PBPGW8190LOAD	425
PBPGW9100LOAD	426
PENDCONTSTRTBFB	426
PENDSTRTBFB	426
PERFLOCABORT	427
PERFLOCREQ	427
PERFLOCRESP	427
PERLEN	428
PERLEN_MSC	428
PGWHLRPP	428
RCBFSZMS	428
RESET	428
RFNETCONG	429
RFNETFAIL	429
RFSPADDR	429
RFSSNFAIL	430
RFSUADDR	430
RFUNEQUIP	430
RFUNQUAL	430
RPP0040	431
RPP4160	431
RPP6180	431
RPP8190	432
RPP9100	432
SAMPPHGT_BSC	432
SAMPPHNT_BSC	433
SHLSCGREL	433
SIZEDS_BSC	433
SIZEPS_BSC	434
SIZERS_BSC	434
STARTCONTSTRTBFB	434
STARTSTRTBFB	435
SVHLSCGREL	435
SYERROR	435
TIMEPHGT_BSC	435

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TIMEPHNT_BSC	436
TMASSALL	436
TMCASSALL	436
TMCHRECACC	437
TMCHREQACC	437
TMCHSCAN	437
TMCNCBATT	438
TMCNCBSUCC	438
TMCNCMATT	438
TMCNCMSUCC	439
TMHOATT	439
TMHOSUCC	439
TMMSU_BSC	439
TMSIF_BSC	440
TOTCONGPAG	440
TOTPAG	440
TOTSCBUF1	441
TOTSCBUF2	441
TOTSCBUF3	441
TOTSCBUF4	442
TRASSYNCF	442
TREQRES	442
TSMODECS	443
TSMODEIDLE	443
TSMODEPS	443
TUMSU_BSC	443
TUSIF_BSC	444
TXBFSZOC	444
UDTREC	444
UDTSENT	445
UDTSREC	445
UDTSSENT	445
USGSCNVC	446
VHLSCGREL	446
XUDTREC	446
XUDTSENT	447
XUDTSREC	447
XUDTSSENT	447
Z22	447
Z23	448
Z24	448
Z25	448
Z26	449
Z27	449
Z28	449
Z29	450
Z30	450
Z31	450
Z32	451
BSC_NI Primitive Calculations	451
GRAPHmultiLineSeparator	451

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	451
NUMHOURS	451
BSC_SS7Dest Primitive Calculations	451
LocalName	451
BSC_SS7HSLPrmGrp Primitive Calculations	452
GRAPHmultiLineSeparator	452
LocalName	452
NUMDAYS	452
NUMHOURS	452
VENDORTECH	452
BSC_SS7HSLPrmGrp Peg Counts	452
AERMM	453
AERMN	453
AERMTIE	453
AERMTIN	453
ALPHA	454
CNGABTH1	454
CNGABTH2	454
CNGABTH3	455
CNGDITH1	455
CNGDITH2	455
CNGDITH3	456
CNGONTH1	456
CNGONTH2	456
CNGONTH3	457
ERRCORR	457
HLR_RELEASE	457
LT1ALNRD	458
LT1UNACK	458
LT2NOALN	458
LT3ALIND	458
LT4EMGPV	459
LT4NMLPV	459
LT5DSIB	459
LT6RMCNG	460
LT7XDLAK	460
LTBLCKSZ	460
LTFORPRV	461
LTKPALIV	461
LTMAXPDU	461
LTMXIDLE	462
LTNOCRED	462
LTPRV PDU	462
LTPULLRT	463
LTSCCFAL	463
LTSCCOPR	463
LTSETALG	463
LTSTATLS	464
LTtauERR	464
MONEREVT	464

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MONINTER	465
NMXSDPDU	465
NMXSTPDU	465
NMXUNACK	466
NT17REAL	466
PCRN2	466
PDUSENTP	467
PERLEN	467
SCCOPPDU	467
SUERMD	467
SUERMT	468
TAS	468
THRSRUNQ	468
TTS	469
BSC_SS7Link Primitive Calculations	469
C7_SLTL_RX	469
C7_SLTL_TX	469
GRAPHmultiLineSeparator	469
INTERVALS	469
NumberMSUsReceived	470
NumberMSUsTransmitted	470
NumberSIFAndSIOOctetsReceived	470
NumberSIFAndSIOOctetsTransmitted	470
NUMDAYS	470
NUMHOURS	470
PercentageLinkAvailability	470
PercentageLocalBusy	471
VENDORTECH	471
BSC_SS7Link Peg Counts	471
ACHGOVRS_BSC_C7Link	471
ACHGOVRS_BSC_HSC7Link	471
ALGNFLRS_BSC_HSC7Link	472
ASLDUR	472
BSS_RELEASE	472
CDISCONX_BSC_HSC7Link	472
CGSTEVL_BSC_HSC7Link	473
CGSTLEVL	473
CGSTLEVL_BSC_C7Link	473
CGSTSTAT_BSC_C7Link	473
CGSTSTAT_BSC_HSC7Link	474
CHOVERS	474
CLUSTERCODE_BSC_SS7SLMT1	474
CLUSTERCODE_BSC_SS7SLMT2	475
CLUSTERCODE_BSC_SS7SLTRAFF	475
CNRECONX_BSC_HSC7Link	475
CNSUMERS_BSC_HSC7Link	476
CONCNT1	476
CONCNT2	476
CONCNT3	477
CONDUR1	477
CONDUR2	477

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CONDUR3	477
CONSTOP1	478
CONSTOP2	478
CONSTOP3	478
DATALOSTFLAG_SPDL	479
DCLRFAIL_BSC_C7Link	479
DCLRFAIL_BSC_HSC7Link	479
DDCFLABN_BSC_C7Link	480
DDCFLHWP_BSC_C7Link	480
DDCFLHWP_BSC_HSC7Link	480
DDCFLXDA_BSC_C7Link	481
DDCFLXDA_BSC_HSC7Link	481
DDCFLXDC_BSC_C7Link	481
DDCFLXDC_BSC_HSC7Link	482
DDCFLXER_BSC_C7Link	482
DDCFLXER_BSC_HSC7Link	482
DISMSU1	483
DISMSU2	483
DISMSU3	483
DRBSYDCL_BSC_C7Link	483
DRBSYDCL_BSC_HSC7Link	484
DRBSYRCD_BSC_C7Link	484
DRDCLFLR_BSC_C7Link	484
DRDCLFLR_BSC_HSC7Link	485
DRFEPRO_BSC_C7Link	485
DRFEPRO_BSC_HSC7Link	485
DRLCLPRO_BSC_C7Link	486
DRLCLPRO_BSC_HSC7Link	486
DRLKFAIL_BSC_C7Link	486
DRLKINHB_BSC_C7Link	487
DRLKINHB_BSC_HSC7Link	487
DRNOCRED_BSC_HSC7Link	487
ECCNGLV1_BSC_C7Link	487
ECCNGLV1_BSC_HSC7Link	488
ECCNGLV2_BSC_C7Link	488
ECCNGLV2_BSC_HSC7Link	488
ECCNGLV3_BSC_C7Link	489
ECCNGLV3_BSC_HSC7Link	489
ERRSEC_BSC_C7Link	489
ERRSEC_BSC_HSC7Link	490
FARMGINH_BSC_C7Link	490
FARMGINH_BSC_HSC7Link	490
HDRDSCDS_BSC_HSC7Link	491
HECDSCDS_BSC_HSC7Link	491
HSLDISMSU1	491
HSLDISMSU2	491
HSLDISMSU3	492
HSLHDRDSCDS	492
HSLHECDSCDS	492
HSLINCCELLS	493
HSLLOFMSU1	493

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

HSLLOFMSU2	493
HSLLOFMSU3	494
HSLNMSURE	494
HSLNMSUTR	494
HSLNNAREC	495
HSLNSUERR	495
HSLOCNANMLS	495
HSLOUTCELLS	496
HSLTTLRBC	496
ICUICELS_BSC_HSC7Link	496
ILS_BSC_SS7SLMT1	496
ILS_BSC_SS7SLTRAFF	497
INCCELLS_BSC_HSC7Link	497
INITFLRS_BSC_HSC7Link	497
INVLPDUS_BSC_HSC7Link	498
LACKCRED_BSC_HSC7Link	498
LBUSDUR	498
LINHNO	499
LKMTTCST_BSC_C7Link	499
LKMTTCST_BSC_HSC7Link	499
LOCINHDUR	500
LOFMSU1	500
LOFMSU2	500
LOFMSU3	501
LS10SCAN_BSC_C7Link	501
LS10SCAN_BSC_HSC7Link	501
MCHGOVRS_BSC_C7Link	501
MCHGOVRS_BSC_HSC7Link	502
MEMBERCODE_BSC_SS7SLMT1	502
MEMBERCODE_BSC_SS7SLMT2	502
MEMBERCODE_BSC_SS7SLTRAFF	503
MGMTINHB_BSC_C7Link	503
MGMTINHB_BSC_HSC7Link	503
MOCTRGTT_BSC_HSC7Link	504
MSGDISC0_BSC_HSC7Link	504
MSGDISC1_BSC_HSC7Link	504
MSGDISC2_BSC_HSC7Link	505
MSGDISC3_BSC_HSC7Link	505
MSGDISCH_BSC_HSC7Link	505
MSGSRCVD_BSC_HSC7Link	505
MSGSRGTT_BSC_HSC7Link	506
MSGSTRAN_BSC_HSC7Link	506
MSUDISC0_BSC_C7Link	506
MSUDISC1_BSC_C7Link	507
MSUDISC2_BSC_C7Link	507
MSUDISC3_BSC_C7Link	507
MSURCERR_BSC_C7Link	508
MSURECD_BSC_C7Link	508
MSURETRN_BSC_C7Link	508
MSGDISCH_SS7HSLMT1	509
MSGSRCVD_SS7HSLTRAF	509

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MSGSRGTT_SS7HSLTRAF	509
MSGSTRAN_SS7HSLTRAF	509
MSUDISC0	510
MSUDISC1	510
MSUDISC2	510
MSUDISC3	511
MSURCERR	511
MSURECD_MSC_C7Link	511
MSURETRN_MSC_C7Link	512
MSUSRGTT	512
MSUTRAN_MSC_C7Link	512
MTCEUSG	513
MTCEUSG_SS7HSLMT1	513
N10SCAN_MSC_C7Link	513
N10SCAN_SS7HSLMT1	513
NDCFLABN	514
NDCFLHWP	514
NDCFLHWP_SS7HSLMT2	514
NDCFLXDA	515
NDCFLXDA_SS7HSLMT2	515
NDCFLXDC	515
NDCFLXDC_SS7HSLMT2	516
NDCFLXER	516
NDCFLXER_SS7HSLMT2	516
NDISC	517
NEARMGIH	517
NEARMGIH_SS7HSLMT2	517
NEGACKS	517
NLOSS	518
NMDCLFLR	518
NMDCLFLR_SS7HSLMT2	518
NMSURE_ASC_CCITT7	519
NMSURE_C7SL1	519
NMSUTR_ASC_CCITT7	519
NMSUTR_C7SL1	520
NNAREC	520
NOCTRE	520
NOCTRTR	521
NOCTTR	521
NORTRO	521
NSIFSRE	521
NSIFTR	522
NSLALPRFL	522
NSLCO	522
NSLFA	523
NSUERR	523
OCDANMLS_SS7HSLMT3	523
OCTRCGTT	524
OGUICELS_SS7HSLTRAF	524
OUTCELLS_SS7HSLTRAF	524
PDULSTER_SS7HSLMT3	525

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PDUOCTRC_SS7HSLTRAF	525
PDUOCTTR_SS7HSLTRAF	525
PDUSRCVD_SS7HSLTRAF	525
PDUSTRAN_SS7HSLTRAF	526
PDUSUMER_SS7HSLMT3	526
PERLEN	526
PERLEN_C7TM	527
PROSTAT	527
PROTRAN	527
RECVDOCT_MSC_C7Link	527
RECVDOCT_SS7HSLTRAF	528
REMINHDUR	528
RETRNOCT_MSC_C7Link	528
RINHNO	528
SAALINSV_SS7HSLMT3	529
SAMPCNT	529
SAMPCNT_SS7HSLMT1	529
SCANSEC_ASC_CCITT7	530
SDOCTRCV_SS7HSLTRAF	530
SDOCTRTR_SS7HSLTRAF	530
SDOCTTRN_SS7HSLTRAF	531
SDPDURCV_SS7HSLTRAF	531
SDPDURRR_SS7HSLTRAF	531
SDPDURTR_SS7HSLTRAF	532
SDPDUTRN_SS7HSLTRAF	532
SL10SCAN	532
SL10SCAN_SS7HSLMT2	533
SLPARMGP	533
SLPARMGP_SS7HSLMT2	533
SYS7IND_C7SL1	533
SYS7IND_C7SL2	534
TDCNGLV1	534
TDCNGLV1_SS7HSLMT1	534
TDCNGLV2	535
TDCNGLV2_SS7HSLMT1	535
TDCNGLV3	535
TDCNGLV3_SS7HSLMT1	536
THRACHOV	536
THRMSUER	536
THRNEGAK	537
TLNKACTV	537
TLNKACTV_SS7HSLMT1	537
TOTOCMSG_SS7HSLMT1	537
TOTOCMSU	538
TOTOCOCT	538
TOTOCOCT_SS7HSLMT1	538
TOTPRIO0	539
TOTPRIO0_SS7HSLMT1	539
TOTPRIO1	539
TOTPRIO1_SS7HSLMT1	540
TOTPRIO2	540

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TOTPRIO2_SS7HSLMT1	540
TOTPRIO3	541
TOTPRIO3_SS7HSLMT1	541
TRANOCT_MSC_C7Link	541
TRANOCT_SS7HSLTRAF	541
UNAVAILDUR	542
UNAVRBLDUR	542
UNAVSLFDUR	542
UNEXPDUS_SS7HSLMT3	543
MSC_SS7LinkSet Primitive Calculations	543
C7_LSTL_AvgRX	543
C7_LSTL_AvgTX	543
Critical_Carried	543
DIMENSION	544
GRAPHmultiLineSeparator	544
GROWTH	544
INTERVALS	544
Link_Unavailable	544
Link_Usage	544
Links_Q	544
Ln_Correlation	545
Ln_Exhaust_Date	545
Ln_Exhaust_Days	545
MSUS	545
Nominal_Capacity	545
NSLFA	545
NumberMSUsReceived	545
NumberMSUsTransmitted	546
NumberSLFailures	546
NUMDAYS	546
NUMHOURS	546
NumLinks	546
PercentageLinkAvailability	546
PercentageLinksetInService	547
RX_AvgLink	547
RX_MSUS	547
RX_Octets	547
Sample_Size	547
TX_AvgLink	547
TX_MSUS	547
TX_Octets	548
VENDORTECH	548
MSC_SS7LinkSet Peg Counts	548
ASPADUR_MSC	548
ASPINA_MSC	548
AVLINKS	549
AVLINKS_SS7HSLS	549
CLUSTERCODE_MSC_SS7LS	549
ICUICELS_SS7HSLS	549
INCCELLS_SS7HSLS	550
LINKS	550

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

LINKS_SS7HSLs	550
LSMTCST	551
LSMTCST_SS7HSLs	551
MEMBERCODE_MSC_SS7LS	551
MSC_RELEASE	552
MSGSRCVD_SS7HSLs	552
MSGSTRAN_SS7HSLs	552
MSURECD	552
MSURETRN	553
MSUTRAN	553
N10SCAN_MSC_C7LinkSet	553
N10SCAN_SS7HSLs	554
OGUICELs_SS7HSLs	554
OOSLINKs	554
OOSLINKs_SS7HSLs	555
OUTCELLs_SS7HSLs	555
PDUOCTRC_SS7HSLs	555
PDUOCTTR_SS7HSLs	555
PDUSRCVD_SS7HSLs	556
PDUSTRAN_SS7HSLs	556
PERLEN	556
RECVDOCT	556
RECVDOCT_SS7HSLs	557
RETRNOCT	557
SDOCTRCV_SS7HSLs	557
SDOCTRTR_SS7HSLs	558
SDOCTTRN_SS7HSLs	558
SDPDURCV_SS7HSLs	558
SDPDURTR_SS7HSLs	559
SDPDUTRN_SS7HSLs	559
STUNADURAT_MSC	559
SYS7IND_MSC_C7ADJSLP	560
SYS7IND_MSC_C7SLSET	560
TDLSINAC	560
TDLSINAC_SS7HSLs	560
TRANOCT	561
TRANOCT_SS7HSLs	561
UAVLINKs	561
UAVLINKs_SS7HSLs	562
MSC_SS7RouteSet Primitive Calculations	562
C7_RSAV_%	562
GRAPHmultiLineSeparator	562
INTERVALs	562
NUMDAYs	563
NUMHOURs	563
VENDORTECH	563
MSC_SS7RouteSet Peg Counts	563
MSC_RELEASE	563
PERLEN	563
STINACNT_MSC	563
STINADURAT_MSC	564

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SYS7IND_MSC_C7RTSET	564
MSCOutTrunk Primitive Calculations	564
GRAPHmultiLineSeparator	564
NUMDAYS	564
NUMHOURS	565
MSCOutTrunk Peg Counts	565
BANSWCNT	565
CONVLACC	565
IDISCCNT	565
MSC_RELEASE	565
OCONGCNT	565
ODISCCNT	565
OTTIME	565
PERLENSEC	565
SCANCNT	565
SCANNINT	565
THCONCNT	566
TRALACC	566
MSCTrunkDest Primitive Calculations	566
BANSWCNT_TrunkDest	566
CONVLACC_TrunkDest	566
DestinationTraffic_AfterBAnsw	566
DestinationTraffic_BeforeBAnsw	566
GRAPHmultiLineSeparator	566
IDISCCNT_TrunkDest	567
INTERVALS_TRDIP	567
NUMDAYS	567
NUMHOURS	567
OCONGCNT_TrunkDest	567
ODISCCNT_TrunkDest	567
OTTIME_TrunkDest	567
SCANCNT_TrunkDest	568
SCANNINT_TrunkDest	568
THCONCNT_TrunkDest	568
TRALACC_TrunkDest	568
MSCTrunkDest Peg Counts	568
BANSWCNT	568
CONVLACC	569
IDISCCNT	569
MSC_Release	569
OCONGCNT	569
ODISCCNT	570
OTTIME	570
PERLEN_TRDIP	570
SCANCNT	570
SCANNINT	571
THCONCNT	571
TRALACC	571
MSCTrunkType Primitive Calculations	571
GRAPHmultiLineSeparator	572

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

INTERVALS	572
LocalName	572
NUMDAYS	572
NUMHOURS	572
VENDORTECH	572
MSCTrunkType Peg Counts	572
MSC_RELEASE	573
NDISS	573
NDISSBLOC	573
NFAUSBLOC	573
NNOTSEIZE	574
NQUAS	574
NQUASBLOC	574
PERLEN	574
Multiplex_Section Primitive Calculations	575
GRAPHmultiLineSeparator	575
LocalName	575
NUMDAYS	575
NUMHOURS	575
Multiplex_Section Peg Counts	575
MSFBBE	575
MSFES	576
MSFSES	576
MSFUAS	576
MSFUAV	577
MSNBBE	577
MSNES	577
MSNSES	577
MSNUAS	578
MSNUAV	578
PERLEN	578
SMI	579
NB_MSC Primitive Calculations	579
GRAPHmultiLineSeparator	579
INTERVALS	579
LocalName	579
NUMDAYS	579
NUMHOURS	580
VENDORTECH	580
NB_MSC Peg Counts	580
MSC_RELEASE	580
NBIRASDHTOT	580
NBIRATCHTOT	580
NBNSCASUCC	581
NBNSCATOT	581
NBORASDHTOT	581
NBORATCHTOT	582
NBRASDHTOT	582
NBRATCHTOT	582
NBRASDHSUCC	583

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NBRSATCHSUCC	583
NBSCHASUCC	583
NBSCHATOT	584
NBSIRASDHSUCC	584
NBSIRATCHSUCC	584
NBSORASDHSUCC	585
NBSORATCHSUCC	585
NBSRASDHTOT	585
NBSRATCHTOT	586
NBSRATSDHTOT	586
NBSRATTCHTOT	586
NBSSRAATCHSUCC	587
NBSSRASDHSUCC	587
NBSSRATSDHSUCC	587
NBSSRATTCHSUCC	588
NCELHNSUCC	588
NCELHNDDTOT	588
NNBRBUGASCSUCC	589
NNBRBUGASCTOT	589
NNBRBUGASUCC	589
NNBRBUGATOT	590
NNBRBUGSTSUCC	590
NNBRBUGSTTOT	590
NNBRHBAISDHSUCC	591
NNBRHBAISDHTOT	591
NNBRHBANSUCC	591
NNBRHBANTOT	592
NNBRHBAOSDHSUCC	592
NNBRHBAOSDHTOT	592
NNBRHBSTSUCC	592
NNBRHBSTTOT	593
NNBRHBTTSUCC	593
NNBRHBTTTOT	593
NNBRHINASUCC	594
NNBRHINATOT	594
NNBRHSANSUCC	594
NNBRHSANTOT	595
NNBRHSISDHSUCC	595
NNBRHSISDHTOT	595
NNBRHSNASUCC	596
NNBRHSNATOT	596
NNBRHSOSDHSUCC	596
NNBRHSOSDHTOT	597
NNBRHTHISDHSUCC	597
NNBRHTHISDHTOT	597
NNBRHTHISUCC	598
NNBRHTHISTOT	598
NNBRIHOATCHTOT	598
NNBRISDHHOATOT	599
NNBRITCHHOASUCC	599
NNBRNSUGSCASUCC	600

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NNBRNUGSCATOT	600
NNBRSCHARSUCC	600
NNBRSCHARTOT	601
NNBRSCHASSUCC	601
NNBRSCHASTOT	601
NNBRSIHOATCHSUCC	602
NNBRUGSCASUCC	602
NNBRUGSSUCC	602
NNBRUGSTOT	603
NNBRUGSUCC	603
NNBRUGTOT	603
NNBRUGSCATOT	604
NNGSUSCASUCC	604
NNGUHASUCC	604
NNGUHATOT	605
NNGUHBSUCC	605
NNGUHBTOT	605
NNGUHISSUCC	605
NNGUHIOTOT	606
NNGUHISSUCC	606
NNGUHIOTOT	606
NNGUHISSUCC	607
NNGUHSSTOT	607
NNGUHSUCC	607
NNGUHSTOT	608
NNGUHTSSUCC	608
NNGUHTSTOT	608
NNGUHTSUCC	609
NNGUHTTOT	609
NNGUSCATOT	609
NNGUSTSUCC	610
NNGUSTTOT	610
NNSCHASUCC	610
NNSCHATOT	611
PERLEN	611
NBCell Primitive Calculations	611
GRAPHmultiLineSeparator	611
HO_CAUSEALL	611
HO_DIRRETRY	611
HO_DWNLKLV	611
HO_LOST	612
HO_SUC%	612
HO_SUCBTCEL%	612
HO_SUCHIHR%	612
HO_SUCWRCEL%	612
HO_UPLNKLV	612
HOE_LOST	612
HOE_LOST%	613
HOE_SUC	613
HOE_TOT	613
HOI_LOST	613

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

HOI_LOST%	613
HOI_SUC	613
HOI_TOT	614
INTERVALS	614
LocalName	614
NUMDAYS	614
NUMHOURS	614
VENDORTECH	614
NBCell Peg Counts	614
BSS_RELEASE	615
HOASBCL	615
HOASWCL	615
HOATTHR	615
HOATTHSS	616
HOATTLSS	616
HOATTSHOULOUTRAN	617
HODUPFT	617
HODWNQA	617
HOEXCTA	618
HOREQCNTUTRAN	618
HORTTOCH	618
HORTTOCHUTRAN	619
HOSUCBCL	619
HOSUCHR	620
HOSUCWCL	620
HOTOHCS	620
HOTOKCL	621
HOTOLCL	621
HOUPLQA	622
HOVERCNT	622
HOVERCNTUTRAN	622
HOVERSUC	623
HOVERSUCUTRAN	623
NBTYPE	623
PERLEN	623
SUCURGHOUTRAN	623
URGHOVERUTRAN	624
NI Primitive Calculations	624
GRAPHmultiLineSeparator	624
NUMDAYS	624
NUMHOURS	624
ProblemCode Primitive Calculations	625
GRAPHmultiLineSeparator	625
INTERVALS	625
NUMDAYS	625
NUMHOURS	625
VENDORTECH	625
ProblemCode Peg Counts	625
MSC_RELEASE	626
NERRSIT	626

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLEN	626
RECEIVED	626
SENT	626
QOS Primitive Calculations	627
Ave_LLC_PDU_per_TBF	627
Ave_LLC_PDU_Throughput	627
GRAPHmultiLineSeparator	627
INTERVALS	627
LocalName	627
Nof_TBF	627
NUMDAYS	628
NUMHOURS	628
VENDORTECH	628
QOS Peg Counts	628
BSS_RELEASE	628
NUMBERLLCPDU	628
NUMBERTBF	629
PERLEN	629
PFCLIFETIME	629
Radio Primitive Calculations	629
GRAPHmultiLineSeparator	629
NUMDAYS	630
NUMHOURS	630
Radio Peg Counts	630
Transiver_ID	630
RNCSTAT Primitive Calculations	630
GRAPHmultiLineSeparator	630
NUMDAYS	630
NUMHOURS	630
VENDORTECH	631
RNCSTAT Peg Counts	631
MSC_RELEASE	631
NBSTSSMTOT	631
NRNFRMSCCI	631
NRNFRMTOTI	632
NRNFRRTOT	632
NRNTIHRSUCC	632
NRNTIHRUSUCC	632
NRNTLRCTOT	633
NRNTLRDRTOT	633
NRNTLRDSUCC	633
NRNTLRSUCC	634
NRNTOHRSUCC	634
NRNTOMSCCO	634
NRNTOMTOTO	635
NRNTORGSUCC	635
NRNTORRTOT	635
NRNTRRCTOT	636
NRNTRRRGTOT	636
NRNTRRRTOT	636

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NRNTSRRTOT	637
NRNTSRRUTOT	637
PERLEN	637
RXOTS Primitive Calculations	637
GRAPHmultiLineSeparator	637
INTERVALS	637
NUMDAYS	638
NUMHOURS	638
VENDORTECH	638
RXOTS Peg Counts	638
BSS_RELEASE	638
CONCNT	638
CONERRCNT	639
ID1_MOTS	639
ID2_MOTS	639
PERLEN	639
SAE Primitive Calculations	640
GRAPHmultiLineSeparator	640
INTERVALS	640
NUMDAYS	640
NUMHOURS	640
VENDORTECH	640
SAE Peg Counts	640
ID1_MSC_SAE	640
ID2_MSC_SAE	641
MSC_RELEASE	641
NCALLS_MSC_SAE	641
NIND_MSC_SAE	641
NOVERFLOW_MSC_SAE	642
NSCAN_MSC_SAE	642
NTRAL_MSC_SAE	642
NTRALACC_MSC_SAE	643
PERLEN	643
SAE_Block Primitive Calculations	643
GRAPHmultiLineSeparator	643
NUMDAYS	643
NUMHOURS	643
ServFeature_MSC Primitive Calculations	644
GRAPHmultiLineSeparator	644
NUMDAYS	644
NUMHOURS	644
ServFeature_MSC Peg Counts	644
NSERVFEATINV	644
SGSN_MSC Primitive Calculations	644
GRAPHmultiLineSeparator	644
NUMDAYS	645
NUMHOURS	645
SGSN_MSC Peg Counts	645
NPAG1SGSNTOT	645
NPAG2SGSNTOT	645

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NSGSNRESETREC	645
NSGSNRESETSENT	645
SPG Primitive Calculations	645
GRAPHmultiLineSeparator	645
NUMDAYS	645
NUMHOURS	646
SPNode Primitive Calculations	646
GRAPHmultiLineSeparator	646
INTERVALS	646
NUMDAYS	646
NUMHOURS	646
VENDORTECH	646
SPNode Peg Counts	647
ACCFRPM	647
ACCLoad	647
ACCSPIST	647
BSS_RELEASE	648
DATAlostFLAG_SPSP	648
MAXFRPM	648
MINFRPM	648
NOLRGUPFMS	649
NOSMUPFMS	649
NPERREL	649
NPERRES	650
NREL_A_SPSP	650
NRELM_SPSP	650
NRESA	650
NRESM	651
NSCAN	651
PERLEN	651
SIZEPM	651
Subcell Primitive Calculations	652
GRAPHmultiLineSeparator	652
NUMDAYS	652
NUMHOURS	652
Subcell Peg Counts	652
AMR_Connection_Filter	652
BSPOWER_10Range_10	653
BSPOWER_12Range_12	653
BSPOWER_14Range_14	653
BSPOWER_16Range_16	653
BSPOWER_18Range_18	653
BSPOWER_20Range_20	653
BSPOWER_22Range_22	653
BSPOWER_24Range_24	654
BSPOWER_26Range_26	654
BSPOWER_28Range_28	654
BSPOWER_2Range_2	654
BSPOWER_30Range_30	654
BSPOWER_4Range_4	654

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

BSPOWER_6Range_6	655
BSPOWER_8Range_8	655
BSPOWER0Range0	655
CellSetName	655
MSPOWER0Range0	655
MSPOWER10Range10	655
MSPOWER11Range11	655
MSPOWER12Range12	656
MSPOWER13Range13	656
MSPOWER14Range14	656
MSPOWER15Range15	656
MSPOWER16Range16	656
MSPOWER17Range17	656
MSPOWER18Range18	657
MSPOWER19Range19	657
MSPOWER1Range1	657
MSPOWER20Range20	657
MSPOWER21Range21	657
MSPOWER22Range22	657
MSPOWER23Range23	657
MSPOWER24Range24	658
MSPOWER25Range25	658
MSPOWER26Range26	658
MSPOWER27Range27	658
MSPOWER28Range28	658
MSPOWER29Range29	658
MSPOWER2Range2	659
MSPOWER30Range30	659
MSPOWER31Range31	659
MSPOWER32Range32	659
MSPOWER33Range33	659
MSPOWER34Range34	659
MSPOWER35Range35	659
MSPOWER36Range36	660
MSPOWER37Range37	660
MSPOWER38Range38	660
MSPOWER39Range39	660
MSPOWER3Range3	660
MSPOWER4Range4	660
MSPOWER5Range5	661
MSPOWER6Range6	661
MSPOWER7Range7	661
MSPOWER8Range8	661
MSPOWER9Range9	661
noOfMeasFiltered	661
noOfMeasUnfiltered	661
PATHLOSSDIFF_10Range_10	662
PATHLOSSDIFF_11Range_11	662
PATHLOSSDIFF_12Range_12	662
PATHLOSSDIFF_13Range_13	662
PATHLOSSDIFF_14Range_14	662

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSDIFF_15Range_15662
PATHLOSSDIFF_16Range_16663
PATHLOSSDIFF_17Range_17663
PATHLOSSDIFF_18Range_18663
PATHLOSSDIFF_19Range_19663
PATHLOSSDIFF_1Range_1663
PATHLOSSDIFF_20Range_20663
PATHLOSSDIFF_21Range_21663
PATHLOSSDIFF_22Range_22664
PATHLOSSDIFF_23Range_23664
PATHLOSSDIFF_24Range_24664
PATHLOSSDIFF_25Range_25664
PATHLOSSDIFF_2Range_2664
PATHLOSSDIFF_3Range_3664
PATHLOSSDIFF_4Range_4665
PATHLOSSDIFF_5Range_5665
PATHLOSSDIFF_6Range_6665
PATHLOSSDIFF_7Range_7665
PATHLOSSDIFF_8Range_8665
PATHLOSSDIFF_9Range_9665
PATHLOSSDIFF0Range0665
PATHLOSSDIFF10Range10666
PATHLOSSDIFF11Range11666
PATHLOSSDIFF12Range12666
PATHLOSSDIFF13Range13666
PATHLOSSDIFF14Range14666
PATHLOSSDIFF15Range15666
PATHLOSSDIFF16Range16667
PATHLOSSDIFF17Range17667
PATHLOSSDIFF18Range18667
PATHLOSSDIFF19Range19667
PATHLOSSDIFF1Range1667
PATHLOSSDIFF20Range20667
PATHLOSSDIFF21Range21667
PATHLOSSDIFF22Range22668
PATHLOSSDIFF23Range23668
PATHLOSSDIFF24Range24668
PATHLOSSDIFF25Range25668
PATHLOSSDIFF2Range2668
PATHLOSSDIFF3Range3668
PATHLOSSDIFF4Range4669
PATHLOSSDIFF5Range5669
PATHLOSSDIFF6Range6669
PATHLOSSDIFF7Range7669
PATHLOSSDIFF8Range8669
PATHLOSSDIFF9Range9669
PATHLOSSDL100Range101669
PATHLOSSDL102Range103670
PATHLOSSDL104Range105670
PATHLOSSDL106Range107670
PATHLOSSDL108Range109670

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSDL110Range111	670
PATHLOSSDL112Range113	670
PATHLOSSDL114Range115	671
PATHLOSSDL116Range117	671
PATHLOSSDL118Range119	671
PATHLOSSDL120Range121	671
PATHLOSSDL122Range123	671
PATHLOSSDL124Range125	671
PATHLOSSDL126Range127	671
PATHLOSSDL128Range129	672
PATHLOSSDL130Range131	672
PATHLOSSDL132Range133	672
PATHLOSSDL134Range135	672
PATHLOSSDL136Range137	672
PATHLOSSDL138Range139	672
PATHLOSSDL140Range141	673
PATHLOSSDL142Range143	673
PATHLOSSDL144Range145	673
PATHLOSSDL146Range147	673
PATHLOSSDL148Range149	673
PATHLOSSDL150Range151	673
PATHLOSSDL152Range153	673
PATHLOSSDL154Range155	674
PATHLOSSDL156Range157	674
PATHLOSSDL158Range190	674
PATHLOSSDL30Range31	674
PATHLOSSDL32Range33	674
PATHLOSSDL34Range35	674
PATHLOSSDL36Range37	675
PATHLOSSDL38Range39	675
PATHLOSSDL40Range41	675
PATHLOSSDL42Range43	675
PATHLOSSDL44Range45	675
PATHLOSSDL46Range47	675
PATHLOSSDL48Range49	675
PATHLOSSDL50Range51	676
PATHLOSSDL52Range53	676
PATHLOSSDL54Range55	676
PATHLOSSDL56Range57	676
PATHLOSSDL58Range59	676
PATHLOSSDL60Range61	676
PATHLOSSDL62Range63	677
PATHLOSSDL64Range65	677
PATHLOSSDL66Range67	677
PATHLOSSDL68Range69	677
PATHLOSSDL70Range71	677
PATHLOSSDL72Range73	677
PATHLOSSDL74Range75	677
PATHLOSSDL76Range77	678
PATHLOSSDL78Range79	678
PATHLOSSDL80Range81	678

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSDL82Range83	.678
PATHLOSSDL84Range85	.678
PATHLOSSDL86Range87	.678
PATHLOSSDL88Range89	.679
PATHLOSSDL90Range91	.679
PATHLOSSDL92Range93	.679
PATHLOSSDL94Range95	.679
PATHLOSSDL96Range97	.679
PATHLOSSDL98Range99	.679
PATHLOSSUL100Range101	.679
PATHLOSSUL102Range103	.680
PATHLOSSUL104Range105	.680
PATHLOSSUL106Range107	.680
PATHLOSSUL108Range109	.680
PATHLOSSUL110Range111	.680
PATHLOSSUL112Range113	.680
PATHLOSSUL114Range115	.681
PATHLOSSUL116Range117	.681
PATHLOSSUL118Range119	.681
PATHLOSSUL120Range121	.681
PATHLOSSUL122Range123	.681
PATHLOSSUL124Range125	.681
PATHLOSSUL126Range127	.681
PATHLOSSUL128Range129	.682
PATHLOSSUL130Range131	.682
PATHLOSSUL132Range133	.682
PATHLOSSUL134Range135	.682
PATHLOSSUL136Range137	.682
PATHLOSSUL138Range139	.682
PATHLOSSUL140Range141	.683
PATHLOSSUL142Range143	.683
PATHLOSSUL144Range145	.683
PATHLOSSUL146Range147	.683
PATHLOSSUL148Range153	.683
PATHLOSSUL30Range31	.683
PATHLOSSUL32Range33	.683
PATHLOSSUL34Range35	.684
PATHLOSSUL36Range37	.684
PATHLOSSUL38Range39	.684
PATHLOSSUL40Range41	.684
PATHLOSSUL42Range43	.684
PATHLOSSUL44Range45	.684
PATHLOSSUL46Range47	.685
PATHLOSSUL48Range49	.685
PATHLOSSUL50Range51	.685
PATHLOSSUL52Range53	.685
PATHLOSSUL54Range55	.685
PATHLOSSUL56Range57	.685
PATHLOSSUL58Range59	.685
PATHLOSSUL60Range61	.686
PATHLOSSUL62Range63	.686

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSUL64Range65	686
PATHLOSSUL66Range67	686
PATHLOSSUL68Range69	686
PATHLOSSUL70Range71	686
PATHLOSSUL72Range73	687
PATHLOSSUL74Range75	687
PATHLOSSUL76Range77	687
PATHLOSSUL78Range79	687
PATHLOSSUL80Range81	687
PATHLOSSUL82Range83	687
PATHLOSSUL84Range85	687
PATHLOSSUL86Range87	688
PATHLOSSUL88Range89	688
PATHLOSSUL90Range91	688
PATHLOSSUL92Range93	688
PATHLOSSUL94Range95	688
PATHLOSSUL96Range97	688
PATHLOSSUL98Range99	689
PERLENSEC	689
RXLEVDL0Range0	689
RXLEVDL10Range10	689
RXLEVDL11Range11	689
RXLEVDL12Range12	689
RXLEVDL13Range13	689
RXLEVDL14Range14	690
RXLEVDL15Range15	690
RXLEVDL16Range16	690
RXLEVDL17Range17	690
RXLEVDL18Range18	690
RXLEVDL19Range19	690
RXLEVDL1Range1	691
RXLEVDL20Range20	691
RXLEVDL21Range21	691
RXLEVDL22Range22	691
RXLEVDL23Range23	691
RXLEVDL24Range24	691
RXLEVDL25Range25	691
RXLEVDL26Range26	692
RXLEVDL27Range27	692
RXLEVDL28Range28	692
RXLEVDL29Range29	692
RXLEVDL2Range2	692
RXLEVDL30Range30	692
RXLEVDL31Range31	693
RXLEVDL32Range32	693
RXLEVDL33Range33	693
RXLEVDL34Range34	693
RXLEVDL35Range35	693
RXLEVDL36Range36	693
RXLEVDL37Range37	693
RXLEVDL38Range38	694

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXLEVDL39Range39	694
RXLEVDL3Range3	694
RXLEVDL40Range40	694
RXLEVDL41Range41	694
RXLEVDL42Range42	694
RXLEVDL43Range43	695
RXLEVDL44Range44	695
RXLEVDL45Range45	695
RXLEVDL46Range46	695
RXLEVDL47Range47	695
RXLEVDL48Range48	695
RXLEVDL49Range49	695
RXLEVDL4Range4	696
RXLEVDL50Range50	696
RXLEVDL51Range51	696
RXLEVDL52Range52	696
RXLEVDL53Range53	696
RXLEVDL54Range54	696
RXLEVDL55Range55	697
RXLEVDL56Range56	697
RXLEVDL57Range57	697
RXLEVDL58Range58	697
RXLEVDL59Range59	697
RXLEVDL5Range5	697
RXLEVDL60Range60	697
RXLEVDL61Range61	698
RXLEVDL62Range62	698
RXLEVDL63Range63	698
RXLEVDL6Range6	698
RXLEVDL7Range7	698
RXLEVDL8Range8	698
RXLEVDL9Range9	699
RXLEVUL0Range0	699
RXLEVUL10Range10	699
RXLEVUL11Range11	699
RXLEVUL12Range12	699
RXLEVUL13Range13	699
RXLEVUL14Range14	699
RXLEVUL15Range15	700
RXLEVUL16Range16	700
RXLEVUL17Range17	700
RXLEVUL18Range18	700
RXLEVUL19Range19	700
RXLEVUL1Range1	700
RXLEVUL20Range20	701
RXLEVUL21Range21	701
RXLEVUL22Range22	701
RXLEVUL23Range23	701
RXLEVUL24Range24	701
RXLEVUL25Range25	701
RXLEVUL26Range26	701

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXLEVUL27Range27	702
RXLEVUL28Range28	702
RXLEVUL29Range29	702
RXLEVUL2Range2	702
RXLEVUL30Range30	702
RXLEVUL31Range31	702
RXLEVUL32Range32	703
RXLEVUL33Range33	703
RXLEVUL34Range34	703
RXLEVUL35Range35	703
RXLEVUL36Range36	703
RXLEVUL37Range37	703
RXLEVUL38Range38	703
RXLEVUL39Range39	704
RXLEVUL3Range3	704
RXLEVUL40Range40	704
RXLEVUL41Range41	704
RXLEVUL42Range42	704
RXLEVUL43Range43	704
RXLEVUL44Range44	705
RXLEVUL45Range45	705
RXLEVUL46Range46	705
RXLEVUL47Range47	705
RXLEVUL48Range48	705
RXLEVUL49Range49	705
RXLEVUL4Range4	705
RXLEVUL50Range50	706
RXLEVUL51Range51	706
RXLEVUL52Range52	706
RXLEVUL53Range53	706
RXLEVUL54Range54	706
RXLEVUL55Range55	706
RXLEVUL56Range56	707
RXLEVUL57Range57	707
RXLEVUL58Range58	707
RXLEVUL59Range59	707
RXLEVUL5Range5	707
RXLEVUL60Range60	707
RXLEVUL61Range61	707
RXLEVUL62Range62	708
RXLEVUL63Range63	708
RXLEVUL6Range6	708
RXLEVUL7Range7	708
RXLEVUL8Range8	708
RXLEVUL9Range9	708
RXQUALDL0Range0	709
RXQUALDL1Range1	709
RXQUALDL2Range2	709
RXQUALDL3Range3	709
RXQUALDL4Range4	709
RXQUALDL5Range5	709

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXQUALDL6Range6	709
RXQUALDL7Range7	710
RXQUALUL0Range0	710
RXQUALUL1Range1	710
RXQUALUL2Range2	710
RXQUALUL3Range3	710
RXQUALUL4Range4	710
RXQUALUL5Range5	711
RXQUALUL6Range6	711
RXQUALUL7Range7	711
TAVAL0Range0	711
TAVAL104Range113	711
TAVAL10Range10	711
TAVAL114Range123	711
TAVAL11Range11	712
TAVAL124Range133	712
TAVAL12Range12	712
TAVAL134Range143	712
TAVAL13Range13	712
TAVAL144Range163	712
TAVAL14Range14	713
TAVAL15Range15	713
TAVAL164Range183	713
TAVAL16Range16	713
TAVAL17Range17	713
TAVAL184Range203	713
TAVAL18Range18	713
TAVAL19Range19	714
TAVAL1Range1	714
TAVAL204Range219	714
TAVAL20Range20	714
TAVAL21Range21	714
TAVAL22Range22	714
TAVAL23Range23	715
TAVAL24Range24	715
TAVAL25Range25	715
TAVAL26Range26	715
TAVAL27Range27	715
TAVAL28Range28	715
TAVAL29Range29	715
TAVAL2Range2	716
TAVAL30Range30	716
TAVAL31Range31	716
TAVAL32Range32	716
TAVAL33Range33	716
TAVAL34Range34	716
TAVAL35Range35	717
TAVAL36Range36	717
TAVAL37Range37	717
TAVAL38Range38	717
TAVAL39Range39	717

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TAVAL3Range3	717
TAVAL40Range40	717
TAVAL41Range41	718
TAVAL42Range42	718
TAVAL43Range43	718
TAVAL44Range44	718
TAVAL45Range45	718
TAVAL46Range46	718
TAVAL47Range47	719
TAVAL48Range48	719
TAVAL49Range49	719
TAVAL4Range4	719
TAVAL50Range50	719
TAVAL51Range51	719
TAVAL52Range52	719
TAVAL53Range53	720
TAVAL54Range54	720
TAVAL55Range55	720
TAVAL56Range56	720
TAVAL57Range57	720
TAVAL58Range58	720
TAVAL59Range59	721
TAVAL5Range5	721
TAVAL60Range60	721
TAVAL61Range61	721
TAVAL62Range62	721
TAVAL63Range63	721
TAVAL64Range73	721
TAVAL6Range6	722
TAVAL74Range83	722
TAVAL7Range7	722
TAVAL84Range93	722
TAVAL8Range8	722
TAVAL94Range103	722
TAVAL9Range9	723
Subsystem_Number Primitive Calculations	723
GRAPHmultiLineSeparator	723
NUMDAYS	723
NUMHOURS	723
Subsystem_Number Peg Counts	723
COMINCINT	723
COMOUTINT	724
COMSGORIG	724
COMSGTERM	724
DT1ORIG	725
DT1TERM	725
PERLEN	725
Super_Channel Primitive Calculations	725
GRAPHmultiLineSeparator	725
NUMDAYS	725

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	726
Super_Channel Peg Counts	726
AVDELDLSCBUF	726
AVDELULSCBUF	726
DL7075SCLOAD	726
DL7680SCLOAD	727
DL8185SCLOAD	727
DL8690SCLOAD	727
DL9195SCLOAD	728
DL9600SCLOAD	728
DLCSSCBUFTHR	728
DLPSSCBUFTHR	729
KBMAXREC	729
KBMAXSENT	729
KBREC	730
KBSCAN	730
KBSENT	730
LOSTDLPACK	731
LOSTULPACK	731
SC	731
SCGR	732
THRDLPACK	732
THRULPACK	732
TOTDLPSSCFRBUF	733
TOTFRDLSCBUF	733
TOTFRULSCBUF	733
TOTULPSSCFRBUF	734
UL7075SCLOAD	734
UL7680SCLOAD	734
UL8185SCLOAD	735
UL8690SCLOAD	735
UL9195SCLOAD	735
UL9600SCLOAD	736
ULPSSCBUFTHR	736
ULSCBUFTHR	736
SUPPSERVICE Primitive Calculations	737
GRAPHmultiLineSeparator	737
INTERVALS	737
LocalName	737
NUMDAYS	737
NUMHOURS	737
VENDORTECH	737
SUPPSERVICE Peg Counts	738
MSC_RELEASE	738
NSSINTTOT	738
NSSINVTOT	738
NSSIT1TOT	738
NSSIT2TOT	739
NSSIV1TOT	739
NSSIV2TOT	739

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NSSIVS1TOT	740
NSSIVS2TOT	740
NSSIVSTOT	740
NSSRETTOT	741
NSSRT1TOT	741
NSSRT2TOT	741
PERLEN	741
Switch_Netw_Terminal Primitive Calculations	742
GRAPHmultiLineSeparator	742
NUMDAYS	742
NUMHOURS	742
Switch_Netw_Terminal Peg Counts	742
BLOL	742
NBLOCACC	743
NDEV	743
PERLEN	743
Synchr_Digi_paths Primitive Calculations	743
GRAPHmultiLineSeparator	743
NUMDAYS	744
NUMHOURS	744
System Primitive Calculations	744
GRAPHmultiLineSeparator	744
NUMDAYS	744
NUMHOURS	744
PercentActiveSubscribers	744
PercentRegisteredSubscribers	745
pTotalGGSNPacketSuccessRate	745
pTotalSessionManSuccessRateGGSN	745
RegisteredInroamers	745
RegisteredOutroamer	745
SubscribersHLR	745
SubscribersVLR	745
TotalCellTCHTraffic	746
TotalSwitchedTraffic	746
TCAP_Obj Primitive Calculations	746
GRAPHmultiLineSeparator	746
INTERVALS	746
NUMDAYS	746
NUMHOURS	746
VENDORTECH	747
TCAP_Obj Peg Counts	747
DETECT	747
MSC_RELEASE	747
PERLEN	747
RECEIVED_TCCMP	747
RECEIVED_TCDIA	748
RECEIVED_TCMMSG	748
SENT_TCCMP	748
SENT_TCDIA	748
SENT_TCMMSG	749

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

URECEIVED	749
USENT	749
TCAP_SubSystem Primitive Calculations	750
GRAPHmultiLineSeparator	750
INTERVALS	750
NUMDAYS	750
NUMHOURS	750
VENDORTECH	750
TCAP_SubSystem Peg Counts	751
MSC_RELEASE	751
NMSGDLVDSSN	751
NMSGORIGSSN	751
PERLEN	751
Time_Slot Primitive Calculations	751
GRAPHmultiLineSeparator	752
INTERVALS	752
NUMDAYS	752
NUMHOURS	752
Time_Slot Peg Counts	752
BSS_RELEASE	752
CONCNT	752
CONERRCNT	753
ID1_MOTS	753
ID2_MOTS	753
PERLEN	754
TrafficType Primitive Calculations	754
AnsSwitchedCalls	754
FailedSwitchedCalls	754
GRAPHmultiLineSeparator	754
INTERVALS	754
INTERVALS_TRART	754
NANSW	754
NCALLS	755
NECONG	755
NICONG	755
NSCAN	755
NTRALACC	755
NUMDAYS	755
NUMHOURS	755
NUNSUC	756
PercentageAnsweredSwitchedCalls	756
PercentageFailedSwitchedCalls	756
SwitchedAttmpt	756
SwitchedCalls	756
SwitchedTraffic	756
TT_AnsBidRatio	756
TT_AnsSeizeRatio	757
TT_RejCalls	757
TT_Seizures	757
TT_Traffic	757

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

VENDORTECH	757
TrafficType Peg Counts	757
MSC_RELEASE	757
NANSW_MTRAFTYPE	758
NANSW_TRAFFTYPE	758
NAREPLACE	758
NBLOBY	758
NBLOOY	759
NBUSY	759
NCALLS_MTRAFTYPE	759
NCALLS_TRAFFTYPE	760
NCONSIG	760
NDVB	760
NDVO	761
NECONG_MTRAFTYPE	761
NECONG_TRAFFTYPE	761
NFAULTSIG	762
NICONG_MTRAFTYPE	762
NICONG_TRAFFTYPE	762
NINACC	763
NISDNCALLS	763
NLKPDSIG	763
NNMBLOC	763
NNONEX	764
NRELAFTD	764
NRELBEFD	764
NRELDURD	765
NSCAN_MTRAFTYPE	765
NSCAN_TRAFFTYPE	765
NSUEOS	766
NTHCON	766
NTIMEOUT	766
NTOBEFD	767
NTODURD	767
NTRALACC_MTRAFTYPE	767
NTRALACC_TRAFFTYPE	767
NUNSUCCE_MTRAFTYPE	768
NUNSUCCE_TRAFFTYPE	768
PERLEN	768
PERLEN_TRART	769
TRAL_MTRAFTYPE	769
TRAL_TRAFFTYPE	769
TrafficOrigin Primitive Calculations	769
GRAPHmultiLineSeparator	769
LocalName	769
NUMDAYS	770
NUMHOURS	770
Transceiver_Group Primitive Calculations	770
GRAPHmultiLineSeparator	770
NUMDAYS	770

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	770
Transceiver_Group Peg Counts	770
AVG16K	771
AVG64K	771
BSS_Release	771
BUNDG0AVEDL	771
BUNDG1AVEDL	772
BUNDG2AVEDL	772
BUNDG3AVEDL	772
BUNDG4AVEDL	773
CSDISCOVL	773
DL0025JITBUFDEL	773
DL100JITBUFDEL	774
DL100STNLOAD	774
DL2650JITBUFDEL	774
DL5175JITBUFDEL	775
DL7075STNLOAD	775
DL7600JITBUFDEL	775
DL7680STNLOAD	776
DL8185STNLOAD	776
DL8690STNLOAD	776
DL9195STNLOAD	777
DL9600STNLOAD	777
DLDROPJBUF	777
DLJITBUFAVDEL	778
FRAG64K	778
ID1	778
ID2	779
INTERCNT	779
IPDLSENTPACK	779
IPLOSTPACKUL	780
IPNUMSCAN	780
IPOVLL1	780
IPOVLL2	781
IPRECKBYTES	781
IPSENTKBYTES	781
IPULRECPACK	781
MAX16K	782
MAX64K	782
MIN16K	783
MIN64K	783
PERLEN	783
PSDISCOVL	783
TG_ID	784
TRASYNCCNT	784
UL0025JITBUFDEL	784
UL100JITBUFDEL	784
UL100STNLOAD	785
UL2650JITBUFDEL	785
UL5175JITBUFDEL	785
UL7075STNLOAD	786

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

UL7600JITBUFDEL	786
UL7680STNLOAD	786
UL8185STNLOAD	787
UL8690STNLOAD	787
UL9195STNLOAD	787
UL9600STNLOAD	788
ULDROPIBUF	788
ULJITBUFAVDEL	788
Transcoder_Subpool Primitive Calculations	789
GRAPHmultiLineSeparator	789
NUMDAYS	789
NUMHOURS	789
Transcoder_Subpool Peg Counts	789
PERLEN	789
TPSUBACTR	789
TPSUBAVTR	790
TPSUBIDLTR	790
TRC Primitive Calculations	790
GRAPHmultiLineSeparator	790
INTERVALS	790
LocalName	791
NUMDAYS	791
NUMHOURS	791
VENDORTECH	791
TRC Peg Counts	791
ALLOCATERATP	791
ATERCONG	792
AVATERTRCDEV	792
BLATERTRCDEV	792
BSS_RELEASE	793
ID1_ATERTRANS	793
PERLEN	793
SALLOCATERATP	793
SZATERTRCDEV	793
SZSATERTRCDEV	794
TRCNSCAN	794
TRD Primitive Calculations	794
GRAPHmultiLineSeparator	794
INTERVALS	795
LocalName	795
NUMDAYS	795
NUMHOURS	795
VENDORTECH	795
TRD Peg Counts	795
BSS_RELEASE	795
ID1_TRAPEVENT	796
PERLEN	796
TPACC	796
TPACTTR	796
TPALLOC	797

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TPAVTR	797
TPCONG	797
TPCTIME	798
TPIDLTR	798
TPSYNCF	798
TPTFOEST	799
TPTFOESTATT	799
TrunkRoute Primitive Calculations	799
AnswerSeizureRatio_Percentage	799
BanswersIncomingRoute	799
BanswersOutgoingRoute	800
Circuits_Available	800
Congestion%	800
DIMENSION	800
GRAPHmultiLineSeparator	800
GROWTH	800
INTERVALS	800
INTERVALS_TRAR	801
NANSWERS_BW	801
NCALLS_BW	801
NISUPATP_BW	801
NOVERFLOW_BW	801
NRESTRICT_BW	801
NSEMIPERC_BW	801
NTRALACC_TRUNKROUTE_BW	802
NumberOfBAnswers	802
NumberOfBids	802
NUMDAYS	802
NUMHOURS	802
PercentageCongestion	802
PercentAnswerSeizeRatio	802
PercentSuccessCalls	803
Sample_Size	803
TR_Correlation	803
TR_Critical_Carried	803
TR_Critical_Offerred	803
TR_Current_Util%	803
TR_Est_GOS	803
TR_Est_Lost	804
TR_Exhaust_Date	804
TR_Exhaust_Days	804
TR_ExtraCircit_Req	804
TR_Final_Util%	804
TR_Forecast_Value1	804
TR_Forecast_Value2	805
TR_Forecast_Value3	805
TR_GOS	805
TR_N1Days_FCAST	805
TR_N2Days_FCAST	805
TR_N3Days_FCAST	805
TR_PABH3	805

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TR_PABH5	806
TR_Req_Ch	806
TR_Traffic	806
TR_Traffic_Off	806
TR_Traffic_OneWay	806
TR_Util_Offered	806
Traffic	807
TrafficBW	807
TrafficInc	807
TrafficOut	807
TRAL_TRUNKROUTE_BW	807
TrunkCallAttempts	807
VENDORTECH	807
TrunkRoute Peg Counts	808
ACCTRAFCNTR	808
BANS	808
BBLOL	808
BLKDDEVS	809
BLOL_TRUNKROUTE	809
ID1_TRUNKROUTE	809
ID2_TRUNKROUTE	810
LASTCONGCNT	810
MSC_RELEASE	810
NANSWERSI	810
NANSWERSO	811
NBBLOCACC	811
NBIDS_TRAR	811
NBLOCACC_TRUNKROUTE	811
NC7DSEIZ	812
NCALLSI	812
NCALLSO	812
NCONGBAS	813
NCONGTRANS	813
NDEV_TRAR	813
NDEV_TRUNKROUTE	814
NDSEIZ	814
NISUPATPI	814
NISUPATPO	815
NOSEIZ_TRUNKROUTE	815
NOVERFLOWI	815
NOVERFLOWO	815
NRESTRICTI	816
NRESTRICTO	816
NSCAN_TRUNKROUTE	816
NSEMIPERCI	817
NSEMIPERCO	817
NTRALACCI_TRUNKROUTE	817
NTRALACCO_TRUNKROUTE	818
PERLEN	818
PERLEN_TRAR	818
RESTRDEVCNT	818

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SUMTRAFVL	818
THROUGHRTCNT	819
TRALI_TRUNKROUTE	819
TRALO_TRUNKROUTE	819
TRK_TYPE	820
UNSUC_BIDS	820
VLR Primitive Calculations	820
GRAPHmultiLineSeparator	820
INTERVALS	820
NUMDAYS	821
NUMHOURS	821
VENDORTECH	821
VLR Peg Counts	821
MSC_RELEASE	821
NACTIVSS	821
NACTTRAC	822
NBEGACT	822
NCANCEL	822
NDEACTRA	823
NDEACTSS	823
NDELETE	823
NERASESS	823
NINSERT	824
NINTRRSS	824
NPROROA	824
NPRSINFO	825
NPURGEMS	825
NPUSSDAR	825
NPUSSRQR	826
NREGPASS	826
NREGTRSS	826
NUPDLOC	827
NUSSDNTS	827
NUSSDRQS	827
NVLRSVAVTOT	828
NVLRSVSDTOT	828
NVLRSVCDSSUC	828
NVLRSVCDTOT	828
PERLEN	829
TFV2CONGSHOSUB	831
TFV2CONGSSUB	831
TFV2FER	831
TFV2FERTF	832
TFV2NSCAN	832
TFV2NSCANSUB	832
TFV2TCONGS	832
TFV2TCONSUS	833
TFV2TRALACC	833
TFV2TRALSUS	833
TFV3CALLS	834
TFV3CALLSSUS	834

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TFV3CM1DL	834
TFV3CM1UL	835
TFV3CM2DL	835
TFV3CM2UL	835
TFV3CM3DL	836
TFV3CM3UL	836
TFV3CM4DL	836
TFV3CM4UL	836
TFV3CONGSAS	837
TFV3CONGSASSUB	837
TFV3CONGSHO	837
TFV3CONGSHOSUB	838
TFV3FERCM1	838
TFV3FERCM2	838
TFV3FERCM3	839
TFV3FERCM4	839
TFV3NSCAN	839
TFV3TCONGS	840
TFV3TCONSUB	840
TFV3TFCM1	840
TFV3TFCM2	840
TFV3TFCM3	841
TFV3TFCM4	841
TFV3TRALACC	841
TFV3TRALSUB	842
TH1DLFER	842
TH1DLSUBFER	842
TH1ULFER	843
TH1ULSUBFER	843
TH2DLFER	843
TH2DLSUBFER	844
TH2ULFER	844
TH2ULSUBFER	844
TH3DLFER	845
TH3DLSUBFER	845
TH3ULFER	845
TH3ULSUBFER	846
TH4DLFER	846
TH4DLSUBFER	846
TH4ULFER	847
TH4ULSUBFER	847
TH5DLFER	847
TH5DLSUBFER	848
TH5ULFER	848
TH5ULSUBFER	848
THCALLS	849
THCALLSSUB	849
THCASSALL	849
THCASSALLSUB	849
THCONGSAS	850
THCONGSASSUB	850

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

THCONGSHO	850
THCONGSHOSUB	851
THDISFERBL	851
THDISFERBLA	851
THDISFERBLSUB	852
THDISFERBLSUBA	852
THDISFERDL	852
THDISFERDLA	853
THDISFERDLSUB	853
THDISFERDLSUBA	853
THDISFERUL	853
THDISFERULA	854
THDISFERULSUB	854
THDISFERULSUBA	854
THDISQABL	855
THDISQABLA	855
THDISQABLSUB	855
THDISQABLSUBA	856
THDISQADL	856
THDISQADLA	856
THDISQADLSUB	857
THDISQADLSUBA	857
THDISQAUL	857
THDISQAULA	857
THDISQAULSUB	858
THDISQAULSUBA	858
THDISSBL	858
THDISSBLA	859
THDISSBLSUB	859
THDISSBLSUBA	859
THDISSDL	860
THDISSDLA	860
THDISSDLSUB	860
THDISSDLSUBA	861
THDISSS1	861
THDISSS2	861
THDISSS3	861
THDISSS4	862
THDISSS5	862
THDISSUL	862
THDISSULA	863
THDISSULSUB	863
THDISSULSUBA	863
THDISTA	864
THDISTAA	864
THFERBLDIS0	864
THFERDLDIS0	865
THFERULDIS0	865
THMSESTB	865
THMSESTBSUB	865
THNCEDROP	866

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

THNCEDROPSUB	866
THNDROP	866
THNDROP0	867
THNDROPSUB	867
THNRELCONG	867
THNRELCONGSUB	868
THNSCAN	868
THNSCAN_SUM	868
THQABLDIS0	869
THQADLDIS0	869
THQAULDIS0	869
THSAICTRALACC	870
THSPV1DTMSUC	870
THSPV3DTMSUC	870
THSSBLDIS0	870
THSSDLDIS0	871
THSSULDIS0	871
THSUDLOS	871
THSUDLOS0	872
THSUDLOSA	872
THSUDLOSSUB	872
THSUDLOSSUBA	873
THTADIS0	873
THTCONGS	873
THTCONSUB	874
THTHARDCONGS	874
THTHARDCONSUB	874
THTRALACC	875
THTRALACC_SUM	875
THTRALACC0	875
THTRALSUB	875
THV1CALLS	876
THV1CALLSSUB	876
THV1CONGSAS	876
THV1CONGSASSUB	877
THV1CONGSHO	877
THV1CONGSHOSUB	877
THV1FER	878
THV1FERTF	878
THV1NSCAN	878
THV1TCONGS	879
THV1TCONSUB	879
THV1TRALACC	879
THV1TRALACC_SUM	879
THV1TRALSUB	880
THV2CALLS	880
THV2CALLSSUB	880
THV2CONGSAS	881
THV2CONGSASSUB	881
THV2CONGSHO	881
THV2CONGSHOSUB	882

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

THV2NSCAN	882
THV2TCONGS	882
THV2TCONSUB	883
THV2TRALACC	883
THV2TRALSUB	883
THV3CALLS	884
THV3CALLSSUB	884
THV3CM1DL	884
THV3CM1UL	885
THV3CM2DL	885
THV3CM2UL	885
THV3CM3DL	886
THV3CM3UL	886
THV3CM4DL	886
THV3CM4UL	886
THV3CONGSAS	887
THV3CONGSASSUB	887
THV3CONGSHO	887
THV3CONGSHOSUB	888
THV3FERCM1	888
THV3FERCM2	888
THV3FERCM3	889
THV3FERCM4	889
THV3NSCAN	889
THV3TCONGS	890
THV3TCONSUB	890
THV3TFCM1	890
THV3TFCM2	890
THV3TFCM3	891
THV3TFCM4	891
THV3TRALACC	891
THV3TRALSUB	892
TIME_CELLEVENT	892
TIMEHCSOUT	892
TNUHCNT	893
TNUCHSUB	893
TOTCLSTIME	893
TRAFF2BTBFSCAN	894
TRAFF2ETBFSCAN	894
TRAFF2GTBFSCAN	894
TRAFFDLGPRSSCAN	895
TRAFFGPRSSCAN	895
TRAFFULGPRSSCAN	895
TRAFGPRS2SCAN	896
TRAFGPRS3SCAN	896
TRASYNCCNT	896
TSMSDWN	897
TSMSUP	897
TSQ0ACCPT	897
TSQ0ACCPDLDL	897
TSQ0AFACCPT	898

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TSQ0AFACCPTDL	898
TSQ0AFBAD	898
TSQ0AFBADDL	899
TSQ0AFGOOD	899
TSQ0AFGOODDL	899
TSQ0AHACCPT	900
TSQ0AHACCPTDL	900
TSQ0AHBAD	900
TSQ0AHBADDL	901
TSQ0AHGOOD	901
TSQ0AHGOODDL	901
TSQ0BAD	902
TSQ0BADDL	902
TSQ0GOOD	902
TSQ0GOODDL	903
TSQIACCPT	903
TSQIACCPTAF	903
TSQIACCPTAFDL	904
TSQIACCPTAH	904
TSQIACCPTAHDL	904
TSQIACCPTDL	905
TSQIACCPTSUB	905
TSQIACCPTSUBAF	905
TSQIACCPTSUBAFDL	906
TSQIACCPTSUBAH	906
TSQIACCPTSUBAHDL	906
TSQIACCPTSUBDL	907
TSQIBAD	907
TSQIBADAF	907
TSQIBADAFDL	908
TSQIBADAH	908
TSQIBADAHDL	908
TSQIBADDL	909
TSQIBADSUB	909
TSQIBADSUBAF	909
TSQIBADSUBAFDL	910
TSQIBADSUBAH	910
TSQIBADSUBAHDL	910
TSQIBADSUBDL	911
TSQIGOOD	911
TSQIGOODAF	911
TSQIGOODAFDL	912
TSQIGOODAH	912
TSQIGOODAHDL	912
TSQIGOODDL	913
TSQIGOODSUB	913
TSQIGOODSUBAF	913
TSQIGOODSUBAFDL	914
TSQIGOODSUBAH	914
TSQIGOODSUBAHDL	914
TSQIGOODSUBDL	915

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ULACTBPDCH	915
ULACTEPDCH	915
ULACTGPDCH	916
ULACTTBFPBPDCH	916
ULACTTBFPPEPDCH	916
ULACTTBFPGPDCH	917
ULBGEGDATA	917
ULBGEGPFC	917
ULBGEGTHR	917
ULBGGDATA	918
ULBGGPFC	918
ULBGGTHR	918
ULBPDCH	919
ULEPDCH	919
ULGMMVOL	919
ULGPDCH	920
ULINTBGVOL	920
ULMSEGDATA	920
ULMSEGTHR	921
ULMSGDATA	921
ULMSGTHR	921
ULSAICVOL	922
ULTBFPBPDCH	922
ULTBFPPEPDCH	922
ULTBFPGPDCH	923
ULTHP1EGDATA	923
ULTHP1EGPFC	923
ULTHP1EGTHR	923
ULTHP1GDATA	924
ULTHP1GPFC	924
ULTHP1GTHR	924
ULTHP2EGDATA	925
ULTHP2EGPFC	925
ULTHP2EGTHR	925
ULTHP2GDATA	926
ULTHP2GPFC	926
ULTHP2GTHR	926
ULTHP3EGDATA	927
ULTHP3EGPFC	927
ULTHP3EGTHR	927
ULTHP3GDATA	927
ULTHP3GPFC	928
ULTHP3GTHR	928
USEDLRLBKS	928
USEDULRLBKS	929
VOL10STRACC	929
VOL120STRACC	929
VOL160STRACC	930
VOL20STRACC	930
VOL30STRACC	930
VOL40STRACC	931

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

VOL60STRACC	931
VOL80STRACC	931
VOLULSTRACC	932
WTHR10STRACC	932
WTHR120STRACC	932
WTHR160STRACC	933
WTHR20STRACC	933
WTHR30STRACC	933
WTHR40STRACC	934
WTHR60STRACC	934
WTHR80STRACC	934
Cellset Primitive Calculations	935
GRAPHmultiLineSeparator	935
MRR_RELEASE	935
NUMDAYS	935
NUMHOURS	935
Cellset Peg Counts	935
Cell_Set_Name	935
Creator	935
Day_setting	936
No_of_Cells	936
Period__1	936
Period__2	936
Period__3	936
Period__4	936
Result_Name	937
Result_Status	937
Start_Time	937
Stop_Time	937
Threshold	937
DataService_MSC Primitive Calculations	937
GRAPHmultiLineSeparator	937
NUMDAYS	938
NUMHOURS	938
DataService_MSC Peg Counts	938
NDATATOT	938
Destination Primitive Calculations	938
GRAPHmultiLineSeparator	938
INTERVALS	938
LocalName	938
NUMDAYS	939
NUMHOURS	939
VENDORTECH	939
Destination Peg Counts	939
BANS_TRART	939
MSC_RELEASE	939
NANSW_MBASTRAFTY	939
NCALLS_MBASTRAFTY	940
NCALLS_SSF	940
NCALLS_TRART	940

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NCALLSDB	941
NCALLSEXTCONG	941
NCALLSINTCONG	941
NCALLSSUCCEOS	942
NCALLSUNSUC	942
NECONG_MBASTRAFTY	942
NICONG_MBASTRAFTY	943
NSCAN_MBASTRAFTY	943
NSUEOS_MBASTRAFTY	943
NTRALACC_MBASTRAFTY	944
NUNSUC	944
PERLEN	944
TRAFVLCNTR	944
TRAL_MBASTRAFTY	945
DestinationCode Primitive Calculations	945
GRAPHmultiLineSeparator	945
INTERVALS	945
NUMDAYS	945
NUMHOURS	945
VENDORTECH	946
DestinationCode Peg Counts	946
MSC_RELEASE	946
NANSW	946
NCALLS	946
NOUTGSCNT	946
NTDBLO	947
NUNSUC	947
PERLEN	947
TRAL	948
DigitalPath_MSC Primitive Calculations	948
GRAPHmultiLineSeparator	948
NUMDAYS	948
NUMHOURS	948
DigitalPath_MSC Peg Counts	948
BFF	948
CSLE	949
CSLER	949
DF	949
ES	949
ESR	949
FSBE	949
FSBER	949
G1	949
G1R	949
G2	949
G2R	949
G3	949
G3R	949
G4	950
G4R	950

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

G5	950
G5R	950
G6	950
G6R	950
LCVE	950
LCVER	950
SEFE	950
SEFER	950
SES	950
SESR	950
SF	950
SMI	951
UAS	951
UASB	951
UASR	951
UAV	951
DigPathType_BSC Primitive Calculations	951
GRAPHmultiLineSeparator	951
NUMDAYS	951
NUMHOURS	951
DigPathType_BSC Peg Counts	951
BLOHP	952
BLOLP	952
NBLOC	952
NBLOMS	952
NBLOSDIP	953
NCONHP	953
NCONLP	953
NCONMS	954
NCONSDIP	954
NDIPST	954
NPC	955
PERLEN	955
DigPathType_MSC Primitive Calculations	955
GRAPHmultiLineSeparator	955
NUMDAYS	955
NUMHOURS	955
DigPathType_MSC Peg Counts	956
NBLOC	956
NDIPST	956
DirTrunk Primitive Calculations	956
GRAPHmultiLineSeparator	956
INTERVALS	956
NANSWERSI_PC	956
NANSWERSO_PC	956
NCALLSI_PC	956
NCALLSO_PC	957
NISUPATPI_PC	957
NISUPATPO_PC	957
NOVERFLOWI_PC	957

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NOVERFLOWO_PC	957
NRESTRICTI_PC	957
NRESTRICTO_PC	957
NSEMIPERCI_PC	958
NSEMIPERCO_PC	958
NTRALACCI_TRUNKROUTE_PC	958
NTRALACCO_TRUNKROUTE_PC	958
NUMDAYS	958
NUMHOURS	958
TRALI_TRUNKROUTE_PC	958
TRALO_TRUNKROUTE_PC	959
VENDORTECH	959
DirTrunk Peg Counts	959
BBLOL	959
BLOL_TRUNKROUTE	959
ID1_TRUNKROUTE	960
ID2_TRUNKROUTE	960
LASTCONGCNT	960
MSC_RELEASE	961
NANSWERSI	961
NANSWERSO	961
NBBLOCACC	961
NBLOCACC_TRUNKROUTE	962
NC7DSEIZ	962
NCALLSI	962
NCALLSO	962
NCONGBAS	963
NCONGTRANS	963
NDEV_TRUNKROUTE	963
NDSEIZ	964
NISUPATPI	964
NISUPATPO	964
NOSEIZ_TRUNKROUTE	965
NOVERFLOWI	965
NOVERFLOWO	965
NRESTRICTI	966
NRESTRICTO	966
NSCAN_TRUNKROUTE	966
NSEMIPERCI	967
NSEMIPERCO	967
NTRALACCI_TRUNKROUTE	967
NTRALACCO_TRUNKROUTE	967
PERLEN	968
RESTRDEVcnt	968
THROUGHRTecnt	968
TRALI_TRUNKROUTE	968
TRALO_TRUNKROUTE	969
TRK_TYPE	969
Distrib_Group_Switch Primitive Calculations	969
GRAPHmultiLineSeparator	969
LocalName	970

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	970
NUMHOURS	970
Distrib_Group_Switch Peg Counts	970
ACCPLA	970
ACCPLB	970
ACCUNIT	971
BLKPLA	971
BLKPLB	971
BLKUNIT	972
NSCAN	972
NUNIT	972
PERLEN	973
DTISC Primitive Calculations	973
GRAPHmultiLineSeparator	973
INTERVALS	973
NUMDAYS	973
NUMHOURS	973
VENDORTECH	973
DTISC Peg Counts	974
MSC_RELEASE	974
NDTICMMFLT	974
NDTICMMTOT	974
NDTICNGTOT	974
NDTIDDDCTOT	975
NDTIESTFLT	975
NDTIESTTOT	975
NDTIICMCANTOT	976
NDTIICMCPLFLT	976
NDTIICMCPLTOT	976
NDTIICMFLT	977
NDTIICMTOT	977
NDTIPREPFLT	977
NDTIPREPTOT	978
NDTIRELTOT	978
NIWUANMFLT	978
NIWUANMTOT	979
NIWUCMMFLT	979
NIWUCMMTOT	979
NIWUCNGTOT	980
NIWUICMCANTOT	980
NIWUICMCPLFLT	980
NIWUICMCPLTOT	981
NIWUICMFLT	981
NIWUICMTOT	981
NIWUIWRFLT	982
NIWUIWRTOT	982
NIWURELTOT	982
PERLEN	982
ECPool Primitive Calculations	983
GRAPHmultiLineSeparator	983

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

INTERVALS	983
NUMDAYS	983
NUMHOURS	983
VENDORTECH	983
ECPool Peg Counts	983
ABLOCCNT	983
BLOCCNT	984
CALLCNT	984
CONGCNT	984
MBLOCCNT	985
MSC_RELEASE	985
NUDEVCNT	985
OBLOCCNT	985
PERLEN	986
POOL_ID	986
TOTDEVCNT	986
TRALCNT	986
EM Primitive Calculations	987
GRAPHmultiLineSeparator	987
INTERVALS	987
LocalName	987
NUMDAYS	987
NUMHOURS	987
VENDORTECH	988
EM Peg Counts	988
BSS_RELEASE	988
ID1_EM	988
PERLEN	988
RPPLOAD	988
EOSCode Primitive Calculations	989
GRAPHmultiLineSeparator	989
INTERVALS	989
LocalName	989
NUMDAYS	989
NUMHOURS	989
VENDORTECH	989
EOSCode Peg Counts	990
MSC_RELEASE	990
NEVERY	990
NLAST	990
PERLEN	990
Global_Titl_Trans_Typ Primitive Calculations	990
GRAPHmultiLineSeparator	991
NUMDAYS	991
NUMHOURS	991
Global_Titl_Trans_Typ Peg Counts	991
GTTPERFD	991
GTTUN0NS	991
GTTUN1NT	992
PERLEN	992

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Higher_Order_Path Primitive Calculations	992
GRAPHmultiLineSeparator	992
LocalName	992
NUMDAYS	992
NUMHOURS	993
Higher_Order_Path Peg Counts	993
HPFBBE	993
HPFES	993
HPFSES	993
HPFUAS	994
HPFUAV	994
HPNBBE	994
HPNES	995
HPNSES	995
HPNUAS	995
HPNUAV	996
PERLEN	996
SMI	996
HLRSubs Primitive Calculations	996
GRAPHmultiLineSeparator	996
INTERVALS	997
LocalName	997
NUMDAYS	997
NUMHOURS	997
VENDORTECH	997
HLRSubs Peg Counts	997
MSC_RELEASE	997
NHLRMSST	998
NHLRREGAST	998
PERLEN	998
ISDNESG Primitive Calculations	998
GRAPHmultiLineSeparator	998
INTERVALS	998
LocalName	999
NUMDAYS	999
NUMHOURS	999
VENDORTECH	999
ISDNESG Peg Counts	999
BSUBCNT	999
MSC_RELEASE	1000
NSCAN	1000
OSEIZCNT	1000
OTRalcNT	1000
PERLEN	1001
SUBCNT	1001
TANSCNT	1001
TBUSYCNt	1001
TCALLCNT	1002
TNUMLCNT	1002
TRSERCNT	1002

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TSEIZCNT	1003
TTRALCNT	1003
TUCACNT	1003
TUSBUCNT	1003
LA Primitive Calculations	1004
GRAPHmultiLineSeparator	1004
INTERVALS	1004
NUMDAYS	1004
NUMHOURS	1004
PL_SUCC%	1004
PL_TOT_1	1005
VENDORTECH	1005
LA Peg Counts	1005
MSC_RELEASE	1005
NLAL2IOTOT	1005
NLAL2NOSUCC	1005
NLAL2OISUCC	1006
NLAL2ONTOT	1006
NLALIOSUCC	1006
NLALIOTOT	1007
NLALNNSUCC	1007
NLALNNTOT	1007
NLALNOSUCC	1008
NLALNOTOT	1008
NLALOCPRRFLT	1008
NLALOCSSRFLT	1009
NLALOCSUCC	1009
NLALOCTOT	1009
NLALPESUCC	1010
NLALPETOT	1010
NLAPAG1LOTOT	1010
NLAPAG1RESUCC	1011
NLAPAG2LOTOT	1011
NLAPAG2RESUCC	1011
NLAPAGERR	1012
PERLEN	1012
LAPD Primitive Calculations	1012
GRAPHmultiLineSeparator	1012
INTERVALS	1012
LocalName	1012
NUMDAYS	1012
NUMHOURS	1013
VENDORTECH	1013
LAPD Peg Counts	1013
BSS_RELEASE	1013
CBADFRAME	1013
CLINKFAIL	1013
COVERLOAD	1014
CPROCOLERR	1014
CRECIFFRAME	1014

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CRETRANSM	1015
CTRIFRAME	1015
PERLEN	1015
LATA Primitive Calculations	1015
GRAPHmultiLineSeparator	1015
NUMDAYS	1016
NUMHOURS	1016
LATA Peg Counts	1016
NLTPG1SUCC	1016
NLTPG1TOT	1016
NLTPG2SUCC	1016
NLTPG2TOT	1016
NLTWPGSUCC	1016
NLTWPGTOT	1016
LossRoute Primitive Calculations	1016
GRAPHmultiLineSeparator	1017
INTERVALS	1017
NUMDAYS	1017
NUMHOURS	1017
VENDORTECH	1017
LossRoute Peg Counts	1017
ABLOL_LOSSROUTE	1017
BLOL_LOSSROUTE	1018
ID1_LOSSROUTE	1018
MBLOL_LOSSROUTE	1018
MSC_RELEASE	1019
NABLOCACC_LOSSROUTE	1019
NANSW_LOSSROUTE	1019
NBLOCACC_LOSSROUTE	1019
NCALLS	1020
NDEV_LOSSROUTE	1020
NMBLOCACC_LOSSROUTE	1020
NOBLOCACC_LOSSROUTE	1021
NOVERFLOW_LOSSROUTE	1021
NSCAN_LOSSROUTE	1021
NTRALACC_LOSSROUTE	1021
OBLOL_LOSSROUTE	1022
PERLEN	1022
TRAL_LOSSROUTE	1022
Lower_Order_Path Primitive Calculations	1023
GRAPHmultiLineSeparator	1023
LocalName	1023
NUMDAYS	1023
NUMHOURS	1023
Lower_Order_Path Peg Counts	1023
LPFBBE	1023
LPFES	1024
LPFSES	1024
LPFUAS	1024
LPFUAV	1025

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

LPNBBE	1025
LPNES	1025
LPNSES	1025
LPNUAS	1026
LPNUAV	1026
PERLEN	1026
SMI	1027
MapOp Primitive Calculations	1027
GRAPHmultiLineSeparator	1027
INTERVALS	1027
NUMDAYS	1027
NUMHOURS	1027
VENDORTECH	1028
MapOp Peg Counts	1028
MSC_RELEASE	1028
NMAP1FLT	1028
NMAP1SUCC	1028
NMAP1TOT	1029
NMAP1TOTST	1029
NMAP2FLT	1029
NMAP2SUCC	1030
NMAP2TOT	1030
NMAP3FLT	1030
NMAP3SUCC	1031
NMAP3TOT	1031
PERLEN	1031
MSC Available Data Fields	1031
C7TMFILE_MSC_AvailableDataPct	1031
STS_MSC_AvailableDataPct	1031
MSC Primitive Calculations	1032
AnsSwitchCallsFiltered	1032
CP_LOAD%	1032
FailedIncomingInterMSCHandoverattempts	1032
FailedInterCellIntraMSCHandovers	1032
FailedOutgoingInterMSCHandoverAttempts	1032
FailSwitchCallsFiltered	1032
GRAPHmultiLineSeparator	1033
IncominterMSCHandoverattempts	1033
IntBSCIncHOAtts	1033
IntBSCIncHOFail%	1033
IntBSCIncHOFails	1033
INTERVALS	1033
INTERVALS_TRAR	1033
INTERVALS_TRART	1034
IntMSCIncHOAtts	1034
IntMSCIncHOFail%	1034
IntMSCIncHOFails	1034
IntMSCOutHOAtts	1034
IntMSCOutHOFail%	1034
IntMSCOutHOFails	1034

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

LU_IMSI_AT	1035
LU_IMSI_DE	1035
LU_NORM	1035
LU_NR	1035
LU_NR_SUC	1035
LU_PERIOD	1035
LU_R	1036
LU_R_SUC	1036
LU_SUC	1036
LU_TOT	1036
MobileTerminatingFailedCalls	1036
MobilOriginatingFailedCalls	1036
MocMtcSetupSuccessRate	1036
MocMtcSetupSuccessRate_UMTS	1037
MocMtcSetupSuccessRateUMTS	1037
MocSetupRatio	1037
MocSetupRatio_UMTS	1037
MocSetupRatioUMTS	1037
MocSetupSuccessRate	1037
MocSetupSuccessRate_UMTS	1037
MocSetupSuccessRateUMTS	1038
MtcSetupRatio	1038
MtcSetupRatio_UMTS	1038
MtcSetupRatioUMTS	1038
MtcSetupSuccessRate	1038
MtcSetupSuccessRate_UMTS	1038
MtcSetupSuccessRateUMTS	1038
NANSWERS_BW	1039
NCALLS_BW	1039
NHLRMSST_AVG	1039
NHLRMSST_MAX	1039
NISUPATP_BW	1039
NOVERFLOW_BW	1039
NRESTRICT_BW	1039
NSEMIPERC_BW	1040
NTRALACC_TRUNKROUTE_BW	1040
NUMDAYS	1040
NUMHOURS	1040
OutgoingInterMSCHandoverAttempts	1040
PercAnsSwitchCallsFiltered	1040
PercFailCallsFiltered	1040
PercFailSwitchCallsFiltered	1041
SMS_MO_SUC	1041
SMS_MOSENT	1041
SMS_MT_SUC	1041
SMS_MTSENT	1041
SMS_Successful	1041
SRNCDroppedCallRate	1042
SRNCRelocationSuccessRate	1042
SRNCRelocSucSigChanRate	1042
SRNCSwitchBackRate	1042

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SuccessfulInterCellIntraMSCHandovers	1042
SwitchCallsFiltered	1042
SwitchedAttmpFiltered	1042
SwitchTraffFiltered	1043
TotalGlobalPages	1043
TotalInterSwitchTraffic	1043
TotalLADirectedPages	1043
TotalPOITraffic	1043
TotalSwitchedTraffic	1043
TRAL_TRUNKROUTE_BW	1043
VENDORTECH	1044
MSC Peg Counts	1044
ABLOL_MSC	1044
ACCBLKCNTNTR	1044
ACCLOAD	1044
ACCTRAFCNTNTR	1045
BLOLCML	1045
BLOLEMUX	1045
BLOLEMUXA	1046
BLOLEMUXB	1046
BLOLSPM	1046
BLOLSPMA	1047
BLOLSPMB	1047
BLOLTSM	1047
BLOLTSM A	1048
BLOLTSM B	1048
CALLATT	1048
CALLCNG	1048
CALLCNTI	1049
CALLNPPI	1049
CALLTRF	1049
CDIALABORTSSF_SESSSF	1050
CDIALABORTSSF_SHAM	1050
CDIALATTFAIL_SESSSF	1050
CDIALATTFAIL_SHAM	1051
CDIALINITATT_SESSSF	1051
CDIALINITATT_SHAM	1051
CDIALINITCONG_SESSSF	1051
CDIALINITCONG_SHAM	1052
CDIALINPROG_SESSSF	1052
CDIALINPROG_SHAM	1052
CDIALPROCESSED_SESSSF	1053
CDIALPROCESSED_SHAM	1053
CDIALREJT CAP_SESSSF	1053
CDIALREJT CAP_SHAM	1054
CDIALREMABORT_SESSSF	1054
CDIALREMABORT_SHAM	1054
CDIALSCFERRREJ_SESSSF	1055
CDIALSCFERRREJ_SHAM	1055
CDIALTIMEOUT	1055
CERRREJSEND_SESSSF	1055

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CERRREJSEND_SHAM	1056
CGREQ	1056
CHASMSSUCC	1056
CHASMSTOT	1057
CLREQ	1057
COMPCLI	1057
COMPCLO	1058
CONNSECT	1058
CONNSECT_SS7SCCPUSE	1058
CREFREC	1059
CREFSENT	1059
CRREC	1059
CRSENT	1060
CSENDREQREJ_SESSSF	1060
CSENDREQREJ_SHAM	1060
CTMACTMSD	1061
CTMAMSSUP	1061
CTMANCTMSD	1061
CTMIUCTMSD	1062
CTMIUMSSUP	1062
CTMIUNCTMSD	1062
DIAATT	1063
DIACNG	1063
DIATRF	1063
DMSU	1064
DSIF	1064
ERRREC	1064
ERRSENT	1064
ETCATT	1065
ETCCNG	1065
ETCTRF	1065
GINVOKED	1066
HNDSYNER	1066
IMSU	1066
ISIF	1067
LUDTREC	1067
LUDTSENT	1067
LUDTSREC	1068
LUDTSSSENT	1068
MSC_RELEASE	1068
MSGHAND	1068
MSGPOL	1069
MSGPOLREJ	1069
MSGRCL0	1069
MSGRCL1	1070
MSGRQGT	1070
MSGSCL0	1070
MSGSCL1	1070
MSINVDPC	1071
MSINVSIO	1071
MTNSEPPCALL	1071

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MTNSEPPFREL	1072
NACCBLOT	1072
NACTINDIC	1072
NALERT	1073
NAUTDISCLDC	1073
NAUTFTCSUCC	1073
NAUTFTCTOT	1074
NAUTMACFAIL	1074
NAUTPPREJ	1074
NAUTPPREP	1074
NAUTPPREQ	1075
NAUTREAFLT	1075
NAUTREATOT	1075
NAUTREQSUCC	1076
NAUTREQTOT	1076
NAUTRESYNCH	1076
NAUTSREERR	1077
NAUTTMSIERR	1077
NAUTTMSISUCC	1077
NAUTTMSITOT	1078
NAUTUSETOT	1078
NBLOCLMACC	1078
NBLOEMUXAACC	1078
NBLOEMUXACC	1079
NBLOEMUXBACC	1079
NBLOL	1079
NBLOSPMAACC	1080
NBLOSPMACC	1080
NBLOSPMBACC	1080
NBLOTSMAACC	1081
NBLOTSMACC	1081
NBLOTSMBACC	1081
NCACOLDG	1082
NCANOSUBD	1082
NCAPREJCNT	1082
NCAPREQCNT	1082
NCELHUNNSUCC	1083
NCELHUNNTOT	1083
NCELHUNSUCC	1083
NCELHUNTOT	1084
NCHAFRMSUCC	1084
NCHAFRMTOT	1084
NCHATOMSUCC	1085
NCHATOMTOT	1085
NCIPATTTOT	1085
NCIPHREJ	1086
NCIPHREQ	1086
NCIPSETSUCC	1086
NCLM	1086
NCPABLOT	1087
NCPMBLOT	1087

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NCTDCANCLOCDISC	1087
NCTDDISC	1088
NDETGPRS	1088
NDISCCLINKMGWT	1088
NDRPOVRD	1089
NDTAP1TOT	1089
NDTAPAGPS	1089
NDTAPEOTD	1090
NDTAPEXTOT	1090
NDTAPMSTOT	1090
NDTAPSTOT	1090
NEMUX	1091
NEQIDBLKTOT	1091
NEQIDEIRTOT	1091
NEQIDGRYTOT	1092
NEQIDMSSUCC	1092
NEQIDTOT	1092
NEQIDUNKTOT	1093
NEQIDWHITOT	1093
NERPROT	1093
NERRCV	1094
NERRUNEXD	1094
NERSUNEXD	1094
NFENSUP	1094
NFORLAPT	1095
NFORLAPZ	1095
NFORLMAN	1095
NFTDIEX	1096
NFTDMHI	1096
NFTDMLO	1096
NFTDNPRI0	1097
NFTDORG	1097
NFTDPRI0	1097
NFTDTCAP	1098
NGUHBSCRNCUCC	1098
NGUHBSCRNCTOT	1098
NGUHNDATTSUCC	1099
NGUHNDCMDTOT	1099
NGUHNDHRQDTOT	1099
NGUHNDRELRR	1100
NGUHNDSDSUCC	1100
NGUHNDSDTOT	1100
NGUHNDSHTSUCC	1100
NGUHNDSHTTOT	1101
NGURELCGSSUCC	1101
NGURELDGSSUCC	1101
NGURELREQSUCC	1102
NGURELREQTOT	1102
NHNDATTSUCC	1102
NHNCDBSSSUCC	1103
NHNCDBSSTOT	1103

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NHNDGSSUCC	1103
NHNDCMDTOT	1104
NHNDGSSUCC	1104
NHNDEBSSUCC	1104
NHNDEBSTOT	1104
NHNDESHSUCC	1105
NHNDESHTOT	1105
NHNDESTSUCC	1105
NHNDESTTOT	1106
NHNDIBSSUCC	1106
NHNDRELERR	1106
NHNDREQSUCC	1107
NHNDREQTOT	1107
NHNDRQDTOT	1107
NHNDSDHSUCC	1108
NHNDSDHTOT	1108
NHNDSHTSUCC	1108
NHNDSHTTOT	1109
NHNDTGSSUCC	1109
NHWFAULTS	1109
NINC	1109
NINCASSG	1110
NINCTERM	1110
NIRNFRMSUCC	1110
NIRNFRMTOT	1111
NIRNTOSUCC	1111
NIRNTOTOT	1111
NL3CCONF	1112
NL3CPROC	1112
NLDC	1112
NLIM2OLDSUCC	1113
NLNOLDSUCC	1113
NLNOLDTOT	1113
NLNPQFAIL	1114
NLNPQPORT	1114
NLNPQTOT	1114
NLOCATT2TOT	1114
NLOCATTTOT	1115
NLOCCONGSUCC	1115
NLOCDET2TOT	1115
NLOCDETTOT	1116
NLOCGPRSSUCC	1116
NLOCGPRSTOT	1116
NLOCIDTTOT	1117
NLOCIMS2ERR	1117
NLOCIMSERR	1117
NLOCNRG2SUCC	1118
NLOCNRG2TOT	1118
NLOCNRGSUCC	1118
NLOCNRGTOT	1119
NLOCNRRTOT	1119

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NLOCOLD2SUCC	1119
NLOCOLD2TOT	1120
NLOCOLDSUCC	1120
NLOCOLDTOT	1120
NLOCPERTOT	1121
NLOCPUNEWCON	1121
NLOCPUOLDCON	1121
NLOCPUTOTNEW	1122
NLOCREGSERR	1122
NLOCUPDSUCC	1122
NLOLDIMSUCC	1123
NLOSTCL	1123
NLOSTRE	1123
NLPERSUCC	1124
NLRGA	1124
NLRGM	1124
NLTMISTOT	1124
NMANDISCLDC	1125
NMAPVERR	1125
NMAUABLOT	1125
NMAUF	1126
NMAUMBLOT	1126
NMMGMSUCC	1126
NMMGSMTOT	1127
NMMUMTSSUCC	1127
NMMUMTSTOT	1127
NMMWPS	1128
NMSCLOCACQSUCC	1128
NMSCLOCACQTOT	1128
NMSCP3LOCTOT	1128
NMSCP4LOCSUCC	1129
NMSCP5LOCEOTD	1129
NMSCP6LOCAGPS	1129
NMSCP7LOCTIMADV	1130
NMSCP8LOCUTDOA	1130
NMSFRMSCCI	1130
NMSFRMTOTI	1131
NMSINFOREQ	1131
NMSINFORESP	1131
NMSP6LOCAGPS	1132
NMSTOMSCCO	1132
NMSTOMTOTO	1132
NMSUNREACHGPRS	1133
NNOCKT	1133
NNOPRTY	1133
NNOREC	1134
NOCOMPI	1134
NOCOMPO	1134
NODBCCTOT	1135
NODBCIPTOT	1135
NODBCP1TOT	1135

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NODBCP2TOT	1135
NODBSMTOT	1136
NOFFIEX	1136
NOFFMHI	1136
NOFFMLO	1137
NOFFNPRIO_MSC_LOAS	1137
NOFFORG	1137
NOFFPRIO_MSC_LOAS	1138
NOFFTCAP	1138
NORISMSUCC	1138
NORISMTOT	1139
NOUTGO	1139
NOUTIXC	1139
NOUTIXNC	1140
NPAG1GLTOT	1140
NPAG1GLUTOT	1140
NPAG1GPRSSUCC	1141
NPAG1GPRSTOT	1141
NPAG1LOTOT	1141
NPAG1LOUTOT	1142
NPAG1RESUCC	1142
NPAG1REUSUCC	1142
NPAG2GLTOT	1143
NPAG2GLUTOT	1143
NPAG2GPRSSUCC	1143
NPAG2GPRSTOT	1143
NPAG2LOTOT	1144
NPAG2LOUTOT	1144
NPAG2RESUCC	1144
NPAG2REUSUCC	1145
NPAGAREIU	1145
NPAGERR	1145
NPAGGPRSFAIL	1146
NPAGIUREA	1146
NPAGSMSRES	1146
NPAGSMSTOT	1147
NPAGUERR	1147
NPBITF	1147
NPCPF	1148
NPERMF	1148
NQUERR	1148
NQUIREQSV	1149
NREGNOTRSUCC	1149
NRELA	1149
NRELATTSUCC	1149
NRELCGSSUCC	1150
NRELCMDTOT	1150
NRELDGSSUCC	1150
NRELM	1151
NRELRELERR	1151
NRELREQSUCC	1151

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NRELREQTOT	1152
NRELRNCSUCC	1152
NRELRNCTOT	1152
NRELQDRTOT	1153
NRELSDHSUCC	1153
NRELSDHTOT	1153
NREQTERM	1153
NRESETRECEIVED	1154
NRESETSENT	1154
NRNTRLRCTOT	1154
NRNTRLRDRTOT	1155
NRNTRLRDSUCC	1155
NRNTRLRSUCC	1155
NRP	1156
NRSITAATOT	1156
NRSITARTOT	1156
NRSOCLOERR	1157
NRSOCLOTOT	1157
NRSOCTATOT	1157
NRSPNRCV	1158
NRSPROUT	1158
NRSTCLOERR	1158
NRSTCLOTOT	1159
NRSTCTATOT	1159
NSCAN	1159
NSCAN_GRP SWITCH	1159
NSECFRRNSCC	1160
NSECTORNTOT	1160
NSEPINCTER	1160
NSEPIUSC	1161
NSEPIUNS	1161
NSEPOUT	1161
NSEPPCALL	1161
NSEPPFREL	1162
NSEPPTOUT	1162
NSEPQCALL	1162
NSEPQFREL	1163
NSEPQOVFL	1163
NSEPQTOUT	1163
NSEPSUCSIG	1163
NSEPUNSUCC	1164
NSMLA	1164
NSMLM	1164
NSMSCAOSUCC	1165
NSMSCDOTOT	1165
NSMSCMRSUCC	1165
NSMSCMTOT	1166
NSMSDBRS	1166
NSMSFAIL	1166
NSMSINV	1167
NSMSMARTOT	1167

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NSMSNRFSMTOT	1167
NSMSNRFSMTOT3	1168
NSMSRAOSUCC	1168
NSMSRDOTOT	1168
NSMSRDTOT2	1169
NSMSSMRLTOT	1169
NSMSSRSUCC	1169
NSPFAXSW1SUCC	1170
NSPFAXSW1TOT	1170
NSPM	1170
NSUCCLIWFBYPASS	1170
NTATTMPT	1171
NTBITF	1171
NTBRSMS	1171
NTBRSMSFAIL	1172
NTCISTALG	1172
NTCISTALM	1172
NTCISTCOM	1173
NTCPF	1173
NTEMPF	1173
NTERM	1173
NTERSMSUCC	1174
NTERSMTOT	1174
NTOTLIWFBYPASS	1174
NTQABAND	1175
NTQOVFL	1175
NTQQEUD	1175
NTQTOUT	1176
NTRMER	1176
NTRMERAB	1176
NTRMERSSP	1177
NTRMNRCV	1177
NTRMRCV	1177
NTSM	1178
NUGHNDATTSUCC	1178
NUGHNDCGSSUCC	1178
NUGHNDCMDTOT	1179
NUGHNDDGSSUCC	1179
NUGHNDRELERR	1179
NUGHNDRELREQSUCC	1179
NUGHNDRELREQTOT	1180
NUGHNDRRQDTOT	1180
NUGHNDSDSUCC	1180
NUGHNDSDTOT	1181
NUGHNDSTSUCC	1181
NUGHNDSTTOT	1181
NUGHRNCBSCSUCC	1182
NUGHRNCBSCTOT	1182
NVACANN	1182
OCTRETRN	1183
OMMSU	1183

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

OMSIF	1183
ORGETSTOT	1183
ORWPSSUCC	1184
ORWPSTOT	1184
OUMSU	1184
OUSIF	1184
P95FPHGT	1185
P95FPHNT	1185
PAIRABLOL	1185
PAIRABLOL1	1186
PAIRMBLOL	1186
PAIRMBLOL1	1186
PERLEN	1187
PERLEN_TRAR	1187
PERLEN_TRART	1187
RFNETCONG	1187
RFNETFAIL	1187
RFSPADDR	1187
RFSSNFAIL	1188
RFSUADDR	1188
RFUNEQUIP	1188
RFUNQUAL	1189
SAMPPHGT	1189
SAMPPHNT	1189
SCANCNTBLO	1190
SCANCNTTRAFF	1190
SFREQ	1190
SIZEDS	1191
SIZEPS	1191
SIZERS	1191
SRFATT	1192
SRFCNG	1192
SRFTRF	1192
SYERROR	1193
TIMEETC	1193
TIMEPHGT	1193
TIMEPHNT	1193
TIMESRF	1194
TMMSU	1194
TMSIF	1194
TNSEPSUCC	1195
TNSEPTOT	1195
TOTSCBUF1	1195
TOTSCBUF2	1195
TOTSCBUF3	1196
TOTSCBUF4	1196
TOTTCBUFF	1196
TOTTCDIA	1197
TOTTCOP	1197
TUMSU	1197
TUSIF	1198

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

UDTREC	1198
UDTSENT	1198
UDTSREC	1199
UDTSSSENT	1199
WASSIGND	1199
WINVOKED	1199
XUDTREC	1200
XUDTSENT	1200
XUDTSREC	1200
XUDTSSSENT	1201
MSC_SS7Dest Primitive Calculations	1201
GRAPHmultiLineSeparator	1201
INTERVALS	1201
LocalName	1201
NUMDAYS	1202
NUMHOURS	1202
VENDORTECH	1202
MSC_SS7Dest Peg Counts	1202
MSC_RELEASE	1202
MSGSEND	1202
PERLEN	1202
SYS7IND_MSC_C7SCSIGP	1203
MSC_SS7HSLPrmGrp Primitive Calculations	1203
GRAPHmultiLineSeparator	1203
LocalName	1203
NUMDAYS	1203
NUMHOURS	1203
VENDORTECH	1204
MSC_SS7HSLPrmGrp Peg Counts	1204
AERMM	1204
AERMN	1204
AERMTIE	1204
AERMTIN	1205
ALPHA	1205
CNGABTH1	1205
CNGABTH2	1206
CNGABTH3	1206
CNGDITH1	1206
CNGDITH2	1207
CNGDITH3	1207
CNGONTH1	1207
CNGONTH2	1208
CNGONTH3	1208
ERRCORR	1208
HLR_RELEASE	1209
LT1ALNRD	1209
LT1UNACK	1209
LT2NOALN	1209
LT3ALIND	1210
LT4EMGPV	1210

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

LT4NMLPV	1210
LT5DSIB	1211
LT6RMCNG	1211
LT7XDLAK	1211
LTBLCKSZ	1212
LTFORPRV	1212
LTKPALIV	1212
LTMAXPDU	1213
LTMXIDLE	1213
LTNOCRED	1213
LTPRVPDU	1214
LTPULLRT	1214
LTSCCFAL	1214
LTSCCOPR	1214
LTSETALG	1215
LTSTATLS	1215
LTTAUERR	1215
MONEREVT	1216
MONINTER	1216
NMXSDPDU	1216
NMXSTPDU	1217
NMXUNACK	1217
NT17REAL	1217
PCRN2	1218
PDUSENTP	1218
PERLEN	1218
SCCOPPDPU	1218
SUERMD	1219
SUERMT	1219
TAS	1219
THRSRUNQ	1220
TTS	1220
MSC_SS7Link Primitive Calculations	1220
C7_SLTL_DiffRX	1220
C7_SLTL_DiffTX	1221
C7_SLTL_RX	1221
C7_SLTL_TX	1221
DataRate	1221
GRAPHmultiLineSeparator	1221
InterconnectTraffReciev	1221
InterconnectTraffTrans	1222
INTERVALS	1222
INTERVALS_C7TM	1222
Link_Usage	1222
MSUS	1222
NMSURE	1222
NMSUTR	1222
NumberMSUsReceived	1223
NumberMSUsTransmitted	1223
NumberSIFAndSIOOctetsReceived	1223
NumberSIFAndSIOOctetsTransmitted	1223

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NumberSLFailures	1223
NUMDAYS	1223
NUMHOURS	1223
PercentageLinkAvailability	1224
PercentageLocalBusy	1224
VENDORTECH	1224
MSC_SS7Link Peg Counts	1224
ACHGOVRS	1224
ACHGOVRS_SS7HSLMT2	1224
ALGNFLRS_SS7HSLMT2	1225
ASLDUR	1225
CDISCONX_SS7HSLMT3	1225
CGSTEVL_SS7HSLMT1	1226
CGSTLEVL	1226
CGSTSTAT	1226
CGSTSTAT_SS7HSLMT1	1227
CHOVERS	1227
CLUSTERCODE_MSC_SS7SLMT1	1227
CLUSTERCODE_MSC_SS7SLMT2	1228
CLUSTERCODE_MSC_SS7SLTRAFF	1228
CNRECONX_SS7HSLMT3	1228
CNSUMERS_SS7HSLMT3	1228
CONCNT1	1229
CONCNT2	1229
CONCNT3	1229
CONDUR1	1230
CONDUR2	1230
CONDUR3	1230
CONSTOP1	1231
CONSTOP2	1231
CONSTOP3	1231
DCLRFAIL	1232
DCLRFAIL_SS7HSLMT1	1232
DCONG	1232
DDCFLABN	1232
DDCFLHWP	1233
DDCFLHWP_SS7HSLMT2	1233
DDCFLXDA	1233
DDCFLXDA_SS7HSLMT2	1234
DDCFLXDC	1234
DDCFLXDC_SS7HSLMT2	1234
DDCFLXER	1235
DDCFLXER_SS7HSLMT2	1235
DISMES1	1235
DISMES2	1236
DISMES3	1236
DISMSU1	1236
DISMSU2	1237
DISMSU3	1237
DRBSYDCL	1237
DRBSYDCL_SS7HSLMT1	1237

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

DRBSYRCD	1238
DRDCLFLR	1238
DRDCLFLR_SS7HSLMT2	1238
DRFEPRO	1239
DRFEPRO_SS7HSLMT1	1239
DRLCLPRO	1239
DRLCLPRO_SS7HSLMT2	1240
DRLKFAIL	1240
DRLKINHB	1240
DRLKINHB_SS7HSLMT2	1241
DRNOCRED_SS7HSLMT3	1241
DUNAV	1241
ECCNGLV1	1241
ECCNGLV1_SS7HSLMT1	1242
ECCNGLV2	1242
ECCNGLV2_SS7HSLMT1	1242
ECCNGLV3	1243
ECCNGLV3_SS7HSLMT1	1243
ERRSEC	1243
ERRSEC_SS7HSLTRAF	1244
FARMGINH	1244
FARMGINH_SS7HSLMT2	1244
HDRDSCDS_SS7HSLMT3	1245
HECDSCDS_SS7HSLMT3	1245
ICUICELS_SS7HSLTRAF	1245
ILS_MSC_SS7SLMT1	1245
ILS_MSC_SS7SLTRAFF	1246
INCCELLS_SS7HSLTRAF	1246
INITFLRS_SS7HSLMT3	1246
INVLPDUS_SS7HSLMT3	1247
LACKCRED_SS7HSLMT3	1247
LBUSDUR	1247
LINHNO	1248
LKMT CST	1248
LKMT CST_SS7HSLMT1	1248
LOCINHDUR	1249
LOFMSU1	1249
LOFMSU2	1249
LOFMSU3	1250
LS10SCAN	1250
LS10SCAN_SS7HSLMT2	1250
LSID	1250
MCHGOVRS	1251
MCHGOVRS_SS7HSLMT2	1251
MEMBERCODE_MSC_SS7SLMT1	1251
MEMBERCODE_MSC_SS7SLMT2	1252
MEMBERCODE_MSC_SS7SLTRAFF	1252
MGMTINHB	1252
MGMTINHB_SS7HSLMT1	1253
MOCTRGTT_SS7HSLTRAF	1253
MSC_RELEASE	1253

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MSGDISC0_SS7HSLMT1	1253
MSGDISC1_SS7HSLMT1	1254
MSGDISC2_SS7HSLMT1	1254
MSGDISC3_SS7HSLMT1	1254
MSGDISCH_SS7HSLMT1	1255
MSGSRCVD_SS7HSLTRAF	1255
MSGSRGTT_SS7HSLTRAF	1255
MSGSTRAN_SS7HSLTRAF	1255
MSUDISC0	1256
MSUDISC1	1256
MSUDISC2	1256
MSUDISC3	1257
MSURCERR	1257
MSURECD_MSC_C7Link	1257
MSURETRN_MSC_C7Link	1258
MSUSRGTT	1258
MSUTRAN_MSC_C7Link	1258
MTCEUSG	1259
MTCEUSG_SS7HSLMT1	1259
N10SCAN_MSC_C7Link	1259
N10SCAN_SS7HSLMT1	1259
NDCFLABN	1260
NDCFLHWP	1260
NDCFLHWP_SS7HSLMT2	1260
NDCFLXDA	1261
NDCFLXDA_SS7HSLMT2	1261
NDCFLXDC	1261
NDCFLXDC_SS7HSLMT2	1262
NDCFLXER	1262
NDCFLXER_SS7HSLMT2	1262
NDISC	1263
NEARMGIH	1263
NEARMGIH_SS7HSLMT2	1263
NEGACKS	1263
NLOSS	1264
NMDCLFLR	1264
NMDCLFLR_SS7HSLMT2	1264
NMSURE_ASC_CCITT7	1265
NMSURE_C7SL1	1265
NMSUTR_ASC_CCITT7	1265
NMSUTR_C7SL1	1266
NNAREC	1266
NOCTRE	1266
NOCTRTR	1267
NOCTTR	1267
NORTRO	1267
NSIFSRE	1267
NSIFTR	1268
NSLALPRFL	1268
NSLCO	1268
NSLFA	1269

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NSUERR	1269
OCDANMLS_SS7HSLMT3	1269
OCTRCGTT	1270
OGUICELS_SS7HSLTRAF	1270
OUTCELLS_SS7HSLTRAF	1270
PDULSTER_SS7HSLMT3	1271
PDUOCTRC_SS7HSLTRAF	1271
PDUOCTTR_SS7HSLTRAF	1271
PDUSRCVD_SS7HSLTRAF	1271
PDUSTRAN_SS7HSLTRAF	1272
PDUSUMER_SS7HSLMT3	1272
PERLEN	1272
PERLEN_C7TM	1273
PROSTAT	1273
PROTRAN	1273
RECVDOCT_MSC_C7Link	1273
RECVDOCT_SS7HSLTRAF	1274
REMINHDUR	1274
RETRNOCT_MSC_C7Link	1274
RINHNO	1274
SAALINSV_SS7HSLMT3	1275
SAMPCNT	1275
SAMPCNT_SS7HSLMT1	1275
SCANSEC_ASC_CCITT7	1276
SDOCTRCV_SS7HSLTRAF	1276
SDOCTRTR_SS7HSLTRAF	1276
SDOCTTRN_SS7HSLTRAF	1277
SDPDURCV_SS7HSLTRAF	1277
SDPDURRR_SS7HSLTRAF	1277
SDPDURTR_SS7HSLTRAF	1278
SDPDUTRN_SS7HSLTRAF	1278
SL10SCAN	1278
SL10SCAN_SS7HSLMT2	1279
SLPARMGP	1279
SLPARMGP_SS7HSLMT2	1279
SYS7IND_C7SL1	1279
SYS7IND_C7SL2	1280
TDCNGLV1	1280
TDCNGLV1_SS7HSLMT1	1280
TDCNGLV2	1281
TDCNGLV2_SS7HSLMT1	1281
TDCNGLV3	1281
TDCNGLV3_SS7HSLMT1	1282
THRACHOV	1282
THRMSUER	1282
THRNEGAK	1283
TLNKACTV	1283
TLNKACTV_SS7HSLMT1	1283
TOTOCMSG_SS7HSLMT1	1283
TOTOCMSU	1284
TOTOCOCT	1284

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TOTOCOCT_SS7HSLMT1	1284
TOTPRI00	1285
TOTPRI00_SS7HSLMT1	1285
TOTPRI01	1285
TOTPRI01_SS7HSLMT1	1286
TOTPRI02	1286
TOTPRI02_SS7HSLMT1	1286
TOTPRI03	1287
TOTPRI03_SS7HSLMT1	1287
TRANOCT_MSC_C7Link	1287
TRANOCT_SS7HSLTRAF	1287
UNAVAILDUR	1288
UNAVRBLDUR	1288
UNAVSLFDUR	1288
UNEXPDUS_SS7HSLMT3	1289
MSC_SS7LinkSet Primitive Calculations	1289
C7_LSTL_AvgRX	1289
C7_LSTL_AvgTX	1289
Critical_Carried	1289
DIMENSION	1290
GRAPHmultiLineSeparator	1290
GROWTH	1290
INTERVALS	1290
Link_Unavailable	1290
Link_Usage	1290
Links_Q	1290
Ln_Correlation	1291
Ln_Exhaust_Date	1291
Ln_Exhaust_Days	1291
MSUS	1291
Nominal_Capacity	1291
NSLFA	1291
NumberMSUsReceived	1291
NumberMSUsTransmitted	1292
NumberSLFailures	1292
NUMDAYS	1292
NUMHOURS	1292
NumLinks	1292
PercentageLinkAvailability	1292
PercentageLinksetInService	1293
RX_AvgLink	1293
RX_MSUS	1293
RX_Octets	1293
Sample_Size	1293
TX_AvgLink	1293
TX_MSUS	1293
TX_Octets	1294
VENDORTECH	1294
MSC_SS7LinkSet Peg Counts	1294
ASPADUR_MSC	1294
ASPINA_MSC	1294

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

AVLINKS	1295
AVLINKS_SS7HSLs	1295
CLUSTERCODE_MSC_SS7LS	1295
ICUICELs_SS7HSLs	1295
INCCELs_SS7HSLs	1296
LINKS	1296
LINKS_SS7HSLs	1296
LSMTCST	1297
LSMTCST_SS7HSLs	1297
MEMBERCODE_MSC_SS7LS	1297
MSC_RELEASE	1298
MSGSRCVD_SS7HSLs	1298
MSGSTRAN_SS7HSLs	1298
MSURECD	1298
MSURETRN	1299
MSUTRAN	1299
N10SCAN_MSC_C7LinkSet	1299
N10SCAN_SS7HSLs	1300
OGUICELs_SS7HSLs	1300
OOSLINKS	1300
OOSLINKS_SS7HSLs	1301
OUTCELLs_SS7HSLs	1301
PDUOCTRC_SS7HSLs	1301
PDUOCTTR_SS7HSLs	1301
PDUSRCVD_SS7HSLs	1302
PDUSTRAN_SS7HSLs	1302
PERLEN	1302
RECVD OCT	1302
RECVD OCT_SS7HSLs	1303
RETRNOCT	1303
SDOCTRCV_SS7HSLs	1303
SDOCTRTR_SS7HSLs	1304
SDOCTTRN_SS7HSLs	1304
SDPDURCV_SS7HSLs	1304
SDPDURTR_SS7HSLs	1305
SDPDUTRN_SS7HSLs	1305
STUNADURAT_MSC	1305
SYS7IND_MSC_C7ADJSLP	1306
SYS7IND_MSC_C7SLSET	1306
TDLSINAC	1306
TDLSINAC_SS7HSLs	1306
TRANOCT	1307
TRANOCT_SS7HSLs	1307
UAVLINKS	1307
UAVLINKS_SS7HSLs	1308
MSC_SS7RouteSet Primitive Calculations	1308
C7_RSAV_%	1308
GRAPHmultiLineSeparator	1308
INTERVALS	1308
NUMDAYS	1309
NUMHOURS	1309

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

VENDORTECH	1309
MSC_SS7RouteSet Peg Counts	1309
MSC_RELEASE	1309
PERLEN	1309
STINACNT_MSC	1309
STINADURAT_MSC	1310
SYS7IND_MSC_C7RTSET	1310
MSCOutTrunk Primitive Calculations	1310
GRAPHmultiLineSeparator	1310
NUMDAYS	1310
NUMHOURS	1311
MSCOutTrunk Peg Counts	1311
BANSWCNT	1311
CONVLACC	1311
IDISCCNT	1311
MSC_RELEASE	1311
OCONGCNT	1311
ODISCCNT	1311
OTTIME	1311
PERLENSEC	1311
SCANCNT	1311
SCANNINT	1311
THCONCNT	1312
TRALACC	1312
MSCTrunkDest Primitive Calculations	1312
BANSWCNT_TrunkDest	1312
CONVLACC_TrunkDest	1312
DestinationTraffic_AfterBAnsw	1312
DestinationTraffic_BeforeBAnsw	1312
GRAPHmultiLineSeparator	1312
IDISCCNT_TrunkDest	1313
INTERVALS_TRDIP	1313
NUMDAYS	1313
NUMHOURS	1313
OCONGCNT_TrunkDest	1313
ODISCCNT_TrunkDest	1313
OTTIME_TrunkDest	1313
SCANCNT_TrunkDest	1314
SCANNINT_TrunkDest	1314
THCONCNT_TrunkDest	1314
TRALACC_TrunkDest	1314
MSCTrunkDest Peg Counts	1314
BANSWCNT	1314
CONVLACC	1315
IDISCCNT	1315
MSC_Release	1315
OCONGCNT	1315
ODISCCNT	1316
OTTIME	1316
PERLEN_TRDIP	1316

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SCANCNT	1316
SCANNINT	1317
THCONCNT	1317
TRALACC	1317
MSCTrunkType Primitive Calculations	1317
GRAPHmultiLineSeparator	1318
INTERVALS	1318
LocalName	1318
NUMDAYS	1318
NUMHOURS	1318
VENDORTECH	1318
MSCTrunkType Peg Counts	1318
MSC_RELEASE	1319
NDISS	1319
NDISSBLOC	1319
NFAUSBLOC	1319
NNOTSEIZE	1320
NQUAS	1320
NQUASBLOC	1320
PERLEN	1320
Multiplex_Section Primitive Calculations	1321
GRAPHmultiLineSeparator	1321
LocalName	1321
NUMDAYS	1321
NUMHOURS	1321
Multiplex_Section Peg Counts	1321
MSFBBE	1321
MSFES	1322
MSFSES	1322
MSFUAS	1322
MSFUAV	1323
MSNBBE	1323
MSNES	1323
MSNSES	1323
MSNUAS	1324
MSNUAV	1324
PERLEN	1324
SMI	1325
NB_MSC Primitive Calculations	1325
GRAPHmultiLineSeparator	1325
INTERVALS	1325
LocalName	1325
NUMDAYS	1325
NUMHOURS	1326
VENDORTECH	1326
NB_MSC Peg Counts	1326
MSC_RELEASE	1326
NBIRASDHTOT	1326
NBIRATCHTOT	1326
NBNSCASUCC	1327

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NBNSCATOT	1327
NBORASDHTOT	1327
NBORATCHTOT	1328
NBRASDHTOT	1328
NBRATCHTOT	1328
NBRSASDHSUCC	1329
NBRSATCHSUCC	1329
NBSCHASUCC	1329
NBSCHATOT	1330
NBSIRASDHSUCC	1330
NBSIRATCHSUCC	1330
NBSORASDHSUCC	1331
NBSORATCHSUCC	1331
NBSRASDHTOT	1331
NBSRATCHTOT	1332
NBSRATSDHTOT	1332
NBSRATTCHTOT	1332
NBSSRAATCHSUCC	1333
NBSSRASDHSUCC	1333
NBSSRATSDHSUCC	1333
NBSSRATTCHSUCC	1334
NCELHND SUCC	1334
NCELHN DTOT	1334
NNBRBUGASCSUCC	1335
NNBRBUGASCTOT	1335
NNBRBUGASUCC	1335
NNBRBUGATOT	1336
NNBRBUGSTSUCC	1336
NNBRBUGSTTOT	1336
NNBRHBAISDHSUCC	1337
NNBRHBAISDHTOT	1337
NNBRHBANSUCC	1337
NNBRHBANTOT	1338
NNBRHBAOSDHSUCC	1338
NNBRHBAOSDHTOT	1338
NNBRHBSTSUCC	1338
NNBRHBSTTOT	1339
NNBRHBTTSUCC	1339
NNBRHBTTTOT	1339
NNBRHINASUCC	1340
NNBRHINATOT	1340
NNBRHSANSUCC	1340
NNBRHSANTOT	1341
NNBRHSISDHSUCC	1341
NNBRHSISDHTOT	1341
NNBRHSNASUCC	1342
NNBRHSNATOT	1342
NNBRHSOSDHSUCC	1342
NNBRHSOSDHTOT	1343
NNBRHTHISDHSUCC	1343
NNBRHTHISDHTOT	1343

PERFORMANCE DATA REFERENCE

Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NNBRHTHISUCC	1344
NNBRHTHISUCC	1344
NNBRIHOATCHTOT	1344
NNBRISDHHOATOT	1345
NNBRITCHHOASUCC	1345
NNBRNSUGSCASUCC	1346
NNBRNUGSCATOT	1346
NNBRSCHARSUCC	1346
NNBRSCHARTOT	1347
NNBRSCHASSUCC	1347
NNBRSCHASTOT	1347
NNBRSIHOATCHSUCC	1348
NNBRNSUGSCASUCC	1348
NNBRNSUGSSUCC	1348
NNBRNSUGSTOT	1349
NNBRNSUGSUCC	1349
NNBRNSUGTOT	1349
NNBRUGSCATOT	1350
NNGSUSCASUCC	1350
NNGUHASUCC	1350
NNGUHATOT	1351
NNGUHBSUCC	1351
NNGUHBTOT	1351
NNGUHISSUCC	1351
NNGUHISSUCC	1352
NNGUHISSUCC	1352
NNGUHISSUCC	1352
NNGUHISSUCC	1353
NNGUHSSTOT	1353
NNGUHSSTOT	1353
NNGUHSSTOT	1353
NNGUHSSTOT	1354
NNGUHTSSUCC	1354
NNGUHTSTOT	1354
NNGUHTSUCC	1355
NNGUHTTOT	1355
NNGUSCATOT	1355
NNGUSTSUCC	1356
NNGUSTTOT	1356
NNSCHASUCC	1356
NNSCHATOT	1357
PERLEN	1357
NBCell Primitive Calculations	1357
GRAPHmultiLineSeparator	1357
HO_CAUSEALL	1357
HO_DIRRETRY	1357
HO_DWNLKLV	1357
HO_LOST	1358
HO_SUC%	1358
HO_SUCBTCEL%	1358
HO_SUCHIHR%	1358
HO_SUCWRCEL%	1358

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

HO_UPLNKLVL	1358
HOE_LOST	1358
HOE_LOST%	1359
HOE_SUC	1359
HOE_TOT	1359
HOI_LOST	1359
HOI_LOST%	1359
HOI_SUC	1359
HOI_TOT	1360
INTERVALS	1360
LocalName	1360
NUMDAYS	1360
NUMHOURS	1360
VENDORTECH	1360
NBCell Peg Counts	1360
BSS_RELEASE	1361
HOASBCL	1361
HOASWCL	1361
HOATTHR	1361
HOATTHSS	1362
HOATTLSS	1362
HOATTSHOULOUTRAN	1363
HODUPFT	1363
HODWNQA	1363
HOEXCTA	1364
HOREQCNTUTRAN	1364
HORTTOCH	1364
HORTTOCHUTRAN	1365
HOSUCBCL	1365
HOSUCHR	1366
HOSUCWCL	1366
HOTOHCS	1366
HOTOKCL	1367
HOTOLCL	1367
HOUPLQA	1368
HOVERCNT	1368
HOVERCNTUTRAN	1368
HOVERSUC	1369
HOVERSUCUTRAN	1369
NBTYPE	1369
PERLEN	1369
SUCURGHOUTRAN	1369
URGHOVERUTRAN	1370
NI Primitive Calculations	1370
GRAPHmultiLineSeparator	1370
NUMDAYS	1370
NUMHOURS	1370
ProblemCode Primitive Calculations	1371
GRAPHmultiLineSeparator	1371
INTERVALS	1371

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	1371
NUMHOURS	1371
VENDORTECH	1371
ProblemCode Peg Counts	1371
MSC_RELEASE	1372
NERRSIT	1372
PERLEN	1372
RECEIVED	1372
SENT	1372
QOS Primitive Calculations	1373
Ave_LLC_PDU_per_TBF	1373
Ave_LLC_PDU_Throughput	1373
GRAPHmultiLineSeparator	1373
INTERVALS	1373
LocalName	1373
Nof_TBF	1373
NUMDAYS	1374
NUMHOURS	1374
VENDORTECH	1374
QOS Peg Counts	1374
BSS_RELEASE	1374
NUMBERLLCPDU	1374
NUMBERTBF	1375
PERLEN	1375
PFCLIFETIME	1375
Radio Primitive Calculations	1375
GRAPHmultiLineSeparator	1375
NUMDAYS	1376
NUMHOURS	1376
Radio Peg Counts	1376
Transiver_ID	1376
RNCSTAT Primitive Calculations	1376
GRAPHmultiLineSeparator	1376
NUMDAYS	1376
NUMHOURS	1376
VENDORTECH	1377
RNCSTAT Peg Counts	1377
MSC_RELEASE	1377
NBSTSSMTOT	1377
NRNFRMSCCI	1377
NRNFRMTOTI	1378
NRNFRRTOT	1378
NRNTIHRSUCC	1378
NRNTIHRUSUCC	1378
NRNTRLRCTOT	1379
NRNTRLRDRTOT	1379
NRNTRLRDSUCC	1379
NRNTRLRSUCC	1380
NRNTOHRSUCC	1380
NRNTOMSCCO	1380

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NRNTOMTOTO	1381
NRNTORGSUCC	1381
NRNTORRTOT	1381
NRNTRRCTOT	1382
NRNTRRRGTOT	1382
NRNTRRRTOT	1382
NRNTSRRTOT	1383
NRNTSRRUTOT	1383
PERLEN	1383
RXOTS Primitive Calculations	1383
GRAPHmultiLineSeparator	1383
INTERVALS	1383
NUMDAYS	1384
NUMHOURS	1384
VENDORTECH	1384
RXOTS Peg Counts	1384
BSS_RELEASE	1384
CONCNT	1384
CONERRCNT	1385
ID1_MOTS	1385
ID2_MOTS	1385
PERLEN	1385
SAE Primitive Calculations	1386
GRAPHmultiLineSeparator	1386
INTERVALS	1386
NUMDAYS	1386
NUMHOURS	1386
VENDORTECH	1386
SAE Peg Counts	1386
ID1_MSC_SAE	1386
ID2_MSC_SAE	1387
MSC_RELEASE	1387
NCALLS_MSC_SAE	1387
NIND_MSC_SAE	1387
NOVERFLOW_MSC_SAE	1388
NSCAN_MSC_SAE	1388
NTRAL_MSC_SAE	1388
NTRALACC_MSC_SAE	1389
PERLEN	1389
SAE_Block Primitive Calculations	1389
GRAPHmultiLineSeparator	1389
NUMDAYS	1389
NUMHOURS	1389
ServFeature_MSC Primitive Calculations	1390
GRAPHmultiLineSeparator	1390
NUMDAYS	1390
NUMHOURS	1390
ServFeature_MSC Peg Counts	1390
NSERVFEATINV	1390
SGSN_MSC Primitive Calculations	1390

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GRAPHmultiLineSeparator	1390
NUMDAYS	1391
NUMHOURS	1391
SGSN_MSC Peg Counts	1391
NPAG1SGSNTOT	1391
NPAG2SGSNTOT	1391
NSGSNRESETREC	1391
NSGSNRESETSENT	1391
SPG Primitive Calculations	1391
GRAPHmultiLineSeparator	1391
NUMDAYS	1391
NUMHOURS	1392
SPNode Primitive Calculations	1392
GRAPHmultiLineSeparator	1392
INTERVALS	1392
NUMDAYS	1392
NUMHOURS	1392
VENDORTECH	1392
SPNode Peg Counts	1393
ACCFRPM	1393
ACCLOAD	1393
ACCSPIST	1393
BSS_RELEASE	1394
DATALOSTFLAG_SPSP	1394
MAXFRPM	1394
MINFRPM	1394
NOLRGUPFMS	1395
NOSMUPFMS	1395
NPERREL	1395
NPERRES	1396
NREL_A_SPSP	1396
NRELM_SPSP	1396
NRESA	1396
NRESM	1397
NSCAN	1397
PERLEN	1397
SIZEPM	1397
Subcell Primitive Calculations	1398
GRAPHmultiLineSeparator	1398
NUMDAYS	1398
NUMHOURS	1398
Subcell Peg Counts	1398
AMR_Connection_Filter	1398
BSPOWER_10Range_10	1399
BSPOWER_12Range_12	1399
BSPOWER_14Range_14	1399
BSPOWER_16Range_16	1399
BSPOWER_18Range_18	1399
BSPOWER_20Range_20	1399
BSPOWER_22Range_22	1399

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

BSPOWER_24Range_24	1400
BSPOWER_26Range_26	1400
BSPOWER_28Range_28	1400
BSPOWER_2Range_2	1400
BSPOWER_30Range_30	1400
BSPOWER_4Range_4	1400
BSPOWER_6Range_6	1401
BSPOWER_8Range_8	1401
BSPOWER0Range0	1401
CellSetName	1401
MSPOWER0Range0	1401
MSPOWER10Range10	1401
MSPOWER11Range11	1401
MSPOWER12Range12	1402
MSPOWER13Range13	1402
MSPOWER14Range14	1402
MSPOWER15Range15	1402
MSPOWER16Range16	1402
MSPOWER17Range17	1402
MSPOWER18Range18	1403
MSPOWER19Range19	1403
MSPOWER1Range1	1403
MSPOWER20Range20	1403
MSPOWER21Range21	1403
MSPOWER22Range22	1403
MSPOWER23Range23	1403
MSPOWER24Range24	1404
MSPOWER25Range25	1404
MSPOWER26Range26	1404
MSPOWER27Range27	1404
MSPOWER28Range28	1404
MSPOWER29Range29	1404
MSPOWER2Range2	1405
MSPOWER30Range30	1405
MSPOWER31Range31	1405
MSPOWER32Range32	1405
MSPOWER33Range33	1405
MSPOWER34Range34	1405
MSPOWER35Range35	1405
MSPOWER36Range36	1406
MSPOWER37Range37	1406
MSPOWER38Range38	1406
MSPOWER39Range39	1406
MSPOWER3Range3	1406
MSPOWER4Range4	1406
MSPOWER5Range5	1407
MSPOWER6Range6	1407
MSPOWER7Range7	1407
MSPOWER8Range8	1407
MSPOWER9Range9	1407
noOfMeasFiltered	1407

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

noOfMeasUnfiltered	1407
PATHLOSSDIFF_10Range_10	1408
PATHLOSSDIFF_11Range_11	1408
PATHLOSSDIFF_12Range_12	1408
PATHLOSSDIFF_13Range_13	1408
PATHLOSSDIFF_14Range_14	1408
PATHLOSSDIFF_15Range_15	1408
PATHLOSSDIFF_16Range_16	1409
PATHLOSSDIFF_17Range_17	1409
PATHLOSSDIFF_18Range_18	1409
PATHLOSSDIFF_19Range_19	1409
PATHLOSSDIFF_1Range_1	1409
PATHLOSSDIFF_20Range_20	1409
PATHLOSSDIFF_21Range_21	1409
PATHLOSSDIFF_22Range_22	1410
PATHLOSSDIFF_23Range_23	1410
PATHLOSSDIFF_24Range_24	1410
PATHLOSSDIFF_25Range_25	1410
PATHLOSSDIFF_2Range_2	1410
PATHLOSSDIFF_3Range_3	1410
PATHLOSSDIFF_4Range_4	1411
PATHLOSSDIFF_5Range_5	1411
PATHLOSSDIFF_6Range_6	1411
PATHLOSSDIFF_7Range_7	1411
PATHLOSSDIFF_8Range_8	1411
PATHLOSSDIFF_9Range_9	1411
PATHLOSSDIFF0Range0	1411
PATHLOSSDIFF10Range10	1412
PATHLOSSDIFF11Range11	1412
PATHLOSSDIFF12Range12	1412
PATHLOSSDIFF13Range13	1412
PATHLOSSDIFF14Range14	1412
PATHLOSSDIFF15Range15	1412
PATHLOSSDIFF16Range16	1413
PATHLOSSDIFF17Range17	1413
PATHLOSSDIFF18Range18	1413
PATHLOSSDIFF19Range19	1413
PATHLOSSDIFF1Range1	1413
PATHLOSSDIFF20Range20	1413
PATHLOSSDIFF21Range21	1413
PATHLOSSDIFF22Range22	1414
PATHLOSSDIFF23Range23	1414
PATHLOSSDIFF24Range24	1414
PATHLOSSDIFF25Range25	1414
PATHLOSSDIFF2Range2	1414
PATHLOSSDIFF3Range3	1414
PATHLOSSDIFF4Range4	1415
PATHLOSSDIFF5Range5	1415
PATHLOSSDIFF6Range6	1415
PATHLOSSDIFF7Range7	1415
PATHLOSSDIFF8Range8	1415

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSDIFF9Range9	1415
PATHLOSSDL100Range101	1415
PATHLOSSDL102Range103	1416
PATHLOSSDL104Range105	1416
PATHLOSSDL106Range107	1416
PATHLOSSDL108Range109	1416
PATHLOSSDL110Range111	1416
PATHLOSSDL112Range113	1416
PATHLOSSDL114Range115	1417
PATHLOSSDL116Range117	1417
PATHLOSSDL118Range119	1417
PATHLOSSDL120Range121	1417
PATHLOSSDL122Range123	1417
PATHLOSSDL124Range125	1417
PATHLOSSDL126Range127	1417
PATHLOSSDL128Range129	1418
PATHLOSSDL130Range131	1418
PATHLOSSDL132Range133	1418
PATHLOSSDL134Range135	1418
PATHLOSSDL136Range137	1418
PATHLOSSDL138Range139	1418
PATHLOSSDL140Range141	1419
PATHLOSSDL142Range143	1419
PATHLOSSDL144Range145	1419
PATHLOSSDL146Range147	1419
PATHLOSSDL148Range149	1419
PATHLOSSDL150Range151	1419
PATHLOSSDL152Range153	1419
PATHLOSSDL154Range155	1420
PATHLOSSDL156Range157	1420
PATHLOSSDL158Range190	1420
PATHLOSSDL30Range31	1420
PATHLOSSDL32Range33	1420
PATHLOSSDL34Range35	1420
PATHLOSSDL36Range37	1421
PATHLOSSDL38Range39	1421
PATHLOSSDL40Range41	1421
PATHLOSSDL42Range43	1421
PATHLOSSDL44Range45	1421
PATHLOSSDL46Range47	1421
PATHLOSSDL48Range49	1421
PATHLOSSDL50Range51	1422
PATHLOSSDL52Range53	1422
PATHLOSSDL54Range55	1422
PATHLOSSDL56Range57	1422
PATHLOSSDL58Range59	1422
PATHLOSSDL60Range61	1422
PATHLOSSDL62Range63	1423
PATHLOSSDL64Range65	1423
PATHLOSSDL66Range67	1423
PATHLOSSDL68Range69	1423

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSDL70Range71	1423
PATHLOSSDL72Range73	1423
PATHLOSSDL74Range75	1423
PATHLOSSDL76Range77	1424
PATHLOSSDL78Range79	1424
PATHLOSSDL80Range81	1424
PATHLOSSDL82Range83	1424
PATHLOSSDL84Range85	1424
PATHLOSSDL86Range87	1424
PATHLOSSDL88Range89	1425
PATHLOSSDL90Range91	1425
PATHLOSSDL92Range93	1425
PATHLOSSDL94Range95	1425
PATHLOSSDL96Range97	1425
PATHLOSSDL98Range99	1425
PATHLOSSUL100Range101	1425
PATHLOSSUL102Range103	1426
PATHLOSSUL104Range105	1426
PATHLOSSUL106Range107	1426
PATHLOSSUL108Range109	1426
PATHLOSSUL110Range111	1426
PATHLOSSUL112Range113	1426
PATHLOSSUL114Range115	1427
PATHLOSSUL116Range117	1427
PATHLOSSUL118Range119	1427
PATHLOSSUL120Range121	1427
PATHLOSSUL122Range123	1427
PATHLOSSUL124Range125	1427
PATHLOSSUL126Range127	1427
PATHLOSSUL128Range129	1428
PATHLOSSUL130Range131	1428
PATHLOSSUL132Range133	1428
PATHLOSSUL134Range135	1428
PATHLOSSUL136Range137	1428
PATHLOSSUL138Range139	1428
PATHLOSSUL140Range141	1429
PATHLOSSUL142Range143	1429
PATHLOSSUL144Range145	1429
PATHLOSSUL146Range147	1429
PATHLOSSUL148Range153	1429
PATHLOSSUL30Range31	1429
PATHLOSSUL32Range33	1429
PATHLOSSUL34Range35	1430
PATHLOSSUL36Range37	1430
PATHLOSSUL38Range39	1430
PATHLOSSUL40Range41	1430
PATHLOSSUL42Range43	1430
PATHLOSSUL44Range45	1430
PATHLOSSUL46Range47	1431
PATHLOSSUL48Range49	1431
PATHLOSSUL50Range51	1431

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PATHLOSSUL52Range53	1431
PATHLOSSUL54Range55	1431
PATHLOSSUL56Range57	1431
PATHLOSSUL58Range59	1431
PATHLOSSUL60Range61	1432
PATHLOSSUL62Range63	1432
PATHLOSSUL64Range65	1432
PATHLOSSUL66Range67	1432
PATHLOSSUL68Range69	1432
PATHLOSSUL70Range71	1432
PATHLOSSUL72Range73	1433
PATHLOSSUL74Range75	1433
PATHLOSSUL76Range77	1433
PATHLOSSUL78Range79	1433
PATHLOSSUL80Range81	1433
PATHLOSSUL82Range83	1433
PATHLOSSUL84Range85	1433
PATHLOSSUL86Range87	1434
PATHLOSSUL88Range89	1434
PATHLOSSUL90Range91	1434
PATHLOSSUL92Range93	1434
PATHLOSSUL94Range95	1434
PATHLOSSUL96Range97	1434
PATHLOSSUL98Range99	1435
PERLENSEC	1435
RXLEVDL0Range0	1435
RXLEVDL10Range10	1435
RXLEVDL11Range11	1435
RXLEVDL12Range12	1435
RXLEVDL13Range13	1435
RXLEVDL14Range14	1436
RXLEVDL15Range15	1436
RXLEVDL16Range16	1436
RXLEVDL17Range17	1436
RXLEVDL18Range18	1436
RXLEVDL19Range19	1436
RXLEVDL1Range1	1437
RXLEVDL20Range20	1437
RXLEVDL21Range21	1437
RXLEVDL22Range22	1437
RXLEVDL23Range23	1437
RXLEVDL24Range24	1437
RXLEVDL25Range25	1437
RXLEVDL26Range26	1438
RXLEVDL27Range27	1438
RXLEVDL28Range28	1438
RXLEVDL29Range29	1438
RXLEVDL2Range2	1438
RXLEVDL30Range30	1438
RXLEVDL31Range31	1439
RXLEVDL32Range32	1439

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXLEVDL33Range33	1439
RXLEVDL34Range34	1439
RXLEVDL35Range35	1439
RXLEVDL36Range36	1439
RXLEVDL37Range37	1439
RXLEVDL38Range38	1440
RXLEVDL39Range39	1440
RXLEVDL3Range3	1440
RXLEVDL40Range40	1440
RXLEVDL41Range41	1440
RXLEVDL42Range42	1440
RXLEVDL43Range43	1441
RXLEVDL44Range44	1441
RXLEVDL45Range45	1441
RXLEVDL46Range46	1441
RXLEVDL47Range47	1441
RXLEVDL48Range48	1441
RXLEVDL49Range49	1441
RXLEVDL4Range4	1442
RXLEVDL50Range50	1442
RXLEVDL51Range51	1442
RXLEVDL52Range52	1442
RXLEVDL53Range53	1442
RXLEVDL54Range54	1442
RXLEVDL55Range55	1443
RXLEVDL56Range56	1443
RXLEVDL57Range57	1443
RXLEVDL58Range58	1443
RXLEVDL59Range59	1443
RXLEVDL5Range5	1443
RXLEVDL60Range60	1443
RXLEVDL61Range61	1444
RXLEVDL62Range62	1444
RXLEVDL63Range63	1444
RXLEVDL6Range6	1444
RXLEVDL7Range7	1444
RXLEVDL8Range8	1444
RXLEVDL9Range9	1445
RXLEVUL0Range0	1445
RXLEVUL10Range10	1445
RXLEVUL11Range11	1445
RXLEVUL12Range12	1445
RXLEVUL13Range13	1445
RXLEVUL14Range14	1445
RXLEVUL15Range15	1446
RXLEVUL16Range16	1446
RXLEVUL17Range17	1446
RXLEVUL18Range18	1446
RXLEVUL19Range19	1446
RXLEVUL1Range1	1446
RXLEVUL20Range20	1447

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXLEVUL21Range21	1447
RXLEVUL22Range22	1447
RXLEVUL23Range23	1447
RXLEVUL24Range24	1447
RXLEVUL25Range25	1447
RXLEVUL26Range26	1447
RXLEVUL27Range27	1448
RXLEVUL28Range28	1448
RXLEVUL29Range29	1448
RXLEVUL2Range2	1448
RXLEVUL30Range30	1448
RXLEVUL31Range31	1448
RXLEVUL32Range32	1449
RXLEVUL33Range33	1449
RXLEVUL34Range34	1449
RXLEVUL35Range35	1449
RXLEVUL36Range36	1449
RXLEVUL37Range37	1449
RXLEVUL38Range38	1449
RXLEVUL39Range39	1450
RXLEVUL3Range3	1450
RXLEVUL40Range40	1450
RXLEVUL41Range41	1450
RXLEVUL42Range42	1450
RXLEVUL43Range43	1450
RXLEVUL44Range44	1451
RXLEVUL45Range45	1451
RXLEVUL46Range46	1451
RXLEVUL47Range47	1451
RXLEVUL48Range48	1451
RXLEVUL49Range49	1451
RXLEVUL4Range4	1451
RXLEVUL50Range50	1452
RXLEVUL51Range51	1452
RXLEVUL52Range52	1452
RXLEVUL53Range53	1452
RXLEVUL54Range54	1452
RXLEVUL55Range55	1452
RXLEVUL56Range56	1453
RXLEVUL57Range57	1453
RXLEVUL58Range58	1453
RXLEVUL59Range59	1453
RXLEVUL5Range5	1453
RXLEVUL60Range60	1453
RXLEVUL61Range61	1453
RXLEVUL62Range62	1454
RXLEVUL63Range63	1454
RXLEVUL6Range6	1454
RXLEVUL7Range7	1454
RXLEVUL8Range8	1454
RXLEVUL9Range9	1454

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RXQUALDL0Range0	1455
RXQUALDL1Range1	1455
RXQUALDL2Range2	1455
RXQUALDL3Range3	1455
RXQUALDL4Range4	1455
RXQUALDL5Range5	1455
RXQUALDL6Range6	1455
RXQUALDL7Range7	1456
RXQUALUL0Range0	1456
RXQUALUL1Range1	1456
RXQUALUL2Range2	1456
RXQUALUL3Range3	1456
RXQUALUL4Range4	1456
RXQUALUL5Range5	1457
RXQUALUL6Range6	1457
RXQUALUL7Range7	1457
TAVAL0Range0	1457
TAVAL104Range113	1457
TAVAL10Range10	1457
TAVAL114Range123	1457
TAVAL11Range11	1458
TAVAL124Range133	1458
TAVAL12Range12	1458
TAVAL134Range143	1458
TAVAL13Range13	1458
TAVAL144Range163	1458
TAVAL14Range14	1459
TAVAL15Range15	1459
TAVAL164Range183	1459
TAVAL16Range16	1459
TAVAL17Range17	1459
TAVAL184Range203	1459
TAVAL18Range18	1459
TAVAL19Range19	1460
TAVAL1Range1	1460
TAVAL204Range219	1460
TAVAL20Range20	1460
TAVAL21Range21	1460
TAVAL22Range22	1460
TAVAL23Range23	1461
TAVAL24Range24	1461
TAVAL25Range25	1461
TAVAL26Range26	1461
TAVAL27Range27	1461
TAVAL28Range28	1461
TAVAL29Range29	1461
TAVAL2Range2	1462
TAVAL30Range30	1462
TAVAL31Range31	1462
TAVAL32Range32	1462
TAVAL33Range33	1462

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TAVAL34Range34	1462
TAVAL35Range35	1463
TAVAL36Range36	1463
TAVAL37Range37	1463
TAVAL38Range38	1463
TAVAL39Range39	1463
TAVAL3Range3	1463
TAVAL40Range40	1463
TAVAL41Range41	1464
TAVAL42Range42	1464
TAVAL43Range43	1464
TAVAL44Range44	1464
TAVAL45Range45	1464
TAVAL46Range46	1464
TAVAL47Range47	1465
TAVAL48Range48	1465
TAVAL49Range49	1465
TAVAL4Range4	1465
TAVAL50Range50	1465
TAVAL51Range51	1465
TAVAL52Range52	1465
TAVAL53Range53	1466
TAVAL54Range54	1466
TAVAL55Range55	1466
TAVAL56Range56	1466
TAVAL57Range57	1466
TAVAL58Range58	1466
TAVAL59Range59	1467
TAVAL5Range5	1467
TAVAL60Range60	1467
TAVAL61Range61	1467
TAVAL62Range62	1467
TAVAL63Range63	1467
TAVAL64Range73	1467
TAVAL6Range6	1468
TAVAL74Range83	1468
TAVAL7Range7	1468
TAVAL84Range93	1468
TAVAL8Range8	1468
TAVAL94Range103	1468
TAVAL9Range9	1469
Subsystem_Number Primitive Calculations	1469
GRAPHmultiLineSeparator	1469
NUMDAYS	1469
NUMHOURS	1469
Subsystem_Number Peg Counts	1469
COMINCINT	1469
COMOUTINT	1470
COMSGORIG	1470
COMSGTERM	1470
DT1ORIG	1471

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

DT1TERM	1471
PERLEN	1471
Super_Channel Primitive Calculations	1471
GRAPHmultiLineSeparator	1471
NUMDAYS	1471
NUMHOURS	1472
Super_Channel Peg Counts	1472
AVDELDLSCBUF	1472
AVDELULSCBUF	1472
DL7075SCLOAD	1472
DL7680SCLOAD	1473
DL8185SCLOAD	1473
DL8690SCLOAD	1473
DL9195SCLOAD	1474
DL9600SCLOAD	1474
DLCSSCBUFTHR	1474
DLPSSCBUFTHR	1475
KBMAXREC	1475
KBMAXSENT	1475
KBREC	1476
KBSCAN	1476
KBSSENT	1476
LOSTDLPACK	1477
LOSTULPACK	1477
SC	1477
SCGR	1478
THRDLPACK	1478
THRULPACK	1478
TOTDLPSSCFRBUF	1479
TOTFRDLSCBUF	1479
TOTFRULSCBUF	1479
TOTULPSSCFRBUF	1480
UL7075SCLOAD	1480
UL7680SCLOAD	1480
UL8185SCLOAD	1481
UL8690SCLOAD	1481
UL9195SCLOAD	1481
UL9600SCLOAD	1482
ULPSSCBUFTHR	1482
ULSCBUFTHR	1482
SUPPSERVICE Primitive Calculations	1483
GRAPHmultiLineSeparator	1483
INTERVALS	1483
LocalName	1483
NUMDAYS	1483
NUMHOURS	1483
VENDORTECH	1483
SUPPSERVICE Peg Counts	1484
MSC_RELEASE	1484
NSSINTTOT	1484

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NSSINVTOT	1484
NSSIT1TOT	1484
NSSIT2TOT	1485
NSSIV1TOT	1485
NSSIV2TOT	1485
NSSIVS1TOT	1486
NSSIVS2TOT	1486
NSSIVSTOT	1486
NSSRETTOT	1487
NSSRT1TOT	1487
NSSRT2TOT	1487
PERLEN	1487
Switch_Netw_Terminal Primitive Calculations	1488
GRAPHmultiLineSeparator	1488
NUMDAYS	1488
NUMHOURS	1488
Switch_Netw_Terminal Peg Counts	1488
BLOL	1488
NBLOCACC	1489
NDEV	1489
PERLEN	1489
Synchr_Digi_paths Primitive Calculations	1489
GRAPHmultiLineSeparator	1489
NUMDAYS	1490
NUMHOURS	1490
System Primitive Calculations	1490
GRAPHmultiLineSeparator	1490
NUMDAYS	1490
NUMHOURS	1490
PercentActiveSubscribers	1490
PercentRegisteredSubscribers	1491
pTotalGGSNPacketSuccessRate	1491
pTotalSessionManSuccessRateGGSN	1491
RegisteredInroamers	1491
RegisteredOutroamer	1491
SubscribersHLR	1491
SubscribersVLR	1491
TotalCellTCHTraffic	1492
TotalSwitchedTraffic	1492
TCAP_Obj Primitive Calculations	1492
GRAPHmultiLineSeparator	1492
INTERVALS	1492
NUMDAYS	1492
NUMHOURS	1492
VENDORTECH	1493
TCAP_Obj Peg Counts	1493
DETECT	1493
MSC_RELEASE	1493
PERLEN	1493
RECEIVED_TCCMP	1493

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RECEIVED_TCDIA	1494
RECEIVED_TCMMSG	1494
SENT_TCCMP	1494
SENT_TCDIA	1494
SENT_TCMMSG	1495
URECEIVED	1495
USENT	1495
TCAP_SubSystem Primitive Calculations	1496
GRAPHmultiLineSeparator	1496
INTERVALS	1496
NUMDAYS	1496
NUMHOURS	1496
VENDORTECH	1496
TCAP_SubSystem Peg Counts	1497
MSC_RELEASE	1497
NMSGDLVDSSN	1497
NMSGORIGSSN	1497
PERLEN	1497
Time_Slot Primitive Calculations	1497
GRAPHmultiLineSeparator	1498
INTERVALS	1498
NUMDAYS	1498
NUMHOURS	1498
Time_Slot Peg Counts	1498
BSS_RELEASE	1498
CONCNT	1498
CONERRCNT	1499
ID1_MOTS	1499
ID2_MOTS	1499
PERLEN	1500
TrafficType Primitive Calculations	1500
AnsSwitchedCalls	1500
FailedSwitchedCalls	1500
GRAPHmultiLineSeparator	1500
INTERVALS	1500
INTERVALS_TRART	1500
NANSW	1500
NCALLS	1501
NECONG	1501
NICONG	1501
NSCAN	1501
NTRALACC	1501
NUMDAYS	1501
NUMHOURS	1501
NUNSUC	1502
PercentageAnsweredSwitchedCalls	1502
PercentageFailedSwitchedCalls	1502
SwitchedAttmpt	1502
SwitchedCalls	1502
SwitchedTraffic	1502

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TT_AnsBidRatio	1502
TT_AnsSeizeRatio	1503
TT_RejCalls	1503
TT_Seizures	1503
TT_Traffic	1503
VENDORTECH	1503
TrafficType Peg Counts	1503
MSC_RELEASE	1503
NANSW_MTRAFTYPE	1504
NANSW_TRAFFTYPE	1504
NAREPLACE	1504
NBLOBY	1504
NBLOOY	1505
NBUSY	1505
NCALLS_MTRAFTYPE	1505
NCALLS_TRAFFTYPE	1506
NCONGSIG	1506
NDVB	1506
NDVO	1507
NECONG_MTRAFTYPE	1507
NECONG_TRAFFTYPE	1507
NFAULTSIG	1508
NICONG_MTRAFTYPE	1508
NICONG_TRAFFTYPE	1508
NINACC	1509
NISDNCALLS	1509
NLKPDSIG	1509
NNMBLOC	1509
NNONEX	1510
NRELAFTD	1510
NRELBEFD	1510
NRELDURD	1511
NSCAN_MTRAFTYPE	1511
NSCAN_TRAFFTYPE	1511
NSUEOS	1512
NTHCON	1512
NTIMEOUT	1512
NTOBEFD	1513
NTODURD	1513
NTRALACC_MTRAFTYPE	1513
NTRALACC_TRAFFTYPE	1513
NUNSUCCE_MTRAFTYPE	1514
NUNSUCCE_TRAFFTYPE	1514
PERLEN	1514
PERLEN_TRART	1515
TRAL_MTRAFTYPE	1515
TRAL_TRAFFTYPE	1515
TraffOrigin Primitive Calculations	1515
GRAPHmultiLineSeparator	1515
LocalName	1515
NUMDAYS	1516

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	1516
Transceiver_Group Primitive Calculations	1516
GRAPHmultiLineSeparator	1516
NUMDAYS	1516
NUMHOURS	1516
Transceiver_Group Peg Counts	1516
AVG16K	1517
AVG64K	1517
BSS_Release	1517
BUNDG0AVEDL	1517
BUNDG1AVEDL	1518
BUNDG2AVEDL	1518
BUNDG3AVEDL	1518
BUNDG4AVEDL	1519
CSDISCOVL	1519
DL0025JITBUFDEL	1519
DL100JITBUFDEL	1520
DL100STNLOAD	1520
DL2650JITBUFDEL	1520
DL5175JITBUFDEL	1521
DL7075STNLOAD	1521
DL7600JITBUFDEL	1521
DL7680STNLOAD	1522
DL8185STNLOAD	1522
DL8690STNLOAD	1522
DL9195STNLOAD	1523
DL9600STNLOAD	1523
DLDROPJBUF	1523
DLJITBUFAVDEL	1524
FRAG64K	1524
ID1	1524
ID2	1525
INTERCNT	1525
IPDLSENTPACK	1525
IPLOSTPACKUL	1526
IPNUMSCAN	1526
IPOVLL1	1526
IPOVLL2	1527
IPRECKBYTES	1527
IPSENTKBYTES	1527
IPULRECPACK	1527
MAX16K	1528
MAX64K	1528
MIN16K	1529
MIN64K	1529
PERLEN	1529
PSDISCOVL	1529
TG_ID	1530
TRASYNCCNT	1530
UL0025JITBUFDEL	1530
UL100JITBUFDEL	1530

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

UL100STNLOAD	1531
UL2650JITBUFDEL	1531
UL5175JITBUFDEL	1531
UL7075STNLOAD	1532
UL7600JITBUFDEL	1532
UL7680STNLOAD	1532
UL8185STNLOAD	1533
UL8690STNLOAD	1533
UL9195STNLOAD	1533
UL9600STNLOAD	1534
ULDROPIBUF	1534
ULJITBUFAVDEL	1534
Transcoder_Subpool Primitive Calculations	1535
GRAPHmultiLineSeparator	1535
NUMDAYS	1535
NUMHOURS	1535
Transcoder_Subpool Peg Counts	1535
PERLEN	1535
TPSUBACTR	1535
TPSUBAVTR	1536
TPSUBIDLTR	1536
TRC Primitive Calculations	1536
GRAPHmultiLineSeparator	1536
INTERVALS	1536
LocalName	1537
NUMDAYS	1537
NUMHOURS	1537
VENDORTECH	1537
TRC Peg Counts	1537
ALLOCATERATP	1537
ATERCONG	1538
AVATERTRCDEV	1538
BLATERTRCDEV	1538
BSS_RELEASE	1539
ID1_ATERTRANS	1539
PERLEN	1539
SALLOCATERATP	1539
SZATERTRCDEV	1539
SZSATERTRCDEV	1540
TRCNSCAN	1540
TRD Primitive Calculations	1540
GRAPHmultiLineSeparator	1540
INTERVALS	1541
LocalName	1541
NUMDAYS	1541
NUMHOURS	1541
VENDORTECH	1541
TRD Peg Counts	1541
BSS_RELEASE	1541
ID1_TRAPEVENT	1542

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLEN	1542
TPACC	1542
TPACTTR	1542
TPALLOC	1543
TPAVTR	1543
TPCONG	1543
TPCTIME	1544
TPIDLTR	1544
TPSYNCF	1544
TPTFOEST	1545
TPTFOESTATT	1545
TrunkRoute Primitive Calculations	1545
AnswerSeizureRatio_Percentage	1545
BanswersIncomingRoute	1545
BanswersOutgoingRoute	1546
Circuits_Available	1546
Congestion%	1546
DIMENSION	1546
GRAPHmultiLineSeparator	1546
GROWTH	1546
INTERVALS	1546
INTERVALS_TRAR	1547
NANSWERS_BW	1547
NCALLS_BW	1547
NISUPATP_BW	1547
NOVERFLOW_BW	1547
NRESTRICT_BW	1547
NSEMIPERC_BW	1547
NTRALACC_TRUNKROUTE_BW	1548
NumberOfBAnswers	1548
NumberOfBids	1548
NUMDAYS	1548
NUMHOURS	1548
PercentageCongestion	1548
PercentAnswerSeizeRatio	1548
PercentSuccessCalls	1549
Sample_Size	1549
TR_Correlation	1549
TR_Critical_Carried	1549
TR_Critical_Offered	1549
TR_Current_Util%	1549
TR_Est_GOS	1549
TR_Est_Lost	1550
TR_Exhaust_Date	1550
TR_Exhaust_Days	1550
TR_ExtraCircit_Req	1550
TR_Final_Util%	1550
TR_Forecast_Value1	1550
TR_Forecast_Value2	1551
TR_Forecast_Value3	1551
TR_GOS	1551

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

TR_N1Days_FCAST	1551
TR_N2Days_FCAST	1551
TR_N3Days_FCAST	1551
TR_PABH3	1551
TR_PABH5	1552
TR_Req_Ch	1552
TR_Traffic	1552
TR_Traffic_Off	1552
TR_Traffic_OneWay	1552
TR_Util_Offered	1552
Traffic	1553
TrafficBW	1553
TrafficInc	1553
TrafficOut	1553
TRAL_TRUNKROUTE_BW	1553
TrunkCallAttempts	1553
VENDORTECH	1553
TrunkRoute Peg Counts	1554
ACCTRAFCNTR	1554
BANS	1554
BBLOL	1554
BLKDDEVS	1555
BLOL_TRUNKROUTE	1555
ID1_TRUNKROUTE	1555
ID2_TRUNKROUTE	1556
LASTCONGCNT	1556
MSC_RELEASE	1556
NANSWERSI	1556
NANSWERSO	1557
NBBLOCACC	1557
NBIDS_TRAR	1557
NBLOCACC_TRUNKROUTE	1557
NC7DSEIZ	1558
NCALLSI	1558
NCALLSO	1558
NCONGBAS	1559
NCONGTRANS	1559
NDEV_TRAR	1559
NDEV_TRUNKROUTE	1560
NDSEIZ	1560
NISUPATPI	1560
NISUPATPO	1561
NOSEIZ_TRUNKROUTE	1561
NOVERFLOWI	1561
NOVERFLOWO	1561
NRESTRICTI	1562
NRESTRICTO	1562
NSCAN_TRUNKROUTE	1562
NSEMIPERCI	1563
NSEMIPERCO	1563
NTRALACCI_TRUNKROUTE	1563

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NTRALACCO_TRUNKROUTE	1564
PERLEN	1564
PERLEN_TRAR	1564
RESTRDEVCNT	1564
SUMTRAFLVL	1564
THROUGHRTTECNT	1565
TRALI_TRUNKROUTE	1565
TRALO_TRUNKROUTE	1565
TRK_TYPE	1566
UNSUC_BIDS	1566
VLR Primitive Calculations	1566
GRAPHmultiLineSeparator	1566
INTERVALS	1566
NUMDAYS	1567
NUMHOURS	1567
VENDORTECH	1567
VLR Peg Counts	1567
MSC_RELEASE	1567
NACTIVSS	1567
NACTTRAC	1568
NBEGACT	1568
NCANCEL	1568
NDEACTRA	1569
NDEACTSS	1569
NDELETE	1569
NERASESS	1569
NINSERT	1570
NINTRRSS	1570
NPROROA	1570
NPRSINFO	1571
NPURGEMS	1571
NPUSSDAR	1571
NPUSSRQR	1572
NREGPASS	1572
NREGTRSS	1572
NUPDLOC	1573
NUSSDNTS	1573
NUSSDRQS	1573
NVLRSVAVTOT	1574
NVLRSVSDTOT	1574
NVLRSVSECDSUCC	1574
NVLRSVSECDTOT	1574
PERLEN	1575
5 GSN Traffic Entities	1577
6 GSN Traffic Fields	1579
AddressFamily Primitive Calculations	1579
GRAPHmultiLineSeparator	1579
NUMDAYS	1579
NUMHOURS	1579
UnknownEnterpriseField	1579

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

AddressFamily Peg Counts	1580
collectionPeriod	1580
GSNRelease	1580
jnxRpfStatsBytes	1580
jnxRpfStatsPackets	1581
APN Primitive Calculations	1581
GRAPHmultiLineSeparator	1581
NUMDAYS	1581
NUMHOURS	1581
pAPNpacketSuccessRate	1582
pAPNSuccessRate	1582
pGTPaverPacktSizeDownlinkAPN	1582
pGTPaverPacktSizeUplinkAPN	1582
ppacketDropRateDownpAPN	1582
ppacketDropRateUplinkpAPN	1583
pPDPActFailpAPN	1583
pPDPActivMSFailpAPN	1583
pPDPDeActivGGSNFailpAPN	1583
pPDPDeActivMSFailpAPN	1583
pPDPDynamicAddrFailpAPN	1584
UnknownEnterpriseField	1584
APN Peg Counts	1584
attActPdpContDynPerApnOfGgsn	1584
attActPdpContextPerApnOfGgsn	1584
attDeactPdpContextByGgsnPerApn	1584
attDeactPdpContPerApnOfGgsn	1585
collectionPeriod	1585
collectionPeriod_SNMP	1585
ggsn_apn_avg_actcontext	1585
ggsn_apn_max_actcontext	1586
ggsn_att_da_pdp_act	1586
ggsn_att_deact	1586
ggsn_att_init_deact	1587
ggsn_att_ms_act	1587
ggsn_att_ms_deact	1587
ggsn_Att_pdp_act	1588
ggsn_cmp_da_pdp_act	1588
ggsn_cmp_init_deact	1588
ggsn_cmp_ms_act	1588
ggsn_cmp_ms_deact	1589
ggsn_cmp_pdp_act	1589
ggsnapn_err_ind_recvd	1589
ggsnapn_err_ind_trans	1590
ggsnApnActivePdpContextCount	1590
ggsnApnActivePdpContextCount_jn	1590
ggsnApnActivePdpContextMax	1591
ggsnApnActivePdpContextMean	1591
ggsnApnActPdpContextCountIpv6	1591
ggsnApnAtmptActivationIpv6	1591
ggsnApnAttemptedActivation	1592
ggsnApnAttemptedAuthActivation	1592

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ggsnApnAttemptedDeactivation	1592
ggsnApnAttemptedDynActivation	1593
ggsnApnAttemptedMSActivation	1593
ggsnApnAttemptedMSDeactivation	1593
ggsnApnAttemptedSelfDeactivation	1594
ggsnApnAttemptedUpdateMsAndSgsn	1594
ggsnApnCmpltdActivationIpv6	1594
ggsnApnCompletedActivation	1594
ggsnApnCompletedDeactivation	1595
ggsnApnCompletedDynActivation	1595
ggsnApnCompletedMSActivation	1595
ggsnApnCompletedMSDeactivation	1596
ggsnApnCompletedSelfDeactivation	1596
ggsnApnCompletedUpdateMsAndSgsn	1596
ggsnApnDownlinkBytes	1597
ggsnApnDownlinkBytes_jn	1597
ggsnApnDownlinkBytesIpv6	1597
ggsnApnDownlinkDrops	1597
ggsnApnDownlinkDrops_jn	1598
ggsnApnDownlinkDropsIpv6	1598
ggsnApnDownlinkPackets	1598
ggsnApnDownlinkPackets_jn	1599
ggsnApnDownlinkPacketsIpv6	1599
ggsnApnFailedAuthActivation	1599
ggsnApnGiSignalingInBytes	1599
ggsnApnGiSignalingInPackets	1600
ggsnApnGiSignalingOutBytes	1600
ggsnApnGiSignalingOutPackets	1600
ggsnApnIdleTimeOutDeactivation	1600
ggsnApnNbrOfTftFilters	1601
ggsnApnNghbrSolicitationRcv	1601
ggsnApnNghbrSolicitationRsp	1601
ggsnApnRouterSolicitationRcv	1601
ggsnApnRouterSolicitationRsp	1601
ggsnApnSessTimeoutDeactivation	1602
ggsnApnUplinkBytes	1602
ggsnApnUplinkBytes_jn	1602
ggsnApnUplinkBytesIpv6	1603
ggsnApnUplinkDrops	1603
ggsnApnUplinkDrops_jn	1603
ggsnApnUplinkDropsIpv6	1603
ggsnApnUplinkPackets	1604
ggsnApnUplinkPackets_jn	1604
ggsnApnUplinkPacketsIpv6	1604
GGSNRelease	1604
GGSNRelease	1605
nbrOfActivePdpContPerApnAtGgsn	1605
succActPdpContDynPerApnOfGgsn	1605
succActPdpContextPerApnOfGgsn	1605
succDeactPdpContByGgsnPerApn	1606
succDeactPdpContPerApnOfGgsn	1606

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

BGPPeerIP Primitive Calculations	1606
GRAPHmultiLineSeparator	1606
NUMDAYS	1606
NUMHOURS	1606
UnknownEnterpriseField	1607
BGPPeerIP Peg Counts	1607
bgpPeerInTotalMessages_30	1607
bgpPeerInUpdates	1607
bgpPeerOutTotalMessages_30	1607
bgpPeerOutUpdates	1608
collectionPeriod	1608
GSNRelease	1608
PeerFsmEstablishedTransitions	1608
PeerInUpdateElapsedTime	1609
BillingGtw Primitive Calculations	1609
GRAPHmultiLineSeparator	1609
NUMDAYS	1609
NUMHOURS	1609
UnknownEnterpriseField	1609
BillingGtw Peg Counts	1610
collectionPeriod	1610
ggsnAcctDataRecTransReqCncl	1610
ggsnAcctDataRecTransReqSent	1610
ggsnAcctDataRecTransReqSentDup	1611
ggsnAcctDataRecTransRespRcvd	1611
ggsnAcctPartialRecordGenerated	1611
ggsnAcctRedirectionReqRcvd	1612
ggsnAcctRedirectionRespSent	1612
Release_BillingGtw	1612
BSSGP Primitive Calculations	1612
GRAPHmultiLineSeparator	1612
NUMDAYS	1613
NUMHOURS	1613
BSSGP Peg Counts	1613
bssgpDownlinkOctets	1613
bssgpDownlinkPackets	1613
bssgpDownlinkPacketsSignalling	1614
bssgpStatusBvcUnknown	1614
bssgpUplinkOctets	1614
bssgpUplinkPackets	1615
bssgpUplinkPacketsSignalling	1615
collectionPeriod	1615
Card Primitive Calculations	1615
atma15IfInPkts	1616
atma15IfOutPkts	1616
AverageCapGTP_CPICthisGGSN	1616
CardGOS	1616
DatagramFragFailRate_GSN	1616
DatagramInAddressFailRate_GSN	1616
DatagramInHeaderFailRate_GSN	1616

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

DatagramNoRoutesFailRate_GSN	1617
GRAPHmultiLineSeparator	1617
lcmplnMsgsSucc	1617
NUMDAYS	1617
NUMHOURS	1617
pDatagramFragFail	1617
pDatagramInAddrFailRate	1618
pDatagramInHdrFail	1618
pDatagramNoRoutesFail	1618
pToIDatagramsFail	1618
TotalCapGTP_CPICThisGGSN	1618
TotlpDatagramsFailRate_GSN	1618
UnknownEnterpriseField	1619
Card Peg Counts	1619
atma5CRCErrors	1619
atma5IfInDiscards	1619
atma5IfInErrors	1619
atma5IfInOctets	1620
atma5IfInUcastPkts	1620
atma5IfOutDiscards	1620
atma5IfOutErrors	1621
atma5IfOutOctets	1621
atma5IfOutUcastPkts	1621
atma5OverSizedSDUs	1622
atmlCellDrops	1622
atmlCLPCells	1622
atmlCongestionErrors	1623
atmlCPIErrors	1623
atmlInvalidCells	1623
atmlVpiVciLookupErrors	1624
atmplLineAIS	1624
atmplLineOverheadBIPErrors	1624
atmplLineRDI	1625
atmplLineREI	1625
atmplLOF	1625
atmplLOP	1626
atmplLOS	1626
atmplOOF	1626
atmplPathAIS	1627
atmplPathOverheadBIPErrors	1627
atmplPathRDI	1627
atmplPathREI	1628
atmplSectionOverheadBIPErrors	1628
atmtclCorrectableHECs	1628
atmtclEgressCells	1629
atmtclIngressCells	1629
atmtclOCDEvents	1629
atmtclUncorrectableHECs	1630
bgpPeerInTotalMessages_21	1630
bgpPeerOutTotalMessages_21	1630
collectionPeriod	1631

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

collectionPeriod_SNMP_GGSN	1631
ethInErrors_Unit0	1631
ethInErrors_Unit1	1631
ethInErrorsBUF_Unit0	1632
ethInErrorsBUF_Unit1	1632
ethInErrorsCE_Unit0	1632
ethInErrorsCE_Unit1	1633
ethInErrorsCLBLK_Unit0	1633
ethInErrorsCLBLK_Unit1	1633
ethInErrorsCS_Unit0	1633
ethInErrorsCS_Unit1	1634
ethInErrorsFF_Unit0	1634
ethInErrorsFF_Unit1	1634
ethInErrorsMBLK_Unit0	1635
ethInErrorsMBLK_Unit1	1635
ethInErrorsRF_Unit0	1635
ethInErrorsRF_Unit1	1636
ethInErrorsTL_Unit0	1636
ethInErrorsTL_Unit1	1636
ethInMF_Unit0	1637
ethInMF_Unit1	1637
ethInPkts_Unit0	1637
ethInPkts_Unit1	1638
ethInUcastPkts_Unit0	1638
ethInUcastPkts_Unit1	1638
ethOutErrorOWN_Unit0	1639
ethOutErrorOWN_Unit1	1639
ethOutErrors_Unit0	1639
ethOutErrors_Unit1	1639
ethOutErrorsBUF_Unit0	1640
ethOutErrorsBUF_Unit1	1640
ethOutErrorsEC_Unit0	1640
ethOutErrorsEC_Unit1	1641
ethOutErrorsLC_Unit0	1641
ethOutErrorsLC_Unit1	1641
ethOutErrorsLO_Unit0	1642
ethOutErrorsLO_Unit1	1642
ethOutErrorsNC_Unit0	1642
ethOutErrorsNC_Unit1	1643
ethOutErrorsTO_Unit0	1643
ethOutErrorsTO_Unit1	1643
ethOutErrorsTXD_Unit0	1643
ethOutErrorsTXD_Unit1	1644
ethOutErrorsUF_Unit0	1644
ethOutErrorsUF_Unit1	1644
ethOutPkts_Unit0	1645
ethOutPkts_Unit1	1645
ethOutUcastPkts_Unit0	1645
ethOutUcastPkts_Unit1	1646
filterIpsecPacketsOnCPU	1646
filterIpsecPacketsOnCPU_IPSecFilter	1646

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

filterIpsecPacketsOnCPU_normalFilter	1647
filterPacketsAllowedOnCPU	1647
filterPacketsAllowedOnCPU_IPSecFilter	1647
filterPacketsAllowedOnCPU_normalFilter	1648
filterPacketsDeniedOnCPU	1648
filterPacketsDeniedOnCPU_IPSecFilter	1648
filterPacketsDeniedOnCPU_normalFilter	1648
ggsnGtpcControlLoad	1649
ggsnGtpcControlPacketDrops	1649
ggsnGtpcCpuUsage	1649
ggsnGtpcMemory	1650
ggsnGtpcMemoryUsed	1650
ggsnGtpcNbrOfActivePdpContexts	1650
ggsnGtpcNbrOfActPdpContextIpv6	1650
ggsnGtpcPdpCapacity	1650
ggsnGtpcRole	1651
ggsnGtpcStatus	1651
ggsnGtpcTftFilterDepthMax	1651
ggsnGtpcTftFilterDepthMean	1652
ggsnGtpuCpuUsage	1652
ggsnGtpuMemory	1652
ggsnGtpuMemoryUsed	1652
ggsnGtpuNbrOfActivePdpContexts	1653
ggsnGtpuNbrOfActPdpContextIpv6	1653
ggsnGtpuPayloadLoad	1653
ggsnGtpuPdpCapacity	1653
ggsnGtpuRole	1653
ggsnGtpuStatus	1654
ggsnGtpuUserDownlinkDrops	1654
ggsnGtpuUserUplinkDrops	1654
ggsnPicNbrOfActivePdpContexts	1654
GSNRelease	1655
icmpInDestUnreachs	1655
icmpInEchoReps	1655
icmpInEchos	1655
icmpInErrors	1656
icmpInMsgs	1656
icmpInParmProbs	1656
icmpInRedirects	1657
icmpInTimeExcds	1657
icmpOutDestUnreach	1657
icmpOutEchoReps	1658
icmpOutEchos	1658
icmpOutMsgs	1658
icmpOutParmProbs	1659
icmpOutRedirects	1659
icmpOutTimeExcds	1659
interfaceType	1659
ipForwDatagrams	1660
ipFragCreates	1660
ipFragFails	1660

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ipFragOKs	1661
ipInAddrErrors	1661
ipInHdrErrors	1661
ipInReceives	1662
ipOutNoRoutes	1662
ipReasmFails	1662
ipReasmOKs	1663
ipReasmReqds	1663
ipsecInCorrectPackets	1663
ipsecIssIllegalSpi	1664
ipsecIssInOkPackets	1664
ipsecIssMd5Mismatch	1664
ipsecIssOutOkPackets	1665
ipsecIssSha1Mismatch	1665
ipsecWaPacketsProcessed	1665
ospfExternLsaCount	1666
ospfOriginateNewLsas	1666
ospfRxNewLsas_R21	1666
OutErrors	1667
Release_SNMP_GGSN	1667
Connection Primitive Calculations	1667
GRAPHmultiLineSeparator	1667
NUMDAYS	1667
NUMHOURS	1668
UnknownEnterpriseField	1668
Connection Peg Counts	1668
collectionPeriod	1668
filterPackets_in_30	1668
filterPackets_out_30	1668
filterPacketsAllowed_in_30	1669
filterPacketsAllowed_out_30	1669
filterPacketsDenied_in_30	1669
filterPacketsDenied_out_30	1670
GSNRelease	1670
DestClass Primitive Calculations	1670
GRAPHmultiLineSeparator	1670
NUMDAYS	1670
NUMHOURS	1670
UnknownEnterpriseField	1671
DestClass Peg Counts	1671
collectionPeriod	1671
GSNRelease	1671
jnxDcuStatsBytes	1671
jnxDcuStatsPackets	1672
DHCP Primitive Calculations	1672
GRAPHmultiLineSeparator	1672
NUMDAYS	1672
NUMHOURS	1672
UnknownEnterpriseField	1673
DHCP Peg Counts	1673

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

collectionPeriod	1673
ggsnDhcpClientRepliesDiscarded	1673
ggsnDhcpClientRepliesReceived	1673
ggsnDhcpClientRequestsSent	1674
Release_Dhcp	1674
DLCI Primitive Calculations	1674
DLCIGOS	1674
Gb_FR_TrafficRX	1674
Gb_FR_TrafficTX	1675
GRAPHmultiLineSeparator	1675
MaxCIR	1675
MinCIR	1675
NUMDAYS	1675
NUMHOURS	1675
pDisEligRx	1676
pDisEligTx	1676
UnknownEnterpriseField	1676
UtilizationRX	1676
UtilizationTX	1676
DLCI Peg Counts	1676
collectionPeriod	1676
frMfeRxDiscards	1677
frMfeRxFragmentedPDUs	1677
frMfeRxFragments	1677
frMfeRxPDUs	1678
frMfeRxReassemblyMismatch	1678
frMfeRxReassemblyTooBig	1678
frMfeTxBlocked	1678
frMfeTxDiscards	1679
frMfeTxFragmentedPDUs	1679
frMfeTxFragmentErrors	1679
frMfeTxFragments	1680
frMfeTxPDUs	1680
frPvcCirHiWat	1680
frPvcCirLoWat	1681
frPvcRxBECNs	1681
frPvcRxBytes	1681
frPvcRxDe	1682
frPvcRxFECNs	1682
frPvcRxFrames	1682
frPvcRxStops	1682
frPvcTxBytes	1683
frPvcTxDe	1683
frPvcTxFrames	1683
frPvcTxStops	1684
GSNRelease	1684
ForwardClass Primitive Calculations	1684
GRAPHmultiLineSeparator	1684
NUMDAYS	1684
NUMHOURS	1685

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

UnknownEnterpriseField	1685
ForwardClass Peg Counts	1685
collectionPeriod	1685
GSNRelease	1685
jnxCosIfqHpNonTcpRedDropByteRate	1686
jnxCosIfqHpNonTcpRedDropBytes	1686
jnxCosIfqHpNonTcpRedDropPktRate	1686
jnxCosIfqHpNonTcpRedDropPkts	1687
jnxCosIfqHpTcpRedDropByteRate	1687
jnxCosIfqHpTcpRedDropBytes	1687
jnxCosIfqHpTcpRedDropPktRate	1688
jnxCosIfqHpTcpRedDropPkts	1688
jnxCosIfqLpNonTcpRedDropByteRate	1688
jnxCosIfqLpNonTcpRedDropBytes	1689
jnxCosIfqLpNonTcpRedDropPktRate	1689
jnxCosIfqLpNonTcpRedDropPkts	1689
jnxCosIfqLpTcpRedDropByteRate	1690
jnxCosIfqLpTcpRedDropBytes	1690
jnxCosIfqLpTcpRedDropPktRate	1690
jnxCosIfqLpTcpRedDropPkts	1691
jnxCosIfqQedByteRate	1691
jnxCosIfqQedBytes	1691
jnxCosIfqQedPktRate	1692
jnxCosIfqQedPkts	1692
jnxCosIfqTailDropPktRate	1692
jnxCosIfqTailDropPkts	1693
jnxCosIfqTotalRedDropByteRate	1693
jnxCosIfqTotalRedDropBytes	1693
jnxCosIfqTotalRedDropPktRate	1694
jnxCosIfqTotalRedDropPkts	1694
jnxCosIfqTxedByteRate	1694
jnxCosIfqTxedBytes	1695
jnxCosIfqTxedPktRate	1695
jnxCosIfqTxedPkts	1695
GSN Available Data Fields	1696
CGSN_AvailableDataPct	1696
GGSN_CLI_AvailableDataPct	1696
GGSN_Snmp_AvailableDataPct	1696
SGSN_AvailableDataPct	1696
GSN Primitive Calculations	1696
attActPdpContextMSPerSgsn	1696
attDeactPdpContextGgsnPerSgsn	1696
attDeactPdpContextMsPerSgsn	1696
AverageCapGTP_CPICallGGSN	1697
ethInErrors	1697
ethInErrorsBUF	1697
ethInErrorsCE	1697
ethInErrorsCLBLK	1697
ethInErrorsCS	1697
ethInErrorsFF	1697

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ethInErrorsMBLK	1698
ethInErrorsRF	1698
ethInErrorsTL	1698
ethInMF	1698
ethInPkts	1698
ethOutErrorOWN	1698
ethOutErrors	1698
ethOutErrorsBUF	1699
ethOutErrorsEC	1699
ethOutErrorsLC	1699
ethOutErrorsLO	1699
ethOutErrorsNC	1699
ethOutErrorsTO	1699
ethOutErrorsTXD	1699
ethOutErrorsUF	1700
ethOutPkts	1700
filterAllowedPacketsOnSlot	1700
filterDeniedPacketsOnSlot	1700
filterIpsecPacketsOnSlot	1700
gprsMmSgsnUnsuccessfulPagingProcedures	1700
GRAPHmultiLineSeparator	1700
icmpInDestUnreachs	1701
icmpInDestUnreachsRate	1701
icmpInEchoReps	1701
icmpInEchos	1701
icmpInErrorRate	1701
icmpInErrors	1701
icmpInMsgs	1701
icmpInMsgsSucc	1702
icmpInParmProbs	1702
icmpInRedirects	1702
icmpInTimeExcds	1702
icmpOutDestUnreachs	1702
icmpOutDestUnreachsRate	1702
icmpOutEchoReps	1703
icmpOutEchos	1703
icmpOutErrors	1703
icmpOutErrorsRate	1703
icmpOutMsgs	1703
icmpOutParmProbs	1703
icmpOutRedirects	1703
icmpOutTimeExcds	1704
ipForwDatagrams	1704
ipForwDatagramsRate	1704
ipFragCreates	1704
ipFragFails	1704
ipFragFailsRate	1704
ipFragOKs	1705
ipInAddrErrors	1705
ipInAddrErrorsRate	1705
ipInDeliversRate	1705

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ipInDiscardsRate	1705
ipInHdrErrors	1705
ipInHdrErrorsRate	1706
ipInReceives	1706
ipOutDiscardsRate	1706
ipOutNoRoutes	1706
ipReasmFails	1706
ipReasmFailsRate	1706
ipReasmOKs	1707
ipReasmReqds	1707
ipsecInCorrectPackets	1707
ipsecIssIllegalSpi	1707
ipsecIssInOkPackets	1707
ipsecIssMd5Mismatch	1707
ipsecIssOutOkPackets	1707
ipsecIssSha1Mismatch	1708
ipsecWaPacketsProcessed	1708
MMAttGprsAttachU	1708
MMAttGprsDetachMsU	1708
MMAttGprsDetachSgsnU	1708
MMAttInterSgsnRaUpdateU	1708
MMAttIntraSgsnRaUpdateU	1708
MMNbrActAttachedSubG	1709
MMSuccInterSgsnRaUpdateU	1709
MMUnsuccAttachCC14G	1709
MMUnsuccAttachCC8G	1709
NUMDAYS	1709
NUMHOURS	1709
ospfExternLsaCount	1709
ospfOriginateNewLsas	1710
ospfRxNewLsas	1710
Payload_DL_SGSN	1710
Payload_UL_SGSN	1710
pdropPackRatedownAllSGSN	1710
pdropPackRateupAllSGSN	1710
pGGSNPacketSuccessRate	1711
pGprsAttchFail	1711
pGTPaveragePacketSizeUpLink	1711
pGTPaverPackSizeDownlinkGGSN	1711
pGTPpacketDropRateDownlink	1711
pGTPpacketDropRateUpLink	1711
pInterSgsnRoutUpdFailpSgsn	1712
pIntraSgsnRoutUpdFailpSgsn	1712
pPagingFailpSgsn	1712
pPdpActReFailpGGSN	1712
pPdpContextEstabFailpGGSN	1712
pPdpContextEstabFailpSGSN	1713
pPdpContextModFailpSGSN	1713
pPdpContextUpdFailpGGSN	1713
pPdpDeActReFailpGGSN	1713
pPdpSelfDeActReFailpGGSN	1713

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pDdpSessionManReFailpGGSN	1714
pDdpUpdReFailpGGSN	1714
pSessionManSuccessRateGGSN	1714
pTotalAPNpacketSuccessRate	1714
pTotalAPNSuccessRate	1714
SECAttIdentityReqImsiG	1715
SECAttReqAuthSetsSentToHlrBySGSN	1715
SECEmptyResponsesForAuthSetsFromHlr	1715
SECSuccIdentityReqImsiG	1715
SECSuccReqAuthSetsSentToHlrBySGSN	1715
SMAttActPdpContextDynG	1715
SMNbrActivePdpPerSgsnG	1715
SMNbrActPdpContextG	1716
SMSuccActPdpContextDynG	1716
SMSuccActPdpContextG	1716
SMSuccModPdpContextSgsnG	1716
SuccActPdpContextDynRate	1716
SuccActPdpContextRate	1716
succDeactPdpContextGsgnPerSgsn	1717
succDeactPdpContextMsPerSgsn	1717
SuccGprsAttachRate	1717
SuccIntraSgsnRaUpdate_Rate	1717
TotalCapGTP_CPICallGGSN	1717
UnknownEnterpriseField	1717
GSN Peg Counts	1717
attActPdpContextDynMSPerSgsn	1718
attAuthInSgsn	1718
attCombiAttach	1718
attCombiDetachMs	1719
attGprsAttach	1719
attGprsAttachUmts	1719
attGprsAttachVisitor	1720
attGprsDetachMs	1720
attGprsDetachMsUmts	1720
attGprsDetachSgsn	1721
attGprsDetachSgsnUmts	1721
attIdentityReq	1721
attImsiAttach	1722
attImsiDetachMS	1722
attInterSgsnRaUpdate	1722
attInterSgsnRaUpdateUmts	1723
attInterSgsnRaUpdateVisitor	1723
attIntraSgsnRaUpdate	1723
attIntraSgsnRaUpdateUmts	1724
attPacketSwitchingPaging	1724
attPacketSwitchingPagingUmts	1724
attReqAuthSetsSentToHlrBySgsn	1725
bssgpAttResumeProc	1725
bssgpAttSuspendProc	1725
CAMAttCamelDialogues	1725
CAMAttCamelDialoguesU	1726

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CAMFailDialoguesScf	1726
CAMFailDialoguesScfU	1726
CAMFailDialoguesSsf	1727
CAMFailDialoguesSsfU	1727
collectionPeriod	1727
collectionPeriod_GGSN	1728
collectionPeriod_SNMP_GGSN	1728
discardedAttachMsError	1728
discardedCombiAttach	1729
discardedCombiRaUpdate	1729
discardedDetach	1729
discardedGprsAttach	1730
discardedPayloadPacket	1730
discardedRaUpdate	1730
DiscardedSccpConnectInd	1731
discardedSessionMgmt	1731
downlinkSndcpNpduSent	1731
downlinkSndcpOctetSent	1731
emptyResponsesForAuthSetsFromHlr	1732
errLicFramesDetectedBySgsn	1732
ggsn_auth_failed	1732
ggsn_ctrl_pkt_drops	1733
ggsn_da_unavail	1733
ggsn_Dlink_Bytes	1733
ggsn_Dlink_Drops	1734
ggsn_Dlink_Packets	1734
ggsn_err_ind_rcvd	1734
ggsn_err_ind_trans	1735
ggsn_invalid_req_format	1735
ggsn_mem_unavail	1735
ggsn_mndt_ie_invalid	1735
ggsn_mndt_ie_missing	1736
ggsn_opt_ie_invalid	1736
ggsn_pdp_cr_resp_trans	1736
ggsn_pdp_creation_failed	1737
ggsn_pdp_deact_failed	1737
ggsn_pdp_del_idle_sv	1737
ggsn_pdp_del_req_trans	1738
ggsn_pdp_del_res_rcvd	1738
ggsn_pdp_del_res_trans	1738
ggsn_pdp_del_user_cmd	1739
ggsn_pdp_upd_req_rcvd	1739
ggsn_pdp_upd_req_trans	1739
ggsn_pdp_upd_res_rcvd	1740
ggsn_pdp_upd_res_trans	1740
ggsn_pdp_update_failed	1740
ggsn_Pkt_filter_semantic_err	1741
ggsn_Pkt_filter_syntax_err	1741
ggsn_ref_notexist	1741
ggsn_req_accpt	1742
ggsn_req_received	1742

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ggsn_req_transmitted	1742
ggsn_res_not_avail	1743
ggsn_res_received	1743
ggsn_res_transmitted	1743
ggsn_serv_unsupported	1743
ggsn_sgsn_pdp_cr_req_rcvd	1744
ggsn_sgsn_pdp_del_req_rcvd	1744
ggsn_sys_failed	1744
ggsn_tft_semantic_err	1745
ggsn_tft_syntax_err	1745
ggsn_unkwn_apn	1745
ggsn_unkwn_pdp_add_or_type	1746
ggsn_Uplink_Bytes	1746
ggsn_Uplink_Drops	1746
ggsn_Uplink_Packets	1747
ggsn_ver_unsupp_received	1747
ggsn_ver_unsupp_transmitted	1747
ggsn_ver_unsupported	1748
ggsnAlarmCriticalNumber	1748
ggsnAlarmMajorNumber	1748
ggsnAlarmMinorNumber	1748
ggsnAlarmNumber	1749
ggsnAlarmUnknownNumber	1749
ggsnAlarmWarningNumber	1749
ggsnAttemptedActivation	1750
ggsnAttemptedActivationIpv6	1750
ggsnAttemptedDeactivation	1750
ggsnAttemptedDeactivation_jn	1751
ggsnAttemptedSecondaryActivation	1751
ggsnAttemptedSelfDeactivation	1751
ggsnAttemptedTimeDeactivation	1752
ggsnAttemptedUpdate	1752
ggsnAttemptedUpdate_jn	1752
ggsnAttmpManualDeactivation	1753
ggsnCompletedActivation	1753
ggsnCompletedActivationIpv6	1753
ggsnCompletedDeactivation	1753
ggsnCompletedManualDeactivation	1754
ggsnCompletedSecondaryActivation	1754
ggsnCompletedSelfDeactivation	1754
ggsnCompletedTimeDeactivation	1755
ggsnCompletedUpdate	1755
ggsnControlLoad	1755
ggsnDownlinkBytesIpv6	1756
ggsnDownlinkDropsBytes	1756
ggsnDownlinkDropsIpv6	1756
ggsnDownlinkPacketsIpv6	1756
ggsnFailedActivation	1757
ggsnGtpControlPacketDrops	1757
ggsnGtpDownlinkBytes	1757
ggsnGtpDownlinkBytes_jn	1758

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ggsnGtpDownlinkPackets	1758
ggsnGtpDownlinkPackets_in	1758
ggsnGtpEchoReqReceived	1759
ggsnGtpEchoReqSent	1759
ggsnGtpEchoRespReceived	1759
ggsnGtpEchoRespSent	1759
ggsnGtpErrInvalidReqFormatDel	1760
ggsnGtpErrInvalidReqFormatUpd	1760
ggsnGtpErrMndtryIEInvalidDel	1760
ggsnGtpErrMndtryIEInvalidUpd	1760
ggsnGtpErrMndtryIEMissingDel	1760
ggsnGtpErrMndtryIEMissingUpd	1761
ggsnGtpErrOptionalIEInvDel	1761
ggsnGtpErrOptionalIEInvUpd	1761
ggsnGtpErrorApnAccessDenied	1761
ggsnGtpErrorApnUnknown	1761
ggsnGtpErrorAuthenticationFailed	1762
ggsnGtpErrorDynAddrUnavailable	1762
ggsnGtpErrorIndicationReceived	1762
ggsnGtpErrorIndicationSent	1763
ggsnGtpErrorInvalidRequestFormat	1763
ggsnGtpErrorMandatoryIEInvalid	1763
ggsnGtpErrorMandatoryIEMissing	1764
ggsnGtpErrorMemoryUnAvailable	1764
ggsnGtpErrorOptionalIEInvalid	1764
ggsnGtpErrorPackFiltSemantError	1764
ggsnGtpErrorPackFiltSyntaxError	1765
ggsnGtpErrorPDPAddrUnknown	1765
ggsnGtpErrorPdpWithoutTft	1765
ggsnGtpErrorReferenceInexistent	1766
ggsnGtpErrorResourceUnavailable	1766
ggsnGtpErrorServiceUnsupported	1766
ggsnGtpErrorSystemFailure	1767
ggsnGtpErrorSystemFailureUpd	1767
ggsnGtpErrorTFTSemanticError	1767
ggsnGtpErrorTFTSyntaxError	1767
ggsnGtpErrorTFTSyntaxErrorUpd	1768
ggsnGtpErrPackFiltSemantErUpd	1768
ggsnGtpErrPackFiltSyntaxErUpd	1768
ggsnGtpErrReferInexistentDel	1768
ggsnGtpErrRefInexistentUpd	1768
ggsnGtpErrTFTSemanticErrorUpd	1769
ggsnGtpNbrOfCreatedTunnels	1769
ggsnGtpNbrOfTunnels	1769
ggsnGtpPdpCreateReqReceived	1769
ggsnGtpPdpCreateRespSent	1770
ggsnGtpPdpDeleteReqReceived	1770
ggsnGtpPdpDeleteReqSent	1770
ggsnGtpPdpDeleteRespReceived	1771
ggsnGtpPdpDeleteRespSent	1771
ggsnGtpPdpUpdateReqReceived	1771

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ggsnGtpPdpUpdateReqSent	1772
ggsnGtpPdpUpdateRespReceived	1772
ggsnGtpPdpUpdateRespSent	1772
ggsnGtpPrAlreadyFulfilled	1773
ggsnGtpPrDataRecTransferReceived	1773
ggsnGtpPrDataRecTransferSent	1773
ggsnGtpPrDecodingError	1773
ggsnGtpPrDupPacketFulfilled	1774
ggsnGtpPrEchoReqReceived	1774
ggsnGtpPrEchoRequestsSent	1774
ggsnGtpPrEchoRespReceived	1775
ggsnGtpPrEchoRespSent	1775
ggsnGtpPrErrorMandatoryIEInvalid	1775
ggsnGtpPrErrorMandatoryIEMissing	1776
ggsnGtpPrErrorOptionalIEInvalid	1776
ggsnGtpPrErrorRefInexistent	1776
ggsnGtpPrimeDataRecTransfReqTransm	1777
ggsnGtpPrimeDataRecTransfResRcvd	1777
ggsnGtpPrimeEchoReqRcvd	1777
ggsnGtpPrimeEchoReqTransm	1778
ggsnGtpPrimeEchoResRcvd	1778
ggsnGtpPrimeEchoResTransm	1778
ggsnGtpPrimeMndtIE_invalid	1779
ggsnGtpPrimeMndtIE_missing	1779
ggsnGtpPrimeNodeAliveReqRcvd	1779
ggsnGtpPrimeNodeAliveReqTransm	1779
ggsnGtpPrimeNodeAliveResRcvd	1780
ggsnGtpPrimeNodeAliveResTransm	1780
ggsnGtpPrimeOptIE_invalid	1780
ggsnGtpPrimeRedReqRcvd	1781
ggsnGtpPrimeRedReqTransm	1781
ggsnGtpPrimeRedResRcvd	1781
ggsnGtpPrimeRedResTransm	1782
ggsnGtpPrimeVerUnsupPktRcvd	1782
ggsnGtpPrimeVerUnsupPktTransm	1782
ggsnGtpPrInvalidMessageFormat	1783
ggsnGtpPrNodeAliveReqReceived	1783
ggsnGtpPrNodeAliveReqSent	1783
ggsnGtpPrNodeAliveRespReceived	1784
ggsnGtpPrNodeAliveRespSent	1784
ggsnGtpPrNoResource	1784
ggsnGtpPrRedirectReqReceived	1784
ggsnGtpPrRedirectReqSent	1785
ggsnGtpPrRedirectRespReceived	1785
ggsnGtpPrRedirectRespSent	1785
ggsnGtpPrRequestAccepted	1786
ggsnGtpPrRequestUnfulfilled	1786
ggsnGtpPrServiceUnsupported	1786
ggsnGtpPrSndDataRecordPackets	1787
ggsnGtpPrSystemFailure	1787
ggsnGtpPrVersionUnsupported	1787

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ggsnGtpPrVerUnsupPacketsReceived	1787
ggsnGtpPrVerUnsupPacketsSent	1788
ggsnGtpRequestsAccepted	1788
ggsnGtpUplinkBytes	1788
ggsnGtpUplinkBytes_in	1789
ggsnGtpUplinkPackets	1789
ggsnGtpUplinkPackets_in	1789
ggsnGtpVerUnsupPacketsReceived	1790
ggsnGtpVerUnsupPacketsSent	1790
ggsnNbrOfActivePdpContexts	1790
ggsnNbrOfActivePdpContexts_in	1791
ggsnNbrOfActPdpContextsIpv6	1791
ggsnNbrOfSubscribers	1791
ggsnNbrOfSubscribersMean	1791
ggsnNbrOfTftFilters	1792
ggsnNeighborSolicitationRcv	1792
ggsnNeighborSolicitationRsp	1792
ggsnPayloadLoad	1792
ggsnRouterSolicitationRcv	1793
ggsnRouterSolicitationRsp	1793
ggsnSessionTimeoutDeactivation	1793
ggsnUplinkBytesIpv6	1793
ggsnUplinkDropsBytes	1793
ggsnUplinkDropsIpv6	1794
ggsnUplinkPacketsIpv6	1794
gprsMmSgsnAttachRequests	1794
gprsMmSgsnCurrentlyAttachedSubscribers	1795
gprsMmSgsnInterRoutingAreaUpdateRequests	1795
gprsMmSgsnIntraRoutingAreaUpdateRequests	1795
gprsMmSgsnPagingProcedures	1795
gprsMmSgsnRejectedByAdmissionControl	1796
gprsMmSgsnSuccessfulPagingProcedures	1796
gprsMmSgsnUnsuccAttachRequestsCC14	1796
gprsMmSgsnUnsuccessfulAttachRequests	1797
gprsMmSgsnUnsuccessfulAttachRequestsCC8	1797
gprsMmSgsnUnsuccInterRoutingAreaUpdReq	1797
gprsMmSgsnUnsuccIntraRoutingAreaUpdReq	1798
gprsMmUnsuccessfulPagingProcedures	1798
gprsSmGgsnActivePdpContexts	1798
gprsSmGgsnPdpDeletions	1799
gprsSmGgsnSuccessfulPdpCreations	1799
gprsSmGgsnSuccessfulPdpUpdatings	1799
gprsSmGgsnUnsuccessfulPdpCreations	1800
gprsSmGgsnUnsuccessfulPdpUpdatings	1800
gprsSmSgsnDeactivations	1800
gprsSmSgsnSuccessfulActivations	1801
gprsSmSgsnSuccessfulModifications	1801
gprsSmSgsnTotalActive	1801
gprsSmSgsnUnsuccActivCC27_28_29_32_33	1802
gprsSmSgsnUnsuccessfulActivations	1802
gprsSmSgsnUnsuccessfulModifications	1802

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GSN_Type	1802
gsnAutomaticConnectionRestarts	1803
gsnManualConnectionRestarts	1803
gsnOloadProtectionGlobalIgnoredNewConn	1803
gsnOloadProtectionIgnoredExistingConn	1804
gsnOloadProtectionIgnoredNewConn	1804
gsnOverloadProtectionSs7MessageReject	1804
GSNRelease	1805
GSNRelease_GGSN	1805
GTPGtpInDataOctlu	1805
GTPGtpInDataPktlu	1805
GTPGtpuOutDataOctlu	1806
GTPGtpuOutDataPktlu	1806
GTPInDataOctGn	1806
GTPInDataPktGn	1807
GTPMBMSInDataPktGn	1807
GTPMBMSOutDataPktlu	1807
GTPOutDataOctGn	1808
GTPOutDataPktGn	1808
GTPPayloadgtpuErrorPkt	1808
HHOAttInterSGSNNew	1809
HHOAttInterSGSNOld	1809
HHOAttIntraSGSN	1809
HHOAttOptIntraSGSN	1810
HHOSuccInterSGSNNew	1810
HHOSuccInterSGSNOld	1810
HHOSuccIntraSGSN	1811
HHOSuccOptIntraSGSN	1811
IRATHOAttInterSGSNNewGsmUmts	1811
IRATHOAttInterSGSNNewUmtsGsm	1812
IRATHOAttInterSGSNOldGsmUmts	1812
IRATHOAttInterSGSNOldUmtsGsm	1812
IRATHOAttIntraSGSNGsmUmts	1813
IRATHOAttIntraSGSNUmtsGsm	1813
IRATHOSuccInterSGSNNewGsmUmts	1814
IRATHOSuccInterSGSNNewUmtsGsm	1814
IRATHOSuccInterSGSNOldGsmUmts	1814
IRATHOSuccInterSGSNOldUmtsGsm	1815
IRATHOSuccIntraSGSNGsmUmts	1815
IRATHOSuccIntraSGSNUmtsGsm	1815
ISYSCAttIntraSgsnGsmUmtsRau	1816
ISYSCAttIntraSgsnUmtsGsmRau	1816
ISYSCSuccIntraSgsnGsmUmtsRau	1816
ISYSCSuccIntraSgsnUmtsGsmRau	1817
ISYSCUnsuccIntraSgsnGsmUmtsRauCSPSCoord	1817
jnxggsnDownlinkBytes	1817
jnxggsnDownlinkDrops	1818
jnxggsnDownlinkPackets	1818
jnxggsnUplinkBytes	1818
jnxggsnUplinkDrops	1819
jnxggsnUplinkPackets	1819

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxicmpInAddrMask	1819
jnxicmpInAddrMaskReps	1819
jnxicmpInDestUnreachs	1820
jnxicmpInEchoReps	1820
jnxicmpInEchos	1820
jnxicmpInErrors	1821
jnxicmpInMsgs	1821
jnxicmpInParmProbs	1821
jnxicmpInRedirects	1822
jnxicmpInSrcQuenches	1822
jnxicmpInTimeExcds	1822
jnxicmpInTimestampReps	1823
jnxicmpInTimestamps	1823
jnxicmpOutAddrMaskReps	1823
jnxicmpOutAddrMasks	1824
jnxicmpOutDestUnreachs	1824
jnxicmpOutEchoReps	1824
jnxicmpOutEchos	1824
jnxicmpOutErrors	1825
jnxicmpOutMsgs	1825
jnxicmpOutParmProbs	1825
jnxicmpOutRedirects	1826
jnxicmpOutSrcQuenches	1826
jnxicmpOutTimeExcds	1826
jnxicmpOutTimestampReps	1827
jnxicmpOutTimestamps	1827
jnxlcmpv6StatsAddrUnreachs	1827
jnxlcmpv6StatsAdminProhibits	1828
jnxlcmpv6StatsBadChecksums	1828
jnxlcmpv6StatsBadCodes	1828
jnxlcmpv6StatsBadHdrFields	1829
jnxlcmpv6StatsBadLenth	1829
jnxlcmpv6StatsBadNextHdrs	1829
jnxlcmpv6StatsBadOptions	1829
jnxlcmpv6StatsBeyondScopes	1830
jnxlcmpv6StatsCantErrors	1830
jnxlcmpv6StatsErrors	1830
jnxlcmpv6StatsExceedReasms	1831
jnxlcmpv6StatsExceedTrans	1831
jnxlcmpv6StatsExcessNDOptions	1831
jnxlcmpv6StatsInEchoReplies	1832
jnxlcmpv6StatsInEchoReqs	1832
jnxlcmpv6StatsInMLDones	1832
jnxlcmpv6StatsInMLQueries	1833
jnxlcmpv6StatsInMLReports	1833
jnxlcmpv6StatsInNbrAdvs	1833
jnxlcmpv6StatsInNbrSolicits	1833
jnxlcmpv6StatsInNIReplies	1834
jnxlcmpv6StatsInNIReqs	1834
jnxlcmpv6StatsInParamProbs	1834
jnxlcmpv6StatsInPktTooBigs	1835

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxlcmpv6StatsInRedirects	1835
jnxlcmpv6StatsInRtrAdvs	1835
jnxlcmpv6StatsInRtrRenumbers	1836
jnxlcmpv6StatsInRtrSolicits	1836
jnxlcmpv6StatsInTimeExceeds	1836
jnxlcmpv6StatsInUnreachables	1837
jnxlcmpv6StatsNoRoutes	1837
jnxlcmpv6StatsOthers	1837
jnxlcmpv6StatsOutEchoReplies	1837
jnxlcmpv6StatsOutEchoReqs	1838
jnxlcmpv6StatsOutMLDones	1838
jnxlcmpv6StatsOutMLQueries	1838
jnxlcmpv6StatsOutMLReports	1839
jnxlcmpv6StatsOutNbrAdvs	1839
jnxlcmpv6StatsOutNbrSolicits	1839
jnxlcmpv6StatsOutNIREplies	1840
jnxlcmpv6StatsOutNIReqs	1840
jnxlcmpv6StatsOutParamProbs	1840
jnxlcmpv6StatsOutPktTooBigs	1841
jnxlcmpv6StatsOutRedirects	1841
jnxlcmpv6StatsOutRtrAdvs	1841
jnxlcmpv6StatsOutRtrRenumbers	1841
jnxlcmpv6StatsOutRtrSolicits	1842
jnxlcmpv6StatsOutTimeExceeds	1842
jnxlcmpv6StatsOutUnreachables	1842
jnxlcmpv6StatsPortUnreachs	1843
jnxlcmpv6StatsRedirects	1843
jnxlcmpv6StatsResponses	1843
jnxlcmpv6StatsTooBigs	1844
jnxlcmpv6StatsTooFreqs	1844
jnxlcmpv6StatsTooShorts	1844
jnxipForwDatagrams	1845
jnxipFragCreates	1845
jnxipFragFails	1845
jnxipFragOKs	1846
jnxipInAddrErrors	1846
jnxipInDelivers	1846
jnxipInDiscards	1847
jnxipInHdrErrors	1847
jnxipInReceives	1847
jnxipInUnknownProtos	1848
jnxipOutDiscards	1848
jnxipOutNoRoutes	1848
jnxipOutRequests	1849
jnxipReasmFails	1849
jnxipReasmOKs	1849
jnxipReasmReqs	1850
jnxipReasmTimeout	1850
jnxipRoutingDiscards	1850
jnxlvp6StatsBadOptions	1851
jnxlvp6StatsBadScopes	1851

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxIpv6StatsBadVersions	1851
jnxIpv6StatsDelivers	1851
jnxIpv6StatsForwards	1852
jnxIpv6StatsForwCacheHits	1852
jnxIpv6StatsForwCacheMisses	1852
jnxIpv6StatsFragDrops	1853
jnxIpv6StatsFragments	1853
jnxIpv6StatsFragOverFlows	1853
jnxIpv6StatsFragTimeOuts	1854
jnxIpv6StatsHdrNotContinuous	1854
jnxIpv6StatsInAhs	1854
jnxIpv6StatsInDestOpts	1855
jnxIpv6StatsInEspS	1855
jnxIpv6StatsInEthS	1855
jnxIpv6StatsInFragS	1855
jnxIpv6StatsInHopByHops	1856
jnxIpv6StatsInIcmpS	1856
jnxIpv6StatsInIcmpv6S	1856
jnxIpv6StatsInIdps	1857
jnxIpv6StatsInIgmpS	1857
jnxIpv6StatsInIps	1857
jnxIpv6StatsInIpv6S	1858
jnxIpv6StatsInIsolps	1858
jnxIpv6StatsInNoNhs	1858
jnxIpv6StatsInOspfS	1859
jnxIpv6StatsInPims	1859
jnxIpv6StatsInRoutings	1859
jnxIpv6StatsInTcps	1859
jnxIpv6StatsInTps	1860
jnxIpv6StatsInUdps	1860
jnxIpv6StatsMCNoDests	1860
jnxIpv6StatsNoGifs	1861
jnxIpv6StatsNotMcastMembers	1861
jnxIpv6StatsOptRateDrops	1861
jnxIpv6StatsOutDeadNextHops	1862
jnxIpv6StatsOutDiscards	1862
jnxIpv6StatsOutFragCreates	1862
jnxIpv6StatsOutFragFails	1863
jnxIpv6StatsOutFragOKs	1863
jnxIpv6StatsOutNoRoutes	1863
jnxIpv6StatsOutRequests	1864
jnxIpv6StatsRawOuts	1864
jnxIpv6StatsReasmOKs	1864
jnxIpv6StatsReceives	1864
jnxIpv6StatsRedirects	1865
jnxIpv6StatsTooManyHdrs	1865
jnxIpv6StatsTooShorts	1865
jnxIpv6StatsTooSmalls	1866
jnxIpv6StatsUnreachables	1866
jnxOperationBuffer	1866
jnxOperationCPU	1867

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxOperationDRAMsize	1867
jnxOperationHeap	1867
jnxOperationISR	1868
jnxOperationMemory	1868
jnxOperationTemp	1868
MMAttachedLostG	1869
MMAttachedLostU	1869
MMAttAttachAcceptNon3GPPCompliantG	1869
MMAttAttachAcceptNon3GPPCompliantU	1870
MMAttAuthCiphReqNon3GPPCompliantG	1870
MMAttAuthCiphReqNon3GPPCompliantU	1870
MMAttChangeOfLocalTimeG	1871
MMAttChangeOfLocalTimeU	1871
MMAttCombiInterSgsnRaUpdateG	1871
MMAttCombiIntraSgsnRaUpdateG	1872
MMAttDetachInactiveSubG	1872
MMAttImsiCombiInterSgsnRAUpdaG	1872
MMAttImsiCombiIntraSgsnRAUpdaG	1872
MMAttNormalIntraSgsnRaUpdateG	1873
MMAttRauAcceptNon3GPPCompliantG	1873
MMAttRauAcceptNon3GPPCompliantU	1873
MMAttServiceReq	1874
MMAttServiceReqData	1874
MMAttServiceReqDataU	1874
MMAttServiceRequestU	1874
MMNbrActAttachedSubRAG	1875
MMNbrActAttachedSubRAU	1875
MMNbrActAttachedSubU	1875
MMNbrCamelSubG	1876
MMNbrCamelSubU	1876
MMNbrDetachedInactiveSubG	1876
MMNbrHomeSubG	1877
MMNbrHomeSubU	1877
MMNbrSubPmmConnected	1877
MMNbrVisitingForeignG	1878
MMNbrVisitingForeignU	1878
MMNbrVisitingNatSubG	1878
MMNbrVisitingNatSubU	1878
MMSuccCombiInterSgsnRaUpdateG	1879
MMSuccCombiIntraSgsnRaUpdateG	1879
MMSuccGprsDetachSgsnG	1879
MMSuccGprsDetachSgsnU	1879
MMSuccNormalIntraSgsnRaUpdateG	1880
MMSuccNormalIntraSgsnRaUpdateU	1880
MMUnsuccAttachCC11G	1880
MMUnsuccAttachCC11U	1881
MMUnsuccAttachCC13G	1881
MMUnsuccAttachCC13U	1881
MMUnsuccAttachCC14U	1881
MMUnsuccAttachCC15G	1882
MMUnsuccAttachCC15U	1882

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MMUnsuccAttachCC17G	1882
MMUnsuccAttachCC17U	1882
MMUnsuccAttachCC22G	1883
MMUnsuccAttachCC22U	1883
MMUnsuccAttachCC7G	1883
MMUnsuccAttachCC7U	1884
MMUnsuccAttachCC8U	1884
MMUnsuccAttachCSPSCoordU	1884
MMUnsuccInterSgsnRauCC10G	1884
MMUnsuccInterSgsnRauCC10U	1885
MMUnsuccInterSgsnRauCC14G	1885
MMUnsuccInterSgsnRauCC14U	1885
MMUnsuccInterSgsnRauCC15G	1886
MMUnsuccInterSgsnRauCC15U	1886
MMUnsuccInterSgsnRauCC17G	1887
MMUnsuccInterSgsnRauCC17U	1887
MMUnsuccInterSgsnRauCC9G	1887
MMUnsuccInterSgsnRauCC9U	1888
MMUnsuccInterSgsnRauG	1888
MMUnsuccInterSgsnRauU	1888
MMUnsuccIntraSgsnRauCC14G	1889
MMUnsuccIntraSgsnRauCC14U	1889
MMUnsuccIntraSgsnRauCC15G	1889
MMUnsuccIntraSgsnRauCC15U	1890
MMUnsuccIntraSgsnRauCC17G	1890
MMUnsuccIntraSgsnRauCC17U	1890
MMUnsuccIntraSgsnRAUCSPSCoordU	1891
MMUnsuccIntraSgsnRauG	1891
MMUnsuccIntraSgsnRauU	1891
MMUnsuccISRAUCSPSCoordU	1892
MMUnsuccServiceReq	1892
MMUnsuccServiceReqU	1892
nbrLlcFramesReceived	1893
nbrLlcFramesSent	1893
nbrOfAttachedSub	1893
nbrOfBlackAnswerInSgsn	1894
nbrOfCheckIMEIRequest	1894
nbrOfGreyAnswerInSgsn	1894
nbrOfSubReady	1895
nbrOfSubStandby	1895
nbrOfUnknownAnswerInSgsn	1895
nbrOfWhiteAnswerInSgsn	1896
nbrSubsWithActivePdpInSgsn	1896
NoOfRunDialTot	1896
NoOfRunOpTot	1897
PDPcreations	1897
pmReadingsPerHour	1897
pmReadingsPerOccasion	1898
QoSAttActConvsPdpContextG	1898
QoSAttActConvsPdpContextU	1898
QoSAttActInteractPdpContextG	1899

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

QoSAttActInteractPdpContextU	1899
QoSAttActStreamingPdpContextG	1899
QoSAttActStreamingPdpContextU	1900
QoSCurrentGuaranteedBitRate	1900
QoSCurrentGuaranteedBitRateG	1900
QoSCurrentGuaranteedBitRateU	1901
QoSDLBackgroundPktDiscardedG	1901
QoSDLBackgroundPktDiscardedU	1901
QoSDLBackgroundPktForwardedG	1902
QoSDLBackgroundPktForwardedU	1902
QoSDLConvsPktDiscardedG	1902
QoSDLConvsPktDiscardedU	1903
QoSDLConvsPktForwardedG	1903
QoSDLConvsPktForwardedU	1903
QoSDLInteractivePktDiscardedG	1903
QoSDLInteractivePktDiscardedU	1904
QoSDLInteractivePktForwardedG	1904
QoSDLInteractivePktForwardedU	1904
QoSDLStreamingPktDiscardedG	1905
QoSDLStreamingPktDiscardedU	1905
QoSDLStreamingPktForwardedG	1905
QoSDLStreamingPktForwardedU	1906
QoS GuaBitRateDowngradesG	1906
QoS GuaBitRateDowngradesU	1906
QoS GuaranteedBitRateAttemptsG	1907
QoS GuaranteedBitRateAttemptsU	1907
QoSNbrActConvsPdpContextG	1908
QoSNbrActConvsPdpContextU	1908
QoSNbrActInteractPdpContextG	1908
QoSNbrActInteractPdpContextU	1908
QoSNbrActStreamingPdpContextG	1909
QoSNbrActStreamingPdpContextU	1909
QoSULBackgroundPktForwarded	1909
QoSULConvsPktForwarded	1910
QoSULInteractivePktForwarded	1910
QoSULStreamingPktForwarded	1910
Release_SNMP_GGSN	1911
RELOCAtInterSGSN	1911
RELOCAtInterSGSNNew	1911
RELOCAtIntraSGSN	1912
RELOCFailInterSGSNInt	1912
RELOCFailIntraSGSNInt	1912
RELOCSuccInterSGSN	1913
RELOCSuccInterSGSNNew	1913
RELOCSuccIntraSGSN	1913
S_PayloadgtpuErrorPkt	1913
S_PayloadgtpuInDataOctGn	1914
S_PayloadgtpuInDataOctlu	1914
S_PayloadgtpuInDataPktGn	1914
S_PayloadgtpuInDataPktlu	1914
S_PayloadgtpuOutDataOctGn	1914

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

S_PayloadgtpuOutDataOctlu	1914
S_PayloadgtpuOutDataPktGn	1915
S_PayloadgtpuOutDataPktlu	1915
SECAuthProcsSgsnSimG	1915
SECAuthProcsSgsnSimU	1915
SECAuthProcsSgsnUsimG	1915
SECAuthProcsSgsnUsimU	1916
SECAuthContextRequestToPsgsnG	1916
SECAuthContextRequestToPsgsnU	1916
SECAuthIdentityReqImsiU	1917
SECAuthSecMode	1917
SECAuthPOAuthFailSgsnG	1917
SECAuthPOAuthFailSgsnU	1917
SECSuccAuthProcsSgsnSimG	1918
SECSuccAuthProcsSgsnSimU	1918
SECSuccAuthProcsSgsnUsimG	1918
SECSuccAuthProcsSgsnUsimU	1918
SECSuccContextRequestToPsgsnG	1919
SECSuccContextRequestToPsgsnU	1919
SECSuccIdentityReqImsiU	1919
SECSuccSecMode	1920
Shared	1920
SMAuthActPdpContextDynU	1920
SMAuthActPdpContextG	1921
SMAuthActPdpContextSgsnHomeG	1921
SMAuthActPdpContextSgsnHomeU	1921
SMAuthActPdpContextU	1922
SMAuthActSecondPdpContextG	1922
SMAuthActSecondPdpContextU	1922
SMAuthDeactPdpContextGgsnG	1923
SMAuthDeactPdpContextGgsnU	1923
SMAuthDeactPdpContextMsG	1923
SMAuthDeactPdpContextMsU	1924
SMAuthDeactPdpContextSgsnCC38G	1924
SMAuthDeactPdpContextSgsnCC38U	1924
SMAuthDeactPdpContextSgsnCC39G	1925
SMAuthDeactPdpContextSgsnCC39U	1925
SMAuthDeactPdpContextSgsnG	1925
SMAuthDeactPdpContextSgsnU	1926
SMAuthModPdpContextMsG	1926
SMAuthModPdpContextMsU	1926
SMAuthModPdpContextSgsnG	1927
SMAuthModPdpContextSgsnU	1927
SMAuthRabAssignment	1927
SMAuthRabModPS	1928
SMAuthUpdPdpContextGgsnG	1928
SMAuthUpdPdpContextGgsnU	1928
SMAuthUpdPdpContextSgsnG	1929
SMAuthUpdPdpContextSgsnU	1929
SMNbrActivePdpPerSgsnU	1929
SMNbrActPdpContextU	1929

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SMNbrActSessions	1930
SMPdpContextsLostG	1930
SMPdpContextsLostU	1930
SMSAttMoPSG	1931
SMSAttMoPSU	1931
SMSAttMtPSG	1931
SMSAttMtPSU	1932
SMSSuccMoPSG	1932
SMSSuccMoPSU	1932
SMSSuccMtPSG	1932
SMSSuccMtPSU	1933
SMSuccActPdpContextDynU	1933
SMSuccActPdpContextSgsnHomeG	1933
SMSuccActPdpContextSgsnHomeU	1933
SMSuccActPdpContextU	1934
SMSuccActSecondPdpContextG	1934
SMSuccActSecondPdpContextU	1934
SMSuccDeactPdpContextGgsnG	1935
SMSuccDeactPdpContextGgsnU	1935
SMSuccDeactPdpContextMsG	1935
SMSuccDeactPdpContextMsU	1936
SMSuccDeactPdpContextSgsnG	1936
SMSuccDeactPdpContextSgsnU	1936
SMSuccModPdpContextMsG	1937
SMSuccModPdpContextMsU	1937
SMSuccModPdpContextSgsnU	1937
SMSuccRabAssignment	1938
SMSuccUpdPdpContextGgsnG	1938
SMSuccUpdPdpContextGgsnU	1938
SMSuccUpdPdpContextSgsnG	1939
SMSuccUpdPdpContextSgsnU	1939
SMUnsuccActPdpContextCamelG	1939
SMUnsuccActPdpContextCamelU	1940
SMUnsuccActPdpContextCC26G	1940
SMUnsuccActPdpContextCC26U	1940
SMUnsuccActPdpContextCC27_28G	1941
SMUnsuccActPdpContextCC27_28U	1941
SMUnsuccActPdpContextCC29G	1941
SMUnsuccActPdpContextCC29U	1942
SMUnsuccActPdpContextCC32_33G	1942
SMUnsuccActPdpContextCC32_33U	1942
SMUnsuccActPdpContextCC38G	1943
SMUnsuccActPdpContextCC38U	1943
SMUnsuccActPdpContextU	1943
ss7_ADPI_MessageOrigUDT	1944
ss7_ADPI_MessageOrigXUDT	1944
ss7_ADPI_MessageTermUDT	1944
SS7_ADPI_MessageTermXUDT	1944
ss7_ADPI_MSUDiscardError	1944
ss7_ADPI_ProtocolErrorComp	1944
ss7_ADPI_ProtocolErrorTraA	1944

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ss7_ADP1_ProtocolErrorTraD	1945
ss7_ADP1_SLFailure	1945
ss7_ADP1_SLRestoration	1945
ss7_ADP1_SPlnaccess	1945
ss7_ADP1_TCMessageReceive	1945
ss7_ADP1_TCMessageSent	1945
ss7AssocAviForUP	1946
ss7AssocUnaviForUP	1946
ss7MessageDiscardedOPCScreening	1946
ss7MessageOrigUDT	1947
ss7MessageOrigXUDT	1947
ss7MessageTermUDT	1947
ss7MessageTermXUDT	1947
ss7MSUDiscardError	1948
ss7ProtocolErrorComp	1948
ss7ProtocolErrorTraA	1948
ss7ProtocolErrorTraD	1949
ss7SLFailure	1949
ss7SLRestoration	1949
ss7SPlnaccess	1950
ss7TCMessageReceive	1950
ss7TCMessageSent	1950
subscribersInTransitionalState	1951
succActPdpContextDynMsPerSgsn	1951
succActPdpContextMSPerSgsn	1951
succAuthInSgsn	1952
succCombiAttach	1952
succGprsAttach	1952
succGprsAttachUmts	1953
succGprsAttachVisitor	1953
succGprsDetachSgsn	1953
succGprsDetachSgsnUmts	1954
succIdentityReq	1954
succImsiAttach	1954
succInterSgsnRaUpdate	1955
succInterSgsnRaUpdateUmts	1955
succInterSgsnRaUpdateVisitor	1955
succIntraSgsnRaUpdate	1956
succIntraSgsnRaUpdateUmts	1956
succPacketSwitchingPagingUmts	1956
succReqAuthSetsHlr	1957
unsuccGprsAttachUmts	1957
unsuccPacketSwitchingPaging	1957
unsuccPacketSwitchPagingUmts	1958
uplinkSndcpNpduReceived	1958
uplinkSndcpOctetReceivedMode	1958
GSN_MM_Index Primitive Calculations	1959
GRAPHmultiLineSeparator	1959
NUMDAYS	1959
NUMHOURS	1959
UnknownEnterpriseField	1959

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GSN_MM_Index Peg Counts	1959
AttGprsAttachG	1959
AttGprsDetachMsG	1960
AttInterSgsnRaUpdateG	1960
AttIntraSgsnRaUpdateG	1960
collectionPeriod	1961
GSNRelease	1961
MMAttCombiInterSgsnRaUpdateG	1961
MMAttCombiIntraSgsnRaUpdateG	1961
MMAttGprsAttachU	1962
MMAttGprsDetachMsU	1962
MMAttGprsDetachSgsnG	1962
MMAttGprsDetachSgsnU	1962
MMAttImsiCombiInterSgsnRAUpdaG	1963
MMAttImsiCombiIntraSgsnRAUpdaG	1963
MMAttInterSgsnRaUpdateU	1963
MMAttIntraSgsnRaUpdateU	1963
MMAttNormalIntraSgsnRaUpdateG	1964
MMAttNormalIntraSgsnRaUpdateU	1964
MMAttPsPagingProcGb	1964
MMAttPsPagingProclu	1965
MMNbrActAttachedSubRAG	1965
MMNbrActAttachedSubRAU	1965
MMSuccCombiInterSgsnRaUpdateG	1966
MMSuccCombiIntraSgsnRaUpdateG	1966
MMSuccFirstPsPagingGb	1966
MMSuccGprsAttachU	1967
MMSuccGprsDetachSgsnG	1967
MMSuccGprsDetachSgsnU	1967
MMSuccInterSgsnRaUpdateU	1968
MMSuccIntraSgsnRaUpdateU	1968
MMSuccNormalIntraSgsnRaUpdateG	1968
MMSuccNormalIntraSgsnRaUpdateU	1969
MMSuccPsPagingProcGb	1969
MMSuccPsPagingProclu	1969
SuccGprsAttachG	1969
SuccInterSgsnRaUpdateG	1970
SuccIntraSgsnRaUpdateG	1970
GSN_OvrProtect Primitive Calculations	1970
GRAPHmultiLineSeparator	1970
NUMDAYS	1971
NUMHOURS	1971
UnknownEnterpriseField	1971
GSN_OvrProtect Peg Counts	1971
collectionPeriod	1971
gsnOverloadProtectionSs7MessageReject	1971
GSNRelease	1972
GSN_SM_Index Primitive Calculations	1972
GRAPHmultiLineSeparator	1972
NUMDAYS	1972

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	1972
GSM_SM_Index Peg Counts	1972
collectionPeriod	1972
GSNRelease	1973
SMAttActPdpContextRaG	1973
SMSuccActPdpContextRaG	1973
GSNTType Primitive Calculations	1974
GRAPHmultiLineSeparator	1974
NUMDAYS	1974
NUMHOURS	1974
UnknownEnterpriseField	1974
Interface Primitive Calculations	1974
ATMAAL5LenErrPkts	1974
ATMAAL5NoBufDropPktsRate	1975
ATMAAL5TimeoutPkts	1975
ATMAAL5VCQueueDropsPktsRate	1975
ATMAvgPktsSizeIn	1975
ATMAvgPktsSizeOut	1975
ATMHeaderCheckSeqCorrRate	1975
ATMHeaderCheckUnCorrErrRate	1976
ATMIdelCellRate	1976
ATMNoBufferOAMFailRate	1976
ATMoverrunFIFORecieveRate	1976
ATMoverrunFIFOTransmitRate	1976
ATMTotAAL5PacketsDropped	1976
ATMunderrunFIFORecieveRate	1977
ATMVCTailQueuePktDropRate	1977
ATMVirtuConnecFailRate	1977
GRAPHmultiLineSeparator	1977
IfAccuracy	1977
ifInDiscardRate	1977
ifInErrorsRate	1978
ifInPkts	1978
ifOutDiscardRate	1978
ifOutErrorsRate	1978
ifOutPkts	1978
InterfaceBalance_GSN	1978
InterfaceGOS	1979
InterfaceThrouputRx	1979
InterfaceThrouputRx_GSN	1979
InterfaceThrouputTx	1979
InterfaceThrouputTx_GSN	1979
NUMDAYS	1979
NUMHOURS	1980
PacketDiscardRate_GSN	1980
pInUtilization	1980
pPktDis	1980
pPktQue	1980
UnknownEnterpriseField	1980
Interface Peg Counts	1980

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

collectionPeriod	1981
collectionPeriod_SNMP_GGSN	1981
filterIpsecPackets_IPSecFilter_in_21	1981
filterIpsecPackets_IPSecFilter_out_21	1981
filterIpsecPackets_normalFilter_in_21	1982
filterIpsecPackets_normalFilter_out_21	1982
filterPacketsAllowed_IPSecFilter_in_21	1982
filterPacketsAllowed_IPSecFilter_out_21	1983
filterPacketsAllowed_normalFilter_in_21	1983
filterPacketsAllowed_normalFilter_out_21	1983
filterPacketsDenied_IPSecFilter_in_21	1983
filterPacketsDenied_IPSecFilter_out_21	1984
filterPacketsDenied_normalFilter_in_21	1984
filterPacketsDenied_normalFilter_out_21	1984
GSNRelease	1985
ifChassisChannel	1985
ifChassisLogicalUnit	1985
ifInDiscards	1986
ifInOctets	1986
ifInOctets_CPU2	1986
ifInOctets_CPU3	1986
ifInOctets_CPU4	1987
ifInPkts_CPU2	1987
ifInPkts_CPU3	1987
ifInPkts_CPU4	1988
ifInUcastPkts	1988
ifOutDiscards	1988
ifOutDiscards_CPU2	1989
ifOutDiscards_CPU3	1989
ifOutDiscards_CPU4	1989
ifOutOctets	1990
ifOutOctets_CPU2	1990
ifOutOctets_CPU3	1990
ifOutOctets_CPU4	1991
ifOutPkts_CPU2	1991
ifOutPkts_CPU3	1991
ifOutPkts_CPU4	1992
ifOutQlen	1992
ifOutQlen_CPU2	1992
ifOutQlen_CPU3	1992
ifOutQlen_CPU4	1993
ifOutUcastPkts	1993
jnxAtmIfCorrHCSErrs	1993
jnxAtmIfInBadCrcs	1994
jnxAtmIfInInvalidVCCells	1994
jnxAtmIfInLenErrPkts	1994
jnxAtmIfInNoBufDropPkts	1995
jnxAtmIfInNoBufferOAMCells	1995
jnxAtmIfInTimeoutPkts	1995
jnxAtmIfOutVCQueueDrops	1996
jnxAtmIfRxCellCount	1996

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxAtmIfRxCellFIFOOverRuns	1996
jnxAtmIfRxCellFIFOUnderRuns	1997
jnxAtmIfTxCellCount	1997
jnxAtmIfTxCellFIFOOverRuns	1997
jnxAtmIfTxIdleCellCount	1997
jnxAtmIfUncorrHCSErrs	1998
jnxifAdminStatus	1998
jnxifHCIn1SecRate	1998
jnxifHCInBroadcastPkts	1999
jnxifHCInMulticastPkts	1999
jnxifHCInOctets	1999
jnxifHCInUcastPkts	2000
jnxifHCOut1SecRate	2000
jnxifHCOutBroadcastPkts	2000
jnxifHCOutMulticastPkts	2001
jnxifHCOutOctets	2001
jnxifHCOutUcastPkts	2001
jnxifHighSpeed	2002
jnxifIn1SecOctets	2002
jnxifIn1SecPkts	2002
jnxifIn1SecRate	2003
jnxifInBroadcastPkts	2003
jnxifInDiscards	2003
jnxifInErrors	2004
jnxifInMulticastPkts	2004
jnxifInOctets	2004
jnxifInUcastPkts	2005
jnxifInUnknownProtos	2005
jnxifMtu	2005
jnxifOut1SecOctets	2006
jnxifOut1SecPkts	2006
jnxifOut1SecRate	2006
jnxifOutBroadcastPkts	2007
jnxifOutDiscards	2007
jnxifOutErrors	2007
jnxifOutMulticastPkts	2008
jnxifOutOctets	2008
jnxifOutQLen	2008
jnxifOutUcastPkts	2009
jnxifSpeed	2009
jnxPMonAllocPerSecond	2009
jnxPMonCurrentActiveFlows	2010
jnxPMonFlowAllocFailures	2010
jnxPMonFlowFreeFailures	2010
jnxPMonFlowMaxAlloc	2011
jnxPMonFlowTotalAlloc	2011
jnxPMonFlowTotalFree	2011
jnxPMonFreeListFailures	2011
jnxPMonFreePerSecond	2012
jnxPMonNoMemDrops	2012
jnxPMonNotIPDrops	2012

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxPMonNotIPv4Drops	2013
jnxPMonTenSecondAverageFlowBytes	2013
jnxPMonTenSecondAverageFlowPackets	2013
jnxPMonTooSmallDrops	2014
jnxPMonTotalFlows	2014
jnxPMonTotalFlowsAged	2014
jnxPMonTotalFlowsBytes	2015
jnxPMonTotalFlowsExpired	2015
jnxPMonTotalFlowsExported	2015
jnxPMonTotalFlowsPackets	2015
jnxPMonTotalFlowsPacketsExported	2016
jnxPMonTotalMemoryFree	2016
jnxPMonTotalMemoryUsed	2016
Release_SNMP_GGSN	2017
Net_BGPPeerIP Primitive Calculations	2017
GRAPHmultiLineSeparator	2017
NUMDAYS	2017
NUMHOURS	2017
Net_BGPPeerIP Peg Counts	2018
bgpPeerInTotalMessages	2018
bgpPeerInUpdates	2018
bgpPeerOutTotalMessages	2018
bgpPeerOutUpdates	2019
collectionPeriod	2019
GSNRelease	2019
PeerFsmEstablishedTransitions	2019
PeerInUpdateElapsedTime	2019
Net OSPF Area Primitive Calculations	2020
GRAPHmultiLineSeparator	2020
NUMDAYS	2020
NUMHOURS	2020
Net OSPF Area Peg Counts	2020
collectionPeriod	2020
GSNRelease	2021
ospfAreaBdrRtrCount	2021
ospfAreaLsaCount	2021
ospfAsBdrRtrCount	2021
ospfRxNewLsas	2022
ospfSpfRuns	2022
Net OSPF Interface Primitive Calculations	2022
GRAPHmultiLineSeparator	2022
NUMDAYS	2023
NUMHOURS	2023
Net OSPF Interface Peg Counts	2023
collectionPeriod	2023
GSNRelease	2023
ospfIfEvents	2023
Net OSPF NeighIP Primitive Calculations	2024
GRAPHmultiLineSeparator	2024
NUMDAYS	2024

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	2024
Net_OSPFNeighIP Peg Counts	2024
collectionPeriod	2024
GSNRelease	2024
ospfNbrEvents	2024
Network Primitive Calculations	2025
GRAPHmultiLineSeparator	2025
NUMDAYS	2025
NUMHOURS	2025
Network Peg Counts	2025
collectionPeriod	2025
GSNRelease	2025
ospfExternLsaCount	2026
ospfOriginateNewLsas	2026
ospfRxNewLsas	2026
NSVC Primitive Calculations	2027
GRAPHmultiLineSeparator	2027
NUMDAYS	2027
NUMHOURS	2027
NSVC Peg Counts	2027
collectionPeriod	2027
GSNRelease	2027
nsDownlinkPackets	2028
nsDownlinkPacketsDiscarded	2028
OSPFArea Primitive Calculations	2028
GRAPHmultiLineSeparator	2028
NUMDAYS	2028
NUMHOURS	2029
UnknownEnterpriseField	2029
OSPFArea Peg Counts	2029
collectionPeriod	2029
GSNRelease	2029
ospfAreaBdrRtrCount	2029
ospfAreaLsaCount	2030
ospfAsBdrRtrCount	2030
ospfRxNewLsas_R30	2030
ospfSpfRuns	2031
OSPFInterface Primitive Calculations	2031
GRAPHmultiLineSeparator	2031
NUMDAYS	2031
NUMHOURS	2031
UnknownEnterpriseField	2031
OSPFInterface Peg Counts	2032
collectionPeriod	2032
GSNRelease	2032
ospfIfEvents	2032
OSPFNeighIP Primitive Calculations	2032
GRAPHmultiLineSeparator	2032
NUMDAYS	2033
NUMHOURS	2033

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

UnknownEnterpriseField	2033
OSPFNeighIP Peg Counts	2033
collectionPeriod	2033
GSNRelease	2033
ospfNbrEvents	2033
PIU Primitive Calculations	2034
GRAPHmultiLineSeparator	2034
NUMDAYS	2034
NUMHOURS	2034
UnknownEnterpriseField	2034
PIU Peg Counts	2034
collectionPeriod	2034
gsnCpuUsageGPB	2035
gsnCpuUsageIB	2035
GSNRelease	2035
SYSgsnCpuUsage	2035
SYSgsnMemUsage	2036
RA_GSN Primitive Calculations	2036
GRAPHmultiLineSeparator	2036
NUMDAYS	2036
NUMHOURS	2037
SuccGprsAttachRate	2037
SuccIntraSgsnRaUpdate	2037
RA_GSN Peg Counts	2037
GSN_RELEASE	2037
MMAttGprsAttachU	2037
MMAttGprsDetachMsU	2037
MMAttGprsDetachSgsnU	2038
MMAttInterSgsnRaUpdateU	2038
MMAttIntraSgsnRaUpdateU	2038
MMSuccGprsAttachU	2038
MMSuccInterSgsnRaUpdateU	2039
MMSuccIntraSgsnRaUpdateU	2039
PERLENSEC	2039
SecAssoc Primitive Calculations	2039
GRAPHmultiLineSeparator	2039
NUMDAYS	2039
NUMHOURS	2040
UnknownEnterpriseField	2040
SecAssoc Peg Counts	2040
collectionPeriod	2040
GSNRelease	2040
ipsecSACurrentBytes_R30	2040
ipsecSAPacketsNotOk_R30	2041
ipsecSAPacketsOk_R30	2041
SecAssoc_Card Primitive Calculations	2041
GRAPHmultiLineSeparator	2041
NUMDAYS	2041
NUMHOURS	2042
UnknownEnterpriseField	2042

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SecAssoc_Card Peg Counts	2042
collectionPeriod	2042
GSNRelease	2042
ipsecSACurrentBytes_R21	2042
ipsecSAPacketsNotOk_R21	2043
ipsecSAPacketsOk_R21	2043
SGSN_GGSN Primitive Calculations	2043
GRAPHmultiLineSeparator	2043
NUMDAYS	2043
NUMHOURS	2044
pSGSN_GGSNdropPackRatedown	2044
pSGSN_GGSNdropPackRateup	2044
pSGSN_GGSNpacksizeDown	2044
pSGSN_GGSNpacksizeUp	2044
UnknownEnterpriseField	2044
SGSN_GGSN Peg Counts	2045
collectionPeriod	2045
collectionPeriod_SNMP_GGSN	2045
ggsnSgsn_err_ind_recvd	2045
ggsnSgsn_err_ind_trans	2046
ggsnSgsnDownlinkBytes	2046
ggsnSgsnDownlinkBytes_jn	2046
ggsnSgsnDownlinkDrops	2047
ggsnSgsnDownlinkDrops_jn	2047
ggsnSgsnDownlinkPackets	2047
ggsnSgsnDownlinkPackets_jn	2048
ggsnSgsnUplinkBytes	2048
ggsnSgsnUplinkBytes_jn	2048
ggsnSgsnUplinkDrops	2048
ggsnSgsnUplinkDrops_jn	2049
ggsnSgsnUplinkPackets	2049
ggsnSgsnUplinkPackets_jn	2049
GSNRelease	2050
Release_SNMP_GGSN	2050
SrcClass Primitive Calculations	2050
GRAPHmultiLineSeparator	2050
NUMDAYS	2051
NUMHOURS	2051
UnknownEnterpriseField	2051
SrcClass Peg Counts	2051
collectionPeriod	2051
GSNRelease	2051
jnxScuStatsBytes	2052
jnxScuStatsPackets	2052
SS7 Primitive Calculations	2053
GRAPHmultiLineSeparator	2053
NUMDAYS	2053
NUMHOURS	2053
UnknownEnterpriseField	2053
SS7 Peg Counts	2053

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

collectionPeriod	2053
GSMRelease	2053
NoOfCurrRunConnTot	2054
NoOfIncSegMes	2054
NoOfRunDialTot	2054
NoOfRunOpTot	2055
ss7MessageOrigCR	2055
ss7MessageOrigDT1	2055
ss7MessageOrigRLSD	2055
ss7MessageOrigUDT	2056
ss7MessageOrigXUDT	2056
ss7MessageTermCR	2056
ss7MessageTermDT1	2057
ss7MessageTermRLSD	2057
ss7MessageTermUDT	2057
ss7MessageTermXUDT	2057
ss7MSUDiscardError	2058
ss7ProtocolErrorComp	2058
ss7ProtocolErrorTraA	2058
ss7ProtocolErrorTraD	2059
ss7SLFailure	2059
ss7SLRestoration	2059
ss7SPInaccess	2060
ss7TCMessageReceive	2060
ss7TCMessageSent	2060
SS7Association Primitive Calculations	2060
GRAPHmultiLineSeparator	2061
NUMDAYS	2061
NUMHOURS	2061
UnknownEnterpriseField	2061
SS7Association Peg Counts	2061
ss7MessageReceivedPerAssociation	2061
ss7MessageSentPerAssociation	2062
ss7OctetsReceivedPerAssociation	2062
ss7OctetsSentPerAssociation	2062
SSN Primitive Calculations	2063
GRAPHmultiLineSeparator	2063
NUMDAYS	2063
NUMHOURS	2063
SSN Peg Counts	2063
ss7NoOfRunDialPerSsn	2063
ss7NoOfRunOpPerSsn	2063
System Primitive Calculations	2064
GRAPHmultiLineSeparator	2064
NUMDAYS	2064
NUMHOURS	2064
PercentActiveSubscribers	2064
PercentRegisteredSubscribers	2064
pTotalGGSNPacketSuccessRate	2064
pTotalSessionManSuccessRateGGSN	2065

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RegisteredInroamers	2065
RegisteredOutroamer	2065
SubscribersHLR	2065
SubscribersVLR	2065
TotalCellTCHTraffic	2065
TotalSwitchedTraffic	2065
TA_Name Primitive Calculations	2066
GRAPHmultiLineSeparator	2066
NUMDAYS	2066
NUMHOURS	2066
UnknownEnterpriseField	2066
TA_Name Peg Counts	2066
collectionPeriod	2066
greTaCurrentBytes	2067
greTaPacketsNotOk	2067
greTaPacketsOk	2067
GSNRelease	2067
TimeSlot Primitive Calculations	2068
GRAPHmultiLineSeparator	2068
NUMDAYS	2068
NUMHOURS	2068
TimeSlot Peg Counts	2068
ss7MessageReceivedPerLinkNb6	2068
ss7MessageSentPerLinkNb	2069
ss7OctetsReceivedPerLinkNb	2069
ss7OctetsSentPerLinkNb	2069
ss7SLFailureNb	2069
ss7SLRestorationNb	2070
Trunk Primitive Calculations	2070
GRAPHmultiLineSeparator	2070
NUMDAYS	2070
NUMHOURS	2070
PVCThroughputRx	2071
PVCThroughputTx	2071
TrunkGOS	2071
UnknownEnterpriseField	2071
Trunk Peg Counts	2071
collectionPeriod	2071
frWanLmiErrors	2071
frWanLmiTimeouts	2072
frWanLmiWanFlows	2072
frWanRxAsynchs	2072
frWanRxBytes	2073
frWanRxCLLMs	2073
frWanRxDrops	2073
frWanRxFrames	2074
frWanRxFullStat	2074
frWanRxInvDLCl	2074
frWanRxInvRq	2075
frWanRxLmiPolls	2075

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

frWanRxSeqOnly	2075
frWanRxTooBig	2075
frWanRxUnattDLCIs	2076
frWanTxBytes	2076
frWanTxDrops	2076
frWanTxFrames	2077
frWanTxFullStat	2077
frWanTxInvRq	2077
frWanTxLmiPolls	2078
frWanTxNoBuff	2078
frWanTxSeqOnly	2078
frWanTxStops	2079
frWanWanFlows	2079
GSNRelease	2079
hdlcRxErrAbort	2079
hdlcRxErrAbort_SubSlot3	2080
hdlcRxErrAbort_SubSlot4	2080
hdlcRxErrBusy	2080
hdlcRxErrBusy_SubSlot3	2081
hdlcRxErrBusy_SubSlot4	2081
hdlcRxErrCRC	2081
hdlcRxErrCRC_SubSlot3	2082
hdlcRxErrCRC_SubSlot4	2082
hdlcRxErrLackOfBufs	2082
hdlcRxErrLackOfBufs_SubSlot3	2083
hdlcRxErrLackOfBufs_SubSlot4	2083
hdlcRxErrMaxFrameLen	2083
hdlcRxErrMaxFrameLen_SubSlot3	2084
hdlcRxErrMaxFrameLen_SubSlot4	2084
hdlcRxErrNonOctetAlign	2084
hdlcRxErrNonOctetAlign_SubSlot3	2084
hdlcRxErrNonOctetAlign_SubSlot4	2085
hdlcRxErrQueue	2085
hdlcRxErrQueue_SubSlot3	2085
hdlcRxErrQueue_SubSlot4	2086
hdlcRxOctets	2086
hdlcRxOctets_SubSlot3	2086
hdlcRxOctets_SubSlot4	2087
hdlcRxOK	2087
hdlcRxOK_SubSlot3	2087
hdlcRxOK_SubSlot4	2088
hdlcTxOctets	2088
hdlcTxOctets_SubSlot3	2088
hdlcTxOctets_SubSlot4	2088
hdlcTxOK	2089
hdlcTxOK_SubSlot3	2089
hdlcTxOK_SubSlot4	2089
pppBytes	2090
pppErrors	2090
pppPackets	2090
pppPRcvd	2091

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pppIPSent	2091
pppOBytes	2091
pppOErrors	2092
pppOPackets	2092
VirtualChannel Primitive Calculations	2092
GRAPHmultiLineSeparator	2092
NUMDAYS	2092
NUMHOURS	2093
UnknownEnterpriseField	2093
VirtualChannel Peg Counts	2093
aal5VccCrcErrors	2093
aal5VccOverSizedSDUs	2093
aal5VccSarTimeOuts	2094
collectionPeriod	2094
GSNRelease	2094
jnxAtmVCConnType	2095
jnxAtmVCEncapsulation	2095
jnxAtmVCInBytes	2095
jnxAtmVCInOAMF5AISCCells	2096
jnxAtmVCInOAMF5LoopCells	2096
jnxAtmVCInOAMF5RDICells	2096
jnxAtmVCInPkts	2096
jnxAtmVCOAMDownCellCount	2097
jnxAtmVCOAMPeriod	2097
jnxAtmVCOAMUpCellCount	2097
jnxAtmVCOutBytes	2098
jnxAtmVCOutOAMF5LoopCells	2098
jnxAtmVCOutOAMF5RDICells	2098
jnxAtmVCOutPkts	2099
jnxAtmVCTailQueuePktDrops	2099
jnxAtmVCTotalDownTime	2099
ss7MessageReceivedPerLinkBb	2100
ss7MessageSentPerLinkBb5	2100
ss7OctetsReceivedPerLinkBb	2100
ss7OctetsSentPerLinkBb	2100
VirtualPath Primitive Calculations	2101
GRAPHmultiLineSeparator	2101
NUMDAYS	2101
NUMHOURS	2101
UnknownEnterpriseField	2101
VirtualPath Peg Counts	2101
collectionPeriod	2101
GSNRelease	2102
jnxAtmVpInBytes	2102
jnxAtmVpInOamF4AisCells	2102
jnxAtmVpInOamF4Cells	2103
jnxAtmVpInOamF4LoopCells	2103
jnxAtmVpInOamF4RdiCells	2103
jnxAtmVpInPkts	2104
jnxAtmVpOamDownCellCount	2104

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

jnxAtmVpOamPeriod	2104
jnxAtmVpOamUpCellCount	2105
jnxAtmVpOutBytes	2105
jnxAtmVpOutOamF4Cells	2105
jnxAtmVpOutOamF4LoopCells	2106
jnxAtmVpOutOamF4RdiCells	2106
jnxAtmVpOutPkts	2106
jnxAtmVpTotalDownTime	2106
7 RNC Traffic Entities	2109
8 RNC Traffic Fields	2117
Aal0TpVccTp_NodeB Primitive Calculations	2117
GRAPHmultiLineSeparator	2117
NUMDAYS	2117
NUMHOURS	2117
Aal0TpVccTp_NodeB Peg Counts	2117
PERLENSEC	2117
PERLENSEC_K	2118
pmBwErrBlocks	2118
pmBwLostCells	2118
pmBwMissinsCells	2119
pmFwErrBlocks	2119
pmFwLostCells	2119
pmFwMissinsCells	2120
pmLostBrCells	2120
pmLostFpmCells	2120
Aal0TpVccTp_RNC Primitive Calculations	2121
GRAPHmultiLineSeparator	2121
NUMDAYS	2121
NUMHOURS	2121
Aal0TpVccTp_RNC Peg Counts	2121
PERLENSEC	2121
PERLENSEC_K	2122
pmBwErrBlocks	2122
pmBwLostCells	2122
pmBwMissinsCells	2123
pmFwErrBlocks	2123
pmFwLostCells	2123
pmFwMissinsCells	2123
pmLostBrCells	2124
pmLostFpmCells	2124
Aal1TpVccTp_NodeB Primitive Calculations	2124
GRAPHmultiLineSeparator	2124
NUMDAYS	2125
NUMHOURS	2125
Aal1TpVccTp_NodeB Peg Counts	2125
NodeB_RELEASE	2125
PERLENSEC	2125
PERLENSEC_K	2126
pmBwErrBlocks	2126

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmBwLostCells	2126
pmBwMissinsCells	2126
pmFwErrBlocks	2127
pmFwLostCells	2127
pmFwMissinsCells	2127
pmLostBrCells	2128
pmLostFpmCells	2128
Aal2Ap_NodeB Primitive Calculations	2128
Aal2_SuccAll_NodeB	2128
Aal2_UnSuccIn_NodeB	2129
Aal2_UnSuccOut_NodeB	2129
GRAPHmultiLineSeparator	2129
NUMDAYS	2129
NUMHOURS	2129
Aal2Ap_NodeB Peg Counts	2129
NodeB_RELEASE	2129
PERLENSEC	2130
PERLENSEC_K	2130
pmExisOrigConns	2130
pmExisTermConns	2131
pmExisTransConns	2131
pmSuccInConnsRemote	2131
pmSuccInConnsRemoteQosClassA	2132
pmSuccInConnsRemoteQosClassB	2132
pmSuccInConnsRemoteQosClassC	2132
pmSuccInConnsRemoteQosClassD	2133
pmSuccOutConnsRemote	2133
pmSuccOutConnsRemoteQosClassA	2133
pmSuccOutConnsRemoteQosClassB	2134
pmSuccOutConnsRemoteQosClassC	2134
pmSuccOutConnsRemoteQosClassD	2134
pmUnRecMessages	2135
pmUnRecParams	2135
pmUnSuccInConnsLocal	2135
pmUnSuccInConnsLocalQosClassA	2136
pmUnSuccInConnsLocalQosClassB	2136
pmUnSuccInConnsLocalQosClassC	2136
pmUnSuccInConnsLocalQosClassD	2137
pmUnSuccInConnsRemote	2137
pmUnSuccInConnsRemoteQosClassA	2137
pmUnSuccInConnsRemoteQosClassB	2138
pmUnSuccInConnsRemoteQosClassC	2138
pmUnSuccInConnsRemoteQosClassD	2138
pmUnSuccOutConnsLocal	2139
pmUnSuccOutConnsLocalQosClassA	2139
pmUnSuccOutConnsLocalQosClassB	2139
pmUnSuccOutConnsLocalQosClassC	2140
pmUnSuccOutConnsLocalQosClassD	2140
pmUnSuccOutConnsRemote	2141
pmUnSuccOutConnsRemoteQosClassA	2141
pmUnSuccOutConnsRemoteQosClassB	2141

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUnSuccOutConnsRemoteQosClassC	2142
pmUnSuccOutConnsRemoteQosClassD	2142
Aal2Ap_RNC Primitive Calculations	2142
Aal2_SuccAll_RNC	2142
Aal2_UnSuccIn_RNC	2142
Aal2_UnSuccOut_RNC	2143
GRAPHmultiLineSeparator	2143
NUMDAYS	2143
NUMHOURS	2143
Aal2Ap_RNC Peg Counts	2143
PERLENSEC	2143
PERLENSEC_K	2144
pmExisOrigConns	2144
pmExisTermConns	2144
pmExisTransConns	2145
pmSuccInConnsRemote	2145
pmSuccInConnsRemoteQosClassA	2145
pmSuccInConnsRemoteQosClassB	2146
pmSuccInConnsRemoteQosClassC	2146
pmSuccInConnsRemoteQosClassD	2146
pmSuccOutConnsRemote	2147
pmSuccOutConnsRemoteQosClassA	2147
pmSuccOutConnsRemoteQosClassB	2147
pmSuccOutConnsRemoteQosClassC	2148
pmSuccOutConnsRemoteQosClassD	2148
pmUnRecMessages	2148
pmUnRecParams	2149
pmUnSuccInConnsLocal	2149
pmUnSuccInConnsLocalQosClassA	2149
pmUnSuccInConnsLocalQosClassB	2150
pmUnSuccInConnsLocalQosClassC	2150
pmUnSuccInConnsLocalQosClassD	2150
pmUnSuccInConnsRemote	2151
pmUnSuccInConnsRemoteQosClassA	2151
pmUnSuccInConnsRemoteQosClassB	2151
pmUnSuccInConnsRemoteQosClassC	2152
pmUnSuccInConnsRemoteQosClassD	2152
pmUnSuccOutConnsLocal	2152
pmUnSuccOutConnsLocalQosClassA	2153
pmUnSuccOutConnsLocalQosClassB	2153
pmUnSuccOutConnsLocalQosClassC	2153
pmUnSuccOutConnsLocalQosClassD	2154
pmUnSuccOutConnsRemote	2154
pmUnSuccOutConnsRemoteQosClassA	2154
pmUnSuccOutConnsRemoteQosClassB	2155
pmUnSuccOutConnsRemoteQosClassC	2155
pmUnSuccOutConnsRemoteQosClassD	2155
RNC_RELEASE	2156
Aal2PathVccTp_NodeB Primitive Calculations	2156
GRAPHmultiLineSeparator	2156

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	2156
NUMHOURS	2156
Aal2PathVccTp_NodeB Peg Counts	2156
PERLENSEC	2157
PERLENSEC_K	2157
pmBwErrBlocks	2157
pmBwLostCells	2158
pmBwMissinsCells	2158
pmDiscardedEgressCpsPackets	2158
pmEgressCpsPackets	2158
pmFwErrBlocks	2159
pmFwLostCells	2159
pmFwMissinsCells	2159
pmIngressCpsPackets	2160
pmLostBrCells	2160
pmLostFpmCells	2160
Aal2PathVccTp_RNC Primitive Calculations	2161
GRAPHmultiLineSeparator	2161
NUMDAYS	2161
NUMHOURS	2161
Aal2PathVccTp_RNC Peg Counts	2161
PERLENSEC	2161
PERLENSEC_K	2162
pmBwErrBlocks	2162
pmBwLostCells	2162
pmBwMissinsCells	2163
pmDiscardedEgressCpsPackets	2163
pmEgressCpsPackets	2163
pmFwErrBlocks	2163
pmFwLostCells	2164
pmFwMissinsCells	2164
pmIngressCpsPackets	2164
pmLostBrCells	2165
pmLostFpmCells	2165
Aal2Sp_NodeB Primitive Calculations	2165
GRAPHmultiLineSeparator	2165
NUMDAYS	2166
NUMHOURS	2166
Aal2Sp_NodeB Peg Counts	2166
NodeB_RELEASE	2166
PERLENSEC	2166
PERLENSEC_K	2166
pmUnsuccessfulConnsInternal	2167
Aal2Sp_RNC Primitive Calculations	2167
GRAPHmultiLineSeparator	2167
NUMDAYS	2167
NUMHOURS	2167
Aal2Sp_RNC Peg Counts	2168
PERLENSEC	2168
PERLENSEC_K	2168

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUnsuccessfulConnsInternal	2168
RNC_RELEASE	2169
Aal5TpVccTp_NodeB Primitive Calculations	2169
GRAPHmultiLineSeparator	2169
NUMDAYS	2169
NUMHOURS	2169
Aal5TpVccTp_NodeB Peg Counts	2169
PERLENSEC	2170
PERLENSEC_K	2170
pmBwErrBlocks	2170
pmBwLostCells	2171
pmBwMissinsCells	2171
pmFwErrBlocks	2171
pmFwLostCells	2171
pmFwMissinsCells	2172
pmLostBrCells	2172
pmLostFpmCells	2172
Aal5TpVccTp_RNC Primitive Calculations	2173
GRAPHmultiLineSeparator	2173
NUMDAYS	2173
NUMHOURS	2173
Aal5TpVccTp_RNC Peg Counts	2173
PERLENSEC	2173
PERLENSEC_K	2174
pmBwErrBlocks	2174
pmBwLostCells	2174
pmBwMissinsCells	2175
pmFwErrBlocks	2175
pmFwLostCells	2175
pmFwMissinsCells	2176
pmLostBrCells	2176
pmLostFpmCells	2176
Aich Primitive Calculations	2176
GRAPHmultiLineSeparator	2177
NUMDAYS	2177
NUMHOURS	2177
Aich Peg Counts	2177
NodeB_RELEASE	2177
PERLENSEC	2177
PERLENSEC_K	2178
pmNegativeMessages	2178
pmPositiveMessages	2178
AmrService Primitive Calculations	2179
GRAPHmultiLineSeparator	2179
NUMDAYS	2179
NUMHOURS	2179
p_Seizures_Sucess_Rate	2179
AmrService Peg Counts	2179
PERLENSEC	2179
pmForcedRelease	2180

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNormalRelease	2180
pmTotalSeizures	2180
pmUnsuccSeizures	2181
RNC_RELEASE	2181
AntennaBranch Primitive Calculations	2181
GRAPHmultiLineSeparator	2181
NUMDAYS	2181
NUMHOURS	2182
AntennaBranch Peg Counts	2182
NodeB_RELEASE	2182
PERLENSEC	2182
PERLENSEC_K	2182
pmNoOfPowLimSlots	2183
AtmPort_NodeB Primitive Calculations	2183
Avr_CellRate_Recieved_AtPort_NodeB	2183
Avr_CellRate_Transmitted_AtPort_NodeB	2183
GRAPHmultiLineSeparator	2183
NUMDAYS	2184
NUMHOURS	2184
AtmPort_NodeB Peg Counts	2184
NodeB_RELEASE	2184
PERLENSEC	2184
PERLENSEC_K	2184
pmReceivedAtmCells	2185
pmSecondsWithUnexp	2185
pmTransmittedAtmCells	2185
AtmPort_RNC Primitive Calculations	2186
Avr_CellRate_Recieved_AtPort_RNC	2186
Avr_CellRate_Transmitted_AtPort_RNC	2186
GRAPHmultiLineSeparator	2186
NUMDAYS	2186
NUMHOURS	2186
AtmPort_RNC Peg Counts	2187
PERLENSEC	2187
PERLENSEC_K	2187
pmReceivedAtmCells	2187
pmSecondsWithUnexp	2188
pmTransmittedAtmCells	2188
RNC_RELEASE	2188
Carrier Primitive Calculations	2188
GRAPHmultiLineSeparator	2189
k_CARR_PWR_DL_AVE	2189
NUMDAYS	2190
NUMHOURS	2190
pmAverageRssiP5MD_00	2190
pmAverageRssiP5MD_01	2190
pmAverageRssiP5MD_02	2191
pmAverageRssiP5MD_03	2191
pmAverageRssiP5MD_04	2191
pmAverageRssiP5MD_05	2191

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageRssiP5MD_06	2191
pmAverageRssiP5MD_07	2192
pmAverageRssiP5MD_08	2192
pmAverageRssiP5MD_09	2192
pmAverageRssiP5MD_10	2192
pmAverageRssiP5MD_11	2192
pmAverageRssiP5MD_12	2193
pmAverageRssiP5MD_13	2193
pmAverageRssiP5MD_14	2193
pmAverageRssiP5MD_15	2193
pmAverageRssiP5MD_16	2193
pmAverageRssiP5MD_17	2194
pmAverageRssiP5MD_18	2194
pmAverageRssiP5MD_19	2194
pmAverageRssiP5MD_20	2194
pmAverageRssiP5MD_21	2194
pmAverageRssiP5MD_22	2195
pmAverageRssiP5MD_23	2195
pmAverageRssiP5MD_24	2195
pmAverageRssiP5MD_25	2195
pmAverageRssiP5MD_26	2195
pmAverageRssiP5MD_27	2196
pmAverageRssiP5MD_28	2196
pmAverageRssiP5MD_29	2196
pmAverageRssiP5MD_30	2196
pmAverageRssiP5MD_31	2196
pmAverageRssiP5MD_32	2197
pmAverageRssiP5MD_33	2197
pmAverageRssiP5MD_34	2197
pmAverageRssiP5MD_35	2197
pmAverageRssiP5MD_36	2197
pmAverageRssiP5MD_37	2198
pmAverageRssiP5MD_38	2198
pmAverageRssiP5MD_39	2198
pmAverageRssiP5MD_40	2198
pmAverageRssiP5MD_41	2198
pmAverageRssiP5MD_42	2199
pmAverageRssiP5MD_43	2199
pmAverageRssiP5MD_44	2199
pmAverageRssiP5MD_45	2199
pmAverageRssiP5MD_46	2199
pmAverageRssiP5MD_47	2200
pmAverageRssiP5MD_48	2200
pmAverageRssiP5MD_49	2200
pmAverageRssiP5MD_50	2200
pmAverageRssiP5MD_51	2200
pmAverageRssiP5MD_52	2201
pmAverageRssiP5MD_53	2201
pmAverageRssiP5MD_54	2201
pmAverageRssiP5MD_55	2201
pmAverageRssiP5MD_56	2201

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageRssiP5MD_57	2202
pmAverageRssiP5MD_58	2202
pmAverageRssiP5MD_59	2202
pmAverageRssiP5MD_60	2202
pmTxCarrierPowerP5MD_02	2202
pmTxCarrierPowerP5MD_03	2202
pmTxCarrierPowerP5MD_04	2203
pmTxCarrierPowerP5MD_05	2203
pmTxCarrierPowerP5MD_06	2203
pmTxCarrierPowerP5MD_07	2203
pmTxCarrierPowerP5MD_08	2203
pmTxCarrierPowerP5MD_09	2203
pmTxCarrierPowerP5MD_10	2204
pmTxCarrierPowerP5MD_11	2204
pmTxCarrierPowerP5MD_12	2204
pmTxCarrierPowerP5MD_13	2204
pmTxCarrierPowerP5MD_14	2204
pmTxCarrierPowerP5MD_15	2204
pmTxCarrierPowerP5MD_16	2205
pmTxCarrierPowerP5MD_17	2205
pmTxCarrierPowerP5MD_18	2205
pmTxCarrierPowerP5MD_19	2205
pmTxCarrierPowerP5MD_20	2205
pmTxCarrierPowerP5MD_21	2205
pmTxCarrierPowerP5MD_22	2206
pmTxCarrierPowerP5MD_23	2206
pmTxCarrierPowerP5MD_24	2206
pmTxCarrierPowerP5MD_25	2206
pmTxCarrierPowerP5MD_26	2206
pmTxCarrierPowerP5MD_27	2206
pmTxCarrierPowerP5MD_28	2207
pmTxCarrierPowerP5MD_29	2207
pmTxCarrierPowerP5MD_30	2207
pmTxCarrierPowerP5MD_31	2207
pmTxCarrierPowerP5MD_32	2207
pmTxCarrierPowerP5MD_33	2207
pmTxCarrierPowerP5MD_34	2208
pmTxCarrierPowerP5MD_35	2208
pmTxCarrierPowerP5MD_36	2208
pmTxCarrierPowerP5MD_37	2208
pmTxCarrierPowerP5MD_38	2208
pmTxCarrierPowerP5MD_39	2208
pmTxCarrierPowerP5MD_40	2209
pmTxCarrierPowerP5MD_41	2209
pmTxCarrierPowerP5MD_42	2209
pmTxCarrierPowerP5MD_43	2209
pmTxCarrierPowerP5MD_44	2209
pmTxCarrierPowerP5MD_45	2209
pmTxCarrierPowerP5MD_46	2210
pmTxCarrierPowerP5MD_47	2210
pmTxCarrierPowerP5MD_48	2210

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTxCarrierPowerP5MD_49	2210
pmTxCarrierPowerP5MD_50	2210
Carrier Peg Counts	2210
NodeB_nesw	2211
NodeB_RELEASE	2211
PERLENSEC	2211
PERLENSEC_K	2211
pmAverageRssi_00	2212
pmAverageRssi_01	2212
pmAverageRssi_02	2212
pmAverageRssi_03	2213
pmAverageRssi_04	2213
pmAverageRssi_05	2213
pmAverageRssi_06	2214
pmAverageRssi_07	2214
pmAverageRssi_08	2214
pmAverageRssi_09	2214
pmAverageRssi_10	2215
pmAverageRssi_11	2215
pmAverageRssi_12	2215
pmAverageRssi_13	2216
pmAverageRssi_14	2216
pmAverageRssi_15	2216
pmAverageRssi_16	2217
pmAverageRssi_17	2217
pmAverageRssi_18	2217
pmAverageRssi_19	2218
pmAverageRssi_20	2218
pmAverageRssi_21	2218
pmAverageRssi_22	2218
pmAverageRssi_23	2219
pmAverageRssi_24	2219
pmAverageRssi_25	2219
pmAverageRssi_26	2220
pmAverageRssi_27	2220
pmAverageRssi_28	2220
pmAverageRssi_29	2221
pmAverageRssi_30	2221
pmAverageRssi_31	2221
pmAverageRssi_32	2222
pmAverageRssi_33	2222
pmAverageRssi_34	2222
pmAverageRssi_35	2222
pmAverageRssi_36	2223
pmAverageRssi_37	2223
pmAverageRssi_38	2223
pmAverageRssi_39	2224
pmAverageRssi_40	2224
pmAverageRssi_41	2224
pmAverageRssi_42	2225
pmAverageRssi_43	2225

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageRssi_44	2225
pmAverageRssi_45	2226
pmAverageRssi_46	2226
pmAverageRssi_47	2226
pmAverageRssi_48	2226
pmAverageRssi_49	2227
pmAverageRssi_50	2227
pmAverageRssi_51	2227
pmAverageRssi_52	2228
pmAverageRssi_53	2228
pmAverageRssi_54	2228
pmAverageRssi_55	2229
pmAverageRssi_56	2229
pmAverageRssi_57	2229
pmAverageRssi_58	2230
pmAverageRssi_59	2230
pmAverageRssi_60	2230
pmAverageRssi_61	2230
pmAverageRssiP5MD_61	2231
pmAverageRssiP5MD_62	2231
pmAverageRssiP5MD_63	2232
pmAverageRssiP5MD_64	2232
pmTransmittedCarrierPowerP6_00	2232
pmTransmittedCarrierPowerP6_01	2233
pmTransmittedCarrierPowerP6_02	2233
pmTransmittedCarrierPowerP6_03	2233
pmTransmittedCarrierPowerP6_04	2234
pmTransmittedCarrierPowerP6_05	2234
pmTransmittedCarrierPowerP6_06	2234
pmTransmittedCarrierPowerP6_07	2235
pmTransmittedCarrierPowerP6_08	2235
pmTransmittedCarrierPowerP6_09	2235
pmTransmittedCarrierPowerP6_10	2236
pmTransmittedCarrierPowerP6_11	2236
pmTransmittedCarrierPowerP6_12	2236
pmTransmittedCarrierPowerP6_13	2237
pmTransmittedCarrierPowerP6_14	2237
pmTransmittedCarrierPowerP6_15	2237
pmTransmittedCarrierPowerP6_16	2238
pmTransmittedCarrierPowerP6_17	2238
pmTransmittedCarrierPowerP6_18	2238
pmTransmittedCarrierPowerP6_19	2239
pmTransmittedCarrierPowerP6_20	2239
pmTransmittedCarrierPowerP6_21	2239
pmTransmittedCarrierPowerP6_22	2240
pmTransmittedCarrierPowerP6_23	2240
pmTransmittedCarrierPowerP6_24	2240
pmTransmittedCarrierPowerP6_25	2241
pmTransmittedCarrierPowerP6_26	2241
pmTransmittedCarrierPowerP6_27	2241
pmTransmittedCarrierPowerP6_28	2242

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTransmittedCarrierPowerP6_29	2242
pmTransmittedCarrierPowerP6_30	2242
pmTransmittedCarrierPowerP6_31	2243
pmTransmittedCarrierPowerP6_32	2243
pmTransmittedCarrierPowerP6_33	2243
pmTransmittedCarrierPowerP6_34	2244
pmTransmittedCarrierPowerP6_35	2244
pmTransmittedCarrierPowerP6_36	2244
pmTransmittedCarrierPowerP6_37	2245
pmTransmittedCarrierPowerP6_38	2245
pmTransmittedCarrierPowerP6_39	2245
pmTransmittedCarrierPowerP6_40	2246
pmTransmittedCarrierPowerP6_41	2246
pmTransmittedCarrierPowerP6_42	2246
pmTransmittedCarrierPowerP6_43	2247
pmTransmittedCarrierPowerP6_44	2247
pmTransmittedCarrierPowerP6_45	2247
pmTransmittedCarrierPowerP6_46	2248
pmTransmittedCarrierPowerP6_47	2248
pmTransmittedCarrierPowerP6_48	2248
pmTransmittedCarrierPowerP6_49	2249
pmTransmittedCarrierPowerP6_50	2249
pmTransmittedCarrierPowerP6_51	2249
pmTXCarPwr_000	2250
pmTXCarPwr_001	2250
pmTXCarPwr_002	2250
pmTXCarPwr_003	2251
pmTXCarPwr_004	2251
pmTXCarPwr_005	2251
pmTXCarPwr_006	2252
pmTXCarPwr_007	2252
pmTXCarPwr_008	2252
pmTXCarPwr_009	2252
pmTXCarPwr_010	2253
pmTXCarPwr_011	2253
pmTXCarPwr_012	2253
pmTXCarPwr_013	2254
pmTXCarPwr_014	2254
pmTXCarPwr_015	2254
pmTXCarPwr_016	2255
pmTXCarPwr_017	2255
pmTXCarPwr_018	2255
pmTXCarPwr_019	2256
pmTXCarPwr_020	2256
pmTXCarPwr_021	2256
pmTXCarPwr_022	2257
pmTXCarPwr_023	2257
pmTXCarPwr_024	2257
pmTXCarPwr_025	2258
pmTXCarPwr_026	2258
pmTXCarPwr_027	2258

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTXCarPwr_028	2259
pmTXCarPwr_029	2259
pmTXCarPwr_030	2259
pmTXCarPwr_031	2260
pmTXCarPwr_032	2260
pmTXCarPwr_033	2260
pmTXCarPwr_034	2261
pmTXCarPwr_035	2261
pmTXCarPwr_036	2261
pmTXCarPwr_037	2262
pmTXCarPwr_038	2262
pmTXCarPwr_039	2262
pmTXCarPwr_040	2263
pmTXCarPwr_041	2263
pmTXCarPwr_042	2263
pmTXCarPwr_043	2264
pmTXCarPwr_044	2264
pmTXCarPwr_045	2264
pmTXCarPwr_046	2265
pmTXCarPwr_047	2265
pmTXCarPwr_048	2265
pmTXCarPwr_049	2266
pmTXCarPwr_050	2266
pmTXCarPwr_051	2266
pmTXCarPwr_052	2267
pmTXCarPwr_053	2267
pmTXCarPwr_054	2267
pmTXCarPwr_055	2268
pmTXCarPwr_056	2268
pmTXCarPwr_057	2268
pmTXCarPwr_058	2269
pmTXCarPwr_059	2269
pmTXCarPwr_060	2269
pmTXCarPwr_061	2270
pmTXCarPwr_062	2270
pmTXCarPwr_063	2270
pmTXCarPwr_064	2271
pmTXCarPwr_065	2271
pmTXCarPwr_066	2271
pmTXCarPwr_067	2272
pmTXCarPwr_068	2272
pmTXCarPwr_069	2272
pmTXCarPwr_070	2273
pmTXCarPwr_071	2273
pmTXCarPwr_072	2273
pmTXCarPwr_073	2274
pmTXCarPwr_074	2274
pmTXCarPwr_075	2274
pmTXCarPwr_076	2275
pmTXCarPwr_077	2275
pmTXCarPwr_078	2275

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTXCarPwr_079	2276
pmTXCarPwr_080	2276
pmTXCarPwr_081	2276
pmTXCarPwr_082	2277
pmTXCarPwr_083	2277
pmTXCarPwr_084	2277
pmTXCarPwr_085	2278
pmTXCarPwr_086	2278
pmTXCarPwr_087	2278
pmTXCarPwr_088	2279
pmTXCarPwr_089	2279
pmTXCarPwr_090	2279
pmTXCarPwr_091	2280
pmTXCarPwr_092	2280
pmTXCarPwr_093	2280
pmTXCarPwr_094	2281
pmTXCarPwr_095	2281
pmTXCarPwr_096	2281
pmTXCarPwr_097	2282
pmTXCarPwr_098	2282
pmTXCarPwr_099	2282
pmTXCarPwr_100	2283
pmTXCarPwr_101	2283
pmTXCarPwr_102	2283
pmTxCarrierPowerP5MD_00	2284
pmTxCarrierPowerP5MD_01	2284
pmTxCarrierPowerP5MD_51	2284
CcDevice Primitive Calculations	2285
GRAPHmultiLineSeparator	2285
NUMDAYS	2285
NUMHOURS	2285
CcDevice Peg Counts	2285
PERLENSEC	2285
PERLENSEC_K	2285
pmSamplesMeasuredCcSpLoad	2286
pmSumMeasuredCcSpLoad	2286
CcDevice_NodeB Primitive Calculations	2286
GRAPHmultiLineSeparator	2287
NUMDAYS	2287
NUMHOURS	2287
CcDevice_NodeB Peg Counts	2287
PERLENSEC	2287
PERLENSEC_K	2287
pmSamplesMeasuredCcSpLoad	2288
pmSumMeasuredCcSpLoad	2288
RNC_RELEASE	2288
CcDevice_RNC Primitive Calculations	2289
GRAPHmultiLineSeparator	2289
NUMDAYS	2289
NUMHOURS	2289

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CcDevice_RNC Peg Counts	2289
PERLENSEC	2289
PERLENSEC_K	2290
pmSamplesMeasuredCcSpLoad	2290
pmSumMeasuredCcSpLoad	2290
RNC_RELEASE	2291
CnOperator Primitive Calculations	2291
GRAPHmultiLineSeparator	2291
NUMDAYS	2291
NUMHOURS	2291
ContinuityCheckService Primitive Calculations	2291
GRAPHmultiLineSeparator	2291
NUMDAYS	2291
NUMHOURS	2292
ContinuityCheckService Peg Counts	2292
PERLENSEC	2292
pmForcedRelease	2292
pmNormalRelease	2292
RNC_RELEASE	2293
CsdDigitalService Primitive Calculations	2293
GRAPHmultiLineSeparator	2293
NUMDAYS	2293
NUMHOURS	2293
p_GSM_FTM_connection_reservation_success	2294
p_GSM_UDI_connection_reservation_success	2294
p_Originating_GSM_modem_connection_success	2294
p_Originating_WCDMA_modem_connection_success	2294
p_Seizures_Success_Rate	2294
p_Terminating_GSM_modem_connection_success	2294
p_Terminating_WCDMA_modem_connection_success	2295
p_WCDMA_FTM_connection_reservation_success	2295
p_WCDMA_UDI_connection_reservation_success	2295
CsdDigitalService Peg Counts	2295
PERLENSEC	2295
pmForcedRelease	2295
pmFtmFail	2296
pmFtmFailGsm	2296
pmFtmSucc	2296
pmFtmSuccGsm	2297
pmModemOFail	2297
pmModemOFailGsm	2297
pmModemOSucc	2298
pmModemOSuccGsm	2298
pmModemTFail	2298
pmModemTFailGsm	2299
pmModemTSuccGsm	2299
pmNormalRelease	2299
pmNumFtm	2300
pmNumFtmGsm	2300
pmNumModemO	2300

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNumModemOGsm	2300
pmNumModemT	2301
pmNumModemTGsm	2301
pmNumUdi	2301
pmNumUdiGsm	2302
pmTotalSeizures	2302
pmUdiFail	2302
pmUdiFailGsm	2303
pmUdiSucc	2303
pmUdiSuccGsm	2303
pmUnsuccSeizures	2304
RNC_RELEASE	2304
CsdGsmFhService Primitive Calculations	2304
GRAPHmultiLineSeparator	2304
NUMDAYS	2304
NUMHOURS	2305
p_Seizures_Sucess_Rate	2305
CsdGsmFhService Peg Counts	2305
PERLENSEC	2305
pmBusyDevices	2305
pmForcedRelease	2306
pmNormalRelease	2306
pmTotalSeizures	2306
pmUnsuccSeizures	2307
RNC_RELEASE	2307
CsdModemService Primitive Calculations	2307
GRAPHmultiLineSeparator	2307
GSM_modem_connections	2307
NUMDAYS	2308
NUMHOURS	2308
p_Device_Service_reservation_success	2308
p_Seizures_Sucess_Rate	2308
CsdModemService Peg Counts	2308
PERLENSEC	2308
pmAsyncNonTranModWcdma	2309
pmAsyncNonTransModemGsm	2309
pmAsyncNonTransModemWcdma	2309
pmAsyncTransModemGsm	2309
pmForcedRelease	2310
pmNormalRelease	2310
pmSyncTransModemGsm	2310
pmTotalSeizures	2311
pmUnsuccSeizures	2311
pmV21	2311
pmV21Gsm	2312
pmV22	2312
pmV22bis	2312
pmV22bisGsm	2313
pmV22Gsm	2313
pmV32	2313

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmV32Gsm	2313
pmV34	2314
pmV34Gsm	2314
pmV90	2314
pmV90Gsm	2315
RNC_RELEASE	2315
DcDevice Primitive Calculations	2315
GRAPHmultiLineSeparator	2315
NUMDAYS	2316
NUMHOURS	2316
DcDevice Peg Counts	2316
PERLENSEC	2316
PERLENSEC_K	2316
pmSamplesMeasuredDcSpLoad	2317
pmSumMeasuredDcSpLoad	2317
DcDevice_NodeB Primitive Calculations	2317
GRAPHmultiLineSeparator	2317
NUMDAYS	2317
NUMHOURS	2318
DcDevice_NodeB Peg Counts	2318
PERLENSEC	2318
PERLENSEC_K	2318
RNC_RELEASE	2318
DcDevice_RNC Primitive Calculations	2319
GRAPHmultiLineSeparator	2319
NUMDAYS	2319
NUMHOURS	2319
DcDevice_RNC Peg Counts	2319
PERLENSEC	2319
PERLENSEC_K	2320
pmSamplesMeasuredDcSpLoad	2320
pmSumMeasuredDcSpLoad	2320
RNC_RELEASE	2321
DownlinkBaseBandPool Primitive Calculations	2321
GRAPHmultiLineSeparator	2321
k_CE_DL_CONG	2321
NUMDAYS	2321
NUMHOURS	2321
DownlinkBaseBandPool Peg Counts	2322
NodeB_RELEASE	2322
PERLENSEC	2322
PERLENSEC_K	2322
pmApomcOfMdlr	2323
pmApomcOfMdsr	2323
pmApomcOfSpreadersUsed	2323
pmDIActPeakCapUsage	2324
pmNoOfRadioLinksSf128_00	2324
pmNoOfRadioLinksSf128_01	2324
pmNoOfRadioLinksSf128_02	2324
pmNoOfRadioLinksSf128_03	2325

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfRadioLinksSf128_04	2325
pmNoOfRadioLinksSf128_05	2325
pmNoOfRadioLinksSf128_06	2326
pmNoOfRadioLinksSf128_07	2326
pmNoOfRadioLinksSf128_08	2326
pmNoOfRadioLinksSf128_09	2326
pmNoOfRadioLinksSf128_10	2327
pmNoOfRadioLinksSf128_11	2327
pmNoOfRadioLinksSf128_12	2327
pmNoOfRadioLinksSf128_13	2328
pmNoOfRadioLinksSf128_14	2328
pmNoOfRadioLinksSf16_00	2328
pmNoOfRadioLinksSf16_01	2329
pmNoOfRadioLinksSf16_02	2329
pmNoOfRadioLinksSf16_03	2329
pmNoOfRadioLinksSf16_04	2330
pmNoOfRadioLinksSf16_05	2330
pmNoOfRadioLinksSf16_06	2330
pmNoOfRadioLinksSf16_07	2330
pmNoOfRadioLinksSf16_08	2331
pmNoOfRadioLinksSf16_09	2331
pmNoOfRadioLinksSf16_10	2331
pmNoOfRadioLinksSf16_11	2332
pmNoOfRadioLinksSf16_12	2332
pmNoOfRadioLinksSf16_13	2332
pmNoOfRadioLinksSf16_14	2333
pmNoOfRadioLinksSf256_00	2333
pmNoOfRadioLinksSf256_01	2333
pmNoOfRadioLinksSf256_02	2334
pmNoOfRadioLinksSf256_03	2334
pmNoOfRadioLinksSf256_04	2334
pmNoOfRadioLinksSf256_05	2334
pmNoOfRadioLinksSf256_06	2335
pmNoOfRadioLinksSf256_07	2335
pmNoOfRadioLinksSf256_08	2335
pmNoOfRadioLinksSf256_09	2336
pmNoOfRadioLinksSf256_10	2336
pmNoOfRadioLinksSf256_11	2336
pmNoOfRadioLinksSf256_12	2337
pmNoOfRadioLinksSf256_13	2337
pmNoOfRadioLinksSf256_14	2337
pmNoOfRadioLinksSf32_00	2338
pmNoOfRadioLinksSf32_01	2338
pmNoOfRadioLinksSf32_02	2338
pmNoOfRadioLinksSf32_03	2338
pmNoOfRadioLinksSf32_04	2339
pmNoOfRadioLinksSf32_05	2339
pmNoOfRadioLinksSf32_06	2339
pmNoOfRadioLinksSf32_07	2340
pmNoOfRadioLinksSf32_08	2340
pmNoOfRadioLinksSf32_09	2340

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfRadioLinksSf32_10	2341
pmNoOfRadioLinksSf32_11	2341
pmNoOfRadioLinksSf32_12	2341
pmNoOfRadioLinksSf32_13	2342
pmNoOfRadioLinksSf32_14	2342
pmNoOfRadioLinksSf4_00	2342
pmNoOfRadioLinksSf4_01	2342
pmNoOfRadioLinksSf4_02	2343
pmNoOfRadioLinksSf4_03	2343
pmNoOfRadioLinksSf4_04	2343
pmNoOfRadioLinksSf4_05	2344
pmNoOfRadioLinksSf4_06	2344
pmNoOfRadioLinksSf4_07	2344
pmNoOfRadioLinksSf4_08	2345
pmNoOfRadioLinksSf4_09	2345
pmNoOfRadioLinksSf4_10	2345
pmNoOfRadioLinksSf4_11	2346
pmNoOfRadioLinksSf4_12	2346
pmNoOfRadioLinksSf4_13	2346
pmNoOfRadioLinksSf4_14	2346
pmNoOfRadioLinksSf64_00	2347
pmNoOfRadioLinksSf64_01	2347
pmNoOfRadioLinksSf64_02	2347
pmNoOfRadioLinksSf64_03	2348
pmNoOfRadioLinksSf64_04	2348
pmNoOfRadioLinksSf64_05	2348
pmNoOfRadioLinksSf64_06	2349
pmNoOfRadioLinksSf64_07	2349
pmNoOfRadioLinksSf64_08	2349
pmNoOfRadioLinksSf64_09	2350
pmNoOfRadioLinksSf64_10	2350
pmNoOfRadioLinksSf64_11	2350
pmNoOfRadioLinksSf64_12	2350
pmNoOfRadioLinksSf64_13	2351
pmNoOfRadioLinksSf64_14	2351
pmNoOfRadioLinksSf8_00	2351
pmNoOfRadioLinksSf8_01	2352
pmNoOfRadioLinksSf8_02	2352
pmNoOfRadioLinksSf8_03	2352
pmNoOfRadioLinksSf8_04	2353
pmNoOfRadioLinksSf8_05	2353
pmNoOfRadioLinksSf8_06	2353
pmNoOfRadioLinksSf8_07	2354
pmNoOfRadioLinksSf8_08	2354
pmNoOfRadioLinksSf8_09	2354
pmNoOfRadioLinksSf8_10	2354
pmNoOfRadioLinksSf8_11	2355
pmNoOfRadioLinksSf8_12	2355
pmNoOfRadioLinksSf8_13	2355
pmNoOfRadioLinksSf8_14	2356
pmNoOfRIAdditionFailuresSf128	2356

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfRIAdditionFailuresSf16	2356
pmNoOfRIAdditionFailuresSf256	2357
pmNoOfRIAdditionFailuresSf32	2357
pmNoOfRIAdditionFailuresSf4	2357
pmNoOfRIAdditionFailuresSf64	2358
pmNoOfRIAdditionFailuresSf8	2358
pmNoOfRIAdditionFailuresSf4	2358
pmSetupAttemptsSf128	2358
pmSetupAttemptsSf16	2359
pmSetupAttemptsSf256	2359
pmSetupAttemptsSf32	2359
pmSetupAttemptsSf4	2360
pmSetupAttemptsSf64	2360
pmSetupAttemptsSf8	2360
pmSetupFailuresSf128	2361
pmSetupFailuresSf16	2361
pmSetupFailuresSf256	2361
pmSetupFailuresSf32	2361
pmSetupFailuresSf4	2362
pmSetupFailuresSf64	2362
pmSetupFailuresSf8	2362
DtmfRcvrService Primitive Calculations	2363
GRAPHmultiLineSeparator	2363
NUMDAYS	2363
NUMHOURS	2363
DtmfRcvrService Peg Counts	2363
PERLENSEC	2363
pmForcedRelease	2364
pmNormalRelease	2364
pmTotalSeizures	2364
pmUnsuccSeizures	2365
RNC_RELEASE	2365
DtmfSenderService Primitive Calculations	2365
GRAPHmultiLineSeparator	2365
NUMDAYS	2365
NUMHOURS	2366
p_Seizures_Sucess_Rate	2366
DtmfSenderService Peg Counts	2366
PERLENSEC	2366
pmForcedRelease	2366
pmNormalRelease	2367
pmTotalSeizures	2367
pmUnsuccSeizures	2367
RNC_RELEASE	2367
E1PhysPathTerm_NodeB Primitive Calculations	2368
GRAPHmultiLineSeparator	2368
NUMDAYS	2368
NUMHOURS	2368
Phy_Errored_Ratio_NodeB	2368
Phy_Severely_Errored_Ratio_NodeB	2368

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

E1PhysPathTerm_NodeB Peg Counts	2369
NodeB_RELEASE	2369
PERLENSEC	2369
PERLENSEC_K	2369
pmEs	2370
pmSes	2370
pmUas	2370
E1PhysPathTerm_RNC Primitive Calculations	2371
GRAPHmultiLineSeparator	2371
NUMDAYS	2371
NUMHOURS	2371
Phy_Errored_Ratio_RNC	2371
Phy_Severely_Errored_Ratio_RNC	2371
E1PhysPathTerm_RNC Peg Counts	2371
PERLENSEC	2372
PERLENSEC_K	2372
pmEs	2372
pmSes	2373
pmUas	2373
RNC_RELEASE	2373
E1Ttp_NodeB Primitive Calculations	2373
GRAPHmultiLineSeparator	2374
NUMDAYS	2374
NUMHOURS	2374
Phy_Errored_Ratio_NodeB	2374
Phy_Severely_Errored_Ratio_NodeB	2374
E1Ttp_NodeB Peg Counts	2374
NodeB_RELEASE	2374
PERLENSEC	2375
PERLENSEC_K	2375
pmEs	2375
pmSes	2376
pmUas	2376
E1Ttp_RNC Primitive Calculations	2376
GRAPHmultiLineSeparator	2376
NUMDAYS	2377
NUMHOURS	2377
Phy_Errored_Ratio_RNC	2377
Phy_Severely_Errored_Ratio_RNC	2377
E1Ttp_RNC Peg Counts	2377
PERLENSEC	2377
PERLENSEC_K	2378
pmEs	2378
pmSes	2378
pmUas	2379
RNC_RELEASE	2379
ECRouteParameterSet Primitive Calculations	2379
GRAPHmultiLineSeparator	2379
NUMDAYS	2379
NUMHOURS	2380

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

ECRouteParameterSet Peg Counts	2380
PERLENSEC	2380
pmI10ValAslr	2380
pmI10ValAsls	2380
pmI10ValErl	2381
pmI10ValPd	2381
pmI11ValAslr	2381
pmI11ValAsls	2382
pmI11ValErl	2382
pmI11ValPd	2382
pmI12ValAslr	2383
pmI12ValAsls	2383
pmI12ValErl	2383
pmI12ValPd	2383
pmI13ValAslr	2384
pmI13ValAsls	2384
pmI13ValErl	2384
pmI13ValPd	2385
pmI14ValAslr	2385
pmI14ValAsls	2385
pmI14ValErl	2386
pmI14ValPd	2386
pmI15ValAslr	2386
pmI15ValAsls	2387
pmI15ValErl	2387
pmI15ValPd	2387
pmI16ValAslr	2387
pmI16ValAsls	2388
pmI16ValErl	2388
pmI16ValPd	2388
pmI1ValAslr	2389
pmI1ValAsls	2389
pmI1ValErl	2389
pmI1ValPd	2390
pmI2ValAslr	2390
pmI2ValAsls	2390
pmI2ValErl	2391
pmI2ValPd	2391
pmI3ValAslr	2391
pmI3ValAsls	2391
pmI3ValErl	2392
pmI3ValPd	2392
pmI4ValAslr	2392
pmI4ValAsls	2393
pmI4ValErl	2393
pmI4ValPd	2393
pmI5ValAslr	2394
pmI5ValAsls	2394
pmI5ValErl	2394
pmI5ValPd	2395
pmI6ValAslr	2395

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmI6ValAsls	2395
pmI6ValErl	2395
pmI6ValPd	2396
pmI7ValAslr	2396
pmI7ValAsls	2396
pmI7ValErl	2397
pmI7ValPd	2397
pmI8ValAslr	2397
pmI8ValAsls	2398
pmI8ValErl	2398
pmI8ValPd	2398
pmI9ValAslr	2399
pmI9ValAsls	2399
pmI9ValErl	2399
pmI9ValPd	2399
pmNInvalid	2400
RNC_RELEASE	2400
ECServiceRNC Primitive Calculations	2400
GRAPHmultiLineSeparator	2400
NUMDAYS	2401
NUMHOURS	2401
p_Seizures_Sucess_Rate	2401
ECServiceRNC Peg Counts	2401
PERLENSEC	2401
pmForcedRelease	2401
pmNormalRelease	2402
pmTotalSeizures	2402
pmUnsuccSeizures	2402
RNC_RELEASE	2403
EDchResources Primitive Calculations	2403
GRAPHmultiLineSeparator	2403
NUMDAYS	2403
NUMHOURS	2403
EDchResources Peg Counts	2403
PERLENSEC	2404
PERLENSEC_K	2404
pmCommonChPowerEul_00	2404
pmCommonChPowerEul_01	2405
pmCommonChPowerEul_02	2405
pmCommonChPowerEul_03	2405
pmCommonChPowerEul_04	2406
pmCommonChPowerEul_05	2406
pmCommonChPowerEul_06	2406
pmCommonChPowerEul_07	2407
pmCommonChPowerEul_08	2407
pmCommonChPowerEul_09	2407
pmCommonChPowerEul_10	2408
pmCommonChPowerEul_11	2408
pmCommonChPowerEul_12	2408
pmCommonChPowerEul_13	2409

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmCommonChPowerEul_14	2409
pmCommonChPowerEul_15	2409
pmCommonChPowerEul_16	2410
pmCommonChPowerEul_17	2410
pmCommonChPowerEul_18	2410
pmCommonChPowerEul_19	2411
pmCommonChPowerEul_20	2411
pmCommonChPowerEul_21	2411
pmCommonChPowerEul_22	2412
pmCommonChPowerEul_23	2412
pmCommonChPowerEul_24	2412
pmCommonChPowerEul_25	2413
pmCommonChPowerEul_26	2413
pmCommonChPowerEul_27	2413
pmCommonChPowerEul_28	2414
pmCommonChPowerEul_29	2414
pmCommonChPowerEul_30	2414
pmCommonChPowerEul_31	2415
pmCommonChPowerEul_32	2415
pmCommonChPowerEul_33	2415
pmCommonChPowerEul_34	2416
pmCommonChPowerEul_35	2416
pmCommonChPowerEul_36	2416
pmCommonChPowerEul_37	2417
pmCommonChPowerEul_38	2417
pmCommonChPowerEul_39	2417
pmCommonChPowerEul_40	2418
pmNoActive10msFramesEul	2418
pmNoAllowedEul	2418
pmNoiseFloor_00	2419
pmNoiseFloor_01	2419
pmNoiseFloor_02	2419
pmNoiseFloor_03	2420
pmNoiseFloor_04	2420
pmNoiseFloor_05	2420
pmNoiseFloor_06	2421
pmNoiseFloor_07	2421
pmNoiseFloor_08	2421
pmNoiseFloor_09	2422
pmNoiseFloor_10	2422
pmNoiseFloor_11	2422
pmNoiseFloor_12	2423
pmNoiseFloor_13	2423
pmNoiseFloor_14	2423
pmNoiseFloor_15	2424
pmNoiseFloor_16	2424
pmNoiseFloor_17	2424
pmNoiseFloor_18	2425
pmNoiseFloor_19	2425
pmNoiseFloor_20	2425
pmNoiseFloor_21	2426

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoiseFloor_22	2426
pmNoiseFloor_23	2426
pmNoiseFloor_24	2427
pmNoiseFloor_25	2427
pmNoiseFloor_26	2427
pmNoiseFloor_27	2428
pmNoiseFloor_28	2428
pmNoiseFloor_29	2428
pmNoiseFloor_30	2429
pmNoiseFloor_31	2429
pmNoiseFloor_32	2429
pmNoiseFloor_33	2430
pmNoiseFloor_34	2430
pmNoiseFloor_35	2430
pmNoiseFloor_36	2431
pmNoiseFloor_37	2431
pmNoiseFloor_38	2431
pmNoiseFloor_39	2432
pmNoiseFloor_40	2432
pmNoiseFloor_41	2432
pmNoiseFloor_42	2433
pmNoiseFloor_43	2433
pmNoiseFloor_44	2433
pmNoiseFloor_45	2434
pmNoiseFloor_46	2434
pmNoiseFloor_47	2434
pmNoiseFloor_48	2435
pmNoiseFloor_49	2435
pmNoiseFloor_50	2435
pmNoiseFloor_51	2436
pmNoiseFloor_52	2436
pmNoiseFloor_53	2436
pmNoiseFloor_54	2437
pmNoiseFloor_55	2437
pmNoSchEdchEul_00	2437
pmNoSchEdchEul_01	2438
pmNoSchEdchEul_02	2438
pmNoSchEdchEul_03	2438
pmNoSchEdchEul_04	2439
pmNoSchEdchEul_05	2439
pmNoSchEdchEul_06	2439
pmNoSchEdchEul_07	2440
pmNoSchEdchEul_08	2440
pmNoSchEdchEul_09	2440
pmNoSchEdchEul_10	2441
pmNoSchEdchEul_11	2441
pmNoSchEdchEul_12	2441
pmNoSchEdchEul_13	2442
pmNoSchEdchEul_14	2442
pmNoSchEdchEul_15	2442
pmNoSchEdchEul_16	2443

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoSchEdchEul_17	2443
pmNoSchEdchEul_18	2443
pmNoSchEdchEul_19	2444
pmNoSchEdchEul_20	2444
pmNoUIUuLoadLimitEul	2444
pmOwnUuLoad_00	2445
pmOwnUuLoad_01	2445
pmOwnUuLoad_02	2445
pmOwnUuLoad_03	2446
pmOwnUuLoad_04	2446
pmOwnUuLoad_05	2446
pmOwnUuLoad_06	2447
pmOwnUuLoad_07	2447
pmOwnUuLoad_08	2447
pmOwnUuLoad_09	2448
pmOwnUuLoad_10	2448
pmOwnUuLoad_11	2448
pmOwnUuLoad_12	2449
pmOwnUuLoad_13	2449
pmOwnUuLoad_14	2449
pmOwnUuLoad_15	2450
pmOwnUuLoad_16	2450
pmOwnUuLoad_17	2450
pmOwnUuLoad_18	2451
pmOwnUuLoad_19	2451
pmOwnUuLoad_20	2451
pmOwnUuLoad_21	2452
pmOwnUuLoad_22	2452
pmOwnUuLoad_23	2452
pmOwnUuLoad_24	2453
pmOwnUuLoad_25	2453
pmOwnUuLoad_26	2453
pmOwnUuLoad_27	2454
pmOwnUuLoad_28	2454
pmOwnUuLoad_29	2454
pmOwnUuLoad_30	2455
pmOwnUuLoad_31	2455
pmOwnUuLoad_32	2455
pmOwnUuLoad_33	2456
pmOwnUuLoad_34	2456
pmOwnUuLoad_35	2456
pmOwnUuLoad_36	2457
pmOwnUuLoad_37	2457
pmOwnUuLoad_38	2457
pmOwnUuLoad_39	2458
pmOwnUuLoad_40	2458
pmOwnUuLoad_41	2458
pmOwnUuLoad_42	2459
pmOwnUuLoad_43	2459
pmOwnUuLoad_44	2459
pmOwnUuLoad_45	2460

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmOwnUuLoad_46	2460
pmOwnUuLoad_47	2460
pmOwnUuLoad_48	2461
pmOwnUuLoad_49	2461
pmOwnUuLoad_50	2461
pmSumAckedBitsCellEul	2462
pmSumNackedBitsCellEul	2462
pmTotalRotCoverage_00	2462
pmTotalRotCoverage_01	2463
pmTotalRotCoverage_02	2463
pmTotalRotCoverage_03	2463
pmTotalRotCoverage_04	2464
pmTotalRotCoverage_05	2464
pmTotalRotCoverage_06	2464
pmTotalRotCoverage_07	2465
pmTotalRotCoverage_08	2465
pmTotalRotCoverage_09	2465
pmTotalRotCoverage_10	2466
pmTotalRotCoverage_11	2466
pmTotalRotCoverage_12	2466
pmTotalRotCoverage_13	2467
pmTotalRotCoverage_14	2467
pmTotalRotCoverage_15	2467
pmTotalRotCoverage_16	2468
pmTotalRotCoverage_17	2468
pmTotalRotCoverage_18	2468
pmTotalRotCoverage_19	2469
pmTotalRotCoverage_20	2469
pmTotalRotCoverage_21	2469
pmTotalRotCoverage_22	2470
pmTotalRotCoverage_23	2470
pmTotalRotCoverage_24	2470
pmTotalRotCoverage_25	2471
pmTotalRotCoverage_26	2471
pmTotalRotCoverage_27	2471
pmTotalRotCoverage_28	2472
pmTotalRotCoverage_29	2472
pmTotalRotCoverage_30	2472
pmTotalRotCoverage_31	2473
pmTotalRotCoverage_32	2473
pmTotalRotCoverage_33	2473
pmTotalRotCoverage_34	2474
pmTotalRotCoverage_35	2474
pmTotalRotCoverage_36	2474
pmTotalRotCoverage_37	2475
pmTotalRotCoverage_38	2475
pmTotalRotCoverage_39	2475
pmTotalRotCoverage_40	2476
pmTotalRotCoverage_41	2476
pmTotalRotCoverage_42	2476
pmTotalRotCoverage_43	2477

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTotalRotCoverage_44	2477
pmTotalRotCoverage_45	2477
pmTotalRotCoverage_46	2478
pmTotalRotCoverage_47	2478
pmTotalRotCoverage_48	2478
pmTotalRotCoverage_49	2479
pmTotalRotCoverage_50	2479
pmTotRateGrantedEul_00	2479
pmTotRateGrantedEul_01	2480
pmTotRateGrantedEul_02	2480
pmTotRateGrantedEul_03	2480
pmTotRateGrantedEul_04	2481
pmTotRateGrantedEul_05	2481
pmTotRateGrantedEul_06	2481
pmTotRateGrantedEul_07	2482
pmTotRateGrantedEul_08	2482
pmTotRateGrantedEul_09	2482
pmTotRateGrantedEul_10	2483
pmTotRateGrantedEul_11	2483
pmTotRateGrantedEul_12	2483
pmTotRateGrantedEul_13	2484
pmTotRateGrantedEul_14	2484
pmTotRateGrantedEul_15	2484
pmTotRateGrantedEul_16	2485
pmTotRateGrantedEul_17	2485
pmTotRateGrantedEul_18	2485
pmTotRateGrantedEul_19	2486
pmTotRateGrantedEul_20	2486
pmTotRateGrantedEul_21	2486
pmTotRateGrantedEul_22	2487
pmTotRateGrantedEul_23	2487
pmTotRateGrantedEul_24	2487
pmTotRateGrantedEul_25	2488
pmTotRateGrantedEul_26	2488
pmTotRateGrantedEul_27	2488
pmTotRateGrantedEul_28	2489
pmTotRateGrantedEul_29	2489
pmTotRateGrantedEul_30	2489
pmTotRateGrantedEul_31	2490
pmTotRateGrantedEul_32	2490
pmTotRateGrantedEul_33	2490
pmTotRateGrantedEul_34	2491
pmTotRateGrantedEul_35	2491
pmTotRateGrantedEul_36	2491
pmTotRateGrantedEul_37	2492
pmTotRateGrantedEul_38	2492
pmTotRateGrantedEul_39	2492
pmTotRateGrantedEul_40	2493
pmTotRateGrantedEul_41	2493
pmTotRateGrantedEul_42	2493
pmTotRateGrantedEul_43	2494

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTotRateGrantedEul_44	2494
pmTotRateGrantedEul_45	2494
pmTotRateGrantedEul_46	2495
pmTotRateGrantedEul_47	2495
pmTotRateGrantedEul_48	2495
pmTotRateGrantedEul_49	2496
pmTotRateGrantedEul_50	2496
pmTotRateGrantedEul_51	2496
pmTotRateGrantedEul_52	2497
pmTotRateGrantedEul_53	2497
pmTotRateGrantedEul_54	2497
pmTotRateGrantedEul_55	2498
pmTotRateGrantedEul_56	2498
pmTotRateGrantedEul_57	2498
pmTotRateGrantedEul_58	2499
pmTotRateGrantedEul_59	2499
pmTotRateGrantedEul_60	2499
pmWaitingTimeEul_00	2500
pmWaitingTimeEul_01	2500
pmWaitingTimeEul_02	2500
pmWaitingTimeEul_03	2501
pmWaitingTimeEul_04	2501
pmWaitingTimeEul_05	2501
pmWaitingTimeEul_06	2502
pmWaitingTimeEul_07	2502
pmWaitingTimeEul_08	2502
pmWaitingTimeEul_09	2503
pmWaitingTimeEul_10	2503
pmWaitingTimeEul_11	2504
pmWaitingTimeEul_12	2504
pmWaitingTimeEul_13	2504
pmWaitingTimeEul_14	2505
pmWaitingTimeEul_15	2505
pmWaitingTimeEul_16	2505
pmWaitingTimeEul_17	2506
pmWaitingTimeEul_18	2506
pmWaitingTimeEul_19	2506
pmWaitingTimeEul_20	2507
pmWaitingTimeEul_21	2507
pmWaitingTimeEul_22	2508
pmWaitingTimeEul_23	2508
pmWaitingTimeEul_24	2508
pmWaitingTimeEul_25	2509
pmWaitingTimeEul_26	2509
pmWaitingTimeEul_27	2509
pmWaitingTimeEul_28	2510
Equipment_NodeB Primitive Calculations	2510
GRAPHmultiLineSeparator	2510
NUMDAYS	2510
NUMHOURS	2510
Equipment_RNC Primitive Calculations	2511

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GRAPHmultiLineSeparator	2511
MainProcessorLoadRNC_Equipment	2511
NUMDAYS	2511
NUMHOURS	2511
EthernetLink_NodeB Primitive Calculations	2511
GRAPHmultiLineSeparator	2511
NUMDAYS	2512
NUMHOURS	2512
Received_Packets_Ethernet_Link_NodeB	2512
Sent_Packets_IP_Ethernet_Link_NodeB	2512
EthernetLink_NodeB Peg Counts	2512
NodeB_RELEASE	2512
PERLENSEC	2512
PERLENSEC_K	2513
pmNoOfIfInDiscards	2513
pmNoOfIfInErrors	2513
pmNoOfIfInNUcastPkts	2514
pmNoOfIfInUcastPkts	2514
pmNoOfIfOutNUcastPkts	2514
pmNoOfIfOutUcastPkts	2515
EthernetLink_RNC Primitive Calculations	2515
GRAPHmultiLineSeparator	2515
NUMDAYS	2515
NUMHOURS	2515
Received_Packets_Ethernet_Link_RNC	2516
EthernetLink_RNC Peg Counts	2516
PERLENSEC	2516
PERLENSEC_K	2516
pmNoOfIfInDiscards	2516
pmNoOfIfInErrors	2517
pmNoOfIfInNUcastPkts	2517
pmNoOfIfInUcastPkts	2517
pmNoOfIfOutNUcastPkts	2518
pmNoOfIfOutUcastPkts	2518
RNC_RELEASE	2518
Etm1_NodeB Primitive Calculations	2519
GRAPHmultiLineSeparator	2519
NUMDAYS	2519
NUMHOURS	2519
Etm1_RNC Primitive Calculations	2519
GRAPHmultiLineSeparator	2519
NUMDAYS	2519
NUMHOURS	2519
Etm4_NodeB Primitive Calculations	2520
GRAPHmultiLineSeparator	2520
NUMDAYS	2520
NUMHOURS	2520
Etm4_RNC Primitive Calculations	2520
GRAPHmultiLineSeparator	2520
NUMDAYS	2520

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	2521
FastEthernet_NodeB Primitive Calculations	2521
GRAPHmultiLineSeparator	2521
NUMDAYS	2521
NUMHOURS	2521
pmlfInOctets	2521
pmlfOutOctets	2521
FastEthernet_NodeB Peg Counts	2521
PERLENSEC	2522
PERLENSEC_K	2522
pmlfInBroadcastPkts	2522
pmlfInDiscards	2523
pmlfInErrors	2523
pmlfInMulticastPkts	2523
pmlfInOctetsHi	2524
pmlfInOctetsLo	2524
pmlfInUcastPkts	2525
pmlfInUnknownProtos	2525
pmlfOutBroadcastPkts	2525
pmlfOutDiscards	2526
pmlfOutErrors	2526
pmlfOutMulticastPkts	2526
pmlfOutOctetsHi	2527
pmlfOutOctetsLo	2527
pmlfOutUcastPkts	2528
FastEthernet_RNC Primitive Calculations	2528
GRAPHmultiLineSeparator	2528
NUMDAYS	2528
NUMHOURS	2528
pmlfInOctets	2528
pmlfOutOctets	2529
FastEthernet_RNC Peg Counts	2529
PERLENSEC	2529
PERLENSEC_K	2529
pmlfInBroadcastPkts	2529
pmlfInDiscards	2530
pmlfInErrors	2530
pmlfInMulticastPkts	2531
pmlfInOctetsHi	2531
pmlfInOctetsLo	2531
pmlfInUcastPkts	2532
pmlfInUnknownProtos	2532
pmlfOutBroadcastPkts	2533
pmlfOutDiscards	2533
pmlfOutErrors	2533
pmlfOutMulticastPkts	2534
pmlfOutOctetsHi	2534
pmlfOutOctetsLo	2534
pmlfOutUcastPkts	2535
FrameSynch Primitive Calculations	2535

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GRAPHmultiLineSeparator	2535
NUMDAYS	2535
NUMHOURS	2536
FrameSynch Peg Counts	2536
doStep	2536
dto	2536
PERLENSEC	2536
PERLENSEC_K	2537
pmNoDchDITimingAdjContrFrames	2537
pmNoDchUIDataFramesOutsideWindow	2537
pmNoDIDchDiscardedDataFramesE	2538
pmNoDIDchDiscardedDataFramesL	2538
pmNoUIDchDiscardedDataFramesE	2538
pmNoUIDchDiscardedDataFramesL	2538
reservedBy	2539
RNC_Release	2539
toAE	2539
toAEUI	2540
toAWE	2540
toAWEUI	2540
toAWS	2540
toAWSUI	2540
tProcRbsDI	2541
tProcRbsUI	2541
tProcRncDI	2541
tProcRncUI	2541
uoStep	2542
userLabel	2542
uto	2542
GeneralProcUnit_NodeB Primitive Calculations	2542
GRAPHmultiLineSeparator	2542
NUMDAYS	2543
NUMHOURS	2543
GeneralProcUnit_NodeB Peg Counts	2543
pmAdmittedRequestsB0	2543
pmAdmittedRequestsB1	2543
pmAdmittedRequestsF0	2544
pmAdmittedRequestsF1	2544
pmAdmittedRequestsF2	2544
pmAdmittedRequestsF3	2545
pmAdmittedRequestsF4	2545
pmMeasuredLoad_0	2545
pmMeasuredLoad_1	2545
pmMeasuredLoad_2	2546
pmMeasuredLoad_3	2546
pmMeasuredLoad_4	2546
pmMeasuredLoad_5	2547
pmMeasuredLoad_6	2547
pmMeasuredLoad_7	2547
pmRefusedRequestsB0	2548

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRefusedRequestsB1	2548
pmRefusedRequestsF0	2548
pmRefusedRequestsF1	2549
pmRefusedRequestsF2	2549
pmRefusedRequestsF3	2549
pmRefusedRequestsF4	2549
pmSamplesMeasuredLoad	2550
pmSumMeasuredLoad	2550
GeneralProcUnit_RNC Primitive Calculations	2550
GRAPHmultiLineSeparator	2550
NUMDAYS	2550
NUMHOURS	2551
p_MeasuredLoad	2551
GeneralProcUnit_RNC Peg Counts	2551
pmAdmittedRequestsB0	2551
pmAdmittedRequestsB1	2551
pmAdmittedRequestsF0	2552
pmAdmittedRequestsF1	2552
pmAdmittedRequestsF2	2552
pmAdmittedRequestsF3	2553
pmAdmittedRequestsF4	2553
pmMeasuredLoad_0	2553
pmMeasuredLoad_1	2553
pmMeasuredLoad_2	2554
pmMeasuredLoad_3	2554
pmMeasuredLoad_4	2554
pmMeasuredLoad_5	2555
pmMeasuredLoad_6	2555
pmMeasuredLoad_7	2555
pmRefusedRequestsB0	2556
pmRefusedRequestsB1	2556
pmRefusedRequestsF0	2556
pmRefusedRequestsF1	2557
pmRefusedRequestsF2	2557
pmRefusedRequestsF3	2557
pmRefusedRequestsF4	2557
pmSamplesMeasuredLoad	2558
pmSumMeasuredLoad	2558
GigaBitEthernet_NodeB Primitive Calculations	2558
GRAPHmultiLineSeparator	2558
NUMDAYS	2558
NUMHOURS	2559
pmIfInOctetsLink1	2559
pmIfInOctetsLink2	2559
pmIfOutOctetsLink1	2559
pmIfOutOctetsLink2	2559
GigaBitEthernet_NodeB Peg Counts	2559
PERLENSEC	2559
PERLENSEC_K	2560
pmDot1qTpVlanPortInDiscLink1	2560

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDot1qTpVlanPortInDiscLink2	2560
pmIfInBroadcastPktsLink1	2561
pmIfInBroadcastPktsLink2	2561
pmIfInDiscardsLink1	2561
pmIfInDiscardsLink2	2562
pmIfInErrorsLink1	2562
pmIfInErrorsLink2	2562
pmIfInMulticastPktsLink1	2563
pmIfInMulticastPktsLink2	2563
pmIfInOctetsLink1Hi	2563
pmIfInOctetsLink1Lo	2564
pmIfInOctetsLink2Hi	2564
pmIfInOctetsLink2Lo	2565
pmIfInUcastPktsLink1	2565
pmIfInUcastPktsLink2	2565
pmIfInUnknownProtosLink1	2566
pmIfInUnknownProtosLink2	2566
pmIfOutBroadcastPktsLink1	2566
pmIfOutBroadcastPktsLink2	2567
pmIfOutDiscardsLink1	2567
pmIfOutDiscardsLink2	2567
pmIfOutErrorsLink1	2568
pmIfOutErrorsLink2	2568
pmIfOutMulticastPktsLink1	2568
pmIfOutMulticastPktsLink2	2569
pmIfOutOctetsLink1Hi	2569
pmIfOutOctetsLink1Lo	2569
pmIfOutOctetsLink2Hi	2570
pmIfOutOctetsLink2Lo	2570
pmIfOutUcastPktsLink1	2571
pmIfOutUcastPktsLink2	2571
GigaBitEthernet_RNC Primitive Calculations	2571
GRAPHmultiLineSeparator	2571
NUMDAYS	2572
NUMHOURS	2572
pmIfInOctetsLink1	2572
pmIfInOctetsLink2	2572
pmIfOutOctetsLink1	2572
pmIfOutOctetsLink2	2572
GigaBitEthernet_RNC Peg Counts	2572
PERLENSEC	2573
PERLENSEC_K	2573
pmDot1qTpVlanPortInDiscLink1	2573
pmDot1qTpVlanPortInDiscLink2	2574
pmIfInBroadcastPktsLink1	2574
pmIfInBroadcastPktsLink2	2574
pmIfInDiscardsLink1	2575
pmIfInDiscardsLink2	2575
pmIfInErrorsLink1	2575
pmIfInErrorsLink2	2576
pmIfInMulticastPktsLink1	2576

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmIfInMulticastPktsLink2	2576
pmIfInOctetsLink1Hi	2577
pmIfInOctetsLink1Lo	2577
pmIfInOctetsLink2Hi	2577
pmIfInOctetsLink2Lo	2578
pmIfInUcastPktsLink1	2578
pmIfInUcastPktsLink2	2579
pmIfInUnknownProtosLink1	2579
pmIfInUnknownProtosLink2	2579
pmIfOutBroadcastPktsLink1	2580
pmIfOutBroadcastPktsLink2	2580
pmIfOutDiscardsLink1	2580
pmIfOutDiscardsLink2	2581
pmIfOutErrorsLink1	2581
pmIfOutErrorsLink2	2581
pmIfOutMulticastPktsLink1	2582
pmIfOutMulticastPktsLink2	2582
pmIfOutOctetsLink1Hi	2582
pmIfOutOctetsLink1Lo	2583
pmIfOutOctetsLink2Hi	2583
pmIfOutOctetsLink2Lo	2583
pmIfOutUcastPktsLink1	2584
pmIfOutUcastPktsLink2	2584
GsmRelation Primitive Calculations	2585
GRAPHmultiLineSeparator	2585
GSM_Cell_Change_Failure_Rate_PS_Interactive	2585
GSM_Handover_Success_Rate_Multi_RAB	2585
GSM_Handover_Success_Rate_Speech	2585
GSM_Handover_Success_Rate_Streaming_CS_57	2585
GSM_HO_OUT_FAIL	2585
NUMDAYS	2586
NUMHOURS	2586
GsmRelation Peg Counts	2586
adjacentCell	2586
bcc	2586
bcchFrequency	2587
cellIdentity	2587
lac	2587
mcc	2588
mnc	2588
mobilityRelationType	2588
ncc	2589
NodeB_RELEASE	2589
PERLENSEC	2589
PERLENSEC_K	2589
pmNoAttOutIratHoCs57	2590
pmNoAttOutIratHoMulti	2590
pmNoAttOutIratHoSpeech	2590
pmNoAttOutIratHoStandalone	2590
pmNoAttOutSbHoSpeech	2590
pmNoFailOutIratHoCs57GsmFailure	2591

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoFailOutIratHoCs57ReturnOldChNotPhyChFail	2591
pmNoFailOutIratHoCs57ReturnOldChPhyChFail	2591
pmNoFailOutIratHoCs57UeRejection	2591
pmNoFailOutIratHoMultiGsmFailure	2591
pmNoFailOutIratHoMultiReturnOldChNotPhyChFail	2591
pmNoFailOutIratHoMultiReturnOldChPhyChFail	2591
pmNoFailOutIratHoMultiUeRejection	2591
pmNoFailOutIratHoSpeechGsmFailure	2591
pmNoFailOutIratHoSpeechReturnOldChNotPhyChFail	2592
pmNoFailOutIratHoSpeechReturnOldChPhyChFail	2592
pmNoFailOutIratHoSpeechUeRejection	2592
pmNoFailOutIratHoStandaloneGsmFailure	2592
pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail	2592
pmNoFailOutIratHoStandaloneReturnOldChPhyChFail	2592
pmNoFailOutIratHoStandaloneUeRejection	2592
pmNoFailOutSbHoSpeechGsmFailure	2593
pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail	2593
pmNoFailOutSbHoSpeechReturnOldChPhyChFail	2593
pmNoFailOutSbHoSpeechUeRejection	2593
pmNoOutIratCcAtt	2594
pmNoOutIratCcReturnOldCh	2594
pmNoOutIratCcSuccess	2594
pmNoSuccessOutIratHoCs57	2595
pmNoSuccessOutIratHoMulti	2595
pmNoSuccessOutIratHoSpeech	2595
pmNoSuccessOutIratHoStandalone	2595
pmNoSuccessOutSbHoSpeech	2595
priority	2595
qOffset1sn	2596
rac	2596
racc	2596
userLabel	2597
GttService Primitive Calculations	2597
GRAPHmultiLineSeparator	2597
NUMDAYS	2597
NUMHOURS	2597
p_Seizures_Sucess_Rate	2597
GttService Peg Counts	2598
PERLENSEC	2598
pmForcedRelease	2598
pmNormalRelease	2598
pmTotalSeizures	2599
pmUnsuccSeizures	2599
RNC_RELEASE	2599
HsDschResources Primitive Calculations	2599
GRAPHmultiLineSeparator	2600
NUMDAYS	2600
NUMHOURS	2600
pmTransmCarrierPowerNonHsP5MD_01	2600
pmTransmCarrierPowerNonHsP5MD_02	2600

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTransmCarrierPowerNonHsP5MD_03	2600
pmTransmCarrierPowerNonHsP5MD_04	2601
pmTransmCarrierPowerNonHsP5MD_05	2601
pmTransmCarrierPowerNonHsP5MD_06	2601
pmTransmCarrierPowerNonHsP5MD_07	2601
pmTransmCarrierPowerNonHsP5MD_08	2601
pmTransmCarrierPowerNonHsP5MD_09	2602
pmTransmCarrierPowerNonHsP5MD_10	2602
pmTransmCarrierPowerNonHsP5MD_11	2602
pmTransmCarrierPowerNonHsP5MD_12	2602
pmTransmCarrierPowerNonHsP5MD_13	2602
pmTransmCarrierPowerNonHsP5MD_14	2603
pmTransmCarrierPowerNonHsP5MD_15	2603
pmTransmCarrierPowerNonHsP5MD_16	2603
pmTransmCarrierPowerNonHsP5MD_17	2603
pmTransmCarrierPowerNonHsP5MD_18	2603
pmTransmCarrierPowerNonHsP5MD_19	2604
pmTransmCarrierPowerNonHsP5MD_20	2604
pmTransmCarrierPowerNonHsP5MD_21	2604
pmTransmCarrierPowerNonHsP5MD_22	2604
pmTransmCarrierPowerNonHsP5MD_23	2604
pmTransmCarrierPowerNonHsP5MD_24	2605
pmTransmCarrierPowerNonHsP5MD_25	2605
pmTransmCarrierPowerNonHsP5MD_26	2605
pmTransmCarrierPowerNonHsP5MD_27	2605
pmTransmCarrierPowerNonHsP5MD_28	2605
pmTransmCarrierPowerNonHsP5MD_29	2606
pmTransmCarrierPowerNonHsP5MD_30	2606
pmTransmCarrierPowerNonHsP5MD_31	2606
pmTransmCarrierPowerNonHsP5MD_32	2606
pmTransmCarrierPowerNonHsP5MD_33	2606
pmTransmCarrierPowerNonHsP5MD_34	2607
pmTransmCarrierPowerNonHsP5MD_35	2607
pmTransmCarrierPowerNonHsP5MD_36	2607
pmTransmCarrierPowerNonHsP5MD_37	2607
pmTransmCarrierPowerNonHsP5MD_38	2607
pmTransmCarrierPowerNonHsP5MD_39	2608
pmTransmCarrierPowerNonHsP5MD_40	2608
pmTransmCarrierPowerNonHsP5MD_41	2608
pmTransmCarrierPowerNonHsP5MD_42	2608
pmTransmCarrierPowerNonHsP5MD_43	2608
pmTransmCarrierPowerNonHsP5MD_44	2609
pmTransmCarrierPowerNonHsP5MD_45	2609
pmTransmCarrierPowerNonHsP5MD_46	2609
pmTransmCarrierPowerNonHsP5MD_47	2609
pmTransmCarrierPowerNonHsP5MD_48	2609
pmTransmCarrierPowerNonHsP5MD_49	2610
pmTransmCarrierPowerNonHsP5MD_50	2610
HsDschResources Peg Counts	2610
NodeB_RELEASE	2610
PERLENSEC	2610

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC_K	2611
pmAck16Qam_01	2611
pmAck16Qam_02	2611
pmAck16Qam_03	2612
pmAck16Qam_04	2612
pmAck16Qam_05	2612
pmAck16Qam_06	2613
pmAck16Qam_07	2613
pmAck16Qam_08	2613
pmAck16Qam_09	2614
pmAck16Qam_10	2614
pmAck16Qam_11	2615
pmAck16Qam_12	2615
pmAck16Qam_13	2615
pmAck16Qam_14	2616
pmAck16Qam_15	2616
pmAck16Qam_16	2616
pmAck16Qam_17	2617
pmAck16Qam_18	2617
pmAck16Qam_19	2617
pmAck16Qam_20	2618
pmAck16Qam_21	2618
pmAck16Qam_22	2619
pmAck16Qam_23	2619
pmAck16Qam_24	2619
pmAck16Qam_25	2620
pmAck16Qam_26	2620
pmAck16Qam_27	2620
pmAck16Qam_28	2621
pmAck16Qam_29	2621
pmAck16Qam_30	2621
pmAckQpsk_01	2622
pmAckQpsk_02	2622
pmAckQpsk_03	2623
pmAckQpsk_04	2623
pmAckQpsk_05	2623
pmAckQpsk_06	2624
pmAckQpsk_07	2624
pmAckQpsk_08	2624
pmAckQpsk_09	2625
pmAckQpsk_10	2625
pmAckQpsk_11	2625
pmAckQpsk_12	2626
pmAckQpsk_13	2626
pmAckQpsk_14	2627
pmAckQpsk_15	2627
pmAckQpsk_16	2627
pmAckQpsk_17	2628
pmAckQpsk_18	2628
pmAckQpsk_19	2628
pmAckQpsk_20	2629

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAckQpsk_21	2629
pmAckQpsk_22	2629
pmAckQpsk_23	2630
pmAckQpsk_24	2630
pmAckQpsk_25	2631
pmAckQpsk_26	2631
pmAckQpsk_27	2631
pmAckQpsk_28	2632
pmAckQpsk_29	2632
pmAckQpsk_30	2632
pmAckReceived	2633
pmAverageUserRate_0	2633
pmAverageUserRate_1	2633
pmAverageUserRate_10	2634
pmAverageUserRate_11	2634
pmAverageUserRate_12	2634
pmAverageUserRate_13	2635
pmAverageUserRate_14	2635
pmAverageUserRate_15	2635
pmAverageUserRate_16	2636
pmAverageUserRate_17	2636
pmAverageUserRate_2	2636
pmAverageUserRate_3	2637
pmAverageUserRate_4	2637
pmAverageUserRate_5	2637
pmAverageUserRate_6	2638
pmAverageUserRate_7	2638
pmAverageUserRate_8	2638
pmAverageUserRate_9	2639
pmDelayDistrSpi00_01	2639
pmDelayDistrSpi00_02	2639
pmDelayDistrSpi00_03	2640
pmDelayDistrSpi00_04	2640
pmDelayDistrSpi00_05	2641
pmDelayDistrSpi00_06	2641
pmDelayDistrSpi00_07	2642
pmDelayDistrSpi00_08	2642
pmDelayDistrSpi00_09	2642
pmDelayDistrSpi00_10	2643
pmDelayDistrSpi00_11	2643
pmDelayDistrSpi01_01	2644
pmDelayDistrSpi01_02	2644
pmDelayDistrSpi01_03	2644
pmDelayDistrSpi01_04	2645
pmDelayDistrSpi01_05	2645
pmDelayDistrSpi01_06	2646
pmDelayDistrSpi01_07	2646
pmDelayDistrSpi01_08	2647
pmDelayDistrSpi01_09	2647
pmDelayDistrSpi01_10	2647
pmDelayDistrSpi01_11	2648

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDelayDistrSpi02_01	2648
pmDelayDistrSpi02_02	2649
pmDelayDistrSpi02_03	2649
pmDelayDistrSpi02_04	2649
pmDelayDistrSpi02_05	2650
pmDelayDistrSpi02_06	2650
pmDelayDistrSpi02_07	2651
pmDelayDistrSpi02_08	2651
pmDelayDistrSpi02_09	2652
pmDelayDistrSpi02_10	2652
pmDelayDistrSpi02_11	2652
pmDelayDistrSpi03_01	2653
pmDelayDistrSpi03_02	2653
pmDelayDistrSpi03_03	2654
pmDelayDistrSpi03_04	2654
pmDelayDistrSpi03_05	2654
pmDelayDistrSpi03_06	2655
pmDelayDistrSpi03_07	2655
pmDelayDistrSpi03_08	2656
pmDelayDistrSpi03_09	2656
pmDelayDistrSpi03_10	2657
pmDelayDistrSpi03_11	2657
pmDelayDistrSpi04_01	2657
pmDelayDistrSpi04_02	2658
pmDelayDistrSpi04_03	2658
pmDelayDistrSpi04_04	2659
pmDelayDistrSpi04_05	2659
pmDelayDistrSpi04_06	2659
pmDelayDistrSpi04_07	2660
pmDelayDistrSpi04_08	2660
pmDelayDistrSpi04_09	2661
pmDelayDistrSpi04_10	2661
pmDelayDistrSpi04_11	2662
pmDelayDistrSpi05_01	2662
pmDelayDistrSpi05_02	2662
pmDelayDistrSpi05_03	2663
pmDelayDistrSpi05_04	2663
pmDelayDistrSpi05_05	2664
pmDelayDistrSpi05_06	2664
pmDelayDistrSpi05_07	2664
pmDelayDistrSpi05_08	2665
pmDelayDistrSpi05_09	2665
pmDelayDistrSpi05_10	2666
pmDelayDistrSpi05_11	2666
pmDelayDistrSpi06_01	2667
pmDelayDistrSpi06_02	2667
pmDelayDistrSpi06_03	2667
pmDelayDistrSpi06_04	2668
pmDelayDistrSpi06_05	2668
pmDelayDistrSpi06_06	2669
pmDelayDistrSpi06_07	2669

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDelayDistrSpi06_08	2669
pmDelayDistrSpi06_09	2670
pmDelayDistrSpi06_10	2670
pmDelayDistrSpi06_11	2671
pmDelayDistrSpi07_01	2671
pmDelayDistrSpi07_02	2672
pmDelayDistrSpi07_03	2672
pmDelayDistrSpi07_04	2672
pmDelayDistrSpi07_05	2673
pmDelayDistrSpi07_06	2673
pmDelayDistrSpi07_07	2674
pmDelayDistrSpi07_08	2674
pmDelayDistrSpi07_09	2674
pmDelayDistrSpi07_10	2675
pmDelayDistrSpi07_11	2675
pmDelayDistrSpi08_01	2676
pmDelayDistrSpi08_02	2676
pmDelayDistrSpi08_03	2677
pmDelayDistrSpi08_04	2677
pmDelayDistrSpi08_05	2677
pmDelayDistrSpi08_06	2678
pmDelayDistrSpi08_07	2678
pmDelayDistrSpi08_08	2679
pmDelayDistrSpi08_09	2679
pmDelayDistrSpi08_10	2679
pmDelayDistrSpi08_11	2680
pmDelayDistrSpi09_01	2680
pmDelayDistrSpi09_02	2681
pmDelayDistrSpi09_03	2681
pmDelayDistrSpi09_04	2682
pmDelayDistrSpi09_05	2682
pmDelayDistrSpi09_06	2682
pmDelayDistrSpi09_07	2683
pmDelayDistrSpi09_08	2683
pmDelayDistrSpi09_09	2684
pmDelayDistrSpi09_10	2684
pmDelayDistrSpi09_11	2684
pmDelayDistrSpi10_01	2685
pmDelayDistrSpi10_02	2685
pmDelayDistrSpi10_03	2686
pmDelayDistrSpi10_04	2686
pmDelayDistrSpi10_05	2687
pmDelayDistrSpi10_06	2687
pmDelayDistrSpi10_07	2687
pmDelayDistrSpi10_08	2688
pmDelayDistrSpi10_09	2688
pmDelayDistrSpi10_10	2689
pmDelayDistrSpi10_11	2689
pmDelayDistrSpi11_01	2689
pmDelayDistrSpi11_02	2690
pmDelayDistrSpi11_03	2690

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDelayDistrSpi11_04	2691
pmDelayDistrSpi11_05	2691
pmDelayDistrSpi11_06	2692
pmDelayDistrSpi11_07	2692
pmDelayDistrSpi11_08	2692
pmDelayDistrSpi11_09	2693
pmDelayDistrSpi11_10	2693
pmDelayDistrSpi11_11	2694
pmDelayDistrSpi12_01	2694
pmDelayDistrSpi12_02	2694
pmDelayDistrSpi12_03	2695
pmDelayDistrSpi12_04	2695
pmDelayDistrSpi12_05	2696
pmDelayDistrSpi12_06	2696
pmDelayDistrSpi12_07	2697
pmDelayDistrSpi12_08	2697
pmDelayDistrSpi12_09	2697
pmDelayDistrSpi12_10	2698
pmDelayDistrSpi12_11	2698
pmDelayDistrSpi13_01	2699
pmDelayDistrSpi13_02	2699
pmDelayDistrSpi13_03	2699
pmDelayDistrSpi13_04	2700
pmDelayDistrSpi13_05	2700
pmDelayDistrSpi13_06	2701
pmDelayDistrSpi13_07	2701
pmDelayDistrSpi13_08	2702
pmDelayDistrSpi13_09	2702
pmDelayDistrSpi13_10	2702
pmDelayDistrSpi13_11	2703
pmDelayDistrSpi14_01	2703
pmDelayDistrSpi14_02	2704
pmDelayDistrSpi14_03	2704
pmDelayDistrSpi14_04	2704
pmDelayDistrSpi14_05	2705
pmDelayDistrSpi14_06	2705
pmDelayDistrSpi14_07	2706
pmDelayDistrSpi14_08	2706
pmDelayDistrSpi14_09	2707
pmDelayDistrSpi14_10	2707
pmDelayDistrSpi14_11	2707
pmDelayDistrSpi15_01	2708
pmDelayDistrSpi15_02	2708
pmDelayDistrSpi15_03	2709
pmDelayDistrSpi15_04	2709
pmDelayDistrSpi15_05	2709
pmDelayDistrSpi15_06	2710
pmDelayDistrSpi15_07	2710
pmDelayDistrSpi15_08	2711
pmDelayDistrSpi15_09	2711
pmDelayDistrSpi15_10	2712

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDelayDistrSpi15_11	2712
pmIubMacdPduCellReceivedBits	2712
pmNackReceived	2713
pmNoActiveSubFrames	2713
pmNoActSubFrmsSpi00	2713
pmNoActSubFrmsSpi01	2714
pmNoActSubFrmsSpi02	2714
pmNoActSubFrmsSpi03	2714
pmNoActSubFrmsSpi04	2715
pmNoActSubFrmsSpi05	2715
pmNoActSubFrmsSpi06	2716
pmNoActSubFrmsSpi07	2716
pmNoActSubFrmsSpi08	2716
pmNoActSubFrmsSpi09	2717
pmNoActSubFrmsSpi10	2717
pmNoActSubFrmsSpi11	2718
pmNoActSubFrmsSpi12	2718
pmNoActSubFrmsSpi13	2718
pmNoActSubFrmsSpi14	2719
pmNoActSubFrmsSpi15	2719
pmNoInactiveRequiredSubFrames	2719
pmNoInactReqSubFrmsSpi00	2720
pmNoInactReqSubFrmsSpi01	2720
pmNoInactReqSubFrmsSpi02	2721
pmNoInactReqSubFrmsSpi03	2721
pmNoInactReqSubFrmsSpi04	2721
pmNoInactReqSubFrmsSpi05	2722
pmNoInactReqSubFrmsSpi06	2722
pmNoInactReqSubFrmsSpi07	2722
pmNoInactReqSubFrmsSpi08	2723
pmNoInactReqSubFrmsSpi09	2723
pmNoInactReqSubFrmsSpi10	2723
pmNoInactReqSubFrmsSpi11	2724
pmNoInactReqSubFrmsSpi12	2724
pmNoInactReqSubFrmsSpi13	2725
pmNoInactReqSubFrmsSpi14	2725
pmNoInactReqSubFrmsSpi15	2725
pmNoOfHsUsersPerTti_00	2726
pmNoOfHsUsersPerTti_01	2726
pmNoOfHsUsersPerTti_02	2726
pmNoOfHsUsersPerTti_03	2727
pmNoOfHsUsersPerTti_04	2727
pmRemainingResourceCheck_00	2727
pmRemainingResourceCheck_01	2728
pmRemainingResourceCheck_02	2728
pmReportedCqi_0	2728
pmReportedCqi_1	2729
pmReportedCqi_10	2729
pmReportedCqi_11	2729
pmReportedCqi_12	2730
pmReportedCqi_13	2730

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmReportedCqi_14	2730
pmReportedCqi_15	2730
pmReportedCqi_16	2731
pmReportedCqi_17	2731
pmReportedCqi_18	2731
pmReportedCqi_19	2732
pmReportedCqi_2	2732
pmReportedCqi_20	2732
pmReportedCqi_21	2733
pmReportedCqi_22	2733
pmReportedCqi_23	2733
pmReportedCqi_24	2734
pmReportedCqi_25	2734
pmReportedCqi_26	2734
pmReportedCqi_27	2734
pmReportedCqi_28	2735
pmReportedCqi_29	2735
pmReportedCqi_3	2735
pmReportedCqi_30	2736
pmReportedCqi_31	2736
pmReportedCqi_4	2736
pmReportedCqi_5	2737
pmReportedCqi_6	2737
pmReportedCqi_7	2737
pmReportedCqi_8	2738
pmReportedCqi_9	2738
pmSampleNumHsPdschCodesAdded	2738
pmSumAkedBits	2739
pmSumAkedBitsSpi00	2739
pmSumAkedBitsSpi01	2739
pmSumAkedBitsSpi02	2740
pmSumAkedBitsSpi03	2740
pmSumAkedBitsSpi04	2740
pmSumAkedBitsSpi05	2741
pmSumAkedBitsSpi06	2741
pmSumAkedBitsSpi07	2741
pmSumAkedBitsSpi08	2742
pmSumAkedBitsSpi09	2742
pmSumAkedBitsSpi10	2743
pmSumAkedBitsSpi11	2743
pmSumAkedBitsSpi12	2743
pmSumAkedBitsSpi13	2744
pmSumAkedBitsSpi14	2744
pmSumAkedBitsSpi15	2744
pmSumDelaySpi00	2745
pmSumDelaySpi01	2745
pmSumDelaySpi02	2745
pmSumDelaySpi03	2746
pmSumDelaySpi04	2746
pmSumDelaySpi05	2747
pmSumDelaySpi06	2747

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumDelaySpi07	2747
pmSumDelaySpi08	2748
pmSumDelaySpi09	2748
pmSumDelaySpi10	2749
pmSumDelaySpi11	2749
pmSumDelaySpi12	2749
pmSumDelaySpi13	2750
pmSumDelaySpi14	2750
pmSumDelaySpi15	2750
pmSumJitterSpi00	2751
pmSumJitterSpi01	2751
pmSumJitterSpi02	2752
pmSumJitterSpi03	2752
pmSumJitterSpi04	2752
pmSumJitterSpi05	2753
pmSumJitterSpi06	2753
pmSumJitterSpi07	2754
pmSumJitterSpi08	2754
pmSumJitterSpi09	2754
pmSumJitterSpi10	2755
pmSumJitterSpi11	2755
pmSumJitterSpi12	2756
pmSumJitterSpi13	2756
pmSumJitterSpi14	2756
pmSumJitterSpi15	2757
pmSumNonEmptyUserBuffers	2757
pmSumNonEmUsrBuffSpi00	2758
pmSumNonEmUsrBuffSpi01	2758
pmSumNonEmUsrBuffSpi02	2758
pmSumNonEmUsrBuffSpi03	2759
pmSumNonEmUsrBuffSpi04	2759
pmSumNonEmUsrBuffSpi05	2759
pmSumNonEmUsrBuffSpi06	2760
pmSumNonEmUsrBuffSpi07	2760
pmSumNonEmUsrBuffSpi08	2761
pmSumNonEmUsrBuffSpi09	2761
pmSumNonEmUsrBuffSpi10	2761
pmSumNonEmUsrBuffSpi11	2762
pmSumNonEmUsrBuffSpi12	2762
pmSumNonEmUsrBuffSpi13	2763
pmSumNonEmUsrBuffSpi14	2763
pmSumNonEmUsrBuffSpi15	2763
pmSumNoOfUsersSpi00	2764
pmSumNoOfUsersSpi01	2764
pmSumNoOfUsersSpi02	2764
pmSumNoOfUsersSpi03	2765
pmSumNoOfUsersSpi04	2765
pmSumNoOfUsersSpi05	2766
pmSumNoOfUsersSpi06	2766
pmSumNoOfUsersSpi07	2766
pmSumNoOfUsersSpi08	2767

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumNoOfUsersSpi09	2767
pmSumNoOfUsersSpi10	2768
pmSumNoOfUsersSpi11	2768
pmSumNoOfUsersSpi12	2768
pmSumNoOfUsersSpi13	2769
pmSumNoOfUsersSpi14	2769
pmSumNoOfUsersSpi15	2769
pmSumNumHsPdschCodesAdded	2770
pmSumOfHsScchUsedPwr_00	2770
pmSumOfHsScchUsedPwr_01	2771
pmSumOfHsScchUsedPwr_02	2771
pmSumOfHsScchUsedPwr_03	2771
pmSumOfHsScchUsedPwr_04	2772
pmSumOfHsScchUsedPwr_05	2772
pmSumOfHsScchUsedPwr_06	2772
pmSumOfHsScchUsedPwr_07	2773
pmSumOfHsScchUsedPwr_08	2773
pmSumOfHsScchUsedPwr_09	2773
pmSumOfHsScchUsedPwr_10	2774
pmSumOfHsScchUsedPwr_100	2774
pmSumOfHsScchUsedPwr_101	2774
pmSumOfHsScchUsedPwr_102	2775
pmSumOfHsScchUsedPwr_11	2775
pmSumOfHsScchUsedPwr_12	2775
pmSumOfHsScchUsedPwr_13	2776
pmSumOfHsScchUsedPwr_14	2776
pmSumOfHsScchUsedPwr_15	2776
pmSumOfHsScchUsedPwr_16	2777
pmSumOfHsScchUsedPwr_17	2777
pmSumOfHsScchUsedPwr_18	2777
pmSumOfHsScchUsedPwr_19	2778
pmSumOfHsScchUsedPwr_20	2778
pmSumOfHsScchUsedPwr_21	2778
pmSumOfHsScchUsedPwr_22	2779
pmSumOfHsScchUsedPwr_23	2779
pmSumOfHsScchUsedPwr_24	2779
pmSumOfHsScchUsedPwr_25	2780
pmSumOfHsScchUsedPwr_26	2780
pmSumOfHsScchUsedPwr_27	2780
pmSumOfHsScchUsedPwr_28	2781
pmSumOfHsScchUsedPwr_29	2781
pmSumOfHsScchUsedPwr_30	2781
pmSumOfHsScchUsedPwr_31	2782
pmSumOfHsScchUsedPwr_32	2782
pmSumOfHsScchUsedPwr_33	2782
pmSumOfHsScchUsedPwr_34	2783
pmSumOfHsScchUsedPwr_35	2783
pmSumOfHsScchUsedPwr_36	2783
pmSumOfHsScchUsedPwr_37	2784
pmSumOfHsScchUsedPwr_38	2784
pmSumOfHsScchUsedPwr_39	2784

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumOfHsScchUsedPwr_40	2785
pmSumOfHsScchUsedPwr_41	2785
pmSumOfHsScchUsedPwr_42	2785
pmSumOfHsScchUsedPwr_43	2786
pmSumOfHsScchUsedPwr_44	2786
pmSumOfHsScchUsedPwr_45	2786
pmSumOfHsScchUsedPwr_46	2787
pmSumOfHsScchUsedPwr_47	2787
pmSumOfHsScchUsedPwr_48	2787
pmSumOfHsScchUsedPwr_49	2788
pmSumOfHsScchUsedPwr_50	2788
pmSumOfHsScchUsedPwr_51	2788
pmSumOfHsScchUsedPwr_52	2789
pmSumOfHsScchUsedPwr_53	2789
pmSumOfHsScchUsedPwr_54	2789
pmSumOfHsScchUsedPwr_55	2790
pmSumOfHsScchUsedPwr_56	2790
pmSumOfHsScchUsedPwr_57	2790
pmSumOfHsScchUsedPwr_58	2791
pmSumOfHsScchUsedPwr_59	2791
pmSumOfHsScchUsedPwr_60	2791
pmSumOfHsScchUsedPwr_61	2792
pmSumOfHsScchUsedPwr_62	2792
pmSumOfHsScchUsedPwr_63	2792
pmSumOfHsScchUsedPwr_64	2793
pmSumOfHsScchUsedPwr_65	2793
pmSumOfHsScchUsedPwr_66	2793
pmSumOfHsScchUsedPwr_67	2794
pmSumOfHsScchUsedPwr_68	2794
pmSumOfHsScchUsedPwr_69	2794
pmSumOfHsScchUsedPwr_70	2795
pmSumOfHsScchUsedPwr_71	2795
pmSumOfHsScchUsedPwr_72	2795
pmSumOfHsScchUsedPwr_73	2796
pmSumOfHsScchUsedPwr_74	2796
pmSumOfHsScchUsedPwr_75	2796
pmSumOfHsScchUsedPwr_76	2797
pmSumOfHsScchUsedPwr_77	2797
pmSumOfHsScchUsedPwr_78	2797
pmSumOfHsScchUsedPwr_79	2798
pmSumOfHsScchUsedPwr_80	2798
pmSumOfHsScchUsedPwr_81	2798
pmSumOfHsScchUsedPwr_82	2799
pmSumOfHsScchUsedPwr_83	2799
pmSumOfHsScchUsedPwr_84	2799
pmSumOfHsScchUsedPwr_85	2800
pmSumOfHsScchUsedPwr_86	2800
pmSumOfHsScchUsedPwr_87	2800
pmSumOfHsScchUsedPwr_88	2801
pmSumOfHsScchUsedPwr_89	2801
pmSumOfHsScchUsedPwr_90	2801

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumOfHsScchUsedPwr_91	2802
pmSumOfHsScchUsedPwr_92	2802
pmSumOfHsScchUsedPwr_93	2802
pmSumOfHsScchUsedPwr_94	2803
pmSumOfHsScchUsedPwr_95	2803
pmSumOfHsScchUsedPwr_96	2803
pmSumOfHsScchUsedPwr_97	2804
pmSumOfHsScchUsedPwr_98	2804
pmSumOfHsScchUsedPwr_99	2804
pmSumTransmittedBits	2805
pmSumTransmittedBitsSpi00	2805
pmSumTransmittedBitsSpi01	2805
pmSumTransmittedBitsSpi02	2806
pmSumTransmittedBitsSpi03	2806
pmSumTransmittedBitsSpi04	2806
pmSumTransmittedBitsSpi05	2807
pmSumTransmittedBitsSpi06	2807
pmSumTransmittedBitsSpi07	2807
pmSumTransmittedBitsSpi08	2808
pmSumTransmittedBitsSpi09	2808
pmSumTransmittedBitsSpi10	2808
pmSumTransmittedBitsSpi11	2809
pmSumTransmittedBitsSpi12	2809
pmSumTransmittedBitsSpi13	2810
pmSumTransmittedBitsSpi14	2810
pmSumTransmittedBitsSpi15	2810
pmTransmCarrierPowerNonHsP5MD_00	2811
pmTransmCarrierPowerNonHsP5MD_51	2811
pmTransmittedCarrierPowerHs_01	2811
pmTransmittedCarrierPowerHs_02	2812
pmTransmittedCarrierPowerHs_03	2812
pmTransmittedCarrierPowerHs_04	2812
pmTransmittedCarrierPowerHs_05	2813
pmTransmittedCarrierPowerHs_06	2813
pmTransmittedCarrierPowerHs_07	2814
pmTransmittedCarrierPowerHs_08	2814
pmTransmittedCarrierPowerHs_09	2814
pmTransmittedCarrierPowerHs_10	2815
pmTransmittedCarrierPowerHs_11	2815
pmTransmittedCarrierPowerHs_12	2815
pmTransmittedCarrierPowerHs_13	2816
pmTransmittedCarrierPowerHs_14	2816
pmTransmittedCarrierPowerHs_15	2816
pmTransmittedCarrierPowerHs_16	2817
pmTransmittedCarrierPowerHs_17	2817
pmTransmittedCarrierPowerHs_18	2818
pmTransmittedCarrierPowerHs_19	2818
pmTransmittedCarrierPowerHs_20	2818
pmTransmittedCarrierPowerHs_21	2819
pmTransmittedCarrierPowerHs_22	2819
pmTransmittedCarrierPowerHs_23	2819

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTransmittedCarrierPowerHs_24	2820
pmTransmittedCarrierPowerHs_25	2820
pmTransmittedCarrierPowerHs_26	2820
pmTransmittedCarrierPowerHs_27	2821
pmTransmittedCarrierPowerHs_28	2821
pmTransmittedCarrierPowerHs_29	2822
pmTransmittedCarrierPowerHs_30	2822
pmTransmittedCarrierPowerHs_31	2822
pmTransmittedCarrierPowerHs_32	2823
pmTransmittedCarrierPowerHs_33	2823
pmTransmittedCarrierPowerHs_34	2823
pmTransmittedCarrierPowerHs_35	2824
pmTransmittedCarrierPowerHs_36	2824
pmTransmittedCarrierPowerHs_37	2824
pmTransmittedCarrierPowerHs_38	2825
pmTransmittedCarrierPowerHs_39	2825
pmTransmittedCarrierPowerHs_40	2826
pmTransmittedCarrierPowerHs_41	2826
pmTransmittedCarrierPowerHs_42	2826
pmTransmittedCarrierPowerHs_43	2827
pmTransmittedCarrierPowerHs_44	2827
pmTransmittedCarrierPowerHs_45	2827
pmTransmittedCarrierPowerHs_46	2828
pmTransmittedCarrierPowerHs_47	2828
pmTransmittedCarrierPowerHs_48	2828
pmTransmittedCarrierPowerHs_49	2829
pmTransmittedCarrierPowerHs_50	2829
pmTransmittedCarrierPowerHs_51	2830
pmTransmittedCarrierPowerHs_52	2830
pmTransmittedCarrierPowerNonHs_000	2830
pmTransmittedCarrierPowerNonHs_001	2831
pmTransmittedCarrierPowerNonHs_002	2831
pmTransmittedCarrierPowerNonHs_003	2831
pmTransmittedCarrierPowerNonHs_004	2832
pmTransmittedCarrierPowerNonHs_005	2832
pmTransmittedCarrierPowerNonHs_006	2832
pmTransmittedCarrierPowerNonHs_007	2833
pmTransmittedCarrierPowerNonHs_008	2833
pmTransmittedCarrierPowerNonHs_009	2834
pmTransmittedCarrierPowerNonHs_010	2834
pmTransmittedCarrierPowerNonHs_011	2834
pmTransmittedCarrierPowerNonHs_012	2835
pmTransmittedCarrierPowerNonHs_013	2835
pmTransmittedCarrierPowerNonHs_014	2835
pmTransmittedCarrierPowerNonHs_015	2836
pmTransmittedCarrierPowerNonHs_016	2836
pmTransmittedCarrierPowerNonHs_017	2836
pmTransmittedCarrierPowerNonHs_018	2837
pmTransmittedCarrierPowerNonHs_019	2837
pmTransmittedCarrierPowerNonHs_020	2838
pmTransmittedCarrierPowerNonHs_021	2838

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTransmittedCarrierPowerNonHs_022	2838
pmTransmittedCarrierPowerNonHs_023	2839
pmTransmittedCarrierPowerNonHs_024	2839
pmTransmittedCarrierPowerNonHs_025	2839
pmTransmittedCarrierPowerNonHs_026	2840
pmTransmittedCarrierPowerNonHs_027	2840
pmTransmittedCarrierPowerNonHs_028	2840
pmTransmittedCarrierPowerNonHs_029	2841
pmTransmittedCarrierPowerNonHs_030	2841
pmTransmittedCarrierPowerNonHs_031	2842
pmTransmittedCarrierPowerNonHs_032	2842
pmTransmittedCarrierPowerNonHs_033	2842
pmTransmittedCarrierPowerNonHs_034	2843
pmTransmittedCarrierPowerNonHs_035	2843
pmTransmittedCarrierPowerNonHs_036	2843
pmTransmittedCarrierPowerNonHs_037	2844
pmTransmittedCarrierPowerNonHs_038	2844
pmTransmittedCarrierPowerNonHs_039	2844
pmTransmittedCarrierPowerNonHs_040	2845
pmTransmittedCarrierPowerNonHs_041	2845
pmTransmittedCarrierPowerNonHs_042	2846
pmTransmittedCarrierPowerNonHs_043	2846
pmTransmittedCarrierPowerNonHs_044	2846
pmTransmittedCarrierPowerNonHs_045	2847
pmTransmittedCarrierPowerNonHs_046	2847
pmTransmittedCarrierPowerNonHs_047	2847
pmTransmittedCarrierPowerNonHs_048	2848
pmTransmittedCarrierPowerNonHs_049	2848
pmTransmittedCarrierPowerNonHs_050	2848
pmTransmittedCarrierPowerNonHs_051	2849
pmTransmittedCarrierPowerNonHs_052	2849
pmTransmittedCarrierPowerNonHs_053	2850
pmTransmittedCarrierPowerNonHs_054	2850
pmTransmittedCarrierPowerNonHs_055	2850
pmTransmittedCarrierPowerNonHs_056	2851
pmTransmittedCarrierPowerNonHs_057	2851
pmTransmittedCarrierPowerNonHs_058	2851
pmTransmittedCarrierPowerNonHs_059	2852
pmTransmittedCarrierPowerNonHs_060	2852
pmTransmittedCarrierPowerNonHs_061	2852
pmTransmittedCarrierPowerNonHs_062	2853
pmTransmittedCarrierPowerNonHs_063	2853
pmTransmittedCarrierPowerNonHs_064	2854
pmTransmittedCarrierPowerNonHs_065	2854
pmTransmittedCarrierPowerNonHs_066	2854
pmTransmittedCarrierPowerNonHs_067	2855
pmTransmittedCarrierPowerNonHs_068	2855
pmTransmittedCarrierPowerNonHs_069	2855
pmTransmittedCarrierPowerNonHs_070	2856
pmTransmittedCarrierPowerNonHs_071	2856
pmTransmittedCarrierPowerNonHs_072	2856

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTransmittedCarrierPowerNonHs_073	2857
pmTransmittedCarrierPowerNonHs_074	2857
pmTransmittedCarrierPowerNonHs_075	2858
pmTransmittedCarrierPowerNonHs_076	2858
pmTransmittedCarrierPowerNonHs_077	2858
pmTransmittedCarrierPowerNonHs_078	2859
pmTransmittedCarrierPowerNonHs_079	2859
pmTransmittedCarrierPowerNonHs_080	2859
pmTransmittedCarrierPowerNonHs_081	2860
pmTransmittedCarrierPowerNonHs_082	2860
pmTransmittedCarrierPowerNonHs_083	2860
pmTransmittedCarrierPowerNonHs_084	2861
pmTransmittedCarrierPowerNonHs_085	2861
pmTransmittedCarrierPowerNonHs_086	2862
pmTransmittedCarrierPowerNonHs_087	2862
pmTransmittedCarrierPowerNonHs_088	2862
pmTransmittedCarrierPowerNonHs_089	2863
pmTransmittedCarrierPowerNonHs_090	2863
pmTransmittedCarrierPowerNonHs_091	2863
pmTransmittedCarrierPowerNonHs_092	2864
pmTransmittedCarrierPowerNonHs_093	2864
pmTransmittedCarrierPowerNonHs_094	2864
pmTransmittedCarrierPowerNonHs_095	2865
pmTransmittedCarrierPowerNonHs_096	2865
pmTransmittedCarrierPowerNonHs_097	2866
pmTransmittedCarrierPowerNonHs_098	2866
pmTransmittedCarrierPowerNonHs_099	2866
pmTransmittedCarrierPowerNonHs_100	2867
pmTransmittedCarrierPowerNonHs_101	2867
pmTransmittedCarrierPowerNonHs_102	2867
pmTxCarrierPowerNonHsP6_00	2868
pmTxCarrierPowerNonHsP6_01	2868
pmTxCarrierPowerNonHsP6_02	2868
pmTxCarrierPowerNonHsP6_03	2869
pmTxCarrierPowerNonHsP6_04	2869
pmTxCarrierPowerNonHsP6_05	2869
pmTxCarrierPowerNonHsP6_06	2870
pmTxCarrierPowerNonHsP6_07	2870
pmTxCarrierPowerNonHsP6_08	2870
pmTxCarrierPowerNonHsP6_09	2871
pmTxCarrierPowerNonHsP6_10	2871
pmTxCarrierPowerNonHsP6_11	2871
pmTxCarrierPowerNonHsP6_12	2872
pmTxCarrierPowerNonHsP6_13	2872
pmTxCarrierPowerNonHsP6_14	2872
pmTxCarrierPowerNonHsP6_15	2873
pmTxCarrierPowerNonHsP6_16	2873
pmTxCarrierPowerNonHsP6_17	2873
pmTxCarrierPowerNonHsP6_18	2874
pmTxCarrierPowerNonHsP6_19	2874
pmTxCarrierPowerNonHsP6_20	2874

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTxCarrierPowerNonHsP6_21	2875
pmTxCarrierPowerNonHsP6_22	2875
pmTxCarrierPowerNonHsP6_23	2875
pmTxCarrierPowerNonHsP6_24	2876
pmTxCarrierPowerNonHsP6_25	2876
pmTxCarrierPowerNonHsP6_26	2876
pmTxCarrierPowerNonHsP6_27	2877
pmTxCarrierPowerNonHsP6_28	2877
pmTxCarrierPowerNonHsP6_29	2877
pmTxCarrierPowerNonHsP6_30	2878
pmTxCarrierPowerNonHsP6_31	2878
pmTxCarrierPowerNonHsP6_32	2878
pmTxCarrierPowerNonHsP6_33	2879
pmTxCarrierPowerNonHsP6_34	2879
pmTxCarrierPowerNonHsP6_35	2879
pmTxCarrierPowerNonHsP6_36	2880
pmTxCarrierPowerNonHsP6_37	2880
pmTxCarrierPowerNonHsP6_38	2880
pmTxCarrierPowerNonHsP6_39	2881
pmTxCarrierPowerNonHsP6_40	2881
pmTxCarrierPowerNonHsP6_41	2881
pmTxCarrierPowerNonHsP6_42	2882
pmTxCarrierPowerNonHsP6_43	2882
pmTxCarrierPowerNonHsP6_44	2882
pmTxCarrierPowerNonHsP6_45	2883
pmTxCarrierPowerNonHsP6_46	2883
pmTxCarrierPowerNonHsP6_47	2883
pmTxCarrierPowerNonHsP6_48	2884
pmTxCarrierPowerNonHsP6_49	2884
pmTxCarrierPowerNonHsP6_50	2884
pmTxCarrierPowerNonHsP6_51	2885
pmUsedCqi_0	2885
pmUsedCqi_1	2885
pmUsedCqi_10	2886
pmUsedCqi_11	2886
pmUsedCqi_12	2886
pmUsedCqi_13	2887
pmUsedCqi_14	2887
pmUsedCqi_15	2887
pmUsedCqi_16	2888
pmUsedCqi_17	2888
pmUsedCqi_18	2888
pmUsedCqi_19	2889
pmUsedCqi_2	2889
pmUsedCqi_20	2889
pmUsedCqi_21	2890
pmUsedCqi_22	2890
pmUsedCqi_23	2890
pmUsedCqi_24	2891
pmUsedCqi_25	2891
pmUsedCqi_26	2891

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUsedCqi_27	2892
pmUsedCqi_28	2892
pmUsedCqi_29	2892
pmUsedCqi_3	2893
pmUsedCqi_30	2893
pmUsedCqi_4	2893
pmUsedCqi_5	2894
pmUsedCqi_6	2894
pmUsedCqi_7	2894
pmUsedCqi_8	2895
pmUsedCqi_9	2895
pmUsedTbs16Qam_01	2895
pmUsedTbs16Qam_02	2896
pmUsedTbs16Qam_03	2896
pmUsedTbs16Qam_04	2896
pmUsedTbs16Qam_05	2897
pmUsedTbs16Qam_06	2897
pmUsedTbs16Qam_07	2898
pmUsedTbs16Qam_08	2898
pmUsedTbs16Qam_09	2898
pmUsedTbs16Qam_10	2899
pmUsedTbs16Qam_11	2899
pmUsedTbs16Qam_12	2899
pmUsedTbs16Qam_13	2900
pmUsedTbs16Qam_14	2900
pmUsedTbs16Qam_15	2900
pmUsedTbs16Qam_16	2901
pmUsedTbs16Qam_17	2901
pmUsedTbs16Qam_18	2902
pmUsedTbs16Qam_19	2902
pmUsedTbs16Qam_20	2902
pmUsedTbs16Qam_21	2903
pmUsedTbs16Qam_22	2903
pmUsedTbs16Qam_23	2903
pmUsedTbs16Qam_24	2904
pmUsedTbs16Qam_25	2904
pmUsedTbs16Qam_26	2904
pmUsedTbs16Qam_27	2905
pmUsedTbs16Qam_28	2905
pmUsedTbs16Qam_29	2906
pmUsedTbs16Qam_30	2906
pmUsedTbsQpsk_01	2906
pmUsedTbsQpsk_02	2907
pmUsedTbsQpsk_03	2907
pmUsedTbsQpsk_04	2907
pmUsedTbsQpsk_05	2908
pmUsedTbsQpsk_06	2908
pmUsedTbsQpsk_07	2908
pmUsedTbsQpsk_08	2909
pmUsedTbsQpsk_09	2909
pmUsedTbsQpsk_10	2910

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUsedTbsQpsk_11	2910
pmUsedTbsQpsk_12	2910
pmUsedTbsQpsk_13	2911
pmUsedTbsQpsk_14	2911
pmUsedTbsQpsk_15	2911
pmUsedTbsQpsk_16	2912
pmUsedTbsQpsk_17	2912
pmUsedTbsQpsk_18	2912
pmUsedTbsQpsk_19	2913
pmUsedTbsQpsk_20	2913
pmUsedTbsQpsk_21	2914
pmUsedTbsQpsk_22	2914
pmUsedTbsQpsk_23	2914
pmUsedTbsQpsk_24	2915
pmUsedTbsQpsk_25	2915
pmUsedTbsQpsk_26	2915
pmUsedTbsQpsk_27	2916
pmUsedTbsQpsk_28	2916
pmUsedTbsQpsk_29	2916
pmUsedTbsQpsk_30	2917
ImaGroup_NodeB Primitive Calculations	2917
GRAPHmultiLineSeparator	2917
NUMDAYS	2917
NUMHOURS	2918
ImaGroup_NodeB Peg Counts	2918
pmGrFc	2918
pmGrFcFe	2918
pmGrUasIma	2918
ImaGroup_RNC Primitive Calculations	2919
GRAPHmultiLineSeparator	2919
NUMDAYS	2919
NUMHOURS	2919
ImaGroup_RNC Peg Counts	2919
pmGrFc	2919
pmGrFcFe	2920
pmGrUasIma	2920
ImaLink_NodeB Primitive Calculations	2920
GRAPHmultiLineSeparator	2920
NUMDAYS	2921
NUMHOURS	2921
ImaLink_NodeB Peg Counts	2921
pmlvlma	2921
pmOiflma	2921
pmRxFc	2922
pmRxFcFe	2922
pmRxStuflma	2922
pmRxUuslma	2923
pmRxUuslmaFe	2923
pmSeslma	2923
pmSeslmaFe	2924

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTxFc	2924
pmTxFcFe	2924
pmTxStuflma	2925
pmTxUuslma	2925
pmTxUuslmaFe	2925
pmUaslma	2926
pmUaslmaFe	2926
ImaLink_RNC Primitive Calculations	2926
GRAPHmultiLineSeparator	2926
NUMDAYS	2926
NUMHOURS	2927
ImaLink_RNC Peg Counts	2927
pmlvlma	2927
pmOiflma	2927
pmRxFc	2927
pmRxFcFe	2928
pmRxStuflma	2928
pmRxUuslma	2928
pmRxUuslmaFe	2929
pmSeslma	2929
pmSeslmaFe	2929
pmTxFc	2930
pmTxFcFe	2930
pmTxStuflma	2930
pmTxUuslma	2931
pmTxUuslmaFe	2931
pmUaslma	2931
pmUaslmaFe	2932
ImBasicMessage Primitive Calculations	2932
GRAPHmultiLineSeparator	2932
NUMDAYS	2932
NUMHOURS	2932
p_IM_basic_message_success	2932
ImBasicMessage Peg Counts	2933
PERLENSEC	2933
pmCallAttempts	2933
pmFailedCallAttempts	2933
RNC_RELEASE	2934
ImDeviceService Primitive Calculations	2934
GRAPHmultiLineSeparator	2934
NUMDAYS	2934
NUMHOURS	2934
p_Seizures_Sucess_Rate	2934
ImDeviceService Peg Counts	2935
PERLENSEC	2935
RNC_RELEASE	2935
ImMessageComposition Primitive Calculations	2935
GRAPHmultiLineSeparator	2935
NUMDAYS	2935
NUMHOURS	2936

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

p_IM_basic_message_success	2936
ImMessageComposition Peg Counts	2936
PERLENSEC	2936
pmCallAttempts	2936
pmFailedCallAttempts	2937
RNC_RELEASE	2937
ImService Primitive Calculations	2937
GRAPHmultiLineSeparator	2937
NUMDAYS	2937
NUMHOURS	2937
p_Seizures_Sucess_Rate	2938
ImService Peg Counts	2938
PERLENSEC	2938
pmForcedRelease	2938
pmNormalRelease	2938
pmTotalSeizures	2939
pmUnsuccSeizures	2939
RNC_RELEASE	2939
ImVariableMessage Primitive Calculations	2940
GRAPHmultiLineSeparator	2940
IM_basic_message_success_%	2940
NUMDAYS	2940
NUMHOURS	2940
p_IM_basic_message_success	2940
ImVariableMessage Peg Counts	2940
PERLENSEC	2941
pmCallAttempts	2941
pmFailedCallAttempts	2941
RNC_RELEASE	2941
InmarsatDeviceService Primitive Calculations	2942
GRAPHmultiLineSeparator	2942
NUMDAYS	2942
NUMHOURS	2942
p_Seizures_Sucess_Rate	2942
InmarsatDeviceService Peg Counts	2942
PERLENSEC	2942
pmForcedRelease	2943
pmNormalRelease	2943
pmTotalSeizures	2943
pmUnsuccSeizures	2944
RNC_RELEASE	2944
IP_NodeB Primitive Calculations	2944
GRAPHmultiLineSeparator	2944
NUMDAYS	2944
NUMHOURS	2945
IP_NodeB Peg Counts	2945
NodeB_RELEASE	2945
PERLENSEC	2945
PERLENSEC_K	2945
pmNoOfHdrErrors	2946

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfIpAddrErrors	2946
pmNoOfIpFlowDatagrams	2946
pmNoOfIpInDiscards	2947
pmNoOfIpInReceives	2947
pmNoOfIpOutDiscards	2947
pmNoOfIpReasmOKs	2948
pmNoOfIpReasmReqds	2948
IP_RNC Primitive Calculations	2948
GRAPHmultiLineSeparator	2948
NUMDAYS	2948
NUMHOURS	2949
IP_RNC Peg Counts	2949
PERLENSEC	2949
PERLENSEC_K	2949
pmNoOfHdrErrors	2949
pmNoOfIpAddrErrors	2950
pmNoOfIpFlowDatagrams	2950
pmNoOfIpInDiscards	2950
pmNoOfIpInReceives	2951
pmNoOfIpOutDiscards	2951
pmNoOfIpReasmOKs	2951
pmNoOfIpReasmReqds	2952
RNC_RELEASE	2952
IpAccessHostGpb_NodeB Primitive Calculations	2952
GRAPHmultiLineSeparator	2952
NUMDAYS	2952
NUMHOURS	2953
p_Ratio_of_discarded_received_IP_datagrams	2953
p_Ratio_of_discarded_sent_IP_datagrams	2953
Sent_IP_datagrams	2953
IpAccessHostGpb_NodeB Peg Counts	2953
pmlcmpInDestUnreachs	2953
pmlcmpInEchoReps	2954
pmlcmpInEchos	2954
pmlcmpInErrors	2954
pmlcmpInMsgs	2955
pmlcmpInParamProbs	2955
pmlcmpInRedirects	2955
pmlcmpInSrcQuenchs	2955
pmlcmpInTimeExcds	2956
pmlcmpOutDestUnreachs	2956
pmlcmpOutEchoReps	2956
pmlcmpOutEchos	2957
pmlcmpOutErrors	2957
pmlcmpOutMsgs	2957
pmlcmpOutParamProbs	2958
pmlpFragCreates	2958
pmlpFragFails	2958
pmlpFragOKs	2959
pmlpInAddrErrors	2959

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmlpInDelivers	2959
pmlpInDiscards	2960
pmlpInHdrErrors	2960
pmlpInReceives	2960
pmlpInUnknownProtos	2961
pmlpOutDiscards	2961
pmlpOutRequests	2961
pmlpReasmFails	2962
pmlpReasmOKs	2962
pmlpReasmReqds	2962
IpAccessHostGpb_RNC Primitive Calculations	2963
GRAPHmultiLineSeparator	2963
NUMDAYS	2963
NUMHOURS	2963
p_Ratio_of_discarded_received_IP_datagrams	2963
p_Ratio_of_discarded_sent_IP_datagrams	2963
Sent_IP_datagrams	2964
IpAccessHostGpb_RNC Peg Counts	2964
pmlcmplnDestUnreachs	2964
pmlcmplnEchoReps	2964
pmlcmplnEchos	2964
pmlcmplnErrors	2965
pmlcmplnMsgs	2965
pmlcmplnParamProbs	2965
pmlcmplnRedirects	2966
pmlcmplnSrcQuenchs	2966
pmlcmplnTimeExcds	2966
pmlcmpOutDestUnreachs	2967
pmlcmpOutEchoReps	2967
pmlcmpOutEchos	2967
pmlcmpOutErrors	2968
pmlcmpOutMsgs	2968
pmlcmpOutParamProbs	2968
pmlpFragCreates	2969
pmlpFragFails	2969
pmlpFragOKs	2969
pmlpInAddrErrors	2970
pmlpInDelivers	2970
pmlpInDiscards	2970
pmlpInHdrErrors	2971
pmlpInReceives	2971
pmlpInUnknownProtos	2971
pmlpOutDiscards	2972
pmlpOutRequests	2972
pmlpReasmFails	2972
pmlpReasmOKs	2973
pmlpReasmReqds	2973
IpAccessHostMsb_NodeB Primitive Calculations	2973
GRAPHmultiLineSeparator	2973
NUMDAYS	2973

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	2974
IpAccessHostMsb_NodeB Peg Counts	2974
pmlcmpInDestUnreaches	2974
pmlcmpInErrors	2974
pmlcmpInMsgs	2974
pmlcmpOutDestUnreaches	2975
pmlcmpOutMsgs	2975
pmlpInAddrErrors	2975
pmlpInDelivers	2976
pmlpInHdrErrors	2976
pmlpInReceives	2976
pmlpInUnknownProtos	2977
pmlpOutRequests	2977
pmUdpInDatagrams	2977
pmUdpInErrors	2978
pmUdpNoPorts	2978
pmUdpOutDatagrams	2978
IpAccessHostMsb_RNC Primitive Calculations	2979
GRAPHmultiLineSeparator	2979
NUMDAYS	2979
NUMHOURS	2979
IpAccessHostMsb_RNC Peg Counts	2979
pmlcmpInDestUnreaches	2979
pmlcmpInErrors	2980
pmlcmpInMsgs	2980
pmlcmpOutDestUnreaches	2980
pmlcmpOutMsgs	2981
pmlpInAddrErrors	2981
pmlpInDelivers	2981
pmlpInHdrErrors	2982
pmlpInReceives	2982
pmlpInUnknownProtos	2982
pmlpOutRequests	2983
pmUdpInDatagrams	2983
pmUdpInErrors	2983
pmUdpNoPorts	2984
pmUdpOutDatagrams	2984
IpAccessHostSpb_NodeB Primitive Calculations	2984
GRAPHmultiLineSeparator	2984
NUMDAYS	2985
NUMHOURS	2985
IpAccessHostSpb_NodeB Peg Counts	2985
PERLENSEC	2985
PERLENSEC_K	2985
pmlcmpInDestUnreaches	2986
pmlcmpInEchoReps	2986
pmlcmpInEchos	2986
pmlcmpInErrors	2987
pmlcmpInMsgs	2987
pmlcmpInParamProbs	2987

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmlcmpInRedirects	2988
pmlcmpInSrcQuenchs	2988
pmlcmpInTimeExcds	2988
pmlcmpOutDestUnreachs	2989
pmlcmpOutEchoReps	2989
pmlcmpOutEchos	2989
pmlcmpOutErrors	2990
pmlcmpOutMsgs	2990
pmlcmpOutParmProbs	2990
pmlpFragCreates	2991
pmlpFragFails	2991
pmlpFragOKs	2991
pmlpInAddrErrors	2992
pmlpInDelivers	2992
pmlpInDiscards	2992
pmlpInHdrErrors	2993
pmlpInReceives	2993
pmlpInUnknownProtos	2993
pmlpOutDiscards	2994
pmlpOutRequests	2994
pmlpReasmFails	2994
pmlpReasmOKs	2995
pmlpReasmReqds	2995
pmUdpInDatagrams	2995
pmUdpInErrors	2996
pmUdpNoPorts	2996
pmUdpOutDatagrams	2996
IpAccessHostSpb_RNC Primitive Calculations	2997
GRAPHmultiLineSeparator	2997
NUMDAYS	2997
NUMHOURS	2997
IpAccessHostSpb_RNC Peg Counts	2997
PERLENSEC	2997
PERLENSEC_K	2998
pmlcmpInDestUnreachs	2998
pmlcmpInEchoReps	2998
pmlcmpInEchos	2999
pmlcmpInErrors	2999
pmlcmpInMsgs	2999
pmlcmpInParamProbs	3000
pmlcmpInRedirects	3000
pmlcmpInSrcQuenchs	3000
pmlcmpInTimeExcds	3001
pmlcmpOutDestUnreachs	3001
pmlcmpOutEchoReps	3001
pmlcmpOutEchos	3002
pmlcmpOutErrors	3002
pmlcmpOutMsgs	3002
pmlcmpOutParmProbs	3003
pmlpFragCreates	3003
pmlpFragFails	3003

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmIpFragOKs	3004
pmIpInAddrErrors	3004
pmIpInDelivers	3005
pmIpInDiscards	3005
pmIpInHdrErrors	3005
pmIpInReceives	3006
pmIpInUnknownProtos	3006
pmIpOutDiscards	3006
pmIpOutRequests	3007
pmIpReasmFails	3007
pmIpReasmOKs	3007
pmIpReasmReqds	3008
pmUdpInDatagrams	3008
pmUdpInErrors	3008
pmUdpNoPorts	3009
pmUdpOutDatagrams	3009
IpAtmLink_NodeB Primitive Calculations	3009
GRAPHmultiLineSeparator	3010
NUMDAYS	3010
NUMHOURS	3010
Received_Packets_Data_Link_NodeB	3010
Sent_Packets_IP_Data_Link_NodeB	3010
IpAtmLink_NodeB Peg Counts	3010
NodeB_RELEASE	3010
PERLENSEC	3011
PERLENSEC_K	3011
pmNoOfIfInDiscards	3011
pmNoOfIfInErrors	3012
pmNoOfIfInNUcastPkts	3012
pmNoOfIfInUcastPkts	3012
pmNoOfIfOutDiscards	3013
pmNoOfIfOutNUcastPkts	3013
pmNoOfIfOutUcastPkts	3013
IpAtmLink_RNC Primitive Calculations	3013
GRAPHmultiLineSeparator	3014
NUMDAYS	3014
NUMHOURS	3014
Received_Packets_Data_Link_RNC	3014
IpAtmLink_RNC Peg Counts	3014
PERLENSEC	3014
PERLENSEC_K	3015
pmNoOfIfInDiscards	3015
pmNoOfIfInErrors	3015
pmNoOfIfInNUcastPkts	3016
pmNoOfIfInUcastPkts	3016
pmNoOfIfOutDiscards	3016
pmNoOfIfOutNUcastPkts	3016
pmNoOfIfOutUcastPkts	3017
RNC_RELEASE	3017
IpService Primitive Calculations	3017

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GRAPHmultiLineSeparator	3017
NUMDAYS	3018
NUMHOURS	3018
p_Seizures_Sucess_Rate	3018
IpbService Peg Counts	3018
PERLENSEC	3018
pmForcedRelease	3018
pmNormalRelease	3019
pmTotalSeizures	3019
pmUnsuccSeizures	3019
RNC_RELEASE	3020
IpEthPacketDataRouter Primitive Calculations	3020
GRAPHmultiLineSeparator	3020
NUMDAYS	3020
NUMHOURS	3020
IpEthPacketDataRouter Peg Counts	3020
PERLENSEC	3020
PERLENSEC_K	3021
pmNoFaultyIpPackets	3021
pmNoRoutedIpBytesDI	3021
pmNoRoutedIpBytesUI	3022
pmNoRoutedIpPacketsDI	3022
pmNoRoutedIpPacketsUI	3022
pmSamplesPacketDataRab	3023
pmSumPacketDataRab	3023
IpInterface_NodeB Primitive Calculations	3023
GRAPHmultiLineSeparator	3023
NUMDAYS	3023
NUMHOURS	3024
IpInterface_NodeB Peg Counts	3024
PERLENSEC	3024
PERLENSEC_K	3024
pmDot1qTpVlanPortInFrames	3024
pmDot1qTpVlanPortOutFrames	3025
pmFramesExcTrafDsc	3025
pmIfStatsIpAddrErrors	3025
pmIfStatsIpInDiscards	3026
pmIfStatsIpInHdrErrors	3026
pmIfStatsIpInReceives	3026
pmIfStatsIpOutDiscards	3027
pmIfStatsIpOutRequests	3027
pmIfStatsIpUnknownProtos	3027
pmNoOfFailedPingsDefaultRouter0	3028
pmNoOfFailedPingsDefaultRouter1	3028
pmNoOfFailedPingsDefaultRouter2	3028
pmOctetsExcTrafDsc	3029
IpInterface_RNC Primitive Calculations	3029
GRAPHmultiLineSeparator	3029
NUMDAYS	3029
NUMHOURS	3029

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

IpInterface_RNC Peg Counts	3030
PERLENSEC	3030
PERLENSEC_K	3030
pmDot1qTpVlanPortInFrames	3030
pmDot1qTpVlanPortOutFrames	3031
pmFramesExcTrafDsc	3031
pmIfStatsIpAddrErrors	3031
pmIfStatsIpInDiscards	3032
pmIfStatsIpInHdrErrors	3032
pmIfStatsIpInReceives	3032
pmIfStatsIpOutDiscards	3033
pmIfStatsIpOutRequests	3033
pmIfStatsIpUnknownProtos	3033
pmNoOfFailedPingsDefaultRouter0	3034
pmNoOfFailedPingsDefaultRouter1	3034
pmNoOfFailedPingsDefaultRouter2	3034
pmOctetsExcTrafDsc	3035
IpSystem_NodeB Primitive Calculations	3035
GRAPHmultiLineSeparator	3035
NUMDAYS	3035
NUMHOURS	3035
IpSystem_RNC Primitive Calculations	3035
GRAPHmultiLineSeparator	3036
NUMDAYS	3036
NUMHOURS	3036
IubDataStreams Primitive Calculations	3036
GRAPHmultiLineSeparator	3036
NUMDAYS	3036
NUMHOURS	3036
IubDataStreams Peg Counts	3037
PERLENSEC	3037
PERLENSEC_K	3037
pmCAIclubHsLmtRatSpi00	3037
pmCAIclubHsLmtRatSpi01	3038
pmCAIclubHsLmtRatSpi02	3038
pmCAIclubHsLmtRatSpi03	3038
pmCAIclubHsLmtRatSpi04	3039
pmCAIclubHsLmtRatSpi05	3039
pmCAIclubHsLmtRatSpi06	3040
pmCAIclubHsLmtRatSpi07	3040
pmCAIclubHsLmtRatSpi08	3040
pmCAIclubHsLmtRatSpi09	3041
pmCAIclubHsLmtRatSpi10	3041
pmCAIclubHsLmtRatSpi11	3041
pmCAIclubHsLmtRatSpi12	3042
pmCAIclubHsLmtRatSpi13	3042
pmCAIclubHsLmtRatSpi14	3043
pmCAIclubHsLmtRatSpi15	3043
pmCapAllocclubHsLimitingRatio	3043
pmDchFramesCrcMismatch	3044

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDchFramesLate	3044
pmDchFramesOutOfSequenceDI	3044
pmDchFramesReceived	3045
pmDchFramesTooLate	3045
pmEdchIubLimitingRatio	3045
pmHsDataFramesLost	3046
pmHsDataFramesReceived	3046
pmHsDataFrmsRxSpi00	3047
pmHsDataFrmsRxSpi01	3047
pmHsDataFrmsRxSpi02	3047
pmHsDataFrmsRxSpi03	3048
pmHsDataFrmsRxSpi04	3048
pmHsDataFrmsRxSpi05	3048
pmHsDataFrmsRxSpi06	3049
pmHsDataFrmsRxSpi07	3049
pmHsDataFrmsRxSpi08	3049
pmHsDataFrmsRxSpi09	3050
pmHsDataFrmsRxSpi10	3050
pmHsDataFrmsRxSpi11	3051
pmHsDataFrmsRxSpi12	3051
pmHsDataFrmsRxSpi13	3051
pmHsDataFrmsRxSpi14	3052
pmHsDataFrmsRxSpi15	3052
pmHsDtFrDelayIubSpi00_01	3052
pmHsDtFrDelayIubSpi00_02	3053
pmHsDtFrDelayIubSpi00_03	3053
pmHsDtFrDelayIubSpi00_04	3053
pmHsDtFrDelayIubSpi00_05	3054
pmHsDtFrDelayIubSpi00_06	3054
pmHsDtFrDelayIubSpi00_07	3055
pmHsDtFrDelayIubSpi00_08	3055
pmHsDtFrDelayIubSpi00_09	3055
pmHsDtFrDelayIubSpi00_10	3056
pmHsDtFrDelayIubSpi00_11	3056
pmHsDtFrDelayIubSpi00_12	3057
pmHsDtFrDelayIubSpi00_13	3057
pmHsDtFrDelayIubSpi00_14	3057
pmHsDtFrDelayIubSpi00_15	3058
pmHsDtFrDelayIubSpi00_16	3058
pmHsDtFrDelayIubSpi01_01	3058
pmHsDtFrDelayIubSpi01_02	3059
pmHsDtFrDelayIubSpi01_03	3059
pmHsDtFrDelayIubSpi01_04	3060
pmHsDtFrDelayIubSpi01_05	3060
pmHsDtFrDelayIubSpi01_06	3060
pmHsDtFrDelayIubSpi01_07	3061
pmHsDtFrDelayIubSpi01_08	3061
pmHsDtFrDelayIubSpi01_09	3062
pmHsDtFrDelayIubSpi01_10	3062
pmHsDtFrDelayIubSpi01_11	3062
pmHsDtFrDelayIubSpi01_12	3063

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHsDtFrDelaylubSpi01_13	3063
pmHsDtFrDelaylubSpi01_14	3063
pmHsDtFrDelaylubSpi01_15	3064
pmHsDtFrDelaylubSpi01_16	3064
pmHsDtFrDelaylubSpi02_01	3065
pmHsDtFrDelaylubSpi02_02	3065
pmHsDtFrDelaylubSpi02_03	3065
pmHsDtFrDelaylubSpi02_04	3066
pmHsDtFrDelaylubSpi02_05	3066
pmHsDtFrDelaylubSpi02_06	3067
pmHsDtFrDelaylubSpi02_07	3067
pmHsDtFrDelaylubSpi02_08	3067
pmHsDtFrDelaylubSpi02_09	3068
pmHsDtFrDelaylubSpi02_10	3068
pmHsDtFrDelaylubSpi02_11	3068
pmHsDtFrDelaylubSpi02_12	3069
pmHsDtFrDelaylubSpi02_13	3069
pmHsDtFrDelaylubSpi02_14	3070
pmHsDtFrDelaylubSpi02_15	3070
pmHsDtFrDelaylubSpi02_16	3070
pmHsDtFrDelaylubSpi03_01	3071
pmHsDtFrDelaylubSpi03_02	3071
pmHsDtFrDelaylubSpi03_03	3072
pmHsDtFrDelaylubSpi03_04	3072
pmHsDtFrDelaylubSpi03_05	3072
pmHsDtFrDelaylubSpi03_06	3073
pmHsDtFrDelaylubSpi03_07	3073
pmHsDtFrDelaylubSpi03_08	3073
pmHsDtFrDelaylubSpi03_09	3074
pmHsDtFrDelaylubSpi03_10	3074
pmHsDtFrDelaylubSpi03_11	3075
pmHsDtFrDelaylubSpi03_12	3075
pmHsDtFrDelaylubSpi03_13	3075
pmHsDtFrDelaylubSpi03_14	3076
pmHsDtFrDelaylubSpi03_15	3076
pmHsDtFrDelaylubSpi03_16	3077
pmHsDtFrDelaylubSpi04_01	3077
pmHsDtFrDelaylubSpi04_02	3077
pmHsDtFrDelaylubSpi04_03	3078
pmHsDtFrDelaylubSpi04_04	3078
pmHsDtFrDelaylubSpi04_05	3078
pmHsDtFrDelaylubSpi04_06	3079
pmHsDtFrDelaylubSpi04_07	3079
pmHsDtFrDelaylubSpi04_08	3080
pmHsDtFrDelaylubSpi04_09	3080
pmHsDtFrDelaylubSpi04_10	3080
pmHsDtFrDelaylubSpi04_11	3081
pmHsDtFrDelaylubSpi04_12	3081
pmHsDtFrDelaylubSpi04_13	3082
pmHsDtFrDelaylubSpi04_14	3082
pmHsDtFrDelaylubSpi04_15	3082

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHsDtFrDelaylubSpi04_16	3083
pmHsDtFrDelaylubSpi05_01	3083
pmHsDtFrDelaylubSpi05_02	3083
pmHsDtFrDelaylubSpi05_03	3084
pmHsDtFrDelaylubSpi05_04	3084
pmHsDtFrDelaylubSpi05_05	3085
pmHsDtFrDelaylubSpi05_06	3085
pmHsDtFrDelaylubSpi05_07	3085
pmHsDtFrDelaylubSpi05_08	3086
pmHsDtFrDelaylubSpi05_09	3086
pmHsDtFrDelaylubSpi05_10	3087
pmHsDtFrDelaylubSpi05_11	3087
pmHsDtFrDelaylubSpi05_12	3087
pmHsDtFrDelaylubSpi05_13	3088
pmHsDtFrDelaylubSpi05_14	3088
pmHsDtFrDelaylubSpi05_15	3088
pmHsDtFrDelaylubSpi05_16	3089
pmHsDtFrDelaylubSpi06_01	3089
pmHsDtFrDelaylubSpi06_02	3090
pmHsDtFrDelaylubSpi06_03	3090
pmHsDtFrDelaylubSpi06_04	3090
pmHsDtFrDelaylubSpi06_05	3091
pmHsDtFrDelaylubSpi06_06	3091
pmHsDtFrDelaylubSpi06_07	3092
pmHsDtFrDelaylubSpi06_08	3092
pmHsDtFrDelaylubSpi06_09	3092
pmHsDtFrDelaylubSpi06_10	3093
pmHsDtFrDelaylubSpi06_11	3093
pmHsDtFrDelaylubSpi06_12	3093
pmHsDtFrDelaylubSpi06_13	3094
pmHsDtFrDelaylubSpi06_14	3094
pmHsDtFrDelaylubSpi06_15	3095
pmHsDtFrDelaylubSpi06_16	3095
pmHsDtFrDelaylubSpi07_01	3095
pmHsDtFrDelaylubSpi07_02	3096
pmHsDtFrDelaylubSpi07_03	3096
pmHsDtFrDelaylubSpi07_04	3097
pmHsDtFrDelaylubSpi07_05	3097
pmHsDtFrDelaylubSpi07_06	3097
pmHsDtFrDelaylubSpi07_07	3098
pmHsDtFrDelaylubSpi07_08	3098
pmHsDtFrDelaylubSpi07_09	3098
pmHsDtFrDelaylubSpi07_10	3099
pmHsDtFrDelaylubSpi07_11	3099
pmHsDtFrDelaylubSpi07_12	3100
pmHsDtFrDelaylubSpi07_13	3100
pmHsDtFrDelaylubSpi07_14	3100
pmHsDtFrDelaylubSpi07_15	3101
pmHsDtFrDelaylubSpi07_16	3101
pmHsDtFrDelaylubSpi08_01	3102
pmHsDtFrDelaylubSpi08_02	3102

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHsDtFrDelaylubSpi08_03	3102
pmHsDtFrDelaylubSpi08_04	3103
pmHsDtFrDelaylubSpi08_05	3103
pmHsDtFrDelaylubSpi08_06	3103
pmHsDtFrDelaylubSpi08_07	3104
pmHsDtFrDelaylubSpi08_08	3104
pmHsDtFrDelaylubSpi08_09	3105
pmHsDtFrDelaylubSpi08_10	3105
pmHsDtFrDelaylubSpi08_11	3105
pmHsDtFrDelaylubSpi08_12	3106
pmHsDtFrDelaylubSpi08_13	3106
pmHsDtFrDelaylubSpi08_14	3107
pmHsDtFrDelaylubSpi08_15	3107
pmHsDtFrDelaylubSpi08_16	3107
pmHsDtFrDelaylubSpi09_01	3108
pmHsDtFrDelaylubSpi09_02	3108
pmHsDtFrDelaylubSpi09_03	3108
pmHsDtFrDelaylubSpi09_04	3109
pmHsDtFrDelaylubSpi09_05	3109
pmHsDtFrDelaylubSpi09_06	3110
pmHsDtFrDelaylubSpi09_07	3110
pmHsDtFrDelaylubSpi09_08	3110
pmHsDtFrDelaylubSpi09_09	3111
pmHsDtFrDelaylubSpi09_10	3111
pmHsDtFrDelaylubSpi09_11	3112
pmHsDtFrDelaylubSpi09_12	3112
pmHsDtFrDelaylubSpi09_13	3112
pmHsDtFrDelaylubSpi09_14	3113
pmHsDtFrDelaylubSpi09_15	3113
pmHsDtFrDelaylubSpi09_16	3113
pmHsDtFrDelaylubSpi10_01	3114
pmHsDtFrDelaylubSpi10_02	3114
pmHsDtFrDelaylubSpi10_03	3115
pmHsDtFrDelaylubSpi10_04	3115
pmHsDtFrDelaylubSpi10_05	3115
pmHsDtFrDelaylubSpi10_06	3116
pmHsDtFrDelaylubSpi10_07	3116
pmHsDtFrDelaylubSpi10_08	3117
pmHsDtFrDelaylubSpi10_09	3117
pmHsDtFrDelaylubSpi10_10	3117
pmHsDtFrDelaylubSpi10_11	3118
pmHsDtFrDelaylubSpi10_12	3118
pmHsDtFrDelaylubSpi10_13	3118
pmHsDtFrDelaylubSpi10_14	3119
pmHsDtFrDelaylubSpi10_15	3119
pmHsDtFrDelaylubSpi10_16	3120
pmHsDtFrDelaylubSpi11_01	3120
pmHsDtFrDelaylubSpi11_02	3120
pmHsDtFrDelaylubSpi11_03	3121
pmHsDtFrDelaylubSpi11_04	3121
pmHsDtFrDelaylubSpi11_05	3122

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHsDtFrDelaylubSpi11_06	3122
pmHsDtFrDelaylubSpi11_07	3122
pmHsDtFrDelaylubSpi11_08	3123
pmHsDtFrDelaylubSpi11_09	3123
pmHsDtFrDelaylubSpi11_10	3123
pmHsDtFrDelaylubSpi11_11	3124
pmHsDtFrDelaylubSpi11_12	3124
pmHsDtFrDelaylubSpi11_13	3125
pmHsDtFrDelaylubSpi11_14	3125
pmHsDtFrDelaylubSpi11_15	3125
pmHsDtFrDelaylubSpi11_16	3126
pmHsDtFrDelaylubSpi12_01	3126
pmHsDtFrDelaylubSpi12_02	3127
pmHsDtFrDelaylubSpi12_03	3127
pmHsDtFrDelaylubSpi12_04	3127
pmHsDtFrDelaylubSpi12_05	3128
pmHsDtFrDelaylubSpi12_06	3128
pmHsDtFrDelaylubSpi12_07	3128
pmHsDtFrDelaylubSpi12_08	3129
pmHsDtFrDelaylubSpi12_09	3129
pmHsDtFrDelaylubSpi12_10	3130
pmHsDtFrDelaylubSpi12_11	3130
pmHsDtFrDelaylubSpi12_12	3130
pmHsDtFrDelaylubSpi12_13	3131
pmHsDtFrDelaylubSpi12_14	3131
pmHsDtFrDelaylubSpi12_15	3132
pmHsDtFrDelaylubSpi12_16	3132
pmHsDtFrDelaylubSpi13_01	3132
pmHsDtFrDelaylubSpi13_02	3133
pmHsDtFrDelaylubSpi13_03	3133
pmHsDtFrDelaylubSpi13_04	3133
pmHsDtFrDelaylubSpi13_05	3134
pmHsDtFrDelaylubSpi13_06	3134
pmHsDtFrDelaylubSpi13_07	3135
pmHsDtFrDelaylubSpi13_08	3135
pmHsDtFrDelaylubSpi13_09	3135
pmHsDtFrDelaylubSpi13_10	3136
pmHsDtFrDelaylubSpi13_11	3136
pmHsDtFrDelaylubSpi13_12	3137
pmHsDtFrDelaylubSpi13_13	3137
pmHsDtFrDelaylubSpi13_14	3137
pmHsDtFrDelaylubSpi13_15	3138
pmHsDtFrDelaylubSpi13_16	3138
pmHsDtFrDelaylubSpi14_01	3138
pmHsDtFrDelaylubSpi14_02	3139
pmHsDtFrDelaylubSpi14_03	3139
pmHsDtFrDelaylubSpi14_04	3140
pmHsDtFrDelaylubSpi14_05	3140
pmHsDtFrDelaylubSpi14_06	3140
pmHsDtFrDelaylubSpi14_07	3141
pmHsDtFrDelaylubSpi14_08	3141

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHsDtFrDelaylubSpi14_09	3142
pmHsDtFrDelaylubSpi14_10	3142
pmHsDtFrDelaylubSpi14_11	3142
pmHsDtFrDelaylubSpi14_12	3143
pmHsDtFrDelaylubSpi14_13	3143
pmHsDtFrDelaylubSpi14_14	3143
pmHsDtFrDelaylubSpi14_15	3144
pmHsDtFrDelaylubSpi14_16	3144
pmHsDtFrDelaylubSpi15_01	3145
pmHsDtFrDelaylubSpi15_02	3145
pmHsDtFrDelaylubSpi15_03	3145
pmHsDtFrDelaylubSpi15_04	3146
pmHsDtFrDelaylubSpi15_05	3146
pmHsDtFrDelaylubSpi15_06	3147
pmHsDtFrDelaylubSpi15_07	3147
pmHsDtFrDelaylubSpi15_08	3147
pmHsDtFrDelaylubSpi15_09	3148
pmHsDtFrDelaylubSpi15_10	3148
pmHsDtFrDelaylubSpi15_11	3148
pmHsDtFrDelaylubSpi15_12	3149
pmHsDtFrDelaylubSpi15_13	3149
pmHsDtFrDelaylubSpi15_14	3150
pmHsDtFrDelaylubSpi15_15	3150
pmHsDtFrDelaylubSpi15_16	3150
pmHsDtFrLostSpi00	3151
pmHsDtFrLostSpi01	3151
pmHsDtFrLostSpi02	3152
pmHsDtFrLostSpi03	3152
pmHsDtFrLostSpi04	3152
pmHsDtFrLostSpi05	3153
pmHsDtFrLostSpi06	3153
pmHsDtFrLostSpi07	3153
pmHsDtFrLostSpi08	3154
pmHsDtFrLostSpi09	3154
pmHsDtFrLostSpi10	3154
pmHsDtFrLostSpi11	3155
pmHsDtFrLostSpi12	3155
pmHsDtFrLostSpi13	3156
pmHsDtFrLostSpi14	3156
pmHsDtFrLostSpi15	3156
pmlubMacdPduRbsReceivedBits_000	3157
pmlubMacdPduRbsReceivedBits_001	3157
pmlubMacdPduRbsReceivedBits_002	3157
pmlubMacdPduRbsReceivedBits_003	3158
pmlubMacdPduRbsReceivedBits_004	3158
pmlubMacdPduRbsReceivedBits_005	3158
pmlubMacdPduRbsReceivedBits_006	3159
pmlubMacdPduRbsReceivedBits_007	3159
pmlubMacdPduRbsReceivedBits_008	3159
pmlubMacdPduRbsReceivedBits_009	3160
pmlubMacdPduRbsReceivedBits_010	3160

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmlubMacdPduRbsReceivedBits_011	3160
pmlubMacdPduRbsReceivedBits_012	3161
pmlubMacdPduRbsReceivedBits_013	3161
pmlubMacdPduRbsReceivedBits_014	3161
pmlubMacdPduRbsReceivedBits_015	3162
pmlubMacdPduRbsReceivedBits_016	3162
pmlubMacdPduRbsReceivedBits_017	3162
pmlubMacdPduRbsReceivedBits_018	3163
pmlubMacdPduRbsReceivedBits_019	3163
pmlubMacdPduRbsReceivedBits_020	3163
pmlubMacdPduRbsReceivedBits_021	3164
pmlubMacdPduRbsReceivedBits_022	3164
pmlubMacdPduRbsReceivedBits_023	3164
pmlubMacdPduRbsReceivedBits_024	3165
pmlubMacdPduRbsReceivedBits_025	3165
pmlubMacdPduRbsReceivedBits_026	3165
pmlubMacdPduRbsReceivedBits_027	3166
pmlubMacdPduRbsReceivedBits_028	3166
pmlubMacdPduRbsReceivedBits_029	3166
pmlubMacdPduRbsReceivedBits_030	3167
pmlubMacdPduRbsReceivedBits_031	3167
pmlubMacdPduRbsReceivedBits_032	3167
pmlubMacdPduRbsReceivedBits_033	3168
pmlubMacdPduRbsReceivedBits_034	3168
pmlubMacdPduRbsReceivedBits_035	3168
pmlubMacdPduRbsReceivedBits_036	3169
pmlubMacdPduRbsReceivedBits_037	3169
pmlubMacdPduRbsReceivedBits_038	3169
pmlubMacdPduRbsReceivedBits_039	3170
pmlubMacdPduRbsReceivedBits_040	3170
pmlubMacdPduRbsReceivedBits_041	3170
pmlubMacdPduRbsReceivedBits_042	3171
pmlubMacdPduRbsReceivedBits_043	3171
pmlubMacdPduRbsReceivedBits_044	3171
pmlubMacdPduRbsReceivedBits_045	3172
pmlubMacdPduRbsReceivedBits_046	3172
pmlubMacdPduRbsReceivedBits_047	3172
pmlubMacdPduRbsReceivedBits_048	3173
pmlubMacdPduRbsReceivedBits_049	3173
pmlubMacdPduRbsReceivedBits_050	3173
pmlubMacdPduRbsReceivedBits_051	3174
pmlubMacdPduRbsReceivedBits_052	3174
pmlubMacdPduRbsReceivedBits_053	3174
pmlubMacdPduRbsReceivedBits_054	3175
pmlubMacdPduRbsReceivedBits_055	3175
pmlubMacdPduRbsReceivedBits_056	3175
pmlubMacdPduRbsReceivedBits_057	3176
pmlubMacdPduRbsReceivedBits_058	3176
pmlubMacdPduRbsReceivedBits_059	3176
pmlubMacdPduRbsReceivedBits_060	3177
pmlubMacdPduRbsReceivedBits_061	3177

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmlubMacdPduRbsReceivedBits_062	3177
pmlubMacdPduRbsReceivedBits_063	3178
pmlubMacdPduRbsReceivedBits_064	3178
pmlubMacdPduRbsReceivedBits_065	3178
pmlubMacdPduRbsReceivedBits_066	3179
pmlubMacdPduRbsReceivedBits_067	3179
pmlubMacdPduRbsReceivedBits_068	3179
pmlubMacdPduRbsReceivedBits_069	3180
pmlubMacdPduRbsReceivedBits_070	3180
pmlubMacdPduRbsReceivedBits_071	3180
pmlubMacdPduRbsReceivedBits_072	3181
pmlubMacdPduRbsReceivedBits_073	3181
pmlubMacdPduRbsReceivedBits_074	3181
pmlubMacdPduRbsReceivedBits_075	3182
pmlubMacdPduRbsReceivedBits_076	3182
pmlubMacdPduRbsReceivedBits_077	3182
pmlubMacdPduRbsReceivedBits_078	3183
pmlubMacdPduRbsReceivedBits_079	3183
pmlubMacdPduRbsReceivedBits_080	3183
pmlubMacdPduRbsReceivedBits_081	3184
pmlubMacdPduRbsReceivedBits_082	3184
pmlubMacdPduRbsReceivedBits_083	3184
pmlubMacdPduRbsReceivedBits_084	3185
pmlubMacdPduRbsReceivedBits_085	3185
pmlubMacdPduRbsReceivedBits_086	3185
pmlubMacdPduRbsReceivedBits_087	3186
pmlubMacdPduRbsReceivedBits_088	3186
pmlubMacdPduRbsReceivedBits_089	3186
pmlubMacdPduRbsReceivedBits_090	3187
pmlubMacdPduRbsReceivedBits_091	3187
pmlubMacdPduRbsReceivedBits_092	3187
pmlubMacdPduRbsReceivedBits_093	3188
pmlubMacdPduRbsReceivedBits_094	3188
pmlubMacdPduRbsReceivedBits_095	3188
pmlubMacdPduRbsReceivedBits_096	3189
pmlubMacdPduRbsReceivedBits_097	3189
pmlubMacdPduRbsReceivedBits_098	3189
pmlubMacdPduRbsReceivedBits_099	3190
pmlubMacdPduRbsReceivedBits_100	3190
pmNoUllubLimitEul	3190
pmRbsHsPdschCodePrio	3191
pmTargetHsRate_000	3191
pmTargetHsRate_001	3191
pmTargetHsRate_002	3192
pmTargetHsRate_003	3192
pmTargetHsRate_004	3192
pmTargetHsRate_005	3193
pmTargetHsRate_006	3193
pmTargetHsRate_007	3193
pmTargetHsRate_008	3194
pmTargetHsRate_009	3194

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTargetHsRate_010	3194
pmTargetHsRate_011	3195
pmTargetHsRate_012	3195
pmTargetHsRate_013	3195
pmTargetHsRate_014	3196
pmTargetHsRate_015	3196
pmTargetHsRate_016	3196
pmTargetHsRate_017	3197
pmTargetHsRate_018	3197
pmTargetHsRate_019	3197
pmTargetHsRate_020	3198
pmTargetHsRate_021	3198
pmTargetHsRate_022	3198
pmTargetHsRate_023	3199
pmTargetHsRate_024	3199
pmTargetHsRate_025	3199
pmTargetHsRate_026	3200
pmTargetHsRate_027	3200
pmTargetHsRate_028	3200
pmTargetHsRate_029	3201
pmTargetHsRate_030	3201
pmTargetHsRate_031	3201
pmTargetHsRate_032	3202
pmTargetHsRate_033	3202
pmTargetHsRate_034	3202
pmTargetHsRate_035	3203
pmTargetHsRate_036	3203
pmTargetHsRate_037	3203
pmTargetHsRate_038	3204
pmTargetHsRate_039	3204
pmTargetHsRate_040	3204
pmTargetHsRate_041	3205
pmTargetHsRate_042	3205
pmTargetHsRate_043	3205
pmTargetHsRate_044	3206
pmTargetHsRate_045	3206
pmTargetHsRate_046	3206
pmTargetHsRate_047	3207
pmTargetHsRate_048	3207
pmTargetHsRate_049	3207
pmTargetHsRate_050	3208
pmTargetHsRate_051	3208
pmTargetHsRate_052	3208
pmTargetHsRate_053	3209
pmTargetHsRate_054	3209
pmTargetHsRate_055	3209
pmTargetHsRate_056	3210
pmTargetHsRate_057	3210
pmTargetHsRate_058	3210
pmTargetHsRate_059	3211
pmTargetHsRate_060	3211

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTargetHsRate_061	3211
pmTargetHsRate_062	3212
pmTargetHsRate_063	3212
pmTargetHsRate_064	3212
pmTargetHsRate_065	3213
pmTargetHsRate_066	3213
pmTargetHsRate_067	3213
pmTargetHsRate_068	3214
pmTargetHsRate_069	3214
pmTargetHsRate_070	3214
pmTargetHsRate_071	3215
pmTargetHsRate_072	3215
pmTargetHsRate_073	3215
pmTargetHsRate_074	3216
pmTargetHsRate_075	3216
pmTargetHsRate_076	3216
pmTargetHsRate_077	3217
pmTargetHsRate_078	3217
pmTargetHsRate_079	3217
pmTargetHsRate_080	3218
pmTargetHsRate_081	3218
pmTargetHsRate_082	3218
pmTargetHsRate_083	3219
pmTargetHsRate_084	3219
pmTargetHsRate_085	3219
pmTargetHsRate_086	3220
pmTargetHsRate_087	3220
pmTargetHsRate_088	3220
pmTargetHsRate_089	3221
pmTargetHsRate_090	3221
pmTargetHsRate_091	3221
pmTargetHsRate_092	3222
pmTargetHsRate_093	3222
pmTargetHsRate_094	3222
pmTargetHsRate_095	3223
pmTargetHsRate_096	3223
pmTargetHsRate_097	3223
pmTargetHsRate_098	3224
pmTargetHsRate_099	3224
pmTargetHsRate_100	3224
lubEdch Primitive Calculations	3225
GRAPHmultiLineSeparator	3225
NUMDAYS	3225
NUMHOURS	3225
lubEdch Peg Counts	3225
PERLENSEC	3225
PERLENSEC_K	3226
pmEdchDataFrameDelaylub_00	3226
pmEdchDataFrameDelaylub_01	3226
pmEdchDataFrameDelaylub_02	3227
pmEdchDataFrameDelaylub_03	3227

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmEdchDataFrameDelaylub_04	3227
pmEdchDataFrameDelaylub_05	3228
pmEdchDataFrameDelaylub_06	3228
pmEdchDataFrameDelaylub_07	3228
pmEdchDataFrameDelaylub_08	3229
pmEdchDataFrameDelaylub_09	3229
pmEdchDataFrameDelaylub_10	3229
pmEdchDataFrameDelaylub_11	3230
pmEdchDataFrameDelaylub_12	3230
pmEdchDataFrameDelaylub_13	3230
pmEdchDataFrameDelaylub_14	3231
pmEdchDataFrameDelaylub_15	3231
pmEdchDataFramesLost	3231
pmEdchDataFramesReceived	3232
lubLink Primitive Calculations	3232
GRAPHmultiLineSeparator	3232
NUMDAYS	3232
NUMHOURS	3232
lubLink Peg Counts	3232
availabilityStatus	3233
beMarginDIHw	3233
beMarginUIHw	3233
diHwAdm	3233
iubLinkNodeBFunction	3234
iubLinkUtranCell	3234
operationalState	3234
pmDchFramesOutOfSequenceUI	3235
pmDICredits_00	3235
pmDICredits_01	3235
pmDICredits_02	3236
pmDICredits_03	3236
pmDICredits_04	3236
pmDICredits_05	3236
pmDICredits_06	3237
pmDICredits_07	3237
pmDICredits_08	3237
pmDICredits_09	3238
pmHsSevereCong	3238
pmIubLinkDynamicDelayMax	3238
pmIubLinkStaticDelay	3239
pmNoMtchTimingAdjContrFrames	3239
pmNoOfDiscardedNbapcMessages	3240
pmSamplesDICredits	3240
pmSamplesUICredits	3240
pmSumDICredits	3241
pmSumSqrDICredits	3241
pmSumSqrUICredits	3241
pmSumUICredits	3242
pmTotalTimeIubLinkCongestedDI	3242
pmTotalTimeIubLinkUnavail	3242
pmUICredits_00	3243

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUICredits_01	3243
pmUICredits_02	3243
pmUICredits_03	3243
pmUICredits_04	3244
pmUICredits_05	3244
pmUICredits_06	3244
pmUICredits_07	3245
pmUICredits_08	3245
pmUICredits_09	3245
rbsId	3246
reservedBy	3246
rncModuleRef	3246
tpcPattern01CountDI	3246
ulHwAdm	3247
userLabel	3247
luLink Primitive Calculations	3247
GRAPHmultiLineSeparator	3247
NUMDAYS	3247
NUMHOURS	3248
luLink Peg Counts	3248
PERLENSEC	3248
PERLENSEC_K	3248
pmInFrames	3248
pmInLostFrames	3249
pmInOutOfSequenceFrames	3249
pmOutFrames	3250
lurLink Primitive Calculations	3250
GRAPHmultiLineSeparator	3250
LocalName	3250
NUMDAYS	3250
NUMHOURS	3250
lurLink Peg Counts	3251
aliasPlmnIdentities	3251
mcc	3251
mnc	3251
mncLength	3251
PERLENSEC	3252
PERLENSEC_K	3252
pmDchFramesOutOfSequenceUI	3252
pmEdchDataFrameDelaylub_00	3253
pmEdchDataFrameDelaylub_01	3253
pmEdchDataFrameDelaylub_02	3253
pmEdchDataFrameDelaylub_03	3254
pmEdchDataFrameDelaylub_04	3254
pmEdchDataFrameDelaylub_05	3254
pmEdchDataFrameDelaylub_06	3255
pmEdchDataFrameDelaylub_07	3255
pmEdchDataFrameDelaylub_08	3256
pmEdchDataFrameDelaylub_09	3256
pmEdchDataFrameDelaylub_10	3256

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmEdchDataFrameDelaylub_11	3257
pmEdchDataFrameDelaylub_12	3257
pmEdchDataFrameDelaylub_13	3257
pmEdchDataFrameDelaylub_14	3258
pmEdchDataFrameDelaylub_15	3258
pmEdchDataFramesLost	3258
pmEdchDataFramesReceived	3259
pmHsSevereCong	3259
pmIurCommonControlFrames	3259
pmIurCommonControlFramesFaulty	3260
pmIurCommonDIFrames	3260
pmIurCommonDIFramesFaulty	3260
pmIurCommonEstAttExistTranspBearer	3261
pmIurCommonEstAttNewTranspBearer	3261
pmIurCommonEstSuccExistTranspBearer	3261
pmIurCommonEstSuccNewTranspBearer	3262
pmIurCommonFachControlFrames	3262
pmIurCommonFachControlFrameTimeout	3262
pmIurCommonFachDataFrames	3263
pmIurCommonFachDataFramesFaulty	3263
pmIurCommonRelease	3263
pmIurCommonUIFrames	3264
pmIurCommonUIFramesFaulty	3264
pmIurTranspBearerRelease	3264
pmNoAttIncCnhhoCsNonSpeech	3265
pmNoAttIncCnhhoSpeech	3265
pmNoNormalRabReleaseCs64	3265
pmNoNormalRabReleaseCsStream	3265
pmNoNormalRabReleasePacket	3266
pmNoNormalRabReleasePacketStream	3266
pmNoNormalRabReleaseSpeech	3266
pmNoOfRIForDriftingUesPerDrnc	3266
pmNoSuccIncCnhhoCsNonSpeech	3267
pmNoSuccIncCnhhoSpeech	3267
pmNoSystemRabReleaseCs64	3267
pmNoSystemRabReleaseCsStream	3268
pmNoSystemRabReleasePacket	3268
pmNoSystemRabReleasePacketStream	3268
pmNoSystemRabReleaseSpeech	3268
RNC_RELEASE	3269
rncl	3269
synchRetransmissions	3269
synchTimeout	3269
userLabel	3270
LA_RNC Primitive Calculations	3270
GRAPHMultiLineSeparator	3270
NUMDAYS	3270
NUMHOURS	3270
LA_RNC Peg Counts	3270
att	3270
lac	3271

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC	3271
PERLENSEC_K	3271
pmCnInitPagingToldleUeLa	3272
reservedBy	3272
RNC_RELEASE	3272
t3212	3272
userLabel	3273
M3uAssociation_NodeB Primitive Calculations	3273
GRAPHmultiLineSeparator	3273
NUMDAYS	3273
NUMHOURS	3273
Payload_data_messages_received_per_second	3273
Payload_data_messages_sent_per_second	3274
M3uAssociation_NodeB Peg Counts	3274
PERLENSEC	3274
PERLENSEC_K	3274
pmNoOfAspacAckReceived	3274
pmNoOfAspacAckSent	3275
pmNoOfAspacReceived	3275
pmNoOfAspacSent	3275
pmNoOfAspdnAckReceived	3276
pmNoOfAspdnAckSent	3276
pmNoOfAspdnReceived	3276
pmNoOfAspdnSent	3277
pmNoOfAspiaAckReceived	3277
pmNoOfAspiaAckSent	3277
pmNoOfAspiaReceived	3278
pmNoOfAspiaSent	3278
pmNoOfAspupAckReceived	3278
pmNoOfAspupAckSent	3279
pmNoOfAspupReceived	3279
pmNoOfAspupSent	3279
pmNoOfCommunicationLost	3280
pmNoOfCongestion	3280
pmNoOfDataMsgRec	3280
pmNoOfDataMsgSent	3281
pmNoOfDaudMsgSent	3281
pmNoOfDaudReceived	3281
pmNoOfDavaRec	3282
pmNoOfDavaSent	3282
pmNoOfDunaRec	3282
pmNoOfDunaSent	3283
pmNoOfDupuRec	3283
pmNoOfDupuSent	3283
pmNoOfErrorMsgRec	3284
pmNoOfErrorMsgSent	3284
pmNoOfM3uaDataMsgDiscarded	3284
pmNoOfNotifyMsgRec	3284
pmNoOfSconRec	3285
pmNoOfSconSent	3285

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

M3uAssociation_RNC Primitive Calculations	3285
GRAPHmultiLineSeparator	3285
NUMDAYS	3286
NUMHOURS	3286
Payload_data_messages_received_per_second	3286
Payload_data_messages_sent_per_second	3286
M3uAssociation_RNC Peg Counts	3286
PERLENSEC	3286
PERLENSEC_K	3287
pmNoOfAspacAckReceived	3287
pmNoOfAspacAckSent	3287
pmNoOfAspacReceived	3288
pmNoOfAspacSent	3288
pmNoOfAspdnAckReceived	3288
pmNoOfAspdnAckSent	3289
pmNoOfAspdnReceived	3289
pmNoOfAspdnSent	3289
pmNoOfAspiaAckReceived	3290
pmNoOfAspiaAckSent	3290
pmNoOfAspiaReceived	3290
pmNoOfAspiaSent	3291
pmNoOfAspupAckReceived	3291
pmNoOfAspupAckSent	3291
pmNoOfAspupReceived	3292
pmNoOfAspupSent	3292
pmNoOfCommunicationLost	3292
pmNoOfCongestion	3292
pmNoOfDataMsgRec	3293
pmNoOfDataMsgSent	3293
pmNoOfDaudMsgSent	3293
pmNoOfDaudReceived	3294
pmNoOfDavaRec	3294
pmNoOfDavaSent	3294
pmNoOfDunaRec	3295
pmNoOfDunaSent	3295
pmNoOfDupuRec	3295
pmNoOfDupuSent	3296
pmNoOfErrorMsgRec	3296
pmNoOfErrorMsgSent	3296
pmNoOfM3uaDataMsgDiscarded	3297
pmNoOfNotifyMsgRec	3297
pmNoOfSconRec	3297
pmNoOfSconSent	3298
MccService Primitive Calculations	3298
GRAPHmultiLineSeparator	3298
NUMDAYS	3298
NUMHOURS	3298
p_Seizures_Sucess_Rate	3298
MccService Peg Counts	3299
PERLENSEC	3299

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmForcedRelease	3299
pmNormalRelease	3299
pmTotalSeizures	3300
pmUnsuccSeizures	3300
RNC_RELEASE	3300
MediumAccUnit_NodeB Primitive Calculations	3300
GRAPHmultiLineSeparator	3301
NUMDAYS	3301
NUMHOURS	3301
MediumAccUnit_NodeB Peg Counts	3301
NodeB_RELEASE	3301
PERLENSEC	3301
PERLENSEC_K	3301
pmNoOfDot3StatsFCSErrors	3302
pmNoOfDot3StatsLateCollisions	3302
MediumAccUnit_RNC Primitive Calculations	3302
GRAPHmultiLineSeparator	3302
NUMDAYS	3302
NUMHOURS	3302
MediumAccUnit_RNC Peg Counts	3303
PERLENSEC	3303
PERLENSEC_K	3303
pmNoOfDot3StatsFCSErrors	3303
pmNoOfDot3StatsLateCollisions	3303
RNC_RELEASE	3304
MfhService Primitive Calculations	3304
GRAPHmultiLineSeparator	3304
NUMDAYS	3304
NUMHOURS	3304
MfhService Peg Counts	3304
PERLENSEC	3304
RNC_RELEASE	3305
MpcService Primitive Calculations	3305
GRAPHmultiLineSeparator	3305
NUMDAYS	3305
NUMHOURS	3305
p_Seizures_Sucess_Rate	3306
MpcService Peg Counts	3306
PERLENSEC	3306
pmForcedRelease	3306
pmNormalRelease	3306
pmTotalSeizures	3307
pmUnsuccSeizures	3307
RNC_RELEASE	3307
Mtp2Tp_NodeB Primitive Calculations	3308
GRAPHmultiLineSeparator	3308
NUMDAYS	3308
NUMHOURS	3308
Received_MSUs_per_second	3308
Mtp2Tp_NodeB Peg Counts	3308

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC	3308
PERLENSEC_K	3309
pmLocalSIBTime	3309
pmNoOfMSUReceived	3309
pmNoOfNacks	3310
pmNoOfReTransmittedOctets	3310
pmNoOfSendBufferOctets	3310
pmNoOfSIOsIFReceived	3311
pmNoOfSIOsIFTransmitted	3311
pmNoOfStartedRBCongestion	3311
pmNoOfSuReceivedInError	3312
pmRemoteSIBTime	3312
Mtp2Tp_RNC Primitive Calculations	3312
GRAPHmultiLineSeparator	3312
NUMDAYS	3312
NUMHOURS	3313
Received_MSUs_per_second	3313
Mtp2Tp_RNC Peg Counts	3313
PERLENSEC	3313
PERLENSEC_K	3313
pmLocalSIBTime	3313
pmNoOfMSUReceived	3314
pmNoOfNacks	3314
pmNoOfReTransmittedOctets	3314
pmNoOfSendBufferOctets	3315
pmNoOfSIOsIFReceived	3315
pmNoOfSIOsIFTransmitted	3315
pmNoOfStartedRBCongestion	3316
pmNoOfSuReceivedInError	3316
pmRemoteSIBTime	3316
Mtp3bAp_NodeB Primitive Calculations	3317
GRAPHmultiLineSeparator	3317
NUMDAYS	3317
NUMHOURS	3317
Mtp3bAp_NodeB Peg Counts	3317
PERLENSEC	3317
PERLENSEC_K	3318
pmNoOfAdjacentSPNotAccessible	3318
pmNoOfUserPartUnavailRec	3318
Mtp3bAp_RNC Primitive Calculations	3319
GRAPHmultiLineSeparator	3319
NUMDAYS	3319
NUMHOURS	3319
Mtp3bAp_RNC Peg Counts	3319
PERLENSEC	3319
PERLENSEC_K	3319
pmNoOfAdjacentSPNotAccessible	3320
pmNoOfUserPartUnavailRec	3320
Mtp3bSI_NodeB Primitive Calculations	3320
GRAPHmultiLineSeparator	3320

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	3321
NUMHOURS	3321
Mtp3bSI_NodeB Peg Counts	3321
PERLENSEC	3321
PERLENSEC_K	3321
pmNoOfAALINServiceInd	3322
pmNoOfAALOUTInd	3322
pmNoOfCBDSent	3322
pmNoOfCOOXCOSent	3323
pmNoOfLocalLinkCongestCeaseRec	3323
pmNoOfLocalLinkCongestRec	3323
pmNoOfMSURec	3323
pmNoOfMSUSent	3324
Mtp3bSI_RNC Primitive Calculations	3324
GRAPHmultiLineSeparator	3324
NUMDAYS	3324
NUMHOURS	3324
Mtp3bSI_RNC Peg Counts	3325
PERLENSEC	3325
PERLENSEC_K	3325
pmNoOfAALINServiceInd	3325
pmNoOfAALOUTInd	3326
pmNoOfCBDSent	3326
pmNoOfCOOXCOSent	3326
pmNoOfLocalLinkCongestCeaseRec	3327
pmNoOfLocalLinkCongestRec	3327
pmNoOfMSURec	3327
pmNoOfMSUSent	3328
Mtp3bSIs_NodeB Primitive Calculations	3328
GRAPHmultiLineSeparator	3328
NUMDAYS	3328
NUMHOURS	3328
Mtp3bSIs_RNC Primitive Calculations	3328
GRAPHmultiLineSeparator	3328
NUMDAYS	3329
NUMHOURS	3329
Mtp3bSp_NodeB Primitive Calculations	3329
GRAPHmultiLineSeparator	3329
NUMDAYS	3329
NUMHOURS	3329
Mtp3bSp_NodeB Peg Counts	3329
PERLENSEC	3330
PERLENSEC_K	3330
pmNoOfCBAREc	3330
pmNoOfCBASent	3331
pmNoOfChangeBackDeclRec	3331
pmNoOfChangeOverRec	3331
pmNoOfCOAXCAREc	3331
pmNoOfCOAXCASent	3332
pmNoOfControlledRerouteSuccessPerf	3332

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfECARec	3332
pmNoOfECASent	3333
pmNoOfECOSent	3333
pmNoOfEmergencyChangeOverRec	3333
pmNoOfForcedRerouteSuccessPerf	3334
pmNoOfInAssEstReqInStDownWhStEstIsBlck	3334
pmNoOfMaxTrialsForAssocActivReached	3334
pmNoOfMaxTrialsForAssocEstabReached	3335
pmNoOfSctpAssociationRestart	3335
pmNoOfSctpBufOverflow	3335
pmNoOfSctpCommunicationErr	3336
pmNoOfSctpNetworkStatusChange	3336
pmNoOfSctpResumeSending	3336
pmNoOfSctpSendFailure	3337
pmNoOfSLTAFirstTimeOutRec	3337
pmNoOfSLTASecondTimeOutRec	3337
pmNoOfSuccessAssocAbort	3338
pmNoOfSuccessAssocEstablish	3338
pmNoOfTimerT21WasStarted	3338
pmNoOfTRARec	3338
pmNoOfTRASent	3339
pmNoOfUnsuccessAssocEstablish	3339
pmNoOfUnsuccessAssocShutDown	3339
pmNoOfUnsuccessForcedRerouting	3340
pmNoOfUPMsgDiscardedDueToRoutingErr	3340
Mtp3bSp_RNC Primitive Calculations	3340
GRAPHmultiLineSeparator	3340
NUMDAYS	3341
NUMHOURS	3341
Mtp3bSp_RNC Peg Counts	3341
PERLENSEC	3341
PERLENSEC_K	3341
pmNoOfCBARec	3342
pmNoOfCBASent	3342
pmNoOfChangeBackDeclRec	3342
pmNoOfChangeOverRec	3342
pmNoOfCOAXCARec	3343
pmNoOfCOAXCASent	3343
pmNoOfControlledRerouteSuccessPerf	3343
pmNoOfECARec	3344
pmNoOfECASent	3344
pmNoOfECOSent	3344
pmNoOfEmergencyChangeOverRec	3345
pmNoOfForcedRerouteSuccessPerf	3345
pmNoOfInAssEstReqInStDownWhStEstIsBlck	3345
pmNoOfMaxTrialsForAssocActivReached	3346
pmNoOfMaxTrialsForAssocEstabReached	3346
pmNoOfSctpAssociationRestart	3346
pmNoOfSctpBufOverflow	3347
pmNoOfSctpCommunicationErr	3347
pmNoOfSctpNetworkStatusChange	3347

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfSctpResumeSending	3348
pmNoOfSctpSendFailure	3348
pmNoOfSLTAFirstTimeOutRec	3348
pmNoOfSLTASecondTimeOutRec	3349
pmNoOfSuccessAssocAbort	3349
pmNoOfSuccessAssocEstablish	3349
pmNoOfTimerT21WasStarted	3350
pmNoOfTRARec	3350
pmNoOfTRASent	3350
pmNoOfUnsuccessAssocEstablish	3350
pmNoOfUnsuccessAssocShutDown	3351
pmNoOfUnsuccessForcedRerouting	3351
pmNoOfUPMsgDiscardedDueToRoutingErr	3351
Mtp3bSrs_NodeB Primitive Calculations	3352
GRAPHmultiLineSeparator	3352
NUMDAYS	3352
NUMHOURS	3352
Mtp3bSrs_NodeB Peg Counts	3352
pmNoOfDiscardedMsgFromBroadToNarrow	3352
pmNoOfSecsAccRouteSetUnavailable	3353
Mtp3bSrs_RNC Primitive Calculations	3353
GRAPHmultiLineSeparator	3353
NUMDAYS	3353
NUMHOURS	3353
Mtp3bSrs_RNC Peg Counts	3353
pmNoOfDiscardedMsgFromBroadToNarrow	3354
pmNoOfSecsAccRouteSetUnavailable	3354
NbapCommon Primitive Calculations	3354
GRAPHmultiLineSeparator	3354
LocalName	3354
NUMDAYS	3355
NUMHOURS	3355
NbapCommon Peg Counts	3355
activeUniSaalTpRef	3355
administrativeState	3355
availabilityStatus	3356
I2EstablishReqRetryT	3356
operationalState	3356
PERLENSEC	3356
PERLENSEC_K	3357
pmNoOfDiscardedMsg	3357
pmNoOfDiscardedNbapMessages	3357
RNC_RELEASE	3358
standbyUniSaalTpRef	3358
userLabel	3358
NniSaalTp_NodeB Primitive Calculations	3358
GRAPHmultiLineSeparator	3359
NUMDAYS	3359
NUMHOURS	3359
NniSaalTp_NodeB Peg Counts	3359

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NodeB_RELEASE	3359
PERLENSEC	3359
PERLENSEC_K	3360
pmLinkInServiceTime	3360
pmNoOfAlignmentFailures	3360
pmNoOfAllSLFailures	3361
pmNoOfLocalCongestions	3361
pmNoOfNoResponses	3361
pmNoOfOtherErrors	3362
pmNoOfProtocolErrors	3362
pmNoOfReceivedSDUs	3362
pmNoOfRemoteCongestions	3362
pmNoOfSentSDUs	3363
pmNoOfSequenceDataLosses	3363
pmNoOfUnsuccReTransmissions	3363
NniSaalTp_RNC Primitive Calculations	3364
GRAPHmultiLineSeparator	3364
NUMDAYS	3364
NUMHOURS	3364
NniSaalTp_RNC Peg Counts	3364
PERLENSEC	3364
PERLENSEC_K	3365
pmLinkInServiceTime	3365
pmNoOfAlignmentFailures	3365
pmNoOfAllSLFailures	3366
pmNoOfLocalCongestions	3366
pmNoOfNoResponses	3366
pmNoOfOtherErrors	3367
pmNoOfProtocolErrors	3367
pmNoOfReceivedSDUs	3367
pmNoOfRemoteCongestions	3367
pmNoOfSentSDUs	3368
pmNoOfSequenceDataLosses	3368
pmNoOfUnsuccReTransmissions	3368
RNC_RELEASE	3369
NodeB Primitive Calculations	3369
GRAPHmultiLineSeparator	3369
NUMDAYS	3369
NUMHOURS	3369
Vpc_ErrBlock%_Received	3369
NodeB Peg Counts	3370
accuracy	3370
controlFrameT	3370
nodeBFunctionlubLink	3370
noOfRetries	3371
noOfSamples	3371
phaseDiffThreshold	3371
phaseMeasurement	3371
pmNoOfDscMsg	3372
pmTotTmlubLnCongUI	3372

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

qEval	3372
reservedBy	3372
supervisionIntervalT	3373
timeStamp	3373
userLabel	3373
userLabel_CM	3374
NrService Primitive Calculations	3374
GRAPHmultiLineSeparator	3374
NUMDAYS	3374
NUMHOURS	3374
p_Seizures_Sucess_Rate	3374
NrService Peg Counts	3374
PERLENSEC	3375
pmForcedRelease	3375
pmNormalRelease	3375
pmTotalSeizures	3375
pmUnsuccSeizures	3376
RNC_RELEASE	3376
Os155PhyPathTrm_NodeB Primitive Calculations	3376
GRAPHmultiLineSeparator	3376
NUMDAYS	3377
NUMHOURS	3377
Phy_Errored_Ratio_Multiplexer_NodeB	3377
Os155PhyPathTrm_NodeB Peg Counts	3377
NodeB_RELEASE	3377
PERLENSEC	3377
PERLENSEC_K	3377
pmMsBbe	3378
pmMsEs	3378
pmMsSes	3378
pmMsUas	3379
pmVc4Es	3379
pmVc4Ses	3379
Os155PhyPathTrm_RNC Primitive Calculations	3379
GRAPHmultiLineSeparator	3379
NUMDAYS	3380
NUMHOURS	3380
Phy_Errored_Ratio_Multiplexer_RNC	3380
Os155PhyPathTrm_RNC Peg Counts	3380
PERLENSEC	3380
PERLENSEC_K	3380
pmMsBbe	3381
pmMsEs	3381
pmMsSes	3381
pmMsUas	3381
RNC_RELEASE	3382
Ospf_NodeB Primitive Calculations	3382
GRAPHmultiLineSeparator	3382
NUMDAYS	3382
NUMHOURS	3382

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Ospf_NodeB Peg Counts	3382
NodeB_RELEASE	3382
PERLENSEC	3382
PERLENSEC_K	3383
pmNoOfOspfOriginateNewLsas	3383
pmNoOfOspfRxNewLsas	3383
Ospf_RNC Primitive Calculations	3384
GRAPHmultiLineSeparator	3384
NUMDAYS	3384
NUMHOURS	3384
Ospf_RNC Peg Counts	3384
PERLENSEC	3384
PERLENSEC_K	3385
pmNoOfOspfOriginateNewLsas	3385
pmNoOfOspfRxNewLsas	3385
RNC_RELEASE	3386
OspfArea_NodeB Primitive Calculations	3386
GRAPHmultiLineSeparator	3386
NUMDAYS	3386
NUMHOURS	3386
OspfArea_NodeB Peg Counts	3386
NodeB_RELEASE	3387
PERLENSEC	3387
PERLENSEC_K	3387
pmNoOfOspfSpfRuns	3387
OspfArea_RNC Primitive Calculations	3388
GRAPHmultiLineSeparator	3388
NUMDAYS	3388
NUMHOURS	3388
OspfArea_RNC Peg Counts	3388
PERLENSEC	3388
PERLENSEC_K	3389
pmNoOfOspfSpfRuns	3389
RNC_RELEASE	3389
OspfInterface_NodeB Primitive Calculations	3390
GRAPHmultiLineSeparator	3390
NUMDAYS	3390
NUMHOURS	3390
OspfInterface_NodeB Peg Counts	3390
NodeB_RELEASE	3390
PERLENSEC	3390
PERLENSEC_K	3391
pmNoOfOspfIfEvents	3391
OspfInterface_RNC Primitive Calculations	3391
GRAPHmultiLineSeparator	3392
NUMDAYS	3392
NUMHOURS	3392
OspfInterface_RNC Peg Counts	3392
PERLENSEC	3392
PERLENSEC_K	3392

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfOspflfEvents	3393
RNC_RELEASE	3393
PacketDataRouter Primitive Calculations	3393
GRAPHmultiLineSeparator	3393
NUMDAYS	3393
NUMHOURS	3394
PacketDataRouter Peg Counts	3394
administrativeState	3394
availabilityStatus	3394
operationalState	3394
pdrDeviceRef	3395
PERLENSEC	3395
PERLENSEC_K	3395
pmNoFaultyIpPackets	3396
pmNoRoutedIpBytesDI	3396
pmNoRoutedIpBytesUI	3396
pmNoRoutedIpPacketsDI	3396
pmNoRoutedIpPacketsUI	3397
pmSamplesPacketDataRab	3397
pmSumPacketDataRab	3397
RNC_RELEASE	3398
timeToLive	3398
userLabel	3398
PacketDataRouter_RNC Primitive Calculations	3398
GRAPHmultiLineSeparator	3399
NUMDAYS	3399
NUMHOURS	3399
PacketDataRouter_RNC Peg Counts	3399
PERLENSEC	3399
PERLENSEC_K	3399
pmNoFaultyIpPackets	3400
pmNoRoutedIpBytesDI	3400
pmNoRoutedIpBytesUI	3400
pmNoRoutedIpPacketsDI	3401
pmNoRoutedIpPacketsUI	3401
pmSamplesPacketDataRab	3401
pmSumPacketDataRab	3401
PdrDevice Primitive Calculations	3402
GRAPHmultiLineSeparator	3402
NUMDAYS	3402
NUMHOURS	3402
PdrDevice Peg Counts	3402
PERLENSEC	3402
PERLENSEC_K	3403
pmSamplesMeasuredPdrSpLoad	3403
pmSumMeasuredPdrSpLoad	3403
PdrDevice_NodeB Primitive Calculations	3404
GRAPHmultiLineSeparator	3404
NUMDAYS	3404
NUMHOURS	3404

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PdrDevice_NodeB Peg Counts	3404
PERLENSEC	3404
PERLENSEC_K	3405
pmSamplesMeasuredPdrSpLoad	3405
pmSumMeasuredPdrSpLoad	3405
RNC_RELEASE	3406
PdrDevice_RNC Primitive Calculations	3406
GRAPHmultiLineSeparator	3406
NUMDAYS	3406
NUMHOURS	3406
PdrDevice_RNC Peg Counts	3406
PERLENSEC	3406
PERLENSEC_K	3407
pmSamplesMeasuredPdrSpLoad	3407
pmSumMeasuredPdrSpLoad	3407
RNC_RELEASE	3408
PlugInUnit_NodeB Primitive Calculations	3408
GRAPHmultiLineSeparator	3408
NUMDAYS	3408
NUMHOURS	3408
PlugInUnit_NodeB Peg Counts	3408
NodeB_RELEASE	3409
PERLENSEC	3409
PERLENSEC_K	3409
pmProcessorLoad	3409
PlugInUnit_RNC Primitive Calculations	3410
GRAPHmultiLineSeparator	3410
NUMDAYS	3410
NUMHOURS	3410
PlugInUnit_RNC Peg Counts	3410
PERLENSEC	3410
PERLENSEC_K	3411
pmProcessorLoad	3411
RNC_RELEASE	3411
PostServClass Primitive Calculations	3412
GRAPHmultiLineSeparator	3412
NUMDAYS	3412
NUMHOURS	3412
PostServClass Peg Counts	3412
PERLENSEC	3412
PERLENSEC_K	3413
pmAgpsAttempt	3413
pmAgpsSuccQoSNotOk	3413
pmAgpsSuccQoSOk	3414
pmCellIdAttempt	3414
pmCellIdSuccQoSNotOk	3414
pmCellIdSuccQoSOk	3415
pmRttAttempt	3415
pmRttSuccQoSNotOk	3415
pmRttSuccQoSOk	3416

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Prach Primitive Calculations	3416
GRAPHMultiLineSeparator	3416
NUMDAYS	3416
NUMHOURS	3417
Prach Peg Counts	3417
NodeB_RELEASE	3417
PERLENSEC	3417
PERLENSEC_K	3417
pmNoPreambleFalseDetection	3418
pmPropagationDelay_00	3418
pmPropagationDelay_01	3418
pmPropagationDelay_02	3419
pmPropagationDelay_03	3419
pmPropagationDelay_04	3419
pmPropagationDelay_05	3420
pmPropagationDelay_06	3420
pmPropagationDelay_07	3421
pmPropagationDelay_08	3421
pmPropagationDelay_09	3421
pmPropagationDelay_10	3422
pmPropagationDelay_11	3422
pmPropagationDelay_12	3422
pmPropagationDelay_13	3423
pmPropagationDelay_14	3423
pmPropagationDelay_15	3423
pmPropagationDelay_16	3424
pmPropagationDelay_17	3424
pmPropagationDelay_18	3425
pmPropagationDelay_19	3425
pmPropagationDelay_20	3425
pmPropagationDelay_21	3426
pmPropagationDelay_22	3426
pmPropagationDelay_23	3426
pmPropagationDelay_24	3427
pmPropagationDelay_25	3427
pmPropagationDelay_26	3427
pmPropagationDelay_27	3428
pmPropagationDelay_28	3428
pmPropagationDelay_29	3429
pmPropagationDelay_30	3429
pmPropagationDelay_31	3429
pmPropagationDelay_32	3430
pmPropagationDelay_33	3430
pmPropagationDelay_34	3430
pmPropagationDelay_35	3431
pmPropagationDelay_36	3431
pmPropagationDelay_37	3431
pmPropagationDelay_38	3432
pmPropagationDelay_39	3432
pmPropagationDelay_40	3433
pmReceivedPreambleSir_00	3433

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmReceivedPreambleSir_01	3433
pmReceivedPreambleSir_02	3434
pmReceivedPreambleSir_03	3434
pmReceivedPreambleSir_04	3434
pmReceivedPreambleSir_05	3435
pmReceivedPreambleSir_06	3435
pmReceivedPreambleSir_07	3435
pmReceivedPreambleSir_08	3436
pmReceivedPreambleSir_09	3436
pmReceivedPreambleSir_10	3437
pmReceivedPreambleSir_11	3437
pmReceivedPreambleSir_12	3437
pmReceivedPreambleSir_13	3438
pmReceivedPreambleSir_14	3438
pmReceivedPreambleSir_15	3438
pmReceivedPreambleSir_16	3439
pmReceivedPreambleSir_17	3439
pmReceivedPreambleSir_18	3439
pmReceivedPreambleSir_19	3440
pmReceivedPreambleSir_20	3440
pmReceivedPreambleSir_21	3441
pmReceivedPreambleSir_22	3441
pmReceivedPreambleSir_23	3441
pmReceivedPreambleSir_24	3442
pmReceivedPreambleSir_25	3442
pmReceivedPreambleSir_26	3442
pmSuccReceivedBlocks	3443
pmUnsuccReceivedBlocks	3443
RA_RNC Primitive Calculations	3443
GRAPHmultiLineSeparator	3443
NUMDAYS	3444
NUMHOURS	3444
RA_RNC Peg Counts	3444
nmo	3444
PERLENSEC	3444
PERLENSEC_K	3445
pmCnInitPagingToldleUeRa	3445
rac	3445
reservedBy	3445
RNC_RELEASE	3446
userLabel	3446
RABType Primitive Calculations	3446
Avr_PS_RAB_STBL_SUCC_RATE	3446
GRAPHmultiLineSeparator	3446
k_PAYLOAD_DL_TOT	3447
k_PAYLOAD_UL_TOT	3447
k_RAB_EST_FAIL	3447
k_RAB_EST_FAIL_RATE	3447
k_RAB_REL_FAIL	3447
k_RAB_REL_FAIL_RATE	3447

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMDAYS	3448
NUMHOURS	3448
Uplink_BLER	3448
Uplink_PS_Streaming_BLER	3448
Uplink_Speech_BLER	3448
RABType Peg Counts	3448
PERLENSEC	3448
PERLENSEC_K	3449
pmDIDchTrafficVolumeBeforeSplit	3449
pmDIFachTrafficVolume	3449
pmFaultyTransportBlocksAcUI	3450
pmNoRabEstablishAttempts	3450
pmNoRabEstablishSuccess	3450
pmNoRabReleaseAttempts	3451
pmNoRabReleaseSuccess	3451
pmSamplesRabEstablish	3451
pmSumRabEstablish	3452
pmTransportBlocksAcUI	3452
pmUIDchTrafficVolumeAfterComb	3452
pmUIRachTrafficVolume	3453
reservedBy	3453
RNC_RELEASE	3453
userLabel	3453
RACH Primitive Calculations	3454
GRAPHmultiLineSeparator	3454
NUMDAYS	3454
NUMHOURS	3454
RACH Peg Counts	3454
administrativeState	3454
aichPower	3455
aichTransmissionTiming	3455
availabilityStatus	3455
constantValueCprach	3455
maxPreambleCycle	3456
NodeB_RELEASE	3456
operationalState	3456
PERLENSEC	3456
PERLENSEC_K	3457
pmFaultyTransportBlocks	3457
pmNoRecRandomAccSuccess	3457
pmTransportBlocks	3458
powerOffsetP0	3458
powerOffsetPpm	3458
preambleRetransMax	3458
preambleSignatures	3459
preambleThreshold	3459
scramblingCodeWordNo	3459
spreadingFactor	3459
subChannelNo	3460
userLabel	3460

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RadioLinks Primitive Calculations	3460
GRAPHmultiLineSeparator	3460
NUMDAYS	3460
NUMHOURS	3461
pmAverageSirErrorP5MD_01	3461
pmAverageSirErrorP5MD_02	3461
pmAverageSirErrorP5MD_03	3461
pmAverageSirErrorP5MD_04	3461
pmAverageSirErrorP5MD_05	3462
pmAverageSirErrorP5MD_06	3462
pmAverageSirErrorP5MD_07	3462
pmAverageSirErrorP5MD_08	3462
pmAverageSirErrorP5MD_09	3462
pmAverageSirErrorP5MD_10	3463
pmAverageSirErrorP5MD_11	3463
pmAverageSirErrorP5MD_12	3463
pmAverageSirErrorP5MD_13	3463
pmAverageSirErrorP5MD_14	3463
pmAverageSirErrorP5MD_15	3464
pmAverageSirErrorP5MD_16	3464
pmAverageSirErrorP5MD_17	3464
pmAverageSirErrorP5MD_18	3464
pmAverageSirErrorP5MD_19	3465
pmAverageSirErrorP5MD_20	3465
pmAverageSirErrorP5MD_21	3465
pmAverageSirErrorP5MD_22	3465
pmAverageSirErrorP5MD_23	3465
pmAverageSirErrorP5MD_24	3466
pmAverageSirErrorP5MD_25	3466
pmAverageSirErrorP5MD_26	3466
pmAverageSirErrorP5MD_27	3466
pmAverageSirErrorP5MD_28	3466
pmAverageSirErrorP5MD_29	3467
pmAverageSirErrorP5MD_30	3467
pmAverageSirErrorP5MD_31	3467
pmAverageSirErrorP5MD_32	3467
pmAverageSirErrorP5MD_33	3468
pmAverageSirErrorP5MD_34	3468
pmAverageSirErrorP5MD_35	3468
pmAverageSirErrorP5MD_36	3468
pmAverageSirErrorP5MD_37	3468
pmAverageSirErrorP5MD_38	3469
pmAverageSirErrorP5MD_39	3469
pmAverageSirErrorP5MD_40	3469
pmAverageSirP5MD_01	3469
pmAverageSirP5MD_02	3469
pmAverageSirP5MD_03	3470
pmAverageSirP5MD_04	3470
pmAverageSirP5MD_05	3470
pmAverageSirP5MD_06	3470
pmAverageSirP5MD_07	3470

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageSirP5MD_08	3470
pmAverageSirP5MD_09	3470
pmAverageSirP5MD_10	3471
pmAverageSirP5MD_11	3471
pmAverageSirP5MD_12	3471
pmAverageSirP5MD_13	3471
pmAverageSirP5MD_14	3471
pmAverageSirP5MD_15	3471
pmAverageSirP5MD_16	3471
pmAverageSirP5MD_17	3472
pmAverageSirP5MD_18	3472
pmAverageSirP5MD_19	3472
pmAverageSirP5MD_20	3472
pmAverageSirP5MD_21	3472
pmAverageSirP5MD_22	3472
pmAverageSirP5MD_23	3472
pmAverageSirP5MD_24	3473
pmAverageSirP5MD_25	3473
pmAverageSirP5MD_26	3473
pmAverageSirP5MD_27	3473
pmAverageSirP5MD_28	3473
pmAverageSirP5MD_29	3473
pmAverageSirP5MD_30	3473
pmAverageSirP5MD_31	3474
pmAverageSirP5MD_32	3474
pmAverageSirP5MD_33	3474
pmAverageSirP5MD_34	3474
pmAverageSirP5MD_35	3474
pmAverageSirP5MD_36	3474
Radiolinks Peg Counts	3474
NodeB_RELEASE	3475
PERLENSEC	3475
PERLENSEC_K	3475
pmAverageSir_00	3475
pmAverageSir_01	3476
pmAverageSir_02	3476
pmAverageSir_03	3476
pmAverageSir_04	3477
pmAverageSir_05	3477
pmAverageSir_06	3477
pmAverageSir_07	3478
pmAverageSir_08	3478
pmAverageSir_09	3478
pmAverageSir_10	3479
pmAverageSir_11	3479
pmAverageSir_12	3479
pmAverageSir_13	3480
pmAverageSir_14	3480
pmAverageSir_15	3480
pmAverageSir_16	3480
pmAverageSir_17	3481

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageSir_18	3481
pmAverageSir_19	3481
pmAverageSir_20	3482
pmAverageSir_21	3482
pmAverageSir_22	3482
pmAverageSir_23	3483
pmAverageSir_24	3483
pmAverageSir_25	3483
pmAverageSir_26	3484
pmAverageSir_27	3484
pmAverageSir_28	3484
pmAverageSir_29	3484
pmAverageSir_30	3485
pmAverageSir_31	3485
pmAverageSir_32	3485
pmAverageSir_33	3486
pmAverageSir_34	3486
pmAverageSir_35	3486
pmAverageSir_36	3487
pmAverageSir_37	3487
pmAverageSir_38	3487
pmAverageSir_39	3488
pmAverageSir_40	3488
pmAverageSir_41	3488
pmAverageSir_42	3488
pmAverageSir_43	3489
pmAverageSir_44	3489
pmAverageSir_45	3489
pmAverageSir_46	3490
pmAverageSir_47	3490
pmAverageSir_48	3490
pmAverageSir_49	3491
pmAverageSir_50	3491
pmAverageSir_51	3491
pmAverageSir_52	3492
pmAverageSir_53	3492
pmAverageSir_54	3492
pmAverageSir_55	3492
pmAverageSir_56	3493
pmAverageSir_57	3493
pmAverageSir_58	3493
pmAverageSir_59	3494
pmAverageSir_60	3494
pmAverageSir_61	3494
pmAverageSir_62	3495
pmAverageSir_63	3495
pmAverageSirError_01	3495
pmAverageSirError_02	3495
pmAverageSirError_03	3495
pmAverageSirError_04	3496
pmAverageSirError_05	3496

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageSirError_06	3496
pmAverageSirError_07	3496
pmAverageSirError_08	3496
pmAverageSirError_09	3496
pmAverageSirError_10	3496
pmAverageSirError_11	3496
pmAverageSirError_12	3496
pmAverageSirError_13	3496
pmAverageSirError_14	3497
pmAverageSirError_15	3497
pmAverageSirError_16	3497
pmAverageSirError_17	3497
pmAverageSirError_18	3497
pmAverageSirError_19	3497
pmAverageSirError_20	3497
pmAverageSirError_21	3497
pmAverageSirError_22	3497
pmAverageSirError_23	3497
pmAverageSirError_24	3498
pmAverageSirError_25	3498
pmAverageSirError_26	3498
pmAverageSirError_27	3498
pmAverageSirError_28	3498
pmAverageSirError_29	3498
pmAverageSirError_30	3498
pmAverageSirError_31	3498
pmAverageSirError_32	3498
pmAverageSirError_33	3498
pmAverageSirError_34	3499
pmAverageSirError_35	3499
pmAverageSirError_36	3499
pmAverageSirError_37	3499
pmAverageSirError_38	3499
pmAverageSirError_39	3499
pmAverageSirError_40	3499
pmAverageSirError_41	3499
pmAverageSirError_42	3499
pmAverageSirError_43	3499
pmAverageSirError_44	3500
pmAverageSirError_45	3500
pmAverageSirError_46	3500
pmAverageSirError_47	3500
pmAverageSirError_48	3500
pmAverageSirError_49	3500
pmAverageSirError_50	3500
pmAverageSirError_51	3500
pmAverageSirError_52	3500
pmAverageSirError_53	3500
pmAverageSirError_54	3501
pmAverageSirError_55	3501
pmAverageSirError_56	3501

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmAverageSirError_57	3501
pmAverageSirError_58	3501
pmAverageSirError_59	3501
pmAverageSirError_60	3501
pmAverageSirError_61	3501
pmAverageSirError_62	3501
pmAverageSirError_63	3501
pmAverageSirErrorP5MD_00	3502
pmAverageSirErrorP5MD_41	3502
pmAverageSirP5MD_00	3502
pmAverageSirP5MD_37	3503
pmDpcchBer_000	3503
pmDpcchBer_001	3503
pmDpcchBer_002	3504
pmDpcchBer_003	3504
pmDpcchBer_004	3504
pmDpcchBer_005	3504
pmDpcchBer_006	3505
pmDpcchBer_007	3505
pmDpcchBer_008	3505
pmDpcchBer_009	3506
pmDpcchBer_010	3506
pmDpcchBer_011	3506
pmDpcchBer_012	3507
pmDpcchBer_013	3507
pmDpcchBer_014	3507
pmDpcchBer_015	3508
pmDpcchBer_016	3508
pmDpcchBer_017	3508
pmDpcchBer_018	3508
pmDpcchBer_019	3509
pmDpcchBer_020	3509
pmDpcchBer_021	3509
pmDpcchBer_022	3510
pmDpcchBer_023	3510
pmDpcchBer_024	3510
pmDpcchBer_025	3511
pmDpcchBer_026	3511
pmDpcchBer_027	3511
pmDpcchBer_028	3512
pmDpcchBer_029	3512
pmDpcchBer_030	3512
pmDpcchBer_031	3512
pmDpcchBer_032	3513
pmDpcchBer_033	3513
pmDpcchBer_034	3513
pmDpcchBer_035	3514
pmDpcchBer_036	3514
pmDpcchBer_037	3514
pmDpcchBer_038	3515
pmDpcchBer_039	3515

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpcchBer_040	3515
pmDpcchBer_041	3516
pmDpcchBer_042	3516
pmDpcchBer_043	3516
pmDpcchBer_044	3516
pmDpcchBer_045	3517
pmDpcchBer_046	3517
pmDpcchBer_047	3517
pmDpcchBer_048	3518
pmDpcchBer_049	3518
pmDpcchBer_050	3518
pmDpcchBer_051	3519
pmDpcchBer_052	3519
pmDpcchBer_053	3519
pmDpcchBer_054	3520
pmDpcchBer_055	3520
pmDpcchBer_056	3520
pmDpcchBer_057	3520
pmDpcchBer_058	3521
pmDpcchBer_059	3521
pmDpcchBer_060	3521
pmDpcchBer_061	3522
pmDpcchBer_062	3522
pmDpcchBer_063	3522
pmDpcchBer_064	3523
pmDpcchBer_065	3523
pmDpcchBer_066	3523
pmDpcchBer_067	3524
pmDpcchBer_068	3524
pmDpcchBer_069	3524
pmDpcchBer_070	3524
pmDpcchBer_071	3525
pmDpcchBer_072	3525
pmDpcchBer_073	3525
pmDpcchBer_074	3526
pmDpcchBer_075	3526
pmDpcchBer_076	3526
pmDpcchBer_077	3527
pmDpcchBer_078	3527
pmDpcchBer_079	3527
pmDpcchBer_080	3528
pmDpcchBer_081	3528
pmDpcchBer_082	3528
pmDpcchBer_083	3528
pmDpcchBer_084	3529
pmDpcchBer_085	3529
pmDpcchBer_086	3529
pmDpcchBer_087	3530
pmDpcchBer_088	3530
pmDpcchBer_089	3530
pmDpcchBer_090	3531

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpcchBer_091	3531
pmDpcchBer_092	3531
pmDpcchBer_093	3532
pmDpcchBer_094	3532
pmDpcchBer_095	3532
pmDpcchBer_096	3532
pmDpcchBer_097	3533
pmDpcchBer_098	3533
pmDpcchBer_099	3533
pmDpcchBer_100	3534
pmDpcchBer_101	3534
pmDpcchBer_102	3534
pmDpcchBer_103	3535
pmDpcchBer_104	3535
pmDpcchBer_105	3535
pmDpcchBer_106	3536
pmDpcchBer_107	3536
pmDpcchBer_108	3536
pmDpcchBer_109	3536
pmDpcchBer_110	3537
pmDpcchBer_111	3537
pmDpcchBer_112	3537
pmDpcchBer_113	3538
pmDpcchBer_114	3538
pmDpcchBer_115	3538
pmDpcchBer_116	3539
pmDpcchBer_117	3539
pmDpcchBer_118	3539
pmDpcchBer_119	3540
pmDpcchBer_120	3540
pmDpcchBer_121	3540
pmDpcchBer_122	3540
pmDpcchBer_123	3541
pmDpcchBer_124	3541
pmDpcchBer_125	3541
pmDpcchBer_126	3542
pmDpcchBer_127	3542
pmDpcchBer_128	3542
pmDpcchBerP5MD_00	3543
pmDpcchBerP5MD_01	3543
pmDpcchBerP5MD_02	3543
pmDpcchBerP5MD_03	3544
pmDpcchBerP5MD_04	3544
pmDpcchBerP5MD_05	3545
pmDpcchBerP5MD_06	3545
pmDpcchBerP5MD_07	3545
pmDpcchBerP5MD_08	3546
pmDpcchBerP5MD_09	3546
pmDpcchBerP5MD_10	3546
pmDpcchBerP5MD_11	3547
pmDpcchBerP5MD_12	3547

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpcchBerP5MD_13	3548
pmDpcchBerP5MD_14	3548
pmDpcchBerP5MD_15	3548
pmDpcchBerP5MD_16	3549
pmDpcchBerP5MD_17	3549
pmDpcchBerP5MD_18	3550
pmDpcchBerP5MD_19	3550
pmDpcchBerP5MD_20	3550
pmDpcchBerP5MD_21	3551
pmDpcchBerP5MD_22	3551
pmDpcchBerP5MD_23	3551
pmDpcchBerP5MD_24	3552
pmDpchCodePowerSf128_00	3552
pmDpchCodePowerSf128_01	3553
pmDpchCodePowerSf128_02	3553
pmDpchCodePowerSf128_03	3553
pmDpchCodePowerSf128_04	3554
pmDpchCodePowerSf128_05	3554
pmDpchCodePowerSf128_06	3554
pmDpchCodePowerSf128_07	3555
pmDpchCodePowerSf128_08	3555
pmDpchCodePowerSf128_09	3555
pmDpchCodePowerSf128_10	3556
pmDpchCodePowerSf128_11	3556
pmDpchCodePowerSf128_12	3556
pmDpchCodePowerSf128_13	3557
pmDpchCodePowerSf128_14	3557
pmDpchCodePowerSf128_15	3557
pmDpchCodePowerSf128_16	3558
pmDpchCodePowerSf128_17	3558
pmDpchCodePowerSf128_18	3558
pmDpchCodePowerSf128_19	3559
pmDpchCodePowerSf128_20	3559
pmDpchCodePowerSf128_21	3559
pmDpchCodePowerSf128_22	3560
pmDpchCodePowerSf128_23	3560
pmDpchCodePowerSf128_24	3560
pmDpchCodePowerSf128_25	3561
pmDpchCodePowerSf128_26	3561
pmDpchCodePowerSf128_27	3561
pmDpchCodePowerSf128_28	3562
pmDpchCodePowerSf128_29	3562
pmDpchCodePowerSf128_30	3562
pmDpchCodePowerSf128_31	3563
pmDpchCodePowerSf128_32	3563
pmDpchCodePowerSf128_33	3563
pmDpchCodePowerSf128_34	3564
pmDpchCodePowerSf128_35	3564
pmDpchCodePowerSf128_36	3564
pmDpchCodePowerSf128_37	3565
pmDpchCodePowerSf128_38	3565

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf128_39	3565
pmDpchCodePowerSf128_40	3566
pmDpchCodePowerSf128_41	3566
pmDpchCodePowerSf128_42	3566
pmDpchCodePowerSf128_43	3567
pmDpchCodePowerSf128_44	3567
pmDpchCodePowerSf128_45	3567
pmDpchCodePowerSf128_46	3568
pmDpchCodePowerSf128_47	3568
pmDpchCodePowerSf128_48	3568
pmDpchCodePowerSf128_49	3569
pmDpchCodePowerSf128_50	3569
pmDpchCodePowerSf128_51	3569
pmDpchCodePowerSf128_52	3570
pmDpchCodePowerSf128_53	3570
pmDpchCodePowerSf128_54	3570
pmDpchCodePowerSf128_55	3571
pmDpchCodePowerSf128_56	3571
pmDpchCodePowerSf128_57	3571
pmDpchCodePowerSf128_58	3572
pmDpchCodePowerSf128_59	3572
pmDpchCodePowerSf128_60	3572
pmDpchCodePowerSf128_61	3573
pmDpchCodePowerSf128_62	3573
pmDpchCodePowerSf128_63	3573
pmDpchCodePowerSf128_64	3574
pmDpchCodePowerSf128_65	3574
pmDpchCodePowerSf128_66	3574
pmDpchCodePowerSf128_67	3575
pmDpchCodePowerSf128_68	3575
pmDpchCodePowerSf128_69	3575
pmDpchCodePowerSf128_70	3576
pmDpchCodePowerSf128_71	3576
pmDpchCodePowerSf128_72	3576
pmDpchCodePowerSf128_73	3577
pmDpchCodePowerSf128_74	3577
pmDpchCodePowerSf16_00	3577
pmDpchCodePowerSf16_01	3578
pmDpchCodePowerSf16_02	3578
pmDpchCodePowerSf16_03	3578
pmDpchCodePowerSf16_04	3579
pmDpchCodePowerSf16_05	3579
pmDpchCodePowerSf16_06	3579
pmDpchCodePowerSf16_07	3580
pmDpchCodePowerSf16_08	3580
pmDpchCodePowerSf16_09	3580
pmDpchCodePowerSf16_10	3581
pmDpchCodePowerSf16_11	3581
pmDpchCodePowerSf16_12	3581
pmDpchCodePowerSf16_13	3582
pmDpchCodePowerSf16_14	3582

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf16_15	3582
pmDpchCodePowerSf16_16	3583
pmDpchCodePowerSf16_17	3583
pmDpchCodePowerSf16_18	3583
pmDpchCodePowerSf16_19	3584
pmDpchCodePowerSf16_20	3584
pmDpchCodePowerSf16_21	3584
pmDpchCodePowerSf16_22	3585
pmDpchCodePowerSf16_23	3585
pmDpchCodePowerSf16_24	3585
pmDpchCodePowerSf16_25	3586
pmDpchCodePowerSf16_26	3586
pmDpchCodePowerSf16_27	3586
pmDpchCodePowerSf16_28	3587
pmDpchCodePowerSf16_29	3587
pmDpchCodePowerSf16_30	3587
pmDpchCodePowerSf16_31	3588
pmDpchCodePowerSf16_32	3588
pmDpchCodePowerSf16_33	3588
pmDpchCodePowerSf16_34	3589
pmDpchCodePowerSf16_35	3589
pmDpchCodePowerSf16_36	3589
pmDpchCodePowerSf16_37	3590
pmDpchCodePowerSf16_38	3590
pmDpchCodePowerSf16_39	3590
pmDpchCodePowerSf16_40	3591
pmDpchCodePowerSf16_41	3591
pmDpchCodePowerSf16_42	3591
pmDpchCodePowerSf16_43	3592
pmDpchCodePowerSf16_44	3592
pmDpchCodePowerSf16_45	3592
pmDpchCodePowerSf16_46	3593
pmDpchCodePowerSf16_47	3593
pmDpchCodePowerSf16_48	3593
pmDpchCodePowerSf16_49	3594
pmDpchCodePowerSf16_50	3594
pmDpchCodePowerSf16_51	3594
pmDpchCodePowerSf16_52	3595
pmDpchCodePowerSf16_53	3595
pmDpchCodePowerSf16_54	3595
pmDpchCodePowerSf16_55	3596
pmDpchCodePowerSf16_56	3596
pmDpchCodePowerSf16_57	3596
pmDpchCodePowerSf16_58	3597
pmDpchCodePowerSf16_59	3597
pmDpchCodePowerSf16_60	3597
pmDpchCodePowerSf16_61	3598
pmDpchCodePowerSf16_62	3598
pmDpchCodePowerSf16_63	3598
pmDpchCodePowerSf16_64	3599
pmDpchCodePowerSf16_65	3599

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf16_66	3599
pmDpchCodePowerSf16_67	3600
pmDpchCodePowerSf16_68	3600
pmDpchCodePowerSf16_69	3600
pmDpchCodePowerSf16_70	3601
pmDpchCodePowerSf16_71	3601
pmDpchCodePowerSf16_72	3601
pmDpchCodePowerSf16_73	3602
pmDpchCodePowerSf16_74	3602
pmDpchCodePowerSf256_00	3602
pmDpchCodePowerSf256_01	3603
pmDpchCodePowerSf256_02	3603
pmDpchCodePowerSf256_03	3603
pmDpchCodePowerSf256_04	3604
pmDpchCodePowerSf256_05	3604
pmDpchCodePowerSf256_06	3604
pmDpchCodePowerSf256_07	3605
pmDpchCodePowerSf256_08	3605
pmDpchCodePowerSf256_09	3605
pmDpchCodePowerSf256_10	3606
pmDpchCodePowerSf256_11	3606
pmDpchCodePowerSf256_12	3606
pmDpchCodePowerSf256_13	3607
pmDpchCodePowerSf256_14	3607
pmDpchCodePowerSf256_15	3607
pmDpchCodePowerSf256_16	3608
pmDpchCodePowerSf256_17	3608
pmDpchCodePowerSf256_18	3608
pmDpchCodePowerSf256_19	3609
pmDpchCodePowerSf256_20	3609
pmDpchCodePowerSf256_21	3609
pmDpchCodePowerSf256_22	3610
pmDpchCodePowerSf256_23	3610
pmDpchCodePowerSf256_24	3610
pmDpchCodePowerSf256_25	3611
pmDpchCodePowerSf256_26	3611
pmDpchCodePowerSf256_27	3611
pmDpchCodePowerSf256_28	3612
pmDpchCodePowerSf256_29	3612
pmDpchCodePowerSf256_30	3612
pmDpchCodePowerSf256_31	3613
pmDpchCodePowerSf256_32	3613
pmDpchCodePowerSf256_33	3613
pmDpchCodePowerSf256_34	3614
pmDpchCodePowerSf256_35	3614
pmDpchCodePowerSf256_36	3614
pmDpchCodePowerSf256_37	3615
pmDpchCodePowerSf256_38	3615
pmDpchCodePowerSf256_39	3615
pmDpchCodePowerSf256_40	3616
pmDpchCodePowerSf256_41	3616

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf256_42	3616
pmDpchCodePowerSf256_43	3617
pmDpchCodePowerSf256_44	3617
pmDpchCodePowerSf256_45	3617
pmDpchCodePowerSf256_46	3618
pmDpchCodePowerSf256_47	3618
pmDpchCodePowerSf256_48	3618
pmDpchCodePowerSf256_49	3619
pmDpchCodePowerSf256_50	3619
pmDpchCodePowerSf256_51	3619
pmDpchCodePowerSf256_52	3620
pmDpchCodePowerSf256_53	3620
pmDpchCodePowerSf256_54	3620
pmDpchCodePowerSf256_55	3621
pmDpchCodePowerSf256_56	3621
pmDpchCodePowerSf256_57	3621
pmDpchCodePowerSf256_58	3622
pmDpchCodePowerSf256_59	3622
pmDpchCodePowerSf256_60	3622
pmDpchCodePowerSf256_61	3623
pmDpchCodePowerSf256_62	3623
pmDpchCodePowerSf256_63	3623
pmDpchCodePowerSf256_64	3624
pmDpchCodePowerSf256_65	3624
pmDpchCodePowerSf256_66	3624
pmDpchCodePowerSf256_67	3625
pmDpchCodePowerSf256_68	3625
pmDpchCodePowerSf256_69	3625
pmDpchCodePowerSf256_70	3626
pmDpchCodePowerSf256_71	3626
pmDpchCodePowerSf256_72	3626
pmDpchCodePowerSf256_73	3627
pmDpchCodePowerSf256_74	3627
pmDpchCodePowerSf32_00	3627
pmDpchCodePowerSf32_01	3628
pmDpchCodePowerSf32_02	3628
pmDpchCodePowerSf32_03	3628
pmDpchCodePowerSf32_04	3629
pmDpchCodePowerSf32_05	3629
pmDpchCodePowerSf32_06	3629
pmDpchCodePowerSf32_07	3630
pmDpchCodePowerSf32_08	3630
pmDpchCodePowerSf32_09	3630
pmDpchCodePowerSf32_10	3631
pmDpchCodePowerSf32_11	3631
pmDpchCodePowerSf32_12	3631
pmDpchCodePowerSf32_13	3632
pmDpchCodePowerSf32_14	3632
pmDpchCodePowerSf32_15	3632
pmDpchCodePowerSf32_16	3633
pmDpchCodePowerSf32_17	3633

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf32_18	3633
pmDpchCodePowerSf32_19	3634
pmDpchCodePowerSf32_20	3634
pmDpchCodePowerSf32_21	3634
pmDpchCodePowerSf32_22	3635
pmDpchCodePowerSf32_23	3635
pmDpchCodePowerSf32_24	3635
pmDpchCodePowerSf32_25	3636
pmDpchCodePowerSf32_26	3636
pmDpchCodePowerSf32_27	3636
pmDpchCodePowerSf32_28	3637
pmDpchCodePowerSf32_29	3637
pmDpchCodePowerSf32_30	3637
pmDpchCodePowerSf32_31	3638
pmDpchCodePowerSf32_32	3638
pmDpchCodePowerSf32_33	3638
pmDpchCodePowerSf32_34	3639
pmDpchCodePowerSf32_35	3639
pmDpchCodePowerSf32_36	3639
pmDpchCodePowerSf32_37	3640
pmDpchCodePowerSf32_38	3640
pmDpchCodePowerSf32_39	3640
pmDpchCodePowerSf32_40	3641
pmDpchCodePowerSf32_41	3641
pmDpchCodePowerSf32_42	3641
pmDpchCodePowerSf32_43	3642
pmDpchCodePowerSf32_44	3642
pmDpchCodePowerSf32_45	3642
pmDpchCodePowerSf32_46	3643
pmDpchCodePowerSf32_47	3643
pmDpchCodePowerSf32_48	3643
pmDpchCodePowerSf32_49	3644
pmDpchCodePowerSf32_50	3644
pmDpchCodePowerSf32_51	3644
pmDpchCodePowerSf32_52	3645
pmDpchCodePowerSf32_53	3645
pmDpchCodePowerSf32_54	3645
pmDpchCodePowerSf32_55	3646
pmDpchCodePowerSf32_56	3646
pmDpchCodePowerSf32_57	3646
pmDpchCodePowerSf32_58	3647
pmDpchCodePowerSf32_59	3647
pmDpchCodePowerSf32_60	3647
pmDpchCodePowerSf32_61	3648
pmDpchCodePowerSf32_62	3648
pmDpchCodePowerSf32_63	3648
pmDpchCodePowerSf32_64	3649
pmDpchCodePowerSf32_65	3649
pmDpchCodePowerSf32_66	3649
pmDpchCodePowerSf32_67	3650
pmDpchCodePowerSf32_68	3650

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf32_69	3650
pmDpchCodePowerSf32_70	3651
pmDpchCodePowerSf32_71	3651
pmDpchCodePowerSf32_72	3651
pmDpchCodePowerSf32_73	3652
pmDpchCodePowerSf32_74	3652
pmDpchCodePowerSf4_00	3652
pmDpchCodePowerSf4_01	3653
pmDpchCodePowerSf4_02	3653
pmDpchCodePowerSf4_03	3653
pmDpchCodePowerSf4_04	3654
pmDpchCodePowerSf4_05	3654
pmDpchCodePowerSf4_06	3654
pmDpchCodePowerSf4_07	3655
pmDpchCodePowerSf4_08	3655
pmDpchCodePowerSf4_09	3655
pmDpchCodePowerSf4_10	3656
pmDpchCodePowerSf4_11	3656
pmDpchCodePowerSf4_12	3656
pmDpchCodePowerSf4_13	3657
pmDpchCodePowerSf4_14	3657
pmDpchCodePowerSf4_15	3657
pmDpchCodePowerSf4_16	3658
pmDpchCodePowerSf4_17	3658
pmDpchCodePowerSf4_18	3658
pmDpchCodePowerSf4_19	3659
pmDpchCodePowerSf4_20	3659
pmDpchCodePowerSf4_21	3659
pmDpchCodePowerSf4_22	3660
pmDpchCodePowerSf4_23	3660
pmDpchCodePowerSf4_24	3660
pmDpchCodePowerSf4_25	3661
pmDpchCodePowerSf4_26	3661
pmDpchCodePowerSf4_27	3661
pmDpchCodePowerSf4_28	3662
pmDpchCodePowerSf4_29	3662
pmDpchCodePowerSf4_30	3662
pmDpchCodePowerSf4_31	3663
pmDpchCodePowerSf4_32	3663
pmDpchCodePowerSf4_33	3663
pmDpchCodePowerSf4_34	3664
pmDpchCodePowerSf4_35	3664
pmDpchCodePowerSf4_36	3664
pmDpchCodePowerSf4_37	3665
pmDpchCodePowerSf4_38	3665
pmDpchCodePowerSf4_39	3665
pmDpchCodePowerSf4_40	3666
pmDpchCodePowerSf4_41	3666
pmDpchCodePowerSf4_42	3666
pmDpchCodePowerSf4_43	3667
pmDpchCodePowerSf4_44	3667

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf4_45	3667
pmDpchCodePowerSf4_46	3668
pmDpchCodePowerSf4_47	3668
pmDpchCodePowerSf4_48	3668
pmDpchCodePowerSf4_49	3669
pmDpchCodePowerSf4_50	3669
pmDpchCodePowerSf4_51	3669
pmDpchCodePowerSf4_52	3670
pmDpchCodePowerSf4_53	3670
pmDpchCodePowerSf4_54	3670
pmDpchCodePowerSf4_55	3671
pmDpchCodePowerSf4_56	3671
pmDpchCodePowerSf4_57	3671
pmDpchCodePowerSf4_58	3672
pmDpchCodePowerSf4_59	3672
pmDpchCodePowerSf4_60	3672
pmDpchCodePowerSf4_61	3673
pmDpchCodePowerSf4_62	3673
pmDpchCodePowerSf4_63	3673
pmDpchCodePowerSf4_64	3674
pmDpchCodePowerSf4_65	3674
pmDpchCodePowerSf4_66	3674
pmDpchCodePowerSf4_67	3675
pmDpchCodePowerSf4_68	3675
pmDpchCodePowerSf4_69	3675
pmDpchCodePowerSf4_70	3676
pmDpchCodePowerSf4_71	3676
pmDpchCodePowerSf4_72	3676
pmDpchCodePowerSf4_73	3677
pmDpchCodePowerSf4_74	3677
pmDpchCodePowerSf64_00	3677
pmDpchCodePowerSf64_01	3678
pmDpchCodePowerSf64_02	3678
pmDpchCodePowerSf64_03	3678
pmDpchCodePowerSf64_04	3679
pmDpchCodePowerSf64_05	3679
pmDpchCodePowerSf64_06	3679
pmDpchCodePowerSf64_07	3680
pmDpchCodePowerSf64_08	3680
pmDpchCodePowerSf64_09	3680
pmDpchCodePowerSf64_10	3681
pmDpchCodePowerSf64_11	3681
pmDpchCodePowerSf64_12	3681
pmDpchCodePowerSf64_13	3682
pmDpchCodePowerSf64_14	3682
pmDpchCodePowerSf64_15	3682
pmDpchCodePowerSf64_16	3683
pmDpchCodePowerSf64_17	3683
pmDpchCodePowerSf64_18	3683
pmDpchCodePowerSf64_19	3684
pmDpchCodePowerSf64_20	3684

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf64_21	3684
pmDpchCodePowerSf64_22	3685
pmDpchCodePowerSf64_23	3685
pmDpchCodePowerSf64_24	3685
pmDpchCodePowerSf64_25	3686
pmDpchCodePowerSf64_26	3686
pmDpchCodePowerSf64_27	3686
pmDpchCodePowerSf64_28	3687
pmDpchCodePowerSf64_29	3687
pmDpchCodePowerSf64_30	3687
pmDpchCodePowerSf64_31	3688
pmDpchCodePowerSf64_32	3688
pmDpchCodePowerSf64_33	3688
pmDpchCodePowerSf64_34	3689
pmDpchCodePowerSf64_35	3689
pmDpchCodePowerSf64_36	3689
pmDpchCodePowerSf64_37	3690
pmDpchCodePowerSf64_38	3690
pmDpchCodePowerSf64_39	3690
pmDpchCodePowerSf64_40	3691
pmDpchCodePowerSf64_41	3691
pmDpchCodePowerSf64_42	3691
pmDpchCodePowerSf64_43	3692
pmDpchCodePowerSf64_44	3692
pmDpchCodePowerSf64_45	3692
pmDpchCodePowerSf64_46	3693
pmDpchCodePowerSf64_47	3693
pmDpchCodePowerSf64_48	3693
pmDpchCodePowerSf64_49	3694
pmDpchCodePowerSf64_50	3694
pmDpchCodePowerSf64_51	3694
pmDpchCodePowerSf64_52	3695
pmDpchCodePowerSf64_53	3695
pmDpchCodePowerSf64_54	3695
pmDpchCodePowerSf64_55	3696
pmDpchCodePowerSf64_56	3696
pmDpchCodePowerSf64_57	3696
pmDpchCodePowerSf64_58	3697
pmDpchCodePowerSf64_59	3697
pmDpchCodePowerSf64_60	3697
pmDpchCodePowerSf64_61	3698
pmDpchCodePowerSf64_62	3698
pmDpchCodePowerSf64_63	3698
pmDpchCodePowerSf64_64	3699
pmDpchCodePowerSf64_65	3699
pmDpchCodePowerSf64_66	3699
pmDpchCodePowerSf64_67	3700
pmDpchCodePowerSf64_68	3700
pmDpchCodePowerSf64_69	3700
pmDpchCodePowerSf64_70	3701
pmDpchCodePowerSf64_71	3701

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf64_72	3701
pmDpchCodePowerSf64_73	3702
pmDpchCodePowerSf64_74	3702
pmDpchCodePowerSf8_00	3702
pmDpchCodePowerSf8_01	3703
pmDpchCodePowerSf8_02	3703
pmDpchCodePowerSf8_03	3703
pmDpchCodePowerSf8_04	3704
pmDpchCodePowerSf8_05	3704
pmDpchCodePowerSf8_06	3704
pmDpchCodePowerSf8_07	3705
pmDpchCodePowerSf8_08	3705
pmDpchCodePowerSf8_09	3705
pmDpchCodePowerSf8_10	3706
pmDpchCodePowerSf8_11	3706
pmDpchCodePowerSf8_12	3706
pmDpchCodePowerSf8_13	3707
pmDpchCodePowerSf8_14	3707
pmDpchCodePowerSf8_15	3707
pmDpchCodePowerSf8_16	3708
pmDpchCodePowerSf8_17	3708
pmDpchCodePowerSf8_18	3708
pmDpchCodePowerSf8_19	3709
pmDpchCodePowerSf8_20	3709
pmDpchCodePowerSf8_21	3709
pmDpchCodePowerSf8_22	3710
pmDpchCodePowerSf8_23	3710
pmDpchCodePowerSf8_24	3710
pmDpchCodePowerSf8_25	3711
pmDpchCodePowerSf8_26	3711
pmDpchCodePowerSf8_27	3711
pmDpchCodePowerSf8_28	3712
pmDpchCodePowerSf8_29	3712
pmDpchCodePowerSf8_30	3712
pmDpchCodePowerSf8_31	3713
pmDpchCodePowerSf8_32	3713
pmDpchCodePowerSf8_33	3713
pmDpchCodePowerSf8_34	3714
pmDpchCodePowerSf8_35	3714
pmDpchCodePowerSf8_36	3714
pmDpchCodePowerSf8_37	3715
pmDpchCodePowerSf8_38	3715
pmDpchCodePowerSf8_39	3715
pmDpchCodePowerSf8_40	3716
pmDpchCodePowerSf8_41	3716
pmDpchCodePowerSf8_42	3716
pmDpchCodePowerSf8_43	3717
pmDpchCodePowerSf8_44	3717
pmDpchCodePowerSf8_45	3717
pmDpchCodePowerSf8_46	3718
pmDpchCodePowerSf8_47	3718

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePowerSf8_48	3718
pmDpchCodePowerSf8_49	3719
pmDpchCodePowerSf8_50	3719
pmDpchCodePowerSf8_51	3719
pmDpchCodePowerSf8_52	3720
pmDpchCodePowerSf8_53	3720
pmDpchCodePowerSf8_54	3720
pmDpchCodePowerSf8_55	3721
pmDpchCodePowerSf8_56	3721
pmDpchCodePowerSf8_57	3721
pmDpchCodePowerSf8_58	3722
pmDpchCodePowerSf8_59	3722
pmDpchCodePowerSf8_60	3722
pmDpchCodePowerSf8_61	3723
pmDpchCodePowerSf8_62	3723
pmDpchCodePowerSf8_63	3723
pmDpchCodePowerSf8_64	3724
pmDpchCodePowerSf8_65	3724
pmDpchCodePowerSf8_66	3724
pmDpchCodePowerSf8_67	3725
pmDpchCodePowerSf8_68	3725
pmDpchCodePowerSf8_69	3725
pmDpchCodePowerSf8_70	3726
pmDpchCodePowerSf8_71	3726
pmDpchCodePowerSf8_72	3726
pmDpchCodePowerSf8_73	3727
pmDpchCodePowerSf8_74	3727
pmDpchCodePwrSf128P5MD_00	3727
pmDpchCodePwrSf128P5MD_01	3728
pmDpchCodePwrSf128P5MD_02	3728
pmDpchCodePwrSf128P5MD_03	3728
pmDpchCodePwrSf128P5MD_04	3729
pmDpchCodePwrSf128P5MD_05	3729
pmDpchCodePwrSf128P5MD_06	3730
pmDpchCodePwrSf128P5MD_07	3730
pmDpchCodePwrSf128P5MD_08	3730
pmDpchCodePwrSf128P5MD_09	3731
pmDpchCodePwrSf128P5MD_10	3731
pmDpchCodePwrSf128P5MD_11	3731
pmDpchCodePwrSf128P5MD_12	3732
pmDpchCodePwrSf128P5MD_13	3732
pmDpchCodePwrSf128P5MD_14	3733
pmDpchCodePwrSf128P5MD_15	3733
pmDpchCodePwrSf128P5MD_16	3733
pmDpchCodePwrSf128P5MD_17	3734
pmDpchCodePwrSf128P5MD_18	3734
pmDpchCodePwrSf128P5MD_19	3735
pmDpchCodePwrSf128P5MD_20	3735
pmDpchCodePwrSf128P5MD_21	3735
pmDpchCodePwrSf128P5MD_22	3736
pmDpchCodePwrSf128P5MD_23	3736

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePwrSf128P5MD_24	3736
pmDpchCodePwrSf128P5MD_25	3737
pmDpchCodePwrSf128P5MD_26	3737
pmDpchCodePwrSf128P5MD_27	3738
pmDpchCodePwrSf128P5MD_28	3738
pmDpchCodePwrSf128P5MD_29	3738
pmDpchCodePwrSf128P5MD_30	3739
pmDpchCodePwrSf128P5MD_31	3739
pmDpchCodePwrSf128P5MD_32	3740
pmDpchCodePwrSf128P5MD_33	3740
pmDpchCodePwrSf128P5MD_34	3740
pmDpchCodePwrSf128P5MD_35	3741
pmDpchCodePwrSf128P5MD_36	3741
pmDpchCodePwrSf128P5MD_37	3741
pmDpchCodePwrSf16P5MD_00	3742
pmDpchCodePwrSf16P5MD_01	3742
pmDpchCodePwrSf16P5MD_02	3743
pmDpchCodePwrSf16P5MD_03	3743
pmDpchCodePwrSf16P5MD_04	3743
pmDpchCodePwrSf16P5MD_05	3744
pmDpchCodePwrSf16P5MD_06	3744
pmDpchCodePwrSf16P5MD_07	3745
pmDpchCodePwrSf16P5MD_08	3745
pmDpchCodePwrSf16P5MD_09	3745
pmDpchCodePwrSf16P5MD_10	3746
pmDpchCodePwrSf16P5MD_11	3746
pmDpchCodePwrSf16P5MD_12	3746
pmDpchCodePwrSf16P5MD_13	3747
pmDpchCodePwrSf16P5MD_14	3747
pmDpchCodePwrSf16P5MD_15	3748
pmDpchCodePwrSf16P5MD_16	3748
pmDpchCodePwrSf16P5MD_17	3748
pmDpchCodePwrSf16P5MD_18	3749
pmDpchCodePwrSf16P5MD_19	3749
pmDpchCodePwrSf16P5MD_20	3750
pmDpchCodePwrSf16P5MD_21	3750
pmDpchCodePwrSf16P5MD_22	3750
pmDpchCodePwrSf16P5MD_23	3751
pmDpchCodePwrSf16P5MD_24	3751
pmDpchCodePwrSf16P5MD_25	3751
pmDpchCodePwrSf16P5MD_26	3752
pmDpchCodePwrSf16P5MD_27	3752
pmDpchCodePwrSf16P5MD_28	3753
pmDpchCodePwrSf16P5MD_29	3753
pmDpchCodePwrSf16P5MD_30	3753
pmDpchCodePwrSf16P5MD_31	3754
pmDpchCodePwrSf16P5MD_32	3754
pmDpchCodePwrSf16P5MD_33	3755
pmDpchCodePwrSf16P5MD_34	3755
pmDpchCodePwrSf16P5MD_35	3755
pmDpchCodePwrSf16P5MD_36	3756

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePwrSf16P5MD_37	3756
pmDpchCodePwrSf256P5MD_00	3756
pmDpchCodePwrSf256P5MD_01	3757
pmDpchCodePwrSf256P5MD_02	3757
pmDpchCodePwrSf256P5MD_03	3758
pmDpchCodePwrSf256P5MD_04	3758
pmDpchCodePwrSf256P5MD_05	3758
pmDpchCodePwrSf256P5MD_06	3759
pmDpchCodePwrSf256P5MD_07	3759
pmDpchCodePwrSf256P5MD_08	3760
pmDpchCodePwrSf256P5MD_09	3760
pmDpchCodePwrSf256P5MD_10	3760
pmDpchCodePwrSf256P5MD_11	3761
pmDpchCodePwrSf256P5MD_12	3761
pmDpchCodePwrSf256P5MD_13	3761
pmDpchCodePwrSf256P5MD_14	3762
pmDpchCodePwrSf256P5MD_15	3762
pmDpchCodePwrSf256P5MD_16	3763
pmDpchCodePwrSf256P5MD_17	3763
pmDpchCodePwrSf256P5MD_18	3763
pmDpchCodePwrSf256P5MD_19	3764
pmDpchCodePwrSf256P5MD_20	3764
pmDpchCodePwrSf256P5MD_21	3765
pmDpchCodePwrSf256P5MD_22	3765
pmDpchCodePwrSf256P5MD_23	3765
pmDpchCodePwrSf256P5MD_24	3766
pmDpchCodePwrSf256P5MD_25	3766
pmDpchCodePwrSf256P5MD_26	3766
pmDpchCodePwrSf256P5MD_27	3767
pmDpchCodePwrSf256P5MD_28	3767
pmDpchCodePwrSf256P5MD_29	3768
pmDpchCodePwrSf256P5MD_30	3768
pmDpchCodePwrSf256P5MD_31	3768
pmDpchCodePwrSf256P5MD_32	3769
pmDpchCodePwrSf256P5MD_33	3769
pmDpchCodePwrSf256P5MD_34	3770
pmDpchCodePwrSf256P5MD_35	3770
pmDpchCodePwrSf256P5MD_36	3770
pmDpchCodePwrSf256P5MD_37	3771
pmDpchCodePwrSf32P5MD_00	3771
pmDpchCodePwrSf32P5MD_01	3771
pmDpchCodePwrSf32P5MD_02	3772
pmDpchCodePwrSf32P5MD_03	3772
pmDpchCodePwrSf32P5MD_04	3773
pmDpchCodePwrSf32P5MD_05	3773
pmDpchCodePwrSf32P5MD_06	3773
pmDpchCodePwrSf32P5MD_07	3774
pmDpchCodePwrSf32P5MD_08	3774
pmDpchCodePwrSf32P5MD_09	3775
pmDpchCodePwrSf32P5MD_10	3775
pmDpchCodePwrSf32P5MD_11	3775

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePwrSf32P5MD_12	3776
pmDpchCodePwrSf32P5MD_13	3776
pmDpchCodePwrSf32P5MD_14	3776
pmDpchCodePwrSf32P5MD_15	3777
pmDpchCodePwrSf32P5MD_16	3777
pmDpchCodePwrSf32P5MD_17	3778
pmDpchCodePwrSf32P5MD_18	3778
pmDpchCodePwrSf32P5MD_19	3778
pmDpchCodePwrSf32P5MD_20	3779
pmDpchCodePwrSf32P5MD_21	3779
pmDpchCodePwrSf32P5MD_22	3780
pmDpchCodePwrSf32P5MD_23	3780
pmDpchCodePwrSf32P5MD_24	3780
pmDpchCodePwrSf32P5MD_25	3781
pmDpchCodePwrSf32P5MD_26	3781
pmDpchCodePwrSf32P5MD_27	3781
pmDpchCodePwrSf32P5MD_28	3782
pmDpchCodePwrSf32P5MD_29	3782
pmDpchCodePwrSf32P5MD_30	3783
pmDpchCodePwrSf32P5MD_31	3783
pmDpchCodePwrSf32P5MD_32	3783
pmDpchCodePwrSf32P5MD_33	3784
pmDpchCodePwrSf32P5MD_34	3784
pmDpchCodePwrSf32P5MD_35	3785
pmDpchCodePwrSf32P5MD_36	3785
pmDpchCodePwrSf32P5MD_37	3785
pmDpchCodePwrSf4P5MD_00	3786
pmDpchCodePwrSf4P5MD_01	3786
pmDpchCodePwrSf4P5MD_02	3786
pmDpchCodePwrSf4P5MD_03	3787
pmDpchCodePwrSf4P5MD_04	3787
pmDpchCodePwrSf4P5MD_05	3788
pmDpchCodePwrSf4P5MD_06	3788
pmDpchCodePwrSf4P5MD_07	3788
pmDpchCodePwrSf4P5MD_08	3789
pmDpchCodePwrSf4P5MD_09	3789
pmDpchCodePwrSf4P5MD_10	3790
pmDpchCodePwrSf4P5MD_11	3790
pmDpchCodePwrSf4P5MD_12	3790
pmDpchCodePwrSf4P5MD_13	3791
pmDpchCodePwrSf4P5MD_14	3791
pmDpchCodePwrSf4P5MD_15	3791
pmDpchCodePwrSf4P5MD_16	3792
pmDpchCodePwrSf4P5MD_17	3792
pmDpchCodePwrSf4P5MD_18	3793
pmDpchCodePwrSf4P5MD_19	3793
pmDpchCodePwrSf4P5MD_20	3793
pmDpchCodePwrSf4P5MD_21	3794
pmDpchCodePwrSf4P5MD_22	3794
pmDpchCodePwrSf4P5MD_23	3795
pmDpchCodePwrSf4P5MD_24	3795

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpchCodePwrSf4P5MD_25	3795
pmDpchCodePwrSf4P5MD_26	3796
pmDpchCodePwrSf4P5MD_27	3796
pmDpchCodePwrSf4P5MD_28	3796
pmDpchCodePwrSf4P5MD_29	3797
pmDpchCodePwrSf4P5MD_30	3797
pmDpchCodePwrSf4P5MD_31	3798
pmDpchCodePwrSf4P5MD_32	3798
pmDpchCodePwrSf4P5MD_33	3798
pmDpchCodePwrSf4P5MD_34	3799
pmDpchCodePwrSf4P5MD_35	3799
pmDpchCodePwrSf4P5MD_36	3800
pmDpchCodePwrSf4P5MD_37	3800
pmDpchCodePwrSf64P5MD_00	3800
pmDpchCodePwrSf64P5MD_01	3801
pmDpchCodePwrSf64P5MD_02	3801
pmDpchCodePwrSf64P5MD_03	3801
pmDpchCodePwrSf64P5MD_04	3802
pmDpchCodePwrSf64P5MD_05	3802
pmDpchCodePwrSf64P5MD_06	3803
pmDpchCodePwrSf64P5MD_07	3803
pmDpchCodePwrSf64P5MD_08	3803
pmDpchCodePwrSf64P5MD_09	3804
pmDpchCodePwrSf64P5MD_10	3804
pmDpchCodePwrSf64P5MD_11	3805
pmDpchCodePwrSf64P5MD_12	3805
pmDpchCodePwrSf64P5MD_13	3805
pmDpchCodePwrSf64P5MD_14	3806
pmDpchCodePwrSf64P5MD_15	3806
pmDpchCodePwrSf64P5MD_16	3806
pmDpchCodePwrSf64P5MD_17	3807
pmDpchCodePwrSf64P5MD_18	3807
pmDpchCodePwrSf64P5MD_19	3808
pmDpchCodePwrSf64P5MD_20	3808
pmDpchCodePwrSf64P5MD_21	3808
pmDpchCodePwrSf64P5MD_22	3809
pmDpchCodePwrSf64P5MD_23	3809
pmDpchCodePwrSf64P5MD_24	3810
pmDpchCodePwrSf64P5MD_25	3810
pmDpchCodePwrSf64P5MD_26	3810
pmDpchCodePwrSf64P5MD_27	3811
pmDpchCodePwrSf64P5MD_28	3811
pmDpchCodePwrSf64P5MD_29	3811
pmDpchCodePwrSf64P5MD_30	3812
pmDpchCodePwrSf64P5MD_31	3812
pmDpchCodePwrSf64P5MD_32	3813
pmDpchCodePwrSf64P5MD_33	3813
pmDpchCodePwrSf64P5MD_34	3813
pmDpchCodePwrSf64P5MD_35	3814
pmDpchCodePwrSf64P5MD_36	3814
pmDpchCodePwrSf64P5MD_37	3815

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpdchBer_000	3815
pmDpdchBer_001	3815
pmDpdchBer_002	3816
pmDpdchBer_003	3816
pmDpdchBer_004	3816
pmDpdchBer_005	3817
pmDpdchBer_006	3817
pmDpdchBer_007	3817
pmDpdchBer_008	3818
pmDpdchBer_009	3818
pmDpdchBer_010	3818
pmDpdchBer_011	3819
pmDpdchBer_012	3819
pmDpdchBer_013	3819
pmDpdchBer_014	3820
pmDpdchBer_015	3820
pmDpdchBer_016	3820
pmDpdchBer_017	3821
pmDpdchBer_018	3821
pmDpdchBer_019	3821
pmDpdchBer_020	3822
pmDpdchBer_021	3822
pmDpdchBer_022	3822
pmDpdchBer_023	3823
pmDpdchBer_024	3823
pmDpdchBer_025	3823
pmDpdchBer_026	3824
pmDpdchBer_027	3824
pmDpdchBer_028	3824
pmDpdchBer_029	3825
pmDpdchBer_030	3825
pmDpdchBer_031	3825
pmDpdchBer_032	3826
pmDpdchBer_033	3826
pmDpdchBer_034	3826
pmDpdchBer_035	3827
pmDpdchBer_036	3827
pmDpdchBer_037	3827
pmDpdchBer_038	3828
pmDpdchBer_039	3828
pmDpdchBer_040	3828
pmDpdchBer_041	3829
pmDpdchBer_042	3829
pmDpdchBer_043	3829
pmDpdchBer_044	3830
pmDpdchBer_045	3830
pmDpdchBer_046	3830
pmDpdchBer_047	3831
pmDpdchBer_048	3831
pmDpdchBer_049	3831
pmDpdchBer_050	3832

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpdchBer_051	3832
pmDpdchBer_052	3832
pmDpdchBer_053	3833
pmDpdchBer_054	3833
pmDpdchBer_055	3833
pmDpdchBer_056	3834
pmDpdchBer_057	3834
pmDpdchBer_058	3834
pmDpdchBer_059	3835
pmDpdchBer_060	3835
pmDpdchBer_061	3835
pmDpdchBer_062	3836
pmDpdchBer_063	3836
pmDpdchBer_064	3836
pmDpdchBer_065	3837
pmDpdchBer_066	3837
pmDpdchBer_067	3837
pmDpdchBer_068	3838
pmDpdchBer_069	3838
pmDpdchBer_070	3838
pmDpdchBer_071	3839
pmDpdchBer_072	3839
pmDpdchBer_073	3839
pmDpdchBer_074	3840
pmDpdchBer_075	3840
pmDpdchBer_076	3840
pmDpdchBer_077	3841
pmDpdchBer_078	3841
pmDpdchBer_079	3841
pmDpdchBer_080	3842
pmDpdchBer_081	3842
pmDpdchBer_082	3842
pmDpdchBer_083	3843
pmDpdchBer_084	3843
pmDpdchBer_085	3843
pmDpdchBer_086	3844
pmDpdchBer_087	3844
pmDpdchBer_088	3844
pmDpdchBer_089	3845
pmDpdchBer_090	3845
pmDpdchBer_091	3845
pmDpdchBer_092	3846
pmDpdchBer_093	3846
pmDpdchBer_094	3846
pmDpdchBer_095	3847
pmDpdchBer_096	3847
pmDpdchBer_097	3847
pmDpdchBer_098	3848
pmDpdchBer_099	3848
pmDpdchBer_100	3848
pmDpdchBer_101	3849

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpdchBer_102	3849
pmDpdchBer_103	3849
pmDpdchBer_104	3850
pmDpdchBer_105	3850
pmDpdchBer_106	3850
pmDpdchBer_107	3851
pmDpdchBer_108	3851
pmDpdchBer_109	3851
pmDpdchBer_110	3852
pmDpdchBer_111	3852
pmDpdchBer_112	3852
pmDpdchBer_113	3853
pmDpdchBer_114	3853
pmDpdchBer_115	3853
pmDpdchBer_116	3854
pmDpdchBer_117	3854
pmDpdchBer_118	3854
pmDpdchBer_119	3855
pmDpdchBer_120	3855
pmDpdchBer_121	3855
pmDpdchBer_122	3856
pmDpdchBer_123	3856
pmDpdchBer_124	3856
pmDpdchBer_125	3857
pmDpdchBer_126	3857
pmDpdchBer_127	3857
pmDpdchBer_128	3858
pmDpdchBerP5MD_00	3858
pmDpdchBerP5MD_01	3858
pmDpdchBerP5MD_02	3859
pmDpdchBerP5MD_03	3859
pmDpdchBerP5MD_04	3859
pmDpdchBerP5MD_05	3860
pmDpdchBerP5MD_06	3860
pmDpdchBerP5MD_07	3861
pmDpdchBerP5MD_08	3861
pmDpdchBerP5MD_09	3861
pmDpdchBerP5MD_10	3862
pmDpdchBerP5MD_11	3862
pmDpdchBerP5MD_12	3862
pmDpdchBerP5MD_13	3863
pmDpdchBerP5MD_14	3863
pmDpdchBerP5MD_15	3864
pmDpdchBerP5MD_16	3864
pmDpdchBerP5MD_17	3864
pmDpdchBerP5MD_18	3865
pmDpdchBerP5MD_19	3865
pmDpdchBerP5MD_20	3866
pmDpdchBerP5MD_21	3866
pmDpdchBerP5MD_22	3866
pmDpdchBerP5MD_23	3867

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDpdchBerP5MD_24	3867
pmOutOfSynch_00	3867
pmOutOfSynch_01	3868
pmOutOfSynch_02	3868
pmOutOfSynch_03	3868
pmOutOfSynch_04	3869
pmOutOfSynch_05	3869
pmOutOfSynch_06	3869
pmOutOfSynch_07	3870
pmOutOfSynch_08	3870
pmOutOfSynch_09	3870
pmOutOfSynch_10	3871
pmOutOfSynch_11	3871
pmOutOfSynch_12	3871
pmOutOfSynch_13	3872
pmOutOfSynch_14	3872
pmOutOfSynch_15	3872
pmOutOfSynch_16	3873
pmOutOfSynch_17	3873
pmOutOfSynch_18	3873
pmOutOfSynch_19	3874
pmOutOfSynch_20	3874
pmOutOfSynch_21	3874
pmOutOfSynch_22	3875
pmOutOfSynch_23	3875
pmOutOfSynch_24	3875
pmOutOfSynch_25	3876
pmOutOfSynch_26	3876
pmOutOfSynch_27	3876
pmOutOfSynch_28	3877
pmOutOfSynch_29	3877
pmOutOfSynch_30	3877
pmOutOfSynch_31	3878
pmOutOfSynch_32	3878
pmOutOfSynch_33	3878
pmOutOfSynch_34	3879
pmOutOfSynch_35	3879
pmOutOfSynch_36	3879
pmOutOfSynch_37	3880
pmOutOfSynch_38	3880
pmOutOfSynch_39	3880
pmOutOfSynch_40	3881
pmOutOfSynch_41	3881
pmOutOfSynch_42	3881
pmOutOfSynch_43	3882
pmOutOfSynch_44	3882
pmOutOfSynch_45	3882
pmOutOfSynch_46	3883
pmOutOfSynch_47	3883
pmOutOfSynch_48	3883
pmOutOfSynch_49	3884

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRLSSupSynchToUnsynch	3884
pmRLSSupWaitToOutOfSynch	3884
pmUISynchTime_00	3885
pmUISynchTime_01	3885
pmUISynchTime_02	3885
pmUISynchTime_03	3886
pmUISynchTime_04	3886
pmUISynchTime_05	3886
pmUISynchTime_06	3887
pmUISynchTime_07	3887
pmUISynchTime_08	3887
pmUISynchTime_09	3888
pmUISynchTime_10	3888
pmUISynchTime_11	3888
pmUISynchTime_12	3889
pmUISynchTime_13	3889
pmUISynchTime_14	3889
pmUISynchTime_15	3890
pmUISynchTimeSHO_00	3890
pmUISynchTimeSHO_01	3890
pmUISynchTimeSHO_02	3891
pmUISynchTimeSHO_03	3891
pmUISynchTimeSHO_04	3891
pmUISynchTimeSHO_05	3892
pmUISynchTimeSHO_06	3892
pmUISynchTimeSHO_07	3892
pmUISynchTimeSHO_08	3893
pmUISynchTimeSHO_09	3893
pmUISynchTimeSHO_10	3893
pmUISynchTimeSHO_11	3894
pmUISynchTimeSHO_12	3894
pmUISynchTimeSHO_13	3894
pmUISynchTimeSHO_14	3895
pmUISynchTimeSHO_15	3895
Ranap Primitive Calculations	3895
GRAPHmultiLineSeparator	3896
NUMDAYS	3896
NUMHOURS	3896
Ranap Peg Counts	3896
PERLENSEC	3896
pmNnsfLoadDistributionRouted	3896
pmNnsfNriRouted	3897
RNC_RELEASE	3897
RNC	3897
RNC_SubNetwork_Region	3898
RNC Primitive Calculations	3898
Average_CS_Speech_Users_per_RNC	3898
Avr_PS_Interactive_Calls_DCH	3898
Avr_PS_Interactive_Calls_FACH	3898
CS_64_DL_Code_Utilization_per_RNC	3898

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CS_Speech_Downlink_Code_Utilization_per_RNC	3898
CS_Speech_Erlang_per_RNC	3899
DL_Payload_PS_Interactive_DCH	3899
DL_Payload_PS_Interactive_FACH	3899
GRAPHmultiLineSeparator	3899
Handover_Reduction_Factor_per_RNC	3899
k_PAYLOAD_DL_TOT	3899
k_PAYLOAD_UL_TOT	3900
k_RAB_EST_FAIL	3900
k_RAB_EST_FAIL_RATE	3900
k_RAB_REL_FAIL	3900
k_RAB_REL_FAIL_RATE	3900
MainProcessorLoadRNC	3900
NUMDAYS	3900
NUMHOURS	3901
PAYLOAD_CS_DL_MB	3901
PAYLOAD_CS_UL_MB	3901
PAYLOAD_PS_DL_MB	3901
PAYLOAD_PS_UL_MB	3901
PAYLOAD_TOT_DL_MB	3901
PAYLOAD_TOT_UL_MB	3902
pmDITrafficVolumeCs12_MB	3902
pmDITrafficVolumeCs12Ps0_MB	3902
pmDITrafficVolumeCs12Ps64_MB	3902
pmDITrafficVolumeCs57_MB	3902
pmDITrafficVolumeCs64_MB	3902
pmDITrafficVolumePs128_MB	3903
pmDITrafficVolumePs384_MB	3903
pmDITrafficVolumePs64_MB	3903
pmDITrafficVolumePsCommon_MB	3903
pmUITrafficVolumeCs12_MB	3903
pmUITrafficVolumeCs12Ps0_MB	3903
pmUITrafficVolumeCs12Ps64_MB	3904
pmUITrafficVolumeCs57_MB	3904
pmUITrafficVolumeCs64_MB	3904
pmUITrafficVolumePs128_MB	3904
pmUITrafficVolumePs384_MB	3904
pmUITrafficVolumePs64_MB	3904
pmUITrafficVolumePsCommon_MB	3905
POSITIONING_FAIL	3905
RAB_EST_ATT_CS57	3905
RAB_EST_ATT_CS64	3905
RAB_EST_ATT_PS128	3905
RAB_EST_ATT_PS384	3905
RAB_EST_ATT_PS64	3905
RAB_EST_ATT_PSCOMMON	3906
RAB_EST_ATT_SP_PS0	3906
RAB_EST_ATT_SP_PS64	3906
RAB_EST_ATT_SPEECH	3906
RAB_EST_FAIL_CS57	3906
RAB_EST_FAIL_CS64	3906

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RAB_EST_FAIL_PS128	3907
RAB_EST_FAIL_PS384	3907
RAB_EST_FAIL_PS64	3907
RAB_EST_FAIL_PSCOMMON	3907
RAB_EST_FAIL_SP_PS0	3907
RAB_EST_FAIL_SP_PS64	3907
RAB_EST_FAIL_SPEECH	3907
RAB_REL_ATT_CS57	3908
RAB_REL_ATT_CS64	3908
RAB_REL_ATT_PS128	3908
RAB_REL_ATT_PS384	3908
RAB_REL_ATT_PS64	3908
RAB_REL_ATT_PSCOMMON	3908
RAB_REL_ATT_SP_PS0	3908
RAB_REL_ATT_SP_PS64	3909
RAB_REL_ATT_SPEECH	3909
RAB_REL_FAIL_CS57	3909
RAB_REL_FAIL_CS64	3909
RAB_REL_FAIL_PS128	3909
RAB_REL_FAIL_PS384	3909
RAB_REL_FAIL_PS64	3910
RAB_REL_FAIL_PSCOMMON	3910
RAB_REL_FAIL_SP_PS0	3910
RAB_REL_FAIL_SP_PS64	3910
RAB_REL_FAIL_SPEECH	3910
RNCOutRelocationSuccessRate	3910
RNCRelocationSuccessRate	3910
SuccOutUMTSGSMHoRNCRate	3911
UL_Payload_PS_Interactive_DCH	3911
UL_Payload_PS_Interactive_RACH	3911
Uplink_CS_64_BLER	3911
Uplink_CS_Streaming_BLER	3911
Uplink_PS_Interactive_BLER	3911
Uplink_PS_Streaming_16_64_and_PS8_BLER	3912
Uplink_Speech_and_PS64_BLER	3912
Uplink_Speech_BLER	3912
RNC Peg Counts	3912
activeQueueMgmt	3912
adjustmentPeriod	3912
adjustmentRatio	3913
aliasPlmnIdentities	3913
allow384HsRab	3913
allowSwitchToCommon	3913
altitude	3914
amountOfReporting1a	3914
amountOfReporting1c	3914
asCellSyncInfoReplnd	3914
bandwidthMargin	3915
bandwidthMarginUI	3915
bcchModCycleLength	3915
betaPrachControlTf0	3915

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

betaPrachControlTf1	3916
betaPrachDataTf0	3916
betaPrachDataTf1	3916
blerCorrectionFactor	3916
cBackOff	3917
cchWaitCuT	3917
cCM	3917
cellListAtRemovalDelay	3917
ciphering	3918
cipheringGuardTime	3918
cNbifho	3918
cnDrxCycleLengthCs	3918
cnDrxCycleLengthPs	3919
cnhhoSupp	3919
cnInformation	3919
codePowerPeriod	3919
comprModeRetryInterv	3920
confidence	3920
counterAlarmCeaseLimit	3920
counterAlarmThreshold	3920
counterWarningAlarmCeaseLimit	3921
coverageTimer	3921
cPO	3921
ctrFileSize	3921
dchRcLostT	3922
deltaSir1	3922
deltaSir2	3922
deltaSirAfter1	3923
deltaSirAfter2	3923
dInitSirTarget	3923
dIPcMethod	3923
dIRlcBufUpswitch	3924
dIRlcBufUpswitchMrab	3924
dISfLimitTimer	3924
doStep	3924
downswitchPwrMargin	3925
downswitchThreshold	3925
downswitchTimer	3925
downswitchTimerSp	3925
downswitchTimerThreshold	3926
downswitchTimerUp	3926
dsCellSyncInfoRepInd	3926
dscpValuePsStreaming	3926
dto	3927
ecNoPcpichDefault	3927
elevationThreshold	3927
emergencyCallRedirect	3927
enabledPositioningFeatures	3928
fddGsmHOSupp	3928
fddIfhoSupp	3928
filterCoeff4_2b	3928

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

filterCoeff6	3929
filterCoefficient1	3929
filterCoefficient2	3929
filteringCoefficient	3929
fixedPowerDI	3930
fixedRefPower	3930
gainFactorCExtraHigh	3930
gainFactorCHigh	3930
gainFactorCLow	3931
gainFactorDExtraHigh	3931
gainFactorDHigh	3931
gainFactorDLow	3931
gpehDataLevel	3932
gpehFileSize	3932
gpehStorageSize	3932
gsmAmountPropRepeat	3932
gsmFilterCoefficient3	3933
gsmPropRepeatInterval	3933
gsmThresh3a	3933
gsmTimeDiffReplnd	3933
hoTypeDrmcBand1	3934
hoTypeDrmcBand10	3934
hoTypeDrmcBand11	3934
hoTypeDrmcBand12	3934
hoTypeDrmcBand13	3935
hoTypeDrmcBand14	3935
hoTypeDrmcBand15	3935
hoTypeDrmcBand16	3935
hoTypeDrmcBand17	3936
hoTypeDrmcBand2	3936
hoTypeDrmcBand3	3936
hoTypeDrmcBand4	3936
hoTypeDrmcBand5	3937
hoTypeDrmcBand6	3937
hoTypeDrmcBand7	3937
hoTypeDrmcBand8	3937
hoTypeDrmcBand9	3938
hsCellChangeAllowed	3938
hsCellChangeCfnOffset	3938
hsdschInactivityTimer	3938
hsDschRcLostT	3939
hsHysteresis1d	3939
hsMacdSwitchTimeOffset	3939
hsOnlyBestCell	3940
hsQualityEstimate	3940
hsTimeToTrigger1d	3940
hyst4_2b	3940
hysteresis1a	3941
hysteresis1b	3941
hysteresis1c	3941
hysteresis1d	3941

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

hysteresis2d	3942
hysteresis2f	3942
hysteresis3a	3942
hysteresisSiUpdate	3942
ifhoAmountPropRepeat	3943
ifhoPropRepeatInterval	3943
inactivityTimer	3943
inactivityTimerDch	3943
initialCellListDelay	3944
initShoPowerParam	3944
interFreqCnhhoPenaltyEcno	3944
interFreqCnhhoPenaltyRscp	3944
intraFreqCnhhoPenalty	3945
intraFreqCnhhoWeight	3945
itp	3945
loadSharingDirRetryEnabled	3946
loadSharingRrcEnabled	3946
loadSharingThreshold	3946
maxActiveSet	3946
maxAdjustmentStep	3947
maxBufferTime	3947
maxGsmMonSubset	3947
maxlefMonSubset	3947
maxNumberRepCells1a	3948
maxNumberRepCells1c	3948
maxNumberRepCells1d	3948
maxNumberRepCells3a	3948
maxNumbRepCells4_2b	3949
maxSohoListSubset	3949
mcc_CM	3949
measQuantity1	3949
mnc_CM	3950
mncLength	3950
msCellSyncInfoReplnd	3950
multiRabSp0Available	3951
multiRabUdi8Available	3951
n300	3951
n302	3951
n308	3952
n313	3952
n315	3952
netwResourceIdentifierLengthCs	3952
netwResourceIdentifierLengthPs	3953
nonUsedFreqThresh4_2bEcno	3953
nonUsedFreqThresh4_2bRscp	3953
nonUsedFreqW4_2b	3953
noOfCountersAllowed	3954
noOfMaxDrxCycles	3954
noOfMibValueTagRetrans	3954
noOfPagingRecordTransm	3954
packetEstMode	3955

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pcpichPowerDefault	3955
pendingTimeAfterTrigger	3955
PERLENSEC	3955
PERLENSEC_K	3956
pmCnInitPagingToldleUe	3956
pmCsCnDowntime	3956
pmIntegrityFailureRrcMsg	3957
pmMocnRedirections	3957
pmNoCchDiscardedDataFramesE	3957
pmNoCchDiscardedDataFramesL	3958
pmNoCchTimingAdjContrFrames	3958
pmNoDiscardSduDcch	3958
pmNoDiscardSduDtch	3959
pmNoInvalidRabEstablishAttempts	3959
pmNoInvalidRabReleaseAttempts	3959
pmNoluSigEstablishAttemptCs	3960
pmNoluSigEstablishAttemptPs	3960
pmNoluSigEstablishSuccessCs	3960
pmNoluSigEstablishSuccessPs	3961
pmNoOfPacketCallDuration1	3961
pmNoOfPacketCallDuration2	3961
pmNoOfPacketCallDuration3	3962
pmNoOfPacketCallDuration4	3962
pmNoOfPacketCallDurationHs1	3962
pmNoOfPacketCallDurationHs2	3963
pmNoOfPacketCallDurationHs3	3963
pmNoOfPacketCallDurationHs4	3963
pmNoOfRedirectedEmergencyCalls	3964
pmNoPageDiscardCmpLoadC	3964
pmNoRabEstablishFailureUeCapability	3964
pmNoReceivedSduDcch	3964
pmNoReceivedSduDtch	3965
pmNoReleaseCchWaitCuT	3965
pmNoReleaseDchRcLostT	3965
pmNoRetransPduDcch	3966
pmNoRetransPduDtch	3966
pmNoRlcErrors	3966
pmNoSbHoMeasStart	3967
pmNoSentPduDcch	3967
pmNoSentPduDtch	3967
pmNoSuccessSbHo	3967
pmPositioningReqAtt	3968
pmPositioningReqAttAgps	3968
pmPositioningReqAttCellId	3968
pmPositioningReqAttEsAgps	3969
pmPositioningReqAttEsCellId	3969
pmPositioningReqReAttCellId	3969
pmPositioningReqReAttEsCellId	3970
pmPositioningReqReAttSuccCellId	3970
pmPositioningReqSucc	3970
pmPositioningReqSuccAgps	3971

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmPositioningReqSuccAgpsQosSucc	3971
pmPositioningReqSuccCellId	3971
pmPositioningReqSuccCellIdQosSucc	3972
pmPositioningReqSuccEsAgps	3972
pmPositioningReqSuccEsAgpsQosSucc	3972
pmPositioningReqUnsuccAgpsAbort	3973
pmSamplesDchDchDIRcvDelay_0	3973
pmSamplesDchDchDIRcvDelay_1	3973
pmSamplesDchDchDIRcvDelay_2	3974
pmSamplesDchDchJitter	3974
pmSamplesDchDchLatency_0	3974
pmSamplesDchDchLatency_1	3975
pmSamplesDchDchLatency_2	3975
pmSamplesDchDIDelay_0	3975
pmSamplesDchDIDelay_1	3976
pmSamplesDchDIDelay_2	3976
pmSamplesHsDchDIRcvDelay_0	3976
pmSamplesHsDchDIRcvDelay_1	3977
pmSamplesHsDchDIRcvDelay_2	3977
pmSamplesHsDchJitter	3977
pmSamplesHsDchLatency_0	3978
pmSamplesHsDchLatency_1	3978
pmSamplesHsDchLatency_2	3978
pmSamplesHsDIDelay_0	3979
pmSamplesHsDIDelay_1	3979
pmSamplesHsDIDelay_2	3979
pmSamplesHsEuDIRcvDelay_0	3980
pmSamplesHsEuDIRcvDelay_1	3980
pmSamplesHsEuDIRcvDelay_2	3980
pmSamplesHsEuJitter	3981
pmSamplesHsEuLatency_0	3981
pmSamplesHsEuLatency_1	3981
pmSamplesHsEuLatency_2	3982
pmSentPacketData1	3982
pmSentPacketData2	3982
pmSentPacketData3	3983
pmSentPacketData4	3983
pmSentPacketDataHs1	3983
pmSentPacketDataHs2	3984
pmSentPacketDataHs3	3984
pmSentPacketDataHs4	3984
pmSentPacketDataInclRetrans1	3985
pmSentPacketDataInclRetrans2	3985
pmSentPacketDataInclRetrans3	3985
pmSentPacketDataInclRetrans4	3986
pmSentPacketDataInclRetransHs1	3986
pmSentPacketDataInclRetransHs2	3986
pmSentPacketDataInclRetransHs3	3987
pmSentPacketDataInclRetransHs4	3987
pmSumDchDchDIRcvDelay_0	3987
pmSumDchDchDIRcvDelay_1	3988

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumDchDchDIRcvDelay_2	3988
pmSumDchDchJitter	3988
pmSumDchDchLatency_0	3989
pmSumDchDchLatency_1	3989
pmSumDchDchLatency_2	3989
pmSumDchDIDelay_0	3990
pmSumDchDIDelay_1	3990
pmSumDchDIDelay_2	3990
pmSumHsDchDIRcvDelay_0	3991
pmSumHsDchDIRcvDelay_1	3991
pmSumHsDchDIRcvDelay_2	3991
pmSumHsDchJitter	3992
pmSumHsDchLatency_0	3992
pmSumHsDchLatency_1	3992
pmSumHsDchLatency_2	3993
pmSumHsDIDelay_0	3993
pmSumHsDIDelay_1	3993
pmSumHsDIDelay_2	3994
pmSumHsEulDIRcvDelay_0	3994
pmSumHsEulDIRcvDelay_1	3994
pmSumHsEulDIRcvDelay_2	3995
pmSumHsEulJitter	3995
pmSumHsEulLatency_0	3995
pmSumHsEulLatency_1	3996
pmSumHsEulLatency_2	3996
pmTotalPacketDuration1	3996
pmTotalPacketDuration2	3997
pmTotalPacketDuration3	3997
pmTotalPacketDuration4	3997
pmTotalPacketDurationHs1	3998
pmTotalPacketDurationHs2	3998
pmTotalPacketDurationHs3	3998
pmTotalPacketDurationHs4	3999
pmTotNoSbHo	3999
pO1	3999
pO2	3999
pO3	4000
polygonRadiusFactor	4000
psStreaming128	4000
psStreamingInactivityTimer	4000
pwrEstFact1	4001
pwrEstFact2	4001
pwrEstFact3	4001
readSfnInd	4001
recordingStorageSize	4002
releaseConnOffset	4002
repeatTimer	4002
reportHysteresis	4002
reportingInterval1a	4003
reportingInterval1c	4003
reportingRange1a	4003

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

reportingRange1b	4003
reportPeriodicity	4004
RNC_nesw	4004
RNC_RELEASE	4004
rnclId_CM	4004
rpp	4005
rtwpFilter	4005
selHoSup	4005
serviceBasedHoSupport	4005
sib11RepPeriod	4006
sib11StartPos	4006
sib12RepPeriod	4006
sib12StartPos	4007
sib1RepPeriod	4007
sib1StartPos	4007
sib3RepPeriod	4008
sib3StartPos	4008
sib5RepPeriod	4008
sib5StartPos	4009
sib7ExpirationTimeFactor	4009
sib7RepPeriod	4009
sib7StartPos	4009
sirErrorMode	4010
sirErrorReportHyst	4010
sirEstFilter	4010
sirIncreaseMask	4010
sirMax	4011
sirMin	4011
state128_128Supported	4011
t300	4011
t302	4012
t305	4012
t307	4012
t308	4012
t309	4013
t313	4013
t316	4013
t317	4013
tCellChange	4014
thpReportInterval	4014
timeReleaselUpS	4014
timeRelocoverall	4014
timeRelocprep	4015
timeRelocsup	4015
timeToTrigger1a	4015
timeToTrigger1b	4015
timeToTrigger1c	4016
timeToTrigger1d	4016
timeToTrigger2dEcno	4016
timeToTrigger2dRscp	4016
timeToTrigger2fEcno	4017

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

timeToTrigger2fRscp	4017
timeToTrigger3a	4017
timeTrigg4_2b	4018
timeTrigg6a	4018
timeTrigg6b	4018
tmStopGsmMeas	4018
toAE	4019
toAWE	4019
toAWS	4019
tProcRbsDI	4019
tProcRncDI	4020
transmittedCodePowerFilter	4020
triggerCondOne1b	4020
triggerCondTwo1a	4020
tsHolInIratHo	4021
uetrFileSize	4021
ueTxPowerThresh6a	4021
ueTxPowerThresh6b	4021
ulInitSirTargetExtraHigh	4022
ulInitSirTargetHigh	4022
ulInitSirTargetLow	4022
ulInitSirTargetSrb	4022
ulOuterLoopRegulator	4023
ulRlcBufUpswitch	4023
ulRlcBufUpswitchMrab	4023
ulSirGuard	4023
ulSirStep	4024
uncertaintyAltitude	4024
updateCellReattsNo	4024
upswitchPwrMargin	4024
upswitchTimer	4025
upswitchTimerUI	4025
usedFreqRelThresh2fEcno	4025
usedFreqRelThresh2fRscp	4025
usedFreqRelThresh4_2bEcno	4026
usedFreqRelThresh4_2bRscp	4026
usedFreqThresh2dEcnoDnc	4026
usedFreqThresh2dRscpDnc	4026
usedFreqW2d	4027
usedFreqW2f	4027
usedFreqW4_2b	4027
userLabel	4027
userLabel_CM	4028
utranFilterCoefficient3	4028
utranRelThresh3aEcno	4028
utranRelThresh3aRscp	4029
utranRelThreshRscp	4029
utranRnsConfidence	4029
utranRnsUncertaintyRadius	4029
utranW3a	4030
w1a	4030

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

w1b	4030
RNCModule Primitive Calculations	4030
GRAPHmultiLineSeparator	4030
NUMDAYS	4031
NUMHOURS	4031
RNCModule Peg Counts	4031
availabilityStatus	4031
operationalState	4031
PERLENSEC	4031
PERLENSEC_K	4032
reservedBy	4032
RNC_RELEASE	4032
rncModuleResourceId	4033
userLabel	4033
SccpAcctCriteria_NodeB Primitive Calculations	4033
GRAPHmultiLineSeparator	4033
NUMDAYS	4033
NUMHOURS	4034
SccpAcctCriteria_NodeB Peg Counts	4034
pmNoOfMsg	4034
pmNoOfOctets	4034
SccpAcctCriteria_RNC Primitive Calculations	4034
GRAPHmultiLineSeparator	4035
NUMDAYS	4035
NUMHOURS	4035
SccpAcctCriteria_RNC Peg Counts	4035
pmNoOfMsg	4035
pmNoOfOctets	4035
SccpAp_NodeB Primitive Calculations	4036
GRAPHmultiLineSeparator	4036
NUMDAYS	4036
NUMHOURS	4036
SccpAp_NodeB Peg Counts	4036
PERLENSEC	4036
PERLENSEC_K	4037
SccpAp_RNC Primitive Calculations	4037
GRAPHmultiLineSeparator	4037
NUMDAYS	4037
NUMHOURS	4037
SccpAp_RNC Peg Counts	4038
PERLENSEC	4038
PERLENSEC_K	4038
Sccpch Primitive Calculations	4038
GRAPHmultiLineSeparator	4038
NUMDAYS	4039
NUMHOURS	4039
Sccpch Peg Counts	4039
NodeB_RELEASE	4039
PERLENSEC	4039
PERLENSEC_K	4039

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfTfc1OnFach1	4040
pmNoOfTfc2OnFach1	4040
pmNoOfTfc3OnFach2	4040
SccpPolicing_NodeB Primitive Calculations	4041
GRAPHmultiLineSeparator	4041
NUMDAYS	4041
NUMHOURS	4041
SccpPolicing_NodeB Peg Counts	4041
pmNoOfRejectMsg	4041
SccpPolicing_RNC Primitive Calculations	4041
GRAPHmultiLineSeparator	4042
NUMDAYS	4042
NUMHOURS	4042
SccpPolicing_RNC Peg Counts	4042
pmNoOfRejectMsg	4042
SccpScrc_NodeB Primitive Calculations	4042
GRAPHmultiLineSeparator	4042
NUMDAYS	4043
NUMHOURS	4043
SccpScrc_NodeB Peg Counts	4043
PERLENSEC	4043
PERLENSEC_K	4043
pmNoOfConnectFailure	4044
pmNoOfHopCounterViolation	4044
pmNoOfRoutingFailNetworkCongest	4044
pmNoOfRoutingFailNoTransAddrOfSuchNature	4045
pmNoOfRoutingFailNoTransSpecificAddr	4045
pmNoOfRoutingFailReasonUnknown	4045
pmNoOfRoutingFailSubsysUnavail	4045
pmNoOfRoutingFailUnequippedSubsys	4046
pmNoOfRoutingFailure	4046
pmNoOfRoutingFailurePointCodeUnAvail	4046
SccpScrc_RNC Primitive Calculations	4047
GRAPHmultiLineSeparator	4047
NUMDAYS	4047
NUMHOURS	4047
SccpScrc_RNC Peg Counts	4047
PERLENSEC	4047
PERLENSEC_K	4048
pmNoOfConnectFailure	4048
pmNoOfHopCounterViolation	4048
pmNoOfRoutingFailNetworkCongest	4049
pmNoOfRoutingFailNoTransAddrOfSuchNature	4049
pmNoOfRoutingFailNoTransSpecificAddr	4049
pmNoOfRoutingFailReasonUnknown	4050
pmNoOfRoutingFailSubsysUnavail	4050
pmNoOfRoutingFailUnequippedSubsys	4050
pmNoOfRoutingFailure	4050
pmNoOfRoutingFailurePointCodeUnAvail	4051
SccpSp_NodeB Primitive Calculations	4051

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

GRAPHmultiLineSeparator	4051
NUMDAYS	4051
NUMHOURS	4051
SccpSp_NodeB Peg Counts	4052
PERLENSEC	4052
PERLENSEC_K	4052
pmNoOfConInUseExceedHighWaterMark	4052
pmNoOfConInUseReceeededLowWaterMark	4053
pmNoOfCREFRecFromNL	4053
pmNoOfCREFSentToNL	4053
pmNoOfCRRec	4054
pmNoOfCRSent	4054
pmNoOfDT1Rec	4054
pmNoOfDT1Sent	4055
pmNoOfERRRec	4055
pmNoOfERRSent	4055
pmNoOfRLSDRecFromNL	4055
pmNoOfRLSDSentToNL	4056
pmNoOfSubsysAllowedSent	4056
pmNoOfUDTRec	4056
pmNoOfUDTSent	4057
pmNoOfUDTSRec	4057
pmNoOfUDTSent	4057
pmNoOfXUDTRec	4058
pmNoOfXUDTSent	4058
pmNoOfXUDTSRec	4058
pmNoOfXUDTSent	4059
SccpSp_RNC Primitive Calculations	4059
GRAPHmultiLineSeparator	4059
NUMDAYS	4059
NUMHOURS	4059
SccpSp_RNC Peg Counts	4059
PERLENSEC	4059
PERLENSEC_K	4060
pmNoOfConInUseExceedHighWaterMark	4060
pmNoOfConInUseReceeededLowWaterMark	4060
pmNoOfCREFRecFromNL	4061
pmNoOfCREFSentToNL	4061
pmNoOfCRRec	4061
pmNoOfCRSent	4062
pmNoOfDT1Rec	4062
pmNoOfDT1Sent	4062
pmNoOfERRRec	4063
pmNoOfERRSent	4063
pmNoOfRLSDRecFromNL	4063
pmNoOfRLSDSentToNL	4064
pmNoOfSubsysAllowedSent	4064
pmNoOfUDTRec	4064
pmNoOfUDTSent	4064
pmNoOfUDTSRec	4065

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfUDTSSent	4065
pmNoOfXUDTRec	4065
pmNoOfXUDTSent	4066
pmNoOfXUDTSRec	4066
pmNoOfXUDTSSent	4066
Sctp_NodeB Primitive Calculations	4067
GRAPHmultiLineSeparator	4067
NUMDAYS	4067
NUMHOURS	4067
Sent_SCTP_data_chunks	4067
Sctp_NodeB Peg Counts	4067
pmSctpAborted	4067
pmSctpActiveEstab	4068
pmSctpCurrEstab	4068
pmSctpPassiveEstab	4068
pmSctpShutdowns	4069
pmSctpStatAssocOutOfBlue	4069
pmSctpStatChecksumErrorCounter	4069
pmSctpStatCommResume	4070
pmSctpStatCommStop	4070
pmSctpStatFragmentedUserMsg	4070
pmSctpStatOutOfOrderRecChunks	4071
pmSctpStatOutOfOrderSendChunks	4071
pmSctpStatReassembledUserMsg	4071
pmSctpStatRecChunks	4072
pmSctpStatRecChunksDropped	4072
pmSctpStatReceivedControlChunks	4072
pmSctpStatReceivedPackages	4073
pmSctpStatRetransChunks	4073
pmSctpStatSentChunks	4073
pmSctpStatSentChunksDropped	4074
pmSctpStatSentControlChunks	4074
pmSctpStatSentPackages	4074
Sctp_RNC Primitive Calculations	4075
GRAPHmultiLineSeparator	4075
NUMDAYS	4075
NUMHOURS	4075
Sent_SCTP_data_chunks	4075
Sctp_RNC Peg Counts	4075
pmSctpAborted	4075
pmSctpActiveEstab	4076
pmSctpCurrEstab	4076
pmSctpPassiveEstab	4076
pmSctpShutdowns	4077
pmSctpStatAssocOutOfBlue	4077
pmSctpStatChecksumErrorCounter	4077
pmSctpStatCommResume	4078
pmSctpStatCommStop	4078
pmSctpStatFragmentedUserMsg	4078
pmSctpStatOutOfOrderRecChunks	4079

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSctpStatOutOfOrderSendChunks	4079
pmSctpStatReassembledUserMsg	4079
pmSctpStatRecChunks	4080
pmSctpStatRecChunksDropped	4080
pmSctpStatReceivedControlChunks	4080
pmSctpStatReceivedPackages	4081
pmSctpStatRetransChunks	4081
pmSctpStatSentChunks	4081
pmSctpStatSentChunksDropped	4082
pmSctpStatSentControlChunks	4082
pmSctpStatSentPackages	4082
Sector Primitive Calculations	4083
GRAPHmultiLineSeparator	4083
NUMDAYS	4083
NUMHOURS	4083
Service Primitive Calculations	4083
GRAPHmultiLineSeparator	4083
NUMDAYS	4083
NUMHOURS	4083
Slot_NodeB Primitive Calculations	4084
GRAPHmultiLineSeparator	4084
NUMDAYS	4084
NUMHOURS	4084
Slot_RNC Primitive Calculations	4084
GRAPHmultiLineSeparator	4084
MainProcessorLoadRNC_Slot	4084
NUMDAYS	4085
NUMHOURS	4085
SpbDeviceGroup_NodeB Primitive Calculations	4085
GRAPHmultiLineSeparator	4085
NUMDAYS	4085
NUMHOURS	4085
SpbDeviceGroup_NodeB Peg Counts	4085
NodeB_RELEASE	4085
PERLENSEC	4086
PERLENSEC_K	4086
SpbDeviceGroup_RNC Primitive Calculations	4086
GRAPHmultiLineSeparator	4086
NUMDAYS	4087
NUMHOURS	4087
SpbDeviceGroup_RNC Peg Counts	4087
PERLENSEC	4087
PERLENSEC_K	4087
RNC_RELEASE	4088
SpbDeviceSet_NodeB Primitive Calculations	4088
GRAPHmultiLineSeparator	4088
NUMDAYS	4088
NUMHOURS	4088
SpbDeviceSet_NodeB Peg Counts	4088
NodeB_RELEASE	4088

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC	4089
PERLENSEC_K	4089
SpbDeviceSet_RNC Primitive Calculations	4089
GRAPHmultiLineSeparator	4089
NUMDAYS	4090
NUMHOURS	4090
SpbDeviceSet_RNC Peg Counts	4090
PERLENSEC	4090
PERLENSEC_K	4090
RNC_RELEASE	4091
SpDevicePool Primitive Calculations	4091
GRAPHmultiLineSeparator	4091
NUMDAYS	4091
NUMHOURS	4091
Sts1SpeTtp_NodeB Primitive Calculations	4091
GRAPHmultiLineSeparator	4091
NUMDAYS	4092
NUMHOURS	4092
Sts1SpeTtp_NodeB Peg Counts	4092
NodeB_RELEASE	4092
PERLENSEC	4092
PERLENSEC_K	4092
pmEsp	4093
pmSesp	4093
pmUasp	4093
Sts1SpeTtp_RNC Primitive Calculations	4094
GRAPHmultiLineSeparator	4094
NUMDAYS	4094
NUMHOURS	4094
Sts1SpeTtp_RNC Peg Counts	4094
PERLENSEC	4094
PERLENSEC_K	4095
pmEsp	4095
pmSesp	4095
pmUasp	4096
RNC_RELEASE	4096
Sts3CspeTtp_NodeB Primitive Calculations	4096
GRAPHmultiLineSeparator	4096
NUMDAYS	4096
NUMHOURS	4097
Sts3CspeTtp_NodeB Peg Counts	4097
NodeB_RELEASE	4097
PERLENSEC	4097
PERLENSEC_K	4097
pmEsp	4098
pmSesp	4098
pmUasp	4098
Sts3CspeTtp_RNC Primitive Calculations	4099
GRAPHmultiLineSeparator	4099
NUMDAYS	4099

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	4099
Sts3CspeTtp_RNC Peg Counts	4099
PERLENSEC	4099
PERLENSEC_K	4100
pmEsp	4100
pmSesp	4100
pmUasp	4100
RNC_RELEASE	4101
Subrack_NodeB Primitive Calculations	4101
GRAPHmultiLineSeparator	4101
NUMDAYS	4101
NUMHOURS	4101
Subrack_RNC Primitive Calculations	4102
GRAPHmultiLineSeparator	4102
MainProcessorLoadRNC_Subrack	4102
NUMDAYS	4102
NUMHOURS	4102
System Primitive Calculations	4102
GRAPHmultiLineSeparator	4102
NUMDAYS	4103
NUMHOURS	4103
T1Ttp_NodeB Primitive Calculations	4103
GRAPHmultiLineSeparator	4103
NUMDAYS	4103
NUMHOURS	4103
T1Ttp_NodeB Peg Counts	4103
NodeB_RELEASE	4103
PERLENSEC	4104
PERLENSEC_K	4104
pmEs	4104
pmSes	4105
pmUas	4105
T1Ttp_RNC Primitive Calculations	4105
GRAPHmultiLineSeparator	4105
NUMDAYS	4106
NUMHOURS	4106
T1Ttp_RNC Peg Counts	4106
PERLENSEC	4106
PERLENSEC_K	4106
pmEs	4106
pmSes	4107
pmUas	4107
RNC_RELEASE	4107
T3PhysPathTerm_NodeB Primitive Calculations	4108
GRAPHmultiLineSeparator	4108
NUMDAYS	4108
NUMHOURS	4108
T3PhysPathTerm_NodeB Peg Counts	4108
NodeB_RELEASE	4108
PERLENSEC	4109

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmEs	4109
pmEsCpp	4109
pmSes	4110
pmSesCpp	4110
pmUas	4110
T3PhysPathTerm_RNC Primitive Calculations	4111
GRAPHmultiLineSeparator	4111
NUMDAYS	4111
NUMHOURS	4111
T3PhysPathTerm_RNC Peg Counts	4111
PERLENSEC	4111
pmEs	4111
pmEsCpp	4112
pmSes	4112
pmSesCpp	4112
pmUas	4113
RNC_RELEASE	4113
ToneSenderService Primitive Calculations	4113
GRAPHmultiLineSeparator	4113
NUMDAYS	4114
NUMHOURS	4114
p_Seizures_Sucess_Rate	4114
ToneSenderService Peg Counts	4114
PERLENSEC	4114
RNC_RELEASE	4114
TransportNetw_NodeB Primitive Calculations	4115
GRAPHmultiLineSeparator	4115
NUMDAYS	4115
NUMHOURS	4115
TransportNetw_NodeB Peg Counts	4115
PERLENSEC	4115
PERLENSEC_K	4116
pmHDelayVarBest10Pct	4116
pmHDelayVarBest1Pct	4116
pmHDelayVarBest50Pct	4117
pmMaxDelayVariation	4117
TransportNetw_RNC Primitive Calculations	4117
GRAPHmultiLineSeparator	4117
NUMDAYS	4118
NUMHOURS	4118
TransportNetw_RNC Peg Counts	4118
PERLENSEC	4118
PERLENSEC_K	4118
pmHDelayVarBest10Pct	4119
pmHDelayVarBest1Pct	4119
pmHDelayVarBest50Pct	4119
pmMaxDelayVariation	4120
TsService Primitive Calculations	4120
GRAPHmultiLineSeparator	4120
NUMDAYS	4120

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

NUMHOURS	4120
p_Seizures_Sucess_Rate	4121
TsService Peg Counts	4121
PERLENSEC	4121
RNC_RELEASE	4121
UniSaalTp_NodeB Primitive Calculations	4121
GRAPHmultiLineSeparator	4122
NUMDAYS	4122
NUMHOURS	4122
UniSaalTp_NodeB Peg Counts	4122
NodeB_RELEASE	4122
PERLENSEC	4122
PERLENSEC_K	4123
pmLinkInServiceTime	4123
pmNoOfAllSLFailures	4123
pmNoOfLocalCongestions	4124
pmNoOfNoResponses	4124
pmNoOfOtherErrors	4124
pmNoOfProtocolErrors	4125
pmNoOfReceivedSDUs	4125
pmNoOfRemoteCongestions	4125
pmNoOfSentSDUs	4125
pmNoOfSequenceDataLosses	4126
pmNoOfUnsuccReTransmissions	4126
UniSaalTp_RNC Primitive Calculations	4126
GRAPHmultiLineSeparator	4126
NUMDAYS	4127
NUMHOURS	4127
UniSaalTp_RNC Peg Counts	4127
PERLENSEC	4127
PERLENSEC_K	4127
pmLinkInServiceTime	4128
pmNoOfAllSLFailures	4128
pmNoOfLocalCongestions	4128
pmNoOfNoResponses	4129
pmNoOfOtherErrors	4129
pmNoOfProtocolErrors	4129
pmNoOfReceivedSDUs	4129
pmNoOfRemoteCongestions	4130
pmNoOfSentSDUs	4130
pmNoOfSequenceDataLosses	4130
pmNoOfUnsuccReTransmissions	4131
RNC_RELEASE	4131
UplinkBaseBandPool Primitive Calculations	4131
GRAPHmultiLineSeparator	4131
k_CE_UL_CONG	4131
NUMDAYS	4132
NUMHOURS	4132
UplinkBaseBandPool Peg Counts	4132
NodeB_RELEASE	4132

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC	4132
PERLENSEC_K	4133
pmApomcOfRachCap	4133
pmApomcOfRakeRecUsed	4133
pmApomcOfUILinkCap	4134
pmHwCePoolEul_00	4134
pmHwCePoolEul_01	4134
pmHwCePoolEul_02	4135
pmHwCePoolEul_03	4135
pmHwCePoolEul_04	4135
pmHwCePoolEul_05	4136
pmHwCePoolEul_06	4136
pmHwCePoolEul_07	4136
pmHwCePoolEul_08	4137
pmHwCePoolEul_09	4137
pmHwCePoolEul_10	4137
pmHwCePoolEul_11	4138
pmHwCePoolEul_12	4138
pmHwCePoolEul_13	4138
pmHwCePoolEul_14	4139
pmHwCePoolEul_15	4139
pmHwCePoolEul_16	4139
pmHwCePoolEul_17	4140
pmHwCePoolEul_18	4140
pmHwCePoolEul_19	4140
pmHwCePoolEul_20	4141
pmHwCePoolEul_21	4141
pmHwCePoolEul_22	4141
pmHwCePoolEul_23	4142
pmHwCePoolEul_24	4142
pmHwCePoolEul_25	4142
pmHwCePoolEul_26	4143
pmHwCePoolEul_27	4143
pmHwCePoolEul_28	4143
pmHwCePoolEul_29	4144
pmHwCePoolEul_30	4144
pmHwCePoolEul_31	4144
pmHwCePoolEul_32	4145
pmHwCePoolEul_33	4145
pmHwCePoolEul_34	4145
pmHwCePoolEul_35	4146
pmHwCePoolEul_36	4146
pmHwCePoolEul_37	4146
pmHwCePoolEul_38	4147
pmHwCePoolEul_39	4147
pmHwCePoolEul_40	4147
pmHwCePoolEul_41	4148
pmHwCePoolEul_42	4148
pmHwCePoolEul_43	4148
pmHwCePoolEul_44	4149
pmHwCePoolEul_45	4149

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmHwCePoolEul_46	4149
pmHwCePoolEul_47	4150
pmHwCePoolEul_48	4150
pmHwCePoolEul_49	4150
pmHwCePoolEul_50	4151
pmHwCePoolEul_51	4151
pmHwCePoolEul_52	4151
pmHwCePoolEul_53	4152
pmHwCePoolEul_54	4152
pmHwCePoolEul_55	4152
pmNoOfIbho	4153
pmNoOfRadioLinksSf128_00	4153
pmNoOfRadioLinksSf128_01	4153
pmNoOfRadioLinksSf128_02	4154
pmNoOfRadioLinksSf128_03	4154
pmNoOfRadioLinksSf128_04	4154
pmNoOfRadioLinksSf128_05	4154
pmNoOfRadioLinksSf128_06	4155
pmNoOfRadioLinksSf128_07	4155
pmNoOfRadioLinksSf128_08	4155
pmNoOfRadioLinksSf128_09	4156
pmNoOfRadioLinksSf128_10	4156
pmNoOfRadioLinksSf128_11	4156
pmNoOfRadioLinksSf128_12	4157
pmNoOfRadioLinksSf128_13	4157
pmNoOfRadioLinksSf128_14	4157
pmNoOfRadioLinksSf16_00	4158
pmNoOfRadioLinksSf16_01	4158
pmNoOfRadioLinksSf16_02	4158
pmNoOfRadioLinksSf16_03	4158
pmNoOfRadioLinksSf16_04	4159
pmNoOfRadioLinksSf16_05	4159
pmNoOfRadioLinksSf16_06	4159
pmNoOfRadioLinksSf16_07	4160
pmNoOfRadioLinksSf16_08	4160
pmNoOfRadioLinksSf16_09	4160
pmNoOfRadioLinksSf16_10	4161
pmNoOfRadioLinksSf16_11	4161
pmNoOfRadioLinksSf16_12	4161
pmNoOfRadioLinksSf16_13	4162
pmNoOfRadioLinksSf16_14	4162
pmNoOfRadioLinksSf256_00	4162
pmNoOfRadioLinksSf256_01	4162
pmNoOfRadioLinksSf256_02	4163
pmNoOfRadioLinksSf256_03	4163
pmNoOfRadioLinksSf256_04	4163
pmNoOfRadioLinksSf256_05	4164
pmNoOfRadioLinksSf256_06	4164
pmNoOfRadioLinksSf256_07	4164
pmNoOfRadioLinksSf256_08	4165
pmNoOfRadioLinksSf256_09	4165

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfRadioLinksSf256_10	4165
pmNoOfRadioLinksSf256_11	4166
pmNoOfRadioLinksSf256_12	4166
pmNoOfRadioLinksSf256_13	4166
pmNoOfRadioLinksSf256_14	4166
pmNoOfRadioLinksSf32_00	4167
pmNoOfRadioLinksSf32_01	4167
pmNoOfRadioLinksSf32_02	4167
pmNoOfRadioLinksSf32_03	4168
pmNoOfRadioLinksSf32_04	4168
pmNoOfRadioLinksSf32_05	4168
pmNoOfRadioLinksSf32_06	4169
pmNoOfRadioLinksSf32_07	4169
pmNoOfRadioLinksSf32_08	4169
pmNoOfRadioLinksSf32_09	4170
pmNoOfRadioLinksSf32_10	4170
pmNoOfRadioLinksSf32_11	4170
pmNoOfRadioLinksSf32_12	4170
pmNoOfRadioLinksSf32_13	4171
pmNoOfRadioLinksSf32_14	4171
pmNoOfRadioLinksSf4_00	4171
pmNoOfRadioLinksSf4_01	4172
pmNoOfRadioLinksSf4_02	4172
pmNoOfRadioLinksSf4_03	4172
pmNoOfRadioLinksSf4_04	4173
pmNoOfRadioLinksSf4_05	4173
pmNoOfRadioLinksSf4_06	4173
pmNoOfRadioLinksSf4_07	4174
pmNoOfRadioLinksSf4_08	4174
pmNoOfRadioLinksSf4_09	4174
pmNoOfRadioLinksSf4_10	4174
pmNoOfRadioLinksSf4_11	4175
pmNoOfRadioLinksSf4_12	4175
pmNoOfRadioLinksSf4_13	4175
pmNoOfRadioLinksSf4_14	4176
pmNoOfRadioLinksSf64_00	4176
pmNoOfRadioLinksSf64_01	4176
pmNoOfRadioLinksSf64_02	4177
pmNoOfRadioLinksSf64_03	4177
pmNoOfRadioLinksSf64_04	4177
pmNoOfRadioLinksSf64_05	4178
pmNoOfRadioLinksSf64_06	4178
pmNoOfRadioLinksSf64_07	4178
pmNoOfRadioLinksSf64_08	4178
pmNoOfRadioLinksSf64_09	4179
pmNoOfRadioLinksSf64_10	4179
pmNoOfRadioLinksSf64_11	4179
pmNoOfRadioLinksSf64_12	4180
pmNoOfRadioLinksSf64_13	4180
pmNoOfRadioLinksSf64_14	4180
pmNoOfRadioLinksSf8_00	4181

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfRadioLinksSf8_01	4181
pmNoOfRadioLinksSf8_02	4181
pmNoOfRadioLinksSf8_03	4182
pmNoOfRadioLinksSf8_04	4182
pmNoOfRadioLinksSf8_05	4182
pmNoOfRadioLinksSf8_06	4182
pmNoOfRadioLinksSf8_07	4183
pmNoOfRadioLinksSf8_08	4183
pmNoOfRadioLinksSf8_09	4183
pmNoOfRadioLinksSf8_10	4184
pmNoOfRadioLinksSf8_11	4184
pmNoOfRadioLinksSf8_12	4184
pmNoOfRadioLinksSf8_13	4185
pmNoOfRadioLinksSf8_14	4185
pmNoUIHwLimitEul	4185
pmSetupAttemptsSf128	4186
pmSetupAttemptsSf16	4186
pmSetupAttemptsSf256	4186
pmSetupAttemptsSf32	4187
pmSetupAttemptsSf4	4187
pmSetupAttemptsSf64	4187
pmSetupAttemptsSf8	4187
pmSetupFailuresSf128	4188
pmSetupFailuresSf16	4188
pmSetupFailuresSf256	4188
pmSetupFailuresSf32	4189
pmSetupFailuresSf4	4189
pmSetupFailuresSf64	4189
pmSetupFailuresSf8	4190
pmUIActPeakCapUsage	4190
UpMfhService Primitive Calculations	4190
GRAPHmultiLineSeparator	4190
NUMDAYS	4190
NUMHOURS	4191
p_Seizures_Sucess_Rate	4191
UpMfhService Peg Counts	4191
PERLENSEC	4191
RNC_RELEASE	4191
Ura Primitive Calculations	4192
GRAPHmultiLineSeparator	4192
NUMDAYS	4192
NUMHOURS	4192
Ura Peg Counts	4192
PERLENSEC	4192
PERLENSEC_K	4192
pmCnInitPagingToUraUe	4193
pmSamplesRabUra	4193
pmSumRabUra	4193
pmUtranInitPagingToUraUe	4194
UtranCell Primitive Calculations	4194

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

AveCs12Ps0RabEstablish	4194
AveCs12Ps64RabEstablish	4194
AveCs12RabEstablish	4194
AveCs57RabEstablish	4195
AveCs64RabEstablish	4195
AvePs128RabEstablish	4195
AvePs384RabEstablish	4195
AvePs64RabEstablish	4195
Average_CS_Speech_Users_per_Cell	4195
AverageBestCs12Establish	4195
AveRrcOnlyEstablish	4196
Cell_Availability	4196
Cell_Availability_Excluding_Planned_Downtime	4196
Cell_Availability_UnPlanned_Downtime	4196
Cell_Unavailability_due_Planned_Down_Time	4196
CELL_UPD_FAIL	4196
CH_SW_DCH_DCH_FAIL	4197
CH_SW_FACH_DCH_FAIL	4197
CS_64_57_Accessibility_Grade_of_Service	4197
CS_64_DL_Code_Utilization	4197
CS_Call_Completion_Succ_Rate_retry_Excluded	4197
CS_Call_Completion_Succ_Rate_retry_Included	4197
CS_Retain_Speech_Drop_Rate	4198
CS_Speech_Accessibility_Directed_retry_Excluded	4198
CS_Speech_Accessibility_Directed_retry_Included	4198
CS_Speech_Downlink_Code_Utilization	4198
CS_Speech_Downlink_Code_Utilization_per_Cell	4198
CS_Speech_Drop_Rate	4199
CS_Speech_Erlang	4199
CS_Speech_Grade_of_Service	4199
CS_Speech_Grade_of_Service_RRC_Blocking	4199
CS_Speech_Retainability	4199
CS57_Accessibility	4199
CS57_Call_Completion_Succ_Rate	4200
CS57_Drop_Rate	4200
CS57_Retainability	4200
CS64_Accessibility	4200
CS64_Call_Completion_Succ_Rate	4200
CS64_Drop_Rate	4200
CS64_Retainability	4200
GRAPHmultiLineSeparator	4201
GSM_CELL_CHANGE_IN_FAIL	4201
GSM_CELL_CHANGE_OUT_FAIL	4201
GSM_HO_IN_FAIL	4201
GSM_HO_OUT_FAIL	4201
Handover_Reduction_Factor	4201
k_CARR_PWR_DL_AVE	4202
k_CONG_CSD	4202
k_CONG_PSD	4202
k_CONG_SPEECH	4202
k_DL_KB_PER_DROP	4202

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

k_RAB_PER_FACH	4202
k_RRC_ABNORM_DISCONN	4203
k_RRC_ABNORM_DISCONN_CS64	4203
k_RRC_ABNORM_DISCONN_PS	4203
k_RRC_ABNORM_DISCONN_RATE	4203
k_RRC_ABNORM_DISCONN_SPEECH	4203
k_RRC_ABNORM_DISCONN_STREAM	4203
k_RRC_CONN_FAIL	4204
k_RRC_CONN_FAIL_CS	4204
k_RRC_CONN_FAIL_PS	4204
k_RRC_CONN_FAIL_RATE	4204
k_SHO_AVE_ACT_SET	4204
k_SHO_AVE_ACT_SET_P2_1	4204
k_SHO_LEG_ADD_FAIL	4205
k_SHO_RATIO	4205
k_SHO_RATIO_P2_1	4205
NUMDAYS	4205
NUMHOURS	4206
p_ActDIRIcTotPacketThp	4206
p_ActDIRIcUserPacketThp	4206
p_ActUIRiCtotPacketThp	4206
p_ActUIRiCUserPacketThp	4206
PAYLOAD_CS_DL_MB	4206
PAYLOAD_CS_UL_MB	4207
PAYLOAD_PS_DL_MB	4207
PAYLOAD_PS_UL_MB	4207
PAYLOAD_TOT_DL_MB	4207
PAYLOAD_TOT_UL_MB	4207
pmAverageCompMode	4208
pmDIRIcUserPacketThpP5MD_00	4208
pmDIRIcUserPacketThpP5MD_01	4208
pmDIRIcUserPacketThpP5MD_02	4208
pmDIRIcUserPacketThpP5MD_03	4208
pmDIRIcUserPacketThpP5MD_04	4209
pmDIRIcUserPacketThpP5MD_05	4209
pmDIRIcUserPacketThpP5MD_06	4209
pmDIRIcUserPacketThpP5MD_07	4209
pmDIRIcUserPacketThpP5MD_08	4209
pmDIRIcUserPacketThpP5MD_09	4210
pmDIRIcUserPacketThpP5MD_10	4210
pmDIRIcUserPacketThpP5MD_11	4210
pmDIRIcUserPacketThpP5MD_12	4210
pmDIRIcUserPacketThpP5MD_13	4210
pmDIRIcUserPacketThpP5MD_14	4211
pmDIRIcUserPacketThpP5MD_15	4211
pmDIRIcUserPacketThpP5MD_16	4211
pmDIRIcUserPacketThpP5MD_17	4211
pmDIRIcUserPacketThpP5MD_18	4211
pmDIRIcUserPacketThpP5MD_19	4212
pmDIRIcUserPacketThpP5MD_20	4212
pmDIRIcUserPacketThpP5MD_21	4212

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDIRlcUserPacketThpP5MD_22	4212
pmDIRlcUserPacketThpP5MD_23	4212
pmDIRlcUserPacketThpP5MD_24	4213
pmDIRlcUserPacketThpP5MD_25	4213
pmDIRlcUserPacketThpP5MD_26	4213
pmDIRlcUserPacketThpP5MD_27	4213
pmDIRlcUserPacketThpP5MD_28	4213
pmDIRlcUserPacketThpP5MD_29	4214
pmDIRlcUserPacketThpP5MD_30	4214
pmDIRlcUserPacketThpP5MD_31	4214
pmDIRlcUserPacketThpP5MD_32	4214
pmDIRlcUserPacketThpP5MD_33	4214
pmDIRlcUserPacketThpP5MD_34	4215
pmDITrafficVolumeCs12_MB	4215
pmDITrafficVolumeCs12Ps0_MB	4215
pmDITrafficVolumeCs12Ps64_MB	4215
pmDITrafficVolumeCs57_MB	4215
pmDITrafficVolumeCs64_MB	4215
pmDITrafficVolumePs128_MB	4216
pmDITrafficVolumePs384_MB	4216
pmDITrafficVolumePs64_MB	4216
pmDITrafficVolumePsCommon_MB	4216
pmNoInCslratHoSuccess_GsmRel	4216
pmNoOutIratCcAtt	4216
pmNoOutIratCcReturnOldCh	4217
pmNoOutIratHoAtt	4217
pmNoOutIratHoResourceAllocFail	4217
pmNoOutIratHoReturnOldChOther	4217
pmNoOutIratHoReturnOldChPhyChFail	4217
pmNoOutIratHoSuccess	4217
pmUIRlcUserPacketThpP5MD_00	4218
pmUIRlcUserPacketThpP5MD_01	4218
pmUIRlcUserPacketThpP5MD_02	4218
pmUIRlcUserPacketThpP5MD_03	4218
pmUIRlcUserPacketThpP5MD_04	4218
pmUIRlcUserPacketThpP5MD_05	4219
pmUIRlcUserPacketThpP5MD_06	4219
pmUIRlcUserPacketThpP5MD_07	4219
pmUIRlcUserPacketThpP5MD_08	4219
pmUIRlcUserPacketThpP5MD_09	4219
pmUIRlcUserPacketThpP5MD_10	4220
pmUIRlcUserPacketThpP5MD_11	4220
pmUIRlcUserPacketThpP5MD_12	4220
pmUIRlcUserPacketThpP5MD_13	4220
pmUIRlcUserPacketThpP5MD_14	4220
pmUIRlcUserPacketThpP5MD_15	4221
pmUIRlcUserPacketThpP5MD_16	4221
pmUIRlcUserPacketThpP5MD_17	4221
pmUIRlcUserPacketThpP5MD_18	4221
pmUITrafficVolumeCs12_MB	4221
pmUITrafficVolumeCs12Ps0_MB	4221

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUITrafficVolumeCs12Ps64_MB	4222
pmUITrafficVolumeCs57_MB	4222
pmUITrafficVolumeCs64_MB	4222
pmUITrafficVolumePs128_MB	4222
pmUITrafficVolumePs384_MB	4222
pmUITrafficVolumePs64_MB	4222
pmUITrafficVolumePsCommon_MB	4223
PS_interact_Accessibility_Grade_of_Service	4223
PS_interactive_Call_Completion_Rate	4223
PS_interactive_Drop_Rate	4223
PS_interactive_Retainability	4223
PS_Interact_Accessibility	4223
PS_Stream_Accessibility	4224
PS_Stream_Call_Completion_Success_Rate	4224
PS_Stream_Drop_Rate	4224
PS_Stream_Retainability	4224
PS_Streaming_Accessibility_Grade_of_Service	4224
RefReqAllFRate	4224
ReturningRrcConnRate	4225
UtranCell Peg Counts	4225
accessClassNBarred	4225
ActDIRlcTotPacketThp_Preloaded	4225
ActDIRlcUserPacketThp_Preloaded	4225
ActUIRlcTotPacketThp_Preloaded	4226
ActUIRlcUserPacketThp_Preloaded	4226
administrativeState	4226
administrativeState_CM	4226
administrativeState_CM_HSDPA	4227
administrativeState_CM_PCH	4227
aseDIAdm	4227
aseUIAdm	4227
aseUIAdmOffset	4228
availabilityStatus	4228
availabilityStatus_CM	4228
availabilityStatus_CM_HSDPA	4228
availabilityStatus_CM_PCH	4229
bchPower	4229
beMarginAseDI	4229
beMarginAseUI	4230
beMarginDIcode	4230
beMarginDIPwr	4230
cellReserved	4230
cld	4231
compModeAdm	4231
congDIInterval	4231
congTimeOut	4231
congUIInterval	4232
coverageIndicator	4232
cqiFeedbackCycle	4232
CS_Speech_Usage_AA	4232
CS_Speech_Usage_AS	4233

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CS_Speech_Usage_SS	4233
deltaAck1	4234
deltaAck2	4234
deltaCqi1	4234
deltaCqi2	4234
deltaNack1	4235
deltaNack2	4235
deviceIndId	4235
directedRetryTarget	4235
dIcodeAdm	4236
ER_CS_Speech_Average_ICABH_Hold_Time_Denominator	4236
ER_CS_Speech_Average_ICABH_Hold_Time_Numerator	4236
ER_Percentage_UEs_with_1RL_in_ActiveSet_Numerator	4236
ER_Percentage_UEs_with_2RL_in_ActiveSet_Denominator	4237
ER_Percentage_UEs_with_2RL_in_ActiveSet_Numerator	4237
ER_Percentage_UEs_with_3RL_in_ActiveSet_Denominator	4237
ER_Percentage_UEs_with_3RL_in_ActiveSet_Numerator1	4237
ER_Percentage_UEs_with_3RL_in_ActiveSet_Numerator2	4238
ER_Percentage_UEs_with_4RL_in_ActiveSet_Denominator	4238
ER_Percentage_UEs_with_4RL_in_ActiveSet_Numerator1	4238
ER_Percentage_UEs_with_4RL_in_ActiveSet_Numerator2	4239
fach1RateMatchingAttrDI	4239
fach2RateMatchingAttrDI	4239
fachMeasOccaCycLenCoeff	4239
fPwrDown	4240
fPwrUp	4240
hardIfhoCorr	4240
hoType	4240
hsdpaUsersAdm	4241
hsMeasurementPowerOffset	4241
hsPathlossThreshold	4241
iFCong	4241
iFHyst	4242
iFOffset	4242
individualOffset	4242
initialAckNackRepetitionFactor	4242
initialCqiRepetitionFactor	4243
intCongFilter	4243
interFreqFddMeasIndicator	4243
interPwrMax	4243
interRate	4244
lac	4244
loadSharingGsmFraction	4244
loadSharingGsmThreshold	4244
loadSharingMargin	4245
localCellId	4245
maxFach1Power	4245
maxFach2Power	4246
maximumTransmissionPower	4246
maxPwrMax	4246
maxRate	4246

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

maxTxPowerUI	4247
minimumRate	4247
minPwrMax	4247
minPwrRI	4247
nInSyncInd	4248
NodeB_RELEASE	4248
nOutSyncInd	4248
numHsPdschCodes	4248
operationalState	4249
operationalState_CM	4249
operationalState_CM_HSDPA	4249
operationalState_CM_PCH	4249
pchPower	4250
PERLENSEC	4250
PERLENSEC_K	4250
pichMode	4251
pichPower	4251
pmAttNonBlindInterFreqHoCsConversational_RUP	4251
pmAttNonBlindInterFreqHoCsSpeech12_RUP	4251
pmAttNonBlindInterFreqHoPsInteractiveGreater64_RUP	4252
pmAttNonBlindInterFreqHoPsInteractiveLess64_RUP	4252
pmAttNonBlindInterFreqHoStreamingOther_RUP	4252
pmCellDowntimeAuto	4253
pmCellDowntimeMan	4253
pmChSwitchAttemptFachUra	4253
pmChSwitchAttemptUraFach	4254
pmChSwitchDch128Fach	4254
pmChSwitchDch384Fach	4254
pmChSwitchDch64Fach	4255
pmChSwitchFachDch	4255
pmChSwitchFachIdle	4255
pmChSwitchP128P384	4256
pmChSwitchP128P64	4256
pmChSwitchP384P128	4256
pmChSwitchP64P128	4257
pmChSwitchSp0Sp64	4257
pmChSwitchSp64Sp0	4257
pmChSwitchSuccFachUra	4258
pmChSwitchSuccUraFach	4258
pmCmAttDIHIs	4258
pmCmAttDISf2	4259
pmCmAttUIHIs	4259
pmCmAttUISf2	4259
pmCmStop	4260
pmCmSuccDIHIs	4260
pmCmSuccDISf2	4260
pmCmSuccUIHIs	4260
pmCmSuccUISf2	4261
pmCnRabReleaseCs64	4261
pmCnRabReleaseCsSpeech	4261
pmCnRabReleaseHs	4262

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmCnRabReleasePacket	4262
pmDchDIRlcUserPacketThp_00	4262
pmDchDIRlcUserPacketThp_01	4263
pmDchDIRlcUserPacketThp_02	4263
pmDchDIRlcUserPacketThp_03	4263
pmDchDIRlcUserPacketThp_04	4264
pmDchDIRlcUserPacketThp_05	4264
pmDchDIRlcUserPacketThp_06	4264
pmDchDIRlcUserPacketThp_07	4265
pmDchDIRlcUserPacketThp_08	4265
pmDchDIRlcUserPacketThp_09	4265
pmDchDIRlcUserPacketThp_10	4266
pmDchDIRlcUserPacketThp_11	4266
pmDchDIRlcUserPacketThp_12	4266
pmDchDIRlcUserPacketThp_13	4266
pmDchDIRlcUserPacketThp_14	4267
pmDchDIRlcUserPacketThp_15	4267
pmDchDIRlcUserPacketThp_16	4267
pmDchDIRlcUserPacketThp_17	4268
pmDchDIRlcUserPacketThp_18	4268
pmDchDIRlcUserPacketThp_19	4268
pmDchUIRlcUserPacketThp_00	4269
pmDchUIRlcUserPacketThp_01	4269
pmDchUIRlcUserPacketThp_02	4269
pmDchUIRlcUserPacketThp_03	4270
pmDchUIRlcUserPacketThp_04	4270
pmDchUIRlcUserPacketThp_05	4270
pmDchUIRlcUserPacketThp_06	4270
pmDchUIRlcUserPacketThp_07	4271
pmDchUIRlcUserPacketThp_08	4271
pmDchUIRlcUserPacketThp_09	4271
pmDchUIRlcUserPacketThp_10	4272
pmDchUIRlcUserPacketThp_11	4272
pmDchUIRlcUserPacketThp_12	4272
pmDchUIRlcUserPacketThp_13	4273
pmDchUIRlcUserPacketThp_14	4273
pmDchUIRlcUserPacketThp_15	4273
pmDchUIRlcUserPacketThp_16	4274
pmDchUIRlcUserPacketThp_17	4274
pmDchUIRlcUserPacketThp_18	4274
pmDchUIRlcUserPacketThp_19	4274
pmDiscRcLost	4275
pmDiscRelocOpt	4275
pmDiscRelocSucc	4275
pmDiscSigResFail	4276
pmDiscTRelocOverall	4276
pmDiscUeInit	4276
pmDiscUnspecified	4277
pmDiscUtran	4277
pmDIRlcUserPacketThp_0_5	4278
pmDIRlcUserPacketThp_100_120	4278

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDIRlcUserPacketThp_1000_1250	4278
pmDIRlcUserPacketThp_120_140	4278
pmDIRlcUserPacketThp_1250_1500	4279
pmDIRlcUserPacketThp_140_160	4279
pmDIRlcUserPacketThp_1500_1750	4279
pmDIRlcUserPacketThp_160_180	4279
pmDIRlcUserPacketThp_1750_2000	4280
pmDIRlcUserPacketThp_180_200	4280
pmDIRlcUserPacketThp_20_40	4280
pmDIRlcUserPacketThp_200_220	4281
pmDIRlcUserPacketThp_2000_2500	4281
pmDIRlcUserPacketThp_220_240	4281
pmDIRlcUserPacketThp_240_260	4281
pmDIRlcUserPacketThp_2500_3000	4282
pmDIRlcUserPacketThp_260_280	4282
pmDIRlcUserPacketThp_280_300	4282
pmDIRlcUserPacketThp_300_320	4283
pmDIRlcUserPacketThp_3000_4000	4283
pmDIRlcUserPacketThp_320_340	4283
pmDIRlcUserPacketThp_340_360	4283
pmDIRlcUserPacketThp_360_380	4284
pmDIRlcUserPacketThp_380_400	4284
pmDIRlcUserPacketThp_40_60	4284
pmDIRlcUserPacketThp_400_500	4284
pmDIRlcUserPacketThp_4000_5000	4285
pmDIRlcUserPacketThp_5_20	4285
pmDIRlcUserPacketThp_500_600	4285
pmDIRlcUserPacketThp_5000_more	4286
pmDIRlcUserPacketThp_60_80	4286
pmDIRlcUserPacketThp_600_700	4286
pmDIRlcUserPacketThp_700_800	4286
pmDIRlcUserPacketThp_80_100	4287
pmDIRlcUserPacketThp_800_900	4287
pmDIRlcUserPacketThp_900_1000	4287
pmDIRlcUserPacketThpP5MD_35	4287
pmDIRlcUserPacketThpP5MD_36	4288
pmDIRlcUserPacketThpP5MD_37	4288
pmDIRlcUserPacketThpP5MD_38	4289
pmDIRlcUserPacketThpP5MD_39	4289
pmDIRlcUserPacketThpP5MD_40	4289
pmDITrafficVolumeAmr4750	4290
pmDITrafficVolumeAmr5900	4290
pmDITrafficVolumeAmr7950	4290
pmDITrafficVolumeAmrWb	4291
pmDITrafficVolumeCs12	4291
pmDITrafficVolumeCs12Ps0	4291
pmDITrafficVolumeCs12Ps64	4292
pmDITrafficVolumeCs57	4292
pmDITrafficVolumeCs64	4292
pmDITrafficVolumeCs64Ps8	4293
pmDITrafficVolumePs128	4293

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmDITrafficVolumePs16	4293
pmDITrafficVolumePs384	4294
pmDITrafficVolumePs64	4294
pmDITrafficVolumePs8	4294
pmDITrafficVolumePsCommon	4295
pmDITrafficVolumePsIntHs	4295
pmDITrafficVolumePsStr128	4295
pmDITrafficVolumePsStr128Ps8	4296
pmDITrafficVolumePsStr16	4296
pmDITrafficVolumePsStr64	4296
pmDITrafficVolumePsStr64Ps8	4297
pmDITrafficVolumePsStrHs	4297
pmDIUpswitchAttemptHigh	4297
pmDIUpswitchAttemptHs	4298
pmDIUpswitchAttemptLow	4298
pmDIUpswitchAttemptMedium	4298
pmDIUpswitchSuccessHigh	4299
pmDIUpswitchSuccessHs	4299
pmDIUpswitchSuccessLow	4299
pmDIUpswitchSuccessMedium	4300
pmDownSwitchAttempt	4300
pmDownSwitchSuccess	4300
pmEnableEulHhoAttempt	4301
pmEnableHsHhoAttempt	4301
pmEnableHsHhoSuccess	4301
pmEulDowntimeAuto	4302
pmEulDowntimeMan	4302
pmEulHarqTransmTti10Failure	4302
pmEulHarqTransmTti10PsInteractive_01	4303
pmEulHarqTransmTti10PsInteractive_02	4303
pmEulHarqTransmTti10PsInteractive_03	4304
pmEulHarqTransmTti10PsInteractive_04	4304
pmEulHarqTransmTti10Srb_01	4304
pmEulHarqTransmTti10Srb_02	4305
pmEulHarqTransmTti10Srb_03	4305
pmEulHarqTransmTti10Srb_04	4305
pmEulMacesPduTti10DelivPsInteractive	4306
pmEulMacesPduTti10DelivSrb	4306
pmEulMacesPduTti10UndelivPsInteractive	4306
pmEulMacesPduTti10UndelivSrb	4307
pmEulRlcUserPacketThp_00	4307
pmEulRlcUserPacketThp_01	4308
pmEulRlcUserPacketThp_02	4308
pmEulRlcUserPacketThp_03	4308
pmEulRlcUserPacketThp_04	4309
pmEulRlcUserPacketThp_05	4309
pmEulRlcUserPacketThp_06	4309
pmEulRlcUserPacketThp_07	4310
pmEulRlcUserPacketThp_08	4310
pmEulRlcUserPacketThp_09	4310
pmEulRlcUserPacketThp_10	4311

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmEulRlcUserPacketThp_11	4311
pmEulRlcUserPacketThp_12	4311
pmEulRlcUserPacketThp_13	4312
pmEulRlcUserPacketThp_14	4312
pmEulRlcUserPacketThp_15	4312
pmEulRlcUserPacketThp_16	4313
pmEulRlcUserPacketThp_17	4313
pmEulRlcUserPacketThp_18	4313
pmEulToDchAttempt	4314
pmEulToDchSuccess	4314
pmFailedChSwitch	4314
pmFailedDchChSwitch	4315
pmFaultyTransportBlocksBcUl	4315
pmHsDIRlcUserPacketThp_00	4315
pmHsDIRlcUserPacketThp_01	4316
pmHsDIRlcUserPacketThp_02	4316
pmHsDIRlcUserPacketThp_03	4316
pmHsDIRlcUserPacketThp_04	4317
pmHsDIRlcUserPacketThp_05	4317
pmHsDIRlcUserPacketThp_06	4317
pmHsDIRlcUserPacketThp_07	4318
pmHsDIRlcUserPacketThp_08	4318
pmHsDIRlcUserPacketThp_09	4318
pmHsDIRlcUserPacketThp_10	4319
pmHsDIRlcUserPacketThp_11	4319
pmHsDIRlcUserPacketThp_12	4319
pmHsDIRlcUserPacketThp_13	4320
pmHsDIRlcUserPacketThp_14	4320
pmHsDIRlcUserPacketThp_15	4320
pmHsDIRlcUserPacketThp_16	4321
pmHsDIRlcUserPacketThp_17	4321
pmHsDIRlcUserPacketThp_18	4321
pmHsDIRlcUserPacketThp_19	4322
pmHsDIRlcUserPacketThp_20	4322
pmHsDIRlcUserPacketThp_21	4322
pmHsDIRlcUserPacketThp_22	4323
pmHsDIRlcUserPacketThp_23	4323
pmHsDIRlcUserPacketThp_24	4323
pmHsDIRlcUserPacketThp_25	4324
pmHsDIRlcUserPacketThp_26	4324
pmHsDIRlcUserPacketThp_27	4324
pmHsDIRlcUserPacketThp_28	4325
pmHsDIRlcUserPacketThp_29	4325
pmHsDowntimeAuto	4325
pmHsDowntimeMan	4326
pmHsdschOverloadDetection	4326
pmHsToDchAttempt	4326
pmHsToDchSuccess	4327
pmInactivityHsIdle	4327
pmInactivityMultiPsInt	4327
pmInactivityPsStreamIdle	4328

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmInterFreqMeasCmStart	4328
pmInterFreqMeasCmStop	4328
pmInterFreqMeasNoCmStart	4329
pmInterFreqMeasNoCmStop	4329
pmIratHoGsmMeasCmStart	4329
pmIratHoGsmMeasNoCmStart	4329
pmNoAttOutIratHoCs57_RUP	4330
pmNoAttOutIratHoMulti_RUP	4330
pmNoAttOutIratHoSpeech_RUP	4330
pmNoAttOutIratHoStandalone_RUP	4331
pmNoAttOutSbHoSpeech_RUP	4331
pmNoCellDchDisconnectAbnorm	4331
pmNoCellDchDisconnectNormal	4332
pmNoCellFachDisconnectAbnorm	4332
pmNoCellFachDisconnectNormal	4332
pmNoCellUpdAttempt	4333
pmNoCellUpdSuccess	4333
pmNoCs64DchDiscAbnorm	4333
pmNoCs64DchDiscNormal	4334
pmNoCsStreamDchDiscAbnorm	4334
pmNoCsStreamDchDiscNormal	4334
pmNoDirRetryAtt	4335
pmNoDirRetrySuccess	4335
pmNoDiscardSduDtchHs	4335
pmNoDiscardSduDtchHsPsStream	4336
pmNoDIChCodeAllocAltCodeCm	4336
pmNoDIChCodeAllocAttemptCm	4336
pmNoDIChCodeAllocAttemptSf128	4337
pmNoDIChCodeAllocAttemptSf16	4337
pmNoDIChCodeAllocAttemptSf256	4337
pmNoDIChCodeAllocAttemptSf32	4338
pmNoDIChCodeAllocAttemptSf64	4338
pmNoDIChCodeAllocAttemptSf8	4338
pmNoDIChCodeAllocFailureSf128	4339
pmNoDIChCodeAllocFailureSf16	4339
pmNoDIChCodeAllocFailureSf256	4339
pmNoDIChCodeAllocFailureSf32	4340
pmNoDIChCodeAllocFailureSf64	4340
pmNoDIChCodeAllocFailureSf8	4340
pmNoDscSduDtchDIPsStream	4341
pmNoEulCcAttempt	4341
pmNoEulCcSuccess	4341
pmNoEulHardHoReturnOldChSource	4342
pmNoEulHardHoReturnOldChTarget	4342
pmNoFailedAfterAdm	4342
pmNoFailedRabEstAttemptExceedConnLimit	4343
pmNoFailedRabEstAttemptLackDIase	4343
pmNoFailedRabEstAttemptLackDIChnlCode	4343
pmNoFailedRabEstAttemptLackDIHw	4344
pmNoFailedRabEstAttemptLackDIHwBest	4344
pmNoFailedRabEstAttemptLackDIPwr	4344

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoFailedRabEstAttemptLackUIAse	4345
pmNoFailedRabEstAttemptLackUIHw	4345
pmNoFailedRabEstAttemptLackUIHwBest	4345
pmNoFailOutIratHoCs57GsmFailure_RUP	4346
pmNoFailOutIratHoCs57ReturnOldChNotPhyChFail_RUP	4346
pmNoFailOutIratHoCs57ReturnOldChPhyChFail_RUP	4346
pmNoFailOutIratHoCs57UeRejection_RUP	4347
pmNoFailOutIratHoMultiGsmFailure_RUP	4347
pmNoFailOutIratHoMultiReturnOldChNotPhyChFail_RUP	4347
pmNoFailOutIratHoMultiReturnOldChPhyChFail_RUP	4348
pmNoFailOutIratHoMultiUeRejection_RUP	4348
pmNoFailOutIratHoSpeechGsmFailure_RUP	4348
pmNoFailOutIratHoSpeechReturnOldChNotPhyChFail_RUP	4349
pmNoFailOutIratHoSpeechReturnOldChPhyChFail_RUP	4349
pmNoFailOutIratHoSpeechUeRejection_RUP	4349
pmNoFailOutIratHoStandaloneGsmFailure_RUP	4350
pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail_RUP	4350
pmNoFailOutIratHoStandaloneUeRejection_RUP	4351
pmNoFailOutSbHoSpeechGsmFailure_RUP	4351
pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail_RUP	4351
pmNoFailOutSbHoSpeechReturnOldChPhyChFail_RUP	4352
pmNoFailOutSbHoSpeechUeRejection_RUP	4352
pmNoHsCcAttempt	4352
pmNoHsCcSuccess	4353
pmNoHsHardHoReturnOldChSource	4353
pmNoHsHardHoReturnOldChTarget	4353
pmNoIncomingEulHardHoAttempt	4354
pmNoIncomingEulHardHoSuccess	4354
pmNoIncomingHsHardHoAttempt	4354
pmNoIncomingHsHardHoSuccess	4355
pmNoIncomingPsStrHsHhoAtt	4355
pmNoIncomingPsStrHsHhoSucc	4355
pmNoInCslratHoAdmFail	4356
pmNoInCslratHoAtt	4356
pmNoInCslratHoSuccess	4356
pmNoLoadSharingRrcConn	4357
pmNoLoadSharingRrcConnCs	4357
pmNoLoadSharingRrcConnPs	4357
pmNoNonServingCellReqDeniedEul	4358
pmNoNormalRabReleaseAmrNb	4358
pmNoNormalRabReleaseAmrWb	4358
pmNoNormalRabReleaseCs64	4359
pmNoNormalRabReleaseCsStream	4359
pmNoNormalRabReleasePacket	4359
pmNoNormalRabReleasePacketStream	4359
pmNoNormalRabReleasePacketStream128	4359
pmNoNormalRabReleasePacketUra	4359
pmNoNormalRabReleasePsStreamHs	4360
pmNoNormalRabReleaseSpeech	4360
pmNoNormalRbReleaseEul	4360
pmNoNormalRbReleaseHs	4361

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoOfIurSwDownNgCong	4361
pmNoOfIurTermCsCong	4361
pmNoOfIurTermHsCong	4362
pmNoOfIurTermSpeechCong	4362
pmNoOfNonHoReqDeniedCs	4362
pmNoOfNonHoReqDeniedEul	4363
pmNoOfNonHoReqDeniedHs	4363
pmNoOfNonHoReqDeniedInteractive	4363
pmNoOfNonHoReqDeniedPsStr128	4363
pmNoOfNonHoReqDeniedPsStreaming	4364
pmNoOfNonHoReqDeniedSpeech	4364
pmNoOfReturningEmergencyCalls	4364
pmNoOfReturningRrcConn	4364
pmNoOfRlForDriftingUes	4364
pmNoOfRlForNonDriftingUes	4365
pmNoOfSampAseDI	4365
pmNoOfSampAseUI	4365
pmNoOfSwDownEulCong	4366
pmNoOfSwDownHsCong	4366
pmNoOfSwDownNgAdm	4366
pmNoOfSwDownNgCong	4367
pmNoOfSwDownNgHo	4367
pmNoOfTermCsCong	4367
pmNoOfTermHsCong	4368
pmNoOfTermSpeechCong	4368
pmNoOutgoingEulHardHoAttempt	4368
pmNoOutgoingEulHardHoSuccess	4369
pmNoOutgoingHsHardHoAttempt	4369
pmNoOutgoingHsHardHoSuccess	4369
pmNoOutgPsStreHsHhoAtt	4370
pmNoOutgPsStrHsHhoSucc	4370
pmNoOutIratCcAtt_RUP	4370
pmNoOutIratCcReturnOldCh_RUP	4371
pmNoOutIratCcSuccess_RUP	4371
pmNoPacketDchDiscAbnorm	4371
pmNoPacketDchDiscNormal	4372
pmNoPagingAttemptCnInitDcch	4372
pmNoPagingAttemptUtranRejected	4372
pmNoPagingType1Attempt	4373
pmNoPagingType1AttemptCs	4373
pmNoPagingType1AttemptPs	4373
pmNoPsStream128Ps8DchDiscAbnorm	4374
pmNoPsStream128Ps8DchDiscNormal	4374
pmNoPsStream64Ps8DchDiscAbnorm	4374
pmNoPsStream64Ps8DchDiscNormal	4375
pmNoPsStreamHsCcAttempt	4375
pmNoPsStreamHsCcSuccess	4375
pmNoPsStrHsHhoRtnOldSource	4376
pmNoPsStrHsHhoRtnOldTarget	4376
pmNoRabEstablishAttemptAmrNb	4376
pmNoRabEstablishAttemptAmrWb	4377

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoRabEstablishAttemptCs57	4377
pmNoRabEstablishAttemptCs64	4377
pmNoRabEstablishAttemptPacketInteractive	4377
pmNoRabEstablishAttemptPacketInteractiveHs	4377
pmNoRabEstablishAttemptPacketStream	4378
pmNoRabEstablishAttemptPacketStream128	4378
pmNoRabEstablishAttemptSpeech	4378
pmNoRabEstablishSuccessAmrNb	4378
pmNoRabEstablishSuccessAmrWb	4379
pmNoRabEstablishSuccessCs57	4379
pmNoRabEstablishSuccessCs64	4379
pmNoRabEstablishSuccessPacketInteractive	4380
pmNoRabEstablishSuccessPacketInteractiveHs	4380
pmNoRabEstablishSuccessPacketStream	4380
pmNoRabEstablishSuccessPacketStream128	4380
pmNoRabEstablishSuccessSpeech	4380
pmNoRabEstAttemptPsStreamHs	4381
pmNoRabEstAttPacketInteractiveEul	4381
pmNoRabEstBkRnBtPsStrHs	4381
pmNoRabEstBlkNPsiNtNonHsBt	4382
pmNoRabEstBlkNPsiStrNonHsBt	4382
pmNoRabEstBlkTnPsIntHsBt	4382
pmNoRabEstBlkTnPsStrHsBt	4383
pmNoRabEstBlkTnPsStrNonHsBt	4383
pmNoRabEstBlockNodeCs57Best	4383
pmNoRabEstBlockNodeCs64Best	4384
pmNoRabEstBlockNodePsIntHsBest	4384
pmNoRabEstBlockNodePsStrHsBest	4384
pmNoRabEstBlockNodeSpeechBest	4385
pmNoRabEstBlockRnPsStreamHs	4385
pmNoRabEstBlockTnCs57	4385
pmNoRabEstBlockTnCs57Best	4386
pmNoRabEstBlockTnCs64	4386
pmNoRabEstBlockTnCs64Best	4386
pmNoRabEstBlockTnPsIntHs	4387
pmNoRabEstBlockTnPsIntNonHs	4387
pmNoRabEstBlockTnPsIntNonHsBest	4387
pmNoRabEstBlockTnPsStrHs	4388
pmNoRabEstBlockTnPsStrNonHs	4388
pmNoRabEstBlockTnSpeech	4388
pmNoRabEstBlockTnSpeechBest	4389
pmNoRabEstSuccessPsStreamHs	4389
pmNoRabEstSuccPacketInteractiveEul	4389
pmNoReceivedSduDtchHs	4390
pmNoReceivedSduDtchHsPsStream	4390
pmNoRejRrcConnMpLoadC	4390
pmNoReqDeniedAdm	4391
pmNoRIDeniedAdm	4391
pmNoRrcConnReqBlockNodeCs	4391
pmNoRrcConnReqBlockNodePs	4392
pmNoRrcConnReqBlockTnCs	4392

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmNoRrcConnReqBlockTnCsBest	4392
pmNoRrcConnReqBlockTnPs	4393
pmNoRrcConnReqBlockTnPsBest	4393
pmNoRrcCsReqDeniedAdm	4393
pmNoRrcPsReqDeniedAdm	4394
pmNoRrcReqDeniedAdm	4394
pmNoRxSduDtchDIPsStr	4394
pmNoRxSduDtchUIPsStre	4395
pmNoServingCellReqDeniedEul	4395
pmNoSpeechDchDiscAbnorm	4395
pmNoSpeechDchDiscNormal	4396
pmNoSuccessOutlratHoCs57_RUP	4396
pmNoSuccessOutlratHoMulti_RUP	4396
pmNoSuccessOutlratHoSpeech_RUP	4397
pmNoSuccessOutlratHoStandalone_RUP	4397
pmNoSuccessOutSbHoSpeech_RUP	4397
pmNoSysRelSpeechNeighbr	4398
pmNoSysRelSpeechSoHo	4398
pmNoSysRelSpeechULSynch	4398
pmNoSystemRabReleaseAmrNb	4399
pmNoSystemRabReleaseAmrWb	4399
pmNoSystemRabReleaseCs64	4399
pmNoSystemRabReleaseCsStream	4399
pmNoSystemRabReleasePacket	4400
pmNoSystemRabReleasePacketStream	4400
pmNoSystemRabReleasePacketStream128	4400
pmNoSystemRabReleasePacketUra	4400
pmNoSystemRabReleasePsStreamHs	4401
pmNoSystemRabReleaseSpeech	4401
pmNoSystemRbReleaseEul	4401
pmNoSystemRbReleaseHs	4402
pmNoTimesCellFailAddToActSet	4402
pmNoTimesIfhoCellFailAddToActSet	4402
pmNoTimesIfhoRIAddToActSet	4403
pmNoTimesRIAddToActSet	4403
pmNoTimesRIDelFrActSet	4403
pmNoTimesRIReplnActSet	4404
pmNoTpSwitchSp64Speech	4404
pmNoUraUpdAttempt	4404
pmNoUraUpdSuccess	4405
pmPhyChnlReconfigAttempt	4405
pmPhyChnlReconfigSuccess	4405
pmPsStreamHsToDchAttempt	4406
pmPsStreamHsToDchSuccess	4406
pmRabEstablishAttemptBackground	4406
pmRabEstablishAttemptConvers	4407
pmRabEstablishAttemptInteractive	4407
pmRabEstablishAttemptStream	4407
pmRabEstablishEcAttempt	4408
pmRabEstablishEcSuccess	4408
pmRabEstablishSuccessBackground	4408

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRabEstablishSuccessConvers	4409
pmRabEstablishSuccessInteractive	4409
pmRabEstablishSuccessStream	4409
pmRabEstFailDirRetry	4410
pmRabEstFailGuarBitRateUIUnavail	4410
pmRabEstFailInvalidRabId	4410
pmRabEstFailInvalidRabParamComb	4411
pmRabEstFailInvalidRabParamValue	4411
pmRabEstFailIuUPFail	4411
pmRabEstFailMaxBitRateDIUnavail	4412
pmRabEstFailMaxBitRateUIUnavail	4412
pmRabEstFailNoResource	4412
pmRabEstFailTrafficClassUnavail	4413
pmRabEstFailTransferDelay	4413
pmRabEstFailUPNoSupport	4413
pmRabEstFailVioGuarBitRate	4414
pmRabEstFailVioSduParam	4414
pmRabEstFailVioTrafficHandlingPrio	4414
pmRabReleasePsBackground	4415
pmRabReleasePsInteractive	4415
pmRadioBearerEstablishAttempt	4415
pmRadioBearerEstablishSuccess	4416
pmRadioBearerReconfigAttempt	4416
pmRadioBearerReconfigSuccess	4416
pmRanapDiscNormal	4417
pmRes1_0	4417
pmRes1_1	4417
pmRes1_10	4418
pmRes1_11	4418
pmRes1_12	4418
pmRes1_13	4419
pmRes1_14	4419
pmRes1_15	4419
pmRes1_16	4419
pmRes1_17	4420
pmRes1_18	4420
pmRes1_2	4420
pmRes1_3	4421
pmRes1_4	4421
pmRes1_5	4421
pmRes1_6	4422
pmRes1_7	4422
pmRes1_8	4422
pmRes1_9	4423
pmRes2_0	4423
pmRes2_1	4423
pmRes2_10	4424
pmRes2_11	4424
pmRes2_12	4424
pmRes2_13	4424
pmRes2_14	4425

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRes2_15	4425
pmRes2_16	4425
pmRes2_17	4426
pmRes2_18	4426
pmRes2_2	4426
pmRes2_3	4427
pmRes2_4	4427
pmRes2_5	4427
pmRes2_6	4428
pmRes2_7	4428
pmRes2_8	4428
pmRes2_9	4428
pmRes3_0	4429
pmRes3_1	4429
pmRes3_10	4429
pmRes3_11	4430
pmRes3_12	4430
pmRes3_13	4430
pmRes3_14	4431
pmRes3_15	4431
pmRes3_16	4431
pmRes3_17	4432
pmRes3_18	4432
pmRes3_2	4432
pmRes3_3	4433
pmRes3_4	4433
pmRes3_5	4433
pmRes3_6	4433
pmRes3_7	4434
pmRes3_8	4434
pmRes3_9	4434
pmRes4_0	4435
pmRes4_1	4435
pmRes4_10	4435
pmRes4_11	4436
pmRes4_12	4436
pmRes4_13	4436
pmRes4_14	4437
pmRes4_15	4437
pmRes4_16	4437
pmRes4_17	4438
pmRes4_18	4438
pmRes4_2	4438
pmRes4_3	4438
pmRes4_4	4439
pmRes4_5	4439
pmRes4_6	4439
pmRes4_7	4440
pmRes4_8	4440
pmRes4_9	4440
pmRes5_0	4441

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRes5_1	4441
pmRes5_10	4441
pmRes5_11	4442
pmRes5_12	4442
pmRes5_13	4442
pmRes5_14	4443
pmRes5_15	4443
pmRes5_16	4443
pmRes5_17	4443
pmRes5_18	4444
pmRes5_2	4444
pmRes5_3	4444
pmRes5_4	4445
pmRes5_5	4445
pmRes5_6	4445
pmRes5_7	4446
pmRes5_8	4446
pmRes5_9	4446
pmRes6_0	4447
pmRes6_1	4447
pmRes6_10	4447
pmRes6_11	4448
pmRes6_12	4448
pmRes6_13	4448
pmRes6_14	4448
pmRes6_15	4449
pmRes6_16	4449
pmRes6_17	4449
pmRes6_18	4450
pmRes6_2	4450
pmRes6_3	4450
pmRes6_4	4451
pmRes6_5	4451
pmRes6_6	4451
pmRes6_7	4452
pmRes6_8	4452
pmRes6_9	4452
pmRIAddAttemptsBestCellCsConvers	4453
pmRIAddAttemptsBestCellPacketHigh	4453
pmRIAddAttemptsBestCellPacketLow	4453
pmRIAddAttemptsBestCellSpeech	4453
pmRIAddAttemptsBestCellStandAlone	4454
pmRIAddAttemptsBestCellStream	4454
pmRIAddSuccessBestCellCsConvers	4454
pmRIAddSuccessBestCellPacketHigh	4454
pmRIAddSuccessBestCellPacketLow	4455
pmRIAddSuccessBestCellSpeech	4455
pmRIAddSuccessBestCellStandAlone	4455
pmRIAddSuccessBestCellStream	4456
pmRrcEstablishAttemptBackground	4456
pmRrcEstablishAttemptConvers	4456

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmRrcEstablishAttemptInteractive	4457
pmRrcEstablishAttemptStream	4457
pmRrcEstablishSuccessBackground	4457
pmRrcEstablishSuccessConvers	4458
pmRrcEstablishSuccessInteractive	4458
pmRrcEstablishSuccessStream	4458
pmSamplesActDIRlcTotPacketThp	4459
pmSamplesActDIRlcUserPacketThp	4459
pmSamplesActUIRlcTotPacketThp	4459
pmSamplesActUIRlcUserPacketThp	4460
pmSamplesAmr12200RabEstablish	4460
pmSamplesAmr4750RabEstablish	4460
pmSamplesAmr5900RabEstablish	4461
pmSamplesAmr7950RabEstablish	4461
pmSamplesAmrWbRabEstablish	4461
pmSamplesBestAmr12200RabEstablish	4462
pmSamplesBestAmr4750RabEstablish	4462
pmSamplesBestAmr5900RabEstablish	4462
pmSamplesBestAmr7950RabEstablish	4463
pmSamplesBestAmrWbRabEstablish	4463
pmSamplesBestCs12Establish	4463
pmSamplesBestCs12PsIntRabEstablish	4464
pmSamplesBestCs57RabEstablish	4464
pmSamplesBestCs64PsIntRabEstablish	4464
pmSamplesBestCs64RabEstablish	4465
pmSamplesBestDchPsIntRabEstablish	4465
pmSamplesBestPsEulRabEstablish	4465
pmSamplesBestPsHsAdchRabEstablish	4466
pmSamplesBestPsStr128Ps8RabEstablish	4466
pmSamplesBestPsStr64Ps8RabEstablish	4466
pmSamplesBestPsStreamHsRabEst	4467
pmSamplesCompMode	4467
pmSamplesCs12Ps0RabEstablish	4467
pmSamplesCs12Ps64RabEstablish	4468
pmSamplesCs12RabEstablish	4468
pmSamplesCs57RabEstablish	4468
pmSamplesCs64Ps8RabEstablish	4469
pmSamplesCs64RabEstablish	4469
pmSamplesDchDIRlcTotPacketThp	4469
pmSamplesDchDIRlcUserPacketThp	4470
pmSamplesDchUIRlcTotPacketThp	4470
pmSamplesDchUIRlcUserPacketThp	4470
pmSamplesDI Code	4471
pmSamplesDIRlcUserThpPsStr128	4471
pmSamplesDIRlcUserThpPsStr64	4471
pmSamplesDIRlcUserThpPsStrHs	4472
pmSamplesEulRlcTotPacketThp	4472
pmSamplesEulRlcUserPacketThp	4472
pmSamplesFachPsIntRabEstablish	4473
pmSamplesHsDIRlcTotPacketThp	4473
pmSamplesHsDIRlcUserPacketThp	4474

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSamplesPacketDIDelay_0	4474
pmSamplesPacketDIDelay_1	4474
pmSamplesPacketDIDelay_2	4475
pmSamplesPacketLatency_0	4475
pmSamplesPacketLatency_1	4475
pmSamplesPacketLatency_2	4476
pmSamplesPktLatencyPsStrHs_0	4476
pmSamplesPktLatencyPsStrHs_1	4476
pmSamplesPktLatencyPsStrHs_2	4477
pmSamplesPs128RabEstablish	4477
pmSamplesPs384RabEstablish	4477
pmSamplesPs64RabEstablish	4478
pmSamplesPsEulRabEstablish	4478
pmSamplesPsHsAdchRabEstablish	4478
pmSamplesPsInteractive	4479
pmSamplesPsStr128Ps8RabEstablish	4479
pmSamplesPsStr64Ps8RabEstablish	4479
pmSamplesPsStreamHsRabEst	4480
pmSamplesRabFach	4480
pmSamplesRrcOnlyEstablish	4480
pmSamplesSf4UI	4481
pmSamplesUesWith1RIs1RlInActSet	4481
pmSamplesUesWith1RIs2RlInActSet	4481
pmSamplesUesWith1RIs3RlInActSet	4482
pmSamplesUesWith2RIs2RlInActSet	4482
pmSamplesUesWith2RIs3RlInActSet	4482
pmSamplesUesWith2RIs4RlInActSet	4483
pmSamplesUesWith3RIs3RlInActSet	4483
pmSamplesUesWith3RIs4RlInActSet	4483
pmSamplesUesWith4RIs4RlInActSet	4483
pmSamplesUIRlcUserThpPsStr128	4484
pmSamplesUIRlcUserThpPsStr16	4484
pmSamplesUIRlcUserThpPsStr32	4485
pmSamplesUIRssi	4485
pmServiceDeniedCodeShortageCs57	4485
pmServiceDeniedCodeShortageCs64	4486
pmServiceDeniedCodeShortageCsSpeech	4486
pmServiceDeniedCodeShortageHs	4486
pmServiceDeniedCodeShortagePacket	4487
pmServiceDeniedCodeShortagePs64	4487
pmServiceDeniedDIPowerCs57	4487
pmServiceDeniedDIPowerCs64	4488
pmServiceDeniedDIPowerCsSpeech	4488
pmServiceDeniedDIPowerHs	4488
pmServiceDeniedDIPowerPacket	4489
pmServiceDeniedDIPowerPs64	4489
pmServiceDeniedOtherCs57	4489
pmServiceDeniedOtherCs64	4490
pmServiceDeniedOtherCsSpeech	4490
pmServiceDeniedOtherHs	4490
pmServiceDeniedOtherPacket	4491

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmServiceDeniedOtherPs64	4491
pmServiceDeniedUIIntCs57	4491
pmServiceDeniedUIIntCs64	4492
pmServiceDeniedUIIntCsSpeech	4492
pmServiceDeniedUIIntHs	4492
pmServiceDeniedUIIntPacket	4493
pmServiceDeniedUIIntPs64	4493
pmSuccNonBlindInterFreqHoCsConversational_RUP	4493
pmSuccNonBlindInterFreqHoCsSpeech12_RUP	4494
pmSuccNonBlindInterFreqHoPsInteractiveGreater64_RUP	4494
pmSuccNonBlindInterFreqHoPsInteractiveLess64_RUP	4494
pmSuccNonBlindInterFreqHoStreamingOther_RUP	4495
pmSumActDIRlcTotPacketThp	4495
pmSumActDIRlcUserPacketThp	4495
pmSumActUIRlcTotPacketThp	4496
pmSumActUIRlcUserPacketThp	4496
pmSumAmr12200RabEstablish	4496
pmSumAmr4750RabEstablish	4497
pmSumAmr5900RabEstablish	4497
pmSumAmr7950RabEstablish	4497
pmSumAmrWbRabEstablish	4498
pmSumBestAmr12200RabEstablish	4498
pmSumBestAmr4750RabEstablish	4498
pmSumBestAmr5900RabEstablish	4499
pmSumBestAmr7950RabEstablish	4499
pmSumBestAmrWbRabEstablish	4499
pmSumBestCs12Establish	4500
pmSumBestCs12PsIntRabEstablish	4500
pmSumBestCs57RabEstablish	4500
pmSumBestCs64PsIntRabEstablish	4501
pmSumBestCs64RabEstablish	4501
pmSumBestDchPsIntRabEstablish	4501
pmSumBestPsEulRabEstablish	4502
pmSumBestPsHsAdchRabEstablish	4502
pmSumBestPsStr128Ps8RabEstablish	4502
pmSumBestPsStr64Ps8RabEstablish	4503
pmSumBestPsStreamHsRabEst	4503
pmSumCompMode	4503
pmSumCs12Ps0RabEstablish	4504
pmSumCs12Ps64RabEstablish	4504
pmSumCs12RabEstablish	4504
pmSumCs57RabEstablish	4505
pmSumCs64Ps8RabEstablish	4505
pmSumCs64RabEstablish	4505
pmSumDchDIRlcTotPacketThp	4506
pmSumDchDIRlcUserPacketThp	4506
pmSumDchUIRlcTotPacketThp	4507
pmSumDchUIRlcUserPacketThp	4507
pmSumDICode	4507
pmSumDIRlcUserThpPsStream128	4508
pmSumDIRlcUserThpPsStream64	4508

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmSumDIRlcUserThpPsStreamHs	4508
pmSumEuIRlcTotPacketThp	4509
pmSumEuIRlcUserPacketThp	4509
pmSumFachPsIntRabEstablish	4510
pmSumHsDIRlcTotPacketThp	4510
pmSumHsDIRlcUserPacketThp	4510
pmSumOfSampAseDI	4511
pmSumOfSampAseUI	4511
pmSumOfTimesMeasOIDI	4511
pmSumOfTimesMeasOIUI	4511
pmSumPacketDIDelay_0	4512
pmSumPacketDIDelay_1	4512
pmSumPacketDIDelay_2	4512
pmSumPacketLatency_0	4513
pmSumPacketLatency_1	4513
pmSumPacketLatency_2	4513
pmSumPacketLatencyPsStreamHs_0	4514
pmSumPacketLatencyPsStreamHs_1	4514
pmSumPacketLatencyPsStreamHs_2	4514
pmSumPs128RabEstablish	4515
pmSumPs384RabEstablish	4515
pmSumPs64RabEstablish	4515
pmSumPsEuIRabEstablish	4516
pmSumPsHsAdchRabEstablish	4516
pmSumPsInteractive	4516
pmSumPsStr128Ps8RabEstablish	4517
pmSumPsStr64Ps8RabEstablish	4517
pmSumPsStreamHsRabEst	4517
pmSumRabFach	4518
pmSumRrcOnlyEstablish	4518
pmSumSf4UI	4518
pmSumSqrDICode	4519
pmSumSqrUIRssi	4519
pmSumUesWith1RIs1RIInActSet	4519
pmSumUesWith1RIs2RIInActSet	4520
pmSumUesWith1RIs3RIInActSet	4520
pmSumUesWith2RIs2RIInActSet	4520
pmSumUesWith2RIs3RIInActSet	4521
pmSumUesWith2RIs4RIInActSet	4521
pmSumUesWith3RIs3RIInActSet	4521
pmSumUesWith3RIs4RIInActSet	4521
pmSumUesWith4RIs4RIInActSet	4522
pmSumUIRlcUserThpPsStream128	4522
pmSumUIRlcUserThpPsStream16	4522
pmSumUIRlcUserThpPsStream32	4523
pmSumUIRssi	4523
pmSystemRabReleaselfhoCs	4524
pmSystemRabReleaselfhoPs	4524
pmSystemRabReleaselratCs	4524
pmSystemRabReleaselratPs	4525
pmTotalTimeDICellCong	4525

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTotalTimeHsdscOverload	4525
pmTotalTimeUlCellCong	4525
pmTotNoRrcConnectAttIratCcOrder	4526
pmTotNoRrcConnectAttIratCellResel	4526
pmTotNoRrcConnectFailCongIratCcOrder	4526
pmTotNoRrcConnectFailCongIratCellResel	4527
pmTotNoRrcConnectReq	4527
pmTotNoRrcConnectReqCs	4527
pmTotNoRrcConnectReqCsSucc	4528
pmTotNoRrcConnectReqDetach	4528
pmTotNoRrcConnectReqEmergency	4528
pmTotNoRrcConnectReqOrigBackgrd	4529
pmTotNoRrcConnectReqOrigConv	4529
pmTotNoRrcConnectReqOrigHigh	4529
pmTotNoRrcConnectReqOrigInt	4530
pmTotNoRrcConnectReqOrigLow	4530
pmTotNoRrcConnectReqOrigStream	4530
pmTotNoRrcConnectReqOrigSub	4531
pmTotNoRrcConnectReqPs	4531
pmTotNoRrcConnectReqPsSucc	4531
pmTotNoRrcConnectReqReEst	4532
pmTotNoRrcConnectReqRegister	4532
pmTotNoRrcConnectReqSms	4532
pmTotNoRrcConnectReqSuccess	4533
pmTotNoRrcConnectReqTermBackgrd	4533
pmTotNoRrcConnectReqTermConv	4533
pmTotNoRrcConnectReqTermHigh	4534
pmTotNoRrcConnectReqTermInt	4534
pmTotNoRrcConnectReqTermLow	4534
pmTotNoRrcConnectReqTermStream	4535
pmTotNoRrcConnectReqTermUnknown	4535
pmTotNoRrcConnectSuccDetach	4535
pmTotNoRrcConnectSuccEmergency	4536
pmTotNoRrcConnectSuccessIratCcOrder	4536
pmTotNoRrcConnectSuccessIratCellResel	4536
pmTotNoRrcConnectSuccOrigBackgrd	4537
pmTotNoRrcConnectSuccOrigConv	4537
pmTotNoRrcConnectSuccOrigHigh	4537
pmTotNoRrcConnectSuccOrigInt	4538
pmTotNoRrcConnectSuccOrigLow	4538
pmTotNoRrcConnectSuccOrigStream	4538
pmTotNoRrcConnectSuccOrigSub	4539
pmTotNoRrcConnectSuccReEst	4539
pmTotNoRrcConnectSuccRegister	4539
pmTotNoRrcConnectSuccTermBackgrd	4540
pmTotNoRrcConnectSuccTermConv	4540
pmTotNoRrcConnectSuccTermHigh	4541
pmTotNoRrcConnectSuccTermInt	4541
pmTotNoRrcConnectSuccTermLow	4541
pmTotNoRrcConnectSuccTermStream	4542
pmTotNoRrcConnectSuccTermUnknown	4542

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmTotNoTermRrcConnectReq	4542
pmTotNoTermRrcConnectReqCs	4543
pmTotNoTermRrcConnectReqCsSucc	4543
pmTotNoTermRrcConnectReqPs	4543
pmTotNoTermRrcConnectReqPsSucc	4544
pmTotNoTermRrcConnectReqSucc	4544
pmTotNoUtranRejRrcConnReq	4544
pmTotRabEstSuccess	4545
pmTotServiceDeniedCs57	4545
pmTotServiceDeniedCs64	4545
pmTotServiceDeniedCsSpeech	4546
pmTotServiceDeniedHs	4546
pmTotServiceDeniedPacket	4546
pmTotServiceDeniedPs64	4547
pmTransportBlocksBcUl	4547
pmTrChnlReconfigAttempt	4547
pmTrChnlReconfigSuccess	4547
pmUIRlcUserPacketThp_0_5	4548
pmUIRlcUserPacketThp_100_120	4548
pmUIRlcUserPacketThp_120_140	4548
pmUIRlcUserPacketThp_140_160	4549
pmUIRlcUserPacketThp_160_180	4549
pmUIRlcUserPacketThp_180_200	4549
pmUIRlcUserPacketThp_20_40	4549
pmUIRlcUserPacketThp_200_220	4550
pmUIRlcUserPacketThp_220_240	4550
pmUIRlcUserPacketThp_240_260	4550
pmUIRlcUserPacketThp_260_280	4551
pmUIRlcUserPacketThp_280_300	4551
pmUIRlcUserPacketThp_300_320	4551
pmUIRlcUserPacketThp_320_340	4551
pmUIRlcUserPacketThp_340_360	4552
pmUIRlcUserPacketThp_360_more	4552
pmUIRlcUserPacketThp_40_60	4552
pmUIRlcUserPacketThp_5_20	4552
pmUIRlcUserPacketThp_60_80	4553
pmUIRlcUserPacketThp_80_100	4553
pmUIRlcUserPacketThpP5MD_19	4553
pmUIRlcUserPacketThpP5MD_20	4553
pmUIRlcUserPacketThpP5MD_21	4554
pmUIRlcUserPacketThpP5MD_22	4554
pmUIRlcUserPacketThpP5MD_23	4555
pmUIRlcUserPacketThpP5MD_24	4555
pmUIRlcUserPacketThpP5MD_25	4555
pmUIRlcUserPacketThpP5MD_26	4556
pmUIRlcUserPacketThpP5MD_27	4556
pmUIRlcUserPacketThpP5MD_28	4556
pmUIRlcUserPacketThpP5MD_29	4557
pmUITrafficVolumeAmr4750	4557
pmUITrafficVolumeAmr5900	4557
pmUITrafficVolumeAmr7950	4558

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmUITrafficVolumeAmrWb	4558
pmUITrafficVolumeCs12	4558
pmUITrafficVolumeCs12Ps0	4559
pmUITrafficVolumeCs12Ps64	4559
pmUITrafficVolumeCs57	4559
pmUITrafficVolumeCs64	4560
pmUITrafficVolumeCs64Ps8	4560
pmUITrafficVolumePs128	4560
pmUITrafficVolumePs16	4561
pmUITrafficVolumePs384	4561
pmUITrafficVolumePs64	4561
pmUITrafficVolumePs8	4562
pmUITrafficVolumePsCommon	4562
pmUITrafficVolumePsIntEul	4562
pmUITrafficVolumePsStr128	4563
pmUITrafficVolumePsStr128Ps8	4563
pmUITrafficVolumePsStr16	4563
pmUITrafficVolumePsStr32	4564
pmUITrafficVolumePsStr64Ps8	4564
pmUIUpswitchAttemptEul	4565
pmUIUpswitchAttemptHigh	4565
pmUIUpswitchAttemptLow	4565
pmUIUpswitchAttemptMedium	4566
pmUIUpswitchSuccessEul	4566
pmUIUpswitchSuccessHigh	4566
pmUIUpswitchSuccessLow	4567
pmUIUpswitchSuccessMedium	4567
pmUpswitchFachHsAttempt	4567
pmUpswitchFachHsSuccess	4567
pmUtranRabReleaseDlIntCs64	4568
pmUtranRabReleaseDlIntCsSpeech	4568
pmUtranRabReleaseDlIntHs	4568
pmUtranRabReleaseDlIntPacket	4569
pmUtranRabReleaseOtherCs64	4569
pmUtranRabReleaseOtherCsSpeech	4569
pmUtranRabReleaseOtherHs	4570
pmUtranRabReleaseOtherPacket	4570
pmUtranRabReleaseRIFailCs64	4570
pmUtranRabReleaseRIFailCsSpeech	4571
pmUtranRabReleaseRIFailHs	4571
pmUtranRabReleaseRIFailPacket	4571
pmUtranRabReleaseUlIntCs64	4571
pmUtranRabReleaseUlIntCsSpeech	4572
pmUtranRabReleaseUlIntHs	4572
pmUtranRabReleaseUlIntPacket	4572
pOffset1Fach	4573
pOffset3Fach	4573
primaryCpichPower	4573
primarySchPower	4574
primaryScramblingCode	4574
pwrAdm	4574

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pwrAdmOffset	4574
pwrCongFilter	4575
pwrEstFact	4575
pwrHyst	4575
pwrOffset	4575
qHyst1	4576
qHyst2	4576
qQualMin	4576
qRxLevMin	4576
qualMeasQuantity	4577
rac	4577
releaseAseDI	4577
releaseAseDIGhs	4578
releaseAseDINg	4578
reservedBy	4578
reservedBy_CM	4578
rlFailureT	4579
routingAreaRef	4579
sac	4579
sccpchOffset	4579
sccpchOffset_CM_PCH	4580
secondarySchPower	4580
sf16Adm	4580
sf16AdmUI	4581
sf16gAdm	4581
sf32Adm	4581
sf4AdmUI	4581
sf4UIPathlossThreshold	4582
sf8Adm	4582
sf8AdmUI	4582
sHcsRat	4583
sib1PlmnScopeValueTag	4583
sInterSearch	4583
sIntraSearch	4583
snDirectedRetryTarget	4584
sRatSearch	4584
tCell	4584
tfsFlexConstant	4584
tmCongAction	4585
tmCongActionGhs	4585
tmCongActionNg	4585
tmInitialG	4585
tmInitialGhs	4586
treSelection	4586
txFilter	4586
txInterval	4586
uarfcnDI	4587
uarfcnUI	4587
ulPathlossCheckEnabled	4587
usageState	4588
usedFreqThresh2dEcno	4588

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

usedFreqThresh2dRscp	4588
userLabel	4588
userLabel_CM	4589
userLabel_CM_HSDSCH	4589
userLabel_CM_PCH	4589
utranCellIubLink	4590
utranCellPosition_PC1	4590
utranCellPosition_PC10	4590
utranCellPosition_PC11	4591
utranCellPosition_PC12	4591
utranCellPosition_PC13	4591
utranCellPosition_PC14	4592
utranCellPosition_PC15	4592
utranCellPosition_PC2	4593
utranCellPosition_PC3	4593
utranCellPosition_PC4	4593
utranCellPosition_PC5	4594
utranCellPosition_PC6	4594
utranCellPosition_PC7	4595
utranCellPosition_PC8	4595
utranCellPosition_PC9	4595
UtranRelation Primitive Calculations	4596
adjacentCell	4596
GRAPHmultiLineSeparator	4596
Inter_Frequency_Handover_Success_Rate_CS_non_speech	4596
Inter_Frequency_Handover_Success_Rate_Other_Services	4596
Inter_Frequency_Handover_Success_Rate_PS_Interactive_64OrLess	4597
Inter_Frequency_Handover_Success_Rate_PS_Interactive_Greater_64	4597
Inter_Frequency_HO_Success_Rate_Speech	4597
NUMDAYS	4597
NUMHOURS	4597
RIAddSuccBestCellSpeechRate	4597
UtranRelation Peg Counts	4598
cld	4598
individualOffset	4598
lac	4598
loadSharingCandidate	4599
maxTxPowerUI	4599
mcc	4599
mnc	4599
PERLENSEC	4600
PERLENSEC_K	4600
pmAttNonBlindInterFreqHoCsConversational	4600
pmAttNonBlindInterFreqHoCsSpeech12	4601
pmAttNonBlindInterFreqHoPsInteractiveGreater64	4601
pmAttNonBlindInterFreqHoPsInteractiveLess64	4601
pmAttNonBlindInterFreqHoStreamingOther	4602
pmFailNonBlindInterFreqHoFailRevertCsConversational	4602
pmFailNonBlindInterFreqHoFailRevertCsSpeech12	4602
pmFailNonBlindInterFreqHoFailRevertPsInteractiveGreater64	4603
pmFailNonBlindInterFreqHoFailRevertPsInteractiveLess64	4603

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmFailNonBlindInterFreqHoFailRevertStreamingOther	4603
pmFailNonBlindInterFreqHoRevertCsConversational	4604
pmFailNonBlindInterFreqHoRevertCsSpeech12	4604
pmFailNonBlindInterFreqHoRevertPsInteractiveGreater64	4604
pmFailNonBlindInterFreqHoRevertPsInteractiveLess64	4605
pmFailNonBlindInterFreqHoRevertStreamingOther	4605
pmNoAttOutCnhhoCsNonSpeech	4605
pmNoAttOutCnhhoPsConnRelease	4606
pmNoAttOutCnhhoSpeech	4606
pmNoSuccOutCnhhoCsNonSpeech	4606
pmNoSuccOutCnhhoSpeech	4607
pmRIAddAttemptsBestCellCsConvers	4607
pmRIAddAttemptsBestCellPacketHigh	4607
pmRIAddAttemptsBestCellPacketLow	4608
pmRIAddAttemptsBestCellSpeech	4608
pmRIAddAttemptsBestCellStandAlone	4609
pmRIAddAttemptsBestCellStream	4609
pmRIAddSuccessBestCellCsConvers	4609
pmRIAddSuccessBestCellPacketHigh	4610
pmRIAddSuccessBestCellPacketLow	4610
pmRIAddSuccessBestCellSpeech	4610
pmRIAddSuccessBestCellStandAlone	4611
pmRIAddSuccessBestCellStream	4611
pmSuccNonBlindInterFreqHoCsConversational	4611
pmSuccNonBlindInterFreqHoCsSpeech12	4612
pmSuccNonBlindInterFreqHoPsInteractiveGreater64	4612
pmSuccNonBlindInterFreqHoPsInteractiveLess64	4612
pmSuccNonBlindInterFreqHoStreamingOther	4613
primaryCpichPower	4613
primaryScramblingCode	4613
qOffset1sn	4614
qOffset2sn	4614
qQualMin	4614
qRxLevMin	4615
rac	4615
reservedBy	4615
rncl	4616
uarfcnDI	4616
uarfcnUI	4616
userLabel	4617
UtranRelationName	4617
Vc12Ttp_NodeB Primitive Calculations	4617
GRAPHmultiLineSeparator	4617
NUMDAYS	4618
NUMHOURS	4618
Vc12Ttp_NodeB Peg Counts	4618
NodeB_RELEASE	4618
PERLENSEC	4618
PERLENSEC_K	4618
pmVcBbe	4619
pmVcEs	4619

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmVcSes	4619
pmVcUas	4620
Vc12Ttp_RNC Primitive Calculations	4620
GRAPHmultiLineSeparator	4620
NUMDAYS	4620
NUMHOURS	4620
Vc12Ttp_RNC Peg Counts	4621
PERLENSEC	4621
PERLENSEC_K	4621
pmVcBbe	4621
pmVcEs	4622
pmVcSes	4622
pmVcUas	4622
RNC_RELEASE	4623
Vc4Ttp_NodeB Primitive Calculations	4623
GRAPHmultiLineSeparator	4623
NUMDAYS	4623
NUMHOURS	4623
Vc4Ttp_NodeB Peg Counts	4623
NodeB_RELEASE	4623
PERLENSEC	4624
PERLENSEC_K	4624
pmVcBbe	4624
pmVcEs	4625
pmVcSes	4625
pmVcUas	4625
Vc4Ttp_RNC Primitive Calculations	4626
GRAPHmultiLineSeparator	4626
NUMDAYS	4626
NUMHOURS	4626
Vc4Ttp_RNC Peg Counts	4626
PERLENSEC	4626
PERLENSEC_K	4627
pmVcBbe	4627
pmVcEs	4627
pmVcSes	4627
pmVcUas	4628
RNC_RELEASE	4628
VclTp_NodeB Primitive Calculations	4628
Avr_CellRate_Recieved_VclTp_NodeB	4629
Avr_CellRate_Transmitted_VclTp_NodeB	4629
GRAPHmultiLineSeparator	4629
NUMDAYS	4629
NUMHOURS	4629
VclTp_NodeB Peg Counts	4629
NodeB_RELEASE	4629
PERLENSEC	4630
PERLENSEC_K	4630
pmBwUtilizationRx_00	4630
pmBwUtilizationRx_01	4631

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmBwUtilizationRx_02	4631
pmBwUtilizationRx_03	4632
pmBwUtilizationRx_04	4632
pmBwUtilizationRx_05	4632
pmBwUtilizationRx_06	4633
pmBwUtilizationRx_07	4633
pmBwUtilizationRx_08	4634
pmBwUtilizationRx_09	4634
pmBwUtilizationRx_10	4634
pmBwUtilizationRx_11	4635
pmBwUtilizationRx_12	4635
pmBwUtilizationRx_13	4636
pmBwUtilizationRx_14	4636
pmBwUtilizationRx_15	4636
pmBwUtilizationRx_16	4637
pmBwUtilizationRx_17	4637
pmBwUtilizationRx_18	4638
pmBwUtilizationRx_19	4638
pmBwUtilizationRx_20	4638
pmBwUtilizationTx_00	4639
pmBwUtilizationTx_01	4639
pmBwUtilizationTx_02	4640
pmBwUtilizationTx_03	4640
pmBwUtilizationTx_04	4640
pmBwUtilizationTx_05	4641
pmBwUtilizationTx_06	4641
pmBwUtilizationTx_07	4642
pmBwUtilizationTx_08	4642
pmBwUtilizationTx_09	4642
pmBwUtilizationTx_10	4643
pmBwUtilizationTx_11	4643
pmBwUtilizationTx_12	4644
pmBwUtilizationTx_13	4644
pmBwUtilizationTx_14	4644
pmBwUtilizationTx_15	4645
pmBwUtilizationTx_16	4645
pmBwUtilizationTx_17	4646
pmBwUtilizationTx_18	4646
pmBwUtilizationTx_19	4646
pmBwUtilizationTx_20	4647
pmReceivedAtmCells	4647
pmTransmittedAtmCells	4647
VclTp_RNC Primitive Calculations	4648
Avr_CellRate_Recieved_VclTp_RNC	4648
Avr_CellRate_Transmitted_VclTp_RNC	4648
GRAPHmultiLineSeparator	4648
NUMDAYS	4648
NUMHOURS	4648
VclTp_RNC Peg Counts	4649
PERLENSEC	4649
PERLENSEC_K	4649

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

pmBwUtilizationRx_00	4649
pmBwUtilizationRx_01	4650
pmBwUtilizationRx_02	4650
pmBwUtilizationRx_03	4651
pmBwUtilizationRx_04	4651
pmBwUtilizationRx_05	4651
pmBwUtilizationRx_06	4652
pmBwUtilizationRx_07	4652
pmBwUtilizationRx_08	4653
pmBwUtilizationRx_09	4653
pmBwUtilizationRx_10	4653
pmBwUtilizationRx_11	4654
pmBwUtilizationRx_12	4654
pmBwUtilizationRx_13	4655
pmBwUtilizationRx_14	4655
pmBwUtilizationRx_15	4655
pmBwUtilizationRx_16	4656
pmBwUtilizationRx_17	4656
pmBwUtilizationRx_18	4657
pmBwUtilizationRx_19	4657
pmBwUtilizationRx_20	4657
pmBwUtilizationTx_00	4658
pmBwUtilizationTx_01	4658
pmBwUtilizationTx_02	4659
pmBwUtilizationTx_03	4659
pmBwUtilizationTx_04	4659
pmBwUtilizationTx_05	4660
pmBwUtilizationTx_06	4660
pmBwUtilizationTx_07	4661
pmBwUtilizationTx_08	4661
pmBwUtilizationTx_09	4661
pmBwUtilizationTx_10	4662
pmBwUtilizationTx_11	4662
pmBwUtilizationTx_12	4663
pmBwUtilizationTx_13	4663
pmBwUtilizationTx_14	4663
pmBwUtilizationTx_15	4664
pmBwUtilizationTx_16	4664
pmBwUtilizationTx_17	4665
pmBwUtilizationTx_18	4665
pmBwUtilizationTx_19	4665
pmBwUtilizationTx_20	4666
pmReceivedAtmCells	4666
pmTransmittedAtmCells	4666
RNC_RELEASE	4667
VpcTp_NodeB Primitive Calculations	4667
GRAPHmultiLineSeparator	4667
NUMDAYS	4667
NUMHOURS	4667
VpcTp_NodeB Peg Counts	4668
NodeB_RELEASE	4668

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

PERLENSEC	4668
PERLENSEC_K	4668
pmBwErrBlocks	4669
pmBwLostCells	4669
pmBwMissinsCells	4669
pmFwErrBlocks	4669
pmFwLostCells	4670
pmFwMissinsCells	4670
pmLostBrCells	4670
pmLostFpmCells	4671
VpcTp_RNC Primitive Calculations	4671
GRAPHmultiLineSeparator	4671
NUMDAYS	4671
NUMHOURS	4671
VpcTp_RNC Peg Counts	4672
PERLENSEC	4672
PERLENSEC_K	4672
pmBwErrBlocks	4672
pmBwLostCells	4673
pmBwMissinsCells	4673
pmFwErrBlocks	4673
pmFwLostCells	4674
pmFwMissinsCells	4674
pmLostBrCells	4674
pmLostFpmCells	4674
RNC_RELEASE	4675
VplTp_NodeB Primitive Calculations	4675
Avr_CellRate_Recieved_VplTp_NodeB	4675
Avr_CellRate_Transmitted_VplTp_NodeB	4675
GRAPHmultiLineSeparator	4675
NUMDAYS	4676
NUMHOURS	4676
VplTp_NodeB Peg Counts	4676
NodeB_RELEASE	4676
PERLENSEC	4676
PERLENSEC_K	4676
pmReceivedAtmCells	4677
pmTransmittedAtmCells	4677
VplTp_RNC Primitive Calculations	4677
Avr_CellRate_Recieved_VplTp_RNC	4677
Avr_CellRate_Transmitted_VplTp_RNC	4678
GRAPHmultiLineSeparator	4678
NUMDAYS	4678
NUMHOURS	4678
VplTp_RNC Peg Counts	4678
PERLENSEC	4678
PERLENSEC_K	4679
pmReceivedAtmCells	4679
pmTransmittedAtmCells	4679
RNC_RELEASE	4680

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Vt15Ttp_NodeB Primitive Calculations	4680
GRAPHmultiLineSeparator	4680
NUMDAYS	4680
NUMHOURS	4680
Vt15Ttp_NodeB Peg Counts	4680
NodeB_RELEASE	4680
PERLENSEC	4681
PERLENSEC_K	4681
pmEs	4681
pmSes	4682
pmUas	4682
Vt15Ttp_RNC Primitive Calculations	4682
GRAPHmultiLineSeparator	4682
NUMDAYS	4683
NUMHOURS	4683
Vt15Ttp_RNC Peg Counts	4683
PERLENSEC	4683
PERLENSEC_K	4683
pmEs	4683
pmSes	4684
pmUas	4684
RNC_RELEASE	4684

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

1 About This Documentation

The *Performance Data Reference* provides a reference of performance data and fields to use in Prospect® software to create reports. This guide is customized to support Prospect 8.0 (Release 8.0.4) for Ericsson GSM/GPRS/UMTS (Release Point 13).

This guide was last updated 07 January 2008.

Please see the current release notes on this product for a list of revision dates for all Prospect publications.

Audience

This guide is intended for technicians and engineers who use the Prospect software to manage and analyze the performance of a telecommunication network.

Required Skills and Knowledge

This guide is intended for users who have knowledge and skills in the following:

- Basics of Windows
- Features and functions of Microsoft Excel
- High school level mathematics
- Basic statistics
- The network from which Prospect software receives data

Document Conventions

This document uses the typographical conventions shown in the following table:

Table 1: General Document Conventions

<i>Format</i>	<i>Examples</i>	<i>Description</i>
ALL UPPERCASE	<ul style="list-style-type: none">• GPS• NULL• MYWEBSEVER	Acronyms, device names, logical operators, registry keys, and some data structures.
<u>Underscore</u>	See Document Conventions	For links within a document or to the Internet. Note that TOC and index links are not underscored. Color of text is determined by browser settings.
Bold	<ul style="list-style-type: none">• Note: The busy hour determiner is...	Heading text for Notes, Tips, and Warnings.
SMALL CAPS	<ul style="list-style-type: none">• The STORED SQL dialog box...• ...click VIEW...• In the main GUI window, select the FILE menu, point to NEW, and then select TRAFFIC TEMPLATE.	Any text that appears on the GUI.
<i>Italic</i>	<ul style="list-style-type: none">• A <i>busy hour</i> is...• A web server <i>must</i> be installed...• See the <i>User Guide</i>	New terms, emphasis, and book titles.
Monospace	<ul style="list-style-type: none">• <code>./wminstall</code>• <code>\$ cd /cdrom/cdrom0</code>• <code>/xml/dict</code>• <code>http://java.sun.com/products/</code>• <code>addmsc.sh</code>• <code>core.spec</code>• Type OK to continue.	Code text, command line text, paths, scripts, and file names. Text written in the body of a paragraph that the user is expected to enter.
Monospace Bold	<pre>[root] # pkginfo grep -i perl system Perl5 On-Line Manual Pages system Perl 5.6.1 (POD Documenta- tion) system Perl 5.6.1</pre>	For contrast in a code example to show lines the user is expected to enter.
<Mono- space italics>	<pre># cd <oracle_setup></pre>	Used in code examples: command-line variables that you replace with a real name or value. These are always marked with arrow brackets.
[square bracket]	<pre>log-archiver.sh [-i] [-w] [-t]</pre>	Used in code examples: indicates options.

User Publications

Prospect software provides the following user publications in HTML or Adobe Portable Document Format (PDF) formats.

Table 2: Prospect User Documentation

<i>Document</i>	<i>Description</i>
<i>Administration Guide</i>	Helps an administrator configure and support Prospect core server software to analyze network performance and perform other network or database management tasks.
<i>Administrator's Quick Reference Card</i>	Presents the principal tasks of a Prospect core server administrator in an easy-to-use format.
<i>Expressions Technical Reference</i>	Provides detailed information about expressions used in special calculations for reports.
<i>Installation Guide</i>	Instructions for installing and configuring the Prospect software.
<i>Open Interface API Guide</i>	Describes how the Open Interface tool enhances your access to information about database peg counts and scenarios.
<i>Performance Data Reference</i>	Provides detailed information including entity hierarchies, peg counts, primitive calculations, and forecast expressions specific to your organization.
<i>Release Notes</i>	Provides technology-specific and late-breaking information about a given Prospect release and important details about installation and operation.
<i>Server Preparation Guide</i>	Provides instructions for installing and setting up Solaris and Oracle software before you install Prospect software.
<i>Server Sizing Tool Guide</i>	Helps an administrator use the sizing tool to calculate the system space needed for the Prospect software and database.
<i>User Guide</i>	Provides conceptual information and procedures for using Prospect software for performance and trending analysis.

Viewing the Desktop Client Help Publications

To view the desktop client Help publications, select a guide from the HELP menu of the Prospect graphical user interface or press F1 for context-sensitive Help. To update the Help files, click the HELP menu on the Prospect Explorer, and select UPDATE ALL HELP FILES.

When Help files are updated, they are downloaded automatically from the Prospect server to the Prospect client. A message box notifies you when this download occurs.

Viewing the Publications in PDF

All of the user publications are available in Adobe Portable Document Format (PDF). To open a PDF, you need the Adobe Acrobat Reader. You can download Adobe Acrobat Reader free of charge from the Adobe Web site. For more details about the Acrobat Reader, see the Adobe Web site <http://www.adobe.com/>.

Training and Technical Support

Both training and technical support are available for Prospect software. For technical support, contact us at prospect@us.ibm.com. For training, contact us at training@vallent.com.

For more information on product training courses, contact your delivery management team at:

- Americas: tivamedu@us.ibm.com
- Asia Pacific: tivtrainingap@au1.ibm.com
- EMEA: tived@uk.ibm.com

2 Introduction

This reference contains detailed technical information about Prospect®. The information included in this document includes the following:

- Entity descriptions and reporting hierarchy
- System-defined fields
- Reference of possible Prospect Expressions in primitive calculations

This reference lists most fields that you can include in reports. The fields listed in this reference are system-defined fields and do not reflect the complete list of available fields. Additional fields, such as User-Defined Calculations (UDCs) or External fields, may also be available.

The following table describes the field types in this reference.

Table 1: Field Types

<i>Field Type</i>	<i>Description</i>
Data availability	Data availability fields are automatically created for each data file type that is loaded.
Peg count	A performance metric gathered from the wireless network.
Primitive calculation	A performance metric whose value is determined by a set calculation. Some primitive calculations use Prospect expressions. For more information on Prospect expressions, see the <i>Expressions Technical Reference</i> .
Roll-up field	Roll-up fields provide aggregated information about a field defined at a child entity level.

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

3 MSC Traffic Entities

The following figures show the Prospect reporting hierarchy for traffic entities.

Figure 1: Reporting Hierarchy


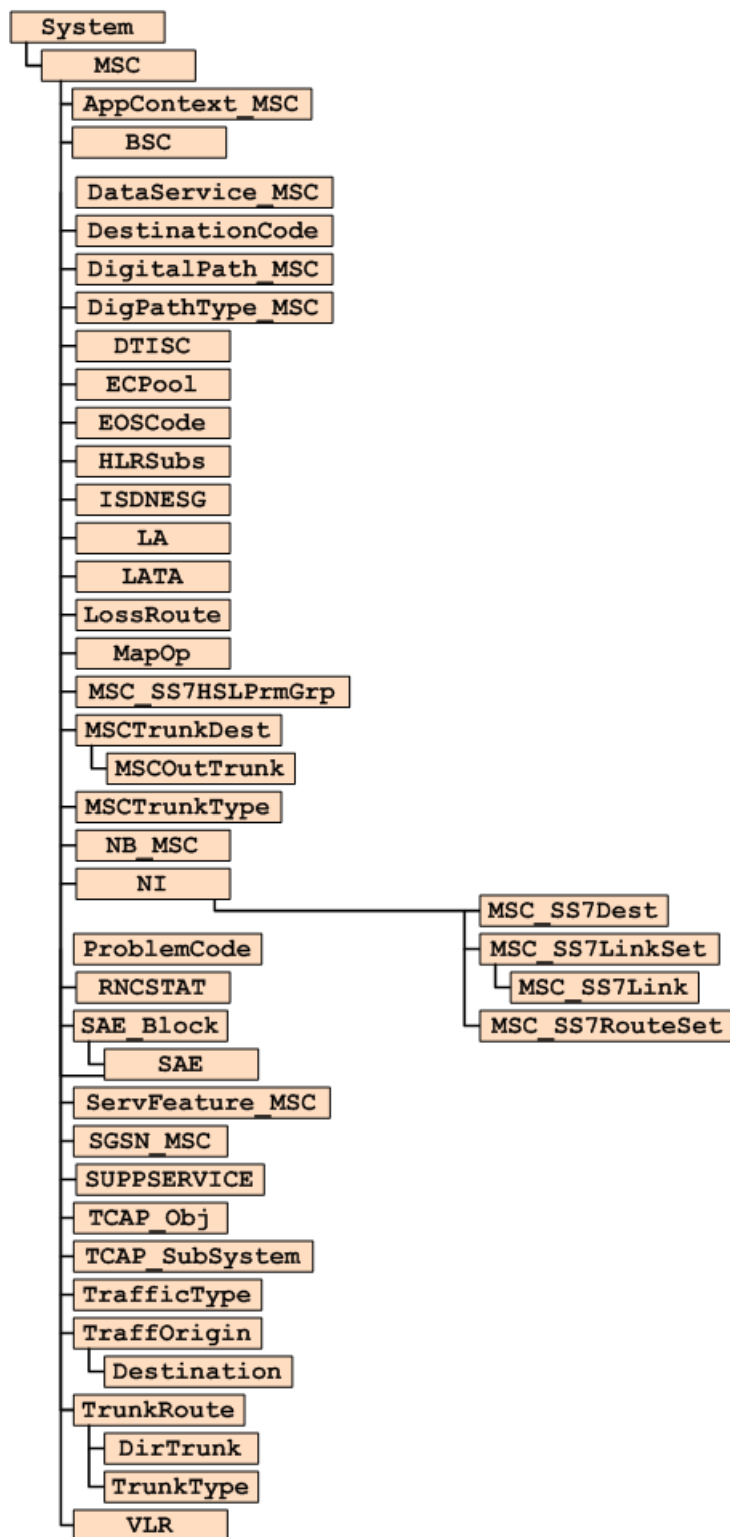


Figure 2: Reporting Hierarchy

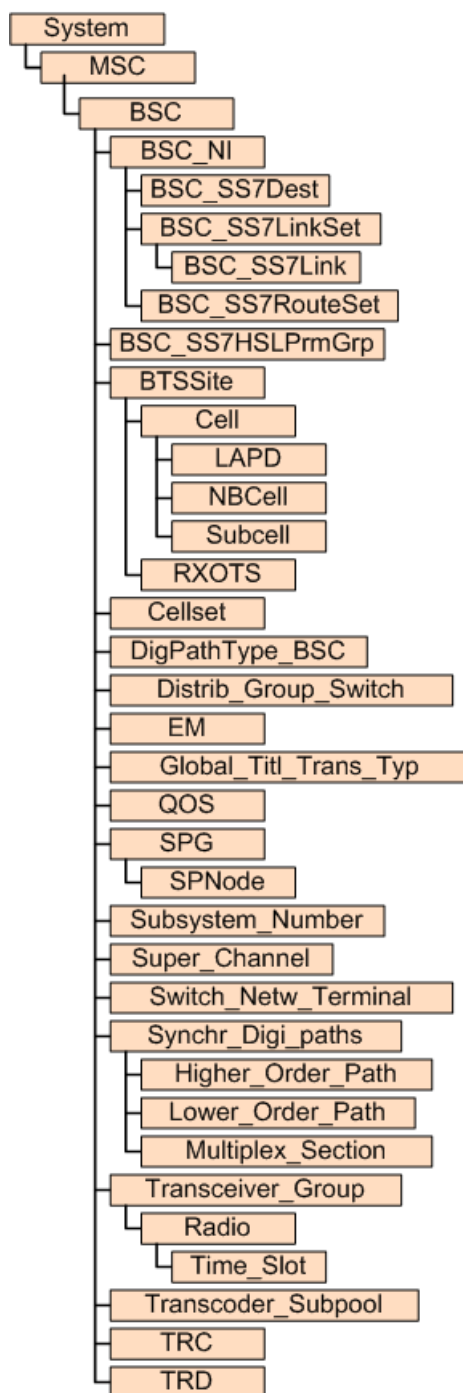

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

4 MSC Traffic Fields

The following is a list of available Traffic performance data fields.

AppContext_MSC Primitive Calculations

The following is a list of primitive calculations for the AppContext_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

AppContext_MSC Peg Counts

The following is a list of peg counts for the AppContext_MSC entity.

NFB3TO1TOT

Number of fall backs for an application context MAP V3 to MAP V2

NFB3TO2TOT

Number of fall backs for an application context MAP V3 to MAP V2

NFBACTOT

Number of fall-backs for a specific AC

BSC Primitive Calculations

The following is a list of primitive calculations for the BSC entity.

Alloc_Fail

Preemption, No of failed PDCH allocations due to no PCU resources

Calculation

ALLPDCHPCUFAIL

CP_LOAD%

CP load on average

Calculation

ACCLOAD / (1.0 * NSCAN)

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

INTERVALS_MSC

Number of 60 minute intervals covered (from BSC objects in MSC data)

Calculation

PERLEN_MSC / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PROC_LOAD%

BSC processor load

Calculation

CP_LOAD%

TCH_Traffic

Traffic in Erlangs

Calculation

```
protect (sum (BTSSite.Cell, TFTRALACC / (1.0 * TFNSCAN_CELTCHF) * PERLEN /  
60.0))
```

TCH_Traffic_BH

Traffic in Erlangs

Calculation

```
protect (sum (BTSSite.Cell, TFTRALACC / (1.0 * TFNSCAN_CELTCHF) * PERLEN /  
60.0))
```

VENDORTECH

Vendor Technology

Calculation

```
isNull ( PERLEN ) ? nullString() : "EricssonGSM"
```

BSC Peg Counts

The following is a list of peg counts for the BSC entity.

ABLLOL

Number of RP's in blocking state, aut. blocked

Data Source

BSC_IQG20_APG40

Source Field

ABLLOL

Source Section

RP

ABORT

Number of 08.71 ABORT messages sent to the SMLC.

Data Source

BSC_IQG20_APG40

Source Field

ABORT

Source Section

BSCPOS

ACCLOAD

Accumulated Processor Load in percent

Data Source

BSC_IQG20_APG40

Source Field

ACCLOAD

Source Section

LOAS

ALLPDCHPCUATT

Number of attempts to allocate PCU resources for PDCHs.

Data Source

BSC_IOG20_APG40

Source Field

ALLPDCHPCUATT

Source Section

BSCGPRS

ALLPDCHPCUFAIL

Cumulative number of failed PDCH (Packet Data Channel) due to no PCU (Packet Control Unit).

Data Source

BSC_IOG20_APG40

Source Field

ALLPDCHPCUFAIL

Source Section

BSCGPRS

AQMDELIVDATA

Total amount of data delivered by AQM in Kbit. This is generated per BSC.

Data Source

BSC_IOG20_APG40

Source Field

AQMDELIVDATA

Source Section

BSCGPRS

AQMRECDATA

Total amount of data received by AQM in Kbit. This is generated per BSC.

Data Source

BSC_IOG20_APG40

Source Field

AQMRECDATA

Source Section

BSCGPRS

BLOL

Number of blocked Ems

Data Source

BSC_IOG20_APG40

Source Field

BLOL

Source Section

EM

BLOL_RP

Number of blocked EMRPs. (Extension Module Regional Processor)

Data Source

BSC_IOG20_APG40

Source Field

BLOL

Source Section

EMRP

BLOLCLM_BSC

Number of blocked CLMs (blocking level)

Data Source

BSC_IOG20_APG40

Source Field

BLOLCLM

Source Section

GRPSWITCH

BLOLSPM_BSC

Number of blocked SPMs (blocking level) in both planes

Data Source

BSC_IQG20_APG40

Source Field

BLOLSPM

Source Section

GRPSWITCH

BLOLSPMA_BSC

Number of blocked SPMs (blocking level) in the A-plane

Data Source

BSC_IQG20_APG40

Source Field

BLOLSPMA

Source Section

GRPSWITCH

BLOLSPMB_BSC

Number of blocked SPMs (blocking level) in the B-plane

Data Source

BSC_IQG20_APG40

Source Field

BLOLSPMB

Source Section

GRPSWITCH

BLOLTSM_BSC

Number of blocked TSMs (blocking level) in both planes

Data Source

BSC_IQG20_APG40

Source Field

BLOLTSM

Source Section

GRPSWITCH

BLOLTSM_A_BSC

Number of blocked TSMs (blocking level) in the A-plane

Data Source

BSC_IQG20_APG40

Source Field

BLOLTSM_A

Source Section

GRPSWITCH

BLOLTSM_B_BSC

Number of blocked TSMs (blocking level) in the B-plane.

Data Source

BSC_IQG20_APG40

Source Field

BLOLTSM_B

Source Section

GRPSWITCH

BSCCUMMS

Cumulative number of MS sessions in the BSC

Data Source

BSC_IOG20_APG40

Source Field

BSCCUMMS

Source Section

BSC

BSCMAXMS

Number of ongoing MS sessions in the BSC

Data Source

BSC_IOG20_APG40

Source Field

BSCMAXMS

Source Section

BSC

BSS_RELEASE

Release

BUFFRS

Number of in-service buffers (TB&RTB)

Data Source

BSC_IOG20_APG40

Source Field

BUFFRS

Source Section

SS7TOTAL2

C7ROUTECNT

Number of occurrences of MSU discarded due to a routing data error

Data Source

BSC_IQG20_APG40

Source Field

C7ROUTECNT

Source Section

C7RTTOTAL

CONNSECT

Total number of simultaneous connection sections

Data Source

BSC_IQG20_APG40

Source Field

CONNSECT

Source Section

C7SCCPUSE

COREQSEG

Originating messages requiring segmentation. (connection oriented SCCP service)

Data Source

BSC_IQG20_APG40

Source Field

COREQSEG

Source Section

SS7SCQOS

CREFREC

Counter for CREF messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

CREFREC

Source Section

C7SCQOS

CREFSENT

Counter for CREF messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

CREFSENT

Source Section

C7SCQOS

CRREC

Counter for CR messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

CRREC

Source Section

C7SCQOS

CRSENT

Counter for CR messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

CRSENT

Source Section

C7SCQOS

CSEGRESF

Number of Segmentation-Reassembly errors.

Data Source

BSC_IQG20_APG40

Source Field

CSEGRESF

Source Section

SS7SCCPUSE

DELRELDLTBF

Tot nr of TBF for which the release is delayed. This counter shall only be triggered once per TBF.

Data Source

BSC_IQG20_APG40

Source Field

DELRELDLTBF

Source Section

BSCGPRS

DELRELTONRM

Nr of TBF in that resumes normal operation. This counter shall only be triggered once per TBF.

Data Source

BSC_IQG20_APG40

Source Field

DELRELTONRM

Source Section

BSCGPRS

DISCDL

Discarded PCU frames downlink for each PCU

Data Source

BSC_IQG20_APG40

Source Field

DISCDL

Source Section

BSCGPRS

DISCUL

Discarded PCU frames uplink for each PCU

Data Source

BSC_IQG20_APG40

Source Field

DISCUL

Source Section

BSCGPRS

DMSU_BSC

Number of discarded MSU's

Data Source

BSC_IQG20_APG40

Source Field

DMSU

Source Section

SS7TOTAL

DSIF_BSC

Number of discarded MSU's octets

Data Source

BSC_IQG20_APG40

Source Field

DSIF

Source Section

SS7TOTAL

ECTMCTMSD

Number of successful initial channel assignments when CTM text telephony is requested by the MS and a CTM circuit is seized

Data Source

MSC_IQG20_APG40

Source Field

ECTMCTMSD

Source Section

BSCSTAT2

ECTMMSNOT

Number of successful initial channel assignments when CTM text telephony is not requested by the MS but a CTM circuit is seized

Data Source

MSC_IQG20_APG40

Source Field

ECTMMSNOT

Source Section

BSCSTAT2

ECTMMSSUP

Number of initial channel assignments when text telephony is requested by the MS

Data Source

MSC_IQG20_APG40

Source Field

ECTMMSSUP

Source Section

BSCSTAT2

ECTMNCTMSD

Number of successful initial channel assignments when CTM text telephony is requested by the MS but a non-CTM circuit is seized

Data Source

MSC_IQG20_APG40

Source Field

ECTMNCTMSD

Source Section

BSCSTAT2

ERRREC

Counter for ERR messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

ERRREC

Source Section

C7SCQOS

ERRSENT

Counter for ERR messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

ERRSENT

Source Section

C7SCQOS

ESUDLTBF

Tot nr of TBF set up in 'Early Set-up of DL TBF mode'.

Data Source

BSC_IQG20_APG40

Source Field

ESUDLTBF

Source Section

BSCGPRS

ESUTONRM

nr of TBF in 'Early Set-up of DL TBF mode' that enters normal operation

Data Source

BSC_IQG20_APG40

Source Field

ESUTONRM

Source Section

BSCGPRS

EXULNRM

Nr of UL TBFs in the BSC entering the that resumes normal operation. This counter shall only be triggered once per TBF.

Data Source

BSC_IOG20_APG40

Source Field

EXULNRM

Source Section

BSCGPRS

EXULTIP

Tot nr of UL TBFs in the BSC entering the .This counter shall only be triggered once per TBF.

Data Source

BSC_IOG20_APG40

Source Field

EXULTIP

Source Section

BSCGPRS

FAILMOVECELL

Number of times a cell relocation attempt is failed

Data Source

BSC_IOG20_APG40

Source Field

FAILMOVECELL

Source Section

BSCGPRS

FRV1UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Full Rate Version 1.

Data Source

BSC_IQG20_APG40

Source Field

FRV1UNATT

Source Section

TRAPCOM

FRV2UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Full Rate Version 2.

Data Source

BSC_IQG20_APG40

Source Field

FRV2UNATT

Source Section

TRAPCOM

FRV3UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Full Rate Version 3.

Data Source

BSC_IQG20_APG40

Source Field

FRV3UNATT

Source Section

TRAPCOM

FTDTCAP

Number of capacity requests for low priority TCAP messages fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

FTDTCAP

Source Section

LOAS

G2GPH0040LOAD

Total number of scans where the GARP-2 load was between 0% and 40%

Data Source

BSC_APG40

Source Field

G2GPH0040LOAD

Source Section

BSCGPRS2

G2GPH4160LOAD

Total number of scans where the GARP-2 load was between 41% and 60%

Data Source

BSC_APG40

Source Field

G2GPH4160LOAD

Source Section

BSCGPRS2

G2GPH6180LOAD

Total number of scans where the GARP-2 load was between 61% and 80%

Data Source

BSC_APG40

Source Field

G2GPH6180LOAD

Source Section

BSCGPRS2

G2GPH8190LOAD

Total number of scans where the GARP-2 load was between 81% and 90%

Data Source

BSC_APG40

Source Field

G2GPH8190LOAD

Source Section

BSCGPRS2

G2GPH9100LOAD

Total number of scans where the GARP-2 load was between 91% and 100%

Data Source

BSC_APG40

Source Field

G2GPH9100LOAD

Source Section

BSCGPRS2

G2TRH0040LOAD

Counts the total number of scans where the GARP-2 load was between 0% and 40%

Data Source

BSC_APG40

Source Field

G2TRH0040LOAD

Source Section

TRH

G2TRH4160LOAD

Counts the total number of scans where the GARP-2 load was between 41% and 60%.

Data Source

BSC_APG40

Source Field

G2TRH4160LOAD

Source Section

TRH

G2TRH6180LOAD

Counts the total number of scans where the GARP-2 load was between 61% and 80%.

Data Source

BSC_APG40

Source Field

G2TRH6180LOAD

Source Section

TRH

G2TRH8190LOAD

Counts the total number of scans where the GARP-2 load was between 81% and 90%.

Data Source

BSC_APG40

Source Field

G2TRH8190LOAD

Source Section

TRH

G2TRH9100LOAD

Counts the total number of scans where the GARP-2 load was between 91% and 100%.

Data Source

BSC_APG40

Source Field

G2TRH9100LOAD

Source Section

TRH

GSL0040

Tot nr of scans where fraction (maximum GSL devices possible to use) is between 0% and 40%.

Data Source

BSC_IQG20_APG40

Source Field

GSL0040

Source Section

BSCGPRS

GSL4160

Tot nr of scans where fraction (maximum GSL devices possible to use) is between 41% and 60%.

Data Source

BSC_IQG20_APG40

Source Field

GSL4160

Source Section

BSCGPRS

GSL6180

Tot nr of scans where fraction (maximum GSL devices possible to use) is between 61% and 80%.

Data Source

BSC_IQG20_APG40

Source Field

GSL6180

Source Section

BSCGPRS

GSL8190

Tot nr of scans where fraction (maximum GSL devices possible to use) is between 81% and 490%.

Data Source

BSC_IQG20_APG40

Source Field

GSL8190

Source Section

BSCGPRS

GSL9100

Tot nr of scans where fraction (maximum GSL devices possible to use) is between 91% and 100%.

Data Source

BSC_IQG20_APG40

Source Field

GSL9100

Source Section

BSCGPRS

GSLMAX

Accumulated nr of maximum GSL 16 kbit/s devices possible to use, calculated at each scan

Data Source

BSC_IQG20_APG40

Source Field

GSLMAX

Source Section

BSCGPRS

GSLSCAN

Tot nr of scans of the PCU taken in relation to the GSL device utilisation.

Data Source

BSC_IQG20_APG40

Source Field

GSLSCAN

Source Section

BSCGPRS

GSLSSCAN

Total number of scans of the GSL Device utilization counters.

Data Source

BSC_IQG20_APG40

Source Field

GSLSSCAN

Source Section

BSCGPRS

GSLUTIL

Accumulated nr of maximum GSL devices possible to use, fractions calculated for each scan.

Data Source

BSC_IQG20_APG40

Source Field

GSLUTIL

Source Section

BSCGPRS

GSM1800CUMMS

Cumulative number of MS sessions in the BSC in GSM 1800 system

Data Source

BSC_IQG20_APG40

Source Field

GSM1800CUMMS

Source Section

BSC

GSM1800MAXMS

Number of ongoing MS sessions in the BSC in GSM 1800 system

Data Source

BSC_IQG20_APG40

Source Field

GSM1800MAXMS

Source Section

BSC

GSM400CUMMS

Cumulative number of MS sessions in the BSC in GSM 400 system

Data Source

BSC_IOG20_APG40

Source Field

GSM400CUMMS

Source Section

BSC

GSM400MAXMS

Number of ongoing MS sessions in the BSC in GSM 400 system

Data Source

BSC_IOG20_APG40

Source Field

GSM400MAXMS

Source Section

BSC

GSM800CUMMS

Cumulative number of MS sessions in the BSC in GSM 800 system

Data Source

BSC_IOG20_APG40

Source Field

GSM800CUMMS

Source Section

BSC

GSM800MAXMS

Number of ongoing MS sessions in the BSC in GSM 800 system

Data Source

BSC_IQG20_APG40

Source Field

GSM800MAXMS

Source Section

BSC

GSM900CUMMS

Cumulative number of MS sessions in the BSC in GSM 900 system

Data Source

BSC_IQG20_APG40

Source Field

GSM900CUMMS

Source Section

BSC

GSM900MAXMS

Number of ongoing MS sessions in the BSC in GSM 900 system

Data Source

BSC_IQG20_APG40

Source Field

GSM900MAXMS

Source Section

BSC

HLSCGREL

Number of attempted SCGR relocations caused by 'high' load

Data Source

BSC_APG40

Source Field

HLSCGREL

Source Section

PGWLDIST

HRV1UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Half Rate Version 1.

Data Source

BSC_IQG20_APG40

Source Field

HRV1UNATT

Source Section

TRAPCOM

HRV2UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Half Rate Version 2.

Data Source

BSC_IQG20_APG40

Source Field

HRV2UNATT

Source Section

TRAPCOM

HRV3UNATT

Unsuccessful Transcoder Resource Allocation Attempts, Half Rate Version 3.

Data Source

BSC_IQG20_APG40

Source Field

HRV3UNATT

Source Section

TRAPCOM

IMSU_BSC

Number of incoming MSU's

Data Source

BSC_IOG20_APG40

Source Field

IMSU

Source Section

SS7TOTAL

ISIF_BSC

Number of incoming SIF octets

Data Source

BSC_IOG20_APG40

Source Field

ISIF

Source Section

SS7TOTAL

LCCELLMOV

Number of succeeded cell move attempt by PCU Load Control

Data Source

BSC_IOG20_APG40

Source Field

LCCELLMOV

Source Section

GPHLOADREG

LCCELLMOVREJ

Number of failed cell move attempts by PCU Load Control due to lack of RPP candidates with low load (only valid for force move of cell).

Data Source

BSC_IQG20_APG40

Source Field

LCCELLMOVREJ

Source Section

GPHLOADREG

LCHIRPPLOAD

Increased at every 500ms interval when in any of the High Load Modes for an RPP.

Data Source

BSC_IQG20_APG40

Source Field

LCHIRPPLOAD

Source Section

GPHLOADREG

LCMSSUPRFC

The time when MS Flow Control has been sent with a reduced bucket size, due to lack of PCU-RP memory. The counter is increased by one every 20th second as long as this action is in use.

Data Source

BSC_IQG20_APG40

Source Field

LCMSSUPRFC

Source Section

GPHLOADREG

LCPARREJ

Number of rejected Packet Access Request per BSC due to lack of RPP memory.

Data Source

BSC_IQG20_APG40

Source Field

LCPARREJ

Source Section

GPHLOADREG

LCRELBUSYHI3

Number of active PDCHs released due to entering High Load Mode.

Data Source

BSC_IQG20_APG40

Source Field

LCRELBUSYHI3

Source Section

GPHLOADREG

LCRELIDLEHI3

Number of idle PDCHs released due to entering High Load Mode 3.

Data Source

BSC_IQG20_APG40

Source Field

LCRELIDLEHI3

Source Section

GPHLOADREG

LINKS

Total number of assigned signalling link.

Data Source

BSC_IOG20_APG40

Source Field

LINKS

Source Section

SS7TOTAL2

LNKSETS

Number of assigned link sets

Data Source

BSC_IOG20_APG40

Source Field

LNKSETS

Source Section

SS7TOTAL2

MSGHAND

Total messages handled from local or remote subsystem

Data Source

BSC_IOG20_APG40

Source Field

MSGHAND

Source Section

C7SCCPUSE

MSGPOL

Counter for syntax error detected

Data Source

BSC_IOG20_APG40

Source Field

MSGPOL

Source Section

C7SCPERF

MSGPOLREJ

Counter for not allowed policed messages

Data Source

BSC_IQG20_APG40

Source Field

MSGPOLREJ

Source Section

C7SCPERF

MSGRCL0

Total messages received for connectionless class 0

Data Source

BSC_IQG20_APG40

Source Field

MSGRCL0

Source Section

C7SCCPUSE

MSGRCL1

Total messages received for connectionless class 1

Data Source

BSC_IQG20_APG40

Source Field

MSGRCL1

Source Section

C7SCCPUSE

MSGRQGT

Counter for messages requiring global title translation

Data Source

BSC_IQG20_APG40

Source Field

MSGRQGT

Source Section

C7SCCPUSE

MSGSCL0

Total messages sent for connectionless class 0

Data Source

BSC_IQG20_APG40

Source Field

MSGSCL0

Source Section

C7SCCPUSE

MSGSCL1

Total messages sent for connectionless class 1

Data Source

BSC_IQG20_APG40

Source Field

MSGSCL1

Source Section

C7SCCPUSE

MSINVDPC_BSC

Number of MSUs discarded due to invalid destination point code

Data Source

BSC_IOG20_APG40

Source Field

MSINVDPC

Source Section

SS7TOTAL

MSINVSIO_BSC

Number of MSUs discarded due to invalid Service Indicator Octet

Data Source

BSC_IOG20_APG40

Source Field

MSINVSIO

Source Section

SS7TOTAL

MTPREST

Number of MTP restarts initiated at the TP/SEP

Data Source

BSC_IOG20_APG40

Source Field

MTPREST

Source Section

SS7TOTAL2

NACCBLOT_BSC

Accumulated system blocking time, in seconds.

Data Source

BSC_IOG20_APG40

Source Field

NACCBLOT

Source Section

CP

NACPCO

nr of PACKET CELL CHANGE ORDER (PCCO) (44.060) messages sent per BSC

Data Source

BSC_IOG20_APG40

Source Field

NACPCO

Source Section

BSCGPRS

NBLOCLMACC_BSC

Accumulated number of blocked CLMs.

Data Source

BSC_IOG20_APG40

Source Field

NBLOCLMACC

Source Section

GRPSWITCH

NBLOL

Number of RP's in blocking state, man. blocked

Data Source

BSC_IOG20_APG40

Source Field

NBLOL

Source Section

RP

NBLOSPMAACC_BSC

Number of blocked SPM's in the A-plane

Data Source

BSC_IQG20_APG40

Source Field

NBLOSPMAACC

Source Section

GRPSWITCH

NBLOSPMACC_BSC

Number of blocked SPM's in both planes

Data Source

BSC_IQG20_APG40

Source Field

NBLOSPMACC

Source Section

GRPSWITCH

NBLOSPMBACC_BSC

Number of blocked SPM's in the B-plane

Data Source

BSC_IQG20_APG40

Source Field

NBLOSPMBACC

Source Section

GRPSWITCH

NBLOTSMAACC_BSC

Accumulated number of blocked TSMs in the A-plane

Data Source

BSC_IQG20_APG40

Source Field

NBLOTSMAACC

Source Section

GRPSWITCH

NBLOTSMACC_BSC

Accumulated number of blocked TSMs in both planes

Data Source

BSC_IQG20_APG40

Source Field

NBLOTSMACC

Source Section

GRPSWITCH

NBLOTSMBACC_BSC

Accumulated number of blocked TSMs in the B-plane

Data Source

BSC_IQG20_APG40

Source Field

NBLOTSMBACC

Source Section

GRPSWITCH

NBSCOINRCVSUCC

Number of successful Location Information Report messages received from the target BSC

Data Source

MSC_IOG20_APG40

Source Field

NBSCOINRCVSUCC

Source Section

BSCSTAT

NBSCOINSNTTOT

Number of sent Connection Oriented Information messages to the target BSC

Data Source

MSC_IOG20_APG40

Source Field

NBSCOINSNTTOT

Source Section

BSCSTAT

NBSDFRFRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual FR and FR assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSDFRFRSUCC

Source Section

BSCSTAT

NBSDFRHSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual FR and HR assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSDFRHSUCC

Source Section

BSCSTAT

NBSDFRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual without preference and FR assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSDFRSUCC

Source Section

BSCSTAT

NBSDFRTOT

initial channel assignments with channel rate and type in 'assignment request' equal to dual FR

Data Source

MSC_IQG20_APG40

Source Field

NBSDFRTOT

Source Section

BSCSTAT

NBSDHRFRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual HR and FR assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSDHRFRSUCC

Source Section

BSCSTAT

NBSDHRHRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual HR and HR assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSDHRHRSUCC

Source Section

BSCSTAT

NBSDHRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to dual without preference and HR assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSDHRSUCC

Source Section

BSCSTAT

NBSDHRTOT

initial channel assignments with channel rate and type in 'assignment request' equal to dual HR

Data Source

MSC_IQG20_APG40

Source Field

NBSDHRTOT

Source Section

BSCSTAT

NBSDTOT

initial channel assignments with channel rate and type in 'assignment request' equal to dual without preference

Data Source

MSC_IQG20_APG40

Source Field

NBSDTOT

Source Section

BSCSTAT

NBSFRFRSUCC

successful initial channel assignments with channel rate and type 'assignment request' equal to FR

Data Source

MSC_IQG20_APG40

Source Field

NBSFRFRSUCC

Source Section

BSCSTAT

NBSFRTOT

initial channel assignments with channel rate and type 'assignment request' equal to FR

Data Source

MSC_IQG20_APG40

Source Field

NBSFRTOT

Source Section

BSCSTAT

NBSFRV1ANPTOT

Number of successful initial channel assignments with speech coder other than FRV1 preferred and FRV1 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV1ANPTOT

Source Section

CODERASGN

NBSFRV1ATOT

Number of successful initial channel assignments with speech coder FRV1 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV1ATOT

Source Section

CODERASGN

NBSFRV1PTOT

Number of initial channel assignments with speech coder FRV1 preferred

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV1PTOT

Source Section

CODERASGN

NBSFRV2ANPTOT

Number of successful initial channel assignments with speech coder other than FRV2 preferred and FRV2 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV2ANPTOT

Source Section

CODERASGN

NBSFRV2ATOT

Number of successful initial channel assignments with speech coder FRV2 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV2ATOT

Source Section

CODERASGN

NBSFRV2PTOT

Number of initial channel assignments with speech coder FRV2 preferred

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV2PTOT

Source Section

CODERASGN

NBSFRV3ANPTOT

Number of successful initial channel assignments with speech coder other than FRV3 preferred and FRV3 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV3ANPTOT

Source Section

CODERASGN

NBSFRV3ATOT

Number of successful initial channel assignments with speech coder FRV3 assigned

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV3ATOT

Source Section

CODERASGN

NBSFRV3PTOT

Number of initial channel assignments with speech coder FRV3 preferred

Data Source

MSC_IQG20_APG40

Source Field

NBSFRV3PTOT

Source Section

CODERASGN

NBSHRHRSUCC

successful initial channel assignments with channel rate and type in 'assignment request' equal to HR

Data Source

MSC_IQG20_APG40

Source Field

NBSHRHRSUCC

Source Section

BSCSTAT

NBSHRTOT

initial channel assignments with channel rate and type in 'assignment request' equal to HR

Data Source

MSC_IQG20_APG40

Source Field

NBSHRTOT

Source Section

BSCSTAT

NBSHRV1ANPTOT

Number of successful initial channel assignments with speech coder other than HRV1 preferred and HRV1 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV1ANPTOT

Source Section

CODERASGN

NBSHRV1ATOT

Number of successful initial channel assignments with speech coder HRV1 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV1ATOT

Source Section

CODERASGN

NBSHRV1PTOT

Number of initial channel assignments with speech coder HRV1 preferred

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV1PTOT

Source Section

CODERASGN

NBSHRV2ANPTOT

Number of successful initial channel assignments with speech coder other than HRV2 preferred and HRV2 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV2ANPTOT

Source Section

CODERASGN

NBSHRV2ATOT

Number of successful initial channel assignments with speech coder HRV2 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV2ATOT

Source Section

CODERASGN

NBSHRV2PTOT

Number of initial channel assignments with speech coder HRV2 preferred

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV2PTOT

Source Section

CODERASGN

NBSHRV3ANPTOT

Number of successful initial channel assignments with speech coder other than HRV3 preferred and HRV3 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV3ANPTOT

Source Section

CODERASGN

NBSHRV3ATOT

Number of successful initial channel assignments with speech coder HRV3 assigned

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV3ATOT

Source Section

CODERASGN

NBSHRV3PTOT

Number of initial channel assignments with speech coder HRV3 preferred

Data Source

MSC_IOG20_APG40

Source Field

NBSHRV3PTOT

Source Section

CODERASGN

NBSLOCINCMDTOT

Number of sent Location Information Command messages to the target BSC

Data Source

MSC_IQG20_APQ40

Source Field

NBSLOCINCMDTOT

Source Section

BSCSTAT

NBSLOCINREPSUCC

Number of successful Location Information Report messages received from the target BSC

Data Source

MSC_IQG20_APQ40

Source Field

NBSLOCINREPSUCC

Source Section

BSCSTAT

NBSMSLSUCC

successful initial channel assignments with channel rate and type in 'assignment request' in a multi-slot configuration

Data Source

MSC_IQG20_APQ40

Source Field

NBSMSLSUCC

Source Section

BSCSTAT

NBSMSLTOT

initial channel assignments with channel rate and type in 'assignment request' in a multi-slot configuration

Data Source

MSC_IQG20_APG40

Source Field

NBSMSLTOT

Source Section

BSCSTAT

NBSOVLSTOT

Number of sent OVERLOAD messages to the BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSOVLSTOT

Source Section

BSCSTAT2

NBSPCHACMTOT

A-interface circuit pool number mismatch at channel assignment completion or handover completion

Data Source

MSC_IQG20_APG40

Source Field

NBSPCHACMTOT

Source Section

BSCSTAT

NBSPCHAFMTOT

channel assignment failures or handover failures due to A-interface circuit pool mismatch reason

Data Source

MSC_IQG20_APG40

Source Field

NBSPCHAFMTOT

Source Section

BSCSTAT

NBSPCHAFSWTOT

channel assignment failures or handover failures due to A-interface switch circuit pool reason

Data Source

MSC_IQG20_APG40

Source Field

NBSPCHAFSWTOT

Source Section

BSCSTAT

NBSPEHNDTOT

external intra-BSS handovers attempted for each BSC for A-interface circuit pool handling reasons

Data Source

MSC_IQG20_APG40

Source Field

NBSPEHNDTOT

Source Section

BSCSTAT

NBSRLOCRESSUCC

Number of successful PERFORM LOCATION RESPONSE messages received from the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSRLOCRESSUCC

Source Section

BSCSTAT2

NBSLOCREQTOT

Number of PERFORM LOCATION REQUEST messages sent to the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSLOCREQTOT

Source Section

BSCSTAT2

NBSIHBSUCC

Number of successful incoming handovers to the BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSIHBSUCC

Source Section

BSCSTAT

NBSTIUGHBSUCC

Number of successful incoming handovers to the BSC during UMTS to GSM handover

Data Source

MSC_IQG20_APQ40

Source Field

NBSTIUGHBSUCC

Source Section

BSCSTAT

NBSTOGUHBSUCC

Number of successful outgoing handover from the BSC

Data Source

MSC_IQG20_APQ40

Source Field

NBSTOGUHBSUCC

Source Section

BSCSTAT2

NBSTOHBSUCC

Number of successful outgoing handovers from the BSC

Data Source

MSC_IQG20_APQ40

Source Field

NBSTOHBSUCC

Source Section

BSCSTAT

NBSTRGUHRTOT

Number of handover required messages received

Data Source

MSC_IQG20_APG40

Source Field

NBSTRGUHRTOT

Source Section

BSCSTAT2

NBSTRHPTOT

Number of successful internal intra-BSS handovers (handover performed)

Data Source

MSC_IQG20_APG40

Source Field

NBSTRHPTOT

Source Section

BSCSTAT

NBSTRHRTOT

Number of received handover required messages

Data Source

MSC_IQG20_APG40

Source Field

NBSTRHRTOT

Source Section

BSCSTAT

NBSTRRMTOT

Number of received reset messages

Data Source

MSC_IQG20_APG40

Source Field

NBSTRMTOT

Source Section

BSCSTAT

NBSTSHRTOT

Number of sent handover request messages to the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSTSHRTOT

Source Section

BSCSTAT

NBSTSMITTOT

Number of sent MSC Invoke Trace messages to the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NBSTSMITTOT

Source Section

BSCSTAT

NBSTSUGHRTOT

Number of handover request messages sent to the target BSC during UMTS to GSM handover (NBSTSUGHRTOT)

Data Source

MSC_IQG20_APG40

Source Field

NBSTSUGHRTOT

Source Section

BSCSTAT

NC2CONF

The number of times per BSC that MSs have sent at least one 44.060 PACKET MEASUREMENT REPORT message after being ordered to enter NC2.

Data Source

BSC_APG40

Source Field

NC2CONF

Source Section

BSCGPRS2

NC2ORDER

The number of times per BSC that MSs were ordered to NC2 and remained in NC2 long enough to be given the opportunity to send at least one 44.060 PACKET MEASUREMENT REPORT message.

Data Source

BSC_APG40

Source Field

NC2ORDER

Source Section

BSCGPRS2

NC2PCO

The number of 44.060 PACKET CELL CHANGE ORDER messages sent per BSC while the MS was in NC2

Data Source

BSC_APG40

Source Field

NC2PCO

Source Section

BSCGPRS2

NCAPREJCNT

Accumulations in requested HLR

Data Source

BSC_IQG20_APG40

Source Field

NCAPREJCNT

Source Section

LOAS

NCAPREQCNT

Number of Processor capacity requested in HLR

Data Source

BSC_IQG20_APG40

Source Field

NCAPREQCNT

Source Section

LOAS

NCLM_BSC

Number of CLMs

Data Source

BSC_IQG20_APG40

Source Field

NCLM

Source Section

GRPSWITCH

NCPABLOT_BSC

Accumulated time of blocked CP-unit, automatically blocked, in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NCPABLOT

Source Section

CP

NCPMBLOT_BSC

Accumulated time of blocked CP-unit, manually blocked, in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NCPMBLOT

Source Section

CP

NEM

Number of Ems(Extension Modules).

Data Source

BSC_IQG20_APG40

Source Field

NEM

Source Section

EM

NEMG

Number of EMGs.(Extension Module Group)

Data Source

BSC_IOG20_APG40

Source Field

NEMG

Source Section

EMG

NEMRP

Number of EMRPs. (Extension Module Regional Processor)

Data Source

BSC_IOG20_APG40

Source Field

NEMRP

Source Section

EMRP

NFORLAPT_BSC

Number of forlopps aborted by APT.

Data Source

BSC_IOG20_APG40

Source Field

NFORLAPT

Source Section

CP

NFORLAPZ_BSC

Number of forlopps aborted by APZ.

Data Source

BSC_IOG20_APG40

Source Field

NFORLAPZ

Source Section

CP

NFORLMAN_BSC

Number of forlopps aborted manually.

Data Source

BSC_IOG20_APG40

Source Field

NFORLMAN

Source Section

CP

NFTDEMC

originating emergency calls accepted by the block RMSCS

Data Source

BSC_IOG20_APG40

Source Field

NFTDEMC

Source Section

LOADREG

NFTDIEX

Number of incoming external calls fetched from the Exchange Input Load Supervision function.

Data Source

BSC_IOG20_APG40

Source Field

NFTDIEX

Source Section

LOAS

NFTDMHI

emergency calls and packet channel allocation attempts fetched from the Exchange Input Load Supervision Function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMHI

Source Section

LOAS

NFTDMLO

The number of fetched high- and low priority maintenance tasks in Base Level Load Regulation.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMLO

Source Section

LOAS

NFTDMT0

Number of emergency calls fetched from the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT0

Source Section

LOASMISC

NFTDMT1

Number of requests of miscellaneous tasks with priority level one fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT1

Source Section

LOASMISC

NFTDMT10

Number of requests of miscellaneous tasks with priority level 10 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT10

Source Section

LOASMISC

NFTDMT12

Number of fetched System Information tasks due to distribution of circuit switch System Information messages to the BSC.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT12

Source Section

LOASMISC

NFTDMT13

Number of fetched high priority Base Level Load Regulation (BALREG) tasks.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT13

Source Section

LOASMISC

NFTDMT14

Number of fetched low priority BaseLevel Load Regulation (BALREG) tasks.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT14

Source Section

LOASMISC

NFTDMT15

Number of requests of miscellaneous tasks with priority level 15 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT15

Source Section

LOASMISC

NFTDMT2

Number of requests of miscellaneous tasks with priority level 2 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT2

Source Section

LOASMISC

NFTDMT3

Number of requests of miscellaneous tasks with priority level 3 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT3

Source Section

LOASMISC

NFTDMT4

Number of TRA requests to TRC fetched from the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT4

Source Section

LOASMISC

NFTDMT5

Number of requests of miscellaneous tasks with priority level 5 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT5

Source Section

LOASMISC

NFTDMT6

Number of requests of miscellaneous tasks with priority level 6 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT6

Source Section

LOASMISC

NFTDMT7

Number of requests of miscellaneous tasks with priority level 7 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT7

Source Section

LOASMISC

NFTDMT8

Number of requests of miscellaneous tasks with priority level 8 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT8

Source Section

LOASMISC

NFTDMT9

Number of requests of miscellaneous tasks with priority level 9 fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDMT9

Source Section

LOASMISC

NFTDNPRIO_BSC

Number of non-priority originating calls fetched from the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDNPRIO

Source Section

LOAS

NFTDORG

originating calls (emergency calls not included) fetched from the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NFTDORG

Source Section

LOAS

NFTDPRIO_BSC

Number of priority originating calls fetched from the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NFTDPRIO

Source Section

LOAS

NFTDTCAP

Number of accepted processor capacity requests for low priority TCAP messages

Data Source

BSC_IQG20_APG40

Source Field

NFTDTCAP

Source Section

LOAS

NLRGA_BSC

Number of large restarts without reload, automatically initiated.

Data Source

BSC_IQG20_APG40

Source Field

NLRGA

Source Section

CP

NLRGM_BSC

Number of large restarts without reload, manually initiated.

Data Source

BSC_IQG20_APG40

Source Field

NLRGM

Source Section

CP

NMAUABLOT_BSC

Accumulated time of blocked MAU/AMU automatically blocked, in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NMAUABLOT

Source Section

CP

NMAUF_BSC

Number of MAU/AMU faults

Data Source

BSC_IOG20_APG40

Source Field

NMAUF

Source Section

CP

NMAUMBLOT_BSC

Accumulated time of blocked MAU/AMU, manually blocked, in seconds.

Data Source

BSC_IOG20_APG40

Source Field

NMAUMBLOT

Source Section

CP

NNOREC_BSC

Number of prog executions terminated

Data Source

BSC_IOG20_APG40

Source Field

NNOREC

Source Section

CP

NOFFIEX

Number of incoming external calls offered to the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NOFFIEX

Source Section

LOAS

NOFFMHI

emergency calls and packet channel allocation attempts offered to the Exchange Input Load Supervision Function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMHI

Source Section

LOAS

NOFFMLO

The number of offered high- and low priority maintenance tasks in Base Level Load Regulation.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMLO

Source Section

LOAS

NOFFMT0

Number of emergency calls offered to the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT0

Source Section

LOASMISC

NOFFMT1

Number of requests of miscellaneous tasks with priority level one offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT1

Source Section

LOASMISC

NOFFMT10

Number of requests of miscellaneous tasks with priority level 10 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT10

Source Section

LOASMISC

NOFFMT12

Number of offered System Information tasks due to distribution of circuit switch System Information messages to the BSC.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT12

Source Section

LOASMISC

NOFFMT13

Number of offered high priority Base Level Regulation (BALREG) tasks.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT13

Source Section

LOASMISC

NOFFMT14

Number of offered low priority Base Level Regulation (BALREG) tasks.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT14

Source Section

LOASMISC

NOFFMT15

Number of requests of miscellaneous tasks with priority level 15 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT15

Source Section

LOASMISC

NOFFMT2

Number of requests of miscellaneous tasks with priority level 2 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT2

Source Section

LOASMISC

NOFFMT3

Number of requests of miscellaneous tasks with priority level 3 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT3

Source Section

LOASMISC

NOFFMT4

Number of TRA requests to TRC offered to the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT4

Source Section

LOASMISC

NOFFMT5

Number of requests of miscellaneous tasks with priority level 5 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT5

Source Section

LOASMISC

NOFFMT6

Number of requests of miscellaneous tasks with priority level 6 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT6

Source Section

LOASMISC

NOFFMT7

Number of requests of miscellaneous tasks with priority level 7 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT7

Source Section

LOASMISC

NOFFMT8

Number of requests of miscellaneous tasks with priority level 8 offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT8

Source Section

LOASMISC

NOFFMT9

Number of requests of miscellaneous tasks with priority level nine fetched by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFMT9

Source Section

LOASMISC

NOFFNPRIO_BSC

Number of non-priority originating calls offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFNPRIO

Source Section

LOAS

NOFFORG

originating calls offered (emergency calls not included) to the Exchange Input Load Supervision function.

Data Source

BSC_IQG20_APG40

Source Field

NOFFORG

Source Section

LOAS

NOFFPRIO_BSC

Number of priority originating calls offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFPRIO

Source Section

LOAS

NOFFTCAP

Number of processor capacity requests for low priority TCAP messages offered to the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NOFFTCAP

Source Section

LOAS

NPBITF_BSC

Number of permanent bitfaults

Data Source

BSC_IQG20_APG40

Source Field

NPBITF

Source Section

CP

NPCPF_BSC

Number of permanent CP-faults

Data Source

BSC_IQG20_APG40

Source Field

NPCPF

Source Section

CP

NPERMF

Number of permanent faults in RP

Data Source

BSC_IOG20_APG40

Source Field

NPERMF

Source Section

RP

NPERMF_EMG

Number of permanent faults in EMG.(Extension Module Group)

Data Source

BSC_IOG20_APG40

Source Field

NPERMF

Source Section

EMG

NREJEMC

originating emergency calls rejected by the block RMSCS

Data Source

BSC_IOG20_APG40

Source Field

NREJEMC

Source Section

LOADREG

NREJIEX

Number of mobile terminating calls rejected by the Process Load Control in BSC/TRC function

Data Source

BSC_IQG20_APG40

Source Field

NREJIEX

Source Section

LOADREG

NREJNPRIQ

Number of location updates rejected by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NREJNPRIQ

Source Section

LOADREG

NREJORG

originating calls rejected by the block RMSCS

Data Source

BSC_IQG20_APG40

Source Field

NREJORG

Source Section

LOADREG

NREJPCH

packet channel allocation attempts rejected

Data Source

BSC_IQG20_APG40

Source Field

NREJPCH

Source Section

LOADREG

NREJPRIO

Number of normal originating connections rejected by the Processor Load Control function

Data Source

BSC_IQG20_APG40

Source Field

NREJPRIO

Source Section

LOADREG

NRELA_BSC

Number of large restarts with reload, automatically initiated.

Data Source

BSC_IQG20_APG40

Source Field

NRELA

Source Section

CP

NRELM_BSC

Number of large restarts with reload, manually initiated.

Data Source

BSC_IQG20_APG40

Source Field

NRELM

Source Section

CP

NRP

Number of RP's

Data Source

BSC_IQG20_APG40

Source Field

NRP

Source Section

RP

NSCAN

Accumulations

Data Source

BSC_IQG20_APG40

Source Field

NSCAN

Source Section

LOAS

NSCAN_GRPSWITCH_BSC

Number of accumulations.

Data Source

BSC_IQG20_APG40

Source Field

NSCAN

Source Section

GRPSWITCH

NSMLA_BSC

Number of small restarts automatically initiated.

Data Source

BSC_IOG20_APG40

Source Field

NSMLA

Source Section

CP

NSMLM_BSC

Number of small restarts manually initiated.

Data Source

BSC_IOG20_APG40

Source Field

NSMLM

Source Section

CP

NSPM_BSC

Number of SPMs.

Data Source

BSC_IOG20_APG40

Source Field

NSPM

Source Section

GRPSWITCH

NT10SRST

T1.111.4 T10 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

NT10SRST

Source Section

SS7TIMERS

NT11TFRS

T1.111.4 T11 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

NT11TFRS

Source Section

SS7TIMERS

NT12UNAK

T1.111.4 T12 Timer in 100millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT12UNAK

Source Section

SS7TIMERS

NT13FUNH

T1.111.4 T13 Timer in 100millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT13FUNH

Source Section

SS7TIMERS

NT14INAK

T1.111.4 T14 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NT14INAK

Source Section

SS7TIMERS

NT15RSCT

T1.111.4 T15 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NT15RSCT

Source Section

SS7TIMERS

NT16RSCS

T1.111.4 T16 Timer in 100millisecond units.

Data Source

BSC_IQG20_APG40

Source Field

NT16RSCS

Source Section

SS7TIMERS

NT19FLKR

T1.111.4 T19 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NT19FLKR

Source Section

SS7TIMERS

NT1TDCHO

T1.111.4 T1 Timer in 100 millisecond units.

Data Source

BSC_IQG20_APG40

Source Field

NT1TDCHO

Source Section

SS7TIMERS

NT20RLIH

T1.111.4 T20 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

NT20RLIH

Source Section

SS7TIMERS

NT21RRIH

T1.111.4 T21 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

NT21RRIH

Source Section

SS7TIMERS

NT2CHOAK

T1.111.4 T2 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT2CHOAK

Source Section

SS7TIMERS

NT3TDCHB

T1.111.4 T3 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT3TDCHB

Source Section

SS7TIMERS

NT4CHBK1

T1.111.4 T4 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT4CHBK1

Source Section

SS7TIMERS

NT5CHBK2

T1.111.4 T5 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT5CHBK2

Source Section

SS7TIMERS

NT6TDCRR

T1.111.4 T6 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT6TDCRR

Source Section

SS7TIMERS

NT8TRPRH

T1.111.4 T8 Timer in 100 millisecond units.

Data Source

BSC_IOG20_APG40

Source Field

NT8TRPRH

Source Section

SS7TIMERS

NTBITF_BSC

Number of temporary bitfaults

Data Source

BSC_IQG20_APG40

Source Field

NTBITF

Source Section

CP

NTCPF_BSC

Number of temporary CP-faults

Data Source

BSC_IQG20_APG40

Source Field

NTCPF

Source Section

CP

NTEMPF

Number of temporary faults in RP

Data Source

BSC_IQG20_APG40

Source Field

NTEMPF

Source Section

RP

NTSM_BSC

Number of TSMs

Data Source

BSC_IQG20_APG40

Source Field

NTSM

Source Section

GRPSWITCH

OCTRETRN_BSC

Number of octets retransmitted

Data Source

BSC_IQG20_APG40

Source Field

OCTRETRN

Source Section

SS7TOTAL

OMMSU_BSC

Number of originating management MSU's

Data Source

BSC_IQG20_APG40

Source Field

OMMSU

Source Section

SS7TOTAL

OMSIF_BSC

Number of originating management MSU octets

Data Source

BSC_IOG20_APG40

Source Field

OMSIF

Source Section

SS7TOTAL

OUMSU_BSC

Number of originating SCCP/UP MSU's

Data Source

BSC_IOG20_APG40

Source Field

OUMSU

Source Section

SS7TOTAL

OUSIF_BSC

Number of originating SCCP/UP MSU octets

Data Source

BSC_IOG20_APG40

Source Field

OUSIF

Source Section

SS7TOTAL

P95FPHGT_BSC

Number of sampled translated MSUs failing normal-load 95% test for CP handling time

Data Source

BSC_IOG20_APG40

Source Field

P95FPHGT

Source Section

SS7TOTAL

P95FPHNT_BSC

Number of sampled non-translated MSUs failing normal-load 95% test for CP handling time.

Data Source

BSC_IOG20_APG40

Source Field

P95FPHNT

Source Section

SS7TOTAL

PAGCSBSC

Cumulative # PAGING CS messages received from Serving General Packet Radio Services (GPRS) Support Node (SGSN) with paging area set to BSC or Location Area

Data Source

BSC_IOG20_APG40

Source Field

PAGCSBSC

Source Section

BSCGPRS

PAGCSCONG

Cumulative number of PAGING CS messages received from the SGSN that are rejected due to congestion.

Data Source

BSC_IOG20_APG40

Source Field

PAGCSCONG

Source Section

BSCGPRS

PAGPSBSC

Cumulative # PAGING PS messages received from the SGSN with paging area set to the BSC or Location Area.

Data Source

BSC_IOG20_APG40

Source Field

PAGPSBSC

Source Section

BSCGPRS

PAIRABLOL

Number of pair of RP's in blocking state, aut. blocked

Data Source

BSC_IOG20_APG40

Source Field

PAIRABLOL

Source Section

RP

PAIRABLOL1

Number of RP's, in an RP-pair, in blocking state, aut blocked

Data Source

BSC_IOG20_APG40

Source Field

PAIRABLOL1

Source Section

RP

PAIRMBLOL

Number of pair of RP's in blocking state, man. blocked

Data Source

BSC_IOG20_APG40

Source Field

PAIRMBLOL

Source Section

RP

PAIRMBLOL1

Number of RP's, in an RP-pair, in blocking state, man blocked

Data Source

BSC_IOG20_APG40

Source Field

PAIRMBLOL1

Source Section

RP

PBPGW0040LOAD

Number of scans where the PGW-RP CPU Load was between 0% and 40%

Data Source

BSC_APG40

Source Field

PBPGW0040LOAD

Source Section

PGW

PBPGW4160LOAD

Number of scans where the PGW-RP CPU Load was between 41% and 60%

Data Source

BSC_APG40

Source Field

PBPGW4160LOAD

Source Section

PGW

PBPGW6180LOAD

Number of scans where the PGW-RP CPU Load was between 61% and 80%

Data Source

BSC_APG40

Source Field

PBPGW6180LOAD

Source Section

PGW

PBPGW8190LOAD

Number of scans where the PGW-RP CPU Load was between 81% and 90%

Data Source

BSC_APG40

Source Field

PBPGW8190LOAD

Source Section

PGW

PBPGW9100LOAD

Number of scans where the PGW-RP CPU Load was between 91% and 100%

Data Source

BSC_APG40

Source Field

PBPGW9100LOAD

Source Section

PGW

PENDCONTSTRTBFB

Accumulated nr of times a Streaming TBF continue as a Streaming TBF after
TSTREAMPENDING has been triggered.

Data Source

BSC_IQG20_APG40

Source Field

PENDCONTSTRTBFB

Source Section

DELSTRTBFB

PENDSTRTBFB

Accumulated nr of times when TSTREAMPENDING has been triggered.

Data Source

BSC_IQG20_APG40

Source Field

PENDSTRTBFB

Source Section

DELSTRTBFB

PERFLOCABORT

Number of 09.31 PERFORM LOCATION ABORT messages sent to the SMLC.

Data Source

BSC_IQG20_APG40

Source Field

PERFLOCABORT

Source Section

BSCPOS

PERFLOCREQ

Number of 09.31 PERFORM LOCATION REQUEST messages sent to the SMLC.

Data Source

BSC_IQG20_APG40

Source Field

PERFLOCREQ

Source Section

BSCPOS

PERFLOCRESP

Number of 48.008 PERFORM LOCATION RESPONSE messages sent to the MSC.

Data Source

BSC_IQG20_APG40

Source Field

PERFLOCRESP

Source Section

BSCPOS

PERLEN

Period Length

PERLEN_MSC

Period Length (of BSC objects in MSC data)

PGWHLRPP

Number of PGW-RPs where the CPU load has exceeded the "high" load Threshold

Data Source

BSC_APG40

Source Field

PGWHLRPP

Source Section

PGWLDIST

RCBFSZMS

Link receiving message buffer size in MSUs

Data Source

BSC_IQG20_APG40

Source Field

RCBFSZMS

Source Section

SS7TOTAL2

RESET

Number of 08.71 RESET messages sent to the SMLC.

Data Source

BSC_IQG20_APG40

Source Field

RESET

Source Section

BSCPOS

RFNETCONG

Counter for routing failure, network congestion

Data Source

BSC_IQG20_APG40

Source Field

RFNETCONG

Source Section

C7SCPERF

RFNETFAIL

Counter for routing failure, network failure (MTP or SCCP failure)

Data Source

BSC_IQG20_APG40

Source Field

RFNETFAIL

Source Section

C7SCPERF

RFSPADDR

Counter for routing failure, no translation for this specific address

Data Source

BSC_IQG20_APG40

Source Field

RFSPADDR

Source Section

C7SCPERF

RFSSNFAIL

Counter for routing failure, subsystem failure

Data Source

BSC_IQG20_APG40

Source Field

RFSSNFAIL

Source Section

C7SCPERF

RFSUADDR

Counter for routing failure, no translation for address of such nature

Data Source

BSC_IQG20_APG40

Source Field

RFSUADDR

Source Section

C7SCPERF

RFUNEQUIP

Counter for routing failure, unequipped user

Data Source

BSC_IQG20_APG40

Source Field

RFUNEQUIP

Source Section

C7SCPERF

RFUNQUAL

Counter for routing failure, reason unqualified

Data Source

BSC_IOG20_APG40

Source Field

RFUNQUAL

Source Section

C7SCPERF

RPP0040

Tot nr of scans where the RPP load was between 0% and 40%

Data Source

BSC_IOG20_APG40

Source Field

RPP0040

Source Section

BSCGPRS2

RPP4160

Tot nr of scans where the RPP load was between 41% and 60%

Data Source

BSC_IOG20_APG40

Source Field

RPP4160

Source Section

BSCGPRS2

RPP6180

Tot nr of scans where the RPP load was between 61% and 80%

Data Source

BSC_IOG20_APG40

Source Field

RPP6180

Source Section

BSCGPRS2

RPP8190

Tot nr of scans where the RPP load was between 81% and 90%

Data Source

BSC_IQG20_APG40

Source Field

RPP8190

Source Section

BSCGPRS2

RPP9100

Tot nr of scans where the RPP load was between 91% and 100%

Data Source

BSC_IQG20_APG40

Source Field

RPP9100

Source Section

BSCGPRS2

SAMPPHGT_BSC

Number of MSUs requiring GTT, sampled for CP handling time

Data Source

BSC_IQG20_APG40

Source Field

SAMPPHGT

Source Section

SS7TOTAL

SAMPPHNT_BSC

Number of MSUs not requiring GTT, sampled for CP handling time.

Data Source

BSC_IQG20_APG40

Source Field

SAMPPHNT

Source Section

SS7TOTAL

SHLSCGREL

Number of successful SCGR relocations caused by 'high' load

Data Source

BSC_APG40

Source Field

SHLSCGREL

Source Section

PGWLDIST

SIZEDS_BSC

Memory size of data store

Data Source

BSC_IQG20_APG40

Source Field

SIZEDS

Source Section

CP

SIZESPS_BSC

Memory size of program store/main store

Data Source

BSC_IQG20_APG40

Source Field

SIZESPS

Source Section

CP

SIZERS_BSC

Memory size of reference store

Data Source

BSC_IQG20_APG40

Source Field

SIZERS

Source Section

CP

STARTCONTSTRTB

Accumulated nr of times a Streaming TBF continue as a Streaming TBF after TSTREAMSTART has been triggered.

Data Source

BSC_IQG20_APG40

Source Field

STARTCONTSTRTB

Source Section

DELSTRTB

STARTSTRTB

Accumulated nr of times when TSTREAMSTART has been triggered.

Data Source

BSC_IQG20_APG40

Source Field

STARTSTRTB

Source Section

DELSTRTB

SVHLSCGREL

Number of successful SCGR relocations caused by 'very high' load

Data Source

BSC_APG40

Source Field

SVHLSCGREL

Source Section

PGWLDIST

SYERROR

Counter for syntax error detected

Data Source

BSC_IQG20_APG40

Source Field

SYERROR

Source Section

C7SCPERF

TIMEPHGT_BSC

Accumulated total of CP handling time for sampled GTT MSUs in ms

Data Source

BSC_IQG20_APG40

Source Field

TIMEPHGT

Source Section

SS7TOTAL

TIMEPHNT_BSC

Accumulated total of CP handling time for sampled non-translated MSUs in ms.

Data Source

BSC_IQG20_APG40

Source Field

TIMEPHNT

Source Section

SS7TOTAL

TMASSALL

Assignment attempts for Multislot connections

Data Source

BSC_IQG20_APG40

Source Field

TMASSALL

Source Section

BSCMSLOT

TMCASSALL

Assignment complete for Multislot connections

Data Source

BSC_IQG20_APG40

Source Field

TMCASSALL

Source Section

BSCMSLOT

TMCHRECACC

Number of received channels for Multislot connections accumulator

Data Source

BSC_IQG20_APG40

Source Field

TMCHRECACC

Source Section

BSCMSLOT

TMCHREQACC

Number of requested channels for Multislot connections accumulator

Data Source

BSC_IQG20_APG40

Source Field

TMCHREQACC

Source Section

BSCMSLOT

TMCHSCAN

Number of accumulations of requested and received channels for Multislot connections counter

Data Source

BSC_IQG20_APG40

Source Field

TMCHSCAN

Source Section

BSCMSLOT

TMCNCBATT

Configuration change attempts for Multislot connections initiated by the SC

Data Source

BSC_IOG20_APG40

Source Field

TMCNCBATT

Source Section

BSCMSLOT

TMCNCBSUCC

Successful configuration changes for Multislot connections initiated by the BSC

Data Source

BSC_IOG20_APG40

Source Field

TMCNCBSUCC

Source Section

BSCMSLOT

TMCNCMATT

Configuration change attempts for Multislot connections initiated by the MSC

Data Source

BSC_IOG20_APG40

Source Field

TMCNCMATT

Source Section

BSCMSLOT

TMCNCMSUCC

Successful configuration changes for Multislot connections initiated by the MSC

Data Source

BSC_IQG20_APG40

Source Field

TMCNCMSUCC

Source Section

BSCMSLOT

TMHOATT

Handover attempts for Multislot connections

Data Source

BSC_IQG20_APG40

Source Field

TMHOATT

Source Section

BSCMSLOT

TMHOSUCC

Successful handovers for Multislot connections

Data Source

BSC_IQG20_APG40

Source Field

TMHOSUCC

Source Section

BSCMSLOT

TMMSU_BSC

Number of terminating management MSU's

Data Source

BSC_IOG20_APG40

Source Field

TMMSU

Source Section

SS7TOTAL

TMSIF_BSC

Number of terminating management SIF octets

Data Source

BSC_IOG20_APG40

Source Field

TMSIF

Source Section

SS7TOTAL

TOTCONGPAG

Number of Paging messages discarded due to congestion

Data Source

BSC_IOG20_APG40

Source Field

TOTCONGPAG

Source Section

BSC

TOTPAG

Number of paging messages received from the MSC

Data Source

BSC_IOG20_APG40

Source Field

TOTPAG

Source Section

BSC

TOTSCBUF1

Total number of simultaneous buffers of 256 octet length

Data Source

BSC_IQG20_APG40

Source Field

TOTSCBUF1

Source Section

C7SCCPUSE

TOTSCBUF2

Total number of simultaneous buffers of 512 octet length

Data Source

BSC_IQG20_APG40

Source Field

TOTSCBUF2

Source Section

C7SCCPUSE

TOTSCBUF3

Total number of simultaneous buffers of 1024 octet length

Data Source

BSC_IQG20_APG40

Source Field

TOTSCBUF3

Source Section

C7SCCPUSE

TOTSCBUF4

Total number of simultaneous buffers of 2048 octet length

Data Source

BSC_IQG20_APG40

Source Field

TOTSCBUF4

Source Section

C7SCCPUSE

TRASSYNCF

V.110 Synchronization Failure for semipermanently connected transcoder devices

Data Source

BSC_IQG20_APG40

Source Field

TRASSYNCF

Source Section

TRASEVENT

TREQRES

Terminating messages requiring reassembly. (connection oriented SCCP service)

Data Source

BSC_IQG20_APG40

Source Field

TREQRES

Source Section

SS7SCQOS

TSMODECS

Number of 'Remote Transcoder Lost' fault reports for Circuit Switched TS Mode.

Data Source

BSC_IQG20_APG40

Source Field

TSMODECS

Source Section

TRALOST

TSMODEIDLE

Number of 'Remote Transcoder Lost' fault reports for Idle TS Mode.

Data Source

BSC_IQG20_APG40

Source Field

TSMODEIDLE

Source Section

TRALOST

TSMODEPS

Number of 'Remote Transcoder Lost' fault reports for Packet Switched TS Mode.

Data Source

BSC_IQG20_APG40

Source Field

TSMODEPS

Source Section

TRALOST

TUMSU_BSC

Number of terminating SCCP/UP MSU's

Data Source

BSC_IQG20_APG40

Source Field

TUMSU

Source Section

SS7TOTAL

TUSIF_BSC

Number of terminating SCCP/UP SIF octets

Data Source

BSC_IQG20_APG40

Source Field

TUSIF

Source Section

SS7TOTAL

TXBFSZOC

Link transmission buffer size in octets

Data Source

BSC_IQG20_APG40

Source Field

TXBFSZOC

Source Section

SS7TOTAL2

UDTREC

Counter for UDT messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

UDTREC

Source Section

C7SCQOS

UDTSENT

Counter for UDT messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

UDTSENT

Source Section

C7SCQOS

UDTSREC

Counter for UDTS messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

UDTSREC

Source Section

C7SCQOS

UDTSSENT

Counter for UDTS messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

UDTSSENT

Source Section

C7SCQOS

USGSCNVC

30-minutes usage verification count , in 10 sec units

Data Source

BSC_IQG20_APG40

Source Field

USGSCNVC

Source Section

SS7TOTAL2

VHLSCGREL

Number of attempted SCGR relocations caused by 'very high' load

Data Source

BSC_APG40

Source Field

VHLSCGREL

Source Section

PGWLDIST

XUDTREC

Counter for XUDT messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

XUDTREC

Source Section

C7SCQOS

XUDTSENT

Counter for XUDT messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

XUDTSENT

Source Section

C7SCQOS

XUDTSREC

Counter for XUDTS messages received from MTP

Data Source

BSC_IQG20_APG40

Source Field

XUDTSREC

Source Section

C7SCQOS

XUDTSSENT

Counter for XUDTS messages sent to MTP

Data Source

BSC_IQG20_APG40

Source Field

XUDTSSENT

Source Section

C7SCQOS

Z22

T1.111.4 T22 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

Z22

Source Section

SS7TIMERS

Z23

T1.111.4 T23 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

Z23

Source Section

SS7TIMERS

Z24

T1.111.4 T24 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

Z24

Source Section

SS7TIMERS

Z25

T1.111.4 T25 Timer in seconds.

Data Source

BSC_IOG20_APG40

Source Field

Z25

Source Section

SS7TIMERS

Z26

T1.111.4 T26 Timer in seconds.

Data Source

BSC_I0G20_APG40

Source Field

Z26

Source Section

SS7TIMERS

Z27

T1.111.4 T27 Timer in seconds.

Data Source

BSC_I0G20_APG40

Source Field

Z27

Source Section

SS7TIMERS

Z28

T1.111.4 T28 Timer in seconds.

Data Source

BSC_I0G20_APG40

Source Field

Z28

Source Section

SS7TIMERS

Z29

T1.111.4 T29 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

Z29

Source Section

SS7TIMERS

Z30

T1.111.4 T30 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

Z30

Source Section

SS7TIMERS

Z31

T1.111.4 T31 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

Z31

Source Section

SS7TIMERS

Z32

T1.111.4 T32 Timer in seconds.

Data Source

BSC_IQG20_APG40

Source Field

Z32

Source Section

SS7TIMERS

BSC_NI Primitive Calculations

The following is a list of primitive calculations for the BSC_NI entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

BSC_SS7Dest Primitive Calculations

The following is a list of primitive calculations for the BSC_SS7Dest entity.

LocalName

BSC_C7Dest Name

Calculation

LocalKey

BSC_SS7HSLPrmGrp Primitive Calculations

The following is a list of primitive calculations for the BSC_SS7HSLPrmGrp entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

LocalName

BSC_SS7HSLPrmGrp Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Tech

Calculation

isNull (PERLEN) ? nullString() : "EricssonGSM"

BSC_SS7HSLPrmGrp Peg Counts

The following is a list of peg counts for the BSC_SS7HSLPrmGrp entity.

AERMM

AERM parameter M.

Data Source

BSC_IOG20_APG40

Source Field

AERMM

Source Section

SS7PRGRP

AERMN

AERM parameter N in octets.

Data Source

BSC_IOG20_APG40

Source Field

AERMN

Source Section

SS7PRGRP

AERMTIE

AERM parameter Tie.

Data Source

BSC_IOG20_APG40

Source Field

AERMTIE

Source Section

SS7PRGRP

AERMTIN

AERM parameter Tin.

Data Source

BSC_IQG20_APG40

Source Field

AERMTIN

Source Section

SS7PRGRP

ALPHA

A (alpha), exponential smoothing factor

Data Source

BSC_IQG20_APG40

Source Field

ALPHA

Source Section

SS7HSLPG1

CNGABTH1

Value of congestion abatement for level 1, CNGABTH1 = (number of octets in TR/RTB buffer when level 1 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGABTH1

Source Section

SS7HSLPG2

CNGABTH2

Value of congestion abatement for level 2, CNGABTH2 = (number of octets in TR/RTB buffer when level 2 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGABTH2

Source Section

SS7HSLPG2

CNGABTH3

Value of congestion abatement for level 3, CNGABTH3 = (number of octets in TR/RTB buffer when level 3 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGABTH3

Source Section

SS7HSLPG2

CNGDITH1

Value of congestion discard for level 1, CNGDITH1 = (number of octets in TR/RTB buffer when level 1 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGDITH1

Source Section

SS7HSLPG2

CNGDITH2

Value of congestion discard for level 2, CNGDITH2 = (number of octets in TR/RTB buffer when level 2 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGDITH2

Source Section

SS7HSLPG2

CNGDITH3

Value of congestion discard for level 3, CNGDITH3 = (number of octets in TR/RTB buffer when level 3 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGDITH3

Source Section

SS7HSLPG2

CNGONTH1

Value of congestion onset for level 1, CNGONTH1 = (number of octets in TB/RTB buffer when level 1 is reached / 1000).

Data Source

BSC_IQG20_APG40

Source Field

CNGONTH1

Source Section

SS7HSLPG2

CNGONTH2

Value of congestion onset for level 2, CNGONTH2 = (number of octets in TB/RTB buffer when level 2 is reached / 1000).

Data Source

BSC_IQG20_APG40

Source Field

CNGONTH2

Source Section

SS7HSLPG2

CNGONTH3

Value of congestion onset for level 3, CNGONTH3 = (number of octets in TB/RTB buffer when level 3 is reached / 1000)

Data Source

BSC_IQG20_APG40

Source Field

CNGONTH3

Source Section

SS7HSLPG2

ERRCORR

correction method

Data Source

BSC_IQG20_APG40

Source Field

ERRCORR

Source Section

SS7PRGRP

HLR_RELEASE

HLR Release

LT1ALNRD

T1.111.3 T1 Timer, "aligned/ready" in 50 ms units.

Data Source

BSC_IOG20_APG40

Source Field

LT1ALNRD

Source Section

SS7PRGRP

LT1UNACK

Timer_CC, time between transmission of unacknowledged BGN, END, ER, or RS PDUs

Data Source

BSC_IOG20_APG40

Source Field

LT1UNACK

Source Section

SS7HSLPG1

LT2NOALN

T1.111.3 T2 Timer, "not aligned" in 50 ms units.

Data Source

BSC_IOG20_APG40

Source Field

LT2NOALN

Source Section

SS7PRGRP

LT3ALIND

T1.111.3 T3 Timer, "aligned" in 50 msunits.

Data Source

BSC_IQG20_APG40

Source Field

LT3ALIND

Source Section

SS7PRGRP

LT4EMGPV

T1.111.3 T4 Timer, emergency proving period timer in 50 ms units.

Data Source

BSC_IQG20_APG40

Source Field

LT4EMGPV

Source Section

SS7PRGRP

LT4NMLPV

T1.111.3 T4 Timer, normal proving period timer in 50 ms units.

Data Source

BSC_IQG20_APG40

Source Field

LT4NMLPV

Source Section

SS7PRGRP

LT5DSIB

T1.111.3 T5 Timer, "sending SIB" in 50 ms units.

Data Source

BSC_IQG20_APG40

Source Field

LT5DSIB

Source Section

SS7PRGRP

LT6RMCNG

T1.111.3 T6 Timer, "remotecongestion" in 50 ms units.

Data Source

BSC_IQG20_APG40

Source Field

LT6RMCNG

Source Section

SS7PRGRP

LT7XDLAK

T1.111.3 T7 Timer, "excessive delay of acknowledgement" in 50 ms units.

Data Source

BSC_IQG20_APG40

Source Field

LT7XDLAK

Source Section

SS7PRGRP

LTBLCKSZ

T_{sup}, superblock size

Data Source

BSC_IQG20_APG40

Source Field

LTBLCKSZ

Source Section

SS7HSLPG1

LTFORPRV

Timer_FORCE-PROVING, force proving

Data Source

BSC_IOG20_APG40

Source Field

LTFORPRV

Source Section

SS7HSLPG1

LTKPALIV

Timer_KEEP-ALIVE, keep alive for 3622 cells/sec signalling rate

Data Source

BSC_IOG20_APG40

Source Field

LTKPALIV

Source Section

SS7HSLPG1

LTMAXPDU

Timer_NO-RESPONSE, maximum time interval during which at least one STAT PDU must be received

Data Source

BSC_IOG20_APG40

Source Field

LTMAXPDU

Source Section

SS7HSLPG1

LTMXIDLE

Timer_IDLE, maximum time of the IDLE phase of an SSCOP connection

Data Source

BSC_IQG20_APG40

Source Field

LTMXIDLE

Source Section

SS7HSLPG1

LTNOCREC

Timer_NO-CREDIT, maximum interval without credit

Data Source

BSC_IQG20_APG40

Source Field

LTNOCREC

Source Section

SS7HSLPG1

LTPRVPDU

Timer_T3, time between proving PDUs in 1ms

Data Source

BSC_IQG20_APG40

Source Field

LTPRVPDU

Source Section

SS7HSLPG1

LTPULLRT

Timer_POLL, Poll for 3622 cells/sec signalling rate

Data Source

BSC_IOG20_APG40

Source Field

LTPULLRT

Source Section

SS7HSLPG1

LTSCCFAL

Timer_T2, time SSCF will attempt alignment

Data Source

BSC_IOG20_APG40

Source Field

LTSCCFAL

Source Section

SS7HSLPG1

LTSCCOPR

Timer_REPEAT-SREC, minimum interval between reports of an SSCOP recovery

Data Source

BSC_IOG20_APG40

Source Field

LTSCCOPR

Source Section

SS7HSLPG1

LTSETALG

Timer_T1, time between link release and re-establishment during alignment

Data Source

BSC_IOG20_APG40

Source Field

LTSETALG

Source Section

SS7HSLPG1

LTSTATLS

T_loss, STAT loss limit

Data Source

BSC_IOG20_APG40

Source Field

LTSTATLS

Source Section

SS7HSLPG1

LTTAUERR

T (tau), error monitoring interval

Data Source

BSC_IOG20_APG40

Source Field

LTTAUERR

Source Section

SS7HSLPG1

MONEREVT

N, Monitoring intervals after 400ms error event

Data Source

BSC_IOG20_APG40

Source Field

MONEREVT

Source Section

SS7HSLPG1

MONINTER

N_blk, monitoring intervals per block

Data Source

BSC_IQG20_APG40

Source Field

MONINTER

Source Section

SS7HSLPG1

NMXSDPDU

MaxPD, maximum number of SD PDUs sent between POLL PDUs

Data Source

BSC_IQG20_APG40

Source Field

NMXSDPDU

Source Section

SS7HSLPG1

NMXSTPDU

MaxSTAT, maximum number of list elements in a STAT PDU

Data Source

BSC_IQG20_APG40

Source Field

NMXSTPDU

Source Section

SS7HSLPG1

NMXUNACK

MaxCC, maximum number of unacknowledged BGN, END, ER, or RS PDUs

Data Source

BSC_IQG20_APG40

Source Field

NMXUNACK

Source Section

SS7HSLPG1

NT17REAL

T1.111.4 T17 Timer, "delay to avoid oscillation of initial alignment failure and link restart" in ms.

Data Source

BSC_IQG20_APG40

Source Field

NT17REAL

Source Section

SS7PRGRP

PCRN2

Number of octets in TB and RTB before forced retransmission is ordered-64 -1. Valid only when ERRCORR = 2.

Data Source

BSC_IQG20_APG40

Source Field

PCRN2

Source Section

SS7PRGRP

PDUSENTP

N1, PDUs sent during normal proving

Data Source

BSC_IQG20_APG40

Source Field

PDUSENTP

Source Section

SS7HSLPG1

PERLEN

Period Length

SCCOPPDU

Max_NRP, maximum number of retransmitted SSCOP PDUs permissible for link proving

Data Source

BSC_IQG20_APG40

Source Field

SCCOPPDU

Source Section

SS7HSLPG1

SUERMD

SUERMD parameter D in signal units/4.

Data Source

BSC_IQG20_APG40

Source Field

SUERMD

Source Section

SS7PRGRP

SUERMT

SUERM parameter T.

Data Source

BSC_IQG20_APG40

Source Field

SUERMT

Source Section

SS7PRGRP

TAS

T1.111.7 T1 Timer, "signalling linktest message acknowledgementsupervision" in sec.

Data Source

BSC_IQG20_APG40

Source Field

TAS

Source Section

SS7PRGRP

THRSRUNQ

Thres, threshold for comparing the running Quality of Service

Data Source

BSC_IQG20_APG40

Source Field

THRSRUNQ

Source Section

SS7HSLPG1

TTS

Signalling link test procedure period in sec.

Data Source

BSC_IQG20_APG40

Source Field

TTS

Source Section

SS7PRGRP

BSC_SS7Link Primitive Calculations

The following is a list of primitive calculations for the BSC_SS7Link entity.

C7_SLTL_RX

C7 Link Received Traffic (Erlangs)

Calculation

```
(8 * vsum(nullValue(NSIFSRE, RECVD OCT_BSC_C7Link), (6 *  
nullValue(NMSURE, MSURECD_BSC_C7Link))) / (1.0 * ((PERLEN * 60.0) * 64000)))
```

C7_SLTL_TX

C7 Link Transmitted Traffic (Erlangs)

Calculation

```
(8 * vsum(nullValue(NSIFTR, TRAN OCT_BSC_C7Link), (6 *  
nullValue(NMSUTR, MSUTRAN_BSC_C7Link))) / (1.0 * ((PERLEN * 60.0) * 64000)))
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

NumberMSUsReceived

Number of MSU's received

Calculation

`nullValue (NMSURE, MSURECD_BSC_C7Link)`

NumberMSUsTransmitted

Number of MSU's transmitted

Calculation

`nullValue (NMSUTR, MSUTRAN_BSC_C7Link)`

NumberSIFandSIOOctetsReceived

Number of SIF and SIO octets received

Calculation

`nullValue (NSIFSRE, RECVD OCT_BSC_C7Link)`

NumberSIFandSIOOctetsTransmitted

Number of SIF and SIO octets transmitted

Calculation

`nullValue (NSIFTR, TRANOCT_BSC_C7Link)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

PercentageLinkAvailability

Percentage Link Availability

Calculation

`nullValue (ASLDUR, TLNKACTV_BSC_C7Link) * 100.0 / (PERLEN * 60)`

PercentageLocalBusy

Percentage Local Busy

Calculation

$((10.0 * LBUSDUR) / (PERLEN * 60.0))$

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

BSC_SS7Link Peg Counts

The following is a list of peg counts for the BSC_SS7Link entity.

ACHGOVRS_BSC_C7Link

Number of automatic changeovers

Data Source

BSC_IOG20_APG40

Source Field

ACHGOVRS

Source Section

SS7SLMT2

ACHGOVRS_BSC_HSC7Link

Number of automatic changeovers

Data Source

BSC_IOG20_APG40

Source Field

ACHGOVRS

Source Section

SS7HSLMT2

ALGNFLRS_BSC_HSC7Link

Signalling link alignment failures

Data Source

BSC_IOG20_APG40

Source Field

ALGNFLRS

Source Section

SS7HSLMT2

ASLDUR

Duration of link in In-Service state in seconds.

Data Source

BSC_IOG20_APG40

Source Field

ASLDUR

Source Section

C7SL1

BSS_RELEASE

Release

CDISCONX_BSC_HSC7Link

Number of abnormal occurrences of SSCOP Connection Disconnect

Data Source

BSC_IOG20_APG40

Source Field

CDISCONX

Source Section

SS7HSLMT3

CGSTEVL_BSC_HSC7Link

Current link transmit congestion level

Data Source

BSC_IOG20_APG40

Source Field

CGSTEVL

Source Section

SS7HSLMT1

CGSTLEVL

Current link transmit congestion level is 0, 1, 2, or 3.

Data Source

BSC_IOG20_APG40

Source Field

CGSTLEVL

Source Section

SS7HSLMT1

CGSTLEVL_BSC_C7Link

Current Link Transmit Congestion Level

Data Source

BSC_IOG20_APG40

Source Field

CGSTLEVL

Source Section

SS7SLMT1

CGSTSTAT_BSC_C7Link

Current Link Transmit Congestion State

Data Source

BSC_IOG20_APG40

Source Field

CGSTSTAT

Source Section

SS7SLMT1

CGSTSTAT_BSC_HSC7Link

Current link transmit congestion state

Data Source

BSC_IOG20_APG40

Source Field

CGSTSTAT

Source Section

SS7HSLMT1

CHOVERS

Number of occurrences of local automatic changeover

Data Source

BSC_IOG20_APG40

Source Field

CHOVERS

Source Section

C7SL1

CLUSTERCODE_BSC_SS7SLMT1

SS7 Link Cluster code

Data Source

BSC_IOG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLMT1

CLUSTERCODE_BSC_SS7SLMT2

SS7 Link Cluster code

Data Source

BSC_IQG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLMT2

CLUSTERCODE_BSC_SS7SLTRAFF

SS7 Link Cluster code

Data Source

BSC_IQG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLTRAFF

CNRECONX_BSC_HSC7Link

Number of SSCOP Connection Reestablishment/Resynchronizations

Data Source

BSC_IQG20_APG40

Source Field

CNRECONX

Source Section

SS7HSLMT3

CNSUMERS_BSC_HSC7Link

A SSCOP Connection sum of errors counter. That is the sum of CDISCONX and INITFLRS

Data Source

BSC_IOG20_APG40

Source Field

CNSUMERS

Source Section

SS7HSLMT3

CONCNT1

Number of occurrences of SL congestion indications level 1

Data Source

BSC_IOG20_APG40

Source Field

CONCNT1

Source Section

C7SL2

CONCNT2

Number of occurrences of SL congestion indications level 2

Data Source

BSC_IOG20_APG40

Source Field

CONCNT2

Source Section

C7SL2

CONCNT3

Number of occurrences of SL congestion indications level 3

Data Source

BSC_IQG20_APG40

Source Field

CONCNT3

Source Section

C7SL2

CONDUR1

Cumulative duration of SL congestion level 1 in seconds

Data Source

BSC_IQG20_APG40

Source Field

CONDUR1

Source Section

C7SL2

CONDUR2

Cumulative duration of SL congestion level 2 in seconds

Data Source

BSC_IQG20_APG40

Source Field

CONDUR2

Source Section

C7SL2

CONDUR3

Cumulative duration of SL congestion level 3 in seconds

Data Source

BSC_IQG20_APG40

Source Field

CONDUR3

Source Section

C7SL2

CONSTOP1

Number of indications of stop of SL congestion level 1

Data Source

BSC_IQG20_APG40

Source Field

CONSTOP1

Source Section

C7SL2

CONSTOP2

Number of indications of stop of SL congestion level 2

Data Source

BSC_IQG20_APG40

Source Field

CONSTOP2

Source Section

C7SL2

CONSTOP3

Number of indications of stop of SL congestion level 3

Data Source

BSC_IQG20_APG40

Source Field

CONSTOP3

Source Section

C7SL2

DATALOSTFLAG_SPDL

Lost data flag

Data Source

BSC_IQG20_APG40

Source Field

DATALOSTFLAG

Source Section

SPDL

DCLRFAIL_BSC_C7Link

Indication of Link Declared Failure State

Data Source

BSC_IQG20_APG40

Source Field

DCLRFAIL

Source Section

SS7SLMT1

DCLRFAIL_BSC_HSC7Link

Indication of link declared failure state

Data Source

BSC_IQG20_APG40

Source Field

DCLRFAIL

Source Section

SS7HSLMT1

DDCFLABN_BSC_C7Link

Duration of SL declared failures due to abnormal FIBR/BNSR in 10 sec. Units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLABN

Source Section

SS7SLMT2

DDCFLHWP_BSC_C7Link

Duration of SL declared failures due to hardware problems in 10 sec. units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLHWP

Source Section

SS7SLMT2

DDCFLHWP_BSC_HSC7Link

Duration of signalling link declared failures due to hardware problems in 10 sec units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLHWP

Source Section

SS7HSLMT2

DDCFLXDA_BSC_C7Link

Duration of SL declared failures due to excessive delay of acknowledgement in 10 sec. Units

Data Source

BSC_IOG20_APG40

Source Field

DDCFLXDA

Source Section

SS7SLMT2

DDCFLXDA_BSC_HSC7Link

Duration of signalling link declared failures due to excessive delay of acknowledgement in 10 sec units

Data Source

BSC_IOG20_APG40

Source Field

DDCFLXDA

Source Section

SS7HSLMT2

DDCFLXDC_BSC_C7Link

Duration of SL declared failures due to excessive duration of congestion

Data Source

BSC_IOG20_APG40

Source Field

DDCFLXDC

Source Section

SS7SLMT2

DDCFLXDC_BSC_HSC7Link

Duration of signalling link declared failures due to excessive duration of congestion in 10 sec units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLXDC

Source Section

SS7HSLMT2

DDCFLXER_BSC_C7Link

Duration of SL declared failures due to excessive error rate in 10 sec. units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLXER

Source Section

SS7SLMT2

DDCFLXER_BSC_HSC7Link

Duration of signalling link declared failures due to excessive error rate in 10 sec units

Data Source

BSC_IQG20_APG40

Source Field

DDCFLXER

Source Section

SS7HSLMT2

DISMSU1

Number of occurrences of MSUs discarded due to SL congestion level 1

Data Source

BSC_IOG20_APG40

Source Field

DISMSU1

Source Section

C7SL2

DISMSU2

Number of occurrences of MSUs discarded due to SL congestion level 2

Data Source

BSC_IOG20_APG40

Source Field

DISMSU2

Source Section

C7SL2

DISMSU3

Number of occurrences of MSUs discarded due to SL congestion level 3

Data Source

BSC_IOG20_APG40

Source Field

DISMSU3

Source Section

C7SL2

DRBSYDCL_BSC_C7Link

Duration of link busy status declared by near-end signaling terminal in 50 ms. units

Data Source

BSC_IOG20_APG40

Source Field

DRBSYDCL

Source Section

SS7SLMT1

DRBSYDCL_BSC_HSC7Link

Duration of link busy status declared by near-end signalling terminal in 50 ms units

Data Source

BSC_IOG20_APG40

Source Field

DRBSYDCL

Source Section

SS7HSLMT1

DRBSYRCD_BSC_C7Link

Duration of busy-link status unit received from far-end in 50 ms. units

Data Source

BSC_IOG20_APG40

Source Field

DRBSYRCD

Source Section

SS7SLMT1

DRDCLFLR_BSC_C7Link

Duration of SL declared failures, - All types in 10 sec. Units

Data Source

BSC_IOG20_APG40

Source Field

DRDCLFLR

Source Section

SS7SLMT2

DRDCLFLR_BSC_HSC7Link

Duration of signalling link declared failures, all types, in 10 sec units

Data Source

BSC_IQG20_APG40

Source Field

DRDCLFLR

Source Section

SS7HSLMT2

DRFEPRO_BSC_C7Link

Duration of far-end processor outage in 10 sec. units

Data Source

BSC_IQG20_APG40

Source Field

DRFEPRO

Source Section

SS7SLMT1

DRFEPRO_BSC_HSC7Link

Duration of Far-end Processor Outage in 10 second units

Data Source

BSC_IQG20_APG40

Source Field

DRFEPRO

Source Section

SS7HSLMT1

DRLCLPRO_BSC_C7Link

Duration of near-end processor outage in 10 sec. units

Data Source

BSC_IOG20_APG40

Source Field

DRLCLPRO

Source Section

SS7SLMT2

DRLCLPRO_BSC_HSC7Link

Duration of near-end processor outage in 10 second units

Data Source

BSC_IOG20_APG40

Source Field

DRLCLPRO

Source Section

SS7HSLMT2

DRLKFAIL_BSC_C7Link

Duration of SL failures (declared and undeclared) in 10 sec. units.

Data Source

BSC_IOG20_APG40

Source Field

DRLKFAIL

Source Section

SS7SLMT2

DRLKINHB_BSC_C7Link

Duration of signalling link management inhibits in 10 sec. units

Data Source

BSC_IOG20_APG40

Source Field

DRLKINHB

Source Section

SS7SLMT2

DRLKINHB_BSC_HSC7Link

Duration of signalling link management inhibits in 10 sec units

Data Source

BSC_IOG20_APG40

Source Field

DRLKINHB

Source Section

SS7HSLMT2

DRNOCRED_BSC_HSC7Link

Cumulative duration of time in seconds

Data Source

BSC_IOG20_APG40

Source Field

DRNOCRED

Source Section

SS7HSLMT3

ECCNGLV1_BSC_C7Link

Number of times SL enters level 1 congestion state

Data Source

BSC_IOG20_APG40

Source Field

ECCNGLV1

Source Section

SS7SLMT1

ECCNGLV1_BSC_HSC7Link

Number of times a signalling link enters level 1 congestion state

Data Source

BSC_IOG20_APG40

Source Field

ECCNGLV1

Source Section

SS7HSLMT1

ECCNGLV2_BSC_C7Link

Number of times SL enters level 2 congestion state

Data Source

BSC_IOG20_APG40

Source Field

ECCNGLV2

Source Section

SS7SLMT1

ECCNGLV2_BSC_HSC7Link

Number of times a signalling link enters level 2 congestion state

Data Source

BSC_IOG20_APG40

Source Field

ECCNGLV2

Source Section

SS7HSLMT1

ECCNGLV3_BSC_C7Link

Number of times SL enters level 3 congestion state

Data Source

BSC_IQG20_APG40

Source Field

ECCNGLV3

Source Section

SS7SLMT1

ECCNGLV3_BSC_HSC7Link

Number of times a signalling link enters level 3 congestion state

Data Source

BSC_IQG20_APG40

Source Field

ECCNGLV3

Source Section

SS7HSLMT1

ERRSEC_BSC_C7Link

Number of errored seconds

Data Source

BSC_IQG20_APG40

Source Field

ERRSEC

Source Section

SS7SLTRAFF

ERRSEC_BSC_HSC7Link

Number of errored seconds for SAAL, ATM and Physical layers

Data Source

BSC_IOG20_APG40

Source Field

ERRSEC

Source Section

SS7HSLTRAF

FARMGINH_BSC_C7Link

Number of far-end management inhibits

Data Source

BSC_IOG20_APG40

Source Field

FARMGINH

Source Section

SS7SLMT2

FARMGINH_BSC_HSC7Link

Number of far-end management inhibits

Data Source

BSC_IOG20_APG40

Source Field

FARMGINH

Source Section

SS7HSLMT2

HDRDSCDS_BSC_HSC7Link

Number of incoming ATM cells discarded due to protocol (ATM-layer Header) errors

Data Source

BSC_IOG20_APG40

Source Field

HDRDSCDS

Source Section

SS7HSLMT3

HECDSCDS_BSC_HSC7Link

Number of incoming ATM cells discarded due to Header Error Control (HEC) violations

Data Source

BSC_IOG20_APG40

Source Field

HECDSCDS

Source Section

SS7HSLMT3

HSLDISMSU1

Number of messages discarded due to SL congestion on level 1

Data Source

BSC_IOG20_APG40

Source Field

HSLDISMSU1

Source Section

HS7SL1

HSLDISMSU2

Number of messages discarded due to SL congestion on level 2

Data Source

BSC_IOG20_APG40

Source Field

HSLDISMSU2

Source Section

HS7SL1

HSLDISMSU3

Number of messages discarded due to SL congestion on level 3

Data Source

BSC_IOG20_APG40

Source Field

HSLDISMSU3

Source Section

HS7SL1

HSLHDRDSCDS

Number of cells discarded due to protocol (ATM Layer Header) errors

Data Source

BSC_IOG20_APG40

Source Field

HSLHDRDSCDS

Source Section

HS7SL1

HSLHECDSCDS

Number of cells discarded due to header error control violations

Data Source

BSC_IOG20_APG40

Source Field

HSLHECDSCDS

Source Section

HS7SL1

HSLINCCELLS

Number of incoming network data collection valid (occupied) ATM cells

Data Source

BSC_IQG20_APG40

Source Field

HSLINCCELLS

Source Section

HS7SL1

HSLLOFMSU1

Number of congestion events resulting in loss of messages at level 1

Data Source

BSC_IQG20_APG40

Source Field

HSLLOFMSU1

Source Section

HS7SL1

HSLLOFMSU2

Number of congestion events resulting in loss of messages at level 2

Data Source

BSC_IQG20_APG40

Source Field

HSLLOFMSU2

Source Section

HS7SL1

HSLLOFMSU3

Number of congestion events resulting in loss of messages at level 3

Data Source

BSC_IQG20_APG40

Source Field

HSLLOFMSU3

Source Section

HS7SL1

HSLNMSURE

Number of messages received

Data Source

BSC_IQG20_APG40

Source Field

HSLNMSURE

Source Section

HS7SL1

HSLNMSUTR

Number of messages transmitted(not including retransmitted messages)

Data Source

BSC_IQG20_APG40

Source Field

HSLNMSUTR

Source Section

HS7SL1

HSLNNAREC

Number of negative acknowledgments received to messages sent. That is the number of MAA-ERROR.indications with error type sequenced data loss (outgoing message error rate)

Data Source

BSC_IQG20_APG40

Source Field

HSLNNAREC

Source Section

HS7SL1

HSLNSUERR

Number of messages received in error (incoming message error rate)

Data Source

BSC_IQG20_APG40

Source Field

HSLNSUERR

Source Section

HS7SL1

HSLOCDANMLS

Number of out of cell delineation anomalies

Data Source

BSC_IQG20_APG40

Source Field

HSLOCDANMLS

Source Section

HS7SL1

HSLOUTCELLS

Number of outgoing network data collection valid ATM cells

Data Source

BSC_IOG20_APG40

Source Field

HSLOUTCELLS

Source Section

HS7SL1

HSLTTLRBC

Duration of local busy in 100 ms units

Data Source

BSC_IOG20_APG40

Source Field

HSLTTLRBC

Source Section

HS7SL1

ICUICELS_BSC_HSC7Link

Number of incoming (received) ATM user-information (UI) cells

Data Source

BSC_IOG20_APG40

Source Field

ICUICELS

Source Section

SS7HSLTRAF

ILS_BSC_SS7SLMT1

Link Set Pointer

Data Source

BSC_IOG20_APG40

Source Field

ILS

Source Section

SS7SLMT1

ILS_BSC_SS7SLTRAFF

Link Set Pointer

Data Source

BSC_IOG20_APG40

Source Field

ILS

Source Section

SS7SLTRAFF

INCCELLS_BSC_HSC7Link

Number of incoming (received) NDC-valid ATM cells

Data Source

BSC_IOG20_APG40

Source Field

INCCELLS

Source Section

SS7HSLTRAF

INITFLRS_BSC_HSC7Link

Number of SSCOP Connection Initiation Failures

Data Source

BSC_IOG20_APG40

Source Field

INITFLRS

Source Section

SS7HSLMT3

INVLPDUS_BSC_HSC7Link

Number of invalid SSCOP PDUs received

Data Source

BSC_IQG20_APG40

Source Field

INVLPDUS

Source Section

SS7HSLMT3

LACKCRED_BSC_HSC7Link

Number of times that SSCOP had PDUs to send to its peer but could not do so because it was not given credit by the far end

Data Source

BSC_IQG20_APG40

Source Field

LACKCRED

Source Section

SS7HSLMT3

LBUSDUR

Duration of local busy in 100ms units

Data Source

BSC_IQG20_APG40

Source Field

LBUSDUR

Source Section

C7SL1

LINHNO

Number of occurrences of local management inhibit

Data Source

BSC_IQG20_APG40

Source Field

LINHNO

Source Section

C7SL1

LKMTTCST_BSC_C7Link

Maintenance state (same as 'signalling link service status')

Data Source

BSC_IQG20_APG40

Source Field

LKMTTCST

Source Section

SS7SLMT1

LKMTTCST_BSC_HSC7Link

Maintenance state (same as 'signalling link service status')

Data Source

BSC_IQG20_APG40

Source Field

LKMTTCST

Source Section

SS7HSLMT1

LOCINHDUR

Duration of SL inhibition due to local management action in seconds

Data Source

BSC_IQG20_APG40

Source Field

LOCINHDUR

Source Section

C7SL1

LOFMSU1

Number of congestion events resulting in loss of MSUs level 1

Data Source

BSC_IQG20_APG40

Source Field

LOFMSU1

Source Section

C7SL2

LOFMSU2

Number of congestion events resulting in loss of MSUs level 2

Data Source

BSC_IQG20_APG40

Source Field

LOFMSU2

Source Section

C7SL2

LOFMSU3

Number of congestion events resulting in loss of MSUs level 3

Data Source

BSC_IOG20_APG40

Source Field

LOFMSU3

Source Section

C7SL2

LS10SCAN_BSC_C7Link

Number of 10 second scans in S7LS

Data Source

BSC_IOG20_APG40

Source Field

LS10SCAN

Source Section

SS7SLMT2

LS10SCAN_BSC_HSC7Link

Number of 10 sec scans in S7LS

Data Source

BSC_IOG20_APG40

Source Field

LS10SCAN

Source Section

SS7HSLMT2

MCHGOVRS_BSC_C7Link

Number of near-end manual changeovers 17 Value of hourly link maintenance threshold

Data Source

BSC_IOG20_APG40

Source Field

MCHGOVRS

Source Section

SS7SLMT2

MCHGOVRS_BSC_HSC7Link

Number of near-end manual changeovers

Data Source

BSC_IOG20_APG40

Source Field

MCHGOVRS

Source Section

SS7HSLMT2

MEMBERCODE_BSC_SS7SLMT1

SS7 Cluster Member Code

Data Source

BSC_IOG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLMT1

MEMBERCODE_BSC_SS7SLMT2

SS7 Cluster Member Code

Data Source

BSC_IOG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLMT2

MEMBERCODE_BSC_SS7SLTRAFF

SS7 Cluster Member Code

Data Source

BSC_IQG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLTRAFF

MGMTINHB_BSC_C7Link

Indication of Link Management-Inhibit

Data Source

BSC_IQG20_APG40

Source Field

MGMTINHB

Source Section

SS7SLMT1

MGMTINHB_BSC_HSC7Link

Indication of link management-inhibit status

Data Source

BSC_IQG20_APG40

Source Field

MGMTINHB

Source Section

SS7HSLMT1

MOCTRGTT_BSC_HSC7Link

Number of MTP3 message octets associated with MTP3 messages received that required GTT

Data Source

BSC_IQG20_APG40

Source Field

MOCTRGTT

Source Section

SS7HSLTRAF

MSGDISC0_BSC_HSC7Link

Number of priority 0 MTP3 messages discarded due to signalling link congestion

Data Source

BSC_IQG20_APG40

Source Field

MSGDISC0

Source Section

SS7HSLMT1

MSGDISC1_BSC_HSC7Link

Number of priority 1 MTP3 messages discarded due to signalling link congestion

Data Source

BSC_IQG20_APG40

Source Field

MSGDISC1

Source Section

SS7HSLMT1

MSGDISC2_BSC_HSC7Link

Number of priority 2 MTP3 messages discarded due to signalling link congestion

Data Source

BSC_IOG20_APG40

Source Field

MSGDISC2

Source Section

SS7HSLMT1

MSGDISC3_BSC_HSC7Link

Number of priority 3 MTP3 messages discarded due to signalling link congestion

Data Source

BSC_IOG20_APG40

Source Field

MSGDISC3

Source Section

SS7HSLMT1

MSGDISCH_BSC_HSC7Link

Number of MTP3 messages discarded due to message length longer than 272 octets

Data Source

BSC_IOG20_APG40

Source Field

MSGDISCH

Source Section

SS7HSLMT1

MSGSRCVD_BSC_HSC7Link

Number of MTP3 messages received

Data Source

BSC_IOG20_APG40

Source Field

MSGSRCVD

Source Section

SS7HSLTRAF

MSGSRGTT_BSC_HSC7Link

Number of MTP3 messages received requiring Global Title Translation (GTT)

Data Source

BSC_IOG20_APG40

Source Field

MSGSRGTT

Source Section

SS7HSLTRAF

MSGSTRAN_BSC_HSC7Link

Number of MTP3 messages transmitted

Data Source

BSC_IOG20_APG40

Source Field

MSGSTRAN

Source Section

SS7HSLTRAF

MSUDISC0_BSC_C7Link

Number of priority 0 MSUs discarded due to SL congestion

Data Source

BSC_IOG20_APG40

Source Field

MSUDISC0

Source Section

SS7SLMT1

MSUDISC1_BSC_C7Link

Number of priority 1 MSUs discarded due to SL congestion

Data Source

BSC_IQG20_APG40

Source Field

MSUDISC1

Source Section

SS7SLMT1

MSUDISC2_BSC_C7Link

Number of priority 2 MSUs discarded due to SL congestion

Data Source

BSC_IQG20_APG40

Source Field

MSUDISC2

Source Section

SS7SLMT1

MSUDISC3_BSC_C7Link

Number of priority 3 MSUs discarded due to SL congestion

Data Source

BSC_IQG20_APG40

Source Field

MSUDISC3

Source Section

SS7SLMT1

MSURCERR_BSC_C7Link

Number of MSUs received in error 10 Value of hourly link maintenance

Data Source

BSC_IQG20_APG40

Source Field

MSURCERR

Source Section

SS7SLTRAFF

MSURECD_BSC_C7Link

Number of MSU's received 4 Number of SIF and SIO octets received

Data Source

BSC_IQG20_APG40

Source Field

MSURECD

Source Section

SS7SLTRAFF

MSURETRN_BSC_C7Link

Number of MSUs retransmitted 8 Value of hourly link maintenance

Data Source

BSC_IQG20_APG40

Source Field

MSURETRN

Source Section

SS7SLTRAFF

MSGDISCH_SS7HSLMT1

Number of MTP3 messages discarded due to message length longer than 272 octets

Data Source

MSC_IOG20_APG40

Source Field

MSGDISCH

Source Section

SS7HSLMT1

MSGSRCVD_SS7HSLTRAF

Number of MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

MSGSRCVD

Source Section

SS7HSLTRAF

MSGSRGTT_SS7HSLTRAF

Number of MTP3 messages received requiring Global Title Translation (GTT)

Data Source

MSC_IOG20_APG40

Source Field

MSGSRGTT

Source Section

SS7HSLTRAF

MSGSTRAN_SS7HSLTRAF

Number of MTP3 messages transmitted

Data Source

MSC_IOG20_APG40

Source Field

MSGSTRAN

Source Section

SS7HSLTRAF

MSUDISC0

Number of priority 0 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC0

Source Section

SS7SLMT1

MSUDISC1

Number of priority 1 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC1

Source Section

SS7SLMT1

MSUDISC2

Number of priority 2 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC2

Source Section

SS7SLMT1

MSUDISC3

Number of priority 3 MSUs discarded due to SL congestion

Data Source

MSC_IQG20_APG40

Source Field

MSUDISC3

Source Section

SS7SLMT1

MSURCERR

Number of MSUs received in error

Data Source

MSC_IQG20_APG40

Source Field

MSURCERR

Source Section

SS7SLTRAFF

MSURECD_MSC_C7Link

Number of MSU's received

Data Source

MSC_IQG20_APG40

Source Field

MSURECD

Source Section

SS7SLTRAFF

MSURETRN_MSC_C7Link

Number of MSUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

MSURETRN

Source Section

SS7SLTRAFF

MSUSRGTT

MSUs received requiring GTT

Data Source

MSC_IQG20_APG40

Source Field

MSUSRGTT

Source Section

SS7SLTRAFF

MSUTRAN_MSC_C7Link

Number of MSU's transmitted, (retransmission not included)

Data Source

MSC_IQG20_APG40

Source Field

MSUTRAN

Source Section

SS7SLTRAFF

MTCEUSG

Link maintenance usage in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

MTCEUSG

Source Section

SS7SLMT1

MTCEUSG_SS7HSLMT1

Link maintenance usage in 10 second units

Data Source

MSC_IOG20_APG40

Source Field

MTCEUSG

Source Section

SS7HSLMT1

N10SCAN_MSC_C7Link

Number of ten second scannings

Data Source

MSC_IOG20_APG40

Source Field

N10SCAN

Source Section

SS7SLMT1

N10SCAN_SS7HSLMT1

Number of 10 sec scans.

Data Source

MSC_IOG20_APG40

Source Field

N10SCAN

Source Section

SS7HSLMT1

NDCFLABN

Number of SL declared failures abnormal FIBR/BNSR

Data Source

MSC_IOG20_APG40

Source Field

NDCFLABN

Source Section

SS7SLMT2

NDCFLHWP

Number of SL declared failures due to hardware problems

Data Source

MSC_IOG20_APG40

Source Field

NDCFLHWP

Source Section

SS7SLMT2

NDCFLHWP_SS7HSLMT2

Number of signalling link declared failures due to hardware problems

Data Source

MSC_IOG20_APG40

Source Field

NDCFLHWP

Source Section

SS7HSLMT2

NDCFLXDA

Number of SL declared failures due to excessive delay of acknowledgement

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDA

Source Section

SS7SLMT2

NDCFLXDA_SS7HSLMT2

Number of signalling link declared failures due to excessive delay of acknowledgement

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDA

Source Section

SS7HSLMT2

NDCFLXDC

Number of SL declared failures due to excessive duration of congestion

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDC

Source Section

SS7SLMT2

NDCFLXDC_SS7HSLMT2

Number of signalling link declared failures due to excessive duration of congestion

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDC

Source Section

SS7HSLMT2

NDCFLXER

Number of SL declared failures due to excessive error rate

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXER

Source Section

SS7SLMT2

NDCFLXER_SS7HSLMT2

Number of signalling link declared failures due to excessive error rate

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXER

Source Section

SS7HSLMT2

NDISC

Number of MSUs discarded due to SL congestion.

Data Source

MSC_C7TMFILE

Source Field

NDISC

Source Section

ASC_CCITT7

NEARMGIH

Number of near-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

NEARMGIH

Source Section

SS7SLMT2

NEARMGIH_SS7HSLMT2

Number of near-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

NEARMGIH

Source Section

SS7HSLMT2

NEGACKS

Number of negative acknowledgments received

Data Source

MSC_IOG20_APG40

Source Field

NEGACKS

Source Section

SS7SLTRAFF

NLOSS

Number of congestion events resulting in loss of MSUs.

Data Source

MSC_C7TMFILE

Source Field

NLOSS

Source Section

ASC_CCITT7

NMDCLFLR

Number of SL declared failures,- All types

Data Source

MSC_IOG20_APG40

Source Field

NMDCLFLR

Source Section

SS7SLMT2

NMDCLFLR_SS7HSLMT2

Number of signalling link declared failures, all types

Data Source

MSC_IOG20_APG40

Source Field

NMDCLFLR

Source Section

SS7HSLMT2

NMSURE_ASC_CCITT7

Number of MSUs received.

Data Source

MSC_C7TMFILE

Source Field

NMSURE

Source Section

ASC_CCITT7

NMSURE_C7SL1

Number of MSU's received

Data Source

MSC_IQG20_APG40

Source Field

NMSURE

Source Section

C7SL1

NMSUTR_ASC_CCITT7

Number of MSUs transmitted.

Data Source

MSC_C7TMFILE

Source Field

NMSUTR

Source Section

ASC_CCITT7

NMSUTR_C7SL1

Number of MSU's transmitted

Data Source

MSC_IQG20_APG40

Source Field

NMSUTR

Source Section

C7SL1

NNAREC

Number of negative acknowledgements received

Data Source

MSC_IQG20_APG40

Source Field

NNAREC

Source Section

C7SL1

NOCTRE

Number of SIF and SIO octets received.

Data Source

MSC_C7TMFILE

Source Field

NOCTRE

Source Section

ASC_CCITT7

NOCTRTR

Number of octets retransmitted.

Data Source

MSC_C7TMFILE

Source Field

NOCTRTR

Source Section

ASC_CCITT7

NOCTTR

Number of SIF and SIO octets transmitted.

Data Source

MSC_C7TMFILE

Source Field

NOCTTR

Source Section

ASC_CCITT7

NORTRO

Number of octets retransmitted

Data Source

MSC_IQG20_APG40

Source Field

NORTRO

Source Section

C7SL1

NSIFSRE

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

NSIFSRE

Source Section

C7SL1

NSIFTR

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

NSIFTR

Source Section

C7SL1

NSLALPRFL

Number of occurrences of SL Alignment or Proving failure.

Data Source

MSC_IOG20_APG40

Source Field

NSLALPRFL

Source Section

C7SL1

NSLCO

Number of SL congestion indications.

Data Source

MSC_C7TMFILE

Source Field

NSLCO

Source Section

ASC_CCITT7

NSLFA

Number of SL failures, all reasons.

Data Source

MSC_C7TMFILE

Source Field

NSLFA

Source Section

ASC_CCITT7

NSUERR

Number of signal units in error

Data Source

MSC_IQG20_APG40

Source Field

NSUERR

Source Section

C7SL1

OCDANMLS_SS7HSLMT3

Number of time of Out of Cell Delineation (OCD) anomalies

Data Source

MSC_IQG20_APG40

Source Field

OCDANMLS

Source Section

SS7HSLMT3

OCTRCGTT

MSU octets received for messages requiring GTT

Data Source

MSC_IOG20_APG40

Source Field

OCTRCGTT

Source Section

SS7SLTRAFF

OGUICELS_SS7HSLTRAF

Number of outgoing (transmitted) ATM user-information (UI) cells

Data Source

MSC_IOG20_APG40

Source Field

OGUICELS

Source Section

SS7HSLTRAF

OUTCELLS_SS7HSLTRAF

Number of outgoing (transmitted) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

OUTCELLS

Source Section

SS7HSLTRAF

PDULSTER_SS7HSLMT3

Number of SSCOP PDUs with List Element Errors

Data Source

MSC_IOG20_APG40

Source Field

PDULSTER

Source Section

SS7HSLMT3

PDUOCTRC_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTRC

Source Section

SS7HSLTRAF

PDUOCTTR_SS7HSLTRAF

Number of SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTTR

Source Section

SS7HSLTRAF

PDUSRCVD_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs retransmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUSRCVD

Source Section

SS7HSLTRAF

PDUSTRAN_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs transmitted, including retransmissions

Data Source

MSC_IOG20_APG40

Source Field

PDUSTRAN

Source Section

SS7HSLTRAF

PDUSUMER_SS7HSLMT3

A SSCOP Errored PDUs sum of errors counter. That is a sum of UNEXPDUS, INVLPDUS and PDULSTER

Data Source

MSC_IOG20_APG40

Source Field

PDUSUMER

Source Section

SS7HSLMT3

PERLEN

Period Length

PERLEN_C7TM

Period Length (of C7TMFILE data)

PROSTAT

Indication of processor outage status units being received

Data Source

MSC_IQG20_APG40

Source Field

PROSTAT

Source Section

SS7SLMT1

PROTRAN

Indication of processor outage status units being transmitted

Data Source

MSC_IQG20_APG40

Source Field

PROTRAN

Source Section

SS7SLMT2

RECVDOCT_MSC_C7Link

Number of SIF and SIO octets received

Data Source

MSC_IQG20_APG40

Source Field

RECVDOCT

Source Section

SS7SLTRAFF

RECVDOCT_SS7HSLTRAF

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7HSLTRAF

REMINHDUR

Duration of SL inhibition due to remote management action in seconds

Data Source

MSC_IOG20_APG40

Source Field

REMINHDUR

Source Section

C7SL1

RETRNOCT_MSC_C7Link

Number of SIF, SIO, LI, FSN, and BSN octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

RETRNOCT

Source Section

SS7SLTRAFF

RINHNO

Number of occurrences of local management uninhibit

Data Source

MSC_IOG20_APG40

Source Field

RINHNO

Source Section

C7SL1

SAALINSV_SS7HSLMT3

Total time in seconds that the link is regarded in-service (at level 2) by SAAL

Data Source

MSC_IOG20_APG40

Source Field

SAALINSV

Source Section

SS7HSLMT3

SAMPCNT

Number of samples from signalling terminal

Data Source

MSC_IOG20_APG40

Source Field

SAMPCNT

Source Section

SS7SLMT1

SAMPCNT_SS7HSLMT1

Number of samples from signalling terminal

Data Source

MSC_IOG20_APG40

Source Field

SAMPCNT

Source Section

SS7HSLMT1

SCANSEC_ASC_CCITT7

Measurement duration in seconds.

Data Source

MSC_C7TMFILE

Source Field

SCANSEC

Source Section

ASC_CCITT7

SDOCTRCV_SS7HSLTRAF

Number of SSCOP Sequence Data (SD) PDUs transmitted, including retransmissions

Data Source

MSC_IQG20_APG40

Source Field

SDOCTRCV

Source Section

SS7HSLTRAF

SDOCTRTR_SS7HSLTRAF

Number of octets associated with SSCOP PDUs of all types transmitted

Data Source

MSC_IQG20_APG40

Source Field

SDOCTRTR

Source Section

SS7HSLTRAF

SDOCTTRN_SS7HSLTRAF

Number of SSCOP PDUs of all types received

Data Source

MSC_IQG20_APG40

Source Field

SDOCTTRN

Source Section

SS7HSLTRAF

SDPDURCV_SS7HSLTRAF

Number of octets associated with SSCOP PDUs of all types received

Data Source

MSC_IQG20_APG40

Source Field

SDPDURCV

Source Section

SS7HSLTRAF

SDPDURRR_SS7HSLTRAF

Number of SSCOP SD PDUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

SDPDURRR

Source Section

SS7HSLTRAF

SDPDURTR_SS7HSLTRAF

Number of SSCOP PDUs of all types transmitted

Data Source

MSC_IOG20_APG40

Source Field

SDPDURTR

Source Section

SS7HSLTRAF

SDPDUTRN_SS7HSLTRAF

Number of SSCOP SD PDU transmitted requiring retransmission because they were not acknowledged by the far-end's SSCOP peer

Data Source

MSC_IOG20_APG40

Source Field

SDPDUTRN

Source Section

SS7HSLTRAF

SL10SCAN

Number of 10 second scans in S7SL

Data Source

MSC_IOG20_APG40

Source Field

SL10SCAN

Source Section

SS7SLMT2

SL10SCAN_SS7HSLMT2

Number of 10 sec scans in S7SL

Data Source

MSC_IQG20_APQ40

Source Field

SL10SCAN

Source Section

SS7HSLMT2

SLPARAMGP

Parameter group number for signalling link

Data Source

MSC_IQG20_APQ40

Source Field

SLPARAMGP

Source Section

SS7SLMT2

SLPARAMGP_SS7HSLMT2

Parameter group number for signalling link

Data Source

MSC_IQG20_APQ40

Source Field

SLPARAMGP

Source Section

SS7HSLMT2

SYS7IND_C7SL1

Indicator

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SL1

SYS7IND_C7SL2

Indicator

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SL2

TDCNGLV1

Total duration of level 1 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV1

Source Section

SS7SLMT1

TDCNGLV1_SS7HSLMT1

Total duration of level 1 congestion state in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV1

Source Section

SS7HSLMT1

TDCNGLV2

Total duration of level 2 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV2

Source Section

SS7SLMT1

TDCNGLV2_SS7HSLMT1

Total duration of level 2 congestion state in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV2

Source Section

SS7HSLMT1

TDCNGLV3

Total duration of level 3 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV3

Source Section

SS7SLMT1

TDCNGLV3_SS7HSLMT1

Total duration of level 3 congestion state in 10 sec units

Data Source

MSC_IQG20_APG40

Source Field

TDCNGLV3

Source Section

SS7HSLMT1

THRACHOV

Value of hourly link maintenance threshold for automatic changeovers

Data Source

MSC_IQG20_APG40

Source Field

THRACHOV

Source Section

SS7SLMT2

THRMSUER

Value of hourly link maintenance threshold for MSUs received in error

Data Source

MSC_IQG20_APG40

Source Field

THRMSUER

Source Section

SS7SLTRAFF

THRNEGAK

Value of hourly link maintenance threshold for negative acknowledgement received

Data Source

MSC_IOG20_APG40

Source Field

THRNEGAK

Source Section

SS7SLTRAFF

TLNKACTV

Signalling link active time in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TLNKACTV

Source Section

SS7SLMT1

TLNKACTV_SS7HSLMT1

Signalling link active time in 10 second units

Data Source

MSC_IOG20_APG40

Source Field

TLNKACTV

Source Section

SS7HSLMT1

TOTOCMSG_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in MTP3 messages

Data Source

MSC_IOG20_APG40

Source Field

TOTOCMSG

Source Section

SS7HSLMT1

TOTOCMSU

Accumulated total of link transmission buffer occupancy in MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTOCMSU

Source Section

SS7SLMT1

TOTOCOCT

Accumulated total of link transmission buffer occupancy in octets

Data Source

MSC_IOG20_APG40

Source Field

TOTOCOCT

Source Section

SS7SLMT1

TOTOCOCT_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in octets

Data Source

MSC_IOG20_APG40

Source Field

TOTOCOCT

Source Section

SS7HSLMT1

TOTPRIO0

Accumulated total of link transmission buffer occupancy in priority 0 MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO0

Source Section

SS7SLMT1

TOTPRIO0_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 0 MTP3 messages

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO0

Source Section

SS7HSLMT1

TOTPRIO1

Accumulated total of link transmission buffer occupancy in priority 1 MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO1

Source Section

SS7SLMT1

TOTPRIO1_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 1 MTP3 messages

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO1

Source Section

SS7HSLMT1

TOTPRIO2

Accumulated total of link transmission buffer occupancy in priority 2 MSUs

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO2

Source Section

SS7SLMT1

TOTPRIO2_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 2 MTP3 messages

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO2

Source Section

SS7HSLMT1

TOTPRIO3

Accumulated total of link transmission buffer occupancy in priority 3 MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO3

Source Section

SS7SLMT1

TOTPRIO3_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 3 MTP3 messages

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO3

Source Section

SS7HSLMT1

TRANOCT_MSC_C7Link

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7SLTRAFF

TRANOCT_SS7HSLTRAF

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7HSLTRAF

UNAVAILDUR

Duration of SL unavailability (all reasons) in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVAILDUR

Source Section

C7SL1

UNAVRBLDUR

Duration of SL unavailability due to remote processor outage in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVRBLDUR

Source Section

C7SL1

UNAVSLFDUR

Duration of SL unavailability due to link failure in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVSLFDUR

Source Section

C7SL1

UNEXPDUS_SS7HSLMT3

Number of unexpected SSCOP PDUs received

Data Source

MSC_I0G20_APG40

Source Field

UNEXPDUS

Source Section

SS7HSLMT3

MSC_SS7LinkSet Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7LinkSet entity.

C7_LSTL_AvgRX

Average C7 Link Received Traffic (Erlangs)

Calculation

`mean(MSC_SS7Link, C7_SLTL_RX)`

C7_LSTL_AvgTX

Average C7 Link Transmitted Traffic (Erlangs)

Calculation

`mean(MSC_SS7Link, C7_SLTL_TX)`

Critical_Carried

critical Carried

Calculation

`0.4`

DIMENSION

Dimensioning Parameter

Calculation

```
WM_FCAST_DIMENSION(instance_id, TimeAndElement.timestamp)
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

```
""
```

GROWTH

The Growth in Erlangs per Week for Linear Regression

Calculation

```
WM_FCAST_GROWTH(instance_id) * 3600 * 24 * 7
```

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

Link_Unavailable

Link UnAvailability in LinkSet

Calculation

```
AGGR( MSC_SS7Link, UNAVAILDUR )
```

Link_Usage

Sum of TX and RX Usage

Calculation

```
AGGR(MSC_SS7Link, Link_Usage)
```

Links_Q

Number of assigned SLs (Q aggregator)

Calculation

```
LINKS
```

Ln_Correlation

Correlation co-efficient

Calculation

```
WM_FCAST_CORRELATION(instance_id)
```

Ln_Exhaust_Date

Exhaustion Date based on Critical Traffic

Calculation

```
dateToString(stringToDate(TimeAndElement.tstamp, "%Y-%m-%d") +  
(int)(vsum(Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24)), "%Y-%m-%d")
```

Ln_Exhaust_Days

Number of Days until LinkSet Exhausts, based on Critical Traffic

Calculation

```
vsum((int) vsum(Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24), -7)
```

MSUS

Number of MSU received and Transmitted Per LSET

Calculation

```
AGGR(MSC_SS7Link, MSUS)
```

Nominal_Capacity

Nominal Capacity based on specified Max Nominal erlangs Per LSET

Calculation

```
0.4 * NumLinks
```

NSLFA

Number of SL failures, all reasons.

Calculation

```
AGGR(MSC_SS7Link, NSLFA)
```

NumberMSUsReceived

Number of MSU's received

Calculation

`nullValue (AGGR (MSC_SS7Link, NMSURE_C7SL1), MSURECD)`

NumberMSUsTransmitted

Number of MSU's transmitted

Calculation

`nullValue (AGGR (MSC_SS7Link, NMSUTR_C7SL1), AGGR (MSC_SS7Link, MSUTRAN_MSC_C7Link))`

NumberSLFailures

Number of SL failures, all reasons

Calculation

`nullValue (AGGR (MSC_SS7Link, NSLFA), AGGR (MSC_SS7Link, NMDCLFLR))`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

NumLinks

Number of Links Per Linkset

Calculation

`count (MSC_SS7Link)`

PercentageLinkAvailability

Signalling Link Unavailability Duration

Calculation

`100 * (1 - (nullValue (AGGR (MSC_SS7Link, UNAVAILDUR), (AGGR (MSC_SS7Link, DRDCLFLR) * 10)) / (1.0 * (PERLEN * 60))))`

PercentageLinksetInService

Percentage Linkset In Service

Calculation

$$(100 * (\text{nullValue}(\text{AGGR}(\text{MSC_SS7Link}, \text{ASL-DUR}), (\text{AGGR}(\text{MSC_SS7Link}, \text{TLNKACTV}) * 10)) / (1.0 * (\text{PERLEN} * 60))))$$

RX_AvgLink

Total (RX) LinkSet Usage per Link

Calculation

$$\text{C7_LSTL_AvgRX} / (1.0 * \text{NumLinks})$$

RX_MSUS

RX MSUS For all Links

Calculation

$$\text{AGGR}(\text{MSC_SS7Link}, \text{NMSURE})$$

RX_Octets

RX SIF/SIO Octets for all Links

Calculation

$$\text{AGGR}(\text{MSC_SS7Link}, \text{NSIFSRE})$$

Sample_Size

The number of Samples in the Regression

Calculation

$$\text{WM_FCAST_SAMPLES}(\text{instance_id})$$

TX_AvgLink

Total (TX) LinkSet Usage per Link

Calculation

$$\text{C7_LSTL_AvgTX} / (1.0 * \text{NumLinks})$$

TX_MSUS

TX MSUS For all Links

Calculation

$$\text{AGGR}(\text{MSC_SS7Link}, \text{NMSUTR})$$

TX_Octets

TX SIF/SIO Octets for all Links

Calculation

AGGR(MSC_SS7Link, NSIFTR)

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC_SS7LinkSet Peg Counts

The following is a list of peg counts for the MSC_SS7LinkSet entity.

ASPADUR_MSC

Duration of adjacent SP inaccessible in seconds

Data Source

MSC_IOG20_APG40

Source Field

ASPADUR

Source Section

C7ADJSLP

ASPINA_MSC

Number of occurrences of adjacent SP inaccessible

Data Source

MSC_IOG20_APG40

Source Field

ASPINA

Source Section

C7ADJSLP

AVLINKS

Number of currently available links (ACT)

Data Source

MSC_IOG20_APG40

Source Field

AVLINKS

Source Section

SS7LS

AVLINKS_SS7HSLS

Number of currently available links (ACT)

Data Source

MSC_IOG20_APG40

Source Field

AVLINKS

Source Section

SS7HSLS

CLUSTERCODE_MSC_SS7LS

SS7 Link Cluster code

Data Source

MSC_IOG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7LS

ICUICELS_SS7HSLS

Total number of incoming (received) ATM user information (UI) cells

Data Source

MSC_IOG20_APG40

Source Field

ICUICELS

Source Section

SS7HSLS

INCCELLS_SS7HSLS

Total number of incoming (received) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

INCCELLS

Source Section

SS7HSLS

LINKS

Number of assigned SLs

Data Source

MSC_IOG20_APG40

Source Field

LINKS

Source Section

SS7LS

LINKS_SS7HSLS

Number of assigned signalling links

Data Source

MSC_IOG20_APG40

Source Field

LINKS

Source Section

SS7HSLS

LSMTCST

Maintenance state (same as 'link set service status')

Data Source

MSC_IQG20_APG40

Source Field

LSMTCST

Source Section

SS7LS

LSMTCST_SS7HSLS

Maintenance state (same as 'link set service status')

Data Source

MSC_IQG20_APG40

Source Field

LSMTCST

Source Section

SS7HSLS

MEMBERCODE_MSC_SS7LS

SS7 Cluster Member Code

Data Source

MSC_IQG20_APG40

Source Field

MEMBERCODE

Source Section

SS7LS

MSC_RELEASE

Release

MSGSRCVD_SS7HSLS

Number of MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

MSGSRCVD

Source Section

SS7HSLS

MSGSTRAN_SS7HSLS

Number of MTP3 messages transmitted, including those for which retransmissions of SSCOP SD PDUs

Data Source

MSC_IOG20_APG40

Source Field

MSGSTRAN

Source Section

SS7HSLS

MSURECD

Number of MSU's received

Data Source

MSC_IOG20_APG40

Source Field

MSURECD

Source Section

SS7LS

MSURETRN

Number of MSU's retransmitted

Data Source

MSC_IQG20_APG40

Source Field

MSURETRN

Source Section

SS7LS

MSUTRAN

Number of MSU's transmitted, (retransmission not included)

Data Source

MSC_IQG20_APG40

Source Field

MSUTRAN

Source Section

SS7LS

N10SCAN_MSC_C7LinkSet

Number of 10 sec. scans

Data Source

MSC_IQG20_APG40

Source Field

N10SCAN

Source Section

SS7LS

N10SCAN_SS7HSLS

Number of 10 sec scans

Data Source

MSC_IQG20_APG40

Source Field

N10SCAN

Source Section

SS7HSLS

OGUICELS_SS7HSLS

Total number of outgoing (transmitted) ATM user information (UI) cells

Data Source

MSC_IQG20_APG40

Source Field

OGUICELS

Source Section

SS7HSLS

OOSLINKS

Number of links in the Out-of-Service (OSS) Maintenance State

Data Source

MSC_IQG20_APG40

Source Field

OOSLINKS

Source Section

SS7LS

OOSLINKS_SS7HSLS

Number of links in the out-of-service (OOS) maintenance state

Data Source

MSC_IOG20_APG40

Source Field

OOSLINKS

Source Section

SS7HSLS

OUTCELLS_SS7HSLS

Total number of outgoing (transmitted) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

OUTCELLS

Source Section

SS7HSLS

PDUOCTRC_SS7HSLS

Total number of SSCOP PDU octets received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTRC

Source Section

SS7HSLS

PDUOCTTR_SS7HSLS

Total number of SSCOP PDU octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTTR

Source Section

SS7HSLS

PDUSRCVD_SS7HSLS

Total number of SSCOP PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUSRCVD

Source Section

SS7HSLS

PDUSTRAN_SS7HSLS

Total number of SSCOP PDUs transmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUSTRAN

Source Section

SS7HSLS

PERLEN

Period Length

RCVDOCT

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7LS

RECVD OCT_SS7HSLS

Number of SIF and SIO octets for MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7HSLS

RETRNOCT

Number of SIF, SIO, LI, FSN, and BSN octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

RETRNOCT

Source Section

SS7LS

SDOCTRCV_SS7HSLS

Number of SSCOP SD PDU octets received

Data Source

MSC_IOG20_APG40

Source Field

SDOCTRCV

Source Section

SS7HSLS

SDOCTRTR_SS7HSLS

Number of SSCOP SD PDU octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

SDOCTRTR

Source Section

SS7HSLS

SDOCTTRN_SS7HSLS

Number of SSCOP SD PDU octets transmitted, including retransmissions

Data Source

MSC_IOG20_APG40

Source Field

SDOCTTRN

Source Section

SS7HSLS

SDPDURCV_SS7HSLS

Number of SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

SDPDURCV

Source Section

SS7HSLS

SDPDURTR_SS7HSLS

Number of SSCOP SD PDUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

SDPDURTR

Source Section

SS7HSLS

SDPDUTRN_SS7HSLS

Number of SSCOP SD PDUs transmitted, including retransmissions

Data Source

MSC_IQG20_APG40

Source Field

SDPDUTRN

Source Section

SS7HSLS

STUNADURAT_MSC

Duration of unavailability of signalling linkset in seconds

Data Source

MSC_IQG20_APG40

Source Field

STUNADURAT

Source Section

C7SLSET

SYS7IND_MSC_C7ADJSLP

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7ADJSLP

SYS7IND_MSC_C7SLSET

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SLSET

TDLSINAC

Total duration of LS inactivity due to no links in LS are active in 10 sec. Units

Data Source

MSC_IOG20_APG40

Source Field

TDLSINAC

Source Section

SS7LS

TDLSINAC_SS7HSLS

Total duration of LS inactivity due to no links in LS are active in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDLSINAC

Source Section

SS7HSLS

TRANOCT

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7LS

TRANOCT_SS7HSLS

Number of SIF and SIO octets for MTP3 messages transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7HSLS

UAVLINKS

Number of links in the Unavailable (UNAV) maintenance state

Data Source

MSC_IOG20_APG40

Source Field

UAVLINKS

Source Section

SS7LS

UAVLINKS_SS7HSLS

Number of links in the unavailable (UNAV) maintenance state

Data Source

MSC_I0G20_APG40

Source Field

UAVLINKS

Source Section

SS7HSLS

MSC_SS7RouteSet Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7RouteSet entity.

C7_RSAV_%

%C7 RouteSet Availability Time

Calculation

$100 * (1 - (STINADURAT_MSC / (60.0 * NI.MSC.PERLEN)))$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$PERLEN / (1.0 * 60)$

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC_SS7RouteSet Peg Counts

The following is a list of peg counts for the MSC_SS7RouteSet entity.

MSC_RELEASE

Release

PERLEN

Period Length

STINACNT_MSC

Number of occurrences of unavailability of route set to a given destination

Data Source

MSC_IQG20_APG40

Source Field

STINACNT

Source Section

C7RTSET

STINADURAT_MSC

Duration of unavailability of route set in seconds

Data Source

MSC_IOG20_APG40

Source Field

STINADURAT

Source Section

C7RTSET

SYS7IND_MSC_C7RTSET

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7RTSET

MSCOutTrunk Primitive Calculations

The following is a list of primitive calculations for the MSCOutTrunk entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

MSCOutTrunk Peg Counts

The following is a list of peg counts for the MSCOutTrunk entity.

BANSWCNT

Number of B - answers

CONVLACC

Accumulated traffic level after B - answer

IDISCCNT

Number of rejected calls

MSC_RELEASE

Release

OCONGCNT

Number of unsuccessful seizure attempts of outgoing individual

ODISCCNT

Number of disconnections of outgoing individual in register position

OTTIME

Accumulated seizure time of outgoing individual in register position

PERLENSEC

Period Length

SCANCNT

Number of accumulations of the level counters

SCANNINT

Interval between scannings in seconds

THCONCNT

Number of through connections

TRALACC

Accumulated traffic level after through connection

MSCTrunkDest Primitive Calculations

The following is a list of primitive calculations for the MSCTrunkDest entity.

BANSWCNT_TrunkDest

Number of B - answers

Calculation

```
nullValue(BANSWCNT, AGGR(MSCOutTrunk, BANSWCNT))
```

CONVLACC_TrunkDest

Accumulated traffic level after B - answer

Calculation

```
nullValue(CONVLACC, AGGR(MSCOutTrunk, CONVLACC))
```

DestinationTraffic_AfterBAnsw

Traffic in Erlang from B-answer to release

Calculation

```
CONVLACC_TrunkDest / SCANCNT_TrunkDest
```

DestinationTraffic_BeforeBAnsw

Traffic in Erlang from reaching the EOS state waiting for B-answer to release.

Calculation

```
TRALACC_TrunkDest / SCANCNT_TrunkDest
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IDISCCNT_TrunkDest

Number of rejected calls

Calculation

```
nullValue(IDISCCNT, AGGR(MSCOutTrunk, IDISCCNT))
```

INTERVALS_TRDIP

Number of 60 minute intervals covered (from TRDIP data)

Calculation

```
PERLEN_TRDIP / (1.0 * 60)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT()
```

NUMHOURS

of hours in Summation Data

Calculation

OCONGCNT_TrunkDest

Number of unsuccessful seizure attempts of outgoing individual

Calculation

```
nullValue(OCONGCNT, AGGR(MSCOutTrunk, OCONGCNT))
```

ODISCCNT_TrunkDest

Number of disconnections of outgoing individual in register position

Calculation

```
nullValue(ODISCCNT, AGGR(MSCOutTrunk, ODISCCNT))
```

OTTIME_TrunkDest

Accumulated seizure time of outgoing individual in register position

Calculation

```
nullValue(OTTIME, AGGR(MSCOutTrunk, OTTIME))
```

SCANCNT_TrunkDest

Number of accumulations of the level counters

Calculation

```
nullValue(SCANCNT, AGGR(MSCOutTrunk, SCANCNT) * 1.0 / count(MSCOutTrunk))
```

SCANNINT_TrunkDest

Interval between scanings in seconds

Calculation

```
nullValue(SCANNINT, AGGR(MSCOutTrunk, SCANNINT))
```

THCONCNT_TrunkDest

Number of through connections

Calculation

```
nullValue(THCONCNT, AGGR(MSCOutTrunk, THCONCNT))
```

TRALACC_TrunkDest

Accumulated traffic level after through connection

Calculation

```
nullValue(TRALACC, AGGR(MSCOutTrunk, TRALACC))
```

MSCTrunkDest Peg Counts

The following is a list of peg counts for the MSCTrunkDest entity.

BANSWCNT

Number of B - answers

Data Source

MSC_TRDIP

Source Field

BANSWCNT

Source Section

ASC_TRDIP

CONVLACC

Accumulated traffic level after B - answer

Data Source

MSC_TRDIP

Source Field

CONVLACC

Source Section

ASC_TRDIP

IDISCCNT

Number of rejected calls

Data Source

MSC_TRDIP

Source Field

IDISCCNT

Source Section

ASC_TRDIP

MSC_Release

Release

OCONGCNT

Number of unsuccessful seizure attempts of outgoing individual

Data Source

MSC_TRDIP

Source Field

OCONGCNT

Source Section

ASC_TRDIP

ODISCCNT

Number of disconnections of outgoing individual in register position

Data Source

MSC_TRDIP

Source Field

ODISCCNT

Source Section

ASC_TRDIP

OTTIME

Accumulated seizure time of outgoing individual in register position

Data Source

MSC_TRDIP

Source Field

OTTIME

Source Section

ASC_TRDIP

PERLEN_TRDIP

Period Length (of TRDIP data)

SCANCNT

Number of accumulations of the level counters

Data Source

MSC_TRDIP

Source Field

SCANCNT

Source Section

ASC_TRDIP

SCANNINT

Interval between scannings in seconds

Data Source

MSC_TRDIP

Source Field

SCANNINT

Source Section

ASC_TRDIP

THCONCNT

Number of through connections

Data Source

MSC_TRDIP

Source Field

THCONCNT

Source Section

ASC_TRDIP

TRALACC

Accumulated traffic level after through connection

Data Source

MSC_TRDIP

Source Field

TRALACC

Source Section

ASC_TRDIP

MSCTrunkType Primitive Calculations

The following is a list of primitive calculations for the MSCTrunkType entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

MSCTrunkType Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSCTrunkType Peg Counts

The following is a list of peg counts for the MSCTrunkType entity.

MSC_RELEASE

Release

NDISS

Number of disturbances

Data Source

MSC_IQG20_APG40

Source Field

NDISS

Source Section

TRUNKSUP

NDISSBLOC

Number of blockings

Data Source

MSC_IQG20_APG40

Source Field

NDISSBLOC

Source Section

TRUNKSUP

NFAUSBLOC

Number of signalling faults

Data Source

MSC_IQG20_APG40

Source Field

NFAUSBLOC

Source Section

TRUNKSUP

NNOTSEIZE

Number of not seized trunks

Data Source

MSC_IQG20_APG40

Source Field

NNOTSEIZE

Source Section

TRUNKSUP

NQUAS

Number of indications

Data Source

MSC_IQG20_APG40

Source Field

NQUAS

Source Section

TRUNKSUP

NQUASBLOC

Number of blockings

Data Source

MSC_IQG20_APG40

Source Field

NQUASBLOC

Source Section

TRUNKSUP

PERLEN

Period Length

Multiplex_Section Primitive Calculations

The following is a list of primitive calculations for the Multiplex_Section entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

Higher_Order_Path ID

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Multiplex_Section Peg Counts

The following is a list of peg counts for the Multiplex_Section entity.

MSFBBE

Number of background block errors multiplex section far end

Data Source

BSC_IQG20_APG40

Source Field

MSFBBE

Source Section

SDIPMS

MSFES

Number of errored seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFES

Source Section

SDIPMS

MSFSES

Number of severely errored seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFSES

Source Section

SDIPMS

MSFUAS

Number of unavailable seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFUAS

Source Section

SDIPMS

MSFUAV

Number of unavailable events far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFUAV

Source Section

SDIPMS

MSNBBE

Number of background block errors multiplex section near end

Data Source

BSC_IQG20_APG40

Source Field

MSNBBE

Source Section

SDIPMS

MSNES

Number of errored seconds near end multiplex section.

Data Source

BSC_IQG20_APG40

Source Field

MSNES

Source Section

SDIPMS

MSNSES

Number of severely errored seconds near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNSES

Source Section

SDIPMS

MSNUAS

Number of unavailable seconds near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNUAS

Source Section

SDIPMS

MSNUAV

Number of unavailable events near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNUAV

Source Section

SDIPMS

PERLEN

Period Length

SMI

Flag indicating if any suspect marked intervals occurred during 24 h measurement period multiplex section

Data Source

BSC_IQG20_APG40

Source Field

SMI

Source Section

SDIPMS

NB_MSC Primitive Calculations

The following is a list of primitive calculations for the NB_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

NB_MSC Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

NB_MSC Peg Counts

The following is a list of peg counts for the NB_MSC entity.

MSC_RELEASE

Release

NBIRASDHTOT

Number of incoming relocation signaling to signaling attempts from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBIRASDHTOT

Source Section

NBRMSCSRNS

NBIRATCHTOT

Number of incoming relocation traffic to traffic attempts from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBIRATCHTOT

Source Section

NBRMSCSRNS

NBNSCASUCC

A successful channel assignment should be counted in non-anchor MSC, if RANAP RAB ASSIGNMENT COMPLETE message is sent on the E-interface and if the B-answer is sent on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NBNSCASUCC

Source Section

NBRMSCSRNS

NBNSCATOT

In a subsequent channel assignment attempt should be counted in non-anchor MSC, when the request for the handover number is received.

Data Source

MSC_IQG20_APG40

Source Field

NBNSCATOT

Source Section

NBRMSCSRNS

NBORASDHTOT

Number of subsequent relocation signaling to signaling attempts to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBORASDHTOT

Source Section

NBRMSCSRNS

NBORATCHTOT

Number of subsequent relocation traffic to traffic attempts to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBORATCHTOT

Source Section

NBRMSCSRNS

NBRASDHTOT

Number of basic RELOCATION signaling to signaling attempts to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRASDHTOT

Source Section

NBRMSCSRNS

NBRATCHTOT

Number of basic RELOCATION traffic to traffic attempts to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRATCHTOT

Source Section

NBRMSCSRNS

NBRSASDHSUCC

Number of successful basic relocation signaling to signaling to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRSASDHSUCC

Source Section

NBRMSCSRNS

NBRSATCHSUCC

Number of successful basic relocation traffic to traffic to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRSATCHSUCC

Source Section

NBRMSCSRNS

NBSCHASUCC

A subsequent channel assignment Success should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NBSCHASUCC

Source Section

NBRMSCSRNS

NBSCHATOT

A subsequent channel assignment attempt should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NBSCHATOT

Source Section

NBRMSCSRNS

NBSIRASDHSUCC

Number of successful incoming relocations signaling to signaling from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC)

Data Source

MSC_IQG20_APG40

Source Field

NBSIRASDHSUCC

Source Section

NBRMSCSRNS

NBSIRATCHSUCC

Number of successful incoming relocations traffic to traffic from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBSIRATCHSUCC

Source Section

NBRMSCSRNS

NBSORASDHSUCC

Number of successful subsequent relocations signaling to signaling to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBSORASDHSUCC

Source Section

NBRMSCSRNS

NBSORATCHSUCC

Number of successful subsequent relocations traffic to traffic to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBSORATCHSUCC

Source Section

NBRMSCSRNS

NBSRASDHTOT

Number of subsequent relocation signaling to signaling attempts from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRASDHTOT

Source Section

NBRMSCSRNS

NBSRATCHTOT

Number of subsequent relocation traffic to traffic attempts from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATCHTOT

Source Section

NBRMSCSRNS

NBSRATSDHTOT

Number of subsequent relocation signaling to signaling attempts from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATSDHTOT

Source Section

NBRMSCSRNS

NBSRATTCHTOT

Number of subsequent relocation traffic to traffic attempts from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATTCHTOT

Source Section

NBRMSCSRNS

NBSSRAATCHSUCC

Number of successful subsequent relocation traffic to traffic from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRAATCHSUCC

Source Section

NBRMSCSRNS

NBSSRASDHSUCC

Number of successful subsequent relocation signaling to signaling from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRASDHSUCC

Source Section

NBRMSCSRNS

NBSSRATSDHSUCC

Number of successful subsequent relocation signaling to signaling from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRATSDHSUCC

Source Section

NBRMSCSRNS

NBSSRATTCHSUCC

Number of successful subsequent relocation traffic to traffic from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRATTCHSUCC

Source Section

NBRMSCSRNS

NCELHND SUCC

Number of successful handovers to the target cell from this serving cell.

Data Source

MSC_IQG20_APG40

Source Field

NCELHND SUCC

Source Section

NBRCELLST

NCELHND TOT

Number of handover attempts to the target cell from this serving cell

Data Source

MSC_IQG20_APG40

Source Field

NCELHNDTOT

Source Section

NBRCELLST

NNBRBUGASCSUCC

Nr of succ basic UMTS to GSM hos on signalling chs to neighbouring MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASCSUCC

Source Section

NBRMSCUGHO

NNBRBUGASCTOT

Nr of basic UMTS to GSM ho attempts on signalling chs to neighbouring MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASCTOT

Source Section

NBRMSCUGHO

NNBRBUGASUCC

Number of successful basic UMTS to GSM handovers to neighbouring MSC/VLR server

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASUCC

Source Section

NBRMSCUGHO

NNBRBUGATOT

Number of basic UMTS to GSM handover attempts to neighbouring MSC/VLR server

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGATOT

Source Section

NBRMSCUGHO

NNBRBUGSTSUC

Nr of succ basic hos from signalling ch to traffic ch to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGSTSUC

Source Section

NBRMSCUGHO

NNBRBUGSTTOT

Nr of basic ho attempts from signalling ch to traffic ch to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGSTTOT

Source Section

NBRMSCUGHO

NNBRHBAISDHSUCC

Number of successful incoming handovers on signalling channels from neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBAISDHSUCC

Source Section

NBRMSCLST

NNBRHBAISDHTOT

incoming handover attempts on signalling channels from neighboring MSC. Incremented after identification of target and serving cell

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBAISDHTOT

Source Section

NBRMSCLST

NNBRHBANSUCC

Number of successful basic handovers to a neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBANSUCC

Source Section

NBRMSCLST

NNBRHBANTOT

Number of basic handover attempts to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBANTOT

Source Section

NBRMSCLST

NNBRHBAOSDHSUCC

Number of successful basic handovers on signalling channels (SDCCH) to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBAOSDHSUCC

Source Section

NBRMSCLST

NNBRHBAOSDHTOT

Number of basic handover attempts on signalling channels (SDCCH) to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBAOSDHTOT

Source Section

NBRMSCLST

NNBRHBSTSUCC

Number of successful basic handovers to a neighbouring MSC from SDCCH to TCH

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBSUCCESS

Source Section

NBRMSCLST

NNBRHBSUCCESS

Number of basic handover attempts to a neighbouring MSC from SDCCH to TCH

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBSUCCESS

Source Section

NBRMSCLST

NNBRHBSUCCESS

Number of successful basic handovers to a neighbouring MSC on TCH before through connection

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBSUCCESS

Source Section

NBRMSCLST

NNBRHBSUCCESS

Number of basic handover attempts to neighbouring MSC on TCH before through connection

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBTTTOT

Source Section

NBRMSCLST

NNBRHINASUCC

Number of successful incoming handovers from neighboring MSC on signalling and traffic channels

Data Source

MSC_IQG20_APG40

Source Field

NNBRHINASUCC

Source Section

NBRMSCLST

NNBRHINATOT

Number of incoming handover attempts from neighboring MSC on signalling and traffic channels

Data Source

MSC_IQG20_APG40

Source Field

NNBRHINATOT

Source Section

NBRMSCLST

NNBRHSANSUCC

Number of successful subsequent handovers from the neighbouring MSC back to anchor MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSANSUCC

Source Section

NBRMSCLST

NNBRHSANTOT

Number of subsequent handover attempts from neighbouring MSC back to anchor MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSANTOT

Source Section

NBRMSCLST

NNBRHSISDHSUCC

successful subsequent handovers on signalling channels (SDCCH), from neighbouring MSC back to anchor MSC, for each serving MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSISDHSUCC

Source Section

NBRMSCLST

NNBRHSISDHTOT

subsequent handover attempts on signalling channels (SDCCH), from neighbouring MSC back to anchor MSC for each serving MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSISDHTOT

Source Section

NBRMSCLST

NNBRHSNASUCC

Number of successful subsequent handovers to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSNASUCC

Source Section

NBRMSCLST

NNBRHSNATOT

Number of subsequent handover attempts to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSNATOT

Source Section

NBRMSCLST

NNBRHSOSDHSUCC

Number of successful subsequent handovers on signalling channels to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSOSDHSUCC

Source Section

NBRMSCLST

NNBRHSOSDHTOT

subsequent handover attempts on signalling channels to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSOSDHTOT

Source Section

NBRMSCLST

NNBRHTHISDHSUCC

successful subsequent handovers on signalling channels (SDCCH), from a neighbouring MSC to a third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRHTHISDHSUCC

Source Section

NBRMSCLST

NNBRHTHISDHTOT

subsequent handover attempts on signalling channels (SDCCH), from a neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISDHTOT

Source Section

NBRMSCLST

NNBRHTHISUCC

Number of successful subsequent handovers from neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISUCC

Source Section

NBRMSCLST

NNBRHTHISITOT

Number of subsequent handover attempts from neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISITOT

Source Section

NBRMSCLST

NNBRIHOATCHTOT

Number of incoming handover attempts from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is traffic to traffic and the HO is WCDMA to GSM.

Data Source

MSC_IQG20_APQ40

Source Field

NNBRIHQATCHTOT

Source Section

NBRMSCUGHQ

NNBRISDHHQATOT

Number of incoming handover attempts from signaling to signaling channel from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC), in case the call type is signaling to signaling and the HQ is WCD

Data Source

MSC_IQG20_APQ40

Source Field

NNBRISDHHQATOT

Source Section

NBRMSCUGHQ

NNBRITCHHQASUCC

Number of successful incoming handovers from signaling to signaling channel from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is signaling to signaling and the HQ is WCDM

Data Source

MSC_IQG20_APQ40

Source Field

NNBRITCHHQASUCC

Source Section

NBRMSCUGHQ

NNBRNSUGSCASUCC

A successful channel assignment should be counted in non-anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is sent on the E-interface and if the B-answer is sent on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NNBRNSUGSCASUCC

Source Section

NBRMSCUGHO

NNBRNUGSCATOT

A subsequent channel assignment attempt should be counted in non- anchor MSC, when the request for the handover number is received.

Data Source

MSC_IQG20_APG40

Source Field

NNBRNUGSCATOT

Source Section

NBRMSCUGHO

NNBRSCHARSUCC

Number of successful subsequent channel assignments using a circuit connection to a neighboring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSCHARSUCC

Source Section

NBRMSCLST

NNBRSCHARTOT

Number of subsequent TCH assignment attempts using a circuit connection to neighboring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSCHARTOT

Source Section

NBRMSCLST

NNBRSCHASSUCC

successfully sent subsequent TCH assignments using a circuit connection to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSCHASSUCC

Source Section

NBRMSCLST

NNBRSCHASTOT

Number of sent subsequent TCH assignment attempts using a circuit connection to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSCHASTOT

Source Section

NBRMSCLST

NNBRSIHOATCHSUCC

Number of successful incoming handover attempts from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is traffic to traffic and the HO is WCDMA to GSM.

Data Source

MSC_IQG20_APQ40

Source Field

NNBRSIHOATCHSUCC

Source Section

NBRMSCUGHO

NNBRSUGSCASUCC

A successful subsequent channel assignment should be counted in anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is received on the E-interface and if the B-answer is received on the PSTN/ISDN.

Data Source

MSC_IQG20_APQ40

Source Field

NNBRSUGSCASUCC

Source Section

NBRMSCUGHO

NNBRSUGSSUCC

Nr of succ subsequent UMTS to GSM hos on signalling ch to neigh MSC

Data Source

MSC_IQG20_APQ40

Source Field

NNBRSUGSSUCC

Source Section

NBRMSCUGHO

NNBRSUGSTOT

Nr of subsequent UMTS to GSM ho attempts on signalling ch to neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSUGSTOT

Source Section

NBRMSCUGHO

NNBRSUGSUCC

Nr of succ subsequent UMTS to GSM hos to neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSUGSUCC

Source Section

NBRMSCUGHO

NNBRSUGTOT

Nr of subsequent UMTS to GSM ho attempts to neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSUGTOT

Source Section

NBRMSCUGHO

NNBRUGSCATOT

A subsequent channel assignment attempt should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NNBRUGSCATOT

Source Section

NBRMSCUGHO

NNGSUSCASUCC

A successful subsequent channel assignment should be counted in anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is received on the E-interface and if the B-answer is received on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NNGSUSCASUCC

Source Section

NBRMSCGUH

NNGUHASUCC

Nr of succ subsequent GSM to UMTS ho from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHASUCC

Source Section

NBRMSCGUH

NNGUHATOT

Nr of subsequent GSM to UMTS ho att from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NNGUHATOT

Source Section

NBRMSCGUH

NNGUHBSUCC

Number of successful basic GSM to UMTS handovers attempts to neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHBSUCC

Source Section

NBRMSCGUH

NNGUHBTOT

Number of basic GSM to UMTS handovers

Data Source

MSC_IOG20_APG40

Source Field

NNGUHBTOT

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of succ incoming GSM to UMTS hos on signalling ch from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of inc GSM to UMTS ho attempts on sign ch from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of succ incoming GSM to UMTS hos from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of incoming GSM to UMTS ho attempts from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHITOT

Source Section

NBRMSCGUH

NNGUHQSSUCC

Nr of succ basic GSM to UMTS hos from signalling to signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSSUCC

Source Section

NBRMSCGUH

NNGUHQSTOT

Nr of basic GSM to UMTS ho att from signalling to signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSTOT

Source Section

NBRMSCGUH

NNGUHQSSUCC

Nr of succ subs GSM to UMTS hos on sign ch from neigh MSC back to anch MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSSUCC

Source Section

NBRMSCGUH

NNGUHTSTOT

Nr of subse GSM to UMTS ho att on sign ch from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSTOT

Source Section

NBRMSCGUH

NNGUHTSSUCC

Nr of succ subs GSM to UMTS ho from sign to sign ch from neigh MSC to third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSSUCC

Source Section

NBRMSCGUH

NNGUHTSTOT

Nr of subs GSM to UMTS ho att from sign to sign ch from neigh MSC to third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSTOT

Source Section

NBRMSCGUH

NNGUHTSUCC

Nr of succ subsequent GSM to UMTS hos from neigh MSC to third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHTSUCC

Source Section

NBRMSCGUH

NNGUHTTOT

Nr of subsequent GSM to UMTS ho attempts from neigh MSC to third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHTTOT

Source Section

NBRMSCGUH

NNGUSCATOT

Number of subsequent traffic channel assignment attempts using a circuit connection to neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NNGUSCATOT

Source Section

NBRMSCGUH

NNGUSTSUCC

Nr of succ basic GSM to UMTS hos from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NNGUSTSUCC

Source Section

NBRMSCGUH

NNGUSTTOT

Nr of basic GSM to UMTS ho attempts from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NNGUSTTOT

Source Section

NBRMSCGUH

NNSCHASUCC

Number of successful subsequent channel assignments using a circuit connection

Data Source

MSC_IOG20_APG40

Source Field

NNSCHASUCC

Source Section

NBRMSCLST

NNSCHATOT

Number of subsequent channel assignment attempts using a circuit connection to neighbouring MSC after GSM to UMTS handover

Data Source

MSC_IQG20_APG40

Source Field

NNSCHATOT

Source Section

NBRMSCLST

PERLEN

Period Length

NBCell Primitive Calculations

The following is a list of primitive calculations for the NBCell entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

HO_CAUSEALL

Number of Handovers (All Causes)

Calculation

vsum(HOTOKCL, HOTOLCL, HODWNQA, HOUPLQA, HOEXCTA, HOATTLSS, HOATTHSS)

HO_DIRRETRY

Number of Handovers Due to Directed Retry

Calculation

nullFloat()

HO_DWNLKLVL

Number of Handovers Due to Downlink Level

Calculation

`nullFloat()`

HO_LOST

MS lost during handover

Calculation

`vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVERSUC)`

HO_SUC%

Percentage successful handovers

Calculation

`HOVERSUC * 100.0 / HOVERCNT`

HO_SUCBTCEL%

Percentage of successful assignment HO to better cell

Calculation

`HOSUCBCL * 100.0 / HOASBCL`

HO_SUCHIHR%

Percentage of successful HO at High HO Rate

Calculation

`HOSUCHR * 100.0 / HOATTHR`

HO_SUCWRCEL%

Percentage of successful assignment HO to worse cell

Calculation

`HOSUCWCL * 100.0 / HOASWCL`

HO_UPLNKLVL

Number of Handovers Due to Uplink Level

Calculation

`nullFloat()`

HOE_LOST

MS lost at BSC external handover

Calculation

```
protect(decode(NBTYPE,"E", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat()))
```

HOE_LOST%

MS lost at BSC external handover %

Calculation

```
100 * protect(decode(NBTYPE,"E", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat())) / (1.0 * protect(decode(NBTYPE,"E", HOVERCNT, null-  
Float())))
```

HOE_SUC

BSC external handover successful attempts

Calculation

```
protect(decode(NBTYPE,"E", HOVERCNT, nullFloat() ))
```

HOE_TOT

BSC external handover attempts

Calculation

```
protect(decode(NBTYPE,"E", HOVERCNT, nullFloat() ))
```

HOI_LOST

MS lost at BSC internal handover

Calculation

```
protect(decode(NBTYPE,"I", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat()))
```

HOI_LOST%

MS lost at BSC internal handover

Calculation

```
100 * protect(decode(NBTYPE,"I", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat())) / (1.0 * protect(decode(NBTYPE,"I", HOVERCNT, null-  
Float())))
```

HOI_SUC

BSC internal handover successful attempts

Calculation

`protect (decode (NBTYPE, "I", HOVERSUC, nullFloat()))`

HOI_TOT

BSC internal handover attempts

Calculation

`protect (decode (NBTYPE, "I", HOVERCNT, nullFloat()))`

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

LocalName

NBCell Name

Calculation

`LocalKey`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull (PERLEN) ? nullString() : "EricssonGSM"`

NBCell Peg Counts

The following is a list of peg counts for the NBCell entity.

BSS_RELEASE

Release

HOASBCL

Assign Handover Att to Better cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOASBCL

Source Section

NICELASS,NECELASS

HOASWCL

Assign Handover to Worse cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOASWCL

Source Section

NICELASS,NECELASS

HOATTHR

Number of handovers at high handover rate. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTHR

Source Section

NICELHOEX,NECELHOEX

HOATTHSS

HO attempts when serving cell is a high signal strength cell. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTHSS

Source Section

NICELHOEX,NECELHOEX

HOATTLSS

HO attempts when serving cell is a low signal strength cell. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTLSS

Source Section

NICELHOEX,NECELHOEX

HOATTSHOULDUTRAN

Number of handover attempts to a neighbouring UTRAN FDD cell due to the Service Handover value is 'should'.

Data Source

BSC_IOG20_APG40

Source Field

HOATTSHOULDUTRAN

Source Section

NUCELLREL

HODUPFT

Number of handover attempts during a predefined time (10 seconds). When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IOG20_APG40

Source Field

HODUPFT

Source Section

NECELHO,NECELHO

HODWNQA

Number of handovers at bad downlink quality. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IOG20_APG40

Source Field

HODWNQA

Source Section

NECELHO,NECELHO

HOEXCTA

Number of handovers due to exceeded time alignment. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOEXCTA

Source Section

NECELHO,NECELHO

HOREQCNTUTRAN

The number of handover required sent to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOREQCNTUTRAN

Source Section

NUCELLREL

HORTTOCH

handover attempts where MS returns to the old channel. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HORTTOCH

Source Section

NECELLREL,NICELLREL

HORTTOCHUTRAN

The number of handover attempts to the neighbouring UTRAN cell resulting in the MS returning to the old channel on the GSM cell.

Data Source

BSC_IQG20_APG40

Source Field

HORTTOCHUTRAN

Source Section

NUCELLREL

HOSUCBCL

successful assignment HOs to better cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCBCL

Source Section

NICELASS,NECELASS

HOSUCHR

Number of successful handovers at high handover rate. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCHR

Source Section

NICELHOEX,NECELHOEX

HOSUCWCL

successful assignment HOs to worse cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCWCL

Source Section

NICELASS,NECELASS

HOTOHCS

Number of non-urgency handovers to internal cell due to Hierarchical Cell Structure (HCS).When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOHCS

Source Section

NECELHO,NECELHO

HOTOKCL

Number of handovers to better K-cell . When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOKCL

Source Section

NECELHO,NECELHO

HOTOLCL

Number of handovers to better L-cell . When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOLCL

Source Section

NECELHO,NECELHO

HOUPLQA

Number of handovers at bad uplink quality. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOUPLQA

Source Section

NECELHO,NECELHO

HOVERCNT

Handover Atts to NCELL. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOVERCNT

Source Section

NECELLREL,NICELLREL

HOVERCNTUTRAN

The number of handover attempts to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOVERCNTUTRAN

Source Section

NUCELLREL

HOVERSUC

Succ Handover to NCELL. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOVERSUC

Source Section

NECELLREL,NICELLREL

HOVERSUCUTRAN

The number of successful handovers to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOVERSUCUTRAN

Source Section

NUCELLREL

NBTYPE

Neighbour cell type (I - Internal, E - External)

PERLEN

Period Length

SUCURGHOUTRAN

Number of successful handover attempts to the neighbour UTRAN FDD cell in case of urgency conditions.

Data Source

BSC_IQG20_APG40

Source Field

SUCURGHOUTRAN

Source Section

NUCELLREL

URGHOVERUTRAN

Number of handover attempts to the neighbour UTRAN FDD cell in case of urgency conditions.

Data Source

BSC_IQG20_APG40

Source Field

URGHOVERUTRAN

Source Section

NUCELLREL

NI Primitive Calculations

The following is a list of primitive calculations for the NI entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ProblemCode Primitive Calculations

The following is a list of primitive calculations for the ProblemCode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

ProblemCode Peg Counts

The following is a list of peg counts for the ProblemCode entity.

MSC_RELEASE

Release

NERRSIT

Number of protocol error situations not resulting in abort sending

Data Source

MSC_IOG20_APG40

Source Field

NERRSIT

Source Section

TCABO

PERLEN

Period Length

RECEIVED

Number of aborts received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCABO

SENT

Number of aborts sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCABO

QOS Primitive Calculations

The following is a list of primitive calculations for the QOS entity.

Ave_LLC_PDU_per_TBF

Average LLC-PDU per TBF (kb)

Calculation

$\text{NUMBERLLCPDU} / (1.0 * \text{NUMBERTBF})$

Ave_LLC_PDU_Throughput

Average LLC-PDU Throughput (kb/s)

Calculation

$\text{NUMBERLLCPDU} / (1.0 * \text{PFCLIFETIME})$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$\text{PERLEN} / (1.0 * 60)$

LocalName

BSCQOS Name

Calculation

LocalKey

Nof_TBF

No. of TBFs

Calculation

NUMBERTBF

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

QOS Peg Counts

The following is a list of peg counts for the QOS entity.

BSS_RELEASE

Release

NUMBERLLCPDU

Acc nr of LLC PDU octets transmitted by active PFCs with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

NUMBERLLCPDU

Source Section

BSCQOS

NUMBERTBF

Accumulated nr of TBFs that have carried active PFCs with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

NUMBERTBF

Source Section

BSCQOS

PERLEN

Period Length

PFCLIFETIME

Accumulated transmission time of all the LLC PDUs transmitted during an active PFC with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

PFCLIFETIME

Source Section

BSCQOS

Radio Primitive Calculations

The following is a list of primitive calculations for the Radio entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Radio Peg Counts

The following is a list of peg counts for the Radio entity.

Transiver_ID

Transiver ID , Integer between 0 and 11

Source Section

MOTS

RNCSTAT Primitive Calculations

The following is a list of primitive calculations for the RNCSTAT entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

RNCSTAT Peg Counts

The following is a list of peg counts for the RNCSTAT entity.

MSC_RELEASE

Release

NBSTSSMTOT

Number of received reset messages.

Data Source

MSC_IQG20_APG40

Source Field

NBSTSSMTOT

Source Section

RNCSTAT

NRNFRMSCCI

Number of successful RAB assignments for call from mobile subscriber.

Data Source

MSC_IQG20_APG40

Source Field

NRNFRMSCCI

Source Section

RNCSTAT

NRNFRMTOTI

Number of successful RAB assignments for call to mobile subscriber.

Data Source

MSC_IOG20_APG40

Source Field

NRNFRMTOTI

Source Section

RNCSTAT

NRNFRRRTOT

Number of received Reset Resource messages.

Data Source

MSC_IOG20_APG40

Source Field

NRNFRRRTOT

Source Section

RNCSTAT

NRNTIHRSUCC

Number of successful incoming relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTIHRSUCC

Source Section

RNCSTAT

NRNTIHRUSUCC

Number of successful incoming relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTIHRUSUCC

Source Section

RNCSTAT

NRNTLRCTOT

Number of Location Reporting Control messages sent.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRCTOT

Source Section

RNCSTAT

NRNTLRDRTOT

Number of Location Related Data Request messages sent.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRDRTOT

Source Section

RNCSTAT

NRNTLRDSUCC

Number of Location Related Data Response messages or Location Related Data Failure messages received.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRDSUCC

Source Section

RNCSTAT

NRNTLRSUCC

Number of Location Report messages containing Geographical Co-ordinates received.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRSUCC

Source Section

RNCSTAT

NRNTOHRSUCC

Number of successful outgoing relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTOHRSUCC

Source Section

RNCSTAT

NRNTOMSCCO

Total number of RAB assignments for call from mobile subscriber.

Data Source

MSC_IOG20_APG40

Source Field

NRNTOMSCCO

Source Section

RNCSTAT

NRNTOMTOTO

Total number of RAB assignments for call to mobile subscriber.

Data Source

MSC_IQG20_APG40

Source Field

NRNTOMTOTO

Source Section

RNCSTAT

NRNTORGSSUCC

Number of successful outgoing UMTS to GSM handover from the RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTORGSSUCC

Source Section

RNCSTAT

NRNTORRTOT

Number of sent Reset Resource messages.

Data Source

MSC_IQG20_APG40

Source Field

NRNTORRTOT

Source Section

RNCSTAT

NRNTRRCTOT

Number of received relocation cancel messages per source RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRCTOT

Source Section

RNCSTAT

NRNTRRRGTOT

Number of relocation required messages received for UMTS to GSM handover.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRRGTOT

Source Section

RNCSTAT

NRNTRRRTOT

Number of relocation required messages received.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRRTOT

Source Section

RNCSTAT

NRNTSRRTOT

Number of relocation request messages sent to the target RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTSRRTOT

Source Section

RNCSTAT

NRNTSRRUTOT

Number of relocation request messages sent to the target RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTSRRUTOT

Source Section

RNCSTAT

PERLEN

Period Length

RXOTS Primitive Calculations

The following is a list of primitive calculations for the RXOTS entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

RXOTS Peg Counts

The following is a list of peg counts for the RXOTS entity.

BSS_RELEASE

Release

CONCNT

Connection set up attempt

Data Source

BSC_IQG20_APG40

Source Field

CONCNT

Source Section

MOTS

CONERRCNT

Time out or radio link failure

Data Source

BSC_IQG20_APG40

Source Field

CONERRCNT

Source Section

MOTS

ID1_MOTS

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTS

ID2_MOTS

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTS

PERLEN

Period Length

SAE Primitive Calculations

The following is a list of primitive calculations for the SAE entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SAE Peg Counts

The following is a list of peg counts for the SAE entity.

ID1_MSC_SAE

Block number

Data Source

MSC_IOG20_APG40

Source Field

ID1

Source Section

SAE

ID2_MSC_SAE

SAE 500

Data Source

MSC_IOG20_APG40

Source Field

ID2

Source Section

SAE

MSC_RELEASE

Release

NCALLS_MSC_SAE

Number of seizure attempts

Data Source

MSC_IOG20_APG40

Source Field

NCALLS

Source Section

SAE

NIND_MSC_SAE

Number of individuals received during successful size alteration

Data Source

MSC_IOG20_APG40

Source Field

NIND

Source Section

SAE

NOVERFLOW_MSC_SAE

Number of seizure attempts with congestion

Data Source

MSC_IOG20_APG40

Source Field

NOVERFLOW

Source Section

SAE

NSCAN_MSC_SAE

Number of accumulations

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

SAE

NTRAL_MSC_SAE

Number of SAE 500 individuals seized at a given instant

Data Source

MSC_IOG20_APG40

Source Field

NTRAL

Source Section

SAE

NTRALACC_MSC_SAE

Accumulated value of NTRAL obtained during NSCAN scans

Data Source

MSC_I0G20_APG40

Source Field

NTRALACC

Source Section

SAE

PERLEN

Period Length

SAE_Block Primitive Calculations

The following is a list of primitive calculations for the SAE_Block entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ServFeature_MSC Primitive Calculations

The following is a list of primitive calculations for the ServFeature_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ServFeature_MSC Peg Counts

The following is a list of peg counts for the ServFeature_MSC entity.

NSERVFEATINV

Number of successful invocations of a service feature

SGSN_MSC Primitive Calculations

The following is a list of primitive calculations for the SGSN_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SGSN_MSC Peg Counts

The following is a list of peg counts for the SGSN_MSC entity.

NPAG1SGSNTOT

Number of first page attempts to an SGSN

NPAG2SGSNTOT

Number of repeated page attempts to an SGSN

NSGSNRESETREC

Number of received Reset messages for each SGSN

NSGSNRESETSENT

Number of sent Reset messages for each SGSN

SPG Primitive Calculations

The following is a list of primitive calculations for the SPG entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SPNode Primitive Calculations

The following is a list of primitive calculations for the SPNode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SPNode Peg Counts

The following is a list of peg counts for the SPNode entity.

ACCFRPM

Free memory storage (kbytes), accumulated

Data Source

BSC_IQG20_APG40

Source Field

ACCFRPM

Source Section

SPSP

ACCLOAD

CPU load (percent), accumulated. The measurements are made from priority level 6 and upwards

Data Source

BSC_IQG20_APG40

Source Field

ACCLOAD

Source Section

SPSP

ACCSPIST

Accumulated time (in minutes) when the SP has been in state ISOLATED

Data Source

BSC_IQG20_APG40

Source Field

ACCSPIST

Source Section

SPSP

BSS_RELEASE

Release

DATALOSTFLAG_SPSP

Lost data flag

Data Source

BSC_IQG20_APG40

Source Field

DATALOSTFLAG

Source Section

SPSP

MAXFRPM

Maximum memory free storage (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

MAXFRPM

Source Section

SPSP

MINFRPM

Minimum free memory storage (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

MINFRPM

Source Section

SPSP

NOLRGUPFMS

Number of ordered large updates of FMS

Data Source

BSC_IQG20_APG40

Source Field

NOLRGUPFMS

Source Section

SPSP

NOSMUPFMS

Number of ordered small updates of FMS

Data Source

BSC_IQG20_APG40

Source Field

NOSMUPFMS

Source Section

SPSP

NPERREL

Number of performed restarts with reload

Data Source

BSC_IQG20_APG40

Source Field

NPERREL

Source Section

SPSP

NPERRES

Number of performed restarts without reload

Data Source

BSC_IOG20_APG40

Source Field

NPERRES

Source Section

SPSP

NRELA_SPSP

Number of ordered restarts with reload, automatically initiated

Data Source

BSC_IOG20_APG40

Source Field

NRELA

Source Section

SPSP

NRELM_SPSP

Number of ordered restarts with reload, manually initiated

Data Source

BSC_IOG20_APG40

Source Field

NRELM

Source Section

SPSP

NRESA

Number of ordered restarts without reload, automatically initiated

Data Source

BSC_IQG20_APG40

Source Field

NRESA

Source Section

SPSP

NRESM

Number of ordered restarts without reload, manually initiated

Data Source

BSC_IQG20_APG40

Source Field

NRESM

Source Section

SPSP

NSCAN

Number of accumulations (scannings)

Data Source

BSC_IQG20_APG40

Source Field

NSCAN

Source Section

SPSP

PERLEN

Period Length

SIZEPM

Total storage allocated (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

SIZEPM

Source Section

SPSP

Subcell Primitive Calculations

The following is a list of primitive calculations for the Subcell entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Subcell Peg Counts

The following is a list of peg counts for the Subcell entity.

AMR_Connection_Filter

AMR Connection Filter

Data Source

AMR Connection Filter

BSPOWER_10Range_10

BTS transmit power level cell data record in the range -10 dB

Data Source

BSPOWER(-10,-10)

BSPOWER_12Range_12

BTS transmit power level cell data record in the range -12 dB

Data Source

BSPOWER(-12,-12)

BSPOWER_14Range_14

BTS transmit power level cell data record in the range -14 dB

Data Source

BSPOWER(-14,-14)

BSPOWER_16Range_16

BTS transmit power level cell data record in the range -16 dB

Data Source

BSPOWER(-16,-16)

BSPOWER_18Range_18

BTS transmit power level cell data record in the range -18 dB

Data Source

BSPOWER(-18,-18)

BSPOWER_20Range_20

BTS transmit power level cell data record in the range -20 dB

Data Source

BSPOWER(-20,-20)

BSPOWER_22Range_22

BTS transmit power level cell data record in the range -22 dB

Data Source

BSPOWER(-22,-22)

BSPOWER_24Range_24

BTS transmit power level cell data record in the range -24 dB

Data Source

BSPOWER(-24,-24)

BSPOWER_26Range_26

BTS transmit power level cell data record in the range -26 dB

Data Source

BSPOWER(-26,-26)

BSPOWER_28Range_28

BTS transmit power level cell data record in the range -28 dB

Data Source

BSPOWER(-28,-28)

BSPOWER_2Range_2

BTS transmit power level cell data record in the range -2 dB

Data Source

BSPOWER(-2,-2)

BSPOWER_30Range_30

BTS transmit power level cell data record in the range -30 dB

Data Source

BSPOWER(-30,-30)

BSPOWER_4Range_4

BTS transmit power level cell data record in the range -4 dB

Data Source

BSPOWER(-4,-4)

BSPOWER_6Range_6

BTS transmit power level cell data record in the range -6 dB

Data Source

BSPOWER(-6,-6)

BSPOWER_8Range_8

BTS transmit power level cell data record in the range -8 dB

Data Source

BSPOWER(-8,-8)

BSPOWER0Range0

BTS transmit power level cell data record in the range 0 dB

Data Source

BSPOWER(0,0)

CellSetName

Name of the cell set that this cell appears in

Data Source

Cell Set Name

MSPOWER0Range0

MS transmit power level cell data record in the range 0 dBm

Data Source

MSPOWER(0,0)

MSPOWER10Range10

MS transmit power level cell data record in the range 10 dBm

Data Source

MSPOWER(10,10)

MSPOWER11Range11

MS transmit power level cell data record in the range 11 dBm

Data Source

MSPOWER(11,11)

MSPOWER12Range12

MS transmit power level cell data record in the range 12 dBm

Data Source

MSPOWER(12,12)

MSPOWER13Range13

MS transmit power level cell data record in the range 13 dBm

Data Source

MSPOWER(13,13)

MSPOWER14Range14

MS transmit power level cell data record in the range 14 dBm

Data Source

MSPOWER(14,14)

MSPOWER15Range15

MS transmit power level cell data record in the range 15 dBm

Data Source

MSPOWER(15,15)

MSPOWER16Range16

MS transmit power level cell data record in the range 16 dBm

Data Source

MSPOWER(16,16)

MSPOWER17Range17

MS transmit power level cell data record in the range 17 dBm

Data Source

MSPOWER(17,17)

MSPOWER18Range18

MS transmit power level cell data record in the range 18 dBm

Data Source

MSPOWER(18,18)

MSPOWER19Range19

MS transmit power level cell data record in the range 19 dBm

Data Source

MSPOWER(19,19)

MSPOWER1Range1

MS transmit power level cell data record in the range 1 dBm

Data Source

MSPOWER(1,1)

MSPOWER20Range20

MS transmit power level cell data record in the range 20 dBm

Data Source

MSPOWER(20,20)

MSPOWER21Range21

MS transmit power level cell data record in the range 21 dBm

Data Source

MSPOWER(21,21)

MSPOWER22Range22

MS transmit power level cell data record in the range 22 dBm

Data Source

MSPOWER(22,22)

MSPOWER23Range23

MS transmit power level cell data record in the range 23 dBm

Data Source

MSPOWER(23,23)

MSPOWER24Range24

MS transmit power level cell data record in the range 24 dBm

Data Source

MSPOWER(24,24)

MSPOWER25Range25

MS transmit power level cell data record in the range 25 dBm

Data Source

MSPOWER(25,25)

MSPOWER26Range26

MS transmit power level cell data record in the range 26 dBm

Data Source

MSPOWER(26,26)

MSPOWER27Range27

MS transmit power level cell data record in the range 27 dBm

Data Source

MSPOWER(27,27)

MSPOWER28Range28

MS transmit power level cell data record in the range 28 dBm

Data Source

MSPOWER(28,28)

MSPOWER29Range29

MS transmit power level cell data record in the range 29 dBm

Data Source

MSPOWER(29,29)

MSPOWER2Range2

MS transmit power level cell data record in the range 2 dBm

Data Source

MSPOWER(2,2)

MSPOWER30Range30

MS transmit power level cell data record in the range 30 dBm

Data Source

MSPOWER(30,30)

MSPOWER31Range31

MS transmit power level cell data record in the range 31 dBm

Data Source

MSPOWER(31,31)

MSPOWER32Range32

MS transmit power level cell data record in the range 32 dBm

Data Source

MSPOWER(32,32)

MSPOWER33Range33

MS transmit power level cell data record in the range 33 dBm

Data Source

MSPOWER(33,33)

MSPOWER34Range34

MS transmit power level cell data record in the range 34 dBm

Data Source

MSPOWER(34,34)

MSPOWER35Range35

MS transmit power level cell data record in the range 35 dBm

Data Source

MSPOWER(35,35)

MSPOWER36Range36

MS transmit power level cell data record in the range 36 dBm

Data Source

MSPOWER(36,36)

MSPOWER37Range37

MS transmit power level cell data record in the range 37 dBm

Data Source

MSPOWER(37,37)

MSPOWER38Range38

MS transmit power level cell data record in the range 38 dBm

Data Source

MSPOWER(38,38)

MSPOWER39Range39

MS transmit power level cell data record in the range 39 dBm

Data Source

MSPOWER(39,39)

MSPOWER3Range3

MS transmit power level cell data record in the range 3 dBm

Data Source

MSPOWER(3,3)

MSPOWER4Range4

MS transmit power level cell data record in the range 4 dBm

Data Source

MSPOWER(4,4)

MSPOWER5Range5

MS transmit power level cell data record in the range 5 dBm

Data Source

MSPOWER(5,5)

MSPOWER6Range6

MS transmit power level cell data record in the range 6 dBm

Data Source

MSPOWER(6,6)

MSPOWER7Range7

MS transmit power level cell data record in the range 7 dBm

Data Source

MSPOWER(7,7)

MSPOWER8Range8

MS transmit power level cell data record in the range 8 dBm

Data Source

MSPOWER(8,8)

MSPOWER9Range9

MS transmit power level cell data record in the range 9 dBm

Data Source

MSPOWER(9,9)

noOfMeasFiltered

Number of filtered measurements

Data Source

noOfMeasFiltered

noOfMeasUnfiltered

Number of unfiltered measurement

Data Source

noOfMeasUnfiltered

PATHLOSSDIFF_10Range_10

Path loss difference between downlink and uplink in the range -10 dB

Data Source

PATHLOSSDIFF(-10,-10)

PATHLOSSDIFF_11Range_11

Path loss difference between downlink and uplink in the range -11 dB

Data Source

PATHLOSSDIFF(-11,-11)

PATHLOSSDIFF_12Range_12

Path loss difference between downlink and uplink in the range -12 dB

Data Source

PATHLOSSDIFF(-12,-12)

PATHLOSSDIFF_13Range_13

Path loss difference between downlink and uplink in the range -13 dB

Data Source

PATHLOSSDIFF(-13,-13)

PATHLOSSDIFF_14Range_14

Path loss difference between downlink and uplink in the range -14 dB

Data Source

PATHLOSSDIFF(-14,-14)

PATHLOSSDIFF_15Range_15

Path loss difference between downlink and uplink in the range -15 dB

Data Source

PATHLOSSDIFF(-15,-15)

PATHLOSSDIFF_16Range_16

Path loss difference between downlink and uplink in the range -16 dB

Data Source

PATHLOSSDIFF(-16,-16)

PATHLOSSDIFF_17Range_17

Path loss difference between downlink and uplink in the range -17 dB

Data Source

PATHLOSSDIFF(-17,-17)

PATHLOSSDIFF_18Range_18

Path loss difference between downlink and uplink in the range -18 dB

Data Source

PATHLOSSDIFF(-18,-18)

PATHLOSSDIFF_19Range_19

Path loss difference between downlink and uplink in the range -19 dB

Data Source

PATHLOSSDIFF(-19,-19)

PATHLOSSDIFF_1Range_1

Path loss difference between downlink and uplink in the range -1 dB

Data Source

PATHLOSSDIFF(-1,-1)

PATHLOSSDIFF_20Range_20

Path loss difference between downlink and uplink in the range -20 dB

Data Source

PATHLOSSDIFF(-20,-20)

PATHLOSSDIFF_21Range_21

Path loss difference between downlink and uplink in the range -21 dB

Data Source

PATHLOSSDIFF(-21,-21)

PATHLOSSDIFF_22Range_22

Path loss difference between downlink and uplink in the range -22 dB

Data Source

PATHLOSSDIFF(-22,-22)

PATHLOSSDIFF_23Range_23

Path loss difference between downlink and uplink in the range -23 dB

Data Source

PATHLOSSDIFF(-23,-23)

PATHLOSSDIFF_24Range_24

Path loss difference between downlink and uplink in the range -24 dB

Data Source

PATHLOSSDIFF(-24,-24)

PATHLOSSDIFF_25Range_25

Path loss difference between downlink and uplink in the range -25 dB

Data Source

PATHLOSSDIFF(-25,-25)

PATHLOSSDIFF_2Range_2

Path loss difference between downlink and uplink in the range -2 dB

Data Source

PATHLOSSDIFF(-2,-2)

PATHLOSSDIFF_3Range_3

Path loss difference between downlink and uplink in the range -3 dB

Data Source

PATHLOSSDIFF(-3,-3)

PATHLOSSDIFF_4Range_4

Path loss difference between downlink and uplink in the range -4 dB

Data Source

PATHLOSSDIFF(-4,-4)

PATHLOSSDIFF_5Range_5

Path loss difference between downlink and uplink in the range -5 dB

Data Source

PATHLOSSDIFF(-5,-5)

PATHLOSSDIFF_6Range_6

Path loss difference between downlink and uplink in the range -6 dB

Data Source

PATHLOSSDIFF(-6,-6)

PATHLOSSDIFF_7Range_7

Path loss difference between downlink and uplink in the range -7 dB

Data Source

PATHLOSSDIFF(-7,-7)

PATHLOSSDIFF_8Range_8

Path loss difference between downlink and uplink in the range -8 dB

Data Source

PATHLOSSDIFF(-8,-8)

PATHLOSSDIFF_9Range_9

Path loss difference between downlink and uplink in the range -9 dB

Data Source

PATHLOSSDIFF(-9,-9)

PATHLOSSDIFF0Range0

Path loss difference between downlink and uplink in the range 0 dB

Data Source

PATHLOSSDIFF(0,0)

PATHLOSSDIFF10Range10

Path loss difference between downlink and uplink in the range 10 dB

Data Source

PATHLOSSDIFF(10,10)

PATHLOSSDIFF11Range11

Path loss difference between downlink and uplink in the range 11 dB

Data Source

PATHLOSSDIFF(11,11)

PATHLOSSDIFF12Range12

Path loss difference between downlink and uplink in the range 12 dB

Data Source

PATHLOSSDIFF(12,12)

PATHLOSSDIFF13Range13

Path loss difference between downlink and uplink in the range 13 dB

Data Source

PATHLOSSDIFF(13,13)

PATHLOSSDIFF14Range14

Path loss difference between downlink and uplink in the range 14 dB

Data Source

PATHLOSSDIFF(14,14)

PATHLOSSDIFF15Range15

Path loss difference between downlink and uplink in the range 15 dB

Data Source

PATHLOSSDIFF(15,15)

PATHLOSSDIFF16Range16

Path loss difference between downlink and uplink in the range 16 dB

Data Source

PATHLOSSDIFF(16,16)

PATHLOSSDIFF17Range17

Path loss difference between downlink and uplink in the range 17 dB

Data Source

PATHLOSSDIFF(17,17)

PATHLOSSDIFF18Range18

Path loss difference between downlink and uplink in the range 18 dB

Data Source

PATHLOSSDIFF(18,18)

PATHLOSSDIFF19Range19

Path loss difference between downlink and uplink in the range 19 dB

Data Source

PATHLOSSDIFF(19,19)

PATHLOSSDIFF1Range1

Path loss difference between downlink and uplink in the range 1 dB

Data Source

PATHLOSSDIFF(1,1)

PATHLOSSDIFF20Range20

Path loss difference between downlink and uplink in the range 20 dB

Data Source

PATHLOSSDIFF(20,20)

PATHLOSSDIFF21Range21

Path loss difference between downlink and uplink in the range 21 dB

Data Source

PATHLOSSDIFF(21,21)

PATHLOSSDIFF22Range22

Path loss difference between downlink and uplink in the range 22 dB

Data Source

PATHLOSSDIFF(22,22)

PATHLOSSDIFF23Range23

Path loss difference between downlink and uplink in the range 23 dB

Data Source

PATHLOSSDIFF(23,23)

PATHLOSSDIFF24Range24

Path loss difference between downlink and uplink in the range 24 dB

Data Source

PATHLOSSDIFF(24,24)

PATHLOSSDIFF25Range25

Path loss difference between downlink and uplink in the range 25 dB

Data Source

PATHLOSSDIFF(25,25)

PATHLOSSDIFF2Range2

Path loss difference between downlink and uplink in the range 2 dB

Data Source

PATHLOSSDIFF(2,2)

PATHLOSSDIFF3Range3

Path loss difference between downlink and uplink in the range 3 dB

Data Source

PATHLOSSDIFF(3,3)

PATHLOSSDIFF4Range4

Path loss difference between downlink and uplink in the range 4 dB

Data Source

PATHLOSSDIFF(4,4)

PATHLOSSDIFF5Range5

Path loss difference between downlink and uplink in the range 5 dB

Data Source

PATHLOSSDIFF(5,5)

PATHLOSSDIFF6Range6

Path loss difference between downlink and uplink in the range 6 dB

Data Source

PATHLOSSDIFF(6,6)

PATHLOSSDIFF7Range7

Path loss difference between downlink and uplink in the range 7 dB

Data Source

PATHLOSSDIFF(7,7)

PATHLOSSDIFF8Range8

Path loss difference between downlink and uplink in the range 8 dB

Data Source

PATHLOSSDIFF(8,8)

PATHLOSSDIFF9Range9

Path loss difference between downlink and uplink in the range 9 dB

Data Source

PATHLOSSDIFF(9,9)

PATHLOSSDL100Range101

Downlink Path Loss Cell Data in the range 100 to 101 dB

Data Source

PATHLOSSDL(100,101)

PATHLOSSDL102Range103

Downlink Path Loss Cell Data in the range 102 to 103 dB

Data Source

PATHLOSSDL(102,103)

PATHLOSSDL104Range105

Downlink Path Loss Cell Data in the range 104 to 105 dB

Data Source

PATHLOSSDL(104,105)

PATHLOSSDL106Range107

Downlink Path Loss Cell Data in the range 106 to 107 dB

Data Source

PATHLOSSDL(106,107)

PATHLOSSDL108Range109

Downlink Path Loss Cell Data in the range 108 to 109 dB

Data Source

PATHLOSSDL(108,109)

PATHLOSSDL110Range111

Downlink Path Loss Cell Data in the range 110 to 111 dB

Data Source

PATHLOSSDL(110,111)

PATHLOSSDL112Range113

Downlink Path Loss Cell Data in the range 112 to 113 dB

Data Source

PATHLOSSDL(112,113)

PATHLOSSDL114Range115

Downlink Path Loss Cell Data in the range 114 to 115 dB

Data Source

PATHLOSSDL(114,115)

PATHLOSSDL116Range117

Downlink Path Loss Cell Data in the range 116 to 117 dB

Data Source

PATHLOSSDL(116,117)

PATHLOSSDL118Range119

Downlink Path Loss Cell Data in the range 118 to 119 dB

Data Source

PATHLOSSDL(118,119)

PATHLOSSDL120Range121

Downlink Path Loss Cell Data in the range 120 to 121 dB

Data Source

PATHLOSSDL(120,121)

PATHLOSSDL122Range123

Downlink Path Loss Cell Data in the range 122 to 123 dB

Data Source

PATHLOSSDL(122,123)

PATHLOSSDL124Range125

Downlink Path Loss Cell Data in the range 124 to 125 dB

Data Source

PATHLOSSDL(124,125)

PATHLOSSDL126Range127

Downlink Path Loss Cell Data in the range 126 to 127 dB

Data Source

PATHLOSSDL(126,127)

PATHLOSSDL128Range129

Downlink Path Loss Cell Data in the range 128 to 129 dB

Data Source

PATHLOSSDL(128,129)

PATHLOSSDL130Range131

Downlink Path Loss Cell Data in the range 130 to 131 dB

Data Source

PATHLOSSDL(130,131)

PATHLOSSDL132Range133

Downlink Path Loss Cell Data in the range 132 to 133 dB

Data Source

PATHLOSSDL(132,133)

PATHLOSSDL134Range135

Downlink Path Loss Cell Data in the range 134 to 135 dB

Data Source

PATHLOSSDL(134,135)

PATHLOSSDL136Range137

Downlink Path Loss Cell Data in the range 136 to 137 dB

Data Source

PATHLOSSDL(136,137)

PATHLOSSDL138Range139

Downlink Path Loss Cell Data in the range 138 to 139 dB

Data Source

PATHLOSSDL(138,139)

PATHLOSSDL140Range141

Downlink Path Loss Cell Data in the range 140 to 141 dB

Data Source

PATHLOSSDL(140,141)

PATHLOSSDL142Range143

Downlink Path Loss Cell Data in the range 142 to 143 dB

Data Source

PATHLOSSDL(142,143)

PATHLOSSDL144Range145

Downlink Path Loss Cell Data in the range 144 to 145 dB

Data Source

PATHLOSSDL(144,145)

PATHLOSSDL146Range147

Downlink Path Loss Cell Data in the range 146 to 147 dB

Data Source

PATHLOSSDL(146,147)

PATHLOSSDL148Range149

Downlink Path Loss Cell Data in the range 148 to 149 dB

Data Source

PATHLOSSDL(148,149)

PATHLOSSDL150Range151

Downlink Path Loss Cell Data in the range 150 to 151 dB

Data Source

PATHLOSSDL(150,151)

PATHLOSSDL152Range153

Downlink Path Loss Cell Data in the range 152 to 153 dB

Data Source

PATHLOSSDL(152,153)

PATHLOSSDL154Range155

Downlink Path Loss Cell Data in the range 154 to 155 dB

Data Source

PATHLOSSDL(154,155)

PATHLOSSDL156Range157

Downlink Path Loss Cell Data in the range 156 to 157 dB

Data Source

PATHLOSSDL(156,157)

PATHLOSSDL158Range190

Downlink Path Loss Cell Data in the range 158 to 190 dB

Data Source

PATHLOSSDL(158,190)

PATHLOSSDL30Range31

Downlink Path Loss Cell Data in the range 30 to 31 dB

Data Source

PATHLOSSDL(30,31)

PATHLOSSDL32Range33

Downlink Path Loss Cell Data in the range 32 to 33 dB

Data Source

PATHLOSSDL(32,33)

PATHLOSSDL34Range35

Downlink Path Loss Cell Data in the range 34 to 35 dB

Data Source

PATHLOSSDL(34,35)

PATHLOSSDL36Range37

Downlink Path Loss Cell Data in the range 36 to 37 dB

Data Source

PATHLOSSDL(36,37)

PATHLOSSDL38Range39

Downlink Path Loss Cell Data in the range 38 to 39 dB

Data Source

PATHLOSSDL(38,39)

PATHLOSSDL40Range41

Downlink Path Loss Cell Data in the range 40 to 41 dB

Data Source

PATHLOSSDL(40,41)

PATHLOSSDL42Range43

Downlink Path Loss Cell Data in the range 42 to 43 dB

Data Source

PATHLOSSDL(42,43)

PATHLOSSDL44Range45

Downlink Path Loss Cell Data in the range 44 to 45 dB

Data Source

PATHLOSSDL(44,45)

PATHLOSSDL46Range47

Downlink Path Loss Cell Data in the range 46 to 47 dB

Data Source

PATHLOSSDL(46,47)

PATHLOSSDL48Range49

Downlink Path Loss Cell Data in the range 48 to 49 dB

Data Source

PATHLOSSDL(48,49)

PATHLOSSDL50Range51

Downlink Path Loss Cell Data in the range 50 to 51 dB

Data Source

PATHLOSSDL(50,51)

PATHLOSSDL52Range53

Downlink Path Loss Cell Data in the range 52 to 53 dB

Data Source

PATHLOSSDL(52,53)

PATHLOSSDL54Range55

Downlink Path Loss Cell Data in the range 54 to 55 dB

Data Source

PATHLOSSDL(54,55)

PATHLOSSDL56Range57

Downlink Path Loss Cell Data in the range 56 to 57 dB

Data Source

PATHLOSSDL(56,57)

PATHLOSSDL58Range59

Downlink Path Loss Cell Data in the range 58 to 59 dB

Data Source

PATHLOSSDL(58,59)

PATHLOSSDL60Range61

Downlink Path Loss Cell Data in the range 60 to 61 dB

Data Source

PATHLOSSDL(60,61)

PATHLOSSDL62Range63

Downlink Path Loss Cell Data in the range 62 to 63 dB

Data Source

PATHLOSSDL(62,63)

PATHLOSSDL64Range65

Downlink Path Loss Cell Data in the range 64 to 65 dB

Data Source

PATHLOSSDL(64,65)

PATHLOSSDL66Range67

Downlink Path Loss Cell Data in the range 66 to 67 dB

Data Source

PATHLOSSDL(66,67)

PATHLOSSDL68Range69

Downlink Path Loss Cell Data in the range 68 to 69 dB

Data Source

PATHLOSSDL(68,69)

PATHLOSSDL70Range71

Downlink Path Loss Cell Data in the range 70 to 71 dB

Data Source

PATHLOSSDL(70,71)

PATHLOSSDL72Range73

Downlink Path Loss Cell Data in the range 72 to 73 dB

Data Source

PATHLOSSDL(72,73)

PATHLOSSDL74Range75

Downlink Path Loss Cell Data in the range 74 to 75 dB

Data Source

PATHLOSSDL(74,75)

PATHLOSSDL76Range77

Downlink Path Loss Cell Data in the range 76 to 77 dB

Data Source

PATHLOSSDL(76,77)

PATHLOSSDL78Range79

Downlink Path Loss Cell Data in the range 78 to 79 dB

Data Source

PATHLOSSDL(78,79)

PATHLOSSDL80Range81

Downlink Path Loss Cell Data in the range 80 to 81 dB

Data Source

PATHLOSSDL(80,81)

PATHLOSSDL82Range83

Downlink Path Loss Cell Data in the range 82 to 83 dB

Data Source

PATHLOSSDL(82,83)

PATHLOSSDL84Range85

Downlink Path Loss Cell Data in the range 84 to 85 dB

Data Source

PATHLOSSDL(84,85)

PATHLOSSDL86Range87

Downlink Path Loss Cell Data in the range 86 to 87 dB

Data Source

PATHLOSSDL(86,87)

PATHLOSSDL88Range89

Downlink Path Loss Cell Data in the range 88 to 89 dB

Data Source

PATHLOSSDL(88,89)

PATHLOSSDL90Range91

Downlink Path Loss Cell Data in the range 90 to 91 dB

Data Source

PATHLOSSDL(90,91)

PATHLOSSDL92Range93

Downlink Path Loss Cell Data in the range 92 to 93 dB

Data Source

PATHLOSSDL(92,93)

PATHLOSSDL94Range95

Downlink Path Loss Cell Data in the range 94 to 95 dB

Data Source

PATHLOSSDL(94,95)

PATHLOSSDL96Range97

Downlink Path Loss Cell Data in the range 96 to 97 dB

Data Source

PATHLOSSDL(96,97)

PATHLOSSDL98Range99

Downlink Path Loss Cell Data in the range 98 to 99 dB

Data Source

PATHLOSSDL(98,99)

PATHLOSSUL100Range101

Uplink Path Loss Cell Data in the range 100 to 101 dB

Data Source

PATHLOSSUL(100,101)

PATHLOSSUL102Range103

Uplink Path Loss Cell Data in the range 102 to 103 dB

Data Source

PATHLOSSUL(102,103)

PATHLOSSUL104Range105

Uplink Path Loss Cell Data in the range 104 to 105 dB

Data Source

PATHLOSSUL(104,105)

PATHLOSSUL106Range107

Uplink Path Loss Cell Data in the range 106 to 107 dB

Data Source

PATHLOSSUL(106,107)

PATHLOSSUL108Range109

Uplink Path Loss Cell Data in the range 108 to 109 dB

Data Source

PATHLOSSUL(108,109)

PATHLOSSUL110Range111

Uplink Path Loss Cell Data in the range 110 to 111 dB

Data Source

PATHLOSSUL(110,111)

PATHLOSSUL112Range113

Uplink Path Loss Cell Data in the range 112 to 113 dB

Data Source

PATHLOSSUL(112,113)

PATHLOSSUL114Range115

Uplink Path Loss Cell Data in the range 114 to 115 dB

Data Source

PATHLOSSUL(114,115)

PATHLOSSUL116Range117

Uplink Path Loss Cell Data in the range 116 to 117 dB

Data Source

PATHLOSSUL(116,117)

PATHLOSSUL118Range119

Uplink Path Loss Cell Data in the range 118 to 119 dB

Data Source

PATHLOSSUL(118,119)

PATHLOSSUL120Range121

Uplink Path Loss Cell Data in the range 120 to 121 dB

Data Source

PATHLOSSUL(120,121)

PATHLOSSUL122Range123

Uplink Path Loss Cell Data in the range 122 to 123 dB

Data Source

PATHLOSSUL(122,123)

PATHLOSSUL124Range125

Uplink Path Loss Cell Data in the range 124 to 125 dB

Data Source

PATHLOSSUL(124,125)

PATHLOSSUL126Range127

Uplink Path Loss Cell Data in the range 126 to 127 dB

Data Source

PATHLOSSUL(126,127)

PATHLOSSUL128Range129

Uplink Path Loss Cell Data in the range 128 to 129 dB

Data Source

PATHLOSSUL(128,129)

PATHLOSSUL130Range131

Uplink Path Loss Cell Data in the range 130 to 131 dB

Data Source

PATHLOSSUL(130,131)

PATHLOSSUL132Range133

Uplink Path Loss Cell Data in the range 132 to 133 dB

Data Source

PATHLOSSUL(132,133)

PATHLOSSUL134Range135

Uplink Path Loss Cell Data in the range 134 to 135 dB

Data Source

PATHLOSSUL(134,135)

PATHLOSSUL136Range137

Uplink Path Loss Cell Data in the range 136 to 137 dB

Data Source

PATHLOSSUL(136,137)

PATHLOSSUL138Range139

Uplink Path Loss Cell Data in the range 138 to 139 dB

Data Source

PATHLOSSUL(138,139)

PATHLOSSUL140Range141

Uplink Path Loss Cell Data in the range 140 to 141 dB

Data Source

PATHLOSSUL(140,141)

PATHLOSSUL142Range143

Uplink Path Loss Cell Data in the range 142 to 143 dB

Data Source

PATHLOSSUL(142,143)

PATHLOSSUL144Range145

Uplink Path Loss Cell Data in the range 144 to 145 dB

Data Source

PATHLOSSUL(144,145)

PATHLOSSUL146Range147

Uplink Path Loss Cell Data in the range 146 to 147 dB

Data Source

PATHLOSSUL(146,147)

PATHLOSSUL148Range153

Uplink Path Loss Cell Data in the range 148 to 153 dB

Data Source

PATHLOSSUL(148,153)

PATHLOSSUL30Range31

Uplink Path Loss Cell Data in the range 30 to 31 dB

Data Source

PATHLOSSUL(30,31)

PATHLOSSUL32Range33

Uplink Path Loss Cell Data in the range 32 to 33 dB

Data Source

PATHLOSSUL(32,33)

PATHLOSSUL34Range35

Uplink Path Loss Cell Data in the range 34 to 35 dB

Data Source

PATHLOSSUL(34,35)

PATHLOSSUL36Range37

Uplink Path Loss Cell Data in the range 36 to 37 dB

Data Source

PATHLOSSUL(36,37)

PATHLOSSUL38Range39

Uplink Path Loss Cell Data in the range 38 to 39 dB

Data Source

PATHLOSSUL(38,39)

PATHLOSSUL40Range41

Uplink Path Loss Cell Data in the range 40 to 41 dB

Data Source

PATHLOSSUL(40,41)

PATHLOSSUL42Range43

Uplink Path Loss Cell Data in the range 42 to 43 dB

Data Source

PATHLOSSUL(42,43)

PATHLOSSUL44Range45

Uplink Path Loss Cell Data in the range 44 to 45 dB

Data Source

PATHLOSSUL(44,45)

PATHLOSSUL46Range47

Uplink Path Loss Cell Data in the range 46 to 47 dB

Data Source

PATHLOSSUL(46,47)

PATHLOSSUL48Range49

Uplink Path Loss Cell Data in the range 48 to 49 dB

Data Source

PATHLOSSUL(48,49)

PATHLOSSUL50Range51

Uplink Path Loss Cell Data in the range 50 to 51 dB

Data Source

PATHLOSSUL(50,51)

PATHLOSSUL52Range53

Uplink Path Loss Cell Data in the range 52 to 53 dB

Data Source

PATHLOSSUL(52,53)

PATHLOSSUL54Range55

Uplink Path Loss Cell Data in the range 54 to 55 dB

Data Source

PATHLOSSUL(54,55)

PATHLOSSUL56Range57

Uplink Path Loss Cell Data in the range 56 to 57 dB

Data Source

PATHLOSSUL(56,57)

PATHLOSSUL58Range59

Uplink Path Loss Cell Data in the range 58 to 59 dB

Data Source

PATHLOSSUL(58,59)

PATHLOSSUL60Range61

Uplink Path Loss Cell Data in the range 60 to 61 dB

Data Source

PATHLOSSUL(60,61)

PATHLOSSUL62Range63

Uplink Path Loss Cell Data in the range 62 to 63 dB

Data Source

PATHLOSSUL(62,63)

PATHLOSSUL64Range65

Uplink Path Loss Cell Data in the range 64 to 65 dB

Data Source

PATHLOSSUL(64,65)

PATHLOSSUL66Range67

Uplink Path Loss Cell Data in the range 66 to 67 dB

Data Source

PATHLOSSUL(66,67)

PATHLOSSUL68Range69

Uplink Path Loss Cell Data in the range 68 to 69 dB

Data Source

PATHLOSSUL(68,69)

PATHLOSSUL70Range71

Uplink Path Loss Cell Data in the range 70 to 71 dB

Data Source

PATHLOSSUL(70,71)

PATHLOSSUL72Range73

Uplink Path Loss Cell Data in the range 72 to 73 dB

Data Source

PATHLOSSUL(72,73)

PATHLOSSUL74Range75

Uplink Path Loss Cell Data in the range 74 to 75 dB

Data Source

PATHLOSSUL(74,75)

PATHLOSSUL76Range77

Uplink Path Loss Cell Data in the range 76 to 77 dB

Data Source

PATHLOSSUL(76,77)

PATHLOSSUL78Range79

Uplink Path Loss Cell Data in the range 78 to 79 dB

Data Source

PATHLOSSUL(78,79)

PATHLOSSUL80Range81

Uplink Path Loss Cell Data in the range 80 to 81 dB

Data Source

PATHLOSSUL(80,81)

PATHLOSSUL82Range83

Uplink Path Loss Cell Data in the range 82 to 83 dB

Data Source

PATHLOSSUL(82,83)

PATHLOSSUL84Range85

Uplink Path Loss Cell Data in the range 84 to 85 dB

Data Source

PATHLOSSUL(84,85)

PATHLOSSUL86Range87

Uplink Path Loss Cell Data in the range 86 to 87 dB

Data Source

PATHLOSSUL(86,87)

PATHLOSSUL88Range89

Uplink Path Loss Cell Data in the range 88 to 89 dB

Data Source

PATHLOSSUL(88,89)

PATHLOSSUL90Range91

Uplink Path Loss Cell Data in the range 90 to 91 dB

Data Source

PATHLOSSUL(90,91)

PATHLOSSUL92Range93

Uplink Path Loss Cell Data in the range 92 to 93 dB

Data Source

PATHLOSSUL(92,93)

PATHLOSSUL94Range95

Uplink Path Loss Cell Data in the range 94 to 95 dB

Data Source

PATHLOSSUL(94,95)

PATHLOSSUL96Range97

Uplink Path Loss Cell Data in the range 96 to 97 dB

Data Source

PATHLOSSUL(96,97)

PATHLOSSUL98Range99

Uplink Path Loss Cell Data in the range 98 to 99 dB

Data Source

PATHLOSSUL(98,99)

PERLENSEC

Period Length

Data Source

I5VALASLR

RXLEVDL0Range0

Received signal strength downlink in the range -110 dBm

Data Source

RXLEVDL(0,0)

RXLEVDL10Range10

Received signal strength downlink in the range -100 dBm

Data Source

RXLEVDL(10,10)

RXLEVDL11Range11

Received signal strength downlink in the range -99 dBm

Data Source

RXLEVDL(11,11)

RXLEVDL12Range12

Received signal strength downlink in the range -98 dBm

Data Source

RXLEVDL(12,12)

RXLEVDL13Range13

Received signal strength downlink in the range -97 dBm

Data Source

RXLEVDL(13,13)

RXLEVDL14Range14

Received signal strength downlink in the range -96 dBm

Data Source

RXLEVDL(14,14)

RXLEVDL15Range15

Received signal strength downlink in the range -95 dBm

Data Source

RXLEVDL(15,15)

RXLEVDL16Range16

Received signal strength downlink in the range -94 dBm

Data Source

RXLEVDL(16,16)

RXLEVDL17Range17

Received signal strength downlink in the range -93 dBm

Data Source

RXLEVDL(17,17)

RXLEVDL18Range18

Received signal strength downlink in the range -92 dBm

Data Source

RXLEVDL(18,18)

RXLEVDL19Range19

Received signal strength downlink in the range -91 dBm

Data Source

RXLEVDL(19,19)

RXLEVDL1Range1

Received signal strength downlink in the range -109 dBm

Data Source

RXLEVDL(1,1)

RXLEVDL20Range20

Received signal strength downlink in the range -90 dBm

Data Source

RXLEVDL(20,20)

RXLEVDL21Range21

Received signal strength downlink in the range -89 dBm

Data Source

RXLEVDL(21,21)

RXLEVDL22Range22

Received signal strength downlink in the range -88 dBm

Data Source

RXLEVDL(22,22)

RXLEVDL23Range23

Received signal strength downlink in the range -87 dBm

Data Source

RXLEVDL(23,23)

RXLEVDL24Range24

Received signal strength downlink in the range -86 dBm

Data Source

RXLEVDL(24,24)

RXLEVDL25Range25

Received signal strength downlink in the range -85 dBm

Data Source

RXLEVDL(25,25)

RXLEVDL26Range26

Received signal strength downlink in the range -84 dBm

Data Source

RXLEVDL(26,26)

RXLEVDL27Range27

Received signal strength downlink in the range -83 dBm

Data Source

RXLEVDL(27,27)

RXLEVDL28Range28

Received signal strength downlink in the range -82 dBm

Data Source

RXLEVDL(28,28)

RXLEVDL29Range29

Received signal strength downlink in the range -81 dBm

Data Source

RXLEVDL(29,29)

RXLEVDL2Range2

Received signal strength downlink in the range -108 dBm

Data Source

RXLEVDL(2,2)

RXLEVDL30Range30

Received signal strength downlink in the range -80 dBm

Data Source

RXLEVDL(30,30)

RXLEVDL31Range31

Received signal strength downlink in the range -79 dBm

Data Source

RXLEVDL(31,31)

RXLEVDL32Range32

Received signal strength downlink in the range -78 dBm

Data Source

RXLEVDL(32,32)

RXLEVDL33Range33

Received signal strength downlink in the range -77 dBm

Data Source

RXLEVDL(33,33)

RXLEVDL34Range34

Received signal strength downlink in the range -76 dBm

Data Source

RXLEVDL(34,34)

RXLEVDL35Range35

Received signal strength downlink in the range -75 dBm

Data Source

RXLEVDL(35,35)

RXLEVDL36Range36

Received signal strength downlink in the range -74 dBm

Data Source

RXLEVDL(36,36)

RXLEVDL37Range37

Received signal strength downlink in the range -73 dBm

Data Source

RXLEVDL(37,37)

RXLEVDL38Range38

Received signal strength downlink in the range -72 dBm

Data Source

RXLEVDL(38,38)

RXLEVDL39Range39

Received signal strength downlink in the range -71 dBm

Data Source

RXLEVDL(39,39)

RXLEVDL3Range3

Received signal strength downlink in the range -107 dBm

Data Source

RXLEVDL(3,3)

RXLEVDL40Range40

Received signal strength downlink in the range -70 dBm

Data Source

RXLEVDL(40,40)

RXLEVDL41Range41

Received signal strength downlink in the range -69 dBm

Data Source

RXLEVDL(41,41)

RXLEVDL42Range42

Received signal strength downlink in the range -68 dBm

Data Source

RXLEVDL(42,42)

RXLEVDL43Range43

Received signal strength downlink in the range -67 dBm

Data Source

RXLEVDL(43,43)

RXLEVDL44Range44

Received signal strength downlink in the range -66 dBm

Data Source

RXLEVDL(44,44)

RXLEVDL45Range45

Received signal strength downlink in the range -65 dBm

Data Source

RXLEVDL(45,45)

RXLEVDL46Range46

Received signal strength downlink in the range -64 dBm

Data Source

RXLEVDL(46,46)

RXLEVDL47Range47

Received signal strength downlink in the range -63 dBm

Data Source

RXLEVDL(47,47)

RXLEVDL48Range48

Received signal strength downlink in the range -62 dBm

Data Source

RXLEVDL(48,48)

RXLEVDL49Range49

Received signal strength downlink in the range -61 dBm

Data Source

RXLEVDL(49,49)

RXLEVDL4Range4

Received signal strength downlink in the range -106 dBm

Data Source

RXLEVDL(4,4)

RXLEVDL50Range50

Received signal strength downlink in the range -60 dBm

Data Source

RXLEVDL(50,50)

RXLEVDL51Range51

Received signal strength downlink in the range -59 dBm

Data Source

RXLEVDL(51,51)

RXLEVDL52Range52

Received signal strength downlink in the range -58 dBm

Data Source

RXLEVDL(52,52)

RXLEVDL53Range53

Received signal strength downlink in the range -57 dBm

Data Source

RXLEVDL(53,53)

RXLEVDL54Range54

Received signal strength downlink in the range -56 dBm

Data Source

RXLEVDL(54,54)

RXLEVDL55Range55

Received signal strength downlink in the range -55 dBm

Data Source

RXLEVDL(55,55)

RXLEVDL56Range56

Received signal strength downlink in the range -54 dBm

Data Source

RXLEVDL(56,56)

RXLEVDL57Range57

Received signal strength downlink in the range -53 dBm

Data Source

RXLEVDL(57,57)

RXLEVDL58Range58

Received signal strength downlink in the range -52 dBm

Data Source

RXLEVDL(58,58)

RXLEVDL59Range59

Received signal strength downlink in the range -51 dBm

Data Source

RXLEVDL(59,59)

RXLEVDL5Range5

Received signal strength downlink in the range -105 dBm

Data Source

RXLEVDL(5,5)

RXLEVDL60Range60

Received signal strength downlink in the range -50 dBm

Data Source

RXLEVDL(60,60)

RXLEVDL61Range61

Received signal strength downlink in the range -49 dBm

Data Source

RXLEVDL(61,61)

RXLEVDL62Range62

Received signal strength downlink in the range -48 dBm

Data Source

RXLEVDL(62,62)

RXLEVDL63Range63

Received signal strength downlink in the range -47 dBm

Data Source

RXLEVDL(63,63)

RXLEVDL6Range6

Received signal strength downlink in the range -104 dBm

Data Source

RXLEVDL(6,6)

RXLEVDL7Range7

Received signal strength downlink in the range -103 dBm

Data Source

RXLEVDL(7,7)

RXLEVDL8Range8

Received signal strength downlink in the range -102 dBm

Data Source

RXLEVDL(8,8)

RXLEVDL9Range9

Received signal strength downlink in the range -101 dBm

Data Source

RXLEVDL(9,9)

RXLEVUL0Range0

Received signal strength uplink in the range -110 dBm

Data Source

RXLEVUL(0,0)

RXLEVUL10Range10

Received signal strength uplink in the range -100 dBm

Data Source

RXLEVUL(10,10)

RXLEVUL11Range11

Received signal strength uplink in the range -99 dBm

Data Source

RXLEVUL(11,11)

RXLEVUL12Range12

Received signal strength uplink in the range -98 dBm

Data Source

RXLEVUL(12,12)

RXLEVUL13Range13

Received signal strength uplink in the range -97 dBm

Data Source

RXLEVUL(13,13)

RXLEVUL14Range14

Received signal strength uplink in the range -96 dBm

Data Source

RXLEVUL(14,14)

RXLEVUL15Range15

Received signal strength uplink in the range -95 dBm

Data Source

RXLEVUL(15,15)

RXLEVUL16Range16

Received signal strength uplink in the range -94 dBm

Data Source

RXLEVUL(16,16)

RXLEVUL17Range17

Received signal strength uplink in the range -93 dBm

Data Source

RXLEVUL(17,17)

RXLEVUL18Range18

Received signal strength uplink in the range -92 dBm

Data Source

RXLEVUL(18,18)

RXLEVUL19Range19

Received signal strength uplink in the range -91 dBm

Data Source

RXLEVUL(19,19)

RXLEVUL1Range1

Received signal strength uplink in the range -109 dBm

Data Source

RXLEVUL(1,1)

RXLEVUL20Range20

Received signal strength uplink in the range -90 dBm

Data Source

RXLEVUL(20,20)

RXLEVUL21Range21

Received signal strength uplink in the range -89 dBm

Data Source

RXLEVUL(21,21)

RXLEVUL22Range22

Received signal strength uplink in the range -88 dBm

Data Source

RXLEVUL(22,22)

RXLEVUL23Range23

Received signal strength uplink in the range -87 dBm

Data Source

RXLEVUL(23,23)

RXLEVUL24Range24

Received signal strength uplink in the range -86 dBm

Data Source

RXLEVUL(24,24)

RXLEVUL25Range25

Received signal strength uplink in the range -85 dBm

Data Source

RXLEVUL(25,25)

RXLEVUL26Range26

Received signal strength uplink in the range -84 dBm

Data Source

RXLEVUL(26,26)

RXLEVUL27Range27

Received signal strength uplink in the range -83 dBm

Data Source

RXLEVUL(27,27)

RXLEVUL28Range28

Received signal strength uplink in the range -82 dBm

Data Source

RXLEVUL(28,28)

RXLEVUL29Range29

Received signal strength uplink in the range -81 dBm

Data Source

RXLEVUL(29,29)

RXLEVUL2Range2

Received signal strength uplink in the range -108 dBm

Data Source

RXLEVUL(2,2)

RXLEVUL30Range30

Received signal strength uplink in the range -80 dBm

Data Source

RXLEVUL(30,30)

RXLEVUL31Range31

Received signal strength uplink in the range -79 dBm

Data Source

RXLEVUL(31,31)

RXLEVUL32Range32

Received signal strength uplink in the range -78 dBm

Data Source

RXLEVUL(32,32)

RXLEVUL33Range33

Received signal strength uplink in the range -77 dBm

Data Source

RXLEVUL(33,33)

RXLEVUL34Range34

Received signal strength uplink in the range -76 dBm

Data Source

RXLEVUL(34,34)

RXLEVUL35Range35

Received signal strength uplink in the range -75 dBm

Data Source

RXLEVUL(35,35)

RXLEVUL36Range36

Received signal strength uplink in the range -74 dBm

Data Source

RXLEVUL(36,36)

RXLEVUL37Range37

Received signal strength uplink in the range -73 dBm

Data Source

RXLEVUL(37,37)

RXLEVUL38Range38

Received signal strength uplink in the range -72 dBm

Data Source

RXLEVUL(38,38)

RXLEVUL39Range39

Received signal strength uplink in the range -71 dBm

Data Source

RXLEVUL(39,39)

RXLEVUL3Range3

Received signal strength uplink in the range -107 dBm

Data Source

RXLEVUL(3,3)

RXLEVUL40Range40

Received signal strength uplink in the range -70 dBm

Data Source

RXLEVUL(40,40)

RXLEVUL41Range41

Received signal strength uplink in the range -69 dBm

Data Source

RXLEVUL(41,41)

RXLEVUL42Range42

Received signal strength uplink in the range -68 dBm

Data Source

RXLEVUL(42,42)

RXLEVUL43Range43

Received signal strength uplink in the range -67 dBm

Data Source

RXLEVUL(43,43)

RXLEVUL44Range44

Received signal strength uplink in the range -66 dBm

Data Source

RXLEVUL(44,44)

RXLEVUL45Range45

Received signal strength uplink in the range -65 dBm

Data Source

RXLEVUL(45,45)

RXLEVUL46Range46

Received signal strength uplink in the range -64 dBm

Data Source

RXLEVUL(46,46)

RXLEVUL47Range47

Received signal strength uplink in the range -63 dBm

Data Source

RXLEVUL(47,47)

RXLEVUL48Range48

Received signal strength uplink in the range -62 dBm

Data Source

RXLEVUL(48,48)

RXLEVUL49Range49

Received signal strength uplink in the range -61 dBm

Data Source

RXLEVUL(49,49)

RXLEVUL4Range4

Received signal strength uplink in the range -106 dBm

Data Source

RXLEVUL(4,4)

RXLEVUL50Range50

Received signal strength uplink in the range -60 dBm

Data Source

RXLEVUL(50,50)

RXLEVUL51Range51

Received signal strength uplink in the range -59 dBm

Data Source

RXLEVUL(51,51)

RXLEVUL52Range52

Received signal strength uplink in the range -58 dBm

Data Source

RXLEVUL(52,52)

RXLEVUL53Range53

Received signal strength uplink in the range -57 dBm

Data Source

RXLEVUL(53,53)

RXLEVUL54Range54

Received signal strength uplink in the range -56 dBm

Data Source

RXLEVUL(54,54)

RXLEVUL55Range55

Received signal strength uplink in the range -55 dBm

Data Source

RXLEVUL(55,55)

RXLEVUL56Range56

Received signal strength uplink in the range -54 dBm

Data Source

RXLEVUL(56,56)

RXLEVUL57Range57

Received signal strength uplink in the range -53 dBm

Data Source

RXLEVUL(57,57)

RXLEVUL58Range58

Received signal strength uplink in the range -52 dBm

Data Source

RXLEVUL(58,58)

RXLEVUL59Range59

Received signal strength uplink in the range -51 dBm

Data Source

RXLEVUL(59,59)

RXLEVUL5Range5

Received signal strength uplink in the range -105 dBm

Data Source

RXLEVUL(5,5)

RXLEVUL60Range60

Received signal strength uplink in the range -50 dBm

Data Source

RXLEVUL(60,60)

RXLEVUL61Range61

Received signal strength uplink in the range -49 dBm

Data Source

RXLEVUL(61,61)

RXLEVUL62Range62

Received signal strength uplink in the range -48 dBm

Data Source

RXLEVUL(62,62)

RXLEVUL63Range63

Received signal strength uplink in the range -47 dBm

Data Source

RXLEVUL(63,63)

RXLEVUL6Range6

Received signal strength uplink in the range -104 dBm

Data Source

RXLEVUL(6,6)

RXLEVUL7Range7

Received signal strength uplink in the range -103 dBm

Data Source

RXLEVUL(7,7)

RXLEVUL8Range8

Received signal strength uplink in the range -102 dBm

Data Source

RXLEVUL(8,8)

RXLEVUL9Range9

Received signal strength uplink in the range -101 dBm

Data Source

RXLEVUL(9,9)

RXQUALDL0Range0

Received signal quality on downlink in the range 0 GSM Unit

Data Source

RXQUALDL(0,0)

RXQUALDL1Range1

Received signal quality on downlink in the range 1 GSM Unit

Data Source

RXQUALDL(1,1)

RXQUALDL2Range2

Received signal quality on downlink in the range 2 GSM Unit

Data Source

RXQUALDL(2,2)

RXQUALDL3Range3

Received signal quality on downlink in the range 3 GSM Unit

Data Source

RXQUALDL(3,3)

RXQUALDL4Range4

Received signal quality on downlink in the range 4 GSM Unit

Data Source

RXQUALDL(4,4)

RXQUALDL5Range5

Received signal quality on downlink in the range 5 GSM Unit

Data Source

RXQUALDL(5,5)

RXQUALDL6Range6

Received signal quality on downlink in the range 6 GSM Unit

Data Source

RXQUALDL(6,6)

RXQUALDL7Range7

Received signal quality on downlink in the range 7 GSM Unit

Data Source

RXQUALDL(7,7)

RXQUALUL0Range0

Received signal quality on uplink in the range 0 GSM Unit

Data Source

RXQUALUL(0,0)

RXQUALUL1Range1

Received signal quality on uplink in the range 1 GSM Unit

Data Source

RXQUALUL(1,1)

RXQUALUL2Range2

Received signal quality on uplink in the range 2 GSM Unit

Data Source

RXQUALUL(2,2)

RXQUALUL3Range3

Received signal quality on uplink in the range 3 GSM Unit

Data Source

RXQUALUL(3,3)

RXQUALUL4Range4

Received signal quality on uplink in the range 4 GSM Unit

Data Source

RXQUALUL(4,4)

RXQUALUL5Range5

Received signal quality on uplink in the range 5 GSM Unit

Data Source

RXQUALUL(5,5)

RXQUALUL6Range6

Received signal quality on uplink in the range 6 GSM Unit

Data Source

RXQUALUL(6,6)

RXQUALUL7Range7

Received signal quality on uplink in the range 7 GSM Unit

Data Source

RXQUALUL(7,7)

TAVAL0Range0

Actual timing advance in the range 0 GSM Unit

Data Source

TAVAL(0,0)

TAVAL104Range113

Actual timing advance in the range 104 to 113 GSM Unit

Data Source

TAVAL(104,113)

TAVAL10Range10

Actual timing advance in the range 10 GSM Unit

Data Source

TAVAL(10,10)

TAVAL114Range123

Actual timing advance in the range 114 to 123 GSM Unit

Data Source

TAVAL(114,123)

TAVAL11Range11

Actual timing advance in the range 11 GSM Unit

Data Source

TAVAL(11,11)

TAVAL124Range133

Actual timing advance in the range 124 to 133 GSM Unit

Data Source

TAVAL(124,133)

TAVAL12Range12

Actual timing advance in the range 12 GSM Unit

Data Source

TAVAL(12,12)

TAVAL134Range143

Actual timing advance in the range 134 to 143 GSM Unit

Data Source

TAVAL(134,143)

TAVAL13Range13

Actual timing advance in the range 13 GSM Unit

Data Source

TAVAL(13,13)

TAVAL144Range163

Actual timing advance in the range 144 to 163 GSM Unit

Data Source

TAVAL(144,163)

TAVAL14Range14

Actual timing advance in the range 14 GSM Unit

Data Source

TAVAL(14,14)

TAVAL15Range15

Actual timing advance in the range 15 GSM Unit

Data Source

TAVAL(15,15)

TAVAL164Range183

Actual timing advance in the range 164 to 183 GSM Unit

Data Source

TAVAL(164,183)

TAVAL16Range16

Actual timing advance in the range 16 GSM Unit

Data Source

TAVAL(16,16)

TAVAL17Range17

Actual timing advance in the range 17 GSM Unit

Data Source

TAVAL(17,17)

TAVAL184Range203

Actual timing advance in the range 184 to 203 GSM Unit

Data Source

TAVAL(184,203)

TAVAL18Range18

Actual timing advance in the range 18 GSM Unit

Data Source

TAVAL(18,18)

TAVAL19Range19

Actual timing advance in the range 19 GSM Unit

Data Source

TAVAL(19,19)

TAVAL1Range1

Actual timing advance in the range 1 GSM Unit

Data Source

TAVAL(1,1)

TAVAL204Range219

Actual timing advance in the range 204 to 219 GSM Unit

Data Source

TAVAL(204,219)

TAVAL20Range20

Actual timing advance in the range 20 GSM Unit

Data Source

TAVAL(20,20)

TAVAL21Range21

Actual timing advance in the range 21 GSM Unit

Data Source

TAVAL(21,21)

TAVAL22Range22

Actual timing advance in the range 22 GSM Unit

Data Source

TAVAL(22,22)

TAVAL23Range23

Actual timing advance in the range 23 GSM Unit

Data Source

TAVAL(23,23)

TAVAL24Range24

Actual timing advance in the range 24 GSM Unit

Data Source

TAVAL(24,24)

TAVAL25Range25

Actual timing advance in the range 25 GSM Unit

Data Source

TAVAL(25,25)

TAVAL26Range26

Actual timing advance in the range 26 GSM Unit

Data Source

TAVAL(26,26)

TAVAL27Range27

Actual timing advance in the range 27 GSM Unit

Data Source

TAVAL(27,27)

TAVAL28Range28

Actual timing advance in the range 28 GSM Unit

Data Source

TAVAL(28,28)

TAVAL29Range29

Actual timing advance in the range 29 GSM Unit

Data Source

TAVAL(29,29)

TAVAL2Range2

Actual timing advance in the range 2 GSM Unit

Data Source

TAVAL(2,2)

TAVAL30Range30

Actual timing advance in the range 30 GSM Unit

Data Source

TAVAL(30,30)

TAVAL31Range31

Actual timing advance in the range 31 GSM Unit

Data Source

TAVAL(31,31)

TAVAL32Range32

Actual timing advance in the range 32 GSM Unit

Data Source

TAVAL(32,32)

TAVAL33Range33

Actual timing advance in the range 33 GSM Unit

Data Source

TAVAL(33,33)

TAVAL34Range34

Actual timing advance in the range 34 GSM Unit

Data Source

TAVAL(34,34)

TAVAL35Range35

Actual timing advance in the range 35 GSM Unit

Data Source

TAVAL(35,35)

TAVAL36Range36

Actual timing advance in the range 36 GSM Unit

Data Source

TAVAL(36,36)

TAVAL37Range37

Actual timing advance in the range 37 GSM Unit

Data Source

TAVAL(37,37)

TAVAL38Range38

Actual timing advance in the range 38 GSM Unit

Data Source

TAVAL(38,38)

TAVAL39Range39

Actual timing advance in the range 39 GSM Unit

Data Source

TAVAL(39,39)

TAVAL3Range3

Actual timing advance in the range 3 GSM Unit

Data Source

TAVAL(3,3)

TAVAL40Range40

Actual timing advance in the range 40 GSM Unit

Data Source

TAVAL(40,40)

TAVAL41Range41

Actual timing advance in the range 41 GSM Unit

Data Source

TAVAL(41,41)

TAVAL42Range42

Actual timing advance in the range 42 GSM Unit

Data Source

TAVAL(42,42)

TAVAL43Range43

Actual timing advance in the range 43 GSM Unit

Data Source

TAVAL(43,43)

TAVAL44Range44

Actual timing advance in the range 44 GSM Unit

Data Source

TAVAL(44,44)

TAVAL45Range45

Actual timing advance in the range 45 GSM Unit

Data Source

TAVAL(45,45)

TAVAL46Range46

Actual timing advance in the range 46 GSM Unit

Data Source

TAVAL(46,46)

TAVAL47Range47

Actual timing advance in the range 47 GSM Unit

Data Source

TAVAL(47,47)

TAVAL48Range48

Actual timing advance in the range 48 GSM Unit

Data Source

TAVAL(48,48)

TAVAL49Range49

Actual timing advance in the range 49 GSM Unit

Data Source

TAVAL(49,49)

TAVAL4Range4

Actual timing advance in the range 4 GSM Unit

Data Source

TAVAL(4,4)

TAVAL50Range50

Actual timing advance in the range 50 GSM Unit

Data Source

TAVAL(50,50)

TAVAL51Range51

Actual timing advance in the range 51 GSM Unit

Data Source

TAVAL(51,51)

TAVAL52Range52

Actual timing advance in the range 52 GSM Unit

Data Source

TAVAL(52,52)

TAVAL53Range53

Actual timing advance in the range 53 GSM Unit

Data Source

TAVAL(53,53)

TAVAL54Range54

Actual timing advance in the range 54 GSM Unit

Data Source

TAVAL(54,54)

TAVAL55Range55

Actual timing advance in the range 55 GSM Unit

Data Source

TAVAL(55,55)

TAVAL56Range56

Actual timing advance in the range 56 GSM Unit

Data Source

TAVAL(56,56)

TAVAL57Range57

Actual timing advance in the range 57 GSM Unit

Data Source

TAVAL(57,57)

TAVAL58Range58

Actual timing advance in the range 58 GSM Unit

Data Source

TAVAL(58,58)

TAVAL59Range59

Actual timing advance in the range 59 GSM Unit

Data Source

TAVAL(59,59)

TAVAL5Range5

Actual timing advance in the range 5 GSM Unit

Data Source

TAVAL(5,5)

TAVAL60Range60

Actual timing advance in the range 60 GSM Unit

Data Source

TAVAL(60,60)

TAVAL61Range61

Actual timing advance in the range 61 GSM Unit

Data Source

TAVAL(61,61)

TAVAL62Range62

Actual timing advance in the range 62 GSM Unit

Data Source

TAVAL(62,62)

TAVAL63Range63

Actual timing advance in the range 63 GSM Unit

Data Source

TAVAL(63,63)

TAVAL64Range73

Actual timing advance in the range 64 GSM Unit

Data Source

TAVAL(64,73)

TAVAL6Range6

Actual timing advance in the range 6 GSM Unit

Data Source

TAVAL(6,6)

TAVAL74Range83

Actual timing advance in the range 74 GSM Unit

Data Source

TAVAL(74,83)

TAVAL7Range7

Actual timing advance in the range 7 GSM Unit

Data Source

TAVAL(7,7)

TAVAL84Range93

Actual timing advance in the range 84 GSM Unit

Data Source

TAVAL(84,93)

TAVAL8Range8

Actual timing advance in the range 8 GSM Unit

Data Source

TAVAL(8,8)

TAVAL94Range103

Actual timing advance in the range 94 to 103 GSM Unit

Data Source

TAVAL(94,103)

TAVAL9Range9

Actual timing advance in the range 9 GSM Unit

Data Source

TAVAL(9,9)

Subsystem_Number Primitive Calculations

The following is a list of primitive calculations for the Subsystem_Number entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Subsystem_Number Peg Counts

The following is a list of peg counts for the Subsystem_Number entity.

COMINCINT

Total incoming intermediate node connection oriented messages per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMINCINT

Source Section

SS7SCSUBSY

COMOUTINT

Total outgoing intermediate node connection oriented messages per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMOUTINT

Source Section

SS7SCSUBSY

COMSGORIG

Total connection oriented messages originating per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMSGORIG

Source Section

SS7SCSUBSY

COMSGTERM

Total connection oriented messages terminating per local SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMSGTERM

Source Section

SS7SCSUBSY

DT1ORIG

DT1 originating per local SSN

Data Source

BSC_IQG20_APG40

Source Field

DT1ORIG

Source Section

SS7SCSUBSY

DT1TERM

Data Form 1 (DT1) terminating per local SSN.

Data Source

BSC_IQG20_APG40

Source Field

DT1TERM

Source Section

SS7SCSUBSY

PERLEN

Period Length

Super_Channel Primitive Calculations

The following is a list of primitive calculations for the Super_Channel entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Super_Channel Peg Counts

The following is a list of peg counts for the Super_Channel entity.

AVDELDLSCBUF

Indicates the average delay of CS frames and PS frames in the super channel buffers downlink, in the PGW

Data Source

BSC_APG40

Source Field

AVDELDLSCBUF

Source Section

SUPERCH

AVDELULSCBUF

Indicates the average delay of CS frames and PS frames in the super channel buffers uplink, in the BTS

Data Source

BSC_APG40

Source Field

AVDELULSCBUF

Source Section

SUPERCH

DL7075SCLOAD

Counts the number of scans where the traffic load was between 70% and 75%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL7075SCLOAD

Source Section

SUPERCH2

DL7680SCLOAD

Counts the number of scans where the traffic load was between 76% and 80%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL7680SCLOAD

Source Section

SUPERCH2

DL8185SCLOAD

Counts the number of scans where the traffic load was between 81% and 85%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL8185SCLOAD

Source Section

SUPERCH2

DL8690SCLOAD

Counts the number of scans where the traffic load was between 86% and 90%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL8690SCLOAD

Source Section

SUPERCH2

DL9195SCLOAD

Counts the number of scans where the traffic load was between 91% and 95%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL9195SCLOAD

Source Section

SUPERCH2

DL9600SCLOAD

Counts the number of scans where the traffic load was between 96% and 100%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL9600SCLOAD

Source Section

SUPERCH2

DLCSSCBUFTHR

Number of CS frames discarded in the SC buffer, DL

Data Source

BSC_APG40

Source Field

DLCSSCBUFTHR

Source Section

SUPERCH

DLPSSCBUFTHR

Number of PS frames discarded in the SC buffer, DL

Data Source

BSC_APG40

Source Field

DLPSSCBUFTHR

Source Section

SUPERCH

KBMAXREC

Maximum number of kbytes per second received by PGW in latest 15-minute interval

Data Source

BSC_APG40

Source Field

KBMAXREC

Source Section

SUPERCH

KBMAXSENT

Maximum number of kbytes per second sent by PGW in latest 15-minute interval

Data Source

BSC_APG40

Source Field

KBMAXSENT

Source Section

SUPERCH

KBREC

Accumulated number of kbytes received by the PGW

Data Source

BSC_APG40

Source Field

KBREC

Source Section

SUPERCH

KBSCAN

The time for which the counters KBSENT and KBREC have been accumulated

Data Source

BSC_APG40

Source Field

KBSCAN

Source Section

SUPERCH

KBSENT

Accumulated number of kbytes sent by the PGW

Data Source

BSC_APG40

Source Field

KBSENT

Source Section

SUPERCH

LOSTDLPACK

Accumulated number of lost CS and PS frames on the DL.

Data Source

BSC_APG40

Source Field

LOSTDLPACK

Source Section

SUPERCH

LOSTULPACK

Accumulated number of lost CS and PS frames on the UL.

Data Source

BSC_APG40

Source Field

LOSTULPACK

Source Section

SUPERCH

SC

Super Channel within Super Channel Group

Data Source

BSC_APG40

Source Field

SC

Source Section

SUPERCH

SCGR

Super Channel Group

Data Source

BSC_APG40

Source Field

SCGR

Source Section

SUPERCH

THRDLPACK

Accumulated number of CS and PS frames discarded on the DL by the PGW due to Abis overload.

Data Source

BSC_APG40

Source Field

THRDLPACK

Source Section

SUPERCH

THRULPACK

Accumulated estimation of number of CS and PS frames discarded on the UL by the BTS due to Abis overload.

Data Source

BSC_APG40

Source Field

THRULPACK

Source Section

SUPERCH

TOTDLPSSCFRBUF

Counts the total number of PS frames passing through the super channel buffers downlink, in the PGW

Data Source

BSC_APG40

Source Field

TOTDLPSSCFRBUF

Source Section

SUPERCH

TOTFRDLSCBUF

Total number of CS frames passing through SC buffer, DL

Data Source

BSC_APG40

Source Field

TOTFRDLSCBUF

Source Section

SUPERCH

TOTFRULSCBUF

Total number of CS frames passing through SC buffer, UL

Data Source

BSC_APG40

Source Field

TOTFRULSCBUF

Source Section

SUPERCH

TOTULPSSCFRBUF

Total number of PS frames passing through SC buffer, UL

Data Source

BSC_APG40

Source Field

TOTULPSSCFRBUF

Source Section

SUPERCH

UL7075SCLOAD

Counts the number of scans where the traffic load was between 70% and 75%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL7075SCLOAD

Source Section

SUPERCH2

UL7680SCLOAD

Counts the number of scans where the traffic load was between 76% and 80%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL7680SCLOAD

Source Section

SUPERCH2

UL8185SCLOAD

Counts the number of scans where the traffic load was between 81% and 85%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL8185SCLOAD

Source Section

SUPERCH2

UL8690SCLOAD

Counts the number of scans where the traffic load was between 86% and 90%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL8690SCLOAD

Source Section

SUPERCH2

UL9195SCLOAD

Counts the number of scans where the traffic load was between 91% and 95%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL9195SCLOAD

Source Section

SUPERCH2

UL9600SCLOAD

Counts the number of scans where the traffic load was between 96% and 100%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL9600SCLOAD

Source Section

SUPERCH2

ULPSSCBUFTHR

Counts the number of PS frames discarded in the super channel buffers uplink, in the BTS

Data Source

BSC_APG40

Source Field

ULPSSCBUFTHR

Source Section

SUPERCH

ULSCBUFTHR

Number of CS frames discarded in the SC buffer, UL

Data Source

BSC_APG40

Source Field

ULSCBUFTHR

Source Section

SUPERCH

SUPPSERVICE Primitive Calculations

The following is a list of primitive calculations for the SUPPSERVICE entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

SUPPSERVICE Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SUPPSERVICE Peg Counts

The following is a list of peg counts for the SUPPSERVICE entity.

MSC_RELEASE

Release

NSSINTTOT

Number of interrogations to VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSINTTOT

Source Section

SUPPLSERV

NSSINVTOT

Number of invocations

Data Source

MSC_IOG20_APG40

Source Field

NSSINVTOT

Source Section

SUPPLSERV

NSSIT1TOT

Number of interrogations by subscribers from OP1

Data Source

MSC_IOG20_APG40

Source Field

NSSIT1TOT

Source Section

SUPPLSERV

NSSIT2TOT

Number of interrogations by subscribers from OP2

Data Source

MSC_IQG20_APG40

Source Field

NSSIT2TOT

Source Section

SUPPLSERV

NSSIV1TOT

Number of invocations by subscribers from OP1

Data Source

MSC_IQG20_APG40

Source Field

NSSIV1TOT

Source Section

SUPPLSERV

NSSIV2TOT

Number of invocations by subscribers from OP2

Data Source

MSC_IQG20_APG40

Source Field

NSSIV2TOT

Source Section

SUPPLSERV

NSSIVS1TOT

successful USSD requests made by subscribers from operator 1 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVS1TOT

Source Section

SUPPLSERV

NSSIVS2TOT

successful USSD requests made by subscribers from operator 2 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVS2TOT

Source Section

SUPPLSERV

NSSIVSTOT

successful USSD requests made by subscribers not belonging to operator 1 or operator 2 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVSTOT

Source Section

SUPPLSERV

NSSRETTOT

retrievals of held call for subscribers not belonging to operator 1 and operator 2 in MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSRETTOT

Source Section

SUPPLSERV

NSSRT1TOT

Number of retrievals of held call for subscribers of operator 1 in MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSRT1TOT

Source Section

SUPPLSERV

NSSRT2TOT

Number of retrievals of held call for subscribers of operator 2 in MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSRT2TOT

Source Section

SUPPLSERV

PERLEN

Period Length

Switch_Netw_Terminal Primitive Calculations

The following is a list of primitive calculations for the Switch_Netw_Terminal entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Switch_Netw_Terminal Peg Counts

The following is a list of peg counts for the Switch_Netw_Terminal entity.

BLOL

Number of blocked SRSs. Incremented when an SRS unit is manually or automatically blocked. Decremented when an SRS unit is manually or automatically deblocked. It should be noted that an SRS unit is considered blocked when both plane A and plane B are blocked and likewise the SRS unit is considered deblocked when either plane A or plane B is deblocked.

Data Source

BSC_IQG20_APG40

Source Field

BLOL

Source Section

SNT

NBLOCACC

Accumulated number of blocked devices

Data Source

BSC_IQG20_APG40

Source Field

NBLOCACC

Source Section

SNT

NDEV

Number of connected SRSs. Incremented every time an SRS unit is connected. Decremented when an SRS unit is disconnected.

Data Source

BSC_IQG20_APG40

Source Field

NDEV

Source Section

SNT

PERLEN

Period Length

Synchr_Digi_paths Primitive Calculations

The following is a list of primitive calculations for the Synchr_Digi_paths entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

System Primitive Calculations

The following is a list of primitive calculations for the System entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PercentActiveSubscribers

Percent Active Subscribers

Calculation

$$\frac{\text{sum}(\text{MSC.HLRSubs}[\text{subString}(\text{LocalKey}, 1, 6) = "420608"], \text{NHLRREGAST})}{\text{sum}(\text{HLR}, \text{NSUBSCNT})} * 100.0$$

PercentRegisteredSubscribers

Percent Registered Subscribers

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) = "420608"], NHLRMSST ) * 100.0 /  
sum(HLR, NSUBSCNT)
```

pTotalGGSNPacketSuccessRate

Total GGSN Packet Success Rate is the Total Average Success Factor of the overall Packets sent to and Received from ALL GGSNs

Calculation

```
aggr( GSNTType.GSN, pGGSNPacketSuccessRate )
```

pTotalSessionManSuccessRateGGSN

Total Session Management Success Rate

Calculation

```
aggr( GSNTType.GSN, pSessionManSuccessRateGGSN )
```

RegisteredInroamers

Registered Inroamers

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) != "420608"], NHLRMSST)
```

RegisteredOutroamer

Registered Outroamers

Calculation

```
sum(HLR.PLMN[subString(LocalKey, 1, 6) != "420608"], vsum( GPPERPLMNCNT,  
PERPLMNCNT ))
```

SubscribersHLR

Subscribers in HLR

Calculation

```
AGGR(HLR, NSUBSCNT)
```

SubscribersVLR

Subscribers in VLR

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) = "420608"], NHLRMSST)
```

TotalCellTCHTraffic

Average TCH/F Traffic Level

Calculation

```
protect(sum(MSC.BSC.BTSSite.Cell, TCF_TRAFF_VOL))
```

TotalSwitchedTraffic

Generates a predefined graph showing total switch traffic in the network and total air traffic

Calculation

```
sum(MSC, TotalSwitchedTraffic)
```

TCAP_Obj Primitive Calculations

The following is a list of primitive calculations for the TCAP_Obj entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

```
""
```

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT()
```

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

TCAP_Obj Peg Counts

The following is a list of peg counts for the TCAP_Obj entity.

DETECT

Numbers of situations when reject is detected by TC

Data Source

MSC_IQG20_APG40

Source Field

DETECT

Source Section

TCREJ

MSC_RELEASE

Release

PERLEN

Period Length

RECEIVED_TCCMP

Number of components received

Data Source

MSC_IQG20_APG40

Source Field

RECEIVED

Source Section

TCCMP

RECEIVED_TCDIA

Number of dialogue portions received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCDIA

RECEIVED_TCMMSG

Number of messages received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCMSG

SENT_TCCMP

Number of components sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCCMP

SENT_TCDIA

Number of dialogue portions sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCDIA

SENT_TCMSG

Number of messages sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCMSG

URECEIVED

Number of rejects received by TC-user

Data Source

MSC_IOG20_APG40

Source Field

URECEIVED

Source Section

TCREJ

USENT

Number of rejects sent by TC-user

Data Source

MSC_IOG20_APG40

Source Field

USENT

Source Section

TCREJ

TCAP_SubSystem Primitive Calculations

The following is a list of primitive calculations for the TCAP_SubSystem entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TCAP_SubSystem Peg Counts

The following is a list of peg counts for the TCAP_SubSystem entity.

MSC_RELEASE

Release

NMSGDLVDSSN

Number of messages successfully delivered to specific application

Data Source

MSC_IOG20_APG40

Source Field

NMSGDLVDSSN

Source Section

TPLAT

NMSGORIGSSN

Number of messages originated from a specific application

Data Source

MSC_IOG20_APG40

Source Field

NMSGORIGSSN

Source Section

TPLAT

PERLEN

Period Length

Time_Slot Primitive Calculations

The following is a list of primitive calculations for the Time_Slot entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Time_Slot Peg Counts

The following is a list of peg counts for the Time_Slot entity.

BSS_RELEASE

Release

CONCNT

Connection set up attempt

Data Source

BSC_IQG20_APG40

Source Field

CONCNT

Source Section

MOTS

CONERRCNT

Time out or radio link failure

Data Source

BSC_IQG20_APG40

Source Field

CONERRCNT

Source Section

MOTS

ID1_MOTS

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTS

ID2_MOTS

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTS

PERLEN

Period Length

TrafficType Primitive Calculations

The following is a list of primitive calculations for the TrafficType entity.

AnsSwitchedCalls

Answered Switched Calls

Calculation

NANSW

FailedSwitchedCalls

Failed Switched Calls

Calculation

vsum(NUNSUC, NECONG)

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

INTERVALS_TRART

Number of 60 minute intervals covered (from TRART data)

Calculation

PERLEN_TRART / (1.0 * 60)

NANSW

B-ANSWERS

Calculation

nullValue(NANSW_TRAFFTYPE, NANSW_MTRAFFTYPE)

NCALLS

Number of attempted calls

Calculation

nullValue(NCALLS_TRAFFTYPE, NCALLS_MTRAFFTYPE)

NECONG

EXTERNAL CONG

Calculation

nullValue(NECONG_TRAFFTYPE, NECONG_MTRAFFTYPE)

NICONG

INTERNAL CONG

Calculation

nullValue(NICONG_TRAFFTYPE, NICONG_MTRAFFTYPE)

NSCAN

Number of accumulations

Calculation

nullValue(NSCAN_TRAFFTYPE, NSCAN_MTRAFFTYPE)

NTRALACC

TRAFFIC LEVEL

Calculation

nullValue(NTRALACC_TRAFFTYPE, NTRALACC_MTRAFFTYPE)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

NUNSUCC

CALL ATTEMPTS

Calculation

$\text{nullValue}(\text{NUNSUCC_TRAFFTYPE}, \text{NUNSUCC_MTRAFFTYPE})$

PercentageAnsweredSwitchedCalls

Percentage Answered Switched Calls

Calculation

$(100 * \text{NANSW}) / (1.0 * \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))$

PercentageFailedSwitchedCalls

Percentage Failed Switched Calls

Calculation

$(100 * \text{vsum}(\text{NUNSUCC}, \text{NECONG})) / (1.0 * \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))$

SwitchedAttmpt

Switched Attempt

Calculation

NCALLS

SwitchedCalls

Switched Calls

Calculation

$\text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG})$

SwitchedTraffic

Switched Traffic

Calculation

$\text{NTRALACC} / (1.0 * \text{NSCAN})$

TT_AnsBidRatio

Percentage Answers:Bid Ratio

Calculation

$\text{NANSW} * 100.0 / \text{NCALLS}$

TT_AnsSeizeRatio

Percentage Answers:Seize Ratio

Calculation

$\text{NANSW} * 100.0 / \text{TT_Seizures}$

TT_RejCalls

Number of Seizures

Calculation

$\text{vsum}(\text{NUNSUCC}, \text{NICONG}, \text{NECONG})$

TT_Seizures

Number of Seizures

Calculation

$\text{vsum}(\text{NCALLS}, -1 * \text{NUNSUCC}, -1 * \text{NICONG}, -1 * \text{NECONG})$

TT_Traffic

Traffic Level in Erlangs

Calculation

$\text{NTRALACC} / (1.0 * \text{NSCAN})$

VENDORTECH

Vendor Technology

Calculation

$\text{isNull}(\text{PERLEN}) ? \text{nullString}() : \text{"EricssonGSM"}$

TrafficType Peg Counts

The following is a list of peg counts for the TrafficType entity.

MSC_RELEASE

Release

NANSW_MTRAFTYPE

Number of answers, renewed answers are not counted

Data Source

MSC_IQG20_APG40

Source Field

NANSW

Source Section

MTRAFTYPE

NANSW_TRAFFTYPE

B-ANSWERS

Data Source

MSC_IQG20_APG40

Source Field

NANSW

Source Section

TRAFFTYPE

NAREPLACE

DUE A-REPLACEMENT

Data Source

MSC_IQG20_APG40

Source Field

NAREPLACE

Source Section

TRAFFTYPE

NBLOBY

Accumulated value of the number of blocked both-way devices

Data Source

MSC_TRART

Source Field

NBLOBY

Source Section

ASC_TRART

NBLOOY

Accumulated value of the number of blocked one-way devices

Data Source

MSC_TRART

Source Field

NBLOOY

Source Section

ASC_TRART

NBUSY

REJ, BUSY B-SUB

Data Source

MSC_IQG20_APG40

Source Field

NBUSY

Source Section

TRAFFTYPE

NCALLS_MTRAFFTYPE

Number of calls recognized by the register function

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

MTRAFFTYPE

NCALLS_TRAFFTYPE

CALLS ATTEMPTS

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

TRAFFTYPE

NCONSIG

DUE CONGESTION

Data Source

MSC_IQG20_APG40

Source Field

NCONSIG

Source Section

TRAFFTYPE

NDVB

Number of both-way devices

Data Source

MSC_TRART

Source Field

NDVB

Source Section

ASC_TRART

NDVO

Number of one-way devices

Data Source

MSC_TRART

Source Field

NDVO

Source Section

ASC_TRART

NECONG_MTRAFTYPE

calls rejected due to external congestion, I.E. congestion due to lack of outgoing trunks

Data Source

MSC_IQG20_APG40

Source Field

NECONG

Source Section

MTRAFTYPE

NECONG_TRAFFTYPE

EXTERNAL CONG

Data Source

MSC_IQG20_APG40

Source Field

NECONG

Source Section

TRAFFTYPE

NFAULTSIG

DUE FAULTY SIGNA

Data Source

MSC_IOG20_APG40

Source Field

NFAULTSIG

Source Section

TRAFFTYPE

NICONG_MTRAFTYPE

calls rejected due to internal congestion,I.E. congestion in group switch,too many reselections of Outgoing route, or congestion at seizure of RE complex and block CLCOF

Data Source

MSC_IOG20_APG40

Source Field

NICONG

Source Section

MTRAFTYPE

NICONG_TRAFFTYPE

INTERNAL CONG

Data Source

MSC_IOG20_APG40

Source Field

NICONG

Source Section

TRAFFTYPE

NINACC

INACCESS B-NO

Data Source

MSC_IQG20_APG40

Source Field

NINACC

Source Section

TRAFFTYPE

NISDNCALLS

CALLS

Data Source

MSC_IQG20_APG40

Source Field

NISDNCALLS

Source Section

TRAFFTYPE

NLKPDSIG

DUE PROC SEND SIG

Data Source

MSC_IQG20_APG40

Source Field

NLKPDSIG

Source Section

TRAFFTYPE

NNMBLOC

REJ, NM ACTION

Data Source

MSC_IOG20_APG40

Source Field

NNMBLOC

Source Section

TRAFFTYPE

NNONEX

NONEXIST B-SUB

Data Source

MSC_IOG20_APG40

Source Field

NNONEX

Source Section

TRAFFTYPE

NRELAFTD

REL AFT DIAL

Data Source

MSC_IOG20_APG40

Source Field

NRELAFTD

Source Section

TRAFFTYPE

NRELBEFD

REL BEF DIAL

Data Source

MSC_IOG20_APG40

Source Field

NRELBEFD

Source Section

TRAFFTYPE

NRELDURD

REL DUR DIAL

Data Source

MSC_IQG20_APG40

Source Field

NRELDURD

Source Section

TRAFFTYPE

NSCAN_MTRAFFTYPE

Number of accumulated Values in NTRALACC

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

MTRAFFTYPE

NSCAN_TRAFFTYPE

ACCUMULATIONS

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

TRAFFTYPE

NSUEOS

Number of successful end-of-selections

Data Source

MSC_IQG20_APG40

Source Field

NSUEOS

Source Section

MTRAFFTYPE

NTHCON

CONNECTED CALLS

Data Source

MSC_IQG20_APG40

Source Field

NTHCON

Source Section

TRAFFTYPE

NTIMEOUT

DUE TIME LIM OWFL

Data Source

MSC_IQG20_APG40

Source Field

NTIMEOUT

Source Section

TRAFFTYPE

NTOBEFD

T.O. BEF DIAL

Data Source

MSC_IQG20_APG40

Source Field

NTOBEFD

Source Section

TRAFFTYPE

NTODURD

T.O. DUR DIAL

Data Source

MSC_IQG20_APG40

Source Field

NTODURD

Source Section

TRAFFTYPE

NTRALACC_MTRAFFTYPE

Accumulates the value of TRAL per NSCAN interval

Data Source

MSC_IQG20_APG40

Source Field

NTRALACC

Source Section

MTRAFFTYPE

NTRALACC_TRAFFTYPE

TRAFFIC LEVEL

Data Source

MSC_IOG20_APG40

Source Field

NTRALACC

Source Section

TRAFFTYPE

NUNSUCC_MTRAFFTYPE

unsuccessful calls, I.E. congestion due to auxiliary device groups, common control groups and calls lost to technical faults within the exchange, or time-out

Data Source

MSC_IOG20_APG40

Source Field

NUNSUCC

Source Section

MTRAFFTYPE

NUNSUCC_TRAFFTYPE

CALL ATTEMPTS

Data Source

MSC_IOG20_APG40

Source Field

NUNSUCC

Source Section

TRAFFTYPE

PERLEN

Period Length

PERLEN_TRART

Period Length (of TRAR data)

TRAL_MTRAFTYPE

Traffic level, number of ongoing through-connected calls

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

MTRAFTYPE

TRAL_TRAFFTYPE

OCCUPIED DEVICES

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

TRAFFTYPE

TraffOrigin Primitive Calculations

The following is a list of primitive calculations for the TraffOrigin entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

TraffOrigin Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transceiver_Group Primitive Calculations

The following is a list of primitive calculations for the Transceiver_Group entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transceiver_Group Peg Counts

The following is a list of peg counts for the Transceiver_Group entity.

AVG16K

Average number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute

Data Source

BSC_IQG20_APG40

Source Field

AVG16K

Source Section

NONRES64K

AVG64K

Average number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. Mean over time and Mean over space.

Data Source

BSC_IQG20_APG40

Source Field

AVG64K

Source Section

RES64K

BSS_Release

Release

BUNDG0AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 0 (RSL)

Data Source

BSC_APG40

Source Field

BUNDG0AVEDL

Source Section

ABISTG

BUNDG1AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 10 (Speech)

Data Source

BSC_APG40

Source Field

BUNDG1AVEDL

Source Section

ABISTG

BUNDG2AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI =11 (CS data)

Data Source

BSC_APG40

Source Field

BUNDG2AVEDL

Source Section

ABISTG

BUNDG3AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 12 (GPRS/EDGE)

Data Source

BSC_APG40

Source Field

BUNDG3AVEDL

Source Section

ABISTG

BUNDG4AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 62 (OML)

Data Source

BSC_APG40

Source Field

BUNDG4AVEDL

Source Section

ABISTG

CSDISCOVL

The number of discarded CS frames DL at IP overload actions

Data Source

BSC_APG40

Source Field

CSDISCOVL

Source Section

ABISIP

DL0025JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 0% and 25% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL0025JITBUFDEL

Source Section

ABISTG

DL100JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was more than 100% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL100JITBUFDEL

Source Section

ABISTG

DL100STNLOAD

Number of scans where the traffic load on the PGW - STN link was above 100%, DL

Data Source

BSC_APG40

Source Field

DL100STNLOAD

Source Section

ABISIP

DL2650JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 26% and 50% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL2650JITBUFDEL

Source Section

ABISTG

DL5175JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 51% and 75% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL5175JITBUFDEL

Source Section

ABISTG

DL7075STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 70% and 75%, DL

Data Source

BSC_APG40

Source Field

DL7075STNLOAD

Source Section

ABISIP

DL7600JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 76% and 100% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL7600JITBUFDEL

Source Section

ABISTG

DL7680STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 76% and 80%, DL

Data Source

BSC_APG40

Source Field

DL7680STNLOAD

Source Section

ABISIP

DL8185STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 81% and 85%, DL

Data Source

BSC_APG40

Source Field

DL8185STNLOAD

Source Section

ABISIP

DL8690STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 86% and 90%, DL

Data Source

BSC_APG40

Source Field

DL8690STNLOAD

Source Section

ABISIP

DL9195STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 91% and 95%, DL

Data Source

BSC_APG40

Source Field

DL9195STNLOAD

Source Section

ABISIP

DL9600STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 96% and 100%,
DL

Data Source

BSC_APG40

Source Field

DL9600STNLOAD

Source Section

ABISIP

DLDROPJBUF

Counts the number of discarded CS frames in jitter buffer, DL. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DLDROPJBUF

Source Section

ABISTG

DLJITBUFAVDEL

Counts the average jitter buffer delay on the DL. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DLJITBUFAVDEL

Source Section

ABISTG

FRAG64K

Fragmentation level of the 64KRES pool, i.e. the number of fragmented (partly used) 64 kbps
Abis paths in the 64KRES pool

Data Source

BSC_IQG20_APG40

Source Field

FRAG64K

Source Section

RES64K

ID1

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTG

ID2

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTG

INTERCNT

Intermittent faults. Incremented when an intermittent fault is reported on one of the managed objects within the TG.

Data Source

BSC_IQG20_APG40

Source Field

INTERCNT

Source Section

MOTG

IPDLSENTPACK

Accumulated number of IP packets sent DL on the PGW - STN link

Data Source

BSC_APG40

Source Field

IPDLSENTPACK

Source Section

ABISIP

IPLOSTPACKUL

Accumulated number of IP packets either lost on the UL or received with a checksum error

Data Source

BSC_APG40

Source Field

IPLOSTPACKUL

Source Section

ABISIP

IPNUMSCAN

The time for which the counters IPSENTKBYTES and IPRECKBYTES have been accumulated

Data Source

BSC_APG40

Source Field

IPNUMSCAN

Source Section

ABISIP

IPOVLL1

Indicates the number of level 1 actions taken to solve overload on Abis

Data Source

BSC_APG40

Source Field

IPOVLL1

Source Section

ABISIP

IPOVLL2

Indicates the number of level 2 actions taken to solve overload on Abis

Data Source

BSC_APG40

Source Field

IPOVLL2

Source Section

ABISIP

IPRECKBYTES

Total amount of traffic received by the PGW

Data Source

BSC_APG40

Source Field

IPRECKBYTES

Source Section

ABISIP

IPSENTKBYTES

Total amount of traffic sent by the PGW

Data Source

BSC_APG40

Source Field

IPSENTKBYTES

Source Section

ABISIP

IPULRECPACK

Accumulated number of IP packets received UL on the PGW - STN link

Data Source

BSC_APG40

Source Field

IPULRECPACK

Source Section

ABISIP

MAX16K

Maximum number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute. Aggregation C display the maximum and pass through aggregation unchanged and means Max over time and Max over space.

Data Source

BSC_IQG20_APG40

Source Field

MAX16K

Source Section

NONRES64K

MAX64K

Maximum number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. Aggregation C display the maximum and pass through aggregation unchanged and means Max over time and Max over space.

Data Source

BSC_IQG20_APG40

Source Field

MAX64K

Source Section

RES64K

MIN16K

Minimum number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute. It passes through aggregation unchanged and displays the minimum. Aggregation M means minimum over time and minimum over space.

Data Source

BSC_IQG20_APG40

Source Field

MIN16K

Source Section

NONRES64K

MIN64K

Minimum number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. It passes through aggregation unchanged and displays the minimum. Aggregation M means minimum over time and minimum over space.

Data Source

BSC_IQG20_APG40

Source Field

MIN64K

Source Section

RES64K

PERLEN

Period Length

PSDISCOVL

The number of discarded PS frames DL at IP overload actions

Data Source

BSC_APG40

Source Field

PSDISCOVL

Source Section

ABISIP

TG_ID

Managed Object identity for Transceiver Group

TRASYNCCNT

TRA synchronisation faults. Incremented when a TRA synchronisation fault is reported by the BTS on one of the TS

Data Source

BSC_IQG20_APG40

Source Field

TRASYNCCNT

Source Section

MOTG

UL0025JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 0% and 25% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL0025JITBUFDEL

Source Section

ABISTG

UL100JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was more than 100% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL100JITBUFDEL

Source Section

ABISTG

UL100STNLOAD

Number of scans where the traffic load on the PGW - STN link was above 100%, UL

Data Source

BSC_APG40

Source Field

UL100STNLOAD

Source Section

ABISIP

UL2650JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 26% and 50% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL2650JITBUFDEL

Source Section

ABISTG

UL5175JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 51% and 75% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL5175JITBUFDEL

Source Section

ABISTG

UL7075STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 70% and 75%, UL

Data Source

BSC_APG40

Source Field

UL7075STNLOAD

Source Section

ABISIP

UL7600JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 76% and 100% of the jitter buffer size setting. Calculated in the PGW

Data Source

BSC_APG40

Source Field

UL7600JITBUFDEL

Source Section

ABISTG

UL7680STNLOAD

Number of scans where the traffic load on the PGW - STN link was link was between 76% and 80%, UL.

Data Source

BSC_APG40

Source Field

UL7680STNLOAD

Source Section

ABISIP

UL8185STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 81% and 85%, UL

Data Source

BSC_APG40

Source Field

UL8185STNLOAD

Source Section

ABISIP

UL8690STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 86% and 90%, UL

Data Source

BSC_APG40

Source Field

UL8690STNLOAD

Source Section

ABISIP

UL9195STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 91% and 95%, UL

Data Source

BSC_APG40

Source Field

UL9195STNLOAD

Source Section

ABISIP

UL9600STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 96% and 100%,
UL

Data Source

BSC_APG40

Source Field

UL9600STNLOAD

Source Section

ABISIP

ULDROPIBUF

Counts the number of discarded CS frames in jitter buffer, UL. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

ULDROPIBUF

Source Section

ABISTG

ULJITBUFAVDEL

Counts the average jitter buffer delay on the UL. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

ULJITBUFAVDEL

Source Section

ABISTG

Transcoder_Subpool Primitive Calculations

The following is a list of primitive calculations for the Transcoder_Subpool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transcoder_Subpool Peg Counts

The following is a list of peg counts for the Transcoder_Subpool entity.

PERLEN

Period Length

TPSUBACTR

Active Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBACTR

Source Section

TRASUBPOOL

TPSUBAVTR

Available Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBAVTR

Source Section

TRASUBPOOL

TPSUBIDLTR

Idle Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBIDLTR

Source Section

TRASUBPOOL

TRC Primitive Calculations

The following is a list of primitive calculations for the TRC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

TRC Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TRC Peg Counts

The following is a list of peg counts for the TRC entity.

ALLOCATERATP

Number of allocation attempts for Ater interface transmission devices.

Data Source

BSC_IQG20_APG40

Source Field

ALLOCATERATP

Source Section

ATERTRANS

ATERCONG

Number of failed allocation attempts due to Ater interface transmission congestion.

Data Source

BSC_IQG20_APG40

Source Field

ATERCONG

Source Section

ATERTRANS

AVATERTRCDEV

Information on the number of available Ater interface transmission devices per BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

AVATERTRCDEV

Source Section

ATERTRANS

BLATERTRCDEV

Information on the number of blocked Ater interface transmission devices per BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

BLATERTRCDEV

Source Section

ATERTRANS

BSS_RELEASE

Release

ID1_ATERTRANS

Transcoder Controller ID

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

ATERTRANS

PERLEN

Period Length

SALLOCATERATP

Total number of allocation attempts for Ater interface transmission subdevices.

Data Source

BSC_IQG20_APG40

Source Field

SALLOCATERATP

Source Section

ATERTRANS

SZATERTRCDEV

Information on the number of partly or wholly seized Ater interface transmission devices connected to a BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

SZATERTRCDEV

Source Section

ATERTRANS

SZSATERTRCDEV

Information on the number of seized Ater interface transmission subdevices connected to a BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

SZSATERTRCDEV

Source Section

ATERTRANS

TRCNSCAN

Number of accumulations (every 1/10th second).

Data Source

BSC_IQG20_APG40

Source Field

TRCNSCAN

Source Section

ATERTRANS

TRD Primitive Calculations

The following is a list of primitive calculations for the TRD entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

TRD Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TRD Peg Counts

The following is a list of peg counts for the TRD entity.

BSS_RELEASE

Release

ID1_TRAPEVENT

Transcoder Device

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

TRAPEVENT

PERLEN

Period Length

TPACC

Number of Accumulations.

Data Source

BSC_IQG20_APG40

Source Field

TPACC

Source Section

TRAPEVENT

TPACTTR

Active Transcoder Resources. Shows the number of active transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPACTTR

Source Section

TRAPEVENT

TPALLOC

Transcoder Resource Allocation Attempts.

Data Source

BSC_IQG20_APG40

Source Field

TPALLOC

Source Section

TRAPEVENT

TPAVTR

Available Transcoder Resources. Shows the number of idle and active transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPAVTR

Source Section

TRAPEVENT

TPCONG

Transcoder Resource Congestion.

Data Source

BSC_IQG20_APG40

Source Field

TPCONG

Source Section

TRAPEVENT

TPCTIME

Transcoder Resource Congestion Time.

Data Source

BSC_IQG20_APG40

Source Field

TPCTIME

Source Section

TRAPEVENT

TPIDLTR

Idle Transcoder Resources. Shows the number of idle transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPIDLTR

Source Section

TRAPEVENT

TPSYNCF

V.110 Synchronization Failure for pooled transcoder devices.

Data Source

BSC_IQG20_APG40

Source Field

TPSYNCF

Source Section

TRAPEVENT

TPTFOEST

Number of successful TFO establishment

Data Source

BSC_IQG20_APG40

Source Field

TPTFOEST

Source Section

TRAPEVENT

TPTFOESTATT

Number of TFO establishment attempts

Data Source

BSC_IQG20_APG40

Source Field

TPTFOESTATT

Source Section

TRAPEVENT

TrunkRoute Primitive Calculations

The following is a list of primitive calculations for the TrunkRoute entity.

AnswerSeizureRatio_Percentage

Answer Seizure Ratio Percentage

Calculation

```
nullValue(BANS, AGGR(MSC.MSCTrunkDest, BANSWCNT)) * 100.0 /  
nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO))
```

BanswersIncomingRoute

Number of B-answers in the incoming route

Calculation

```
NANSWERSI * 100.0 / NCALLSI
```

BanswersOutgoingRoute

Number of B-answers in the outgoing route

Calculation

$\text{NANSWERSO} * 100.0 / \text{NCALLSO}$

Circuits_Available

Available Circuits on TrunkRoute

Calculation

$\text{vsum}(\text{NDEV_TRAR}, -1.0 * (\text{nullValue}(\text{BLKDDEVS}, (\text{NSCAN_TRUNKROUTE})) / 13.0))$

Congestion%

Congested Call Attempts

Calculation

$100 * (\text{UNSUC_BIDS} / \text{NBIDS_TRAR})$

DIMENSION

Dimensioning Parameter

Calculation

$\text{WM_FCAST_DIMENSION}(\text{instance_id}, \text{TimeAndElement.tstamp})$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

GROWTH

The Growth in Erlangs per Week for Linear Regression

Calculation

$\text{WM_FCAST_GROWTH}(\text{instance_id}) * 3600 * 24 * 7$

INTERVALS

Number of 60 minute intervals covered

Calculation

$\text{PERLEN} / (1.0 * 60)$

INTERVALS_TRAR

Number of 60 minute intervals covered (from TRAR data)

Calculation

`PERLEN_TRAR / (1.0 * 60)`

NANSWERS_BW

Number of seizures that leads to a B-answer on the incoming and outgoing trunks

Calculation

`vsum(NANSWERSI, NANSWERSO)`

NCALLS_BW

Number of detected seizures by the incoming and outgoing trunks

Calculation

`vsum(NCALLSI, NCALLSO)`

NISUPATP_BW

Number of ATP received on incoming and outgoing routes

Calculation

`vsum(NISUPATPI, NISUPATPO)`

NOVERFLOW_BW

Number of congested call attempts on incoming and outgoing trunks

Calculation

`vsum(NOVERFLOWI, NOVERFLOWO)`

NRESTRICT_BW

Sum of Number of Incoming and Outgoing calls rejected due to the function restriction of accessible incoming and outgoing circuits

Calculation

`vsum(NRESTRICTO, NRESTRICTI)`

NSEMIPERC_BW

Number of semipermanent connection (Both Way)

Calculation

`vsum(NSEMIPERCI, NSEMIPERCO)`

NTRALACC_TRUNKROUTE_BW

Accumulated traffic level (Both Way)

Calculation

`vsum (NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)`

NumberOfBAnswers

Number of B-answers

Calculation

`nullValue (BANS, AGGR (MSC.MSCTrunkDest, BANSWCNT))`

NumberOfBids

Number of bids

Calculation

`nullValue (NBIDS_TRAR, vsum (NCALLSI, NCALLSO))`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

PercentageCongestion

Percentage Congestion

Calculation

`UNSUC_BIDS * 100.0 / NBIDS_TRAR`

PercentAnswerSeizeRatio

% Answer Seize Ratio

Calculation

`nullValue (BANS, AGGR (MSC.MSCTrunkDest, BANSWCNT)) * 100.0 /
nullValue (NBIDS_TRAR, vsum (NCALLSI, NCALLSO))`

PercentSuccessCalls

Successful Calls Percentage

Calculation

```
100 * vsum(nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO)), -1.0 *  
nullValue(UNSUC_BIDS, vsum(NOVERFLOWI, NOVERFLOWO))) /  
nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO))
```

Sample_Size

The number of Samples in the Regression

Calculation

```
WM_FCAST_SAMPLES(instance_id)
```

TR_Correlation

Correlation co-efficient

Calculation

```
WM_FCAST_CORRELATION(instance_id)
```

TR_Critical_Carried

TG Critical Traffic based on Carried Traffic

Calculation

```
capacityB( (int) Circuits_Available, TR_GOS )
```

TR_Critical_Offered

Route Critical Traffic based on Offered Traffic

Calculation

```
TR_Critical_Carried / ( 1.0 - TR_GOS )
```

TR_Current_Util%

Current Utilization%

Calculation

```
100 * (DIMENSION / TR_Critical_Offered)
```

TR_Est_GOS

Calculated Theoretical Grade of Service

Calculation

```
gos( (int) Circuits_Available, offTraffic( (int) Circuits_Available, 1.0 *  
TR_Traffic ))
```

TR_Est_Lost

Calculated Theoretical Lost Traffic

Calculation

```
vsum( TR_Traffic_Off, -1.0 * TR_Traffic )
```

TR_Exhaust_Date

Circuits Exhaustion Date based on Critical Traffic

Calculation

```
dateToString(stringToDate(TimeAndElement.tstamp, "%Y-%m-%d") +  
(int)(vsum(TR_Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24)), "%Y-%m-%d")
```

TR_Exhaust_Days

Number of Days until Circuits Exhausts, based on Critical Traffic

Calculation

```
vsum((int) vsum(TR_Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24), -7)
```

TR_ExtraCirt_Req

Extra Circuits Required in Route at the End of Forecast Period

Calculation

```
vsum( TR_N3Days_FCAST, -1.0 * NDEV_TRAR )
```

TR_Final_Util%

The forecast utilization at the end of the forecast period.

Calculation

```
100 * ( TR_Forecast_Value3 / TR_Critical_Offered )
```

TR_Forecast_Value1

Forecasted Value at N1 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(1))
```


TR_Forecast_Value2

Forecasted Value at N2 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(2))
```

TR_Forecast_Value3

Forecasted Value at N3 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(3))
```

TR_GOS

Dimensioned Grade of Service for TrunkRoute

Calculation

TR_N1Days_FCAST

Forecast Circuits in N1 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value1)
```

TR_N2Days_FCAST

Forecast Circuits in N2 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value2)
```

TR_N3Days_FCAST

Forecast Circuits in N3 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value3)
```

TR_PABH3

Profile Average Busy Hour for 3 highest values

Calculation

WM_FCAST_PABH(instance_id, TimeAndElement.timestamp, 3)

TR_PABH5

Profile Average Busy Hour for 5 highest values

Calculation

WM_FCAST_PABH(instance_id, TimeAndElement.timestamp, 5)

TR_Req_Ch

No of Circuits Required to carry the traffic given by Dimensioning parameter

Calculation

circuits(TR_GOS, DIMENSION)

TR_Traffic

Carried Traffic in Erlangs (BOTHWAY)

Calculation

nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /
(1.0 * nullValue(ACCTRAFCNTR, NSCAN_TRUNKROUTE))

TR_Traffic_Off

Calculated Theoretical Offered Traffic

Calculation

offTraffic((int) NDEV_TRAR, 1.0 * TR_Traffic)

TR_Traffic_OneWay

Carried Traffic in Erlangs

Calculation

nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /
(1.0 * nullValue(ACCTRAFCNTR, NSCAN_TRUNKROUTE))

TR_Util_Offered

TCH %Utilization based on Offered Traffic

Calculation

100 * (TR_Traffic_Off / (1.0 * TR_Critical_Offered))

Traffic

Calculation

```
nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /  
(1.0 * nullValue(MSC.ACCTRAFCNTR, NSCAN_TRUNKROUTE))
```

TrafficBW

Traffic on Route (Erlangs)

Calculation

```
(NTRALACCI_TRUNKROUTE + NTRALACCO_TRUNKROUTE) / (1.0 * NSCAN_TRUNKROUTE)
```

TrafficInc

Trunk traffic incoming route (E)

Calculation

```
NTRALACCI_TRUNKROUTE / (1.0 * NSCAN_TRUNKROUTE)
```

TrafficOut

Trunk traffic outgoing route (E)

Calculation

```
NTRALACCO_TRUNKROUTE / (1.0 * NSCAN_TRUNKROUTE)
```

TRAL_TRUNKROUTE_BW

Indicator of the number of seized individuals by incoming and outgoing routes.

Calculation

```
vsum(TRALI_TRUNKROUTE, TRALO_TRUNKROUTE)
```

TrunkCallAttempts

Total trunk call attempts

Calculation

```
vsum(NCALLSI, NCALLSO)
```

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

TrunkRoute Peg Counts

The following is a list of peg counts for the TrunkRoute entity.

ACCTRAFCNTR

Number of accumulations of the traffic level counter

Data Source

MSC_TRAR

Source Field

ACCTRAFCNTR

Source Section

ASC_TRAR

BANS

Number of B-answers

Data Source

MSC_TRAR

Source Field

BANS

Source Section

ASC_TRAR

BBLOL

Number of Type B-Blocked Devices

Data Source

MSC_I0G20_APG40

Source Field

BBLOL

Source Section

TRUNKROUTE

BLKDDEVS

Sum of blocked devices

Data Source

MSC_TRAR

Source Field

BLKDDEVS

Source Section

ASC_TRAR

BLOL_TRUNKROUTE

blocked individuals in the route Individuals in state BLOC, LIBL or SEAL;
 $BLOL = MBLOL + ABLOL + OBLOL$

Data Source

MSC_IQG20_APG40

Source Field

BLOL

Source Section

TRUNKROUTE

ID1_TRUNKROUTE

Global route number (I)

Data Source

MSC_IQG20_APG40

Source Field

ID1

Source Section

TRUNKROUTE

ID2_TRUNKROUTE

Global route number (O)

Data Source

MSC_IOG20_APG40

Source Field

ID2

Source Section

TRUNKROUTE

LASTCONGCNT

Number of congestions on the last available route, outgoing route

Data Source

MSC_IOG20_APG40

Source Field

LASTCONGCNT

Source Section

TRUNKROUTE

MSC_RELEASE

Release

NANSWERSI

Number of seizures that leads to a B-answer on the incoming route

Data Source

MSC_IOG20_APG40

Source Field

NANSWERSI

Source Section

TRUNKROUTE

NANSWERSO

Number of seizures that leads to a B-answer on the outgoing route

Data Source

MSC_IQG20_APG40

Source Field

NANSWERSO

Source Section

TRUNKROUTE

NBBLOCACC

Accumulated number of type B-blocked devices

Data Source

MSC_IQG20_APG40

Source Field

NBBLOCACC

Source Section

TRUNKROUTE

NBIDS_TRAR

Number of bids

Data Source

MSC_TRAR

Source Field

NBIDS

Source Section

ASC_TRAR

NBLOCACC_TRUNKROUTE

Accumulated number of blocked devices

Data Source

MSC_IOG20_APG40

Source Field

NBLOCACC

Source Section

TRUNKROUTE

NC7DSEIZ

Number of simultaneous calls

Data Source

MSC_IOG20_APG40

Source Field

NC7DSEIZ

Source Section

TRUNKROUTE

NCALLSI

Number of detected seizures by the incoming route

Data Source

MSC_IOG20_APG40

Source Field

NCALLSI

Source Section

TRUNKROUTE

NCALLSO

Number of seizure attempts by the outgoing route

Data Source

MSC_IOG20_APG40

Source Field

NCALLSO

Source Section

TRUNKROUTE

NCONGBAS

Number of congestions due to no resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGBAS

Source Section

TRUNKROUT2

NCONGTRANS

Nr of congestions due to no transmission resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGTRANS

Source Section

TRUNKROUT2

NDEV_TRAR

Number of devices

Data Source

MSC_TRAR

Source Field

NDEV

Source Section

ASC_TRAR

NDEV_TRUNKROUTE

Number of individuals in service on the route

Data Source

MSC_IQG20_APG40

Source Field

NDEV

Source Section

TRUNKROUTE

NDSEIZ

Number of simultaneous seizures of devices on bothway route

Data Source

MSC_IQG20_APG40

Source Field

NDSEIZ

Source Section

TRUNKROUTE

NISUPATPI

Number of ATP received (incoming route and affiliated outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NISUPATPI

Source Section

TRUNKROUTE

NISUPATPO

Number of ATP received (outgoing route and affiliated incoming route)

Data Source

MSC_IQG20_APG40

Source Field

NISUPATPO

Source Section

TRUNKROUTE

NOSEIZ_TRUNKROUTE

Number of outgoing seizures

Data Source

MSC_IQG20_APG40

Source Field

NOSEIZ

Source Section

TRUNKROUTE

NOVERFLOWI

Number of calls with congestion (incoming route)

Data Source

MSC_IQG20_APG40

Source Field

NOVERFLOWI

Source Section

TRUNKROUTE

NOVERFLOWO

Number of congested call attempts

Data Source

MSC_IOG20_APG40

Source Field

NOVERFLOWO

Source Section

TRUNKROUTE

NRESTRICTI

Number of incoming calls rejected

Data Source

MSC_IOG20_APG40

Source Field

NRESTRICTI

Source Section

TRUNKROUTE

NRESTRICTO

outgoing calls rejected for the route due to the function Restriction of accessible outgoing circuits

Data Source

MSC_IOG20_APG40

Source Field

NRESTRICTO

Source Section

TRUNKROUTE

NSCAN_TRUNKROUTE

Number of accumulations (scannings)

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

TRUNKROUTE

NSEMIPERCI

Number of semipermanent connection (incoming)

Data Source

MSC_IOG20_APG40

Source Field

NSEMIPERCI

Source Section

TRUNKROUTE

NSEMIPERCO

Number of semipermanent connection (outgoing)

Data Source

MSC_IOG20_APG40

Source Field

NSEMIPERCO

Source Section

TRUNKROUTE

NTRALACCI_TRUNKROUTE

Accumulated traffic level (incoming route)

Data Source

MSC_IOG20_APG40

Source Field

NTRALACCI

Source Section

TRUNKROUTE

NTRALACCO_TRUNKROUTE

Accumulated traffic level (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NTRALACCO

Source Section

TRUNKROUTE

PERLEN

Period Length

PERLEN_TRAR

Period Length (of TRAR data)

RESTRDEV CNT

Number of restricted devices (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

RESTRDEV CNT

Source Section

TRUNKROUTE

SUMTRAFLVL

Accumulated value of the number of seized devices

Data Source

MSC_TRAR

Source Field

SUMTRAFLVL

Source Section

ASC_TRAR

THROUGHRTCNT

Number of through connections to an idle B-subscriber on a route basis, outgoing route

Data Source

MSC_IQG20_APG40

Source Field

THROUGHRTCNT

Source Section

TRUNKROUTE

TRALI_TRUNKROUTE

Indicates at each moment the number of seized individuals by the incoming route.

Data Source

MSC_IQG20_APG40

Source Field

TRALI

Source Section

TRUNKROUTE

TRALO_TRUNKROUTE

Indicates at each moment the number of seized individuals by the outgoing route.

Data Source

MSC_IQG20_APG40

Source Field

TRALO

Source Section

TRUNKROUTE

TRK_TYPE

Trunk Type

Data Source

MSC_I0G20_APG40

Source Field

TRK

UNSUC_BIDS

Number of unsuccessful bids

Data Source

MSC_TRAR

Source Field

UNSUC

Source Section

ASC_TRAR

VLR Primitive Calculations

The following is a list of primitive calculations for the VLR entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

VLR Peg Counts

The following is a list of peg counts for the VLR entity.

MSC_RELEASE

Release

NACTIVSS

Number of Activate SS messages per subscriber during busy hour

Data Source

MSC_IQG20_APG40

Source Field

NACTIVSS

Source Section

VLR

NACTTRAC

Number of operations 'Activate Trace Mode' sent to the VLR

Data Source

MSC_IOG20_APG40

Source Field

NACTTRAC

Source Section

VLR

NBEGACT

Counter for number of "Begin Subscriber Activity" per VLR received

Data Source

MSC_IOG20_APG40

Source Field

NBEGACT

Source Section

VLR

NCANCEL

requests of a MAP operation "Cancel Location" sent to MSC/VLR counted per VLR. Stepped up when a request to perform the operation is sent to MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NCANCEL

Source Section

VLR

NDEACTRA

Number of operations 'Deactivate Trace Mode' sent to the VLR

Data Source

MSC_IOG20_APG40

Source Field

NDEACTRA

Source Section

VLR

NDEACTSS

Number of Deactivate SS from VLR messages per subscriber during the busy hour

Data Source

MSC_IOG20_APG40

Source Field

NDEACTSS

Source Section

VLR

NDELETE

Number of Delete Subscriber Data operations sent per VLR

Data Source

MSC_IOG20_APG40

Source Field

NDELETE

Source Section

VLR

NERASESS

Number of Erasure requests received per VLR

Data Source

MSC_IOG20_APG40

Source Field

NERASESS

Source Section

VLR

NINSERT

Number of Insert Subscriber Data operations sent per VLR

Data Source

MSC_IOG20_APG40

Source Field

NINSERT

Source Section

VLR

NINTRRSS

Number of interrogation of SS per VLR

Data Source

MSC_IOG20_APG40

Source Field

NINTRRSS

Source Section

VLR

NPROROA

requests of a MAP operation "ProvideRoamingNumber" per VLR Stepped up when the operation is invoked

Data Source

MSC_IOG20_APG40

Source Field

NPROROA

Source Section

VLR

NPRSINFO

Number of requests of the MAP operation "Provide Subscriber Info" per VLR

Data Source

MSC_IOG20_APG40

Source Field

NPRSINFO

Source Section

VLR

NPURGEMS

Total number of Purge MS messages received from certain VLR

Data Source

MSC_IOG20_APG40

Source Field

NPURGEMS

Source Section

VLR

NPUSSDAR

Number of PROC UNSTR SS-DATA OPER REC

Data Source

MSC_IOG20_APG40

Source Field

NPUSSDAR

Source Section

VLR

NPUSSRQR

Number of PROC UNSTR SS-REQ OPER REC

Data Source

MSC_IQG20_APG40

Source Field

NPUSSRQR

Source Section

VLR

NREGPASS

Number of Register Password messages from VLR per subscriber during busy hour

Data Source

MSC_IQG20_APG40

Source Field

NREGPASS

Source Section

VLR

NREGTRSS

Number of Registration requests received per VLR

Data Source

MSC_IQG20_APG40

Source Field

NREGTRSS

Source Section

VLR

NUPDLOC

Requests of Location Updating operations sent to MSC/VLR counted per VLR

Data Source

MSC_IQG20_APG40

Source Field

NUPDLOC

Source Section

VLR

NUSSDNTS

Number of NOF UNSTR SS-NOTIFY OPER SENT

Data Source

MSC_IQG20_APG40

Source Field

NUSSDNTS

Source Section

VLR

NUSSDRQS

Number of UNSTR SS-REQ OPER SENT

Data Source

MSC_IQG20_APG40

Source Field

NUSSDRQS

Source Section

VLR

NVLRSAVTOT

Number of received authentication vectors from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSAVTOT

Source Section

COPRVLRST

NVLRSCSDTOT

Number of received current security context data from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSCSDTOT

Source Section

COPRVLRST

NVLRSECDSUCC

Number of successful requests for security data from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSECDSUCC

Source Section

COPRVLRST

NVLRSECDTOT

Number of total requests for security data from VLR

Data Source

MSC_I0G20_APG40

Source Field

NVLRSECDTOT

Source Section

COPRVLRST

PERLEN

Period Length

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Source Section

CLTCHFV2

TFV2CONGSHOSUB

Number of congestion at handover, overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

TFV2CONGSHOSUB

Source Section

CLTCHFV2

TFV2CONGSSUB

Congestion counter for subcell

Data Source

BSC_IQG20_APG40

Source Field

TFV2CONGSSUB

Source Section

CLTCHFV2

TFV2FER

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IQG20_APG40

Source Field

TFV2FER

Source Section

CELLFERF

TFV2FERTF

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IOG20_APG40

Source Field

TFV2FERTF

Source Section

CELLFERF

TFV2NSCAN

Number of accumulations of traffic level counter

Data Source

BSC_IOG20_APG40

Source Field

TFV2NSCAN

Source Section

CLTCHFV2

TFV2NSCANSUB

Number of accumulations of traffic level counter for subcell

Data Source

BSC_IOG20_APG40

Source Field

TFV2NSCANSUB

Source Section

CLTCHFV2

TFV2TCONGS

TCH congestion time

Data Source

BSC_IOG20_APG40

Source Field

TFV2TCONGS

Source Section

CLTCHFV2

TFV2TCONSUB

TCH congestion time for subcell

Data Source

BSC_IOG20_APG40

Source Field

TFV2TCONSUB

Source Section

CLTCHFV2

TFV2TRALACC

Traffic level accumulator

Data Source

BSC_IOG20_APG40

Source Field

TFV2TRALACC

Source Section

CLTCHFV2

TFV2TRALSUB

TCH traffic level accumulated in subcell

Data Source

BSC_IOG20_APG40

Source Field

TFV2TRALSUB

Source Section

CLTCHFV2

TFV3CALLS

Call attempt counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3CALLS

Source Section

CLTCHFV3

TFV3CALLSSUB

Call attempt counter for subcell

Data Source

BSC_IQG20_APG40

Source Field

TFV3CALLSSUB

Source Section

CLTCHFV3

TFV3CM1DL

Time (number of frames) on TCH/F SPV3 Mode 1 downlink

Data Source

BSC_IQG20_APG40

Source Field

TFV3CM1DL

Source Section

CLTCHFV3C

TFV3CM1UL

Time (number of frames) on TCH/F SPV3 Mode 1 uplink

Data Source

BSC_IQG20_APG40

Source Field

TFV3CM1UL

Source Section

CLTCHFV3C

TFV3CM2DL

Time (number of frames) on TCH/F SPV3 Mode 2 downlink

Data Source

BSC_IQG20_APG40

Source Field

TFV3CM2DL

Source Section

CLTCHFV3C

TFV3CM2UL

Time (number of frames) on TCH/F SPV3 Mode 2 uplink

Data Source

BSC_IQG20_APG40

Source Field

TFV3CM2UL

Source Section

CLTCHFV3C

TFV3CM3DL

Time (number of frames) on TCH/F SPV3 Mode 3 downlink

Data Source

BSC_IOG20_APG40

Source Field

TFV3CM3DL

Source Section

CLTCHFV3C

TFV3CM3UL

Time (number of frames) on TCH/F SPV3 Mode 3 uplink

Data Source

BSC_IOG20_APG40

Source Field

TFV3CM3UL

Source Section

CLTCHFV3C

TFV3CM4DL

Time (number of frames) on TCH/F SPV3 Mode 4 downlink

Data Source

BSC_IOG20_APG40

Source Field

TFV3CM4DL

Source Section

CLTCHFV3C

TFV3CM4UL

Time (number of frames) on TCH/F SPV3 Mode 4 uplink

Data Source

BSC_IOG20_APG40

Source Field

TFV3CM4UL

Source Section

CLTCHFV3C

TFV3CONGSAS

Number of congestion at assignment

Data Source

BSC_IOG20_APG40

Source Field

TFV3CONGSAS

Source Section

CLTCHFV3

TFV3CONGSASSUB

Number of congestion at assignment, overlaid subcell

Data Source

BSC_IOG20_APG40

Source Field

TFV3CONGSASSUB

Source Section

CLTCHFV3

TFV3CONGSHO

Number of congestion at handover

Data Source

BSC_IOG20_APG40

Source Field

TFV3CONGSHO

Source Section

CLTCHFV3

TFV3CONGSHOSUB

Number of congestion at handover, overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

TFV3CONGSHOSUB

Source Section

CLTCHFV3

TFV3FERCM1

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3FERCM1

Source Section

CELLFERF

TFV3FERCM2

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3FERCM2

Source Section

CELLFERF

TFV3FERCM3

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3FERCM3

Source Section

CELLFERF

TFV3FERCM4

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3FERCM4

Source Section

CELLFERF

TFV3NSCAN

Number of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

TFV3NSCAN

Source Section

CLTCHFV3

TFV3TCONGS

TCH congestion time

Data Source

BSC_IOG20_APG40

Source Field

TFV3TCONGS

Source Section

CLTCHFV3

TFV3TCONSUB

TCH congestion time for subcell

Data Source

BSC_IOG20_APG40

Source Field

TFV3TCONSUB

Source Section

CLTCHFV3

TFV3TFCM1

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IOG20_APG40

Source Field

TFV3TFCM1

Source Section

CELLFERF

TFV3TFCM2

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IOG20_APG40

Source Field

TFV3TFCM2

Source Section

CELLFERF

TFV3TFCM3

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IOG20_APG40

Source Field

TFV3TFCM3

Source Section

CELLFERF

TFV3TFCM4

FR Frame Erasure Rate (FER) counter

Data Source

BSC_IOG20_APG40

Source Field

TFV3TFCM4

Source Section

CELLFERF

TFV3TRALACC

Traffic level accumulator

Data Source

BSC_IOG20_APG40

Source Field

TFV3TRALACC

Source Section

CLTCHFV3

TFV3TRALSUB

TCH traffic level accumulated in subcell

Data Source

BSC_IQG20_APG40

Source Field

TFV3TRALSUB

Source Section

CLTCHFV3

TH1DLFER

Number of FER occurrences in the range 0- FERTHR1, for codec type HR, DL.

Data Source

BSC_IQG20_APG40

Source Field

TH1DLFER

Source Section

CELLHFER

TH1DLSUBFER

Number of FER occurrences in the range 0- FERTHR1, for codec type HR, overlaid subcell DL.

Data Source

BSC_IQG20_APG40

Source Field

TH1DLSUBFER

Source Section

CELLHFER

TH1ULFER

Number of FER occurrences in the range 0- FERTHR1, for codec type HR, UL.

Data Source

BSC_IQG20_APG40

Source Field

TH1ULFER

Source Section

CELLHFER

TH1ULSUBFER

Number of FER occurrences in the range 0-FERTHR1, for codec type HR, overlaid subcell UL.

Data Source

BSC_IQG20_APG40

Source Field

TH1ULSUBFER

Source Section

CELLHFER

TH2DLFER

Number of FER occurrences in the range FERTHR1-FERTHR2, for codec type HR, DL.

Data Source

BSC_IQG20_APG40

Source Field

TH2DLFER

Source Section

CELLHFER

TH2DLSUBFER

Number of FER occurrences in the range FERTHR1-FERTHR2, for codec type HR, overlaid subcell DL.

Data Source

BSC_IQG20_APG40

Source Field

TH2DLSUBFER

Source Section

CELLHFER

TH2ULFER

Number of FER occurrences in the range FERTHR1-FERTHR2, for codec type HR, UL.

Data Source

BSC_IQG20_APG40

Source Field

TH2ULFER

Source Section

CELLHFER

TH2ULSUBFER

Number of FER occurrences in the range FERTHR1-FERTHR2, for codec type HR, overlaid subcell UL.

Data Source

BSC_IQG20_APG40

Source Field

TH2ULSUBFER

Source Section

CELLHFER

TH3DLFER

Number of FER occurrences in the range FERTHR2-FERTHR3, for codec type HR, DL.

Data Source

BSC_IQG20_APG40

Source Field

TH3DLFER

Source Section

CELLHFER

TH3DLSUBFER

Number of FER occurrences in the range FERTHR2-FERTHR3, for codec type HR, overlaid subcell DL.

Data Source

BSC_IQG20_APG40

Source Field

TH3DLSUBFER

Source Section

CELLHFER

TH3ULFER

Number of FER occurrences in the range FERTHR2-FERTHR3, for codec type HR, UL.

Data Source

BSC_IQG20_APG40

Source Field

TH3ULFER

Source Section

CELLHFER

TH3ULSUBFER

Number of FER occurrences in the range FERTHR2-FERTHR3, for codec type HR, overlaid subcell UL.

Data Source

BSC_IQG20_APG40

Source Field

TH3ULSUBFER

Source Section

CELLHFER

TH4DLFER

Number of FER occurrences in the range FERTHR3-FERTHR4, for codec type HR, DL.

Data Source

BSC_IQG20_APG40

Source Field

TH4DLFER

Source Section

CELLHFER

TH4DLSUBFER

Number of FER occurrences in the range FERTHR3-FERTHR4, for codec type HR, overlaid subcell DL.

Data Source

BSC_IQG20_APG40

Source Field

TH4DLSUBFER

Source Section

CELLHFER

TH4ULFER

Number of FER occurrences in the range FERTHR3-FERTHR4, for codec type HR, UL.

Data Source

BSC_IOG20_APG40

Source Field

TH4ULFER

Source Section

CELLHFER

TH4ULSUBFER

Number of FER occurrences in the range FERTHR3-FERTHR4, for codec type HR, overlaid subcell UL.

Data Source

BSC_IOG20_APG40

Source Field

TH4ULSUBFER

Source Section

CELLHFER

TH5DLFER

Number of FER occurrences in the range FERTHR4-96, for codec type HR, DL.

Data Source

BSC_IOG20_APG40

Source Field

TH5DLFER

Source Section

CELLHFER

TH5DLSUBFER

Number of FER occurrences in the range FERTHR4-96, for codec type HR, overlaid subcell DL.

Data Source

BSC_IQG20_APG40

Source Field

TH5DLSUBFER

Source Section

CELLHFER

TH5ULFER

Number of FER occurrences in the range FERTHR4-96, for codec type HR, UL.

Data Source

BSC_IQG20_APG40

Source Field

TH5ULFER

Source Section

CELLHFER

TH5ULSUBFER

Number of FER occurrences in the range FERTHR4-96, for codec type HR, overlaid subcell UL.

Data Source

BSC_IQG20_APG40

Source Field

TH5ULSUBFER

Source Section

CELLHFER

THCALLS

Call attempt counter

Data Source

BSC_IQG20_APG40

Source Field

THCALLS

Source Section

CELTCHH

THCALLSSUB

Call attempt counter for overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THCALLSSUB

Source Section

CELTCHH

THCASSALL

Assignment complete for all MS power classes

Data Source

BSC_IQG20_APG40

Source Field

THCASSALL

Source Section

CELTCHH

THCASSALLSUB

Assignment complete in overlaid subcell for all MS power classes.

Data Source

BSC_IQG20_APG40

Source Field

THCASSALLSUB

Source Section

CELTCHH

THCONGSAS

nr of congestion at assignment

Data Source

BSC_IQG20_APG40

Source Field

THCONGSAS

Source Section

CELTCHH

THCONGSASSUB

nr of congestion at assignment in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THCONGSASSUB

Source Section

CELTCHH

THCONGSHO

nr of congestion at handover

Data Source

BSC_IQG20_APG40

Source Field

THCONGSHO

Source Section

CELTCHH

THCONGSHOSUB

nr of congestion at handover in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THCONGSHOSUB

Source Section

CELTCHH

THDISFERBL

Dropped HR connections, FER bothlink.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERBL

Source Section

CLTCHDRH

THDISFERBLA

Dropped HR AMR connections, FER bothlink.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERBLA

Source Section

CLTCHDRAH

THDISFERBLSUB

Dropped HR connections, FER bothlink, overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERBLSUB

Source Section

CLTCHDRH

THDISFERBLSUBA

Dropped HR AMR connections, FER bothlink,

Data Source

BSC_IQG20_APG40

Source Field

THDISFERBLSUBA

Source Section

CLTCHDRAH

THDISFERDL

Dropped HR connections, FER downlink.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERDL

Source Section

CLTCHDRH

THDISFERDLA

Dropped HR AMR connections, FER downlink.

Data Source

BSC_IOG20_APG40

Source Field

THDISFERDLA

Source Section

CLTCHDRAH

THDISFERDLSUB

Dropped HR connections, FER downlink, overlaid subcell.

Data Source

BSC_IOG20_APG40

Source Field

THDISFERDLSUB

Source Section

CLTCHDRH

THDISFERDLSUBA

Dropped HR AMR connections, FER downlink, overlaid subcell.

Data Source

BSC_IOG20_APG40

Source Field

THDISFERDLSUBA

Source Section

CLTCHDRAH

THDISFERUL

Dropped HR connections, FER uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERUL

Source Section

CLTCHDRH

THDISFERULA

Dropped HR AMR connections, FER uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERULA

Source Section

CLTCHDRAH

THDISFERULSUB

Dropped HR connections, FER uplink, overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERULSUB

Source Section

CLTCHDRH

THDISFERULSUBA

Dropped HR AMR connections, FER uplink, overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

THDISFERULSUBA

Source Section

CLTCHDRAH

THDISQABL

Dropped connections at bad quality bothlink

Data Source

BSC_IQG20_APG40

Source Field

THDISQABL

Source Section

CLTCHDRH

THDISQABLA

Dropped connections at bad quality bothlink

Data Source

BSC_IQG20_APG40

Source Field

THDISQABLA

Source Section

CLTCHDRAH

THDISQABL SUB

Dropped connections at bad quality bothlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQABL SUB

Source Section

CLTCHDRH

THDISQABLSUBA

Dropped connections at bad quality bothlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQABLSUBA

Source Section

CLTCHDRAH

THDISQADL

Dropped connections at bad quality downlink

Data Source

BSC_IQG20_APG40

Source Field

THDISQADL

Source Section

CLTCHDRH

THDISQADLA

Dropped connections at bad quality downlink

Data Source

BSC_IQG20_APG40

Source Field

THDISQADLA

Source Section

CLTCHDRAH

THDISQADLSUB

Dropped connections at bad quality downlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQADLSUB

Source Section

CLTCHDRH

THDISQADLSUBA

Dropped connections at bad quality downlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQADLSUBA

Source Section

CLTCHDRAH

THDISQAUL

Dropped connections at bad quality uplink

Data Source

BSC_IQG20_APG40

Source Field

THDISQAUL

Source Section

CLTCHDRH

THDISQAULA

Dropped connections at bad quality uplink

Data Source

BSC_IQG20_APG40

Source Field

THDISQAULA

Source Section

CLTCHDRAH

THDISQAULSUB

Dropped connections at bad quality uplink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQAULSUB

Source Section

CLTCHDRH

THDISQAULSUBA

Dropped connections at bad quality uplink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISQAULSUBA

Source Section

CLTCHDRAH

THDISSBL

Dropped connections at low signal strength bothlink

Data Source

BSC_IQG20_APG40

Source Field

THDISSBL

Source Section

CLTCHDRH

THDISSBLA

Dropped connections at low signal strength bothlink

Data Source

BSC_IQG20_APG40

Source Field

THDISSBLA

Source Section

CLTCHDRAH

THDISSBLSUB

Dropped connections at low signal strength bothlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSBLSUB

Source Section

CLTCHDRH

THDISSBLSUBA

Dropped connections at low signal strength bothlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSBLSUBA

Source Section

CLTCHDRAH

THDISSDL

Dropped connections at low signal strength downlink

Data Source

BSC_IQG20_APG40

Source Field

THDISSDL

Source Section

CLTCHDRH

THDISSDLA

Dropped connections at low signal strength downlink

Data Source

BSC_IQG20_APG40

Source Field

THDISSDLA

Source Section

CLTCHDRAH

THDISSDLSUB

Dropped connections at low signal strength downlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSDLSUB

Source Section

CLTCHDRH

THDISSDLSUBA

Dropped connections at low signal strength downlink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSDLSUBA

Source Section

CLTCHDRAH

THDISSS1

Dropped connections for classmark 1 MSs at low signal strength downlink or uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISSS1

Source Section

CLTCHDRH

THDISSS2

Dropped connections for classmark 2 MSs at low signal strength downlink or uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISSS2

Source Section

CLTCHDRH

THDISSS3

Dropped connections for classmark 3 MSs at low signal strength downlink or uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISSS3

Source Section

CLTCHDRH

THDISSS4

Dropped connections for classmark 4 MSs at low signal strength downlink or uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISSS4

Source Section

CLTCHDRH

THDISSS5

Dropped connections for classmark 5 MSs at low signal strength downlink or uplink.

Data Source

BSC_IQG20_APG40

Source Field

THDISSS5

Source Section

CLTCHDRH

THDISSUL

Dropped connections at low signal strength uplink

Data Source

BSC_IQG20_APG40

Source Field

THDISSUL

Source Section

CLTCHDRH

THDISSULA

Dropped connections at low signal strength uplink

Data Source

BSC_IQG20_APG40

Source Field

THDISSULA

Source Section

CLTCHDRAH

THDISSULSUB

Dropped connections at low signal strength uplink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSULSUB

Source Section

CLTCHDRH

THDISSULSUBA

Dropped connections at low signal strength uplink in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THDISSULSUBA

Source Section

CLTCHDRAH

THDISTA

Dropped connections at excessive TA

Data Source

BSC_IQG20_APG40

Source Field

THDISTA

Source Section

CLTCHDRH

THDISTAA

Dropped connections at excessive TA

Data Source

BSC_IQG20_APG40

Source Field

THDISTAA

Source Section

CLTCHDRAH

THFERBLDIS0

FER drop calls, HR bothlink, for CHGRP0.

Data Source

BSC_IQG20_APG40

Source Field

THFERBLDIS0

Source Section

CHGRP0H

THFERDLDIS0

FER drop calls, HR downlink, for CHGRP0.

Data Source

BSC_IQG20_APG40

Source Field

THFERDLDIS0

Source Section

CHGRP0H

THFERULDIS0

FER drop calls, HR uplink, for CHGRP0.

Data Source

BSC_IQG20_APG40

Source Field

THFERULDIS0

Source Section

CHGRP0H

THMSESTB

Successful MS channel establishment on TCHs

Data Source

BSC_IQG20_APG40

Source Field

THMSESTB

Source Section

CELTCHH

THMSESTBSUB

Successful MS channel establishment on TCHs for overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THMSESTBSUB

Source Section

CELTCHH

THNCEDROP

Number of dropped connections that occur in underlaid subcell when a subscriber to subscriber connection is established. This is between the DTAP messages Connect Acknowledge and Release or Disconnect.

Data Source

BSC_IQG20_APG40

Source Field

THNCEDROP

Source Section

CELTCHH

THNCEDROPSUB

Number of dropped connections that occur in overlaid subcell when a subscriber to subscriber connection is established. This is between the DTAP messages Connect

Data Source

BSC_IQG20_APG40

Source Field

THNCEDROPSUB

Source Section

CELTCHH

THNDROP

Dropped connections due to failure.

Data Source

BSC_IQG20_APG40

Source Field

THNDROP

Source Section

CELTCHH

THNDROP0

Total dropped TCH/H connections in CHGRP0

Data Source

BSC_IQG20_APG40

Source Field

THNDROP0

Source Section

CHGRP0H

THNDROPSUB

Dropped connections in overlaid subcell due to failure.

Data Source

BSC_IQG20_APG40

Source Field

THNDROPSUB

Source Section

CELTCHH

THNRELCONG

nr of released TCH due to radio resource congestion

Data Source

BSC_IQG20_APG40

Source Field

THNRELCONG

Source Section

CELTCHH

THNRELCONGSUB

nr of released TCH due to radio resource congestion in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THNRELCONGSUB

Source Section

CELTCHH

THNSCAN

nr of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

THNSCAN

Source Section

CELTCHH

THNSCAN_SUM

nr of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

THNSCAN

Source Section

CELTCHH

THQABLDIS0

Dropped connection, bad quality both links

Data Source

BSC_IQG20_APG40

Source Field

THQABLDIS0

Source Section

CHGRP0H

THQADLDIS0

Dropped connection, bad quality downlink

Data Source

BSC_IQG20_APG40

Source Field

THQADLDIS0

Source Section

CHGRP0H

THQAULDIS0

Dropped connection, bad quality uplink

Data Source

BSC_IQG20_APG40

Source Field

THQAULDIS0

Source Section

CHGRP0H

THSAICTRALACC

Traffic level accumulator for SAIC capable MSs with channel rate HR

Data Source

BSC_APG40

Source Field

THSAICTRALACC

Source Section

CELLMSCAP

THSPV1DTMSUC

Number of successful establishment of a DTM connection in the cell, TCH/HR SPV1

Data Source

BSC_IQG20_APG40

Source Field

THSPV1DTMSUC

Source Section

CLDTMEST

THSPV3DTMSUC

Number of successful establishment of a DTM connection in the cell, TCH/HR SPV3

Data Source

BSC_IQG20_APG40

Source Field

THSPV3DTMSUC

Source Section

CLDTMEST

THSSBLDIS0

Dropped connection, low signal strength both links

Data Source

BSC_IQG20_APG40

Source Field

THSSBLDIS0

Source Section

CHGRP0H

THSSDLDIS0

Dropped connection, low signal strength downlink

Data Source

BSC_IQG20_APG40

Source Field

THSSDLDIS0

Source Section

CHGRP0H

THSSULDIS0

Dropped connection, low signal strength uplink

Data Source

BSC_IQG20_APG40

Source Field

THSSULDIS0

Source Section

CHGRP0H

THSUDLOS

Suddenly lost connections

Data Source

BSC_IQG20_APG40

Source Field

THSUDLOS

Source Section

CLTCHDRH

THSUDLOS0

Suddenly lost connection

Data Source

BSC_IQG20_APG40

Source Field

THSUDLOS0

Source Section

CHGRP0H

THSUDLOSA

Suddenly lost connections

Data Source

BSC_IQG20_APG40

Source Field

THSUDLOSA

Source Section

CLTCHDRAH

THSUDLOSSUB

Suddenly lost connections in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THSUDLOSSUB

Source Section

CLTCHDRH

THSUDLOSSUBA

Suddenly lost connections in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THSUDLOSSUBA

Source Section

CLTCHDRAH

THTADIS0

Dropped connection at excessive TA

Data Source

BSC_IQG20_APG40

Source Field

THTADIS0

Source Section

CHGRP0H

THTCONGS

TCH congestion time

Data Source

BSC_IQG20_APG40

Source Field

THTCONGS

Source Section

CELTCHH

THTCONSUB

TCH congestion time for overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THTCONSUB

Source Section

CELTCHH

THTHARDCONGS

Counts the time when all radio resources are occupied (hard congestion) and an allocation attempt is made in the underlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THTHARDCONGS

Source Section

CELTCHH

THTHARDCONSUB

Counts the time when all radio resources are occupied (hard congestion) and an allocation attempt is made in the overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THTHARDCONSUB

Source Section

CELTCHH

THTRALACC

Traffic level accumulator

Data Source

BSC_IQG20_APG40

Source Field

THTRALACC

Source Section

CELTCHH

THTRALACC_SUM

Traffic level accumulator

Data Source

BSC_IQG20_APG40

Source Field

THTRALACC

Source Section

CELTCHH

THTRALACC0

Half-rate traffic level accumulator.

Data Source

BSC_IQG20_APG40

Source Field

THTRALACC0

Source Section

CHGRP0H

THTRALSUB

TCH traffic level accumulated in overlaid subcell.

Data Source

BSC_IOG20_APG40

Source Field

THTRALSUB

Source Section

CELTCHH

THV1CALLS

Call attempt counter

Data Source

BSC_IOG20_APG40

Source Field

THV1CALLS

Source Section

CLTCHHV1

THV1CALLSSUB

Call attempt counter for overlaid subcell

Data Source

BSC_IOG20_APG40

Source Field

THV1CALLSSUB

Source Section

CLTCHHV1

THV1CONGSAS

nr of congestion at assignment

Data Source

BSC_IOG20_APG40

Source Field

THV1CONGSAS

Source Section

CLTCHHV1

THV1CONGSASSUB

nr of congestion at assignment overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THV1CONGSASSUB

Source Section

CLTCHHV1

THV1CONGSHO

nr of congestion at handover

Data Source

BSC_IQG20_APG40

Source Field

THV1CONGSHO

Source Section

CLTCHHV1

THV1CONGSHOSUB

nr of congestion at handover overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THV1CONGSHOSUB

Source Section

CLTCHHV1

THV1FER

Number of erased frames for TCH/H SPV1

Data Source

BSC_IQG20_APG40

Source Field

THV1FER

Source Section

CELLFERH

THV1FERTF

Number of transmitted frames for TCH/H SPV1

Data Source

BSC_IQG20_APG40

Source Field

THV1FERTF

Source Section

CELLFERH

THV1NSCAN

nr of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

THV1NSCAN

Source Section

CLTCHHV1

THVITCONGS

TCH congestion time

Data Source

BSC_IQG20_APG40

Source Field

THVITCONGS

Source Section

CLTCHHV1

THVITCONSUB

TCH congestion time for overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THVITCONSUB

Source Section

CLTCHHV1

THVITRALACC

Traffic level accumulator

Data Source

BSC_IQG20_APG40

Source Field

THVITRALACC

Source Section

CLTCHHV1

THVITRALACC_SUM

Traffic level accumulator

Data Source

BSC_IOG20_APG40

Source Field

THVITRALACC

Source Section

CLTCHHV1

THV1TRALSUB

TCH traffic level accumulated in overlaid subcell.

Data Source

BSC_IOG20_APG40

Source Field

THV1TRALSUB

Source Section

CLTCHHV1

THV2CALLS

Call attempt counter

Data Source

BSC_IOG20_APG40

Source Field

THV2CALLS

Source Section

CLTCHHV2

THV2CALLSSUB

Call attempt counter for overlaid subcell

Data Source

BSC_IOG20_APG40

Source Field

THV2CALLSSUB

Source Section

CLTCHHV2

THV2CONGSAS

Number of congestion at assignment (assignment or immediate assignment fails due to no idle channels are available)

Data Source

BSC_IQG20_APG40

Source Field

THV2CONGSAS

Source Section

CLTCHHV2

THV2CONGSASSUB

Number of congestion at assignment, overlaid subcell (assignment or immediate assignment fails due to no idle channels are available)

Data Source

BSC_IQG20_APG40

Source Field

THV2CONGSASSUB

Source Section

CLTCHHV2

THV2CONGSHO

Number of congestion at handover (assignment or immediate assignment fails due to no idle channels are available)

Data Source

BSC_IQG20_APG40

Source Field

THV2CONGSHO

Source Section

CLTCHHV2

THV2CONGSHOSUB

Number of congestion at handover, overlaid subcell (assignment or immediate assignment fails due to no idle channels are available)

Data Source

BSC_IQG20_APG40

Source Field

THV2CONGSHOSUB

Source Section

CLTCHHV2

THV2NSCAN

Number of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

THV2NSCAN

Source Section

CLTCHHV2

THV2TCONGS

TCH congestion time (when an allocation attempt for the required TCH channel is failed due to congestion)

Data Source

BSC_IQG20_APG40

Source Field

THV2TCONGS

Source Section

CLTCHHV2

THV2TCONSUB

TCH congestion time for overlaid subcell (when an allocation attempt for the required TCH channel is failed due to congestion)

Data Source

BSC_IQG20_APG40

Source Field

THV2TCONSUB

Source Section

CLTCHHV2

THV2TRALACC

Traffic level accumulator (Info about number of seized channels in the cell)

Data Source

BSC_IQG20_APG40

Source Field

THV2TRALACC

Source Section

CLTCHHV2

THV2TRALSUB

Traffic level accumulated in overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

THV2TRALSUB

Source Section

CLTCHHV2

THV3CALLS

Call attempt counter

Data Source

BSC_IQG20_APG40

Source Field

THV3CALLS

Source Section

CLTCHHV3

THV3CALLSSUB

Call attempt counter for subcell

Data Source

BSC_IQG20_APG40

Source Field

THV3CALLSSUB

Source Section

CLTCHHV3

THV3CM1DL

Time (number of frames) on TCH/H SPV3 Mode 1 downlink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM1DL

Source Section

CLTCHHV3C

THV3CM1UL

Time (number of frames) on TCH/H SPV3 Mode 1 uplink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM1UL

Source Section

CLTCHHV3C

THV3CM2DL

Time (number of frames) on TCH/H SPV3 Mode 2 downlink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM2DL

Source Section

CLTCHHV3C

THV3CM2UL

Time (number of frames) on TCH/H SPV3 Mode 2 uplink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM2UL

Source Section

CLTCHHV3C

THV3CM3DL

Time (number of frames) on TCH/H SPV3 Mode 3 downlink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM3DL

Source Section

CLTCHHV3C

THV3CM3UL

Time (number of frames) on TCH/H SPV3 Mode 3 uplink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM3UL

Source Section

CLTCHHV3C

THV3CM4DL

Time (number of frames) on TCH/H SPV3 Mode 4 downlink

Data Source

BSC_IQG20_APG40

Source Field

THV3CM4DL

Source Section

CLTCHHV3C

THV3CM4UL

Time (number of frames) on TCH/H SPV3 Mode 4 uplink

Data Source

BSC_IOG20_APG40

Source Field

THV3CM4UL

Source Section

CLTCHHV3C

THV3CONGSAS

Number of congestion at assignment

Data Source

BSC_IOG20_APG40

Source Field

THV3CONGSAS

Source Section

CLTCHHV3

THV3CONGSASSUB

Number of congestion at assignment, overlaid subcell

Data Source

BSC_IOG20_APG40

Source Field

THV3CONGSASSUB

Source Section

CLTCHHV3

THV3CONGSHO

Number of congestion at handover

Data Source

BSC_IOG20_APG40

Source Field

THV3CONGSHO

Source Section

CLTCHHV3

THV3CONGSHOSUB

Number of congestion at handover, overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

THV3CONGSHOSUB

Source Section

CLTCHHV3

THV3FERCM1

Number of erased frames for TCH/H SPV3 Mode 1

Data Source

BSC_IQG20_APG40

Source Field

THV3FERCM1

Source Section

CELLFERH

THV3FERCM2

Number of erased frames for TCH/H SPV3 Mode 2

Data Source

BSC_IQG20_APG40

Source Field

THV3FERCM2

Source Section

CELLFERH

THV3FERCM3

Number of erased frames for TCH/H SPV3 Mode 3

Data Source

BSC_IQG20_APG40

Source Field

THV3FERCM3

Source Section

CELLFERH

THV3FERCM4

Number of erased frames for TCH/H SPV3 Mode 4

Data Source

BSC_IQG20_APG40

Source Field

THV3FERCM4

Source Section

CELLFERH

THV3NSCAN

Number of accumulations of traffic level counter

Data Source

BSC_IQG20_APG40

Source Field

THV3NSCAN

Source Section

CLTCHHV3

THV3TCONGS

TCH congestion time

Data Source

BSC_IQG20_APG40

Source Field

THV3TCONGS

Source Section

CLTCHHV3

THV3TCONSUB

TCH congestion time for subcell

Data Source

BSC_IQG20_APG40

Source Field

THV3TCONSUB

Source Section

CLTCHHV3

THV3TFCM1

Number of transmitted frames for TCH/H SPV3 Mode 1

Data Source

BSC_IQG20_APG40

Source Field

THV3TFCM1

Source Section

CELLFERH

THV3TFCM2

Number of transmitted frames for TCH/H SPV3 Mode 2

Data Source

BSC_IOG20_APG40

Source Field

THV3TFCM2

Source Section

CELLFERH

THV3TFCM3

Number of transmitted frames for TCH/H SPV3 Mode 3

Data Source

BSC_IOG20_APG40

Source Field

THV3TFCM3

Source Section

CELLFERH

THV3TFCM4

Number of transmitted frames for TCH/H SPV3 Mode 4

Data Source

BSC_IOG20_APG40

Source Field

THV3TFCM4

Source Section

CELLFERH

THV3TRALACC

Traffic level accumulator

Data Source

BSC_IOG20_APG40

Source Field

THV3TRALACC

Source Section

CLTCHHV3

THV3TRALSUB

TCH traffic level accumulated in subcell

Data Source

BSC_IQG20_APG40

Source Field

THV3TRALSUB

Source Section

CLTCHHV3

TIME_CELLEVENT

Total Time in seconds.

Data Source

BSC_IQG20_APG40

Source Field

TIME

Source Section

CELLEVENT

TIMEHCSOUT

Accumulated time in seconds when the serving cell's channel availability is below or equal to HCSOUT.

Data Source

BSC_IQG20_APG40

Source Field

TIMEHCSOUT

Source Section

CELLHCS

TNUHCNT

Number of defined channels. The counter is set by command.

Data Source

BSC_IQG20_APG40

Source Field

TNUHCNT

Source Section

CLTCH

TNUCHSUB

Number of defined channels in overlaid subcell, set by command.

Data Source

BSC_IQG20_APG40

Source Field

TNUCHSUB

Source Section

CLTCH

TOTCLSTIME

The total time the cell is active for cell load sharing (in seconds).

Data Source

BSC_IQG20_APG40

Source Field

TOTCLSTIME

Source Section

CELEVENTH

TRAFF2BTBFSCAN

nr of TBFs mode BASIC scanned during the measurement period.

Data Source

BSC_IQG20_APG40

Source Field

TRAFF2BTBFSCAN

Source Section

TRAFGPRS2

TRAFF2ETBFSCAN

nr of TBFs mode EGPRS scanned during the measurement period.

Data Source

BSC_IQG20_APG40

Source Field

TRAFF2ETBFSCAN

Source Section

TRAFGPRS2

TRAFF2GTBFSCAN

nr of TBFs mode GPRS scanned during the measurement period.

Data Source

BSC_IQG20_APG40

Source Field

TRAFF2GTBFSCAN

Source Section

TRAFGPRS2

TRAFFDLGPRSSCAN

nr of accumulation of DL TBFs and PDCHs.

Data Source

BSC_IOG20_APG40

Source Field

TRAFFDLGPRSSCAN

Source Section

TRAFFDLGPRS

TRAFFGPRSSCAN

nr of accumulation of TBFs and PDCHs.

Data Source

BSC_IOG20_APG40

Source Field

TRAFFGPRSSCAN

Source Section

TRAFFGPRS

TRAFFULGPRSSCAN

nr of accumulation of UL TBFs and PDCHs.

Data Source

BSC_IOG20_APG40

Source Field

TRAFFULGPRSSCAN

Source Section

TRAFFULGPRS

TRAFGPRS2SCAN

Count of the total number of scans of the cell carried out for the multi-slot utilisation and number of simultaneous TBFs on the downlink

Data Source

BSC_IQG20_APG40

Source Field

TRAFGPRS2SCAN

Source Section

TRAFGPRS2

TRAFGPRS3SCAN

Total number of scans of the cell carried out for the number of UL TBFs.

Data Source

BSC_IQG20_APG40

Source Field

TRAFGPRS3SCAN

Source Section

TRAFGPRS3

TRASYNCCNT

TRA synchronisation faults. Incremented when a TRA synchronisation fault is reported by the BTS on one of the TS

Data Source

BSC_IQG20_APG40

Source Field

TRASYNCCNT

Source Section

MOTG

TSMSDWN

SMS message downlink TCH

Data Source

BSC_IQG20_APG40

Source Field

TSMSDWN

Source Section

CLSMS

TSMSUP

SMS message uplink TCH

Data Source

BSC_IQG20_APG40

Source Field

TSMSUP

Source Section

CLSMS

TSQ0ACCPT

Number of measurements with acceptable speech quality in CHGRP0

Data Source

BSC_IQG20_APG40

Source Field

TSQ0ACCPT

Source Section

CHGRP0F

TSQ0ACCPTDL

Number of measurements with acceptable speech quality.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0ACCPTDL

Source Section

CHGRP0SQI

TSQ0AFACCPT

Number of measurements with acceptable speech quality in CHGRP0 when an AMR codec is used and the channel rate is FR

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFACCPT

Source Section

CHGRP0F

TSQ0AFACCPTDL

Number of measurements with acceptable speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFACCPTDL

Source Section

CHGRP0SQI

TSQ0AFBAD

Number of measurements with unsatisfactory speech quality in CHGRP0 when an AMR codec is used and the channel rate is FR

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFBAD

Source Section

CHGRP0F

TSQ0AFBADDL

Number of measurements with unsatisfactory speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFBADDL

Source Section

CHGRP0SQI

TSQ0AFGOOD

Number of measurements with good speech quality in CHGRP0 when an AMR codec is used and the channel rate is FR

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFGOOD

Source Section

CHGRP0F

TSQ0AFGOODDL

Number of measurements with good speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AFGOODDL

Source Section

CHGRP0SQI

TSQ0AHACCPT

Number of measurements with acceptable speech quality in channel group zero when an AMR codec is used and the channel rate is HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHACCPT

Source Section

CHGRP0H

TSQ0AHACCPTDL

Number of measurements with acceptable speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHACCPTDL

Source Section

CHGRP0SQI

TSQ0AHBAD

Number of measurements with unsatisfactory speech quality in channel group zero when an AMR codec is used and the channel rate is HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHBAD

Source Section

CHGRP0H

TSQ0AHBADDL

Number of measurements with unsatisfactory speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHBADDL

Source Section

CHGRP0SQI

TSQ0AHGOOD

Number of measurements with good speech quality in channel group zero when an AMR codec is used and the channel rate is HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHGOOD

Source Section

CHGRP0H

TSQ0AHGOODDL

Number of measurements with good speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0AHGODDL

Source Section

CHGRP0SQI

TSQ0BAD

Number of measurements with unsatisfactory speech quality in CHGRP0

Data Source

BSC_IQG20_APG40

Source Field

TSQ0BAD

Source Section

CHGRP0F

TSQ0BADDL

Number of measurements with unsatisfactory speech quality.

Data Source

BSC_IQG20_APG40

Source Field

TSQ0BADDL

Source Section

CHGRP0SQI

TSQ0GOOD

Number of measurements with good speech quality in CHGRP0

Data Source

BSC_IQG20_APG40

Source Field

TSQ0GOOD

Source Section

CHGRP0F

TSQ0GOODDL

Number of measurements with good speech quality.

Data Source

BSC_I0G20_APG40

Source Field

TSQ0GOODDL

Source Section

CHGRP0SQI

TSQIACCPT

measurements with acceptable speech quality

Data Source

BSC_I0G20_APG40

Source Field

TSQIACCPT

Source Section

CELLSQI

TSQIACCPTAF

Number of measurements with acceptable speech quality when the channel rate is TCH/F and the speech version is SPV3.

Data Source

BSC_I0G20_APG40

Source Field

TSQIACCPTAF

Source Section

CELLSQI

TSQIACCPTAFDL

Number of measurements with acceptable speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTAFDL

Source Section

CELLSQIDL

TSQIACCPTAH

Number of measurements with acceptable speech quality when the channel rate is TCH/H and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTAH

Source Section

CELLSQI

TSQIACCPTAHDL

Number of measurements with acceptable speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTAHDL

Source Section

CELLSQIDL

TSQIACCPTDL

Number of measurements with acceptable speech quality.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTDL

Source Section

CELLSQIDL

TSQIACCPTSUB

Number of measurements with acceptable speech quality in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUB

Source Section

CELLSQI

TSQIACCPTSUBAF

Number of measurements with acceptable speech quality in overlaid subcell when the channel rate is TCH/F and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUBAF

Source Section

CELLSQI

TSQIACCPTSUBAFDL

Number of measurements with acceptable speech quality in overlaid subcell, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUBAFDL

Source Section

CELLSQIDL

TSQIACCPTSUBAH

Number of measurements with acceptable speech quality in overlaid subcell when the channel rate is TCH/H and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUBAH

Source Section

CELLSQI

TSQIACCPTSUBAHD

Number of measurements with acceptable speech quality in overlaid subcell, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUBAHD

Source Section

CELLSQIDL

TSQIACCPTSUBDL

Number of measurements with acceptable speech quality in overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

TSQIACCPTSUBDL

Source Section

CELLSQIDL

TSQIBAD

measurements with bad speech quality

Data Source

BSC_IQG20_APG40

Source Field

TSQIBAD

Source Section

CELLSQI

TSQIBADAF

Number of measurements with unsatisfactory speech quality when the channel rate is TCH/F and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADAF

Source Section

CELLSQI

TSQIBADAFDL

Number of measurements with unsatisfactory speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADAFDL

Source Section

CELLSQIDL

TSQIBADAH

Number of measurements with unsatisfactory speech quality when the channel rate is TCH/H and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADAH

Source Section

CELLSQI

TSQIBADAHDL

Number of measurements with unsatisfactory speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADAHDL

Source Section

CELLSQIDL

TSQIBADDL

Number of measurements with unsatisfactory speech quality.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADDL

Source Section

CELLSQIDL

TSQIBADSUB

Number of measurements with bad speech quality in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUB

Source Section

CELLSQI

TSQIBADSUBAF

Number of measurements with unsatisfactory speech quality in overlaid subcell when the channel rate is TCH/F and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUBAF

Source Section

CELLSQI

TSQIBADSUBAFDL

Number of measurements with unsatisfactory speech quality in overlaid subcell, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUBAFDL

Source Section

CELLSQIDL

TSQIBADSUBAH

Number of measurements with unsatisfactory speech quality in overlaid subcell when the channel rate is TCH/H and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUBAH

Source Section

CELLSQI

TSQIBADSUBAHD

Number of measurements with unsatisfactory speech quality in overlaid subcell, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUBAHD

Source Section

CELLSQIDL

TSQIBADSUBDL

Number of measurements with unsatisfactory speech quality in overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

TSQIBADSUBDL

Source Section

CELLSQIDL

TSQIGOOD

measurements with good speech quality

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOOD

Source Section

CELLSQI

TSQIGOODAF

Number of measurements with good speech quality when the channel rate is TCH/F and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODAF

Source Section

CELLSQI

TSQIGOODAFDL

Number of measurements with good speech quality, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODAFDL

Source Section

CELLSQIDL

TSQIGOODAH

Number of measurements with good speech quality when the channel rate is TCH/H and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODAH

Source Section

CELLSQI

TSQIGOODAHDL

Number of measurements with good speech quality, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODAHDL

Source Section

CELLSQIDL

TSQIGOODDL

Number of measurements with good speech quality.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODDL

Source Section

CELLSQIDL

TSQIGOODSUB

Number of measurements with good speech quality in overlaid subcell

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUB

Source Section

CELLSQI

TSQIGOODSUBAF

Number of measurements with good speech quality in overlaid subcell when the channel rate is TCH/F and the speech version is SPV3

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUBAF

Source Section

CELLSQI

TSQIGOODSUBAFDL

Number of measurements with good speech quality in overlaid subcell, AMR FR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUBAFDL

Source Section

CELLSQIDL

TSQIGOODSUBAH

Number of measurements with good speech quality in overlaid subcell when the channel rate is TCH/H and the speech version is SPV3.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUBAH

Source Section

CELLSQI

TSQIGOODSUBAHD

Number of measurements with good speech quality in overlaid subcell, AMR HR.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUBAHDL

Source Section

CELLSQIDL

TSQIGOODSUBDL

Number of measurements with good speech quality in overlaid subcell.

Data Source

BSC_IQG20_APG40

Source Field

TSQIGOODSUBDL

Source Section

CELLSQIDL

ULACTBPDCH

Number of B-PDCHs that carried one or more active TBFs of any mode, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTBPDCH

Source Section

TRAFULGPRS

ULACTEPDCH

Number of E-PDCHs that carried one or more active TBFs of any mode, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTEPDCH

Source Section

TRAFULGPRS

ULACTGPDC

Number of G-PDCHs that carried one or more active TBFs of any mode, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTGPDC

Source Section

TRAFULGPRS

ULACTTBFBPDCH

Sum of simultaneous active TBFs (all TBF modes) on each and every B-PDCH, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTTBFBPDCH

Source Section

TRAFULGPRS

ULACTTBFEPPDCH

Sum of simultaneous active TBFs (all TBF modes) on each and every E-PDCH, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTTBFEPPDCH

Source Section

TRAFULGPRS

ULACTTBFPDPDCH

Sum of simultaneous active TBFs (all TBF modes) on each and every G-PDCH, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULACTTBFPDPDCH

Source Section

TRAFULGPRS

ULBGEGDATA

Accumulated LLC PDU data for active EGPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGEGDATA

Source Section

CELLQOSEG

ULBGEGPFC

Accumulated nr of active PFCs for EGPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGEGPFC

Source Section

CELLQOSEG

ULBGEGTHR

Accumulated throughput per active PFC for EGPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGEGTHR

Source Section

CELLQOSEG

ULBGGDATA

Accumulated LLC PDU data for active GPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGGDATA

Source Section

CELLQOSG

ULBGGPFC

Accumulated nr of active PFCs for GPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGGPFC

Source Section

CELLQOSG

ULBGGTHR

Accumulated throughput per active PFC for GPRS, UL and QoS class Background PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULBGGTHR

Source Section

CELLQOSG

ULBPDCH

nr of B-PDCH that carried one or more UL TBF of any mode.

Data Source

BSC_IQG20_APG40

Source Field

ULBPDCH

Source Section

TRAFULGPRS

ULEPDCH

nr of E-PDCH that carried one or more UL TBF of any mode.

Data Source

BSC_IQG20_APG40

Source Field

ULEPDCH

Source Section

TRAFULGPRS

ULGMMVOL

Counts GMM/SM signalling UL

Data Source

BSC_IQG20_APG40

Source Field

ULGMMVOL

Source Section

CELLGPRS3

ULGPDCH

nr of G-PDCH that carried one or more UL TBF of any mode.

Data Source

BSC_IQG20_APG40

Source Field

ULGPDCH

Source Section

TRAFULGPRS

ULINTBGVOL

Counts Interactive & Background PFCs UL

Data Source

BSC_IQG20_APG40

Source Field

ULINTBGVOL

Source Section

CELLGPRS3

ULMSEGDATA

Accumulated LLC data volume for interactive/background, EGPRS capable MSs, UL.

Data Source

BSC_IQG20_APG40

Source Field

ULMSEGDATA

Source Section

CELLGPRS4

ULMSEGTHR

Accumulated weighted LLC throughput for interactive/background, EGPRS capable MSs, UL.

Data Source

BSC_IOG20_APG40

Source Field

ULMSEGTHR

Source Section

CELLGPRS4

ULMSGDATA

Accumulated LLC data volume for interactive/background, GPRS capable MSs, UL.

Data Source

BSC_IOG20_APG40

Source Field

ULMSGDATA

Source Section

CELLGPRS4

ULMSGTHR

Accumulated weighted LLC throughput for interactive/background, GPRS capable MSs, UL.

Data Source

BSC_IOG20_APG40

Source Field

ULMSGTHR

Source Section

CELLGPRS4

ULSAICVOL

LCC user data volume generated by SAIC capable MSs on UL. GMM/SM signalling is not included.

Data Source

BSC_IQG20_APG40

Source Field

ULSAICVOL

Source Section

CELLGPRS3

ULTBFPBPDCH

Sum of simultaneous UL TBF (all TBF modes) on each and every B-PDCH.

Data Source

BSC_IQG20_APG40

Source Field

ULTBFPBPDCH

Source Section

TRAFULGPRS

ULTBFPEPDCH

Sum of simultaneous UL TBF (all TBF modes) on each and every E-PDCH.

Data Source

BSC_IQG20_APG40

Source Field

ULTBFPEPDCH

Source Section

TRAFULGPRS

ULTBFPGPDCH

Sum of simultaneous UL TBF (all TBF modes) on each and every G-PDCH.

Data Source

BSC_IOG20_APG40

Source Field

ULTBFPGPDCH

Source Section

TRAFULGPRS

ULTHP1EGDATA

Accumulated LLC PDU data for active EGPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IOG20_APG40

Source Field

ULTHP1EGDATA

Source Section

CELLQOSEG

ULTHP1EGPFC

Accumulated nr of active PFCs for EGPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IOG20_APG40

Source Field

ULTHP1EGPFC

Source Section

CELLQOSEG

ULTHP1EGTHR

Accumulated throughput per active PFC for EGPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP1EGTHR

Source Section

CELLQOSEG

ULTHP1GDATA

Accumulated LLC PDU data for active GPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP1GDATA

Source Section

CELLQOSG

ULTHP1GPFC

Accumulated nr of active PFCs for GPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP1GPFC

Source Section

CELLQOSG

ULTHP1GTHR

Accumulated throughput per active PFC for GPRS, UL and QoS class THP1 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP1GTHR

Source Section

CELLQOSG

ULTHP2EGDATA

Accumulated LLC PDU data for active EGPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2EGDATA

Source Section

CELLQOSEG

ULTHP2EGPFC

Accumulated nr of active PFCs for EGPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2EGPFC

Source Section

CELLQOSEG

ULTHP2EGTHR

Accumulated throughput per active PFC for EGPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2EGTHR

Source Section

CELLQOSEG

ULTHP2GDATA

Accumulated LLC PDU data for active GPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2GDATA

Source Section

CELLQOSG

ULTHP2GPFC

Accumulated nr of active PFCs for GPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2GPFC

Source Section

CELLQOSG

ULTHP2GTHR

Accumulated throughput per active PFC for GPRS, UL and QoS class THP2 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP2GTHR

Source Section

CELLQOSG

ULTHP3EGDATA

Accumulated LLC PDU data for active EGPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IOG20_APG40

Source Field

ULTHP3EGDATA

Source Section

CELLQOSEG

ULTHP3EGPFC

Accumulated nr of active PFCs for EGPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IOG20_APG40

Source Field

ULTHP3EGPFC

Source Section

CELLQOSEG

ULTHP3EGTHR

Accumulated throughput per active PFC for EGPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IOG20_APG40

Source Field

ULTHP3EGTHR

Source Section

CELLQOSEG

ULTHP3GDATA

Accumulated LLC PDU data for active GPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP3GDATA

Source Section

CELLQOSG

ULTHP3GPFC

Accumulated nr of active PFCs for GPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP3GPFC

Source Section

CELLQOSG

ULTHP3GTHR

Accumulated throughput per active PFC for GPRS, UL and QoS class THP3 PFCs.

Data Source

BSC_IQG20_APG40

Source Field

ULTHP3GTHR

Source Section

CELLQOSG

USEDCLRBLKS

Number of occupied radio blocks DL

Data Source

BSC_IQG20_APG40

Source Field

USEDCLRBLKS

Source Section

CELLGPRS3

USEDULRBLKS

Number of occupied (scheduled) radio blocks UL.

Data Source

BSC_IQG20_APG40

Source Field

USEDULRBLKS

Source Section

CELLGPRS3

VOL10STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 10-19.

Data Source

BSC_IQG20_APG40

Source Field

VOL10STRACC

Source Section

CELLQOSS

VOL120STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 120-159.

Data Source

BSC_IQG20_APG40

Source Field

VOL120STRACC

Source Section

CELLQOSS

VOL160STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 160 and over.

Data Source

BSC_IQG20_APG40

Source Field

VOL160STRACC

Source Section

CELLQOSS

VOL20STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 20-29.

Data Source

BSC_IQG20_APG40

Source Field

VOL20STRACC

Source Section

CELLQOSS

VOL30STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 30-39.

Data Source

BSC_IQG20_APG40

Source Field

VOL30STRACC

Source Section

CELLQOSS

VOL40STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 40-59.

Data Source

BSC_IQG20_APG40

Source Field

VOL40STRACC

Source Section

CELLQOSS

VOL60STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 60-79.

Data Source

BSC_IQG20_APG40

Source Field

VOL60STRACC

Source Section

CELLQOSS

VOL80STRACC

The accumulated DL TBF data volume over one measurement period in the GBR interval 80-199.

Data Source

BSC_IQG20_APG40

Source Field

VOL80STRACC

Source Section

CELLQOSS

VOLULSTRACC

The accumulated UL TBF volume over one measurement period.

Data Source

BSC_IQG20_APG40

Source Field

VOLULSTRACC

Source Section

CELLQOSS

WTHR10STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 10-19.

Data Source

BSC_IQG20_APG40

Source Field

WTHR10STRACC

Source Section

CELLQOSS

WTHR120STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 120-159.

Data Source

BSC_IQG20_APG40

Source Field

WTHR120STRACC

Source Section

CELLQOSS

WTHR160STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 160 and over.

Data Source

BSC_IQG20_APG40

Source Field

WTHR160STRACC

Source Section

CELLQOSS

WTHR20STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 20-29.

Data Source

BSC_IQG20_APG40

Source Field

WTHR20STRACC

Source Section

CELLQOSS

WTHR30STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 30-39.

Data Source

BSC_IQG20_APG40

Source Field

WTHR30STRACC

Source Section

CELLQOSS

WTHR40STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 40-59.

Data Source

BSC_IQG20_APG40

Source Field

WTHR40STRACC

Source Section

CELLQOSS

WTHR60STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 60-79.

Data Source

BSC_IQG20_APG40

Source Field

WTHR60STRACC

Source Section

CELLQOSS

WTHR80STRACC

The DL TBF weighted throughput over one measurement period in the GBR interval 80-199.

Data Source

BSC_IQG20_APG40

Source Field

WTHR80STRACC

Source Section

CELLQOSS

Cellset Primitive Calculations

The following is a list of primitive calculations for the Cellset entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

MRR_RELEASE

Release

Calculation

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Cellset Peg Counts

The following is a list of peg counts for the Cellset entity.

Cell_Set_Name

Cell Set Name

Data Source

Cell Set Name

Creator

Creator

Data Source

Creator

Day_setting

Day setting example MoTuWeThFrSaSu

Data Source

Day setting

No_of_Cells

No of Cells

Data Source

No of Cells

Period__1

Period #1

Data Source

Period #1

Period__2

Period #2

Data Source

Period #2

Period__3

Period #3

Data Source

Period #3

Period__4

Period #4

Data Source

Period #4

Result_Name

Result Name

Data Source

Result Name

Result_Status

Result Status

Data Source

Result Status

Start_Time

Start Time

Data Source

Start Time

Stop_Time

Stop Time

Data Source

Stop Time

Threshold

Threshold

Data Source

Threshold

DataService_MSC Primitive Calculations

The following is a list of primitive calculations for the DataService_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DataService_MSC Peg Counts

The following is a list of peg counts for the DataService_MSC entity.

NDATATOT

Nr of req for data services id through called party Nr prefix analysis at call

Destination Primitive Calculations

The following is a list of primitive calculations for the Destination entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

Destination Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

Destination Peg Counts

The following is a list of peg counts for the Destination entity.

BANS_TRART

Number of calls that resulted in B-answer

Data Source

MSC_TRART

Source Field

BANS

Source Section

ASC_TRART

MSC_RELEASE

Release

NANSW_MBASTRAFTY

Number of calls with B-answer

Data Source

MSC_IOG20_APG40

Source Field

NANSW

Source Section

MBASTRAFTY

NCALLS_MBASTRAFTY

Number of calls

Data Source

MSC_IOG20_APG40

Source Field

NCALLS

Source Section

MBASTRAFTY

NCALLS_SSF

Number of calls to or from integrated Service Switching Function

Data Source

MSC_TRART

Source Field

NCALLS

Source Section

ASC_TRART

NCALLS_TRART

Number of attempted calls (bids)

Data Source

MSC_TRART

Source Field

NCALLS

Source Section

ASC_TRART

NCALLSDB

Number of calls to data base

Data Source

MSC_TRART

Source Field

NCALLSDB

Source Section

ASC_TRART

NCALLSEXTCONG

Count of congestion in last choice trunk group

Data Source

MSC_TRART

Source Field

NCALLSEXTCONG

Source Section

ASC_TRART

NCALLSINTCONG

Count of congestion in switching network and junctor groups

Data Source

MSC_TRART

Source Field

NCALLSINTCONG

Source Section

ASC_TRART

NCALLSSUCCEOS

Number of calls with successful End-of-selection

Data Source

MSC_TRART

Source Field

NCALLSSUCCEOS

Source Section

ASC_TRART

NCALLSUNSUC

Count of congestion in auxiliary groups,common control groups,SUS functions,intelligent network and calls lost to technical faults in the exchange

Data Source

MSC_TRART

Source Field

NCALLSUNSUC

Source Section

ASC_TRART

NECONG_MBASTRAFTY

Number of calls rejected due to external congestion

Data Source

MSC_IQG20_APG40

Source Field

NECONG

Source Section

MBASTRAFTY

NICONG_MBASTRAFTY

Number of calls rejected due to internal congestion

Data Source

MSC_IQG20_APG40

Source Field

NICONG

Source Section

MBASTRAFTY

NSCAN_MBASTRAFTY

Number of accumulations.

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

MBASTRAFTY

NSUEOS_MBASTRAFTY

Number of successful end of selections

Data Source

MSC_IQG20_APG40

Source Field

NSUEOS

Source Section

MBASTRAFTY

NTRALACC_MBASTRAFTY

Traffic Level Accumulator, Number of ongoing through connected calls

Data Source

MSC_IQG20_APG40

Source Field

NTRALACC

Source Section

MBASTRAFTY

NUNSUCCE_MBASTRAFTY

Number of unsuccessful calls

Data Source

MSC_IQG20_APG40

Source Field

NUNSUCCE

Source Section

MBASTRAFTY

PERLEN

Period Length

TRAFLVLCNTR

Accumulated value of traffic flow per origin and destination

Data Source

MSC_TRART

Source Field

TRAFLVLCNTR

Source Section

ASC_TRART

TRAL_MBASTRAFTY

Traffic Level, Number of ongoing through connected calls

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

MBASTRAFTY

DestinationCode Primitive Calculations

The following is a list of primitive calculations for the DestinationCode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

DestinationCode Peg Counts

The following is a list of peg counts for the DestinationCode entity.

MSC_RELEASE

Release

NANSW

Number of B-answers

Data Source

MSC_IQG20_APG40

Source Field

NANSW

Source Section

TRAFFDEST

NCALLS

Number of seizure attempts towards the destination

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

TRAFFDEST

NOUTGSCNT

Number of calls towards a traffic destination seizing an outgoing individual

Data Source

MSC_IOG20_APG40

Source Field

NOUTGSCNT

Source Section

TRAFFDEST1

NTDBLO

Number of calls that have been rejected due to the network management function Traffic
Destination Blocking

Data Source

MSC_IOG20_APG40

Source Field

NTDBLO

Source Section

TRAFFDEST

NUNSUCC

Number of failed calls towards a traffic destination code caused by congestion when seizing an
outgoing individual

Data Source

MSC_IOG20_APG40

Source Field

NUNSUCC

Source Section

TRAFFDEST

PERLEN

Period Length

TRAL

Number of ongoing calls (traffic level)

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

TRAFFDEST

DigitalPath_MSC Primitive Calculations

The following is a list of primitive calculations for the DigitalPath_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DigitalPath_MSC Peg Counts

The following is a list of peg counts for the DigitalPath_MSC entity.

BFF

Bit faults frequency

CSLE

Number of seconds with controlled slips

CSLER

Number of seconds with controlled slips

DF

Number of disturbances

ES

Number of errored seconds

ESR

Number of errored seconds remote end

FSBE

Number of frame synchronization bit error events

FSBER

Number of frame synchronization bit error events

G1

Number of CRC error events of type G1

G1R

Number of CRC error events of type G1

G2

Number of CRC error events of type G2

G2R

Number of CRC error events of type G2

G3

Number of CRC error events of type G3

G3R

Number of CRC error events of type G3

G4

Number of CRC error events of type G4

G4R

Number of CRC error events of type G4

G5

Number of CRC error events of type G5

G5R

Number of CRC error events of type G5

G6

Number of CRC error events of type G6

G6R

Number of CRC error events of type G6

LCVE

Number of line code violation events

LCVER

Number of line code violation events

SEFE

Number of severely errored framing events

SEFER

Number of severely errored framing events

SES

Number of severely errored seconds

SESR

Number of severely errored seconds remote end

SF

Number of slips

SMI

Nr of suspect-marked 15-minute intervals UASB and SMI are used in 32-ch PCM sys

UAS

Number of unavailable seconds

UASB

Number of unavailable seconds bi-directional, unavailable time

UASR

Number of unavailable seconds remote end

UAV

Number of unavailability events

DigPathType_BSC Primitive Calculations

The following is a list of primitive calculations for the DigPathType_BSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DigPathType_BSC Peg Counts

The following is a list of peg counts for the DigPathType_BSC entity.

BLOHP

Number of blockings made by higher order path supervision

Data Source

BSC_IQG20_APG40

Source Field

BLOHP

Source Section

DIGPATH

BLOLP

Number of blockings made by lower order path supervision

Data Source

BSC_IQG20_APG40

Source Field

BLOLP

Source Section

DIGPATH

NBLOC

Number of blockings made by the digital path supervision

Data Source

BSC_IQG20_APG40

Source Field

NBLOC

Source Section

DIGPATH

NBLOMS

Number of blockings made by the multiplex section supervision

Data Source

BSC_IQG20_APG40

Source Field

NBLOMS

Source Section

DIGPATH

NBLOSDIP

Number of blockings made by the synchronous digital path supervision

Data Source

BSC_IQG20_APG40

Source Field

NBLOSDIP

Source Section

DIGPATH

NCONHP

Number of connected higher order path objects (VC-4)

Data Source

BSC_IQG20_APG40

Source Field

NCONHP

Source Section

DIGPATH

NCONLP

Number of connected lower order path objects (VC-12)

Data Source

BSC_IQG20_APG40

Source Field

NCONLP

Source Section

DIGPATH

NCONMS

Number of connected multiplex sections (number of connected MSs for each SDIP type)

Data Source

BSC_IQG20_APG40

Source Field

NCONMS

Source Section

DIGPATH

NCONSDIP

Number of connected synchronous digital paths

Data Source

BSC_IQG20_APG40

Source Field

NCONSDIP

Source Section

DIGPATH

NDIPST

Number of connected digital paths

Data Source

BSC_IQG20_APG40

Source Field

NDIPST

Source Section

DIGPATH

NPC

Number of performed network protection switching events

Data Source

BSC_IQG20_APG40

Source Field

NPC

Source Section

DIGPATH

PERLEN

Period Length

DigPathType_MSC Primitive Calculations

The following is a list of primitive calculations for the DigPathType_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DigPathType_MSC Peg Counts

The following is a list of peg counts for the DigPathType_MSC entity.

NBLOC

Number of blockings made by digital path supervision

NDIPST

Number of connected digital paths

DirTrunk Primitive Calculations

The following is a list of primitive calculations for the DirTrunk entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

NANSWERSI_PC

Number of seizures that leads to a B-answer on the incoming trunks

Calculation

`protect(decode(TRK_TYPE, "INC", NANSWERSI, nullFloat()))`

NANSWERSO_PC

Number of seizures that leads to a B-answer on the Outgoing trunks

Calculation

`protect(decode(TRK_TYPE, "OUT", NANSWERSO, nullFloat()))`

NCALLSI_PC

Number of detected seizures by the incoming route

Calculation

```
protect (decode (TRK_TYPE, "INC", NCALLSI, nullFloat ()))
```

NCALLSO_PC

Number of detected seizures by the outgoing route

Calculation

```
protect (decode (TRK_TYPE, "OUT", NCALLSO, nullFloat ()))
```

NISUPATPI_PC

Number of ATP received (incoming route and affiliated outgoing route)

Calculation

```
protect (decode (TRK_TYPE, "INC", NISUPATPI, nullFloat ()))
```

NISUPATPO_PC

Number of ATP received (outgoing route and affiliated incoming route)

Calculation

```
protect (decode (TRK_TYPE, "OUT", NISUPATPO, nullFloat ()))
```

NOVERFLOWI_PC

Number of calls with congestion (incoming route)

Calculation

```
protect (decode (TRK_TYPE, "INC", NOVERFLOWI, nullFloat ()))
```

NOVERFLOWO_PC

Number of calls with congestion (Outgoing route)

Calculation

```
protect (decode (TRK_TYPE, "OUT", NOVERFLOWO, nullFloat ()))
```

NRESTRICTI_PC

Number of incoming calls rejected

Calculation

```
protect (decode (TRK_TYPE, "INC", NRESTRICTI, nullFloat ()))
```

NRESTRICTO_PC

outgoing calls rejected for the route due to the function Restriction of accessible outgoing circuits

Calculation

```
protect (decode (TRK_TYPE, "OUT", NRESTRICTO, nullFloat ()))
```

NSEMIPERCI_PC

Number of semiperminant connection (incoming)

Calculation

```
protect (decode (TRK_TYPE, "INC", NSEMIPERCI, nullFloat ()))
```

NSEMIPERCO_PC

Number of semiperminant connection (outgoing)

Calculation

```
protect (decode (TRK_TYPE, "OUT", NSEMIPERCO, nullFloat ()))
```

NTRALACCI_TRUNKROUTE_PC

Accumulated traffic level (incoming route)

Calculation

```
protect (decode (TRK_TYPE, "INC", NTRALACCI_TRUNKROUTE, nullFloat ()))
```

NTRALACCO_TRUNKROUTE_PC

Accumulated traffic level (outgoing route)

Calculation

```
protect (decode (TRK_TYPE, "OUT", NTRALACCO_TRUNKROUTE, nullFloat ()))
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT ()
```

NUMHOURS

of hours in Summation Data

Calculation

TRALI_TRUNKROUTE_PC

Indicates at each moment the number of seized individuals by the incoming route

Calculation

```
protect (decode (TRK_TYPE, "INC", TRALI_TRUNKROUTE, nullFloat ()))
```

TRALO_TRUNKROUTE_PC

Indicates at each moment the number of seized individuals by the outgoing route

Calculation

```
protect (decode (TRK_TYPE, "OUT", TRALO_TRUNKROUTE, nullFloat ()))
```

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

DirTrunk Peg Counts

The following is a list of peg counts for the DirTrunk entity.

BBLOL

Number of Type B-Blocked Devices

Data Source

MSC_IQG20_APG40

Source Field

BBLOL

Source Section

TRUNKROUTE

BLOL_TRUNKROUTE

blocked individuals in the route Individuals in state BLOC, LIBL or SEAL;
BLOL=MBLOL+ABLOL+OBLOL

Data Source

MSC_IQG20_APG40

Source Field

BLOL

Source Section

TRUNKROUTE

ID1_TRUNKROUTE

Global route number (I)

Data Source

MSC_IQG20_APG40

Source Field

ID1

Source Section

TRUNKROUTE

ID2_TRUNKROUTE

Global route number (O)

Data Source

MSC_IQG20_APG40

Source Field

ID2

Source Section

TRUNKROUTE

LASTCONGCNT

Number of congestions on the last available route, outgoing route

Data Source

MSC_IQG20_APG40

Source Field

LASTCONGCNT

Source Section

TRUNKROUTE

MSC_RELEASE

Release

NANSWERSI

Number of seizures that leads to a B-answer on the incoming route

Data Source

MSC_IQG20_APG40

Source Field

NANSWERSI

Source Section

TRUNKROUTE

NANSWERSO

Number of seizures that leads to a B-answer on the outgoing route

Data Source

MSC_IQG20_APG40

Source Field

NANSWERSO

Source Section

TRUNKROUTE

NBBLOCACC

Accumulated number of type B-blocked devices

Data Source

MSC_IQG20_APG40

Source Field

NBBLOCACC

Source Section

TRUNKROUTE

NBLOCACC_TRUNKROUTE

Accumulated number of blocked devices

Data Source

MSC_IOG20_APG40

Source Field

NBLOCACC

Source Section

TRUNKROUTE

NC7DSEIZ

Number of simultaneous calls

Data Source

MSC_IOG20_APG40

Source Field

NC7DSEIZ

Source Section

TRUNKROUTE

NCALLSI

Number of detected seizures by the incoming route

Data Source

MSC_IOG20_APG40

Source Field

NCALLSI

Source Section

TRUNKROUTE

NCALLSO

Number of seizure attempts by the outgoing route

Data Source

MSC_IQG20_APG40

Source Field

NCALLSO

Source Section

TRUNKROUTE

NCONGBAS

Number of congestions due to no resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGBAS

Source Section

TRUNKROUT2

NCONGTRANS

Nr of congestions due to no transmission resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGTRANS

Source Section

TRUNKROUT2

NDEV_TRUNKROUTE

Number of individuals in service on the route

Data Source

MSC_IQG20_APG40

Source Field

NDEV

Source Section

TRUNKROUTE

NDSEIZ

Number of simultaneous seizures of devices on bothway route

Data Source

MSC_IQG20_APG40

Source Field

NDSEIZ

Source Section

TRUNKROUTE

NISUPATPI

Number of ATP received (incoming route and affiliated outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NISUPATPI

Source Section

TRUNKROUTE

NISUPATPO

Number of ATP received (outgoing route and affiliated incoming route)

Data Source

MSC_IQG20_APG40

Source Field

NISUPATPO

Source Section

TRUNKROUTE

NOSEIZ_TRUNKROUTE

Number of outgoing seizures

Data Source

MSC_IQG20_APG40

Source Field

NOSEIZ

Source Section

TRUNKROUTE

NOVERFLOWI

Number of calls with congestion (incoming route)

Data Source

MSC_IQG20_APG40

Source Field

NOVERFLOWI

Source Section

TRUNKROUTE

NOVERFLOWO

Number of congested call attempts

Data Source

MSC_IQG20_APG40

Source Field

NOVERFLOWO

Source Section

TRUNKROUTE

NRESTRICTI

Number of incoming calls rejected

Data Source

MSC_IQG20_APG40

Source Field

NRESTRICTI

Source Section

TRUNKROUTE

NRESTRICTO

outgoing calls rejected for the route due to the function Restriction of accessible outgoing circuits

Data Source

MSC_IQG20_APG40

Source Field

NRESTRICTO

Source Section

TRUNKROUTE

NSCAN_TRUNKROUTE

Number of accumulations (scannings)

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

TRUNKROUTE

NSEMIPERCI

Number of semipermanent connection (incoming)

Data Source

MSC_IQG20_APQ40

Source Field

NSEMIPERCI

Source Section

TRUNKROUTE

NSEMIPERCO

Number of semipermanent connection (outgoing)

Data Source

MSC_IQG20_APQ40

Source Field

NSEMIPERCO

Source Section

TRUNKROUTE

NTRALACCI_TRUNKROUTE

Accumulated traffic level (incoming route)

Data Source

MSC_IQG20_APQ40

Source Field

NTRALACCI

Source Section

TRUNKROUTE

NTRALACCO_TRUNKROUTE

Accumulated traffic level (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NTRALACCO

Source Section

TRUNKROUTE

PERLEN

Period Length

RESTRDEVCNT

Number of restricted devices (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

RESTRDEVCNT

Source Section

TRUNKROUTE

THROUGHRTCNT

Number of through connections to an idle B-subscriber on a route basis, outgoing route

Data Source

MSC_IQG20_APG40

Source Field

THROUGHRTCNT

Source Section

TRUNKROUTE

TRALI_TRUNKROUTE

Indicates at each moment the number of seized individuals by the incoming route.

Data Source

MSC_IOG20_APG40

Source Field

TRALI

Source Section

TRUNKROUTE

TRALO_TRUNKROUTE

Indicates at each moment the number of seized individuals by the outgoing route.

Data Source

MSC_IOG20_APG40

Source Field

TRALO

Source Section

TRUNKROUTE

TRK_TYPE

Trunk Type

Data Source

MSC_IOG20_APG40

Source Field

TRK

Source Section

TRUNKROUTE

Distrib_Group_Switch Primitive Calculations

The following is a list of primitive calculations for the Distrib_Group_Switch entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

Distrib_Group_Switch ID

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Distrib_Group_Switch Peg Counts

The following is a list of peg counts for the Distrib_Group_Switch entity.

ACCPLA

Number of accumulated blocked DIGS units in plane A

Data Source

BSC_IQG20_APG40

Source Field

ACCPLA

Source Section

DIGS

ACCPLB

Number of accumulated blocked DIGS units in plane B

Data Source

BSC_IQG20_APG40

Source Field

ACCPLB

Source Section

DIGS

ACCUNIT

Number of accumulated blocked DIGS units

Data Source

BSC_IQG20_APG40

Source Field

ACCUNIT

Source Section

DIGS

BLKPLA

Number of blocked DIGS units in plane A

Data Source

BSC_IQG20_APG40

Source Field

BLKPLA

Source Section

DIGS

BLKPLB

Number of blocked DIGS units in plane B

Data Source

BSC_IQG20_APG40

Source Field

BLKPLB

Source Section

DIGS

BLKUNIT

Number of blocked DIGS units

Data Source

BSC_IQG20_APG40

Source Field

BLKUNIT

Source Section

DIGS

NSCAN

Number of accumulations

Data Source

BSC_IQG20_APG40

Source Field

NSCAN

Source Section

DIGS

NUNIT

Number of connected DIGS units

Data Source

BSC_IQG20_APG40

Source Field

NUNIT

Source Section

DIGS

PERLEN

Period Length

DTISC Primitive Calculations

The following is a list of primitive calculations for the DTISC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

DTISC Peg Counts

The following is a list of peg counts for the DTISC entity.

MSC_RELEASE

Release

NDTICMMFLT

Number of CMM requests from a DTI or DTI2 not performed successfully

Data Source

MSC_IQG20_APG40

Source Field

NDTICMMFLT

Source Section

DTISTAT

NDTICMMTOT

Number of CMM requests from a DTI or DTI2

Data Source

MSC_IQG20_APG40

Source Field

NDTICMMTOT

Source Section

DTISTAT

NDTICNGTOT

Number of data service call attempts which fail because of congestion in all priority routes, with a DTI or DTI2 connected to the highest priority route

Data Source

MSC_IQG20_APG40

Source Field

NDTICNGTOT

Source Section

DTISTAT

NDTIDDDCTOT

Number of requests sent to a DTI or DTI2 to prepare Direct Digital Data (DDD) calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIDDDCTOT

Source Section

DTISTAT

NDTIESTFLT

Number of timeouts from a DTI or DTI2 responding to requests to establish traffic channel synchronization for data service calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIESTFLT

Source Section

DTISTAT

NDTIESTTOT

Number of requests sent to a DTI or DTI2 to establish traffic channel synchronization for data service calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIESTTOT

Source Section

DTISTAT

NDTHICMCANTOT

Number of requests sent to a DTI or DTI2 to cancel prepared ICMs

Data Source

MSC_IQG20_APG40

Source Field

NDTHICMCANTOT

Source Section

DTISTAT

NDTHICMCPLFLT

Number of ICMs which a DTI or DTI2 prepared but did not complete successfully

Data Source

MSC_IQG20_APG40

Source Field

NDTHICMCPLFLT

Source Section

DTISTAT

NDTHICMCPLTOT

Number of requests sent to a DTI or DTI2 to complete prepared ICMs

Data Source

MSC_IQG20_APG40

Source Field

NDTHICMCPLTOT

Source Section

DTISTAT

NDTIICMFLT

Number of timeouts from a DTI or DTI2 responding to requests to prepare data services for ICM

Data Source

MSC_IQG20_APG40

Source Field

NDTIICMFLT

Source Section

DTISTAT

NDTIICMTOT

Number of requests to a DTI or DTI2 to prepare data services for ICM

Data Source

MSC_IQG20_APG40

Source Field

NDTIICMTOT

Source Section

DTISTAT

NDTIPREPFLT

Number of timeouts from a DTI or DTI2 responding to requests to prepare data service calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIPREPFLT

Source Section

DTISTAT

NDTIPREPTOT

Number of requests sent to a DTI or DTI2 to prepare data service calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIPREPTOT

Source Section

DTISTAT

NDTIRELTOT

Number of requests from a DTI or DTI2 to release data service calls

Data Source

MSC_IQG20_APG40

Source Field

NDTIRELTOT

Source Section

DTISTAT

NIWUANMFLT

Number of timeouts from a GIWU responding to requests to establish traffic channel synchronization for data service calls

Data Source

MSC_IQG20_APG40

Source Field

NIWUANMFLT

Source Section

GIWUSTAT

NIWUANMTOT

Number of requests sent to a GIWU to establish traffic channel synchronization for data service calls

Data Source

MSC_IQG20_APG40

Source Field

NIWUANMTOT

Source Section

GIWUSTAT

NIWUCMMFLT

Number of CMM requests from a GIWU not performed successfully

Data Source

MSC_IQG20_APG40

Source Field

NIWUCMMFLT

Source Section

GIWUSTAT

NIWUCMMTOT

Number of CMM requests from a GIWU

Data Source

MSC_IQG20_APG40

Source Field

NIWUCMMTOT

Source Section

GIWUSTAT

NIWUCNGTOT

Number of data service call attempts which fail because of congestion in all priority routes, with a GIWU connected to the highest priority route

Data Source

MSC_IQG20_APG40

Source Field

NIWUCNGTOT

Source Section

GIWUSTAT

NIWUICMCANTOT

Number of requests sent to a GIWU to cancel prepared ICMs

Data Source

MSC_IQG20_APG40

Source Field

NIWUICMCANTOT

Source Section

GIWUSTAT

NIWUICMCPLFLT

Number of ICMs which a GIWU prepared but did not complete successfully

Data Source

MSC_IQG20_APG40

Source Field

NIWUICMCPLFLT

Source Section

GIWUSTAT

NIWUICMCPLTOT

Number of requests sent to a GIWU to complete prepared ICMs

Data Source

MSC_IQG20_APG40

Source Field

NIWUICMCPLTOT

Source Section

GIWUSTAT

NIWUICMFLT

Number of timeouts from a GIWU responding to requests to prepare data services for ICM

Data Source

MSC_IQG20_APG40

Source Field

NIWUICMFLT

Source Section

GIWUSTAT

NIWUICMTOT

Number of requests to a GIWU to prepare data services for In-Call Modification (ICM)

Data Source

MSC_IQG20_APG40

Source Field

NIWUICMTOT

Source Section

GIWUSTAT

NIWUIWRFLT

Number of timeouts from a GIWU responding to requests to prepare data service calls

Data Source

MSC_IOG20_APG40

Source Field

NIWUIWRFLT

Source Section

GIWUSTAT

NIWUIWRTOT

Number of requests sent to a GIWU to prepare data service calls

Data Source

MSC_IOG20_APG40

Source Field

NIWUIWRTOT

Source Section

GIWUSTAT

NIWURELTOT

Number of requests from a GIWU to release data service calls

Data Source

MSC_IOG20_APG40

Source Field

NIWURELTOT

Source Section

GIWUSTAT

PERLEN

Period Length

ECPool Primitive Calculations

The following is a list of primitive calculations for the ECPool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

ECPool Peg Counts

The following is a list of peg counts for the ECPool entity.

ABLOCCNT

Number of automatically-blocked ECDH devices

Data Source

MSC_IOG20_APG40

Source Field

ABLOCCNT

Source Section

ECPOOL

BLOCCNT

Blocking counter

Data Source

MSC_IOG20_APG40

Source Field

BLOCCNT

Source Section

ECPOOL

CALLCNT

Call counter

Data Source

MSC_IOG20_APG40

Source Field

CALLCNT

Source Section

ECPOOL

CONGCNT

Congestion counter

Data Source

MSC_IOG20_APG40

Source Field

CONGCNT

Source Section

ECPOOL

MBLOCCNT

Number of manually-blocked ECDH devices

Data Source

MSC_IQG20_APG40

Source Field

MBLOCCNT

Source Section

ECPOOL

MSC_RELEASE

Release

NUDEVcnt

Number of devices in service counter

Data Source

MSC_IQG20_APG40

Source Field

NUDEVcnt

Source Section

ECPOOL

OBLOCCNT

Number of 'other' type of blocking for ECDH devices

Data Source

MSC_IQG20_APG40

Source Field

OBLOCCNT

Source Section

ECPOOL

PERLEN

Period Length

POOL_ID

ID

Data Source

MSC_IQG20_APG40

Source Field

POOL

Source Section

ECPOOL

TOTDEVCNT

Total devices counter

Data Source

MSC_IQG20_APG40

Source Field

TOTDEVCNT

Source Section

ECPOOL

TRALCNT

Traffic level counter

Data Source

MSC_IQG20_APG40

Source Field

TRALCNT

Source Section

ECPOOL

EM Primitive Calculations

The following is a list of primitive calculations for the EM entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$\text{PERLEN} / (1.0 * 60)$

LocalName

EM Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

EM Peg Counts

The following is a list of peg counts for the EM entity.

BSS_RELEASE

Release

ID1_EM

RP ID

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

EMGPRS

PERLEN

Period Length

RPPLOAD

PCU-RP processor load for each RP

Data Source

BSC_IQG20_APG40

Source Field

RPPLOAD

Source Section

EMGPRS

EOSCode Primitive Calculations

The following is a list of primitive calculations for the EOSCode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

EOSCode Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

EOSCode Peg Counts

The following is a list of peg counts for the EOSCode entity.

MSC_RELEASE

Release

NEVERY

Number of occurred events during call setup

Data Source

MSC_IOG20_APG40

Source Field

NEVERY

Source Section

EOS

NLAST

calls release due to indicated event

Data Source

MSC_IOG20_APG40

Source Field

NLAST

Source Section

EOS

PERLEN

Period Length

Global_Titl_Trans_Typ Primitive Calculations

The following is a list of primitive calculations for the Global_Titl_Trans_Typ entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Global_Titl_Trans_Typ Peg Counts

The following is a list of peg counts for the Global_Titl_Trans_Typ entity.

GTTPERFD

Number of GTTs performed.

Data Source

BSC_IQG20_APG40

Source Field

GTTPERFD

Source Section

SS7TT

GTTUN0NS

Number of GTTs unable to perform - Diagnostic 0: No translation for address of such nature.

Data Source

BSC_IQG20_APG40

Source Field

GTTUN0NS

Source Section

SS7TT

GTTUN1NT

Number of GTTs unable to perform- Diagnostic 1: No translation for this address.

Data Source

BSC_I0G20_APG40

Source Field

GTTUN1NT

Source Section

SS7TT

PERLEN

Period Length

Higher_Order_Path Primitive Calculations

The following is a list of primitive calculations for the Higher_Order_Path entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

Higher_Order_Path ID

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Higher_Order_Path Peg Counts

The following is a list of peg counts for the Higher_Order_Path entity.

HPFBBE

Number of background block errors higher order path far end

Data Source

BSC_IQG20_APG40

Source Field

HPFBBE

Source Section

SDIPHP

HPFES

Number of errored seconds far end Higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPFES

Source Section

SDIPHP

HPFSES

Number of severely errored seconds far end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPFSES

Source Section

SDIPHP

HPFUAS

Number of unavailable seconds far end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPFUAS

Source Section

SDIPHP

HPFUAV

Number of unavailable events far end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPFUAV

Source Section

SDIPHP

HPNBBE

Number of background block errors higher order path near end

Data Source

BSC_IQG20_APG40

Source Field

HPNBBE

Source Section

SDIPHP

HPNES

Number of errored seconds near end Higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPNES

Source Section

SDIPHP

HPNSES

Number of severely errored seconds near end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPNSES

Source Section

SDIPHP

HPNUAS

Number of unavailable seconds near end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPNUAS

Source Section

SDIPHP

HPNUAV

Number of unavailable events near end higher order path

Data Source

BSC_IQG20_APG40

Source Field

HPNUAV

Source Section

SDIPHP

PERLEN

Period Length

SMI

Flag indicating if any suspect marked intervals occurred during 24 h measurement period higher order path.

Data Source

BSC_IQG20_APG40

Source Field

SMI

Source Section

SDIPHP

HLRSubs Primitive Calculations

The following is a list of primitive calculations for the HLRSubs entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

HLRSubs Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

HLRSubs Peg Counts

The following is a list of peg counts for the HLRSubs entity.

MSC_RELEASE

Release

NHLRMSST

Registered Mobile Subscribers in a Mobile Services Switching Centre (MSC)/VLR

Data Source

MSC_IQG20_APG40

Source Field

NHLRMSST

Source Section

HLRSTAT

NHLRREGAST

Registered Attached Mobile Subscribers in an MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NHLRREGAST

Source Section

HLRSTAT

PERLEN

Period Length

ISDNESG Primitive Calculations

The following is a list of primitive calculations for the ISDNESG entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

ISDNESG Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

ISDNESG Peg Counts

The following is a list of peg counts for the ISDNESG entity.

BSUBCNT

Blocked subscribers

Data Source

MSC_IQG20_APG40

Source Field

BSUBCNT

Source Section

ISDNESG

MSC_RELEASE

Release

NSCAN

Scannings

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

ISDNESG

OSEIZCNT

Originating seizure counter

Data Source

MSC_IQG20_APG40

Source Field

OSEIZCNT

Source Section

ISDNESG

OTRALCNT

Originating traffic level counter

Data Source

MSC_IQG20_APG40

Source Field

OTRALCNT

Source Section

ISDNESG

PERLEN

Period Length

SUBCNT

Subscribers

Data Source

MSC_IQG20_APG40

Source Field

SUBCNT

Source Section

ISDNESG

TANSCNT

Terminating answer counter

Data Source

MSC_IQG20_APG40

Source Field

TANSCNT

Source Section

ISDNESG

TBUSYCNT

Terminating busy counter

Data Source

MSC_IQG20_APG40

Source Field

TBUSYCNT

Source Section

ISDNESG

TCALLCNT

Terminating call attempt counter

Data Source

MSC_IQG20_APG40

Source Field

TCALLCNT

Source Section

ISDNESG

TNUMLCNT

Terminating number of active calls

Data Source

MSC_IQG20_APG40

Source Field

TNUMLCNT

Source Section

ISDNESG

TRSERCNT

Terminating rejected due to active service

Data Source

MSC_IQG20_APG40

Source Field

TRSERCNT

Source Section

ISDNESG

TSEIZCNT

Terminating seizure counter

Data Source

MSC_IQG20_APG40

Source Field

TSEIZCNT

Source Section

ISDNESG

TTRALCNT

Terminating traffic level counter

Data Source

MSC_IQG20_APG40

Source Field

TTRALCNT

Source Section

ISDNESG

TUCACNT

Terminating end user call attempts counter

Data Source

MSC_IQG20_APG40

Source Field

TUCACNT

Source Section

ISDNESG

TUSBUCNT

Terminating user busy counter

Data Source

MSC_IQG20_APG40

Source Field

TUSBUCNT

Source Section

ISDNESG

LA Primitive Calculations

The following is a list of primitive calculations for the LA entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PL_SUCC%

Successful Page Reponse Percentage

Calculation

`vsum(NLAPAG1RESUCC, NLAPAG2RESUCC) * 100.0 / vsum(NLAPAG1LOTOT, NLAPAG2LOTOT)`

PL_TOT_1

Total Number of Page Attempts (First and Repeated Pages)

Calculation

`vsum(NLAPAG1LOTOT, NLAPAG2LOTOT)`

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

LA Peg Counts

The following is a list of peg counts for the LA entity.

MSC_RELEASE

Release

NLAL2IOTOT

Number of IMSI attached location updatings for already registered subscribers over Gs-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLAL2IOTOT

Source Section

LOCAREAST

NLAL2NOSUCC

Number of successful normal location updatings for already registered subscribers over Gs-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLAL2NOSUCC

Source Section

LOCAREAST

NLAL2OISUCC

Number of successful IMSI attached location updatings for already registered subscribers over Gs-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLAL2OISUCC

Source Section

LOCAREAST

NLAL2ONTOT

Number of normal location updatings for already registered subscribers over Gs- interface.

Data Source

MSC_IQG20_APG40

Source Field

NLAL2ONTOT

Source Section

LOCAREAST

NLALIOSUCC

Number of successful IMSI attached location updatings for already registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALIOSUCC

Source Section

LOCAREAST

NLALIOTOT

Number of IMSI attached location updatings for already registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALIOTOT

Source Section

LOCAREAST

NLALNNSUCC

Number of successful normal location updatings for non-registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALNNSUCC

Source Section

LOCAREAST

NLALNNTOT

Number of normal location updatings for non-registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALNNTOT

Source Section

LOCAREAST

NLALNOSUCC

Number of successful normal location updatings for already registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALNOSUCC

Source Section

LOCAREAST

NLALNOTOT

Number of normal location updating attempts for already registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALNOTOT

Source Section

LOCAREAST

NLALOCPRRFLT

Number of location updating rejections due to Partial Roaming.

Data Source

MSC_IOG20_APG40

Source Field

NLALOCPRRFLT

Source Section

LOCAREAST

NLALOCSSRFLT

Number of location updating rejections due to the Cellular Service Separation (CSS) restriction

Data Source

MSC_IOG20_APG40

Source Field

NLALOCSSRFLT

Source Section

LOCAREAST

NLALOCSUCC

Successful Location Updatings

Data Source

MSC_IOG20_APG40

Source Field

NLALOCSUCC

Source Section

LOCAREAST

NLALOCTOT

Total # LU attempts

Data Source

MSC_IOG20_APG40

Source Field

NLALOCTOT

Source Section

LOCAREAST

NLALPESUCC

Number of successful periodic location updatings over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALPESUCC

Source Section

LOCAREAST

NLALPETOT

Number of periodic location updatings over A and Iu-interface.

Data Source

MSC_IQG20_APG40

Source Field

NLALPETOT

Source Section

LOCAREAST

NLAPAG1LOTOT

first page attempts to a LA

Data Source

MSC_IQG20_APG40

Source Field

NLAPAG1LOTOT

Source Section

LOCAREAST

NLAPAG1RESUCC

page responses to first page to a LA

Data Source

MSC_IQG20_APG40

Source Field

NLAPAG1RESUCC

Source Section

LOCAREAST

NLAPAG2LOTOT

repeated page attempts to a LA

Data Source

MSC_IQG20_APG40

Source Field

NLAPAG2LOTOT

Source Section

LOCAREAST

NLAPAG2RESUCC

page responses to repeated page to a LA

Data Source

MSC_IQG20_APG40

Source Field

NLAPAG2RESUCC

Source Section

LOCAREAST

NLAPAGERR

Number of unsuccessful page responses (includes unexpected page responses, location area level)

Data Source

MSC_IQG20_APG40

Source Field

NLAPAGERR

Source Section

LOCAREAST

PERLEN

Period Length

LAPD Primitive Calculations

The following is a list of primitive calculations for the LAPD entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$\text{PERLEN} / (1.0 * 60)$

LocalName

LAPD Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

LAPD Peg Counts

The following is a list of peg counts for the LAPD entity.

BSS_RELEASE

Release

CBADFRAME

Number of bad frames received on a device.

Data Source

BSC_IQG20_APG40

Source Field

CBADFRAME

Source Section

LAPD

CLINKFAIL

Number of LAPD link failures.

Data Source

BSC_IQG20_APG40

Source Field

CLINKFAIL

Source Section

LAPD

COVERLOAD

Number of LAPD overloads.

Data Source

BSC_IQG20_APG40

Source Field

COVERLOAD

Source Section

LAPD

CPCOLERR

Number of LAPD protocol errors.

Data Source

BSC_IQG20_APG40

Source Field

CPCOLERR

Source Section

LAPD

CRECIFRAME

Number of received LAPD I and UI frames (divided by 10 to prevent overflow).

Data Source

BSC_IQG20_APG40

Source Field

CRECIFRAME

Source Section

LAPD

CRETRANSM

Number of retransmitted LAPD frames.

Data Source

BSC_IQG20_APG40

Source Field

CRETRANSM

Source Section

LAPD

CTRIFRAME

Number of transmitted LAPD I and UI frames (divided by 10 to prevent overflow).

Data Source

BSC_IQG20_APG40

Source Field

CTRIFRAME

Source Section

LAPD

PERLEN

Period Length

LATA Primitive Calculations

The following is a list of primitive calculations for the LATA entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

LATA Peg Counts

The following is a list of peg counts for the LATA entity.

NLTPG1SUCC

Number of page responses to first location area pages to a LATA

NLTPG1TOT

Number of first location area page attempts to a LATA

NLTPG2SUCC

Number of page responses to repeated location area pages to a LATA

NLTPG2TOT

Number of repeated location area page attempts to a LATA

NLTWPGSUCC

Number of page responses to LATA wide paging

NLTWPGTOT

Number of LATA wide page attempts to a LATA

LossRoute Primitive Calculations

The following is a list of primitive calculations for the LossRoute entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

LossRoute Peg Counts

The following is a list of peg counts for the LossRoute entity.

ABLOL_LOSSROUTE

Number of automatically (type-A) blocked devices

Data Source

MSC_IQG20_APG40

Source Field

ABLOL

Source Section

LOSSROUTE

BLOL_LOSSROUTE

Blocking device counter

Data Source

MSC_IQG20_APG40

Source Field

BLOL

Source Section

LOSSROUTE

ID1_LOSSROUTE

ID1 Global route number

Data Source

MSC_IQG20_APG40

Source Field

ID1

Source Section

LOSSROUTE

MBLOL_LOSSROUTE

Number of manually blocked devices

Data Source

MSC_IQG20_APG40

Source Field

MBLOL

Source Section

LOSSROUTE

MSC_RELEASE

Release

NABLOCACC_LOSSROUTE

Accumulated number of automatically type A blocked devices

Data Source

MSC_IQG20_APG40

Source Field

NABLOCACC

Source Section

LOSSROUTE

NANSW_LOSSROUTE

Number of answers

Data Source

MSC_IQG20_APG40

Source Field

NANSW

Source Section

LOSSROUTE

NBLOCACC_LOSSROUTE

Accumulated number of blocked devices counter

Data Source

MSC_IQG20_APG40

Source Field

NBLOCACC

Source Section

LOSSROUTE

NCALLS

Number of seizure attempts counter

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

LOSSROUTE

NDEV_LOSSROUTE

Connected device counter

Data Source

MSC_IQG20_APG40

Source Field

NDEV

Source Section

LOSSROUTE

NMBLOCACC_LOSSROUTE

Accumulated number of manually blocked devices

Data Source

MSC_IQG20_APG40

Source Field

NMBLOCACC

Source Section

LOSSROUTE

NOBLOCACC_LOSSROUTE

Accumulated number of 'other' blocked devices

Data Source

MSC_IOG20_APG40

Source Field

NOBLOCACC

Source Section

LOSSROUTE

NOVERFLOW_LOSSROUTE

Number of congested call attempts

Data Source

MSC_IOG20_APG40

Source Field

NOVERFLOW

Source Section

LOSSROUTE

NSCAN_LOSSROUTE

Number of accumulations counter

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

LOSSROUTE

NTRALACC_LOSSROUTE

Accumulated traffic level counter

Data Source

MSC_IQG20_APG40

Source Field

NTRALACC

Source Section

LOSSROUTE

OBLQ_LOSSROUTE

Number of "other" blocked devices (other than manually or automatically type A blocked devices)

Data Source

MSC_IQG20_APG40

Source Field

OBLQ

Source Section

LOSSROUTE

PERLEN

Period Length

TRAL_LOSSROUTE

Traffic level counter

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

LOSSROUTE

Lower_Order_Path Primitive Calculations

The following is a list of primitive calculations for the Lower_Order_Path entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

Lower_Order_Path ID

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Lower_Order_Path Peg Counts

The following is a list of peg counts for the Lower_Order_Path entity.

LPFBBE

Number of background block errors lower order path far end

Data Source

BSC_IQG20_APG40

Source Field

LPFBBE

Source Section

SDIPLP

LPFES

Number of errored seconds far end Lower order path

Data Source

BSC_IQG20_APG40

Source Field

LPFES

Source Section

SDIPLP

LPFSES

Number of severely errored seconds far end lower order path

Data Source

BSC_IQG20_APG40

Source Field

LPFSES

Source Section

SDIPLP

LPFUAS

Number of unavailable seconds far end lower order path

Data Source

BSC_IQG20_APG40

Source Field

LPFUAS

Source Section

SDIPLP

LPFUAV

Number of unavailable events far end lower order path

Data Source

BSC_IQG20_APG40

Source Field

LPFUAV

Source Section

SDIPLP

LPNBBE

Number of background block errors lower order path near end

Data Source

BSC_IQG20_APG40

Source Field

LPNBBE

Source Section

SDIPLP

LPNES

Number of errored seconds near end Lower order path

Data Source

BSC_IQG20_APG40

Source Field

LPNES

Source Section

SDIPLP

LPNSES

Number of severely errored seconds near end lower order path

Data Source

BSC_IOG20_APG40

Source Field

LPNSES

Source Section

SDIPLP

LPNUAS

Number of unavailable seconds near end lower order path

Data Source

BSC_IOG20_APG40

Source Field

LPNUAS

Source Section

SDIPLP

LPNUAV

Number of unavailable events near end lower order path

Data Source

BSC_IOG20_APG40

Source Field

LPNUAV

Source Section

SDIPLP

PERLEN

Period Length

SMI

Flag indicating if any suspect marked intervals occurred during 24 h measurement period lower order path

Data Source

BSC_IQG20_APG40

Source Field

SMI

Source Section

SDIPLP

MapOp Primitive Calculations

The following is a list of primitive calculations for the MapOp entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

MapOp Peg Counts

The following is a list of peg counts for the MapOp entity.

MSC_RELEASE

Release

NMAP1FLT

Number of unsuccessful MAP V2 and MAP V3 "Restore Data" operations because of local Transaction Capability Application Part (TCAP) resource problems

Data Source

MSC_IQG20_APG40

Source Field

NMAP1FLT

Source Section

MAPSIGIWRK

NMAP1SUCC

Number of successful MAP V2 and MAP V3 "Restore Data" operations

Data Source

MSC_IQG20_APG40

Source Field

NMAP1SUCC

Source Section

MAPSIGIWRK

NMAP1TOT

Number of requests for MAP V2 and MAP V3 "Restore Data" operations

Data Source

MSC_IOG20_APG40

Source Field

NMAP1TOT

Source Section

MAPSIGIWRK

NMAP1TOTST

Number of queued requests for MAP V1 and MAP V2 operations 'Reset' at a given instant

Data Source

MSC_IOG20_APG40

Source Field

NMAP1TOTST

Source Section

MAPSIGIWRK

NMAP2FLT

Number of unsuccessful MAP V2 and MAP V3 "Activate Trace Mode" operations because of local TCAP resource problems

Data Source

MSC_IOG20_APG40

Source Field

NMAP2FLT

Source Section

MAPSIGIWRK

NMAP2SUCC

Number of successful MAP V2 and MAP V3 "Activate Trace Mode" operations in connection with "Restore Data"

Data Source

MSC_IOG20_APG40

Source Field

NMAP2SUCC

Source Section

MAPSIGIWRK

NMAP2TOT

Number of requests for MAP V2 and MAP V3 "Activate Trace Mode" operations

Data Source

MSC_IOG20_APG40

Source Field

NMAP2TOT

Source Section

MAPSIGIWRK

NMAP3FLT

Number of unsuccessful MAP V2 and MAP V3 "Insert Subscriber Data" operations because of local TCAP resource problems

Data Source

MSC_IOG20_APG40

Source Field

NMAP3FLT

Source Section

MAPSIGIWRK

NMAP3SUCC

Number of successful MAP V2 and MAP V3 "Insert Subscriber Data" operations in connection with "Restore Data"

Data Source

MSC_IOG20_APG40

Source Field

NMAP3SUCC

Source Section

MAPSIGIWRK

NMAP3TOT

Number of requests for MAP V1, MAP V2, and MAP V3 "Insert Subscriber Data" operations

Data Source

MSC_IOG20_APG40

Source Field

NMAP3TOT

Source Section

MAPSIGIWRK

PERLEN

Period Length

MSC Available Data Fields

The following is a list of available data fields for the MSC entity.

C7TMFILE_MSC_AvailableDataPct

C7TMFILE_MSC Available Data Pct

STS_MSC_AvailableDataPct

STS_MSC Available Data Pct

MSC Primitive Calculations

The following is a list of primitive calculations for the MSC entity.

AnsSwitchCallsFiltered

Answered Switched Calls

Calculation

```
AGGR(TrafficType[inGroup(LocalKey, "IEX", "ORG")], NANSW)
```

CP_LOAD%

CP load on average

Calculation

```
ACCLOAD / (1.0 * NSCAN)
```

FailedIncomingInterMSCHandoverAttempts

Failed incoming inter MSC handover attempts

Calculation

```
protect(sum(NB_MSC, vsum(NNBRHINATOT, -1.0 * NNBRHINASUCC)))
```

FailedInterCellIntraMSCHandovers

Failed inter cell intra MSC Handover

Calculation

```
vsum(NHNDEBSTOT, NHNDBSSTOT, -1.0 * NHNDEBSSUCC, -1 * NHNDBSSSUCC)
```

FailedOutgoingInterMSCHandoverAttempts

Failed outgoing inter MSC Handover attempts

Calculation

```
protect(sum(NB_MSC, vsum(NNBRHBANTOT, NNBRHSNATOT, -1.0 * NNBRHBANSUCC, -  
1.0 * NNBRHSNASUCC)))
```

FailSwitchCallsFiltered

Failed Switched Calls

Calculation

```
AGGR(TrafficType[inGroup(LocalKey, "IEX", "ORG")], vsum(NUNSUCC, NECONG))
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IncominterMSCHandoverattempts

Incoming inter MSC handover attempts

Calculation

AGGR(NB_MSC, NNBRHINATOT)

IntBSCIncHOAtts

Incoming Inter-BSC Handover Attempts

Calculation

vsum(NHNDEBSTOT, NHNDBSSTOT)

IntBSCIncHOFail%

Percentage Incoming Inter-BSC Handover Failures

Calculation

nullValue(IntBSCIncHOFails * 100.0 / IntBSCIncHOAtts, 0.0)

IntBSCIncHOFails

Incoming Inter-BSC Handover Failures

Calculation

vsum(NHNDEBSTOT, NHNDBSSTOT, -1 * NHNDEBSSUCC, -1 * NHNDBSSUCC)

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

INTERVALS_TRAR

Number of 60 minute intervals covered (from TRAR data)

Calculation

PERLEN_TRAR / (1.0 * 60)

INTERVALS_TRART

Number of 60 minute intervals covered (from TRART data)

Calculation

```
PERLEN_TRART / (1.0 * 60)
```

IntMSCIncHOAtts

Incoming Inter-MSC Handover Attempts

Calculation

```
sum(bridgeList(LocalKey, System.MSC.NB_MSC, LocalKey), NNBRHINATOT)
```

IntMSCIncHOFail%

Percentage Incoming Inter-MSC Handover Failures

Calculation

```
nullValue(IntMSCIncHOFails * 100.0 / IntMSCIncHOAtts, 0.0)
```

IntMSCIncHOFails

Incoming Inter-MSC Handover Failures

Calculation

```
sum(bridgeList(LocalKey, System.MSC.NB_MSC, LocalKey), NNBRHINATOT -  
NNBRHINASUCC)
```

IntMSCOutHOAtts

Outgoing Inter-MSC Handover Attempts

Calculation

```
AGGR(NB_MSC, vsum(NNBRHBANTOT, NNBRHSNATOT))
```

IntMSCOutHOFail%

Percentage Outgoing Inter-MSC Handover Failures

Calculation

```
nullValue(IntMSCOutHOFails * 100.0 / IntMSCOutHOAtts, 0.0)
```

IntMSCOutHOFails

Outgoing Inter-MSC Handover Failures

Calculation

$\text{AGGR}(\text{NB_MSC}, \text{vsum}(\text{NNBRHBANTOT}, \text{NNBRHSNATOT}, -1 * \text{NNBRHBANSUCC}, -1 * \text{NNBRHSNASUCC}))$

LU_IMSI_AT

Ratio between IMSI attach/detach and all location updates. (When BSC parameter ATT = on)

Calculation

$\text{NLOCATTTOT} * 100.0 / \text{NLOCOLDTOT}$

LU_IMSI_DE

Ratio between IMSI detach and IMSI attach

Calculation

$\text{NLOCDETTOT} * 100.0 / \text{NLOCATTTOT}$

LU_NORM

Ratio between location updates made when an MS is changing loaction area and all location updates

Calculation

$(\text{NLOCOLDTOT} - \text{NLOCPERTOT} - \text{NLOCATTTOT}) * 100.0 / \text{NLOCOLDTOT}$

LU_NR

The rate of location update from non registered subscribers

Calculation

$\text{NLOCNRGTOT} * 100.0 / (\text{NLOCOLDTOT} + \text{NLOCNRGTOT})$

LU_NR_SUC

The success rate for location updates made by subscribers not registered in VLR

Calculation

$\text{NLOCNRGSUCC} * 100.0 / \text{NLOCNRGTOT}$

LU_PERIOD

Ratio between periodic registrations and all location updates

Calculation

$\text{NLOCPERTOT} * 100.0 / \text{NLOCOLDTOT}$

LU_R

The rate of location update from registered subscribers

Calculation

$$\text{NLOCOLDTOT} * 100.0 / (\text{NLOCOLDTOT} + \text{NLOCNRGTOT})$$

LU_R_SUC

The success rate for location updates made by subscribers already registered in VLR

Calculation

$$\text{NLOCOLDSUCC} * 100.0 / \text{NLOCOLDTOT}$$

LU_SUC

The percentage rate of location update success registered and non registered subscribers

Calculation

$$\text{vsum}(\text{NLOCOLDSUCC}, \text{NLOCNRGSUCC}) * 100.0 / \text{vsum}((1.0 * \text{NLOCOLDTOT}), \text{NLOCNRGTOT})$$

LU_TOT

Number of location update attempts

Calculation

$$\text{NLOCOLDTOT} + \text{NLOCNRGTOT}$$

MobileTerminatingFailedCalls

Mobile Terminating Failed Calls

Calculation

$$\text{vsum}(\text{NCHATOMTOT}, -1.0 * \text{NCHATOMSUCC})$$

MobilOriginatingFailedCalls

Mobil Originating Failed Calls

Calculation

$$\text{vsum}(\text{NCHAFRMTOT}, -1.0 * \text{NCHAFRMSUCC})$$

MocMtcSetupSuccessRate

Call setup success. Successful TCH Assignments of Tot Nr of Assignment Attempts %

Calculation

$$(\text{NCHAFRMSUCC} + \text{NCHATOMSUCC}) * 100.0 / (\text{NCHAFRMTOT} + \text{NCHATOMTOT})$$

MocMtcSetupSuccessRate_UMTS

UMTS Call setup success. Successful TCH Assignments of Tot Nr of Assignment Attempts %

Calculation

$$(NMSFRMSCCI + NMSTOMSCCO) * 100.0 / (NMSFRMTOTI + NMSTOMTOTO)$$

MocMtcSetupSuccessRateUMTS

RAB assignment success rate % (includes both MOC and MTC)

Calculation

$$(NMSFRMSCCI + NMSTOMSCCO) * 100.0 / (NMSFRMTOTI + NMSTOMTOTO)$$

MocSetupRatio

Mobile Originating traffic %

Calculation

$$NCHAFRMTOT * 100.0 / (NCHAFRMTOT + NCHATOMTOT)$$

MocSetupRatio_UMTS

UMTS Mobile Originating traffic %

Calculation

$$NMSFRMTOTI * 100.0 / (NMSFRMTOTI + NMSTOMTOTO)$$

MocSetupRatioUMTS

Mobile Originated Traffic in % of total traffic.

Calculation

$$NMSFRMTOTI * 100.0 / (NMSFRMTOTI + NMSTOMTOTO)$$

MocSetupSuccessRate

MOC setup success. Successful originating MSC channel assignments %

Calculation

$$NCHAFRMSUCC * 100.0 / NCHAFRMTOT$$

MocSetupSuccessRate_UMTS

UMTS MOC setup success. Successful originating MSC channel assignments %

Calculation

$$NMSFRMSCCI * 100.0 / NMSFRMTOTI$$

MocSetupSuccessRateUMTS

RAB assignment success rate % for Mobile Originated Call (MOC)

Calculation

$$\text{NMSFRMSCCI} * 100.0 / \text{NMSFRMTOTI}$$

MtcSetupRatio

Mobile Terminating traffic %

Calculation

$$\text{NCHATOMTOT} * 100.0 / (\text{NCHAFRMTOT} + \text{NCHATOMTOT})$$

MtcSetupRatio_UMTS

UMTS Mobile Terminating traffic %

Calculation

$$\text{NMSTOMTOTO} * 100.0 / (\text{NMSFRMTOTI} + \text{NMSTOMTOTO})$$

MtcSetupRatioUMTS

Mobile Originated Traffic in % of total traffic.

Calculation

$$\text{NMSTOMTOTO} * 100.0 / (\text{NMSFRMTOTI} + \text{NMSTOMTOTO})$$

MtcSetupSuccessRate

MTC setup success. Successful terminating MSC channel assignments %

Calculation

$$\text{NCHATOMSUC} * 100.0 / \text{NCHATOMTOT}$$

MtcSetupSuccessRate_UMTS

UMTS MTC setup success. Successful terminating MSC channel assignments %

Calculation

$$\text{NMSTOMSCCO} * 100.0 / \text{NMSTOMTOTO}$$

MtcSetupSuccessRateUMTS

RAB assignment success rate % for Mobile Terminated Call (MTC)

Calculation

$$\text{NMSTOMSCCO} * 100.0 / \text{NMSTOMTOTO}$$

NANSWERS_BW

Number of seizures that leads to a B-answer on the incoming and outgoing trunks

Calculation

`AGGR(TrunkRoute, NANSWERS_BW) / 2.0`

NCALLS_BW

Number of detected seizures by the incoming and outgoing trunks

Calculation

`AGGR(TrunkRoute, NCALLS_BW) / 2.0`

NHLRMSST_AVG

Subscriber in VLR

Calculation

`sum(HLRSubs, NHLRMSST)`

NHLRMSST_MAX

Subscriber in VLR

Calculation

`sum(HLRSubs, NHLRMSST)`

NISUPATP_BW

Number of ATP received on incoming and outgoing routes

Calculation

`AGGR(TrunkRoute, NISUPATP_BW) / 2.0`

NOVERFLOW_BW

Number of congested call attempts on incoming and outgoing trunks

Calculation

`AGGR(TrunkRoute, NOVERFLOW_BW) / 2.0`

NRESTRICT_BW

Sum of Number of Incoming and Outgoing calls rejected due to the function restriction of accessible incoming and outgoing circuits

Calculation

`AGGR(TrunkRoute, NRESTRICT_BW) / 2.0`

NSEMIPERC_BW

Number of semipermanent connection (Both Way)

Calculation

`AGGR(TrunkRoute, NSEMIPERC_BW) / 2.0`

NTRALACC_TRUNKROUTE_BW

Accumulated traffic level (Both Way)

Calculation

`AGGR(TrunkRoute, NTRALACC_TRUNKROUTE_BW) / 2.0`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

OutgoingInterMSCHandoverAttempts

Outgoing inter MSC Handover attempts

Calculation

`protect(sum(NB_MSC, vsum(NNBRHBANTOT, NNBRHSNATOT)))`

PercAnsSwitchCallsFiltered

Percentage Answered Switched Calls

Calculation

`100 * AGGR(TrafficType[inGroup(LocalKey, "IEX", "ORG")], (NANSW / (1.0 * vsum(NCALLS, -1.0 * NICONG))))`

PercFailCallsFiltered

Percentage Failed Calls on an MSC

Calculation

$100 * \text{AGGR}(\text{TrafficType}[\text{inGroup}(\text{LocalKey}, \text{"IEX"}, \text{"ORG"})], (\text{vsum}(\text{NUNSUCC}, \text{NICONG}, \text{NECONG}) / (1.0 * \text{NCALLS})))$

PercFailSwitchCallsFiltered

Percentage Failed Switched Calls

Calculation

$100 * \text{AGGR}(\text{TrafficType}[\text{inGroup}(\text{LocalKey}, \text{"IEX"}, \text{"ORG"})], (\text{vsum}(\text{NUNSUCC}, \text{NECONG}) / (1.0 * \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))))$

SMS_MO_SUC

Successful Transfer of Mobile Originated SMSs

Calculation

$\text{NSMSCAOSUCC} * 100.0 / \text{NSMSCDOTOT}$

SMS_MOSENT

Number of Mobile Originated Requests for SMS Delivery towards SC

Calculation

$\text{NSMSCDOTOT} * 100.0 / \text{NSMSRDOTOT}$

SMS_MT_SUC

Successful SMS deliveries towards MSs of Total Number of Sent SMSs towards MSs

Calculation

$\text{NSMSCMRSUCC} * 100.0 / \text{NSMSCMTOT}$

SMS_MTSENT

Number of SMS-GMSC Requests for SMS delivery towards MSs

Calculation

$\text{NSMSCMTOT} * 100.0 / \text{NSMSSMRLTOT}$

SMS_Successful

Number of successful SMS Total

Calculation

$(\text{NSMSCAOSUCC} + \text{NSMSSRSUCC}) * 100.0 / (\text{NSMSCMTOT} + \text{NSMSCDOTOT})$

SRNCDroppedCallRate

Dropped Call (%)

Calculation

$$\text{NRELRELEERR} * 100.0 / \text{NRELRNCTOT}$$

SRNCRelocationSuccessRate

SRNC Relocation Success (%)

Calculation

$$\text{NRELRNCSUCC} * 100.0 / \text{NRELRNCTOT}$$

SRNCRelocSucSigChanRate

SRNC Relocation Success on Signalling Channel %

Calculation

$$\text{NRELSDHSUCC} * 100.0 / \text{NRELSDHTOT}$$

SRNCSwitchBackRate

Switch Back (%)

Calculation

$$\text{NRELATTSUCC} * 100.0 / \text{NRELRNCTOT}$$

SuccessfulInterCellIntraMSCHandovers

Successful inter cell intra MSC Handover

Calculation

$$\text{vsum}(\text{NHNDIBSSUCC}, \text{NHNDIBSSUCC})$$

SwitchCallsFiltered

Switched Calls

Calculation

$$\text{AGGR}(\text{TrafficType}[\text{inGroup}(\text{LocalKey}, \text{"IEX"}, \text{"ORG"})], \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))$$

SwitchedAttmptFiltered

Switched Attempt

Calculation

$$\text{AGGR}(\text{TrafficType}[\text{inGroup}(\text{LocalKey}, \text{"IEX"}, \text{"ORG"})], \text{NCALLS})$$

SwitchTraffFiltered

Switched Traffic

Calculation

```
sum(TrafficType[inGroup(LocalKey, "IEX", "ORG")], SwitchedTraffic)
```

TotalGlobalPages

Total Global Pages on an MSC

Calculation

```
vsum(NPAG1GLTOT, NPAG2GLTOT)
```

TotalInterSwitchTraffic

Total Inter Switch Traffic

Calculation

```
protect(sum(TrunkRoute[(subString(LocalKey,0,1) == "M")], SUMTRAFLVL) /  
(1.0 * ACCTRAFCNTR))
```

TotalLADirectedPages

Total LA Directed Pages on an MSC

Calculation

```
vsum(NPAG1LOTOT, NPAG2LOTOT)
```

TotalPOITraffic

Total POI Traffic

Calculation

```
protect(sum(TrunkRoute[inGroup(subString(LocalKey,0,2), "PH", "BO", "OL",  
"KO", "RD", "AL", "TG") ], SUMTRAFLVL) / (1.0 * ACCTRAFCNTR))
```

TotalSwitchedTraffic

Total Switched Traffic on an MSC

Calculation

```
sum(TrafficType[inGroup(LocalKey, "IEX", "ORG")], SwitchedTraffic)
```

TRAL_TRUNKROUTE_BW

Indicator of the number of seized individuals by incoming and outgoing routes.

Calculation

AGGR(TrunkRoute, TRAL_TRUNKROUTE_BW) / 2.0

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC Peg Counts

The following is a list of peg counts for the MSC entity.

ABLOL_MSC

Number of RP's in blocking state, aut. blocked.

Data Source

MSC_IQG20_APG40

Source Field

ABLOL

Source Section

RP

ACCBLKCNT

Number of accumulations of the blocking level counter

Data Source

MSC_TRAR

Source Field

ACCBLKCNT

Source Section

ASC_TRAR

ACCLOAD

Accumulated Processor Load in percent

Data Source

MSC_IQG20_APG40

Source Field

ACCLOAD

Source Section

LOAS

ACCTRAFCNTR

Number of accumulations of the traffic level counter

Data Source

MSC_TRAR

Source Field

ACCTRAFCNTR

Source Section

ASC_TRAR

BLOCLCM

Number of blocked CLMs (blocking level).

Data Source

MSC_IQG20_APG40

Source Field

BLOCLCM

Source Section

GRPSWITCH

BLOLEMUX

Number of blocked EMUXs (blocking level) in both planes.

Data Source

MSC_IQG20_APG40

Source Field

BLOLEMUX

Source Section

GRPSWITCH

BLOLEMUXA

Number of blocked EMUXs (blocking level) in the A plane.

Data Source

MSC_IQG20_APG40

Source Field

BLOLEMUXA

Source Section

GRPSWITCH

BLOLEMUXB

Number of blocked EMUXs (blocking level) in the B plane.

Data Source

MSC_IQG20_APG40

Source Field

BLOLEMUXB

Source Section

GRPSWITCH

BLOLSPM

Number of blocked SPMs (blocking level) in both planes.

Data Source

MSC_IQG20_APG40

Source Field

BLOLSPM

Source Section

GRPSWITCH

BLOLSPMA

Number of blocked SPMs (blocking level) in the A-plane.

Data Source

MSC_IQG20_APG40

Source Field

BLOLSPMA

Source Section

GRPSWITCH

BLOLSPMB

Number of blocked SPMs (blocking level) in the B-plane.

Data Source

MSC_IQG20_APG40

Source Field

BLOLSPMB

Source Section

GRPSWITCH

BLOLTSM

Number of blocked TSMs (blocking level) in both planes.

Data Source

MSC_IQG20_APG40

Source Field

BLOLTSM

Source Section

GRPSWITCH

BLOLTSMA

Number of blocked TSMs (blocking level) in the A-plane.

Data Source

MSC_IOG20_APG40

Source Field

BLOLTSMA

Source Section

GRPSWITCH

BLOLTSMB

Number of blocked TSMs (blocking level) in the B-plane.

Data Source

MSC_IOG20_APG40

Source Field

BLOLTSMB

Source Section

GRPSWITCH

CALLATT

Number of call seizure attempts. This counter is never decremented

Data Source

MSC_IOG20_APG40

Source Field

CALLATT

Source Section

SHAM

CALLCNG

Number of call attempts that have met congestion. This counter is never decremented

Data Source

MSC_IOG20_APG40

Source Field

CALLCNG

Source Section

SHAM

CALLCNTI

Number of NS/EP calls received from incoming trunks.

Data Source

BSC_IOG20_APG40

Source Field

CALLCNTI

CALLNPPI

Number of NS/EP calls received from incoming trunks, without the Precedence parameter.

Data Source

BSC_IOG20_APG40

Source Field

CALLNPPI

CALLTRF

Number of occupied individuals. The counter gives continuous information on the number of calls which are at a given moment directed through the SSF. The counter is increased at each successful seizure attempt and decreased at release of the call

Data Source

MSC_IOG20_APG40

Source Field

CALLTRF

Source Section

SHAM

CDIALABORTSSF_SESSSF

Number of unsuccessful Dialogues, Aborted locally by SSF

Data Source

MSC_IQG20_APG40

Source Field

CDIALABORTSSF

Source Section

SESSSF

CDIALABORTSSF_SHAM

Number of unsuccessful dialogues, aborted by the SSF

Data Source

MSC_IQG20_APG40

Source Field

CDIALABORTSSF

Source Section

SHAM

CDIALATTFAIL_SESSSF

Number of unsuccessful Dialogues, Activity Test failed

Data Source

MSC_IQG20_APG40

Source Field

CDIALATTFAIL

Source Section

SESSSF

CDIALATTFAIL_SHAM

Number of Unsuccessful Dialogues, Activity Test Failed

Data Source

MSC_IOG20_APG40

Source Field

CDIALATTFAIL

Source Section

SHAM

CDIALINITATT_SESSSF

Number of Dialogue Initiation Attempts

Data Source

MSC_IOG20_APG40

Source Field

CDIALINITATT

Source Section

SESSSF

CDIALINITATT_SHAM

Dialogue Initiation Attempt

Data Source

MSC_IOG20_APG40

Source Field

CDIALINITATT

Source Section

SHAM

CDIALINITCONG_SESSSF

Number of Dialogue Initiation Attempts with congestion

Data Source

MSC_IOG20_APG40

Source Field

CDIALINITCONG

Source Section

SESSSF

CDIALINITCONG_SHAM

Dialogue Initiation Attempt Congestion

Data Source

MSC_IOG20_APG40

Source Field

CDIALINITCONG

Source Section

SHAM

CDIALINPROG_SESSSF

Number of Dialogues in progress

Data Source

MSC_IOG20_APG40

Source Field

CDIALINPROG

Source Section

SESSSF

CDIALINPROG_SHAM

Number of dialogues in progress

Data Source

MSC_IOG20_APG40

Source Field

CDIALINPROG

Source Section

SHAM

CDIALPROCESSED_SESSSF

Total number of Dialogues processed

Data Source

MSC_IQG20_APG40

Source Field

CDIALPROCESSED

Source Section

SESSSF

CDIALPROCESSED_SHAM

Number of processed dialogues

Data Source

MSC_IQG20_APG40

Source Field

CDIALPROCESSED

Source Section

SHAM

CDIALREJTCAP_SESSSF

Number of unsuccessful Dialogues, Message not accepted by TCAP

Data Source

MSC_IQG20_APG40

Source Field

CDIALREJTCAP

Source Section

SESSSF

CDIALREJTCAP_SHAM

Number of unsuccessful dialogues, messages not accepted by TCAP

Data Source

MSC_IQG20_APG40

Source Field

CDIALREJTCAP

Source Section

SHAM

CDIALREMABORT_SESSSF

Number of unsuccessful Dialogues, Aborted by SCF or remote TCAP

Data Source

MSC_IQG20_APG40

Source Field

CDIALREMABORT

Source Section

SESSSF

CDIALREMABORT_SHAM

Number of unsuccessful dialogues, aborted by the SCF or remote TCAP.

Data Source

MSC_IQG20_APG40

Source Field

CDIALREMABORT

Source Section

SHAM

CDIALSCFERRREJ_SESSSF

Number of unsuccessful Dialogues, Error or Reject messages received from SCP

Data Source

MSC_IOG20_APG40

Source Field

CDIALSCFERRREJ

Source Section

SESSSF

CDIALSCFERRREJ_SHAM

Number of error or reject components received from the SCF

Data Source

MSC_IOG20_APG40

Source Field

CDIALSCFERRREJ

Source Section

SHAM

CDIALTIMEOUT

Number of unsuccessful Dialogues, Timeout on response

Data Source

MSC_IOG20_APG40

Source Field

CDIALTIMEOUT

Source Section

SESSSF

CERRREJSEND_SESSSF

Number of Error or Reject messages sent by SSP

Data Source

MSC_IOG20_APG40

Source Field

CERRREJSEND

Source Section

SESSSF

CERRREJSEND_SHAM

Number of error or reject components sent by the SSF

Data Source

MSC_IOG20_APG40

Source Field

CERRREJSEND

Source Section

SHAM

CGREQ

Number of service requests that are checked for Call Gapping

Data Source

MSC_IOG20_APG40

Source Field

CGREQ

Source Section

SHAM

CHASMSSUCC

Number of successful assignments for SMS on traffic channel

Data Source

MSC_IOG20_APG40

Source Field

CHASMSSUCC

Source Section

CHASSIGNT

CHASMSTOT

Number of assignment attempts for SMS on traffic channel

Data Source

MSC_IQG20_APG40

Source Field

CHASMSTOT

Source Section

CHASSIGNT

CLREQ

Number of service requests that are checked for Call Limit.

Data Source

MSC_IQG20_APG40

Source Field

CLREQ

Source Section

SHAM

COMPCLI

Number of calls where OoBTC is successfully performed and speech compression is applied on incoming Nb side.

Data Source

MSC_IQG20_APG40

Source Field

COMPCLI

Source Section

OOBTCSTAT

COMPCLO

Number of calls where OoBTC is successfully performed and speech compression is applied on outgoing Nb side.

Data Source

MSC_IQG20_APG40

Source Field

COMPCLO

Source Section

OOBTCSTAT

CONNSECT

Total number of simultaneous connection sections

Data Source

MSC_IQG20_APG40

Source Field

CONNSECT

Source Section

C7SCCPUSE

CONNSECT_SS7SCCPUSE

Total number of simultaneous connection sections

Data Source

MSC_IQG20_APG40

Source Field

CONNSECT

Source Section

SS7SCCPUSE

CREFREC

Counter for CREF messages received from MTP

Data Source

MSC_IOG20_APG40

Source Field

CREFREC

Source Section

C7SCQOS

CREFSENT

Counter for CREF messages sent to MTP

Data Source

MSC_IOG20_APG40

Source Field

CREFSENT

Source Section

C7SCQOS

CRREC

Counter for CR messages received from MTP

Data Source

MSC_IOG20_APG40

Source Field

CRREC

Source Section

C7SCQOS

CRSENT

Counter for CR messages sent to MTP

Data Source

MSC_IQG20_APG40

Source Field

CRSENT

Source Section

C7SCQOS

CSENDREQREJ_SESSSF

Number of message sending requests rejected by Protocol Adaption

Data Source

MSC_IQG20_APG40

Source Field

CSENDREQREJ

Source Section

SESSSF

CSENDREQREJ_SHAM

Message sending requests rejected by protocol adaption

Data Source

MSC_IQG20_APG40

Source Field

CSENDREQREJ

Source Section

SHAM

CTMACTMSD

Number of successful initial channel assignments on remote A-interface

Data Source

MSC_IQG20_APG40

Source Field

CTMACTMSD

Source Section

CHASSIGNT

CTMAMSSUP

Number of initial channel assignments on remote A-interface when CTM text telephony is requested by the MS

Data Source

MSC_IQG20_APG40

Source Field

CTMAMSSUP

Source Section

CHASSIGNT

CTMANCTMSD

Number of successful initial channel assignments on remote A-interface when CTM text telephony is requested by the MS but no CTM function is seized in C-MGW

Data Source

MSC_IQG20_APG40

Source Field

CTMANCTMSD

Source Section

CHASSIGNT

CTMIUCTMSD

Number of successful initial channel assignments on Iu-interface when CTM Text Telephony is requested by the MS and CTM function is seized in C-MGW

Data Source

MSC_IQG20_APG40

Source Field

CTMIUCTMSD

Source Section

CHASSIGNT

CTMIUMSSUP

Number of initial channel assignments on Iu-interface when CTM (Cellular Text Telephony Modem) text telephony is requested by the MS

Data Source

MSC_IQG20_APG40

Source Field

CTMIUMSSUP

Source Section

CHASSIGNT

CTMIUNCTMSD

Number of successful initial channel assignments on Iu-interface when CTM text telephony is requested by the MS but no CTM function is seized in C-MGW

Data Source

MSC_IQG20_APG40

Source Field

CTMIUNCTMSD

Source Section

CHASSIGNT

DIAATT

Number of dialogue seizure attempts

Data Source

MSC_IOG20_APG40

Source Field

DIAATT

Source Section

SHAM

DIACNG

Number of dialogue seizure attempts that meet congestion

Data Source

MSC_IOG20_APG40

Source Field

DIACNG

Source Section

SHAM

DIATRF

Number of occupied individuals. The counter is increased at each successful dialogue seizure attempt and decreased at release of the dialogue

Data Source

MSC_IOG20_APG40

Source Field

DIATRF

Source Section

SHAM

DMSU

Number of discarded MSU's

Data Source

MSC_IOG20_APG40

Source Field

DMSU

Source Section

SS7TOTAL

DSIF

Number of discarded MSU's octets

Data Source

MSC_IOG20_APG40

Source Field

DSIF

Source Section

SS7TOTAL

ERRREC

Counter for ERR messages received from MTP

Data Source

MSC_IOG20_APG40

Source Field

ERRREC

Source Section

C7SCQOS

ERRSENT

Counter for ERR messages sent to MTP

Data Source

MSC_IOG20_APG40

Source Field

ERRSENT

Source Section

C7SCQOS

ETCATT

Access attempts or seizure attempts. Total number of times an attempt is made to seize an ETC individual (including failed attempts)

Data Source

MSC_IOG20_APG40

Source Field

ETCATT

Source Section

SHAM

ETCCNG

Number of times an attempted seizure of an ETC individual fails

Data Source

MSC_IOG20_APG40

Source Field

ETCCNG

Source Section

SHAM

ETCTRF

Number of ETC individuals seized or "occupied" at a given instant (instantaneous traffic level).

Data Source

MSC_IOG20_APG40

Source Field

ETCTRF

Source Section

SHAM

GINVOKED

Number of MO GETS call requests.

Data Source

MSC_IOG20_APG40

Source Field

GINVOKED

Source Section

NSEPCALL

HNDSYNER

Number of own handovers with synchronisation error

Data Source

MSC_IOG20_APG40

Source Field

HNDSYNER

Source Section

HNDOVER

IMSU

Number of incoming MSU's

Data Source

MSC_IOG20_APG40

Source Field

IMSU

Source Section

SS7TOTAL

ISIF

Number of incoming SIF octets

Data Source

MSC_IQG20_APG40

Source Field

ISIF

Source Section

SS7TOTAL

LUDTREC

LUDT messages received from MTP

Data Source

MSC_IQG20_APG40

Source Field

LUDTREC

Source Section

C7SCQOS

LUDTSENT

LUDT messages sent to MTP

Data Source

MSC_IQG20_APG40

Source Field

LUDTSENT

Source Section

C7SCQOS

LUOTSREC

LUOTS messages received from MTP

Data Source

MSC_IOS20_AP40

Source Field

LUOTSREC

Source Section

C7SCQOS

LUOTSSENT

LUOTS messages sent to MTP

Data Source

MSC_IOS20_AP40

Source Field

LUOTSSENT

Source Section

C7SCQOS

MSC_RELEASE

Release

MSGHAND

Total messages handled from local or remote subsystem

Data Source

MSC_IOS20_AP40

Source Field

MSGHAND

Source Section

C7SCCPUSE

MSGPOL

Counter for syntax error detected

Data Source

MSC_IQG20_APG40

Source Field

MSGPOL

Source Section

C7SCPERF

MSGPOLREJ

Counter for not allowed policed messages

Data Source

MSC_IQG20_APG40

Source Field

MSGPOLREJ

Source Section

C7SCPERF

MSGRCL0

Total messages received for connectionless class 0

Data Source

MSC_IQG20_APG40

Source Field

MSGRCL0

Source Section

C7SCCPUSE

MSGRCL1

Total messages received for connectionless class 1

Data Source

MSC_IOG20_APG40

Source Field

MSGRCL1

Source Section

C7SCCPUSE

MSGRQGT

Counter for messages requiring global title translation

Data Source

MSC_IOG20_APG40

Source Field

MSGRQGT

Source Section

C7SCCPUSE

MSGSCL0

Total messages sent for connectionless class 0

Data Source

MSC_IOG20_APG40

Source Field

MSGSCL0

Source Section

C7SCCPUSE

MSGSCL1

Total messages sent for connectionless class 1

Data Source

MSC_IOG20_APG40

Source Field

MSGSCL1

Source Section

C7SCCPUSE

MSINVDPC

Number of MSUs discarded due to invalid destination point code

Data Source

MSC_IOG20_APG40

Source Field

MSINVDPC

Source Section

SS7TOTAL

MSINVSIO

Number of MSUs discarded due to invalid Service Indicator Octet

Data Source

MSC_IOG20_APG40

Source Field

MSINVSIO

Source Section

SS7TOTAL

MTNSEPPCALL

Number of mobile terminating NS/EP calls for which polling for a MGW is done.

Data Source

MSC_IOG20_APG40

Source Field

MTNSEPPCALL

Source Section

NSEPCALL

MTNSEPPFREL

Number of mobile terminating NS/EP calls for which attempts to select a MGW have been abandoned due to a forward release indication during polling.

Data Source

MSC_IOG20_APG40

Source Field

MTNSEPPFREL

Source Section

NSEPCALL

NACCBLOT

Accumulated system blocking time, in seconds.

Data Source

MSC_IOG20_APG40

Source Field

NACCBLOT

Source Section

CP

NACTINDIC

Number of received MS Activity Indication messages

Data Source

MSC_IOG20_APG40

Source Field

NACTINDIC

Source Section

GPRSGS

NALERT

Number of sent Alert Request messages

Data Source

MSC_IQG20_APG40

Source Field

NALERT

Source Section

GPRSGS

NAUTDISCLDC

Number of automatically disconnected calls due to long duration call

Data Source

MSC_IQG20_APG40

Source Field

NAUTDISCLDC

NAUTFTCSUCC

Number of successful requests for authentication parameters from HLR

Data Source

MSC_IQG20_APG40

Source Field

NAUTFTCSUCC

Source Section

SECHAND

NAUTFTCTOT

Number of request attempts for authentication parameters from HLR

Data Source

MSC_IOG20_APG40

Source Field

NAUTFTCTOT

Source Section

SECHAND

NAUTMACFAIL

Number of failed authentication due to invalid Message Authentication Code (MAC)

Data Source

MSC_IOG20_APG40

Source Field

NAUTMACFAIL

Source Section

SECHAND

NAUTPPREJ

Number of authentication reject received from PP

Data Source

MSC_IOG20_APG40

Source Field

NAUTPPREJ

Source Section

SECHAND

NAUTPPREP

Number of authentication reply received from PP

Data Source

MSC_IQG20_APG40

Source Field

NAUTPPREP

Source Section

SECHAND

NAUTPPREQ

Number of authentication requests sent to PP

Data Source

MSC_IQG20_APG40

Source Field

NAUTPPREQ

Source Section

SECHAND

NAUTREAFLT

Number of unsuccessful TMSI reallocations

Data Source

MSC_IQG20_APG40

Source Field

NAUTREAFLT

Source Section

SECHAND

NAUTREATOT

Number of TMSI reallocation attempts

Data Source

MSC_IQG20_APG40

Source Field

NAUTREATOT

Source Section

SECHAND

NAUTREQSUCC

Number of successful authentications including check of SRES

Data Source

MSC_IQG20_APG40

Source Field

NAUTREQSUCC

Source Section

SECHAND

NAUTREQTOT

Number of sent authentication requests

Data Source

MSC_IQG20_APG40

Source Field

NAUTREQTOT

Source Section

SECHAND

NAUTRESYNCH

Number of failed authentication due to resynchronization

Data Source

MSC_IQG20_APG40

Source Field

NAUTRESYNCH

Source Section

SECHAND

NAUTSREERR

Number of failed authentications due to invalid SRES

Data Source

MSC_IQG20_APG40

Source Field

NAUTSREERR

Source Section

SECHAND

NAUTTMSIERR

Number of failed authentications with TMSI due to invalid SRES

Data Source

MSC_IQG20_APG40

Source Field

NAUTTMSIERR

Source Section

SECHAND

NAUTTMSISUCC

Number of successful authentications with IMSI after failed TMSI authentication

Data Source

MSC_IQG20_APG40

Source Field

NAUTTMSISUCC

Source Section

SECHAND

NAUTTMSITOT

Number of sent authentication requests with TMSI

Data Source

MSC_IOG20_APG40

Source Field

NAUTTMSITOT

Source Section

SECHAND

NAUTUSETOT

Number of authentication requests using used triplets

Data Source

MSC_IOG20_APG40

Source Field

NAUTUSETOT

Source Section

SECHAND

NBLOCLMACC

Accumulated number of blocked CLMs.

Data Source

MSC_IOG20_APG40

Source Field

NBLOCLMACC

Source Section

GRPSWITCH

NBLOEMUXAACC

Accumulated value of BLOEMUXA obtained during NSCAN scans.

Data Source

MSC_IQG20_APG40

Source Field

NBLOEMUXAACC

Source Section

GRPSWITCH

NBLOEMUXACC

Accumulated value of BLOEMUX obtained during NSCAN scans.

Data Source

MSC_IQG20_APG40

Source Field

NBLOEMUXACC

Source Section

GRPSWITCH

NBLOEMUXBACC

Accumulated value of BLOEMUXB obtained during NSCAN scans.

Data Source

MSC_IQG20_APG40

Source Field

NBLOEMUXBACC

Source Section

GRPSWITCH

NBLOL

Number of RP's in blocking state, man. blocked.

Data Source

MSC_IQG20_APG40

Source Field

NBLOL

Source Section

RP

NBLOSPMAACC

Number of blocked SPM's in the A-plane

Data Source

MSC_IQG20_APG40

Source Field

NBLOSPMAACC

Source Section

GRPSWITCH

NBLOSPMACC

Number of blocked SPM's in both planes

Data Source

MSC_IQG20_APG40

Source Field

NBLOSPMACC

Source Section

GRPSWITCH

NBLOSPMBACC

Number of blocked SPM's in the B-plane

Data Source

MSC_IQG20_APG40

Source Field

NBLOSPMBACC

Source Section

GRPSWITCH

NBLOTSMAACC

Accumulated number of blocked TSMs in the A-plane.

Data Source

MSC_IQG20_APG40

Source Field

NBLOTSMAACC

Source Section

GRPSWITCH

NBLOTSMACC

Accumulated number of blocked TSMs in both planes.

Data Source

MSC_IQG20_APG40

Source Field

NBLOTSMACC

Source Section

GRPSWITCH

NBLOTSMBACC

Accumulated number of blocked TSMs in the B-plane.

Data Source

MSC_IQG20_APG40

Source Field

NBLOTSMBACC

Source Section

GRPSWITCH

NCACOLDG

Number of caller interaction messages sent to collect digits.

Data Source

MSC_IQG20_APG40

Source Field

NCACOLDG

Source Section

TCAPBAS

NCANOSUBD

Number of calls not allowed because Feature Logic/subscriber data not located.

Data Source

MSC_IQG20_APG40

Source Field

NCANOSUBD

Source Section

TCAPBAS

NCAPREJCNT

Accumulations in requested HLR

Data Source

MSC_IQG20_APG40

Source Field

NCAPREJCNT

Source Section

LOAS

NCAPREQCNT

Number of Processor capacity requested in HLR

Data Source

MSC_IOG20_APG40

Source Field

NCAPREQCNT

Source Section

LOAS

NCELHUNNSUCC

Number of successful handovers to the target cell from unspecified neighboring serving cells.

Data Source

MSC_IOG20_APG40

Source Field

NCELHUNNSUCC

Source Section

CELLSTAT

NCELHUNNTOT

Number of handover attempts to the target cell from unspecified neighboring serving cells.

Data Source

MSC_IOG20_APG40

Source Field

NCELHUNNTOT

Source Section

CELLSTAT

NCELHUNSUCC

Number of successful handovers to the target cell from unknown serving cells.

Data Source

MSC_IOG20_APG40

Source Field

NCELHUNSUC

Source Section

CELLSTAT

NCELHUNTOT

Number of handover attempts to the target cell from unknown serving cells.

Data Source

MSC_IQG20_APG40

Source Field

NCELHUNTOT

Source Section

CELLSTAT

NCHAFRMSUC

Number of successful channel assignments for call from mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NCHAFRMSUC

Source Section

CHASSIGNT

NCHAFRMTOT

Number of channel assignments for call from mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NCHAFRMTOT

Source Section

CHASSIGNT

NCHATOMSUCC

Number of successful channel assignments for call to mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NCHATOMSUCC

Source Section

CHASSIGNT

NCHATOMTOT

Number of channel assignments for call to mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NCHATOMTOT

Source Section

CHASSIGNT

NCIPATTTOT

Number of ciphering mode attempts

Data Source

MSC_IQG20_APG40

Source Field

NCIPATTTOT

Source Section

SECHAND

NCIPHREJ

Number of MM cipher reject in response PP request

Data Source

MSC_IOG20_APG40

Source Field

NCIPHREJ

Source Section

SECHAND

NCIPHREQ

Number of MM cipher request towards PP

Data Source

MSC_IOG20_APG40

Source Field

NCIPHREQ

Source Section

SECHAND

NCIPSETSUCC

Number of successful ciphering mode settings.

Data Source

MSC_IOG20_APG40

Source Field

NCIPSETSUCC

Source Section

SECHAND

NCLM

Number of CLMs.

Data Source

MSC_IQG20_APG40

Source Field

NCLM

Source Section

GRPSWITCH

NCPABLOT

Accumulated time of blocked CP-unit, automatically blocked, in seconds.

Data Source

MSC_IQG20_APG40

Source Field

NCPABLOT

Source Section

CP

NCPMBLOT

Accumulated time of blocked CP-unit, manually blocked, in seconds.

Data Source

MSC_IQG20_APG40

Source Field

NCPMBLOT

Source Section

CP

NCTDCANCLOCDISC

Nr of disconn calls due to Call Teardown init by Location Cancel mess from HLR

Data Source

MSC_IQG20_APG40

Source Field

NCTDCANCLOCDISC

Source Section

DISCCALL

NCTDDISC

Number of disconnected calls due to Call Teardown initiated by command

Data Source

MSC_IQG20_APG40

Source Field

NCTDDISC

Source Section

DISCCALL

NDETGPRS

Number of received GPRS Detach messages

Data Source

MSC_IQG20_APG40

Source Field

NDETGPRS

Source Section

GPRSGS

NDISCCLINKMGWT

Number of calls disconnected due to wrong exchange data configuration (incompatible MGW types on incoming and outgoing access)

Data Source

MSC_IQG20_APG40

Source Field

NDISCCLINKMGWT

NDRPOVRLD

Number of incoming messages dropped due to an overload condition.

Data Source

MSC_IQG20_APG40

Source Field

NDRPOVRLD

Source Section

TCAPBAS

NDTAP1TOT

Total number of initiated DTAP messages for Location Services

Data Source

MSC_IQG20_APG40

Source Field

NDTAP1TOT

Source Section

DTAPLCS

NDTAPAGPS

Nr of accepted messages req dechiperer keys or assistance data for A-GPS

Data Source

MSC_IQG20_APG40

Source Field

NDTAPAGPS

Source Section

DTAPLCS

NDTAPEOTD

Nr of accepted messages req dechipering keys or assistance data for E-OTD

Data Source

MSC_IOG20_APG40

Source Field

NDTAPEOTD

Source Section

DTAPLCS

NDTAPEXTOT

Total Nr of accepted mess req that Location Estimate is sent to a specific LCS

Data Source

MSC_IOG20_APG40

Source Field

NDTAPEXTOT

Source Section

DTAPLCS

NDTAPMSTOT

Total Nr of accepted mess requesting that Location Estimate is sent to the MS

Data Source

MSC_IOG20_APG40

Source Field

NDTAPMSTOT

Source Section

DTAPLCS

NDTAPSTOT

Total number of successful messages

Data Source

MSC_IOG20_APG40

Source Field

NDTAPSTOT

Source Section

DTAPLCS

NEMUX

Number of EMUXs.

Data Source

MSC_IOG20_APG40

Source Field

NEMUX

Source Section

GRPSWITCH

NEQIDBLKTOT

Number of IMEI check results from EIR where 'black listed' indicated

Data Source

MSC_IOG20_APG40

Source Field

NEQIDBLKTOT

Source Section

EQIDCON

NEQIDEIRTOT

Number of IMEI check attempts to EIR

Data Source

MSC_IOG20_APG40

Source Field

NEQIDEIRTOT

Source Section

EQIDCON

NEQIDGRYTOT

Number of IMEI check results from EIR where 'grey listed' indicated

Data Source

MSC_IQG20_APG40

Source Field

NEQIDGRYTOT

Source Section

EQIDCON

NEQIDMSSUCC

Number of successful IMEI fetches from MS

Data Source

MSC_IQG20_APG40

Source Field

NEQIDMSSUCC

Source Section

EQIDCON

NEQIDTOT

Number of IMEI fetch attempts towards MS

Data Source

MSC_IQG20_APG40

Source Field

NEQIDTOT

Source Section

EQIDCON

NEQIDUNKTOT

Number of IMEI check results from EIR where 'unknown' indicated

Data Source

MSC_IQG20_APG40

Source Field

NEQIDUNKTOT

Source Section

EQIDCON

NEQIDWHITOT

Number of IMEI check attempts to EIR where 'white listed' indicated

Data Source

MSC_IQG20_APG40

Source Field

NEQIDWHITOT

Source Section

EQIDCON

NERPROT

Number of error messages received because of a protocol error.

Data Source

MSC_IQG20_APG40

Source Field

NERPROT

Source Section

TCAPBAS

NERRCV

Number of error messages received (not within a termination message).

Data Source

MSC_IOG20_APG40

Source Field

NERRCV

Source Section

TCAPBAS

NERRUNEXD

Number of error messages received because of unexpected data.

Data Source

MSC_IOG20_APG40

Source Field

NERRUNEXD

Source Section

TCAPBAS

NERSUNEXD

Number of error messages sent because of unexpected data.

Data Source

MSC_IOG20_APG40

Source Field

NERSUNEXD

Source Section

TCAPBAS

NFENSUP

Number of CAMEL phase 3 data received but not supported

Data Source

MSC_IOG20_APG40

Source Field

NFENSUP

Source Section

CAMEL3

NFORLAPT

Number of forlopps aborted by APT.

Data Source

MSC_IOG20_APG40

Source Field

NFORLAPT

Source Section

CP

NFORLAPZ

Number of forlopps aborted by APZ.

Data Source

MSC_IOG20_APG40

Source Field

NFORLAPZ

Source Section

CP

NFORLMAN

Number of forlopps aborted manually.

Data Source

MSC_IOG20_APG40

Source Field

NFORLMAN

Source Section

CP

NFTDIEX

Number of incoming external calls fetched from the Exchange Input Load Supervision function.

Data Source

MSC_IQG20_APG40

Source Field

NFTDIEX

Source Section

LOAS

NFTDMHI

emergency calls and packet channel allocation attempts fetched from the Exchange Input Load Supervision Function

Data Source

MSC_IQG20_APG40

Source Field

NFTDMHI

Source Section

LOAS

NFTDMLO

The number of fetched high- and low priority maintenance tasks in Base Level Load Regulation.

Data Source

MSC_IQG20_APG40

Source Field

NFTDMLO

Source Section

LOAS

NFTDNPRI

Number of non-priority originating calls fetched from the Processor Load Control function

Data Source

MSC_IQG20_APG40

Source Field

NFTDNPRI

Source Section

LOAS

NFTDORG

originating calls (emergency calls not included) fetched from the Exchange Input Load Supervision function.

Data Source

MSC_IQG20_APG40

Source Field

NFTDORG

Source Section

LOAS

NFTDPRI

Number of priority originating calls fetched from the Processor Load Control function

Data Source

MSC_IQG20_APG40

Source Field

NFTDPRIO

Source Section

LOAS

NFTDTCAP

Number of accepted processor capacity requests for low priority TCAP messages

Data Source

MSC_IOG20_APG40

Source Field

NFTDTCAP

Source Section

LOAS

NGUHBSCRNCSUCC

Number of successful handovers from BSC to RNC

Data Source

MSC_IOG20_APG40

Source Field

NGUHBSCRNCSUCC

Source Section

GUHNDOVER

NGUHBSCRNCTOT

Number of handover attempts from BSC to RNC

Data Source

MSC_IOG20_APG40

Source Field

NGUHBSCRNCTOT

Source Section

GUHNDOVER

NGUHNDATTSUCC

Number of handover attempts causing the UE to switch back to the old BSC

Data Source

MSC_IQG20_APG40

Source Field

NGUHNDATTSUCC

Source Section

GUHNDOVER

NGUHNDCMDTOT

Number of handover commands send during GSM to UMTS handover

Data Source

MSC_IQG20_APG40

Source Field

NGUHNDCMDTOT

Source Section

GUHNDOVER

NGUHNDHRQDTOT

Number of received handover required

Data Source

MSC_IQG20_APG40

Source Field

NGUHNDHRQDTOT

Source Section

GUHNDOVER

NGUHNDRELRR

Number of handover faults causing the MSC/VLR server to release the call

Data Source

MSC_IOG20_APG40

Source Field

NGUHNDRELRR

Source Section

GUHNDOVER

NGUHNDSDSUCC

Number of successful handovers from BSC to RNC on signalling channel

Data Source

MSC_IOG20_APG40

Source Field

NGUHNDSDSUCC

Source Section

GUHNDOVER

NGUHNDSDTOT

Number of handover attempts from BSC to RNC on signalling channel

Data Source

MSC_IOG20_APG40

Source Field

NGUHNDSDTOT

Source Section

GUHNDOVER

NGUHNDSHTSUCC

Nr of succ hos from BSC to RNC from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NGUHNDSTSUC

Source Section

GUHNDOVER

NGUHNDSTTOT

Number of handover attempts from BSC to RNC from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NGUHNDSTTOT

Source Section

GUHNDOVER

NGURELCGSSUC

Nr of switch orders to the MGW triggered by reloc compl during GSM to UMTS ho

Data Source

MSC_IOG20_APG40

Source Field

NGURELCGSSUC

Source Section

GUHNDOVER

NGURELDGSSUC

Nr of switch orders to the MGW triggered by reloc detect during GSM to UMTS ho

Data Source

MSC_IOG20_APG40

Source Field

NGURELDGSSUCC

Source Section

GUHNDOVER

NGURELREQSUCC

Number of successful GSM TO UMTS relocation requests to the target RNC

Data Source

MSC_IQG20_APG40

Source Field

NGURELREQSUCC

Source Section

GUHNDOVER

NGURELREQTOT

Number of sent relocation requests to the target RNC

Data Source

MSC_IQG20_APG40

Source Field

NGURELREQTOT

Source Section

GUHNDOVER

NHNDATTSUCC

Number of handover attempts causing the MS to switch back to old traffic channel

Data Source

MSC_IQG20_APG40

Source Field

NHNDATTSUCC

Source Section

HNDOVER

NHNDBSSSUCC

Number of successful inter-BSS handovers which are successful intra-MSC handovers

Data Source

MSC_IQG20_APG40

Source Field

NHNDBSSSUCC

Source Section

HNDOVER

NHNDBSSTOT

Number of inter-BSS handover attempts which are intra-MSC handover attempts

Data Source

MSC_IQG20_APG40

Source Field

NHNDBSSTOT

Source Section

HNDOVER

NHNDCGSSUCC

Number of Group Switch (GS)-operations triggered by handover complete

Data Source

MSC_IQG20_APG40

Source Field

NHNDCGSSUCC

Source Section

HNDOVER

NHNDCMDTOT

Number of sent handover commands

Data Source

MSC_IOG20_APG40

Source Field

NHNDCMDTOT

Source Section

HNDOVER

NHNDDGSSUCC

Number of GS-operations triggered by handover detect

Data Source

MSC_IOG20_APG40

Source Field

NHNDDGSSUCC

Source Section

HNDOVER

NHNDEBSSUCC

Number of successful external intra-BSS handovers

Data Source

MSC_IOG20_APG40

Source Field

NHNDEBSSUCC

Source Section

HNDOVER

NHNDEBSTOT

Number of external intra-BSS handover attempts

Data Source

MSC_IQG20_APG40

Source Field

NHNDEBSTOT

Source Section

HNDOVER

NHNDESHSUCC

Number of successful external intra-BSS handovers on

Data Source

MSC_IQG20_APG40

Source Field

NHNDESHSUCC

Source Section

HNDOVER

NHNDESHTOT

Number of external intra-BSS handover attempts on SDCCH

Data Source

MSC_IQG20_APG40

Source Field

NHNDESHTOT

Source Section

HNDOVER

NHNDESTSUCC

Number of successful external intra-BSS handovers from SDCCH to Traffic Channel (TCH)

Data Source

MSC_IQG20_APG40

Source Field

NHNDESTSUCC

Source Section

HNDOVER

NHNDESTTOT

Number of external intra-BSS handover attempts from SDCCH to TCH

Data Source

MSC_IQG20_APG40

Source Field

NHNDESTTOT

Source Section

HNDOVER

NHNDIBSSUCC

Number of successful internal intra-BSS handovers (handover performed)

Data Source

MSC_IQG20_APG40

Source Field

NHNDIBSSUCC

Source Section

HNDOVER

NHNDRELERR

HO faults causing the MSC to release the call

Data Source

MSC_IQG20_APG40

Source Field

NHNDRELERR

Source Section

HNDOVER

NHNDREQSUCC

Number of successful handover requests to the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NHNDREQSUCC

Source Section

HNDOVER

NHNDREQTOT

Number of sent handover requests to the target BSC

Data Source

MSC_IQG20_APG40

Source Field

NHNDREQTOT

Source Section

HNDOVER

NHNRQDTOT

Number of received handover required

Data Source

MSC_IQG20_APG40

Source Field

NHNRQDTOT

Source Section

HNDOVER

NHNDSDHSUCC

Number of successful inter-BSS handovers on SDCCH which are successful intra-MSC handovers

Data Source

MSC_IQG20_APG40

Source Field

NHNDSDHSUCC

Source Section

HNDOVER

NHNDSDHTOT

Number of inter-BSS handover attempts on SDCCH which are intra-MSC handover attempts

Data Source

MSC_IQG20_APG40

Source Field

NHNDSDHTOT

Source Section

HNDOVER

NHNSHTSUCC

Number of successful inter-BSS handovers from SDCCH to TCH which are successful intra-MSC handovers

Data Source

MSC_IQG20_APG40

Source Field

NHNSHTSUCC

Source Section

HNDOVER

NHNSHTTOT

Number of inter-BSS handover attempts from SDCCH to TCH which are intra-MSC handovers

Data Source

MSC_IQG20_APG40

Source Field

NHNSHTTOT

Source Section

HNDOVER

NHNDTGSSUCC

Number of GS-operations triggered by timer

Data Source

MSC_IQG20_APG40

Source Field

NHNDTGSSUCC

Source Section

HNDOVER

NHWFAULTS

Number of lost calls due to HW Faults

Data Source

MSC_IQG20_APG40

Source Field

NHWFAULTS

Source Section

EXCHFAULT

NINC

Number of NS/EP calls received from incoming trunks.

Data Source

MSC_IOG20_APG40

Source Field

NINC

Source Section

NSEPCALL

NINCASSG

Number of MT NS/EP calls after successful TCH assignment.

Data Source

MSC_IOG20_APG40

Source Field

NINCASSG

Source Section

NSEPCALL

NINCTERM

Number of NS/EP call received on incoming trunks whose destination is an MS served by this MSC.

Data Source

MSC_IOG20_APG40

Source Field

NINCTERM

Source Section

NSEPCALL

NIRNFRMSUCC

Nr of accepted 6 Kb/s non-transparent full rate service requests in moc

Data Source

MSC_IOG20_APG40

Source Field

NIRNFRMSUCC

Source Section

IRNEG

NIRNFRMTOT

Nr of 6 Kb/s non-transparent full rate service req in mobile originated calls

Data Source

MSC_IOG20_APG40

Source Field

NIRNFRMTOT

Source Section

IRNEG

NIRNTOSUCC

Nr of accepted 6 Kb/s non-transparent full rate service offers in mtc

Data Source

MSC_IOG20_APG40

Source Field

NIRNTOSUCC

Source Section

IRNEG

NIRNTOTOT

Nr of 6 Kb/s non-transparent full rate service offers in mtc

Data Source

MSC_IOG20_APG40

Source Field

NIRNTOTOT

Source Section

IRNEG

NL3CCONF

Number of received Layer 3 Call Control CALL CONFIRMED messages

Data Source

MSC_IOG20_APG40

Source Field

NL3CCONF

Source Section

L3CCMSG

NL3CPROC

Number of sent Layer 3 Call Control CALL PROCEEDING messages

Data Source

MSC_IOG20_APG40

Source Field

NL3CPROC

Source Section

L3CCMSG

NLDC

Number of calls that have a duration longer than the predefined limit

Data Source

MSC_IOG20_APG40

Source Field

NLDC

NLIM2OLDSUCC

Number of successful IMSI attached location updatings for already registered subscribers over Gs interface).

Data Source

MSC_IQG20_APQ40

Source Field

NLIM2OLDSUCC

Source Section

UPDLOCAT2

NLNOLDSUCC

Number of successful normal location updatings for already registered subscribers over A and Iu-interface

Data Source

MSC_IQG20_APQ40

Source Field

NLNOLDSUCC

Source Section

UPDLOCAT

NLNOLDTOT

Number of normal location updating attempts for already registered subscribers over A and Iu-interface.

Data Source

MSC_IQG20_APQ40

Source Field

NLNOLDTOT

Source Section

UPDLOCAT

NLNPQFAIL

Number of failed LNP database queries

Data Source

MSC_IOG20_APG40

Source Field

NLNPQFAIL

Source Section

LNPMaint

NLNPQPORT

Number of LNP-SCP responses with LRN

Data Source

MSC_IOG20_APG40

Source Field

NLNPQPORT

Source Section

LNPMaint

NLNPQTOT

Total number of LNP database queries

Data Source

MSC_IOG20_APG40

Source Field

NLNPQTOT

Source Section

LNPMaint

NLOCATT2TOT

Number of IMSI attach messages received (from already registered subscribers 2nd block)

Data Source

MSC_IQG20_APG40

Source Field

NLOCATT2TOT

Source Section

UPDLOCAT

NLOCATTTOT

IMSI attach messages received (that is, when the IMSI becomes active in the same location area where it was detached)

Data Source

MSC_IQG20_APG40

Source Field

NLOCATTTOT

Source Section

UPDLOCAT

NLOCCONGSUCC

successful location updating indications sent to mobile subscribers, resulting from failure of operations 'update location' to HLR due to network congestion

Data Source

MSC_IQG20_APG40

Source Field

NLOCCONGSUCC

Source Section

UPDLOCAT

NLOCDET2TOT

Number of IMSI detach messages received (2nd block)

Data Source

MSC_IOG20_APG40

Source Field

NLOCDET2TOT

Source Section

UPDLOCAT

NLOCDETTOT

Number of IMSI detach messages received

Data Source

MSC_IOG20_APG40

Source Field

NLOCDETTOT

Source Section

UPDLOCAT

NLOGPRSSUCC

Number of successful location updatings over Gs interface

Data Source

MSC_IOG20_APG40

Source Field

NLOGPRSSUCC

Source Section

UPDLOCAT

NLOGPRSTOT

Number of location updating attempts over Gs interface

Data Source

MSC_IOG20_APG40

Source Field

NLOGPRSTOT

Source Section

UPDLOCAT

NLOCIDTTOT

Number of implicit detach events in an MSC/VLR

Data Source

MSC_IQG20_APQ40

Source Field

NLOCIDTTOT

Source Section

UPDLOCAT

NLOCIMS2ERR

Number of failed location updating attempts due to unknown IMSI number series (2nd block)

Data Source

MSC_IQG20_APQ40

Source Field

NLOCIMS2ERR

Source Section

UPDLOCAT

NLOCIMSERR

Number of failed location updating attempts due to unknown IMSI number series

Data Source

MSC_IQG20_APQ40

Source Field

NLOCIMSERR

Source Section

UPDLOCAT

NLOCNRG2SUCC

Number of successful location updatings for non registered subscribers (2nd block)

Data Source

MSC_IQG20_APG40

Source Field

NLOCNRG2SUCC

Source Section

UPDLOCAT

NLOCNRG2TOT

Number of location updating attempts from non-registered subscribers (2nd block)

Data Source

MSC_IQG20_APG40

Source Field

NLOCNRG2TOT

Source Section

UPDLOCAT

NLOCNRGSUCC

Successful location updatings for non-registered subscribers

Data Source

MSC_IQG20_APG40

Source Field

NLOCNRGSUCC

Source Section

UPDLOCAT

NLOCNRGTOT

location updating attempts from non registered subscribers (IMSI attach, normal location updating, or periodic location updating)

Data Source

MSC_IOG20_APG40

Source Field

NLOCNRGTOT

Source Section

UPDLOCAT

NLOCNRRTOT

Number of national roaming implicit detach events in MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NLOCNRRTOT

Source Section

UPDLOCAT

NLOCOLD2SUCC

Number of successful location updatings for already registered subscribers (2nd block)

Data Source

MSC_IOG20_APG40

Source Field

NLOCOLD2SUCC

Source Section

UPDLOCAT

NLOCOLD2TOT

Number of location updating attempts for already registered subscribers (2nd block)

Data Source

MSC_IOG20_APG40

Source Field

NLOCOLD2TOT

Source Section

UPDLOCAT

NLOCOLDSUCC

Successful location updatings for already registered subscribers

Data Source

MSC_IOG20_APG40

Source Field

NLOCOLDSUCC

Source Section

UPDLOCAT

NLOCOLDTOT

location updating attempts for already registered subscribers (IMSI attach, location updating, or periodic location updating)

Data Source

MSC_IOG20_APG40

Source Field

NLOCOLDTOT

Source Section

UPDLOCAT

NLOCPERTOT

periodic location updating attempts for already registered subscribers

Data Source

MSC_IQG20_APG40

Source Field

NLOCPERTOT

Source Section

UPDLOCAT

NLOCPUNEWCON

Number of periodic location updating requests when capacity not granted for non-registered subscribers

Data Source

MSC_IQG20_APG40

Source Field

NLOCPUNEWCON

Source Section

UPDLOCAT

NLOCPUOLDCON

Number of periodic location updating requests when capacity not granted for already registered subscribers

Data Source

MSC_IQG20_APG40

Source Field

NLOCPUOLDCON

Source Section

UPDLOCAT

NLOCPUTOTNEW

Number of periodic location updating requests for non-registered subscribers

Data Source

MSC_IQG20_APG40

Source Field

NLOCPUTOTNEW

Source Section

UPDLOCAT

NLOCREGSERR

Number of rejected location updating attempts due to regional subscription

Data Source

MSC_IQG20_APG40

Source Field

NLOCREGSERR

Source Section

UPDLOCAT

NLOCUPDSUCC

Successful location updatings

Data Source

MSC_IQG20_APG40

Source Field

NLOCUPDSUCC

Source Section

UPDLOCAT

NLOLDIMSUC

Number of successful IMSI attached location updatings for already registered subscribers over A and Iu-interface

Data Source

MSC_IQG20_APG40

Source Field

NLOLDIMSUC

Source Section

UPDLOCAT

NLOSTCL

Number of calls lost during conversation due to system restart

Data Source

MSC_IQG20_APG40

Source Field

NLOSTCL

Source Section

RESTART

NLOSTRE

Number of calls lost during call set-up due to system restart

Data Source

MSC_IQG20_APG40

Source Field

NLOSTRE

Source Section

RESTART

NLPERSUCC

Number of successful periodic location updatings over A and Iu-interface

Data Source

MSC_IQG20_APG40

Source Field

NLPERSUCC

Source Section

UPDLOCAT

NLRGA

Number of large restarts without reload, automatically initiated.

Data Source

MSC_IQG20_APG40

Source Field

NLRGA

Source Section

CP

NLRGM

Number of large restarts without reload, manually initiated.

Data Source

MSC_IQG20_APG40

Source Field

NLRGM

Source Section

CP

NLTMISTOT

Number of calls rejected due to LATA mismatch

Data Source

MSC_IOG20_APG40

Source Field

NLTMISTOT

Source Section

LATAMISTAT

NMANDISCLDC

Number of manually disconnected long duration calls

Data Source

MSC_IOG20_APG40

Source Field

NMANDISCLDC

NMAPVERR

Number of unsuccessful attempts to use MAP version 2 for the SM transfer pipeline in the SMS-GMSC

Data Source

MSC_IOG20_APG40

Source Field

NMAPVERR

Source Section

SMSGMSC

NMAUABLOT

Accumulated time of blocked MAU/AMU automatically blocked, in seconds.

Data Source

MSC_IOG20_APG40

Source Field

NMAUABLOT

Source Section

CP

NMAUF

Number of MAU/AMU faults

Data Source

MSC_IQG20_APG40

Source Field

NMAUF

Source Section

CP

NMAUMBLOT

Accumulated time of blocked MAU/AMU, manually blocked, in seconds.

Data Source

MSC_IQG20_APG40

Source Field

NMAUMBLOT

Source Section

CP

NMMGSMUCC

Number of accepted service requests for multi-media over 3.1kHz Audio

Data Source

MSC_IQG20_APG40

Source Field

NMMGSMUCC

Source Section

OPTFEAT

NMMGSMTOT

Number of service requests for multi-media over 3.1kHz Audio

Data Source

MSC_IQG20_APG40

Source Field

NMMGSMTOT

Source Section

OPTFEAT

NMMUMTSSUCC

Number of accepted service requests for multi-media over UDI or RDI

Data Source

MSC_IQG20_APG40

Source Field

NMMUMTSSUCC

Source Section

OPTFEAT

NMMUMTSTOT

Number of service requests for multi-media over UDI or RDI

Data Source

MSC_IQG20_APG40

Source Field

NMMUMTSTOT

Source Section

OPTFEAT

NMMWPS

Number of invoked WPS calls in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NMMWPS

Source Section

OPTFEAT

NMSCLOCACQSUCC

Number of successful location acquisition procedures

Data Source

MSC_IOG20_APG40

Source Field

NMSCLOCACQSUCC

Source Section

LCSSTAT

NMSCLOCACQTOT

Number of initiated location acquisition procedures

Data Source

MSC_IOG20_APG40

Source Field

NMSCLOCACQTOT

Source Section

LCSSTAT

NMSCP3LOCTOT

Total number of initiated Perform Location messages

Data Source

MSC_IQG20_APG40

Source Field

NMSCP3LOCTOT

Source Section

LCSSTAT

NMSCP4LOCSUCC

Number of successful messages

Data Source

MSC_IQG20_APG40

Source Field

NMSCP4LOCSUCC

Source Section

LCSSTAT

NMSCP5LOCEOTD

Nr of succ messages for which Location Estimate was generated by E-OTD method

Data Source

MSC_IQG20_APG40

Source Field

NMSCP5LOCEOTD

Source Section

LCSSTAT

NMSCP6LOCAGPS

Number of successful messages for which Location Estimate was generated by AGPS method.

Data Source

MSC_IQG20_APG40

Source Field

NMSCP6LOCAGPS

Source Section

LCSSTAT

NMSCP7LOCTIMADV

Nr of succ mess for which Location Estimate was generated by TA method

Data Source

MSC_IQG20_APG40

Source Field

NMSCP7LOCTIMADV

Source Section

LCSSTAT

NMSCP8LOCUTDOA

Number of successful messages for which Location Estimate was generated by U-TDOA method.

Data Source

MSC_IQG20_APG40

Source Field

NMSCP8LOCUTDOA

Source Section

LCSSTAT

NMSFRMSCCI

Number of successful RAB assignments for a call from a mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NMSFRMSCCI

Source Section

CHASSIGNT

NMSFRMTOTI

Total number of RAB assignments for a call from a mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NMSFRMTOTI

Source Section

CHASSIGNT

NMSINFOREQ

Number of sent MS Information Request messages

Data Source

MSC_IQG20_APG40

Source Field

NMSINFOREQ

Source Section

GPRSGS

NMSINFORESP

Number of received MS Information Response messages

Data Source

MSC_IQG20_APG40

Source Field

NMSINFORESP

Source Section

GPRSGS

NMSP6LOCAGPS

Nr of succ messages for which Location Estimate was generated by AGPS method

Data Source

MSC_IQG20_APG40

Source Field

NMSP6LOCAGPS

Source Section

LCSTAT

NMSTOMSCCO

Number of successful RAB assignments for a call to a mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NMSTOMSCCO

Source Section

CHASSIGNT

NMSTOMTOTO

Total number of RAB assignments for a call to a mobile subscriber

Data Source

MSC_IQG20_APG40

Source Field

NMSTOMTOTO

Source Section

CHASSIGNT

NMSUNREACHGPRS

Number of MS Unreachable messages received as a response to a Paging Request message

Data Source

MSC_IOG20_APG40

Source Field

NMSUNREACHGPRS

Source Section

PAGING

NNOCKT

Number of unsuccessful NS/EP calls, not possible to be routed out of the exchange on an o/g trunk.

Data Source

MSC_IOG20_APG40

Source Field

NNOCKT

Source Section

NSEPCALL

NNOPRTY

Number of NS/EP calls received from incoming trunks, without the Precedence parameter.

Data Source

MSC_IOG20_APG40

Source Field

NNOPRTY

Source Section

NSEPCALL

NNOREC

Number of prog executions terminated

Data Source

MSC_IQG20_APG40

Source Field

NNOREC

Source Section

CP

NOCOMPI

Number of calls where OoBTC is successfully performed and speech compression is not applied on Nb incoming side (ie. G.711).

Data Source

MSC_IQG20_APG40

Source Field

NOCOMPI

Source Section

OoBTCSTAT

NOCOMPO

Number of calls where OoBTC is successfully performed and speech compression is not applied on Nb outgoing side (ie. G.711).

Data Source

MSC_IQG20_APG40

Source Field

NOCOMPO

Source Section

OoBTCSTAT

NODBCCTOT

Number of outgoing calls barred due to ODB in MSC/VLR server

Data Source

MSC_IOG20_APG40

Source Field

NODBCCTOT

Source Section

ODB

NODBCIPTOT

Nr of call independent supple-mentary services sub proc barred

Data Source

MSC_IOG20_APG40

Source Field

NODBCIPTOT

Source Section

ODB

NODBCP1TOT

Nr of call related supple-mentary services subscriber procedures barred

Data Source

MSC_IOG20_APG40

Source Field

NODBCP1TOT

Source Section

ODB

NODBCP2TOT

Nr of call related supple-mentary services subscriber procedures

Data Source

MSC_IOG20_APG40

Source Field

NODBCP2TOT

Source Section

ODB

NODBSMTOT

Number of outgoing short messages barred due to ODB in MSC/VLR server

Data Source

MSC_IOG20_APG40

Source Field

NODBSMTOT

Source Section

ODB

NOFFIEX

Number of incoming external calls offered to the Exchange Input Load Supervision function.

Data Source

MSC_IOG20_APG40

Source Field

NOFFIEX

Source Section

LOAS

NOFFMHI

emergency calls and packet channel allocation attempts offered to the Exchange Input Load Supervision Function

Data Source

MSC_IOG20_APG40

Source Field

NOFFMHI

Source Section

LOAS

NOFFMLO

The number of offered high- and low priority maintenance tasks in Base Level Load Regulation.

Data Source

MSC_IOG20_APG40

Source Field

NOFFMLO

Source Section

LOAS

NOFFNPRIO_MSC_LOAS

Number of non-priority originating calls offered to the Processor Load Control function

Data Source

MSC_IOG20_APG40

Source Field

NOFFNPRIO

Source Section

LOAS

NOFFORG

originating calls offered (emergency calls not included) to the Exchange Input Load Supervision function.

Data Source

MSC_IOG20_APG40

Source Field

NOFFORG

Source Section

LOAS

NOFFPRIO_MSC_LOAS

Number of priority originating calls offered to the Processor Load Control function

Data Source

MSC_IOG20_APG40

Source Field

NOFFPRIO

Source Section

LOAS

NOFFTCAP

Number of processor capacity requests for low priority TCAP messages offered to the Processor Load Control function

Data Source

MSC_IOG20_APG40

Source Field

NOFFTCAP

Source Section

LOAS

NORISMSUCC

Number of successful mobile originated short messages in SMS-IWMSC

Data Source

MSC_IOG20_APG40

Source Field

NORISMSUCC

Source Section

SMSIWMSC

NORISMTOT

Number of mobile originated short messages in SMS-IWMSC

Data Source

MSC_IOG20_APG40

Source Field

NORISMTOT

Source Section

SMSIWMSC

NOUTGO

Number of NS/EP calls with an established signaling link to the succeeding exchange.

Data Source

MSC_IOG20_APG40

Source Field

NOUTGO

Source Section

NSEPCALL

NOUTIXC

Number of NS/EP calls with an established signaling link to the succeeding IXC exchange.

Data Source

MSC_IOG20_APG40

Source Field

NOUTIXC

Source Section

NSEPCALL

NOUTIXNC

Number of unsuccessful NS/EP calls to an IXC, not possible to be routed out of the exchange on an o/g trunk.

Data Source

MSC_IQG20_APG40

Source Field

NOUTIXNC

Source Section

NSEPCALL

NPAG1GLTOT

first global page attempts

Data Source

MSC_IQG20_APG40

Source Field

NPAG1GLTOT

Source Section

PAGING

NPAG1GLUTOT

Number of first global page attempts over Iu interface

Data Source

MSC_IQG20_APG40

Source Field

NPAG1GLUTOT

Source Section

PAGING

NPAG1GPRSSUCC

Number of page responses to first page over Gs interface

Data Source

MSC_IQG20_APG40

Source Field

NPAG1GPRSSUCC

Source Section

PAGING

NPAG1GPRSTOT

Number of first page attempts over Gs interface

Data Source

MSC_IQG20_APG40

Source Field

NPAG1GPRSTOT

Source Section

PAGING

NPAG1LOTOT

first local page attempts

Data Source

MSC_IQG20_APG40

Source Field

NPAG1LOTOT

Source Section

PAGING

NPAG1LOUTOT

Number of first local page attempts over Iu interface

Data Source

MSC_IQG20_APG40

Source Field

NPAG1LOUTOT

Source Section

PAGING

NPAG1RESUCC

page responses to first page

Data Source

MSC_IQG20_APG40

Source Field

NPAG1RESUCC

Source Section

PAGING

NPAG1REUSUCC

Number of page responses to first page over Iu interface

Data Source

MSC_IQG20_APG40

Source Field

NPAG1REUSUCC

Source Section

PAGING

NPAG2GLTOT

repeated global page attempts

Data Source

MSC_IOG20_APG40

Source Field

NPAG2GLTOT

Source Section

PAGING

NPAG2GLUTOT

Number of repeated global page attempts over Iu interface

Data Source

MSC_IOG20_APG40

Source Field

NPAG2GLUTOT

Source Section

PAGING

NPAG2GPRSSUCC

Number of page responses to repeated page over Gs interface

Data Source

MSC_IOG20_APG40

Source Field

NPAG2GPRSSUCC

Source Section

PAGING

NPAG2GPRSTOT

Number of repeated page attempts over Gs interface

Data Source

MSC_IOG20_APG40

Source Field

NPAG2GPRSTOT

Source Section

PAGING

NPAG2LOTOT

repeated local page attempts

Data Source

MSC_IOG20_APG40

Source Field

NPAG2LOTOT

Source Section

PAGING

NPAG2LOUTOT

Number of repeated local page attempts over Iu interface

Data Source

MSC_IOG20_APG40

Source Field

NPAG2LOUTOT

Source Section

PAGING

NPAG2RESUCC

page responses to repeated page

Data Source

MSC_IOG20_APG40

Source Field

NPAG2RESUCC

Source Section

PAGING

NPAG2REUSUCC

Number of page responses to repeated page over Iu interface

Data Source

MSC_I0G20_APG40

Source Field

NPAG2REUSUCC

Source Section

PAGING

NPAGAREIU

Number of page responses via A-interface (NPAGARETOT) when paging is done via IU-interface in MUPAG

Data Source

MSC_I0G20_APG40

Source Field

NPAGAREIU

Source Section

PAGING

NPAGERR

Unsuccessful page responses (includes unexpected page responses)

Data Source

MSC_I0G20_APG40

Source Field

NPAGERR

Source Section

PAGING

NPAGGPRSFAIL

Number of paging failures over Gs interface

Data Source

MSC_IQG20_APG40

Source Field

NPAGGPRSFAIL

Source Section

PAGING

NPAGIUREA

Number of page responses via IU-interface (NPAGIURETOT) when paging is done via A-interface in MBPAG

Data Source

MSC_IQG20_APG40

Source Field

NPAGIUREA

Source Section

PAGING

NPAGSMSRES

Number of successful paging responses for SMS

Data Source

MSC_IQG20_APG40

Source Field

NPAGSMSRES

Source Section

PAGING

NPAGSMSTOT

Number of paging attempts for SMS

Data Source

MSC_IQG20_APG40

Source Field

NPAGSMSTOT

Source Section

PAGING

NPAGUERR

Number of unsuccessful page responses (includes unexpected page responses) over Iu interface

Data Source

MSC_IQG20_APG40

Source Field

NPAGUERR

Source Section

PAGING

NPBITF

Number of permanent bitfaults

Data Source

MSC_IQG20_APG40

Source Field

NPBITF

Source Section

CP

NPCPF

Number of permanent CP-faults

Data Source

MSC_IQG20_APG40

Source Field

NPCPF

Source Section

CP

NPERMF

Number of permanent faults in RP

Data Source

MSC_IQG20_APG40

Source Field

NPERMF

Source Section

RP

NQUERR

Number of query messages with error in data.

Data Source

MSC_IQG20_APG40

Source Field

NQUERR

Source Section

TCAPBAS

NQUIREQSV

Number of query messages requesting service.

Data Source

MSC_IQG20_APG40

Source Field

NQUIREQSV

Source Section

TCAPBAS

NREGNOTRSUCC

Number of successful regnot message received from HLR.

Data Source

MSC_IQG20_APG40

Source Field

NREGNOTRSUCC

Source Section

UPDLOCAT

NRELA

Number of large restarts with reload, automatically initiated.

Data Source

MSC_IQG20_APG40

Source Field

NRELA

Source Section

CP

NRELATTSUCC

Number of relocation attempts causing the UE to switch back to the old RNC

Data Source

MSC_IOG20_APG40

Source Field

NRELATTSUCC

Source Section

RELOC

NRELCGSSUCC

Number of switch orders to the GS triggered by relocation complete

Data Source

MSC_IOG20_APG40

Source Field

NRELCGSSUCC

Source Section

RELOC

NRELCMDTOT

Number of sent relocation commands

Data Source

MSC_IOG20_APG40

Source Field

NRELCMDTOT

Source Section

RELOC

NRELDGSSUCC

Number of switch orders to the GS triggered by relocation detect

Data Source

MSC_IOG20_APG40

Source Field

NRELDGSSUCC

Source Section

RELOC

NRELM

Number of large restarts with reload, manually initiated.

Data Source

MSC_IOG20_APG40

Source Field

NRELM

Source Section

CP

NRELRELERR

Number of relocation faults causing the MSC/VLR server to release the call

Data Source

MSC_IOG20_APG40

Source Field

NRELRELERR

Source Section

RELOC

NRELREQSUCC

Number of successful relocation requests to the target RNC

Data Source

MSC_IOG20_APG40

Source Field

NRELREQSUCC

Source Section

RELOC

NRELREQTOT

Number of sent relocation requests to the target RNC

Data Source

MSC_IQG20_APG40

Source Field

NRELREQTOT

Source Section

RELOC

NRELRNCSUCC

Number of successful inter-RNC relocation attempts

Data Source

MSC_IQG20_APG40

Source Field

NRELRNCSUCC

Source Section

RELOC

NRELRNCTOT

Number of inter-RNC relocation attempts

Data Source

MSC_IQG20_APG40

Source Field

NRELRNCTOT

Source Section

RELOC

NRELRQDTOT

Nr of received relocation required (excluding those received during guard time)

Data Source

MSC_IOG20_APG40

Source Field

NRELRQDTOT

Source Section

RELOC

NRELSDHSUCC

Number of successful inter-RNC relocation on signalling channel

Data Source

MSC_IOG20_APG40

Source Field

NRELSDHSUCC

Source Section

RELOC

NRELSDHTOT

Number of inter-RNC relocation attempts on signalling channel

Data Source

MSC_IOG20_APG40

Source Field

NRELSDHTOT

Source Section

RELOC

NREQTERM

Number of request for termination messages sent.

Data Source

MSC_IOG20_APG40

Source Field

NREQTERM

Source Section

TCAPBAS

NRESETRECEIVED

Number of received Reset messages

Data Source

MSC_IOG20_APG40

Source Field

NRESETRECEIVED

Source Section

GPRSGS

NRESETSENT

Number of sent Reset messages

Data Source

MSC_IOG20_APG40

Source Field

NRESETSENT

Source Section

GPRSGS

NRNTLRCTOT

Number of Location Reporting Control messages sent

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRCTOT

Source Section

UMTSPOS

NRNTLRDRTOT

Number or Location Related Data Request messages sent.

Data Source

MSC_IQG20_APG40

Source Field

NRNTLRDRTOT

Source Section

UMTSPOS

NRNTLRDSUCC

Number of Location Related Data Response messages received.

Data Source

MSC_IQG20_APG40

Source Field

NRNTLRDSUCC

Source Section

UMTSPOS

NRNTLRSUCC

Nr of Location Report messages containing geographical co-ordinates received

Data Source

MSC_IQG20_APG40

Source Field

NRNTLRSUCC

Source Section

UMTSPOS

NRP

Number of RP's

Data Source

MSC_IQG20_APG40

Source Field

NRP

Source Section

RP

NRSITAATOT

Nr of mobile initiated interrogations for a tariff area applied to a call

Data Source

MSC_IQG20_APG40

Source Field

NRSITAATOT

Source Section

REGSERVICE

NRSITARTOT

Nr of mobile interr for a tariff area to the current location for subs

Data Source

MSC_IQG20_APG40

Source Field

NRSITARTOT

Source Section

REGSERVICE

NRSOCLOERR

Number of originating call attempts rejected due to local subscription

Data Source

MSC_IQG20_APQ40

Source Field

NRSOCLOERR

Source Section

REGSERVICE

NRSOCLOTOT

Number of originating call attempts within local subscription area

Data Source

MSC_IQG20_APQ40

Source Field

NRSOCLOTOT

Source Section

REGSERVICE

NRSOCTATOT

Number of originating call attempts for subscription with tariff areas

Data Source

MSC_IQG20_APQ40

Source Field

NRSOCTATOT

Source Section

REGSERVICE

NRSPNRCV

Number of response messages not received within expected time period, SCP TA timer expired for caller interaction

Data Source

MSC_IOG20_APG40

Source Field

NRSPNRCV

Source Section

TCAPBAS

NRSPROUT

Number of response messages sent with routing instructions.

Data Source

MSC_IOG20_APG40

Source Field

NRSPROUT

Source Section

TCAPBAS

NRSTCLOERR

Number of terminating call attempts rejected due to local subscription

Data Source

MSC_IOG20_APG40

Source Field

NRSTCLOERR

Source Section

REGSERVICE

NRSTCLOTOT

Number of terminating call attempts within local subscription area

Data Source

MSC_IOG20_APG40

Source Field

NRSTCLOTOT

Source Section

REGSERVICE

NRSTCTATOT

Number of terminating call attempts for subscription with tariff areas

Data Source

MSC_IOG20_APG40

Source Field

NRSTCTATOT

Source Section

REGSERVICE

NSCAN

Accumulations

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

LOAS

NSCAN_GRPSWITCH

Number of accumulations.

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

GRPSWITCH

NSECFRRNSCC

Number of successfully received Security Mode Complete messages

Data Source

MSC_IOG20_APG40

Source Field

NSECFRRNSCC

Source Section

UMTSSEC

NSECTORNTOT

Total Number of sent Security Mode Command messages

Data Source

MSC_IOG20_APG40

Source Field

NSECTORNTOT

Source Section

UMTSSEC

NSEPINCTER

Number of NS/EP call received on incoming trunks whose destination is an MS served by this MSC.

Data Source

BSC_IQG20_APG40

Source Field

NSEPINCTER

NSEPISUC

Number of NS/EP calls with an established signaling link to the succeeding IXC exchange.

Data Source

BSC_IQG20_APG40

Source Field

NSEPISUC

NSEPIUNS

Number of unsuccessful NS/EP calls to an IXC, not possible to be routed out of the exchange on an o/g trunk.

Data Source

BSC_IQG20_APG40

Source Field

NSEPIUNS

NSEPOUT

Number of outgoing NS/EP calls that require a trunk.

Data Source

BSC_IQG20_APG40

Source Field

NSEPOUT

NSEPPCALL

Number of NS/EP calls for which polling for a MGW is done.

Data Source

MSC_IOG20_APG40

Source Field

NSEPPCALL

Source Section

NSEPCALL

NSEPPFREL

Number of NS/EP calls for which attempts to select a MGW have been abandoned due to a forward release indication during polling.

Data Source

MSC_IOG20_APG40

Source Field

NSEPPFREL

Source Section

NSEPCALL

NSEPPTOUT

Number of times the polling timer has expired for NS/EP calls.

Data Source

MSC_IOG20_APG40

Source Field

NSEPPTOUT

Source Section

NSEPCALL

NSEPQCALL

Number of NS/EP calls that have been queued.

Data Source

BSC_IQG20_APG40

Source Field

NSEPQCALL

NSEPQFREL

Number of queued NS/EP calls released due to a forward release.

Data Source

BSC_IQG20_APG40

Source Field

NSEPQFREL

NSEPQOVFL

Total number of times that NS/EP calls fail to queue because the maximum queue length has been reached.

Data Source

BSC_IQG20_APG40

Source Field

NSEPQOVFL

NSEPQTOUT

Total number of times that NS/EP calls are removed from a trunk queue due to queue timer expiry.

Data Source

BSC_IQG20_APG40

Source Field

NSEPQTOUT

NSEPSUCSIG

Number of NS/EP calls with an established signaling link to the succeeding exchange.

Data Source

BSC_IOG20_APG40

Source Field

NSEPSUCSIG

NSEPUNSUCC

Number of unsuccessful NS/EP calls, not possible to be routed out of the exchange on an o/g trunk.

Data Source

BSC_IOG20_APG40

Source Field

NSEPUNSUCC

NSMLA

Number of small restarts automatically initiated.

Data Source

MSC_IOG20_APG40

Source Field

NSMLA

Source Section

CP

NSMLM

Number of small restarts manually initiated.

Data Source

MSC_IOG20_APG40

Source Field

NSMLM

Source Section

CP

NSMSCAOSUCC

Number of successful mobile-originated short messages transferred on the short message relay layer from MSs in the MSC

Data Source

MSC_IQG20_APG40

Source Field

NSMSCAOSUCC

Source Section

SHMSGSERV

NSMSCDOTOT

Number of received mobile-originated short messages on the short message relay layer from MSs in the MSC

Data Source

MSC_IQG20_APG40

Source Field

NSMSCDOTOT

Source Section

SHMSGSERV

NSMSCMRSUCC

Number of successful mobile-terminated short messages transferred on the connection management (CM) layer towards MSs in the MSC

Data Source

MSC_IQG20_APG40

Source Field

NSMSCMRSUCC

Source Section

SHMSGSERV

NSMSCMTOT

Number of mobile-terminated short messages sent on the CM layer towards MSs in the MSC

Data Source

MSC_IQG20_APG40

Source Field

NSMSCMTOT

Source Section

SHMSGSERV

NSMSDBRS

Number of MO-SMS redirections to a new SC Address due to destination based routing.

Data Source

MSC_IQG20_APG40

Source Field

NSMSDBRS

Source Section

SHMSGSERV

NSMSFAIL

Number of MO SMS failures due to rejection from the CAMEL feature

Data Source

MSC_IQG20_APG40

Source Field

NSMSFAIL

Source Section

SHAM

NSMSINV

Number of invocations of access CAMEL service for MO SMS

Data Source

MSC_IOG20_APG40

Source Field

NSMSINV

Source Section

SHAM

NSMSMARTOT

Number of requests for short message memory available from MSs received in MSC

Data Source

MSC_IOG20_APG40

Source Field

NSMSMARTOT

Source Section

SHMSGSERV

NSMSNRFSMTOT

Number of not accepted MAP version 2 operation Ready for SM towards HLR with alert reason 'Memory Available'

Data Source

MSC_IOG20_APG40

Source Field

NSMSNRFSMTOT

Source Section

SHMSGSERV

NSMSNRFSMTOT3

Number of not accepted MAP V3 operation ReadyForSM to HLR

Data Source

MSC_IOG20_APG40

Source Field

NSMSNRFSMTOT3

Source Section

SHMSGSERV

NSMSRAOSUCC

Number of successful mobile-originated short messages transferred on the connection management layer from MSs in the MSC

Data Source

MSC_IOG20_APG40

Source Field

NSMSRAOSUCC

Source Section

SHMSGSERV

NSMSRDOTOT

Number of requests for mobile-originated short messages from MSs received in the MSC

Data Source

MSC_IOG20_APG40

Source Field

NSMSRDOTOT

Source Section

SHMSGSERV

NSMSRDTOT2

Number of requests for originating short message deliveries from an MS. The counter is incremented when MSC receives CM Service Request sent by BS of idle subscribers indicating it is a SMS MO service message, or MSC receives ADDS Transfer message that BS

Data Source

MSC_IOG20_APG40

Source Field

NSMSRDTOT2

Source Section

SHMSGSERV

NSMSSMRLTOT

Number of requests for mobile-terminated short messages towards MSs received in the MSC

Data Source

MSC_IOG20_APG40

Source Field

NSMSSMRLTOT

Source Section

SHMSGSERV

NSMSSRSUCC

Number of successful mobile-terminated short messages transferred on the short message relay layer towards MSs in the MSC

Data Source

MSC_IOG20_APG40

Source Field

NSMSSRSUCC

Source Section

SHMSGSERV

NSPFAXSW1SUCC

Nr of succ alternate speech or fax calls switch from one mode to alternate mode

Data Source

MSC_IOG20_APG40

Source Field

NSPFAXSW1SUCC

Source Section

ALTSERVICE

NSPFAXSW1TOT

Nr of attempts to switch alternate speech or fax call

Data Source

MSC_IOG20_APG40

Source Field

NSPFAXSW1TOT

Source Section

ALTSERVICE

NSPM

Number of SPMs.

Data Source

MSC_IOG20_APG40

Source Field

NSPM

Source Section

GRPSWITCH

NSUCCLIWFBYPASS

Number of successful call attempts requiring "Bypassing of the local IWF for internet calls"

Data Source

MSC_IOG20_APG40

Source Field

NSUCCLIWFBYPASS

Source Section

OPTFEAT

NTATTMPT

Number of outgoing NS/EP calls that require a trunk.

Data Source

MSC_IOG20_APG40

Source Field

NTATTMPT

Source Section

NSEPCALL

NTBITF

Number of temporary bitfaults

Data Source

MSC_IOG20_APG40

Source Field

NTBITF

Source Section

CP

NTBRSMS

Number of Broadcast message attempted successfully from Message Centre

Data Source

MSC_IOG20_APG40

Source Field

NTBRSMS

Source Section

SHMSGSERV

NTBRSMSFAIL

Number of Unsuccessful Broadcast processed

Data Source

MSC_IQG20_APG40

Source Field

NTBRSMSFAIL

Source Section

SHMSGSERV

NTCISTALG

Number of terminated call activities due to reception of MAP IST Alert Response operation in GMSC.

Data Source

BSC_IQG20_APG40

Source Field

NTCISTALG

NTCISTALM

Number of terminated call activities due to reception of MAP IST Alert Response operation in MSC.

Data Source

BSC_IQG20_APG40

Source Field

NTCISTALM

NTCISTCOM

Number of terminated call activities due to reception of MAP IST Command operation in MSC and GMSC.

Data Source

BSC_IQG20_APG40

Source Field

NTCISTCOM

NTCPF

Number of temporary CP-faults

Data Source

MSC_IQG20_APG40

Source Field

NTCPF

Source Section

CP

NTEMPF

Number of temporary faults in RP

Data Source

MSC_IQG20_APG40

Source Field

NTEMPF

Source Section

RP

NTERM

Number of MT NS/EP calls.

Data Source

MSC_IOG20_APG40

Source Field

NTERM

Source Section

NSEPCALL

NTERSMSUCC

Number of successful mobile-terminated short messages in the SMS-GMSC

Data Source

MSC_IOG20_APG40

Source Field

NTERSMSUCC

Source Section

SMSGMSC

NTERSMTOT

Number of mobile-terminated short messages in the SMS-GMSC

Data Source

MSC_IOG20_APG40

Source Field

NTERSMTOT

Source Section

SMSGMSC

NTOTLIWFBYPASS

Number of call attempts requiring "Bypassing of the local IWF for Internet calls"

Data Source

MSC_IOG20_APG40

Source Field

NTOTLIWFBYPASS

Source Section

OPTFEAT

NTQABAND

Number of queued NS/EP calls released due to a forward release.

Data Source

MSC_IQG20_APG40

Source Field

NTQABAND

Source Section

NSEPCALL

NTQOVFL

Total number of times that NS/EP calls fail to queue because the maximum queue length has been reached.

Data Source

MSC_IQG20_APG40

Source Field

NTQOVFL

Source Section

NSEPCALL

NTQQEUD

Number of NS/EP calls that have been queued.

Data Source

MSC_IQG20_APG40

Source Field

NTQQEUD

Source Section

NSEPCALL

NTQTOUT

Total number of times that NS/EP calls are removed from a trunk queue due to queue timer expiry.

Data Source

MSC_IQG20_APG40

Source Field

NTQTOUT

Source Section

NSEPCALL

NTRMER

Number of termination messages received with errors indicated.

Data Source

MSC_IQG20_APG40

Source Field

NTRMER

Source Section

TCAPBAS

NTRMERAB

Number of termination messages received with errors indicating caller abandon.

Data Source

MSC_IQG20_APG40

Source Field

NTRMERAB

Source Section

TCAPBAS

NTRMERSSP

Number of termination messages received with errors indicating SSP failure.

Data Source

MSC_IOG20_APG40

Source Field

NTRMERSSP

Source Section

TCAPBAS

NTRMNRCV

Number of termination messages not received within expected time period.

Data Source

MSC_IOG20_APG40

Source Field

NTRMNRCV

Source Section

TCAPBAS

NTRMRCV

Number of termination messages received.

Data Source

MSC_IOG20_APG40

Source Field

NTRMRCV

Source Section

TCAPBAS

NTSM

Number of TSMs.

Data Source

MSC_IQG20_APG40

Source Field

NTSM

Source Section

GRPSWITCH

NUGHNDATTSUCC

Nr of UMTS to GSM ho attempts causing the MS to switch back to old traffic ch

Data Source

MSC_IQG20_APG40

Source Field

NUGHNDATTSUCC

Source Section

UGHNDOVER

NUGHNDCGSSUCC

Nr of GS-operations triggered by ho complete during UMTS to GSM ho

Data Source

MSC_IQG20_APG40

Source Field

NUGHNDCGSSUCC

Source Section

UGHNDOVER

NUGHNDCMDTOT

Number of sent relocation commands during UMTS to GSM handover

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDCMDTOT

Source Section

UGHNDOVER

NUGHNDDGSSUCC

Nr of GS-operations triggered by ho detect during UMTS to GSM ho

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDDGSSUCC

Source Section

UGHNDOVER

NUGHNDRELERR

Nr of UMTS to GSM ho faults causing the MSC/VLR server to release the call

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDRELERR

Source Section

UGHNDOVER

NUGHNDRELREQSUCC

Number of successful UMTS to GSM handover requests to the target BSC

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDRELREQSUC

Source Section

UGHNDOVER

NUGHNDRELREQTOT

Number of sent UMTS to GSM handover requests to the target BSC

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDRELREQTOT

Source Section

UGHNDOVER

NUGHNDRRQDTOT

Nr of rec relocation req excl those rec during guard time for UMTS to GSM ho

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDRRQDTOT

Source Section

UGHNDOVER

NUGHNDSDSUCC

Number of successful handovers from RNC to BSC on SDCCH

Data Source

MSC_IOG20_APG40

Source Field

NUGHNDSDSUCC

Source Section

UGHNDOVER

NUGHNDSDTOT

Number of handover attempts from RNC to BSC on SDCCH

Data Source

MSC_IQG20_APG40

Source Field

NUGHNDSTTOT

Source Section

UGHNDOVER

NUGHNDSTSUCC

Number of successful handovers from signalling channel to traffic channel

Data Source

MSC_IQG20_APG40

Source Field

NUGHNDSTSUCC

Source Section

UGHNDOVER

NUGHNDSTTOT

Number of handover attempt from signalling channel to traffic channel

Data Source

MSC_IQG20_APG40

Source Field

NUGHNDSDTOT

Source Section

UGHNDOVER

NUGHRNCBSCSUCC

Number of successful handovers from RNC to BSC

Data Source

MSC_IQG20_APG40

Source Field

NUGHRNCBSCSUCC

Source Section

UGHNDOVER

NUGHRNCBSCOT

Number of handover attempts from RNC to BSC

Data Source

MSC_IQG20_APG40

Source Field

NUGHRNCBSCOT

Source Section

UGHNDOVER

NVACANN

Number of vacant code announcement responses sent because of feature logic error.

Data Source

MSC_IQG20_APG40

Source Field

NVACANN

Source Section

TCAPBAS

OCTRETRN

Number of octets retransmitted

Data Source

MSC_IQG20_APG40

Source Field

OCTRETRN

Source Section

SS7TOTAL

OMMSU

Number of originating management MSU's

Data Source

MSC_IQG20_APG40

Source Field

OMMSU

Source Section

SS7TOTAL

OMSIF

Number of originating management MSU octets

Data Source

MSC_IQG20_APG40

Source Field

OMSIF

Source Section

SS7TOTAL

ORGETSTOT

Number of MO GETS call requests.

Data Source

BSC_IQG20_APG40

Source Field

ORGETSTOT

ORWPSSUCC

Number of successful MO WPS calls after successful TCH assignment.

Data Source

BSC_IQG20_APG40

Source Field

ORWPSSUCC

ORWPSTOT

Number of MO WPS call requests.

Data Source

BSC_IQG20_APG40

Source Field

ORWPSTOT

OUMSU

Number of originating SCCP/UP MSU's

Data Source

MSC_IQG20_APG40

Source Field

OUMSU

Source Section

SS7TOTAL

OUSIF

Number of originating SCCP/UP MSU octets

Data Source

MSC_IQG20_APG40

Source Field

OUSIF

Source Section

SS7TOTAL

P95FPHGT

Number of sampled translated MSUs failing normal-load 95% test for CP handling time

Data Source

MSC_IQG20_APG40

Source Field

P95FPHGT

Source Section

SS7TOTAL

P95FPHNT

Number of sampled non-translated MSUs failing normal-load 95% test for CP handling time.

Data Source

MSC_IQG20_APG40

Source Field

P95FPHNT

Source Section

SS7TOTAL

PAIRABLOL

Number of pair of RP's in blocking state,aut. blocked.

Data Source

MSC_IQG20_APG40

Source Field

PAIRABLOL

Source Section

RP

PAIRABLOL1

Number of RP's, in an RP-pair, in blocking state,aut blocked.

Data Source

MSC_IQG20_APG40

Source Field

PAIRABLOL1

Source Section

RP

PAIRMBLOL

Number of pair of RP's in blocking state,man. blocked.

Data Source

MSC_IQG20_APG40

Source Field

PAIRMBLOL

Source Section

RP

PAIRMBLOL1

Number of RP's, in an RP-pair, in blocking state,man blocked.

Data Source

MSC_IQG20_APG40

Source Field

PAIRMBLOL1

Source Section

RP

PERLEN

Period Length

PERLEN_TRAR

Period Length (of TRAR data)

PERLEN_TRART

Period Length (of TRAR data)

RFNETCONG

Counter for routing failure, network congestion

Data Source

MSC_IQG20_APG40

Source Field

RFNETCONG

Source Section

C7SCPERF

RFNETFAIL

Counter for routing failure, network failure (MTP or SCCP failure)

Data Source

MSC_IQG20_APG40

Source Field

RFNETFAIL

Source Section

C7SCPERF

RFSPADDR

Counter for routing failure, no translation for this specific address

Data Source

MSC_IOG20_APG40

Source Field

RFSPADDR

Source Section

C7SCPERF

RFSSNFAIL

Counter for routing failure, subsystem failure

Data Source

MSC_IOG20_APG40

Source Field

RFSSNFAIL

Source Section

C7SCPERF

RFSUADDR

Counter for routing failure, no translation for address of such nature

Data Source

MSC_IOG20_APG40

Source Field

RFSUADDR

Source Section

C7SCPERF

RFUNEQUIP

Counter for routing failure, unequipped user

Data Source

MSC_IOG20_APG40

Source Field

RFUNEQUIP

Source Section

C7SCPERF

RFUNQUAL

Counter for routing failure, reason unqualified

Data Source

MSC_IQG20_APG40

Source Field

RFUNQUAL

Source Section

C7SCPERF

SAMPPHGT

Number of MSUs requiring GTT, sampled for CP handling time

Data Source

MSC_IQG20_APG40

Source Field

SAMPPHGT

Source Section

SS7TOTAL

SAMPPHNT

Number of MSUs not requiring GTT, sampled for CP handling time.

Data Source

MSC_IQG20_APG40

Source Field

SAMPPHNT

Source Section

SS7TOTAL

SCANCNTBLO

Number of scannings for blocking counters

Data Source

MSC_TRART

Source Field

SCANCNTBLO

Source Section

ASC_TRART

SCANCNTTRAFF

Number of scannings for level counters

Data Source

MSC_TRART

Source Field

SCANCNTTRAFF

Source Section

ASC_TRART

SFREQ

Number of service requests that are checked for Service Filtering

Data Source

MSC_IQG20_APG40

Source Field

SFREQ

Source Section

SHAM

SIZEDS

Memory size of data store

Data Source

MSC_IQG20_APG40

Source Field

SIZEDS

Source Section

CP

SIZEPS

Memory size of program store/main store

Data Source

MSC_IQG20_APG40

Source Field

SIZEPS

Source Section

CP

SIZERS

Memory size of reference store

Data Source

MSC_IQG20_APG40

Source Field

SIZERS

Source Section

CP

SRFATT

Access attempts or seizure attempts. Total number of times an attempt is made to seize a SRF individual (including failed attempts).

Data Source

MSC_IOG20_APG40

Source Field

SRFATT

Source Section

SHAM

SRFCNG

Number of times an attempted seizure of a SRF individual fails

Data Source

MSC_IOG20_APG40

Source Field

SRFCNG

Source Section

SHAM

SRFTRF

Number of SRF individuals seized or "occupied" at a given instant (instantaneous traffic level)

Data Source

MSC_IOG20_APG40

Source Field

SRFTRF

Source Section

SHAM

SYERROR

Counter for syntax error detected

Data Source

MSC_IOG20_APG40

Source Field

SYERROR

Source Section

C7SCPERF

TIMEETC

Number of unsuccessful ETC Control connections. Timeout (Tetc) of SRF sanity timer

Data Source

MSC_IOG20_APG40

Source Field

TIMEETC

Source Section

SHAM

TIMEPHGT

Accumulated total of CP handling time for sampled GTT MSUs in ms

Data Source

MSC_IOG20_APG40

Source Field

TIMEPHGT

Source Section

SS7TOTAL

TIMEPHNT

Accumulated total of CP handling time for sampled non-translated MSUs in ms.

Data Source

MSC_IOG20_APG40

Source Field

TIMEPHNT

Source Section

SS7TOTAL

TIMESRF

Number of unsuccessful SRF Control connections. Timeout (Tsrfr) of SRF sanity timer

Data Source

MSC_IOG20_APG40

Source Field

TIMESRF

Source Section

SHAM

TMMSU

Number of terminating management MSU's

Data Source

MSC_IOG20_APG40

Source Field

TMMSU

Source Section

SS7TOTAL

TMSIF

Number of terminating management SIF octets

Data Source

MSC_IOG20_APG40

Source Field

TMSIF

Source Section

SS7TOTAL

TNSEPSUCC

Number of MT NS/EP calls after successful TCH.

Data Source

BSC_IQG20_APG40

Source Field

TNSEPSUCC

TNSEPTOT

Number of MT NS/EP calls.

Data Source

BSC_IQG20_APG40

Source Field

TNSEPTOT

TOTSCBUF1

Total number of simultaneous buffers of 256 octet length

Data Source

MSC_IQG20_APG40

Source Field

TOTSCBUF1

Source Section

C7SCCPUSE

TOTSCBUF2

Total number of simultaneous buffers of 512 octet length

Data Source

MSC_IOG20_APG40

Source Field

TOTSCBUF2

Source Section

C7SCCPUSE

TOTSCBUF3

Total number of simultaneous buffers of 1024 octet length

Data Source

MSC_IOG20_APG40

Source Field

TOTSCBUF3

Source Section

C7SCCPUSE

TOTSCBUF4

Total number of simultaneous buffers of 2048 octet length

Data Source

MSC_IOG20_APG40

Source Field

TOTSCBUF4

Source Section

C7SCCPUSE

TOTTCTBUFF

Total number of simultaneous TCAP buffers

Data Source

MSC_IOG20_APG40

Source Field

TOTTCBUFF

Source Section

TCUSE

TOTTCDIA

Total number of simultaneous TC dialogue individuals

Data Source

MSC_IOG20_APG40

Source Field

TOTTCDIA

Source Section

TCUSE

TOTTCOP

Total number of simultaneous TC operations

Data Source

MSC_IOG20_APG40

Source Field

TOTTCOP

Source Section

TCUSE

TUMSU

Number of terminating SCCP/UP MSU's

Data Source

MSC_IOG20_APG40

Source Field

TUMSU

Source Section

SS7TOTAL

TUSIF

Number of terminating SCCP/UP SIF octets

Data Source

MSC_IQG20_APG40

Source Field

TUSIF

Source Section

SS7TOTAL

UDTREC

Counter for UDT messages received from MTP

Data Source

MSC_IQG20_APG40

Source Field

UDTREC

Source Section

C7SCQOS

UDTSENT

Counter for UDT messages sent to MTP

Data Source

MSC_IQG20_APG40

Source Field

UDTSENT

Source Section

C7SCQOS

UDTSREC

Counter for UDTS messages received from MTP

Data Source

MSC_IQG20_APG40

Source Field

UDTSREC

Source Section

C7SCQOS

UDTSSENT

Counter for UDTS messages sent to MTP

Data Source

MSC_IQG20_APG40

Source Field

UDTSSENT

Source Section

C7SCQOS

WASSIGND

Number of successful MO WPS calls after successful TCH assignment.

Data Source

MSC_IQG20_APG40

Source Field

WASSIGND

Source Section

NSEPCALL

WINVOKED

Number of MO WPS call requests.

Data Source

MSC_IQG20_APG40

Source Field

WINVOKED

Source Section

NSEPCALL

XUDTREC

Counter for XUDT messages received from MTP

Data Source

MSC_IQG20_APG40

Source Field

XUDTREC

Source Section

C7SCQOS

XUDTSENT

Counter for XUDT messages sent to MTP

Data Source

MSC_IQG20_APG40

Source Field

XUDTSENT

Source Section

C7SCQOS

XUDTSREC

Counter for XUDTS messages received from MTP

Data Source

MSC_IQG20_APG40

Source Field

XUDTSREC

Source Section

C7SCQOS

XUDTSSENT

Counter for XUDTS messages sent to MTP

Data Source

MSC_I0G20_APG40

Source Field

XUDTSSENT

Source Section

C7SCQOS

MSC_SS7Dest Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7Dest entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

MSC_C7Dest Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC_SS7Dest Peg Counts

The following is a list of peg counts for the MSC_SS7Dest entity.

MSC_RELEASE

Release

MSGSEND

Counter for messages sent to a back-up node

Data Source

MSC_IQG20_APG40

Source Field

MSGSEND

Source Section

C7SCSIGP

PERLEN

Period Length

SYS7IND_MSC_C7SCSIGP

State

Data Source

MSC_IQG20_APG40

Source Field

SYS7IND

Source Section

C7SCSIGP

MSC_SS7HSLPrmGrp Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7HSLPrmGrp entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

MSC_SS7HSLPrmGrp Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Tech

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

MSC_SS7HSLPrmGrp Peg Counts

The following is a list of peg counts for the MSC_SS7HSLPrmGrp entity.

AERMM

AERM parameter M.

Data Source

MSC_IOG20_APG40

Source Field

AERMM

Source Section

SS7PRGRP

AERMN

AERM parameter N in octets.

Data Source

MSC_IOG20_APG40

Source Field

AERMN

Source Section

SS7PRGRP

AERMTIE

AERM parameter Tie.

Data Source

MSC_IOG20_APG40

Source Field

AERMTIE

Source Section

SS7PRGRP

AERMTIN

AERM parameter Tin.

Data Source

MSC_IQG20_APG40

Source Field

AERMTIN

Source Section

SS7PRGRP

ALPHA

A (alpha), exponential smoothing factor

Data Source

MSC_IQG20_APG40

Source Field

ALPHA

Source Section

SS7HSLPG1

CNGABTH1

Value of congestion abatement for level 1, CNGABTH1 = (number of octets in TR/RTB buffer when level 1 is reached / 1000)

Data Source

MSC_IQG20_APG40

Source Field

CNGABTH1

Source Section

SS7HSLPG2

CNGABTH2

Value of congestion abatement for level 2, CNGABTH2 = (number of octets in TR/RTB buffer when level 2 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGABTH2

Source Section

SS7HSLPG2

CNGABTH3

Value of congestion abatement for level 3, CNGABTH3 = (number of octets in TR/RTB buffer when level 3 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGABTH3

Source Section

SS7HSLPG2

CNGDITH1

Value of congestion discard for level 1, CNGDITH1 = (number of octets in TR/RTB buffer when level 1 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGDITH1

Source Section

SS7HSLPG2

CNGDITH2

Value of congestion discard for level 2, CNGDITH2 = (number of octets in TR/RTB buffer when level 2 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGDITH2

Source Section

SS7HSLPG2

CNGDITH3

Value of congestion discard for level 3, CNGDITH3 = (number of octets in TR/RTB buffer when level 3 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGDITH3

Source Section

SS7HSLPG2

CNGONTH1

Value of congestion onset for level 1, CNGONTH1 = (number of octets in TB/RTB buffer when level 1 is reached / 1000).

Data Source

MSC_IOG20_APG40

Source Field

CNGONTH1

Source Section

SS7HSLPG2

CNGONTH2

Value of congestion onset for level 2, CNGONTH2 = (number of octets in TB/RTB buffer when level 2 is reached / 1000).

Data Source

MSC_IOG20_APG40

Source Field

CNGONTH2

Source Section

SS7HSLPG2

CNGONTH3

Value of congestion onset for level 3, CNGONTH3 = (number of octets in TB/RTB buffer when level 3 is reached / 1000)

Data Source

MSC_IOG20_APG40

Source Field

CNGONTH3

Source Section

SS7HSLPG2

ERRCORR

correction method

Data Source

MSC_IOG20_APG40

Source Field

ERRCORR

Source Section

SS7PRGRP

HLR_RELEASE

MSC Release

LT1ALNRD

T1.111.3 T1 Timer, "aligned/ready" in 50 ms units.

Data Source

MSC_IOG20_APG40

Source Field

LT1ALNRD

Source Section

SS7PRGRP

LT1UNACK

Timer_CC, time between transmission of unacknowledged BGN, END, ER, or RS PDUs

Data Source

MSC_IOG20_APG40

Source Field

LT1UNACK

Source Section

SS7HSLPG1

LT2NOALN

T1.111.3 T2 Timer, "not aligned" in 50 ms units.

Data Source

MSC_IOG20_APG40

Source Field

LT2NOALN

Source Section

SS7PRGRP

LT3ALIND

T1.111.3 T3 Timer, "aligned" in 50 msunits.

Data Source

MSC_IQG20_APG40

Source Field

LT3ALIND

Source Section

SS7PRGRP

LT4EMGPV

T1.111.3 T4 Timer, emergency proving period timer in 50 ms units.

Data Source

MSC_IQG20_APG40

Source Field

LT4EMGPV

Source Section

SS7PRGRP

LT4NMLPV

T1.111.3 T4 Timer, normal proving period timer in 50 ms units.

Data Source

MSC_IQG20_APG40

Source Field

LT4NMLPV

Source Section

SS7PRGRP

LT5DSIB

T1.111.3 T5 Timer, "sending SIB" in 50 ms units.

Data Source

MSC_IQG20_APG40

Source Field

LT5DSIB

Source Section

SS7PRGRP

LT6RMCNG

T1.111.3 T6 Timer, "remotecongestion" in 50 ms units.

Data Source

MSC_IQG20_APG40

Source Field

LT6RMCNG

Source Section

SS7PRGRP

LT7XDLAK

T1.111.3 T7 Timer, "excessive delay of acknowledgement" in 50 ms units.

Data Source

MSC_IQG20_APG40

Source Field

LT7XDLAK

Source Section

SS7PRGRP

LTBLCKSZ

T_sup, superblock size

Data Source

MSC_IOG20_APG40

Source Field

LTBLCKSZ

Source Section

SS7HSLPG1

LTFORPRV

Timer_FORCE-PROVING, force proving

Data Source

MSC_IOG20_APG40

Source Field

LTFORPRV

Source Section

SS7HSLPG1

LTKPALIV

Timer_KEEP-ALIVE, "keep alive" for 3622 cells/sec signalling rate

Data Source

MSC_IOG20_APG40

Source Field

LTKPALIV

Source Section

SS7HSLPG1

LTMAXPDU

Timer_NO-RESPONSE, maximum time interval during which at least one STAT PDU must be received

Data Source

MSC_IOG20_APG40

Source Field

LTMAXPDU

Source Section

SS7HSLPG1

LTMXIDLE

Timer_IDLE, maximum time of the IDLE phase of an SSCOP connection

Data Source

MSC_IOG20_APG40

Source Field

LTMXIDLE

Source Section

SS7HSLPG1

LTNOCRED

Timer_NO-CREDIT, maximum interval without credit

Data Source

MSC_IOG20_APG40

Source Field

LTNOCRED

Source Section

SS7HSLPG1

LTPRVPDU

Timer_T3, time between proving PDUs in 1ms

Data Source

MSC_IOG20_APG40

Source Field

LTPRVPDU

Source Section

SS7HSLPG1

LTPULLRT

Timer_POLL, "Poll" for 3622 cells/sec signalling rate

Data Source

MSC_IOG20_APG40

Source Field

LTPULLRT

Source Section

SS7HSLPG1

LTSCCFAL

Timer_T2, time SSCF will attempt alignment

Data Source

MSC_IOG20_APG40

Source Field

LTSCCFAL

Source Section

SS7HSLPG1

LTSCCOPR

Timer_REPEAT-SREC, minimum interval between reports of an SSCOP recovery

Data Source

MSC_IOG20_APG40

Source Field

LTSCCOPR

Source Section

SS7HSLPG1

LTSETALG

Timer_T1, time between link release and re-establishment during alignment

Data Source

MSC_IOG20_APG40

Source Field

LTSETALG

Source Section

SS7HSLPG1

LTSTATLS

T_loss, STAT loss limit

Data Source

MSC_IOG20_APG40

Source Field

LTSTATLS

Source Section

SS7HSLPG1

LTTAUERR

T (tau), error monitoring interval

Data Source

MSC_IOG20_APG40

Source Field

LTtauerr

Source Section

SS7HSLPG1

MONEREVT

N, Monitoring intervals after 400ms error event

Data Source

MSC_Iog20_APG40

Source Field

MONEREVT

Source Section

SS7HSLPG1

MONINTER

N_blk, monitoring intervals per block

Data Source

MSC_Iog20_APG40

Source Field

MONINTER

Source Section

SS7HSLPG1

NMXSDPDU

MaxPD, maximum number of SD PDUs sent between POLL PDUs

Data Source

MSC_Iog20_APG40

Source Field

NMXSDPDU

Source Section

SS7HSLPG1

NMXSTPDU

MaxSTAT, maximum number of list elements in a STAT PDU

Data Source

MSC_IQG20_APG40

Source Field

NMXSTPDU

Source Section

SS7HSLPG1

NMXUNACK

MaxCC, maximum number of unacknowledged BGN, END, ER, or RS PDUs

Data Source

MSC_IQG20_APG40

Source Field

NMXUNACK

Source Section

SS7HSLPG1

NT17REAL

T1.111.4 T17 Timer, "delay to avoid oscillation of initial alignment failure and link restart" in ms.

Data Source

MSC_IQG20_APG40

Source Field

NT17REAL

Source Section

SS7PRGRP

PCRN2

Number of octets in TB and RTB before forced retransmission is ordered-64 -1. Valid only when ERRCORR = 2.

Data Source

MSC_IOG20_APG40

Source Field

PCRN2

Source Section

SS7PRGRP

PDUSENTP

N1, PDUs sent during normal proving

Data Source

MSC_IOG20_APG40

Source Field

PDUSENTP

Source Section

SS7HSLPG1

PERLEN

Period Length

SCCOPPDU

Max_NRP, maximum number of retransmitted SSCOP PDUs permissible for link proving

Data Source

MSC_IOG20_APG40

Source Field

SCCOPPDU

Source Section

SS7HSLPG1

SUERMD

SUERMD parameter D in signal units/4.

Data Source

MSC_IQG20_APG40

Source Field

SUERMD

Source Section

SS7PRGRP

SUERMT

SUERMD parameter T.

Data Source

MSC_IQG20_APG40

Source Field

SUERMT

Source Section

SS7PRGRP

TAS

T1.111.7 T1 Timer, "signalling linktest message acknowledgementsupervision" in sec.

Data Source

MSC_IQG20_APG40

Source Field

TAS

Source Section

SS7PRGRP

THRSRUNQ

Thres, threshold for comparing the running Quality of Service

Data Source

MSC_IQG20_APG40

Source Field

THRSRUNQ

Source Section

SS7HSLPG1

TTS

Signalling link test procedure period in sec.

Data Source

MSC_IQG20_APG40

Source Field

TTS

Source Section

SS7PRGRP

MSC_SS7Link Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7Link entity.

C7_SLTL_DiffRX

% C7 Link RX Traffic (Erlangs) Difference from Mean

Calculation

$$\frac{(C7_SLTL_RX - MSC_SS7LinkSet.C7_LSTL_AvgRX) * 100.0}{MSC_SS7LinkSet.C7_LSTL_AvgRX}$$

C7_SLTL_DiffTX

% C7 Link TX Traffic (Erlangs) Difference from Mean

Calculation

```
(C7_SLTL_TX - MSC_SS7LinkSet.C7_LSTL_AvgTX) * 100.0 /  
MSC_SS7LinkSet.C7_LSTL_AvgTX
```

C7_SLTL_RX

C7 Link Received Traffic (Erlangs)

Calculation

```
(8 * vsum(nullValue(NSIFSRE, RECVDOCT_MSC_C7Link), (6 *  
nullValue(NMSURE_C7SL1, MSURECD_MSC_C7Link))) / (1.0 * ((PERLEN * 60.0) *  
64000)))
```

C7_SLTL_TX

C7 Link Transmitted Traffic (Erlangs)

Calculation

```
(8 * vsum(nullValue(NSIFTR, TRANOCT_MSC_C7Link), (6 *  
nullValue(NMSUTR_C7SL1, MSUTRAN_MSC_C7Link))) / (1.0 * ((PERLEN * 60.0) *  
64000)))
```

DataRate

Number of MSU received and Transmitted

Calculation

```
64000
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

```
""
```

InterconnectTraffReciev

No. Of recived SIF and SIO octets per second

Calculation

```
(vsum((NSIFSRE * PERLEN * 100.0 / 8), -1.0 * 6 * PERLEN * NMSURE_C7SL1)) /  
PERLEN
```

InterconnectTraffTrans

No. Of transmitted SIF and SIO octets per second

Calculation

```
(vsum( (NSIFTR * PERLEN * 100.0 / 8), -1.0 * 6 * PERLEN * NMSUTR_C7SL1)) /  
PERLEN
```

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

INTERVALS_C7TM

Number of 60 minute intervals covered (from C7TMFILE data)

Calculation

```
PERLEN_C7TM / (1.0 * 60)
```

Link_Usage

Sum of TX and RX Usage

Calculation

```
vsum(( 8.0 * ( vsum( NSIFTR, 6.0 * NMSUTR )) / ( 3600.0 * DataRate )), vsum(  
NSIFSRE, 6.0 * NMSURE ) / ( 3600.0 * DataRate ))
```

MSUS

Number of MSU received and Transmitted

Calculation

```
vsum( NMSUTR, NMSURE )
```

NMSURE

Number of MSU's received

Calculation

```
nullValue(NMSURE_C7SL1, NMSURE_ASC_CCITT7)
```

NMSUTR

Number of MSU's transmitted

Calculation

nullValue(NMSUTR_C7SL1, NMSUTR_ASC_CCITT7)

NumberMSUsReceived

Number of MSU's received

Calculation

nullValue(NMSURE_C7SL1, MSURECD_MSC_C7Link)

NumberMSUsTransmitted

Number of MSU's transmitted

Calculation

nullValue(NMSUTR_C7SL1, MSUTRAN_MSC_C7Link)

NumberSIFandSIOOctetsReceived

Number of SIF and SIO octets received

Calculation

nullValue(NSIFSRE, RECVD OCT_MSC_C7Link)

NumberSIFandSIOOctetsTransmitted

Number of SIF and SIO octets transmitted

Calculation

nullValue(NSIFTR, TRANOCT_MSC_C7Link)

NumberSLFailures

Number of SL failures, all reasons

Calculation

nullValue(NSLFA, NMDCLFLR)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

PercentageLinkAvailability

Percentage Link Availability

Calculation

```
nullValue(ASLDUR, TLNKACTV * 10) * 100.0 / (PERLEN * 60)
```

PercentageLocalBusy

Percentage Local Busy

Calculation

```
((100 * LBSDUR / 10.0) / (1.0 * (PERLEN * 60)))
```

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

MSC_SS7Link Peg Counts

The following is a list of peg counts for the MSC_SS7Link entity.

ACHGOVRS

Number of automatic changeovers

Data Source

MSC_I0G20_APG40

Source Field

ACHGOVRS

Source Section

SS7SLMT2

ACHGOVRS_SS7HSLMT2

Number of automatic changeovers

Data Source

MSC_IQG20_APG40

Source Field

ACHGOVRS

Source Section

SS7HSLMT2

ALGNFLRS_SS7HSLMT2

Signalling link alignment failures

Data Source

MSC_IQG20_APG40

Source Field

ALGNFLRS

Source Section

SS7HSLMT2

ASLDUR

Duration of link in In-Service state in seconds.

Data Source

MSC_IQG20_APG40

Source Field

ASLDUR

Source Section

C7SL1

CDISCONX_SS7HSLMT3

Number of abnormal occurrences of SSCOP Connection Disconnect

Data Source

MSC_IQG20_APG40

Source Field

CDISCONX

Source Section

SS7HSLMT3

CGSTEVL_SS7HSLMT1

Current link transmit congestion level

Data Source

MSC_IOG20_APG40

Source Field

CGSTEVL

Source Section

SS7HSLMT1

CGSTLEVL

Current Link Transmit Congestion Level

Data Source

MSC_IOG20_APG40

Source Field

CGSTLEVL

Source Section

SS7SLMT1

CGSTSTAT

Current Link Transmit Congestion State

Data Source

MSC_IOG20_APG40

Source Field

CGSTSTAT

Source Section

SS7SLMT1

CGSTSTAT_SS7HSLMT1

Current link transmit congestion state

Data Source

MSC_IQG20_APG40

Source Field

CGSTSTAT

Source Section

SS7HSLMT1

CHOVERS

Number of occurrences of local automatic changeover

Data Source

MSC_IQG20_APG40

Source Field

CHOVERS

Source Section

C7SL1

CLUSTERCODE_MSC_SS7SLMT1

SS7 Link Cluster code

Data Source

MSC_IQG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLMT1

CLUSTERCODE_MSC_SS7SLMT2

SS7 Link Cluster code

Data Source

MSC_IOG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLMT2

CLUSTERCODE_MSC_SS7SLTRAFF

SS7 Link Cluster code

Data Source

MSC_IOG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7SLTRAFF

CNRECONX_SS7HSLMT3

Number of SSCOP Connection Reestablishment/Resynchronizations

Data Source

MSC_IOG20_APG40

Source Field

CNRECONX

Source Section

SS7HSLMT3

CNSUMERS_SS7HSLMT3

A SSCOP Connection sum of errors counter. That is the sum of CDISCONX and INITFLRS

Data Source

MSC_IOG20_APG40

Source Field

CNSUMERS

Source Section

SS7HSLMT3

CONCNT1

Number of occurrences of SL congestion indications level 1

Data Source

MSC_IOG20_APG40

Source Field

CONCNT1

Source Section

C7SL2

CONCNT2

Number of occurrences of SL congestion indications level 2

Data Source

MSC_IOG20_APG40

Source Field

CONCNT2

Source Section

C7SL2

CONCNT3

Number of occurrences of SL congestion indications level 3

Data Source

MSC_IOG20_APG40

Source Field

CONCNT3

Source Section

C7SL2

CONDUR1

Cumulative duration of SL congestion level 1 in seconds

Data Source

MSC_IOG20_APG40

Source Field

CONDUR1

Source Section

C7SL2

CONDUR2

Cumulative duration of SL congestion level 2 in seconds

Data Source

MSC_IOG20_APG40

Source Field

CONDUR2

Source Section

C7SL2

CONDUR3

Cumulative duration of SL congestion level 3 in seconds

Data Source

MSC_IOG20_APG40

Source Field

CONDUR3

Source Section

C7SL2

CONSTOP1

Number of indications of stop of SL congestion level 1

Data Source

MSC_IQG20_APG40

Source Field

CONSTOP1

Source Section

C7SL2

CONSTOP2

Number of indications of stop of SL congestion level 2

Data Source

MSC_IQG20_APG40

Source Field

CONSTOP2

Source Section

C7SL2

CONSTOP3

Number of indications of stop of SL congestion level 3

Data Source

MSC_IQG20_APG40

Source Field

CONSTOP3

Source Section

C7SL2

DCLRFAIL

Indication of Link Declared Failure State

Data Source

MSC_IQG20_APG40

Source Field

DCLRFAIL

Source Section

SS7SLMT1

DCLRFAIL_SS7HSLMT1

Indication of link declared failure state

Data Source

MSC_IQG20_APG40

Source Field

DCLRFAIL

Source Section

SS7HSLMT1

DCONG

Cumulative duration of SL congestion (in s).

Data Source

MSC_C7TMFILE

Source Field

DCONG

Source Section

ASC_CCITT7

DDCFLABN

Duration of SL declared failures due to abnormal FIBR/BNSR in 10 sec. Units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLABN

Source Section

SS7SLMT2

DDCFLHWP

Duration of SL declared failures due to due to hardware problems in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLHWP

Source Section

SS7SLMT2

DDCFLHWP_SS7HSLMT2

Duration of signalling link declared failures due to hardware problems in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLHWP

Source Section

SS7HSLMT2

DDCFLXDA

Duration of SL declared failures due to excessive delay of acknowledgement in 10 sec. Units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLXDA

Source Section

SS7SLMT2

DDCFLXDA_SS7HSLMT2

Duration of signalling link declared failures due to excessive delay of acknowledgement in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLXDA

Source Section

SS7HSLMT2

DDCFLXDC

Duration of SL declared failures due to excessive duration of congestion

Data Source

MSC_IOG20_APG40

Source Field

DDCFLXDC

Source Section

SS7SLMT2

DDCFLXDC_SS7HSLMT2

Duration of signalling link declared failures due to excessive duration of congestion in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

DDCFLXDC

Source Section

SS7HSLMT2

DDCFLXER

Duration of SL declared failures due to excessive error rate in 10 sec. units

Data Source

MSC_IQG20_APG40

Source Field

DDCFLXER

Source Section

SS7SLMT2

DDCFLXER_SS7HSLMT2

Duration of signalling link declared failures due to excessive error rate in 10 sec units

Data Source

MSC_IQG20_APG40

Source Field

DDCFLXER

Source Section

SS7HSLMT2

DISMES1

Number of messages discarded due to SL congestion on level 1.

Data Source

MSC_IQG20_APG40

Source Field

DISMES1

Source Section

SS7HSLMT3

DISMES2

Number of messages discarded due to SL congestion on level 2.

Data Source

MSC_IQG20_APG40

Source Field

DISMES2

Source Section

SS7HSLMT3

DISMES3

Number of messages discarded due to SL congestion on level 3.

Data Source

MSC_IQG20_APG40

Source Field

DISMES3

Source Section

SS7HSLMT3

DISMSU1

Number of occurrences of MSUs discarded due to SL congestion level 1

Data Source

MSC_IQG20_APG40

Source Field

DISMSU1

Source Section

C7SL2

DISMSU2

Number of occurrences of MSUs discarded due to SL congestion level 2

Data Source

MSC_IOG20_APG40

Source Field

DISMSU2

Source Section

C7SL2

DISMSU3

Number of occurrences of MSUs discarded due to SL congestion level 3

Data Source

MSC_IOG20_APG40

Source Field

DISMSU3

Source Section

C7SL2

DRBSYDCL

Duration of link busy status declared by near-end signaling terminal in 50 ms. units

Data Source

MSC_IOG20_APG40

Source Field

DRBSYDCL

Source Section

SS7SLMT1

DRBSYDCL_SS7HSLMT1

Duration of link busy status declared by near-end signalling terminal in 50 ms units

Data Source

MSC_IOG20_APG40

Source Field

DRBSYDCL

Source Section

SS7HSLMT1

DRBSYRCD

Duration of busy-link status unit received from far-end in 50 ms. units

Data Source

MSC_IOG20_APG40

Source Field

DRBSYRCD

Source Section

SS7SLMT1

DRDCLFLR

Duration of SL declared failures, - All types in 10 sec. Units

Data Source

MSC_IOG20_APG40

Source Field

DRDCLFLR

Source Section

SS7SLMT2

DRDCLFLR_SS7HSLMT2

Duration of signalling link declared failures, all types, in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

DRDCLFLR

Source Section

SS7HSLMT2

DRFEPRO

Duration of far-end processor outage in 10 sec. units

Data Source

MSC_IQG20_APG40

Source Field

DRFEPRO

Source Section

SS7SLMT1

DRFEPRO_SS7HSLMT1

Duration of Far-end Processor Outage in 10 second units

Data Source

MSC_IQG20_APG40

Source Field

DRFEPRO

Source Section

SS7HSLMT1

DRLCLPRO

Duration of near-end processor outage in 10 sec. units

Data Source

MSC_IQG20_APG40

Source Field

DRLCLPRO

Source Section

SS7SLMT2

DRLCLPRO_SS7HSLMT2

Duration of near-end processor outage in 10 second units

Data Source

MSC_IQG20_APG40

Source Field

DRLCLPRO

Source Section

SS7HSLMT2

DRLKFAIL

Duration of SL failures (declared and undeclared) in 10 sec. units.

Data Source

MSC_IQG20_APG40

Source Field

DRLKFAIL

Source Section

SS7SLMT2

DRLKINHB

Duration of signalling link management inhibits in 10 sec. units

Data Source

MSC_IQG20_APG40

Source Field

DRLKINHB

Source Section

SS7SLMT2

DRLKINHB_SS7HSLMT2

Duration of signalling link management inhibits in 10 sec units

Data Source

MSC_IQG20_APG40

Source Field

DRLKINHB

Source Section

SS7HSLMT2

DRNOCRED_SS7HSLMT3

Cumulative duration of time in seconds

Data Source

MSC_IQG20_APG40

Source Field

DRNOCRED

Source Section

SS7HSLMT3

DUNAV

Duration of SL Not-In-Service (in seconds).

Data Source

MSC_C7TMFILE

Source Field

DUNAV

Source Section

ASC_CCITT7

ECCNGLV1

Number of times SL enters level 1 congestion state

Data Source

MSC_IOG20_APG40

Source Field

ECCNGLV1

Source Section

SS7SLMT1

ECCNGLV1_SS7HSLMT1

Number of times a signalling link enters level 1 congestion state

Data Source

MSC_IOG20_APG40

Source Field

ECCNGLV1

Source Section

SS7HSLMT1

ECCNGLV2

Number of times SL enters level 2 congestion state

Data Source

MSC_IOG20_APG40

Source Field

ECCNGLV2

Source Section

SS7SLMT1

ECCNGLV2_SS7HSLMT1

Number of times a signalling link enters level 2 congestion state

Data Source

MSC_IOG20_APG40

Source Field

ECCNGLV2

Source Section

SS7HSLMT1

ECCNGLV3

Number of times SL enters level 3 congestion state

Data Source

MSC_IQG20_APG40

Source Field

ECCNGLV3

Source Section

SS7SLMT1

ECCNGLV3_SS7HSLMT1

Number of times a signalling link enters level 3 congestion state

Data Source

MSC_IQG20_APG40

Source Field

ECCNGLV3

Source Section

SS7HSLMT1

ERRSEC

Number of errored seconds

Data Source

MSC_IQG20_APG40

Source Field

ERRSEC

Source Section

SS7SLTRAFF

ERRSEC_SS7HSLTRAF

Number of errored seconds for SAAL, ATM and Physical layers

Data Source

MSC_IQG20_APG40

Source Field

ERRSEC

Source Section

SS7HSLTRAF

FARMGINH

Number of far-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

FARMGINH

Source Section

SS7SLMT2

FARMGINH_SS7HSLMT2

Number of far-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

FARMGINH

Source Section

SS7HSLMT2

HDRDSCDS_SS7HSLMT3

Number of incoming ATM cells discarded due to protocol (ATM-layer Header) errors

Data Source

MSC_IOG20_APG40

Source Field

HDRDSCDS

Source Section

SS7HSLMT3

HECDSCDS_SS7HSLMT3

Number of incoming ATM cells discarded due to Header Error Control (HEC) violations

Data Source

MSC_IOG20_APG40

Source Field

HECDSCDS

Source Section

SS7HSLMT3

ICUICELS_SS7HSLTRAF

Number of incoming (received) ATM user-information (UI) cells

Data Source

MSC_IOG20_APG40

Source Field

ICUICELS

Source Section

SS7HSLTRAF

ILS_MSC_SS7SLMT1

Link Set Pointer

Data Source

MSC_IOG20_APG40

Source Field

ILS

Source Section

SS7SLMT1

ILS_MSC_SS7SLTRAFF

Link Set Pointer

Data Source

MSC_IOG20_APG40

Source Field

ILS

Source Section

SS7SLTRAFF

INCCELLS_SS7HSLTRAF

Number of incoming (received) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

INCCELLS

Source Section

SS7HSLTRAF

INITFLRS_SS7HSLMT3

Number of SSCOP Connection Initiation Failures

Data Source

MSC_IOG20_APG40

Source Field

INITFLRS

Source Section

SS7HSLMT3

INVLPDUS_SS7HSLMT3

Number of invalid SSCOP PDUs received

Data Source

MSC_IQG20_APG40

Source Field

INVLPDUS

Source Section

SS7HSLMT3

LACKCRED_SS7HSLMT3

Number of times that SSCOP had PDUs to send to its peer but could not do so because it was not given credit by the far end

Data Source

MSC_IQG20_APG40

Source Field

LACKCRED

Source Section

SS7HSLMT3

LBUSDUR

Duration of local busy in 100ms units

Data Source

MSC_IQG20_APG40

Source Field

LBUSDUR

Source Section

C7SL1

LINHNO

Number of occurrences of local management inhibit

Data Source

MSC_IOG20_APG40

Source Field

LINHNO

Source Section

C7SL1

LKMT CST

Maintenance state (same as 'signalling link service status')

Data Source

MSC_IOG20_APG40

Source Field

LKMT CST

Source Section

SS7SLMT1

LKMT CST_SS7HSLMT1

Maintenance state (same as 'signalling link service status')

Data Source

MSC_IOG20_APG40

Source Field

LKMT CST

Source Section

SS7HSLMT1

LOCINHDUR

Duration of SL inhibition due to local management action in seconds

Data Source

MSC_IQG20_APG40

Source Field

LOCINHDUR

Source Section

C7SL1

LOFMSU1

Number of congestion events resulting in loss of MSUs level 1

Data Source

MSC_IQG20_APG40

Source Field

LOFMSU1

Source Section

C7SL2

LOFMSU2

Number of congestion events resulting in loss of MSUs level 2

Data Source

MSC_IQG20_APG40

Source Field

LOFMSU2

Source Section

C7SL2

LOFMSU3

Number of congestion events resulting in loss of MSUs level 3

Data Source

MSC_IOG20_APG40

Source Field

LOFMSU3

Source Section

C7SL2

LS10SCAN

Number of 10 second scans in S7LS

Data Source

MSC_IOG20_APG40

Source Field

LS10SCAN

Source Section

SS7SLMT2

LS10SCAN_SS7HSLMT2

Number of 10 sec scans in S7LS

Data Source

MSC_IOG20_APG40

Source Field

LS10SCAN

Source Section

SS7HSLMT2

LSID

C7 Linkset ID

Data Source

MSC_C7TMFILE

Source Field

LSID

Source Section

ASC_CCITT7

MCHGOVRS

Number of near-end manual changeovers

Data Source

MSC_IQG20_APG40

Source Field

MCHGOVRS

Source Section

SS7SLMT2

MCHGOVRS_SS7HSLMT2

Number of near-end manual changeovers

Data Source

MSC_IQG20_APG40

Source Field

MCHGOVRS

Source Section

SS7HSLMT2

MEMBERCODE_MSC_SS7SLMT1

SS7 Cluster Member Code

Data Source

MSC_IQG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLMT1

MEMBERCODE_MSC_SS7SLMT2

SS7 Cluster Member Code

Data Source

MSC_IQG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLMT2

MEMBERCODE_MSC_SS7SLTRAFF

SS7 Cluster Member Code

Data Source

MSC_IQG20_APG40

Source Field

MEMBERCODE

Source Section

SS7SLTRAFF

MGMTINHB

Indication of Link Management-Inhibit

Data Source

MSC_IQG20_APG40

Source Field

MGMTINHB

Source Section

SS7SLMT1

MGMTINHB_SS7HSLMT1

Indication of link management-inhibit status

Data Source

MSC_IQG20_AP40

Source Field

MGMTINHB

Source Section

SS7HSLMT1

MOCTRGTT_SS7HSLTRAF

Number of MTP3 message octets associated with MTP3 messages received that required GTT

Data Source

MSC_IQG20_AP40

Source Field

MOCTRGTT

Source Section

SS7HSLTRAF

MSC_RELEASE

Release

MSGDISC0_SS7HSLMT1

Number of priority 0 MTP3 messages discarded due to signalling link congestion

Data Source

MSC_IQG20_AP40

Source Field

MSGDISC0

Source Section

SS7HSLMT1

MSGDISC1_SS7HSLMT1

Number of priority 1 MTP3 messages discarded due to signalling link congestion

Data Source

MSC_IOG20_APG40

Source Field

MSGDISC1

Source Section

SS7HSLMT1

MSGDISC2_SS7HSLMT1

Number of priority 2 MTP3 messages discarded due to signalling link congestion

Data Source

MSC_IOG20_APG40

Source Field

MSGDISC2

Source Section

SS7HSLMT1

MSGDISC3_SS7HSLMT1

Number of priority 3 MTP3 messages discarded due to signalling link congestion

Data Source

MSC_IOG20_APG40

Source Field

MSGDISC3

Source Section

SS7HSLMT1

MSGDISCH_SS7HSLMT1

Number of MTP3 messages discarded due to message length longer than 272 octets

Data Source

MSC_IOG20_APG40

Source Field

MSGDISCH

Source Section

SS7HSLMT1

MSGSRCVD_SS7HSLTRAF

Number of MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

MSGSRCVD

Source Section

SS7HSLTRAF

MSGSRGTT_SS7HSLTRAF

Number of MTP3 messages received requiring Global Title Translation (GTT)

Data Source

MSC_IOG20_APG40

Source Field

MSGSRGTT

Source Section

SS7HSLTRAF

MSGSTRAN_SS7HSLTRAF

Number of MTP3 messages transmitted

Data Source

MSC_IOG20_APG40

Source Field

MSGSTRAN

Source Section

SS7HSLTRAF

MSUDISC0

Number of priority 0 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC0

Source Section

SS7SLMT1

MSUDISC1

Number of priority 1 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC1

Source Section

SS7SLMT1

MSUDISC2

Number of priority 2 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC2

Source Section

SS7SLMT1

MSUDISC3

Number of priority 3 MSUs discarded due to SL congestion

Data Source

MSC_IOG20_APG40

Source Field

MSUDISC3

Source Section

SS7SLMT1

MSURCERR

Number of MSUs received in error

Data Source

MSC_IOG20_APG40

Source Field

MSURCERR

Source Section

SS7SLTRAFF

MSURECD_MSC_C7Link

Number of MSU's received

Data Source

MSC_IOG20_APG40

Source Field

MSURECD

Source Section

SS7SLTRAFF

MSURETRN_MSC_C7Link

Number of MSUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

MSURETRN

Source Section

SS7SLTRAFF

MSUSRGTT

MSUs received requiring GTT

Data Source

MSC_IQG20_APG40

Source Field

MSUSRGTT

Source Section

SS7SLTRAFF

MSUTRAN_MSC_C7Link

Number of MSU's transmitted, (retransmission not included)

Data Source

MSC_IQG20_APG40

Source Field

MSUTRAN

Source Section

SS7SLTRAFF

MTCEUSG

Link maintenance usage in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

MTCEUSG

Source Section

SS7SLMT1

MTCEUSG_SS7HSLMT1

Link maintenance usage in 10 second units

Data Source

MSC_IOG20_APG40

Source Field

MTCEUSG

Source Section

SS7HSLMT1

N10SCAN_MSC_C7Link

Number of ten second scannings

Data Source

MSC_IOG20_APG40

Source Field

N10SCAN

Source Section

SS7SLMT1

N10SCAN_SS7HSLMT1

Number of 10 sec scans.

Data Source

MSC_IOG20_APG40

Source Field

N10SCAN

Source Section

SS7HSLMT1

NDCFLABN

Number of SL declared failures abnormal FIBR/BNSR

Data Source

MSC_IOG20_APG40

Source Field

NDCFLABN

Source Section

SS7SLMT2

NDCFLHWP

Number of SL declared failures due to hardware problems

Data Source

MSC_IOG20_APG40

Source Field

NDCFLHWP

Source Section

SS7SLMT2

NDCFLHWP_SS7HSLMT2

Number of signalling link declared failures due to hardware problems

Data Source

MSC_IOG20_APG40

Source Field

NDCFLHWP

Source Section

SS7HSLMT2

NDCFLXDA

Number of SL declared failures due to excessive delay of acknowledgement

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDA

Source Section

SS7SLMT2

NDCFLXDA_SS7HSLMT2

Number of signalling link declared failures due to excessive delay of acknowledgement

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDA

Source Section

SS7HSLMT2

NDCFLXDC

Number of SL declared failures due to excessive duration of congestion

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDC

Source Section

SS7SLMT2

NDCFLXDC_SS7HSLMT2

Number of signalling link declared failures due to excessive duration of congestion

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXDC

Source Section

SS7HSLMT2

NDCFLXER

Number of SL declared failures due to excessive error rate

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXER

Source Section

SS7SLMT2

NDCFLXER_SS7HSLMT2

Number of signalling link declared failures due to excessive error rate

Data Source

MSC_IQG20_APG40

Source Field

NDCFLXER

Source Section

SS7HSLMT2

NDISC

Number of MSUs discarded due to SL congestion.

Data Source

MSC_C7TMFILE

Source Field

NDISC

Source Section

ASC_CCITT7

NEARMGIH

Number of near-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

NEARMGIH

Source Section

SS7SLMT2

NEARMGIH_SS7HSLMT2

Number of near-end management inhibits

Data Source

MSC_IQG20_APG40

Source Field

NEARMGIH

Source Section

SS7HSLMT2

NEGACKS

Number of negative acknowledgments received

Data Source

MSC_IOG20_APG40

Source Field

NEGACKS

Source Section

SS7SLTRAFF

NLOSS

Number of congestion events resulting in loss of MSUs.

Data Source

MSC_C7TMFILE

Source Field

NLOSS

Source Section

ASC_CCITT7

NMDCLFLR

Number of SL declared failures,- All types

Data Source

MSC_IOG20_APG40

Source Field

NMDCLFLR

Source Section

SS7SLMT2

NMDCLFLR_SS7HSLMT2

Number of signalling link declared failures, all types

Data Source

MSC_IOG20_APG40

Source Field

NMDCLFLR

Source Section

SS7HSLMT2

NMSURE_ASC_CCITT7

Number of MSUs received.

Data Source

MSC_C7TMFILE

Source Field

NMSURE

Source Section

ASC_CCITT7

NMSURE_C7SL1

Number of MSU's received

Data Source

MSC_IQG20_APG40

Source Field

NMSURE

Source Section

C7SL1

NMSUTR_ASC_CCITT7

Number of MSUs transmitted.

Data Source

MSC_C7TMFILE

Source Field

NMSUTR

Source Section

ASC_CCITT7

NMSUTR_C7SL1

Number of MSU's transmitted

Data Source

MSC_IQG20_APG40

Source Field

NMSUTR

Source Section

C7SL1

NNAREC

Number of negative acknowledgements received

Data Source

MSC_IQG20_APG40

Source Field

NNAREC

Source Section

C7SL1

NOCTRE

Number of SIF and SIO octets received.

Data Source

MSC_C7TMFILE

Source Field

NOCTRE

Source Section

ASC_CCITT7

NOCTRTR

Number of octets retransmitted.

Data Source

MSC_C7TMFILE

Source Field

NOCTRTR

Source Section

ASC_CCITT7

NOCTTR

Number of SIF and SIO octets transmitted.

Data Source

MSC_C7TMFILE

Source Field

NOCTTR

Source Section

ASC_CCITT7

NORTRO

Number of octets retransmitted

Data Source

MSC_IQG20_APG40

Source Field

NORTRO

Source Section

C7SL1

NSIFSRE

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

NSIFSRE

Source Section

C7SL1

NSIFTR

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

NSIFTR

Source Section

C7SL1

NSLALPRFL

Number of occurrences of SL Alignment or Proving failure.

Data Source

MSC_IOG20_APG40

Source Field

NSLALPRFL

Source Section

C7SL1

NSLCO

Number of SL congestion indications.

Data Source

MSC_C7TMFILE

Source Field

NSLCO

Source Section

ASC_CCITT7

NSLFA

Number of SL failures, all reasons.

Data Source

MSC_C7TMFILE

Source Field

NSLFA

Source Section

ASC_CCITT7

NSUERR

Number of signal units in error

Data Source

MSC_IQG20_APG40

Source Field

NSUERR

Source Section

C7SL1

OCDANMLS_SS7HSLMT3

Number of time of Out of Cell Delineation (OCD) anomalies

Data Source

MSC_IQG20_APG40

Source Field

OCDANMLS

Source Section

SS7HSLMT3

OCTRCGTT

MSU octets received for messages requiring GTT

Data Source

MSC_IQG20_APG40

Source Field

OCTRCGTT

Source Section

SS7SLTRAFF

OGUICELS_SS7HSLTRAF

Number of outgoing (transmitted) ATM user-information (UI) cells

Data Source

MSC_IQG20_APG40

Source Field

OGUICELS

Source Section

SS7HSLTRAF

OUTCELLS_SS7HSLTRAF

Number of outgoing (transmitted) NDC-valid ATM cells

Data Source

MSC_IQG20_APG40

Source Field

OUTCELLS

Source Section

SS7HSLTRAF

PDULSTER_SS7HSLMT3

Number of SSCOP PDUs with List Element Errors

Data Source

MSC_IOG20_APG40

Source Field

PDULSTER

Source Section

SS7HSLMT3

PDUOCTRC_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTRC

Source Section

SS7HSLTRAF

PDUOCTTR_SS7HSLTRAF

Number of SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTTR

Source Section

SS7HSLTRAF

PDUSRCVD_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs retransmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUSRCVD

Source Section

SS7HSLTRAF

PDUSTRAN_SS7HSLTRAF

Number of octets associated with SSCOP SD PDUs transmitted, including retransmissions

Data Source

MSC_IOG20_APG40

Source Field

PDUSTRAN

Source Section

SS7HSLTRAF

PDUSUMER_SS7HSLMT3

A SSCOP Errored PDUs sum of errors counter. That is a sum of UNEXPDUS, INVLPDUS and PDULSTER

Data Source

MSC_IOG20_APG40

Source Field

PDUSUMER

Source Section

SS7HSLMT3

PERLEN

Period Length

PERLEN_C7TM

Period Length (of C7TMFILE data)

PROSTAT

Indication of processor outage status units being received

Data Source

MSC_IQG20_APG40

Source Field

PROSTAT

Source Section

SS7SLMT1

PROTRAN

Indication of processor outage status units being transmitted

Data Source

MSC_IQG20_APG40

Source Field

PROTRAN

Source Section

SS7SLMT2

RECVDOCT_MSC_C7Link

Number of SIF and SIO octets received

Data Source

MSC_IQG20_APG40

Source Field

RECVDOCT

Source Section

SS7SLTRAFF

RECVDOCT_SS7HSLTRAF

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7HSLTRAF

REMINHDUR

Duration of SL inhibition due to remote management action in seconds

Data Source

MSC_IOG20_APG40

Source Field

REMINHDUR

Source Section

C7SL1

RETRNOCT_MSC_C7Link

Number of SIF, SIO, LI, FSN, and BSN octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

RETRNOCT

Source Section

SS7SLTRAFF

RINHNO

Number of occurrences of local management uninhibit

Data Source

MSC_IOG20_APG40

Source Field

RINHNO

Source Section

C7SL1

SAALINSV_SS7HSLMT3

Total time in seconds that the link is regarded in-service (at level 2) by SAAL

Data Source

MSC_IOG20_APG40

Source Field

SAALINSV

Source Section

SS7HSLMT3

SAMPCNT

Number of samples from signalling terminal

Data Source

MSC_IOG20_APG40

Source Field

SAMPCNT

Source Section

SS7SLMT1

SAMPCNT_SS7HSLMT1

Number of samples from signalling terminal

Data Source

MSC_IOG20_APG40

Source Field

SAMPCNT

Source Section

SS7HSLMT1

SCANSEC_ASC_CCITT7

Measurement duration in seconds.

Data Source

MSC_C7TMFILE

Source Field

SCANSEC

Source Section

ASC_CCITT7

SDOCTRCV_SS7HSLTRAF

Number of SSCOP Sequence Data (SD) PDUs transmitted, including retransmissions

Data Source

MSC_IQG20_APG40

Source Field

SDOCTRCV

Source Section

SS7HSLTRAF

SDOCTRTR_SS7HSLTRAF

Number of octets associated with SSCOP PDUs of all types transmitted

Data Source

MSC_IQG20_APG40

Source Field

SDOCTRTR

Source Section

SS7HSLTRAF

SDOCTTRN_SS7HSLTRAF

Number of SSCOP PDUs of all types received

Data Source

MSC_IQG20_APG40

Source Field

SDOCTTRN

Source Section

SS7HSLTRAF

SDPDURCV_SS7HSLTRAF

Number of octets associated with SSCOP PDUs of all types received

Data Source

MSC_IQG20_APG40

Source Field

SDPDURCV

Source Section

SS7HSLTRAF

SDPDURRR_SS7HSLTRAF

Number of SSCOP SD PDUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

SDPDURRR

Source Section

SS7HSLTRAF

SDPDURTR_SS7HSLTRAF

Number of SSCOP PDUs of all types transmitted

Data Source

MSC_IOG20_APG40

Source Field

SDPDURTR

Source Section

SS7HSLTRAF

SDPDUTRN_SS7HSLTRAF

Number of SSCOP SD PDU transmitted requiring retransmission because they were not acknowledged by the far-end's SSCOP peer

Data Source

MSC_IOG20_APG40

Source Field

SDPDUTRN

Source Section

SS7HSLTRAF

SL10SCAN

Number of 10 second scans in S7SL

Data Source

MSC_IOG20_APG40

Source Field

SL10SCAN

Source Section

SS7SLMT2

SL10SCAN_SS7HSLMT2

Number of 10 sec scans in S7SL

Data Source

MSC_IQG20_APG40

Source Field

SL10SCAN

Source Section

SS7HSLMT2

SLPARMGP

Parameter group number for signalling link

Data Source

MSC_IQG20_APG40

Source Field

SLPARMGP

Source Section

SS7SLMT2

SLPARMGP_SS7HSLMT2

Parameter group number for signalling link

Data Source

MSC_IQG20_APG40

Source Field

SLPARMGP

Source Section

SS7HSLMT2

SYS7IND_C7SL1

Indicator

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SL1

SYS7IND_C7SL2

Indicator

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SL2

TDCNGLV1

Total duration of level 1 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV1

Source Section

SS7SLMT1

TDCNGLV1_SS7HSLMT1

Total duration of level 1 congestion state in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV1

Source Section

SS7HSLMT1

TDCNGLV2

Total duration of level 2 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV2

Source Section

SS7SLMT1

TDCNGLV2_SS7HSLMT1

Total duration of level 2 congestion state in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV2

Source Section

SS7HSLMT1

TDCNGLV3

Total duration of level 3 congestion state in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TDCNGLV3

Source Section

SS7SLMT1

TDCNGLV3_SS7HSLMT1

Total duration of level 3 congestion state in 10 sec units

Data Source

MSC_IQG20_APG40

Source Field

TDCNGLV3

Source Section

SS7HSLMT1

THRACHOV

Value of hourly link maintenance threshold for automatic changeovers

Data Source

MSC_IQG20_APG40

Source Field

THRACHOV

Source Section

SS7SLMT2

THRMSUER

Value of hourly link maintenance threshold for MSUs received in error

Data Source

MSC_IQG20_APG40

Source Field

THRMSUER

Source Section

SS7SLTRAFF

THRNEGAK

Value of hourly link maintenance threshold for negative acknowledgement received

Data Source

MSC_IOG20_APG40

Source Field

THRNEGAK

Source Section

SS7SLTRAFF

TLNKACTV

Signalling link active time in 10 sec. units

Data Source

MSC_IOG20_APG40

Source Field

TLNKACTV

Source Section

SS7SLMT1

TLNKACTV_SS7HSLMT1

Signalling link active time in 10 second units

Data Source

MSC_IOG20_APG40

Source Field

TLNKACTV

Source Section

SS7HSLMT1

TOTOCMSG_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in MTP3 messages

Data Source

MSC_IOG20_APG40

Source Field

TOTOCMSG

Source Section

SS7HSLMT1

TOTOCMSU

Accumulated total of link transmission buffer occupancy in MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTOCMSU

Source Section

SS7SLMT1

TOTOCOCT

Accumulated total of link transmission buffer occupancy in octets

Data Source

MSC_IOG20_APG40

Source Field

TOTOCOCT

Source Section

SS7SLMT1

TOTOCOCT_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in octets

Data Source

MSC_IOG20_APG40

Source Field

TOTOCOCT

Source Section

SS7HSLMT1

TOTPRIO0

Accumulated total of link transmission buffer occupancy in priority 0 MSUs

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO0

Source Section

SS7SLMT1

TOTPRIO0_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 0 MTP3 messages

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO0

Source Section

SS7HSLMT1

TOTPRIO1

Accumulated total of link transmission buffer occupancy in priority 1 MSUs

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO1

Source Section

SS7SLMT1

TOTPRIO1_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 1 MTP3 messages

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO1

Source Section

SS7HSLMT1

TOTPRIO2

Accumulated total of link transmission buffer occupancy in priority 2 MSUs

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO2

Source Section

SS7SLMT1

TOTPRIO2_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 2 MTP3 messages

Data Source

MSC_IQG20_APG40

Source Field

TOTPRIO2

Source Section

SS7HSLMT1

TOTPRIO3

Accumulated total of link transmission buffer occupancy in priority 3 MSUs

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO3

Source Section

SS7SLMT1

TOTPRIO3_SS7HSLMT1

Accumulated total of link transmission buffer occupancy in priority 3 MTP3 messages

Data Source

MSC_IOG20_APG40

Source Field

TOTPRIO3

Source Section

SS7HSLMT1

TRANOCT_MSC_C7Link

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7SLTRAFF

TRANOCT_SS7HSLTRAF

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7HSLTRAF

UNAVAILDUR

Duration of SL unavailability (all reasons) in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVAILDUR

Source Section

C7SL1

UNAVRBLDUR

Duration of SL unavailability due to remote processor outage in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVRBLDUR

Source Section

C7SL1

UNAVSLFDUR

Duration of SL unavailability due to link failure in seconds

Data Source

MSC_IOG20_APG40

Source Field

UNAVSLFDUR

Source Section

C7SL1

UNEXPDUS_SS7HSLMT3

Number of unexpected SSCOP PDUs received

Data Source

MSC_I0G20_APG40

Source Field

UNEXPDUS

Source Section

SS7HSLMT3

MSC_SS7LinkSet Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7LinkSet entity.

C7_LSTL_AvgRX

Average C7 Link Received Traffic (Erlangs)

Calculation

`mean(MSC_SS7Link, C7_SLTL_RX)`

C7_LSTL_AvgTX

Average C7 Link Transmitted Traffic (Erlangs)

Calculation

`mean(MSC_SS7Link, C7_SLTL_TX)`

Critical_Carried

critical Carried

Calculation

`0.4`

DIMENSION

Dimensioning Parameter

Calculation

```
WM_FCAST_DIMENSION(instance_id, TimeAndElement.timestamp)
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

```
""
```

GROWTH

The Growth in Erlangs per Week for Linear Regression

Calculation

```
WM_FCAST_GROWTH(instance_id) * 3600 * 24 * 7
```

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

Link_Unavailable

Link UnAvailability in LinkSet

Calculation

```
AGGR( MSC_SS7Link, UNAVAILDUR )
```

Link_Usage

Sum of TX and RX Usage

Calculation

```
AGGR(MSC_SS7Link, Link_Usage)
```

Links_Q

Number of assigned SLs (Q aggregator)

Calculation

```
LINKS
```

Ln_Correlation

Correlation co-efficient

Calculation

```
WM_FCAST_CORRELATION(instance_id)
```

Ln_Exhaust_Date

Exhaustion Date based on Critical Traffic

Calculation

```
dateToString(stringToDate(TimeAndElement.tstamp, "%Y-%m-%d") +  
(int)(vsum(Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24)), "%Y-%m-%d")
```

Ln_Exhaust_Days

Number of Days until LinkSet Exhausts, based on Critical Traffic

Calculation

```
vsum((int) vsum(Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24), -7)
```

MSUS

Number of MSU received and Transmitted Per LSET

Calculation

```
AGGR(MSC_SS7Link, MSUS)
```

Nominal_Capacity

Nominal Capacity based on specified Max Nominal erlangs Per LSET

Calculation

```
0.4 * NumLinks
```

NSLFA

Number of SL failures, all reasons.

Calculation

```
AGGR(MSC_SS7Link, NSLFA)
```

NumberMSUsReceived

Number of MSU's received

Calculation

`nullValue (AGGR (MSC_SS7Link, NMSURE_C7SL1), MSURECD)`

NumberMSUsTransmitted

Number of MSU's transmitted

Calculation

`nullValue (AGGR (MSC_SS7Link, NMSUTR_C7SL1), AGGR (MSC_SS7Link, MSUTRAN_MSC_C7Link))`

NumberSLFailures

Number of SL failures, all reasons

Calculation

`nullValue (AGGR (MSC_SS7Link, NSLFA), AGGR (MSC_SS7Link, NMDCLFLR))`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

NumLinks

Number of Links Per Linkset

Calculation

`count (MSC_SS7Link)`

PercentageLinkAvailability

Signalling Link Unavailability Duration

Calculation

`100 * (1 - (nullValue (AGGR (MSC_SS7Link, UNAVAILDUR), (AGGR (MSC_SS7Link, DRDCLFLR) * 10)) / (1.0 * (PERLEN * 60))))`

PercentageLinksetInService

Percentage Linkset In Service

Calculation

```
(100 * (nullValue(AGGR(MSC_SS7Link, ASL-  
DUR), (AGGR(MSC_SS7Link, TLNKACTV)*10)) / (1.0 * (PERLEN * 60))))
```

RX_AvgLink

Total (RX) LinkSet Usage per Link

Calculation

```
C7_LSTL_AvgRX / ( 1.0 * NumLinks )
```

RX_MSUS

RX MSUS For all Links

Calculation

```
AGGR(MSC_SS7Link, NMSURE)
```

RX_Octets

RX SIF/SIO Octets for all Links

Calculation

```
AGGR(MSC_SS7Link, NSIFSRE)
```

Sample_Size

The number of Samples in the Regression

Calculation

```
WM_FCAST_SAMPLES(instance_id)
```

TX_AvgLink

Total (TX) LinkSet Usage per Link

Calculation

```
C7_LSTL_AvgTX / ( 1.0 * NumLinks )
```

TX_MSUS

TX MSUS For all Links

Calculation

```
AGGR(MSC_SS7Link, NMSUTR)
```

TX_Octets

TX SIF/SIO Octets for all Links

Calculation

AGGR(MSC_SS7Link, NSIFTR)

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC_SS7LinkSet Peg Counts

The following is a list of peg counts for the MSC_SS7LinkSet entity.

ASPADUR_MSC

Duration of adjacent SP inaccessible in seconds

Data Source

MSC_IOG20_APG40

Source Field

ASPADUR

Source Section

C7ADJSLP

ASPINA_MSC

Number of occurrences of adjacent SP inaccessible

Data Source

MSC_IOG20_APG40

Source Field

ASPINA

Source Section

C7ADJSLP

AVLINKS

Number of currently available links (ACT)

Data Source

MSC_IQG20_APG40

Source Field

AVLINKS

Source Section

SS7LS

AVLINKS_SS7HSLS

Number of currently available links (ACT)

Data Source

MSC_IQG20_APG40

Source Field

AVLINKS

Source Section

SS7HSLS

CLUSTERCODE_MSC_SS7LS

SS7 Link Cluster code

Data Source

MSC_IQG20_APG40

Source Field

CLUSTERCODE

Source Section

SS7LS

ICUICELS_SS7HSLS

Total number of incoming (received) ATM user information (UI) cells

Data Source

MSC_IOG20_APG40

Source Field

ICUICELS

Source Section

SS7HSLS

INCCELLS_SS7HSLS

Total number of incoming (received) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

INCCELLS

Source Section

SS7HSLS

LINKS

Number of assigned SLs

Data Source

MSC_IOG20_APG40

Source Field

LINKS

Source Section

SS7LS

LINKS_SS7HSLS

Number of assigned signalling links

Data Source

MSC_IOG20_APG40

Source Field

LINKS

Source Section

SS7HSLS

LSMTCST

Maintenance state (same as 'link set service status')

Data Source

MSC_IOG20_APG40

Source Field

LSMTCST

Source Section

SS7LS

LSMTCST_SS7HSLS

Maintenance state (same as 'link set service status')

Data Source

MSC_IOG20_APG40

Source Field

LSMTCST

Source Section

SS7HSLS

MEMBERCODE_MSC_SS7LS

SS7 Cluster Member Code

Data Source

MSC_IOG20_APG40

Source Field

MEMBERCODE

Source Section

SS7LS

MSC_RELEASE

Release

MSGSRCVD_SS7HSLS

Number of MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

MSGSRCVD

Source Section

SS7HSLS

MSGSTRAN_SS7HSLS

Number of MTP3 messages transmitted, including those for which retransmissions of SSCOP SD PDUs

Data Source

MSC_IOG20_APG40

Source Field

MSGSTRAN

Source Section

SS7HSLS

MSURECD

Number of MSU's received

Data Source

MSC_IOG20_APG40

Source Field

MSURECD

Source Section

SS7LS

MSURETRN

Number of MSU's retransmitted

Data Source

MSC_IQG20_APG40

Source Field

MSURETRN

Source Section

SS7LS

MSUTRAN

Number of MSU's transmitted, (retransmission not included)

Data Source

MSC_IQG20_APG40

Source Field

MSUTRAN

Source Section

SS7LS

N10SCAN_MSC_C7LinkSet

Number of 10 sec. scans

Data Source

MSC_IQG20_APG40

Source Field

N10SCAN

Source Section

SS7LS

N10SCAN_SS7HSLS

Number of 10 sec scans

Data Source

MSC_IQG20_APG40

Source Field

N10SCAN

Source Section

SS7HSLS

OGUICELS_SS7HSLS

Total number of outgoing (transmitted) ATM user information (UI) cells

Data Source

MSC_IQG20_APG40

Source Field

OGUICELS

Source Section

SS7HSLS

OOSLINKS

Number of links in the Out-of-Service (OSS) Maintenance State

Data Source

MSC_IQG20_APG40

Source Field

OOSLINKS

Source Section

SS7LS

OOSLINKS_SS7HSLS

Number of links in the out-of-service (OOS) maintenance state

Data Source

MSC_IOG20_APG40

Source Field

OOSLINKS

Source Section

SS7HSLS

OUTCELLS_SS7HSLS

Total number of outgoing (transmitted) NDC-valid ATM cells

Data Source

MSC_IOG20_APG40

Source Field

OUTCELLS

Source Section

SS7HSLS

PDUOCTRC_SS7HSLS

Total number of SSCOP PDU octets received

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTRC

Source Section

SS7HSLS

PDUOCTTR_SS7HSLS

Total number of SSCOP PDU octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUOCTTR

Source Section

SS7HSLS

PDUSRCVD_SS7HSLS

Total number of SSCOP PDUs received

Data Source

MSC_IOG20_APG40

Source Field

PDUSRCVD

Source Section

SS7HSLS

PDUSTRAN_SS7HSLS

Total number of SSCOP PDUs transmitted

Data Source

MSC_IOG20_APG40

Source Field

PDUSTRAN

Source Section

SS7HSLS

PERLEN

Period Length

RCVDOCT

Number of SIF and SIO octets received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7LS

RECVD OCT_SS7HSLS

Number of SIF and SIO octets for MTP3 messages received

Data Source

MSC_IOG20_APG40

Source Field

RECVDOCT

Source Section

SS7HSLS

RETRNOCT

Number of SIF, SIO, LI, FSN, and BSN octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

RETRNOCT

Source Section

SS7LS

SDOCTRCV_SS7HSLS

Number of SSCOP SD PDU octets received

Data Source

MSC_IOG20_APG40

Source Field

SDOCTRCV

Source Section

SS7HSLS

SDOCTRTR_SS7HSLS

Number of SSCOP SD PDU octets retransmitted

Data Source

MSC_IOG20_APG40

Source Field

SDOCTRTR

Source Section

SS7HSLS

SDOCTTRN_SS7HSLS

Number of SSCOP SD PDU octets transmitted, including retransmissions

Data Source

MSC_IOG20_APG40

Source Field

SDOCTTRN

Source Section

SS7HSLS

SDPDURCV_SS7HSLS

Number of SSCOP SD PDUs received

Data Source

MSC_IOG20_APG40

Source Field

SDPDURCV

Source Section

SS7HSLS

SDPDURTR_SS7HSLS

Number of SSCOP SD PDUs retransmitted

Data Source

MSC_IQG20_APG40

Source Field

SDPDURTR

Source Section

SS7HSLS

SDPDUTRN_SS7HSLS

Number of SSCOP SD PDUs transmitted, including retransmissions

Data Source

MSC_IQG20_APG40

Source Field

SDPDUTRN

Source Section

SS7HSLS

STUNADURAT_MSC

Duration of unavailability of signalling linkset in seconds

Data Source

MSC_IQG20_APG40

Source Field

STUNADURAT

Source Section

C7SLSET

SYS7IND_MSC_C7ADJSLP

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7ADJSLP

SYS7IND_MSC_C7SLSET

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7SLSET

TDLSINAC

Total duration of LS inactivity due to no links in LS are active in 10 sec. Units

Data Source

MSC_IOG20_APG40

Source Field

TDLSINAC

Source Section

SS7LS

TDLSINAC_SS7HSLS

Total duration of LS inactivity due to no links in LS are active in 10 sec units

Data Source

MSC_IOG20_APG40

Source Field

TDLSINAC

Source Section

SS7HSLS

TRANOCT

Number of SIF and SIO octets transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7LS

TRANOCT_SS7HSLS

Number of SIF and SIO octets for MTP3 messages transmitted

Data Source

MSC_IOG20_APG40

Source Field

TRANOCT

Source Section

SS7HSLS

UAVLINKS

Number of links in the Unavailable (UNAV) maintenance state

Data Source

MSC_IOG20_APG40

Source Field

UAVLINKS

Source Section

SS7LS

UAVLINKS_SS7HSLS

Number of links in the unavailable (UNAV) maintenance state

Data Source

MSC_I0G20_APG40

Source Field

UAVLINKS

Source Section

SS7HSLS

MSC_SS7RouteSet Primitive Calculations

The following is a list of primitive calculations for the MSC_SS7RouteSet entity.

C7_RSAV_%

%C7 RouteSet Availability Time

Calculation

$100 * (1 - (STINADURAT_MSC / (60.0 * NI.MSC.PERLEN)))$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$PERLEN / (1.0 * 60)$

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSC_SS7RouteSet Peg Counts

The following is a list of peg counts for the MSC_SS7RouteSet entity.

MSC_RELEASE

Release

PERLEN

Period Length

STINACNT_MSC

Number of occurrences of unavailability of route set to a given destination

Data Source

MSC_IQG20_APG40

Source Field

STINACNT

Source Section

C7RTSET

STINADURAT_MSC

Duration of unavailability of route set in seconds

Data Source

MSC_IOG20_APG40

Source Field

STINADURAT

Source Section

C7RTSET

SYS7IND_MSC_C7RTSET

Linkset state

Data Source

MSC_IOG20_APG40

Source Field

SYS7IND

Source Section

C7RTSET

MSCOutTrunk Primitive Calculations

The following is a list of primitive calculations for the MSCOutTrunk entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

MSCOutTrunk Peg Counts

The following is a list of peg counts for the MSCOutTrunk entity.

BANSWCNT

Number of B - answers

CONVLACC

Accumulated traffic level after B - answer

IDISCCNT

Number of rejected calls

MSC_RELEASE

Release

OCONGCNT

Number of unsuccessful seizure attempts of outgoing individual

ODISCCNT

Number of disconnections of outgoing individual in register position

OTTIME

Accumulated seizure time of outgoing individual in register position

PERLENSEC

Period Length

SCANCNT

Number of accumulations of the level counters

SCANNINT

Interval between scannings in seconds

THCONCNT

Number of through connections

TRALACC

Accumulated traffic level after through connection

MSCTrunkDest Primitive Calculations

The following is a list of primitive calculations for the MSCTrunkDest entity.

BANSWCNT_TrunkDest

Number of B - answers

Calculation

```
nullValue(BANSWCNT, AGGR(MSCOutTrunk, BANSWCNT))
```

CONVLACC_TrunkDest

Accumulated traffic level after B - answer

Calculation

```
nullValue(CONVLACC, AGGR(MSCOutTrunk, CONVLACC))
```

DestinationTraffic_AfterBAnsw

Traffic in Erlang from B-answer to release

Calculation

```
CONVLACC_TrunkDest / SCANCNT_TrunkDest
```

DestinationTraffic_BeforeBAnsw

Traffic in Erlang from reaching the EOS state waiting for B-answer to release.

Calculation

```
TRALACC_TrunkDest / SCANCNT_TrunkDest
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IDISCCNT_TrunkDest

Number of rejected calls

Calculation

`nullValue(IDISCCNT, AGGR(MSCOutTrunk, IDISCCNT))`

INTERVALS_TRDIP

Number of 60 minute intervals covered (from TRDIP data)

Calculation

`PERLEN_TRDIP / (1.0 * 60)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

OCONGCNT_TrunkDest

Number of unsuccessful seizure attempts of outgoing individual

Calculation

`nullValue(OCONGCNT, AGGR(MSCOutTrunk, OCONGCNT))`

ODISCCNT_TrunkDest

Number of disconnections of outgoing individual in register position

Calculation

`nullValue(ODISCCNT, AGGR(MSCOutTrunk, ODISCCNT))`

OTTIME_TrunkDest

Accumulated seizure time of outgoing individual in register position

Calculation

`nullValue(OTTIME, AGGR(MSCOutTrunk, OTTIME))`

SCANCNT_TrunkDest

Number of accumulations of the level counters

Calculation

`nullValue(SCANCNT, AGGR(MSCOutTrunk, SCANCNT) * 1.0 / count(MSCOutTrunk))`

SCANNINT_TrunkDest

Interval between scanings in seconds

Calculation

`nullValue(SCANNINT, AGGR(MSCOutTrunk, SCANNINT))`

THCONCNT_TrunkDest

Number of through connections

Calculation

`nullValue(THCONCNT, AGGR(MSCOutTrunk, THCONCNT))`

TRALACC_TrunkDest

Accumulated traffic level after through connection

Calculation

`nullValue(TRALACC, AGGR(MSCOutTrunk, TRALACC))`

MSCTrunkDest Peg Counts

The following is a list of peg counts for the MSCTrunkDest entity.

BANSWCNT

Number of B - answers

Data Source

MSC_TRDIP

Source Field

BANSWCNT

Source Section

ASC_TRDIP

CONVLACC

Accumulated traffic level after B - answer

Data Source

MSC_TRDIP

Source Field

CONVLACC

Source Section

ASC_TRDIP

IDISCCNT

Number of rejected calls

Data Source

MSC_TRDIP

Source Field

IDISCCNT

Source Section

ASC_TRDIP

MSC_Release

Release

OCONGCNT

Number of unsuccessful seizure attempts of outgoing individual

Data Source

MSC_TRDIP

Source Field

OCONGCNT

Source Section

ASC_TRDIP

ODISCCNT

Number of disconnections of outgoing individual in register position

Data Source

MSC_TRDIP

Source Field

ODISCCNT

Source Section

ASC_TRDIP

OTTIME

Accumulated seizure time of outgoing individual in register position

Data Source

MSC_TRDIP

Source Field

OTTIME

Source Section

ASC_TRDIP

PERLEN_TRDIP

Period Length (of TRDIP data)

SCANCNT

Number of accumulations of the level counters

Data Source

MSC_TRDIP

Source Field

SCANCNT

Source Section

ASC_TRDIP

SCANNINT

Interval between scannings in seconds

Data Source

MSC_TRDIP

Source Field

SCANNINT

Source Section

ASC_TRDIP

THCONCNT

Number of through connections

Data Source

MSC_TRDIP

Source Field

THCONCNT

Source Section

ASC_TRDIP

TRALACC

Accumulated traffic level after through connection

Data Source

MSC_TRDIP

Source Field

TRALACC

Source Section

ASC_TRDIP

MSCTrunkType Primitive Calculations

The following is a list of primitive calculations for the MSCTrunkType entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

MSCTrunkType Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

MSCTrunkType Peg Counts

The following is a list of peg counts for the MSCTrunkType entity.

MSC_RELEASE

Release

NDISS

Number of disturbances

Data Source

MSC_IQG20_APG40

Source Field

NDISS

Source Section

TRUNKSUP

NDISSBLOC

Number of blockings

Data Source

MSC_IQG20_APG40

Source Field

NDISSBLOC

Source Section

TRUNKSUP

NFAUSBLOC

Number of signalling faults

Data Source

MSC_IQG20_APG40

Source Field

NFAUSBLOC

Source Section

TRUNKSUP

NNOTSEIZE

Number of not seized trunks

Data Source

MSC_IQG20_APG40

Source Field

NNOTSEIZE

Source Section

TRUNKSUP

NQUAS

Number of indications

Data Source

MSC_IQG20_APG40

Source Field

NQUAS

Source Section

TRUNKSUP

NQUASBLOC

Number of blockings

Data Source

MSC_IQG20_APG40

Source Field

NQUASBLOC

Source Section

TRUNKSUP

PERLEN

Period Length

Multiplex_Section Primitive Calculations

The following is a list of primitive calculations for the Multiplex_Section entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

Higher_Order_Path ID

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Multiplex_Section Peg Counts

The following is a list of peg counts for the Multiplex_Section entity.

MSFBBE

Number of background block errors multiplex section far end

Data Source

BSC_IQG20_APG40

Source Field

MSFBBE

Source Section

SDIPMS

MSFES

Number of errored seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFES

Source Section

SDIPMS

MSFSES

Number of severely errored seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFSES

Source Section

SDIPMS

MSFUAS

Number of unavailable seconds far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFUAS

Source Section

SDIPMS

MSFUAV

Number of unavailable events far end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSFUAV

Source Section

SDIPMS

MSNBBE

Number of background block errors multiplex section near end

Data Source

BSC_IQG20_APG40

Source Field

MSNBBE

Source Section

SDIPMS

MSNES

Number of errored seconds near end multiplex section.

Data Source

BSC_IQG20_APG40

Source Field

MSNES

Source Section

SDIPMS

MSNSES

Number of severely errored seconds near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNSES

Source Section

SDIPMS

MSNUAS

Number of unavailable seconds near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNUAS

Source Section

SDIPMS

MSNUAV

Number of unavailable events near end multiplex section

Data Source

BSC_IQG20_APG40

Source Field

MSNUAV

Source Section

SDIPMS

PERLEN

Period Length

SMI

Flag indicating if any suspect marked intervals occurred during 24 h measurement period multiplex section

Data Source

BSC_IQG20_APG40

Source Field

SMI

Source Section

SDIPMS

NB_MSC Primitive Calculations

The following is a list of primitive calculations for the NB_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

NB_MSC Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

NB_MSC Peg Counts

The following is a list of peg counts for the NB_MSC entity.

MSC_RELEASE

Release

NBIRASDHTOT

Number of incoming relocation signaling to signaling attempts from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBIRASDHTOT

Source Section

NBRMSCSRNS

NBIRATCHTOT

Number of incoming relocation traffic to traffic attempts from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBIRATCHTOT

Source Section

NBRMSCSRNS

NBNSCASUCC

A successful channel assignment should be counted in non-anchor MSC, if RANAP RAB ASSIGNMENT COMPLETE message is sent on the E-interface and if the B-answer is sent on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NBNSCASUCC

Source Section

NBRMSCSRNS

NBNSCATOT

In a subsequent channel assignment attempt should be counted in non-anchor MSC, when the request for the handover number is received.

Data Source

MSC_IQG20_APG40

Source Field

NBNSCATOT

Source Section

NBRMSCSRNS

NBORASDHTOT

Number of subsequent relocation signaling to signaling attempts to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBORASDHTOT

Source Section

NBRMSCSRNS

NBORATCHTOT

Number of subsequent relocation traffic to traffic attempts to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBORATCHTOT

Source Section

NBRMSCSRNS

NBRASDHTOT

Number of basic RELOCATION signaling to signaling attempts to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRASDHTOT

Source Section

NBRMSCSRNS

NBRATCHTOT

Number of basic RELOCATION traffic to traffic attempts to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRATCHTOT

Source Section

NBRMSCSRNS

NBRSASDHSUCC

Number of successful basic relocation signaling to signaling to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRSASDHSUCC

Source Section

NBRMSCSRNS

NBRSATCHSUCC

Number of successful basic relocation traffic to traffic to neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBRSATCHSUCC

Source Section

NBRMSCSRNS

NBSCHASUCC

A subsequent channel assignment Success should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NBSCHASUCC

Source Section

NBRMSCSRNS

NBSCHATOT

A subsequent channel assignment attempt should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NBSCHATOT

Source Section

NBRMSCSRNS

NBSIRASDHSUCC

Number of successful incoming relocations signaling to signaling from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC)

Data Source

MSC_IQG20_APG40

Source Field

NBSIRASDHSUCC

Source Section

NBRMSCSRNS

NBSIRATCHSUCC

Number of successful incoming relocations traffic to traffic from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC).

Data Source

MSC_IQG20_APG40

Source Field

NBSIRATCHSUCC

Source Section

NBRMSCSRNS

NBSORASDHSUCC

Number of successful subsequent relocations signaling to signaling to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBSORASDHSUCC

Source Section

NBRMSCSRNS

NBSORATCHSUCC

Number of successful subsequent relocations traffic to traffic to neighboring MSC (back to anchor or to third MSC).

Data Source

MSC_IOG20_APG40

Source Field

NBSORATCHSUCC

Source Section

NBRMSCSRNS

NBSRASDHTOT

Number of subsequent relocation signaling to signaling attempts from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRASDHTOT

Source Section

NBRMSCSRNS

NBSRATCHTOT

Number of subsequent relocation traffic to traffic attempts from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATCHTOT

Source Section

NBRMSCSRNS

NBSRATSDHTOT

Number of subsequent relocation signaling to signaling attempts from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATSDHTOT

Source Section

NBRMSCSRNS

NBSRATTCHTOT

Number of subsequent relocation traffic to traffic attempts from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NBSRATTCHTOT

Source Section

NBRMSCSRNS

NBSSRAATCHSUCC

Number of successful subsequent relocation traffic to traffic from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRAATCHSUCC

Source Section

NBRMSCSRNS

NBSSRASDHSUCC

Number of successful subsequent relocation signaling to signaling from neighboring MSC back to anchor MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRASDHSUCC

Source Section

NBRMSCSRNS

NBSSRATSDHSUCC

Number of successful subsequent relocation signaling to signaling from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRATSDHSUCC

Source Section

NBRMSCSRNS

NBSSRATTCHSUCC

Number of successful subsequent relocation traffic to traffic from neighboring MSC to third MSC for each neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NBSSRATTCHSUCC

Source Section

NBRMSCSRNS

NCELHND SUCC

Number of successful handovers to the target cell from this serving cell.

Data Source

MSC_IQG20_APG40

Source Field

NCELHND SUCC

Source Section

NBRCELLST

NCELHND TOT

Number of handover attempts to the target cell from this serving cell

Data Source

MSC_IQG20_APG40

Source Field

NCELHNDTOT

Source Section

NBRCELLST

NNBRBUGASCSUCC

Nr of succ basic UMTS to GSM hos on signalling chs to neighbouring MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASCSUCC

Source Section

NBRMSCUGHO

NNBRBUGASCTOT

Nr of basic UMTS to GSM ho attempts on signalling chs to neighbouring MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASCTOT

Source Section

NBRMSCUGHO

NNBRBUGASUCC

Number of successful basic UMTS to GSM handovers to neighbouring MSC/VLR server

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGASUCC

Source Section

NBRMSCUGHO

NNBRBUGATOT

Number of basic UMTS to GSM handover attempts to neighbouring MSC/VLR server

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGATOT

Source Section

NBRMSCUGHO

NNBRBUGSTSUC

Nr of succ basic hos from signalling ch to traffic ch to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGSTSUC

Source Section

NBRMSCUGHO

NNBRBUGSTTOT

Nr of basic ho attempts from signalling ch to traffic ch to neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRBUGSTTOT

Source Section

NBRMSCUGHO

NNBRHBAISDHSUCC

Number of successful incoming handovers on signalling channels from neighboring MSC.

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBAISDHSUCC

Source Section

NBRMSCLST

NNBRHBAISDHTOT

incoming handover attempts on signalling channels from neighboring MSC. Incremented after identification of target and serving cell

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBAISDHTOT

Source Section

NBRMSCLST

NNBRHBANSUCC

Number of successful basic handovers to a neighbouring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRHBANSUCC

Source Section

NBRMSCLST

NNBRHBANTOT

Number of basic handover attempts to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBANTOT

Source Section

NBRMSCLST

NNBRHBAOSDHSUCC

Number of successful basic handovers on signalling channels (SDCCH) to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBAOSDHSUCC

Source Section

NBRMSCLST

NNBRHBAOSDHTOT

Number of basic handover attempts on signalling channels (SDCCH) to a neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBAOSDHTOT

Source Section

NBRMSCLST

NNBRHBSTSUCC

Number of successful basic handovers to a neighbouring MSC from SDCCH to TCH

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBSTSUC

Source Section

NBRMSCLST

NNBRHBSTTOT

Number of basic handover attempts to a neighbouring MSC from SDCCH to TCH

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBSTTOT

Source Section

NBRMSCLST

NNBRHBTTSUCC

Number of successful basic handovers to a neighbouring MSC on TCH before through connection

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBTTSUCC

Source Section

NBRMSCLST

NNBRHBTTTOT

Number of basic handover attempts to neighbouring MSC on TCH before through connection

Data Source

MSC_IOG20_APG40

Source Field

NNBRHBTTTOT

Source Section

NBRMSCLST

NNBRHINASUCC

Number of successful incoming handovers from neighboring MSC on signalling and traffic channels

Data Source

MSC_IOG20_APG40

Source Field

NNBRHINASUCC

Source Section

NBRMSCLST

NNBRHINATOT

Number of incoming handover attempts from neighboring MSC on signalling and traffic channels

Data Source

MSC_IOG20_APG40

Source Field

NNBRHINATOT

Source Section

NBRMSCLST

NNBRHSANSUCC

Number of successful subsequent handovers from the neighbouring MSC back to anchor MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSANSUCC

Source Section

NBRMSCLST

NNBRHSANTOT

Number of subsequent handover attempts from neighbouring MSC back to anchor MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSANTOT

Source Section

NBRMSCLST

NNBRHSISDHSUCC

successful subsequent handovers on signalling channels (SDCCH), from neighbouring MSC back to anchor MSC, for each serving MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSISDHSUCC

Source Section

NBRMSCLST

NNBRHSISDHTOT

subsequent handover attempts on signalling channels (SDCCH), from neighbouring MSC back to anchor MSC for each serving MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSISDHTOT

Source Section

NBRMSCLST

NNBRHSNASUCC

Number of successful subsequent handovers to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSNASUCC

Source Section

NBRMSCLST

NNBRHSNATOT

Number of subsequent handover attempts to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IOG20_APG40

Source Field

NNBRHSNATOT

Source Section

NBRMSCLST

NNBRHSOSDHSUCC

Number of successful subsequent handovers on signalling channels to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSOSDHSUCC

Source Section

NBRMSCLST

NNBRHSOSDHTOT

subsequent handover attempts on signalling channels to a neighboring MSC (back to anchor or to a third MSC)

Data Source

MSC_IQG20_APG40

Source Field

NNBRHSOSDHTOT

Source Section

NBRMSCLST

NNBRHTHISDHSUCC

successful subsequent handovers on signalling channels (SDCCH), from a neighbouring MSC to a third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRHTHISDHSUCC

Source Section

NBRMSCLST

NNBRHTHISDHTOT

subsequent handover attempts on signalling channels (SDCCH), from a neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISDHTOT

Source Section

NBRMSCLST

NNBRHTHISUCC

Number of successful subsequent handovers from neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISUCC

Source Section

NBRMSCLST

NNBRHTHISITOT

Number of subsequent handover attempts from neighbouring MSC to a third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRHTHISITOT

Source Section

NBRMSCLST

NNBRIHOATCHTOT

Number of incoming handover attempts from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is traffic to traffic and the HO is WCDMA to GSM.

Data Source

MSC_IQG20_APG40

Source Field

NNBRIHOATCHTOT

Source Section

NBRMSCUGHO

NNBRISDHHOATOT

Number of incoming handover attempts from signaling to signaling channel from neighboring MSC (incoming handovers include basic relocations and subsequent relocations from neighboring MSC), in case the call type is signaling to signaling and the HO is WCD

Data Source

MSC_IQG20_APG40

Source Field

NNBRISDHHOATOT

Source Section

NBRMSCUGHO

NNBRITCHHOASUCC

Number of successful incoming handovers from signaling to signaling channel from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is signaling to signaling and the HO is WCDM

Data Source

MSC_IQG20_APG40

Source Field

NNBRITCHHOASUCC

Source Section

NBRMSCUGHO

NNBRNSUGSCASUCC

A successful channel assignment should be counted in non-anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is sent on the E-interface and if the B-answer is sent on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NNBRNSUGSCASUCC

Source Section

NBRMSCUGHO

NNBRNUGSCATOT

A subsequent channel assignment attempt should be counted in non- anchor MSC, when the request for the handover number is received.

Data Source

MSC_IQG20_APG40

Source Field

NNBRNUGSCATOT

Source Section

NBRMSCUGHO

NNBRSCHARSUCC

Number of successful subsequent channel assignments using a circuit connection to a neighboring MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSCHARSUCC

Source Section

NBRMSCLST

NNBRSCHARTOT

Number of subsequent TCH assignment attempts using a circuit connection to neighboring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSCHARTOT

Source Section

NBRMSCLST

NNBRSCHASSUCC

successfully sent subsequent TCH assignments using a circuit connection to neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSCHASSUCC

Source Section

NBRMSCLST

NNBRSCHASTOT

Number of sent subsequent TCH assignment attempts using a circuit connection to neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNBRSCHASTOT

Source Section

NBRMSCLST

NNBRSIHOATCHSUCC

Number of successful incoming handover attempts from neighboring MSC (incoming handovers include basic handovers and subsequent handovers from neighboring MSC), in case the call type is traffic to traffic and the HO is WCDMA to GSM.

Data Source

MSC_IQG20_APG40

Source Field

NNBRSIHOATCHSUCC

Source Section

NBRMSCUGHO

NNBRSUGSCASUCC

A successful subsequent channel assignment should be counted in anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is received on the E-interface and if the B-answer is received on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NNBRSUGSCASUCC

Source Section

NBRMSCUGHO

NNBRSUGSSUCC

Nr of succ subsequent UMTS to GSM hos on signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSUGSSUCC

Source Section

NBRMSCUGHO

NNBRSUGSTOT

Nr of subsequent UMTS to GSM ho attempts on signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSUGSTOT

Source Section

NBRMSCUGHO

NNBRSUGSUCC

Nr of succ subsequent UMTS to GSM hos to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSUGSUCC

Source Section

NBRMSCUGHO

NNBRSUGTOT

Nr of subsequent UMTS to GSM ho attempts to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNBRSUGTOT

Source Section

NBRMSCUGHO

NNBRUGSCATOT

A subsequent channel assignment attempt should be counted in anchor MSC, when the request for the handover number is sent.

Data Source

MSC_IQG20_APG40

Source Field

NNBRUGSCATOT

Source Section

NBRMSCUGHO

NNGSUSCASUCC

A successful subsequent channel assignment should be counted in anchor MSC, if BSSMAP ASSIGNMENT COMPLETE message is received on the E-interface and if the B-answer is received on the PSTN/ISDN.

Data Source

MSC_IQG20_APG40

Source Field

NNGSUSCASUCC

Source Section

NBRMSCGUH

NNGUHASUCC

Nr of succ subsequent GSM to UMTS ho from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHASUCC

Source Section

NBRMSCGUH

NNGUHATOT

Nr of subsequent GSM to UMTS ho att from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NNGUHATOT

Source Section

NBRMSCGUH

NNGUHBSUCC

Number of successful basic GSM to UMTS handovers attempts to neighbouring MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHBSUCC

Source Section

NBRMSCGUH

NNGUHBTOT

Number of basic GSM to UMTS handovers

Data Source

MSC_IOG20_APG40

Source Field

NNGUHBTOT

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of succ incoming GSM to UMTS hos on signalling ch from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of inc GSM to UMTS ho attempts on sign ch from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of succ incoming GSM to UMTS hos from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHISSUCC

Source Section

NBRMSCGUH

NNGUHISSUCC

Nr of incoming GSM to UMTS ho attempts from neigh MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHITOT

Source Section

NBRMSCGUH

NNGUHQSSUCC

Nr of succ basic GSM to UMTS hos from signalling to signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSSUCC

Source Section

NBRMSCGUH

NNGUHQSTOT

Nr of basic GSM to UMTS ho att from signalling to signalling ch to neigh MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSTOT

Source Section

NBRMSCGUH

NNGUHQSSUCC

Nr of succ subs GSM to UMTS hos on sign ch from neigh MSC back to anch MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHQSSUCC

Source Section

NBRMSCGUH

NNGUHTSTOT

Nr of subse GSM to UMTS ho att on sign ch from neigh MSC back to anchor MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSTOT

Source Section

NBRMSCGUH

NNGUHTSSUCC

Nr of succ subs GSM to UMTS ho from sign to sign ch from neigh MSC to third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSSUCC

Source Section

NBRMSCGUH

NNGUHTSTOT

Nr of subs GSM to UMTS ho att from sign to sign ch from neigh MSC to third MSC

Data Source

MSC_IQG20_APG40

Source Field

NNGUHTSTOT

Source Section

NBRMSCGUH

NNGUHTSUCC

Nr of succ subsequent GSM to UMTS hos from neigh MSC to third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHTSUCC

Source Section

NBRMSCGUH

NNGUHTTOT

Nr of subsequent GSM to UMTS ho attempts from neigh MSC to third MSC

Data Source

MSC_IOG20_APG40

Source Field

NNGUHTTOT

Source Section

NBRMSCGUH

NNGUSCATOT

Number of subsequent traffic channel assignment attempts using a circuit connection to neighboring MSC.

Data Source

MSC_IOG20_APG40

Source Field

NNGUSCATOT

Source Section

NBRMSCGUH

NNGUSTSUCC

Nr of succ basic GSM to UMTS hos from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NNGUSTSUCC

Source Section

NBRMSCGUH

NNGUSTTOT

Nr of basic GSM to UMTS ho attempts from signalling to traffic channel

Data Source

MSC_IOG20_APG40

Source Field

NNGUSTTOT

Source Section

NBRMSCGUH

NNSCHASUCC

Number of successful subsequent channel assignments using a circuit connection

Data Source

MSC_IOG20_APG40

Source Field

NNSCHASUCC

Source Section

NBRMSCLST

NNSCHATOT

Number of subsequent channel assignment attempts using a circuit connection to neighbouring MSC after GSM to UMTS handover

Data Source

MSC_IQG20_APG40

Source Field

NNSCHATOT

Source Section

NBRMSCLST

PERLEN

Period Length

NBCell Primitive Calculations

The following is a list of primitive calculations for the NBCell entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

HO_CAUSEALL

Number of Handovers (All Causes)

Calculation

vsum(HOTOKCL, HOTOLCL, HODWNQA, HOUPLQA, HOEXCTA, HOATTLSS, HOATTHSS)

HO_DIRRETRY

Number of Handovers Due to Directed Retry

Calculation

nullFloat()

HO_DWNLKLVL

Number of Handovers Due to Downlink Level

Calculation

`nullFloat()`

HO_LOST

MS lost during handover

Calculation

`vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVERSUC)`

HO_SUC%

Percentage successful handovers

Calculation

`HOVERSUC * 100.0 / HOVERCNT`

HO_SUCBTCEL%

Percentage of successful assignment HO to better cell

Calculation

`HOSUCBCL * 100.0 / HOASBCL`

HO_SUCHIHR%

Percentage of successful HO at High HO Rate

Calculation

`HOSUCHR * 100.0 / HOATTHR`

HO_SUCWRCEL%

Percentage of successful assignment HO to worse cell

Calculation

`HOSUCWCL * 100.0 / HOASWCL`

HO_UPLNKLVL

Number of Handovers Due to Uplink Level

Calculation

`nullFloat()`

HOE_LOST

MS lost at BSC external handover

Calculation

```
protect(decode(NBTYPE,"E", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVERSUC),  
nullFloat()))
```

HOE_LOST%

MS lost at BSC external handover %

Calculation

```
100 * protect(decode(NBTYPE,"E", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat())) / (1.0 * protect(decode(NBTYPE,"E", HOVERCNT, null-  
Float())))
```

HOE_SUC

BSC external handover successful attempts

Calculation

```
protect(decode(NBTYPE,"E", HOVERSUC, nullFloat() ))
```

HOE_TOT

BSC external handover attempts

Calculation

```
protect(decode(NBTYPE,"E", HOVERCNT, nullFloat() ))
```

HOI_LOST

MS lost at BSC internal handover

Calculation

```
protect(decode(NBTYPE,"I", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVERSUC),  
nullFloat()))
```

HOI_LOST%

MS lost at BSC internal handover

Calculation

```
100 * protect(decode(NBTYPE,"I", vsum(HOVERCNT, -1 * HORTTOCH, -1 * HOVER-  
SUC), nullFloat())) / (1.0 * protect(decode(NBTYPE,"I", HOVERCNT, null-  
Float())))
```

HOI_SUC

BSC internal handover successful attempts

Calculation

`protect (decode (NBTYPE, "I", HOVERSUC, nullFloat()))`

HOI_TOT

BSC internal handover attempts

Calculation

`protect (decode (NBTYPE, "I", HOVERCNT, nullFloat()))`

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

LocalName

NBCell Name

Calculation

`LocalKey`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull (PERLEN) ? nullString() : "EricssonGSM"`

NBCell Peg Counts

The following is a list of peg counts for the NBCell entity.

BSS_RELEASE

Release

HOASBCL

Assign Handover Att to Better cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOASBCL

Source Section

NICELASS,NECELASS

HOASWCL

Assign Handover to Worse cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOASWCL

Source Section

NICELASS,NECELASS

HOATTHR

Number of handovers at high handover rate. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTHR

Source Section

NICELHOEX,NECELHOEX

HOATTHSS

HO attempts when serving cell is a high signal strength cell. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTHSS

Source Section

NICELHOEX,NECELHOEX

HOATTLSS

HO attempts when serving cell is a low signal strength cell. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOATTLSS

Source Section

NICELHOEX,NECELHOEX

HOATTSHOULDUTRAN

Number of handover attempts to a neighbouring UTRAN FDD cell due to the Service Handover value is 'should'.

Data Source

BSC_IOG20_APG40

Source Field

HOATTSHOULDUTRAN

Source Section

NUCELLREL

HODUPFT

Number of handover attempts during a predefined time (10 seconds). When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IOG20_APG40

Source Field

HODUPFT

Source Section

NECELHO,NECELHO

HODWNQA

Number of handovers at bad downlink quality. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IOG20_APG40

Source Field

HODWNQA

Source Section

NECELHO,NECELHO

HOEXCTA

Number of handovers due to exceeded time alignment. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOEXCTA

Source Section

NECELHO,NECELHO

HOREQCNTUTRAN

The number of handover required sent to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOREQCNTUTRAN

Source Section

NUCELLREL

HORTTOCH

handover attempts where MS returns to the old channel. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HORTTOCH

Source Section

NECELLREL,NICELLREL

HORTTOCHUTRAN

The number of handover attempts to the neighbouring UTRAN cell resulting in the MS returning to the old channel on the GSM cell.

Data Source

BSC_IQG20_APG40

Source Field

HORTTOCHUTRAN

Source Section

NUCELLREL

HOSUCBCL

successful assignment HOs to better cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCBCL

Source Section

NICELASS,NECELASS

HOSUCHR

Number of successful handovers at high handover rate. When Neighbour cell type NBTYPE=I (Internal) Object type = NICELHOEX (Handover Attempts to Internal Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load and when NETYPE=E (External) NECELHOEX (Handover Attempts to External Neighbouring Cells at High Handover Rate and Classifying Serving Cells) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCHR

Source Section

NICELHOEX,NECELHOEX

HOSUCWCL

successful assignment HOs to worse cell. When Neighbour cell type NBTYPE=I (Internal) NICELASS (Assignment Handovers to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELASS (Assignment Handovers to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOSUCWCL

Source Section

NICELASS,NECELASS

HOTOHCS

Number of non-urgency handovers to internal cell due to Hierarchical Cell Structure (HCS).When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOHCS

Source Section

NECELHO,NECELHO

HOTOKCL

Number of handovers to better K-cell . When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOKCL

Source Section

NECELHO,NECELHO

HOTOLCL

Number of handovers to better L-cell . When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOTOLCL

Source Section

NECELHO,NECELHO

HOUPLQA

Number of handovers at bad uplink quality. When Neighbour cell type NBTYPE=I (Internal) NICELHO (Handover to Internal Neighbouring Cell) will load and when NETYPE=E (External) NECELHO (Handover to External Neighbouring Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOUPLQA

Source Section

NECELHO,NECELHO

HOVERCNT

Handover Atts to NCELL. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOVERCNT

Source Section

NECELLREL,NICELLREL

HOVERCNTUTRAN

The number of handover attempts to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOVERCNTUTRAN

Source Section

NUCELLREL

HOVERSUC

Succ Handover to NCELL. When Neighbour cell type NBTYPE=I (Internal) NCELLREL (Handover to Neighbouring Internal Cell) will load and when NETYPE=E (External) NECELLREL (Handover to Neighbouring External Cell) will load. NBTYPE is an internal Counter to choose internal or external Handover.

Data Source

BSC_IQG20_APG40

Source Field

HOVERSUC

Source Section

NECELLREL,NICELLREL

HOVERSUCUTRAN

The number of successful handovers to the neighbouring UTRAN cell.

Data Source

BSC_IQG20_APG40

Source Field

HOVERSUCUTRAN

Source Section

NUCELLREL

NBTYPE

Neighbour cell type (I - Internal, E - External)

PERLEN

Period Length

SUCURGHOUTRAN

Number of successful handover attempts to the neighbour UTRAN FDD cell in case of urgency conditions.

Data Source

BSC_IQG20_APG40

Source Field

SUCURGHOUTRAN

Source Section

NUCELLREL

URGHOVERUTRAN

Number of handover attempts to the neighbour UTRAN FDD cell in case of urgency conditions.

Data Source

BSC_IQG20_APG40

Source Field

URGHOVERUTRAN

Source Section

NUCELLREL

NI Primitive Calculations

The following is a list of primitive calculations for the NI entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ProblemCode Primitive Calculations

The following is a list of primitive calculations for the ProblemCode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

`PERLEN / (1.0 * 60)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

`isNull(PERLEN) ? nullString() : "EricssonGSM"`

ProblemCode Peg Counts

The following is a list of peg counts for the ProblemCode entity.

MSC_RELEASE

Release

NERRSIT

Number of protocol error situations not resulting in abort sending

Data Source

MSC_IOG20_APG40

Source Field

NERRSIT

Source Section

TCABO

PERLEN

Period Length

RECEIVED

Number of aborts received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCABO

SENT

Number of aborts sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCABO

QOS Primitive Calculations

The following is a list of primitive calculations for the QOS entity.

Ave_LLC_PDU_per_TBF

Average LLC-PDU per TBF (kb)

Calculation

$\text{NUMBERLLCPDU} / (1.0 * \text{NUMBERTBF})$

Ave_LLC_PDU_Throughput

Average LLC-PDU Throughput (kb/s)

Calculation

$\text{NUMBERLLCPDU} / (1.0 * \text{PFCLIFETIME})$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

$\text{PERLEN} / (1.0 * 60)$

LocalName

BSCQOS Name

Calculation

LocalKey

Nof_TBF

No. of TBFs

Calculation

NUMBERTBF

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

QOS Peg Counts

The following is a list of peg counts for the QOS entity.

BSS_RELEASE

Release

NUMBERLLCPDU

Acc nr of LLC PDU octets transmitted by active PFCs with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

NUMBERLLCPDU

Source Section

BSCQOS

NUMBERTBF

Accumulated nr of TBFs that have carried active PFCs with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

NUMBERTBF

Source Section

BSCQOS

PERLEN

Period Length

PFCLIFETIME

Accumulated transmission time of all the LLC PDUs transmitted during an active PFC with a specific combination

Data Source

BSC_IQG20_APG40

Source Field

PFCLIFETIME

Source Section

BSCQOS

Radio Primitive Calculations

The following is a list of primitive calculations for the Radio entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Radio Peg Counts

The following is a list of peg counts for the Radio entity.

Transiver_ID

Transiver ID , Integer between 0 and 11

Source Section

MOTS

RNCSTAT Primitive Calculations

The following is a list of primitive calculations for the RNCSTAT entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

RNCSTAT Peg Counts

The following is a list of peg counts for the RNCSTAT entity.

MSC_RELEASE

Release

NBSTSSMTOT

Number of received reset messages.

Data Source

MSC_IQG20_APG40

Source Field

NBSTSSMTOT

Source Section

RNCSTAT

NRNFRMSCCI

Number of successful RAB assignments for call from mobile subscriber.

Data Source

MSC_IQG20_APG40

Source Field

NRNFRMSCCI

Source Section

RNCSTAT

NRNFRMTOTI

Number of successful RAB assignments for call to mobile subscriber.

Data Source

MSC_IOG20_APG40

Source Field

NRNFRMTOTI

Source Section

RNCSTAT

NRNFRRRTOT

Number of received Reset Resource messages.

Data Source

MSC_IOG20_APG40

Source Field

NRNFRRRTOT

Source Section

RNCSTAT

NRNTIHRSUCC

Number of successful incoming relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTIHRSUCC

Source Section

RNCSTAT

NRNTIHRUSUCC

Number of successful incoming relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTIHRUSUCC

Source Section

RNCSTAT

NRNTLRCTOT

Number of Location Reporting Control messages sent.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRCTOT

Source Section

RNCSTAT

NRNTLRDRTOT

Number of Location Related Data Request messages sent.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRDRTOT

Source Section

RNCSTAT

NRNTLRDSUCC

Number of Location Related Data Response messages or Location Related Data Failure messages received.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRDSUCC

Source Section

RNCSTAT

NRNTLRSUCC

Number of Location Report messages containing Geographical Co-ordinates received.

Data Source

MSC_IOG20_APG40

Source Field

NRNTLRSUCC

Source Section

RNCSTAT

NRNTOHRSUCC

Number of successful outgoing relocation to the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTOHRSUCC

Source Section

RNCSTAT

NRNTOMSCCO

Total number of RAB assignments for call from mobile subscriber.

Data Source

MSC_IOG20_APG40

Source Field

NRNTOMSCCO

Source Section

RNCSTAT

NRNTOMTOTO

Total number of RAB assignments for call to mobile subscriber.

Data Source

MSC_IOG20_APG40

Source Field

NRNTOMTOTO

Source Section

RNCSTAT

NRNTORGSUCC

Number of successful outgoing UMTS to GSM handover from the RNC.

Data Source

MSC_IOG20_APG40

Source Field

NRNTORGSUCC

Source Section

RNCSTAT

NRNTORRTOT

Number of sent Reset Resource messages.

Data Source

MSC_IOG20_APG40

Source Field

NRNTORRTOT

Source Section

RNCSTAT

NRNTRRCTOT

Number of received relocation cancel messages per source RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRCTOT

Source Section

RNCSTAT

NRNTRRRGTOT

Number of relocation required messages received for UMTS to GSM handover.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRRGTOT

Source Section

RNCSTAT

NRNTRRRTOT

Number of relocation required messages received.

Data Source

MSC_IQG20_APG40

Source Field

NRNTRRRTOT

Source Section

RNCSTAT

NRNTSRRTOT

Number of relocation request messages sent to the target RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTSRRTOT

Source Section

RNCSTAT

NRNTSRRUTOT

Number of relocation request messages sent to the target RNC.

Data Source

MSC_IQG20_APG40

Source Field

NRNTSRRUTOT

Source Section

RNCSTAT

PERLEN

Period Length

RXOTS Primitive Calculations

The following is a list of primitive calculations for the RXOTS entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

RXOTS Peg Counts

The following is a list of peg counts for the RXOTS entity.

BSS_RELEASE

Release

CONCNT

Connection set up attempt

Data Source

BSC_IQG20_APG40

Source Field

CONCNT

Source Section

MOTS

CONERRCNT

Time out or radio link failure

Data Source

BSC_IQG20_APG40

Source Field

CONERRCNT

Source Section

MOTS

ID1_MOTS

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTS

ID2_MOTS

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTS

PERLEN

Period Length

SAE Primitive Calculations

The following is a list of primitive calculations for the SAE entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SAE Peg Counts

The following is a list of peg counts for the SAE entity.

ID1_MSC_SAE

Block number

Data Source

MSC_IOG20_APG40

Source Field

ID1

Source Section

SAE

ID2_MSC_SAE

SAE 500

Data Source

MSC_IOG20_APG40

Source Field

ID2

Source Section

SAE

MSC_RELEASE

Release

NCALLS_MSC_SAE

Number of seizure attempts

Data Source

MSC_IOG20_APG40

Source Field

NCALLS

Source Section

SAE

NIND_MSC_SAE

Number of individuals received during successful size alteration

Data Source

MSC_IOG20_APG40

Source Field

NIND

Source Section

SAE

NOVERFLOW_MSC_SAE

Number of seizure attempts with congestion

Data Source

MSC_IOG20_APG40

Source Field

NOVERFLOW

Source Section

SAE

NSCAN_MSC_SAE

Number of accumulations

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

SAE

NTRAL_MSC_SAE

Number of SAE 500 individuals seized at a given instant

Data Source

MSC_IOG20_APG40

Source Field

NTRAL

Source Section

SAE

NTRALACC_MSC_SAE

Accumulated value of NTRAL obtained during NSCAN scans

Data Source

MSC_I0G20_APG40

Source Field

NTRALACC

Source Section

SAE

PERLEN

Period Length

SAE_Block Primitive Calculations

The following is a list of primitive calculations for the SAE_Block entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ServFeature_MSC Primitive Calculations

The following is a list of primitive calculations for the ServFeature_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ServFeature_MSC Peg Counts

The following is a list of peg counts for the ServFeature_MSC entity.

NSERVFEATINV

Number of successful invocations of a service feature

SGSN_MSC Primitive Calculations

The following is a list of primitive calculations for the SGSN_MSC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SGSN_MSC Peg Counts

The following is a list of peg counts for the SGSN_MSC entity.

NPAG1SGSNTOT

Number of first page attempts to an SGSN

NPAG2SGSNTOT

Number of repeated page attempts to an SGSN

NSGSNRESETREC

Number of received Reset messages for each SGSN

NSGSNRESETSENT

Number of sent Reset messages for each SGSN

SPG Primitive Calculations

The following is a list of primitive calculations for the SPG entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SPNode Primitive Calculations

The following is a list of primitive calculations for the SPNode entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SPNode Peg Counts

The following is a list of peg counts for the SPNode entity.

ACCFRPM

Free memory storage (kbytes), accumulated

Data Source

BSC_IQG20_APG40

Source Field

ACCFRPM

Source Section

SPSP

ACCLOAD

CPU load (percent), accumulated. The measurements are made from priority level 6 and upwards

Data Source

BSC_IQG20_APG40

Source Field

ACCLOAD

Source Section

SPSP

ACCSPIST

Accumulated time (in minutes) when the SP has been in state ISOLATED

Data Source

BSC_IQG20_APG40

Source Field

ACCSPIST

Source Section

SPSP

BSS_RELEASE

Release

DATALOSTFLAG_SPSP

Lost data flag

Data Source

BSC_IQG20_APG40

Source Field

DATALOSTFLAG

Source Section

SPSP

MAXFRPM

Maximum memory free storage (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

MAXFRPM

Source Section

SPSP

MINFRPM

Minimum free memory storage (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

MINFRPM

Source Section

SPSP

NOLRGUPFMS

Number of ordered large updates of FMS

Data Source

BSC_IQG20_APG40

Source Field

NOLRGUPFMS

Source Section

SPSP

NOSMUPFMS

Number of ordered small updates of FMS

Data Source

BSC_IQG20_APG40

Source Field

NOSMUPFMS

Source Section

SPSP

NPERREL

Number of performed restarts with reload

Data Source

BSC_IQG20_APG40

Source Field

NPERREL

Source Section

SPSP

NPERRES

Number of performed restarts without reload

Data Source

BSC_IOG20_APG40

Source Field

NPERRES

Source Section

SPSP

NRELA_SPSP

Number of ordered restarts with reload, automatically initiated

Data Source

BSC_IOG20_APG40

Source Field

NRELA

Source Section

SPSP

NRELM_SPSP

Number of ordered restarts with reload, manually initiated

Data Source

BSC_IOG20_APG40

Source Field

NRELM

Source Section

SPSP

NRESA

Number of ordered restarts without reload, automatically initiated

Data Source

BSC_IOG20_APG40

Source Field

NRESA

Source Section

SPSP

NRESM

Number of ordered restarts without reload, manually initiated

Data Source

BSC_IOG20_APG40

Source Field

NRESM

Source Section

SPSP

NSCAN

Number of accumulations (scannings)

Data Source

BSC_IOG20_APG40

Source Field

NSCAN

Source Section

SPSP

PERLEN

Period Length

SIZEPM

Total storage allocated (kbytes)

Data Source

BSC_IQG20_APG40

Source Field

SIZEPM

Source Section

SPSP

Subcell Primitive Calculations

The following is a list of primitive calculations for the Subcell entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Subcell Peg Counts

The following is a list of peg counts for the Subcell entity.

AMR_Connection_Filter

AMR Connection Filter

Data Source

AMR Connection Filter

BSPOWER_10Range_10

BTS transmit power level cell data record in the range -10 dB

Data Source

BSPOWER(-10,-10)

BSPOWER_12Range_12

BTS transmit power level cell data record in the range -12 dB

Data Source

BSPOWER(-12,-12)

BSPOWER_14Range_14

BTS transmit power level cell data record in the range -14 dB

Data Source

BSPOWER(-14,-14)

BSPOWER_16Range_16

BTS transmit power level cell data record in the range -16 dB

Data Source

BSPOWER(-16,-16)

BSPOWER_18Range_18

BTS transmit power level cell data record in the range -18 dB

Data Source

BSPOWER(-18,-18)

BSPOWER_20Range_20

BTS transmit power level cell data record in the range -20 dB

Data Source

BSPOWER(-20,-20)

BSPOWER_22Range_22

BTS transmit power level cell data record in the range -22 dB

Data Source

BSPOWER(-22,-22)

BSPOWER_24Range_24

BTS transmit power level cell data record in the range -24 dB

Data Source

BSPOWER(-24,-24)

BSPOWER_26Range_26

BTS transmit power level cell data record in the range -26 dB

Data Source

BSPOWER(-26,-26)

BSPOWER_28Range_28

BTS transmit power level cell data record in the range -28 dB

Data Source

BSPOWER(-28,-28)

BSPOWER_2Range_2

BTS transmit power level cell data record in the range -2 dB

Data Source

BSPOWER(-2,-2)

BSPOWER_30Range_30

BTS transmit power level cell data record in the range -30 dB

Data Source

BSPOWER(-30,-30)

BSPOWER_4Range_4

BTS transmit power level cell data record in the range -4 dB

Data Source

BSPOWER(-4,-4)

BSPOWER_6Range_6

BTS transmit power level cell data record in the range -6 dB

Data Source

BSPOWER(-6,-6)

BSPOWER_8Range_8

BTS transmit power level cell data record in the range -8 dB

Data Source

BSPOWER(-8,-8)

BSPOWER0Range0

BTS transmit power level cell data record in the range 0 dB

Data Source

BSPOWER(0,0)

CellSetName

Name of the cell set that this cell appears in

Data Source

Cell Set Name

MSPOWER0Range0

MS transmit power level cell data record in the range 0 dBm

Data Source

MSPOWER(0,0)

MSPOWER10Range10

MS transmit power level cell data record in the range 10 dBm

Data Source

MSPOWER(10,10)

MSPOWER11Range11

MS transmit power level cell data record in the range 11 dBm

Data Source

MSPOWER(11,11)

MSPOWER12Range12

MS transmit power level cell data record in the range 12 dBm

Data Source

MSPOWER(12,12)

MSPOWER13Range13

MS transmit power level cell data record in the range 13 dBm

Data Source

MSPOWER(13,13)

MSPOWER14Range14

MS transmit power level cell data record in the range 14 dBm

Data Source

MSPOWER(14,14)

MSPOWER15Range15

MS transmit power level cell data record in the range 15 dBm

Data Source

MSPOWER(15,15)

MSPOWER16Range16

MS transmit power level cell data record in the range 16 dBm

Data Source

MSPOWER(16,16)

MSPOWER17Range17

MS transmit power level cell data record in the range 17 dBm

Data Source

MSPOWER(17,17)

MSPOWER18Range18

MS transmit power level cell data record in the range 18 dBm

Data Source

MSPOWER(18,18)

MSPOWER19Range19

MS transmit power level cell data record in the range 19 dBm

Data Source

MSPOWER(19,19)

MSPOWER1Range1

MS transmit power level cell data record in the range 1 dBm

Data Source

MSPOWER(1,1)

MSPOWER20Range20

MS transmit power level cell data record in the range 20 dBm

Data Source

MSPOWER(20,20)

MSPOWER21Range21

MS transmit power level cell data record in the range 21 dBm

Data Source

MSPOWER(21,21)

MSPOWER22Range22

MS transmit power level cell data record in the range 22 dBm

Data Source

MSPOWER(22,22)

MSPOWER23Range23

MS transmit power level cell data record in the range 23 dBm

Data Source

MSPOWER(23,23)

MSPOWER24Range24

MS transmit power level cell data record in the range 24 dBm

Data Source

MSPOWER(24,24)

MSPOWER25Range25

MS transmit power level cell data record in the range 25 dBm

Data Source

MSPOWER(25,25)

MSPOWER26Range26

MS transmit power level cell data record in the range 26 dBm

Data Source

MSPOWER(26,26)

MSPOWER27Range27

MS transmit power level cell data record in the range 27 dBm

Data Source

MSPOWER(27,27)

MSPOWER28Range28

MS transmit power level cell data record in the range 28 dBm

Data Source

MSPOWER(28,28)

MSPOWER29Range29

MS transmit power level cell data record in the range 29 dBm

Data Source

MSPOWER(29,29)

MSPOWER2Range2

MS transmit power level cell data record in the range 2 dBm

Data Source

MSPOWER(2,2)

MSPOWER30Range30

MS transmit power level cell data record in the range 30 dBm

Data Source

MSPOWER(30,30)

MSPOWER31Range31

MS transmit power level cell data record in the range 31 dBm

Data Source

MSPOWER(31,31)

MSPOWER32Range32

MS transmit power level cell data record in the range 32 dBm

Data Source

MSPOWER(32,32)

MSPOWER33Range33

MS transmit power level cell data record in the range 33 dBm

Data Source

MSPOWER(33,33)

MSPOWER34Range34

MS transmit power level cell data record in the range 34 dBm

Data Source

MSPOWER(34,34)

MSPOWER35Range35

MS transmit power level cell data record in the range 35 dBm

Data Source

MSPOWER(35,35)

MSPOWER36Range36

MS transmit power level cell data record in the range 36 dBm

Data Source

MSPOWER(36,36)

MSPOWER37Range37

MS transmit power level cell data record in the range 37 dBm

Data Source

MSPOWER(37,37)

MSPOWER38Range38

MS transmit power level cell data record in the range 38 dBm

Data Source

MSPOWER(38,38)

MSPOWER39Range39

MS transmit power level cell data record in the range 39 dBm

Data Source

MSPOWER(39,39)

MSPOWER3Range3

MS transmit power level cell data record in the range 3 dBm

Data Source

MSPOWER(3,3)

MSPOWER4Range4

MS transmit power level cell data record in the range 4 dBm

Data Source

MSPOWER(4,4)

MSPOWER5Range5

MS transmit power level cell data record in the range 5 dBm

Data Source

MSPOWER(5,5)

MSPOWER6Range6

MS transmit power level cell data record in the range 6 dBm

Data Source

MSPOWER(6,6)

MSPOWER7Range7

MS transmit power level cell data record in the range 7 dBm

Data Source

MSPOWER(7,7)

MSPOWER8Range8

MS transmit power level cell data record in the range 8 dBm

Data Source

MSPOWER(8,8)

MSPOWER9Range9

MS transmit power level cell data record in the range 9 dBm

Data Source

MSPOWER(9,9)

noOfMeasFiltered

Number of filtered measurements

Data Source

noOfMeasFiltered

noOfMeasUnfiltered

Number of unfiltered measurement

Data Source

noOfMeasUnfiltered

PATHLOSSDIFF_10Range_10

Path loss difference between downlink and uplink in the range -10 dB

Data Source

PATHLOSSDIFF(-10,-10)

PATHLOSSDIFF_11Range_11

Path loss difference between downlink and uplink in the range -11 dB

Data Source

PATHLOSSDIFF(-11,-11)

PATHLOSSDIFF_12Range_12

Path loss difference between downlink and uplink in the range -12 dB

Data Source

PATHLOSSDIFF(-12,-12)

PATHLOSSDIFF_13Range_13

Path loss difference between downlink and uplink in the range -13 dB

Data Source

PATHLOSSDIFF(-13,-13)

PATHLOSSDIFF_14Range_14

Path loss difference between downlink and uplink in the range -14 dB

Data Source

PATHLOSSDIFF(-14,-14)

PATHLOSSDIFF_15Range_15

Path loss difference between downlink and uplink in the range -15 dB

Data Source

PATHLOSSDIFF(-15,-15)

PATHLOSSDIFF_16Range_16

Path loss difference between downlink and uplink in the range -16 dB

Data Source

PATHLOSSDIFF(-16,-16)

PATHLOSSDIFF_17Range_17

Path loss difference between downlink and uplink in the range -17 dB

Data Source

PATHLOSSDIFF(-17,-17)

PATHLOSSDIFF_18Range_18

Path loss difference between downlink and uplink in the range -18 dB

Data Source

PATHLOSSDIFF(-18,-18)

PATHLOSSDIFF_19Range_19

Path loss difference between downlink and uplink in the range -19 dB

Data Source

PATHLOSSDIFF(-19,-19)

PATHLOSSDIFF_1Range_1

Path loss difference between downlink and uplink in the range -1 dB

Data Source

PATHLOSSDIFF(-1,-1)

PATHLOSSDIFF_20Range_20

Path loss difference between downlink and uplink in the range -20 dB

Data Source

PATHLOSSDIFF(-20,-20)

PATHLOSSDIFF_21Range_21

Path loss difference between downlink and uplink in the range -21 dB

Data Source

PATHLOSSDIFF(-21,-21)

PATHLOSSDIFF_22Range_22

Path loss difference between downlink and uplink in the range -22 dB

Data Source

PATHLOSSDIFF(-22,-22)

PATHLOSSDIFF_23Range_23

Path loss difference between downlink and uplink in the range -23 dB

Data Source

PATHLOSSDIFF(-23,-23)

PATHLOSSDIFF_24Range_24

Path loss difference between downlink and uplink in the range -24 dB

Data Source

PATHLOSSDIFF(-24,-24)

PATHLOSSDIFF_25Range_25

Path loss difference between downlink and uplink in the range -25 dB

Data Source

PATHLOSSDIFF(-25,-25)

PATHLOSSDIFF_2Range_2

Path loss difference between downlink and uplink in the range -2 dB

Data Source

PATHLOSSDIFF(-2,-2)

PATHLOSSDIFF_3Range_3

Path loss difference between downlink and uplink in the range -3 dB

Data Source

PATHLOSSDIFF(-3,-3)

PATHLOSSDIFF_4Range_4

Path loss difference between downlink and uplink in the range -4 dB

Data Source

PATHLOSSDIFF(-4,-4)

PATHLOSSDIFF_5Range_5

Path loss difference between downlink and uplink in the range -5 dB

Data Source

PATHLOSSDIFF(-5,-5)

PATHLOSSDIFF_6Range_6

Path loss difference between downlink and uplink in the range -6 dB

Data Source

PATHLOSSDIFF(-6,-6)

PATHLOSSDIFF_7Range_7

Path loss difference between downlink and uplink in the range -7 dB

Data Source

PATHLOSSDIFF(-7,-7)

PATHLOSSDIFF_8Range_8

Path loss difference between downlink and uplink in the range -8 dB

Data Source

PATHLOSSDIFF(-8,-8)

PATHLOSSDIFF_9Range_9

Path loss difference between downlink and uplink in the range -9 dB

Data Source

PATHLOSSDIFF(-9,-9)

PATHLOSSDIFF0Range0

Path loss difference between downlink and uplink in the range 0 dB

Data Source

PATHLOSSDIFF(0,0)

PATHLOSSDIFF10Range10

Path loss difference between downlink and uplink in the range 10 dB

Data Source

PATHLOSSDIFF(10,10)

PATHLOSSDIFF11Range11

Path loss difference between downlink and uplink in the range 11 dB

Data Source

PATHLOSSDIFF(11,11)

PATHLOSSDIFF12Range12

Path loss difference between downlink and uplink in the range 12 dB

Data Source

PATHLOSSDIFF(12,12)

PATHLOSSDIFF13Range13

Path loss difference between downlink and uplink in the range 13 dB

Data Source

PATHLOSSDIFF(13,13)

PATHLOSSDIFF14Range14

Path loss difference between downlink and uplink in the range 14 dB

Data Source

PATHLOSSDIFF(14,14)

PATHLOSSDIFF15Range15

Path loss difference between downlink and uplink in the range 15 dB

Data Source

PATHLOSSDIFF(15,15)

PATHLOSSDIFF16Range16

Path loss difference between downlink and uplink in the range 16 dB

Data Source

PATHLOSSDIFF(16,16)

PATHLOSSDIFF17Range17

Path loss difference between downlink and uplink in the range 17 dB

Data Source

PATHLOSSDIFF(17,17)

PATHLOSSDIFF18Range18

Path loss difference between downlink and uplink in the range 18 dB

Data Source

PATHLOSSDIFF(18,18)

PATHLOSSDIFF19Range19

Path loss difference between downlink and uplink in the range 19 dB

Data Source

PATHLOSSDIFF(19,19)

PATHLOSSDIFF1Range1

Path loss difference between downlink and uplink in the range 1 dB

Data Source

PATHLOSSDIFF(1,1)

PATHLOSSDIFF20Range20

Path loss difference between downlink and uplink in the range 20 dB

Data Source

PATHLOSSDIFF(20,20)

PATHLOSSDIFF21Range21

Path loss difference between downlink and uplink in the range 21 dB

Data Source

PATHLOSSDIFF(21,21)

PATHLOSSDIFF22Range22

Path loss difference between downlink and uplink in the range 22 dB

Data Source

PATHLOSSDIFF(22,22)

PATHLOSSDIFF23Range23

Path loss difference between downlink and uplink in the range 23 dB

Data Source

PATHLOSSDIFF(23,23)

PATHLOSSDIFF24Range24

Path loss difference between downlink and uplink in the range 24 dB

Data Source

PATHLOSSDIFF(24,24)

PATHLOSSDIFF25Range25

Path loss difference between downlink and uplink in the range 25 dB

Data Source

PATHLOSSDIFF(25,25)

PATHLOSSDIFF2Range2

Path loss difference between downlink and uplink in the range 2 dB

Data Source

PATHLOSSDIFF(2,2)

PATHLOSSDIFF3Range3

Path loss difference between downlink and uplink in the range 3 dB

Data Source

PATHLOSSDIFF(3,3)

PATHLOSSDIFF4Range4

Path loss difference between downlink and uplink in the range 4 dB

Data Source

PATHLOSSDIFF(4,4)

PATHLOSSDIFF5Range5

Path loss difference between downlink and uplink in the range 5 dB

Data Source

PATHLOSSDIFF(5,5)

PATHLOSSDIFF6Range6

Path loss difference between downlink and uplink in the range 6 dB

Data Source

PATHLOSSDIFF(6,6)

PATHLOSSDIFF7Range7

Path loss difference between downlink and uplink in the range 7 dB

Data Source

PATHLOSSDIFF(7,7)

PATHLOSSDIFF8Range8

Path loss difference between downlink and uplink in the range 8 dB

Data Source

PATHLOSSDIFF(8,8)

PATHLOSSDIFF9Range9

Path loss difference between downlink and uplink in the range 9 dB

Data Source

PATHLOSSDIFF(9,9)

PATHLOSSDL100Range101

Downlink Path Loss Cell Data in the range 100 to 101 dB

Data Source

PATHLOSSDL(100,101)

PATHLOSSDL102Range103

Downlink Path Loss Cell Data in the range 102 to 103 dB

Data Source

PATHLOSSDL(102,103)

PATHLOSSDL104Range105

Downlink Path Loss Cell Data in the range 104 to 105 dB

Data Source

PATHLOSSDL(104,105)

PATHLOSSDL106Range107

Downlink Path Loss Cell Data in the range 106 to 107 dB

Data Source

PATHLOSSDL(106,107)

PATHLOSSDL108Range109

Downlink Path Loss Cell Data in the range 108 to 109 dB

Data Source

PATHLOSSDL(108,109)

PATHLOSSDL110Range111

Downlink Path Loss Cell Data in the range 110 to 111 dB

Data Source

PATHLOSSDL(110,111)

PATHLOSSDL112Range113

Downlink Path Loss Cell Data in the range 112 to 113 dB

Data Source

PATHLOSSDL(112,113)

PATHLOSSDL114Range115

Downlink Path Loss Cell Data in the range 114 to 115 dB

Data Source

PATHLOSSDL(114,115)

PATHLOSSDL116Range117

Downlink Path Loss Cell Data in the range 116 to 117 dB

Data Source

PATHLOSSDL(116,117)

PATHLOSSDL118Range119

Downlink Path Loss Cell Data in the range 118 to 119 dB

Data Source

PATHLOSSDL(118,119)

PATHLOSSDL120Range121

Downlink Path Loss Cell Data in the range 120 to 121 dB

Data Source

PATHLOSSDL(120,121)

PATHLOSSDL122Range123

Downlink Path Loss Cell Data in the range 122 to 123 dB

Data Source

PATHLOSSDL(122,123)

PATHLOSSDL124Range125

Downlink Path Loss Cell Data in the range 124 to 125 dB

Data Source

PATHLOSSDL(124,125)

PATHLOSSDL126Range127

Downlink Path Loss Cell Data in the range 126 to 127 dB

Data Source

PATHLOSSDL(126,127)

PATHLOSSDL128Range129

Downlink Path Loss Cell Data in the range 128 to 129 dB

Data Source

PATHLOSSDL(128,129)

PATHLOSSDL130Range131

Downlink Path Loss Cell Data in the range 130 to 131 dB

Data Source

PATHLOSSDL(130,131)

PATHLOSSDL132Range133

Downlink Path Loss Cell Data in the range 132 to 133 dB

Data Source

PATHLOSSDL(132,133)

PATHLOSSDL134Range135

Downlink Path Loss Cell Data in the range 134 to 135 dB

Data Source

PATHLOSSDL(134,135)

PATHLOSSDL136Range137

Downlink Path Loss Cell Data in the range 136 to 137 dB

Data Source

PATHLOSSDL(136,137)

PATHLOSSDL138Range139

Downlink Path Loss Cell Data in the range 138 to 139 dB

Data Source

PATHLOSSDL(138,139)

PATHLOSSDL140Range141

Downlink Path Loss Cell Data in the range 140 to 141 dB

Data Source

PATHLOSSDL(140,141)

PATHLOSSDL142Range143

Downlink Path Loss Cell Data in the range 142 to 143 dB

Data Source

PATHLOSSDL(142,143)

PATHLOSSDL144Range145

Downlink Path Loss Cell Data in the range 144 to 145 dB

Data Source

PATHLOSSDL(144,145)

PATHLOSSDL146Range147

Downlink Path Loss Cell Data in the range 146 to 147 dB

Data Source

PATHLOSSDL(146,147)

PATHLOSSDL148Range149

Downlink Path Loss Cell Data in the range 148 to 149 dB

Data Source

PATHLOSSDL(148,149)

PATHLOSSDL150Range151

Downlink Path Loss Cell Data in the range 150 to 151 dB

Data Source

PATHLOSSDL(150,151)

PATHLOSSDL152Range153

Downlink Path Loss Cell Data in the range 152 to 153 dB

Data Source

PATHLOSSDL(152,153)

PATHLOSSDL154Range155

Downlink Path Loss Cell Data in the range 154 to 155 dB

Data Source

PATHLOSSDL(154,155)

PATHLOSSDL156Range157

Downlink Path Loss Cell Data in the range 156 to 157 dB

Data Source

PATHLOSSDL(156,157)

PATHLOSSDL158Range190

Downlink Path Loss Cell Data in the range 158 to 190 dB

Data Source

PATHLOSSDL(158,190)

PATHLOSSDL30Range31

Downlink Path Loss Cell Data in the range 30 to 31 dB

Data Source

PATHLOSSDL(30,31)

PATHLOSSDL32Range33

Downlink Path Loss Cell Data in the range 32 to 33 dB

Data Source

PATHLOSSDL(32,33)

PATHLOSSDL34Range35

Downlink Path Loss Cell Data in the range 34 to 35 dB

Data Source

PATHLOSSDL(34,35)

PATHLOSSDL36Range37

Downlink Path Loss Cell Data in the range 36 to 37 dB

Data Source

PATHLOSSDL(36,37)

PATHLOSSDL38Range39

Downlink Path Loss Cell Data in the range 38 to 39 dB

Data Source

PATHLOSSDL(38,39)

PATHLOSSDL40Range41

Downlink Path Loss Cell Data in the range 40 to 41 dB

Data Source

PATHLOSSDL(40,41)

PATHLOSSDL42Range43

Downlink Path Loss Cell Data in the range 42 to 43 dB

Data Source

PATHLOSSDL(42,43)

PATHLOSSDL44Range45

Downlink Path Loss Cell Data in the range 44 to 45 dB

Data Source

PATHLOSSDL(44,45)

PATHLOSSDL46Range47

Downlink Path Loss Cell Data in the range 46 to 47 dB

Data Source

PATHLOSSDL(46,47)

PATHLOSSDL48Range49

Downlink Path Loss Cell Data in the range 48 to 49 dB

Data Source

PATHLOSSDL(48,49)

PATHLOSSDL50Range51

Downlink Path Loss Cell Data in the range 50 to 51 dB

Data Source

PATHLOSSDL(50,51)

PATHLOSSDL52Range53

Downlink Path Loss Cell Data in the range 52 to 53 dB

Data Source

PATHLOSSDL(52,53)

PATHLOSSDL54Range55

Downlink Path Loss Cell Data in the range 54 to 55 dB

Data Source

PATHLOSSDL(54,55)

PATHLOSSDL56Range57

Downlink Path Loss Cell Data in the range 56 to 57 dB

Data Source

PATHLOSSDL(56,57)

PATHLOSSDL58Range59

Downlink Path Loss Cell Data in the range 58 to 59 dB

Data Source

PATHLOSSDL(58,59)

PATHLOSSDL60Range61

Downlink Path Loss Cell Data in the range 60 to 61 dB

Data Source

PATHLOSSDL(60,61)

PATHLOSSDL62Range63

Downlink Path Loss Cell Data in the range 62 to 63 dB

Data Source

PATHLOSSDL(62,63)

PATHLOSSDL64Range65

Downlink Path Loss Cell Data in the range 64 to 65 dB

Data Source

PATHLOSSDL(64,65)

PATHLOSSDL66Range67

Downlink Path Loss Cell Data in the range 66 to 67 dB

Data Source

PATHLOSSDL(66,67)

PATHLOSSDL68Range69

Downlink Path Loss Cell Data in the range 68 to 69 dB

Data Source

PATHLOSSDL(68,69)

PATHLOSSDL70Range71

Downlink Path Loss Cell Data in the range 70 to 71 dB

Data Source

PATHLOSSDL(70,71)

PATHLOSSDL72Range73

Downlink Path Loss Cell Data in the range 72 to 73 dB

Data Source

PATHLOSSDL(72,73)

PATHLOSSDL74Range75

Downlink Path Loss Cell Data in the range 74 to 75 dB

Data Source

PATHLOSSDL(74,75)

PATHLOSSDL76Range77

Downlink Path Loss Cell Data in the range 76 to 77 dB

Data Source

PATHLOSSDL(76,77)

PATHLOSSDL78Range79

Downlink Path Loss Cell Data in the range 78 to 79 dB

Data Source

PATHLOSSDL(78,79)

PATHLOSSDL80Range81

Downlink Path Loss Cell Data in the range 80 to 81 dB

Data Source

PATHLOSSDL(80,81)

PATHLOSSDL82Range83

Downlink Path Loss Cell Data in the range 82 to 83 dB

Data Source

PATHLOSSDL(82,83)

PATHLOSSDL84Range85

Downlink Path Loss Cell Data in the range 84 to 85 dB

Data Source

PATHLOSSDL(84,85)

PATHLOSSDL86Range87

Downlink Path Loss Cell Data in the range 86 to 87 dB

Data Source

PATHLOSSDL(86,87)

PATHLOSSDL88Range89

Downlink Path Loss Cell Data in the range 88 to 89 dB

Data Source

PATHLOSSDL(88,89)

PATHLOSSDL90Range91

Downlink Path Loss Cell Data in the range 90 to 91 dB

Data Source

PATHLOSSDL(90,91)

PATHLOSSDL92Range93

Downlink Path Loss Cell Data in the range 92 to 93 dB

Data Source

PATHLOSSDL(92,93)

PATHLOSSDL94Range95

Downlink Path Loss Cell Data in the range 94 to 95 dB

Data Source

PATHLOSSDL(94,95)

PATHLOSSDL96Range97

Downlink Path Loss Cell Data in the range 96 to 97 dB

Data Source

PATHLOSSDL(96,97)

PATHLOSSDL98Range99

Downlink Path Loss Cell Data in the range 98 to 99 dB

Data Source

PATHLOSSDL(98,99)

PATHLOSSUL100Range101

Uplink Path Loss Cell Data in the range 100 to 101 dB

Data Source

PATHLOSSUL(100,101)

PATHLOSSUL102Range103

Uplink Path Loss Cell Data in the range 102 to 103 dB

Data Source

PATHLOSSUL(102,103)

PATHLOSSUL104Range105

Uplink Path Loss Cell Data in the range 104 to 105 dB

Data Source

PATHLOSSUL(104,105)

PATHLOSSUL106Range107

Uplink Path Loss Cell Data in the range 106 to 107 dB

Data Source

PATHLOSSUL(106,107)

PATHLOSSUL108Range109

Uplink Path Loss Cell Data in the range 108 to 109 dB

Data Source

PATHLOSSUL(108,109)

PATHLOSSUL110Range111

Uplink Path Loss Cell Data in the range 110 to 111 dB

Data Source

PATHLOSSUL(110,111)

PATHLOSSUL112Range113

Uplink Path Loss Cell Data in the range 112 to 113 dB

Data Source

PATHLOSSUL(112,113)

PATHLOSSUL114Range115

Uplink Path Loss Cell Data in the range 114 to 115 dB

Data Source

PATHLOSSUL(114,115)

PATHLOSSUL116Range117

Uplink Path Loss Cell Data in the range 116 to 117 dB

Data Source

PATHLOSSUL(116,117)

PATHLOSSUL118Range119

Uplink Path Loss Cell Data in the range 118 to 119 dB

Data Source

PATHLOSSUL(118,119)

PATHLOSSUL120Range121

Uplink Path Loss Cell Data in the range 120 to 121 dB

Data Source

PATHLOSSUL(120,121)

PATHLOSSUL122Range123

Uplink Path Loss Cell Data in the range 122 to 123 dB

Data Source

PATHLOSSUL(122,123)

PATHLOSSUL124Range125

Uplink Path Loss Cell Data in the range 124 to 125 dB

Data Source

PATHLOSSUL(124,125)

PATHLOSSUL126Range127

Uplink Path Loss Cell Data in the range 126 to 127 dB

Data Source

PATHLOSSUL(126,127)

PATHLOSSUL128Range129

Uplink Path Loss Cell Data in the range 128 to 129 dB

Data Source

PATHLOSSUL(128,129)

PATHLOSSUL130Range131

Uplink Path Loss Cell Data in the range 130 to 131 dB

Data Source

PATHLOSSUL(130,131)

PATHLOSSUL132Range133

Uplink Path Loss Cell Data in the range 132 to 133 dB

Data Source

PATHLOSSUL(132,133)

PATHLOSSUL134Range135

Uplink Path Loss Cell Data in the range 134 to 135 dB

Data Source

PATHLOSSUL(134,135)

PATHLOSSUL136Range137

Uplink Path Loss Cell Data in the range 136 to 137 dB

Data Source

PATHLOSSUL(136,137)

PATHLOSSUL138Range139

Uplink Path Loss Cell Data in the range 138 to 139 dB

Data Source

PATHLOSSUL(138,139)

PATHLOSSUL140Range141

Uplink Path Loss Cell Data in the range 140 to 141 dB

Data Source

PATHLOSSUL(140,141)

PATHLOSSUL142Range143

Uplink Path Loss Cell Data in the range 142 to 143 dB

Data Source

PATHLOSSUL(142,143)

PATHLOSSUL144Range145

Uplink Path Loss Cell Data in the range 144 to 145 dB

Data Source

PATHLOSSUL(144,145)

PATHLOSSUL146Range147

Uplink Path Loss Cell Data in the range 146 to 147 dB

Data Source

PATHLOSSUL(146,147)

PATHLOSSUL148Range153

Uplink Path Loss Cell Data in the range 148 to 153 dB

Data Source

PATHLOSSUL(148,153)

PATHLOSSUL30Range31

Uplink Path Loss Cell Data in the range 30 to 31 dB

Data Source

PATHLOSSUL(30,31)

PATHLOSSUL32Range33

Uplink Path Loss Cell Data in the range 32 to 33 dB

Data Source

PATHLOSSUL(32,33)

PATHLOSSUL34Range35

Uplink Path Loss Cell Data in the range 34 to 35 dB

Data Source

PATHLOSSUL(34,35)

PATHLOSSUL36Range37

Uplink Path Loss Cell Data in the range 36 to 37 dB

Data Source

PATHLOSSUL(36,37)

PATHLOSSUL38Range39

Uplink Path Loss Cell Data in the range 38 to 39 dB

Data Source

PATHLOSSUL(38,39)

PATHLOSSUL40Range41

Uplink Path Loss Cell Data in the range 40 to 41 dB

Data Source

PATHLOSSUL(40,41)

PATHLOSSUL42Range43

Uplink Path Loss Cell Data in the range 42 to 43 dB

Data Source

PATHLOSSUL(42,43)

PATHLOSSUL44Range45

Uplink Path Loss Cell Data in the range 44 to 45 dB

Data Source

PATHLOSSUL(44,45)

PATHLOSSUL46Range47

Uplink Path Loss Cell Data in the range 46 to 47 dB

Data Source

PATHLOSSUL(46,47)

PATHLOSSUL48Range49

Uplink Path Loss Cell Data in the range 48 to 49 dB

Data Source

PATHLOSSUL(48,49)

PATHLOSSUL50Range51

Uplink Path Loss Cell Data in the range 50 to 51 dB

Data Source

PATHLOSSUL(50,51)

PATHLOSSUL52Range53

Uplink Path Loss Cell Data in the range 52 to 53 dB

Data Source

PATHLOSSUL(52,53)

PATHLOSSUL54Range55

Uplink Path Loss Cell Data in the range 54 to 55 dB

Data Source

PATHLOSSUL(54,55)

PATHLOSSUL56Range57

Uplink Path Loss Cell Data in the range 56 to 57 dB

Data Source

PATHLOSSUL(56,57)

PATHLOSSUL58Range59

Uplink Path Loss Cell Data in the range 58 to 59 dB

Data Source

PATHLOSSUL(58,59)

PATHLOSSUL60Range61

Uplink Path Loss Cell Data in the range 60 to 61 dB

Data Source

PATHLOSSUL(60,61)

PATHLOSSUL62Range63

Uplink Path Loss Cell Data in the range 62 to 63 dB

Data Source

PATHLOSSUL(62,63)

PATHLOSSUL64Range65

Uplink Path Loss Cell Data in the range 64 to 65 dB

Data Source

PATHLOSSUL(64,65)

PATHLOSSUL66Range67

Uplink Path Loss Cell Data in the range 66 to 67 dB

Data Source

PATHLOSSUL(66,67)

PATHLOSSUL68Range69

Uplink Path Loss Cell Data in the range 68 to 69 dB

Data Source

PATHLOSSUL(68,69)

PATHLOSSUL70Range71

Uplink Path Loss Cell Data in the range 70 to 71 dB

Data Source

PATHLOSSUL(70,71)

PATHLOSSUL72Range73

Uplink Path Loss Cell Data in the range 72 to 73 dB

Data Source

PATHLOSSUL(72,73)

PATHLOSSUL74Range75

Uplink Path Loss Cell Data in the range 74 to 75 dB

Data Source

PATHLOSSUL(74,75)

PATHLOSSUL76Range77

Uplink Path Loss Cell Data in the range 76 to 77 dB

Data Source

PATHLOSSUL(76,77)

PATHLOSSUL78Range79

Uplink Path Loss Cell Data in the range 78 to 79 dB

Data Source

PATHLOSSUL(78,79)

PATHLOSSUL80Range81

Uplink Path Loss Cell Data in the range 80 to 81 dB

Data Source

PATHLOSSUL(80,81)

PATHLOSSUL82Range83

Uplink Path Loss Cell Data in the range 82 to 83 dB

Data Source

PATHLOSSUL(82,83)

PATHLOSSUL84Range85

Uplink Path Loss Cell Data in the range 84 to 85 dB

Data Source

PATHLOSSUL(84,85)

PATHLOSSUL86Range87

Uplink Path Loss Cell Data in the range 86 to 87 dB

Data Source

PATHLOSSUL(86,87)

PATHLOSSUL88Range89

Uplink Path Loss Cell Data in the range 88 to 89 dB

Data Source

PATHLOSSUL(88,89)

PATHLOSSUL90Range91

Uplink Path Loss Cell Data in the range 90 to 91 dB

Data Source

PATHLOSSUL(90,91)

PATHLOSSUL92Range93

Uplink Path Loss Cell Data in the range 92 to 93 dB

Data Source

PATHLOSSUL(92,93)

PATHLOSSUL94Range95

Uplink Path Loss Cell Data in the range 94 to 95 dB

Data Source

PATHLOSSUL(94,95)

PATHLOSSUL96Range97

Uplink Path Loss Cell Data in the range 96 to 97 dB

Data Source

PATHLOSSUL(96,97)

PATHLOSSUL98Range99

Uplink Path Loss Cell Data in the range 98 to 99 dB

Data Source

PATHLOSSUL(98,99)

PERLENSEC

Period Length

Data Source

I5VALASLR

RXLEVDL0Range0

Received signal strength downlink in the range -110 dBm

Data Source

RXLEVDL(0,0)

RXLEVDL10Range10

Received signal strength downlink in the range -100 dBm

Data Source

RXLEVDL(10,10)

RXLEVDL11Range11

Received signal strength downlink in the range -99 dBm

Data Source

RXLEVDL(11,11)

RXLEVDL12Range12

Received signal strength downlink in the range -98 dBm

Data Source

RXLEVDL(12,12)

RXLEVDL13Range13

Received signal strength downlink in the range -97 dBm

Data Source

RXLEVDL(13,13)

RXLEVDL14Range14

Received signal strength downlink in the range -96 dBm

Data Source

RXLEVDL(14,14)

RXLEVDL15Range15

Received signal strength downlink in the range -95 dBm

Data Source

RXLEVDL(15,15)

RXLEVDL16Range16

Received signal strength downlink in the range -94 dBm

Data Source

RXLEVDL(16,16)

RXLEVDL17Range17

Received signal strength downlink in the range -93 dBm

Data Source

RXLEVDL(17,17)

RXLEVDL18Range18

Received signal strength downlink in the range -92 dBm

Data Source

RXLEVDL(18,18)

RXLEVDL19Range19

Received signal strength downlink in the range -91 dBm

Data Source

RXLEVDL(19,19)

RXLEVDL1Range1

Received signal strength downlink in the range -109 dBm

Data Source

RXLEVDL(1,1)

RXLEVDL20Range20

Received signal strength downlink in the range -90 dBm

Data Source

RXLEVDL(20,20)

RXLEVDL21Range21

Received signal strength downlink in the range -89 dBm

Data Source

RXLEVDL(21,21)

RXLEVDL22Range22

Received signal strength downlink in the range -88 dBm

Data Source

RXLEVDL(22,22)

RXLEVDL23Range23

Received signal strength downlink in the range -87 dBm

Data Source

RXLEVDL(23,23)

RXLEVDL24Range24

Received signal strength downlink in the range -86 dBm

Data Source

RXLEVDL(24,24)

RXLEVDL25Range25

Received signal strength downlink in the range -85 dBm

Data Source

RXLEVDL(25,25)

RXLEVDL26Range26

Received signal strength downlink in the range -84 dBm

Data Source

RXLEVDL(26,26)

RXLEVDL27Range27

Received signal strength downlink in the range -83 dBm

Data Source

RXLEVDL(27,27)

RXLEVDL28Range28

Received signal strength downlink in the range -82 dBm

Data Source

RXLEVDL(28,28)

RXLEVDL29Range29

Received signal strength downlink in the range -81 dBm

Data Source

RXLEVDL(29,29)

RXLEVDL2Range2

Received signal strength downlink in the range -108 dBm

Data Source

RXLEVDL(2,2)

RXLEVDL30Range30

Received signal strength downlink in the range -80 dBm

Data Source

RXLEVDL(30,30)

RXLEVDL31Range31

Received signal strength downlink in the range -79 dBm

Data Source

RXLEVDL(31,31)

RXLEVDL32Range32

Received signal strength downlink in the range -78 dBm

Data Source

RXLEVDL(32,32)

RXLEVDL33Range33

Received signal strength downlink in the range -77 dBm

Data Source

RXLEVDL(33,33)

RXLEVDL34Range34

Received signal strength downlink in the range -76 dBm

Data Source

RXLEVDL(34,34)

RXLEVDL35Range35

Received signal strength downlink in the range -75 dBm

Data Source

RXLEVDL(35,35)

RXLEVDL36Range36

Received signal strength downlink in the range -74 dBm

Data Source

RXLEVDL(36,36)

RXLEVDL37Range37

Received signal strength downlink in the range -73 dBm

Data Source

RXLEVDL(37,37)

RXLEVDL38Range38

Received signal strength downlink in the range -72 dBm

Data Source

RXLEVDL(38,38)

RXLEVDL39Range39

Received signal strength downlink in the range -71 dBm

Data Source

RXLEVDL(39,39)

RXLEVDL3Range3

Received signal strength downlink in the range -107 dBm

Data Source

RXLEVDL(3,3)

RXLEVDL40Range40

Received signal strength downlink in the range -70 dBm

Data Source

RXLEVDL(40,40)

RXLEVDL41Range41

Received signal strength downlink in the range -69 dBm

Data Source

RXLEVDL(41,41)

RXLEVDL42Range42

Received signal strength downlink in the range -68 dBm

Data Source

RXLEVDL(42,42)

RXLEVDL43Range43

Received signal strength downlink in the range -67 dBm

Data Source

RXLEVDL(43,43)

RXLEVDL44Range44

Received signal strength downlink in the range -66 dBm

Data Source

RXLEVDL(44,44)

RXLEVDL45Range45

Received signal strength downlink in the range -65 dBm

Data Source

RXLEVDL(45,45)

RXLEVDL46Range46

Received signal strength downlink in the range -64 dBm

Data Source

RXLEVDL(46,46)

RXLEVDL47Range47

Received signal strength downlink in the range -63 dBm

Data Source

RXLEVDL(47,47)

RXLEVDL48Range48

Received signal strength downlink in the range -62 dBm

Data Source

RXLEVDL(48,48)

RXLEVDL49Range49

Received signal strength downlink in the range -61 dBm

Data Source

RXLEVDL(49,49)

RXLEVDL4Range4

Received signal strength downlink in the range -106 dBm

Data Source

RXLEVDL(4,4)

RXLEVDL50Range50

Received signal strength downlink in the range -60 dBm

Data Source

RXLEVDL(50,50)

RXLEVDL51Range51

Received signal strength downlink in the range -59 dBm

Data Source

RXLEVDL(51,51)

RXLEVDL52Range52

Received signal strength downlink in the range -58 dBm

Data Source

RXLEVDL(52,52)

RXLEVDL53Range53

Received signal strength downlink in the range -57 dBm

Data Source

RXLEVDL(53,53)

RXLEVDL54Range54

Received signal strength downlink in the range -56 dBm

Data Source

RXLEVDL(54,54)

RXLEVDL55Range55

Received signal strength downlink in the range -55 dBm

Data Source

RXLEVDL(55,55)

RXLEVDL56Range56

Received signal strength downlink in the range -54 dBm

Data Source

RXLEVDL(56,56)

RXLEVDL57Range57

Received signal strength downlink in the range -53 dBm

Data Source

RXLEVDL(57,57)

RXLEVDL58Range58

Received signal strength downlink in the range -52 dBm

Data Source

RXLEVDL(58,58)

RXLEVDL59Range59

Received signal strength downlink in the range -51 dBm

Data Source

RXLEVDL(59,59)

RXLEVDL5Range5

Received signal strength downlink in the range -105 dBm

Data Source

RXLEVDL(5,5)

RXLEVDL60Range60

Received signal strength downlink in the range -50 dBm

Data Source

RXLEVDL(60,60)

RXLEVDL61Range61

Received signal strength downlink in the range -49 dBm

Data Source

RXLEVDL(61,61)

RXLEVDL62Range62

Received signal strength downlink in the range -48 dBm

Data Source

RXLEVDL(62,62)

RXLEVDL63Range63

Received signal strength downlink in the range -47 dBm

Data Source

RXLEVDL(63,63)

RXLEVDL6Range6

Received signal strength downlink in the range -104 dBm

Data Source

RXLEVDL(6,6)

RXLEVDL7Range7

Received signal strength downlink in the range -103 dBm

Data Source

RXLEVDL(7,7)

RXLEVDL8Range8

Received signal strength downlink in the range -102 dBm

Data Source

RXLEVDL(8,8)

RXLEVDL9Range9

Received signal strength downlink in the range -101 dBm

Data Source

RXLEVDL(9,9)

RXLEVUL0Range0

Received signal strength uplink in the range -110 dBm

Data Source

RXLEVUL(0,0)

RXLEVUL10Range10

Received signal strength uplink in the range -100 dBm

Data Source

RXLEVUL(10,10)

RXLEVUL11Range11

Received signal strength uplink in the range -99 dBm

Data Source

RXLEVUL(11,11)

RXLEVUL12Range12

Received signal strength uplink in the range -98 dBm

Data Source

RXLEVUL(12,12)

RXLEVUL13Range13

Received signal strength uplink in the range -97 dBm

Data Source

RXLEVUL(13,13)

RXLEVUL14Range14

Received signal strength uplink in the range -96 dBm

Data Source

RXLEVUL(14,14)

RXLEVUL15Range15

Received signal strength uplink in the range -95 dBm

Data Source

RXLEVUL(15,15)

RXLEVUL16Range16

Received signal strength uplink in the range -94 dBm

Data Source

RXLEVUL(16,16)

RXLEVUL17Range17

Received signal strength uplink in the range -93 dBm

Data Source

RXLEVUL(17,17)

RXLEVUL18Range18

Received signal strength uplink in the range -92 dBm

Data Source

RXLEVUL(18,18)

RXLEVUL19Range19

Received signal strength uplink in the range -91 dBm

Data Source

RXLEVUL(19,19)

RXLEVUL1Range1

Received signal strength uplink in the range -109 dBm

Data Source

RXLEVUL(1,1)

RXLEVUL20Range20

Received signal strength uplink in the range -90 dBm

Data Source

RXLEVUL(20,20)

RXLEVUL21Range21

Received signal strength uplink in the range -89 dBm

Data Source

RXLEVUL(21,21)

RXLEVUL22Range22

Received signal strength uplink in the range -88 dBm

Data Source

RXLEVUL(22,22)

RXLEVUL23Range23

Received signal strength uplink in the range -87 dBm

Data Source

RXLEVUL(23,23)

RXLEVUL24Range24

Received signal strength uplink in the range -86 dBm

Data Source

RXLEVUL(24,24)

RXLEVUL25Range25

Received signal strength uplink in the range -85 dBm

Data Source

RXLEVUL(25,25)

RXLEVUL26Range26

Received signal strength uplink in the range -84 dBm

Data Source

RXLEVUL(26,26)

RXLEVUL27Range27

Received signal strength uplink in the range -83 dBm

Data Source

RXLEVUL(27,27)

RXLEVUL28Range28

Received signal strength uplink in the range -82 dBm

Data Source

RXLEVUL(28,28)

RXLEVUL29Range29

Received signal strength uplink in the range -81 dBm

Data Source

RXLEVUL(29,29)

RXLEVUL2Range2

Received signal strength uplink in the range -108 dBm

Data Source

RXLEVUL(2,2)

RXLEVUL30Range30

Received signal strength uplink in the range -80 dBm

Data Source

RXLEVUL(30,30)

RXLEVUL31Range31

Received signal strength uplink in the range -79 dBm

Data Source

RXLEVUL(31,31)

RXLEVUL32Range32

Received signal strength uplink in the range -78 dBm

Data Source

RXLEVUL(32,32)

RXLEVUL33Range33

Received signal strength uplink in the range -77 dBm

Data Source

RXLEVUL(33,33)

RXLEVUL34Range34

Received signal strength uplink in the range -76 dBm

Data Source

RXLEVUL(34,34)

RXLEVUL35Range35

Received signal strength uplink in the range -75 dBm

Data Source

RXLEVUL(35,35)

RXLEVUL36Range36

Received signal strength uplink in the range -74 dBm

Data Source

RXLEVUL(36,36)

RXLEVUL37Range37

Received signal strength uplink in the range -73 dBm

Data Source

RXLEVUL(37,37)

RXLEVUL38Range38

Received signal strength uplink in the range -72 dBm

Data Source

RXLEVUL(38,38)

RXLEVUL39Range39

Received signal strength uplink in the range -71 dBm

Data Source

RXLEVUL(39,39)

RXLEVUL3Range3

Received signal strength uplink in the range -107 dBm

Data Source

RXLEVUL(3,3)

RXLEVUL40Range40

Received signal strength uplink in the range -70 dBm

Data Source

RXLEVUL(40,40)

RXLEVUL41Range41

Received signal strength uplink in the range -69 dBm

Data Source

RXLEVUL(41,41)

RXLEVUL42Range42

Received signal strength uplink in the range -68 dBm

Data Source

RXLEVUL(42,42)

RXLEVUL43Range43

Received signal strength uplink in the range -67 dBm

Data Source

RXLEVUL(43,43)

RXLEVUL44Range44

Received signal strength uplink in the range -66 dBm

Data Source

RXLEVUL(44,44)

RXLEVUL45Range45

Received signal strength uplink in the range -65 dBm

Data Source

RXLEVUL(45,45)

RXLEVUL46Range46

Received signal strength uplink in the range -64 dBm

Data Source

RXLEVUL(46,46)

RXLEVUL47Range47

Received signal strength uplink in the range -63 dBm

Data Source

RXLEVUL(47,47)

RXLEVUL48Range48

Received signal strength uplink in the range -62 dBm

Data Source

RXLEVUL(48,48)

RXLEVUL49Range49

Received signal strength uplink in the range -61 dBm

Data Source

RXLEVUL(49,49)

RXLEVUL4Range4

Received signal strength uplink in the range -106 dBm

Data Source

RXLEVUL(4,4)

RXLEVUL50Range50

Received signal strength uplink in the range -60 dBm

Data Source

RXLEVUL(50,50)

RXLEVUL51Range51

Received signal strength uplink in the range -59 dBm

Data Source

RXLEVUL(51,51)

RXLEVUL52Range52

Received signal strength uplink in the range -58 dBm

Data Source

RXLEVUL(52,52)

RXLEVUL53Range53

Received signal strength uplink in the range -57 dBm

Data Source

RXLEVUL(53,53)

RXLEVUL54Range54

Received signal strength uplink in the range -56 dBm

Data Source

RXLEVUL(54,54)

RXLEVUL55Range55

Received signal strength uplink in the range -55 dBm

Data Source

RXLEVUL(55,55)

RXLEVUL56Range56

Received signal strength uplink in the range -54 dBm

Data Source

RXLEVUL(56,56)

RXLEVUL57Range57

Received signal strength uplink in the range -53 dBm

Data Source

RXLEVUL(57,57)

RXLEVUL58Range58

Received signal strength uplink in the range -52 dBm

Data Source

RXLEVUL(58,58)

RXLEVUL59Range59

Received signal strength uplink in the range -51 dBm

Data Source

RXLEVUL(59,59)

RXLEVUL5Range5

Received signal strength uplink in the range -105 dBm

Data Source

RXLEVUL(5,5)

RXLEVUL60Range60

Received signal strength uplink in the range -50 dBm

Data Source

RXLEVUL(60,60)

RXLEVUL61Range61

Received signal strength uplink in the range -49 dBm

Data Source

RXLEVUL(61,61)

RXLEVUL62Range62

Received signal strength uplink in the range -48 dBm

Data Source

RXLEVUL(62,62)

RXLEVUL63Range63

Received signal strength uplink in the range -47 dBm

Data Source

RXLEVUL(63,63)

RXLEVUL6Range6

Received signal strength uplink in the range -104 dBm

Data Source

RXLEVUL(6,6)

RXLEVUL7Range7

Received signal strength uplink in the range -103 dBm

Data Source

RXLEVUL(7,7)

RXLEVUL8Range8

Received signal strength uplink in the range -102 dBm

Data Source

RXLEVUL(8,8)

RXLEVUL9Range9

Received signal strength uplink in the range -101 dBm

Data Source

RXLEVUL(9,9)

RXQUALDL0Range0

Received signal quality on downlink in the range 0 GSM Unit

Data Source

RXQUALDL(0,0)

RXQUALDL1Range1

Received signal quality on downlink in the range 1 GSM Unit

Data Source

RXQUALDL(1,1)

RXQUALDL2Range2

Received signal quality on downlink in the range 2 GSM Unit

Data Source

RXQUALDL(2,2)

RXQUALDL3Range3

Received signal quality on downlink in the range 3 GSM Unit

Data Source

RXQUALDL(3,3)

RXQUALDL4Range4

Received signal quality on downlink in the range 4 GSM Unit

Data Source

RXQUALDL(4,4)

RXQUALDL5Range5

Received signal quality on downlink in the range 5 GSM Unit

Data Source

RXQUALDL(5,5)

RXQUALDL6Range6

Received signal quality on downlink in the range 6 GSM Unit

Data Source

RXQUALDL(6,6)

RXQUALDL7Range7

Received signal quality on downlink in the range 7 GSM Unit

Data Source

RXQUALDL(7,7)

RXQUALUL0Range0

Received signal quality on uplink in the range 0 GSM Unit

Data Source

RXQUALUL(0,0)

RXQUALUL1Range1

Received signal quality on uplink in the range 1 GSM Unit

Data Source

RXQUALUL(1,1)

RXQUALUL2Range2

Received signal quality on uplink in the range 2 GSM Unit

Data Source

RXQUALUL(2,2)

RXQUALUL3Range3

Received signal quality on uplink in the range 3 GSM Unit

Data Source

RXQUALUL(3,3)

RXQUALUL4Range4

Received signal quality on uplink in the range 4 GSM Unit

Data Source

RXQUALUL(4,4)

RXQUALUL5Range5

Received signal quality on uplink in the range 5 GSM Unit

Data Source

RXQUALUL(5,5)

RXQUALUL6Range6

Received signal quality on uplink in the range 6 GSM Unit

Data Source

RXQUALUL(6,6)

RXQUALUL7Range7

Received signal quality on uplink in the range 7 GSM Unit

Data Source

RXQUALUL(7,7)

TAVAL0Range0

Actual timing advance in the range 0 GSM Unit

Data Source

TAVAL(0,0)

TAVAL104Range113

Actual timing advance in the range 104 to 113 GSM Unit

Data Source

TAVAL(104,113)

TAVAL10Range10

Actual timing advance in the range 10 GSM Unit

Data Source

TAVAL(10,10)

TAVAL114Range123

Actual timing advance in the range 114 to 123 GSM Unit

Data Source

TAVAL(114,123)

TAVAL11Range11

Actual timing advance in the range 11 GSM Unit

Data Source

TAVAL(11,11)

TAVAL124Range133

Actual timing advance in the range 124 to 133 GSM Unit

Data Source

TAVAL(124,133)

TAVAL12Range12

Actual timing advance in the range 12 GSM Unit

Data Source

TAVAL(12,12)

TAVAL134Range143

Actual timing advance in the range 134 to 143 GSM Unit

Data Source

TAVAL(134,143)

TAVAL13Range13

Actual timing advance in the range 13 GSM Unit

Data Source

TAVAL(13,13)

TAVAL144Range163

Actual timing advance in the range 144 to 163 GSM Unit

Data Source

TAVAL(144,163)

TAVAL14Range14

Actual timing advance in the range 14 GSM Unit

Data Source

TAVAL(14,14)

TAVAL15Range15

Actual timing advance in the range 15 GSM Unit

Data Source

TAVAL(15,15)

TAVAL164Range183

Actual timing advance in the range 164 to 183 GSM Unit

Data Source

TAVAL(164,183)

TAVAL16Range16

Actual timing advance in the range 16 GSM Unit

Data Source

TAVAL(16,16)

TAVAL17Range17

Actual timing advance in the range 17 GSM Unit

Data Source

TAVAL(17,17)

TAVAL184Range203

Actual timing advance in the range 184 to 203 GSM Unit

Data Source

TAVAL(184,203)

TAVAL18Range18

Actual timing advance in the range 18 GSM Unit

Data Source

TAVAL(18,18)

TAVAL19Range19

Actual timing advance in the range 19 GSM Unit

Data Source

TAVAL(19,19)

TAVAL1Range1

Actual timing advance in the range 1 GSM Unit

Data Source

TAVAL(1,1)

TAVAL204Range219

Actual timing advance in the range 204 to 219 GSM Unit

Data Source

TAVAL(204,219)

TAVAL20Range20

Actual timing advance in the range 20 GSM Unit

Data Source

TAVAL(20,20)

TAVAL21Range21

Actual timing advance in the range 21 GSM Unit

Data Source

TAVAL(21,21)

TAVAL22Range22

Actual timing advance in the range 22 GSM Unit

Data Source

TAVAL(22,22)

TAVAL23Range23

Actual timing advance in the range 23 GSM Unit

Data Source

TAVAL(23,23)

TAVAL24Range24

Actual timing advance in the range 24 GSM Unit

Data Source

TAVAL(24,24)

TAVAL25Range25

Actual timing advance in the range 25 GSM Unit

Data Source

TAVAL(25,25)

TAVAL26Range26

Actual timing advance in the range 26 GSM Unit

Data Source

TAVAL(26,26)

TAVAL27Range27

Actual timing advance in the range 27 GSM Unit

Data Source

TAVAL(27,27)

TAVAL28Range28

Actual timing advance in the range 28 GSM Unit

Data Source

TAVAL(28,28)

TAVAL29Range29

Actual timing advance in the range 29 GSM Unit

Data Source

TAVAL(29,29)

TAVAL2Range2

Actual timing advance in the range 2 GSM Unit

Data Source

TAVAL(2,2)

TAVAL30Range30

Actual timing advance in the range 30 GSM Unit

Data Source

TAVAL(30,30)

TAVAL31Range31

Actual timing advance in the range 31 GSM Unit

Data Source

TAVAL(31,31)

TAVAL32Range32

Actual timing advance in the range 32 GSM Unit

Data Source

TAVAL(32,32)

TAVAL33Range33

Actual timing advance in the range 33 GSM Unit

Data Source

TAVAL(33,33)

TAVAL34Range34

Actual timing advance in the range 34 GSM Unit

Data Source

TAVAL(34,34)

TAVAL35Range35

Actual timing advance in the range 35 GSM Unit

Data Source

TAVAL(35,35)

TAVAL36Range36

Actual timing advance in the range 36 GSM Unit

Data Source

TAVAL(36,36)

TAVAL37Range37

Actual timing advance in the range 37 GSM Unit

Data Source

TAVAL(37,37)

TAVAL38Range38

Actual timing advance in the range 38 GSM Unit

Data Source

TAVAL(38,38)

TAVAL39Range39

Actual timing advance in the range 39 GSM Unit

Data Source

TAVAL(39,39)

TAVAL3Range3

Actual timing advance in the range 3 GSM Unit

Data Source

TAVAL(3,3)

TAVAL40Range40

Actual timing advance in the range 40 GSM Unit

Data Source

TAVAL(40,40)

TAVAL41Range41

Actual timing advance in the range 41 GSM Unit

Data Source

TAVAL(41,41)

TAVAL42Range42

Actual timing advance in the range 42 GSM Unit

Data Source

TAVAL(42,42)

TAVAL43Range43

Actual timing advance in the range 43 GSM Unit

Data Source

TAVAL(43,43)

TAVAL44Range44

Actual timing advance in the range 44 GSM Unit

Data Source

TAVAL(44,44)

TAVAL45Range45

Actual timing advance in the range 45 GSM Unit

Data Source

TAVAL(45,45)

TAVAL46Range46

Actual timing advance in the range 46 GSM Unit

Data Source

TAVAL(46,46)

TAVAL47Range47

Actual timing advance in the range 47 GSM Unit

Data Source

TAVAL(47,47)

TAVAL48Range48

Actual timing advance in the range 48 GSM Unit

Data Source

TAVAL(48,48)

TAVAL49Range49

Actual timing advance in the range 49 GSM Unit

Data Source

TAVAL(49,49)

TAVAL4Range4

Actual timing advance in the range 4 GSM Unit

Data Source

TAVAL(4,4)

TAVAL50Range50

Actual timing advance in the range 50 GSM Unit

Data Source

TAVAL(50,50)

TAVAL51Range51

Actual timing advance in the range 51 GSM Unit

Data Source

TAVAL(51,51)

TAVAL52Range52

Actual timing advance in the range 52 GSM Unit

Data Source

TAVAL(52,52)

TAVAL53Range53

Actual timing advance in the range 53 GSM Unit

Data Source

TAVAL(53,53)

TAVAL54Range54

Actual timing advance in the range 54 GSM Unit

Data Source

TAVAL(54,54)

TAVAL55Range55

Actual timing advance in the range 55 GSM Unit

Data Source

TAVAL(55,55)

TAVAL56Range56

Actual timing advance in the range 56 GSM Unit

Data Source

TAVAL(56,56)

TAVAL57Range57

Actual timing advance in the range 57 GSM Unit

Data Source

TAVAL(57,57)

TAVAL58Range58

Actual timing advance in the range 58 GSM Unit

Data Source

TAVAL(58,58)

TAVAL59Range59

Actual timing advance in the range 59 GSM Unit

Data Source

TAVAL(59,59)

TAVAL5Range5

Actual timing advance in the range 5 GSM Unit

Data Source

TAVAL(5,5)

TAVAL60Range60

Actual timing advance in the range 60 GSM Unit

Data Source

TAVAL(60,60)

TAVAL61Range61

Actual timing advance in the range 61 GSM Unit

Data Source

TAVAL(61,61)

TAVAL62Range62

Actual timing advance in the range 62 GSM Unit

Data Source

TAVAL(62,62)

TAVAL63Range63

Actual timing advance in the range 63 GSM Unit

Data Source

TAVAL(63,63)

TAVAL64Range73

Actual timing advance in the range 64 GSM Unit

Data Source

TAVAL(64,73)

TAVAL6Range6

Actual timing advance in the range 6 GSM Unit

Data Source

TAVAL(6,6)

TAVAL74Range83

Actual timing advance in the range 74 GSM Unit

Data Source

TAVAL(74,83)

TAVAL7Range7

Actual timing advance in the range 7 GSM Unit

Data Source

TAVAL(7,7)

TAVAL84Range93

Actual timing advance in the range 84 GSM Unit

Data Source

TAVAL(84,93)

TAVAL8Range8

Actual timing advance in the range 8 GSM Unit

Data Source

TAVAL(8,8)

TAVAL94Range103

Actual timing advance in the range 94 to 103 GSM Unit

Data Source

TAVAL(94,103)

TAVAL9Range9

Actual timing advance in the range 9 GSM Unit

Data Source

TAVAL(9,9)

Subsystem_Number Primitive Calculations

The following is a list of primitive calculations for the Subsystem_Number entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Subsystem_Number Peg Counts

The following is a list of peg counts for the Subsystem_Number entity.

COMINCINT

Total incoming intermediate node connection oriented messages per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMINCINT

Source Section

SS7SCSUBSY

COMOUTINT

Total outgoing intermediate node connection oriented messages per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMOUTINT

Source Section

SS7SCSUBSY

COMSGORIG

Total connection oriented messages originating per destination SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMSGORIG

Source Section

SS7SCSUBSY

COMSGTERM

Total connection oriented messages terminating per local SSN.

Data Source

BSC_IQG20_APG40

Source Field

COMSGTERM

Source Section

SS7SCSUBSY

DT1ORIG

DT1 originating per local SSN

Data Source

BSC_IOG20_APG40

Source Field

DT1ORIG

Source Section

SS7SCSUBSY

DT1TERM

Data Form 1 (DT1) terminating per local SSN.

Data Source

BSC_IOG20_APG40

Source Field

DT1TERM

Source Section

SS7SCSUBSY

PERLEN

Period Length

Super_Channel Primitive Calculations

The following is a list of primitive calculations for the Super_Channel entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Super_Channel Peg Counts

The following is a list of peg counts for the Super_Channel entity.

AVDELDLSCBUF

Indicates the average delay of CS frames and PS frames in the super channel buffers downlink, in the PGW

Data Source

BSC_APG40

Source Field

AVDELDLSCBUF

Source Section

SUPERCH

AVDELULSCBUF

Indicates the average delay of CS frames and PS frames in the super channel buffers uplink, in the BTS

Data Source

BSC_APG40

Source Field

AVDELULSCBUF

Source Section

SUPERCH

DL7075SCLOAD

Counts the number of scans where the traffic load was between 70% and 75%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL7075SCLOAD

Source Section

SUPERCH2

DL7680SCLOAD

Counts the number of scans where the traffic load was between 76% and 80%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL7680SCLOAD

Source Section

SUPERCH2

DL8185SCLOAD

Counts the number of scans where the traffic load was between 81% and 85%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL8185SCLOAD

Source Section

SUPERCH2

DL8690SCLOAD

Counts the number of scans where the traffic load was between 86% and 90%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL8690SCLOAD

Source Section

SUPERCH2

DL9195SCLOAD

Counts the number of scans where the traffic load was between 91% and 95%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL9195SCLOAD

Source Section

SUPERCH2

DL9600SCLOAD

Counts the number of scans where the traffic load was between 96% and 100%, DL. Calculated in PGW

Data Source

BSC_APG40

Source Field

DL9600SCLOAD

Source Section

SUPERCH2

DLCSSCBUFTHR

Number of CS frames discarded in the SC buffer, DL

Data Source

BSC_APG40

Source Field

DLCSSCBUFTHR

Source Section

SUPERCH

DLPSSCBUFTHR

Number of PS frames discarded in the SC buffer, DL

Data Source

BSC_APG40

Source Field

DLPSSCBUFTHR

Source Section

SUPERCH

KBMAXREC

Maximum number of kbytes per second received by PGW in latest 15-minute interval

Data Source

BSC_APG40

Source Field

KBMAXREC

Source Section

SUPERCH

KBMAXSENT

Maximum number of kbytes per second sent by PGW in latest 15-minute interval

Data Source

BSC_APG40

Source Field

KBMAXSENT

Source Section

SUPERCH

KBREC

Accumulated number of kbytes received by the PGW

Data Source

BSC_APG40

Source Field

KBREC

Source Section

SUPERCH

KBSCAN

The time for which the counters KBSENT and KBREC have been accumulated

Data Source

BSC_APG40

Source Field

KBSCAN

Source Section

SUPERCH

KBSENT

Accumulated number of kbytes sent by the PGW

Data Source

BSC_APG40

Source Field

KBSENT

Source Section

SUPERCH

LOSTDLPACK

Accumulated number of lost CS and PS frames on the DL.

Data Source

BSC_APG40

Source Field

LOSTDLPACK

Source Section

SUPERCH

LOSTULPACK

Accumulated number of lost CS and PS frames on the UL.

Data Source

BSC_APG40

Source Field

LOSTULPACK

Source Section

SUPERCH

SC

Super Channel within Super Channel Group

Data Source

BSC_APG40

Source Field

SC

Source Section

SUPERCH

SCGR

Super Channel Group

Data Source

BSC_APG40

Source Field

SCGR

Source Section

SUPERCH

THRDLPACK

Accumulated number of CS and PS frames discarded on the DL by the PGW due to Abis overload.

Data Source

BSC_APG40

Source Field

THRDLPACK

Source Section

SUPERCH

THRULPACK

Accumulated estimation of number of CS and PS frames discarded on the UL by the BTS due to Abis overload.

Data Source

BSC_APG40

Source Field

THRULPACK

Source Section

SUPERCH

TOTDLPSSCFRBUF

Counts the total number of PS frames passing through the super channel buffers downlink, in the PGW

Data Source

BSC_APG40

Source Field

TOTDLPSSCFRBUF

Source Section

SUPERCH

TOTFRDLSCBUF

Total number of CS frames passing through SC buffer, DL

Data Source

BSC_APG40

Source Field

TOTFRDLSCBUF

Source Section

SUPERCH

TOTFRULSCBUF

Total number of CS frames passing through SC buffer, UL

Data Source

BSC_APG40

Source Field

TOTFRULSCBUF

Source Section

SUPERCH

TOTULPSSCFRBUF

Total number of PS frames passing through SC buffer, UL

Data Source

BSC_APG40

Source Field

TOTULPSSCFRBUF

Source Section

SUPERCH

UL7075SCLOAD

Counts the number of scans where the traffic load was between 70% and 75%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL7075SCLOAD

Source Section

SUPERCH2

UL7680SCLOAD

Counts the number of scans where the traffic load was between 76% and 80%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL7680SCLOAD

Source Section

SUPERCH2

UL8185SCLOAD

Counts the number of scans where the traffic load was between 81% and 85%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL8185SCLOAD

Source Section

SUPERCH2

UL8690SCLOAD

Counts the number of scans where the traffic load was between 86% and 90%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL8690SCLOAD

Source Section

SUPERCH2

UL9195SCLOAD

Counts the number of scans where the traffic load was between 91% and 95%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL9195SCLOAD

Source Section

SUPERCH2

UL9600SCLOAD

Counts the number of scans where the traffic load was between 96% and 100%, UL. Calculated in PGW

Data Source

BSC_APG40

Source Field

UL9600SCLOAD

Source Section

SUPERCH2

ULPSSCBUFTHR

Counts the number of PS frames discarded in the super channel buffers uplink, in the BTS

Data Source

BSC_APG40

Source Field

ULPSSCBUFTHR

Source Section

SUPERCH

ULSCBUFTHR

Number of CS frames discarded in the SC buffer, UL

Data Source

BSC_APG40

Source Field

ULSCBUFTHR

Source Section

SUPERCH

SUPPSERVICE Primitive Calculations

The following is a list of primitive calculations for the SUPPSERVICE entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

SUPPSERVICE Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

SUPPSERVICE Peg Counts

The following is a list of peg counts for the SUPPSERVICE entity.

MSC_RELEASE

Release

NSSINTTOT

Number of interrogations to VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSINTTOT

Source Section

SUPPLSERV

NSSINVTOT

Number of invocations

Data Source

MSC_IOG20_APG40

Source Field

NSSINVTOT

Source Section

SUPPLSERV

NSSIT1TOT

Number of interrogations by subscribers from OP1

Data Source

MSC_IOG20_APG40

Source Field

NSSIT1TOT

Source Section

SUPPLSERV

NSSIT2TOT

Number of interrogations by subscribers from OP2

Data Source

MSC_IQG20_APG40

Source Field

NSSIT2TOT

Source Section

SUPPLSERV

NSSIV1TOT

Number of invocations by subscribers from OP1

Data Source

MSC_IQG20_APG40

Source Field

NSSIV1TOT

Source Section

SUPPLSERV

NSSIV2TOT

Number of invocations by subscribers from OP2

Data Source

MSC_IQG20_APG40

Source Field

NSSIV2TOT

Source Section

SUPPLSERV

NSSIVS1TOT

successful USSD requests made by subscribers from operator 1 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVS1TOT

Source Section

SUPPLSERV

NSSIVS2TOT

successful USSD requests made by subscribers from operator 2 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVS2TOT

Source Section

SUPPLSERV

NSSIVSTOT

successful USSD requests made by subscribers not belonging to operator 1 or operator 2 in the MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NSSIVSTOT

Source Section

SUPPLSERV

NSSRETTOT

retrievals of held call for subscribers not belonging to operator 1 and operator 2 in MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NSSRETTOT

Source Section

SUPPLSERV

NSSRT1TOT

Number of retrievals of held call for subscribers of operator 1 in MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NSSRT1TOT

Source Section

SUPPLSERV

NSSRT2TOT

Number of retrievals of held call for subscribers of operator 2 in MSC/VLR

Data Source

MSC_IQG20_APG40

Source Field

NSSRT2TOT

Source Section

SUPPLSERV

PERLEN

Period Length

Switch_Netw_Terminal Primitive Calculations

The following is a list of primitive calculations for the Switch_Netw_Terminal entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Switch_Netw_Terminal Peg Counts

The following is a list of peg counts for the Switch_Netw_Terminal entity.

BLOL

Number of blocked SRSs. Incremented when an SRS unit is manually or automatically blocked. Decremented when an SRS unit is manually or automatically deblocked. It should be noted that an SRS unit is considered blocked when both plane A and plane B are blocked and likewise the SRS unit is considered deblocked when either plane A or plane B is deblocked.

Data Source

BSC_IQG20_APG40

Source Field

BLOL

Source Section

SNT

NBLOCACC

Accumulated number of blocked devices

Data Source

BSC_IQG20_APG40

Source Field

NBLOCACC

Source Section

SNT

NDEV

Number of connected SRSs. Incremented every time an SRS unit is connected. Decremented when an SRS unit is disconnected.

Data Source

BSC_IQG20_APG40

Source Field

NDEV

Source Section

SNT

PERLEN

Period Length

Synchr_Digi_paths Primitive Calculations

The following is a list of primitive calculations for the Synchr_Digi_paths entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

System Primitive Calculations

The following is a list of primitive calculations for the System entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PercentActiveSubscribers

Percent Active Subscribers

Calculation

$$\frac{\text{sum}(\text{MSC.HLRSubs}[\text{subString}(\text{LocalKey}, 1, 6) = "420608"], \text{NHLRREGAST})}{\text{sum}(\text{HLR}, \text{NSUBSCNT})} * 100.0$$

PercentRegisteredSubscribers

Percent Registered Subscribers

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) = "420608"], NHLRMSST ) * 100.0 /  
sum(HLR, NSUBSCNT)
```

pTotalGGSNPacketSuccessRate

Total GGSN Packet Success Rate is the Total Average Success Factor of the overall Packets sent to and Received from ALL GGSNs

Calculation

```
aggr( GSNTType.GSN, pGGSNPacketSuccessRate )
```

pTotalSessionManSuccessRateGGSN

Total Session Management Success Rate

Calculation

```
aggr( GSNTType.GSN, pSessionManSuccessRateGGSN )
```

RegisteredInroamers

Registered Inroamers

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) != "420608"], NHLRMSST)
```

RegisteredOutroamer

Registered Outroamers

Calculation

```
sum(HLR.PLMN[subString(LocalKey, 1, 6) != "420608"], vsum( GPPERPLMNCNT,  
PERPLMNCNT ))
```

SubscribersHLR

Subscribers in HLR

Calculation

```
AGGR(HLR, NSUBSCNT)
```

SubscribersVLR

Subscribers in VLR

Calculation

```
sum(MSC.HLRSubs[subString(LocalKey, 1, 6) = "420608"], NHLRMSST)
```

TotalCellTCHTraffic

Average TCH/F Traffic Level

Calculation

```
protect(sum(MSC.BSC.BTSSite.Cell, TCF_TRAFF_VOL))
```

TotalSwitchedTraffic

Generates a predefined graph showing total switch traffic in the network and total air traffic

Calculation

```
sum(MSC, TotalSwitchedTraffic)
```

TCAP_Obj Primitive Calculations

The following is a list of primitive calculations for the TCAP_Obj entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

```
""
```

INTERVALS

Number of 60 minute intervals covered

Calculation

```
PERLEN / (1.0 * 60)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT()
```

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

TCAP_Obj Peg Counts

The following is a list of peg counts for the TCAP_Obj entity.

DETECT

Numbers of situations when reject is detected by TC

Data Source

MSC_IQG20_APG40

Source Field

DETECT

Source Section

TCREJ

MSC_RELEASE

Release

PERLEN

Period Length

RECEIVED_TCCMP

Number of components received

Data Source

MSC_IQG20_APG40

Source Field

RECEIVED

Source Section

TCCMP

RECEIVED_TCDIA

Number of dialogue portions received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCDIA

RECEIVED_TCMMSG

Number of messages received

Data Source

MSC_IOG20_APG40

Source Field

RECEIVED

Source Section

TCMSG

SENT_TCCMP

Number of components sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCCMP

SENT_TCDIA

Number of dialogue portions sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCDIA

SENT_TCMSG

Number of messages sent

Data Source

MSC_IOG20_APG40

Source Field

SENT

Source Section

TCMSG

URECEIVED

Number of rejects received by TC-user

Data Source

MSC_IOG20_APG40

Source Field

URECEIVED

Source Section

TCREJ

USENT

Number of rejects sent by TC-user

Data Source

MSC_IOG20_APG40

Source Field

USENT

Source Section

TCREJ

TCAP_SubSystem Primitive Calculations

The following is a list of primitive calculations for the TCAP_SubSystem entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TCAP_SubSystem Peg Counts

The following is a list of peg counts for the TCAP_SubSystem entity.

MSC_RELEASE

Release

NMSGDLVDSSN

Number of messages successfully delivered to specific application

Data Source

MSC_IOG20_APG40

Source Field

NMSGDLVDSSN

Source Section

TPLAT

NMSGORIGSSN

Number of messages originated from a specific application

Data Source

MSC_IOG20_APG40

Source Field

NMSGORIGSSN

Source Section

TPLAT

PERLEN

Period Length

Time_Slot Primitive Calculations

The following is a list of primitive calculations for the Time_Slot entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Time_Slot Peg Counts

The following is a list of peg counts for the Time_Slot entity.

BSS_RELEASE

Release

CONCNT

Connection set up attempt

Data Source

BSC_IQG20_APG40

Source Field

CONCNT

Source Section

MOTS

CONERRCNT

Time out or radio link failure

Data Source

BSC_IQG20_APG40

Source Field

CONERRCNT

Source Section

MOTS

ID1_MOTS

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTS

ID2_MOTS

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTS

PERLEN

Period Length

TrafficType Primitive Calculations

The following is a list of primitive calculations for the TrafficType entity.

AnsSwitchedCalls

Answered Switched Calls

Calculation

NANSW

FailedSwitchedCalls

Failed Switched Calls

Calculation

vsum(NUNSUC, NECONG)

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

INTERVALS_TRART

Number of 60 minute intervals covered (from TRART data)

Calculation

PERLEN_TRART / (1.0 * 60)

NANSW

B-ANSWERS

Calculation

nullValue(NANSW_TRAFFTYPE, NANSW_MTRAFFTYPE)

NCALLS

Number of attempted calls

Calculation

nullValue(NCALLS_TRAFFTYPE, NCALLS_MTRAFFTYPE)

NECONG

EXTERNAL CONG

Calculation

nullValue(NECONG_TRAFFTYPE, NECONG_MTRAFFTYPE)

NICONG

INTERNAL CONG

Calculation

nullValue(NICONG_TRAFFTYPE, NICONG_MTRAFFTYPE)

NSCAN

Number of accumulations

Calculation

nullValue(NSCAN_TRAFFTYPE, NSCAN_MTRAFFTYPE)

NTRALACC

TRAFFIC LEVEL

Calculation

nullValue(NTRALACC_TRAFFTYPE, NTRALACC_MTRAFFTYPE)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

NUNSUCC

CALL ATTEMPTS

Calculation

$\text{nullValue}(\text{NUNSUCC_TRAFFTYPE}, \text{NUNSUCC_MTRAFFTYPE})$

PercentageAnsweredSwitchedCalls

Percentage Answered Switched Calls

Calculation

$(100 * \text{NANSW}) / (1.0 * \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))$

PercentageFailedSwitchedCalls

Percentage Failed Switched Calls

Calculation

$(100 * \text{vsum}(\text{NUNSUCC}, \text{NECONG})) / (1.0 * \text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG}))$

SwitchedAttmpt

Switched Attempt

Calculation

NCALLS

SwitchedCalls

Switched Calls

Calculation

$\text{vsum}(\text{NCALLS}, -1.0 * \text{NICONG})$

SwitchedTraffic

Switched Traffic

Calculation

$\text{NTRALACC} / (1.0 * \text{NSCAN})$

TT_AnsBidRatio

Percentage Answers:Bid Ratio

Calculation

$\text{NANSW} * 100.0 / \text{NCALLS}$

TT_AnsSeizeRatio

Percentage Answers:Seize Ratio

Calculation

$\text{NANSW} * 100.0 / \text{TT_Seizures}$

TT_RejCalls

Number of Seizures

Calculation

$\text{vsum}(\text{NUNSUCC}, \text{NICONG}, \text{NECONG})$

TT_Seizures

Number of Seizures

Calculation

$\text{vsum}(\text{NCALLS}, -1 * \text{NUNSUCC}, -1 * \text{NICONG}, -1 * \text{NECONG})$

TT_Traffic

Traffic Level in Erlangs

Calculation

$\text{NTRALACC} / (1.0 * \text{NSCAN})$

VENDORTECH

Vendor Technology

Calculation

$\text{isNull}(\text{PERLEN}) ? \text{nullString}() : \text{"EricssonGSM"}$

TrafficType Peg Counts

The following is a list of peg counts for the TrafficType entity.

MSC_RELEASE

Release

NANSW_MTRAFTYPE

Number of answers, renewed answers are not counted

Data Source

MSC_IOG20_APG40

Source Field

NANSW

Source Section

MTRAFTYPE

NANSW_TRAFFTYPE

B-ANSWERS

Data Source

MSC_IOG20_APG40

Source Field

NANSW

Source Section

TRAFFTYPE

NAREPLACE

DUE A-REPLACEMENT

Data Source

MSC_IOG20_APG40

Source Field

NAREPLACE

Source Section

TRAFFTYPE

NBLOBY

Accumulated value of the number of blocked both-way devices

Data Source

MSC_TRART

Source Field

NBLOBY

Source Section

ASC_TRART

NBLOOY

Accumulated value of the number of blocked one-way devices

Data Source

MSC_TRART

Source Field

NBLOOY

Source Section

ASC_TRART

NBUSY

REJ, BUSY B-SUB

Data Source

MSC_IQG20_APG40

Source Field

NBUSY

Source Section

TRAFFTYPE

NCALLS_MTRAFFTYPE

Number of calls recognized by the register function

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

MTRAFFTYPE

NCALLS_TRAFFTYPE

CALLS ATTEMPTS

Data Source

MSC_IQG20_APG40

Source Field

NCALLS

Source Section

TRAFFTYPE

NCONSIG

DUE CONGESTION

Data Source

MSC_IQG20_APG40

Source Field

NCONSIG

Source Section

TRAFFTYPE

NDVB

Number of both-way devices

Data Source

MSC_TRART

Source Field

NDVB

Source Section

ASC_TRART

NDVO

Number of one-way devices

Data Source

MSC_TRART

Source Field

NDVO

Source Section

ASC_TRART

NECONG_MTRAFTYPE

calls rejected due to external congestion, I.E. congestion due to lack of outgoing trunks

Data Source

MSC_IQG20_APG40

Source Field

NECONG

Source Section

MTRAFTYPE

NECONG_TRAFFTYPE

EXTERNAL CONG

Data Source

MSC_IQG20_APG40

Source Field

NECONG

Source Section

TRAFFTYPE

NFAULTSIG

DUE FAULTY SIGNA

Data Source

MSC_IQG20_APG40

Source Field

NFAULTSIG

Source Section

TRAFFTYPE

NICONG_MTRAFFTYPE

calls rejected due to internal congestion,I.E. congestion in group switch,too many reselections of Outgoing route, or congestion at seizure of RE complex and block CLCOF

Data Source

MSC_IQG20_APG40

Source Field

NICONG

Source Section

MTRAFFTYPE

NICONG_TRAFFTYPE

INTERNAL CONG

Data Source

MSC_IQG20_APG40

Source Field

NICONG

Source Section

TRAFFTYPE

NINACC

INACCESS B-NO

Data Source

MSC_IQG20_APG40

Source Field

NINACC

Source Section

TRAFFTYPE

NISDNCALLS

CALLS

Data Source

MSC_IQG20_APG40

Source Field

NISDNCALLS

Source Section

TRAFFTYPE

NLKPDSIG

DUE PROC SEND SIG

Data Source

MSC_IQG20_APG40

Source Field

NLKPDSIG

Source Section

TRAFFTYPE

NNMBLOC

REJ, NM ACTION

Data Source

MSC_IOG20_APG40

Source Field

NNMBLOC

Source Section

TRAFFTYPE

NNONEX

NONEXIST B-SUB

Data Source

MSC_IOG20_APG40

Source Field

NNONEX

Source Section

TRAFFTYPE

NRELAFTD

REL AFT DIAL

Data Source

MSC_IOG20_APG40

Source Field

NRELAFTD

Source Section

TRAFFTYPE

NRELBEFD

REL BEF DIAL

Data Source

MSC_IOG20_APG40

Source Field

NRELBEFD

Source Section

TRAFFTYPE

NRELDURD

REL DUR DIAL

Data Source

MSC_IQG20_APG40

Source Field

NRELDURD

Source Section

TRAFFTYPE

NSCAN_MTRAFFTYPE

Number of accumulated Values in NTRALACC

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

MTRAFFTYPE

NSCAN_TRAFFTYPE

ACCUMULATIONS

Data Source

MSC_IQG20_APG40

Source Field

NSCAN

Source Section

TRAFFTYPE

NSUEOS

Number of successful end-of-selections

Data Source

MSC_IQG20_APG40

Source Field

NSUEOS

Source Section

MTRAFFTYPE

NTHCON

CONNECTED CALLS

Data Source

MSC_IQG20_APG40

Source Field

NTHCON

Source Section

TRAFFTYPE

NTIMEOUT

DUE TIME LIM OWFL

Data Source

MSC_IQG20_APG40

Source Field

NTIMEOUT

Source Section

TRAFFTYPE

NTOBEFD

T.O. BEF DIAL

Data Source

MSC_IQG20_APG40

Source Field

NTOBEFD

Source Section

TRAFFTYPE

NTODURD

T.O. DUR DIAL

Data Source

MSC_IQG20_APG40

Source Field

NTODURD

Source Section

TRAFFTYPE

NTRALACC_MTRAFFTYPE

Accumulates the value of TRAL per NSCAN interval

Data Source

MSC_IQG20_APG40

Source Field

NTRALACC

Source Section

MTRAFFTYPE

NTRALACC_TRAFFTYPE

TRAFFIC LEVEL

Data Source

MSC_IOG20_APG40

Source Field

NTRALACC

Source Section

TRAFFTYPE

NUNSUCC_MTRAFFTYPE

unsuccessful calls, I.E. congestion due to auxiliary device groups, common control groups and calls lost to technical faults within the exchange, or time-out

Data Source

MSC_IOG20_APG40

Source Field

NUNSUCC

Source Section

MTRAFFTYPE

NUNSUCC_TRAFFTYPE

CALL ATTEMPTS

Data Source

MSC_IOG20_APG40

Source Field

NUNSUCC

Source Section

TRAFFTYPE

PERLEN

Period Length

PERLEN_TRART

Period Length (of TRAR data)

TRAL_MTRAFTYPE

Traffic level, number of ongoing through-connected calls

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

MTRAFTYPE

TRAL_TRAFFTYPE

OCCUPIED DEVICES

Data Source

MSC_IQG20_APG40

Source Field

TRAL

Source Section

TRAFFTYPE

TraffOrigin Primitive Calculations

The following is a list of primitive calculations for the TraffOrigin entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

TraffOrigin Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transceiver_Group Primitive Calculations

The following is a list of primitive calculations for the Transceiver_Group entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transceiver_Group Peg Counts

The following is a list of peg counts for the Transceiver_Group entity.

AVG16K

Average number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute

Data Source

BSC_IQG20_APG40

Source Field

AVG16K

Source Section

NONRES64K

AVG64K

Average number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. Mean over time and Mean over space.

Data Source

BSC_IQG20_APG40

Source Field

AVG64K

Source Section

RES64K

BSS_Release

Release

BUNDG0AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 0 (RSL)

Data Source

BSC_APG40

Source Field

BUNDG0AVEDL

Source Section

ABISTG

BUNDG1AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 10 (Speech)

Data Source

BSC_APG40

Source Field

BUNDG1AVEDL

Source Section

ABISTG

BUNDG2AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI =11 (CS data)

Data Source

BSC_APG40

Source Field

BUNDG2AVEDL

Source Section

ABISTG

BUNDG3AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 12 (GPRS/EDGE)

Data Source

BSC_APG40

Source Field

BUNDG3AVEDL

Source Section

ABISTG

BUNDG4AVEDL

Average bundling delay for the LAPD Bundling Group in TG containing SAPI = 62 (OML)

Data Source

BSC_APG40

Source Field

BUNDG4AVEDL

Source Section

ABISTG

CSDISCOVL

The number of discarded CS frames DL at IP overload actions

Data Source

BSC_APG40

Source Field

CSDISCOVL

Source Section

ABISIP

DL0025JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 0% and 25% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL0025JITBUFDEL

Source Section

ABISTG

DL100JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was more than 100% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL100JITBUFDEL

Source Section

ABISTG

DL100STNLOAD

Number of scans where the traffic load on the PGW - STN link was above 100%, DL

Data Source

BSC_APG40

Source Field

DL100STNLOAD

Source Section

ABISIP

DL2650JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 26% and 50% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL2650JITBUFDEL

Source Section

ABISTG

DL5175JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 51% and 75% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL5175JITBUFDEL

Source Section

ABISTG

DL7075STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 70% and 75%, DL

Data Source

BSC_APG40

Source Field

DL7075STNLOAD

Source Section

ABISIP

DL7600JITBUFDEL

Counts the number of CS frames where the jitter buffer delay DL was between 76% and 100% of the jitter buffer size setting. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DL7600JITBUFDEL

Source Section

ABISTG

DL7680STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 76% and 80%, DL

Data Source

BSC_APG40

Source Field

DL7680STNLOAD

Source Section

ABISIP

DL8185STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 81% and 85%, DL

Data Source

BSC_APG40

Source Field

DL8185STNLOAD

Source Section

ABISIP

DL8690STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 86% and 90%, DL

Data Source

BSC_APG40

Source Field

DL8690STNLOAD

Source Section

ABISIP

DL9195STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 91% and 95%, DL

Data Source

BSC_APG40

Source Field

DL9195STNLOAD

Source Section

ABISIP

DL9600STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 96% and 100%,
DL

Data Source

BSC_APG40

Source Field

DL9600STNLOAD

Source Section

ABISIP

DLDROPJBUF

Counts the number of discarded CS frames in jitter buffer, DL. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DLDROPJBUF

Source Section

ABISTG

DLJITBUFAVDEL

Counts the average jitter buffer delay on the DL. Calculated in the BTS.

Data Source

BSC_APG40

Source Field

DLJITBUFAVDEL

Source Section

ABISTG

FRAG64K

Fragmentation level of the 64KRES pool, i.e. the number of fragmented (partly used) 64 kbps
Abis paths in the 64KRES pool

Data Source

BSC_IQG20_APG40

Source Field

FRAG64K

Source Section

RES64K

ID1

State

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

MOTG

ID2

Block number

Data Source

BSC_IQG20_APG40

Source Field

ID2

Source Section

MOTG

INTERCNT

Intermittent faults. Incremented when an intermittent fault is reported on one of the managed objects within the TG.

Data Source

BSC_IQG20_APG40

Source Field

INTERCNT

Source Section

MOTG

IPDLSENTPACK

Accumulated number of IP packets sent DL on the PGW - STN link

Data Source

BSC_APG40

Source Field

IPDLSENTPACK

Source Section

ABISIP

IPLOSTPACKUL

Accumulated number of IP packets either lost on the UL or received with a checksum error

Data Source

BSC_APG40

Source Field

IPLOSTPACKUL

Source Section

ABISIP

IPNUMSCAN

The time for which the counters IPSENTKBYTES and IPRECKBYTES have been accumulated

Data Source

BSC_APG40

Source Field

IPNUMSCAN

Source Section

ABISIP

IPOVLL1

Indicates the number of level 1 actions taken to solve overload on Abis

Data Source

BSC_APG40

Source Field

IPOVLL1

Source Section

ABISIP

IPOVLL2

Indicates the number of level 2 actions taken to solve overload on Abis

Data Source

BSC_APG40

Source Field

IPOVLL2

Source Section

ABISIP

IPRECKBYTES

Total amount of traffic received by the PGW

Data Source

BSC_APG40

Source Field

IPRECKBYTES

Source Section

ABISIP

IPSENTKBYTES

Total amount of traffic sent by the PGW

Data Source

BSC_APG40

Source Field

IPSENTKBYTES

Source Section

ABISIP

IPULRECPACK

Accumulated number of IP packets received UL on the PGW - STN link

Data Source

BSC_APG40

Source Field

IPULRECPACK

Source Section

ABISIP

MAX16K

Maximum number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute. Aggregation C display the maximum and pass through aggregation unchanged and means Max over time and Max over space.

Data Source

BSC_IQG20_APG40

Source Field

MAX16K

Source Section

NONRES64K

MAX64K

Maximum number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. Aggregation C display the maximum and pass through aggregation unchanged and means Max over time and Max over space.

Data Source

BSC_IQG20_APG40

Source Field

MAX64K

Source Section

RES64K

MIN16K

Minimum number of idle 16 kbps Abis paths in non-64KRES pool during last 15 minutes, calculated from samples taken every minute. It passes through aggregation unchanged and displays the minimum. Aggregation M means minimum over time and minimum over space.

Data Source

BSC_IQG20_APG40

Source Field

MIN16K

Source Section

NONRES64K

MIN64K

Minimum number of idle 64 kbps Abis paths in 64KRES pool during last 15 minutes, calculated from samples taken every minute. It passes through aggregation unchanged and displays the minimum. Aggregation M means minimum over time and minimum over space.

Data Source

BSC_IQG20_APG40

Source Field

MIN64K

Source Section

RES64K

PERLEN

Period Length

PSDISCOVL

The number of discarded PS frames DL at IP overload actions

Data Source

BSC_APG40

Source Field

PSDISCOVL

Source Section

ABISIP

TG_ID

Managed Object identity for Transceiver Group

TRASYNCCNT

TRA synchronisation faults. Incremented when a TRA synchronisation fault is reported by the BTS on one of the TS

Data Source

BSC_IQG20_APG40

Source Field

TRASYNCCNT

Source Section

MOTG

UL0025JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 0% and 25% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL0025JITBUFDEL

Source Section

ABISTG

UL100JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was more than 100% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL100JITBUFDEL

Source Section

ABISTG

UL100STNLOAD

Number of scans where the traffic load on the PGW - STN link was above 100%, UL

Data Source

BSC_APG40

Source Field

UL100STNLOAD

Source Section

ABISIP

UL2650JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 26% and 50% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL2650JITBUFDEL

Source Section

ABISTG

UL5175JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 51% and 75% of the jitter buffer size setting. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

UL5175JITBUFDEL

Source Section

ABISTG

UL7075STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 70% and 75%, UL

Data Source

BSC_APG40

Source Field

UL7075STNLOAD

Source Section

ABISIP

UL7600JITBUFDEL

Counts the number of CS frames where the jitter buffer delay UL was between 76% and 100% of the jitter buffer size setting. Calculated in the PGW

Data Source

BSC_APG40

Source Field

UL7600JITBUFDEL

Source Section

ABISTG

UL7680STNLOAD

Number of scans where the traffic load on the PGW - STN link was link was between 76% and 80%, UL.

Data Source

BSC_APG40

Source Field

UL7680STNLOAD

Source Section

ABISIP

UL8185STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 81% and 85%, UL

Data Source

BSC_APG40

Source Field

UL8185STNLOAD

Source Section

ABISIP

UL8690STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 86% and 90%, UL

Data Source

BSC_APG40

Source Field

UL8690STNLOAD

Source Section

ABISIP

UL9195STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 91% and 95%, UL

Data Source

BSC_APG40

Source Field

UL9195STNLOAD

Source Section

ABISIP

UL9600STNLOAD

Number of scans where the traffic load on the PGW - STN link was between 96% and 100%,
UL

Data Source

BSC_APG40

Source Field

UL9600STNLOAD

Source Section

ABISIP

ULDROPIBUF

Counts the number of discarded CS frames in jitter buffer, UL. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

ULDROPIBUF

Source Section

ABISTG

ULJITBUFAVDEL

Counts the average jitter buffer delay on the UL. Calculated in the PGW.

Data Source

BSC_APG40

Source Field

ULJITBUFAVDEL

Source Section

ABISTG

Transcoder_Subpool Primitive Calculations

The following is a list of primitive calculations for the Transcoder_Subpool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Transcoder_Subpool Peg Counts

The following is a list of peg counts for the Transcoder_Subpool entity.

PERLEN

Period Length

TPSUBACTR

Active Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBACTR

Source Section

TRASUBPOOL

TPSUBAVTR

Available Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBAVTR

Source Section

TRASUBPOOL

TPSUBIDLTR

Idle Transcoder Resources

Data Source

BSC_IQG20_APG40

Source Field

TPSUBIDLTR

Source Section

TRASUBPOOL

TRC Primitive Calculations

The following is a list of primitive calculations for the TRC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

TRC Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TRC Peg Counts

The following is a list of peg counts for the TRC entity.

ALLOCATERATP

Number of allocation attempts for Ater interface transmission devices.

Data Source

BSC_IQG20_APG40

Source Field

ALLOCATERATP

Source Section

ATERTRANS

ATERCONG

Number of failed allocation attempts due to Ater interface transmission congestion.

Data Source

BSC_IQG20_APG40

Source Field

ATERCONG

Source Section

ATERTRANS

AVATERTRCDEV

Information on the number of available Ater interface transmission devices per BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

AVATERTRCDEV

Source Section

ATERTRANS

BLATERTRCDEV

Information on the number of blocked Ater interface transmission devices per BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

BLATERTRCDEV

Source Section

ATERTRANS

BSS_RELEASE

Release

ID1_ATERTRANS

Transcoder Controller ID

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

ATERTRANS

PERLEN

Period Length

SALLOCATERATP

Total number of allocation attempts for Ater interface transmission subdevices.

Data Source

BSC_IQG20_APG40

Source Field

SALLOCATERATP

Source Section

ATERTRANS

SZATERTRCDEV

Information on the number of partly or wholly seized Ater interface transmission devices connected to a BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

SZATERTRCDEV

Source Section

ATERTRANS

SZSATERTRCDEV

Information on the number of seized Ater interface transmission subdevices connected to a BSC in a TRC.

Data Source

BSC_IQG20_APG40

Source Field

SZSATERTRCDEV

Source Section

ATERTRANS

TRCNSCAN

Number of accumulations (every 1/10th second).

Data Source

BSC_IQG20_APG40

Source Field

TRCNSCAN

Source Section

ATERTRANS

TRD Primitive Calculations

The following is a list of primitive calculations for the TRD entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

LocalName

TRD Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

TRD Peg Counts

The following is a list of peg counts for the TRD entity.

BSS_RELEASE

Release

ID1_TRAPEVENT

Transcoder Device

Data Source

BSC_IQG20_APG40

Source Field

ID1

Source Section

TRAPEVENT

PERLEN

Period Length

TPACC

Number of Accumulations.

Data Source

BSC_IQG20_APG40

Source Field

TPACC

Source Section

TRAPEVENT

TPACTTR

Active Transcoder Resources. Shows the number of active transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPACTTR

Source Section

TRAPEVENT

TPALLOC

Transcoder Resource Allocation Attempts.

Data Source

BSC_IQG20_APG40

Source Field

TPALLOC

Source Section

TRAPEVENT

TPAVTR

Available Transcoder Resources. Shows the number of idle and active transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPAVTR

Source Section

TRAPEVENT

TPCONG

Transcoder Resource Congestion.

Data Source

BSC_IQG20_APG40

Source Field

TPCONG

Source Section

TRAPEVENT

TPCTIME

Transcoder Resource Congestion Time.

Data Source

BSC_IQG20_APG40

Source Field

TPCTIME

Source Section

TRAPEVENT

TPIDLTR

Idle Transcoder Resources. Shows the number of idle transcoder resources in a transcoder pool.

Data Source

BSC_IQG20_APG40

Source Field

TPIDLTR

Source Section

TRAPEVENT

TPSYNCF

V.110 Synchronization Failure for pooled transcoder devices.

Data Source

BSC_IQG20_APG40

Source Field

TPSYNCF

Source Section

TRAPEVENT

TPTFOEST

Number of successful TFO establishment

Data Source

BSC_IQG20_APG40

Source Field

TPTFOEST

Source Section

TRAPEVENT

TPTFOESTATT

Number of TFO establishment attempts

Data Source

BSC_IQG20_APG40

Source Field

TPTFOESTATT

Source Section

TRAPEVENT

TrunkRoute Primitive Calculations

The following is a list of primitive calculations for the TrunkRoute entity.

AnswerSeizureRatio_Percentage

Answer Seizure Ratio Percentage

Calculation

```
nullValue(BANS, AGGR(MSC.MSCTrunkDest, BANSWCNT)) * 100.0 /  
nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO))
```

BanswersIncomingRoute

Number of B-answers in the incoming route

Calculation

```
NANSWERSI * 100.0 / NCALLSI
```

BanswersOutgoingRoute

Number of B-answers in the outgoing route

Calculation

$$\text{NANSWERSO} * 100.0 / \text{NCALLSO}$$

Circuits_Available

Available Circuits on TrunkRoute

Calculation

$$\text{vsum}(\text{NDEV_TRAR}, -1.0 * (\text{nullValue}(\text{BLKDDEVS}, (\text{NSCAN_TRUNKROUTE})) / 13.0))$$

Congestion%

Congested Call Attempts

Calculation

$$100 * (\text{UNSUC_BIDS} / \text{NBIDS_TRAR})$$

DIMENSION

Dimensioning Parameter

Calculation

$$\text{WM_FCAST_DIMENSION}(\text{instance_id}, \text{TimeAndElement.tstamp})$$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

GROWTH

The Growth in Erlangs per Week for Linear Regression

Calculation

$$\text{WM_FCAST_GROWTH}(\text{instance_id}) * 3600 * 24 * 7$$

INTERVALS

Number of 60 minute intervals covered

Calculation

$$\text{PERLEN} / (1.0 * 60)$$

INTERVALS_TRAR

Number of 60 minute intervals covered (from TRAR data)

Calculation

$\text{PERLEN_TRAR} / (1.0 * 60)$

NANSWERS_BW

Number of seizures that leads to a B-answer on the incoming and outgoing trunks

Calculation

$\text{vsum}(\text{NANSWERSI}, \text{NANSWERSO})$

NCALLS_BW

Number of detected seizures by the incoming and outgoing trunks

Calculation

$\text{vsum}(\text{NCALLSI}, \text{NCALLSO})$

NISUPATP_BW

Number of ATP received on incoming and outgoing routes

Calculation

$\text{vsum}(\text{NISUPATPI}, \text{NISUPATPO})$

NOVERFLOW_BW

Number of congested call attempts on incoming and outgoing trunks

Calculation

$\text{vsum}(\text{NOVERFLOWI}, \text{NOVERFLOWO})$

NRESTRICT_BW

Sum of Number of Incoming and Outgoing calls rejected due to the function restriction of accessible incoming and outgoing circuits

Calculation

$\text{vsum}(\text{NRESTRICTO}, \text{NRESTRICTI})$

NSEMIPERC_BW

Number of semipermanent connection (Both Way)

Calculation

$\text{vsum}(\text{NSEMIPERCI}, \text{NSEMIPERCO})$

NTRALACC_TRUNKROUTE_BW

Accumulated traffic level (Both Way)

Calculation

`vsum (NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)`

NumberOfBAnswers

Number of B-answers

Calculation

`nullValue (BANS, AGGR (MSC.MSCTrunkDest, BANSWCNT))`

NumberOfBids

Number of bids

Calculation

`nullValue (NBIDS_TRAR, vsum (NCALLSI, NCALLSO))`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

PercentageCongestion

Percentage Congestion

Calculation

`UNSUC_BIDS * 100.0 / NBIDS_TRAR`

PercentAnswerSeizeRatio

% Answer Seize Ratio

Calculation

`nullValue (BANS, AGGR (MSC.MSCTrunkDest, BANSWCNT)) * 100.0 /
nullValue (NBIDS_TRAR, vsum (NCALLSI, NCALLSO))`

PercentSuccessCalls

Successful Calls Percentage

Calculation

```
100 * vsum(nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO)), -1.0 *  
nullValue(UNSUC_BIDS, vsum(NOVERFLOWI, NOVERFLOWO))) /  
nullValue(NBIDS_TRAR, vsum(NCALLSI, NCALLSO))
```

Sample_Size

The number of Samples in the Regression

Calculation

```
WM_FCAST_SAMPLES(instance_id)
```

TR_Correlation

Correlation co-efficient

Calculation

```
WM_FCAST_CORRELATION(instance_id)
```

TR_Critical_Carried

TG Critical Traffic based on Carried Traffic

Calculation

```
capacityB( (int) Circuits_Available, TR_GOS )
```

TR_Critical_Offered

Route Critical Traffic based on Offered Traffic

Calculation

```
TR_Critical_Carried / ( 1.0 - TR_GOS )
```

TR_Current_Util%

Current Utilization%

Calculation

```
100 * (DIMENSION / TR_Critical_Offered)
```

TR_Est_GOS

Calculated Theoretical Grade of Service

Calculation

```
gos( (int) Circuits_Available, offTraffic( (int) Circuits_Available, 1.0 *  
TR_Traffic ))
```

TR_Est_Lost

Calculated Theoretical Lost Traffic

Calculation

```
vsum( TR_Traffic_Off, -1.0 * TR_Traffic )
```

TR_Exhaust_Date

Circuits Exhaustion Date based on Critical Traffic

Calculation

```
dateToString(stringToDate(TimeAndElement.tstamp, "%Y-%m-%d") +  
(int)(vsum(TR_Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24)), "%Y-%m-%d")
```

TR_Exhaust_Days

Number of Days until Circuits Exhausts, based on Critical Traffic

Calculation

```
vsum((int) vsum(TR_Critical_Carried, -1.0 * DIMENSION) /  
(WM_FCAST_GROWTH(instance_id) * 3600 * 24), -7)
```

TR_ExtraCirt_Req

Extra Circuits Required in Route at the End of Forecast Period

Calculation

```
vsum( TR_N3Days_FCAST, -1.0 * NDEV_TRAR )
```

TR_Final_Util%

The forecast utilization at the end of the forecast period.

Calculation

```
100 * ( TR_Forecast_Value3 / TR_Critical_Offerred )
```

TR_Forecast_Value1

Forecasted Value at N1 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(1))
```

TR_Forecast_Value2

Forecasted Value at N2 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(2))
```

TR_Forecast_Value3

Forecasted Value at N3 days ahead

Calculation

```
vsum(WM_FCAST_DIMENSION(instance_id, TimeAndElement.tstamp), GROWTH / 7 *  
WM_FCAST_DAYS(3))
```

TR_GOS

Dimensioned Grade of Service for TrunkRoute

Calculation

TR_N1Days_FCAST

Forecast Circuits in N1 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value1)
```

TR_N2Days_FCAST

Forecast Circuits in N2 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value2)
```

TR_N3Days_FCAST

Forecast Circuits in N3 days time

Calculation

```
circuits(TR_GOS, TR_Forecast_Value3)
```

TR_PABH3

Profile Average Busy Hour for 3 highest values

Calculation

`WM_FCAST_PABH(instance_id, TimeAndElement.timestamp, 3)`

TR_PABH5

Profile Average Busy Hour for 5 highest values

Calculation

`WM_FCAST_PABH(instance_id, TimeAndElement.timestamp, 5)`

TR_Req_Ch

No of Circuits Required to carry the traffic given by Dimensioning parameter

Calculation

`circuits(TR_GOS, DIMENSION)`

TR_Traffic

Carried Traffic in Erlangs (BOTHWAY)

Calculation

`nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /
(1.0 * nullValue(ACCTRAFCNTR, NSCAN_TRUNKROUTE))`

TR_Traffic_Off

Calculated Theoretical Offered Traffic

Calculation

`offTraffic((int) NDEV_TRAR, 1.0 * TR_Traffic)`

TR_Traffic_OneWay

Carried Traffic in Erlangs

Calculation

`nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /
(1.0 * nullValue(ACCTRAFCNTR, NSCAN_TRUNKROUTE))`

TR_Util_Offered

TCH %Utilization based on Offered Traffic

Calculation

`100 * (TR_Traffic_Off / (1.0 * TR_Critical_Offered))`

Traffic

Calculation

```
nullValue(SUMTRAFLVL, vsum(NTRALACCI_TRUNKROUTE, NTRALACCO_TRUNKROUTE)) /  
(1.0 * nullValue(MSC.ACCTRAFCNTR, NSCAN_TRUNKROUTE))
```

TrafficBW

Traffic on Route (Erlangs)

Calculation

```
(NTRALACCI_TRUNKROUTE + NTRALACCO_TRUNKROUTE) / (1.0 * NSCAN_TRUNKROUTE)
```

TrafficInc

Trunk traffic incoming route (E)

Calculation

```
NTRALACCI_TRUNKROUTE / (1.0 * NSCAN_TRUNKROUTE)
```

TrafficOut

Trunk traffic outgoing route (E)

Calculation

```
NTRALACCO_TRUNKROUTE / (1.0 * NSCAN_TRUNKROUTE)
```

TRAL_TRUNKROUTE_BW

Indicator of the number of seized individuals by incoming and outgoing routes.

Calculation

```
vsum(TRALI_TRUNKROUTE, TRALO_TRUNKROUTE)
```

TrunkCallAttempts

Total trunk call attempts

Calculation

```
vsum(NCALLSI, NCALLSO)
```

VENDORTECH

Vendor Technology

Calculation

```
isNull( PERLEN ) ? nullString() : "EricssonGSM"
```

TrunkRoute Peg Counts

The following is a list of peg counts for the TrunkRoute entity.

ACCTRAFCNTR

Number of accumulations of the traffic level counter

Data Source

MSC_TRAR

Source Field

ACCTRAFCNTR

Source Section

ASC_TRAR

BANS

Number of B-answers

Data Source

MSC_TRAR

Source Field

BANS

Source Section

ASC_TRAR

BBLOL

Number of Type B-Blocked Devices

Data Source

MSC_I0G20_APG40

Source Field

BBLOL

Source Section

TRUNKROUTE

BLKDDEVS

Sum of blocked devices

Data Source

MSC_TRAR

Source Field

BLKDDEVS

Source Section

ASC_TRAR

BLOL_TRUNKROUTE

blocked individuals in the route Individuals in state BLOC, LIBL or SEAL;
 $BLOL = MBLOL + ABLOL + OBLOL$

Data Source

MSC_IQG20_APG40

Source Field

BLOL

Source Section

TRUNKROUTE

ID1_TRUNKROUTE

Global route number (I)

Data Source

MSC_IQG20_APG40

Source Field

ID1

Source Section

TRUNKROUTE

ID2_TRUNKROUTE

Global route number (O)

Data Source

MSC_IQG20_APG40

Source Field

ID2

Source Section

TRUNKROUTE

LASTCONGCNT

Number of congestions on the last available route, outgoing route

Data Source

MSC_IQG20_APG40

Source Field

LASTCONGCNT

Source Section

TRUNKROUTE

MSC_RELEASE

Release

NANSWERSI

Number of seizures that leads to a B-answer on the incoming route

Data Source

MSC_IQG20_APG40

Source Field

NANSWERSI

Source Section

TRUNKROUTE

NANSWERSO

Number of seizures that leads to a B-answer on the outgoing route

Data Source

MSC_IQG20_APG40

Source Field

NANSWERSO

Source Section

TRUNKROUTE

NBBLOCACC

Accumulated number of type B-blocked devices

Data Source

MSC_IQG20_APG40

Source Field

NBBLOCACC

Source Section

TRUNKROUTE

NBIDS_TRAR

Number of bids

Data Source

MSC_TRAR

Source Field

NBIDS

Source Section

ASC_TRAR

NBLOCACC_TRUNKROUTE

Accumulated number of blocked devices

Data Source

MSC_IOG20_APG40

Source Field

NBLOCACC

Source Section

TRUNKROUTE

NC7DSEIZ

Number of simultaneous calls

Data Source

MSC_IOG20_APG40

Source Field

NC7DSEIZ

Source Section

TRUNKROUTE

NCALLSI

Number of detected seizures by the incoming route

Data Source

MSC_IOG20_APG40

Source Field

NCALLSI

Source Section

TRUNKROUTE

NCALLSO

Number of seizure attempts by the outgoing route

Data Source

MSC_IOG20_APG40

Source Field

NCALLSO

Source Section

TRUNKROUTE

NCONGBAS

Number of congestions due to no resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGBAS

Source Section

TRUNKROUT2

NCONGTRANS

Nr of congestions due to no transmission resources available in Bearer Access

Data Source

MSC_IQG20_APG40

Source Field

NCONGTRANS

Source Section

TRUNKROUT2

NDEV_TRAR

Number of devices

Data Source

MSC_TRAR

Source Field

NDEV

Source Section

ASC_TRAR

NDEV_TRUNKROUTE

Number of individuals in service on the route

Data Source

MSC_IQG20_APG40

Source Field

NDEV

Source Section

TRUNKROUTE

NDSEIZ

Number of simultaneous seizures of devices on bothway route

Data Source

MSC_IQG20_APG40

Source Field

NDSEIZ

Source Section

TRUNKROUTE

NISUPATPI

Number of ATP received (incoming route and affiliated outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NISUPATPI

Source Section

TRUNKROUTE

NISUPATPO

Number of ATP received (outgoing route and affiliated incoming route)

Data Source

MSC_IQG20_APQ40

Source Field

NISUPATPO

Source Section

TRUNKROUTE

NOSEIZ_TRUNKROUTE

Number of outgoing seizures

Data Source

MSC_IQG20_APQ40

Source Field

NOSEIZ

Source Section

TRUNKROUTE

NOVERFLOWI

Number of calls with congestion (incoming route)

Data Source

MSC_IQG20_APQ40

Source Field

NOVERFLOWI

Source Section

TRUNKROUTE

NOVERFLOWO

Number of congested call attempts

Data Source

MSC_IOG20_APG40

Source Field

NOVERFLOWO

Source Section

TRUNKROUTE

NRESTRICTI

Number of incoming calls rejected

Data Source

MSC_IOG20_APG40

Source Field

NRESTRICTI

Source Section

TRUNKROUTE

NRESTRICTO

outgoing calls rejected for the route due to the function Restriction of accessible outgoing circuits

Data Source

MSC_IOG20_APG40

Source Field

NRESTRICTO

Source Section

TRUNKROUTE

NSCAN_TRUNKROUTE

Number of accumulations (scannings)

Data Source

MSC_IOG20_APG40

Source Field

NSCAN

Source Section

TRUNKROUTE

NSEMIPERCI

Number of semipermanent connection (incoming)

Data Source

MSC_IOG20_APG40

Source Field

NSEMIPERCI

Source Section

TRUNKROUTE

NSEMIPERCO

Number of semipermanent connection (outgoing)

Data Source

MSC_IOG20_APG40

Source Field

NSEMIPERCO

Source Section

TRUNKROUTE

NTRALACCI_TRUNKROUTE

Accumulated traffic level (incoming route)

Data Source

MSC_IOG20_APG40

Source Field

NTRALACCI

Source Section

TRUNKROUTE

NTRALACCO_TRUNKROUTE

Accumulated traffic level (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

NTRALACCO

Source Section

TRUNKROUTE

PERLEN

Period Length

PERLEN_TRAR

Period Length (of TRAR data)

RESTRDEVcnt

Number of restricted devices (outgoing route)

Data Source

MSC_IQG20_APG40

Source Field

RESTRDEVcnt

Source Section

TRUNKROUTE

SUMTRAFLVL

Accumulated value of the number of seized devices

Data Source

MSC_TRAR

Source Field

SUMTRAFLVL

Source Section

ASC_TRAR

THROUGHRTTCNT

Number of through connections to an idle B-subscriber on a route basis, outgoing route

Data Source

MSC_IQG20_APG40

Source Field

THROUGHRTTCNT

Source Section

TRUNKROUTE

TRALI_TRUNKROUTE

Indicates at each moment the number of seized individuals by the incoming route.

Data Source

MSC_IQG20_APG40

Source Field

TRALI

Source Section

TRUNKROUTE

TRALO_TRUNKROUTE

Indicates at each moment the number of seized individuals by the outgoing route.

Data Source

MSC_IQG20_APG40

Source Field

TRALO

Source Section

TRUNKROUTE

TRK_TYPE

Trunk Type

Data Source

MSC_IQG20_APG40

Source Field

TRK

UNSUC_BIDS

Number of unsuccessful bids

Data Source

MSC_TRAR

Source Field

UNSUC

Source Section

ASC_TRAR

VLR Primitive Calculations

The following is a list of primitive calculations for the VLR entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

INTERVALS

Number of 60 minute intervals covered

Calculation

PERLEN / (1.0 * 60)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

VENDORTECH

Vendor Technology

Calculation

isNull(PERLEN) ? nullString() : "EricssonGSM"

VLR Peg Counts

The following is a list of peg counts for the VLR entity.

MSC_RELEASE

Release

NACTIVSS

Number of Activate SS messages per subscriber during busy hour

Data Source

MSC_I0G20_APG40

Source Field

NACTIVSS

Source Section

VLR

NACTTRAC

Number of operations 'Activate Trace Mode' sent to the VLR

Data Source

MSC_IOG20_APG40

Source Field

NACTTRAC

Source Section

VLR

NBEGACT

Counter for number of "Begin Subscriber Activity" per VLR received

Data Source

MSC_IOG20_APG40

Source Field

NBEGACT

Source Section

VLR

NCANCEL

requests of a MAP operation "Cancel Location" sent to MSC/VLR counted per VLR. Stepped up when a request to perform the operation is sent to MSC/VLR

Data Source

MSC_IOG20_APG40

Source Field

NCANCEL

Source Section

VLR

NDEACTRA

Number of operations 'Deactivate Trace Mode' sent to the VLR

Data Source

MSC_IQG20_APG40

Source Field

NDEACTRA

Source Section

VLR

NDEACTSS

Number of Deactivate SS from VLR messages per subscriber during the busy hour

Data Source

MSC_IQG20_APG40

Source Field

NDEACTSS

Source Section

VLR

NDELETE

Number of Delete Subscriber Data operations sent per VLR

Data Source

MSC_IQG20_APG40

Source Field

NDELETE

Source Section

VLR

NERASESS

Number of Erasure requests received per VLR

Data Source

MSC_IOG20_APG40

Source Field

NERASESS

Source Section

VLR

NINSERT

Number of Insert Subscriber Data operations sent per VLR

Data Source

MSC_IOG20_APG40

Source Field

NINSERT

Source Section

VLR

NINTRRSS

Number of interrogation of SS per VLR

Data Source

MSC_IOG20_APG40

Source Field

NINTRRSS

Source Section

VLR

NPROROA

requests of a MAP operation "ProvideRoamingNumber" per VLR Stepped up when the operation is invoked

Data Source

MSC_IQG20_APG40

Source Field

NPROROA

Source Section

VLR

NPRSINFO

Number of requests of the MAP operation "Provide Subscriber Info" per VLR

Data Source

MSC_IQG20_APG40

Source Field

NPRSINFO

Source Section

VLR

NPURGEMS

Total number of Purge MS messages received from certain VLR

Data Source

MSC_IQG20_APG40

Source Field

NPURGEMS

Source Section

VLR

NPUSSDAR

Number of PROC UNSTR SS-DATA OPER REC

Data Source

MSC_IQG20_APG40

Source Field

NPUSSDAR

Source Section

VLR

NPUSSRQR

Number of PROC UNSTR SS-REQ OPER REC

Data Source

MSC_IQG20_APG40

Source Field

NPUSSRQR

Source Section

VLR

NREGPASS

Number of Register Password messages from VLR per subscriber during busy hour

Data Source

MSC_IQG20_APG40

Source Field

NREGPASS

Source Section

VLR

NREGTRSS

Number of Registration requests received per VLR

Data Source

MSC_IQG20_APG40

Source Field

NREGTRSS

Source Section

VLR

NUPDLOC

Requests of Location Updating operations sent to MSC/VLR counted per VLR

Data Source

MSC_IQG20_APG40

Source Field

NUPDLOC

Source Section

VLR

NUSSDNTS

Number of NOF UNSTR SS-NOTIFY OPER SENT

Data Source

MSC_IQG20_APG40

Source Field

NUSSDNTS

Source Section

VLR

NUSSDRQS

Number of UNSTR SS-REQ OPER SENT

Data Source

MSC_IQG20_APG40

Source Field

NUSSDRQS

Source Section

VLR

NVLRSAVTOT

Number of received authentication vectors from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSAVTOT

Source Section

COPRVLRST

NVLRSCSDTOT

Number of received current security context data from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSCSDTOT

Source Section

COPRVLRST

NVLRSECDSUCC

Number of successful requests for security data from VLR

Data Source

MSC_IOG20_APG40

Source Field

NVLRSECDSUCC

Source Section

COPRVLRST

NVLRSECDTOT

Number of total requests for security data from VLR

Data Source

MSC_I0G20_APG40

Source Field

NVLRSECDTOT

Source Section

COPRVLRST

PERLEN


Period Length

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

5 GSN Traffic Entities

The following figures show the Prospect reporting hierarchy for traffic entities.

Figure 3: Reporting Hierarchy

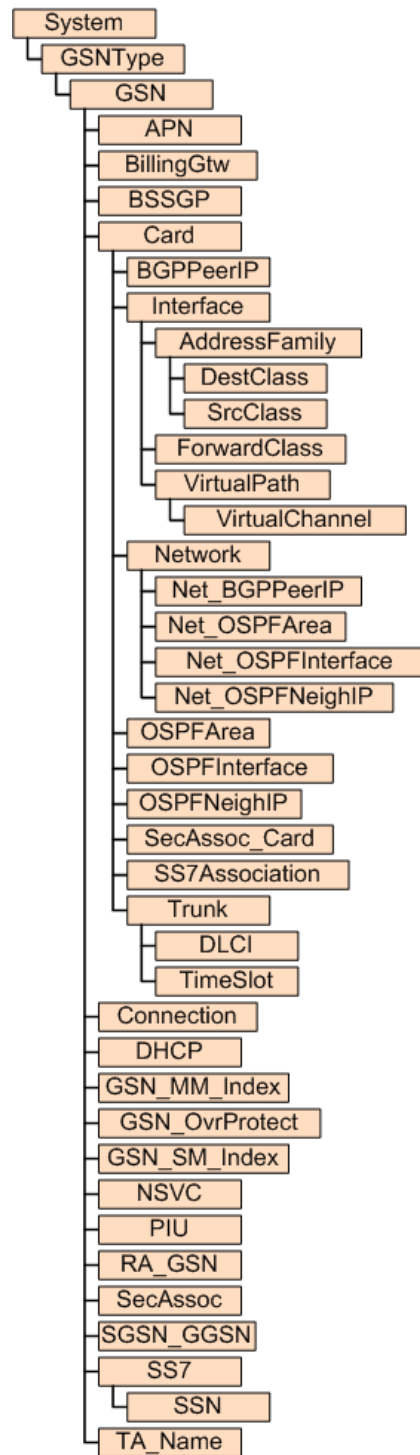

6 GSN Traffic Fields

The following is a list of available Traffic performance data fields.

AddressFamily Primitive Calculations

The following is a list of primitive calculations for the AddressFamily entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

AddressFamily Peg Counts

The following is a list of peg counts for the AddressFamily entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

AddressFamily General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

AddressFamily General

jnxRpfStatsBytes

The number of bytes received on this interface, belonging to this address family, that have been rejected due to RPF processing.

Data Source

GGSN

Source Field

jnxRpfStatsBytes

Source Section

jnxRpfStatsEntry

jnxRpfStatsPackets

The number of packets received on this interface, belonging to this address family, that have been rejected due to RPF processing.

Data Source

GGSN

Source Field

jnxRpfStatsPackets

Source Section

jnxRpfStatsEntry

APN Primitive Calculations

The following is a list of primitive calculations for the APN entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

pAPNpacketSuccessRate

APN Packet Success Rate is the Success Factor of the overall Packets sent to and Received from an Speciefic APN. Each success factor is weighted by percentage of total packets in either uplink or downlink direction

Calculation

```
( (1- vsum(ggsnApnUplinkDrops * ggsnApnUplinkPackets, ggsnApnDownlink-  
Drops * ggsnApnDownlinkPackets) ) * 100.0 ) / ( 1.0 * vsum( ggsnApnUplink-  
Packets, ggsnApnDownlinkPackets ) )
```

pAPNSuccessRate

APN Success Rate shows the success factor of the Overall Operations of specific APN . Each PDP Operation success is weighted by the number of the operation

Calculation

```
( ( 1 - vsum( ggsn_Att_pdp_act, ggsn_att_da_pdp_act, ggsn_att_ms_act,  
ggsn_att_init_deact, ggsn_att_ms_deact, -1 * ggsn_cmp_pdp_act, -1 *  
ggsn_cmp_da_pdp_act, -1 * ggsn_cmp_ms_act, -1 * ggsn_cmp_init_deact, -1 *  
ggsn_cmp_ms_deact ) ) * 100.0 ) / ( 1.0 * vsum( ggsn_Att_pdp_act,  
ggsn_att_da_pdp_act, ggsn_att_ms_act, ggsn_att_init_deact,  
ggsn_att_ms_deact ) )
```

pGTPaverPacktSizeDownlinkAPN

Average packet size is the ratio between bytes send and number of packets in Downlink per APN

Calculation

```
(ggsnApnUplinkBytes * 1.0) / ( 1.0 * ggsnApnUplinkPackets)
```

pGTPaverPacktSizeUplinkAPN

Average packet size is the ratio between bytes send and number of packets in Uplinklink per APN

Calculation

```
(ggsnApnDownlinkBytes * 1.0) / ( 1.0 * ggsnApnDownlinkPackets)
```

ppacketDropRateDownpAPN

The Ratio between the number of uplink Dropped Packets and Downlink packets processed on a per APN in percent

Calculation

```
(ggsnApnDownlinkDrops * 100.0) / (1.0 * ggsnApnDownlinkPackets)
```

ppacketDropRateUplinkAPN

The Ratio between the number of uplink Dropped Packets and uplink packets processed on a per APN in percent

Calculation

$$(\text{ggsnApnUplinkDrops} * 100.0) / (1.0 * \text{ggsnApnUplinkPackets})$$

pPDPActFailpAPN

PDP Activation Failure Rate is the ratio between the number of Attempt PDP context activation minus PDP context Activation completed divided by Attempt PDP context Activation Received at the APN in percent

Calculation

$$(\text{vsum}(\text{ggsn_Att_pdp_act}, -1 * \text{ggsn_cmp_pdp_act}) * 100.0) / (1.0 * \text{ggsn_Att_pdp_act})$$

pPDPActivMSFailpAPN

PDP Activation MS Failure Rate is the ratio between the number of PDP Attempted MS activations minus the number of PDP Completed MS activations divided by PDP Attempted MS activations in percent

Calculation

$$(\text{vsum}(\text{ggsn_att_ms_act}, -1 * \text{ggsn_cmp_ms_act}) * 100.0) / (1.0 * \text{ggsn_att_ms_act})$$

pPDPDeActivGGSNFailpAPN

PDP Deactivation Failure Rate is the ratio between the number of GGSN initiated deactivations minus the number of Completed GGSN deactivations divided by the number of GGSN initiated deactivations at the APN in percent

Calculation

$$(\text{vsum}(\text{ggsn_att_init_deact}, -1 * \text{ggsn_cmp_init_deact}) * 100.0) / (1.0 * \text{ggsn_att_init_deact})$$

pPDPDeActivMSFailpAPN

PDP deactivation failure rate MS is the ratio between the number of Attempted MS deactivations minus the number of Completed MS deactivations divided by the number of at the APN in percent

Calculation

$$(\text{vsum}(\text{ggsn_att_ms_deact}, -1 * \text{ggsn_cmp_ms_deact}) * 100.0) / (1.0 * \text{ggsn_att_ms_deact})$$

pPDPDynamicAddrFailpAPN

PDP activation with dynamic addresses failure Rate is the ratio between the number of Dynamic PDP activation attempt minus the number of PDP completed activation divided by the number of Dynamic PDP activation attempt in the APN in percent

Calculation

```
(vsum( ggsn_att_da_pdp_act, -1 * ggsn_cmp_da_pdp_act) * 100.0) / (1.0 * ggsn_att_da_pdp_act)
```

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

```
nullInt()
```

APN Peg Counts

The following is a list of peg counts for the APN entity.

attActPdpContDynPerApnOfGgsn

Number of dynamic PDP context activation procedures initiated by the MS where a dynamic PDP address is requested (attActPdpContextDynPerApnOfGgsn)

Data Source

GGSN

attActPdpContextPerApnOfGgsn

Number of PDP context activation procedures initiated by the MS

Data Source

GGSN

attDeactPdpContextByGgsnPerApn

Number of attempted PDP Context deactivation procedures initiated by the GGSN

Data Source

GGSN

attDeactPdpContPerApnOfGgsn

Number of PDP context deactivation procedures initiated by the MS on a per APN of the GGSN. (attDeactPdpContextPerApnOfGgsn)

Data Source

GGSN

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

APN General

collectionPeriod_SNMP

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

APN General

ggsn_apn_avg_actcontext

Average number of active PDP context on the APN during the last 15 minutes Collected using CLI.

Data Source

GGSN

Source Field

AveragePDPcontextsforperiod

Source Section

ggsnstatisticsapn

ggsn_apn_max_actcontext

Max number of activated PDP contexts on the APN Collected using CLI.

Data Source

GGSN

Source Field

MaximumPDPcontextsforperiod

Source Section

ggsnstatisticsapn

ggsn_att_da_pdp_act

Attempted dynamic-address PDP activations collected using CLI

Data Source

GGSN

Source Field

Attempteddynamical-addressPDPactivations

Source Section

ggsnstatisticsapn

ggsn_att_deact

Attempted deactivations collected using CLI

Data Source

GGSN

Source Field

Attempteddeactivations

Source Section

ggsnstatisticsapn

ggsn_att_init_deact

Attempted GGSN initiated deactivations collected using CLI

Data Source

GGSN

Source Field

AttemptedGGSNinitiateddeactivations

Source Section

ggsnstatisticsapn

ggsn_att_ms_act

Attempted MS activations collected using CLI

Data Source

GGSN

Source Field

AttemptedMSactivations

Source Section

ggsnstatisticsapn

ggsn_att_ms_deact

Attempted MS deactivations collected using CLI

Data Source

GGSN

Source Field

AttemptedMSdeactivations

Source Section

ggsnstatisticsapn

ggsn_Att_pdp_act

Attempted PDP activations Collected using CLI

Data Source

GGSN

Source Field

AttemptedPDPactivations

Source Section

ggsnstatisticsapn

ggsn_cmp_da_pdp_act

Completed dynamic-address PDP activations collected using CLI

Data Source

GGSN

Source Field

Completeddynamic-addressPDPactivations

Source Section

ggsnstatisticsapn

ggsn_cmp_init_deact

Completed GGSN initiated deactivations collected using CLI

Data Source

GGSN

Source Field

CompletedGGSNinitiateddeactivations

Source Section

ggsnstatisticsapn

ggsn_cmp_ms_act

Completed MS activations collected using CLI

Data Source

GGSN

Source Field

CompletedMSactivations

Source Section

ggsnstatisticsapn

ggsn_cmp_ms_deact

Completed MS deactivations collected using CLI

Data Source

GGSN

Source Field

CompletedMSdeactivations

Source Section

ggsnstatisticsapn

ggsn_cmp_pdp_act

Completed PDP activations collected using CLI

Data Source

GGSN

Source Field

CompletedPDPactivations

Source Section

ggsnstatisticsapn

ggsnapn_err_ind_rcvd

GTP request results Error indications received collected using CLI

Data Source

GGSN

Source Field

GTPrequestresultsErrorindicationsreceived

Source Section

ggsnstatisticsapn

ggsnapn_err_ind_trans

GTP request results Error indications Transmitted collected using CLI

Data Source

GGSN

Source Field

GTPrequestresultsTransmittedindicationsreceived

Source Section

ggsnstatisticsapn

ggsnApnActivePdpContextCount

Total number of active PDP contexts per APN Collected using CLI.

Data Source

GGSN

Source Field

ActivePDPcontexts

Source Section

ggsnstatisticsapn

ggsnApnActivePdpContextCount_jn

Total number of active PDP contexts per APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnActivePdpContextCount

Source Section

ggsnApn

ggsnApnActivePdpContextMax

Maximum number of activated PDP contexts on this APN. (Incremented when a PDP context is activated and the number of active PDP contexts = peak.) (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnActivePdpContextMax

Source Section

ggsnApn

ggsnApnActivePdpContextMean

Average number of active PDP contexts on the APN during the last 15 minutes. Updated every 15 minutes. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnActivePdpContextMean

Source Section

ggsnApn

ggsnApnActPdpContextCountIpv6

Number of active IPv6 PDP contexts associated with the APN.

Data Source

GGSN

ggsnApnAtmptActivationIpv6

The total number of attempted IPv6 PDP context activation procedures on a per APN

Data Source

GGSN

ggsnApnAttemptedActivation

Number of attempted PDP context activations for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttemptedActivation

Source Section

ggsnApn

ggsnApnAttemptedAuthActivation

The total number of attempted session establishment with user authentication required per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnAttemptedAuthActivation

ggsnApnAttemptedDeactivation

Number of attempted PDP context deactivations for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttemptedDeactivation

Source Section

ggsnApn

ggsnApnAttemptedDynActivation

Number of attempted PDP context activations where a dynamic MS IP address is requested for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttemptedDynActivation

Source Section

ggsnApn

ggsnApnAttemptedMSActivation

Number of PDP context activations initiated by the MS for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttemptedMSActivation

Source Section

ggsnApn

ggsnApnAttemptedMSDeactivation

Number of PDP context deactivations initiated by the MS for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttmptMSDeactivation

Source Section

ggsnApn

ggsnApnAttemptedSelfDeactivation

Number of PDP context deactivations initiated by this GGSN for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnAttmptSelfDeactivation

Source Section

ggsnApn

ggsnApnAttemptedUpdateMsAndSgsn

The total number of attempted PDP context update initiated by MS or SGSN per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnAttemptedUpdateMsAndSgsn

ggsnApnCmpltdActivationIpv6

The total number of completed IPv6 PDP context activations on a per APN

Data Source

GGSN

ggsnApnCompletedActivation

Number of completed PDP context activations for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCompletedActivation

Source Section

ggsnApn

ggsnApnCompletedDeactivation

Number of completed PDP context deactivations for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCompletedDeactivation

Source Section

ggsnApn

ggsnApnCompletedDynActivation

Number of completed PDP context activations where a dynamic MS IP address is requested for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCompletedDynActivation

Source Section

ggsnApn

ggsnApnCompletedMSActivation

Number of completed PDP context activations initiated by the MS for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCompletedMSActivation

Source Section

ggsnApn

ggsnApnCompletedMSDeactivation

Number of completed PDP context deactivations initiated by the MS for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCmpltdMSDeactivation

Source Section

ggsnApn

ggsnApnCompletedSelfDeactivation

Number of completed PDP context deactivations initiated by this GGSN for this APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnCmpltdSelfDeactivation

Source Section

ggsnApn

ggsnApnCompletedUpdateMsAndSgsn

The total number of successfully completed PDP context update initiated by MS or SGSN per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnCompletedUpdateMsAndSgsn

ggsnApnDownlinkBytes

Number of Downlink GTP-U bytes sent for the specific APN in the GGSN Collected using CLI

Data Source

GGSN

Source Field

DownlinktrafficBytes

Source Section

ggsnstatisticsapn

ggsnApnDownlinkBytes_jn

Number of Downlink GTP-U bytes sent for the specific APN in the GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnDownlinkBytes

Source Section

ggsnApn

ggsnApnDownlinkBytesIpv6

Total bytes for all processed IPv6 downlink packets on a per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnDownlinkBytesIpv6

ggsnApnDownlinkDrops

Number of Downlink GTP-U packets dropped for the specific APN Collected using CLI.

Data Source

GGSN

Source Field

DownlinktrafficDroppedpackets

Source Section

ggsnstatisticsapn

ggsnApnDownlinkDrops_jn

Number of Downlink GTP-U packets dropped for the specific APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnDownlinkDrops

Source Section

ggsnApn

ggsnApnDownlinkDropsIpv6

The number of dropped IPv6 packets in the downlink direction on a per APN of this GGSN

Data Source

GGSN

Source Field

ggsnApnDownlinkDropsIpv6

ggsnApnDownlinkPackets

Number of Downlink GTP-U packets sent for the specific APN in the GGSN Collected using CLI

Data Source

GGSN

Source Field

DownlinktrafficPackets

Source Section

ggsnstatisticsapn

ggsnApnDownlinkPackets_jn

Number of Downlink GTP-U packets sent for the specific APN in the GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnDownlinkPackets

Source Section

ggsnApn

ggsnApnDownlinkPacketsIpv6

Total downlink IPv6 packets processed on a per APN.

Data Source

GGSN

Source Field

ggsnApnDownlinkPacketsIpv6

ggsnApnFailedAuthActivation

The total number of failed session establishment due to user authentication failure, per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnFailedAuthActivation

ggsnApnGiSignalingInBytes

The total number of bytes for incoming signaling packets on the Gi interface per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnGiSignalingInBytes

ggsnApnGiSignalingInPackets

The number of incoming packets used for signaling purpose on the Gi interface per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnGiSignalingInPackets

ggsnApnGiSignalingOutBytes

The total number of bytes for outgoing signaling packets on the Gi interface per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnGiSignalingOutBytes

ggsnApnGiSignalingOutPackets

The number of outgoing packets used for signaling purpose on the Gi interface per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnGiSignalingOutPackets

ggsnApnIdleTimeOutDeactivation

The total number of PDP contexts deactivated per APN due to continuous idle time limit

Data Source

GGSN

Source Field

ggsnApnIdleTimeOutDeactivation

ggsnApnNbrOfTftFilters

The current number of TFT filters in use per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnNbrOfTftFilters

ggsnApnNghbrSolicitationRcv

The number of neighbor solicitation request received by GGSN, per APN

Data Source

GGSN

ggsnApnNghbrSolicitationRsp

The number of neighbor solicitation responses from GGSN, per APN

Data Source

GGSN

ggsnApnRouterSolicitationRcv

The number of router solicitation request received by GGSN, per APN

Data Source

GGSN

Source Field

ggsnApnRouterSolicitationRcv

ggsnApnRouterSolicitationRsp

The number of router solicitation responses from GGSN, per APN

Data Source

GGSN

Source Field

ggsnApnRouterSolicitationRsp

ggsnApnSessTimeoutDeactivation

The total number of PDP contexts deactivated per APN due to duration limit.

Data Source

GGSN

Source Field

ggsnApnSessTimeoutDeactivation

ggsnApnUplinkBytes

Number of Uplink GTP-U bytes sent for the specific APN in the GGSN Collected using CLI

Data Source

GGSN

Source Field

UplinktrafficBytes

Source Section

ggsnstatisticsapn

ggsnApnUplinkBytes_jn

Number of Uplink GTP-U bytes sent for the specific APN in the GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnUplinkBytes

Source Section

ggsnApn

ggsnApnUplinkBytesIpv6

Total bytes for all processed uplink IPv6 packets on a per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnUplinkBytesIpv6

ggsnApnUplinkDrops

Number of Uplink GTP-U packets dropped for the specific APN Collected using CLI.

Data Source

GGSN

Source Field

UplinktrafficDroppedpackets

Source Section

ggsnstatisticsapn

ggsnApnUplinkDrops_jn

Number of Uplink GTP-U packets dropped for the specific APN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnUplinkDrops

Source Section

ggsnApn

ggsnApnUplinkDropsIpv6

The number of dropped IPv6 packets in the uplink direction on a per APN of this GGSN.

Data Source

GGSN

Source Field

ggsnApnUplinkDropsIpv6

ggsnApnUplinkPackets

Number of Uplink GTP-U packets sent for the specific APN in the GGSN Collected using CLI

Data Source

GGSN

Source Field

UplinktrafficPackets

Source Section

ggsnstatisticsapn

ggsnApnUplinkPackets_jn

Number of Uplink GTP-U packets sent for the specific APN in the GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnApnUplinkPackets

Source Section

ggsnApn

ggsnApnUplinkPacketsIpv6

Total uplink IPv6 packets processed on a per APN

Data Source

GGSN

Source Field

ggsnApnUplinkPacketsIpv6

GGSNRelease

Release

Data Source

GGSN

Source Field

GGSNRelease

Source Section

APN General

GGSNRelease

Release

Data Source

GGSN

Source Field

GGSNRelease

Source Section

APN General

nbrOfActivePdpContPerApnAtGgsn

Number of active PDP context per APN (nbrOfActivePdpContextsPerApnAtGgsn)

Data Source

GGSN

succActPdpContDynPerApnOfGgsn

Number of successfully attempted dynamic PDP context activation procedures initiated by the MS where a dynamic PDP address is requested (succActPdpContextDynPerApnOfGgsn)

Data Source

GGSN

succActPdpContextPerApnOfGgsn

Number of successfully completed activation PDP context procedures initiated by the MS

Data Source

GGSN

succDeactPdpContByGgsnPerApn

Number of successful PDP Context deactivation procedures, initiated by the GGSN
(succDeactPdpContextByGgsnPerApn)

Data Source

GGSN

succDeactPdpContPerApnOfGgsn

Number of successfully completed PDP context deactivation procedures initiated by the MS
(succDeactPdpContextPerApnOfGgsn)

Data Source

GGSN

BGPPeerIP Primitive Calculations

The following is a list of primitive calculations for the BGPPeerIP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

BGPPeerIP Peg Counts

The following is a list of peg counts for the BGPPeerIP entity.

bgpPeerInTotalMessages_30

Total number of messages received from the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerInTotalMessages

Source Section

BGP Peer

bgpPeerInUpdates

Number of BGP UPDATE messages received on this connection.

Data Source

SGSN

Source Field

bgpPeerInUpdates

Source Section

BGP Peer

bgpPeerOutTotalMessages_30

Total number of messages transmitted to the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerOutTotalMessages

Source Section

BGP Peer

bgpPeerOutUpdates

Number of BGP UPDATE messages transmitted on this connection.

Data Source

SGSN

Source Field

bgpPeerOutUpdates

Source Section

BGP Peer

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

PeerFsmEstablishedTransitions

The total number of times the BGP FSM is transitioned into the established state

Data Source

SGSN

Source Field

bgpPeerFsmEstablishedTransitions

Source Section

BGP Peer

PeerInUpdateElapsedTime

Elapsed time since the last BGP UPDATE message was received from the peer.

Data Source

SGSN

Source Field

bgpPeerInUpdateElapsedTime

Source Section

BGP Peer

BillingGtw Primitive Calculations

The following is a list of primitive calculations for the BillingGtw entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt()

BillingGtw Peg Counts

The following is a list of peg counts for the BillingGtw entity.

collectionPeriod

Period Length

Data Source

GGSN

ggsnAcctDataRecTransReqCnclId

Number of Data Record Transfer Requests sent with indication to CDR packets related to previously unacknowledged sequence number (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctDataRecTransReqCancelled

Source Section

ggsnBillingGtw

ggsnAcctDataRecTransReqSent

Number of Data Record Transfer Requests packets sent by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctDataRecTransReqSent

Source Section

ggsnBillingGtw

ggsnAcctDataRecTransReqSentDup

Number of Data Record Transfer Requests sent with duplicated data record packets by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctDataRecTransReqSentDup

Source Section

ggsnBillingGtw

ggsnAcctDataRecTransRespRcvd

Number of Data Record Transfer Responses received by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctDataRecTransRespReceived

Source Section

ggsnBillingGtw

ggsnAcctPartialRecordGenerated

Number of partial Call Data Records generated (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctPartialRecordGenerated

Source Section

ggsnBillingGtw

ggsnAcctRedirectionReqRcvd

Number of Redirection Request packets received by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctRedirectionReqReceived

Source Section

ggsnBillingGtw

ggsnAcctRedirectionRespSent

Number of Redirection Response packet sent by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAcctRedirectionRespSent

Source Section

ggsnBillingGtw

Release_BillingGtw

Period Length

Data Source

GGSN

BSSGP Primitive Calculations

The following is a list of primitive calculations for the BSSGP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

BSSGP Peg Counts

The following is a list of peg counts for the BSSGP entity.

bssgpDownlinkOctets

The total number of downlink BSSGP octets per Network Service Entity (NSE).

Data Source

SGSN

Source Field

bssgpDownlinkOctets

Source Section

NSEI

bssgpDownlinkPackets

The total number of downlink BSSGP packets per NSE.

Data Source

SGSN

Source Field

bssgpDownlinkPackets

Source Section

NSEI

bssgpDownlinkPacketsSignalling

The number of downlink BSSGP signaling packets per NSE.

Data Source

SGSN

Source Field

bssgpDownlinkPacketsSignalling

Source Section

NSEI

bssgpStatusBvcUnknown

This measurement provides the number of BVC unknown BSSGP-STATUS messages sent to the Base Station Controller (BSC). These messages are sent to the BSC when traffic, that is, BSSGP-UL-UNITDATA messages, is received on the PTP-BVCs that do not exist in the Serving GPRS Support Node (SGSN). The traffic is then discarded. The PTP-BVCs is non-existent in the SGSN since no BVC-RESET messages, for the PTP-BVC, have been received from the BSC.

Data Source

SGSN

Source Field

bssgpStatusBvcUnknown

Source Section

NSEI

bssgpUplinkOctets

The total number of uplink BSSGP octets per NSE.

Data Source

SGSN

Source Field

bssgpUplinkOctets

Source Section

NSEI

bssgpUplinkPackets

The total number of uplink BSSGP packets per NSE.

Data Source

SGSN

Source Field

bssgpUplinkPackets

Source Section

NSEI

bssgpUplinkPacketsSignalling

The number of uplink BSSGP signaling packets per NSE.

Data Source

SGSN

Source Field

bssgpUplinkPacketsSignalling

Source Section

NSEI

collectionPeriod

GPRS General

Data Source

SGSN

Card Primitive Calculations

The following is a list of primitive calculations for the Card entity.

atmal5IfInPkts

The number of received AAL5 CPCS PDUs passed to a higher-layer. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Calculation

`atmal5IfInUcastPkts`

atmal5IfOutPkts

The number of AAL5 CPCS PDUs received from a higher layer for transmission. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Calculation

`atmal5IfOutUcastPkts`

AverageCapGTP_CPICthisGGSN

Average capacity of the GTP-C PIC on this GGSN

Calculation

`ggsnGtpcPdpCapacity`

CardGOS

Dimensioned Grade of Service

Calculation

DatagramFragFailRate_GSN

Datagram fragm rates show the percentage of datagrams that have been discarded

Calculation

`ipFragFails * 100.0 / ipFragOKs`

DatagramInAddressFailRate_GSN

Datagram IP address fail rate shows the percentage of input datagrams discarded

Calculation

`ipInAddrErrors * 100.0 / ipInReceives`

DatagramInHeaderFailRate_GSN

IP datagram headers errors Shows the percentage of inc datagrams that been disca

Calculation

`ipInHdrErrors * 100.0 / ipInReceives`

DatagramNoRoutesFailRate_GSN

Datagram no Route failure rate shows the percentage of datagrams discarded

Calculation

`ipOutNoRoutes * 100.0 / ipInReceives`

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IcmpInMsgsSucc

ICMP messages which the entity received success rate %

Calculation

`100 - (icmpInDestUnreaches + icmpInRedirects + icmpOutDestUnreach + OutErrors) * 100.0 / (icmpInMsgs + icmpInDestUnreaches + icmpInRedirects + icmpOutDestUnreach + OutErrors)`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

pDatagramFragFail

Datagram fragmentation rates show the percentage of datagrams that have been discarded because they needed to be fragmented compare to successful fragmentation.

Calculation

`ipFragFails * 100.0 / ipFragOKs`

pDatagramInAddrFailRate

Datagram IP address failure rate shows the percentage of input datagrams discarded because the IP address in their IP header's destination field was not a valid address.

Calculation

$$\text{ipInAddrErrors} * 100.0 / \text{ipInReceives}$$

pDatagramInHdrFail

IP datagram headers errors

Calculation

$$\text{ipInHdrErrors} * 100.0 / \text{ipInReceives}$$

pDatagramNoRoutesFail

Datagram no Route failure rate shows the percentage of datagrams discarded because no route could be found to transmit them to their destination.

Calculation

$$\text{ipOutNoRoutes} * 100.0 / \text{ipInReceives}$$

pToIDatagramsFail

Total IP datagram failures rate shows the percentage of incoming datagrams that have been discarded.

Calculation

$$\text{ipInReceives} * 100.0 / \text{vsum}(\text{ipInHdrErrors}, \text{ipInAddrErrors}, \text{ipOutNoRoutes}, \text{ipFragFails})$$

TotalCapGTP_CPICThisGGSN

Total capacity of the GTP-C PIC on this GGSN

Calculation

$$\text{ggsnGtpcPdpCapacity}$$

TotIpDatagramsFailRate_GSN

Tot IP datagr fail rate shows the percentage of inc datagr that have been disca

Calculation

$$\text{ipInReceives} * 100.0 / (\text{ipInHdrErrors} + \text{ipInAddrErrors} + \text{ipOutNoRoutes} + \text{ipFragFails})$$

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

Card Peg Counts

The following is a list of peg counts for the Card entity.

atmal5CRCErrors

The number of AAL5 CPCS PDUs received with CRC-32 errors. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5CRCErrors

Source Section

ATM

atmal5IfInDiscards

Number of received AAL5 CPCS PDUs discarded. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfInDiscards

Source Section

ATM

atmal5IfInErrors

Number of errored AAL5 CPCS PDUs received. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfInErrors

Source Section

ATM

atmal5IfInOctets

The number of received AAL5 CPCS PDU octets. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfInOctets

Source Section

ATM

atmal5IfInUcastPkts

The number of received AAL5 CPCS PDUs passed to a higher-layer.

Data Source

SGSN

Source Field

atmal5IfInUcastPkts

Source Section

ATM

atmal5IfOutDiscards

Number of AAL5 CPCS PDUs received for transmission that are discarded. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfOutDiscards

Source Section

ATM

atmal5IfOutErrors

Number of AAL5 CPCS PDUs that could not be transmitted due to errors. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfOutErrors

Source Section

ATM

atmal5IfOutOctets

The number of AAL5 CPCS PDU octets transmitted. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5IfOutOctets

Source Section

ATM

atmal5IfOutUcastPkts

The number of AAL5 CPCS PDUs received from a higher layer for transmission

Data Source

SGSN

Source Field

atmal5IfOutUcastPkts

Source Section

ATM

atmal5OverSizedSDUs

The number of AAL5 CPCS PDUs discarded on this AAL5 VCC at the interface associated with an AAL5 entity because the AAL5 SDUs were too large. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmal5OverSizedSDUs

Source Section

ATM

atmlCellDrops

Number of cell drops. R7: Not applicable for IBASv3b (Interface Board for ATM Single-mode version 3b).

Data Source

SGSN

Source Field

atmlCellDrops

Source Section

ATM

atmlCLPCells

Number of received cells with Cell Loss Priority (CLP) flag set. R7: Not applicable for IBASv3b (Interface Board for ATM Single-mode version 3b).

Data Source

SGSN

Source Field

atmlCLPCells

Source Section

ATM

atmlCongestionErrors

Number of received cells with PT field indicating congestion experienced. R7: Not applicable for IBASv3b (Interface Board for ATM Single-mode version 3b).

Data Source

SGSN

Source Field

atmlCongestionErrors

Source Section

ATM

atmlCPIErrors

Number of received cells with Common Part Indicator (CPI) field different from zero. R7: Not applicable for IBASv3b (Interface Board for ATM Single-mode version 3b).

Data Source

SGSN

Source Field

atmlCPIErrors

Source Section

ATM

atmlInvalidCells

Number of invalid cells. R7: Not applicable for IBASv3b (Interface Board for ATM Single-mode version 3b).

Data Source

SGSN

Source Field

atmlInvalidCells

Source Section

ATM

atmlVpiVciLookupErrors

Number of VPI VCI look-up errors. R7: For IBASv3b, the port ID is always zero and the value returned is the sum of all ports.

Data Source

SGSN

Source Field

atmlVpiVciLookupErrors

Source Section

ATM

atmplLineAIS

Number of Line Alarm Indication Signal (AIS) events.

Data Source

SGSN

Source Field

atmplLineAIS

Source Section

ATM

atmplLineOverheadBIPErrors

Number of line overhead Bit Interleaved Parity (BIP) errors.

Data Source

SGSN

Source Field

atmplLineOverheadBIPErrors

Source Section

ATM

atmplLineRDI

Number of Line Remote Defect Indication (RDI) events.

Data Source

SGSN

Source Field

atmplLineRDI

Source Section

ATM

atmplLineREI

Number of line Remote Error Indications(REI), former FEBE.

Data Source

SGSN

Source Field

atmplLineREI

Source Section

ATM

atmplLOF

Number of Loss Of Frames (LOF) events.

Data Source

SGSN

Source Field

atmplLOF

Source Section

ATM

atmplLOP

Number of Loss Of Pointer (LOP) events.

Data Source

SGSN

Source Field

atmplLOP

Source Section

ATM

atmplLOS

Number of Loss Of Signals (LOS) events.

Data Source

SGSN

Source Field

atmplLOS

Source Section

ATM

atmplOOF

Number of Out Of Frames (OOF) events.

Data Source

SGSN

Source Field

atmplOOF

Source Section

ATM

atmplPathAIS

Number of path Alarm Indication Signal (AIS) events.

Data Source

SGSN

Source Field

atmplPathAIS

Source Section

ATM

atmplPathOverheadBIPErrors

Number of path overhead Bit Interleaved Parity (BIP) errors.

Data Source

SGSN

Source Field

atmplPathOverheadBIPErrors

Source Section

ATM

atmplPathRDI

Number of path Remote Defect Indication (RDI) events.

Data Source

SGSN

Source Field

atmplPathRDI

Source Section

ATM

atmplPathREI

Number of path Remote Error Indications(REI), former FEBE.

Data Source

SGSN

Source Field

atmplPathREI

Source Section

ATM

atmplSectionOverheadBIPErrors

Number of section overhead Bit Interleaved Parity (BIP) errors.

Data Source

SGSN

Source Field

atmplSectionOverheadBIPErrors

Source Section

ATM

atmtclCorrectableHECs

Count of correctable HEC errors, if single-bit HEC error correction is enabled, otherwise not valid.

Data Source

SGSN

Source Field

atmtclCorrectableHECs

Source Section

ATM

atmtclEgressCells

Total number of user cells in egress direction.

Data Source

SGSN

Source Field

atmtclEgressCells

Source Section

ATM

atmtclIngressCells

Total number of error free user cells in ingress direction.

Data Source

SGSN

Source Field

atmtclIngressCells

Source Section

ATM

atmtclOCDEvents

The number of times the Out of Cell Delineation (OCD) events occurred.

Data Source

SGSN

Source Field

atmtclOCDEvents

Source Section

ATM

atmtclUncorrectableHECs

Count of uncorrectable HEC errors, if single-bit HEC error correction is enabled, otherwise it is a count of all errored cells

Data Source

SGSN

Source Field

atmtclUncorrectableHECs

Source Section

ATM

bgpPeerInTotalMessages_21

Total number of messages received from the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerInTotalMessages

Source Section

BGP Peer

bgpPeerOutTotalMessages_21

Total number of messages transmitted to the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerOutTotalMessages

Source Section

BGP Peer

collectionPeriod

GPRS General

Data Source

SGSN

collectionPeriod_SNMP_GGSN

Period Length

Data Source

GGSN

Source Field

collectionPeriod_SNMP_GGSN

Source Section

Card General

ethInErrors_Unit0

Number of incoming errors, unit 0.

Data Source

SGSN

Source Field

ethInErrors

Source Section

Ethernet

ethInErrors_Unit1

Number of incoming errors, unit 1.

Data Source

SGSN

Source Field

ethInErrors

Source Section

Ethernet

ethInErrorsBUF_Unit0

Number of incoming buffer errors, unit 0.

Data Source

SGSN

Source Field

ethInErrorsBUF

Source Section

Ethernet

ethInErrorsBUF_Unit1

Number of incoming buffer errors, unit 1.

Data Source

SGSN

Source Field

ethInErrorsBUF

Source Section

Ethernet

ethInErrorsCE_Unit0

Number of incoming CRC errors, unit 0.

Data Source

SGSN

Source Field

ethInErrorsCE

Source Section

Ethernet

ethInErrorsCE_Unit1

Number of incoming CRC errors, unit 1.

Data Source

SGSN

Source Field

ethInErrorsCE

Source Section

Ethernet

ethInErrorsCLBLK_Unit0

Number of incoming clblk errors, unit 0.

Data Source

SGSN

Source Field

ethInErrorsCLBLK

Source Section

Ethernet

ethInErrorsCLBLK_Unit1

Number of incoming clblk errors, unit 1.

Data Source

SGSN

Source Field

ethInErrorsCLBLK

Source Section

Ethernet

ethInErrorsCS_Unit0

Number of incoming collisions seen, unit 0.

Data Source

SGSN

Source Field

ethInErrorsCS

Source Section

Ethernet

ethInErrorsCS_Unit1

Number of incoming collisions seen, unit 1.

Data Source

SGSN

Source Field

ethInErrorsCS

Source Section

Ethernet

ethinErrorsFF_Unit0

Failed the address recognition filtering, unit 0.

Data Source

SGSN

Source Field

ethinErrorsFF

Source Section

Ethernet

ethinErrorsFF_Unit1

Failed the address recognition filtering, unit 1.

Data Source

SGSN

Source Field

ethInErrorsFF

Source Section

Ethernet

ethInErrorsMBLK_Unit0

Number of incoming mblock errors, unit 0.

Data Source

SGSN

Source Field

ethInErrorsMBLK

Source Section

Ethernet

ethInErrorsMBLK_Unit1

Number of incoming mblock errors, unit 1.

Data Source

SGSN

Source Field

ethInErrorsMBLK

Source Section

Ethernet

ethInErrorsRF_Unit0

Number of runt frames (frames damaged by collision), unit 0.

Data Source

SGSN

Source Field

ethInErrorsRF

Source Section

Ethernet

ethInErrorsRF_Unit1

Number of runt frames (frames damaged by collision), unit 1.

Data Source

SGSN

Source Field

ethInErrorsRF

Source Section

Ethernet

ethInErrorsTL_Unit0

Ethernet frame Too Long, unit 0.

Data Source

SGSN

Source Field

ethInErrorsTL

Source Section

Ethernet

ethInErrorsTL_Unit1

Ethernet frame Too Long, unit 1.

Data Source

SGSN

Source Field

ethInErrorsTL

Source Section

Ethernet

ethInMF_Unit0

Retired fr 5.0.10.0.0-Ethernet Multicast frames received, unit 0.

Data Source

SGSN

Source Field

ethInMF

Source Section

Ethernet

ethInMF_Unit1

Retired fr 5.0.10.0.0-Ethernet Multicast frames received, unit 1.

Data Source

SGSN

Source Field

ethInMF

Source Section

Ethernet

ethInPkts_Unit0

Retired fr 5.0.10.0.0-Total number of packets, delivered by this sub-layer to a higher (sub-)layer.

Data Source

SGSN

Source Field

ethInPkts

Source Section

Ethernet

ethInPkts_Unit1

Retired fr 5.0.10.0.0-Total number of packets, delivered by this sub-layer to a higher (sub-)layer.

Data Source

SGSN

Source Field

ethInPkts

Source Section

Ethernet

ethInUcastPkts_Unit0

Total number of packets, delivered by this sub-layer to a higher (sub-)layer.

Data Source

SGSN

Source Field

ethInUcastPkts

Source Section

Ethernet

ethInUcastPkts_Unit1

Total number of packets, delivered by this sub-layer to a higher (sub-)layer.

Data Source

SGSN

Source Field

ethInUcastPkts

Source Section

Ethernet

ethOutErrorOWN_Unit0

Number of outgoing own errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrorOWN

Source Section

Ethernet

ethOutErrorOWN_Unit1

Number of outgoing own errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrorOWN

Source Section

Ethernet

ethOutErrors_Unit0

Number of outbound errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrors

Source Section

Ethernet

ethOutErrors_Unit1

Number of outbound errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrors

Source Section

Ethernet

ethOutErrorsBUF_Unit0

Number of outgoing buffer errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsBUF

Source Section

Ethernet

ethOutErrorsBUF_Unit1

Number of outgoing buffer errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsBUF

Source Section

Ethernet

ethOutErrorsEC_Unit0

Number of outgoing excessive collisions, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsEC

Source Section

Ethernet

ethOutErrorsEC_Unit1

Number of outgoing excessive collisions, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsEC

Source Section

Ethernet

ethOutErrorsLC_Unit0

Number of outgoing late collisions, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsLC

Source Section

Ethernet

ethOutErrorsLC_Unit1

Number of outgoing late collisions, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsLC

Source Section

Ethernet

ethOutErrorsLO_Unit0

Number of outgoing loss of carrier errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsLO

Source Section

Ethernet

ethOutErrorsLO_Unit1

Number of outgoing loss of carrier errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsLO

Source Section

Ethernet

ethOutErrorsNC_Unit0

Number of outgoing no carrier errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsNC

Source Section

Ethernet

ethOutErrorsNC_Unit1

Number of outgoing no carrier errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsNC

Source Section

Ethernet

ethOutErrorsTO_Unit0

Number of outgoing transmit jabber timeouts, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsTO

Source Section

Ethernet

ethOutErrorsTO_Unit1

Number of outgoing transmit jabber timeouts, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsTO

Source Section

Ethernet

ethOutErrorsTXD_Unit0

Number of transmit descriptor errors (TxD could not be created), unit 0.

Data Source

SGSN

Source Field

ethOutErrorsTXD

Source Section

Ethernet

ethOutErrorsTXD_Unit1

Number of transmit descriptor errors (TxD could not be created), unit 1.

Data Source

SGSN

Source Field

ethOutErrorsTXD

Source Section

Ethernet

ethOutErrorsUF_Unit0

Number of outgoing underflow errors, unit 0.

Data Source

SGSN

Source Field

ethOutErrorsUF

Source Section

Ethernet

ethOutErrorsUF_Unit1

Number of outgoing underflow errors, unit 1.

Data Source

SGSN

Source Field

ethOutErrorsUF

Source Section

Ethernet

ethOutPkts_Unit0

Retired fr 5.0.10.0.0-Total number of packets that higher-level protocols requested to be transmitted, unit 0.

Data Source

SGSN

Source Field

ethOutPkts

Source Section

Ethernet

ethOutPkts_Unit1

Retired fr 5.0.10.0.0-Total number of packets that higher-level protocols requested to be transmitted, unit 1.

Data Source

SGSN

Source Field

ethOutPkts

Source Section

Ethernet

ethOutUcastPkts_Unit0

Total number of packets that higher-level protocols requested to be transmitted.

Data Source

SGSN

Source Field

ethOutUcastPkts

Source Section

Ethernet

ethOutUcastPkts_Unit1

Total number of packets that higher-level protocols requested to be transmitted.

Data Source

SGSN

Source Field

ethOutUcastPkts

Source Section

Ethernet

filterIpsecPacketsOnCPU

Number of packets classified as IPsec by filter on this CPU.

Data Source

SGSN

Source Field

filterIpsecPacketsOnCPU

Source Section

IP Filtering CPU

filterIpsecPacketsOnCPU_IPSecFilter

Number of packets classified as IPsec by filter on this CPU, type 5.

Data Source

SGSN

Source Field

filterIpsecPacketsOnCPU

Source Section

IP Filtering CPU

filterIpsecPacketsOnCPU_normalFilter

Number of packets classified as IPsec by filter on this CPU, type 2.

Data Source

SGSN

Source Field

filterIpsecPacketsOnCPU

Source Section

IP Filtering CPU

filterPacketsAllowedOnCPU

Number of packets allowed by filter on this CPU.

Data Source

SGSN

Source Field

filterPacketsAllowedOnCPU

Source Section

IP Filtering CPU

filterPacketsAllowedOnCPU_IPSecFilter

Number of packets allowed by filter on this CPU, type 5.

Data Source

SGSN

Source Field

filterPacketsAllowedOnCPU

Source Section

IP Filtering CPU

filterPacketsAllowedOnCPU_normalFilter

Number of packets allowed by filter on this CPU, type 2.

Data Source

SGSN

Source Field

filterPacketsAllowedOnCPU

Source Section

IP Filtering CPU

filterPacketsDeniedOnCPU

Number of packets denied by filter on this CPU.

Data Source

SGSN

Source Field

filterPacketsDeniedOnCPU

Source Section

IP Filtering CPU

filterPacketsDeniedOnCPU_IPSecFilter

Number of packets denied by filter on this CPU, type 5.

Data Source

SGSN

Source Field

filterPacketsDeniedOnCPU

Source Section

IP Filtering CPU

filterPacketsDeniedOnCPU_normalFilter

Number of packets denied by filter on this CPU, type 2.

Data Source

SGSN

Source Field

filterPacketsDeniedOnCPU

Source Section

IP Filtering CPU

ggsnGtpcControlLoad

Weighted PDP context load in control of the GGSN-C PIC

Data Source

GGSN

Source Field

ggsnGtpcControlLoad

ggsnGtpcControlPacketDrops

Total number of control packets that have been dropped by this GGSN-C (GTP-C) PIC (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpcControlPacketDrops

Source Section

ggsnGtpcTable

ggsnGtpcCpuUsage

The CPU utilization in percentage of the GGSN-C PIC.

Data Source

GGSN

Source Field

ggsnGtpcCpuUsage

ggsnGtpcMemory

The amount of memory on the GGSN-C PIC, in bytes

Data Source

GGSN

Source Field

ggsnGtpcMemory

ggsnGtpcMemoryUsed

The amount of used memory on the GGSN-C PIC, in bytes.

Data Source

GGSN

Source Field

ggsnGtpcMemoryUsed

ggsnGtpcNbrOfActivePdpContexts

The number of active PDP contexts on this GGSN-C PIC.

Data Source

GGSN

Source Field

ggsnGtpcNbrOfActivePdpContexts

ggsnGtpcNbrOfActPdpContextIpv6

The number of active IPv6 PDP contexts on this GGSN-C PIC.

Data Source

GGSN

ggsnGtpcPdpCapacity

The capacity of the GTP-C PIC.

Data Source

GGSN

Source Field

ggsnGtpcPdpCapacity

Source Section

ggsnGtpcTable

ggsnGtpcRole

The current role of the GTP-C.

Data Source

GGSN

Source Field

ggsnGtpcRole

Source Section

ggsnGtpcTable

ggsnGtpcStatus

The current status of the GTP-C, example BLOCK.

Data Source

GGSN

Source Field

ggsnGtpcStatus

Source Section

ggsnGtpcTable

ggsnGtpcTftFilterDepthMax

The maximum number of TFT filters per user on this GGSN-C PIC in the last statistics update period

Data Source

GGSN

Source Field

ggsnGtpcTftFilterDepthMax

ggsnGtpcTftFilterDepthMean

The mean number of TFT filters per user on this GGSN-C PIC in the last statistics update period

Data Source

GGSN

Source Field

ggsnGtpcTftFilterDepthMean

ggsnGtpuCpuUsage

The CPU utilization in percentage of the GGSN-U PIC.

Data Source

GGSN

Source Field

ggsnGtpuCpuUsage

ggsnGtpuMemory

The amount of memory on the GGSN-U PIC, in bytes.

Data Source

GGSN

Source Field

ggsnGtpuMemory

ggsnGtpuMemoryUsed

The amount of used memory on the GGSN-U PIC, in bytes.

Data Source

GGSN

Source Field

ggsnGtpuMemoryUsed

ggsnGtpuNbrOfActivePdpContexts

The number of active PDP contexts on this GGSN-U PIC.

Data Source

GGSN

Source Field

ggsnGtpuNbrOfActivePdpContexts

ggsnGtpuNbrOfActPdpContxtIpv6

The number of active IPv6 PDP contexts on this GGSN-U PIC.

Data Source

GGSN

ggsnGtpuPayloadLoad

Weighted PDP context load in payload of the GGSN-U PIC

Data Source

GGSN

Source Field

ggsnGtpuPayloadLoad

ggsnGtpuPdpCapacity

The capacity of the GGSN-U (GTP-U) PIC.

Data Source

GGSN

Source Field

ggsnGtpuPdpCapacity

ggsnGtpuRole

The current role of the GGSN-U (GTP-U) PIC .

Data Source

GGSN

Source Field

ggsnGtpuRole

ggsnGtpuStatus

The current status of the GGSN-U (GTP-U) PIC, example BLOCK.

Data Source

GGSN

Source Field

ggsnGtpuStatus

ggsnGtpuUserDownlinkDrops

The number of downlink (GTP-U) packets dropped by this GGSN-U PIC.

Data Source

GGSN

Source Field

ggsnGtpuUserDownlinkDrops

ggsnGtpuUserUplinkDrops

The number of uplink (GTP-U) packets dropped by this GGSN-U PIC.

Data Source

GGSN

Source Field

ggsnGtpuUserUplinkDrops

ggsnPicNbrOfActivePdpContexts

The number of active PDP contexts on a per PIC of this GGSN.

Data Source

GGSN

Source Field

ggsnPicNbrOfActivePdpContexts

Source Section

ggsnPicStatsTable

GSNRelease

Release of GSN

icmpInDestUnreachs

Number of ICMP Destination Unreachable messages received.

Data Source

SGSN

Source Field

icmpInDestUnreachs

Source Section

ICMP

icmpInEchoReps

Number of ICMP Echo Reply messages received.

Data Source

SGSN

Source Field

icmpInEchoReps

Source Section

ICMP

icmpInEchos

Number of ICMP Echo (request) messages received.

Data Source

SGSN

Source Field

icmpInEchos

Source Section

ICMP

icmpInErrors

Number of ICMP messages which the entity received but determined as having ICMPspecific errors

Data Source

SGSN

Source Field

icmpInErrors

Source Section

ICMP

icmpInMsgs

Total number of ICMP messages which the entity received

Data Source

SGSN

Source Field

icmpInMsgs

Source Section

ICMP

icmpInParmProbs

Number of ICMP Parameter Problem messages received.

Data Source

SGSN

Source Field

icmpInParmProbs

Source Section

ICMP

icmpInRedirects

Number of ICMP Redirect messages received.

Data Source

SGSN

Source Field

icmpInRedirects

Source Section

ICMP

icmpInTimeExcds

Number of ICMP Time Exceeded messages received.

Data Source

SGSN

Source Field

icmpInTimeExcds

Source Section

ICMP

icmpOutDestUnreach

Number of ICMP Destination Unreachable messages sent.

Data Source

SGSN

Source Field

icmpOutDestUnreach

Source Section

ICMP

icmpOutEchoReps

Number of ICMP Echo Reply messages sent.

Data Source

SGSN

Source Field

icmpOutEchoReps

Source Section

ICMP

icmpOutEchos

Number of ICMP Echo (request) messages sent.

Data Source

SGSN

Source Field

icmpOutEchos

Source Section

ICMP

icmpOutMsgs

Total number of ICMP messages which this entity attempted to send.

Data Source

SGSN

Source Field

icmpOutMsgs

Source Section

ICMP

icmpOutParmProbs

Number of ICMP Parameter Problem messages sent.

Data Source

SGSN

Source Field

icmpOutParmProbs

Source Section

ICMP

icmpOutRedirects

Number of ICMP Redirect messages sent

Data Source

SGSN

Source Field

icmpOutRedirects

Source Section

ICMP

icmpOutTimeExcds

Number of ICMP Time Exceeded messages sent.

Data Source

SGSN

Source Field

icmpOutTimeExcds

Source Section

ICMP

interfaceType

Interface Type (one of: ATM, BGP, ETH, IP or ALL)

Data Source

SGSN

Source Section

GPRS General

ipForwDatagrams

Number of input datagrams for which this entity was not their final IP destination

Data Source

SGSN

Source Field

ipForwDatagrams

Source Section

IP

ipFragCreates

Number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

SGSN

Source Field

ipFragCreates

Source Section

IP

ipFragFails

Number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be

Data Source

SGSN

Source Field

ipFragFails

Source Section

IP

ipFragOKs

Number of IP datagrams that have been fragmented at this entity.

Data Source

SGSN

Source Field

ipFragOKs

Source Section

IP

ipInAddrErrors

Number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address

Data Source

SGSN

Source Field

ipInAddrErrors

Source Section

IP

ipInHdrErrors

Number of input datagrams discarded due to errors in their IP headers

Data Source

SGSN

Source Field

ipInHdrErrors

Source Section

IP

ipInReceives

Total number of input datagrams received from interfaces, including those received in error.

Data Source

SGSN

Source Field

ipInReceives

Source Section

IP

ipOutNoRoutes

Number IP datagrams discarded because no route could be found to transmit them to their destination

Data Source

SGSN

Source Field

ipOutNoRoutes

Source Section

IP

ipReasmFails

Number of failures detected by the IP re-assembly algorithm for whatever reason

Data Source

SGSN

Source Field

ipReasmFails

Source Section

IP

ipReasmOKs

Number of IP datagrams successfully re-assembled.

Data Source

SGSN

Source Field

ipReasmOKs

Source Section

IP

ipReasmReqds

Number IP fragments received which needed to be reassembled at this entity.

Data Source

SGSN

Source Field

ipReasmReqds

Source Section

IP

ipsecIncorrectPackets

Number of packets not processed

Data Source

SGSN

Source Field

ipsecIncorrectPackets

Source Section

IPsec/GRE CPU

ipsecIssIllegalSpi

Number of incoming packets which spi does not have an SA in IPSEC SAD.

Data Source

SGSN

Source Field

ipsecIssIllegalSpi

Source Section

IPsec/GRE CPU

ipsecIssInOkPackets

Number of packets which has been processed correctly, coming in.

Data Source

SGSN

Source Field

ipsecIssInOkPackets

Source Section

IPsec/GRE CPU

ipsecIssMd5Mismatch

Number of times the comparison between the given value and the calculated (with md5 alg.) value did not match.

Data Source

SGSN

Source Field

ipsecIssMd5Mismatch

Source Section

IPsec/GRE CPU

ipsecIssOutOkPackets

Number of packets which has been processed correctly, going out.

Data Source

SGSN

Source Field

ipsecIssOutOkPackets

Source Section

IPsec/GRE CPU

ipsecIssSha1Mismatch

Number of times the comparison between the given value and the calculated (with sha1 alg.) value did not match.

Data Source

SGSN

Source Field

ipsecIssSha1Mismatch

Source Section

IPsec/GRE CPU

ipsecWaPacketsProcessed

This counter is only to be used as a randomizer for the function that drops packets during high CPU load

Data Source

SGSN

Source Field

ipsecWaPacketsProcessed

Source Section

IPsec/GRE CPU

ospfExternLsaCount

Number of external (LS type 5) link-state advertisements in the link-state database.

Data Source

SGSN

Source Field

ospfExternLsaCount

Source Section

OSPF CPU

ospfOriginateNewLsas

Number of new link-state advertisements that have been originated

Data Source

SGSN

Source Field

ospfOriginateNewLsas

Source Section

OSPF CPU

ospfRxNewLsas_R21

Number of link-state advertisements received determined to be new instantiations

Data Source

SGSN

Source Field

ospfRxNewLsas

Source Section

OSPF CPU

OutErrors

The nr of ICMP mess which entity did not send due to probl disco within ICMP

Data Source

SGSN

Source Field

icmpOutErrors

Source Section

ICMP

Release_SNMP_GGSN

Release

Data Source

GGSN

Source Field

Release_SNMP_GGSN

Source Section

Card General

Connection Primitive Calculations

The following is a list of primitive calculations for the Connection entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

Connection Peg Counts

The following is a list of peg counts for the Connection entity.

collectionPeriod

GPRS General

Data Source

SGSN

filterPackets_in_30

Number of packets classified as IPsec by filter, in.

Data Source

SGSN

Source Field

filterIpsecPackets

Source Section

IP Filtering Interface/SA

filterPackets_out_30

Number of packets classified as IPsec by filter, out.

Data Source

SGSN

Source Field

filterIpsecPackets

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_in_30

Number of packets allowed by filter, in.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_out_30

Number of packets allowed by filter, out.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsDenied_in_30

Number of packets denied by filter, in.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

filterPacketsDenied_out_30

Number of packets denied by filter, out.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

GSNRelease

Release of GSN

Data Source

SGSN

DestClass Primitive Calculations

The following is a list of primitive calculations for the DestClass entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

DestClass Peg Counts

The following is a list of peg counts for the DestClass entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

DestClass General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

DestClass General

jnxDcuStatsBytes

The number of bytes received on this interface, belonging to this address family that match this Destination Class.

Data Source

GGSN

Source Field

jnxDcuStatsBytes

Source Section

jnxDcuStatsEntry

jnxDcuStatsPackets

The number of packets received on this interface, belonging to this address family that match this Destination Class.

Data Source

GGSN

Source Field

jnxDcuStatsPackets

Source Section

jnxDcuStatsEntry

DHCP Primitive Calculations

The following is a list of primitive calculations for the DHCP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

DHCP Peg Counts

The following is a list of peg counts for the DHCP entity.

collectionPeriod

Period Length

Data Source

GGSN

ggsnDhcpClientRepliesDiscarded

Number of replies received and dropped by the GGSN from this DHCP server (SNMP DataStream)

Data Source

GGSN

Source Field

`ggsnDhcpClientRepliesDiscarded`

Source Section

`ggsnDhcp`

ggsnDhcpClientRepliesReceived

Number of replies received by the GGSN from this DHCP server (SNMP DataStream)

Data Source

GGSN

Source Field

`ggsnDhcpClientRepliesReceived`

Source Section

ggsnDhcp

ggsnDhcpClientRequestsSent

Number of Request sent by the GGSN to this DHCP server (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnDhcpClientRequestsSent

Source Section

ggsnDhcp

Release_Dhcp

Period Length

Data Source

GGSN

DLCI Primitive Calculations

The following is a list of primitive calculations for the DLCI entity.

DLCIGOS

Dimensioned Grade of Service

Calculation

Gb_FR_TrafficRX

Total Amount of data transmitted on the Gb interface at the Fr layer received , in Kbytes
(including headers)

Calculation

$(\text{frPvcRxBytes} * 1.0) / 1024.0$

Gb_FR_TrafficTX

Total Amount of data transmitted on the Gb interface at the Fr layer transmitted , in Kbytes
(including headers)

Calculation

$(\text{frPvcTxBytes} * 1.0) / 1024.0$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

MaxCIR

Max committed data transfer rate (in bits per second) is the maximum information capacity of the virtual circuit i.e. PVC, that is guaranteed to a particular subscriber on a particular DLCI.

Calculation

frPvcCirHiWat

MinCIR

Min committed data transfer rate (in bits per second) is the minimum of CIR of the virtual circuit i.e. PVC, that is guaranteed to a particular subscriber on a particular DLCI.

Calculation

frPvcCirLoWat

NUMDAYS

of days in Report

Calculation

$\text{DAYSINREPORT}()$

NUMHOURS

of hours in Summation Data

Calculation

pDisEligRx

Discard Eligibility Rate Receive indicates the rate that the received frames are to be discarded in case of overload. This indication can be regarded as a prioritising function, although frames without a DE indication can also be discarded.

Calculation

$$\text{frPvcRxDe} * 100.0 / \text{frPvcRxFrames}$$

pDisEligTx

Discard Eligibility Rate indicates the rate that the transmitted frames are to be discarded in case of overload. This indication can be regarded as a prioritising function, although frames without a DE indication can also be discarded.

Calculation

$$\text{frPvcTxDe} * 100.0 / (\text{frPvcTxFrames} * 1.0)$$

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

$$\text{nullInt}()$$

UtilizationRX

Utilization RX shows the Quality of reception in the sense of not experiencing any congestion on a PVC link on a particular DLCI.

Calculation

$$(\text{frPvcRxFrames} - \text{frPvcRxStops}) * 100.0 / (\text{frPvcRxFrames} * 1.0)$$

UtilizationTX

Utilization TX shows the Quality of transmission in the sense of not experiencing any congestion on a PVC link on a particular DLCI.

Calculation

$$(\text{frPvcTxFrames} - \text{frPvcTxStops}) * 100.0 / (\text{frPvcTxFrames} * 1.0)$$

DLCI Peg Counts

The following is a list of peg counts for the DLCI entity.

collectionPeriod

GPRS General

Data Source

SGSN

frMfeRxDiscards

Incoming PDUs/fragments discarded

Data Source

SGSN

Source Field

frMfeRxDiscards

Source Section

Frame Relay MFE

frMfeRxFragmentedPDUs

Fragmented PDUs received

Data Source

SGSN

Source Field

frMfeRxFragmentedPDUs

Source Section

Frame Relay MFE

frMfeRxFragments

Fragments received

Data Source

SGSN

Source Field

frMfeRxFragments

Source Section

Frame Relay MFE

frMfeRxPDUs

PDUs successfully received

Data Source

SGSN

Source Field

frMfeRxPDUs

Source Section

Frame Relay MFE

frMfeRxReassemblyMismatch

Missing fragment(s) detected

Data Source

SGSN

Source Field

frMfeRxReassemblyMismatch

Source Section

Frame Relay MFE

frMfeRxReassemblyTooBig

Incoming PDUs too large

Data Source

SGSN

Source Field

frMfeRxReassemblyTooBig

Source Section

Frame Relay MFE

frMfeTxBlocked

Outgoing PDUs blocked

Data Source

SGSN

Source Field

frMfeTxBlocked

Source Section

Frame Relay MFE

frMfeTxDiscards

Outgoing PDUs discarded

Data Source

SGSN

Source Field

frMfeTxDiscards

Source Section

Frame Relay MFE

frMfeTxFragmentedPDUs

Outgoing PDUs fragmented

Data Source

SGSN

Source Field

frMfeTxFragmentedPDUs

Source Section

Frame Relay MFE

frMfeTxFragmentErrors

Fragmentation errors

Data Source

SGSN

Source Field

frMfeTxFragmentErrors

Source Section

Frame Relay MFE

frMfeTxFragments

Fragments successfully sent

Data Source

SGSN

Source Field

frMfeTxFragments

Source Section

Frame Relay MFE

frMfeTxPDUs

PDUs successfully sent

Data Source

SGSN

Source Field

frMfeTxPDUs

Source Section

Frame Relay MFE

frPvcCirHiWat

Committed information rate high water mark (PVC)

Data Source

SGSN

Source Field

frPvcCirHiWat

Source Section

Frame Relay PVC

frPvcCirLoWat

Committed information rate low water mark (PVC)

Data Source

SGSN

Source Field

frPvcCirLoWat

Source Section

Frame Relay PVC

frPvcRxBECNs

BECN bit set on received frame count (PVC).

Data Source

SGSN

Source Field

frPvcRxBECNs

Source Section

Frame Relay PVC

frPvcRxBytes

Total number of bytes received (PVC).

Data Source

SGSN

Source Field

frPvcRxBytes

Source Section

Frame Relay PVC

frPvcRxDe

Discard eligibility receive total (PVC).

Data Source

SGSN

Source Field

frPvcRxDe

Source Section

Frame Relay PVC

frPvcRxFECNs

FECN bit set on received frame count (PVC).

Data Source

SGSN

Source Field

frPvcRxFECNs

Source Section

Frame Relay PVC

frPvcRxFrames

Total number of frames received (PVC).

Data Source

SGSN

Source Field

frPvcRxFrames

Source Section

Frame Relay PVC

frPvcRxStops

Failed can puts to upper read queue (PVC).

Data Source

SGSN

Source Field

frPvcRxStops

Source Section

Frame Relay PVC

frPvcTxBytes

Total number of bytes transmitted (PVC).

Data Source

SGSN

Source Field

frPvcTxBytes

Source Section

Frame Relay PVC

frPvcTxDe

Discard eligibility transmit total (PVC).

Data Source

SGSN

Source Field

frPvcTxDe

Source Section

Frame Relay PVC

frPvcTxFrames

Total number of frames transmitted (PVC).

Data Source

SGSN

Source Field

frPvcTxFrames

Source Section

Frame Relay PVC

frPvcTxStops

Number of congested transmit frames (PVC).

Data Source

SGSN

Source Field

frPvcTxStops

Source Section

Frame Relay PVC

GSNRelease

Release of GSN

Data Source

SGSN

ForwardClass Primitive Calculations

The following is a list of primitive calculations for the ForwardClass entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

ForwardClass Peg Counts

The following is a list of peg counts for the ForwardClass entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

ForwardClass General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

ForwardClass General

jnxCosIfqHpNonTcpRedDropByteRate

The rate at which high PLP non TCP bytes belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpNonTcpRedDropByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpNonTcpRedDropBytes

The total number of high PLP (Packet Loss Priority) non TCP bytes belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpNonTcpRedDropBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpNonTcpRedDropPktRate

The rate at which high PLP non TCP packets belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpNonTcpRedDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpNonTcpRedDropPkts

The total number of high PLP nonTCP packets belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpNonTcpRedDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpTcpRedDropByteRate

The rate at which high PLP TCP bytes belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpTcpRedDropByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpTcpRedDropBytes

The total number of high PLP TCP bytes belonging to the specified forwarding class RED-dropped at the output on the given interface

Data Source

GGSN

Source Field

jnxCosIfqHpTcpRedDropBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpTcpRedDropPktRate

The rate (expressed in packets per second) at which high PLP (Packet Loss Priority) TCP packets belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpTcpRedDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqHpTcpRedDropPkts

The total number of high PLP (Packet Loss Priority) TCP packets belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqHpTcpRedDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpNonTcpRedDropByteRate

The rate at which low PLP non TCP bytes belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpNonTcpRedDropByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpNonTcpRedDropBytes

The total number of low PLP (Packet Loss Priority) non TCP bytes belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpNonTcpRedDropBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpNonTcpRedDropPktRate

The rate (expressed in packets per second) at which low PLP (Packet Loss Priority) non TCP packets belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpNonTcpRedDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpNonTcpRedDropPkts

The total number of low PLP (Packet Loss Priority) non TCP packets belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpNonTcpRedDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpTcpRedDropByteRate

The rate at which low PLP TCP bytes belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpTcpRedDropByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpTcpRedDropBytes

The total number of low PLP TCP bytes belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpTcpRedDropBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpTcpRedDropPktRate

The rate at which low PLP TCP packets belonging to the specified forwarding class, were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpTcpRedDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqLpTcpRedDropPkts

The total number of low PLP (Packet Loss Priority) TCP packets belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqLpTcpRedDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqQedByteRate

The rate at which bytes belonging to the specified forwarding class were queued at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqQedByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqQedBytes

Number of bytes of specified forwarding class queued at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqQedBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqQedPktRate

The rate at which packets belonging to the the specified forwarding class were queued at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqQedPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqQedPkts

The total number of packets of specified forwarding class queued at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqQedPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTailDropPktRate

The rate at which packets belonging to the specified forwarding class were tailedropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTailDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTailDropPkts

The total number of packets of specified forwarding class dropped due to tail dropping at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTailDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTotalRedDropByteRate

The rate at which bytes belonging to the specified forwarding class were RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTotalRedDropByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTotalRedDropBytes

The total number of bytes belonging to the specified forwarding class RED-dropped at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTotalRedDropBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTotalRedDropPktRate

The most recent estimate of per-second RED-dropped packets for the specified forwarding class at the output on the given interface

Data Source

GGSN

Source Field

jnxCosIfqTotalRedDropPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTotalRedDropPkts

Total number of packets belonging to the specified forwarding class dropped due to RED at the output on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTotalRedDropPkts

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTxedByteRate

The current output byte rate for the specified forwarding class on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTxedByteRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTxedBytes

Total number of bytes belonging to specified forwarding class, transmitted on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTxedBytes

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTxedPktRate

The rate at which packets of specified forwarding class are transmitted on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTxedPktRate

Source Section

jnxCosIfqStatsEntry

jnxCosIfqTxedPkts

Number of packets of specified forwarding class transmitted on the given interface.

Data Source

GGSN

Source Field

jnxCosIfqTxedPkts

Source Section

jnxCosIfqStatsEntry

GSN Available Data Fields

The following is a list of available data fields for the GSN entity.

CGSN_AvailableDataPct

CGSN Available Data Pct

GGSN_CLI_AvailableDataPct

GGSN_CLI Available Data Pct

GGSN_Snmp_AvailableDataPct

GGSN_Snmp Available Data Pct

SGSN_AvailableDataPct

SGSN Available Data Pct

GSN Primitive Calculations

The following is a list of primitive calculations for the GSN entity.

attActPdpContextMSPerSgsn

Retired fr 5.0.11.0.11. Replaced by SMatActPdpContextG. The counter is incremented for each Activate PDP Context Request received on the Gb Interface

Calculation

SMAttActPdpContextG

attDeactPdpContextGgsnPerSgsn

Retired fr 5.0.10.0.0. Replaced by SMatDeactPdpContextGgsnG. The counter is incremented for each Deactivate PDP Context Request received on the Gn Interface

Calculation

SMAttDeactPdpContextGgsnG

attDeactPdpContextMsPerSgsn

Retired fr 5.0.10.0.0. Replaced by SMatDeactPdpContextMsG. The counter is incremented for each Deactivate PDP Context Request received on the Gb Interface

Calculation

SMAttDeactPdpContextMsG

AverageCapGTP_CPICallGGSN

Average capacity of the GTP-C PIC on all GGSNs

Calculation

```
aggr (Card, ggsnGtpcPdpCapacity )
```

ethInErrors

Number of incoming errors.

Calculation

```
AGGR(Card, vsum(ethInErrors_Unit0, ethInErrors_Unit1))
```

ethInErrorsBUF

Number of incoming buffer errors.

Calculation

```
AGGR(Card, vsum(ethInErrorsBUF_Unit0, ethInErrorsBUF_Unit1))
```

ethInErrorsCE

Number of incoming CRC errors.

Calculation

```
AGGR(Card, vsum(ethInErrorsCE_Unit0, ethInErrorsCE_Unit1))
```

ethInErrorsCLBLK

Number of incoming clblk errors.

Calculation

```
AGGR(Card, vsum(ethInErrorsCLBLK_Unit0, ethInErrorsCLBLK_Unit1))
```

ethInErrorsCS

Number of incoming collisions seen.

Calculation

```
AGGR(Card, vsum(ethInErrorsCS_Unit0, ethInErrorsCS_Unit1))
```

ethInErrorsFF

Failed the address recognition filtering.

Calculation

```
AGGR(Card, vsum(ethInErrorsFF_Unit0, ethInErrorsFF_Unit1))
```

ethInErrorsMBLK

Number of incoming mblock errors.

Calculation

```
AGGR(Card, vsum(ethInErrorsMBLK_Unit0, ethInErrorsMBLK_Unit1))
```

ethInErrorsRF

Number of runt frames (frames damaged by collision).

Calculation

```
AGGR(Card, vsum(ethInErrorsRF_Unit0, ethInErrorsRF_Unit1))
```

ethInErrorsTL

Ethernet frame too long.

Calculation

```
AGGR(Card, vsum(ethInErrorsTL_Unit0, ethInErrorsTL_Unit1))
```

ethInMF

Retired fr 5.0.10.0.0-Ethernet Multicast frames received.

Calculation

```
AGGR(Card, vsum(ethInMF_Unit0, ethInMF_Unit1))
```

ethInPkts

Retired fr 5.0.10.0.0-The total nr of packets, delivered by this sub-layer to a higher (sub-)layer.

Calculation

```
AGGR(Card, vsum(ethInPkts_Unit0, ethInPkts_Unit1))
```

ethOutErrorOWN

Number of outgoing own errors.

Calculation

```
AGGR(Card, vsum(ethOutErrorOWN_Unit0, ethOutErrorOWN_Unit1))
```

ethOutErrors

Number of outbound errors.

Calculation

```
AGGR(Card, vsum(ethOutErrors_Unit0, ethOutErrors_Unit1))
```

ethOutErrorsBUF

Number of outgoing buffer errors.

Calculation

```
AGGR(Card, vsum(ethOutErrorsBUF_Unit0, ethOutErrorsBUF_Unit1))
```

ethOutErrorsEC

Number of outgoing excessive collisions.

Calculation

```
AGGR(Card, vsum(ethOutErrorsEC_Unit0, ethOutErrorsEC_Unit1))
```

ethOutErrorsLC

Number of outgoing late collisions.

Calculation

```
AGGR(Card, vsum(ethOutErrorsLC_Unit0, ethOutErrorsLC_Unit1))
```

ethOutErrorsLO

Number of outgoing loss of carrier errors.

Calculation

```
AGGR(Card, vsum(ethOutErrorsLO_Unit0, ethOutErrorsLO_Unit1))
```

ethOutErrorsNC

Number of outgoing no carrier errors.

Calculation

```
AGGR(Card, vsum(ethOutErrorsNC_Unit0, ethOutErrorsNC_Unit1))
```

ethOutErrorsTO

Number of outgoing transmit jabber timeouts.

Calculation

```
AGGR(Card, vsum(ethOutErrorsTO_Unit0, ethOutErrorsTO_Unit1))
```

ethOutErrorsTXD

Number of transmit descriptor errors (TxD could not be created).

Calculation

```
AGGR(Card, vsum(ethOutErrorsTXD_Unit0, ethOutErrorsTXD_Unit1))
```

ethOutErrorsUF

Number of outgoing underflow errors.

Calculation

```
AGGR(Card, vsum(ethOutErrorsUF_Unit0, ethOutErrorsUF_Unit1))
```

ethOutPkts

Retired fr 5.0.10.0.0-The total nr of packets that higher-level protocols requested to be transmitted

Calculation

```
AGGR(Card, vsum(ethOutPkts_Unit0, ethOutPkts_Unit1))
```

filterAllowedPacketsOnSlot

Number of packets allowed by filter on this CPU.

Calculation

```
AGGR(Card, filterPacketsAllowedOnCPU)
```

filterDeniedPacketsOnSlot

Number of packets denied by filter on this CPU.

Calculation

```
AGGR(Card, filterPacketsDeniedOnCPU)
```

filterIpssecPacketsOnSlot

Number of packets classified as IPsec by filter on this CPU.

Calculation

```
AGGR(Card, filterIpssecPacketsOnCPU)
```

gprsMmSgsnUnsuccessfulPagingProcedures

Retired fr 5.0.10.0.0-Unsuccessful paging procedures per SGSN.

Calculation

```
gprsMmUnsuccessfulPagingProcedures
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

icmpInDestUnreachs

Number of ICMP Destination Unreachable messages received.

Calculation

AGGR(Card, icmpInDestUnreachs)

icmpInDestUnreachsRate

ICMP Destination Unreachable Rate shows Ratio of ICMP Destination Unreachable messages received to total ICMP messages received.

Calculation

$(\text{jnxicmpInDestUnreachs} * 100.0) / (1.0 * \text{jnxicmpInMsgs})$

icmpInEchoReps

Number of ICMP Echo Reply messages received.

Calculation

AGGR(Card, icmpInEchoReps)

icmpInEchos

Number of ICMP Echo (request) messages received.

Calculation

AGGR(Card, icmpInEchos)

icmpInErrorRate

Icmp Error Rate shows the ratio of ICMP messages which the entity received but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc. to the total ICMP Messages

Calculation

$(\text{jnxicmpInErrors} * 100.0) / (1.0 * \text{jnxicmpInMsgs})$

icmpInErrors

Nr of ICMP mess which the entity rec but determ as having ICMP-specific errors

Calculation

AGGR(Card, icmpInErrors)

icmpInMsgs

Total nr of ICMP messages which the entity received

Calculation

AGGR(Card, icmpInMsgs)

IcmpInMsgsSucc

ICMP messages which the entity received success rate

Calculation

$$100 * (1 - ((icmpInDestUnreachs + icmpInRedirects + icmpOutDestUnreachs + icmpOutErrors) * 1.0 / (icmpInMsgs + icmpInDestUnreachs + icmpInRedirects + icmpOutDestUnreachs + icmpOutErrors)))$$

icmpInParmProbs

Number of ICMP Parameter Problem messages received.

Calculation

AGGR(Card, icmpInParmProbs)

icmpInRedirects

Number of ICMP Redirect messages received.

Calculation

AGGR(Card, icmpInRedirects)

icmpInTimeExcds

Number of ICMP Time Exceeded messages received.

Calculation

AGGR(Card, icmpInTimeExcds)

icmpOutDestUnreachs

Number of ICMP Destination Unreachable messages sent.

Calculation

AGGR(Card, icmpOutDestUnreach)

icmpOutDestUnreachsRate

ICMP Error Rate is ratio between the number of ICMP messages which this entity did not send and the total number of ICMP messages which this entity attempted to send.

Calculation

$$(jnxicmpOutDestUnreachs * 100.0) / (1.0 * jnxicmpOutMsgs)$$

icmpOutEchoReps

Number of ICMP Echo Reply messages sent.

Calculation

AGGR(Card, icmpOutEchoReps)

icmpOutEchos

Number of ICMP Echo (request) messages sent.

Calculation

AGGR(Card, icmpOutEchos)

icmpOutErrors

The nr of ICMP mess which entity did not send due to probl disco within ICMP

Calculation

AGGR(Card, OutErrors)

icmpOutErrorsRate

ICMP Error Rate is ratio between the number of ICMP messages which this entity did not send and the total number of ICMP messages.

Calculation

$$(\text{jnxicmpOutErrors} * 100.0) / (1.0 * \text{jnxicmpOutMsgs})$$

icmpOutMsgs

Total number of ICMP messages which this entity attempted to send.

Calculation

AGGR(Card, icmpOutMsgs)

icmpOutParmProbs

Number of ICMP Parameter Problem messages sent.

Calculation

AGGR(Card, icmpOutParmProbs)

icmpOutRedirects

nr of ICMP Redirect messages sent. For a host this object will always be zero

Calculation

AGGR(Card, icmpOutRedirects)

icmpOutTimeExcds

Number of ICMP Time Exceeded messages sent.

Calculation

AGGR(Card, icmpOutTimeExcds)

ipForwDatagrams

Nr of input datagrams for which this entity was not their final IP destination

Calculation

AGGR(Card, ipForwDatagrams)

ipForwDatagramsRate

IP Forwarding Datagram Rate shows the ratio of input datagrams forwarded to total IP datagrams.capability of the routing.

Calculation

$$\left(\text{jnxipForwDatagrams} * 100.0 \right) / \left(1.0 * \text{vsum}(\text{jnxipForwDatagrams}, \text{jnxipInDelivers}, \text{jnxipInAddrErrors}, \text{jnxipInDiscards}, \text{jnxipInHdrErrors}, \text{jnxipInUnknownProtos}) \right)$$

ipFragCreates

nr of IP datagram fragm that have been generated as result of fragm at entity.

Calculation

AGGR(Card, ipFragCreates)

ipFragFails

Nr of IP datagrams that have been disca because needs to be fragme at entity

Calculation

AGGR(Card, ipFragFails)

ipFragFailsRate

IP Fragmentation Failure Rate shows the ratio of IP datagrams that have been discarded because they needed to be fragmented at this entity.

Calculation

$$\left(\text{jnxipFragFails} * 100.0 \right) / \left(1.0 * \text{vsum}(\text{jnxipFragCreates}, \text{jnxipFragFails}) \right)$$

ipFragOKs

Number of IP datagrams that have been fragmented at this entity.

Calculation

AGGR(Card, ipFragOKs)

ipInAddrErrors

Nr of input datagram disc bec the IP adr in their IP destinat field not valid

Calculation

AGGR(Card, ipInAddrErrors)

ipInAddrErrorsRate

IP address error rate shows the ratio number of input datagrams discarded and total IP Packets.

Calculation

```
( jnxipInAddrErrors * 100.0 ) / ( 1.0 * vsum(jnxipForwDatagrams, jnxipInDel-  
ivers, jnxipInAddrErrors, jnxipInDiscards, jnxipInHdrErrors, jnxipInUn-  
knownProtos) )
```

ipInDeliversRate

IP Successful Delivery Rate shows the ratio of successful datagrams delivered to IP user-protocols, to total incoming datagrams.

Calculation

```
( jnxipInDelivers * 100.0 ) / ( 1.0 * vsum (jnxipForwDatagrams, jnxipInDel-  
ivers, jnxipInAddrErrors, jnxipInDiscards, jnxipInHdrErrors, jnxipInUn-  
knownProtos) )
```

ipInDiscardsRate

Ip Discard Rate shows the ratio of input IP datagrams for which no problems were encountered to prevent their continued processing, but which were discarded.

Calculation

```
( jnxipInDiscards * 100.0 ) / ( 1.0 * vsum(jnxipForwDatagrams, jnxipInDel-  
ivers, jnxipInAddrErrors, jnxipInDiscards, jnxipInHdrErrors, jnxipInUn-  
knownProtos) )
```

ipInHdrErrors

Nr of input datagrams discarded due to errors in their IP headers

Calculation

AGGR(Card, ipInHdrErrors)

ipInHdrErrorsRate

Ip Header Error Rate shows the ratio of input datagrams discarded due to errors in their IP headers.

Calculation

```
( jnxipInHdrErrors * 100.0 ) / ( 1.0 * vsum(jnxipForwDatagrams, jnxipInDel-  
ivers, jnxipInAddrErrors, jnxipInDiscards, jnxipInHdrErrors, jnxipInUn-  
knownProtos) )
```

ipInReceives

Total nr of input datagrams rec from interfaces, including those rec in error

Calculation

```
AGGR(Card, ipInReceives)
```

ipOutDiscardsRate

IP Discard Rate is the ratio of output IP datagrams Discarded to total number of output datagrams.

Calculation

```
( jnxipOutDiscards * 100.0 ) / ( 1.0 * vsum ( jnxipOutDiscards, jnxipOutRe-  
quests, jnxipOutNoRoutes ) )
```

ipOutNoRoutes

Nr IP datagrams disc because no route could be found to transmit them to dest

Calculation

```
AGGR(Card, ipOutNoRoutes)
```

ipReasmFails

Nr of fail detect by the IP re-assembly algorithm for reason timed out errors

Calculation

```
AGGR(Card, ipReasmFails)
```

ipReasmFailsRate

IP Datagram Segmentation Failure Rate shows the ratio of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc) to total IP Datagrams that needs fragmentation.

Calculation

```
( jnxipReasmFails * 100.0 ) / ( 1.0 * vsum( jnxipReasmFails, jnxipReasm-  
Reqds) )
```

ipReasmOKs

Number of IP datagrams successfully re-assembled.

Calculation

AGGR(Card, ipReasmOKs)

ipReasmReqds

Number IP fragments received which needed to be reassembled at this entity.

Calculation

AGGR(Card, ipReasmReqds)

ipsecIncorrectPackets

Nr of packets not processed

Calculation

AGGR(Card, ipsecIncorrectPackets)

ipsecIssIllegalSpi

Number of incoming packets which spi does not have an SA in IPSEC SAD.

Calculation

AGGR(Card, ipsecIssIllegalSpi)

ipsecIssInOkPackets

Number of packets which has been processed correctly, coming in.

Calculation

AGGR(Card, ipsecIssInOkPackets)

ipsecIssMd5Mismatch

Nr of times the comparison between the given value and the calculated

Calculation

AGGR(Card, ipsecIssMd5Mismatch)

ipsecIssOutOkPackets

Number of packets which has been processed correctly, going out.

Calculation

AGGR(Card, ipsecIssOutOkPackets)

ipsecIssSha1Mismatch

Nr of times the comparison between the given value and the calc

Calculation

AGGR(Card, ipsecIssSha1Mismatch)

ipsecWaPacketsProcessed

This count only used as a random for the funct that drops packet high CPU load

Calculation

AGGR(Card, ipsecWaPacketsProcessed)

MMAttGprsAttachU

Attempted GPRS attach procedures initiated in this SGSN area

Calculation

AGGR(RA_GSN, MMAttGprsAttachU)

MMAttGprsDetachMsU

Number of attempted GPRS detach procedures initiated by MS in this SGSN area

Calculation

AGGR(RA_GSN, MMAttGprsDetachMsU)

MMAttGprsDetachSgsnU

Number of attempted GPRS detach procedures initiated by SGSN

Calculation

AGGR(RA_GSN, MMAttGprsDetachSgsnU)

MMAttInterSgsnRaUpdateU

No of att inter-SGSN Routing Area Update procedures initiated in this SGSN area

Calculation

AGGR(RA_GSN, MMAttInterSgsnRaUpdateU)

MMAttIntraSgsnRaUpdateU

Attempted intra-SGSN Routing Area Update procedures initiated in this SGSN area

Calculation

AGGR(RA_GSN, MMAttIntraSgsnRaUpdateU)

MMNbrActAttachedSubG

Number of attached subscriber within this SGSN area.

Calculation

nbrOfAttachedSub

MMSuccInterSgsnRaUpdateU

No of succ comp inter-SGSN Routing Area Update Proc initiated in this SGSN area

Calculation

AGGR(RA_GSN, MMSuccInterSgsnRaUpdateU)

MMUnsuccAttachCC14G

Number of unsuccessful GPRS attach requests, where the Cause code in the Attach Reject is Cause Code #14

Calculation

gprsMmSgsnUnsuccAttachRequestsCC14

MMUnsuccAttachCC8G

Number of unsuccessful Combined GPRS/IMSI attach, where the Cause code in the Attach Reject is Cause Code #8

Calculation

gprsMmSgsnUnsuccessfulAttachRequestsCC8

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

ospfExternLsaCount

Nr of external (LS type 5) link-state advertisements in the link-state database

Calculation

AGGR(Card, ospfExternLsaCount)

ospfOriginateNewLsas

Nr of new link-state advertisements (LSA) that have been originated

Calculation

AGGR(Card, ospfOriginateNewLsas)

ospfRxNewLsas

Nr of link-state advertisements received determined to be new instantiations.

Calculation

AGGR(Card, ospfRxNewLsas_R21)

Payload_DL_SGSN

SGSN payload traffic in downlink measured on the Iu interface (MB)

Calculation

S_PayloadgtpuOutDataOctIu / (1024.0 * 1024)

Payload_UL_SGSN

SGSN payload traffic in uplink measured on the Iu interface (MB)

Calculation

S_PayloadgtpuInDataOctIu / (1024.0 * 1024)

pdropPackRatedownAllSGSN

Total Average Packet Success Rate of overall Packets send from this GGSN to all SGSNs connected to it.

Calculation

AGGR(SGSN_GGSN, protect(vsum(100, -1 * pSGSN_GGSNdropPackRatedown)))

pdropPackRateupAllSGSN

Total Average Packet Success Rate of overall Packets received in this GGSN from all SGSNs connected to it.

Calculation

AGGR(SGSN_GGSN, protect(vsum(100, -1 * pSGSN_GGSNdropPackRateup)))

pGGSNPacketSuccessRate

GGSN Packet Success Rate is the Success Factor of the overall Packets sent to and Received from an Speciefic GGSN. Each success factor is weighted by the is weighted by percentage of total packets in either uplink or downlink direction

Calculation

```
((1- vsum( jnxggsnUplinkDrops * jnxggsnUplinkPackets, jnxggsnDownlinkDrops  
* jnxggsnDownlinkPackets) ) * 100.0) / (1.0 * vsum(jnxggsnUplinkPackets,  
jnxggsnDownlinkPackets ) )
```

pGprsAttchFail

Attach failure rate has a close connection to GPRS service accessibility of SGSN

Calculation

```
(vsum(gprsMmSgsnUnsuccessfulAttachRequests, attGprsAttach, attCombiAttach,  
attImsiAttach, -1.0* succGprsAttach, -1 * succCombiAttach, -1 * succImsiAt-  
tach) * 100.0 ) / (1.0 * vsum( gprsMmSgsnAttachRequests, attGprsAttach,  
attCombiAttach, attImsiAttach ))
```

pGTPaveragePacketSizeUpLink

Average packet size is the ratio between bytes send and number of packets in uplink

Calculation

```
(ggsnGtpUplinkBytes * 1.0) / ( 1.0 * ggsnGtpUplinkPackets)
```

pGTPaverPackSizeDownlinkGGSN

Average packet size is the ratio between bytes send and number of packets in downlink

Calculation

```
( ggsnGtpDownlinkBytes * 1.0) / ( 1.0 * ggsnGtpDownlinkPackets)
```

pGTPpacketDropRateDownlink

GTP Packet Drop Rate is the ratio between dropped packets and sent packets in Downlink direction in the GGSN

Calculation

```
(jnxggsnDownlinkDrops * 100.0) / (1.0 * jnxggsnDownlinkPackets)
```

pGTPpacketDropRateUpLink

GTP Packet Drop Rate is the ratio between dropped packets and sent packets in Uplink direction in the GGSN

Calculation

$$(\text{jnxggsnUplinkDrops} * 100) / (1.0 * \text{ggsnGtpUplinkPackets})$$

pInterSgsnRoutUpdFailpSgsn

Inter SGSN Routing area update failure rate has a close connection with the Quality of GPRS Mobility management between different Routing Areas

Calculation

$$(\text{vsum}(\text{gprsMmSgsnUnsuccInterRoutingAreaUpdReq}, \text{attInterSgsnRaUpdate}, -1.0 * \text{succInterSgsnRaUpdate}, 0) * 100.0) / (1.0 * \text{vsum}(\text{gprsMmSgsnInterRoutingAreaUpdateRequests}, \text{attInterSgsnRaUpdate}))$$

pIntraSgsnRoutUpdFailpSgsn

Intra SGSN Routing area update failure rate has a close connection with the Quality of GPRS Mobility management in a Routing Area

Calculation

$$(\text{vsum}(\text{gprsMmSgsnUnsuccIntraRoutingAreaUpdReq}, \text{attIntraSgsnRaUpdate}, -1.0 * \text{succIntraSgsnRaUpdate}, 0) * 100.0) / (1.0 * \text{vsum}(\text{gprsMmSgsnIntraRoutingAreaUpdateRequests}, \text{attIntraSgsnRaUpdate}))$$

pPagingFailpSgsn

Paging Failure Rate is an indication of SGSN and downlink accessibility

Calculation

$$\text{gprsMmUnsuccessfulPagingProcedures} * 100.0 / 1.0 * \text{vsum}(\text{gprsMmSgsnSuccessfulPagingProcedures}, \text{gprsMmUnsuccessfulPagingProcedures})$$

pPdpActReFailpGGSN

The ratio between the number of Attempt PDP context activation minus completed PDP context Activation divided by Attempt PDP context Activation Received at the GGSN in percent

Calculation

$$(\text{vsum}(\text{ggsnAttemptedActivation}, -1 * \text{ggsnCompletedActivation}) * 100.0) / (1.0 * \text{ggsnAttemptedActivation})$$

pPdpContextEstabFailpGGSN

PDP context establishment failure rate has a close connection of GPRS Core network accessibility of GGSN

Calculation

$$\text{gprsSmGgsnUnsuccessfulPdpCreations} * 100.0 / \text{vsum}(\text{gprsSmGgsnSuccessfulPdpCreations}, \text{gprsSmGgsnUnsuccessfulPdpCreations})$$

pPdpContextEstabFailpSGSN

PDP context establishment failure rate has a close connection of GPRS Core network accessibility of SGSN

Calculation

```
vsum(gprsSmSgsnUnsuccessfulActivations, attActPdpContextMSPerSgsn, -1.0 *  
succActPdpContextMSPerSgsn, 0) * 100.0 / 1.0 * vsum(gprsSmSgsnSuccessfulAc-  
tivations, gprsSmSgsnUnsuccessfulActivations, attActPdpContextMSPerSgsn )
```

pPdpContextModFailpSGSN

PDP context modification failure rate has a close connection of GPRS Core network accessibility and QOS of SGSN delivered

Calculation

```
gprsSmSgsnUnsuccessfulModifications * 100.0 / vsum(gprsSmSgsnSuccessfulMod-  
ifications, gprsSmSgsnUnsuccessfulModifications, 0.0)
```

pPdpContextUpdFailpGGSN

PDP context modification failure rate has a close connection of GPRS Core network accessibility and QOS of GGSN delivered

Calculation

```
gprsSmGgsnUnsuccessfulPdpUpdatings * 100.0 / vsum(gprsSmGgsnSuccessfulPdp-  
Updatings, gprsSmGgsnUnsuccessfulPdpUpdatings, 0.0)
```

pPdpDeActReFailpGGSN

The ratio between the number of PDP attempt deactivation minus the number of PDP completed deactivate divided by PDP attempt deactivation in percent

Calculation

```
(vsum(ggsnAttemptedDeactivation, -1 * ggsnCompletedDeactivation ) * 100.0)  
/ ( 1.0 * ggsnAttemptedDeactivation)
```

pPdpSelfDeActReFailpGGSN

The ratio between the number of PDP attempt Self deactivations minus the number of PDP completed Self deactivations divided by PDP attempted Self deactivations received at the GGSN in percent

Calculation

```
(vsum(ggsnAttemptedSelfDeactivation, -1 * ggsnCompletedSelfDeactivation ) *  
100.0) / ( 1.0 * ggsnAttemptedSelfDeactivation)
```

pPdpSessionManReFailpGGSN

PDP Context Session Management Failure rate is an aggregated Key Quality indicator of the total Session Management failure statistic Received per GGSN

Calculation

```
(vsum( pPdpActReFailpGGSN, pPdpUpdReFailpGGSN, pPdpDeActReFailpGGSN, pPdp-  
SelfDeActReFailpGGSN ) * 1.0) / (4 * 1.0)
```

pPdpUpdReFailpGGSN

The ratio between the number of PDP attempt update minus the number of PDP completed update divided by PDP attempt update received at the GGSN in percent

Calculation

```
(vsum( ggsnAttemptedUpdate, -1 * ggsnCompletedUpdate ) * 100.0) / (1.0 *  
ggsnAttemptedUpdate)
```

pSessionManSuccessRateGGSN

PDP Context Session Management Failure rate is an aggregated Key Quality indicator of the total Session Management failure statistic Received per GGSN

Calculation

```
(( 1 - vsum( ggsnAttemptedActivation, ggsnAttemptedUpdate, ggsnAttemptedDe-  
activation, ggsnAttemptedSelfDeactivation, -1 * ggsnCompletedActivation, -1  
* ggsnCompletedUpdate, -1 * ggsnCompletedDeactivation, -1 * ggsnComple-  
tedSelfDeactivation ) ) * 100.0) / (vsum( ggsnAttemptedActivation, ggsnAt-  
temptedUpdate, ggsnAttemptedDeactivation, ggsnAttemptedSelfDeactivation ) *  
1.0)
```

pTotalAPNpacketSuccessRate

Total APN Packet Success Rate is the Total Average Success Factor of the overall Packets sent to and Received from all APN. Each success factor is weighted by percentage of total packets in either uplink or downlink direction.

Calculation

```
aggr(APN, pAPNpacketSuccessRate )
```

pTotalAPNSuccessRate

Total APN Success Rate shows the Total Average success factor of the Overall Operations of all APN . Each PDP Operation success is weighted by the number of the operation

Calculation

```
aggr(APN, pAPNSuccessRate )
```

SECAttIdentityReqImsiG

The counter is incremented when sending Identity Request to an MS

Calculation

attIdentityReq

SECAttReqAuthSetsSentToHlrBySGSN

Number of attempted requests for authentication sets, sent to the HLR by SGSN

Calculation

attReqAuthSetsSentToHlrBySgsn

SECemptyResponsesForAuthSetsFromHlr

Number of empty responses to the request for authentication sets that were sent to the HLR.

Calculation

emptyResponsesForAuthSetsFromHlr

SECSuccIdentityReqImsiG

Incremented at reception of an Identity Response message with the requested identity for example IMSI and IMEI from the MS.

Calculation

succIdentityReq

SECSuccReqAuthSetsSentToHlrBySGSN

Number of successful requests for authentication sets that were sent from the HLR to the SGSN.

Calculation

succReqAuthSetsHlr

SMAttActPdpContextDynG

The counter is incremented for each Activate PDP Context Request (with Empty PDP Address) received on the Gb Interface

Calculation

attActPdpContextDynMSPerSgsn

SMNbrActivePdpPerSgsnG

Number of mobile subscribers with activated PDP.

Calculation

nbrSubsWithActivePdpInSgsn

SMNbrActPdpContextG

Total number for the active PDP contexts per SGSN.

Calculation

gprsSmSgsnTotalActive

SMSuccActPdpContextDynG

Number of successfully completed PDP context activations where a dynamic PDP address is used.

Calculation

succActPdpContextDynMsPerSgsn

SMSuccActPdpContextG

Number of successfully completed PDP context activations

Calculation

succActPdpContextMSPerSgsn

SMSuccModPdpContextSgsnG

Unsuccessful PDP context modification per SGSN.

Calculation

gprsSmSgsnUnsuccessfulModifications

SuccActPdpContextDynRate

Successful dynamic PDP context activation procedures initiated by MS rate

Calculation

$$\text{SMSuccActPdpContextDynU} * 100.0 / \text{SMAttActPdpContextDynU}$$

SuccActPdpContextRate

Successful PDP context activation procedures initiated by MS rate

Calculation

$$\text{SMSuccActPdpContextU} * 100.0 / \text{SMAttActPdpContextU}$$

succDeactPdpContextGgsnPerSgsn

Retired fr 5.0.10.0.0. Replaced by SMSuccDeactPdpContextGgsnG. Number of successfully handled PDP context deactivations initiated by the GGSN

Calculation

SMSuccDeactPdpContextGgsnG

succDeactPdpContextMsPerSgsn

Retired fr 5.0.10.0.0. Replaced by SMSuccDeactPdpContextMsG. This measurement provides the number of successfully completed PDP context deactivations

Calculation

SMSuccDeactPdpContextMsG

SuccGprsAttachRate

Successful GPRS attach procedures initiated in this SGSN area

Calculation

AGGR (RA_GSN, SuccGprsAttachRate)

SuccIntraSgsnRaUpdate_Rate

Successful intra-SGSN Routing Area Update Rate procedure initiated in this SGSN area in percent. RA_GSN succIntraSgsnRaUpdate aggregate to GSN entity.

Calculation

AGGR (RA_GSN, SuccIntraSgsnRaUpdate)

TotalCapGTP_CPICallGGSN

Total capacity of the GTP-C PIC on all GGSNs

Calculation

aggr (Card, ggsnGtpcPdpCapacity)

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt()

GSN Peg Counts

The following is a list of peg counts for the GSN entity.

attActPdpContextDynMSPerSgsn

The counter is incremented for each Activate PDP Context Request (with Empty PDP Address) received on the Gb Interface

Data Source

SGSN

Source Field

attActPdpContextDynMSPerSgsn

Source Section

GPRS Session Management

attAuthInSgsn

The counter is incremented when sending Authentication and Ciphering Request to an MS

Data Source

SGSN

Source Field

attAuthInSgsn

Source Section

Security

attCombiAttach

The counter is incremented for each Attach Request indicating Combined GPRS/IMSI Attach received on the Gb Interface

Data Source

SGSN

Source Field

attCombiAttach

Source Section

GPRS Mobility Management

attCombiDetachMs

The counter is incremented for each Detach Request indicating Combined GPRS/IMSI Detach received on the Gb Interface

Data Source

SGSN

Source Field

attCombiDetachMs

Source Section

GPRS Mobility Management

attGprsAttach

The counter is incremented for each Attach Request indicating GPRS Only Attach received on the Gb Interface

Data Source

SGSN

Source Field

attGprsAttach

Source Section

GPRS Mobility Management

attGprsAttachUmts

The number of attempted GPRS attach procedures initiated within this SGSN area. Resending from MSs are also counted.

Data Source

SGSN

Source Field

attGprsAttachUmts

Source Section

Mobility Management

attGprsAttachVisitor

This measurement provides the number of attempted GPRS attach procedures, within this SGSN area, initiated by visiting GPRS subscribers . Visiting subscribers are defined by the roaming status parameter in the IMSI number series configuration. Resendings from MSs are not counted.

Data Source

SGSN

Source Field

attGprsAttachVisitor

Source Section

Mobility Management

attGprsDetachMs

The counter is incremented for each Detach Request indicating GPRS Detach received on the Gb Interface

Data Source

SGSN

Source Field

attGprsDetachMs

Source Section

GPRS Mobility Management

attGprsDetachMsUmts

The number of attempted GPRS detach procedures.

Data Source

SGSN

Source Field

attGprsDetachMsUmts

Source Section

Mobility Management

attGprsDetachSgsn

The counter is incremented when sending Detach Request to an MS

Data Source

SGSN

Source Field

attGprsDetachSgsn

Source Section

GPRS Mobility Management

attGprsDetachSgsnUmts

The number of attempted GPRS detach procedures initiated by the SGSN.

Data Source

SGSN

Source Field

attGprsDetachSgsnUmts

Source Section

Mobility Management

attIdentityReq

The counter is incremented when sending Identity Request to an MS

Data Source

SGSN

Source Field

attIdentityReq

Source Section

Security

attImsiAttach

The counter is incremented for each Attach Request indicating GPRS Attach while IMSI Attached received on the Gb Interface

Data Source

SGSN

Source Field

attImsiAttach

Source Section

GPRS Mobility Management

attImsiDetachMS

The counter is incremented for each Detach Request indicating IMSI Detach received on the Gb Interface

Data Source

SGSN

Source Field

attImsiDetachMS

Source Section

GPRS Mobility Management

attInterSgsnRaUpdate

The counter is incremented for each RA Update Request (where old RA is served by a cooperating SGSN) received on the Gb Interface

Data Source

SGSN

Source Field

attInterSgsnRaUpdate

Source Section

GPRS Mobility Management

attInterSgsnRaUpdateUmts

The number of attempted inter-SGSN RA update procedures.

Data Source

SGSN

Source Field

attInterSgsnRaUpdateUmts

Source Section

Mobility Management

attInterSgsnRaUpdateVisitor

This measurement provides the number of attempted inter-SGSN RAU procedures initiated by visiting GPRS subscribers within this SGSN, where the old RA is served by another SGSN. Visiting subscribers are defined by the roaming status parameter in the IMSI number series configuration. Resendings from MSs are not counted.

Data Source

SGSN

Source Field

attInterSgsnRaUpdateVisitor

Source Section

Mobility Management

attIntraSgsnRaUpdate

The counter is incremented for each RA Update Request (where old and new RA are served by this SGSN) received on the Gb Interface

Data Source

SGSN

Source Field

attIntraSgsnRaUpdate

Source Section

GPRS Mobility Management

attIntraSgsnRaUpdateUmts

The number of attempted intra-SGSN RA update procedures.

Data Source

SGSN

Source Field

attIntraSgsnRaUpdateUmts

Source Section

Mobility Management

attPacketSwitchingPaging

Number of attempted packet switched paging procedures, for GPRS services, within this SGSN area

Data Source

SGSN

Source Field

attPacketSwitchingPaging

Source Section

Radio Resource Management

attPacketSwitchingPagingUmts

The number of attempted PS paging procedures.

Data Source

SGSN

Source Field

attPacketSwitchingPagingUmts

Source Section

Mobility Management

attReqAuthSetsSentToHlrBySgsn

Number of attempted requests for authentication sets, sent to the HLR by SGSN

Data Source

SGSN

Source Field

attReqAuthSetsSentToHlrBySgsn

Source Section

Security

bssgpAttResumeProc

The number of attempted BSS GPRS Protocol (BSSGP) resume procedures.

Data Source

SGSN

Source Field

bssgpAttResumeProc

Source Section

BSSGP

bssgpAttSuspendProc

The total number of downlink BSSGP suspend procedures

Data Source

SGSN

Source Field

bssgpAttSuspendProc

Source Section

BSSGP

CAMAttCamelDialogues

The total number of CAMEL dialogue attempts in GPRS.

Data Source

SGSN

Source Field

CAM.AttCamelDialogues.G

Source Section

CAMEL

CAMAttCamelDialoguesU

The total number of CAMEL dialogue attempts in UMTS.

Data Source

SGSN

Source Field

CAM.AttCamelDialogues.U

Source Section

CAMEL

CAMFailDialoguesScf

The number of failed CAMEL dialogues in GPRS, error or reject from gsm SCF. The CAM.FailDialoguesScf counter is split into G and W counters.

Data Source

SGSN

Source Field

CAM.FailDialoguesScf.G

Source Section

CAMEL

CAMFailDialoguesScfU

The number of failed CAMEL dialogues, error or reject from gsm SCF. The CAM.FailDialoguesScf counter is split into G and W counters.

Data Source

SGSN

Source Field

CAM.FailDialoguesScf.U

Source Section

CAMEL

CAMFailDialoguesSsf

The number of failed CAMEL dialogues in GPRS, aborted locally by gprsSSF. The CAM.FailDialoguesSsf counter is split into G and W counters.

Data Source

SGSN

Source Field

CAM.FailDialoguesSsf.G

Source Section

CAMEL

CAMFailDialoguesSsfU

The number of failed CAMEL dialogues, aborted locally by gprsSSF. The CAM.FailDialoguesSsf counter is split into G and W counters.

Data Source

SGSN

Source Field

CAM.FailDialoguesSsf.U

Source Section

CAMEL

collectionPeriod

Period length of collection in seconds

Data Source

SGSN

collectionPeriod_GGSN

Period Length

Data Source

SGSN

Source Field

collectionPeriod_GGSN

Source Section

GGSN General

collectionPeriod_SNMP_GGSN

Period Length

Data Source

GGSN

Source Field

collectionPeriod_SNMP_GGSN

Source Section

GGSN General

discardedAttachMsError

The discardedAttachMsError counter is incremented when there is a rejected attach because the MS has wrong Temporary Logical Link Identity (TLLI). There is an IMSI attach on non-random TLLI.

Data Source

SGSN

Source Field

discardedAttachMsError

Source Section

Mobility Management

discardedCombiAttach

The number of discarded combined GPRS/IMSI attach requests on the DP level due to overload protection or incorrect information elements.

Data Source

SGSN

Source Field

discardedCombiAttach

Source Section

Mobility Management

discardedCombiRaUpdate

The number of discarded combined GPRS/IMSI RA update requests on the DP level due to overload protection or incorrect information elements.

Data Source

SGSN

Source Field

discardedCombiRaUpdate

Source Section

Mobility Management

discardedDetach

The number of discarded detach requests on the DP level due to overload protection or incorrect information elements.

Data Source

SGSN

Source Field

discardedDetach

Source Section

Mobility Management

discardedGprsAttach

The number of discarded GPRS attach requests on the Device Processor (DP) level due to overload protection or incorrect information elements.

Data Source

SGSN

Source Field

discardedGprsAttach

Source Section

Mobility Management

discardedPayloadPacket

The number of discarded payload packets on the DP level due to overload or incorrect information elements.

Data Source

SGSN

Source Field

discardedPayloadPacket

Source Section

Session Management

discardedRaUpdate

The number of discarded RA update requests on the DP level due to overload protection or incorrect information elements.

Data Source

SGSN

Source Field

discardedRaUpdate

Source Section

Mobility Management

DiscardedSccpConnectInd

The counter is incremented when a SCCP Connect Indication message is discarded

Data Source

SGSN

discardedSessionMgmnt

The number of discarded session management messages on the DP level due to overload or incorrect information elements.

Data Source

SGSN

Source Field

discardedSessionMgmnt

Source Section

Session Management

downlinkSndcpNpduSent

The number of outgoing N-PDUs sent by the SMDCP protocol layer.

Data Source

SGSN

Source Field

downlinkSndcpNpduSent

Source Section

SMDCP

downlinkSndcpOctetSent

The number of octets in outgoing N-PDUs sent by the SMDCP protocol layer (kOctets, 1024 octets)

Data Source

SGSN

Source Field

downlinkSndcpOctetSent

Source Section

SND CP

emptyResponsesForAuthSetsFromHlr

Number of empty responses to the request for authentication sets that were sent to the HLR.

Data Source

SGSN

Source Field

emptyResponsesForAuthSetsFromHlr

Source Section

Security

errLlcFramesDetectedBySgsn

The number of erroneously received LLC frames in case of error detection in the SGSN.

Data Source

SGSN

Source Field

errLlcFramesDetectedBySgsn

Source Section

LLC

ggsn_auth_failed

Results Authentication failed Collected using CLI

Data Source

SGSN

Source Field

ResultsAuthenticationfailed

Source Section

ggsnstatisticsgtp

ggsn_ctrl_pkt_drops

Control packets dropped Collected using CLI

Data Source

SGSN

Source Field

GTPstatisticsControlpacketsdropped

Source Section

ggsnstatisticsgtp

ggsn_da_unavail

Results Dynamic addresses unavailable Collected using CLI

Data Source

SGSN

Source Field

ResultsDynamicaddressesunavailable

Source Section

ggsnstatisticsgtp

ggsn_Dlink_Bytes

Downlink traffic Packets Collected using CLI

Data Source

SGSN

Source Field

DownlinktrafficBytes

Source Section

ggsnstatistics

ggsn_Dlink_Drops

Downlink traffic Bytes Collected using CLI

Data Source

SGSN

Source Field

DownlinktrafficDroppedpackets

Source Section

ggsnstatistics

ggsn_Dlink_Packets

Downlink traffic Dropped Packets Collected using CLI

Data Source

SGSN

Source Field

DownlinktrafficPackets

Source Section

ggsnstatistics

ggsn_err_ind_rcvd

Results Error indications received Collected using CLI

Data Source

SGSN

Source Field

ResultsErrorindicationsreceived

Source Section

ggsnstatisticsgtp

ggsn_err_ind_trans

Results Error indications transmitted Collected using CLI

Data Source

SGSN

Source Field

ResultsErrorindicationstransmitted

Source Section

ggsnstatisticsgtp

ggsn_invalid_req_format

Results Invalid request format Collected using CLI

Data Source

SGSN

Source Field

ResultsInvalidrequestformat

Source Section

ggsnstatisticsgtp

ggsn_mem_unavail

Results No memory available Collected using CLI

Data Source

SGSN

Source Field

ResultsNomemoryavailable

Source Section

ggsnstatisticsgtp

ggsn_mndt_ie_invalid

Results Mandatory IE invalid Collected using CLI

Data Source

SGSN

Source Field

ResultsMandatoryIEinvalid

Source Section

ggsnstatisticsgtp

ggsn_mndt_ie_missing

Results Mandatory IE missing Collected using CLI

Data Source

SGSN

Source Field

ResultsMandatoryIEmissing

Source Section

ggsnstatisticsgtp

ggsn_opt_ie_invalid

Results Optional IE invalid Collected using CLI

Data Source

SGSN

Source Field

ResultsOptionalIEinvalid

Source Section

ggsnstatisticsgtp

ggsn_pdp_cr_resp_trans

Number of (GTP Message) PDP Create Responses transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsGGSNPDPcreatorresponsestransmitted

Source Section

ggsnstatisticsgtp

ggsn_pdp_creation_failed

PDP creations Failed Collected using CLI

Data Source

SGSN

Source Field

Failedcreations

Source Section

ggsnstatistics

ggsn_pdp_deact_failed

PDP deactivations Failed Collected using CLI

Data Source

SGSN

Source Field

Faileddeactivations

Source Section

ggsnstatistics

ggsn_pdp_del_idle_sv

PDP deletions by idle-supervision Collected using CLI

Data Source

SGSN

Source Field

PDPdeletionsbyidle-supervision

Source Section

ggsnstatistics

ggsn_pdp_del_req_trans

Number of (GTP Message) PDP Delete Requests transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsGGSNPDPdeleterequststransmitted

Source Section

ggsnstatisticsgtp

ggsn_pdp_del_res_recvd

PDP Contexts: PDP delete responses received Collected using CLI

Data Source

SGSN

Source Field

PDPContextsPDPdeleterespnsesreceived

Source Section

ggsnstatisticsgtp

ggsn_pdp_del_res_trans

PDP Contexts: PDP delete responses transmitted Collected using CLI

Data Source

SGSN

Source Field

PDPContextsPDPdeleteresponestransmitted

Source Section

ggsnstatisticsgtp

ggsn_pdp_del_user_cmd

PDP deletions by user command Collected using CLI

Data Source

SGSN

Source Field

PDPdeletionsbyusercommand

Source Section

ggsnstatistics

ggsn_pdp_upd_req_rcvd

Number of (GTP Message) PDP Update Requests received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsPDPupdaterequestsreceived

Source Section

ggsnstatisticsgtp

ggsn_pdp_upd_req_trans

Number of (GTP Message) PDP Update Requests transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsPDPupdaterequeststransmitted

Source Section

ggsnstatisticsgtp

ggsn_pdp_upd_res_recvd

Number of (GTP Message) PDP Update Responses received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsPDPupdateresponsesreceived

Source Section

ggsnstatisticsgtp

ggsn_pdp_upd_res_trans

Number of (GTP Message) PDP Update Responses transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsPDPupdateresponsestransmitted

Source Section

ggsnstatisticsgtp

ggsn_pdp_update_failed

PDP updates Failed Collected using CLI

Data Source

SGSN

Source Field

Failedupdates

Source Section

ggsnstatistics

ggsn_Pkt_filter_semantic_err

Results Packet filtering semantic error Collected using CLI

Data Source

SGSN

Source Field

ResultsPacketfilteringsemanticerror

Source Section

ggsnstatisticsgtp

ggsn_Pkt_filter_syntax_err

Results Packet filtering syntax error Collected using CLI

Data Source

SGSN

Source Field

ResultsPacketfilteringsyntaxerror

Source Section

ggsnstatisticsgtp

ggsn_ref_notexist

Results Reference does not exist Collected using CLI

Data Source

SGSN

Source Field

ResultsReferencedoesnotexist

Source Section

ggsnstatisticsgtp

ggsn_req_accpt

Results Request accepted Collected using CLI

Data Source

SGSN

Source Field

ResultsRequestaccepted

Source Section

ggsnstatisticsgtp

ggsn_req_received

Number of (GTP Message) Echo Requests received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesEchorequestsreceived

Source Section

ggsnstatisticsgtp

ggsn_req_transmitted

Number of (GTP Message) Echo Requests transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesEchorequestsTransmitted

Source Section

ggsnstatisticsgtp

ggsn_res_not_avail

Results Resources not available Collected using CLI

Data Source

SGSN

Source Field

ResultsResourcesnotavailable

Source Section

ggsnstatisticsgtp

ggsn_res_received

Number of (GTP Message) Echo Responses received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesEchoresponsesreceived

Source Section

ggsnstatisticsgtp

ggsn_res_transmitted

Number of (GTP Message) Echo Responses transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesEchoresponsesTransmitted

Source Section

ggsnstatisticsgtp

ggsn_serv_unsupported

Results Service is unsupported Collected using CLI

Data Source

SGSN

Source Field

ResultsServiceisunsupported

Source Section

ggsnstatisticsgtp

ggsn_sgsn_pdp_cr_req_recvd

Number of (GTP Message) PDP Create Requests received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsSGSNPDPcreaterequestsreceived

Source Section

ggsnstatisticsgtp

ggsn_sgsn_pdp_del_req_recvd

Number of (GTP Message) PDP Delete Requests received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPContextsSGSNPDPdeleterequestsreceived

Source Section

ggsnstatisticsgtp

ggsn_sys_failed

Results System failure Collected using CLI

Data Source

SGSN

Source Field

ResultsSystemfailure

Source Section

ggsnstatisticsgtp

ggsn_tft_semantic_err

Results TFT semantic error Collected using CLI

Data Source

SGSN

Source Field

ResultsTFTsemanticerror

Source Section

ggsnstatisticsgtp

ggsn_tft_syntax_err

Results TFT syntax error Collected using CLI

Data Source

SGSN

Source Field

ResultsTFTsyntaxerror

Source Section

ggsnstatisticsgtp

ggsn_unkwn_apn

Results Unknown APN Collected using CLI

Data Source

SGSN

Source Field

ResultsUnknownAPN

Source Section

ggsnstatisticsgtp

ggsn_unkwn_pdp_add_or_type

Results Unknown PDP address or type Collected using CLI

Data Source

SGSN

Source Field

ResultsUnknownPDPaddressortype

Source Section

ggsnstatisticsgtp

ggsn_Uplink_Bytes

Uplink traffic Packets Collected using CLI

Data Source

SGSN

Source Field

UplinktrafficBytes

Source Section

ggsnstatistics

ggsn_Uplink_Drops

Uplink traffic Dropped Bytes Collected Using CLI

Data Source

SGSN

Source Field

UplinktrafficDroppedpackets

Source Section

ggsnstatistics

ggsn_Uplink_Packets

Uplink traffic Dropped packets Collected using CLI

Data Source

SGSN

Source Field

UplinktrafficPackets

Source Section

ggsnstatistics

ggsn_ver_unsupp_received

Number of (GTP Message) Version not supported received in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesVersionunsupportedpacketsreceived

Source Section

ggsnstatisticsgtp

ggsn_ver_unsupp_transmitted

Number of (GTP Message) Version not supported transmitted from the GGSN Collected using CLI.

Data Source

SGSN

Source Field

MessagesVersionunsupportedpacketsTransmitted

Source Section

ggsnstatisticsgtp

ggsn_ver_unsupported

Results Version unsupported Collected using CLI

Data Source

SGSN

Source Field

ResultsVersionunsupported

Source Section

ggsnstatisticsgtp

ggsnAlarmCriticalNumber

Total number of critical alarms

Data Source

GGSN

Source Field

ggsnAlarmCriticalNumber

Source Section

ggsnAlarmInfo

ggsnAlarmMajorNumber

Total number of major alarms

Data Source

GGSN

Source Field

ggsnAlarmMajorNumber

Source Section

ggsnAlarmInfo

ggsnAlarmMinorNumber

Total number of minor alarms.

Data Source

GGSN

Source Field

ggsnAlarmMinorNumber

Source Section

ggsnAlarmInfo

ggsnAlarmNumber

Total number of active alarms, i.e. total number of entries in the alarm table

Data Source

GGSN

Source Field

ggsnAlarmNumber

Source Section

ggsnAlarmInfo

ggsnAlarmUnknownNumber

Total number of unknown alarms.

Data Source

GGSN

Source Field

ggsnAlarmUnknownNumber

Source Section

ggsnAlarmInfo

ggsnAlarmWarningNumber

Total number of warnings.

Data Source

GGSN

Source Field

ggsnAlarmWarningNumber

Source Section

ggsnAlarmInfo

ggsnAttemptedActivation

The number of PDP context activation procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnAttemptedActivation

Source Section

ggsnPdpContextsStatsAttempted

ggsnAttemptedActivationIpv6

The number of IPv6 PDP context activation procedures initiated by MS on this GGSN.

Data Source

GGSN

Source Field

ggsnAttemptedActivationIpv6

ggsnAttemptedDeactivation

Total number of attempted PDP context deactivation procedures served by this GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPdeactivations

Source Section

ggsnstatistics

ggsnAttemptedDeactivation_jn

The number of PDP context deactivation procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnAttemptedDeactivation

Source Section

ggsnPdpContextsStatsAttempted

ggsnAttemptedSecondaryActivation

The number of secondary PDP context activation procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnAttemptedSecondaryActivation

ggsnAttemptedSelfDeactivation

The number of PDP context deactivation procedures initiated by this GGSN

Data Source

GGSN

Source Field

ggsnAttemptedSelfDeactivation

Source Section

ggsnPdpContextsStatsAttempted

ggsnAttemptedTimeDeactivation

Total number of a attempted PDP context deactivation procedures served by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAttemptedTimeDeactivation

Source Section

ggsnPdpContextsStatsAttempted

ggsnAttemptedUpdate

Total number of attempted PDP context update procedures served by this GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPupdates

Source Section

ggsnstatistics

ggsnAttemptedUpdate_jn

The number of PDP context updates attempted on this GGSN.

Data Source

GGSN

Source Field

ggsnAttemptedUpdate

Source Section

ggsnPdpContextsStatsAttempted

ggsnAttmptManualDeactivation

The number of successfully completed deactivation PDP context procedures initiated by the MS on this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnAttmptManualDeactivation

Source Section

ggsnPdpContextsStatsAttempted

ggsnCompletedActivation

The number of successfully completed activation PDP context procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnCompletedActivation

Source Section

ggsnPdpContextsStatsCompleted

ggsnCompletedActivationIpv6

The number of successfully completed IPv6 activation PDP contexts procedures initiated by MS on this GGSN

Data Source

GGSN

Source Field

ggsnCompletedActivationIpv6

ggsnCompletedDeactivation

The number of successfully completed deactivation PDP context procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnCompletedDeactivation

Source Section

ggsnPdpContextsStatsCompleted

ggsnCompletedManualDeactivation

The number of PDP context updates successfully completed on this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnCmpltdManualDeactivation

Source Section

ggsnPdpContextsStatsCompleted

ggsnCompletedSecondaryActivation

The number of successfully completed activation secondary PDP context procedures initiated by the MS on this GGSN.

Data Source

GGSN

Source Field

ggsnCompletedSecondaryActivation

ggsnCompletedSelfDeactivation

The number of successfully completed deactivation PDP context procedures initiated by this GGSN.

Data Source

GGSN

Source Field

ggsnCompletedSelfDeactivation

Source Section

ggsnPdpContextsStatsCompleted

ggsnCompletedTimeDeactivation

The number of successfully completed deactivation PDP context procedures initiated by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnCompletedTimeDeactivation

Source Section

ggsnPdpContextsStatsCompleted

ggsnCompletedUpdate

The number of PDP context updates successfully completed on this GGSN.

Data Source

GGSN

Source Field

ggsnCompletedUpdate

Source Section

ggsnPdpContextsStatsCompleted

ggsnControlLoad

Weighted PDP context load in control.

Data Source

GGSN

Source Field

ggsnControlLoad

ggsnDownlinkBytesIpv6

The bytes for all processed IPv6 packets in the downlink direction via this GGSN

Data Source

GGSN

Source Field

ggsnDownlinkBytesIpv6

ggsnDownlinkDropsBytes

The total number of downlink bytes dropped by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnDownlinkDropsBytes

Source Section

ggsnDownlinkTrafficInfo

ggsnDownlinkDropsIpv6

The number of dropped IPv6 packets by this GGSN in the downlink direction

Data Source

GGSN

Source Field

ggsnDownlinkDropsIpv6

ggsnDownlinkPacketsIpv6

Total IPv6 downlink packets processed by this GGSN.

Data Source

GGSN

Source Field

ggsnDownlinkPacketsIpv6

ggsnFailedActivation

The number of PDP context updates successfully completed on this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnFailedActivation

Source Section

ggsnPdpContextsStatsFailed

ggsnGtpControlPacketDrops

Control packets dropped (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpControlPacketDrops

Source Section

ggsnGtp

ggsnGtpDownlinkBytes

Number of Downlink GTP-U bytes sent in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

GTPstatisticsDownlinkBytes

Source Section

ggsnstatisticsgtp

ggsnGtpDownlinkBytes_jn

Number of Downlink GTP-U bytes sent in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpDownlinkBytes

Source Section

ggsnGtp

ggsnGtpDownlinkPackets

Number of Downlink GTP-U packets sent in the GGSN Collected using CLI.

Data Source

SGSN

Source Field

GTPstatisticsDownlinkpackets

Source Section

ggsnstatisticsgtp

ggsnGtpDownlinkPackets_jn

Number of Downlink GTP-U packets sent in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpDownlinkPackets

Source Section

ggsnGtp

ggsnGtpEchoReqReceived

Number of (GTP Message) Echo Requests received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpEchoReqReceived

Source Section

ggsnGtp

ggsnGtpEchoReqSent

Number of (GTP Message) Echo Requests transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpEchoReqSent

Source Section

ggsnGtp

ggsnGtpEchoRespReceived

Number of (GTP Message) Echo Responses received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpEchoRespReceived

Source Section

ggsnGtp

ggsnGtpEchoRespSent

Number of (GTP Message) Echo Responses transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpEchoRespSent

Source Section

ggsnGtp

ggsnGtpErrInvalidReqFormatDel

The number of GTP Invalid delete request format errors sent by the GGSN

Data Source

GGSN

ggsnGtpErrInvalidReqFormatUpd

The number of GTP Invalid update request format errors sent by the GGSN

Data Source

GGSN

ggsnGtpErrMndtryIEInvalidDel

The number of errors sent by the GGSN indicating that a mandatory information element was invalid in delete request

Data Source

GGSN

ggsnGtpErrMndtryIEInvalidUpd

The number of errors sent by the GGSN indicating that a mandatory information element was invalid in update request

Data Source

GGSN

ggsnGtpErrMndtryIEMissingDel

The number of errors sent by the GGSN indicating that a mandatory information element was missing in delete request

Data Source

GGSN

ggsnGtpErrMndtryIEMissingUpd

The number of errors sent by the GGSN indicating that a mandatory information element was missing in update request.

Data Source

GGSN

ggsnGtpErrOptionalIEInvDel

The number of errors sent by this GGSN indicating that an optional information element was invalid in delete request

Data Source

GGSN

ggsnGtpErrOptionalIEInvUpd

The number of errors sent by the GGSN indicating that an optional information element was invalid in update request

Data Source

GGSN

ggsnGtpErrorApnAccessDenied

The number of GTP APN access denied errors with no subscription

Data Source

GGSN

Source Field

ggsnGtpErrorApnAccessDenied

ggsnGtpErrorApnUnknown

Results Unknown APN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorApnUnknown

Source Section

ggsnGtpErrorStats

ggsnGtpErrorAuthenticationFailed

Results Authentication failed (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrAuthenFailed

Source Section

ggsnGtpErrorStats

ggsnGtpErrorDynAddrUnavailable

Results Dynamic addresses unavailable (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrDynAddrUnavailable

Source Section

ggsnGtpErrorStats

ggsnGtpErrorIndicationReceived

Results Error indications received (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrIndicationReceived

Source Section

ggsnGtpErrorStats

ggsnGtpErrorIndicationSent

Results Error indications transmitted (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorIndicationSent

Source Section

ggsnGtpErrorStats

ggsnGtpErrorInvalidRequestFormat

Results Invalid request format (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrInvalidRqstFormat

Source Section

ggsnGtpErrorStats

ggsnGtpErrorMandatoryIEInvalid

Results Mandatory IE invalid (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrMandatoryIEInvalid

Source Section

ggsnGtpErrorStats

ggsnGtpErrorMandatoryIEMissing

Results Mandatory IE missing (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrMandatoryIEMissing

Source Section

ggsnGtpErrorStats

ggsnGtpErrorMemoryUnAvailable

Results No memory available (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorMemoryUnAvailable

Source Section

ggsnGtpErrorStats

ggsnGtpErrorOptionalIEInvalid

Results Optional IE invalid (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrOptionalIEInvalid

Source Section

ggsnGtpErrorStats

ggsnGtpErrorPackFiltSemantError

Results Packet filtering semantic error (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrPackFiltSemantError

Source Section

ggsnGtpErrorStats

ggsnGtpErrorPackFiltSyntaxError

Results Packet filtering syntax error (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrPackFiltSyntaxError

Source Section

ggsnGtpErrorStats

ggsnGtpErrorPDPAddrUnknown

Results Unknown PDP address or type (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorPDPAddrUnknown

Source Section

ggsnGtpErrorStats

ggsnGtpErrorPdpWithoutTft

The number of PDP context without TFT already activated.

Data Source

GGSN

Source Field

ggsnGtpErrorPdpWithoutTft

ggsnGtpErrorReferenceInexistent

Results Reference does not exist (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrReferenceInexistent

Source Section

ggsnGtpErrorStats

ggsnGtpErrorResourceUnavailable

Results Resources not available (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrResourceUnavailable

Source Section

ggsnGtpErrorStats

ggsnGtpErrorServiceUnsupported

Results Service is unsupported (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrServiceUnsupported

Source Section

ggsnGtpErrorStats

ggsnGtpErrorSystemFailure

Results System failure (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorSystemFailure

Source Section

ggsnGtpErrorStats

ggsnGtpErrorSystemFailureUpd

The number of GTP system update failure errors sent by the GGSN

Data Source

GGSN

Source Field

ggsnGtpErrorSystemFailureUpd

ggsnGtpErrorTFTSemanticError

Results TFT semantic error (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorTFTSemanticError

Source Section

ggsnGtpErrorStats

ggsnGtpErrorTFTSyntaxError

Results TFT syntax error (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpErrorTFTSyntaxError

Source Section

ggsnGtpErrorStats

ggsnGtpErrorTFTSyntaxErrorUpd

The number of GTP TFT update syntax errors sent by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpErrorTFTSyntaxErrorUpd

ggsnGtpErrPackFiltSemantErUpd

The number of semantic update packet filter errors sent by the GGSN

Data Source

GGSN

ggsnGtpErrPackFiltSyntaxErUpd

The number of packet filter update syntax errors sent by the GGSN

Data Source

GGSN

ggsnGtpErrReferInexistentDel

The number of reference delete inexistent errors sent by this GGSN

Data Source

GGSN

ggsnGtpErrRefInexistentUpd

The number of reference update inexistent errors sent by this GGSN.

Data Source

GGSN

ggsnGtpErrTFTSemanticErrorUpd

The number of GTP TFT update semantic errors sent by the GGSN.

Data Source

GGSN

ggsnGtpNbrofCreatedTunnels

The total number of GTP tunnels that have been created by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpNbrofCreatedTunnels

ggsnGtpNbrOfTunnels

The number of active GTP tunnels on the GGSN.

Data Source

GGSN

Source Field

ggsnGtpNbrOfTunnels

ggsnGtpPdpCreateReqReceived

Number of (GTP Message) PDP Create Requests received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpCreateReqReceived

Source Section

ggsnGtp

ggsnGtpPdpCreateRespSent

Number of (GTP Message) PDP Create Responses transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpCreateRespSent

Source Section

ggsnGtp

ggsnGtpPdpDeleteReqReceived

Number of (GTP Message) PDP Delete Requests received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpDeleteReqReceived

Source Section

ggsnGtp

ggsnGtpPdpDeleteReqSent

Number of (GTP Message) PDP Delete Requests transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpDeleteReqSent

Source Section

ggsnGtp

ggsnGtpPdpDeleteRespReceived

PDP Contexts: PDP delete responses received (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpDeleteRespReceived

Source Section

ggsnGtp

ggsnGtpPdpDeleteRespSent

PDP Contexts: PDP delete responses transmitted (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpDeleteRespSent

Source Section

ggsnGtp

ggsnGtpPdpUpdateReqReceived

Number of (GTP Message) PDP Update Requests received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpUpdateReqReceived

Source Section

ggsnGtp

ggsnGtpPdpUpdateReqSent

Number of (GTP Message) PDP Update Requests transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpUpdateReqSent

Source Section

ggsnGtp

ggsnGtpPdpUpdateRespReceived

Number of (GTP Message) PDP Update Responses received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpUpdateRespReceived

Source Section

ggsnGtp

ggsnGtpPdpUpdateRespSent

Number of (GTP Message) PDP Update Responses transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPdpUpdateRespSent

Source Section

ggsnGtp

ggsnGtpPrAlreadyFulfilled

The number of GTP Prime data record transfer response Request Already Fulfilled received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrAlreadyFulfilled

ggsnGtpPrDataRecTransferReceived

Number of (GTP Message) Data Record Transfer Responses received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrDataRecTransferRcvd

Source Section

ggsnGtpprime

ggsnGtpPrDataRecTransferSent

Number of (GTP Message) Data Record Transfer Requests sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrDataRecTransferSent

Source Section

ggsnGtpprime

ggsnGtpPrDecodingError

The number of GTP Prime data record transfer response encoding Error received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrDecodingError

ggsnGtpPrDupPacketFulfilled

The number of GTP Prime data record transfer response Request Duplicate Packet Fulfilled received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrDupPacketFulfilled

ggsnGtpPrEchoReqReceived

The number of GTP Prime Echo Requests received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrEchoReqReceived

Source Section

ggsnGtpprime

ggsnGtpPrEchoRequestsSent

The number of GTP Prime Echo Requests sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrEchoRequestsSent

Source Section

ggsnGtpprime

ggsnGtpPrEchoRespReceived

The number of GTP Prime Echo Responses received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrEchoRespReceived

Source Section

ggsnGtpprime

ggsnGtpPrEchoRespSent

The number of GTP Prime Echo Responses sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrEchoRespSent

Source Section

ggsnGtpprime

ggsnGtpPrErrorMandatoryIEInvalid

The number of GTP Prime Mandatory Information Element Invalid errors received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrErrMndtryIEInvalid

Source Section

ggsnGtpprime

ggsnGtpPrErrorMandatoryIEMissing

The number of GTP Prime mandatory Information Element Missing errors received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrErrMndtryIEMissing

Source Section

ggsnGtpprime

ggsnGtpPrErrorOptionalIEInvalid

The number of GTP Prime Optional Information Element Invalid errors received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrErrOptionalIEInvalid

Source Section

ggsnGtpprime

ggsnGtpPrErrorRefInexistent

The number of GTP Prime Reference Inexistent errors received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrErrorRefInexistent

Source Section

ggsnGtpprime

ggsnGtpPrimeDataRecTransfReqTransm

Number of (GTP Prime) Data record transfer requests transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesDatarecordtransferrequeststransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeDataRecTransfResRcvd

Number of (GTP Prime) Data record transfer responses received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesDatarecordtransferresponsesreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeEchoReqRcvd

Number of (GTP Prime) Echo requests received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesEchorequestsreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeEchoReqTransm

Number of (GTP Prime) Echo requests transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesEchorequestsTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeEchoResRcvd

Number of (GTP Prime) Echo responses received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesEchoresponsesreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeEchoResTransm

Number of (GTP Prime) Echo responses transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesEchoresponsesTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeMndtIE_invalid

Number of (GTP Prime) Mandatory IE invalid on the GGSN Collected using CLI

Data Source

SGSN

Source Field

ResultsMandatoryIEinvalid

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeMndtIE_missing

Number of (GTP Prime) Mandatory IE missing on the GGSN Collected using CLI

Data Source

SGSN

Source Field

ResultsMandatoryIEmissing

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeNodeAliveReqRcvd

Number of (GTP Prime) Node alive requests received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesNodealiverequestsreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeNodeAliveReqTransm

Number of (GTP Prime) Node alive requests transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesNodealiverequestsTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeNodeAliveResRcvd

Number of (GTP Prime) Node alive responses received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesNodealiveresponsesreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeNodeAliveResTransm

Number of (GTP Prime) Node alive responses transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesNodealiveresponsesTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeOptIE_invalid

Number of (GTP Prime) Optional IE invalid on the GGSN Collected using CLI

Data Source

SGSN

Source Field

ResultsOptionalIEinvalid

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeRedReqRcvd

Number of (GTP Prime) Redirection requests received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesRedirectionrequestsreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeRedReqTransm

Number of (GTP Prime) Redirection requests transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesRedirectionrequestsTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeRedResRcvd

Number of (GTP Prime) Redirection responses received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesRedirectionresponsesreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeRedResTransm

Number of (GTP Prime) Redirection responses transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesRedirectionresponsesTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeVerUnsupPktRcvd

Number of (GTP Prime) Version unsupported packets received on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesVersionunsupportedpacketsreceived

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrimeVerUnsupPktTransm

Number of (GTP Prime) Version unsupported packets transmitted on the GGSN Collected using CLI

Data Source

SGSN

Source Field

MessagesVersionunsupportedpacketsTransmitted

Source Section

ggsnstatisticsgtpprime

ggsnGtpPrInvalidMessageFormat

The number of GTP Prime data record transfer response Invalid Message Format received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrInvalidMessageFormat

ggsnGtpPrNodeAliveReqReceived

Number of (GTP Message) Node Alive Requests received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrNodeAliveReqReceived

Source Section

ggsnGtpprime

ggsnGtpPrNodeAliveReqSent

Number of (GTP Message) Node Alive Requests sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrNodeAliveReqSent

Source Section

ggsnGtpprime

ggsnGtpPrNodeAliveRespReceived

Number of (GTP Message) Node Alive Responses received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrNodeAliveRespRcvd

Source Section

ggsnGtpprime

ggsnGtpPrNodeAliveRespSent

Number of (GTP Message) Node Alive Responses sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrNodeAliveRespSent

Source Section

ggsnGtpprime

ggsnGtpPrNoResource

The number of GTP Prime data record transfer response No Resource received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrNoResource

ggsnGtpPrRedirectReqReceived

Number of (GTP Message) Redirection Requests received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrRedirectReqReceived

Source Section

ggsnGtpprime

ggsnGtpPrRedirectReqSent

Number of (GTP Message) Redirection Requests sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrRedirectReqSent

Source Section

ggsnGtpprime

ggsnGtpPrRedirectRespReceived

Number of (GTP Message) Redirection Responses received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrRedirectRespReceived

Source Section

ggsnGtpprime

ggsnGtpPrRedirectRespSent

Number of (GTP Message) Redirection Responses sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrRedirectRespSent

Source Section

ggsnGtpprime

ggsnGtpPrRequestAccepted

The number of GTP Prime data record transfer response Request Accepted received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrRequestAccepted

ggsnGtpPrRequestUnfulfilled

The number of GTP Prime data record transfer response Request Unfulfilled received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrRequestUnfulfilled

ggsnGtpPrServiceUnsupported

The number of GTP Prime data record transfer response Service Unsupported received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrServiceUnsupported

ggsnGtpPrSndDataRecordPackets

The number of GTP Prime data record transfer request Send Data Record packets sent by the GGSN

Data Source

GGSN

Source Field

ggsnGtpPrSndDataRecordPackets

ggsnGtpPrSystemFailure

The number of GTP Prime data record transfer response System Failure received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrSystemFailure

ggsnGtpPrVersionUnsupported

The number of GTP Prime data record transfer response Version Unsupported received by the GGSN.

Data Source

GGSN

Source Field

ggsnGtpPrVersionUnsupported

ggsnGtpPrVerUnsupPacketsReceived

The number of GTP Prime Version Unsupported packets received by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrVerUnsupPktsReceived

Source Section

ggsnGtpprime

ggsnGtpPrVerUnsupPacketsSent

The number of GTP Prime Version Unsupported packets sent by this GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpPrVerUnsupPacketsSent

Source Section

ggsnGtpprime

ggsnGtpRequestsAccepted

Results Request accepted (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpRequestsAccepted

Source Section

ggsnGtp

ggsnGtpUplinkBytes

GTP statistics Uplink Bytes Collected using CLI

Data Source

SGSN

Source Field

GTPstatisticsUplinkBytes

Source Section

ggsnstatisticsgtp

ggsnGtpUplinkBytes_jn

GTP statistics Uplink Bytes (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpUplinkBytes

Source Section

ggsnGtp

ggsnGtpUplinkPackets

GTP statistics Uplink Packets Collected using CLI

Data Source

SGSN

Source Field

GTPstatisticsUplinkpackets

Source Section

ggsnstatisticsgtp

ggsnGtpUplinkPackets_jn

GTP statistics Uplink Packets (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpUplinkPackets

Source Section

ggsnGtp

ggsnGtpVerUnsupPacketsReceived

Number of (GTP Message) Version not supported received in the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpVerUnsupPktsReceived

Source Section

ggsnGtp

ggsnGtpVerUnsupPacketsSent

Number of (GTP Message) Version not supported transmitted from the GGSN. (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnGtpVerUnsupPacketsSent

Source Section

ggsnGtp

ggsnNbrOfActivePdpContexts

Total number of active PDP contexts currently served by this GGSN Collected using CLI.

Data Source

SGSN

Source Field

ActivePDPcontexts

Source Section

ggsnstatistics

ggsnNbrOfActivePdpContexts_jn

The number of active PDP contexts on this GGSN.

Data Source

GGSN

Source Field

ggsnNbrOfActivePdpContexts

Source Section

ggsnGlobalStats

ggsnNbrOfActPdpContextsIpv6

The number of active IPv6 PDP contexts on this GGSN.

Data Source

GGSN

ggsnNbrOfSubscribers

The number of subscribers currently serviced by this GGSN. -Subscriber is uniquely identified by IMSI

Data Source

GGSN

Source Field

ggsnNbrOfSubscribers

ggsnNbrOfSubscribersMean

The mean number of subscribers serviced by this GGSN.

Data Source

GGSN

Source Field

ggsnNbrOfSubscribersMean

ggsnNbrOfTftFilters

The number of Traffic Flow Template filters on this GGSN

Data Source

GGSN

Source Field

ggsnNbrOfTftFilters

ggsnNeighborSolicitationRcv

The number of neighbor solicitation requests received by GGSN. (to discover the routers on the network)

Data Source

GGSN

Source Field

ggsnNeighborSolicitationRcv

ggsnNeighborSolicitationRsp

The number of neighbor solicitation responses from GGSN.

Data Source

GGSN

Source Field

ggsnNeighborSolicitationRsp

ggsnPayloadLoad

Gauge to keep track of the weighted load on the node for the payload part. The gauge is used for the new load balancing scheme.

Data Source

GGSN

Source Field

ggsnPayloadLoad

ggsnRouterSolicitationRcv

The number of router solicitation requests received by GGSN.

Data Source

GGSN

Source Field

ggsnRouterSolicitationRcv

ggsnRouterSolicitationRsp

The number of router solicitation responses from GGSN.

Data Source

GGSN

Source Field

ggsnRouterSolicitationRsp

ggsnSessionTimeoutDeactivation

The number of PDP contexts deactivated on this GGSN due to duration supervision function

Data Source

GGSN

Source Field

ggsnSessionTimeoutDeactivation

ggsnUplinkBytesIpv6

Total bytes for all processed IPv6 uplink packets via this GGSN.

Data Source

GGSN

Source Field

ggsnUplinkBytesIpv6

ggsnUplinkDropsBytes

The total number of uplink bytes dropped by this GGSN (SNMP DataStream)

Data Source

GGSN

Source Field

ggsnUplinkDropsBytes

Source Section

ggsnUplinkTrafficInfo

ggsnUplinkDropsIpv6

The number of dropped IPv6 packets in the uplink direction

Data Source

GGSN

Source Field

ggsnUplinkDropsIpv6

ggsnUplinkPacketsIpv6

Total IPv6 uplink packets processed by this GGSN.

Data Source

GGSN

Source Field

ggsnUplinkPacketsIpv6

gprsMmSgsnAttachRequests

Total number of attach requests per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnAttachRequests

Source Section

GPRS Mobility Management

gprsMmSgsnCurrentlyAttachedSubscribers

Number of currently attached subscriber per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnCurrentlyAttachedSubscribers

Source Section

GPRS Mobility Management

gprsMmSgsnInterRoutingAreaUpdateRequests

Total number of inter SGSN RA updates per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnInterRoutingAreaUpdateRequests

Source Section

GPRS Mobility Management

gprsMmSgsnIntraRoutingAreaUpdateRequests

Total number of intra SGSN RA updates per SGSN (excluding periodic RA update)

Data Source

SGSN

Source Field

gprsMmSgsnIntraRoutingAreaUpdateRequests

Source Section

GPRS Mobility Management

gprsMmSgsnPagingProcedures

Total number of paging procedures per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnPagingProcedures

Source Section

GPRS Mobility Management

gprsMmSgsnRejectedByAdmissionControl

Number of Attach or Inter SGSN RA-update requests that were rejected by admission control

Data Source

SGSN

Source Field

gprsMmSgsnRejectedByAdmissionControl

Source Section

GPRS Mobility Management

gprsMmSgsnSuccessfulPagingProcedures

Successful paging procedures per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnSuccessfulPagingProcedures

Source Section

GPRS Mobility Management

gprsMmSgsnUnsuccAttachRequestsCC14

Number of unsuccessful GPRS attach requests, where the Cause code in the Attach Reject is Cause Code #14

Data Source

SGSN

Source Field

gprsMmSgsnUnsuccessfulAttachRequestsCC14

Source Section

GPRS Mobility Management

gprsMmSgsnUnsuccessfulAttachRequests

Unsuccessful attach requests per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnUnsuccessfulAttachRequests

Source Section

GPRS Mobility Management

gprsMmSgsnUnsuccessfulAttachRequestsCC8

Number of unsuccessful Combined GPRS/IMSI attach, where the Cause code in the Attach Reject is Cause Code #8

Data Source

SGSN

Source Field

gprsMmSgsnUnsuccessfulAttachRequestsCC8

Source Section

GPRS Mobility Management

gprsMmSgsnUnsuccInterRoutingAreaUpdReq

Unsuccessful inter SGSN RA updates per SGSN

Data Source

SGSN

Source Field

gprsMmSgsnUnsuccessfulInterRoutingAreaUpdateRequests

Source Section

GPRS Mobility Management

gprsMmSgsnUnsuccIntraRoutingAreaUpdReq

Unsuccessful intra SGSN RA updates per SGSN (excluding periodic RA update)

Data Source

SGSN

Source Field

gprsMmSgsnUnsuccessfulIntraRoutingAreaUpdateRequests

Source Section

GPRS Mobility Management

gprsMmUnsuccessfulPagingProcedures

Unsuccessful paging procedures per SGSN.

Data Source

SGSN

Source Field

gprsMmUnsuccessfulPagingProcedures

Source Section

GPRS Mobility Management

gprsSmGgsnActivePdpContexts

Total number of active PDP contexts per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnActivePdpContexts

Source Section

GPRS Session Management

gprsSmGgsnPdpDeletions

Total number of PDP context deletion per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnPdpDeletions

Source Section

GPRS Session Management

gprsSmGgsnSuccessfulPdpCreations

Total number of successful PDP context creations per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnSuccessfulPdpCreations

Source Section

GPRS Session Management

gprsSmGgsnSuccessfulPdpUpdatings

Total number of successful PDP context Updating per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnSuccessfulPdpUpdatings

Source Section

GPRS Session Management

gprsSmGgsnUnsuccessfulPdpCreations

Total number of unsuccessful PDP context creations per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnUnsuccessfulPdpCreations

Source Section

GPRS Session Management

gprsSmGgsnUnsuccessfulPdpUpdatings

Total number of unsuccessful PDP context Updating per GGSN

Data Source

SGSN

Source Field

gprsSmGgsnUnsuccessfulPdpUpdatings

Source Section

GPRS Session Management

gprsSmSgsnDeactivations

Total number of PDP context deactivation per SGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

gprsSmSgsnDeactivations

Source Section

GPRS Session Management

gprsSmSgsnSuccessfulActivations

Number of successful PDP context activation per SGSN

Data Source

SGSN

Source Field

gprsSmSgsnSuccessfulActivations

Source Section

GPRS Session Management

gprsSmSgsnSuccessfulModifications

Total number of successful PDP context modification per SGSN.

Data Source

SGSN

Source Field

gprsSmSgsnSuccessfulModifications

Source Section

GPRS Session Management

gprsSmSgsnTotalActive

Total number for the active PDP contexts per SGSN.

Data Source

SGSN

Source Field

gprsSmSgsnTotalActive

Source Section

GPRS Session Management

gprsSmSgsnUnsuccActivCC27_28_29_32_33

Unsuccessful activation procedure per SGSN.

Data Source

SGSN

Source Field

gprsSmSgsnUnsuccessfulActivationsCC27_28_29_32_33

Source Section

GPRS Session Management

gprsSmSgsnUnsuccessfulActivations

Number of unsuccessful PDP context activation per SGSN.

Data Source

SGSN

Source Field

gprsSmSgsnUnsuccessfulActivations

Source Section

GPRS Session Management

gprsSmSgsnUnsuccessfulModifications

Unsuccessful PDP context modification per SGSN.

Data Source

SGSN

Source Field

gprsSmSgsnUnsuccessfulModifications

Source Section

GPRS Session Management

GSN_Type

GSN Type (GGSN, SGSN or CGSN)

Data Source

SGSN

Source Section

GPRS General

gsnAutomaticConnectionRestarts

The counter is incremented when an error is detected in software which handles a single subscriber (MS) and results in an automatic connection restart.

Data Source

SGSN

Source Field

gsnAutomaticConnectionRestarts

Source Section

ISP

gsnManualConnectionRestarts

The counter is incremented when an operator manually initiates a restart of a specific subscriber (MS) via the Application Execution PXM form.

Data Source

SGSN

Source Field

gsnManualConnectionRestarts

Source Section

ISP

gsnOloadProtectionGlobalIgnoredNewConn

The counter is incremented when a request for a new connection is ignored on the GPB with global functionality.

Data Source

SGSN

Source Field

gsnOverloadProtectionGlobalIgnoredNewConnection

Source Section

GSN Overload Protection

gsnOloadProtectionIgnoredExistingConn

The counter is incremented when a request for an existing connection is ignored on the GPB with local functionality.

Data Source

SGSN

Source Field

gsnOverloadProtectionIgnoredExistingConnections

Source Section

GSN Overload Protection

gsnOloadProtectionIgnoredNewConn

The counter is incremented when a request for a new connection is ignored on the GPB with local functionality.

Data Source

SGSN

Source Field

gsnOverloadProtectionIgnoredNewConnections

Source Section

GSN Overload Protection

gsnOverloadProtectionSs7MessageReject

The counter is incremented when an outgoing request through SS7 link is rejected

Data Source

SGSN

Source Field

gsnOverloadProtectionSs7MessageReject

Source Section

GSN Overload Protection

GSNRelease

Software Release

Data Source

SGSN

GSNRelease_GGSN

Release

Data Source

SGSN

Source Field

GSNRelease_GGSN

Source Section

GSN General

GTPGtpuInDataOctIu

The number of octets in incoming GPRS Tunneling Protocol (GTP) data packets on the Iu interface without the GTP-U header. Unit: KOctets (1024 Octets)

Data Source

SGSN

Source Field

GTP.GtpuInDataOctIu

GTPGtpuInDataPktIu

The number of GTP data PDUs which have been accepted and processed by the GTP-U protocol entity on the Iu interface.

Data Source

SGSN

Source Field

GTP.GtpuInDataPktIu

GTPGtpuOutDataOctIu

The number of octets in outgoing GTP data packets on the Iu interface without the GTP-U header. Unit: KOctets (1024 Octets)

Data Source

SGSN

Source Field

GTP.GtpuOutDataOctIu

GTPGtpuOutDataPktIu

The number of GTP data PDUs which have been generated by the GTP-U protocol entity on the Iu interface.

Data Source

SGSN

Source Field

GTP.GtpuOutDataPktIu

GTPInDataOctGn

The number of octets in incoming GTP data packets on the Gn interface.

Data Source

SGSN

Source Field

GTP.InDataOctGn

Source Section

GTP

GTPInDataPktGn

The number of GPRS Tunneling Protocol (GTP) Data PDUs, which have been accepted and processed by the GTP protocol entity on the Gn interface.

Data Source

SGSN

Source Field

GTP.InDataPktGn

Source Section

GTP

GTPMBMSInDataPktGn

This measurement provides the number of GTP data PDUs for MBMS bearer contexts which have been accepted and processed by the GTP entity on the Gn interface.

Data Source

SGSN

Source Field

GTP.MBMSInDataPktGn

Source Section

GTP

GTPMBMSOutDataPktIu

This measurement provides the number of MBMS bearer context GTP data PDUs which have been generated by the GTP-U protocol entity on the Iu interface.

Data Source

SGSN

Source Field

GTP.MBMSOutDataPktIu

Source Section

GTP

GTPOutDataOctGn

The number of octets in outgoing GTP data packets on the Gn interface.

Data Source

SGSN

Source Field

GTP.OutDataOctGn

Source Section

GTP

GTPOutDataPktGn

The number of GTP data PDUs, which have been generated by the GTP protocol entity on the Gn interface

Data Source

SGSN

Source Field

GTP.OutDataPktGn

Source Section

GTP

GTPPayloadgtpuErrorPkt

The number of incoming GTP data packets where payload length indicated in GTP header is inconsistent with actual length.

Data Source

SGSN

Source Field

GTP.PayloadgtpuErrorPkt

Source Section

GTP

HHOAttInterSGSNNew

This measurement type counts the number of Inter PS Handover attempts in new SGSN, including possible retransmissions. Trigger: Reception of Forward Relocation Request GTP-C message from oldSGSN GSM.

Data Source

SGSN

Source Field

HHO.AttInterSGSNNew

Source Section

Mobility Management

HHOAttInterSGSNOld

The number of Inter-SGSN PS Handover attempts in the old SGSN.

Data Source

SGSN

Source Field

HHO.AttInterSGSNOld

Source Section

Mobility Management

HHOAttIntraSGSN

This measurement type counts the number of Intra PS Handover attempts, including possible retransmissions. Trigger: Reception of PS Handover Required BSSGP message from BSS when Target CELL is situated under own SGSN.

Data Source

SGSN

Source Field

HHO.AttIntraSGSN

Source Section

Mobility Management

HHOAttOptIntraSGSN

This measurement type counts the number of Optimized PS Handover attempts, including possible retransmissions. Trigger: Reception of PS Handover Complete BSSGP message from BSS when no PS Handover Required has been received.

Data Source

SGSN

Source Field

HHO.AttOptIntraSGSN

Source Section

Mobility Management

HHOSuccInterSGSNNew

This measurement type counts the number of successful Inter PS Handover procedures in new SGSN. Trigger: Sending of Forward Relocation Complete GTP-C message to sourceSGSN GSM.

Data Source

SGSN

Source Field

HHO.SuccInterSGSNNew

Source Section

Mobility Management

HHOSuccInterSGSNOld

This measurement type counts the number of successful PS Handover procedures in old SGSN. Trigger: Reception of Forward Relocation Complete GTP-C message from targetSGSN GSM.

Data Source

SGSN

Source Field

HHO.SuccInterSGSNOld

Source Section

Mobility Management

HHOSuccIntraSGSN

This measurement type counts the number of successful Intra PS Handover procedures. Trigger: Reception of PS Handover Complete BSSGP message from BSS

Data Source

SGSN

Source Field

HHO.SuccIntraSGSN

Source Section

Mobility Management

HHOSuccOptIntraSGSN

This measurement type counts the number of successful Optimized PS Handover procedures. Trigger: Reception of PS Handover Complete BSSGP message from BSS when no PS Handover Required has been received

Data Source

SGSN

Source Field

HHO.SuccOptIntraSGSN

Source Section

Mobility Management

IRATHOAttInterSGSNNewGsmUmts

Counts the number of Inter Inter-Radio Access Technology (IRAT) PS Handover attempts in new SGSN WCDMA, including possible retransmissions. Trigger: Reception of Forward Relocation Request GPRS Tunneling Protocol - Control plane (GTP-C) message in WCDMA from source SGSN when source CELL is GSM.

Data Source

SGSN

Source Field

IRATHO.AttInterSGSNNewGsmUmts

Source Section

Mobility Management

IRATHOAttInterSGSNNewUmtsGsm

Counts the number of Inter IRAT PS Handover attempts in new SGSN when moving from WCDMA to GSM, including possible retransmissions. Trigger: Reception of Forward Relocation Request GTP-C message in GSM from source SGSN when source CELL is WCDMA.

Data Source

SGSN

Source Field

IRATHO.AttInterSGSNNewUmtsGsm

Source Section

Mobility Management

IRATHOAttInterSGSNOldGsmUmts

Counts the number of Inter IRAT PS Handover attempts in old SGSN GSM, including possible retransmissions. Trigger: Reception of PS Handover Required BSSGP message from Base Station Subsystem (BSS) when Target CELL is situated under cooperating WCDMA-SGSN.

Data Source

SGSN

Source Field

IRATHO.AttInterSGSNOldGsmUmts

Source Section

Mobility Management

IRATHOAttInterSGSNOldUmtsGsm

Counts the number of Inter IRAT PS Handover attempts in old SGSN when moving from WCDMA to GSM, including possible retransmissions. Trigger: Reception of Relocation Required RANAP message from RNC when Target CELL is situated under cooperating GSM-SGSN.

Data Source

SGSN

Source Field

IRATHO.AttInterSGSNOldUmtsGsm

Source Section

Mobility Management

IRATHOAttIntraSGSNGsmUmts

Counts the number of Intra SGSN IRAT PS Handover from GSM to WCDMA attempts, including possible retransmissions. Trigger: Reception of PS Handover Required BSSGP message from BSS when Target CELL is situated under own SGSN but under WCDMA control.

Data Source

SGSN

Source Field

IRATHO.AttIntraSGSNGsmUmts

Source Section

Mobility Management

IRATHOAttIntraSGSNUmtsGsm

Counts the number of Intra IRAT PS Handover attempts when moving from WCDMA to GSM, including possible retransmissions. Trigger: Reception of Relocation Required RANAP message from RNC when Target CELL is situated under own SGSN but under GSM control.

Data Source

SGSN

Source Field

IRATHO.AttIntraSGSNUmtsGsm

Source Section

Mobility Management

IRATHOSuccInterSGSNNewGsmUmts

Counts the number of successful Inter IRAT PS Handovers in new SGSN when moving from GSM to WCDMA. Trigger: Sending of Forward Relocation Complete GTP-C message in WCDMA to source SGSN GSM.

Data Source

SGSN

Source Field

IRATHO.SuccInterSGSNNewGsmUmts

Source Section

Mobility Management

IRATHOSuccInterSGSNNewUmtsGsm

Counts the number of successful Inter IRAT PS Handovers when moving from WCDMA to GSM. Trigger: Sending of Forward Relocation Complete GTP-C message in GSM to source SGSN WCDMA

Data Source

SGSN

Source Field

IRATHO.SuccInterSGSNNewUmtsGsm

Source Section

Mobility Management

IRATHOSuccInterSGSNOldGsmUmts

Counts the number of successful Inter IRAT PS Handovers when moving from GSM to WCDMA. Trigger: Reception of Forward Relocation Complete GTP-C message from target SGSN WCDMA when source SGSN is GSM.

Data Source

SGSN

Source Field

IRATHO.SuccInterSGSNOldGsmUmts

Source Section

Mobility Management

IRATHOSuccInterSGSNOldUmtsGsm

Counts the number of successful Inter IRAT PS Handovers in old SGSN when moving from WCDMA to GSM. Trigger: Reception of Forward Relocation Complete GTP-C message from target SGSN GSM when source SGSN is WCDMA.

Data Source

SGSN

Source Field

IRATHO.SuccInterSGSNOldUmtsGsm

Source Section

Mobility Management

IRATHOSuccIntraSGSNGsmUmts

Counts the number of successful Intra IRAT PS Handovers when moving from GSM to WCDMA. Trigger: Reception of Relocation Complete RANAP message from RNC when Source CELL is situated under own SGSN but under GSM control.

Data Source

SGSN

Source Field

IRATHO.SuccIntraSGSNGsmUmts

Source Section

Mobility Management

IRATHOSuccIntraSGSNUmtsGsm

Counts the number of successful Intra IRAT PS Handovers when moving from WCDMA to GSM. Trigger: Reception of PS Handover Complete BSSGP message from BSS when Source CELL is situated under own SGSN but under WCDMA control.

Data Source

SGSN

Source Field

IRATHO.SuccIntraSGSNUmtsGsm

Source Section

Mobility Management

ISYSCAttIntraSgsnGsmUmtsRau

The number of successful intra-SGSN inter-system changes from GSM to WCDMA Systems.

Data Source

SGSN

Source Field

ISYSC.AttIntraSgsnGSMUmtsRau

Source Section

WCDMA-GSM Intersystem Change

ISYSCAttIntraSgsnUmtsGsmRau

The number of attempted intra-SGSN inter-system changes from WCDMA Systems to GSM.

Data Source

SGSN

Source Field

ISYSC.AttIntraSgsnUmtsGsmRau

Source Section

WCDMA-GSM Intersystem Change

ISYSCSuccIntraSgsnGsmUmtsRau

The number of successful intra-SGSN inter-system changes from WCDMA Systems to GSM.

Data Source

SGSN

Source Field

ISYSC.SuccIntraSgsnGSMUmtsRau

Source Section

WCDMA-GSM Intersystem Change

ISYSCSuccIntraSgsnUmtsGsmRau

The number of successful intra-SGSN inter-system changes from WCDMA Systems to GSM.

Data Source

SGSN

Source Field

ISYSC.SuccIntraSgsnUmtsGsmRau

Source Section

WCDMA-GSM Intersystem Change

ISYSCUnsuccIntraSgsnGsmUmtsRauCSPSCoord

This measurement provides the number of intra-SGSN inter-system change procedures being rejected due to the coordination of CS and PS in an MOCN constellation.

Data Source

SGSN

Source Field

ISYSC.UnsuccIntraSgsnGsmUmtsRauCSPSCoord

Source Section

Mobility Management

jnxggsnDownlinkBytes

Total bytes for all processed downlink packets via this GGSN.

Data Source

GGSN

Source Field

ggsnDownlinkBytes

Source Section

ggsnDownlinkTrafficInfo

jnxggsnDownlinkDrops

The number of dropped packets by this GGSN in the downlink direction.

Data Source

GGSN

Source Field

ggsnDownlinkDrops

Source Section

ggsnDownlinkTrafficInfo

jnxggsnDownlinkPackets

Total downlink packets processed by this GGSN.

Data Source

GGSN

Source Field

ggsnDownlinkPackets

Source Section

ggsnDownlinkTrafficInfo

jnxggsnUplinkBytes

Total bytes for all processed uplink packets via this GGSN.

Data Source

GGSN

Source Field

ggsnUplinkBytes

Source Section

ggsnUplinkTrafficInfo

jnxggsnUplinkDrops

The number of dropped packets by this GGSN in the uplink direction.

Data Source

GGSN

Source Field

ggsnUplinkDrops

Source Section

ggsnUplinkTrafficInfo

jnxggsnUplinkPackets

Total uplink packets processed by this GGSN.

Data Source

GGSN

Source Field

ggsnUplinkPackets

Source Section

ggsnUplinkTrafficInfo

jnxicmpInAddrMask

The number of ICMP Address Mask Request messages received.

Data Source

GGSN

Source Field

icmpInAddrMask

Source Section

icmp

jnxicmpInAddrMaskReps

The number of ICMP Address Mask Reply messages received.

Data Source

GGSN

Source Field

icmpInAddrMaskReps

Source Section

icmp

jnxicmpInDestUnreachs

The number of ICMP Destination Unreachable messages received.

Data Source

GGSN

Source Field

icmpInDestUnreachs

Source Section

icmp

jnxicmpInEchoReps

The number of ICMP Echo Reply messages received.

Data Source

GGSN

Source Field

icmpInEchoReps

Source Section

icmp

jnxicmpInEchos

The number of ICMP Echo (request) messages received.

Data Source

GGSN

Source Field

icmpInEchos

Source Section

icmp

jnxicmpInErrors

The number of ICMP messages which the entity received but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc.).

Data Source

GGSN

Source Field

icmpInErrors

Source Section

icmp

jnxicmpInMsgs

The total number of ICMP messages which the entity received. Note that this counter includes all those counted by icmpInErrors.

Data Source

GGSN

Source Field

icmpInMsgs

Source Section

icmp

jnxicmpInParmProbs

The number of ICMP Parameter Problem messages received.

Data Source

GGSN

Source Field

icmpInParmProbs

Source Section

icmp

jnxicmpInRedirects

The number of ICMP Redirect messages received.

Data Source

GGSN

Source Field

icmpInRedirects

Source Section

icmp

jnxicmpInSrcQuenchs

The number of ICMP Source Quench messages received.

Data Source

GGSN

Source Field

icmpInSrcQuenchs

Source Section

icmp

jnxicmpInTimeExcds

The number of ICMP Time Exceeded messages received.

Data Source

GGSN

Source Field

icmpInTimeExcds

Source Section

icmp

jnxicmpInTimestampReps

The number of ICMP Timestamp Reply messages received.

Data Source

GGSN

Source Field

icmpInTimestampReps

Source Section

icmp

jnxicmpInTimestamps

The number of ICMP Timestamp (request) messages received.

Data Source

GGSN

Source Field

icmpInTimestamps

Source Section

icmp

jnxicmpOutAddrMaskReps

The number of ICMP Address Mask Reply messages sent.

Data Source

GGSN

Source Field

icmpOutAddrMaskReps

Source Section

icmp

jnxicmpOutAddrMasks

The number of ICMP Address Mask Request messages sent.

Data Source

GGSN

Source Field

icmpOutAddrMasks

Source Section

icmp

jnxicmpOutDestUnreachs

The number of ICMP Destination Unreachable messages sent.

Data Source

GGSN

Source Field

icmpOutDestUnreachs

Source Section

icmp

jnxicmpOutEchoReps

The number of ICMP Echo Reply messages sent.

Data Source

GGSN

Source Field

icmpOutEchoReps

Source Section

icmp

jnxicmpOutEchos

The number of ICMP Echo (request) messages sent.

Data Source

GGSN

Source Field

icmpOutEchos

Source Section

icmp

jnxicmpOutErrors

The number of ICMP messages which this entity did not send due to problems discovered within ICMP such as a lack of buffers.

Data Source

GGSN

Source Field

icmpOutErrors

Source Section

icmp

jnxicmpOutMsgs

The total number of ICMP messages which this entity attempted to send.

Data Source

GGSN

Source Field

icmpOutMsgs

Source Section

icmp

jnxicmpOutParmProbs

The number of ICMP Parameter Problem messages sent.

Data Source

GGSN

Source Field

icmpOutParmProbs

Source Section

icmp

jnxicmpOutRedirects

The number of ICMP Redirect messages sent.

Data Source

GGSN

Source Field

icmpOutRedirects

Source Section

icmp

jnxicmpOutSrcQuenchs

The number of ICMP Source Quench messages sent.

Data Source

GGSN

Source Field

icmpOutSrcQuenchs

Source Section

icmp

jnxicmpOutTimeExcds

The number of ICMP Time Exceeded messages sent.

Data Source

GGSN

Source Field

icmpOutTimeExcds

Source Section

icmp

jnxicmpOutTimestampReps

The number of ICMP Timestamp Reply messages sent.

Data Source

GGSN

Source Field

icmpOutTimestampReps

Source Section

icmp

jnxicmpOutTimestamps

The number of ICMP Timestamp (request) messages sent

Data Source

GGSN

Source Field

icmpOutTimestamps

Source Section

icmp

jnxIcmpv6StatsAddrUnreachs

The total number of 'address unreachable' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsAddrUnreachs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsAdminProhibits

The total number of 'dministratively prohibited messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsAdminProhibits

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadChecksums

The total number of messages with bad checksums.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadChecksums

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadCodes

The total number of messages with bad code fields.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadCodes

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadHdrFields

The total number of 'erroneous header field' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadHdrFields

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadLenth

The total number of messages with bad length.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadLenth

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadNextHdrs

The total number of 'unrecognized next header' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadNextHdrs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBadOptions

The total number of 'unrecognized option' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBadOptions

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsBeyondScopes

The total number of 'beyond scope' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsBeyondScopes

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsCantErrors

The total number of errors not generated because the the old message was an icmp error.

Data Source

GGSN

Source Field

jnxIcmpv6StatsCantErrors

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsErrors

The total number of calls to icmp_error.

Data Source

GGSN

Source Field

jnxIcmpv6StatsErrors

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsExceedReasms

The total number of 'time exceed reassembly' messages generated

Data Source

GGSN

Source Field

jnxIcmpv6StatsExceedReasms

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsExceedTrans

The total number of 'time exceed transit' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsExceedTrans

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsExcessNDOptions

The total number of messages processed with too many ND options

Data Source

GGSN

Source Field

jnxIcmpv6StatsExcessNDOptions

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInEchoReplies

The total number of Echo Reply messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInEchoReplies

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInEchoReqs

The total number of Echo Request messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInEchoReqs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInMLDones

The total number of Multicast Listener Done messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInMLDones

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInMLQueries

The total number of Multicast Listener Query messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInMLQueries

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInMLReports

The total number of Multicast Listener Report messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInMLReports

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInNbrAdvs

The total number of Neighbor Advertisement messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInNbrAdvs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInNbrSolicits

The total number of Neighbor Solicitation messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInNbrSolicits

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInNIRepplies

The total number of Node Information Report messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInNIRepplies

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInNIReqs

The total number of Node Information Request messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInNIReqs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInParamProbs

The total number of Parameter Problem messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInParamProbs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInPktTooBig

The total number of 'Packet Too Big' messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInPktTooBig

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInRedirects

The total number of Redirect messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInRedirects

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInRtrAdvs

The total number of Router Advertisement messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInRtrAdvs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInRtrRenumbers

The total number of Router Renumber messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInRtrRenumbers

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInRtrSolicits

The total number of Router Solicitation messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInRtrSolicits

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInTimeExceeds

The total number of Time Exceeded messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInTimeExceeds

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsInUnreachables

The total number of Unreachable messages received.

Data Source

GGSN

Source Field

jnxIcmpv6StatsInUnreachables

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsNoRoutes

The total number of no route messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsNoRoutes

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOthers

The total number of generated messages types other than the ones listed above.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOthers

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutEchoReplies

The total number of Echo Reply messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutEchoReplies

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutEchoReqs

The total number of Echo Request messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutEchoReqs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutMLDones

The total number of Multicast Listener Done messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutMLDones

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutMLQueries

The total number of Multicast Listener Query messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutMLQueries

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutMLReports

The total number of Multicast Listener Report messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutMLReports

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutNbrAdvs

The total number of Neighbor Advertisement messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutNbrAdvs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutNbrSolicits

The total number of Neighbor Solicitation messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutNbrSolicits

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutNIReplies

The total number of Node Information Report messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutNIReplies

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutNIReqs

The total number of Node Information Request messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutNIReqs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutParamProbs

The total number of Parameter Problem messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutParamProbs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutPktTooBigs

The total number of 'Packet Too Big' messages to be transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutPktTooBigs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutRedirects

The total number of Redirect messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutRedirects

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutRtrAdvs

The total number of Router Advertisement messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutRtrAdvs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutRtrRenumbers

The total number of Router Renumber messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutRtrRenumbers

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutRtrSolicits

The total number of Router Solicitation messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutRtrSolicits

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutTimeExceeds

The total number of Time Exceeded messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutTimeExceeds

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsOutUnreachables

The total number of Unreachable messages transmitted.

Data Source

GGSN

Source Field

jnxIcmpv6StatsOutUnreachables

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsPortUnreachs

The total number of 'port unreachable' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsPortUnreachs

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsRedirects

The total number of 'redirect' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsRedirects

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsResponses

The total number of message responses generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsResponses

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsTooBig

The total number of 'Packet Too Big' messages generated.

Data Source

GGSN

Source Field

jnxIcmpv6StatsTooBig

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsTooFreq

The total number of errors not generated due to rate limitations.

Data Source

GGSN

Source Field

jnxIcmpv6StatsTooFreq

Source Section

jnxIcmpv6GlobalStats

jnxIcmpv6StatsTooShort

The total number of messages less than the minimum length.

Data Source

GGSN

Source Field

jnxIcmpv6StatsTooShort

Source Section

jnxIcmpv6GlobalStats

jnxipForwDatagrams

The number of input datagrams for which this entity was not their final IP destination, as a result of which an attempt was made to find a route to forward them to that final destination.

Data Source

GGSN

Source Field

ipForwDatagrams

Source Section

ip

jnxipFragCreates

The number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

GGSN

Source Field

ipFragCreates

Source Section

ip

jnxipFragFails

The number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be, e.g., because their Don't Fragment flag was set.

Data Source

GGSN

Source Field

ipFragFails

Source Section

ip

jnxipFragOKs

The number of IP datagrams that have been successfully fragmented at this entity.

Data Source

GGSN

Source Field

ipFragOKs

Source Section

ip

jnxipInAddrErrors

The number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity.

Data Source

GGSN

Source Field

ipInAddrErrors

Source Section

ip

jnxipInDelivers

The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

Data Source

GGSN

Source Field

ipInDelivers

Source Section

ip

jnxipInDiscards

The number of input IP datagrams for which no problems were encountered to prevent their continued processing, but which were discarded (e.g., for lack of buffer space).

Data Source

GGSN

Source Field

ipInDiscards

Source Section

ip

jnxipInHdrErrors

The number of input datagrams discarded due to errors in their IP headers.

Data Source

GGSN

Source Field

ipInHdrErrors

Source Section

ip

jnxipInReceives

The total number of input datagrams received from interfaces, including those received in error.

Data Source

GGSN

Source Field

ipInReceives

Source Section

ip

jnxipInUnknownProtos

The number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

Data Source

GGSN

Source Field

ipInUnknownProtos

Source Section

ip

jnxipOutDiscards

The number of output IP datagrams for which no problem was encountered to prevent their transmission to their destination, but which were discarded (e.g., for lack of buffer space).

Data Source

GGSN

Source Field

ipOutDiscards

Source Section

ip

jnxipOutNoRoutes

The number of IP datagrams discarded because no route could be found to transmit them to their destination.

Data Source

GGSN

Source Field

ipOutNoRoutes

Source Section

ip

jnxipOutRequests

The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.

Data Source

GGSN

Source Field

ipOutRequests

Source Section

ip

jnxipReasmFails

The number of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc).

Data Source

GGSN

Source Field

ipReasmFails

Source Section

ip

jnxipReasmOKs

The number of IP datagrams successfully re-assembled.

Data Source

GGSN

Source Field

ipReasmOKs

Source Section

ip

jnxipReasmReqds

The number of IP fragments received which needed to be reassembled at this entity.

Data Source

GGSN

Source Field

ipReasmReqds

Source Section

ip

jnxipReasmTimeout

The maximum number of seconds that received fragments is held while they are awaiting reassembly at this entity.

Data Source

GGSN

Source Field

ipReasmTimeout

Source Section

ip

jnxipRoutingDiscards

The number of routing entries which were chosen to be discarded even though they are valid. One possible reason for discarding such an entry could be to free-up buffer space for other routing entries.

Data Source

GGSN

Source Field

ipRoutingDiscards

Source Section

ip

jnxIpv6StatsBadOptions

The total number of IPv6 packets encountering errors in option processing.

Data Source

GGSN

Source Field

jnxIpv6StatsBadOptions

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsBadScopes

The total number of IPv6 packets that violate scope rules.

Data Source

GGSN

Source Field

jnxIpv6StatsBadScopes

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsBadVersions

The total number of IPv6 packets with incorrect version number.

Data Source

GGSN

Source Field

jnxIpv6StatsBadVersions

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsDelivers

The total number of IPv6 packets delivered to upper layers.

Data Source

GGSN

Source Field

jnxIpv6StatsDelivers

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsForwards

The total number of IPv6 packets forwarded.

Data Source

GGSN

Source Field

jnxIpv6StatsForwards

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsForwCacheHits

The total number of forward cache hits.

Data Source

GGSN

Source Field

jnxIpv6StatsForwCacheHits

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsForwCacheMisses

The total number of forward cache misses.

Data Source

GGSN

Source Field

jnxIpv6StatsForwCacheMisses

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsFragDrops

The total number of fragments dropped.

Data Source

GGSN

Source Field

jnxIpv6StatsFragDrops

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsFragments

The total number of packet fragments received.

Data Source

GGSN

Source Field

jnxIpv6StatsFragments

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsFragOverFlows

The total number of fragments that exceeded limit.

Data Source

GGSN

Source Field

jnxIpv6StatsFragOverFlows

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsFragTimeOuts

The total number of fragments dropped due to timeouts.

Data Source

GGSN

Source Field

jnxIpv6StatsFragTimeOuts

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsHdrNotContinuous

The total number of IPv6 packets whose headers are not continuous.

Data Source

GGSN

Source Field

jnxIpv6StatsHdrNotContinuous

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInAhs

The total number of IPv6 packets with an IPv6 AH next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInAhs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInDestOpts

The total number of IPv6 packets with an IPv6 Destination Option next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInDestOpts

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInEspS

The total number of IPv6 packets with an IPv6 ESP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInEspS

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInEthS

The total number of IPv6 packets with an Ethernet next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInEthS

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInFragS

The total number of IPv6 packets with an IPv6 Fragment next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInFrgs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInHopByHops

The total number of IPv6 packets received with a Hop by Hop next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInHopByHops

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIcmps

The total number of IPv6 packets received with an ICMP(v4) next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIcmps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIcmpv6s

The total number of IPv6 packets with an ICMPv6 next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIcmpv6s

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIdps

The total number of IPv6 packets received with an xns IDP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIdps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIgmps

The total number of IPv6 packets received with an IGMP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIgmps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIps

The total number of IPv6 packets received with an IPv4 next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIpv6s

The total number of IPv6 packets with an IPv6 next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIpv6s

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInIsoIps

The total number of IPv6 packets with an ISO CLNP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInIsoIps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInNoNhs

The total number of IPv6 packets with no next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInNoNhs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInOspf

The total number of IPv6 packets with an OSPF next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInOspf

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInPims

The total number of IPv6 packets with a PIM next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInPims

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInRoutings

The total number of IPv6 packets with an IPv6 Routing next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInRoutings

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInTcps

The total number of IPv6 packets received with a TCP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInTcps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInTcps

The total number of IPv6 packets received with a TP4 next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInTcps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsInUdps

The total number of IPv6 packets received with a UDP next header.

Data Source

GGSN

Source Field

jnxIpv6StatsInUdps

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsMCNoDests

The total number of IPv6 Multicast packets dropped due to no destination.

Data Source

GGSN

Source Field

jnxIpv6StatsMCNoDests

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsNoGifs

The total number of tunneling IPv6 packets that can't find gif.

Data Source

GGSN

Source Field

jnxIpv6StatsNoGifs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsNotMcastMembers

The total number of IPv6 multicast packets which are not joined.

Data Source

GGSN

Source Field

jnxIpv6StatsNotMcastMembers

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOptRateDrops

The total number of IPv6 option packets dropped due to rate limits.

Data Source

GGSN

Source Field

jnxIpv6StatsOptRateDrops

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutDeadNextHops

The total number of output IPv6 packets destined to dead next hops.

Data Source

GGSN

Source Field

jnxIpv6StatsOutDeadNextHops

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutDiscards

The total number of output IPv6 packets dropped due to no bufs, etc.

Data Source

GGSN

Source Field

jnxIpv6StatsOutDiscards

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutFragCreates

The total number of output IPv6 packets that have been generated as a result of fragmentation at the output interface.

Data Source

GGSN

Source Field

jnxIpv6StatsOutFragCreates

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutFragFails

The total number of output IPv6 packets that can't be fragmented.

Data Source

GGSN

Source Field

jnxIpv6StatsOutFragFails

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutFragOKs

The total number of output IPv6 packets fragmented.

Data Source

GGSN

Source Field

jnxIpv6StatsOutFragOKs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutNoRoutes

The total number of output IPv6 packets discarded because no route could be found.

Data Source

GGSN

Source Field

jnxIpv6StatsOutNoRoutes

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsOutRequests

The total number of IPv6 packets generated by this host.

Data Source

GGSN

Source Field

jnxIpv6StatsOutRequests

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsRawOuts

The total number of IPv6 packets sent with fabricated IPv6 headers.

Data Source

GGSN

Source Field

jnxIpv6StatsRawOuts

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsReasmOKs

The total number of IPv6 packets reassembled successfully.

Data Source

GGSN

Source Field

jnxIpv6StatsReasmOKs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsReceives

The total number of IPv6 packets received.

Data Source

GGSN

Source Field

jnxIpv6StatsReceives

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsRedirects

The total number of IPv6 packets forwarded on the same net as received.

Data Source

GGSN

Source Field

jnxIpv6StatsRedirects

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsTooManyHdrs

The total number of IPv6 packets discarded due to too many headers.

Data Source

GGSN

Source Field

jnxIpv6StatsTooManyHdrs

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsTooShorts

The total number of IPv6 packets with size smaller than minimum.

Data Source

GGSN

Source Field

jnxIpv6StatsTooShorts

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsTooSmalls

The total number of IPv6 packets with data size less than data length.

Data Source

GGSN

Source Field

jnxIpv6StatsTooSmalls

Source Section

jnxIpv6GlobalStats

jnxIpv6StatsUnreachables

The total number of IPv6 packets received for unreachable destinations.

Data Source

GGSN

Source Field

jnxIpv6StatsUnreachables

Source Section

jnxIpv6GlobalStats

jnxOperationBuffer

The buffer pool utilization in percentage of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationBuffer

Source Section

jnxOperationBuffer

jnxOperationCPU

The CPU utilization in percentage of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationCPU

Source Section

jnxOperationCPU

jnxOperationDRAMsize

The DRAM size in bytes of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationDRAMsize

Source Section

jnxOperationDRAMsize

jnxOperationHeap

The heap utilization in percentage of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationHeap

Source Section

jnxOperationHeap

jnxOperationISR

The CPU utilization in percentage of this subject spending in interrupt service routine (ISR).
Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationISR

Source Section

jnxOperationISR

jnxOperationMemory

The installed memory size in Megabytes of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationMemory

Source Section

jnxOperationMemory

jnxOperationTemp

The temperature in Celsius (degrees C) of this subject. Zero if unavailable or nonapplicable.

Data Source

GGSN

Source Field

jnxOperationTemp

Source Section

jnxOperationTemp

MMAttachedLostG

The number of attached MSs lost due to a crash or restart, except for node restart and large restart. The measurement is collected and aggregated periodically. The accuracy may therefore be affected at repeated restarts.

Data Source

SGSN

Source Field

MM.AttachedLost.G

Source Section

Mobility Management

MMAttachedLostU

The number of attached MSs lost due to a crash or restart, except for node restart and large restart. The measurement is collected and aggregated periodically. The accuracy may therefore be affected at repeated restarts.

Data Source

SGSN

Source Field

MM.AttachedLost.U

Source Section

Mobility Management

MMAttAttachAcceptNon3GPPCompliantG

This is the name of the counter that gives the number of Attach Accept messages that are altered during retransmission due to non 3GPP compliant User Equipment (UEs).

Data Source

SGSN

Source Field

MM.AttAttachAcceptNon3GPPCompliant.G

Source Section

Mobility Management

MMAttAttachAcceptNon3GPPCompliantU

This is the name of the counter that gives the number of Attach Accept messages that are altered during retransmission due to non Third Generation Partnership Project (3GPP) compliant UEs.

Data Source

SGSN

Source Field

MM.AttAttachAcceptNon3GPPCompliant.U

Source Section

Mobility Management

MMAttAuthCiphReqNon3GPPCompliantG

This is the name of the counter that gives the number of Authentication and Ciphering Request messages that are altered during retransmission due to non 3GPP compliant UEs.

Data Source

SGSN

Source Field

MM.AttAuthCiphReqNon3GPPCompliant.G

Source Section

Mobility Management

MMAttAuthCiphReqNon3GPPCompliantU

This is the name of the counter that gives the number of Authentication and Ciphering Request messages that are altered during retransmission due to non 3GPP compliant UEs.

Data Source

SGSN

Source Field

MM.AttAuthCiphReqNon3GPPCompliant.U

Source Section

Mobility Management

MMAttChangeOfLocalTimeG

Incremented when SGSN detects a change in offset and/or daylight savings time in SGSNs handling of MS local time.

Data Source

SGSN

Source Field

MM.AttChangeOfLocalTime.G

Source Section

Mobility Management

MMAttChangeOfLocalTimeU

Incremented when SGSN detects a change in offset and/or daylight savings time in SGSNs handling of MS local time.

Data Source

SGSN

Source Field

MM.AttChangeOfLocalTime.U

Source Section

Mobility Management

MMAttCombiInterSgsnRaUpdateG

The number of combined RA/LA updates (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttCombiInterSgsnRaUpdate.G

MMAttCombiIntraSgsnRaUpdateG

The number of combined RA/LA updates (intra-SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttCombiIntraSgsnRaUpdate.G

MMAttDetachInactiveSubG

The number of attempted detach of inactive subscribers procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.AttDetachInactiveSub.G

Source Section

Mobility Management

MMAttImsiCombiInterSgsnRAUpdaG

The number of combined RA/LA updates with IMSI attach (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttImsiCombiInterSgsnRAUpdate.G

MMAttImsiCombiIntraSgsnRAUpdaG

The number of combined RA/LA updates with IMSI attach (intra SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttImsiCombiIntraSgsnRAUpdate.G

MMAttNormalIntraSgsnRaUpdateG

The number of attempted normal intra-SGSN RA Update procedures initiated in this SGSN. Periodic RA updates are not counted. Resending from MSs are also counted.

Data Source

SGSN

Source Field

MM.AttNormalIntraSgsnRaUpdate.G

MMAttRauAcceptNon3GPPCompliantG

This is the name of the counter that gives the number of Routing Area Update Accept messages that are altered during retransmission due to non 3GPP compliant UEs.

Data Source

SGSN

Source Field

MM.AttRauAcceptNon3GPPCompliant.G

Source Section

Mobility Management

MMAttRauAcceptNon3GPPCompliantU

This is the name of the counter that gives the number of Routing Area Update Accept messages that are altered during retransmission due to non 3GPP compliant UEs.

Data Source

SGSN

Source Field

MM.AttRauAcceptNon3GPPCompliant.U

Source Section

Mobility Management

MMAttServiceReq

The number of attempted Service Requests procedures in this SGSN of the data, signaling, or paging response type. It is increased when a Service Request is received from the MS.

Data Source

SGSN

Source Field

MM.AttServiceReq

MMAttServiceReqData

The number of attempted Service Request procedures in this SGSN of the data type. It is increased when a Service Request, with the data service type is received from the MS.

Data Source

SGSN

Source Field

MM.AttServiceReqData

MMAttServiceReqDataU

The number of attempted Service Request procedures in this SGSN UMTS of the data type. It is increased when a Service Request, with the data service type is received from the MS.

Data Source

SGSN

Source Field

MM.AttServiceReqData.U

Source Section

Mobility Management

MMAttServiceRequestU

The number of attempted Service Requests procedures in this SGSN UMTS of the data, signaling, or paging response type. It is increased when a Service Request is received from the MS.

Data Source

SGSN

Source Field

MM.AttServiceRequest.U

Source Section

Mobility Management

MMNbrActAttachedSubRAG

The number of attached subscribers per RA within this SGSN. Default Alarm Triggering Level: 90% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: 85% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: True

Data Source

SGSN

Source Field

MM.NbrActAttachedS.UbRA.G

MMNbrActAttachedSubRAU

The number of attached subscribers per RA within this SGSN. Default Alarm Triggering Level: 90% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: 85% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: False

Data Source

SGSN

Source Field

MM.NbrActAttachedS.UbRA.U

MMNbrActAttachedSubU

Number of attached Subscribers within this SGSN area.

Data Source

SGSN

Source Field

MM.NbrActAttachedSub.U

MMNbrCamelSubG

The number of attached subscriber within this SGSN area with CAMEL service. Default Alarm Triggering Level: value of 40% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: value of 35% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: False

Data Source

SGSN

Source Field

MM.NbrCamelSub.G

Source Section

Mobility Management

MMNbrCamelSubU

The number of attached subscriber within this SGSN area with CAMEL service. Default Alarm Triggering Level: value of 40% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: value of 35% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: False

Data Source

SGSN

Source Field

MM.NbrCamelSub.U

Source Section

Mobility Management

MMnbrDetachedInactiveSubG

The number of detached inactive subscribers procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.nbrDetachedInactiveSub.G

Source Section

Mobility Management

MMNbrHomeSubG

The number of GPRS home subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or GMM_DEREGISTERED. Only GPRS subscribers that are homed in the same GPRS network are considered.

Data Source

SGSN

Source Field

MM.NbrHomeSub.G

MMNbrHomeSubU

The number of GPRS home subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or GMM_DEREGISTERED. Only GPRS subscribers that are homed in the same GPRS network are considered.

Data Source

SGSN

Source Field

MM.NbrHomeSub.U

MMNbrSubPmmConnected

This measurement provides the number of subscribers in PMM CONNECTED state. Default Alarm Triggering Level: 180000 Default Alarm Clearing Level: 175000 Severity: Warning Default Supervision Active: False

Data Source

SGSN

Source Field

MM.NbrSubPmmConnected

Source Section

Mobility Management

MMNbrVisitingForeignG

The number of visiting foreign GPRS subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or GMM_DEREGISTERED. Only GPRS subscribers that are homed in a GPRS network of a foreign country are considered.

Data Source

SGSN

Source Field

MM.NbrVisitingForeign.G

MMNbrVisitingForeignU

The number of visiting foreign GPRS subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or GMM_DEREGISTERED. Only GPRS subscribers that are homed in a GPRS network of a foreign country are considered.

Data Source

SGSN

Source Field

MM.NbrVisitingForeign.U

MMNbrVisitingNatSubG

The number of visiting national GPRS subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or MM_DEREGISTERED. Only GPRS subscribers that are homed in a partner GPRS network of the same country are cons

Data Source

SGSN

Source Field

MM.NbrVisitingNatSub.G

MMNbrVisitingNatSubU

The number of visiting national GPRS subscribers located in the SGSN location register. The GPRS MM state of this subscriber is GMM_REGISTERED or GMM_DEREGISTERED. Only GPRS subscribers that are homed in a partner GPRS network of the same country are cons

Data Source

SGSN

Source Field

MM.NbrVisitingNatSub.U

MMSuccCombiInterSgsnRaUpdateG

The number of successfully performed combined RA/LA updates (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.SuccCombiInterSgsnRaUpdate.G

MMSuccCombiIntraSgsnRaUpdateG

The number of successfully performed combined RA/LA updates (intra SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.SuccCombiIntraSgsnRaUpdate.G

MMSuccGprsDetachSgsnG

The number of successfully completed SGSN-initiated GPRS detach procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.Succ.GprsDetachSgsn.G

MMSuccGprsDetachSgsnU

The number of successfully completed SGSN-initiated GPRS detach procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.Succ.GprsDetachSgsn.U

MMSuccNormalIntraSgsnRaUpdateG

The number of successfully performed normal intra-SGSN Routing Area Update procedures initiated in this SGSN. Periodic RA Updates and RA Updates acting as resume of a suspended MS are not counted. The counter is not stepped when resending RA Update Accept to the MS.

Data Source

SGSN

Source Field

MM.SuccNormalIntraSgsnRaUpdate.G

MMSuccNormalIntraSgsnRaUpdateU

The number of successfully performed normal intra-SGSN RA Update procedures initiated in this SGSN. Periodic RA updates and RA updates acting as resume of a suspended MS are not counted. The counter is not stepped when resending RA Update Accept to the MS.

Data Source

SGSN

Source Field

MM.SuccNormalIntraSgsnRaUpdate.U

MMUnsuccAttachCC11G

The number of unsuccessful MM attach procedures that return cause code #11.

Data Source

SGSN

Source Field

MM.UnsuccAttachCC11.G

Source Section

Mobility Management

MMUnsuccAttachCC11U

The number of unsuccessful MM attach procedures that return cause code #11.

Data Source

SGSN

Source Field

MM.UnsuccAttachCC11.U

Source Section

Mobility Management

MMUnsuccAttachCC13G

The number of unsuccessful MM procedures which returns cause code #13, (Roaming not allowed in this location area).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC13.G

MMUnsuccAttachCC13U

The number of unsuccessful MM procedures which returns cause code #13, (Roaming not allowed in this location area).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC13.U

MMUnsuccAttachCC14U

The number of unsuccessful MM procedures which returns cause code #14, (GPRS services not allowed in this PLMN).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC14.U

MMUnsuccAttachCC15G

The number of unsuccessful MM procedures, which returns cause code #15, (No suitable cells in location area).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC15.G

MMUnsuccAttachCC15U

The number of unsuccessful MM procedures, which returns cause code #15, (No suitable cells in location area).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC15.U

MMUnsuccAttachCC17G

The number of unsuccessful MM attach procedures, which returns cause code #17, (Network failure).

Data Source

SGSN

Source Field

MM.UnsUccAttachCC17.G

Source Section

Mobility Management

MMUnsuccAttachCC17U

The number of unsuccessful MM attach procedures, which returns cause code #17, (Network failure).

Data Source

SGSN

Source Field

MM.UnsUccAttachCC17.U

Source Section

Mobility Management

MMUnsuccAttachCC22G

The number of unsuccessful MM procedures which returns cause code #22, (Congestion).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC22.G

MMUnsuccAttachCC22U

The number of unsuccessful MM procedures which returns cause code #22, (Congestion).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC22.U

MMUnsuccAttachCC7G

The number of unsuccessful MM procedures which returns cause code #7 (GPRS Services not allowed).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC7.G

MMUnsuccAttachCC7U

The number of unsuccessful MM procedures which returns cause code #7, (GPRS Services not allowed).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC7.U

MMUnsuccAttachCC8U

The number of unsuccessful MM procedures which returns cause code #8, (GPRS and non-GPRS services not allowed).

Data Source

SGSN

Source Field

MM.UnsuccAttachCC8.U

MMUnsuccAttachCSPSCoordU

The number of attach procedures rejected due to Circuit-Switched (CS) and PS coordination in an MOCN constellation.

Data Source

SGSN

Source Field

MM.UnsuccAttachCSPSCoord.U

Source Section

Mobility Management

MMUnsuccInterSgsnRauCC10G

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #10, Implicitly detached.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRauCC10.G

Source Section

Mobility Management

MMUnsuccInterSgsnRauCC10U

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #10, Implicitly detached.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRauCC10.U

Source Section

Mobility Management

MMUnsuccInterSgsnRauCC14G

The number of unsuccessful MM inter-RA update procedures, which returns cause code#14, (GPRS services not allowed in this PLMN).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC14.G

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauCC14U

The number of unsuccessful MM inter-RA update procedures, which returns cause code#14, (GPRS services not allowed in this PLMN).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC14.U

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauCC15G

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #15, No Suitable Cells In Location Area.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRauCC15.G

Source Section

Mobility Management

MMUnsuccInterSgsnRauCC15U

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #15, No Suitable Cells In Location Area.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRauCC15.U

Source Section

Mobility Management

MMUnsuccInterSgsnRauCC17G

The number of unsuccessful MM inter-RA update procedures, which returns cause code#17, (Network failure).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC17.G

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauCC17U

The number of unsuccessful MM inter-RA update procedures, which returns cause code#17, (Network failure).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC17.U

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauCC9G

The number of unsuccessful MM inter-RA update procedures, which returns cause code#9, (MS identity cannot be derived by the network).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC9.G

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauCC9U

The number of unsuccessful MM inter-RA update procedures, which returns cause code#9, (MS identity cannot be derived by the network).

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRaUCC9.U

Source Section

Mobility Management Indexing

MMUnsuccInterSgsnRauG

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRau.G

Source Section

Mobility Management

MMUnsuccInterSgsnRauU

This measurement provides the number of unsuccessful MM inter- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS.

Data Source

SGSN

Source Field

MM.UnsuccInterSgsnRau.U

Source Section

Mobility Management

MMUnsuccIntraSgsnRauCC14G

The number of unsuccessful MM intra-RA update procedures, which returns cause code#14, meaning GPRS services not allowed in this PLMN.

Data Source

SGSN

Source Field

MM.UnsUccIntraSgsnRaUCC14.G

Source Section

Mobility Management Indexing

MMUnsuccIntraSgsnRauCC14U

The number of unsuccessful MM intra-RA update procedures, which returns cause code#14, meaning GPRS services not allowed in this PLMN.

Data Source

SGSN

Source Field

MM.UnsUccIntraSgsnRaUCC14.U

Source Section

Mobility Management Indexing

MMUnsuccIntraSgsnRauCC15G

This measurement provides the number of unsuccessful MM intra- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #15, No Suitable Cells In Location Area.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRauCC15.G

Source Section

Mobility Management

MMUnsuccIntraSgsnRauCC15U

This measurement provides the number of unsuccessful MM intra- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS with cause code #15, No Suitable Cells In Location Area.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRauCC15.U

Source Section

Mobility Management

MMUnsuccIntraSgsnRauCC17G

The number of unsuccessful MM intra-RA Update procedures, which returns cause code#17, meaning network failure.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRaUCC17.G

Source Section

Mobility Management Indexing

MMUnsuccIntraSgsnRauCC17U

The number of unsuccessful MM intra-RA Update procedures, which returns cause code#17, meaning network failure.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRaUCC17.U

Source Section

Mobility Management Indexing

MMUnsuccIntraSgsnRAUCSPSCoordU

This measurement provides the number of intra-SGSN RAU procedures being rejected due to the coordination of CS and PS in an MOCN constellation.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRAUCSPSCoord.U

Source Section

Mobility Management

MMUnsuccIntraSgsnRauG

This measurement provides the number of unsuccessful MM intra-RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRau.G

Source Section

Mobility Management

MMUnsuccIntraSgsnRauU

This measurement provides the number of unsuccessful MM intra- RAU procedures, that is, whenever a Routing Area Update Reject message is sent to the MS.

Data Source

SGSN

Source Field

MM.UnsuccIntraSgsnRau.U

Source Section

Mobility Management

MMUnsuccISRAUCSPSCoordU

The number of Inter-SGSN Routing Area Update procedures rejected due to CS and PS coordination in an MOCN constellation.

Data Source

SGSN

Source Field

MM.UnsuccISRAUCSPSCoord.U

Source Section

Mobility Management

MMUnsuccServiceReq

The number of unsuccessful Service Request procedures in this SGSN (U). It is increased when a Service Reject message is sent.

Data Source

SGSN

Source Field

MM.UnsuccServiceReq

Source Section

Mobility Management Indexing

MMUnsuccServiceReqU

The number of unsuccessful Service Request procedures in this SGSN. It is increased when a Service Reject message is sent.

Data Source

SGSN

Source Field

MM.UnsuccServiceReq.U

Source Section

Mobility Management Indexing

nbrLlcFramesReceived

The number of received LLC frames by the SGSN.

Data Source

SGSN

Source Field

nbrLlcFramesReceived

Source Section

LLC

nbrLlcFramesSent

The number of LLC frames sent by the SGSN.

Data Source

SGSN

Source Field

nbrLlcFramesSent

Source Section

LLC

nbrOfAttachedSub

Number of attached subscriber within this SGSN area.

Data Source

SGSN

Source Field

nbrOfAttachedSub

Source Section

GPRS Mobility Management

nbrOfBlackAnswerInSgsn

The number of black list answers received from the EIR. Note! The counter contains a total count for both GSM and WCDMA.

Data Source

SGSN

Source Field

nbrOfBlackAnswerInSgsn

Source Section

Equipment

nbrOfCheckIMEIRequest

The number of check IMEI requests sent to the EIR. Note that the counter contains a total count for both GSM and WCDMA.

Data Source

SGSN

Source Field

nbrOfCheckIMEIRequest

Source Section

Equipment

nbrOfGreyAnswerInSgsn

The number of grey list answers received from the EIR. Note! The counter contains a total count for both GSM and WCDMA.

Data Source

SGSN

Source Field

nbrOfGreyAnswerInSgsn

Source Section

Equipment

nbrOfSubReady

Number of subscribers in READY state within this SGSN area.

Data Source

SGSN

Source Field

nbrOfSubReady

Source Section

State

nbrOfSubStandby

Number of subscribers in STANDBY state within this SGSN area.

Data Source

SGSN

Source Field

nbrOfSubStandby

Source Section

State

nbrOfUnknownAnswerInSgsn

The number of unknown IMEI answers received from the EIR. Note that the counter contains a total count for both GSM and WCDMA.

Data Source

SGSN

Source Field

nbrOfUnknownAnswerInSgsn

Source Section

Equipment

nbrOfWhiteAnswerInSgsn

The number of white list answers received from the EIR. Note! The counter contains a total count for both GSM and WCDM

Data Source

SGSN

Source Field

nbrOfWhiteAnswerInSgsn

Source Section

Equipment

nbrSubsWithActivePdpInSgsn

Number of mobile subscribers with activated PDP.

Data Source

SGSN

Source Field

nbrSubsWithActivePdpInSgsn

Source Section

GPRS Session Management

NoOfRunDialTot

The number of running dialogues, total.

Data Source

SGSN

Source Field

ss7NoOfRunDialTot

Source Section

SS7 TCAP Layer

NoOfRunOpTot

The number of running operations, total.

Data Source

SGSN

Source Field

ss7NoOfRunOpTot

Source Section

SS7 TCAP Layer

PDPcreations

Total number of attempted PDP context activation procedures served by this GGSN Collected using CLI.

Data Source

SGSN

Source Field

PDPcreations

Source Section

ggsnstatistics

pmReadingsPerHour

The current maximum number of measurement type readings per hour

Data Source

SGSN

Source Field

pmReadingsPerHour

Source Section

PM

pmReadingsPerOccasion

The current maximum number of measurement type readings per reading occasion

Data Source

SGSN

Source Field

pmReadingsPerOccasion

Source Section

PM

QoSAttActConvsPdpContextG

The number of attempted conversational PDP context activation procedures. The counter is incremented when the MS requests the QoS class conversational.

Data Source

SGSN

Source Field

QoS.AttActConversationalPdpContext.G

Source Section

Quality of Service

QoSAttActConvsPdpContextU

The number of attempted conversational PDP context activation procedures. The counter is incremented when the MS requests the QoS class conversational.

Data Source

SGSN

Source Field

QoS.AttActConversationalPdpContext.U

Source Section

Quality of Service

QoSAttActInteractPdpContextG

The number of attempted interactive PDP context activation procedures. The counter is incremented when the MS requests the QoS class interactive or the subscribed QoS class, when the subscribed QoS class is interactive.

Data Source

SGSN

Source Field

QoS.AttActInteractivePdpContext.G

Source Section

Quality of Service

QoSAttActInteractPdpContextU

The number of attempted interactive PDP context activation procedures. The counter is incremented when the MS requests the QoS class interactive or the subscribed QoS class, when the subscribed QoS class is interactive.

Data Source

SGSN

Source Field

QoS.AttActInteractivePdpContext.U

Source Section

Quality of Service

QoSAttActStreamingPdpContextG

The number of attempted streaming PDP context activation procedures. The counter is incremented when the MS requests the QoS class streaming.

Data Source

SGSN

Source Field

QoS.AttActStreamingPdpContext.G

Source Section

Quality of Service

QoSAttActStreamingPdpContextU

The number of attempted streaming PDP context activation procedures. The counter is incremented when the MS requests the QoS class streaming.

Data Source

SGSN

Source Field

QoS.AttActStreamingPdpContext.U

Source Section

Quality of Service

QoSCurrentGuaranteedBitRate

The current aggregated guaranteed bit rate (UL+DL) for the node, related to streaming PDP contexts.

Data Source

SGSN

Source Field

QoSCurrentGuaranteedBitRate

Source Section

Quality of Service

QoSCurrentGuaranteedBitRateG

The current aggregated guaranteed bit rate (UL+DL) for the node, related to streaming PDP contexts. The QoS.CurrentGuaranteedBitRate counter is split into G and W counters.

Data Source

SGSN

Source Field

QoS.CurrentGuaranteedBitRate.G

Source Section

Quality of Service

QoSCurrentGuaranteedBitRateU

The current aggregated guaranteed bit rate (UL+DL) for the node, related to streaming PDP contexts. The QoS.CurrentGuaranteedBitRate counter is split into G and W counters. R8MD description changes: The current aggregated Guaranteed Bit Rate (uplink and downlink) for the SGSN, related to the traffic classes conversational and streaming.

Data Source

SGSN

Source Field

QoS.CurrentGuaranteedBitRate.U

Source Section

Quality of Service

QoSDLBackgroundPktDiscardedG

The number of downlink background packets discarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLBackgroundPktDiscarded.G

Source Section

Quality of Service

QoSDLBackgroundPktDiscardedU

The number of WCDMA downlink background packets discarded.

Data Source

SGSN

Source Field

QoS.DLBackgroundPktDiscarded.U

Source Section

Quality of Service

QoS.DLBackgroundPktForwardedG

The number of downlink background packets forwarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLBackgroundPktForwarded.G

Source Section

Quality of Service

QoS.DLBackgroundPktForwardedU

The number of WCDMA downlink background packets forwarded.

Data Source

SGSN

Source Field

QoS.DLBackgroundPktForwarded.U

Source Section

Quality of Service

QoS.DLConvPktDiscardedG

The number of discarded downlink conversational packets.

Data Source

SGSN

Source Field

QoS.DLConvPktDiscarded.G

Source Section

Quality of Service

QoS.DLConvsPktDiscardedU

The number of discarded downlink conversational packets.

Data Source

SGSN

Source Field

QoS.DLConversationalPktDiscarded.U

Source Section

Quality of Service

QoS.DLConvsPktForwardedG

The number of forwarded downlink conversational packets.

Data Source

SGSN

Source Field

QoS.DLConversationalPktForwarded.G

Source Section

Quality of Service

QoS.DLConvsPktForwardedU

The number of forwarded downlink conversational packets.

Data Source

SGSN

Source Field

QoS.DLConversationalPktForwarded.U

Source Section

Quality of Service

QoS.DLInteractivePktDiscardedG

The number of downlink interactive packets discarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLInteractivePktDiscarded.G

Source Section

Quality of Service

QoS.DLInteractivePktDiscarded.U

The number of WCDMA downlink interactive packets discarded.

Data Source

SGSN

Source Field

QoS.DLInteractivePktDiscarded.U

Source Section

Quality of Service

QoS.DLInteractivePktForwarded.G

The number of downlink interactive packets forwarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLInteractivePktForwarded.G

Source Section

Quality of Service

QoS.DLInteractivePktForwarded.U

The number of WCDMA downlink interactive packets forwarded.

Data Source

SGSN

Source Field

QoS.DLInteractivePktForwarded.U

Source Section

Quality of Service

QoSDLStreamingPktDiscardedG

The number of downlink streaming packets discarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLStreamingPktDiscarded.G

Source Section

Quality of Service

QoSSDLStreamingPktDiscardedU

The number of WCDMA downlink streaming packets discarded.

Data Source

SGSN

Source Field

QoS.DLStreamingPktDiscarded.U

Source Section

Quality of Service

QoSDLStreamingPktForwardedG

The number of downlink streaming packets forwarded on the LLC layer.

Data Source

SGSN

Source Field

QoS.DLStreamingPktForwarded.G

Source Section

Quality of Service

QoS.DL.StreamingPktForwarded.U

The number of WCDMA downlink streaming packets forwarded.

Data Source

SGSN

Source Field

QoS.DL.StreamingPktForwarded.U

Source Section

Quality of Service

QoS.GuaranteedBitRateDowngrades.G

The number of rejected conversational and downgraded streaming PDP context activation procedures. The counter is incremented when the SGSN, due to admission control, downgrades the requested streaming QoS class to the interactive QoS class. It is not incremented for downgrades related to subscription, highest QoS, GGSN-, or BSS-initiated downgrades.

Data Source

SGSN

Source Field

QoS.GuaranteedBitRateDowngrades.G

Source Section

Quality of Service

QoS.GuaranteedBitRateDowngrades.U

The number of rejected conversational and downgraded streaming PDP context activation procedures. The counter is incremented when the SGSN, due to admission control, downgrades the requested streaming QoS class to the interactive QoS class. It is not incremented for downgrades related to subscription, highest QoS, GGSN-, or RNC-initiated downgrades. R8MD description changes: The number of times the SGSN has failed to reserve GBR resources for the traffic classes conversational and streaming. If streaming, the traffic class might have been downgraded to interactive.

Data Source

SGSN

Source Field

QoS.GuaranteedBitRateDowngrades.U

Source Section

Quality of Service

QoS.GuaranteedBitRateAttemptsG

The number of PDP context activation procedures checked for admission control. The counter is incremented when the SGSN checks Guaranteed Bit Rate (GBR) (admission control) for the conversational and streaming QoS classes.

Data Source

SGSN

Source Field

QoS.GuaranteedBitRateAttempts.G

Source Section

Quality of Service

QoS.GuaranteedBitRateAttemptsU

The number of PDP context activation procedures checked for admission control. The counter is incremented when the SGSN checks GBR (admission control) for the conversational and streaming QoS classes. R8MD description changes: The number of times the SGSN has attempted to reserve Guaranteed Bit Rate (GBR) resources for the traffic classes conversational and streaming.

Data Source

SGSN

Source Field

QoS.GuaranteedBitRateAttempts.U

Source Section

Quality of Service

QoS.NbrActConvsPdpContextG

The number of currently active conversational PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActConversationalPdpContext.G

Source Section

Quality of Service

QoS.NbrActConvsPdpContextU

The number of currently active conversational PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActConversationalPdpContext.U

Source Section

Quality of Service

QoS.NbrActInteractPdpContextG

The number of currently active interactive PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActInteractivePdpContext.G

Source Section

Quality of Service

QoS.NbrActInteractPdpContextU

The number of currently active interactive PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActInteractivePdpContext.U

Source Section

Quality of Service

QoS.NbrActStreamingPdpContext.G

The number of currently active streaming PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActStreamingPdpContext.G

Source Section

Quality of Service

QoS.NbrActStreamingPdpContext.U

The number of currently active streaming PDP contexts.

Data Source

SGSN

Source Field

QoS.NbrActStreamingPdpContext.U

Source Section

Quality of Service

QoS.UplinkBackgroundPktForwarded

The number of uplink background packets forwarded.

Data Source

SGSN

Source Field

QoS.ULBackgroundPktForwarded

Source Section

Quality of Service

QoSULConvsPktForwarded

The number of forwarded uplink conversational packets.

Data Source

SGSN

Source Field

QoS.ULConversationalPktForwarded

Source Section

Quality of Service

QoSULInteractivePktForwarded

The number of uplink interactive packets forwarded.

Data Source

SGSN

Source Field

QoS.ULInteractivePktForwarded

Source Section

Quality of Service

QoSULStreamingPktForwarded

The number of uplink streaming packets forwarded.

Data Source

SGSN

Source Field

QoS.ULStreamingPktForwarded

Source Section

Quality of Service

Release_SNMP_GGSN

Release

Data Source

GGSN

Source Field

Release_SNMP_GGSN

Source Section

GGSN General

RELOCAttInterSGSN

The number of attempted inter-SGSN SRNS relocations.

Data Source

SGSN

Source Field

RELOC.AttInterSGSN

Source Section

SRNS Relocation

RELOCAttInterSGSNNew

The number of attempted inter-SGSN SRNS relocations counted in the target SGSN.

Data Source

SGSN

Source Field

RELOC.AttInterSGSNNew

Source Section

SRNS Relocation

RELOCAttIntraSGSN

The number of attempted intra-SGSN Serving Radio Network Subsystem (SRNS) relocations.

Data Source

SGSN

Source Field

RELOC.AttIntraSGSN

Source Section

SRNS Relocation

RELOCFailInterSGSNInt

The number of failed inter-SGSN SRNS relocations counted in the source SGSN that is due to SGSN-internal reasons.

Data Source

SGSN

Source Field

RELOC.FailInterSGSNInt

Source Section

SRNS Relocation

RELOCFailIntraSGSNInt

The number of failed intra-SGSN SRNS relocations due to internal reasons.

Data Source

SGSN

Source Field

RELOC.FailIntraSGSNInt

Source Section

SRNS Relocation

RELOCSuccInterSGSN

The number of successful inter-SGSN SRNS relocations counted in the source SGSN.

Data Source

SGSN

Source Field

RELOC.SuccInterSGSN

Source Section

SRNS Relocation

RELOCSuccInterSGSNNew

The number of successful inter-SGSN SRNS relocations counted in the target SGSN.

Data Source

SGSN

Source Field

RELOC.SuccInterSGSNNew

Source Section

SRNS Relocation

RELOCSuccIntraSGSN

The number of successful intra-SGSN SRNS relocations.

Data Source

SGSN

Source Field

RELOC.SuccIntraSGSN

Source Section

SRNS Relocation

S_PayloadgtpuErrorPkt

Payload length indicated in GTP header inconsistent with actual length

Data Source

SGSN

S_PayloadgtpuInDataOctGn

Number of octets of incoming GTP data packets on the Gn interface.

Data Source

SGSN

S_PayloadgtpuInDataOctIu

Number of octets of incoming GTP data packets on the Iu interface.

Data Source

SGSN

S_PayloadgtpuInDataPktGn

Number of incoming GTP data packets on the Gn interface.

Data Source

SGSN

S_PayloadgtpuInDataPktIu

Number of Incoming GTP data packets on the Iu interface.

Data Source

SGSN

S_PayloadgtpuOutDataOctGn

Number of octets of outgoing GTP data packets on the Gn interface.

Data Source

SGSN

S_PayloadgtpuOutDataOctIu

Number of octets of outgoing GTP data packets on the Iu interface.

Data Source

SGSN

S_PayloadgtpuOutDataPktGn

Number of outgoing GTP data packets on the Gn interface.

Data Source

SGSN

S_PayloadgtpuOutDataPktIu

Number of outgoing GTP data packets on the Iu interface

Data Source

SGSN

SECAttAuthProcsSgsnSimG

The number of authentication procedures that are started within this SGSN area for a subscriber using a SIM.

Data Source

SGSN

Source Field

SEC.AttAuthProcsSgsnSim.G

Source Section

Security

SECAttAuthProcsSgsnSimU

The number of authentication procedures that are started within this SGSN area for a subscriber using a SIM. Valid for GSM subscribers located within WCDMA Access System.

Data Source

SGSN

Source Field

SEC.AttAuthProcsSgsnSim.U

SECAttAuthProcsSgsnUsimG

The number of authentication procedures that are started within this SGSN area for a subscriber using a Universal Subscriber Identity Module (USIM). Valid for WCDMA subscribers located within GSM Access Systems.

Data Source

SGSN

Source Field

SEC.AttAuthProcsSgsnUsim.G

SECAttAuthProcsSgsnUsimU

The number of authentication procedures that are started within this SGSN area for a subscriber using a USIM. Valid for WCDMA subscribers located within WCDMA Access Systems.

Data Source

SGSN

Source Field

SEC.AttAuthProcsSgsnUsim.U

SECAttContextRequestToPsgsnG

The number of SGSN context requests sent to a partner (previous) SGSN for subscribers registering a fresh in this SGSN. Resendings are also counted.

Data Source

SGSN

Source Field

SEC.AttContextRequestToPSgsn.G

Source Section

Security

SECAttContextRequestToPsgsnU

The number of SGSN context requests sent to a partner (previous) SGSN for subscribers registering a fresh in this SGSN. Resendings are also counted.

Data Source

SGSN

Source Field

SEC.AttContextRequestToPSgsn.U

Source Section

Security

SECAttIdentityReqImsiU

The number of attempted Identity Request procedures initiated by this SGSN.

Data Source

SGSN

Source Field

SEC.AttIdentityReqImsi.U

SECAttSecMode

The number of security mode control procedures started by the SGSN.

Data Source

SGSN

Source Field

SEC.AttSecMode

Source Section

Security

SECRecPOAuthFailSgsnG

The number of ciphering and authentication failures within this SGSN area.

Data Source

SGSN

Source Field

SEC.RecPOAuthFailSgsn.G

SECRecPOAuthFailSgsnU

The number of ciphering and authentication failures within this SGSN area.

Data Source

SGSN

Source Field

SEC.RecPOAuthFailSgsn.U

SECSuccAuthProcsSgsnSimG

The number of successful authentication procedures within this SGSN area for a subscriber using a SIM.

Data Source

SGSN

Source Field

SEC.SuccAuthProcsSgsnSim.G

Source Section

Security

SECSuccAuthProcsSgsnSimU

The number of successful authentication procedures within this SGSN area, for a subscriber using a SIM. Valid for GSM subscribers located within WCDMA access System.

Data Source

SGSN

Source Field

SEC.SuccAuthProcsSgsnSim.U

SECSuccAuthProcsSgsnUsimG

The number of successful authentication procedures within this SGSN area, for a subscriber using a USIM. Valid for WCDMA subscribers located within GSM Access Systems.

Data Source

SGSN

Source Field

SEC.SuccAuthProcsSgsnUsim.G

SECSuccAuthProcsSgsnUsimU

The number of successful authentication procedures within this SGSN area, for a subscriber using a USIM. Valid for WCDMA subscribers located within WCDMA Access Systems.

Data Source

SGSN

Source Field

SEC.SuccAuthProcsSgsnUsim.U

SECSuccContextRequestToPsgsnG

The number of successfully replied SGSN context requests that were sent to a partner (previous) SGSN for subscribers registering afresh in this SGSN.

Data Source

SGSN

Source Field

SEC.SuccContextRequestToPSgsn.G

Source Section

Security

SECSuccContextRequestToPsgsnU

The number of successfully replied SGSN context requests that were sent to a partner (previous) SGSN for subscribers registering afresh in this SGSN.

Data Source

SGSN

Source Field

SEC.SuccContextRequestToPSgsn.U

Source Section

Security

SECSuccIdentityReqImsiU

The number of successfully completed Identity Request procedures initiated by this SGSN.

Data Source

SGSN

Source Field

SEC.SuccIdentityReqImsi.U

SECSuccSecMode

The number of successful security mode procedures.

Data Source

SGSN

Source Field

SEC.SuccSecMode

Source Section

Security

Shared

Shared

Data Source

SGSN

Source Field

Shared

Source Section

ggsnstatistics

SMAttActPdpContextDynU

Number of attempted dynamic PDP context activation procedures initiated by MS

Data Source

SGSN

Source Field

SM.AttActPdpContextDyn.U

SMAttActPdpContextG

The counter is incremented for each Activate PDP Context Request received on the Gb Interface

Data Source

SGSN

Source Field

SM.AttActPdpContext.G

Source Section

GPRS Session Management

SMAttActPdpContextSgsnHomeG

The number of attempted PDP Context Activation procedures per SGSN for home subscribers. Home subscribers are defined by the roaming status parameter during the IMSI-series configuration.

Data Source

SGSN

Source Field

SM.AttActPdpContextSgsnHome.G

Source Section

Session Management

SMAttActPdpContextSgsnHomeU

The number of attempted PDP Context Activation procedures per SGSN for home subscribers. Home subscribers are defined by the roaming status parameter during the IMSI-series configuration.

Data Source

SGSN

Source Field

SM.AttActPdpContextSgsnHome.U

Source Section

Session Management

SMAttActPdpContextU

Number of attempted PDP context activation procedures initiated by MS.

Data Source

SGSN

Source Field

SM.AttActPdpContext.U

SMAttActSecondPdpContextG

The number of attempted secondary PDP context activation procedures.

Data Source

SGSN

Source Field

SM.AttActSecondPdpContext.G

Source Section

Session Management

SMAttActSecondPdpContextU

The number of attempted secondary PDP context activation procedures.

Data Source

SGSN

Source Field

SM.AttActSecondPdpContext.U

Source Section

Session Management

SMAttDeactPdpContextGgsnG

The counter is incremented for each Deactivate PDP Context Request received on the Gn Interface. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextGgsn.G

Source Section

Session Management

SMAttDeactPdpContextGgsnU

Number of attempted PDP context deactivation procedures initiated by the GGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextGgsn.U

Source Section

Session Management

SMAttDeactPdpContextMsG

The counter is incremented for each Deactivate PDP Context Request received on the Gb Interface. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextMs.G

Source Section

Session Management

SMAttDeactPdpContextMsU

Number of attempted PDP context deactivation procedures initiated by the MS. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextMs.U

Source Section

Session Management

SMAttDeactPdpContextSgsnCC38G

The number of PDP Context Deactivation procedures initiated by the SGSN due to cause code#38, (network failure, being sent to the MS). R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsnCC38.G

Source Section

Session Management

SMAttDeactPdpContextSgsnCC38U

The number of PDP Context Deactivation procedures initiated by the SGSN due to cause code#38, (network failure, being sent to the MS). R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsnCC38.U

Source Section

Session Management

SMAttDeactPdpContextSgsnCC39G

The number of PDP Context Deactivation procedures initiated by the SGSN due to cause code#39, (reactivation requested, being sent to the MS). R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsnCC39.G

Source Section

Session Management

SMAttDeactPdpContextSgsnCC39U

The number of PDP Context Deactivation procedures initiated by the SGSN due to cause code#39, (reactivation requested, being sent to the MS).

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsnCC39.U

Source Section

Session Management

SMAttDeactPdpContextSgsnG

The number of PDP Context Deactivation procedures initiated by the SGSN. The counter is not incremented when re-sending Delete PDP Context Request to the GGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsn.G

Source Section

GPRS Session Management

SMAttDeactPdpContextSgsnU

Number of attempted PDP context deactivation procedures initiated by the SGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.AttDeactPdpContextSgsn.U

Source Section

Session Management

SMAttModPdpContextMsG

The number of attempted MS-initiated PDP Context Modifications procedures.

Data Source

SGSN

Source Field

SM.AttModPdpContextMs.G

Source Section

Session Management

SMAttModPdpContextMsU

The number of attempted MS-initiated PDP Context Modifications procedures.

Data Source

SGSN

Source Field

SM.AttModPdpContextMs.U

Source Section

Session Management

SMAttModPdpContextSgsnG

The number of attempted SGSN-Initiated PDP Context Modifications procedures.

Data Source

SGSN

Source Field

SM.AttModPdpContextSgsn.G

SMAttModPdpContextSgsnU

The number of attempted SGSN-Initiated PDP Context Modifications procedures.

Data Source

SGSN

Source Field

SM.AttModPdpContextSgsn.U

SMAttRabAssignment

The number of RAB assignment attempts. It is increased when a RAB Assignment Requests message with the information element Setup RAB is sent to the RNC.

Data Source

SGSN

Source Field

SM.AttRabAssignment

Source Section

Session Management

SMAttRabModPS

The number of attempted Radio Access Bearer (RAB) Modify Request procedures. It is incremented when a RAB Modify Request is received.

Data Source

SGSN

Source Field

SM.AttRabModPS

Source Section

Session Management

SMAttUpdPdpContextGgsnG

The number of attempted Gateway GPRS Support Node (GGSN)-Initiated PDP context update procedures. The counter is incremented when a QoS renegotiation is attempted. Applicable when the Operator QoS Control feature is activated.

Data Source

SGSN

Source Field

SM.AttUpdPdpContextGgsn.G

Source Section

Session Management

SMAttUpdPdpContextGgsnU

The number of attempted GGSN-Initiated PDP context update procedures. The counter is incremented when a QoS renegotiation is attempted. Applicable when the Operator QoS Control feature is activated.

Data Source

SGSN

Source Field

SM.AttUpdPdpContextGgsn.U

Source Section

Session Management

SMAttUpdPdpContextSgsnG

The number of attempted SGSN-Initiated PDP Context Update procedures

Data Source

SGSN

Source Field

SM.AttUpdPdpContextSgsn.G

SMAttUpdPdpContextSgsnU

The number of attempted SGSN-Initiated PDP Context Update procedures

Data Source

SGSN

Source Field

SM.AttUpdPdpContextSgsn.U

SMNbrActivePdpPerSgsnU

The number of mobile subscribers with activated PDP context (that is, subscribers that can send/receive GPRS packet data). The gauge is incremented when a subscriber activates the first context and decremented when the subscriber deactivates the last cont

Data Source

SGSN

Source Field

SM.NbrActivePdpPerSgsn.U

SMNbrActPdpContextU

Number of active PDP context.

Data Source

SGSN

Source Field

SM.NbrActPdpContext.U

SMNbrActSessions

This measurement provides the number of active MBMS sessions in this SGSN.

Data Source

SGSN

Source Field

SM.NbrActSessions

Source Section

MBMS

SMPdpContextsLostG

The number of PDP contexts lost due to a crash or restart, except for node restart and large restart. The measurement is collected and aggregated periodically. The accuracy may therefore be affected at repeated restarts.

Data Source

SGSN

Source Field

SM.PdpContextsLost.G

Source Section

Session Management

SMPdpContextsLostU

The number of PDP contexts lost due to a crash or restart, except for node restart and large restart. The measurement is collected and aggregated periodically. The accuracy may therefore be affected at repeated restarts.

Data Source

SGSN

Source Field

SM.PdpContextsLost.U

Source Section

Session Management

SMSAttMoPSG

The number of PS SMS Mobile Originating attempts.

Data Source

SGSN

Source Field

SMSAttMoPS.G

Source Section

Short Message Service

SMSAttMoPSU

The number of PS SMS Mobile Originating attempts.

Data Source

SGSN

Source Field

SMS.AttMoPS.U

SMSAttMtPSG

The number of PS SMS Mobile Terminating attempts.

Data Source

SGSN

Source Field

SMS.AttMtPS.G

Source Section

Short Message Service

SMSAttMtPSU

The number of PS SMS Mobile Terminating attempts.

Data Source

SGSN

Source Field

SMS.AttMtPS.U

SMSSuccMoPSG

The number of successful PS SMS Mobile Originating attempts.

Data Source

SGSN

Source Field

SMS.SuccMoPS.G

Source Section

Short Message Service

SMSSuccMoPSU

The number of successful PS SMS Mobile Originating attempts.

Data Source

SGSN

Source Field

SMS.SuccMoPS.U

SMSSuccMtPSG

The number of successful PS SMS Mobile Terminating attempts.

Data Source

SGSN

Source Field

SMS.SuccMtPS.G

Source Section

Short Message Service

SMSSuccMtPSU

The number of successful PS SMS Mobile Terminating attempts.

Data Source

SGSN

Source Field

SMS.SuccMtPS.U

SMSuccActPdpContextDynU

Number of successful dynamic PDP context activation procedures initiated by MS

Data Source

SGSN

Source Field

SM.SuccActPdpContextDyn.U

SMSuccActPdpContextSgsnHomeG

The number of successful PDP Context Activation procedures per SGSN for home subscribers. Home subscribers are defined by the roaming status parameter during the IMSI-series configuration

Data Source

SGSN

Source Field

SM.SuccActPdpContextSgsnHome.G

Source Section

Session Management

SMSuccActPdpContextSgsnHomeU

The number of successful PDP Context Activation procedures per SGSN for home subscribers. Home subscribers are defined by the roaming status parameter during the IMSI-series configuration

Data Source

SGSN

Source Field

SM.SuccActPdpContextSgsnHome.U

Source Section

Session Management

SMSuccActPdpContextU

Number of successful PDP context activation procedures initiated by MS

Data Source

SGSN

Source Field

SM.SuccActPdpContext.U

SMSuccActSecondPdpContextG

The number of successful secondary PDP context activations.

Data Source

SGSN

Source Field

SM.SuccActSecondPdpContext.G

Source Section

Session Management

SMSuccActSecondPdpContextU

The number of successful secondary PDP context activations.

Data Source

SGSN

Source Field

SM.SuccActSecondPdpContext.U

Source Section

Session Management

SMSuccDeactPdpContextGgsnG

Number of successfully handled PDP context deactivations initiated by the GGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextGgsn.G

Source Section

Session Management

SMSuccDeactPdpContextGgsnU

Number of successful PDP context deactivation procedures initiated by the GGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted.

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextGgsn.U

Source Section

Session Management

SMSuccDeactPdpContextMsG

This measurement provides the number of successfully completed PDP context deactivations. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextMs.G

Source Section

Session Management

SMSuccDeactPdpContextMsU

Number of successful PDP context deactivation procedures initiated by the MS. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextMs.U

Source Section

Session Management

SMSuccDeactPdpContextSgsnG

The number of successfully handled PDP Context Deactivation procedures initiated by the SGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextSgsn.G

Source Section

GPRS Session Management

SMSuccDeactPdpContextSgsnU

Number of successful PDP context deactivation procedures initiated by the SGSN. R7: The number of deactivated PDP contexts, and not deactivation procedures, are counted

Data Source

SGSN

Source Field

SM.SuccDeactPdpContextSgsn.U

Source Section

Session Management

SMSuccModPdpContextMsG

The number of successfully handled MS-Initiated PDP Context Modifications procedures.
These modifications are performed successfully

Data Source

SGSN

Source Field

SM.SuccModPdpContextMs.G

Source Section

Session Management

SMSuccModPdpContextMsU

The number of successfully handled MS-Initiated PDP context modifications procedures. These modifications are performed successfully when a Modify PDP Context Accept is sent to the MS.

Data Source

SGSN

Source Field

SM.SuccModPdpContextMs.U

Source Section

Session Management

SMSuccModPdpContextSgsnU

The number of successfully handled SGSN-Initiated PDP context modifications procedures. These modifications are performed successfully when a positive Modify PDP Context Accept is received from the MS.

Data Source

SGSN

Source Field

SM.SuccModPdpContextSgsn.U

SMSuccRabAssignment

The number of successful RAB assignments. It is increased when a RAB Assignment Response message is received indicating a successful RAB assignment.

Data Source

SGSN

Source Field

SM.SuccRabAssignment

Source Section

Session Management

SMSuccUpdPdpContextGgsnG

The number of successfully handled GGSN-Initiated PDP context update procedures. The counter is incremented when a QoS renegotiation has been performed.

Data Source

SGSN

Source Field

SM.SuccUpdPdpContextGgsn.G

Source Section

Session Management

SMSuccUpdPdpContextGgsnU

The number of successfully handled GGSN-Initiated PDP context update procedures. The counter is incremented when a QoS renegotiation has been performed.

Data Source

SGSN

Source Field

SM.SuccUpdPdpContextGgsn.U

Source Section

Session Management

SMSuccUpdPdpContextSgsnG

The number of successfully handled SGSN-initiated PDP Context Update procedures. These updates are performed successfully when a positive Update PDP Context response is received from the GGSN.

Data Source

SGSN

Source Field

SM.SuccUpdPdpContextSgsn.G

Source Section

GPRS Session Management

SMSuccUpdPdpContextSgsnU

The number of successfully handled SGSN-initiated PDP Context Update procedures. These updates are performed successfully when a positive Update PDP Context response is received from the GGSN.

Data Source

SGSN

Source Field

SM.SuccUpdPdpContextSgsn.U

SMUnsuccActPdpContextCamelG

This measurement provides the number of unsuccessful primary PDP context activation procedures per SGSN, due to PDP context activation denial, received from the gsmSCF. The counter is incremented when a CAMEL release message is received from the gsmSCF. This measurement type is indexed by either of the indexing options.

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCamel.G

Source Section

Session Management

SMUnsuccActPdpContextCamelU

This measurement provides the number of unsuccessful primary PDP context activation procedures per SGSN, due to PDP context activation denial, received from the gsmSCF. The counter is incremented when a CAMEL release message is received from the gsmSCF. This measurement type is indexed by either of the indexing options.

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCamel.U

Source Section

Session Management

SMUnsuccActPdpContextCC26G

The number of unsuccessful PDP Context procedures per SGSN due to cause code #26.

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC26.G

Source Section

GPRS Session Management

SMUnsuccActPdpContextCC26U

The number of unsuccessful PDP Context procedures per SGSN due to cause code #26 (Insufficient resources). The reject can be caused due to for example sustained high processor load on one or more GPBs handling signaling or if the hard limit for maximum nu

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC26.U

SMUnsuccActPdpContextCC27_28G

The number of unsuccessful PDP Context procedures per SGSN due to cause code #27 (Unknown or missing access point name) and cause code #28 (Unknown PDP address or PDP type). The counter is incremented when SGSN interrogates the DNS resolver and there is a

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC27_28.G

Source Section

GPRS Session Management

SMUnsuccActPdpContextCC27_28U

The number of unsuccessful PDP Context procedures per SGSN due to cause code #27 (Unknown or missing access point name) and cause code #28 (Unknown PDP address or PDP type). The counter is incremented when SGSN interrogates the DNS resolver and there is a

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC27_28.U

SMUnsuccActPdpContextCC29G

The number of unsuccessful PDP Context procedures per SGSN due to cause code #29 (User Authentication Failed). The counter is incremented if the request is rejected by GGSN (RADIUS).

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC29.G

Source Section

GPRS Session Management

SMUnsuccActPdpContextCC29U

The number of unsuccessful PDP Context procedures per SGSN due to cause code #29 (User Authentication Failed). The counter is incremented if the request is rejected by GGSN (RADIUS).

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC29.U

SMUnsuccActPdpContextCC32_33G

The number of unsuccessful PDP Context procedures per SGSN due to cause code #32 (Service option not supported) and cause code #33 (Requested Server Option not subscribed). The counter is incremented if the PDP type is not supported or NSAPI reserved or i

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC32_33.G

Source Section

GPRS Session Management

SMUnsuccActPdpContextCC32_33U

The number of unsuccessful PDP Context procedures per SGSN due to cause code #32 (Service option not supported) and cause code #33 (Requested Server Option not subscribed). The counter is incremented if the PDP type is not supported or NSAPI reserved or i

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC32_33.U

SMUnsuccActPdpContextCC38G

The number of unsuccessful PDP Context procedures per SGSN due to cause code #38 (Network failure).

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC38.G

Source Section

Session Management

SMUnsuccActPdpContextCC38U

The number of unsuccessful PDP Context procedures per SGSN due to cause code #38 (Network failure).

Data Source

SGSN

Source Field

SM.UnsuccActPdpContextCC38.U

Source Section

Session Management

SMUnsuccActPdpContextU

This measurement provides the number of unsuccessful primary PDP Context Activation procedures per SGSN. The counter is incremented when an Activate PDP Context Reject or a SM Status message is sent as a response if an Activate PDP Context Request is unsuccessful.

Data Source

SGSN

Source Field

SM.UnsuccActPdpContext.U

Source Section

Session Management

ss7_ADPI_MessageOrigUDT

The total number of unit data (UDT) messages originated per class and source (SCCP)

Data Source

SGSN

ss7_ADPI_MessageOrigXUDT

The total number of extended unit data (XUDT) mess origin per class and source (SCCP)

Data Source

SGSN

ss7_ADPI_MessageTermUDT

The total number of UDT messages terminated per class and sink (SCCP)

Data Source

SGSN

SS7_ADPI_MessageTermXUDT

The total number of XUDT messages, that are terminated (SCCP)

Data Source

SGSN

ss7_ADPI_MSUDiscardError

The message signalling unit (MSU) is discarded due to routing data error (MTP)

Data Source

SGSN

ss7_ADPI_ProtocolErrorComp

A protocol error is detected in component portion (TCAP)

Data Source

SGSN

ss7_ADPI_ProtocolErrorTraA

A protocol error has occurred since P-abort is unrec transac id (TID) (TCAP)

Data Source

SGSN

ss7_ADPI_ProtocolErrorTraD

A protocol error has occurred, since P-abort is unrecognized message type (TCAP)

Data Source

SGSN

ss7_ADPI_SLFailure

Signalling link (SL) failure is detected (MTP)

Data Source

SGSN

ss7_ADPI_SLRestoration

SL restoration has occurred (MTP)

Data Source

SGSN

ss7_ADPI_SPIInaccess

The adjacent signalling point (SP) is inaccessible (MTP)

Data Source

SGSN

ss7_ADPI_TCMessageReceive

The total number of TC messages received by the stack (TCAP)

Data Source

SGSN

ss7_ADPI_TCMessageSent

The total number of transaction capability (TC) messages sent by the stack (TCAP)

Data Source

SGSN

ss7AssocAvlForUP

The number of times associations are available for UP traffic.

Data Source

SGSN

Source Field

ss7AssocAvlForUP

Source Section

M3UA Management

ss7AssocUnavlForUP

The number of times associations are unavailable for User Part (UP) traffic.

Data Source

SGSN

Source Field

ss7AssocUnavlForUP

Source Section

M3UA Management

ss7MessageDiscardedOPCScreening

The number of discarded MSU packets received. The packets are discarded by the Originating Point Code (OPC) screening when the received OPC is not accepted. The ss7M3MSUDiscardedOPCScreening event includes both the received OPC and the adjacent DPC.

Data Source

SGSN

Source Field

ss7MessageDiscardedOPCScreening

Source Section

SS7 TCAP Layer

ss7MessageOrigUDT

The total number of unit data (UDT) messages originated per class and source.

Data Source

SGSN

Source Field

ss7MessageOrigUDT

Source Section

SS7 SCCP Layer

ss7MessageOrigXUDT

The total number of extended unit data (XUDT) messages originated per class and source.

Data Source

SGSN

Source Field

ss7MessageOrigXUDT

Source Section

SS7 SCCP Layer

ss7MessageTermUDT

The total number of UDT messages terminated per class and sink.

Data Source

SGSN

Source Field

ss7MessageTermUDT

Source Section

SS7 SCCP Layer

ss7MessageTermXUDT

The total number of XUDT messages, that are terminated.

Data Source

SGSN

Source Field

ss7MessageTermXUDT

Source Section

SS7 SCCP Layer

ss7MSUDiscardError

The message signaling unit (MSU) is discarded due to routing data error.

Data Source

SGSN

Source Field

ss7MSUDiscardError

Source Section

SS7 MTP Layer

ss7ProtocolErrorComp

A protocol error is detected in component portion.

Data Source

SGSN

Source Field

ss7ProtocolErrorComp

Source Section

SS7 TCAP Layer

ss7ProtocolErrorTraA

A protocol error has occurred, since P-abort is unrecognized transaction identity (TID).

Data Source

SGSN

Source Field

ss7ProtocolErrorTraA

Source Section

SS7 TCAP Layer

ss7ProtocolErrorTraD

A protocol error has occurred, since P-abort is unrecognized message type.

Data Source

SGSN

Source Field

ss7ProtocolErrorTraD

Source Section

SS7 TCAP Layer

ss7SLFailure

Retired fr 5.0.10.0.0-Signaling link (SL) failure is detected.

Data Source

SGSN

Source Field

ss7SLFailure

Source Section

SS7 MTP Layer

ss7SLRestoration

Retired fr 5.0.10.0.0-SL restoration has occurred.

Data Source

SGSN

Source Field

ss7SLRestoration

Source Section

SS7 MTP Layer

ss7SPInaccess

The adjacent signaling point (SP) is inaccessible.

Data Source

SGSN

Source Field

ss7SPInaccess

Source Section

SS7 MTP Layer

ss7TCMessageReceive

The total number of TC messages received by the stack.

Data Source

SGSN

Source Field

ss7TCMessageReceive

Source Section

SS7 TCAP Layer

ss7TCMessageSent

The total number of transaction capability (TC) messages sent by the stack.

Data Source

SGSN

Source Field

ss7TCMessageSent

Source Section

SS7 TCAP Layer

subscribersInTransitionalState

Gauge for Subscribers in Transitional State

Data Source

SGSN

Source Field

subscribersInTransitionalState

Source Section

ISP

succActPdpContextDynMsPerSgsn

Number of successfully completed PDP context activations where a dynamic PDP address is used.

Data Source

SGSN

Source Field

succActPdpContextDynMsPerSgsn

Source Section

GPRS Session Management

succActPdpContextMSPerSgsn

Number of successfully completed PDP context activations

Data Source

SGSN

Source Field

succActPdpContextMSPerSgsn

Source Section

GPRS Session Management

succAuthInSgsn

Number of successful authentication procedures within this SGSN area.

Data Source

SGSN

Source Field

succAuthInSgsn

Source Section

Security

succCombiAttach

The counter is incremented when sending Attach Accept indicating Combined GPRS/IMSI Attach to an MS

Data Source

SGSN

Source Field

succCombiAttach

Source Section

GPRS Mobility Management

succGprsAttach

The counter is incremented when sending Attach Accept indicating GPRS Only Attach to an MS

Data Source

SGSN

Source Field

succGprsAttach

Source Section

GPRS Mobility Management

succGprsAttachUmts

The number of successful GPRS attaches.

Data Source

SGSN

Source Field

succGprsAttachUmts

Source Section

Mobility Management

succGprsAttachVisitor

This measurement provides the number of successfully performed GPRS attach procedures within this SGSN area, initiated by visiting GPRS subscribers. Visiting subscribers are defined by the roaming status parameter in the IMSI number series configuration. If the SGSN resends an Attach Accept message to the MS, the counter is not incremented. If the SGSN receives an Attach Request message indicating Combined GPRS or IMSI Attach and the IMSI (CS) Attach did fail whereas the GPRS Attach was successful, the counter is not incremented.

Data Source

SGSN

Source Field

succGprsAttachVisitor

Source Section

Mobility Management

succGprsDetachSgsn

The counter is not incremented if Detach Accept is not received after the last re-transmission of Detach Request

Data Source

SGSN

Source Field

succGprsDetachSgsn

Source Section

GPRS Mobility Management

succGprsDetachSgsnUmts

The number of successful GPRS detaches initiated by the SGSN.

Data Source

SGSN

Source Field

succGprsDetachSgsnUmts

Source Section

Mobility Management

succIdentityReq

Incremented at reception of an Identity Response message with the requested identity for example IMSI and IMEI from the MS.

Data Source

SGSN

Source Field

succIdentityReq

Source Section

Security

succImsiAttach

The counter is incremented when sending Attach Accept indicating GPRS Attach while IMSI Attached to an MS

Data Source

SGSN

Source Field

succImsiAttach

Source Section

GPRS Mobility Management

succInterSgsnRaUpdate

The counter is incremented when receiving RA Update Complete from an MS

Data Source

SGSN

Source Field

succInterSgsnRaUpdate

Source Section

GPRS Mobility Management

succInterSgsnRaUpdateUmts

The number of successful inter-SGSN RA updates.

Data Source

SGSN

Source Field

succInterSgsnRaUpdateUmts

Source Section

Mobility Management

succInterSgsnRaUpdateVisitor

This measurement provides the number of successfully completed inter-SGSN RAU procedures initiated by visiting GPRS subscribers within this SGSN area. Visiting subscribers are defined by the roaming status parameter in the IMSI number series configuration.

Data Source

SGSN

Source Field

succInterSgsnRaUpdateVisitor

Source Section

Mobility Management

succIntraSgsnRaUpdate

The counter is incremented when sending RA Update Accept to an MS. The counter is not stepped when re-sending RA Update Accept to the MS

Data Source

SGSN

Source Field

succIntraSgsnRaUpdate

Source Section

GPRS Mobility Management

succIntraSgsnRaUpdateUmts

The number of successful intra-SGSN RA update procedures.

Data Source

SGSN

Source Field

succIntraSgsnRaUpdateUmts

Source Section

Mobility Management

succPacketSwitchingPagingUmts

The number of successful PS paging procedures.

Data Source

SGSN

Source Field

succPacketSwitchingPagingUmts

Source Section

Mobility Management

succReqAuthSetsHlr

Number of successful requests for authentication sets that were sent from the HLR to the SGSN.

Data Source

SGSN

Source Field

succReqAuthSetsHlr

Source Section

Security

unsuccGprsAttachUmts

The number of unsuccessful GPRS attach requests, that is, the number of reject messages sent.

Data Source

SGSN

Source Field

unsuccGprsAttachUmts

Source Section

Mobility Management

unsuccPacketSwitchingPaging

Number of unsuccessful packet switched paging (GPRS) procedures within this SGSN area.
R7: The measurement type is now changed to a supervised counter. Supervision is true by default.

Data Source

SGSN

Source Field

unsuccPacketSwitchingPaging

Source Section

Radio Resource Management

unsuccPacketSwitchPagingUmts

The number of unsuccessful PS paging procedures.

Data Source

SGSN

Source Field

unsuccPacketSwitchingPagingUmts

Source Section

Mobility Management

uplinkSndcpNpduReceived

The number of incoming N-PDUs received by the SMDCP protocol layer.

Data Source

SGSN

Source Field

uplinkSndcpNpduReceived

Source Section

SMDCP

uplinkSndcpOctetReceivedMode

The number of octets in incoming N-PDUs received by the SMDCP protocol layer (kOctets, 1024 octets)

Data Source

SGSN

Source Field

uplinkSndcpOctetReceivedMode

Source Section

SNDP

GSN_MM_Index Primitive Calculations

The following is a list of primitive calculations for the GSN_MM_Index entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

GSN_MM_Index Peg Counts

The following is a list of peg counts for the GSN_MM_Index entity.

AttGprsAttachG

Number of attempted GPRS attach procedures initiated within this SGSN area

Data Source

SGSN

Source Field

MM.AttGprsAttach.G

Source Section

Mobility Management for GSN

AttGprsDetachMsG

Number of MS initiated GPRS detach procedures within this SGSN area

Data Source

SGSN

Source Field

MM.AttGprsDetachMs.G

Source Section

Mobility Management for GSN

AttInterSgsnRaUpdateG

Number of attempted inter-SGSN Routing Area Update procedures initiated in this SGSN

Data Source

SGSN

Source Field

MM.AttInterSgsnRaUpdate.G

Source Section

Mobility Management for GSN

AttIntraSgsnRaUpdateG

Number of attempted Intra-SGSN Routing Area Update procedures initiated within this SGSN area

Data Source

SGSN

Source Field

MM.AttIntraSgsnRaUpdate.G

Source Section

Mobility Management for GSN

collectionPeriod

Collection period in seconds

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

MMAttCombiInterSgsnRaUpdateG

The number of combined RA/LA updates (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttCombiInterSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMAttCombiIntraSgsnRaUpdateG

The number of combined RA/LA updates (intra-SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttCombiIntraSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMAttGprsAttachU

Attempted GPRS attach procedures initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.AttGprsAttach.U

MMAttGprsDetachMsU

Number of attempted GPRS detach procedures initiated by MS in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.AttGprsDetachMs.U

MMAttGprsDetachSgsnG

The number of attempted GPRS detach procedures initiated by SGSN.

Data Source

SGSN

Source Field

MM.AttGprsDetachSgsn.G

MMAttGprsDetachSgsnU

Number of attempted GPRS detach procedures initiated by SGSN (R5.5)

Data Source

SGSN

Source Field

MM.AttGprsDetachSgsn.U

MMAttImsiCombiInterSgsnRAUpdaG

The number of combined RA/LA updates with IMSI attach (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttImsiCombiInterSgsnRAUpdate.G

Source Section

Mobility Management Indexing

MMAttImsiCombiIntraSgsnRAUpdaG

The number of combined RA/LA updates with IMSI attach (intra SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.AttImsiCombiIntraSgsnRAUpdate.G

Source Section

Mobility Management Indexing

MMAttInterSgsnRaUpdateU

No of att inter-SGSN Routing Area Update procedures initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.AttInterSgsnRaUpdate.U

MMAttIntraSgsnRaUpdateU

Attempted intra-SGSN Routing Area Update procedures initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.AttIntraSgsnRaUpdate.U

MMAttNormalIntraSgsnRaUpdateG

The number of attempted normal intra-SGSN RA Update procedures initiated in this SGSN. Periodic RA updates are not counted. Resending from MSs are also counted.

Data Source

SGSN

Source Field

MM.AttNormalIntraSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMAttNormalIntraSgsnRaUpdateU

The number of attempted normal intra-SGSN RA Update procedures initiated in this UMTS SGSN. Periodic RA updates are not counted. Resending from MSs are also counted.

Data Source

SGSN

Source Field

MM.AttNormalIntraSgsnRaUpdate.U

Source Section

Mobility Management Indexing

MMAttPsPagingProcGb

The total number of Packet-Switched (PS) paging procedures that are initiated at the SGSN, over the Gb interface. A paging procedure means that the counter is incremented once when sending the first set of paging (that is 3 paging messages with new P-TMSI

Data Source

SGSN

Source Field

MM.AttPsPagingProcGb

Source Section

Mobility Management Indexing

MMAttPsPagingProcIu

The total number of PS paging procedures that are initiated at the SGSN, over the Iu interface. A paging procedure means that the counter is incremented once when sending the first set of paging (that is 3 paging messages with new P-TMSI and possibly 2 pa

Data Source

SGSN

Source Field

MM.AttPsPagingProcIu

Source Section

Mobility Management Indexing

MMNbrActAttachedSubRAG

The number of attached subscribers per RA within this SGSN. Default Alarm Triggering Level: 90% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: 85% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: True

Data Source

SGSN

Source Field

MM.NbrActAttachedSubRA.G

Source Section

Mobility Management Indexing

MMNbrActAttachedSubRAU

The number of attached subscribers per RA within this SGSN. Default Alarm Triggering Level: 90% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Default Alarm Clearing Level: 85% of the limit for attached subscribers depending on HW and the size of the scalable SGSN. Severity: Minor Default Supervision Active: False

Data Source

SGSN

Source Field

MM.NbrActAttachedSubRA.U

Source Section

Mobility Management Indexing

MMSuccCombiInterSgsnRaUpdateG

The number of successfully performed combined RA/LA updates (inter SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.SuccCombiInterSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMSuccCombiIntraSgsnRaUpdateG

The number of successfully performed combined RA/LA updates (intra SGSN) procedures initiated in the SGSN.

Data Source

SGSN

Source Field

MM.SuccCombiIntraSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMSuccFirstPsPagingGb

The number of successful first paging messages in the Packet-Switched (PS) paging procedure.

Data Source

SGSN

Source Field

MM.SuccFirstPsPagingGb

Source Section

Mobility Management

MMSuccGprsAttachU

Successful GPRS attach procedures initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.SuccGprsAttach.U

MMSuccGprsDetachSgsnG

The number of successfully completed SGSN-initiated GPRS detach procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.SuccGprsDetachSgsn.G

Source Section

Mobility Management Indexing

MMSuccGprsDetachSgsnU

The number of successfully completed SGSN-initiated GPRS detach procedures within this SGSN area.

Data Source

SGSN

Source Field

MM.SuccGprsDetachSgsn.U

Source Section

Mobility Management Indexing

MMSuccInterSgsnRaUpdateU

No of succ comp inter-SGSN Routing Area Update Proc initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.SuccInterSgsnRaUpdate.U

MMSuccIntraSgsnRaUpdateU

Successful intra-SGSN Routing Area Update procedure initiated in this SGSN area (R5.5)

Data Source

SGSN

Source Field

MM.SuccIntraSgsnRaUpdate.U

MMSuccNormalIntraSgsnRaUpdateG

The number of successfully performed normal intra-SGSN Routing Area Update procedures initiated in this SGSN. Periodic RA Updates and RA Updates acting as resume of a suspended MS are not counted. The counter is not stepped when resending RA Update Accept to the MS.

Data Source

SGSN

Source Field

MM.SuccNormalIntraSgsnRaUpdate.G

Source Section

Mobility Management Indexing

MMSuccNormalIntraSgsnRaUpdateU

The number of successfully performed normal intra-SGSN RA Update procedures initiated in this SGSN. Periodic RA updates and RA updates acting as resume of a suspended MS are not counted. The counter is not stepped when resending RA Update Accept to the MS.

Data Source

SGSN

Source Field

MM.SuccNormalIntraSgsnRaUpdate.U

Source Section

Mobility Management Indexing

MMSuccPsPagingProcGb

The total number of successful PS paging procedures that are initiated at the SGSN, over the Gb interface.

Data Source

SGSN

Source Field

MM.SuccPsPagingProcGb

MMSuccPsPagingProcIu

The total number of successful PS paging procedures that are initiated at the SGSN, over the Iu interface.

Data Source

SGSN

Source Field

MM.SuccPsPagingProcIu

SuccGprsAttachG

Number of successfully performed GPRS attach procedures within this SGSN area

Data Source

SGSN

Source Field

MM.SuccGprsAttach.G

Source Section

Mobility Management for GSN

SuccInterSgsnRaUpdateG

Number of successfully completed inter-SGSN Routing Area Update procedures in this SGSN

Data Source

SGSN

Source Field

MM.SuccInterSgsnRaUpdate.G

Source Section

Mobility Management for GSN

SuccIntraSgsnRaUpdateG

Number of successfully performed Intra-SGSN Routing Area Update procedures initiated in this SGSN

Data Source

SGSN

Source Field

MM.SuccIntraSgsnRaUpdate.G

Source Section

Mobility Management for GSN

GSN_OvrProtect Primitive Calculations

The following is a list of primitive calculations for the GSN_OvrProtect entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

GSN_OvrProtect Peg Counts

The following is a list of peg counts for the GSN_OvrProtect entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

gsnOverloadProtectionSs7MessageReject

The counter is incremented when an outgoing request through SS7 link is rejected. SCCP messages are discarded. TCAP messages are rejected with reject message

Data Source

SGSN

Source Field

gsnOverloadProtectionSs7MessageReject

Source Section

GSN Overload Protection

GSNRelease

Release of GSN

Data Source

SGSN

GSN_SM_Index Primitive Calculations

The following is a list of primitive calculations for the GSN_SM_Index entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

GSN_SM_Index Peg Counts

The following is a list of peg counts for the GSN_SM_Index entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

Source Field

granularity period (gp)

GSNRelease

Release of GSN

Data Source

SGSN

Source Field

showelements.Release

SMAAttActPdpContextRaG

The number of attempted primary PDP context activation procedures per RA within the SGSN.

Data Source

SGSN

Source Field

SM.AttActPdpContextRa.G

Source Section

Session Management

SMSuccActPdpContextRaG

The number of successfully completed primary PDP context activations per RA within the SGSN.

Data Source

SGSN

Source Field

SM.SuccActPdpContextRa.G

Source Section

Session Management

GSNTType Primitive Calculations

The following is a list of primitive calculations for the GSNTType entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt()

Interface Primitive Calculations

The following is a list of primitive calculations for the Interface entity.

ATMAAL5LenErrPkts

Ratio of packets dropped because their length was incorrect to total dropped Packets in percent

Calculation

```
( jnxAtmIfInLenErrPkts * 100.0 ) / ( 1.0 * vsum( jnxAtmIfInNoBufDropPkts,  
jnxAtmIfOutVCQueueDrops, jnxAtmIfInNoBufDropPkts, jnxAtmIfInLenErrPkts )  
)
```

ATMAAL5NoBufDropPktsRate

Ratio of packets dropped because there was no enough buffer to handle them to total dropped Packets in percent

Calculation

```
( jnxAtmIfInNoBufDropPkts * 100.0 ) / ( 1.0 * vsum( jnxAtmIfInNoBufDropPkts, jnxAtmIfOutVCQueueDrops, jnxAtmIfInNoBufDropPkts, jnxAtmIfInLenErrPkts ) )
```

ATMAAL5TimeoutPkts

Ratio of packets dropped because reassembly timeout to total dropped Packets in percent

Calculation

```
( jnxAtmIfInTimeoutPkts * 100.0 ) / ( 1.0 * vsum( jnxAtmIfInTimeoutPkts, jnxAtmIfInNoBufDropPkts, jnxAtmIfOutVCQueueDrops, jnxAtmIfInNoBufDropPkts, jnxAtmIfInLenErrPkts ) )
```

ATMAAL5VCQueueDropsPktsRate

Ratio of packets dropped because of queue limits on each VC to total dropped Packets in percent

Calculation

```
( jnxAtmIfOutVCQueueDrops * 100.0 ) / ( 1.0 * vsum( jnxAtmIfInNoBufDropPkts, jnxAtmIfOutVCQueueDrops, jnxAtmIfInNoBufDropPkts, jnxAtmIfInLenErrPkts ) )
```

ATMavgPktsSizeIn

Ratio of the number of bytes received to number of packets on this VC

Calculation

```
AGGR(VirtualPath.VirtualChannel, jnxAtmVCInBytes) / AGGR(VirtualPath.VirtualChannel, jnxAtmVCInPkts)
```

ATMavgPktsSizeOut

Ratio of the number of bytes Transmitted to number of packets on this VC

Calculation

```
AGGR(VirtualPath.VirtualChannel, jnxAtmVCOutBytes) / AGGR(VirtualPath.VirtualChannel, jnxAtmVCOutPkts)
```

ATMHeaderCheckSeqCorrRate

ATM Cell Header Check Correction Rate is the Ratio between the number of correctable cell Header Check Sequence (HCS) Errors and the sum of correctable and uncorrectable HCS Errors that occurred in Percent.

Calculation

$$(\text{jnxAtmIfCorrHCSErrs} * 100.0) / (1.0 * \text{vsum} (\text{jnxAtmIfCorrHCSErrs}, \text{jnxAtmIfUncorrHCSErrs}))$$

ATMHeaderCheckUnCorrErrRate

ATM Cell Header Check Uncorrectable Error Rate is the ratio Between the number Cells with uncorrectable HCS errors to total number of received Cells

Calculation

$$(\text{jnxAtmIfUncorrHCSErrs} * 100.0) / (1.0 * \text{jnxAtmIfRxCellCount})$$

ATMIdleCellRate

ATM Idle Cell rate is the ratio between number of Idle Cells and total number of transmited Cells in Procent . This is an indication of Utilization. Beacause when the Interface has noting to send It sends Idle Cells.

Calculation

$$(\text{jnxAtmIfTxIdleCellCount} * 100.0) / (1.0 * \text{jnxAtmIfTxCellCount})$$

ATMNoBufferOAMFailRate

ATM No Buffer OAM Failure Rate is the ratio between dopped OAM and raw cells to total

Calculation

$$(\text{jnxAtmIfInNoBufferOAMCells} * 100.0) / (1.0 * \text{jnxAtmIfRxCellCount})$$

ATMOverrunFIFORecieveRate

ATM Overrun FIFO Recieve Rate is the ratio Output FIFO Overruns and total Transmit cells in procent. Input errors indicating that the input queue overflowed while copying received cells.

Calculation

$$(\text{jnxAtmIfRxCellFIFOOverRuns} * 100.0) / (1.0 * \text{jnxAtmIfRxCellCount})$$

ATMOverrunFIFOTransmitRate

ATM Overrun FIFO Transmit Rate is the ratio Output FIFO Overruns and total Transmit cells in procent are output errors indicating that the Output queue overflowed while copying received frames.

Calculation

$$(\text{jnxAtmIfTxCellFIFOOverRuns} * 100.0) / (1.0 * \text{jnxAtmIfTxCellCount})$$

ATMTOTALAAL5PacketsDropped

Total Number of AAL5 Dropped because of reassembly timeout,length was incorrect,queue limits on each VC, ,no enough buffer to handle them.

Calculation

```
( vsum (jnxAtmIfInNoBufDropPkts, jnxAtmIfOutVCQueueDrops, jnxAtmIfInNo-  
BufDropPkts, jnxAtmIfInLenErrPkts ) )
```

ATMUnderrunFIFORecieveRate

ATM Underrun FIFO Receive rate is the rate that the transmitter has been running faster than the interface can handle.

Calculation

```
( jnxAtmIfRxCellFIFOUnderRuns * 100.0 ) / ( 1.0 * jnxAtmIfRxCellCount)
```

ATMVCTailQueuePktDropRate

Ratio of the number of packets dropped due to bandwidth constraints to total Packets Out on this VC in Percent. This is an Indication that packets were queued to send out at a rate faster than allowed.

Calculation

```
AGGR(VirtualPath.VirtualChannel, jnxAtmVCTailQueuePktDrops) * 100.0 /  
AGGR(VirtualPath.VirtualChannel, jnxAtmVCOutPkts)
```

ATMVirtuConnecFailRate

ATM Virtual Connection Failure rate is ratio of cells that received with no existing virtual connection to the total number of Received Packets.

Calculation

```
( jnxAtmIfInInvalidVCCells * 100.0 ) / ( 1.0 * jnxAtmIfRxCellCount )
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IfAccuracy

Interface accuracy can be expressed by the ratio of the packets that does not result in an error to the total packets

Calculation

```
( vsum (100, -1 * jnxifInErrors * 100.0) ) / ( 1.0 * vsum( jnxifInUcastP-  
kts, jnxifInMulticastPkts, jnxifInBroadcastPkts) )
```

ifInDiscardRate

Rate of incoming packets discarded on an interface

Calculation

```
( jnxifInDiscards * 100.0 ) / ( 1.0 * vsum(jnxifInUcastPkts, jnxifInMulti-  
castPkts, jnxifInBroadcastPkts, jnxifInDiscards, jnxifInErrors, jnxifInUn-  
knownProtos) )
```

ifInErrorsRate

Ratio of incoming errored packets to total packets

Calculation

```
( jnxifInErrors * 100.0 ) / ( 1.0 * vsum(jnxifInUcastPkts, jnxifInMulti-  
castPkts, jnxifInBroadcastPkts, jnxifInDiscards, jnxifInErrors, jnxifInUn-  
knownProtos) )
```

ifInPkts

The total nr of packets, delivered by this sub-layer to a higher (sub-)layer (All CPUs)

Calculation

```
vsum(ifInPkts_CPU2, ifInPkts_CPU3, ifInPkts_CPU4)
```

ifOutDiscardRate

Rate of outgoing packets discarded on an interface

Calculation

```
( jnxifOutDiscards * 100.0 ) / ( 1.0 * vsum(jnxifOutUcastPkts, jnxifOutMul-  
ticastPkts, jnxifOutBroadcastPkts, jnxifOutDiscards, jnxifOutErrors, jnxi-  
fInUnknownProtos) )
```

ifOutErrorsRate

Rate of outgoing errored packets

Calculation

```
( jnxifOutErrors * 100.0 ) / ( vsum( jnxifOutUcastPkts, jnxifOutMulticast-  
Pkts, jnxifOutBroadcastPkts, jnxifOutDiscards, jnxifOutErrors) )
```

ifOutPkts

The total nr of packets that higher-level protocols requested to be transmitted (All CPUs)

Calculation

```
vsum(ifOutPkts_CPU2, ifOutPkts_CPU3, ifOutPkts_CPU4)
```

InterfaceBalance_GSN

Interface balance outgoing divided by incoming traffic %

Calculation

$$\frac{(\text{ifOutOctets_CPU2} + \text{ifOutOctets_CPU3} + \text{ifOutOctets_CPU4}) * 100.0}{(\text{ifInOctets_CPU2} + \text{ifInOctets_CPU3} + \text{ifInOctets_CPU4})}$$

InterfaceGOS

Dimensioned Grade of Service

Calculation

InterfaceThrouputRx

Interface input is the total number of octets transmitted out of the interface, including framing characters in 15 minutes in Kbytes/s

Calculation

$$(\text{ifInOctets} * 1.0) / (\text{collectionPeriod} * 60.0)$$

InterfaceThrouputRx_GSN

Interface input is the total number of octets/s transmitted out of the interface

Calculation

$$\frac{(\text{ifInOctets_CPU2} + \text{ifInOctets_CPU3} + \text{ifInOctets_CPU4})}{(\text{collectionPeriod} * 1.0)}$$

InterfaceThrouputTx

Interface output of interface is the total number of octets transmitted out of the interface, including framing characters in 15 minutes in Kbytes/s

Calculation

$$(\text{ifOutOctets} * 1.0) / (\text{collectionPeriod} * 60.0)$$

InterfaceThrouputTx_GSN

Interface outp of interface is the tot nr of octets/s transm out of the interface

Calculation

$$\frac{(\text{ifOutOctets_CPU2} + \text{ifOutOctets_CPU3} + \text{ifOutOctets_CPU4})}{(\text{collectionPeriod} * 1.0)}$$

NUMDAYS

of days in Report

Calculation

$$\text{DAYSINREPORT}()$$

NUMHOURS

of hours in Summation Data

Calculation

PacketDiscardRate_GSN

Packet Discard Rate shows the ratio of discarded packets %

Calculation

$$\frac{(\text{ifOutDiscards_CPU2} + \text{ifOutDiscards_CPU3} + \text{ifOutDiscards_CPU4}) * 100.0}{(\text{ifOutPkts_CPU2} + \text{ifOutPkts_CPU3} + \text{ifOutPkts_CPU4})}$$

pInUtilization

Interface Utilization is an indication of the general performance of the interface.

Calculation

$$\text{ifOutOctets} * 100.0 / \text{ifInOctets}$$

pPktDis

Packet Discard Rate shows the ratio of discarded packets to delivered packets.

Calculation

$$\frac{(\text{ifOutDiscards} * 100.0)}{\text{vsum}(\text{ifInUcastPkts}, \text{ifInPkts_CPU2}, \text{ifInPkts_CPU3}, \text{ifInPkts_CPU4}, -1 * \text{ifOutDiscards}, -1 * \text{ifOutQlen})}$$

pPktQue

Packet Queued Rate shows the ratio of queued packets to delivered packets.

Calculation

$$\frac{(\text{ifOutQlen} * 100.0)}{\text{vsum}(\text{ifInUcastPkts}, \text{ifInPkts_CPU2}, \text{ifInPkts_CPU3}, \text{ifInPkts_CPU4}, -1 * \text{ifOutDiscards}, -1 * \text{ifOutQlen})}$$

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

$$\text{nullInt}()$$

Interface Peg Counts

The following is a list of peg counts for the Interface entity.

collectionPeriod

GPRS General

Data Source

SGSN

collectionPeriod_SNMP_GGSN

Period Length

Data Source

GGSN

Source Field

collectionPeriod_SNMP_GGSN

Source Section

Interface General

filterIpssecPackets_IPSecFilter_in_21

Number of packets classified as IPsec by filter, type 5 in.

Data Source

SGSN

Source Field

filterIpssecPackets

Source Section

IP Filtering Interface/SA

filterIpssecPackets_IPSecFilter_out_21

Number of packets classified as IPsec by filter, type 5 out.

Data Source

SGSN

Source Field

filterIpssecPackets

Source Section

IP Filtering Interface/SA

filterIpsecPackets_normalFilter_in_21

Number of packets classified as IPsec by filter, type 2 in.

Data Source

SGSN

Source Field

filterIpsecPackets

Source Section

IP Filtering Interface/SA

filterIpsecPackets_normalFilter_out_21

Number of packets classified as IPsec by filter, type 2 out.

Data Source

SGSN

Source Field

filterIpsecPackets

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_IPSecFilter_in_21

Number of packets allowed by filter, type 5 in.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_IPSecFilter_out_21

Number of packets allowed by filter, type 5 out.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_normalFilter_in_21

Number of packets allowed by filter, type 2 in.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsAllowed_normalFilter_out_21

Number of packets allowed by filter, type 2 out.

Data Source

SGSN

Source Field

filterPacketsAllowed

Source Section

IP Filtering Interface/SA

filterPacketsDenied_IPSecFilter_in_21

Number of packets denied by filter, type 5 in.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

filterPacketsDenied_IPSecFilter_out_21

Number of packets denied by filter, type 5 out.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

filterPacketsDenied_normalFilter_in_21

Number of packets denied by filter, type 2 in.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

filterPacketsDenied_normalFilter_out_21

Number of packets denied by filter, type 2 out.

Data Source

SGSN

Source Field

filterPacketsDenied

Source Section

IP Filtering Interface/SA

GSNRelease

Release of GSN

Data Source

SGSN

ifChassisChannel

The channel identifier for the specified interface if and only if it is part of a channelized interface. For the interface which could not be channelized, this object returns zero.

Data Source

GGSN

Source Field

ifChassisChannel

Source Section

ifChassisEntry

ifChassisLogicalUnit

The logical unit number of the specified interface.

Data Source

GGSN

Source Field

ifChassisLogicalUnit

Source Section

ifChassisEntry

ifInDiscards

The number of inbound IP packets dropped in the Ethernet driver due to lack of resources.

Data Source

SGSN

Source Field

ifInDiscards

Source Section

IP Interface

ifInOctets

The total number of octets received on the interface, including framing characters.

Data Source

SGSN

Source Field

ifInOctets

Source Section

IP Interface

ifInOctets_CPU2

The total number of octets received on the interface, including framing characters, cpu 2.

Data Source

SGSN

Source Field

ifInOctets

Source Section

IP Interface

ifInOctets_CPU3

The total number of octets received on the interface, including framing characters, cpu 3.

Data Source

SGSN

Source Field

ifInOctets

Source Section

IP Interface

ifInOctets_CPU4

The total number of octets received on the interface, including framing characters, cpu 4.

Data Source

SGSN

Source Field

ifInOctets

Source Section

IP Interface

ifInPkts_CPU2

The total number of packets, delivered by this sub-layer to a higher (sub-)layer, cpu 2.

Data Source

SGSN

Source Field

ifInPkts

Source Section

IP Interface

ifInPkts_CPU3

The total number of packets, delivered by this sub-layer to a higher (sub-)layer, cpu 3.

Data Source

SGSN

Source Field

ifInPkts

Source Section

IP Interface

ifInPkts_CPU4

The total number of packets, delivered by this sub-layer to a higher (sub-)layer, cpu 4.

Data Source

SGSN

Source Field

ifInPkts

Source Section

IP Interface

ifInUcastPkts

The total number of packets, delivered by this sub-layer to a higher (sub-)layer.

Data Source

SGSN

Source Field

ifInUcastPkts

Source Section

IP Interface

ifOutDiscards

The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted. R7: The number of outbound packets dropped in the Ethernet driver due to lack of resources

Data Source

SGSN

Source Field

ifOutDiscards

Source Section

IP Interface

ifOutDiscards_CPU2

The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted, cpu 2.

Data Source

SGSN

Source Field

ifOutDiscards

Source Section

IP Interface

ifOutDiscards_CPU3

The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted, cpu 3.

Data Source

SGSN

Source Field

ifOutDiscards

Source Section

IP Interface

ifOutDiscards_CPU4

The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted, cpu 4.

Data Source

SGSN

Source Field

ifOutDiscards

Source Section

IP Interface

ifOutOctets

The total number of octets transmitted out of the interface, including framing characters.

Data Source

SGSN

Source Field

ifOutOctets

Source Section

IP Interface

ifOutOctets_CPU2

The total number of octets transmitted out of the interface, including framing characters, cpu 2.

Data Source

SGSN

Source Field

ifOutOctets

Source Section

IP Interface

ifOutOctets_CPU3

The total number of octets transmitted out of the interface, including framing characters, cpu 3.

Data Source

SGSN

Source Field

ifOutOctets

Source Section

IP Interface

ifOutOctets_CPU4

The total number of octets transmitted out of the interface, including framing characters, cpu 4.

Data Source

SGSN

Source Field

ifOutOctets

Source Section

IP Interface

ifOutPkts_CPU2

The total number of packets that higher-level protocols requested to be transmitted, cpu 2.

Data Source

SGSN

Source Field

ifOutPkts

Source Section

IP Interface

ifOutPkts_CPU3

The total number of packets that higher-level protocols requested to be transmitted, cpu 3.

Data Source

SGSN

Source Field

ifOutPkts

Source Section

IP Interface

ifOutPkts_CPU4

The total number of packets that higher-level protocols requested to be transmitted, cpu 4.

Data Source

SGSN

Source Field

ifOutPkts

Source Section

IP Interface

ifOutQlen

The length of the output packet queue (in packets).

Data Source

SGSN

Source Field

ifOutQlen

Source Section

IP Interface

ifOutQlen_CPU2

The length of the output packet queue (in packets), cpu 2.

Data Source

SGSN

Source Field

ifOutQlen

Source Section

IP Interface

ifOutQlen_CPU3

The length of the output packet queue (in packets), cpu 3.

Data Source

SGSN

Source Field

ifOutQlen

Source Section

IP Interface

ifOutQlen_CPU4

The length of the output packet queue (in packets), cpu 4.

Data Source

SGSN

Source Field

ifOutQlen

Source Section

IP Interface

ifOutUcastPkts

The total number of packets that higher-level protocols requested to be transmitted.

Data Source

SGSN

Source Field

ifOutUcastPkts

Source Section

IP Interface

jnxAtmIfCorrHCSErrs

The number of correctable cell Header Check Sequence (HCS) Errors that occurred.

Data Source

GGSN

Source Field

jnxAtmIfCorrHCSErrs

Source Section

jnxAtmIfEntry

jnxAtmIfInBadCrcs

The total number of incoming CRC errors.

Data Source

GGSN

Source Field

jnxAtmIfInBadCrcs

Source Section

jnxAtmIfEntry

jnxAtmIfInInvalidVCCells

The number of Cells that arrived for non existent VC.

Data Source

GGSN

Source Field

jnxAtmIfInInvalidVCCells

Source Section

jnxAtmIfEntry

jnxAtmIfInLenErrPkts

The number of AAL5 packets dropped because their length was incorrect.

Data Source

GGSN

Source Field

jnxAtmIfInLenErrPkts

Source Section

jnxAtmIfEntry

jnxAtmIfInNoBufDropPkts

The number of AAL5 packets dropped because there was no enough buffer to handle them.

Data Source

GGSN

Source Field

jnxAtmIfInNoBufDropPkts

Source Section

jnxAtmIfEntry

jnxAtmIfInNoBufferOAMCells

The number of received OAM cells or raw cells dropped because no buffers were available to handle them.

Data Source

GGSN

Source Field

jnxAtmIfInNoBufferOAMCells

Source Section

jnxAtmIfEntry

jnxAtmIfInTimeoutPkts

The number of AAL5 packets dropped because of reassembly timeout.

Data Source

GGSN

Source Field

jnxAtmIfInTimeoutPkts

Source Section

jnxAtmIfEntry

jnxAtmIfOutVCQueueDrops

The number of packets dropped because of queue limits on each VC.

Data Source

GGSN

Source Field

jnxAtmIfOutVCQueueDrops

Source Section

jnxAtmIfEntry

jnxAtmIfRxCellCount

The number of ATM cells received by the interface.

Data Source

GGSN

Source Field

jnxAtmIfRxCellCount

Source Section

jnxAtmIfEntry

jnxAtmIfRxCellFIFOOverRuns

The number of overruns in the Receive FIFO.

Data Source

GGSN

Source Field

jnxAtmIfRxCellFIFOOverRuns

Source Section

jnxAtmIfEntry

jnxAtmIfRxCellFIFOUnderRuns

The number of underruns in the receive FIFO.

Data Source

GGSN

Source Field

jnxAtmIfRxCellFIFOUnderRuns

Source Section

jnxAtmIfEntry

jnxAtmIfTxCellCount

The number of ATM cells transmitted by the interface.

Data Source

GGSN

Source Field

jnxAtmIfTxCellCount

Source Section

jnxAtmIfEntry

jnxAtmIfTxCellFIFOOverRuns

The number of overruns in the Transmit FIFO.

Data Source

GGSN

Source Field

jnxAtmIfTxCellFIFOOverRuns

Source Section

jnxAtmIfEntry

jnxAtmIfTxIdleCellCount

The number of idle cells sent by the port.

Data Source

GGSN

Source Field

jnxAtmIfTxIdleCellCount

Source Section

jnxAtmIfEntry

jnxAtmIfUncorrHCSErrs

The number of uncorrectable cell Header Check Sequence (HCS) Errors that occurred.

Data Source

GGSN

Source Field

jnxAtmIfUncorrHCSErrs

Source Section

jnxAtmIfEntry

jnxifAdminStatus

The desired state of the interface

Data Source

GGSN

Source Field

ifAdminStatus

Source Section

ifEntry

jnxifHCIn1SecRate

The number of bits per second (bps), delivered by this (sub-)layer to its next higher (sub-)layer.

Data Source

GGSN

Source Field

ifHCIn1SecRate

Source Section

ifJnxEntry

jnxifHCInBroadcastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCInBroadcastPkts

Source Section

ifXEntry

jnxifHCInMulticastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a multicast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCInMulticastPkts

Source Section

ifXEntry

jnxifHCInOctets

The total number of octets received on the interface, including framing characters.

Data Source

GGSN

Source Field

ifHCInOctets

Source Section

ifXEntry

jnxifHCInUcastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were not addressed to a multicast or broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCInUcastPkts

Source Section

ifXEntry

jnxifHCOut1SecRate

The number of bits per second (bps), delivered by this (sub-)layer to its next lower (sub-)layer.

Data Source

GGSN

Source Field

ifHCOut1SecRate

Source Section

ifJnxEntry

jnxifHCOutBroadcastPkts

The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCOutBroadcastPkts

Source Section

ifXEntry

jnxifHCOutMulticastPkts

The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a multicast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCOutMulticastPkts

Source Section

ifXEntry

jnxifHCOutOctets

The total number of octets transmitted out of the interface, including framing characters.

Data Source

GGSN

Source Field

ifHCOutOctets

Source Section

ifXEntry

jnxifHCOutUcastPkts

The total number of packets that higher-level protocols requested be transmitted, and which were not addressed to a multicast or broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifHCOutUcastPkts

Source Section

ifXEntry

jnxifHighSpeed

An estimate of the interface's current bandwidth in units of 1,000,000 bits per second.

Data Source

GGSN

Source Field

ifHighSpeed

Source Section

ifXEntry

jnxifIn1SecOctets

The number of octets per second (Bps, Bytes persecond), delivered by this (sub-)layer to its next higher (sub-)layer.

Data Source

GGSN

Source Field

ifIn1SecOctets

Source Section

ifJnxEntry

jnxifIn1SecPkts

The number of packets per second (pps), delivered by this (sub-)layer to its next higher (sub-)layer.

Data Source

GGSN

Source Field

ifIn1SecPkts

Source Section

ifJnxEntry

jnxifIn1SecRate

The number of bits per second (bps), delivered by this (sub-)layer to its next higher (sub-)layer.

Data Source

GGSN

Source Field

ifIn1SecRate

Source Section

ifJnxEntry

jnxifInBroadcastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifInBroadcastPkts

Source Section

ifXEntry

jnxifInDiscards

The number of inbound packets which were chosen to be discarded

Data Source

GGSN

Source Field

ifInDiscards

Source Section

ifEntry

jnxifInErrors

The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Data Source

GGSN

Source Field

ifInErrors

Source Section

ifEntry

jnxifInMulticastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a multicast address at this sub-layer.

Data Source

GGSN

Source Field

ifInMulticastPkts

Source Section

ifXEntry

jnxifInOctets

The total number of octets received on the interface, including framing characters.

Data Source

GGSN

Source Field

ifInOctets

Source Section

ifEntry

jnxifInUcastPkts

The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were not addressed to a multicast or broadcast address at this sub-layer.

Data Source

GGSN

Source Field

ifInUcastPkts

Source Section

ifEntry

jnxifInUnknownProtos

The number of packets received via the interface which were discarded because of an unknown or unsupported protocol.

Data Source

GGSN

Source Field

ifInUnknownProtos

Source Section

ifEntry

jnxifMtu

The size of the largest packet which can be sent/received on the interface, specified in octets.

Data Source

GGSN

Source Field

ifMtu

Source Section

ifEntry

jnxifOut1SecOctets

The number of octets per second (Bps, Bytes per second), delivered by this (sub-)layer to its next lower (sub-)layer.

Data Source

GGSN

Source Field

ifOut1SecOctets

Source Section

ifJnxEntry

jnxifOut1SecPkts

The number of packets per second (pps), delivered by this (sub-)layer to its next lower (sub-)layer

Data Source

GGSN

Source Field

ifOut1SecPkts

Source Section

ifJnxEntry

jnxifOut1SecRate

The number of bits per second (bps), delivered by this (sub-)layer to its next lower (sub-)layer.

Data Source

GGSN

Source Field

ifOut1SecRate

Source Section

ifJnxEntry

jnxifOutBroadcastPkts

The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a broadcast address at this sub-layer

Data Source

GGSN

Source Field

ifOutBroadcastPkts

Source Section

ifXEntry

jnxifOutDiscards

The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted.

Data Source

GGSN

Source Field

ifOutDiscards

Source Section

ifEntry

jnxifOutErrors

The number of outbound packets that could not be transmitted because of errors.

Data Source

GGSN

Source Field

ifOutErrors

Source Section

ifEntry

jnxifOutMulticastPkts

The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a multicast address at this sub-layer

Data Source

GGSN

Source Field

ifOutMulticastPkts

Source Section

ifXEntry

jnxifOutOctets

The total number of octets transmitted out of the interface, including framing characters.

Data Source

GGSN

Source Field

ifOutOctets

Source Section

ifEntry

jnxifOutQLen

The length of the output packet queue (in packets).

Data Source

GGSN

Source Field

ifOutQLen

Source Section

ifEntry

jnxifOutUcastPkts

The total number of packets that higher-level protocols requested be transmitted.

Data Source

GGSN

Source Field

ifOutUcastPkts

Source Section

ifEntry

jnxifSpeed

An estimate of the interface's current bandwidth in bits per second.

Data Source

GGSN

Source Field

ifSpeed

Source Section

ifEntry

jnxPMonAllocPerSecond

The number of flow records allocated per second.

Data Source

GGSN

Source Field

jnxPMonAllocPerSecond

Source Section

jnxPMonMemoryEntry

jnxPMonCurrentActiveFlows

The number of flows currently active.

Data Source

GGSN

Source Field

jnxPMonCurrentActiveFlows

Source Section

JnxPMonFlowEntry

jnxPMonFlowAllocFailures

The number of flow allocation failures.

Data Source

GGSN

Source Field

jnxPMonFlowAllocFailures

Source Section

JnxPMonErrorEntry

jnxPMonFlowFreeFailures

The number of flow free failures.

Data Source

GGSN

Source Field

jnxPMonFlowFreeFailures

Source Section

JnxPMonErrorEntry

jnxPMonFlowMaxAlloc

The number of maximum flow records allocated.

Data Source

GGSN

Source Field

jnxPMonFlowMaxAlloc

Source Section

jnxPMonMemoryEntry

jnxPMonFlowTotalAlloc

The number of flow records allocated.

Data Source

GGSN

Source Field

jnxPMonFlowTotalAlloc

Source Section

jnxPMonMemoryEntry

jnxPMonFlowTotalFree

The number of flow records freed.

Data Source

GGSN

Source Field

jnxPMonFlowTotalFree

Source Section

jnxPMonMemoryEntry

jnxPMonFreeListFailures

The number of free list failures.

Data Source

GGSN

Source Field

jnxPMonFreeListFailures

Source Section

JnxPMonErrorEntry

jnxPMonFreePerSecond

The number of flow records freed per second.

Data Source

GGSN

Source Field

jnxPMonFreePerSecond

Source Section

jnxPMonMemoryEntry

jnxPMonNoMemDrops

The number of packet drops due to low/no memory.

Data Source

GGSN

Source Field

jnxPMonNoMemDrops

Source Section

JnxPMonErrorEntry

jnxPMonNotIPDrops

The number of packet drops due to not IP.

Data Source

GGSN

Source Field

jnxPMonNotIPDrops

Source Section

JnxPMonErrorEntry

jnxPMonNotIPv4Drops

The number of packet drops due to not IPv4.

Data Source

GGSN

Source Field

jnxPMonNotIPv4Drops

Source Section

JnxPMonErrorEntry

jnxPMonTenSecondAverageFlowBytes

The number of flow bytes per second in 10 second average.

Data Source

GGSN

Source Field

jnxPMonTenSecondAverageFlowBytes

Source Section

JnxPMonFlowEntry

jnxPMonTenSecondAverageFlowPackets

The number of flow packets per second in 10 second average.

Data Source

GGSN

Source Field

jnxPMonTenSecondAverageFlowPackets

Source Section

JnxPMonFlowEntry

jnxPMonTooSmallDrops

The number of packet drops due to too small on header.

Data Source

GGSN

Source Field

jnxPMonTooSmallDrops

Source Section

JnxPMonErrorEntry

jnxPMonTotalFlows

The cumulative number of total flows.

Data Source

GGSN

Source Field

jnxPMonTotalFlows

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsAged

The cumulative number of total flows aged.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsAged

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsBytes

The number of total flows bytes.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsBytes

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsExpired

The cumulative number of total flows expired.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsExpired

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsExported

The cumulative number of total flows exported.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsExported

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsPackets

The number of total flows packets.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsPackets

Source Section

JnxPMonFlowEntry

jnxPMonTotalFlowsPacketsExported

The cumulative number of total flows packets exported.

Data Source

GGSN

Source Field

jnxPMonTotalFlowsPacketsExported

Source Section

JnxPMonFlowEntry

jnxPMonTotalMemoryFree

The total amount of memory currently freed in KBbytes.

Data Source

GGSN

Source Field

jnxPMonTotalMemoryFree

Source Section

jnxPMonMemoryEntry

jnxPMonTotalMemoryUsed

The total amount of memory currently used in KBbytes.

Data Source

GGSN

Source Field

jnxPMonTotalMemoryUsed

Source Section

jnxPMonMemoryEntry

Release_SNMP_GGSN

Release

Data Source

GGSN

Source Field

Release_SNMP_GGSN

Source Section

Interface General

Net_BGPPeerIP Primitive Calculations

The following is a list of primitive calculations for the Net_BGPPeerIP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Net_BGPPeerIP Peg Counts

The following is a list of peg counts for the Net_BGPPeerIP entity.

bgpPeerInTotalMessages

Total number of messages received from the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerInTotalMessages

Source Section

BGP Peer

bgpPeerInUpdates

Number of BGP UPDATE messages received on this connection.

Data Source

SGSN

Source Field

bgpPeerInUpdates

Source Section

BGP Peer

bgpPeerOutTotalMessages

Total number of messages transmitted to the remote peer on this connection.

Data Source

SGSN

Source Field

bgpPeerOutTotalMessages

Source Section

BGP Peer

bgpPeerOutUpdates

Number of BGP UPDATE messages transmitted on this connection.

Data Source

SGSN

Source Field

bgpPeerOutUpdates

Source Section

BGP Peer

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

PeerFsmEstablishedTransitions

The total number of times the BGP FSM is transitioned into the established state

Data Source

SGSN

Source Field

bgpPeerFsmEstablishedTransitions

Source Section

BGP Peer

PeerInUpdateElapsedTime

Elapsed time since the last BGP UPDATE message was received from the peer.

Data Source

SGSN

Source Field

bgpPeerInUpdateElapsedTime

Source Section

BGP Peer

Net_OSPFArea Primitive Calculations

The following is a list of primitive calculations for the Net_OSPFArea entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Net_OSPFArea Peg Counts

The following is a list of peg counts for the Net_OSPFArea entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfAreaBdrRtrCount

Total number of area border routers reachable within this area .This is initially zero, and is calculated in each Shortest Path First (SPF) Pass.

Data Source

SGSN

Source Field

ospfAreaBdrRtrCount

Source Section

OSPF Area

ospfAreaLsaCount

Total number of link-state advertisements in this area's link-state database, excluding AS External LSA's.

Data Source

SGSN

Source Field

ospfAreaLsaCount

Source Section

OSPF Area

ospfAsBdrRtrCount

Total number of Autonomous System border routers reachable within this area. This is initially zero, and is calculated in each SPF Pass.

Data Source

SGSN

Source Field

ospfAsBdrRtrCount

Source Section

OSPF Area

ospfRxNewLsas

Number of link-state advertisements received determined to be new instantiations

Data Source

SGSN

Source Field

ospfRxNewLsas

Source Section

OSPF Area

ospfSpfRuns

The number of times that the intra-area route table has been calculated using this area's link-state database. This is typically done using Dijkstra's algorithm.

Data Source

SGSN

Source Field

ospfSpfRuns

Source Section

OSPF Area

Net_OSPFInterface Primitive Calculations

The following is a list of primitive calculations for the Net_OSPFInterface entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Net_ OSPFInterface Peg Counts

The following is a list of peg counts for the Net_ OSPFInterface entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospflfEvents

Number of times this OSPF interface has changed its state, or an error has occurred.

Data Source

SGSN

Source Field

ospflfEvents

Source Section

OSPF Interface

Net_OSPFNeighIP Primitive Calculations

The following is a list of primitive calculations for the Net_OSPFNeighIP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Net_OSPFNeighIP Peg Counts

The following is a list of peg counts for the Net_OSPFNeighIP entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfNbrEvents

Number of times this neighbor relationship has changed state, or an error has occurred.

Data Source

SGSN

Source Field

ospfNbrEvents

Source Section

OSPF Neighbor

Network Primitive Calculations

The following is a list of primitive calculations for the Network entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Network Peg Counts

The following is a list of peg counts for the Network entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfExternLsaCount

Number of external (LS type 5) link-state advertisements in the link-state database.

Data Source

SGSN

Source Field

ospfExternLsaCount

Source Section

OSPF CPU

ospfOriginateNewLsas

Number of new link-state advertisements that have been originated

Data Source

SGSN

Source Field

ospfOriginateNewLsas

Source Section

OSPF CPU

ospfRxNewLsas

Number of link-state advertisements received determined to be new instantiations

Data Source

SGSN

Source Field

ospfRxNewLsas

Source Section

OSPF CPU

NSVC Primitive Calculations

The following is a list of primitive calculations for the NSVC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

NSVC Peg Counts

The following is a list of peg counts for the NSVC entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

Source Field

granularity period (gp)

GSNRelease

Release of GSN

Data Source

SGSN

Source Field

showelements.Release

nsDownlinkPackets

The number of downlink packets sent by the Network Service (NS) layer.

Data Source

SGSN

Source Field

nsDownlinkPackets

Source Section

Network Service Virtual Connection

nsDownlinkPacketsDiscarded

The number of downlink packets discarded by the NS layer.

Data Source

SGSN

Source Field

nsDownlinkPacketsDiscarded

Source Section

Network Service Virtual Connection

OSPFArea Primitive Calculations

The following is a list of primitive calculations for the OSPFArea entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

OSPFArea Peg Counts

The following is a list of peg counts for the OSPFArea entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfAreaBdrRtrCount

Total number of area border routers reachable within this area

Data Source

SGSN

Source Field

ospfAreaBdrRtrCount

Source Section

OSPF Area

ospfAreaLsaCount

Total number of link-state advertisements in this area's link-state database, excluding AS External LSA's.

Data Source

SGSN

Source Field

ospfAreaLsaCount

Source Section

OSPF Area

ospfAsBdrRtrCount

Total number of Autonomous System border routers reachable within this area

Data Source

SGSN

Source Field

ospfAsBdrRtrCount

Source Section

OSPF Area

ospfRxNewLsas_R30

Number of link-state advertisements received determined to be new instantiations

Data Source

SGSN

Source Field

ospfRxNewLsas

Source Section

OSPF Area

ospfSpfRuns

Number of times that the intra-area route table has been calculated using this area's link-state database

Data Source

SGSN

Source Field

ospfSpfRuns

Source Section

OSPF Area

OSPFInterface Primitive Calculations

The following is a list of primitive calculations for the OSPFInterface entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt()

OSPFInterface Peg Counts

The following is a list of peg counts for the OSPFInterface entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfIfEvents

Number of times this OSPF interface has changed its state, or an error has occurred.

Data Source

SGSN

Source Field

ospfIfEvents

Source Section

OSPF Interface

OSPFNeighIP Primitive Calculations

The following is a list of primitive calculations for the OSPFNeighIP entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

OSPFNeighIP Peg Counts

The following is a list of peg counts for the OSPFNeighIP entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ospfNbrEvents

Number of times this neighbor relationship has changed state, or an error has occurred.

Data Source

SGSN

Source Field

ospfNbrEvents

Source Section

OSPF Neighbor

PIU Primitive Calculations

The following is a list of primitive calculations for the PIU entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

PIU Peg Counts

The following is a list of peg counts for the PIU entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

gsnCpuUsageGPB

(Removed in R8MD) Current CPU usage per processor for a General Processing Board (GPB).
R7: The value is changed from the average of one second to one minute.

Data Source

SGSN

Source Field

SYS.gsnCpuUsageGPB

Source Section

System Resource

gsnCpuUsageIB

(Removed in R8MD) Current CPU usage per processor for an Interface Board (IBxx). R7: The value is changed from the average of one second to one minute.

Data Source

SGSN

Source Field

SYS.gsnCpuUsageIB

Source Section

System Resource

GSNRelease

Release of GSN

Data Source

SGSN

SYSGsnCpuUsage

This measurement shows the current CPU usage per processor for an IBxx or GPB. The value is the average CPU load measured on a per minute basis.

Data Source

SGSN

Source Field

SYS.gsnCpuUsage

Source Section

System Resource

SYSGsnMemUsage

This measurement shows the current Memory usage per processor for an IBxx or GPB. (not Power and Ethernet Board (PEB)) The value is the average Memory consumption measured on a per minute basis.

Data Source

SGSN

Source Field

SYS.gsnMemUsage

Source Section

System Resource

RA_GSN Primitive Calculations

The following is a list of primitive calculations for the RA_GSN entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SuccGprsAttachRate

Successful GPRS attach procedures initiated in this SGSN area

Calculation

$$\text{MMSuccGprsAttachU} * 100.0 / \text{MMAttGprsAttachU}$$

SuccIntraSgsnRaUpdate

Successful intra-SGSN Routing Area Update procedure initiated in this SGSN area in percent

Calculation

$$\text{MMSuccIntraSgsnRaUpdateU} * 100.0 / \text{MMAttIntraSgsnRaUpdateU}$$

RA_GSN Peg Counts

The following is a list of peg counts for the RA_GSN entity.

GSN_RELEASE

Release

Data Source

SGSN

MMAttGprsAttachU

Attempted GPRS attach procedures initiated in this SGSN area

Data Source

SGSN

Source Field

MM.AttGprsAttach.U

MMAttGprsDetachMsU

Number of attempted GPRS detach procedures initiated by MS in this SGSN area

Data Source

SGSN

Source Field

MM.AttGprsDetachMs.U

MMAttGprsDetachSgsnU

Number of attempted GPRS detach procedures initiated by SGSN

Data Source

SGSN

Source Field

MM.AttGprsDetachSgsn.U

MMAttInterSgsnRaUpdateU

No of att inter-SGSN Routing Area Update procedures initiated in this SGSN area

Data Source

SGSN

Source Field

MM.AttInterSgsnRaUpdate.U

MMAttIntraSgsnRaUpdateU

Attempted intra-SGSN Routing Area Update procedures initiated in this SGSN area

Data Source

SGSN

Source Field

MM.AttIntraSgsnRaUpdate.U

MM SuccGprsAttachU

Successful GPRS attach procedures initiated in this SGSN area

Data Source

SGSN

Source Field

MM.SuccGprsAttach.U

MMSuccInterSgsnRaUpdateU

No of succ comp inter-SGSN Routing Area Update Proc initiated in this SGSN area

Data Source

SGSN

Source Field

MM.SuccInterSgsnRaUpdate.U

MMSuccIntraSgsnRaUpdateU

Successful intra-SGSN Routing Area Update procedure initiated in this SGSN area

Data Source

SGSN

Source Field

MM.SuccIntraSgsnRaUpdate.U

PERLENSEC

Period Length

Data Source

SGSN

SecAssoc Primitive Calculations

The following is a list of primitive calculations for the SecAssoc entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SecAssoc Peg Counts

The following is a list of peg counts for the SecAssoc entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ipsecSACurrentBytes_R30

Number of bytes transferred on this SA so far.

Data Source

SGSN

Source Field

ipsecSACurrentBytes

Source Section

IPsec Security Association (SA)

ipsecSAPacketsNotOk_R30

Number of incorrect packets processed associated with the current SA.

Data Source

SGSN

Source Field

ipsecSAPacketsNotOk

Source Section

IPsec Security Association (SA)

ipsecSAPacketsOk_R30

Number of correct packets processed associated with the current SA.

Data Source

SGSN

Source Field

ipsecSAPacketsOk

Source Section

IPsec Security Association (SA)

SecAssoc_Card Primitive Calculations

The following is a list of primitive calculations for the SecAssoc_Card entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SecAssoc_Card Peg Counts

The following is a list of peg counts for the SecAssoc_Card entity.

collectionPeriod

GPRS General

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

ipsecSACurrentBytes_R21

Number of bytes transferred on this SA so far.

Data Source

SGSN

Source Field

ipsecSACurrentBytes

Source Section

IPsec Security Association (SA)

ipsecSAPacketsNotOk_R21

Number of incorrect packets processed associated with the current SA.

Data Source

SGSN

Source Field

ipsecSAPacketsNotOk

Source Section

IPsec Security Association (SA)

ipsecSAPacketsOk_R21

Number of correct packets processed associated with the current SA.

Data Source

SGSN

Source Field

ipsecSAPacketsOk

Source Section

IPsec Security Association (SA)

SGSN_GGSN Primitive Calculations

The following is a list of primitive calculations for the SGSN_GGSN entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

pSGSN_GGSNdropPackRatedown

dropped packets ratio to total packets in the downlink direction per SGSN in percent

Calculation

$$(\text{ggsnSgsnDownlinkDrops} * 100.0) / (1.0 * \text{ggsnSgsnDownlinkPackets})$$

pSGSN_GGSNdropPackRateup

Total SGSN-GGSN Packet Success Rate is the Total Average Success Factor of the overall Packets sent to and Received from ALL GGSNs. Each success factor is weighted by the is weighted by percentage of total packets in either uplink or downlink direction

Calculation

$$(\text{ggsnSgsnUplinkDrops} * 100.0) / (1.0 * \text{ggsnSgsnUplinkPackets})$$

pSGSN_GGSNpacksizeDown

Average packet size is the ratio between bytes send and number of packets in downlink per SGSN

Calculation

$$(\text{ggsnSgsnDownlinkBytes} * 1.0) / (1.0 * \text{ggsnSgsnDownlinkPackets})$$

pSGSN_GGSNpacksizeUp

Average packet size is the ratio between bytes send and number of packets in uplink per SGSN

Calculation

$$(\text{ggsnSgsnUplinkBytes} * 1.0) / (1.0 * \text{ggsnSgsnUplinkPackets})$$

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SGSN_GGSN Peg Counts

The following is a list of peg counts for the SGSN_GGSN entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod_GGSNCLI

Source Section

SGSN_GGSN General

collectionPeriod_SNMP_GGSN

Period Length

Data Source

GSGN

Source Field

collectionPeriod

Source Section

SGSN_GGSN General

ggsnSgsn_err_ind_recvd

GTP request results Error indications received Collected using CLI

Data Source

GGSN

Source Field

GTPrequestresultsErrorindicationsreceived

Source Section

ggsnstatisticssgsn

ggsnSgsn_err_ind_trans

GTP request results Error indications Transmitted Collected using CLI

Data Source

GGSN

Source Field

GTPrequestresultsErrorindicationsTransmitted

Source Section

ggsnstatisticssgsn

ggsnSgsnDownlinkBytes

Number of Downlink GTP-U bytes sent to the specific SGSN from the GGSN Collected using CLI.

Data Source

GGSN

Source Field

DownlinktrafficBytes

Source Section

ggsnstatisticssgsn

ggsnSgsnDownlinkBytes_jn

Total bytes for all processed downlink packets on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnDownlinkBytes

Source Section

ggsnSgsnStatsTable

ggsnSgsnDownlinkDrops

Number of Downlink GTP-U packets dropped for the specific SGSN Collected using CLI.

Data Source

GGSN

Source Field

DownlinktrafficDroppedpackets

Source Section

ggsnstatisticssgsn

ggsnSgsnDownlinkDrops_jn

Total dropped packets in the downlink direction on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnDownlinkDrops

Source Section

ggsnSgsnStatsTable

ggsnSgsnDownlinkPackets

Number of Downlink GTP-U packets sent to the specific SGSN from the GGSN Collected using CLI.

Data Source

GGSN

Source Field

DownlinktrafficPackets

Source Section

ggsnstatisticssgsn

ggsnSgsnDownlinkPackets_jn

Total downlink packets processed on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnDownlinkPackets

Source Section

ggsnSgsnStatsTable

ggsnSgsnUplinkBytes

Number of Uplink GTP-U bytes sent from the specific SGSN to the GGSN Collected using CLI.

Data Source

GGSN

Source Field

UplinktrafficBytes

Source Section

ggsnstatisticssgsn

ggsnSgsnUplinkBytes_jn

Total bytes for all processed uplink packets on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnUplinkBytes

Source Section

ggsnSgsnStatsTable

ggsnSgsnUplinkDrops

Number of Uplink GTP-U packets dropped for the specific SGSN Collected using CLI.

Data Source

GGSN

Source Field

UplinktrafficDroppedpackets

Source Section

ggsnstatisticssgsn

ggsnSgsnUplinkDrops_jn

Count of dropped packets in the uplink direction on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnUplinkDrops

Source Section

ggsnSgsnStatsTable

ggsnSgsnUplinkPackets

Number of Uplink GTP-U packets sent from the specific SGSN to the GGSN Collected using CLI

Data Source

GGSN

Source Field

UplinktrafficPackets

Source Section

ggsnstatisticssgsn

ggsnSgsnUplinkPackets_jn

Total uplink packets processed on a per SGSN.

Data Source

GSGN

Source Field

ggsnSgsnUplinkPackets

Source Section

ggsnSgsnStatsTable

GSGNRelease

Release

Data Source

GGSN

Source Field

GSGNRelease_GGSNCLI

Source Section

SGSN_GGSN General

Release_SNMP_GGSN

Release

Data Source

GSGN

Source Field

GSGNRelease

Source Section

SGSN_GGSN General

SrcClass Primitive Calculations

The following is a list of primitive calculations for the SrcClass entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SrcClass Peg Counts

The following is a list of peg counts for the SrcClass entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

SrcClass General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

SrcClass General

jnxScuStatsBytes

The number of bytes sent out of jnxScuStatsDstIfIndex that match the source class (jnxScuStatsClassName) and match the address type (jnxScuStatsAddrFamily) defined for this table entry.

Data Source

GGSN

Source Field

jnxScuStatsBytes

Source Section

jnxScuStatsEntry

jnxScuStatsPackets

The number of packets sent out of jnxScuStatsDstIfIndex that match the source class (jnxScuStatsClassName) and match the address type (jnxScuStatsAddrFamily) defined for this table entry.

Data Source

GGSN

Source Field

jnxScuStatsPackets

Source Section

jnxScuStatsEntry

SS7 Primitive Calculations

The following is a list of primitive calculations for the SS7 entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SS7 Peg Counts

The following is a list of peg counts for the SS7 entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

GSNRelease

Release of GSN

Data Source

SGSN

NoOfCurrRunConnTot

The number of currently running connections, total.

Data Source

SGSN

Source Field

ss7NoOfCurrRunConnTot

Source Section

SS7 SCCP Layer

NoOfIncSegMes

The number of incoming segmented messages.

Data Source

SGSN

Source Field

ss7NoOfIncSegMes

Source Section

SS7 SCCP Layer

NoOfRunDialTot

The number of running dialogues, total.

Data Source

SGSN

Source Field

ss7NoOfRunDialTot

Source Section

SS7 TCAP Layer

NoOfRunOpTot

The number of running operations, total.

Data Source

SGSN

Source Field

ss7NoOfRunOpTot

Source Section

SS7 TCAP Layer

ss7MessageOrigCR

The number of Connection Request messages sent.

Data Source

SGSN

Source Field

ss7MessageOrigCR

Source Section

SS7

ss7MessageOrigDT1

The number of Data Form 1 messages sent (Connection Oriented data).

Data Source

SGSN

Source Field

ss7MessageOrigDT1

Source Section

SS7

ss7MessageOrigRLSD

The number of Released messages sent.

Data Source

SGSN

Source Field

ss7MessageOrigRLSD

Source Section

SS7 SCCP Layer

ss7MessageOrigUDT

The total number of unit data (UDT) messages originated per class and source.

Data Source

SGSN

Source Field

ss7MessageOrigUDT

Source Section

SS7 SCCP Layer

ss7MessageOrigXUDT

The total number of extended unit data (XUDT) messages originated per class and source

Data Source

SGSN

Source Field

ss7MessageOrigXUDT

Source Section

SS7 SCCP Layer

ss7MessageTermCR

The number of Connection Request messages received.

Data Source

SGSN

Source Field

ss7MessageTermCR

ss7MessageTermDT1

The number of Data Form 1 messages received (Connection Oriented data).

Data Source

SGSN

Source Field

ss7MessageTermDT1

ss7MessageTermRLSD

The number of Released messages received.

Data Source

SGSN

Source Field

ss7MessageTermRLSD

ss7MessageTermUDT

The total number of UDT messages terminated per class and sink

Data Source

SGSN

Source Field

ss7MessageTermUDT

Source Section

SS7 SCCP Layer

ss7MessageTermXUDT

The total number of XUDT messages, that are terminated.

Data Source

SGSN

Source Field

ss7MessageTermXUDT

Source Section

SS7 SCCP Layer

ss7MSUDiscardError

The message signaling unit (MSU) is discarded due to routing data error

Data Source

SGSN

Source Field

ss7MSUDiscardError

Source Section

SS7 MTP layer

ss7ProtocolErrorComp

A protocol error is detected in component portion.

Data Source

SGSN

Source Field

ss7ProtocolErrorComp

Source Section

SS7 TCAP Layer

ss7ProtocolErrorTraA

A protocol error has occurred, since P-abort is unrecognized transaction identity (TID)

Data Source

SGSN

Source Field

ss7ProtocolErrorTraA

Source Section

SS7 TCAP Layer

ss7ProtocolErrorTraD

A protocol error has occurred, since P-abort is unrecognized message type.

Data Source

SGSN

Source Field

ss7ProtocolErrorTraD

Source Section

SS7 TCAP Layer

ss7SLFailure

Retired fr 5.0.10.0.0-Signaling link (SL) failure is detected

Data Source

SGSN

Source Field

ss7SLFailure

Source Section

SS7 MTP layer

ss7SLRestoration

Retired fr 5.0.10.0.0-SL restoration has occurred

Data Source

SGSN

Source Field

ss7SLRestoration

Source Section

SS7 MTP layer

ss7SPInaccess

The adjacent signaling point (SP) is inaccessible

Data Source

SGSN

Source Field

ss7SPInaccess

Source Section

SS7 MTP layer

ss7TCMessageReceive

The total number of TC messages received by the stack.

Data Source

SGSN

Source Field

ss7TCMessageReceive

Source Section

SS7 TCAP Layer

ss7TCMessageSent

The total number of transaction capability (TC) messages sent by the stack.

Data Source

SGSN

Source Field

ss7TCMessageSent

Source Section

SS7 TCAP Layer

SS7Association Primitive Calculations

The following is a list of primitive calculations for the SS7Association entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

SS7Association Peg Counts

The following is a list of peg counts for the SS7Association entity.

ss7MessageReceivedPerAssociation

This measurement provides the number of Message Signal Units (MSUs) received on the MTP-L3 User Adaptation Layer (M3UA) association. The maximum read interval is 900 sec.

Data Source

SGSN

Source Field

ss7MessageReceivedPerAssociation

Source Section

SS7 Association

ss7MessageSentPerAssociation

This measurement type provides the number of MSUs sent on the M3UA association. The MagId.SlotId in the index is for the SCTP FE handling the association. The maximum read interval is 900 sec.

Data Source

SGSN

Source Field

ss7MessageSentPerAssociation

Source Section

SS7 Association

ss7OctetsReceivedPerAssociation

This measurement provides the number of kbytes received by M3UA on an M3UA association. The maximum read interval is 3600 sec.

Data Source

SGSN

Source Field

ss7OctetsReceivedPerAssociation

Source Section

SS7 Association

ss7OctetsSentPerAssociation

The number of kbytes sent by M3UA on an M3UA association. The maximum read interval is 3600 sec.

Data Source

SGSN

Source Field

ss7OctetsSentPerAssociation

Source Section

SS7 Association

SSN Primitive Calculations

The following is a list of primitive calculations for the SSN entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SSN Peg Counts

The following is a list of peg counts for the SSN entity.

ss7NoOfRunDialPerSsn

The number of running TCAP dialogs per SSN.

Data Source

SGSN

Source Field

ss7NoOfRunDialPerSsn

ss7NoOfRunOpPerSsn

The number of running TCAP operations per SSN.

Data Source

SGSN

Source Field

ss7NoOfRunOpPerSsn

System Primitive Calculations

The following is a list of primitive calculations for the System entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PercentActiveSubscribers

Percent Active Subscribers

Calculation

$$\frac{\text{sum}(\text{MSC.HLRSubs}[\text{subString}(\text{LocalKey}, 1, 6) = "420608"], \text{NHLRREGAST}) * 100.0}{\text{sum}(\text{HLR}, \text{NSUBSCNT})}$$

PercentRegisteredSubscribers

Percent Registered Subscribers

Calculation

$$\frac{\text{sum}(\text{MSC.HLRSubs}[\text{subString}(\text{LocalKey}, 1, 6) = "420608"], \text{NHLRMSST}) * 100.0}{\text{sum}(\text{HLR}, \text{NSUBSCNT})}$$

pTotalGGSNPacketSuccessRate

Total GGSN Packet Success Rate is the Total Average Success Factor of the overall Packets sent to and Received from ALL GGSNs

Calculation

`aggr (GSNTType.GSN, pGGSNPacketSuccessRate)`

pTotalSessionManSuccessRateGGSN

Total Session Management Success Rate

Calculation

`aggr (GSNTType.GSN, pSessionManSuccessRateGGSN)`

RegisteredInroamers

Registered Inroamers

Calculation

`sum (MSC.HLRSubs[subString(LocalKey, 1, 6) != "420608"], NHLRMSST)`

RegisteredOutroamer

Registered Outroamers

Calculation

`sum (HLR.PLMN[subString(LocalKey, 1, 6) != "420608"], vsum(GPPERPLMNCNT, PERPLMNCNT))`

SubscribersHLR

Subscribers in HLR

Calculation

`AGGR (HLR, NSUBSCNT)`

SubscribersVLR

Subscribers in VLR

Calculation

`sum (MSC.HLRSubs[subString(LocalKey, 1, 6) = "420608"], NHLRMSST)`

TotalCellTCHTraffic

Average TCH/F Traffic Level

Calculation

`protect (sum (MSC.BSC.BTSSite.Cell, TCF_TRAFF_VOL))`

TotalSwitchedTraffic

Generates a predefined graph showing total switch traffic in the network and total air traffic

Calculation

`sum(MSC, TotalSwitchedTraffic)`

TA_Name Primitive Calculations

The following is a list of primitive calculations for the TA_Name entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

`""`

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

TA_Name Peg Counts

The following is a list of peg counts for the TA_Name entity.

collectionPeriod

Collection period in seconds

Data Source

SGSN

greTaCurrentBytes

Number of bytes transferred including the tunnel overhead

Data Source

SGSN

Source Field

greTaCurrentBytes

Source Section

GRE Tunnel Association

greTaPacketsNotOk

Number of incorrect packets processed associated with the current TA

Data Source

SGSN

Source Field

greTaPacketsNotOk

Source Section

GRE Tunnel Association

greTaPacketsOk

Number of correct packets processed associated with the current TA

Data Source

SGSN

Source Field

greTaPacketsOk

Source Section

GRE Tunnel Association

GSNRelease

Release of GSN

Data Source

SGSN

TimeSlot Primitive Calculations

The following is a list of primitive calculations for the TimeSlot entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

TimeSlot Peg Counts

The following is a list of peg counts for the TimeSlot entity.

ss7MessageReceivedPerLinkNb6

The number of MSU messages received on this narrowband link.

Data Source

SGSN

Source Field

ss7MessageReceivedPerLinkNb

Source Section

SS7 Narrowband Link Counter Tokens

ss7MessageSentPerLinkNb

The number of MSU messages sent on this narrowband link.

Data Source

SGSN

Source Field

ss7MessageSentPerLinkNb

ss7OctetsReceivedPerLinkNb

This measurement provides the number of KB received by MTP-L3 on a narrowband link. The maximum read interval is 10800 sec.

Data Source

SGSN

Source Field

ss7OctetsReceivedPerLinkNb

Source Section

SS7

ss7OctetsSentPerLinkNb

This measurement provides the number of KB sent by MTP-L3 on a narrowband link. The maximum read interval is 10800 sec.

Data Source

SGSN

Source Field

ss7OctetsSentPerLinkNb

Source Section

SS7

ss7SLFailureNb

The number of narrowband signaling link (SL) failures detected per link.

Data Source

SGSN

Source Field

ss7SLFailureNb

Source Section

SS7

ss7SLRestorationNb

The number of narrowband SL restorations occurred per link.

Data Source

SGSN

Source Field

ss7SLRestorationNb

Source Section

SS7

Trunk Primitive Calculations

The following is a list of primitive calculations for the Trunk entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PVCThroughputRx

Throughput a PVC reception during data collection KBytes/s

Calculation

`frWanRxBytes / (61440.0 * collectionPeriod)`

PVCThroughputTx

Throughput a PVC transmission during 15 minutes

Calculation

`frWanTxBytes / (61440.0 * collectionPeriod)`

TrunkGOS

Dimensioned Grade of Service

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

Trunk Peg Counts

The following is a list of peg counts for the Trunk entity.

collectionPeriod

GPRS General

Data Source

SGSN

frWanLmiErrors

Number of bad frames received on LMI DLCI (Link).

Data Source

SGSN

Source Field

frWanLmiErrors

Source Section

Frame Relay Link

frWanLmiTimeouts

Number of times T392 timer expired (Link).

Data Source

SGSN

Source Field

frWanLmiTimeouts

Source Section

Frame Relay Link

frWanLmiWanFlows

Number of canput fails for frames on the LMI channel (Link).

Data Source

SGSN

Source Field

frWanLmiWanFlows

Source Section

Frame Relay Link

frWanRxAsynchs

Number of asynchronous frames received (Link).

Data Source

SGSN

Source Field

frWanRxAsynchs

Source Section

Frame Relay Link

frWanRxBytes

Total number of bytes received (Link).

Data Source

SGSN

Source Field

frWanRxBytes

Source Section

Frame Relay Link

frWanRxCLLMs

Number of CLLM messages received (Link).

Data Source

SGSN

Source Field

frWanRxCLLMs

Source Section

Frame Relay Link

frWanRxDrops

Number of rx buffer allocation failures (Link).

Data Source

SGSN

Source Field

frWanRxDrops

Source Section

Frame Relay Link

frWanRxFrames

Total number of frames received (Link).

Data Source

SGSN

Source Field

frWanRxFrames

Source Section

Frame Relay Link

frWanRxFullStat

Number of full status frames received (Link).

Data Source

SGSN

Source Field

frWanRxFullStat

Source Section

Frame Relay Link

frWanRxInvDLCI

Number of frames for invalid DLCIs (Link).

Data Source

SGSN

Source Field

frWanRxInvDLCI

Source Section

Frame Relay Link

frWanRxInvRq

Number of invalid frames received (Link).

Data Source

SGSN

Source Field

frWanRxInvRq

Source Section

Frame Relay Link

frWanRxLmiPolls

Number of PVC status enquiries (Link).

Data Source

SGSN

Source Field

frWanRxLmiPolls

Source Section

Frame Relay Link

frWanRxSeqOnly

Number of keep alive frames received (Link).

Data Source

SGSN

Source Field

frWanRxSeqOnly

Source Section

Frame Relay Link

frWanRxTooBig

Frames received exceeding maximum size (Link).

Data Source

SGSN

Source Field

frWanRxTooBig

Source Section

Frame Relay Link

frWanRxUnattDLCIs

Number of frames for unattached (unused) DLCIs (Link).

Data Source

SGSN

Source Field

frWanRxUnattDLCIs

Source Section

Frame Relay Link

frWanTxBytes

Total number of bytes transmitted (Link).

Data Source

SGSN

Source Field

frWanTxBytes

Source Section

Frame Relay Link

frWanTxDrops

Number of tx buffer allocation failures due to drops (Link).

Data Source

SGSN

Source Field

frWanTxDrops

Source Section

Frame Relay Link

frWanTxFrames

Total number of frames transmitted (Link).

Data Source

SGSN

Source Field

frWanTxFrames

Source Section

Frame Relay Link

frWanTxFullStat

Number of full status enquiry responses sent (Link).

Data Source

SGSN

Source Field

frWanTxFullStat

Source Section

Frame Relay Link

frWanTxInvRq

Number of invalid transmission frames (Link).

Data Source

SGSN

Source Field

frWanTxInvRq

Source Section

Frame Relay Link

frWanTxLmiPolls

Number of transmitted PVC status enquiries (Link).

Data Source

SGSN

Source Field

frWanTxLmiPolls

Source Section

Frame Relay Link

frWanTxNoBuff

Number of tx buffer allocation failures due to no buffer (Link).

Data Source

SGSN

Source Field

frWanTxNoBuff

Source Section

Frame Relay Link

frWanTxSeqOnly

Number of other status enquiry responses sent (Link).

Data Source

SGSN

Source Field

frWanTxSeqOnly

Source Section

Frame Relay Link

frWanTxStops

Number of congested transmit frames (Link).

Data Source

SGSN

Source Field

frWanTxStops

Source Section

Frame Relay Link

frWanWanFlows

Number of canput fails on the lower layer (Link).

Data Source

SGSN

Source Field

frWanWanFlows

Source Section

Frame Relay Link

GSNRelease

Release of GSN

Data Source

SGSN

hdlcRxErrAbort

Number of frames discarded due to a disruption in the reception caused by a received HDLC Abort pattern.

Data Source

SGSN

Source Field

hdlcRxErrAbort

Source Section

E1/T1

hdlcRxErrAbort_SubSlot3

Number of frames discarded due to a disruption in the reception caused by a received HDLC Abort pattern, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrAbort

Source Section

E1/T1

hdlcRxErrAbort_SubSlot4

Number of frames discarded due to a disruption in the reception caused by a received HDLC Abort pattern, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrAbort

Source Section

E1/T1

hdlcRxErrBusy

Busy error. Number of times the fraction has been restarted because the SCC has no empty message block in the Rx-BD queue to write the data to

Data Source

SGSN

Source Field

hdlcRxErrBusy

Source Section

E1/T1

hdlcRxErrBusy_SubSlot3

Busy error. Number of times the fraction has been restarted because the SCC has no empty message block in the Rx-BD queue to write the data to, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrBusy

Source Section

E1/T1

hdlcRxErrBusy_SubSlot4

Busy error. Number of times the fraction has been restarted because the SCC has no empty message block in the Rx-BD queue to write the data to, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrBusy

Source Section

E1/T1

hdlcRxErrCRC

Number of frames discarded due to CRC error.

Data Source

SGSN

Source Field

hdlcRxErrCRC

Source Section

E1/T1

hdlcRxErrCRC_SubSlot3

Number of frames discarded due to CRC error, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrCRC

Source Section

E1/T1

hdlcRxErrCRC_SubSlot4

Number of frames discarded due to CRC error, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrCRC

Source Section

E1/T1

hdlcRxErrLackOfBufs

Number of discarded frames due to an empty STREAMS message block pool.

Data Source

SGSN

Source Field

hdlcRxErrLackOfBufs

Source Section

E1/T1

hdlcRxErrLackOfBufs_SubSlot3

Number of discarded frames due to an empty STREAMS message block pool, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrLackOfBufs

Source Section

E1/T1

hdlcRxErrLackOfBufs_SubSlot4

Number of discarded frames due to an empty STREAMS message block pool, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrLackOfBufs

Source Section

E1/T1

hdlcRxErrMaxFrameLen

Number of frames discarded due to exceeded maximum frame length.

Data Source

SGSN

Source Field

hdlcRxErrMaxFrameLen

Source Section

E1/T1

hdlcRxErrMaxFrameLen_SubSlot3

Number of frames discarded due to exceeded maximum frame length, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrMaxFrameLen

Source Section

E1/T1

hdlcRxErrMaxFrameLen_SubSlot4

Number of frames discarded due to exceeded maximum frame length, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrMaxFrameLen

Source Section

E1/T1

hdlcRxErrNonOctetAlign

Number of frames discarded due to noneven 8-bit length.

Data Source

SGSN

Source Field

hdlcRxErrNonOctetAlign

Source Section

E1/T1

hdlcRxErrNonOctetAlign_SubSlot3

Number of frames discarded due to noneven 8-bit length, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrNonOctetAlign

Source Section

E1/T1

hdlcRxErrNonOctetAlign_SubSlot4

Number of frames discarded due to noneven 8-bit length, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrNonOctetAlign

Source Section

E1/T1

hdlcRxErrQueue

Number of frames lost due to internal queue error.

Data Source

SGSN

Source Field

hdlcRxErrQueue

Source Section

E1/T1

hdlcRxErrQueue_SubSlot3

Number of frames lost due to internal queue error, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxErrQueue

Source Section

E1/T1

hdlcRxErrQueue_SubSlot4

Number of frames lost due to internal queue error, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxErrQueue

Source Section

E1/T1

hdlcRxOctets

Number of received bytes.

Data Source

SGSN

Source Field

hdlcRxOctets

Source Section

E1/T1

hdlcRxOctets_SubSlot3

Number of received bytes, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxOctets

Source Section

E1/T1

hdlcRxOctets_SubSlot4

Number of received bytes, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxOctets

Source Section

E1/T1

hdlcRxOK

Number of received correct frames.

Data Source

SGSN

Source Field

hdlcRxOK

Source Section

E1/T1

hdlcRxOK_SubSlot3

Number of received correct frames, type 3 or 4.

Data Source

SGSN

Source Field

hdlcRxOK

Source Section

E1/T1

hdlcRxOK_SubSlot4

Number of received correct frames, type 1 or 2.

Data Source

SGSN

Source Field

hdlcRxOK

Source Section

E1/T1

hdlcTxOctets

Number of transmitted bytes.

Data Source

SGSN

Source Field

hdlcTxOctets

Source Section

E1/T1

hdlcTxOctets_SubSlot3

Number of transmitted bytes, type 3 or 4.

Data Source

SGSN

Source Field

hdlcTxOctets

Source Section

E1/T1

hdlcTxOctets_SubSlot4

Number of transmitted bytes, type 1 or 2.

Data Source

SGSN

Source Field

hdlcTxOctets

Source Section

E1/T1

hdlcTxOK

Number of transmitted frames.

Data Source

SGSN

Source Field

hdlcTxOK

Source Section

E1/T1

hdlcTxOK_SubSlot3

Number of transmitted frames, type 3 or 4.

Data Source

SGSN

Source Field

hdlcTxOK

Source Section

E1/T1

hdlcTxOK_SubSlot4

Number of transmitted frames, type 1 or 2.

Data Source

SGSN

Source Field

hdlcTxOK

Source Section

E1/T1

pppIBytes

Total number of bytes received on interface

Data Source

SGSN

Source Field

pppIBytes

Source Section

PPP

pppIErrors

Total number of input errors on interface

Data Source

SGSN

Source Field

pppIErrors

Source Section

PPP

pppIPackets

Total number of packets received on interface

Data Source

SGSN

Source Field

pppIPackets

Source Section

PPP

pppIPRcvd

Total number of IP packets received on interface

Data Source

SGSN

Source Field

pppIPRcvd

Source Section

PPP

pppIPSent

Total number of IP packets sent on interface

Data Source

SGSN

Source Field

pppIPSent

Source Section

PPP

pppOBytes

Total number of bytes sent on interface

Data Source

SGSN

Source Field

pppOBytes

Source Section

PPP

pppOErrors

Total number of output errors on interface

Data Source

SGSN

Source Field

pppOErrors

Source Section

PPP

pppOPackets

Total number of packets sent on interface

Data Source

SGSN

Source Field

pppOPackets

Source Section

PPP

VirtualChannel Primitive Calculations

The following is a list of primitive calculations for the VirtualChannel entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

`nullInt()`

VirtualChannel Peg Counts

The following is a list of peg counts for the VirtualChannel entity.

aal5VccCrcErrors

The number of AAL5 CPCS PDUs received with CRC-32 errors on this AAL5 VCC at the interface associated with an AAL5 entity.

Data Source

GGSN

Source Field

aal5VccCrcErrors

Source Section

aal5VccEntry

aal5VccOverSizedSDUs

The number of AAL5 CPCS PDUs discarded on this AAL5 VCC at the interface associated with an AAL5 entity because the AAL5 SDUs were too large.

Data Source

GGSN

Source Field

aal5VccOverSizedSDUs

Source Section

aal5VccEntry

aal5VccSarTimeOuts

of partially re-assembled AAL5 CPCS PDUs which were discarded on this AAL5 VCC at the interface because they were not fully re-assembled within the required time period.

Data Source

GGSN

Source Field

aal5VccSarTimeOuts

Source Section

aal5VccEntry

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

VirtualChannel General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

VirtualChannel General

jnxAtmVCConnType

The type of connection.

Data Source

GGSN

Source Field

jnxAtmVCConnType

Source Section

jnxAtmVCEntry

jnxAtmVCEncapsulation

The atm encapsulation type associated with the VC.

Data Source

GGSN

Source Field

jnxAtmVCEncapsulation

Source Section

jnxAtmVCEntry

jnxAtmVCInBytes

The number of bytes received on the VC.

Data Source

GGSN

Source Field

jnxAtmVCInBytes

Source Section

jnxAtmVCEntry

jnxAtmVCInOAMF5AISCells

The number of OAM F5 cells received, with AIS bit set.

Data Source

GGSN

Source Field

jnxAtmVCInOAMF5AISCells

Source Section

jnxAtmVCEntry

jnxAtmVCInOAMF5LoopCells

The number of OAM F5 loopback cells received.

Data Source

GGSN

Source Field

jnxAtmVCInOAMF5LoopCells

Source Section

jnxAtmVCEntry

jnxAtmVCInOAMF5RDICells

The number of OAM F5 cells received, with RDI bit set.

Data Source

GGSN

Source Field

jnxAtmVCInOAMF5RDICells

Source Section

jnxAtmVCEntry

jnxAtmVCInPkts

The number of packets received on the VC.

Data Source

GGSN

Source Field

jnxAtmVCInPkts

Source Section

jnxAtmVCEnter

jnxAtmVCOAMDownCellCount

The minimum number of loopback cells to be received to declare that the VC is down.

Data Source

GGSN

Source Field

jnxAtmVCOAMDownCellCount

Source Section

jnxAtmVCEnter

jnxAtmVCOAMPeriod

This time interval indicates how often the F5 cells are sent to know the status of the VC.

Data Source

GGSN

Source Field

jnxAtmVCOAMPeriod

Source Section

jnxAtmVCEnter

jnxAtmVCOAMUpCellCount

The minimum number of loopback cells to be received to declare that the VC is up.

Data Source

GGSN

Source Field

jnxAtmVCOAMUpCellCount

Source Section

jnxAtmVCEntry

jnxAtmVCOutBytes

The number of bytes sent out on the VC.

Data Source

GGSN

Source Field

jnxAtmVCOutBytes

Source Section

jnxAtmVCEntry

jnxAtmVCOutOAMF5LoopCells

The number of OAM F5 loopback cells sent.

Data Source

GGSN

Source Field

jnxAtmVCOutOAMF5LoopCells

Source Section

jnxAtmVCEntry

jnxAtmVCOutOAMF5RDICells

The number of OAM F5 cells transmitted, with RDI bit set.

Data Source

GGSN

Source Field

jnxAtmVCOutOAMF5RDICells

Source Section

jnxAtmVCEntry

jnxAtmVCOutPkts

The number of packets sent out on the VC.

Data Source

GGSN

Source Field

jnxAtmVCOutPkts

Source Section

jnxAtmVCEntry

jnxAtmVCTailQueuePktDrops

The number of packets dropped due to bandwidth constraints.

Data Source

GGSN

Source Field

jnxAtmVCTailQueuePktDrops

Source Section

jnxAtmVCEntry

jnxAtmVCTotalDownTime

The total VC down time in seconds ever since the system rebooted.

Data Source

GGSN

Source Field

jnxAtmVCTotalDownTime

Source Section

jnxAtmVCEntry

ss7MessageReceivedPerLinkBb

The number of MSU messages received on this broadband link.

Data Source

SGSN

ss7MessageSentPerLinkBb5

The number of MSU messages sent on this broadband link.

Data Source

SGSN

Source Field

ss7MessageSentPerLinkBb

Source Section

SS7 Broadband Link Counters

ss7OctetsReceivedPerLinkBb

This measurement provides the number of KB received by MTP-L3 on a broadband link. The maximum read interval is 3600 sec.

Data Source

SGSN

Source Field

ss7OctetsReceivedPerLinkBb

Source Section

SS7 Broadband Link Counters

ss7OctetsSentPerLinkBb

This measurement provides the number of KB sent by MTP-L3 on a broadband link. The maximum read interval is 3600 sec.

Data Source

SGSN

Source Field

ss7OctetsSentPerLinkBb

Source Section

SS7 Broadband Link Counters

VirtualPath Primitive Calculations

The following is a list of primitive calculations for the VirtualPath entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UnknownEnterpriseField

Unknown Field exported from Enterprise Server

Calculation

nullInt ()

VirtualPath Peg Counts

The following is a list of peg counts for the VirtualPath entity.

collectionPeriod

Period Length

Data Source

GGSN

Source Field

collectionPeriod

Source Section

VirtualPath General

GSNRelease

Release

Data Source

GGSN

Source Field

GSNRelease

Source Section

VirtualPath General

jnxAtmVpInBytes

The number of bytes received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInBytes

Source Section

jnxAtmVpEntry

jnxAtmVpInOamF4AisCells

The number of OAM F4 AIS cells received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInOamF4AisCells

Source Section

jnxAtmVpEntry

jnxAtmVpInOamF4Cells

The number of OAM F4 cells received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInOamF4Cells

Source Section

jnxAtmVpEntry

jnxAtmVpInOamF4LoopCells

The number of OAM F4 loopback cells received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInOamF4LoopCells

Source Section

jnxAtmVpEntry

jnxAtmVpInOamF4RdiCells

The number of OAM F4 RDI cells received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInOamF4RdiCells

Source Section

jnxAtmVpEntry

jnxAtmVpInPkts

The number of packets received on the VP.

Data Source

GGSN

Source Field

jnxAtmVpInPkts

Source Section

jnxAtmVpEntry

jnxAtmVpOamDownCellCount

The minimum number of consecutive loopback cells to be received to declare that the VP is down.

Data Source

GGSN

Source Field

jnxAtmVpOamDownCellCount

Source Section

jnxAtmVpEntry

jnxAtmVpOamPeriod

This time interval indicates how often the OAM F4 cells are sent to determine the status of the VP.

Data Source

GGSN

Source Field

jnxAtmVpOamPeriod

Source Section

jnxAtmVpEntry

jnxAtmVpOamUpCellCount

The minimum number of consecutive loopback cells to be received to declare that the VP is up.

Data Source

GGSN

Source Field

jnxAtmVpOamUpCellCount

Source Section

jnxAtmVpEntry

jnxAtmVpOutBytes

The number of bytes sent out on the VP.

Data Source

GGSN

Source Field

jnxAtmVpOutBytes

Source Section

jnxAtmVpEntry

jnxAtmVpOutOamF4Cells

The number of OAM F4 cells transmitted on the VP.

Data Source

GGSN

Source Field

jnxAtmVpOutOamF4Cells

Source Section

jnxAtmVpEntry

jnxAtmVpOutOamF4LoopCells

The number of OAM F4 loopback cells transmitted on the VP.

Data Source

GGSN

Source Field

jnxAtmVpOutOamF4LoopCells

Source Section

jnxAtmVpEntry

jnxAtmVpOutOamF4RdiCells

The number of OAM F4 RDI cells transmitted on the VP.

Data Source

GGSN

Source Field

jnxAtmVpOutOamF4RdiCells

Source Section

jnxAtmVpEntry

jnxAtmVpOutPkts

The number of packets sent out on the VP.

Data Source

GGSN

Source Field

jnxAtmVpOutPkts

Source Section

jnxAtmVpEntry

jnxAtmVpTotalDownTime

The total VP downtime in seconds, ever since the system rebooted.

Data Source

GGSN

Source Field

jnxAtmVpTotalDownTime

Source Section

jnxAtmVpEntry

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

7 RNC Traffic Entities

The following figures show the Prospect reporting hierarchy for traffic entities.

Figure 4: Reporting Hierarchy

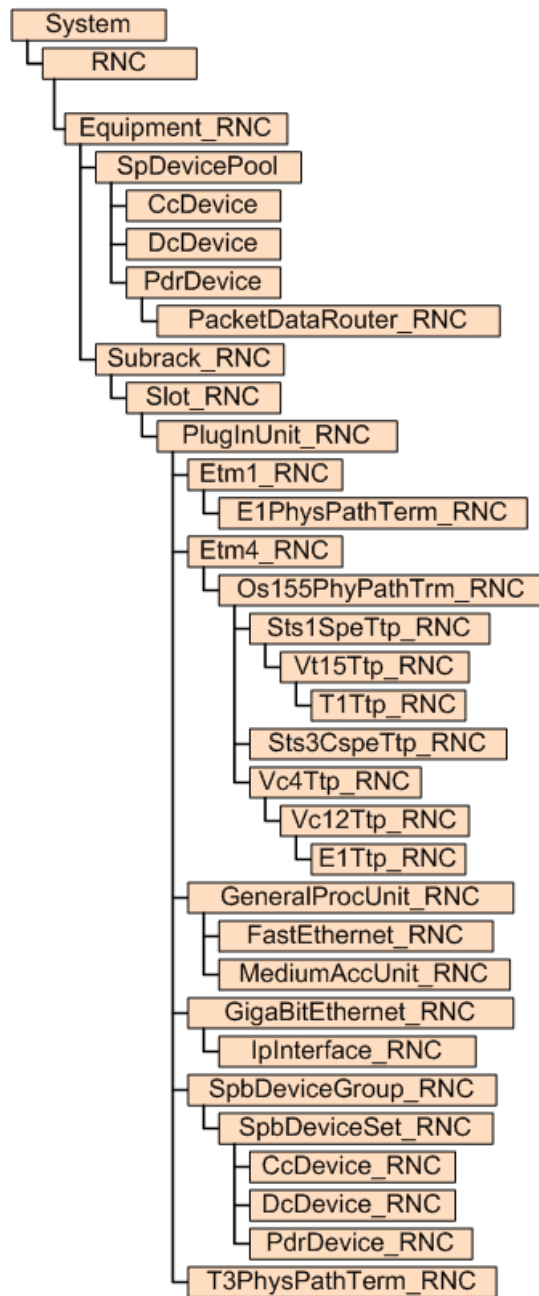


Figure 5: Reporting Hierarchy

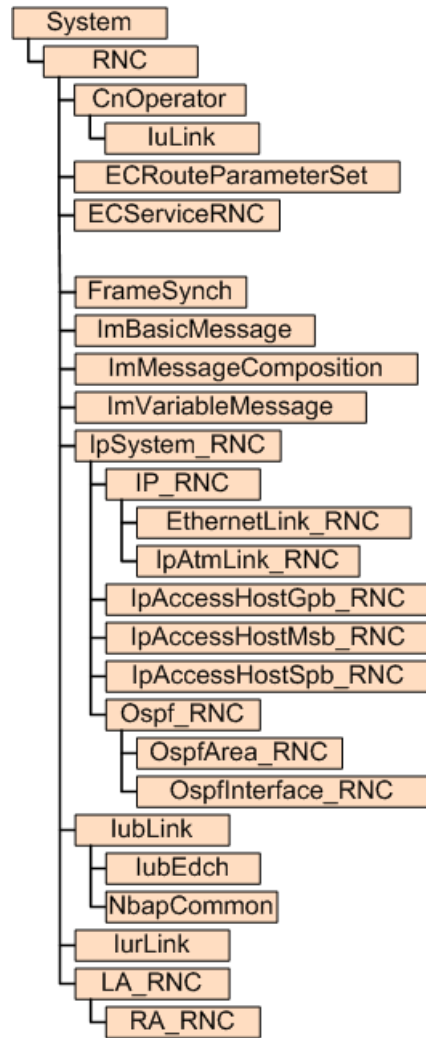


Figure 6: Reporting Hierarchy

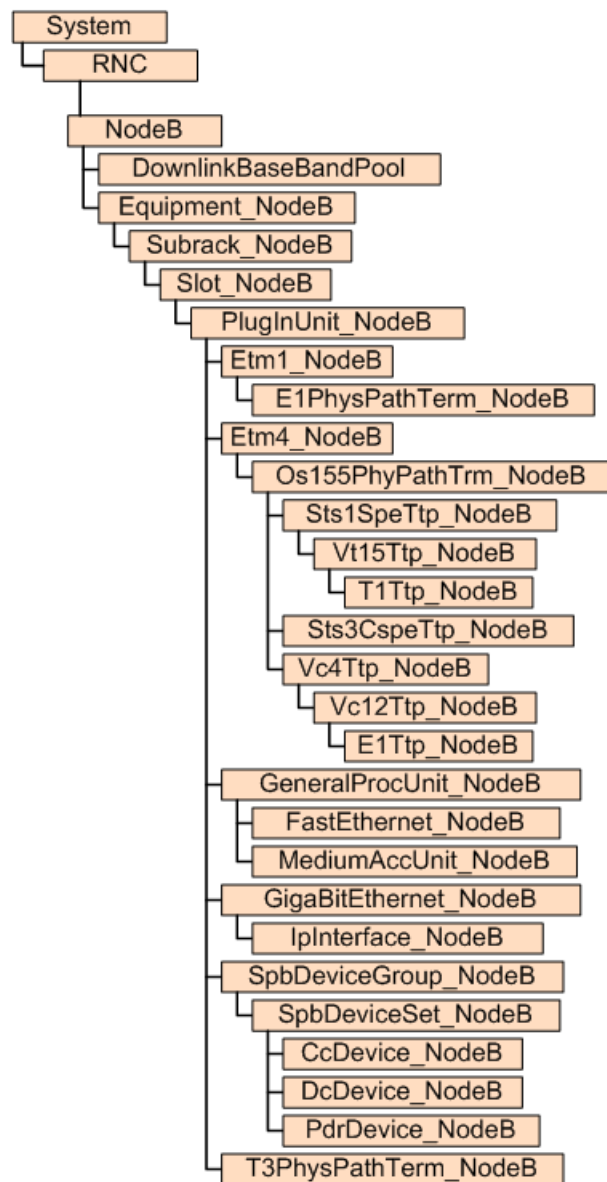


Figure 7: Reporting Hierarchy

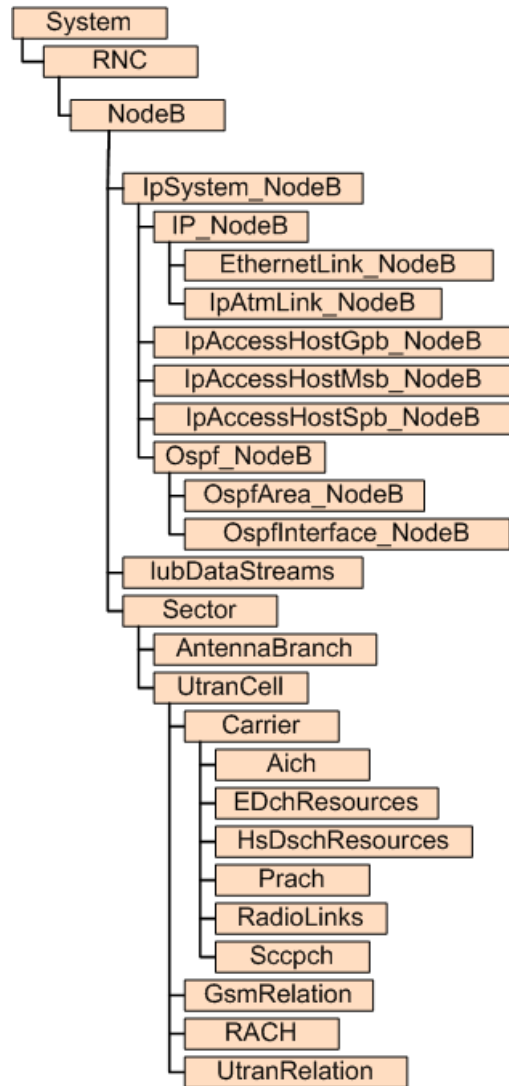


Figure 8: Reporting Hierarchy

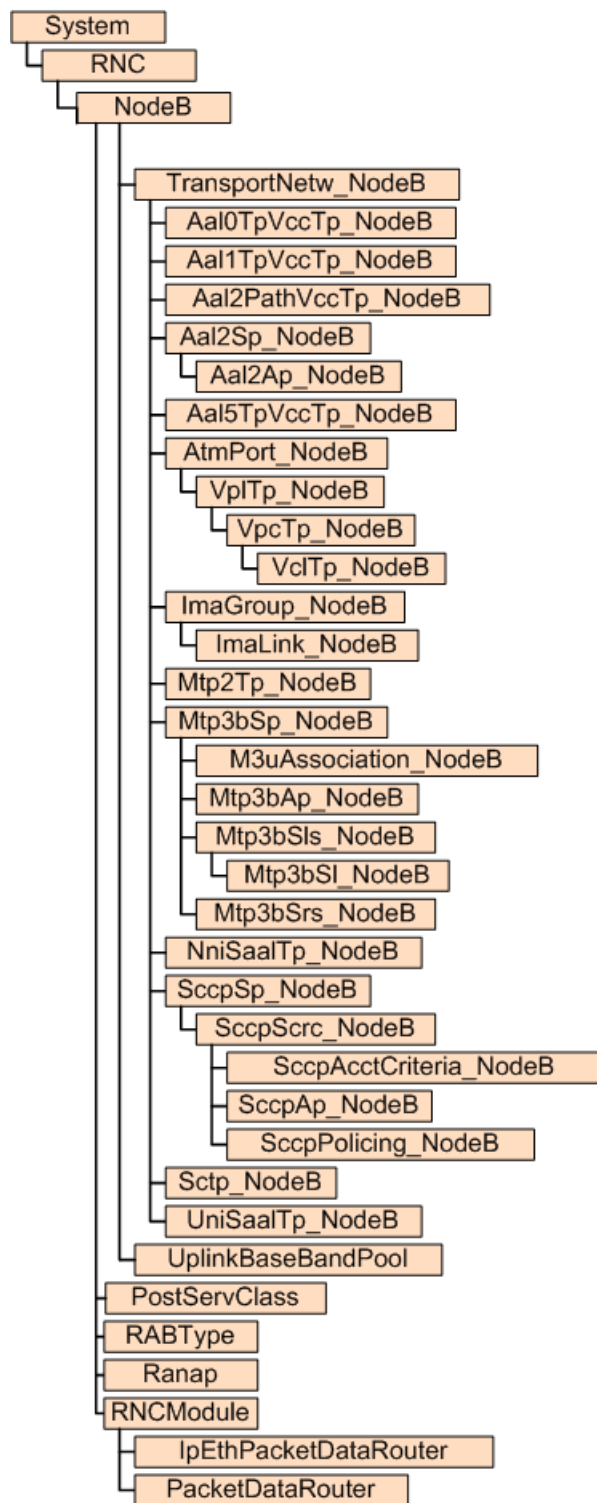


Figure 9: Reporting Hierarchy


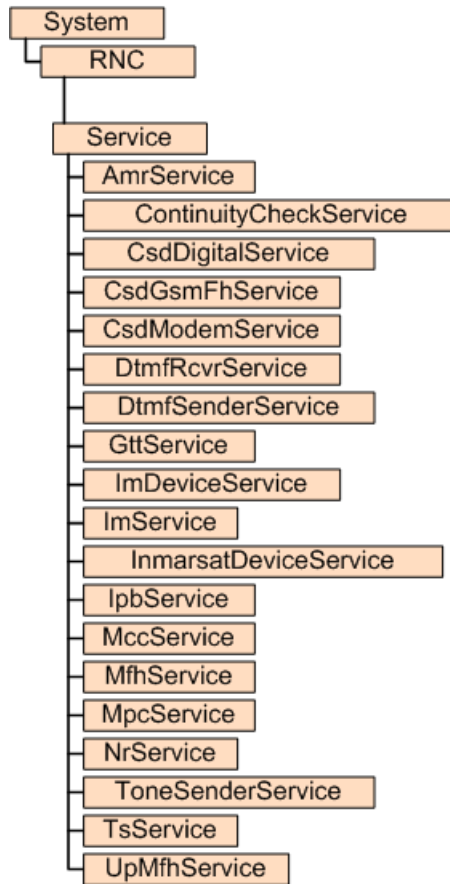


Figure 10: Reporting Hierarchy

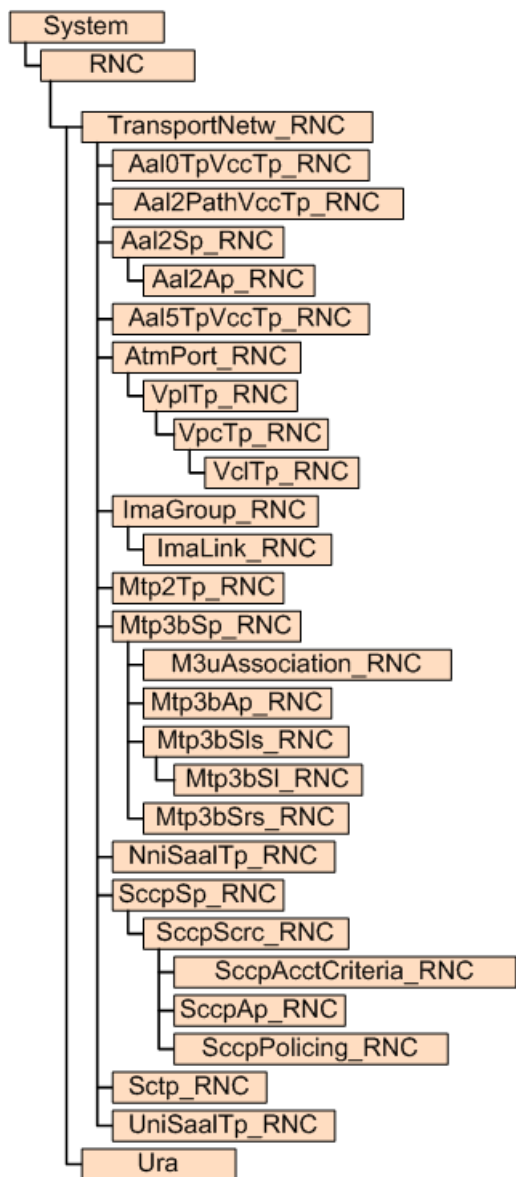

8 RNC Traffic Fields

The following is a list of available Traffic performance data fields.

Aal0TpVccTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal0TpVccTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal0TpVccTp_NodeB Peg Counts

The following is a list of peg counts for the Aal0TpVccTp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal0TpVccTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal0TpVccTp_NodeB_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal0TpVccTp_NodeB

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal0TpVccTp_NodeB

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal0TpVccTp_NodeB

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal0TpVccTp_NodeB

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal0TpVccTp_NodeB

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal0TpVccTp_NodeB

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal0TpVccTp_NodeB

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal0TpVccTp_NodeB

Aal0TpVccTp_RNC Primitive Calculations

The following is a list of primitive calculations for the Aal0TpVccTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal0TpVccTp_RNC Peg Counts

The following is a list of peg counts for the Aal0TpVccTp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal0TpVccTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal0TpVccTp_RNC_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal0TpVccTp_RNC

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal0TpVccTp_RNC

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal0TpVccTp_RNC

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal0TpVccTp_RNC

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal0TpVccTp_RNC

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal0TpVccTp_RNC

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal0TpVccTp_RNC

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal0TpVccTp_RNC

Aal1TpVccTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal1TpVccTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

AalITpVccTp_NodeB Peg Counts

The following is a list of peg counts for the AalITpVccTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

AalITpVccTp

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

AalITpVccTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Aal1TpVccTp_NodeB_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RXI

Source Field

pmBwErrBlocks

Source Section

Aal1TpVccTp

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RXI

Source Field

pmBwLostCells

Source Section

Aal1TpVccTp

pmBwMissinsCells

The total number of misinserted backward cells.

Data Source

NodeB_RXI

Source Field

pmBwMissinsCells

Source Section

AallTpVccTp

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RXI

Source Field

pmFwErrBlocks

Source Section

AallTpVccTp

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RXI

Source Field

pmFwLostCells

Source Section

AallTpVccTp

pmFwMissinsCells

The total number of forward misinserted cells.

Data Source

NodeB_RXI

Source Field

pmFwMissinsCells

Source Section

Aal1TpVccTp

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RXI

Source Field

pmLostBrCells

Source Section

Aal1TpVccTp

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RXI

Source Field

pmLostFpmCells

Source Section

Aal1TpVccTp

Aal2Ap_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal2Ap_NodeB entity.

Aal2_SuccAll_NodeB

The number of successful Aal2 connection establishment requests, incoming and outgoing. The success rate for all connection establishments.

Calculation

`vsum (pmSuccInConnsRemote, pmSuccOutConnsRemote)`

Aal2_UnSuccIn_NodeB

Sum of the rejected incoming Aal2 connection establishment requests. The requests has either rejected by this node, local, by another node, remote.

Calculation

`vsum (pmUnSuccInConnsRemote, pmUnSuccInConnsLocal)`

Aal2_UnSuccOut_NodeB

Sum of the rejected outgoing Aal2 connection establishment requests. The requests has either rejected by this node, local, by another node, remote.

Calculation

`vsum (pmUnSuccInConnsRemote, pmUnSuccInConnsLocal)`

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

Aal2Ap_NodeB Peg Counts

The following is a list of peg counts for the Aal2Ap_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Aal2Ap_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Ap_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Ap_NodeB_WMGeneral

pmExisOrigConns

Number of existing connections for the AP originating in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisOrigConns

Source Section

Aal2Ap_NodeB

pmExisTermConns

Number of existing connections for the AP terminating in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisTermConns

Source Section

Aal2Ap_NodeB

pmExisTransConns

Number of existing connections for the AP transiting in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisTransConns

Source Section

Aal2Ap_NodeB

pmSuccInConnsRemote

Number of successful establishments of incoming connections on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmSuccInConnsRemote

Source Section

Aal2Ap_NodeB

pmSuccInConnsRemoteQosClassA

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccInConnsRemoteQosClassA

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassB

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccInConnsRemoteQosClassB

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassC

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccInConnsRemoteQosClassC

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassD

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccInConnsRemoteQosClassD

Source Section

Aal2Ap

pmSuccOutConnsRemote

Number of successful establishments of outgoing connections on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmSuccOutConnsRemote

Source Section

Aal2Ap_NodeB

pmSuccOutConnsRemoteQosClassA

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccOutConnsRemoteQosClassA

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassB

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccOutConnsRemoteQosClassB

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassC

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccOutConnsRemoteQosClassC

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassD

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmSuccOutConnsRemoteQosClassD

Source Section

Aal2Ap

pmUnRecMessages

Number of received unrecognized Q.2630.1 messages on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmUnRecMessages

Source Section

Aal2Ap_NodeB

pmUnRecParams

Number of received Q.2630.1 messages with unrecognized parameters on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmUnRecParams

Source Section

Aal2Ap_NodeB

pmUnSuccInConnsLocal

Number of unSucc att to allocate Common Part Sub-layer (CPS) resources- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccInConnsLocal

Source Section

Aal2Ap_NodeB

pmUnSuccInConnsLocalQosClassA

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsLocalQosClassA

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassB

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsLocalQosClassB

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassC

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission Control (CAC) between peers.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsLocalQosClassC

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassD

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission Control (CAC) between peers.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsLocalQosClassD

Source Section

Aal2Ap

pmUnSuccInConnsRemote

Number of unSucc estab of inc conn on this AP caused by rejection beyond this node.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccInConnsRemote

Source Section

Aal2Ap_NodeB

pmUnSuccInConnsRemoteQosClassA

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsRemoteQosClassA

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassB

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsRemoteQosClassB

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassC

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsRemoteQosClassC

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassD

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

NodeB_RXI

Source Field

pmUnSuccInConnsRemoteQosClassD

Source Section

Aal2Ap

pmUnSuccOutConnsLocal

Number of unSucc att to allocate CPS resources during establt of out conn on this AP- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccOutConnsLocal

Source Section

Aal2Ap_NodeB

pmUnSuccOutConnsLocalQosClassA

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsLocalQosClassA

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassB

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsLocalQosClassB

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassC

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsLocalQosClassC

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassD

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsLocalQosClassD

Source Section

Aal2Ap

pmUnSuccOutConnsRemote

Number of unSucc estab of out conn on this AP caused by rejection from remote side- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccOutConnsRemote

Source Section

Aal2Ap_NodeB

pmUnSuccOutConnsRemoteQosClassA

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassA

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassB

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassB

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassC

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassC

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassD

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

NodeB_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassD

Source Section

Aal2Ap

Aal2Ap_RNC Primitive Calculations

The following is a list of primitive calculations for the Aal2Ap_RNC entity.

Aal2_SuccAll_RNC

The number of successful Aal2 connection establishment requests, incoming and outgoing. The success rate for all connection establishments.

Calculation

`vsum (pmSuccInConnsRemote, pmSuccOutConnsRemote)`

Aal2_UnSuccIn_RNC

Sum of the rejected incoming Aal2 connection establishment requests. The requests has either rejected by this node, local, by another node, remote.

Calculation

`vsum (pmUnSuccInConnsRemote, pmUnSuccInConnsLocal)`

Aal2_UnSuccOut_RNC

Sum of the rejected outgoing Aal2 connection establishment requests. The requests has either rejected by this node, local, by another node, remote.

Calculation

`vsum (pmUnSuccInConnsRemote, pmUnSuccInConnsLocal)`

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

Aal2Ap_RNC Peg Counts

The following is a list of peg counts for the Aal2Ap_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Ap_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Ap_RNC_WMGeneral

pmExisOrigConns

Number of existing connections for the AP originating in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisOrigConns

Source Section

Aal2Ap_RNC

pmExisTermConns

Number of existing connections for the AP terminating in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisTermConns

Source Section

Aal2Ap_RNC

pmExisTransConns

Number of existing connections for the AP transiting in this node.

Data Source

NodeB_RNC_RXI

Source Field

pmExisTransConns

Source Section

Aal2Ap_RNC

pmSuccInConnsRemote

Number of successful establishments of incoming connections on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmSuccInConnsRemote

Source Section

Aal2Ap_RNC

pmSuccInConnsRemoteQosClassA

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccInConnsRemoteQosClassA

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassB

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccInConnsRemoteQosClassB

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassC

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccInConnsRemoteQosClassC

Source Section

Aal2Ap

pmSuccInConnsRemoteQosClassD

Number of successful establishments of incoming connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccInConnsRemoteQosClassD

Source Section

Aal2Ap

pmSuccOutConnsRemote

Number of successful establishments of outgoing connections on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmSuccOutConnsRemote

Source Section

Aal2Ap_RNC

pmSuccOutConnsRemoteQosClassA

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccOutConnsRemoteQosClassA

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassB

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccOutConnsRemoteQosClassB

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassC

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccOutConnsRemoteQosClassC

Source Section

Aal2Ap

pmSuccOutConnsRemoteQosClassD

Number of successful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmSuccOutConnsRemoteQosClassD

Source Section

Aal2Ap

pmUnRecMessages

Number of received unrecognized Q.2630.1 messages on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmUnRecMessages

Source Section

Aal2Ap_RNC

pmUnRecParams

Number of received Q.2630.1 messages with unrecognized parameters on this AP.

Data Source

NodeB_RNC_RXI

Source Field

pmUnRecParams

Source Section

Aal2Ap_RNC

pmUnSuccInConnsLocal

Number of unSucc att to allocate Common Part Sub-layer (CPS) resources- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccInConnsLocal

Source Section

Aal2Ap_RNC

pmUnSuccInConnsLocalQosClassA

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsLocalQosClassA

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassB

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsLocalQosClassB

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassC

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission Control (CAC) between peers.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsLocalQosClassC

Source Section

Aal2Ap

pmUnSuccInConnsLocalQosClassD

Number of unsuccessful attempts to allocate AAL2 path resources (Common Part Sublayer) during establishment of incoming connections on this Access Point (AP) caused by Channel Identifier (CID) and/or bandwidth collision or mismatch of Call Admission Control (CAC) between peers.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsLocalQosClassD

Source Section

Aal2Ap

pmUnSuccInConnsRemote

Number of unSucc estab of inc conn on this AP caused by rejection beyond this node.- Retired
fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccInConnsRemote

Source Section

Aal2Ap_RNC

pmUnSuccInConnsRemoteQosClassA

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point
caused by the reject from the AAL2 Access Point in the remote node.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsRemoteQosClassA

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassB

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point
caused by the reject from the AAL2 Access Point in the remote node.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsRemoteQosClassB

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassC

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsRemoteQosClassC

Source Section

Aal2Ap

pmUnSuccInConnsRemoteQosClassD

Number of unsuccessful establishments of incoming connections on this AAL2 Access Point caused by the reject from the AAL2 Access Point in the remote node.

Data Source

RNC_RXI

Source Field

pmUnSuccInConnsRemoteQosClassD

Source Section

Aal2Ap

pmUnSuccOutConnsLocal

Number of unSucc att to allocate CPS resources during estabt of out conn on this AP- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccOutConnsLocal

Source Section

Aal2Ap_RNC

pmUnSuccOutConnsLocalQosClassA

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsLocalQosClassA

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassB

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsLocalQosClassB

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassC

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsLocalQosClassC

Source Section

Aal2Ap

pmUnSuccOutConnsLocalQosClassD

Number of unsuccessful attempts to allocate AAL2 resources (Common Part sublayer) during establishment of outgoing connections on this Access Point (AP). Caused by Rejects in Connections Admission Control (CAC).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsLocalQosClassD

Source Section

Aal2Ap

pmUnSuccOutConnsRemote

Number of unSucc estab of out conn on this AP caused by rejection from remote side- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUnSuccOutConnsRemote

Source Section

Aal2Ap_RNC

pmUnSuccOutConnsRemoteQosClassA

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassA

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassB

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassB

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassC

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassC

Source Section

Aal2Ap

pmUnSuccOutConnsRemoteQosClassD

Number of unsuccessful establishments of outgoing connections on this AAL2 Access Point (AP).

Data Source

RNC_RXI

Source Field

pmUnSuccOutConnsRemoteQosClassD

Source Section

Aal2Ap

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Aal2Ap_RNC

Aal2PathVccTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal2PathVccTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

Aal2PathVccTp_NodeB Peg Counts

The following is a list of peg counts for the Aal2PathVccTp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2PathVccTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2PathVccTp_NodeB_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal2PathVccTp_NodeB

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal2PathVccTp_NodeB

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal2PathVccTp_NodeB

pmDiscardedEgressCpsPackets

Number of discarded AAL2 Common Part Sublayer (CPS) packets in egress direction

Data Source

NodeB_RXI

Source Field

pmDiscardedEgressCpsPackets

Source Section

Aal2PathVccTp

pmEgressCpsPackets

Number of AAL2 Common Part Sublayer (CPS) egress packets sent

Data Source

NodeB_RXI

Source Field

pmEgressCpsPackets

Source Section

Aal2PathVccTp

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal2PathVccTp_NodeB

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal2PathVccTp_NodeB

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal2PathVccTp_NodeB

pmIngressCpsPackets

Number of AAL2 Common Part Sublayer (CPS) ingress packets received

Data Source

NodeB_RXI

Source Field

pmIngressCpsPackets

Source Section

Aal2PathVccTp

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal2PathVccTp_NodeB

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal2PathVccTp_NodeB

Aal2PathVccTp_RNC Primitive Calculations

The following is a list of primitive calculations for the Aal2PathVccTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal2PathVccTp_RNC Peg Counts

The following is a list of peg counts for the Aal2PathVccTp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2PathVccTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2PathVccTp_RNC_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal2PathVccTp_RNC

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal2PathVccTp_RNC

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal2PathVccTp_RNC

pmDiscardedEgressCpsPackets

Number of discarded AAL2 Common Part Sublayer (CPS) packets in egress direction

Data Source

RNC_RXI

Source Field

pmDiscardedEgressCpsPackets

Source Section

Aal2PathVccTp

pmEgressCpsPackets

Number of AAL2 Common Part Sublayer (CPS) egress packets sent

Data Source

RNC_RXI

Source Field

pmEgressCpsPackets

Source Section

Aal2PathVccTp

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal2PathVccTp_RNC

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal2PathVccTp_RNC

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal2PathVccTp_RNC

pmIngressCpsPackets

Number of AAL2 Common Part Sublayer (CPS) ingress packets received

Data Source

RNC_RXI

Source Field

pmIngressCpsPackets

Source Section

Aal2PathVccTp

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal2PathVccTp_RNC

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal2PathVccTp_RNC

Aal2Sp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal2Sp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal2Sp_NodeB Peg Counts

The following is a list of peg counts for the Aal2Sp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Aal2Sp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Sp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Sp_NodeB_WMGeneral

pmUnsuccessfulConnsInternal

Number of unSucc attempts to establish connections due to node internal problems.

Data Source

NodeB_RNC_RXI

Source Field

pmUnsuccessfulConnsInternal

Source Section

Aal2Sp_NodeB

Aal2Sp_RNC Primitive Calculations

The following is a list of primitive calculations for the Aal2Sp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal2Sp_RNC Peg Counts

The following is a list of peg counts for the Aal2Sp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Sp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal2Sp_RNC_WMGeneral

pmUnsuccessfulConnsInternal

Number of unSucc attempts to establish connections due to node internal problems.

Data Source

NodeB_RNC_RXI

Source Field

pmUnsuccessfulConnsInternal

Source Section

Aal2Sp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Aal2Sp_RNC

Aal5TpVccTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Aal5TpVccTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal5TpVccTp_NodeB Peg Counts

The following is a list of peg counts for the Aal5TpVccTp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal5TpVccTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal5TpVccTp_NodeB_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal5TpVccTp_NodeB

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal5TpVccTp_NodeB

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal5TpVccTp_NodeB

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal5TpVccTp_NodeB

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal5TpVccTp_NodeB

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal5TpVccTp_NodeB

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal5TpVccTp_NodeB

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal5TpVccTp_NodeB

Aal5TpVccTp_RNC Primitive Calculations

The following is a list of primitive calculations for the Aal5TpVccTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aal5TpVccTp_RNC Peg Counts

The following is a list of peg counts for the Aal5TpVccTp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal5TpVccTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aal5TpVccTp_RNC_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

Aal5TpVccTp_RNC

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

Aal5TpVccTp_RNC

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

Aal5TpVccTp_RNC

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

Aal5TpVccTp_RNC

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

Aal5TpVccTp_RNC

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

Aal5TpVccTp_RNC

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

Aal5TpVccTp_RNC

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

Aal5TpVccTp_RNC

Aich Primitive Calculations

The following is a list of primitive calculations for the Aich entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Aich Peg Counts

The following is a list of peg counts for the Aich entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Aich

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Aich_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

Aich_WMGeneral

pmNegativeMessages

Number of negative AI messages sent on AICH

Data Source

NodeB_RNC_RXI

Source Field

pmNegativeMessages

Source Section

Aich

pmPositiveMessages

Number of positive AI messages sent on AICH

Data Source

NodeB_RNC_RXI

Source Field

pmPositiveMessages

Source Section

Aich

AmrService Primitive Calculations

The following is a list of primitive calculations for the AmrService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

AmrService Peg Counts

The following is a list of peg counts for the AmrService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

AmrService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

AmrService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

AmrService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

AmrService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

AmrService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

AmrService_Gen

AntennaBranch Primitive Calculations

The following is a list of primitive calculations for the AntennaBranch entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

AntennaBranch Peg Counts

The following is a list of peg counts for the AntennaBranch entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

AntennaBranch

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

AntennaBranch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

AntennaBranch_WMGeneral

pmNoOfPowLimSlots

The number of power limited slots measured on RFIF in the Antenna branch (by the Mean Power Limiter funct in the RBS)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfPowLimSlots

Source Section

AntennaBranch

AtmPort_NodeB Primitive Calculations

The following is a list of primitive calculations for the AtmPort_NodeB entity.

Avr_CellRate_Recieved_AtPort_NodeB

Average Received CellRate in the measurement period.

Calculation

pmReceivedAtmCells / PERLENSEC

Avr_CellRate_Transmitted_AtPort_NodeB

Average Transmitted CellRate in the measurement period.

Calculation

pmTransmittedAtmCells / PERLENSEC

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

AtmPort_NodeB Peg Counts

The following is a list of peg counts for the AtmPort_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

AtmPort_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

AtmPort_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

AtmPort_NodeB_WMGeneral

pmReceivedAtmCells

Number of received ATM cells through the ATM port.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

AtmPort_NodeB

pmSecondsWithUnexp

Errored sec with discarded cells due to protocol errors unexpected UNEX events

Data Source

NodeB_RNC_RXI

Source Field

pmSecondsWithUnexp

Source Section

AtmPort_NodeB

pmTransmittedAtmCells

Number of transmitted ATM cells through the ATM port.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

AtmPort_NodeB

AtmPort_RNC Primitive Calculations

The following is a list of primitive calculations for the AtmPort_RNC entity.

Avr_CellRate_Recieved_AtPort_RNC

Average Received CellRate in the measurement period.

Calculation

pmReceivedAtmCells / PERLENSEC

Avr_CellRate_Transmitted_AtPort_RNC

Average Transmitted CellRate in the measurement period.

Calculation

pmTransmittedAtmCells / PERLENSEC

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

AtmPort_RNC Peg Counts

The following is a list of peg counts for the AtmPort_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

AtmPort_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

AtmPort_RNC_WMGeneral

pmReceivedAtmCells

Number of received ATM cells through the ATM port.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

AtmPort_RNC

pmSecondsWithUnexp

Errored sec with discarded cells due to protocol errors unexpected UNEX events

Data Source

NodeB_RNC_RXI

Source Field

pmSecondsWithUnexp

Source Section

AtmPort_RNC

pmTransmittedAtmCells

Number of transmitted ATM cells through the ATM port.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

AtmPort_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

AtmPort_RNC

Carrier Primitive Calculations

The following is a list of primitive calculations for the Carrier entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

k_CARR_PWR_DL_AVE

Average carrier downlink transmit power (pmTransmittedCarrierPower)

Calculation

```
vsum(0.0 * pmTXCarPwr_000,0.25 * pmTXCarPwr_001,0.75 * pmTXCarPwr_002,1.25  
* pmTXCarPwr_003,1.75 * pmTXCarPwr_004,2.25 * pmTXCarPwr_005,2.75 *  
pmTXCarPwr_006,3.25 * pmTXCarPwr_007,3.75 * pmTXCarPwr_008,4.25 *  
pmTXCarPwr_009,4.75 * pmTXCarPwr_010,5.25 * pmTXCarPwr_011,5.75 *  
pmTXCarPwr_012,6.25 * pmTXCarPwr_013,6.75 * pmTXCarPwr_014,7.25 *  
pmTXCarPwr_015,7.75 * pmTXCarPwr_016,8.25 * pmTXCarPwr_017,8.75 *  
pmTXCarPwr_018,9.25 * pmTXCarPwr_019,9.75 * pmTXCarPwr_020,10.25 *  
pmTXCarPwr_021,10.75 * pmTXCarPwr_022,11.25 * pmTXCarPwr_023,11.75 *  
pmTXCarPwr_024,12.25 * pmTXCarPwr_025,12.75 * pmTXCarPwr_026,13.25 *  
pmTXCarPwr_027,13.75 * pmTXCarPwr_028,14.25 * pmTXCarPwr_029,14.75 *  
pmTXCarPwr_030,15.25 * pmTXCarPwr_031,15.75 * pmTXCarPwr_032,16.25 *  
pmTXCarPwr_033,16.75 * pmTXCarPwr_034,17.25 * pmTXCarPwr_035,17.75 *  
pmTXCarPwr_036,18.25 * pmTXCarPwr_037,18.75 * pmTXCarPwr_038,19.25 *  
pmTXCarPwr_039,19.75 * pmTXCarPwr_040,20.25 * pmTXCarPwr_041,20.75 *  
pmTXCarPwr_042,21.25 * pmTXCarPwr_043,21.75 * pmTXCarPwr_044,22.25 *  
pmTXCarPwr_045,22.75 * pmTXCarPwr_046,23.25 * pmTXCarPwr_047,23.75 *  
pmTXCarPwr_048,24.25 * pmTXCarPwr_049,24.75 * pmTXCarPwr_050,25.25 *  
pmTXCarPwr_051,25.75 * pmTXCarPwr_052,26.25 * pmTXCarPwr_053,26.75 *  
pmTXCarPwr_054,27.25 * pmTXCarPwr_055,27.75 * pmTXCarPwr_056,28.25 *  
pmTXCarPwr_057,28.75 * pmTXCarPwr_058,29.25 * pmTXCarPwr_059,29.75 *  
pmTXCarPwr_060,30.25 * pmTXCarPwr_061,30.75 * pmTXCarPwr_062,31.25 *  
pmTXCarPwr_063,31.75 * pmTXCarPwr_064,32.25 * pmTXCarPwr_065,32.75 *  
pmTXCarPwr_066,33.25 * pmTXCarPwr_067,33.75 * pmTXCarPwr_068,34.25 *  
pmTXCarPwr_069,34.75 * pmTXCarPwr_070,35.25 * pmTXCarPwr_071,35.75 *  
pmTXCarPwr_072,36.25 * pmTXCarPwr_073,36.75 * pmTXCarPwr_074,37.25 *  
pmTXCarPwr_075,37.75 * pmTXCarPwr_076,38.25 * pmTXCarPwr_077,38.75 *  
pmTXCarPwr_078,39.25 * pmTXCarPwr_079,39.75 * pmTXCarPwr_080,40.25 *  
pmTXCarPwr_081,40.75 * pmTXCarPwr_082,41.25 * pmTXCarPwr_083,41.75 *  
pmTXCarPwr_084,42.25 * pmTXCarPwr_085,42.75 * pmTXCarPwr_086,43.25 *  
pmTXCarPwr_087,43.75 * pmTXCarPwr_088,44.25 * pmTXCarPwr_089,44.75 *  
pmTXCarPwr_090,45.25 * pmTXCarPwr_091,45.75 * pmTXCarPwr_092,46.25 *  
pmTXCarPwr_093,46.75 * pmTXCarPwr_094,47.25 * pmTXCarPwr_095,47.75 *  
pmTXCarPwr_096,48.25 * pmTXCarPwr_097,48.75 * pmTXCarPwr_098,49.25 *  
pmTXCarPwr_099,49.75 * pmTXCarPwr_100,50.25 * pmTXCarPwr_101,50.75 *  
pmTXCarPwr_102) /  
vsum(pmTXCarPwr_000,pmTXCarPwr_001,pmTXCarPwr_002,pmTXCarPwr_003,pmTXCarPwr_004,pmTXCarPwr_005,pmTXCarPwr_006,pmTXCarPwr_007,pmTXCarPwr_008,pmTXCarPwr_009,pmTXCarPwr_010,pmTXCarPwr_011,pmTXCarPwr_012,pmTXCarPwr_013,pmTXCarPwr_014,pmTXCarPwr_015,pmTXCarPwr_016,pmTXCarPwr_017,pmTXCarPwr_018,pmTXCarPwr_019,pmTXCarPwr_020,pmTXCarPwr_021,pmTXCarPwr_022,pmTXCarPwr_023,pmTXCarPwr_024,pmTXCarPwr_025,pmTXCarPwr_026,pmTXCarPwr_027,pmTXCarPwr_028,pmTXCarPwr_029,pmTXCarPwr_030,pmTXCarPwr_031,pmTXCarPwr_032,pmTXCarPwr_033,pmTXCarPwr_034,pmTXCarPwr_035,pmTXCarPwr_036,pmTXCarPwr_037,pmTXCarPwr_038,pmTXCarPwr_039,pmTXCarPwr_040,pmTXCarPwr_041,pmTXCarPwr_042,pmTXCarPwr_043,pmTXCarPwr_044,pmTXCarPwr_045,pmTXCarPwr_046,pmTXCarPwr_047,pmTXCarPwr_048,pmTXCarPwr_049,pmTXCarPwr_050,pmTXCarPwr_051,pmTXCarPwr_052,pmTXCarPwr_053,pmTXCarPwr_054,pmTXCarPwr_055,pmTXCarPwr_056,pmTXCarPwr_057,pmTXCarPwr_058,pmTXCarPwr_059,pmTXCarPwr_060,pmTXCarPwr_061,pmTXCarPwr_062,pmTXCarPwr_063,pmTXCarPwr_064,pmTXCarPwr_065,pmTXCarPwr_066,pmTXCarPwr_067,pmTXCarPwr_068,pmTXCarPwr_069,pmTXCarPwr_070,pmTXCarPwr_071,pmTXCarPwr_072,pmTXCarPwr_073,pmTXCarPwr_074,pmTXCarPwr_075,pmTXCarPwr_076,pmTXCarPwr_077,pmTXCarPwr_078,pmTXCarPwr_079,pmTXCarPwr_080,pmTXCarPwr_081,pmTXCarPwr_082,pmTXCarPwr_083,pmTXCarPwr_084,pmTXCarPwr_085,pmTXCarPwr_086,pmTXCarPwr_087,pmTXCarPwr_088,pmTXCarPwr_089,pmTXCarPwr_090,pmTXCarPwr_091,pmTXCarPwr_092,pmTXCarPwr_093,pmTXCarPwr_094,pmTXCarPwr_095,pmTXCarPwr_096,pmTXCarPwr_097,pmTXCarPwr_098,pmTXCarPwr_099,pmTXCarPwr_100,pmTXCarPwr_101,pmTXCarPwr_102)
```

Updated: 2008-01-07

XCarPwr_034,pmTXCarPwr_035,pmTXCarPwr_036,pmTXCarPwr_037,pmTXCarPwr_038,pmTXCarPwr_039,pmTXCarPwr_040,pmTXCarPwr_041,pmTXCarPwr_042,pmTXCarPwr_043,pmTXCarPwr_044,pmTXCarPwr_045,pmTXCarPwr_046,pmTXCarPwr_047,pmTXCarPwr_048,pmTXCarPwr_049,pmTXCarPwr_050,pmTXCarPwr_051,pmTXCarPwr_052,pmTXCarPwr_053,pmTXCarPwr_054,pmTXCarPwr_055,pmTXCarPwr_056,pmTXCarPwr_057,pmTXCarPwr_058,pmTXCarPwr_059,pmTXCarPwr_060,pmTXCarPwr_061,pmTXCarPwr_062,pmTXCarPwr_063,pmTXCarPwr_064,pmTXCarPwr_065,pmTXCarPwr_066,pmTXCarPwr_067,pmTXCarPwr_068,pmTXCarPwr_069,pmTXCarPwr_070,pmTXCarPwr_071,pmTXCarPwr_072,pmTXCarPwr_073,pmTXCarPwr_074,pmTXCarPwr_075,pmTXCarPwr_076,pmTXCarPwr_077,pmTXCarPwr_078,pmTXCarPwr_079,pmTXCarPwr_080,pmTXCarPwr_081,pmTXCarPwr_082,pmTXCarPwr_083,pmTXCarPwr_084,pmTXCarPwr_085,pmTXCarPwr_086,pmTXCarPwr_087,pmTXCarPwr_088,pmTXCarPwr_089,pmTXCarPwr_090,pmTXCarPwr_091,pmTXCarPwr_092,pmTXCarPwr_093,pmTXCarPwr_094,pmTXCarPwr_095,pmTXCarPwr_096,pmTXCarPwr_097,pmTXCarPwr_098,pmTXCarPwr_099,pmTXCarPwr_100,pmTXCarPwr_101,pmTXCarPwr_102)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

pmAverageRssiP5MD_00

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range < -110.0dBm

Calculation

pmAverageRssi_00

pmAverageRssiP5MD_01

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -110.0..-109.5dBm

Calculation

pmAverageRssi_01

pmAverageRssiP5MD_02

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -109.5..-109.0dBm

Calculation

`pmAverageRssi_02`

pmAverageRssiP5MD_03

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -109.0..-108.5dBm

Calculation

`pmAverageRssi_03`

pmAverageRssiP5MD_04

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -108.5..-108.0dBm

Calculation

`pmAverageRssi_04`

pmAverageRssiP5MD_05

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -108.0..-107.5dBm

Calculation

`pmAverageRssi_05`

pmAverageRssiP5MD_06

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -107.5..-107.0dBm

Calculation

`pmAverageRssi_06`

pmAverageRssiP5MD_07

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -107.0..-106.5dBm

Calculation

`pmAverageRssi_07`

pmAverageRssiP5MD_08

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -106.5..-106.0dBm

Calculation

`pmAverageRssi_08`

pmAverageRssiP5MD_09

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -106.0..-105.5dBm

Calculation

`pmAverageRssi_09`

pmAverageRssiP5MD_10

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -105.5..-105.0dBm

Calculation

`pmAverageRssi_10`

pmAverageRssiP5MD_11

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -105.0..-104.5dBm

Calculation

`pmAverageRssi_11`

pmAverageRssiP5MD_12

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -104.5..-104.0dBm

Calculation

`pmAverageRssi_12`

pmAverageRssiP5MD_13

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -104.0..-103.5dBm

Calculation

`pmAverageRssi_13`

pmAverageRssiP5MD_14

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -103.5..-103.0dBm

Calculation

`pmAverageRssi_14`

pmAverageRssiP5MD_15

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -103.0..-102.5dBm

Calculation

`pmAverageRssi_15`

pmAverageRssiP5MD_16

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -102.5..-102.0dBm

Calculation

`pmAverageRssi_16`

pmAverageRssiP5MD_17

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -102.0..-101.5dBm

Calculation

`pmAverageRssi_17`

pmAverageRssiP5MD_18

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -101.5..-101.0dBm

Calculation

`pmAverageRssi_18`

pmAverageRssiP5MD_19

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -101.0..-100.5dBm

Calculation

`pmAverageRssi_19`

pmAverageRssiP5MD_20

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -100.5..-100.0dBm

Calculation

`pmAverageRssi_20`

pmAverageRssiP5MD_21

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -100.0..-99.5dBm

Calculation

`pmAverageRssi_21`

pmAverageRssiP5MD_22

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -99.5..-99.0dBm

Calculation

`pmAverageRssi_22`

pmAverageRssiP5MD_23

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -99.0..-98.5dBm

Calculation

`pmAverageRssi_23`

pmAverageRssiP5MD_24

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -98.5..-98.0dBm

Calculation

`pmAverageRssi_24`

pmAverageRssiP5MD_25

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -98.0..-97.5dBm

Calculation

`pmAverageRssi_25`

pmAverageRssiP5MD_26

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -97.5..-97.0dBm

Calculation

`pmAverageRssi_26`

pmAverageRssiP5MD_27

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -97.0..-96.5dBm

Calculation

`pmAverageRssi_27`

pmAverageRssiP5MD_28

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -96.5..-96.0dBm

Calculation

`pmAverageRssi_28`

pmAverageRssiP5MD_29

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -96.0..-95.5dBm

Calculation

`pmAverageRssi_29`

pmAverageRssiP5MD_30

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -95.5..-95.0dBm

Calculation

`pmAverageRssi_30`

pmAverageRssiP5MD_31

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -95.0..-94.5dBm

Calculation

`pmAverageRssi_31`

pmAverageRssiP5MD_32

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -94.5..-94.0dBm

Calculation

`pmAverageRssi_32`

pmAverageRssiP5MD_33

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -94.0..-93.5dBm

Calculation

`pmAverageRssi_33`

pmAverageRssiP5MD_34

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -93.5..-93.0dBm

Calculation

`pmAverageRssi_34`

pmAverageRssiP5MD_35

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -93.0..-92.5dBm

Calculation

`pmAverageRssi_35`

pmAverageRssiP5MD_36

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -92.5..-92.0dBm

Calculation

`pmAverageRssi_36`

pmAverageRssiP5MD_37

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -92.0..-91.5dBm

Calculation

`pmAverageRssi_37`

pmAverageRssiP5MD_38

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -91.5..-91.0dBm

Calculation

`pmAverageRssi_38`

pmAverageRssiP5MD_39

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -91.0..-90.5dBm

Calculation

`pmAverageRssi_39`

pmAverageRssiP5MD_40

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -90.5..-90.0dBm

Calculation

`pmAverageRssi_40`

pmAverageRssiP5MD_41

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -90.0..-89.5dBm

Calculation

`pmAverageRssi_41`

pmAverageRssiP5MD_42

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -89.5..-89.0dBm

Calculation

`pmAverageRssi_42`

pmAverageRssiP5MD_43

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -89.0..-88.5dBm

Calculation

`pmAverageRssi_43`

pmAverageRssiP5MD_44

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -88.5..-88.0dBm

Calculation

`pmAverageRssi_44`

pmAverageRssiP5MD_45

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -88.0..-87.5dBm

Calculation

`pmAverageRssi_45`

pmAverageRssiP5MD_46

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -87.5..-87.0dBm

Calculation

`pmAverageRssi_46`

pmAverageRssiP5MD_47

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -87.0..-86.5dBm

Calculation

`pmAverageRssi_47`

pmAverageRssiP5MD_48

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -86.5..-86.0dBm

Calculation

`pmAverageRssi_48`

pmAverageRssiP5MD_49

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -86.0..-85.5dBm

Calculation

`pmAverageRssi_49`

pmAverageRssiP5MD_50

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -85.5..-85.0dBm

Calculation

`pmAverageRssi_50`

pmAverageRssiP5MD_51

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -85.0..-84.5dBm

Calculation

`pmAverageRssi_51`

pmAverageRssiP5MD_52

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -84.5..-84.0dBm

Calculation

`pmAverageRssi_52`

pmAverageRssiP5MD_53

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -84.0..-83.5dBm

Calculation

`pmAverageRssi_53`

pmAverageRssiP5MD_54

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -83.5..-83.0dBm

Calculation

`pmAverageRssi_54`

pmAverageRssiP5MD_55

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -83.0..-82.5dBm

Calculation

`pmAverageRssi_55`

pmAverageRssiP5MD_56

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -82.5..-82.0dBm

Calculation

`pmAverageRssi_56`

pmAverageRssiP5MD_57

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -82.0..-81.5dBm

Calculation

`pmAverageRssi_57`

pmAverageRssiP5MD_58

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -81.5..-81.0dBm

Calculation

`pmAverageRssi_58`

pmAverageRssiP5MD_59

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -81.0..-80.5dBm

Calculation

`pmAverageRssi_59`

pmAverageRssiP5MD_60

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -80.5..-80.0dBm

Calculation

`pmAverageRssi_60`

pmTxCarrierPowerP5MD_02

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 25.5..26dBm

Calculation

`pmTXCarPwr_052`

pmTxCarrierPowerP5MD_03

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 26..26.5dBm

Calculation

pmTXCarPwr_053

pmTxCarrierPowerP5MD_04

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 26.5..27dBm

Calculation

pmTXCarPwr_054

pmTxCarrierPowerP5MD_05

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 27..27.5dBm

Calculation

pmTXCarPwr_055

pmTxCarrierPowerP5MD_06

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 27.5..28dBm

Calculation

pmTXCarPwr_056

pmTxCarrierPowerP5MD_07

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 28..28.5dBm

Calculation

pmTXCarPwr_057

pmTxCarrierPowerP5MD_08

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 28.5..29dBm

Calculation

pmTXCarPwr_058

pmTxCarrierPowerP5MD_09

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 29..29.5dBm

Calculation

pmTXCarPwr_059

pmTxCarrierPowerP5MD_10

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 29.5..30dBm

Calculation

pmTXCarPwr_060

pmTxCarrierPowerP5MD_11

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 30..30.5dBm

Calculation

pmTXCarPwr_061

pmTxCarrierPowerP5MD_12

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 30.5..31dBm

Calculation

pmTXCarPwr_062

pmTxCarrierPowerP5MD_13

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 31..31.5dBm

Calculation

pmTXCarPwr_063

pmTxCarrierPowerP5MD_14

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 31.5..32dBm

Calculation

pmTXCarPwr_064

pmTxCarrierPowerP5MD_15

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 32..32.5dBm

Calculation

pmTXCarPwr_065

pmTxCarrierPowerP5MD_16

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 32.5..33dBm

Calculation

pmTXCarPwr_066

pmTxCarrierPowerP5MD_17

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 33..33.5dBm

Calculation

pmTXCarPwr_067

pmTxCarrierPowerP5MD_18

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 33.5..34dBm

Calculation

pmTXCarPwr_068

pmTxCarrierPowerP5MD_19

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 34..34.5dBm

Calculation

pmTXCarPwr_069

pmTxCarrierPowerP5MD_20

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 34.5..35dBm

Calculation

pmTXCarPwr_070

pmTxCarrierPowerP5MD_21

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 35..35.5dBm

Calculation

pmTXCarPwr_071

pmTxCarrierPowerP5MD_22

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 35.5..36dBm

Calculation

pmTXCarPwr_072

pmTxCarrierPowerP5MD_23

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 36..36.5dBm

Calculation

pmTXCarPwr_073

pmTxCarrierPowerP5MD_24

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 36.5..37dBm

Calculation

pmTXCarPwr_074

pmTxCarrierPowerP5MD_25

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 37..37.5dBm

Calculation

pmTXCarPwr_075

pmTxCarrierPowerP5MD_26

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 37.5..38dBm

Calculation

pmTXCarPwr_076

pmTxCarrierPowerP5MD_27

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 38..38.5dBm

Calculation

pmTXCarPwr_077

pmTxCarrierPowerP5MD_28

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 38.5..39dBm

Calculation

pmTXCarPwr_078

pmTxCarrierPowerP5MD_29

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 39..39.5dBm

Calculation

pmTXCarPwr_079

pmTxCarrierPowerP5MD_30

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 39.5..40dBm

Calculation

pmTXCarPwr_080

pmTxCarrierPowerP5MD_31

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 40..40.5dBm

Calculation

pmTXCarPwr_081

pmTxCarrierPowerP5MD_32

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 40.5..41dBm

Calculation

pmTXCarPwr_082

pmTxCarrierPowerP5MD_33

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 41..41.5dBm

Calculation

pmTXCarPwr_083

pmTxCarrierPowerP5MD_34

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 41.5..42dBm

Calculation

pmTXCarPwr_084

pmTxCarrierPowerP5MD_35

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 42..42.5dBm

Calculation

pmTXCarPwr_085

pmTxCarrierPowerP5MD_36

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 42.5..43dBm

Calculation

pmTXCarPwr_086

pmTxCarrierPowerP5MD_37

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 43..43.5dBm

Calculation

pmTXCarPwr_087

pmTxCarrierPowerP5MD_38

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 43.5..44dBm

Calculation

pmTXCarPwr_088

pmTxCarrierPowerP5MD_39

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 44..44.5dBm

Calculation

pmTXCarPwr_089

pmTxCarrierPowerP5MD_40

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 44.5..45dBm

Calculation

pmTXCarPwr_090

pmTxCarrierPowerP5MD_41

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 45..45.5dBm

Calculation

pmTXCarPwr_091

pmTxCarrierPowerP5MD_42

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 45.5..46dBm

Calculation

pmTXCarPwr_092

pmTxCarrierPowerP5MD_43

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 46..46.5dBm

Calculation

pmTXCarPwr_093

pmTxCarrierPowerP5MD_44

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 46.5..47dBm

Calculation

pmTXCarPwr_094

pmTxCarrierPowerP5MD_45

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 47..47.5dBm

Calculation

pmTXCarPwr_095

pmTxCarrierPowerP5MD_46

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 47.5..48dBm

Calculation

pmTXCarPwr_096

pmTxCarrierPowerP5MD_47

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 48..48.5dBm

Calculation

pmTXCarPwr_097

pmTxCarrierPowerP5MD_48

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 48.5..49dBm

Calculation

pmTXCarPwr_098

pmTxCarrierPowerP5MD_49

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 49..49.5dBm

Calculation

pmTXCarPwr_099

pmTxCarrierPowerP5MD_50

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 49.5..50dBm

Calculation

pmTXCarPwr_100

Carrier Peg Counts

The following is a list of peg counts for the Carrier entity.

NodeB_nesw

NodeB NE Software Version

Data Source

NodeB

Source Field

nesw

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

CellCarrier,Carrier

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Carrier_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

Carrier_WMGeneral

pmAverageRssi_00

Number of samples with Received Signal Strength (RSSI) <-110 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_01

Number of samples with Received Signal Strength (RSSI) -110..-109.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_02

Number of samples with Received Signal Strength (RSSI) -109.5..-109 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_03

Number of samples with Received Signal Strength (RSSI) -109..-108.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_04

Number of samples with Received Signal Strength (RSSI) -108.5..-108 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_05

Number of samples with Received Signal Strength (RSSI) -108..-107.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_06

Number of samples with Received Signal Strength (RSSI) -107.5..-107 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_07

Number of samples with Received Signal Strength (RSSI) -107..-106.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_08

Number of samples with Received Signal Strength (RSSI) -106.5..-106 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_09

Number of samples with Received Signal Strength (RSSI) -106..-105.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_10

Number of samples with Received Signal Strength (RSSI) -105.5..-105 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_11

Number of samples with Received Signal Strength (RSSI) -105..-104.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_12

Number of samples with Received Signal Strength (RSSI) -104.5..-104 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_13

Number of samples with Received Signal Strength (RSSI) -104..-103.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_14

Number of samples with Received Signal Strength (RSSI) -103.5..-103 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_15

Number of samples with Received Signal Strength (RSSI) -103..-102.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_16

Number of samples with Received Signal Strength (RSSI) -102.5..-102 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_17

Number of samples with Received Signal Strength (RSSI) -102..-101.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_18

Number of samples with Received Signal Strength (RSSI) -101.5..-101 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_19

Number of samples with Received Signal Strength (RSSI) -101..-100.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_20

Number of samples with Received Signal Strength (RSSI) -100.5..-100 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_21

Number of samples with Received Signal Strength (RSSI) -100..-99.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_22

Number of samples with Received Signal Strength (RSSI) -99.5..-99 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_23

Number of samples with Received Signal Strength (RSSI) -99..-98.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_24

Number of samples with Received Signal Strength (RSSI) -98.5..-98 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_25

Number of samples with Received Signal Strength (RSSI) -98..-97.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_26

Number of samples with Received Signal Strength (RSSI) -97.5..-97 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_27

Number of samples with Received Signal Strength (RSSI) -97..-96.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_28

Number of samples with Received Signal Strength (RSSI) -96.5..-96 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_29

Number of samples with Received Signal Strength (RSSI) -96..-95.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_30

Number of samples with Received Signal Strength (RSSI) -95.5..-95 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_31

Number of samples with Received Signal Strength (RSSI) -95..-94.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_32

Number of samples with Received Signal Strength (RSSI) -94.5..-94 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_33

Number of samples with Received Signal Strength (RSSI) -94..-93.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_34

Number of samples with Received Signal Strength (RSSI) -93.5..-93 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_35

Number of samples with Received Signal Strength (RSSI) -93..-92.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_36

Number of samples with Received Signal Strength (RSSI) -92.5..-92 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_37

Number of samples with Received Signal Strength (RSSI) -92..-91.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_38

Number of samples with Received Signal Strength (RSSI) -91.5..-91 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_39

Number of samples with Received Signal Strength (RSSI) -91..-90.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_40

Number of samples with Received Signal Strength (RSSI) -90.5..-90 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_41

Number of samples with Received Signal Strength (RSSI) -90..-89.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_42

Number of samples with Received Signal Strength (RSSI) -89.5..-89 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_43

Number of samples with Received Signal Strength (RSSI) -89..-88.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_44

Number of samples with Received Signal Strength (RSSI) -88.5..-88 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_45

Number of samples with Received Signal Strength (RSSI) -88..-87.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_46

Number of samples with Received Signal Strength (RSSI) -87.5..-87 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_47

Number of samples with Received Signal Strength (RSSI) -87..-86.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_48

Number of samples with Received Signal Strength (RSSI) -86.5..-86 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_49

Number of samples with Received Signal Strength (RSSI) -86..-85.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_50

Number of samples with Received Signal Strength (RSSI) -85.5..-85 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_51

Number of samples with Received Signal Strength (RSSI) -85..-84.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_52

Number of samples with Received Signal Strength (RSSI) -84.5..-84 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_53

Number of samples with Received Signal Strength (RSSI) -84..-83.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_54

Number of samples with Received Signal Strength (RSSI) -83.5..-83 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_55

Number of samples with Received Signal Strength (RSSI) -83..-82.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_56

Number of samples with Received Signal Strength (RSSI) -82.5..-82 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_57

Number of samples with Received Signal Strength (RSSI) -82..-81.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_58

Number of samples with Received Signal Strength (RSSI) -81.5..-81 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_59

Number of samples with Received Signal Strength (RSSI) -81..-80.5 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_60

Number of samples with Received Signal Strength (RSSI) -80.5..-80 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssi_61

Number of samples with Received Signal Strength (RSSI) >= -80 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmAverageRssi

Source Section

CellCarrier,Carrier

pmAverageRssiP5MD_61

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -80.0..-75.0dBm

Data Source

NodeB

Source Field

pmAverageRssi

Source Section

Carrier

pmAverageRssiP5MD_62

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -75.0..-70.0dBm

Data Source

NodeB

Source Field

pmAverageRssi

Source Section

Carrier

pmAverageRssiP5MD_63

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range -70.0..-65.0dBm

Data Source

NodeB

Source Field

pmAverageRssi

Source Section

Carrier

pmAverageRssiP5MD_64

The average Received Signal Strength Indication (RSSI). Measured on TR device(s) every 100 ms, and the average value is calculated at the same rate. Number of samples in range \geq -65.0dBm

Data Source

NodeB

Source Field

pmAverageRssi

Source Section

Carrier

pmTransmittedCarrierPowerP6_00

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range < 0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_01

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 0..1 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_02

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 1..2 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_03

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 2..3 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_04

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 3..4 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_05

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 4..5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_06

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 5..6 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_07

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 6..7 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_08

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 7..8 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_09

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 8..9 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_10

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 9..10 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_11

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 10..11 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_12

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 11..12 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_13

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 12..13 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_14

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 13..14 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_15

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 14..15 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_16

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 15..16 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_17

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 16..17 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_18

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 17..18 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_19

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 18..19 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_20

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 19..20 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_21

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 20..21 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_22

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 21..22 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_23

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 22..23 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_24

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 23..24 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_25

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 24..25 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_26

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 25..26 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_27

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 26..27 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_28

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 27..28 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_29

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 28..29 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_30

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 29..30 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_31

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 30..31 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_32

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 31..32 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_33

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 32..33 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_34

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 33..34 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_35

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 34..35 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_36

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 35..36 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_37

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 36..37 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_38

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 37..38 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_39

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 38..39 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_40

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 39..40 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_41

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 40..41 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_42

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 41..42 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_43

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 42..43 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_44

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 43..44 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_45

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 44..45 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_46

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 45..46 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_47

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 46..47 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_48

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 47..48 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_49

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 48..49 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_50

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 49..50 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTransmittedCarrierPowerP6_51

The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range >50 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTXCarPwr_000

(Retired in Utran P6)(Retired in Utran P6)Transmitted Carrier Power - less than 0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_001

(Retired in Utran P6)Transmitted Carrier Power - 0.0 - 0.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_002

(Retired in Utran P6)Transmitted Carrier Power - 0.5 - 1.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_003

(Retired in Utran P6)Transmitted Carrier Power - 1.0 - 1.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_004

(Retired in Utran P6)Transmitted Carrier Power - 1.5 - 2.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_005

(Retired in Utran P6)Transmitted Carrier Power - 2.0 - 2.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_006

(Retired in Utran P6) Transmitted Carrier Power - 2.5 - 3.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_007

(Retired in Utran P6) Transmitted Carrier Power - 3.0 - 3.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_008

(Retired in Utran P6) Transmitted Carrier Power - 3.5 - 4.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_009

(Retired in Utran P6) Transmitted Carrier Power - 4.0 - 4.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_010

(Retired in Utran P6)Transmitted Carrier Power - 4.5 - 5.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_011

(Retired in Utran P6)Transmitted Carrier Power - 5.0 - 5.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_012

(Retired in Utran P6)Transmitted Carrier Power - 5.5 - 6.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_013

(Retired in Utran P6)Transmitted Carrier Power - 6.0 - 6.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_014

(Retired in Utran P6)Transmitted Carrier Power - 6.5 - 7.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_015

(Retired in Utran P6)Transmitted Carrier Power - 7.0 - 7.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_016

(Retired in Utran P6)Transmitted Carrier Power - 7.5 - 8.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_017

(Retired in Utran P6)Transmitted Carrier Power - 8.0 - 8.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_018

(Retired in Utran P6)Transmitted Carrier Power - 8.5 - 9.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_019

(Retired in Utran P6)Transmitted Carrier Power - 9.0 - 9.5 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_020

(Retired in Utran P6)Transmitted Carrier Power - 9.5 - 10.0 dBm (pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_021

(Retired in Utran P6)Transmitted Carrier Power - 10.0 - 10.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_022

(Retired in Utran P6) Transmitted Carrier Power - 10.5 - 11.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_023

(Retired in Utran P6) Transmitted Carrier Power - 11.0 - 11.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_024

(Retired in Utran P6) Transmitted Carrier Power - 11.5 - 12.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_025

(Retired in Utran P6) Transmitted Carrier Power - 12.0 - 12.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_026

(Retired in Utran P6) Transmitted Carrier Power - 12.5 - 13.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_027

(Retired in Utran P6) Transmitted Carrier Power - 13.0 - 13.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_028

(Retired in Utran P6) Transmitted Carrier Power - 13.5 - 14.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_029

(Retired in Utran P6) Transmitted Carrier Power - 14.0 - 14.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_030

(Retired in Utran P6) Transmitted Carrier Power - 14.5 - 15.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_031

(Retired in Utran P6) Transmitted Carrier Power - 15.0 - 15.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_032

(Retired in Utran P6) Transmitted Carrier Power - 15.5 - 16.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_033

(Retired in Utran P6) Transmitted Carrier Power - 16.0 - 16.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_034

(Retired in Utran P6) Transmitted Carrier Power - 16.5 - 17.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_035

(Retired in Utran P6) Transmitted Carrier Power - 17.0 - 17.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_036

(Retired in Utran P6) Transmitted Carrier Power - 17.5 - 18.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_037

(Retired in Utran P6) Transmitted Carrier Power - 18.0 - 18.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_038

(Retired in Utran P6) Transmitted Carrier Power - 18.5 - 19.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_039

(Retired in Utran P6) Transmitted Carrier Power - 19.0 - 19.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_040

(Retired in Utran P6) Transmitted Carrier Power - 19.5 - 20.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_041

(Retired in Utran P6) Transmitted Carrier Power - 20.0 - 20.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_042

(Retired in Utran P6) Transmitted Carrier Power - 20.5 - 21.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_043

(Retired in Utran P6) Transmitted Carrier Power - 21.0 - 21.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_044

(Retired in Utran P6) Transmitted Carrier Power - 21.5 - 22.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_045

(Retired in Utran P6) Transmitted Carrier Power - 22.0 - 22.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_046

(Retired in Utran P6)Transmitted Carrier Power - 22.5 - 23.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_047

(Retired in Utran P6)Transmitted Carrier Power - 23.0 - 23.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_048

(Retired in Utran P6)Transmitted Carrier Power - 23.5 - 24.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_049

(Retired in Utran P6) Transmitted Carrier Power - 24.0 - 24.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_050

(Retired in Utran P6) Transmitted Carrier Power - 24.5 - 25.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_051

(Retired in Utran P6) Transmitted Carrier Power - 25.0 - 25.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_052

(Retired in Utran P6) Transmitted Carrier Power - 25.5 - 26.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_053

(Retired in Utran P6) Transmitted Carrier Power - 26.0 - 26.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_054

(Retired in Utran P6) Transmitted Carrier Power - 26.5 - 27.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_055

(Retired in Utran P6) Transmitted Carrier Power - 27.0 - 27.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_056

(Retired in Utran P6) Transmitted Carrier Power - 27.5 - 28.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_057

(Retired in Utran P6) Transmitted Carrier Power - 28.0 - 28.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_058

(Retired in Utran P6) Transmitted Carrier Power - 28.5 - 29.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_059

(Retired in Utran P6) Transmitted Carrier Power - 29.0 - 29.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_060

(Retired in Utran P6) Transmitted Carrier Power - 29.5 - 30.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_061

(Retired in Utran P6) Transmitted Carrier Power - 30.0 - 30.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_062

(Retired in Utran P6) Transmitted Carrier Power - 30.5 - 31.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_063

(Retired in Utran P6) Transmitted Carrier Power - 31.0 - 31.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_064

(Retired in Utran P6) Transmitted Carrier Power - 31.5 - 32.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_065

(Retired in Utran P6) Transmitted Carrier Power - 32.0 - 32.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_066

(Retired in Utran P6) Transmitted Carrier Power - 32.5 - 33.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_067

(Retired in Utran P6) Transmitted Carrier Power - 33.0 - 33.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_068

(Retired in Utran P6) Transmitted Carrier Power - 33.5 - 34.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_069

(Retired in Utran P6) Transmitted Carrier Power - 34.0 - 34.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_070

(Retired in Utran P6) Transmitted Carrier Power - 34.5 - 35.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_071

(Retired in Utran P6) Transmitted Carrier Power - 35.0 - 35.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_072

(Retired in Utran P6) Transmitted Carrier Power - 35.5 - 36.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_073

(Retired in Utran P6) Transmitted Carrier Power - 36.0 - 36.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_074

(Retired in Utran P6) Transmitted Carrier Power - 36.5 - 37.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_075

(Retired in Utran P6) Transmitted Carrier Power - 37.0 - 37.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_076

(Retired in Utran P6) Transmitted Carrier Power - 37.5 - 38.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_077

(Retired in Utran P6) Transmitted Carrier Power - 38.0 - 38.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_078

(Retired in Utran P6) Transmitted Carrier Power - 38.5 - 39.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_079

(Retired in Utran P6) Transmitted Carrier Power - 39.0 - 39.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_080

(Retired in Utran P6) Transmitted Carrier Power - 39.5 - 40.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_081

(Retired in Utran P6) Transmitted Carrier Power - 40.0 - 40.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_082

(Retired in Utran P6) Transmitted Carrier Power - 40.5 - 41.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_083

(Retired in Utran P6) Transmitted Carrier Power - 41.0 - 41.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_084

(Retired in Utran P6) Transmitted Carrier Power - 41.5 - 42.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_085

(Retired in Utran P6) Transmitted Carrier Power - 42.0 - 42.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_086

(Retired in Utran P6) Transmitted Carrier Power - 42.5 - 43.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_087

(Retired in Utran P6) Transmitted Carrier Power - 43.0 - 43.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_088

(Retired in Utran P6) Transmitted Carrier Power - 43.5 - 44.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_089

(Retired in Utran P6) Transmitted Carrier Power - 44.0 - 44.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_090

(Retired in Utran P6) Transmitted Carrier Power - 44.5 - 45.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_091

(Retired in Utran P6) Transmitted Carrier Power - 45.0 - 45.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_092

(Retired in Utran P6) Transmitted Carrier Power - 45.5 - 46.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_093

(Retired in Utran P6) Transmitted Carrier Power - 46.0 - 46.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_094

(Retired in Utran P6) Transmitted Carrier Power - 46.5 - 47.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_095

(Retired in Utran P6) Transmitted Carrier Power - 47.0 - 47.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_096

(Retired in Utran P6) Transmitted Carrier Power - 47.5 - 48.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_097

(Retired in Utran P6) Transmitted Carrier Power - 48.0 - 48.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_098

(Retired in Utran P6) Transmitted Carrier Power - 48.5 - 49.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_099

(Retired in Utran P6) Transmitted Carrier Power - 49.0 - 49.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_100

(Retired in Utran P6)Transmitted Carrier Power - 49.5 - 50.0 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_101

(Retired in Utran P6)Transmitted Carrier Power - 50.0 - 50.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTXCarPwr_102

(Retired in Utran P6)Transmitted Carrier Power - equal or greater than 50.5 dBm
(pmTransmittedCarrierPower)

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedCarrierPower

Source Section

CellCarrier,Carrier

pmTxCarrierPowerP5MD_00

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range < 25dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTxCarrierPowerP5MD_01

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range 25..25.5dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

pmTxCarrierPowerP5MD_51

(Retired in Utran P6)The transmitted carrier power. Measured on the TR device(s) every 100 ms. Number of samples in range >= 50dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPower

Source Section

Carrier

CcDevice Primitive Calculations

The following is a list of primitive calculations for the CcDevice entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

CcDevice Peg Counts

The following is a list of peg counts for the CcDevice entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

CcDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

CcDevice_RNC_WMGeneral

pmSamplesMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSamplesMeasuredCcSpLoad

Source Section

CcDevice

pmSumMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSumMeasuredCcSpLoad

Source Section

CcDevice

CcDevice_NodeB Primitive Calculations

The following is a list of primitive calculations for the CcDevice_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

CcDevice_NodeB Peg Counts

The following is a list of peg counts for the CcDevice_NodeB entity.

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

CcDevice_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

CcDevice_NodeB_WMGeneral

pmSamplesMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSamplesMeasuredCcSpLoad

Source Section

CcDevice

pmSumMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSumMeasuredCcSpLoad

Source Section

CcDevice

RNC_RELEASE

Release

Data Source

NodeB_RXI

Source Section

CcDevice_NodeB

CcDevice_RNC Primitive Calculations

The following is a list of primitive calculations for the CcDevice_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

CcDevice_RNC Peg Counts

The following is a list of peg counts for the CcDevice_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

CcDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

CcDevice_RNC_WMGeneral

pmSamplesMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSamplesMeasuredCcSpLoad

Source Section

CcDevice

pmSumMeasuredCcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSumMeasuredCcSpLoad

Source Section

CcDevice

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

CcDevice_RNC

CnOperator Primitive Calculations

The following is a list of primitive calculations for the CnOperator entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

ContinuityCheckService Primitive Calculations

The following is a list of primitive calculations for the ContinuityCheckService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ContinuityCheckService Peg Counts

The following is a list of peg counts for the ContinuityCheckService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ContinuityCheckService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

ContinuityCheckService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

ContinuityCheckService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

ContinuityCheckService_Gen

CsdDigitalService Primitive Calculations

The following is a list of primitive calculations for the CsdDigitalService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_GSM_FTM_connection_reservation_success

GSM FTM connection reservation success rate Healthy value range for FTM connection reservation success rate: 99 - 100%

Calculation

$$\text{pmFtmSuccGsm} / \text{vsum}(\text{pmFtmSuccGsm} , \text{pmFtmFailGsm}) * 100.0$$

p_GSM_UDI_connection_reservation_success

GSM UDI connection reservation success rate Healthy value range for UDI connection reservation success rate: 99 - 100%

Calculation

$$(\text{pmUdiSuccGsm} / \text{vsum}(\text{pmUdiSuccGsm} , \text{pmUdiFailGsm})) * 100.0$$

p_Originating_GSM_modem_connection_success

Originating GSM modem connection success rate Healthy value range for originating modem connection success rate: 95 - 100%

Calculation

$$(\text{pmModemOSuccGsm} / (\text{vsum} (\text{pmModemOSuccGsm} , \text{pmModemOFailGsm}))) * 100.0$$

p_Originating_WCDMA_modem_connection_success

Originating WCDMA modem connection success rate Healthy value range for originating modem connection success rate: 95 - 100%

Calculation

$$(\text{pmModemOSucc} / (\text{vsum}(\text{pmModemOSucc} , \text{pmModemOFail}))) * 100.0$$

p_Seizures_Sucess_Rate

Percentage of Seizures which are successful

Calculation

$$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$$

p_Terminating_GSM_modem_connection_success

Terminating GSM modem connection success rate Healthy value range for terminating modem connection success rate: 95 - 100%

Calculation

$$\text{pmModemTSuccGsm} / \text{vsum} (\text{pmModemTSuccGsm} , \text{pmModemTFailGsm}) * 100.0$$

p_Terminating_WCDMA_modem_connection_success

Terminating WCDMA modem connection success rate Healthy value range for terminating modem connection success rate: 95 - 100%

Calculation

$$\text{pmModemTermSuccess} / \text{vsum}(\text{pmModemTermSuccess} , \text{pmModemTermFail}) * 100.0$$

p_WCDMA_FTM_connection_reservation_success

WCDMA FTM connection reservation success rate Healthy value range for WCDMA FTM connection reservation success rate: 99 - 100%

Calculation

$$(\text{pmFtmSucc} / (\text{vsum}(\text{pmFtmSucc} , \text{pmFtmFail}))) * 100.0$$

p_WCDMA_UDI_connection_reservation_success

WCDMA UDI connection reservation success rate Healthy value range for WCDMA UDI connection reservation success rate: 99 - 100%

Calculation

$$(\text{pmUdiSucc} / (\text{vsum}(\text{pmUdiSucc} , \text{pmUdiFail}))) * 100.0$$

CsdDigitalService Peg Counts

The following is a list of peg counts for the CsdDigitalService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

CsdDigitalService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

CsdDigitalService

pmFtmFail

The total number of unsuccessful, non-transparent FTM WCDMA connections.

Data Source

RNC_RXI

Source Field

pmFtmFail

Source Section

CsdDigitalService

pmFtmFailGsm

The total number of unsuccessful, non-transparent Frame Tunnel Mode (FTM) GSM connections.

Data Source

RNC_RXI

Source Field

pmFtmFailGsm

Source Section

CsdDigitalService

pmFtmSucc

The total number of successful non-transparent FTM WCDMA connections.

Data Source

RNC_RXI

Source Field

pmFtmSucc

Source Section

CsdDigitalService

pmFtmSuccGsm

The total number of successful, non-transparent FTM GSM connections.

Data Source

RNC_RXI

Source Field

pmFtmSuccGsm

Source Section

CsdDigitalService

pmModemOFail

The total number of unsuccessful originating MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmModemOFail

Source Section

CsdDigitalService

pmModemOFailGsm

The total number of unsuccessful originating MANT GSM connections.

Data Source

RNC_RXI

Source Field

pmModemOFailGsm

Source Section

CsdDigitalService

pmModemOSucc

The total number of successful originating MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmModemOSucc

Source Section

CsdDigitalService

pmModemOSuccGsm

The total number of successful originating, MANT GSM connections.

Data Source

RNC_RXI

Source Field

pmModemOSuccGsm

Source Section

CsdDigitalService

pmModemTFail

The total number of unsuccessful terminating MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmModemTFail

Source Section

CsdDigitalService

pmModemTFailGsm

The total number of unsuccessful terminating MANT GSM connections.

Data Source

RNC_RXI

Source Field

pmModemTFailGsm

Source Section

CsdDigitalService

pmModemTSuccGsm

The total number of successful terminating, MANT GSM connections.

Data Source

RNC_RXI

Source Field

pmModemTSuccGsm

Source Section

CsdDigitalService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

CsdDigitalService

pmNumFtm

The current number of non-transparent FTM WCDMA connections.

Data Source

RNC_RXI

Source Field

pmNumFtm

Source Section

CsdDigitalService

pmNumFtmGsm

The current number of non-transparent FTM GSM connections.

Data Source

RNC_RXI

Source Field

pmNumFtmGsm

Source Section

CsdDigitalService

pmNumModemO

The current number of originating MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmNumModemO

Source Section

CsdDigitalService

pmNumModemOGsm

The current number of originating MANT GSM connections

Data Source

RNC_RXI

Source Field

pmNumModemOGsm

Source Section

CsdDigitalService

pmNumModemT

The current number of terminating MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmNumModemT

Source Section

CsdDigitalService

pmNumModemTGsm

The current number of terminating MANT GSM connections.

Data Source

RNC_RXI

Source Field

pmNumModemTGsm

Source Section

CsdDigitalService

pmNumUdi

The current number of asynchronous non-transparent UDI WCDMA connections.

Data Source

RNC_RXI

Source Field

pmNumUdi

Source Section

CsdDigitalService

pmNumUdiGsm

The current number of asynchronous non-transparent Unrestricted Digital Information (UDI) GSM connections.

Data Source

RNC_RXI

Source Field

pmNumUdiGsm

Source Section

CsdDigitalService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

CsdDigitalService

pmUdiFail

The total number of unsuccessful asynchronous non-transparent UDI WCDMA connections.

Data Source

RNC_RXI

Source Field

pmUdiFail

Source Section

CsdDigitalService

pmUdiFailGsm

The total number of unsuccessful asynchronous non-transparent UDI GSM connections.

Data Source

RNC_RXI

Source Field

pmUdiFailGsm

Source Section

CsdDigitalService

pmUdiSucc

The total number of successful asynchronous non-transparent UDI WCDMA connections.

Data Source

RNC_RXI

Source Field

pmUdiSucc

Source Section

CsdDigitalService

pmUdiSuccGsm

The total number of successful asynchronous non-transparent UDI GSM connections.

Data Source

RNC_RXI

Source Field

pmUdiSuccGsm

Source Section

CsdDigitalService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

CsdDigitalService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

CsdDigitalService_Gen

CsdGsmFhService Primitive Calculations

The following is a list of primitive calculations for the CsdGsmFhService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

CsdGsmFhService Peg Counts

The following is a list of peg counts for the CsdGsmFhService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

CsdGsmFhService_Gen

pmBusyDevices

The current number of busy devices in the Service

Data Source

RNC_RXI

Source Field

pmBusyDevices

Source Section

CsdGsmFhService

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

CsdGsmFhService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

CsdGsmFhService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

CsdGsmFhService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

CsdGsmFhService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

CsdGsmFhService_Gen

CsdModemService Primitive Calculations

The following is a list of primitive calculations for the CsdModemService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

GSM_modem_connections

The total number of GSM modem connections

Calculation

vsum(pmAsyncNonTransModemGsm , pmAsyncTransModemGsm , pmSyncTransModemGsm)

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

p_Device_Service_reservation_success

Device Service reservation success rate Healthy value:99 - 100%

Calculation

`(1 - (pmUnsuccSeizures / pmTotalSeizures)) * 100.0`

p_Seizures_Sucess_Rate

Percentage of Seizures which are sucessful

Calculation

`100.0 * vsum(pmTotalSeizures, -1 * pmUnsuccSeizures) / pmTotalSeizures`

CsdModemService Peg Counts

The following is a list of peg counts for the CsdModemService entity.

PERLENSEC

Period length in seconds

Data Source

`RNC_RXI`

Source Field

`PERLENSEC`

Source Section

`CsdModemService_Gen`

pmAsyncNonTranModWcdma

The total number of modem MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmAsyncNonTransModemWcdma

Source Section

CsdModemService

pmAsyncNonTransModemGsm

The total number of modem asynchronous non-transparent (MANT) GSM connections.

Data Source

RNC_RXI

Source Field

pmAsyncNonTransModemGsm

Source Section

CsdModemService

pmAsyncNonTransModemWcdma

The total number of modem MANT WCDMA connections.

Data Source

RNC_RXI

Source Field

pmAsyncNonTransModemWcdma

Source Section

CsdModemService

pmAsyncTransModemGsm

The total number of modem asynchronous transparent (MAT) GSM connections.

Data Source

RNC_RXI

Source Field

pmAsyncTransModemGsm

Source Section

CsdModemService

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

CsdModemService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

CsdModemService

pmSyncTransModemGsm

The total number of modem synchronous transparent (MST) GSM connections.

Data Source

RNC_RXI

Source Field

pmSyncTransModemGsm

Source Section

CsdModemService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

CsdModemService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

CsdModemService

pmV21

The total number of V.21 WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV21

Source Section

CsdModemService

pmV21Gsm

The total number of V.21 GSM connections.

Data Source

RNC_RXI

Source Field

pmV21Gsm

Source Section

CsdModemService

pmV22

The total number of V.22 WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV22

Source Section

CsdModemService

pmV22bis

The total number of V.22bis WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV22bis

Source Section

CsdModemService

pmV22bisGsm

The total number of V.22bis GSM connections.

Data Source

RNC_RXI

Source Field

pmV22bisGsm

Source Section

CsdModemService

pmV22Gsm

The total number of V.22 GSM connections.

Data Source

RNC_RXI

Source Field

pmV22Gsm

Source Section

CsdModemService

pmV32

The total number of V.32 WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV32

Source Section

CsdModemService

pmV32Gsm

The total number of V.32 GSM connections.

Data Source

RNC_RXI

Source Field

pmV32Gsm

Source Section

CsdModemService

pmV34

The total number of V.34 WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV34

Source Section

CsdModemService

pmV34Gsm

The total number of V.34 GSM connections.

Data Source

RNC_RXI

Source Field

pmV34Gsm

Source Section

CsdModemService

pmV90

The total number of V.90 WCDMA connections.

Data Source

RNC_RXI

Source Field

pmV90

Source Section

CsdModemService

pmV90Gsm

The total number of V.90 GSM connections.

Data Source

RNC_RXI

Source Field

pmV90Gsm

Source Section

CsdModemService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

CsdModemService_Gen

DcDevice Primitive Calculations

The following is a list of primitive calculations for the DcDevice entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

DcDevice Peg Counts

The following is a list of peg counts for the DcDevice entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

DcDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

DcDevice_RNC_WMGeneral

pmSamplesMeasuredDcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the DC SP"

Data Source

RNC

Source Field

pmSamplesMeasuredDcSpLoad

Source Section

DcDevice

pmSumMeasuredDcSpLoad

Sum of all sample values recorded for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSumMeasuredDcSpLoad

Source Section

DcDevice

DcDevice_NodeB Primitive Calculations

The following is a list of primitive calculations for the DcDevice_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DcDevice_NodeB Peg Counts

The following is a list of peg counts for the DcDevice_NodeB entity.

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

DcDevice_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

DcDevice_NodeB_WMGeneral

RNC_RELEASE

Release

Data Source

NodeB_RXI

Source Section

DcDevice_NodeB

DcDevice_RNC Primitive Calculations

The following is a list of primitive calculations for the DcDevice_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DcDevice_RNC Peg Counts

The following is a list of peg counts for the DcDevice_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

DcDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

DcDevice_RNC_WMGeneral

pmSamplesMeasuredDcSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the DC SP"

Data Source

RNC

Source Field

pmSamplesMeasuredDcSpLoad

Source Section

DcDevice

pmSumMeasuredDcSpLoad

Sum of all sample values recorded for "Level of the averaged measured load on the CC SP"

Data Source

RNC

Source Field

pmSumMeasuredDcSpLoad

Source Section

DcDevice

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

DcDevice_RNC

DownlinkBaseBandPool Primitive Calculations

The following is a list of primitive calculations for the DownlinkBaseBandPool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

k_CE_DL_CONG

Number of setup failures due to TXB pool congestion

Calculation

```
vsum (pmNoOfRlAdditionFailuresSf8,pmNoOfRlAdditionFailuresSf16,pmNoOfRlAdditionFailuresSf32,pmNoOfRlAdditionFailuresSf128)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT ()
```

NUMHOURS

of hours in Summation Data

Calculation

DownlinkBaseBandPool Peg Counts

The following is a list of peg counts for the DownlinkBaseBandPool entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

DownlinkBaseBandPool

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

DownlinkBaseBandPool_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

DownlinkBaseBandPool_WMGeneral

pmApomcOfMdlr

Average percentage of maximum capacity for Mixed DL Link Rate on the DL baseband pool.

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfMdlr

Source Section

DownlinkBaseBandPool

pmApomcOfMdsr

Average percentage of maximum capacity for Mixed DL Service Rate on the DL baseband pool.

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfMdsr

Source Section

DownlinkBaseBandPool

pmApomcOfSpreadersUsed

Average percentage of maximum capacity for number of Spreaders used in the DL baseband pool.

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfSpreadersUsed

Source Section

DownlinkBaseBandPool

pmDIActPeakCapUsage

The actual DL peak capacity use in the Downlink baseband pool during the GP.

Data Source

NodeB

pmNoOfRadioLinksSf128_00

Number of RadioLinks in use (SF128) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_01

Number of RadioLinks in use (SF128) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_02

Number of RadioLinks in use (SF128) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_03

Number of RadioLinks in use (SF128) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_04

Number of RadioLinks in use (SF128) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_05

Number of RadioLinks in use (SF128) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_06

Number of RadioLinks in use (SF128) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_07

Number of RadioLinks in use (SF128) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_08

Number of RadioLinks in use (SF128) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_09

Number of RadioLinks in use (SF128) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_10

Number of RadioLinks in use (SF128) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_11

Number of RadioLinks in use (SF128) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_12

Number of RadioLinks in use (SF128) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_13

Number of RadioLinks in use (SF128) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf128_14

Number of RadioLinks in use (SF128) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_00

Number of RadioLinks in use (SF16) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_01

Number of RadioLinks in use (SF16) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_02

Number of RadioLinks in use (SF16) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_03

Number of RadioLinks in use (SF16) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_04

Number of RadioLinks in use (SF16) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_05

Number of RadioLinks in use (SF16) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_06

Number of RadioLinks in use (SF16) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_07

Number of RadioLinks in use (SF16) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_08

Number of RadioLinks in use (SF16) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_09

Number of RadioLinks in use (SF16) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_10

Number of RadioLinks in use (SF16) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_11

Number of RadioLinks in use (SF16) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_12

Number of RadioLinks in use (SF16) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_13

Number of RadioLinks in use (SF16) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf16_14

Number of RadioLinks in use (SF16) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_00

Number of RadioLinks in use (SF256) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_01

Number of RadioLinks in use (SF256) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_02

Number of RadioLinks in use (SF256) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_03

Number of RadioLinks in use (SF256) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_04

Number of RadioLinks in use (SF256) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_05

Number of RadioLinks in use (SF256) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_06

Number of RadioLinks in use (SF256) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_07

Number of RadioLinks in use (SF256) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_08

Number of RadioLinks in use (SF256) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_09

Number of RadioLinks in use (SF256) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_10

Number of RadioLinks in use (SF256) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_11

Number of RadioLinks in use (SF256) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_12

Number of RadioLinks in use (SF256) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_13

Number of RadioLinks in use (SF256) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf256_14

Number of RadioLinks in use (SF256) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_00

Number of RadioLinks in use (SF32) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_01

Number of RadioLinks in use (SF32) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_02

Number of RadioLinks in use (SF32) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_03

Number of RadioLinks in use (SF32) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_04

Number of RadioLinks in use (SF32) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_05

Number of RadioLinks in use (SF32) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_06

Number of RadioLinks in use (SF32) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_07

Number of RadioLinks in use (SF32) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_08

Number of RadioLinks in use (SF32) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_09

Number of RadioLinks in use (SF32) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_10

Number of RadioLinks in use (SF32) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_11

Number of RadioLinks in use (SF32) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_12

Number of RadioLinks in use (SF32) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_13

Number of RadioLinks in use (SF32) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf32_14

Number of RadioLinks in use (SF32) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_00

Number of RadioLinks in use (SF4) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_01

Number of RadioLinks in use (SF4) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_02

Number of RadioLinks in use (SF4) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_03

Number of RadioLinks in use (SF4) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_04

Number of RadioLinks in use (SF4) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_05

Number of RadioLinks in use (SF4) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_06

Number of RadioLinks in use (SF4) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_07

Number of RadioLinks in use (SF4) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_08

Number of RadioLinks in use (SF4) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_09

Number of RadioLinks in use (SF4) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_10

Number of RadioLinks in use (SF4) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_11

Number of RadioLinks in use (SF4) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_12

Number of RadioLinks in use (SF4) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_13

Number of RadioLinks in use (SF4) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf4_14

Number of RadioLinks in use (SF4) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_00

Number of RadioLinks in use (SF64) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_01

Number of RadioLinks in use (SF64) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_02

Number of RadioLinks in use (SF64) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_03

Number of RadioLinks in use (SF64) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_04

Number of RadioLinks in use (SF64) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_05

Number of RadioLinks in use (SF64) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_06

Number of RadioLinks in use (SF64) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_07

Number of RadioLinks in use (SF64) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_08

Number of RadioLinks in use (SF64) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_09

Number of RadioLinks in use (SF64) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_10

Number of RadioLinks in use (SF64) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_11

Number of RadioLinks in use (SF64) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_12

Number of RadioLinks in use (SF64) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_13

Number of RadioLinks in use (SF64) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf64_14

Number of RadioLinks in use (SF64) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_00

Number of RadioLinks in use (SF8) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_01

Number of RadioLinks in use (SF8) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_02

Number of RadioLinks in use (SF8) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_03

Number of RadioLinks in use (SF8) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_04

Number of RadioLinks in use (SF8) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_05

Number of RadioLinks in use (SF8) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_06

Number of RadioLinks in use (SF8) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_07

Number of RadioLinks in use (SF8) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_08

Number of RadioLinks in use (SF8) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_09

Number of RadioLinks in use (SF8) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_10

Number of RadioLinks in use (SF8) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_11

Number of RadioLinks in use (SF8) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_12

Number of RadioLinks in use (SF8) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_13

Number of RadioLinks in use (SF8) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRadioLinksSf8_14

Number of RadioLinks in use (SF8) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf128

The number of RL addition fail due to TXB congestion. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf128

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf16

The number of RL addition fail due to TXB congestion. Spreading Factor 16

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf16

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf256

The number of RL addition fail due to TXB congestion. Spreading Factor 256

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf256

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf32

The number of RL addition fail due to TXB congestion. Spreading Factor 32

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf32

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf4

The number of RL addition fail due to TXB congestion. Spreading Factor 4

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf4

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf64

The number of RL addition fail due to TXB congestion. Spreading Factor 64

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf64

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf8

The number of RL addition fail due to TXB congestion. Spreading Factor 8

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIAdditionFailuresSf8

Source Section

DownlinkBaseBandPool

pmNoOfRIAdditionFailuresSf4

The number of RL Addition failures for the DL baseband pool caused by TXB congestion, stored in the applicable counter depending on the SF.

Data Source

NodeB

pmSetupAttemptsSf128

The number of setup attempts on the DL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf128

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf16

The number of setup attempts on the DL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf16

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf256

The number of setup attempts on the DL base band pool. Spreading Factor 256

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf256

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf32

The number of setup attempts on the DL base band pool. Spreading Factor 32

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf32

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf4

The number of setup attempts on the DL base band pool. Spreading Factor 4

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf4

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf64

The number of setup attempts on the DL base band pool. Spreading Factor 64

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf64

Source Section

DownlinkBaseBandPool

pmSetupAttemptsSf8

The number of setup attempts on the DL base band pool. Spreading Factor 8

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf8

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf128

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf128

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf16

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 16

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf16

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf256

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 256

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf256

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf32

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 32

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf32

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf4

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 4

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf4

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf64

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 64

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf64

Source Section

DownlinkBaseBandPool

pmSetupFailuresSf8

The number of setup fail due to TXB cong on DL base band pool. Spreading Factor 8

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf8

Source Section

DownlinkBaseBandPool

DtmfRcvrService Primitive Calculations

The following is a list of primitive calculations for the DtmfRcvrService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

DtmfRcvrService Peg Counts

The following is a list of peg counts for the DtmfRcvrService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

DtmfRcvrService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

DtmfReceiverService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

DtmfReceiverService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

DtmfReceiverService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

DtmfReceiverService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

DtmfReceiverService_Gen

DtmfSenderService Primitive Calculations

The following is a list of primitive calculations for the DtmfSenderService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

DtmfSenderService Peg Counts

The following is a list of peg counts for the DtmfSenderService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

DtmfSenderService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

DtmfSenderService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

DtmfSenderService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

DtmfSenderService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

DtmfSenderService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

DtmfSenderService_Gen

E1PhysPathTerm_NodeB Primitive Calculations

The following is a list of primitive calculations for the E1PhysPathTerm_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errored_Ratio_NodeB

In standards (G.826) Errored Seconds Ratio

Calculation

pmEs / PERLENSSEC

Phy_Severely_Errored_Ratio_NodeB

In standards (G.826) Severly Errored Seconds Ratio

Calculation

pmSes / PERLENSEC

E1PhysPathTerm_NodeB Peg Counts

The following is a list of peg counts for the E1PhysPathTerm_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

E1PhysPathTerm_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

E1PhysPathTerm_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

E1PhysPathTerm_NodeB_WMGeneral

pmEs

Errored seconds (ES).

Data Source

NodeB_RNC_RXI

Source Field

pmEs

Source Section

E1PhysPathTerm_NodeB

pmSes

Severely errored seconds (SES).

Data Source

NodeB_RNC_RXI

Source Field

pmSes

Source Section

E1PhysPathTerm_NodeB

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected

Data Source

NodeB_RXI

Source Field

pmUas

Source Section

E1PhysPathTerm

E1PhysPathTerm_RNC Primitive Calculations

The following is a list of primitive calculations for the E1PhysPathTerm_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errored_Ratio_RNC

In standards (G.826) Errored Seconds Ratio

Calculation

pmEs / PERLENSSEC

Phy_Severely_Errored_Ratio_RNC

In standards (G.826) Severly Errored Seconds Ratio

Calculation

pmSes / PERLENSSEC

E1PhysPathTerm_RNC Peg Counts

The following is a list of peg counts for the E1PhysPathTerm_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

E1PhysPathTerm_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

E1PhysPathTerm_RNC_WMGeneral

pmEs

Errored seconds (ES).

Data Source

NodeB_RNC_RXI

Source Field

pmEs

Source Section

E1PhysPathTerm_RNC

pmSes

Severely errored seconds (SES).

Data Source

NodeB_RNC_RXI

Source Field

pmSes

Source Section

E1PhysPathTerm_RNC

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected

Data Source

RNC_RXI

Source Field

pmUas

Source Section

E1PhysPathTerm

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

E1PhysPathTerm_RNC

E1Ttp_NodeB Primitive Calculations

The following is a list of primitive calculations for the E1Ttp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errored_Ratio_NodeB

In standards (G.826) Errored Seconds Ratio

Calculation

pmEs / PERLENSSEC

Phy_Severely_Errored_Ratio_NodeB

In standards (G.826) Severly Errored Seconds Ratio

Calculation

pmSes / PERLENSSEC

E1Ttp_NodeB Peg Counts

The following is a list of peg counts for the E1Ttp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Section

E1Ttp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

E1Ttp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

E1Ttp_NodeB_WMGeneral

pmEs

Errored seconds (ES).

Data Source

NodeB_RXI

Source Field

pmEs

Source Section

E1Ttp

pmSes

Severely errored seconds (SES).

Data Source

NodeB_RXI

Source Field

pmSes

Source Section

E1Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected

Data Source

NodeB_RXI

Source Field

pmUas

Source Section

E1Ttp

E1Ttp_RNC Primitive Calculations

The following is a list of primitive calculations for the E1Ttp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errored_Ratio_RNC

In standards (G.826) Errored Seconds Ratio

Calculation

pmEs / PERLENSEC

Phy_Severely_Errored_Ratio_RNC

In standards (G.826) Severly Errored Seconds Ratio

Calculation

pmSes / PERLENSEC

E1Ttp_RNC Peg Counts

The following is a list of peg counts for the E1Ttp_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

E1Ttp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

E1Ttp_RNC_WMGeneral

pmEs

Errored seconds (ES).

Data Source

RNC_RXI

Source Field

pmEs

Source Section

E1Ttp

pmSes

Severely errored seconds (SES).

Data Source

RNC_RXI

Source Field

pmSes

Source Section

E1Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected

Data Source

RNC_RXI

Source Field

pmUas

Source Section

E1Ttp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

E1Ttp_RNC

ECRouteParameterSet Primitive Calculations

The following is a list of primitive calculations for the ECRouteParameterSet entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ECRouteParameterSet Peg Counts

The following is a list of peg counts for the ECRouteParameterSet entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ECRouteParameterSet_Gen

pmI10ValAslr

The total number of ASL-R measurements at -22 and -23 dbm0

Data Source

RNC_RXI

Source Field

pmI10ValAslr

Source Section

ECRouteParameterSet

pmI10ValAsls

The total number of ASL-S measurements at -22 and -23 dbm0

Data Source

RNC_RXI

Source Field

pmI10ValAsls

Source Section

ECRouteParameterSet

pmI10ValErl

The total number of ERL measurements at 18 and 19 db

Data Source

RNC_RXI

Source Field

pmI10ValErl

Source Section

ECRouteParameterSet

pmI10ValPd

The total number of PD measurements between 72 and 79 ms

Data Source

RNC_RXI

Source Field

pmI10ValPd

Source Section

ECRouteParameterSet

pmI11ValAslr

The total number of ASL-R measurements at -24 and -25 dbm0

Data Source

RNC_RXI

Source Field

pmI11ValAslr

Source Section

ECRouteParameterSet

pmI11ValAsls

The total number of ASL-S measurements at -24 and -25 dbm0

Data Source

RNC_RXI

Source Field

pmI11ValAsls

Source Section

ECRouteParameterSet

pmI11ValErl

The total number of ERL measurements at 20 and 21 db

Data Source

RNC_RXI

Source Field

pmI11ValErl

Source Section

ECRouteParameterSet

pmI11ValPd

The total number of PD measurements between 80 and 87 ms.

Data Source

RNC_RXI

Source Field

pmI11ValPd

Source Section

ECRouteParameterSet

pmI12ValAslr

The total number of ASL-R measurements at -26 and -27 dbm0.

Data Source

RNC_RXI

Source Field

pmI12ValAslr

Source Section

ECRouteParameterSet

pmI12ValAsls

The total number of ASL-S measurements at -26 and -27 dbm0.

Data Source

RNC_RXI

Source Field

pmI12ValAsls

Source Section

ECRouteParameterSet

pmI12ValErl

The total number of ERL measurements at 22 and 23 db.

Data Source

RNC_RXI

Source Field

pmI12ValErl

Source Section

ECRouteParameterSet

pmI12ValPd

The total number of PD measurements between 88 and 95 ms.

Data Source

RNC_RXI

Source Field

pmI12ValPd

Source Section

ECRouteParameterSet

pmI13ValAslr

The total number of ASL-R measurements at -28 and -29 dbm0.

Data Source

RNC_RXI

Source Field

pmI13ValAslr

Source Section

ECRouteParameterSet

pmI13ValAsls

The total number of ASL-S measurements at -28 and -29 dbm0.

Data Source

RNC_RXI

Source Field

pmI13ValAsls

Source Section

ECRouteParameterSet

pmI13ValErl

The total number of ERL measurements at 24 and 25 db.

Data Source

RNC_RXI

Source Field

pmI13ValErl

Source Section

ECRouteParameterSet

pmI13ValPd

The total number of PD measurements between 96 and 103 ms.

Data Source

RNC_RXI

Source Field

pmI13ValPd

Source Section

ECRouteParameterSet

pmI14ValAslr

The total number of ASL-R measurements at -30 and -31 dbm0.

Data Source

RNC_RXI

Source Field

pmI14ValAslr

Source Section

ECRouteParameterSet

pmI14ValAsls

The total number of ASL-S measurements at -30 and -31 dbm0.

Data Source

RNC_RXI

Source Field

pmI14ValAsls

Source Section

ECRouteParameterSet

pmI14ValErl

The total number of ERL measurements at 26 and 27 db.

Data Source

RNC_RXI

Source Field

pmI14ValErl

Source Section

ECRouteParameterSet

pmI14ValPd

The total number of PD measurements between 104 and 111 ms.

Data Source

RNC_RXI

Source Field

pmI14ValPd

Source Section

ECRouteParameterSet

pmI15ValAslr

The total number of ASL-R measurements at -32 and -33 dbm0.

Data Source

RNC_RXI

Source Field

pmI15ValAslr

Source Section

ECRouteParameterSet

pmI15ValAsls

The total number of ASL-S measurements at -32 and -33 dbm0.

Data Source

RNC_RXI

Source Field

pmI15ValAsls

Source Section

ECRouteParameterSet

pmI15ValErl

The total number of ERL measurements at 28 and 29 db.

Data Source

RNC_RXI

Source Field

pmI15ValErl

Source Section

ECRouteParameterSet

pmI15ValPd

The total number of PD measurements between 112 and 119 ms.

Data Source

RNC_RXI

Source Field

pmI15ValPd

Source Section

ECRouteParameterSet

pmI16ValAslr

The total number of ASL-R measurements at -34 and -35 dbm0.

Data Source

RNC_RXI

Source Field

pmI16ValAslr

Source Section

ECRouteParameterSet

pmI16ValAsls

The total number of ASL-S measurements at -34 and -35 dbm0.

Data Source

RNC_RXI

Source Field

pmI16ValAsls

Source Section

ECRouteParameterSet

pmI16ValErl

The total number of ERL measurements at 30 db.

Data Source

RNC_RXI

Source Field

pmI16ValErl

Source Section

ECRouteParameterSet

pmI16ValPd

The total number of PD measurements between 120 and 127 ms.

Data Source

RNC_RXI

Source Field

pmI16ValPd

Source Section

ECRouteParameterSet

pmI1ValAslr

The total number of Active Speech Level at Rout (ASL-R) measurements at -4 and -5 dbm0.

Data Source

RNC_RXI

Source Field

pmI1ValAslr

Source Section

ECRouteParameterSet

pmI1ValAsls

The total number of Active Speech Level at Sout (ASL-S) measurements at -4 and -5 dbm0.

Data Source

RNC_RXI

Source Field

pmI1ValAsls

Source Section

ECRouteParameterSet

pmI1ValErl

The total number of Echo Return Loss (ERL) measurements at 0 and 1 db.

Data Source

RNC_RXI

Source Field

pmI1ValErl

Source Section

ECRouteParameterSet

pmI1ValPd

The total number of Pure Delay (PD) measurements between 0 and 7 ms.

Data Source

RNC_RXI

Source Field

pmI1ValPd

Source Section

ECRouteParameterSet

pmI2ValAslr

The total number of ASL-R measurements at -6 and -7 dbm0.

Data Source

RNC_RXI

Source Field

pmI2ValAslr

Source Section

ECRouteParameterSet

pmI2ValAsls

The total number of ASL-S measurements at -6 and -7 dbm0.

Data Source

RNC_RXI

Source Field

pmI2ValAsls

Source Section

ECRouteParameterSet

pmI2ValErl

The total number of ERL measurements at 2 and 3 db.

Data Source

RNC_RXI

Source Field

pmI2ValErl

Source Section

ECRouteParameterSet

pmI2ValPd

The total number of PD measurements between 8 and 15 ms.

Data Source

RNC_RXI

Source Field

pmI2ValPd

Source Section

ECRouteParameterSet

pmI3ValAslr

The total number of ASL-R measurements at -8 and -9 dbm0.

Data Source

RNC_RXI

Source Field

pmI3ValAslr

Source Section

ECRouteParameterSet

pmI3ValAsls

The total number of ASL-S measurements at -8 and -9 dbm0.

Data Source

RNC_RXI

Source Field

pmI3ValAsls

Source Section

ECRouteParameterSet

pmI3ValErl

The total number of ERL measurements at 4 and 5 db.

Data Source

RNC_RXI

Source Field

pmI3ValErl

Source Section

ECRouteParameterSet

pmI3ValPd

The total number of PD measurements between 16 and 23 ms.

Data Source

RNC_RXI

Source Field

pmI3ValPd

Source Section

ECRouteParameterSet

pmI4ValAslr

The total number of ASL-R measurements at -10 and -11 dbm0.

Data Source

RNC_RXI

Source Field

pmI4ValAslr

Source Section

ECRouteParameterSet

pmI4ValAsls

The total number of ASL-S measurements at -10 and -11 dbm0.

Data Source

RNC_RXI

Source Field

pmI4ValAsls

Source Section

ECRouteParameterSet

pmI4ValErl

The total number of ERL measurements at 6 and 7 db.

Data Source

RNC_RXI

Source Field

pmI4ValErl

Source Section

ECRouteParameterSet

pmI4ValPd

The total number of PD measurements between 24 and 31 ms.

Data Source

RNC_RXI

Source Field

pmI4ValPd

Source Section

ECRouteParameterSet

pmI5ValAslr

The total number of ASL-R measurements at -12 and -13 dbm0.

Data Source

RNC_RXI

Source Field

pmI5ValAslr

Source Section

ECRouteParameterSet

pmI5ValAsls

The total number of ASL-S measurements at -12 and -13 dbm0.

Data Source

RNC_RXI

Source Field

pmI5ValAsls

Source Section

ECRouteParameterSet

pmI5ValErl

The total number of ERL measurements at 8 and 9 db.

Data Source

RNC_RXI

Source Field

pmI5ValErl

Source Section

ECRouteParameterSet

pmI5ValPd

The total number of PD measurements between 32 and 39 ms.

Data Source

RNC_RXI

Source Field

pmI5ValPd

Source Section

ECRouteParameterSet

pmI6ValAslr

The total number of ASL-R measurements at -14 and -15 dbm0.

Data Source

RNC_RXI

Source Field

pmI6ValAslr

Source Section

ECRouteParameterSet

pmI6ValAsls

The total number of ASL-S measurements at -14 and -15 dbm0.

Data Source

RNC_RXI

Source Field

pmI6ValAsls

Source Section

ECRouteParameterSet

pmI6ValErl

The total number of ERL measurements at 10 and 11 db.

Data Source

RNC_RXI

Source Field

pmI6ValErl

Source Section

ECRouteParameterSet

pmI6ValPd

The total number of PD measurements between 40 and 47 ms.

Data Source

RNC_RXI

Source Field

pmI6ValPd

Source Section

ECRouteParameterSet

pmI7ValAslr

The total number of ERL measurements at 12 and 13 db.

Data Source

RNC_RXI

Source Field

pmI7ValAslr

Source Section

ECRouteParameterSet

pmI7ValAsls

The total number of ERL measurements at 12 and 13 db.

Data Source

RNC_RXI

Source Field

pmI7ValAsls

Source Section

ECRouteParameterSet

pmI7ValErl

The total number of ERL measurements at 12 and 13 db.

Data Source

RNC_RXI

Source Field

pmI7ValErl

Source Section

ECRouteParameterSet

pmI7ValPd

The total number of PD measurements between 48 and 55 ms.

Data Source

RNC_RXI

Source Field

pmI7ValPd

Source Section

ECRouteParameterSet

pmI8ValAslr

The total number of ASL-R measurements at -18 and -19 dbm0.

Data Source

RNC_RXI

Source Field

pmI8ValAslr

Source Section

ECRouteParameterSet

pmI8ValAsls

The total number of ASL-S measurements at -18 and -19 dbm0.

Data Source

RNC_RXI

Source Field

pmI8ValAsls

Source Section

ECRouteParameterSet

pmI8ValErl

The total number of ERL measurements at 14 and 15 db.

Data Source

RNC_RXI

Source Field

pmI8ValErl

Source Section

ECRouteParameterSet

pmI8ValPd

The total number of PD measurements between 56 and 63 ms.

Data Source

RNC_RXI

Source Field

pmI8ValPd

Source Section

ECRouteParameterSet

pmI9ValAslr

The total number of ASL-R measurements at -20 and -21 dbm0.

Data Source

RNC_RXI

Source Field

pmI9ValAslr

Source Section

ECRouteParameterSet

pmI9ValAsls

The total number of ASL-S measurements at -20 and -21 dbm0.

Data Source

RNC_RXI

Source Field

pmI9ValAsls

Source Section

ECRouteParameterSet

pmI9ValErl

The total number of ERL measurements at 16 and 17 db.

Data Source

RNC_RXI

Source Field

pmI9ValErl

Source Section

ECRouteParameterSet

pmI9ValPd

The total number of PD measurements between 64 and 71 ms.

Data Source

RNC_RXI

Source Field

pmI9ValPd

Source Section

ECRouteParameterSet

pmNInvalid

The total number of invalid measurements.

Data Source

RNC_RXI

Source Field

pmNInvalid

Source Section

ECRouteParameterSet

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

ECRouteParameterSet_Gen

ECServiceRNC Primitive Calculations

The following is a list of primitive calculations for the ECServiceRNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

100.0 * vsum(pmTotalSeizures, -1 * pmUnsuccSeizures) / pmTotalSeizures

ECServiceRNC Peg Counts

The following is a list of peg counts for the ECServiceRNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ECServiceRNC_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

ECService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

ECService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

EcService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

EcService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

ECService_Gen

EDchResources Primitive Calculations

The following is a list of primitive calculations for the EDchResources entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

EDchResources Peg Counts

The following is a list of peg counts for the EDchResources entity.

PERLENSEC

Period length in seconds

Data Source

NodeB

Source Field

gp

Source Section

EDchResources

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB

Source Field

gp

Source Section

EDchResources

pmCommonChPowerEul_00

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 0 to 1 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_01

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 1 to 2 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_02

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 2 to 3 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_03

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 3 to 4 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_04

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 4 to 5 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_05

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 5 to 6 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_06

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 6 to 7 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_07

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 7 to 8 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_08

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 8 to 9 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_09

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 9 to 10 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_10

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 10 to 11 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_11

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 11 to 12 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_12

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 12 to 13 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_13

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 13 to 14 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_14

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 14 to 15 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_15

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 15 to 16 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_16

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 16 to 17 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_17

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 17 to 18 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_18

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 18 to 19 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_19

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 19 to 20 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_20

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 20 to 21 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_21

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 21 to 22 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_22

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 22 to 23 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_23

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 23 to 24 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_24

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 24 to 25 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_25

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 25 to 26 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_26

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 26 to 27 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_27

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 27 to 28 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_28

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 28 to 29 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_29

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 29 to 30 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_30

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 30 to 31 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_31

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 31 to 32 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_32

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 32 to 33 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_33

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 33 to 34 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_34

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 34 to 35 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_35

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 35 to 36 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_36

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 36 to 37 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_37

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 37 to 38 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_38

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 38 to 39 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_39

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range 39 to 40 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmCommonChPowerEul_40

This counter is used to observe the total DL power used for the E-AGCH, E-RGCH and E-HICH in the cell. Trigger: Sampled every 100 ms. Number of samples in range ≥ 40 dBm

Data Source

NodeB

Source Field

pmCommonChPowerEul

Source Section

EDchResources

pmNoActive10msFramesEul

PEG counter for the sum of used 10 ms frames (TTI) that receive E-DCH data in a cell during an ROP period for all E-DCH users.

Data Source

NodeB

Source Field

pmNoActive10msFramesEul

Source Section

EDchResources

pmNoAllowedEul

PEG Counter used to measure number of times that no E-DCH traffic is allowed owing to uplink interference.

Data Source

NodeB

Source Field

pmNoAllowedEul

Source Section

EDchResources

pmNoiseFloor_00

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range < -114dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_01

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -114..-113dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_02

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -113..-112dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_03

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -112..-111dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_04

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -111..-110dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_05

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -110..-109dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_06

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -109..-108dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_07

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -108..-107dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_08

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -107..-106dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_09

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -106..-105dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_10

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -105..-104dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_11

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -104..-103dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_12

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -103...-102dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_13

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -102...-101dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_14

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -101...-100dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_15

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -100..-99dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_16

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -99..-98dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_17

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -98..-97dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_18

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -97..-96dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_19

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -96..-95dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_20

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -95..-94dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_21

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -94..-93dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_22

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -93..-92dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_23

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -92..-91dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_24

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -91..-90dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_25

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -90..-89dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_26

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -89..-88dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_27

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -88..-87dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_28

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -87..-86dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_29

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -86..-85dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_30

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -85..-84dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_31

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -84..-83dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_32

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -83..-82dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_33

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -82...-81dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_34

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -81...-80dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_35

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -80...-79dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_36

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -79..-78dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_37

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -78..-77dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_38

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -77..-76dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_39

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -76..-75dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_40

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -75..-74dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_41

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -74..-73dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_42

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -73..-72dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_43

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -72..-71dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_44

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -71..-70dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_45

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -70..-69dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_46

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -69..-68dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_47

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -68..-67dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_48

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -67..-66dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_49

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -66..-65dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_50

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -65..-64dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_51

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -64..-63dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_52

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -63..-62dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_53

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -62..-61dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_54

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range -61..-60dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoiseFloor_55

This counter is used to show the used thermal noise level value in the Rise over Thermal (RoT) measurement. Number of samples in range ≥ -60 dBm

Data Source

NodeB

Source Field

pmNoiseFloor

Source Section

EDchResources

pmNoSchEdchEul_00

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 0..1

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_01

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 1..2

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_02

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 2..3

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_03

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 3..4

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_04

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 4..5

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_05

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 5..6

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_06

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 6..7

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_07

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 7..8

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_08

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 8..9

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_09

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 9..10

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_10

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 10..15

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_11

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 15..20

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_12

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 20..25

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_13

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 25..30

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_14

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 30..40

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_15

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 40..50

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_16

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 50..60

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_17

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 60..70

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_18

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 70..80

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_19

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range 80..90

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoSchEdchEul_20

This counter shows the total number of simultaneous scheduled E-DCH users having a rate >0 kbps. Number of users in range >= 90

Data Source

NodeB

Source Field

pmNoSchEdchEul

Source Section

EDchResources

pmNoUIUuLoadLimitEul

PEG Counter for the number of times a scheduling decision is taken to increase the Uu rate of an E-DCH user and there is a need to decrease the Uu rate for another E-DCH user owing to UL Uu load limitations.

Data Source

NodeB

Source Field

pmNoUIUuLoadLimitEul

Source Section

EDchResources

pmOwnUuLoad_00

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 0..0.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_01

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 0.2..0.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_02

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 0.4..0.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_03

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 0.6..0.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_04

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 0.8..1.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_05

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 1.0..1.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_06

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 1.2..1.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_07

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 1.4..1.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_08

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 1.6..1.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_09

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 1.8..2.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_10

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 2.0..2.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_11

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 2.2..2.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_12

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 2.4..2.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_13

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 2.6..2.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_14

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 2.8..3.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_15

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 3.0..3.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_16

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 3.2..3.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_17

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 3.4..3.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_18

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 3.6..3.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_19

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 3.8..4.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_20

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 4.0..4.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_21

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 4.2..4.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_22

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 4.4..4.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_23

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 4.6..4.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_24

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 4.8..5.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_25

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 5.0..5.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_26

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 5.2..5.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_27

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 5.4..5.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_28

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 5.6..5.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_29

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 5.8..6.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_30

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 6.0..6.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_31

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 6.2..6.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_32

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 6.4..6.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_33

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 6.6..6.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_34

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 6.8..7.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_35

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 7.0..7.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_36

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 7.2..7.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_37

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 7.4..7.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_38

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 7.6..7.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_39

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 7.8..8.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_40

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 8.0..8.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_41

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 8.2..8.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_42

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 8.4..8.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_43

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 8.6..8.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_44

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 8.8..9.0dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_45

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 9.0..9.2dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_46

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 9.2..9.4dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_47

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 9.4..9.6dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_48

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 9.6..9.8dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_49

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range 9.8..10dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmOwnUuLoad_50

Counter per cell for the power-controlled noise rise caused by the intra-cell interference that affects the Uu load. Number of samples in range ≥ 10 dB

Data Source

NodeB

Source Field

pmOwnUuLoad

Source Section

EDchResources

pmSumAackedBitsCellEul

PEG counter for the total amount of acked data received in kbits after HARQ process on MAC-e level for all users in a cell. Note that k = 1000.

Data Source

NodeB

Source Field

pmSumAackedBitsCellEul

Source Section

EDchResources

pmSumNackedBitsCellEul

PEG counter for the total amount of nacked data received in kbits after HARQ process on MAC-e level for all users in a cell. Note that k = 1000.

Data Source

NodeB

Source Field

pmSumNackedBitsCellEul

Source Section

EDchResources

pmTotalRotCoverage_00

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range <0.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_01

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 0.5..1.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_02

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 1.0..1.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_03

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 1.5..2.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_04

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 2.0..2.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_05

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 2.5..3.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_06

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 3.0..3.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_07

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 3.5..4.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_08

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 4.0..4.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_09

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 4.5..5.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_10

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 5.0..5.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_11

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 5.5..6.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_12

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 6.0..6.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_13

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 6.5..7.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_14

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 7.0..7.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_15

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 7.5..8.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_16

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 8.0..8.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_17

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 8.5..9.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_18

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 9.0..9.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_19

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 9.5..10.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_20

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 10.0..10.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_21

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 10.5..11.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_22

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 11.0..11.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_23

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 11.5..12.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_24

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 12.0..12.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_25

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 12.5..13.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_26

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 13.0..13.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_27

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 13.5..14.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_28

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 14.0..14.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_29

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 14.5..15.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_30

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 15.0..15.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_31

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 15.5..16.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_32

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 16.0..16.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_33

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 16.5..17.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_34

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 17.0..17.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_35

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 17.5..18.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_36

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 18.0..18.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_37

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 18.5..19.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_38

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 19.0..19.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_39

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 19.5..20.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_40

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 20.0..20.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_41

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 20.5..21dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_42

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 21..21.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_43

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 21.5..22.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_44

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 22.0..22.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_45

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 22.5..23.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_46

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 23.0..23.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_47

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 23.5..24.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_48

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 24.0..24.5dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_49

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range 24.5..25.0dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotalRotCoverage_50

Counter per cell for the total Rise over Thermal (RoT) (including all uplink traffic and external interference) that affects the coverage. Number of samples in range ≥ 25.0 dB

Data Source

NodeB

Source Field

pmTotalRotCoverage

Source Section

EDchResources

pmTotRateGrantedEul_00

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 0..100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_01

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 100..200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_02

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 200..300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_03

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 300..400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_04

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 400..500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_05

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 500..600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_06

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 600..700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_07

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 700..800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_08

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 800..900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_09

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 900..1000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_10

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1000..1100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_11

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1100..1200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_12

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1200..1300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_13

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1300..1400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_14

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1400..1500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_15

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1500..1600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_16

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1600..1700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_17

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1700..1800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_18

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1800..1900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_19

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 1900..2000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_20

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2000..2100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_21

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2100..2200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_22

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2200..2300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_23

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2300..2400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_24

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2400..2500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_25

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2500..2600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_26

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2600..2700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_27

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2700..2800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_28

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2800..2900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_29

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 2900..3000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_30

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3000..3100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_31

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3100..3200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_32

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3200..3300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_33

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3300..3400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_34

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3400..3500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_35

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3500..3600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_36

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3600..3700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_37

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3700..3800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_38

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3800..3900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_39

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 3900..4000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_40

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4000..4100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_41

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4100..4200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_42

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4200..4300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_43

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4300..4400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_44

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4400..4500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_45

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4500..4600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_46

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4600..4700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_47

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4700..4800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_48

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4800..4900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_49

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 4900..5000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_50

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5000..5100kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_51

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5100..5200kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_52

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5200..5300kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_53

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5300..5400kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_54

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5400..5500kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_55

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5500..5600kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_56

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5600..5700kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_57

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5700..5800kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_58

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5800..5900kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_59

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range 5900..6000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmTotRateGrantedEul_60

Counter for the total granted Uu rate for all E-DCH users including soft/softer handover by the scheduler per cell. Number of samples in range >= 6000kbps

Data Source

NodeB

Source Field

pmTotRateGrantedEul

Source Section

EDchResources

pmWaitingTimeEul_00

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 0..10ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_01

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 10..20ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_02

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 20..30ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_03

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 30..40ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_04

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 40..50ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_05

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 50..60ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_06

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 60..70ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_07

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 70..80ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_08

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 80..90ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_09

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 90..100ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_10

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 100..200ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_11

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 200..300ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_12

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 300..400ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_13

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 400..500ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_14

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 500..600ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_15

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 600..700ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_16

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 700..800ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_17

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 800..900ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_18

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 900..1000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_19

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 1000..2000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_20

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 2000..3000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_21

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 3000..4000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_22

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 4000..5000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_23

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 5000..6000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_24

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 6000..7000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_25

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 7000..8000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_26

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 8000..9000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_27

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range 9000..10000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

pmWaitingTimeEul_28

Counter for the waiting time in ms for an E-DCH user from when a rate increase request is received when the scheduled grant = 0 to when a scheduled grant >0 is sent to the UE with an absolute grant. Number of samples in range >= 10000ms

Data Source

NodeB

Source Field

pmWaitingTimeEul

Source Section

EDchResources

Equipment_NodeB Primitive Calculations

The following is a list of primitive calculations for the Equipment_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Equipment_RNC Primitive Calculations

The following is a list of primitive calculations for the Equipment_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

MainProcessorLoadRNC_Equipment

Main CPU load % (based on Operating System Enea function) filtered on Subrack=MS.

Calculation

```
AGGR (Subrack_RNC[LocalKey == "MS"], MainProcessorLoadRNC_Subrack)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT ()
```

NUMHOURS

of hours in Summation Data

Calculation

EthernetLink_NodeB Primitive Calculations

The following is a list of primitive calculations for the EthernetLink_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT ()`

NUMHOURS

of hours in Summation Data

Calculation

Received_Packets_Ethernet_Link_NodeB

Received Packets in IP Ethernet Link Layer

Calculation

`vsum (pmNoOfIfInNUcastPkts, pmNoOfIfInUcastPkts)`

Sent_Packets_IP_Ethernet_Link_NodeB

Sent Packets in IP Ethernet Link Layer

Calculation

`vsum (pmNoOfIfOutNUcastPkts, pmNoOfIfOutUcastPkts)`

EthernetLink_NodeB Peg Counts

The following is a list of peg counts for the EthernetLink_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

EthernetLink_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

EthernetLink_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

EthernetLink_NodeB_WMGeneral

pmNoOffInDiscards

Number of input packets discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOffInDiscards

Source Section

EthernetLink_NodeB

pmNoOffInErrors

Number of input packets discarded due to any error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInErrors

Source Section

EthernetLink_NodeB

pmNoOfIfInNUcastPkts

Number of input broadcast/multicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInNUcastPkts

Source Section

EthernetLink_NodeB

pmNoOfIfInUcastPkts

Number of input unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInUcastPkts

Source Section

EthernetLink_NodeB

pmNoOfIfOutNUcastPkts

Number of output broadcast/multicast packets delivered to higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutNUcastPkts

Source Section

EthernetLink_NodeB

pmNoOfIfOutUcastPkts

Number of out unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutUcastPkts

Source Section

EthernetLink_NodeB

EthernetLink_RNC Primitive Calculations

The following is a list of primitive calculations for the EthernetLink_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Received_Packets_Ethernet_Link_RNC

Sent Packets in IP Ethernet Link Layer

Calculation

`vsum (pmNoOfIfOutNUcastPkts, pmNoOfIfOutUcastPkts)`

EthernetLink_RNC Peg Counts

The following is a list of peg counts for the EthernetLink_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

EthernetLink_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

EthernetLink_RNC_WMGeneral

pmNoOfIfInDiscards

Number of input packets discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInDiscards

Source Section

EthernetLink_RNC

pmNoOfIfInErrors

Number of input packets discarded due to any error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInErrors

Source Section

EthernetLink_RNC

pmNoOfIfInNUcastPkts

Number of input broadcast/multicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInNUcastPkts

Source Section

EthernetLink_RNC

pmNoOfIfInUcastPkts

Number of input unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOffInUcastPkts

Source Section

EthernetLink_RNC

pmNoOffOutNUcastPkts

Number of output broadcast/multicast packets delivered to higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOffOutNUcastPkts

Source Section

EthernetLink_RNC

pmNoOffOutUcastPkts

Number of out unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOffOutUcastPkts

Source Section

EthernetLink_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

EthernetLink_RNC

Etm1_NodeB Primitive Calculations

The following is a list of primitive calculations for the Etm1_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Etm1_RNC Primitive Calculations

The following is a list of primitive calculations for the Etm1_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Etm4_NodeB Primitive Calculations

The following is a list of primitive calculations for the Etm4_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Etm4_RNC Primitive Calculations

The following is a list of primitive calculations for the Etm4_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

FastEthernet_NodeB Primitive Calculations

The following is a list of primitive calculations for the FastEthernet_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

pmIfInOctets

The total number of octets received on the interface, including framing characters.

Calculation

pmIfInOctetsHi + pmIfInOctetsLo

pmIfOutOctets

The total number of octets transmitted out on the interface, including framing characters.

Calculation

pmIfOutOctetsHi + pmIfOutOctetsLo

FastEthernet_NodeB Peg Counts

The following is a list of peg counts for the FastEthernet_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RXI

Source Field

gp

Source Section

FastEthernet

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

gp

Source Section

FastEthernet

pmIfInBroadcastPkts

The number of broadcast packets, delivered by this sublayer to a higher (sub-)layer, that were addressed to a broadcast address at this sublayer. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInBroadcastPkts

Source Section

FastEthernet

pmIfInDiscards

The number of inbound packets that were chosen to be discarded even though no errors had been detected that prevented them from being delivered to a higher-layer protocol. One possible reason for discarding such a packet could be to free up buffer space. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInDiscards

Source Section

FastEthernet

pmIfInErrors

Number of input packets discarded due to any error. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInErrors

Source Section

FastEthernet

pmIfInMulticastPkts

The number of multicast packets, delivered by this sublayer to a higher (sub-)layer, that were addressed to a multicast address at this sublayer. For a MAC layer protocol, this includes both Group and Functional addresses. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInMulticastPkts

Source Section

FastEthernet

pmIfInOctetsHi

The total number of octets received on the interface, including framing characters. Note: The high-capacity counter for octets received on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets received on the interface. The two most significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsHi (bit 62-31) and pmIfInOctets (bit 30-0). For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInOctetsHi * 2147483648

Source Section

FastEthernet

pmIfInOctetsLo

The total number of octets received on the interface, including framing characters. Note: The high-capacity counter for octets received on an interface has been split into two parts. This counter represents the lower part of the 62 least-significant bits of the high-capacity counter for octets received on the interface. The two most significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsHi (bit 62-31) and pmIfInOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInOctetsLo

Source Section

FastEthernet

pmIfInUcastPkts

The number of unicast packets, delivered by this sublayer to a higher (sub-)layer, that were not addressed to a multicast or broadcast address at this sublayer. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUcastPkts

Source Section

FastEthernet

pmIfInUnknownProtos

The number of packets received that had a protocol not supported or unknown. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUnknownProtos

Source Section

FastEthernet

pmIfOutBroadcastPkts

The total number of broadcast packets that higher-level protocols requested to be transmitted, and which were addressed to a broadcast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutBroadcastPkts

Source Section

FastEthernet

pmIfOutDiscards

The number of packets requested to be transmitted, but which were discarded due to lack of resources (for example, buffer space). For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutDiscards

Source Section

FastEthernet

pmIfOutErrors

The number of packets requested to be transmitted, but which were discarded due to errors found in the packets. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutErrors

Source Section

FastEthernet

pmIfOutMulticastPkts

The total number of multicast packets that higher-level protocols requested to be transmitted, and which were addressed to a multicast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutMulticastPkts

Source Section

FastEthernet

pmIfOutOctetsHi

The total number of octets transmitted out on the interface, including framing characters. Note: The high-capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least-significant bits of the high-capacity counter for octets transmitted out on the interface. The two most-significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsHi (bit 62-31) and pmIfOutOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsHi * 2147483648

Source Section

FastEthernet

pmIfOutOctetsLo

The total number of octets transmitted out on the interface, including framing characters. Note: The high-capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the lower part of the 62 least-significant bits of the high-capacity counter for octets transmitted out on the interface. The two most-significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsHi (bit 62-31) and pmIfOutOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsLo

Source Section

FastEthernet

pmIfOutUcastPkts

The total number of unicast packets that higher-level protocols requested to be transmitted, and which were not addressed to a multicast or broadcast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutUcastPkts

Source Section

FastEthernet

FastEthernet_RNC Primitive Calculations

The following is a list of primitive calculations for the FastEthernet_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

pmIfInOctets

The total number of octets received on the interface, including framing characters.

Calculation

pmIfInOctetsHi + pmIfInOctetsLo

pmIfOutOctets

The total number of octets transmitted out on the interface, including framing characters.

Calculation

`pmIfOutOctetsHi + pmIfOutOctetsLo`

FastEthernet_RNC Peg Counts

The following is a list of peg counts for the FastEthernet_RNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

gp

Source Section

FastEthernet

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

gp

Source Section

FastEthernet

pmIfInBroadcastPkts

The number of broadcast packets, delivered by this sublayer to a higher (sub-)layer, that were addressed to a broadcast address at this sublayer. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInBroadcastPkts

Source Section

FastEthernet

pmIfInDiscards

The number of inbound packets that were chosen to be discarded even though no errors had been detected that prevented them from being delivered to a higher-layer protocol. One possible reason for discarding such a packet could be to free up buffer space. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInDiscards

Source Section

FastEthernet

pmIfInErrors

Number of input packets discarded due to any error. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInErrors

Source Section

FastEthernet

pmIfInMulticastPkts

The number of multicast packets, delivered by this sublayer to a higher (sub-)layer, that were addressed to a multicast address at this sublayer. For a MAC layer protocol, this includes both Group and Functional addresses. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInMulticastPkts

Source Section

FastEthernet

pmIfInOctetsHi

The total number of octets received on the interface, including framing characters. Note: The high-capacity counter for octets received on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets received on the interface. The two most significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsHi (bit 62-31) and pmIfInOctets (bit 30-0). For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsHi * 2147483648

Source Section

FastEthernet

pmIfInOctetsLo

The total number of octets received on the interface, including framing characters. Note: The high-capacity counter for octets received on an interface has been split into two parts. This counter represents the lower part of the 62 least-significant bits of the high-capacity counter for octets received on the interface. The two most significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsHi (bit 62-31) and pmIfInOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsLo

Source Section

FastEthernet

pmIfInUcastPkts

The number of unicast packets, delivered by this sublayer to a higher (sub-)layer, that were not addressed to a multicast or broadcast address at this sublayer. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInUcastPkts

Source Section

FastEthernet

pmIfInUnknownProtos

The number of packets received that had a protocol not supported or unknown. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInUnknownProtos

Source Section

FastEthernet

pmIfOutBroadcastPkts

The total number of broadcast packets that higher-level protocols requested to be transmitted, and which were addressed to a broadcast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutBroadcastPkts

Source Section

FastEthernet

pmIfOutDiscards

The number of packets requested to be transmitted, but which were discarded due to lack of resources (for example, buffer space). For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutDiscards

Source Section

FastEthernet

pmIfOutErrors

The number of packets requested to be transmitted, but which were discarded due to errors found in the packets. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutErrors

Source Section

FastEthernet

pmIfOutMulticastPkts

The total number of multicast packets that higher-level protocols requested to be transmitted, and which were addressed to a multicast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutMulticastPkts

Source Section

FastEthernet

pmIfOutOctetsHi

The total number of octets transmitted out on the interface, including framing characters. Note: The high-capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least-significant bits of the high-capacity counter for octets transmitted out on the interface. The two most-significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsHi (bit 62-31) and pmIfOutOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsHi * 2147483648

Source Section

FastEthernet

pmIfOutOctetsLo

The total number of octets transmitted out on the interface, including framing characters. Note: The high-capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the lower part of the 62 least-significant bits of the high-capacity counter for octets transmitted out on the interface. The two most-significant bits of this 64-bit counter are discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsHi (bit 62-31) and pmIfOutOctetsLo (bit 30-0). For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsLo

Source Section

FastEthernet

pmIfOutUcastPkts

The total number of unicast packets that higher-level protocols requested to be transmitted, and which were not addressed to a multicast or broadcast address at this sublayer, including those that were discarded or not sent. For additional info, refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutUcastPkts

Source Section

FastEthernet

FrameSynch Primitive Calculations

The following is a list of primitive calculations for the FrameSynch entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

FrameSynch Peg Counts

The following is a list of peg counts for the FrameSynch entity.

doStep

Downlink Offset step size. { long, Range = 0..10, Default=1 }

Data Source

Bulk CM

Source Section

DchFrameSynch

dto

Downlink Transport delay Offset. { long, Range = 1..200, Default=10 }

Data Source

Bulk CM

Source Section

DchFrameSynch

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UeRc_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

UeRc_WMGeneral

pmNoDchDITimingAdjContrFrames

Number of received Downlink Timing Adjustment Control Frames for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDchDITimingAdjContrFrames

Source Section

DchFrameSynch

pmNoDchUIDataFramesOutsideWindow

Number of uplink data frames received outside desired window for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDchUIDataFramesOutsideWindow

Source Section

DchFrameSynch

pmNoDlDchDiscardedDataFramesE

Number of discarded downlink data frames due to too-early reception for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDlDchDiscardedDataFramesE

Source Section

DchFrameSynch

pmNoDlDchDiscardedDataFramesL

Number of discarded downlink data frames due to too-late reception for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDlDchDiscardedDataFramesL

Source Section

DchFrameSynch

pmNoUlDchDiscardedDataFramesE

Number of discarded uplink data frames due to too-early reception for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoUlDchDiscardedDataFramesE

Source Section

DchFrameSynch

pmNoUlDchDiscardedDataFramesL

Number of discarded uplink data frames due to too-late reception for DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoUIDchDiscardedDataFramesL

Source Section

DchFrameSynch

reservedBy

Reference back to the MO(s) that uses this DchFrameSynch instance . {
sequence<ManagedObject,8>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

DchFrameSynch

RNC_Release

Release

Data Source

NodeB_RNC_RXI

Source Section

DchFrameSynch

toAE

Downlink, time of arrival early point. { long, Range = 0..1279, Default=195 }

Data Source

Bulk CM

Source Section

DchFrameSynch

toAEUI

Uplink, time of arrival early point. { long, Range = 0..1279, Default=95 }

Data Source

Bulk CM

Source Section

DchFrameSynch

toAWE

Downlink, time of arrival window endpoint. { long, Range = 0..2559, Default=2 }

Data Source

Bulk CM

Source Section

DchFrameSynch

toAWEUI

Uplink, time of arrival window endpoint. { long, Range = 0..2559, Default=2 }

Data Source

Bulk CM

Source Section

DchFrameSynch

toAWS

Downlink, time of arrival window startpoint. { long, Range = 0..1279, Default=30 }

Data Source

Bulk CM

Source Section

DchFrameSynch

toAWSUI

Uplink, time of arrival window startpoint. { long, Range = 0..1279, Default=40 }

Data Source

Bulk CM

Source Section

DchFrameSynch

tProcRbsDI

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

DchFrameSynch

tProcRbsUI

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

DchFrameSynch

tProcRncDI

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

DchFrameSynch

tProcRncUI

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

DchFrameSynch

uoStep

Uplink Offset step size. { long, Range = 0..10, Default=1 }

Data Source

Bulk CM

Source Section

DchFrameSynch

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default="" }

Data Source

Bulk CM

Source Section

DchFrameSynch

uto

Uplink Transport delay Offset. { long, Range = 1..200, Default=10 }

Data Source

Bulk CM

Source Section

DchFrameSynch

GeneralProcUnit_NodeB Primitive Calculations

The following is a list of primitive calculations for the GeneralProcUnit_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

GeneralProcUnit_NodeB Peg Counts

The following is a list of peg counts for the GeneralProcUnit_NodeB entity.

pmAdmittedRequestsB0

Number of admitted requests with priority B0

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsB0

Source Section

LoadControl

pmAdmittedRequestsB1

Number of admitted requests with priority B1

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsB1

Source Section

LoadControl

pmAdmittedRequestsF0

Number of admitted requests with priority F0

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsF0

Source Section

LoadControl

pmAdmittedRequestsF1

Number of admitted requests with priority F1

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsF1

Source Section

LoadControl

pmAdmittedRequestsF2

Number of admitted requests with priority F2

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsF2

Source Section

LoadControl

pmAdmittedRequestsF3

Number of admitted requests with priority F3

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsF3

Source Section

LoadControl

pmAdmittedRequestsF4

Number of admitted requests with priority F4

Data Source

NodeB_RXI

Source Field

pmAdmittedRequestsF4

Source Section

LoadControl

pmMeasuredLoad_0

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_1

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_2

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_3

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_4

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_5

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_6

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_7

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmRefusedRequestsB0

Number of rejected requests with priority B0

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsB0

Source Section

LoadControl

pmRefusedRequestsB1

Number of rejected requests with priority B1

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsB1

Source Section

LoadControl

pmRefusedRequestsF0

Number of rejected requests with priority F0

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsF0

Source Section

LoadControl

pmRefusedRequestsF1

Number of rejected requests with priority F1

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsF1

Source Section

LoadControl

pmRefusedRequestsF2

Number of rejected requests with priority F2

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsF2

Source Section

LoadControl

pmRefusedRequestsF3

Number of rejected requests with priority F3

Data Source

NodeB_RXI

Source Field

pmRefusedRequestsF3

Source Section

LoadControl

pmRefusedRequestsF4

Number of rejected requests with priority F4

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF4

Source Section

LoadControl

pmSamplesMeasuredLoad

Number of samples of the measured processor load

Source Field

pmSamplesMeasuredLoad

Source Section

LoadControl

pmSumMeasuredLoad

The sum of samples of the measured load. The load is measured in percentage (%).

Source Field

pmSumMeasuredLoad

Source Section

LoadControl

GeneralProcUnit_RNC Primitive Calculations

The following is a list of primitive calculations for the GeneralProcUnit_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_MeasuredLoad

Average value of all samples of the measured load in %

Calculation

(pmSumMeasuredLoad / pmSamplesMeasuredLoad) * 100.0

GeneralProcUnit_RNC Peg Counts

The following is a list of peg counts for the GeneralProcUnit_RNC entity.

pmAdmittedRequestsB0

Number of admitted requests with priority B0

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsB0

Source Section

LoadControl

pmAdmittedRequestsB1

Number of admitted requests with priority B1

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsB1

Source Section

LoadControl

pmAdmittedRequestsF0

Number of admitted requests with priority F0

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsF0

Source Section

LoadControl

pmAdmittedRequestsF1

Number of admitted requests with priority F1

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsF1

Source Section

LoadControl

pmAdmittedRequestsF2

Number of admitted requests with priority F2

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsF2

Source Section

LoadControl

pmAdmittedRequestsF3

Number of admitted requests with priority F3

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsF3

Source Section

LoadControl

pmAdmittedRequestsF4

Number of admitted requests with priority F4

Data Source

RNC_RXI

Source Field

pmAdmittedRequestsF4

Source Section

LoadControl

pmMeasuredLoad_0

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_1

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_2

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_3

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_4

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_5

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_6

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmMeasuredLoad_7

The processor load. Stored in percentage.

Data Source

RNC

Source Field

pmMeasuredLoad

Source Section

LoadControl

pmRefusedRequestsB0

Number of rejected requests with priority B0

Data Source

RNC_RXI

Source Field

pmRefusedRequestsB0

Source Section

LoadControl

pmRefusedRequestsB1

Number of rejected requests with priority B1

Data Source

RNC_RXI

Source Field

pmRefusedRequestsB1

Source Section

LoadControl

pmRefusedRequestsF0

Number of rejected requests with priority F0

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF0

Source Section

LoadControl

pmRefusedRequestsF1

Number of rejected requests with priority F1

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF1

Source Section

LoadControl

pmRefusedRequestsF2

Number of rejected requests with priority F2

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF2

Source Section

LoadControl

pmRefusedRequestsF3

Number of rejected requests with priority F3

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF3

Source Section

LoadControl

pmRefusedRequestsF4

Number of rejected requests with priority F4

Data Source

RNC_RXI

Source Field

pmRefusedRequestsF4

Source Section

LoadControl

pmSamplesMeasuredLoad

Number of samples of the measured processor load

Source Field

pmSamplesMeasuredLoad

Source Section

LoadControl

pmSumMeasuredLoad

The sum of samples of the measured load. The load is measured in percentage (%).

Source Field

pmSumMeasuredLoad

Source Section

LoadControl

GigaBitEthernet_NodeB Primitive Calculations

The following is a list of primitive calculations for the GigaBitEthernet_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

pmIfInOctetsLink1

The total number of octets received on the interface, including framing characters

Calculation

pmIfInOctetsLink1Hi + pmIfInOctetsLink1Lo

pmIfInOctetsLink2

The total number of octets received on the interface, including framing characters

Calculation

pmIfInOctetsLink2Hi + pmIfInOctetsLink2Lo

pmIfOutOctetsLink1

The total number of octets transmitted out of the interface, including framing characters.

Calculation

pmIfOutOctetsLink1Hi + pmIfOutOctetsLink1Lo

pmIfOutOctetsLink2

The total number of octets transmitted out of the interface, including framing characters.

Calculation

pmIfOutOctetsLink2Hi + pmIfOutOctetsLink2Lo

GigaBitEthernet_NodeB Peg Counts

The following is a list of peg counts for the GigaBitEthernet_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RXI

Source Field

gp

Source Section

GigaBitEthernet

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

gp

Source Section

GigaBitEthernet

pmDot1qTpVlanPortInDiscLink1

The number of valid frames discarded due to VLAN reasons (e.g. VLAN id not configured). See RFC 2674.

Data Source

NodeB_RXI

Source Field

pmDot1qTpVlanPortInDiscardsLink1

Source Section

GigaBitEthernet

pmDot1qTpVlanPortInDiscLink2

The number of valid frames discarded due to VLAN reasons (e.g. VLAN id not configured). See RFC 2674.

Data Source

NodeB_RXI

Source Field

pmDot1qTpVlanPortInDiscardsLink2

Source Section

GigaBitEthernet

pmIfInBroadcastPktsLink1

The number of packets received with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInBroadcastPktsLink1

Source Section

GigaBitEthernet

pmIfInBroadcastPktsLink2

The number of packets received with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInBroadcastPktsLink2

Source Section

GigaBitEthernet

pmIfInDiscardsLink1

The number of received packets discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInDiscardsLink1

Source Section

GigaBitEthernet

pmIfInDiscardsLink2

The number of received packets discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInDiscardsLink2

Source Section

GigaBitEthernet

pmIfInErrorsLink1

The number of packets received which were discarded due to errors found in the packets. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInErrorsLink1

Source Section

GigaBitEthernet

pmIfInErrorsLink2

The number of packets received which were discarded due to errors found in the packets. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInErrorsLink2

Source Section

GigaBitEthernet

pmIfInMulticastPktsLink1

The number of packets received with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInMulticastPktsLink1

Source Section

GigaBitEthernet

pmIfInMulticastPktsLink2

The number of packets received with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInMulticastPktsLink2

Source Section

GigaBitEthernet

pmIfInOctetsLink1Hi

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIflnOctetsLink1Hi * 2147483648

Source Section

GigaBitEthernet

pmIflnOctetsLink1Lo

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets on an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIflnOctetsLinkxHi (bit 62-31) and pmIflnOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIflnOctetsLink1Lo

Source Section

GigaBitEthernet

pmIflnOctetsLink2Hi

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIflnOctetsLinkxHi (bit 62-31) and pmIflnOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIflnOctetsLink2Hi * 2147483648

Source Section

GigaBitEthernet

pmIfInOctetsLink2Lo

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInOctetsLink2Lo

Source Section

GigaBitEthernet

pmIfInUcastPktsLink1

The number of packets received which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUcastPktsLink1

Source Section

GigaBitEthernet

pmIfInUcastPktsLink2

The number of packets received which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUcastPktsLink2

Source Section

GigaBitEthernet

pmIfInUnknownProtosLink1

The number of packets received which had a protocol not supported or unknown. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUnknownProtosLink1

Source Section

GigaBitEthernet

pmIfInUnknownProtosLink2

The number of packets received which had a protocol not supported or unknown. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfInUnknownProtosLink2

Source Section

GigaBitEthernet

pmIfOutBroadcastPktsLink1

The number of packets requested to be transmitted with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutBroadcastPktsLink1

Source Section

GigaBitEthernet

pmIfOutBroadcastPktsLink2

The number of packets requested to be transmitted with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutBroadcastPktsLink2

Source Section

GigaBitEthernet

pmIfOutDiscardsLink1

The number of packets requested to be transmitted discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutDiscardsLink1

Source Section

GigaBitEthernet

pmIfOutDiscardsLink2

The number of packets requested to be transmitted discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutDiscardsLink2

Source Section

GigaBitEthernet

pmIfOutErrorsLink1

The number of packets requested to be transmitted discarded due to errors found in the packets.
See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutErrorsLink1

Source Section

GigaBitEthernet

pmIfOutErrorsLink2

The number of packets requested to be transmitted discarded due to errors found in the packets.
See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutErrorsLink2

Source Section

GigaBitEthernet

pmIfOutMulticastPktsLink1

The number of packets requested to be transmitted with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutMulticastPktsLink1

Source Section

GigaBitEthernet

pmIfOutMulticastPktsLink2

The number of packets requested to be transmitted with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutMulticastPktsLink2

Source Section

GigaBitEthernet

pmIfOutOctetsLink1Hi

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsLink1Hi * 2147483648

Source Section

GigaBitEthernet

pmIfOutOctetsLink1Lo

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter

for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsLink1Lo

Source Section

GigaBitEthernet

pmIfOutOctetsLink2Hi

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsLink2Hi * 2147483648

Source Section

GigaBitEthernet

pmIfOutOctetsLink2Lo

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutOctetsLink2Lo

Source Section

GigaBitEthernet

pmIfOutUcastPktsLink1

The number of packets requested to be transmitted which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutUcastPktsLink1

Source Section

GigaBitEthernet

pmIfOutUcastPktsLink2

The number of packets requested to be transmitted which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

NodeB_RXI

Source Field

pmIfOutUcastPktsLink2

Source Section

GigaBitEthernet

GigaBitEthernet_RNC Primitive Calculations

The following is a list of primitive calculations for the GigaBitEthernet_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

pmIfInOctetsLink1

The total number of octets received on the interface, including framing characters

Calculation

pmIfInOctetsLink1Hi + pmIfInOctetsLink1Lo

pmIfInOctetsLink2

The total number of octets received on the interface, including framing characters

Calculation

pmIfInOctetsLink2Hi + pmIfInOctetsLink2Lo

pmIfOutOctetsLink1

The total number of octets transmitted out of the interface, including framing characters.

Calculation

pmIfOutOctetsLink1Hi + pmIfOutOctetsLink1Lo

pmIfOutOctetsLink2

The total number of octets transmitted out of the interface, including framing characters.

Calculation

pmIfOutOctetsLink2Hi + pmIfOutOctetsLink2Lo

GigaBitEthernet_RNC Peg Counts

The following is a list of peg counts for the GigaBitEthernet_RNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

gp

Source Section

GigaBitEthernet

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

gp

Source Section

GigaBitEthernet

pmDot1qTpVlanPortInDiscLink1

The number of valid frames discarded due to VLAN reasons (e.g. VLAN id not configured). See RFC 2674.

Data Source

RNC_RXI

Source Field

pmDot1qTpVlanPortInDiscardsLink1

Source Section

GigaBitEthernet

pmDot1qTpVlanPortInDiscLink2

The number of valid frames discarded due to VLAN reasons (e.g. VLAN id not configured).
See RFC 2674.

Data Source

RNC_RXI

Source Field

pmDot1qTpVlanPortInDiscardsLink2

Source Section

GigaBitEthernet

pmIfInBroadcastPktsLink1

The number of packets received with a broadcast address delivered to a higher sub-layer. See
RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInBroadcastPktsLink1

Source Section

GigaBitEthernet

pmIfInBroadcastPktsLink2

The number of packets received with a broadcast address delivered to a higher sub-layer. See
RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInBroadcastPktsLink2

Source Section

GigaBitEthernet

pmIfInDiscardsLink1

The number of received packets discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInDiscardsLink1

Source Section

GigaBitEthernet

pmIfInDiscardsLink2

The number of received packets discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInDiscardsLink2

Source Section

GigaBitEthernet

pmIfInErrorsLink1

The number of packets received which were discarded due to errors found in the packets. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInErrorsLink1

Source Section

GigaBitEthernet

pmIfInErrorsLink2

The number of packets received which were discarded due to errors found in the packets. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInErrorsLink2

Source Section

GigaBitEthernet

pmIfInMulticastPktsLink1

The number of packets received with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInMulticastPktsLink1

Source Section

GigaBitEthernet

pmIfInMulticastPktsLink2

The number of packets received with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInMulticastPktsLink2

Source Section

GigaBitEthernet

pmIfInOctetsLink1Hi

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsLink1Hi * 2147483648

Source Section

GigaBitEthernet

pmIfInOctetsLink1Lo

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsLink1Lo

Source Section

GigaBitEthernet

pmIfInOctetsLink2Hi

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsLink2Hi * 2147483648

Source Section

GigaBitEthernet

pmIfInOctetsLink2Lo

The total number of octets received on the interface, including framing characters. Note: The high capacity counter for received octets an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for received octets. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfInOctetsLinkxHi (bit 62-31) and pmIfInOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInOctetsLink2Lo

Source Section

GigaBitEthernet

pmIfInUcastPktsLink1

The number of packets received which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfInUcastPktsLink1

Source Section

GigaBitEthernet

pmIflnUcastPktsLink2

The number of packets received which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIflnUcastPktsLink2

Source Section

GigaBitEthernet

pmIflnUnknownProtosLink1

The number of packets received which had a protocol not supported or unknown. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIflnUnknownProtosLink1

Source Section

GigaBitEthernet

pmIflnUnknownProtosLink2

The number of packets received which had a protocol not supported or unknown. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIflnUnknownProtosLink2

Source Section

GigaBitEthernet

pmIfOutBroadcastPktsLink1

The number of packets requested to be transmitted with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutBroadcastPktsLink1

Source Section

GigaBitEthernet

pmIfOutBroadcastPktsLink2

The number of packets requested to be transmitted with a broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutBroadcastPktsLink2

Source Section

GigaBitEthernet

pmIfOutDiscardsLink1

The number of packets requested to be transmitted discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutDiscardsLink1

Source Section

GigaBitEthernet

pmIfOutDiscardsLink2

The number of packets requested to be transmitted discarded due to lack of resources (e.g. buffer space). See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutDiscardsLink2

Source Section

GigaBitEthernet

pmIfOutErrorsLink1

The number of packets requested to be transmitted discarded due to errors found in the packets. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutErrorsLink1

Source Section

GigaBitEthernet

pmIfOutErrorsLink2

The number of packets requested to be transmitted discarded due to errors found in the packets. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutErrorsLink2

Source Section

GigaBitEthernet

pmIfOutMulticastPktsLink1

The number of packets requested to be transmitted with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutMulticastPktsLink1

Source Section

GigaBitEthernet

pmIfOutMulticastPktsLink2

The number of packets requested to be transmitted with a multicast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutMulticastPktsLink2

Source Section

GigaBitEthernet

pmIfOutOctetsLink1Hi

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsLink1Hi * 2147483648

Source Section

GigaBitEthernet

pmIfOutOctetsLink1Lo

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the lower part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsLink1Lo

Source Section

GigaBitEthernet

pmIfOutOctetsLink2Hi

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts. This counter represents the higher part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsLink2Hi * 2147483648

Source Section

GigaBitEthernet

pmIfOutOctetsLink2Lo

The total number of octets transmitted out of the interface, including framing characters. Note: The high capacity counter for octets transmitted out on an interface has been split into two parts.

This counter represents the lower part of the 62 least significant bits of the high capacity counter for octets transmitted out on the interface. The two most significant bit of this 64 bit counter is discarded. This 64-bit counter is presented as 2*31 bits: pmIfOutOctetsLinkxHi (bit 62-31) and pmIfOutOctetsLinkxLo (bit 30-0). For additional info refer to RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutOctetsLink2Lo

Source Section

GigaBitEthernet

pmIfOutUcastPktsLink1

The number of packets requested to be transmitted which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutUcastPktsLink1

Source Section

GigaBitEthernet

pmIfOutUcastPktsLink2

The number of packets requested to be transmitted which was not addressed to a broadcast or broadcast address delivered to a higher sub-layer. See RFC 2863.

Data Source

RNC_RXI

Source Field

pmIfOutUcastPktsLink2

Source Section

GigaBitEthernet

GsmRelation Primitive Calculations

The following is a list of primitive calculations for the GsmRelation entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

GSM_Cell_Change_Failure_Rate_PS_Interactive

Cell change failure rate between UtranCell and target GSM cell for PS calls when the UE successfully returns to UtranCell

Calculation

$100.0 * \text{pmNoOutIratCcReturnOldCh} / \text{pmNoOutIratCcAtt}$

GSM_Handover_Success_Rate_Multi_RAB

Hard handover success rate between UtranCell and target GSM cell for Multi-RAB calls.

Calculation

$100.0 * \text{pmNoSuccessOutIratHoMulti} / \text{pmNoAttOutIratHoMulti}$

GSM_Handover_Success_Rate_Speech

Inter Radio Access Technology (GSM) Handover Success Rate for SpeechThe following metric measures hard handover success rate between UtranCell and target GSM cell for speech calls.

Calculation

$100.0 * \text{pmNoSuccessOutIratHoSpeech} / \text{pmNoAttOutIratHoSpeech}$

GSM_Handover_Success_Rate_Streaming_CS_57

Hard handover success rate between UtranCell and target GSM cell for CS streaming calls.

Calculation

$100.0 * \text{pmNoSuccessOutIratHoCs57} / \text{pmNoAttOutIratHoCs57}$

GSM_HO_OUT_FAIL

UMTS to GSM circuit switched handover failure rate %

Calculation

$(\text{pmNoOutIratHoAtt} - \text{pmNoOutIratHoSuccess}) * 100.0 / \text{pmNoOutIratHoAtt}$

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

GsmRelation Peg Counts

The following is a list of peg counts for the GsmRelation entity.

adjacentCell

Pointer to GSM cell or external GSM cell. Distinguished Name of the corresponding object.

Data Source

Bulk CM

Source Field

gn:adjacentCell

Source Section

GsmRelation

bcc

Base station colour code, BCC (part of BSIC. Ref 3GPP TS 44.018 [4]) for the external GSM cell, that is broadcast in System Information in the Cell. The external GSM cell identity. This is the identity of the GSM cell. It is unique within a location area. The cI along with the LAI (Location area identity) makes up the CGI (cell global identification).

Data Source

Bulk CM

Source Field

gn:bcc

Source Section

ExternalGsmCell

bcchFrequency

This attribute contains the absolute radio frequency channel number of the BCCH channel of the external GSM cell, that is broadcast in System Information in the Cell.

Data Source

Bulk CM

Source Field

gn:bcchFrequency

Source Section

ExternalGsmCell

cellIdentity

Cell Identity (Ref 3GPP TS 24.008 [3]).

Data Source

Bulk CM

Source Field

gn:cellIdentity

Source Section

ExternalGsmCell

lac

Location Area Code, LAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

gn:lac

Source Section

ExternalGsmCell

mcc

Mobile Country Code, MCC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

gn:mcc

Source Section

ExternalGsmCell

mnc

Mobile Network Code, MNC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

gn:mnc

Source Section

ExternalGsmCell

mobilityRelationType

Type of the mobility relation. { string, Default= HO_AND_CELL_RESEL }

Data Source

Bulk CM

Source Section

GsmRelation

ncc

Network Colour Code, NCC (part of BSIC. Ref 3GPP TS 44.018 [4]) for the external GSM cell, that is broadcast in System Information in the Cell.

Data Source

Bulk CM

Source Field

gn:ncc

Source Section

ExternalGsmCell

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

GsmRelation

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

GsmRelation_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

GsmRelation_WMGeneral

pmNoAttOutIratHoCs57

Number of attempted outgoing (to GSM) inter-RAT handover for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoAttOutIratHoMulti

Number of attempted outgoing (to GSM) inter-RAT handover for 'multi RAB' for the best cell in the active set.

pmNoAttOutIratHoSpeech

Number of attempted outgoing (to GSM) inter-RAT handover for 'Conversational speech RAB' for the best cell in the active set.

pmNoAttOutIratHoStandalone

Number of attempted outgoing (to GSM) inter-RAT handover for 'Standalone signalling connection' for the best cell in the active set.

pmNoAttOutSbHoSpeech

Number of attempted outgoing Service Based GSM Handover for 'Conversational speech RAB' for the best cell in the active set.

Data Source

RNC

Source Field

pmNoAttOutSbHoSpeech

Source Section

GsmRelation

pmNoFailOutIratHoCs57GsmFailure

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoFailOutIratHoCs57ReturnOldChNotPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoFailOutIratHoCs57ReturnOldChPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoFailOutIratHoCs57UeRejection

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoFailOutIratHoMultiGsmFailure

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'multi RAB' for the best cell in the active set.

pmNoFailOutIratHoMultiReturnOldChNotPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'multi RAB' for the best cell in the active set.

pmNoFailOutIratHoMultiReturnOldChPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'multi RAB' for the best cell in the active set.

pmNoFailOutIratHoMultiUeRejection

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'multi RAB' for the best cell in the active set.

pmNoFailOutIratHoSpeechGsmFailure

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'Conversational speech RAB' for the best cell in the active set.

pmNoFailOutIratHoSpeechReturnOldChNotPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.

pmNoFailOutIratHoSpeechReturnOldChPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.

pmNoFailOutIratHoSpeechUeRejection

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'Conversational speech RAB' for the best cell in the active set.

pmNoFailOutIratHoStandaloneGsmFailure

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'Standalone signalling connection' for the best cell in the active set.

pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'Standalone signalling connection' for the best cell in the active set.

Data Source

RNC

Source Field

pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail

Source Section

GsmRelation

pmNoFailOutIratHoStandaloneReturnOldNotChPhyChFail

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'Standalone signalling connection' for the best cell in the active set.

pmNoFailOutIratHoStandaloneUeRejection

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'Standalone signalling connection' for the best cell in the active set.

pmNoFailOutSbHoSpeechGsmFailure

Number of failed outgoing Service Based GSM Handover due to GSM resource allocation failure, for 'Conversational speech RAB' for the best cell in the active set.

Source Field

pmNoFailOutSbHoSpeechGsmFailure

Source Section

GsmRelation

pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail

Number of failed outgoing Service Based GSM Handover due to reasons other than physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.

Source Field

pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail

Source Section

GsmRelation

pmNoFailOutSbHoSpeechReturnOldChPhyChFail

Number of failed outgoing Service Based GSM Handover due to physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.

Source Field

pmNoFailOutSbHoSpeechReturnOldChPhyChFail

Source Section

GsmRelation

pmNoFailOutSbHoSpeechUeRejection

Number of failed outgoing Service Based GSM Handover, rejected by UE, for 'Conversational speech RAB' for the best cell in the active set.

Source Field

pmNoFailOutSbHoSpeechUeRejection

Source Section

GsmRelation

pmNoOutIratCcAtt

Total number of the PS Inter-RATCC attempts on DCH

Data Source

NodeB_RNC_RXI

Source Field

pmNoOutIratCcAtt

Source Section

GsmRelation

pmNoOutIratCcReturnOldCh

Total number of the PS Inter-RATCC attempts for UE on DCH where the UE returns to old channel

Data Source

NodeB_RNC_RXI

Source Field

pmNoOutIratCcReturnOldCh

Source Section

GsmRelation

pmNoOutIratCcSuccess

Number of successful PS Inter RAT cell change attempts for UE on dedicated channel. The counter is triggered by CN Iu Release Command following the sending of the CELL CHANGE ORDER FROM UTRAN message.

Data Source

RNC

Source Field

pmNoOutIratCcSuccess

Source Section

GsmRelation

pmNoSuccessOutIratHoCs57

Number of successful outgoing (to GSM) inter-RAT handover for 'streaming 57.6 kbps CS RAB' for the best cell in the active set.

pmNoSuccessOutIratHoMulti

Number of attempted outgoing (to GSM) inter-RAT handover for 'multi RAB' for the best cell in the active set.

pmNoSuccessOutIratHoSpeech

Number of successful outgoing (to GSM) inter-RAT handover for 'Conversational speech RAB' for the best cell in the active set.

pmNoSuccessOutIratHoStandalone

Number of attempted outgoing (to GSM) inter-RAT handover for 'Standalone signalling connection' for the best cell in the active set.

pmNoSuccessOutSbHoSpeech

Number of successful outgoing Service Based GSM Handover for 'Conversational speech RAB' for the best cell in the active set.

Data Source

RNC

Source Field

pmNoSuccessOutSbHoSpeech

Source Section

GsmRelation

priority

Priority for GSM handover

Data Source

Bulk CM

Source Field

lu:priority

Source Section

GsmRelation

qOffset1sn

Signal strength offset between source and target cells. Used when the IE cell_selection_and_reselection_quality_measure in SIB 11/12 is set to "CPICH RSCP". { long, Range = -50..50, Default=7 }

Data Source

Bulk CM

Source Section

GsmRelation

rac

Routing Area Code, RAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

gn:rac

Source Section

ExternalGsmCell

racc

Routing Area Colour Code, RACC. Ref 3GPP TS 44.018 [4].

Data Source

Bulk CM

Source Field

gn:racc

Source Section

ExternalGsmCell

userLabel

A user-friendly (and user assigned) name of the associated object.

Data Source

Bulk CM

Source Field

gn:userLabel

Source Section

ExternalGsmCell

GttService Primitive Calculations

The following is a list of primitive calculations for the GttService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

GttService Peg Counts

The following is a list of peg counts for the GttService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

GttService_Gen

pmForcedRelease

The total number of forced device releases.

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

GttService

pmNormalRelease

The total number of normal device releases.

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

GttService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

GttService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

GttService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

HsDschResources Primitive Calculations

The following is a list of primitive calculations for the HsDschResources entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

pmTransmCarrierPowerNonHsP5MD_01

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 25 .. 25.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_051

pmTransmCarrierPowerNonHsP5MD_02

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 25.5 .. 26 dBm

Calculation

pmTransmittedCarrierPowerNonHs_052

pmTransmCarrierPowerNonHsP5MD_03

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 26 .. 26.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_053

pmTransmCarrierPowerNonHsP5MD_04

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 26.5 .. 27 dBm

Calculation

pmTransmittedCarrierPowerNonHs_054

pmTransmCarrierPowerNonHsP5MD_05

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 27 .. 27.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_055

pmTransmCarrierPowerNonHsP5MD_06

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 27.5 .. 28 dBm

Calculation

pmTransmittedCarrierPowerNonHs_056

pmTransmCarrierPowerNonHsP5MD_07

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 28 .. 28.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_057

pmTransmCarrierPowerNonHsP5MD_08

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 28.5 .. 29 dBm

Calculation

pmTransmittedCarrierPowerNonHs_058

pmTransmCarrierPowerNonHsP5MD_09

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 29 .. 29.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_059

pmTransmCarrierPowerNonHsP5MD_10

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 29.5 .. 30 dBm

Calculation

pmTransmittedCarrierPowerNonHs_060

pmTransmCarrierPowerNonHsP5MD_11

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 30 .. 30.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_061

pmTransmCarrierPowerNonHsP5MD_12

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 30.5 .. 31 dBm

Calculation

pmTransmittedCarrierPowerNonHs_062

pmTransmCarrierPowerNonHsP5MD_13

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 31 .. 31.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_063

pmTransmCarrierPowerNonHsP5MD_14

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 31.5 .. 32 dBm

Calculation

pmTransmittedCarrierPowerNonHs_064

pmTransmCarrierPowerNonHsP5MD_15

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 32 .. 32.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_065

pmTransmCarrierPowerNonHsP5MD_16

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 32.5 .. 33 dBm

Calculation

pmTransmittedCarrierPowerNonHs_066

pmTransmCarrierPowerNonHsP5MD_17

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 33 .. 33.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_067

pmTransmCarrierPowerNonHsP5MD_18

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 33.5 .. 34 dBm

Calculation

pmTransmittedCarrierPowerNonHs_068

pmTransmCarrierPowerNonHsP5MD_19

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 34 .. 34.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_069

pmTransmCarrierPowerNonHsP5MD_20

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 34.5 .. 35 dBm

Calculation

pmTransmittedCarrierPowerNonHs_070

pmTransmCarrierPowerNonHsP5MD_21

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 35 .. 35.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_071

pmTransmCarrierPowerNonHsP5MD_22

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 35.5 .. 36 dBm

Calculation

pmTransmittedCarrierPowerNonHs_072

pmTransmCarrierPowerNonHsP5MD_23

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 36 .. 36.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_073

pmTransmCarrierPowerNonHsP5MD_24

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 36.5 .. 37 dBm

Calculation

pmTransmittedCarrierPowerNonHs_074

pmTransmCarrierPowerNonHsP5MD_25

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 37 .. 37.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_075

pmTransmCarrierPowerNonHsP5MD_26

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 37.5 .. 38 dBm

Calculation

pmTransmittedCarrierPowerNonHs_076

pmTransmCarrierPowerNonHsP5MD_27

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 38 .. 38.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_077

pmTransmCarrierPowerNonHsP5MD_28

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 38.5 .. 39 dBm

Calculation

pmTransmittedCarrierPowerNonHs_078

pmTransmCarrierPowerNonHsP5MD_29

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 39 .. 39.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_079

pmTransmCarrierPowerNonHsP5MD_30

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 39.5 .. 40 dBm

Calculation

pmTransmittedCarrierPowerNonHs_080

pmTransmCarrierPowerNonHsP5MD_31

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 40 .. 40.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_081

pmTransmCarrierPowerNonHsP5MD_32

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 40.5 .. 41 dBm

Calculation

pmTransmittedCarrierPowerNonHs_082

pmTransmCarrierPowerNonHsP5MD_33

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 41 .. 41.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_083

pmTransmCarrierPowerNonHsP5MD_34

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 41.5 .. 42 dBm

Calculation

pmTransmittedCarrierPowerNonHs_084

pmTransmCarrierPowerNonHsP5MD_35

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 42 .. 42.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_085

pmTransmCarrierPowerNonHsP5MD_36

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 42.5 .. 43 dBm

Calculation

pmTransmittedCarrierPowerNonHs_086

pmTransmCarrierPowerNonHsP5MD_37

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 43 .. 43.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_087

pmTransmCarrierPowerNonHsP5MD_38

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 43.5 .. 44 dBm

Calculation

pmTransmittedCarrierPowerNonHs_088

pmTransmCarrierPowerNonHsP5MD_39

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 44 .. 44.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_089

pmTransmCarrierPowerNonHsP5MD_40

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 44.5 .. 45 dBm

Calculation

pmTransmittedCarrierPowerNonHs_090

pmTransmCarrierPowerNonHsP5MD_41

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 45 .. 45.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_091

pmTransmCarrierPowerNonHsP5MD_42

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 45.5 .. 46 dBm

Calculation

pmTransmittedCarrierPowerNonHs_092

pmTransmCarrierPowerNonHsP5MD_43

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 46 .. 46.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_093

pmTransmCarrierPowerNonHsP5MD_44

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 46.5 .. 47 dBm

Calculation

pmTransmittedCarrierPowerNonHs_094

pmTransmCarrierPowerNonHsP5MD_45

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 47 .. 47.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_095

pmTransmCarrierPowerNonHsP5MD_46

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 47.5 .. 48 dBm

Calculation

pmTransmittedCarrierPowerNonHs_096

pmTransmCarrierPowerNonHsP5MD_47

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 48 .. 48.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_097

pmTransmCarrierPowerNonHsP5MD_48

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 48.5 .. 49 dBm

Calculation

pmTransmittedCarrierPowerNonHs_098

pmTransmCarrierPowerNonHsP5MD_49

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 49 .. 49.5 dBm

Calculation

pmTransmittedCarrierPowerNonHs_099

pmTransmCarrierPowerNonHsP5MD_50

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 49.5 .. 50 dBm

Calculation

pmTransmittedCarrierPowerNonHs_100

HsDschResources Peg Counts

The following is a list of peg counts for the HsDschResources entity.

NodeB_RELEASE

Release

Data Source

NodeB

Source Section

HsDschResources

PERLENSEC

Period Length

Data Source

NodeB

Source Field

perlensec

Source Section

HsDschResources_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB

Source Field

perlensec

Source Section

HsDschResources_WMGeneral

pmAck16Qam_01

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_02

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_03

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_04

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_05

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_06

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_07

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_08

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_09

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_10

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_11

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_12

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_13

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_14

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_15

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_16

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_17

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_18

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_19

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_20

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_21

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_22

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_23

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_24

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_25

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_26

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_27

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_28

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_29

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAck16Qam_30

Number of received ACKs for a specified transport block size with 16 Quadrature Amplitude Modulation (QAM). The number of successful Hybrid Automatic Repetition Request (HARQ) transmissions are counted on the Media Access Control high-speed (MAC-hs) layer

Data Source

NodeB

Source Field

pmAck16Qam

Source Section

HsDschResources

pmAckQpsk_01

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_02

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_03

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_04

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_05

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_06

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_07

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_08

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_09

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_10

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_11

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_12

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_13

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_14

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_15

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_16

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_17

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_18

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_19

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_20

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_21

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_22

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_23

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_24

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_25

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_26

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_27

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_28

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_29

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckQpsk_30

Number of received ACKs for a specified transport block size with Quadrature Phase Shift Keying (QPSK). The number of successful HARQ transmissions are counted on the MAC-hs layer.

Data Source

NodeB

Source Field

pmAckQpsk

Source Section

HsDschResources

pmAckReceived

The number of occasions when Acknowledgement (ACK) is received

Data Source

NodeB

Source Field

pmAckReceived

Source Section

HsDschResources

pmAverageUserRate_0

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 0 to 8

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_1

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 8 to 16

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_10

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 384 to 512

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_11

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 512 to 768

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_12

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 768 to 1024

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_13

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 1024 to 1536

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_14

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 1536 to 2048

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_15

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 2048 to 3072

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_16

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 3072 to 4096

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_17

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 4096 and upwards

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_2

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 16 to 32

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_3

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 32 to 48

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_4

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 48 to 64

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_5

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 64 to 96

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_6

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 96 to 128

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_7

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 128 to 192

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_8

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 192 to 256

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmAverageUserRate_9

The distribution of the average user rate among all users allocated to high-speed-DSCH in the cell in the range 256 to 384

Data Source

NodeB

Source Field

pmAverageUserRate

Source Section

HsDschResources

pmDelayDistrSpi00_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used

as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi00_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi00

Source Section

HsDschResources

pmDelayDistrSpi01_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi01_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi01

Source Section

HsDschResources

pmDelayDistrSpi02_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi02_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi02

Source Section

HsDschResources

pmDelayDistrSpi03_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi03_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi03

Source Section

HsDschResources

pmDelayDistrSpi04_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi04_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi04

Source Section

HsDschResources

pmDelayDistrSpi05_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi05_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi05

Source Section

HsDschResources

pmDelayDistrSpi06_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi06_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi06

Source Section

HsDschResources

pmDelayDistrSpi07_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi07_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi07

Source Section

HsDschResources

pmDelayDistrSpi08_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi08_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi08

Source Section

HsDschResources

pmDelayDistrSpi09_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi09_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi09

Source Section

HsDschResources

pmDelayDistrSpi10_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi10_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi10

Source Section

HsDschResources

pmDelayDistrSpi11_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi11_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi11

Source Section

HsDschResources

pmDelayDistrSpi12_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi12_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi12

Source Section

HsDschResources

pmDelayDistrSpi13_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi13_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi13

Source Section

HsDschResources

pmDelayDistrSpi14_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi14_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi14

Source Section

HsDschResources

pmDelayDistrSpi15_01

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_02

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_03

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_04

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_05

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling

delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_06

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_07

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_08

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_09

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_10

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmDelayDistrSpi15_11

Measurements to observe the distribution of the scheduling delay for scheduling priority class 00-15 on each subframe on those priority queue(s) selected for transmission. The scheduling delay is counted as a percentage of schMaxdelay of each priority class and 3000 ms will be used as a schMaxDelay in case it is set to -1. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmDelayDistributionSpi15

Source Section

HsDschResources

pmIubMacdPduCellReceivedBits

The number of bits received over Iub high-speed MAC-d PDU in the cell

Data Source

NodeB

Source Field

pmIubMacdPduCellReceivedBits

Source Section

HsDschResources

pmNackReceived

The number of occasions when Negative Acknowledgement (NACK) is received

Data Source

NodeB

Source Field

pmNackReceived

Source Section

HsDschResources

pmNoActiveSubFrames

The sum of active 2 ms subframes

Data Source

NodeB

Source Field

pmNoActiveSubFrames

Source Section

HsDschResources

pmNoActSubFrmsSpi00

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi00

Source Section

HsDschResources

pmNoActSubFrmsSpi01

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi01

Source Section

HsDschResources

pmNoActSubFrmsSpi02

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi02

Source Section

HsDschResources

pmNoActSubFrmsSpi03

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2

ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi03

Source Section

HsDschResources

pmNoActSubFrmsSpi04

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi04

Source Section

HsDschResources

pmNoActSubFrmsSpi05

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi05

Source Section

HsDschResources

pmNoActSubFrmsSpi06

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi06

Source Section

HsDschResources

pmNoActSubFrmsSpi07

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi07

Source Section

HsDschResources

pmNoActSubFrmsSpi08

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi08

Source Section

HsDschResources

pmNoActSubFrmsSpi09

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi09

Source Section

HsDschResources

pmNoActSubFrmsSpi10

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi10

Source Section

HsDschResources

pmNoActSubFrmsSpi11

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi11

Source Section

HsDschResources

pmNoActSubFrmsSpi12

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi12

Source Section

HsDschResources

pmNoActSubFrmsSpi13

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi13

Source Section

HsDschResources

pmNoActSubFrmsSpi14

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi14

Source Section

HsDschResources

pmNoActSubFrmsSpi15

The number of subframes containing high-speed data transmitted by the RBS. The counter is per cell and per subframe, meaning increments with max 1 per subframe. A "subframe" is a 2 ms TTI for HS-DSCH. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoActiveSubFramesSpi15

Source Section

HsDschResources

pmNoInactiveRequiredSubFrames

The sum of 2 ms subframes

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFrames

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi00

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi00

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi01

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi01

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi02

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi02

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi03

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi03

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi04

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi04

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi05

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi05

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi06

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi06

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi07

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi07

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi08

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi08

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi09

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi09

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi10

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi10

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi11

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi11

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi12

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi12

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi13

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi13

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi14

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi14

Source Section

HsDschResources

pmNoInactReqSubFrmsSpi15

The number of empty subframes transmitted even though data is scheduled for priority queue. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmNoInactiveRequiredSubFramesSpi15

Source Section

HsDschResources

pmNoOfHsUsersPerTti_00

Average number of users scheduled in the cell at each 2 ms subframe. Number of samples equal to 0

Data Source

NodeB

Source Field

pmNoOfHsUsersPerTti

Source Section

HsDschResources

pmNoOfHsUsersPerTti_01

Average number of users scheduled in the cell at each 2 ms subframe. Number of samples equal to 1

Data Source

NodeB

Source Field

pmNoOfHsUsersPerTti

Source Section

HsDschResources

pmNoOfHsUsersPerTti_02

Average number of users scheduled in the cell at each 2 ms subframe. Number of samples equal to 2

Data Source

NodeB

Source Field

pmNoOfHsUsersPerTti

Source Section

HsDschResources

pmNoOfHsUsersPerTti_03

Average number of users scheduled in the cell at each 2 ms subframe. Number of samples equal to 3

Data Source

NodeB

Source Field

pmNoOfHsUsersPerTti

Source Section

HsDschResources

pmNoOfHsUsersPerTti_04

Average number of users scheduled in the cell at each 2 ms subframe. Number of samples equal to 4

Data Source

NodeB

Source Field

pmNoOfHsUsersPerTti

Source Section

HsDschResources

pmRemainingResourceCheck_00

Counter that records the reason why it is not possible to schedule another high-speed user for immediate traffic. Number of samples equal to [0] HS-SCCH code shortage

Data Source

NodeB

Source Field

pmRemainingResourceCheck

Source Section

HsDschResources

pmRemainingResourceCheck_01

Counter that records the reason why it is not possible to schedule another high-speed user for immediate traffic. Number of samples equal to [1] HS-PDSCH code shortage

Data Source

NodeB

Source Field

pmRemainingResourceCheck

Source Section

HsDschResources

pmRemainingResourceCheck_02

Counter that records the reason why it is not possible to schedule another high-speed user for immediate traffic. Number of samples equal to [2] HS-PDSCH power shortage

Data Source

NodeB

Source Field

pmRemainingResourceCheck

Source Section

HsDschResources

pmReportedCqi_0

The reported Channel Quality Indicator CQI in the range 0 to 1

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_1

The reported Channel Quality Indicator CQI in the range 1 to 2

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_10

The reported Channel Quality Indicator CQI in the range 10 to 11

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_11

The reported Channel Quality Indicator CQI in the range 11 to 12

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_12

The reported Channel Quality Indicator CQI in the range 12 to 13

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_13

The reported Channel Quality Indicator CQI in the range 13 to 14

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_14

The reported Channel Quality Indicator CQI in the range 14 to 15

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_15

The reported Channel Quality Indicator CQI in the range 15 to 16

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_16

The reported Channel Quality Indicator CQI in the range 16 to 17

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_17

The reported Channel Quality Indicator CQI in the range 17 to 18

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_18

The reported Channel Quality Indicator CQI in the range 18 to 19

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_19

The reported Channel Quality Indicator CQI in the range 19 to 20

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_2

The reported Channel Quality Indicator CQI in the range 2 to 3

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_20

The reported Channel Quality Indicator CQI in the range 20 to 21

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_21

The reported Channel Quality Indicator CQI in the range 21 to 22

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_22

The reported Channel Quality Indicator CQI in the range 22 to 23

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_23

The reported Channel Quality Indicator CQI in the range 23 to 24

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_24

The reported Channel Quality Indicator CQI in the range 24 to 25

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_25

The reported Channel Quality Indicator CQI in the range 25 to 26

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_26

The reported Channel Quality Indicator CQI in the range 26 to 27

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_27

The reported Channel Quality Indicator CQI in the range 27 to 28

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_28

The reported Channel Quality Indicator CQI in the range 28 to 29

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_29

The reported Channel Quality Indicator CQI in the range 29 to 30

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_3

The reported Channel Quality Indicator CQI in the range 3 to 4

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_30

The reported Channel Quality Indicator CQI in the range 30 to 31

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_31

The reported Channel Quality Indicator CQI in the range 31 and upwards- number of samples with invalid CQI values

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_4

The reported Channel Quality Indicator CQI in the range 4 to 5

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_5

The reported Channel Quality Indicator CQI in the range 5 to 6

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_6

The reported Channel Quality Indicator CQI in the range 6 to 7

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_7

The reported Channel Quality Indicator CQI in the range 7 to 8

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_8

The reported Channel Quality Indicator CQI in the range 8 to 9

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmReportedCqi_9

The reported Channel Quality Indicator CQI in the range 9 to 10

Data Source

NodeB

Source Field

pmReportedCqi

Source Section

HsDschResources

pmSampleNumHsPdschCodesAdded

Counter that is increased every time the RBS dynamic code addition algorithm is executed.

Data Source

NodeB

Source Field

pmSampleNumHsPdschCodesAdded

Source Section

HsDschResources

pmSumAackedBits

The number of kbits transmitted at Media Access Control high-speed (MAC-hs) and acknowledged by the User Equipment (UE).

Data Source

NodeB

Source Field

pmSumAackedBits

Source Section

HsDschResources

pmSumAackedBitsSpi00

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAackedBitsSpi00

Source Section

HsDschResources

pmSumAackedBitsSpi01

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAackedBitsSpi01

Source Section

HsDschResources

pmSumAckedBitsSpi02

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi02

Source Section

HsDschResources

pmSumAckedBitsSpi03

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi03

Source Section

HsDschResources

pmSumAckedBitsSpi04

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi04

Source Section

HsDschResources

pmSumAckedBitsSpi05

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi05

Source Section

HsDschResources

pmSumAckedBitsSpi06

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi06

Source Section

HsDschResources

pmSumAckedBitsSpi07

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi07

Source Section

HsDschResources

pmSumAckedBitsSpi08

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi08

Source Section

HsDschResources

pmSumAckedBitsSpi09

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi09

Source Section

HsDschResources

pmSumAckedBitsSpi10

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi10

Source Section

HsDschResources

pmSumAckedBitsSpi11

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi11

Source Section

HsDschResources

pmSumAckedBitsSpi12

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi12

Source Section

HsDschResources

pmSumAckedBitsSpi13

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi13

Source Section

HsDschResources

pmSumAckedBitsSpi14

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi14

Source Section

HsDschResources

pmSumAckedBitsSpi15

The number of MAC-hs bits received and acknowledged by the User Equipment (UE). Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumAckedBitsSpi15

Source Section

HsDschResources

pmSumDelaySpi00

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi00

Source Section

HsDschResources

pmSumDelaySpi01

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi01

Source Section

HsDschResources

pmSumDelaySpi02

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI.

The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi02

Source Section

HsDschResources

pmSumDelaySpi03

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi03

Source Section

HsDschResources

pmSumDelaySpi04

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi04

Source Section

HsDschResources

pmSumDelaySpi05

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi05

Source Section

HsDschResources

pmSumDelaySpi06

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi06

Source Section

HsDschResources

pmSumDelaySpi07

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi07

Source Section

HsDschResources

pmSumDelaySpi08

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi08

Source Section

HsDschResources

pmSumDelaySpi09

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi09

Source Section

HsDschResources

pmSumDelaySpi10

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi10

Source Section

HsDschResources

pmSumDelaySpi11

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi11

Source Section

HsDschResources

pmSumDelaySpi12

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi12

Source Section

HsDschResources

pmSumDelaySpi13

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi13

Source Section

HsDschResources

pmSumDelaySpi14

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi14

Source Section

HsDschResources

pmSumDelaySpi15

Measurements to observe the sum of the delay of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. Each counter observes a specific SPI.

The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumDelaySpi15

Source Section

HsDschResources

pmSumJitterSpi00

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi00

Source Section

HsDschResources

pmSumJitterSpi01

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi01

Source Section

HsDschResources

pmSumJitterSpi02

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi02

Source Section

HsDschResources

pmSumJitterSpi03

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi03

Source Section

HsDschResources

pmSumJitterSpi04

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific

SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi04

Source Section

HsDschResources

pmSumJitterSpi05

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi05

Source Section

HsDschResources

pmSumJitterSpi06

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi06

Source Section

HsDschResources

pmSumJitterSpi07

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi07

Source Section

HsDschResources

pmSumJitterSpi08

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi08

Source Section

HsDschResources

pmSumJitterSpi09

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific

SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi09

Source Section

HsDschResources

pmSumJitterSpi10

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi10

Source Section

HsDschResources

pmSumJitterSpi11

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi11

Source Section

HsDschResources

pmSumJitterSpi12

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi12

Source Section

HsDschResources

pmSumJitterSpi13

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi13

Source Section

HsDschResources

pmSumJitterSpi14

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific

SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi14

Source Section

HsDschResources

pmSumJitterSpi15

Measurements to observe the sum of the delay jitter of the transmitted data for scheduling priority class 00-15 during a ROP period before it is scheduled. The jitter delay is defined as a time difference between current delay and the previous one. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumJitterSpi15

Source Section

HsDschResources

pmSumNonEmptyUserBuffers

The number of user buffers with data in the buffer.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffers

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi00

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi00

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi01

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi01

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi02

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi02

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi03

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi03

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi04

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi04

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi05

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different

flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi05

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi06

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi06

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi07

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi07

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi08

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi08

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi09

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi09

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi10

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi10

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi11

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi11

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi12

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi12

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi13

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi13

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi14

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi14

Source Section

HsDschResources

pmSumNonEmUsrBuffSpi15

Measurements to observe the number of user buffers for scheduling priority class 00-15 with data in the buffer for each 2 ms subframes. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNonEmptyUserBuffersSpi15

Source Section

HsDschResources

pmSumNoOfUsersSpi00

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi00

Source Section

HsDschResources

pmSumNoOfUsersSpi01

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi01

Source Section

HsDschResources

pmSumNoOfUsersSpi02

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific

SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi02

Source Section

HsDschResources

pmSumNoOfUsersSpi03

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi03

Source Section

HsDschResources

pmSumNoOfUsersSpi04

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi04

Source Section

HsDschResources

pmSumNoOfUsersSpi05

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi05

Source Section

HsDschResources

pmSumNoOfUsersSpi06

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi06

Source Section

HsDschResources

pmSumNoOfUsersSpi07

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi07

Source Section

HsDschResources

pmSumNoOfUsersSpi08

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi08

Source Section

HsDschResources

pmSumNoOfUsersSpi09

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi09

Source Section

HsDschResources

pmSumNoOfUsersSpi10

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi10

Source Section

HsDschResources

pmSumNoOfUsersSpi11

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi11

Source Section

HsDschResources

pmSumNoOfUsersSpi12

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi12

Source Section

HsDschResources

pmSumNoOfUsersSpi13

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi13

Source Section

HsDschResources

pmSumNoOfUsersSpi14

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi14

Source Section

HsDschResources

pmSumNoOfUsersSpi15

Generic counters to observe the total number of users for scheduling priority class 00-15 selected for each 2 ms subframe that is transmitted in the cell. Each counter observes a specific

SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumNoOfUsersSpi15

Source Section

HsDschResources

pmSumNumHsPdschCodesAdded

Counter for the sum of all codes that are allocated for HS-DSCH (RNC allocation + codes allocated by the RBS dynamic HS-PDSCH code addition algorithm). The measure is taken after limitations due to hardware is enforced.

Data Source

NodeB

Source Field

pmSumNumHsPdschCodesAdded

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_00

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range < 0dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_01

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 0..0.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_02

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 0.5..1dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_03

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 1..1.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_04

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 1.5..2dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_05

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 2..2.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_06

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 2.5..3dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_07

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 3..3.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_08

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 3.5..4dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_09

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 4..4.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_10

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 4.5..5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_100

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 49.5..50dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_101

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 50..50.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_102

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 50.5..MAX_VALUE dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_11

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 5..5.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_12

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 5.5..6dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_13

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 6..6.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_14

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 6.5..7dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_15

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 7..7.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_16

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 7.5..8dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_17

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 8..8.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_18

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 8.5..9dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_19

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 9..9.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_20

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 9.5..10dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_21

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 10..10.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_22

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 10.5..11dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_23

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 11..11.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_24

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 11.5..12dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_25

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 12..12.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_26

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 12.5..13dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_27

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 13..13.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_28

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 13.5..14dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_29

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 14..14.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_30

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 14.5..15dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_31

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 15..15.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_32

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 15.5..16dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_33

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 16..16.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_34

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 16.5..17dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_35

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 17..17.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_36

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 17.5..18dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_37

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 18..18.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_38

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 18.5..19dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_39

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 19..19.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_40

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 19.5..20dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_41

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 20..20.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_42

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 20.5..21dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_43

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 21..21.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_44

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 21.5..22dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_45

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 22..22.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_46

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 22.5..23dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_47

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 23..23.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_48

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 23.5..24dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_49

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 24..24.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_50

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 24.5..25dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_51

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 25..25.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_52

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 25.5..26dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_53

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 26..26.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_54

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 26.5..27dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_55

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 27..27.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_56

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 27.5..28dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_57

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 28..28.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_58

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 28.5..29dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_59

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 29..29.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_60

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 29.5..30dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_61

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 30..30.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_62

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 30.5..31dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_63

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 31..31.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_64

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 31.5..32dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_65

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 32..32.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_66

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 32.5..33dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_67

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 33..33.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_68

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 33.5..34dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_69

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 34..34.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_70

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 34.5..35dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_71

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 35..35.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_72

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 35.5..36dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_73

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 36..36.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_74

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 36.5..37dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_75

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 37..37.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_76

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 37.5..38dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_77

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 38..38.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_78

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 38.5..39dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_79

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 39..39.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_80

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 39.5..40dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_81

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 40..40.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_82

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 40.5..41dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_83

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 41..41.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_84

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 41.5..42dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_85

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 42..42.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_86

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 42.5..43dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_87

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 43..43.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_88

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 43.5..44dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_89

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 44..44.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_90

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 44.5..45dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_91

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 45..45.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_92

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 45.5..46dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_93

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 46..46.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_94

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 46.5..47dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_95

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 47..47.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_96

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 47.5..48dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_97

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 48..48.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_98

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 48.5..49dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumOfHsScchUsedPwr_99

HS-SCCH transmitted power per cell. In case more than one HS-SCCH code is used, the registered value is the sum of each individual value. Number of samples in range 49..49.5dBm

Data Source

NodeB

Source Field

pmSumOfHsScchUsedPwr

Source Section

HsDschResources

pmSumTransmittedBits

The number of transmitted kbits at MAC-hs, level including retransmissions

Data Source

NodeB

Source Field

pmSumTransmittedBits

Source Section

HsDschResources

pmSumTransmittedBitsSpi00

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi00

Source Section

HsDschResources

pmSumTransmittedBitsSpi01

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi01

Source Section

HsDschResources

pmSumTransmittedBitsSpi02

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi02

Source Section

HsDschResources

pmSumTransmittedBitsSpi03

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi03

Source Section

HsDschResources

pmSumTransmittedBitsSpi04

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi04

Source Section

HsDschResources

pmSumTransmittedBitsSpi05

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi05

Source Section

HsDschResources

pmSumTransmittedBitsSpi06

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi06

Source Section

HsDschResources

pmSumTransmittedBitsSpi07

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi07

Source Section

HsDschResources

pmSumTransmittedBitsSpi08

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi08

Source Section

HsDschResources

pmSumTransmittedBitsSpi09

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi09

Source Section

HsDschResources

pmSumTransmittedBitsSpi10

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi10

Source Section

HsDschResources

pmSumTransmittedBitsSpi11

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi11

Source Section

HsDschResources

pmSumTransmittedBitsSpi12

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi12

Source Section

HsDschResources

pmSumTransmittedBitsSpi13

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi13

Source Section

HsDschResources

pmSumTransmittedBitsSpi14

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi14

Source Section

HsDschResources

pmSumTransmittedBitsSpi15

Measurements to observe the total amount of data sent on MAC-hs level per scheduling priority class 00-15. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmSumTransmittedBitsSpi15

Source Section

HsDschResources

pmTransmCarrierPowerNonHsP5MD_00

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range < 25 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmCarrierPowerNonHsP5MD_51

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range > 50 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_01

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_02

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_03

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_04

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_05

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_06

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_07

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_08

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_09

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_10

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_11

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_12

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_13

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_14

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_15

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_16

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_17

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_18

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_19

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_20

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_21

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_22

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_23

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_24

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_25

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_26

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_27

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_28

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_29

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_30

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_31

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_32

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_33

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_34

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_35

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_36

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_37

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_38

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_39

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_40

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_41

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_42

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_43

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_44

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_45

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_46

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_47

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_48

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_49

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_50

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_51

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerHs_52

Measurement to observe the distribution of transmitted carrier power for all codes used for transmission of HSDPA channels including HS-PDSCH, HS-SCCH, E-AGCH, E-RGCH and E-HICH.

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_000

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range less than 0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_001

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 0.0 - 0.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_002

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 0.5 - 1.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_003

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 1.0 - 1.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_004

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 1.5 - 2.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_005

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 2.0 - 2.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_006

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 2.5 - 3.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_007

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 3.0 - 3.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_008

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 3.5 - 4.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_009

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 4.0 - 4.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_010

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 4.5 - 5.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_011

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 5.0 - 5.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_012

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 5.5 - 6.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_013

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 6.0 - 6.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_014

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 6.5 - 7.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_015

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 7.0 - 7.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_016

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 7.5 - 8.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_017

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 8.0 - 8.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_018

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 8.5 - 9.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_019

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 9.0 - 9.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_020

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 9.5 - 10.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_021

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 10.0 - 10.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_022

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 10.5 - 11.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_023

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 11.0 - 11.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_024

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 11.5 - 12.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_025

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 12.0 - 12.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_026

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 12.5 - 13.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_027

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 13.0 - 13.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_028

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 13.5 - 14.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_029

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 14.0 - 14.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_030

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 14.5 - 15.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_031

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 15.0 - 15.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_032

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 15.5 - 16.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_033

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 16.0 - 16.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_034

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 16.5 - 17.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_035

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 17.0 - 17.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_036

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 17.5 - 18.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_037

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 18.0 - 18.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_038

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 18.5 - 19.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_039

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 19.0 - 19.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_040

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 19.5 - 20.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_041

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 20.0 - 20.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_042

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 20.5 - 21.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_043

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 21.0 - 21.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_044

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 21.5 - 22.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_045

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 22.0 - 22.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_046

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 22.5 - 23.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_047

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 23.0 - 23.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_048

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 23.5 - 24.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_049

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 24.0 - 24.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_050

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 24.5 - 25.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_051

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 25.0 - 25.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_052

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 25.5 - 26.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_053

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 26.0 - 26.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_054

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 26.5 - 27.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_055

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 27.0 - 27.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_056

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 27.5 - 28.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_057

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 28.0 - 28.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_058

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 28.5 - 29.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_059

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 29.0 - 29.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_060

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 29.5 - 30.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_061

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 30.0 - 30.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_062

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 30.5 - 31.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_063

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 31.0 - 31.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_064

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 31.5 - 32.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_065

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 32.0 - 32.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_066

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 32.5 - 33.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_067

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 33.0 - 33.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_068

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 33.5 - 34.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_069

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 34.0 - 34.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_070

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 34.5 - 35.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_071

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 35.0 - 35.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_072

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 35.5 - 36.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_073

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 36.0 - 36.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_074

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 36.5 - 37.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_075

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 37.0 - 37.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_076

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 37.5 - 38.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_077

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 38.0 - 38.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_078

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 38.5 - 39.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_079

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 39.0 - 39.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_080

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 39.5 - 40.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_081

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 40.0 - 40.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_082

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 40.5 - 41.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_083

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 41.0 - 41.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_084

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 41.5 - 42.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_085

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 42.0 - 42.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_086

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 42.5 - 43.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_087

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 43.0 - 43.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_088

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 43.5 - 44.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_089

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 44.0 - 44.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_090

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 44.5 - 45.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_091

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 45.0 - 45.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_092

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 45.5 - 46.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_093

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 46.0 - 46.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_094

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 46.5 - 47.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_095

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 47.0 - 47.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_096

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 47.5 - 48.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_097

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 48.0 - 48.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_098

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 48.5 - 49.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_099

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 49.0 - 49.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_100

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 49.5 - 50.0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_101

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission equal or greater than 50.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTransmittedCarrierPowerNonHs_102

(Retired on Utran P6)The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 50.0 - 50.5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_00

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range <0 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_01

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 0..1 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_02

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 1..2 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_03

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 2..3 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_04

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 3..4 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_05

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 4..5 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_06

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 5..6 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_07

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 6..7 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_08

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 7..8 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_09

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 8..9 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_10

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 9..10 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_11

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 10..11 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_12

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 11..12 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_13

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 12..13 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_14

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 13..14 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_15

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 14..15 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_16

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 15..16 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_17

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 16..17 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_18

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 17..18 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_19

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 18..19 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_20

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 19..20 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_21

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 20..21 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_22

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 21..22 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_23

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 22..23 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_24

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 23..24 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_25

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 24..25 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_26

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 25..26 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_27

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 26..27 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_28

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 27..28 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_29

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 28..29 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_30

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 29..30 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_31

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 30..31 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_32

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 31..32 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_33

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 32..33 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_34

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 33..34 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_35

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 34..35 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_36

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 35..36 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_37

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 36..37 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_38

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 37..38 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_39

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 38..39 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_40

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 39..40 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_41

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 40..41 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_42

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 41..42 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_43

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 42..43 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_44

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 43..44 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_45

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 44..45 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_46

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 45..46 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_47

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 46..47 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_48

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 47..48 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_49

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 48..49 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_50

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range 49..50 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmTxCarrierPowerNonHsP6_51

The distribution of transmitted carrier power for all codes not used for High-Speed Physical Downlink Shared Channel (HS-PDSCH) or HS-SCCH transmission in the range >50 dBm

Data Source

NodeB

Source Field

pmTransmittedCarrierPowerNonHs

Source Section

HsDschResources

pmUsedCqi_0

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 0 to 1

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_1

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 1 to 2

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_10

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 10 to 11

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_11

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 11 to 12

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_12

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 12 to 13

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_13

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 13 to 14

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_14

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 14 to 15

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_15

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 15 to 16

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_16

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 16 to 17

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_17

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 17 to 18

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_18

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 18 to 19

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_19

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 19 to 20

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_2

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 2 to 3

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_20

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 20 to 21

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_21

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 21 to 22

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_22

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 22 to 23

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_23

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 23 to 24

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_24

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 24 to 25

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_25

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 25 to 26

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_26

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 26 to 27

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_27

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 27 to 28

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_28

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 28 to 29

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_29

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 29 to 30

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_3

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 3 to 4

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_30

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 30 to 31

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_4

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 4 to 5

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_5

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 5 to 6

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_6

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 6 to 7

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_7

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 7 to 8

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_8

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 8 to 9

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedCqi_9

The adjusted CQI, which is used to calculate the transport format when the user is transmitting on the high-speed-DSCH in the range 9 to 10

Data Source

NodeB

Source Field

pmUsedCqi

Source Section

HsDschResources

pmUsedTbs16Qam_01

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_02

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_03

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_04

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_05

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_06

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_07

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_08

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_09

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_10

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_11

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_12

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_13

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_14

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_15

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_16

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_17

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_18

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_19

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_20

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_21

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_22

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_23

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_24

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_25

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_26

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_27

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_28

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_29

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block (MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbs16Qam_30

Counting the number of used transport block size with 16QAM. A transport block is a HARQ data block (MAC-hs) Power Distribution Unit (PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbs16Qam

Source Section

HsDschResources

pmUsedTbsQpsk_01

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_02

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_03

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_04

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_05

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_06

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_07

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_08

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_09

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_10

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_11

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_12

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_13

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_14

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_15

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_16

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_17

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_18

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_19

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_20

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_21

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_22

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_23

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_24

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_25

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_26

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_27

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_28

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_29

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

pmUsedTbsQpsk_30

Number of used transport block size with QPSK. A transport block is a HARQ data block (MAC-hs PDU). The number of HARQ transmissions and retransmissions on the MAC-hs layer are counted.

Data Source

NodeB

Source Field

pmUsedTbsQpsk

Source Section

HsDschResources

ImaGroup_NodeB Primitive Calculations

The following is a list of primitive calculations for the ImaGroup_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

ImaGroup_NodeB Peg Counts

The following is a list of peg counts for the ImaGroup_NodeB entity.

pmGrFc

The total number of local end group failure condition entrances.

Data Source

NodeB_RXI

Source Field

pmGrFc

Source Section

ImaGroup

pmGrFcFe

The total number of far end group failure condition entrances.

Data Source

NodeB_RXI

Source Field

pmGrFcFe

Source Section

ImaGroup

pmGrUasIma

The total number of one second intervals, where the Group Traffic State Machine (GTSM) is down.

Data Source

NodeB_RXI

Source Field

pmGrUasIma

Source Section

ImaGroup

ImaGroup_RNC Primitive Calculations

The following is a list of primitive calculations for the ImaGroup_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ImaGroup_RNC Peg Counts

The following is a list of peg counts for the ImaGroup_RNC entity.

pmGrFc

The total number of local end group failure condition entrances.

Data Source

RNC_RXI

Source Field

pmGrFc

Source Section

ImaGroup

pmGrFcFe

The total number of far end group failure condition entrances.

Data Source

RNC_RXI

Source Field

pmGrFcFe

Source Section

ImaGroup

pmGrUasIma

The total number of one second intervals, where the Group Traffic State Machine (GTSM) is down.

Data Source

RNC_RXI

Source Field

pmGrUasIma

Source Section

ImaGroup

ImaLink_NodeB Primitive Calculations

The following is a list of primitive calculations for the ImaLink_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ImaLink_NodeB Peg Counts

The following is a list of peg counts for the ImaLink_NodeB entity.

pmIvIma

The total number of IMA Control Protocol (ICP) Violations.

Data Source

NodeB_RXI

Source Field

pmIvIma

Source Section

ImaLink

pmOifIma

The total number of Out of IMA Frame (OIF) anomalies.

Data Source

NodeB_RXI

Source Field

pmOifIma

Source Section

ImaLink

pmRxFc

The total number of local end Rx link failures.

Data Source

NodeB_RXI

Source Field

pmRxFc

Source Section

ImaLink

pmRxFcFe

The total number of far end Rx link failures.

Data Source

NodeB_RXI

Source Field

pmRxFcFe

Source Section

ImaLink

pmRxStuffIma

The total number of stuff events inserted in the receive direction, except during SES-IMA or UAS-IMA conditions.

Data Source

NodeB_RXI

Source Field

pmRxStuffIma

Source Section

ImaLink

pmRxUusIma

The total number of Rx Unusable Seconds.

Data Source

NodeB_RXI

Source Field

pmRxUusIma

Source Section

ImaLink

pmRxUusImaFe

The total number of Rx Unusable Seconds indications from the Rx far end LSM.

Data Source

NodeB_RXI

Source Field

pmRxUusImaFe

Source Section

ImaLink

pmSesIma

The total number of one second intervals containing 30% of the ICP cells counted as IV-IMAs or one or more link defects, Loss of IMA Frame (LIF) or Link Out of Delay Synchronization (LODS) defects, except during UAS-IMA conditions.

Data Source

NodeB_RXI

Source Field

pmSesIma

Source Section

ImaLink

pmSesImaFe

The total number of one second intervals containing one or more Remote Defect Indicator for IMA (RDI-IMA) defects, except during Unavailable Seconds for IMA at far end (UAS-IMA-FE) conditions.

Data Source

NodeB_RXI

Source Field

pmSesImaFe

Source Section

ImaLink

pmTxFc

The total number of local end Tx link failures.

Data Source

NodeB_RXI

Source Field

pmTxFc

Source Section

ImaLink

pmTxFcFe

The total number of far end Tx link failures.

Data Source

NodeB_RXI

Source Field

pmTxFcFe

Source Section

ImaLink

pmTxStuffIma

The total number of stuff events inserted in the transmit direction.

Data Source

NodeB_RXI

Source Field

pmTxStuffIma

Source Section

ImaLink

pmTxUusIma

The total number of Tx Unusable Seconds .

Data Source

NodeB_RXI

Source Field

pmTxUusIma

Source Section

ImaLink

pmTxUusImaFe

The total number of Tx Unusuable Second indications from the Tx far end LSM.

Data Source

NodeB_RXI

Source Field

pmTxUusImaFe

Source Section

ImaLink

pmUasIma

The total number of Unavailable Seconds at local end.

Data Source

NodeB_RXI

Source Field

pmUasIma

Source Section

ImaLink

pmUasImaFe

The total number of Unavailable Seconds at far end.

Data Source

NodeB_RXI

Source Field

pmUasImaFe

Source Section

ImaLink

ImaLink_RNC Primitive Calculations

The following is a list of primitive calculations for the ImaLink_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

ImaLink_RNC Peg Counts

The following is a list of peg counts for the ImaLink_RNC entity.

pmIvIma

The total number of IMA Control Protocol (ICP) Violations.

Data Source

RNC_RXI

Source Field

pmIvIma

Source Section

ImaLink

pmOifIma

The total number of Out of IMA Frame (OIF) anomalies.

Data Source

RNC_RXI

Source Field

pmOifIma

Source Section

ImaLink

pmRxFc

The total number of local end Rx link failures.

Data Source

RNC_RXI

Source Field

pmRxFc

Source Section

ImaLink

pmRxFcFe

The total number of far end Rx link failures.

Data Source

RNC_RXI

Source Field

pmRxFcFe

Source Section

ImaLink

pmRxStuffIma

The total number of stuff events inserted in the receive direction, except during SES-IMA or UAS-IMA conditions.

Data Source

RNC_RXI

Source Field

pmRxStuffIma

Source Section

ImaLink

pmRxUusIma

The total number of Rx Unusable Seconds.

Data Source

RNC_RXI

Source Field

pmRxUusIma

Source Section

ImaLink

pmRxUusImaFe

The total number of Rx Unusable Seconds indications from the Rx far end LSM.

Data Source

RNC_RXI

Source Field

pmRxUusImaFe

Source Section

ImaLink

pmSesIma

The total number of one second intervals containing 30% of the ICP cells counted as IV-IMAs or one or more link defects, Loss of IMA Frame (LIF) or Link Out of Delay Synchronization (LODS) defects, except during UAS-IMA conditions.

Data Source

RNC_RXI

Source Field

pmSesIma

Source Section

ImaLink

pmSesImaFe

The total number of one second intervals containing one or more Remote Defect Indicator for IMA (RDI-IMA) defects, except during Unavailable Seconds for IMA at far end (UAS-IMA-FE) conditions.

Data Source

RNC_RXI

Source Field

pmSesImaFe

Source Section

ImaLink

pmTxFc

The total number of local end Tx link failures.

Data Source

RNC_RXI

Source Field

pmTxFc

Source Section

ImaLink

pmTxFcFe

The total number of far end Tx link failures.

Data Source

RNC_RXI

Source Field

pmTxFcFe

Source Section

ImaLink

pmTxStuffIma

The total number of stuff events inserted in the transmit direction.

Data Source

RNC_RXI

Source Field

pmTxStuffIma

Source Section

ImaLink

pmTxUusIma

The total number of Tx Unusable Seconds .

Data Source

RNC_RXI

Source Field

pmTxUusIma

Source Section

ImaLink

pmTxUusImaFe

The total number of Tx Unusable Second indications from the Tx far end LSM.

Data Source

RNC_RXI

Source Field

pmTxUusImaFe

Source Section

ImaLink

pmUasIma

The total number of Unavailable Seconds at local end.

Data Source

RNC_RXI

Source Field

pmUasIma

Source Section

ImaLink

pmUasImaFe

The total number of Unavailable Seconds at far end.

Data Source

RNC_RXI

Source Field

pmUasImaFe

Source Section

ImaLink

ImBasicMessage Primitive Calculations

The following is a list of primitive calculations for the ImBasicMessage entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_IM_basic_message_success

IM basic message success rate Healthy value:99 - 100%

Calculation

$$(\text{pmCallAttempts} / (\text{vsum}(\text{pmCallAttempts} , \text{pmFailedCallAttempts}))) * 100.0$$

ImBasicMessage Peg Counts

The following is a list of peg counts for the ImBasicMessage entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ImBasicMessage_Gen

pmCallAttempts

The total number of successful invocations of this message.

Data Source

RNC_RXI

Source Field

pmCallAttempts

Source Section

ImBasicMessage

pmFailedCallAttempts

The total number of unsuccessful invocations of this message.

Data Source

RNC_RXI

Source Field

pmFailedCallAttempts

Source Section

ImBasicMessage

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

ImBasicMessage_Gen

ImDeviceService Primitive Calculations

The following is a list of primitive calculations for the ImDeviceService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

100.0 * vsum(pmTotalSeizures, -1 * pmUnsuccSeizures) / pmTotalSeizures

ImDeviceService Peg Counts

The following is a list of peg counts for the ImDeviceService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ImDeviceService_Gen

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

ImMessageComposition Primitive Calculations

The following is a list of primitive calculations for the ImMessageComposition entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_IM_basic_message_success

IM basic message success rate Healthy value:99 - 100%

Calculation

$$(\text{pmCallAttempts} / (\text{vsum}(\text{pmCallAttempts}, \text{pmFailedCallAttempts}))) * 100.0$$

ImMessageComposition Peg Counts

The following is a list of peg counts for the ImMessageComposition entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ImMessageComposition_Gen

pmCallAttempts

The total number of successful invocations of this message.

Data Source

RNC_RXI

Source Field

pmCallAttempts

Source Section

ImMessageComposition

pmFailedCallAttempts

The total number of unsuccessful invocations of this message.

Data Source

RNC_RXI

Source Field

pmFailedCallAttempts

Source Section

ImMessageComposition

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

ImService Primitive Calculations

The following is a list of primitive calculations for the ImService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$$

ImService Peg Counts

The following is a list of peg counts for the ImService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ImService_Gen

pmForcedRelease

The total number of forced device releases.

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

ImService

pmNormalRelease

The total number of normal device releases.

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

ImService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

ImService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

ImService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

ImVariableMessage Primitive Calculations

The following is a list of primitive calculations for the ImVariableMessage entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

IM_basic_message_success_%

IM basic message success rate Healthy value:99 - 100%

Calculation

$$(\text{pmCallAttempts} / (\text{vsum}(\text{pmCallAttempts}, \text{pmFailedCallAttempts}))) * 100.0$$

NUMDAYS

of days in Report

Calculation

DAYSINREPORT()

NUMHOURS

of hours in Summation Data

Calculation

p_IM_basic_message_success

IM basic message success rate Healthy value:99 - 100%

Calculation

$$(\text{pmCallAttempts} / (\text{vsum}(\text{pmCallAttempts}, \text{pmFailedCallAttempts}))) * 100.0$$

ImVariableMessage Peg Counts

The following is a list of peg counts for the ImVariableMessage entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ImVariableMessage_Gen

pmCallAttempts

The total number of successful invocations of this message.

Data Source

RNC_RXI

Source Field

pmCallAttempts

Source Section

ImVariableMessage

pmFailedCallAttempts

The total number of unsuccessful invocations of this message.

Data Source

RNC

Source Field

pmFailedCallAttempts

Source Section

ImVariableMessage

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

InmarsatDeviceService Primitive Calculations

The following is a list of primitive calculations for the InmarsatDeviceService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentage of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

InmarsatDeviceService Peg Counts

The following is a list of peg counts for the InmarsatDeviceService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

InmarsatDeviceService_Gen

pmForcedRelease

The total number of forced device releases.

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

InmarsatDeviceService

pmNormalRelease

The total number of normal device releases.

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

InmarsatDeviceService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

InmarsatDeviceService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

InmarsatDeviceService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

IP_NodeB Primitive Calculations

The following is a list of primitive calculations for the IP_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IP_NodeB Peg Counts

The following is a list of peg counts for the IP_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Ip_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ip_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ip_NodeB_WMGeneral

pmNoOfHdrErrors

Number of datagrams discarded due to format error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfHdrErrors

Source Section

Ip_NodeB

pmNoOfIpAddrErrors

Number of datagrams discarded due to misdelivery.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpAddrErrors

Source Section

Ip_NodeB

pmNoOfIpFlowDatagrams

Number of datagrams forwarded.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpFlowDatagrams

Source Section

Ip_NodeB

pmNoOfIpInDiscards

Number of datagrams discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpInDiscards

Source Section

Ip_NodeB

pmNoOfIpInReceives

Total number of datagrams received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpInReceives

Source Section

Ip_NodeB

pmNoOfIpOutDiscards

Number of datagrams discarded due to lack of resources.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpOutDiscards

Source Section

Ip_NodeB

pmNoOfIpReasmOKs

Number of datagrams successfully reassembled.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpReasmOKs

Source Section

Ip_NodeB

pmNoOfIpReasmReqds

Number of fragments received needing reassembly.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpReasmReqds

Source Section

Ip_NodeB

IP_RNC Primitive Calculations

The following is a list of primitive calculations for the IP_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IP_RNC Peg Counts

The following is a list of peg counts for the IP_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ip_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ip_RNC_WMGeneral

pmNoOfHdrErrors

Number of datagrams discarded due to format error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfHdrErrors

Source Section

Ip_RNC

pmNoOfIpAddrErrors

Number of datagrams discarded due to misdelivery.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpAddrErrors

Source Section

Ip_RNC

pmNoOfIpFlowDatagrams

Number of datagrams forwarded.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpFlowDatagrams

Source Section

Ip_RNC

pmNoOfIpInDiscards

Number of datagrams discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpInDiscards

Source Section

Ip_RNC

pmNoOfIpInReceives

Total number of datagrams received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpInReceives

Source Section

Ip_RNC

pmNoOfIpOutDiscards

Number of datagrams discarded due to lack of resources.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpOutDiscards

Source Section

Ip_RNC

pmNoOfIpReasmOKs

Number of datagrams successfully reassembled.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpReasmOKs

Source Section

Ip_RNC

pmNoOfIpReasmReqds

Number of fragments received needing reassembly.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIpReasmReqds

Source Section

Ip_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Ip_RNC

IpAccessHostGpb_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostGpb_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Ratio_of_discarded_received_IP_datagrams

The ratio of discarded received IP datagrams (in %) Healthy value: 0-1 %

Calculation

$(\text{pmIpInDiscards} / \text{pmIpInReceives}) * 100.0$

p_Ratio_of_discarded_sent_IP_datagrams

The ratio of discarded sent IP datagrams (in %) Healthy value: 0-1 %

Calculation

$(\text{pmIpOutDiscards} / \text{pmIpOutRequests}) * 100.0$

Sent_IP_datagrams

The total number of sent IP datagrams

Calculation

$\text{pmIpOutRequests} - \text{pmIpOutDiscards}$

IpAccessHostGpb_NodeB Peg Counts

The following is a list of peg counts for the IpAccessHostGpb_NodeB entity.

pmIcmpInDestUnreachs

The total number of ICMP Destination Unreachable messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInDestUnreachs

Source Section

IpAccessHostGpb

pmIcmpInEchoReps

The total number of ICMP Echo Reply messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInEchoReps

Source Section

IpAccessHostGpb

pmIcmpInEchos

The total number of ICMP Echo (request) messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInEchos

Source Section

IpAccessHostGpb

pmIcmpInErrors

The total number of ICMP messages which the entity received but determined as having ICMP-specific errors.

Data Source

NodeB_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostGpb

pmIcmpInMsgs

The total number of ICMP messages which the entity received.

Data Source

NodeB_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostGpb

pmIcmpInParamProbs

The total number of ICMP Parameter Problem messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInParamProbs

Source Section

IpAccessHostGpb

pmIcmpInRedirects

The total number of ICMP Redirect messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInRedirects

Source Section

IpAccessHostGpb

pmIcmpInSrcQuenchs

The total number of ICMP Source Quench messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInSrcQuenchs

Source Section

IpAccessHostGpb

pmIcmpInTimeExcds

The total number of ICMP Time Exceeded messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInTimeExcds

Source Section

IpAccessHostGpb

pmIcmpOutDestUnreachs

The total number of ICMP Destination Unreachable messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostGpb

pmIcmpOutEchoReps

The total number of ICMP Echo Reply messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutEchoReps

Source Section

IpAccessHostGpb

pmIcmpOutEchos

The total number of ICMP Echo (request) messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutEchos

Source Section

IpAccessHostGpb

pmIcmpOutErrors

The total number of ICMP messages which this entity did not send due to problems discovered within ICMP such as a lack of buffers.

Data Source

NodeB_RXI

Source Field

pmIcmpOutErrors

Source Section

IpAccessHostGpb

pmIcmpOutMsgs

The total number of ICMP messages which this entity attempted to send.

Data Source

NodeB_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostGpb

pmIcmpOutParamProbs

The total number of ICMP Parameter Problem messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutParamProbs

Source Section

IpAccessHostGpb

pmIpFragCreates

The total number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

NodeB_RXI

Source Field

pmIpFragCreates

Source Section

IpAccessHostGpb

pmIpFragFails

The total number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be.

Data Source

NodeB_RXI

Source Field

pmIpFragFails

Source Section

IpAccessHostGpb

pmIpFragOKs

The total number of IP datagrams that have been successfully fragmented at this entity.

Data Source

NodeB_RXI

Source Field

pmIpFragOKs

Source Section

IpAccessHostGpb

pmIpInAddrErrors

The total number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity.

Data Source

NodeB_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostGpb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

Data Source

NodeB_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostGpb

pmIpInDiscards

The total number of input IP datagrams for which no problems were encountered to prevent their continued processing, but which were discarded.

Data Source

NodeB_RXI

Source Field

pmIpInDiscards

Source Section

IpAccessHostGpb

pmIpInHdrErrors

The total number of input datagrams discarded due to errors in their IP headers.

Data Source

NodeB_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostGpb

pmIpInReceives

The total number of input datagrams received from interfaces.

Data Source

NodeB_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostGpb

pmIpInUnknownProtos

The total number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

Data Source

NodeB_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostGpb

pmIpOutDiscards

The total number of output IP datagrams for which no problem was encountered to prevent their transmission to their destination, but which were discarded (for example, for lack of buffer space).

Data Source

NodeB_RXI

Source Field

pmIpOutDiscards

Source Section

IpAccessHostGpb

pmIpOutRequests

The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.

Data Source

NodeB_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostGpb

pmIpReasmFails

The total number of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc).

Data Source

NodeB_RXI

Source Field

pmIpReasmFails

Source Section

IpAccessHostGpb

pmIpReasmOKs

The total number of IP datagrams successfully re-assembled.

Data Source

NodeB_RXI

Source Field

pmIpReasmOKs

Source Section

IpAccessHostGpb

pmIpReasmReqds

The total number of IP fragments received which needed to be reassembled at this entity.

Data Source

NodeB_RXI

Source Field

pmIpReasmReqds

Source Section

IpAccessHostGpb

IpAccessHostGpb_RNC Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostGpb_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Ratio_of_discarded_received_IP_datagrams

The ratio of discarded received IP datagrams (in %) Healthy value: 0-1 %

Calculation

(pmIpInDiscards / pmIpInReceives) * 100.0

p_Ratio_of_discarded_sent_IP_datagrams

The ratio of discarded sent IP datagrams (in %) Healthy value: 0-1 %

Calculation

(pmIpOutDiscards / pmIpOutRequests) * 100.0

Sent_IP_datagrams

The total number of sent IP datagrams

Calculation

`pmIpOutRequests - pmIpOutDiscards`

IpAccessHostGpb_RNC Peg Counts

The following is a list of peg counts for the IpAccessHostGpb_RNC entity.

pmIcmpInDestUnreachs

The total number of ICMP Destination Unreachable messages received.

Data Source

RNC_RXI

Source Field

`pmIcmpInDestUnreachs`

Source Section

IpAccessHostGpb

pmIcmpInEchoReps

The total number of ICMP Echo Reply messages received.

Data Source

RNC_RXI

Source Field

`pmIcmpInEchoReps`

Source Section

IpAccessHostGpb

pmIcmpInEchos

The total number of ICMP Echo (request) messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInEchos

Source Section

IpAccessHostGpb

pmIcmpInErrors

The total number of ICMP messages which the entity received but determined as having ICMP-specific errors.

Data Source

RNC_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostGpb

pmIcmpInMsgs

The total number of ICMP messages which the entity received.

Data Source

RNC_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostGpb

pmIcmpInParamProbs

The total number of ICMP Parameter Problem messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInParamProbs

Source Section

IpAccessHostGpb

pmIcmpInRedirects

The total number of ICMP Redirect messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInRedirects

Source Section

IpAccessHostGpb

pmIcmpInSrcQuenchs

The total number of ICMP Source Quench messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInSrcQuenchs

Source Section

IpAccessHostGpb

pmIcmpInTimeExcds

The total number of ICMP Time Exceeded messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInTimeExcds

Source Section

IpAccessHostGpb

pmIcmpOutDestUnreachs

The total number of ICMP Destination Unreachable messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostGpb

pmIcmpOutEchoReps

The total number of ICMP Echo Reply messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutEchoReps

Source Section

IpAccessHostGpb

pmIcmpOutEchos

The total number of ICMP Echo (request) messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutEchos

Source Section

IpAccessHostGpb

pmIcmpOutErrors

The total number of ICMP messages which this entity did not send due to problems discovered within ICMP such as a lack of buffers.

Data Source

RNC_RXI

Source Field

pmIcmpOutErrors

Source Section

IpAccessHostGpb

pmIcmpOutMsgs

The total number of ICMP messages which this entity attempted to send.

Data Source

RNC_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostGpb

pmIcmpOutParamProbs

The total number of ICMP Parameter Problem messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutParamProbs

Source Section

IpAccessHostGpb

pmIpFragCreates

The total number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

RNC_RXI

Source Field

pmIpFragCreates

Source Section

IpAccessHostGpb

pmIpFragFails

The total number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be.

Data Source

RNC_RXI

Source Field

pmIpFragFails

Source Section

IpAccessHostGpb

pmIpFragOKs

The total number of IP datagrams that have been successfully fragmented at this entity.

Data Source

RNC_RXI

Source Field

pmIpFragOKs

Source Section

IpAccessHostGpb

pmIpInAddrErrors

The total number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity.

Data Source

RNC_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostGpb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

Data Source

RNC_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostGpb

pmIpInDiscards

The total number of input IP datagrams for which no problems were encountered to prevent their continued processing, but which were discarded.

Data Source

RNC_RXI

Source Field

pmIpInDiscards

Source Section

IpAccessHostGpb

pmIpInHdrErrors

The total number of input datagrams discarded due to errors in their IP headers.

Data Source

RNC_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostGpb

pmIpInReceives

The total number of input datagrams received from interfaces.

Data Source

RNC_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostGpb

pmIpInUnknownProtos

The total number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

Data Source

RNC_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostGpb

pmIpOutDiscards

The total number of output IP datagrams for which no problem was encountered to prevent their transmission to their destination, but which were discarded (for example, for lack of buffer space).

Data Source

RNC_RXI

Source Field

pmIpOutDiscards

Source Section

IpAccessHostGpb

pmIpOutRequests

The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.

Data Source

RNC_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostGpb

pmIpReasmFails

The total number of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc).

Data Source

RNC_RXI

Source Field

pmIpReasmFails

Source Section

IpAccessHostGpb

pmIpReasmOKs

The total number of IP datagrams successfully re-assembled.

Data Source

RNC_RXI

Source Field

pmIpReasmOKs

Source Section

IpAccessHostGpb

pmIpReasmReqds

The total number of IP fragments received which needed to be reassembled at this entity.

Data Source

RNC_RXI

Source Field

pmIpReasmReqds

Source Section

IpAccessHostGpb

IpAccessHostMsb_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostMsb_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IpAccessHostMsb_NodeB Peg Counts

The following is a list of peg counts for the IpAccessHostMsb_NodeB entity.

pmIcmpInDestUnreachs

The total number of ICMP Destination Unreachable messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInDestUnreachs

Source Section

IpAccessHostMsb

pmIcmpInErrors

The total number of ICMP messages which the entity received but determined as having ICMP-specific errors.

Data Source

NodeB_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostMsb

pmIcmpInMsgs

The total number of ICMP messages which the entity received.

Data Source

NodeB_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostMsb

pmIcmpOutDestUnreachs

The total number of ICMP Destination Unreachable messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostMsb

pmIcmpOutMsgs

The total number of ICMP messages which this entity attempted to send.

Data Source

NodeB_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostMsb

pmIpInAddrErrors

The total number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity.

Data Source

NodeB_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostMsb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

Data Source

NodeB_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostMsb

pmIpInHdrErrors

The total number of input datagrams discarded due to errors in their IP headers.

Data Source

NodeB_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostMsb

pmIpInReceives

The total number of input datagrams received from interfaces.

Data Source

NodeB_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostMsb

pmIpInUnknownProtos

The total number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

Data Source

NodeB_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostMsb

pmIpOutRequests

The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.

Data Source

NodeB_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostMsb

pmUdpInDatagrams

The total number of UDP datagrams delivered to UDP users.

Data Source

NodeB_RXI

Source Field

pmUdpInDatagrams

Source Section

IpAccessHostMsb

pmUdpInErrors

The total number of received UDP datagrams that could not be delivered for reasons other than the lack of an application at the destination port.

Data Source

NodeB_RXI

Source Field

pmUdpInErrors

Source Section

IpAccessHostMsb

pmUdpNoPorts

The total number of received UDP datagrams for which there was no application at the destination port.

Data Source

NodeB_RXI

Source Field

pmUdpNoPorts

Source Section

IpAccessHostMsb

pmUdpOutDatagrams

The total number of UDP datagrams sent from this entity.

Data Source

NodeB_RXI

Source Field

pmUdpOutDatagrams

Source Section

IpAccessHostMsb

IpAccessHostMsb_RNC Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostMsb_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IpAccessHostMsb_RNC Peg Counts

The following is a list of peg counts for the IpAccessHostMsb_RNC entity.

pmIcmpInDestUnreachs

The total number of ICMP Destination Unreachable messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInDestUnreachs

Source Section

IpAccessHostMsb

pmIcmpInErrors

The total number of ICMP messages which the entity received but determined as having ICMP-specific errors.

Data Source

RNC_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostMsb

pmIcmpInMsgs

The total number of ICMP messages which the entity received.

Data Source

RNC_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostMsb

pmIcmpOutDestUnreachs

The total number of ICMP Destination Unreachable messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostMsb

pmIcmpOutMsgs

The total number of ICMP messages which this entity attempted to send.

Data Source

RNC_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostMsb

pmIpInAddrErrors

The total number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity.

Data Source

RNC_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostMsb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

Data Source

RNC_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostMsb

pmIpInHdrErrors

The total number of input datagrams discarded due to errors in their IP headers.

Data Source

RNC_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostMsb

pmIpInReceives

The total number of input datagrams received from interfaces.

Data Source

RNC_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostMsb

pmIpInUnknownProtos

The total number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

Data Source

RNC_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostMsb

pmIpOutRequests

The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.

Data Source

RNC_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostMsb

pmUdpInDatagrams

The total number of UDP datagrams delivered to UDP users.

Data Source

RNC_RXI

Source Field

pmUdpInDatagrams

Source Section

IpAccessHostMsb

pmUdpInErrors

The total number of received UDP datagrams that could not be delivered for reasons other than the lack of an application at the destination port.

Data Source

RNC_RXI

Source Field

pmUdpInErrors

Source Section

IpAccessHostMsb

pmUdpNoPorts

The total number of received UDP datagrams for which there was no application at the destination port.

Data Source

RNC_RXI

Source Field

pmUdpNoPorts

Source Section

IpAccessHostMsb

pmUdpOutDatagrams

The total number of UDP datagrams sent from this entity.

Data Source

RNC_RXI

Source Field

pmUdpOutDatagrams

Source Section

IpAccessHostMsb

IpAccessHostSpb_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostSpb_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IpAccessHostSpb_NodeB Peg Counts

The following is a list of peg counts for the IpAccessHostSpb_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RXI

Source Field

gp

Source Section

IpAccessHostSpb

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

gp

Source Section

IpAccessHostSpb

pmIcmpInDestUnreachs

The number of Internet Control Message Protocol (ICMP) Destination Unreachable messages received. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpInDestUnreachs

Source Section

IpAccessHostSpb

pmIcmpInEchoReps

The number of Internet Control Message Protocol (ICMP) Echo Reply messages received. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpInEchoReps

Source Section

IpAccessHostSpb

pmIcmpInEchos

The number of Internet Control Message Protocol (ICMP) Echo Request messages received. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpInEchos

Source Section

IpAccessHostSpb

pmIcmpInErrors

The number of Internet Control Message Protocol (ICMP) messages that the entity received but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc.). For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostSpb

pmIcmpInMsgs

The total number of Internet Control Message Protocol (ICMP) messages that the entity received. Note that this counter includes all those counted by icmpInErrors. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostSpb

pmIcmpInParamProbs

The number of Internet Control Message Protocol (ICMP) Parameter Problem messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInParamProbs

Source Section

IpAccessHostSpb

pmIcmpInRedirects

The number of Internet Control Message Protocol (ICMP) Redirect messages received

Data Source

NodeB_RXI

Source Field

pmIcmpInRedirects

Source Section

IpAccessHostSpb

pmIcmpInSrcQuenchs

The number of Internet Control Message Protocol (ICMP) Source Quench messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInSrcQuenchs

Source Section

IpAccessHostSpb

pmIcmpInTimeExcds

The number of Internet Control Message Protocol (ICMP) Time Exceeded messages received.

Data Source

NodeB_RXI

Source Field

pmIcmpInTimeExcds

Source Section

IpAccessHostSpb

pmIcmpOutDestUnreachs

The number of Internet Control Message Protocol (ICMP) Destination Unreachable messages sent. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostSpb

pmIcmpOutEchoReps

The number of Internet Control Message Protocol (ICMP) Echo Reply messages sent

Data Source

NodeB_RXI

Source Field

pmIcmpOutEchoReps

Source Section

IpAccessHostSpb

pmIcmpOutEchos

The number of Internet Control Message Protocol (ICMP) Echo Request messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutEchos

Source Section

IpAccessHostSpb

pmIcmpOutErrors

The number of Internet Control Message Protocol (ICMP) messages that this entity did not send due to problems discovered within ICMP, such as a lack of buffers. This value does not include errors discovered outside the ICMP layer, for example the inability of IP to route the resultant datagram.

Data Source

NodeB_RXI

Source Field

pmIcmpOutErrors

Source Section

IpAccessHostSpb

pmIcmpOutMsgs

The total number of Internet Control Message Protocol (ICMP) messages that this entity attempted to send. Note that this counter includes all those messages counted by icmpOutErrors. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostSpb

pmIcmpOutParmProbs

The number of Internet Control Message Protocol (ICMP) Parameter Problem messages sent.

Data Source

NodeB_RXI

Source Field

pmIcmpOutParmProbs

Source Section

IpAccessHostSpb

pmIpFragCreates

The number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

NodeB_RXI

Source Field

pmIpFragCreates

Source Section

IpAccessHostSpb

pmIpFragFails

The number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be fragmented, for example, because their Don't Fragment flag was set.

Data Source

NodeB_RXI

Source Field

pmIpFragFails

Source Section

IpAccessHostSpb

pmIpFragOKs

The number of IP datagrams that have been successfully fragmented at this entity.

Data Source

NodeB_RXI

Source Field

pmIpFragOKs

Source Section

IpAccessHostSpb

pmIpInAddrErrors

The number of input datagrams discarded because the IP address in the destination field of the IP header was not a valid address to be received at this entity. This count includes invalid addresses (for example, 0.0.0.0) and addresses of unsupported Classes (for example, Class E). For entities that are not IP routers and therefore do not forward datagrams, this counter includes datagrams discarded because the destination address was not a local address. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostSpb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user protocols, including Internet Control Message Protocol (ICMP). For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostSpb

pmIpInDiscards

The number of input IP datagrams, for which no problems were encountered that prevent their continued processing, but which were discarded, for example, due to lack of buffer space. Note that this counter does not include any datagrams discarded while awaiting reassembly.

Data Source

NodeB_RXI

Source Field

pmIpInDiscards

Source Section

IpAccessHostSpb

pmIpInHdrErrors

The number of input datagrams discarded due to errors in their IP headers, including bad checksums, version-number mismatch, other format errors, time-to-live exceeded, errors discovered in processing their IP options, etc. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostSpb

pmIpInReceives

The total number of input datagrams received from interfaces, including those received in error. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostSpb

pmIpInUnknownProtos

The number of locally addressed datagrams received successfully but discarded because of an unknown or unsupported protocol. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostSpb

pmIpOutDiscards

The number of output IP datagrams, for which no problem was encountered to prevent transmission to their destination, but which were discarded (for example, due to lack of buffer space). Note that this counter includes datagrams counted in ipForwDatagrams, if any such packets met this (discretionary) discard criterion. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpOutDiscards

Source Section

IpAccessHostSpb

pmIpOutRequests

The total number of IP datagrams which local IP user protocols, including Internet Control Message Protocol (ICMP) supplied to IP in requests for transmission. Note that this counter does not include any datagrams counted in ipForwDatagrams. For additional information, refer to RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostSpb

pmIpReasmFails

The number of failures detected by the IP reassembly algorithm (for whatever reason: timed out, errors, etc). Note that this is not necessarily a count of discarded IP fragments since some

algorithms (notably the algorithm in RFC 815) can lose track of the number of fragments by combining them as they are received.

Data Source

NodeB_RXI

Source Field

pmIpReasmFails

Source Section

IpAccessHostSpb

pmIpReasmOKs

The number of IP datagrams successfully reassembled.

Data Source

NodeB_RXI

Source Field

pmIpReasmOKs

Source Section

IpAccessHostSpb

pmIpReasmReqds

The number of IP fragments received that needed to be reassembled at this entity.

Data Source

NodeB_RXI

Source Field

pmIpReasmReqds

Source Section

IpAccessHostSpb

pmUdpInDatagrams

The total number of User Datagram Protocol (UDP) datagrams delivered to UDP users. For additional information, refer to RFC 2013.

Data Source

NodeB_RXI

Source Field

pmUdpInDatagrams

Source Section

IpAccessHostSpb

pmUdpInErrors

The number of received User Datagram Protocol (UDP) datagrams that could not be delivered for reasons other than the lack of an application at the destination port. For additional information, refer to RFC 2013.

Data Source

NodeB_RXI

Source Field

pmUdpInErrors

Source Section

IpAccessHostSpb

pmUdpNoPorts

The total number of received User Datagram Protocol (UDP) datagrams, for which there was no application at the destination port. For additional information, refer to RFC 2013.

Data Source

NodeB_RXI

Source Field

pmUdpNoPorts

Source Section

IpAccessHostSpb

pmUdpOutDatagrams

The total number of User Datagram Protocol (UDP) datagrams sent from this entity. For additional information, refer to RFC 2013.

Data Source

NodeB_RXI

Source Field

pmUdpOutDatagrams

Source Section

IpAccessHostSpb

IpAccessHostSpb_RNC Primitive Calculations

The following is a list of primitive calculations for the IpAccessHostSpb_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IpAccessHostSpb_RNC Peg Counts

The following is a list of peg counts for the IpAccessHostSpb_RNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

gp

Source Section

IpAccessHostSpb

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

gp

Source Section

IpAccessHostSpb

pmIcmpInDestUnreachs

The number of Internet Control Message Protocol (ICMP) Destination Unreachable messages received. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpInDestUnreachs

Source Section

IpAccessHostSpb

pmIcmpInEchoReps

The number of Internet Control Message Protocol (ICMP) Echo Reply messages received. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpInEchoReps

Source Section

IpAccessHostSpb

pmIcmpInEchos

The number of Internet Control Message Protocol (ICMP) Echo Request messages received. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpInEchos

Source Section

IpAccessHostSpb

pmIcmpInErrors

The number of Internet Control Message Protocol (ICMP) messages that the entity received but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc.). For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpInErrors

Source Section

IpAccessHostSpb

pmIcmpInMsgs

The total number of Internet Control Message Protocol (ICMP) messages that the entity received. Note that this counter includes all those counted by icmpInErrors. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpInMsgs

Source Section

IpAccessHostSpb

pmIcmpInParamProbs

The number of Internet Control Message Protocol (ICMP) Parameter Problem messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInParamProbs

Source Section

IpAccessHostSpb

pmIcmpInRedirects

The number of Internet Control Message Protocol (ICMP) Redirect messages received

Data Source

RNC_RXI

Source Field

pmIcmpInRedirects

Source Section

IpAccessHostSpb

pmIcmpInSrcQuenchs

The number of Internet Control Message Protocol (ICMP) Source Quench messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInSrcQuenchs

Source Section

IpAccessHostSpb

pmIcmpInTimeExcds

The number of Internet Control Message Protocol (ICMP) Time Exceeded messages received.

Data Source

RNC_RXI

Source Field

pmIcmpInTimeExcds

Source Section

IpAccessHostSpb

pmIcmpOutDestUnreachs

The number of Internet Control Message Protocol (ICMP) Destination Unreachable messages sent. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIcmpOutDestUnreachs

Source Section

IpAccessHostSpb

pmIcmpOutEchoReps

The number of Internet Control Message Protocol (ICMP) Echo Reply messages sent

Data Source

RNC_RXI

Source Field

pmIcmpOutEchoReps

Source Section

IpAccessHostSpb

pmIcmpOutEchos

The number of Internet Control Message Protocol (ICMP) Echo Request messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutEchos

Source Section

IpAccessHostSpb

pmIcmpOutErrors

The number of Internet Control Message Protocol (ICMP) messages that this entity did not send due to problems discovered within ICMP, such as a lack of buffers. This value does not include errors discovered outside the ICMP layer, for example the inability of IP to route the resultant datagram.

Data Source

RNC_RXI

Source Field

pmIcmpOutErrors

Source Section

IpAccessHostSpb

pmIcmpOutMsgs

The total number of Internet Control Message Protocol (ICMP) messages that this entity attempted to send. Note that this counter includes all those messages counted by icmpOutErrors. For additional information, refer to RFC 2111.

Data Source

RNC_RXI

Source Field

pmIcmpOutMsgs

Source Section

IpAccessHostSpb

pmIcmpOutParmProbs

The number of Internet Control Message Protocol (ICMP) Parameter Problem messages sent.

Data Source

RNC_RXI

Source Field

pmIcmpOutParmProbs

Source Section

IpAccessHostSpb

pmIpFragCreates

The number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

Data Source

RNC_RXI

Source Field

pmIpFragCreates

Source Section

IpAccessHostSpb

pmIpFragFails

The number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be fragmented, for example, because their Don't Fragment flag was set.

Data Source

RNC_RXI

Source Field

pmIpFragFails

Source Section

IpAccessHostSpb

pmIpFragOKs

The number of IP datagrams that have been successfully fragmented at this entity.

Data Source

RNC_RXI

Source Field

pmIpFragOKs

Source Section

IpAccessHostSpb

pmIpInAddrErrors

The number of input datagrams discarded because the IP address in the destination field of the IP header was not a valid address to be received at this entity. This count includes invalid addresses (for example, 0.0.0.0) and addresses of unsupported Classes (for example, Class E). For entities that are not IP routers and therefore do not forward datagrams, this counter includes datagrams discarded because the destination address was not a local address. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpInAddrErrors

Source Section

IpAccessHostSpb

pmIpInDelivers

The total number of input datagrams successfully delivered to IP user protocols, including Internet Control Message Protocol (ICMP). For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpInDelivers

Source Section

IpAccessHostSpb

pmIpInDiscards

The number of input IP datagrams, for which no problems were encountered that prevent their continued processing, but which were discarded, for example, due to lack of buffer space. Note that this counter does not include any datagrams discarded while awaiting reassembly.

Data Source

RNC_RXI

Source Field

pmIpInDiscards

Source Section

IpAccessHostSpb

pmIpInHdrErrors

The number of input datagrams discarded due to errors in their IP headers, including bad checksums, version-number mismatch, other format errors, time-to-live exceeded, errors discovered in processing their IP options, etc. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpInHdrErrors

Source Section

IpAccessHostSpb

pmIpInReceives

The total number of input datagrams received from interfaces, including those received in error. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpInReceives

Source Section

IpAccessHostSpb

pmIpInUnknownProtos

The number of locally addressed datagrams received successfully but discarded because of an unknown or unsupported protocol. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpInUnknownProtos

Source Section

IpAccessHostSpb

pmIpOutDiscards

The number of output IP datagrams, for which no problem was encountered to prevent transmission to their destination, but which were discarded (for example, due to lack of buffer space). Note that this counter includes datagrams counted in ipForwDatagrams, if any such packets met this (discretionary) discard criterion. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpOutDiscards

Source Section

IpAccessHostSpb

pmIpOutRequests

The total number of IP datagrams which local IP user protocols, including Internet Control Message Protocol (ICMP) supplied to IP in requests for transmission. Note that this counter does not include any datagrams counted in ipForwDatagrams. For additional information, refer to RFC 2011.

Data Source

RNC_RXI

Source Field

pmIpOutRequests

Source Section

IpAccessHostSpb

pmIpReasmFails

The number of failures detected by the IP reassembly algorithm (for whatever reason: timed out, errors, etc). Note that this is not necessarily a count of discarded IP fragments since some algorithms (notably the algorithm in RFC 815) can lose track of the number of fragments by combining them as they are received.

Data Source

RNC_RXI

Source Field

pmIpReasmFails

Source Section

IpAccessHostSpb

pmIpReasmOKs

The number of IP datagrams successfully reassembled.

Data Source

RNC_RXI

Source Field

pmIpReasmOKs

Source Section

IpAccessHostSpb

pmIpReasmReqds

The number of IP fragments received that needed to be reassembled at this entity.

Data Source

RNC_RXI

Source Field

pmIpReasmReqds

Source Section

IpAccessHostSpb

pmUdpInDatagrams

The total number of User Datagram Protocol (UDP) datagrams delivered to UDP users. For additional information, refer to RFC 2133.

Data Source

RNC_RXI

Source Field

pmUdpInDatagrams

Source Section

IpAccessHostSpb

pmUdpInErrors

The number of received User Datagram Protocol (UDP) datagrams that could not be delivered for reasons other than the lack of an application at the destination port. For additional information, refer to RFC 2133.

Data Source

RNC_RXI

Source Field

pmUdpInErrors

Source Section

IpAccessHostSpb

pmUdpNoPorts

The total number of received User Datagram Protocol (UDP) datagrams, for which there was no application at the destination port. For additional information, refer to RFC 2013.

Data Source

RNC_RXI

Source Field

pmUdpNoPorts

Source Section

IpAccessHostSpb

pmUdpOutDatagrams

The total number of User Datagram Protocol (UDP) datagrams sent from this entity. For additional information, refer to RFC 2013.

Data Source

RNC_RXI

Source Field

pmUdpOutDatagrams

Source Section

IpAccessHostSpb

IpAtmLink_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpAtmLink_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Received_Packets_Data_Link_NodeB

Received Packets in IP Data Link Layer

Calculation

vsum(pmNoOfIfInNUcastPkts, pmNoOfIfInUcastPkts)

Sent_Packets_IP_Data_Link_NodeB

Sent Packets in IP Data Link Layer

Calculation

vsum(pmNoOfIfOutNUcastPkts, pmNoOfIfOutUcastPkts)

IpAtmLink_NodeB Peg Counts

The following is a list of peg counts for the IpAtmLink_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

IpAtmLink_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

IpAtmLink_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

IpAtmLink_NodeB_WMGeneral

pmNoOfIfInDiscards

Number of input packets discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInDiscards

Source Section

IpAtmLink_NodeB

pmNoOfIfInErrors

Number of input packets discarded due to any error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInErrors

Source Section

IpAtmLink_NodeB

pmNoOfIfInNUcastPkts

Number of input broadcast/multicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInNUcastPkts

Source Section

IpAtmLink_NodeB

pmNoOfIfInUcastPkts

Number of input unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInUcastPkts

Source Section

IpAtmLink_NodeB

pmNoOfIfOutDiscards

The number of outbound packets discarded due to resource limitations.

Data Source

NodeB_RXI

Source Field

pmNoOfIfOutDiscards

Source Section

IpAtmLink

pmNoOfIfOutNUcastPkts

Number of output broadcast/multicast packets delivered to higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutNUcastPkts

Source Section

IpAtmLink_NodeB

pmNoOfIfOutUcastPkts

Number of out unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutUcastPkts

Source Section

IpAtmLink_NodeB

IpAtmLink_RNC Primitive Calculations

The following is a list of primitive calculations for the IpAtmLink_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Received_Packets_Data_Link_RNC

Sent Packets in IP Data Link Layer

Calculation

vsum (pmNoOfIfOutNUcastPkts, pmNoOfIfOutUcastPkts)

IpAtmLink_RNC Peg Counts

The following is a list of peg counts for the IpAtmLink_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

IpAtmLink_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

IpAtmLink_RNC_WMGeneral

pmNoOfIfInDiscards

Number of input packets discarded due to resource limitations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInDiscards

Source Section

IpAtmLink_RNC

pmNoOfIfInErrors

Number of input packets discarded due to any error.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInErrors

Source Section

IpAtmLink_RNC

pmNoOfIfInNUcastPkts

Number of input broadcast/multicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInNUcastPkts

Source Section

IpAtmLink_RNC

pmNoOfIfInUcastPkts

Number of input unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfInUcastPkts

Source Section

IpAtmLink_RNC

pmNoOfIfOutDiscards

The number of outbound packets discarded due to resource limitations.

Data Source

RNC_RXI

Source Field

pmNoOfIfOutDiscards

Source Section

IpAtmLink

pmNoOfIfOutNUcastPkts

Number of output broadcast/multicast packets delivered to higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutNUcastPkts

Source Section

IpAtmLink_RNC

pmNoOfIfOutUcastPkts

Number of out unicast packets delivered to a higher layer.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIfOutUcastPkts

Source Section

IpAtmLink_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

IpAtmLink_RNC

IpbService Primitive Calculations

The following is a list of primitive calculations for the IpbService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

IpbService Peg Counts

The following is a list of peg counts for the IpbService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

IpbService_Gen

pmForcedRelease

The total number of forced device releases.

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

IpbService

pmNormalRelease

The total number of normal device releases.

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

IpbService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

IpbService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

IpbService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

IpEthPacketDataRouter Primitive Calculations

The following is a list of primitive calculations for the IpEthPacketDataRouter entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IpEthPacketDataRouter Peg Counts

The following is a list of peg counts for the IpEthPacketDataRouter entity.

PERLENSEC

Period length in seconds

Data Source

RNC

Source Field

gp

Source Section

IpEthPacketDataRouter

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

gp

Source Section

IpEthPacketDataRouter

pmNoFaultyIpPackets

Number of faulty IP packets.

Data Source

RNC

Source Field

pmNoFaultyIpPackets

Source Section

IpEthPacketDataRouter

pmNoRoutedIpBytesDL

Number of routed user IP bytes DL.

Data Source

RNC

Source Field

pmNoRoutedIpBytesDI

Source Section

IpEthPacketDataRouter

pmNoRoutedIpBytesUI

Number of routed user IP bytes UL

Data Source

RNC

Source Field

pmNoRoutedIpBytesUI

Source Section

IpEthPacketDataRouter

pmNoRoutedIpPacketsDI

Number of routed user IP packets DL.

Data Source

RNC

Source Field

pmNoRoutedIpPacketsDI

Source Section

IpEthPacketDataRouter

pmNoRoutedIpPacketsUI

Number of routed user IP packets UL.

Data Source

RNC

Source Field

pmNoRoutedIpPacketsUI

Source Section

IpEthPacketDataRouter

pmSamplesPacketDataRab

Number of samples recorded within the ROP period for number of packet data RABs.

Data Source

RNC

Source Field

pmSamplesPacketDataRab

Source Section

IpEthPacketDataRouter

pmSumPacketDataRab

Sum of all sample values recorded for number of packet data RABs.

Data Source

RNC

Source Field

pmSumPacketDataRab

Source Section

IpEthPacketDataRouter

IpInterface_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpInterface_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IpInterface_NodeB Peg Counts

The following is a list of peg counts for the IpInterface_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RXI

Source Field

gp

Source Section

IpInterface

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

gp

Source Section

IpInterface

pmDot1qTpVlanPortInFrames

The number of valid frames received on this port belonging to this VLAN and with a protocol processed by the local forwarding process. See RFC 2674.

Data Source

NodeB_RXI

Source Field

pmDot1qTpVlanPortInFrames

Source Section

IpInterface

pmDot1qTpVlanPortOutFrames

The number of valid frames transmitted from this port belonging to this VLAN. See RFC 2674.

Data Source

NodeB_RXI

Source Field

pmDot1qTpVlanPortOutFrames

Source Section

IpInterface

pmFramesExcTrafDsc

The number of ethernet frames which has exceeded the traffic descriptor. Condition: An ethernet frame is received, which exceeds the traffic descriptor.

Data Source

NodeB_RXI

Source Field

pmFramesExcTrafDsc

Source Section

IpInterface

pmIfStatsIpAddrErrors

Number of received IP datagrams discarded due to invalid header address. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpAddrErrors

Source Section

IpInterface

pmIfStatsIpInDiscards

Number of received IP datagrams discarded due to resource problems (for example, lack of buffer space). See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpInDiscards

Source Section

IpInterface

pmIfStatsIpInHdrErrors

Number of received IP datagrams with an error in the header. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpInHdrErrors

Source Section

IpInterface

pmIfStatsIpInReceives

Number of received IP datagrams, including those with errors. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpInReceives

Source Section

IpInterface

pmIfStatsIpOutDiscards

The number of IP datagrams that should be sent, but which were discarded due to resource problems (for example, lack of buffer space). See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpOutDiscards

Source Section

IpInterface

pmIfStatsIpOutRequests

Number of IP datagrams requested by the IP user protocol to be processed for sending. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpOutRequests

Source Section

IpInterface

pmIfStatsIpUnknownProtos

Number of IP datagrams received, with an unknown or not supported protocol. See RFC 2011.

Data Source

NodeB_RXI

Source Field

pmIfStatsIpUnknownProtos

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter0

The total number of failed pings towards the defaultRouter0 on the active link only. The counter value survives the link switch when applicable.

Data Source

NodeB_RXI

Source Field

pmNoOfFailedPingsDefaultRouter0

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter1

The total number of failed pings towards the defaultRouter1 on the active link only. The counter value survives the link switch when applicable.

Data Source

NodeB_RXI

Source Field

pmNoOfFailedPingsDefaultRouter1

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter2

The total number of failed pings towards the defaultRouter2 on the active link only. The counter value survives the link switch when applicable.

Data Source

NodeB_RXI

Source Field

pmNoOfFailedPingsDefaultRouter2

Source Section

IpInterface

pmOctetsExcTrafDsc

The number of octets which has exceeded the traffic descriptor.

Data Source

NodeB_RXI

Source Field

pmOctetsExcTrafDsc

Source Section

IpInterface

IpInterface_RNC Primitive Calculations

The following is a list of primitive calculations for the IpInterface_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IpInterface_RNC Peg Counts

The following is a list of peg counts for the IpInterface_RNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

gp

Source Section

IpInterface

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

gp

Source Section

IpInterface

pmDot1qTpVlanPortInFrames

The number of valid frames received on this port belonging to this VLAN and with a protocol processed by the local forwarding process. See RFC 2674.

Data Source

RNC_RXI

Source Field

pmDot1qTpVlanPortInFrames

Source Section

IpInterface

pmDot1qTpVlanPortOutFrames

The number of valid frames transmitted from this port belonging to this VLAN. See RFC 2674.

Data Source

RNC_RXI

Source Field

pmDot1qTpVlanPortOutFrames

Source Section

IpInterface

pmFramesExcTrafDsc

The number of ethernet frames which has exceeded the traffic descriptor. Condition: An ethernet frame is received, which exceeds the traffic descriptor.

Data Source

RNC_RXI

Source Field

pmFramesExcTrafDsc

Source Section

IpInterface

pmIfStatsIpAddrErrors

Number of received IP datagrams discarded due to invalid header address. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpAddrErrors

Source Section

IpInterface

pmIfStatsIpInDiscards

Number of received IP datagrams discarded due to resource problems (for example, lack of buffer space). See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpInDiscards

Source Section

IpInterface

pmIfStatsIpInHdrErrors

Number of received IP datagrams with an error in the header. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpInHdrErrors

Source Section

IpInterface

pmIfStatsIpInReceives

Number of received IP datagrams, including those with errors. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpInReceives

Source Section

IpInterface

pmIfStatsIpOutDiscards

The number of IP datagrams that should be sent, but which were discarded due to resource problems (for example, lack of buffer space). See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpOutDiscards

Source Section

IpInterface

pmIfStatsIpOutRequests

Number of IP datagrams requested by the IP user protocol to be processed for sending. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpOutRequests

Source Section

IpInterface

pmIfStatsIpUnknownProtos

Number of IP datagrams received, with an unknown or not supported protocol. See RFC 2011.

Data Source

RNC_RXI

Source Field

pmIfStatsIpUnknownProtos

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter0

The total number of failed pings towards the defaultRouter0 on the active link only. The counter value survives the link switch when applicable.

Data Source

RNC_RXI

Source Field

pmNoOfFailedPingsDefaultRouter0

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter1

The total number of failed pings towards the defaultRouter1 on the active link only. The counter value survives the link switch when applicable.

Data Source

RNC_RXI

Source Field

pmNoOfFailedPingsDefaultRouter1

Source Section

IpInterface

pmNoOfFailedPingsDefaultRouter2

The total number of failed pings towards the defaultRouter2 on the active link only. The counter value survives the link switch when applicable.

Data Source

RNC_RXI

Source Field

pmNoOfFailedPingsDefaultRouter2

Source Section

IpInterface

pmOctetsExcTrafDsc

The number of octets which has exceeded the traffic descriptor.

Data Source

RNC_RXI

Source Field

pmOctetsExcTrafDsc

Source Section

IpInterface

IpSystem_NodeB Primitive Calculations

The following is a list of primitive calculations for the IpSystem_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IpSystem_RNC Primitive Calculations

The following is a list of primitive calculations for the IpSystem_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IubDataStreams Primitive Calculations

The following is a list of primitive calculations for the IubDataStreams entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IubDataStreams Peg Counts

The following is a list of peg counts for the IubDataStreams entity.

PERLENSEC

Period Length

Data Source

NodeB

Source Field

perlensec

Source Section

IubDataStreams_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB

Source Field

perlensec

Source Section

IubDataStreams_WMGeneral

pmCalcIubHsLmtRatSpi00

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi00

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi01

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi01

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi02

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi02

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi03

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi03

Source Section

IubDataStreams

pmCAIubHsLmtRatSpi04

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi04

Source Section

IubDataStreams

pmCAIubHsLmtRatSpi05

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi05

Source Section

IubDataStreams

pmCalcIubHsLmtRatSpi06

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi06

Source Section

IubDataStreams

pmCalcIubHsLmtRatSpi07

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi07

Source Section

IubDataStreams

pmCalcIubHsLmtRatSpi08

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi08

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi09

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi09

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi10

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi10

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi11

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI.

The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi11

Source Section

IubDataStreams

pmCAIubHsLmtRatSpi12

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI.
The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi12

Source Section

IubDataStreams

pmCAIubHsLmtRatSpi13

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI.
The different flows are configured ON/OFF using RBS MOM parameter
IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi13

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi14

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi14

Source Section

IubDataStreams

pmCAIcIubHsLmtRatSpi15

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatioSpi15

Source Section

IubDataStreams

pmCapAllocIubHsLimitingRatio

The relative number of occurrences when the calculated capacity allocation figure is limited by the Iub high-speed bandwidth during a 100 ms period

Data Source

NodeB

Source Field

pmCapAllocIubHsLimitingRatio

Source Section

IubDataStreams

pmDchFramesCrcMismatch

The number of DCH Iub FP frames discarded owing to header or payload CRC mismatch.

Data Source

NodeB

Source Field

pmDchFramesCrcMismatch

Source Section

IubDataStreams

pmDchFramesLate

The number of DCH Iub FP frames arrived after ToAWE but before LTOA.

Data Source

NodeB

Source Field

pmDchFramesLate

Source Section

IubDataStreams

pmDchFramesOutOfSequenceDI

The number of Iub DCH Frame Protocol (FP) frames received out-of-sequence in the downlink direction.

Data Source

NodeB

Source Field

pmDchFramesOutOfSequenceDl

Source Section

IubDataStreams

pmDchFramesReceived

The number of received DCH Iub frames in kframes (1000 frames).

Data Source

NodeB

Source Field

pmDchFramesReceived

Source Section

IubDataStreams

pmDchFramesTooLate

The number of DCH Iub FP frames discarded owing to too late arrival, that is, after LTOA.

Data Source

NodeB

Source Field

pmDchFramesTooLate

Source Section

IubDataStreams

pmEdchIubLimitingRatio

PEG Counter for the number of 100 ms periods where the Iub has been the only limiting factor during at least one TTI is divided by the number of 100 ms periods during which edchGrantRate has been bigger than zero. The result is a percentage figure between 0.0 and 100.0%. Trigger: The E-DCH scheduler is limited by 1) RBS HW, 2) Iub bandwidth, and 3) Uu interface resources. These resource limitations for this measurement are measured every 100 ms. Each 100 ms period that the UE wanted EUL bit rate (edchGrantRate) during any of the 2 or/and 10 ms TTIs during the 100 ms period that has been higher than the available resources and that the only limiting resource during at least one of these TTIs has been the E-DCH Iub Scheduler

Limit Rate (edchIubSchLimitRate), then that 100 ms period is marked as an Iub Limiting period.

Data Source

NodeB

Source Field

pmEdchIubLimitingRatio

Source Section

IubDataStreams

pmHsDataFramesLost

(Retired in Utran P6)The number of high-speed data frames lost over Iub in the RBS.

Data Source

NodeB

Source Field

pmHsDataFramesLost

Source Section

IubDataStreams

pmHsDataFramesReceived

The total number of high-speed data frames received over Iub in the RBS

Data Source

NodeB

Source Field

pmHsDataFramesReceived

Source Section

IubDataStreams

pmHsDataFrmsRxSpi00

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi00

Source Section

IubDataStreams

pmHsDataFrmsRxSpi01

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi01

Source Section

IubDataStreams

pmHsDataFrmsRxSpi02

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi02

Source Section

IubDataStreams

pmHsDataFrmsRxSpi03

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi03

Source Section

IubDataStreams

pmHsDataFrmsRxSpi04

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi04

Source Section

IubDataStreams

pmHsDataFrmsRxSpi05

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi05

Source Section

IubDataStreams

pmHsDataFrmsRxSpi06

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi06

Source Section

IubDataStreams

pmHsDataFrmsRxSpi07

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi07

Source Section

IubDataStreams

pmHsDataFrmsRxSpi08

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi08

Source Section

IubDataStreams

pmHsDataFrmsRxSpi09

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi09

Source Section

IubDataStreams

pmHsDataFrmsRxSpi10

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi10

Source Section

IubDataStreams

pmHsDataFrmsRxSpi11

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi11

Source Section

IubDataStreams

pmHsDataFrmsRxSpi12

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi12

Source Section

IubDataStreams

pmHsDataFrmsRxSpi13

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams:: schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi13

Source Section

IubDataStreams

pmHsDataFrmsRxSpi14

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi14

Source Section

IubDataStreams

pmHsDataFrmsRxSpi15

The total number of high-speed data frames received by the RBS over the Iub interface. Each counter observes a specific Scheduler Priority Index (SPI). The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesReceivedSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi00_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi00

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi01_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi01

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi02_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi02

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi03_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi03

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi04_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi04

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi05_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi05

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi06_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi06

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi07_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi07

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi08_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi08

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi09_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi09

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi10_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi10

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi11_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi11

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi12_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi12

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi13_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi13

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi14_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi14

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_01

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_02

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_03

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_04

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_05

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_06

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_07

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_08

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_09

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_10

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_11

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute.

Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_12

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_13

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_14

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_15

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrDelayIubSpi15_16

This PDF gives the dynamic delay for all defined scheduled HS-DSCH data frame flows carried over Iub. This is needed as the basis for adjusting the hsDataFrameDelayThreshold attribute. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFrameDelayIubSpi15

Source Section

IubDataStreams

pmHsDtFrLostSpi00

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi00

Source Section

IubDataStreams

pmHsDtFrLostSpi01

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi01

Source Section

IubDataStreams

pmHsDtFrLostSpi02

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi02

Source Section

IubDataStreams

pmHsDtFrLostSpi03

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi03

Source Section

IubDataStreams

pmHsDtFrLostSpi04

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi04

Source Section

IubDataStreams

pmHsDtFrLostSpi05

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi05

Source Section

IubDataStreams

pmHsDtFrLostSpi06

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi06

Source Section

IubDataStreams

pmHsDtFrLostSpi07

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi07

Source Section

IubDataStreams

pmHsDtFrLostSpi08

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi08

Source Section

IubDataStreams

pmHsDtFrLostSpi09

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi09

Source Section

IubDataStreams

pmHsDtFrLostSpi10

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi10

Source Section

IubDataStreams

pmHsDtFrLostSpi11

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi11

Source Section

IubDataStreams

pmHsDtFrLostSpi12

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi12

Source Section

IubDataStreams

pmHsDtFrLostSpi13

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi13

Source Section

IubDataStreams

pmHsDtFrLostSpi14

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi14

Source Section

IubDataStreams

pmHsDtFrLostSpi15

The number of high-speed data frames lost by the RBS in the Iub interface. Each counter observes a specific SPI. The different flows are configured ON/OFF using RBS MOM parameter IubDataStreams::schHsFlowControlOnOff.

Data Source

NodeB

Source Field

pmHsDataFramesLostSpi15

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_000

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 0 to 200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_001

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 200 to 400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_002

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 400 to 600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_003

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 600 to 800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_004

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 800 to 1000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_005

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 1000 to 1200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_006

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 1200 to 1400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_007

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 1400 to 1600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_008

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 1600 to 1800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_009

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 1800 to 2000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_010

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 2000 to 2200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_011

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 2200 to 2400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_012

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 2400 to 2600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_013

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 2600 to 2800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_014

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 2800 to 3000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_015

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 3000 to 3200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_016

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 3200 to 3400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_017

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 3400 to 3600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_018

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 3600 to 3800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_019

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 3800 to 4000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_020

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 4000 to 4200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_021

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 4200 to 4400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_022

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 4400 to 4600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_023

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 4600 to 4800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_024

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 4800 to 5000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_025

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 5000 to 5200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_026

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 5200 to 5400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_027

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 5400 to 5600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_028

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 5600 to 5800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_029

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 5800 to 6000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_030

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 6000 to 6200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_031

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 6200 to 6400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_032

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 6400 to 6600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_033

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 6600 to 6800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_034

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 6800 to 7000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_035

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 7000 to 7200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_036

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 7200 to 7400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_037

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 7400 to 7600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_038

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 7600 to 7800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_039

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 7800 to 8000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_040

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 8000 to 8200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_041

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 8200 to 8400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_042

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 8400 to 8600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_043

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 8600 to 8800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_044

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 8800 to 9000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_045

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 9000 to 9200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_046

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 9200 to 9400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_047

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 9400 to 9600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_048

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 9600 to 9800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_049

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 9800 to 10000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_050

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 10000 to 10200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_051

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 10200 to 10400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_052

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 10400 to 10600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_053

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 10600 to 10800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_054

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 10800 to 11000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_055

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 11000 to 11200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_056

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 11200 to 11400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_057

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 11400 to 11600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_058

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 11600 to 11800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_059

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 11800 to 12000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_060

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 12000 to 12200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_061

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 12200 to 12400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_062

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 12400 to 12600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_063

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 12600 to 12800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_064

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 12800 to 13000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_065

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 13000 to 13200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_066

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 13200 to 13400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_067

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 13400 to 13600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_068

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 13600 to 13800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_069

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 13800 to 14000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_070

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 14000 to 14200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_071

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 14200 to 14400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_072

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 14400 to 14600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_073

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 14600 to 14800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_074

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 14800 to 15000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_075

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 15000 to 15200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_076

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 15200 to 15400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_077

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 15400 to 15600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_078

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 15600 to 15800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_079

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 15800 to 16000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_080

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 16000 to 16200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_081

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 16200 to 16400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_082

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 16400 to 16600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_083

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 16600 to 16800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_084

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 16800 to 17000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_085

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 17000 to 17200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_086

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 17200 to 17400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_087

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 17400 to 17600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_088

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 17600 to 17800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_089

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 17800 to 18000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_090

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 18000 to 18200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_091

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 18200 to 18400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_092

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 18400 to 18600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_093

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 18600 to 18800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_094

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 18800 to 19000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_095

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 19000 to 19200 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_096

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 19200 to 19400 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_097

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 19400 to 19600 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_098

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 19600 to 19800 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_099

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 19800 to 20000 kbps

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmIubMacdPduRbsReceivedBits_100

Received numbers of Iub Media Access Control-dedicated Power Distribution Unit (MAC-d PDU) bits every second in the range 20000 and upwards

Data Source

NodeB

Source Field

pmIubMacdPduRbsReceivedBits

Source Section

IubDataStreams

pmNoUlIubLimitEul

PEG Counter for the number of times a scheduling decision is taken to increase the Iub rate of an E-DCH user and there is a need to decrease the Iub rate for another E-DCH user owing to UL Iub resource limitations. Trigger: The counter is stepped when a scheduling decision is taken to increase the Iub rate for an E-DCH user and there is a need to decrease the Iub rate for another E-DCH user owing to UL Iub resource limitations.

Data Source

NodeB

Source Field

pmNoUIIubLimitEul

Source Section

IubDataStreams

pmRbsHsPdschCodePrio

Counter that accumulates the number of code shortage occurrences, that is, number of times priority resolve is entered in the algorithm for dynamic code allocation.

Data Source

NodeB

Source Field

pmRbsHsPdschCodePrio

Source Section

IubDataStreams

pmTargetHsRate_000

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 0 to 1

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_001

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 1 to 2

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_002

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 2 to 3

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_003

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 3 to 4

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_004

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 4 to 5

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_005

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 5 to 6

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_006

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 6 to 7

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_007

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 7 to 8

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_008

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 8 to 9

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_009

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 9 to 10

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_010

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 10 to 11

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_011

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 11 to 12

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_012

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 12 to 13

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_013

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 13 to 14

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_014

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 14 to 15

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_015

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 15 to 16

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_016

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 16 to 17

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_017

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 17 to 18

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_018

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 18 to 19

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_019

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 19 to 20

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_020

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 20 to 21

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_021

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 21 to 22

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_022

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 22 to 23

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_023

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 23 to 24

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_024

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 24 to 25

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_025

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 25 to 26

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_026

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 26 to 27

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_027

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 27 to 28

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_028

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 28 to 29

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_029

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 29 to 30

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_030

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 30 to 31

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_031

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 31 to 32

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_032

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 32 to 33

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_033

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 33 to 34

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_034

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 34 to 35

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_035

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 35 to 36

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_036

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 36 to 37

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_037

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 37 to 38

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_038

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 38 to 39

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_039

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 39 to 40

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_040

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 40 to 41

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_041

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 41 to 42

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_042

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 42 to 43

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_043

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 43 to 44

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_044

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 44 to 45

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_045

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 45 to 46

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_046

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 46 to 47

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_047

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 47 to 48

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_048

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 48 to 49

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_049

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 49 to 50

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_050

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 50 to 51

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_051

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 51 to 52

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_052

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 52 to 53

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_053

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 53 to 54

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_054

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 54 to 55

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_055

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 55 to 56

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_056

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 56 to 57

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_057

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 57 to 58

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_058

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 58 to 59

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_059

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 59 to 60

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_060

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 60 to 61

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_061

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 61 to 62

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_062

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 62 to 63

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_063

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 63 to 64

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_064

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 64 to 65

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_065

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 65 to 66

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_066

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 66 to 67

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_067

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 67 to 68

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_068

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 68 to 69

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_069

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 69 to 70

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_070

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 70 to 71

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_071

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 71 to 72

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_072

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 72 to 73

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_073

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 73 to 74

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_074

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 74 to 75

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_075

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 75 to 76

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_076

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 76 to 77

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_077

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 77 to 78

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_078

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 78 to 79

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_079

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 79 to 80

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_080

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 80 to 81

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_081

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 81 to 82

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_082

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 82 to 83

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_083

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 83 to 84

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_084

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 84 to 85

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_085

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 85 to 86

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_086

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 86 to 87

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_087

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 87 to 88

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_088

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 88 to 89

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_089

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 89 to 90

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_090

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 90 to 91

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_091

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 91 to 92

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_092

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 92 to 93

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_093

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 93 to 94

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_094

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 94 to 95

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_095

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 95 to 96

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_096

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 96 to 97

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_097

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 97 to 98

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_098

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 98 to 99

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_099

Target high-speed rate as percentage of the value of the maxHsRate parameter in the range 99 to 100

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

pmTargetHsRate_100

Target high-speed rate as percentage of the value of the maxHsRate parameter more than 100

Data Source

NodeB

Source Field

pmTargetHsRate

Source Section

IubDataStreams

IubEdch Primitive Calculations

The following is a list of primitive calculations for the IubEdch entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IubEdch Peg Counts

The following is a list of peg counts for the IubEdch entity.

PERLENSEC

Period length in seconds

Data Source

RNC

Source Field

gp

Source Section

IubEdch

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

gp

Source Section

IubEdch

pmEdchDataFrameDelayIub_00

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $0 \leq x < 10$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_01

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $10 \leq x < 20$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_02

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $20 \leq x < 30$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_03

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $30 \leq x < 40$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_04

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $40 \leq x < 50$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_05

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $50 \leq x < 60$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_06

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $60 \leq x < 70$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_07

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $70 \leq x < 80$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_08

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $80 \leq x < 90$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_09

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $90 \leq x < 100$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_10

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $100 \leq x < 110$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_11

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $110 \leq x < 120$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_12

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $120 \leq x < 130$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_13

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $130 \leq x < 140$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_14

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $140 \leq x < 150$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFrameDelayIub_15

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the interval, defined in ms: $x \geq 150$

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IubEdch

pmEdchDataFramesLost

Number of lost E-DCH data frames.

Data Source

RNC

Source Field

pmEdchDataFramesLost

Source Section

IubEdch

pmEdchDataFramesReceived

Number of correctly received E-DCH data frames.

Data Source

RNC

Source Field

pmEdchDataFramesReceived

Source Section

IubEdch

IubLink Primitive Calculations

The following is a list of primitive calculations for the IubLink entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IubLink Peg Counts

The following is a list of peg counts for the IubLink entity.

availabilityStatus

The availability status of the Iub. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

IubLink

beMarginDIHw

Relative admission limit on RBS DL HW resource utilisation applicable to non-handover non-guaranteed admission requests. In the parameter name ?be? stands for ?best effort?. { long, Range = 0..100, Default=10 }

Data Source

Bulk CM

Source Section

IubLink

beMarginUIHw

Relative admission limit on RBS UL HW resource utilisation applicable to non-handover non-guaranteed admission requests. In the parameter name ?be? stands for ?best effort?. { long, Range = 0..100, Default=10 }

Data Source

Bulk CM

Source Section

IubLink

dlHwAdm

Admission limit on RBS DL HW resource utilisation applicable to non-handover guaranteed admission requests. This parameter is also used together with beMarginDIHw for non-handover non-guaranteed admission requests. { long, Range = 0..100, Default=70 }

Data Source

Bulk CM

Source Section

IubLink

iubLinkNodeBFunction

The value of this attribute shall be the FDN of the related NodeBFunction instance.

Data Source

Bulk CM

Source Field

un:iubLinkNodeBFunction

Source Section

IubLink

iubLinkUtranCell

The value of this attribute shall be a list of the FDN(s) of the related UtranCell instance(s).

Data Source

Bulk CM

Source Field

un:iubLinkUtranCell

Source Section

IubLink

operationalState

The operational state of Iub. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

IubLink

pmDchFramesOutOfSequenceUl

The number of Iur DCH Frame Protocol frames received out-of-sequence in the uplink direction in SRNC.

Data Source

RNC

Source Field

pmDchFramesOutOfSequenceUl

Source Section

IubLink

pmDlCredits_00

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_01

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_02

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_03

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_04

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_05

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_06

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_07

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDlCredits

Source Section

IubLink

pmDlCredits_08

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDLCredits

Source Section

IubLink

pmDLCredits_09

The total consumed RBS DL credits, as a percentage.

Data Source

RNC

Source Field

pmDLCredits

Source Section

IubLink

pmHsSevereCong

This counter counts the number of severe congestion occurrences detected by the "CAPACITY ALLOCATION Presence Supervision" function in RNC. This is done per Iub/Iur interface. A CAPACITY ALLOCATION control frame is expected at least every one second from RBS per flow controlled HS flow. If a CA has not been received for a longer period of time, an HS Severe Congestion is detected. These interface counters shall normally be zero.

Data Source

RNC

Source Field

pmHsSevereCong

Source Section

IubLink

pmIubLinkDynamicDelayMax

Maximum dynamic delay in milliseconds between the RNC and the RBS on the radio network layer.

Data Source

RNC

Source Field

pmIubLinkDynamicDelayMax

Source Section

NodeSynch

pmIubLinkStaticDelay

Monitor the lowest one-way delay in milliseconds between the RNC and RBS on the radio network layer.

Data Source

RNC

Source Field

pmIubLinkStaticDelay

Source Section

NodeSynch

pmNoMtchTimingAdjContrFrames

Number of received downlink timing adjustment control frames for MTCH FACH is counted to provide observability for RBSes where synchronization for MBMS can not be provided. A counter value of 0 means that no frames arrive too late or too early. A moderate counter value (1-approximately 200) indicates frames occasionally arrive too late or too early. This indicates problems with high delay variation in the transport network. A modification of the iubTransportDelayOffset (DTO) value for MTCH frame synchronization may be required. A very high value (close to 900) probably points at a problem with network synchronization.

Data Source

RNC

Source Field

pmNoMtchTimingAdjContrFrames

Source Section

IubLink

pmNoOfDiscardedNbapcMessages

Number of NBAP Common messages rejected by Admission Control due to L2 signaling bearer congestion.

Data Source

RNC

Source Field

pmNoOfDiscardedNbapcMessages

Source Section

IubLink

pmSamplesDlCredits

Number of samples in pmSumDlCredits (that is, pmSamplesDlCredits = pmSumDlCredits +1, whenever pmSumDlCredits is to be updated).

Data Source

RNC

Source Field

pmSamplesDlCredits

Source Section

IubLink

pmSamplesUlCredits

Number of samples in pmSumUlCredits (that is, pmSamplesUlCredits = pmSumUlCredits +1, whenever pmSumUlCredits is to be updated).

Data Source

RNC

Source Field

pmSamplesUlCredits

Source Section

IubLink

pmSumDlCredits

Aggregate of total consumed RBS DL credit measurements (in credits).

Data Source

RNC

Source Field

pmSumDlCredits

Source Section

IubLink

pmSumSqrDlCredits

Aggregate of the squares of the individual measurements in pmSumDlCredits (that is, $\text{pmSumSqrDlCredits} = \text{pmSumDlCredits} + \text{measurement_value}^2$).

Data Source

RNC

Source Field

pmSumSqrDlCredits

Source Section

IubLink

pmSumSqrUlCredits

Aggregate of the squares of the individual measurements in pmSumUlCredits (that is, $\text{pmSumSqrUlCredits} = \text{pmSumUlCredits} + \text{measurement_value}^2$).

Data Source

RNC

Source Field

pmSumSqrUlCredits

Source Section

IubLink

pmSumUICredits

Aggregate of total consumed RBS UL credit measurements (in credits).

Data Source

RNC

Source Field

pmSumUICredits

Source Section

IubLink

pmTotalTimeIubLinkCongestedDI

The time in seconds that the Iublink is congested on the NBAP Common part of the control plane.

Data Source

RNC

Source Field

pmTotalTimeIubLinkCongestedDI

Source Section

IubLink

pmTotalTimeIubLinkUnavail

The time in seconds that the Iub link is unavailable for the NBAP Common part of the control plane, due to network or node internal problems.

Data Source

RNC

Source Field

pmTotalTimeIubLinkUnavail

Source Section

IubLink

pmUICredits_00

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_01

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_02

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_03

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_04

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_05

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_06

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_07

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_08

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

pmUICredits_09

The total consumed RBS UL credits, as a percentage.

Data Source

RNC

Source Field

pmUICredits

Source Section

IubLink

rbsId

Iub Connection identity. The value is not used by the RNC. It is used in OSS-RC for correlation between RNC and RBS. { long, Range = 0.., Default=Mandatory NoNotification }

Data Source

Bulk CM

Source Section

IubLink

reservedBy

Sequence of UtranCell MO references. Indicates all of the UTRAN cells that are associated with the RBS represented by this IubLink. { sequence<UtranCell,6>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

IubLink

rncModuleRef

Reference to the RncModule MO that it belongs to.

Data Source

Bulk CM

Source Field

es:rncModuleRef

Source Section

IubLink

tpcPattern01CountDI

System constant. { long, Default=8 }

Data Source

Bulk CM

Source Section

IubLink

ulHwAdm

Admission limit on RBS UL HW resource utilisation applicable to non-handover guaranteed admission requests. { long, Range = 0..100, Default=70 }

Data Source

Bulk CM

Source Section

IubLink

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

IubLink

IuLink Primitive Calculations

The following is a list of primitive calculations for the IuLink entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

IuLink Peg Counts

The following is a list of peg counts for the IuLink entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

pmInFrames

Number of FP frames received over the Iucs link. The counter is stepped for each frame protocol frame that is received per Iucs link. This counter is stepped regardless of whether the underlying transport network is IP or underlying transport network is IP or ATM.

Data Source

RNC

Source Field

pmInFrames

Source Section

IuLink

pmInLostFrames

Number of FP frames lost over the Iucs link in the received direction. The counter is stepped for each frame protocol frame that is lost in the received direction per Iucs link, when the Iucs is over IP.

Data Source

RNC

Source Field

pmInLostFrames

Source Section

IuLink

pmInOutOfSequenceFrames

Number of out-of-sequence FP frames received per Iucs link. The counter is stepped for each out-of-sequence frame protocol frame that is received per Iucs link. This counter is stepped only when the underlying transport network is IP. A frame is considered to be out-of-sequence when frame_n (or less) arrives after frame_n+1.

Data Source

RNC

Source Field

pmInOutOfSequenceFrames

Source Section

IuLink

pmOutFrames

Number of FP frames sent over the Iucs link. The counter is stepped for each frame protocol frame that is sent per Iucs link. This counter is stepped regardless of whether the underlying transport network is IP or ATM.

Data Source

RNC

Source Field

pmOutFrames

Source Section

IuLink

IurLink Primitive Calculations

The following is a list of primitive calculations for the IurLink entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

LubLink Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

IurLink Peg Counts

The following is a list of peg counts for the IurLink entity.

aliasPlmnIdentities

List of alias PLMN identities to the target PLMN id of the External RNC represented by this IurLink object. { sequence<PlmnIdentity,30>, Default = empty, Default= }

Data Source

Bulk CM

Source Section

IurLink

mcc

The MCC part of the PLMN identity used in the radio network. { long, Range = 0..999, Default=Mandatory }

Data Source

Bulk CM

Source Section

IurLink

mnc

The MNC part of the PLMN identity used in the radio network. { long, Range = 0..999, Default=Mandatory }

Data Source

Bulk CM

Source Section

IurLink

mncLength

The length of the MNC part of the PLMN identity used in the Gsm radio network. { long, Range = 2..3, Default=Mandatory }

Data Source

Bulk CM

Source Section

IurLink

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

IurLink_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

PERLENSEC

Source Section

IurLink_WMGeneral

pmDchFramesOutOfSequenceUl

The number of Iur DCH Frame Protocol frames received out-of-sequence in the uplink direction in SRNC.

Data Source

RNC

Source Field

pmDchFramesOutOfSequenceUl

Source Section

IurLink

pmEdchDataFrameDelayIub_00

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_01

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_02

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_03

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_04

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_05

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_06

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_07

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_08

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_09

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_10

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_11

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_12

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_13

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_14

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFrameDelayIub_15

Enhanced Uplink Iub dynamic delay measurement results. Stores the number of times that the measured delay matches the intervals below, defined in ms. The counter bridges both Iur and Iub and therefore reflects the delay across both.

Data Source

RNC

Source Field

pmEdchDataFrameDelayIub

Source Section

IurLink

pmEdchDataFramesLost

Number of lost E-DCH data frames.

Data Source

RNC

Source Field

pmEdchDataFramesLost

Source Section

IurLink

pmEdchDataFramesReceived

Number of correctly received E-DCH data frames.

Data Source

RNC

Source Field

pmEdchDataFramesReceived

Source Section

IurLink

pmHsSevereCong

This counter counts the number of severe congestion occurrences detected by the "CAPACITY ALLOCATION Presence Supervision" function in RNC. This is done per Iub/Iur interface. A CAPACITY ALLOCATION control frame is expected at least every one second from RBS per flow controlled HS flow. If a CA has not been received for a longer period of time, an HS Severe Congestion is detected. These interface counters shall normally be zero.

Data Source

RNC

Source Field

pmHsSevereCong

Source Section

IurLink

pmIurCommonControlFrames

Number of control frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonControlFrames

Source Section

IurCchUp

pmIurCommonControlFramesFaulty

Number of faulty control frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonControlFramesFaulty

Source Section

IurCchUp

pmIurCommonDIFrames

Number of downlink frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonDIFrames

Source Section

IurCchUp

pmIurCommonDIFramesFaulty

Number of DL frames on Iur common transport bearers with faulty header- or payload CRC.-
Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonDIFramesFaulty

Source Section

IurCchUp

pmIurCommonEstAttExistTranspBearer

Number Iur common trans Chan resource estabt attempt toward DRNC when established transport bearer is used- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonEstAttExistTranspBearer

Source Section

IurCchCp

pmIurCommonEstAttNewTranspBearer

Number Iur common trans Chan resource estabt attempt towards DRNC when new transport bearer is requested- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonEstAttNewTranspBearer

Source Section

IurCchCp

pmIurCommonEstSuccExistTranspBearer

Number of successful Iur common trans Chan resource estabt attempt toward DRNC when established transport bearer is used- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonEstSuccExistTranspBearer

Source Section

IurCchCp

pmIurCommonEstSuccNewTranspBearer

Number of successful Iur common trans Chan resource establt attempt towards DRNC when new transport bearer is requested- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonEstSuccNewTranspBearer

Source Section

IurCchCp

pmIurCommonFachControlFrames

Number of FACH flow control frames with credits=0 on Iur Common Transport Bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonFachControlFrames

Source Section

IurCchUp

pmIurCommonFachControlFrameTimeout

Number timeouts waiting for FACH control frame with credits > 0 on Iur common trans- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonFachControlFrameTimeout

Source Section

IurCchUp

pmIurCommonFachDataFrames

Number of FACH Data frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonFachDataFrames

Source Section

IurCchUp

pmIurCommonFachDataFramesFaulty

Number of discarded FACH Data frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonFachDataFramesFaulty

Source Section

IurCchUp

pmIurCommonRelease

Number of Iur common transport channel resource releases towards a DRNC.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonRelease

Source Section

IurCchCp

pmIurCommonUIFrames

Number of uplink frames on Iur common transport bearers.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonUIFrames

Source Section

IurCchUp

pmIurCommonUIFramesFaulty

Number UL frames Iur common trans bearers with faulty header or payload CRC.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurCommonUIFramesFaulty

Source Section

IurCchUp

pmIurTranspBearerRelease

Number transport bearer release due to lack of use.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmIurTranspBearerRelease

Source Section

IurCchCp

pmNoAttIncCnhhoCsNonSpeech

Number of attempts to perform incoming CN Hard Handover for a CS RAB (other than speech).

Source Field

pmNoAttIncCnhhoCsNonSpeech

Source Section

IurLink

pmNoAttIncCnhhoSpeech

Number of attempts to perform incoming CN Hard Handover for a speech RAB.

Source Field

pmNoAttIncCnhhoSpeech

Source Section

IurLink

pmNoNormalRabReleaseCs64

Number of normal CS64 RAB releases over Iur (i.e. normal releases of a drifting CS64 call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoNormalRabReleaseCs64

Source Section

IurLink

pmNoNormalRabReleaseCsStream

Number of normal CS streaming RAB releases over Iur (i.e. normal releases of a drifting CS streaming call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoNormalRabReleaseCsStream

Source Section

IurLink

pmNoNormalRabReleasePacket

Number of normal packet RAB releases over Iur (i.e. normal releases of a drifting packet call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoNormalRabReleasePacket

Source Section

IurLink

pmNoNormalRabReleasePacketStream

Number of normal PS streaming RAB releases over Iur (i.e. normal releases of a drifting PS streaming call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoNormalRabReleasePacketStream

Source Section

IurLink

pmNoNormalRabReleaseSpeech

Number of normal speech RAB releases over Iur (i.e. normal releases of a drifting speech call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoNormalRabReleaseSpeech

Source Section

IurLink

pmNoOfRlForDriftingUesPerDrnc

Current number of RLs assigned in cells belonging to the DRNC, for UEs that are served by this RNC

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRIForDriftingUesPerDrnc

Source Section

IurLink

pmNoSuccIncCnhhoCsNonSpeech

Number of successful incoming CN Hard Handover for a CS RAB (other than Speech).

Source Field

pmNoSuccIncCnhhoCsNonSpeech

Source Section

IurLink

pmNoSuccIncCnhhoSpeech

Number of successful incoming CN Hard Handover for a speech RAB.

Source Field

pmNoSuccIncCnhhoSpeech

Source Section

IurLink

pmNoSystemRabReleaseCs64

Number of system CS64 RAB releases over Iur (i.e. system releases of a drifting CS64 call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoSystemRabReleaseCs64

Source Section

IurLink

pmNoSystemRabReleaseCsStream

Number of system CS Streaming RAB releases over Iur (i.e. system release of a drifting CS Streaming call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoSystemRabReleaseCsStream

Source Section

IurLink

pmNoSystemRabReleasePacket

Number of system packet RAB releases over Iur (i.e. system releases of a drifting packet call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoSystemRabReleasePacket

Source Section

IurLink

pmNoSystemRabReleasePacketStream

Number of overall release triggered by cchWaitCuT expiry

Source Field

pmNoSystemRabReleasePacketStream

Source Section

IurLink

pmNoSystemRabReleaseSpeech

Number of system speech RAB releases over Iur (i.e. releases of a drifting speech call), referred to the IurLink representing the DRNC for the best cell in the active set.

Source Field

pmNoSystemRabReleaseSpeech

Source Section

IurLink

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

IurLink

rnclId

RNC identity used in the external RNC which the IurLink instance is connected to. { long, Range = 0..4095, Default=Mandatory }

Data Source

Bulk CM

Source Section

IurLink

synchRetransmissions

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

IurLink

synchTimeout

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

IurLink

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

IurLink

LA_RNC Primitive Calculations

The following is a list of primitive calculations for the LA_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

LA_RNC Peg Counts

The following is a list of peg counts for the LA_RNC entity.

att

Indicates to the UE whether IMSI attach/detach is allowed. (Some IMSIs are not allowed in some LAs.) { BooleanVals, Default= TRUE }

Data Source

Bulk CM

Source Section

LocationArea

lac

Location Area Code that identifies a location area. The value must be unique in the RNC, i.e. each Location { long, Range = 1..65533, Default=Mandatory, 65535, }

Data Source

Bulk CM

Source Section

LocationArea

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

LA_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

LA_RNC_WMGeneral

pmCnInitPagingToIdleUeLa

Number of CN-init pages sent to Idle mode UEs in spec LA (Circuit Switched pages).

Data Source

NodeB_RNC_RXI

Source Field

pmCnInitPagingToIdleUeLa

Source Section

LocationArea

reservedBy

Sequence of UtranCells which belongs to the Location Area. { sequence<UtranCell,2304>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

LocationArea

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

LocationArea

t3212

Periodic update timer for LA update. { long, Range = 0..255, Default=10 }

Data Source

Bulk CM

Source Section

LocationArea

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

LocationArea

M3uAssociation_NodeB Primitive Calculations

The following is a list of primitive calculations for the M3uAssociation_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Payload_data_messages_received_per_second

The number of payload data messages received per second

Calculation

$\text{pmNoOfDataMsgRec} / \text{PERLENSEC}$

Payload_data_messages_sent_per_second

The number of payload data messages sent per second

Calculation

$\text{pmNoOfDataMsgSent} / \text{PERLENSEC}$

M3uAssociation_NodeB Peg Counts

The following is a list of peg counts for the M3uAssociation_NodeB entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

M3uAssociation_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

M3uAssociation_NodeB_WMGeneral

pmNoOfAspacAckReceived

The total number of Application Server Process Active (ASPAC) ACK messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspacAckReceived

Source Section

M3uAssociation

pmNoOfAspacAckSent

The total number of ASPAC ACK messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspacAckSent

Source Section

M3uAssociation

pmNoOfAspacReceived

The total number of ASPAC messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspacReceived

Source Section

M3uAssociation

pmNoOfAspacSent

The total number of ASPAC messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspacSent

Source Section

M3uAssociation

pmNoOfAspdnAckReceived

The total number of Application Server Process Down (ASPDN) ACK messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspdnAckReceived

Source Section

M3uAssociation

pmNoOfAspdnAckSent

The total number of ASPDN ACK messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspdnAckSent

Source Section

M3uAssociation

pmNoOfAspdnReceived

The total number of ASPDN messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspdnReceived

Source Section

M3uAssociation

pmNoOfAspdnSent

The total number of ASPDN messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspdnSent

Source Section

M3uAssociation

pmNoOfAspiaAckReceived

The total number of Application Server Process Inactive (ASPIA) ACK messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspiaAckReceived

Source Section

M3uAssociation

pmNoOfAspiaAckSent

The total number of ASPIA ACK messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspiaAckSent

Source Section

M3uAssociation

pmNoOfAspiaReceived

The total number of ASPIA messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspiaReceived

Source Section

M3uAssociation

pmNoOfAspiaSent

The total number of ASPIA messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspiaSent

Source Section

M3uAssociation

pmNoOfAspupAckReceived

The total number of Application Server Process Up (ASPUP) ACK messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspupAckReceived

Source Section

M3uAssociation

pmNoOfAspupAckSent

The total number of ASPUP ACK messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspupAckSent

Source Section

M3uAssociation

pmNoOfAspupReceived

The total number of ASPUP messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspupReceived

Source Section

M3uAssociation

pmNoOfAspupSent

The total number of ASPUP messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfAspupSent

Source Section

M3uAssociation

pmNoOfCommunicationLost

The total number of communication losses.

Data Source

NodeB_RXI

Source Field

pmNoOfCommunicationLost

Source Section

M3uAssociation

pmNoOfCongestion

The total number of congestions.

Data Source

NodeB_RXI

Source Field

pmNoOfCongestion

Source Section

M3uAssociation

pmNoOfDataMsgRec

The total number of DATA (payload data) messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDataMsgRec

Source Section

M3uAssociation

pmNoOfDataMsgSent

The total number of DATA messages sent on the associations related to this signalling point.

Data Source

NodeB_RXI

Source Field

pmNoOfDataMsgSent

Source Section

M3uAssociation

pmNoOfDaudMsgSent

The total number of Destination State Audit (DAUD) messages sent on the associations related to this signalling point.

Data Source

NodeB_RXI

Source Field

pmNoOfDaudMsgSent

Source Section

M3uAssociation

pmNoOfDaudReceived

The total number of DAUD messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDaudReceived

Source Section

M3uAssociation

pmNoOfDavaRec

The total number of Destination Available (DAVA) messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDavaRec

Source Section

M3uAssociation

pmNoOfDavaSent

The total number of DAVA messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDavaSent

Source Section

M3uAssociation

pmNoOfDunaRec

The total number of Destination Unavailable (DUNA) messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDunaRec

Source Section

M3uAssociation

pmNoOfDunaSent

The total number of DUNA messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDunaSent

Source Section

M3uAssociation

pmNoOfDupuRec

The total number of Destination User Part Unavailable (DUPU) messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDupuRec

Source Section

M3uAssociation

pmNoOfDupuSent

The total number of DUPU messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfDupuSent

Source Section

M3uAssociation

pmNoOfErrorMsgRec

The number of ERROR messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfErrorMsgRec

Source Section

M3uAssociation

pmNoOfErrorMsgSent

The total number of ERROR messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfErrorMsgSent

Source Section

M3uAssociation

pmNoOfM3uaDataMsgDiscarded

The total number of discarded M3UA data messages.

Data Source

NodeB_RXI

Source Field

pmNoOfM3uaDataMsgDiscarded

Source Section

M3uAssociation

pmNoOfNotifyMsgRec

The number of NOTIFY messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfNotifyMsgRec

Source Section

M3uAssociation

pmNoOfSconRec

The total number of Signalling Congestion (SCON) messages received through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfSconRec

Source Section

M3uAssociation

pmNoOfSconSent

The total number of SCON messages sent through the association.

Data Source

NodeB_RXI

Source Field

pmNoOfSconSent

Source Section

M3uAssociation

M3uAssociation_RNC Primitive Calculations

The following is a list of primitive calculations for the M3uAssociation_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Payload_data_messages_received_per_second

The number of payload data messages received per second

Calculation

pmNoOfDataMsgRec / PERLENSEC

Payload_data_messages_sent_per_second

The number of payload data messages sent per second

Calculation

pmNoOfDataMsgSent / PERLENSEC

M3uAssociation_RNC Peg Counts

The following is a list of peg counts for the M3uAssociation_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

M3uAssociation_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

M3uAssociation_RNC_WMGeneral

pmNoOfAspacAckReceived

The total number of Application Server Process Active (ASPAC) ACK messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspacAckReceived

Source Section

M3uAssociation

pmNoOfAspacAckSent

The total number of ASPAC ACK messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspacAckSent

Source Section

M3uAssociation

pmNoOfAspacReceived

The total number of ASPAC messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspacReceived

Source Section

M3uAssociation

pmNoOfAspacSent

The total number of ASPAC messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspacSent

Source Section

M3uAssociation

pmNoOfAspdnAckReceived

The total number of Application Server Process Down (ASPDN) ACK messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspdnAckReceived

Source Section

M3uAssociation

pmNoOfAspdnAckSent

The total number of ASPDN ACK messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspdnAckSent

Source Section

M3uAssociation

pmNoOfAspdnReceived

The total number of ASPDN messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspdnReceived

Source Section

M3uAssociation

pmNoOfAspdnSent

The total number of ASPDN messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspdnSent

Source Section

M3uAssociation

pmNoOfAspiaAckReceived

The total number of Application Server Process Inactive (ASPIA) ACK messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspiaAckReceived

Source Section

M3uAssociation

pmNoOfAspiaAckSent

The total number of ASPIA ACK messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspiaAckSent

Source Section

M3uAssociation

pmNoOfAspiaReceived

The total number of ASPIA messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspiaReceived

Source Section

M3uAssociation

pmNoOfAspiaSent

The total number of ASPIA messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspiaSent

Source Section

M3uAssociation

pmNoOfAspupAckReceived

The total number of Application Server Process Up (ASPUP) ACK messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspupAckReceived

Source Section

M3uAssociation

pmNoOfAspupAckSent

The total number of ASPUP ACK messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspupAckSent

Source Section

M3uAssociation

pmNoOfAspupReceived

The total number of ASPUP messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspupReceived

Source Section

M3uAssociation

pmNoOfAspupSent

The total number of ASPUP messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfAspupSent

Source Section

M3uAssociation

pmNoOfCommunicationLost

The total number of communication losses.

Data Source

RNC_RXI

Source Field

pmNoOfCommunicationLost

Source Section

M3uAssociation

pmNoOfCongestion

The total number of congestions.

Data Source

RNC_RXI

Source Field

pmNoOfCongestion

Source Section

M3uAssociation

pmNoOfDataMsgRec

The total number of DATA (payload data) messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDataMsgRec

Source Section

M3uAssociation

pmNoOfDataMsgSent

The total number of DATA messages sent on the associations related to this signalling point.

Data Source

RNC_RXI

Source Field

pmNoOfDataMsgSent

Source Section

M3uAssociation

pmNoOfDaudMsgSent

The total number of Destination State Audit (DAUD) messages sent on the associations related to this signalling point.

Data Source

RNC_RXI

Source Field

pmNoOfDaudMsgSent

Source Section

M3uAssociation

pmNoOfDaudReceived

The total number of DAUD messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDaudReceived

Source Section

M3uAssociation

pmNoOfDavaRec

The total number of Destination Available (DAVA) messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDavaRec

Source Section

M3uAssociation

pmNoOfDavaSent

The total number of DAVA messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDavaSent

Source Section

M3uAssociation

pmNoOfDunaRec

The total number of Destination Unavailable (DUNA) messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDunaRec

Source Section

M3uAssociation

pmNoOfDunaSent

The total number of DUNA messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDunaSent

Source Section

M3uAssociation

pmNoOfDupuRec

The total number of Destination User Part Unavailable (DUPU) messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDupuRec

Source Section

M3uAssociation

pmNoOfDupuSent

The total number of DUPU messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfDupuSent

Source Section

M3uAssociation

pmNoOfErrorMsgRec

The number of ERROR messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfErrorMsgRec

Source Section

M3uAssociation

pmNoOfErrorMsgSent

The total number of ERROR messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfErrorMsgSent

Source Section

M3uAssociation

pmNoOfM3uaDataMsgDiscarded

The total number of discarded M3UA data messages.

Data Source

RNC_RXI

Source Field

pmNoOfM3uaDataMsgDiscarded

Source Section

M3uAssociation

pmNoOfNotifyMsgRec

The number of NOTIFY messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfNotifyMsgRec

Source Section

M3uAssociation

pmNoOfSconRec

The total number of Signalling Congestion (SCON) messages received through the association.

Data Source

RNC_RXI

Source Field

pmNoOfSconRec

Source Section

M3uAssociation

pmNoOfSconSent

The total number of SCON messages sent through the association.

Data Source

RNC_RXI

Source Field

pmNoOfSconSent

Source Section

M3uAssociation

MccService Primitive Calculations

The following is a list of primitive calculations for the MccService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

100.0 * vsum(pmTotalSeizures, -1 * pmUnsuccSeizures) / pmTotalSeizures

MccService Peg Counts

The following is a list of peg counts for the MccService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

MccService_Gen

pmForcedRelease

The total number of forced device releases.

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

MccService

pmNormalRelease

The total number of normal device releases.

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

MccService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

MccService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

MccService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

MediumAccUnit_NodeB Primitive Calculations

The following is a list of primitive calculations for the MediumAccUnit_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

MediumAccUnit_NodeB Peg Counts

The following is a list of peg counts for the MediumAccUnit_NodeB entity.

NodeB_RELEASE

Release

PERLENSEC

Period Length

Source Field

PERLENSEC

Source Section

MediumAccUnit_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

MediumAccUnit_NodeB_WMGeneral

pmNoOfDot3StatsFCSErrors

(Updated Source Section on RP12)Number of frames that did not pass the FCS check.

Source Field

pmNoOfDot3StatsLateCollisions

Source Section

MediumAccessUnit

pmNoOfDot3StatsLateCollisions

(Updated Source Section on RP12)Number times that collision was detected interface after minimum length of a frame.

Source Field

pmNoOfDot3StatsLateCollisions

Source Section

MediumAccessUnit

MediumAccUnit_RNC Primitive Calculations

The following is a list of primitive calculations for the MediumAccUnit_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

MediumAccUnit_RNC Peg Counts

The following is a list of peg counts for the MediumAccUnit_RNC entity.

PERLENSEC

Period Length

Source Field

PERLENSEC

Source Section

MediumAccUnit_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

MediumAccUnit_RNC_WMGeneral

pmNoOfDot3StatsFCSErrors

(Updated Source Field/Section on RP12)Number of frames that did not pass the FCS check.

Source Field

pmNoOfDot3StatsLateCollisions

Source Section

MediumAccessUnit

pmNoOfDot3StatsLateCollisions

(Updated Source Field/Section on RP12)Number times that collision was detected interface after minimum length of a frame.

Source Field

pmNoOfDot3StatsLateCollisions

Source Section

MediumAccessUnit

RNC_RELEASE

Release

MfhService Primitive Calculations

The following is a list of primitive calculations for the MfhService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

MfhService Peg Counts

The following is a list of peg counts for the MfhService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

MfhService_Gen

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

MfhService_Gen

MpcService Primitive Calculations

The following is a list of primitive calculations for the MpcService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentage of Seizures which are sucessful

Calculation

$$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$$

MpcService Peg Counts

The following is a list of peg counts for the MpcService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

MpcService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

MpcService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

MpcService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

MpcService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

MpcService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

MpcService_Gen

Mtp2Tp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp2Tp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Received_MSUs_per_second

Received MSUs per second

Calculation

pmNoOfMSUReceived / PERLENSEC

Mtp2Tp_NodeB Peg Counts

The following is a list of peg counts for the Mtp2Tp_NodeB entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Mtp2Tp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Mtp2Tp_NodeB_WMGeneral

pmLocalSIBTime

The total time of Status Indication Busy (SIB) in the local node.

Data Source

NodeB_RXI

Source Field

pmLocalSIBTime

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfMSUReceived

The total number of MSUs received.

Data Source

NodeB_RXI

Source Field

pmNoOfMSUReceived

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfNacks

The total number of negative acknowledgements received.

Data Source

NodeB_RXI

Source Field

pmNoOfNacks

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfReTransmittedOctets

The total number of re-transmitted octets.

Data Source

NodeB_RXI

Source Field

pmNoOfReTransmittedOctets

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSendBufferOctets

The total number of octets in send buffer.

Data Source

NodeB_RXI

Source Field

pmNoOfSendBufferOctets

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSIOsIFReceived

The total number of Service Information Octet (SIO) & Signal Information Field (SIF) octets received.

Data Source

NodeB_RXI

Source Field

pmNoOfSIOsIFReceived

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSIOsIFTransmitted

The total number of SIO & SIF octets transmitted.

Data Source

NodeB_RXI

Source Field

pmNoOfSIOsIFTransmitted

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfStartedRBCongestion

The total number of started local RB congestions.

Data Source

NodeB_RXI

Source Field

pmNoOfStartedRBCongestion

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSuReceivedInError

The total number of signal units received in error.

Data Source

NodeB_RXI

Source Field

pmNoOfSuReceivedInError

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmRemoteSIBTime

The total time of SIB in a remote node.

Data Source

NodeB_RXI

Source Field

pmRemoteSIBTime

Source Section

Mtp2TpAnsi,Mtp2TpItu

Mtp2Tp_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp2Tp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Received_MSUs_per_second

Received MSUs per second

Calculation

$\text{pmNoOfMSUReceived} / \text{PERLENSEC}$

Mtp2Tp_RNC Peg Counts

The following is a list of peg counts for the Mtp2Tp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Mtp2Tp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

Mtp2Tp_RNC_WMGeneral

pmLocalSIBTime

The total time of Status Indication Busy (SIB) in the local node.

Data Source

RNC_RXI

Source Field

pmLocalSIBTime

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfMSUReceived

The total number of MSUs received.

Data Source

RNC_RXI

Source Field

pmNoOfMSUReceived

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfNacks

The total number of negative acknowledgements received.

Data Source

RNC_RXI

Source Field

pmNoOfNacks

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfReTransmittedOctets

The total number of re-transmitted octets.

Data Source

RNC_RXI

Source Field

pmNoOfReTransmittedOctets

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSendBufferOctets

The total number of octets in send buffer.

Data Source

RNC_RXI

Source Field

pmNoOfSendBufferOctets

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSIOSIFReceived

The total number of Service Information Octet (SIO) & Signal Information Field (SIF) octets received.

Data Source

RNC_RXI

Source Field

pmNoOfSIOSIFReceived

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSIOSIFTransmitted

The total number of SIO & SIF octets transmitted.

Data Source

RNC_RXI

Source Field

pmNoOfSIOSTransmitted

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfStartedRBCongestion

The total number of started local RB congestions.

Data Source

RNC_RXI

Source Field

pmNoOfStartedRBCongestion

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmNoOfSuReceivedInError

The total number of signal units received in error.

Data Source

RNC_RXI

Source Field

pmNoOfSuReceivedInError

Source Section

Mtp2TpAnsi,Mtp2TpItu

pmRemoteSIBTime

The total time of SIB in a remote node.

Data Source

RNC_RXI

Source Field

pmRemoteSIBTime

Source Section

Mtp2TpAnsi,Mtp2TpItu

Mtp3bAp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp3bAp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bAp_NodeB Peg Counts

The following is a list of peg counts for the Mtp3bAp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bAp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bAp_NodeB_WMGeneral

pmNoOfAdjacentSPNotAccessible

Number of Adjacent SPs that are not accessible through direct links.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAdjacentSPNotAccessible

Source Section

Mtp3bAp_NodeB

pmNoOfUserPartUnavailRec

Number of received User Part Unavailable messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUserPartUnavailRec

Source Section

Mtp3bAp_NodeB

Mtp3bAp_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp3bAp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bAp_RNC Peg Counts

The following is a list of peg counts for the Mtp3bAp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bAp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bAp_RNC_WMGeneral

pmNoOfAdjacentSPNotAccessible

Number of Adjacent SPs that are not accessible through direct links.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAdjacentSPNotAccessible

Source Section

Mtp3bAp_RNC

pmNoOfUserPartUnavailRec

Number of received User Part Unavailable messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUserPartUnavailRec

Source Section

Mtp3bAp_RNC

Mtp3bSl_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSl_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSl_NodeB Peg Counts

The following is a list of peg counts for the Mtp3bSl_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSl_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSl_NodeB_WMGeneral

pmNoOfAALINServiceInd

Number of received link-in-service indications.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAALINServiceInd

Source Section

Mtp3bSl_NodeB

pmNoOfAALOUTInd

Number of received link-out-of-service indications.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAALOUTInd

Source Section

Mtp3bSl_NodeB

pmNoOfCBDSent

Number of sent CBD messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCBDSent

Source Section

Mtp3bSl_NodeB

pmNoOfCOOXCOSent

Number of sent change over order (COO/XCO) messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCOOXCOSent

Source Section

Mtp3bSI_NodeB

pmNoOfLocalLinkCongestCeaseRec

Number of local link congestion ceased primitives received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalLinkCongestCeaseRec

Source Section

Mtp3bSI_NodeB

pmNoOfLocalLinkCongestRec

Number of local link congestion primitives received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalLinkCongestRec

Source Section

Mtp3bSI_NodeB

pmNoOfMSURec

Number of received MSUs on this Mtp3bSrs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfMSURec

Source Section

Mtp3bSl_NodeB

pmNoOfMSUSent

Number of sent MSUs on this signaling link.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfMSUSent

Source Section

Mtp3bSl_NodeB

Mtp3bSl_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSl_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSl_RNC Peg Counts

The following is a list of peg counts for the Mtp3bSl_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSl_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSl_RNC_WMGeneral

pmNoOfAALINServiceInd

Number of received link-in-service indications.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAALINServiceInd

Source Section

Mtp3bSI_RNC

pmNoOfAALOUTInd

Number of received link-out-of-service indications.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAALOUTInd

Source Section

Mtp3bSI_RNC

pmNoOfCBDSent

Number of sent CBD messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCBDSent

Source Section

Mtp3bSI_RNC

pmNoOfCOOXCOSent

Number of sent change over order (COO/XCO) messages.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCOOXCOSent

Source Section

Mtp3bSI_RNC

pmNoOfLocalLinkCongestCeaseRec

Number of local link congestion ceased primitives received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalLinkCongestCeaseRec

Source Section

Mtp3bSI_RNC

pmNoOfLocalLinkCongestRec

Number of local link congestion primitives received.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalLinkCongestRec

Source Section

Mtp3bSI_RNC

pmNoOfMSURec

Number of received MSUs on this Mtp3bSrs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfMSURec

Source Section

Mtp3bSI_RNC

pmNoOfMSUSent

Number of sent MSUs on this signaling link.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfMSUSent

Source Section

Mtp3bSI_RNC

Mtp3bSIs_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSIs_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSIs_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSIs_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSp_NodeB Peg Counts

The following is a list of peg counts for the Mtp3bSp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSp_NodeB_WMGeneral

pmNoOfCBARec

The total number of received Changeback Acknowledge (CBA) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfCBARec

Source Section

Mtp3bSpItu

pmNoOfCBASent

The total number of sent CBA messages.

Data Source

NodeB_RXI

Source Field

pmNoOfCBASent

Source Section

Mtp3bSpItu

pmNoOfChangeBackDeclRec

The total number of received Change Back Declaration (CBD) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfChangeBackDeclRec

Source Section

Mtp3bSpItu

pmNoOfChangeOverRec

The total number of received Changeover Order (COO) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfChangeOverRec

Source Section

Mtp3bSpItu

pmNoOfCOAXCARec

The total number of received COA/XCA messages.

Data Source

NodeB_RXI

Source Field

pmNoOfCOAXCAREc

Source Section

Mtp3bSpItu

pmNoOfCOAXCASent

The total number of sent Changeover Acknowledge (COA)/Extended Changeover Acknowledge (XCA) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfCOAXCASent

Source Section

Mtp3bSpItu

pmNoOfControlledRerouteSuccessPerf

The total number of successfully performed controlled reroutings.

Data Source

NodeB_RXI

Source Field

pmNoOfControlledRerouteSuccessPerf

Source Section

Mtp3bSpItu

pmNoOfECAREc

The total number of received ECA messages.

Data Source

NodeB_RXI

Source Field

pmNoOfECARec

Source Section

Mtp3bSpItu

pmNoOfECASent

The total number of sent Emergency Changeover Acknowledge (ECA) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfECASent

Source Section

Mtp3bSpItu

pmNoOfECOSent

The total number of sent ECO messages.

Data Source

NodeB_RXI

Source Field

pmNoOfECOSent

Source Section

Mtp3bSpItu

pmNoOfEmergencyChangeOverRec

The total number of received Emergency Changeover Order (ECO) messages.

Data Source

NodeB_RXI

Source Field

pmNoOfEmergencyChangeOverRec

Source Section

Mtp3bSpItu

pmNoOfForcedRerouteSuccessPerf

The total number of successfully performed forced reroutings.

Data Source

NodeB_RXI

Source Field

pmNoOfForcedRerouteSuccessPerf

Source Section

Mtp3bSpItu

pmNoOfInAssEstReqInStDownWhStEstIsBlck

The number of incoming requests for association establishment when the state on the association is 'DOWN' and establishment of associations is blocked.

Data Source

NodeB_RXI

Source Field

pmNoOfIncomingAssocEstabRequestInStateDownWhenStateEstabIsBlocked

Source Section

Mtp3bSpAnsi

pmNoOfMaxTrialsForAssocActivReached

The number of times that the max limit for trying to activate an association has been reached.

Data Source

NodeB_RXI

Source Field

pmNoOfMaxTrialsForAssocActivReached

Source Section

Mtp3bSpAnsi

pmNoOfMaxTrialsForAssocEstabReached

The number of times that the max limit for trying to establish an association has been reached.

Data Source

NodeB_RXI

Source Field

pmNoOfMaxTrialsForAssocEstabReached

Source Section

Mtp3bSpAnsi

pmNoOfSctpAssociationRestart

The total number of SCTP association restarts.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpAssociationRestart

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfSctpBufOverflow

The total number of SCTP stop sending data.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpBufOverflow

Source Section

Mtp3bSpItu

pmNoOfSctpCommunicationErr

The total number of SCTP communication error.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpCommunicationErr

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfSctpNetworkStatusChange

The total number of SCTP network status changes.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpNetworkStatusChange

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfSctpResumeSending

The total number of SCTP resume sending data.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpResumeSending

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfSctpSendFailure

The total number of SCTP send failure.

Data Source

NodeB_RXI

Source Field

pmNoOfSctpSendFailure

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfSLTAFirstTimeOutRec

The total number of received Signalling Link Test Acknowledge (SLTA) messages for first time out check.

Data Source

NodeB_RXI

Source Field

pmNoOfSLTAFirstTimeOutRec

Source Section

Mtp3bSpItu

pmNoOfSLTASecondTimeOutRec

The total number of received Signalling Link Test Acknowledge (SLTA) messages for second time out check.

Data Source

NodeB_RXI

Source Field

pmNoOfSLTASecondTimeOutRec

Source Section

Mtp3bSpItu

pmNoOfSuccessAssocAbort

The number of successful abortions of signalling associations.

Data Source

NodeB_RXI

Source Field

pmNoOfSuccessAssocAbort

Source Section

Mtp3bSpAnsi

pmNoOfSuccessAssocEstablish

The total number of successful association establishments.

Data Source

NodeB_RXI

Source Field

pmNoOfSuccessAssocEstablish

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfTimerT21WasStarted

The total number of times the timer T21 was started.

Data Source

NodeB_RXI

Source Field

pmNoOfTimerT21WasStarted

Source Section

Mtp3bSpItu

pmNoOfTRARec

The total number of Recieved TRA messages.

Data Source

NodeB_RXI

Source Field

pmNoOfTRARec

Source Section

Mtp3bSpItu

pmNoOfTRASent

The total number of sent TRA messages.

Data Source

NodeB_RXI

Source Field

pmNoOfTRASent

Source Section

Mtp3bSpItu

pmNoOfUnsuccessAssocEstablish

The total number of unsuccessful association establishments.

Data Source

NodeB_RXI

Source Field

pmNoOfUnsuccessAssocEstablish

Source Section

Mtp3bSpItu, Mtp3bSpAnsi

pmNoOfUnsuccessAssocShutDown

(Retired on Utan P6)The number of unsuccessful shutdowns of signalling associations.

Data Source

NodeB_RXI

Source Field

pmNoOfUnsuccessAssocShutDown

Source Section

Mtp3bSpItu

pmNoOfUnsuccessForcedRerouting

The total number of unsuccessfully performed forced reroutings.

Data Source

NodeB_RXI

Source Field

pmNoOfUnsuccessForcedRerouting

Source Section

Mtp3bSpItu

pmNoOfUPMsgDiscardedDueToRoutingErr

The total number of user part messages (MTP_Transfer_Req) discarded due to routing error.

Data Source

NodeB_RXI

Source Field

pmNoOfUPMsgDiscardedDueToRoutingErr

Source Section

Mtp3bSpItu

Mtp3bSp_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSp_RNC Peg Counts

The following is a list of peg counts for the Mtp3bSp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Mtp3bSp_RNC_WMGeneral

pmNoOfCBARec

The total number of received Changeback Acknowledge (CBA) messages.

Data Source

RNC_RXI

Source Field

pmNoOfCBARec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfCBASent

The total number of sent CBA messages.

Data Source

RNC_RXI

Source Field

pmNoOfCBASent

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfChangeBackDeclRec

The total number of received Change Back Declaration (CBD) messages.

Data Source

RNC_RXI

Source Field

pmNoOfChangeBackDeclRec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfChangeOverRec

The total number of received Changeover Order (COO) messages.

Data Source

RNC_RXI

Source Field

pmNoOfChangeOverRec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfCOAXCARec

The total number of received COA/XCA messages.

Data Source

RNC_RXI

Source Field

pmNoOfCOAXCARec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfCOAXCASent

The total number of sent Changeover Acknowledge (COA)/Extended Changeover Acknowledge (XCA) messages.

Data Source

RNC_RXI

Source Field

pmNoOfCOAXCASent

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfControlledRerouteSuccessPerf

The total number of successfully performed controlled reroutings.

Data Source

RNC_RXI

Source Field

pmNoOfControlledRerouteSuccessPerf

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfECARec

The total number of received ECA messages.

Data Source

RNC_RXI

Source Field

pmNoOfECARec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfECASent

The total number of sent Emergency Changeover Acknowledge (ECA) messages.

Data Source

RNC_RXI

Source Field

pmNoOfECASent

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfECOSent

The total number of sent ECO messages.

Data Source

RNC_RXI

Source Field

pmNoOfECOSent

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfEmergencyChangeOverRec

The total number of received Emergency Changeover Order (ECO) messages.

Data Source

RNC_RXI

Source Field

pmNoOfEmergencyChangeOverRec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfForcedRerouteSuccessPerf

The total number of successfully performed forced reroutings.

Data Source

RNC_RXI

Source Field

pmNoOfForcedRerouteSuccessPerf

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfInAssEstReqInStDownWhStEstIsBlck

The number of incoming requests for association establishment when the state on the association is 'DOWN' and establishment of associations is blocked.

Data Source

RNC_RXI

Source Field

pmNoOfIncomingAssocEstabRequestInStateDownWhenStateEstabIsBlocked

Source Section

Mtp3bSpAnsi

pmNoOfMaxTrialsForAssocActivReached

The number of times that the max limit for trying to activate an association has been reached.

Data Source

RNC_RXI

Source Field

pmNoOfMaxTrialsForAssocActivReached

Source Section

Mtp3bSpAnsi

pmNoOfMaxTrialsForAssocEstabReached

The number of times that the max limit for trying to establish an association has been reached.

Data Source

RNC_RXI

Source Field

pmNoOfMaxTrialsForAssocEstabReached

Source Section

Mtp3bSpAnsi

pmNoOfSctpAssociationRestart

The total number of SCTP association restarts.

Data Source

RNC_RXI

Source Field

pmNoOfSctpAssociationRestart

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSctpBufOverflow

The total number of SCTP stop sending data.

Data Source

RNC_RXI

Source Field

pmNoOfSctpBufOverflow

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSctpCommunicationErr

The total number of SCTP communication error.

Data Source

RNC_RXI

Source Field

pmNoOfSctpCommunicationErr

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSctpNetworkStatusChange

The total number of SCTP network status changes.

Data Source

RNC_RXI

Source Field

pmNoOfSctpNetworkStatusChange

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSctpResumeSending

The total number of SCTP resume sending data.

Data Source

RNC_RXI

Source Field

pmNoOfSctpResumeSending

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSctpSendFailure

The total number of SCTP send failure.

Data Source

RNC_RXI

Source Field

pmNoOfSctpSendFailure

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSLTAFirstTimeOutRec

The total number of received Signalling Link Test Acknowledge (SLTA) messages for first time out check.

Data Source

RNC_RXI

Source Field

pmNoOfSLTAFirstTimeOutRec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSLTASecndTimeOutRec

The total number of received Signalling Link Test Acknowledge (SLTA) messages for second time out check.

Data Source

RNC_RXI

Source Field

pmNoOfSLTASecndTimeOutRec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfSuccessAssocAbort

The number of successful abortions of signalling associations.

Data Source

RNC_RXI

Source Field

pmNoOfSuccessAssocAbort

Source Section

Mtp3bSpAnsi

pmNoOfSuccessAssocEstablish

The total number of successful association establishments.

Data Source

RNC_RXI

Source Field

pmNoOfSuccessAssocEstablish

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfTimerT21WasStarted

The total number of times the timer T21 was started.

Data Source

RNC_RXI

Source Field

pmNoOfTimerT21WasStarted

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfTRARec

The total number of Recieved TRA messages.

Data Source

RNC_RXI

Source Field

pmNoOfTRARec

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfTRASent

The total number of sent TRA messages.

Data Source

RNC_RXI

Source Field

pmNoOfTRASent

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfUnsuccessAssocEstablish

The total number of unsuccessful association establishments.

Data Source

RNC_RXI

Source Field

pmNoOfUnsuccessAssocEstablish

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfUnsuccessAssocShutDown

(Retired on Utan P6)The number of unsuccessful shutdowns of signalling associations.

Data Source

RNC_RXI

Source Field

pmNoOfUnsuccessAssocShutDown

Source Section

Mtp3bSpItu

pmNoOfUnsuccessForcedRerouting

The total number of unsuccessfully performed forced reroutings.

Data Source

RNC_RXI

Source Field

pmNoOfUnsuccessForcedRerouting

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

pmNoOfUPMsgDiscardedDueToRoutingErr

The total number of user part messages (MTP_Transfer_Req) discarded due to routing error.

Data Source

RNC_RXI

Source Field

pmNoOfUPMsgDiscardedDueToRoutingErr

Source Section

Mtp3bSpItu,Mtp3bSpAnsi

Mtp3bSrs_NodeB Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSrs_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSrs_NodeB Peg Counts

The following is a list of peg counts for the Mtp3bSrs_NodeB entity.

pmNoOfDiscardedMsgFromBroadToNarrow

The total number of messages discarded from broadband to narrowband.

Data Source

NodeB_RXI

Source Field

pmNoOfDiscardedMsgFromBroadToNarrow

Source Section

Mtp3bSrs

pmNoOfSecsAccRouteSetUnavailable

Number of seconds of route set unavailability accumulated during 30 minutes

Data Source

NodeB_RXI

Source Field

pmNoOfSecsAccRouteSetUnavailable

Source Section

Mtp3bSrs

Mtp3bSrs_RNC Primitive Calculations

The following is a list of primitive calculations for the Mtp3bSrs_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Mtp3bSrs_RNC Peg Counts

The following is a list of peg counts for the Mtp3bSrs_RNC entity.

pmNoOfDiscardedMsgFromBroadToNarrow

The total number of messages discarded from broadband to narrowband.

Data Source

RNC_RXI

Source Field

pmNoOfDiscardedMsgFromBroadToNarrow

Source Section

Mtp3bSrs

pmNoOfSecsAccRouteSetUnavailable

Number of seconds of route set unavailability accumulated during 30 minutes

Data Source

RNC_RXI

Source Field

pmNoOfSecsAccRouteSetUnavailable

Source Section

Mtp3bSrs

NbapCommon Primitive Calculations

The following is a list of primitive calculations for the NbapCommon entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

LocalName

LubLink Name

Calculation

LocalKey

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

NbapCommon Peg Counts

The following is a list of peg counts for the NbapCommon entity.

activeUniSaalTpRef

Reference to the UniSaalTp Managed Object that represents the UNI SAAL termination point for the active MP processor.

Data Source

Bulk CM

Source Field

es:activeUniSaalTpRef

Source Section

NbapCommon

administrativeState

The administrative state of the signalling link. { string, Default= LOCKED }

Data Source

Bulk CM

Source Section

NbapCommon

availabilityStatus

The availability status of the NBAP common signalling bearer. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

NbapCommon

l2EstablishReqRetryT

Time between successive attempts to establish layer 2 assured mode communication. { long, Range = 1..150, Default=5 }

Data Source

Bulk CM

Source Section

NbapCommon

operationalState

The operational state of the NBAP common signalling bearer. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

NbapCommon

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

NbapCommon _WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

PERLENSEC

Source Section

NbapCommon _WMGeneral

pmNoOfDiscardedMsg

(Retired in Utran P6)The number of discarded messages (Changed in UTRAN P6 from MO NbapCommon to MO Iub)

Data Source

NodeB

Source Field

pmNoOfDiscardedMsg

Source Section

NbapCommon

pmNoOfDiscardedNbapMessages

Number of NBAP: Radio Link Setup Messages reject by Admission Control due to UNI-SAAL congestion

Data Source

RNC

Source Field

pmNoOfDiscardedNbapMessages

Source Section

NbapCommon

RNC_RELEASE

Release

Data Source

RNC

Source Section

NbapCommon

standbyUniSaalTpRef

Reference to the UniSaalTp Managed Object that represents the UNI SAAL termination point for the standby MP processor.

Data Source

Bulk CM

Source Field

es:standbyUniSaalTpRef

Source Section

NbapCommon

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

NbapCommon

NniSaalTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the NniSaalTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

NniSaalTp_NodeB Peg Counts

The following is a list of peg counts for the NniSaalTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

NniSaalTp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

NniSaalTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

NniSaalTp_NodeB_WMGeneral

pmLinkInServiceTime

The Acc time in sec the signaling link has been in service

Data Source

NodeB_RNC_RXI

Source Field

pmLinkInServiceTime

Source Section

NniSaalTp_NodeB

pmNoOfAlignmentFailures

Number of alignment or proving failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAlignmentFailures

Source Section

NniSaalTp_NodeB

pmNoOfAllSLFailures

Number of all Signaling link failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAllSLFailures

Source Section

NniSaalTp_NodeB

pmNoOfLocalCongestions

Number of loca cong.This count is incr when sum of SAAL send&retran buff are filled

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalCongestions

Source Section

NniSaalTp_NodeB

pmNoOfNoResponses

Number of no responses detected the last 30 minutes.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfNoResponses

Source Section

NniSaalTp_NodeB

pmNoOfOtherErrors

Number of other list element errors.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOtherErrors

Source Section

NniSaalTp_NodeB

pmNoOfProtocolErrors

Number of unsolicited or inappropriate PDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfProtocolErrors

Source Section

NniSaalTp_NodeB

pmNoOfReceivedSDUs

Number of successfully received SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReceivedSDUs

Source Section

NniSaalTp_NodeB

pmNoOfRemoteCongestions

Number remote cong. This counter increased when remote side gives SAAL no credit.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRemoteCongestions

Source Section

NniSaalTp_NodeB

pmNoOfSentSDUs

Number of successfully sent SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSentSDUs

Source Section

NniSaalTp_NodeB

pmNoOfSequenceDataLosses

Number of data sequences loss.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSequenceDataLosses

Source Section

NniSaalTp_NodeB

pmNoOfUnsuccReTransmissions

Number of unsuccessful retransmissions.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUnsuccReTransmissions

Source Section

NniSaalTp_NodeB

NniSaalTp_RNC Primitive Calculations

The following is a list of primitive calculations for the NniSaalTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

NniSaalTp_RNC Peg Counts

The following is a list of peg counts for the NniSaalTp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

NniSaalTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

NniSaalTp_RNC_WMGeneral

pmLinkInServiceTime

The Acc time (in seconds) the signaling link has been in service

Data Source

NodeB_RNC_RXI

Source Field

pmLinkInServiceTime

Source Section

NniSaalTp_RNC

pmNoOfAlignmentFailures

Number of alignment or proving failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAlignmentFailures

Source Section

NniSaalTp_RNC

pmNoOfAllSLFailures

Number of all Signaling link failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAllSLFailures

Source Section

NniSaalTp_RNC

pmNoOfLocalCongestions

Number of loca cong.This count is incr when sum of SAAL send&retran buff are filled

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalCongestions

Source Section

NniSaalTp_RNC

pmNoOfNoResponses

Number of no responses detected the last 30 minutes.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfNoResponses

Source Section

NniSaalTp_RNC

pmNoOfOtherErrors

Number of other list element errors.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOtherErrors

Source Section

NniSaalTp_RNC

pmNoOfProtocolErrors

Number of unsolicited or inappropriate PDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfProtocolErrors

Source Section

NniSaalTp_RNC

pmNoOfReceivedSDUs

Number of successfully received SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReceivedSDUs

Source Section

NniSaalTp_RNC

pmNoOfRemoteCongestions

Number remote cong. This counter increased when remote side gives SAAL no credit.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRemoteCongestions

Source Section

NniSaalTp_RNC

pmNoOfSentSDUs

Number of successfully sent SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSentSDUs

Source Section

NniSaalTp_RNC

pmNoOfSequenceDataLosses

Number of data sequences loss.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSequenceDataLosses

Source Section

NniSaalTp_RNC

pmNoOfUnsuccReTransmissions

Number of unsuccessful retransmissions.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUnsuccReTransmissions

Source Section

NniSaalTp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

NniSaalTp_RNC

NodeB Primitive Calculations

The following is a list of primitive calculations for the NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vpc_ErrBlock%_Received

Received cell error rate for NodeB. Percentage of forwarded blocks with errors to total received Cells in the virtual path. A healthy value is at most 4×10^{-6} .

Calculation

```
100.0 * (AGGR(TransportNetw_NodeB.AtmPort_NodeB.VplTp_NodeB.VpcTp_NodeB,  
pmFwErrBlocks) /  
(AGGR(TransportNetw_NodeB.AtmPort_NodeB.VplTp_NodeB.VpcTp_NodeB.VclTp_Node  
B, pmReceivedAtmCells)))
```

NodeB Peg Counts

The following is a list of peg counts for the NodeB entity.

accuracy

Last reported value of the phase measurement accuracy. { long, Range = 0..40960000,
Default=40960000, ReadOnly, NonPersistent, NoNotification }

Data Source

Bulk CM

Source Section

NodeSynch

controlFrameT

System constant. { long, Default=200 }

Data Source

Bulk CM

Source Section

NodeSynch

nodeBFunctionIubLink

Fully Distinguished Name of the Iub link object associated with this Node B.

Data Source

Bulk CM

Source Field

un:nodeBFunctionIubLink

Source Section

NodeBFunction

noOfRetries

System constant. { long, Default=3 }

Data Source

Bulk CM

Source Section

NodeSynch

noOfSamples

Number of samples per measurement. { long, Range = 1..10, Default=5 }

Data Source

Bulk CM

Source Section

NodeSynch

phaseDiffThreshold

Threshold for phase measurement. Used for alarm generation in MO NodeSynchTp. { long, Range = 0..10, Default=2 }

Data Source

Bulk CM

Source Section

NodeSynch

phaseMeasurement

0..40960000 { long, Default=40960000, ReadOnly, NonPersistent, NoNotification }

Data Source

Bulk CM

Source Section

NodeSynch

pmNoOfDscMsg

The number of discarded messages

Data Source

NodeB

Source Field

pmNoOfDiscardedMsg

Source Section

Iub

pmTotTmIubLnCongUl

The time in seconds that the Iub link is congested for the NBAP Common part of the control plane in the uplink direction.

Data Source

NodeB

Source Field

pmTotalTimeIubLinkCongestedUl

Source Section

Iub

qEval

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

NodeSynch

reservedBy

Sequence of NodeSynchTp MO references. Indicates all of the NodeSynchTp that are associated with this NodeSynch entity. { sequence<NodeSynchTp,2>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

NodeSynch

supervisionIntervalT

Time between the periodically phase measurements of the RBS. { long, Range = 0..1440, Default=15 }

Data Source

Bulk CM

Source Section

NodeSynch

timeStamp

Time stamp for the last reported value of the phase measurement and associated accuracy. { string, LengthRange = 0,19, Default= "", ReadOnly, NonPersistent, NoNotification }

Data Source

Bulk CM

Source Section

NodeSynch

userLabel

A user-friendly (and user assigned) name of the associated object.

Data Source

Bulk CM

Source Field

un:userLabel

Source Section

NodeBFunction

userLabel_CM

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

NodeSynch

NrService Primitive Calculations

The following is a list of primitive calculations for the NrService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentage of Seizures which are sucessful

Calculation

100.0 * vsum(pmTotalSeizures, -1 * pmUnsuccSeizures) / pmTotalSeizures

NrService Peg Counts

The following is a list of peg counts for the NrService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

NrService_Gen

pmForcedRelease

Total Number of forced device releases for ex due to spontaneous device fault

Data Source

RNC_RXI

Source Field

pmForcedRelease

Source Section

NrService

pmNormalRelease

Total Number of normal device releases

Data Source

RNC_RXI

Source Field

pmNormalRelease

Source Section

NrService

pmTotalSeizures

The total number of seizure attempt of devices from this device Service.

Data Source

RNC_RXI

Source Field

pmTotalSeizures

Source Section

NrService

pmUnsuccSeizures

The total number of failed seizure attempts due to congestion.

Data Source

RNC_RXI

Source Field

pmUnsuccSeizures

Source Section

NrService

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

NrService_Gen

Os155PhyPathTrm_NodeB Primitive Calculations

The following is a list of primitive calculations for the Os155PhyPathTrm_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errorred_Ratio_Multiplexer_NodeB

In standards (G.826) Number of errored seconds for the Multiplexer Section (MS) Ratio

Calculation

pmMsEs / PERLENSEC

Os155PhyPathTrm_NodeB Peg Counts

The following is a list of peg counts for the Os155PhyPathTrm_NodeB entity.

NodeB_RELEASE

Release

PERLENSEC

Period Length

Source Field

PERLENSEC

Source Section

Os155PhyPathTrm_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

Os155PhyPathTrm_NodeB_WMGeneral

pmMsBbe

Transmission Background Block Errors (BBE).

Data Source

NodeB_RXI

Source Field

pmMsBbe

Source Section

Os155SpiTtp

pmMsEs

Number of errored seconds for the Multiplexer Section (MS).

Source Field

pmMsEs

Source Section

Os155SpiTtp,Os155PhysPathTerm

pmMsSes

Number of severely errored seconds for the Multiplexer Section (MS).

Source Field

pmMsSes

Source Section

Os155SpiTtp,Os155PhysPathTerm

pmMsUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

NodeB_RXI

Source Field

pmMsUas

Source Section

Os155SpiTtp

pmVc4Es

Number of errored seconds for the Virtual Container 4 (VC4).

Source Field

pmVc4Es

Source Section

Os155SpiTtp,Os155PhysPathTerm

pmVc4Ses

Number of severely errored seconds for the Virtual Container 4 (VC4).

Source Field

pmVc4Ses

Source Section

Os155SpiTtp,Os155PhysPathTerm

Os155PhyPathTrm_RNC Primitive Calculations

The following is a list of primitive calculations for the Os155PhyPathTrm_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Phy_Errorred_Ratio_Multiplexer_RNC

In standards (G.826) Number of errored seconds for the Multiplexer Section (MS) Ratio

Calculation

pmMsEs / PERLENSEC

Os155PhyPathTrm_RNC Peg Counts

The following is a list of peg counts for the Os155PhyPathTrm_RNC entity.

PERLENSEC

Period Length

Source Field

PERLENSEC

Source Section

Os155PhyPathTrm_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

Os155PhyPathTrm_RNC_WMGeneral

pmMsBbe

Transmission Background Block Errors (BBE).

Data Source

RNC_RXI

Source Field

pmMsBbe

Source Section

Os155SpiTtp

pmMsEs

Number of errored seconds for the Multiplexer Section (MS).

pmMsSes

Number of severely errored seconds for the Multiplexer Section (MS).

pmMsUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

RNC_RXI

Source Field

pmMsUas

Source Section

Os155SpiTtp

RNC_RELEASE

Release

Ospf_NodeB Primitive Calculations

The following is a list of primitive calculations for the Ospf_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Ospf_NodeB Peg Counts

The following is a list of peg counts for the Ospf_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Ospf_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ospf_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ospf_NodeB_WMGeneral

pmNoOfOspfOriginateNewLsas

The Number of new link-state advertisements that have been originated

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfOriginateNewLsas

Source Section

Ospf_NodeB

pmNoOfOspfRxNewLsas

The Number of link-state advertisement received determined to be new instantiations

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfRxNewLsas

Source Section

Ospf_NodeB

Ospf_RNC Primitive Calculations

The following is a list of primitive calculations for the Ospf_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Ospf_RNC Peg Counts

The following is a list of peg counts for the Ospf_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ospf_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Ospf_RNC_WMGeneral

pmNoOfOspfOriginateNewLsas

The Number of new link-state advertisements that have been originated

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfOriginateNewLsas

Source Section

Ospf_RNC

pmNoOfOspfRxNewLsas

The Number of link-state advertisement received determined to be new instantiations

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfRxNewLsas

Source Section

Ospf_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Ospf_RNC

OspfArea_NodeB Primitive Calculations

The following is a list of primitive calculations for the OspfArea_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

OspfArea_NodeB Peg Counts

The following is a list of peg counts for the OspfArea_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

OspfArea_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfArea_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfArea_NodeB_WMGeneral

pmNoOfOspfSpfRuns

The Number of times that the intra-area route table been calc using linkstate db

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfSpfRuns

Source Section

OspfArea_NodeB

OspfArea_RNC Primitive Calculations

The following is a list of primitive calculations for the OspfArea_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

OspfArea_RNC Peg Counts

The following is a list of peg counts for the OspfArea_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfArea_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfArea_RNC_WMGeneral

pmNoOfOspfSpfRuns

The Number of times that the intra-area route table been calc using linkstate db

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfSpfRuns

Source Section

OspfArea_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

OspfArea_RNC

OspfInterface_NodeB Primitive Calculations

The following is a list of primitive calculations for the OspfInterface_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

OspfInterface_NodeB Peg Counts

The following is a list of peg counts for the OspfInterface_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

OspfInterface_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfInterface_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfInterface_NodeB_WMGeneral

pmNoOfOspfIfEvents

Number times this OSPF interface has changed its state or an error has occurred.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfIfEvents

Source Section

OspfInterface_NodeB

OspfInterface_RNC Primitive Calculations

The following is a list of primitive calculations for the OspfInterface_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

OspfInterface_RNC Peg Counts

The following is a list of peg counts for the OspfInterface_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfInterface_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

OspfInterface_RNC_WMGeneral

pmNoOfOspfIfEvents

Number times this OSPF interface has changed its state, or an error has occurred.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOspfIfEvents

Source Section

OspfInterface_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

OspfInterface_RNC

PacketDataRouter Primitive Calculations

The following is a list of primitive calculations for the PacketDataRouter entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PacketDataRouter Peg Counts

The following is a list of peg counts for the PacketDataRouter entity.

administrativeState

The administrative state of the Packet Data Router. { string, Default= UNLOCKED }

Data Source

Bulk CM

Source Section

PacketDataRouter

availabilityStatus

The availability status of the Packet Data Router. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

PacketDataRouter

operationalState

The operational state of the Packet Data Router. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

PacketDataRouter

pdrDeviceRef

Reference to the PdrDevice Managed Object that is used by the PacketDataRouter. { PdrDevice, Default= empty, ReadOnly, NoNotification}

Data Source

Bulk CM

Source Section

PacketDataRouter

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

PacketDataRouter_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

PacketDataRouter_WMGeneral

pmNoFaultyIpPackets

Number of faulty packets.

Data Source

NodeB_RNC_RXI

Source Field

pmNoFaultyIpPackets

Source Section

PacketDataRouter

pmNoRoutedIpBytesDl

Number of routed user IP bytes in the downlink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRoutedIpBytesDl

Source Section

PacketDataRouter

pmNoRoutedIpBytesUl

Number of routed user IP bytes in the uplink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRoutedIpBytesUl

Source Section

PacketDataRouter

pmNoRoutedIpPacketsDl

Number of routed user IP packets in the downlink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRoutedIpPacketsDI

Source Section

PacketDataRouter

pmNoRoutedIpPacketsUI

Number of routed user IP packets in the uplink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRoutedIpPacketsUI

Source Section

PacketDataRouter

pmSamplesPacketDataRab

Number samples rec within ROP "Number of packet data RABs" for each Packet Data Router.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesPacketDataRab

Source Section

PacketDataRouter

pmSumPacketDataRab

Sum sample values rec for "Number of packet data RABs" (per Packet Data Router).

Data Source

NodeB_RNC_RXI

Source Field

pmSumPacketDataRab

Source Section

PacketDataRouter

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

PacketDataRouter

timeToLive

Time-to-live value assigned to uplink traffic IP header. { long, Range = 0..255, Default=20 }

Data Source

Bulk CM

Source Section

PacketDataRouter

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

PacketDataRouter

PacketDataRouter_RNC Primitive Calculations

The following is a list of primitive calculations for the PacketDataRouter_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

PacketDataRouter_RNC Peg Counts

The following is a list of peg counts for the PacketDataRouter_RNC entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

pmNoFaultyIpPackets

Number of faulty packets.

Data Source

RNC

Source Field

pmNoFaultyIpPackets

Source Section

PacketDataRouter

pmNoRoutedIpBytesDl

Number of routed user IP bytes in the downlink.

Data Source

RNC

Source Field

pmNoRoutedIpBytesDl

Source Section

PacketDataRouter

pmNoRoutedIpBytesUl

Number of routed user IP bytes in the uplink.

Data Source

RNC

Source Field

pmNoRoutedIpBytesUl

Source Section

PacketDataRouter

pmNoRoutedIpPacketsDl

Number of routed user IP packets in the downlink.

Data Source

RNC

Source Field

pmNoRoutedIpPacketsDl

Source Section

PacketDataRouter

pmNoRoutedIpPacketsUl

Number of routed user IP packets in the uplink.

Data Source

RNC

Source Field

pmNoRoutedIpPacketsUl

Source Section

PacketDataRouter

pmSamplesPacketDataRab

Number samples rec within ROP "Number of packet data RABs" for each Packet Data Router.

Data Source

RNC

Source Field

pmSamplesPacketDataRab

Source Section

PacketDataRouter

pmSumPacketDataRab

Sum sample values rec for "Number of packet data RABs" (per Packet Data Router).

Data Source

RNC

Source Field

pmSumPacketDataRab

Source Section

PacketDataRouter

PdrDevice Primitive Calculations

The following is a list of primitive calculations for the PdrDevice entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

PdrDevice Peg Counts

The following is a list of peg counts for the PdrDevice entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

pmSamplesMeasuredPdrSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the PDR SP".

Data Source

RNC

Source Field

pmSamplesMeasuredPdrSpLoad

Source Section

PdrDevice

pmSumMeasuredPdrSpLoad

Sum of all sample values recorded for "Level of the averaged measured load on the PDR SP"

Data Source

RNC

Source Field

pmSumMeasuredPdrSpLoad

Source Section

PdrDevice

PdrDevice_NodeB Primitive Calculations

The following is a list of primitive calculations for the PdrDevice_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PdrDevice_NodeB Peg Counts

The following is a list of peg counts for the PdrDevice_NodeB entity.

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

PdrDevice_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

PdrDevice_NodeB_WMGeneral

pmSamplesMeasuredPdrSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the PDR SP".

Data Source

RNC

Source Field

pmSamplesMeasuredPdrSpLoad

Source Section

PdrDevice

pmSumMeasuredPdrSpLoad

Sum of all sample values recorded for "Level of the averaged measured load on the PDR SP"

Data Source

RNC

Source Field

pmSumMeasuredPdrSpLoad

Source Section

PdrDevice

RNC_RELEASE

Release

Data Source

NodeB_RXI

Source Section

PdrDevice_NodeB

PdrDevice_RNC Primitive Calculations

The following is a list of primitive calculations for the PdrDevice_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PdrDevice_RNC Peg Counts

The following is a list of peg counts for the PdrDevice_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

PdrDevice_RNC_WMGeneral

pmSamplesMeasuredPdrSpLoad

Number of samples recorded within the ROP period for "Level of the averaged measured load on the PDR SP".

Data Source

RNC

Source Field

pmSamplesMeasuredPdrSpLoad

Source Section

PdrDevice

pmSumMeasuredPdrSpLoad

Sum of all sample values recorded for "Level of the averaged measured load on the PDR SP"

Data Source

RNC

Source Field

pmSumMeasuredPdrSpLoad

Source Section

PdrDevice

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

PdrDevice_RNC

PlugInUnit_NodeB Primitive Calculations

The following is a list of primitive calculations for the PlugInUnit_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PlugInUnit_NodeB Peg Counts

The following is a list of peg counts for the PlugInUnit_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

PlugInUnit_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

PlugInUnit_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

PlugInUnit_NodeB_WMGeneral

pmProcessorLoad

This states CPU load based Operating System Enea (OSE) function. Value stated %.

Data Source

NodeB_RNC_RXI

Source Field

pmProcessorLoad

Source Section

PlugInUnit_NodeB

PlugInUnit_RNC Primitive Calculations

The following is a list of primitive calculations for the PlugInUnit_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PlugInUnit_RNC Peg Counts

The following is a list of peg counts for the PlugInUnit_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

PlugInUnit_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

PlugInUnit_RNC_WMGeneral

pmProcessorLoad

This states CPU load based Operating System Enea (OSE) function. Value stated %.

Data Source

NodeB_RNC_RXI

Source Field

pmProcessorLoad

Source Section

PlugInUnit_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

PlugInUnit_RNC

PostServClass Primitive Calculations

The following is a list of primitive calculations for the PostServClass entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

PostServClass Peg Counts

The following is a list of peg counts for the PostServClass entity.

PERLENSEC

Period Length

Data Source

RNC

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

pmAgpsAttempt

The counter is stepped when an A_GPS positioning attempt is started. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmAgpsAttempt

Source Section

PositioningServiceClass

pmAgpsSuccQoSNotOk

The counter is stepped when an A-GPS positioning attempt is successfully completed, with a QoS that Does not meet the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmAgpsSuccQoSNotOk

Source Section

PositioningServiceClass

pmAgpsSuccQosOk

The counter is stepped when an A-GPS Positioning attempt is successfully completed, with a QoS that meets the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmAgpsSuccQosOk

Source Section

PositioningServiceClass

pmCellIdAttempt

The counter is stepped when a cell ID positioning attempt is started. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmCellIdAttempt

Source Section

PositioningServiceClass

pmCellIdSuccQosNotOk

The counter is stepped when a cell ID positioning attempt is successfully completed, with a QoS that does not meet the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmCellIdSuccQosNotOk

Source Section

PositioningServiceClass

pmCellIdSuccQosOk

The counter is stepped when a cell ID positioning attempt is successfully completed, with a QoS that meets the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmCellIdSuccQosOk

Source Section

PositioningServiceClass

pmRttAttempt

The counter is stepped when an RTT positioning attempt is started. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmRttAttempt

Source Section

PositioningServiceClass

pmRttSuccQosNotOk

The counter is stepped when an RTT positioning attempt is successfully completed, with a QoS that does not meet the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmRttSuccQosNotOk

Source Section

PositioningServiceClass

pmRttSuccQosOk

The counter is stepped when an RTT positioning attempt is successfully completed, with a QoS that meets the requested QoS. Note: There are three instances of this counter, one for each of the service classes EMERGENCY_CLASS, COMMERCIAL_CLASS_1 and COMMERCIAL_CLASS_2.

Data Source

RNC

Source Field

pmRttSuccQosOk

Source Section

PositioningServiceClass

Prach Primitive Calculations

The following is a list of primitive calculations for the Prach entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Prach Peg Counts

The following is a list of peg counts for the Prach entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Prach

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Prach_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

Prach_WMGeneral

pmNoPreambleFalseDetection

The number of false detections due to noise on the Random Access Channel (RACH), per GP

Data Source

NodeB_RNC_RXI

Source Field

pmNoPreambleFalseDetection

Source Section

Prach

pmPropagationDelay_00

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples with maximum delay in number of chips, 0..2562 chips.

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_01

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 0%..1%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_02

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 1%..2%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_03

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 2%..3%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_04

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 3%..4%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_05

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 4%..5%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_06

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 5%..6%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_07

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 6%..7%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_08

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 7%..8%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_09

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 8%..9%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_10

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 9%..10%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_11

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 10%..12%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_12

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 12%..14%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_13

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 14%..16%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_14

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 16%..18%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_15

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 18%..20%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_16

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 20%..22%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_17

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 22%..24%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_18

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 24%..26%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_19

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 26%..28%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_20

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 28%..30%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_21

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 30%..33%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_22

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 33%..36%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_23

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 36%..39%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_24

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 39%..42%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_25

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 42%..45%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_26

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 45%..48%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_27

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 48%..51%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_28

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 51%..54%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_29

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 54%..57%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_30

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 57%..60%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_31

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 60%..64%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_32

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 64%..68%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_33

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 68%..72%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_34

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 72%..76%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_35

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 76%..80%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_36

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 80%..84%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_37

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 84%..88%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_38

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 88%..92%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_39

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 92%..96%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmPropagationDelay_40

Propagation delay for the Cell. Propagation delay is measured on RACH messages with correct CRC. A sample is taken from each detected preamble with succesful detected message. Number of samples in range 96%..100%

Data Source

NodeB

Source Field

pmPropagationDelay

Source Section

Prach

pmReceivedPreambleSir_00

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-26, -25]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_01

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-25, -24]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_02

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-24, -23]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_03

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-23, -22]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_04

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-22, -21]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_05

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-21, -20]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_06

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-20, -19]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_07

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-19, -18]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_08

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-18, -17]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_09

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-17, -16]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_10

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-16, -15]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_11

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-15, -14]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_12

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-14, -13]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_13

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-13, -12]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_14

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-12, -11]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_15

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-11, -10]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_16

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-10, -9]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_17

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-9, -8]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_18

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-8, -7]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_19

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-7, -6]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_20

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-6, -5]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_21

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-5, -4]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_22

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-4, -3]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_23

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-3, -2]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_24

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-2, -1]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_25

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [-1, 0]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmReceivedPreambleSir_26

The Signal-to-Interference Ratio (SIR) of all access attempts above the preamble threshold (except false detection) on the Random Access Channel (RACH), per GP in the range of [0, rest]db

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedPreambleSir

Source Section

Prach

pmSuccReceivedBlocks

Number of successfully received transport blocks

Data Source

NodeB_RNC_RXI

Source Field

pmSuccReceivedBlocks

Source Section

Prach

pmUnsuccReceivedBlocks

Number of unsuccessfully received transport blocks

Data Source

NodeB_RNC_RXI

Source Field

pmUnsuccReceivedBlocks

Source Section

Prach

RA_RNC Primitive Calculations

The following is a list of primitive calculations for the RA_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

RA_RNC Peg Counts

The following is a list of peg counts for the RA_RNC entity.

nmo

Network operation mode that indicates whether the Gs interface between the SGSN and MSC/VLR is installed. { string, Default= MODE_II }

Data Source

Bulk CM

Source Section

RoutingArea

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RA_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RA_RNC_WMGeneral

pmCnInitPagingToIdleUeRa

Number of CN-init pages sent to Idle mode UEs in spec RA (Packet Switched pages).

Data Source

NodeB_RNC_RXI

Source Field

pmCnInitPagingToIdleUeRa

Source Section

RoutingArea

rac

Routing Area Code of a routing area. An RA is used by UTRAN to page mobiles on request from the PS CN. { long, Range = 0..255, Default=Mandatory }

Data Source

Bulk CM

Source Section

RoutingArea

reservedBy

Sequence of UtranCell MO references which belongs to the RA. { sequence<UtranCell,2304>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

RoutingArea

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

RoutingArea

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

RoutingArea

RABType Primitive Calculations

The following is a list of primitive calculations for the RABType entity.

Avr_PS_RAB_STBL_SUCC_RATE

Percentage of total number of currently active RABs to samples recorded within the ROP for number of RABs established.

Calculation

`100.0 * pmSumRabEstablish / pmSamplesRabEstablish`

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

k_PAYLOAD_DL_TOT

DL Total payload traffic (Mbit), derived from FACH payload + DCH payload before diversity split.

Calculation

```
vsum((1.0 * pmDlFachTrafficVolume) / 1024, (1.0 * pmDlDchTrafficVolumeBeforeSplit) / 1024)
```

k_PAYLOAD_UL_TOT

UL Total payload traffic (Mbit), derived from RACH payload + DCH payload after diversity combining.

Calculation

```
vsum((1.0 * pmUlRachTrafficVolume) / 1024, (1.0 * pmUlDchTrafficVolumeAfterComb) / 1024)
```

k_RAB_EST_FAIL

Number of RAB Establishment failures

Calculation

```
vsum(pmNoRabEstablishAttempts, -1.0 * pmNoRabEstablishSuccess)
```

k_RAB_EST_FAIL_RATE

RAB Establishment failure rate %

Calculation

```
(pmNoRabEstablishAttempts - pmNoRabEstablishSuccess) * 100.0 / pmNoRabEstablishAttempts
```

k_RAB_REL_FAIL

Number of failed RAB releases

Calculation

```
vsum(pmNoRabReleaseAttempts, -1 * pmNoRabReleaseSuccess)
```

k_RAB_REL_FAIL_RATE

RAB release failure rate %

Calculation

$100.0 * \text{vsum}(\text{pmNoRabReleaseAttempts}, -1.0 * \text{pmNoRabReleaseSuccess}) / \text{pmNoRabReleaseAttempts}$

NUMDAYS

of days in Report

Calculation

$\text{DAYSINREPORT}()$

NUMHOURS

of hours in Summation Data

Calculation

Uplink_BLER

The transport block error rate after combining in uplink

Calculation

$100.0 * \text{pmFaultyTransportBlocksAcUl} / \text{pmTransportBlocksAcUl}$

Uplink_PS_Streaming_BLER

Transport block error rate after combining at RNC in uplink for PS streaming (UeRc = 13).

Calculation

$100.0 * (\text{pmFaultyTransportBlocksAcUl} / \text{pmTransportBlocksAcUl})$

Uplink_Speech_BLER

The transport block error rate after combining at RNC in uplink for speech (UeRc = 2).

Calculation

$100.0 * \text{pmFaultyTransportBlocksAcUl} / \text{pmTransportBlocksAcUl}$

RABType Peg Counts

The following is a list of peg counts for the RABType entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UeRc_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

UeRc_WMGeneral

pmDlDchTrafficVolumeBeforeSplit

Payload traff DL in kbits on dedicated chan (DCH). Before Diversity Split.

Data Source

NodeB_RNC_RXI

Source Field

pmDlDchTrafficVolumeBeforeSplit

Source Section

UeRc

pmDlFachTrafficVolume

Payload traffic downlink in kbits on common channels (FACH).

Data Source

NodeB_RNC_RXI

Source Field

pmDlFachTrafficVolume

Source Section

UeRc

pmFaultyTransportBlocksAcUl

Number of faulty uplink DCH transport blocks for this RAB type after combining.

Data Source

NodeB_RNC_RXI

Source Field

pmFaultyTransportBlocksAcUl

Source Section

UeRc

pmNoRabEstablishAttempts

Number of RAB establishment attempts.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishAttempts

Source Section

UeRc

pmNoRabEstablishSuccess

Number of successful RAB establishments.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishSuccess

Source Section

UeRc

pmNoRabReleaseAttempts

Number of RAB release attempts.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabReleaseAttempts

Source Section

UeRc

pmNoRabReleaseSuccess

Number of successful RAB releases.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabReleaseSuccess

Source Section

UeRc

pmSamplesRabEstablish

Number of samples recorded within the ROP for Number of RABs established.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesRabEstablish

Source Section

UeRc

pmSumRabEstablish

Sum of all sample values recorded for Number of RABs established.

Data Source

NodeB_RNC_RXI

Source Field

pmSumRabEstablish

Source Section

UeRc

pmTransportBlocksAcUI

Number of uplink DCH transport blocks for this RAB type after combining.

Data Source

NodeB_RNC_RXI

Source Field

pmTransportBlocksAcUI

Source Section

UeRc

pmUIDchTrafficVolumeAfterComb

Payload traff uplink in kbits on dedicated chan (DCH). After diversity comb.

Data Source

NodeB_RNC_RXI

Source Field

pmUIDchTrafficVolumeAfterComb

Source Section

UeRc

pmUIRachTrafficVolume

Payload traffic uplink in kbits on common channels (RACH).

Data Source

NodeB_RNC_RXI

Source Field

pmUIRachTrafficVolume

Source Section

UeRc

reservedBy

System constant. { Default=empty, Default= NoNotification, ReadOnly, }

Data Source

Bulk CM

Source Section

UeRc

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

UeRc

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

UeRc

RACH Primitive Calculations

The following is a list of primitive calculations for the RACH entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

RACH Peg Counts

The following is a list of peg counts for the RACH entity.

administrativeState

The administrative state of the channel. { string, Default= UNLOCKED }

Data Source

Bulk CM

Source Section

Rach

aichPower

AICH power, to be used for transmitting on AICH, relative to the primaryCpichPower value. { long, Range = -22..5, Default=-6 }

Data Source

Bulk CM

Source Section

Rach

aichTransmissionTiming

AICH timing delay parameter.Changing this attribute may affect traffic. { long, Range = 3..4, Default=4 }

Data Source

Bulk CM

Source Section

Rach

availabilityStatus

The availability status of the channel. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Rach

constantValueCprach

Constant value used by the UE to calculate the initial power on PRACH according to the Open loop power control procedure. { long, Range = -35..-10, Default=-27 }

Data Source

Bulk CM

Source Section

Rach

maxPreambleCycle

Maximum number of preamble ramping cycle. { long, Range = 1..32, Default=4 }

Data Source

Bulk CM

Source Section

Rach

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

Rach

operationalState

The operational state of the channel. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Rach

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

Rach_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

Rach_WMGeneral

pmFaultyTransportBlocks

Total number of faulty RACH transport blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFaultyTransportBlocks

Source Section

Rach

pmNoRecRandomAccSuccess

Number of successfully received frames on the RACH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRecRandomAccSuccess

Source Section

Rach

pmTransportBlocks

Total number of RACH transport blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmTransportBlocks

Source Section

Rach

powerOffsetP0

Power step when no acquisition indicator is received. { long, Range = 1..8, Default=3 }

Data Source

Bulk CM

Source Section

Rach

powerOffsetPpm

Power step between preamble and the message part. { long, Range = -5..10, Default=-4 }

Data Source

Bulk CM

Source Section

Rach

preambleRetransMax

Maximum number of preambles in one preamble ramping cycle. { long, Range = 1..64, Default=8 }

Data Source

Bulk CM

Source Section

Rach

preambleSignatures

Preamble signatures for PRACH. { long, Range = 1..65535, Default=65535 }

Data Source

Bulk CM

Source Section

Rach

preambleThreshold

System constant. { long, Default=34 }

Data Source

Bulk CM

Source Section

Rach

scramblingCodeWordNo

Scrambling Code for preamble and message part. (PRACH parameter) { long, Range = 0..15, Default=0 }

Data Source

Bulk CM

Source Section

Rach

spreadingFactor

Minimum spreading factor to use for PRACH. { long, Range = 32, Default=64, 64, }

Data Source

Bulk CM

Source Section

Rach

subChannelNo

One or more sub channel numbers can be active. The rightmost bit (bit 0) in the Corba data type long corresponds to sub channel no 0, bit 1 corresponds to subchannel no 1 and so on, however not that bit 0 is the leftmost bit in the ASN.1 type bitstring. { long, Range = 1..4095, Default=4095 }

Data Source

Bulk CM

Source Section

Rach

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

Rach

RadioLinks Primitive Calculations

The following is a list of primitive calculations for the RadioLinks entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

pmAverageSirErrorP5MD_01

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -10.0 to -9.5 dB

Calculation

pmAverageSirError_03

pmAverageSirErrorP5MD_02

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -9.5 to -9.0 dB

Calculation

pmAverageSirError_04

pmAverageSirErrorP5MD_03

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -9.0 to -8.5 dB

Calculation

pmAverageSirError_05

pmAverageSirErrorP5MD_04

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -8.5 to -8.0 dB

Calculation

pmAverageSirError_06

pmAverageSirErrorP5MD_05

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -8.0 to -7.5 dB

Calculation

pmAverageSirError_07

pmAverageSirErrorP5MD_06

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -7.5 to -7.0 dB

Calculation

pmAverageSirError_08

pmAverageSirErrorP5MD_07

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -7.0 to -6.5 dB

Calculation

pmAverageSirError_09

pmAverageSirErrorP5MD_08

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -6.5 to -6.0 dB

Calculation

pmAverageSirError_10

pmAverageSirErrorP5MD_09

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -6.0 to -5.5 dB

Calculation

pmAverageSirError_11

pmAverageSirErrorP5MD_10

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -5.5 to -5.0 dB

Calculation

pmAverageSirError_12

pmAverageSirErrorP5MD_11

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -5.0 to -4.5 dB

Calculation

pmAverageSirError_13

pmAverageSirErrorP5MD_12

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -4.5 to -4.0 dB

Calculation

pmAverageSirError_14

pmAverageSirErrorP5MD_13

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -4.0 to -3.5 dB

Calculation

pmAverageSirError_15

pmAverageSirErrorP5MD_14

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted

per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -3.5 to -3.0 dB

Calculation

pmAverageSirError_16

pmAverageSirErrorP5MD_15

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -3.0 to -2.5 dB

Calculation

pmAverageSirError_17

pmAverageSirErrorP5MD_16

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -2.5 to -2.0 dB

Calculation

pmAverageSirError_18

pmAverageSirErrorP5MD_17

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -2.0 to -1.5 dB

Calculation

pmAverageSirError_19

pmAverageSirErrorP5MD_18

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -1.5 to -1.0 dB

Calculation

pmAverageSirError_20

pmAverageSirErrorP5MD_19

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -1.0 to -0.5 dB

Calculation

pmAverageSirError_21

pmAverageSirErrorP5MD_20

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range -0.5 to 0.0 dB

Calculation

pmAverageSirError_22

pmAverageSirErrorP5MD_21

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 0.0 to 0.5 dB

Calculation

pmAverageSirError_23

pmAverageSirErrorP5MD_22

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 0.5 to 1.0 dB

Calculation

pmAverageSirError_24

pmAverageSirErrorP5MD_23

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 1.0 to 1.5 dB

Calculation

pmAverageSirError_25

pmAverageSirErrorP5MD_24

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 1.5 to 2.0 dB

Calculation

pmAverageSirError_26

pmAverageSirErrorP5MD_25

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 2.0 to 2.5 dB

Calculation

pmAverageSirError_27

pmAverageSirErrorP5MD_26

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 2.5 to 3.0 dB

Calculation

pmAverageSirError_28

pmAverageSirErrorP5MD_27

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 3.0 to 3.5 dB

Calculation

pmAverageSirError_29

pmAverageSirErrorP5MD_28

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted

per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 3.5 to 4.0 dB

Calculation

pmAverageSirError_30

pmAverageSirErrorP5MD_29

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 4.0 to 4.5 dB

Calculation

pmAverageSirError_31

pmAverageSirErrorP5MD_30

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 4.5 to 5.0 dB

Calculation

pmAverageSirError_32

pmAverageSirErrorP5MD_31

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 5.0 to 5.5 dB

Calculation

pmAverageSirError_33

pmAverageSirErrorP5MD_32

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 5.5 to 6.0 dB

Calculation

pmAverageSirError_34

pmAverageSirErrorP5MD_33

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 6.0 to 6.5 dB

Calculation

pmAverageSirError_35

pmAverageSirErrorP5MD_34

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 6.5 to 7.0 dB

Calculation

pmAverageSirError_36

pmAverageSirErrorP5MD_35

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 7.0 to 7.5 dB

Calculation

pmAverageSirError_37

pmAverageSirErrorP5MD_36

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 7.5 to 8.0 dB

Calculation

pmAverageSirError_38

pmAverageSirErrorP5MD_37

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 8.0 to 8.5 dB

Calculation

pmAverageSirError_39

pmAverageSirErrorP5MD_38

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 8.5 to 9.0 dB

Calculation

pmAverageSirError_40

pmAverageSirErrorP5MD_39

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 9.0 to 9.5 dB

Calculation

pmAverageSirError_41

pmAverageSirErrorP5MD_40

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range 9.5 to 10.0 dB

Calculation

pmAverageSirError_42

pmAverageSirP5MD_01

Average SIR on DPCCH in the range -7..-6.5dB

Calculation

pmAverageSir_09

pmAverageSirP5MD_02

Average SIR on DPCCH in the range -6.5..-6dB

Calculation

pmAverageSir_10

pmAverageSirP5MD_03

Average SIR on DPCCH in the range -6..-5.5dB

Calculation

pmAverageSir_11

pmAverageSirP5MD_04

Average SIR on DPCCH in the range -5.5..-5dB

Calculation

pmAverageSir_12

pmAverageSirP5MD_05

Average SIR on DPCCH in the range -5..-4.5dB

Calculation

pmAverageSir_13

pmAverageSirP5MD_06

Average SIR on DPCCH in the range -4.5..-4dB

Calculation

pmAverageSir_14

pmAverageSirP5MD_07

Average SIR on DPCCH in the range -4..-3.5dB

Calculation

pmAverageSir_15

pmAverageSirP5MD_08

Average SIR on DPCCH in the range -3.5..-3dB

Calculation

pmAverageSir_16

pmAverageSirP5MD_09

Average SIR on DPCCH in the range -3..-2.5dB

Calculation

pmAverageSir_17

pmAverageSirP5MD_10

Average SIR on DPCCH in the range -2.5..-2dB

Calculation

pmAverageSir_18

pmAverageSirP5MD_11

Average SIR on DPCCH in the range -2..-1.5dB

Calculation

pmAverageSir_19

pmAverageSirP5MD_12

Average SIR on DPCCH in the range -1.5..-1dB

Calculation

pmAverageSir_20

pmAverageSirP5MD_13

Average SIR on DPCCH in the range -1..-0.5dB

Calculation

pmAverageSir_21

pmAverageSirP5MD_14

Average SIR on DPCCH in the range -0.5..0dB

Calculation

pmAverageSir_22

pmAverageSirP5MD_15

Average SIR on DPCCH in the range 0..0.5dB

Calculation

pmAverageSir_23

pmAverageSirP5MD_16

Average SIR on DPCCH in the range 0.5..1dB

Calculation

pmAverageSir_24

pmAverageSirP5MD_17

Average SIR on DPCCH in the range 1..1.5dB

Calculation

pmAverageSir_25

pmAverageSirP5MD_18

Average SIR on DPCCH in the range 1.5..2dB

Calculation

pmAverageSir_26

pmAverageSirP5MD_19

Average SIR on DPCCH in the range 2..2.5dB

Calculation

pmAverageSir_27

pmAverageSirP5MD_20

Average SIR on DPCCH in the range 2.5..3dB

Calculation

pmAverageSir_28

pmAverageSirP5MD_21

Average SIR on DPCCH in the range 3..3.5dB

Calculation

pmAverageSir_29

pmAverageSirP5MD_22

Average SIR on DPCCH in the range 3.5..4dB

Calculation

pmAverageSir_30

pmAverageSirP5MD_23

Average SIR on DPCCH in the range 4..4.5dB

Calculation

pmAverageSir_31

pmAverageSirP5MD_24

Average SIR on DPCCH in the range 4.5..5dB

Calculation

pmAverageSir_32

pmAverageSirP5MD_25

Average SIR on DPCCH in the range 5..5.5dB

Calculation

pmAverageSir_33

pmAverageSirP5MD_26

Average SIR on DPCCH in the range 5.5..6dB

Calculation

pmAverageSir_34

pmAverageSirP5MD_27

Average SIR on DPCCH in the range 6..6.5dB

Calculation

pmAverageSir_35

pmAverageSirP5MD_28

Average SIR on DPCCH in the range 6.5..7dB

Calculation

pmAverageSir_36

pmAverageSirP5MD_29

Average SIR on DPCCH in the range 7..7.5dB

Calculation

pmAverageSir_37

pmAverageSirP5MD_30

Average SIR on DPCCH in the range 7.5..8dB

Calculation

pmAverageSir_38

pmAverageSirP5MD_31

Average SIR on DPCCH in the range 8..8.5dB

Calculation

pmAverageSir_39

pmAverageSirP5MD_32

Average SIR on DPCCH in the range 8.5..9dB

Calculation

pmAverageSir_40

pmAverageSirP5MD_33

Average SIR on DPCCH in the range 9..9.5dB

Calculation

pmAverageSir_41

pmAverageSirP5MD_34

Average SIR on DPCCH in the range 9.5..10dB

Calculation

pmAverageSir_42

pmAverageSirP5MD_35

Average SIR on DPCCH in the range 10..10.5dB

Calculation

pmAverageSir_43

pmAverageSirP5MD_36

Average SIR on DPCCH in the range 10.5..11dB

Calculation

pmAverageSir_44

RadioLinks Peg Counts

The following is a list of peg counts for the RadioLinks entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

RadioLinks

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RadioLinks_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

RadioLinks_WMGeneral

pmAverageSir_00

Average SIR on DPCCH.< -11dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_01

Average SIR on DPCCH.-11.0 to -10.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_02

Average SIR on DPCCH.-10.5 to -10.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_03

Average SIR on DPCCH.-10.0 to -9.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_04

Average SIR on DPCCH.-9.5 to -9.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_05

Average SIR on DPCCH.-9.0 to -8.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_06

Average SIR on DPCCH.-8.5 to -8.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_07

Average SIR on DPCCH.-8.0 to -7.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_08

Average SIR on DPCCH.-7.5 to -7.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_09

Average SIR on DPCCH.-7.0 to -6.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_10

Average SIR on DPCCH.-6.5 to -6.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_11

Average SIR on DPCCH.-6.0 to -5.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_12

Average SIR on DPCCH.-5.5 to -5.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_13

Average SIR on DPCCH.-5.0 to -4.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_14

Average SIR on DPCCH.-4.5 to -4.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_15

Average SIR on DPCCH.-4.0 to -3.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_16

Average SIR on DPCCH.-3.5 to -3.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_17

Average SIR on DPCCH.-3.0 to -2.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_18

Average SIR on DPCCH.-2.5 to -2.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_19

Average SIR on DPCCH.-2.0 to -1.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_20

Average SIR on DPCCH.-1.5 to -1.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_21

Average SIR on DPCCH.-1.0 to -0.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_22

Average SIR on DPCCH.-0.5 to 0.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_23

Average SIR on DPCCH.0.0 to 0.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_24

Average SIR on DPCCH.0.5 to 1.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_25

Average SIR on DPCCH.1.0 to 1.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_26

Average SIR on DPCCH.1.5 to 2.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_27

Average SIR on DPCCH.2.0 to 2.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_28

Average SIR on DPCCH.2.5 to 3.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_29

Average SIR on DPCCH.3.0 to 3.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_30

Average SIR on DPCCH.3.5 to 4.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_31

Average SIR on DPCCH.4.0 to 4.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_32

Average SIR on DPCCH.4.5 to 5.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_33

Average SIR on DPCCH.5.0 to 5.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_34

Average SIR on DPCCH.5.5 to 6.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_35

Average SIR on DPCCH.6.0 to 6.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_36

Average SIR on DPCCH.6.5 to 7.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_37

Average SIR on DPCCH.7.0 to 7.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_38

Average SIR on DPCCH.7.5 to 8.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_39

Average SIR on DPCCH.8.0 to 8.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_40

Average SIR on DPCCH.8.5 to 9.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_41

Average SIR on DPCCH.9.0 to 9.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_42

Average SIR on DPCCH.9.5 to 10.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_43

Average SIR on DPCCH.10.0 to 10.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_44

Average SIR on DPCCH.10.5 to 11.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_45

Average SIR on DPCCH.11.0 to 11.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_46

Average SIR on DPCCH.11.5 to 12.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_47

Average SIR on DPCCH.12.0 to 12.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_48

Average SIR on DPCCH.12.5 to 13.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_49

Average SIR on DPCCH.13.0 to 13.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_50

Average SIR on DPCCH.13.5 to 14.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_51

Average SIR on DPCCH.14.0 to 14.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_52

Average SIR on DPCCH.14.5 to 15.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_53

Average SIR on DPCCH.15.0 to 15.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_54

Average SIR on DPCCH.15.5 to 16.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_55

Average SIR on DPCCH.16.0 to 16.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_56

Average SIR on DPCCH.16.5 to 17.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_57

Average SIR on DPCCH.17.0 to 17.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_58

Average SIR on DPCCH.17.5 to 18.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_59

Average SIR on DPCCH.18.0 to 18.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_60

Average SIR on DPCCH.18.5 to 19.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_61

Average SIR on DPCCH.19.0 to 19.5 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_62

Average SIR on DPCCH.19.5 to 20.0 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSir_63

Average SIR on DPCCH greater or equal to 20 dB (Measured on maximum 2 DPCCHs per RAX board)

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSirError_01

Average Sir_Error on DPCCH.-11.0 to -10.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_02

Average Sir_Error on DPCCH.-10.5 to -10.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_03

Average Sir_Error on DPCCH.-10.0 to -9.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_04

Average Sir_Error on DPCCH.-9.5 to -9.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_05

Average Sir_Error on DPCCH.-9.0 to -8.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_06

Average Sir_Error on DPCCH.-8.5 to -8.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_07

Average Sir_Error on DPCCH.-8.0 to -7.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_08

Average Sir_Error on DPCCH.-7.5 to -7.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_09

Average Sir_Error on DPCCH.-7.0 to -6.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_10

Average Sir_Error on DPCCH.-6.5 to -6.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_11

Average Sir_Error on DPCCH.-6.0 to -5.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_12

Average Sir_Error on DPCCH.-5.5 to -5.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_13

Average Sir_Error on DPCCH.-5.0 to -4.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_14

Average Sir_Error on DPCCH.-4.5 to -4.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_15

Average Sir_Error on DPCCH.-4.0 to -3.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_16

Average Sir_Error on DPCCH.-3.5 to -3.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_17

Average Sir_Error on DPCCH.-3.0 to -2.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_18

Average Sir_Error on DPCCH.-2.5 to -2.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_19

Average Sir_Error on DPCCH.-2.0 to -1.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_20

Average Sir_Error on DPCCH.-1.5 to -1.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_21

Average Sir_Error on DPCCH.-1.0 to -0.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_22

Average Sir_Error on DPCCH.-0.5 to 0.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_23

Average Sir_Error on DPCCH.0.0 to 0.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_24

Average Sir_Error on DPCCH.0.5 to 1.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_25

Average Sir_Error on DPCCH.1.0 to 1.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_26

Average Sir_Error on DPCCH.1.5 to 2.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_27

Average Sir_Error on DPCCH.2.0 to 2.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_28

Average Sir_Error on DPCCH.2.5 to 3.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_29

Average Sir_Error on DPCCH.3.0 to 3.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_30

Average Sir_Error on DPCCH.3.5 to 4.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_31

Average Sir_Error on DPCCH.4.0 to 4.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_32

Average Sir_Error on DPCCH.4.5 to 5.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_33

Average Sir_Error on DPCCH.5.0 to 5.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_34

Average Sir_Error on DPCCH.5.5 to 6.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_35

Average Sir_Error on DPCCH.6.0 to 6.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_36

Average Sir_Error on DPCCH.6.5 to 7.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_37

Average Sir_Error on DPCCH.7.0 to 7.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_38

Average Sir_Error on DPCCH.7.5 to 8.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_39

Average Sir_Error on DPCCH.8.0 to 8.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_40

Average Sir_Error on DPCCH.8.5 to 9.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_41

Average Sir_Error on DPCCH.9.0 to 9.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_42

Average Sir_Error on DPCCH.9.5 to 10.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_43

Average Sir_Error on DPCCH.10.0 to 10.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_44

Average Sir_Error on DPCCH.10.5 to 11.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_45

Average Sir_Error on DPCCH.11.0 to 11.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_46

Average Sir_Error on DPCCH.11.5 to 12.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_47

Average Sir_Error on DPCCH.12.0 to 12.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_48

Average Sir_Error on DPCCH.12.5 to 13.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_49

Average Sir_Error on DPCCH.13.0 to 13.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_50

Average Sir_Error on DPCCH.13.5 to 14.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_51

Average Sir_Error on DPCCH.14.0 to 14.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_52

Average Sir_Error on DPCCH.14.5 to 15.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_53

Average Sir_Error on DPCCH.15.0 to 15.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_54

Average Sir_Error on DPCCH.15.5 to 16.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_55

Average Sir_Error on DPCCH.16.0 to 16.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_56

Average Sir_Error on DPCCH.16.5 to 17.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_57

Average Sir_Error on DPCCH.17.0 to 17.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_58

Average Sir_Error on DPCCH.17.5 to 18.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_59

Average Sir_Error on DPCCH.18.0 to 18.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_60

Average Sir_Error on DPCCH.18.5 to 19.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_61

Average Sir_Error on DPCCH.19.0 to 19.5 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_62

Average Sir_Error on DPCCH.19.5 to 20.0 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirError_63

Average Sir_Error on DPCCH greater or equal to 20 dB (Measured on maximum 2 DPCCHs per RAX board)

pmAverageSirErrorP5MD_00

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range < -10 dB

Data Source

NodeB

Source Field

pmAverageSirError

Source Section

RadioLinks

pmAverageSirErrorP5MD_41

The average SIR error on DPCCH physical channel. SIR error is the difference between the measured SIR and SIR target. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of sampled values in range >= 10 dB

Data Source

NodeB

Source Field

pmAverageSirError

Source Section

RadioLinks

pmAverageSirP5MD_00

Average SIR on DPCCH in the range < -7dB

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmAverageSirP5MD_37

Average SIR on DPCCH in the range ≥ 11 dB

Data Source

NodeB_RNC_RXI

Source Field

pmAverageSir

Source Section

RadioLinks

pmDpcchBer_000

Average BER_dB estimate = 0 on DPCCH calculated as $\text{Log}_{10}(\text{BER})$

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_001

Average BER_dB estimate < -2.06375 on DPCCH calculated as $\text{Log}_{10}(\text{BER})$

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_002

Average BER_dB estimate = -2.06375..-2.04750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_003

Average BER_dB estimate = -2.04750..-2.03125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_004

Average BER_dB estimate = -2.03125..-2.01500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_005

Average BER_dB estimate = -2.01500..-1.99875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_006

Average BER_dB estimate = -1.99875..-1.98250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_007

Average BER_dB estimate = -1.98250..-1.96625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_008

Average BER_dB estimate = -1.96625..-1.95000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_009

Average BER_dB estimate = -1.95000...-1.93375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_010

Average BER_dB estimate = -1.93375...-1.91750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_011

Average BER_dB estimate = -1.91750...-1.90125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_012

Average BER_dB estimate = -1.90125..-1.88500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_013

Average BER_dB estimate = -1.88500..-1.86875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_014

Average BER_dB estimate = -1.86875..-1.85250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_015

Average BER_dB estimate = -1.85250..-1.83625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_016

Average BER_dB estimate = -1.83625..-1.82000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_017

Average BER_dB estimate = -1.82000..-1.80375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_018

Average BER_dB estimate = -1.80375..-1.78750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_019

Average BER_dB estimate = -1.78750..-1.77125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_020

Average BER_dB estimate = -1.77125..-1.75500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_021

Average BER_dB estimate = -1.75500..-1.73875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_022

Average BER_dB estimate = -1.73875..-1.72250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_023

Average BER_dB estimate = -1.72250..-1.70625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_024

Average BER_dB estimate = -1.70625..-1.69000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_025

Average BER_dB estimate = -1.69000..-1.67375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_026

Average BER_dB estimate = -1.67375..-1.65750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_027

Average BER_dB estimate = -1.65750..-1.64125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_028

Average BER_dB estimate = -1.64125..-1.62500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_029

Average BER_dB estimate = -1.62500..-1.60875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_030

Average BER_dB estimate = -1.60875..-1.59250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_031

Average BER_dB estimate = -1.59250..-1.57625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_032

Average BER_dB estimate = -1.57625..-1.56000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_033

Average BER_dB estimate = -1.56000..-1.54375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_034

Average BER_dB estimate = -1.54375..-1.52750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_035

Average BER_dB estimate = -1.52750..-1.51125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_036

Average BER_dB estimate = -1.51125..-1.49500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_037

Average BER_dB estimate = -1.49500..-1.47875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_038

Average BER_dB estimate = -1.47875..-1.46250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_039

Average BER_dB estimate = -1.46250..-1.44625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_040

Average BER_dB estimate = -1.44625..-1.43000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_041

Average BER_dB estimate = -1.43000..-1.41375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_042

Average BER_dB estimate = -1.41375..-1.39750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_043

Average BER_dB estimate = -1.39750..-1.38125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_044

Average BER_dB estimate = -1.38125..-1.36500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_045

Average BER_dB estimate = -1.36500..-1.34875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_046

Average BER_dB estimate = -1.34875..-1.33250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_047

Average BER_dB estimate = -1.33250..-1.31625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_048

Average BER_dB estimate = -1.31625..-1.30000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_049

Average BER_dB estimate = -1.30000..-1.28375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_050

Average BER_dB estimate = -1.28375..-1.26750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_051

Average BER_dB estimate = -1.26750..-1.25125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_052

Average BER_dB estimate = -1.25125..-1.23500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_053

Average BER_dB estimate = -1.23500..-1.21875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_054

Average BER_dB estimate = -1.21875..-1.20250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_055

Average BER_dB estimate = -1.20250..-1.18625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_056

Average BER_dB estimate = -1.18625..-1.17000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_057

Average BER_dB estimate = -1.17000..-1.15375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_058

Average BER_dB estimate = -1.15375..-1.13750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_059

Average BER_dB estimate = -1.13750..-1.12125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_060

Average BER_dB estimate = -1.12125..-1.10500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_061

Average BER_dB estimate = -1.10500...-1.08875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_062

Average BER_dB estimate = -1.08875...-1.07250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_063

Average BER_dB estimate = -1.07250...-1.05625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_064

Average BER_dB estimate = -1.05625..-1.04000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_065

Average BER_dB estimate = -1.04000..-1.02375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_066

Average BER_dB estimate = -1.02375..-1.00750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_067

Average BER_dB estimate = -1.00750..-0.99125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_068

Average BER_dB estimate = -0.99125..-0.97500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_069

Average BER_dB estimate = -0.97500..-0.95875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_070

Average BER_dB estimate = -0.95875..-0.94250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_071

Average BER_dB estimate = -0.94250..-0.92625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_072

Average BER_dB estimate = -0.92625..-0.91000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_073

Average BER_dB estimate = -0.91000..-0.89375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_074

Average BER_dB estimate = -0.89375..-0.87750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_075

Average BER_dB estimate = -0.87750..-0.86125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_076

Average BER_dB estimate = -0.86125..-0.84500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_077

Average BER_dB estimate = -0.84500..-0.82875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_078

Average BER_dB estimate = -0.82875..-0.81250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_079

Average BER_dB estimate = -0.81250..-0.79625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_080

Average BER_dB estimate = -0.79625..-0.78000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_081

Average BER_dB estimate = -0.78000..-0.76375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_082

Average BER_dB estimate = -0.76375..-0.74750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_083

Average BER_dB estimate = -0.74750..-0.73125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_084

Average BER_dB estimate = -0.73125..-0.71500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_085

Average BER_dB estimate = -0.71500..-0.69875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_086

Average BER_dB estimate = -0.69875..-0.68250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_087

Average BER_dB estimate = -0.68250..-0.66625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_088

Average BER_dB estimate = -0.66625..-0.65000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_089

Average BER_dB estimate = -0.65000..-0.63375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_090

Average BER_dB estimate = -0.63375..-0.61750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_091

Average BER_dB estimate = -0.61750..-0.60125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_092

Average BER_dB estimate = -0.60125..-0.58500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_093

Average BER_dB estimate = -0.58500..-0.56875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_094

Average BER_dB estimate = -0.56875..-0.55250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_095

Average BER_dB estimate = -0.55250..-0.53625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_096

Average BER_dB estimate = -0.53625..-0.52000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_097

Average BER_dB estimate = -0.52000..-0.50375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_098

Average BER_dB estimate = -0.50375..-0.48750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_099

Average BER_dB estimate = -0.48750..-0.47125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_100

Average BER_dB estimate = -0.47125..-0.45500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_101

Average BER_dB estimate = -0.45500..-0.43875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_102

Average BER_dB estimate = -0.43875..-0.42250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_103

Average BER_dB estimate = -0.42250..-0.40625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_104

Average BER_dB estimate = -0.40625..-0.39000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_105

Average BER_dB estimate = -0.39000..-0.37375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_106

Average BER_dB estimate = -0.37375..-0.35750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_107

Average BER_dB estimate = -0.35750..-0.34125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_108

Average BER_dB estimate = -0.34125..-0.32500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_109

Average BER_dB estimate = -0.32500..-0.30875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_110

Average BER_dB estimate = -0.30875..-0.29250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_111

Average BER_dB estimate = -0.29250..-0.27625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_112

Average BER_dB estimate = -0.27625..-0.26000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_113

Average BER_dB estimate = -0.26000..-0.24375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_114

Average BER_dB estimate = -0.24375..-0.22750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_115

Average BER_dB estimate = -0.22750..-0.21125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_116

Average BER_dB estimate = -0.21125..-0.19500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_117

Average BER_dB estimate = -0.19500..-0.17875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_118

Average BER_dB estimate = -0.17875..-0.16250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_119

Average BER_dB estimate = -0.16250..-0.14625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_120

Average BER_dB estimate = -0.14625..-0.13000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_121

Average BER_dB estimate = -0.13000..-0.11375 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_122

Average BER_dB estimate = -0.11375..-0.09750 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_123

Average BER_dB estimate = -0.09750..-0.08125 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_124

Average BER_dB estimate = -0.08125..-0.06500 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_125

Average BER_dB estimate = -0.06500..-0.04875 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_126

Average BER_dB estimate = -0.04875..-0.03250 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_127

Average BER_dB estimate = -0.03250..-0.01625 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBer_128

Average BER_dB estimate = -0.01625..0.00000 on DPCCH calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpcchBer

Source Section

RadioLinks

pmDpcchBerP5MD_00

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of BER values that are equal to 0

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_01

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range MIN_VALUE..-2.06375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_02

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -2.06375..-1.9825

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_03

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.9825..-1.90125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_04

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.90125..-1.82

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_05

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.82..-1.73875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_06

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.73875..-1.6575

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_07

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.6575..-1.57625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_08

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.57625..-1.495

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_09

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.495..-1.41375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_10

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of

measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.41375..-1.3325

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_11

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.3325..-1.25125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_12

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.25125..-1.17

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_13

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.17..-1.08875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_14

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.08875..-1.0075

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_15

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.0075..-0.92625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_16

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.92625..-0.845

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_17

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.845..-0.76375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_18

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.76375..-0.6825

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_19

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.6825..-0.60125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_20

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.60125..-0.52

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_21

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.52..-0.43875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_22

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.43875..-0.3575

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_23

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of

measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.3575..-0.27625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpcchBerP5MD_24

The average BER for a transport channel carried by a DPCCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range ≥ -0.27625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpchCodePowerSf128_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf128_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 128

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePowerSf16_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf16_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 16

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePowerSf256_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf256_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 256

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePowerSf32_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf32_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 32

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePowerSf4_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf4_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 4

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePowerSf64_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf64_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 64

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePowerSf8_00

Number of times average transmitted code power 0-6 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_01

Number of times average transmitted code power 6-6.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_02

Number of times average transmitted code power 6.5-7 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_03

Number of times average transmitted code power 7-7.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_04

Number of times average transmitted code power 7.5-8 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_05

Number of times average transmitted code power 8-8.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_06

Number of times average transmitted code power 8.5-9 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_07

Number of times average transmitted code power 9-9.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_08

Number of times average transmitted code power 9.5-10 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_09

Number of times average transmitted code power 10-10.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_10

Number of times average transmitted code power 10.5-11 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_11

Number of times average transmitted code power 11-11.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_12

Number of times average transmitted code power 11.5-12 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_13

Number of times average transmitted code power 12-12.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_14

Number of times average transmitted code power 12.5-13 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_15

Number of times average transmitted code power 13-13.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_16

Number of times average transmitted code power 13.5-14 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_17

Number of times average transmitted code power 14-14.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_18

Number of times average transmitted code power 14.5-15 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_19

Number of times average transmitted code power 15-15.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_20

Number of times average transmitted code power 15.5-16 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_21

Number of times average transmitted code power 16-16.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_22

Number of times average transmitted code power 16.5-17 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_23

Number of times average transmitted code power 17-17.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_24

Number of times average transmitted code power 17.5-18 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_25

Number of times average transmitted code power 18-18.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_26

Number of times average transmitted code power 18.5-19 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_27

Number of times average transmitted code power 19-19.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_28

Number of times average transmitted code power 19.5-20 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_29

Number of times average transmitted code power 20-20.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_30

Number of times average transmitted code power 20.5-21 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_31

Number of times average transmitted code power 21-21.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_32

Number of times average transmitted code power 21.5-22 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_33

Number of times average transmitted code power 22-22.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_34

Number of times average transmitted code power 22.5-23 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_35

Number of times average transmitted code power 23-23.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_36

Number of times average transmitted code power 23.5-24 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_37

Number of times average transmitted code power 24-24.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_38

Number of times average transmitted code power 24.5-25 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_39

Number of times average transmitted code power 25-25.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_40

Number of times average transmitted code power 25.5-26 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_41

Number of times average transmitted code power 26-26.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_42

Number of times average transmitted code power 26.5-27 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_43

Number of times average transmitted code power 27-27.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_44

Number of times average transmitted code power 27.5-28 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_45

Number of times average transmitted code power 28-28.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_46

Number of times average transmitted code power 28.5-29 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_47

Number of times average transmitted code power 29-29.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_48

Number of times average transmitted code power 29.5-30 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_49

Number of times average transmitted code power 30-30.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_50

Number of times average transmitted code power 30.5-31 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_51

Number of times average transmitted code power 31-31.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_52

Number of times average transmitted code power 31.5-32 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_53

Number of times average transmitted code power 32-32.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_54

Number of times average transmitted code power 32.5-33 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_55

Number of times average transmitted code power 33-33.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_56

Number of times average transmitted code power 33.5-34 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_57

Number of times average transmitted code power 34-34.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_58

Number of times average transmitted code power 34.5-35 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_59

Number of times average transmitted code power 35-35.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_60

Number of times average transmitted code power 35.5-36 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_61

Number of times average transmitted code power 36-36.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_62

Number of times average transmitted code power 36.5-37 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_63

Number of times average transmitted code power 37-37.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_64

Number of times average transmitted code power 37.5-38 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_65

Number of times average transmitted code power 38-38.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_66

Number of times average transmitted code power 38.5-39 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_67

Number of times average transmitted code power 39-39.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_68

Number of times average transmitted code power 39.5-40 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_69

Number of times average transmitted code power 40-40.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_70

Number of times average transmitted code power 40.5-41 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_71

Number of times average transmitted code power 41-41.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_72

Number of times average transmitted code power 41.5-42 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_73

Number of times average transmitted code power 42-42.5 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePowerSf8_74

Number of times average transmitted code power 42.5-43 dBm on a DPCH channel. Spreading Factor = 8

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf8

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_02

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_03

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_04

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_05

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_06

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_07

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_08

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_09

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_10

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_11

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_17

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_18

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_19

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_20

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_21

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_22

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_23

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_30

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_31

The average transmitted code power on a DPCCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_32

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_33

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_34

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_35

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_36

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf128P5MD_37

The average transmitted code power on a DPCH channel for spreading factor 128. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf128

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_02

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_03

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_04

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_05

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_06

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_07

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_08

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_09

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_10

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_11

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_17

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_18

The average transmitted code power on a DPCCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_19

The average transmitted code power on a DPCCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_20

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_21

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_22

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_23

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_30

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_31

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_32

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_33

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_34

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_35

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_36

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf16P5MD_37

The average transmitted code power on a DPCH channel for spreading factor 16. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf16

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_02

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_03

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_04

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_05

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_06

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_07

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_08

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_09

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_10

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_11

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_17

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_18

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_19

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_20

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_21

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_22

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_23

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_30

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_31

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_32

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_33

The average transmitted code power on a DPCCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_34

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_35

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_36

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf256P5MD_37

The average transmitted code power on a DPCH channel for spreading factor 256. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf256

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_02

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_03

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_04

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_05

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_06

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_07

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_08

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_09

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_10

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_11

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_17

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_18

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_19

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_20

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_21

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_22

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_23

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_30

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_31

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_32

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_33

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_34

The average transmitted code power on a DPCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_35

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_36

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf32P5MD_37

The average transmitted code power on a DPCCH channel for spreading factor 32. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf32

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_02

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_03

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_04

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_05

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_06

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_07

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_08

The average transmitted code power on a DPCCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_09

The average transmitted code power on a DPCCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_10

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_11

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_17

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_18

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_19

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_20

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_21

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_22

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_23

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_30

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_31

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_32

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_33

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_34

The average transmitted code power on a DPCCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_35

The average transmitted code power on a DPCCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_36

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf4P5MD_37

The average transmitted code power on a DPCH channel for spreading factor 4. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf4

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_00

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range MIN_VALUE..6dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_01

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 6..7 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_02

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 7..8 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_03

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 8..9 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_04

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 9..10 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_05

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 10..11 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_06

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 11..12 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_07

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 12..13 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_08

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 13..14 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_09

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 14..15 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_10

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 15..16 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_11

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 16..17 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_12

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 17..18 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_13

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 18..19 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_14

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 19..20 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_15

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 20..21 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_16

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 21..22 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_17

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 22..23 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_18

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 23..24 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_19

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 24..25 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_20

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 25..26 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_21

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 26..27 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_22

The average transmitted code power on a DPCCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 27..28 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_23

The average transmitted code power on a DPCCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 28..29 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_24

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 29..30 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_25

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 30..31 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_26

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 31..32 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_27

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 32..33 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_28

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 33..34 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_29

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of

measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 34..35 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_30

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 35..36 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_31

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 36..37 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_32

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 37..38 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_33

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 38..39 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_34

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 39..40 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_35

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 40..41 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_36

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 41..42 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpchCodePwrSf64P5MD_37

The average transmitted code power on a DPCH channel for spreading factor 64. In order to control load, number of measurements are restricted per TXB. Maximum number of measurements are 10 % of the maximum number of CEs per TXB. Number of samples in the range 42..43 dBm

Data Source

NodeB_RNC_RXI

Source Field

pmDpchCodePowerSf64

Source Section

RadioLinks

pmDpdchBer_000

Average BER_dB for a transport channel carried by a DPDCH = 0 calculated as $\text{Log}_{10}(\text{BER})$

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_001

Average BER_dB for a transport channel carried by a DPDCH < -2.06375 calculated as $\text{Log}_{10}(\text{BER})$

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_002

Average BER_dB for a transport channel carried by a DPDCH = -2.06375..-2.04750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_003

Average BER_dB for a transport channel carried by a DPDCH = -2.04750..-2.03125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_004

Average BER_dB for a transport channel carried by a DPDCH = -2.03125..-2.01500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_005

Average BER_dB for a transport channel carried by a DPDCH = -2.01500..-1.99875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_006

Average BER_dB for a transport channel carried by a DPDCH = -1.99875..-1.98250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_007

Average BER_dB for a transport channel carried by a DPDCH = -1.98250..-1.96625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_008

Average BER_dB for a transport channel carried by a DPDCH = -1.96625..-1.95000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_009

Average BER_dB for a transport channel carried by a DPDCH = -1.95000..-1.93375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_010

Average BER_dB for a transport channel carried by a DPDCH = -1.93375..-1.91750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_011

Average BER_dB for a transport channel carried by a DPDCH = -1.91750..-1.90125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_012

Average BER_dB for a transport channel carried by a DPDCH = -1.90125..-1.88500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_013

Average BER_dB for a transport channel carried by a DPDCH = -1.88500..-1.86875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_014

Average BER_dB for a transport channel carried by a DPDCH = -1.86875..-1.85250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_015

Average BER_dB for a transport channel carried by a DPDCH = -1.85250..-1.83625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_016

Average BER_dB for a transport channel carried by a DPDCH = -1.83625..-1.82000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_017

Average BER_dB for a transport channel carried by a DPDCH = -1.82000..-1.80375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_018

Average BER_dB for a transport channel carried by a DPDCH = -1.80375..-1.78750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_019

Average BER_dB for a transport channel carried by a DPDCH = -1.78750..-1.77125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_020

Average BER_dB for a transport channel carried by a DPDCH = -1.77125..-1.75500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_021

Average BER_dB for a transport channel carried by a DPDCH = -1.75500..-1.73875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_022

Average BER_dB for a transport channel carried by a DPDCH = -1.73875..-1.72250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_023

Average BER_dB for a transport channel carried by a DPDCH = -1.72250..-1.70625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_024

Average BER_dB for a transport channel carried by a DPDCH = -1.70625..-1.69000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_025

Average BER_dB for a transport channel carried by a DPDCH = -1.69000..-1.67375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_026

Average BER_dB for a transport channel carried by a DPDCH = -1.67375..-1.65750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_027

Average BER_dB for a transport channel carried by a DPDCH = -1.65750..-1.64125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_028

Average BER_dB for a transport channel carried by a DPDCH = -1.64125..-1.62500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_029

Average BER_dB for a transport channel carried by a DPDCH = -1.62500..-1.60875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_030

Average BER_dB for a transport channel carried by a DPDCH = -1.60875..-1.59250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_031

Average BER_dB for a transport channel carried by a DPDCH = -1.59250..-1.57625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_032

Average BER_dB for a transport channel carried by a DPDCH = -1.57625..-1.56000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_033

Average BER_dB for a transport channel carried by a DPDCH = -1.56000..-1.54375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_034

Average BER_dB for a transport channel carried by a DPDCH = -1.54375..-1.52750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_035

Average BER_dB for a transport channel carried by a DPDCH = -1.52750..-1.51125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_036

Average BER_dB for a transport channel carried by a DPDCH = -1.51125..-1.49500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_037

Average BER_dB for a transport channel carried by a DPDCH = -1.49500..-1.47875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_038

Average BER_dB for a transport channel carried by a DPDCH = -1.47875..-1.46250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_039

Average BER_dB for a transport channel carried by a DPDCH = -1.46250..-1.44625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_040

Average BER_dB for a transport channel carried by a DPDCH = -1.44625..-1.43000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_041

Average BER_dB for a transport channel carried by a DPDCH = -1.43000..-1.41375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_042

Average BER_dB for a transport channel carried by a DPDCH = -1.41375..-1.39750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_043

Average BER_dB for a transport channel carried by a DPDCH = -1.39750..-1.38125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_044

Average BER_dB for a transport channel carried by a DPDCH = -1.38125..-1.36500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_045

Average BER_dB for a transport channel carried by a DPDCH = -1.36500..-1.34875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_046

Average BER_dB for a transport channel carried by a DPDCH = -1.34875..-1.33250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_047

Average BER_dB for a transport channel carried by a DPDCH = -1.33250..-1.31625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_048

Average BER_dB for a transport channel carried by a DPDCH = -1.31625..-1.30000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_049

Average BER_dB for a transport channel carried by a DPDCH = -1.30000..-1.28375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_050

Average BER_dB for a transport channel carried by a DPDCH = -1.28375..-1.26750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_051

Average BER_dB for a transport channel carried by a DPDCH = -1.26750..-1.25125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_052

Average BER_dB for a transport channel carried by a DPDCH = -1.25125..-1.23500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_053

Average BER_dB for a transport channel carried by a DPDCH = -1.23500..-1.21875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_054

Average BER_dB for a transport channel carried by a DPDCH = -1.21875..-1.20250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_055

Average BER_dB for a transport channel carried by a DPDCH = -1.20250..-1.18625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_056

Average BER_dB for a transport channel carried by a DPDCH = -1.18625..-1.17000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_057

Average BER_dB for a transport channel carried by a DPDCH = -1.17000..-1.15375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_058

Average BER_dB for a transport channel carried by a DPDCH = -1.15375..-1.13750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_059

Average BER_dB for a transport channel carried by a DPDCH = -1.13750..-1.12125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_060

Average BER_dB for a transport channel carried by a DPDCH = -1.12125..-1.10500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_061

Average BER_dB for a transport channel carried by a DPDCH = -1.10500..-1.08875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_062

Average BER_dB for a transport channel carried by a DPDCH = -1.08875..-1.07250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_063

Average BER_dB for a transport channel carried by a DPDCH = -1.07250..-1.05625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_064

Average BER_dB for a transport channel carried by a DPDCH = -1.05625..-1.04000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_065

Average BER_dB for a transport channel carried by a DPDCH = -1.04000..-1.02375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_066

Average BER_dB for a transport channel carried by a DPDCH = -1.02375..-1.00750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_067

Average BER_dB for a transport channel carried by a DPDCH = -1.00750..-0.99125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_068

Average BER_dB for a transport channel carried by a DPDCH = -0.99125..-0.97500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_069

Average BER_dB for a transport channel carried by a DPDCH = -0.97500..-0.95875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_070

Average BER_dB for a transport channel carried by a DPDCH = -0.95875..-0.94250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_071

Average BER_dB for a transport channel carried by a DPDCH = -0.94250..-0.92625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_072

Average BER_dB for a transport channel carried by a DPDCH = -0.92625..-0.91000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_073

Average BER_dB for a transport channel carried by a DPDCH = -0.91000..-0.89375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_074

Average BER_dB for a transport channel carried by a DPDCH = -0.89375..-0.87750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_075

Average BER_dB for a transport channel carried by a DPDCH = -0.87750..-0.86125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_076

Average BER_dB for a transport channel carried by a DPDCH = -0.86125..-0.84500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_077

Average BER_dB for a transport channel carried by a DPDCH = -0.84500..-0.82875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_078

Average BER_dB for a transport channel carried by a DPDCH = -0.82875..-0.81250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_079

Average BER_dB for a transport channel carried by a DPDCH = -0.81250..-0.79625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_080

Average BER_dB for a transport channel carried by a DPDCH = -0.79625..-0.78000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_081

Average BER_dB for a transport channel carried by a DPDCH = -0.78000..-0.76375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_082

Average BER_dB for a transport channel carried by a DPDCH = -0.76375..-0.74750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_083

Average BER_dB for a transport channel carried by a DPDCH = -0.74750..-0.73125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_084

Average BER_dB for a transport channel carried by a DPDCH = -0.73125..-0.71500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_085

Average BER_dB for a transport channel carried by a DPDCH = -0.71500..-0.69875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_086

Average BER_dB for a transport channel carried by a DPDCH = -0.69875..-0.68250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_087

Average BER_dB for a transport channel carried by a DPDCH = -0.68250..-0.66625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_088

Average BER_dB for a transport channel carried by a DPDCH = -0.66625..-0.65000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_089

Average BER_dB for a transport channel carried by a DPDCH = -0.65000..-0.63375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_090

Average BER_dB for a transport channel carried by a DPDCH = -0.63375..-0.61750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_091

Average BER_dB for a transport channel carried by a DPDCH = -0.61750..-0.60125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_092

Average BER_dB for a transport channel carried by a DPDCH = -0.60125..-0.58500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_093

Average BER_dB for a transport channel carried by a DPDCH = -0.58500..-0.56875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_094

Average BER_dB for a transport channel carried by a DPDCH = -0.56875..-0.55250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_095

Average BER_dB for a transport channel carried by a DPDCH = -0.55250..-0.53625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_096

Average BER_dB for a transport channel carried by a DPDCH = -0.53625..-0.52000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_097

Average BER_dB for a transport channel carried by a DPDCH = -0.52000..-0.50375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_098

Average BER_dB for a transport channel carried by a DPDCH = -0.50375..-0.48750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_099

Average BER_dB for a transport channel carried by a DPDCH = -0.48750..-0.47125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_100

Average BER_dB for a transport channel carried by a DPDCH = -0.47125..-0.45500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_101

Average BER_dB for a transport channel carried by a DPDCH = -0.45500..-0.43875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_102

Average BER_dB for a transport channel carried by a DPDCH = -0.43875..-0.42250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_103

Average BER_dB for a transport channel carried by a DPDCH = -0.42250..-0.40625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_104

Average BER_dB for a transport channel carried by a DPDCH = -0.40625..-0.39000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_105

Average BER_dB for a transport channel carried by a DPDCH = -0.39000..-0.37375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_106

Average BER_dB for a transport channel carried by a DPDCH = -0.37375..-0.35750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_107

Average BER_dB for a transport channel carried by a DPDCH = -0.35750..-0.34125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_108

Average BER_dB for a transport channel carried by a DPDCH = -0.34125..-0.32500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_109

Average BER_dB for a transport channel carried by a DPDCH = -0.32500..-0.30875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_110

Average BER_dB for a transport channel carried by a DPDCH = -0.30875..-0.29250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_111

Average BER_dB for a transport channel carried by a DPDCH = -0.29250..-0.27625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_112

Average BER_dB for a transport channel carried by a DPDCH = -0.27625..-0.26000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_113

Average BER_dB for a transport channel carried by a DPDCH = -0.26000..-0.24375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_114

Average BER_dB for a transport channel carried by a DPDCH = -0.24375..-0.22750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_115

Average BER_dB for a transport channel carried by a DPDCH = -0.22750..-0.21125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_116

Average BER_dB for a transport channel carried by a DPDCH = -0.21125..-0.19500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_117

Average BER_dB for a transport channel carried by a DPDCH = -0.19500..-0.17875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_118

Average BER_dB for a transport channel carried by a DPDCH = -0.17875..-0.16250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_119

Average BER_dB for a transport channel carried by a DPDCH = -0.16250..-0.14625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_120

Average BER_dB for a transport channel carried by a DPDCH = -0.14625..-0.13000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_121

Average BER_dB for a transport channel carried by a DPDCH = -0.13000..-0.11375 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_122

Average BER_dB for a transport channel carried by a DPDCH = -0.11375..-0.09750 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_123

Average BER_dB for a transport channel carried by a DPDCH = -0.09750..-0.08125 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_124

Average BER_dB for a transport channel carried by a DPDCH = -0.08125..-0.06500 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_125

Average BER_dB for a transport channel carried by a DPDCH = -0.06500..-0.04875 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_126

Average BER_dB for a transport channel carried by a DPDCH = -0.04875..-0.03250 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_127

Average BER_dB for a transport channel carried by a DPDCH = -0.03250..-0.01625 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBer_128

Average BER_dB for a transport channel carried by a DPDCH = -0.01625..0.00000 calculated as Log10(BER)

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_00

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of BER values that are equal to 0

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_01

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range MIN_VALUE..-2.06375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_02

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -2.06375..-1.9825

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_03

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.9825..-1.90125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_04

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.90125..-1.82

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_05

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.82..-1.73875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_06

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.73875..-1.6575

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_07

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.6575..-1.57625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_08

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.57625..-1.495

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_09

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.495..-1.41375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_10

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.41375..-1.3325

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_11

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.3325..-1.25125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_12

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of

measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.25125..-1.17

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_13

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.17..-1.08875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_14

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.08875..-1.0075

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_15

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -1.0075..-0.92625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_16

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.92625..-0.845

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_17

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.845..-0.76375

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_18

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.76375..-0.6825

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_19

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.6825..-0.60125

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_20

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.60125..-0.52

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_21

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.52..-0.43875

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_22

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.43875..-0.3575

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_23

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range -0.3575..-0.27625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmDpdchBerP5MD_24

The average BER for a transport channel carried by a DPDCH physical channel. In order to control load, number of measurements are restricted per RAXB. Maximum number of measurements are 10 % of the maximum number of CEs per RAXB. Number of log10(BER) values in range ≥ -0.27625

Data Source

NodeB_RNC_RXI

Source Field

pmDpdchBer

Source Section

RadioLinks

pmOutOfSynch_00

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 0..200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_01

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 200..400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_02

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 400..600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_03

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 600..800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_04

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 800..1000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_05

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 1000..1200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_06

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 1200..1400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_07

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 1400..1600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_08

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 1600..1800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_09

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 1800..2000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_10

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 2000..2200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_11

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 2200..2400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_12

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 2400..2600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_13

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 2600..2800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_14

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 2800..3000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_15

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 3000..3200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_16

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 3200..3400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_17

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 3400..3600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_18

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 3600..3800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_19

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 3800..4000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_20

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 4000..4200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_21

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 4200..4400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_22

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 4400..4600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_23

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 4600..4800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_24

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 4800..5000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_25

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 5000..5200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_26

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 5200..5400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_27

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 5400..5600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_28

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 5600..5800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_29

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 5800..6000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_30

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 6000..6200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_31

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 6200..6400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_32

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 6400..6600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_33

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 6600..6800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_34

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 6800..7000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_35

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 7000..7200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_36

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 7200..7400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_37

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 7400..7600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_38

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 7600..7800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_39

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 7800..8000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_40

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 8000..8200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_41

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 8200..8400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_42

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 8400..8600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_43

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 8600..8800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_44

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 8800..9000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_45

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 9000..9200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_46

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 9200..9400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_47

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 9400..9600 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_48

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 9600..9800 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmOutOfSynch_49

Duration of out of sync in millisecond. Reported for all RL set activated during the 15 minutes period. 9800..10000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmOutOfSynch

Source Section

RadioLinks

pmRLSSupSynchToUnsynch

The number of state transitions from synchronized to unsynchronized during a GP

Data Source

NodeB_RNC_RXI

Source Field

pmRLSSupSynchToUnsynch

Source Section

RadioLinks

pmRLSSupWaitToOutOfSynch

The number of wait to out-of-synch state transitions

Data Source

NodeB

Source Field

pmRLSSupWaitToOutOfSynch

Source Section

RadioLinks

pmUISynchTime_00

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs in the range 0-50 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_01

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs in the range 50-100 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_02

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs in the range 100-150 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_03

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 150-200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_04

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 200-250 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_05

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 250-300 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_06

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 300-350 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_07

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 350-400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_08

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 400-450 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_09

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 450-1000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_10

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 1000-2000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_11

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 2000-3000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_12

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 3000-4000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_13

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 4000-5000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_14

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLs. in the range 5000-6000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTime_15

The time between Downlink (DL) TX assignment, and achieved Uplink (UL) synchronization for RLS.in the range 5000-infinity ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTime

Source Section

RadioLinks

pmUISynchTimeSHO_00

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS.in the range 0-50 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_01

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 50-100 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_02

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 100-150 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_03

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 150-200 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_04

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 200-250 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_05

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 250-300 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_06

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 300-350 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_07

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 350-400 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_08

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 400-450 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_09

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 450-1000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_10

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 1000-2000 m

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_11

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 2000-3000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_12

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 3000-4000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_13

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 4000-5000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_14

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 5000-6000 ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

pmUISynchTimeSHO_15

The synchronization time between DL RX assignment and achieved UL synchronization for RLS not belonging to the first RLS in the range 5000-infinity ms

Data Source

NodeB_RNC_RXI

Source Field

pmUISynchTimeSHO

Source Section

RadioLinks

Ranap Primitive Calculations

The following is a list of primitive calculations for the Ranap entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Ranap Peg Counts

The following is a list of peg counts for the Ranap entity.

PERLENSEC

Period length in seconds

Data Source

RNC

Source Field

PERLENSEC

Source Section

Ranap_Gen

pmNnsfLoadDistributionRouted

Number of Ue Initial Direct Transfer messages routed to this Iu interface by the NNSF (Non access stratum Node Selection Function), for which the NRI (Network Resource Identifier) transferred by the Ue does not match the NRI of any configured Iu interface.

Data Source

RNC

Source Field

pmNnsfLoadDistributionRouted

Source Section

Ranap

pmNnsfNriRouted

Number of Ue Initial Direct Transfer messages routed to this Iu interface by the NNSF (Non access stratum Node Selection Function), for which the NRI (Network Resource Identifier) transferred by the Ue matches the NRI of this Iu interface.

Data Source

RNC

Source Field

pmNnsfNriRouted

Source Section

Ranap

RNC_RELEASE

Release

Data Source

RNC

Source Field

RNC_RELEASE

Source Section

Ranap_Gen

RNC

The following is a list of for the RNC entity.

RNC_SubNetwork_Region

RNC SubNetwork Region ID

RNC Primitive Calculations

The following is a list of primitive calculations for the RNC entity.

Average_CS_Speech_Users_per_RNC

The average number of speech users per RNC in a measurement period of 15 minutes. The sum is performed on the result of the fraction

Calculation

```
AGGR(NodeB.Sector.UtranCell,Average_CS_Speech_Users_per_Cell)
```

Avr_PS_Interactive_Calls_DCH

The average number of PS interactive calls on DCH per RNC, where pmSamplesRabEstablish(UeRc) could be for any UeRc = 5 , 6, or 7. The value of samples should be equal for all cases.

Calculation

```
AGGR(RABType[sub-String(LocalKey,0,9)=="PACKET_64"],Avr_PS_RAB_STBL_SUCC_RATE)
```

Avr_PS_Interactive_Calls_FACH

The average number of PS interactive calls on FACH per RNC pmSamplesRabEstablish(UeRc) could be for only UeRc = 4.

Calculation

```
AGGR(RABType[LocalKey == "PACKET_RACH_FACH"], Avr_PS_RAB_STBL_SUCC_RATE )
```

CS_64_DL_Code_Utilization_per_RNC

The average number of downlink code is occupied for CS 64 traffic per RNC in a measurement period.

Calculation

```
AGGR(NodeB.Sector.UtranCell,CS_64_DL_Code_Utilization)
```

CS_Speech_Downlink_Code_Utilization_per_RNC

The average number of downlink code is occupied for speech traffic per RNC in a measurement period of 15 minutes.

Calculation

```
AGGR(NodeB.Sector.UtranCell,CS_Speech_Downlink_Code_Utilization_per_Cell)
```

CS_Speech_Erlang_per_RNC

The average speech traffic Erlang carried per RNC. This is best fitted with Erlang definition through hourly report

Calculation

```
AGGR(NodeB.Sector.UtranCell,CS_Speech_Erlang)
```

DL_Payload_PS_Interactive_DCH

The downlink payload in kbits carried on DCH before splitting for PS Interactive per RNC. Sum of the pmDlDchTrafficVolumeBeforeSplit when UeRc = 5 , 6, or 7

Calculation

```
AGGR(RABType[subString(LocalKey,0,9)=="PACKET_64"], pmDlDchTrafficVolume-  
BeforeSplit )
```

DL_Payload_PS_Interactive_FACH

The downlink payload in kbits carried on FACH (common Channels) for PS Interactive per RNC. Retransmissions are also counted as part of the traffic volume.

Calculation

```
AGGR(RABType, pmDlFachTrafficVolume )
```

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

Handover_Reduction_Factor_per_RNC

The Handover Reduction Factor (HRF) per RNC for speech is defined as the ratio of downlink code channel utilization for speech and the average number speech users served per RNC. This metric shows how much of the radio resources (code and power) are used.

Calculation

```
AGGR(NodeB.Sector.UtranCell,Handover_Reduction_Factor)
```

k_PAYLOAD_DL_TOT

DL Total RNC payload traffic (Mbit), derived from FACH payload + DCH payload before diversity split.

Calculation

AGGR(RABType, k_PAYLOAD_DL_TOT)

k_PAYLOAD_UL_TOT

UL Total RNC payload traffic (Mbit), derived from RACH payload + DCH payload after diversity combining.

Calculation

AGGR(RABType, k_PAYLOAD_UL_TOT)

k_RAB_EST_FAIL

Number of RAB Establishment failures

Calculation

AGGR(RABType, k_RAB_EST_FAIL)

k_RAB_EST_FAIL_RATE

RAB Establishment failure rate %

Calculation

AGGR(RABType, k_RAB_EST_FAIL_RATE)

k_RAB_REL_FAIL

Number of failed RAB releases

Calculation

AGGR(RABType, k_RAB_REL_FAIL)

k_RAB_REL_FAIL_RATE

RAB release failure rate %

Calculation

AGGR(RABType, k_RAB_REL_FAIL_RATE)

MainProcessorLoadRNC

Main CPU load % (based on Operating System Enea function).

Calculation

AGGR(Equipment_RNC, MainProcessorLoadRNC_Equipment)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

PAYLOAD_CS_DL_MB

Payload traffic on downlink in megabyte (MB) for Circuit Switched RABs before macro diversity

Calculation

AGGR(NodeB.Sector.UtranCell, PAYLOAD_CS_DL_MB)

PAYLOAD_CS_UL_MB

Payload traffic on uplink in megabyte (MB) for Circuit Switched RABs before macro diversity

Calculation

AGGR(NodeB.Sector.UtranCell, PAYLOAD_CS_UL_MB)

PAYLOAD_PS_DL_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched RABs before macro diversity

Calculation

AGGR(NodeB.Sector.UtranCell, PAYLOAD_PS_DL_MB)

PAYLOAD_PS_UL_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched RABs before macro diversity

Calculation

AGGR(NodeB.Sector.UtranCell, PAYLOAD_PS_UL_MB)

PAYLOAD_TOT_DL_MB

Payload traffic on downlink in megabyte (MB) for Circuit Switched RABs before macro diversity

Calculation

AGGR(NodeB.Sector.UtranCell, PAYLOAD_TOT_DL_MB)

PAYLOAD_TOT_UL_MB

Payload traffic on uplink in megabyte (MB) for Circuit Switched RABs before macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, PAYLOAD_TOT_UL_MB)`

pmDlTrafficVolumeCs12_MB

Payload traffic on downlink in megabyte (MB) for conversational/speech 12.2 kbps Circuit Switched RAB after macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumeCs12) / (8.0 * 1024.0)`

pmDlTrafficVolumeCs12Ps0_MB

Payload traffic on DL in megabyte (MB) for speech 12.2 kbps CS and PS 0/0 kbps multi RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumeCs12Ps0) / (8.0 * 1024.0)`

pmDlTrafficVolumeCs12Ps64_MB

Payload traffic on DL in megabyte (MB) for speech 12.2 kbps CS and PS 64/64 kbps multi RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumeCs12Ps64) / (8.0 * 1024.0)`

pmDlTrafficVolumeCs57_MB

Payload traffic on downlink in megabyte (MB) for streaming 57.6 kbps Circuit Switched RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumeCs57) / (8.0 * 1024.0)`

pmDlTrafficVolumeCs64_MB

Payload traffic on downlink in megabyte (MB) for conversational 64 kbps Circuit Switched RAB after macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumeCs64) / (8.0 * 1024.0)`

pmDlTrafficVolumePs128_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched 64/128 kbps RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumePs128) / (8.0 * 1024.0)`

pmDlTrafficVolumePs384_MB

Payload traffic on downlink in megabyte (MB) for PS 64/384 RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumePs384) / (8.0 * 1024.0)`

pmDlTrafficVolumePs64_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched 64/64 kbps RAB after macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumePs64) / (8.0 * 1024.0)`

pmDlTrafficVolumePsCommon_MB

Payload traffic on DL in megabyte (MB) for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmDlTrafficVolumePsCommon) / (8.0 * 1024.0)`

pmUlTrafficVolumeCs12_MB

Payload traffic on uplink in megabyte (MB) for conversational/speech 12.2 kbps Circuit Switched RAB before macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUlTrafficVolumeCs12) / (8.0 * 1024.0)`

pmUlTrafficVolumeCs12Ps0_MB

Payload traffic on UL in megabyte (MB) for speech 12.2 kbps CS and PS 0/0 kbps multi RAB before macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUlTrafficVolumeCs12Ps0) / (8.0 * 1024.0)`

pmUITrafficVolumeCs12Ps64_MB

Payload traffic on UL in megabyte (MB) for speech 12.2 kbps CS and PS 64/64 kbps multi RAB before macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumeCs12Ps64) / (8.0 * 1024.0)`

pmUITrafficVolumeCs57_MB

Payload traffic on uplink in megabyte (MB) for streaming 57.6 kbps Circuit Switched RAB before macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumeCs57) / (8.0 * 1024.0)`

pmUITrafficVolumeCs64_MB

Payload traffic on uplink in megabyte (MB) for conversational 64 kbps Circuit Switched RAB before macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumeCs64) / (8.0 * 1024.0)`

pmUITrafficVolumePs128_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/128 kbps RAB before macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumePs128) / (8.0 * 1024.0)`

pmUITrafficVolumePs384_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/384 kbps RAB before macro diversity.

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumePs384) / (8.0 * 1024.0)`

pmUITrafficVolumePs64_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/64 kbps RAB before macro diversity

Calculation

`AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumePs64) / (8.0 * 1024.0)`

pmUITrafficVolumePsCommon_MB

Payload traffic on UL in megabyte (MB) for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Calculation

```
AGGR(NodeB.Sector.UtranCell, pmUITrafficVolumePsCommon) / (8.0 * 1024.0)
```

POSITIONING_FAIL

Ue Positioning fail rate % (requested from the core network)

Calculation

```
(pmPositioningReqAtt - pmPositioningReqSucc) * 100.0 / pmPositioningReqAtt
```

RAB_EST_ATT_CS57

Number of Circuit Switched 57 kbps variable rate RAB establishment attempts.

Calculation

```
AGGR(RABType[LocalKey == "57_KBPS_CS_DATA_VARIABLE_RATE"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_CS64

Number of Circuit Switched 64 kbps RAB establishment attempts.

Calculation

```
AGGR(RABType[LocalKey == "64_KBPS_CS_DATA_FIXED_RATE"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_PS128

Number of Packet Switched 64/128 kbps RAB establishment attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_128"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_PS384

Number of Packet Switched 64/384 kbps RAB establishment attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_384"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_PS64

Number of Packet Switched 64/64 kbps RAB establishment attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_64"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_PSCOMMON

Number of Packet Switched RAB establishment attempts on Common Channel (RACH and FACH)

Calculation

```
AGGR(RABType[LocalKey == "PACKET_RACH_FACH"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_SP_PS0

Number of Speech and PS0 multi-RAB establishment attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_0_KBPS"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_SP_PS64

Number of Speech and PS64 multi-RAB establishment attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_64_KBPS"], pmNoRabEstablishAttempts)
```

RAB_EST_ATT_SPEECH

Number of Speech RAB establishment attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH"], pmNoRabEstablishAttempts)
```

RAB_EST_FAIL_CS57

Circuit Switched 57 kbps variable rate RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "57_KBPS_CS_DATA_VARIABLE_RATE"],  
k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_CS64

Circuit Switched 64 kbps RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "64_KBPS_CS_DATA_FIXED_RATE"],  
k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_PS128

Packet Switched 64/128 kbps RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_128"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_PS384

Packet Switched 64/384 kbps RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_384"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_PS64

Packet Switched 64/64 kbps RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_64"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_PSCOMMON

Packet Switched RAB establishment fail rate % on Common Channel (RACH and FACH)

Calculation

```
AGGR(RABType[LocalKey == "PACKET_RACH_FACH"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_SP_PS0

Speech and PS0 multi-RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_0_KBPS"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_SP_PS64

Speech and PS64 multi-RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_64KBPS"], k_RAB_EST_FAIL_RATE)
```

RAB_EST_FAIL_SPEECH

Speech RAB establishment fail rate %

Calculation

```
AGGR(RABType[LocalKey == "SPEECH"], k_RAB_EST_FAIL_RATE)
```

RAB_REL_ATT_CS57

Number of Circuit Switched 57 kbps variable rate RAB release attempts.

Calculation

```
AGGR(RABType[LocalKey == "57_KBPS_CS_DATA_VARIABLE_RATE"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_CS64

Number of Circuit Switched 64 kbps RAB release attempts.

Calculation

```
AGGR(RABType[LocalKey == "64_KBPS_CS_DATA_FIXED_RATE"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_PS128

Number of Packet Switched 64/128 kbps RAB release attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_128"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_PS384

Number of Packet Switched 64/384 kbps RAB release attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_384"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_PS64

Number of Packet Switched 64/64 kbps RAB release attempts

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_64"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_PSCOMMON

Number of Packet Switched RAB release attempts on Common Channel (RACH and FACH)

Calculation

```
AGGR(RABType[LocalKey == "PACKET_RACH_FACH"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_SP_PS0

Number of Speech and PS0 multi-RAB release attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_0_KBPS"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_SP_PS64

Number of Speech and PS64 multi-RAB release attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_64_KBPS"], pmNoRabReleaseAttempts)
```

RAB_REL_ATT_SPEECH

Number of Speech RAB release attempts.

Calculation

```
AGGR(RABType[LocalKey == "SPEECH"], pmNoRabReleaseAttempts)
```

RAB_REL_FAIL_CS57

Circuit Switched 57 kbps variable rate RAB release fail rate %

Calculation

```
AGGR(RABType[LocalKey == "57_KBPS_CS_DATA_VARIABLE_RATE"],  
k_RAB_REL_FAIL_RATE)
```

RAB_REL_FAIL_CS64

Circuit Switched 64 kbps RAB release fail rate %

Calculation

```
AGGR(RABType[LocalKey == "64_KBPS_CS_DATA_FIXED_RATE"],  
k_RAB_REL_FAIL_RATE)
```

RAB_REL_FAIL_PS128

Packet Switched 64/128 kbps RAB release fail rate %

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_128"], k_RAB_REL_FAIL_RATE)
```

RAB_REL_FAIL_PS384

Packet Switched 64/384 kbps RAB release fail rate %

Calculation

```
AGGR(RABType[LocalKey == "PACKET_64_384"], k_RAB_REL_FAIL_RATE)
```

RAB_REL_FAIL_PS64

Packet Switched 64/64 kbps RAB release fail rate %

Calculation

`AGGR(RABType[LocalKey == "PACKET_64_64"], k_RAB_REL_FAIL_RATE)`

RAB_REL_FAIL_PSCOMMON

Packet Switched RAB release fail rate % on Common Channel (RACH and FACH)

Calculation

`AGGR(RABType[LocalKey == "PACKET_RACH_FACH"], k_RAB_REL_FAIL_RATE)`

RAB_REL_FAIL_SP_PS0

Speech and PS0 multi-RAB release fail rate %

Calculation

`AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_0_KBPS"], k_RAB_REL_FAIL_RATE)`

RAB_REL_FAIL_SP_PS64

Speech and PS64 multi-RAB release fail rate %

Calculation

`AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_64KBPS"], k_RAB_REL_FAIL_RATE)`

RAB_REL_FAIL_SPEECH

Speech RAB release fail rate %

Calculation

`AGGR(RABType[LocalKey == "SPEECH"], k_RAB_REL_FAIL_RATE)`

RNCOutRelocationSuccessRate

Number of successful outgoing relocation from the RNC %

Calculation

`NRNTOHRSUCC * 100.0 / NRNTSRRTOT`

RNCRelocationSuccessRate

Successful incoming relocation to the RNC in procent

Calculation

`NRNTIHRUCC * 100.0 / NRNTSRRTOT`

SuccOutUMTSGSMHoRNCRate

Successful outgoing UMTS to GSM handovers from the RNC in Procent

Calculation

$$\text{NRNTORGSUCC} * 100.0 / \text{NRNTRRRGTOT}$$

UL_Payload_PS_Interactive_DCH

The uplink payload in kbits carried on DCH after combining for PS Interactive per RNC, sum of the pmUIDchTrafficVolumeAfterComb when UeRc = 5 , 6, or 7

Calculation

$$\text{AGGR}(\text{RABType}[\text{subString}(\text{LocalKey}, 0, 9) == \text{"PACKET_64"}], \text{pmUIDchTrafficVolumeAfterComb})$$

UL_Payload_PS_Interactive_RACH

The uplink payload in kbits carried on RACH for PS Interactive per RNC, aggregate pmUIRachTrafficVolume to RNC when UeRc = 4

Calculation

$$\text{AGGR}(\text{RABType}[\text{LocalKey} == \text{"PACKET_RACH_FACH"}], \text{pmUIRachTrafficVolume})$$

Uplink_CS_64_BLER

Transport block error rate after combining at RNC in uplink for CS 64 (UeRc = 3).

Calculation

$$\text{AGGR}(\text{RABType}[\text{LocalKey} == \text{"64_KBPS_CS_DATA_FIXED_RATE"}], \text{Uplink_BLER})$$

Uplink_CS_Streaming_BLER

Transport block error rate after combining at RNC in uplink for CS 57 (UeRc = 8).

Calculation

$$\text{AGGR}(\text{RABType}[\text{LocalKey} == \text{"57_KBPS_CS_DATA_VARIABLE_RATE"}], \text{Uplink_BLER})$$

Uplink_PS_Interactive_BLER

Transport block error rate after combining at RNC in uplink for PS interactive (UeRc = 4, 5, 6, and 7). The user may choose to track the BLER per PS interactive type or collectively.

Calculation

$$\text{AGGR}(\text{RABType}[\text{subString}(\text{LocalKey}, 0, 6) == \text{"PACKET"}], \text{Uplink_BLER})$$

Uplink_PS_Streaming_16_64_and_PS8_BLER

Transport block error rate after combining at RNC in uplink for PS streaming+ Packet 8kbps (UeRc = 13).

Calculation

```
AGGR(RABType[LocalKey == "PS_STREAMING_16_64_PACKET_8KBPS"],Uplink_BLER)
```

Uplink_Speech_and_PS64_BLER

Transport block error rate after combining at RNC in uplink for PS interactive (UeRc = 10).

Calculation

```
AGGR(RABType[LocalKey == "SPEECH_AND_PACKET_64_KBPS"],Uplink_BLER)
```

Uplink_Speech_BLER

The transport block error rate after combining at RNC in uplink for speech (UeRc = 2).

Calculation

```
AGGR(RABType[LocalKey == "SPEECH"],Uplink_BLER)
```

RNC Peg Counts

The following is a list of peg counts for the RNC entity.

activeQueueMgmt

Determines if active queue management (early congestion detection and selective dropping of packets) is turned on or off for all PS Interactive RABs. { OnOffVals, Default= OFF }

Data Source

Bulk CM

Source Section

RabHandling

adjustmentPeriod

System constant. { long, Default=8 }

Data Source

Bulk CM

Source Section

PowerControl

adjustmentRatio

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

aliasPlmnIdentities

List of alias PLMN identities to the PLMN id of this RNC (defined in RncFunction). Defines allowed roamers between UTRAN networks to support shared networks. { sequence<PlmnIdentity,30>, Default = empty, Default= }

Data Source

Bulk CM

Source Section

RncFunction

allow384HsRab

Switch to enable/disable the use of UL 384/HS kbps RAB in the RNC. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

RncFunction

allowSwitchToCommon

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

ChannelSwitching

altitude

Altitude of the UE reference position, independent of whether the pre-estimate is successful or the RNC instead uses a fall-back position. Altitudes larger than 32767 meters are represented as 32767 meters. { long, Range = 0..32767, Default=Mandatory }

Data Source

Bulk CM

Source Section

AgpsPositioning

amountOfReporting1a

System constant. { long, Default=7 }

Data Source

Bulk CM

Source Section

UeMeasControl

amountOfReporting1c

System constant. { long, Default=7 }

Data Source

Bulk CM

Source Section

UeMeasControl

asCellSyncInfoRepInd

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

bandwidthMargin

System constant. { long, Default=90 }

Data Source

Bulk CM

Source Section

ChannelSwitching

bandwidthMarginUI

UL throughput threshold defining a high utilisation of the radio bearer

Data Source

Bulk CM

Source Field

es:bandwidthMarginUI

Source Section

ChannelSwitching

bcchModCycleLength

System constant. { long, Default=9 }

Data Source

Bulk CM

Source Section

Paging

betaPrachControlTf0

System constant. { long, Default=11 }

Data Source

Bulk CM

Source Section

PowerControl

betaPrachControlTf1

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

PowerControl

betaPrachDataTf0

System constant. { long, Default=15 }

Data Source

Bulk CM

Source Section

PowerControl

betaPrachDataTf1

System constant. { long, Default=15 }

Data Source

Bulk CM

Source Section

PowerControl

blerCorrectionFactor

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

PowerControl

cBackOff

The purpose of this constant is to back off the open loop power control estimate to a conservative starting point. { long, Range = -60..60, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

cchWaitCuT

Waiting timer for cell update

Data Source

Bulk CM

Source Field

es:cchWaitCuT

Source Section

Rcs

cCM

System constant. { long, Default=4 }

Data Source

Bulk CM

Source Section

PowerControl

cellListAtRemovalDelay

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

Handover

ciphering

Indicates whether ciphering is used or not. { long, Range = 0..1, Default=1 }

Data Source

Bulk CM

Source Section

SecurityHandling

cipheringGuardTime

System constant. { long, Default=80 }

Data Source

Bulk CM

Source Section

SecurityHandling

cNbifho

Factor used to take into account the non-blind inter-frequency handover margin. { long, Range = -50..150, Default=10 }

Data Source

Bulk CM

Source Section

PowerControl

cnDrxCycleLengthCs

Core Network DRX cycle length coefficient (k) for UEs in idle mode, circuit switched. { long, Range = 6..9, Default=6 }

Data Source

Bulk CM

Source Section

Paging

cnDrxCycleLengthPs

Core Network DRX cycle length coefficient (k) for UEs in idle mode, packet switched. { long, Range = 6..9, Default=7 }

Data Source

Bulk CM

Source Section

Paging

cnhhoSupp

Defines if the feature CN Hard Handover is activated in the RNC

Data Source

Bulk CM

Source Field

es:cnhhoSupp

Source Section

Handover

cnInformation

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

Sid

codePowerPeriod

System constant. { long, Default=200 }

Data Source

Bulk CM

Source Section

PowerControl

comprModeRetryInterv

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

Handover

confidence

Confidence of the UE reference position. This value is only used when the pre-estimate is successful, { long, Range = 0..100, Default=Mandatory }

Data Source

Bulk CM

Source Section

AgpsPositioning

counterAlarmCeaseLimit

Sets the condition for ceasing a minor alarm sent when the limit for maximum number of allowed counter reads is exceeded. The value is in percentage of maximum number of allowed counter reads. { long, Range = 70..99, Default=95 }

Data Source

Bulk CM

Source Section

RncFunction

counterAlarmThreshold

Level at which a warning alarm for too many counter readings shall be issued. { long, Range = 0..100, Default=80 }

Data Source

Bulk CM

Source Section

RncFunction

counterWarningAlarmCeaseLimit

Sets the condition for ceasing a warning alarm. The value is a delta value in percentage. The alarm will be cleared when the number of counter reads is below the warning limit minus this delta value. { long, Range = 1..20, Default=5 }

Data Source

Bulk CM

Source Section

RncFunction

coverageTimer

Time during which the power is allowed to be high before a downswitch (DCH to DCH) is issued. { long, Range = 0..100, Default=10 }

Data Source

Bulk CM

Source Section

ChannelSwitching

cPO

A constant parameter to set the UL DPCCCH power offset to a conservative level. { long, Range = -30..30, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

ctrFileSize

Size of each CTR recording file. { long, Range = 0..60000, Default=5000 }

Data Source

Bulk CM

Source Section

RncFunction

dchRcLostT

Value in deciseconds for a timer that is started when all radio links in a connection is lost. At time-out, the radio connection is considered lost.

Data Source

Bulk CM

Source Field

es:dchRcLostT

Source Section

Rcs

deltaSir1

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

PowerControl

deltaSir2

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

PowerControl

deltaSirAfter1

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

PowerControl

deltaSirAfter2

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

PowerControl

dllInitSirTarget

Required DL Initial SIR target for all RABs. { long, Range = -82..173, Default=41 }

Data Source

Bulk CM

Source Section

PowerControl

dlPcMethod

Selects the DL power control method at establishment of the radio connection. { string, Default= BALANCING }

Data Source

Bulk CM

Source Section

PowerControl

dlRlcBufUpswitch

Downlink threshold for channel switching from FACH/RACH to dedicated channel. { long, Range = 0..2000, Default=500 }

Data Source

Bulk CM

Source Section

ChannelSwitching

dlRlcBufUpswitchMrab

Downlink threshold of the RLC buffer load, used to issue an upswitch request (from "Speech + PS 0/0" to Speech + PS 64/64). { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

ChannelSwitching

dlSfLimitTimer

System constant. { long, Default=20 }

Data Source

Bulk CM

Source Section

PowerControl

doStep

Downlink Offset step size. { long, Range = 0..10, Default=1 }

Data Source

Bulk CM

Source Section

CchFrameSynch

downswitchPwrMargin

Margin, in relation to maximum allowed code power, which indicates a high power usage. { long, Range = 0..20, Default=2 }

Data Source

Bulk CM

Source Section

ChannelSwitching

downswitchThreshold

Threshold for channel switching from dedicated channel to FACH/RACH. { long, Range = 0..32, Default=0 }

Data Source

Bulk CM

Source Section

ChannelSwitching

downswitchTimer

Timer for channel switching from dedicated channel to FACH/RACH. { long, Range = 0..1000, Default=10 }

Data Source

Bulk CM

Source Section

ChannelSwitching

downswitchTimerSp

Time not including data transmission, after which the packet part of the multi RAB "Speech 12.2 kbps + Packet 64/64 kbps" is released. { long, Range = 0..180, Default=60 }

Data Source

Bulk CM

Source Section

ChannelSwitching

downswitchTimerThreshold

Timer threshold to achieve hysteresis for channel switching from dedicated channel to FACH/RACH. { long, Range = 0..64, Default=0 }

Data Source

Bulk CM

Source Section

ChannelSwitching

downswitchTimerUp

Time, not including data transmission, after which the packet part of the multi RAB "UDI+8/8" (Cs Data 64kbps + Packet 8kbps) is released. { long, Range = 0..180, Default=60 }

Data Source

Bulk CM

Source Section

ChannelSwitching

dsCellSyncInfoRepInd

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

dscpValuePsStreaming

DSCP (DiffServ Code Point) value for the PS Streaming RAB Type. { long, Range = 0..63, Default=18 }

Data Source

Bulk CM

Source Section

RabHandling

dto

Downlink Transport delay Offset. Part of the Downlink Offset (DO). { long, Range = 1..200, Default=10 }

Data Source

Bulk CM

Source Section

CchFrameSynch

ecNoPcpichDefault

The default value to be used in power calculations for Ec divided by No. { long, Range = -20..-10, Default=-16 }

Data Source

Bulk CM

Source Section

PowerControl

elevationThreshold

Threshold for satellite elevation. The satellites that are below the elevation threshold will not be used. { long, Range = 0..90, Default=5 }

Data Source

Bulk CM

Source Section

AgpsPositioning

emergencyCallRedirect

Turns on/off the immediate reject of RRC Connection Requests with "establishment cause" set to "emergency between UTRAN networks to support shared networks. { OnOffVals, Default=OFF }

Data Source

Bulk CM

Source Section

RncFunction

enabledPositioningFeatures

Enables and disables the different UE positioning features, which are optional. { string,
Default= NONE }

Data Source

Bulk CM

Source Section

UePositioning

fddGsmHOSupp

Indicates if the RNC supports inter-RAT HO (Inter Radio Access Technology Handover). {
BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

Handover

fddIfhoSupp

Indicates if the RNC supports IFHO. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

Handover

filterCoeff4_2b

Coefficient for layer 3 filtering before inter-frequency reporting evaluation, for measurement 4
event 2b. { long, Range = 0..9, 11, 13, 15, 17, 19, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

filterCoeff6

Coefficient for layer 3 filtering before UE internal measurement reporting evaluation, for event 6a and 6b. { long, Range = 0..9, Default=19 }

Data Source

Bulk CM

Source Section

UeMeasControl

filterCoefficient1

Coefficient for layer 3 filtering before intra-frequency reporting evaluation. { long, Range = 0..9, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

filterCoefficient2

Coefficient for layer 3 filtering before inter-frequency measurement reporting evaluation. { long, Range = 0..9, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

filteringCoefficient

System constant. { long, Default=6 }

Data Source

Bulk CM

Source Section

ChannelSwitching

fixedPowerDL

Fixed DL power used in fixed DL PC method. The power value is expressed relative to the PCPICH power. { long, Range = 1..101, Default=65 }

Data Source

Bulk CM

Source Section

PowerControl

fixedRefPower

Fixed DL reference power used in fixed balancing DL PC method, expressed relative to the PCPICH power. { long, Range = 1..101, Default=65 }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorCExtraHigh

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorCHigh

System constant. { long, Default=8 NoNotification }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorCLow

System constant. { long, Default=11 NoNotification }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorDExtraHigh

System constant. { long, Default=15 }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorDHigh

System constant. { long, Default=15 NoNotification }

Data Source

Bulk CM

Source Section

PowerControl

gainFactorDLow

System constant. { long, Default=15 NoNotification }

Data Source

Bulk CM

Source Section

PowerControl

gpehDataLevel

Determines whether the entire protocol message of the selected GPEH external events should be recorded, or only the header data of the selected external events. { string, Default=HEADER_DATA_ONLY }

Data Source

Bulk CM

Source Section

RncFunction

gpehFileSize

Specifies the size of each GPEH file. { long, Range = 0..50000, Default=500 }

Data Source

Bulk CM

Source Section

RncFunction

gpehStorageSize

System constant. { long, Default=50000 }

Data Source

Bulk CM

Source Section

RncFunction

gsmAmountPropRepeat

Max number of repeated proposals (i.e. not including the first proposal) of GSM cell(s) for handover based on the same measurement report. { long, Range = 0..25, Default=4 }

Data Source

Bulk CM

Source Section

Handover

gsmFilterCoefficient3

Coefficient for layer 3 filtering of GSM quality before inter-RAT reporting evaluation. { long, Range = 0..9,11,13,15,17,19, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

gsmPropRepeatInterval

Minimum time interval between proposals of the same GSM cell for handover based on the same measurement report. { long, Range = 0..25, Default=5 }

Data Source

Bulk CM

Source Section

Handover

gsmThresh3a

Threshold for event 3a for GSM. Range is valid for GSM carrier RSSI. { long, Range = -115..0, Default=-102 }

Data Source

Bulk CM

Source Section

UeMeasControl

gsmTimeDiffRepInd

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hoTypeDrncBand1

Indicates for frequency band 1 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand10

Indicates for frequency band 10 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand11

Indicates for frequency band 11 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand12

Indicates for frequency band 12 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand13

Indicates for Ericsson internal frequency band 13 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default=GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand14

Indicates for Ericsson internal frequency band 14 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default=GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand15

Indicates for Ericsson internal frequency band 15 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand16

Indicates for Ericsson internal frequency band 16 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default=GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand17

Indicates for Ericsson internal frequency band 17 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand2

Indicates for frequency band 2 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand3

Indicates for frequency band 3 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand4

Indicates for frequency band 4 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand5

Indicates for frequency band 5 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand6

Indicates for frequency band 6 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand7

Indicates for frequency band 7 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand8

Indicates for frequency band 8 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hoTypeDrncBand9

Indicates for frequency band 9 for DRNCs if GSM HO, IFHO or nothing shall be attempted, in case both GSM HO and IFHO are possible. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

Handover

hsCellChangeAllowed

Overall On/Off switch for serving HS-DSCH cell change. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

RncFunction

hsCellChangeCfnOffset

System constant. { long, Default=100 }

Data Source

Bulk CM

Source Section

RncFunction

hsdschInactivityTimer

Timer for sending of IU RELEASE REQUEST message to the CN for UE connections in RAB state PS Interactive 64/HS - HS-DSCH. { long, Range = 1..255, Default=10, 7200, }

Data Source

Bulk CM

Source Section

ChannelSwitching

hsDschRcLostT

Value in deciseconds for RCS timer for supervision of UL synch of RLS containing the serving HS-DSCH Radio Link

Data Source

Bulk CM

Source Field

es:hsDschRcLostT

Source Section

Rcs

hsHysteresis1d

Sets the Event 1D hysteresis value specific for HS connections { long, Range = 0..75, Default=10 }

Data Source

Bulk CM

Source Section

UeMeasControl

hsMacdSwitchTimeOffset

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

RncFunction

hsOnlyBestCell

RNC wide switch for selecting only the best cell for HS. { BooleanVals, Default= TRUE }

Data Source

Bulk CM

Source Section

RncFunction

hsQualityEstimate

Indicates whether it is CPICH Ec/N0 or CPICH RSCP that should be used for indicating "best cell" for HSDSCH cell selection and HS-DSCH cell change { string, Default= CPICH_RSCP }

Data Source

Bulk CM

Source Section

UeMeasControl

hsTimeToTrigger1d

Sets the Event 1D Time to Trigger value specific for HS connections { long, Range =, Default=640 }

Data Source

Bulk CM

Source Section

UeMeasControl

hyst4_2b

Hysteresis for measurement 4 event 2b. { long, Range = 0..75, Default=10 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis1a

Hysteresis used in addition-window in evaluation criteria for event 1a to avoid ping pong effects. Used by UE functions for intra-frequency measurement reporting in CELL_DCH. { long, Range = 0..15, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis1b

Hysteresis used in the drop window in evaluation criteria for event type 1b. Used by UE functions for intrafrequency measurement reporting in CELL_DCH. { long, Range = 0..15, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis1c

Used by UE functions for intra-frequency measurement reporting (in CELL_DCH). Hysteresis used in replacement threshold in evaluation criteria for event 1c to avoid ping pong effects. { long, Range = 0..15, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis1d

Used by UE functions for intra-frequency measurement reporting (in CELL_DCH). Hysteresis used in dropwindow in evaluation criteria for event type 1d. { long, Range = 0..15, Default=15 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis2d

Hysteresis for event 2d. { long, Range = 0..29, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis2f

Hysteresis for event 2f. { long, Range = 0..29, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresis3a

Hysteresis for event 3a. { long, Range = 0..15, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

hysteresisSiUpdate

System constant. { long, Default=30 }

Data Source

Bulk CM

Source Section

PowerControl

ifhoAmountPropRepeat

Maximum number of repeated proposals of non-used frequency cell(s) for handover based on the same measurement report. { long, Range = 0..25, Default=4 }

Data Source

Bulk CM

Source Section

Handover

ifhoPropRepeatInterval

Minimum time interval between proposals of the same non-used frequency cell for handover based on the same measurement report. { long, Range = 0..25, Default=5 }

Data Source

Bulk CM

Source Section

Handover

inactivityTimer

Timer for sending of IU RELEASE REQUEST message to the CN for UEs in state CELL_FACH. { long, Range = 1..1440, Default=30 }

Data Source

Bulk CM

Source Section

ChannelSwitching

inactivityTimerDch

System constant. { long, Default=30 }

Data Source

Bulk CM

Source Section

ChannelSwitching

initialCellListDelay

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

Handover

initShoPowerParam

Correction of initial downlink power at soft handover RL setup. { long, Range = -20..20, Default=-2 }

Data Source

Bulk CM

Source Section

PowerControl

interFreqCnhhoPenaltyEcno

Defines how much penalty shall be given to a non-Iur external UTRAN cell compared to a normal interfrequency cell during Ec/No evaluation.

Data Source

Bulk CM

Source Field

es:interFreqCnhhoPenaltyEcno

Source Section

Handover

interFreqCnhhoPenaltyRscp

Defines how much penalty shall be given to a non-Iur external UTRAN cell compared to a normal interfrequency cell during RSCP evaluation.

Data Source

Bulk CM

Source Field

es:interFreqCnhhoPenaltyRscp

Source Section

Handover

intraFreqCnhhoPenalty

Defines how much penalty shall be given to a non-Iur external UTRAN cell compared to a normal intrafrequency cell. Dependencies: The value to chose depends on the setting of the parameter measQuantity1 (which indicate if there are Ec/No or RSCP measurements which should be used).

Data Source

Bulk CM

Source Field

es:intraFreqCnhhoPenalty

Source Section

Handover

intraFreqCnhhoWeight

Defines the weight of the radio links in the active set, when comparing them to an intra-frequency CN Hard Handover candidate. intraFreqCnhhoWeight=0 means that only the best cell in AS is considered, intraFreqCnhhoWeight>0 means that all radio links in the active set are considered, while intraFreqCnhhoWeight=10 means that all radio links in the active set are given equal importance.

Data Source

Bulk CM

Source Field

es:intraFreqCnhhoWeight

Source Section

Handover

itp

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

loadSharingDirRetryEnabled

Indicates whether the Load Sharing via Directed Retry to GSM function has been enabled in the RNC. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

RncFunction

loadSharingRrcEnabled

Indicates whether the Inter-Frequency Load Sharing function has been enabled in the RNC. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

RncFunction

loadSharingThreshold

System constant. { long, Default=20 }

Data Source

Bulk CM

Source Section

RncFunction

maxActiveSet

Maximum number of cells in active set. { long, Range = 2..4, Default=3 }

Data Source

Bulk CM

Source Section

Handover

maxAdjustmentStep

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

PowerControl

maxBufferTime

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

Handover

maxGsmMonSubset

Maximum number of GSM cells that the UE shall measure on. { long, Range = 1..32, Default=32 }

Data Source

Bulk CM

Source Section

Handover

maxIefMonSubset

Maximum number of inter-frequency cells that the UE shall measure on. { long, Range = 1..32, Default=32 }

Data Source

Bulk CM

Source Section

Handover

maxNumberRepCells1a

System constant. { long, Default=3 }

Data Source

Bulk CM

Source Section

UeMeasControl

maxNumberRepCells1c

System constant. { long, Default=3 }

Data Source

Bulk CM

Source Section

UeMeasControl

maxNumberRepCells1d

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

maxNumberRepCells3a

System constant. { long, Default=4 }

Data Source

Bulk CM

Source Section

UeMeasControl

maxNumbRepCells4_2b

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

maxSohoListSubset

System constant. { long, Default=32 }

Data Source

Bulk CM

Source Section

Handover

mcc_CM

Mobile Country Code, MCC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:mcc

Source Section

RncFunction

measQuantity1

Used by UE functions for intra-frequency measurements (in CELL_DCH). Quantity to measure for the chosen mode. The value of this attribute will set the message data CPICH_Ec/No or CPICH_RSCP accordingly. { string, Default= CPICH_EC_NO }

Data Source

Bulk CM

Source Section

UeMeasControl

mnc_CM

Mobile Network Code, MNC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:mnc

Source Section

RncFunction

mncLength

The length of the MNC part of the PLMN identity used in the radio network. { long, Range = 2..3, Default=2 }

Data Source

Bulk CM

Source Section

RncFunction

msCellSyncInfoRepInd

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

multiRabSp0Available

Controls whether RAB Establishment and Channel Switching are allowed to switch to SP0 or not. { long, Range = 0..1, Default=0 }

Data Source

Bulk CM

Source Section

ChannelSwitching

multiRabUdi8Available

Controls the RNC support for the feature UDI+8/8 (Cs Data 64kbps + Packet 8kbps). When set to OFF, a { OnOffVals, Default=OFF }

Data Source

Bulk CM

Source Section

ChannelSwitching

n300

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

Rrc

n302

System constant. { long, Default=3 }

Data Source

Bulk CM

Source Section

Rrc

n308

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

Rrc

n313

System constant. { long, Default=100 }

Data Source

Bulk CM

Source Section

Rrc

n315

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

Rrc

netwResourceIdentifierLengthCs

Bitmask length of the NRI for CS/MS. 0 (default) means no Iu Flex active to be used for Iu Flex.

Data Source

Bulk CM

Source Field

es:networkResourceIdentifierLengthCs

Source Section

RncFunction

netwResourceIdentifierLengthPs

Bitmask length of the NRI for PS/SGSN. 0 (default) means no Iu Flex active to be used for Iu Flex.

Data Source

Bulk CM

Source Field

es:networkResourceIdentifierLengthPs

Source Section

RncFunction

nonUsedFreqThresh4_2bEcno

Threshold for measurement 4 event 2b for the non-used frequencies when the measurement quantity is Ec/No. { long, Range = -24..0, Default=-13 }

Data Source

Bulk CM

Source Section

UeMeasControl

nonUsedFreqThresh4_2bRscp

Threshold for measurement 4 event 2b for the non-used frequencies when the measurement quantity is RSCP. { long, Range = -115..-25, Default=-105 }

Data Source

Bulk CM

Source Section

UeMeasControl

nonUsedFreqW4_2b

Weighting factor for measurement 4 event 2b for the non-used frequencies. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

noOfCountersAllowed

System constant. { long, Default=215000 }

Data Source

Bulk CM

Source Section

RncFunction

noOfMaxDrxCycles

Paging notification duration. { long, Range = 1..10, Default=1 }

Data Source

Bulk CM

Source Section

Sid

noOfMibValueTagRetrans

Number of MIB value tag retransmissions on the FACH. { long, Range = 0..10, Default=0 }

Data Source

Bulk CM

Source Section

Sid

noOfPagingRecordTransm

Number of preconfigured subsequent transmissions of the same Paging Record. { long, Range = 1..5, Default=2 }

Data Source

Bulk CM

Source Section

Paging

packetEstMode

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

Rrc

pcpichPowerDefault

Default primary CPICH power. If the primary CPICH power is not provided from DRNC, DPCCH_Power_Offset is calculated using the parameter. { long, Range = 0..50, Default=33 }

Data Source

Bulk CM

Source Section

PowerControl

pendingTimeAfterTrigger

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

ChannelSwitching

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RNC_WMGeneral

pmCnInitPagingToIdleUe

Number of CN-init pages without paging area ID sent to Idle mode UEs.

Data Source

NodeB_RNC_RXI

Source Field

pmCnInitPagingToIdleUe

Source Section

Paging

pmCsCnDowntime

The CS-CN downtime in seconds.

Data Source

RNC

Source Field

pmCsCnDowntime

Source Section

RncFunction

pmIntegrityFailureRrcMsg

Number of uplink RRC messages discarded due to integrity failure.

Data Source

NodeB_RNC_RXI

Source Field

pmIntegrityFailureRrcMsg

Source Section

SecurityHandling

pmMocnRedirections

Number of MOCN Redirection indications received from the core network when MOCN is active.

Data Source

RNC

Source Field

pmMocnRedirections

Source Section

RncFunction

pmNoCchDiscardedDataFramesE

Number of discarded DL data frames due to too-early reception for FACH and PCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCchDiscardedDataFramesE

Source Section

CchFrameSynch

pmNoCchDiscardedDataFramesL

Number of discarded DL data frames due to too-late reception for FACH and PCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCchDiscardedDataFramesL

Source Section

CchFrameSynch

pmNoCchTimingAdjContrFrames

Number of received Downlink Timing Adjustment Control Frames for FACH and PCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCchTimingAdjContrFrames

Source Section

CchFrameSynch

pmNoDiscardSduDcch

Number of discarded RLC SDUs for DCCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDiscardSduDcch

Source Section

RncFunction

pmNoDiscardSduDtch

Number of discarded RLC SDUs for DTCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDiscardSduDtch

Source Section

RncFunction

pmNoInvalidRabEstablishAttempts

Number of invalid RAB establishment attempts

Data Source

NodeB_RNC_RXI

Source Field

pmNoInvalidRabEstablishAttempts

Source Section

RncFunction

pmNoInvalidRabReleaseAttempts

Number of invalid RAB release attempts

Data Source

NodeB_RNC_RXI

Source Field

pmNoInvalidRabReleaseAttempts

Source Section

RncFunction

pmNoIuSigEstablishAttemptCs

Number of IU signalling connection setup attempts towards the CS domain.

Data Source

RNC

Source Field

pmNoIuSigEstablishAttemptCs

Source Section

RncFunction

pmNoIuSigEstablishAttemptPs

Number of IU signalling connection setup attempts towards the PS domain.

Data Source

RNC

Source Field

pmNoIuSigEstablishAttemptPs

Source Section

RncFunction

pmNoIuSigEstablishSuccessCs

Number of successful IU signalling connection setups towards the CS domain

Data Source

RNC

Source Field

pmNoIuSigEstablishSuccessCs

Source Section

RncFunction

pmNoIuSigEstablishSuccessPs

Number of successful IU signalling connection setups towards the PS domain.

Data Source

RNC

Source Field

pmNoIuSigEstablishSuccessPs

Source Section

RncFunction

pmNoOfPacketCallDuration1

Accumulated number of RAB activity periods for bursts of size between 200 bytes and 1 kbyte.

Data Source

RNC

Source Field

pmNoOfPacketCallDuration1

Source Section

RncFunction

pmNoOfPacketCallDuration2

Accumulated number of RAB activity periods for bursts of size between 1KB - 10KB

Data Source

RNC

Source Field

pmNoOfPacketCallDuration2

Source Section

RncFunction

pmNoOfPacketCallDuration3

Accumulated number of RAB activity periods for bursts of size between 10 kbyte and 100 kbytes

Data Source

RNC

Source Field

pmNoOfPacketCallDuration3

Source Section

RncFunction

pmNoOfPacketCallDuration4

Accumulated number of RAB activity periods for bursts of size greater than 100 kbytes

Data Source

RNC

Source Field

pmNoOfPacketCallDuration4

Source Section

RncFunction

pmNoOfPacketCallDurationHs1

Accumulated number of RAB activity periods for bursts of size between 200 bytes and 1 kbyte for all interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmNoOfPacketCallDurationHs1

Source Section

RncFunction

pmNoOfPacketCallDurationHs2

Accumulated number of RAB activity periods for bursts of size between 1KB - 10KB for all interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmNoOfPacketCallDurationHs2

Source Section

RncFunction

pmNoOfPacketCallDurationHs3

Accumulated number of RAB activity periods for bursts of size between 10KB - 100KB for all interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmNoOfPacketCallDurationHs3

Source Section

RncFunction

pmNoOfPacketCallDurationHs4

Accumulated number of RAB activity periods for bursts of size More than 100KB for all interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmNoOfPacketCallDurationHs4

Source Section

RncFunction

pmNoOfRedirectedEmergencyCalls

Number of rejected RRC connection setups due to emergency calls

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRedirectedEmergencyCalls

Source Section

RncFunction

pmNoPageDiscardCmpLoadC

Number of pages discarded due to central MP load control.

Data Source

NodeB_RNC_RXI

Source Field

pmNoPageDiscardCmpLoadC

Source Section

Paging

pmNoRabEstablishFailureUeCapability

Number of failed RAB establishments due to insufficient UE capabilities

Data Source

RNC

Source Field

pmNoRabEstablishFailureUeCapability

Source Section

RncFunction

pmNoReceivedSduDcch

Number of received RLC SDUs including discarded SDUs for DCCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoReceivedSduDcch

Source Section

RncFunction

pmNoReceivedSduDtch

Number of received RLC SDUs including discarded SDUs for DTCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoReceivedSduDtch

Source Section

RncFunction

pmNoReleaseCchWaitCuT

Number of overall releases triggered by cchWaitCuT expiry.

Data Source

NodeB_RNC_RXI

Source Field

pmNoReleaseCchWaitCuT

Source Section

Rcs

pmNoReleaseDchRcLostT

Number of overall releases triggered by dchRcLostT expiry.

Data Source

NodeB_RNC_RXI

Source Field

pmNoReleaseDchRcLostT

Source Section

Rcs

pmNoRetransPduDcch

Number of retransmitted RLC PDUs for DCCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRetransPduDcch

Source Section

RncFunction

pmNoRetransPduDtch

Number of retransmitted RLC PDUs for DTCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRetransPduDtch

Source Section

RncFunction

pmNoRlcErrors

Number of RLC unrecoverable errors (UTRAN) for UEs on FACH or DCH.

Data Source

NodeB_RNC_RXI

Source Field

pmNoRlcErrors

Source Section

Rcs

pmNoSbHoMeasStart

Total number of started Service Based GSM Handover measurements per RNC.

Source Field

pmNoSbHoMeasStart

Source Section

Handover

pmNoSentPduDcch

Number of sent RLC PDUs for DCCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoSentPduDcch

Source Section

RncFunction

pmNoSentPduDtch

Number of sent RLC PDUs for DTCHs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoSentPduDtch

Source Section

RncFunction

pmNoSuccessSbHo

Total number of successful outgoing Service Based GSM Handover per RNC.

Source Field

pmNoSuccessSbHo

Source Section

Handover

pmPositioningReqAtt

(Retired on P6)Number of attempted positioning requests from the CN.

Data Source

NodeB_RNC_RXI

Source Field

pmPositioningReqAtt

Source Section

RncFunction

pmPositioningReqAttAgps

(Retired on P6)Number of UE positioning attempts for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqAttAgps

Source Section

AgpsPositioning

pmPositioningReqAttCellId

(Retired on P6)Number of UE positioning attempts for which the Cell ID method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqAttCellId

Source Section

UePositioning

pmPositioningReqAttEsAgps

(Retired on P6)Number of UE emergency services positioning attempts for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqAttEsAgps

Source Section

AgpsPositioning

pmPositioningReqAttEsCellId

(Retired on P6)Number of UE emergency services positioning attempts for which the Cell ID method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqAttEsCellId

Source Section

UePositioning

pmPositioningReqReAttCellId

(Retired on P6)Number of UE positioning re-attempts for which the Cell Id method was selected for the re-attempt.

Data Source

RNC

Source Field

pmPositioningReqReAttCellId

Source Section

UePositioning

pmPositioningReqReAttEsCellId

(Retired on P6)Number of UE emergency services positioning reattempts for which the Cell ID method was selected for the re-attempt.

Data Source

RNC

Source Field

pmPositioningReqReAttEsCellId

Source Section

UePositioning

pmPositioningReqReAttSuccCellId

(Retired on P6)Number of successful UE positioning reattempts for which the Cell Id method was selected for the re-attempt.

Data Source

RNC

Source Field

pmPositioningReqReAttSuccCellId

Source Section

UePositioning

pmPositioningReqSucc

(Retired on P6)Number of successful positioning requests from the CN.

Data Source

NodeB_RNC_RXI

Source Field

pmPositioningReqSucc

Source Section

RncFunction

pmPositioningReqSuccAgps

(Retired on P6)Number of successful UE positioning attempts for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccAgps

Source Section

AgpsPositioning

pmPositioningReqSuccAgpsQosSucc

(Retired on P6)Number of successful UE positioning attempts with requested QoS fulfilled, for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccAgpsQosSucc

Source Section

AgpsPositioning

pmPositioningReqSuccCellId

(Retired on P6)Number of successful UE positioning attempts for which the Cell ID method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccCellId

Source Section

UePositioning

pmPositioningReqSuccCellIdQoS Succ

(Retired on P6)Number of successful UE positioning attempts with requested QoS fulfilled, for which the Cell ID method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccCellIdQoS Succ

Source Section

UePositioning

pmPositioningReqSuccEsAgps

(Retired on P6)Number of successful UE emergency services positioning attempts for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccEsAgps

Source Section

AgpsPositioning

pmPositioningReqSuccEsAgpsQoS Succ

(Retired on P6)Number of successful UE emergency services positioning attempts with requested QoS fulfilled, for which the A-GPS method was selected for the initial attempt (re-attempts excluded).

Data Source

RNC

Source Field

pmPositioningReqSuccEsAgpsQosSucc

Source Section

AgpsPositioning

pmPositioningReqUnsuccAgpsAbort

(Retired on P6) Number of UE positioning attempts for which the A-GPS method was selected for the initial attempt, and the attempt was aborted or stopped by the CN, for example due to a release request from CN, IRAT Handover to GSM or when the CN requests

Data Source

RNC

Source Field

pmPositioningReqUnsuccAgpsAbort

Source Section

AgpsPositioning

pmSamplesDchDchDIRcvDelay_0

Number of samples in pmSumDchDchDIRcvDelay (that is, pmSamplesDchDchDIRcvDelay = pmSumDchDchDIRcvDelay + 1, whenever pmSumDchDchDIRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchDIRcvDelay

Source Section

RncFunction

pmSamplesDchDchDIRcvDelay_1

Number of samples in pmSumDchDchDIRcvDelay (that is, pmSamplesDchDchDIRcvDelay = pmSumDchDchDIRcvDelay + 1, whenever pmSumDchDchDIRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchDIRcvDelay

Source Section

RncFunction

pmSamplesDchDchDIRcvDelay_2

Number of samples in pmSumDchDchDIRcvDelay (that is, pmSamplesDchDchDIRcvDelay = pmSumDchDchDIRcvDelay +1, whenever pmSumDchDchDIRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchDIRcvDelay

Source Section

RncFunction

pmSamplesDchDchJitter

Number of samples in pmSumDchDchJitter (that is, pmSamplesDchDchJitter = pmSumDchDchJitter +1, whenever pmSumDchDchJitter is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesDchDchJitter

Source Section

RncFunction

pmSamplesDchDchLatency_0

Number of samples in pmSumDchDchLatency (that is, pmSamplesDchDchLatency = pmSumDchDchLatency +1, whenever pmSumDchDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchLatency

Source Section

RncFunction

pmSamplesDchDchLatency_1

Number of samples in pmSumDchDchLatency (that is, pmSamplesDchDchLatency = pmSamplesDchDchLatency +1, whenever pmSumDchDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchLatency

Source Section

RncFunction

pmSamplesDchDchLatency_2

Number of samples in pmSumDchDchLatency (that is, pmSamplesDchDchLatency = pmSamplesDchDchLatency +1, whenever pmSumDchDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDchLatency

Source Section

RncFunction

pmSamplesDchDlDelay_0

Number of samples in pmSumDchDlDelay (that is, pmSamplesDchDlDelay = pmSamplesDchDlDelay +1, whenever pmSumDchDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDlDelay

Source Section

RncFunction

pmSamplesDchDlDelay_1

Number of samples in pmSumDchDlDelay (that is, pmSamplesDchDlDelay = pmSamplesDchDlDelay +1, whenever pmSumDchDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDlDelay

Source Section

RncFunction

pmSamplesDchDlDelay_2

Number of samples in pmSumDchDlDelay (that is, pmSamplesDchDlDelay = pmSamplesDchDlDelay +1, whenever pmSumDchDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDlDelay

Source Section

RncFunction

pmSamplesHsDchDlRcvDelay_0

Number of samples in pmSumHsDchDlRcvDelay (that is, pmSamplesHsDchDlRcvDelay = pmSamplesHsDchDlRcvDelay +1, whenever pmSumHsDchDlRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchDIRcvDelay

Source Section

RncFunction

pmSamplesHsDchDIRcvDelay_1

Number of samples in pmSumHsDchDIRcvDelay (that is, pmSamplesHsDchDIRcvDelay = pmSamplesHsDchDIRcvDelay +1, whenever pmSumHsDchDIRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchDIRcvDelay

Source Section

RncFunction

pmSamplesHsDchDIRcvDelay_2

Number of samples in pmSumHsDchDIRcvDelay (that is, pmSamplesHsDchDIRcvDelay = pmSamplesHsDchDIRcvDelay +1, whenever pmSumHsDchDIRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchDIRcvDelay

Source Section

RncFunction

pmSamplesHsDchJitter

Number of samples in pmSumHsDchJitter (that is, pmSamplesHsDchJitter = pmSamplesHsDchJitter +1, whenever pmSumHsDchJitter is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesHsDchJitter

Source Section

RncFunction

pmSamplesHsDchLatency_0

Number of samples in pmSumHsDchLatency (i.e. pmSamplesHsDchLatency = pmSamplesHsDchLatency +1, whenever pmSumHsDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchLatency

Source Section

RncFunction

pmSamplesHsDchLatency_1

Number of samples in pmSumHsDchLatency (i.e. pmSamplesHsDchLatency = pmSamplesHsDchLatency +1, whenever pmSumHsDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchLatency

Source Section

RncFunction

pmSamplesHsDchLatency_2

Number of samples in pmSumHsDchLatency (i.e. pmSamplesHsDchLatency = pmSamplesHsDchLatency +1, whenever pmSumHsDchLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDchLatency

Source Section

RncFunction

pmSamplesHsDlDelay_0

Number of samples in pmSumHsDlDelay (that is, pmSamplesHsDlDelay = pmSamplesHsDlDelay +1, whenever pmSumHsDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDlDelay

Source Section

RncFunction

pmSamplesHsDlDelay_1

Number of samples in pmSumHsDlDelay (that is, pmSamplesHsDlDelay = pmSamplesHsDlDelay +1, whenever pmSumHsDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDlDelay

Source Section

RncFunction

pmSamplesHsDlDelay_2

Number of samples in pmSumHsDlDelay (that is, pmSamplesHsDlDelay = pmSamplesHsDlDelay +1, whenever pmSumHsDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsDlDelay

Source Section

RncFunction

pmSamplesHsEulDlRcvDelay_0

Number of samples in pmSumHsEulDlRcvDelay (that is, pmSamplesHsEulDlRcvDelay = pmSamplesHsEulDlRcvDelay +1, whenever pmSumHsEulDlRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulDlRcvDelay

Source Section

RncFunction

pmSamplesHsEulDlRcvDelay_1

Number of samples in pmSumHsEulDlRcvDelay (that is, pmSamplesHsEulDlRcvDelay = pmSamplesHsEulDlRcvDelay +1, whenever pmSumHsEulDlRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulDlRcvDelay

Source Section

RncFunction

pmSamplesHsEulDlRcvDelay_2

Number of samples in pmSumHsEulDlRcvDelay (that is, pmSamplesHsEulDlRcvDelay = pmSamplesHsEulDlRcvDelay +1, whenever pmSumHsEulDlRcvDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulDIRcvDelay

Source Section

RncFunction

pmSamplesHsEulJitter

Number of samples in pmSumHsEulJitter (that is, pmSamplesHsEulJitter = pmSamplesHsEulJitter +1, whenever pmSumHsEulJitter is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulJitter

Source Section

RncFunction

pmSamplesHsEulLatency_0

Number of samples in pmSumHsEulLatency (that is, pmSamplesHsEulLatency = pmSamplesHsEulLatency +1, whenever pmSumHsEulLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulLatency

Source Section

RncFunction

pmSamplesHsEulLatency_1

Number of samples in pmSumHsEulLatency (that is, pmSamplesHsEulLatency = pmSamplesHsEulLatency +1, whenever pmSumHsEulLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulLatency

Source Section

RncFunction

pmSamplesHsEulLatency_2

Number of samples in pmSumHsEulLatency (that is, pmSamplesHsEulLatency = pmSamplesHsEulLatency +1, whenever pmSumHsEulLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesHsEulLatency

Source Section

RncFunction

pmSentPacketData1

Accumulated amount (in bytes) of user data transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketData1

Source Section

RncFunction

pmSentPacketData2

Accumulated amount (in bytes) of user data transmitted in bursts of size between 1 kbyte and 10 kbytes for all Interactive RABs, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketData2

Source Section

RncFunction

pmSentPacketData3

Accumulated amount (in bytes) of user data transmitted in bursts of size between 10 kbyte and 100 kbytes for all Interactive RABs, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketData3

Source Section

RncFunction

pmSentPacketData4

Accumulated amount (in bytes) of user data transmitted in bursts of size greater than 100 kbytes for all Interactive RABs, not including retransmissions

Data Source

RNC

Source Field

pmSentPacketData4

Source Section

RncFunction

pmSentPacketDataHs1

Accumulated amount (in bytes) of user data transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs on HSDPA, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketDataHs1

Source Section

RncFunction

pmSentPacketDataHs2

Accumulated amount (in bytes) of user data transmitted in bursts of size between 1 kbyte and 10 kbytes for all Interactive RABs on HSDPA, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketDataHs2

Source Section

RncFunction

pmSentPacketDataHs3

Accumulated amount (in bytes) of user data transmitted in bursts of size between 10 kbytes and 100 kbytes for all Interactive RABs on HSDPA, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketDataHs3

Source Section

RncFunction

pmSentPacketDataHs4

Accumulated amount (in bytes) of user data transmitted in bursts of size greater size than 100 kbytes for all Interactive RABs on HSDPA, not including retransmissions.

Data Source

RNC

Source Field

pmSentPacketDataHs4

Source Section

RncFunction

pmSentPacketDataInclRetrans1

Accumulated amount (in bytes) of user data transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs, including retransmitted data over the radio.

Data Source

RNC

Source Field

pmSentPacketDataInclRetrans1

Source Section

RncFunction

pmSentPacketDataInclRetrans2

Accumulated amount (in bytes) of user data transmitted in bursts of size between 1 kbyte and 10 kbytes for all Interactive RABs, including retransmitted data over the radio.

Data Source

RNC

Source Field

pmSentPacketDataInclRetrans2

Source Section

RncFunction

pmSentPacketDataInclRetrans3

Accumulated amount (in bytes) of user data transmitted in bursts of size between 10 kbyte and 100 kbytes for all Interactive RABs, including retransmitted data over the radio

Data Source

RNC

Source Field

pmSentPacketDataInclRetrans3

Source Section

RncFunction

pmSentPacketDataInclRetrans4

Accumulated amount (in bytes) of user data transmitted in bursts of size greater than 100 kbytes for all Interactive RABs, including retransmitted data over the radio

Data Source

RNC

Source Field

pmSentPacketDataInclRetrans4

Source Section

RncFunction

pmSentPacketDataInclRetransHs1

Accumulated amount (in bytes) of user data transmitted in bursts of size between 200 bytes and 1 kbyte, for all Interactive RABs on HSDPA, including retransmitted data.

Data Source

RNC

Source Field

pmSentPacketDataInclRetransHs1

Source Section

RncFunction

pmSentPacketDataInclRetransHs2

Accumulated amount (in bytes) of user data transmitted in bursts of size between 1 kbytes and 10 kbyte, for all Interactive RABs on HSDPA, including retransmitted data.

Data Source

RNC

Source Field

pmSentPacketDataInclRetransHs2

Source Section

RncFunction

pmSentPacketDataInclRetransHs3

Accumulated amount (in bytes) of user data transmitted in bursts of size More than 100KB , for all Interactive RABs on HSDPA, including retransmitted data.

Data Source

RNC

Source Field

pmSentPacketDataInclRetransHs3

Source Section

RncFunction

pmSentPacketDataInclRetransHs4

Accumulated amount (in bytes) of user data transmitted in bursts of size between 200 bytes and 1 kbyte, for all Interactive RABs on HSDPA, including retransmitted data.

Data Source

RNC

Source Field

pmSentPacketDataInclRetransHs4

Source Section

RncFunction

pmSumDchDchDirCvDelay_0

Aggregate of RAN SDU receive delay for PS Interactive R99 DCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchDIRcvDelay

Source Section

RncFunction

pmSumDchDchDIRcvDelay_1

Aggregate of RAN SDU receive delay for PS Interactive R99 DCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchDIRcvDelay

Source Section

RncFunction

pmSumDchDchDIRcvDelay_2

Aggregate of RAN SDU receive delay for PS Interactive R99 DCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchDIRcvDelay

Source Section

RncFunction

pmSumDchDchJitter

Aggregate of the RAN SDU Jitter for PS Interactive R99 DCH on DL, R99 DCH on UL.

Data Source

RNC

Source Field

pmSumDchDchJitter

Source Section

RncFunction

pmSumDchDchLatency_0

Aggregate of RAN SDU Latency for R99 PS Interactive DCH on downlink, R99 PS Interactive DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchLatency

Source Section

RncFunction

pmSumDchDchLatency_1

Aggregate of RAN SDU Latency for R99 PS Interactive DCH on downlink, R99 PS Interactive DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchLatency

Source Section

RncFunction

pmSumDchDchLatency_2

Aggregate of RAN SDU Latency for R99 PS Interactive DCH on downlink, R99 PS Interactive DCH on uplink.

Data Source

RNC

Source Field

pmSumDchDchLatency

Source Section

RncFunction

pmSumDchDlDelay_0

Aggregate of RAN SDU delay for Packet Interactive R99 DCH on downlink.

Data Source

RNC

Source Field

pmSumDchDlDelay

Source Section

RncFunction

pmSumDchDlDelay_1

Aggregate of RAN SDU delay for Packet Interactive R99 DCH on downlink.

Data Source

RNC

Source Field

pmSumDchDlDelay

Source Section

RncFunction

pmSumDchDlDelay_2

Aggregate of RAN SDU delay for Packet Interactive R99 DCH on downlink.

Data Source

RNC

Source Field

pmSumDchDlDelay

Source Section

RncFunction

pmSumHsDchDIRcvDelay_0

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchDIRcvDelay

Source Section

RncFunction

pmSumHsDchDIRcvDelay_1

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchDIRcvDelay

Source Section

RncFunction

pmSumHsDchDIRcvDelay_2

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchDIRcvDelay

Source Section

RncFunction

pmSumHsDchJitter

Aggregate of the RAN SDU jitter for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchJitter

Source Section

RncFunction

pmSumHsDchLatency_0

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchLatency

Source Section

RncFunction

pmSumHsDchLatency_1

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchLatency

Source Section

RncFunction

pmSumHsDchLatency_2

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, R99 DCH on uplink.

Data Source

RNC

Source Field

pmSumHsDchLatency

Source Section

RncFunction

pmSumHsDlDelay_0

Aggregate of RAN SDU delay for HS-DSCH on downlink.

Data Source

RNC

Source Field

pmSumHsDlDelay

Source Section

RncFunction

pmSumHsDlDelay_1

Aggregate of RAN SDU delay for HS-DSCH on downlink.

Data Source

RNC

Source Field

pmSumHsDlDelay

Source Section

RncFunction

pmSumHsDlDelay_2

Aggregate of RAN SDU delay for HS-DSCH on downlink.

Data Source

RNC

Source Field

pmSumHsDlDelay

Source Section

RncFunction

pmSumHsEulDlRcvDelay_0

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulDlRcvDelay

Source Section

RncFunction

pmSumHsEulDlRcvDelay_1

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulDlRcvDelay

Source Section

RncFunction

pmSumHsEulDIRcvDelay_2

Aggregate of RAN SDU receive delay for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulDIRcvDelay

Source Section

RncFunction

pmSumHsEulJitter

Aggregate of the RAN SDU Jitter for PS Interactive HS-DSCH on DL, EUL on UL.

Data Source

RNC

Source Field

pmSumHsEulJitter

Source Section

RncFunction

pmSumHsEulLatency_0

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulLatency

Source Section

RncFunction

pmSumHsEulLatency_1

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulLatency

Source Section

RncFunction

pmSumHsEulLatency_2

Aggregate of RAN SDU Latency for PS Interactive HS-DSCH on downlink, EUL on uplink.

Data Source

RNC

Source Field

pmSumHsEulLatency

Source Section

RncFunction

pmTotalPacketDuration1

Accumulated time (in ms) that data has been transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs

Data Source

RNC

Source Field

pmTotalPacketDuration1

Source Section

RncFunction

pmTotalPacketDuration2

Accumulated time (in ms) that data has been transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs

Data Source

RNC

Source Field

pmTotalPacketDuration2

Source Section

RncFunction

pmTotalPacketDuration3

Accumulated time (in ms) that data has been transmitted in bursts of size between 10 kbyte and 100 kbytes for all Interactive RABs

Data Source

RNC

Source Field

pmTotalPacketDuration3

Source Section

RncFunction

pmTotalPacketDuration4

Accumulated time (in ms) that data has been transmitted in bursts of size greater than 100 kbytes for all Interactive RABs

Data Source

RNC

Source Field

pmTotalPacketDuration4

Source Section

RncFunction

pmTotalPacketDurationHs1

Accumulated time (in ms) that data has been transmitted in bursts of size between 200 bytes and 1 kbyte for all Interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmTotalPacketDurationHs1

Source Section

RncFunction

pmTotalPacketDurationHs2

Accumulated time (in ms) that data has been transmitted in bursts of size between 1 kbyte and 10 kbytes for all Interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmTotalPacketDurationHs2

Source Section

RncFunction

pmTotalPacketDurationHs3

Accumulated time (in ms) that data has been transmitted in bursts of size between 10 kbytes and 100 kbytes for all Interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmTotalPacketDurationHs3

Source Section

RncFunction

pmTotalPacketDurationHs4

Accumulated time (in ms) that data has been transmitted in bursts of size greater size than 100 kbytes for all Interactive RABs on HSDPA.

Data Source

RNC

Source Field

pmTotalPacketDurationHs4

Source Section

RncFunction

pmTotNoSbHo

Total number of potential Service Based GSM Handover users per RNC.

Source Field

pmTotNoSbHo

Source Section

Handover

pO1

Power offset for the TFCl. { long, Range = 0..24, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

pO2

Power offset for the TPC bits. { long, Range = 0..24, Default=12 }

Data Source

Bulk CM

Source Section

PowerControl

pO3

Power offset for the pilot bits. { long, Range = 0..24, Default=12 }

Data Source

Bulk CM

Source Section

PowerControl

polygonRadiusFactor

Scale factor that is multiplied with the uncertainty estimate This value is only used when the pre-estimate is successful, i.e. used as the UE reference position. { long, Range = 1..1000, Default=10 }

Data Source

Bulk CM

Source Section

AgpsPositioning

psStreaming128

Indicates whether PS streaming 128 is on or off. { OnOffVals, Default= OFF }

Data Source

Bulk CM

Source Section

RabHandling

psStreamingInactivityTimer

Timer for monitoring activity on the PS Streaming RAB. When the timer expires, RNC will request the CN to release the PS Streaming RAB. { long, Range = 5..600, Default=30 }

Data Source

Bulk CM

Source Section

RabHandling

pwrEstFact1

System constant. { long, Default=100 }

Data Source

Bulk CM

Source Section

PowerControl

pwrEstFact2

System constant. { long, Default=80 }

Data Source

Bulk CM

Source Section

PowerControl

pwrEstFact3

System constant. { long, Default=80 }

Data Source

Bulk CM

Source Section

PowerControl

readSfnInd

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

recordingStorageSize

System constant. { long, Default=60000 }

Data Source

Bulk CM

Source Section

RncFunction

releaseConnOffset

The threshold (offset) for a cell to be included in the active set, when the connection is released at inclusion rejection. { long, Range = -30..250, Default=120 }

Data Source

Bulk CM

Source Section

Handover

repeatTimer

System constant. { long, Default=4 }

Data Source

Bulk CM

Source Section

ChannelSwitching

reportHysteresis

Reporting hysteresis for the code power measurements in the node B. { long, Range = 0..20, Default=6 }

Data Source

Bulk CM

Source Section

ChannelSwitching

reportingInterval1a

Interval of event-triggered periodical reporting in case of 'cell addition failure' or 'cell replacement failure'. { long, Range = 0..7, Default=3 }

Data Source

Bulk CM

Source Section

UeMeasControl

reportingInterval1c

Interval of event-triggered periodical reporting in case of 'cell addition failure' or 'cell replacement failure'. { long, Range = 0..7, Default=3 }

Data Source

Bulk CM

Source Section

UeMeasControl

reportingRange1a

Used by UE functions for intra-frequency measurement reporting (in CELL_DCH). Threshold used for addition-window in evaluation criteria for event type 1a. { long, Range = 0..29, Default=6 }

Data Source

Bulk CM

Source Section

UeMeasControl

reportingRange1b

Used by UE functions for intra-frequency measurement reporting (in CELL_DCH). Threshold used for dropwindow in evaluation criteria for event 1b. { long, Range = 0..29, Default=10 }

Data Source

Bulk CM

Source Section

UeMeasControl

reportPeriodicity

System constant. { long, Default=1000 }

Data Source

Bulk CM

Source Section

PowerControl

RNC_nesw

RNC NE Software Version

Data Source

RNC

Source Field

nesw

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

RNC

rncId_CM

Unique RNC ID (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:rncId

Source Section

RncFunction

rpp

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

PowerControl

rtwpFilter

System constant. { long, Default=9 }

Data Source

Bulk CM

Source Section

PowerControl

selHoSup

Indicates whether Selective Handover is supported in the RNC. Selective Handover is part of shared network support. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

Handover

serviceBasedHoSupport

Service-based HO Support

Data Source

Bulk CM

Source Field

es:serviceBasedHoSupport

Source Section

Handover

sib11RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 11

Data Source

Bulk CM

Source Field

es:sib11RepPeriod

Source Section

Sid

sib11StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 11

Data Source

Bulk CM

Source Field

es:sib11StartPos

Source Section

Sid

sib12RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 12

Data Source

Bulk CM

Source Field

es:sib12RepPeriod

Source Section

Sid

sib12StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 12

Data Source

Bulk CM

Source Field

es:sib12StartPos

Source Section

Sid

sib1RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 1

Data Source

Bulk CM

Source Field

es:sib1RepPeriod

Source Section

Sid

sib1StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 1

Data Source

Bulk CM

Source Field

es:sib1StartPos

Source Section

Sid

sib3RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 3

Data Source

Bulk CM

Source Field

es:sib3RepPeriod

Source Section

Sid

sib3StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 3.

Data Source

Bulk CM

Source Field

es:sib3StartPos

Source Section

Sid

sib5RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 5

Data Source

Bulk CM

Source Field

es:sib5RepPeriod

Source Section

Sid

sib5StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 5

Data Source

Bulk CM

Source Field

es:sib5StartPos

Source Section

Sid

sib7ExpirationTimeFactor

SIB7 use expiration time as re-read mechanism. The expiration time is sib7RepPeriod times sib7ExpirationTimeFactor. { long, Range = 1, Default=1 }

Data Source

Bulk CM

Source Section

Sid

sib7RepPeriod

The Repetition period (SIB_REP) for System Information Block (SIB) type 7

Data Source

Bulk CM

Source Field

es:sib7RepPeriod

Source Section

Sid

sib7StartPos

The Start Position (SIB_POS) for System Information Block (SIB) type 7

Data Source

Bulk CM

Source Field

es:sib7StartPos

Source Section

Sid

sirErrorMode

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

PowerControl

sirErrorReportHyst

System constant. { long, Default=60 }

Data Source

Bulk CM

Source Section

PowerControl

sirEstFilter

System constant. { long, Default=0 }

Data Source

Bulk CM

Source Section

PowerControl

sirIncreaseMask

System constant. { long, Default=4 }

Data Source

Bulk CM

Source Section

PowerControl

sirMax

The maximum allowed SIR target. { long, Range = -82..173, Default=173 }

Data Source

Bulk CM

Source Section

PowerControl

sirMin

The minimum allowed SIR target. { long, Range = -82..173, Default=-82 }

Data Source

Bulk CM

Source Section

PowerControl

state128_128Supported

state 128 128 supported

Data Source

Bulk CM

Source Field

es:state128_128Supported

Source Section

RabHandling

t300

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

Rrc

t302

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

Rrc

t305

Timer for the time in UE between periodic cell updates. If timer has expired, the UE sends a new CELL UPDATE. { long, Range = 0..7, Default=3 }

Data Source

Bulk CM

Source Section

Rrc

t307

System constant. { long, Default=30 }

Data Source

Bulk CM

Source Section

Rrc

t308

System constant. { long, Default=40 }

Data Source

Bulk CM

Source Section

Rrc

t309

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

Rrc

t313

System constant. { long, Default=3 }

Data Source

Bulk CM

Source Section

Rrc

t316

System constant. { long, Default=30 }

Data Source

Bulk CM

Source Section

Rrc

t317

System constant. { long, Default=180 }

Data Source

Bulk CM

Source Section

Rrc

tCellChange

System constant. { long, Default=20 }

Data Source

Bulk CM

Source Section

Handover

thpReportInterval

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

ChannelSwitching

timeReleaseIuPs

This timer is a guard timer in case the PS CN does not release the Iu connection after an IRATHO(inter radio access technology handover) to GSM. { long, Range = 0..120, Default=10 }

Data Source

Bulk CM

Source Section

Handover

timeRelocoverall

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

Handover

timeRelocprep

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

Handover

timeRelocsup

System constant. { long, Default=15 }

Data Source

Bulk CM

Source Section

Handover

timeToTrigger1a

Time in milliseconds (ms) between detection of event 1a and sending of the measurement report. { long, Range = 0..15, Default=11 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger1b

Time in milliseconds (ms) between detection of event 1b and sending of the measurement report. { long, Range = 0..15, Default=12 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger1c

Time in milliseconds (ms) between detection of event 1c and sending of the measurement report. { long, Range = 0..15, Default=11 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger1d

Time in milliseconds (ms) between detection of event 1d and sending of the measurement report. { long, Range = 0..15, Default=14 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger2dEcno

Time in milliseconds (ms) between detection of event 2d and sending of the measurement report, when the measurement quantity is CPICH EC/NO. { long, Range = 0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640,, Default=320 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger2dRscp

Time in milliseconds (ms) between detection of event 2d and sending of the measurement report, when the measurement quantity is CPICH RSCP. { long, Range = 0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640,, Default=320 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger2fEcno

Time in milliseconds (ms) between detection of event 2f and sending of the measurement report, when the measurement quantity is CPICH EC/NO. { long, Range = 0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640,, Default=1280 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger2fRscp

Time in milliseconds (ms) between detection of event 2f and sending of the measurement report, when the measurement quantity is CPICH RSCP. { long, Range = 0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640,, Default=1280 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeToTrigger3a

Time in milliseconds (ms) between detection of event 3a and sending of the measurement report. { long, Range = 0..15, Default=6 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeTrigg4_2b

Time between detection of event 2b and sending of the measurement report, for measurement 4.
{ long, Range = 0, 10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640, 1280, 2560,,
Default=100 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeTrigg6a

Time between detection of event 6a and sending of the measurement report. { long, Range = 0,
10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640, 1280, 2560,, Default=320 }

Data Source

Bulk CM

Source Section

UeMeasControl

timeTrigg6b

Time between detection of event 6b and sending of the measurement report. { long, Range = 0,
10, 20, 40, 60, 80, 100, 120, 160, 200, 240, 320, 640, 1280, 2560,, Default=1280 }

Data Source

Bulk CM

Source Section

UeMeasControl

tmStopGsmMeas

Maximum time for Service Based GSM Handover measurements. 60 = Measurements are never stopped.

Data Source

Bulk CM

Source Field

es:tmStopGsmMeas

Source Section

Handover

toAE

Time of arrival early point. { long, Range = 0..1279, Default=195 }

Data Source

Bulk CM

Source Section

CchFrameSynch

toAWE

Time of arrival window endpoint. { long, Range = 0..2559, Default=2 }

Data Source

Bulk CM

Source Section

CchFrameSynch

toAWS

Time of arrival window startpoint. { long, Range = 0..1279, Default=30 }

Data Source

Bulk CM

Source Section

CchFrameSynch

tProcRbsDI

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

CchFrameSynch

tProcRncDI

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

CchFrameSynch

transmittedCodePowerFilter

System constant. { long, Default=4 }

Data Source

Bulk CM

Source Section

PowerControl

triggerCondOne1b

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

triggerCondTwo1a

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

UeMeasControl

tsHoInIratHo

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

Handover

uetrFileSize

Size of each UETR recording file. { long, Range = 0..60000, Default=275 }

Data Source

Bulk CM

Source Section

RncFunction

ueTxPowerThresh6a

Threshold for event 6a. { long, Range = -50..33, Default=21 }

Data Source

Bulk CM

Source Section

UeMeasControl

ueTxPowerThresh6b

Threshold for event 6b. { long, Range = -50..33, Default=18 }

Data Source

Bulk CM

Source Section

UeMeasControl

ulInitSirTargetExtraHigh

Generic initial UL SIR target value for RABs which have a minimum Spreading Factor (SF) <= 4. { long, Range = -82..173, Default=92 }

Data Source

Bulk CM

Source Section

PowerControl

ulInitSirTargetHigh

Required UL Initial SIR target for the RAB having minimum SF equal to or lower than 16. { long, Range = -82..173, Default=82 }

Data Source

Bulk CM

Source Section

PowerControl

ulInitSirTargetLow

Required UL Initial SIR target for the RAB having minimum SF equal to or higher than 32. { long, Range = -82..173, Default=49 }

Data Source

Bulk CM

Source Section

PowerControl

ulInitSirTargetSrb

Required UL Initial SIR target for stand alone SRB. { long, Range = -82..173, Default=57 }

Data Source

Bulk CM

Source Section

PowerControl

ulOuterLoopRegulator

Regulation type for uplink outer loop power control algorithm. { string, Default= JUMP }

Data Source

Bulk CM

Source Section

PowerControl

ulRlcBufUpswitch

Uplink threshold for channel switching from FACH/RACH to dedicated channel. { long, Range = 8,16,32,64,128,256,512,1024,2048,3072,4096,6144,8192, Default=256 }

Data Source

Bulk CM

Source Section

ChannelSwitching

ulRlcBufUpswitchMrab

Uplink threshold of the RLC buffer load, used to issue an upswitch request (from "Speech + PS 0/0" to "Speech + PS 64/64"). { long, Range = 8, 16, 32, 64, 128, 256, 512, 1024, 1536, 2048, 3072, 4096,, Default=8 }

Data Source

Bulk CM

Source Section

ChannelSwitching

ulSirGuard

System constant. { long, Default=2 }

Data Source

Bulk CM

Source Section

PowerControl

ulSirStep

The step size for a SIR target change. { long, Range = 0..50, Default=10 }

Data Source

Bulk CM

Source Section

PowerControl

uncertaintyAltitude

Uncertainty in altitude for the UE reference position, independent of whether the pre-estimate is successful or the RNC instead uses a fall-back position. { long, Range = 0..127, Default=Mandatory }

Data Source

Bulk CM

Source Section

AgpsPositioning

updateCellReattsNo

Number of update reattempts when an update of system information parameters in a cell failed. { long, Range = 0..10, Default=0 }

Data Source

Bulk CM

Source Section

Sid

upswitchPwrMargin

Uplink (DCH to DCH) power margin. { long, Range = 0..20, Default=6 }

Data Source

Bulk CM

Source Section

ChannelSwitching

upswitchTimer

Time during which the bandwidth utilisation is allowed to be high before an upswitch request is issued. { long, Range = 0..100, Default=5 }

Data Source

Bulk CM

Source Section

ChannelSwitching

upswitchTimerUl

Time during which the UL throughput should be higher than threshold, defined by bandwidthMarginUl, before an upswitch is issued. 0 indicates that the upswitch is never requested, even if bandwidth utilization is above the threshold.

Data Source

Bulk CM

Source Field

es:upswitchTimerUl

Source Section

ChannelSwitching

usedFreqRelThresh2fEcno

Relative threshold for event 2f vs event 2d for the used frequency when the measurement quantity is Ec/No. { long, Range = 0..20, Default=1 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqRelThresh2fRscp

Relative threshold for event 2f vs event 2d for the used frequency when the measurement quantity is RSCP. { long, Range = 0..20, Default=3 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqRelThresh4_2bEcno

Relative threshold for event 2b vs event 2d, when the 2d measurement with measurement quantity CPICH EC/NO was started. { long, Range = -10..10, Default=-1 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqRelThresh4_2bRscp

Relative threshold for event 2b vs event 2d when the 2d measurement with measurement quantity CPICH RSCP was started. { long, Range = -20..20, Default=-3 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqThresh2dEcnoDrnc

Threshold for event 2d for the used frequency for cells located in DRNC when the measurement quantity is Ec/No. { long, Range = -24..0, Default=-12 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqThresh2dRscpDrnc

Threshold for event 2d for the used frequency for cells located in the DRNC when the measurement quantity is RSCP. { long, Range = -115..-25, Default=-97 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqW2d

Weighting factor for event 2d for the used frequency. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqW2f

Weighting factor for event 2f for the used frequency. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

usedFreqW4_2b

Weighting factor for measurement 4 event 2b for the currently used frequency. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

userLabel

A user-friendly (and user assigned) name of the associated object.

Data Source

Bulk CM

Source Field

un:userLabel

Source Section

RncFunction

userLabel_CM

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

UeMeasControl

utranFilterCoefficient3

Coefficient for layer 3 filtering of UTRAN quality before inter-RAT reporting evaluation. { long, Range = 0..9,11,13,15,17,19, Default=2 }

Data Source

Bulk CM

Source Section

UeMeasControl

utranRelThresh3aEcno

Relative threshold for event 3a vs event 2d, when the 2d measurement with measurement quantity CPICH EC/NO was started. { long, Range = -10..10, Default=-1 }

Data Source

Bulk CM

Source Section

UeMeasControl

utranRelThresh3aRscp

Relative threshold for event 3a vs event 2d when the 2d measurement with measurement quantity CPICH RSCP was started. { long, Range = -20..20, Default=-3 }

Data Source

Bulk CM

Source Section

UeMeasControl

utranRelThreshRscp

Relative threshold used during bad connection quality, when the measurement quantity is CPICH RSCP. { long, Range = 0..40, Default=5 }

Data Source

Bulk CM

Source Section

UeMeasControl

utranRnsConfidence

Confidence of the fall-back position, used when the pre-estimate fails. { long, Range = 0.. 100, Default=100 }

Data Source

Bulk CM

Source Section

AgpsPositioning

utranRnsUncertaintyRadius

Uncertainty semi-major and semi-minor axes for the fall-back position, used when the pre-estimate fails. Both axes are assigned the same value. { long, Range = 0.. 127, Default=Mandatory }

Data Source

Bulk CM

Source Section

AgpsPositioning

utranW3a

Weighting factor for event 3a for UTRAN. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

w1a

Weight factor to include active set cells other than the best in evaluation criteria for event 1a. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

w1b

Weight factor to include active set cells other than the best in evaluation criteria for event 1b. { long, Range = 0..20, Default=0 }

Data Source

Bulk CM

Source Section

UeMeasControl

RNCModule Primitive Calculations

The following is a list of primitive calculations for the RNCModule entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

RNCModule Peg Counts

The following is a list of peg counts for the RNCModule entity.

availabilityStatus

The availability status of the RncModule. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

RncModule

operationalState

The operational state of RncModule. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

RncModule

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

RncModule_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

RncModule_WMGeneral

reservedBy

Sequence of SpbDeviceGroup MO and IubLink MO references which belongs to this RncModule. { sequence<ManagedObject,72>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

RncModule

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

RncModule

rncModuleResourceId

Created by the system. Used locally within the RNC to address the RncModule. { long, Range = 0..42, Default=0, ReadOnly, NoNotification }

Data Source

Bulk CM

Source Section

RncModule

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

RncModule

SccpAcctCriteria_NodeB Primitive Calculations

The following is a list of primitive calculations for the SccpAcctCriteria_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpAcctCriteria_NodeB Peg Counts

The following is a list of peg counts for the SccpAcctCriteria_NodeB entity.

pmNoOfMsg

The total number of messages, both incoming and outgoing.

Data Source

NodeB_RXI

Source Field

pmNoOfMsg

Source Section

SccpAccountingCriteria

pmNoOfOctets

The total number of octets, both incoming and outgoing.

Data Source

NodeB_RXI

Source Field

pmNoOfOctets

Source Section

SccpAccountingCriteria

SccpAcctCriteria_RNC Primitive Calculations

The following is a list of primitive calculations for the SccpAcctCriteria_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpAcctCriteria_RNC Peg Counts

The following is a list of peg counts for the SccpAcctCriteria_RNC entity.

pmNoOfMsg

The total number of messages, both incoming and outgoing.

Data Source

RNC_RXI

Source Field

pmNoOfMsg

Source Section

SccpAccountingCriteria

pmNoOfOctets

The total number of octets, both incoming and outgoing.

Data Source

RNC_RXI

Source Field

pmNoOfOctets

Source Section

SccpAccountingCriteria

SccpAp_NodeB Primitive Calculations

The following is a list of primitive calculations for the SccpAp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpAp_NodeB Peg Counts

The following is a list of peg counts for the SccpAp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpAp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpAp_NodeB_WMGeneral

SccpAp_RNC Primitive Calculations

The following is a list of primitive calculations for the SccpAp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpAp_RNC Peg Counts

The following is a list of peg counts for the SccpAp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpAp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpAp_RNC_WMGeneral

Sccpch Primitive Calculations

The following is a list of primitive calculations for the Sccpch entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sccpch Peg Counts

The following is a list of peg counts for the Sccpch entity.

NodeB_RELEASE

Release

Data Source

0

PERLENSEC

Period Length

Data Source

0

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

pmNoOfTfc1OnFach1

The number of transmitted Transport Format Combination1 (TFC1) frames on Forward Access Channel1 (FACH1), per GP

Source Field

pmNoOfTfc1OnFach1

Source Section

Sccpch

pmNoOfTfc2OnFach1

The number of transmitted Transport Format Combination2 (TFC2) frames on Forward Access Channel1 (FACH1), per GP

Source Field

pmNoOfTfc2OnFach1

Source Section

Sccpch

pmNoOfTfc3OnFach2

The number of transmitted Transport Format Combination2 (TFC2) frames on Forward Access Channel3 (FACH3), per GP

Data Source

NodeB

Source Field

pmNoOfTfc3OnFach2

Source Section

DownlinkBaseBandPool

SccpPolicing_NodeB Primitive Calculations

The following is a list of primitive calculations for the SccpPolicing_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpPolicing_NodeB Peg Counts

The following is a list of peg counts for the SccpPolicing_NodeB entity.

pmNoOfRejectMsg

The total number of rejected messages.

Data Source

NodeB_RXI

Source Field

pmNoOfRejectMsg

Source Section

SccpPolicing

SccpPolicing_RNC Primitive Calculations

The following is a list of primitive calculations for the SccpPolicing_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpPolicing_RNC Peg Counts

The following is a list of peg counts for the SccpPolicing_RNC entity.

pmNoOfRejectMsg

The total number of rejected messages.

Data Source

RNC_RXI

Source Field

pmNoOfRejectMsg

Source Section

SccpPolicing

SccpScrc_NodeB Primitive Calculations

The following is a list of primitive calculations for the SccpScrc_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpScrc_NodeB Peg Counts

The following is a list of peg counts for the SccpScrc_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpScrc_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpScrc_NodeB_WMGeneral

pmNoOfConnectFailure

Performance monitoring counter for number of routing failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConnectFailure

Source Section

SccpScrc_NodeB

pmNoOfHopCounterViolation

Performance monitoring counter for number of hop counter violations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfHopCounterViolation

Source Section

SccpScrc_NodeB

pmNoOfRoutingFailNetworkCongest

Performance monitoring counter for Nr of routing failures due to network cong.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNetworkCongest

Source Section

SccpScrc_NodeB

pmNoOfRoutingFailNoTransAddrOfSuchNature

Perf monitoring counter for Nr of routing failures

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNoTransAddrOfSuchNature

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailNoTransSpecificAddr

Perf monit counter Nr routing fail due to being no translation specific address

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNoTransSpecificAddr

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailReasonUnknown

Perf monitoring counter for Nr of routing failures due to unknown reason.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailReasonUnknown

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailSubsysUnavail

Perf monitoring counter Nr routing failures due destination subsystem unavail.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailSubsysUnavail

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailUnequippedSubsys

Perf monitoring counter for Nr of routing failures due to unequipped subsystem.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailUnequippedSubsys

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailure

Performance monitoring counter for number of routing failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailure

Source Section

SccpSrcr_NodeB

pmNoOfRoutingFailurePointCodeUnAvail

Perf monitoring counter for Nr of routing failures

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailurePointCodeUnAvail

Source Section

SccpScrc_NodeB

SccpScrc_RNC Primitive Calculations

The following is a list of primitive calculations for the SccpScrc_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpScrc_RNC Peg Counts

The following is a list of peg counts for the SccpScrc_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSrc_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSrc_RNC_WMGeneral

pmNoOfConnectFailure

Performance monitoring counter for number of connect failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConnectFailure

Source Section

SccpSrc_RNC

pmNoOfHopCounterViolation

Performance monitoring counter for number of hop counter violations.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfHopCounterViolation

Source Section

SccpSrc_RNC

pmNoOfRoutingFailNetworkCongest

Performance monitoring counter for Nr of routing failures due to network cong.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNetworkCongest

Source Section

SccpSrc_RNC

pmNoOfRoutingFailNoTransAddrOfSuchNature

Perf monitoring counter for Nr of routing failures

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNoTransAddrOfSuchNature

Source Section

SccpSrc_RNC

pmNoOfRoutingFailNoTransSpecificAddr

Perf monit counter Nr routing fail due to being no translation specific address

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailNoTransSpecificAddr

Source Section

SccpSrc_RNC

pmNoOfRoutingFailReasonUnknown

Perf monitoring counter for Nr of routing failures due to unknown reason.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailReasonUnknown

Source Section

SccpSrcr_RNC

pmNoOfRoutingFailSubsysUnavail

Perf monitoring counter Nr routing failures due destination subsystem unavail.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailSubsysUnavail

Source Section

SccpSrcr_RNC

pmNoOfRoutingFailUnequippedSubsys

Perf monitoring counter for Nr of routing failures due to unequipped subsystem.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailUnequippedSubsys

Source Section

SccpSrcr_RNC

pmNoOfRoutingFailure

Performance monitoring counter for number of routing failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailure

Source Section

SccpSrc_RNC

pmNoOfRoutingFailurePointCodeUnAvail

Perf monitoring counter for Nr of routing failures

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRoutingFailurePointCodeUnAvail

Source Section

SccpSrc_RNC

SccpSp_NodeB Primitive Calculations

The following is a list of primitive calculations for the SccpSp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpSp_NodeB Peg Counts

The following is a list of peg counts for the SccpSp_NodeB entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSp_NodeB_WMGeneral

pmNoOfConInUseExceedHighWaterMark

Number of connections in use that were exceeded the high watermark threshold.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConInUseExceedHighWaterMark

Source Section

SccpSp_NodeB

pmNoOfConInUseRecededLowWaterMark

Number of connections in use that were receded the low watermark threshold.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConInUseRecededLowWaterMark

Source Section

SccpSp_NodeB

pmNoOfCREFRecFromNL

Number of CREF messages received from NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCREFRecFromNL

Source Section

SccpSp_NodeB

pmNoOfCREFSentToNL

Number of CREF messages sent to NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCREFSentToNL

Source Section

SccpSp_NodeB

pmNoOfCRRec

Number of received CRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCRRec

Source Section

SccpSp_NodeB

pmNoOfCRSent

Number of sent CRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCRSent

Source Section

SccpSp_NodeB

pmNoOfDT1Rec

Number of received DT1s.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfDT1Rec

Source Section

SccpSp_NodeB

pmNoOfDT1Sent

Number of sent DT1s.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfDT1Sent

Source Section

SccpSp_NodeB

pmNoOfERRRec

Number of received ERRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfERRRec

Source Section

SccpSp_NodeB

pmNoOfERRSent

Number of sent ERRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfERRSent

Source Section

SccpSp_NodeB

pmNoOfRLSDRecFromNL

Number of RLSD messages received from NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRLSDRecFromNL

Source Section

SccpSp_NodeB

pmNoOfRLSDSentToNL

Number of RLSD messages sent to NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRLSDSentToNL

Source Section

SccpSp_NodeB

pmNoOfSubsysAllowedSent

Number of sent SSAs, subsystem allowed.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSubsysAllowedSent

Source Section

SccpSp_NodeB

pmNoOfUDTRec

Number of received UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTRec

Source Section

SccpSp_NodeB

pmNoOfUDTSent

Number of sent UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSent

Source Section

SccpSp_NodeB

pmNoOfUDTSRec

Number of received UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSRec

Source Section

SccpSp_NodeB

pmNoOfUDTSSent

Number of sent UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSSent

Source Section

SccpSp_NodeB

pmNoOfXUDTRec

Performance Management counter for number of received XUDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTRec

Source Section

SccpSp_NodeB

pmNoOfXUDTSent

Number of sent XUDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSent

Source Section

SccpSp_NodeB

pmNoOfXUDTSRec

Number of received XUDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSRec

Source Section

SccpSp_NodeB

pmNoOfXUDTSSent

Number of sent XUDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSSent

Source Section

SccpSp_NodeB

SccpSp_RNC Primitive Calculations

The following is a list of primitive calculations for the SccpSp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SccpSp_RNC Peg Counts

The following is a list of peg counts for the SccpSp_RNC entity.

PERLENSEC

Period length in seconds

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

SccpSp_RNC_WMGeneral

pmNoOfConInUseExceedHighWaterMark

Number of connections in use that were exceeded the high watermark threshold.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConInUseExceedHighWaterMark

Source Section

SccpSp_RNC

pmNoOfConInUseRecededLowWaterMark

Number of connections in use that were receded the low watermark threshold.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfConInUseReceededLowWaterMark

Source Section

SccpSp_RNC

pmNoOfCREFRecFromNL

Number of CREF messages received from NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCREFRecFromNL

Source Section

SccpSp_RNC

pmNoOfCREFSentToNL

Number of CREF messages sent to NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCREFSentToNL

Source Section

SccpSp_RNC

pmNoOfCRRec

Number of received CRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCRRec

Source Section

SccpSp_RNC

pmNoOfCRSent

Number of sent CRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfCRSent

Source Section

SccpSp_RNC

pmNoOfDT1Rec

Number of received DT1s.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfDT1Rec

Source Section

SccpSp_RNC

pmNoOfDT1Sent

Number of sent DT1s.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfDT1Sent

Source Section

SccpSp_RNC

pmNoOfERRRec

Number of received ERRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfERRRec

Source Section

SccpSp_RNC

pmNoOfERRSent

Number of sent ERRs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfERRSent

Source Section

SccpSp_RNC

pmNoOfRLSDRecFromNL

Number of RLSD messages received from NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRLSDRecFromNL

Source Section

SccpSp_RNC

pmNoOfRLSDSentToNL

Number of RLSD messages sent to NL.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRLSDSentToNL

Source Section

SccpSp_RNC

pmNoOfSubsysAllowedSent

Number of sent SSAs, subsystem allowed.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSubsysAllowedSent

Source Section

SccpSp_RNC

pmNoOfUDTRec

Number of received UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTRec

Source Section

SccpSp_RNC

pmNoOfUDTSent

Number of sent UDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSent

Source Section

SccpSp_RNC

pmNoOfUDTSRec

Number of received UDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSRec

Source Section

SccpSp_RNC

pmNoOfUDTSSent

Number of sent UDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUDTSSent

Source Section

SccpSp_RNC

pmNoOfXUDTRec

Performance Management counter for number of received XUDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTRec

Source Section

SccpSp_RNC

pmNoOfXUDTSent

Number of sent XUDTs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSent

Source Section

SccpSp_RNC

pmNoOfXUDTSRec

Number of received XUDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSRec

Source Section

SccpSp_RNC

pmNoOfXUDTSSent

Number of sent XUDTSs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfXUDTSSent

Source Section

SccpSp_RNC

Sctp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Sctp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sent_SCTP_data_chunks

The total number of sent SCTP data chunks

Calculation

vsum (pmSctpStatSentChunks , pmSctpStatRetransChunks)

Sctp_NodeB Peg Counts

The following is a list of peg counts for the Sctp_NodeB entity.

pmSctpAborted

The total number of times that SCTP associations have made a direct transition to the CLOSED state from any state using the primitive ABORT.

Data Source

NodeB_RXI

Source Field

pmSctpAborted

Source Section

Sctp

pmSctpActiveEstab

The total number of times that SCTP associations have made a direct transition to the ESTABLISHED state from the COOKIE-ECHOED state.

Data Source

NodeB_RXI

Source Field

pmSctpActiveEstab

Source Section

Sctp

pmSctpCurrEstab

The current number of SCTP associations for which the current state is either ESTABLISHED, SHUTDOWN-PENDING, or SHUTDOWN-RECEIVED.

Data Source

NodeB_RXI

Source Field

pmSctpCurrEstab

Source Section

Sctp

pmSctpPassiveEstab

The total number of times that SCTP associations have made a direct transition to the ESTABLISHED state from the CLOSED state.

Data Source

NodeB_RXI

Source Field

pmSctpPassiveEstab

Source Section

Sctp

pmSctpShutdowns

The total number of times that SCTP associations have made a direct transition to the CLOSED state from either the SHUTDOWN-SENT state or the SHUTDOWN-ACK-SENT state.

Data Source

NodeB_RXI

Source Field

pmSctpShutdowns

Source Section

Sctp

pmSctpStatAssocOutOfBlue

The total number of out of the blue packets (SCTP packet correctly formed-right checksum- but the receiver is not able to identify the association to which this packet belongs) received by the host.

Data Source

NodeB_RXI

Source Field

pmSctpStatAssocOutOfBlue

Source Section

Sctp

pmSctpStatChecksumErrorCounter

The total number of SCTP packets received from the peers with an invalid checksum.

Data Source

NodeB_RXI

Source Field

pmSctpStatChecksumErrorCounter

Source Section

Sctp

pmSctpStatCommResume

The total number of times SCTP has sent a communication resume indication to the user.

Data Source

NodeB_RXI

Source Field

pmSctpStatCommResume

Source Section

Sctp

pmSctpStatCommStop

The total number of times SCTP has sent a communication stop indication to the user.

Data Source

NodeB_RXI

Source Field

pmSctpStatCommStop

Source Section

Sctp

pmSctpStatFragmentedUserMsg

The total number of fragmented user messages.

Data Source

NodeB_RXI

Source Field

pmSctpStatFragmentedUserMsg

Source Section

Sctp

pmSctpStatOutOfOrderRecChunks

The total number of unordered chunks received from the peers.

Data Source

NodeB_RXI

Source Field

pmSctpStatOutOfOrderRecChunks

Source Section

Sctp

pmSctpStatOutOfOrderSendChunks

The total number of unordered chunks sent to the peers.

Data Source

NodeB_RXI

Source Field

pmSctpStatOutOfOrderSendChunks

Source Section

Sctp

pmSctpStatReassembledUserMsg

The total number of reassembled user messages.

Data Source

NodeB_RXI

Source Field

pmSctpStatReassembledUserMsg

Source Section

Sctp

pmSctpStatRecChunks

The total number of complete data chunks received from the peers (no retransmissions included).

Data Source

NodeB_RXI

Source Field

pmSctpStatRecChunks

Source Section

Sctp

pmSctpStatRecChunksDropped

The total number of sent chunks that SCTP has been forced to drop due to buffer overflow in the receiving buffer.

Data Source

NodeB_RXI

Source Field

pmSctpStatRecChunksDropped

Source Section

Sctp

pmSctpStatReceivedControlChunks

The total number of datagrams received with chunk type id > 0.

Data Source

NodeB_RXI

Source Field

pmSctpStatReceivedControlChunks

Source Section

Sctp

pmSctpStatReceivedPackages

The total number of SCTP packages received.

Data Source

NodeB_RXI

Source Field

pmSctpStatReceivedPackages

Source Section

Sctp

pmSctpStatRetransChunks

The total number of data chunks retransmitted to the peers.

Data Source

NodeB_RXI

Source Field

pmSctpStatRetransChunks

Source Section

Sctp

pmSctpStatSentChunks

The total number of complete data chunks sent to the peers (no retransmissions included).

Data Source

NodeB_RXI

Source Field

pmSctpStatSentChunks

Source Section

Sctp

pmSctpStatSentChunksDropped

The total number of sent chunks that SCTP has been forced to drop due to buffer overflow in the sending buffer.

Data Source

NodeB_RXI

Source Field

pmSctpStatSentChunksDropped

Source Section

Sctp

pmSctpStatSentControlChunks

The total number of datagrams sent with chunk type id > 0.

Data Source

NodeB_RXI

Source Field

pmSctpStatSentControlChunks

Source Section

Sctp

pmSctpStatSentPackages

The total number of SCTP packages sent.

Data Source

NodeB_RXI

Source Field

pmSctpStatSentPackages

Source Section

Sctp

Sctp_RNC Primitive Calculations

The following is a list of primitive calculations for the Sctp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sent_SCTP_data_chunks

The total number of sent SCTP data chunks

Calculation

vsum (pmSctpStatSentChunks , pmSctpStatRetransChunks)

Sctp_RNC Peg Counts

The following is a list of peg counts for the Sctp_RNC entity.

pmSctpAborted

The total number of times that SCTP associations have made a direct transition to the CLOSED state from any state using the primitive ABORT.

Data Source

RNC_RXI

Source Field

pmSctpAborted

Source Section

Sctp

pmSctpActiveEstab

The total number of times that SCTP associations have made a direct transition to the ESTABLISHED state from the COOKIE-ECHOED state.

Data Source

RNC_RXI

Source Field

pmSctpActiveEstab

Source Section

Sctp

pmSctpCurrEstab

The current number of SCTP associations for which the current state is either ESTABLISHED, SHUTDOWN-PENDING, or SHUTDOWN-RECEIVED.

Data Source

RNC_RXI

Source Field

pmSctpCurrEstab

Source Section

Sctp

pmSctpPassiveEstab

The total number of times that SCTP associations have made a direct transition to the ESTABLISHED state from the CLOSED state.

Data Source

RNC_RXI

Source Field

pmSctpPassiveEstab

Source Section

Sctp

pmSctpShutdowns

The total number of times that SCTP associations have made a direct transition to the CLOSED state from either the SHUTDOWN-SENT state or the SHUTDOWN-ACK-SENT state.

Data Source

RNC_RXI

Source Field

pmSctpShutdowns

Source Section

Sctp

pmSctpStatAssocOutOfBlue

The total number of out of the blue packets (SCTP packet correctly formed-right checksum- but the receiver is not able to identify the association to which this packet belongs) received by the host.

Data Source

RNC_RXI

Source Field

pmSctpStatAssocOutOfBlue

Source Section

Sctp

pmSctpStatChecksumErrorCounter

The total number of SCTP packets received from the peers with an invalid checksum.

Data Source

RNC_RXI

Source Field

pmSctpStatChecksumErrorCounter

Source Section

Sctp

pmSctpStatCommResume

The total number of times SCTP has sent a communication resume indication to the user.

Data Source

RNC_RXI

Source Field

pmSctpStatCommResume

Source Section

Sctp

pmSctpStatCommStop

The total number of times SCTP has sent a communication stop indication to the user.

Data Source

RNC_RXI

Source Field

pmSctpStatCommStop

Source Section

Sctp

pmSctpStatFragmentedUserMsg

The total number of fragmented user messages.

Data Source

RNC_RXI

Source Field

pmSctpStatFragmentedUserMsg

Source Section

Sctp

pmSctpStatOutOfOrderRecChunks

The total number of unordered chunks received from the peers.

Data Source

RNC_RXI

Source Field

pmSctpStatOutOfOrderRecChunks

Source Section

Sctp

pmSctpStatOutOfOrderSendChunks

The total number of unordered chunks sent to the peers.

Data Source

RNC_RXI

Source Field

pmSctpStatOutOfOrderSendChunks

Source Section

Sctp

pmSctpStatReassembledUserMsg

The total number of reassembled user messages.

Data Source

RNC_RXI

Source Field

pmSctpStatReassembledUserMsg

Source Section

Sctp

pmSctpStatRecChunks

The total number of complete data chunks received from the peers (no retransmissions included).

Data Source

RNC_RXI

Source Field

pmSctpStatRecChunks

Source Section

Sctp

pmSctpStatRecChunksDropped

The total number of sent chunks that SCTP has been forced to drop due to buffer overflow in the receiving buffer.

Data Source

RNC_RXI

Source Field

pmSctpStatRecChunksDropped

Source Section

Sctp

pmSctpStatReceivedControlChunks

The total number of datagrams received with chunk type id > 0.

Data Source

RNC_RXI

Source Field

pmSctpStatReceivedControlChunks

Source Section

Sctp

pmSctpStatReceivedPackages

The total number of SCTP packages received.

Data Source

RNC_RXI

Source Field

pmSctpStatReceivedPackages

Source Section

Sctp

pmSctpStatRetransChunks

The total number of data chunks retransmitted to the peers.

Data Source

RNC_RXI

Source Field

pmSctpStatRetransChunks

Source Section

Sctp

pmSctpStatSentChunks

The total number of complete data chunks sent to the peers (no retransmissions included).

Data Source

RNC_RXI

Source Field

pmSctpStatSentChunks

Source Section

Sctp

pmSctpStatSentChunksDropped

The total number of sent chunks that SCTP has been forced to drop due to buffer overflow in the sending buffer.

Data Source

RNC_RXI

Source Field

pmSctpStatSentChunksDropped

Source Section

Sctp

pmSctpStatSentControlChunks

The total number of datagrams sent with chunk type id > 0.

Data Source

RNC_RXI

Source Field

pmSctpStatSentControlChunks

Source Section

Sctp

pmSctpStatSentPackages

The total number of SCTP packages sent.

Data Source

RNC_RXI

Source Field

pmSctpStatSentPackages

Source Section

Sctp

Sector Primitive Calculations

The following is a list of primitive calculations for the Sector entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Service Primitive Calculations

The following is a list of primitive calculations for the Service entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Slot_NodeB Primitive Calculations

The following is a list of primitive calculations for the Slot_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Slot_RNC Primitive Calculations

The following is a list of primitive calculations for the Slot_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

MainProcessorLoadRNC_Slot

Main CPU load % (based on Operating System Enea function).

Calculation

AGGR(PlugInUnit_RNC, pmProcessorLoad)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SpbDeviceGroup_NodeB Primitive Calculations

The following is a list of primitive calculations for the SpbDeviceGroup_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SpbDeviceGroup_NodeB Peg Counts

The following is a list of peg counts for the SpbDeviceGroup_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Section

SpbDeviceGroup_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceGroup_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceGroup_NodeB_WMGeneral

SpbDeviceGroup_RNC Primitive Calculations

The following is a list of primitive calculations for the SpbDeviceGroup_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SpbDeviceGroup_RNC Peg Counts

The following is a list of peg counts for the SpbDeviceGroup_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceGroup_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceGroup_RNC_WMGeneral

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

SpbDeviceGroup_RNC

SpbDeviceSet_NodeB Primitive Calculations

The following is a list of primitive calculations for the SpbDeviceSet_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SpbDeviceSet_NodeB Peg Counts

The following is a list of peg counts for the SpbDeviceSet_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Section

SpbDeviceSet_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceSet_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceSet_NodeB_WMGeneral

SpbDeviceSet_RNC Primitive Calculations

The following is a list of primitive calculations for the SpbDeviceSet_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

SpbDeviceSet_RNC Peg Counts

The following is a list of peg counts for the SpbDeviceSet_RNC entity.

PERLENSEC

Period Length

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceSet_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

SpbDeviceSet_RNC_WMGeneral

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Section

SpbDeviceSet_RNC

SpDevicePool Primitive Calculations

The following is a list of primitive calculations for the SpDevicePool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Sts1SpeTtp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Sts1SpeTtp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sts1SpeTtp_NodeB Peg Counts

The following is a list of peg counts for the Sts1SpeTtp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

Sts1SpeTtp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Sts1SpeTtp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

Sts1SpeTtp_NodeB_WMGeneral

pmEsp

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmEsp

Source Section

Sts1SpeTtp

pmSesp

The total number of Severely Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmSesp

Source Section

Sts1SpeTtp

pmUasp

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

NodeB_RXI

Source Field

pmUasp

Source Section

Sts1SpeTtp

Sts1SpeTtp_RNC Primitive Calculations

The following is a list of primitive calculations for the Sts1SpeTtp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sts1SpeTtp_RNC Peg Counts

The following is a list of peg counts for the Sts1SpeTtp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Sts1SpeTtp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Sts1SpeTtp_RNC_WMGeneral

pmEsp

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEsp

Source Section

Sts1SpeTtp

pmSesp

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSesp

Source Section

Sts1SpeTtp

pmUasp

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

RNC_RXI

Source Field

pmUasp

Source Section

Sts1SpeTtp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

Sts1SpeTtp_RNC

Sts3CspeTtp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Sts3CspeTtp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sts3CspeTtp_NodeB Peg Counts

The following is a list of peg counts for the Sts3CspeTtp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

Sts3CspeTtp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Sts3CspeTtp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Sts3CspeTtp_NodeB_WMGeneral

pmEsp

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmEsp

Source Section

Sts3CspeTtp

pmSesp

The total number of Severely Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmSesp

Source Section

Sts3CspeTtp

pmUasp

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

NodeB_RXI

Source Field

pmUasp

Source Section

Sts3CspeTtp

Sts3CspeTtp_RNC Primitive Calculations

The following is a list of primitive calculations for the Sts3CspeTtp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Sts3CspeTtp_RNC Peg Counts

The following is a list of peg counts for the Sts3CspeTtp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Sts3CspeTtp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Sts3CspeTtp_RNC_WMGeneral

pmEsp

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEsp

Source Section

Sts3CspeTtp

pmSesp

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSesp

Source Section

Sts3CspeTtp

pmUasp

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

RNC_RXI

Source Field

pmUasp

Source Section

Sts3CspeTtp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

Sts3CspeTtp_RNC

Subrack_NodeB Primitive Calculations

The following is a list of primitive calculations for the Subrack_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Subrack_RNC Primitive Calculations

The following is a list of primitive calculations for the Subrack_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

MainProcessorLoadRNC_Subrack

Main CPU load % (based on Operating System Enea function) filtered on Slot=8.

Calculation

```
AGGR(Slot_RNC[stringToInt(LocalKey) == 8], MainProcessorLoadRNC_Slot)
```

NUMDAYS

of days in Report

Calculation

```
DAYSINREPORT()
```

NUMHOURS

of hours in Summation Data

Calculation

System Primitive Calculations

The following is a list of primitive calculations for the System entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

T1Ttp_NodeB Primitive Calculations

The following is a list of primitive calculations for the T1Ttp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

T1Ttp_NodeB Peg Counts

The following is a list of peg counts for the T1Ttp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

T1Ttp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

T1Ttp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

T1Ttp_NodeB_WMGeneral

pmEs

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmEs

Source Section

T1Ttp

pmSes

The total number of Severely Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmSes

Source Section

T1Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

NodeB_RXI

Source Field

pmUas

Source Section

T1Ttp

T1Ttp_RNC Primitive Calculations

The following is a list of primitive calculations for the T1Ttp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

TlTtp_RNC Peg Counts

The following is a list of peg counts for the TlTtp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

TlTtp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

TlTtp_RNC_WMGeneral

pmEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEs

Source Section

T1Ttp

pmSes

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSes

Source Section

T1Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive SES are detected (them being part of the unavailable time) and ends when 10 consecutive non-SES are detected.

Data Source

RNC_RXI

Source Field

pmUas

Source Section

T1Ttp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

T1Ttp_RNC

T3PhysPathTerm_NodeB Primitive Calculations

The following is a list of primitive calculations for the T3PhysPathTerm_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

T3PhysPathTerm_NodeB Peg Counts

The following is a list of peg counts for the T3PhysPathTerm_NodeB entity.

NodeB_RELEASE

Release

Data Source

RNC_RXI

Source Field

NodeB_RELEASE

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

T3PhysPathTerm_NodeB_Gen

pmEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEs

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

pmEsCpp

Transmission Errored Seconds (ES) based on C-bit parity. The number of seconds with block errors or equivalent during the PM interval.

Data Source

NodeB_RXI

Source Field

pmEsCpp

Source Section

T3PhysPathTerm

pmSes

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSes

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

pmSesCpp

Transmission Severely Errored Seconds (SES) based on C-bit parity. The number of seconds during available time that have a severe bit error rate or equivalent during the PM interval.

Data Source

NodeB_RXI

Source Field

pmSesCpp

Source Section

T3PhysPathTerm

pmUas

Transmission Unavailable Seconds (SES).

Data Source

NodeB_RXI

Source Field

pmUas

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

T3PhysPathTerm_RNC Primitive Calculations

The following is a list of primitive calculations for the T3PhysPathTerm_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

T3PhysPathTerm_RNC Peg Counts

The following is a list of peg counts for the T3PhysPathTerm_RNC entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

T3PhysPathTerm_RNC_Gen

pmEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEs

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

pmEsCpp

Transmission Errored Seconds (ES) based on C-bit parity. The number of seconds with block errors or equivalent during the PM interval.

Data Source

RNC_RXI

Source Field

pmEsCpp

Source Section

T3PhysPathTerm

pmSes

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSes

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

pmSesCpp

Transmission Severely Errored Seconds (SES) based on C-bit parity. The number of seconds during available time that have a severe bit error rate or equivalent during the PM interval.

Data Source

RNC_RXI

Source Field

pmSesCpp

Source Section

T3PhysPathTerm

pmUas

Transmission Unavailable Seconds (SES).

Data Source

RNC_RXI

Source Field

pmUas

Source Section

T3PhysPathTerm,T3Ttp,E3PhysPathTerm

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

ToneSenderService Primitive Calculations

The following is a list of primitive calculations for the ToneSenderService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

ToneSenderService Peg Counts

The following is a list of peg counts for the ToneSenderService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

ToneSenderService_Gen

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

ToneSenderSer_Gen

TransportNetw_NodeB Primitive Calculations

The following is a list of primitive calculations for the TransportNetw_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

TransportNetw_NodeB Peg Counts

The following is a list of peg counts for the TransportNetw_NodeB entity.

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

pmHDelayVarBest10Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 10% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

NodeB_RXI

Source Field

pmHDelayVarBest10Pct

Source Section

Synchronization

pmHDelayVarBest1Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 1% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

NodeB_RXI

Source Field

pmHDelayVarBest1Pct

Source Section

Synchronization

pmHDelayVarBest50Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 50% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

NodeB_RXI

Source Field

pmHDelayVarBest50Pct

Source Section

Synchronization

pmMaxDelayVariation

This counter shows the Maximum Delay Variation (see ITU-T Y.1540 for definition of the delay variation) experienced by the active IP synchronization reference during the PM interval.

Data Source

NodeB_RXI

Source Field

pmMaxDelayVariation

Source Section

Synchronization

TransportNetw_RNC Primitive Calculations

The following is a list of primitive calculations for the TransportNetw_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

TransportNetw_RNC Peg Counts

The following is a list of peg counts for the TransportNetw_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RXI

Source Field

PERLENSEC

Source Section

Sccpch_WMGeneral

pmHDelayVarBest10Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 10% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

RNC_RXI

Source Field

pmHDelayVarBest10Pct

Source Section

Synchronization

pmHDelayVarBest1Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 1% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

RNC_RXI

Source Field

pmHDelayVarBest1Pct

Source Section

Synchronization

pmHDelayVarBest50Pct

This counter shows the Highest Delay Variation (see ITU-T Y.1540 for definition of the delay variation) of the best 50% synchronization frames (with the lowest delay) experienced by the active IP synchronization reference during the PM interval.

Data Source

RNC_RXI

Source Field

pmHDelayVarBest50Pct

Source Section

Synchronization

pmMaxDelayVariation

This counter shows the Maximum Delay Variation (see ITU-T Y.1540 for definition of the delay variation) experienced by the active IP synchronization reference during the PM interval.

Data Source

RNC_RXI

Source Field

pmMaxDelayVariation

Source Section

Synchronization

TsService Primitive Calculations

The following is a list of primitive calculations for the TsService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentage of Seizures which are sucessful

Calculation

$$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$$

TsService Peg Counts

The following is a list of peg counts for the TsService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

TsService_Gen

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

TsService_Gen

UniSaalTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the UniSaalTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UniSaalTp_NodeB Peg Counts

The following is a list of peg counts for the UniSaalTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

UniSaalTp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UniSaalTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UniSaalTp_NodeB_WMGeneral

pmLinkInServiceTime

The Acc time in sec the signaling link has been in service since it was created

Data Source

NodeB_RNC_RXI

Source Field

pmLinkInServiceTime

Source Section

UniSaalTp_NodeB

pmNoOfAllSLFailures

Number of all Signaling link failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAllSLFailures

Source Section

UniSaalTp_NodeB

pmNoOfLocalCongestions

Number of loca cong.This count is incr when sum of SAAL send&retran buff are filled

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalCongestions

Source Section

UniSaalTp_NodeB

pmNoOfNoResponses

Number of no responses detected the last 30 minutes.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfNoResponses

Source Section

UniSaalTp_NodeB

pmNoOfOtherErrors

Number of other list element errors.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOtherErrors

Source Section

UniSaalTp_NodeB

pmNoOfProtocolErrors

Number of unsolicited or inappropriate PDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfProtocolErrors

Source Section

UniSaalTp_NodeB

pmNoOfReceivedSDUs

Number of successfully received SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReceivedSDUs

Source Section

UniSaalTp_NodeB

pmNoOfRemoteCongestions

Number remote cong. This counter increased when remote side gives SAAL no credit.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRemoteCongestions

Source Section

UniSaalTp_NodeB

pmNoOfSentSDUs

Number of successfully sent SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSentSDUs

Source Section

UniSaalTp_NodeB

pmNoOfSequenceDataLosses

Number of data sequences loss.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSequenceDataLosses

Source Section

UniSaalTp_NodeB

pmNoOfUnsuccReTransmissions

Number of unsuccessful retransmissions.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUnsuccReTransmissions

Source Section

UniSaalTp_NodeB

UniSaalTp_RNC Primitive Calculations

The following is a list of primitive calculations for the UniSaalTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

" "

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UniSaalTp_RNC Peg Counts

The following is a list of peg counts for the UniSaalTp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UniSaalTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UniSaalTp_RNC_WMGeneral

pmLinkInServiceTime

The Acc time in sec the signaling link has been in service since it was created

Data Source

NodeB_RNC_RXI

Source Field

pmLinkInServiceTime

Source Section

UniSaalTp_RNC

pmNoOfAllSLFailures

Number of all Signaling link failures.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfAllSLFailures

Source Section

UniSaalTp_RNC

pmNoOfLocalCongestions

Number of loca cong.This count is incr when sum of SAAL send&retran buff are filled

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfLocalCongestions

Source Section

UniSaalTp_RNC

pmNoOfNoResponses

Number of no responses detected the last 30 minutes.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfNoResponses

Source Section

UniSaalTp_RNC

pmNoOfOtherErrors

Number of other list element errors.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfOtherErrors

Source Section

UniSaalTp_RNC

pmNoOfProtocolErrors

Number of unsolicited or inappropriate PDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfProtocolErrors

Source Section

UniSaalTp_RNC

pmNoOfReceivedSDUs

Number of successfully received SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReceivedSDUs

Source Section

UniSaalTp_RNC

pmNoOfRemoteCongestions

Number remote cong. This counter increased when remote side gives SAAL no credit.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRemoteCongestions

Source Section

UniSaalTp_RNC

pmNoOfSentSDUs

Number of successfully sent SDUs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSentSDUs

Source Section

UniSaalTp_RNC

pmNoOfSequenceDataLosses

Number of data sequences loss.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSequenceDataLosses

Source Section

UniSaalTp_RNC

pmNoOfUnsuccReTransmissions

Number of unsuccessful retransmissions.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfUnsuccReTransmissions

Source Section

UniSaalTp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

UniSaalTp_RNC

UplinkBaseBandPool Primitive Calculations

The following is a list of primitive calculations for the UplinkBaseBandPool entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

k_CE_UL_CONG

Number of setup failures due to RAXB pool congestion

Calculation

vsum(pmSetupFailuresSf16,pmSetupFailuresSf64)

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

UplinkBaseBandPool Peg Counts

The following is a list of peg counts for the UplinkBaseBandPool entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

UplinkBaseBandPool

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UplinkBaseBandPool_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

UplinkBaseBandPool_WMGeneral

pmApomcOfRachCap

The average Uplink (UL) Random Access (RAX) capacity usage of the UL Baseband Pool (BBP), in percent. The UL BBP consists of the configured RAX board resources. The percentage used of the maximum UL RAX capacity (channel elements) of the UL BBP, is sample

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfRachCap

Source Section

UplinkBaseBandPool

pmApomcOfRakeRecUsed

The average percentage of maximum capacity for Number of Rake Receivers used on the Uplink baseband pool

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfRakeRecUsed

Source Section

UplinkBaseBandPool

pmApomcOfUILinkCap

The average used percentage of maximum capacity for Uplink Link Capacity on the Uplink baseband pool

Data Source

NodeB_RNC_RXI

Source Field

pmApomcOfUILinkCap

Source Section

UplinkBaseBandPool

pmHwCePoolEul_00

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 0..10CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_01

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 10..20CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_02

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 20..30CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_03

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 30..40CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_04

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 40..50CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_05

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 50..60CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_06

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 60..70CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_07

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 70..80CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_08

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 80..90CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_09

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 90..100CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_10

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 100..120CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_11

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 120..140CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_12

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 140..160CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_13

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 160..180CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_14

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 180..200CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_15

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 200..220CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_16

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 220..240CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_17

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 240..260CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_18

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 260..280CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_19

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 280..300CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_20

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 300..320CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_21

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 320..340CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_22

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 340..360CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_23

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 360..380CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_24

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 380..400CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_25

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 400..420CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_26

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 420..440CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_27

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 440..460CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_28

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 460..480CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_29

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 480..500CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_30

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 500..520CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_31

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 520..540CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_32

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 540..560CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_33

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 560..580CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_34

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 580..600CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_35

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 600..620CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_36

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 620..640CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_37

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 640..660CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_38

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 660..680CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_39

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 680..700CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_40

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 700..720CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_41

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 720..740CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_42

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 740..760CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_43

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 760..780CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_44

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 780..800CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_45

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 800..820CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_46

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 820..840CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_47

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 840..860CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_48

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 860..880CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_49

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 880..900CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_50

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 900..920CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_51

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 920..940CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_52

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 940..960CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_53

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 960..980CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_54

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range 980..1000CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmHwCePoolEul_55

Counter for the total sum of Channel Elements (Ces) allocated on the UL hardware by the E-UL scheduler. Number of samples in range ≥ 1000 CE

Data Source

NodeB

Source Field

pmHwCePoolEul

Source Section

UplinkBaseBandPool

pmNoOfIbho

Number of movement of connections on the Uplink baseband pool during a 15 minutes period

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIbho

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_00

Number of RadioLinks in use (SF128) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_01

Number of RadioLinks in use (SF128) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_02

Number of RadioLinks in use (SF128) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_03

Number of RadioLinks in use (SF128) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_04

Number of RadioLinks in use (SF128) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_05

Number of RadioLinks in use (SF128) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_06

Number of RadioLinks in use (SF128) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_07

Number of RadioLinks in use (SF128) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_08

Number of RadioLinks in use (SF128) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_09

Number of RadioLinks in use (SF128) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_10

Number of RadioLinks in use (SF128) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_11

Number of RadioLinks in use (SF128) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_12

Number of RadioLinks in use (SF128) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_13

Number of RadioLinks in use (SF128) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf128_14

Number of RadioLinks in use (SF128) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf128

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_00

Number of RadioLinks in use (SF16) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_01

Number of RadioLinks in use (SF16) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_02

Number of RadioLinks in use (SF16) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_03

Number of RadioLinks in use (SF16) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_04

Number of RadioLinks in use (SF16) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_05

Number of RadioLinks in use (SF16) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_06

Number of RadioLinks in use (SF16) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_07

Number of RadioLinks in use (SF16) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_08

Number of RadioLinks in use (SF16) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_09

Number of RadioLinks in use (SF16) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_10

Number of RadioLinks in use (SF16) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_11

Number of RadioLinks in use (SF16) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_12

Number of RadioLinks in use (SF16) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_13

Number of RadioLinks in use (SF16) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf16_14

Number of RadioLinks in use (SF16) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf16

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_00

Number of RadioLinks in use (SF256) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_01

Number of RadioLinks in use (SF256) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_02

Number of RadioLinks in use (SF256) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_03

Number of RadioLinks in use (SF256) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_04

Number of RadioLinks in use (SF256) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_05

Number of RadioLinks in use (SF256) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_06

Number of RadioLinks in use (SF256) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_07

Number of RadioLinks in use (SF256) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_08

Number of RadioLinks in use (SF256) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_09

Number of RadioLinks in use (SF256) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_10

Number of RadioLinks in use (SF256) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_11

Number of RadioLinks in use (SF256) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_12

Number of RadioLinks in use (SF256) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_13

Number of RadioLinks in use (SF256) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf256_14

Number of RadioLinks in use (SF256) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf256

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_00

Number of RadioLinks in use (SF32) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_01

Number of RadioLinks in use (SF32) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_02

Number of RadioLinks in use (SF32) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_03

Number of RadioLinks in use (SF32) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_04

Number of RadioLinks in use (SF32) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_05

Number of RadioLinks in use (SF32) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_06

Number of RadioLinks in use (SF32) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_07

Number of RadioLinks in use (SF32) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_08

Number of RadioLinks in use (SF32) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_09

Number of RadioLinks in use (SF32) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_10

Number of RadioLinks in use (SF32) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_11

Number of RadioLinks in use (SF32) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_12

Number of RadioLinks in use (SF32) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_13

Number of RadioLinks in use (SF32) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf32_14

Number of RadioLinks in use (SF32) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf32

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_00

Number of RadioLinks in use (SF4) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_01

Number of RadioLinks in use (SF4) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_02

Number of RadioLinks in use (SF4) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_03

Number of RadioLinks in use (SF4) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_04

Number of RadioLinks in use (SF4) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_05

Number of RadioLinks in use (SF4) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_06

Number of RadioLinks in use (SF4) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_07

Number of RadioLinks in use (SF4) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_08

Number of RadioLinks in use (SF4) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_09

Number of RadioLinks in use (SF4) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_10

Number of RadioLinks in use (SF4) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_11

Number of RadioLinks in use (SF4) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_12

Number of RadioLinks in use (SF4) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_13

Number of RadioLinks in use (SF4) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf4_14

Number of RadioLinks in use (SF4) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf4

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_00

Number of RadioLinks in use (SF64) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_01

Number of RadioLinks in use (SF64) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_02

Number of RadioLinks in use (SF64) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_03

Number of RadioLinks in use (SF64) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_04

Number of RadioLinks in use (SF64) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_05

Number of RadioLinks in use (SF64) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_06

Number of RadioLinks in use (SF64) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_07

Number of RadioLinks in use (SF64) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_08

Number of RadioLinks in use (SF64) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_09

Number of RadioLinks in use (SF64) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_10

Number of RadioLinks in use (SF64) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_11

Number of RadioLinks in use (SF64) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_12

Number of RadioLinks in use (SF64) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_13

Number of RadioLinks in use (SF64) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf64_14

Number of RadioLinks in use (SF64) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf64

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_00

Number of RadioLinks in use (SF8) (minute 1 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_01

Number of RadioLinks in use (SF8) (minute 2 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_02

Number of RadioLinks in use (SF8) (minute 3 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_03

Number of RadioLinks in use (SF8) (minute 4 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_04

Number of RadioLinks in use (SF8) (minute 5 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_05

Number of RadioLinks in use (SF8) (minute 6 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_06

Number of RadioLinks in use (SF8) (minute 7 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_07

Number of RadioLinks in use (SF8) (minute 8 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_08

Number of RadioLinks in use (SF8) (minute 9 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_09

Number of RadioLinks in use (SF8) (minute 10 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_10

Number of RadioLinks in use (SF8) (minute 11 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_11

Number of RadioLinks in use (SF8) (minute 12 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_12

Number of RadioLinks in use (SF8) (minute 13 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_13

Number of RadioLinks in use (SF8) (minute 14 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoOfRadioLinksSf8_14

Number of RadioLinks in use (SF8) (minute 15 of 15)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRadioLinksSf8

Source Section

UplinkBaseBandPool

pmNoUIHwLimitEul

PEG Counter for the number of times a scheduling decision is taken to increase the hardware rate of an E-DCH user and there is a need to decrease the hardware rate for another E-DCH user owing to UL hardware resource limitations. Trigger: The counter is stepped when a scheduling decision is taken to increase the hardware rate for an E-DCH user and there is a need to decrease the hardware rate for another E-DCH user owing to UL hardware resource limitations.

Data Source

NodeB

Source Field

pmNoUIHwLimitEul

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf128

The number of setup attempts on the UL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf128

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf16

The number of setup attempts on the UL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf16

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf256

The number of setup attempts on the UL base band pool. Spreading Factor 256

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf256

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf32

The number of setup attempts on the UL base band pool. Spreading Factor 32

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf32

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf4

The number of setup attempts on the UL base band pool. Spreading Factor 4

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf4

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf64

The number of setup attempts on the UL base band pool. Spreading Factor 64

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf64

Source Section

UplinkBaseBandPool

pmSetupAttemptsSf8

The number of setup attempts on the UL base band pool. Spreading Factor 8

Data Source

NodeB_RNC_RXI

Source Field

pmSetupAttemptsSf8

Source Section

UplinkBaseBandPool

pmSetupFailuresSf128

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 128

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf128

Source Section

UplinkBaseBandPool

pmSetupFailuresSf16

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 16

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf16

Source Section

UplinkBaseBandPool

pmSetupFailuresSf256

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 256

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf256

Source Section

UplinkBaseBandPool

pmSetupFailuresSf32

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 32

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf32

Source Section

UplinkBaseBandPool

pmSetupFailuresSf4

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 4

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf4

Source Section

UplinkBaseBandPool

pmSetupFailuresSf64

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 64

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf64

Source Section

UplinkBaseBandPool

pmSetupFailuresSf8

The no of setup fail due to RAXB cong on UL base band pool. Spreading Factor 8

Data Source

NodeB_RNC_RXI

Source Field

pmSetupFailuresSf8

Source Section

UplinkBaseBandPool

pmUIActPeakCapUsage

The actual UL peak capacity use of the Uplink baseband pool during the GP.

Data Source

NodeB

Source Field

pmUIActPeakCapUsage

Source Section

UplinkBaseBandPool

UpMfhService Primitive Calculations

The following is a list of primitive calculations for the UpMfhService entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_Seizures_Sucess_Rate

Percentege of Seizures which are sucessful

Calculation

$100.0 * \text{vsum}(\text{pmTotalSeizures}, -1 * \text{pmUnsuccSeizures}) / \text{pmTotalSeizures}$

UpMfhService Peg Counts

The following is a list of peg counts for the UpMfhService entity.

PERLENSEC

Period length in seconds

Data Source

RNC_RXI

Source Field

PERLENSEC

Source Section

UpMfhService_Gen

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Ura Primitive Calculations

The following is a list of primitive calculations for the Ura entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Ura Peg Counts

The following is a list of peg counts for the Ura entity.

PERLENSEC

Period length in seconds

Data Source

RNC

Source Field

gp

Source Section

Ura

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

RNC

Source Field

gp

Source Section

Ura

pmCnInitPagingToUraUe

Number of CN initiated pages attempted for UEs in URA_PCH state.

Data Source

RNC

Source Field

pmCnInitPagingToUraUe

Source Section

Ura

pmSamplesRabUra

Number of samples recorded within the ROP period for number of PS Interactive RABs in URA_PCH.

Data Source

RNC

Source Field

pmSamplesRabUra

Source Section

Ura

pmSumRabUra

Sum of all sample values recorded for number of PS Interactive RABs in URA_PCH.

Data Source

RNC

Source Field

pmSumRabUra

Source Section

Ura

pmUtranInitPagingToUraUe

Number of Utran initiated pages attempted for UEs in URA_PCH state.

Data Source

RNC

Source Field

pmUtranInitPagingToUraUe

Source Section

Ura

UtranCell Primitive Calculations

The following is a list of primitive calculations for the UtranCell entity.

AveCs12Ps0RabEstablish

Average number of active CS12 and PS0 multi-RAB connections (Erlang).

Calculation

$\text{pmSumCs12Ps0RabEstablish} * 1.0 / \text{pmSamplesCs12Ps0RabEstablish}$

AveCs12Ps64RabEstablish

Average number of active CS12 and PS64 multi-RAB connections (Erlang).

Calculation

$\text{pmSumCs12Ps64RabEstablish} * 1.0 / \text{pmSamplesCs12Ps64RabEstablish}$

AveCs12RabEstablish

Average number of active voice 12.2 kbps RAB connections (Erlang).

Calculation

$\text{pmSumCs12RabEstablish} * 1.0 / \text{pmSamplesCs12RabEstablish}$

AveCs57RabEstablish

Average number of active Circuit Switched 57 kbps RAB connections (Erlang).

Calculation

$\text{pmSumCs57RabEstablish} * 1.0 / \text{pmSamplesCs57RabEstablish}$

AveCs64RabEstablish

Average number of active Circuit Switched 64 kbps RAB connections (Erlang).

Calculation

$\text{pmSumCs64RabEstablish} * 1.0 / \text{pmSamplesCs64RabEstablish}$

AvePs128RabEstablish

Average number of active Packet Switched 128 kbps RAB connections (Erlang).

Calculation

$\text{pmSumPs128RabEstablish} * 1.0 / \text{pmSamplesPs128RabEstablish}$

AvePs384RabEstablish

Average number of active Packet Switched 384 kbps RAB connections (Erlang).

Calculation

$\text{pmSumPs384RabEstablish} * 1.0 / \text{pmSamplesPs384RabEstablish}$

AvePs64RabEstablish

Average number of active Packet Switched 64 kbps RAB connections (Erlang).

Calculation

$\text{pmSumPs64RabEstablish} * 1.0 / \text{pmSamplesPs64RabEstablish}$

Average_CS_Speech_Users_per_Cell

The average number of speech users per UtranCell in a measurement period of 15 minutes. The sum is performed on the result of the fraction

Calculation

$\text{pmSumBestCs12Establish} / \text{pmSamplesBestCs12Establish}$

AverageBestCs12Establish

Average Distict CS Speech Users

Calculation

$\text{pmSumBestCs12Establish} * 1.0 / \text{pmSamplesBestCs12Establish}$

AveRrcOnlyEstablish

Average number of connections with only RRC established (Erlang).

Calculation

$\text{pmSumRrcOnlyEstablish} * 1.0 / \text{pmSamplesRrcOnlyEstablish}$

Cell_Availability

The length of time in seconds that a cell is available for service is defined as cell availability. For example, cell availability during 24 hour period can be calculated. Only Daily reports with 24 hour observation period produce proper value for this PC

Calculation

$86400 - \text{vsum} (\text{pmCellDowntimeAuto} , \text{pmCellDowntimeMan})$

Cell_Availability_Excluding_Planned_Downtime

The length of time in seconds that a cell availability excluding planned or manual downtime for service during the period of operation is defined as cell availability excluding planned downtime. Only Daily reports with 24 hour observation period produce

Calculation

$100.0 * (86400 - \text{pmCellDowntimeAuto}) / 86400$

Cell_Availability_UnPlanned_Downtime

The length of time in seconds that a cell availability excluding planned or manual downtime for service during the period of operation is defined as cell availability excluding planned downtime. Only Daily reports with 24 hour observation period produce

Calculation

$100.0 * (86400 - \text{pmCellDowntimeAuto}) / 86400$

Cell_Unavailability_due_Planned_Down_Time

The length of time in seconds that a cell availability with planned or manual downtime for service during the period of operation is defined as cell availability excluding planned downtime. Only Daily reports with 24 hour observation period produce prop

Calculation

$100.0 * \text{pmCellDowntimeMan} / 86400$

CELL_UPD_FAIL

% Cell update fail rate (including both periodic and cell reselection)

Calculation

$(\text{pmNoCellUpdAttempt} - \text{pmNoCellUpdSuccess}) * 100.0 / \text{pmNoCellUpdAttempt}$

CH_SW_DCH_DCH_FAIL

% Failed channel switching between Dedicated Channels (DCH/DCH)

Calculation

$\text{pmFailedDchChSwitch} * 100.0 / \text{vsum}(\text{pmChSwitchSp0Sp64}, \text{pmChSwitchSp64Sp0},$
 $\text{pmChSwitchP384P128}, \text{pmChSwitchP128P64}, \text{pmChSwitchP64P128},$
 $\text{pmChSwitchP128P384}, \text{pmNoOfSwDownNgHo})$

CH_SW_FACH_DCH_FAIL

% Failed channel switching CELL_FACH to CELL_DCH and CELL_DCH to CELL_FACH

Calculation

$\text{pmFailedChSwitch} * 100.0 / \text{vsum}(\text{pmChSwitchFachDch}, \text{pmChSwitchDch64Fach},$
 $\text{pmChSwitchDch128Fach}, \text{pmChSwitchDch384Fach})$

CS_64_57_Accessibility_Grade_of_Service

The blocking rate for both CS 64 and 57 calls per UtranCell due to admission based on downlink power, downlink channelization code, downlink Average Speech Equivalent (ASE)

Calculation

$100.0 * \text{pmNoOfNonHoReqDeniedCs} / \text{vsum}(\text{pmNoRabEstablishAttemptCs64},$
 $\text{pmNoRabEstablishAttemptCs57})$

CS_64_DL_Code_Utilization

The average number of downlink code is occupied for CS 64 traffic per UtranCell in a measurement period

Calculation

$\text{pmSumCs64RabEstablish} / \text{pmSamplesCs64RabEstablish}$

CS_Call_Completion_Succ_Rate_retry_Excluded

The call completion success rate per UtranCell for speech for Directed_retry_Excluded

Calculation

$\text{CS_Speech_Accessibility_Directed_retry_Excluded} * (1 -$
 $\text{CS_Speech_Drop_Rate}) / 100.0$

CS_Call_Completion_Succ_Rate_retry_Included

The call completion success rate per UtranCell for speech for Directed_retry_Included

Calculation

$$\text{CS_Speech_Accessibility_Directed_retry_Included} * (1 - \text{CS_Speech_Drop_Rate}) / 100.0$$

CS_Retain_Speech_Drop_Rate

The drop rate per UtranCell for speech

Calculation

$$100.0 * \text{pmNoSystemRabReleaseSpeech} / \text{vsum} (\text{pmNoNormalRabReleaseSpeech} , \text{pmNoSystemRabReleaseSpeech})$$

CS_Speech_Accessibility_Directed_retry_Excluded

Accessibility success rate per UtranCell for speech where directed-retry was not counted as access failure.

Calculation

$$100.0 * (\text{pmTotNoRrcConnectReqCsSucc} * \text{pmNoRabEstablishSuccessSpeech}) / (\text{pmTotNoRrcConnectReqCs} * (\text{pmNoRabEstablishAttemptSpeech} - \text{pmNoDirRetryAtt}))$$

CS_Speech_Accessibility_Directed_retry_Included

Accessibility success rate per UtranCell for speech where directed-retry was counted as access failure.

Calculation

$$100.0 * (\text{pmTotNoRrcConnectReqCsSucc} * \text{pmNoRabEstablishSuccessSpeech}) / (\text{pmTotNoRrcConnectReqCs} * \text{pmNoRabEstablishAttemptSpeech})$$

CS_Speech_Downlink_Code_Utilization

The average number of downlink code is occupied for speech traffic per UtranCell in a measurement period of 15 minutes

Calculation

$$\text{pmSumCs12RabEstablish} / \text{pmSamplesCs12RabEstablish}$$

CS_Speech_Downlink_Code_Utilization_per_Cell

The average number of downlink code is occupied for speech traffic per UtranCell in a measurement period of 15 minutes

Calculation

$$\text{pmSumCs12RabEstablish} / \text{pmSamplesCs12RabEstablish}$$

CS_Speech_Drop_Rate

The drop rate per UtranCell for speech

Calculation

$$100.0 * \text{pmNoSystemRabReleaseSpeech} / \text{vsum} (\text{pmNoNormalRabReleaseSpeech} , \text{pmNoSystemRabReleaseSpeech})$$

CS_Speech_Erlang

The average speech traffic Erlang carried per UtranCell . This is best fitted with Erlang definition through hourly report which is the same as 4 consecutive 15 minutes periods.

Calculation

$$\text{pmSumBestCs12Establish} / \text{pmSamplesBestCs12Establish}$$

CS_Speech_Grade_of_Service

Blocking rate for speech calls per UtranCell due to admission based on downlink power, downlink channelization code, downlink Average Speech Equivalent (ASE), and uplink Average Speech Equivalent. Note RRC Connection failure rate better approximate speech

Calculation

$$100.0 * \text{pmNoOfNonHoReqDeniedSpeech} / \text{pmNoRabEstablishAttemptSpeech}$$

CS_Speech_Grade_of_Service_RRC_Blocking

Signaling failure and blocking for RRC connections that winds up with Circuit-Switched data connection and does not include blocking for multi-RAB establishment for speech.
Conversational Call (originating and terminating) RRC connection Success Rate

Calculation

$$100.0 * \text{pmTotNoRrcConnectReqCsSucc} / \text{pmTotNoRrcConnectReqCs}$$

CS_Speech_Retainability

The Retainability per UtranCell for speech

Calculation

$$100.0 - (100.0 * \text{pmNoSystemRabReleaseSpeech} / \text{vsum} (\text{pmNoNormalRabReleaseSpeech} , \text{pmNoSystemRabReleaseSpeech}))$$

CS57_Accessibility

Accessibility success rate per UtranCell for CS streaming

Calculation

$$100.0 * (\text{pmTotNoRrcConnectReqCsSucc} * \text{pmNoRabEstablishSuccessCs57}) / (\text{pmTotNoRrcConnectReqCs} * \text{pmNoRabEstablishAttemptCs57})$$

CS57_Call_Completion_Succ_Rate

The call completion success rate per UtranCell for CS streaming

Calculation

$$\text{CS57_Accessibility} * (1 - \text{CS57_Drop_Rate}) / 100.0$$

CS57_Drop_Rate

The drop rate per UtranCell for CS Streaming

Calculation

$$100.0 * \text{pmNoSystemRabReleaseCsStream} / \text{vsum} (\text{pmNoNormalRabReleaseCsStream} , \text{pmNoSystemRabReleaseCsStream})$$

CS57_Retainability

The Retainability per UtranCell for CS Streaming

Calculation

$$100.0 - (100.0 * \text{pmNoSystemRabReleaseCsStream} / \text{vsum} (\text{pmNoNormalRabReleaseCsStream} , \text{pmNoSystemRabReleaseCsStream}))$$

CS64_Accessibility

Accessibility success rate per UtranCell for CS 64

Calculation

$$100.0 * (\text{pmTotNoRrcConnectReqCsSucc} * \text{pmNoRabEstablishSuccessCs64}) / (\text{pmTotNoRrcConnectReqCs} * \text{pmNoRabEstablishAttemptCs64})$$

CS64_Call_Completion_Succ_Rate

The call completion success rate per UtranCell for CS 64

Calculation

$$\text{CS64_Accessibility} * (1 - \text{CS64_Drop_Rate}) / 100.0$$

CS64_Drop_Rate

The drop rate per UtranCell for CS 64

Calculation

$$100.0 * \text{pmNoSystemRabReleaseCs64} / \text{vsum} (\text{pmNoNormalRabReleaseCs64} , \text{pmNoSystemRabReleaseCs64})$$

CS64_Retainability

The Retainability per UtranCell for CS 64

Calculation

$$100.0 - (100.0 * \text{pmNoSystemRabReleaseCs64} / \text{vsum} (\text{pmNoNormalRabReleaseCs64} , \text{pmNoSystemRabReleaseCs64}))$$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

GSM_CELL_CHANGE_IN_FAIL

RRC conn estab fail rate % with estab cause "Inter-RAT cell reselection" or "Inter-RAT cell change order"

Calculation

$$100 - \text{vsum}(\text{pmTotNoRrcConnectSuccessIratCcOrder}, \text{pmTotNoRrcConnectSuccessIratCellResel}) * 100.0 / \text{vsum}(\text{pmTotNoRrcConnectAttIratCcOrder}, \text{pmTotNoRrcConnectAttIratCellResel})$$

GSM_CELL_CHANGE_OUT_FAIL

Outgoing cell change fail rate % on Packet switched RABs

Calculation

$$100 * \text{AGGR}(\text{GsmRelation}, \text{pmNoOutIratCcReturnOldCh} * 1.0 / \text{pmNoOutIratCcAtt})$$

GSM_HO_IN_FAIL

GSM to UMTS handover failure rate % for CS RAB types

Calculation

$$(\text{pmNoInCsIratHoAtt} - \text{pmNoInCsIratHoSuccess}) * 100.0 / \text{pmNoInCsIratHoAtt}$$

GSM_HO_OUT_FAIL

UMTS to GSM circuit switched handover failure rate %

Calculation

$$\text{AGGR}(\text{GsmRelation}, \text{GSM_HO_OUT_FAIL})$$

Handover_Reduction_Factor

The Handover Reduction Factor (HRF) for speech is defined as the ratio of downlink code channel utilization for speech and the average number speech users served. This metric shows how much of the radio resources (code and power) are used to support soft handover.

Calculation

$$\text{CS_Speech_Downlink_Code_Utilization} / \text{Average_CS_Speech_Users_per_Cell}$$

k_CARR_PWR_DL_AVE

Average carrier downlink transmit power (pmTransmittedCarrierPower)

Calculation

$$\text{AGGR}(\text{Carrier}, \text{k_CARR_PWR_DL_AVE})$$

k_CONG_CSD

Number of Circuit Switched data connections terminated due to congestion

Calculation

$$\text{vsum}(\text{pmNoOfTermCsCong}, \text{pmNoOfIurTermCsCong})$$

k_CONG_PSD

Number of Packet Switched data users switched down to common channel due to congestion or released if (RNC level) parameter not allowing PS on common channel is set.

Calculation

$$\text{vsum}(\text{pmNoOfSwDownNgCong}, \text{pmNoOfIurSwDownNgCong})$$

k_CONG_SPEECH

Number of speech radio connections served terminated due to congestion

Calculation

$$\text{vsum}(\text{pmNoOfTermSpeechCong}, \text{pmNoOfIurTermSpeechCong})$$

k_DL_KB_PER_DROP

Number of transferred kB in downlink per dropped connection (DCH and FACH)

Calculation

$$\begin{aligned} &(\text{vsum}(\text{pmDlTrafficVolumeCs12}, \text{pmDlTrafficVolumeCs57}, \text{pmDlTrafficVolumeCs64}, \\ &\text{pmDlTrafficVolumeCs12Ps0}, \text{pmDlTrafficVolumeCs12Ps64}, \text{pmDlTrafficVolumeP-} \\ &\text{sCommon}, \text{pmDlTrafficVolumePs64}, \text{pmDlTrafficVolumePs128}, \\ &\text{pmDlTrafficVolumePs384}) / 8) / (\text{pmNoCellDchDisconnectAbnorm} + \text{pmNoCellFach-} \\ &\text{DisconnectAbnorm}) \end{aligned}$$

k_RAB_PER_FACH

Average number of RABs per FACH channel.

Calculation

$$\text{pmSumRabFach} / \text{pmSamplesRabFach}$$

k_RRC_ABNORM_DISCONN

Total number of abnormal disconnections from dedicated and common channels (DCH and FACH states)

Calculation

$\text{vsum}(\text{pmNoCellDchDisconnectAbnorm}, \text{pmNoCellFachDisconnectAbnorm})$

k_RRC_ABNORM_DISCONN_CS64

RRC connection failure rate % for CS64 traffic. (Does not include other CS RABs.)

Calculation

$100.0 * \text{pmNoCs64DchDiscAbnorm} / (\text{pmNoCs64DchDiscNormal} + \text{pmNoCs64DchDiscAbnorm})$

k_RRC_ABNORM_DISCONN_PS

RRC connection failure rate % for Packet Switched traffic.

Calculation

$100.0 * \text{pmNoPacketDchDiscAbnorm} / (\text{pmNoPacketDchDiscNormal} + \text{pmNoPacketDchDiscAbnorm})$

k_RRC_ABNORM_DISCONN_RATE

RRC connection failure rate %

Calculation

$100.0 * \text{vsum}(\text{pmNoCellDchDisconnectAbnorm}, \text{pmNoCellFachDisconnectAbnorm}) / \text{vsum}(\text{pmNoCellDchDisconnectAbnorm}, \text{pmNoCellFachDisconnectAbnorm}, \text{pmNoCellDchDisconnectNormal}, \text{pmNoCellFachDisconnectNormal})$

k_RRC_ABNORM_DISCONN_SPEECH

RRC connection failure rate % for Speech traffic. (Does not include other CS RABs.)

Calculation

$100.0 * \text{pmNoSpeechDchDiscAbnorm} / (\text{pmNoSpeechDchDiscNormal} + \text{pmNoSpeechDchDiscAbnorm})$

k_RRC_ABNORM_DISCONN_STREAM

RRC connection failure rate % for CS57.6 streaming traffic.

Calculation

$100.0 * \text{pmNoCsStreamDchDiscAbnorm} / (\text{pmNoCsStreamDchDiscNormal} + \text{pmNoCsStreamDchDiscAbnorm})$

k_RRC_CONN_FAIL

RRC connection failures

Calculation

$\text{pmTotNoRrcConnectReq} - \text{pmTotNoRrcConnectReqSuccess}$

k_RRC_CONN_FAIL_CS

RRC connection failure rate % for Circuit Switched traffic

Calculation

$(\text{pmTotNoRrcConnectReqCs} - \text{pmTotNoRrcConnectReqCsSucc}) * 100.0 / \text{pmTotNoRrcConnectReqCs}$

k_RRC_CONN_FAIL_PS

RRC connection failure rate % for Packet Switched traffic

Calculation

$(\text{pmTotNoRrcConnectReqPs} - \text{pmTotNoRrcConnectReqPsSucc}) * 100.0 / \text{pmTotNoRrcConnectReqPs}$

k_RRC_CONN_FAIL_RATE

RRC connection failure rate %

Calculation

$(\text{pmTotNoRrcConnectReq} - \text{pmTotNoRrcConnectReqSuccess}) * 100.0 / \text{pmTotNoRrcConnectReq}$

k_SHO_AVE_ACT_SET

Average number of radio links in the active set (includes both soft and softer handover)

Calculation

$$\frac{\text{vsum}(1 * \text{pmSumUesWith1Rls1RlInActSet}, 2 * \text{pmSumUesWith1Rls2RlInActSet}, 3 * \text{pmSumUesWith1Rls3RlInActSet}, 2 * \text{pmSumUesWith2Rls2RlInActSet}, 3 * \text{pmSumUesWith2Rls3RlInActSet}, 4 * \text{pmSumUesWith2Rls4RlInActSet}, 3 * \text{pmSumUesWith3Rls3RlInActSet}, 4 * \text{pmSumUesWith3Rls4RlInActSet}, 4 * \text{pmSumUesWith4Rls4RlInActSet}) * 1.0}{\text{vsum}(\text{pmSumUesWith1Rls1RlInActSet}, \text{pmSumUesWith1Rls2RlInActSet}, \text{pmSumUesWith1Rls3RlInActSet}, \text{pmSumUesWith2Rls2RlInActSet}, \text{pmSumUesWith2Rls3RlInActSet}, \text{pmSumUesWith2Rls4RlInActSet}, \text{pmSumUesWith3Rls3RlInActSet}, \text{pmSumUesWith3Rls4RlInActSet}, \text{pmSumUesWith4Rls4RlInActSet})}$$

k_SHO_AVE_ACT_SET_P2_1

Average number of radio links in the active set (includes both soft and softer handover)

Calculation

```
vsum(1 * pmSumUesWith1Rls1RlInActSet, 2 * pmSumUesWith1Rls2RlInActSet, 3 *  
pmSumUesWith1Rls3RlInActSet, 2 * pmSumUesWith2Rls2RlInActSet, 3 *  
pmSumUesWith2Rls3RlInActSet, 4 * pmSumUesWith2Rls4RlInActSet, 3 *  
pmSumUesWith3Rls3RlInActSet, 4 * pmSumUesWith3Rls4RlInActSet, 4 *  
pmSumUesWith4Rls4RlInActSet) * 1.0 / vsum(pmSumUesWith1Rls1RlInActSet,  
pmSumUesWith1Rls2RlInActSet, pmSumUesWith1Rls3RlInActSet,  
pmSumUesWith2Rls2RlInActSet, pmSumUesWith2Rls3RlInActSet,  
pmSumUesWith2Rls4RlInActSet, pmSumUesWith3Rls3RlInActSet,  
pmSumUesWith3Rls4RlInActSet, pmSumUesWith4Rls4RlInActSet)
```

k_SHO_LEG_ADD_FAIL

Fraction of handover leg fails to be added to an active set %

Calculation

```
100.0 * pmNoTimesCellFailAddToActSet / vsum(pmNoTimesRlAddToActSet, pmNo-  
TimesRlRepInActSet, pmNoTimesCellFailAddToActSet)
```

k_SHO_RATIO

Ratio of UEs in soft handover %

Calculation

```
vsum(pmSumUesWith1Rls2RlInActSet,  
pmSumUesWith1Rls3RlInActSet, pmSumUesWith2Rls2RlInActSet,  
pmSumUesWith2Rls3RlInActSet, pmSumUesWith2Rls4RlInActSet,  
pmSumUesWith3Rls3RlInActSet, pmSumUesWith3Rls4RlInActSet,  
pmSumUesWith4Rls4RlInActSet) * 100.0 / vsum(pmSumUesWith1Rls1RlInActSet,  
pmSumUesWith1Rls2RlInActSet, pmSumUesWith1Rls3RlInActSet,  
pmSumUesWith2Rls2RlInActSet, pmSumUesWith2Rls3RlInActSet,  
pmSumUesWith2Rls4RlInActSet, pmSumUesWith3Rls3RlInActSet,  
pmSumUesWith3Rls4RlInActSet, pmSumUesWith4Rls4RlInActSet)
```

k_SHO_RATIO_P2_1

Ratio of UEs in softer handover % (does not include softer handover)

Calculation

```
vsum(pmSumUesWith2Rls2RlInActSet, pmSumUesWith2Rls3RlInActSet,  
pmSumUesWith2Rls4RlInActSet, pmSumUesWith3Rls3RlInActSet,  
pmSumUesWith3Rls4RlInActSet, pmSumUesWith4Rls4RlInActSet) * 100.0 /  
vsum(pmSumUesWith1Rls1RlInActSet, pmSumUesWith1Rls2RlInActSet,  
pmSumUesWith1Rls3RlInActSet, pmSumUesWith2Rls2RlInActSet,  
pmSumUesWith2Rls3RlInActSet, pmSumUesWith2Rls4RlInActSet,  
pmSumUesWith3Rls3RlInActSet, pmSumUesWith3Rls4RlInActSet,  
pmSumUesWith4Rls4RlInActSet)
```

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

p_ActDlRlcTotPacketThp

Average value of DL RLC throughput measurements, including user data, retransmissions, padding bits, data PDU headers and RLC control PDU

Calculation

$100.0 * (\text{pmSumActDlRlcTotPacketThp} / \text{pmSamplesActDlRlcTotPacketThp})$

p_ActDlRlcUserPacketThp

Average value of DL RLC throughput including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU

Calculation

$100.0 * (\text{pmSumActDlRlcUserPacketThp} / \text{pmSamplesActDlRlcUserPacketThp})$

p_ActUlRlcTotPacketThp

Average value of UL RLC throughput measurements, including user data, retransmissions, padding bits, data PDU headers and RLC control PDU

Calculation

$100.0 * (\text{pmSumActUlRlcTotPacketThp} / \text{pmSamplesActUlRlcTotPacketThp})$

p_ActUlRlcUserPacketThp

Average value of UL RLC throughput including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU

Calculation

$100.0 * (\text{pmSumActUlRlcUserPacketThp} / \text{pmSamplesActUlRlcUserPacketThp})$

PAYLOAD_CS_DL_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched RABs after macro diversity splitting

Calculation

```
vsum(pmDlTrafficVolumeCs12, pmDlTrafficVolumeCs57, pmDlTrafficVolumeCs64,  
pmDlTrafficVolumeCs12Ps0) / (8.0 * 1024.0)
```

PAYLOAD_CS_UL_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched RABs before macro diversity combining

Calculation

```
vsum(pmUlTrafficVolumeCs12, pmUlTrafficVolumeCs57, pmUlTrafficVolumeCs64,  
pmUlTrafficVolumeCs12Ps0) / (8.0 * 1024.0)
```

PAYLOAD_PS_DL_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched RABs after macro diversity splitting

Calculation

```
vsum(pmDlTrafficVolumeCs12Ps64, pmDlTrafficVolumePsCommon,  
pmDlTrafficVolumePs64, pmDlTrafficVolumePs128, pmDlTrafficVolumePs384) /  
(8.0 * 1024.0)
```

PAYLOAD_PS_UL_MB

Payload traffic on uplink in megabyte (MB) for all RABs before macro diversity combining

Calculation

```
vsum(pmUlTrafficVolumeCs12Ps64, pmUlTrafficVolumePsCommon,  
pmUlTrafficVolumePs64, pmUlTrafficVolumePs128, pmUlTrafficVolumePs384) /  
(8.0 * 1024.0)
```

PAYLOAD_TOT_DL_MB

Payload traffic on downlink in megabyte (MB) for all RABs after macro diversity splitting

Calculation

```
vsum(pmDlTrafficVolumeCs12, pmDlTrafficVolumeCs57, pmDlTrafficVolumeCs64,  
pmDlTrafficVolumeCs12Ps0, pmDlTrafficVolumeCs12Ps64, pmDlTrafficVolumeP-  
sCommon, pmDlTrafficVolumePs64, pmDlTrafficVolumePs128,  
pmDlTrafficVolumePs384) / (8.0 * 1024.0)
```

PAYLOAD_TOT_UL_MB

Payload traffic on uplink in megabyte (MB) for all RABs before macro diversity combining

Calculation

```
vsum(pmUlTrafficVolumeCs12, pmUlTrafficVolumeCs57, pmUlTrafficVolumeCs64,  
pmUlTrafficVolumeCs12Ps0, pmUlTrafficVolumeCs12Ps64, pmUlTrafficVolumeP-
```

$$\frac{sCommon, pmUlTrafficVolumePs64, pmUlTrafficVolumePs128, pmUlTrafficVolumePs384}{(8.0 * 1024.0)}$$

pmAverageCompMode

Average number of compressed mode users, reported per cell

Calculation

$$pmSumCompMode * 100.0 / pmSamplesCompMode$$

pmDlRlcUserPacketThpP5MD_00

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $0 \leq x < 5$ kbps

Calculation

$$pmDlRlcUserPacketThp_0_5$$

pmDlRlcUserPacketThpP5MD_01

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $5 \leq x < 20$ kbps

Calculation

$$pmDlRlcUserPacketThp_5_20$$

pmDlRlcUserPacketThpP5MD_02

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $20 \leq x < 40$ kbps

Calculation

$$pmDlRlcUserPacketThp_20_40$$

pmDlRlcUserPacketThpP5MD_03

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $40 \leq x < 60$ kbps

Calculation

$$pmDlRlcUserPacketThp_40_60$$

pmDlRlcUserPacketThpP5MD_04

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $60 \leq x < 80$ kbps

Calculation

pmDlRlcUserPacketThp_60_80

pmDlRlcUserPacketThpP5MD_05

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $80 \leq x < 100$ kbps

Calculation

pmDlRlcUserPacketThp_80_100

pmDlRlcUserPacketThpP5MD_06

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $100 \leq x < 120$ kbps

Calculation

pmDlRlcUserPacketThp_100_120

pmDlRlcUserPacketThpP5MD_07

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $120 \leq x < 140$ kbps

Calculation

pmDlRlcUserPacketThp_120_140

pmDlRlcUserPacketThpP5MD_08

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $140 \leq x < 160$ kbps

Calculation

pmDlRlcUserPacketThp_140_160

pmDlRlcUserPacketThpP5MD_09

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $160 \leq x < 180$ kbps

Calculation

pmDlRlcUserPacketThp_160_180

pmDlRlcUserPacketThpP5MD_10

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $180 \leq x < 200$ kbps

Calculation

pmDlRlcUserPacketThp_180_200

pmDlRlcUserPacketThpP5MD_11

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $200 \leq x < 220$ kbps

Calculation

pmDlRlcUserPacketThp_200_220

pmDlRlcUserPacketThpP5MD_12

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $220 \leq x < 240$ kbps

Calculation

pmDlRlcUserPacketThp_220_240

pmDlRlcUserPacketThpP5MD_13

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $240 \leq x < 260$ kbps

Calculation

pmDlRlcUserPacketThp_240_260

pmDlRlcUserPacketThpP5MD_14

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $260 \leq x < 280$ kbps

Calculation

pmDlRlcUserPacketThp_260_280

pmDlRlcUserPacketThpP5MD_15

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $280 \leq x < 300$ kbps

Calculation

pmDlRlcUserPacketThp_280_300

pmDlRlcUserPacketThpP5MD_16

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $300 \leq x < 320$ kbps

Calculation

pmDlRlcUserPacketThp_300_320

pmDlRlcUserPacketThpP5MD_17

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $320 \leq x < 340$ kbps

Calculation

pmDlRlcUserPacketThp_320_340

pmDlRlcUserPacketThpP5MD_18

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $340 \leq x < 360$ kbps

Calculation

pmDlRlcUserPacketThp_340_360

pmDlRlcUserPacketThpP5MD_19

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $360 \leq x < 380$ kbps

Calculation

pmDlRlcUserPacketThp_360_380

pmDlRlcUserPacketThpP5MD_20

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $380 \leq x < 400$ kbps

Calculation

pmDlRlcUserPacketThp_380_400

pmDlRlcUserPacketThpP5MD_21

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $400 \leq x < 500$ kbps

Calculation

pmDlRlcUserPacketThp_400_500

pmDlRlcUserPacketThpP5MD_22

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $500 \leq x < 600$ kbps

Calculation

pmDlRlcUserPacketThp_500_600

pmDlRlcUserPacketThpP5MD_23

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $600 \leq x < 700$ kbps

Calculation

pmDlRlcUserPacketThp_600_700

pmDlRlcUserPacketThpP5MD_24

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $700 \leq x < 800$ kbps

Calculation

`pmDlRlcUserPacketThp_700_800`

pmDlRlcUserPacketThpP5MD_25

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $800 \leq x < 900$ kbps

Calculation

`pmDlRlcUserPacketThp_800_900`

pmDlRlcUserPacketThpP5MD_26

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $900 \leq x < 1000$ kbps

Calculation

`pmDlRlcUserPacketThp_900_1000`

pmDlRlcUserPacketThpP5MD_27

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1000 \leq x < 1250$ kbps

Calculation

`pmDlRlcUserPacketThp_1000_1250`

pmDlRlcUserPacketThpP5MD_28

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1250 \leq x < 1500$ kbps

Calculation

`pmDlRlcUserPacketThp_1250_1500`

pmDlRlcUserPacketThpP5MD_29

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1500 \leq x < 1750$ kbps

Calculation

`pmDlRlcUserPacketThp_1500_1750`

pmDlRlcUserPacketThpP5MD_30

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1750 \leq x < 2000$ kbps

Calculation

`pmDlRlcUserPacketThp_1750_2000`

pmDlRlcUserPacketThpP5MD_31

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $2000 \leq x < 2500$ kbps

Calculation

`pmDlRlcUserPacketThp_2000_2500`

pmDlRlcUserPacketThpP5MD_32

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $2500 \leq x < 3000$ kbps

Calculation

`pmDlRlcUserPacketThp_2500_3000`

pmDlRlcUserPacketThpP5MD_33

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $3000 \leq x < 4000$ kbps

Calculation

`pmDlRlcUserPacketThp_3000_4000`

pmDlRlcUserPacketThpP5MD_34

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range 4000<= x <5000kbps

Calculation

pmDlRlcUserPacketThp_4000_5000

pmDlTrafficVolumeCs12_MB

Payload traffic on downlink in megabyte (MB) for conversational/speech 12.2 kbps Circuit Switched RAB after macro diversity splitting

Calculation

pmDlTrafficVolumeCs12 / (8.0 * 1024.0)

pmDlTrafficVolumeCs12Ps0_MB

Payload traffic on DL in megabyte (MB) for speech 12.2 kbps CS and PS 0/0 kbps multi RAB after macro diversity splitting.

Calculation

pmDlTrafficVolumeCs12Ps0 / (8.0 * 1024.0)

pmDlTrafficVolumeCs12Ps64_MB

Payload traffic on DL in megabyte (MB) for speech 12.2 kbps CS and PS 64/64 kbps multi RAB after macro diversity splitting.

Calculation

pmDlTrafficVolumeCs12Ps64 / (8.0 * 1024.0)

pmDlTrafficVolumeCs57_MB

Payload traffic on downlink in megabyte (MB) for streaming 57.6 kbps Circuit Switched RAB after macro diversity splitting.

Calculation

pmDlTrafficVolumeCs57 / (8.0 * 1024.0)

pmDlTrafficVolumeCs64_MB

Payload traffic on downlink in megabyte (MB) for conversational 64 kbps Circuit Switched RAB after macro diversity splitting

Calculation

pmDlTrafficVolumeCs64 / (8.0 * 1024.0)

pmDlTrafficVolumePs128_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched 64/128 kbps RAB after macro diversity splitting.

Calculation

$$\text{pmDlTrafficVolumePs128} / (8.0 * 1024.0)$$

pmDlTrafficVolumePs384_MB

Payload traffic on downlink in megabyte (MB) for PS 64/384 RAB after macro diversity splitting.

Calculation

$$\text{pmDlTrafficVolumePs384} / (8.0 * 1024.0)$$

pmDlTrafficVolumePs64_MB

Payload traffic on downlink in megabyte (MB) for Packet Switched 64/64 kbps RAB after macro diversity splitting.

Calculation

$$\text{pmDlTrafficVolumePs64} / (8.0 * 1024.0)$$

pmDlTrafficVolumePsCommon_MB

Payload traffic on DL in megabyte (MB) for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Calculation

$$\text{pmDlTrafficVolumePsCommon} / (8.0 * 1024.0)$$

pmNoInCsIratHoSuccess_GsmRel

Number of successful CS incoming Inter System Handovers for all GsmRelations on this cell

Calculation

$$\text{AGGR}(\text{GsmRelation}, \text{pmNoInCsIratHoSuccess})$$

pmNoOutIratCcAtt

Total number of the PS Inter-RATCC attempts on DCH

Calculation

$$\text{AGGR}(\text{GsmRelation}, \text{pmNoOutIratCcAtt})$$

pmNoOutIratCcReturnOldCh

Total number of the PS Inter-RATCC attempts for UE on DCH where the UE returns to old channel

Calculation

`AGGR(GsmRelation, pmNoOutIratCcReturnOldCh)`

pmNoOutIratHoAtt

Number of CS Inter RAT Handover attempts to GSM

Calculation

`AGGR(GsmRelation, pmNoOutIratHoAtt)`

pmNoOutIratHoResourceAllocFail

Number of CS Inter RAT HO attempts to GSM where the UE returns to old ch due to congestion in GSM or no answer from CN

Calculation

`AGGR(GsmRelation, pmNoOutIratHoResourceAllocFail)`

pmNoOutIratHoReturnOldChOther

Number of CS Inter RAT Handover attempts to GSM where the UE returns to old channel due to Unspecified and other

Calculation

`AGGR(GsmRelation, pmNoOutIratHoReturnOldChOther)`

pmNoOutIratHoReturnOldChPhyChFail

Number of CS Inter RAT Handover attempts to GSM where the UE returns to old channel due to Physical Channel Failure

Calculation

`AGGR(GsmRelation, pmNoOutIratHoReturnOldChPhyChFail)`

pmNoOutIratHoSuccess

Number of successful CS Inter RAT Handovers to GSM

Calculation

`AGGR(GsmRelation, pmNoOutIratHoSuccess)`

pmUIRlcUserPacketThpP5MD_00

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $0 \leq x < 5$ kbps

Calculation

pmUIRlcUserPacketThp_0_5

pmUIRlcUserPacketThpP5MD_01

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $5 \leq x < 20$ kbps

Calculation

pmUIRlcUserPacketThp_5_20

pmUIRlcUserPacketThpP5MD_02

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $20 \leq x < 40$ kbps

Calculation

pmUIRlcUserPacketThp_20_40

pmUIRlcUserPacketThpP5MD_03

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $40 \leq x < 60$ kbps

Calculation

pmUIRlcUserPacketThp_40_60

pmUIRlcUserPacketThpP5MD_04

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $60 \leq x < 80$ kbps

Calculation

pmUIRlcUserPacketThp_60_80

pmUlrIcUserPacketThpP5MD_05

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $80 \leq x < 100$ kbps

Calculation

pmUlrIcUserPacketThp_80_100

pmUlrIcUserPacketThpP5MD_06

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $100 \leq x < 120$ kbps

Calculation

pmUlrIcUserPacketThp_100_120

pmUlrIcUserPacketThpP5MD_07

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $120 \leq x < 140$ kbps

Calculation

pmUlrIcUserPacketThp_120_140

pmUlrIcUserPacketThpP5MD_08

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $140 \leq x < 160$ kbps

Calculation

pmUlrIcUserPacketThp_140_160

pmUlrIcUserPacketThpP5MD_09

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $160 \leq x < 180$ kbps

Calculation

pmUlrIcUserPacketThp_160_180

pmUlrIcUserPacketThpP5MD_10

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $180 \leq x < 200$ kbps

Calculation

pmUlrIcUserPacketThp_180_200

pmUlrIcUserPacketThpP5MD_11

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $200 \leq x < 220$ kbps

Calculation

pmUlrIcUserPacketThp_200_220

pmUlrIcUserPacketThpP5MD_12

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $220 \leq x < 240$ kbps

Calculation

pmUlrIcUserPacketThp_220_240

pmUlrIcUserPacketThpP5MD_13

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $240 \leq x < 260$ kbps

Calculation

pmUlrIcUserPacketThp_240_260

pmUlrIcUserPacketThpP5MD_14

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $260 \leq x < 280$ kbps

Calculation

pmUlrIcUserPacketThp_260_280

pmUIRlcUserPacketThpP5MD_15

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $280 \leq x < 300$ kbps

Calculation

pmUIRlcUserPacketThp_280_300

pmUIRlcUserPacketThpP5MD_16

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $300 \leq x < 320$ kbps

Calculation

pmUIRlcUserPacketThp_300_320

pmUIRlcUserPacketThpP5MD_17

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $320 \leq x < 340$ kbps

Calculation

pmUIRlcUserPacketThp_320_340

pmUIRlcUserPacketThpP5MD_18

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $340 \leq x < 360$ kbps

Calculation

pmUIRlcUserPacketThp_340_360

pmUITrafficVolumeCs12_MB

Payload traffic on uplink in megabyte (MB) for conversational/speech 12.2 kbps Circuit Switched RAB before macro diversity combining

Calculation

pmUITrafficVolumeCs12 / (8.0 * 1024.0)

pmUITrafficVolumeCs12Ps0_MB

Payload traffic on UL in megabyte (MB) for speech 12.2 kbps CS and PS 0/0 kbps multi RAB before macro diversity combining.

Calculation

$\text{pmUlTrafficVolumeCs12Ps0} / (8.0 * 1024.0)$

pmUlTrafficVolumeCs12Ps64_MB

Payload traffic on UL in megabyte (MB) for speech 12.2 kbps CS and PS 64/64 kbps multi RAB before macro diversity combining.

Calculation

$\text{pmUlTrafficVolumeCs12Ps64} / (8.0 * 1024.0)$

pmUlTrafficVolumeCs57_MB

Payload traffic on uplink in megabyte (MB) for streaming 57.6 kbps Circuit Switched RAB before macro diversity combining.

Calculation

$\text{pmUlTrafficVolumeCs57} / (8.0 * 1024.0)$

pmUlTrafficVolumeCs64_MB

Payload traffic on uplink in megabyte (MB) for conversational 64 kbps Circuit Switched RAB before macro diversity combining.

Calculation

$\text{pmUlTrafficVolumeCs64} / (8.0 * 1024.0)$

pmUlTrafficVolumePs128_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/128 kbps RAB before macro diversity combining

Calculation

$\text{pmUlTrafficVolumePs128} / (8.0 * 1024.0)$

pmUlTrafficVolumePs384_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/384 kbps RAB before macro diversity combining.

Calculation

$\text{pmUlTrafficVolumePs384} / (8.0 * 1024.0)$

pmUlTrafficVolumePs64_MB

Payload traffic on uplink in megabyte (MB) for Packet Switched 64/64 kbps RAB before macro diversity combining

Calculation

$\text{pmULTrafficVolumePs64} / (8.0 * 1024.0)$

pmULTrafficVolumePsCommon_MB

Payload traffic on UL in megabyte (MB) for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Calculation

$\text{pmULTrafficVolumePsCommon} / (8.0 * 1024.0)$

PS_interact_Accessibility_Grade_of_Service

The blocking rate for PS interactive calls per UtranCell due to admission based on downlink power, downlink channelization code, downlink Average Speech Equivalent (ASE)

Calculation

$100.0 * \text{pmNoOfNonHoReqDeniedInteractive} / \text{pmNoRabEstablishAttemptPacketInteractive}$

PS_interactive_Call_Completion_Rate

The call completion success rate per UtranCell for PS Interactive

Calculation

$\text{PS_Intreract_Accessibility} * (1 - \text{PS_interactive_Drop_Rate}) / 100.0$

PS_interactive_Drop_Rate

The drop rate per UtranCell for PS Interactive

Calculation

$(100.0 - \text{PS_Intreract_Accessibility}) * (\text{pmNoSystemRabReleasePacket} - \text{pmNoTpSwitchSp64Speech} - \text{pmChSwitchFachIdle}) / \text{vsum}(\text{pmNoNormalRabReleasePacket}, \text{pmNoSystemRabReleasePacket})$

PS_interactive_Retainability

The Retainability per UtranCell for PS Interactive

Calculation

$\text{PS_Intreract_Accessibility} * (\text{pmNoSystemRabReleasePacket} - \text{pmNoTpSwitchSp64Speech} - \text{pmChSwitchFachIdle}) / \text{vsum}(\text{pmNoNormalRabReleasePacket}, \text{pmNoSystemRabReleasePacket})$

PS_Intreract_Accessibility

Accessibility success rate per UtranCell for PS interactive

Calculation

```
100.0 * ( pmTotNoRrcConnectReqPsSucc * pmNoRabEstablishSuccessPacketInter-  
active ) / ( pmTotNoRrcConnectReqPs * pmNoRabEstablishSuccessPacketInterac-  
tive)
```

PS_Stream_Accessibility

Accessibility success rate per UtranCell for PS streaming

Calculation

```
100.0 * ( pmTotNoRrcConnectReqPsSucc * pmNoRabEstablishSuccessPacketStream  
) / ( pmTotNoRrcConnectReqPs * pmNoRabEstablishAttemptPacketStream )
```

PS_Stream_Call_Completion_Success_Rate

The call completion success rate per UtranCell for PS Streaming

Calculation

```
PS_Stream_Accessibility * ( 1 - PS_Stream_Drop_Rate ) / 100.0
```

PS_Stream_Drop_Rate

The drop rate per UtranCell for PS Streaming

Calculation

```
100.0 * pmNoSystemRabReleasePacketStream / vsum ( pmNoNormalRabReleasePack-  
etStream , pmNoSystemRabReleasePacketStream )
```

PS_Stream_Retainability

The Retainability per UtranCell for PS Streaming

Calculation

```
100.0 - ( 100.0 * pmNoSystemRabReleasePacketStream / vsum ( pmNoNormal-  
RabReleasePacketStream , pmNoSystemRabReleasePacketStream ) )
```

PS_Streaming_Accessibility_Grade_of_Service

The blocking rate for PS Streaming calls per UtranCell due to admission based on downlink power, downlink channelization code, downlink Average Speech Equivalent (ASE)

Calculation

```
100.0 * pmNoOfNonHoReqDeniedPsStreaming / pmNoRabEstablishAttemptPacket-  
Stream
```

RefReqAllFRate

Average percentage of admitted requests with priority F4 & F3 & F3 & F2 & F1 & F0 (Foreground) rejections

Calculation

```
vsum ( pmRefusedRequestsF0 ,pmRefusedRequestsF1, pmRefusedRequestsF2,  
pmRefusedRequestsF3, pmRefusedRequestsF4 ) * 100.0 / vsum (   
pmAdmittedRequestsF0, pmAdmittedRequestsF1, pmAdmittedRequestsF2,   
pmAdmittedRequestsF3, pmAdmittedRequestsF4 )
```

ReturningRrcConnRate

percentage of failure for load sharing when establishing an RRC connection

Calculation

```
pmNoOfReturningRrcConn * 100.0 / pmNoLoadSharingRrcConn
```

UtranCell Peg Counts

The following is a list of peg counts for the UtranCell entity.

accessClassNBarred

Indicates whether or not access class N is barred (N = 0 to 15). { long, Range = 0..65535, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

ActDIRlcTotPacketThp_Preloaded

Indication of Average value of DL RLC throughput. Preloaded calculation of (pmSumActDIRlcTotPacketThp / pmSamplesActDIRlcTotPacketThp)

Data Source

RNC

Source Section

UtranCell

ActDIRlcUserPacketThp_Preloaded

Indication of Average DL RLC User Precieved Throughout. Preloaded calculation of (pmSumActDIRlcUserPacketThp / pmSamplesActDIRlcUserPacketThp)

Data Source

RNC

Source Section

UtranCell

ActUIRlcTotPacketThp_Preloaded

Indication of Average value of UL RLC throughput. Preloaded calculation of
(pmSumActUIRlcTotPacketThp / pmSamplesActUIRlcTotPacketThp)

Data Source

RNC

Source Section

UtranCell

ActUIRlcUserPacketThp_Preloaded

Indication of Average UL RLC User Precieved Throughout. Preloaded calculation of
(pmSumActUIRlcUserPacketThp / pmSamplesActUIRlcUserPacketThp)

Data Source

RNC

Source Section

UtranCell

administrativeState

The administrative state of the channel. { string, Default= UNLOCKED }

Data Source

Bulk CM

Source Section

Fach

administrativeState_CM

The administrative state of the cell. { string, Default= LOCKED }

Data Source

Bulk CM

Source Section

UtranCell

administrativeState_CM_HSDPA

The administrative state of the HSDPA resources in the cell. { string, Default= LOCKED }

Data Source

Bulk CM

Source Section

HsdSCH

administrativeState_CM_PCH

The administrative state of the channel. { string, Default= UNLOCKED }

Data Source

Bulk CM

Source Section

PCH

aseDLAdm

Admission limit for admission on max capacity (ASE level) in DL. { long, Range = 0..500, Default=240 }

Data Source

Bulk CM

Source Section

UtranCell

aseULAdm

Admission limit for admission on ASE in UL. { long, Range = 0..500, Default=160 }

Data Source

Bulk CM

Source Section

UtranCell

aseUlAdmOffset

Relative admission limit for admission on ASE in UL. { long, Range = 0..500, Default=40 }

Data Source

Bulk CM

Source Section

UtranCell

availabilityStatus

The availability status of the FACH channel. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Fach

availabilityStatus_CM

The availability status of the cell. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

UtranCell

availabilityStatus_CM_HSDPA

The availability status of the HSDPA resources in the cell. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

HsdSCH

availabilityStatus_CM_PCH

The availability status of the Packet Data Router device. { long, Range = 0..2047, Default=0, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Pch

bchPower

BCH power is the power to be used for transmitting on the BCH, relative to the primaryCpichPower value.(Ref. 3GPP TS 25.433). { long, Range = -350..150, Default=-31 }

Data Source

Bulk CM

Source Field

un:bchPower

Source Section

UtranCell

beMarginAseDL

Relative admission limit for admission on ASE for non-guaranteed bitrate calls (traffic class 'background' or 'interactive') in DL. { long, Range = 0..500, Default=100 }

Data Source

Bulk CM

Source Section

UtranCell

beMarginAseUl

Relative admission limit for admission on ASE for non-guaranteed bitrate calls (traffic class 'background' or 'interactive') in UL. { long, Range = 0..500, Default=20 }

Data Source

Bulk CM

Source Section

UtranCell

beMarginDlCode

Admission margin for DL code utilization in DL (non-handover, non-compressed mode RLS only). { long, Range = 0..20, Default=2 }

Data Source

Bulk CM

Source Section

UtranCell

beMarginDlPwr

Admission margin for DL power usage (non-guaranteed requests) { long, Range = 0..100, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

cellReserved

Indicates if this cell shall be reserved for operator use. If it is reserved, there will be no service to the UEs. { string, Default= NOT_RESERVED }

Data Source

Bulk CM

Source Section

UtranCell

cId

Cell identity. Unique in the RNC. cId is the identifier of a cell in one RNC, and is used together with the RncFunction attribute rncId as cell id at system information broadcast. { long, Range = 0..65535, Default=Mandatory }

Data Source

Bulk CM

Source Field

un:cId

Source Section

UtranCell

compModeAdm

Admission limit for #RL in compressed mode in a cell. { long, Range = 0..128, Default=15 }

Data Source

Bulk CM

Source Section

UtranCell

congDlInterval

System constant. { long, Default=100 }

Data Source

Bulk CM

Source Section

UtranCell

congTimeOut

System constant. { long, Default=3000 }

Data Source

Bulk CM

Source Section

UtranCell

congUInterval

System constant. { long, Default=100 }

Data Source

Bulk CM

Source Section

UtranCell

coverageIndicator

Defines whether the coverage area of the source cell and the target cell are indicated to overlap approximately the same coverage area, or whether the coverage area of the target cell is indicated to cover the source cell or it is contained in the source { string, Default=OVERLAP }

Data Source

Bulk CM

Source Section

CoverageRelation

cqiFeedbackCycle

The duration of the CQI feedback cycle on HS-DPCCH. { long, Range = 0,2,4,8,10,20,40,80,160, Default=8 }

Data Source

Bulk CM

Source Section

Hdsch

CS_Speech_Usage_AA

Stored pCalc for CS_Speech_Erlang (Avg/Avg). The average speech traffic Erlang carried per UtranCell . This is best fitted with Erlang definition through hourly report which is the same as 4 consecutive 15 minutes periods.

Data Source

NodeB_RNC_RXI

Source Field

pmSumBestCs12Establish / pmSamplesBestCs12Establish

Source Section

UtranCell

CS_Speech_Usage_AS

Stored pCalc for CS_Speech_Erlang (Avg/Sum). The average speech traffic Erlang carried per UtranCell . This is best fitted with Erlang definition through hourly report which is the same as 4 consecutive 15 minutes periods.

Data Source

NodeB_RNC_RXI

Source Field

pmSumBestCs12Establish / pmSamplesBestCs12Establish

Source Section

UtranCell

CS_Speech_Usage_SS

Stored pCalc for CS_Speech_Erlang (Sum/Sum). The average speech traffic Erlang carried per UtranCell . This is best fitted with Erlang definition through hourly report which is the same as 4 consecutive 15 minutes periods.

Data Source

NodeB_RNC_RXI

Source Field

pmSumBestCs12Establish / pmSamplesBestCs12Establish

Source Section

UtranCell

deltaAck1

The power offset for acknowledgement messages on HS-DPCCH for UE Connections using one RLS. { long, Range = 0..8, Default=4 }

Data Source

Bulk CM

Source Section

HsdSCH

deltaAck2

The power offset for acknowledgement messages on HS-DPCCH for UE Connections using two or more RLSs. { long, Range = 0..8, Default=8 }

Data Source

Bulk CM

Source Section

HsdSCH

deltaCqi1

The power offset for CQI report messages on HS-DPCCH for UE Connections using one RLS. { long, Range = 0..8, Default=4 }

Data Source

Bulk CM

Source Section

HsdSCH

deltaCqi2

The power offset for CQI report messages on HS-DPCCH for UE Connections using two or more RLSs. { long, Range = 0..8, Default=8 }

Data Source

Bulk CM

Source Section

HsdSCH

deltaNack1

The power offset for non-acknowledgement messages on HS-DPCCH for UE Connections using one RLS. { long, Range = 0..8, Default=4 }

Data Source

Bulk CM

Source Section

HsdSCH

deltaNack2

The power offset for non-acknowledgement messages on HS-DPCCH for UE Connections using two or more RLSs. { long, Range = 0..8, Default=8 }

Data Source

Bulk CM

Source Section

HsdSCH

deviceIndId

Device individual identity. { string, Default= "", ReadOnly, NoNotification }

Data Source

Bulk CM

Source Section

Pch

directedRetryTarget

Reference to the ExternalGsmCell MO, containing the specification of this Load Sharing via Directed Retry target cell. { ExternalGsmCell, Default= empty }

Data Source

Bulk CM

Source Section

UtranCell

dlCodeAdm

Admission limit used for admission based on DL channelization code tree usage (percentage of the tree in use). { long, Range = 0..100, Default=70 }

Data Source

Bulk CM

Source Section

UtranCell

ER_CS_Speech_Average_ICABH_Hold_Time_Denominator

The denominator of a intermediate expression to calculat
ER_CS_Speech_Average_ICABH_Hold_Time with the preload formula
(pmSamplesBestCs12Establish*vsum(pmNoRabEstablishSuccessSpeech,UtranRelation.pmRI
AddSuccessBestCellSpeech))

Data Source

NodeB_RNC

Source Section

Diversity

ER_CS_Speech_Average_ICABH_Hold_Time_Numerator

The numerator of a intermediate expression to calculate
ER_CS_Speech_Average_ICABH_Hold_Time with the preload formula
(PERLENSEC*pmSumBestCs12Establish)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_1RL_in_ActiveSet_Numerator

The numerator of a intermediate expression to calculate
ER_Percentage_UEs_with_1RL_in_ActiveSet with the preload formula
(pmSumUesWith1Rls1RIInActSet / pmSamplesUesWith1Rls1RIInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_2RL_in_ActiveSet_Denominator

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_2RL_in_ActiveSet with the preload formula
(pmSumUesWith2Rls2RlInActSet/pmSamplesUesWith2Rls2RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_2RL_in_ActiveSet_Numerator

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_2RL_in_ActiveSet with the preload formula
(pmSumUesWith1Rls2RlInActSet/pmSamplesUesWith1Rls2RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_3RL_in_ActiveSet_Denominator

One of the denominator of a intermediate expression to calculate ER_Percentage_UEs_with_3RL_in_ActiveSet with the preload formula
(pmSumUesWith3Rls3RlInActSet/pmSamplesUesWith3Rls3RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_3RL_in_ActiveSet_Numerator1

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_3RL_in_ActiveSet with the preload formula
(pmSumUesWith1Rls3RlInActSet/pmSamplesUesWith1Rls3RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_3RL_in_ActiveSet_Numerator2

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_3RL_in_ActiveSet with the preload formula
(pmSumUesWith2Rls3RlInActSet/pmSamplesUesWith2Rls3RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_4RL_in_ActiveSet_Denominator

One of the denominator of a intermediate expression to calculate ER_Percentage_UEs_with_4RL_in_ActiveSet with the preload formula
(pmSumUesWith4Rls4RlInActSet/pmSamplesUesWith4Rls4RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_4RL_in_ActiveSet_Numerator1

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_4RL_in_ActiveSet with the preload formula
(pmSumUesWith2Rls4RlInActSet/pmSamplesUesWith2Rls4RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

ER_Percentage_UEs_with_4RL_in_ActiveSet_Numerator2

One of the two numerators of a intermediate expression to calculate ER_Percentage_UEs_with_4RL_in_ActiveSet with the preload formula
(pmSumUesWith3Rls4RlInActSet/pmSamplesUesWith3Rls4RlInActSet)

Data Source

NodeB_RNC

Source Section

Diversity

fach1RateMatchingAttrDI

System constant. { long, Default=220 }

Data Source

Bulk CM

Source Section

Fach

fach2RateMatchingAttrDI

System constant. { long, Default=130 }

Data Source

Bulk CM

Source Section

Fach

fachMeasOccaCycLenCoeff

Fach Measurement Occasion Cycle Length coefficient. A factor used when the UE performs inter-frequency and inter-system measurements. { long, Range = 0..12, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

fPwrDown

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

fPwrUp

System constant. { long, Default=20 }

Data Source

Bulk CM

Source Section

UtranCell

hardIfhoCorr

Correction factor to be used in the calculation of initial power for SRB in hard interfrequency handover situations. { long, Range = -5..15, Default=3 }

Data Source

Bulk CM

Source Section

UtranCell

hoType

Indicates whether GSM HO, IFHO or no handover shall be attempted when a handover from the current WCDMA frequency is triggered by the connection quality monitoring, indicating that the WCDMA quality is low. { string, Default= GSM_PREFERRED }

Data Source

Bulk CM

Source Section

UtranCell

hsdpaUsersAdm

Admission limit for the number of users assigned to the HS-PDSCH/HS-SCCH in the cell. The limit is only applicable to RAB setup of HSDPA. { long, Range = 0..1000, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

hsMeasurementPowerOffset

The Measurement power offset, also called gamma, sent to the UE and RBS via RRC and NBAP. Used to offset the CQI in order to utilize the whole CQI range. { long, Range = -60..130, Default=0 }

Data Source

Bulk CM

Source Section

HsdSCH

hsPathlossThreshold

Maximum pathloss allowed for Serving HS-DSCH cell selection to validate the target cell for selection. { long, Range = 15..170, Default=170 }

Data Source

Bulk CM

Source Section

CoverageRelation

iFCong

Threshold at which UL congestion is detected in the cell. { long, Range = 0..621, Default=621 }

Data Source

Bulk CM

Source Section

UtranCell

iFHyst

Hysteresis time setting for detection of congestion in the UL RTWP in a cell. { long, Range = 0..6000, Default=6000 }

Data Source

Bulk CM

Source Section

UtranCell

iFOffset

Offset that, together with parameter iFCong, determines the RTWP measurement level at which UL congestion is to be resolved. { long, Range = 0..621, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

individualOffset

Used in UE function event-reporting. This offset is added to the measured quantity before the UE evaluates if an event has occurred. { long, Range = -100..100, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

initialAckNackRepetitionFactor

The initial number of repetitions for ACK/NACK feedback transmissions on HS-DPCCH. { long, Range = 1..4, Default=1 }

Data Source

Bulk CM

Source Section

Hsdsc

initialCqiRepetitionFactor

The initial number of repetitions for CQI report messages on HS-DPCCH. { long, Range = 1..4, Default=1 }

Data Source

Bulk CM

Source Section

HsdSch

intCongFilter

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UtranCell

interFreqFddMeasIndicator

Inter-frequency FDD measurement indicator. { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

UtranCell

interPwrMax

Intermediate relative power for maximum power mapping. { long, Range = -350..150, Default=38 }

Data Source

Bulk CM

Source Section

UtranCell

interRate

Intermediate rate for maximum power mapping. { long, Range = 0..1600000, Default=7760 }

Data Source

Bulk CM

Source Section

UtranCell

lac

Location Area Code, LAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

un:lac

Source Section

UtranCell

loadSharingGsmFraction

Defines percentage of Speech calls that can be directed to GSM after the loadSharingGsmThreshold has been exceeded { long, Range = 0..100, Default=100 }

Data Source

Bulk CM

Source Section

UtranCell

loadSharingGsmThreshold

Defines percentage of the guaranteed non-handover admission limit (pwrAdm) above which Directed Retry should be invoked { long, Range = 0..100, Default=75 }

Data Source

Bulk CM

Source Section

UtranCell

loadSharingMargin

Offset added to the DL power of the cell at inter-frequency load sharing evaluation. { long, Range = 0..100, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

localCellId

Represents resources in the RBS that can be used for the configuration of a cell. Local Cell id is used to uniquely identify the set of resources defined in a Node B to support a cell (as defined by a Cid Ref. 3GPP TS 25.401). { long, Range = 0..268435455, Default=Mandatory }

Data Source

Bulk CM

Source Field

un:localCellId

Source Section

UtranCell

maxFach1Power

Maximum power, to be used for transmitting the first FACH channel, relative the primaryCpichPower value. { long, Range = -350..150, Default=18 }

Data Source

Bulk CM

Source Section

Fach

maxFach2Power

Maximum power, to be used for transmitting the second FACH channel, relative the primaryCpichPower value. { long, Range = -350..150, Default=15 }

Data Source

Bulk CM

Source Section

Fach

maximumTransmissionPower

The maximum transmission power of a cell, DL Power (Ref. 3GPP TS 25.433). { long, Range = 0..500, Default=400 }

Data Source

Bulk CM

Source Field

un:maximumTransmissionPower

Source Section

UtranCell

maxPwrMax

Maximum relative power for maximum power mapping. { long, Range = -350..150, Default=48 }

Data Source

Bulk CM

Source Section

UtranCell

maxRate

Maximum rate for maximum power mapping. { long, Range = 0..1600000, Default=40690 }

Data Source

Bulk CM

Source Section

UtranCell

maxTxPowerUI

The maximum UE transmission power on the RACH when accessing the system. Used in UE functions for cell selection/reselection in idle mode and connected mode. { long, Range = -50..33, Default=24 }

Data Source

Bulk CM

Source Section

UtranCell

minimumRate

Minimum rate for maximum power mapping. { long, Range = 0..1600000, Default=1590 }

Data Source

Bulk CM

Source Section

UtranCell

minPwrMax

Minimum relative power for maximum power mapping. { long, Range = -350..150, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

minPwrRI

Minimum power per RL. { long, Range = -350..150, Default=-150 }

Data Source

Bulk CM

Source Section

UtranCell

nInSyncInd

Number of frames to be considered for in-sync detection. { long, Range = 1..256, Default=3 }

Data Source

Bulk CM

Source Section

UtranCell

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

UtranCell

nOutSyncInd

Number of frames to be considered for out-of-sync detection. { long, Range = 1..256, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

numHsPdschCodes

Number of codes of SF=16 used for the HS-PDSCH. { long, Range = 1..5, Default=5 }

Data Source

Bulk CM

Source Section

HsdSch

operationalState

The operational state of the FACH channel. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Fach

operationalState_CM

The operational state of the cell. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

UtranCell

operationalState_CM_HSDPA

The operational state of the HSDPA resources in the cell. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

HsdSch

operationalState_CM_PCH

The operational state of the channel. { string, Default= ENABLED, ReadOnly, NonPersistent, }

Data Source

Bulk CM

Source Section

Pch

pchPower

Maximum power to be used for transmitting the PCH, relative to the primaryCpichPower value.
{ long, Range = -350..150, Default=-4 }

Data Source

Bulk CM

Source Section

Pch

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

UtranCell_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

perlensec

Source Section

UtranCell_WMGeneral

pichMode

System constant. { long, Default=18 }

Data Source

Bulk CM

Source Section

Pch

pichPower

PICH power is the power to be used for transmitting on the physical channel carrying the paging indicators, relative to the primaryCpichPower value. { long, Range = -10..5, Default=-7 }

Data Source

Bulk CM

Source Section

Pch

pmAttNonBlindInterFreqHoCsConversational_RUP

Number of attempted non-blind outgoing inter-frequency handovers for RAB = CS
Conversational except speech (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoCsConversational

Source Section

UtranRelation

pmAttNonBlindInterFreqHoCsSpeech12_RUP

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Conversational
speech (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoCsSpeech12

Source Section

UtranRelation

pmAttNonBlindInterFreqHoPsInteractiveGreater64_RUP

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Interactive greater than 64 kbps (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoPsInteractiveGreater64

Source Section

UtranRelation

pmAttNonBlindInterFreqHoPsInteractiveLess64_RUP

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Interactive less than or equal to 64 kbps (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoPsInteractiveLess64

Source Section

UtranRelation

pmAttNonBlindInterFreqHoStreamingOther_RUP

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Streaming (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoStreamingOther

Source Section

UtranRelation

pmCellDowntimeAuto

The length of time during which a cell is unavailable for service because, due to a fault, the system has set a cell or channel state to disabled

Data Source

NodeB_RNC_RXI

Source Field

pmCellDowntimeAuto

Source Section

UtranCell

pmCellDowntimeMan

The length of time during which a cell is unavailable for service because of administration state being set to manual lock

Data Source

NodeB_RNC_RXI

Source Field

pmCellDowntimeMan

Source Section

UtranCell

pmChSwitchAttemptFachUra

Number of channel downswitching attempts from CELL_FACH to URA_PCH.

Data Source

RNC

Source Field

pmChSwitchAttemptFachUra

Source Section

UtranCell

pmChSwitchAttemptUraFach

Number of transitions attempted URA_PCH ->Cell_FACH.

Data Source

RNC

Source Field

pmChSwitchAttemptUraFach

Source Section

UtranCell

pmChSwitchDch128Fach

(Retired on P6)Number of attempted channel switches from a RAB with 128 kbps data rate on DCH to common channel (Cell_FACH state)

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchDch128Fach

Source Section

UtranCell

pmChSwitchDch384Fach

(Retired on P6)Number of attempted channel switches from a RAB with 384 kbps data rate on DCH to common channel (Cell_FACH state)

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchDch384Fach

Source Section

UtranCell

pmChSwitchDch64Fach

(Retired on P6)Number of attempted channel switches from a RAB with 64 kbps data rate on DCH to common channel (Cell_FACH state)

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchDch64Fach

Source Section

UtranCell

pmChSwitchFachDch

(Retired on P6)Number of switch from Common to dedicated Channel (CELL_FACH to CELL_DCH state)

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchFachDch

Source Section

UtranCell

pmChSwitchFachIdle

Number of attempted switches from common channel to idle (Cell_FACH to idle, connection release)

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchFachIdle

Source Section

UtranCell

pmChSwitchP128P384

(Retired on P6)Number of attempted channel switches from PS128 kbps to PS384 kbps RAB, after admission and throughput based attempts

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchP128P384

Source Section

UtranCell

pmChSwitchP128P64

(Retired on P6)Number of attempted channel switches from a PS128 kbps to a PS64 kbps RAB, based on DL code power based measurements

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchP128P64

Source Section

UtranCell

pmChSwitchP384P128

(Retired on P6)Number of attempted channel switches from a PS384 kbps to a PS128 kbps RAB, based on DL code power based measurements

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchP384P128

Source Section

UtranCell

pmChSwitchP64P128

(Retired on P6)Number of attempted channel switches from a PS64 kbps to a PS128 kbps RAB, based on DL code power based measurements

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchP64P128

Source Section

UtranCell

pmChSwitchSp0Sp64

(Retired on P6)Number of attempted channel switches from multi-RAB speech12.2+PS0/0 to multi-RAB speech12.2+PS64/64

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchSp0Sp64

Source Section

UtranCell

pmChSwitchSp64Sp0

(Retired on P6)Number of attempted channel switches from multi-RAB speech12.2+PS64/64 to multi-RAB speech12.2+PS0/0

Data Source

NodeB_RNC_RXI

Source Field

pmChSwitchSp64Sp0

Source Section

UtranCell

pmChSwitchSuccFachUra

Number of successful channel downswitching attempts from CELL_FACH to URA_PCH

Data Source

RNC

Source Field

pmChSwitchSuccFachUra

Source Section

UtranCell

pmChSwitchSuccUraFach

Number of transitions succeeded URA_PCH ->Cell_FACH.

Data Source

RNC

Source Field

pmChSwitchSuccUraFach

Source Section

UtranCell

pmCmAttDIHls

Attempted Compressed Mode starts for downlink using Higher Layer Selection (HLS) method.

Data Source

NodeB_RNC_RXI

Source Field

pmCmAttDIHls

Source Section

UtranCell

pmCmAttDISf2

Attempted Compressed Mode starts for downlink using Lower Spreading Factor (SF/2) method.

Data Source

NodeB_RNC_RXI

Source Field

pmCmAttDISf2

Source Section

UtranCell

pmCmAttUIHls

Attempted Compressed Mode starts for uplink using Higher Layer Selection (HLS) method.

Data Source

NodeB_RNC_RXI

Source Field

pmCmAttUIHls

Source Section

UtranCell

pmCmAttUISf2

Attempted Compressed Mode starts for uplink using Lower Spreading Factor (SF/2) method.

Data Source

NodeB_RNC_RXI

Source Field

pmCmAttUISf2

Source Section

UtranCell

pmCmStop

Number of Succ CM stops counting the Number of Succ Compressed mode deactivations.

Data Source

NodeB_RNC_RXI

Source Field

pmCmStop

Source Section

UtranCell

pmCmSuccDIHls

Successful CM starts for DL by using HLS method

Data Source

NodeB_RNC_RXI

Source Field

pmCmSuccDIHls

Source Section

UtranCell

pmCmSuccDISf2

Successful CM starts for DL by using SF/2 method

Data Source

NodeB_RNC_RXI

Source Field

pmCmSuccDISf2

Source Section

UtranCell

pmCmSuccUIHls

Successful CM starts for UL by using HLS method

Data Source

NodeB_RNC_RXI

Source Field

pmCmSuccUIHIs

Source Section

UtranCell

pmCmSuccUISf2

Successful CM starts for UL by using SF/2 method

Data Source

NodeB_RNC_RXI

Source Field

pmCmSuccUISf2

Source Section

UtranCell

pmCnRabReleaseCs64

CS Video Drop rate - CN initiated abnormal releases. GPEH Event:
RANAP_Rab_Assignment_Request, Internal_System_Release, RANAP_Iu_Release_Request

Data Source

GPEH P5ED

Source Field

pmCnRabReleaseCs64

Source Section

UtranCell

pmCnRabReleaseCsSpeech

CS Speech Drop rate - CN initiated abnormal releases GPEH Event:
RANAP_Rab_Assignment_Request, Internal_System_Release, RANAP_Iu_Release_Request

Data Source

GPEH P5ED

Source Field

pmCnRabReleaseCsSpeech

Source Section

UtranCell

pmCnRabReleaseHs

HS Drop rate - CN initiated abnormal releases. GPEH Event:
RANAP_Rab_Assignment_Request, Internal_System_Release, RANAP_Iu_Release_Request

Data Source

GPEH P5ED

Source Field

pmCnRabReleaseHs

Source Section

UtranCell

pmCnRabReleasePacket

PS Drop rate - CN initiated abnormal releases. GPEH Event:
RANAP_Rab_Assignment_Request, Internal_System_Release, RANAP_Iu_Release_Request

Data Source

GPEH P5ED

Source Field

pmCnRabReleasePacket

Source Section

UtranCell

pmDchDIRlcUserPacketThp_00

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_01

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_02

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_03

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_04

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_05

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_06

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_07

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_08

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_09

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_10

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_11

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_12

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_13

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_14

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_15

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_16

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_17

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_18

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchDIRlcUserPacketThp_19

The R99 DL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchDIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_00

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_01

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_02

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_03

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_04

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_05

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_06

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_07

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_08

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_09

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_10

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_11

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_12

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_13

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_14

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_15

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_16

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_17

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_18

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDchUIRlcUserPacketThp_19

The R99 UL RLC throughput (user data), excluding retransmissions.

Data Source

RNC

Source Field

pmDchUIRlcUserPacketThp

Source Section

UtranCell

pmDiscRcLost

Release due to Radio Connection With UE Lost. Step counter when RANAP Iu Release Request is received and cause = Radio Connection With UE Lost.

Data Source

GPEH P4

Source Field

pmDiscRcLost

Source Section

UtranCell

pmDiscRelocOpt

Resource Optimisation Relocation. Step counter when RANAP Iu Release Request is received and cause = Resource Optimisation Relocation.

Data Source

GPEH P4

Source Field

pmDiscRelocOpt

Source Section

UtranCell

pmDiscRelocSucc

Successful Relocation. Step counter when RANAP Iu Release Request is received and cause = Successful Relocation.

Data Source

GPEH P4

Source Field

pmDiscRelocSucc

Source Section

UtranCell

pmDiscSigResFail

Release due to Signaling Transport Resource Failure Step counter when RANAP Iu Release Request is received and cause = Signaling Transport Resource Failure.

Data Source

GPEH P4

Source Field

pmDiscSigResFail

Source Section

UtranCell

pmDiscTRelocOverall

Trelocoverall Expiry. Step counter when RANAP Iu Release Request is received and cause = Trelocoverall Expiry.

Data Source

GPEH P4

Source Field

pmDiscTRelocOverall

Source Section

UtranCell

pmDiscUeInit

Release due to UE generated signalling connection release. Step counter when RANAP Iu Release Request is received and cause = Release due to UE generated signaling connection release.

Data Source

GPEH P4

Source Field

pmDiscUeInit

Source Section

UtranCell

pmDiscUnspecified

Release due to Unspecified Failure. Step counter when RANAP RAB Assignment Response is received and cause = Unspecified Failure.

Data Source

GPEH P4

Source Field

pmDiscUnspecified

Source Section

UtranCell

pmDiscUtran

Release due to UTRAN Generated Reason. Step counter when RANAP Iu Release Request is received and cause = Release due to UTRAN Generated Reason. For RAB Release, count once for each RAB that is to be released.

Data Source

GPEH P4

Source Field

pmDiscUtran

Source Section

UtranCell

pmDIRlcUserPacketThp_0_5

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [0..5) Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_100_120

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [100..120) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_1000_1250

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [1000..1250) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_120_140

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [120..140) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_1250_1500

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [1250..1500) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_140_160

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [140..160) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_1500_1750

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [1500..1750) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_160_180

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [160..180) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_1750_2000

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [1750..2000) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_180_200

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [180..200) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_20_40

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [20..40) in Kbits per second

Data Source

Measured 2 times/second duration. Stored in Kbits per second, with resolution and range defined as below: [0] : [0..5) [1] : [5..20) [2] : [20..40) [3] : [40..60) . . [20] : [380..400) [21] : [400..500) . . [26] : [900..1000) [27] : [1000..1250) [28] : [1

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_200_220

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [200..220) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_2000_2500

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [2000..2500) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_220_240

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [220..240) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_240_260

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [240..260) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_2500_3000

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [2500..3000) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_260_280

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [260..280) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_280_300

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [280..300) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_300_320

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [300..320) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_3000_4000

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [3000..4000) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_320_340

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [320..340) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_340_360

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [340..360) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_360_380

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [360..380) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_380_400

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [380..400) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_40_60

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [40..60) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_400_500

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [400..500) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_4000_5000

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [4000..5000) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_5_20

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [5..20) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_500_600

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [500..600) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_5000_more

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [5000..more) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_60_80

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [60..80) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_600_700

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [600..700) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_700_800

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [700..800) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_80_100

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [80..100) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_800_900

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [800..900) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThp_900_1000

(Retired on P6)The DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [900..1000) in Kbits per second

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThpP5MD_35

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $5000 \leq x < 6000$ kbps

Data Source

RNC

Source Field

pmDlRlcUserPacketThp

Source Section

UtranCell

pmDlRlcUserPacketThpP5MD_36

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $6000 \leq x < 7000$ kbps

Data Source

RNC

Source Field

pmDlRlcUserPacketThp

Source Section

UtranCell

pmDlRlcUserPacketThpP5MD_37

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $7000 \leq x < 8000$ kbps

Data Source

RNC

Source Field

pmDlRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThpP5MD_38

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $8000 \leq x < 10000$ kbps

Data Source

RNC

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThpP5MD_39

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $10000 \leq x < 12000$ kbps

Data Source

RNC

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDIRlcUserPacketThpP5MD_40

(Retired on P6)DL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $x \geq 12000$ kbps

Data Source

RNC

Source Field

pmDIRlcUserPacketThp

Source Section

UtranCell

pmDITrafficVolumeAmr4750

Payload traffic on DL in kbits for speech AMR4750 RAB after macro diversity.

Data Source

RNC

Source Field

pmDITrafficVolumeAmr4750

Source Section

UtranCell

pmDITrafficVolumeAmr5900

Payload traffic on DL in kbits for speech AMR5900 RAB after macro diversity.

Data Source

RNC

Source Field

pmDITrafficVolumeAmr5900

Source Section

UtranCell

pmDITrafficVolumeAmr7950

Payload traffic on DL in kbits for speech AMR7950 RAB after macro diversity.

Data Source

RNC

Source Field

pmDITrafficVolumeAmr7950

Source Section

UtranCell

pmDITrafficVolumeAmrWb

Payload traffic on Downlink in kb for conversational/speech AMR-WB RAB after macro diversity. Payload traffic includes user data, MAC and RLC header information, and retransmissions are also counted as part of the traffic volume.

Data Source

RNC

Source Field

pmDITrafficVolumeAmrWb

Source Section

UtranCell

pmDITrafficVolumeCs12

Payload traffic on downlink in kbits for conversational/speech 12.2 kbps Circuit Switched RAB after macro diversity

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumeCs12

Source Section

UtranCell

pmDITrafficVolumeCs12Ps0

Payload traffic on DL in kbits for speech 12.2 kbps CS and PS 0/0 kbps multi RAB after macro diversity. - Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumeCs12Ps0

Source Section

UtranCell

pmDITrafficVolumeCs12Ps64

Payload traffic on DL in kbits for speech 12.2 kbps CS and PS 64/64 kbps multi RAB after macro diversity.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumeCs12Ps64

Source Section

UtranCell

pmDITrafficVolumeCs57

Payload traffic on downlink in kbits for streaming 57.6 kbps Circuit Switched RAB after macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumeCs57

Source Section

UtranCell

pmDITrafficVolumeCs64

Payload traffic on downlink in kbits for conversational 64 kbps Circuit Switched RAB after macro diversity

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumeCs64

Source Section

UtranCell

pmDITrafficVolumeCs64Ps8

Payload traffic on Downlink in Kbits on Dedicated Channel.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmDITrafficVolumeCs64Ps8

Source Section

UtranCell

pmDITrafficVolumePs128

Payload traffic on downlink in kbits for Packet Switched 64/128 kbps RAB after macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumePs128

Source Section

UtranCell

pmDITrafficVolumePs16

Monitors the payload traffic, including retransmissions, on Downlink (DL) in Kb for Interactive PS 16 kbps (DCH/DCH) RAB after macro diversity. Payload includes user data, Medium Access Control (MAC), Radio Link Control (RLC) header information.

Data Source

RNC

Source Field

pmDITrafficVolumePs16

Source Section

UtranCell

pmDITrafficVolumePs384

Payload traffic on downlink in kbits for PS 64/384 RAB after macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumePs384

Source Section

UtranCell

pmDITrafficVolumePs64

Payload traffic on downlink in kbits for Packet Switched 64/64 kbps RAB after macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumePs64

Source Section

UtranCell

pmDITrafficVolumePs8

Payload traffic (kbits) in DL after macro diversity for UeRc configurations which carry an Interactive DL TrCH with a maximum bit rate equal to 8 kbit/s. Only the PS Interactive part of the traffic volume is measured.

Data Source

RNC

Source Field

pmDITrafficVolumePs8

Source Section

UtranCell

pmDITrafficVolumePsCommon

Payload traffic on DL in kbits for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumePsCommon

Source Section

UtranCell

pmDITrafficVolumePsIntHs

Payload traffic (kbits) in DL for UeRc configurations for HS-DSCH. Only Interact. PS traffic is included.

Data Source

RNC

Source Field

pmDITrafficVolumePsIntHs

Source Section

UtranCell

pmDITrafficVolumePsStr128

Payload traffic (kbits) in DL after macro diversity for UeRc configurations which carry a Streaming DL TrCH with a maximum bit rate equal to 128 kbit/s. Only the PS Streaming part of the traffic volume is measured.

Data Source

RNC

Source Field

pmDITrafficVolumePsStr128

Source Section

UtranCell

pmDITrafficVolumePsStr128Ps8

Payload traffic on UL in kbits for PS Streaming 16/128 + Packet8kbps RABs after macro diversity.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmDITrafficVolumePsStr128Ps8

Source Section

UtranCell

pmDITrafficVolumePsStr16

Payload traffic (kbits) in DL after macro diversity for UeRc configurations which carry a Streaming DL TrCH with a maximum bit rate equal to 16 kbit/s. Only the PS Streaming part of the traffic volume is measured.

Data Source

RNC

Source Field

pmDITrafficVolumePsStr16

Source Section

UtranCell

pmDITrafficVolumePsStr64

Payload traffic (kbits) in DL before macro diversity for UeRc configurations which carry a Streaming DL TrCH with a maximum bit rate equal to 64 kbit/s. Only the PS Streaming part of the traffic volume is measured.

Data Source

RNC

Source Field

pmDITrafficVolumePsStr64

Source Section

UtranCell

pmDITrafficVolumePsStr64Ps8

Payload traffic on DL in Kb for streaming 16/64 PS kbps and interactive/background 8/8 PS multi RAB after macrodiversity. Payload traffic includes user data, MAC and RLC header information, and retransmissions are also counted as part of the traffic volum- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmDITrafficVolumePsStr64Ps8

Source Section

UtranCell

pmDITrafficVolumePsStrHs

Payload traffic (kbits) in DL for UeRc configurations which carries an Streaming PS DL Trch on HS-DSCH. Only PS Streaming traffic is included.

Data Source

RNC

Source Field

pmDITrafficVolumePsStrHs

Source Section

UtranCell

pmDIUpswitchAttemptHigh

Number of attempted DL up-switches to bit-rates higher than 256 kbps (not including HS).

Data Source

RNC

Source Field

pmDIUpswitchAttemptHigh

Source Section

UtranCell

pmDIUpswitchAttemptHs

Number of DL upswitch attempts to any HS state.

Data Source

RNC

Source Field

pmDIUpswitchAttemptHs

Source Section

UtranCell

pmDIUpswitchAttemptLow

Number of attempted DL up-switches to bit-rates less than or equal to 64 kbps (not including up-switch to FACH from URA-PCH).

Data Source

RNC

Source Field

pmDIUpswitchAttemptLow

Source Section

UtranCell

pmDIUpswitchAttemptMedium

Number of attempted DL up-switches to bit-rates higher than 64 kbps and less than or equal to 256 kbps.

Data Source

RNC

Source Field

pmDIUpswitchAttemptMedium

Source Section

UtranCell

pmDIUpswitchSuccessHigh

Number of successful DL up-switches to bit-rates higher than 256 kbps (not including HS).

Data Source

RNC

Source Field

pmDIUpswitchSuccessHigh

Source Section

UtranCell

pmDIUpswitchSuccessHs

Number of successful DL upswitches to any HS state.

Data Source

RNC

Source Field

pmDIUpswitchSuccessHs

Source Section

UtranCell

pmDIUpswitchSuccessLow

Number of successful DL up-switches to bit-rates less than or equal to 64 kbps (not including up-switch to FACH from URA-PCH).

Data Source

RNC

Source Field

pmDIUpswitchSuccessLow

Source Section

UtranCell

pmDIUpswitchSuccessMedium

Number of successful DL up-switches to bit-rates higher than 64 kbps and less than or equal to 256 kbps.

Data Source

RNC

Source Field

pmDIUpswitchSuccessMedium

Source Section

UtranCell

pmDownSwitchAttempt

Number of channel downswitching attempts (UL or DL). The counter includes switches between dedicated channels as well as channel type switches (CELL_DCH to CELL_FACH and E-DCH/HSDPA to RACH/FACH).

Data Source

RNC

Source Field

pmDownSwitchAttempt

Source Section

UtranCell

pmDownSwitchSuccess

Number of successful channel downswitches (UL or DL). The counter includes switches between dedicated channels as well as channel type switches (CELL_DCH to CELL_FACH and E-DCH/HSDPA to RACH/FACH).

Data Source

RNC

Source Field

pmDownSwitchSuccess

Source Section

UtranCell

pmEnableEulHhoAttempt

Number of attempted Hard Handovers to a coverage-related E-DCH cell. The counter is stepped in the best cell in the Active Set when the transition is triggered. The best cell is the cell with the highest measured quality defined by parameter UeMeasControl::hsQualityEstimate.

Data Source

RNC

Source Field

pmEnableEulHhoAttempt

Source Section

UtranCell

pmEnableHsHhoAttempt

Number of attempts to do a Hard HO to a coverage related cell, with the purpose to enable the possibility to do a transition to a HS-DSCH connection. The counter is stepped in the best cell in the Active Set when the transition is triggered.

Data Source

RNC

Source Field

pmEnableHsHhoAttempt

Source Section

UtranCell

pmEnableHsHhoSuccess

Number of successful attempts to do a Hard HO to a coverage related cell, with the purpose to enable the possibility to do a transition to a HS-DSCH connection. The counter is stepped in the best cell in the Active Set when the transition is triggered.

Data Source

RNC

Source Field

pmEnableHsHhoSuccess

Source Section

UtranCell

pmEulDowntimeAuto

Time in seconds that the Eul service in the cell has been unavailable because the system has considered the cell as down e.g. at least one of the MOs Eul, Hsdsc, UtranCell, Pch, Rach or Fach has been disabled while all these MOs have been unlocked.

Data Source

RNC

Source Field

pmEulDowntimeAuto

Source Section

Eul

pmEulDowntimeMan

Time in seconds that the Eul service in the cell has been unavailable due to operator setting e.g. the operator has locked at least one of the MOs Eul, Hsdsc, UtranCell, Pch, Rach or Fach.

Data Source

RNC

Source Field

pmEulDowntimeMan

Source Section

Eul

pmEulHarqTransmTti10Failure

Number of events when HARQ failure is indicated for the PS interactive RB and the SRBs when TTI = 10. The data shall be associated with the serving EUL cell.

Data Source

RNC

Source Field

pmEulHarqTransmTti10Failure

Source Section

UtranCell

pmEulHarqTransmTti10PsInteractive_01

Number of HARQ transmissions attempted for the PS interactive RB when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=1$

Data Source

RNC

Source Field

pmEulHarqTransmTti10PsInteractive

Source Section

UtranCell

pmEulHarqTransmTti10PsInteractive_02

Number of HARQ transmissions attempted for the PS interactive RB when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=2$

Data Source

RNC

Source Field

pmEulHarqTransmTti10PsInteractive

Source Section

UtranCell

pmEulHarqTransmTti10PsInteractive_03

Number of HARQ transmissions attempted for the PS interactive RB when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=3$

Data Source

RNC

Source Field

pmEulHarqTransmTti10PsInteractive

Source Section

UtranCell

pmEulHarqTransmTti10PsInteractive_04

Number of HARQ transmissions attempted for the PS interactive RB when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x \geq 4$

Data Source

RNC

Source Field

pmEulHarqTransmTti10PsInteractive

Source Section

UtranCell

pmEulHarqTransmTti10Srb_01

Number of HARQ transmissions attempted for the SRB's when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=1$

Data Source

RNC

Source Field

pmEulHarqTransmTti10Srb

Source Section

UtranCell

pmEulHarqTransmTti10Srb_02

Number of HARQ transmissions attempted for the SRB's when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=2$

Data Source

RNC

Source Field

pmEulHarqTransmTti10Srb

Source Section

UtranCell

pmEulHarqTransmTti10Srb_03

Number of HARQ transmissions attempted for the SRB's when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x=3$

Data Source

RNC

Source Field

pmEulHarqTransmTti10Srb

Source Section

UtranCell

pmEulHarqTransmTti10Srb_04

Number of HARQ transmissions attempted for the SRB's when TTI = 10 ms. If the signalled number of HARQ retransmissions is 13, 14 or 15, the PDF counter shall not be incremented. The data is associated with the serving EUL cell. Number of samples with $x \geq 4$

Data Source

RNC

Source Field

pmEulHarqTransmTti10Srb

Source Section

UtranCell

pmEulMacesPduTti10DelivPsInteractive

Number of MAC-es PDUs, corresponding to the PS interactive RB, which are delivered to the disassembly entity in MAC-es when TTI = 10 ms. The data shall be associated with the serving EUL cell.

Data Source

RNC

Source Field

pmEulMacesPduTti10DelivPsInteractive

Source Section

UtranCell

pmEulMacesPduTti10DelivSrb

Number of MAC-es PDUs, corresponding to the SRBs, which are delivered to the disassembly entities in MAC-es when TTI = 10 ms. The data shall be associated with the serving EUL cell.

Data Source

RNC

Source Field

pmEulMacesPduTti10DelivSrb

Source Section

UtranCell

pmEulMacesPduTti10UndelivPsInteractive

Number of MAC-es PDUs, corresponding to the PS interactive RB, which are undeliverable by MAC-es re-ordering, when TTI = 10 ms. The counter shall be incremented for each MAC-es PDU, which cannot be delivered. Undeliverable MAC-es PDUs are those that have not been received at expiry of timer RncFunction.t1eTimerUITti10 and have a TSN smaller than the TSN that triggered the timer . The data shall be associated with the serving EUL cell.

Data Source

RNC

Source Field

pmEulMacesPduTti10UndelivPsInteractive

Source Section

UtranCell

pmEulMacesPduTti10UndelivSrb

Number of MAC-es PDUs, corresponding to the SRBs, which are undeliverable by MAC-es re-ordering when TTI = 10 ms. The counter shall be incremented for each MAC-es PDU, which cannot be delivered. Undeliverable MAC-es PDUs are those that have not been received at expiry of timer RncFunction.t1eTimerUITti10 and have a TSN smaller than the TSN that triggered the timer . The data shall be associated with the serving EUL cell.

Data Source

RNC

Source Field

pmEulMacesPduTti10UndelivSrb

Source Section

UtranCell

pmEulRlcUserPacketThp_00

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_01

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_02

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_03

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_04

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_05

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_06

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_07

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_08

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_09

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_10

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_11

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_12

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_13

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_14

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_15

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_16

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_17

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulRlcUserPacketThp_18

The EUL UL RLC throughput (user data), excluding retransmissions. Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmEulRlcUserPacketThp

Source Section

Eul

pmEulToDchAttempt

Number of attempted channel switches from E-DCH to a lower capability channel, i.e. DCH/HS-DSCH or DCH/DCH. The counter is stepped in the best cell in the Active Set when the transition is triggered.

Data Source

RNC

Source Field

pmEulToDchAttempt

Source Section

UtranCell

pmEulToDchSuccess

Number of successful channel switches from E-DCH to a lower capability channel, i.e. DCH/HS-DSCH or DCH/DCH. The counter is stepped in the best cell in the Active Set when the transition is concluded.

Data Source

RNC

Source Field

pmEulToDchSuccess

Source Section

UtranCell

pmFailedChSwitch

Number of failed channel switches CELL_FACH to CELL_DCH or CELL_DCH to CELL_FACH

Data Source

NodeB_RNC_RXI

Source Field

pmFailedChSwitch

Source Section

UtranCell

pmFailedDchChSwitch

(Retired on P6)Number of failed channel switches between DCHs

Data Source

NodeB_RNC_RXI

Source Field

pmFailedDchChSwitch

Source Section

UtranCell

pmFaultyTransportBlocksBcUl

Total number of faulty uplink DCH transport blocks before combining.

Data Source

NodeB_RNC_RXI

Source Field

pmFaultyTransportBlocksBcUl

Source Section

UtranCell

pmHsDIRlcUserPacketThp_00

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_01

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_02

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_03

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_04

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_05

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_06

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_07

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_08

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_09

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_10

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_11

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_12

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_13

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_14

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_15

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_16

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_17

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_18

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_19

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_20

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_21

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_22

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_23

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_24

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_25

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_26

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_27

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_28

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDIRlcUserPacketThp_29

The HS-DSCH DL RLC throughput (user data), excluding retransmissions. Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmHsDIRlcUserPacketThp

Source Section

HsdSCH

pmHsDowntimeAuto

Amount of time the HsdSCH service in the cell is unavailable due to that the system has considered the cell as down e.g. at least one of the MOs HsdSCH, UtranCell, Pch, Rach or Fach is disabled while all are unlocked.

Data Source

RNC

Source Field

pmHsDowntimeAuto

Source Section

HsdSCH

pmHsDowntimeMan

Amount of time the HsdSCH service in the cell is unavailable due to operation setting e.g. the operator has locked at least one of the MOs HsdSCH, UtranCell, Pch, Rach or Fach.

Data Source

RNC

Source Field

pmHsDowntimeMan

Source Section

HsdSCH

pmHsdSCHOverloadDetection

Counts the number of times HS-DSCH Overload Control is detected.

Data Source

RNC

Source Field

pmHsdSCHOverloadDetection

Source Section

UtranCell

pmHsToDchAttempt

Number of attempts to reconfigure a connection using a HS-DSCH to a DCH connection. The counter is stepped in the best cell in the Active Set when the transition is triggered.

Data Source

RNC

Source Field

pmHsToDchAttempt

Source Section

UtranCell

pmHsToDchSuccess

Number of successful reconfigurations of a connection using a HS-DSCH to a DCH connection.
The counter is stepped in the best cell in the Active Set when the transition is triggered.

Data Source

RNC

Source Field

pmHsToDchSuccess

Source Section

UtranCell

pmInactivityHsIdle

The number of signalling connection releases triggered for PS Interactive RAB mapped on HS-DSCH due to inactivity.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmInactivityHsIdle

Source Section

UtranCell

pmInactivityMultiPsInt

Number of released PS RAB due to inactivity of one or more PS interactive RABs in the multi PS interactive RB combination.

Data Source

RNC

Source Field

pmInactivityMultiPsInt

Source Section

UtranCell

pmInactivityPsStreamIdle

Number UTRAN initiated RAB releases due to user inactivity per best cell.

Data Source

RNC

Source Field

pmInactivityPsStreamIdle

Source Section

UtranCell

pmInterFreqMeasCmStart

Number of inter-frequency measurements started with compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmInterFreqMeasCmStart

Source Section

UtranCell

pmInterFreqMeasCmStop

Number of inter-frequency measurements stops with compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmInterFreqMeasCmStop

Source Section

UtranCell

pmInterFreqMeasNoCmStart

Number of inter-frequency measurements started without compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmInterFreqMeasNoCmStart

Source Section

UtranCell

pmInterFreqMeasNoCmStop

Number of inter-frequency measurements stops without compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmInterFreqMeasNoCmStop

Source Section

UtranCell

pmIratHoGsmMeasCmStart

GSM measurement start with compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmIratHoGsmMeasCmStart

Source Section

UtranCell

pmIratHoGsmMeasNoCmStart

GSM measurement starts (without use of compressed mode)

Data Source

NodeB_RNC_RXI

Source Field

pmIratHoGsmMeasNoCmStart

Source Section

UtranCell

pmNoAttOutIratHoCs57_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'streaming 57.6 kbps CS RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoAttOutIratHoCs57

Source Section

GsmRelation

pmNoAttOutIratHoMulti_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'multi RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoAttOutIratHoMulti

Source Section

GsmRelation

pmNoAttOutIratHoSpeech_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'Conversational speech RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoAttOutIratHoSpeech

Source Section

GsmRelation

pmNoAttOutIratHoStandalone_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'Standalone signalling connection' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoAttOutIratHoStandalone

Source Section

GsmRelation

pmNoAttOutSbHoSpeech_RUP

Number of attempted outgoing Service Based GSM Handover for 'Conversational speech RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoAttOutSbHoSpeech

Source Section

GsmRelation_to_UtranCell

pmNoCellDchDisconnectAbnorm

Number of abnormal disconnections from dedicated channels that is CELL_DCH state

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellDchDisconnectAbnorm

Source Section

UtranCell

pmNoCellDchDisconnectNormal

Number of normal disconnections from dedicated channels that is CELL_DCH state.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellDchDisconnectNormal

Source Section

UtranCell

pmNoCellFachDisconnectAbnorm

Number of abnormal disconnections from common channels that is CELL_FACH state.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellFachDisconnectAbnorm

Source Section

UtranCell

pmNoCellFachDisconnectNormal

Number of normal disconnections from common channels that is CELL_FACH state.

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellFachDisconnectNormal

Source Section

UtranCell

pmNoCellUpdAttempt

Total Number of attempted cell update procedures (periodic and cell reselection).

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellUpdAttempt

Source Section

UtranCell

pmNoCellUpdSuccess

Total number of successful cell updates (periodic and cell reselection).

Data Source

NodeB_RNC_RXI

Source Field

pmNoCellUpdSuccess

Source Section

UtranCell

pmNoCs64DchDiscAbnorm

Number of abnormal disconnects of a conversational 64 kbps call for the best cell in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmNoCs64DchDiscAbnorm

Source Section

UtranCell

pmNoCs64DchDiscNormal

Number of normal disconnects of a conversational 64 kbps call for the best cell in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmNoCs64DchDiscNormal

Source Section

UtranCell

pmNoCsStreamDchDiscAbnorm

Number of abnormal disconnects of a streaming 57.6 kbps call for the best cell in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmNoCsStreamDchDiscAbnorm

Source Section

UtranCell

pmNoCsStreamDchDiscNormal

Number of normal disconnects of a streaming 57.6 kbps call for the best cell in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmNoCsStreamDchDiscNormal

Source Section

UtranCell

pmNoDirRetryAtt

Number of attempted outgoing inter RAT handover to GSM due to capacity reasons.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDirRetryAtt

Source Section

UtranCell

pmNoDirRetrySuccess

Number of successful outgoing inter RAT handover to GSM due to capacity reasons.

Data Source

NodeB_RNC_RXI

Source Field

pmNoDirRetrySuccess

Source Section

UtranCell

pmNoDiscardSduDtchHs

The total number of discarded Packet Interactive HS DTCH RLC SDUs.

Data Source

RNC

Source Field

pmNoDiscardSduDtchHs

Source Section

HsdSch

pmNoDiscardSduDtchHsPsStream

Total number of discarded SDUs on a HS DTCH for a PS Streaming RB.

Data Source

RNC

Source Field

pmNoDiscardSduDtchHsPsStream

Source Section

UtranCell

pmNoDIChCodeAllocAltCodeCm

Number of allocations with alternative scrambling code for compressed mode

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAltCodeCm

Source Section

UtranCell

pmNoDIChCodeAllocAttemptCm

Number of attempted DL channelization code allocations for compressed mode (within norm or alt scrambling code)

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptCm

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf128

Number attempted DL Chanization code alloc spread factor 128 normal trans mode.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf128

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf16

Number of attempted DL channelization code allocations for 16 and normal transmission mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf16

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf256

Number attempted DL Chanization code alloc spreading factor 256 normal trans mode.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf256

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf32

Number attempted DL Chanization code alloc spreading factor 32 normal trans mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf32

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf64

Number of attempted DL channelization code allocations for spreading factor 64 and normal transmission mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf64

Source Section

UtranCell

pmNoDIChCodeAllocAttemptSf8

Number of attempted DL Chanization code alloc spreading factor 8 normal trans mode.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocAttemptSf8

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf128

Number fail DL Chaniza code alloc attem for spread factor 128 normal trans mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf128

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf16

Number of failed DL channelization code allocation attempts for spreading factor 16 and normal transmission mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf16

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf256

Number fail DL Chanization code alloca attem spread factor spreading factor 256 normal trans mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf256

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf32

Number fail DL Chanization code alloc attem spread factor 32 normal trans mode.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf32

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf64

Number of failed DL channelization code allocation attempts for spreading factor 64 and normal transmission mode- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf64

Source Section

UtranCell

pmNoDIChCodeAllocFailureSf8

Number fail DL Chanization code alloc attem spread factor 8 normal trans mode.- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmNoDIChCodeAllocFailureSf8

Source Section

UtranCell

pmNoDscSduDtchDIPsStream

Total number of discarded SDUs on a DTCH in the downlink direction for a PS Streaming RB. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmNoDiscardSduDtchDIPsStreaming

Source Section

UtranCell

pmNoEulCcAttempt

Number of attempted Serving E-DCH Cell Changes. The counter is incremented in the target cell.

Data Source

RNC

Source Field

pmNoEulCcAttempt

Source Section

UtranCell

pmNoEulCcSuccess

Number of successful Serving E-DCH Cell Changes. The counter is incremented in the target cell.

Data Source

RNC

Source Field

pmNoEulCcSuccess

Source Section

UtranCell

pmNoEulHardHoReturnOldChSource

Number of failed Hard HO for serving E-DCH cell selection and UE maintained. The counter is stepped in the best cell in the Active Set when the transition is triggered. The best cell is the cell with the highest measured quality defined by parameter UeMeasControl::hsQualityEstimate.

Data Source

RNC

Source Field

pmNoEulHardHoReturnOldChSource

Source Section

UtranCell

pmNoEulHardHoReturnOldChTarget

Number of failed Hard HO for serving E-DCH cell selection and UE maintained. The counter is stepped in the target cell

Data Source

RNC

Source Field

pmNoEulHardHoReturnOldChTarget

Source Section

UtranCell

pmNoFailedAfterAdm

Number of RRC estab req & RAB estab req fail after being adm both serv & drift UEs

Data Source

NodeB_RNC_RXI

Source Field

pmNoFailedAfterAdm

Source Section

UtranCell

pmNoFailedRabEstAttemptExceedConnLimit

Number of failed PS RAB establishment attempts due to exceeding the configured connection limit when allocating Spreading Factor ('SF Histogram' in Admission Reject signal)

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptExceedConnLimit

Source Section

UtranCell

pmNoFailedRabEstAttemptLackDLAse

Number of failed RAB establishment attempts due to lack of DL ASE

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackDLAse

Source Section

UtranCell

pmNoFailedRabEstAttemptLackDLChnlCode

Number of failed RAB establishment attempts due to lack of DL channelization codes

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackDLChnlCode

Source Section

UtranCell

pmNoFailedRabEstAttemptLackDIHw

Number of failed RAB establishment attempts due to lack of DL hardware resources.

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackDIHw

Source Section

UtranCell

pmNoFailedRabEstAttemptLackDIHwBest

Number of failed RAB establishment attempts due to lack of DL hardware resources, for the best cell in the active set.

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackDIHwBest

Source Section

UtranCell

pmNoFailedRabEstAttemptLackDIPwr

Number of failed RAB establishment attempts due to lack of DL power

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackDIPwr

Source Section

UtranCell

pmNoFailedRabEstAttemptLackUIAse

Number of failed RAB establishment attempts due to lack of UL Air interface Speech Equivalent(ASE)

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackUIAse

Source Section

UtranCell

pmNoFailedRabEstAttemptLackUIHw

Number of failed RAB establishment attempts due to lack of UL hardware resources.

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackUIHw

Source Section

UtranCell

pmNoFailedRabEstAttemptLackUIHwBest

Number of failed RAB establishment attempts due to lack of UL hardware resources, for the best cell in the active set.

Data Source

RNC

Source Field

pmNoFailedRabEstAttemptLackUIHwBest

Source Section

UtranCell

pmNoFailOutIratHoCs57GsmFailure_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'streaming 57.6 kbps CS RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoCs57GsmFailure

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoCs57ReturnOldChNotPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'streaming 57.6 kbps CS RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoCs57ReturnOldChNotPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoCs57ReturnOldChPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'streaming 57.6 kbps CS RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoCs57ReturnOldChPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoCs57UeRejection_RUP

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'streaming 57.6 kbps CS RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoCs57UeRejection

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoMultiGsmFailure_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'multi RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoMultiGsmFailure

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoMultiReturnOldChNotPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'multi RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoMultiReturnOldChNotPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoMultiReturnOldChPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'multi RAB' for the best cell in the active set. (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoMultiReturnOldChPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoMultiUeRejection_RUP

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'multi RAB' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoMultiUeRejection

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoSpeechGsmFailure_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'Conversational speech RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoSpeechGsmFailure

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoSpeechReturnOldChNotPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoSpeechReturnOldChNotPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoSpeechReturnOldChPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoSpeechReturnOldChPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoSpeechUeRejection_RUP

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'Conversational speech RAB' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoSpeechUeRejection

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoStandaloneGsmFailure_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to GSM resource allocation failure, for 'Standalone signalling connection' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoStandaloneGsmFailure

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail_RUP

Number of failed outgoing (to GSM) inter-RAT handover due to reasons other than physical channel failure, where the UE fails to return to the present Active Set for 'Standalone signalling connection' for the best cell in the active set.(roll up from GSMRelation entity) (roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoStandaloneReturnOldChNotPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutIratHoStandaloneUeRejection_RUP

Number of failed outgoing (to GSM) inter-RAT handover, rejected by UE, for 'Standalone signalling connection' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutIratHoStandaloneUeRejection

Source Section

GsmRelation_to_UtranCell

pmNoFailOutSbHoSpeechGsmFailure_RUP

Number of failed outgoing Service Based GSM Handover due to GSM resource allocation failure, for 'Conversational speech RAB' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutSbHoSpeechGsmFailure

Source Section

GsmRelation_to_UtranCell

pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail_RUP

Number of failed outgoing Service Based GSM Handover due to reasons other than physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutSbHoSpeechReturnOldChNotPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutSbHoSpeechReturnOldChPhyChFail_RUP

Number of failed outgoing Service Based GSM Handover due to physical channel failure, where the UE returns to the present Active Set for 'Conversational speech RAB' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutSbHoSpeechReturnOldChPhyChFail

Source Section

GsmRelation_to_UtranCell

pmNoFailOutSbHoSpeechUeRejection_RUP

Number of failed outgoing Service Based GSM Handover, rejected by UE, for 'Conversational speech RAB' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoFailOutSbHoSpeechUeRejection

Source Section

GsmRelation_to_UtranCell

pmNoHsCcAttempt

Number of attempted Serving HS-DSCH Cell change.

Data Source

RNC

Source Field

pmNoHsCcAttempt

Source Section

UtranCell

pmNoHsCcSuccess

Number of successful Serving HS-DSCH Cell change.

Data Source

RNC

Source Field

pmNoHsCcSuccess

Source Section

UtranCell

pmNoHsHardHoReturnOldChSource

Number of failed Hard HO for serving HS-DSCH cell selection and UE connection maintained.
Source cell

Data Source

RNC

Source Field

pmNoHsHardHoReturnOldChSource

Source Section

UtranCell

pmNoHsHardHoReturnOldChTarget

Number of failed Hard HO for serving HS-DSCH cell selection and UE connection maintained.
Target Cell

Data Source

RNC

Source Field

pmNoHsHardHoReturnOldChTarget

Source Section

UtranCell

pmNoIncomingEulHardHoAttempt

Number of attempted incoming Hard HO for serving E-DCH cell selection. The counter is stepped in the target cell.

Data Source

RNC

Source Field

pmNoIncomingEulHardHoAttempt

Source Section

UtranCell

pmNoIncomingEulHardHoSuccess

Number of successful incoming Hard HO for serving E-DCH cell selection. The counter is stepped in the target cell.

Data Source

RNC

Source Field

pmNoIncomingEulHardHoSuccess

Source Section

UtranCell

pmNoIncomingHsHardHoAttempt

Number of attempted Hard HO for serving HS-DSCH cell selection. Target cell

Data Source

RNC

Source Field

pmNoIncomingHsHardHoAttempt

Source Section

UtranCell

pmNoIncomingHsHardHoSuccess

Number of successful Hard HO for serving HS-DSCH cell selection. Target cell

Data Source

RNC

Source Field

pmNoIncomingHsHardHoSuccess

Source Section

UtranCell

pmNoIncomingPsStrHsHhoAtt

Number of attempted Hard HO for serving HS-DSCH cell selection for PS Streaming. Target cell.

Data Source

RNC

Source Field

pmNoIncomingPsStreamHsHhoAttempt

Source Section

UtranCell

pmNoIncomingPsStrHsHhoSucc

Number of successful Hard HO for serving HS-DSCH cell selection for PS Streaming. Target cell.

Data Source

RNC

Source Field

pmNoIncomingPsStreamHsHhoSuccess

Source Section

UtranCell

pmNoInCsIratHoAdmFail

Number of CS incoming Inter System Handovers that failes due to admission blocking in Utran.

Data Source

NodeB_RNC_RXI

Source Field

pmNoInCsIratHoAdmFail

Source Section

UtranCell

pmNoInCsIratHoAtt

Number attempted CS incoming Inter-System HO

Data Source

NodeB_RNC_RXI

Source Field

pmNoInCsIratHoAtt

Source Section

UtranCell

pmNoInCsIratHoSuccess

Number of successful CS incoming Inter-System handovers.

Data Source

NodeB_RNC_RXI

Source Field

pmNoInCsIratHoSuccess

Source Section

UtranCell

pmNoLoadSharingRrcConn

Number of Load Sharing diversions when establishing an RRC connection

Data Source

NodeB_RNC_RXI

Source Field

pmNoLoadSharingRrcConn

Source Section

UtranCell

pmNoLoadSharingRrcConnCs

Number of Conversational (originating and terminating) Load Sharing RRC Connection attempts.

Data Source

RNC

Source Field

pmNoLoadSharingRrcConnCs

Source Section

UtranCell

pmNoLoadSharingRrcConnPs

Number of Packet (originating and terminating) Load Sharing RRC Connection attempts.

Data Source

RNC

Source Field

pmNoLoadSharingRrcConnPs

Source Section

UtranCell

pmNoNonServingCellReqDeniedEul

Number of admission requests denied when requesting the cell as non-serving cell because the number of E-DCH users is above the admission threshold.

Data Source

RNC

Source Field

pmNoNonServingCellReqDeniedEul

Source Section

UtranCell

pmNoNormalRabReleaseAmrNb

Number of normal RAB releases (AMR NB) for the best cell in the Active Set.

Data Source

RNC

Source Field

pmNoNormalRabReleaseAmrNb

Source Section

UtranCell

pmNoNormalRabReleaseAmrWb

Total number of normal RAB releases for AMR WB. Counted only for the best cell in the Active set.

Data Source

RNC

Source Field

pmNoNormalRabReleaseAmrWb

Source Section

UtranCell

pmNoNormalRabReleaseCs64

Number of successful normal RAB releases (CS Conversational 64 kbps [UDI]) referred to the Best Cell in the Active Set.

pmNoNormalRabReleaseCsStream

Number of successful normal RAB releases (CS Streaming) referred to the Best Cell in the Active Set.

pmNoNormalRabReleasePacket

Number of successful normal RAB releases (PS Data) for the best cell in Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoNormalRabReleasePacket

Source Section

UtranCell

pmNoNormalRabReleasePacketStream

Number of successful normal RAB releases (PS Streaming) referred to the best Cell in the Active Set.

pmNoNormalRabReleasePacketStream128

Number of successful normal RAB releases (PS Streaming 128) referred to the Best Cell in the Active Set.

Data Source

RNC

Source Field

pmNoNormalRabReleasePacketStream128

Source Section

UtranCell

pmNoNormalRabReleasePacketUra

Number of normal RAB Release of Packet RAB while on URA_PCH.

Data Source

RNC

Source Field

pmNoNormalRabReleasePacketUra

Source Section

UtranCell

pmNoNormalRabReleasePsStreamHs

Number of successful normal RAB releases for RAB-type streaming PS unknown HS, counted on the best cell in the Active Set (if in SRNC).

Data Source

RNC

Source Field

pmNoNormalRabReleasePsStreamHs

Source Section

UtranCell

pmNoNormalRabReleaseSpeech

Number of successful normal RAB releases (Speech) for the best cell in Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoNormalRabReleaseSpeech

Source Section

UtranCell

pmNoNormalRbReleaseEul

Number of normal RAB releases for PS Interactive RAB mapped on E-DCH/ HSDPA.

Data Source

RNC

Source Field

pmNoNormalRbReleaseEul

Source Section

UtranCell

pmNoNormalRbReleaseHs

The number of releases of packet RABs mapped on HS-DSCH in the Serving HS-DSCH cell with cause "Normal Release", "Successful Relocation", or "Resource Optimisation Relocation" indicated by the CN.

Data Source

RNC

Source Field

pmNoNormalRbReleaseHs

Source Section

UtranCell

pmNoOfIurSwDownNgCong

Number of non-guaranteed users served by another RNC terminated due to congestion.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIurSwDownNgCong

Source Section

UtranCell

pmNoOfIurTermCsCong

Number of Circuit Switched radio conn served by another RNC terminated due to cong.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIurTermCsCong

Source Section

UtranCell

pmNoOfIurTermHsCong

Number of HSDPA Radio Connections served over Iur terminated due to congestion.

Data Source

RNC

Source Field

pmNoOfIurTermHsCong

Source Section

UtranCell

pmNoOfIurTermSpeechCong

Number of speech radio connections served by another RNC terminated due to cong.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfIurTermSpeechCong

Source Section

UtranCell

pmNoOfNonHoReqDeniedCs

Number of non-handover admission requests denied for RLCs carrying CS data or CS streaming (57.6) per cell.

pmNoOfNonHoReqDeniedEul

Number of admission requests denied at RAB establishment on E-DCH.

Data Source

RNC

Source Field

pmNoOfNonHoReqDeniedEul

Source Section

UtranCell

pmNoOfNonHoReqDeniedHs

Number of non-handover admission requests denied for RLs carrying HSDPA users in this cell.

Data Source

RNC

Source Field

pmNoOfNonHoReqDeniedHs

Source Section

UtranCell

pmNoOfNonHoReqDeniedInteractive

Number of non-handover admission requests denied for RLs carrying interactive or background services per cell.

pmNoOfNonHoReqDeniedPsStr128

Number of non-handover admission requests denied for RLs carrying PS streaming 128 in this cell.

Data Source

RNC

Source Field

pmNoOfNonHoReqDeniedPsStr128

Source Section

UtranCell

pmNoOfNonHoReqDeniedPsStreaming

Number of non-handover admission requests denied for RLs carrying PS Streaming services per cell.

pmNoOfNonHoReqDeniedSpeech

Number of non-handover admission requests denied for RLs carrying speech per cell.

pmNoOfReturningEmergencyCalls

Number of Emergency Call diversions failing on GSM and returning and establishing an RRC connection

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReturningEmergencyCalls

Source Section

UtranCell

pmNoOfReturningRrcConn

Number of Load Sharing diversions when establishing an RRC connection that returns to the first frequency

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfReturningRrcConn

Source Section

UtranCell

pmNoOfRlForDriftingUes

Current number of RLs assigned in this cell for UEs that are served by another RNC

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRlForDriftingUes

Source Section

UtranCell

pmNoOfRlForNonDriftingUes

Current number of RLs assigned in this cell for UEs that are served by this RNC

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfRlForNonDriftingUes

Source Section

UtranCell

pmNoOfSampAseDl

Number of samples of ASE downlink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSampAseDl

Source Section

UtranCell

pmNoOfSampAseUl

Number of samples of ASE Uplink.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSampAseUl

Source Section

UtranCell

pmNoOfSwDownEulCong

Number of E-DCH users served by this RNC, which are down-switched due to DL congestion in both EUL serving cell and EUL non-serving cell.

Data Source

RNC

Source Field

pmNoOfSwDownEulCong

Source Section

UtranCell

pmNoOfSwDownHsCong

Number of Radio Connections served by this RNC, including an HSDPA service, which are channel switched down due to a congestion resolve action initiated on a serving Ue Context.

Data Source

RNC

Source Field

pmNoOfSwDownHsCong

Source Section

UtranCell

pmNoOfSwDownNgAdm

Number of downswitch requests for non-guaranteed users served by this RNC due to admission

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSwDownNgAdm

Source Section

UtranCell

pmNoOfSwDownNgCong

Number of non-guarant users serv by this RNC switch down to common Chan due to cong

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSwDownNgCong

Source Section

UtranCell

pmNoOfSwDownNgHo

Number of downswitch requests for non-guaranteed users served by this RNC due to handover

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfSwDownNgHo

Source Section

UtranCell

pmNoOfTermCsCong

Number of Circuit Switched radio conn served by this RNC terminated due to cong.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfTermCsCong

Source Section

UtranCell

pmNoOfTermHsCong

Number of HSDPA Radio Connections served by this RNC terminated due to congestion.-
Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmNoOfTermHsCong

Source Section

UtranCell

pmNoOfTermSpeechCong

Number of speech radio connections served by this RNC terminated due to congestion.

Data Source

NodeB_RNC_RXI

Source Field

pmNoOfTermSpeechCong

Source Section

UtranCell

pmNoOutgoingEulHardHoAttempt

Number of attempted outgoing Hard HO for serving E-DCH cell selection. The counter is stepped in the best cell in the Active Set when the transition is triggered. The best cell is the cell with the highest measured quality defined by parameter UeMeasControl::hsQualityEstimate

Data Source

RNC

Source Field

pmNoOutgoingEulHardHoAttempt

Source Section

UtranCell

pmNoOutgoingEulHardHoSuccess

Number of successful outgoing Hard HO for serving E-DCH cell selection. The counter is stepped in the best cell in the Active Set when the transition is triggered. The best cell is the cell with the highest measured quality defined by parameter UeMeasControl::hsQualityEstimate

Data Source

RNC

Source Field

pmNoOutgoingEulHardHoSuccess

Source Section

UtranCell

pmNoOutgoingHsHardHoAttempt

Number of successful Hard HO for serving HS-DSCH cell selection. Source cell

Data Source

RNC

Source Field

pmNoOutgoingHsHardHoAttempt

Source Section

UtranCell

pmNoOutgoingHsHardHoSuccess

Number of successful Hard HO for serving HS-DSCH cell selection. Source cell

Data Source

RNC

Source Field

pmNoOutgoingHsHardHoSuccess

Source Section

UtranCell

pmNoOutgPsStreHsHhoAtt

Number of attempts Hard HO for serving HS-DSCH cell selection for PS Streaming. Source cell.

Data Source

RNC

Source Field

pmNoOutgoingPsStreamHsHhoAttempt

Source Section

UtranCell

pmNoOutgPsStrHsHhoSucc

Number of successful Hard HO for serving HS-DSCH cell selection for PS Streaming. Source cell.

Data Source

RNC

Source Field

pmNoOutgoingPsStreamHsHhoSuccess

Source Section

UtranCell

pmNoOutIratCcAtt_RUP

Total number of the PS Inter-RATCC attempts on DCH (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOutIratCcAtt

Source Section

GsmRelation

pmNoOutIratCcReturnOldCh_RUP

Total number of the PS Inter-RATCC attempts for UE on DCH where the UE returns to old channel (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoOutIratCcReturnOldCh

Source Section

GsmRelation

pmNoOutIratCcSuccess_RUP

Number of successful PS Inter RAT cell change attempts for UE on dedicated channel. The counter is triggered by CN Iu Release Command following the sending of the CELL CHANGE ORDER FROM UTRAN message.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoOutIratCcSuccess

Source Section

GsmRelation_to_UtranCell

pmNoPacketDchDiscAbnorm

Number of abnormal disconnect of a packet call over DCH for the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoPacketDchDiscAbnorm

Source Section

UtranCell

pmNoPacketDchDiscNormal

Number of normal disconnect of a packet call over DCH for the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoPacketDchDiscNormal

Source Section

UtranCell

pmNoPagingAttemptCnInitDcch

Number of CN-initiated pages sent on DCCH to Connected mode UEs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoPagingAttemptCnInitDcch

Source Section

UtranCell

pmNoPagingAttemptUtranRejected

Number of page req rejected by WCDMA RAN. Inc both CN and WCDMA RAN init pagings.

Data Source

NodeB_RNC_RXI

Source Field

pmNoPagingAttemptUtranRejected

Source Section

UtranCell

pmNoPagingType1Attempt

Number of paging type 1 attempts to idle UEs in a cell (excluding retransmissions).

Data Source

RNC

Source Field

pmNoPagingType1Attempt

Source Section

UtranCell

pmNoPagingType1AttemptCs

Number of paging type 1 attempts with cause 'Terminating Conversational Call' to idle UEs in a cell (excluding retransmissions).

Data Source

RNC

Source Field

pmNoPagingType1AttemptCs

Source Section

UtranCell

pmNoPagingType1AttemptPs

Number of paging type 1 attempts with cause 'Terminating Interactive Call' or 'Terminating Background Call' to idle UEs in a cell (excluding retransmissions).

Data Source

RNC

Source Field

pmNoPagingType1AttemptPs

Source Section

UtranCell

pmNoPsStream128Ps8DchDiscAbnorm

Number of abnormal RRC disconnects of a PS Streaming 16/128 + Packet 8kbps connection for the best cell in the active set.

Data Source

RNC

Source Field

pmNoPsStream128Ps8DchDiscAbnorm

Source Section

UtranCell

pmNoPsStream128Ps8DchDiscNormal

Number of normal RRC disconnects of a PS Streaming 16/128 + Packet 8kbps connection for the best cell in the active set

Data Source

RNC

Source Field

pmNoPsStream128Ps8DchDiscNormal

Source Section

UtranCell

pmNoPsStream64Ps8DchDiscAbnorm

Number of abnormal disconnects of a PS streaming 64 kbps + PS 8kbps multiRAB for the best cell in the active set.

Data Source

NodeB_RNC_RXI

Source Field

pmNoPsStream64Ps8DchDiscAbnorm

Source Section

UtranCell

pmNoPsStream64Ps8DchDiscNormal

Number of normal disconnects of a PS streaming 64 kbps + PS 8kbps multiRAB for the best cell in the active set.

Data Source

NodeB_RNC_RXI

Source Field

pmNoPsStream64Ps8DchDiscNormal

Source Section

UtranCell

pmNoPsStreamHsCcAttempt

Number of HS cell change attempts for RAB type streaming PS (HS), counted on the HS-serving cell (if in the SRNC).

Data Source

RNC

Source Field

pmNoPsStreamHsCcAttempt

Source Section

UtranCell

pmNoPsStreamHsCcSuccess

Number of successful HS cell change attempts for RAB type streaming PS (HS), counted on the HS-serving cell (if in the SRNC).

Data Source

RNC

Source Field

pmNoPsStreamHsCcSuccess

Source Section

UtranCell

pmNoPsStrHsHhoRtnOldSource

Number of failed Hard HO for serving HS-DSCH cell selection and UE connection maintained for PS Streaming. Source cell.

Data Source

RNC

Source Field

pmNoPsStreamHsHhoReturnOldSource

Source Section

UtranCell

pmNoPsStrHsHhoRtnOldTarget

Number of failed Hard HO for serving HS-DSCH cell selection and UE connection maintained for PS Streaming. Target Cell.

Data Source

RNC

Source Field

pmNoPsStreamHsHhoReturnOldTarget

Source Section

UtranCell

pmNoRabEstablishAttemptAmrNb

Number of RAB establishment attempts (AMR NB) for the best cell in the Active Set.

Data Source

RNC

Source Field

pmNoRabEstablishAttemptAmrNb

Source Section

UtranCell

pmNoRabEstablishAttemptAmrWb

Total number of attempted RAB establishments for AMR WB. Counted only for the best cell in the Active set.

Data Source

RNC

Source Field

pmNoRabEstablishAttemptAmrWb

Source Section

UtranCell

pmNoRabEstablishAttemptCs57

Number of RAB establishments attempts (CS 57) referred to the Best Cell in the Active Set.

pmNoRabEstablishAttemptCs64

Number of RAB establishment attempts (CS 64) referred to the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishAttemptCs64

Source Section

UtranCell

pmNoRabEstablishAttemptPacketInteractive

Number of RAB establishments attempts (PS Data, Interactive) referred to the Best Cell in the Active Set.

pmNoRabEstablishAttemptPacketInteractiveHs

The number of attempted RAB establishments for PS Interactive RAB mapped on HS-DSCH.

Data Source

RNC

Source Field

pmNoRabEstablishAttemptPacketInteractiveHs

Source Section

UtranCell

pmNoRabEstablishAttemptPacketStream

Number of RAB establishments attempts (PS Streaming) referred to the Best Cell in the Active Set.

pmNoRabEstablishAttemptPacketStream128

Number of RAB establishment's attempts (PS Streaming 128) referred to the Best Cell in the Active Set.

Data Source

RNC

Source Field

pmNoRabEstablishAttemptPacketStream128

Source Section

UtranCell

pmNoRabEstablishAttemptSpeech

Number of RAB establishment attempts (Speech) referred to the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishAttemptSpeech

Source Section

UtranCell

pmNoRabEstablishSuccessAmrNb

Number of successful RAB establishments (AMR NB) for the best cell in the Active Set.

Data Source

RNC

Source Field

pmNoRabEstablishSuccessAmrNb

Source Section

UtranCell

pmNoRabEstablishSuccessAmrWb

Total number of successful RAB establishments for AMR WB. Counted only for the best cell in the Active set.

Data Source

RNC

Source Field

pmNoRabEstablishSuccessAmrWb

Source Section

UtranCell

pmNoRabEstablishSuccessCs57

Number of successful RAB establishments (CS 57) referred to the Best Cell in the Active Set.

pmNoRabEstablishSuccessCs64

Number of successful RAB establishments (CS 64) referred to the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishSuccessCs64

Source Section

UtranCell

pmNoRabEstablishSuccessPacketInteractive

Number of successful RAB establishments (PS Data, Interactive) referred to the Best Cell in the Active Set.

pmNoRabEstablishSuccessPacketInteractiveHs

The number of successful RAB establishments for PS Interactive RAB mapped on HS-DSCH.

Data Source

RNC

Source Field

pmNoRabEstablishSuccessPacketInteractiveHs

Source Section

UtranCell

pmNoRabEstablishSuccessPacketStream

Number of successful RAB establishments (PS Streaming) referred to the Best Cell in the Active Set.

pmNoRabEstablishSuccessPacketStream128

Number of successful RAB establishments (PS Streaming 128) referred to the Best Cell in the Active Set.

Data Source

RNC

Source Field

pmNoRabEstablishSuccessPacketStream128

Source Section

UtranCell

pmNoRabEstablishSuccessSpeech

Number of successful RAB establishments (Speech) referred to the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoRabEstablishSuccessSpeech

Source Section

UtranCell

pmNoRabEstAttemptPsStreamHs

Number of RAB establishment attempts for RAB type streaming PS (HS), counted on the HS-serving cell.

Data Source

RNC

Source Field

pmNoRabEstAttemptPsStreamHs

Source Section

UtranCell

pmNoRabEstAttPacketInteractiveEul

Number of attempted RAB establishments for PS Interactive RAB mapped on E-DCH/ HSDPA .

Data Source

RNC

Source Field

pmNoRabEstablishAttemptPacketInteractiveEul

Source Section

UtranCell

pmNoRabEstBkRnBtPsStrHs

Number of RAB establishment attempts for RAB-type streaming PS unknown HS that are blocked due to RN congestion or RN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockRnBestPsStreamHs

Source Section

UtranCell

pmNoRabEstBlkNPsIntNonHsBt

Number of RAB establishment attempts for RAB-type PS Interactive that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlkNodePsIntNonHsBest

Source Section

UtranCell

pmNoRabEstBlkNPsStrNonHsBt

Number of RAB establishment attempts for RAB-type PS Streaming that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlkNodePsStrNonHsBest

Source Section

UtranCell

pmNoRabEstBlkTnPsIntHsBt

Number of RAB establishment attempts for RAB-type PS Interactive for HS that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsIntHsBest

Source Section

UtranCell

pmNoRabEstBlkTnPsStrHsBt

Number of RAB establishment attempts for RAB-type PS Streaming for HS that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsStreamHsBest

Source Section

UtranCell

pmNoRabEstBlkTnPsStrNonHsBt

Number of RAB establishment attempts for RAB-type PS Streaming that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsStrNonHsBest

Source Section

UtranCell

pmNoRabEstBlockNodeCs57Best

Number of RAB establishment attempts for RAB-type CS57 that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockNodeCs57Best

Source Section

UtranCell

pmNoRabEstBlockNodeCs64Best

Number of RAB establishment attempts for RAB-type CS64 that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockNodeCs64Best

Source Section

UtranCell

pmNoRabEstBlockNodePsIntHsBest

Number of RAB establishment attempts for RAB-type PS Interactive for HS that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockNodePsIntHsBest

Source Section

UtranCell

pmNoRabEstBlockNodePsStrHsBest

Number of RAB establishment attempts for RAB-type PS Streaming for HS that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockNodePsStrHsBest

Source Section

UtranCell

pmNoRabEstBlockNodeSpeechBest

Number of RAB establishment attempts for RAB-type CS Speech that are blocked due to node congestion or node failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockNodeSpeechBest

Source Section

UtranCell

pmNoRabEstBlockRnPsStreamHs

Number of RAB establishment attempts for RAB-type streaming PS unknown HS that are blocked due to on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockRnPsStreamHs

Source Section

UtranCell

pmNoRabEstBlockTnCs57

Number of RAB establishment attempts for RAB-type CS57 that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnCs57

Source Section

UtranCell

pmNoRabEstBlockTnCs57Best

Number of RAB establishment attempts for RAB-type CS57 that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnCs57Best

Source Section

UtranCell

pmNoRabEstBlockTnCs64

Number of RAB establishment attempts for RAB-type CS64 that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnCs64

Source Section

UtranCell

pmNoRabEstBlockTnCs64Best

Number of RAB establishment attempts for RAB-type CS64 that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnCs64Best

Source Section

UtranCell

pmNoRabEstBlockTnPsIntHs

Number of RAB establishment attempts for RAB-type PS Interactive for HS that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsIntHs

Source Section

UtranCell

pmNoRabEstBlockTnPsIntNonHs

Number of RAB establishment attempts for RAB-type PS Interactive that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsIntNonHs

Source Section

UtranCell

pmNoRabEstBlockTnPsIntNonHsBest

Number of RAB establishment attempts for RAB-type PS Interactive that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsIntNonHsBest

Source Section

UtranCell

pmNoRabEstBlockTnPsStrHs

Number of RAB establishment attempts for RAB-type PS Streaming for HS that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsStrHs

Source Section

UtranCell

pmNoRabEstBlockTnPsStrNonHs

Number of RAB establishment attempts for RAB-type PS Streaming that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnPsStrNonHs

Source Section

UtranCell

pmNoRabEstBlockTnSpeech

Number of RAB establishment attempts for RAB-type Speech that are blocked due to TN congestion or TN failure, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnSpeech

Source Section

UtranCell

pmNoRabEstBlockTnSpeechBest

Number of RAB establishment attempts for RAB-type Speech that are blocked due to TN congestion or TN failure, counted on the best cell.

Data Source

RNC

Source Field

pmNoRabEstBlockTnSpeechBest

Source Section

UtranCell

pmNoRabEstSuccessPsStreamHs

Number of successful RAB establishment attempts for RAB type streaming PS (HS), counted on the HS-serving cell.

Data Source

RNC

Source Field

pmNoRabEstSuccessPsStreamHs

Source Section

UtranCell

pmNoRabEstSuccPacketInteractiveEul

The number of successful RAB establishments for PS Interactive RAB mapped on E-DCH/HSDPA

Data Source

RNC

Source Field

pmNoRabEstablishSuccessPacketInteractiveEul

Source Section

UtranCell

pmNoReceivedSduDtchHs

The total number of received Packet Interactive HS DTCH RLC SDUs.

Data Source

RNC

Source Field

pmNoReceivedSduDtchHs

Source Section

HsdSCH

pmNoReceivedSduDtchHsPsStream

Total number of received SDUs on a DTCH in the uplink direction for a PS Streaming RB.

Data Source

RNC

Source Field

pmNoReceivedSduDtchHsPsStream

Source Section

UtranCell

pmNoRejRrcConnMpLoadC

Number of rejected RRC connections due to module MP load control (includes incoming Inter-RAT CC)

Data Source

NodeB_RNC_RXI

Source Field

pmNoRejRrcConnMpLoadC

Source Section

UtranCell

pmNoReqDeniedAdm

Number of RAB estabt & RRC req denied due to admission for both serv & drift UEs.

Data Source

NodeB_RNC_RXI

Source Field

pmNoReqDeniedAdm

Source Section

UtranCell

pmNoRlDeniedAdm

Number of Radio Link setup or Radio Link addition requests denied by admission control.

Data Source

RNC

Source Field

pmNoRlDeniedAdm

Source Section

UtranCell

pmNoRrcConnReqBlockNodeCs

Number of RRC Connection Setup attempts for Circuit Switched calls that fail due to node blocking, counted on the best cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockNodeCs

Source Section

UtranCell

pmNoRrcConnReqBlockNodePs

Number of RRC Connection Setup attempts for Packet Switched calls that fail due to node blocking, counted on the best cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockNodePs

Source Section

UtranCell

pmNoRrcConnReqBlockTnCs

Number of RRC Connection Setup attempts for Circuit Switched calls that fail due to Transport Network blocking, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockTnCs

Source Section

UtranCell

pmNoRrcConnReqBlockTnCsBest

Number of RRC Connection Setup attempts for Circuit Switched calls that fail due to Transport Network blocking, counted on the best cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockTnCsBest

Source Section

UtranCell

pmNoRrcConnReqBlockTnPs

Number of RRC Connection Setup attempts for Packet Switched calls that fail due to Transport Network blocking, counted on the blocking cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockTnPs

Source Section

UtranCell

pmNoRrcConnReqBlockTnPsBest

Number of RRC Connection Setup attempts for Packet Switched calls that fail due to Transport Network blocking, counted on the best cell.

Data Source

RNC

Source Field

pmNoRrcConnReqBlockTnPsBest

Source Section

UtranCell

pmNoRrcCsReqDeniedAdm

Number of CS calls denied by admission control.

Data Source

RNC

Source Field

pmNoRrcCsReqDeniedAdm

Source Section

UtranCell

pmNoRrcPsReqDeniedAdm

Number of PS calls denied by admission control.

Data Source

RNC

Source Field

pmNoRrcPsReqDeniedAdm

Source Section

UtranCell

pmNoRrcReqDeniedAdm

Number of RRC requests denied by admission control.

Data Source

RNC

Source Field

pmNoRrcReqDeniedAdm

Source Section

UtranCell

pmNoRxSduDtchDIPsStr

Total number of received SDUs on a DTCH in DL for a PS Streaming RB. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmNoReceivedSduDtchDIPsStreaming

Source Section

UtranCell

pmNoRxSduDtchUIPsStre

Total number of received SDUs on a DTCH in UL for a PS Streaming RB. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmNoReceivedSduDtchUIPsStreaming

Source Section

UtranCell

pmNoServingCellReqDeniedEul

Number of admission requests denied when requesting the cell as serving cell because the number of E-DCH users is above the admission threshold.

Data Source

RNC

Source Field

pmNoServingCellReqDeniedEul

Source Section

UtranCell

pmNoSpeechDchDiscAbnorm

Number of abnormal disconnect of a speech call for the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoSpeechDchDiscAbnorm

Source Section

UtranCell

pmNoSpeechDchDiscNormal

Number of normal disconnect of a speech call for the Best Cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoSpeechDchDiscNormal

Source Section

UtranCell

pmNoSuccessOutIratHoCs57_RUP

Number of successful outgoing (to GSM) inter-RAT handover for 'streaming 57.6 kbps CS RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSuccessOutIratHoCs57

Source Section

GsmRelation

pmNoSuccessOutIratHoMulti_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'multi RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSuccessOutIratHoMulti

Source Section

GsmRelation

pmNoSuccessOutIratHoSpeech_RUP

Number of successful outgoing (to GSM) inter-RAT handover for 'Conversational speech RAB' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSuccessOutIratHoSpeech

Source Section

GsmRelation

pmNoSuccessOutIratHoStandalone_RUP

Number of attempted outgoing (to GSM) inter-RAT handover for 'Standalone signalling connection' for the best cell in the active set (roll up from GsmRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSuccessOutIratHoStandalone

Source Section

GsmRelation

pmNoSuccessOutSbHoSpeech_RUP

Number of successful outgoing Service Based GSM Handover for 'Conversational speech RAB' for the best cell in the active set.(roll up from GsmRelation)

Data Source

RNC

Source Field

pmNoSuccessOutSbHoSpeech

Source Section

GsmRelation_to_UtranCell

pmNoSysRelSpeechNeighbr

Number of system disconnects of a speech cell for the best cell in the active set due to unknown measured cell (missing neighbour relation). (In P 2.1.4, pmTotNoRrcConnectAttIratCcOrder was used for this purpose.)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSysRelSpeechNeighbr

Source Section

UtranCell

pmNoSysRelSpeechSoHo

Number of system disconnects of a speech cell for the best cell in the active set due to Soft Handover action. (In P 2.1.4, pmFrmNoOfDiscardedFrames was used for this purpose.)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSysRelSpeechSoHo

Source Section

UtranCell

pmNoSysRelSpeechULSynch

Number of system disconnects of a speech cell for the best cell in the active set due to lost UL synch. (In P 2.1.4, pmTotNoRrcConnectAttIratCellResel was used for this purpose.)

Data Source

NodeB_RNC_RXI

Source Field

pmNoSysRelSpeechUISynch

Source Section

UtranCell

pmNoSystemRabReleaseAmrNb

Number of system RAB releases (AMR NB) for the best cell in the Active Set.

Data Source

RNC

Source Field

pmNoSystemRabReleaseAmrNb

Source Section

UtranCell

pmNoSystemRabReleaseAmrWb

Total number of system RAB releases for AMR-WB. Counted only for the best cell in the Active set.

Data Source

RNC

Source Field

pmNoSystemRabReleaseAmrWb

Source Section

UtranCell

pmNoSystemRabReleaseCs64

Number of successful system RAB releases (CS Conversational 64 kpbs [UDI]) referred to the Best Cell in the Active Set.

pmNoSystemRabReleaseCsStream

Number of successful system RAB releases (CS Streaming) referred to the Best Cell in the Active Set.

pmNoSystemRabReleasePacket

Number of successful system RAB releases (PS Data) for the best cell in Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoSystemRabReleasePacket

Source Section

UtranCell

pmNoSystemRabReleasePacketStream

Number of successful system RAB releases (PS Streaming) referred to the Best Cell in the Active Set.

pmNoSystemRabReleasePacketStream128

Number of successful system RAB releases (PS Streaming 128) referred to the Best Cell in the Active Set.

Data Source

RNC

Source Field

pmNoSystemRabReleasePacketStream128

Source Section

UtranCell

pmNoSystemRabReleasePacketUra

Number of system RAB Release of Packet RAB while on URA_PCH.

Data Source

RNC

Source Field

pmNoSystemRabReleasePacketUra

Source Section

UtranCell

pmNoSystemRabReleasePsStreamHs

Number of system initiated RAB releases for PS Interactive RAB mapped on E-DCH/ HSDPA.

Data Source

RNC

Source Field

pmNoSystemRabReleasePsStreamHs

Source Section

UtranCell

pmNoSystemRabReleaseSpeech

Number of successful system RAB releases (Speech) for the best cell in Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoSystemRabReleaseSpeech

Source Section

UtranCell

pmNoSystemRbReleaseEul

Number of system initiated RAB releases for PS Interactive RAB mapped on E-DCH/ HSDPA.

Data Source

RNC

Source Field

pmNoSystemRbReleaseEul

Source Section

UtranCell

pmNoSystemRbReleaseHs

The number of releases of packet RABs mapped on HS-DSCH in the Serving HS-DSCH cell with all other causes than "Normal Release", "Successful Relocation", or "ResourceOptimisation Relocation" indicated by the CN.

Data Source

RNC

Source Field

pmNoSystemRbReleaseHs

Source Section

UtranCell

pmNoTimesCellFailAddToActSet

Number of times a cell fails to be added to an active set.

Data Source

NodeB_RNC_RXI

Source Field

pmNoTimesCellFailAddToActSet

Source Section

UtranCell

pmNoTimesIfhoCellFailAddToActSet

Number of times a cell fails to be added to an active set.

Data Source

RNC

Source Field

pmNoTimesIfhoCellFailAddToActSet

Source Section

UtranCell

pmNoTimesIfhoRIAddToActSet

Number of times an RL is added to an active set.

Data Source

RNC

Source Field

pmNoTimesIfhoRIAddToActSet

Source Section

UtranCell

pmNoTimesRIAddToActSet

Number of succ radio link additions to an active set (including those added when a radio link is replaced)

Data Source

NodeB_RNC_RXI

Source Field

pmNoTimesRIAddToActSet

Source Section

UtranCell

pmNoTimesRIDelFrActSet

Number of succ radio link deletions to an active set (including those added when a radio link is replaced)

Data Source

NodeB_RNC_RXI

Source Field

pmNoTimesRIDelFrActSet

Source Section

UtranCell

pmNoTimesRlRepInActSet

Number of successful radio link is replacements in an active set (stepped in the cell where the radio link is deleted)

Data Source

NodeB_RNC_RXI

Source Field

pmNoTimesRlRepInActSet

Source Section

UtranCell

pmNoTpSwitchSp64Speech

(Retired on P6)Number of successful Packet RAB releases when changing from Multi-RAB (Speech + PS64) to (Speech only) as a result of Multi-RAB down-switch evaluation Speech + PS64 -> Speech for the best cell in Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmNoTpSwitchSp64Speech

Source Section

UtranCell

pmNoUraUpdAttempt

Number of attempted URA updates

Data Source

RNC

Source Field

pmNoUraUpdAttempt

Source Section

UtranCell

pmNoUraUpdSuccess

Number of successful URA updates

Data Source

RNC

Source Field

pmNoUraUpdSuccess

Source Section

UtranCell

pmPhyChnlReconfigAttempt

Physical channel reconfiguration success rate. The counter is stepped when the RRC Physical Channel Reconfiguration message is sent, except when it is sent for inter-frequency hard handovers.

Data Source

GPEH P4

Source Field

pmPhyChnlReconfigAttempt

Source Section

UtranCell

pmPhyChnlReconfigSuccess

Physical channel reconfiguration success rate. The counter is stepped when the RRC Physical Channel Reconfiguration Complete message is received, except when preceded by an RRC Physical Channel Reconfiguration message used for inter-frequency hard handover.

Data Source

GPEH P4

Source Field

pmPhyChnlReconfigSuccess

Source Section

UtranCell

pmPsStreamHsToDchAttempt

Number of reconfiguration HS-DSCH to DCH attempts for RAB type streaming PS (HS), counted in the best cell (if in the SRNC).

Data Source

RNC

Source Field

pmPsStreamHsToDchAttempt

Source Section

UtranCell

pmPsStreamHsToDchSuccess

Number of successful reconfiguration HS-DSCH to DCH successes for RAB type streaming PS (HS), counted in the best cell (if in the SRNC).

Data Source

RNC

Source Field

pmPsStreamHsToDchSuccess

Source Section

UtranCell

pmRabEstablishAttemptBackground

RAB Establishment Attempt. RRC Establishment Cause: 03-originatingBackgroundCall, 08-terminatingBackgroundCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishAttemptBackground

Source Section

UtranCell

pmRabEstablishAttemptConvers

RAB Establishment Attempt. RRC Establishment Cause: 00-originatingConversationalCall, 05-terminatingConversationalCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishAttemptConvers

Source Section

UtranCell

pmRabEstablishAttemptInteractive

RAB Establishment Attempt. RRC Establishment Cause: 02-originatingInteractiveCall, 07-terminatingInteractiveCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishAttemptInteractive

Source Section

UtranCell

pmRabEstablishAttemptStream

RAB Establishment Attempt. RRC Establishment Cause: 01-originatingStreamingCall, 06-terminatingStreamingCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishAttemptStream

Source Section

UtranCell

pmRabEstablishEcAttempt

Number of RAB Establishment attempts for an Emergency Call

Data Source

RNC

Source Field

pmRabEstablishEcAttempt

Source Section

UtranCell

pmRabEstablishEcSuccess

Number of successful RAB Establishment attempts for an Emergency Call

Data Source

RNC

Source Field

pmRabEstablishEcSuccess

Source Section

UtranCell

pmRabEstablishSuccessBackground

RAB Establishment Success. RRC Establishment Cause: 03-originatingBackgroundCall, 08-terminatingBackgroundCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishSuccessBackground

Source Section

UtranCell

pmRabEstablishSuccessConvers

RAB Establishment Success. RRC Establishment Cause: 00-originatingConversationalCall, 05-terminatingConversationalCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishSuccessConvers

Source Section

UtranCell

pmRabEstablishSuccessInteractive

RAB Establishment Success. RRC Establishment Cause: 02-originatingInteractiveCall, 07-terminatingInteractiveCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishSuccessInteractive

Source Section

UtranCell

pmRabEstablishSuccessStream

RAB Establishment Success. RRC Establishment Cause: 01-originatingStreamingCall, 06-terminatingStreamingCall

Data Source

GPEH P5MD

Source Field

pmRabEstablishSuccessStream

Source Section

UtranCell

pmRabEstFailDirRetry

Call Drop due to Directed Retry. Step counter when RANAP RAB Assignment Response is received and cause = Directed Retry

Data Source

GPEH P4

Source Field

pmRabEstFailDirRetry

Source Section

UtranCell

pmRabEstFailGuarBitRateUIUnavail

Requested Guaranteed Bit Rate for UL not Available. Step counter when RANAP RAB Assignment Response is received and cause = Requested Guaranteed Bit Rate for UL not Available.

Data Source

GPEH P4

Source Field

pmRabEstFailGuarBitRateUIUnavail

Source Section

UtranCell

pmRabEstFailInvalidRabId

Invalid RAB ID. Step counter when RANAP RAB Assignment Response is received and cause = Invalid RAB ID.

Data Source

GPEH P4

Source Field

pmRabEstFailInvalidRabId

Source Section

UtranCell

pmRabEstFailInvalidRabParamComb

Invalid RAB Parameters Combination. Step counter when RANAP RAB Assignment Response is received and cause = Invalid RAB Parameters Combination.

Data Source

GPEH P4

Source Field

pmRabEstFailInvalidRabParamComb

Source Section

UtranCell

pmRabEstFailInvalidRabParamValue

Invalid RAB Parameters Value. Step counter when RANAP RAB Assignment Response is received and cause = Invalid RAB Parameters Value. Step counter once from each RAB failed to be setup or modified.

Data Source

GPEH P4

Source Field

pmRabEstFailInvalidRabParamValue

Source Section

UtranCell

pmRabEstFailIuUPFail

Release due to Iu User Plane Failure. Step counter when RANAP RAB Assignment Response is received and cause = Iu User Plane Failure.

Data Source

GPEH P4

Source Field

pmRabEstFailIuUPFail

Source Section

UtranCell

pmRabEstFailMaxBitRateDIUnavail

Requested Maximum Bit Rate for DL not Available. Step counter when RANAP RAB Assignment Response is received and cause = Release due to Requested Maximum Bit Rate for DL not Available.

Data Source

GPEH P4

Source Field

pmRabEstFailMaxBitRateDIUnavail

Source Section

UtranCell

pmRabEstFailMaxBitRateUIUnavail

Requested Maximum Bit Rate for UL not Available. Step counter when RANAP RAB Assignment Response is received and cause = Release due to Requested Maximum Bit Rate for UL not Available.

Data Source

GPEH P4

Source Field

pmRabEstFailMaxBitRateUIUnavail

Source Section

UtranCell

pmRabEstFailNoResource

Release due to No Resource Available. Step counter when RANAP RAB Assignment Response is received and cause = No Resource Available.

Data Source

GPEH P4

Source Field

pmRabEstFailNoResource

Source Section

UtranCell

pmRabEstFailTrafficClassUnavail

Requested Traffic Class not Available. Step counter when RANAP RAB Assignment Response is received and cause = Requested Traffic Class not Available. Step counter once from each RAB failed to be setup or modified.

Data Source

GPEH P4

Source Field

pmRabEstFailTrafficClassUnavail

Source Section

UtranCell

pmRabEstFailTransferDelay

Requested Transfer Delay not Achievable. Step counter when RANAP RAB Assignment Response is received and cause = Requested Transfer Delay not Achievable.

Data Source

GPEH P4

Source Field

pmRabEstFailTransferDelay

Source Section

UtranCell

pmRabEstFailUPNoSupport

User Plane Versions not Supported. Step counter when RANAP RAB Assignment Response is received and cause = User Plane Versions not Supported.

Data Source

GPEH P4

Source Field

pmRabEstFailUPNoSupport

Source Section

UtranCell

pmRabEstFailVioGuarBitRate

Condition Violation for Guaranteed Bit Rate. Step counter when RANAP RAB Assignment Response is received and cause = Condition Violation for Guaranteed Bit Rate.

Data Source

GPEH P4

Source Field

pmRabEstFailVioGuarBitRate

Source Section

UtranCell

pmRabEstFailVioSduParam

Condition Violation for SDU Parameters. Step counter when RANAP RAB Assignment Response is received and cause = Condition Violation for SDU Parameters.

Data Source

GPEH P4

Source Field

pmRabEstFailVioSduParam

Source Section

UtranCell

pmRabEstFailVioTrafficHandlingPrio

Condition Violation for Traffic Handling Priority. Step counter when RANAP RAB Assignment Response is received and cause = Condition Violation for Traffic Handling Priority.

Data Source

GPEH P4

Source Field

pmRabEstFailVioTrafficHandlingPrio

Source Section

UtranCell

pmRabReleasePsBackground

Call Drop, RRC Establishment Cause: 03-originatingBackgroundCall, 08-terminatingBackgroundCall. Service Type: Packet All

Data Source

GPEH P5MD

Source Field

pmRabReleasePsBackground

Source Section

UtranCell

pmRabReleasePsInteractive

Call Drop, RRC Establishment Cause: 02-originatingInteractiveCall, 07-terminatingInteractiveCall. Service Type: Packet HSDPA (HS)

Data Source

GPEH P5MD

Source Field

pmRabReleasePsInteractive

Source Section

UtranCell

pmRadioBearerEstablishAttempt

RB establishment success rate. The counter is stepped when the RRC Radio Bearer Setup message is sent. The counter shall be stepped once for each Radio Bearer requested to be setup.

Data Source

GPEH P4

Source Field

pmRadioBearerEstablishAttempt

Source Section

UtranCell

pmRadioBearerEstablishSuccess

RB establishment success rate. The counter is stepped when the RRC Radio Bearer Setup Complete message is received. The counter is stepped once for each RB requested to be setup in the preceding RRC Radio Bearer Setup message.

Data Source

GPEH P4

Source Field

pmRadioBearerEstablishSuccess

Source Section

UtranCell

pmRadioBearerReconfigAttempt

RB reconfiguration success rate. The counter is stepped when the RRC Radio Bearer Reconfiguration message is sent.

Data Source

GPEH P4

Source Field

pmRadioBearerReconfigAttempt

Source Section

UtranCell

pmRadioBearerReconfigSuccess

RB reconfiguration success rate. GPEH Event: The counter is stepped when the RRC Radio Bearer Reconfiguration Complete message is received.

Data Source

GPEH P4

Source Field

pmRadioBearerReconfigSuccess

Source Section

UtranCell

pmRanapDiscNormal

Due to a Normal Release. Step counter when RANAP Iu Release Request or RANAP RAB Assignment Request is received and cause = Normal Release.

Data Source

GPEH P4

Source Field

pmRanapDiscNormal

Source Section

UtranCell

pmRes1_0

RES distribution 1 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes1(0)

Source Section

UtranCell

pmRes1_1

Number of samples for RES distribution 1, subfield 1

Data Source

RNC

Source Field

pmRes1(1)

Source Section

UtranCell

pmRes1_10

Number of samples for RES distribution 1, subfield 10

Data Source

RNC

Source Field

pmRes1(10)

Source Section

UtranCell

pmRes1_11

Number of samples for RES distribution 1, subfield 11

Data Source

RNC

Source Field

pmRes1(11)

Source Section

UtranCell

pmRes1_12

Number of samples for RES distribution 1, subfield 12

Data Source

RNC

Source Field

pmRes1(12)

Source Section

UtranCell

pmRes1_13

Number of samples for RES distribution 1, subfield 13

Data Source

RNC

Source Field

pmRes1(13)

Source Section

UtranCell

pmRes1_14

Number of samples for RES distribution 1, subfield 14

Data Source

RNC

Source Field

pmRes1(14)

Source Section

UtranCell

pmRes1_15

Number of samples for RES distribution 1, subfield 15

Data Source

RNC

Source Field

pmRes1(15)

Source Section

UtranCell

pmRes1_16

Number of samples for RES distribution 1, subfield 16

Data Source

RNC

Source Field

pmRes1(16)

Source Section

UtranCell

pmRes1_17

Number of samples for RES distribution 1, subfield 17

Data Source

RNC

Source Field

pmRes1(17)

Source Section

UtranCell

pmRes1_18

Number of samples for RES distribution 1, subfield 18

Data Source

RNC

Source Field

pmRes1(18)

Source Section

UtranCell

pmRes1_2

Number of samples for RES distribution 1, subfield 2

Data Source

RNC

Source Field

pmRes1(2)

Source Section

UtranCell

pmRes1_3

Number of samples for RES distribution 1, subfield 3

Data Source

RNC

Source Field

pmRes1(3)

Source Section

UtranCell

pmRes1_4

Number of samples for RES distribution 1, subfield 4

Data Source

RNC

Source Field

pmRes1(4)

Source Section

UtranCell

pmRes1_5

Number of samples for RES distribution 1, subfield 5

Data Source

RNC

Source Field

pmRes1(5)

Source Section

UtranCell

pmRes1_6

Number of samples for RES distribution 1, subfield 6

Data Source

RNC

Source Field

pmRes1(6)

Source Section

UtranCell

pmRes1_7

Number of samples for RES distribution 1, subfield 7

Data Source

RNC

Source Field

pmRes1(7)

Source Section

UtranCell

pmRes1_8

Number of samples for RES distribution 1, subfield 8

Data Source

RNC

Source Field

pmRes1(8)

Source Section

UtranCell

pmRes1_9

Number of samples for RES distribution 1, subfield 9

Data Source

RNC

Source Field

pmRes1(9)

Source Section

UtranCell

pmRes2_0

RES distribution 2 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes2(0)

Source Section

UtranCell

pmRes2_1

Number of samples for RES distribution 2, subfield 1

Data Source

RNC

Source Field

pmRes2(1)

Source Section

UtranCell

pmRes2_10

Number of samples for RES distribution 2, subfield 10

Data Source

RNC

Source Field

pmRes2(10)

Source Section

UtranCell

pmRes2_11

Number of samples for RES distribution 2, subfield 11

Data Source

RNC

Source Field

pmRes2(11)

Source Section

UtranCell

pmRes2_12

Number of samples for RES distribution 2, subfield 12

Data Source

RNC

Source Field

pmRes2(12)

Source Section

UtranCell

pmRes2_13

Number of samples for RES distribution 2, subfield 13

Data Source

RNC

Source Field

pmRes2(13)

Source Section

UtranCell

pmRes2_14

Number of samples for RES distribution 2, subfield 14

Data Source

RNC

Source Field

pmRes2(14)

Source Section

UtranCell

pmRes2_15

Number of samples for RES distribution 2, subfield 15

Data Source

RNC

Source Field

pmRes2(15)

Source Section

UtranCell

pmRes2_16

Number of samples for RES distribution 2, subfield 16

Data Source

RNC

Source Field

pmRes2(16)

Source Section

UtranCell

pmRes2_17

Number of samples for RES distribution 2, subfield 17

Data Source

RNC

Source Field

pmRes2(17)

Source Section

UtranCell

pmRes2_18

Number of samples for RES distribution 2, subfield 18

Data Source

RNC

Source Field

pmRes2(18)

Source Section

UtranCell

pmRes2_2

Number of samples for RES distribution 2, subfield 2

Data Source

RNC

Source Field

pmRes2(2)

Source Section

UtranCell

pmRes2_3

Number of samples for RES distribution 2, subfield 3

Data Source

RNC

Source Field

pmRes2(3)

Source Section

UtranCell

pmRes2_4

Number of samples for RES distribution 2, subfield 4

Data Source

RNC

Source Field

pmRes2(4)

Source Section

UtranCell

pmRes2_5

Number of samples for RES distribution 2, subfield 5

Data Source

RNC

Source Field

pmRes2(5)

Source Section

UtranCell

pmRes2_6

Number of samples for RES distribution 2, subfield 6

Data Source

RNC

Source Field

pmRes2(6)

Source Section

UtranCell

pmRes2_7

Number of samples for RES distribution 2, subfield 7

Data Source

RNC

Source Field

pmRes2(7)

Source Section

UtranCell

pmRes2_8

Number of samples for RES distribution 2, subfield 8

Data Source

RNC

Source Field

pmRes2(8)

Source Section

UtranCell

pmRes2_9

Number of samples for RES distribution 2, subfield 9

Data Source

RNC

Source Field

pmRes2(9)

Source Section

UtranCell

pmRes3_0

RES distribution 3 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes3(0)

Source Section

UtranCell

pmRes3_1

Number of samples for RES distribution 3, subfield 1

Data Source

RNC

Source Field

pmRes3(1)

Source Section

UtranCell

pmRes3_10

Number of samples for RES distribution 3, subfield 10

Data Source

RNC

Source Field

pmRes3(10)

Source Section

UtranCell

pmRes3_11

Number of samples for RES distribution 3, subfield 11

Data Source

RNC

Source Field

pmRes3(11)

Source Section

UtranCell

pmRes3_12

Number of samples for RES distribution 3, subfield 12

Data Source

RNC

Source Field

pmRes3(12)

Source Section

UtranCell

pmRes3_13

Number of samples for RES distribution 3, subfield 13

Data Source

RNC

Source Field

pmRes3(13)

Source Section

UtranCell

pmRes3_14

Number of samples for RES distribution 3, subfield 14

Data Source

RNC

Source Field

pmRes3(14)

Source Section

UtranCell

pmRes3_15

Number of samples for RES distribution 3, subfield 15

Data Source

RNC

Source Field

pmRes3(15)

Source Section

UtranCell

pmRes3_16

Number of samples for RES distribution 3, subfield 16

Data Source

RNC

Source Field

pmRes3(16)

Source Section

UtranCell

pmRes3_17

Number of samples for RES distribution 3, subfield 17

Data Source

RNC

Source Field

pmRes3(17)

Source Section

UtranCell

pmRes3_18

Number of samples for RES distribution 3, subfield 18

Data Source

RNC

Source Field

pmRes3(18)

Source Section

UtranCell

pmRes3_2

Number of samples for RES distribution 3, subfield 2

Data Source

RNC

Source Field

pmRes3(2)

Source Section

UtranCell

pmRes3_3

Number of samples for RES distribution 3, subfield 3

Data Source

RNC

Source Field

pmRes3(3)

Source Section

UtranCell

pmRes3_4

Number of samples for RES distribution 3, subfield 4

Data Source

RNC

Source Field

pmRes3(4)

Source Section

UtranCell

pmRes3_5

Number of samples for RES distribution 3, subfield 5

Data Source

RNC

Source Field

pmRes3(5)

Source Section

UtranCell

pmRes3_6

Number of samples for RES distribution 3, subfield 6

Data Source

RNC

Source Field

pmRes3(6)

Source Section

UtranCell

pmRes3_7

Number of samples for RES distribution 3, subfield 7

Data Source

RNC

Source Field

pmRes3(7)

Source Section

UtranCell

pmRes3_8

Number of samples for RES distribution 3, subfield 8

Data Source

RNC

Source Field

pmRes3(8)

Source Section

UtranCell

pmRes3_9

Number of samples for RES distribution 3, subfield 9

Data Source

RNC

Source Field

pmRes3(9)

Source Section

UtranCell

pmRes4_0

RES distribution 4 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes4(0)

Source Section

UtranCell

pmRes4_1

Number of samples for RES distribution 4, subfield 1

Data Source

RNC

Source Field

pmRes4(1)

Source Section

UtranCell

pmRes4_10

Number of samples for RES distribution 4, subfield 10

Data Source

RNC

Source Field

pmRes4(10)

Source Section

UtranCell

pmRes4_11

Number of samples for RES distribution 4, subfield 11

Data Source

RNC

Source Field

pmRes4(11)

Source Section

UtranCell

pmRes4_12

Number of samples for RES distribution 4, subfield 12

Data Source

RNC

Source Field

pmRes4(12)

Source Section

UtranCell

pmRes4_13

Number of samples for RES distribution 4, subfield 13

Data Source

RNC

Source Field

pmRes4(13)

Source Section

UtranCell

pmRes4_14

Number of samples for RES distribution 4, subfield 14

Data Source

RNC

Source Field

pmRes4(14)

Source Section

UtranCell

pmRes4_15

Number of samples for RES distribution 4, subfield 15

Data Source

RNC

Source Field

pmRes4(15)

Source Section

UtranCell

pmRes4_16

Number of samples for RES distribution 4, subfield 16

Data Source

RNC

Source Field

pmRes4(16)

Source Section

UtranCell

pmRes4_17

Number of samples for RES distribution 4, subfield 17

Data Source

RNC

Source Field

pmRes4(17)

Source Section

UtranCell

pmRes4_18

Number of samples for RES distribution 4, subfield 18

Data Source

RNC

Source Field

pmRes4(18)

Source Section

UtranCell

pmRes4_2

Number of samples for RES distribution 4, subfield 2

Data Source

RNC

Source Field

pmRes4(2)

Source Section

UtranCell

pmRes4_3

Number of samples for RES distribution 4, subfield 3

Data Source

RNC

Source Field

pmRes4(3)

Source Section

UtranCell

pmRes4_4

Number of samples for RES distribution 4, subfield 4

Data Source

RNC

Source Field

pmRes4(4)

Source Section

UtranCell

pmRes4_5

Number of samples for RES distribution 4, subfield 5

Data Source

RNC

Source Field

pmRes4(5)

Source Section

UtranCell

pmRes4_6

Number of samples for RES distribution 4, subfield 6

Data Source

RNC

Source Field

pmRes4(6)

Source Section

UtranCell

pmRes4_7

Number of samples for RES distribution 4, subfield 7

Data Source

RNC

Source Field

pmRes4(7)

Source Section

UtranCell

pmRes4_8

Number of samples for RES distribution 4, subfield 8

Data Source

RNC

Source Field

pmRes4(8)

Source Section

UtranCell

pmRes4_9

Number of samples for RES distribution 4, subfield 9

Data Source

RNC

Source Field

pmRes4(9)

Source Section

UtranCell

pmRes5_0

RES distribution 5 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes5(0)

Source Section

UtranCell

pmRes5_1

Number of samples for RES distribution 5, subfield 1

Data Source

RNC

Source Field

pmRes5(1)

Source Section

UtranCell

pmRes5_10

Number of samples for RES distribution 5, subfield 10

Data Source

RNC

Source Field

pmRes5(10)

Source Section

UtranCell

pmRes5_11

Number of samples for RES distribution 5, subfield 11

Data Source

RNC

Source Field

pmRes5(11)

Source Section

UtranCell

pmRes5_12

Number of samples for RES distribution 5, subfield 12

Data Source

RNC

Source Field

pmRes5(12)

Source Section

UtranCell

pmRes5_13

Number of samples for RES distribution 5, subfield 13

Data Source

RNC

Source Field

pmRes5(13)

Source Section

UtranCell

pmRes5_14

Number of samples for RES distribution 5, subfield 14

Data Source

RNC

Source Field

pmRes5(14)

Source Section

UtranCell

pmRes5_15

Number of samples for RES distribution 5, subfield 15

Data Source

RNC

Source Field

pmRes5(15)

Source Section

UtranCell

pmRes5_16

Number of samples for RES distribution 5, subfield 16

Data Source

RNC

Source Field

pmRes5(16)

Source Section

UtranCell

pmRes5_17

Number of samples for RES distribution 5, subfield 17

Data Source

RNC

Source Field

pmRes5(17)

Source Section

UtranCell

pmRes5_18

Number of samples for RES distribution 5, subfield 18

Data Source

RNC

Source Field

pmRes5(18)

Source Section

UtranCell

pmRes5_2

Number of samples for RES distribution 5, subfield 2

Data Source

RNC

Source Field

pmRes5(2)

Source Section

UtranCell

pmRes5_3

Number of samples for RES distribution 5, subfield 3

Data Source

RNC

Source Field

pmRes5(3)

Source Section

UtranCell

pmRes5_4

Number of samples for RES distribution 5, subfield 4

Data Source

RNC

Source Field

pmRes5(4)

Source Section

UtranCell

pmRes5_5

Number of samples for RES distribution 5, subfield 5

Data Source

RNC

Source Field

pmRes5(5)

Source Section

UtranCell

pmRes5_6

Number of samples for RES distribution 5, subfield 6

Data Source

RNC

Source Field

pmRes5(6)

Source Section

UtranCell

pmRes5_7

Number of samples for RES distribution 5, subfield 7

Data Source

RNC

Source Field

pmRes5(7)

Source Section

UtranCell

pmRes5_8

Number of samples for RES distribution 5, subfield 8

Data Source

RNC

Source Field

pmRes5(8)

Source Section

UtranCell

pmRes5_9

Number of samples for RES distribution 5, subfield 9

Data Source

RNC

Source Field

pmRes5(9)

Source Section

UtranCell

pmRes6_0

RES distribution 6 recorded service and measurement quantity (256*service + measurement quantity)

Data Source

RNC

Source Field

pmRes6(0)

Source Section

UtranCell

pmRes6_1

Number of samples for RES distribution 6, subfield 1

Data Source

RNC

Source Field

pmRes6(1)

Source Section

UtranCell

pmRes6_10

Number of samples for RES distribution 6, subfield 10

Data Source

RNC

Source Field

pmRes6(10)

Source Section

UtranCell

pmRes6_11

Number of samples for RES distribution 6, subfield 11

Data Source

RNC

Source Field

pmRes6(11)

Source Section

UtranCell

pmRes6_12

Number of samples for RES distribution 6, subfield 12

Data Source

RNC

Source Field

pmRes6(12)

Source Section

UtranCell

pmRes6_13

Number of samples for RES distribution 6, subfield 13

Data Source

RNC

Source Field

pmRes6(13)

Source Section

UtranCell

pmRes6_14

Number of samples for RES distribution 6, subfield 14

Data Source

RNC

Source Field

pmRes6(14)

Source Section

UtranCell

pmRes6_15

Number of samples for RES distribution 6, subfield 15

Data Source

RNC

Source Field

pmRes6(15)

Source Section

UtranCell

pmRes6_16

Number of samples for RES distribution 6, subfield 16

Data Source

RNC

Source Field

pmRes6(16)

Source Section

UtranCell

pmRes6_17

Number of samples for RES distribution 6, subfield 17

Data Source

RNC

Source Field

pmRes6(17)

Source Section

UtranCell

pmRes6_18

Number of samples for RES distribution 6, subfield 18

Data Source

RNC

Source Field

pmRes6(18)

Source Section

UtranCell

pmRes6_2

Number of samples for RES distribution 6, subfield 2

Data Source

RNC

Source Field

pmRes6(2)

Source Section

UtranCell

pmRes6_3

Number of samples for RES distribution 6, subfield 3

Data Source

RNC

Source Field

pmRes6(3)

Source Section

UtranCell

pmRes6_4

Number of samples for RES distribution 6, subfield 4

Data Source

RNC

Source Field

pmRes6(4)

Source Section

UtranCell

pmRes6_5

Number of samples for RES distribution 6, subfield 5

Data Source

RNC

Source Field

pmRes6(5)

Source Section

UtranCell

pmRes6_6

Number of samples for RES distribution 6, subfield 6

Data Source

RNC

Source Field

pmRes6(6)

Source Section

UtranCell

pmRes6_7

Number of samples for RES distribution 6, subfield 7

Data Source

RNC

Source Field

pmRes6(7)

Source Section

UtranCell

pmRes6_8

Number of samples for RES distribution 6, subfield 8

Data Source

RNC

Source Field

pmRes6(8)

Source Section

UtranCell

pmRes6_9

Number of samples for RES distribution 6, subfield 9

Data Source

RNC

Source Field

pmRes6(9)

Source Section

UtranCell

pmRIAddAttemptsBestCellCsConvers

Number Radio Link additions attempted for conversational 64 Kbps CS RAB where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddAttemptsBestCellCsConvers

Source Section

UtranCell

pmRIAddAttemptsBestCellPacketHigh

Number Radio Link additions attempted for interactive PS RAB with data rate higher than 64 Kbps where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddAttemptsBestCellPacketHigh

Source Section

UtranCell

pmRIAddAttemptsBestCellPacketLow

Number of attempted radio link additions for low-rate packet RABs (radio connections in states with low-rate packet connections: Packet64/64; Speech + Packet 64kpbs; and PS Streaming)

Source Field

pmRIAddAttemptsBestCellPacketLow

Source Section

UtranCell

pmRIAddAttemptsBestCellSpeech

Number Radio Link additions attempted for speech 12.2 Kbps CS RAB where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddAttemptsBestCellSpeech

Source Section

UtranCell

pmRIAddAttemptsBestCellStandAlone

Number Radio Link additions attempted for RRC only connections where this cell is the source cell and best cell in the active set

Source Field

pmRIAddAttemptsBestCellStandAlone

Source Section

UtranCell

pmRIAddAttemptsBestCellStream

Number of radio link additions attempted for streaming RABs (radio connections in states with streaming connections: 57kbps CS data, variable rate, PS Streaming 16/64 + Packet 8kbps, and PS Streaming 16/128 + Packet 8Kbps)

Source Field

pmRIAddAttemptsBestCellStream

Source Section

UtranCell

pmRIAddSuccessBestCellCsConvers

Number Radio Link additions for conversational 64 Kbps CS RAB that succeeded where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddSuccessBestCellCsConvers

Source Section

UtranCell

pmRIAddSuccessBestCellPacketHigh

Number Radio Link additions for interactive PS RAB with data rate higher than 64 Kbps that succeeded where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddSuccessBestCellPacketHigh

Source Section

UtranCell

pmRIAddSuccessBestCellPacketLow

Number of succeeded radio link additions for low-rate packet RABs (radio connections in states with low rate packet connections: Packet 64/64; Speech + packet 64Kbps; and PS Streaming)

Source Field

pmRIAddSuccessBestCellPacketLow

Source Section

UtranCell

pmRIAddSuccessBestCellSpeech

Number Radio Link additions for speech 12.2 kbps CS RAB that succeeded where this cell is the source cell and the best cell in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellSpeech

Source Section

UtranCell

pmRIAddSuccessBestCellStandAlone

Number Radio Link additions for RRC only connections that succeeded where this cell is the source cell and the best cell in the active set

Source Field

pmRIAddSuccessBestCellStandAlone

Source Section

UtranCell

pmRIAddSuccessBestCellStream

Number of radio link additions succeeded for streaming RABs (radio connections in states with streaming connections: 57kbps CS data, variable rate, PS Streaming 16/64 + Packet 8kbps, and PS Streaming 16/128 + Packet 8Kbps)

Source Field

pmRIAddSuccessBestCellStream

Source Section

UtranCell

pmRrcEstablishAttemptBackground

RRC Connection Request Attempts. RRC Establishment Cause: 03-originatingBackgroundCall, 08-terminatingBackgroundCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishAttemptBackground

Source Section

UtranCell

pmRrcEstablishAttemptConvers

RRC Connection Request Attempts. RRC Establishment Cause: 00-originatingConversationalCall, 05-terminatingConversationalCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishAttemptConvers

Source Section

UtranCell

pmRrcEstablishAttemptInteractive

RRC Connection Request Attempts. RRC Establishment Cause: 02-originatingInteractiveCall, 07-terminatingInteractiveCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishAttemptInteractive

Source Section

UtranCell

pmRrcEstablishAttemptStream

RRC Connection Request Attempts. RRC Establishment Cause: 01-originatingStreamingCall, 06-terminatingStreamingCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishAttemptStream

Source Section

UtranCell

pmRrcEstablishSuccessBackground

RRC Connection Request Success. RRC Establishment Cause: 03-originatingBackgroundCall, 08-terminatingBackgroundCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishSuccessBackground

Source Section

UtranCell

pmRrcEstablishSuccessConvers

RRC Connection Request Success. RRC Establishment Cause: 00-originatingConversationalCall, 05-terminatingConversationalCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishSuccessConvers

Source Section

UtranCell

pmRrcEstablishSuccessInteractive

RRC Connection Request Success. RRC Establishment Cause: 02-originatingInteractiveCall, 07-terminatingInteractiveCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishSuccessInteractive

Source Section

UtranCell

pmRrcEstablishSuccessStream

RRC Connection Request Success. RRC Establishment Cause: 01-originatingStreamingCall, 06-terminatingStreamingCall

Data Source

GPEH P5MD

Source Field

pmRrcEstablishSuccessStream

Source Section

UtranCell

pmSamplesActDIRlcTotPacketThp

(Retired on P6) Number of samples in pmSumActDIRlcTotPacketThp (i.e. pmSamplesActDIRlcTotPacketThp = pmSumActDIRlcTotPacketThp + 1, whenever pmSumActDIRlcTotPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesActDIRlcTotPacketThp

Source Section

UtranCell

pmSamplesActDIRlcUserPacketThp

(Retired on P6) Number of samples in pmSumActDIRlcUserPacketThp (i.e. pmSamplesActDIRlcUserPacketThp = pmSumActDIRlcUserPacketThp + 1, whenever pmSumActDIRlcUserPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesActDIRlcUserPacketThp

Source Section

UtranCell

pmSamplesActUIRlcTotPacketThp

(Retired on P6) Number of samples in pmSumActUIRlcTotPacketThp (i.e. pmSamplesActUIRlcTotPacketThp = pmSumActUIRlcTotPacketThp + 1, whenever pmSumActUIRlcTotPacketThp is to be updated, this means if no data is transmitted the counter is not incremented)

Data Source

RNC

Source Field

pmSamplesActUIRlcTotPacketThp

Source Section

UtranCell

pmSamplesActUIRlcUserPacketThp

(Retired on P6)Number of samples in pmSumActUIRlcUserPacketThp (i.e. pmSamplesActUIRlcUserPacketThp = pmSumActUIRlcUserPacketThp +1, whenever pmSumActUIRlcUserPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesActUIRlcUserPacketThp

Source Section

UtranCell

pmSamplesAmr12200RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR12200 RABs established'.

Data Source

RNC

Source Field

pmSamplesAmr12200RabEstablish

Source Section

UtranCell

pmSamplesAmr4750RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR4750 RABs established'.

Data Source

RNC

Source Field

pmSamplesAmr4750RabEstablish

Source Section

UtranCell

pmSamplesAmr5900RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR5900 RABs established'.

Data Source

RNC

Source Field

pmSamplesAmr5900RabEstablish

Source Section

UtranCell

pmSamplesAmr7950RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR7950 RABs established'.

Data Source

RNC

Source Field

pmSamplesAmr7950RabEstablish

Source Section

UtranCell

pmSamplesAmrWbRabEstablish

Number of samples recorded within the ROP period for number of active AMRWB RABs per cell .

Data Source

RNC

Source Field

pmSamplesAmrWbRabEstablish

Source Section

UtranCell

pmSamplesBestAmr12200RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR12200 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestAmr12200RabEstablish

Source Section

UtranCell

pmSamplesBestAmr4750RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR4750 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestAmr4750RabEstablish

Source Section

UtranCell

pmSamplesBestAmr5900RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR5900 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestAmr5900RabEstablish

Source Section

UtranCell

pmSamplesBestAmr7950RabEstablish

Number of samples recorded within the ROP period for 'Number of Speech AMR7950 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestAmr7950RabEstablish

Source Section

UtranCell

pmSamplesBestAmrWbRabEstablish

Number of samples recorded within the ROP period for number of active AMRWB RABs per best cell.

Data Source

RNC

Source Field

pmSamplesBestAmrWbRabEstablish

Source Section

UtranCell

pmSamplesBestCs12Establish

Number of samples recorded within the ROP period for 'number of distinct CS speech users', referred to the best cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesBestCs12Establish

Source Section

UtranCell

pmSamplesBestCs12PsIntRabEstablish

Number of samples recorded within the ROP period for 'Number of PS Interactive + Speech multi-RABs established, regardless of PS rate', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestCs12PsIntRabEstablish

Source Section

UtranCell

pmSamplesBestCs57RabEstablish

Number of samples recorded within the ROP period for 'Number of streaming 57.6 kbit CS RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestCs57RabEstablish

Source Section

UtranCell

pmSamplesBestCs64PsIntRabEstablish

Number of samples recorded within the ROP period for 'Number of PS Interactive + conversational 64 kbps CS multi- RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestCs64PsIntRabEstablish

Source Section

UtranCell

pmSamplesBestCs64RabEstablish

Number of samples recorded within the ROP period for 'Number of conversational 64 kbit CS RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestCs64RabEstablish

Source Section

UtranCell

pmSamplesBestDchPsIntRabEstablish

Number of samples recorded within the ROP period for 'Number of PS Interactive RABs established, regardless of rate', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesBestDchPsIntRabEstablish

Source Section

UtranCell

pmSamplesBestPsEulRabEstablish

Stepped every time the corresponding sum counter of the best cell, pmSumBestPsEulRabEstablish, is incremented.

Data Source

RNC

Source Field

pmSamplesBestPsEulRabEstablish

Source Section

UtranCell

pmSamplesBestPsHsAdchRabEstablish

Number of samples recorded within the ROP period for 'Number of A-DCHs established in the cell which is the best cell in the active set'.

Data Source

RNC

pmSamplesBestPsStr128Ps8RabEstablish

Number of samples recorded within the ROP period for 'Number of PS Streaming 16/128 + Packet 8kbps PS multi- RABs established referred to the best cell in the AS'.

Data Source

RNC

Source Field

pmSamplesBestPsStr128Ps8RabEstablish

Source Section

UtranCell

pmSamplesBestPsStr64Ps8RabEstablish

Number of samples recorded within the ROP period for 'Number of PS Streaming 16/64 + Packet 8kbps PS multiRABs established referred to the best cell in the AS'

Data Source

RNC

Source Field

pmSamplesBestPsStr64Ps8RabEstablish

Source Section

UtranCell

pmSamplesBestPsStreamHsRabEst

Number of samples in pmSumBestPsStreamHsRabEst (that is, pmSamplesBestPsStreamHsRabEst = pmSumBestPsStreamHsRabEst + 1, whenever pmSampleBestPsStreamHsRabEst is to be updated).

Data Source

RNC

Source Field

pmSamplesBestPsStreamHsRabEst

Source Section

UtranCell

pmSamplesCompMode

Number of samples during ROP for Compressed mode users.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCompMode

Source Section

UtranCell

pmSamplesCs12Ps0RabEstablish

Number of samples recorded within the ROP period for number of active speech CS plus 0/0 PS multi RABs established

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCs12Ps0RabEstablish

Source Section

UtranCell

pmSamplesCs12Ps64RabEstablish

Number of samples recorded within the ROP period for number of active speech CS plus 64/64 kbps PS multi RABs.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCs12Ps64RabEstablish

Source Section

UtranCell

pmSamplesCs12RabEstablish

Number of samples recorded within the ROP period for number of active speech 12.2 kbps RABs.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCs12RabEstablish

Source Section

UtranCell

pmSamplesCs57RabEstablish

Number of samples recorded within the ROP period for number of streaming 57.6 kbps CS RABs established

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCs57RabEstablish

Source Section

UtranCell

pmSamplesCs64Ps8RabEstablish

Number of samples recorded in the ROP period for the multi RAB UDI+8/8

Data Source

RNC

Source Field

pmSamplesCs64Ps8RabEstablish

Source Section

UtranCell

pmSamplesCs64RabEstablish

Number of samples recorded within the ROP period for number of conversational 64 kbps CS RABs established

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesCs64RabEstablish

Source Section

UtranCell

pmSamplesDchDIRlcTotPacketThp

Number of samples in pmSumDchDIRlcTotPacketThp (i.e. pmSamplesDchDIRlcTotPacketThp= pmSamplesDchDIRlcTotPacketThp+1, whenever pmSumDchDIRlcTotPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDIRlcTotPacketThp

Source Section

UtranCell

pmSamplesDchDIRlcUserPacketThp

Number of samples in pmSumDchDIRlcUserPacketThp (i.e. pmSamplesDchDIRlcUserPacketThp = pmSumDchDIRlcUserPacketThp +1, whenever pmSumDchDIRlcUserPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesDchDIRlcUserPacketThp

Source Section

UtranCell

pmSamplesDchUIRlcTotPacketThp

Number of samples in pmSumDchUIRlcUserPacketThp (i.e. pmSamplesDchUIRlcTotPacketThp= pmSumDchUIRlcUserPacketThp+1, whenever pmSumDchUIRlcTotPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesDchUIRlcTotPacketThp

Source Section

UtranCell

pmSamplesDchUIRlcUserPacketThp

Number of samples in pmSumDchUIRlcUserPacketThp (i.e. pmSamplesDchUIRlcUserPacketThp = pmSumDchUIRlcUserPacketThp +1, whenever pmSumDchUIRlcUserPacketThp is to be updated).

Data Source

RNC

Source Field

pmSamplesDchUIRlcUserPacketThp

Source Section

UtranCell

pmSamplesDlCode

Number of samples in pmSumDlCode (that is, pmSamplesDlCode = pmSumDlCode + 1, whenever pmSumDlCode is to be updated).

Data Source

RNC

Source Field

pmSamplesDlCode

Source Section

UtranCell

pmSamplesDlRlcUserThpPsStr128

Number of samples in pmSumDlRlcUserThpPsStream128 (that is, pmSamplesDlRlcUserThpPsStream128 = pmSumDlRlcUserThpPsStream128 + 1, whenever pmSumDlRlcUserThpPsStream128 is to be updated)

Data Source

RNC

Source Field

pmSamplesDlRlcUserThpPsStream128

Source Section

UtranCell

pmSamplesDlRlcUserThpPsStr64

Number of samples in pmSumDlRlcUserThpPsStream64 (that is, pmSamplesDlRlcUserThpPsStream64 = pmSumDlRlcUserThpPsStream64 + 1, whenever pmSumDlRlcUserThpPsStream64 is to be updated)

Data Source

RNC

Source Field

pmSamplesDIRlcUserThpPsStream64

Source Section

UtranCell

pmSamplesDIRlcUserThpPsStrHs

Number of samples in pmSumDIRlcUserThpPsStreamHs (that is, pmSamplesDIRlcUserThpPsStreamHs = pmSumDIRlcUserThpPsStreamHs +1, whenever pmSumDIRlcUserThpPsStreamHs isto be updated).

Data Source

RNC

Source Field

pmSamplesDIRlcUserThpPsStreamHs

Source Section

UtranCell

pmSamplesEulRlcTotPacketThp

Number of samples in pmSumEulRlcTotPacketThp (that is, pmSamplesEulRlcTotPacketThp = pmSumEulRlcTotPacketThp +1, whenever pmSumEulRlcTotPacketThp is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesEulRlcTotPacketThp

Source Section

Eul

pmSamplesEulRlcUserPacketThp

Number of samples in pmSumEulRlcUserPacketThp (that is, pmSamplesEulRlcUserPacketThp = pmSumEulRlcUserPacketThp +1, whenever pmSumEulRlcUserPacketThp is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesEulRlcUserPacketThp

Source Section

Eul

pmSamplesFachPsIntRabEstablish

Number of samples recorded within the ROP period for 'Number of PS RABs in state FACH established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSamplesFachPsIntRabEstablish

Source Section

UtranCell

pmSamplesHsDIRlcTotPacketThp

Number of samples in pmSumHsDIRlcTotPacketThp (that is, pmSamplesHsDIRlcTotPacketThp = pmSumHsDIRlcTotPacketThp +1, whenever pmSumHsDIRlcTotPacketThp is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesHsDIRlcTotPacketThp

Source Section

HsdSCH

pmSamplesHsDIRlcUserPacketThp

Number of samples in pmSumHsDIRlcUserPacketThp (that is, pmSamplesHsDIRlcUserPacketThp = pmSumHsDIRlcUserPacketThp +1, whenever pmSumHsDIRlcUserPacketThp is to be updated). Reset at each ROP period.

Data Source

RNC

Source Field

pmSamplesHsDIRlcUserPacketThp

Source Section

HsdSch

pmSamplesPacketDIDelay_0

Number of samples in pmSumPacketDIDelay (that is, pmSamplesPacketDIDelay = pmSumPacketDIDelay +1, whenever pmSumPacketDIDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketDIDelay

Source Section

UtranCell

pmSamplesPacketDIDelay_1

Number of samples in pmSumPacketDIDelay (that is, pmSamplesPacketDIDelay = pmSumPacketDIDelay +1, whenever pmSumPacketDIDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketDIDelay

Source Section

UtranCell

pmSamplesPacketDlDelay_2

Number of samples in pmSumPacketDlDelay (that is, pmSamplesPacketDlDelay = pmSumPacketDlDelay +1, whenever pmSumPacketDlDelay is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketDlDelay

Source Section

UtranCell

pmSamplesPacketLatency_0

Number of samples in pmSumPacketLatency (that is, pmSamplesPacketLatency = pmSumPacketLatency +1, whenever pmSumPacketLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatency

Source Section

UtranCell

pmSamplesPacketLatency_1

Number of samples in pmSumPacketLatency (that is, pmSamplesPacketLatency = pmSumPacketLatency +1, whenever pmSumPacketLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatency

Source Section

UtranCell

pmSamplesPacketLatency_2

Number of samples in pmSumPacketLatency (that is, pmSamplesPacketLatency = pmSamplesPacketLatency + 1, whenever pmSumPacketLatency is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatency

Source Section

UtranCell

pmSamplesPktLatencyPsStrHs_0

Number of samples in pmSumPacketLatencyPsStreamHs (that is, pmSamplesPacketLatencyPsStreamHs = pmSamplesPacketLatencyPsStreamHs + 1, whenever pmSumPacketLatencyPsStreamHs is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatencyPsStreamHs

Source Section

UtranCell

pmSamplesPktLatencyPsStrHs_1

Number of samples in pmSumPacketLatencyPsStreamHs (that is, pmSamplesPacketLatencyPsStreamHs = pmSamplesPacketLatencyPsStreamHs + 1, whenever pmSumPacketLatencyPsStreamHs is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatencyPsStreamHs

Source Section

UtranCell

pmSamplesPktLatencyPsStrHs_2

Number of samples in pmSumPacketLatencyPsStreamHs (that is, pmSamplesPacketLatencyPsStreamHs = pmSumPacketLatencyPsStreamHs +1, whenever pmSumPacketLatencyPsStreamHs is to be updated).

Data Source

RNC

Source Field

pmSamplesPacketLatencyPsStreamHs

Source Section

UtranCell

pmSamplesPs128RabEstablish

Number of samples recorded within the ROP period for number of 128 kbps PS RABs established- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesPs128RabEstablish

Source Section

UtranCell

pmSamplesPs384RabEstablish

Number of samples recorded within the ROP period for number of 384 kbps PS RABs established- Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesPs384RabEstablish

Source Section

UtranCell

pmSamplesPs64RabEstablish

Number of samples recorded within the ROP period for number of active PS64 kbps RABs-
Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesPs64RabEstablish

Source Section

UtranCell

pmSamplesPsEulRabEstablish

Stepped every time the corresponding sum counter of all cells, pmSumPsEulRabEstablish, is
incremented.

Data Source

RNC

Source Field

pmSamplesPsEulRabEstablish

Source Section

UtranCell

pmSamplesPsHsAdchRabEstablish

Number of samples recorded within the ROP period for 'Number of A-DCHs established'.

Data Source

RNC

Source Field

pmSamplesPsHsAdchRabEstablish

Source Section

UtranCell

pmSamplesPsInteractive

Number of samples recorded within the ROP period for 'Number of Interactive PS RABs established excluding RABs on HS configurations or CELL_FACH'.

Data Source

RNC

Source Field

pmSamplesPsInteractive

Source Section

UtranCell

pmSamplesPsStr128Ps8RabEstablish

Number of samples recorded within the ROP period for 'Number of PS Streaming 16/128 + Packet 8kbps PS multi- RABs established'.

Data Source

RNC

Source Field

pmSamplesPsStr128Ps8RabEstablish

Source Section

UtranCell

pmSamplesPsStr64Ps8RabEstablish

Number of samples recorded within the ROP period for number of active PS streaming plus PS8 multi RABs. pmSumPsStr64Ps8RabEstablish/pmSamplesPsStr64Ps8RabEstablish gives the average number of PS Streaming + PS8 multiRABs which were active during a ROP per

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesPsStr64Ps8RabEstablish

Source Section

UtranCell

pmSamplesPsStreamHsRabEst

Number of samples in pmSumPsStreamHsRabEst (that is, pmSamplesPsStreamHsRabEst = pmSumPsStreamHsRabEst +1, whenever pmSumPsStreamHsRabEst is to be updated).

Data Source

RNC

Source Field

pmSamplesPsStreamHsRabEst

Source Section

UtranCell

pmSamplesRabFach

(Retired on P6)Number of samples recorded within the ROP for the Number of RABs per FACH channel.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesRabFach

Source Section

UtranCell

pmSamplesRrcOnlyEstablish

Number of samples recorded within the ROP period for number of active RRC-only connections.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesRrcOnlyEstablish

Source Section

UtranCell

pmSamplesSf4Ul

Number of samples of the amount of radio links that are on Spreading Factor (SF) = 4 (384 kbps) in UL in a cell during a ROP period.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmSamplesSf4Ul

Source Section

UtranCell

pmSamplesUesWith1Rls1RlInActSet

Number of samples rec within the ROP UEs one RL set & one RL in the active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith1Rls1RlInActSet

Source Section

UtranCell

pmSamplesUesWith1Rls2RlInActSet

Number of samples rec within ROP for Number of UEs with one RL set & two RLs active set

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith1Rls2RlInActSet

Source Section

UtranCell

pmSamplesUesWith1Rls3RlInActSet

Number samples rec within the ROP Number UEs with one RL set & three or more RLs active

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith1Rls3RlInActSet

Source Section

UtranCell

pmSamplesUesWith2Rls2RlInActSet

Number samples rec within ROP Number UEs with two RL sets & two radio links in active.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith2Rls2RlInActSet

Source Section

UtranCell

pmSamplesUesWith2Rls3RlInActSet

Number samples rec within ROP Number UEs with two RL sets & three radio link active set

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith2Rls3RlInActSet

Source Section

UtranCell

pmSamplesUesWith2Rls4RlInActSet

Number samples rec within ROP Number of UEs with two RL sets & four radio links active.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith2Rls4RlInActSet

Source Section

UtranCell

pmSamplesUesWith3Rls3RlInActSet

Number samples rec within the ROP Number of UEs with three RL sets & three RLs active.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith3Rls3RlInActSet

Source Section

UtranCell

pmSamplesUesWith3Rls4RlInActSet

Number samples rec within ROP Number UEs with three RL sets & four radio links active.

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith3Rls4RlInActSet

Source Section

UtranCell

pmSamplesUesWith4Rls4RlInActSet

Number samples rec within ROP Number UEs with four RL sets (one radio link possible RL)

Data Source

NodeB_RNC_RXI

Source Field

pmSamplesUesWith4Rls4RlInActSet

Source Section

UtranCell

pmSamplesUIRlcUserThpPsStr128

Number of samples in pmSumUIRlcUserThpPsStream128 (that is, pmSamplesUIRlcUserThpPsStream128 = pmSamplesUIRlcUserThpPsStream128 + 1, whenever pmSumUIRlcUserThpPsStream128 is to be updated).

Data Source

RNC

Source Field

pmSamplesUIRlcUserThpPsStream128

Source Section

UtranCell

pmSamplesUIRlcUserThpPsStr16

Number of samples in pmSumUIRlcUserThpPsStream16 (that is, pmSamplesUIRlcUserThpPsStream16 = pmSamplesUIRlcUserThpPsStream16 + 1, whenever pmSumUIRlcUserThpPsStream16 is to be updated)

Data Source

RNC

Source Field

pmSamplesUIRlcUserThpPsStream16

Source Section

UtranCell

pmSamplesUIRlcUserThpPsStr32

Number of samples in pmSumUIRlcUserThpPsStream32 (that is, pmSamplesUIRlcUserThpPsStream32 = pmSamplesUIRlcUserThpPsStream32 + 1, whenever pmSumUIRlcUserThpPsStream32 is to be updated).

Data Source

RNC

Source Field

pmSamplesUIRlcUserThpPsStream32

Source Section

UtranCell

pmSamplesUIRssi

Number of received NBAP Common Measurement Report messages containing valid RTWP value. RTWP (Received Total Wideband Power) is a measurement of uplink RSSI and is defined in 3GPP TS 25.433 (NBAP).

Data Source

RNC

Source Field

pmSamplesUIRssi

Source Section

UtranCell

pmServiceDeniedCodeShortageCs57

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS57 RAB is denied by admission control due to a shortage of channelization codes.

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortageCs57

Source Section

UtranCell

pmServiceDeniedCodeShortageCs64

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS64 RAB is denied by admission control due to a shortage of channelization codes.

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortageCs64

Source Section

UtranCell

pmServiceDeniedCodeShortageCsSpeech

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS Speech RAB is denied by admission control due to a shortage of channelization codes.

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortageCsSpeech

Source Section

UtranCell

pmServiceDeniedCodeShortageHs

PS Data Service denied ratio. This counter is stepped when an establishment request for a HS RAB is denied by admission control due to a shortage of channelization codes.

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortageHs

Source Section

UtranCell

pmServiceDeniedCodeShortagePacket

PS Data Service denied ratio. This counter is stepped when an establishment request for a PS/HS RAB is denied by admission control due to a shortage of channelization codes.

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortagePacket

Source Section

UtranCell

pmServiceDeniedCodeShortagePs64

Not in vendor doc. But in Sample file

Data Source

GPEH P4

Source Field

pmServiceDeniedCodeShortagePs64

Source Section

UtranCell

pmServiceDeniedDlPowerCs57

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS57 RAB is denied by admission control due to not enough DL Power.

Data Source

GPEH P4

Source Field

pmServiceDeniedDlPowerCs57

Source Section

UtranCell

pmServiceDeniedDIPowerCs64

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS64 RAB is denied by admission control due to not enough DL Power.

Data Source

GPEH P4

Source Field

pmServiceDeniedDIPowerCs64

Source Section

UtranCell

pmServiceDeniedDIPowerCsSpeech

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS Speech RAB is denied by admission control due to not enough DL Power.

Data Source

GPEH P4

Source Field

pmServiceDeniedDIPowerCsSpeech

Source Section

UtranCell

pmServiceDeniedDIPowerHs

PS Data Service denied ratio. This counter is stepped when an establishment request for a HS RAB is denied by admission control due to not enough DL Power.

Data Source

GPEH P4

Source Field

pmServiceDeniedDIPowerHs

Source Section

UtranCell

pmServiceDeniedDIPowerPacket

PS Data Service denied ratio. This counter is stepped when an establishment request for a PS RAB is denied by admission control due to not enough DL Power.

Data Source

GPEH P4

Source Field

pmServiceDeniedDIPowerPacket

Source Section

UtranCell

pmServiceDeniedDIPowerPs64

Not in vendor doc. But in Sample file

Data Source

GPEH P4

Source Field

pmServiceDeniedDIPowerPs64

Source Section

UtranCell

pmServiceDeniedOtherCs57

CS Data Service denied ratio. GPEH Event: Internal_System_Block,
Internal_Rab_Establishment

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherCs57

Source Section

UtranCell

pmServiceDeniedOtherCs64

CS Data Service denied ratio. GPEH Event: Internal_System_Block,
Internal_Rab_Establishment

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherCs64

Source Section

UtranCell

pmServiceDeniedOtherCsSpeech

CS Data Service denied ratio. GPEH Event: Internal_System_Block,
Internal_Rab_Establishment

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherCsSpeech

Source Section

UtranCell

pmServiceDeniedOtherHs

PS Data Service denied ratio. GPEH Event: Internal_System_Block,
Internal_Rab_Establishment

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherHs

Source Section

UtranCell

pmServiceDeniedOtherPacket

PS Data Service denied ratio. GPEH Event: Internal_System_Block,
Internal_Rab_Establishment

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherPacket

Source Section

UtranCell

pmServiceDeniedOtherPs64

Not in vendor doc. But in Sample file

Data Source

GPEH P4

Source Field

pmServiceDeniedOtherPs64

Source Section

UtranCell

pmServiceDeniedUIntCs57

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS57 RAB is denied by admission control due to uplink link Cell Congestion caused by too high uplink interference.

Data Source

GPEH P4

Source Field

pmServiceDeniedUIntCs57

Source Section

UtranCell

pmServiceDeniedUIntCs64

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS64 RAB is denied by admission control due to uplink link Cell Congestion caused by too high uplink interference.

Data Source

GPEH P4

Source Field

pmServiceDeniedUIntCs64

Source Section

UtranCell

pmServiceDeniedUIntCsSpeech

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS Speech RAB is denied by admission control due to uplink link Cell Congestion caused by too high uplink interference.

Data Source

GPEH P4

Source Field

pmServiceDeniedUIntCsSpeech

Source Section

UtranCell

pmServiceDeniedUIntHs

PS Data Service denied ratio. This counter is stepped when an establishment request for a HS RAB is denied by admission control due to uplink link Cell Congestion caused by too high uplink interference.

Data Source

GPEH P4

Source Field

pmServiceDeniedUllntHs

Source Section

UtranCell

pmServiceDeniedUllntPacket

PS Data Service denied ratio. This counter is stepped when an establishment request for a PS/HS RAB is denied by admission control due to uplink link Cell Congestion caused by too high uplink interference.

Data Source

GPEH P4

Source Field

pmServiceDeniedUllntPacket

Source Section

UtranCell

pmServiceDeniedUllntPs64

Not in vendor doc. But in Sample file

Data Source

GPEH P4

Source Field

pmServiceDeniedUllntPs64

Source Section

UtranCell

pmSuccNonBlindInterFreqHoCsConversational_RUP

Number of successful non-blind outgoing inter-frequency handovers for RAB = CS
Conversational except speech (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoCsConversational

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoCsSpeech12_RUP

Number of successful non-blind outgoing inter-frequency handovers for RAB = Conversational speech (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoCsSpeech12

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoPsInteractiveGreater64_RUP

Number of successful non-blind outgoing inter-frequency handovers for RAB = Interactive greater than 64 kbps (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoPsInteractiveGreater64

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoPsInteractiveLess64_RUP

Number of successful non-blind outgoing inter-frequency handovers for RAB = Interactive less than or equal to 64 kbps (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoPsInteractiveLess64

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoStreamingOther_RUP

Number of successful non-blind outgoing inter-frequency handovers for RAB = Streaming (roll up from UtranRelation)

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoStreamingOther

Source Section

UtranRelation

pmSumActDIRlcTotPacketThp

(Retired on P6)Aggregation of DL RLC throughput measurements (that is, incremented by the measured throughput amount, including user data, retransmissions, padding bits, data PDU headers and RLC control PDU's: pmSumActDIRlcTotPacketThp = pmSumActDIRlcTotP

Data Source

RNC

Source Field

pmSumActDIRlcTotPacketThp

Source Section

UtranCell

pmSumActDIRlcUserPacketThp

(Retired on P6)Aggregation of DL RLC throughput measurements (i.e. incremented by the measured RLC throughput amount, including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's: pmSumActDIRlcUserPacketThp

Source Field

pmSumActDIRlcUserPacketThp

Source Section

UtranCell

pmSumActUIRlcTotPacketThp

(Retired on P6)Aggregation of UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, including user data, retransmissions, padding bits, data PDU headers and RLC control PDU's: pmSumActUIRlcTotPacketThp = pmSumActUIRlc

Data Source

RNC

Source Field

pmSumActUIRlcTotPacketThp

Source Section

UtranCell

pmSumActUIRlcUserPacketThp

(Retired on P6)Aggregation of UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's: pmSumActUIRlcUserPacketThp =

Data Source

RNC

Source Field

pmSumActUIRlcUserPacketThp

Source Section

UtranCell

pmSumAmr12200RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR12200 RABs established'.

Data Source

RNC

Source Field

pmSumAmr12200RabEstablish

Source Section

UtranCell

pmSumAmr4750RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR4750 RABs established'.

Data Source

RNC

Source Field

pmSumAmr4750RabEstablish

Source Section

UtranCell

pmSumAmr5900RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR5900 RABs established'.

Data Source

RNC

Source Field

pmSumAmr5900RabEstablish

Source Section

UtranCell

pmSumAmr7950RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR7950 RABs established'.

Data Source

RNC

Source Field

pmSumAmr7950RabEstablish

Source Section

UtranCell

pmSumAmrWbRabEstablish

Sum of all sample values recorded within ROP period for 'Number of AMR-WB RABs established'.

Data Source

RNC

Source Field

pmSumAmrWbRabEstablish

Source Section

UtranCell

pmSumBestAmr12200RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR12200 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestAmr12200RabEstablish

Source Section

UtranCell

pmSumBestAmr4750RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR4750 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestAmr4750RabEstablish

Source Section

UtranCell

pmSumBestAmr5900RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR5900 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestAmr5900RabEstablish

Source Section

UtranCell

pmSumBestAmr7950RabEstablish

Sum of all sample values recorded within ROP period for 'Number of Speech AMR7950 RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestAmr7950RabEstablish

Source Section

UtranCell

pmSumBestAmrWbRabEstablish

Sum of all sample values recorded within ROP period for 'Number of AMR-WB RABs established' for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestAmrWbRabEstablish

Source Section

UtranCell

pmSumBestCs12Establish

Sum of all sample values recorded for 'number of distinct CS speech users', referred to the best cell in the Active Set

Data Source

NodeB_RNC_RXI

Source Field

pmSumBestCs12Establish

Source Section

UtranCell

pmSumBestCs12PsIntRabEstablish

Sum of all sample values recorded within the ROP period for 'Number of PS Interactive + Speech multi-RABs established, regardless of PS rate', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestCs12PsIntRabEstablish

Source Section

UtranCell

pmSumBestCs57RabEstablish

Sum of all sample values recorded within the ROP period for 'Number of streaming 57.6 kbit CS RABs established', for the best cell in the Active Set

Data Source

RNC

Source Field

pmSumBestCs57RabEstablish

Source Section

UtranCell

pmSumBestCs64PsIntRabEstablish

Sum of all sample values recorded within the ROP period for 'Number of PS Interactive + conversational 64 kbps CS multi- RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestCs64PsIntRabEstablish

Source Section

UtranCell

pmSumBestCs64RabEstablish

Sum of all sample values recorded within the ROP period for 'Number of conversational 64 kbit CS RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestCs64RabEstablish

Source Section

UtranCell

pmSumBestDchPsIntRabEstablish

Sum of all sample values recorded within the ROP period for 'Number of PS Interactive RABs established, regardless of rate', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestDchPsIntRabEstablish

Source Section

UtranCell

pmSumBestPsEulRabEstablish

Number of E-DCH radio bearers established in this cell when it is the best cell.

Data Source

RNC

Source Field

pmSumBestPsEulRabEstablish

Source Section

UtranCell

pmSumBestPsHsAdchRabEstablish

Sum of all sample values recorded for 'Number of PS

Data Source

RNC

Source Field

pmSumBestPsHsAdchRabEstablish

Source Section

UtranCell

pmSumBestPsStr128Ps8RabEstablish

Sum of all sample values recorded for 'Number of A-DCHs established in the cell which is the best cell in the active set' .

Data Source

RNC

Source Field

pmSumBestPsStr128Ps8RabEstablish

Source Section

UtranCell

pmSumBestPsStr64Ps8RabEstablish

Sum of all sample values recorded within the ROP period for Number of PS Streaming 16/64 + Packet 8kbps PS multiRABs established referred to the best cell in the AS'

Data Source

RNC

Source Field

pmSumBestPsStr64Ps8RabEstablish

Source Section

UtranCell

pmSumBestPsStreamHsRabEst

Sum of all sample values recorded within the ROP period for 'Number of PS Streaming HS RABs established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumBestPsStreamHsRabEst

Source Section

UtranCell

pmSumCompMode

Total Compressed mode users (sum of all sample values recorded).

Data Source

NodeB_RNC_RXI

Source Field

pmSumCompMode

Source Section

UtranCell

pmSumCs12Ps0RabEstablish

Sum of all sample values recorded for number of active speech CS plus 0/0 (UL/DL) PS multi RABs.

Data Source

NodeB_RNC_RXI

Source Field

pmSumCs12Ps0RabEstablish

Source Section

UtranCell

pmSumCs12Ps64RabEstablish

Sum of all sample values recorded for number of active speech CS plus 64/64 kbps PS multi RABs

Data Source

NodeB_RNC_RXI

Source Field

pmSumCs12Ps64RabEstablish

Source Section

UtranCell

pmSumCs12RabEstablish

Sum of all sample values recorded for number of active speech 12.2 kbps RABs

Data Source

NodeB_RNC_RXI

Source Field

pmSumCs12RabEstablish

Source Section

UtranCell

pmSumCs57RabEstablish

A snapshot of the total number of currently active CS 57 kbps RABs is recorded once every 30 seconds

Data Source

NodeB_RNC_RXI

Source Field

pmSumCs57RabEstablish

Source Section

UtranCell

pmSumCs64Ps8RabEstablish

This number of samples recorded in the ROP period for the multi RAB UDI+8/8

Data Source

RNC

Source Field

pmSumCs64Ps8RabEstablish

Source Section

UtranCell

pmSumCs64RabEstablish

A snapshot of the total number of currently active CS 64 kbps RABs is recorded once every 30 seconds.

Data Source

NodeB_RNC_RXI

Source Field

pmSumCs64RabEstablish

Source Section

UtranCell

pmSumDchDIRlcTotPacketThp

Aggregate of R99 DL RLC throughput measurements (i.e. incremented by the measured throughput amount, including retransmissions: $\text{pmSumDchDIRlcTotPacketThp} = \text{pmSumDchDIRlcTotPacketThp} + \text{throughput_measure}$).

Data Source

RNC

Source Field

pmSumDchDIRlcTotPacketThp

Source Section

UtranCell

pmSumDchDIRlcUserPacketThp

Aggregate of R99 DL RLC throughput measurements (i.e. incremented by the measured RLC throughput amount, excluding retransmissions: $\text{pmSumDchDIRlcUserPacketThp} = \text{pmSumDchDIRlcUserPacketThp} + \text{throughput_measure}$).

Data Source

RNC

Source Field

pmSumDchDIRlcUserPacketThp

Source Section

UtranCell

pmSumDchUIRlcTotPacketThp

Aggregate of R99 UL RLC throughput measurements (i.e. incremented by the measured RLC throughput amount, including retransmissions: pmSumDchUIRlcTotPacketThp = pmSumDchUIRlcTotPacketThp + throughput_measure).

Data Source

RNC

Source Field

pmSumDchUIRlcTotPacketThp

Source Section

UtranCell

pmSumDchUIRlcUserPacketThp

Aggregate of R99 UL RLC throughput measurements (i.e. incremented by the measured RLC throughput amount, excluding retransmissions: pmSumDchUIRlcUserPacketThp = pmSumDchUIRlcUserPacketThp + throughput_measure).

Data Source

RNC

Source Field

pmSumDchUIRlcUserPacketThp

Source Section

UtranCell

pmSumDlCode

Aggregate of DL Channelization code tree usage (percentage of lowest leaf, SF 256, usage: blocked or allocated) measurements.

Data Source

RNC

Source Field

pmSumDlCode

Source Section

UtranCell

pmSumDIRlcUserThpPsStream128

Aggregate of DL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions, padding bits, data PDU headers and RLC control messages). Not incremented when data volume = 0. Used to calculate the DL RLC throughput for Streaming PS 128 kbps DCH. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmSumDIRlcUserThpPsStream128

Source Section

UtranCell

pmSumDIRlcUserThpPsStream64

Aggregate of DL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions, padding bits, data PDU headers and RLC control messages). Not incremented when data volume = 0. Used to calculate the DL RLC throughput for Streaming PS 64 kbps DCH. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmSumDIRlcUserThpPsStream64

Source Section

UtranCell

pmSumDIRlcUserThpPsStreamHs

Aggregate of DL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions and RLC control messages). Not incremented when data volume = 0. Used to calculate the downlink RLC throughput for Streaming PS HSDPA. Measured in the HS serving cell in kbit/s

Data Source

RNC

Source Field

pmSumDIRlcUserThpPsStreamHs

Source Section

UtranCell

pmSumEulRlcTotPacketThp

Aggregate of EUL UL RLC throughput measurements (that is, incremented by the measured EUL RLC throughput amount including retransmissions: pmSumEulRlcTotPacketThp = pmSumEulRlcTotPacketThp + throughput_measure). Reported on the best cell in the active set

Data Source

RNC

Source Field

pmSumEulRlcTotPacketThp

Source Section

Eul

pmSumEulRlcUserPacketThp

Aggregate of EUL UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions: pmSumEulRlcUserPacketThp = pmSumEulRlcUserPacketThp + throughput_measure). Reported on the best cell in the active set.

Data Source

RNC

Source Field

pmSumEulRlcUserPacketThp

Source Section

Eul

pmSumFachPsIntRabEstablish

Sum of all sample values recorded within the ROP period for 'Number of PS RABs in state FACH established', for the best cell in the Active Set.

Data Source

RNC

Source Field

pmSumFachPsIntRabEstablish

Source Section

UtranCell

pmSumHsDIRlcTotPacketThp

Aggregate of HS-DSCH DL RLC throughput measurements (that is, incremented by the measured throughput amount, including retransmissions: $\text{pmSumHsDIRlcTotPacketThp} = \text{pmSumHsDIRlcTotPacketThp} + \text{throughput_measure}$). Reported on the HS-DSCH cell.

Data Source

RNC

Source Field

pmSumHsDIRlcTotPacketThp

Source Section

HsdSCH

pmSumHsDIRlcUserPacketThp

Aggregate of HS-DSCH DL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions: $\text{pmSumHsDIRlcUserPacketThp} = \text{pmSumHsDIRlcUserPacketThp} + \text{throughput_measure}$). Reported on the HS-DSCH cell

Data Source

RNC

Source Field

pmSumHsDIRlcUserPacketThp

Source Section

HsdSCH

pmSumOfSampAseDL

Total ASE downlink (sum of all sample values recorded).

Data Source

NodeB_RNC_RXI

Source Field

pmSumOfSampAseDL

Source Section

UtranCell

pmSumOfSampAseUL

(Updated Source Field/Section on RP12)Total ASE UL (sum of all sample values recorded)

Source Field

pmSumOfSampAseUL

Source Section

UtranCell

pmSumOfTimesMeasOldI

Number of times Congestion Control is triggered due to high downlink power.

Data Source

NodeB_RNC_RXI

Source Field

pmSumOfTimesMeasOldI

Source Section

UtranCell

pmSumOfTimesMeasOlUI

Number of times Congestion Control is triggered due to high UL interference

Data Source

NodeB_RNC_RXI

Source Field

pmSumOfTimesMeasOIUI

Source Section

UtranCell

pmSumPacketDlDelay_0

Aggregate of the RAN SDU PS interactive packet delay with respect to the best cell in the active set

Data Source

RNC

Source Field

pmSumPacketDlDelay

Source Section

UtranCell

pmSumPacketDlDelay_1

Aggregate of the RAN SDU PS interactive packet delay with respect to the best cell in the active set

Data Source

RNC

Source Field

pmSumPacketDlDelay

Source Section

UtranCell

pmSumPacketDlDelay_2

Aggregate of the RAN SDU PS interactive packet delay with respect to the best cell in the active set

Data Source

RNC

Source Field

pmSumPacketDlDelay

Source Section

UtranCell

pmSumPacketLatency_0

Aggregate of the RAN SDU PS interactive packet latency with respect to the best cell in the active set.

Data Source

RNC

Source Field

pmSumPacketLatency

Source Section

UtranCell

pmSumPacketLatency_1

Aggregate of the RAN SDU PS interactive packet latency with respect to the best cell in the active set.

Data Source

RNC

Source Field

pmSumPacketLatency

Source Section

UtranCell

pmSumPacketLatency_2

Aggregate of the RAN SDU PS interactive packet latency with respect to the best cell in the active set.

Data Source

RNC

Source Field

pmSumPacketLatency

Source Section

UtranCell

pmSumPacketLatencyPsStreamHs_0

Aggregate of the RAN SDU PS Streaming HS packet latency with respect to the best cell.

Data Source

RNC

Source Field

pmSumPacketLatencyPsStreamHs

Source Section

UtranCell

pmSumPacketLatencyPsStreamHs_1

Aggregate of the RAN SDU PS Streaming HS packet latency with respect to the best cell.

Data Source

RNC

Source Field

pmSumPacketLatencyPsStreamHs

Source Section

UtranCell

pmSumPacketLatencyPsStreamHs_2

Aggregate of the RAN SDU PS Streaming HS packet latency with respect to the best cell.

Data Source

RNC

Source Field

pmSumPacketLatencyPsStreamHs

Source Section

UtranCell

pmSumPs128RabEstablish

Sum of all sample values recorded for number of 128 kbps PS RABs established

Data Source

NodeB_RNC_RXI

Source Field

pmSumPs128RabEstablish

Source Section

UtranCell

pmSumPs384RabEstablish

Sum of all sample values recorded for number of 384 kbps PS RABs established

Data Source

NodeB_RNC_RXI

Source Field

pmSumPs384RabEstablish

Source Section

UtranCell

pmSumPs64RabEstablish

Sum of all sample values recorded for number of active PS64 kbps RABs

Data Source

NodeB_RNC_RXI

Source Field

pmSumPs64RabEstablish

Source Section

UtranCell

pmSumPsEulRabEstablish

Number of E-DCH radio bearers established in this cell.

Data Source

RNC

Source Field

pmSumPsEulRabEstablish

Source Section

UtranCell

pmSumPsHsAdchRabEstablish

Sum of all sample values recorded for 'Number of A-DCHs established'.

Data Source

RNC

Source Field

pmSumPsHsAdchRabEstablish

Source Section

UtranCell

pmSumPsInteractive

Sum of all sample values recorded for 'Number of Interactive PS RABs established excluding RABs on HS configurations or CELL_FACH'.

Data Source

RNC

Source Field

pmSumPsInteractive

Source Section

UtranCell

pmSumPsStr128Ps8RabEstablish

Sum of all sample values recorded for 'Number of PS Streaming 16/128 + Packet 8kbps PS multi-RABs established'.

Data Source

RNC

Source Field

pmSumPsStr128Ps8RabEstablish

Source Section

UtranCell

pmSumPsStr64Ps8RabEstablish

A snapshot of the total number of currently active PS Streaming + PS8 multi RABs is recorded once every 30 seconds. This counter contains the sum of all the snapshot values taken in a ROP period added together.

Data Source

NodeB_RNC_RXI

Source Field

pmSumPsStr64Ps8RabEstablish

Source Section

UtranCell

pmSumPsStreamHsRabEst

Sum of all sample values recorded within the ROP period for 'Number of PS Streaming HS RABs established'.

Data Source

RNC

Source Field

pmSumPsStreamHsRabEst

Source Section

UtranCell

pmSumRabFach

(Retired on P6)Sum of all sample values recorded for the number of RABs per FACH channel.

Data Source

NodeB_RNC_RXI

Source Field

pmSumRabFach

Source Section

UtranCell

pmSumRrcOnlyEstablish

A snapshot of the total number of currently active RRC only connection is recorded once every 30 seconds.

Data Source

NodeB_RNC_RXI

Source Field

pmSumRrcOnlyEstablish

Source Section

UtranCell

pmSumSf4Ul

Sum of the sampled amount of radio links that are on Spreading Factor (SF) = 4 (384 kbps) in UL in a cell during a ROP period

Data Source

RNC

Source Field

pmSumSf4Ul

Source Section

UtranCell

pmSumSqrDlCode

Aggregate of the squares of the individual measurements in pmSumDlCode (that is, $\text{pmSumSqrDlCode} = \text{pmSumDlCode} + \text{measurement_value}^2$).

Data Source

RNC

Source Field

pmSumSqrDlCode

Source Section

UtranCell

pmSumSqrUlrssi

Aggregate of the squares of the individual measurements in pmSumUlrssi (that is, $\text{pmSumSqrUlrssi} = \text{pmSumUlrssi} + \text{measurement_value}^2$).

Data Source

RNC

Source Field

pmSumSqrUlrssi

Source Section

UtranCell

pmSumUesWith1Rls1RlInActSet

Sum sample values rec for number of Ues one RL set & one RL active

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith1Rls1RlInActSet

Source Section

UtranCell

pmSumUesWith1Rls2RlInActSet

Sum sample values rec for number of UEs with one RL set & two RL in the active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith1Rls2RlInActSet

Source Section

UtranCell

pmSumUesWith1Rls3RlInActSet

Sum sample values rec for number UEs with one RL set & three or more RLs active set

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith1Rls3RlInActSet

Source Section

UtranCell

pmSumUesWith2Rls2RlInActSet

Sum sample value rec for number UEs with two RL sets & two RLs in active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith2Rls2RlInActSet

Source Section

UtranCell

pmSumUesWith2Rls3RlInActSet

Sum sample values rec for number UEs with two RL sets & three RLs in the active set

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith2Rls3RlInActSet

Source Section

UtranCell

pmSumUesWith2Rls4RlInActSet

Sum sample values rec for number UEs with two RL sets & four RLs in the active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith2Rls4RlInActSet

Source Section

UtranCell

pmSumUesWith3Rls3RlInActSet

Sum sample values rec for number of UEs with three RL sets & three RLs active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith3Rls3RlInActSet

Source Section

UtranCell

pmSumUesWith3Rls4RlInActSet

Sum sample values rec number UEs with three RL sets & four RLs active set.

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith3Rls4RlInActSet

Source Section

UtranCell

pmSumUesWith4Rls4RlInActSet

Sum sample values rec number UEs with four RL set (only one RL possible per RL set)

Data Source

NodeB_RNC_RXI

Source Field

pmSumUesWith4Rls4RlInActSet

Source Section

UtranCell

pmSumUIRlcUserThpPsStream128

Aggregate of UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions and RLC control messages). Not incremented when data volume = 0. Used to calculate the uplink RLC throughput for Streaming PS 128 kbps DCH. Measured on the best cell in the active set in kbit/s.

Data Source

RNC

Source Field

pmSumUIRlcUserThpPsStream128

Source Section

UtranCell

pmSumUIRlcUserThpPsStream16

Aggregate of UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions, padding bits, data PDU headers, and RLC

control messages). Not incremented when data volume = 0. Used to calculate the UL RLC throughput for Streaming PS 16 kbps DCH. Measured only in SRNC, on the best cell in the active set.

Data Source

RNC

Source Field

pmSumUIRlcUserThpPsStream16

Source Section

UtranCell

pmSumUIRlcUserThpPsStream32

Aggregate of UL RLC throughput measurements (that is, incremented by the measured RLC throughput amount, excluding retransmissions and RLC control messages). Not incremented when data volume = 0. Used to calculate the uplink RLC throughput for Streaming PS 32 kbps DCH. Measured on the best cell in the active set in kbit/s.

Data Source

RNC

Source Field

pmSumUIRlcUserThpPsStream32

Source Section

UtranCell

pmSumUIRssi

Sum of valid RTWP values as received in NBAP Common Measurement Reports. RTWP range: 0-621 (corresponding to -112 ... -50dB). RTWP (Received Total Wideband Power) is a measurement of uplink RSSI and is defined in 3GPP TS 25.433 (NBAP).

Data Source

RNC

Source Field

pmSumUIRssi

Source Section

UtranCell

pmSystemRabReleaseIfhoCs

CS Call drop, during IFHO. Step counter when the initial radio configuration contains a CS RAB and the final RAB configuration does not contain a CS RAB AND the release occurs during Inter-Frequency Handover.

Data Source

GPEH P4

Source Field

pmSystemRabReleaseIfhoCs

Source Section

UtranCell

pmSystemRabReleaseIfhoPs

PS Call drop, during IFHO. Step counter when the initial radio configuration contains a PS RAB and the final RAB configuration does not contain a PS RAB AND the release occurs during Inter-Frequency Handover.

Data Source

GPEH P4

Source Field

pmSystemRabReleaseIfhoPs

Source Section

UtranCell

pmSystemRabReleaseIratCs

CS Call drop, during IRAT. Step counter when the initial radio configuration contains a CS RAB and the final RAB configuration does not contain a CS RAB AND the release occurs during Inter-RAT Handover.

Data Source

GPEH P4

Source Field

pmSystemRabReleaseIratCs

Source Section

UtranCell

pmSystemRabReleaseIratPs

PS Call drop, during IRAT. Step counter when the initial radio configuration contains a PS RAB and the final RAB configuration does not contain a PS RAB AND the release occurs during Inter-RAT Handover.

Data Source

GPEH P4

Source Field

pmSystemRabReleaseIratPs

Source Section

UtranCell

pmTotalTimeDlCellCong

The total amount of time (sec) a cell was congested in DL during a reporting period.

pmTotalTimeHsdSCHOverload

The total amount of time (sec) a cell was HS-DSCH overloaded.

Data Source

RNC

Source Field

pmTotalTimeHsdSCHOverload

Source Section

UtranCell

pmTotalTimeUlCellCong

The total amount of time (sec) a cell was congested in UL during a reporting period.

pmTotNoRrcConnectAttIratCcOrder

Tot Number RRC connect establishment att with estabt cause "Inter-RAT cell change order"

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectAttIratCcOrder

Source Section

UtranCell

pmTotNoRrcConnectAttIratCellResel

Tot Number RRC connection establishment att with estabt cause "Inter-RAT cell reselection"

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectAttIratCellResel

Source Section

UtranCell

pmTotNoRrcConnectFailCongIratCcOrder

Number of unsucc RRC Connection establishments with estcause Inter-RAT cell change order, which failed due to congestion

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectFailCongIratCcOrder

Source Section

UtranCell

pmTotNoRrcConnectFailCongIratCellResel

Number of unsucc RRC Connection establishments with est cause Inter-RAT cell reselection, which failed due to congestion

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectFailCongIratCellResel

Source Section

UtranCell

pmTotNoRrcConnectReq

Total number of RRC connection requests.

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReq

Source Section

UtranCell

pmTotNoRrcConnectReqCs

Total number of Conversational Call (originating and terminating) RRC connection attempts

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqCs

Source Section

UtranCell

pmTotNoRrcConnectReqCsSucc

Total number of Successful Conversational Call (originating and terminating) RRC connection attempts

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqCsSucc

Source Section

UtranCell

pmTotNoRrcConnectReqDetach

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Detach.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqDetach

Source Section

UtranCell

pmTotNoRrcConnectReqEmergency

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Emergency Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqEmergency

Source Section

UtranCell

pmTotNoRrcConnectReqOrigBackgrd

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Background Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigBackgrd

Source Section

UtranCell

pmTotNoRrcConnectReqOrigConv

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Conversational Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigConv

Source Section

UtranCell

pmTotNoRrcConnectReqOrigHigh

This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating High Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigHigh

Source Section

UtranCell

pmTotNoRrcConnectReqOrigInt

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Interactive Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigInt

Source Section

UtranCell

pmTotNoRrcConnectReqOrigLow

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Low Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigLow

Source Section

UtranCell

pmTotNoRrcConnectReqOrigStream

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Streaming Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigStream

Source Section

UtranCell

pmTotNoRrcConnectReqOrigSub

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Originating Subscribed traffic Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqOrigSub

Source Section

UtranCell

pmTotNoRrcConnectReqPs

Total number of Interactive and Background (originating and terminating) RRC connection attempts

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqPs

Source Section

UtranCell

pmTotNoRrcConnectReqPsSucc

Total number of Successful Interactive and Background (originating and terminating) RRC connection attempts

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqPsSucc

Source Section

UtranCell

pmTotNoRrcConnectReqReEst

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Call re-establishment.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqReEst

Source Section

UtranCell

pmTotNoRrcConnectReqRegister

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Registration.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqRegister

Source Section

UtranCell

pmTotNoRrcConnectReqSms

Total number of RRC connection requests with establishment cause=low priority.

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqSms

Source Section

UtranCell

pmTotNoRrcConnectReqSuccess

Total number of successful RRC connection requests.

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectReqSuccess

Source Section

UtranCell

pmTotNoRrcConnectReqTermBackgrd

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating Background Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermBackgrd

Source Section

UtranCell

pmTotNoRrcConnectReqTermConv

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating Conversational Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermConv

Source Section

UtranCell

pmTotNoRrcConnectReqTermHigh

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating High Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermHigh

Source Section

UtranCell

pmTotNoRrcConnectReqTermInt

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating Interactive Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermInt

Source Section

UtranCell

pmTotNoRrcConnectReqTermLow

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating Low Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermLow

Source Section

UtranCell

pmTotNoRrcConnectReqTermStream

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause = Terminating Streaming Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermStream

Source Section

UtranCell

pmTotNoRrcConnectReqTermUnknown

RRC establishment success rate. This counter is stepped when the RRC Connection Request message is received with Establishment Cause Terminating cause unknown

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectReqTermUnknown

Source Section

UtranCell

pmTotNoRrcConnectSuccDetach

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Detach.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccDetach

Source Section

UtranCell

pmTotNoRrcConnectSuccEmergency

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Emergency Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccEmergency

Source Section

UtranCell

pmTotNoRrcConnectSuccessIratCcOrder

Number Succ RRC Connection establishment with estabt cause "Inter-RAT cell change order"

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectSuccessIratCcOrder

Source Section

UtranCell

pmTotNoRrcConnectSuccessIratCellResel

Number Succ RRC connection establishment with estabt cause "Inter-RAT cell reselection"

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoRrcConnectSuccessIratCellResel

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigBackgrd

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Background Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigBackgrd

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigConv

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Conversational Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigConv

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigHigh

This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating High Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigHigh

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigInt

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Interactive Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigInt

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigLow

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Low Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigLow

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigStream

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Streaming Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigStream

Source Section

UtranCell

pmTotNoRrcConnectSuccOrigSub

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Originating Subscribed traffic Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccOrigSub

Source Section

UtranCell

pmTotNoRrcConnectSuccReEst

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Call re-establishment.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccReEst

Source Section

UtranCell

pmTotNoRrcConnectSuccRegister

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Registration.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccRegister

Source Section

UtranCell

pmTotNoRrcConnectSuccTermBackgrd

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating Background Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermBackgrd

Source Section

UtranCell

pmTotNoRrcConnectSuccTermConv

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating Conversational Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermConv

Source Section

UtranCell

pmTotNoRrcConnectSuccTermHigh

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating High Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermHigh

Source Section

UtranCell

pmTotNoRrcConnectSuccTermInt

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating Interactive Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermInt

Source Section

UtranCell

pmTotNoRrcConnectSuccTermLow

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating Low Priority Signalling.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermLow

Source Section

UtranCell

pmTotNoRrcConnectSuccTermStream

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause = Terminating Streaming Call.

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermStream

Source Section

UtranCell

pmTotNoRrcConnectSuccTermUnknown

RRC establishment success rate. This counter is stepped when an RRC Connection Setup Complete message is received and has been preceded by an RRC Connection Request message with Establishment Cause Terminating cause unknown

Data Source

GPEH P5ED

Source Field

pmTotNoRrcConnectSuccTermUnknown

Source Section

UtranCell

pmTotNoTermRrcConnectReq

Number of mobile terminating RRC connection attempts

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReq

Source Section

UtranCell

pmTotNoTermRrcConnectReqCs

Number of mobile terminating conversational RRC connection attempts.

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReqCs

Source Section

UtranCell

pmTotNoTermRrcConnectReqCsSucc

Number of successful mobile terminating conversational RRC connections.

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReqCsSucc

Source Section

UtranCell

pmTotNoTermRrcConnectReqPs

Number of mobile terminating Interactive & Background RRC connection attempts.

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReqPs

Source Section

UtranCell

pmTotNoTermRrcConnectReqPsSucc

Number of successful mobile terminating Interactive & Background RRC connections.

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReqPsSucc

Source Section

UtranCell

pmTotNoTermRrcConnectReqSucc

Number of successful mobile terminating RRC connections.

Data Source

RNC

Source Field

pmTotNoTermRrcConnectReqSucc

Source Section

UtranCell

pmTotNoUtranRejRrcConnReq

Total number of UTRAN-rejected RRC connection requests.

Data Source

NodeB_RNC_RXI

Source Field

pmTotNoUtranRejRrcConnReq

Source Section

UtranCell

pmTotRabEstSuccess

RAB Setup Success on Ranap Traffic Class. Traffic class: 1-streaming, 2-interactive, 3-background

Data Source

GPEH P5MD

Source Field

pmTotRabEstSuccess

Source Section

UtranCell

pmTotServiceDeniedCs57

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS57 RAB is denied due to admission control for any reason.

Data Source

GPEH P4

Source Field

pmTotServiceDeniedCs57

Source Section

UtranCell

pmTotServiceDeniedCs64

CS Data Service denied ratio. This counter is stepped when an establishment request for a CS64 RAB is denied due to admission control for any reason.

Data Source

GPEH P4

Source Field

pmTotServiceDeniedCs64

Source Section

UtranCell

pmTotServiceDeniedCsSpeech

CS Speech Service denied. This counter is stepped when an establishment request for a CS Speech RAB is denied due to admission control for any reason.

Data Source

GPEH P4

Source Field

pmTotServiceDeniedCsSpeech

Source Section

UtranCell

pmTotServiceDeniedHs

PS Data Service denied ratio. This counter is stepped when an establishment request for a HS RAB is denied due to admission control for any reason.

Data Source

GPEH P4

Source Field

pmTotServiceDeniedHs

Source Section

UtranCell

pmTotServiceDeniedPacket

PS Data Service denied ratio. This counter is stepped when an establishment request for a PS/HS RAB is denied due to admission control for any reason.

Data Source

GPEH P4

Source Field

pmTotServiceDeniedPacket

Source Section

UtranCell

pmTotServiceDeniedPs64

Not in vendor doc. But in Sample file

Data Source

GPEH P4

Source Field

pmTotServiceDeniedPs64

Source Section

UtranCell

pmTransportBlocksBcUl

Total number of uplink DCH transport blocks before combining.

Data Source

NodeB_RNC_RXI

Source Field

pmTransportBlocksBcUl

Source Section

UtranCell

pmTrChnlReconfigAttempt

RRC Transport Channel Reconfiguration Attempt

Data Source

GPEH P5MD

Source Field

pmTrChnlReconfigAttempt

Source Section

UtranCell

pmTrChnlReconfigSuccess

RRC Transport Channel Reconfiguration Success

Data Source

GPEH P5MD

Source Field

pmTrChnlReconfigSuccess

Source Section

UtranCell

pmUIRlcUserPacketThp_0_5

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [0..5) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_100_120

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [100..120) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_120_140

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU in the area [120..140) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_140_160

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [140..160) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_160_180

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [160..180) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_180_200

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [180..200) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_20_40

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [20..40) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_200_220

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [200..220) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_220_240

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [220..240) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_240_260

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [240..260) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_260_280

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [260..280) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_280_300

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [280..300) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_300_320

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [300..320) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_320_340

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's in the area [320..340) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_340_360

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [340..360) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_360_more

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area => 360 Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_40_60

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [40..60) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_5_20

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU’s.in the area [5..20) Kbits per second

pmUIRlcUserPacketThp_60_80

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's.in the area [60..80) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThp_80_100

(Retired on P6)The UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's.in the area [80..100) Kbits per second

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_19

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $360 \leq x < 380$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_20

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $380 \leq x < 400$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_21

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $400 \leq x < 500$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_22

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $500 \leq x < 600$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_23

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $600 \leq x < 700$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_24

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $700 \leq x < 800$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_25

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $800 \leq x < 900$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_26

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $900 \leq x < 1000$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_27

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1000 \leq x < 1250$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_28

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $1250 \leq x < 1500$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUIRlcUserPacketThpP5MD_29

(Retired on P6)UL RLC throughput (user data), including user data but excluding retransmissions, padding bits, data PDU headers and RLC control PDU's. Measured every polling_time duration. Number of samples in the range $x \geq 1500$ kbps

Data Source

RNC

Source Field

pmUIRlcUserPacketThp

Source Section

UtranCell

pmUITrafficVolumeAmr4750

Payload traffic on UL in kbits for speech AMR4750 RAB before macro diversity.

Data Source

RNC

Source Field

pmUITrafficVolumeAmr4750

Source Section

UtranCell

pmUITrafficVolumeAmr5900

Payload traffic on UL in kbits for speech AMR5900 RAB before macro diversity.

Data Source

RNC

Source Field

pmUITrafficVolumeAmr5900

Source Section

UtranCell

pmUITrafficVolumeAmr7950

Payload traffic on UL in kbits for speech AMR7950 RAB before macro diversity.

Data Source

RNC

Source Field

pmUITrafficVolumeAmr7950

Source Section

UtranCell

pmUITrafficVolumeAmrWb

Monitor the payload traffic on Uplink in kb for conversational/speech AMR-WB RAB before macro diversity. Payload includes user data, Medium Access Control (MAC) and Radio Link Control (RLC) header information, and retransmissions are also counted as part of the traffic volume.

Data Source

RNC

Source Field

pmUITrafficVolumeAmrWb

Source Section

UtranCell

pmUITrafficVolumeCs12

Payload traffic on uplink in kbits for conversational/speech 12.2 kbps Circuit Switched RAB before macro diversity

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumeCs12

Source Section

UtranCell

pmUITrafficVolumeCs12Ps0

Payload traffic on UL in kbits for speech 12.2 kbps CS and PS 0/0 kbps multi RAB before macro diversity. - Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumeCs12Ps0

Source Section

UtranCell

pmUITrafficVolumeCs12Ps64

Payload traffic on UL in kbits for speech 12.2 kbps CS and PS 64/64 kbps multi RAB before macro diversity. - Retired fr 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumeCs12Ps64

Source Section

UtranCell

pmUITrafficVolumeCs57

Payload traffic on uplink in kbits for streaming 57.6 kbps Circuit Switched RAB before macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumeCs57

Source Section

UtranCell

pmUITrafficVolumeCs64

Payload traffic on uplink in kbits for conversational 64 kbps Circuit Switched RAB before macro diversity.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumeCs64

Source Section

UtranCell

pmUITrafficVolumeCs64Ps8

Payload traffic on Uplink in Kbits on Dedicated Channel.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmUITrafficVolumeCs64Ps8

Source Section

UtranCell

pmUITrafficVolumePs128

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carries an Interactive UL Trch with max rate equal to 128 kbit/s. Only PS Interactive traffic is included.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumePs128

Source Section

UtranCell

pmUITrafficVolumePs16

Payload traffic, including retransmissions, on Uplink (UL) in Kb for Interactive PS 16 kbps (DCH/DCH or DCH/HS) RAB before macro diversity. Payload includes user data, Medium Access Control (MAC), and Radio Link Control (RLC) header information.

Data Source

RNC

Source Field

pmUITrafficVolumePs16

Source Section

UtranCell

pmUITrafficVolumePs384

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carries an Interactive UL Trch with max rate equal to 384 kbit/s. Only PS Interactive traffic is included.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumePs384

Source Section

UtranCell

pmUITrafficVolumePs64

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carries an Interactive UL Trch with max rate equal to 64 kbit/s. Only PS Interactive traffic is included.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumePs64

Source Section

UtranCell

pmUITrafficVolumePs8

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carry an Interactive UL TrCH with a maximum bit rate equal to 8 kbit/s. Only the PS Interactive part of the traffic volume is measured.

Data Source

RNC

Source Field

pmUITrafficVolumePs8

Source Section

UtranCell

pmUITrafficVolumePsCommon

Payload traffic on UL in kbits for PS RAB on FACH/RACH. Retransmissions are also counted as part of the traffic volume.

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumePsCommon

Source Section

UtranCell

pmUITrafficVolumePsIntEul

Payload traffic (kbits) in UL UeRc configurations on E-DCH . Only Interact. PS traffic is included.

Data Source

RNC

Source Field

pmUITrafficVolumePsIntEul

Source Section

UtranCell

pmUITrafficVolumePsStr128

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carry a Streaming UL TrCH with a maximum bit rate equal to 128 kbit/s. Only the PS Streaming part of the traffic volume is measured.

Data Source

RNC

Source Field

pmUITrafficVolumePsStr128

Source Section

UtranCell

pmUITrafficVolumePsStr128Ps8

Payload traffic on UL in kbits for PS Streaming 16/128 + Packet 8kbps RABs after macro diversity.- Retired fr 5.0.11.0.0

Data Source

RNC

Source Field

pmUITrafficVolumePsStr128Ps8

Source Section

UtranCell

pmUITrafficVolumePsStr16

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carry a Streaming UL TrCH with a maximum bit rate equal to 16 kbit/s. Only the PS Streaming part of the traffic volume is measured.

Data Source

RNC

Source Field

pmUITrafficVolumePsStr16

Source Section

UtranCell

pmUITrafficVolumePsStr32

Payload traffic (kbits) in UL before macro diversity for UeRc configurations which carries an Streaming PS UL Trch on 32 kbit/s DCH. Only PS Streaming traffic is included.

Data Source

RNC

Source Field

pmUITrafficVolumePsStr32

Source Section

UtranCell

pmUITrafficVolumePsStr64Ps8

Payload traffic on UL in Kb for streaming 16/64 PS kbps and interactive/background 8/8 PS multi RAB before macrodiversity. Payload traffic includes user data, MAC and RLC header information, and retransmissions are also counted as part of the traffic volume. Retired for 5.0.11.0.0

Data Source

NodeB_RNC_RXI

Source Field

pmUITrafficVolumePsStr64Ps8

Source Section

UtranCell

pmUIUpswitchAttemptEul

Number of attempted up-switches, triggered by UI user activity, to a target RB combination E-DCH/HSDPA. Stepped for the target cell.

Data Source

RNC

Source Field

pmUIUpswitchAttemptEul

Source Section

UtranCell

pmUIUpswitchAttemptHigh

Number of UL upswitch attempts to TrCH with UL rate \geq 256 kbit/s.

Data Source

RNC

Source Field

pmUIUpswitchAttemptHigh

Source Section

UtranCell

pmUIUpswitchAttemptLow

Number of UL upswitch attempts to TrCH with UL rate \leq 64 kbit/s (inc. FACH).

Data Source

RNC

Source Field

pmUIUpswitchAttemptLow

Source Section

UtranCell

pmUIUpswitchAttemptMedium

Number of UL upswitch attempts to TrCh with 64 Kbit/s < UL rate < 256 Kbit/s.

Data Source

RNC

Source Field

pmUIUpswitchAttemptMedium

Source Section

UtranCell

pmUIUpswitchSuccessEul

Number of successful up-switches, triggered by UI user activity, to a target RB combination E-DCH/HSDPA. Stepped for the target cell.

Data Source

RNC

Source Field

pmUIUpswitchSuccessEul

Source Section

UtranCell

pmUIUpswitchSuccessHigh

Number of successful UL upswitches to TrCh with UL rate \geq 256 kbit/s.

Data Source

RNC

Source Field

pmUIUpswitchSuccessHigh

Source Section

UtranCell

pmUIUpswitchSuccessLow

Number of successful UL upswitches to TrCh with UL rate ≤ 64 kbit/s (inc. FACH).

Data Source

RNC

Source Field

pmUIUpswitchSuccessLow

Source Section

UtranCell

pmUIUpswitchSuccessMedium

Number of successful UL upswitches to TrCh with $64 \text{ Kbit/s} < \text{UL rate} < 256 \text{ Kbit/s}$.

Data Source

RNC

Source Field

pmUIUpswitchSuccessMedium

Source Section

UtranCell

pmUpswitchFachHsAttempt

Number of upswitch attempts from FACH to any HS state.

Data Source

RNC

Source Field

pmUpswitchFachHsAttempt

Source Section

UtranCell

pmUpswitchFachHsSuccess

Number of successful upswitches from FACH to any HS state.

Data Source

RNC

Source Field

pmUpswitchFachHsSuccess

Source Section

UtranCell

pmUtranRabReleaseDlIntCs64

CS Video Telephony Drop rate - UTRAN initiated abnormal releases due to DL interference

Data Source

GPEH P4

Source Field

pmUtranRabReleaseDlIntCs64

Source Section

UtranCell

pmUtranRabReleaseDlIntCsSpeech

CS Speech Drop rate - UTRAN initiated abnormal releases due to DL interference

Data Source

GPEH P4

Source Field

pmUtranRabReleaseDlIntCsSpeech

Source Section

UtranCell

pmUtranRabReleaseDlIntHs

HS Drop rate - UTRAN initiated abnormal releases due to DL interference

Data Source

GPEH P4

Source Field

pmUtranRabReleaseDlIntHs

Source Section

UtranCell

pmUtranRabReleaseDlIntPacket

PS Drop rate - UTRAN initiated abnormal releases due to DL interference

Data Source

GPEH P4

Source Field

pmUtranRabReleaseDlIntPacket

Source Section

UtranCell

pmUtranRabReleaseOtherCs64

CS Video Telephony Drop rate - UTRAN initiated abnormal releases due to Other Reasons

Data Source

GPEH P4

Source Field

pmUtranRabReleaseOtherCs64

Source Section

UtranCell

pmUtranRabReleaseOtherCsSpeech

CS Speech Drop rate - UTRAN initiated abnormal releases due to Other Reasons

Data Source

GPEH P4

Source Field

pmUtranRabReleaseOtherCsSpeech

Source Section

UtranCell

pmUtranRabReleaseOtherHs

HS Drop rate- UTRAN initiated abnormal releases due to Other Reasons

Data Source

GPEH P4

Source Field

pmUtranRabReleaseOtherHs

Source Section

UtranCell

pmUtranRabReleaseOtherPacket

PS Drop rate- UTRAN initiated abnormal releases due to Other Reasons

Data Source

GPEH P4

Source Field

pmUtranRabReleaseOtherPacket

Source Section

UtranCell

pmUtranRabReleaseRIFailCs64

CS Video Telephony Drop rate - UTRAN initiated abnormal releases due to radiolink failure

Data Source

GPEH P4

Source Field

pmUtranRabReleaseRIFailCs64

Source Section

UtranCell

pmUtranRabReleaseRIFailCsSpeech

CS Speech Drop rate - UTRAN initiated abnormal releases due to radiolink failure.

Data Source

GPEH P4

Source Field

pmUtranRabReleaseRIFailCsSpeech

Source Section

UtranCell

pmUtranRabReleaseRIFailHs

HS Drop rate - UTRAN initiated abnormal releases due to radiolink failure

Data Source

GPEH P4

Source Field

pmUtranRabReleaseRIFailHs

Source Section

UtranCell

pmUtranRabReleaseRIFailPacket

PS Drop rate - UTRAN initiated abnormal releases due to radiolink failure

Data Source

GPEH P4

Source Field

pmUtranRabReleaseRIFailPacket

Source Section

UtranCell

pmUtranRabReleaseUIntCs64

CS Video Telephony Drop rate - UTRAN initiated abnormal releases due to UL interference

Data Source

GPEH P5ED

Source Field

pmUtranRabReleaseUIntCs64

Source Section

UtranCell

pmUtranRabReleaseUIntCsSpeech

CS Speech Drop rate - UTRAN initiated abnormal releases due to UL interference

Data Source

GPEH P5ED

Source Field

pmUtranRabReleaseUIntCsSpeech

Source Section

UtranCell

pmUtranRabReleaseUIntHs

HS Drop rate- UTRAN initiated abnormal releases due to UL interference

Data Source

GPEH P5ED

Source Field

pmUtranRabReleaseUIntHs

Source Section

UtranCell

pmUtranRabReleaseUIntPacket

PS Drop rate- UTRAN initiated abnormal releases due to UL interference

Data Source

GPEH P5ED

Source Field

pmUtranRabReleaseUIntPacket

Source Section

UtranCell

pOffset1Fach

Power offset for the TFCH. This parameter is applied to both FACH and PCH. { long, Range = 0..24, Default=0 }

Data Source

Bulk CM

Source Section

Fach

pOffset3Fach

Power offset for the pilot. This parameter is applied to both FACH and PCH. { long, Range = 0..24, Default=0 }

Data Source

Bulk CM

Source Section

Fach

primaryCpichPower

Power to be used for transmitting the PCPICH. { long, Range = -100..500, Default=300 }

Data Source

Bulk CM

Source Field

un:primaryCpichPower

Source Section

UtranCell

primarySchPower

Primary SCH power, relative to the primaryCpichPower value. { long, Range = -350..150, Default=-18 }

Data Source

Bulk CM

Source Field

un:primarySchPower

Source Section

UtranCell

primaryScramblingCode

The primary downlink scrambling code to be used in the cell. { long, Range = 0..511, Default=Mandatory }

Data Source

Bulk CM

Source Field

un:primaryScramblingCode

Source Section

UtranCell

pwrAdm

Admission limit for admission on DL cell carrier power. { long, Range = 0..100, Default=75 }

Data Source

Bulk CM

Source Section

UtranCell

pwrAdmOffset

Relative admission limit on DL cell carrier power. { long, Range = 0..100, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

pwrCongFilter

System constant. { long, Default=1 }

Data Source

Bulk CM

Source Section

UtranCell

pwrEstFact

System constant. { long, Default=30 }

Data Source

Bulk CM

Source Section

UtranCell

pwrHyst

Hysteresis time setting for detection of congestion in the DL transmitted carrier power. { long, Range = 0..60000, Default=300 }

Data Source

Bulk CM

Source Section

UtranCell

pwrOffset

Used by Congestion Control. { long, Range = 0..100, Default=5 }

Data Source

Bulk CM

Source Section

UtranCell

qHyst1

Cell reselection hysteresis used in UE functions in idle and connected mode. Value launched by System information (SIB3). { long, Range = 0..40, Default=4 }

Data Source

Bulk CM

Source Section

UtranCell

qHyst2

The hysteresis value of the serving cell. Used to perform cell ranking for the serving cell. { long, Range = 0..40, Default=4 }

Data Source

Bulk CM

Source Section

UtranCell

qQualMin

Used in UE functions for cell selection/reselection in idle mode and connected mode. Minimum required (acceptable) quality level in the cell (dB). { long, Range = -24..0, Default=-18 }

Data Source

Bulk CM

Source Section

UtranCell

qRxLevMin

Used in UE functions for cell selection/reselection in idle mode and connected mode. Minimum required { long, Range = -115..-25, Default=-115 }

Data Source

Bulk CM

Source Section

UtranCell

qualMeasQuantity

Used in UE functions for cell selection/reselection in idle and connected mode. Cell selection and reselection quality measure. Value launched by System information (SIB3, SIB11 and SIB12). { string, Default= CPICH_EC_NO }

Data Source

Bulk CM

Source Section

UtranCell

rac

Routing Area Code, RAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

un:rac

Source Section

UtranCell

releaseAseDL

Amount of ASE in DL to be released with each periodic congestion resolve action targeting guaranteed traffic class connections in a cell. { long, Range = 0..500, Default=1 }

Data Source

Bulk CM

Source Section

UtranCell

releaseAseDIGhs

Amount of ASE in DL to be released with each periodic congestion resolve action targeting guaranteed-hs traffic class connections in a cell. { long, Range = 0..5000, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

releaseAseDINg

Amount of ASE in DL to be released with each periodic congestion resolve action targeting non-guaranteed traffic class connections in a cell. { long, Range = 0..500, Default=3 }

Data Source

Bulk CM

Source Section

UtranCell

reservedBy

Reference to the PacketDataRouter MO which uses the PdrDevice. { sequence<PacketDataRouter,8>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

Pch

reservedBy_CM

Reference to the UtranRelation and/or CoverageRelation MO that corresponds to this UtranCell (having a reference to this UtranCell). { sequence<ManagedObject,*>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

UtranCell

rlFailureT

Guard period before sending RL Failure. { long, Range = 0..255, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

routingAreaRef

Reference to the RoutingArea Managed Object. { RoutingArea, Default= empty }

Data Source

Bulk CM

Source Section

UtranCell

sac

Service Area Code, SAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

un:sac

Source Section

UtranCell

sccpchOffset

Radio timing offset inside a radio frame. (SCCPCH parameter) { long, Range = 0..149, Default=0 }

Data Source

Bulk CM

Source Section

Fach

sccpchOffset_CM_PCH

Radio timing offset inside a radio frame. (SCCPCH parameter) { long, Range = 0..149, Default=20 }

Data Source

Bulk CM

Source Section

Pch

secondarySchPower

Secondary SCH power, relative to the primaryCpichPower value. { long, Range = -350..150, Default=-35 }

Data Source

Bulk CM

Source Field

un:secondarySchPower

Source Section

UtranCell

sf16Adm

Admission policy for admission on the number of Spreading Factor = 16 (traffic class=non-guaranteed, setup type=<all>) simultaneous connections in a cell in DL (SF histogram). { long, Range = 0..16, Default=16 }

Data Source

Bulk CM

Source Section

UtranCell

sf16AdmUI

Admission limit (traffic class = non-guaranteed/guaranteed-hs, admission class = handover or other) for number of radio links with UL SF = 16.

Data Source

Bulk CM

Source Field

es:sf16AdmUI

Source Section

UtranCell

sf16gAdm

Admission limit for RLs with Spreading Factor (SF) =16 in DL (guaranteed admission requests). { long, Range = 0..16, Default=16 }

Data Source

Bulk CM

Source Section

UtranCell

sf32Adm

Admission policy for admission on the number of Spreading Factor = 32 (traffic class=non-guaranteed, setup type=<all>) simultaneous connections in a cell in DL (SF histogram). { long, Range = 0..32, Default=32 }

Data Source

Bulk CM

Source Section

UtranCell

sf4AdmUI

Max. number of simultaneous connections in a cell in UL where each connection's Spreading Factor (SF) = 4 (service class = non-guaranteed/guaranteed-hs, setup type=all). { long, Range = 0..1000, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

sf4UIPathlossThreshold

The maximum path loss value between the UE and HS-serving cell at which a 384/HS RAB is allowed to be established. { long, Range = 15..170, Default=170 }

Data Source

Bulk CM

Source Section

UtranCell

sf8Adm

Admission policy for admission on the number of Spreading Factor = 8 (traffic class=non-guaranteed, setup type=<all>) simultaneous connections in a cell in DL (SF histogram). { long, Range = 0..8, Default=8 }

Data Source

Bulk CM

Source Section

UtranCell

sf8AdmUI

Admission limit (traffic class = non-guaranteed/guaranteed-hs, admission class = handover or other) for number of radio links with UL SF = 8.

Data Source

Bulk CM

Source Field

es:sf8AdmUI

Source Section

UtranCell

sHcsRat

RAT specific threshold in the serving cell used in the inter-RAT measurement rules. { long, Range = -105..91, Default=-105 }

Data Source

Bulk CM

Source Section

UtranCell

sib1PlmnScopeValueTag

The area identity part of PLMN scope value tages for SIB1 { long, Range = 0..31, Default=Mandatory }

Data Source

Bulk CM

Source Section

UtranCell

sInterSearch

The decision on when measurements on inter frequencies shall be performed. { long, Range = 0..27, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

sIntraSearch

The decision on when measurements on intra frequencies shall be performed. { long, Range = 0..27, Default=0 }

Data Source

Bulk CM

Source Section

UtranCell

snDirectedRetryTarget

snDirected Retry Target

Data Source

Bulk CM

Source Field

es:snDirectedRetryTarget

Source Section

UtranCell

sRatSearch

The decision on when measurements on GSM frequencies shall be performed is made using this parameter in { long, Range = -32..20, Default=4 }

Data Source

Bulk CM

Source Section

UtranCell

tCell

Timing delay used for defining start of SCH, CPICH and the DL scrambling codes. { long, Range = 0..9, Default=Mandatory }

Data Source

Bulk CM

Source Section

UtranCell

tfsFlexConstant

System constant. { long, Default=10 }

Data Source

Bulk CM

Source Section

UtranCell

tmCongAction

Interval between periodic congestion resolve actions on guaranteed traffic class connections in a cell. { long, Range = 300..100000, Default=2000 }

Data Source

Bulk CM

Source Section

UtranCell

tmCongActionGhs

Interval between periodic congestion resolve actions on guaranteed-hs traffic class connections in a cell. { long, Range = 10..100000, Default=300 }

Data Source

Bulk CM

Source Section

UtranCell

tmCongActionNg

Interval between periodic congestion resolve actions on non-guaranteed traffic class connections in a cell. { long, Range = 500..100000, Default=800 }

Data Source

Bulk CM

Source Section

UtranCell

tmInitialG

Minimum time before congestion resolve actions are initiated on guaranteed traffic class connections in a cell (after detection of DL cell congestion). { long, Range = 10..100000, Default=3000 }

Data Source

Bulk CM

Source Section

UtranCell

tmInitialGhs

Minimum time before congestion resolve actions are initiated on guaranteed-hs traffic class connections in a cell (after detection of DL cell congestion). { long, Range = 10..100000, Default=500 }

Data Source

Bulk CM

Source Section

UtranCell

treSelection

Control of cell selection/reselection. Time-to-trigger for cell reselection in seconds. { long, Range = 0..31, Default=2 }

Data Source

Bulk CM

Source Section

UtranCell

txFilter

System constant. { long, Default=5 }

Data Source

Bulk CM

Source Section

UtranCell

txInterval

System constant. { long, Default=1000 }

Data Source

Bulk CM

Source Section

UtranCell

uarfcnDl

The DL UTRA absolute Radio Frequency Channel number, UARFCN (Ref. 3GPP TS 25.433).
{ long, Range = 412, 437, 462, 487, 512, 537, 562, 587, 612, 637, 662, 687, 1007, 1012,,
Default=Mandatory }

Data Source

Bulk CM

Source Field

un:uarfcnDl

Source Section

UtranCell

uarfcnUl

The UL UTRA absolute Radio Frequency Channel number, UARFCN (Ref. 3GPP TS 25.433).
{ uarfcnUl, Range = 12, 37, 62, 87, 112, 137, 162, 187, 212, 237, 262, 287, 782, 787, 807, 812,
Default=Mandatory }

Data Source

Bulk CM

Source Field

un:uarfcnUl

Source Section

UtranCell

ulPathlossCheckEnabled

Enable/disable the path loss check for UL 384/HS RABs { BooleanVals, Default= FALSE }

Data Source

Bulk CM

Source Section

UtranCell

usageState

The usage state of the Packet Data Router device. { string, Default= IDLE, ReadOnly, NonPersistent, NoNotification }

Data Source

Bulk CM

Source Section

Pch

usedFreqThresh2dEcno

Threshold for event 2d for the used frequency when the measurement quantity is Ec/No. { long, Range = -24..0, Default=-12 }

Data Source

Bulk CM

Source Section

UtranCell

usedFreqThresh2dRscp

Threshold for event 2d for the used frequency when the measurement quantity is RSCP. { long, Range = -115..-25, Default=-97 }

Data Source

Bulk CM

Source Section

UtranCell

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Field

un:userLabel

Source Section

UtranCell

userLabel_CM

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

Fach

userLabel_CM_HSDSCH

Free to use

Data Source

Bulk CM

Source Field

es:userLabel

Source Section

HsdSCH

userLabel_CM_PCH

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Section

Pch

utranCellIubLink

Fully Distinguished Name of the Iub link object associated with this UtranCell.

Data Source

Bulk CM

Source Field

un:utranCellIubLink

Source Section

UtranCell

utranCellPosition_PC1

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC10

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC11

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC12

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC13

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three

corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC14

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC15

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC2

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC3

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC4

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three

corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC5

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC6

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC7

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC8

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

utranCellPosition_PC9

Each polygon corner (used for UE positioning) is described by <latitude sign (north or south)>:<latitude>:<longitude>. For polygon corner 1 is represented with position 0,1 and 2. The other configured polygon corners follows in the sequence. There must at least be three

corners (that is 9 positions in the sequence) configured in a polygon when the function is active/used.

Data Source

Bulk CM

Source Field

es:utranCellPosition

Source Section

UtranCell

UtranRelation Primitive Calculations

The following is a list of primitive calculations for the UtranRelation entity.

adjacentCell

FDN - Reference to UtranCell (RNC mirror) or ExternalUtranCell (SubNetwork) which contains the specification of the adjacent cell.

Calculation

UtranRelationName

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

Inter_Frequency_Handover_Success_Rate_CS_non_speech

Hard handover success rate between frequencies in UtranCell for CS non-speech calls.

Calculation

$$100.0 * \text{pmSuccNonBlindInterFreqHoCsConversational} / \text{pmAttNonBlindInterFreqHoCsConversational}$$

Inter_Frequency_Handover_Success_Rate_Other_Services

Hard handover success rate between frequencies in UtranCell for other services.

Calculation

$$100.0 * \text{pmSuccNonBlindInterFreqHoStreamingOther} / \text{pmAttNonBlindInterFreqHoStreamingOther}$$

Inter_Frequency_Handover_Success_Rate_PS_Interactive_64OrLess

Hard handover success rate between frequencies in UtranCell for PS interactive calls with data rate less than or equal 64kbps.

Calculation

$$100.0 * \text{pmSuccNonBlindInterFreqHoPsInteractiveLess64} / \text{pmAttNonBlindInterFreqHoPsInteractiveLess64}$$

Inter_Frequency_Handover_Success_Rate_PS_Interactive_Greater_64

Hard handover success rate between frequencies in UtranCell for PS interactive calls with data rate larger than 64kbps.

Calculation

$$100.0 * \text{pmSuccNonBlindInterFreqHoPsInteractiveGreater64} / \text{pmAttNonBlindInterFreqHoPsInteractiveGreater64}$$

Inter_Frequency_HO_Success_Rate_Speech

Hard handover success rate between frequencies in UtranCell for speech calls

Calculation

$$100.0 * \text{pmSuccNonBlindInterFreqHoCsSpeech12} / \text{pmAttNonBlindInterFreqHoCsSpeech12}$$

NUMDAYS

of days in Report

Calculation

$$\text{DAYSINREPORT}()$$

NUMHOURS

of hours in Summation Data

Calculation

RIAddSuccBestCellSpeechRate

Percentage of successfully added Radio Link additions for speech 12.2 kbps CS RAB that succeeded

Calculation

$$\text{pmRIAddSuccessBestCellSpeech} * 100.0 / \text{pmRIAddAttemptsBestCellSpeech}$$

UtranRelation Peg Counts

The following is a list of peg counts for the UtranRelation entity.

cId

cId is the identifier of a cell in one RNC (Ref. 3GPP TS 25.401).

Data Source

Bulk CM

Source Field

un:cId

Source Section

ExternalUtranCell

individualOffset

Used in UE function event-reporting. This offset is added to the measured quantity before the UE evaluates if an event has occurred. { long, Range = -100..100, Default=0 }

Data Source

Bulk CM

Source Section

ExternalUtranCell

lac

Location Area Code, LAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

un:lac

Source Section

ExternalUtranCell

loadSharingCandidate

Identifies the target cell as an interfrequency load sharing candidate of the source cell. 0 = FALSE, 1 = TRUE

Data Source

Bulk CM

Source Field

es:loadSharingCandidate

Source Section

UtranRelation

maxTxPowerUI

The maximum UE transmission power on the RACH when accessing the system. Used in UE functions for cell selection/reselection in idle mode and connected mode. Also used by UTRAN to control the maximum TX power level an UE may use. { long, Range = -50..33, Default=100, 100, }

Data Source

Bulk CM

Source Section

ExternalUtranCell

mcc

Mobile Country Code, MCC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:mcc

Source Section

ExternalUtranCell

mnc

Mobile Network Code, MNC. It is a part of the PLMN Id (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:mnc

Source Section

ExternalUtranCell

PERLENSEC

Period Length

Source Field

PERLENSEC

Source Section

UtranRelation_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC

Source Field

PERLENSEC

Source Section

UtranRelation_WMGeneral

pmAttNonBlindInterFreqHoCsConversational

Number of attempted non-blind outgoing inter-frequency handovers for RAB = CS
Conversational except speech

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoCsConversational

Source Section

UtranRelation

pmAttNonBlindInterFreqHoCsSpeech12

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Conversational speech

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoCsSpeech12

Source Section

UtranRelation

pmAttNonBlindInterFreqHoPsInteractiveGreater64

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Interactive greater than 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoPsInteractiveGreater64

Source Section

UtranRelation

pmAttNonBlindInterFreqHoPsInteractiveLess64

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Interactive less than or equal to 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoPsInteractiveLess64

Source Section

UtranRelation

pmAttNonBlindInterFreqHoStreamingOther

Number of attempted non-blind outgoing inter-frequency handovers for RAB = Streaming

Data Source

NodeB_RNC_RXI

Source Field

pmAttNonBlindInterFreqHoStreamingOther

Source Section

UtranRelation

pmFailNonBlindInterFreqHoFailRevertCsConversational

Number of failed non-blind outgoing inter-frequency handovers, where the UE fails to return to the present active set, for RAB = CS Conversational except speech

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoFailRevertCsConversational

Source Section

UtranRelation

pmFailNonBlindInterFreqHoFailRevertCsSpeech12

Number of failed non-blind outgoing inter-frequency handovers, where the UE fails to return to the present active set, for RAB = CS speech

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoFailRevertCsSpeech12

Source Section

UtranRelation

pmFailNonBlindInterFreqHoFailRevertPsInteractiveGreater64

Number of failed non-blind outgoing inter-frequency handovers, where the UE fails to return to the present active set, for RAB = Interactive greater than 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoFailRevertPsInteractiveGreater64

Source Section

UtranRelation

pmFailNonBlindInterFreqHoFailRevertPsInteractiveLess64

Number of failed non-blind outgoing inter-frequency handovers, where the UE fails to return to the present active set, for RAB = Interactive less than or equal to 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoFailRevertPsInteractiveLess64

Source Section

UtranRelation

pmFailNonBlindInterFreqHoFailRevertStreamingOther

Number of failed non-blind outgoing inter-frequency handovers, where the UE fails to return to the present active set, for RAB = Streaming and Others

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoFailRevertStreamingOther

Source Section

UtranRelation

pmFailNonBlindInterFreqHoRevertCsConversational

Number of failed non-blind outgoing inter-frequency handovers, where the UE returns to the present active set, for RAB = CS Conversational except speech

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoRevertCsConversational

Source Section

UtranRelation

pmFailNonBlindInterFreqHoRevertCsSpeech12

Number of failed non-blind outgoing inter-frequency handovers, where the UE returns to the present active set, for RAB = Conversational speech

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoRevertCsSpeech12

Source Section

UtranRelation

pmFailNonBlindInterFreqHoRevertPsInteractiveGreater64

Number of failed non-blind outgoing inter-frequency handovers, where the UE returns to the present active set, for RAB = Interactive greater than 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoRevertPsInteractiveGreater64

Source Section

UtranRelation

pmFailNonBlindInterFreqHoRevertPsInteractiveLess64

Number of failed non-blind outgoing inter-frequency handovers, where the UE returns to the present active set, for RAB = Interactive less than or equal to 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoRevertPsInteractiveLess64

Source Section

UtranRelation

pmFailNonBlindInterFreqHoRevertStreamingOther

Number of failed non-blind outgoing inter-frequency handovers, where the UE returns to the present active set, for RAB = Streaming and Others

Data Source

NodeB_RNC_RXI

Source Field

pmFailNonBlindInterFreqHoRevertStreamingOther

Source Section

UtranRelation

pmNoAttOutCnhhoCsNonSpeech

Number of attempts to perform an outgoing CN Hard Handover for a CS RAB. When there are more than one cell in AS, the counter is stepped in the best cell (other than speech).

Data Source

RNC

Source Field

pmNoAttOutCnhhoCsNonSpeech

Source Section

UtranRelation

pmNoAttOutCnhhoPsConnRelease

Number of connection releases attempts due to that a CN HHO is needed. When there are more than one cell in AS, the counter is stepped in the best cell.

Data Source

RNC

Source Field

pmNoAttOutCnhhoPsConnRelease

Source Section

UtranRelation

pmNoAttOutCnhhoSpeech

Number of attempts to perform an outgoing CN Hard Handover for speech RAB. When there are more than one cell in AS, the counter is stepped in the best cell.

Data Source

RNC

Source Field

pmNoAttOutCnhhoSpeech

Source Section

UtranRelation

pmNoSuccOutCnhhoCsNonSpeech

Number of successful outgoing CN Hard Handover for a CS RAB. When there are more than one cell in AS, the counter is stepped in the best cell (other than speech).

Data Source

RNC

Source Field

pmNoSuccOutCnhhoCsNonSpeech

Source Section

UtranRelation

pmNoSuccOutCnhhoSpeech

Number of successful outgoing CN Hard Handover for speech RAB. When there are more than one cell in AS, the counter is stepped in the best cell.

Data Source

RNC

Source Field

pmNoSuccOutCnhhoSpeech

Source Section

UtranRelation

pmRIAddAttemptsBestCellCsConvers

Number Radio Link additions attempted for conversational 64 kbps CS RAB where this UTRAN relation defines a neighbour relation from the best cell in the current active set to the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellCsConvers

Source Section

UtranRelation

pmRIAddAttemptsBestCellPacketHigh

Number Radio Link additions attempted for interactive PS RAB with data rate higher than 64 kbps where this UTRAN relation defines a neighbour relation between the best cell in the current active set and the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellPacketHigh

Source Section

UtranRelation

pmRIAddAttemptsBestCellPacketLow

Number Radio Link additions attempted for interactive PS RAB with data rate of 64 kbps or less where this UTRAN relation defines a neighbour relation from the best cell in the current active set to the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellPacketLow

Source Section

UtranRelation

pmRIAddAttemptsBestCellSpeech

Number Radio Link additions attempted for speech 12.2 kbps CS RAB where this UTRAN relation defines a neighbour relation from the best cell in the current active set to the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellSpeech

Source Section

UtranRelation

pmRIAddAttemptsBestCellStandAlone

Number Radio Link additions attempted for RRC only connections where this UTRAN relation defines a neighbour relation from the best cell in the current active set to the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellStandAlone

Source Section

UtranRelation

pmRIAddAttemptsBestCellStream

Number Radio Link additions attempted for streaming 57.6 kbps CS RAB where this UTRAN relation defines a neighbour relation from the best cell in the current active set to the cell that is attempted to be added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddAttemptsBestCellStream

Source Section

UtranRelation

pmRIAddSuccessBestCellCsConvers

Number Radio Link additions for conversational 64 kbps CS RAB that succeeded where this UTRAN relation defines a neighbour relation from the best cell in the previous active set to the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellCsConvers

Source Section

UtranRelation

pmRIAddSuccessBestCellPacketHigh

Number Radio Link additions for interactive PS RAB with data rate higher than 64 kbps that succeeded where this UTRAN relation defines a neighbour relation from the best cell in the previous active set to the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellPacketHigh

Source Section

UtranRelation

pmRIAddSuccessBestCellPacketLow

Number Radio Link additions for interactive PS RAB with data rate of 64 kbps or less that succeeded where this UTRAN relation defines a neighbour relation from the best cell in the previous active set to the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellPacketLow

Source Section

UtranRelation

pmRIAddSuccessBestCellSpeech

Number Radio Link additions for speech 12.2 kbps CS RAB that succeeded where this UTRAN relation defines a neighbour relation between the best cell in the previous active set and the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellSpeech

Source Section

UtranRelation

pmRIAddSuccessBestCellStandAlone

Number Radio Link additions for RRC only connections that succeeded where this UTRAN relation defines a neighbour relation from the best cell in the previous active set to the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellStandAlone

Source Section

UtranRelation

pmRIAddSuccessBestCellStream

Number Radio Link additions for streaming 57.6 kbps CS RAB that succeeded where this UTRAN relation defines a neighbour relation from the best cell in the previous active set to the cell that has just been successfully added

Data Source

NodeB_RNC_RXI

Source Field

pmRIAddSuccessBestCellStream

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoCsConversational

Number of successful non-blind outgoing inter-frequency handovers for RAB = CS Conversational except speech

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoCsConversational

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoCsSpeech12

Number of successful non-blind outgoing inter-frequency handovers for RAB = Conversational speech

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoCsSpeech12

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoPsInteractiveGreater64

Number of successful non-blind outgoing inter-frequency handovers for RAB = Interactive greater than 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoPsInteractiveGreater64

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoPsInteractiveLess64

Number of successful non-blind outgoing inter-frequency handovers for RAB = Interactive less than or equal to 64 kbps

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoPsInteractiveLess64

Source Section

UtranRelation

pmSuccNonBlindInterFreqHoStreamingOther

Number of successful non-blind outgoing inter-frequency handovers for RAB = Streaming

Data Source

NodeB_RNC_RXI

Source Field

pmSuccNonBlindInterFreqHoStreamingOther

Source Section

UtranRelation

primaryCpichPower

The power of the primary CPICH channel in the cell (Ref. 3GPP TS 25.433).

Data Source

Bulk CM

Source Field

un:primaryCpichPower

Source Section

ExternalUtranCell

primaryScramblingCode

The primary DL scrambling code used by the cell (Ref. 3GPP TS 25.433). { long, Range = 0..511, Default=Mandatory }

Data Source

Bulk CM

Source Field

un:primaryScramblingCode

Source Section

ExternalUtranCell

qOffset1sn

Maps to rnc.LCell.outInterFreqFDDAdjCells.qOffset1

Data Source

Bulk CM

Source Field

lu:qOffset1

Source Section

UtranRelation

qOffset2sn

Maps to rnc.LCell.outInterFreqFDDAdjCells.qOffset2

Data Source

Bulk CM

Source Field

lu:qOffset2

Source Section

UtranRelation

qQualMin

Used in UE functions for cell selection/reselection in idle mode and connected mode. Minimum required (acceptable) quality level in the cell (dB). Used to set cell border between two cells. { long, Range = -24..0, Default=100, 100, }

Data Source

Bulk CM

Source Section

ExternalUtranCell

qRxLevMin

Used in UE functions for cell selection/reselection in idle mode and connected mode. Minimum required (acceptable) RX level in the cell. (dBm). Value launched by System information (SIB11) for each intrafrequency measurement object corresponding to adjace { long, Range = -115..-25, Default=100, 100, }

Data Source

Bulk CM

Source Section

ExternalUtranCell

rac

Routing Area Code, RAC (Ref. 3GPP TS 23.003)

Data Source

Bulk CM

Source Field

un:rac

Source Section

ExternalUtranCell

reservedBy

Reference to the UtranRelation MO that corresponds to this ExternalUtranCell (having a reference to this ExternalUtranCell). { sequence<UtranRelation,*>, Default = empty, Default=, ReadOnly, }

Data Source

Bulk CM

Source Section

ExternalUtranCell

rncId

Unique RNC ID of the External RNC (Ref. 3GPP TS 23.003).

Data Source

Bulk CM

Source Field

un:rncId

Source Section

ExternalUtranCell

uarfcnDl

The DL UTRA absolute Radio Frequency Channel number, UARFCN (Ref. 3GPP TS 25.433).
{ long, Range = 412, 437, 462, 487, 512, 537, 562, 587, 612, 637, 662, 687, 1007, 1012,,
Default=Mandatory }

Data Source

Bulk CM

Source Field

un:uarfcnDl

Source Section

ExternalUtranCell

uarfcnUl

The UL UTRA absolute Radio Frequency Channel number, UARFCN (Ref. 3GPP TS 25.433).
{ long, Range = 12, 37, 62, 87, 112, 137, 162, 187, 212, 237, 262, 287, 782, 787, 807, 812,,
Default=Mandatory }

Data Source

Bulk CM

Source Field

un:uarfcnUl

Source Section

ExternalUtranCell

userLabel

Provides the possibility to put a user-friendly label on the MO instance. The value is not used by the RNC. { string, LengthRange = 0..128, Default= "" }

Data Source

Bulk CM

Source Field

un:userLabel

Source Section

ExternalUtranCell

UtranRelationName

Pointer to UTRAN cell Relation or external UTRAN cell. Fully Distinguished Name of the corresponding object.

Data Source

Bulk CM

Source Field

un:adjacentCell

Source Section

UtranRelation

Vc12Ttp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Vc12Ttp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vc12Ttp_NodeB Peg Counts

The following is a list of peg counts for the Vc12Ttp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

Vc12Ttp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vc12Ttp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Vc12Ttp_NodeB_WMGeneral

pmVcBbe

Transmission Background Block Errors (BBE). Number of errored blocks not being part of a SES.

Data Source

NodeB_RXI

Source Field

pmVcBbe

Source Section

Vc12Ttp

pmVcEs

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmVcEs

Source Section

Vc12Ttp

pmVcSes

The total number of Severly Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmVcSes

Source Section

Vc12Ttp

pmVcUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severely Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

NodeB_RXI

Source Field

pmVcUas

Source Section

Vc12Ttp

Vc12Ttp_RNC Primitive Calculations

The following is a list of primitive calculations for the Vc12Ttp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vc12Ttp_RNC Peg Counts

The following is a list of peg counts for the Vc12Ttp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vc12Ttp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Vc12Ttp_RNC_WMGeneral

pmVcBbe

Transmission Background Block Errors (BBE). Number of errored blocks not being part of a SES.

Data Source

RNC_RXI

Source Field

pmVcBbe

Source Section

Vc12Ttp

pmVcEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmVcEs

Source Section

Vc12Ttp

pmVcSes

The total number of Severly Errored Seconds.

Data Source

RNC_RXI

Source Field

pmVcSes

Source Section

Vc12Ttp

pmVcUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severly Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

RNC_RXI

Source Field

pmVcUas

Source Section

Vc12Ttp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

Vc12Ttp_RNC

Vc4Ttp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Vc4Ttp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vc4Ttp_NodeB Peg Counts

The following is a list of peg counts for the Vc4Ttp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

Vc4Ttp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vc4Ttp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Vc4Ttp_NodeB_WMGeneral

pmVcBbe

Transmission Background Block Errors (BBE). Number of errored blocks not being part of a SES.

Data Source

NodeB_RXI

Source Field

pmVcBbe

Source Section

Vc4Ttp

pmVcEs

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmVcEs

Source Section

Vc4Ttp

pmVcSes

The total number of Severly Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmVcSes

Source Section

Vc4Ttp

pmVcUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severly Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

NodeB_RXI

Source Field

pmVcUas

Source Section

Vc4Ttp

Vc4Ttp_RNC Primitive Calculations

The following is a list of primitive calculations for the Vc4Ttp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vc4Ttp_RNC Peg Counts

The following is a list of peg counts for the Vc4Ttp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vc4Ttp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Vc4Ttp_RNC_WMGeneral

pmVcBbe

Transmission Background Block Errors (BBE). Number of errored blocks not being part of a SES.

Data Source

RNC_RXI

Source Field

pmVcBbe

Source Section

Vc4Ttp

pmVcEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmVcEs

Source Section

Vc4Ttp

pmVcSes

The total number of Severly Errored Seconds.

Data Source

RNC_RXI

Source Field

pmVcSes

Source Section

Vc4Ttp

pmVcUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severely Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

RNC_RXI

Source Field

pmVcUas

Source Section

Vc4Ttp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

Vc4Ttp_RNC

VclTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the VclTp_NodeB entity.

Avr_CellRate_Recieved_VclTp_NodeB

Average Received CellRate in the measurement period.

Calculation

$\text{pmReceivedAtmCells} / \text{PERLENSEC}$

Avr_CellRate_Transmitted_VclTp_NodeB

Average Transmitted CellRate in the measurement period.

Calculation

$\text{pmTransmittedAtmCells} / \text{PERLENSEC}$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

$\text{DAYSINREPORT}()$

NUMHOURS

of hours in Summation Data

Calculation

VclTp_NodeB Peg Counts

The following is a list of peg counts for the VclTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VclTp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VclTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VclTp_NodeB_WMGeneral

pmBwUtilizationRx_00

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_01

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_02

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_03

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_04

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_05

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_06

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_07

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_08

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_09

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_10

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_11

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_12

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_13

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_14

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_15

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_16

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_17

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_18

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_19

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_20

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationTx_00

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_01

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_02

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_03

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_04

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_05

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_06

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_07

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_08

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_09

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_10

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_11

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_12

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_13

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_14

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_15

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_16

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_17

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_18

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_19

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_20

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

NodeB_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmReceivedAtmCells

Number of received ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

VclTp_NodeB

pmTransmittedAtmCells

Number of transmitted ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

VclTp_NodeB

VclTp_RNC Primitive Calculations

The following is a list of primitive calculations for the VclTp_RNC entity.

Avr_CellRate_Recieved_VclTp_RNC

Average Received CellRate in the measurement period.

Calculation

$\text{pmReceivedAtmCells} / \text{PERLENSC}$

Avr_CellRate_Transmitted_VclTp_RNC

Average Transmitted CellRate in the measurement period.

Calculation

$\text{pmTransmittedAtmCells} / \text{PERLENSC}$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

$\text{DAYSINREPORT}()$

NUMHOURS

of hours in Summation Data

Calculation

VclTp_RNC Peg Counts

The following is a list of peg counts for the VclTp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VclTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VclTp_RNC_WMGeneral

pmBwUtilizationRx_00

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_01

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_02

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_03

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_04

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_05

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_06

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_07

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_08

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_09

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_10

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_11

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_12

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_13

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_14

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_15

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_16

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_17

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_18

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_19

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationRx_20

The counter shows the utilization of the virtual connection in the receiving direction represented by a histogram, consisting of a list of 21 numbers. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationRx

Source Section

VclTp

pmBwUtilizationTx_00

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_01

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_02

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_03

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_04

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_05

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_06

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_07

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_08

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_09

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_10

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_11

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_12

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_13

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_14

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_15

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_16

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_17

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_18

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_19

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmBwUtilizationTx_20

The counter shows the utilization of the virtual connection in the transmitting direction represented by a histogram, consisting of a list of 21 numbers, indexed from zero. The first number is Peak Cell Rate (PCR) and the next 20 numbers are different load ranges (range counters) for the VclTp MO. The load is sampled every 10s and depending on the sampled value, the corresponding range counter is increased.

Data Source

RNC_RXI

Source Field

pmBwUtilizationTx

Source Section

VclTp

pmReceivedAtmCells

Number of received ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

VclTp_RNC

pmTransmittedAtmCells

Number of transmitted ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

VclTp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VclTp_RNC

VpcTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the VpcTp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VpcTp_NodeB Peg Counts

The following is a list of peg counts for the VpcTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VpcTp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VpcTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VpcTp_NodeB_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

VpcTp_NodeB

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

VpcTp_NodeB

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

VpcTp_NodeB

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

VpcTp_NodeB

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

VpcTp_NodeB

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

VpcTp_NodeB

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

VpcTp_NodeB

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

VpcTp_NodeB

VpcTp_RNC Primitive Calculations

The following is a list of primitive calculations for the VpcTp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VpcTp_RNC Peg Counts

The following is a list of peg counts for the VpcTp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VpcTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VpcTp_RNC_WMGeneral

pmBwErrBlocks

Number of backward errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmBwErrBlocks

Source Section

VpcTp_RNC

pmBwLostCells

Number of backward lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwLostCells

Source Section

VpcTp_RNC

pmBwMissinsCells

Number of backward misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmBwMissinsCells

Source Section

VpcTp_RNC

pmFwErrBlocks

Number of forwarded errored blocks.

Data Source

NodeB_RNC_RXI

Source Field

pmFwErrBlocks

Source Section

VpcTp_RNC

pmFwLostCells

Number of forwarded lost cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwLostCells

Source Section

VpcTp_RNC

pmFwMissinsCells

Number of forwarded misinserted cells.

Data Source

NodeB_RNC_RXI

Source Field

pmFwMissinsCells

Source Section

VpcTp_RNC

pmLostBrCells

Number of lost bit rate cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostBrCells

Source Section

VpcTp_RNC

pmLostFpmCells

Number of lost Forward Performance Monitoring (FPM) cells.

Data Source

NodeB_RNC_RXI

Source Field

pmLostFpmCells

Source Section

VpcTp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VpcTp_RNC

VplTp_NodeB Primitive Calculations

The following is a list of primitive calculations for the VplTp_NodeB entity.

Avr_CellRate_Recieved_VplTp_NodeB

Average Received CellRate in the measurement period.

Calculation

$\text{pmReceivedAtmCells} / \text{PERLENSEC}$

Avr_CellRate_Transmitted_VplTp_NodeB

Average Transmitted CellRate in the measurement period.

Calculation

$\text{pmTransmittedAtmCells} / \text{PERLENSEC}$

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

VplTp_NodeB Peg Counts

The following is a list of peg counts for the VplTp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VplTp_NodeB

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VplTp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VplTp_NodeB_WMGeneral

pmReceivedAtmCells

Number of received ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

VplTp_NodeB

pmTransmittedAtmCells

Number of transmitted ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

VplTp_NodeB

VplTp_RNC Primitive Calculations

The following is a list of primitive calculations for the VplTp_RNC entity.

Avr_CellRate_Recieved_VplTp_RNC

Average Received CellRate in the measurement period.

Calculation

`pmReceivedAtmCells / PERLENSEC`

Avr_CellRate_Transmitted_VplTp_RNC

Average Transmitted CellRate in the measurement period.

Calculation

`pmTransmittedAtmCells / PERLENSEC`

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

`DAYSINREPORT()`

NUMHOURS

of hours in Summation Data

Calculation

VplTp_RNC Peg Counts

The following is a list of peg counts for the VplTp_RNC entity.

PERLENSEC

Period Length

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VplTp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

perlensec

Source Section

VplTp_RNC_WMGeneral

pmReceivedAtmCells

Number of received ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmReceivedAtmCells

Source Section

VplTp_RNC

pmTransmittedAtmCells

Number of transmitted ATM cells.

Data Source

NodeB_RNC_RXI

Source Field

pmTransmittedAtmCells

Source Section

VplTp_RNC

RNC_RELEASE

Release

Data Source

NodeB_RNC_RXI

Source Section

VplTp_RNC

Vt15Ttp_NodeB Primitive Calculations

The following is a list of primitive calculations for the Vt15Ttp_NodeB entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vt15Ttp_NodeB Peg Counts

The following is a list of peg counts for the Vt15Ttp_NodeB entity.

NodeB_RELEASE

Release

Data Source

NodeB_RXI

Source Field

NodeB_RELEASE

Source Section

Vt15Ttp_NodeB

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vt15Ttp_NodeB_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Source Field

PERLENSEC

Source Section

Vt15Ttp_NodeB_WMGeneral

pmEs

The total number of Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmEs

Source Section

Vt15Ttp

pmSes

The total number of Severely Errored Seconds.

Data Source

NodeB_RXI

Source Field

pmSes

Source Section

Vt15Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severely Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

NodeB_RXI

Source Field

pmUas

Source Section

Vt15Ttp

Vt15Ttp_RNC Primitive Calculations

The following is a list of primitive calculations for the Vt15Ttp_RNC entity.

GRAPHmultiLineSeparator

Special Control Field for Multi-Line Graphs

Calculation

""

NUMDAYS

of days in Report

Calculation

DAYSINREPORT ()

NUMHOURS

of hours in Summation Data

Calculation

Vt15Ttp_RNC Peg Counts

The following is a list of peg counts for the Vt15Ttp_RNC entity.

PERLENSEC

Period length in seconds

Source Field

PERLENSEC

Source Section

Vt15Ttp_RNC_WMGeneral

PERLENSEC_K

Period length in seconds aggregation summation in time domain and aggregation maximum between Network Elements.

Data Source

NodeB_RNC_RXI

Source Field

PERLENSEC

Source Section

Vt15Ttp_RNC_WMGeneral

pmEs

The total number of Errored Seconds.

Data Source

RNC_RXI

Source Field

pmEs

Source Section

Vt15Ttp

pmSes

The total number of Severely Errored Seconds.

Data Source

RNC_RXI

Source Field

pmSes

Source Section

Vt15Ttp

pmUas

Transmission Unavailable Seconds (UAS). The accumulated unavailable time in seconds during the interval. Unavailable time starts when 10 consecutive Severely Errored Seconds (SES) are detected (them being part of the unavailable time) and ends when 10 consecutive non SES are detected.

Data Source

RNC_RXI

Source Field

pmUas

Source Section

Vt15Ttp

RNC_RELEASE

Release

Data Source

RNC_RXI

Source Field

RNC_RELEASE

Source Section

Vt15Ttp_RNC

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

A

Aal0TpVccTp_NodeB	
peg counts	2117
primitive calculations	2117
Aal0TpVccTp_RNC	
peg counts	2121
primitive calculations	2121
Aal1TpVccTp_NodeB	
peg counts	2125
primitive calculations	2124
Aal2Ap_NodeB	
peg counts	2129
primitive calculations	2128
Aal2Ap_RNC	
peg counts	2143
primitive calculations	2142
Aal2PathVccTp_NodeB	
peg counts	2156
primitive calculations	2156
Aal2PathVccTp_RNC	
peg counts	2161
primitive calculations	2161
Aal2Sp_NodeB	
peg counts	2166
primitive calculations	2165
Aal2Sp_RNC	
peg counts	2168
primitive calculations	2167
Aal5TpVccTp_NodeB	
peg counts	2169
primitive calculations	2169
Aal5TpVccTp_RNC	
peg counts	2173
primitive calculations	2173
AddressFamily	
peg counts	1580
primitive calculations	1579
Aich	
peg counts	2177
primitive calculations	2176
AmrService	
peg counts	2179
primitive calculations	2179
AntennaBranch	
peg counts	2182
primitive calculations	2181

APN

peg counts	1584
primitive calculations	1581
AppContext_MSC	
peg counts	331
primitive calculations	331
AtmPort_NodeB	
peg counts	2184
primitive calculations	2183
AtmPort_RNC	
peg counts	2187
primitive calculations	2186
audience	321
available data fields	
GSN	1696
MSC	1031

B

BGPPeerIP	
peg counts	1607
primitive calculations	1606
BillingGtw	
peg counts	1610
primitive calculations	1609
BSC	
peg counts	333
primitive calculations	332
BSC_NI	
primitive calculations	451
BSC_SS7Dest	
primitive calculations	451
BSC_SS7HSLPrmGrp	
peg counts	452
primitive calculations	452
BSC_SS7Link	
peg counts	471
primitive calculations	469
BSSGP	
peg counts	1613
primitive calculations	1612

C

Card	
peg counts	1619
primitive calculations	1615
Carrier	
peg counts	2210

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

primitive calculations	2188	Destination	
CcDevice		peg counts	939
peg counts	2285	primitive calculations	938
primitive calculations	2285	DestinationCode	
CcDevice_NodeB		peg counts	946
peg counts	2287	primitive calculations	945
primitive calculations	2286	DHCP	
CcDevice_RNC		peg counts	1673
peg counts	2289	primitive calculations	1672
primitive calculations	2289	DigitalPath_MSC	
Cellset		peg counts	948
peg counts	935	primitive calculations	948
primitive calculations	935	DigPathType_BSC	
CnOperator		peg counts	951
primitive calculations	2291	primitive calculations	951
Connection		DigPathType_MSC	
peg counts	1668	peg counts	956
primitive calculations	1667	primitive calculations	955
ContinuityCheckService		DirTrunk	
peg counts	2292	peg counts	959
primitive calculations	2291	primitive calculations	956
CsdDigitalService		Distrib_Group_Switch	
peg counts	2295	peg counts	970
primitive calculations	2293	primitive calculations	969
CsdGsmFhService		DLCI	
peg counts	2305	peg counts	1676
primitive calculations	2304	primitive calculations	1674
CsdModemService		documentation	
peg counts	2308	assumptions about prior knowledge	321
primitive calculations	2307	font usage	322
D		typographical conventions	322
DataService_MSC		user	323
peg counts	938	viewing HTML Help	323
primitive calculations	937	viewing PDF	324
DcDevice		DownlinkBaseBandPool	
peg counts	2316	peg counts	2322
primitive calculations	2315	primitive calculations	2321
DcDevice_NodeB		DTISC	
peg counts	2318	peg counts	974
primitive calculations	2317	primitive calculations	973
DcDevice_RNC		DtmfRcvrService	
peg counts	2319	peg counts	2363
primitive calculations	2319	primitive calculations	2363
DestClass		DtmfSenderService	
peg counts	1671	peg counts	2366
primitive calculations	1670	primitive calculations	2365

E		Etm4_RNC	
E1PhysPathTerm_NodeB		primitive calculations	2520
peg counts	2369		
primitive calculations	2368		
E1PhysPathTerm_RNC		F	
peg counts	2371	FastEthernet_NodeB	
primitive calculations	2371	peg counts	2521
E1Ttp_NodeB		primitive calculations	2521
peg counts	2374	FastEthernet_RNC	
primitive calculations	2373	peg counts	2529
E1Ttp_RNC		primitive calculations	2528
peg counts	2377	font usage	
primitive calculations	2376	documentation	322
ECPool		ForwardClass	
peg counts	983	peg counts	1685
primitive calculations	983	primitive calculations	1684
ECRouteParameterSet		FrameSynch	
peg counts	2380	peg counts	2536
primitive calculations	2379	primitive calculations	2535
ECServiceRNC		G	
peg counts	2401	GeneralProcUnit_NodeB	
primitive calculations	2400	peg counts	2543
EDchResources		primitive calculations	2542
peg counts	2403	GeneralProcUnit_RNC	
primitive calculations	2403	peg counts	2551
EM		primitive calculations	2550
peg counts	988	GigaBitEthernet_NodeB	
primitive calculations	987	peg counts	2559
EOSCode		primitive calculations	2558
peg counts	990	GigaBitEthernet_RNC	
primitive calculations	989	peg counts	2572
Equipment_NodeB		primitive calculations	2571
primitive calculations	2510	Global_Titl_Trans_Typ	
Equipment_RNC		peg counts	991
primitive calculations	2511	primitive calculations	990
EthernetLink_NodeB		GsmRelation	
peg counts	2512	peg counts	2586
primitive calculations	2511	primitive calculations	2585
EthernetLink_RNC		GSN	
peg counts	2516	available data fields	1696
primitive calculations	2515	peg counts	1717
Etm1_NodeB		primitive calculations	1696
primitive calculations	2519	GSN_MM_Index	
Etm1_RNC		peg counts	1959
primitive calculations	2519	primitive calculations	1959
Etm4_NodeB		GSN_OvrProtect	
primitive calculations	2520	peg counts	1971

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

primitive calculations	1970	ImVariableMessage	
GSN_SM_Index		peg counts	2940
peg counts	1972	primitive calculations	2940
primitive calculations	1972	InmarsatDeviceService	
GSNType		peg counts	2942
primitive calculations	1974	primitive calculations	2942
GttService		Interface	
peg counts	2598	peg counts	1980
primitive calculations	2597	primitive calculations	1974
H		IP_NodeB	
Higher_Order_Path		peg counts	2945
peg counts	993	primitive calculations	2944
primitive calculations	992	IP_RNC	
HLRSubs		peg counts	2949
peg counts	997	primitive calculations	2948
primitive calculations	996	IpAccessHostGpb_NodeB	
HsDschResources		peg counts	2953
peg counts	2610	primitive calculations	2952
primitive calculations	2599	IpAccessHostGpb_RNC	
HTML Help format	323	peg counts	2964
		primitive calculations	2963
I		IpAccessHostMsb_NodeB	
ImaGroup_NodeB		peg counts	2974
peg counts	2918	primitive calculations	2973
primitive calculations	2917	IpAccessHostMsb_RNC	
ImaGroup_RNC		peg counts	2979
peg counts	2919	primitive calculations	2979
primitive calculations	2919	IpAccessHostSpb_NodeB	
ImaLink_NodeB		peg counts	2985
peg counts	2921	primitive calculations	2984
primitive calculations	2920	IpAccessHostSpb_RNC	
ImaLink_RNC		peg counts	2997
peg counts	2927	primitive calculations	2997
primitive calculations	2926	IpAtmLink_NodeB	
ImBasicMessage		peg counts	3010
peg counts	2933	primitive calculations	3009
primitive calculations	2932	IpAtmLink_RNC	
ImDeviceService		peg counts	3014
peg counts	2935	primitive calculations	3013
primitive calculations	2934	IpbService	
ImMessageComposition		peg counts	3018
peg counts	2936	primitive calculations	3017
primitive calculations	2935	IpEthPacketDataRouter	
ImService		peg counts	3020
peg counts	2938	primitive calculations	3020
primitive calculations	2937	IpInterface_NodeB	
		peg counts	3024

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

primitive calculations	3023
IpInterface_RNC	
peg counts	3030
primitive calculations	3029
IpSystem_NodeB	
primitive calculations	3035
IpSystem_RNC	
primitive calculations	3035
ISDNESG	
peg counts	999
primitive calculations	998
IubDataStreams	
peg counts	3037
primitive calculations	3036
IubEdch	
peg counts	3225
primitive calculations	3225
IubLink	
peg counts	3232
primitive calculations	3232
IuLink	
peg counts	3248
primitive calculations	3247
IurLink	
peg counts	3251
primitive calculations	3250
L	
LA	
peg counts	1005
primitive calculations	1004
LA_RNC	
peg counts	3270
primitive calculations	3270
LAPD	
peg counts	1013
primitive calculations	1012
LATA	
peg counts	1016
primitive calculations	1015
LossRoute	
peg counts	1017
primitive calculations	1016
Lower_Order_Path	
peg counts	1023
primitive calculations	1023

M	
M3uAssociation_NodeB	
peg counts	3274
primitive calculations	3273
M3uAssociation_RNC	
peg counts	3286
primitive calculations	3285
MapOp	
peg counts	1028
primitive calculations	1027
MccService	
peg counts	3299
primitive calculations	3298
MediumAccUnit_NodeB	
peg counts	3301
primitive calculations	3300
MediumAccUnit_RNC	
peg counts	3303
primitive calculations	3302
MfhService	
peg counts	3304
primitive calculations	3304
MpcService	
peg counts	3306
primitive calculations	3305
MSC	
available data fields	1031
peg counts	1044
primitive calculations	1032
MSC_SS7Dest	
peg counts	1202
primitive calculations	1201
MSC_SS7HSLPrmGrp	
peg counts	1204
primitive calculations	1203
MSC_SS7Link	
peg counts	1224
primitive calculations	1220
MSC_SS7LinkSet	
peg counts	548, 1294
primitive calculations	543, 1289
MSC_SS7RouteSet	
peg counts	563, 1309
primitive calculations	562, 1308
MSCOutTrunk	
peg counts	565, 1311
primitive calculations	564, 1310

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

MSCTrunkDest		primitive calculations	579, 1325
peg counts	568, 1314	NbapCommon	
primitive calculations	566, 1312	peg counts	3355
MSCTrunkType		primitive calculations	3354
peg counts	572, 1318	NBCell	
primitive calculations	571, 1317	peg counts	614, 1360
Mtp2Tp_NodeB		primitive calculations	611, 1357
peg counts	3308	Net_BGPPeerIP	
primitive calculations	3308	peg counts	2018
Mtp2Tp_RNC		primitive calculations	2017
peg counts	3313	Net_OSPFArea	
primitive calculations	3312	peg counts	2020
Mtp3bAp_NodeB		primitive calculations	2020
peg counts	3317	Net_OSPFInterface	
primitive calculations	3317	peg counts	2023
Mtp3bAp_RNC		primitive calculations	2022
peg counts	3319	Net_OSPFNeighIP	
primitive calculations	3319	peg counts	2024
Mtp3bSI_NodeB		primitive calculations	2024
peg counts	3321	Network	
primitive calculations	3320	peg counts	2025
Mtp3bSI_RNC		primitive calculations	2025
peg counts	3325	NI	
primitive calculations	3324	primitive calculations	624, 1370
Mtp3bSIs_NodeB		NniSaalTp_NodeB	
primitive calculations	3328	peg counts	3359
Mtp3bSIs_RNC		primitive calculations	3358
primitive calculations	3328	NniSaalTp_RNC	
Mtp3bSp_NodeB		peg counts	3364
peg counts	3329	primitive calculations	3364
primitive calculations	3329	NodeB	
Mtp3bSp_RNC		peg counts	3370
peg counts	3341	primitive calculations	3369
primitive calculations	3340	NrService	
Mtp3bSrs_NodeB		peg counts	3374
peg counts	3352	primitive calculations	3374
primitive calculations	3352	NSVC	
Mtp3bSrs_RNC		peg counts	2027
peg counts	3353	primitive calculations	2027
primitive calculations	3353		
Multiplex_Section		O	
peg counts	575, 1321	Os155PhyPathTrm_NodeB	
primitive calculations	575, 1321	peg counts	3377
		primitive calculations	3376
N		Os155PhyPathTrm_RNC	
NB_MSC		peg counts	3380
peg counts	580, 1326	primitive calculations	3379

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Ospf_NodeB		Aal0TpVccTp_RNC	2121
peg counts	3382	Aal1TpVccTp_NodeB	2125
primitive calculations	3382	Aal2Ap_NodeB	2129
Ospf_RNC		Aal2Ap_RNC	2143
peg counts	3384	Aal2PathVccTp_NodeB	2156
primitive calculations	3384	Aal2PathVccTp_RNC	2161
OSPFArea		Aal2Sp_NodeB	2166
peg counts	2029	Aal2Sp_RNC	2168
primitive calculations	2028	Aal5TpVccTp_NodeB	2169
OspfArea_NodeB		Aal5TpVccTp_RNC	2173
peg counts	3386	AddressFamily	1580
primitive calculations	3386	Aich	2177
OspfArea_RNC		AmrService	2179
peg counts	3388	AntennaBranch	2182
primitive calculations	3388	APN	1584
OSPFInterface		AppContext_MSC	331
peg counts	2032	AtmPort_NodeB	2184
primitive calculations	2031	AtmPort_RNC	2187
OspfInterface_NodeB		BGPPeerIP	1607
peg counts	3390	BillingGtw	1610
primitive calculations	3390	BSC	333
OspfInterface_RNC		BSC_SS7HSLPrmGrp	452
peg counts	3392	BSC_SS7Link	471
primitive calculations	3391	BSSGP	1613
OSPFNeighIP		Card	1619
peg counts	2033	Carrier	2210
primitive calculations	2032	CcDevice	2285
P		CcDevice_NodeB	2287
PacketDataRouter		CcDevice_RNC	2289
peg counts	3394	Cellset	935
primitive calculations	3393	Connection	1668
PacketDataRouter_RNC		ContinuityCheckService	2292
peg counts	3399	CsdDigitalService	2295
primitive calculations	3398	CsdGsmFhService	2305
PDF format	324	CsdModemService	2308
PdrDevice		DataService_MSC	938
peg counts	3402	DcDevice	2316
primitive calculations	3402	DcDevice_NodeB	2318
PdrDevice_NodeB		DcDevice_RNC	2319
peg counts	3404	DestClass	1671
primitive calculations	3404	Destination	939
PdrDevice_RNC		DestinationCode	946
peg counts	3406	DHCP	1673
primitive calculations	3406	DigitalPath_MSC	948
peg counts		DigPathType_BSC	951
Aal0TpVccTp_NodeB	2117	DigPathType_MSC	956
		DirTrunk	959

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Distrib_Group_Switch	970	IP_NodeB	2945
DLCI	1676	IP_RNC	2949
DownlinkBaseBandPool	2322	IpAccessHostGpb_NodeB	2953
DTISC	974	IpAccessHostGpb_RNC	2964
DtmfRcvrService	2363	IpAccessHostMsb_NodeB	2974
DtmfSenderService	2366	IpAccessHostMsb_RNC	2979
E1PhysPathTerm_NodeB	2369	IpAccessHostSpb_NodeB	2985
E1PhysPathTerm_RNC	2371	IpAccessHostSpb_RNC	2997
E1Ttp_NodeB	2374	IpAtmLink_NodeB	3010
E1Ttp_RNC	2377	IpAtmLink_RNC	3014
ECPool	983	IpbService	3018
ECRouteParameterSet	2380	IpEthPacketDataRouter	3020
ECServiceRNC	2401	IpInterface_NodeB	3024
EDchResources	2403	IpInterface_RNC	3030
EM	988	ISDNESG	999
EOSCode	990	IubDataStreams	3037
EthernetLink_NodeB	2512	IubEdch	3225
EthernetLink_RNC	2516	IubLink	3232
FastEthernet_NodeB	2521	IuLink	3248
FastEthernet_RNC	2529	IurLink	3251
ForwardClass	1685	LA	1005
FrameSynch	2536	LA_RNC	3270
GeneralProcUnit_NodeB	2543	LAPD	1013
GeneralProcUnit_RNC	2551	LATA	1016
GigaBitEthernet_NodeB	2559	LossRoute	1017
GigaBitEthernet_RNC	2572	Lower_Order_Path	1023
Global_Titl_Trans_Typ	991	M3uAssociation_NodeB	3274
GsmRelation	2586	M3uAssociation_RNC	3286
GSN	1717	MapOp	1028
GSN_MM_Index	1959	MccService	3299
GSN_OvrProtect	1971	MediumAccUnit_NodeB	3301
GSN_SM_Index	1972	MediumAccUnit_RNC	3303
GttService	2598	MfhService	3304
Higher_Order_Path	993	MpcService	3306
HLRSubs	997	MSC	1044
HsDschResources	2610	MSC_SS7Dest	1202
ImaGroup_NodeB	2918	MSC_SS7HSLPrmGrp	1204
ImaGroup_RNC	2919	MSC_SS7Link	1224
ImaLink_NodeB	2921	MSC_SS7LinkSet	548, 1294
ImaLink_RNC	2927	MSC_SS7RouteSet	563, 1309
ImBasicMessage	2933	MSCOutTrunk	565, 1311
ImDeviceService	2935	MSCTrunkDest	568, 1314
ImMessageComposition	2936	MSCTrunkType	572, 1318
ImService	2938	Mtp2Tp_NodeB	3308
ImVariableMessage	2940	Mtp2Tp_RNC	3313
InmarsatDeviceService	2942	Mtp3bAp_NodeB	3317
Interface	1980	Mtp3bAp_RNC	3319

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Mtp3bSI_NodeB	3321	Radio	630, 1376
Mtp3bSI_RNC	3325	RadioLinks	3474
Mtp3bSp_NodeB	3329	Ranap	3896
Mtp3bSp_RNC	3341	RNC	3912
Mtp3bSrs_NodeB	3352	RNCModule	4031
Mtp3bSrs_RNC	3353	RNCSTAT	631, 1377
Multiplex_Section	575, 1321	RXOTS	638, 1384
NB_MSC	580, 1326	SAE	640, 1386
NbapCommon	3355	SccpAcctCriteria_NodeB	4034
NBCell	614, 1360	SccpAcctCriteria_RNC	4035
Net_BGPPeerIP	2018	SccpAp_NodeB	4036
Net_OSPFArea	2020	SccpAp_RNC	4038
Net_OSPFInterface	2023	Sccpch	4039
Net_OSPFNeighIP	2024	SccpPolicing_NodeB	4041
Network	2025	SccpPolicing_RNC	4042
NniSaalTp_NodeB	3359	SccpSrc_NodeB	4043
NniSaalTp_RNC	3364	SccpSrc_RNC	4047
NodeB	3370	SccpSp_NodeB	4052
NrService	3374	SccpSp_RNC	4059
NSVC	2027	Sctp_NodeB	4067
Os155PhyPathTrm_NodeB	3377	Sctp_RNC	4075
Os155PhyPathTrm_RNC	3380	SecAssoc	2040
Ospf_NodeB	3382	SecAssoc_Card	2042
Ospf_RNC	3384	ServFeature_MSC	644, 1390
OSPFArea	2029	SGSN_GGSN	2045
OspfArea_NodeB	3386	SGSN_MSC	645, 1391
OspfArea_RNC	3388	SpbDeviceGroup_NodeB	4085
OSPFInterface	2032	SpbDeviceGroup_RNC	4087
OspfInterface_NodeB	3390	SpbDeviceSet_NodeB	4088
OspfInterface_RNC	3392	SpbDeviceSet_RNC	4090
OSPFNeighIP	2033	SPNode	647, 1393
PacketDataRouter	3394	SrcClass	2051
PacketDataRouter_RNC	3399	SS7	2053
PdrDevice	3402	SS7Association	2061
PdrDevice_NodeB	3404	SSN	2063
PdrDevice_RNC	3406	Sts1SpeTtp_NodeB	4092
PIU	2034	Sts1SpeTtp_RNC	4094
PlugInUnit_NodeB	3408	Sts3CspeTtp_NodeB	4097
PlugInUnit_RNC	3410	Sts3CspeTtp_RNC	4099
PostServClass	3412	Subcell	652, 1398
Prach	3417	Subsystem_Number	723, 1469
ProblemCode	625, 1371	Super_Channel	726, 1472
QOS	628, 1374	SUPPSERVICE	738, 1484
RA_GSN	2037	Switch_Netw_Terminal	742, 1488
RA_RNC	3444	T1Ttp_NodeB	4103
RABType	3448	T1Ttp_RNC	4106
RACH	3454	T3PhysPathTerm_NodeB	4108

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

T3PhysPathTerm_RNC	4111	primitive calculations	3410
TA_Name	2066	PostServClass	
TCAP_Obj	747, 1493	peg counts	3412
TCAP_SubSystem	751, 1497	primitive calculations	3412
Time_Slot	752, 1498	Prach	
TimeSlot	2068	peg counts	3417
ToneSenderService	4114	primitive calculations	3416
TrafficType	757, 1503	prerequisites	
Transceiver_Group	770, 1516	assumptions in documentation	321
Transcoder_Subpool	789, 1535	primitive calculations	
TransportNetw_NodeB	4115	Aal0TpVccTp_NodeB	2117
TransportNetw_RNC	4118	Aal0TpVccTp_RNC	2121
TRC	791, 1537	Aal1TpVccTp_NodeB	2124
TRD	795, 1541	Aal2Ap_NodeB	2128
Trunk	2071	Aal2Ap_RNC	2142
TrunkRoute	808, 1554	Aal2PathVccTp_NodeB	2156
TsService	4121	Aal2PathVccTp_RNC	2161
UniSaalTp_NodeB	4122	Aal2Sp_NodeB	2165
UniSaalTp_RNC	4127	Aal2Sp_RNC	2167
UplinkBaseBandPool	4132	Aal5TpVccTp_NodeB	2169
UpMfhService	4191	Aal5TpVccTp_RNC	2173
Ura	4192	AddressFamily	1579
UtranCell	4225	Aich	2176
UtranRelation	4598	AmrService	2179
Vc12Ttp_NodeB	4618	AntennaBranch	2181
Vc12Ttp_RNC	4621	APN	1581
Vc4Ttp_NodeB	4623	AppContext_MSC	331
Vc4Ttp_RNC	4626	AtmPort_NodeB	2183
VclTp_NodeB	4629	AtmPort_RNC	2186
VclTp_RNC	4649	BGPPeerIP	1606
VirtualChannel	2093	BillingGtw	1609
VirtualPath	2101	BSC	332
VLR	821, 1567	BSC_NI	451
VpcTp_NodeB	4668	BSC_SS7Dest	451
VpcTp_RNC	4672	BSC_SS7HSLPrmGrp	452
VplTp_NodeB	4676	BSC_SS7Link	469
VplTp_RNC	4678	BSSGP	1612
Vt15Ttp_NodeB	4680	Card	1615
Vt15Ttp_RNC	4683	Carrier	2188
PIU		CcDevice	2285
peg counts	2034	CcDevice_NodeB	2286
primitive calculations	2034	CcDevice_RNC	2289
PlugInUnit_NodeB		Cellset	935
peg counts	3408	CnOperator	2291
primitive calculations	3408	Connection	1667
PlugInUnit_RNC		ContinuityCheckService	2291
peg counts	3410	CsdDigitalService	2293

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

CsdGsmFhService	2304	GsmRelation	2585
CsdModemService	2307	GSN	1696
DataService_MSC	937	GSN_MM_Index	1959
DcDevice	2315	GSN_OvrProtect	1970
DcDevice_NodeB	2317	GSN_SM_Index	1972
DcDevice_RNC	2319	GSNType	1974
DestClass	1670	GttService	2597
Destination	938	Higher_Order_Path	992
DestinationCode	945	HLRSubs	996
DHCP	1672	HsDschResources	2599
DigitalPath_MSC	948	ImaGroup_NodeB	2917
DigPathType_BSC	951	ImaGroup_RNC	2919
DigPathType_MSC	955	ImaLink_NodeB	2920
DirTrunk	956	ImaLink_RNC	2926
Distrib_Group_Switch	969	ImBasicMessage	2932
DLCI	1674	ImDeviceService	2934
DownlinkBaseBandPool	2321	ImMessageComposition	2935
DTISC	973	ImService	2937
DtmfRcvrService	2363	ImVariableMessage	2940
DtmfSenderService	2365	InmarsatDeviceService	2942
E1PhysPathTerm_NodeB	2368	Interface	1974
E1PhysPathTerm_RNC	2371	IP_NodeB	2944
E1Ttp_NodeB	2373	IP_RNC	2948
E1Ttp_RNC	2376	IpAccessHostGpb_NodeB	2952
ECPool	983	IpAccessHostGpb_RNC	2963
ECRouteParameterSet	2379	IpAccessHostMsb_NodeB	2973
ECSERVICE_RNC	2400	IpAccessHostMsb_RNC	2979
EDchResources	2403	IpAccessHostSpb_NodeB	2984
EM	987	IpAccessHostSpb_RNC	2997
EOSCode	989	IpAtmLink_NodeB	3009
Equipment_NodeB	2510	IpAtmLink_RNC	3013
Equipment_RNC	2511	IpbService	3017
EthernetLink_NodeB	2511	IpEthPacketDataRouter	3020
EthernetLink_RNC	2515	IpInterface_NodeB	3023
Etm1_NodeB	2519	IpInterface_RNC	3029
Etm1_RNC	2519	IpSystem_NodeB	3035
Etm4_NodeB	2520	IpSystem_RNC	3035
Etm4_RNC	2520	ISDNESG	998
FastEthernet_NodeB	2521	IubDataStreams	3036
FastEthernet_RNC	2528	IubEdch	3225
ForwardClass	1684	IubLink	3232
FrameSynch	2535	IuLink	3247
GeneralProcUnit_NodeB	2542	IurLink	3250
GeneralProcUnit_RNC	2550	LA	1004
GigaBitEthernet_NodeB	2558	LA_RNC	3270
GigaBitEthernet_RNC	2571	LAPD	1012
Global_Titl_Trans_Typ	990	LATA	1015

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

LossRoute	1016	Os155PhyPathTrm_RNC	3379
Lower_Order_Path	1023	Ospf_NodeB	3382
M3uAssociation_NodeB	3273	Ospf_RNC	3384
M3uAssociation_RNC	3285	OSPFArea	2028
MapOp	1027	OspfArea_NodeB	3386
MccService	3298	OspfArea_RNC	3388
MediumAccUnit_NodeB	3300	OSPFInterface	2031
MediumAccUnit_RNC	3302	OspfInterface_NodeB	3390
MfhService	3304	OspfInterface_RNC	3391
MpcService	3305	OSPFNeighIP	2032
MSC	1032	PacketDataRouter	3393
MSC_SS7Dest	1201	PacketDataRouter_RNC	3398
MSC_SS7HSLPrmGrp	1203	PdrDevice	3402
MSC_SS7Link	1220	PdrDevice_NodeB	3404
MSC_SS7LinkSet	543, 1289	PdrDevice_RNC	3406
MSC_SS7RouteSet	562, 1308	PIU	2034
MSCOutTrunk	564, 1310	PlugInUnit_NodeB	3408
MSCTrunkDest	566, 1312	PlugInUnit_RNC	3410
MSCTrunkType	571, 1317	PostServClass	3412
Mtp2Tp_NodeB	3308	Prach	3416
Mtp2Tp_RNC	3312	ProblemCode	625, 1371
Mtp3bAp_NodeB	3317	QOS	627, 1373
Mtp3bAp_RNC	3319	RA_GSN	2036
Mtp3bSl_NodeB	3320	RA_RNC	3443
Mtp3bSl_RNC	3324	RABType	3446
Mtp3bSls_NodeB	3328	RACH	3454
Mtp3bSls_RNC	3328	Radio	629, 1375
Mtp3bSp_NodeB	3329	RadioLinks	3460
Mtp3bSp_RNC	3340	Ranap	3895
Mtp3bSrs_NodeB	3352	RNC	3898
Mtp3bSrs_RNC	3353	RNCModule	4030
Multiplex_Section	575, 1321	RNCSTAT	630, 1376
NB_MSC	579, 1325	RXOTS	637, 1383
NbapCommon	3354	SAE	640, 1386
NBCell	611, 1357	SAE_Block	643, 1389
Net_BGPPeerIP	2017	SccpAcctCriteria_NodeB	4033
Net_OSPFArea	2020	SccpAcctCriteria_RNC	4034
Net_OSPFInterface	2022	SccpAp_NodeB	4036
Net_OSPFNeighIP	2024	SccpAp_RNC	4037
Network	2025	Sccpch	4038
NI	624, 1370	SccpPolicing_NodeB	4041
NniSaalTp_NodeB	3358	SccpPolicing_RNC	4041
NniSaalTp_RNC	3364	SccpScrc_NodeB	4042
NodeB	3369	SccpScrc_RNC	4047
NrService	3374	SccpSp_NodeB	4051
NSVC	2027	SccpSp_RNC	4059
Os155PhyPathTrm_NodeB	3376	Sctp_NodeB	4067

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

Sctp_RNC	4075	Transcoder_Subpool	789, 1535
SecAssoc	2039	TransportNetw_NodeB	4115
SecAssoc_Card	2041	TransportNetw_RNC	4117
Sector	4083	TRC	790, 1536
ServFeature_MSC	644, 1390	TRD	794, 1540
Service	4083	Trunk	2070
SGSN_GGSN	2043	TrunkRoute	799, 1545
SGSN_MSC	644, 1390	TsService	4120
Slot_NodeB	4084	UniSaalTp_NodeB	4121
Slot_RNC	4084	UniSaalTp_RNC	4126
SpbDeviceGroup_NodeB	4085	UplinkBaseBandPool	4131
SpbDeviceGroup_RNC	4086	UpMfhService	4190
SpbDeviceSet_NodeB	4088	Ura	4192
SpbDeviceSet_RNC	4089	UtranCell	4194
SpDevicePool	4091	UtranRelation	4596
SPG	645, 1391	Vc12Ttp_NodeB	4617
SPNode	646, 1392	Vc12Ttp_RNC	4620
SrcClass	2050	Vc4Ttp_NodeB	4623
SS7	2053	Vc4Ttp_RNC	4626
SS7Association	2060	VclTp_NodeB	4628
SSN	2063	VclTp_RNC	4648
Sts1SpeTtp_NodeB	4091	VirtualChannel	2092
Sts1SpeTtp_RNC	4094	VirtualPath	2101
Sts3CspeTtp_NodeB	4096	VLR	820, 1566
Sts3CspeTtp_RNC	4099	VpcTp_NodeB	4667
Subcell	652, 1398	VpcTp_RNC	4671
Subrack_NodeB	4101	VplTp_NodeB	4675
Subrack_RNC	4102	VplTp_RNC	4677
Subsystem_Number	723, 1469	Vt15Ttp_NodeB	4680
Super_Channel	725, 1471	Vt15Ttp_RNC	4682
SUPPSERVICE	737, 1483	ProblemCode	
Switch_Netw_Terminal	742, 1488	peg counts	625, 1371
Synchr_Digi_paths	743, 1489	primitive calculations	625, 1371
System	744, 1490, 2064, 4102	product support	324
T1Ttp_NodeB	4103	product training	324
T1Ttp_RNC	4105	publications	
T3PhysPathTerm_NodeB	4108	user	323
T3PhysPathTerm_RNC	4111		
TA_Name	2066	Q	
TCAP_Obj	746, 1492	QOS	
TCAP_SubSystem	750, 1496	peg counts	628, 1374
Time_Slot	751, 1497	primitive calculations	627, 1373
TimeSlot	2068		
ToneSenderService	4113	R	
TrafficType	754, 1500	RA_GSN	
TraffOrigin	769, 1515	peg counts	2037
Transceiver_Group	770, 1516	primitive calculations	2036

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

RA_RNC		SccpAp_RNC	
peg counts	3444	peg counts	4038
primitive calculations	3443	primitive calculations	4037
RABType		Sccpch	
peg counts	3448	peg counts	4039
primitive calculations	3446	primitive calculations	4038
RACH		SccpPolicing_NodeB	
peg counts	3454	peg counts	4041
primitive calculations	3454	primitive calculations	4041
Radio		SccpPolicing_RNC	
peg counts	630, 1376	peg counts	4042
primitive calculations	629, 1375	primitive calculations	4041
RadioLinks		SccpScrc_NodeB	
peg counts	3474	peg counts	4043
primitive calculations	3460	primitive calculations	4042
Ranap		SccpScrc_RNC	
peg counts	3896	peg counts	4047
primitive calculations	3895	primitive calculations	4047
RNC		SccpSp_NodeB	
peg counts	3912	peg counts	4052
primitive calculations	3898	primitive calculations	4051
RNCModule		SccpSp_RNC	
peg counts	4031	peg counts	4059
primitive calculations	4030	primitive calculations	4059
RNCRNC	3897	Sctp_NodeB	
RNCSTAT		peg counts	4067
peg counts	631, 1377	primitive calculations	4067
primitive calculations	630, 1376	Sctp_RNC	
RXOTS		peg counts	4075
peg counts	638, 1384	primitive calculations	4075
primitive calculations	637, 1383	SecAssoc	
S		peg counts	2040
SAE		primitive calculations	2039
peg counts	640, 1386	SecAssoc_Card	
primitive calculations	640, 1386	peg counts	2042
SAE_Block		primitive calculations	2041
primitive calculations	643, 1389	Sector	
SccpAcctCriteria_NodeB		primitive calculations	4083
peg counts	4034	ServFeature_MSC	
primitive calculations	4033	peg counts	644, 1390
SccpAcctCriteria_RNC		primitive calculations	644, 1390
peg counts	4035	Service	
primitive calculations	4034	primitive calculations	4083
SccpAp_NodeB		SGSN_GGSN	
peg counts	4036	peg counts	2045
primitive calculations	4036	primitive calculations	2043

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

SGSN_MSC		Sts3CspeTtp_NodeB	
peg counts	645, 1391	peg counts	4097
primitive calculations	644, 1390	primitive calculations	4096
skills required documentation		Sts3CspeTtp_RNC	
assumptions about prior knowledge	321	peg counts	4099
Slot_NodeB		primitive calculations	4099
primitive calculations	4084	Subcell	
Slot_RNC		peg counts	652, 1398
primitive calculations	4084	primitive calculations	652, 1398
software	321	Subrack_NodeB	
SpbDeviceGroup_NodeB		primitive calculations	4101
peg counts	4085	Subrack_RNC	
primitive calculations	4085	primitive calculations	4102
SpbDeviceGroup_RNC		Subsystem_Number	
peg counts	4087	peg counts	723, 1469
primitive calculations	4086	primitive calculations	723, 1469
SpbDeviceSet_NodeB		Super_Channel	
peg counts	4088	peg counts	726, 1472
primitive calculations	4088	primitive calculations	725, 1471
SpbDeviceSet_RNC		support	324
peg counts	4090	SUPPSERVICE	
primitive calculations	4089	peg counts	738, 1484
SpDevicePool		primitive calculations	737, 1483
primitive calculations	4091	Switch_Netw_Terminal	
SPG		peg counts	742, 1488
primitive calculations	645, 1391	primitive calculations	742, 1488
SPNode		Synchr_Digi_paths	
peg counts	647, 1393	primitive calculations	743, 1489
primitive calculations	646, 1392	System	
SrcClass		primitive calculations	744, 1490, 2064, 4102
peg counts	2051	T	
primitive calculations	2050	T1Ttp_NodeB	
SS7		peg counts	4103
peg counts	2053	primitive calculations	4103
primitive calculations	2053	T1Ttp_RNC	
SS7Association		peg counts	4106
peg counts	2061	primitive calculations	4105
primitive calculations	2060	T3PhysPathTerm_NodeB	
SSN		peg counts	4108
peg counts	2063	primitive calculations	4108
primitive calculations	2063	T3PhysPathTerm_RNC	
Sts1SpeTtp_NodeB		peg counts	4111
peg counts	4092	primitive calculations	4111
primitive calculations	4091	TA_Name	
Sts1SpeTtp_RNC		peg counts	2066
peg counts	4094		
primitive calculations	4094		

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

primitive calculations	2066	TsService	
TCAP_Obj		peg counts	4121
peg counts	747, 1493	primitive calculations	4120
primitive calculations	746, 1492	typographical conventions	322
TCAP_SubSystem		U	
peg counts	751, 1497	UniSaaITp_NodeB	
primitive calculations	750, 1496	peg counts	4122
Time_Slot		primitive calculations	4121
peg counts	752, 1498	UniSaaITp_RNC	
primitive calculations	751, 1497	peg counts	4127
TimeSlot		primitive calculations	4126
peg counts	2068	UplinkBaseBandPool	
primitive calculations	2068	peg counts	4132
ToneSenderService		primitive calculations	4131
peg counts	4114	UpMfhService	
primitive calculations	4113	peg counts	4191
TrafficType		primitive calculations	4190
peg counts	757, 1503	Ura	
primitive calculations	754, 1500	peg counts	4192
TraffOrigin		primitive calculations	4192
primitive calculations	769, 1515	user publications	323
training	324	UtranCell	
Transceiver_Group		peg counts	4225
peg counts	770, 1516	primitive calculations	4194
primitive calculations	770, 1516	UtranRelation	
Transcoder_Subpool		peg counts	4598
peg counts	789, 1535	primitive calculations	4596
primitive calculations	789, 1535	V	
TransportNetw_NodeB		Vc12Ttp_NodeB	
peg counts	4115	peg counts	4618
primitive calculations	4115	primitive calculations	4617
TransportNetw_RNC		Vc12Ttp_RNC	
peg counts	4118	peg counts	4621
primitive calculations	4117	primitive calculations	4620
TRC		Vc4Ttp_NodeB	
peg counts	791, 1537	peg counts	4623
primitive calculations	790, 1536	primitive calculations	4623
TRD		Vc4Ttp_RNC	
peg counts	795, 1541	peg counts	4626
primitive calculations	794, 1540	primitive calculations	4626
Trunk		VclTp_NodeB	
peg counts	2071	peg counts	4629
primitive calculations	2070	primitive calculations	4628
TrunkRoute		VclTp_RNC	
peg counts	808, 1554	peg counts	4649
primitive calculations	799, 1545		

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS

primitive calculations	4648
VirtualChannel	
peg counts	2093
primitive calculations	2092
VirtualPath	
peg counts	2101
primitive calculations	2101
VLR	
peg counts	821, 1567
primitive calculations	820, 1566
VpcTp_NodeB	
peg counts	4668
primitive calculations	4667
VpcTp_RNC	
peg counts	4672
primitive calculations	4671
VplTp_NodeB	
peg counts	4676
primitive calculations	4675
VplTp_RNC	
peg counts	4678
primitive calculations	4677
Vt15Ttp_NodeB	
peg counts	4680
primitive calculations	4680
Vt15Ttp_RNC	
peg counts	4683
primitive calculations	4682

Updated: 2008-01-07

PERFORMANCE DATA REFERENCE
Prospect® 8.0 for Ericsson GSM/GPRS/UMTS
