


Virtual Die Tryout

- DI9 -

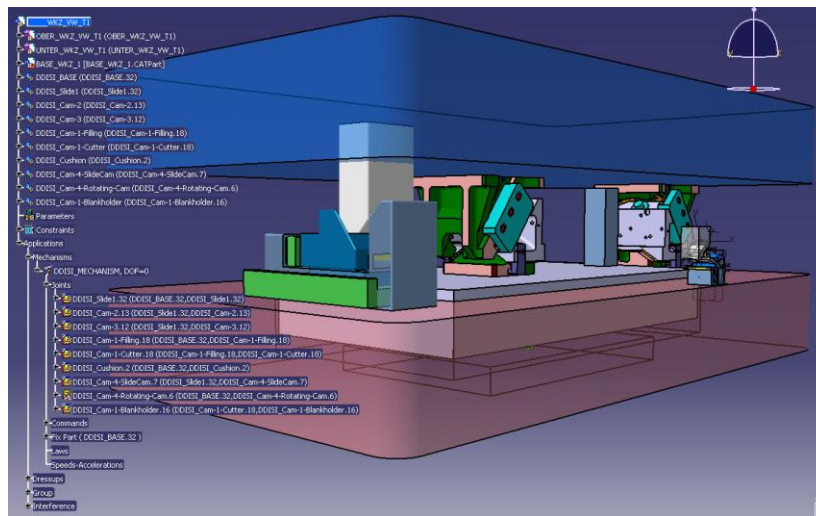

Installation Guide– V1

BPA Delivery 8 for V5R20 (V5.8)

Document internal version number

Table of Contents

| | |
|---------------------------------------------------------------------------|-----------|
| Copyright Notice | 1 |
| Introduction | 2 |
| Related Documentation | 2 |
| Before Installing | 2 |
| Prerequisite for Virtual Die Tryout Installation | 3 |
| Virtual Die Tryout- installation | 4 |
| License Management | 8 |
| Appendix A : Creating a Nodelock file | 8 |
| Appendix B : Enrolling a Concurrent license on the Network license server | 9 |
| Modifying or Uninstalling Virtual Die Tryout | 13 |
| From the Control Panel -> Add or Remove Programs | 13 |
| From the DI9 installer | 13 |
| Troubleshooting | 15 |
| CATIA/DELMIA V5 installation not complete | 15 |

Copyright Notice

© 2010. Dassault Systèmes, All Rights Reserved.

This guide is delivered subject to the following conditions and restrictions:

CONFIDENTIAL - This document contains unpublished, confidential and proprietary information of Dassault Systèmes.

This document or any part thereof shall not be reproduced or transferred to other documents or formats, disclosed to others or used for any purpose other than that for which it is furnished, without the prior written consent of Dassault Systèmes.

It shall be returned to Dassault Systèmes upon request.

Dassault Systèmes is a registered trademark of Dassault Systèmes.

All other trademarks belong to their respective owners.

DELMIA\CATIA is a registered trademark of Dassault Systèmes.

Microsoft Windows and Windows XP are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Introduction

This document describes the installation procedure for the Virtual Die Tryout Business Process Accelerator.

This document is divided into the following sections:

- Virtual Die Tryout Installation
- Modifying or Uninstalling Virtual Die Tryout

Related Documentation

- CATIA V5 – Installation Guide
- DELMIA V5 – Installation Guide

Before Installing

Notes

If you want to install Virtual Die Tryout, you must install DELMIA\CATIA **first**.

When installing, make sure that you have administrator privileges.

Close all other applications on the computer before proceeding with the installation.

Prerequisite for Virtual Die Tryout Installation

DELMIA\CATIA installation is the main prerequisite for DI9 installation. Refer to 'DELMIA\CATIA V5R20SP4 PRODUCT HARDWARE AND SOFTWARE REQUIREMENTS' documentation to obtain all pre requisites regarding DELMIA\CATIA.

The BPA Virtual Die Tryout requires the installation of the following workbenches:

- **CATIA V5 Part Design**
- **CATIA V5 Assembly Design**
- **CATIA V5 DMU Space Analysis**
- **CATIA V5 DMU Kinematics**

Information

The required DELMIA/CATIA version is the R20SP4 minimum

Information

The installation of the DI9 BPA requires that the following software to be installed:

Operating Systems

- Microsoft Windows XP Professional SP3
- Microsoft Windows 7 Professional 64 bit

Software Requirements:

- DELMIA/CATIA V5R20SP4
- Licenses
 - On CATIA V5R20SP4+: Mechanical Design (MD2) + DMU Kinematics (KIN) and DMU Space Analysis (SPA)
 - On DELMIA V5R20SP4+: DPM Shop (SF2) or DPM Review (PR2) or DPM Process Definition (PD2) & DMU Space Analysis (MSA) and Electrical Review (ELR)


Virtual Die Tryout- installation

The Virtual Die Tryout BPA does run on both Windows 32 bits and 64 bits operating systems. The installation procedure is the same on both platform, and will be managed accordingly.


1. Launch Setup.exe




2. Click Next

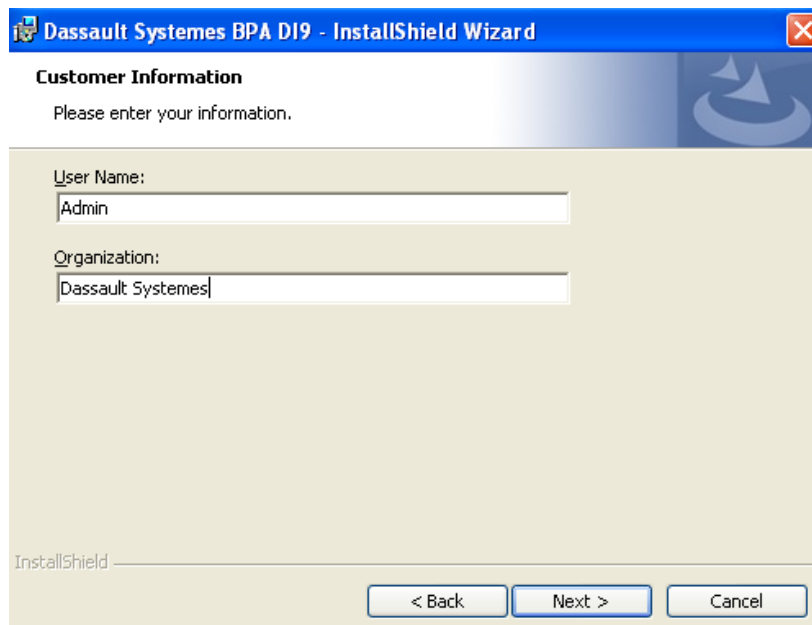


3. Fill Correct User Name and Company Name
4. Click Next
5. Choose Destination Folder Location

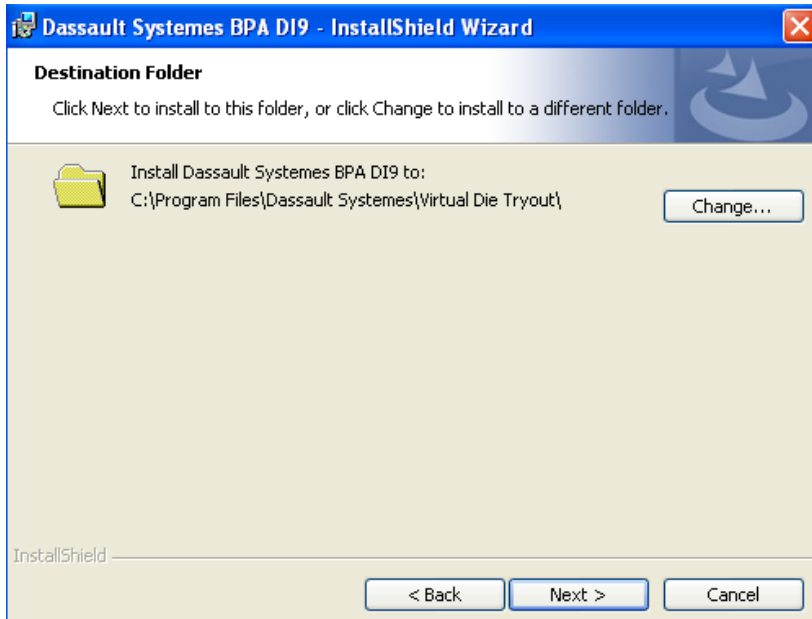

6. Click Next
7. Select CATIA/DELMIA V5R20SP4 Installation Path

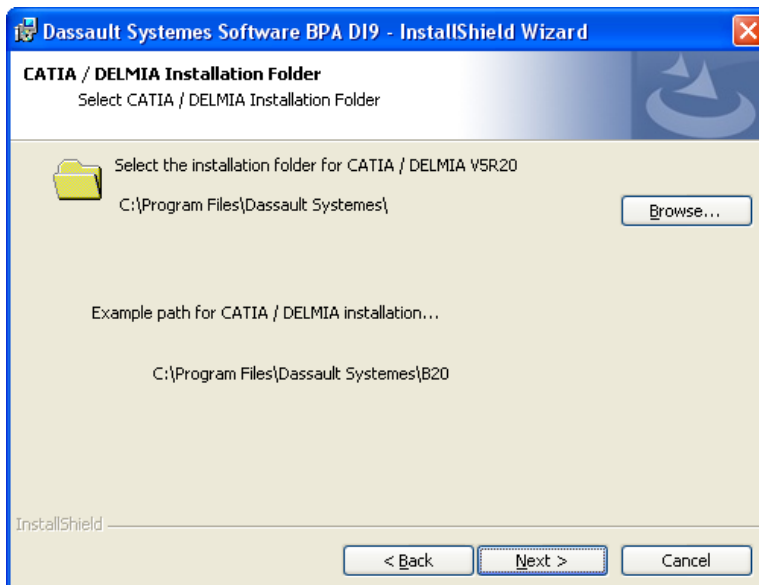

8. Select Next

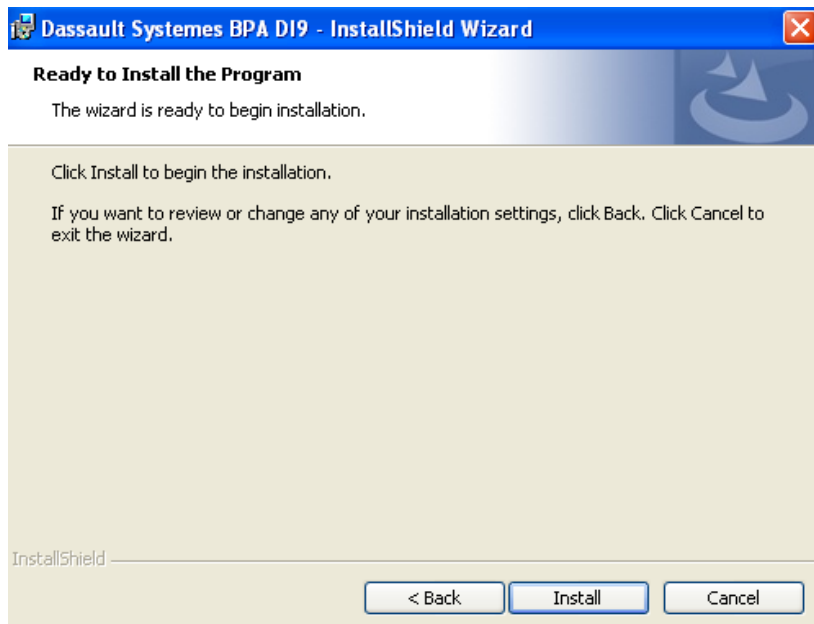

9. Select Install



10. Select Finish

Administrators also have a choice to install/uninstall the BPA through command prompt window

Commands options for msixec

- /i install
- /x uninstall
- /a admin installation.

The msixec can be used to run the installer in different modes like

- silent mode /q
- basic ui mode /qb
- full ui mode

Also msixec logs the progress of an installation which is useful to detect errors if any during installation

- Msiexec [.msi file name] /!v [log file name]

Example:

```
msiexec /i "D:\Installables\intel_a\Dassault Systemes Software BPA DI9.msi" INSTALLDIR="C:\Program Files\Dassault Systemes\VirtualDieTryout" DASSAULT_SYSTEMES_BXX="D:\Program Files\Dassault Systemes\B20" /!v C:\Log.txt /qb
```

Where in:

| PROPERTY NAME | PROPERTY Value | Example |
|-----------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------|
| INSTALLDIR | The Installation Directory for the application | "C:\Program Files\Dassault Systemes\VirtualDieTryout\" |
| DASSAULT_SYSTEMES_BXX | The Installation Directory for the CATIA application (upto Dassault Systemes\B20) | "C:\Program Files\Dassault Systemes\B20" |

License Management

Information

Software Requirements:

- The license server should have IBM LUM 4.6.8.3 installed

Virtual Die Tryout V 5.8 or higher requires a license.

To ask a license, the following information must be provided:

- Product Name: This is the BPA trigram.
- License Type: Nodelock or concurrent.
- Number of License: 1 for Nodelock , >0 for Concurrent
- LUM targetID: Provide the target id (run i4target in a DOS window)
 - On Client side for Nodelock
 - On Server side for Concurrent

On receiving the license:

- For Nodelock type of license
 - Modify/ Create Nodelock file by inserting necessary information (VendorID, ProductPassword) - See Appendix A
- For Concurrent type of license
 - Enroll the license on the LUM server - See Appendix B


Appendix A : Creating a Nodelock file

Nodelock file : how to proceed

You should input yourself the parameters of your License into the nodelock file (create it if doesn't exist)

- This file is located in
 - For Windows XP 32 and 64 OS - C:\Documents and Settings\All Users\Application Data\IBM\LUM\nodelock
 - For Windows 7 64 bit OS - C:\ProgramData\IBM\LUM for WIN7
- You should extract from the .lic file the following informations :
 - VendorID (looks like an UUID)
 - ProductPassword (a crypted key)
 - ProductAnnotation (should be unset)
 - ProductVersion (should be set to 1)
- And insert them in nodelock file by respecting the order
 - # comment : put your BPA trigram and its range date
 - vendorID ProductPassword ProductAnnotation ProductVersion

Example:

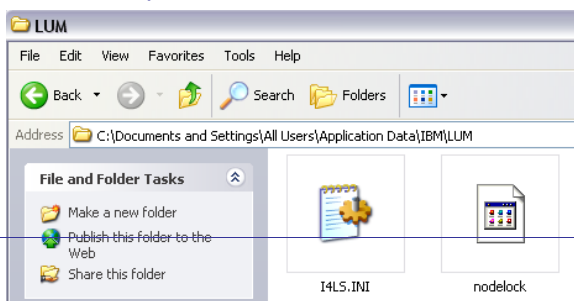

Business Process Accelerator
without a license from Dassault Systèmes
/stèmes, All Rights Reserved.


CP9 from 15-Jul-08 to 14-Jul-09
c6c8ef44bcb7.4a.74.95.13.1f.00.00.00 r8ezikjzgsvk9fzf7fe3p2gn3eaa "" "1"

Appendix B : Enrolling a Concurrent license on the Network license server


Setting up the Network License server:

Start > Programs> License Use Runtime > Configuration tool


- Stop the service if needed using the Service Manager Tool.
- Ensure that the option for Network License Server is selected

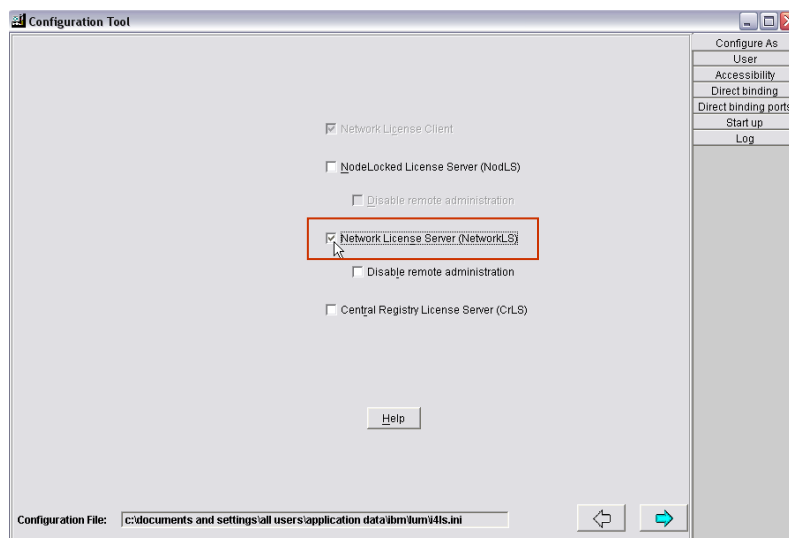


- Switch to the Direct Binding tab.
- In the Name field enter the machine name
- Check the box for NetworkLS and click on Add button

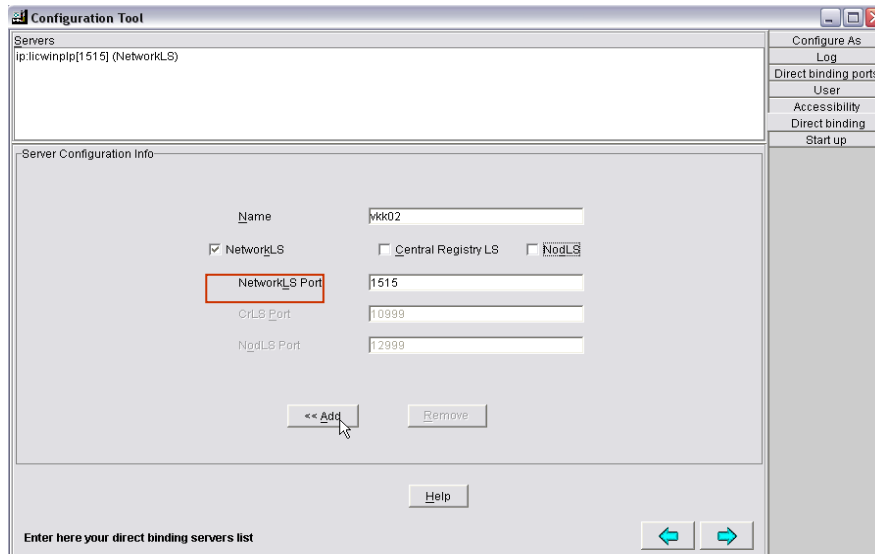

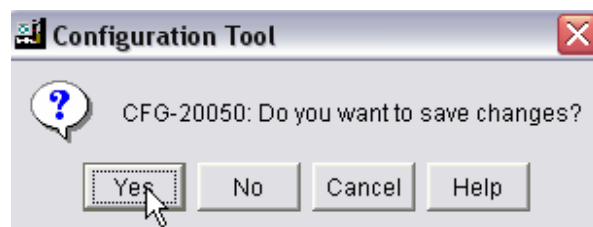

- Close the Configuration Tool window and validate accepting the changes



- Pass the message to restart the service (if previously it was stopped)




| Service Manager Tool | | |
|-----------------------------------------------------------------------------------------------|----------|-------------------------|
| Service | Selected | Options Help |
| Name | Status | Description |
|  ILLMD EXE | Started | Nodelock License Server |
|  I4LMD EXE | Started | Network License Server |


Enrolling the Concurrent License

Start > Programs> License Use Runtime > Basic License Tool

- Select Product / Enroll/
 - Choose Single or Multiple depending on whether you want to enroll a single or multiple licenses at a time.

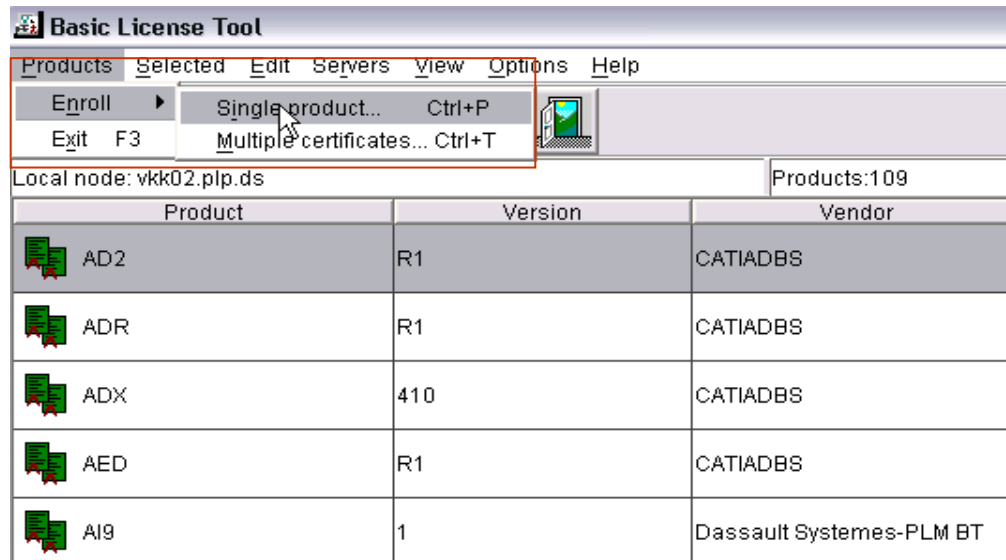

- Click on Import button

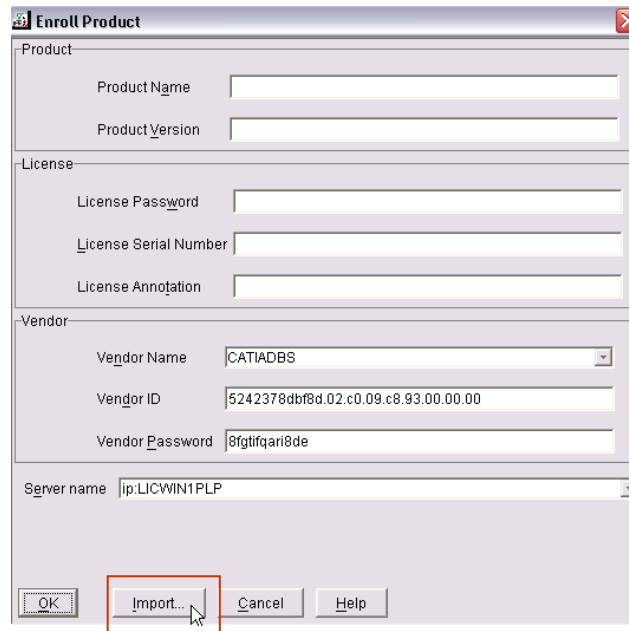


Modifying or Uninstalling Virtual Die Tryout

Un-installation must be run:

From the Control Panel -> Add or Remove Programs

1. Select the *Dassault Systemes Software BPA DI9* application, and click on “Remove”

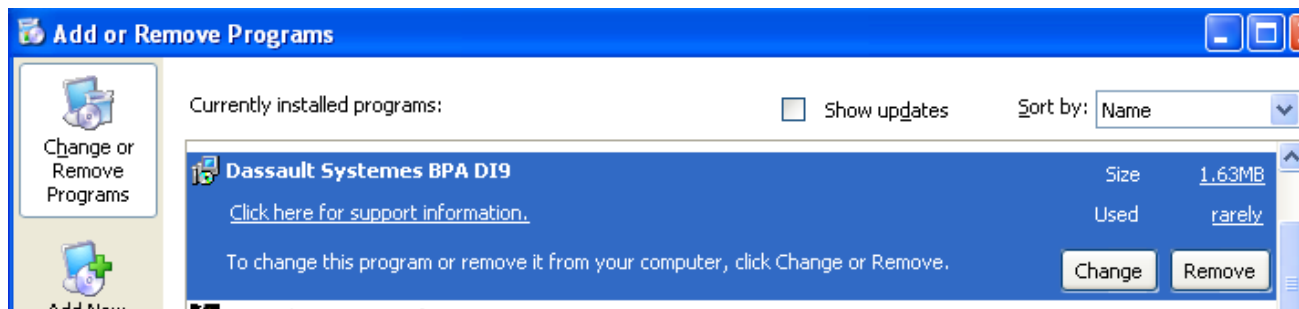


2. DI9 BPA is un-installed.

From the DI9 installer

1. Launch Setup.exe



2. Select Next

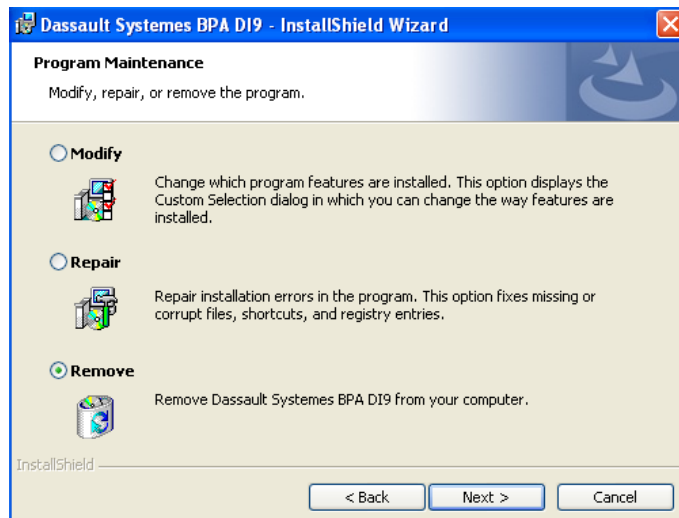


3. Select Remove and then Next

4. DI9 BPA is un-installed.

Troubleshooting

CATIA/DELMIA V5 installation not complete

If, at step 8.0 of the installation procedure, the following error message appears:

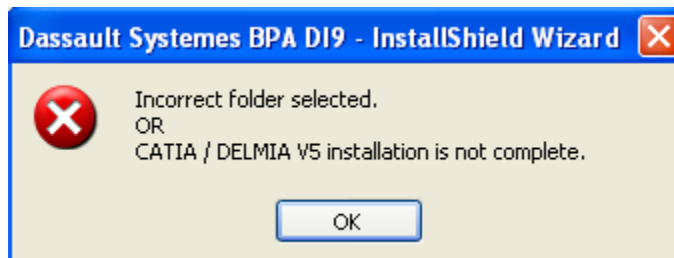

Please make sure that you defined the appropriate path for the CATIA/DELMIA V5R20SP4 installation in the following window:

