



Replacement of Ethernet daughter card retaining clip:

1. Remove the blue plastic clip shown in the picture below. The clip will be discarded, so there is no need to avoid damaging the clip. The clip is held in place by two pegs that have expanding tabs inserted into two holes on the planar. Pulling straight up on the clip will compress the tabs to release the clip.

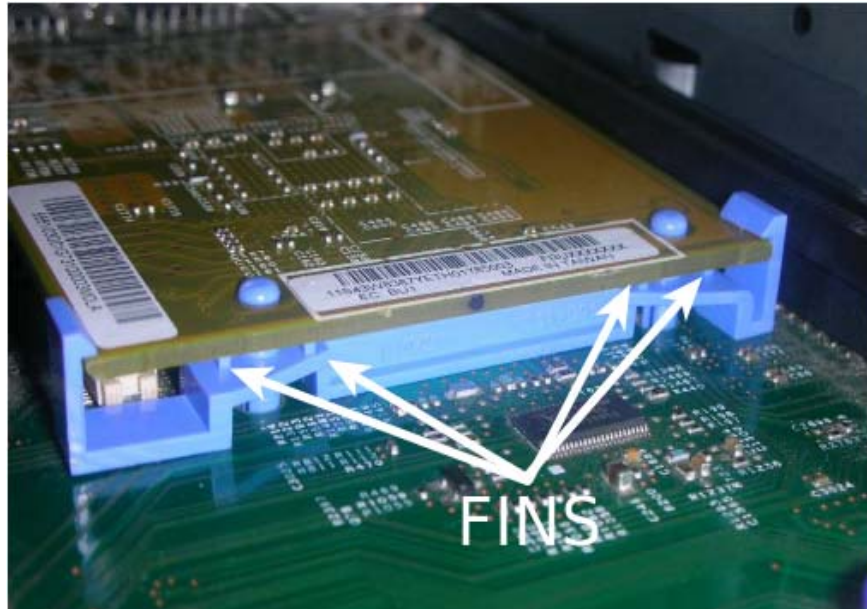

2. Insert a stand-off into each hole as shown below.

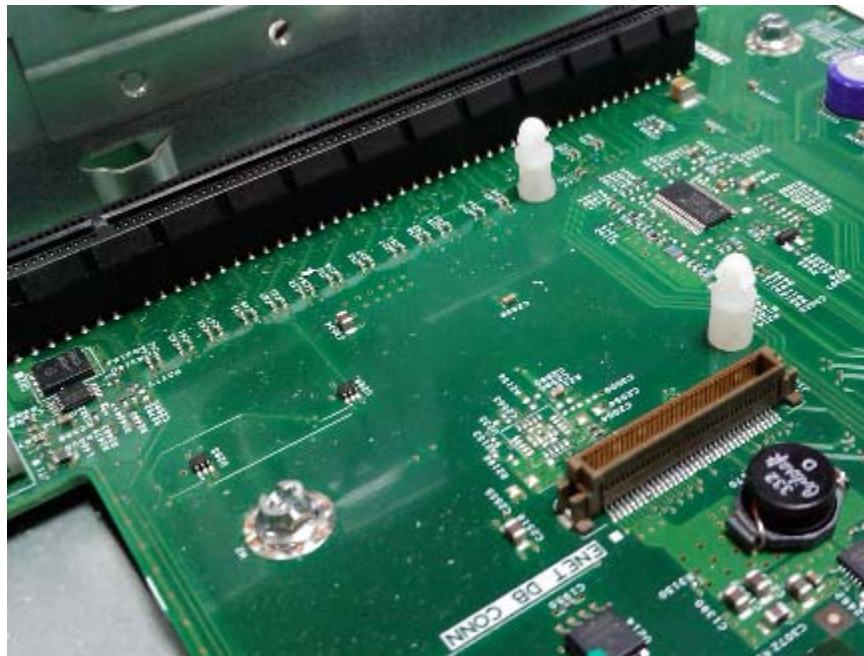

3. Ensure the connector lines up with the planar, then press the Ethernet daughter card into place. The standoffs should securely hold the card in place as shown below.



4. Discard the original retention clip.