



SwitchX 36 Port QSFP Ethernet Switch Installation Guide

P/N:MSX1035B-1BRR, MSX1035B-1SFR, MSX1036B-1BRR, MSX1036B-1SFR

Rev 1.4

NOTE:

THIS HARDWARE, SOFTWARE OR TEST SUITE PRODUCT (“PRODUCT(S)”) AND ITS RELATED DOCUMENTATION ARE PROVIDED BY MELLANOX TECHNOLOGIES “AS-IS” WITH ALL FAULTS OF ANY KIND AND SOLELY FOR THE PURPOSE OF AIDING THE CUSTOMER IN TESTING APPLICATIONS THAT USE THE PRODUCTS IN DESIGNATED SOLUTIONS. THE CUSTOMER'S MANUFACTURING TEST ENVIRONMENT HAS NOT MET THE STANDARDS SET BY MELLANOX TECHNOLOGIES TO FULLY QUALIFY THE PRODUCT(S) AND/OR THE SYSTEM USING IT. THEREFORE, MELLANOX TECHNOLOGIES CANNOT AND DOES NOT GUARANTEE OR WARRANT THAT THE PRODUCTS WILL OPERATE WITH THE HIGHEST QUALITY. ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT ARE DISCLAIMED. IN NO EVENT SHALL MELLANOX BE LIABLE TO CUSTOMER OR ANY THIRD PARTIES FOR ANY DIRECT, INDIRECT, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES OF ANY KIND (INCLUDING, BUT NOT LIMITED TO, PAYMENT FOR PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY FROM THE USE OF THE PRODUCT(S) AND RELATED DOCUMENTATION EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.



Mellanox Technologies
 350 Oakmead Parkway Suite 100
 Sunnyvale, CA 94085
 U.S.A.
www.mellanox.com
 Tel: (408) 970-3400
 Fax: (408) 970-3403

Mellanox Technologies, Ltd.
 Beit Mellanox
 PO Box 586 Yokneam 20692
 Israel
www.mellanox.com
 Tel: +972 (0)74 723 7200
 Fax: +972 (0)4 959 3245

© Copyright 2012. Mellanox Technologies. All Rights Reserved.

Mellanox®, Mellanox logo, BridgeX®, ConnectX®, CORE-Direct®, InfiniBridge®, InfiniHost®, InfiniScale®, PhyX®, SwitchX®, Virtual Protocol Interconnect® and Voltaire® are registered trademarks of Mellanox Technologies, Ltd.

Connect-IB™, FabricIT™, MLNX-OS™, ScalableHPC™, Unbreakable-Link™, UFM™ and Unified Fabric Manager™ are trademarks of Mellanox Technologies, Ltd. All other trademarks are property of their respective owners.

Table of Contents

Table of Contents	3
List of Figures	4
Revision History	5
About this Manual	6
Intended Audience	6
Related Documentation	6
Document Conventions	6
Mellanox Part Numbering Legend	7
Chapter 1 Installing the Switch in the Rack	8
1.1 Minimum and Maximum Rack Depth for these Switches.	8
1.2 Rack Mounting	8
1.2.1 Installation Kits	8
1.2.2 Mechanical Installation	9
1.3 Package Contents and Installation	9
1.3.1 Installing the Switch in the Rack	9
1.3.2 Grounding the Switch	14
1.3.3 Power Connections and Initial Power On	15
Chapter 2 Configuring the Switch	17
2.1 Introduction	17
2.1.1 Configuring the Switch for the First Time	17
2.2 Rerunning the Wizard	22
Chapter 3 Connecting to the Switch Platform	23
3.1 Starting an SSH Connection to the Switch (CLI)	23
3.2 Resetting the Switch	23
Appendix A Transferring the Power Cord	25
Appendix B QSFP Interface	27
Appendix C RJ45 Console and Ethernet Interfaces	29
Appendix D Replacement Parts Ordering Numbers	30

List of Figures

Figure 1:	Rack Rail Kit Parts	10
Figure 2:	Placement of Switch in Rack	11
Figure 3:	Mounting Options	12
Figure 4:	Screwing on the Rail	12
Figure 5:	Inserting the Caged Nuts	13
Figure 6:	Slide the Rail into the Rail Slide	13
Figure 7:	Status LEDs 5 Minutes After Power On	14
Figure 8:	Two Power Inlets - Electric Caution Notifications	16
Figure 9:	Console Port	17
Figure 10:	Reset Button	24
Figure 11:	Transfer Power Cord	25
Figure 12:	Install the Switch Slide	26
Figure 13:	Transfer Power Cord Finished	26

Revision History

Table 1 - Revision History of this Installation Guide

Revision	Date	Details
1.4	August 2012	Converted Visio graphics to Mechanical drawings Added figure 2.
1.3	January 2012	Added SX1016 Switches
1.2	January 2012	Fixed wizards, Added IPv6
1.1	August, 2011	Added one OPN Added QSG to the parts list Added China RoHS to the parts list
1.0	July, 2011	Initial release

About this Manual

This manual describes the installation and set-up instructions of the Mellanox SX10XX switch family.

Intended Audience

This manual is intended for users and system administrators responsible for installing and setting up the switch platform.

Related Documentation

The documentation set accompanying the SX10XX top of rack switch platform includes the following:

Table 2 - Reference Documents

Document Name	Description
<i>Switch Hardware User Manual</i>	This document contains HW descriptions, LED assignments and HW specifications among other things.
<i>Mellanox MLNX-OS SwitchX Software User Manual</i>	This document contains information regarding configuring and managing Mellanox Technologies' SwitchX Switch Platforms.
<i>MLNX-OS Software Command Reference Guide</i>	Command Reference Guide for MLNX-OS listing all of the commands available through MLNX-OS with explanations and examples.
<i>MLNX-OS Software Configuration Guide</i>	Configuration Guide for MLNX-OS displaying different configuration scenarios.

All of these documents can be found on the Mellanox Website. They are available either through the product pages or through the support page with a login of user and password.

Document Conventions

When discussing memory sizes, MB and MBytes are used in this document to mean size in mega bytes. The use of Mb or Mbits (small b) indicates size in mega bits.



This symbol makes recommendations to the user.



This symbol indicates information that is helpful to the user.



This symbol indicates a situation that can potentially cause damage to hardware or software.



BEWARE! This symbol indicates a situation that can potentially cause personal injury or damage to hardware or software.

Mellanox Part Numbering Legend

Mellanox Part Numbering Legend		
Place	Field	Decoder
M		Mellanox Technologies
SX	System Type	SwitchX Switch
P	Protocol	10 = Ethernet
MM	Port and Management Options	35 = 36 ports with Fabric Management 36 = 36 ports internally managed
C	Port Config	B = 40 Gb/s Ethernet
-	Separator	
P	# Power Supplies	0=0, 1=1, 2=2....
F	Form factor	S = standard depth, B = short depth
Y	Air Flow direction	R= Connector side to PSU side airflow F= PSU side to Connector side airflow
R	RoHS	R = RoHS6

1 Installing the Switch in the Rack

1.1 Minimum and Maximum Rack Depth for these Switches.

This switch can be installed in any standard 19" rack with depths of 40cm to 80cm.

Make sure that the Installation kit you have is compatible with your rack.

To use the SwitchX series switch in a rack deeper than 60cm, order the switch with the standard depth, or order the MSX60-SKIT installation kit. The both of these solutions will allow you to install the switch in a 19" rack whose vertical supports are between 60cm and 80cm apart.

1.2 Rack Mounting

The switch platform can be rack mounted and is designed for installation in a standard 19" rack. The power side of the switch includes a hot-swap power supply module, a blank cover for an optional second PSU for redundancy, and a hot-swap fan tray. There are two possible air flow directions. Be sure that the switch air flow direction is compatible with your system, rack, and PSUs. The connector side of the switch has the QSFP ports, system LEDs, and management connection ports.

The switch platform contains auto-sensing 100 - 240 VAC connections for all possible PSUs.

The installer should use a rack capable of supporting the mechanical and environmental characteristics of a fully populated platform.



The rack mounting holes conform to the EIA-310 standard for 19-inch racks. Take precautions to guarantee proper ventilation in order to maintain good airflow at ambient temperature. Cable routing in particular should not impede the air exhaust from the chassis.

1.2.1 Installation Kits

There are two Installation kit options. One long and one short. Both the standard and the short switches can be mounted using the long rail kit. The short kit will only work with the short switch.

See "Mellanox Part Numbering Legend" on page 7 for explanation of the switch depth according to the Model numbers.

Table 3 - Installation Kit According to Rack Size

Kit OPN	Rack Size
MSX60-BKIT	40-60 cm
MSX60-SKIT	60-80 cm

1.2.2 Mechanical Installation

The switch platform can be rack mounted and is designed for installation in a standard 19" rack. The power side of the switch includes a hot-swap power supply module, a blank cover for an optional second PS unit for redundancy, and a hot-swap fan tray. There are two possible air flow directions. Be sure that the switch air flow direction is compatible with your system, rack, and PS units. The connector side of the switch has the QSFP ports, system LEDs, and management connection ports.

The switch platform contains auto-sensing 100 - 240 VAC connections for all possible PS units.

The installer should use a rack capable of supporting the mechanical and environmental characteristics of a fully populated platform.



The rack mounting holes conform to the EIA-310 standard for 19-inch racks. Take precautions to guarantee proper ventilation in order to maintain good airflow at ambient temperature. Cable routing in particular should not impede the air exhaust from the chassis.

1.3 Package Contents and Installation

Before you install your new SX103X switch, unpack the system and check to make sure that all the parts have been sent, check this against the parts list below. Check the parts for visible damage that may have occurred during shipping.

The switch comes packed with the following items:

- 1 X – switch
- 1 X – installation kit
- 1 X – power cable for each PS unit – Type C13-C14
 - See “Replacement Parts Ordering Numbers” on page 30 to order power cords for various countries.
 - A single power cord for each power supply unit can be ordered at no extra charge
- 1 X – Harness
 - HAR000028 – Harness RS232 2M cable – DB9 to RJ-45
- 1 X – Quick Start Guide
- 1 X – China RoHS statement



If anything is damaged or missing, contact your customer representative immediately. For customer support go to:
www.mellanox.com =>Support => Customer Support Portal Login

1.3.1 Installing the Switch in the Rack

Tools and Customer Supplied Parts:


- Phillips Screwdrivers #1 and #2
- Grounding screw
- ESD strap
- Grounding wire sufficient to reach a valid ground.
- ESD mat

For racks from 60cm to 80cm deep either use the standard depth switches with the long rail kit or the short switches with the long rail kit.


Parts included in the rail kit:

- 2 rails
- 2 rail slides
- 2 switch slides
- 16 recessed flat head screws You will have extras!
- 10 caged nuts
- 10 pan head screws M6

Figure 1: Rack Rail Kit Parts

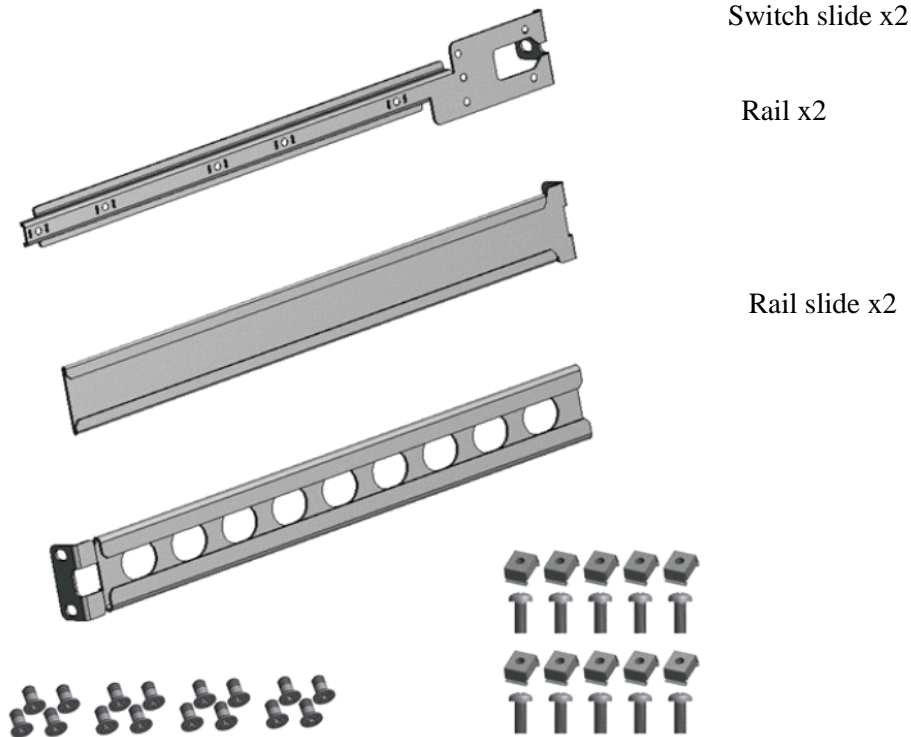


1. Place the ESD mat on the floor where you will be working and put on the ESD strap. Make sure the ESD strap is touching your skin and that the other end is connected to a verified ground.
2. Choose which side of the switch you want even with the rack vertical support. Either the side with the power supply units or the side with the QSFP connectors can be even with one of the vertical rack supports.

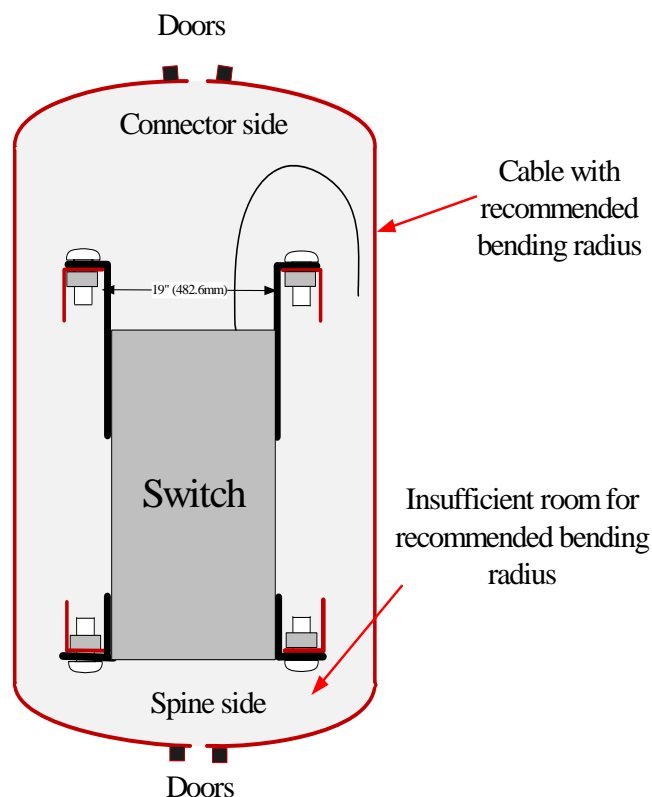Figure 2: Placement of Switch in Rack

Things to consider before choosing where to mount the rails and rail slides.

The distance between the rack and the door can be as little as 4 cm on one side of the rack and as much as 18 cm on the other side of the rack. Keep in mind that there can be as many as 3618 cables connected to the switch.

- Do you want the connector side recessed in the rack to allow for a larger cable bending radius? It is possible to recess the connector side by 5cm by optional placement of the switch rails. See Figure 3, "Mounting Options".
- Will the connector side be recessed past other equipment in the rack and will this be problematic?
- The installation kit allows for a 2" recess of the switch past the vertical support.

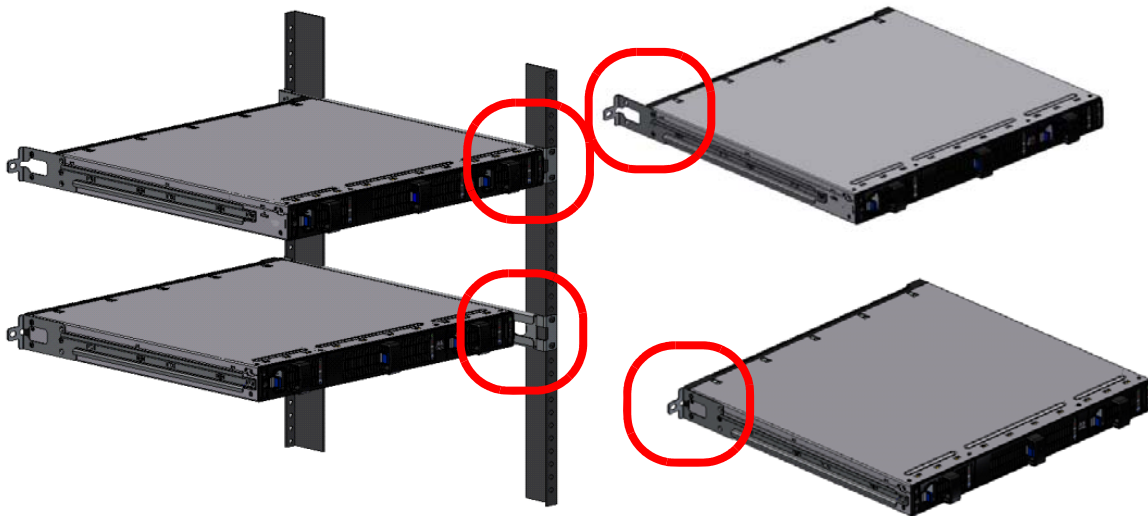
Figure 3: Mounting Options

3. Decide which mounting option you want to use.




To use the rail kit to transfer the power cord from the connector side to the power side go now to **“Transferring the Power Cord”** on page 25.


4. Screw the switch slides onto the switch. Use 5 flat head screws for short switches and 7 screws for standard depth switches, to connect each switch slide.

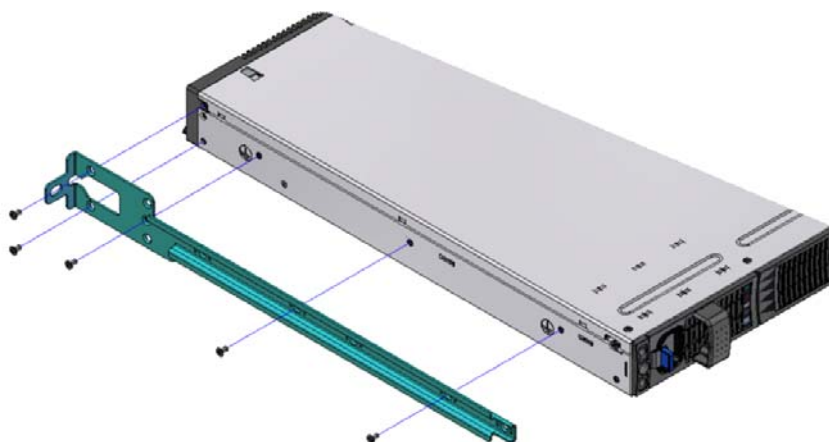Figure 4: Screwing on the Rail

5 screws per side are needed for the short switch
 7 screws per side are needed for the standard switch
 There are 16 screws in the kit; you will have left over screws.

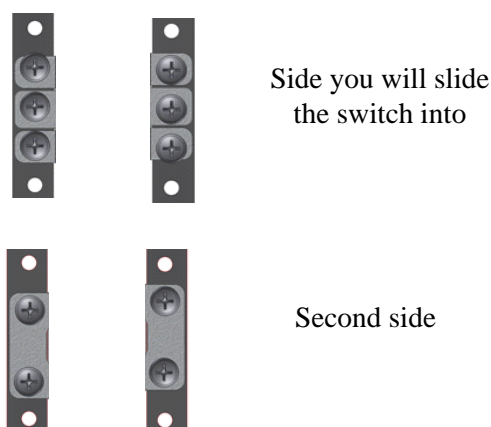Figure 5: Inserting the Caged Nuts


5. Clip 6 caged nuts into the holes in the rack on the side of the rack you will be sliding the switch into. Check that both sides of the switch, power side and connector side, are at the same level in the rack.
6. Clip 4 more caged nuts into the holes on the opposite side of the rack. Check that both sides of the switch, left and right, are the same level in the rack.
7. Slide the rail into the rail slide.
8. Using two of the bolts for each corner install the rails and rail slides in the rack. Do not tighten the bolts yet.

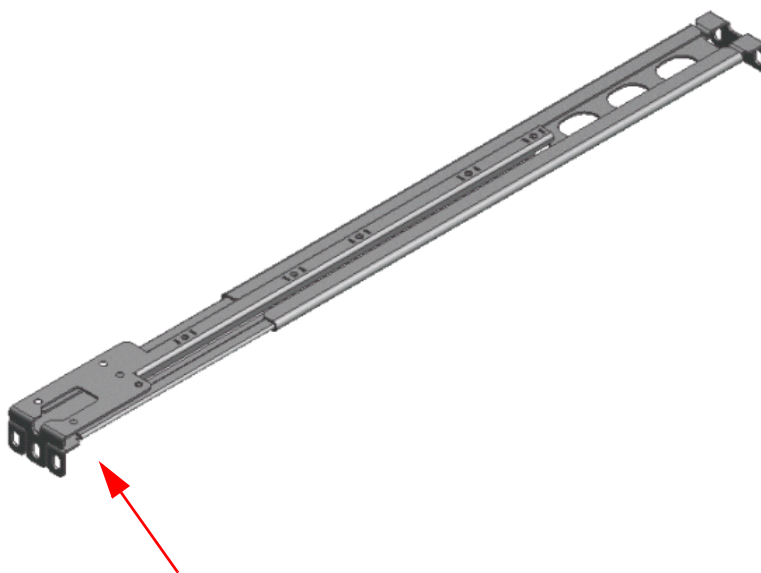Figure 6: Slide the Rail into the Rail Slide

This side of the rail kit goes on the side of the rack you will slide the switch into. This is the same side of the switch that will be next to the vertical support.

9. Slide the switch into the rails.
10. Tighten the bolts to 9.2 Nm or 81.5 pound inches.
11. Put the switch into place and screw the bolts into the nuts. Tighten the bolts to 9.2 Nm or 81.5 pound inches.
12. Ground the switch.
13. Plug in the power cables.
14. Check the Status LEDs and confirm that all of the LEDs show status lights consistent with normal operation.

Figure 7: Status LEDs 5 Minutes After Power On

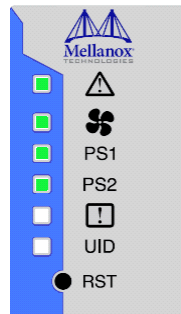


Warning: Any yellow or red status LEDs are cause for concern and must be dealt with immediately.
It can take up to 5 minutes to boot up, during which time the status LED may indicate red.

15. You can start connecting all of the cables to the switch.



FDR and FDR10 are only guaranteed to work with approved Mellanox Cables.



Caution: Slide/rail mounted equipment is not to be used as a shelf or a work space.

1.3.2 Grounding the Switch

Check to determine if your local or national electrical codes require an external ground to all IT components. If so, connect a ground wire to one of the casing screws and connect the other end to a valid ground. If you choose to not use the ground screw, make sure that the rack is properly

grounded and that there is a valid ground connection between the chassis of the switch and the rack. Test the ground using an Ohm meter.



Some national and/or local codes may require IT components to be bonded and externally grounded (not including the power cord ground). You must follow all national and local codes when installing this equipment.

1.3.3 Power Connections and Initial Power On

The switch platform ships with one or two Power Supply Units. For switches with only one unit installed, a second PSU may be installed at a later time. Each supply has a separate AC receptacle. The input voltage is auto-adjusting for 100 - 240 VAC, 50-60Hz power connections. The power cords should be standard 3-wire AC power cords including a safety ground and rated for 15A or higher.



Caution: The switch platform will automatically power on when AC power is applied. There is no power switch. Check all boards, power supplies, and fan tray modules for proper insertion before plugging in a power cable.



Caution: After inserting a power cable and confirming the green system status LED light is on; make sure that the Fan Status indicator shows green. If the fan status indicator is not green then unplug the power connection and check that the fan module is inserted properly and that the mating connector of the fan unit is free of any dirt and/or obstacles.



Caution: When turning off the switch, make sure ALL Connector LEDS are off to ensure a powered down status.



Do not hot swap the power supply if your switch has only one power supply. You must power down the system to replace the power supply unit when there is only one PSU in the switch.

Figure 8: Two Power Inlets - Electric Caution Notifications

CAUTION

Risk of electric shock and energy hazard. The two PSUs are independent.

Disconnect all power supplies to ensure a powered down state inside of the switch platform.

ACHTUNG

Gefahr des elektrischen Schocks. Entfernen des Netzsteckers eines Netzteils spannungsfrei. Um alle Einheiten spannungsfrei zu machen sind die Netzstecker aller Netzteile zu entfernen

ATTENTION

Risque de choc et de danger électriques. Le débranchement d'une seule alimentation stabilisée ne débranchera uniquement qu'un module "Alimentation Stabilisée". Pour isoler complètement le module en cause, il faut débrancher toutes les alimentations stabilisées.


2 Configuring the Switch

2.1 Introduction

The procedures described in this chapter assume that you have already installed and powered-on your switch according to the instructions in the *Switch Installation Guide*, this document.

2.1.1 Configuring the Switch for the First Time

- Step 1.** Connect the host PC to the Console (RJ-45) port of the switch system using the supplied cable. The Console ports for SX10XX systems are shown below as examples.

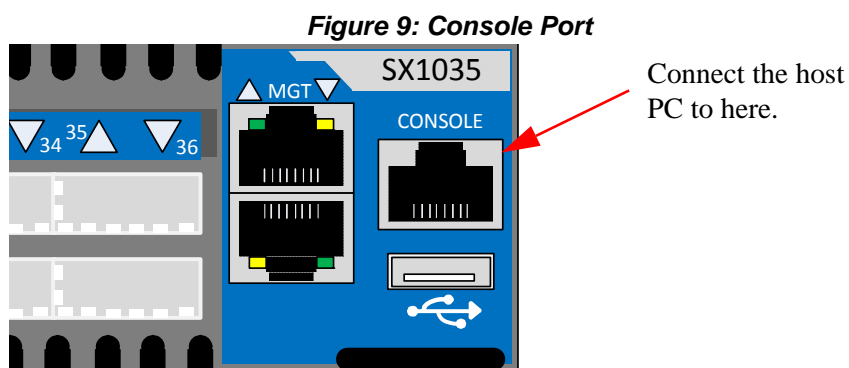

Make sure to connect to the Console RJ-45 port of the switch and not to the (Ethernet) MGT port.



No remote IP connection is available at this stage.

- Step 2.** Configure a serial terminal program (for example, HyperTerminal, minicom, or Tera Term) on your host PC with the settings described in [Table 4](#).

Table 4 - Serial Terminal Program Configuration

Parameter	Setting
Baud Rate	9600
Data bits	8
Stop bits	1
Parity	None

Table 4 - Serial Terminal Program Configuration (Continued)

Parameter	Setting
Flow Control	None

Step 3. Login (from a serial terminal program) as *admin* and use *admin* as password. This starts the Mellanox configuration wizard.

Step 4. Go through the Mellanox configuration wizard. Table 5 shows an example of a wizard session.

Table 5 - Configuration Wizard Session - IP Configuration by DHCP (Sheet 1 of 2)

Wizard Session Display (Example)	Comments
Mellanox configuration wizard Do you want to use the wizard for initial configuration? yes	You must perform this configuration the first time you operate the switch or after resetting the switch. Type 'y' and then press <Enter>.
Step1: Hostname? [switch-1]	If you wish to accept the default hostname, then press <Enter>. Otherwise, type a different hostname and press <Enter>.
Step 2: Use DHCP on mgmt0 interface? [no]	Perform this step to obtain an IP address for the switch. (eth0 is the management port of the switch.) If you wish the DHCP server to assign the IP address, type 'yes' and press <Enter>. If you type 'no' (no DHCP), then you will be asked whether you wish to use the 'zeroconf' configuration or not. If you enter 'yes' (yes Zeroconf), the session will continue as shown in Table 6. If you enter 'no' (no Zeroconf), then you need to enter a <i>static</i> IP, and the session will continue as shown in Table 7.
Step 3: Enable IPv6? [yes] yes	The management interface will be able to use IPv6 addresses.
Step 4: Enable IPv6 autoconfig (SLAAC) on mgmt0 interface? [no] no	This turns on autoconfiguration of the IPv6 addresses. This is unsuitable for DHCPv6.

Table 5 - Configuration Wizard Session - IP Configuration by DHCP (Sheet 2 of 2)

Wizard Session Display (Example)	Comments
<p>Step 5: Admin password (Press <Enter> to leave unchanged)? <new_password> Step 6: Confirm admin password? <new_password></p>	<p>To avoid illegal access to the machine, please type a password and then press <Enter>. Then confirm the password by re-entering it.</p> <p>Note that password characters are <i>not</i> printed.</p>
<p>You have entered the following information:</p> <ol style="list-style-type: none"> 1. Hostname: <switch name> 2. Use DHCP on mgmt0 interface: yes 3. Enable IPv6: yes 4. Enable IPv6 autoconfig (SLAAC) on mgmt0 interface: no 5. Admin password (Enter to leave unchanged): (CHANGED) <p>To change an answer, enter the step number to return to. Otherwise hit <enter> to save changes and exit.</p> <p>Choice: <Enter></p> <p>Configuration changes saved. To return to the wizard from the CLI, enter the “configuration jump-start” command from configuration mode. Launching CLI...</p> <p><switch name> [></p>	<p>The wizard displays a summary of your choices and then asks you to confirm the choices or to re-edit them.</p> <p>Either press <Enter> to save changes and exit, or enter the configuration step number that you wish to return to.</p> <p>Note: To run the command “configuration jump-start” you must be in Config mode.</p>

Table 6 - Configuration Wizard Session - IP Zeroconf Configuration

Wizard Session Display - IP Zeroconf Configuration (Example)
<p>Mellanox configuration wizard</p> <p>Do you want to use the wizard for initial configuration? y</p> <p>Step 1: Hostname? [switch-112126]</p> <p>Step 2: Use DHCP on mgmt0 interface? [yes] no</p> <p>Step 3: Use zeroconf on mgmt0 interface? [no] yes</p> <p>Step 4: Default gateway? [For example:192.168.10.1]</p> <p>Step 5: Primary DNS server?</p> <p>Step 6: Domain name?</p> <p>Step 7: Enable IPv6? [yes] yes</p> <p>Step 8: Enable IPv6 autoconfig (SLAAC) on mgmt0 interface? [no] no</p> <p>Step 9: Admin password (Enter to leave unchanged)?</p> <p>Step 9: Confirm admin password? (Enter to leave unchanged)?</p> <p>You have entered the following information:</p> <ol style="list-style-type: none"> 1. Hostname: switch-112126 2. Use DHCP on mgmt0 interface: no 3. Use zeroconf on mgmt0 interface? [no] yes 4. Default gateway: 192.168.10.1 5. Primary DNS server: 6. Domain name: 7. Enable IPv6: yes 8. Enable IPv6 autoconfig (SLAAC) on mgmt0 interface: no 9. Admin password (Enter to leave unchanged): (unchanged) <p>To change an answer, enter the step number to return to. Otherwise hit <enter> to save changes and exit.</p> <p>Choice:</p> <p>Configuration changes saved.</p> <p>To return to the wizard from the CLI, enter the "configuration jump-start" command from configure mode. Launching CLI...</p> <p>switch-1 ></p>

Table 7 - Configuration Wizard Session - Static IP Configuration

Wizard Session Display - Static IP Configuration (Example)
<p>Mellanox configuration wizard</p> <p>Do you want to use the wizard for initial configuration? y</p> <p>Step 1: Hostname? [switch-112126]</p> <p>Step 2: Use DHCP on mgmt0 interface? [yes] n</p> <p>Step 3: Use zeroconf on mgmt0 interface? [no]</p> <p>Step 4: Primary IP address? [for example 192.168.10.4] Mask length may not be zero if address is not zero (interface eth0)</p> <p>Step 5: Netmask? [0.0.0.0] 255.255.255.0</p> <p>Step 6: Default gateway? [for example 192.168.10.1]</p> <p>Step 7: Primary DNS server?</p> <p>Step 8: Domain name?</p> <p>Step 9: Enable IPv6? [yes] yes</p> <p>Step 10: Enable IPv6 autoconfig (SLAAC) on mgmt0 interface? [no] no</p> <p>Step 11: Admin password (Enter to leave unchanged)?</p> <p>You have entered the following information:</p> <ol style="list-style-type: none"> 1. Hostname: switch-112126 2. Use DHCP on mgmt0 interface: no 3. Use zeroconf on mgmt0 interface: no 4. Primary IP address: 192.168.10.4 5. Netmask: 255.255.255.0 6. Default gateway: 192.168.10.1 7. Primary DNS server: 8. Domain name: 9. Enable IPv6: yes 10. Enable IPv6 autoconfig (SLAAC) on mgmt0 interface: no 11. Admin password (Enter to leave unchanged): (unchanged) <p>To change an answer, enter the step number to return to. Otherwise hit <enter> to save changes and exit.</p> <p>Choice:</p> <p>Configuration changes saved.</p> <p>To return to the wizard from the CLI, enter the "configuration jump-start" command from configure mode. Launching CLI...</p> <p>switch-1 ></p>

Step 5. Before attempting a remote (for example, SSH) connection to the switch, check the mgmt0 interface configuration. Specifically, verify the existence of an IP address. To check the current mgmt0 configuration, enter the following commands:

```

sx-43 [standalone: master] > enable
sx-43 [standalone: master] # show interfaces mgmt0

```

The following is an example of the output:

```

Interface mgmt0 state

  Admin up:          yes
  Link up:           yes
  IP address:        192.168.10.43
  Netmask:           255.255.255.0
  Speed:             1000Mb/s (auto)
  Duplex:            full (auto)
  Interface type:    ethernet
  Interface source:  physical
  MTU:               1500
  HW address:        00:02:C9:11:2A:AE
  Comment:

RX bytes:           1343502058      TX bytes:           313920869
RX packets:          17589211      TX packets:          992717
RX mcast packets:    0             TX discards:         0
RX discards:         0             TX errors:           0
RX errors:           0             TX overruns:         0
RX overruns:         0             TX carrier:          0
RX frame:            0             TX collisions:       0
                                   TX queue len:    1000

```

2.2 Rerunning the Wizard

If you want to rerun the wizard run the following commands:

```

sx-43 [standalone: master] > enable
sx-43 [standalone: master]# configure terminal
sx-43 [standalone: master]# configuration jump-start

```

3 Connecting to the Switch Platform

3.1 Starting an SSH Connection to the Switch (CLI)

- Step 1.** Set up an Ethernet connection between the switch and a local network machine (“the remote machine” henceforth) using a standard RJ-45 connector.
- Step 2.** Connect to the remote machine (*rem_mach1* is used as an example).
- Step 3.** Start a remote shell to the switch using the following command using `<switch_IP_address>` is the IP address of the switch.

```
rem_mach1 > ssh -l <username> <switch ip address>

Mellanox MLNX-OS Switch Management

Password:
Last login: Thu Apr 28 11:24:13 2011 from 192.168.10.1

Mellanox Switch

sx-43 [standalone: master] >
```

- Step 4.** You can enter any supported command now.

3.2 Resetting the Switch


On the connector side panel under the system LEDs is a reset button. This reset button requires a tool to be pressed.



DO NOT use a sharp pointed object such as needle or push pin for pressing the Reset button. Sharp objects can cause damage, use a flat object to press this reset button.

Figure 10: Reset Button

Press the reset button to reset the main and management CPUs and to delete the existing password.

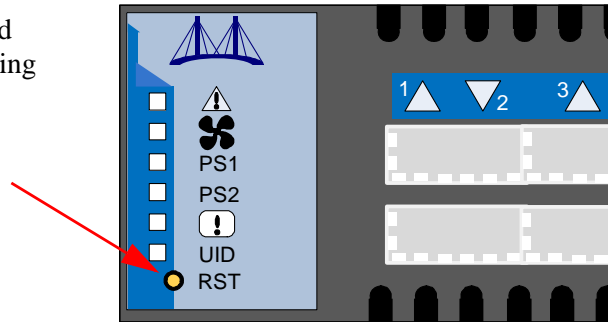

This button resets both the CPU of the switch device and the CPU of the management module. It thereby resets all of the ports by bringing them down and powering them up when the button is pushed. A quick push of this button performs this reset. When the button is held down for 15 seconds the switch is reset and the password is deleted. You will then be able to enter without a password and make a new password for the user admin.


The SwitchX Series User Manuals can be found at:
<http://www.mellanox.com>

Appendix A: Transferring the Power Cord

To use the rail kit to transfer the power cord from the connector side to the power side follow these directions. Do you want to install power cords on both sides of the switch or only one side? For each power cord you want to transfer:

1. Once you have decided which side of the switch will be next to the vertical support?
2. Make sure that you place the cord so that the correct end of the cord will be at the power side of the switch. This will depend on which of the four mounting options you choose.

Figure 11: Transfer Power Cord

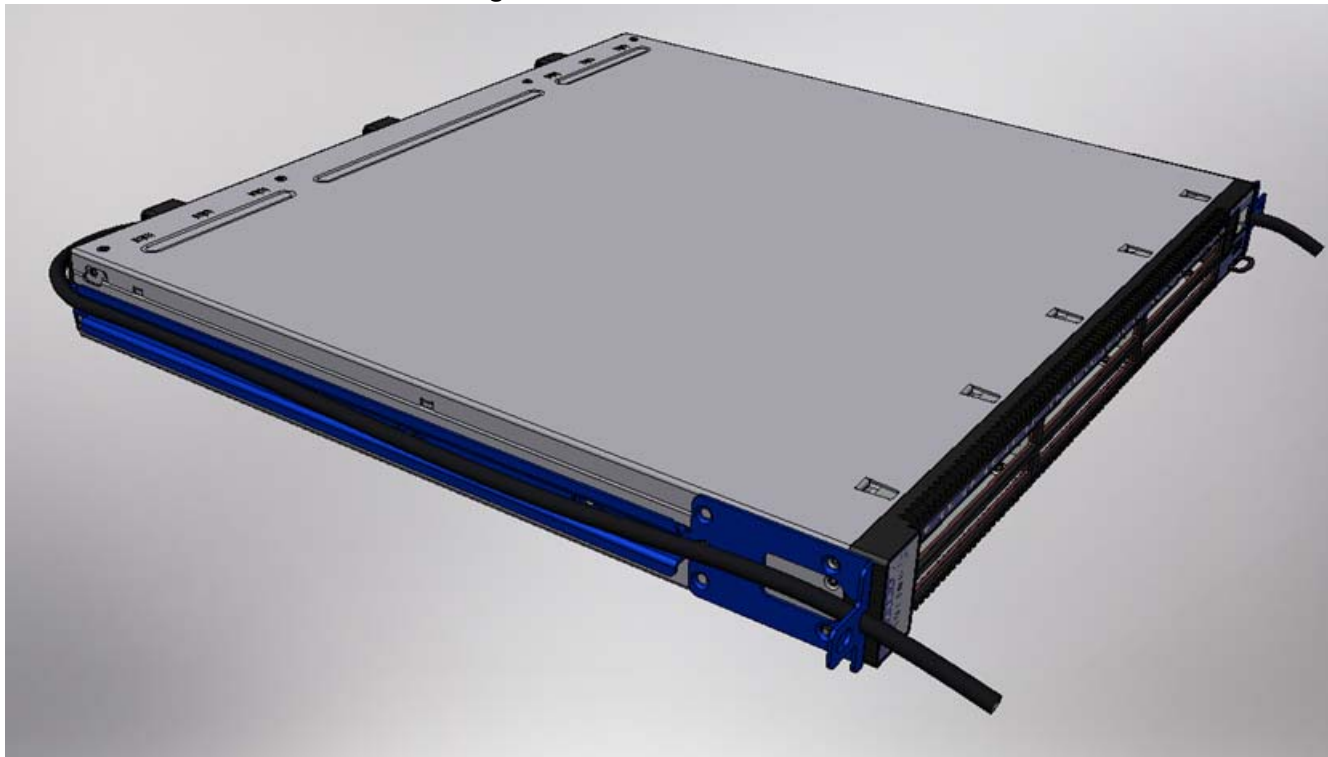

3. Put the power cord in the switch slide channel.
4. Screw the switch slides to the switch.

Figure 12: Install the Switch Slide



Figure 13: Transfer Power Cord Finished




5. Return to step 4 on page 12 and continue the installation.

Appendix B: QSFP Interface

20	GND	GND	19
21	Rx2n	Rx1n	18
22	Rx2p	Rx1p	17
23	GND	GND	16
24	Rx4n	Rx3n	15
25	Rx4p	Rx3p	14
26	GND	GND	13
27	ModPrsL	SDA	12
28	IntL	SCL	11
29	VccTx	Vcc Rx	10
30	Vcc1	ResetL	9
31	LPMODE	ModSelL	8
32	GND	GND	7
33	Tx3p	Tx4p	6
34	Tx3n	Tx4n	5
35	GND	GND	4
36	Tx1p	Tx2p	3
37	Tx1n	Tx2n	2
38	GND	GND	1

Table 8 - QSFP Connector Pinout

Connector Pin Number	Connector Pin Name	Signal Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground
20	GND	Ground
21	Rx2n	Receiver Inverted Data Output 3
22	Rx2p	Receiver Non-Inverted Data Output 3
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output 3
25	Rx4p	Receiver Non-Inverted Data Output 3
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt
29	Vcc Tx	+3.3 V Power supply transmitter
30	Vcc 1	+3.3 V Power Supply
31	LPMODE	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

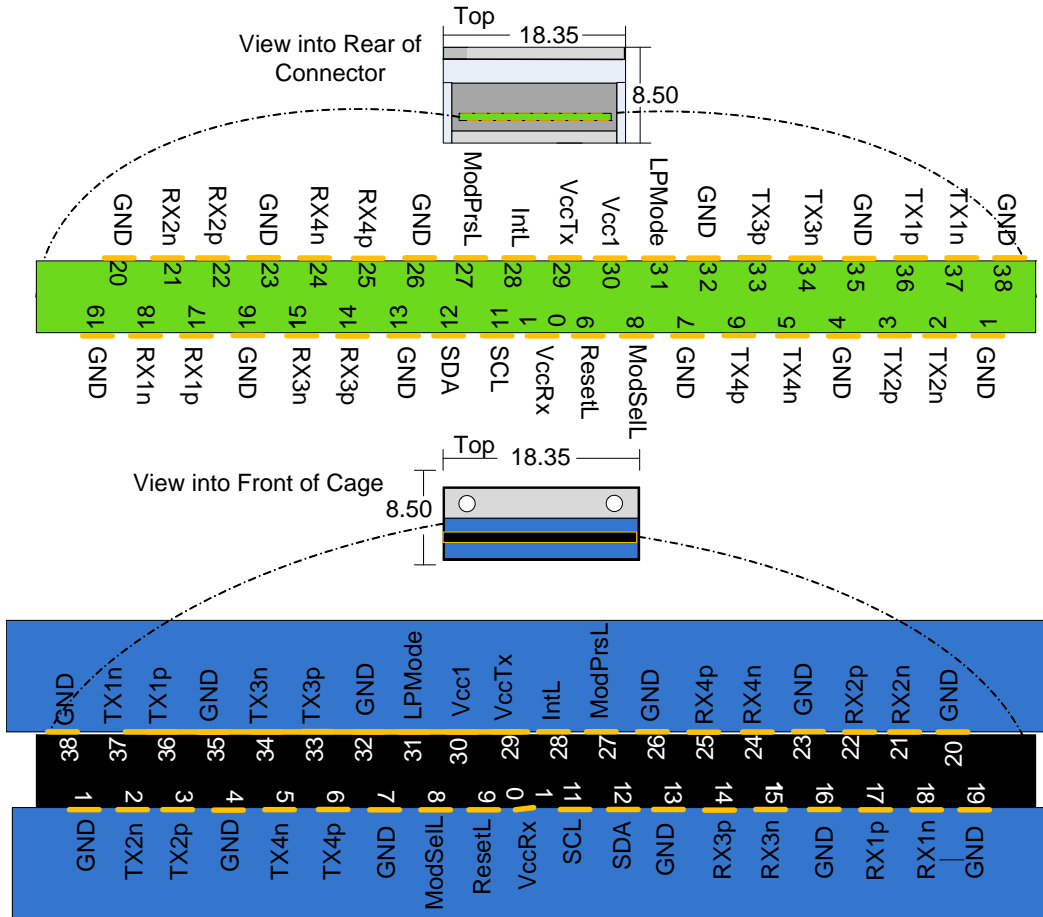

Appendix C: RJ45 Console and Ethernet Interfaces

The RJ45 Console and Ethernet interfaces uses the EIA 568A standard wiring color coding.

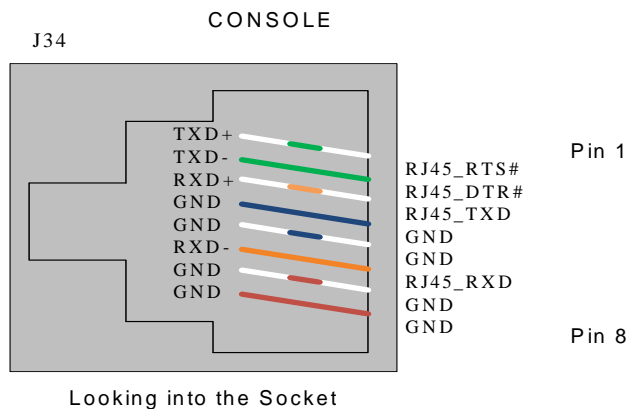


Table 9 - RJ45 Pinout

Connection	Signal	Pin#	Color
TXD+	RJ45_RTS#	1	G/W
TXD-	RJ45_DTR#	2	G
RXD+	RJ45_TXD	3	O/W
GND	GND	4	Bl
GND	GND	5	Bl/W
RXD-	RJ45_RXD	6	O
GND	GND	7	Br/w
GND	GND	8	Br

Appendix D: Replacement Parts Ordering Numbers

Table 10 - Replacement Parts Ordering Numbers

Part Description	OPN
I2C DB9 or RJ45 to USB Adapter	MTUSB-1
Fan module with power supply side to connector side air flow	MSX60-FF
Fan module with connector side to power supply side air flow	MSX60-FR
300W Power Supply w/ Power Supply Side to Connector side air flow	MSX60-PF
300W Power Supply w/ Connector side to Power Supply side air flow	MSX60-PR
Power cord Type C13-C14	ACC000251
Power cord Type B for USA, Canada, Mexico, Taiwan	ACC000204
Power cord Type H for Israel	ACC000205
Power cord Type E/F for Sweden, France, Germany, Netherlands, Russia	ACC000207
Power cord Type G for UK	ACC000208
Power cord Type D for India	ACC000209
Power cord Type I for China	ACC000210
Power cord Type J for Switzerland	ACC000211
Power cord Type B for Japan,	ACC000212
Power cord Type I for Australia	ACC000213
Installation Kit for short switches in racks 40-60 cm deep	MSX60-BKIT
Installation Kit for short or standard switches in racks 60-80 cm deep	MSX60-SKIT