

SmarTeam CATIA Supply Chain Engineering

User's Guide

Version 5 Release 20 SP2



Overview

Conventions

What's New?

Getting Started

Displaying the Reconcile Window

Identifying the Targeted SmarTeam Documents

Defining Reconciliation Rules

Applying Reconciliation Rules

Saving and Checking In all the Documents in SmarTeam

User Tasks

Identifying SmarTeam Documents

Performing a Query by Latest Available Revision

Performing an Interactive Query

Performing an Easy Query

Identifying the Documents Globally

Undoing Document Mapping

Defining Reconciliation Rules

Defining the Reconciliation Rule You Need

Automating the Valuation of Reconciliation Rules

Resetting Reconciliation Rules

Using Reconciliation Tools

Managing Broken Links

Using the Locate Tool

Using the Sort Tool

Using the Viewers

Showing Profile Cards

Automating Reconciliations Using the Automatic Preselection Command

Automating Reconciliations Using the CATStiReconcileBatch Tool

Generating a Reconciliation Report

Interface Description

Actions Toolbar

CATIA View Tab

Query, Global Set Tabs

List View, 3D Viewer and CATIA 2D View Tabs

Customizing

Customizing your Environment

Customizing Reconciliator Queries

Customizing Easy Queries

Customizing Query Results Display

Customizing Report Layouts

[Creating a Link for Tracking Documents with New Identifiers](#)
[Customizing Pre-V5R18 Databases to use Automatic Pre-selection](#)
[Customizing your Environment for Reconciling ENOVIA Data](#)

Methodology

[Exporting Data](#)
[Internal Intellectual Property \(I.P.\) Protection](#)
[Exchanging Modified Documents Only](#)
[Reconciling ENOVIA Data with SmarTeam Documents](#)
[Reconciling ENOVIA Data Saved in Structured Exposed Mode](#)
[Reconciling an Assembly Containing a Contextual Part](#)

Glossary

Index

Overview

This book is intended for users who need to become quickly familiar with the ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange application.

This overview provides the following information:


- [SmarTeam-CATIA Supply Chain Engineering Exchange in a Nutshell](#)
- [Before Reading this Guide](#)
- [Getting the Most out of this Guide](#)
- [Accessing sample documents](#)
- [Conventions Used in this Guide](#)

ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange in a Nutshell

In the manufacturing industry, suppliers are greatly involved in the design and the manufacturing of goods. Since early design, manufacturers (OEM) need to exchange data with their suppliers. This design and manufacturing process is becoming more and more global in nearly all industries.

- The OEMs need to extract information from their information systems such as CAD documents, assembly structures, drawings and part definitions, to enable suppliers to receive the working context (such as a part of the 3D representation of a car) and/or a set of documents that will need to be updated.
- The suppliers send the result of their work with updated or new CATIA documents, assembly structures, drawings or applicative data (kinematics, numerical command) to the OEMs.
- The OEMs re-import this data into the corporate information systems.

Many companies use CATIA in collaboration with SmarTeam. Depending on the information semantic that needs to be exchanged, several tools are available. In case the CATIA design needs to be shared between the supplier and OEM, CATIA native files are exchanged between the OEM and the supplier. The SmarTeam Reconciliator makes it possible to interactively compare and reconcile a set of CATIA documents coming from an OEM or supplier with documents stored in a targeted SmarTeam installation.

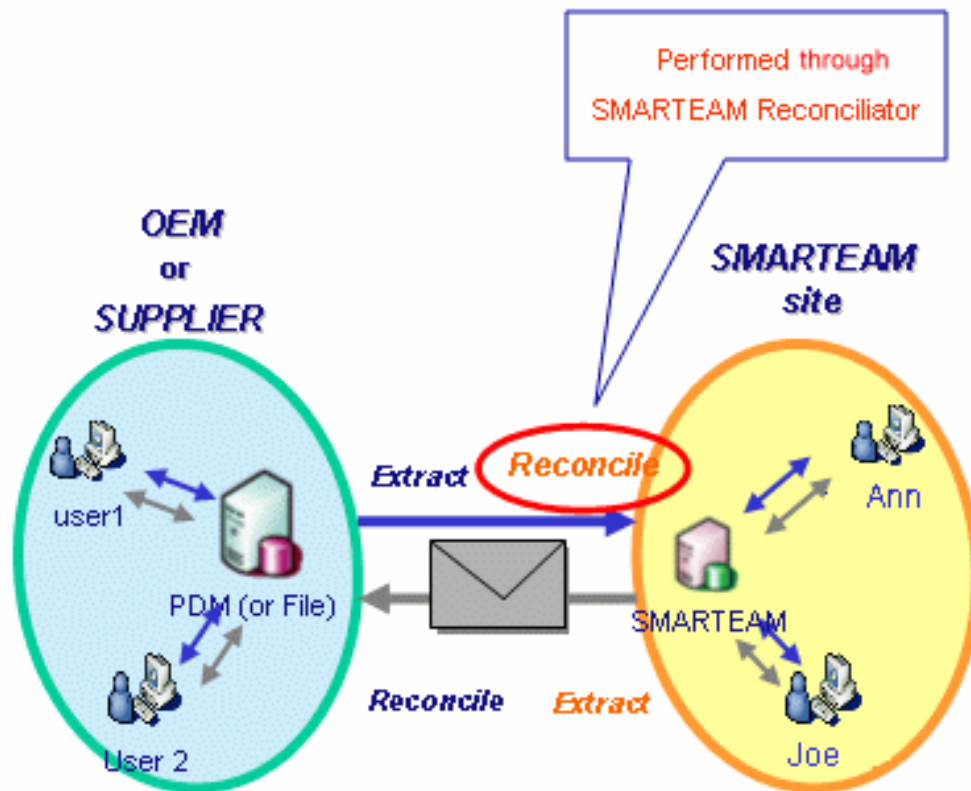

ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange (SEE) makes it possible to interactively compare and reconcile a set of CATIA documents coming from an OEM or supplier with documents stored in a targeted SmarTeam installation. The reconciliation process starts with the loading of the source in CATIA V5, then enables to identify documents which are common between source and target, then compare them. Finally, as a decision support tool, it enables to manage the trade off between source and target. This is done while maintaining links consistency and data integrity regardless of the source.

The graphical interface is flexible and intuitive and very productive. End user interactions can be minimized by the reconciliation business rules integrated in SEE. They can be enriched by an easy customization. By supporting heterogeneous OEM's or supplier's environments (e.g. SmarTeam, ENOVIA V5 VPM, ENOVIA VPM - note that in the case of ENOVIA V5 VPM or ENOVIA VPM, the source document can be the result of the extraction of a "structure exposed" assembly-, file-based systems, etc.), SEE provides a valuable solution for key business scenarios.



Before Reading this Guide

Before reading this guide, the user should be familiar with the basic Version 5 concepts such as document windows, standard and view toolbars. Therefore it is recommended that you read the *Infrastructure User's Guide* that describes generic capabilities

common to all Version 5 products.



Getting the Most out of this Guide

To get the most of this guide, it is suggested that you start reading the step-by-step [Getting Started](#) tutorial. Once you have finished, you should move on to the [User Tasks](#) section, then to [Customizing](#) section, which explains how to set up the options and finally to the [Methodology](#) section.



Accessing sample documents

To perform the scenarios, you will be using sample documents contained in the [online/seeug_C2/samples](#). For documents which exist in the SmarTeam database. For more information about sample documents, see [Accessing Sample Documents](#) in the Infrastructure User's Guide.



Conventions Used in this Guide

To learn more about the conventions used in this guide, see the [Conventions](#) section.

Conventions

Certain conventions are used in CATIA, ENOVIA and DELMIA documentation to help you recognize and understand important concepts and specifications. This page describes:

- [Graphics Conventions](#)
- [Text Conventions](#)
- [Mouse Usage](#)
- [Navigation compass](#)

Graphic Conventions

The three categories of graphic conventions used are as follows:

- [Graphic conventions used to structure the tasks](#)
- [Graphic conventions used to indicate the configuration required](#)
- [Graphic conventions used in the table of contents](#)

Graphic Conventions Used to Structure Tasks

Graphic conventions used to structure the tasks are as follows:

This icon

Identifies



estimated time to accomplish a task



a target of a task



the prerequisites



the start of the scenario



a tip



a warning



information



basic concepts



methodology



reference information



information regarding settings, customization, etc.



the end of a task



functionalities that are new or enhanced with this release



allows you to switch back to the full-window viewing mode

Graphic Conventions Used to Indicate Required Configuration

Graphic conventions used to indicate the configuration required are as follows:

This icon

Indicates functions that are



specific to the P1 configuration



specific to the P2 configuration



specific to the P3 configuration

Graphic Conventions Used in the Table of Contents

Graphic conventions used in the table of contents are as follows:

This icon

Gives access to



Site Map



Split View Mode



What's New?



Overview



Getting Started



Basic Tasks



User Tasks or Advanced Tasks



Interoperability



Workbench Description
Customizing
Administration Tasks
Reference
Methodology
Frequently Asked Questions
Glossary
Index

Text Conventions

The following text conventions are used:

- The titles of CATIA, ENOVIA and DELMIA documents *appear in this manner* throughout the text.
- **File > New** identifies the commands to be used.
- Enhancements are identified by a blue-colored background on the text.

Mouse Usage

The mouse usage differs depending on the type of action you need to perform.

**Use this
mouse button Whenever you read**



Select (menus, commands, geometry in graphics area, etc.)

Click (icons, dialog box buttons, tabs, location in the document window)

Double-click

Shift-click

Ctrl-click

Check (check boxes)

Drag

Drag and drop (icons onto objects, objects onto objects)



Drag

Move



Right-click (to select contextual menu)

Navigation Compass



The navigation compass is located in the guide banner next to the guide name. It lets you navigate through the information in the guide.

Use this button To go



Back to the last page visited



Forward through links previously visited



Up to the parent level



Down to the child level



To the previous page at the same level



To the next page at the same level

What's New?

Enhancements

The following enhancements have been added in this release:

- **Reconcile Assembly Structure with a contextual part:**

The application reconciles single root assemblies. If you need to reconcile an assembly containing a contextual part, outside its context, this leads to extending the scope of reconciliation analysis out of the current assembly. The context is kept out of the reconciliation scope and the only rule available for the contextual part is Reload. A contextual part can be updated (Overwrite rule available) only if it is loaded inside its contextual product.

- **Encrypted Passwords for Reconciliator Batches:**

The new `–spwd` switch in the `CATPDMReconcileSTBatch` batch file allows the definition of a Secured password for SmarTeam connection. To be able to use this keyword an implementation of `CATIUExitCrypt` must be implemented and declared through the late type `CATUExitCrypt`.

- **Query to Retrieve Most Recently Available Object from the Database:**

A new interactive query named “Easy Query” is provided to retrieve the most recently available object from the database satisfying the query criterion.

Getting Started

Before getting into the detailed instructions for using SmarTeam - CATIA Supply Chain Engineering Exchange, the following tutorial aims at giving you a feel as to what you can do with the product. It provides a step-by-step exercise based on a realistic design scenario showing you how to use key reconciliator functionalities for reconciling different documents.

The reconciliation process starts with the loading of the source in CATIA V5, then enables you to identify documents which are common to the source and the target SmarTeam database, then compares them. Finally, as a decision support tool, it enables you to manage the trade off between the source and target. This is done while maintaining links consistency and data integrity regardless of the source.

The scenario assumes that a Skateboard. CATProduct document including six CATProduct and CATPart documents is stored in the SmarTeam vault. The skateboard document was sent to a supplier who in turn, made different modifications to it. The tasks to be performed show you how to review and reconcile the updated data sent back by the supplier, with the data stored in SmarTeam.


Before you Begin

Before going thru the different tasks of this tutorial, you need to perform a few preliminary operations for preparing the data we need.

- Saving the document in SmarTeam
First, you need to place the [Skateboard.CATProduct](#) document in SmarTeam.
 - Use **SmarTeam > Save** to save the skateboard. CATProduct document into SmarTeam, in the Project of your choice. Before validating the save operation, select the **Add to Desktop** and **Link to Projects** options.
 - In your CATIA session, apply **SmarTeam > Life Cycle > Check In** to the Skateboard product in CATIA.
 - Close all SmarTeam windows which have been opened.

Now that the skateboard product is no longer in CATIA. For reference information about save and check in operations, see the *SmarTeam - CATIA Integration User's Guide*.


Skateboard stored in SmarTeam

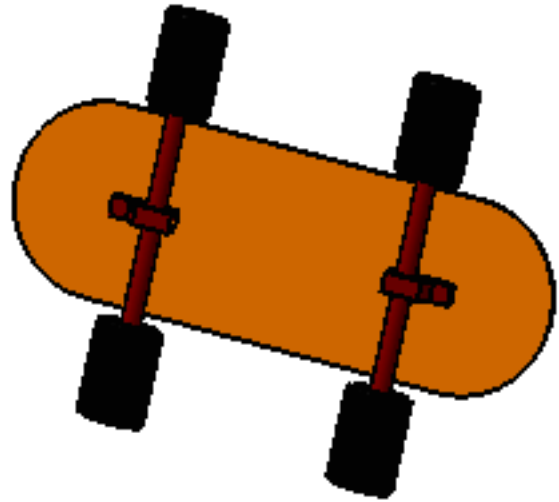

- Opening the document modified by the customer in CATIA
Just click [Skateboard.CATProduct](#) to open the data which you will reconcile with the data stored in SmarTeam.

Skateboard modified by the supplier

Looking at the skateboard supplied, you can notice that the board has been elongated, the wheels have been reduced and that a brake has been added.

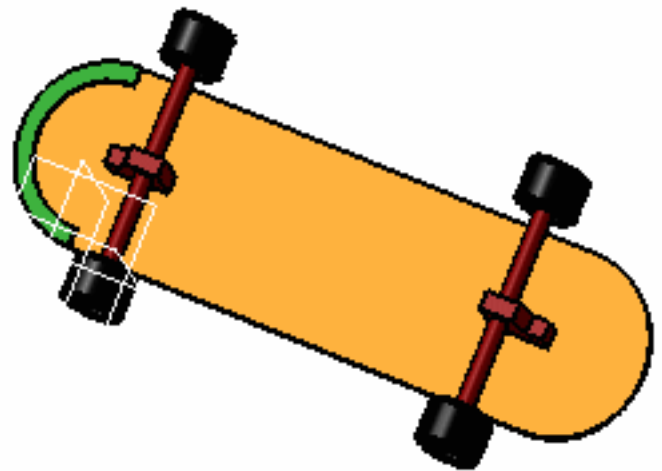

Scenario

The main tasks covered in this section are:

Displaying the Reconcile Window
Identifying the Targeted SmarTeam Documents
Defining Reconciliation Rules
Applying Reconciliation Rules
Saving and Checking In all the Documents in SmarTeam



All together, the tasks should take about 15 minutes to complete.

Displaying the Reconcile Window




The first step of the reconciliation transaction consist in loading from the file system the source documents which need to be reconciled, and then in launching the interactive reconciliation dialog box. The load operation has already been done as explained in [Before You Begin](#). This task now shows you how to access the **Reconcile Window**.



1. Select **SmarTeam > Collaboration > Launch Reconciliation**.




As an alternative, click **Launch Reconciliation**  from the **Reconcile** toolbar

If the toolbar is not available, select **View > Toolbars > Reconcile** and select **Reconcile** in the menu bar. The **Reconcile Window** that appears, contains all the commands for reconciling documents. In the **CATIA View** tab, a tree displays the files making up the selected product. The  symbol indicates that reconciliation rules are not set for the documents to reconcile.

2. In the **CATIA View** tab, select the root document -Skateboard (skateboard) - from the **Objects to reconcile** tree.

For reference information about the **Reconcile Window**, click [Interface Description](#).

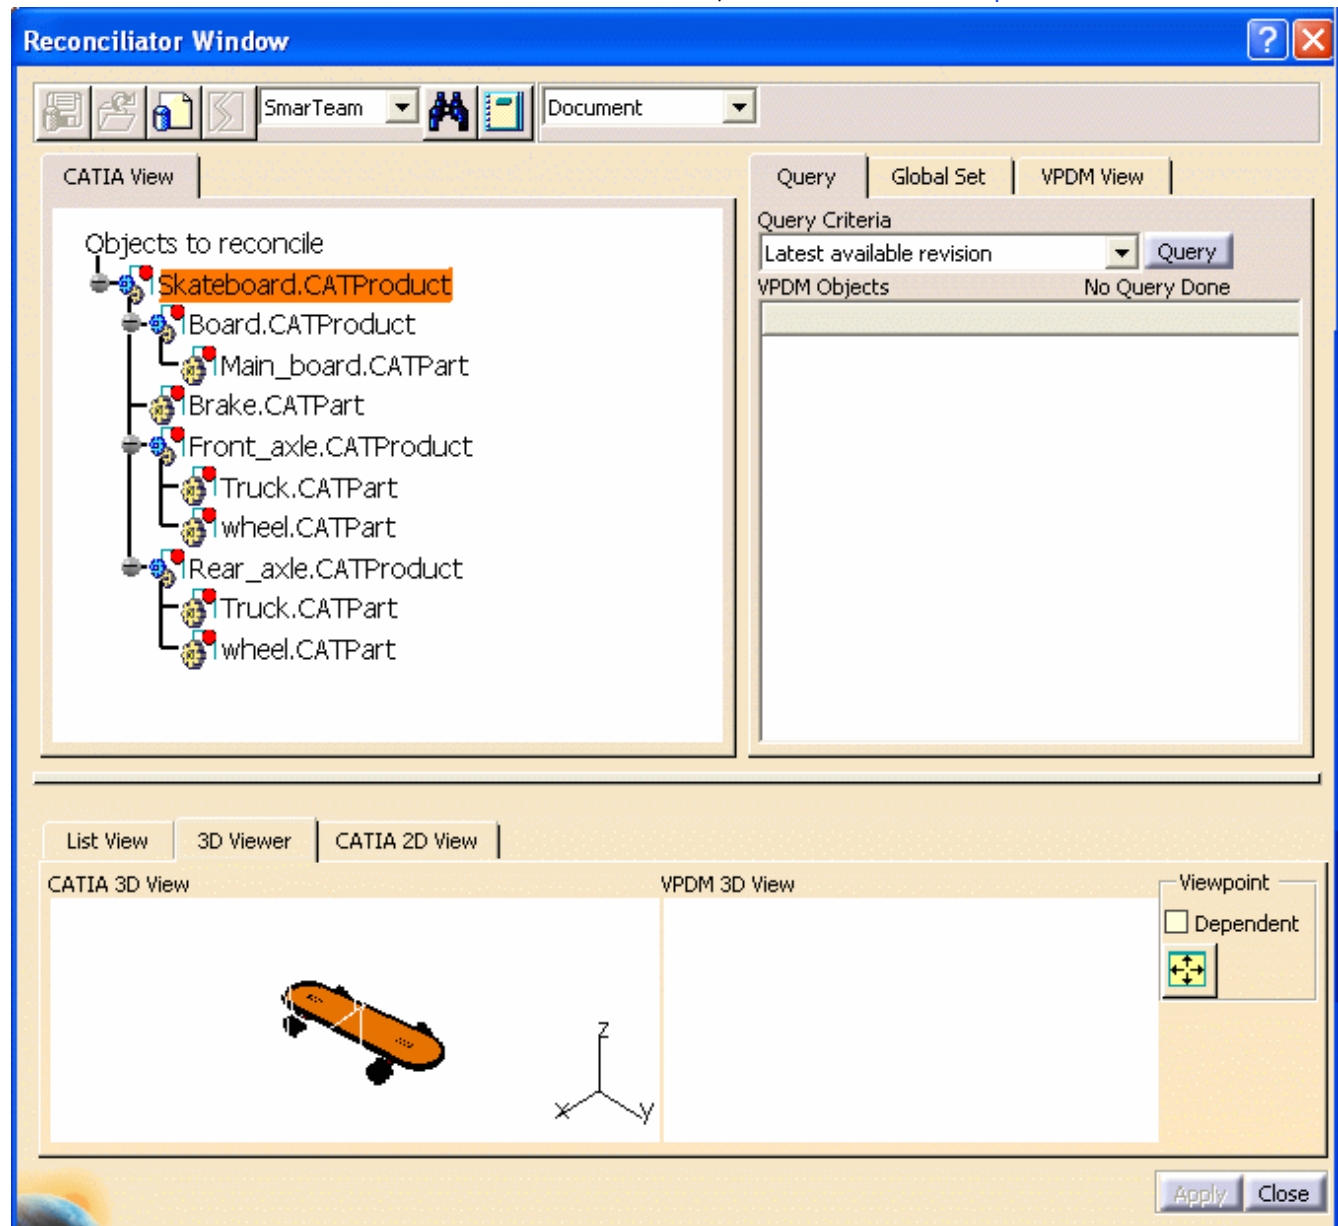

You are now ready to start reconciling documents. Let's first [identify the Targeted SmarTeam Documents](#).




Identifying the Targeted SmarTeam Documents




The second step of the reconciliation transaction consists in checking if the documents to be reconciled already exists in SmarTeam. In this task, you identify from the source documents loaded in CATIA the corresponding documents stored in the SmarTeam database.



1. Select **Skateboard** as the product to be reconciled.
2. Click the **Global Set** tab.
3. Click **Global query** from the list of options.
Global query performs a query for all documents in only one operation.

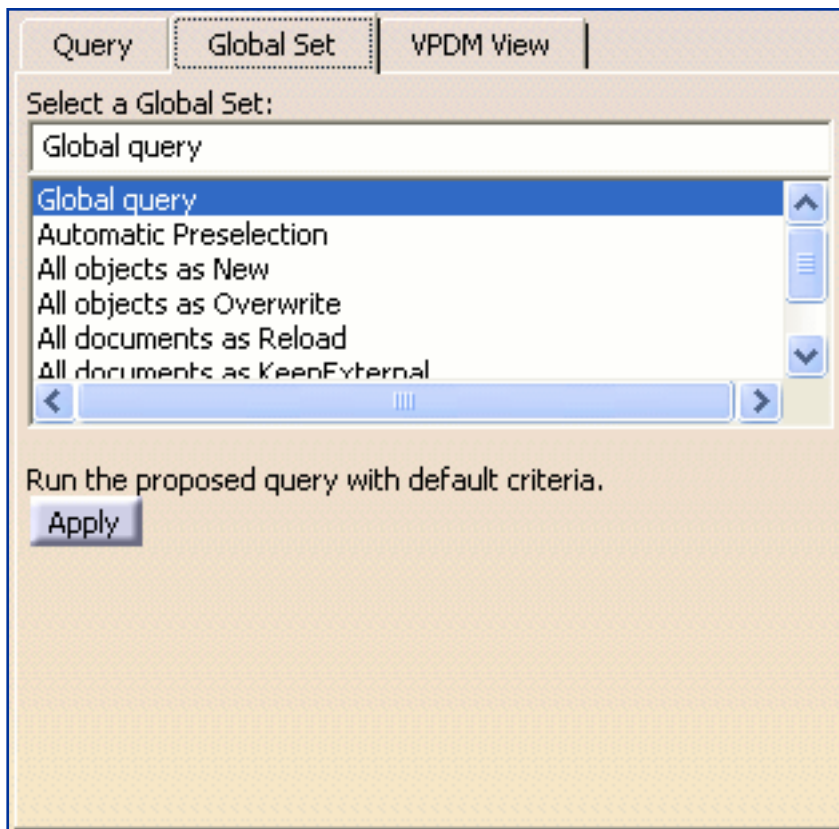

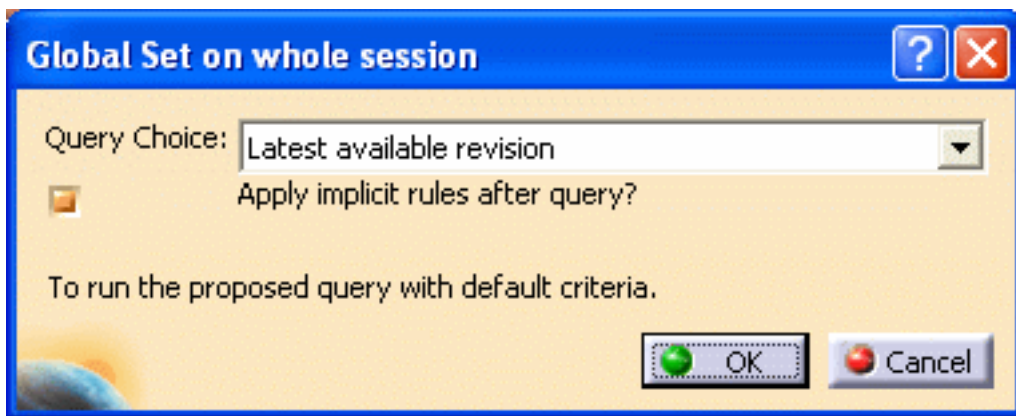


4. Click **Apply** to confirm the operation.
The **Global Set** dialog box is displayed.



5. Click **OK** to confirm your decision.

The documents making up the assembly in your CATIA session have been mapped, except for the **Brake** part.


The  symbol indicates that mappings have been done between the CATIA and the SmarTeam objects, but reconciliation rules are not set yet. As a new part created by the supplier, **Brake** part is not present in the SmarTeam vault. It therefore keeps the  symbol.

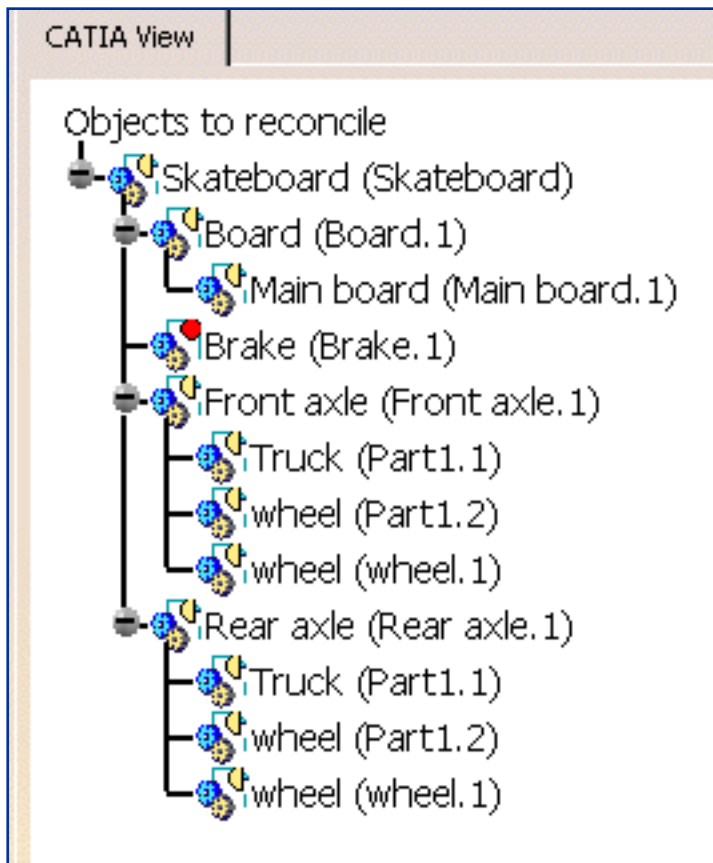

In this scenario, you have identified all targeted documents automatically. However, using **Global Query** is not the only way of **identifying** documents. A manual identification per document is possible. For reference information about all query types, see [Identifying SmarTeam Documents](#).




Defining Reconciliation Rules


 Now, you need to define and apply a reconciliation rule for each document (mapped or not) in the tree. A Reconciliation Rule is a set of information required to reconcile the documents loaded in the CATIA session with the ones stored in SmarTeam vault. This operation is necessary to integrate the document loaded in CATIA into SmarTeam.

After noticing in the 3D Viewer of the **Reconcile window** the modifications made by the supplier and comparing it with the PDM 3D view, you decide to :


- Overwrite the Main board part in order to keep the modifications
- Set as new the Brake part because you haven't it in your database
- Reload the wheels in order to keep your previous version (those in SmarTeam)

For more information about the 3D Viewer, see [Using the Viewers](#).


-  1. Because you set as overwrite the main board, you must also choose to overwrite the Skateboard and the **Board** products. Right-click these documents and select **Overwrite**.

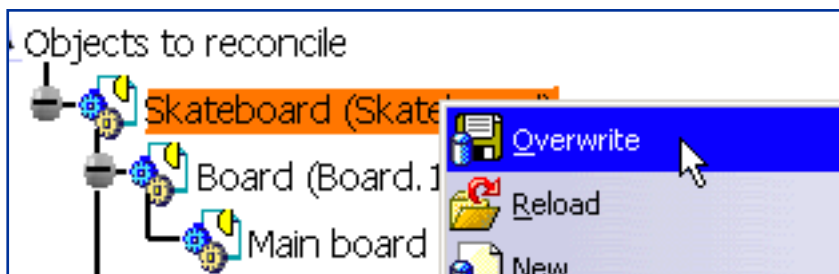



As an alternative, just select **Skateboard** and click . The result is immediate. Once done, new icons indicate the rule set for these documents.

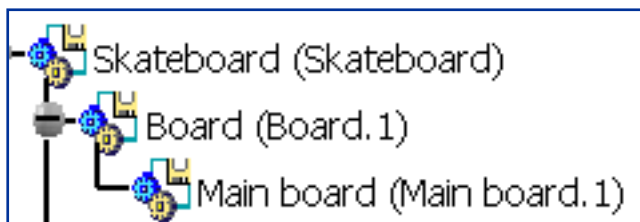


2. Set **Brake** part as a new part: right-click on it and select **New**.

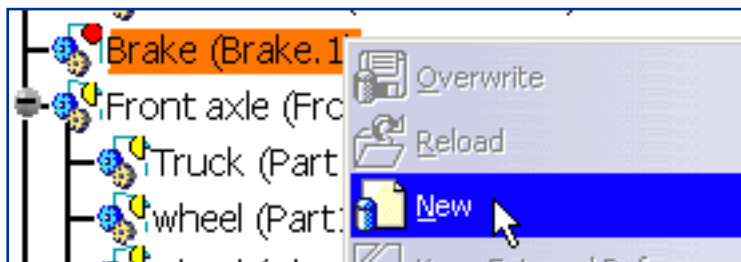


As an alternative, just select **Brake** and click . Once done, a new icon indicates the rule set for this document.




- Concerning the other documents, you decide to reload them because they have not been modified or you do not accept the modifications made. In order to perform this type of treatment in one single operation, click on **Global Set** and choose **All documents as Reload** from the list.

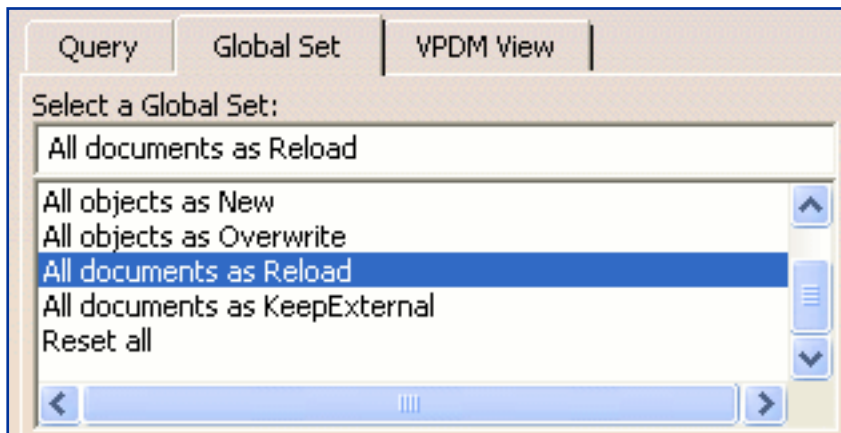

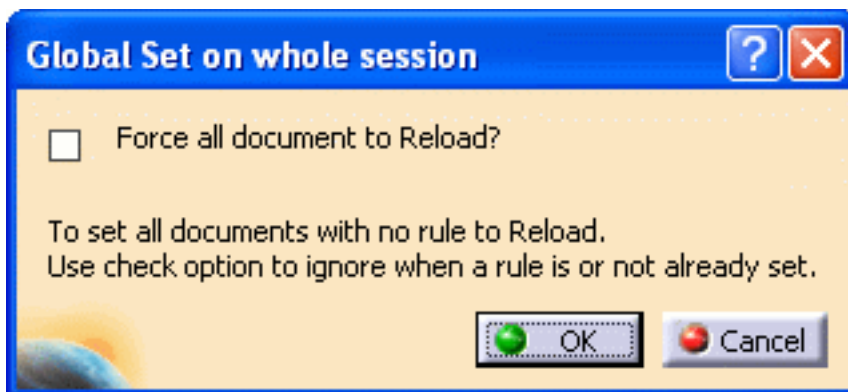


- Click **Apply** to confirm the operation.
The **Global Set** dialog box is displayed. Ensure that **Force all documents to Reload** is not selected.

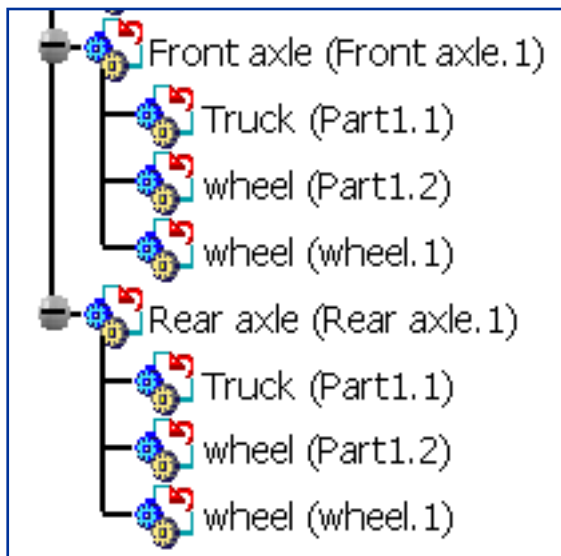

- Click **OK** to confirm your choice and close the **Global Set** dialog box.
When done, new icons indicate the rule set for these documents.



In this task, you have defined three reconciliation rules , , , to meet your needs. For reference information about all reconciliation rules, see [Defining Reconciliation Rules](#). Now just move to the next task to launch the reconciliation.



Applying Reconciliation Rules





In the previous task you have defined a reconciliation rule for each document. You now just need to launch the reconciliation process.



1. Click **Apply** to launch the reconciliation operation.
2. Validate the check out window that appears.
This window lets you check out the main board part, the Skateboard and the Board products.
3. Once the reconciliation is complete, the message "Reconciliation successfully executed" is issued by the application. Click **OK** to close this information window.



4. Close the **Reconcile Window**.
In your CATIA session, you can observe the new structure and geometry of the assembly. The Brake part has been added, the board elongated. The wheels remain unchanged.

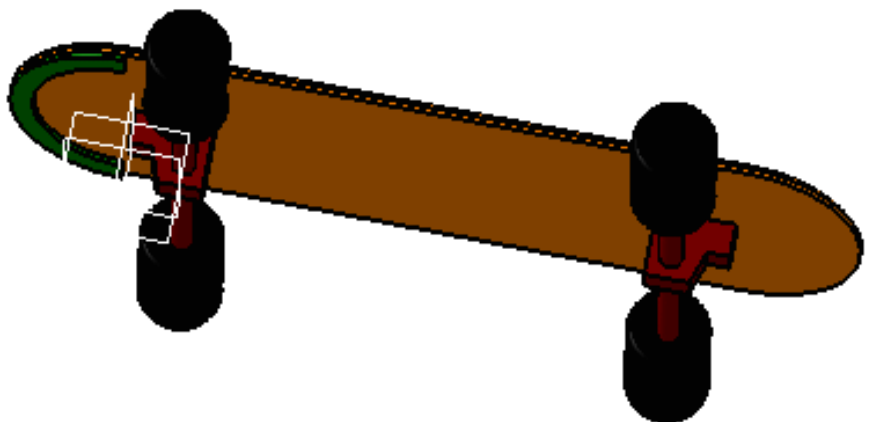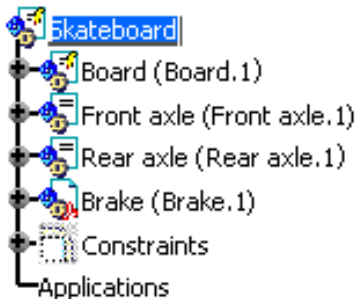

The reconciliation process is over. Let's now complete the scenario by [saving and checking in](#) this assembly in SmarTeam.



Saving and Checking In All the Documents in SmarTeam



Once the data is reconciled, the last step of the scenario consists of saving and checking in the modified skateboard in SmarTeam.



1. Select the skateboard product in CATIA.
2. Select **SmarTeam > Save**.
If the **Batch mode save** option is on, no profile card appears. Otherwise, complete the Brake profile card as you want.
3. Select the skateboard product.
4. Select **SmarTeam > Life Cycle > Check In**.
5. Click **OK** to confirm the operation..
The skateboard is stored in SmarTeam and closed in CATIA.

You have now finished the Getting Started scenario. If you wish to take a closer look at the product, you should move on to the [User Tasks](#) section.



User Tasks

The tasks documented in this section explain the different possible ways of reconciling documents.

[Identifying SmarTeam Documents](#)

[Defining Reconciliation Rules](#)

[Using Reconciliation Tools](#)

[Automating Reconciliations Using the Automatic Preselection Command](#)

[Automating Reconciliations Using the CATStiReconcileBatch Batch Tool](#)


[Generating a Reconciliation Report](#)

Identifying SmarTeam Documents

The first step of the reconciliation transaction consists in opening in CATIA the source documents received by an OEM or supplier and in launching the Reconcilator. The second step consists in identifying the corresponding target documents stored in SmarTeam thru query criteria. Two types of customizable queries are available for end users:

- **Query by Latest Revision**
- **Interactive-Latest Available Revision.**

The identification process is also called "mapping". The list of available queries are displayed inside the **Query Criteria** list.

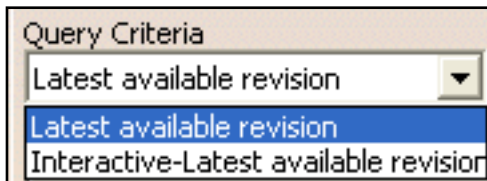

Note: You need to select an object from the CATIA view tab in order to display the list of available query criteria.

This section discusses the different methods for performing queries.


[Performing a Query by Latest Available Revision](#)
[Performing an Interactive Query](#)
[Performing an Easy Query](#)
[Identifying the Documents Globally](#)
[Undoing Document Mapping](#)

Using SmarTeam databases


If you are using SmarTeam databases other than Version 5 Release 16, administrators must have first customized your environment prior to performing queries. For more information, see [Customizing Queries](#) and [Customizing Query Results](#).


Note: SmarTeam does not support a multiple copy file operation on documents having the same Application File Name. Such operation makes the work inconsistent.


Performing a Query by Latest Available Revision

 This task shows you how you to perform a non-interactive query. Non-interactive queries are done using the **Latest available revision** option. This option filters out the possible different versions of a document located in SmarTeam to display the latest revisions only.

Note that you can customize queries using the **Integration Tool Setup** utility. For more information, see [Customizing Queries](#) and [Customizing Query Results](#).


 In CATIA, open a product containing at least one sub-product to reconcile and [display the Reconcile Window](#).

-  1. In the CATIA View, select the document you wish to map onto a SmarTeam object.
2. From the **Reconcile Window**, in the **Query** tab from the drop-down list for query criteria, set **Latest Available Revision** if not already done.

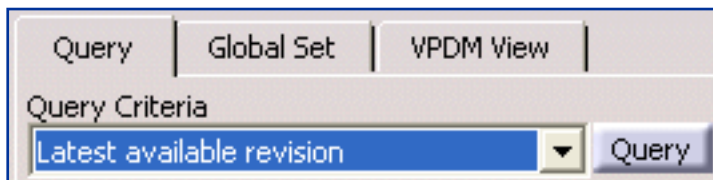

3. Click **Query**.
- If the document exists in SmarTeam, the application displays its latest revision in the **Objects** area. In addition to this type of information, this area may also display other helpful information. The number of information displayed depends on the way the query operation has been customized. For more information, see [Customizing Query Results](#).

VPDM Objects			
Description	Part Number	ID	Application Reference File
Skateboard	Skateboard	CATPRD-0054	Skateboard.CATProduct

In **CATIA View**, the  symbol indicates that mapping has been done between the CATIA and the SmarTeam object, but a reconciliation rule is not set yet.


If no document is found, the application displays **No Object Found**.


Query Contextual Command


Searching for SmarTeam objects can be done using the **Query** contextual command. The query type that will be executed - **Interactive-Latest Available Revision** or **Latest Available Revision** - is the query selected in the **Query Criteria** field.



Performing an Interactive Query


 This task shows you how you to perform an interactive query. Interactive queries are search for objects in SmarTeam using the **latest available revisions** criterion and additional criteria you can enter in a **Query** dialog box. These additional criteria can be customized using the **Integration Tools Setup** utility. For more information, see [Customizing Queries](#) and [Customizing Query Results](#).

 In CATIA, open a product containing several sub-products to reconcile and [display the Reconcile Window](#).

 1. From the **Reconcile Window**, in the **Query** tab set **Interactive-Latest available revision** from the drop down list.

2. Click **Query**.

The **Interactive-Latest available revision** dialog box is displayed. By default, the **Part Number** field is pre-set by SmarTeam.

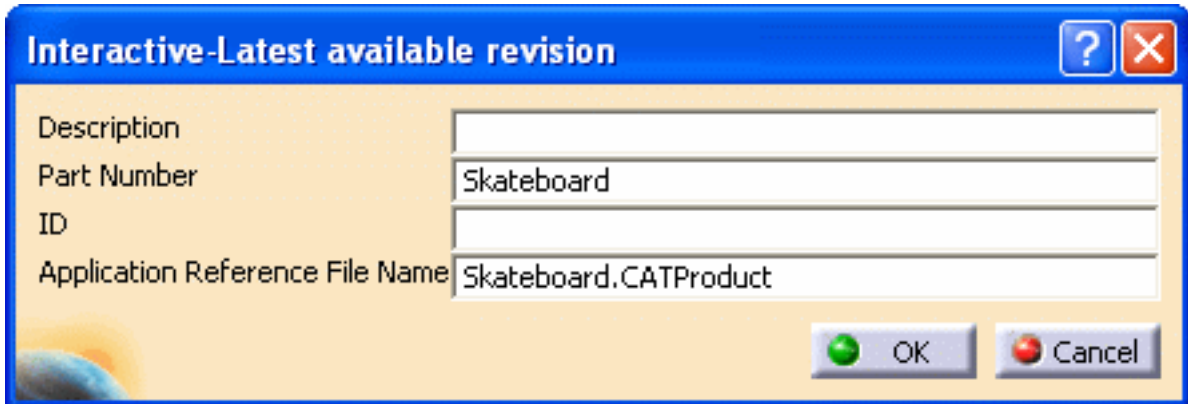

The dialog box titled "Interactive-Latest available revision" has a blue header bar with a question mark icon and a close button. It contains four input fields: "Description" (empty), "Part Number" (containing "Skateboard"), "ID" (empty), and "Application Reference File Name" (containing "Skateboard.CATProduct"). At the bottom right are "OK" and "Cancel" buttons.


3. Enter a document ID, a description or a reference file name in the corresponding fields or fill in all fields.

4. Click **OK** to run the query.

If the application has detected a SmarTeam document which the document can be mapped to, the application displays its latest revision in the **Objects** area.

In addition to this type of information, this area may also display other helpful information. The number of information displayed depends on the way the query operation has been customized. For more information, see [Customizing Query Results](#).

VPDM Objects		1 VPDM Object Found	
Description	Application Reference File Name	Revision	State
Skateboard	Skateboard.CATProduct	a.0	2

In **CATIA View**, the  symbol indicates that mapping has been done between the CATIA and the SmarTeam object, but a reconciliation rule is

not set yet.

If no document is found, the application displays **No Object Found**.

Optimizing Interactive Queries

From V5R18 onwards, the application memorizes the values you entered in the **Query** dialog box for searching for a given document. In concrete terms, each time you will relaunch an interactive query for that document, you will do not need to fill in the fields. The application will display them as default values.

Query Contextual Command

Searching for SmarTeam objects can be done using the **Query** contextual command. The query type that will be executed - **Interactive-Latest Available Revision** or **Latest Available Revision** - is the query selected in the **Query Criteria** field.



Performing an Easy Query



This task shows you how to perform an easy query in the Mapping Groups Tree. Each Mapping Group Type can contain other Mapping Group Types.

The easy query allows you retrieve the most recent revision of an object from the database that satisfies the query criterion.

For example, if the following documents exist in the SmarTeam database:

#	Document ID	Revision	Part Number	Attribute_1
1	DOC-01	-.00	PN0123	TOTO
2	DOC-01	-.01	PN0123	TOTO
3	DOC-01	-	PN0123	TOTO
4	DOC-01	a.00	PN0123	TOTO
5	DOC-01	a	PN0123	TOTO
6	DOC-01	b.00	PN0123	RIRI
7	DOC-01	b.01	PN0123	RIRI
8	DOC-02	-.00	PN0456	TATA
9	DOC-02	-.01	PN0456	TATA

Case 1

If the criteria of the query are:

Part Number = "PN0123" AND Attribute_1 = "TOTO", then the query result will contain only document #5:

#	Document ID	Revision	Part Number	Attribute_1
5	DOC-01	a	PN0123	TOTO

Note that previously, this type of query would not produce any result, as the latest available revision for this query is document #7, but it does not match the attribute criteria "TOTO".

Case 2

If the criterion of the query is:

Attribute_1 = "T*", then the query result will contain document #5 and document #9:


#	Document ID	Revision	Part Number	Attribute_1
5	DOC-01	a	PN0123	TOTO
9	DOC-02	-.01	PN0456	TATA

Note that previously, this type of query would result in document #9 only.

Mapping Groups

Multiple mapping groups may appear under one Mapping Group Type, but each mapping group is dedicated to a specific Reconciliator query/queries.

For example, under the Reconciliator Query Mapping Group Type, there are two mapping groups, Generic Query and Easy Query as shown below:

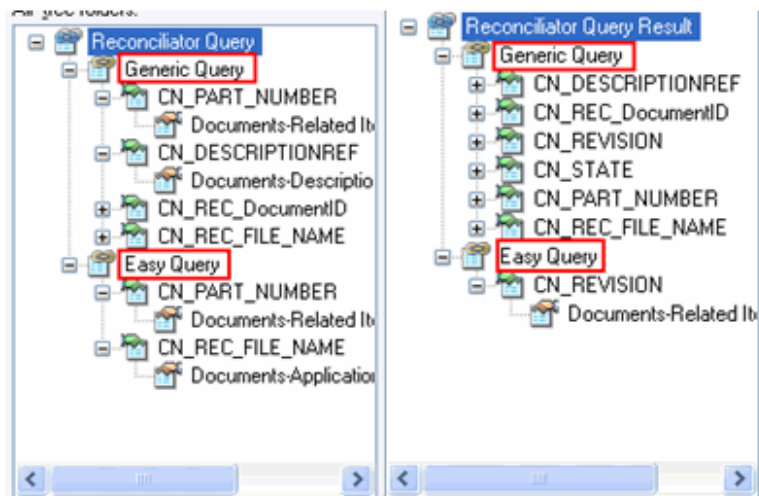

The Easy Query mapping group is used by the Reconciliator Query.


The Generic Query mapping group is used by queries based on the Latest Available Revision and Interactive Latest Available Revision queries.

Similar changes have been done in the Reconciliator Query Result mapping group type.



Interactive Easy Query


The Interactive Easy Query can be accessed in the Reconciliator Window from the Query Criteria drop down list.

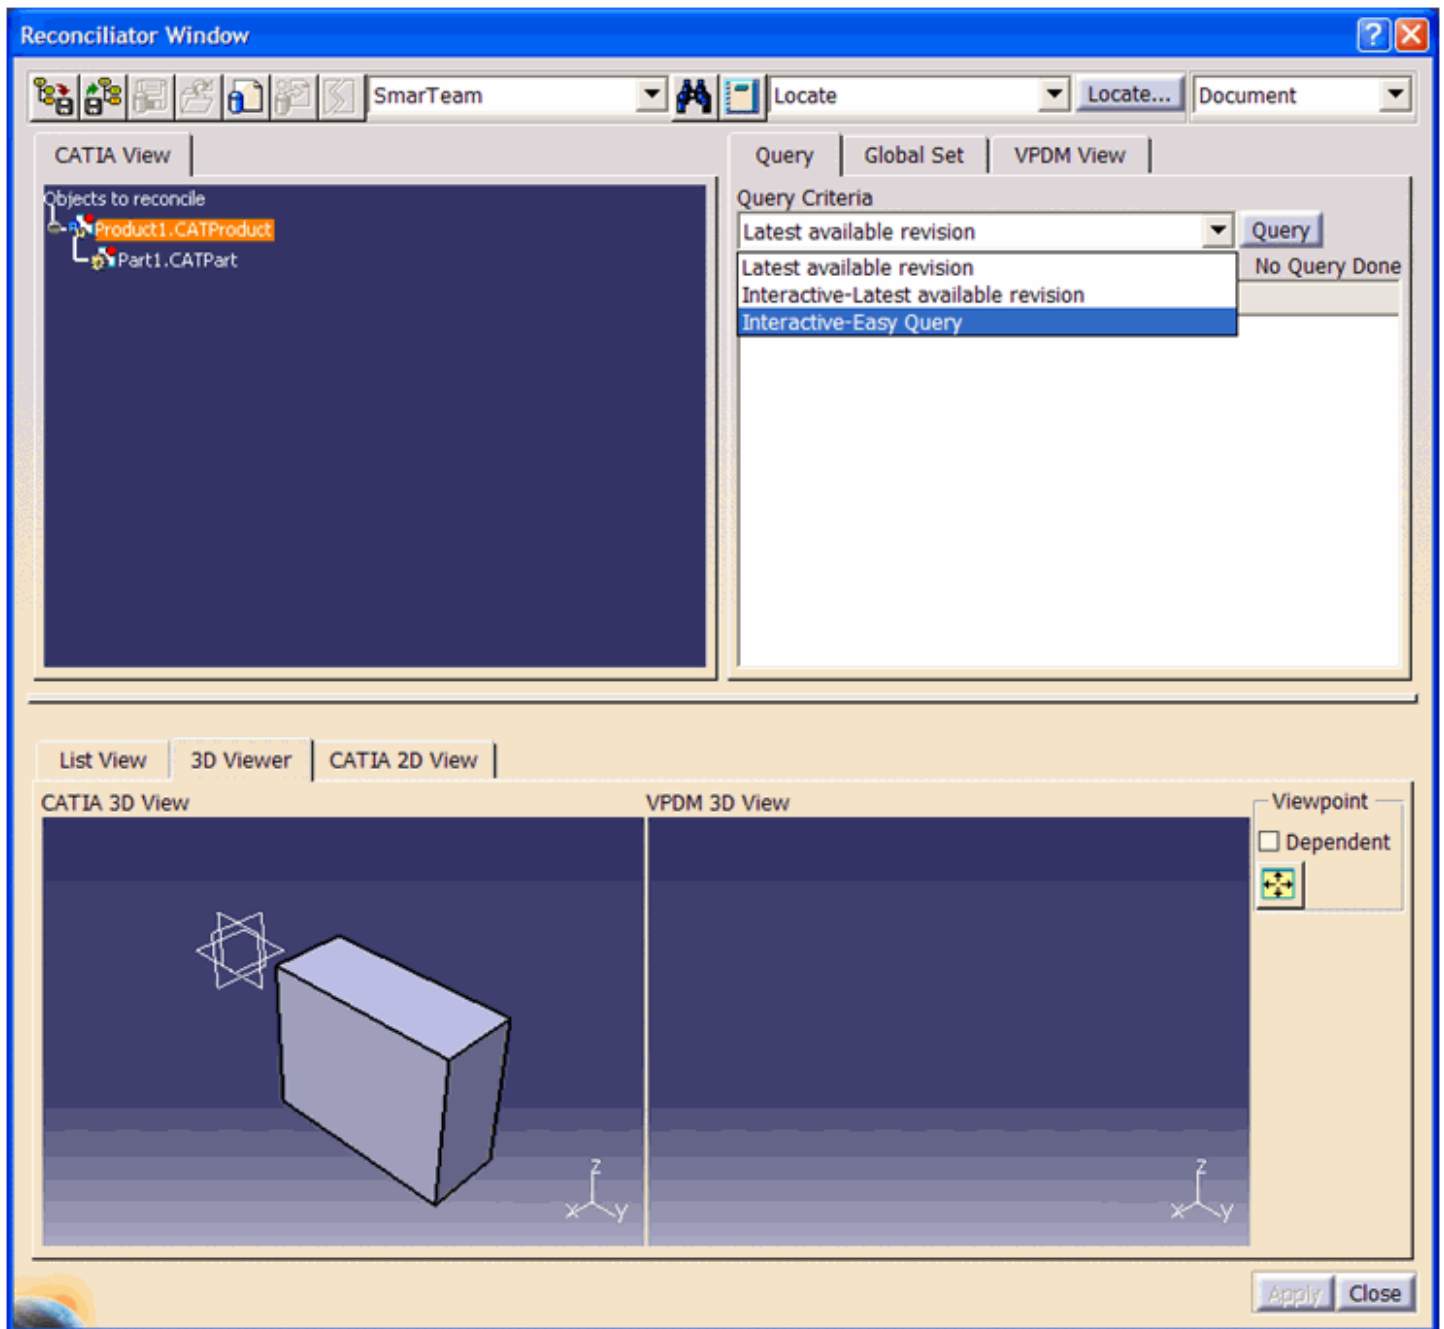

The Interactive Easy Query is available by default on CXR20 and above provided that the proper SmarTeam Integration Tools Setup operations are performed. See Prerequisites for details.





Identifying the Documents Globally


 In case you need to reconcile a large number of documents sent by your OEM or supplier, you can perform a global query to accelerate the first step of the reconciliation operation which consists of checking if all the objects to reconcile already exist in SmarTeam.

Once the global identification is done, you need to define the rules you wish to apply to the source documents loaded in CATIA with respect to the targeted documents located in SmarTeam. To know how you can perform these operations in a productive way, see [Automating the Valuation of Reconciliation Rules](#).


This task shows you how you to perform a global query using the **Global Query** capability.

 In CATIA, open a product containing several sub-products to reconcile and [display the Reconcile Window](#).

-  **1.** In the **Reconcile Window**, click the **Global Set** tab.
- 2.** Select **Global query** from the list.
- Global Query** performs a query for all documents in only one operation.

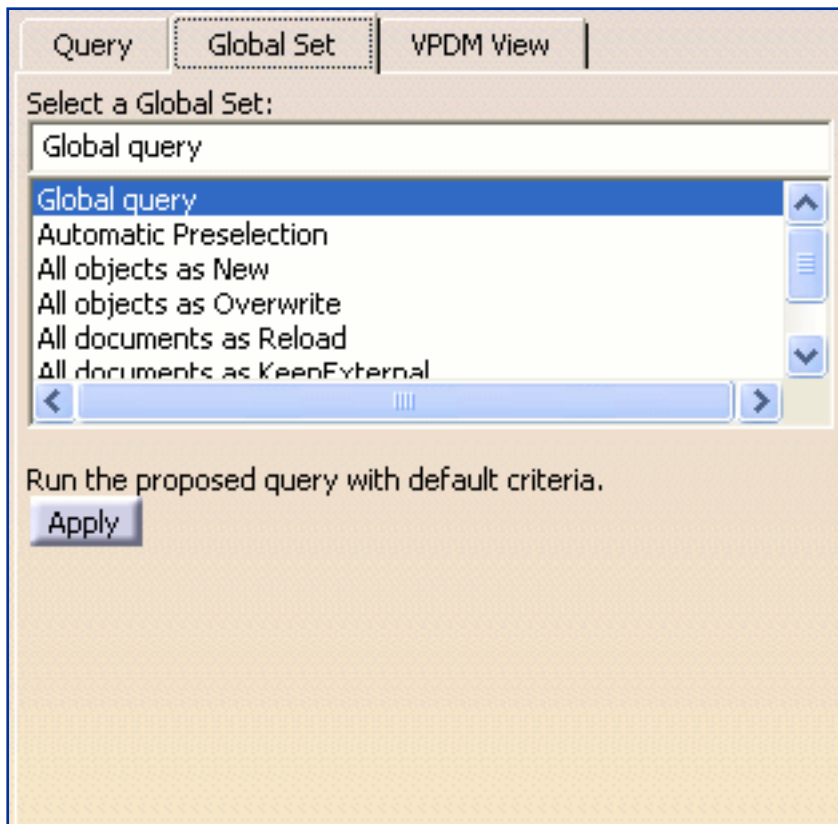



- 3.** Click **Apply**.
- The **Global Set** dialog box is displayed.

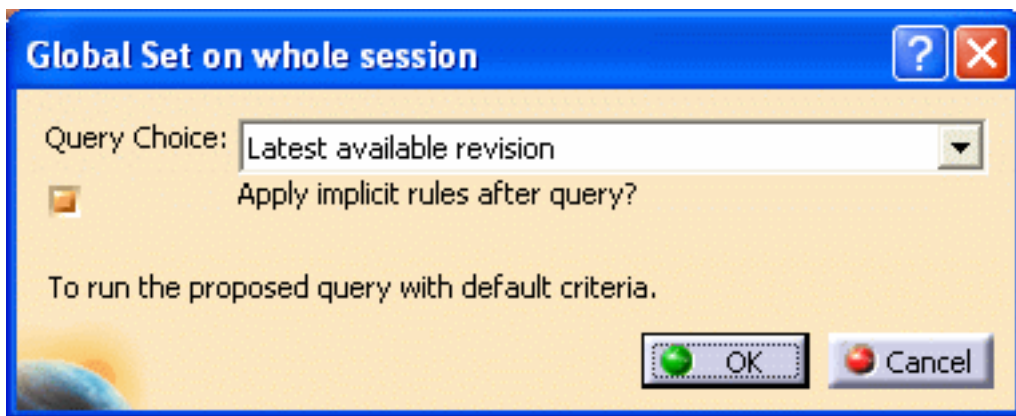


4. Click **OK** to confirm your decision.

A progress bar is displayed. You can use the **Cancel** button to stop the query at any time.

Once the operation has been performed, the documents making up the assembly in your CATIA session are mapped, except for new parts.

The  symbol indicates that mappings have been done between the CATIA and the SmarTeam objects, but reconciliation rules are not set yet. If your assembly contains new parts, because these are not present in the SmarTeam vault the  symbol remains on their icons.

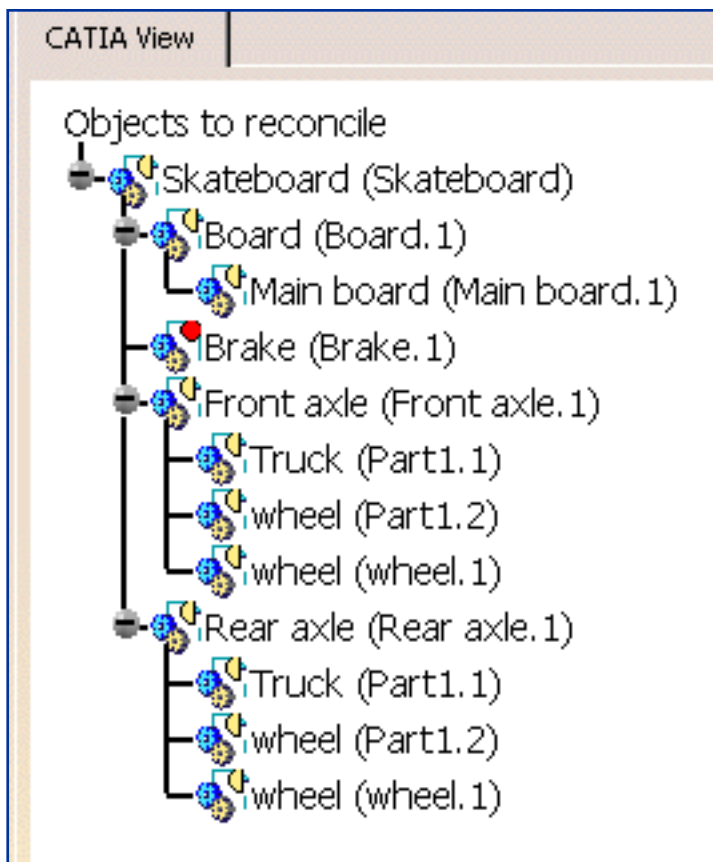

Restricting the Global Set Options to Some Objects


You can now apply the following commands to sub-trees selected in the **CATIA View** area: you just need to select the node of the branches on interest prior to using the command:


- **Global query**
- **All objects as New**
- **All objects as Overwrite**
- **All documents as Reload**

Note that you cannot apply the capability to multi-selected nodes.



Undoing Document Mapping


 This task shows you how you to undo the mapping of documents resulting from query operations. The application lets you undo mapping for one document in particular or for all the documents of the **Objects to reconcile** tree.

 In CATIA, open a product containing several sub-products to reconcile and perform a query as explained in [Identifying SmarTeam Documents](#).


Undoing One Mapping

The **Reset** contextual command lets you reset one object mapping.

1. Select a document which has been mapped to a SmarTeam object.

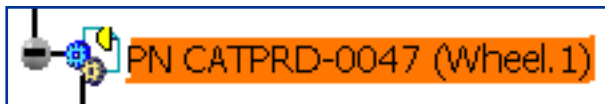

2. Right-click and select **Reset**.
The document is no longer mapped as indicated by the  symbol.

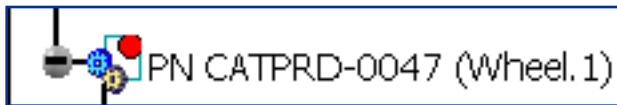

Undoing All Mappings

To undo the mapping of several documents, we recommend you use the **Reset all** command. This undoes several documents mappings but also resets the reconciliation rules which have been defined.

Reset all is available from the **Global Set** tab. For more information, see [Resetting All Rules](#).




Defining Reconciliation Rules

This section discusses the different reconciliation rules you can define once your documents have been mapped onto SmarTeam objects.

[Defining the Reconciliation Rule You Need](#)
[Automating the Valuation of Reconciliation Rules](#)
[Resetting Reconciliation Rules](#)

Defining the Reconciliation Rule You Need


 Once you have mapped the documents to reconcile, you need to define how you want to reconcile them. Defining this consists of setting reconciliation rules. A reconciliation rule is a set of information required to reconcile the documents loaded in the CATIA session with the ones stored in the SmarTeam vault.

Five reconciliation rules can be defined:


- **Overwrite**
- **Reload**
- **New**
- **New From**
- **Keep As External**


This task shows you how to define a reconciliation rule for each document loaded in your CATIA session. It assumes that you have already performed a [query](#).

The steps described must be followed if your session contains a small number of documents. Whenever you will need to reconcile a large number of documents, we recommend you [automate the valuation of reconciliation rules](#).

-  1. From the **Objects to reconcile** tree, select the document which has already been mapped to a SmarTeam object.
2. Right-click and select any of the following rules:
- [New](#)
 - [New From](#)
 - [Overwrite](#)
 - [Reload](#)
 - [Keep as external](#)


New


Right-click and select **New**. As an alternative, you can click . When applying the **New** rule, the reference object is considered as a new object in SmarTeam. Once done, a new icon indicates the rule set for this document.

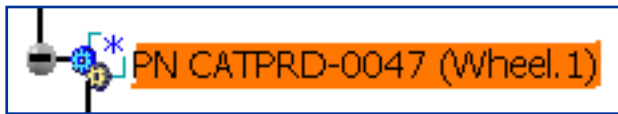


New From



Right-click and select **New From**. As an alternative, you can click . When applying the **New From** rule, the reference object is considered as a new object in SmarTeam. Once done, a new icon indicates the rule set for this document.

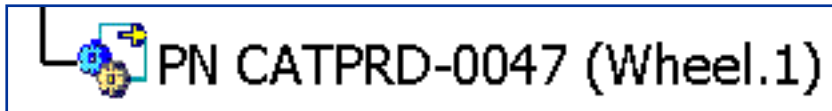


The **New From** rule is used when, for example, you are reconciling a structure exposed document. Because it is not possible to set the


Overwrite rule  to CATProduct documents saved in structure exposed mode, you can use the **New From** rule to keep the history of the different versions of a product. When saved to SmarTeam, a document with the **New From** rule applied results in a new document created along with a link between the new document and the SmarTeam document it is mapped to. **New From** is available only if the following are all true:

- The CATIA document is mapped to a SmarTeam document
- The two documents have the same type (CATProduct, CATPart, CATDrawing ...)
- The two documents don't have the same CATIA Internal Identifier (UUID)


Overwrite




Right-click and select **Overwrite**. As an alternative, you can click . When applying the **Overwrite** rule, the object loaded in the CATIA session overwrites the one stored in SmarTeam. Once done, a new icon indicates the rule set for this document.




Reload

Right-click and select **Reload**. As an alternative, you can click . When applying the **Reload** rule, the SmarTeam object is kept. Once done, a new icon indicates the rule set for this document.



Keep as External


Right-click and select **Keep As External**. As an alternative, you can click . The **Keep As External** rule is available only for documents that are not present. This rule enables you to ignore broken links in the reconciliation process. When done, a new icon indicates the rule set for this document.





For more information, see [Managing Broken Links](#) and [Internal Intellectual Property \(I.P.\) Protection - Integrating Subsets of Data](#).




Automating the Valuation of Reconciliation Rules

 In case you need to reconcile a large number of documents sent by your OEM or supplier, you can automate reconciliation tasks by setting rules which apply to all the objects to reconcile. This task shows you how to do so.

 This task assumes that you have already performed a query operation for mapping documents. For productivity reasons, prior to performing this kind of operation which involves a certain large number of documents, we recommend you perform a global query as explained in [Identifying the Documents Globally](#).

 1. In the **Reconcile Window**, click the **Global Set** tab.
The different options available from this tab let you apply global rules among predefined list of automatic valuation strategy.

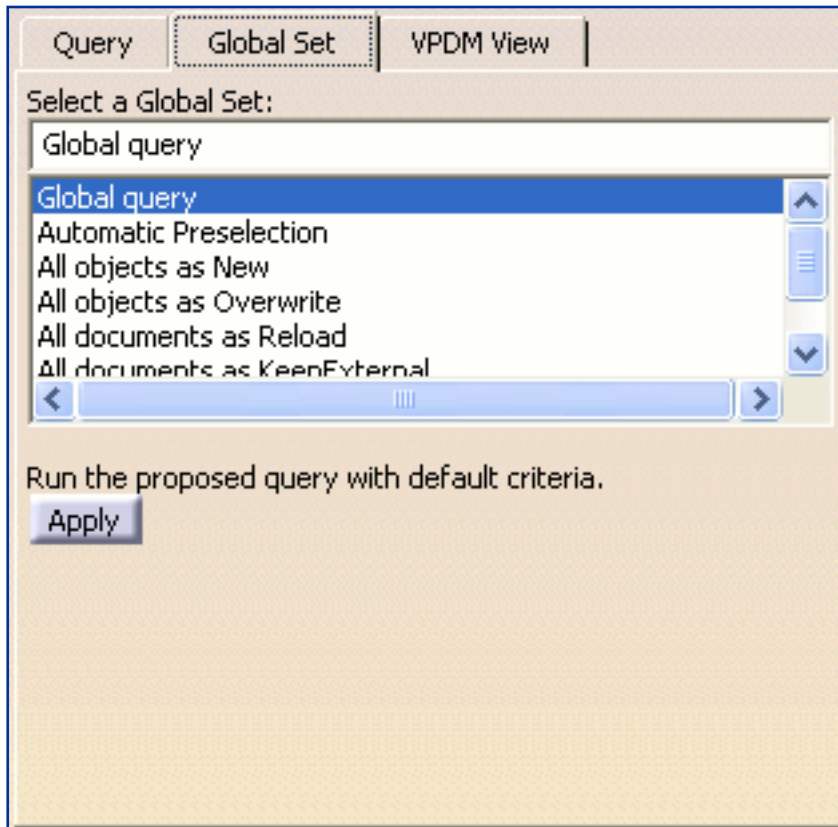


2. Select any of the following rules:

- [All objects as New](#)
- [All objects as Overwrite](#)
- [All documents as Reload](#)
- [All objects as New From](#)

All objects as New


All objects as New sets all objects to **New**.

When you select this option and click the **Apply** button, the dialog box that appears, displays the **Force mapped object to New** option. If you select it, all the objects, even those that are already mapped, will be set to **New**.

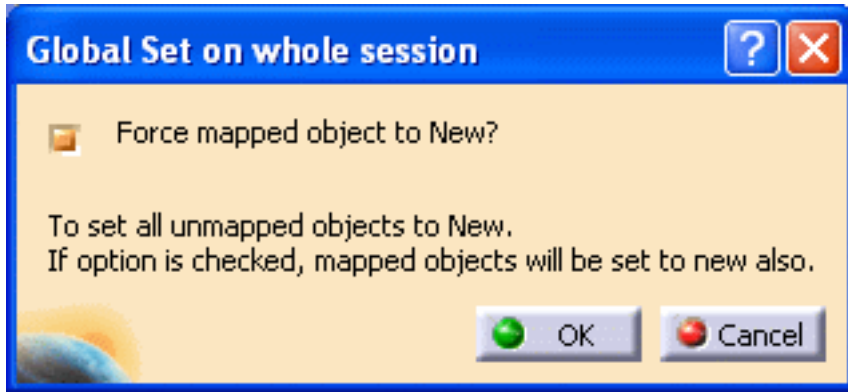

All objects as Overwrite


All objects as Overwrite sets all mapped objects with no rule to **Overwrite**. When you select this option and click the **Apply** button, the dialog box that appears, displays the **Force all to Overwrite** option. If you select it, the rules that were previously applied to these objects will be overwritten.

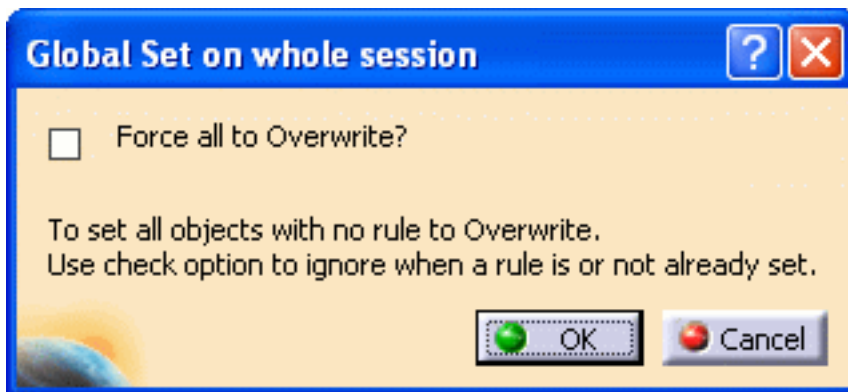

All objects as Reload

All objects as Reload sets all mapped documents to **Reload**.


When you select this option and click the **Apply** button, the dialog box that appears, displays the **Force all documents to Reload** option.

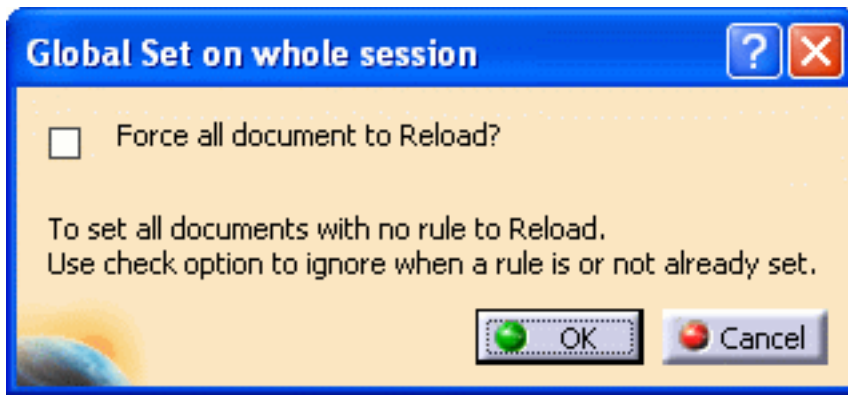


If you select it, all existing rules will be overwritten and replaced with **Reload**.

All objects as New From


All objects as New From sets all objects to **New From** if the New From conditions are satisfied (see [Defining the Reconciliation Rule You Need](#) for more information). When you select this option and click the **Apply** button, the dialog box that appears, displays the **Force mapped object to New** option. If you select it, all the objects, even those that are already mapped, will be set to **New From**.

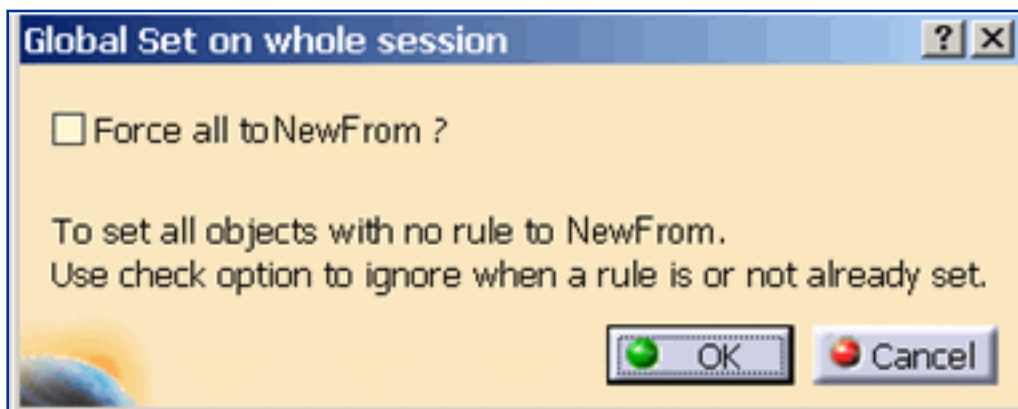

Resetting Reconciliation Rules

 This task shows you how you to reset reconciliation rules. The application lets you reset the rule defined for one document in particular or all the rules you have defined for all the documents of the **Objects to reconcile** tree.

When resetting the rules for all documents, you can choose between resetting only the rules or the rules and the mapping.

 In CATIA, open a product containing several sub-products to reconcile and set three [reconciliation rules](#).




Resetting One Rule


The **Reset** contextual command lets you reset the rule defined for one document.


1. Select a document for which a rule has been defined.

In our example, the **New** rule has been defined.

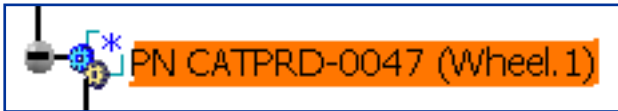

2. Right-click and select **Reset**.

The rule has been reset and the document is no longer mapped as indicated by the  symbol.

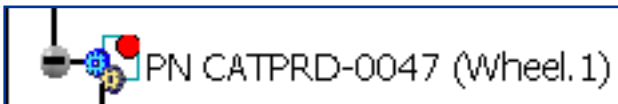


Resetting All Rules

The **Reset all** command lets you choose between:


- resetting all the reconciliation rules which have been defined.
- resetting all the reconciliation rules which have been defined and undoing all documents mappings.


1. Click the **Global set** tab.


In our example, two rules have been defined: one for PN CATPRT-0183 (Crowbar.1) and one for PN CATPRD-0045 (Cutting Mechanism.1).

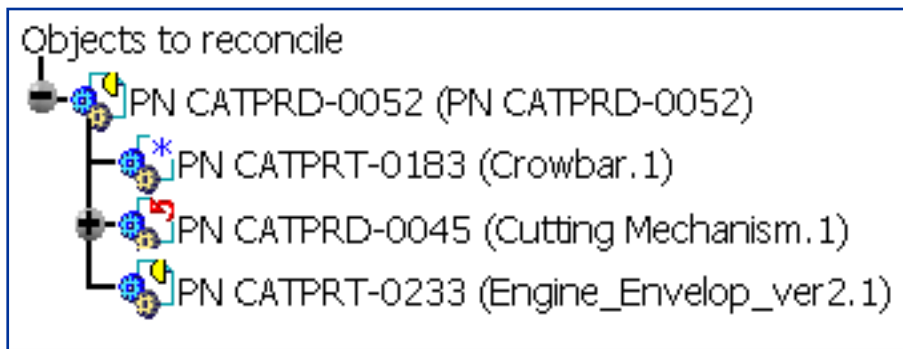


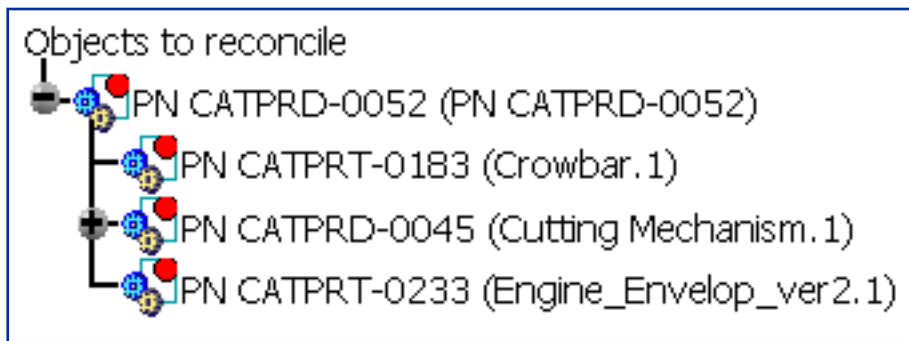
2. Select **Reset all** from the drop-down list.
3. Click **Apply**.
The **Global Set** dialog box is displayed. The **Reset choice** drop-down list provides two reset options:
 - **only rules** (default option): resets reconciliation rules only
 - **rules and mapping**

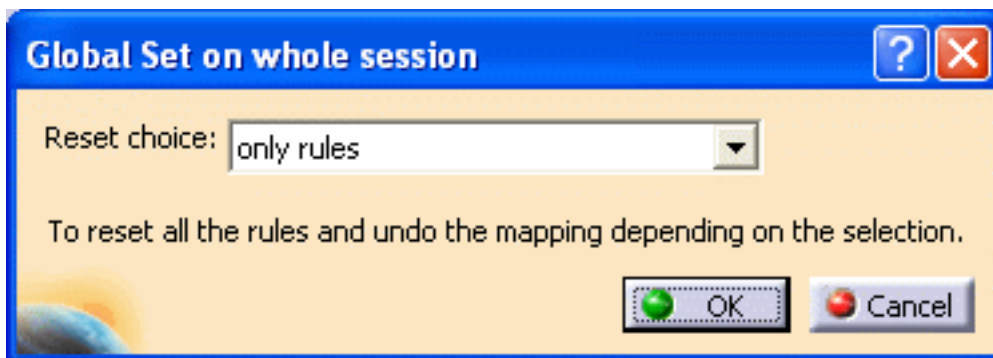

4. Keep **only rules**, and click **OK** to confirm.
Both rules are removed, the mapping is maintained as indicated by the  symbol.

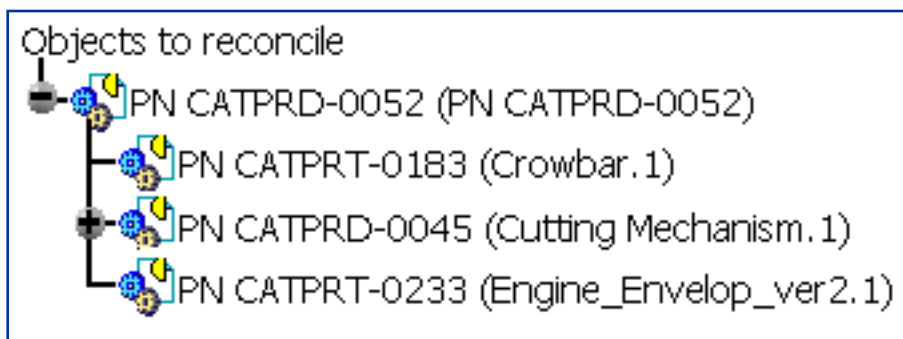

Setting **rules and mapping** would let you obtain this result:
The documents are no longer mapped as indicated by the  symbol and the rules have been reset.



See also [Undoing Document Mapping](#).



Using Reconciliation Tools

The application provides different tools to help you reconcile documents.

[Managing Broken Links](#)

[Using the Locate Tool](#)

[Using the Sort Tool](#)


[Using the Viewers](#)

[Showing Profile Cards](#)

Managing Broken Links

 Sometimes, for different possible reasons, suppliers send incomplete design. In such cases, the **Reconcile Window** displays broken links for the product loaded in your CATIA session.


ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange enables you to integrate incomplete design received from suppliers. Because a specific rule lets you manage broken links, it is then possible for suppliers or manufacturers (OEMs) to choose not to expose all documents. This therefore ensures Intellectual Property protection.

This rule is **Keep as External** . It is available for documents that are part of the design or of the assembly but that are missing while reconciling. Available only for documents that are not present, it enables you to integrate incomplete design received from a supplier.

For an example of when you can use this rule see [Exchanging Modified Documents Only](#) and [Internal Intellectual Property \(I.P.\) Protection - Integrating Subsets of Data](#) in the Methodology section of this guide.





Using the Locate Tool


 This task shows you how to search for objects to reconcile using their attributes values in the **Objects to reconcile** tree and in the List View according to the attribute selected in the Locate dialog box.

The Locate tool enables you to work on specific objects for example objects having a specific type (CATProduct) or a specific naming rule.

You can use this functionality at any step of the reconciliation definition to perform a search.

 In CATIA, open any product to reconcile and [display the Reconcile Window](#).

-  1. Click **Locate**  or right-click an item in either the **Objects to reconcile** tree or in the **List View** and select **Locate**.
The **Locate** dialog box is displayed.

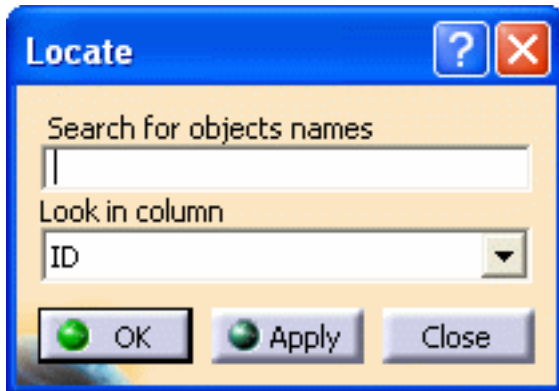


2. The different search criteria available in the **Look in column** scrolling list are:
- ID
 - Rule
 - Type
 - Document
 - Environment

For example, select **ID**.

3. Enter ***Wheel*** in the **Search for objects names** field.

4. Click **Apply**.

The documents containing the "Axle" string are highlighted both in the **CATIA view** and in the **List View**.

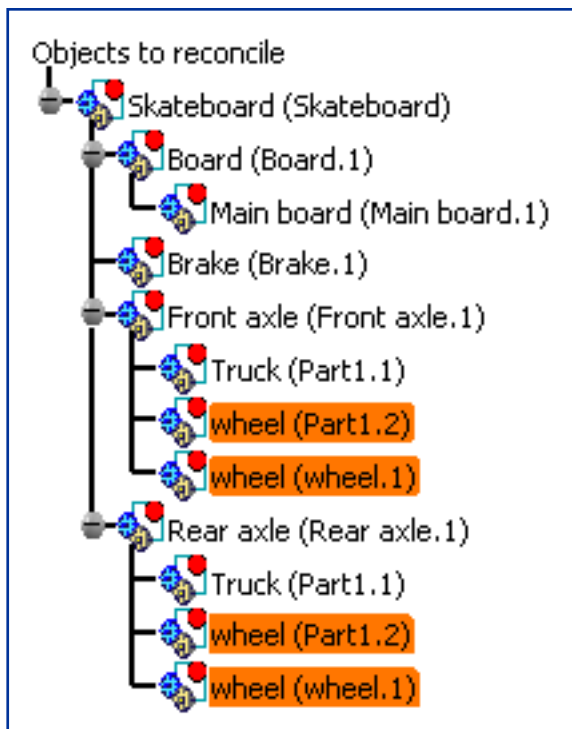

List View	3D Viewer	2D Viewer		
ID	Rule	Type	Environment	
Skateboard	Not set	Instance	SmarTeam	
Board.1	Not set	Instance	SmarTeam	
Main board.1	Not set	Instance	SmarTeam	
Brake.1	Not set	Instance	SmarTeam	
Front axle.1	Not set	Instance	SmarTeam	
Part1.1	Not set	Instance	SmarTeam	
Part1.2	Not set	Instance	SmarTeam	
wheel.1	Not set	Instance	SmarTeam	
Rear axle.1	Not set	Instance	SmarTeam	
Part1.1	Not set	Instance	SmarTeam	
Part1.2	Not set	Instance	SmarTeam	
wheel.1	Not set	Instance	SmarTeam	

5. Click OK when done.




Using the Sort Tool



This task shows you how to sort objects to reconcile in the **List View**.



1. In CATIA, open any product to reconcile.
2. [Display the Reconcile Window](#).
3. Select the **Part&Document** view and click the **List View** tab.
4. In the **CATIA View**, click any document you wish to be considered as new.
5. Click **New Object** .
It will be considered as a new document when saved in the database.
6. In the **List View** field, click the top of the **Rule** column.
The **Rule** column is sorted accordingly. The arrow indicates whether the column is sorted by ascending order or descending order.

List View	3D Viewer	2D Viewer	
ID	Rule	Type	Environment
Brake.CATPart	New	CATPart	SmarTeam
Skateboard	Not set	Part	SmarTeam
Board.CATPro...	Not set	CATProduct	SmarTeam
Board	Not set	Part	SmarTeam
Main_board.C...	Not set	CATPart	SmarTeam
Front_axle.C...	Not set	CATProduct	SmarTeam
Front axle	Not set	Part	SmarTeam
Truck.CATPart	Not set	CATPart	SmarTeam
wheel.CATPart	Not set	CATPart	SmarTeam
Rear_axle.CA...	Not set	CATProduct	SmarTeam
Rear axle	Not set	Part	SmarTeam
Skateboard.C...	Not set	CATProduct	SmarTeam




Using the Viewers




This task shows you how to use the viewers to visually compare the object loaded in the CATIA session and the one stored in SmarTeam.



1. In CATIA, open any product to reconcile.
2. [Display the Reconcile Window.](#)
3. Click the **3D Viewer** tab.
The CATIA 3D and the PDM 3D Viewer are displayed.
The 3D visualization is available:
 - in the PDM view for CATPart documents and CATIA V4 models
 - in the CATIA view for CATProducts, CATParts and CATIA V4 models.

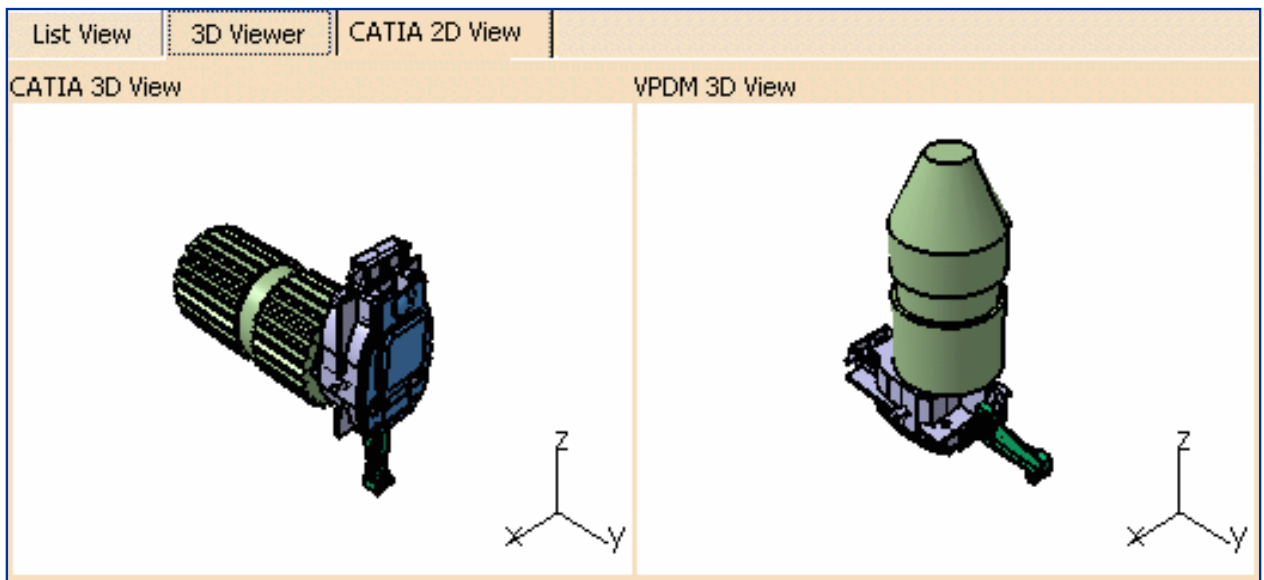


4. In both viewers you can zoom out or rotate the geometry as you usually do in CATIA.

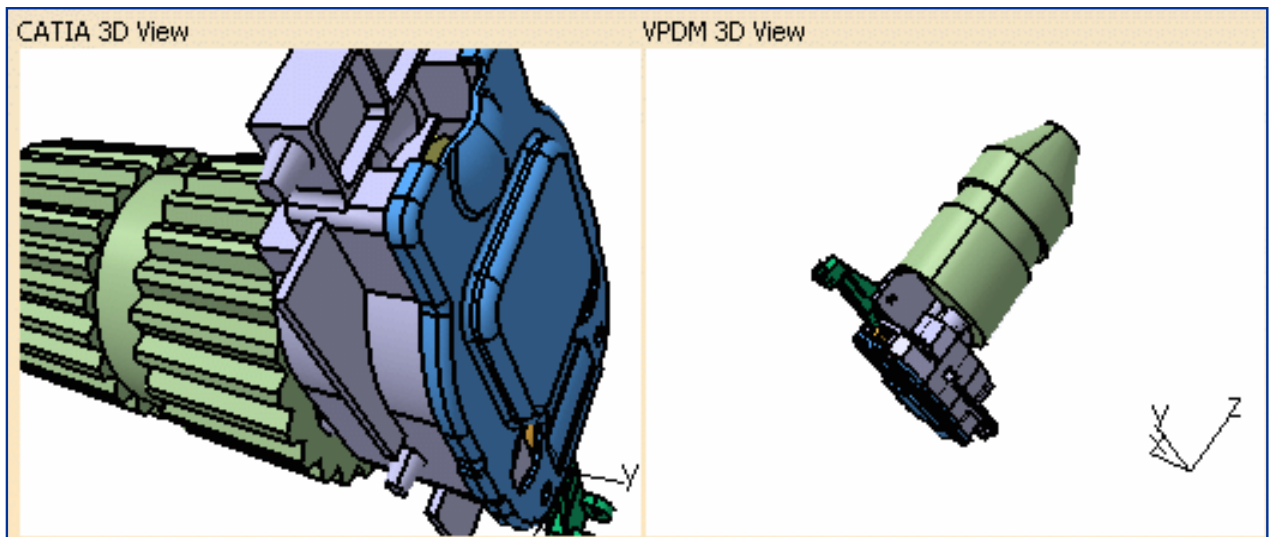


5. Click **Fit All In** .

Fit All In zooms the current view out so that all the document contents fit into the space available in the geometry area.

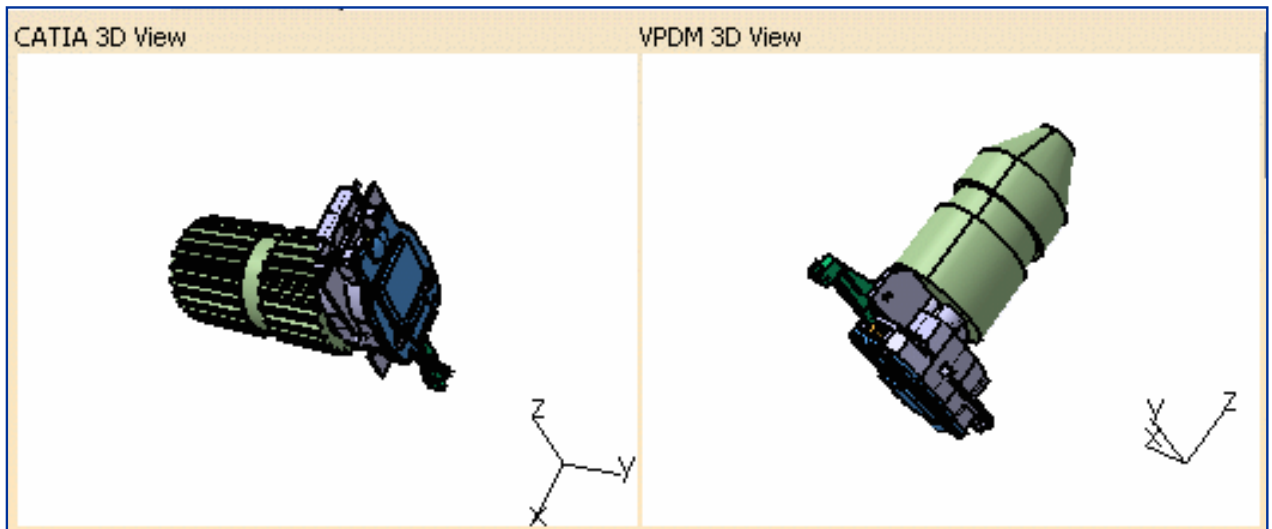


6. Select **Dependent** to be able to rotate and zoom both views simultaneously.
7. For example, rotate out any view.
Both views are rotated simultaneously, as the **Dependent** option is on.

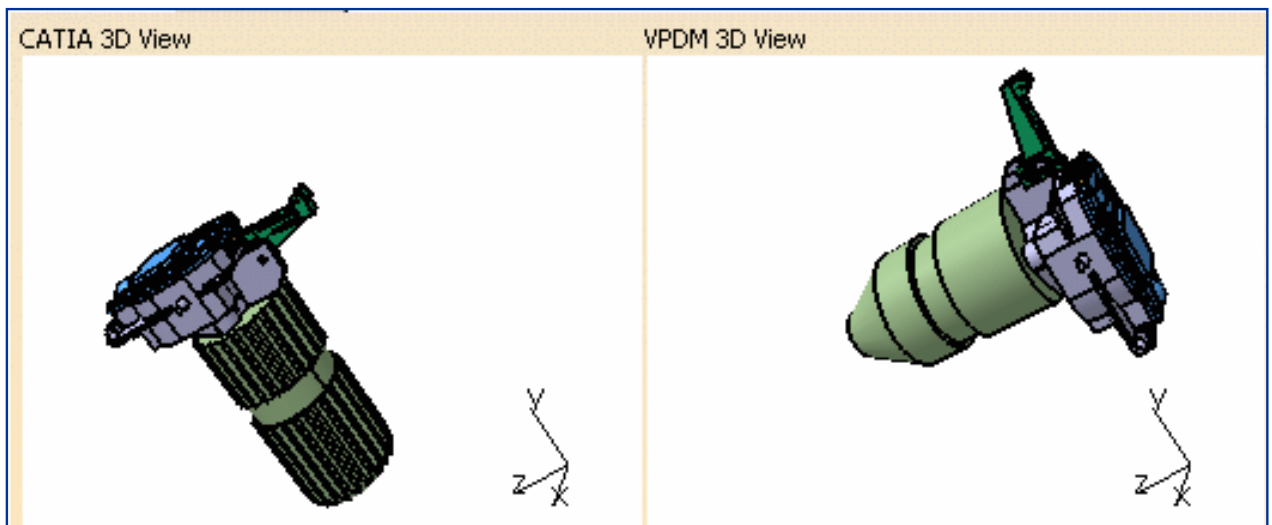


Showing Profile Cards

 This task shows you how to access SmarTeam profile cards for the documents of your choice.

 In CATIA, open any product to reconcile and [display the Reconcile Window](#).


-  **1.** In **CATIA View** right-click the object which profile card you want to see.
- 2.** Select **Show Profile Card** in the contextual menu.

The profile card corresponding to the document is displayed.

-  **Show Profile Card** is available only if the document has been mapped onto a SmarTeam object.
- You cannot use this capability after multi-selecting objects.




Automating Reconciliations Using the Automatic Pre-selection Command

 This task shows you how to ensure that each time you launch the **Reconcile Window**, queries, identification of targeted SmarTeam Documents and selection of reconciliation rules are done automatically.

The **Automatic Pre-selection** command is a way of drastically saving time.




1. In the **CATIA View** tab, select the root document -Skateboard (skateboard)- from the **Objects to reconcile** tree.
2. Click the **Global Set** tab.
3. Select **Automatic pre-selection** from the list of options.

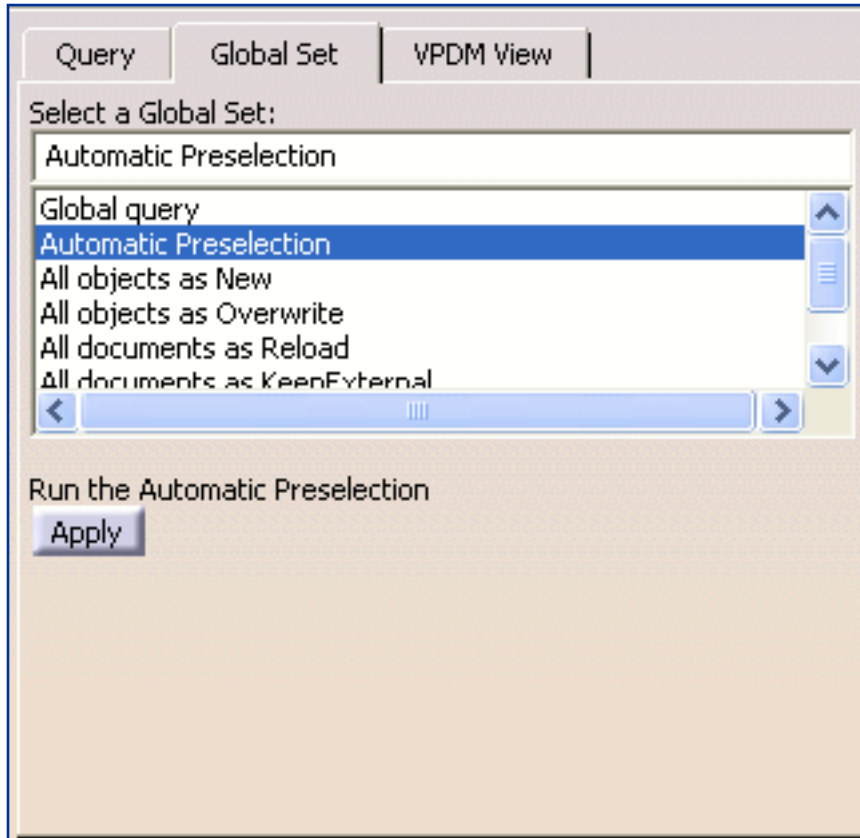


In only one operation, **Automatic preselection**:

- runs **Latest Available Revision** on all the objects
 - sets reconciliation rule (explained above) on all possible objects using some predefined laws (explained later)
4. Click **Apply** to confirm the operation.
The **Global Set** dialog box is displayed.

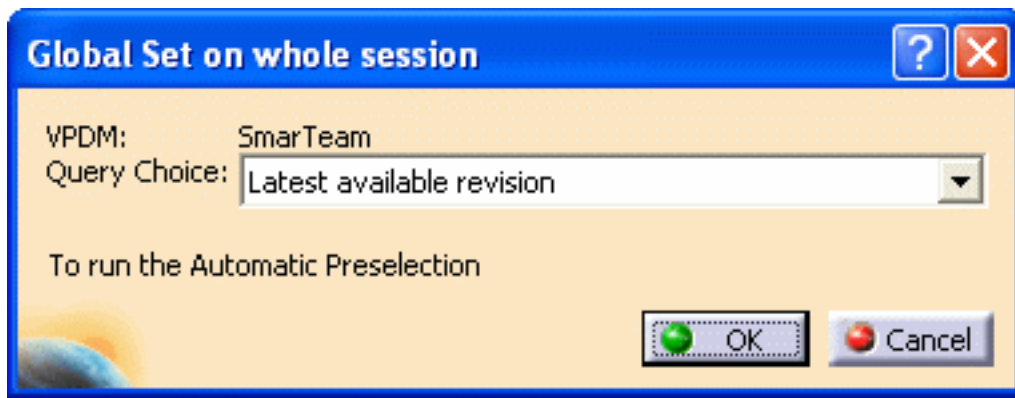

5. Click **OK** to confirm your query choice.
The documents making up the assembly in your CATIA session have been mapped and reconciliation rules are set.
Note that if need be, at that stage, you still can change the mapping and reconciliation rules manually.

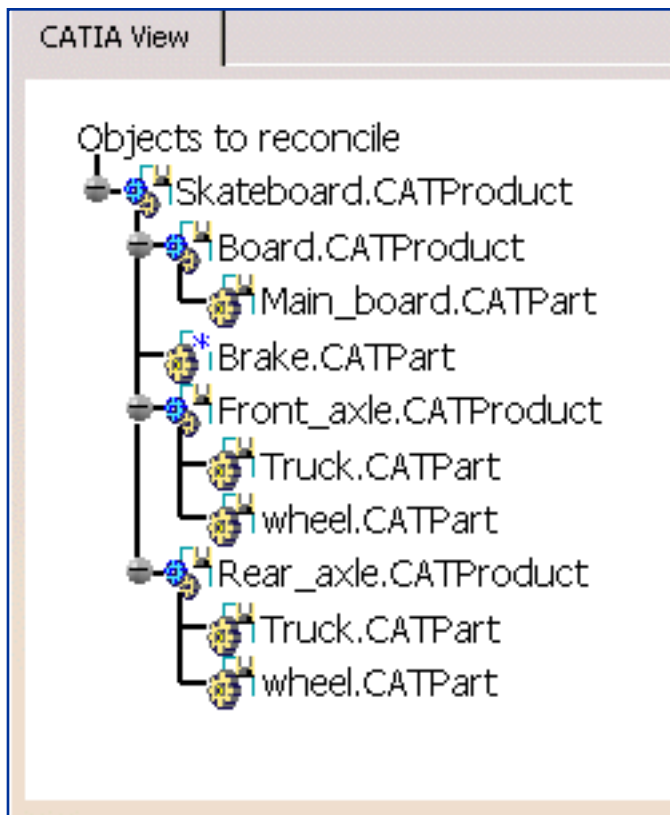

6. Click **Apply** to confirm the reconciliation operation.

More About the Automatic Pre-selection

Before using automatic pre-selection, you should be familiar with the following information:





Query

Queries are always performed using the criteria defined thru the SmarTeam


Integration Tool Setup utility. This utility enables administrators to map properties from CATIA directly to an object's profile card.

Reconciliation Rules

When using automatic pre-selection, reconciliations rules are set as follows:

- If the mapping process, that is the identification of targeted SmarTeam documents, results with no documents found in the SmarTeam database, the rule applied to documents is **New**  or **Keep As External**  in case there are broken links .
- If the mapping process is successful and that targeted SmarTeam documents:
 - were not modified, the rule applied to documents is **Reload** .
 - were modified, the rule applied to documents is **Overwrite** .

Note

The **Overwrite**  rule is always applied to documents proceeding from ENOVIA as well as to documents handled in a SmarTeam to SmarTeam exchange environment, that is to documents used by OEMs and their suppliers, all of them working with SmarTeam databases. In such environments, documents are seen as modified due to attribute mappings and especially to the revision mappings.

Using Databases Anterior to V5R18

If you are using a SmarTeam database anterior to V5R18, administrators need to create a new attribute as explained in [Customizing Pre-V5R18 Databases to use Automatic Pre-selection](#).

Quickly Launching Automatic Pre-Selection

It is possible to launch the automatic pre-selection capability as soon as you run ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange. For this, you just need to ensure that CATIA_TEAM_PDM_SEE_AUTO_PRESELECTION environment variable is set. Using this environment variable, you no longer need to perform the steps described in the scenario above.



Automating Reconciliations Using the CATPDMReconcileSTBatch Tool



In this page, you will find information about how to automate the reconciliation process. The method described here is particularly recommended for large assemblies. It allows you to gain a considerable amount of time.

Two scenarios are described:

- [Running CATPDMReconcileSTBatch](#)
- [Reusing the Same Reconciliation Batch Process](#)

You can launch a reconciliation process via **CATPDMReconcileSTBatch**. The entire process will be automatic. It uses a particular syntax. The basic syntax must include:

- List of file names of the root documents (giving a list a file names is equivalent to launch interactively the reconciliation command from **File > Desk**).
- Rules to be applied on each document.
- SmarTeam user name and password for connection.

The batch process uses as input the root of the assembly on which the reconciliation will be done.



Running CATPDMReconcileSTBatch

As a reminder, when running batches, you must always use the `catstart` command to set the global environment (for more details, see the *Infrastructure Guide, Basic Tasks, Starting a Session on Windows*).

e.g. in a MS-DOS window:

1. Change to the default folder in which the product is installed. The default folder is:
`C:\Program Files\Dassault Systemes\B17\intel_a\code\bin`
2. Set the global environment.
`catstart -env CATIAR17 -direnv D:\CATIAEnv`
3. Start the reconcile batch

```
CATPDMReconcileSTBatch -user -joe -file "E:\BatchReconile\RootProduct.CATProduct" -simul Rule
```

Syntax

The syntax to be used is the following:

```
CATPDMReconcileSTBatch -user xxx [-pwd xxx] [-spwd xxx] -file filename [-simul (Execute|Rule|NoRule)] [-  
reload docname] [-keepExternal docname] [-newFrom object] [-inxml filename] [-  
completeWithDefaultMapping] [-epexml fileName] [-queryName queryname][--autoPreselect] [--noCheckout] [-  
xml filename] [--checkDoc numberOfDocs] [--outputFileList filename]
```

Note: "filename" stands for the document path and "docname" for the document name.

As described in the following table, all parameters are not required. The parameters can be written in any order. In case of missing, wrong or conflicting parameters, an error message is contained in the trace file (see [Diagnostics](#)).

Parameter	Description	Mandatory/Optional
-help	Help	optional
-user xxx	User for SmarTeam connection.	mandatory
-pwd xxx	User password for SmarTeam connection.	Optional if no password is required for the connection; mandatory otherwise.
-spwd xxx	Secured password for SmarTeam connection. To be able to use this keyword an implementation of CATIUExitCrypt must be implemented and declared through the late type CATUExitCrypt .	Optional if no password is required for the connection; -pwd or -spwd are mandatory otherwise.
-file filename	Name of the CATIA file to be loaded and reconciled. Several file statements are possible (-file c:\supplier\Part1.CATPart -file c:\supplier\Part2.CATPart).However only one root product could be reconciled (see Restrictions)	mandatory

-simul <code>Execute Rule NoRule</code>	<p>Enable not to execute Save or Apply in SmarTeam database.</p> <p>Execute means that reconciliation is applied, but the save is not done. Performs automatic CO/ NewRelease if overwrite rule is set.</p> <p>Rule means that the mapping and rules are set but neither the reconciliation is applied nor the save is done</p> <p>NoRule means that only reconciliation session creation is done. This is equivalent to run the interactive reconcile command without doing anything else.</p> <p>If the -simul option is not set, the reconciliation will be applied and if the reconciliation is successful, a save will be done in the SmarTeam database. If the reconciliation is not successful, data are not saved in SmarTeam but checked-out documents are kept ; a report explaining the failure is also generated (see Diagnostics).</p>	optional
-reload <code>docname</code>	<p>Enable to set rule to Reload instead of Overwrite for an object with a specified name. Several reload statements are possible</p> <p>(-reload Part1.CATPart -reload Part2.CATPart)</p>	optional
-keepExternal <code>docname</code>	<p>Enable to set rule to Keep as External reference for an unloaded document. Several keepExternal statements are possible (-keepExternal Part1.CATPart -keepExternal Part2.CATPart)</p>	optional
-newFrom <code>object</code>	<p>>Enable to declare that one document will be saved as a new document in the database and a link will be created between this new document and the one which has been identified (by object).</p>	optional
-autoPreselect	<p>Execute Automatic Preselection on the assembly to be reconciled. Not to be used with any of the following options: <i>reload</i> and <i>keepExternal</i>.</p>	optional

-queryName queryname	Name of the criterion to be searched (Default is Query By Latest Available Revision). This is required when we have multiple queries and want to execute the non default query.	optional The default query is - Latest Available Revision-
-epexml filename	Enables to generate an EpeXML file that will be used with option -inxml	optional
-inxml filename	Enables to specify an input EpeXML file to restart the batch from a previous reconciliation session; this option should be used with - completeWithDefaultMapping if the XML file does not specify the mapping for all objects. (Format same as epexml file generated)	optional
-xml filename	Stream Reconciliation session in an XML file for reporting purpose.	optional
-completeWithDefaultMapping	In some cases (more than one query result), the mapping is not automatically done by the reconcile batch. Setting this parameter enable to map the CATIA document on the first query result if no other mapping is performed.	optional
-noCheckOut	<p>Does not Checkout/New Release a document in case of Overwrite rule on a document.</p> <p>This option has a real added value when -simul Execute option is set with some overwrite rules.</p> <p>When running the batch without -simul option, overwritten documents should be checked-out, otherwise the save will fail. The documents can be manually checked-out before running the reconcile batch or they can be automatically checked-out by the reconcile batch. In this case the -noCheckOut option should not be set otherwise the save will fail.</p>	optional

-checkDoc <i>number</i>	Provide number of expected documents in the Reconcile session. The number of documents loaded in the reconcile session should be the same than the number provided through the - checkDoc parameter otherwise the reconcile batch stops and fails.	optional
-outputFileList <i>filename</i>	Enables to define the path of an output file containing the CATIA file names that will be reconciled. The Output File generated is text file (.txt)	optional

Building the reconciliation session from information given in an input XML file enables the user to explicitly indicate which rule and mapping will be applied to each object to be reconciled.

The basic scenario is as follows:

1. First the batch user runs reconciliation in simulation mode (simulation mode is specified using the option `-simul` on the batch command line) and using the command line parameter `-epexml` so that the batch will generate an XML file (called EpeXML file) of the reconciliation session state. This XML file will be used as a pre-validated template in the ensuing steps.
2. The user will eventually have to complete the generated EpeXML file to resolve those ambiguities that were not resolved by the simulation (e.g. if the query returned several results, the mapping must be completed by hand). The user can also modify the EpeXML file to explicitly indicate the rule and mapping to be applied to a given object.
3. Then using the completed EpeXML file, the user reruns the reconciliation batch with the command line parameter `-inxml`.
4. The batch can be rerun multiple times using the same EpeXML file with `-inxml` command line parameter.

The reconcile batch sets the rules according to the following priorities:

1. If the options `-reload`, `-keepExternal`, `-autoPreselect`, are not set in the command line, the overwrite rule is applied on each mapped object, the new rule is applied on each object having no query result.
2. The `-reload`, `-keepExternal` options overwrite the previous rules on the specified document.
3. The `-autoPreselect` option sets the rules according to the specifications set in the Automatic Preselection. In such a case `-reload`, `-keepExternal` options are forbidden.

Rules can also be set through the epexml file:

Rule Name	Description
PUBEXP_OVERWRITEINPDM	Overwrite in SmarTeam repository
PUBEXP_RELOADFRMPDM	Reload from SmarTeam repository
PUBEXP_NEWOBJECT	New Object in SmarTeam repository
PUBEXP_EXTERNALREFERENCE	Keep External

Diagnostics

A summary of actions and a global status of the reconcile batch execution is written in the standard output file (the standard output file is controlled through the CNEXTOUTPUT environment variable). Possible exit status values are:

- 0: successful completion
- 4: failure due to one or more of the standalone documents
This diagnostic could be returned when the reconciliation is ran on several standalone documents (`-file Part1.CATPart -file Part2.CATPart`) and when the reconciliation is failing on one document but successful on other documents.
- 8: Failure due to any of the following:
 - Query failed
 - Load of SmarTeam data failed
 - Save of loaded data failed
- 202: Connection failed

Reusing the Same Reconciliation Batch Process

To re-run the reconciliation using the same mapping and rules, proceed as follows:

1. Run a reconciliation in simulation mode: the simulation mode is specified using `-simul` on the batch command line.
2. Ask the batch to dump the reconcile session using the `-epexml` command line parameter.
This generates a pre-validated template of the EpeXML file

You may need to complete the generated EpeXML file when some ambiguities were not resolved by the simulation (for example when the query returned several results, the mapping must be completed by hand).

3. Then use the completed EpeXML file to re-run the reconciliator batch with the `-inxml` command line parameter.
4. Re-run the script several times using the same EpeXML file with the `-inxml` command line parameter.
This EpeXML file will thus be generated by a reconciliation simulation. It is an xml file located in the directory specified thru the `-epexml` parameter.

XML File Description

XML files can be generated for two purposes:

- for Reporting purpose (`-xml` option)
- for Stop/Restart purpose (`-epexml` option).

The table below compares the content of both files:

	XML for Report (-xml)	EpeXML for Stop/Restart (-epexml)
Description	Light dump of the Reconcile Session: it sums up for each object to reconcile its characteristics (Name, PDM environment, storage mode, reconciliation rule, Identifier) and comparison status**.	All information needed to rebuild the Reconcile Session is dumped. That is for all documents the exposition mode, the mapping and rule to apply. The list of Query result is also dumped.
Usage	To have a report of what will be done in the reconciliation session at execution. The layout of the report could be customized through definition of a xsl document.	To be able to rebuild a reconciliation session several times using same mapping and rules.
Content under document and proxy-document tags	<p>FileName + Path + DocType</p> <p>Rule + PersistencyMode</p> <p>Mapping: the selected PdmObject+its attributes*</p> <p><Query result not present></p>	<p>FileName + Path + DocType</p> <p>Rule + PersistencyMode</p> <p>Mapping: the PdmObject+its attributes*</p> <p>List of query result (PdmObjects), the one used for mapping is differentiated using an attribute selected=-yes-.</p>
Content under Part tags	<p>PartName + isRoot</p> <p>Rule + PersistencyMode</p> <p>Mapping: the selected PdmObject+its attributes*</p> <p>< Query result not present ></p> <p>Comparison status**</p>	<p>PartName + isRoot</p> <p>Rule + PersistencyMode</p> <p>Mapping: the PdmObject + its attributes*</p> <p>List of query result, the one used for mapping is differentiated using an attribute selected=-yes-.</p> <p><Comparison status not present></p>

Content under AR tags	Name	Name
	Comparison status**	<Comparison status not present>


Notes

*The Number of PdmObject Attributes will vary as per the configuration used for query in Integration Tools Setup.

**SmarTeam does not set any comparison status: default value of the status is -New-.

Samples of the Different Versions of the XML File:

The samples provided were generated using the following assembly structure:

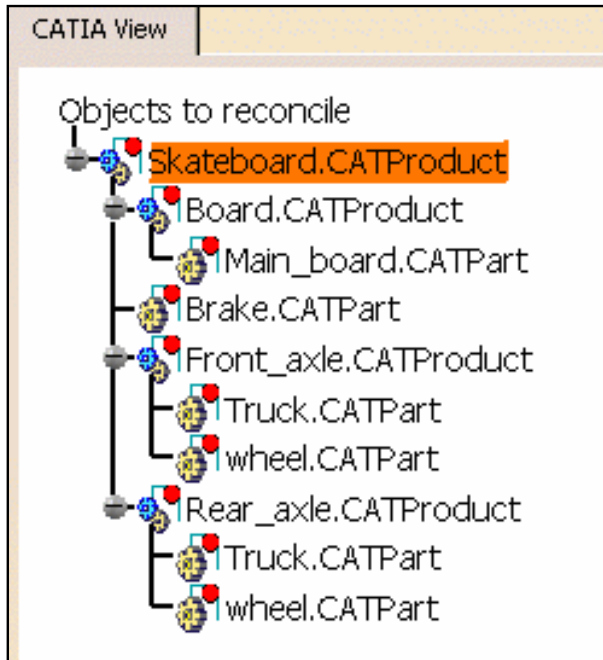

Sample of an EPXML File for StopRestart

This file has been generated by the reconcile batch process. It could be used without any modification to re-run the reconcile batch process with the `-inxml` parameter because all documents are mapped and a rule is also set for all objects. In this example it is possible to modify the Rule value.

```
CATPDMReconcileSTBatch -user joe -file E:\Data\Skateboard\supplier\Skateboard.CATProduct -simul Rule -epexml e:\Data\Skateboard\epexml.xml
```

```
<?xml version="1.0" encoding="UTF-8" ?>
<!-- COPYRIGHT DASSAULT SYSTEMES 2005 - > f(clean);
- <Session Name="Reconcile Session" Env="TeamPDM" Status="None">
- <Document Name="Skateboard.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
\Skateboard.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="0_764_412b30e3_827" PdmName="688_1187"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Skateboard</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Skateboard</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRD-0060</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Skateboard.CATProduct</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Board.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
\Board.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e3_809" PdmName="688_1188"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Board</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Board</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRD-0061</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Board.CATProduct</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Main_board.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier
\Main_board.CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="0_1064_40d80b7e_3da" PdmName="687_1189"
PdmType="CATPart" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Main_board</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Main board</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRT-0243</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Main_board.CATPart</PdmObjectAttr>
```

```

    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Front_axle.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
\Front_axle.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e6_81d" PdmName="688_1190"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">Front_axle</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">Front axle</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRD-0062</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">Front_axle.CATProduct</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Truck.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\Truck.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="0_1064_40d80c50_679" PdmName="687_1191"
PdmType="CATPart" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">Truck</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">Truck</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRT-0244</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">Truck.CATPart</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="wheel.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\wheel.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="0_1064_40d80d78_743" PdmName="687_1192"
PdmType="CATPart" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">wheel</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">wheel</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRT-0245</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">wheel.CATPart</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>

```

```

- <Document Name="Rear_axle.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
\Rear_axle.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
- <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e8_831" PdmName="688_1193"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Rear_axle</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Rear axle</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRD-0063</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Rear_axle.CATProduct</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
  <Document Name="Brake.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\Brake.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_NEWOBJECT" />
</Session>

```

Sample of Batch Reconcile Command

Two methods are available:

- [From an xml input file](#)
- [Run the batch reconciliation using the command](#)

From an xml input file

1. Open the epexml.xml file previously generated.
2. Change the rules from PUBEXP_OVERWRITEINPDM to PUBEXP_RELOADFRMPDM on the following documents:
Front_axle.CATProduct, Rear_axle.CATProduct, Truck.CATPart, Wheel.CATPart
3. Save the file under inxml.xml.

```

<?xml version="1.0" encoding="UTF-8" ?>
  <!-- COPYRIGHT DASSAULT SYSTEMES 2005 - > f(clean);
  - <Session Name="Reconcile Session" Env="TeamPDM" Status="None">
  - <Document Name="Skateboard.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
    \Skateboard.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
  - <PdmObject selected="true" PdmId="0_764_412b30e3_827" PdmName="688_1187"
    PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">Skateboard</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">Skateboard</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRD-0060</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">Skateboard.CATProduct</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
  </PdmObject>
</Document>
  - <Document Name="Board.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
    \Board.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
  - <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e3_809" PdmName="688_1188"
    PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">Board</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">Board</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRD-0061</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">Board.CATProduct</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
  </PdmObject>
</Document>
  - <Document Name="Main_board.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier
    \Main_board.CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_OVERWRITEINPDM">
  - <PdmObject selected="true" PdmId="0_1064_40d80b7e_3da" PdmName="687_1189"
    PdmType="CATPart" PdmProvider="TeamPDM_Provider">
    <PdmObjectAttr name="Description">Main_board</PdmObjectAttr>
    <PdmObjectAttr name="Part Number">Main board</PdmObjectAttr>
    <PdmObjectAttr name="ID">CATPRT-0243</PdmObjectAttr>
    <PdmObjectAttr name="Application Reference File Name">Main_board.CATPart</PdmObjectAttr>
    <PdmObjectAttr name="Revision" />
    <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
  </PdmObject>
</Document>
  - <Document Name="Front_axle.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier

```

```

\Front_axle.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_RELOADFRMPDM">
- <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e6_81d" PdmName="688_1190"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Front_axle</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Front_axle</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRD-0062</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Front_axle.CATProduct</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Truck.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\Truck.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_RELOADFRMPDM">
- <PdmObject selected="true" PdmId="0_1064_40d80c50_679" PdmName="687_1191"
PdmType="CATPart" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Truck</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">Truck</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRT-0244</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">Truck.CATPart</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="wheel.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\wheel.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_RELOADFRMPDM">
- <PdmObject selected="true" PdmId="0_1064_40d80d78_743" PdmName="687_1192"
PdmType="CATPart" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">wheel</PdmObjectAttr>
  <PdmObjectAttr name="Part Number">wheel</PdmObjectAttr>
  <PdmObjectAttr name="ID">CATPRT-0245</PdmObjectAttr>
  <PdmObjectAttr name="Application Reference File Name">wheel.CATPart</PdmObjectAttr>
  <PdmObjectAttr name="Revision" />
  <PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
- <Document Name="Rear_axle.CATProduct" Type="CATProduct" File="E:\Data\Skateboard\supplier
\Rear_axle.CATProduct" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_RELOADFRMPDM">
- <PdmObject selected="true" PdmId="f1b3f3f3_7a0_42dcc5e8_831" PdmName="688_1193"
PdmType="CATProduct" PdmProvider="TeamPDM_Provider">
  <PdmObjectAttr name="Description">Rear_axle</PdmObjectAttr>

```

```

<PdmObjectAttr name="Part Number">Rear axle</PdmObjectAttr>
<PdmObjectAttr name="ID">CATPRD-0063</PdmObjectAttr>
<PdmObjectAttr name="Application Reference File Name">Rear_axle.CATProduct</PdmObjectAttr>
<PdmObjectAttr name="Revision" />
<PdmObjectAttr name="State">Checked In</PdmObjectAttr>
</PdmObject>
</Document>
<Document Name="Brake.CATPart" Type="CATPart" File="E:\Data\Skateboard\supplier\Brake.
CATPart" Mode="PUBLICATION_EXPOSED" Rule="PUBEXP_NEWOBJECT" />
</Session>

```

4. Run the batch reconciliation using the command:

```
CATPDMReconcileSTBatch -user joe -file E:\Data\Skateboard\supplier\Skateboard.CATProduct -inxml e:\data\Skateboard\inxml.xml
```

Run the batch reconciliation using the command

1. Run the batch reconciliation using the command:

```
CATPDMReconcileSTBatch -user joe -file E:\Data\Skateboard\supplier\Skateboard.CATProduct -reload Front_axle.CATProduct -reload Rear_axle.CATProduct -reload Truck.CATPart -reload Wheel.CATPart
```

Restrictions

The following restrictions apply to the **CATPDMReconcileSTBatch** tool:

- Only one assembly structure
The `-file` option can be used to reconcile several CATProducts, but the reconciliation will succeed only if all the listed CATProducts compose the same assembly structure: only one assembly root per reconciliation is accepted.
- Batch reconciliation does not call CheckOut on the link-dirty documents due to Checkout performed on the objects with Overwrite rule. This can be resolved by opening the final assembly in CATIA and when you connect to SmarTeam, all the Check Out messages will be displayed.

NB: The final assembly is saved (SmarTeam save) if the `-simul` option is not set and if the reconciliation is successful. The checked-out and new documents will be saved in the work directory.

- **-spwd** option:
 - This information cannot be hidden if running processes are listed using the `ps -ef | grep pwd` command.

- The **-spwd** and **-pwd** options are incompatible, i.e., cannot be used at the same time.


Accessing the Help Information



To retrieve the help information about **CATPDMReconcileStBatch**, just enter:

```
CATPDMReconcileSTBatch -help
```



Generating a Reconciliation Report

 This task shows you how to generate a report showing the rules you have applied or not to the documents you want to reconcile.


-  1. Click **Report** .
- The report is displayed in a viewer. For each object, it sums up its characteristics (Name, PDM environment, storage mode, reconciliation rule, PDMID) and comparison status.
- The layout of the report can be customized to fit your needs. For more information, see [Customizing Report Layouts](#).



2. If need be, print the report.





Interface Description

To display the **Reconcile window**, select **SmarTeam>Collaboration>Launch Reconciliation** or click **Launch Reconciliation**  from the **Reconcile toolbar**



Click the hot spots to access the related documentation.

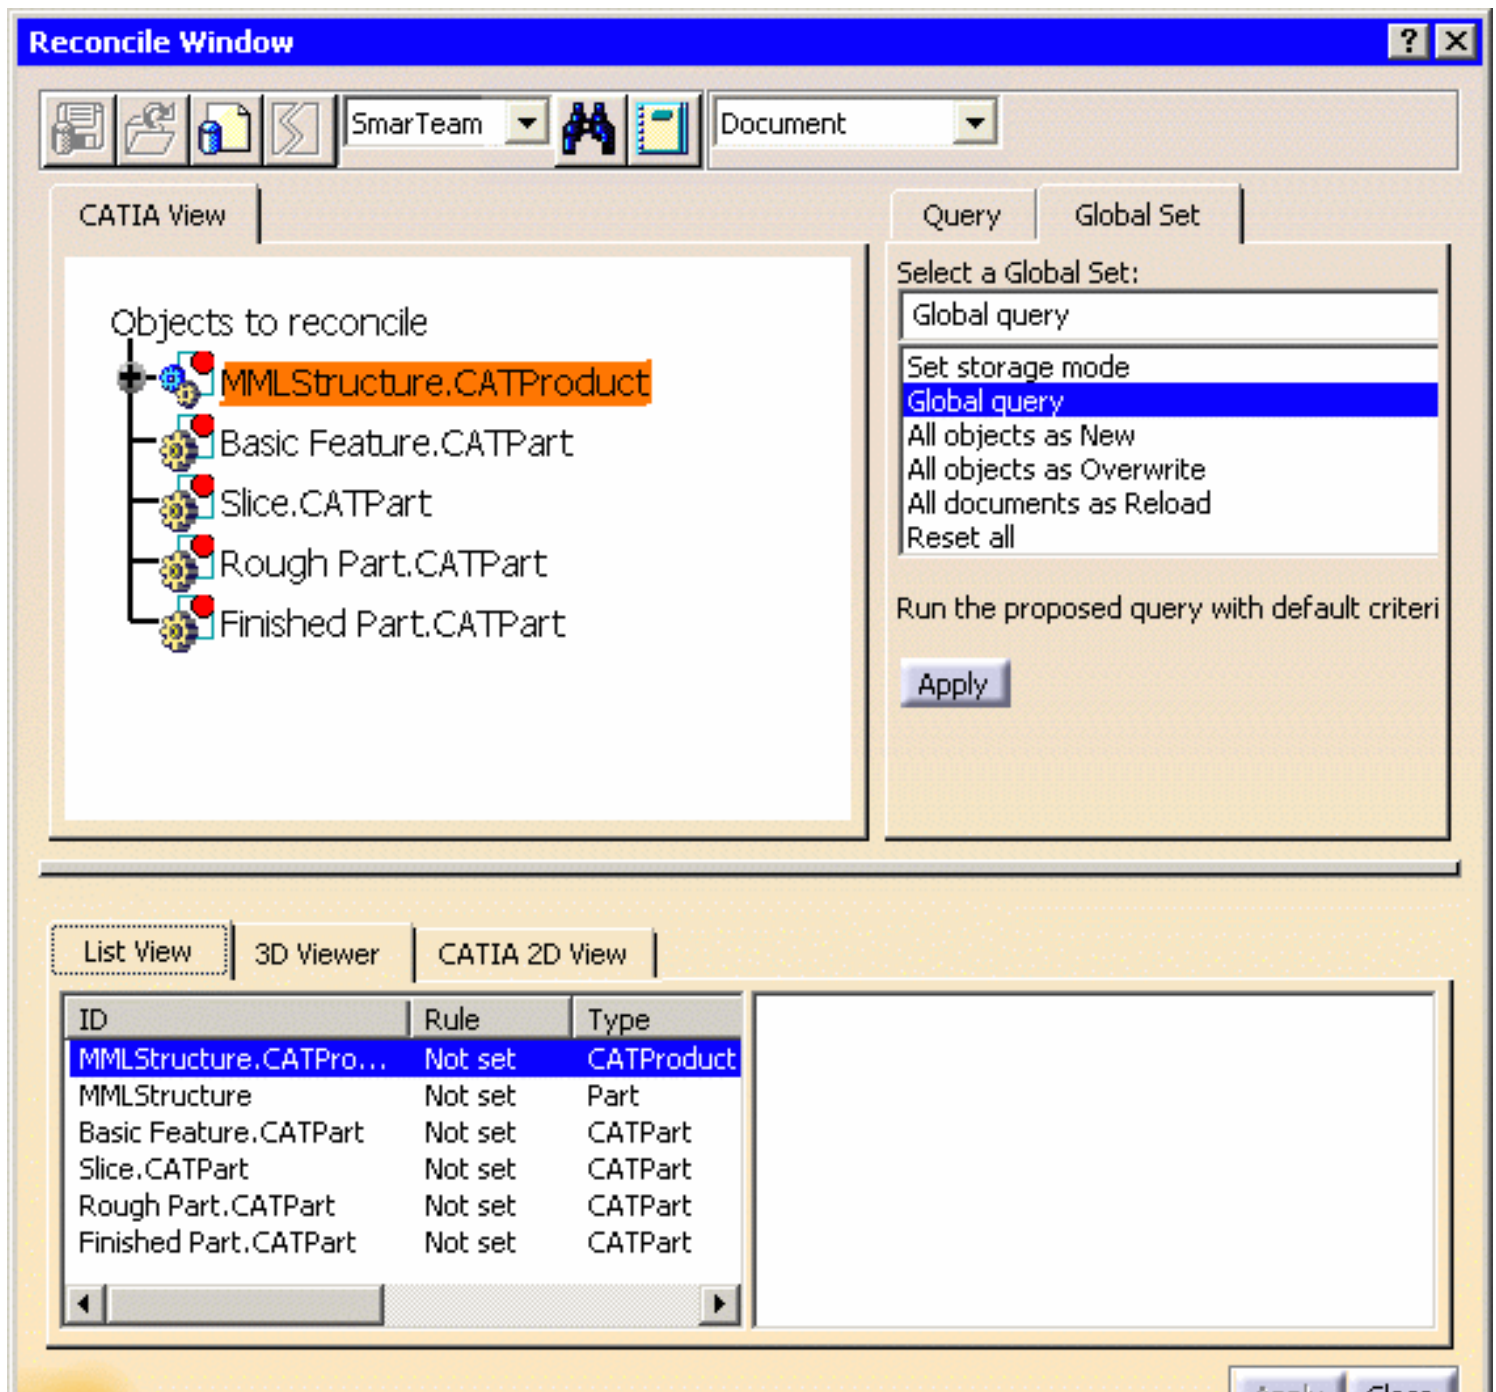

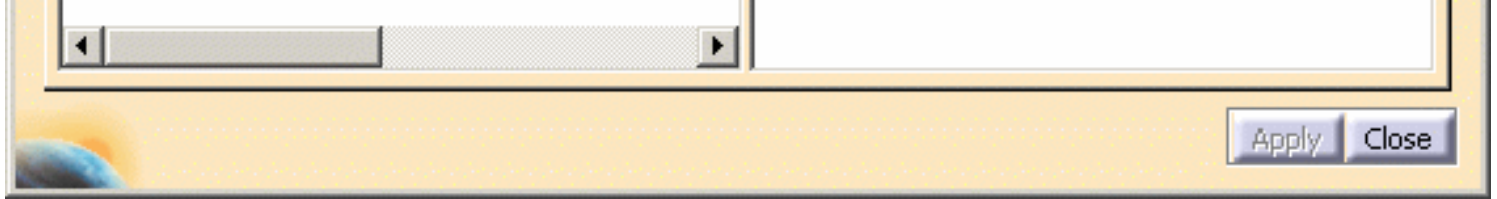

Actions Toolbar
CATIA View Tab
Query, Global Set Tabs
List View, 3D Viewer and CATIA 2D View Tabs

Actions Toolbar



The actions toolbar enables you to set perform the following actions on the objects to reconcile:

- [Setting Reconciliation Rules](#)
- [Locating Objects By Attributes](#)
- [Selecting The View Type](#)

Setting Reconciliation Rules

The **Reconciliation Rules** toolbar enables you to define if the object to store is to be considered as new (**New**), if the PDM version is to be kept (**Reload**) or if the CATIA version will replace the information stored in the PDM repository (**Overwrite**).



Overwrite in SmarTeam: The object loaded in the CATIA session overwrites the one stored in the PDM repository. See [Defining Reconciliation Rules](#).



Reload from SmarTeam: The SmarTeam object version is kept. See [Defining Reconciliation Rules](#).



New Object in SmarTeam: The object is considered as a new one. See [Defining Reconciliation Rules](#).



Keep as External: The broken link will be accepted as "broken" during the reconciliation process. After saving the documents in the database, the external reference will remain "broken". See [Managing Broken Links](#).

Locating Objects By Attributes



Locate object by attribute: searches for objects to reconcile using their attributes values in the Objects to reconcile tree and in the List View according to the attribute selected in the Locate dialog box. See [Using the Locate Tool](#).

Generating a Report



Report: generates a report on the different reconciliation options you set for the documents to be reconciled. See [Automating Reconciliations Using the Automatic Pre-selection Command](#).


Selecting the View Type

This scrolling list enables you to select the view type you want to display in the CATIA View:



- **Document:** represents the documents to be reconciled as a tree of documents. This is the default view.
- **Instance:** Both tabular and graph views represent the CATIA Product structure view, i.e. the objects presented with instances.

CATIA View Tab

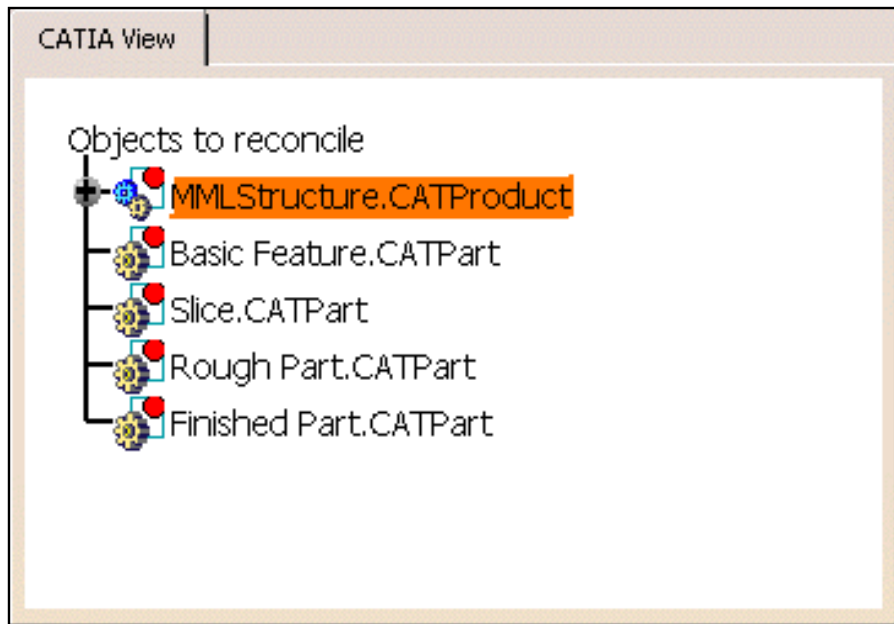

Objects

The **Object to reconcile** tree displays the files making up the selected product.

The items displayed in the objects to reconcile tree depend on the selection you made:



- **Part & Document:** Displays the objects to reconcile as reference objects (documents) at the first level. At the second level, the Parts are shown.
- **Instance:** Presents a product structure view and all documents that are linked to this product structure.

The different components are displayed along with an icon indicating their status:

Part and Document View

-  Refers to a Part contained in a CATProduct saved in Publications Exposed storage mode.

Instance View

-  Indicates that the mapping between the CATIA and the SmarTeam object is one, but the reconciliation rule is not set.
-  Indicates that the reconciliation rule is not set.

Contextual Commands


The following contextual commands are available from each object:

- **Overwrite:** See [Defining Reconciliation Rules](#).
- **Reload:** See [Defining Reconciliation Rules](#).


- **New:** See [Defining Reconciliation Rules](#).
- **Keep as External References:** See [Managing Broken Links](#).
- **Reset:** See [Undoing Document Mapping](#)
- **Query...:** See [Query Contextual Command](#)
- **Show Profile Card:** See [Showing Profile Cards](#)
- **Locate:** See [Using the Locate Tool](#).

Query, Global Set and VPDM View Tabs

Query Tab

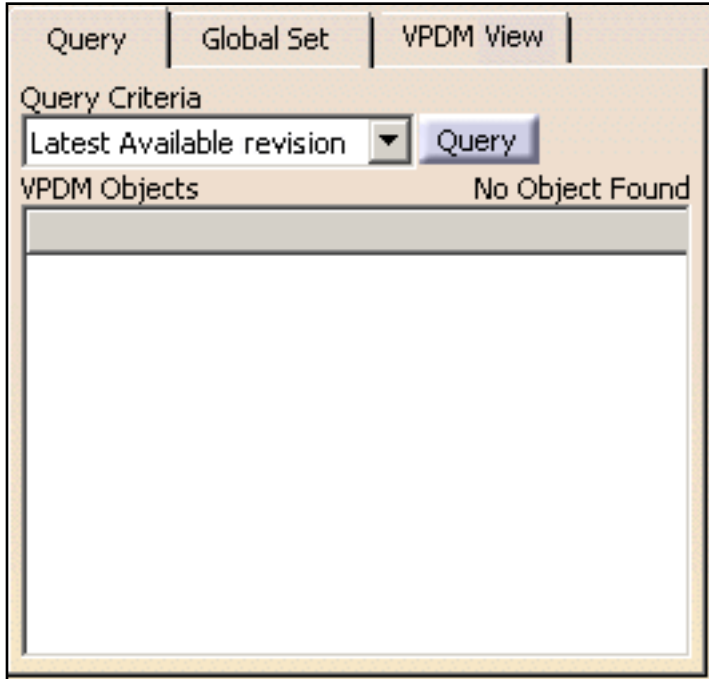

Query Criteria

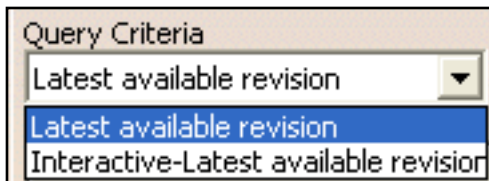

There are two different query criteria available:


- Latest available revision
- Interactive- Latest available revision

Objects

VPDM Objects		1 VPDM Object Found	
Description	Application Reference File Name	Revision	State
Skateboard	Skateboard.CATProduct	a.0	2

Enables you to display a tree based on the expanded PDM root product corresponding to the CATIA root product. this tree is displayed only after the root Part of the assembly structure has been mapped.

Global Set Tab

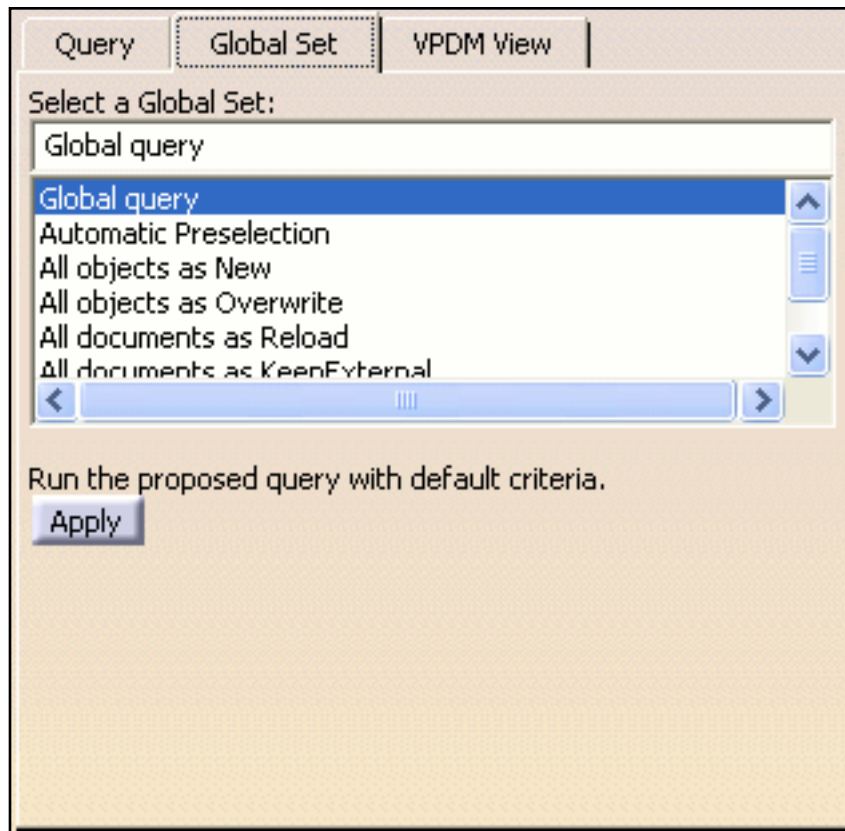

Enables you to [automate the valuation of the reconciliation rules](#).

Global query

Enables you to perform a query using the **Latest available revision** criteria.


When you select this option and click the **Apply** button, a dialog box is displayed, prompting you to apply the implicit rules after the query. This query is used to automate the mapping of all objects to reconcile. If the query returns only one result then this result will be mapped to the object on which the query was run.

Automatic Pre-selection

Enables you to automatically perform queries, identification of targeted SmarTeam Documents and selection of reconciliation rules each time you launch the **Reconcile Window**.

All objects as New	Enables you to set all objects to New. When you select this option and click the Apply button, a dialog box is displayed. If you check the Force mapped object to New option, all the objects, even those that are already mapped, will be set to New .
All objects as Overwrite	Enables you to set all mapped objects with no rule to Overwrite. When you select this option and click the Apply button, a dialog box is displayed. If you check the Force all to Overwrite , the rules that were previously applied to these objects will be overwritten.
All objects as Reload	Enables you to set all mapped documents to Reload. When you select this option and click the Apply button, a dialog box is displayed. If you check the Force all documents to Reload , all existing rules will be overwritten and replaced with Reload.
All objects as Keep External	
Reset all	Enables you to reset all objects mapping and/or rules. When you select this option, and click the Apply button, a dialog box is displayed. You may then decide to reset only the rules or the rules and the mapping.

VPDM View Tab

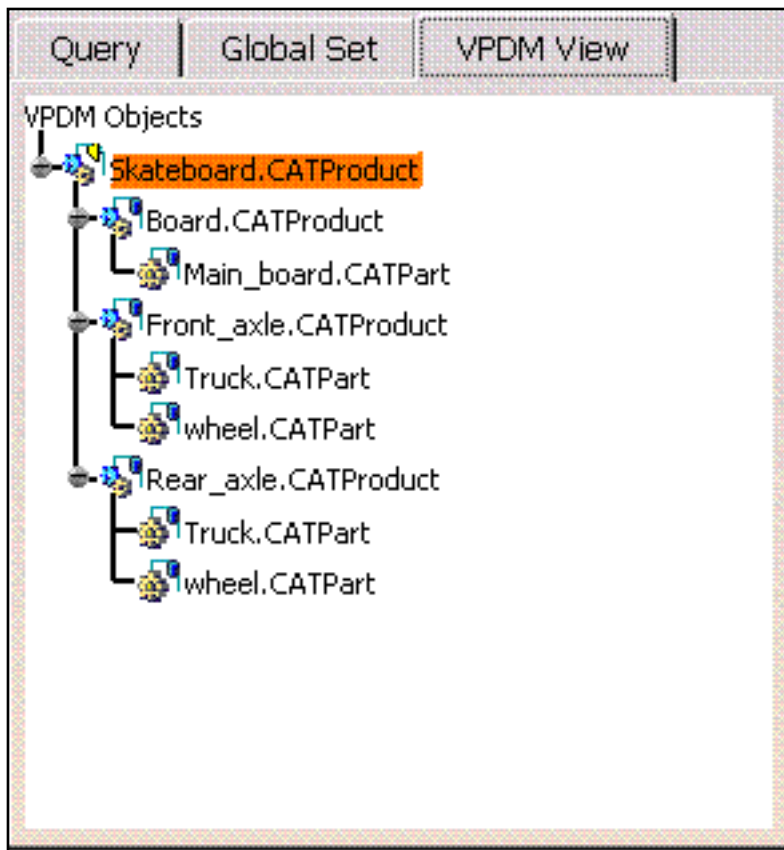

Displays a tree based on the expanded SmarTeam root product corresponding to the CATIA root product. This tree is displayed only after the root Part of the assembly structure has been mapped. This allows you to use this view to establish a mapping between one CATIA object and a SmarTeam object.

List View, 3D Viewer and CATIA 2D View Tabs

List View Tab

List View	3D Viewer	CATIA 2D View		
ID	Rule	Type	Document	Environment
PN CATPRD-0052	New	Instance	Mechanical systm._VER2.CATProduct	SmarTeam
Crowbar.1	Re-load	Instance	Crowbar.CATPart	SmarTeam
Cutting Mechanism.1	Re-load	Instance	Cutting_Mechanism.CATProduct	SmarTeam
Cover.1	Re-load	Instance	Cover.CATPart	SmarTeam
Internal_carter.1	Re-load	Instance	Internal_Carter.CATProduct	SmarTeam
bagueD7.1	Not set	Instance	Ring_D7.CATPart	SmarTeam
Coussinet-cyl.1	Not set	Instance	Cylindre_Block.CATPart	SmarTeam
Part1.1	Overwrite	Instance	Engine_Carter.CATPart	SmarTeam

The **List View** is a tabular view of the reconciliation tree.

ID Indicates the name of the displayed object.

Rule Indicates the rule applied to the document: **Overwrite in SmarTeam**, **Reload from SmarTeam**, or **New Object in SmarTeam**

Type Indicates the type of the displayed object:


- Part and/or Product if **Part & Document** is selected in the scrolling list or
- Instance if **Instance** is selected in the scrolling list.

Document Indicates the name and the path of the document.

Environment Indicates the selected database (SmarTeam).


For more information, see [Using the Sort Tool](#).

3D Viewer Tab

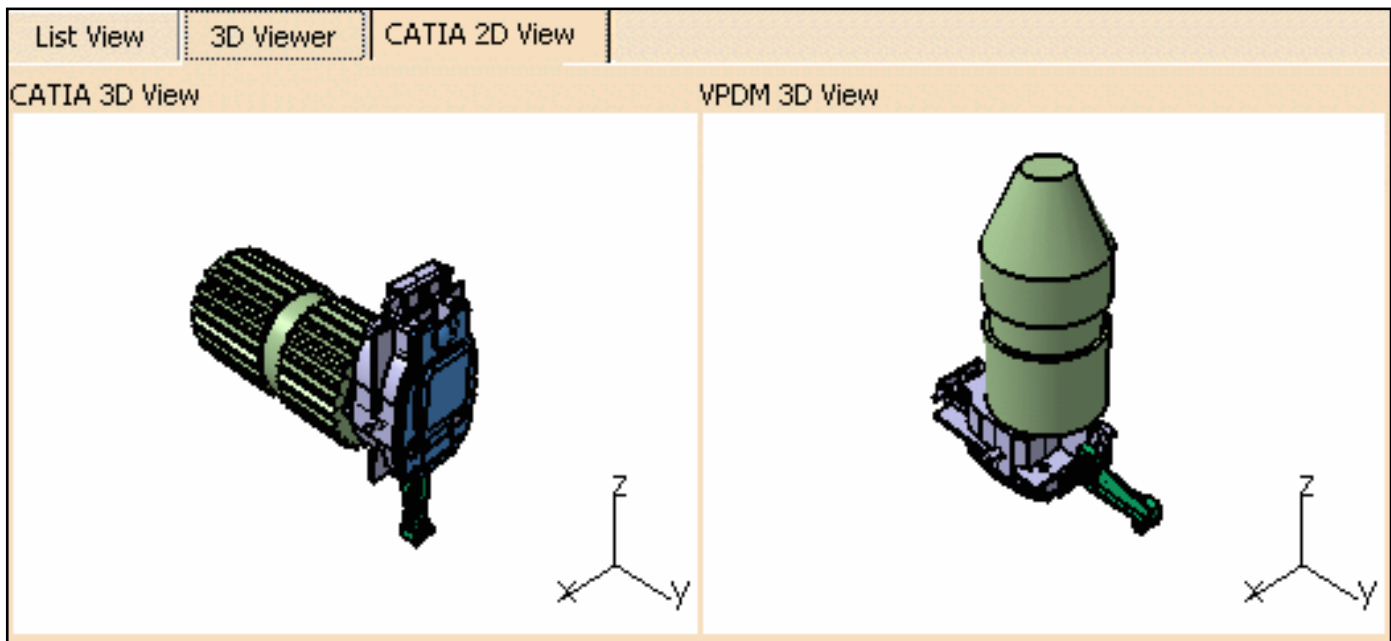

The **3D Viewer** tab enables you to visually compare the object loaded in the CATIA session and the one stored in SmarTeam. For more information, see [Using the Viewers](#).

CATIA 2D View Tab

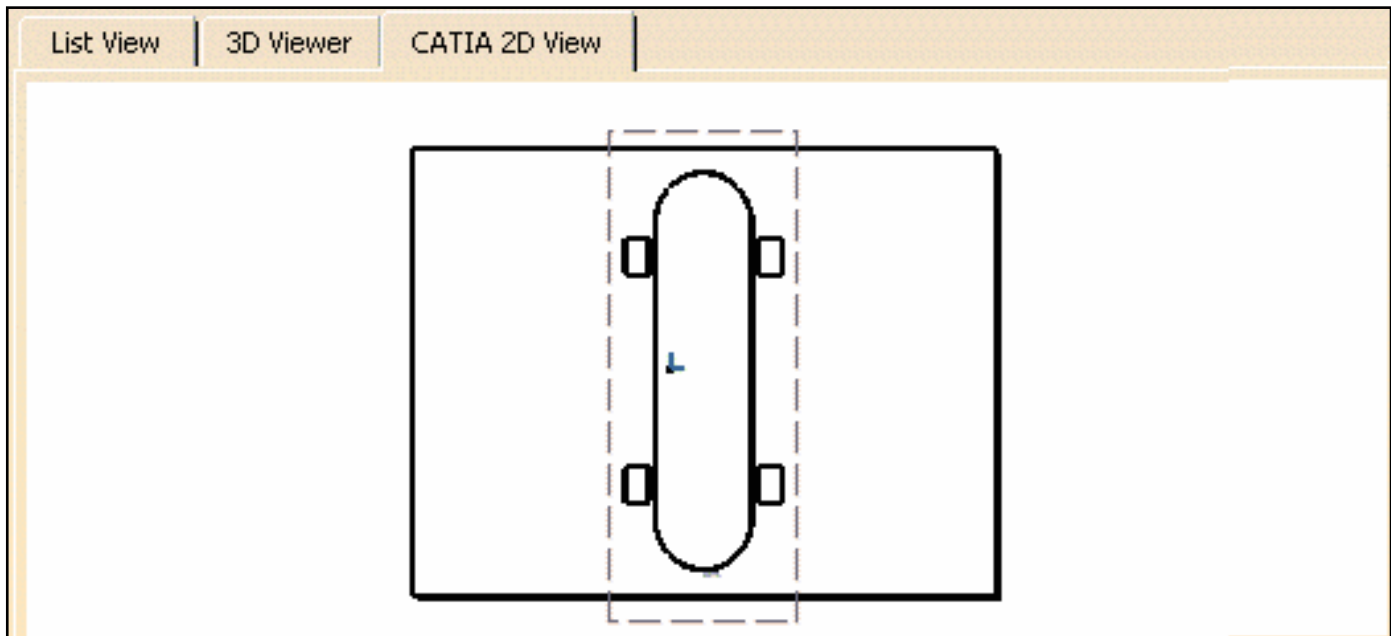


A **CATIA 2D View** tab is now displayed in the lower part of the **Reconciliator** window. It previews CATIA CATDrawing documents. You can improve the view of the active sheet inside this CATDrawing document using zoom in and zoom out capabilities.


Customizing


This section discusses the different ways of customizing your environment.

- [Customizing your Environment](#)
- [Customizing Reconciliator Queries](#)
- [Customizing Easy Queries](#)
- [Customizing Query Results Display](#)
- [Customizing Report Layouts](#)
- [Creating a Link for Tracking Documents with New Identifiers](#)
- [Customizing Pre-V5R18 Databases to use Automatic Pre-selection](#)
- [Customizing your Environment for Reconciling ENOVIA Data](#)

Customizing your Environment


 Before you start your first working session, you can customize the way you work to suit your habits.
This type of customization is stored in permanent setting files: these settings will not be lost if you end your session.

-  1. Select **Tools > Options**.
The **Options** dialog box is displayed.
2. Choose the **Infrastructure > Product Structure** category in the left-hand box.
The options for Product Structure settings appear, organized in tab pages.



3. Click the **Reconciliation** tab.

Environment

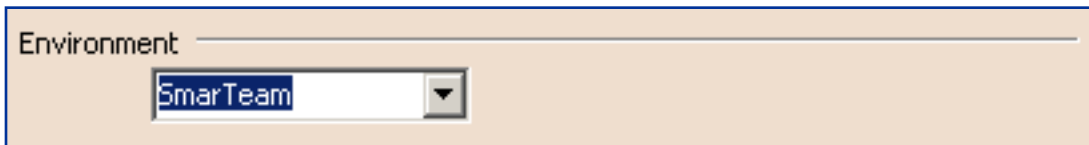


Enables you to select your working environment.


- **ENOVIA VPM V4**: sets ENOVIA VPM V4 as your default working environment.
- **ENOVIA V5 VPM**: sets ENOVIA V5 VPM as your default working environment.
- **SmarTeam**: sets SmarTeam as your default working environment.

 By default, this option is set to SmarTeam. If you do not set SmarTeam as the active option, the **Reconcile Window** looks different depending on

whether you click  or select **SmarTeam > Collaboration > Launch**

Reconciliation to launch the application. By clicking , the **Reconcile Window** that is displayed, provides options for working in a VPM environment.

Authorized rules for publications exposed mode

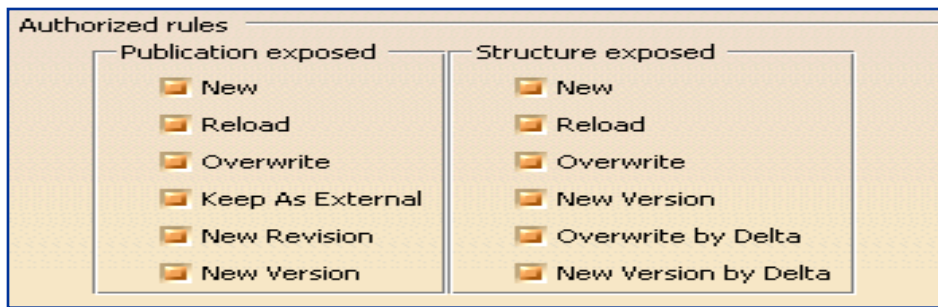

Options available in this tab let you define the Reconciliation rules you want to make available in your Reconciliation session.

- **New:** you can save new objects in the SmarTeam.
- **Load:** you can reload objects from the SmarTeam..
- **Overwrite:** you can overwrite the objects stored in SmarTeam by those loaded in session.
- **Keep External:** The broken link will be accepted as "broken" during the reconciliation phase.

 By default, all options are enabled.



Customizing Reconciliator Queries

Integration Rules Setup Custom Queries

Integration Rules Setup




This task shows you how to customize query operations. Customizing queries consists of choosing the query criteria which best meet your needs.

The procedure described here applies to both query types, that is to **queries by latest revisions only** and to **interactive queries**. This means that once you have followed the steps as explained here, both query types are affected by your customization.

For reference information about queries, see [Identifying SmarTeam Documents](#).




1. Launch the **Integration Tools Setup** utility as explained in the SmarTeam documentation.
2. From the **Integration Tool Setup** window, expand the **CATIA** category.
3. In the **CATIA** category, right-click **Mapping Group Types** and select **Add mapping group type**. The **Mapping Group Type** dialog box is displayed.
4. Enter **Reconciliator Query** in the **Name** field of the **Mapping Group Type** dialog box.

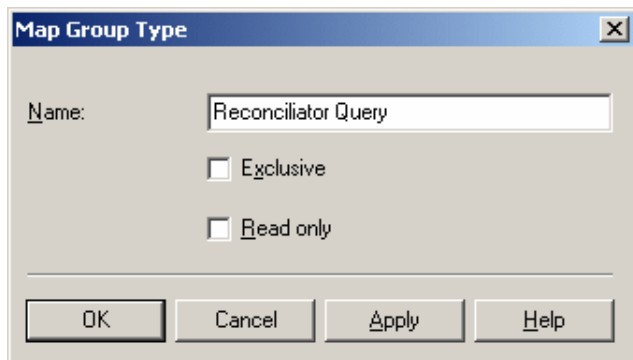


The **Map Group Type** dialog box is shown. It has a title bar with a close button. Inside, there is a **Name:** text box containing "Reconciliator Query". Below it are two checkboxes: **Exclusive** and **Read only**, both of which are unchecked. At the bottom are four buttons: **OK**, **Cancel**, **Apply**, and **Help**.

5. Click **OK** to confirm.

The new group type **Reconciliator Query** is now displayed in the **Mapping Group Types** list.

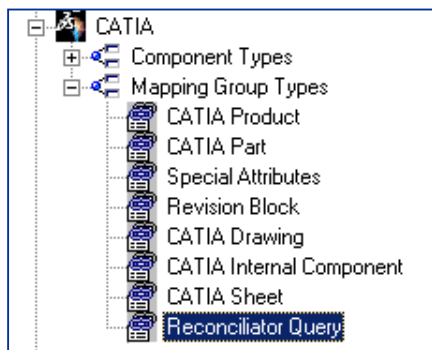


6. Right-click **Reconciliator Query** and select **Open groups tree**. The **Mapping Groups Tree** dialog box is displayed.
7. Right-click **Reconciliator Query** and select **Add**.
8. Enter **Generic Query** in the **Name** field of the **Manage group attribute** dialog box that appears.

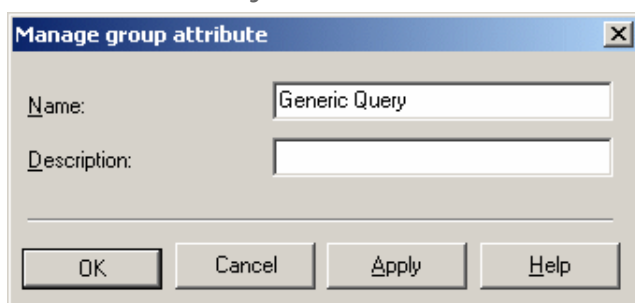

The **Manage group attribute** dialog box is shown. It has a title bar with a close button. Inside, there is a **Name:** text box containing "Generic Query". Below it is a **Description:** text box which is empty. At the bottom are four buttons: **OK**, **Cancel**, **Apply**, and **Help**.

9. Click **OK** to confirm.

The **Mapping Groups Tree** dialog box looks like this:

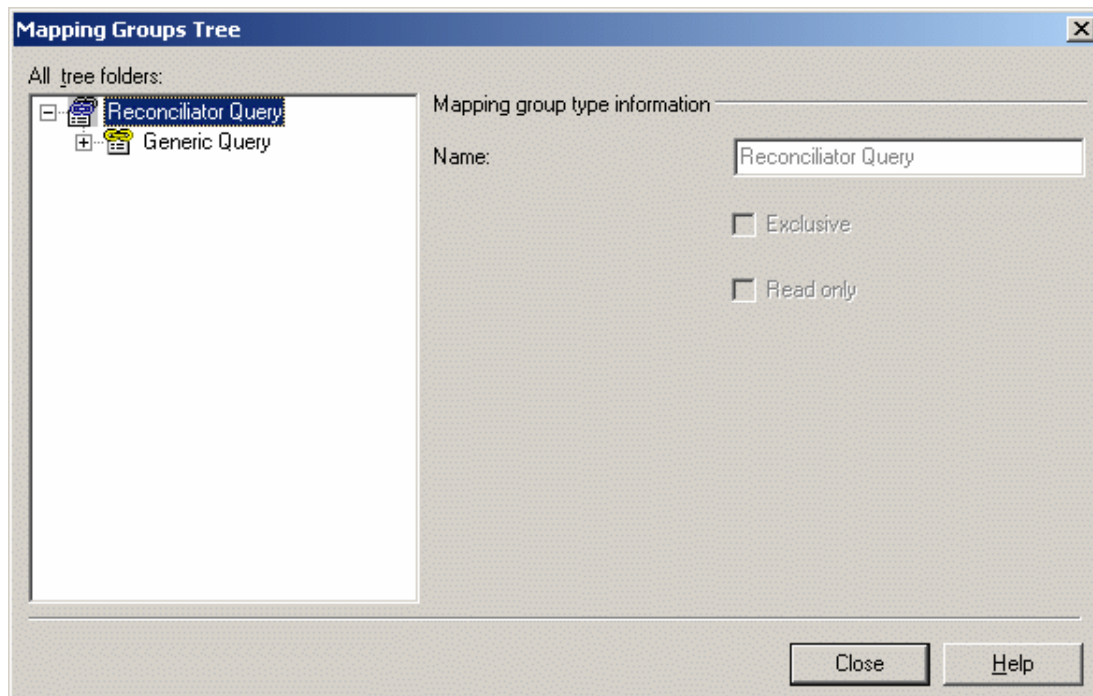


10. Right-click **Generic Query** and select **Add**.

The **Attribute properties** dialog box is displayed.

11. In this dialog box, you need to enter property names as they appear in CATIA. See [Properties and Related Attributes](#) for the complete list of all properties which can be added.

For the purposes of our example, enter **CN_REC_FILE_NAME** as property name in the **Name** field.

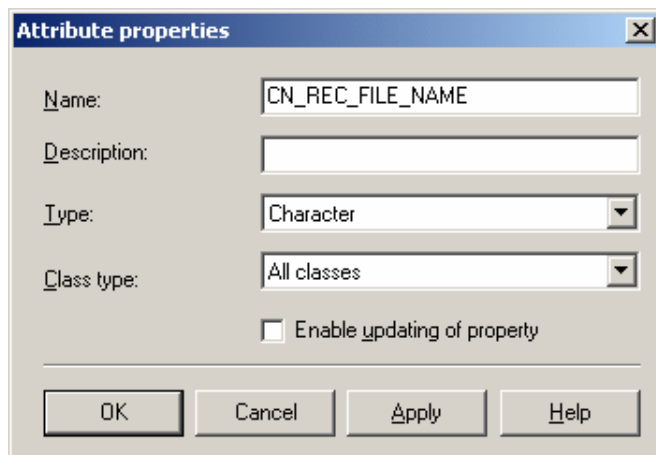


Note


If you select **Enable updating of property**, the application automatically provides default values for properties. We recommend you activate this option if the OEM or supplier exchanges CATIA files with the same file name as the ones in SmarTeam. Conversely, this option should be disabled when exchanging CATIA data with an ENOVIA OEM (file name is not stable in ENOVIA revision mechanism).


12. Click **OK** to confirm.

CN_REC_FILE_NAME is now displayed in the **Reconciliator Query** tree of the **Mapping Groups Tree** dialog box.

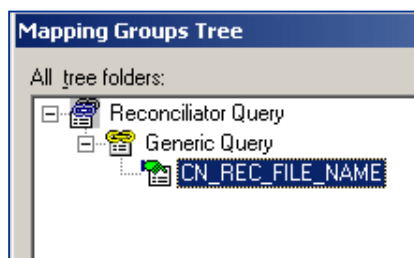



13. Right-click **CN_REC_FILE_NAME** and select **Add**.

14. In the **Attribute mapping** dialog box that is displayed, click  to the right of the **Class name** field to access the list of classes which are available for the **CN_REC_FILE_NAME** property.
15. From the **Class Tree** dialog box which appears, select **Documents** as the class you want.

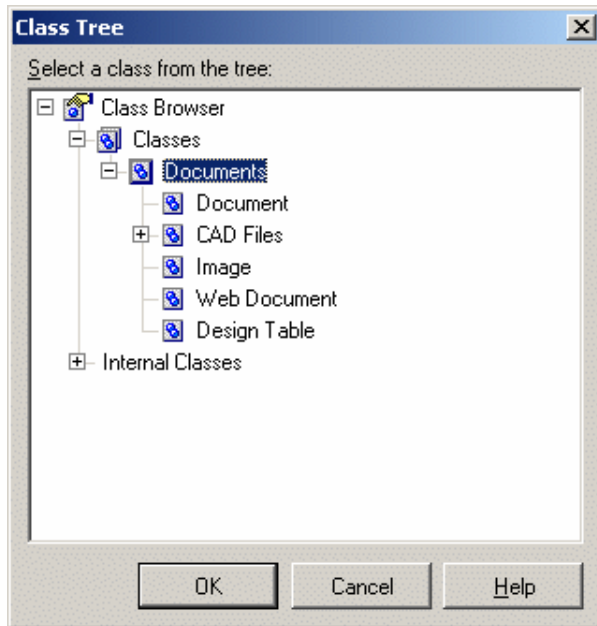


16. Click **OK** to confirm.
The **Attribute mapping** dialog box now looks like this:

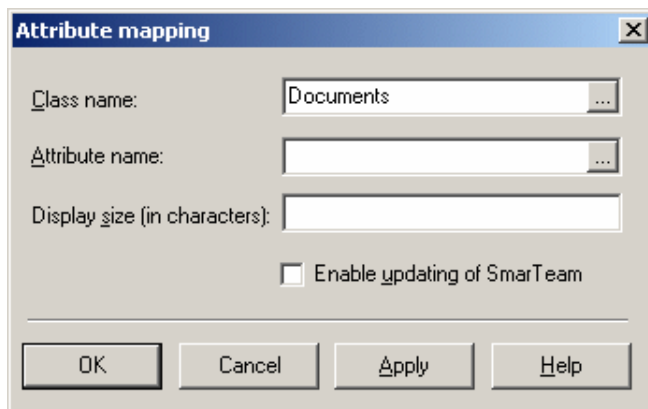


17. From the **Attribute mapping** dialog box, click  to the right of the **Attribute name** field to access the list of attributes which are available for the **CN_REC_FILE_NAME** property.
18. From the **Select Attribute** dialog box which appears, select **Application Reference File Name** as the attribute you want to assign.

Note that you need to select **Application Reference File Name**, not **File Name**.

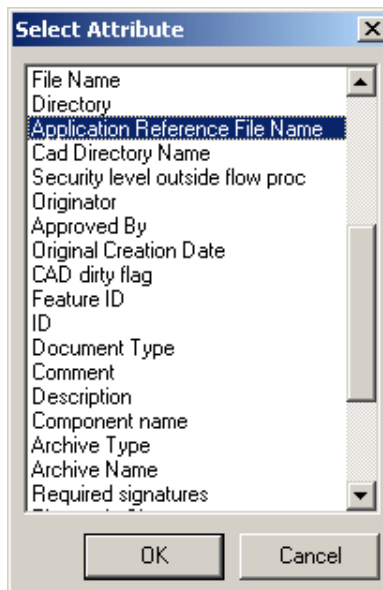


19. Click **OK** to confirm.
The **Attribute mapping** dialog box now displays **Application Reference File Name** in the **Attribute name** field.
20. Click **OK** to confirm and close this dialog box.
The **Reconciliator Query** list now looks like this in the **Mapping Groups Tree** dialog box:

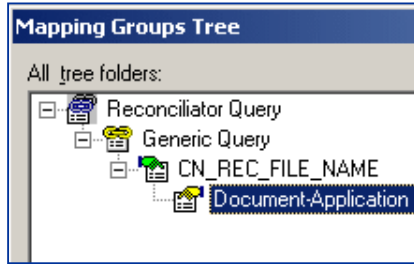

21. Click **OK** to confirm your customization and close the **Mapping Groups Tree** dialog box.
22. Click **Close** to close the **Integration Tools Setup** utility.

Both query types you can perform in the **Reconcile Window** are affected by your customization. Launching an [interactive query](#) reflects that **CN_REC_FILE_NAME** is the only property which you have defined in this scenario.

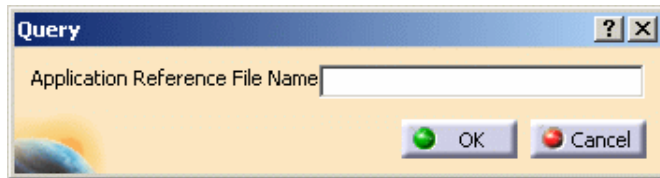


Properties and Related Attributes

The table below provides a list of all the properties and related attributes which you can set for customizing queries:

Property Name in CATIA	Attribute class in SmarTeam	Attribute Name in SmarTeam database	Attribute Display Name in SmarTeam	Mapping Direction
CN_PART_NUMBER	Documents	CN_PART_NUMBER	Part Number	CATIA > Database
CN_DESCRIPTIONREF	Documents	TDM_DESCRIPTION	Description	CATIA > Database
CN_REC_DocumentID	Documents	TDM_ID	ID	None
CN_REC_FILE_NAME	Documents	CAD_REF_FILE_NAME	Application Reference File Name	CATIA > Database

Notes

- **CN_PART_NUMBER**
Check that the display size for the Part number is set to 255 characters at least.

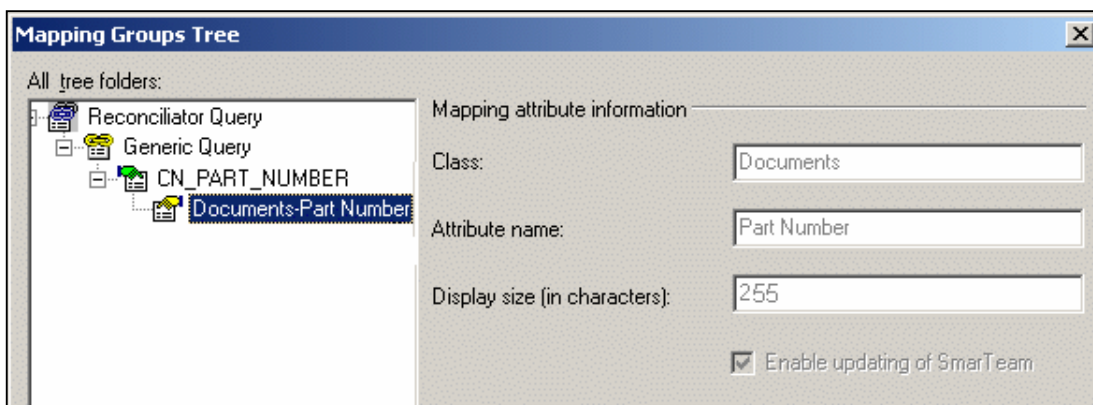

- **CN_REC_FILE_NAME**
We recommend you set this option to **NONE** when exchanging CATIA data with an ENOVIA OEM (file name is not stable in ENOVIA revision mechanism).

For reference information about the Integration Tools Setup Utility, see the SmarTeam documentation.



How to Define Custom Queries

All custom queries are added to a single xml file, **CATReconcileCustomize.xml**.

```
<?xml version="1.0" encoding="UTF-8"?>
<configuration classpath="c:\java\xslutil.jar;c:\java\V5JSysstem.jar;c:\java\xmltools.jar;c:\java\xmlapi.jar">
<criteriaList>
<criteria name="Test1" environment="TeamPDM" father="Interactive-Latest available revision"
order="1" In="c:\tmp\Test1_in.xml" Out="c:\tmp\Test1_out.xml" />
</criteriaList>
</configuration>
```


The environment variable **CATReconcilePath** specifies the path where the CATReconcileCustomize.xml file is located. The following command can be used to set your environment:

```
chcatenv -e $CATDefaultEnvironment -a user -var "CATReconcilePath=../ReconciliatorCustom
```

For more information on setting your environment please refer to the CATIA Installation and Deployment Guide> Customizing your Environment on Windows.



Queries are used to map objects loaded in CATIA to objects existing in the SmarTeam database. The SmarTeam reconciliator provides one query, **Latest available revision**, which can be launched without an interface or interactively. Custom queries can be defined based on any of the standard (base DS) queries. Custom queries can define the parameters that make up the query and/or supply default values for the query parameters. Only parameters defined in the [Integration Rules Setup](#) are available for custom queries. The following steps summarize how the custom query works:

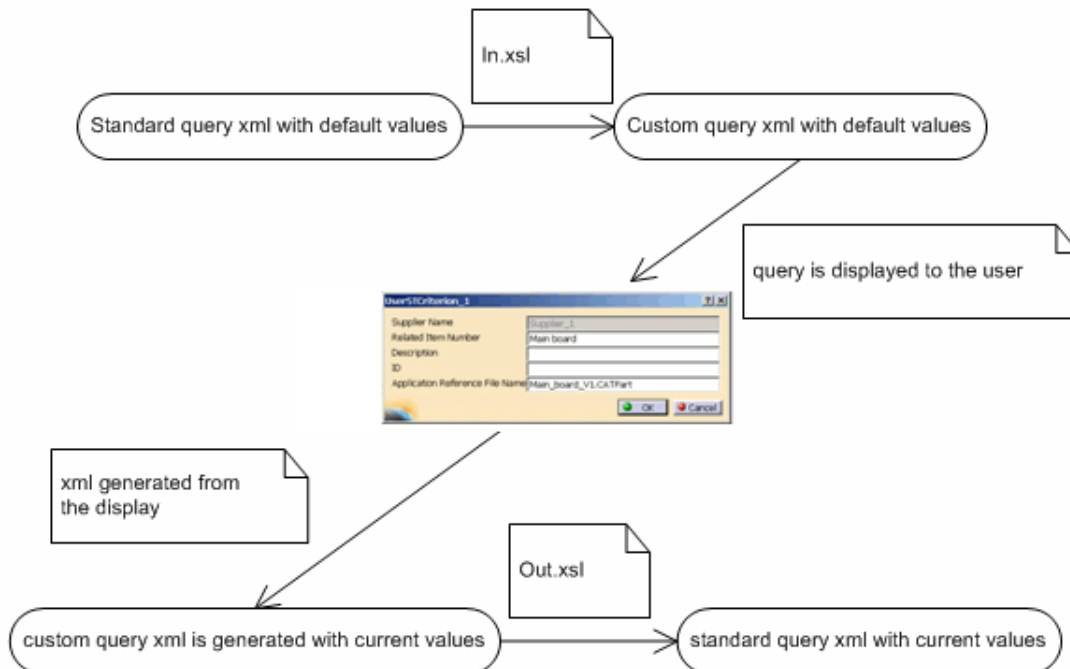

- The In.xml file converts the standard query xml to the custom query xml
- The query panel is displayed based on the parameters specified in the custom query xml.
- The user establishes their query criteria in the query panel and clicks the Ok button of the query panel.
- The custom query xml stream is generated by the system based on the query panel.
- The Out.xml file converts the custom query xml to the standard query xml which can be read by the system to return the desired query results.

To produce a custom query you will need to:

- Understand the [xml](#) for the standard query you want to customize.
- Create the [In xslt](#) file

- Create the [Out xslt](#) file
- [Define](#) the custom query name

In the CATReconcileCustomize.xml file, each custom query will define, at a minimum, the query name, the standard query on which it is based and the xslt (Extensible Stylesheet Language Transformations) files ([In/Out](#)).

Example of a Custom Query definition

This sample CATReconcileCustomize.xml file defines two custom queries: UserCriterion_1 and UserCriterion_2. Both are based on the **Interactive-Latest Available Revision** standard query. All specify the same In/Out xslt files: UserCriterionIn.xsl and UserCriterionOut.xsl.

```
<?xml version="1.0" encoding="UTF-8"?>

<configuration classpath="xslutil.jar;V5JSystem.jar;xslttools.jar;xmlapi.jar">
<criteriaList>
<criteria name="UserCriterion_1" environment="TEAMPDM" father="Interactive-Latest available
revision" order="1" In="c:\tmp\UserCriterionIn.xsl" Out="c:\tmp\UserCriterionOut.xsl"/>
<criteria name="UserCriterion_2" environment="TEAMPDM" father="Interactive-Latest available
revision" order="2" In="c:\tmp\UserCriterionIn.xsl" Out="c:\tmp\UserCriterionOut.xsl"/>
</criteriaList>
</configuration>
```

The following table details the structure of the query definition in the CATReconcileCustomize xml file:

XML Node	Attribute	Definition
configuration	classpath	Specifies the java \$CLASSPATH for the xslt conversion. The absolute path must be specified (or libraries should be local).
criteriaList		
criteria	name	The name of the custom query
	environment	VPDM environment applicable for this query. Setting this value will automatically set the correct VPDM when this query is chosen. Value for SmartTeam: TEAMPDM.
	father	Name of the query on which the custom query is based. Values for SmartTeam: Latest available revision, Interactive-Latest available revision
	order	Enables the criteria to be displayed in the specified order in the user interface.
	In	Name of the xslt file used to transform the standard (father) query's xml file into a new xml that describes the customized query. Only the transformed xml file can be used to display the query in the list of queries. The absolute path must be specified.
	Out	Name of the xslt file used after the user inputs their search criteria and executes the search. The Out xslt file is used to transform the customized query into one that can be used by the query. The absolute path must be specified.

How to Use a Custom Query in the Global Query/ Global Set

The custom queries you develop can be incorporated in the Global Query and/or Automatic Preselection Global Set by editing the xml that describes the parameters of this global set. To do this, modify the following file located in:

UNIX: <unload_dir>/<os>_a/reffiles/SuppChain

MS-Windows: <unload_dir>\<os>_a\reffiles\SuppChain

For Global Query: CATPDMAutoRulesValuator_GlobalQueryXMLForm_TeamPDM.xml

For Automatic Preselection: CATPDMAutoRulesValuator_AutoPreselectionXMLForm_TeamPDM.xml

Add a line for each custom query in the `queryName` section of the xml definition as follows (in this example, the custom query **UserCriterion_1** is added to the list of standard queries of Automatic Preselection Global Set):

```
<ParametersList>
<Parameter Name="queryName" Type="String"
Alias="%CATPDMReconcileAutoRules:queryName%" Mandatory="Yes">
<DefaultValuesList>
<DefaultValue>%STIPDMCriterion:STI.ByLastRevision%</DefaultValue>
<DefaultValue>UserCriterion_1</DefaultValue>
</DefaultValuesList>
<CurrentValue>%STIPDMCriterion:STI.ByLastRevision%</CurrentValue>
</Parameter>
...
</ParametersList>
```

Defining the In/Out XSLT Files

Each of the standard queries is defined by an xml file which describes all the available attributes for the query. When you are mapping objects in the reconciliator and you select a particular query the xml file defining all the attributes is used to create the query displayed.




To assist you in defining your own custom queries, the environment variable `REC_Display_CustomCriterion=1` can be set to display (in standard output) the xml for any query in the reconciliator.

The following table details the structure of the query xml file

XML Node	Attribute	Definition
Parameter List		Root of the xml document
Parameter	Name	Query parameter identifier
	Type	Attribute type (i.e. String)
	Alias	Query parameter display name
	Shown	Indicates if the query parameter is to be displayed. Values: Yes/No
	Mandatory	Indicates if the query parameter must be defined. Values: Yes/No
	Sensitive	Indicates if updating the query parameter will result in the check process. Values: Yes/No
	AccessMode	Indicates how the values can be accessed. Values: ReadWrite/ReadOnly
	Template	Values: Yes/No
	AccessMode	Indicates how the values can be accessed. Values: ReadWrite/Read
	Multi-valuated	Indicates if the query parameter allows multiple values. Values: Yes/No
	DefaultListExtensible	Indicates if the query parameter has authorized values (i.e. a drop-down list of possible values is shown). If yes then the DefaultValuesList is used to populate the the list of authorized values). Values: Yes/No
DefaultValuesList		Used to define a list of authorized values
DefaultValue		Authorized value for a parameter
CurrentValue		Current value for the parameter

To create a custom query, you will need to create two xslt files

- The **In xslt** file transforms the standard query xml into a new custom query xml. The new custom query xml file is used to display the custom query when it has been chosen by the user.
Example: The In xslt file [Test1_in.xsl](#), can be used to produce the following customized query, Test1

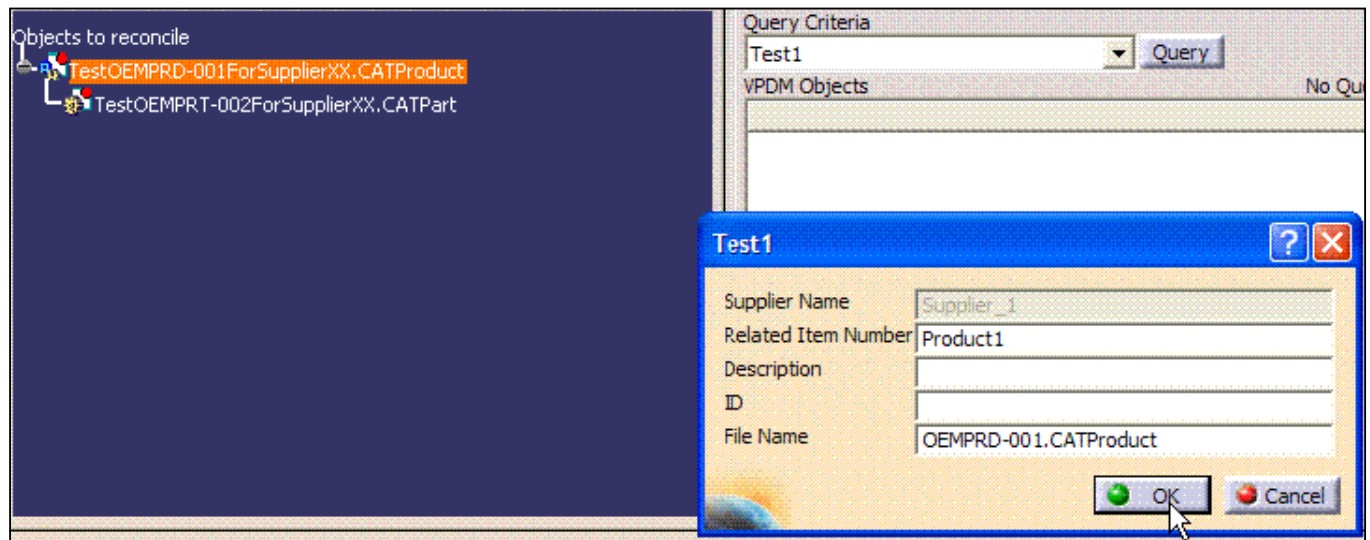

The standard query has been customized in the following ways:

- **Supplier Name** is a new read only field that contains the default value: Supplier_1.
- **File Name** has been modified by suppressing the four first characters and limiting the name to ten characters (in the example above TestOEMPRT-002ForSupplierXX.CATPart is modified by removing the first four characters ("Test") and then only taking the next ten characters (eliminating "ForSupplierXX").
- The **Out xslt** file is used (after the user inputs their criteria into the query dialog and applies the query) to transform the custom query xml into the xml file of the chosen standard query so it can be used by the system to retrieve the query results.
Example: The Out xslt file, [Test1_out.xsl](#), transforms the custom query back into the standard one which can be used by the sytem to execute the query.



Customizing Easy Queries

Integration Rules Setup

Integration Rules Setup




This task shows you how to customize easy query operations. Customizing queries consists of choosing the query criteria which best meet your needs.


For reference information about queries, see [Identifying SmarTeam Documents](#).




1. Launch the **Integration Tools Setup** utility as explained in the SmarTeam documentation.
2. From the **Integration Tool Setup** window, expand the **CATIA** category.
3. In the **CATIA** category, **Reconciliator Query** and **Reconciliator Query Results** Mapping Group Types are available.

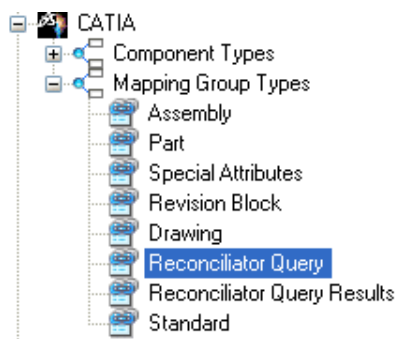

4. Right-click **Reconciliator Query** and select **Open groups tree**. The **Mapping Groups Tree** dialog box is displayed.
5. Right-click **Reconciliator Query** and select **Add**.
6. Enter **Easy Query** in the **Name** field of the **Manage group attribute** dialog box that appears.

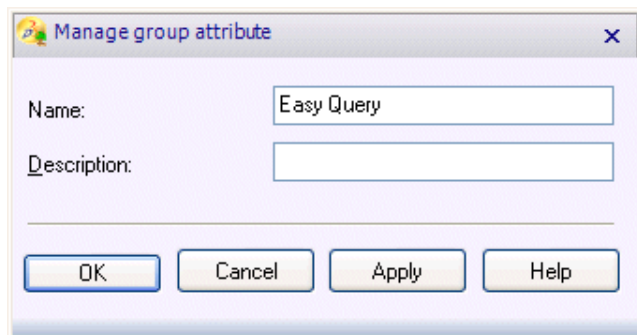


7. Click **OK** to confirm.
The **Mapping Groups Tree** dialog box appears:

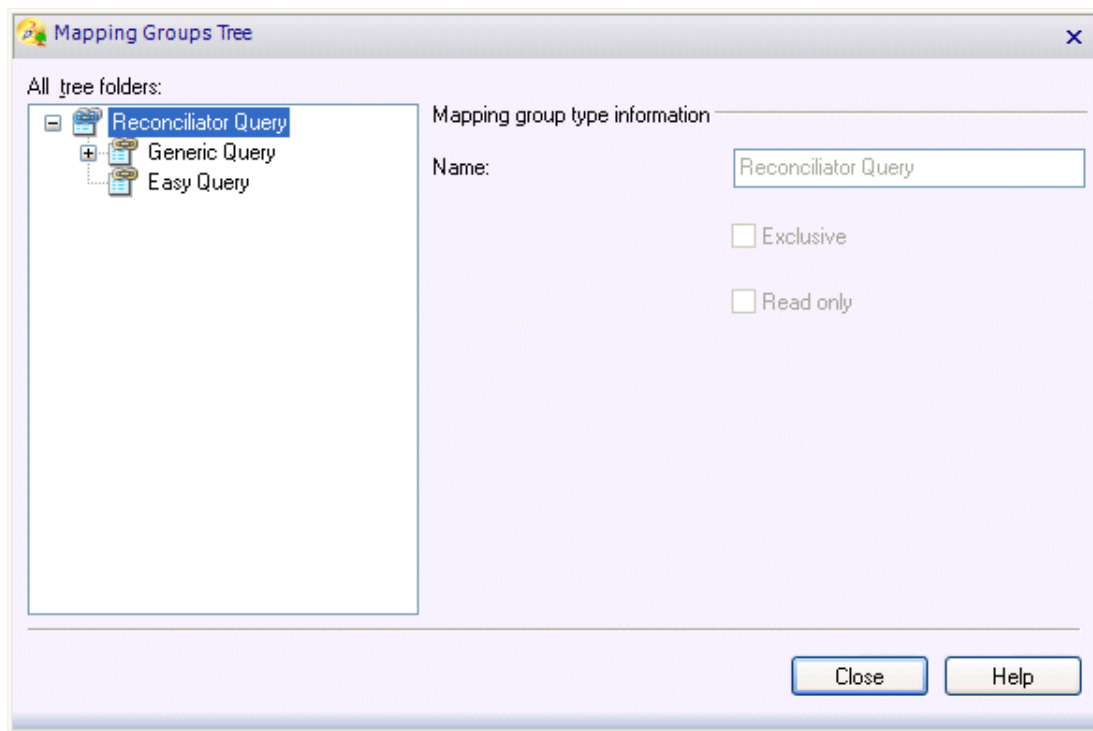


8. Right-click **Easy Query** and select **Add**.
The **Attribute properties** dialog box is displayed.
9. In this dialog box, you need to enter property names as they appear in CATIA. See [Properties and Related Attributes](#) for the complete list of all properties which can be added.


For the purposes of our example, enter **CN_REC_FILE_NAME** as property name in the **Name** field.

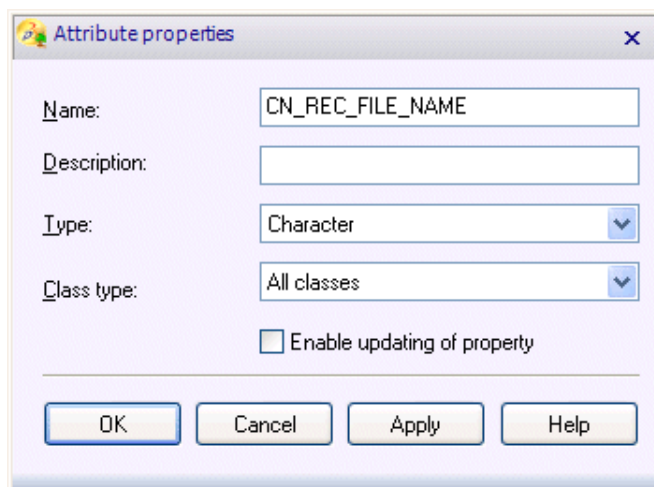


Note

If you select **Enable updating of property**, the application automatically provides default values for properties. We recommend you activate this option if the OEM or supplier exchanges CATIA files with the same file name as the ones in SmarTeam. Conversely, this option should be disabled when exchanging CATIA data with an ENOVIA OEM (file name is not stable in ENOVIA revision mechanism).


10. Click **OK** to confirm.
CN_REC_FILE_NAME is now displayed in the **Reconciliator Query** tree of the **Mapping Groups Tree** dialog box.
11. Right-click **CN_REC_FILE_NAME** and select **Add**.
12. In the **Attribute mapping** dialog box that is displayed, click  to the right of the **Class name** field to access the list of classes which are available for the **CN_REC_FILE_NAME** property.
13. From the **Class Tree** dialog box which appears, select **Documents** as the class you want.

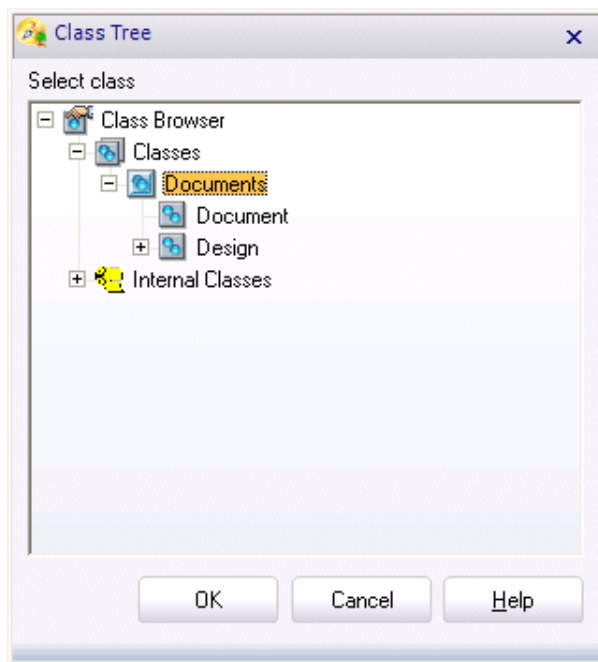


14. Click **OK** to confirm.

15. From the **Attribute mapping** dialog box, click  to the right of the **Attribute name** field to access the list of attributes which are available for the **CN_REC_FILE_NAME** property.
16. From the **Select Attribute** dialog box which appears, select **Application Reference File Name** as the attribute you want to assign.


Note that you need to select **Application Reference File Name**, not **File Name**.

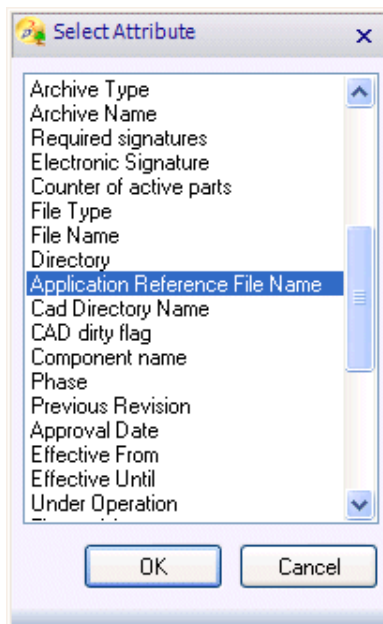

17. Click **OK** to confirm.
The **Attribute mapping** dialog box now displays **Application Reference File Name** in the **Attribute name** field.
18. Click **OK** to confirm and close this dialog box.
The **Reconciliator Query** list now looks like this in the **Mapping Groups Tree** dialog box:

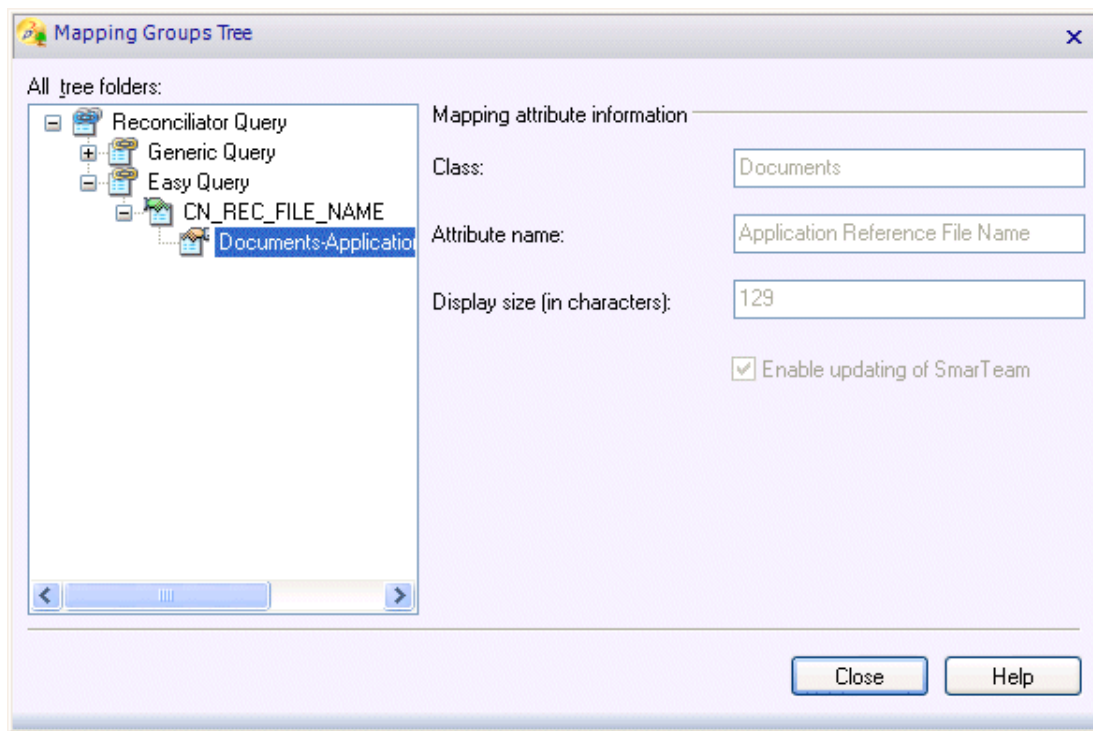

19. Click **OK** to confirm your customization and close the **Mapping Groups Tree** dialog box.
20. In the same way, you can customize the **Reconciliator Query Results**. If you do not customize the display, this will be based upon the properties set for the query as explained in previous steps. See [Properties and Related Attributes](#) for the complete list of all properties we suggest to add.

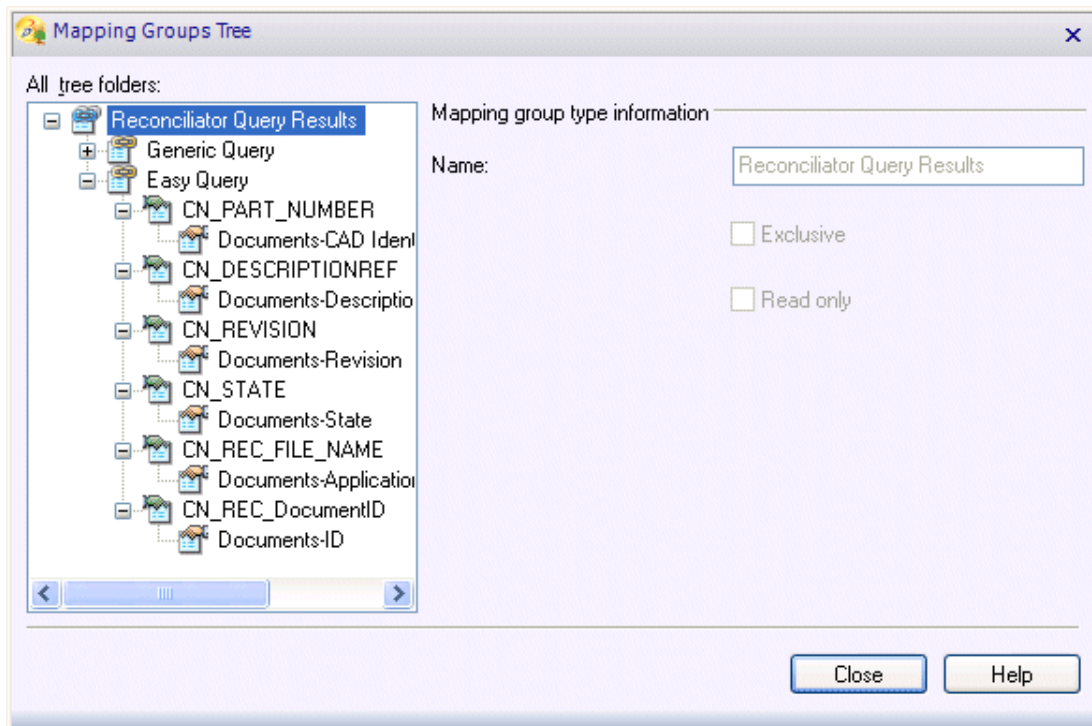

21. Click **Close** to close the **Integration Tools Setup** utility.

Properties and Related Attributes

The table below provides a list of all the properties and related attributes which you can set for customizing queries:

Property Name in CATIA	Attribute class in SmarTeam	Attribute Name in SmarTeam database	Attribute Display Name in SmarTeam	Mapping Direction
CN_PART_NUMBER	Documents	TDMX_CAD_IDENTIFIER	CAD Identifier	CATIA->Database
CN_DESCRIPTIONREF	Documents	TDM_DESCRIPTION	Description	CATIA->Database
CN_REC_DocumentID	Documents	TDMX_ID	ID	None
CN_REC_FILE_NAME	Documents	CAD_REF_FILE_NAME	Application Reference File Name	CATIA->Database


The table below provides a list of all the properties and related attributes which you can set for customizing the query result:

Property Name in CATIA	Attribute class in SmarTeam	Attribute Name in SmarTeam database	Attribute Display Name in SmarTeam	Mapping Direction
CN_DESCRIPTIONREF	Documents	TDM_DESCRIPTION	Description	Not applicable
CN_REC_DocumentID	Documents	TDMX_ID	ID	Not applicable
CN_REVISION	Documents	REVISION	Revision	Not applicable
CN_STATE	Documents	STATE	State	Not applicable
CN_PART_NUMBER	Documents	TDMX_CAD_IDENTIFIER	CAD Identifier	Not applicable
CN_REC_FILE_NAME	Documents	CAD_REF_FILE_NAME	Application Reference File Name	Not applicable

For reference information about the Integration Tools Setup Utility, see the SmarTeam documentation.




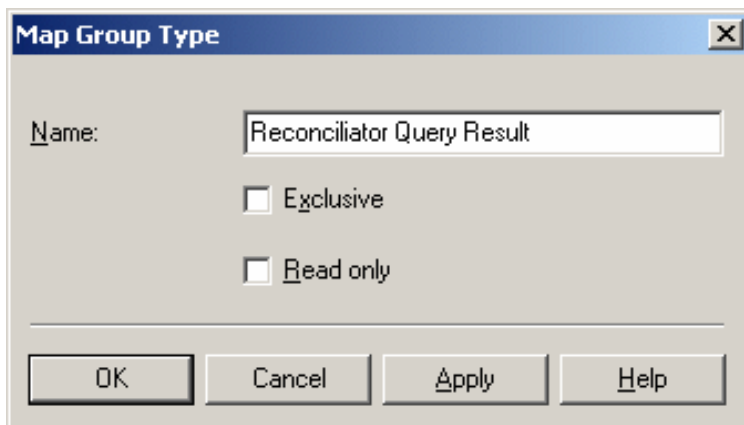
Customizing Query Results Display

 This task shows you how to customize the way query results are displayed in the **Reconcile Window**. Whatever query type you perform, the result obtained by following the procedure described here is the same for all queries.

Customizing query result display can be done at any time. Note that if you are using SmarTeam databases anterior to Version 5 Release 16 this operation is not mandatory prior to using the **Reconcile** capability for the first time. If you do not customize the display, this will be based upon the properties set for the query as explained in [Customizing Queries](#).


For reference information about queries, see [Identifying SmarTeam Documents](#).

-  1. Launch the **Integration Tools Setup** utility as explained in the SmarTeam documentation.
2. From the **Integration Tool Setup** window, expand the **CATIA** category.
3. In the **CATIA** category, right-click **Mapping Group Types** and select **Add mapping group type**.
The **Mapping Group Type** dialog box is displayed.
4. Enter **Reconciliator Query Result** in the **Name** field of the **Mapping Group Type** dialog box.
The **Reconciliator Query Result** mapping group type name is not mandatory: if it is not defined, the reconciliator will displayed the attribute listed in the **Reconciliator Query** mapping group.




5. Click **OK** to confirm.

The new group type **Reconciliator Query Result** is now displayed in the **Mapping Group Types** list.

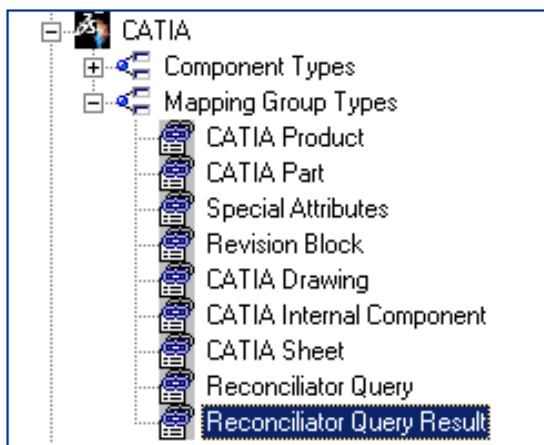


6. Right-click **Reconciliator Query Result** and select **Open groups tree**.
The **Mapping Groups Tree** dialog box is displayed.

7. Right-click **Reconciliator Query Result** and select **Add**.
8. Enter **Generic Query** in the **Name** field of the **Manage group attribute** dialog box that appears.

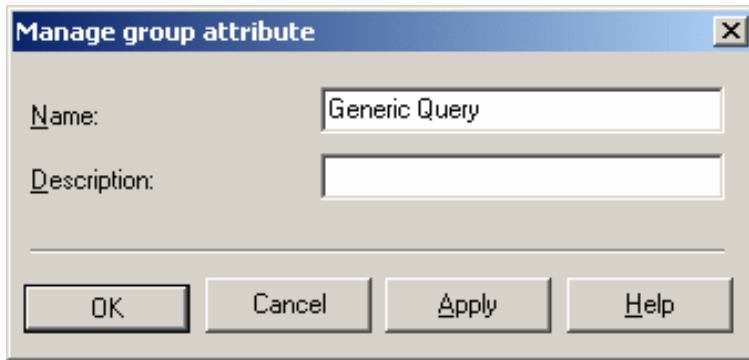


9. Click **OK** to confirm.

The **Mapping Groups Tree** dialog box looks like this:

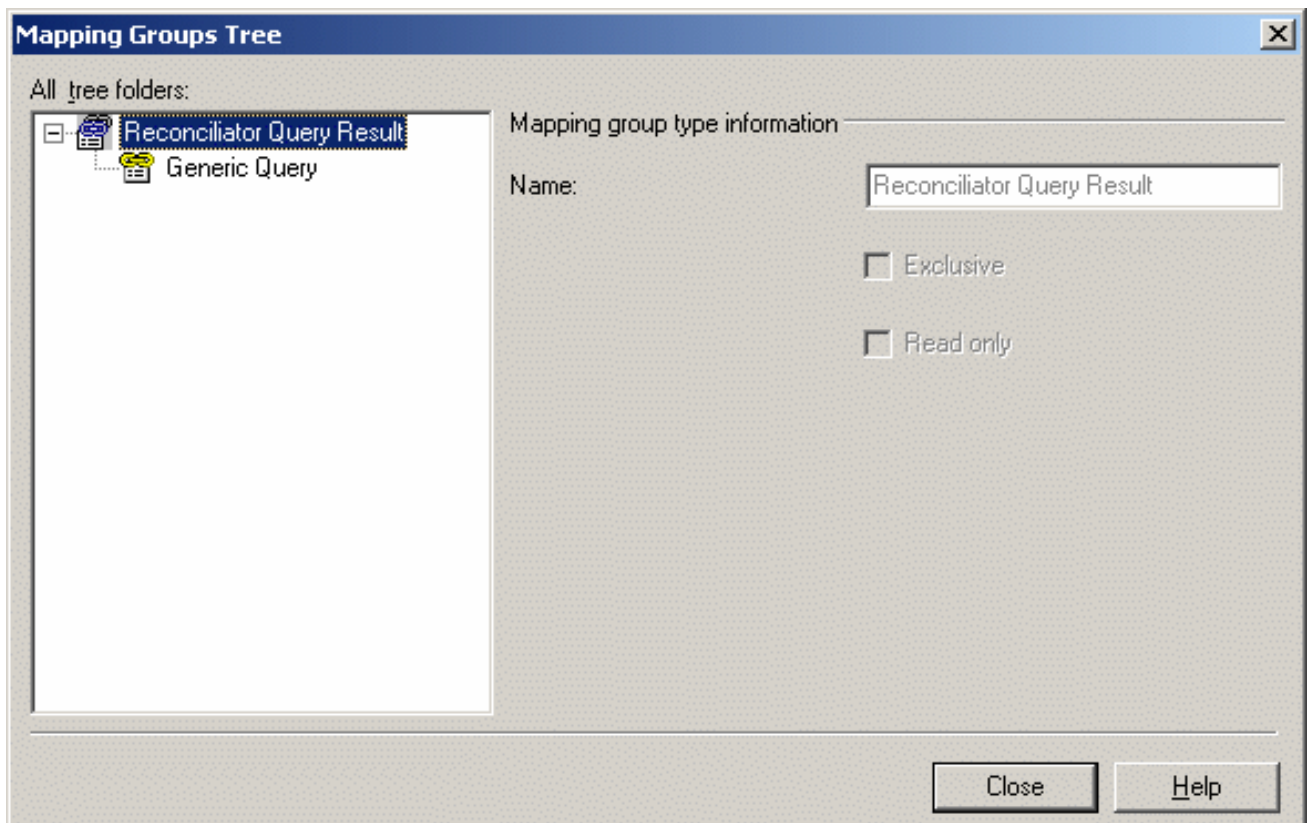



10. Right-click **Generic Query** and select **Add**.
The **Attribute properties** dialog box is displayed.
11. In this dialog box, you need to enter property names as they appear in CATIA. See [Properties and Related Attributes](#) for the complete list of all properties which can be added.
For the purposes of our example, enter **CN_REC_FILE_NAME** as property name in the **Name** field.

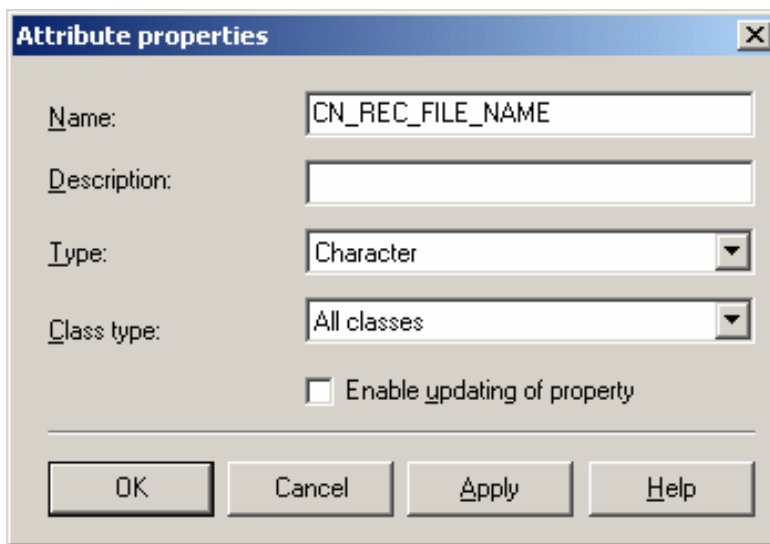


The 'Attribute properties' dialog box has a title bar with a close button. It contains four labeled text fields: 'Name' with the value 'CN_REC_FILE_NAME', 'Description' (empty), 'Type' with a dropdown menu showing 'Character', and 'Class type' with a dropdown menu showing 'All classes'. Below these fields is an unchecked checkbox labeled 'Enable updating of property'. At the bottom are four buttons: 'OK', 'Cancel', 'Apply', and 'Help'.

12. Click OK to confirm.
CN_REC_FILE_NAME is now displayed in the **Reconciliator Query** tree of the **Mapping Groups Tree** dialog box.

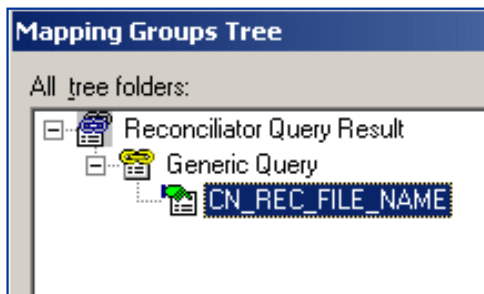



13. Right-click CN_REC_FILE_NAME and select **Add**.
14. In the **Attribute mapping** dialog box that is displayed, click  to the right of the **Class name** field to access the list of classes which are available for the CN_REC_FILE_NAME property.
15. From the **Class Tree** dialog box which appears, select **Documents** as the class you want. The mapping property should be mapped on the **Documents** class. The mapping property name is currently not taken into account. The mapping attribute name is the External name displayed in the query panel result.

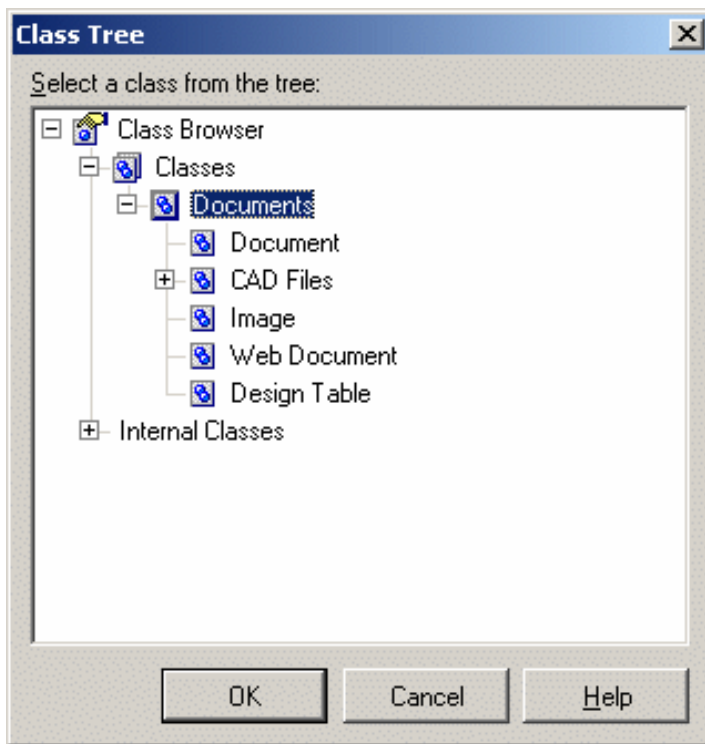


16. Click **OK** to confirm.

The **Attribute mapping** dialog box now looks like this:

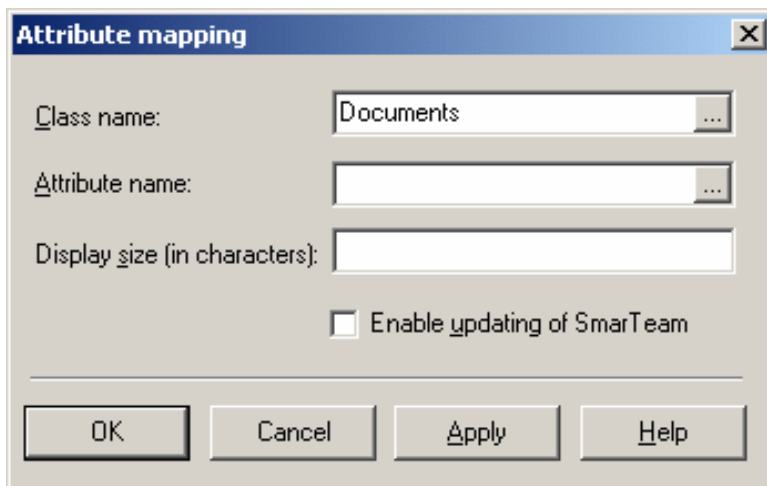


17. From the **Attribute mapping** dialog box, click  to the right of the **Attribute name** field to access the list of attributes which are available for the **CN_REC_FILE_NAME** property.
18. From the **Select Attribute** dialog box which appears, select **Application Reference File Name** as the attribute you want to assign.

Note that you need to select **Application Reference File Name**, not **File Name**.

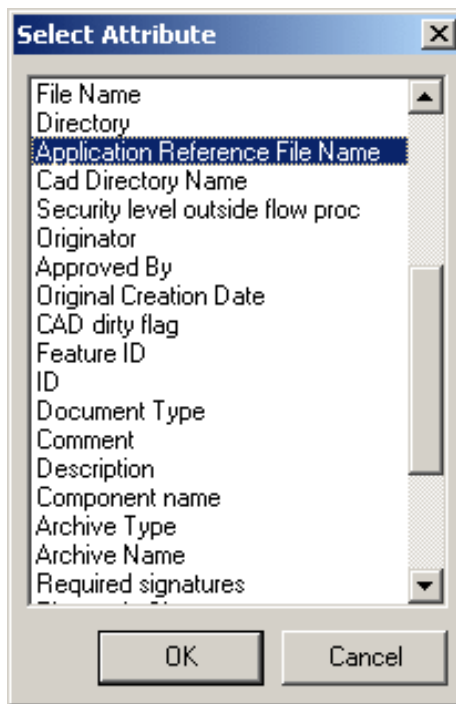


19. Click **OK** to confirm.
The **Attribute mapping** dialog box now displays **Application Reference File Name** in the **Attribute name** field.
20. Click **OK** to confirm and close this dialog box.
The **Reconciliator Query Result** list now looks like this in the **Mapping Groups Tree** dialog box:

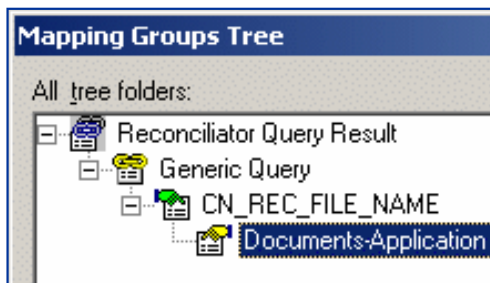

21. Click **OK** to confirm your customization and close the **Mapping Groups Tree** dialog box.
22. Click **Close** to close the **Integration Tools Setup** utility.

Whatever query type you perform, query results will appear like this in the **Reconcile Window**:

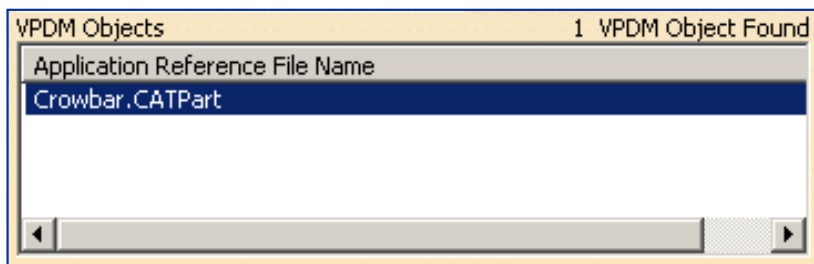

Properties and Related Attributes


The table below provides a list of all the properties and related attributes which you can set for customizing queries:


Property Name in CATIA	Attribute class in SmarTeam	Attribute Name in SmarTeam database	Attribute Display Name in SmarTeam	Mapping Direction
CN_DESCRIPTIONREF	Documents	TDM_DESCRIPTION	Description	Not applicable
CN_REC_DocumentID	Documents	TDM_ID	ID	Not applicable
CN_REVISION	Documents	REVISION	Revision	Not applicable
CN_STATE	Documents	STATE	State	Not applicable
CN_PART_NUMBER	Documents	CN_PART_NUMBER	Part Number	Not applicable
CN_REC_FILE_NAME	Documents	CN_REC_FILE_NAME	Application Reference File Name	Not applicable


For reference information about the SmarTeam Integration Tools Setup Utility, see the SmarTeam documentation.



Customizing Report Layouts

 To customize the layout of a reconciliation report, you need to define an xsl document. This task shows you how to do so. To know how to generate a report, see [Generating a Reconciliation Report](#).

-  1. Select **Tools > Options**.
The **Options** dialog box is displayed.
2. Select **Infrastructure > Product Structure** in the left column of the dialog box.
3. Click the **Reconciliation** tab.
4. In the **Output directory** field of the **Report Generation** area, enter the directory path to define the directory where the html file will be generated.
5. Enter the XSL file name in the **Input XSL** field.

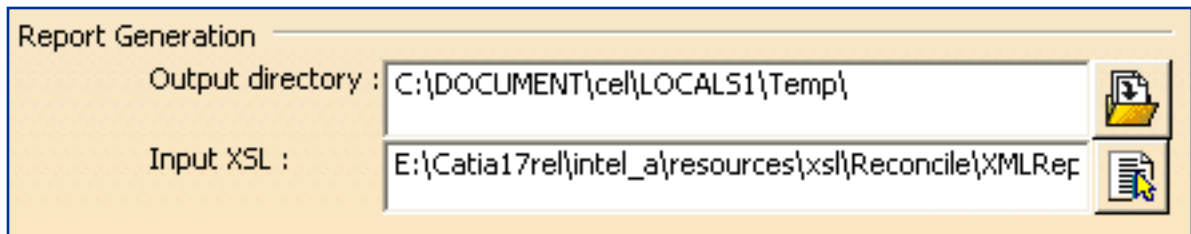

The screenshot shows the 'Report Generation' section of a dialog box. It contains two text input fields. The first field, labeled 'Output directory :', contains the text 'C:\DOCUMENT\cel\LOCALS1\Temp\'. To the right of this field is a folder icon. The second field, labeled 'Input XSL :', contains the text 'E:\Catia17rel\intel_a\resources\xsl\Reconcile\XMLRep'. To the right of this field is a document icon with a blue arrow pointing to it.

6. Click **OK** when done.



Creating a Link for Tracking Documents with New Identifiers


To implement the **NewFrom** rule mechanism and store the history link in the SmarTeam database, changes must be made in the SmarTeam Data Model Designer and then running the Integration Tool Setup as described in this section. Using this procedure, a new attribute named **CN_IS_NEWFROM** is created in the SmarTeam database.




1. Launch the **SmarTeam Data Model Designer** utility.
2. From the **File** menu, select **Modify Database Structure**.
3. Select your database.
4. Create the **IS_NEWFROM** attribute for the Documents super-class. Note that **CN_** is automatically added.
5. Modify the attribute definition as follows: Set the Attribute Type as Long Integer and the size as 4.
6. Save the changes in the database.
7. Launch the Integration Tool Setup utility.
8. Open the Special Attribute group tree.
9. Create an attribute property named **Is_NewFrom**. You must enter the exact name as indicated, use the corresponding uppercase or lowercase. The application checks this attribute property name and retrieves the database attribute name from it. That means that the attribute previously declared as **CN_IS_NEWFROM** could have a different name.
10. Add an attribute mapping by selecting the Documents class and the **IS_NEWFROM** attribute previously created in the SmarTeam Data Model Designer




Customizing Pre-V5R18 Databases to use Automatic Pre-selection


 This section provides mandatory operating instructions to system administrators who need to ensure that the automatic pre-selection mechanism works when using SmarTeam databases versions anterior to Version 5 Release 18.

This task shows you how to integrate a dedicated attribute in the SmarTeam database. For more information about automatic pre-selection, see [Automating Reconciliations Using the Automatic Pre-selection Command](#).


-  1. Launch the SmarTeam Data Model Designer tool.
2. From the File menu, select **Modify Database Structure**.
3. Select your database.
4. Create the `CAD_TIMESTAMP` new attribute for the **Documents** super class. Note that `CN_` is automatically added.

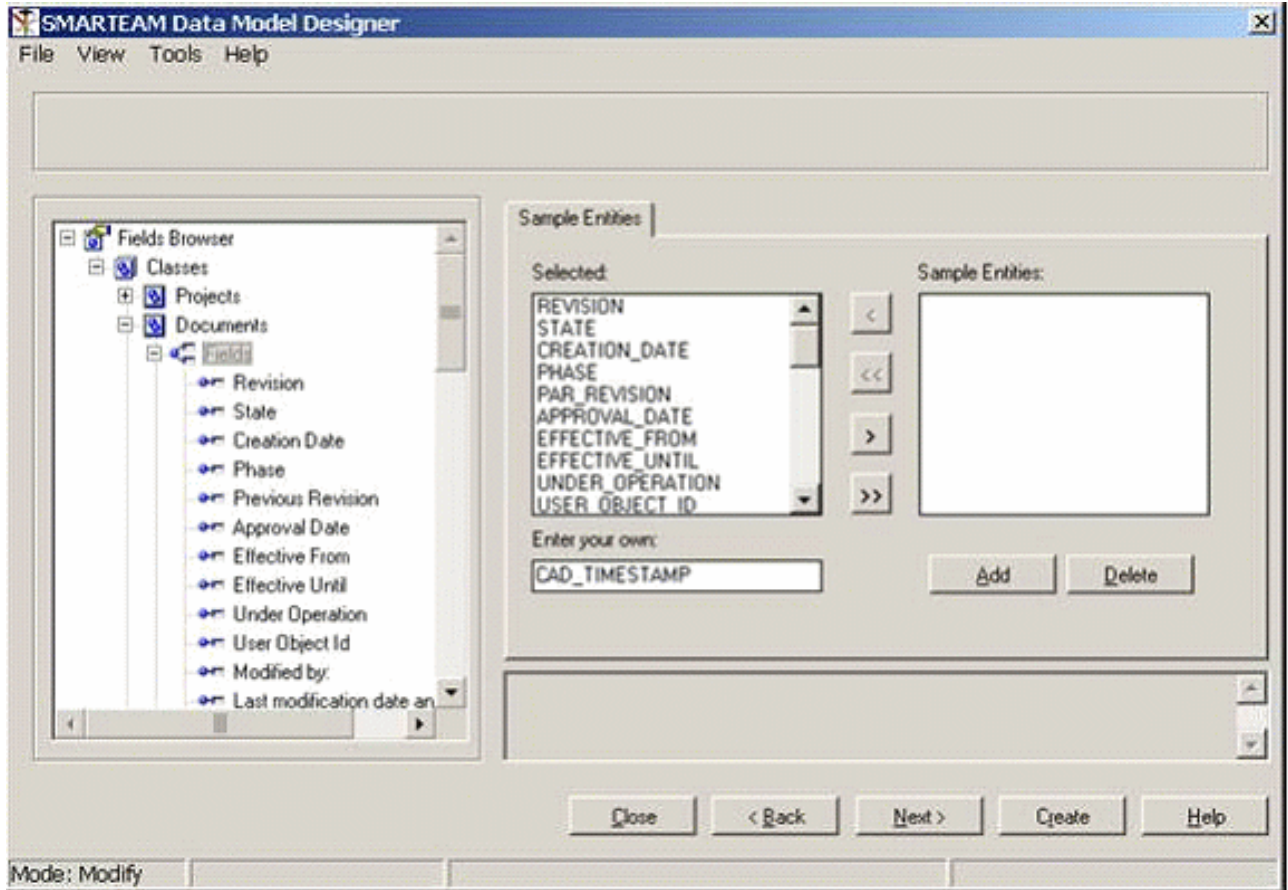


5. Modify the attribute definition as follows: set **Long Integer** as the attribute type and enter 4 as the size.

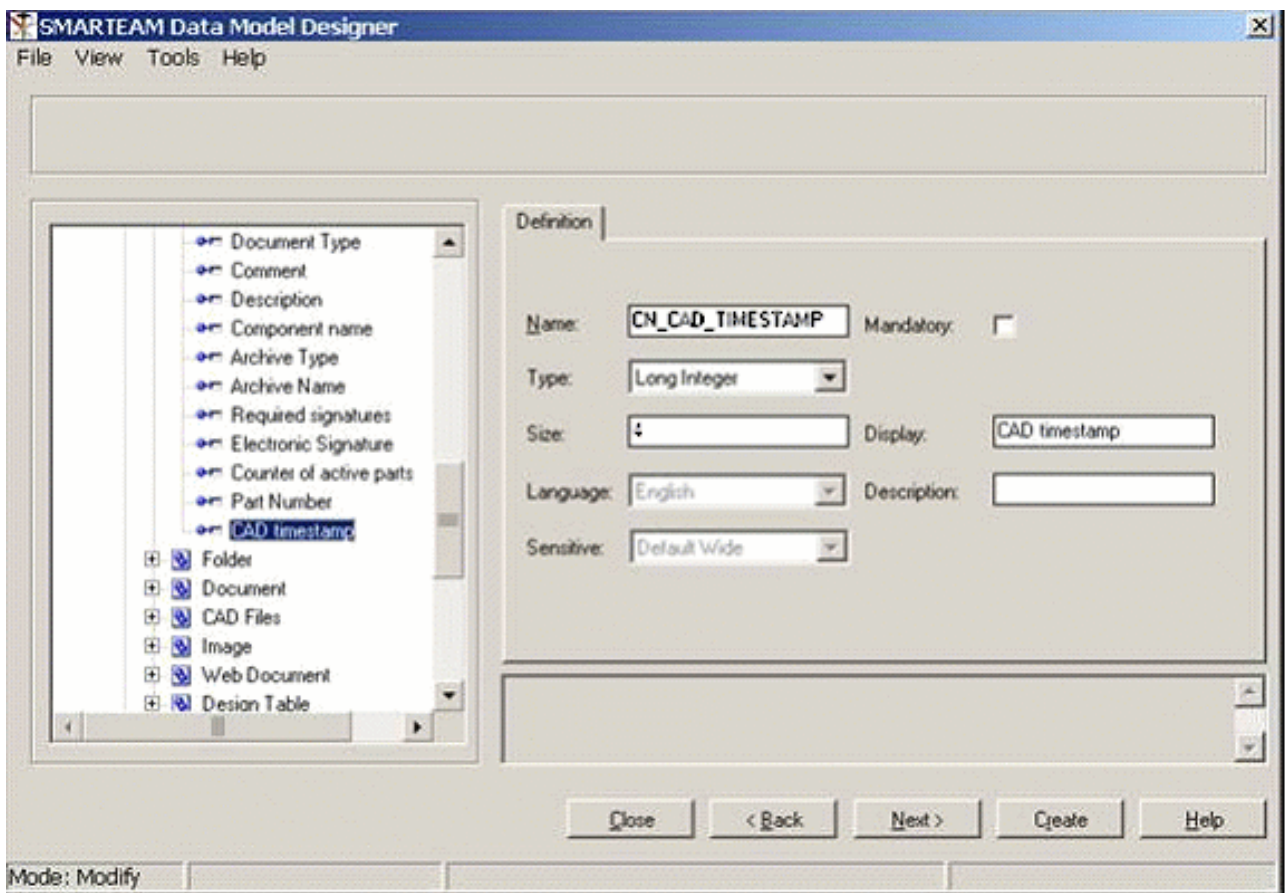


6. Save the modification in the database.
7. Launch the Integration Tools Setup utility.
8. Open the Special Attribute group tree.

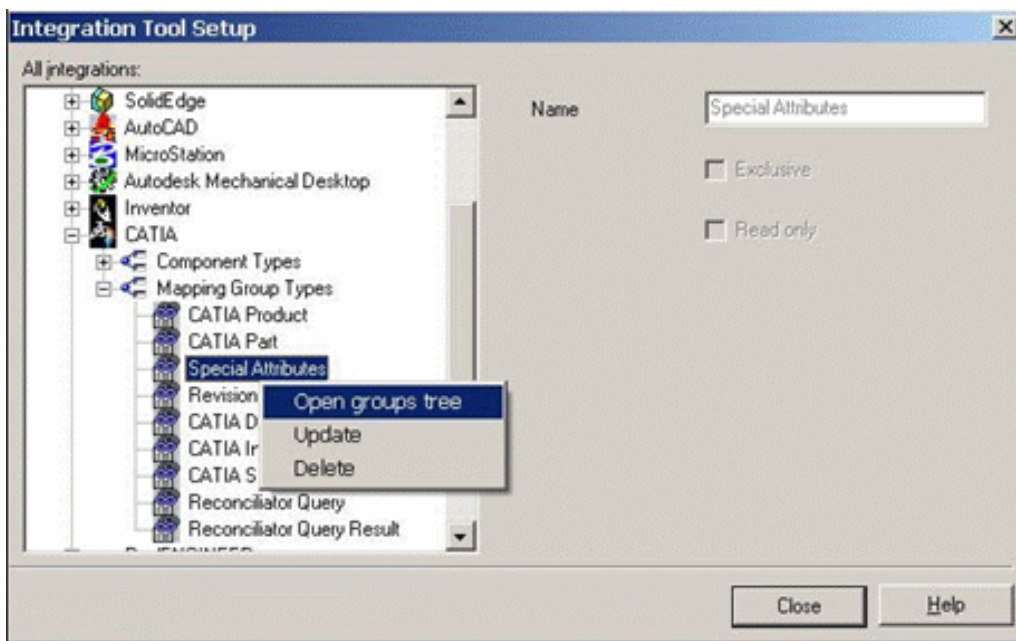

9. Create an attribute property named **CAD TimeStamp**.
You must enter the exact name: as indicated, use one blank character and upper/lower cases. The application only checks this attribute property name and retrieves the database attribute name from it.

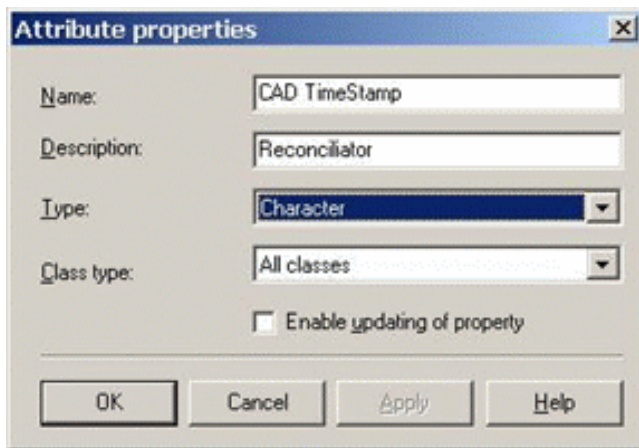

10. Add an attribute mapping by selecting the Documents class and the CAD_TIMESTAMP attribute previously created in SmarTeam Data Model Designer.

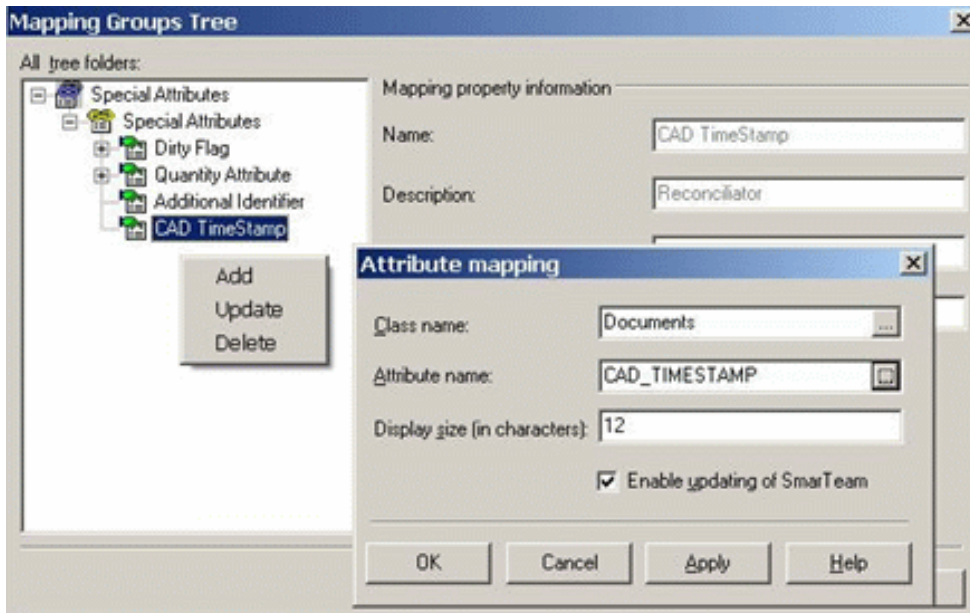


For reference information about SmarTeam Data Model Designer, see the *SmarTeam-Editor documentation*.



Customizing your Environment for Reconciling ENOVIA Data

Before you starting working with ENOVIA data, you must customize your environment as explained below:

- 
- From V5R18 onwards, the CATIA_TEAM_PDM_SUPPLIER_EV5 environment variable is no longer required
1. Launch the **SmarTeam Integration Tools Setup** utility.
 2. Remove the File Name query criterion because this information is not stable. "Publication Exposed" documents coming from ENOVIA have a file name convention which includes the ENOVIA revision information. For more information about customization, see [Customizing Queries](#).



Methodology

In the industry, since early design, manufacturers (OEMs) need to exchange data with their suppliers. Sometimes, for different possible reasons, suppliers send incomplete design while manufacturers (OEMs) choose not to expose all of their documents.

This section discusses how data can be exchanged so that Intellectual Property (I.P.) protection is ensured. It explains how subsets of data can be sent as well as how incomplete design can be reintegrated into the information system (SmarTeam).

Exporting Data

Internal Intellectual Property (I.P.) Protection - Integrating Subsets of Data


Exchanging Modified Documents Only


Reconciling ENOVIA Data with SmarTeam Documents


Reconciling ENOVIA Data Saved in Structured Exposed Mode


Reconciling an Assembly Containing a Contextual Part

Exporting Data

 In case you want to protect your data and therefore prefer to send a subset of it to the supplier or OEM, CATIA lets you specifically select the number of documents to be sent. This section lists the steps to perform, to achieve this.

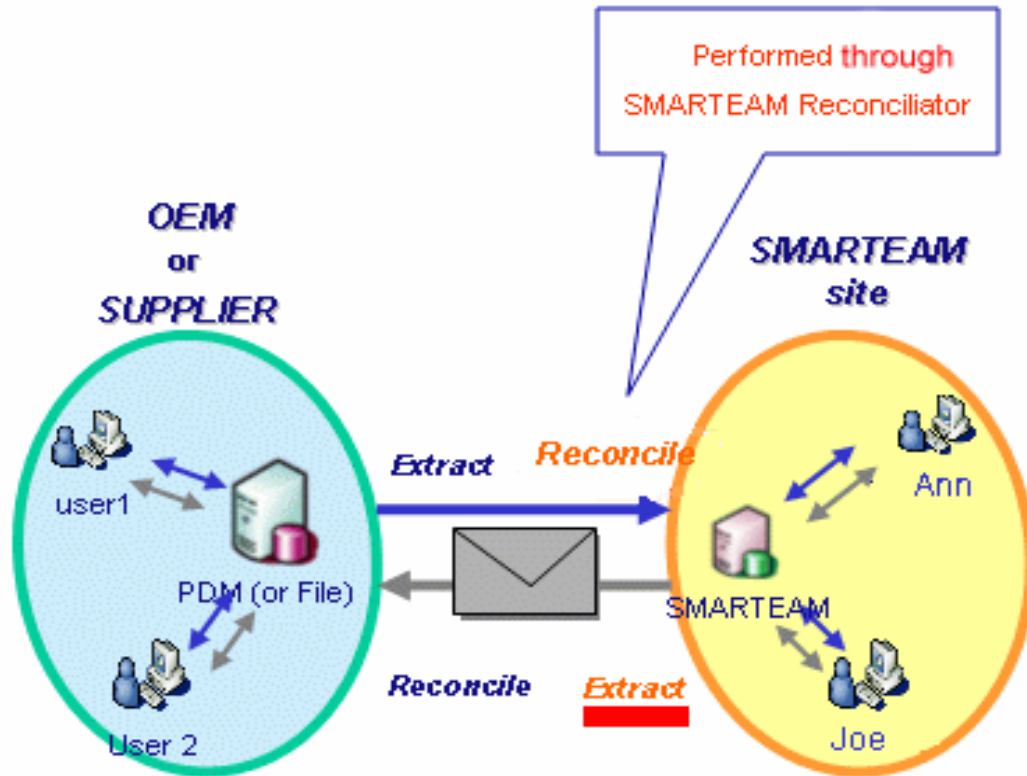

- 
1. Launch CATIA to open your documents.
 2. Use the CATIA **Search** or **File Open** capabilities to open the data you want to extract.
 3. When done, select **File>Send To >Directory**.
 4. Click the **Open** button to open the **Send To Directory** dialog box.
 5. Sort out the documents you want to copy: use the icons to move the files to the **Will be Copied** section.
 6. Select a dedicated temporary directory on your local disk.

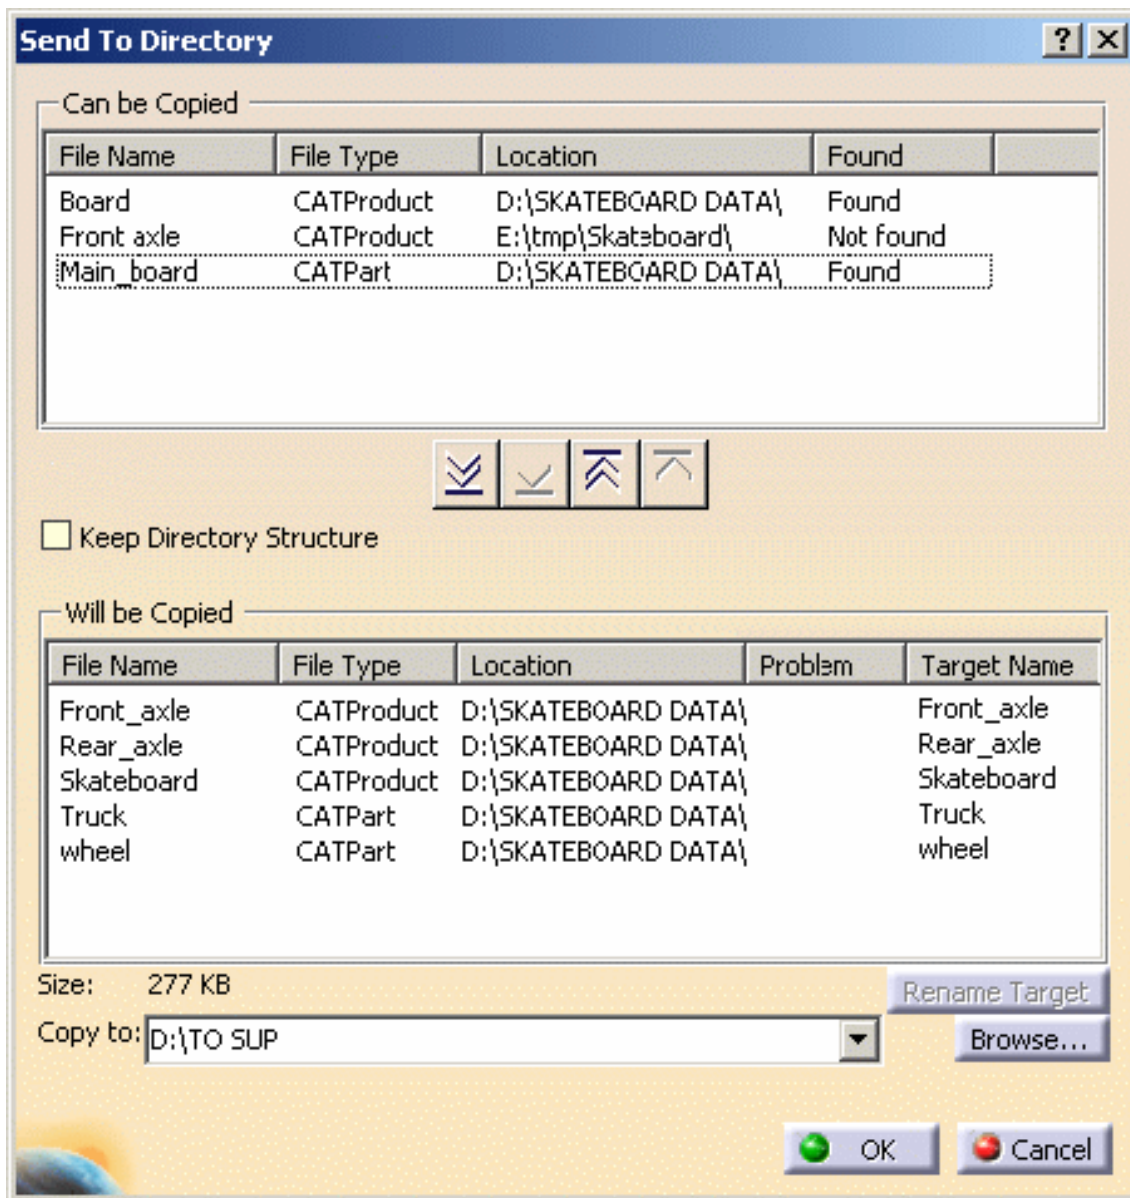

7. Confirm the copy of the documents you want to share with your supplier by clicking **OK**.
When the copy has been performed the **Files Copied** dialog box appears telling you the number, size and type of the files copied.
For details on how to use the **Send To >Directory**, see the CATIA Infrastructure User's Guide.
8. Optionally compress the data which is now ready for being sent to your supplier. Compressing data can help you ensure that you send all the data required.

Intellectual Property Protection


In case you want to protect your data and therefore prefer to send a subset of it to your supplier or OEM, the CATIA **Send To** capability lets you restrict the number of documents to send.

Note: To know how to re-integrate into SmarTeam subsets of data updated and sent by suppliers, see [Internal Intellectual Property \(I.P.\) Protection - Integrating Subsets of](#)


Data




Internal Intellectual Property (I.P.) Protection


 This section illustrates how suppliers and OEMs can exchange subsets of data while protecting their own data. In the following scenario we assume that you are a supplier to whom the OEM has sent a skateboard structure without the board data.


To know how to send subsets of data, see [Exporting Data](#).


-  1. Open the documents sent by the OEM.
As the board has not been sent, CATIA specification tree displays a broken link for the board document.

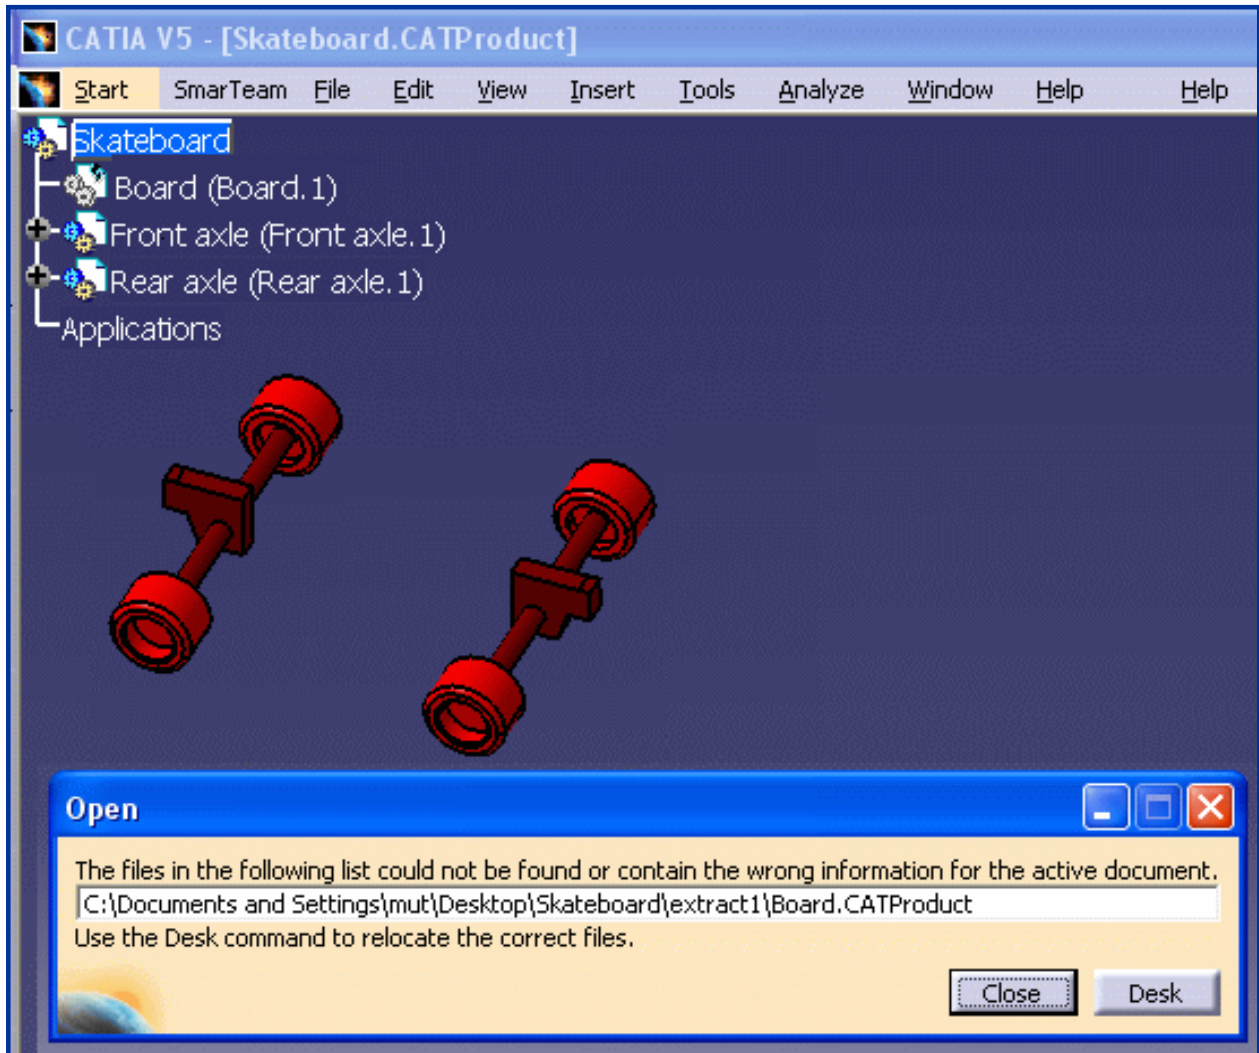

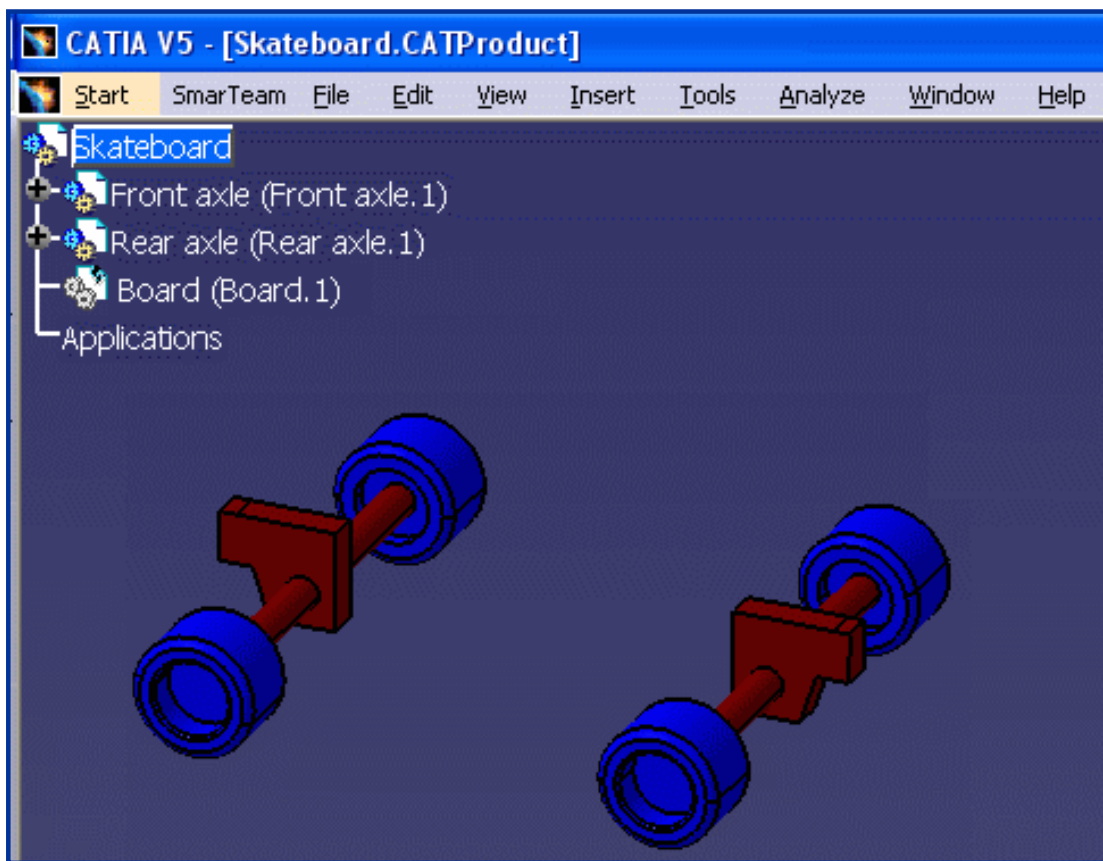


2. Save the skateboard in SmarTeam and check it in.
3. The OEM sends you a second engineering package which still does not contain the Board. Open these documents. The design has been modified. A broken link for the Board is still displayed in the specification tree.

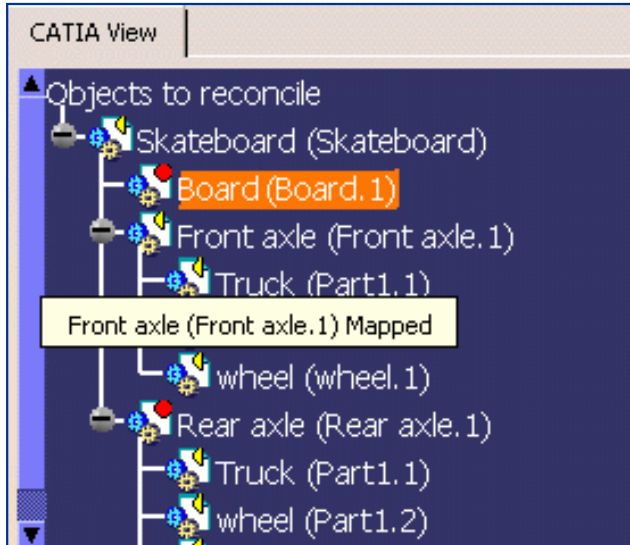


4. To integrate the data sent into SmarTeam, click **Launch Reconciliation** .
5. In the **Reconcile Window** that appears, perform the necessary [query](#) for the documents.



6. The next step consists in [defining reconciliation rules](#). Set the **Overwrite** rule  for the mapped documents as you want to re-write the modifications coming in.
7. Because the board cannot be found in SmarTeam, set **Keep as External**  which is the only rule available for that document. **Keep as External** allows you to keep temporary the broken link in the CATIA session.
When done, the **Objects to reconcile** tree must look like this:

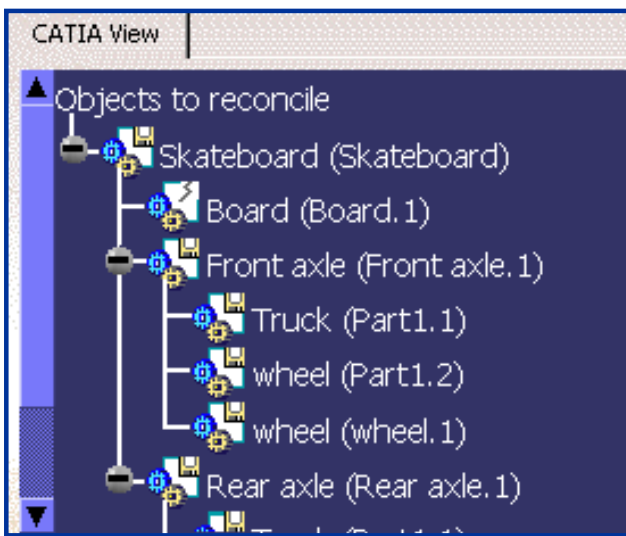


8. Save the skateboard in SmarTeam and check it in.
9. Later on, you decide to modify the skateboard. You add two braking systems to it, although the assembly has got a broken link.

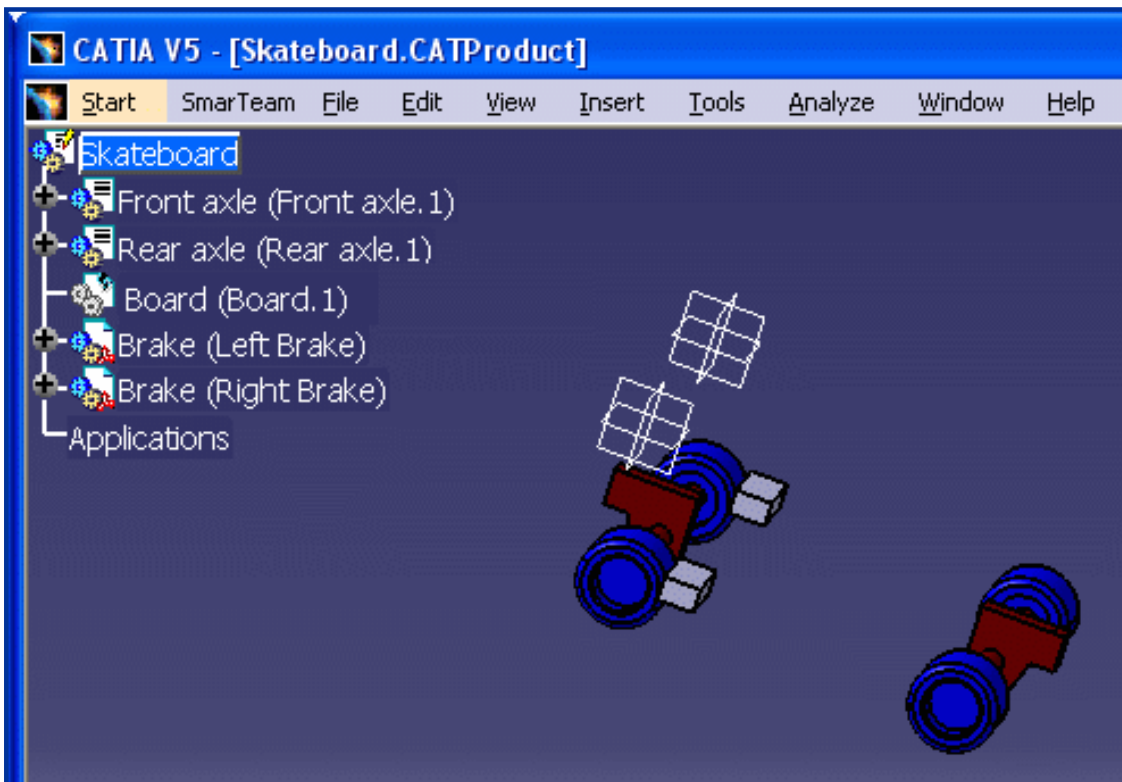


10. Save the skateboard in SmarTeam and check it in.
11. Extract the data and send it to the OEM.
12. The OEM imports the data into his system. If he stores his data in SmarTeam, he will use the ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange to reconcile the data, using the **Reload** rule. Otherwise, if he works on a file base system, he will put all the documents sent by the supplier in a dedicated directory. The board will be found thru CATIA standard localization strategies (**Folder of the link**, **Folder of the pointing** capabilities etc.).

The OEM can work on his latest board and integrate all the modifications made by the supplier, without sharing the whole board design.

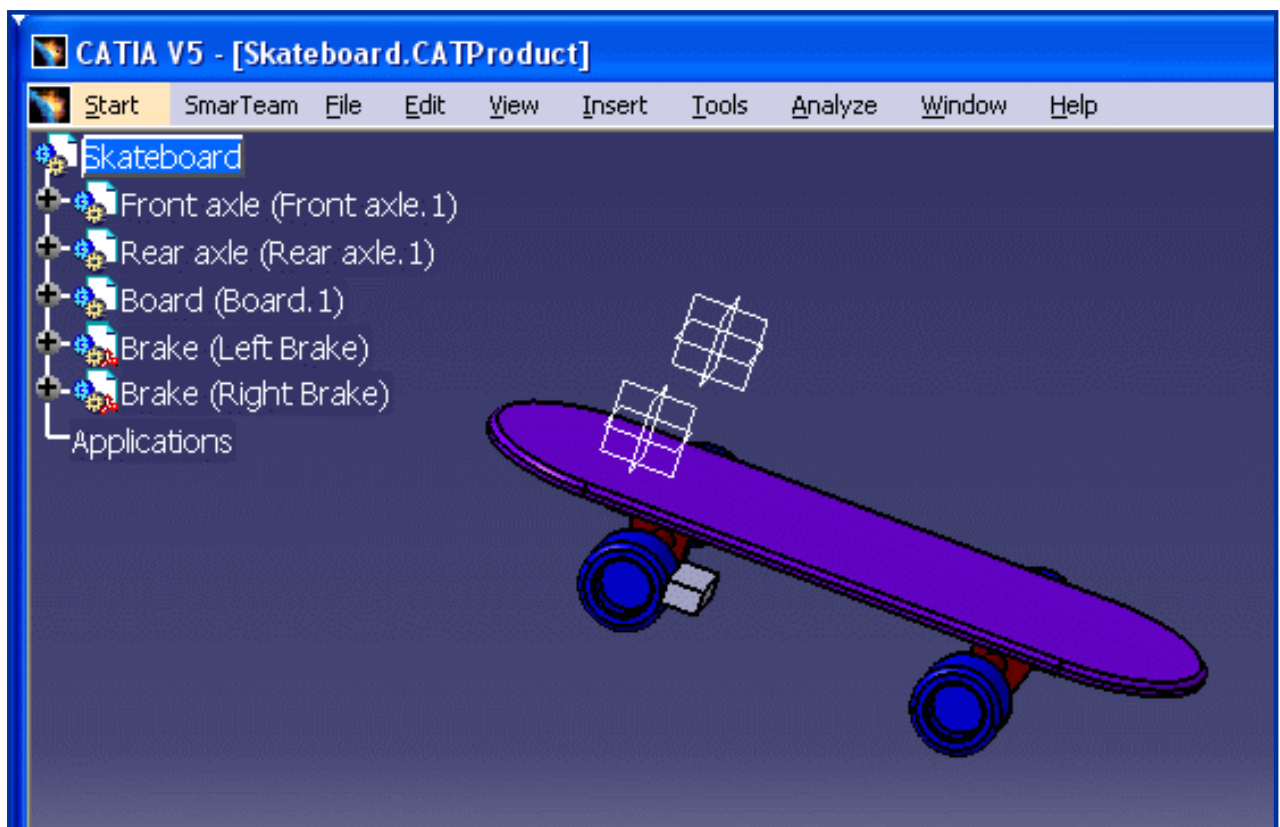
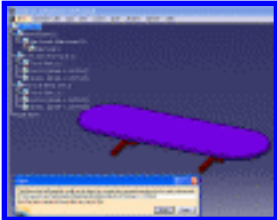





Exchanging Modified Documents Only


-  This section illustrates how to exchange only the documents which have been modified since the previous exchange. We recommend this data exchange method for optimizing all exchanges (bandwidth optimization). The methodology for extracting only a subset of data from SmarTeam consists in:
- opening documents in CATIA
 - launching the **Send To** functionality
 - defining only the documents which need to be extracted.

The extraction methodology is equivalent to the one used for I.P. protection. For more information, see [Exporting Data](#).

In the following example, as a supplier you need to re-integrate documents which have been modified since the last exchange with your OEM. In this scenario, we assume that not all the documents were sent back to you.

-  1. Open the assembly sent by the OEM.
- This assembly constitutes a skateboard. As the wheel has not been sent by the OEM, CATIA displays a broken link in the specification tree.
- 
2. Click **Launch Reconciliation** .
- In the **Reconcile Window**, the CATIA 3D View is empty as the wheel is not present in the CATIA session.
3. Perform the necessary [query](#) for the documents.
- Note that in case you are handling a document stored in ENOVIA, as the part number is not known by the CATIA session, you must use **Interactive-Latest available revision** to identify the appropriate SmarTeam document.
4. To set a reconciliation rule for the missing wheel, you need to choose between two possible rules which are **Reload**  and **Keep as External** .
- When applying the **Reload** rule, the SmarTeam object is kept. The **Keep as External** rule allows you to keep temporary the broken link in the CATIA session so that next time you will open the assembly from SmarTeam, the wheel will be found.

You decide to reload the wheel from SmarTeam.

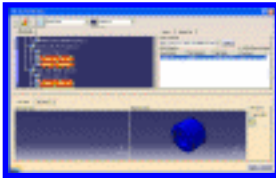

Once the reconciliation is done, the wheel is reloaded. The transfer of incomplete data has not affected the CATIA consistency of your data.



ENOVIA Data

In case of a broken link to a CATPart or CATProduct inside a CATProduct, the Part Number of the missing file is not known. If the document comes from ENOVIA, the file name is not stable (due to ENOVIA revision mechanism) and cannot be used for the identification phase. As there is no accessible information allowing you to identify the missing part or product, you must perform an [interactive query](#).



Reconciling ENOVIA Data with SmarTeam Documents



This section explains how to compare and reconcile a set of CATIA documents proceeding from ENOVIA with documents stored in the SmarTeam database.

Prior to reconciling ENOVIA Data with SmarTeam documents, you must have customized your environment as explained in [Customizing your Environment for Reconciling ENOVIA Data](#).

Concepts

Prior to reconciling ENOVIA data using the ENOVIA SmarTeam - CATIA Supply Chain Engineering Exchange application, you should be familiar with two concepts: Publication Exposed documents and Structured Exposed documents.

Publication Exposed

Used by ENOVIA, this term applies to all document type (CATDrawing, CATPart, CATProduct etc.). The CATIA document information is stored as a document (same as in SmarTeam). For instance, a "Publication Exposed" product will be stored as a CATProduct file in the vault.

As a reminder, SmarTeam - CATIA Integration (CAI) stores CATIA documents as "documents". Therefore, although we do not use the "Publication Exposed" terminology, we can consider that CATIA documents are "publication exposed".

Structure Exposed

Used by ENOVIA V5 VPM, this term applies to product information (CATProduct documents). The product structure information is stored thru database objects and no CATProduct document is stored in the vault. In that case, structure exposed CATProduct documents proceeding from an Open operation in CATIA can be seen as temporary CATIA formats.

In the example below, Skateboard.CATProduct and Board.CATProduct are structure exposed documents.



Set PDM Properties

Document Name	Streamed in Vault	Content exposed	Doc Env
Skateboard.CATProduct	No	Yes	ENOV...
Rear_axle.CATProduct	Yes	No	ENOV...
Front_axle.CATProduct	Yes	No	ENOV...
wheel.CATPart	Yes	No	ENOV...
Board.CATProduct	No	Yes	ENOV...
Main_board.CATPart	Yes	No	ENOV...
Truck.CATPart	Yes	No	ENOV...

Selected Document

Document Name
Board.CATProduct

Document Origin
File

Destination PDM
ENOVIA5

File
VPM1
ENOVIA5

Application Container
☐ Saved
Container name

Storage Mode
☐ Document kept in vault
☐ Publications Exposed
☐ Structure Exposed
☒ Document not kept
☒ Structure Exposed

OK Cancel

Extracting Data

When extracting "publication exposed" data coming from ENOVIA, the extraction consists in loading the data from the vault and saving it on the local disk. The document file name is not guaranteed due to file naming conventions based on the document revision.

When opening "structured exposed" data in CATIA, a temporary CATProduct is created. Its internal CATIA identifier is also temporary (it is created during the ENOVIA>CATIA operation).



Reconciling Data Stored in ENOVIA


Documents Stored as "Publication Exposed"

The file name of the document by default incorporates some ENOVIA naming conventions (the document revision value included). It is necessary to use the Part Number as a query criteria (and not the file name). For more information, see [Customizing Queries](#).

Documents Stored as "Structured Exposed"

We recommend you use the Part Number as a query criteria. The CATIA internal identifier (UUID) is not a stable information across various engineering exchanges. This is the reason why such documents cannot override other versions of documents stored in SmarTeam 'different internal identifiers. **The application therefore proposes to the end-user either to create a new object or to reload another object from the database.**

In the example below, the supplier incorporates all the modifications made by the OEM. He has applied the **Overwrite** rule  to all documents except for the skateboard and the board which proceed from a Structure exposed extraction. For both of these documents, he has applied the **New** rule .

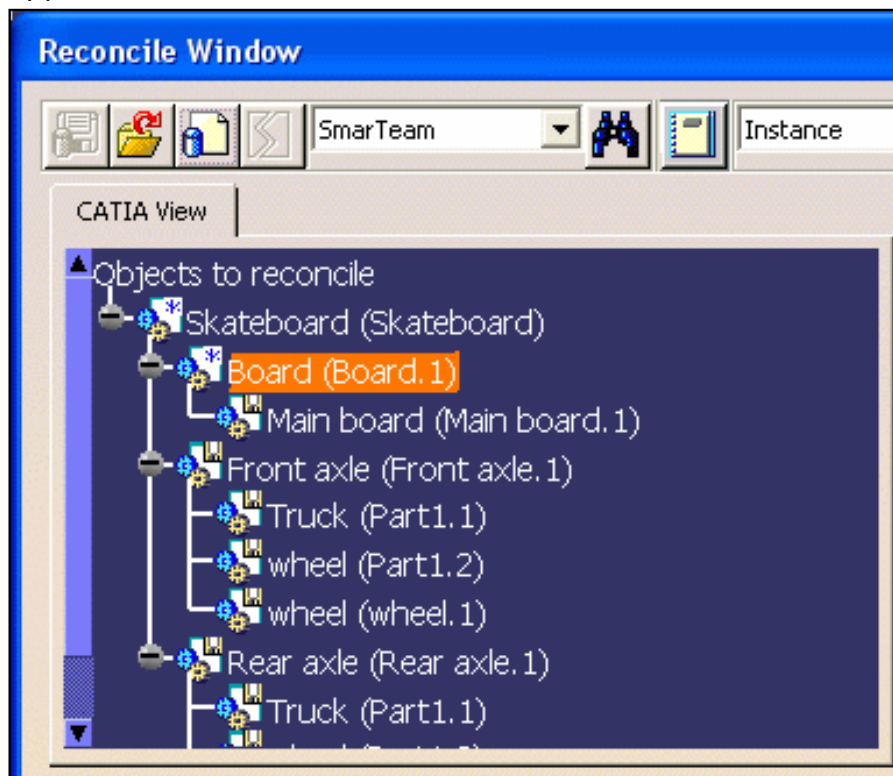


Methodology

To keep the history of the different versions of a product ENOVIA documents, you need to create a fake product. For more information, see [Reconciling ENOVIA Data Saved in Structured Exposed Mode](#).



Reconciling ENOVIA Data Saved in Structured Exposed Mode



 When reconciling ENOVIA data saved in structure exposed mode with SmarTeam data the Overwrite rule cannot be used.

Instead, the [New From](#) rule can be used to create a new document and maintain a link between the original object. An alternate methodology is described below.

It assumes that as an OEM you design the original skateboard, create a fake product for this assembly and save it in SmarTeam. Then you send the fake product only to one of your suppliers. The supplier modifies the data, save it in ENOVIA using the structure exposed mode and then sends it back to you. Now you need to reconcile this ENOVIA data with the documents in your SmarTeam database.

To perform the steps described, first [customize your environment for reconciling ENOVIA data](#).


To know how to reconcile ENOVIA data saved in publication exposed mode, see [Documents Stored as "Publication Exposed"](#).

 Because it is not possible to set the **Overwrite** rule  to CATProduct documents saved in structure exposed mode, to be able to keep the history of the different versions of a product including those documents, you need to create a fake product. In this fake product, you insert the data of your product. The interest of a fake product is that at any time you can know its revisions. This therefore informs you on the revisions performed on all its sub-products and specially on all ENOVIA data.

Before Reconciliation: Creation of a Fake Product

In CATIA you create a fake product as you usually create products.

1. Create a new product in a CATIA session.
2. Still in CATIA, using **Components > Existing Components**, insert the skateboard data (several CATProducts) into this fake product.
3. Name it as "Fake Product".

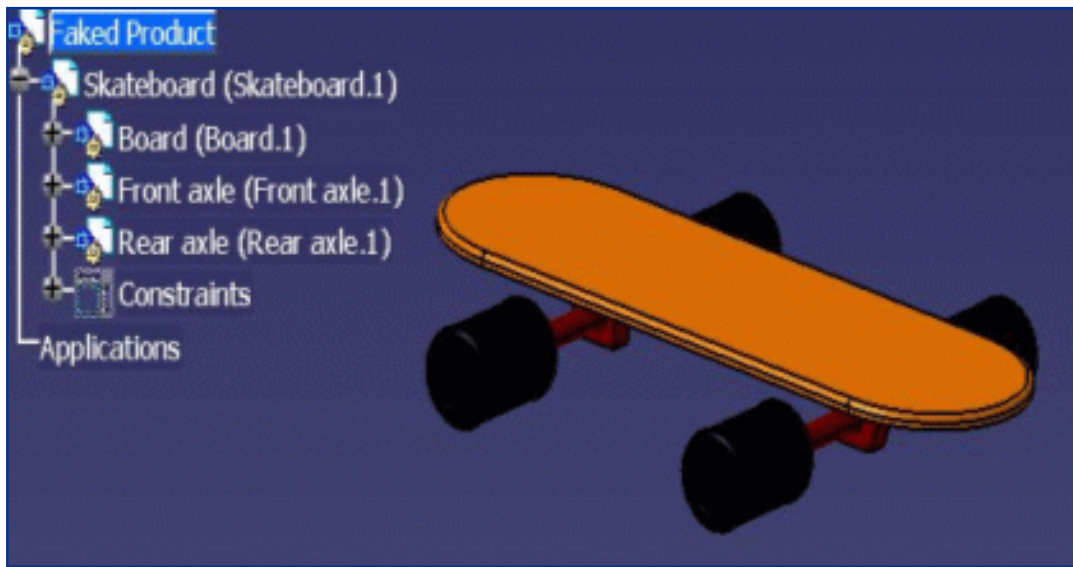


4. Save **Fake Product** in SmarTeam using **SmarTeam > Save** with these options on:
 - **Batch Mode Save**
 - **Add to Desktop**
 - **Link to Projects**
- ☒ Add to Desktop
☒ Link to Projects
5. Select **SmarTeam > Life Cycle > Check In**.
The Check In operation applies to all documents.
 6. Confirm the operation.

Using the Fake Product

In the following tasks, you will link the ENOVIA data to the fake product.


7. In SmarTeam select the fake product document.
8. Right-click to select **File Operation > Open For...**
9. Check the **Open for edit** option in the **Open** dialog box that appears.
The **Open for edit** capability both checks out the document but also copies it.

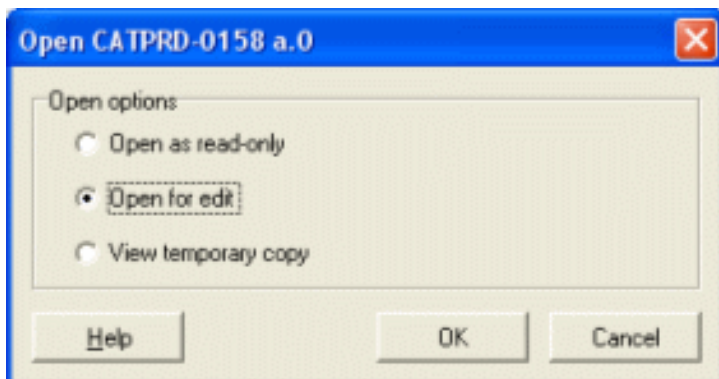


All the documents are now open in the CATIA session.

10. Click the button before the skateboard product so as to retrieve this document

from the **Open for edit** operation. The button must turn gray, as shown below, indicating that no operation will be performed on the corresponding document.

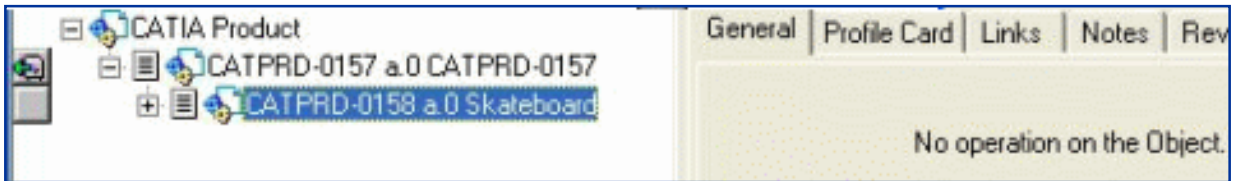

The fake product opens but a warning message is displayed warning you that some files it references could not be found. This is why the symbol for broken links is displayed before Skateboard in CATIA specification tree.

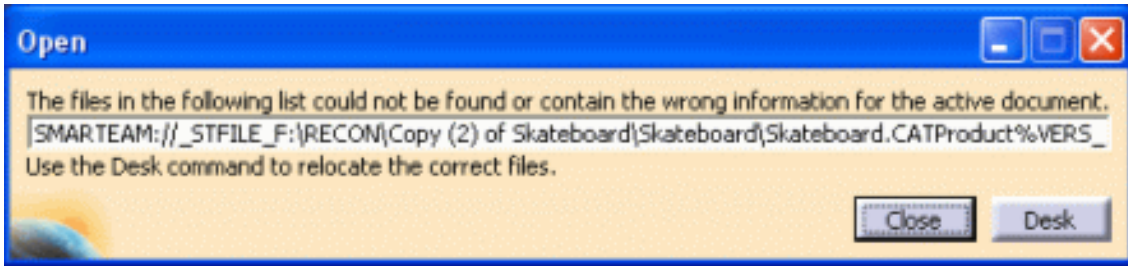

11. Delete Skateboard.1.
12. Right-click **Faked Product** and select **Component > Existing Component** to insert the ENOVIA data sent by the supplier.



When done, the specification tree shows that documents have been inserted are not saved yet in SmarTeam.




Reconciliation of ENOVIA Data


Now that Faked Product references the documents sent back by the supplier, you can run the reconciliation process to incorporate these documents into SmarTeam.

13. Select **SmarTeam > Collaboration > Launch Reconciliation**.
14. Perform the queries you need.

15. Select the rules of your choice for the documents: set **New**  or **Reload**  for ENOVIA products.

Overwrite  is not available.

16. Set Overwrite  for the fake product.
Because the fake product is not an ENOVIA document, you can apply

Overwrite  onto it, which makes it possible to keep the history for the documents it contains.

Documents Pointing to the Documents You Reconciled

If you do not use the fake product methodology described above, reconciling ENOVIA documents saved in Structured exposed mode is still possible. However, after reconciliation, the documents (for example CATDrawings) which used to point onto these documents before being sent to suppliers will no longer point onto reconciled documents.

In a nutshell, fake products:

- allow you to keep the history of of the different versions of a product including documents saved in structure exposed mode in ENOVIA,
- allow you to keep the links between SmarTeam documents pointing onto ENOVIA documents you reconcile.



Reconciling an Assembly Containing a Contextual Part




The application reconciles single root assemblies. If you need to reconcile an assembly containing a contextual part, outside its context, this leads to extending the scope of reconciliation analysis out of the current assembly. The context is kept out of the reconciliation scope and the only rule available for the contextual part is **Reload**.

A contextual part can be updated (**Overwrite** rule available) only if it is loaded inside its contextual product.




1. When reconciling an assembly containing a contextual part, the application triggers a message informing you that the reconciliation can be performed only for one single root assembly.

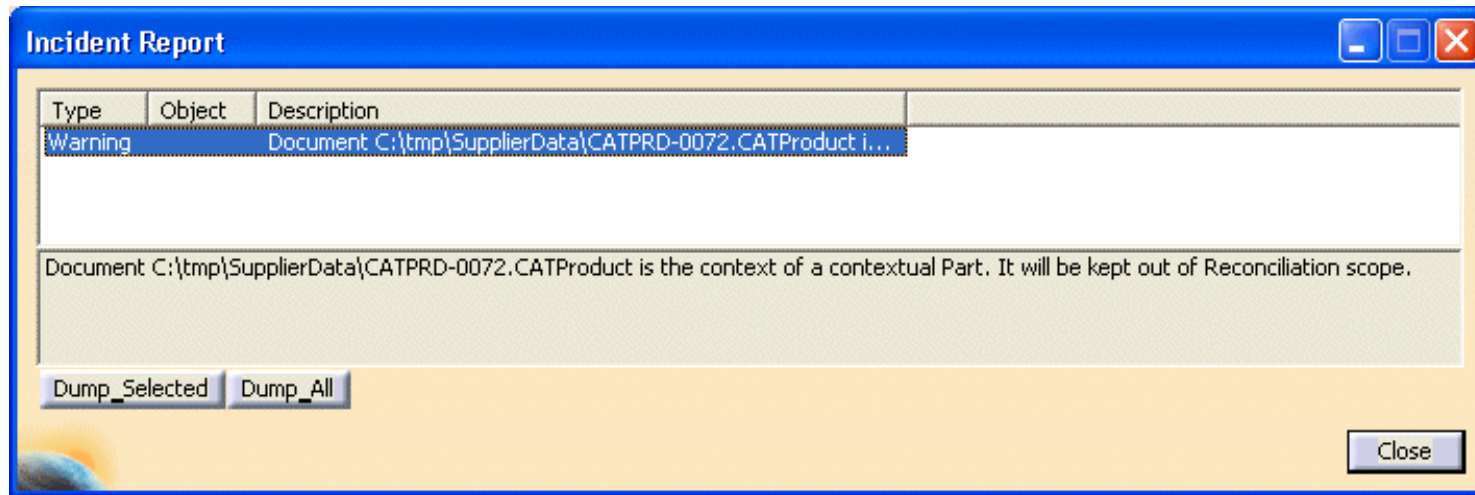

2. The Contextual product is kept out of the reconciliation scope: the only rule available and automatically set is **Keep External Reference**



3. The only rule available for the contextual part is reload .

Glossary



Symbols

3D XML

EXtensible Markup Language. A universal, lightweight, XML-based format that enables users to capture and share live, accurate 3D data quickly and easily.

3D XML compresses highly complex data, provides rapid file transmission and shorter load times while maintaining the exact geometry of the files exchanged.

C



check in operation

A lifecycle operation that checks in:

- a new object and places its file in the SmarTeam Checked In vault, or
- a checked out object (being modified) and places the file back in the SmarTeam Checked In vault.

check out operation

A lifecycle operation that retrieves files from the SmarTeam Checked In vault. It is the first operation to do prior to making modifications to a file that is checked in to the SmarTeam vault.

class

A set of objects that share common structure and common attributes. Every engineering entity is an object that can be classified.

D



default

An operation or value that the system or application assumes, unless a user makes an explicit choice.

dialog box

A window that gathers additional information from a user. A dialog box usually contains one or more controls, such as buttons, list boxes, combo boxes, and edit boxes, with which the user enters text, chooses options, or directs the action of the command.

document

A common unit of data (typically a file) used in user tasks and exchanged between users.

G



geometry area Area of a document window in which application data are displayed and edited.

M



model

A CATIA Version 4 document.

O



object

An entity or component identifiable by a user that can be distinguished by its properties, operations, and relationships.

P



part

A 3D entity obtained by combining different features.

R



release lifecycle operation

A lifecycle operation that changes the revision designation of a part.

S






specification tree

Area of the document window reserved for viewing the design specifications of a part, presented in the form of a tree structure.

Index

[A](#) [B](#) [C](#) [D](#) [E](#) [F](#) [I](#) [O](#) [P](#) [R](#) [S](#) [T](#) [U](#) [W](#)

A

- adding custom query to global set 
- assembly 
- authorized reconciliation rules 















B

- broken link  





C

- CATIA_TEAM_PDM_SEE_AUTO_PRESELECTION
 - environment variable 
- commands
 - only rules (Reset) 
 - Reset  
 - Reset all  
 - Show Profile Card  
- contextual part 
- customizing
 - for ENOVIA data 
 - reconciliation rules 
 - settings 




D

- define custom query 
- defining in xslt 





E

ENOVIA data 

environment variable

CATIA_TEAM_PDM_SEE_AUTO_PRESELECTION 


exchanging modified documents only 

exporting data 



F

for ENOVIA data

customizing 



I


Intellectual Property Protection (I.P.)  

interface description 



O

only rules (Reset)

commands 




P

Publication Exposed 



R

reconciliation rules 

customizing 

Reset

commands



Reset all

commands



S

settings

customizing



Show Profile Card

commands



SMARTTEAM Integration Tool Setup

utilities



Structure Exposed



T

Tools Options - Product Structure

Reconciliation



U

utilities

SMARTTEAM Integration Tool Setup



W

What Is New

