

# **CATIA V5 Automotive Extensions Vehicle Architecture**

## ***Administration Guide***

---

**BPA Delivery 7 for V5R19 (V 5.7)**

## Symbols Used in the Manual

For better orientation in the manual the following symbols are used:

### Warning symbol



The warning symbol signals *critical moments* to which you should pay attention in order to avoid problems in your work process.

### Tip symbol




The lamp symbol signals a *tip* that offers you practical experience to make your work easier.

### Info Symbol



The info symbol signals a background *information*.

### Step Symbol



The step symbol signals that a *sequence of work operations* is given.

## Table of Contents

1.	Software and Hardware Requirements .....	4
2.	Installing.....	5
2.1	Installing under WINDOWS.....	5
2.1.1	Uninstalling.....	10
2.2	Installing under UNIX.....	11
2.2.1	Unpacking the Files .....	11
2.2.2	The Created Directory Structure.....	12
2.2.3	Adapting CAVA to the Local CATIA Installation .....	12
2.2.3.1	Creating a New CATIA Environment .....	12
2.2.3.1.1	Adapting the Declaration to the Local CATIA Installation .....	13
2.2.3.1.2	Defining the Action Options .....	14
2.2.3.1.3	Creating an Environment.....	14
2.2.3.2	Expanding an Existing CATIA Environment .....	15
2.3	Uninstalling under UNIX.....	16
3.	How to register a License for BPAs .....	17
3.1	LUM Implementation: Environment Setup .....	17
3.1.1	Enrolling a Nodelock license:.....	18
3.1.2	Enrolling a Concurrent license on the Network license server .....	19


\* \* \*

# 1. Software and Hardware Requirements

Hardware:	CATIA:
No additional added to the CATIA HW pre requisites	Minimal required version: V5 R19 (according current BPA version, others on demand)
Operation systems (minimal required versions)	
<ul style="list-style-type: none"> <li>– WINDOWS XP PROFESSIONAL SP2 (32bit)</li> <li>– WINDOWS XP PROFESSIONAL x64 Edition</li> <li>– WINDOWS VISTA x86</li> <li>– WINDOWS VISTA x64</li> <li>– AIX 5.3 TL5-SP3 (using 64-bit kernel)</li> <li>– HP-UX 11.11</li> <li>– SOLARIS 10 HW 03/05</li> </ul> <p>Note: Requirements are according to minimum level for CATIA V5R19 as defined in the Program Directory)</p>	

## 2. Installing


### 2.1 Installing under WINDOWS




#### STEPS:

Do the following steps to install CAVA:

- (1) Unpack the CAVA package zip file to a location of your choice. As result you should have a collection of files as listed to the right.



- (2) Start the installation routine in WINDOWS EXPLORER by double-clicking on the `setup.exe` file
- (3) If the recommended CATIA Release is not installed on your computer, the setup procedure will abort with the following message:

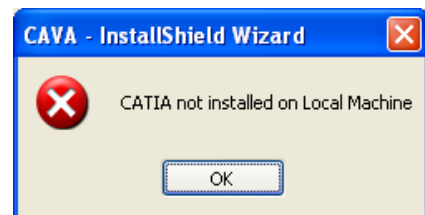

- (4) If the recommended CATIA release was found, the setup procedure will continue. Follow the installation instructions displayed on the monitor, which will be explained in the following text.

After starting the CAVA setup executable file; the following welcome screen will be displayed.

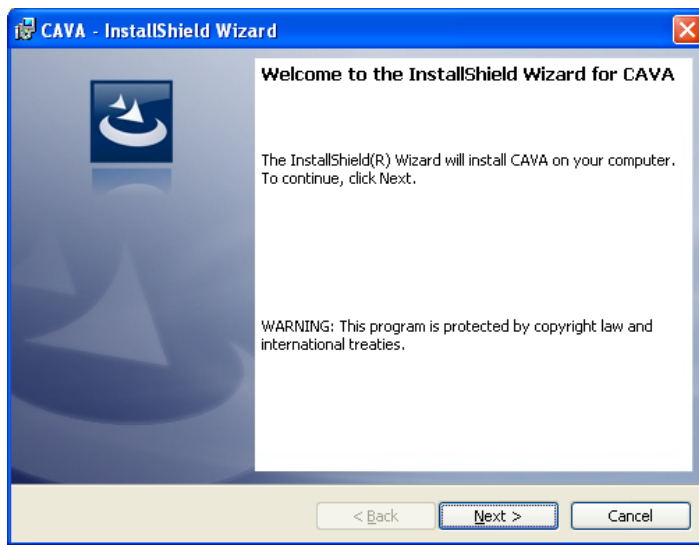


Fig. 2—1: “Welcome” screen of the CAVA installation routine

- To continue installing, click the *Next* button.
- To abort the installation, click the *Cancel* button.  
The installation can be aborted in every one of the installation steps by clicking the *Cancel* button; all installation actions performed then will be undone.

## Entering User and Company name

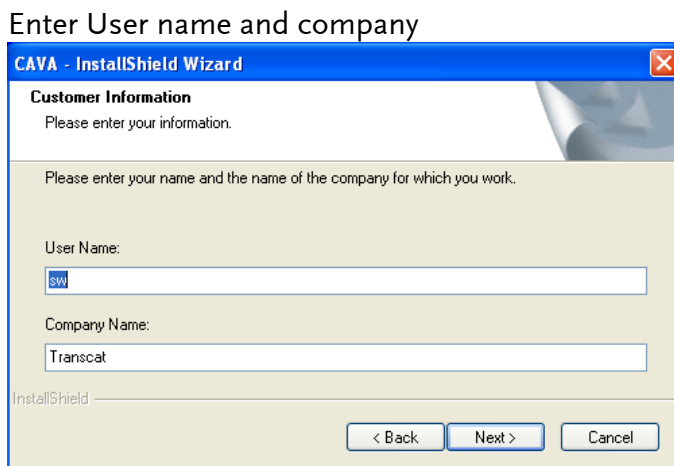


Fig. 2—2: User and Company name

## Selecting the installation directory for the CAVA program files



Fig. 2—3: Selecting the installation directory

In this dialog box, the installation directory for CAVA is to be selected. This window offers two alternatives:

- (1) To accept the indicated directory. To do so, press the *“Next” button*, the next installation step will be initiated.
- (2) To define your own installation directory. To do so, press the *Change* button and select in the *Choose Folder* dialog box a target directory (see Fig. 2—4).

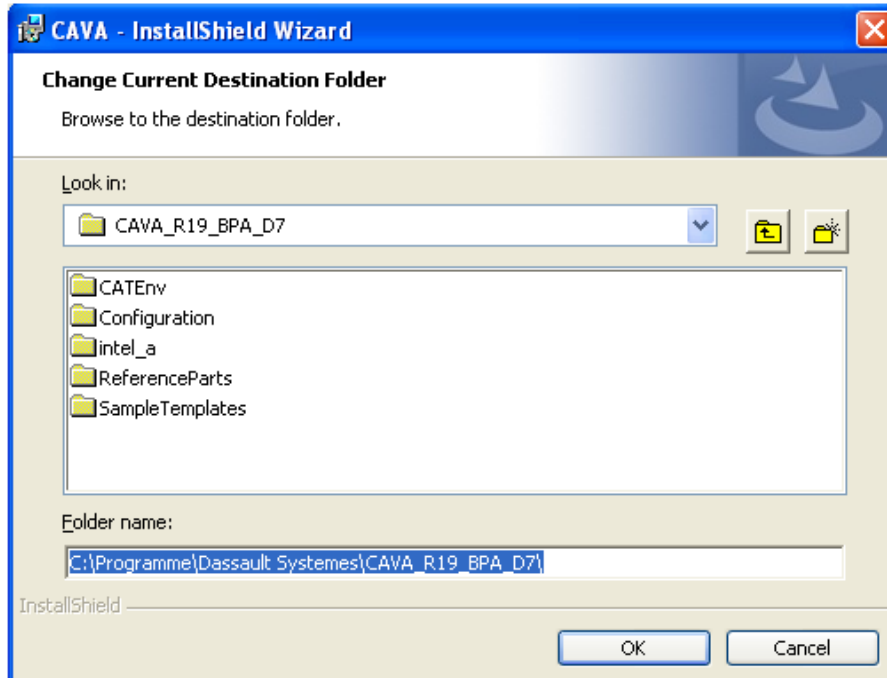


Fig. 2—4: Selecting your own installation directory

After having selected the directory, confirm the selection by clicking the *OK* button. After that, the preceding window will be reopened with the selected directory name filled in. After clicking the *Next* button, the *CATIA installation location* dialog box will be opened.

## Selecting the CATIA application directory

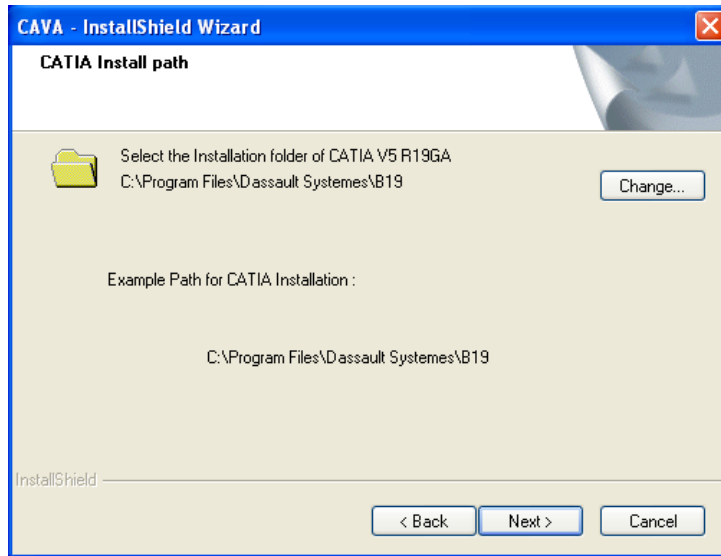


Fig. 2—5: Selection of CATIA application directory

In this dialog box, the installation directory for CATIA is to be selected. This window offers two alternatives:

- (1) To accept the indicated directory. To do so, press the "*Next*" button, the next installation step will be initiated.
- (2) To define your own installation directory. To do so, press the *browse* button and select in the *Choose Folder* dialog box a target directory (see Fig. 2—4).



## Start installation

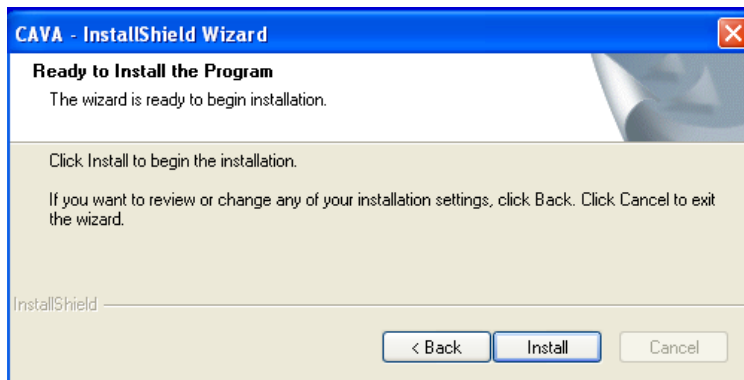


Fig. 2—6: Start installation

Click on install to copy all files in the specified directory. Additionally the setup program creates a new CATIA environment file inside a new CATEnv folder in your CAVA source directory for starting CAVA.

## Finish installation

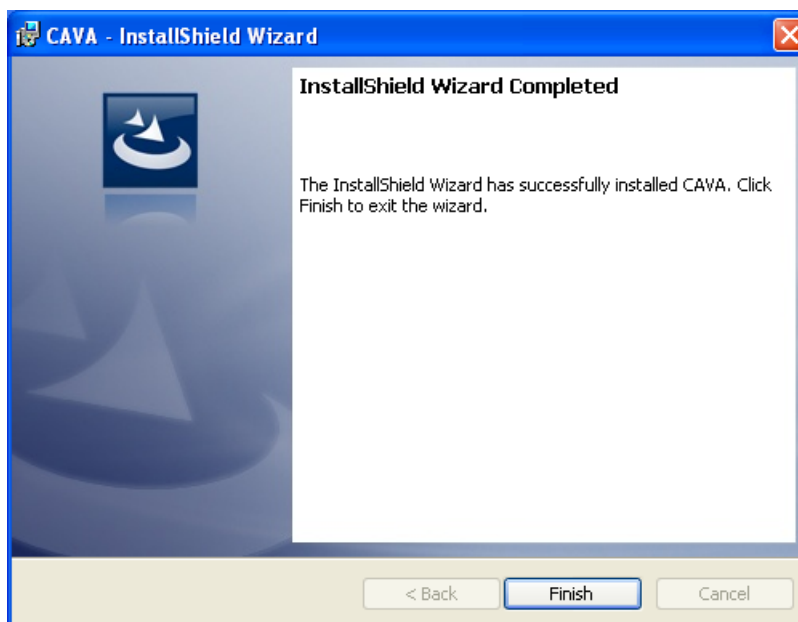


Fig. 2—7: Finish installation

Click the *Finish* button to complete the installation.

On your PC desktop you have now an icon named “CAVA\_R19\_GA\_D6”. With this icon, you can start CATIA with integrated CAVA workbench.

The installation directory that you have selected during the installation process contains the following folders:


•Intel_a	Contains the CAVA program files.
•Configuration	Contains the CAVA configuration files in several sub folders.
•SampleTemplates	Contains the DrawingTextConfiguration and ReportTemplates sub-directories with some pre-defined sample templates, which can be used as base to create own templates that fit to your own special need.
•ReferenceParts	Contains files that are referenced by certain CAVA features to create geometry.



Before starting the work with CAVA, some basic settings must be done.

In the CAVA *General* manual you can learn which settings must be made imperatively, and which ones are optional.

### 2.1.1 Uninstalling



#### STEPS:

To uninstall CAVA, do the following steps :

- (1) Click in WINDOWS the *Start* button and select the menu sequence *Settings > Control Panel > Add/Remove Programs*.
- (2) Select CAVA and click the *Add/Remove* button.

## 2.2 Installing under UNIX

### 2.2.1 Unpacking the Files




To designate the installation files, the following representation form is used:

`CAVA_RXX_osds_Dy.tar`

where:

RXX      – CATIA release  
osds     – platform designation, i.e. `aix_a`  
y         BPA Delivery



STEPS:

Unpacking comprises three steps. Dependent on the format of your install files, the steps (1) and/or (2) can be skipped.

(1) If the data is available as `CAVA_Rxx_osds_Dy.tar` file, do the following:

Action	OS <sup>1</sup>	Example:
Rename the TAR-archive file.	*	<code>mv CAVA_RXX_osds_Dy.tar CAVA_RXX_osds_Dy.tar.Z</code>

(2) If the data is available as `CAVA_RXX_osds_Dy.tar.Z` file, do the following:

Action	OS <sup>1</sup>	Example:
Copy the TAR-archive into an installation directory of choice.	*	<code>cp CAVA_RXX_osds_Dy.tar.Z /catdat/tcsoft/CAVA</code>
Change directory to the installation directory.	*	<code>cd /catdat/tcsoft/CAVA</code>
Unpack the archive file.	*	<code>zcat CAVA*.tar.Z   tar -xvf</code>

*Or:* If the data is available as compressed and packed `CAVA_RXX_osds_Dy.tar.gz` file, do the following:

Action	OS <sup>1</sup>	Example:
Copy the TAR-archive into an installation directory of choice.	*	<code>cp CAVA_RXX_osds_Dy.tar.gz /catdat/tcsoft/CAVA</code>
Change directory to the installation directory	*	<code>cd /catdat/tcsoft/CAVA</code>
Unpack the archive file	*	<code>gzip -d -c CAVA*.tar.gz   tar -xvf</code>

### 2.2.2 The Created Directory Structure

Directory	OS <sup>1</sup>	Description
CAVA_RXX_osds_Dy	*	Directory for CAVA program-modules for AIX/HP/Solaris
CAVA_RXX_osds_Dy/aix_a or aix_a64	AIX	Program-modules for AIX
Or CAVA_RXX_osds_Dy/hpux_b Or CAVA_RXX_osds_Dy/solaris_a	HP SUN	Program-modules for HP Program-modules for SUN
CAVA_*Dy/Configuration	*	Directory for the configuration files
CAVA_*Dy/SampleTemplates		Directory for the sample template files
CAVA_*Dy/ReferenceParts		Directory for the files that are referenced by certain CAVA features to create geometry
CAVA_*Dy/CAVAEnv.sh	*	Shell script to enlarge existing environment
CAVA_*Dy/CAVASEnv.sh	*	Shell script to create new environment

### 2.2.3 Adapting CAVA to the Local CATIA Installation

Adapting CAVA to the local installation can be made in two ways:

- (1) Creation of a new CATIA environment and automatic creation of a CATIA-CAVA-icon in the application manager → see chapter 2.2.3.1.
- (2) Expanding an existing CATIA environment → see chapter 2.2.3.2.

#### 2.2.3.1 Creating a New CATIA Environment

For the creation of a new CATIA environment, with the CAVA-software the shell script `CAVASEnv.sh` is delivered.

Below you will find an excerpt from this file. Check the passages marked **gray**, they might need to be adapted. The information how to do this you will find in the subchapters below.

```
...
# Name of the new environment
#
CAVA_ENV="CATIA_CAVA"
#
# Store the new environment in this directory
#
CAVA_ENV_PATH="$HOME/CATEnv"
#
# Installation directory of CAVA
#
CAVA_INSTALLATION="/catdat/tcsoft/CAVA"
#
# Catia installation directory
#
CATIA_INSTALLATION="/usr/catiav5r19/B19"
#
# Additional CATIA variables
change_cat_env()
{
    chcatenv -e $CAVA_ENV -d $CAVA_ENV_PATH -new
}
#

setcatenv -e $CAVA_ENV -d $CAVA_ENV_PATH -p $CATIA_INSTALLATION:$CAVA_INSTALLATION -new yes
-desktop yes -a global \
    && change_cat_env || echo "\aCreating the environment failed."
```

### 2.2.3.1.1 Adapting the Declaration to the Local CATIA Installation

The following CAVA variables must be adapted to the local installation. The entries shown in the example above are only an example.


Variable	Description:
CAVA_ENV	Name of the CAVA-CATIA environment (without file extension)
CAVA_ENV_PATH	Path to the folder that contain the environment file
CAVA_INSTALLATION	Path where CAVA is installed (Up to the folder that contains the osds folder)
CATIA_INSTALLATION	Path where CATIA V5 is installed

### 2.2.3.1.2 Defining the Action Options

For the creation of CATIA environments different options exist:

Variable	Value	Description:
-new	yes	An existing environment with the same name will be replaced. (Recommended)
	no	An environment with the same name will be not replaced; the existing environment will be maintained.
-desktop	yes	On the desktop an icon of the environment is created. (Recommended)
	no	On the desktop an icon of the environment is not created.
-a	global	A global environment is created. Note: To create a global environment you must have administrator rights.
	user	A user environment is created.

### 2.2.3.1.3 Creating an Environment



To create the above-mentioned CATIA environment, execute the CAVASetEnv.sh shell script.

Steps	OS <sup>1</sup>	Example:
(1) Switch to the installation directory	*	<code>cd /catdat/tcsoft/CAVA</code>
(2) Execute the script	*	<code>. ./CAVASetEnv.sh</code>



*Note:*

To create a global environment you must have administrator rights.



*Note:*

The icon for the CATIA-CAVA environment that can be renamed by the user (on screenshot below named CAVA\_1.1.x) will be displayed in the application manager in the CATIA directory only after re-login.


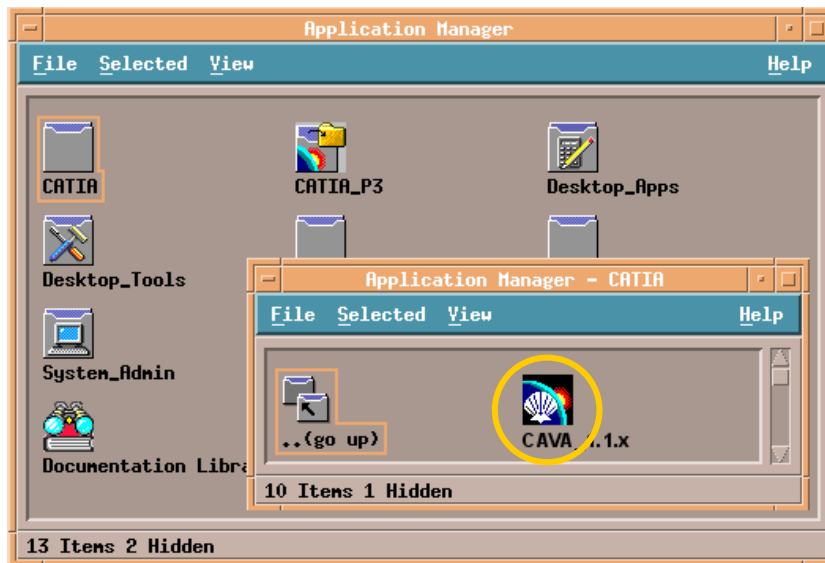


Fig. 2—8: Icon for the CAVA environment

### 2.2.3.2 Expanding an Existing CATIA Environment



To integrate CAVA in an existing CATIA environment, do the following steps:

(1) If necessary, adapt the shell script.

For the expansion of an existing CATIA environment, with the CAVA-software the shell scripts `CAVAEnv.sh` is delivered.

Below you will find an excerpt from a shell script file (the excerpt is only an example). Check the passages marked **gray**, they might need to be adapted.

Variable	Description:
CAVAPATH	Path where CAVA is installed

```
set +u
# Install path of CAVA directory
CAVAPATH=/catdat/tcsoft/CAVA
\export CAVAPATH
```

(2) Set the CATIA environment.

Example:

```
. /transcat/CATEnv/CATIA_P3.V5R19.B19.sh  
. /catdat/tcsoft/CAVA/CAVAEnv.sh
```

(3) Start CATIA V5 by CNEXT.

## 2.3 Uninstalling under UNIX

To remove the CAVA Installation from your computer, do the following:

- Delete the CAVA installation directory with all its sub folders.
- Delete the CATIA environment file if it was especially created for CAVA.
- Remove the desktop icon that was created to start CATIA with the CAVA workbench.



## 3. How to register a License for BPAs

### 3.1 LUM Implementation: Environment Setup

► Precondition to enroll licenses:


On the server LUM 4.6.8 or above must be installed.



#### GENERAL STEPS

Action	Details
(1) Request at DS a license with following information:	<ul style="list-style-type: none"> <li>• Product Name: This is the BPA trigram.</li> <li>• License Type: <i>nodelock</i> or <i>concurrent</i></li> <li>• Number of License:               <ul style="list-style-type: none"> <li>1 for nodelock ,</li> <li>&gt;0 for Concurrent</li> </ul> </li> <li>• LUM target ID: Provide the target ID (run i4target)</li> <li>• On client side for <i>Nodelock</i></li> <li>• On server side for <i>Concurrent</i></li> </ul>
(2) Having received the license, enroll it.	<p>For detailed description for enrolling licenses see:</p> <ul style="list-style-type: none"> <li>• <i>Concurrent</i> license—on page 18.</li> <li>• <i>Nodelock</i> license—on page 19.</li> </ul>


### 3.1.1 Enrolling a Nodelock License



#### WORKING STEPS TO ENROLL A NODELOCK LICENSE

Modify/Create the nodelock file by inserting the VendorID and ProductPassword.

As BPA products are not integrated into the NodelockKeyManagement of CATIA, you should input yourself the parameters of your license into the nodelock file (create it if it does not exist).

Action	Details
(1) Open Nodelock file  If the Nodelock file does not exist, create a new one.	This file is located in: <ul style="list-style-type: none"> <li>• For windows: C:\Documents and Settings\All Users\Application Data\IBM\LUM\nodelock</li> <li>• For AIX: /var/ibm/lum/nodelock</li> <li>• For HP and Solaris: /var/lum/nodelock</li> </ul>
(2) Open the licenses (.lic) file that you have purchased with a common text editor and extract the following information:	<ul style="list-style-type: none"> <li>• VendorID (looks like a UUID)</li> <li>• ProductPassword (a crypted key)</li> <li>• ProductAnnotation (should be unset)</li> <li>• ProductVersion (should be set to 1)</li> </ul>
(3) Insert the information in the Nodelock file by respecting the order:	# comment: put your BPA trigram and its range date  <pre> vendorID ProductPassword ProductAnnotation ProductVersion           </pre>
• Example: <pre> # CO9 from 15-Jul-08 to 14-Jul-09 c6c8ef44bcb7.4a.74.95.13.1f.00.00.00 r8ezikjzgsvk9fzf7fe3p2gn3eaa "" "1"           </pre>	
 <b>Note:</b> The licence text line (in our example the second line) must be written in one only line!	






### 3.1.2 Enrolling a Concurrent license on the Network license server



To enroll a concurrent license, you have first to set up the network license server—see (A). Only when this is done, you can enroll the concurrent license—see (B).



#### SETTING UP THE NETWORK LICENSE SERVER AND ENROLLING A CONCURRENT LICENSE

Action	Details
<b>(A) Setting up the network license server</b>	
(1) Open the Configuration tool.	<i>Start &gt; All Programs &gt; License Use Runtime &gt; Configuration tool</i>
(2) If needed, stop the service using the Service Manager Tool.	 
(3) Ensure that the option for “Network License Server” is selected.	

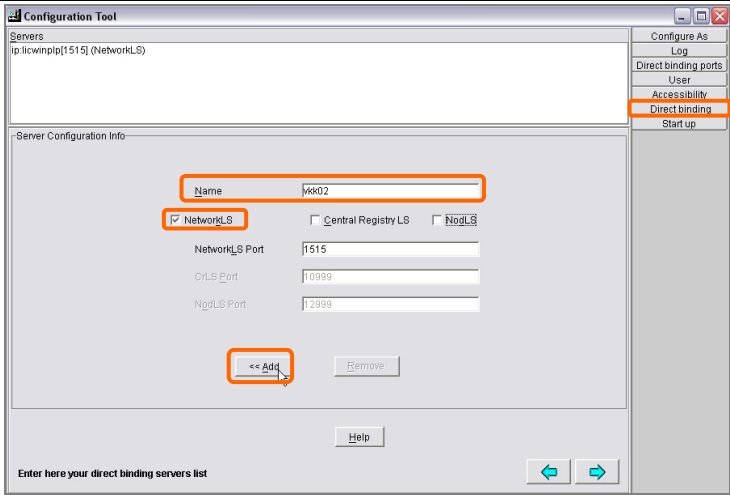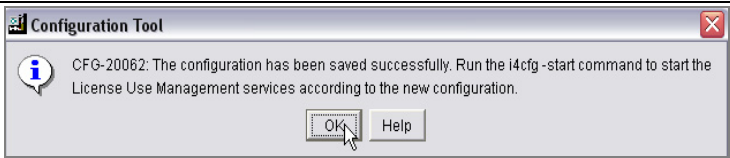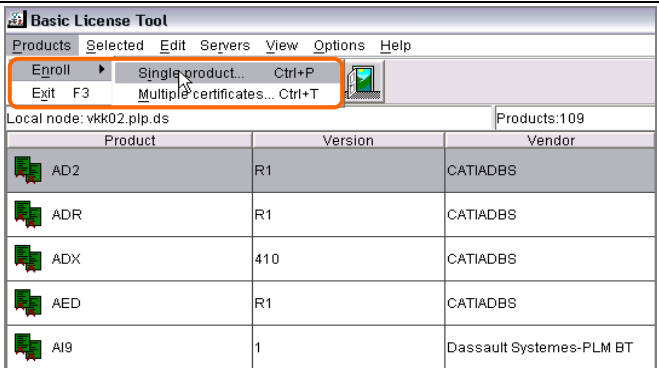Action	Details
(4) Switch to the “Direct binding” tab card.	
(5) In the Name text box enter the machine name of your license server.	
(6) Check the box for NetworkLS and click on Add button.	
(7) Close the Configuration Tool window and validate accepting the changes.	
(8) Pass the message to restart the service (if previously it was stopped).	 
<b>(B) Enrolling the concurrent license</b>	
(9) Open the Basic License Tool	<i>Start &gt; All Programs &gt; License Use Runtime &gt; Basic License Tool</i>
(10) Select Product > Enroll > ...	
(11) Choose Single or Multiple depending on whether you want to enroll a single or multiple licenses at a time.	

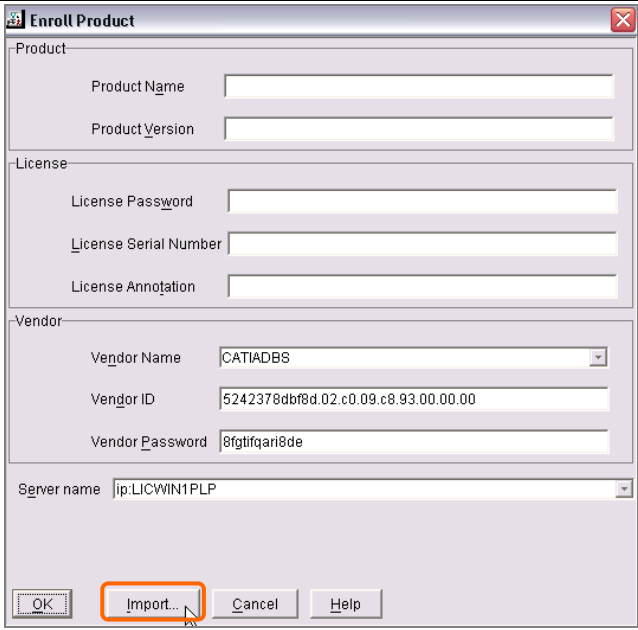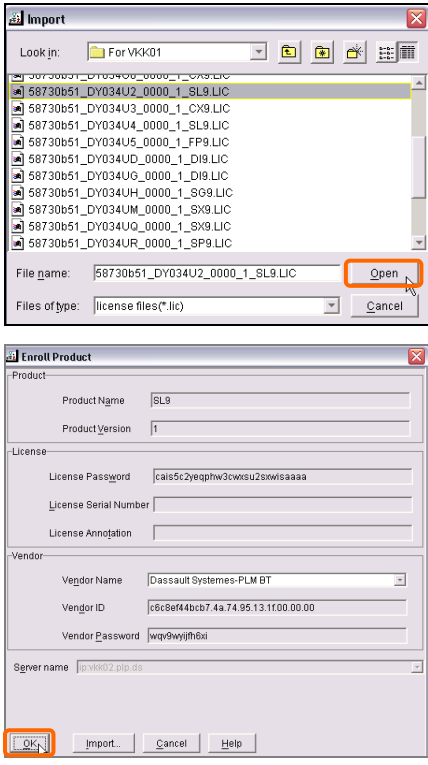Action	Details
(12) Click on the Import button.	 <p>The 'Enroll Product' dialog box is shown with the following fields:</p> <ul style="list-style-type: none"> <li><b>Product:</b> Product Name, Product Version</li> <li><b>License:</b> License Password, License Serial Number, License Annotation</li> <li><b>Vendor:</b> Vendor Name (CATIADBS), Vendor ID (5242378dbf8d.02.c0.09.c8.93.00.00.00), Vendor Password (8ftgfqari8de)</li> <li>Server name (ip:LICWIN1PLP)</li> <li>Buttons: OK, <b>Import...</b>, Cancel, Help</li> </ul>
(13) Locate the received Concurrent file in the file browser and click in the panels <i>OPEN</i> and <i>OK</i> respectively to get the license successfully enrolled.	 <p>The first screenshot shows a file browser window with the following details:</p> <ul style="list-style-type: none"> <li>Look in: For Vtk01</li> <li>File list: 58730b51_DY034U2_0000_1_SL9.LIC, 58730b51_DY034U3_0000_1_SL9.LIC, 58730b51_DY034U4_0000_1_SL9.LIC, 58730b51_DY034U5_0000_1_FP9.LIC, 58730b51_DY034U6_0000_1_DI9.LIC, 58730b51_DY034U7_0000_1_DI9.LIC, 58730b51_DY034UH_0000_1_SG9.LIC, 58730b51_DY034UM_0000_1_SX9.LIC, 58730b51_DY034UQ_0000_1_SX9.LIC, 58730b51_DY034UR_0000_1_SP9.LIC</li> <li>File name: 58730b51_DY034U2_0000_1_SL9.LIC</li> <li>Files of type: license files (*.lic)</li> <li>Buttons: Open, Cancel</li> </ul> <p>The second screenshot shows the 'Enroll Product' dialog box with the following details:</p> <ul style="list-style-type: none"> <li><b>Product:</b> Product Name (SL9), Product Version (1)</li> <li><b>License:</b> License Password (cais5c2yeqphw3cwsu2snwisaaaa), License Serial Number, License Annotation</li> <li><b>Vendor:</b> Vendor Name (Dassault Systemes-PLM BT), Vendor ID (c6c8ef44bcb7.4a.74.95.13.1f.00.00.00), Vendor Password (wq99wyjrh6xi)</li> <li>Server name (ip:Vtk02.plp.ds)</li> <li>Buttons: <b>OK</b>, Import..., Cancel, Help</li> </ul>

### 3. HOW TO REGISTER A LICENSE FOR BPAS

Action	Details																																																
<div>▶ The license is enrolled.</div>	<div><div>Basic License Tool</div><div>Products Selected Edit Servers View Options Help</div><div><div>Local node: vkk02.plp.ds</div><div>Products:109</div><table><tr><th>Product</th><th>Version</th><th>Vendor</th><th>Licenses</th><th>In Us...</th><th>Bundle Components</th></tr><tr><td> FP9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>0</td><td>No</td></tr><tr><td> PF9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>0</td><td>No</td></tr><tr><td> SG9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>0</td><td>No</td></tr><tr><td> SL9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>1</td><td>No</td></tr><tr><td> SP9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>2</td><td>No</td></tr><tr><td> SX9</td><td>1</td><td>Dassault Systemes-PLM...</td><td>3</td><td>0</td><td>No</td></tr><tr><td> LicensePowerIFOR Te...</td><td>1.0</td><td>LicensePowerIFOR Test...</td><td>30000</td><td>0</td><td>No</td></tr></table></div></div>	Product	Version	Vendor	Licenses	In Us...	Bundle Components	FP9	1	Dassault Systemes-PLM...	3	0	No	PF9	1	Dassault Systemes-PLM...	3	0	No	SG9	1	Dassault Systemes-PLM...	3	0	No	SL9	1	Dassault Systemes-PLM...	3	1	No	SP9	1	Dassault Systemes-PLM...	3	2	No	SX9	1	Dassault Systemes-PLM...	3	0	No	LicensePowerIFOR Te...	1.0	LicensePowerIFOR Test...	30000	0	No
Product	Version	Vendor	Licenses	In Us...	Bundle Components																																												
FP9	1	Dassault Systemes-PLM...	3	0	No																																												
PF9	1	Dassault Systemes-PLM...	3	0	No																																												
SG9	1	Dassault Systemes-PLM...	3	0	No																																												
SL9	1	Dassault Systemes-PLM...	3	1	No																																												
SP9	1	Dassault Systemes-PLM...	3	2	No																																												
SX9	1	Dassault Systemes-PLM...	3	0	No																																												
LicensePowerIFOR Te...	1.0	LicensePowerIFOR Test...	30000	0	No																																												

\* \* \*