

Flash Management Console 3.15.0

Tools Guide

Table of Contents

Table of Contents	ii
Introduction	1
SMI-S CIM Model	2
SMI-S Interface (Linux)	3
Introduction to the SMI-S Interface	3
Installing the SMI-S Provider on Linux	4
Linux Testing	5
About SMI-S - Linux	6
Implementation - Linux	7
Indications - Linux	14
SMI-S Interface (Windows)	17
Introduction to the SMI-S Interface	17
Installing the SMI-S WMI Provider on Windows	18
Expected Warning Message	18
Verifying SMI-S Installation on Windows	19
Manual Registration	23
About SMI-S - Windows	24
Implementation - Windows	25
Indications - Windows	31
SMI-S Interface (VMware)	34
Installing the SMI-S Provider on ESXi 5.0	34
Installing the SMI-S Provider on ESX(i) 4.x Using the vCLI	35
Installing the SMI-S Provider on ESX(i) 4.x using the Command-line Interface	35

Interfacing with the SMI-S Provider	35
Using a CIM Browser for SMI-S Management	36
SMI-S Interface Background	36
Description	37
Implementation	38
Indications	44
Setting Up SNMP (Linux)	47
SNMP Master Agent - Linux	47
Launching the SNMP Master Agent	47
Configuring the Master Agent	47
SNMP AgentX Subagent - Linux	48
Installing the SNMP Subagent	48
Running and Configuring the Fusion SNMP Subagent	48
Manually Running the SNMP Subagent	49
Subagent Log File	49
Using the SNMP Sample Config Files - Linux	49
Enabling SNMP Test Mode - Linux	50
SNMP MIB Support - Linux	52
Sample SNMP Monitoring - Linux	54
Setting up SNMP (Windows)	55
SNMP Test Mode and MIB Support	55
Using Test-Mode Registry Values	56
SNMP MIB Support	58
Sample SNMP Monitoring	60


Introduction

The Flash Management Console Tools Guide contains documentation on the following topics:

- Unified command-line utilities
- Remote command-line utilities
- SMI-S interface
- SNMP interface

SMI-S CIM Model

Fusion ioMemory SMI-S CIM Model

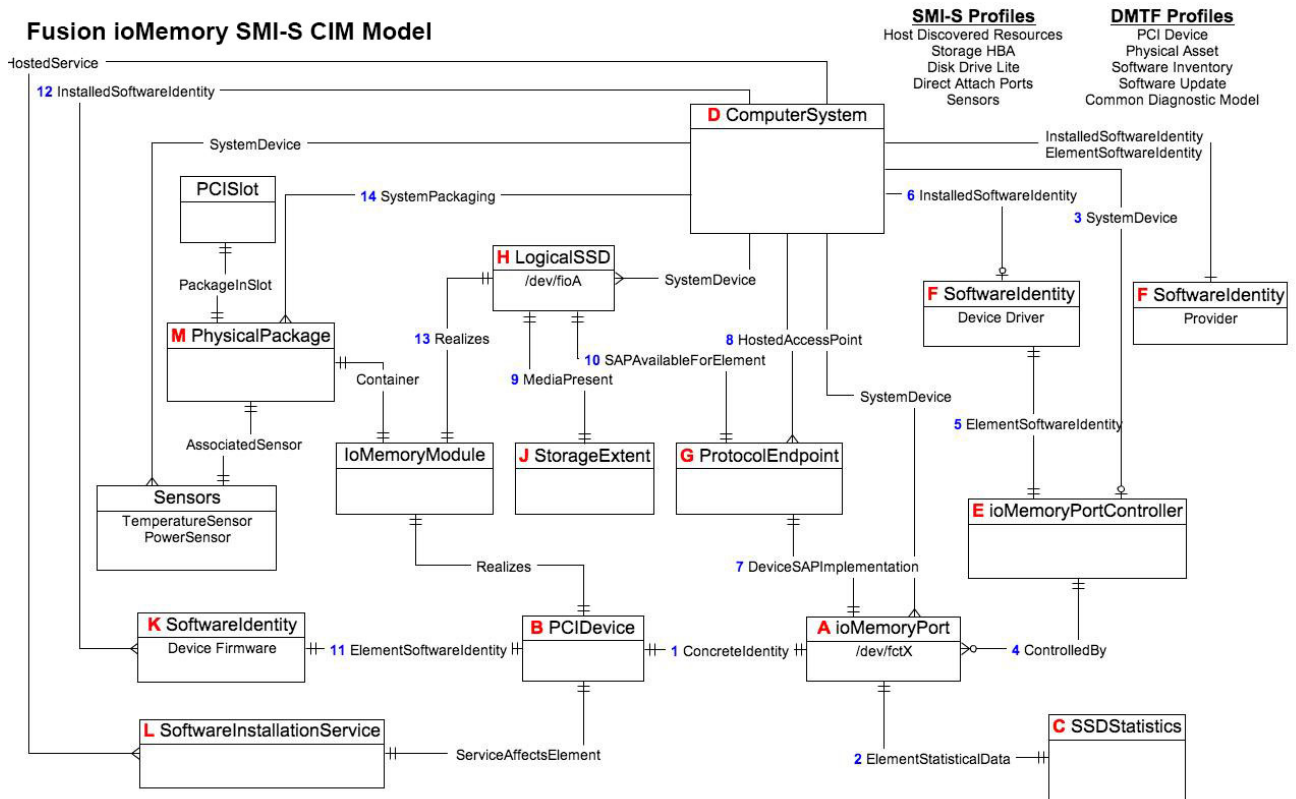

SMI-S Interface (Linux)

Attention!

With High IOPS and io3 Flash Adapter VSL software version 3.x and later, the SMI-S provider has a new CIM namespace: **root/fio**

Introduction to the SMI-S Interface

The SMI-S interface is based on Web-Based Enterprise Management (WBEM) and provides a Common Information Model (CIM) model that represents the High IOPS and io3 Flash Adapter device and associated software, in accordance with existing Distributed Management Task Force (DMTF), Storage Networking Industry Association (SNIA), and Storage Management Initiative Specification (SMI-S) standards. This model permits backward-compatible extension, accommodating new hardware and software features developed by .

References

CIM Schema v2.22

http://www.dmtf.org/standards/cim/cim_schema_v2220

DMTF DSP1011, Physical Asset Profile

http://www.dmtf.org/standards/published_documents/DSP1011_1.0.2.pdf

DMTF DSP1023, Software Inventory Profile

http://www.dmtf.org/standards/published_documents/DSP1023_1.0.1.pdf

DMTF DSP1033, Profile Registration Profile

http://www.dmtf.org/standards/published_documents/DSP1033_1.0.0.pdf

DMTF DSP1075 PCI Device Profile

http://www.dmtf.org/standards/published_documents/DSP1075_1.0.0.pdf

DMTF DSP1002, Diagnostics Profile

http://www.dmtf.org/standards/published_documents/DSP1002_2.0.0.pdf

SMI-S v1.4 Architecture

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Architecture.book_.pdf

SMI-S v1.4 Common Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_CommonProfiles.book_.pdf

SMI-S v1.4 Host Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Host.book_.pdf

SMI-S v1.4 Common Diagnostic Model

<http://www.dmtf.org/standards/mgmt/cdm/>

Installing the SMI-S Provider on Linux

The SMI-S provider implements a standard WBEM interface based on DMTF and SNIA standards for remote management of ioMemory devices. The provider is a CMPI-based provider and should work with popular CIMOMs including SFCB, OpenPegasus, and OpenWBEM. We also have a version that supports WMI on Windows.

In order to use the provider, a CIMOM must be installed and configured. The provider and associated MOF files must then be installed and registered with the CIMOM. The MOF files define the CIM objects available from the SMI-S provider.

Initially, the provider has been tested with SFCB on Linux and WMI on Windows.

1. Install the SFCB CIM broker (CIMOM).
 - Install **sblim-sfcc**, **sblim-sfcc-devel**, **cim-schema-2.21.0**, **sblim-sfcc**, **sblim-indication-helper**, **sblim-cmpi-base** and **sblim-testsuite**

NOTE-

RPMs are available for SLES, RHEL, and others on OpenSUSE Build Service.

2. Configure SFCB: Copy the file (**sfcb.cfg**) to **/etc/sfcb**
3. Install SMI-S provider: Install **fio-smis** package from distribution and copy **/usr/lib/fio/libfiosmis.so** to **/usr/lib/sfcb** (or **/usr/lib64/sfcb** as appropriate).
4. Register the SMI-S provider with SFCB:

```
cd /usr/share/fio/cim

sh /usr/share/sblim-cmpi-base/provider-register.sh -r fiosmis.reg -m
cimv226-dmtf.mof -t sfcb -n root/fio -v
```

5. Restart SFCB:

```
$ /etc/init.d/sblim-sfcc restart
```

Linux Testing

The **wbemcli** utility can be used to test the SMI-S provider.

1. Query the provider for the High IOPS and io3 Flash Adapter VSL software version and the firmware version for each High IOPS and io3 Flash Adapter device in the system:

```
$ wbemcli -nl ei http://localhost:5988/root/cimv2:FIO_SoftwareIdentity
```

The output should look something like this (values may change as development continues):

```
localhost:5988/root/cimv2:FIO_SoftwareIdentity.InstanceID="Fusion-io
drive driver"
-InstanceID="Fusion-io drive driver"
-TargetTypes=
-OtherExtendedResourceTypeDescription=
-MinExtendedResourceTypeRevisionNumber=
. . .
```

2. Query the SMI-S provider for each High IOPS and io3 Flash Adapter device's health:

```
wbemcli -nl ei http://localhost:5988/root/cimv2:FIO_IoMemoryPort
```

The output should look something like this (values may change as development continues):

```
localhost:5988/root/cimv2:FIO_
IoMemoryPort.DeviceID="fct1",CreationClassName="FIO_IoMemoryPort",. . .
```

3. Query capacity and usage counters of a specific ioMemory device (in this case fct0):

```
$ wbemcli -nl gi
http://localhost:5988/root/cimv2:FIO_SSDStatistics.InstanceID="fct0"
```

The output should look something like this (values may change as development continues):

```
localhost:5988/root/cimv2:FIO_SSDStatistics.InstanceID="fct0"
-InstanceID="fct0"
-WriteOperations=0
-ReadOperations=6887
-PhysicalMBytesWritten=1523769
. . .
```

The Linux SMI-S provider can be tested remotely with the **wbemcli** utility by replacing **localhost** in the examples above with the hostname or IP address of the remote host. This method cannot be used to test the Windows SMI-S provider remotely, however, since (of course) Windows doesn't follow the emerging standard.

The SMI-S provider indications can be tested as well.

About SMI-S - Linux

SMI-S is a collection of specifications that traditionally focus on Storage Area Network (SAN) systems based on the SCSI command set, such as Fibre Channel, iSCSI, and SAS. However, the general pattern used to model these storage systems can be applied to solid-state, direct-attached storage systems such as those provided by .

High IOPS and io3 Flash Adapter devices are modeled using the SMI-S patterns established in the Storage HBA, Direct Attached (DA) Ports, and Host Discovered Resources Profiles. The physical aspects of the ioMemory device and all firmware and High IOPS and io3 Flash Adapter VSL software are modeled using published DMTF specifications, including the Physical Asset, Software Inventory, PCI Device Profiles, and Common Diagnostic Model Profile.

See [See SMI-S CIM Model on page 2](#). This chart describes the SMI-S CIM model, with High IOPS and io3 Flash Adapter devices and their associated firmware and software. For simplicity, the prefix FIO_ has been removed from the class names.

A: ioMemoryPort Class

The central instance of the model is of the **IOMemoryPort** class (A in the figure), a logical representation of the ioMemory device. It supports the extrinsic methods necessary to provision the drive. An instance of **PCIDevice** (B) and **IOMemoryPort** exist for each installed ioMemory device, and they are associated with instances of **ConcreteIdentity** (1). An instance of **SSDStatistics** (C), which contains important performance and capacity data for the device, is associated by an **ElementStatisticalData** association (2) to each **IOMemoryPort**. **IOMemoryPort** is scoped by an instance of the **ComputerSystem** class. The **SystemDevice** (3) aggregation aggregates **IOMemoryPort** within the containing **ComputerSystem**.

E: ioMemoryPortController Class

An instance of **IOMemoryPortController** (E) represents the High IOPS and io3 Flash Adapter VSL software used to control the installed High IOPS and io3 Flash Adapter devices.

IOMemoryPortController specializes **CIM_PortController**, and it aggregates **IOMemoryPort** with the **ControlledBy** (4) aggregation. The software version and vendor information are represented by the **SoftwareIdentity** (F) instance that is associated to **IOMemoryPortController** (E) via **ElementSoftwareIdentity** (5). The **SoftwareIdentity** that represents the installed High IOPS and io3 Flash Adapter VSL software is associated to the scoping **ComputerSystem** using the **InstalledSoftwareIdentity** association (6).

An instance of the **ProtocolEndpoint** class (G) represents both ends of the logical data path between the **IOMemoryPort** and the solid-state storage. This aspect of the model is derived from the pattern in the DA Ports Profile, where the port is both an initiator and target. **ProtocolEndpoint** is associated to the **IOMemoryPort** by **DeviceSAPImplementation** (7) and to the **ComputerSystem** by **HostedAccessPoint** (8).

H: LogicalSSD Class (Block Device)

The block device exposed to applications (file systems, database, and logical volume manager) is modeled using an instance of **LogicalSSD** (H), a subclass of **CIM_DiskDrive**. It is associated with a **StorageExtent** (J) using the **MediaPresent** association (9), but the **StorageExtent** will always be present. It is also associated to the **ProtocolEndpoint** (G) representing the **IOMemoryPort** using **SAPAvailableForElement** (10) and to the scoping **ComputerSystem** using **SystemDevice** (3).

High IOPS and io3 Flash Adapter devices, being PCIe devices, are also represented by an instance of the **PCIDevice** class (B). **IOMemoryPort** is an alternate representation of the **PCIDevice** and its associated control device. It is associated to it by the **ConcreteIdentity** association.

K: SoftwareIdentity

The High IOPS and io3 Flash Adapter VSL software is also represented with **SoftwareIdentity**, which is associated to the **PCIDevice** by the **ElementSoftwareIdentity** association (11). The **SoftwareIdentity** (firmware) is associated to the scoping **ComputerSystem** by the **InstalledSoftwareIdentity** association (12). An instance of **SoftwareInstallationService** (L) is associated with each **PCIDevice**, which can be used to update device firmware.

M: PhysicalPackage

The physical aspects of High IOPS and io3 Flash Adapter devices are represented by an instance of the **PhysicalPackage** class (M), that is associated to the **PCIDevice** by **Realizes** (13) and to the scoping **ComputerSystem** by **SystemPackaging** (14). The temperature sensors on High IOPS and io3 Flash Adapter devices are represented by an instance of **TemperatureSensor** (N) and is associated to the **PhysicalPackage** by **AssociatedSensor**.

Implementation - Linux

This section describes the arrangement of instances and associations for the device CIM model. Not all class properties are described in detail. Consult the CIM schema for detailed description of all properties.

The device health is indicated by the value of the **HealthLevel** property. Values include: Healthy, Warning, Reduced Write, and Read Only. These values are mapped to **standardHealthState** values – OK, Degraded/Warning, and Critical Failure – as appropriate.

Extrinsic methods for device provisioning include attach, detach, format, and update. The attach method creates a block device for the High IOPS and io3 Flash Adapter device. Detach disables the block device. A format option enables users to specify the device size in either megabytes or a percentage. The update method allows users to upgrade the firmware on the device.

Device longevity is indicated by the value of the **HealthPercentage** property. **FlashbackAvailability** indicates whether or not this feature of the High IOPS and io3 Flash Adapter device is online.

IOMemoryPorts are aggregated by **IOMemoryPortController** via the **ControlledBy** aggregation. Instances of **IOMemoryPort** are associated to their corresponding **PCIDevice** with the **ConcreteIdentity** association. The **IOMemoryPort** is a logical device of the scoping **ComputerSystem** and is indicated as such by the **SystemDevice** aggregation.

Products with two or more High IOPS and io3 Flash Adapter devices, such as the High IOPS Duo Adapter do appear like two separate High IOPS and io3 Flash Adapter devices. For products with multiple devices, the **IOMemoryPort** class is extended to include information about the carrier card type, serial number, and external power connection for the product as a whole.

IOMemoryPort

One instance of **IOMemoryPort** exists for each High IOPS and io3 Flash Adapter device installed in the **ComputerSystem**.

The **LocationIndicator** property reflects the state of the device indicator beacon (e.g., all LEDs on solid). Reading the value gives the current state of the indicator. Writing the value with "On" or "Off" turns the indicator on or off and can be used to determine the device's physical location.

SSDStatistics

One instance of **SSDStatistics** exists for each **IOMemoryPort** instance. Properties of this object provide performance and capacity information. Some of this information is only available when the drive is attached (i.e., the state of the associated **IOMemoryPort** is "Attached").

IOMemoryPortController

Only one instance of **IOMemoryPortController** exists, representing the High IOPS and io3 Flash Adapter VSL software used to control **IOMemoryPorts**. The **IOMemoryPortController** specializes the **CIM_PortController**. **IOMemoryPortController** is aggregated to the scoping **ComputerSystem** using the **SystemDevice** aggregation. **IOMemoryPortController** is associated with a **SoftwareInventory** instance representing the High IOPS and io3 Flash Adapter VSL software properties via the **ElementSoftwareIdentity** association.

ProtocolEndpoint

One instance of **ProtocolEndpoint** exists for each instance of **IOMemoryPort**. It is associated to the **IOMemoryPort** using **DeviceSAPImplementation** and to **LogicalSSD** using **SAPAvailableForElement**. Because an **IOMemoryPort** represents both the initiator and target ports, only one **ProtocolEndpoint** per **IOMemoryPort** is needed to model the connection between **IOMemoryPort** and **LogicalSSD**.

LogicalSSD

One instance of **LogicalSSD**, a subclass of **CIM_DiskDrive**, exists for each block device (**/dev/fioX**) exposed by an High IOPS and io3 Flash Adapter device. Correlatable IDs are used, based on operating system device names. This enables client applications to associate block devices discovered through this model with resources discovered from other SMI-S models instrumented on the host system.

ComputerSystem aggregates **LogicalSSDs** via **SystemDevice**. The **LogicalSSD** instances are associated to their **ProtocolEndpoints** via **SAPAvailableForElement**. If the **IOMemoryPort** associated to the endpoint is not attached, then the Availability property is set to "Off Line," and the **DeviceID** property value is "Unknown."

StorageExtent

One instance of **StorageExtent** is associated with each **LogicalSSD** and represents the logical storage of the associated device.

SoftwareIdentity

One instance of **SoftwareIdentity** exists to represent the High IOPS and io3 Flash Adapter VSL software. The firmware is also modeled using **SoftwareIdentity** but requires an instance for each High IOPS and io3 Flash Adapter device installed. The **IsEntity** property has a value of True, indicating that the **SoftwareIdentity** instance corresponds to a discrete copy of the High IOPS and io3 Flash Adapter VSL software or firmware. The **MajorVersion**, **MinorVersion**, **RevisionNumber**, and

BuildNumber properties convey the driver/firmware version information. The **Manufacturer** property can be used to identify IBM.

Another option for the firmware is to omit the **InstalledSoftwareIdentity** association with **ComputerSystem**, because the firmware is not really installed on **ComputerSystem**. This option would depend on how users want to model the firmware.

SoftwareInstallationService

An instance of **SoftwareInstallationService** exists for each **PCIDevice** and can be used to update the associated device's firmware.

PCIDevice

An instance of **PCIDevice** is instantiated for each High IOPS and io3 Flash Adapter device (PCIe card) in the computer. Properties are set as follows:

- **BusNumber** – bus number where the PCIe device exists
- **DeviceNumber** – device number assigned to the PCI device for this bus.
- **FunctionNumber** – set to the function number for the PCI device.
- **SubsystemID**, **SubsystemVendorID**, **PCIDeviceID**, **VendorID**, and **RevisionID** are optional but can be populated if values can be extracted from the configuration registers of the PCI device.

PCIDevice is associated with **IOMemoryPort**, its alternate logical representation, using **ConcreteIdentity**. The **PCIDevice** is also associated with **PhysicalPackage**, representing the physical aspects of the High IOPS and io3 Flash Adapter device, via **Realizes**.

PhysicalPackage

One instance of **PhysicalPackage** exists for each discrete, physical High IOPS and io3 Flash Adapter device installed in the computer system. The **Manufacturer**, **Model**, **SKU**, **SerialNumber**, **Version**, and **PartNumber** properties can be used to describe these aspects of the physical card. **PhysicalPackage** is associated with **PCIDevice** via **Realizes** and the scoping **ComputerSystem** via **SystemPackaging**.

TemperatureSensor

One instance of **TemperatureSensor** exists for each **PhysicalPackage**. Temperature information for the drive is stored in the properties of this object.

Diagnostic Test

One instance of **DiagnosticTest** will exist. The **RunDiagnostic()** method will trigger a snapshot of device status for the specified **ManagedElement** which must be an instance of **IoMemoryPort**. The diagnostic run is synchronous and runs instantaneously. The resulting **ConcreteJob** object will associate to the originating **DiagnosticTest** instance and the respective **IoMemoryPort** instance that was specified (see [See SMI-S CIM Model on page 2](#)). At this time, **RunDiagnostic()** can only be used with the default **DiagnosticSettingData** provided.

Each run will add a single entry of **DiagnosticSettingDataRecord** and associated **DiagnosticCompletionRecord** in the **DiagnosticLog**. The **RecordData** property of the

DiagnosticCompletionRecord will record critical device status at the time of the run. The format of the **RecordData** string can be found in the **RecordFormat** property.

The format is a series of status strings, each of which can hold one of the following values delimited by an asterisk (*) character: *Unknown*, *OK*, *Warning*, or *Error*. Currently, seven status values are recorded: *WearoutStatus*, *WritabilityStatus*, *FlashbackStatus*, *TemperatureStatus*, *MinimalModeStatus*, *PciStatus* and *InternalErrorStatus*. All of these should report *OK* under normal operating conditions.

WearoutStatus will be set to *Warning* when less than 10% reserve space is left on the device. It will be set to *Error* when there is no more reserved space.

WritabilityStatus will be set to *Error* whenever the device is write throttling or in read-only mode. This can happen due to a variety of conditions including device wearout and insufficient power. The warnings and errors are:

- **FlashbackStatus** will report *Warning* if a catastrophic error causes Flashback protection to be degraded.
- **TemperatureStatus** will report *Warning* when the device temperature is nearing the maximum safe temperature and *Error* when the maximum safe temperature is reached or surpassed.
- **MinimalModeStatus** will report either *Warning* or *Error* whenever the device is in minimal mode.
- **PciStatus** will report *Warning* or *Error* if there are compatibility problems with the host PCIe bus.
- **InternalErrorStatus** will report *Error* if there are any internal problems with the ioMemory VSL software.

The **CompletionState** property will summarize the results and may be set to *Unknown*, *OK*, *Warning* or *Failed*. If any status is in error, the state will report as *Failed*. Otherwise, if there is any warning status, the state will report *Warning*. The **Message** property will be set to indicate the appropriate action if there are any warnings or errors.

DiagnosticSetting Data

There is an instance of **DiagnosticSettingData** associated with the **DiagnosticTest** instance (see [See SMI-S CIM Model on page 2](#)). It records the default settings for each call to **RunDiagnostic**.

DiagnosticServiceCapabilities

There is an instance of **DiagnosticServiceCapabilities** associated with the **DiagnosticTest** instance that records the capabilities of the **DiagnosticTest** service.

DiagnosticLog

An instance of **DiagnosticLog** is associated with the **DiagnosticTest** instance and stores the results of each run.

DiagnosticSettingRecord

A copy of the default **DiagnosticSettingData** is stored in a **DiagnosticSettingDataRecord** each time a diagnostic is run and is associated with an instance of **DiagnosticCompletionRecord**.

DiagnosticCompletionRecord

An instance of **DiagnosticCompletionRecord** stores the results of each **RunDiagnostic** execution. The details are explained in **DiagnosticTest**.

RegisteredDiskDriveLiteProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Disk Drive Lite Profile. The following properties are set as follows:

- **InstanceID** – set to *SNIA:DiskDriveLiteProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredDAPortsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the DA Ports Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:DAPortsProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredStorageHBAProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Storage HBA Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:StorageHBAProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Storage HBA Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredHostDiscoveredResourcesProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Host Discovered Resources Profile. The properties are set as follows:

InstanceID – set to *SNIA:HostDiscoveredResourcesProfile-1.2.0*

RegisteredOrganization – set to "11" (SNIA)

RegisteredName – set to *Host Discovered Resources Profile*

RegisteredVersion – set to "1.2.0"

RegisteredPCIDeviceProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the PCI Device Profile. The properties are set as follows:

InstanceID – set to *DMTF:DSP1075-PCIDevice-1.0.0a*

RegisteredOrganization – set to "2" (DMTF)

RegisteredName – set to *PCIDevice Profile*

RegisteredVersion – set to "1.0.0a"

RegisteredSoftwareInventoryProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Inventory Profile. The properties are set as follows:

InstanceID – set to *DMTF:DSP1023-SoftwareInventory-1.0.1*

RegisteredOrganization – set to "2" (DMTF)

RegisteredName – set to *Software Inventory Profile*

RegisteredVersion – set to "1.0.1"

RegisteredSoftwareUpdateProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Update Profile. The properties are set as follows:

InstanceID – set to *DMTF:DSP1023-SoftwareUpdate-1.0.0*

RegisteredOrganization – set to "2" (DMTF)

RegisteredName – set to *Software Update Profile*

RegisteredVersion – set to "1.0.0"

RegisteredPhysicalAssetProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Physical Asset Profile. The properties are set as follows:

InstanceID – set to *DMTF:PhysicalAssetProfile-1.0.2*

RegisteredOrganization – set to "2" (DMTF)

RegisteredName – set to *PhysicalAsset Profile*

RegisteredVersion – set to "1.0.2"

RegisteredSensorsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Sensors Profile. The properties are set as follows:

InstanceID – set to *SNIA:SensorsProfile-1.0.0*

RegisteredOrganization – set to "11" (SNIA)

RegisteredName – set to *Sensors Profile*

RegisteredVersion – set to "1.0.0"

RegisteredCommonDiagnosticProfile

Only one instance of this class is needed. It will reside in the **/root/interop** namespace and indicate the implementation of the Common Diagnostic Model Profile. The **InstanceID** property will be set to a value of *DMTF:DiagnosticsProfile-2.0.0a*. The **RegisteredOrganization** property will be set to a value of "2" (DMTF). The **RegisteredName** property will be set to a value of *Diagnostics Profile*. The **RegisteredVersion** property will be set to a value of "2.0.0a".

Indications - Linux

An indication is generated periodically when a serious condition exists for particular High IOPS and io3 Flash Adapter. The WBEM provider currently supports six types of indications. They alert users of the SMI-S provider to conditions such as imminent wearout, degradation of writability, degradation of the flashback feature, higher temperature, and internal error states.

The indications will be instances of the **FIO_AlertIndication** class that simply specializes the **CIM_AlertIndication** class.

FIO_AlertIndication

Property	Value
IndicationIdentifier	See below for each type
IndicationTime	Timestamp when sent
AlertingManagedElement	IoMemoryPort.DeviceID=<device ID>
AlertingElementFormat	CIMObjectPath (2)
AlertType	Device Alert (5)
PerceivedSeverity	See below for each type
ProbableCause	See below for each type
SystemCreationClassName	"FIO_AlertIndication"
SystemName	<hostname>
ProviderName	"fiosmis"
CorrelatedIndications	Not used
Description	Class description
OtherAlertType	Not used
OtherSeverity	Not used
ProbableCauseDescription	Not used
EventID	Same as IndicationIdentifier
OwningEntity	<vendor>
MessageID	Not used
Message	Not used
MessageArguments	Not used

Reduced Writability Indication

The High IOPS and io3 Flash Adapter VSL software can dramatically reduce write throughput to manage device conditions such as excessive wear, high temperature, and insufficient power. The reduced writability indication is generated while the drive is in this mode. If the triggering condition is excessive wear, the **IoMemoryPort** health percentage will report 0% health.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":write"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)
	Temperature Unacceptable (51)
	Power Problem (36)

Read-only Indication

When the drive has reached the end-of-life, it can no longer be written to and can only be read from. The read-only indication will be sent when this occurs. The **IoMemoryPort** health percentage will continue to report 0% health when this happens.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":read_only"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Wearout Indication

As the drive wears out, this indication is generated as a warning when the drive health percentage drops below 10%, before write throughput is reduced.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":wearout"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Flashback Indication

If a catastrophic part failure degrades the effectiveness of the flashback feature, this indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":flashback"

Property	Value
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Loss of Redundancy (88)

High Temperature Indication

This indication will be sent when the temperature of the card becomes excessive.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":temperature"
PerceivedSeverity	Critical (6)
ProbableCause	Temperature Unacceptable (51)

Error Indication

If the High IOPS and io3 Flash Adapter VSL software is in an error state the error indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":error"
PerceivedSeverity	Major (6)
ProbableCause	Other (1)

SMI-S Interface (Windows)

Attention!

With High IOPS and io3 Flash Adapter VSL software version 3.x and later, the SMI-S provider has a new CIM namespace: **root/fio**

Introduction to the SMI-S Interface

The SMI-S interface is based on Web-Based Enterprise Management (WBEM) and provides a Common Information Model (CIM) model that represents the ioMemory device and associated software, in accordance with existing Distributed Management Task Force (DMTF) and Storage Networking Industry Association (SNIA) Storage Management Initiative Specification (SMI-S) standards. This model permits backward-compatible extension, accommodating new hardware and software features developed by IBM.

References

CIM Schema v2.22

http://www.dmtf.org/standards/cim/cim_schema_v2220

DMTF DSP1011, Physical Asset Profile

http://www.dmtf.org/standards/published_documents/DSP1011_1.0.2.pdf

DMTF DSP1023, Software Inventory Profile

http://www.dmtf.org/standards/published_documents/DSP1023_1.0.1.pdf

DMTF DSP1033, Profile Registration Profile

http://www.dmtf.org/standards/published_documents/DSP1033_1.0.0.pdf

DMTF DSP1075 PCI Device Profile

http://www.dmtf.org/standards/published_documents/DSP1075_1.0.0.pdf

DMTF DSP1002, Diagnostics Profile

http://www.dmtf.org/standards/published_documents/DSP1002_2.0.0.pdf

SMI-S v1.4 Architecture

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Architecture.book.pdf

SMI-S v1.4 Common Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_CommonProfiles.book.pdf

SMI-S v1.4 Host Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Host.book.pdf

SMI-S v1.4 Common Diagnostic Model

<http://www.dmtf.org/standards/mgmt/cdm/>

Installing the SMI-S WMI Provider on Windows

To install the SMI-S WMI provider on Windows:

1. Go to **Control Panel > Add & Remove Programs**.
2. Right-click **Management and Monitoring Tools** and select **Details**. Make sure the WMI Windows Installer Provider is selected.

The SMI-S WMI provider for High IOPS and io3 Flash Adapter devices will be installed and the WMI service will be restarted automatically.

Expected Warning Message

When you install the WMI provider, a warning will appear in the Windows event log with the following description:


A provider, fio-smis-wmi, has been registered in the Windows Management Instrumentation namespace root\fio to use the LocalSystem account. This account is privileged and the provider may cause a security violation if it does not correctly impersonate user requests.

This warning is expected. The WMI provider only interfaces with the High IOPS and io3 Flash Adapter VSL software and does not modify system data.


Verifying SMI-S Installation on Windows

To verify the SMI-S WMI provider on Windows:

1. Run the **wbemtest.exe** program. The WMI Tester window appears.

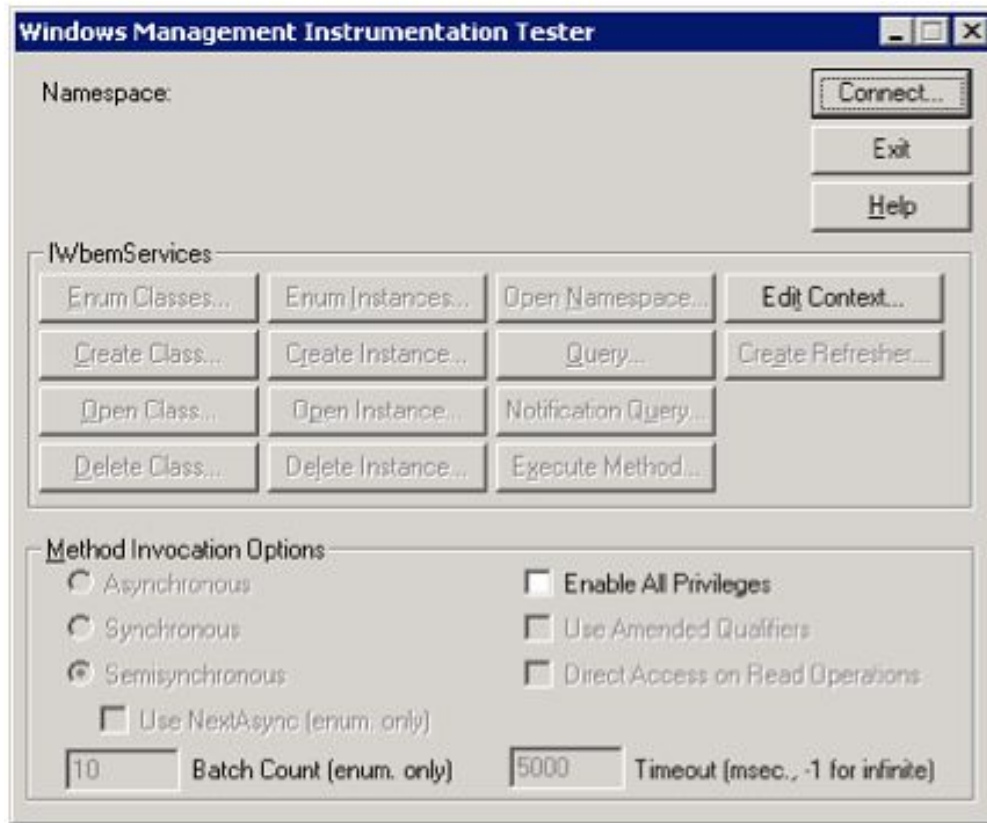


2. Click **Connect** to display the Connect dialog. The CIM provider namespace is **root\firmware**.

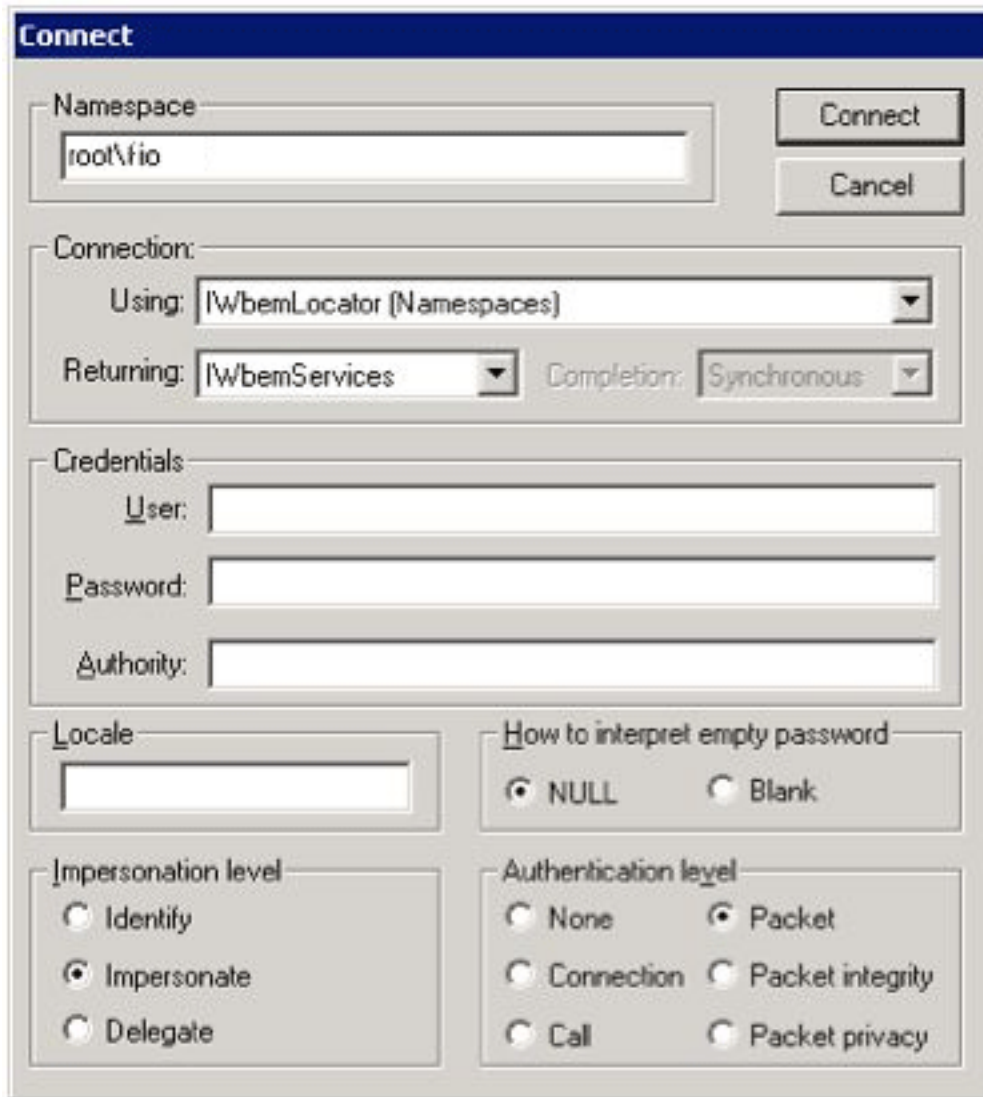
A screenshot of a 'Connect' dialog box. The dialog has a title bar 'Connect' in a blue bar. Below the title bar, there are several sections. The first section is 'Namespace' with a text box containing 'root\rfio' and two buttons 'Connect' and 'Cancel'. The second section is 'Connection:' with a 'Using:' dropdown set to 'I/wbemLocator (Namespaces)', a 'Returning:' dropdown set to 'I/wbemServices', and a 'Completion:' dropdown set to 'Synchronous'. The third section is 'Credentials' with three text boxes labeled 'User:', 'Password:', and 'Authority:'. The fourth section is 'Locale' with a text box. The fifth section is 'How to interpret empty password' with two radio buttons: 'NULL' (selected) and 'Blank'. The sixth section is 'Impersonation level' with three radio buttons: 'Identify', 'Impersonate' (selected), and 'Delegate'. The seventh section is 'Authentication level' with six radio buttons: 'None', 'Packet' (selected), 'Connection', 'Packet integrity', 'Call', and 'Packet privacy'.

3. Type the namespace value shown in the screenshot above and click **Connect**.

The WMI Tester window appears, with the namespace value filled in.

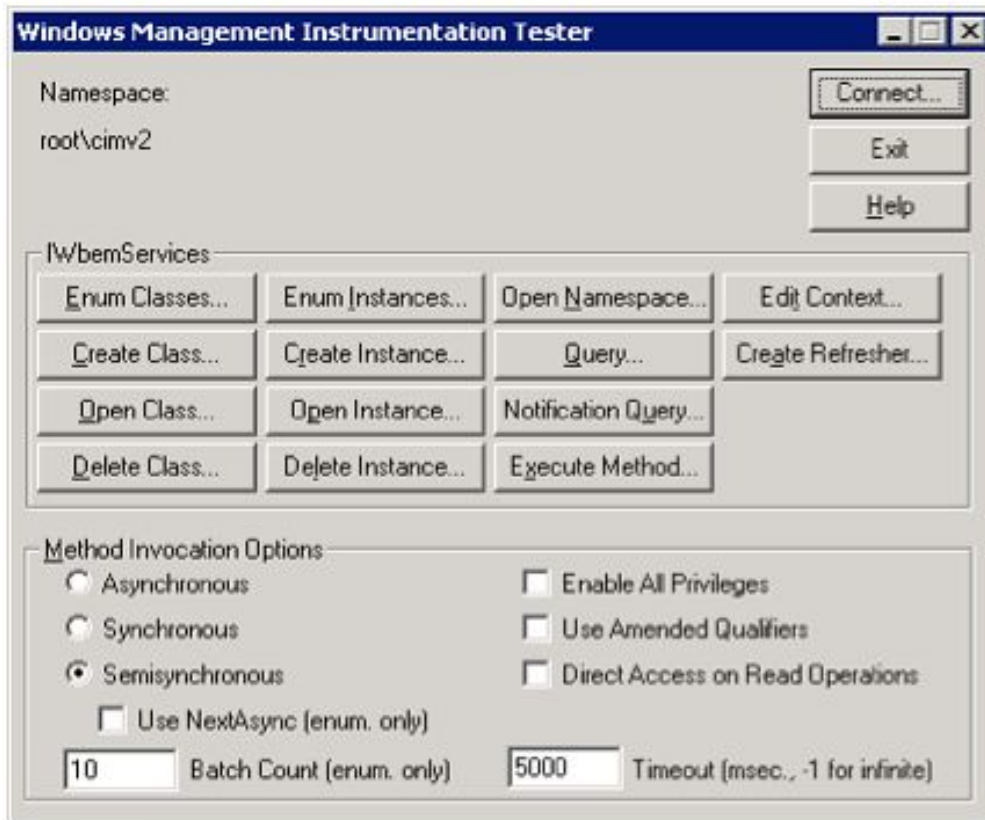


4. Click Enum Instances (second button on the first row) to bring up the **Class Info** dialog.

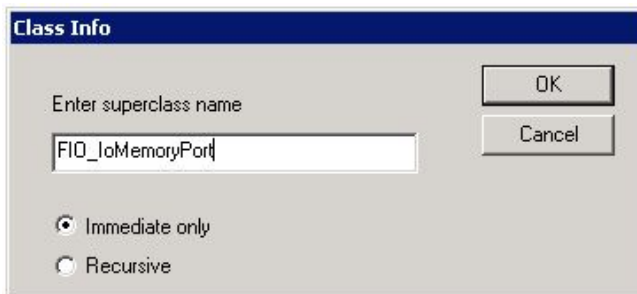


5. Type FIO_IoMemoryPort as shown above and then click **OK**.

If the provider is installed correctly, the result will look like the following example, with an entry for each High IOPS and io3 Flash Adapter device in the system:

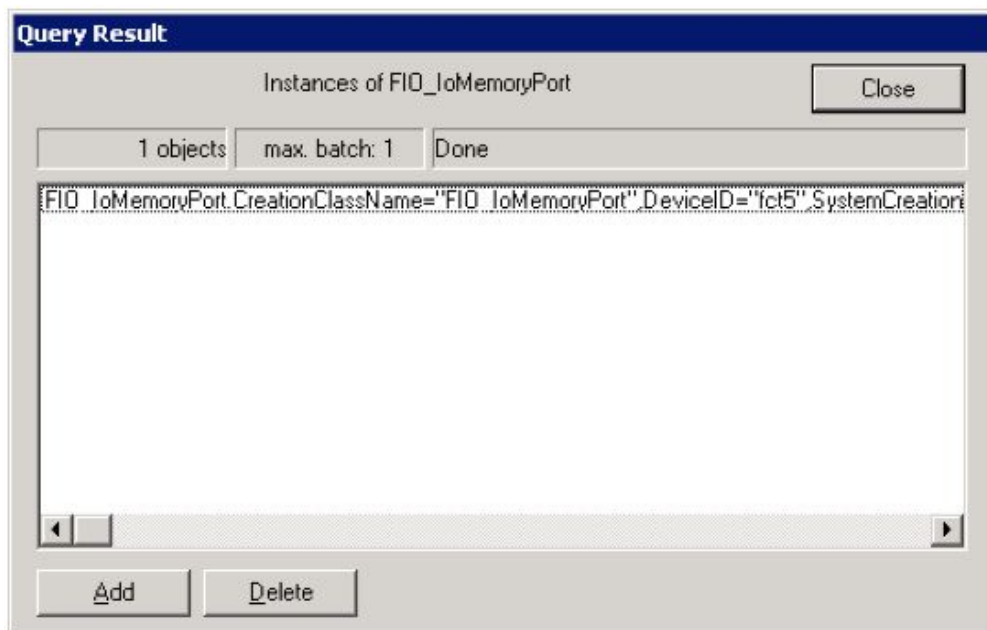

6. Double-click an entry to bring up detailed information, such as in this example:

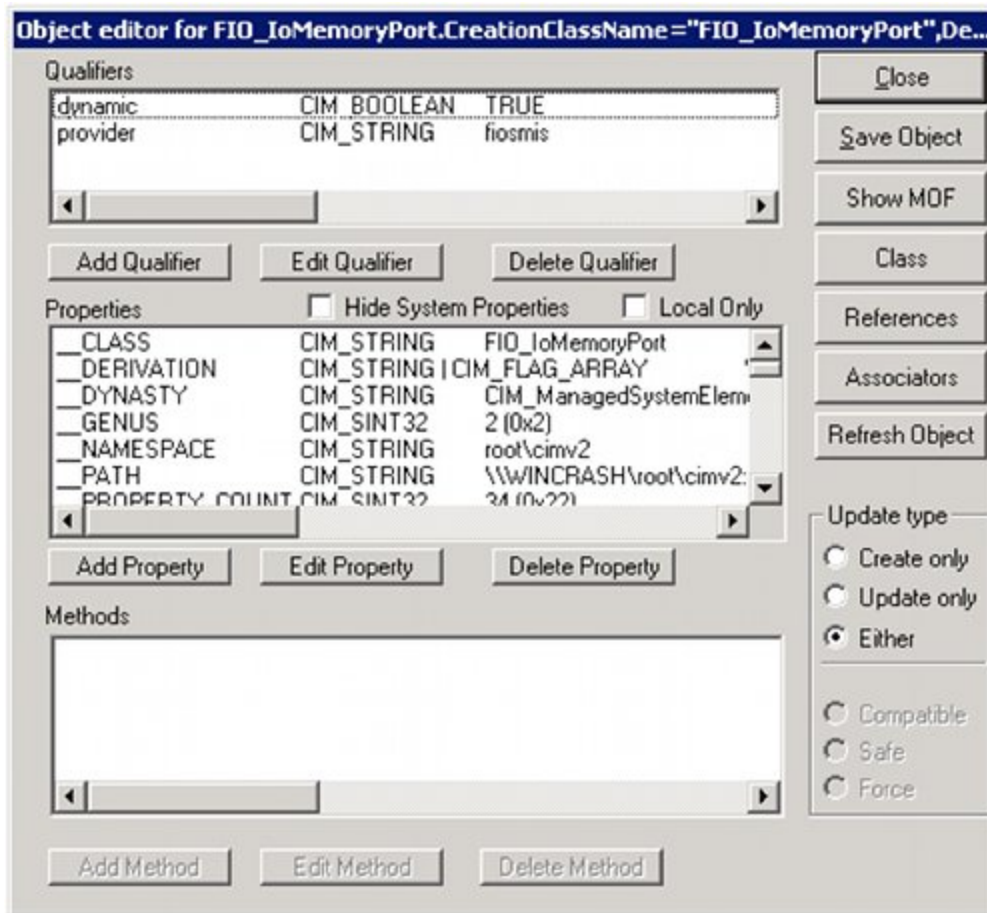

Manual Registration

If the automatic installation fails to register the provider, follow these steps to manually register it:

1. Stop the WMI (winmgmt) service via the services tool or the following command line:

```
net stop winmgmt
```

2. Browse to the **Fusion-io\SMIS\cim-schema** directory using the command-line interface and run the following:

```
mofcomp fio-reg-wmi.mof
```

3. Browse to **Fusion-io\SMIS\WMI** directory
4. Un-register and re-register the **fio-smis-wmi.dll** using the following commands:

```
regsvr32 /u fio-smis-wmi.dll
```

```
regsvr32 fio-smis-wmi.dll
```

5. Start the winmgmt service via the services tool or the following command line:

```
net start winmgmt
```

About SMI-S - Windows

SMI-S is a collection of specifications that traditionally focus on Storage Area Network (SAN) systems based on the SCSI command set, such as Fibre Channel, iSCSI, and SAS. However, the general pattern used to model these storage systems can be applied to solid-state, direct-attached storage systems such as those provided by .

High IOPS and io3 Flash Adapter devices are modeled using the SMI-S patterns established in the Storage HBA, Direct Attached (DA) Ports, and Host Discovered Resources Profiles. The physical aspects of the High IOPS and io3 Flash Adapter device and all firmware and High IOPS and io3 Flash Adapter VSL software are modeled using published DMTF specifications, including the Physical Asset, Software Inventory, PCI Device Profiles, and Common Diagnostic Model Profile.

See [See SMI-S CIM Model on page 2](#). This chart describes the SMI-S CIM model, with High IOPS and io3 Flash Adapter devices and their associated firmware and software. For simplicity, the prefix FIO_ has been removed from the class names.

A: iOMemoryPort Class

The central instance of the model is of the **IOMemoryPort** class (A in the figure), a logical representation of the High IOPS and io3 Flash Adapter device. It supports the extrinsic methods necessary to provision the drive. An instance of **PCIDevice** (B) and **IOMemoryPort** exist for each installed High IOPS and io3 Flash Adapter device, and they are associated with instances of **ConcreteIdentity** (1). An instance of **SSDStatistics** (C), which contains important performance and capacity data for the device, is associated by an **ElementStatisticalData** association (2) to each **IOMemoryPort**. **IOMemoryPort** is scoped by an instance of the **ComputerSystem** class. The **SystemDevice** (3) aggregation aggregates **IOMemoryPort** within the containing **ComputerSystem**.

E: iOMemoryPortController Class

An instance of **IOMemoryPortController** (E) represents the High IOPS and io3 Flash Adapter VSL software used to control the installed High IOPS and io3 Flash Adapter devices.

IOMemoryPortController specializes **CIM_PortController**, and it aggregates **IOMemoryPort** with the **ControlledBy** (4) aggregation. The software version and vendor information are represented by the **SoftwareIdentity** (F) instance that is associated to **IOMemoryPortController** (E) via **ElementSoftwareIdentity** (5). The **SoftwareIdentity** that represents the installed ioMemory VSL software is associated to the scoping **ComputerSystem** using the **InstalledSoftwareIdentity** association (6).

An instance of the **ProtocolEndpoint** class (G) represents both ends of the logical data path between the **IOMemoryPort** and the solid-state storage. This aspect of the model is derived from the pattern in the DA Ports Profile, where the port is both an initiator and target. **ProtocolEndpoint** is associated to the **IOMemoryPort** by **DeviceSAPImplementation** (7) and to the **ComputerSystem** by **HostedAccessPoint** (8).

H: LogicalSSD Class (Block Device)

The block device exposed to applications (file systems, database, and logical volume manager) is modeled using an instance of **LogicalSSD** (H), a subclass of **CIM_DiskDrive**. It is associated with a **StorageExtent** (J) using the **MediaPresent** association (9), but the **StorageExtent** will always be present. It is also associated to the **ProtocolEndpoint** (G) representing the **IOMemoryPort** using **SAPAvailableForElement** (10) and to the scoping **ComputerSystem** using **SystemDevice** (3).

High IOPS and io3 Flash Adapter devices, being PCIe devices, are also represented by an instance of the **PCIDevice** class (B). **IOMemoryPort** is an alternate representation of the **PCIDevice** and its associated control device. It is associated to it by the **ConcreteIdentity** association.

K: SoftwareIdentity

The High IOPS and io3 Flash Adapter VSL software is also represented with **SoftwareIdentity**, which is associated to the **PCIDevice** by the **ElementSoftwareIdentity** association (11). The **SoftwareIdentity** (firmware) is associated to the scoping **ComputerSystem** by the **InstalledSoftwareIdentity** association (12). An instance of **SoftwareInstallationService** (L) is associated with each **PCIDevice**, which can be used to update device firmware.

M: PhysicalPackage

The physical aspects of High IOPS and io3 Flash Adapter devices are represented by an instance of the **PhysicalPackage** class (M), which is associated to the **PCIDevice** by **Realizes** (13) and to the scoping **ComputerSystem** by **SystemPackaging** (14). The temperature sensors on High IOPS and io3 Flash Adapter devices are represented by an instance of **TemperatureSensor** (N) and is associated to the **PhysicalPackage** by **AssociatedSensor**.

Implementation - Windows

This section describes the arrangement of instances and associations for the device CIM model. Not all class properties are described in detail. Consult the CIM schema for detailed description of all properties.

The device health is indicated by the value of the **HealthLevel** property. Values include: *Healthy*, *Warning*, *Reduced Write*, and *Read Only*. These values are mapped to **standardHealthState** values – *OK*, *Degraded/Warning*, and *Critical Failure* – as appropriate.

Extrinsic methods for device provisioning include attach, detach, format, and update. The attach method creates a block device for the High IOPS and io3 Flash Adapter device. Detach disables the block device. A format option enables users to specify the device size in either megabytes or a percentage. The update method allows users to upgrade the firmware on the device.

Device longevity is indicated by the value of the **HealthPercentage** property. **FlashbackAvailability** indicates whether or not this feature of the High IOPS and io3 Flash Adapter device is online. **IOMemoryPorts** are aggregated by **IOMemoryPortController** via the **ControlledBy** aggregation. Instances of **IOMemoryPort** are associated to their corresponding **PCIDevice** with the **ConcreteIdentity** association. The **IOMemoryPort** is a logical device of the scoping **ComputerSystem** and is indicated as such by the **SystemDevice** aggregation.

Products with two or more High IOPS and io3 Flash Adapter devices, such as the Legacy High IOPS Adapter do appear like two separate High IOPS and io3 Flash Adapter devices. For products with multiple

devices, the **IOMemoryPort** class is extended to include information about the carrier card type, serial number, and external power connection for the product as a whole.

IOMemoryPort

One instance of **IOMemoryPort** exists for each High IOPS and io3 Flash Adapter device installed in the **ComputerSystem**.

The **LocationIndicator** property reflects the state of the device indicator beacon (e.g., all LEDs on solid). Reading the value gives the current state of the indicator. Writing the value with "On" or "Off" turns the indicator on or off and can be used to determine the device's physical location.

SSDStatistics

One instance of **SSDStatistics** exists for each **IOMemoryPort** instance. Properties of this object provide performance and capacity information. Some of this information is only available when the drive is attached (i.e., the state of the associated **IOMemoryPort** is "Attached").

IOMemoryPortController

Only one instance of **IOMemoryPortController** exists, representing the High IOPS and io3 Flash Adapter VSL software used to control **IOMemoryPorts**. The **IOMemoryPortController** specializes the **CIM_PortController**.

IOMemoryPortController is aggregated to the scoping **ComputerSystem** using the **SystemDevice** aggregation. **IOMemoryPortController** is associated with a **SoftwareInventory** instance representing the High IOPS and io3 Flash Adapter VSL software properties via the **ElementSoftwareIdentity** association.

ProtocolEndpoint

One instance of **ProtocolEndpoint** exists for each instance of **IOMemoryPort**. It is associated to the **IOMemoryPort** using **DeviceSAPImplementation** and to **LogicalSSD** using **SAPAvailableForElement**. Because an **IOMemoryPort** represents both the initiator and target ports, only one **ProtocolEndpoint** per **IOMemoryPort** is needed to model the connection between **IOMemoryPort** and **LogicalSSD**.

LogicalSSD

One instance of **LogicalSSD**, a subclass of **CIM_DiskDrive**, exists for each block device (**/dev/fioX**) exposed by an High IOPS and io3 Flash Adapter device. **Correlatable IDs** are used, based on operating system device names. This enables client applications to associate block devices discovered through this model with resources discovered from other SMI-S models instrumented on the host system.

ComputerSystem aggregates **LogicalSSDs** via **SystemDevice**. The **LogicalSSD** instances are associated to their **ProtocolEndpoints** via **SAPAvailableForElement**. If the **IOMemoryPort** associated to the endpoint is not attached, then the **Availability** property is set to "Off Line," and the **DeviceID** property value is "Unknown."

StorageExtent

One instance of **StorageExtent** is associated with each **LogicalSSD** and represents the logical storage of the associated device.

SoftwareIdentity

One instance of **SoftwareIdentity** exists to represent the High IOPS and io3 Flash Adapter VSL software. The firmware is also modeled using **SoftwareIdentity** but requires an instance for each High IOPS and io3 Flash Adapter device installed. The **IsEntity** property has a value of *True*, indicating that the **SoftwareIdentity** instance corresponds to a discrete copy of the High IOPS and io3 Flash Adapter VSL software or firmware. The **MajorVersion**, **MinorVersion**, **RevisionNumber**, and **BuildNumber** properties convey the driver/firmware version information. The **Manufacturer** property can be used to identify IBM.

Another option for the firmware is to omit the **InstalledSoftwareIdentity** association with **ComputerSystem**, because the firmware is not really installed on **ComputerSystem**. This option would depend on how users want to model the firmware.

SoftwareInstallationService

An instance of **SoftwareInstallationService** exists for each **PCIDevice** and can be used to update the associated device's firmware.

PCIDevice

An instance of **PCIDevice** is instantiated for each High IOPS and io3 Flash Adapter device (PCIe card) in the computer. Properties are set as follows:

- **BusNumber** – bus number where the PCIe device exists
- **DeviceNumber** – device number assigned to the PCI device for this bus.
- **FunctionNumber** – set to the function number for the PCI device.
- **SubsystemID**, **SubsystemVendorID**, **PCIDeviceID**, **VendorID**, and **RevisionID** are optional but can be populated if values can be extracted from the configuration registers of the PCI device.

PCIDevice is associated with **IOMemoryPort**, its alternate logical representation, using **ConcreteIdentity**. The **PCIDevice** is also associated with **PhysicalPackage**, representing the physical aspects of the High IOPS and io3 Flash Adapter device, via **Realizes**.

PhysicalPackage

One instance of **PhysicalPackage** exists for each discrete, physical High IOPS and io3 Flash Adapter device installed in the computer system. The Manufacturer, Model, SKU, SerialNumber, Version, and PartNumber properties can be used to describe these aspects of the physical card. **PhysicalPackage** is associated with **PCIDevice** via **Realizes** and the scoping **ComputerSystem** via **SystemPackaging**.

TemperatureSensor

One instance of **TemperatureSensor** exists for each **PhysicalPackage**. Temperature information for the drive is stored in the properties of this object.

Diagnostic Test

One instance of **DiagnosticTest** will exist. The **RunDiagnostic()** method will trigger a snapshot of device status for the specified **ManagedElement** which must be an instance of **IoMemoryPort**. The diagnostic run is synchronous and runs instantaneously. The resulting **ConcreteJob** object will associate to the originating **DiagnosticTest** instance and the respective **IoMemoryPort** instance that was specified. For more information, see [See SMI-S CIM Model on page 2](#). At this time, **RunDiagnostic()** can only be used with the default **DiagnosticSettingData** provided.

Each run will add a single entry of **DiagnosticSettingDataRecord** and associated **DiagnosticCompletionRecord** in the **DiagnosticLog**. The **RecordData** property of the **DiagnosticCompletionRecord** will record critical device status at the time of the run. The format of the **RecordData** string can be found in the **RecordFormat** property.

The format is a series of status strings, each of which can hold one of the following values delimited by an asterisk (*) character: "Unknown", "OK", "Warning", or "Error". Currently, seven status values are recorded: **WearoutStatus**, **WritabilityStatus**, **FlashbackStatus**, **TemperatureStatus**, **MinimalModeStatus**, **PciStatus** and **InternalErrorStatus**. All of these should report "OK" under normal operating conditions.

WearoutStatus will be set to "Warning" when less than 10% reserve space is left on the device. It will be set to "Error" when there is no more reserved space. The messages will be:

- **WritabilityStatus** will be set to "Error" whenever the device is write throttling or in read-only mode. This can happen due to a variety of conditions including device wearout and insufficient power.
- **FlashbackStatus** will report "Warning" if a catastrophic error causes Flashback protection to be degraded.
- **TemperatureStatus** will report "Warning" when the device temperature is nearing the maximum safe temperature and "Error" when the maximum safe temperature is reached or surpassed.
- **MinimalModeStatus** will report either "Warning" or "Error" whenever the device is in minimal mode.
- **PciStatus** will report "Warning" or "Error" if there are compatibility problems with the host PCIe bus.
- **InternalErrorStatus** will report "Error" if there are any internal problems with the High IOPS and io3 Flash Adapter VSL software.

The **CompletionState** property will summarize the results and may be set to Unknown, OK, Warning or Failed. If any status is in error the state will report as Failed. Otherwise, if there is any warning status the state will report Warning. The **Message** property will be set to indicate the appropriate action if there are any warnings or errors.

DiagnosticSetting Data

There will be an instance of **DiagnosticSettingData** associated with the **DiagnosticTest** instance. For more information, see [See SMI-S CIM Model on page 2](#). It records the default settings for each call to **RunDiagnostic**.

DiagnosticServiceCapabilities

There is an instance of **DiagnosticServiceCapabilities** associated with the **DiagnosticTest** instance that records the capabilities of the **DiagnosticTest** service.

DiagnosticLog

An instance of **DiagnosticLog** is associated with the **DiagnosticTest** instance and will store the results of each run.

DiagnosticSettingRecord

A copy of the default **DiagnosticSettingData** will be stored in a **DiagnosticSettingDataRecord** each time a diagnostic is run and will be associated with an instance of **DiagnosticCompletionRecord**.

DiagnosticCompletionRecord

An instance of **DiagnosticCompletionRecord** will store the results of each **RunDiagnostic** execution. The details are explained in **DiagnosticTest**.

RegisteredDiskDriveLiteProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Disk Drive Lite Profile. The following properties are set as follows:

- **InstanceID** – set to *SNIA:DiskDriveLiteProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredDAPortsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the DA Ports Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:DAPortsProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredStorageHBAProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Storage HBA Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:StorageHBAProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Storage HBA Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredHostDiscoveredResourcesProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Host Discovered Resources Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:HostDiscoveredResourcesProfile-1.2.0*
- **RegisteredOrganization** – set to "11" (SNIA)

- **RegisteredName** – set to *Host Discovered Resources Profile*
- **RegisteredVersion** – set to "1.2.0"

RegisteredPCIDeviceProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the PCI Device Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1075-PCIDevice-1.0.0a*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *PCIDevice Profile*
- **RegisteredVersion** – set to "1.0.0a"

RegisteredSoftwareInventoryProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Inventory Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1023-SoftwareInventory-1.0.1*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *Software Inventory Profile*
- **RegisteredVersion** – set to "1.0.1"

RegisteredSoftwareUpdateProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Update Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1023-SoftwareUpdate-1.0.0*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *Software Update Profile*
- **RegisteredVersion** – set to "1.0.0"

RegisteredPhysicalAssetProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Physical Asset Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:PhysicalAssetProfile-1.0.2*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *PhysicalAsset Profile*
- **RegisteredVersion** – set to "1.0.2"

RegisteredSensorsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Sensors Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:SensorsProfile-1.0.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Sensors Profile*
- **RegisteredVersion** – set to "1.0.0"

RegisteredCommonDiagnosticProfile

Only one instance of this class is needed. It will reside in the `/root/interop` namespace and indicate the implementation of the Common Diagnostic Model Profile. The **InstanceID** property will be set to a value of "DMTF:DiagnosticsProfile-2.0.0a". The **RegisteredOrganization** property will be set to a value of "2" (DMTF). The **RegisteredName** property will be set to a value of "Diagnostics Profile". The **RegisteredVersion** property will be set to a value of "2.0.0a".

Indications - Windows

An indication will be generated periodically when a serious condition exists for a particular High IOPS and io3 Flash Adapter device. The WBEM provider currently supports six types of indications. They alert users of the SMI-S provider to conditions such as imminent wearout, degradation of writability, degradation of the flashback feature, higher temperature, and internal error states.

The indications will be instances of the **FIO_AlertIndication** class which simply specializes the **CIM_AlertIndication** class.

The values for the properties of the **FIO_AlertIndication** instances are under development and may change as testing proceeds and feedback is received.

FIO_AlertIndication

Property	Value
IndicationIdentifier	See below for each type
IndicationTime	Timestamp when sent
AlertingManagedElement	IoMemoryPort.DeviceID=<device ID>
AlertingElementFormat	CIMObjectPath (2)
AlertType	Device Alert (5)
PerceivedSeverity	See below for each type
ProbableCause	See below for each type
SystemCreationClassName	"FIO_AlertIndication"
SystemName	<hostname>
ProviderName	"fiosmis"
CorrelatedIndications	Not used
Description	Class description
OtherAlertType	Not used
OtherSeverity	Not used
ProbableCauseDescription	Not used

Property	Value
EventID	Same as IndicationIdentifier
OwningEntity	<vendor>
MessageID	Not used
Message	Not used
MessageArguments	Not used

Reduced Writability Indication

The High IOPS and io3 Flash Adapter VSL software can dramatically reduce write throughput to manage device conditions such as excessive wear, high temperature, and insufficient power. The reduced writability indication is generated while the drive is in this mode. If the triggering condition is excessive wear, the **IoMemoryPort** health percentage will report 0% health.

Property	Value
IndicationIdentifier	<mfr>": "<hostname>":write"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52) Temperature Unacceptable (51) Power Problem (36)

Read-only Indication

When the drive has reached the end-of-life, it can no longer be written to and can only be read from. The read-only indication will be sent when this occurs. The **IoMemoryPort** health percentage will continue to report 0% health when this happens.

Property	Value
IndicationIdentifier	<mfr>": "<hostname>":read_only"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Wearout Indication

As the drive wears out, this indication is generated as a warning when the drive health percentage drops below 10%, before write throughput is reduced.

Property	Value
IndicationIdentifier	<mfr>": "<hostname>":wearout"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Flashback Indication

If a catastrophic part failure degrades the effectiveness of the flashback feature, this indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":flashback"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Loss of Redundancy (88)

High Temperature Indication

This indication will be sent when the temperature of the card becomes excessive.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":temperature"
PerceivedSeverity	Critical (6)
ProbableCause	Temperature Unacceptable (51)

Error Indication

If the High IOPS and io3 Flash Adapter VSL software is in an error state the error indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":error"
PerceivedSeverity	Major (6)
ProbableCause	Other (1)

SMI-S Interface (VMware)

To manage the High IOPS and io3 Flash Adapter VSL, you must use the provided management utilities. There are two options available for managing the VSL:

- **COS/Shell/TSM command-line utilities:** These utilities are installed with the ioMemory VSL software. In order to use these utilities on ESXi, the Shell/TSM (Tech Support Mode) must be enabled.
 - The Compile Host Log troubleshooting utility is only available as a COS/Shell/TSM command-line utility.
- **Remote SMI-S Scripts:** These provide remote management of the software and devices without enabling Tech Support Mode (TSM) or logging in to the COS.
 - To use the SMI-S interface, you must install the CIM (SMI-S) provider on the ESX(i) host and the Python SMI-S Management Scripts on a remote machine.
 - This section explains how to install the CIM provider.

IBM's SMI-S interface allows you to remotely manage the High IOPS and io3 Flash Adapter VSL software on your ESX(i) system. The SMI-S provider works with popular CIM servers, including SFCB. SFCB is part of a typical ESX(i) installation, and it is used by vSphere software to manage the ESX(i) system.

Installing the SMI-S Provider on ESXi 5.0

Be sure to transfer the CIM (SMI-S) provider offline bundle to the host (hypervisor) machine's local storage.

1. Stop all VMs and put the host in Maintenance Mode.
2. Install the CIM provider while in Maintenance Mode by running the following command:

```
esxcli --server <servername> software vib install -d <offline-bundle> --no-sig-check
```

Where <offline-bundle> is the absolute path to the offline bundle on the hypervisor host. For example, if the offline bundle is in the bundles directory of a datastore with the name of **datastore1**, the path would be: **vmfs/volumes/datastore1/bundles/<offline-bundle>**

NOTE-

Command-line Installation:

You can install the CIM provider on the ESXi 5.0 host using the SSH/TSM. Simply use the same esxcli command without the **--server** option.

3. Reboot your ESXi system.

This installs the SMI-S provider and registers it with the SFCB server. You are now able to connect to the SMI-S provider.

Installing the SMI-S Provider on ESX(i) 4.x Using the vCLI

1. Stop all VMs and put the host in Maintenance Mode.
2. Navigate to the folder (on the remote machine) with the downloaded files.
3. Install the SMI-S provider.

```
vihostupdate --server <server-name> --install --bundle --no-sig-check  
./fusionio-cimprovider-<esx-version>-bundle-<version>.zip
```

4. Reboot the ESXi host.

This installs the SMI-S provider and registers it with the SFCB server. You are now able to connect to the SMI-S provider.

Installing the SMI-S Provider on ESX(i) 4.x using the Command-line Interface

To install the ioMemory VSL on an existing ESX(i) host using esxupdate:

1. Turn on the host and log in as administrator.
2. Stop all VMs and enter maintenance mode.
3. Navigate to the directory where you have transferred offline bundle.
4. Run the esxupdate command to install drivers using the offline bundle.

```
$ esxupdate --bundle  
fusionio-cimprovider-<esx-version>-bundle-<version>.zip update --no-sig-  
check
```

5. Reboot the host system.

This installs the SMI-S provider and registers it with the SFCB server. You are now able to connect to the SMI-S provider.

Interfacing with the SMI-S Provider

The method for managing your High IOPS and io3 Flash Adapter devices is through the SMI-S provider.

- CIM Browsers: If you are familiar with Common Information Models, and are comfortable using CIM browsers (such as YAWN), then you can connect to the SMI-S provider using your preferred browser. For more information, including the IBM SMI-S CIM model, see [See Using a CIM Browser for SMI-S Management on page 36](#).

Using a CIM Browser for SMI-S Management

This section outlines our SMI-S CIM model, including the instances and associations within that model. You can use this model along with a CIM browser to interface with the SMI-S provider installed on an ESX (i) host. This will allow you to manage your ioMemory device(s).

Before you can use a CIM browser to interface with the SMI-S provider, you must first install the SMI-S provider on your ESX(i) host system.

SMI-S Interface Background

The SMI-S interface is based on Web-Based Enterprise Management (WBEM) and provides a Common Information Model (CIM) model that represents the ioMemory device and associated software, in accordance with existing Distributed Management Task Force (DMTF), Storage Networking Industry Association (SNIA), and Storage Management Initiative Specification (SMI-S) standards. This model permits backward-compatible extension, accommodating new hardware and software features developed by .

References

CIM Schema v2.26

http://www.dmtf.org/standards/cim/cim_schema_v2260

DMTF DSP1011, Physical Asset Profile

http://www.dmtf.org/standards/published_documents/DSP1011_1.0.2.pdf

DMTF DSP1023, Software Inventory Profile

http://www.dmtf.org/standards/published_documents/DSP1023_1.0.1.pdf

DMTF DSP1033, Profile Registration

http://www.dmtf.org/standards/published_documents/DSP1033_1.0.0.pdf

DMTF DSP1075 PCI Device Profile

http://www.dmtf.org/standards/published_documents/DSP1075_1.0.0.pdf

DMTF DSP1002, Diagnostics Profile

http://www.dmtf.org/standards/published_documents/DSP1002_2.0.0.pdf

SMI-S v1.4 Architecture

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Architecture.book_.pdf

SMI-S v1.4 Common Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_CommonProfiles.book_.pdf

SMI-S v1.4 Host Profiles

http://www.snia.org/sites/default/files/SMI-Sv1.4r6_Host.book_.pdf

SMI-S v1.4 Common Diagnostic Model

<http://www.dmtf.org/standards/mgmt/cdm/>

Description

SMI-S is a collection of specifications that traditionally focus on Storage Area Network (SAN) systems based on the SCSI command set, such as Fibre Channel, iSCSI, and SAS. However, the general pattern used to model these storage systems can be applied to solid-state, direct-attached storage systems such as those provided by . High IOPS and io3 Flash Adapter devices are modeled using the SMI-S patterns established in the Storage HBA, Direct Attached (DA) Ports, and Host Discovered Resources Profiles. The physical aspects of the High IOPS and io3 Flash Adapter device and all firmware and High IOPS and io3 Flash Adapter VSL software are modeled using published DMTF specifications, including the Physical Asset, Software Inventory, PCI Device Profiles, and Common Diagnostic Model Profile.

See [See SMI-S CIM Model on page 2](#) for the chart that describes the SMI-S CIM model, with High IOPS and io3 Flash Adapter devices and their associated firmware and software. For simplicity, the prefix FIO_ has been removed from the class names.

A: IOMemoryPort Class

The central instance of the model is of the **IOMemoryPort** class (A in the figure), a logical representation of the High IOPS and io3 Flash Adapter device. It supports the extrinsic methods necessary to provision the drive. An instance of **PCIDevice** (B) and **IOMemoryPort** exist for each installed High IOPS and io3 Flash Adapter device, and they are associated with instances of **ConcreteIdentity** (1). An instance of **SSDStatistics** (C), that contains important performance and capacity data for the device, is associated by an **ElementStatisticalData** association (2) to each **IOMemoryPort**. **IOMemoryPort** is scoped by an instance of the **ComputerSystem** class. The **SystemDevice** (3) aggregation aggregates **IOMemoryPort** within the containing **ComputerSystem**.

E: IOMemoryPortController Class

An instance of **IOMemoryPortController** (E) represents the High IOPS and io3 Flash Adapter VSL software used to control the installed High IOPS and io3 Flash Adapter devices. **IOMemoryPortController** specializes **CIM_PortController**, and it aggregates **IOMemoryPort** with the **ControlledBy** (4) aggregation. The software version and vendor information are represented by the **SoftwareIdentity** (F) instance that is associated to **IOMemoryPortController** (E) via **ElementSoftwareIdentity** (5). The **SoftwareIdentity** that represents the installed High IOPS and io3 Flash Adapter VSL software is associated to the scoping **ComputerSystem** using the **InstalledSoftwareIdentity** association (6).

An instance of the **ProtocolEndpoint** class (G) represents both ends of the logical data path between the **IOMemoryPort** and the solid-state storage. This aspect of the model is derived from the pattern in the DA Ports Profile, where the port is both an initiator and target. **ProtocolEndpoint** is associated to the **IOMemoryPort** by **DeviceSAPImplementation** (7) and to the **ComputerSystem** by **HostedAccessPoint** (8).

H: LogicalSSD Class (Block Device)

The block device exposed to applications (file systems, database, and logical volume manager) is modeled using an instance of **LogicalSSD** (H), a subclass of **CIM_DiskDrive**. It is associated with a **StorageExtent** (J) using the **MediaPresent** association (9), but the **StorageExtent** will always be present. It is also associated to the **ProtocolEndpoint** (G) representing the **IOMemoryPort** using **SAPAvailableForElement** (10) and to the scoping **ComputerSystem** using **SystemDevice** (3).

High IOPS and io3 Flash Adapter devices, being PCIe devices, are also represented by an instance of the **PCIDevice** class (B). **IOMemoryPort** is an alternate representation of the **PCIDevice** and its associated control device. It is associated to it by the **ConcreteIdentity** association.

K: SoftwareIdentity

The High IOPS and io3 Flash Adapter VSL software is also represented with **SoftwareIdentity**, which is associated to the **PCIDevice** by the **ElementSoftwareIdentity** association (11). The **SoftwareIdentity** (firmware) is associated to the scoping **ComputerSystem** by the **InstalledSoftwareIdentity** association (12). An instance of **SoftwareInstallationService** (L) is associated with each **PCIDevice**, which can be used to update device firmware.

M: Physical Aspects

The physical aspects of High IOPS and io3 Flash Adapter devices are represented by an instance of the **PhysicalPackage** class (M), which is associated to the **PCIDevice** by **Realizes** (13) and to the scoping **ComputerSystem** by **SystemPackaging** (14). The temperature sensors on High IOPS and io3 Flash Adapter devices are represented by an instance of **TemperatureSensor** (N) and is associated to the **PhysicalPackage** by **AssociatedSensor**.

Implementation

This section describes the arrangement of instances and associations for the device CIM model. Not all class properties are described in detail. Consult the CIM schema for detailed description of all properties.

The device health is indicated by the value of the **HealthLevel** property. Values include: *Healthy*, *Warning*, *Reduced Write*, and *Read Only*. These values are mapped to **standardHealthState** values – *OK*, *Degraded/Warning*, and *Critical Failure* – as appropriate.

Extrinsic methods for device provisioning include attach, detach, format, and update. The attach method creates a block device for the High IOPS and io3 Flash Adapter. Detach disables the block device. A format option enables users to specify the device size in either megabytes or a percentage. The update method allows users to upgrade the firmware on the device.

Device longevity is indicated by the value of the **HealthPercentage** property. **FlashbackAvailability** indicates whether or not this feature of the High IOPS and io3 Flash Adapter is online.

IOMemoryPorts are aggregated by **IOMemoryPortController** via the **ControlledBy** aggregation. Instances of **IOMemoryPort** are associated to their corresponding **PCIDevice** with the **ConcreteIdentity** association. The **IOMemoryPort** is a logical device of the scoping **ComputerSystem** and is indicated as such by the **SystemDevice** aggregation.

Products with two or more High IOPS and io3 Flash Adapter, such as the High IOPS Duo Adapter, do appear like two separate High IOPS and io3 Flash Adapter devices. For products with multiple devices, the **IOMemoryPort** class is extended to include information about the carrier card type, serial number, and external power connection for the product as a whole.

IOMemoryPort

One instance of **IOMemoryPort** exists for each High IOPS and io3 Flash Adapter device installed in the **ComputerSystem**.

The **LocationIndicator** property reflects the state of the device indicator beacon (e.g., all LEDs on solid). Reading the value gives the current state of the indicator. Writing the value with "On" or "Off" turns the indicator on or off and can be used to determine the device's physical location.

SSDStatistics

One instance of **SSDStatistics** exists for each **IOMemoryPort** instance. Properties of this object provide performance and capacity information. Some of this information is only available when the drive is attached (i.e., the state of the associated **IOMemoryPort** is "Attached").

IOMemoryPortController

Only one instance of **IOMemoryPortController** exists, representing the High IOPS and io3 Flash Adapter VSL software used to control **IOMemoryPorts**. The **IOMemoryPortController** specializes the **CIM_PortController**.

IOMemoryPortController is aggregated to the scoping **ComputerSystem** using the **SystemDevice** aggregation. **IOMemoryPortController** is associated with a **SoftwareInventory** instance representing the High IOPS and io3 Flash Adapter VSL software properties via the **ElementSoftwareIdentity** association.

ProtocolEndpoint

One instance of **ProtocolEndpoint** exists for each instance of **IOMemoryPort**. It is associated to the **IOMemoryPort** using **DeviceSAPImplementation** and to **LogicalSSD** using **SAPAvailableForElement**. Because an **IOMemoryPort** represents both the initiator and target ports, only one **ProtocolEndpoint** per **IOMemoryPort** is needed to model the connection between **IOMemoryPort** and **LogicalSSD**.

LogicalSSD

One instance of **LogicalSSD**, a subclass of **CIM_DiskDrive**, exists for each block device (**/dev/fioX**) exposed by an High IOPS and io3 Flash Adapter device. Correlatable IDs are used, based on operating system device names. This enables client applications to associate block devices discovered through this model with resources discovered from other SMI-S models instrumented on the host system.

ComputerSystem aggregates **LogicalSSDs** via **SystemDevice**. The **LogicalSSD** instances are associated to their **ProtocolEndpoints** via **SAPAvailableForElement**. If the **IOMemoryPort** associated to the endpoint is not attached, then the **Availability** property is set to "Off Line," and the **DeviceID** property value is "Unknown."

StorageExtent

One instance of **StorageExtent** is associated with each **LogicalSSD** and represents the logical storage of the associated device.

SoftwareIdentity

One instance of **SoftwareIdentity** exists to represent the High IOPS and io3 Flash Adapter VSL software. The firmware is also modeled using **SoftwareIdentity** but requires an instance for each High IOPS and io3 Flash Adapter device installed. The **IsEntity** property has a value of True, indicating that the **SoftwareIdentity** instance corresponds to a discrete copy of the High IOPS and io3 Flash Adapter

VSL software or firmware. The **MajorVersion**, **MinorVersion**, **RevisionNumber**, and **BuildNumber** properties convey the driver/firmware version information. The **Manufacturer** property can be used to identify IBM.

Another option for the firmware is to omit the **InstalledSoftwareIdentity** association with **ComputerSystem**, because the firmware is not really installed on **ComputerSystem**. This option would depend on how users want to model the firmware.

SoftwareInstallationService

An instance of **SoftwareInstallationService** exists for each **PCIDevice** and can be used to update the associated device's firmware.

PCIDevice

An instance of **PCIDevice** is instantiated for each High IOPS and io3 Flash Adapter device (PCIe card) in the computer. Properties are set as follows:

- **BusNumber** – bus number where the PCIe device exists
- **DeviceNumber** – device number assigned to the PCI device for this bus.
- **FunctionNumber** – set to the function number for the PCI device.
- **SubsystemID**, **SubsystemVendorID**, **PCIDeviceID**, **VendorID**, and **RevisionID** are optional but can be populated if values can be extracted from the configuration registers of the PCI device.

PCIDevice is associated with **IOMemoryPort**, its alternate logical representation, using **ConcreteIdentity**. The **PCIDevice** is also associated with **PhysicalPackage**, representing the physical aspects of the High IOPS and io3 Flash Adapter device, via **Realizes**.

PhysicalPackage

One instance of **PhysicalPackage** exists for each discrete, physical High IOPS and io3 Flash Adapter device installed in the computer system. The **Manufacturer**, **Model**, **SKU**, **SerialNumber**, **Version**, and **PartNumber** properties can be used to describe these aspects of the physical card. **PhysicalPackage** is associated with **PCIDevice** via **Realizes** and the scoping **ComputerSystem** via **SystemPackaging**.

TemperatureSensor

One instance of **TemperatureSensor** exists for each **PhysicalPackage**. Temperature information for the drive is stored in the properties of this object.

Diagnostic Test

One instance of **DiagnosticTest** will exist. The **RunDiagnostic()** method will trigger a snapshot of device status for the specified **ManagedElement** which must be an instance of **IOMemoryPort**. The diagnostic run is synchronous and runs instantaneously. The resulting **ConcreteJob** object will associate to the originating **DiagnosticTest** instance and the respective **IOMemoryPort** instance that was specified (see [See SMI-S CIM Model on page 2](#)). At this time, **RunDiagnostic()** can only be used with the default **DiagnosticSettingData** provided.

Each run will add a single entry of **DiagnosticSettingDataRecord** and associated **DiagnosticCompletionRecord** in the **DiagnosticLog**. The **RecordData** property of the **DiagnosticCompletionRecord** will record critical device status at the time of the run. The format of the **RecordData** string can be found in the **RecordFormat** property.

The format is a series of status strings, each of which can hold one of the following values delimited by an asterisk (*) character: "Unknown", "OK", "Warning", or "Error". Currently, seven status values are recorded: **WearoutStatus**, **WritabilityStatus**, **FlashbackStatus**, **TemperatureStatus**, **MinimalModeStatus**, **PciStatus** and **InternalErrorStatus**. All of these should report "OK" under normal operating conditions.

WearoutStatus will be set to "Warning" when less than 10% reserve space is left on the device. It will be set to "Error" when there is no more reserved space. The messages are:

- **WritabilityStatus** will be set to "Error" whenever the device is write throttling or in read-only mode. This can happen due to a variety of conditions including device wearout and insufficient power.
- **FlashbackStatus** will report "Warning" if a catastrophic error causes Flashback protection to be degraded.
- **TemperatureStatus** will report "Warning" when the device temperature is nearing the maximum safe temperature and "Error" when the maximum safe temperature is reached or surpassed.
- **MinimalModeStatus** will report either "Warning" or "Error" whenever the device is in minimal mode.
- **PciStatus** will report "Warning" or "Error" if there are compatibility problems with the host PCIe bus.
- **InternalErrorStatus** will report "Error" if there are any internal problems with the ioMemory VSL software.

The **CompletionState** property will summarize the results and may be set to Unknown, OK, Warning or Failed. If any status is in error the state will report as Failed. Otherwise, if there is any warning status the state will report Warning. The **Message** property will be set to indicate the appropriate action if there are any warnings or errors.

DiagnosticSetting Data

There will be an instance of **DiagnosticSettingData** associated with the **DiagnosticTest** instance (see [See SMI-S CIM Model on page 2](#)). It records the default settings for each call to **RunDiagnostic**.

DiagnosticServiceCapabilities

There is an instance of **DiagnosticServiceCapabilities** associated with the **DiagnosticTest** instance that records the capabilities of the **DiagnosticTest** service.

DiagnosticLog

An instance of **DiagnosticLog** is associated with the **DiagnosticTest** instance and will store the results of each run.

DiagnosticSettingRecord

A copy of the default **DiagnosticSettingData** will be stored in a **DiagnosticSettingDataRecord** each time a diagnostic is run and will be associated with an instance

of **DiagnosticCompletionRecord**.

DiagnosticCompletionRecord

An instance of **DiagnosticCompletionRecord** will store the results of each **RunDiagnostic** execution. The details are explained in **DiagnosticTest**.

RegisteredDiskDriveLiteProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Disk Drive Lite Profile. The following properties are set as follows:

- **InstanceID** – set to *SNIA:DiskDriveLiteProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredDAPortsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the DA Ports Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:DAPortsProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *DirectAccess Ports Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredStorageHBAProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Storage HBA Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:StorageHBAProfile-1.4.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Storage HBA Profile*
- **RegisteredVersion** – set to "1.4.0"

RegisteredHostDiscoveredResourcesProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Host Discovered Resources Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:HostDiscoveredResourcesProfile-1.2.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Host Discovered Resources Profile*
- **RegisteredVersion** – set to "1.2.0"

RegisteredPCIDeviceProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the PCI Device Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1075-PCIDevice-1.0.0a*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *PCIDevice Profile*
- **RegisteredVersion** – set to "1.0.0a"

RegisteredSoftwareInventoryProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Inventory Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1023-SoftwareInventory-1.0.1*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *Software Inventory Profile*
- **RegisteredVersion** – set to "1.0.1"

RegisteredSoftwareUpdateProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Software Update Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:DSP1023-SoftwareUpdate-1.0.0*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *Software Update Profile*
- **RegisteredVersion** – set to "1.0.0"

RegisteredPhysicalAssetProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Physical Asset Profile. The properties are set as follows:

- **InstanceID** – set to *DMTF:PhysicalAssetProfile-1.0.2*
- **RegisteredOrganization** – set to "2" (DMTF)
- **RegisteredName** – set to *PhysicalAsset Profile*
- **RegisteredVersion** – set to "1.0.2"

RegisteredSensorsProfile

Only one instance of this class is needed. It resides in the **/root/interop** namespace and indicates the implementation of the Sensors Profile. The properties are set as follows:

- **InstanceID** – set to *SNIA:SensorsProfile-1.0.0*
- **RegisteredOrganization** – set to "11" (SNIA)
- **RegisteredName** – set to *Sensors Profile*
- **RegisteredVersion** – set to "1.0.0"

RegisteredCommonDiagnosticProfile

Only one instance of this class is needed. It will reside in the **/root/interop** namespace and indicate the implementation of the Common Diagnostic Model Profile. The **InstanceID** property will be set to a value of "DMTF:DiagnosticsProfile-2.0.0a". The **RegisteredOrganization** property will be set to a value of "2" (DMTF). The **RegisteredName** property will be set to a value of "Diagnostics Profile". The **RegisteredVersion** property will be set to a value of "2.0.0a".

Indications

An indication will be generated periodically when a serious condition exists for a particular High IOPS and io3 Flash Adapter device. The WBEM provider currently supports six types of indications. They alert users of the SMI-S provider to conditions such as imminent wearout, degradation of writability, degradation of the flashback feature, higher temperature, and internal error states.

The indications will be instances of the **FIO_AlertIndication** class which simply specializes the **CIM_AlertIndication** class.

The values for the properties of the **FIO_AlertIndication** instances are under development and may change as testing proceeds and feedback is received.

FIO_AlertIndication

Property	Value
IndicationIdentifier	See below for each type
IndicationTime	Timestamp when sent
AlertingManagedElement	IoMemoryPort.DeviceID=<device ID>
AlertingElementFormat	CIMObjectPath (2)
AlertType	Device Alert (5)
PerceivedSeverity	See below for each type
ProbableCause	See below for each type
SystemCreationClassName	"FIO_AlertIndication"
SystemName	<hostname>
ProviderName	"fiosmis"
CorrelatedIndications	Not used
Description	Class description
OtherAlertType	Not used
OtherSeverity	Not used
ProbableCauseDescription	Not used
EventID	Same as IndicationIdentifier
OwningEntity	<vendor>
MessageID	Not used
Message	Not used
MessageArguments	Not used

Reduced Writability Indication

The High IOPS and io3 Flash Adapter VSL software can dramatically reduce write throughput to manage device conditions such as excessive wear, high temperature, and insufficient power. The reduced writability indication is generated while the drive is in this mode. If the triggering condition is excessive wear, the **IoMemoryPort** health percentage will report 0% health.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":write"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)
	Temperature Unacceptable (51)
	Power Problem (36)

Read-only Indication

When the drive has reached the end-of-life, it can no longer be written to and can only be read from. The read-only indication will be sent when this occurs. The IoMemoryPort health percentage will continue to report 0% health when this happens.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":read_only"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Wearout Indication

As the drive wears out, this indication is generated as a warning when the drive health percentage drops below 10%, before write throughput is reduced.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":wearout"
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Threshold Crossed (52)

Flashback Indication

If a catastrophic part failure degrades the effectiveness of the flashback feature, this indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":flashback"

Property	Value
PerceivedSeverity	Degraded/Warning (3)
ProbableCause	Loss of Redundancy (88)

High Temperature Indication

This indication will be sent when the temperature of the card becomes excessive.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":temperature"
PerceivedSeverity	Critical (6)
ProbableCause	Temperature Unacceptable (51)

Error Indication

If the High IOPS and io3 Flash Adapter VSL software is in an error state the error indication will be sent.

Property	Value
IndicationIdentifier	<mfr>":"<hostname>":error"
PerceivedSeverity	Major (6)
ProbableCause	Other (1)

Setting Up SNMP (Linux)

The **fio-snmp-agentx** SNMP agent is an RFC 2741-compliant AgentX sub-agent. It can work with any RFC-compliant SNMP agent, such as Net-SNMP. The master SNMP agent defers queries to **fio-snmp-agentx** for supported MIBs.

SNMP Master Agent - Linux

The **fio-snmp-agentx**, provided in the **fio-util** package, requires an already-installed SNMP master agent. The SNMP master agent must support and be configured for AgentX connections (see <http://www.ietf.org/rfc/rfc2741.txt>). The **fio-snmp-agentx** is tested and verified with Net-SNMP, which is the typical SNMP agent provided with most Linux distributions.

There are several agents available that support this functionality. If you choose to use Net-SNMP, then use the instructions in the following sections to configure and launch it.

Launching the SNMP Master Agent

Install the Net-SNMP package using the package manager for your version of Linux.

Red Hat

Use the following command to install Net-SNMP on Red Hat:

```
yum install net-snmp rsync
```

Other Linux Versions

Use the standard system package manager to install the Net-SNMP package on your Linux distribution. The **fio-snmp-mib** package places MIB files in **/usr/share/fio/mib**.

Configuring the Master Agent

You can configure the Net-SNMP master agent daemon to set the network communications parameters, security, and other options by using the **snmpd.conf** text file. The location of this file is system-dependent; often it is in **/etc/snmp** or **/usr/share/snmp**.

A simple **snmpd** configuration file might include the following:

```
# set standard SNMP variables
syslocation "Data room, third rack"
syscontact itguy@example.com
# required to enable the AgentX protocol
master agentx
agentxsocket tcp:localhost:705
#set the port that the agent listens on (defaults to 161)
agentaddress 161
# simple access control (some form of access control is required)
rocommunity public
```

Running the Master Agent

Once you install and configure the master agent, you must start or restart the **snmpd** daemon for the new parameters to take effect. You can simply run **snmpd** from its installed location (often **/usr/sbin** – see the **snmpd** man page for options). It typically needs root privileges to run properly. You can also use the **snmpd** startup script in **/etc/init.d** or **/etc/rc.d/init.d**. If you are concerned about security, use the more advanced SNMPv3 access control instead of the **rocommunity** and **rwcommunity** access control directives as outlined in the relevant man page.

SNMP AgentX Subagent - Linux

Attention!

The SNMP agent requires the **libvsl** RPM package. This should have been installed as part of the High IOPS and io3 Flash Adapter VSL software installation.

Installing the SNMP Subagent

1. Download the IBM SNMP packages.
2. Install the package using your operating systems package manager. For instance, on Red Hat, run the following:

```
rpm -Uvh fio-snmp-*.rpm
```

The SNMP package places its MIB files in **/usr/share/fio/mib**.

Running and Configuring the Fusion SNMP Subagent

1. Configure the subagent by creating a **fio-snmp-agentx.conf** file.
2. Store this **.conf** file in the **/opt/fio/etc/snmp** directory.
3. At a minimum, set the agent network parameters in this file similar to the following:

```
# required to enable the AgentX protocol  
  
agentxsocket tcp:localhost:705
```

This must match the AgentX network parameters in the **snmpd.conf** file for the master agent. For further AgentX configuration information, consult the man pages or visit <http://www.net-snmp.org>.

The **fio-snmp-agentx** startup script will launch automatically at boot time once the installation and configuration is complete.

Manually Running the SNMP Subagent

If you need to run the SNMP Subagent manually, follow these steps:

1. After the SNMP master agent is started, start the subagent by running this command:

```
/usr/bin/fio-snmp-agentx
```

This command launches the subagent using the Net-SNMP configuration file named **fio-snmp-agentx.conf**. This file must reside in one of the **/opt/fio/etc/snmp** directory.

2. You can now view the ioMemory device management information using an SNMP MIB browser or by using a network management system accessing **FIOioDrv.mib** (in **/usr/share/fio/mib**).

The subagent can be run with the following parameters:

```
fio-snmp-agentx [options]
```

Option	Description
-f	Force the sub-agent to run in the foreground instead of as a daemon
-l	<log file> Log file to use
-s	Send errors to stderr instead of to syslog

Subagent Log File

The SNMP subagent can maintain a log file regarding its own activities. This file is separate from the MIB, as it includes entries on the subagent's communications with the master agent, including any errors or intermittent issues.

To have the subagent maintain this log file, include the **-l** parameter and a path to the log file as part of the command in running the subagent. For example, this command:

```
fio-snmp-agentx -l /usr/snmp/subagent.log
```

keeps the subagent log file as **subagent.log**, in the **/usr/snmp** directory.

The SNMP subagent is now ready to monitor your device.

Using the SNMP Sample Config Files - Linux

When you install SNMP, the following sample config files are available:

- **/usr/share/doc/fio-snmp-agentx/conf/snmpd.conf/** (master agent)
- **/usr/share/doc/fio-snmp-agentx/conf/fio-snmp-agentx.conf/** (sub-agent)

To customize and use the sample config files,

1. Rename your **snmpd.conf** file (such as to **snmpd-orig.conf**) and your **fio-snmp-agentx.conf** file (such as to **fio-snmp-agentx-orig.conf**). The **snmpd.conf** file usually reside in **/etc/snmp** or **/usr/share/snmp**. The **fio-snmp-agentx.conf** file resides in the **/opt/fio/etc/snmp** directory.
2. From the **/usr/share/doc/fio-snmp-agentx/conf/** directory, copy the sample **snmpd.conf** file and the sample **fio-snmp-agentx.conf** file to the appropriate directories.
3. Edit the sample files you copied and save your changes as **snmpd.conf** and **fio-snmp-agentx.conf**.

Enabling SNMP Test Mode - Linux

When the SNMP Agentx runs, it reads the **fio-snmp-agentx** config file:

```
#####
# Example config file for fio-snmp-agentx SNMP AgentX subagent.
#
# Fusion-io, Inc. #

agentxsocket tcp:localhost:705

# test_mode_enabled
# set to 1, true or yes to enable 0, false or no to disable (default:
false)
test_mode_enabled true
# traps_enabled
traps_enabled true
# testmode_file
# name of test mode file (default: testmode.ini)
testmode_file testmode.ini

# update_delay
# delay between agent polling requests in milliseconds (default: 250)
update_delay 100

# mib_select
# set to fio for FUSIONIO-IODRV-MIB or cpq for CPQIODRV-MIB (default: fio)
mib_select fio
#####
```

Conditions for test mode are described below:

1. If the Admin has set the **test_mode_enabled** parameter from TRUE to FALSE, the SNMP does not try to run test mode. Instead, it continues processing data as usual from the ioMemory VSL software, storing the data in the MIB.
2. If the CONF file says that **test_mode_enabled** is TRUE, the SNMP subagent reads the **testmode.ini** is read periodically by the subagent to check for any changes. A sample **testmode.ini** file is installed in **/usr/share/doc/fio-snmp-agentx/conf**.
3. If the **testmode.ini** file shows the test mode is set to ON, then it engages the test mode.
4. To find the SNMP index values, execute an SNMP WALK query against the OID: **fusionIoDimmInfoIndex**.

The SNMP subagent replaces any existing High IOPS and io3 Flash Adapter VSL software data it may have (for the High IOPS and io3 Flash Adapter device specified by **TestModeIndex**) with any populated fields in the list of parameters. If a field is not populated, Agentx retains the existing data and reports it to the MIB. If there is a value in a field, then the Agentx replaces that data and reports it to the MIB.

The subagent continues in test mode until the .INI file parameter is set to OFF. The test mode information is described in the **testmode.ini** file:

```
# SNMP Test Mode sample file.
# These values may be used to test the SNMP subsystem when it is in test
mode.

[SNMP Agent Test Mode]
TestMode = off
TestModeIndex = 0

# InfoState: Note that the following states may change, but current
definitions are:
# 0 = unknown
# 1 = detached
# 2 = attached
# 3 = minimal mode
# 4 = error
# 5 = detaching
# 6 = attaching
# 7 = scanning
# 8 = formatting
# 9 = updating firmware
# 10 = attach
# 11 = detach
# 12 = format
# 13 = update

InfoState = 2

InfoInternalTemp = 45
InfoAmbientTemp = 35
InfoWearoutIndicator = 2 ; 2=normal, 1=device is wearing out.
```

```
InfoWritableIndicator = 2 ; 2=normal, 1=non-writable, 0=write-reduced,
3=unknown
InfoFlashbackIndicator = 2 ; 2=normal, 1=flashback protection degraded.

ExtnTotalPhysCapacityU = 23
ExtnTotalPhysCapacityL = 215752192
ExtnUsablePhysCapacityU = 21
ExtnUsablePhysCapacityL = 7852192
ExtnUsedPhysCapacityU = 4
ExtnUsedPhysCapacityL = 782330816
ExtnTotalLogCapacityU = 18
ExtnTotalLogCapacityL = 2690588672
```

```

ExtnAvailLogCapacityU = 14
ExtnAvailLogCapacityL = 3870457856

ExtnBytesReadU = 18
ExtnBytesReadL = 3690588672
ExtnBytesWrittenU = 4
ExtnBytesWrittenL = 2578550816

InfoHealthPercentage = 95

InfoMinimalModeReason = 7 ; 0=unknown, 1=fw out of date, 2=low power, ;
3=dual plane failure, 5=internal, 6=card limit, ; 7=not in minimal mode,
8=unsupported OS, ; 9=low memory

InfoReducedWriteReason = 0 ; 0=none, 1=user requested, 2=no md blocks, ;
3=no memory, 4=failed die, 5=wearout, ; 6=adapter power, 7=internal,
8=power limit

InfoMilliVolts = 12000
InfoMilliVoltsPeak = 12100
InfoMilliVoltsMin = 11900
InfoMilliWatts = 6000
InfoMilliWattsPeak = 15000
InfoMilliAmps = 500
InfoMilliAmpsPeak = 1000

InfoAdapterExtPowerPresent = 1 ; 1=present, 2=absent

InfoPowerlossProtectDisabled = 2 ; 1=powerloss protection available but
disabled; 2=any other powerloss protection condition

```

SNMP MIB Support - Linux

For information on each MIB, including a description and variables, you may use a MIB browsing tool load one or more MIB files. The following SNMP MIB fields are supported in Linux:

- fusionIoDimmMibRevMajor
- fusionIoDimmInfoAdapterType
- fusionIoDimmMibRevMinor
- fusionIoDimmInfoAdapterPort
- fusionIoDimmMIBCondition
- fusionIoDimmInfoAdapterSerialNumber
- fusionIoDimmInfoIndex
- fusionIoDimmInfoAdapterExtPowerPresent
- fusionIoDimmInfoStatus
- fusionIoDimmInfoPowerlossProtectDisabled
- fusionIoDimmInfoName
- fusionIoDimmInfoInternalTempHigh
- fusionIoDimmInfoSerialNumber
- fusionIoDimmInfoAmbientTemp
- fusionIoDimmInfoPartNumber

- fusionIoDimmInfoPCIBandwidthCompatibility
- fusionIoDimmInfoSubVendorPartNumber
- fusionIoDimmInfoPCIPowerCompatibility
- fusionIoDimmInfoSparePartNumber
- fusionIoDimmInfoActualGoverningLevel
- fusionIoDimmInfoAssemblyNumber
- fusionIoDimmInfoLifespanGoverningLevel
- fusionIoDimmInfoFirmwareVersion
- fusionIoDimmInfoPowerGoverningLevel
- fusionIoDimmInfoDriverVersion
- fusionIoDimmInfoThermalGoverningLevel
- fusionIoDimmInfoUID
- fusionIoDimmInfoLifespanGoverningEnabled
- fusionIoDimmInfoState
- fusionIoDimmInfoLifespanGoverningTgtDate
- fusionIoDimmInfoClientDeviceName
- fusionIoDimmExtnIndex
- fusionIoDimmInfoBeacon
- fusionIoDimmExtnTotalPhysCapacityU
- fusionIoDimmInfoPCIAddress
- fusionIoDimmExtnTotalPhysCapacityL
- fusionIoDimmInfoPCIDeviceID
- fusionIoDimmExtnTotalLogCapacityU
- fusionIoDimmInfoPCISubdeviceID
- fusionIoDimmExtnTotalLogCapacityL
- fusionIoDimmInfoPCIVendorID
- fusionIoDimmExtnBytesReadU
- fusionIoDimmInfoPCISubvendorID
- fusionIoDimmExtnBytesReadL
- fusionIoDimmInfoPCISlot
- fusionIoDimmExtnBytesWrittenU
- fusionIoDimmInfoWearoutIndicator
- fusionIoDimmExtnBytesWrittenL
- fusionIoDimmInfoWritableIndicator
- fusionIoDimmExtnFormattedBlockSize
- fusionIoDimmInfoInternalTemp
- fusionIoDimmExtnCurrentRAMUsageU
- fusionIoDimmInfoHealthPercentage
- fusionIoDimmExtnCurrentRAMUsageL
- fusionIoDimmInfoMinimalModeReason
- fusionIoDimmExtnPeakRAMUsageU
- fusionIoDimmInfoReducedWriteReason
- fusionIoDimmExtnPeakRAMUsageL
- fusionIoDimmInfoMilliVolts
- fusionIoDimmWearoutTrap
- fusionIoDimmInfoMilliVoltsPeak
- fusionIoDimmNonWritableTrap
- fusionIoDimmInfoMilliVoltsMin
- fusionIoDimmTempHighTrap
- fusionIoDimmInfoMilliWatts
- fusionIoDimmTempOkTrap
- fusionIoDimmInfoMilliWattsPeak
- fusionIoDimmErrorTrap
- fusionIoDimmInfoMilliAmps

- fusionIoDimmPowerlossProtectTrap
- fusionIoDimmInfoMilliAmpsPeak

Sample SNMP Monitoring - Linux

As a data-source management tool, the SNMP agentx provides information that you can integrate into existing management applications. This example shows how an organization adapted their current management application to use certain SNMP traps and SNMP MIBs to monitor all of the ioMemory devices installed in their network.

These conditions follow the same conditions scheme as described in the Example Conditions to Monitor section earlier in this guide.

Condition	Trap or MIB	GREEN	YELLOW	RED
Device Status	fusionIoDimmInfoState: 2.1.1.1.12	attached(2)	detached(1), detaching(5), attaching(6), scanning(7), formatting(8), or updating(9)	minimal(3) or error(4)
Minimal Mode Reason	fusionIoDimmInfoMinimalModeReason: 2.1.1.1.30	7	N/A	Any other value
Power Loss Protection	fusionIoDimmInfoPowerlossProtectDisabled: 2.1.1.1.43	2	N/A	Any other value
Temperature	fusionIoDimmInfoCurrentTemp: 2.1.1.1.24	<90	90-96	97
Health Reserves	fusionIoDimmInfoPercentLifeRemaining: 2.1.1.1.25	>10	4-10	<4
Wearout Indicator	fusionIoDimmInfoWearoutIndicator: 2.1.1.1.21	2	N/A	Any other value
Writeable Indicator	fusionIoDimmInfoNonWritableIndicator: 2.1.1.1.23	2	N/A	Any other value
PCI Power Compatibility	fusionIoDimmInfoPCIPowerCompatibility: 2.1.1.1.46	2048	16	0

Setting up SNMP (Windows)

The software for High IOPS and io3 Flash Adapter VSL 3.2.2 and later does not provide the options to install support for SNMP. Once you run the Windows Setup program, it will stop and start the Windows SNMP Service to recognize the VSL's agent.

If you did not choose to install the SNMP support at Setup, and want to do so later, rerun the Setup program. Choose to install only the SNMP support from the list of items. Once the Setup program completes the install, it will stop and restart the Windows SNMP Service.

For details on using SNMP Test Mode, see [See SNMP Test Mode and MIB Support on page 55](#).

SNMP Test Mode and MIB Support

This section explains how you can set up a test mode with your Windows SNMP agent. This enables you to set test values in a Windows registry and force SNMP traps without having to create the actual conditions on the device.


For example, you can use the SNMP test mode to change the non-writeable indicator and generate a trap, or simulate a change to the physical or logical size of the device, etc.

NOTE-

To use SNMP Test Mode, you must have installed the SNMP option with your High IOPS and io3 Flash Adapter VSL software.

Using Test-Mode Registry Values

The screen capture below shows the registry entries included for SNMP test values.

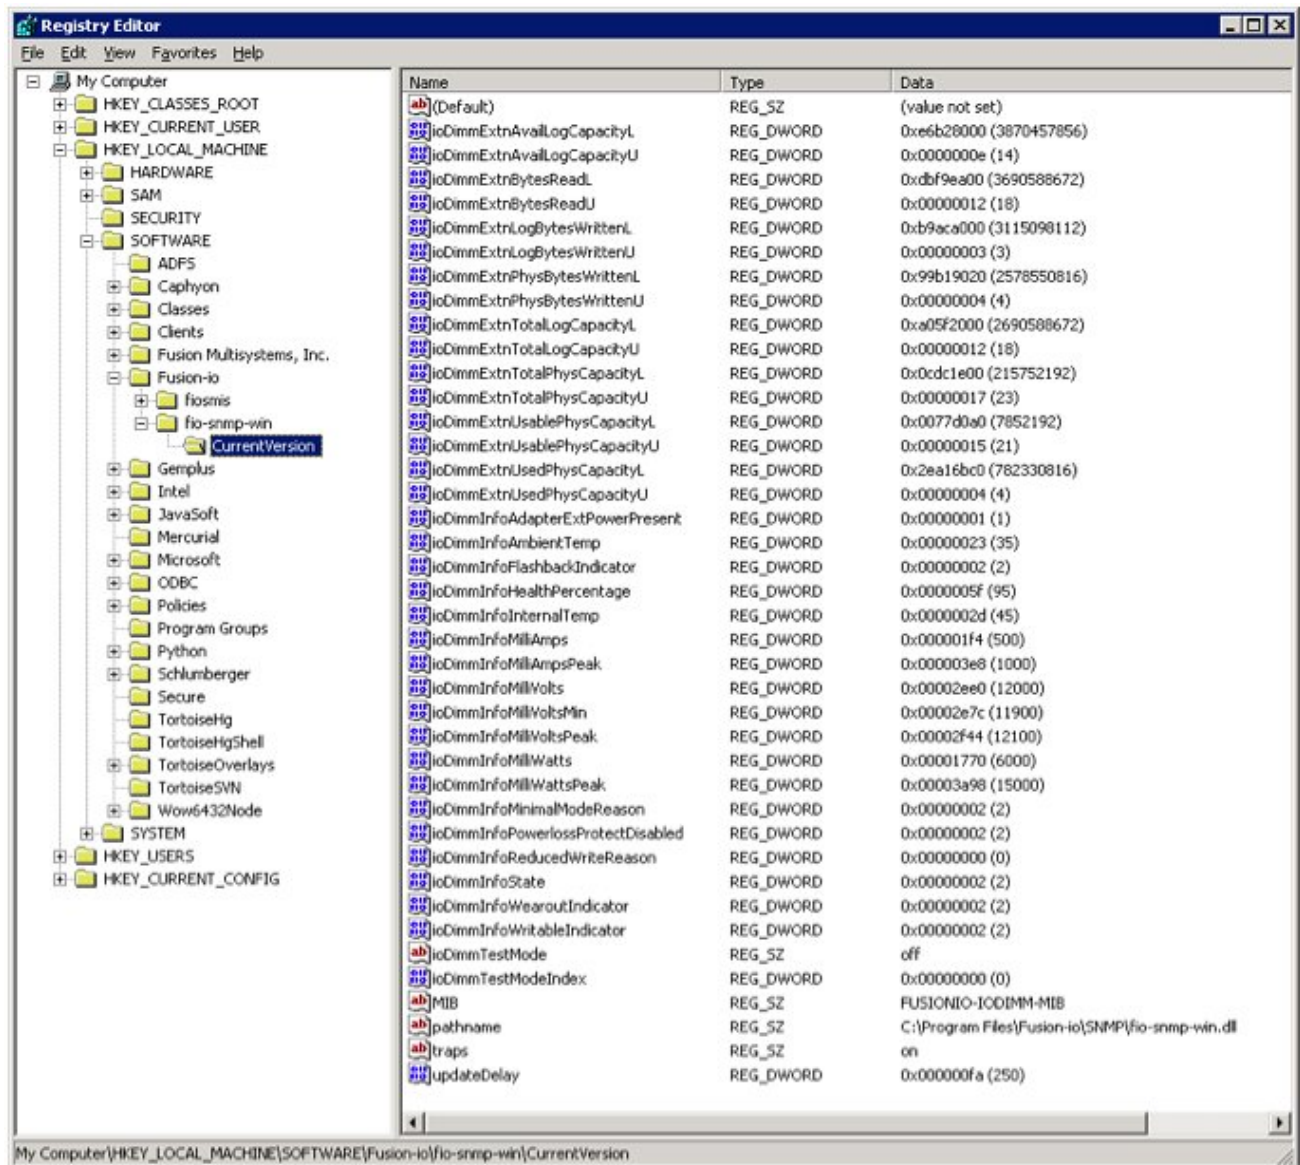

Each of these entries is described below. Entries marked by an asterisk (*) generate SNMP traps when set to the indicated values, and the **fusionIoDimmMIBCondition** and **fusionIoDimmInfoStatus** MIB variables may be affected because of the changes.

NOTE-

All entries, except those marked by **, reflect your registry changes immediately. Entries marked by ** require a restart of the Windows SNMP agent for the changes to take effect.

SNMP Test Registry Entry	Description
ioDimmExtnAvailLogCapacityL	Lower word of the available logical capacity in bytes
ioDimmExtnAvailLogCapacityU	Upper word of the available logical capacity in bytes
ioDimmExtnBytesReadL	Lower word of the total number of bytes read since the device was formatted
ioDimmExtnBytesReadU	Upper word of the total number of bytes read since the device was formatted
ioDimmExtnLogBytesWrittenL	Lower word of the number of user data bytes written
ioDimmExtnLogBytesWrittenU	Upper word of the number of user data bytes written
ioDimmExtnPhysBytesWrittenL	Lower word of the total physical bytes written
ioDimmExtnPhysBytesWrittenU	Upper word of the total physical bytes written
ioDimmExtnTotalLogCapacityL	Lower word of the total logical capacity in bytes as formatted
ioDimmExtnTotalLogCapacityU	Upper word of the total logical capacity in bytes as formatted
ioDimmExtnTotalPhysCapacityL	Lower word of the total logical capacity in bytes as formatted
ioDimmExtnTotalPhysCapacityU	Upper word of the total logical capacity in bytes as formatted
ioDimmExtnUsablePhysCapacityL	Lower word of the useable physical capacity in bytes. This is space that is holding valid data, or is erased and ready for writing, or is waiting to be reclaimed via garbage collection.
ioDimmExtnUsablePhysCapacityU	Upper word of the useable physical capacity in bytes. This is space that is holding valid data, or is erased and ready for writing, or is waiting to be reclaimed via garbage collection.
*ioDimmInfoInternalTemp	Current internal temperature of the device in degrees Celsius. If this value is set above 78 degrees Celsius for ioDimm cards, a trap is generated. If set above 90 degrees for HP Mezzanine cards, a trap is generated.
*ioDimmInfoFlashbackIndicator	1 = flashback redundancy is degraded; 2 = false

SNMP Test Registry Entry	Description
*ioDimmInfoNonWritableIndicator	1 = device is no longer writable because it has surpassed the read-only threshold; 2 = false
ioDimmInfoPercentLifeRemaining	Upper word of the total logical capacity in bytes as formatted
*ioDimmInfoState (trap generated if state = 4)	Current state of the attached client device: unknown(0) detached(1) attached(2), minimal(3), error(4), detaching(5), attaching(6), scanning(7), formatting(8), updating(9), attach(10), detach(11), format(12), update(13)
*ioDimmInfoWearoutIndicator	Boolean: True = device has surpassed the wearout threshold
ioDimmTestMode	Set test mode on or off
ioDimmTestModeIndex	Number indicating the selected
pathname	Path to the driver, set at installation
**traps	Set trap generation on or off
**updateDelay	Number of milliseconds to wait until getting the next value from the ioMemory VSL software to generate a trap

SNMP MIB Support

The following SNMP MIB fields are supported in Windows:

- fusionIoDimmMibRevMajor
- fusionIoDimmInfoAdapterType
- fusionIoDimmMibRevMinor
- fusionIoDimmInfoAdapterPort
- fusionIoDimmMIBCondition
- fusionIoDimmInfoAdapterSerialNumber
- fusionIoDimmInfoIndex
- fusionIoDimmInfoAdapterExtPowerPresent
- fusionIoDimmInfoStatus
- fusionIoDimmInfoPowerlossProtectDisabled

- fusionIoDimmInfoName
- fusionIoDimmInfoInternalTempHigh
- fusionIoDimmInfoSerialNumber
- fusionIoDimmInfoAmbientTemp
- fusionIoDimmInfoPartNumber
- fusionIoDimmInfoPCIBandwidthCompatibility
- fusionIoDimmInfoSubVendorPartNumber
- fusionIoDimmInfoPCIPowerCompatibility
- fusionIoDimmInfoSparePartNumber
- fusionIoDimmInfoActualGoverningLevel
- fusionIoDimmInfoAssemblyNumber
- fusionIoDimmInfoLifespanGoverningLevel
- fusionIoDimmInfoFirmwareVersion
- fusionIoDimmInfoPowerGoverningLevel
- fusionIoDimmInfoDriverVersion
- fusionIoDimmInfoThermalGoverningLevel
- fusionIoDimmInfoUID
- fusionIoDimmInfoLifespanGoverningEnabled
- fusionIoDimmInfoState
- fusionIoDimmInfoLifespanGoverningTgtDate
- fusionIoDimmInfoClientDeviceName
- fusionIoDimmExtnIndex
- fusionIoDimmInfoBeacon
- fusionIoDimmExtnTotalPhysCapacityU
- fusionIoDimmInfoPCIAddress
- fusionIoDimmExtnTotalPhysCapacityL
- fusionIoDimmInfoPCIDeviceID
- fusionIoDimmExtnTotalLogCapacityU
- fusionIoDimmInfoPCISubdeviceID
- fusionIoDimmExtnTotalLogCapacityL
- fusionIoDimmInfoPCIVendorID
- fusionIoDimmExtnBytesReadU
- fusionIoDimmInfoPCISubvendorID
- fusionIoDimmExtnBytesReadL
- fusionIoDimmInfoPCISlot
- fusionIoDimmExtnBytesWrittenU
- fusionIoDimmInfoWearoutIndicator
- fusionIoDimmExtnBytesWrittenL
- fusionIoDimmInfoWritableIndicator
- fusionIoDimmExtnFormattedBlockSize
- fusionIoDimmInfoInternalTemp
- fusionIoDimmExtnCurrentRAMUsageU
- fusionIoDimmInfoHealthPercentage
- fusionIoDimmExtnCurrentRAMUsageL
- fusionIoDimmInfoMinimalModeReason
- fusionIoDimmExtnPeakRAMUsageU
- fusionIoDimmInfoReducedWriteReason
- fusionIoDimmExtnPeakRAMUsageL
- fusionIoDimmInfoMilliVolts
- fusionIoDimmWearoutTrap
- fusionIoDimmInfoMilliVoltsPeak
- fusionIoDimmNonWritableTrap
- fusionIoDimmInfoMilliVoltsMin
- fusionIoDimmTempHighTrap

- fusionIoDimmInfoMilliWatts
- fusionIoDimmTempOkTrap
- fusionIoDimmInfoMilliWattsPeak
- fusionIoDimmErrorTrap
- fusionIoDimmInfoMilliAmps
- fusionIoDimmPowerlossProtectTrap
- fusionIoDimmInfoMilliAmpsPeak

Sample SNMP Monitoring

As a data-source management tool, the SNMP agentx provides information that you can integrate into existing management applications. This example shows how an organization adapted their current management application to use certain SNMP traps and SNMP MIBs to monitor all of the ioMemory devices installed in their network.

Condition	Trap or MIB	GREEN	YELLOW	RED
Device Status	fusionIoDimmInfoState: 2.1.1.1.12	attached(2)	detached(1), detaching(5), attaching(6), scanning(7), formatting(8), or updating(9)	minimal(3) or error(4)
Minimal Mode Reason	fusionIoDimmInfoMinimalModeReason: 2.1.1.1.30	7	N/A	Any other value
Power Loss Protection	fusionIoDimmInfoPowerlossProtectDisabled: 2.1.1.1.43	2	N/A	Any other value
Temperature	fusionIoDimmInfoCurrentTemp: 2.1.1.1.24	<90	90-96	97
Health Reserves	fusionIoDimmInfoPercentLifeRemaining: 2.1.1.1.25	>10	4-10	<4
Wearout Indicator	fusionIoDimmInfoWearoutIndicator: 2.1.1.1.21	2	N/A	Any other value
Writeable Indicator	fusionIoDimmInfoNonWritableIndicator: 2.1.1.1.23	2	N/A	Any other value
PCI Power Compatibility	fusionIoDimmInfoPCIPowerCompatibility: 2.1.1.1.46	2048	16	0

Part Number: D0005268-004_5
Printed in the USA

© Copyright Lenovo 2015. Lenovo and the Lenovo logo are trademarks of Lenovo in the United States, other countries, or both.

© Copyright International Business Machines 2015. All rights reserved.

Copyright © 2015 SanDisk Corporation. All rights reserved. SanDisk is a trademark of SanDisk Corporation, registered in the United States and other countries. Fusion ioMemory, VSL and others are trademarks of SanDisk Enterprise IP LLC. Other brand names that may be mentioned herein are for identification purposes only and may be the trademarks of their respective holder(s).