



HOME

User Manual

DELMIA Process Engineer[®]

Web Service Installation



Foreword

This manual provides an introduction to the basic operations and functions of the Web Service Installation.

While developing these functions we have made every effort to create a clearly organized, easy-to-understand program structure.

A user-friendly interface as well as a clear menu guide will enable you to quickly learn how to operate the program and to get familiar with its functions so that you can carry out your planning tasks in a quick and reliable way.

No Liability or Guarantee

Our programs and manuals have been compiled with great care and to the best of our knowledge. They have also been tested in a production setting. However, we assume no liability and provide no guarantee that the software and related descriptions are free of error or are suitable for special purposes.

DELMIA assumes no liability for any damage that may arise from the use of this software. By using this software, the user acknowledges this exclusion from liability and shall hold DELMIA exempt from all claims.

Copyright

The information in our documents may be copied and distributed for internal purposes provided it is done free of charge and the contents are not altered or distorted.

Any other form of usage, especially the sale on CD-ROM or in any other publication in whole or in part is only permitted after prior written consent by DELMIA.

Some parts of this software are owned by Unigraphics Solutions Inc. and are copyrighted © 2011. All rights reserved.

Some parts of this software are owned by combit® GmbH and are copyrighted. Report-/Print module List and Label® Version 15.0: Copyright combit® GmbH 1991-2011.

Modifications

Moreover, DELMIA retains the right to make modifications and improvements to the product described in this manual at any time without prior notification.

DELMIA and the 3DS logo are registered trademarks of Dassault Systèmes or its subsidiaries, in the United States or other countries.

This clause applies to all acquisitions of DASSAULT SYSTÈMES commercial computer software by or for the United States federal government, or by any prime contractor or subcontractor (at any tier) under any contract, grant, cooperative agreement, or other activity with the federal government. By accepting delivery of this software, the United States government hereby agrees that this software qualifies as “commercial” computer software within the meaning of the acquisition regulation(s) applicable to this procurement. The terms and conditions of the DASSAULT SYSTÈMES standard commercial end user license agreement shall pertain to the United States government's use and disclosure of this software, and shall supersede any conflicting contractual terms and conditions. If the DASSAULT SYSTÈMES standard commercial license

fails to meet the United States government's needs or is inconsistent in any respect with United States Federal law, the United States government agrees to return this software, unused, to DASSAULT SYSTÈMES. The following additional statement applies only to acquisitions governed by DFARS Subpart 227.4 (October 1988): "Restricted Rights – use, duplication, and disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252-227-7013 (Oct. 1988)."

© 2001-2011 Dassault Systèmes - All Rights Reserved

Table of Contents

1. Introduction	1
1.1 How to Use this Manual	1
1.2 Documentation Conventions and Symbols	1
1.3 New Functions in IPD Web Server Installation	2
2. Prerequisites	3
3. General Installation Steps	4
3.1 Installation Directories	4
3.2 Installation Steps	5
3.3 First Installation (Prerequisites)	5
3.4 Update an Existing Installation	6
3.4.1 Unregister the Transaction DLL	6
3.5 Main Installation	6
3.5.1 Automated Part of Installation	7
3.5.2 Manual Part of Installation	7
3.5.3 Permissions	7
3.6 DCOM Configuration	9
3.7 Environments with Multiple Web Services (Usage of SSO)	9
3.7.1 Service Directory URL	9
3.7.2 Publish All Services into the Service Directory	9
3.7.3 Publishing of SSO Web Services is a Special Case	11
3.7.4 Localization	12
3.8 Log Files of IPD Web Services	12
3.8.1 Activating Debug Traces	12
3.9 Testing the Installation	14
4. Working with IPDWebservice on a Machine with IIS7	15
4.1 Enabling 32 bit Application Pool on a 64 bit Machine with IIS7	16
5. Glossary	17
List of Figures	18
Index	19

1.Introduction

This IPD Web Services Installation Manual should explain to you in a simple and understandable manner how to install and set up the IPD Web Services so you can use it when working with DELMIA software.

IPD Web Services is a middleware component for the IPD Server. It provides access to the IPD Server for other software components, like Clients or other Servers, which have to synchronize with IPD. IPD web Services is not a standalone product and comes without any user interface except that one for installation and configuration.

The usage of the product only makes sense, if used in scenarios integrated with IPD Server and the clients of IPD Web Services. In such scenarios each software component comes with its own documentation on setup and configuration.

One example of such scenarios is Common Change Management (CCM), in which the LCA Server has to communicate with IPD Server. Therefore it needs IPD Web Services installed on the IPD Server.

1.1 How to Use this Manual

This manual enables you to get familiar with the operation and functions of the Process Engineer. This manual briefly describes:

- IPD Web Server Installation



Note

When handling the IPD Web Server Installation functions, please also refer to the general introduction to Process Engineer in the General Introduction Manual.



Click [General Introduction](#) to access the manual.

1.2 Documentation Conventions and Symbols

The symbols used in this manual are intended to provide you with keys to the contents in an immediately understandable manner.



This symbol is used to introduce key concepts that are covered in the sections immediately following this symbol. As a result, this symbol most frequently appears at the beginning of chapters or sections.



Note

This symbol is used to mark notes, which provide you with additional information you need to have for further work. You will either find the Note sign at the beginning of a chapter or in a particular text passage in the chapter. Texts

bearing this sign are additionally marked with **Note**. The text is always in italics.



Caution

*This symbol indicates that the text that follows describes particular circumstances that you must avoid to avoid potential errors with the operation of the program or harm to data. You will either find the Caution sign at the beginning of a chapter or near a particular text passage in the chapter. Texts that are introduced by this sign are additionally marked with **Caution**. The text is always in italics.*

Example

This symbol marks examples which serve to illustrate a certain situation.

1

This symbol marks the individual operational steps involved in a particular operating instruction. Operating instructions describe operational steps, for example, how to open a menu or execute a function.



This symbol marks listed subjects. The symbol for listed subjects can be either used to structure a continuous text or to list main subject keywords.



This symbol marks list inside a bulleted or numbered list.



This symbol marks cross reference information that is available in another manual.

1.3 New Functions in IPD Web Server Installation

You can now [install IPD Web Server on a machine with IIS7](#).

2. Prerequisites

Manual Installation Steps Required

IPD Web Services comes with an automated installation program based on Install Shield installer. Anyway there are some additional steps to be done manually before and after this installation program is run. For first installation there are some third party software products to be installed. For updating IPD Web Services there has a manual cleanup to be done.

Environment with other Web Services

IPD Web Services can also be installed along with other DS internal web services, for example SSO web service. Therefore, the configuration of a Service Directory is necessary.

Troubleshooting and Error Diagnostics

In case of failure of the web services there are ways to investigate for the reasons. Also for the developer team debug flags and trace files are important. It is explained how to activate traces and where to find the output.

This chapter provides you with information necessary to customize the Manufacturing Hub to properly support the Change Management functionality.

The entire customization is done within a plantype set. Furthermore, the paragraph includes additional information about how Default-PRO-DPM-IGR IP_V5_CMC has been prepared.

3. General Installation Steps

3.1 Installation Directories

The installation of IPD Web Services installs software to the hard disc and configures the underlying operating system. The most important locations are:

- **wrkspc** ... Directory, which contains the IPD Web Service software. The location of that directory can be chosen during the automated installation software.
- **wrkspc/ logs** ... In that directory there are two important log files: SystemErr.txt for error traces and SystemOut.txt for debug traces.
- **wrkspc/ToolsData** ... This directory contains persistent data, that is necessary for the DS internal web service infrastructure. For example environment variables and list of activated traces is stored inside it.
- **Wkspc**...This directory contains the *WebServiceVersionInfo.txt* file. This read-only file provides Web Service Version information. The Version information can also be seen in an event viewer.

After Web service is invoked, perform the following steps to view version information in event viewer:

- 1) Go to Windows Event Viewer.
- 2) Select **WebServiceVersion**.
- 3) Double click **Information**.

The **Event Properties** dialog box comes which contains the version information.

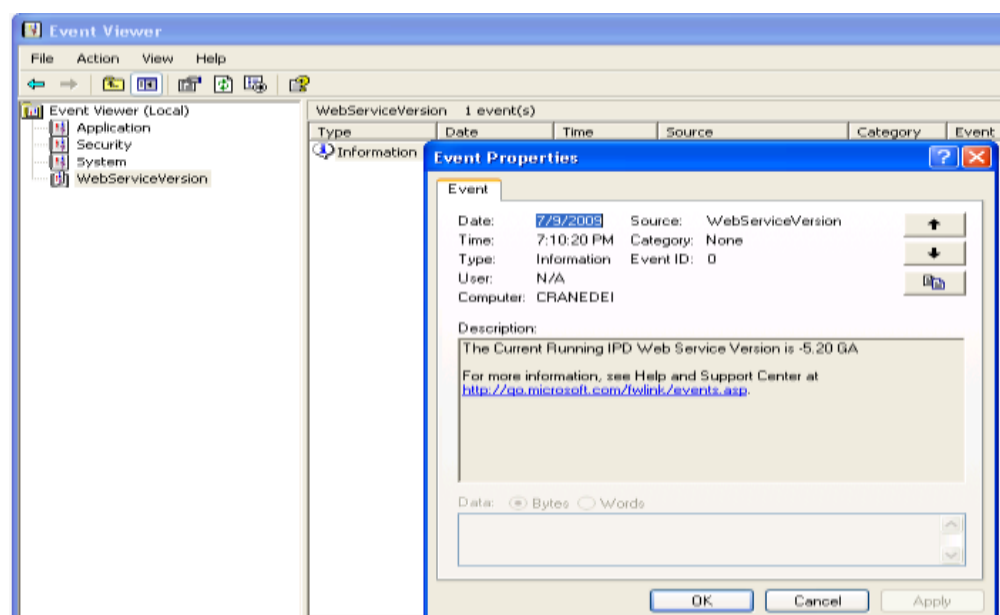


Figure 1: WebServiceVersion information in Event Viewer

- **Virtual directory in IIS** ... IPD Web Services are accessed via HTTP. Therefore the installation routine creates a virtual directory that points to the wrkspc directory.

- **Registered CATJsyTransaction.dll ...** This software component is registered in the COM+ Dll registry of Microsoft Windows.

3.2 Installation Steps

For installing IPD Web Services there is an automated installation program based on Installshield software. The usage of this program is described in **'Main installation'**.

Before you start with 'Main installation' you have to check whether it is the first time the software is installed or it is an update. In case of first installation, start with the chapter ['First Installation \(Prerequisites\)'](#). In the latter case start with ['Update an Existing Installation'](#).

If you are not sure, begin with ['First Installation \(Prerequisites\)'](#) and continue with ['Update an Existing Installation'](#) and then do the ['Main Installation'](#).

In all cases you have to check the DCOM configuration of Microsoft Windows. More information you can find in the chapter ['DCOM Configuration'](#).

All the actions mentioned above are mandatory for a working IPD Web Services environment. In special scenarios you have to follow the instructions in chapter ['Environments with Multiple Web Services \(Usage of SSO\)'](#). If there are clients, that use other V5 internal web services beside IPD Web Services (like SSO for example), a special set up of the so-called Service Directory must be done.

3.3 First Installation (Prerequisites)

Installation of IIS (Internet Information Server) including FPSE (FrontPage server extensions). You may need the Windows 2003 Media to perform the following steps.

- 1) Click **Start > Settings > Control Panel > Add/Remove Programs > Add/Remove Windows Components**.
- 2) Check **Application Server**.

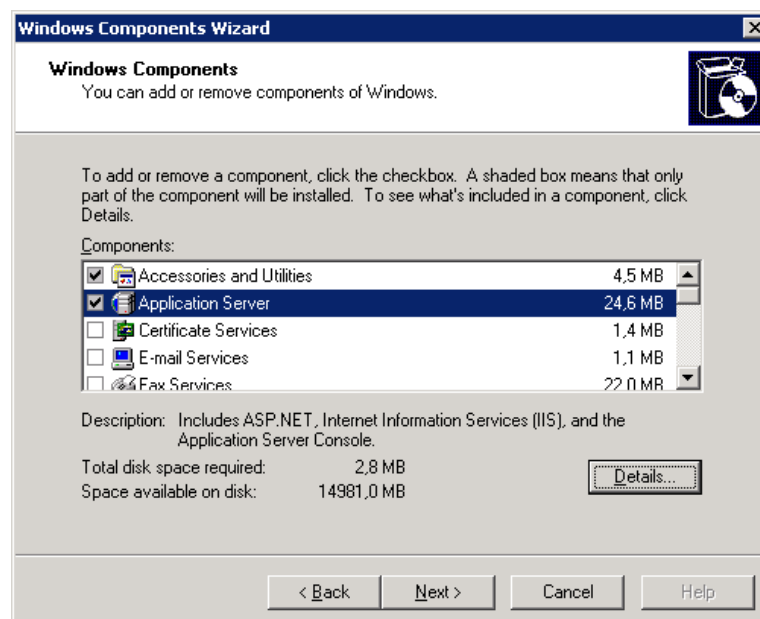


Figure 2: Application Server

- 3) Click **Details** and assure that the following check boxes are selected.
- 4) Click **OK**, '**Next**' and complete the IIS installation.

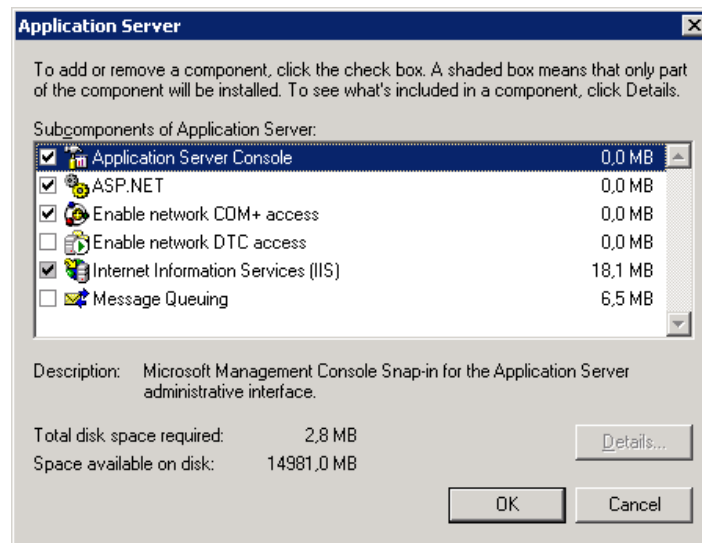


Figure 3: Application Server Console

- 5) Continue with chapter '[Main Installation](#)'.

3.4 Update an Existing Installation

If IPD Web Services have already been installed on the machine you have to remove the previous installation before in the following way. This approach could differ dependent on the OS language:

- 1) Restart IIS.
- 2) You can do this via the batch file 00_iisrestart.bat in the IPD Web Service installation folder or with the Internet Services Manager.
- 3) Delete the workspace of the old installation.
The workspace directory of IPD Web Services have to be deleted. It's the directory which is referred by the virtual directory in IIS (see next step).
- 4) Remove the virtual directory in IIS.
- 5) **Start->Control Panel->Administrative Tools->Internet Information Services Expand to 'Default Web Site'** Delete the existing web project 'IPDWebService'.

3.4.1 Unregister the Transaction DLL

- 1) On Windows 2003: **Start->Control Panel->Administrative Tools->Component Services Expand to Computers->My Computer->COM+ Applications Delete the existing 'PPR Components' entry.**
- 2) Continue with chapter '[Main Installation](#)'.

3.5 Main Installation

The main installation consists of an automated part that is done by an installation program on the media and of a manual part. Additional steps may be

required for granting access permissions to the local ASPNET user which is created during the .NET installation.

3.5.1 Automated Part of Installation

Execute setup.exe and follow the instructions of the installation software.

During the installation procedure the installer may ask you to confirm the installation of two prerequisite products:

- **Microsoft .NET 2.0** Redistributable Package
- **Microsoft J# Runtime** Redistributable Package



Note

In release R16 or later there is no need any more to specify a host name during the setup process as compared to R15.

3.5.2 Manual Part of Installation

After the automated installation procedure the following Software updates must be installed manually:

- Microsoft .NET Framework 2.0

3.5.3 Permissions

You have to make sure the local user ASPNET has full access to the IPD Web Service installation directory and all its subdirectories. This can be done by following these steps:

- 1) Navigate to the directory where IPD Web Services are installed. It is the directory, which was specified during the automated installation process.
- 2) For subdirectory 'wrkspc' open the properties.
- 3) On the upcoming dialog box switch to the security tab page.
- 4) Click **Add** button.
- 5) Add the machine user 'ASPNET' and confirm with **OK**. Make sure, that you really add the machine user and not the domain user.
- 6) Give this user full control, as shown in the [Figure 4](#).

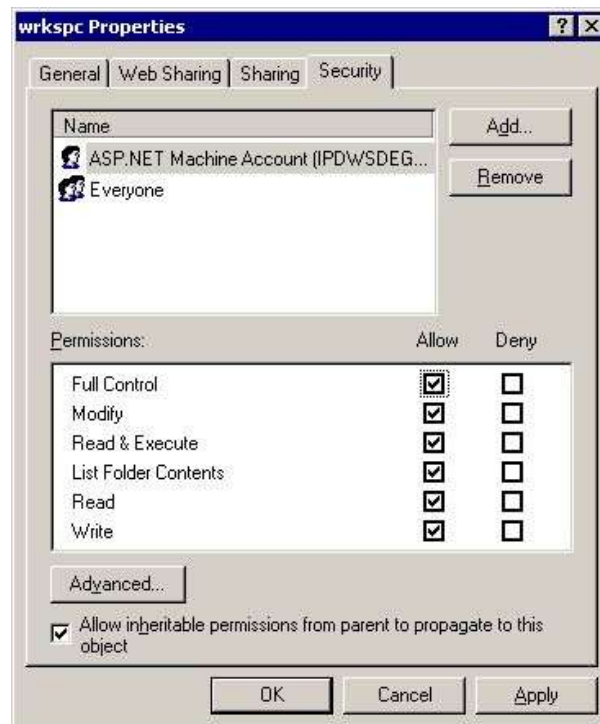


Figure 4: WrKSPC Properties

Also give the user access to all subdirectories by clicking on the **Advanced** button and selecting the lower check box on the upcoming dialog boxes.

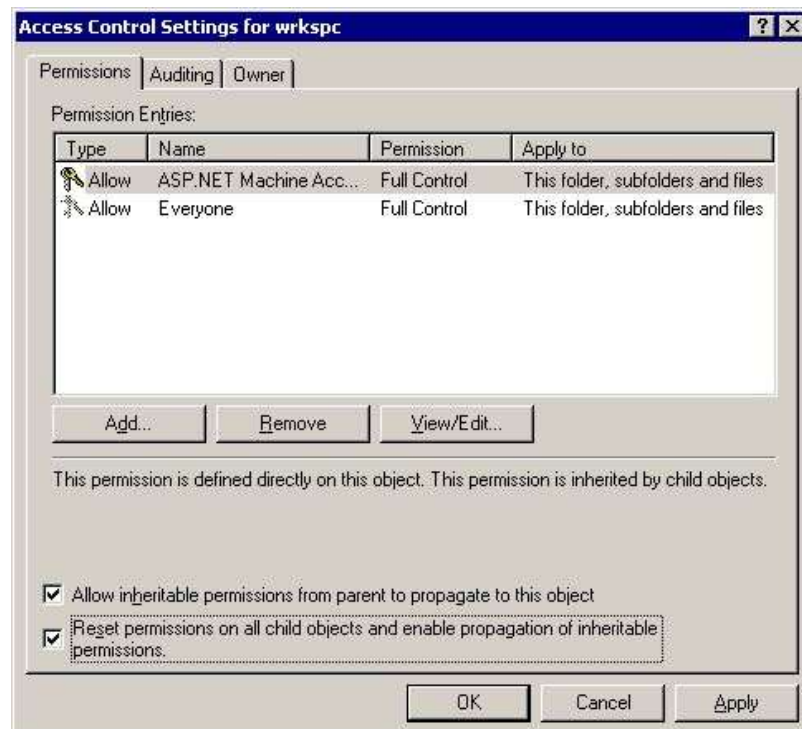


Figure 5: Access Control Settings

7) Close all dialog boxes by clicking the **OK** button.

In addition, the local ASPNET user must have "Read & Execute" permission for the complete PPR Server installation directory (e.g. ...\\Delmia\\PPRServer); the same requirement accounts for the PPR Client directory if a DPE Client is

installed on this machine. This is necessary because the ASPNET user needs to launch/access certain IPD server processes (DPE pooling server).

3.6 DCOM Configuration

- 1) Run DCOM config tool (Start – Run... - „dcomcnfg“)
- 2) On Windows 2003: Expand to Computers->My Computer->DCOM Config
ble click on each ,DPE ...' entity.
 - Tab 'Identity': Select ,this user' – type in a valid domain user in the following form <windows-domain>\<windows-user>Also type in the valid password twice.
 - Tab 'Security'. In the frames 'access permissions' and 'launch permissions' select “user defined...” and click **Edit**.
- 4) Click **Add...** and add the local user 'ASPNET'
- 5) Close all boxes with **OK**.

3.7 Environments with Multiple Web Services (Usage of SSO)

If the IPD Web Service clients shall consume also other V5 web services it is necessary to use a V5 Service Directory which coordinates all the web services taking part in the scenario.

Therefore, each server participating in the multiple server scenarios needs to be configured manually after installation. This can be done in two steps.

3.7.1 Service Directory URL

Choose one of the web service hosts to act as Service Directory. Find out the web services URI of this host. This looks like
`http://<server>:<port>/<contextPath>`



Note

That <server> is the fully qualified domain name under which the server is reachable. This URI must be used in the next step for all web service hosts.

3.7.2 Publish All Services into the Service Directory

Begin with the web service host, that acts as Service Directory and repeat it on each of all web service hosts participating in the scenario.

- In a web browser open the configuration URL for the Service Directory.
- `http://<server>:<port>/<contextPath>/html/ServiceDirectory`



Note

Be careful, that you do not confuse URLs here: This URL is associated to the web service server and is different for each of those.

- Enter the value of “Service Directory URI”.



Note

If the service directory server is secured you have to enter the authentication settings also. If the service directory host can be accessed only via a proxy server, which uses authentication then also the proxy authentication data has to be entered.

- 1) Click **Save settings**.

**Figure 6: Security Directory
Publish the Web Service**



Note

For the SSO host please skip this step and continue – Please refer to the [Publishing of SSO Web Services is a Special Case](#)

- Open the page ‘Publish web services’ ([Figure 7](#)).
- Click **Publish all**.
- A message at the bottom of the page shows, whether the publishing was successful or not.

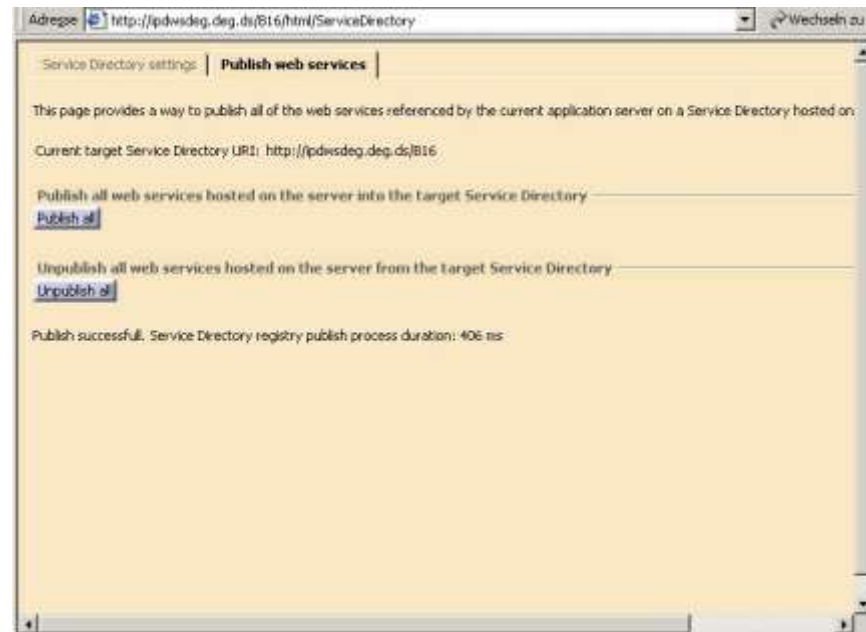


Figure 7: Publish Web Service

3.7.3 Publishing of SSO Web Services is a Special Case

To have an SSO server integrated in a multiple server scenario, you have to use the SSOAdminConsole for publishing.

`http://<server>:<port>/<contextPath>/html/SSOAdminConsole`

After the Servicedirectory URI is defined as described in chapter '[Publish All Services into the Service Directory](#)

' until 'Save settings', the SSO administration application displays two extra buttons: "Publish SSO services" and "Unpublish SSO services". These buttons control the publication/unpublication of the SSO services.

- Click **Publish SSO services**.

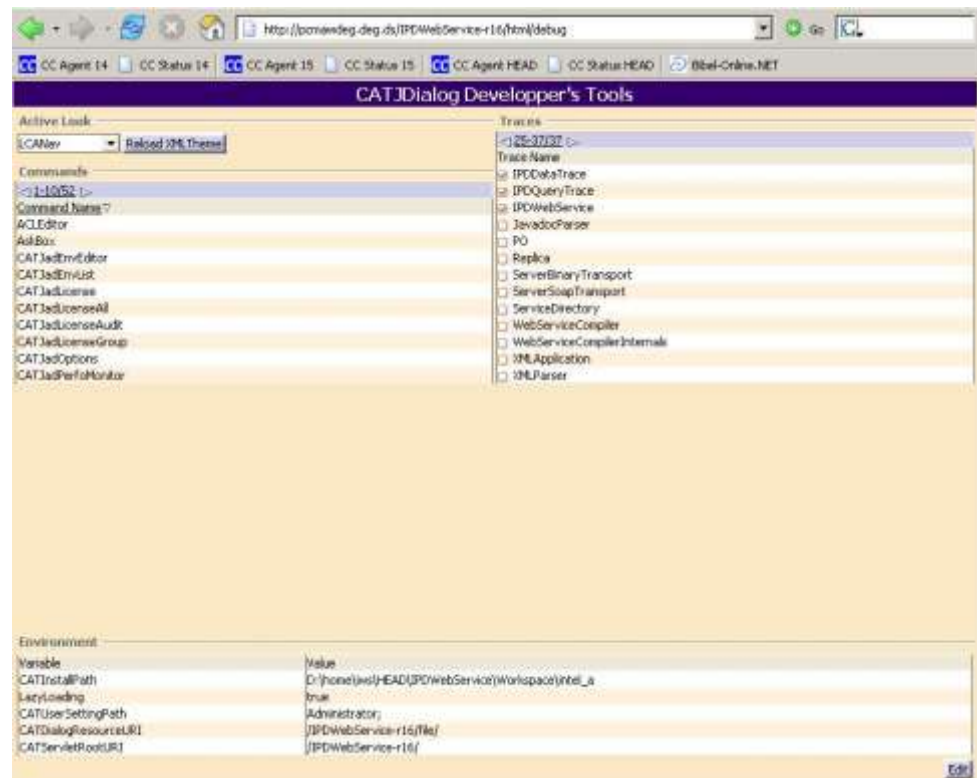


Figure 8: Administrative Console

3.7.4 Localization

The language of the setup can be selected in the beginning of the installation routine. Configuration pages for the Service Directory are in English only. There is no language dependent functionality during the use of IPD Web Services. Error traces are always in English.

3.8 Log Files of IPD Web Services

In this section it is explained, what an administrator can do in order to find out, whether web services work properly or not.

There are two log files in the directory wrkspc/logs. The file SystemErr.txt shows all errors that come from web service infrastructure. Thereby there are two kinds of error tracing. IPD Web Services attach the system date and time to the output and also the original error message.

3.8.1 Activating Debug Traces

If there are errors expected in V5 web services, it is helpful to activate traces to have more detailed information in the mentioned SystemOut.txt:

The traces can be activated with the server application 'html/debug'. Open in a browser the URL:

`http://<machine>:<port>/IPDWebService/html/Debug`

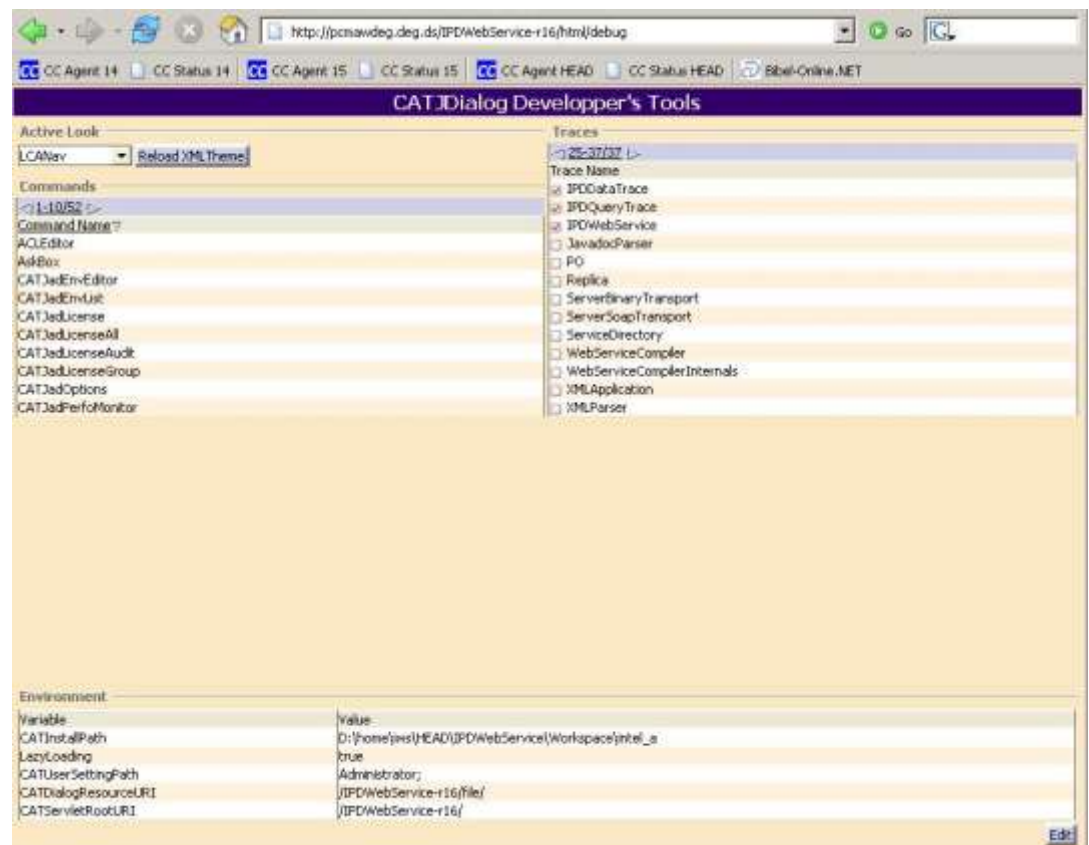


Figure 9: V5 Web Services

In the upper right area there is a list of traces, which are available in the web service software. These traces appear once the code was invoked.



Note

That if there are traces missing, it means that the code is not entered at that time. On the other hand all traces that were previously activated are displayed anyway.

- To activate a trace, simply click on it.
All Traces related to IPD Web Services begin with IPD.

IPDWebService

For each Web Service that is called, the precise date and time is printed out to SystemOut.txt. It is also printed, if the call was successful or not.

IPDDataTrace

Additional data is printed out to SystemOut.txt. For example the invocation parameters of the web services are logged.

IPDQueryTrace

The parameters and results of queries are printed out. This information may help the developer for investigating on errors.

Compatibility

IPD Web Services are compatible with IPD Server from the same build level. Only those IPD Web Services must be used, that are delivered on the DPE Server and Client media. Also all V5 client software, that shall access IPD Web Services must be based on the same codelevel. Do not mix up Releases and also Service Packs.

Limitation 1

Only one IPD Web Service installation per IPD Server

IPD Web Services can be installed only once for an IPD Server and must be updated as described in this documentation. On the other hand it makes no sense to have multiple IPD Web Service installations on an IPD Server machine. Clients can only use one IPD Web Service location at one time. It is not possible to switch the IPD Web Service location during the usage of the client.

Limitation 2

Only one instance of IPD Web Services in one Service Directory

It is not possible to publish more than one location of IPD Web Services into a Service Directory. As a result, there is no way to handle things like load balancing.

3.9 Testing the Installation

To verify that the installation was successful, enter the following URL in a web browser:

<http://localhost/IPDWebService/servicerouter>



Figure 10: Web Browser

If the site appears as shown above, the installation was successful.

4. Working with IPDWebservice on a Machine with IIS7

After Installing IPD web service on a machine having IIS7, the classic mode of .NET application pool has to be enabled, because classic mode models the IIS6.0 model in which ASP.NET is an ASP.I add-on to IIS.

To enable the classic mode of .NET application:

1. Go to the IIS manager: **Control Panel->Administrative tools->Internet Information service**
2. Expand **Sites-> Default Website->IPDWebService**
3. Click **IPDWebService**.
4. On the right side, click **Basic Settings**.
5. Select the **Classic.Net App pool** and click **OK**.
6. Restart the IIS
7. [Test the installation](http://localhost/IPDWebService/servicerouter) (<http://localhost/IPDWebService/servicerouter>).

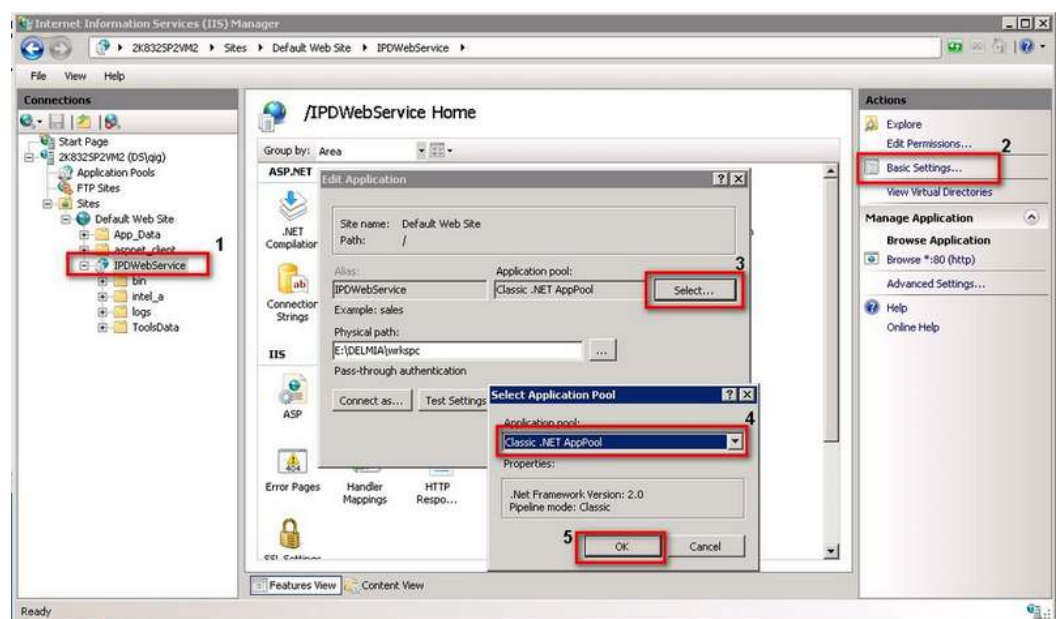


Figure 11: Working with IIS7

Reference information: <http://msdn.microsoft.com/en-us/library/bb515251.aspx>

4.1 Enabling 32 bit Application Pool on a 64 bit Machine with IIS7

IPDWebService is a 32 bit application. For 64 bit OS, 32 bit application pool has to be enabled in the IIS.

To enable 32 bit App Pool, execute:

- `cscript.exe <Inetpub folder>\AdminScripts\adsutil.vbs
set W3SVC/AppPools/Enable32BitAppOnWin64 true`

This enables the IIS on the 64 bit Win Machine to support 32 bit applications..

- `<WINDOWS>\Microsoft.NET\Framework\v2.0.50727>aspnet_reg
iis -i -enable`

This registers the 32 bit dot net frame work with the installed IIS.

Reference information: <http://msdn.microsoft.com/en-us/library/k6h9cz8h.aspx>

5. Glossary

Terms	Description
ASP	The software component of IIS, that runs applications (for example IPD Web Services).
J#	A programming language of NET framework IPD web services is based on J#. Therefore J# run-time has to be installed on the target machine of IPD Web Services
IIS	Microsoft Internet Information Service – the application server from MS Corporation, which is needed for IPD Web Services.
Internal web services	DS software infrastructure for client/server applications that are pure V5 products.
.NET	Multi language featured software development architecture from Microsoft Corporation. Software that is developed within .NET needs the .NET run-time to be installed on the target machine
Service Directory	Software component within DS web services that coordinate multiple web services installed on different locations.
SSO	Single sign on Software provides the enhancement to need to log in only once and be able to use different components of the software without logging in each time. This is based also on web services and used especially in Common Change Management.

List of Figures

Figure 1: WebServiceVersion information in Event Viewer	4
Figure 2: Application Server	5
Figure 3: Application Server Console	6
Figure 4: WtKSPC Properties.....	8
Figure 5: Access Control Settings	8
Figure 6: Security Directory	10
Figure 7: Publish Web Service	11
Figure 8: Administrative Console.....	12
Figure 9: V5 Web Services	13
Figure 10: Web Browser	14
Figure 11: Working with IIS7	15

Index

Nonliability ii