



IBM Software Group

Remote System Explorer in IBM WebSphere Development Studio Client for iSeries

WebSphere. software iSeries AD Team. IBM Toronto Lab
www.ibm.com/software/awdtools/wds400



© 2004 IBM Corporation

Table of contents

Development Studio Client

Remote System Explorer

Subsystems, filters and actions

Editors

Designer

Integrated iSeries Debugger

Summary

This presentation covers first the strategy behind Development Studio Client and is then followed by a review of the Remote System Explorer in Development Studio Client Version 5.1

1988

**In the beginning, there was
PDM and SEU**


```
Columns . . . : 6 76      Edit      RSELAB01/QAPGLESRC
SEU==>                                     PAYROLLG
FMT *  *. 1 ...+... 2 ...+... 3 ...+... 4 ...+... 5 ...+... 6 ...+... 7 ...+.
0000.45 C*****
0000.46 C* Housekeeping, clear display fields and reset indicators.
0000.47 C*
0000.48 C          EXSR      MAIN
0000.49 C* If MAIN is done program ends
0000.50 C          eval      *INLR = *on
0000.51 * MAIN SUBROUTINE
0000.52 C      MAIN      BEGSR
0000.53 C          dou      *INKC
0000.54 C          EVAL      *IN60 = *OFF
0000.55 C          EVAL      EMESS = *BLANK
0000.56 C          EVAL      EMPAPL = *BLANK
0000.57 C          EVAL      PRJAPL = *BLANK
0000.58 C          EVAL      RSNAPL = *BLANK
0000.59 C*
0000.60 C* Write the SELECT format to display.  If end of job requested,
0000.61 C*
```

In the beginning, there was SEU, PDM, SDA, etc


1992

And then came CODE/400!

Not your father's SEU!

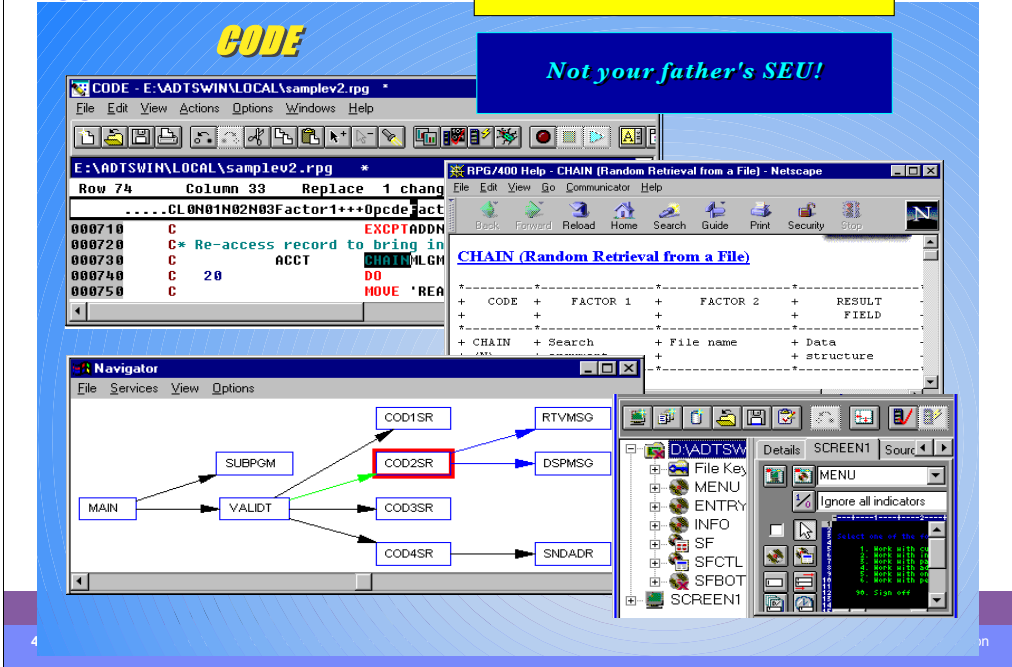

Then came CODE/400, in 1992 on OS/2 and in 1997 on Windows.

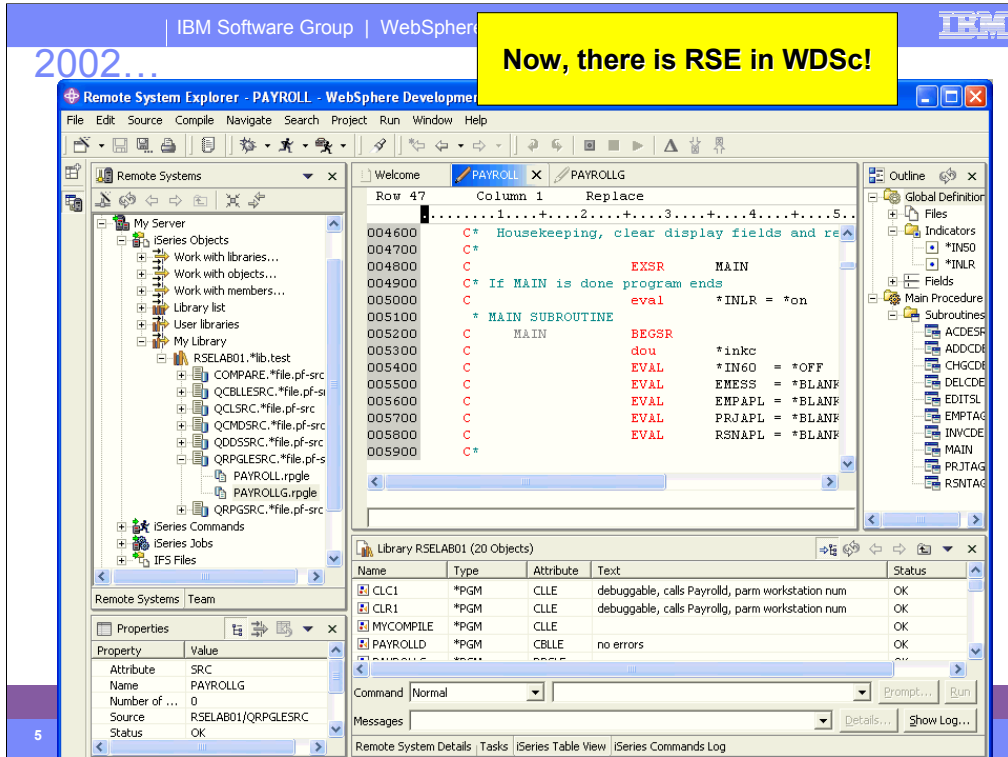

Today, we have the follow-on to CODE... the Remote System Explorer in WebSphere Development Studio Client.

IBM Software Group | WebSphere software IBM

WebSphere Development Studio V5.1

www.ibm.com/software/awdtools/wds400

Unlimited Licenses

iSeries	iSeries	iSeries	iSeries	Web Facing	iSeries Projects
Java	Debug	Struts Web	Web Service	App Server	RSE
Trace	Profiling	DB	XML		

WebSphere Development Studio Client V5.1

RPG	COBOL
C/C++	PDM, SEU SDA, RLU

V5R1 or V5R2: 5722-WDS
No-cost Upgrade 5905 (V5R1)
or 5913 (V5R2)

+CODE
+VisualAge RPG

www.ibm.com/software/awdtools/wds400


6 | iSeries Tools | Remote System Explorer © 2004 IBM Corporation

There is now only one application development product sold by IBM, for iSeries, as of V4R5. This is WebSphere Development Studio (Development Studio), which includes all four host compilers, all traditional tools (ADTS = PDM+SEU+SDA+RLU+DFU+AFP+CGU), and unlimited licenses of the workstation-based toolset named WebSphere Development Studio Client (formerly WebSphere Development Tools).

If you are an existing customer who has a subscription, you can upgrade to Development Studio free of charge. Without a Software Subscription, there is an upgrade fee. New licenses of Development Studio are priced very competitive compared to the combined prices of all constituent products. As of V5R1, there is no way to purchase the compilers or tools individually. So if you have RPG at V5R1 or higher, you must have Development Studio and hence are entitled to Development Studio Client.

For consultants who do not have an iSeries of their own, but still wish to have the client tools, Development Studio Client is also made available as a passport advantage product so it can be purchased "off the shelf" from IBM Direct.

Development Studio has been a huge success, with over 80,000 licenses sold. Just as every development machine used to have PDM and SEU, every development machine will now have all the modern Application Development tools from IBM. This ubiquity is especially important for business partners who build and sell software. These Business Partners are now free to build software using any of the technologies or tools in Development Studio, and can assume their customers will have the tools required to tailor everything from RPG to Java and Web user interfaces. This effectively raises the lowest common denominator to a level unparalleled by any other operating system.

IBM Software Group | WebSphere software 

WebSphere Development Studio Advanced V5.1

www.ibm.com/software/awdtools/wds400

NEW!

Unlimited Licenses

RPG	Cobol
C/C++	PDM, SEU SDA, RLU

V5R1 or V5R2: 5722-WDS
Cost Upgrade 5906 (V5R1) or 5914 (V5R2)

iSeries	iSeries	iSeries*	iSeries	Web Facing*	iSeries Projects
Java	Debug	Struts Web	Web Service	Web Facing*	RSE
Trace	Profiling	DB	XML	App Server	EJB* J2EE*
					Test Cases*


WebSphere Development Studio Client Advanced V5.1

+CODE
+VisualAge RPG

7 | iSeries Tools | Remote System Explorer | © 2004 IBM Corporation

The Advanced edition of Development Studio Client, and Development Studio, is new as of April 25th 2003. Development Studio Advanced is currently the same as Development Studio, except the customer is entitled to unlimited licenses of Development Studio Client Advanced versus just Development Studio Client. Version 5.1 became available on October 17, 2003.

The difference of Development Studio Client Advanced over Development Studio Client is that it has additional tools (blue boxes with asterisks) and some enhancements to existing iSeries tools (green boxes with asterisks) which will be discussed later in this presentation. The majority of the new tools are related to Enterprise Java Bean (EJB) development. You'll see later that Development Studio Client Advanced is based on WebSphere Application Developer (Application Developer) versus WebSphere Studio Site Developer (Site Developer).

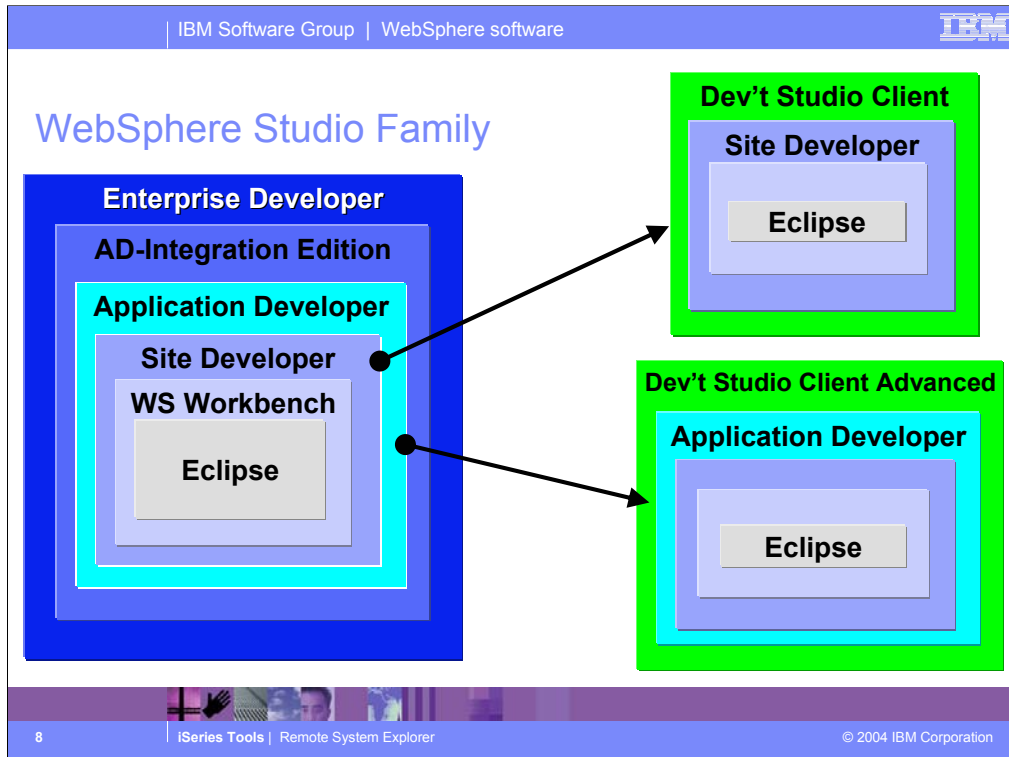

Here you see that Development Studio Client is based on WebSphere Studio Site Developer, while Development Studio Client Advanced is based on WebSphere Studio Application Developer.


The Workbench is based on the open-source Eclipse technology about to be discussed. It is not for sale, but is the basis of all IBM WebSphere Studio products, and is available to business partners.

Site Developer is IBM's entry level offering based on eclipse, and it is for building dynamic Web sites out of non-EJB Java. Application Developer extends Site Developer and adds support for EJBs. Application Developer-Integration Edition extends Application Developer and adds support for JCA Connectors and for Workflow. Enterprise Developer extends Application Developer-Integration Edition and adds support for S/390 and Enterprise Generation Language (EGL), the follow-on to VisualAge Generator.

Eclipse User Interface – Select Perspective

- Users work with **perspectives**
 - Collection of **editor** and **views**
 - Tools for a particular task
 - Allows for role-based development
 - Many perspectives are pre-supplied for specific tasks like Java, Web, XML, RPG/CBL
 - Users can create their own perspectives

- The user interface is very Windows-like
 - Eg: views can be re-sized and re-positioned through drag 'n drop

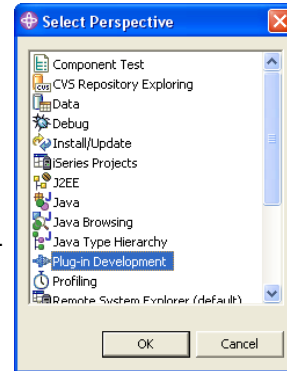

The core features of the Eclipse user interface include perspectives which is a collection of views and tools. Perspectives allow role based development. For example, if you are a Java developer you would use the Java perspective which includes tools and views for Java development. You can also create your own perspectives. Naturally, the Eclipse user interface applies to all Eclipse-based products, like Development Studio Client.

Eclipse User Interface – Perspective

The screenshot illustrates the Eclipse IDE's perspective system. The active perspective (highlighted in blue) contains the following components:

- Editor:** A text editor window displaying a table of data with columns for Row, Column 1, and Replace. The table contains entries like '001900 F* ACDESR - Edit action code for all main'.
- View:** A 'Filter Library list' view showing a table of objects with columns for Name, Type, Attribute, Text, and Status. The table lists objects like 'QSYS', 'QHLP SYS', and 'RSELAB01'.
- Properties:** A properties window showing details for the selected object, such as 'Name: Library list' and 'Number: 8'.

Other open perspectives are shown in the left-hand tray, including 'Remote Systems' and 'Team'. A yellow box labeled 'Active persp'v' points to the active perspective, and another yellow box labeled 'Other open persp'vs' points to the tray. A yellow box labeled 'View' points to the 'Filter Library list' view, and another yellow box labeled 'Other open views' points to the tray.

Row	Column 1	Replace
001900	F* ACDESR	- Edit action code for all main
002000	F*	*****
002100	F*	all externally desc
002200	F*	- maintenance disp
002300	F*	EMPST - employee master f
002400	F*	- PRJMST - project master f
002500	F*	- RSNMST - reason code maste
002600	F*	*****
002700	FMSTDSP	CF E WORKSTN
002800	FEMPST	UF A E K DISK
002900	FPRJMST	UF A E K DISK

Name	Type	Attribute	Text	Status
QSYS	*LIB	PROD-SYS	System Library	OK
QHLP SYS	*LIB			
QUSRSYS	*LIB		System Library for Use	
RSELAB01	*LIB		Library of RSELAB user	
RSELAB02	*LIB		Library of RSELAB user	

An example of an eclipse perspective... the active one contains the editors and views you see. Other perspectives can be open simultaneously, but not active. These are shown in the tray on the left, and can be made active by simply clicking on them. To open new perspectives, use the Window pulldown.

Table of contents

Development Studio Client

 **Remote System Explorer**

Subsystems, filters and actions

Editors

Designer

Integrated iSeries Debugger

Summary


Now you know the story behind Development Studio Client. Lets look at the Remote System Explorer, the tool for iSeries application development and maintenance.

RSE Perspective – PDM Drill down, Filtered Access

- iSeries QSYS artifacts
libraries, objects, members, records, fields, modules, etc
- iSeries Jobs
- iSeries IFS Folders and Files, and QShell Cmds
- Local Folders, Files and Cmds
- Remote Unix, Windows, Linux Folders, Files and Cmds


The Remote Systems Explorer goes well beyond PDM! It also allows exploration of iSeries jobs and commands, and the IFS file system. Further, it can also be used to explore the file system of remote Linux, Unix and Windows systems. The Linux support works for any Linux, including Linux in an iSeries Logical Partition.

RSE Perspective

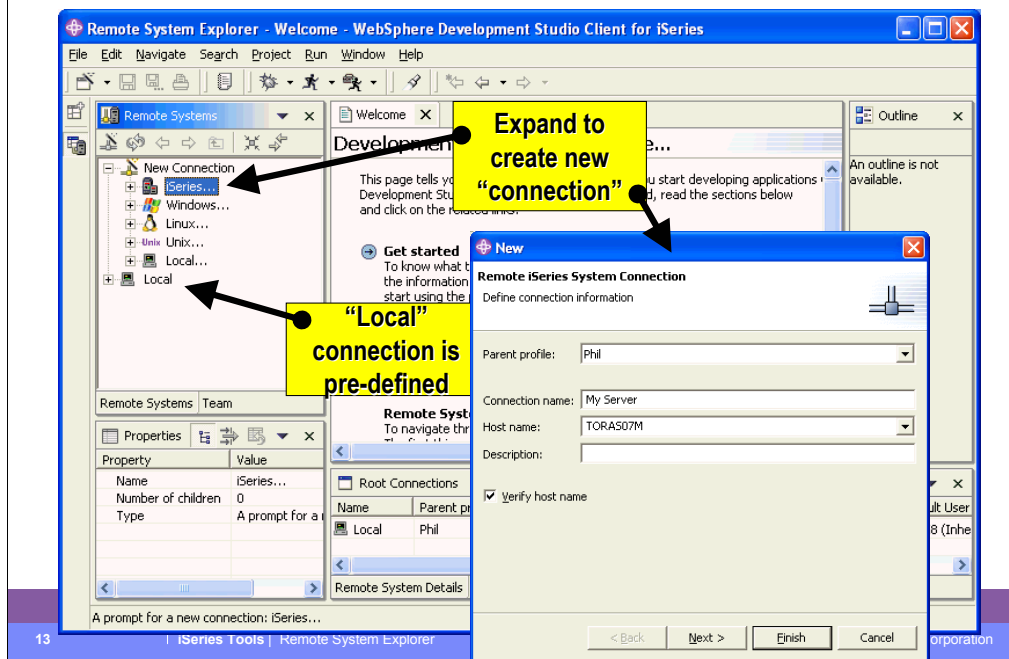

When you first open the Remote System Explorer, you are not connected to any system except your local hard drive on our workstation. To connect to a remote iSeries host, you need to define a connection. In the Remote Systems view you use the New Connection wizard to configure a connection to your iSeries host. You can also use the Remote Systems view to explore the file system of remote Linux, UNIX and Windows systems. The Local connection is pre-defined.

RSE Perspective

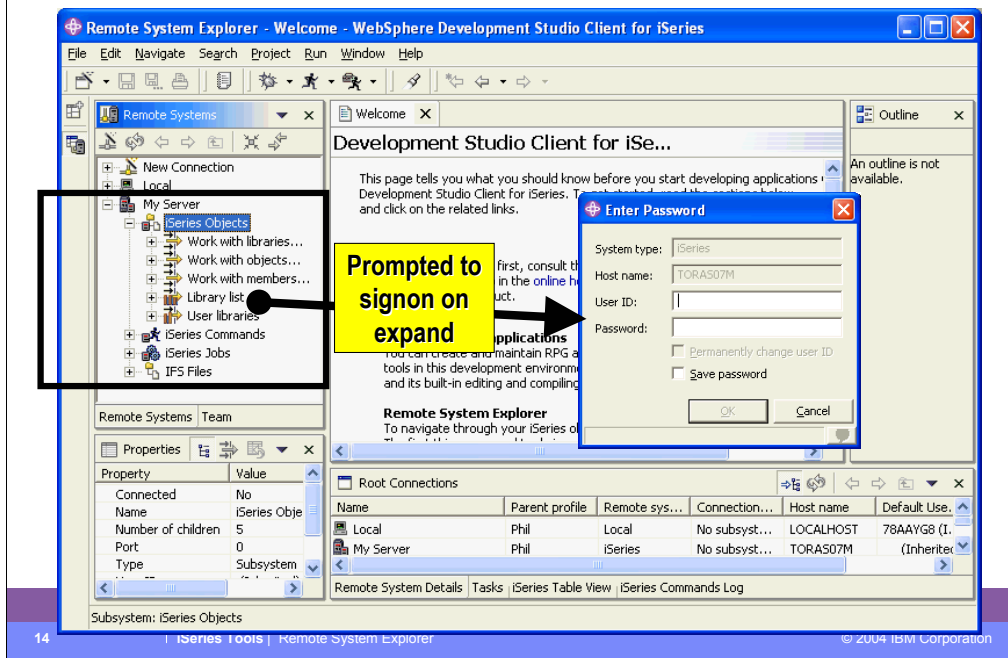

After creating an iSeries connection, and then expanding it to the point where stuff from the iSeries is to be shown, you are asking to signon to the iSeries. You can optionally choose to remember the user ID and password, such that you won't be prompted again for them.

RSE Perspective

Icon changes when connected

Remote System Explorer - Welcome - WebSphere Development Studio Client for iSeries


Development Studio Client for iSeries, V...

Library List

Name	Type	Attribute	Text	Status
CLC1	*PGM	CLLE	debuggable, calls Payroll, parm workstation num	OK
CLR1	*PGM	CLLE	debuggable, calls Payroll, parm workstation num	OK
MYCOMPILE	*PGM	CLLE		OK
PAYROLLD	*PGM	CBLE	no errors	OK

Once a communication session is established with the target iSeries system, the icons for the connection, and the nodes immediately underneath it, change to have a small green arrow indicating you are connected. Of course, you also then can expand to see resources from that iSeries.

What is an RSE “Connection”?



- Represents a remote system
 - Given an arbitrary name
 - Multiple connections to one system permitted
- Contains environment info
 - Such as library list and environment variables
 - Specified in properties dialogs of connection
- Used in many Development Studio Client for iSeries tools
 - RSE, iSeries Projects, Java Tools, Web Tools, WebFacing

A very central concept to all of Development Studio Client for iSeries is that of connections. A connection defines information needed to access a remote system. Each connection is given an arbitrary name by you, and so multiple connections to the same system are permitted. Each connection also captures information that is applied when connecting to that remote system, such as the initial library list for iSeries connections. All iSeries tools within Development Studio Client for iSeries use connections to access a remote iSeries system. Connections are created and managed in the Remote Systems Explorer.

Working with RSE Connections


- Remote Systems view manages connections



Create connections here
(using wizard)

Change, rename, copy,
delete them here

Expand them to work with
resources here

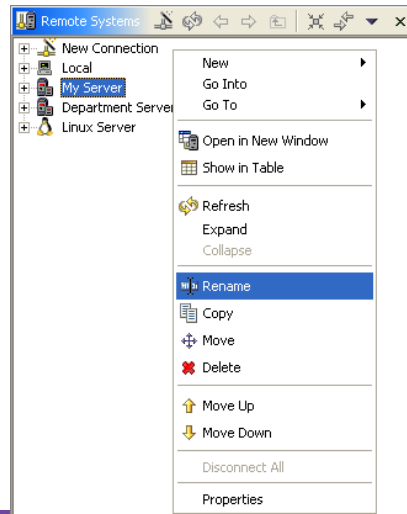


The Remote Systems view is the primary view for managing connections, via right click actions. While this view is normally accessed in the Remote Systems Explorer perspective, you can open any view in any perspective.

IBM Software Group | WebSphere software IBM

iSeries Connections

- Connections expand to
 - “subsystems”
 - Named grouping of functionality
- Subsystems for iSeries connections:
 - ① **iSeries Objects**
 - For working with Libraries, Objects and Members
 - ② **iSeries Commands**
 - For pre-defining and running QSYS command sets
 - ③ **iSeries Jobs**
 - For working with jobs
 - ④ **IFS files**
 - For working with Integrated File System files and commands

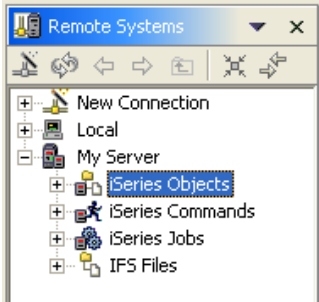

18 | iSeries Tools | Remote System Explorer © 2004 IBM Corporation

Once connections are defined they can be expanded within the Remote Systems Explorer. On expansion, the user sees subsystems, which are merely a functional grouping of the various types of remote resources that can be explored in the remote system

For iSeries connections, there are four subsystems:

- iSeries Objects is the PDM-like grouping, allowing access to libraries, objects and members
- iSeries Commands allows developers to predefine command sets each of which contain one or more often used commands. When run, all commands in a command set are sent to the remote system and executed, and the results are logged in the Commands view.
- iSeries Jobs allows developers to see various jobs, subsettable by job attributes, and to perform a limited number of operations on those jobs
- IFS Files allows developers to explore folders and files in the Integrated File System of the remote iSeries system

IBM Software Group | V Remote Systems

1 iSeries Objects

- For drill-down or filtered access to QSYS
 - Libraries, objects, mbrs
 - Expand lib to see objs
 - Expand file to see mbrs
 - Expand device file to see record fmtns, then flds
 - Expand pgm/srvpgm to see modules
 - Expand msgf to see messages
- Similar to PDM

The screenshot shows the iSeries Objects subsystem interface. The main window displays a tree view of objects under 'My Server'. The tree is expanded to show the 'PAYROLLG' module, which contains several objects including 'PAYROLLG.rpgle' and 'PAYROLLG.rpgle'. The interface includes a toolbar at the top with options like 'Work with libraries...', 'Work with objects...', 'Work with members...', 'Library list', and 'User libraries'. On the right side, there are three yellow callout boxes: 'Create new filters', 'Supplied filters', and 'User filter'. Below these, there are two more yellow callout boxes: 'Objects within expanded library' and 'Members within expanded file'. The bottom of the window shows the 'Remote Systems' toolbar with 'Team' and 'Remote Systems' buttons.


© 2004 IBM Corporation

The iSeries Objects subsystem is the subsystem you will use most often! It is very similar to PDM, in that it allows you to access objects in the QSYS file system, and perform actions on those objects.

1


“Library list” is a pre-defined filter

- For accessing and manipulating libl
 - ✓ Like WRKLIBPDM with *LIBL
 - ✓ Filter actions to add to library list, change current library
 - ✓ Library actions to move within libl, remove from libl, add to libl, change curlib

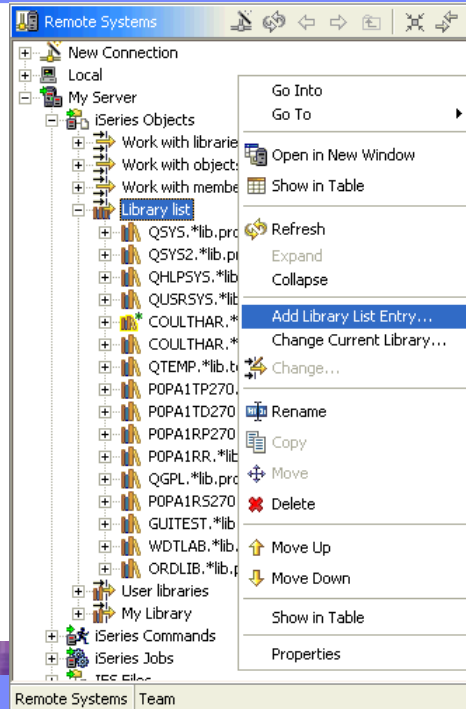

When the pre-defined library list filter is expanded, and the connection is successful, you will see the libraries on your library list. For each library, you can right-click and select from a number of useful actions. There is an action to create a new source file within the selected library, to refresh the contents of the library if it is expanded, to rename the library, copy the library or delete the library. These last three actions remotely run the appropriate iSeries command and you will see it logged in the Command Log view.

If you expand a library, you will see all the objects in that library...

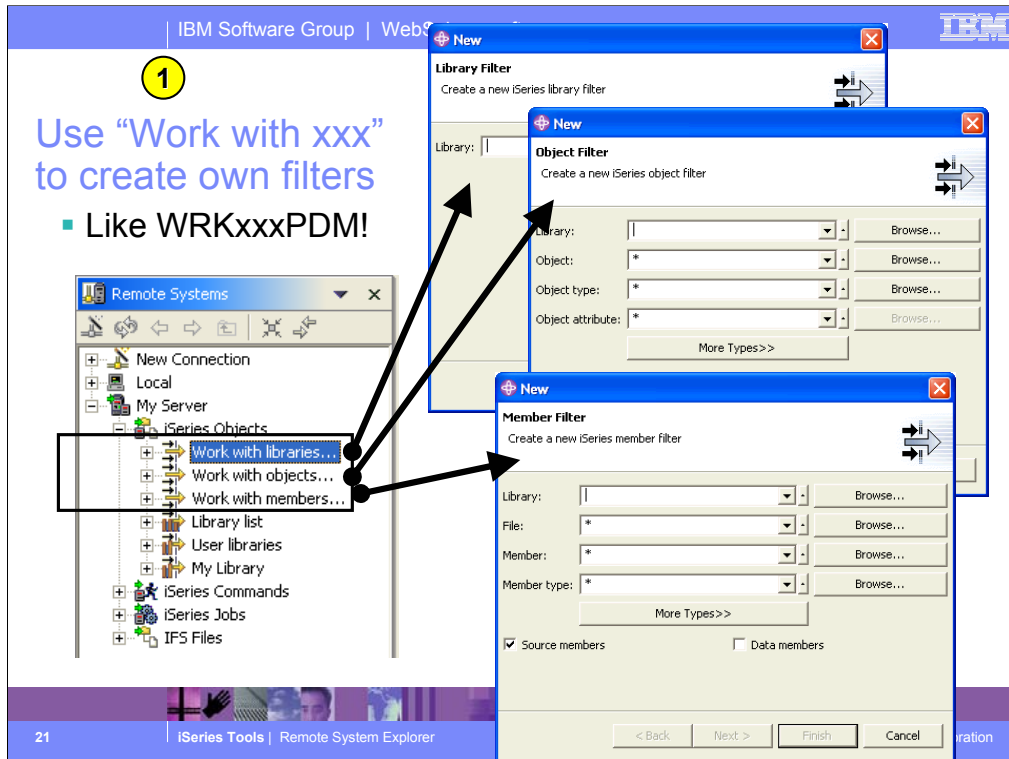

The three child items at the top of the list are for creating filters, much like in PDM:

-Work with libraries... prompts you for a simple or generic library name, and lists all matching libraries. It is similar to WRKLIBPDM.

-Work with objects... prompts you for a simple or generic library name and simple or generic object name, as well one or more object type and attribute pairs. It lists all matching objects in all matching libraries. it is similar to WRKOBJPDM.

-Work with members... prompts you for a simple or generic library name, simple or generic file name, and simple or generic member name, as well as one or more member types which can also be generic. It lists all matching members in all matching files in all matching libraries. It is similar to WRKMBRPDM. Unlike PDM, the filters you create are permanently remembered and displayed in this list for easy re-use. We will have more to say about filters. To simulate STRPDM's option 12, you can start with the pre-defined Library list filter, that when expanded lists all libraries in your library list. With any filter, once it is expanded you can subsequently expand a library to see all objects in the library, and expand files to see all members in the file. When you expand your first filter, such as the pre-defined Library List filter, you are prompted for your password and then connected to the remote iSeries. Then, the results of resolving the filter are shown...

2
iSeries Commands

- For commonly-used commands
- ✓ Create **command set** with one or more CL commands
- ✓ Expand to run commands

Messages resulting from running cmd

Create new command set

Supplied cmd sets

Remote Systems Explorer

22 | iSeries Tools | Remote System Explorer

The iSeries Commands subsystem is merely a place for creating often-used commands. The commands are created in a Command Set, which is simply a named list of commands. By default you are only prompted for a single command, but after creating the command set you can use the Change action to add more commands.

Once a command set is created it appears in the tree. There are a number of command sets pre-supplied by IBM. When a command set is expanded, the commands in it are run and any messages are shown as children of the command set. The commands are also logged in the command log view.

This is only one way to run commands in the RSE. There is also a Command Log where you can enter commands just like a command line on the iSeries. You will see that you can also create user-defined actions that appear in the menu for selected objects and members, just like PDM user defined options.

IBM Software Group | WebSphere software

3 iSeries Jobs

- For accessing jobs
 - Like WRKxxxJOB
 - Create filters to see jobs with specific attributes (right click)
 - Use predefined filters to see your own jobs

The screenshot shows the Remote System Explorer interface. The tree view on the left includes 'Local', 'My Server', 'iSeries Objects', 'iSeries Commands', and 'iSeries Jobs'. Under 'iSeries Jobs', there are sub-nodes for 'Active jobs', 'My active jobs', and 'My jobs'. A right-click context menu is open over the 'iSeries Jobs' node, showing options like 'Refresh', 'Expand', 'Collapse', 'End', 'Hold', 'Release', 'Display job log', 'User Actions', 'Debug As', and 'Properties'. A 'Go To' field is also visible. Yellow callout boxes highlight 'Supplied filters' (pointing to the 'Active jobs' node), 'Job actions' (pointing to the context menu), and 'User filter' (pointing to the 'My jobs' node).

Remote Systems | Team

23 | iSeries Tools | Remote System Explorer | © 2004 IBM Corporation

The iSeries Jobs subsystem is for working with jobs.

As with all subsystems, you can create filters (by right clicking on iSeries Jobs) to see just the jobs you want to see. There are three pre-defined filters for you to see all active jobs, only your active jobs and all your jobs.


The job's icon indicates if it is active, done or queued.

Right clicking on a job allows you to work with the job.

4

IFS Files

- For accessing folders and files
 - ✓ Like WRKLNK
 - ✓ Create filters to see files in specific folders (right click)
 - ✓ Use predefined filters to drill down
 - ✓ Open command console (right click on IFS Files) for QShell

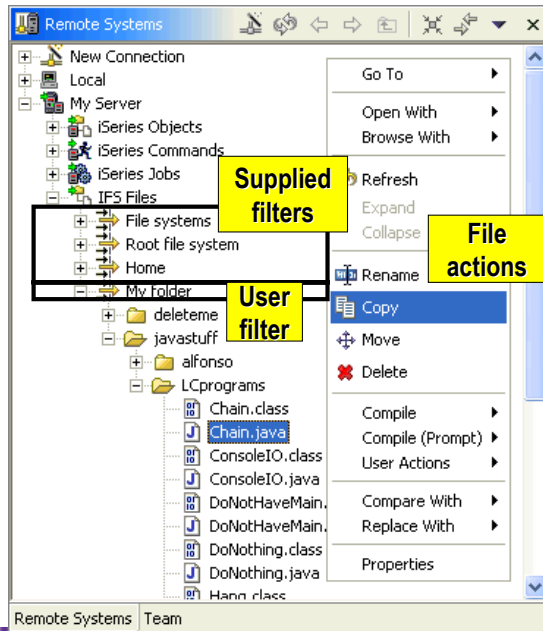

The IFS Files subsystem allows you easy access to IFS folders and files.


Like all subsystems, you can define your own filters and there are some predefined. In this case, the filters allow access to files within a particular folder.

Right-clicking offers access to a very rich set of actions you can perform against the selected folders and files. You can even create your own user actions, as can for the iSeries Objects and iSeries Jobs subsystems.

To run QShell commands, right click on the IFS Files subsystem object and select the Launch Shell action. This opens a command console that is also very rich in function.

SubSystem Properties

- Right click on any subsystem in an iSeries connection to configure it via Properties
 - ✓ Specify compile preferences
 - ✓ Specify environment variables
 - ✓ Specify library list

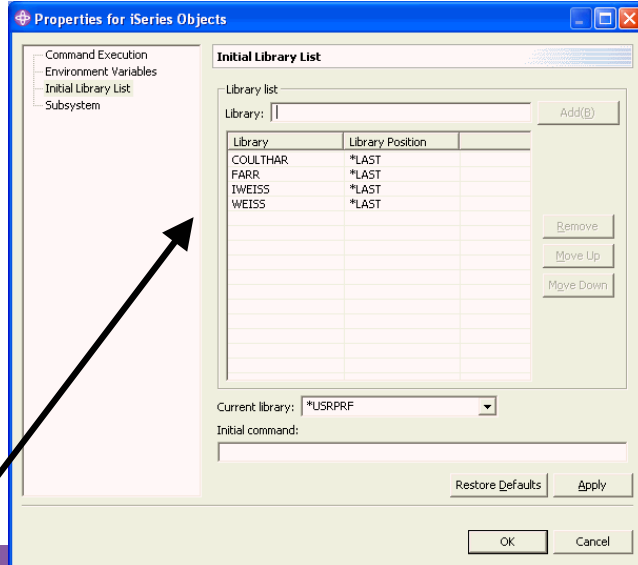

All iSeries subsystems allow you to configure properties via the Properties action in the right-click menu. These properties are run-time properties that are applied when the connection is connected to the remote server.

A popular question is how to setup the library list such that it is set every time, without manual intervention. This is where to do that.

1

iSeries Objects

- The following focuses on using the iSeries Objects subsystem to work with artifacts in your native QSYS file system

Now we drill down on the iSeries Objects subsystem, which is by far the most heavily used.

IBM Software Group

Creating New Things

- Right click for “new” actions
 - ✓ On library filter for new library
 - ✓ On library object for new objects
 - ✓ On file object for new member
 - ✓ On msgf object for new message

My Server

- iSeries Objects
 - Work with libraries...
 - Work with objects...
 - Work with members...
 - Library list
 - User libraries
 - My Library
 - RSELAB01.*lib.test
 - CLC1.*pgm.clle
 - CLR1.*pgm.clle
 - MYCOMPILE.*pgr
 - PAYROLLD.*pgm
 - PAYROLLG.*pgm
 - COMPARE.*file.p
 - EMPM
 - EVFE
 - MSTD
 - MSTD
 - PRJM
 - QCBL
 - QCLS
 - QCMC
 - QDD5
 - QRPG
 - QRPG
 - REFM
 - RSNM
 - MYCC

New

- Source Physical File...
- Message File...
- Data Queue...
- Data Area...
- Object Filter...

iSeries Source Physical File

Create Source Physical File (CRTSRCPF)

Library: RSELAB01

File: MYSRC

Record length: 112

Text:

CRTSRCPF FILE(RSELAB01/MYSRC) RCDLEN(112)

< Back Next > Finish Cancel

27 | iSeries Tools | Remote System Explorer

To create new objects, right click on a library to get access wizards for creating some of the more popular objects for developers. Of course, you can also use the command log or a command set to do this, but these wizards help by simplifying the command.

Working With Things

■ Use right click actions

The screenshot displays four right-click context menus for different object types in the ISeries Tools interface:

- *LIB**: Includes actions like New, Go To, Expand To, Refresh, Expand, Collapse, Add To Library List..., Rename, Copy, Paste, Delete, Show in Table, Change..., Save..., Restore..., User Actions, Create iSeries Project, and Properties(B).
- *PGM**: Includes actions like Go To, Show in Table, Refresh, Expand, Collapse, Rename, Copy, Paste, Move, Delete, Run, Run(Prompt), Update..., Change..., Save..., Restore(B)..., User Actions, Debug As(F), and Properties(B).
- *FILE**: Includes actions like New, Go To, Refresh, Expand, Collapse, Rename, Copy, Paste, Move, Delete, Show in Table, Cache File Descriptions, Change(B)..., Save..., Restore(B)..., User Actions, Add To iSeries Project..., Make Available Offline, and Properties(B).
- MBR**: Includes actions like Go To, Open With, Browse With, Rename, Copy, Move, Delete, Verify, Verify (Prompt), Compile, Compile (Prompt), User Actions, Add To iSeries Project..., Make Available Offline, Compare With, and Properties(B). The 'Compile' menu is expanded to show sub-options: CRTBNDPRG, CRTPRPGMOD, and Work With Compile Commands...

Blue boxes highlight the specific menus and their sub-items. The 'Compile' sub-menu for MBR is also highlighted with a blue box.

These are some of the right-click popup menus, based on object type. This shows how rich the functionality is. Indeed, it is a superset of PDM's functionality.

Properties

- Use Properties view for quick access to common properties

Property	Value
Attribute	TEST
Name	RSELAB01
Number of children	20
Source	QSYS
Status	OK
Text	Library of RSELAB user RSEL
Type	*LIB

Directly editable

- Use Properties dialog for access to all properties

Create iSeries Project
Properties(B)

Properties for RSELAB01

Library Info
Advanced Info
Disk Info
Source and Service Info

Advanced Info


Owner: WDSCLAB01
Primary group: *NONE
Object auditing value: *NONE

Creation information
Created: July 17, 2003 4:13:24 PM EDT
Created by: WEISS
System created on: TORAS07M
System level: V0SR01M00
Domain: *SYSTEM

Change/usage information
Modified: July 17, 2003 4:13:45 PM EDT
Usage data collected: No
Last used date:
Days used count: 0
Reset date:
Allow change by program: Yes
Changed by program: No
Changed by user: Yes

The Properties view is normally in the lower left of your RSE perspective. It is where common information about the selected object is shown, some of which is directly editable, such as the Text property, which changes the text of the object on the iSeries.

For a full set of all the properties, right click and select Properties from the bottom of the object's popup menu

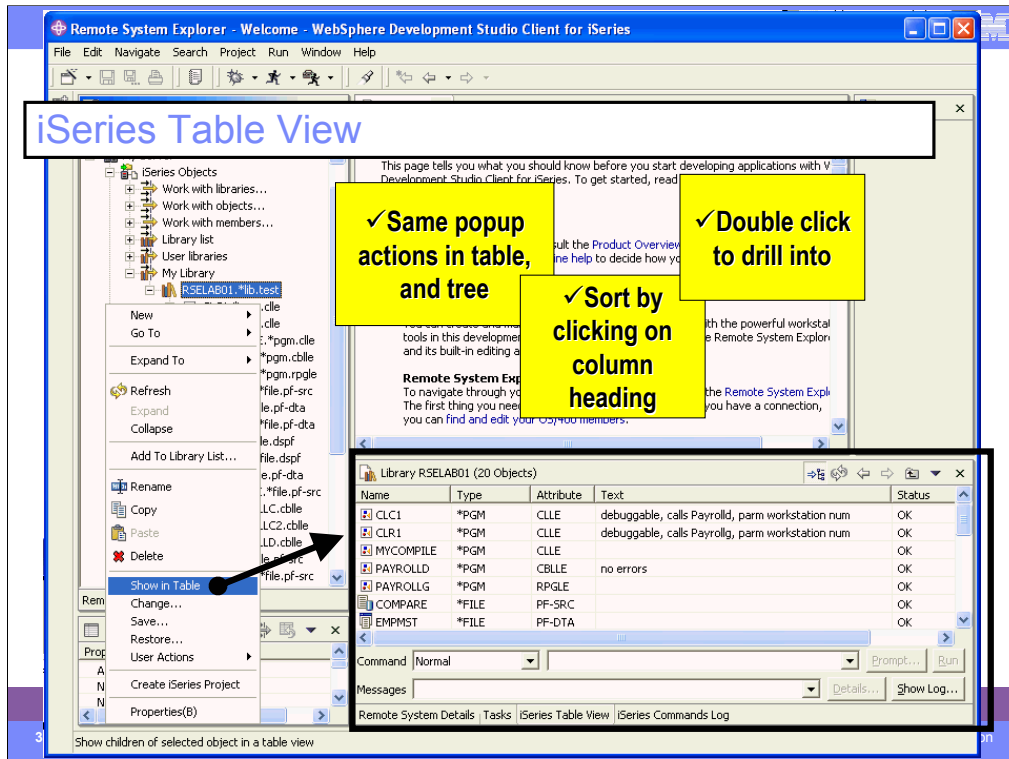


For libraries and files we can use a pop-up menu action to open table views to see the contents of the library or file. In these tables, the columns are attributes for the object or member in each row. The table can be sorted by an attribute by simply clicking on the column heading.

The Show In Table action is available for every tree node that has children.

iSeries Table View


✓ Use local pulldown to see additional columns

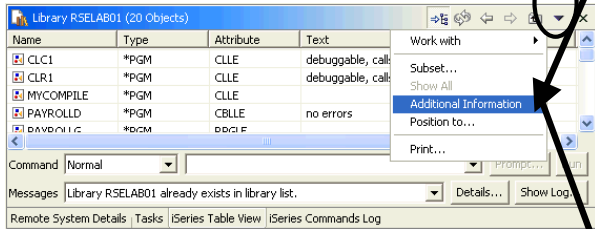

Can also

- ✓ Change contents
- ✓ Subset contents
- ✓ Position list
- ✓ Print list


✓ Just like PDM!

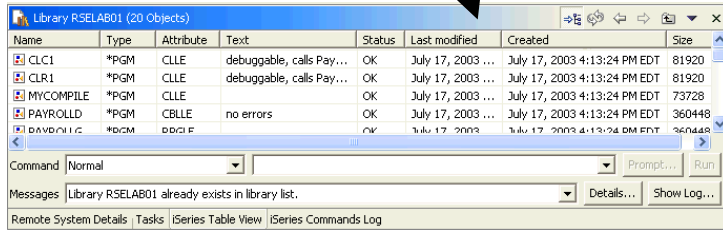

When listing objects in a library, in a table view, you can turn on “Additional information” to see more attributes: date-created, date-changed and size. Combined with the sorting capability, this can be very powerful.

The same little pulldown menu has other actions that PDM users will be familiar with.

iSeries Table View

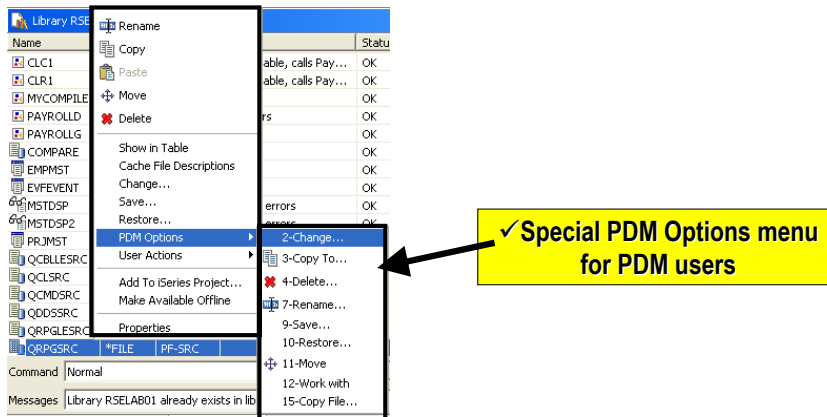

While there is nothing new in this menu, there is a PDM Options menu in the right click menu from the table view, which shows all the actions by the numbers their corresponding option was in PDM, to help with the learning curve of PDM users.

RSE Command Shell

The screenshot displays the RSE Command Shell interface. At the top, a table lists objects in Library RSELAB01. Below the table is a command input field with a dropdown menu set to 'Normal' and the text 'addible test'. To the right of the input field are 'Prompt...' and 'Run' buttons. Below the input field is a 'Messages' section showing the output: 'Library TEST added to library list.' To the right of the messages are 'Details...' and 'Show Log...' buttons. A separate window titled 'iSeries Commands Log' is open, showing the same message and a detailed explanation: 'addible test Library TEST added to library list. Cause : If the ADDLIBLE command was used, TEST was added to the user library list. If the CHGSYSLIBL command was used, TEST was added to the system portion of the library list.'

Name	Type	Attribute	Text	Status
CLC1	*PGM		gable, calls Payroll, par...	OK
CLR1	*PGM		gable, calls Payroll, par...	OK
MYCOMPILE	*PGM			OK
PAYROLL	*PGM			OK
PAYROLLD	*PGM		ors	OK
PAYROLLG	*PGM	RPGLE		OK
COMPADE	*FILE	DE SRC		OK

•Enter command, press Enter
•Use arrows to retrieve commands

Prompt **Run**

Show Log

Command: Normal | addible test | Prompt... | Run

Messages: Library TEST added to library list. | Details... | Show Log...

Remote System Details | Tasks | iSeries Table View | iSeries Commands Log

iSeries Commands Log

My Server

addible test
Library TEST added to library list.
Cause : If the ADDLIBLE command was used, TEST was added to the user library list. If the CHGSYSLIBL command was used, TEST was added to the system portion of the library list.

Command: Normal | Prompt... | Run

Remote System Details | Tasks | iSeries Table View | iSeries Commands Log

Like PDM, there is command line at the bottom of the table, and it can be used to enter command to be prompted and run. When run the results are shown in the messages combo box, and the command log can be seen via the Show Log button.

Note that in 5.1, you can use F4 and F9 in this command shell.

Multi-file Search

Select Search-
>iSeries from
pulldown menu

GUI interface to
FNDSTRPDM

Now supports generic names in 5.1

Often we need to search through members looking for strings. To this from the RSE, there is a dialog to help with it. It supports the same options as FNDSTRPDM ... actually more as it allows generic library and file names (as of 5.1). Indeed, this actually ends up calling FNDSTRPDM to do the search.

Search Result

The screenshot displays the IBM Remote System Explorer interface. The main window shows a table with columns 'Row', 'Column', and 'Replace'. The table contains several rows of data, including 'ELOCN', 'EUSRI', and 'ENHRS'. A yellow callout box with an arrow points to the 'ENHRS' entry in row 104, with the text: "Double click on match entry to open+position in editor".

Below the main table, a 'Remote Search' window is open, showing a list of matches for 'ENHRS' in 9 members. The matches are listed as follows:

- RSELAB01/QDSSSRC(EMPMST) (1 match)
- A ENHRS R (line 18)
- RSELAB01/QDSSSRC(MSTDSP) (1 match)
- A ENHRS R B 11 37REFFLD(RCEMP/ENHRS *LIBL/EMPMST) (line 104)
- RSELAB01/QDSSSRC(MSTDSPV) (1 match)
- A ENHRS R B 11 37REFFLD(RCEMP/ENHRS *LIBL/EMPMST) (line 102)
- RSELAB01/QDSSSRC(MSTDSP2) (1 match)
- A ENHRS R B 11 37REFFLD(RCEMP/ENHRS *LIBL/EMPMST) (line 99)
- RSELAB01/QDSSSRC(REFMST) (1 match)
- A ENHRS 3 1 TEXT('EMPLOYEE NORMAL WEEK HOURS') (line 27)

The 'Remote System Details' window at the bottom shows the following information:

Property	Value
Attribute	TEST
Name	R=PI AR01

The result of searching is a hit-list view where the resulting matches are shown. They can be double-clicked on to open the editor to the line with the match.

RSE Drag and Drop

- RSE has rich support for drag and drop
 - ✓ Same as using Copy and Paste

✓ Within same connection

✓ From tree/table view to editor (5.1)

✓ Between command shell and tree view

✓ Between connections


✓ From tree/table view to filter (5.1)

✓ Between table view and tree view

Here you can see that you can drag and drop files or copy and paste files across multiple file systems, within the same connection and using the Remote Systems view, iSeries Table view or the Command Shell.

RSE: User Actions


- **User-Defined Actions (like PDM!)**
 - Right-click on iSeries Objects or any iSeries object member
 - **Work With User Actions**
 - Create, delete or change user-defined actions
 - Scope them by type and attribute

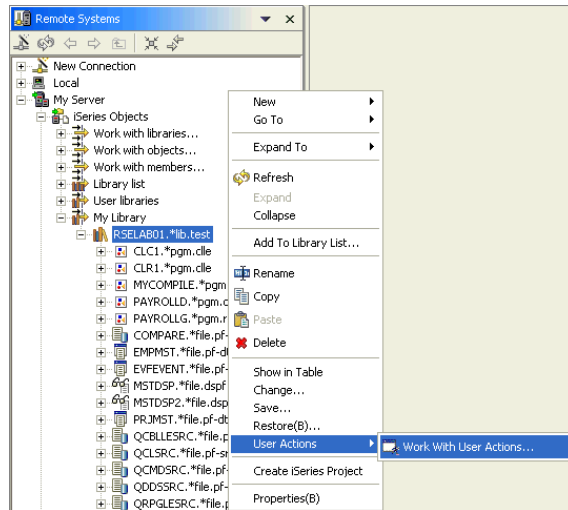

While IBM supplies a number of useful actions for remote iSeries objects, it is not possible to supply them all. Like PDM, you can easily define your own actions. To create your own actions, use the Work With actions in the popup menu for iSeries Objects. These user-defined actions will appear in the popup menus for remote resources. To avoid seeing all actions in all popup menus, you scope each action to a one or more object or member types. You first define named collections of object or member types, then you create your actions and scope them to one of these named collections of types. Your actions will then only appear for object or members that match one of the types in the collection. If you are a CODE user, you can use File->Import to import existing actions from CODE Project Organizer.

You can also create user actions for Jobs and for IFS (or local/windows/unix/linux) folders and files.

RSE: User Actions

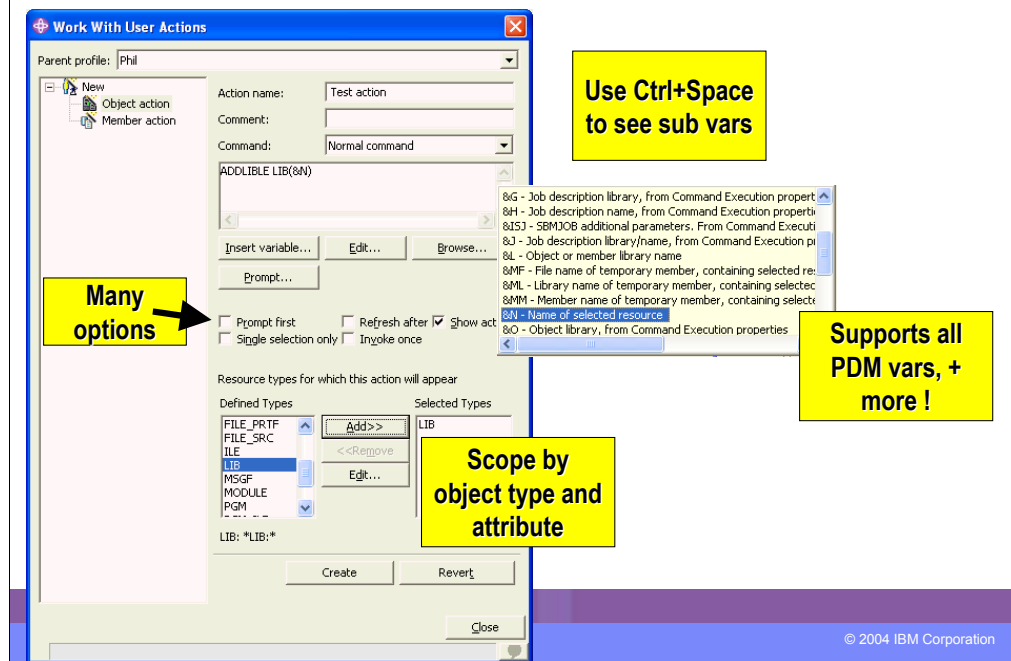

Here is what the dialog that is used to define new user actions looks like.

An action is a name (shown in popup menu), comment, command and a number of options.

All PDM's substitution variables are supported plus additional ones. Use Ctrl+Space, or press Insert variable, to see all the available variables.

Actions are scoped such that they only appear in the menus for the objects and members they apply to. This is better than PDM allows. Also, you can specify if the command should be prompted before running, whether to refresh the list after running the command, and whether the action should only appear if one item is selected, or what to do if multiple items are selected.

Use your action you just created!

The screenshot shows the IBM iSeries Tools interface. On the left, a tree view displays a hierarchy of objects under 'My Server', including 'Series Objects', 'Library list', and 'My Library'. A context menu is open over the 'RSELAB01.*lib.test' object, with the 'User Actions' menu item expanded to show a 'Test action' option. An arrow points from the 'Test action' menu item to the 'Series Commands Log' window. The log window displays the following text:


```
ADDLIB LIB(RSELAB01)
Library RSELAB01 already exists in library list.
Cause . . . . . : The library RSELAB01 already exists in the library search list. The library was not added.
Recovery . . . . . : If RSELAB01 is the library you specified omit the command. If you did not specify library
RSELAB01 then change the library name (LIB parameter). Then try the command again.
```

The log window also shows a 'Command' field with the value 'Normal' and 'Prompt...' and 'Run' buttons.


Once your action is defined, you can use it. Right click on an object matching one of the types you specified, and expand the User Actions menu in the pop-up. Your action appears in the menu. Select it. If you chose to prompt the command, you will see the GUI prompt for the command. When the command has finished running, its results are logged in the Commands view.

Remote System Explorer

Editors



Editors

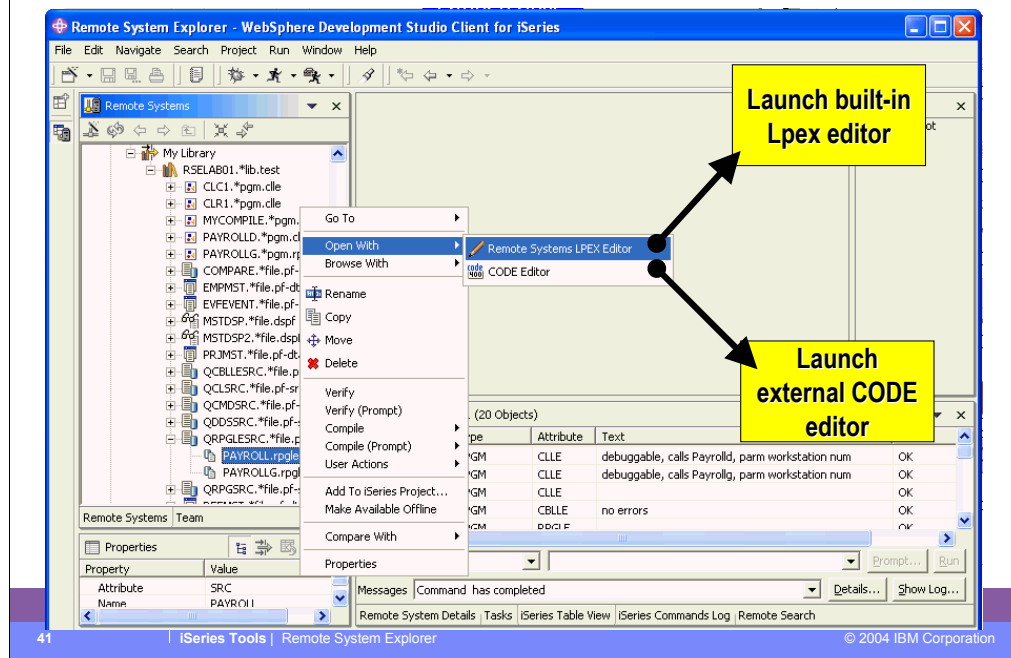


For a source member, there are two options for editing:

1. Remote Systems LPEX Editor. This is the new editor, written all in Java, that is built-in to the IDE. It is a re-write of the original CODE Editor, but as you will see has a subset of the functionality in CODE at this point.
2. CODE Editor. This is the classic full-functioned CODE editor, which is offered as an alternative until the Lpex editor catches up to the functionality of the CODE editor. This launches the CODE Editor in a separate window.


We will cover the Remote Systems LPEX editor next in more detail...

LPEX ("JLPEX") built-in IDE editor

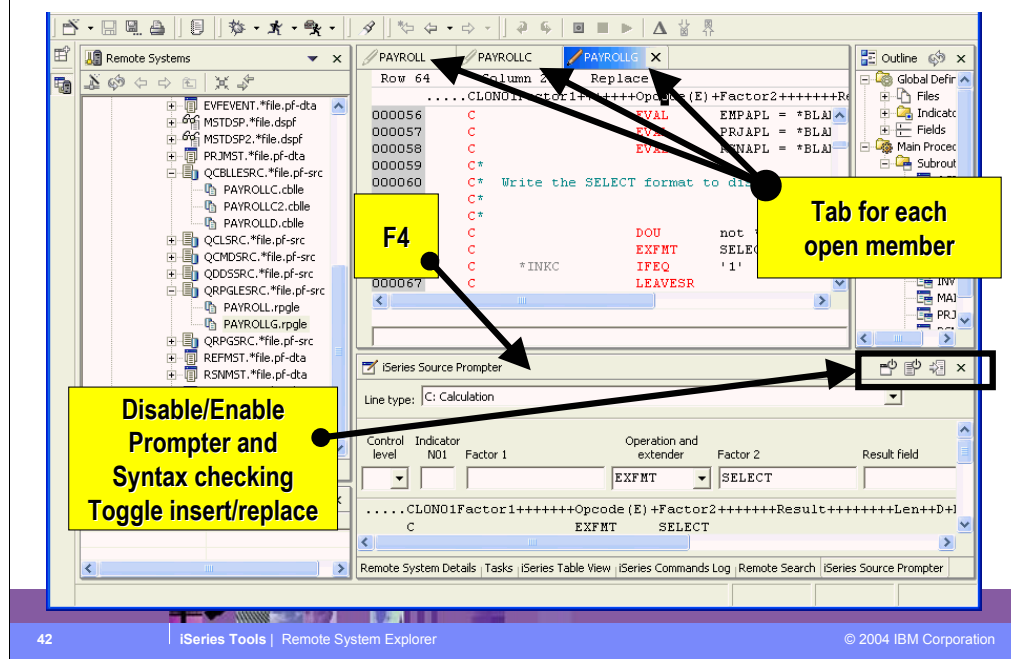

The Remote Systems LPEX editor is built-in, so it shows up in a pane within the IDE. You can open multiple members for editing, and each will be shown in the editor area with a tab that when selected brings that member to the foreground. You can double click on a tab to expand that member's edit window to full size. When a tab shows an asterisk in it, that indicates there are pending changes that should be saved. For RPG (both III and IV) you will notice there is color highlighting and familiar F4 support to prompt for the current line. The prompter sits in a view that doesn't overlap the editor. When done filling in the prompt, you can press one of two buttons to replace the current line or insert a new line.

LPEX Editor Functions: Edit pulldown

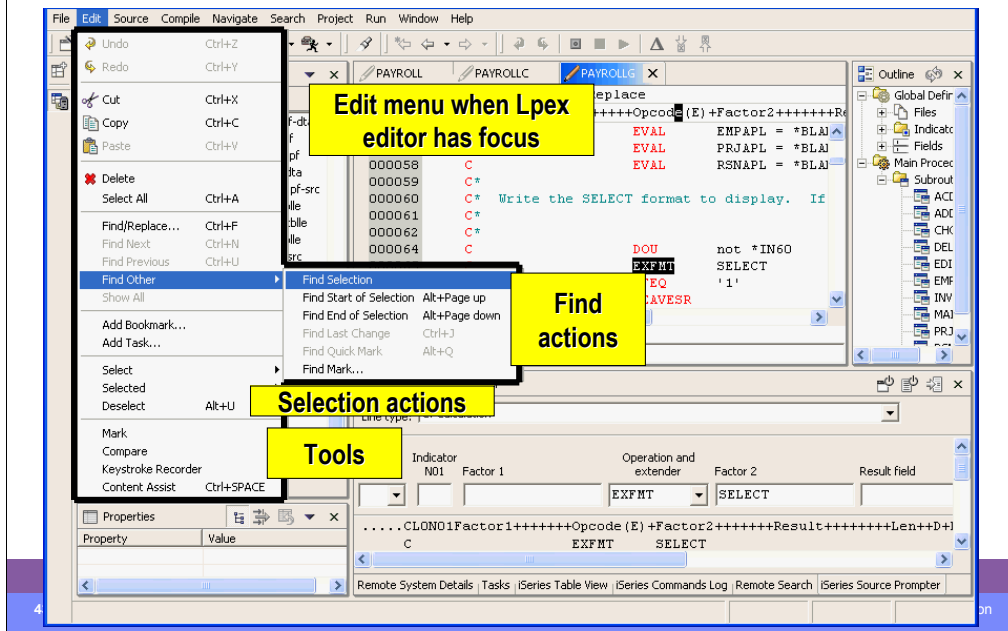

This shows the Edit menu, when the editor is open and in focus. This menu offers actions for clipboard, searching, selecting and a number of cool tools.

LPEX Editor Functions: Source pulldown


The screenshot shows the LPEX Editor interface with the Source pulldown menu open. A yellow box highlights the following functions:

- ✓ Create new procedure
 - ✓ Prompt
 - ✓ Syntax check
 - ✓ Program verify
 - ✓ Show indent view
- ✓ Show fields of selected F-spec
- ✓ Open select /copy member
- ✓ Resequence

The Source pulldown menu includes the following options: New, Context Prompt, Syntax Check All, Verify, Verify With Prompt..., Select Format Line..., Show Indentation, Show fields, /COPY Member (with a sub-menu containing Edit and Browse), Resequence All Lines, and Refresh. The background shows the editor window with a source member containing code and a list of fields.

This is the Source menu when the editor is open and in focus. It has a number of actions that apply to the entire source member, as opposed to what is selected.

LPEX Editor Functions: Context menu

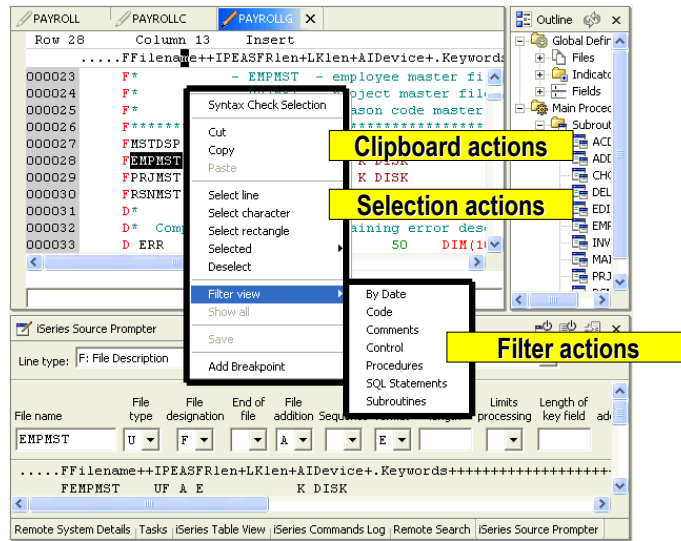


Here we see the pop-up menu within the LPEX editor. This contains clipboard and selection actions, as well as filtering actions which we will discuss.

LPEX Editor Functions: Preferences


- There are also a number of cool functions you can enable via the editor preferences

– Window-
>Preferences

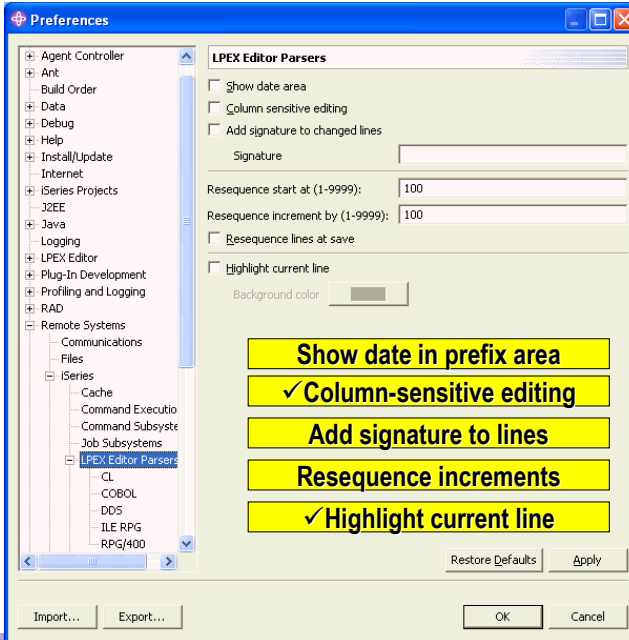

There are a number of other interesting Editor capabilities available for enabling in the editor's preference page. The most exciting of these are the column-sensitive editing and the highlight current line option. The former allows editing within a range of the RPG/DDS spec such that other areas of the same line are not affected by insert or delete, while the latter highlights the line containing the cursor.

LPEX Editor Functions: Preferences

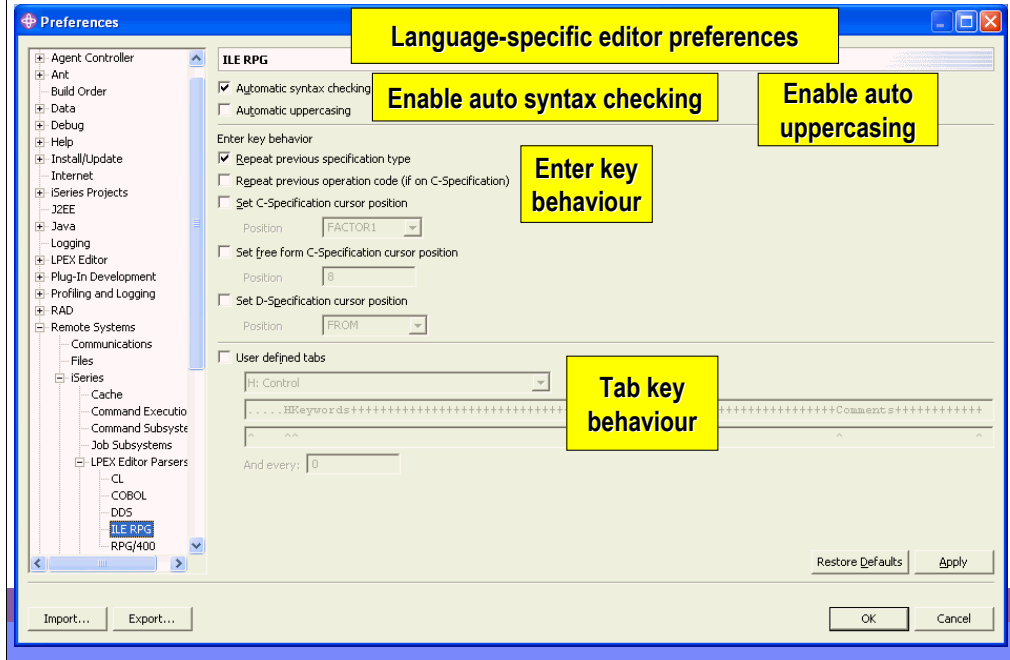

In addition to preferences that apply to all languages, there are preferences that apply specifically to individual languages.

SEU Style Prefix Commands

- SEU common prefix commands
- ILE RPG Format Line prefix commands
- ILE RPG Prompt prefix commands
- OPM RPG prefix commands

Example:

I, I5, D, DD ...etc.
FD, FC, FO, PP ...etc.
PH, P?, PC, PO, PP ...etc.
F, F?, P, IP, IP? ...etc

You can configure the LPEX editor to adopt the keyboard and command personalities of many popular editors. Most editor profiles differ only in the keys and commands used to perform various editor tasks. Some base editor profiles, listed below, also add a prefix information and command area at the start of each line:

ispf

seu

xedit.

The editor recognizes prefix commands used by these editor profiles. Depending on which profile you are using, you can enter SEU, XEDIT, or ISPF commands when the prefix area is active.

By default, the SEU profile is the active profile.

Getting More Editor Space

- Double-click on any Workbench view or Editor tab to maximize the view or Editor window
- Views can be dragged around and stacked into tabbed notebooks
- Views can be dragged to the left hand side of the Workbench as Fast views
 - Single click on the Fast view icon to open the view
 - Click anywhere else to close the view
- Oh – oh, what have I done?
 - Window -> Reset Perspective

You can easily double click on a view or editor tab to maximize the view or Editor window. If you double-click again you will return the view or Editor window to its original size. You can easily rearrange views by selecting them and dragging them to another location in the workbench. If you are going to use a view frequently but don't want to see it all the time in the workbench you can make it a Fast view. You select the view, right click and select as fast view. The view will then appear in the left hand frame of the Workbench as a Fast view icon. To reset your workbench window to its original layout, you can select Window -> Reset perspective.

IBM Software Group | WebSphere software

Fast View

The screenshot shows the IBM Remote System Explorer interface. The main window displays a code editor with the following content:

```

Row 28      Column 13      Insert
.....FFilenew++IPEASFRlen+LKlen+AIDevice+.Keywords+.....
000023      F*          - EMPMST - employee master file
000024      F*          - PRJMST - project master file
000025      F*          - RSNMST - reason code master file
000026      F*****
000027      FMSTDSP    CF   E          WORKSTN
000028      FEMPMST    UF  A  E          K DISK
000029      FPRJMST    UF  A  E          K DISK
000030      FRSNMST    UF  A  E          K DISK
000031      D*
000032      D* Compile time array containing error descriptions.
000033      D ERR      S          50      DIM(10) CTDATA PERRCD(1)
000034      D EMESS    S          50
000035      E*
000036      C*****
000037      C* MAINLINE CALCULATIONS
000038      C*****
000039      C* This mainline routine controls the display file processing and
        ing. Using the function keys described on each display
        t, you can transfer from one maintenance application to
        er. The action code you select on the selection formats
        mines if the program will add a new record to the file or
        e an existing record in the file.
        *****
        keeping, clear display fields and reset indicators.

```

Remote Systems view (callout pointing to the left-hand pane)


Outline View (callout pointing to the left-hand pane)

Tip:
 ✓ Use the outline view (in fast view mode) to easily navigate in the editor while keeping the editor maximized!

50 | ISeries Tools | Remote System Explorer | © 2004 IBM Corporation

Here you see an example of the Remote Systems view and the Outline view as Fast views in the workbench left hand frame.

LPEX Editor Views – Outline view

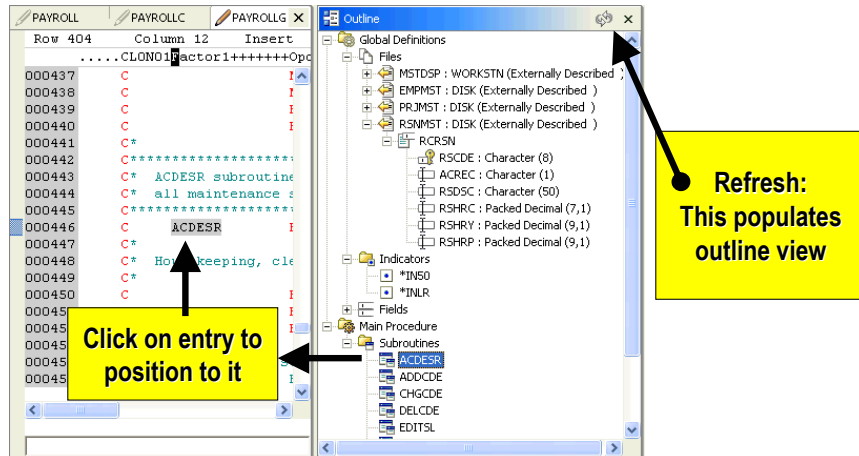

The Outline view helps you visualize the member you are editing by displaying all the program structures and functions in a clear-cut view.

Code Assist

Remote System Explorer - PAYROLLG - WebSphere Development Studio Client for iSeries

File Edit Source Compile Navigate Search Project Run Window Help

PAYROLL PAYROLLG X

Row 34 Column 44 Insert

```

.....DName+++++ETDsFrom+++To/L+++IDc. Keywords+++++C
000024 F* - PRJMST - project master file
000025 F* - RSNMST - reason code master file
000026 F*****
000027 FMSTDSP CF E WORKSTN
000028 FEMPST UF & E K DISK
000029 FPRJMST UF & E K DISK
000030 FRSNMST UF & E K DISK
000031 D*
000032 D* Compile time array containing error desc
000033 D ERR S 50 DIM(10)
000034 D EMESS S 50
VARYING
NOOCT
PERRCD(NUMERIC-CONSTANT)
PROCPT
PROCPTR
STATIC
TIMFMT(TIME-FORMAT{TIME-SEPARATOR})
TOFILE(FILE-NAME)
VARYING
lines if the program w
an existing record in the file.
*****
d reset indicators.

```

Use Ctrl+Space for context-sensitive selection

Vastly improved for RPG in 5.1!

New for COBOL in 5.1!

52

© 2004 IBM Corporation

The Content Assist tool offers not only auto-complete functionality, by giving you a list of possible functions, objects or keywords to use, but also offers documentation on each of these to help you decide.

Help – at your Fingertips

- RPG, Cobol, DDS online references
- Programming Guides including CL
- F1 Help
 - Sensitive to where cursor is in the editor
- Message Help
- and much more

The screenshot shows the 'Help - WebSphere Development Studio Client: Advanced Edition for iSeries' window. The search bar contains 'iSeries' and the search scope is set to 'iSeries'. The 'Contents' pane on the left shows a tree view with 'iSeries programming information' selected. The main pane displays the 'WebSphere(R) Development Reference' for 'File Description Specifications'. The text explains that file description specifications identify each file and must have a corresponding file description specification. It also lists limitations for program specifications:

- Only one primary file can be specified. If more than one is required.
- Only one record-address file.
- A maximum of eight PRINTER files.
- There is no limit for the maximum number of files.

Navigation links at the bottom of the page include 'Top of Page', 'Previous Page', and 'Next Page'.

Now you can have a ILE RPG reference at your finger tips. Simply press F1

IBM Software Group | WebSphere software

Instant syntax checking

Errors inserted as “show lines” when cursors moves off line

Press F1 on error to get 2nd-level help

Help - WebSphere Development Studio Client for iSeries

Search: GO Search scope: All topics

Contents

- iSeries application development
- iSeries programming information
- Remote System Explorer Development
- WebSphere Application Server Migration
- J2SE SDK 1.3.1 APIs
- Tool developer information
- J2EE SDK 1.3.1 APIs
- Remote System Explorer User Guide
- Support information
- Web developer information

RPG Messages

[RNF5014](#)

Operation code is not valid; specification is ignored.

30

Cause : The Operation code is not valid. No further checking is done on the specification. The operation must start with a valid Operation Code and can be followed by an optional Operation Extender. If specified the Operation Extender must be one or more of A, D, E, H, M, N, P, R, T, or Z, and enclosed within parentheses.

Recovery . . . : Specify a valid operation, or omit the specification. Compile again.

[[Top of Page](#) | [Previous Page](#) | [Next Page](#) | [Table of Contents](#)]


Copyright IBM Corporation 1992, 2003. All Rights Reserved.

The Remote Systems LPEX Editor gives you instant feedback for your code, at the location where a syntax error occurs. This happens as you cursor off a changed line.

IBM Software Group | WebSphere software

Verifying

Verify runs built-in copy of the compiler

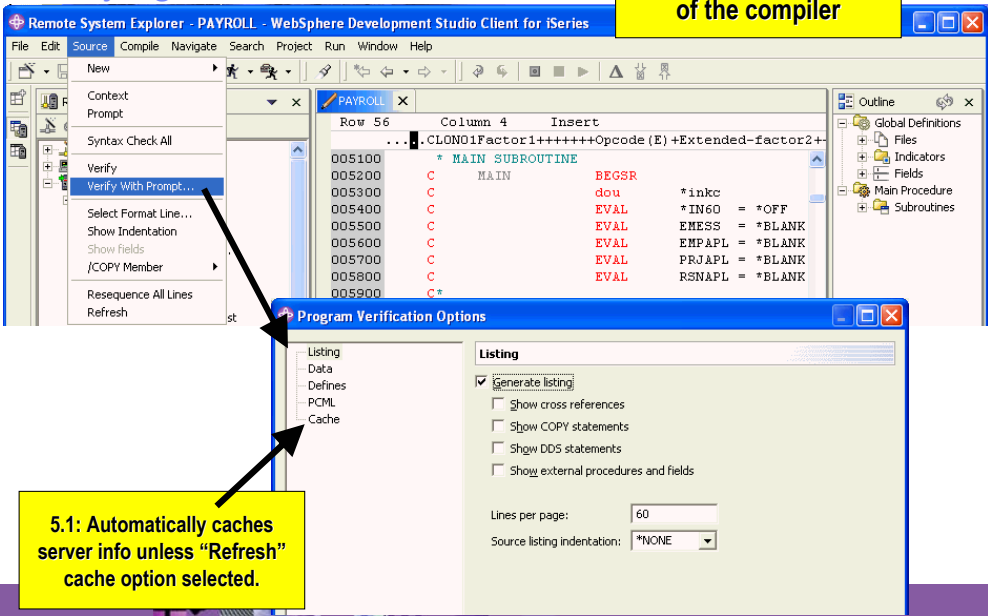

Remote System Explorer - PAYROLL - WebSphere Development Studio Client for iSeries

File Edit Source Compile Navigate Search Project Run Window Help

Context Prompt

Syntax Check All

Verify

Verify With Prompt...

Select Format Line...

Show Indentation

Show Fields

/COPY Member

Resequence All Lines

Refresh

Row 56 Column 4 Insert

```

... .CLONG1Factor1+++++Opcode(E)+Extended-factor2+
005100 * MAIN SUBROUTINE
005200 C MAIN BEGSR
005300 C dou *inlc = *OFF
005400 C EVAL *IN60 = *OFF
005500 C EVAL EMESS = *BLANK
005600 C EVAL EMPAPL = *BLANK
005700 C EVAL PRJAPL = *BLANK
005800 C EVAL RSNAPL = *BLANK
005900 C*

```

Global Definitions

- Files
- Indicators
- Fields
- Main Procedure
- Subroutines

Program Verification Options

Listing

- Data
- Defines
- PCML
- Cache

Listing

- Generate listing
- Show cross references
- Show COPY statements
- Show DDS statements
- Show external procedures and fields

Lines per page: 60

Source listing indentation: *NONE

5.1: Automatically caches server info unless "Refresh" cache option selected.

55 | ISeries Tools | Remote System Explorer | © 2004 IBM Corporation

Use the Source pulldown to verify your work. The verifier is a built-in copy of the compiler, for the purpose of catching all errors, not just syntax. The verify has options, which effectively are the subset of the compiler options that affect error checking.

Verify – Error List

The screenshot shows the IBM WebSphere Development Studio Client for iSeries interface. The main window displays the source code for a program named 'PAYROLL'. The code is in RPG format and includes a MOVE statement with operands ERR and EMES. An error message is displayed in the source editor: "Move operands ERR and EMES have types that are not compatible. The name or indicator EMES is not defined." Below the source editor, the 'iSeries Error List' window is open, showing a table of errors. A yellow callout box with the text "Double clicking on error takes you to error in source" points to the error message in the source code.

ID	Message	Se...	Line	Location	Cor
RNF5184	Factor 2 must be '0' or '1' when the Result is an I...		30	364	RSELAB01/QRPGLES...
RNF7515	Move operands ERR and EMES have types that ...		30	365	RSELAB01/QRPGLES...
RNF7089	RPG provides Separate-Indicator area for file M...		0	27	RSELAB01/QRPGLES...
RNF7031	The name or indicator RSNTAG is not referenced.		0	110	RSELAB01/QRPGLES...

After performing a verify, the Error List window lists the errors that are found and their severity, inserts the error messages directly into the source and helps you to navigate between the errors.

Listing View

The screenshot shows the 'Remote System Explorer' window for 'PAYROLL'. The main editor displays the source code for 'PAYROLL.RPGLE', including a 'Verify program action completed with errors.' message. Below the editor, the 'iSeries Listings' window is open, showing a table with columns for Name, Date, and Time. The listing for 'PAYROLL.RPGLE' is selected, showing lines 191 through 194. A yellow callout box with the text 'Verify with Prompt, select Generate Listing' has an arrow pointing to the 'Generate Listing' option in the 'Verify with Prompt' dialog.

Name	Date	Time
PAYROLL.RPGLE	Sep 6, 2003	11:11:35 AM

```

191 C*****
192 C*
193 C* Housekeeping, clear display fields and reset indicators.
194 C*
    
```

Here is the Listing view from the Program Verifier, if that option was chosen.

IBM Software Group | WebSphere software

Compiling

- To compile a member, use Compile pulldown when editing, or right-click menu on the member


Choose from existing compile commands or

Create or modify compile command

58 | iSeries Tools | Remote System Explorer

After you have verified and fixed all your errors, it is time to launch the compile. This is done via the Compile pulldown (only if editor is active) or the member's popup menu. There are a number of compile commands pre-supplied for you, for each member type, or you can create your own compile command. Like user actions, these support substitution variables. Once you create a compile command, it appears in the cascading Compile menu.

The last-used command, for this member's type, is checked in the Compile menu.

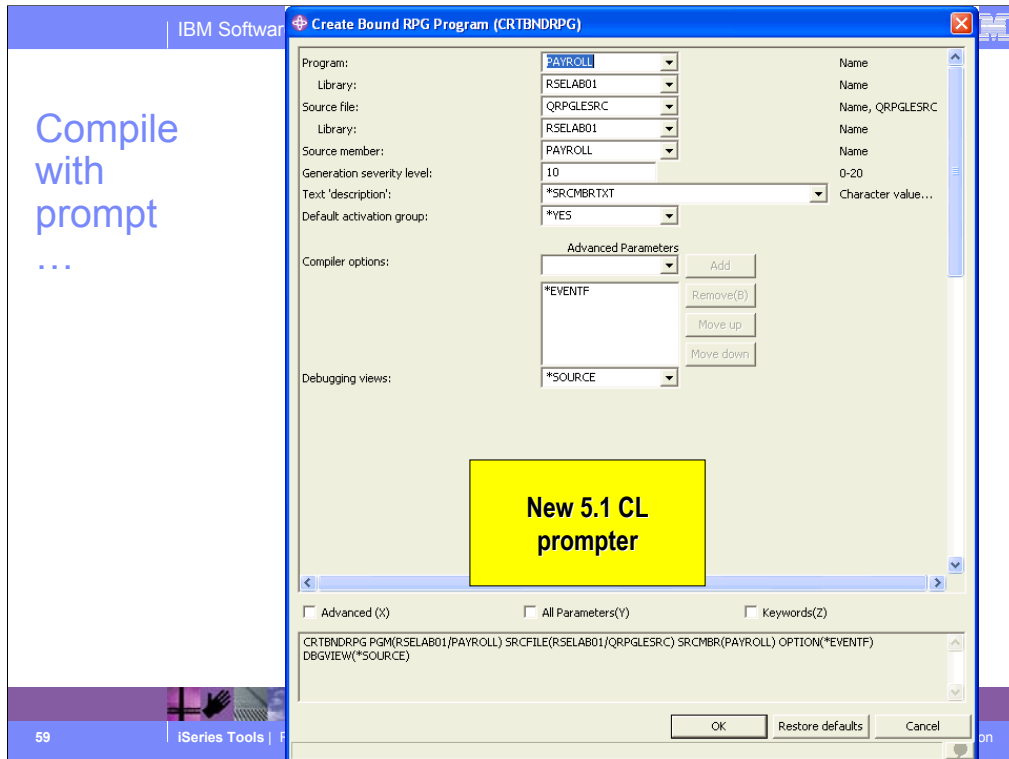

When you select to prompt the compile command, the command prompt is converted to a GUI and displayed. For the 5.1 release, this GUI was re-written from Java's Swing to Eclipse's SWT so it more consistent with the rest of the dialogs in the IDE.

Indent View

The screenshot displays the IBM Remote System Explorer interface. The 'Show indentation' menu option is highlighted, and an arrow points to the 'Series Indent' view. This view shows a table with columns for row number, column number, and the code itself, which is indented to match its structure in a compiler listing.

Row	Column	Code
037300	C	EMPAPL
037400	C	PRJAPL
037500	C	RSNAPL
037600	C	MOVE
037700	C	MOVE
037800	C	END

The 'Series Indent' view also shows a table with columns for row number, column number, and the code, which is indented to match its structure in a compiler listing.

Row	Column	Code
037300	C	EMPAPL
037400	C	PRJAPL
037500	C	RSNAPL
037600	C	MOVE
037700	C	MOVE
037800	C	END

Here you see the results of the indent option: a readonly view showing the code indented, much as it is in a compiler listing, but with color.


Show Fields

The screenshot shows the 'Remote System Explorer' window with the 'Show Fields' tool active. The tool has retrieved the fields for the file 'RSELAB01/RSNMST' and displays them in a table view. The table has the following data:

Name	Record	Type	Length	Text
ACREC	RCRSN	Character	1	ACTIVE RECORD CODE
RSCDE	RCRSN	Character	8	REASON CODE
RSDSC	RCRSN	Character	50	REASON CODE DESCRIPTION
RSHRC	RCRSN	Packed Decimal	7.1	REASON CODE HRS CURR MONTH
RSHRY	RCRSN	Packed Decimal	9.1	REASON CODE HRS YEAR TO DATE
RSHRP	RCRSN	Packed Decimal	9.1	REASON CODE HOURS PRIOR YEAR

Here you see the results of the Show Fields tool. It retrieves the fields for the file under the cursor, and shows the fields in a table view.

Integrated Compare

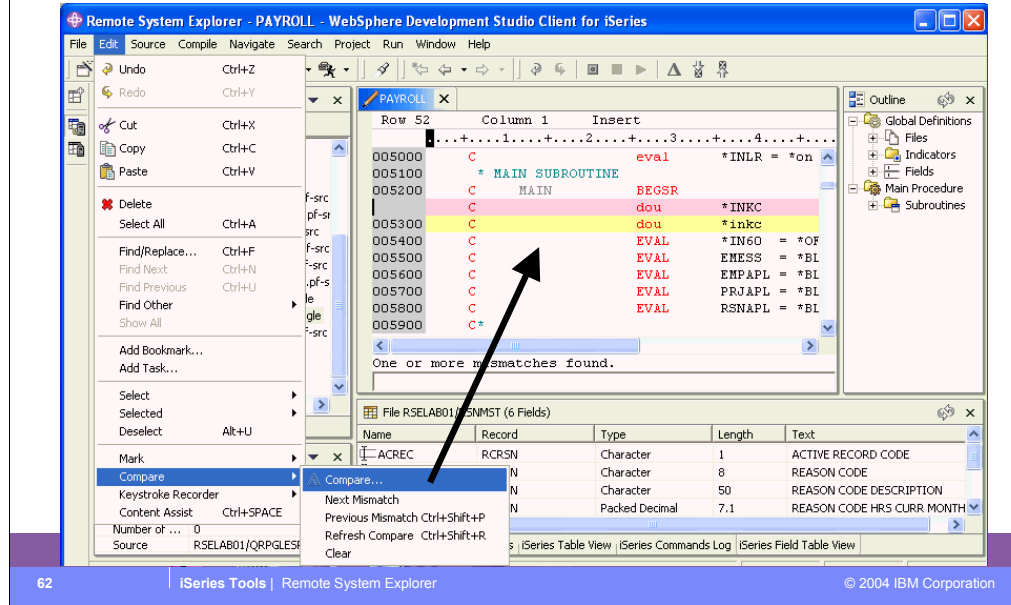

The compare tool under the Edit menu is used to compare the currently active member in the editor with another member you select, and the differences are shown within the edit window, as we see here.

Alternatively, there is another compare utility not editor based, in the popup menu for members.

Filtering

Right click in editor to filter view

Only lines meeting filter criteria are shown

Use + / - to expand or collapse filtered sections

Row 64 Column 7 Ins
CLONO1Factor1+++++Opode(L)+Factor2++++
 C*
 006100
 006200
 006300
 006400
 006500
 006600
 006700
 006800
 006900
 007000
 007100

Syntax Check Selection
 Cut
 Copy
 Paste
 Select line
 Select character
 Select rectangle
 Selected
 Deselect
 Filter view
 Show all
 Save
 Add Breakpoint

By Date
 Code
 Comments
 Control
 Procedures
 SQL Statements
 Subroutines

Row 446 Column Insert
CLONO1Factor1+++++Opode(E)+Factor2++++
 005200 C MAIN BEGSR
 010200 C endsr
 011000 C RSNTAG BEGSR
 017600 C endsr
 018300 C EMPTAG BEGSR
 025700 C endsr
 026400 C PRJTAG BEGSR
 033500 C endsr
 034700 C EDITSL BEGSR
 040000 C ACDESR BEGSR
 040700 C endsr
 043100 C ADDCDE BEGSR
 044000 C endsr
 044400 C CHGCDE BEGSR
 044500 C IF *IN50
 044600 C EVAL *IN60 = *C

63 | iSeries Tools | Remote System Explorer | © 2004 IBM Corporation

A very popular feature of LPEX is its support for subsetting the source to show only lines meeting a criteria, such as containing a given string or representing the begin or end of a subroutine / procedure. This capability is accessed from the right click menu of the editor. In subset mode, you will notice plus signs, that if expanded will un-hide the lines up to the next visible line.

IBM Software Group | WebSphere software

NEW FOR 5.1 !

New Procedure wizard

Procedure wizard generates prototype and body stub

64 | ISeries Tools | Remote System Explorer | © 2004 IBM Corporation

In 5.1, the Procedure SmartGuide from CODE/400 was ported to the new editor. This will prompt for a procedures signature information (name, parameters and return type) and generate the procedure prototype and the body. It is up to you to subsequently add logic to that body.

The prototype is generated at the top, after the last D-spec, while the body is placed at the bottom of the current member.

IBM Software Group | WebSphere

New Procedure wizard

Procedure wizard helps with complexity of RPG language

Flyover help describes each option

Change Procedure Parameter

Parameter name:
 Parameter description:

Attributes

Defined like another field:

Field Data Structure Record Format

Type:
 Length: 3, 5, 10, 20
 Decimals:
 The class of the object:
 CCSID number: 0 - 65535, *DFT
 DATFMT:
 Separator:
 Sample:

Array entries (DIM):

Other keywords

ALTSEQ ASCEND DESCEND NOOBT

Parameter passing options

Pass copy of contents (VALUE) Pass read-only reference (CONST)

Parameter options (OPTIONS)

Optional (*NOPASS) Optional (*OMIT)
 Variable size (*VARSIZE) Null-terminated string (*STRING)
 Right adjusted string (*RIGHTADJ) (>=VAR4)

65 | ISeries Tools | Remote System Explorer | Corporation

The procedure wizard can help with users not fully familiar with RPG IV, especially for the parameters and return type information.


Remote System Explorer

Designer

Now we'll describe the CODE Designer tool, launchable from the IDE.


CODE Designer

- Use **Open With** -> **CODE Designer** to open designer
 - For DSPF, PRTF, PF
 - Launches in separate window
 - Currently no built-in DDS designer, but built-in source editor does support DDS

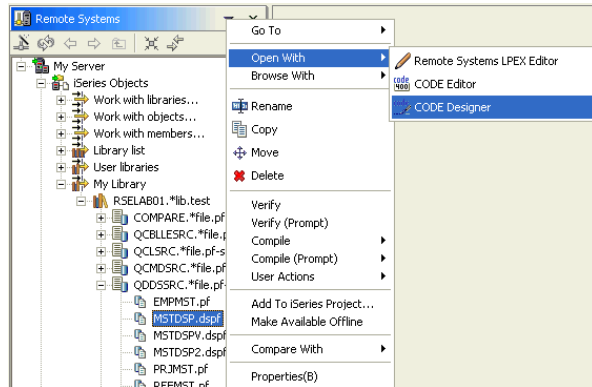

CODE Designer is an editor like SDA and RLU, for WYSIWYG development of display files and printer files. It also supports physical files.

Unlike the source editor, this editor has not been ported into the IDE yet, so those wanting a great WYSIWYG tool have to use it still. To make that easy, there is a right click action to launch it from a selected member.

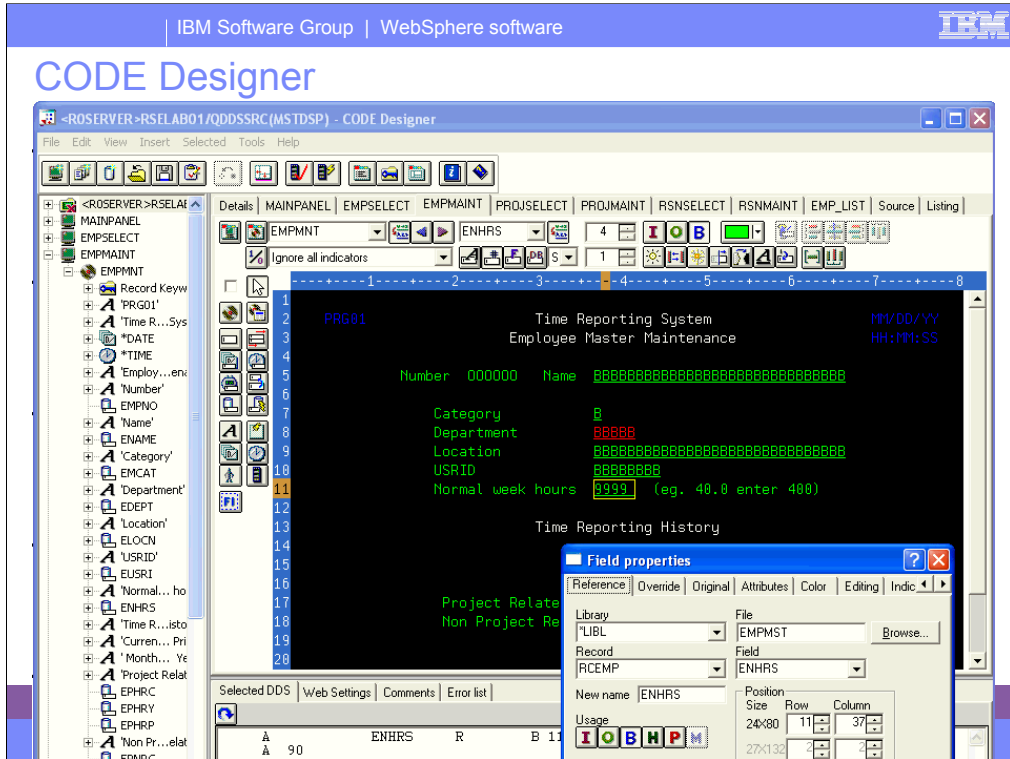

This is the CODE Designer. As you can see, because its not in the IDE, it launches in its own main window.

CODE Designer

- **Graphical design tool for DDS**

- display files - screens

- printer files - reports

- physical files - databases

- **Powerful intuitive interface**

- Lets novice create DDS quickly and easily while giving expert access to all the features of DDS


- WYSIWYG graphical design - Drag/drop ease

- Properties notebook

- Integrated local verifier

- Explorer-like browsing of DDS hierarchy

CODE Designer is a very popular and powerful tool.

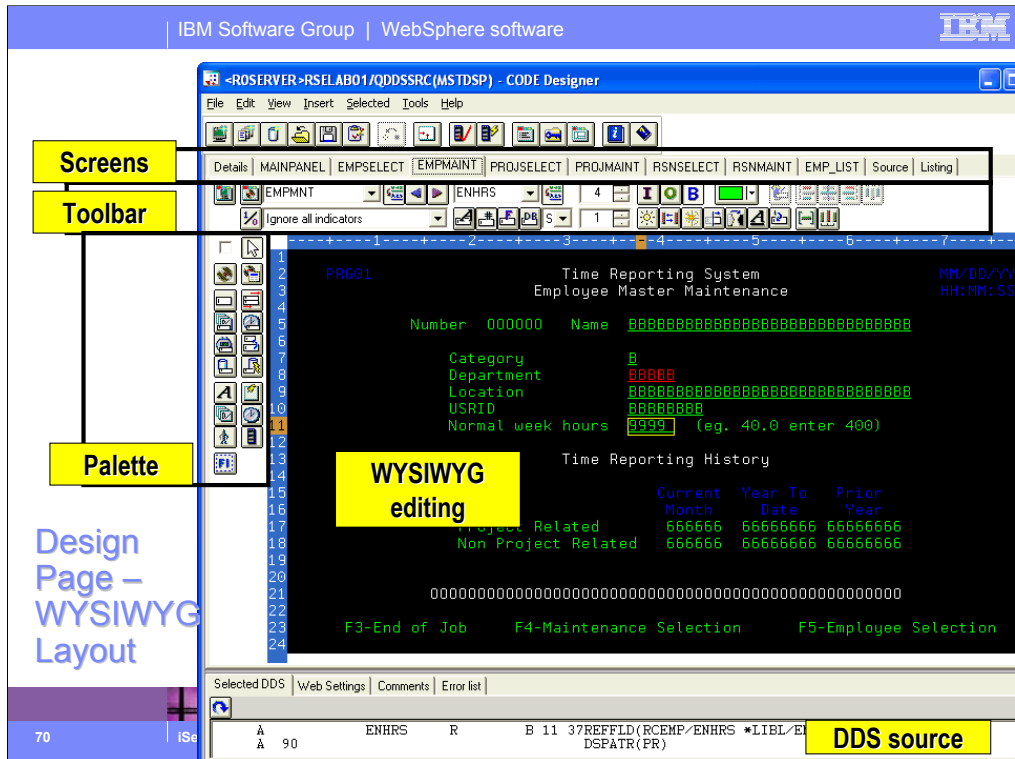

This is the equivalent of SDA's option 12 design screen. It is rich in toolbar and palette items, and supports drag and drop, and direct editing.

Explorer for DDS

The screenshot displays the IBM Explorer for DDS interface. The main window shows the 'Record EMPMNT fields' table with columns for Field, Posit., Len., Type, Shift, Usa., Reference, and Sample. A yellow box labeled 'Field List' highlights the table. The left pane shows the 'DDS Explorer' tree structure. The bottom pane shows the 'DDS source' code for the EMPMNT record.

Field	Posit.	Len.	Type	Shift	Usa.	Reference	Sample
'PRG01'	2,5	5	Text const...				PRG01
'Time R...System'	2,30	21	Text const...				Time Reporting System
'DATE'	2,70	6	Date const...				MM/DD/YY
'TIME'	3,70	6	Time const...				HH:MM:SS
'Employ...enance'	3,27	27	Text const...				Employee Master Maintenance
'Number'	5,14	6	Text const...				Number
EMPNO	5,22	6	Text const...		Both	RCEMP/EMPNO ...	000000
'Name'	5,31	4	Text const...				Name
ENAME	5,37	30	Text const...		Both	RCEMP/ENAME ...	BBBBBBBBBBBBBBBBBBBBBB
'Category'	7,18	8	Text const...				Category
EMCAT	7,37	1	Alphanumeric	A - Alphanumeric	Both	RCEMP/EMCAT ...	8
'Department'	8,18	10	Text const...				Department
EDEPT	8,37	5	Alphanumeric	A - Alphanumeric	Both	RCEMP/EDEPT ...	BBBBB
'Location'	9,18	8	Text const...				Location
ELOCN	9,37	30	Alphanumeric	A - Alphanumeric	Both	RCEMP/ELOCN ...	BBBBBBBBBBBBBBBBBBBBBB
'USRID'	10,18	5	Text const...				USRID
EUSRI	10,37	8	Alphanumeric	A - Alphanumeric	Both	RCEMP/EUSRI W...	BBBBBBBB
'Normal... hours'	11,18	17	Text const...				Normal week hours
ENHRS	11,37	4	Text const...		Both	RCEMP/ENHRS ...	0000

Selected DDS | Web Settings | Comments | Error list

```

R EMPMNT
A*
A* THE EMPMNT FORMAT ALLOWS UPDATE OF THE EMPLOYEE NUMBER
A* SPECIFIED ON THE EMPSEL FORMAT

```

For those who prefer non-WYSIWYG, there is also a field list where you can create, change and re-order fields. It contents changes as records are selected in the DDS Explorer primary view on the left. The field list is the only option for PF editing.

Remote System Explorer

Integrated iSeries Debugger

With the Integrated iSeries Debugger you can debug your program running on the iSeries host from a graphical user interface on your workstation. You can also set breakpoints before running the debugger, by inserting breakpoints directly in your source while editing. The integrated iSeries debugger client user interface also enables you to control program execution. For example, you can run your program, set line, watch, and service entry point breakpoints, step through program instructions, examine variables, and examine the call stack. You can also debug multiple applications, which may be written in different languages, from a single debugger window. Each session you debug is listed separately in the Debug view.

Integrated iSeries Debugger - Overview

- Supports many languages
 - RPG, COBOL, CL, C, and C++
 - ILE and non ILE
 - Java
- Supports many views
 - Source and Listing Batch and interactive
- Supports many applications
 - Batch and Job
 - Interactive
 - Multi-Threaded Applications
 - Client/Server Applications
 - Distributed Applications

The Integrated iSeries Debugger is powerful and complete.


Debugger Invocation: from popup menu

Debug As... from Popup menu of:

*PGM, *SRVPGM, job

Debug As...

Batch, Int'v'e, Multi-threaded

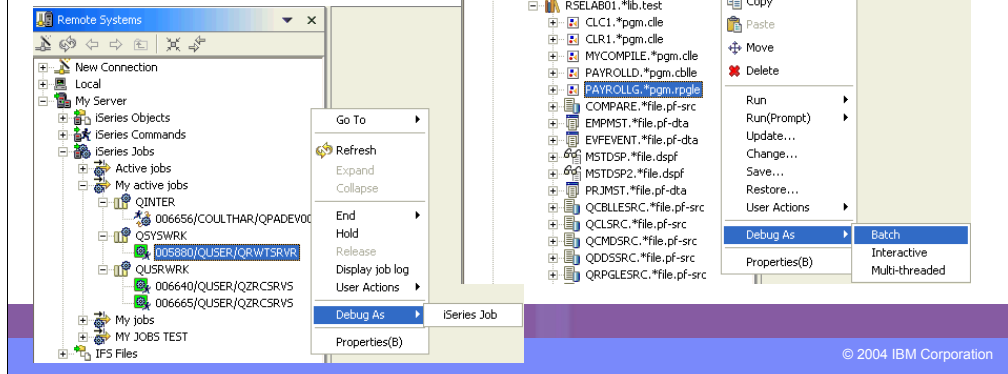

You can run and debug programs from the Remote Systems view or the iSeries Table view in three ways:

- In a batch job
- In an interactive job
- In a server job


In the third case, running the program will use the same job as the Remote System Explorer communications server job. With batch and interactive jobs, you cannot monitor the status as easily, however, you do not tie up your communications server and you are notified when the program command ends. Batch jobs work as you would expect and do not require any initial setup.

Note: A multi-threaded debug session creates a new server job and this way keeps the RSE communications server job free for other tasks.

Debugger Configurations: for easy re-use!

The image displays two screenshots of the IBM WebSphere Development Client interface. The top-left screenshot shows the 'Remote System Explorer' window with a 'Debug As' dropdown menu open, highlighting the 'Debug...' option. The top-right screenshot shows the 'Debug' configuration dialog box, where a configuration named 'My iSeries program' is selected in the 'Configurations' list. The dialog box includes fields for 'Connection', 'Program or Service Program', and 'Library', along with checkboxes for 'Step into', 'Terminate debug session on program completion', and 'Update production files'. A yellow callout box with black text points to the 'Debug...' option in the dropdown menu, stating: 'Existing debug configurations are easily accessible in debug pulldown!'. The bottom of the image shows the 'Remote System Explorer' window with the 'Debug As' dropdown menu open, highlighting the 'Debug...' option.

Debug configurations are for powerful re-use. If what you want to debug takes a number of parameters, or is not straightforward to launch, you can predefine this information into a named configuration. Once created, the configuration appears in the dropdown for the debug icon, and can be selected easily.

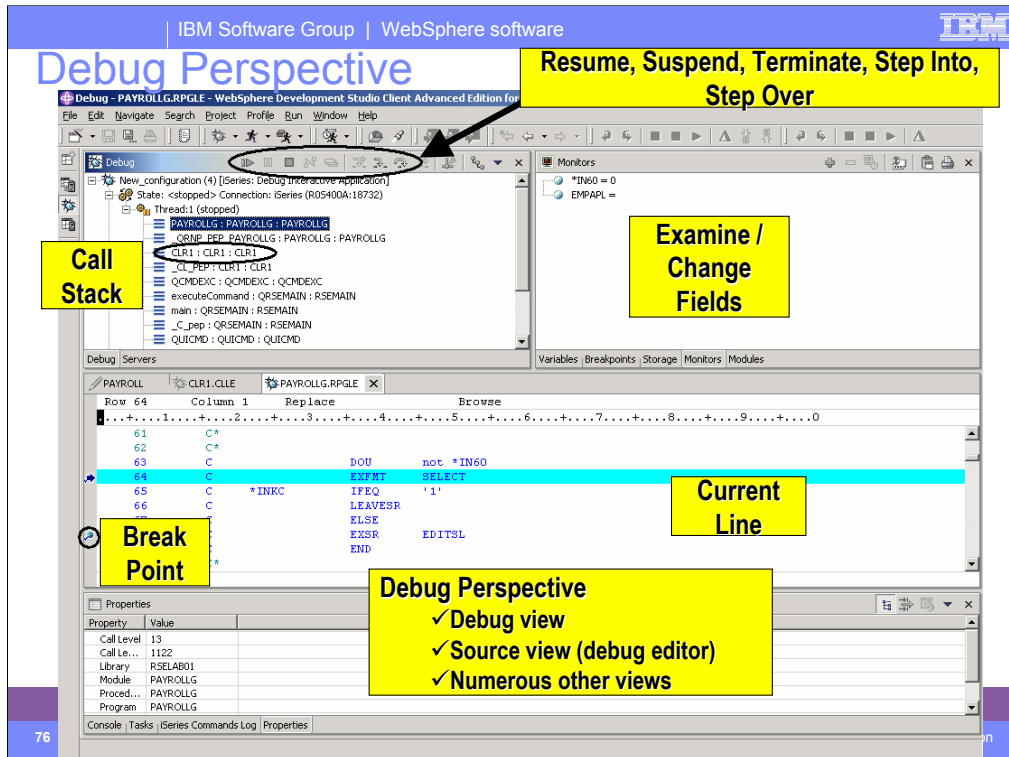

Here we see the common Eclipse Debug perspective, which is being used to debug an RPG program. The common debug user interface has been connected to the iSeries debug engine in Version 5.0, to offer a common and compelling debug story for OPM/ILE RPG and COBOL and CL, and ILE C and C++.

In the upper left pane is the call stack, much like option 11 in the OS/400's WRKACTJOB. It shows the calls that reflect your current program execution. When you double click an item in the stack, its source (if available) is shown in the source pane in the middle. The upper right is where all the various views are for working with data contents, breakpoints etc.. The middle is the debugger source view, with source executable (debug) lines in blue, others in green. The current line of execution is highlighted, and breakpoints appear as a dot with a check mark in the left margin.

Although not part of the common Debug Perspective, the Properties view contains valuable information about the selected object, which could be a breakpoint selected in the Breakpoints view, an entry selected in the call stack, etc. To add the Properties view, click on the menu item **Window** and **Show View** on the pull down menu, select **Other** from the submenu, expand **Basic**, select **Properties** and click OK.


Setting Breakpoints

Setting Breakpoints:

- ✓ Double click in prefix area
- ✓ Prefix area popup menu
- ✓ Source popup menu
- ✓ Breakpoints view popup menu

Property	Value
Call Level	13
Call Le...	1680
Library	RSELAB01
Module	PAYROLLG
Proced...	PAYROLLG


You can only set breakpoints at executable lines. All executables lines are displayed in blue.

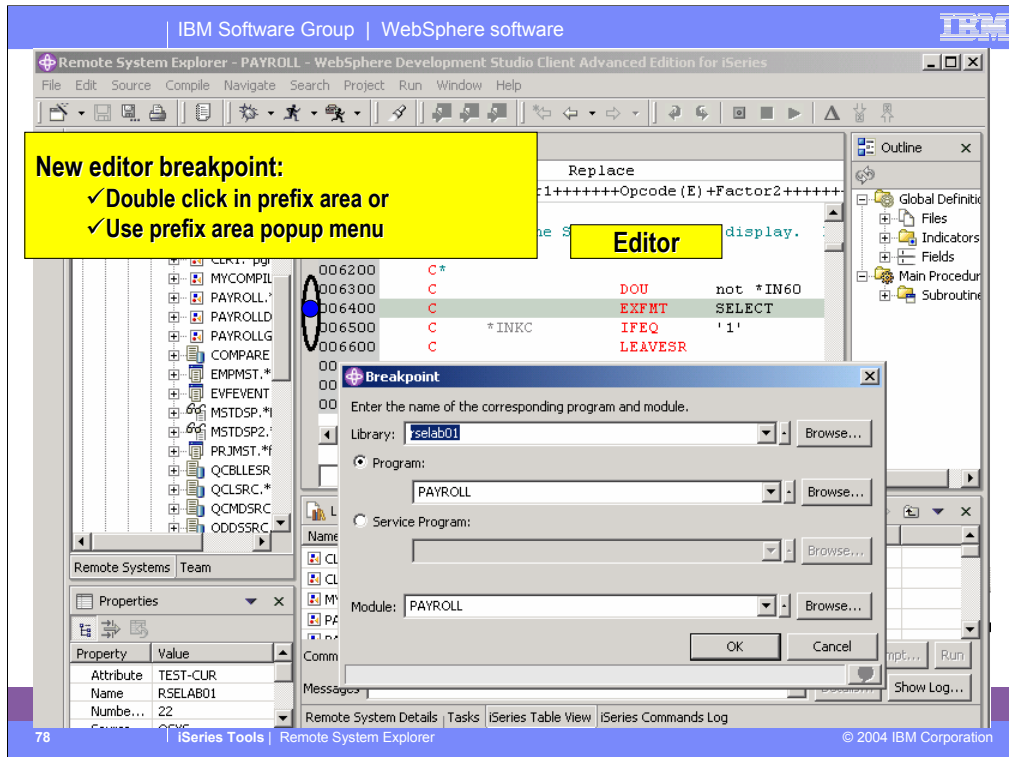

This is the dialog for edit breakpoints. Enter the library name and select Program or Service Program. The breakpoint is shown as a dot in the prefix area. If there is an active debug session, the breakpoint will be set in that session and there will be no marker in the editor. The breakpoint is then listed in the Breakpoints view in the Debug perspective.

Remote System Explorer

Reference:
Getting Fixes



Getting Service Packs and Verifying PTFs

- **To get client service packs:**
Use Help->Software Updates->New Updates
Repeat until told no more updates (4 times)
- **To verify you have needed host PTFs:**
On an iSeries connection, right click on iSeries Objects subsystem
Select Verify Connection

Please try the RSE! And to ensure success, we want to ensure you have the latest client and server fixes.

Remote System Explorer

Reference:
What's New

What's new in RSE for Version 5.0

- Library list manipulation support
- More wizards, improved user actions and compile support
- Drag and drop
- PDM-like table view with command line
- Editor enhancements:
 - Syntax checking for RPG, COBOL, DDS, CL
 - Program verifiers for RPG, COBOL, DDS
 - F1 help support for RPG, COBOL, DDS, CL
 - Outline view for RPG, COBOL + content assist for RPG
 - List fields support for F-spec, COPY-DDS
 - Performance enhancements
- Rich command console for Unix, Windows, Linux, Windows
- New common debug UI, and editor breakpoint support
- Remote Text Search (eg, FNDSTRPDM interface)

 A partial list

Some of the primary enhancements in 5.0 are:

- Support for a new library list filter, and actions for manipulating the library list. This is much like *LIBL support in WRKLIBPDM.
- New easy-to-use wizards to create libraries, files, members, data areas, data queues and message files.
- Ability to drag source members to another file, or another iSeries, or to any other system such as local, UNIX, Windows and Linux source files.
- The primary view in Remote Systems Explorer is the Remote Systems tree view, but PDM users are used to a table view, so there is now an iSeries Table view that shows what the Remote Systems tree view shows, but in table format. You can sort the columns when you click on the column heading. The contents of the table are easily replaced for example when you double click on a file. There are right-click actions that are the same as PDM's, and a command line at the bottom just like in PDM.
- The Remote Systems LPEX Editor is now well beyond SEU's function, and getting close to all of CODE's. The syntax checker is ported down from SEU, the compilers are imbedded for verifying all errors, and the reference manuals are built-in and F1 cursor sensitive. There is a new outline view showing the program hierarchy at a glance, and something really cool called Content assist which offers lists of options for code-completion based on the location of the cursor in the source. You invoke Content assist easily in the editor through the Ctrl+spacebar keys.
- The List fields option is available when the cursor is on an F-spec or COBOL Copy-DDS statement. This option opens a Window that shows all the fields in the referenced file.
- There are also significant enhancements to the editor's open, save and runtime performance.
- A new command console is available for QShell, UNIX, Windows, Linux and local which are very rich in capability. You can run any command remotely, and see the feedback. The feedback is parsed, so when listing files, for example, you can double click to open the file. Or double click on a folder name to open a table view on the folder's contents.
- The common Eclipse-supplied Debug perspective to iSeries programs is integrated into the workbench, offering skills transfer. You can set breakpoints in the built-in Remote Systems LPEX editor, and then run to the breakpoint. This opens the Debug perspective. There is also new support for the common Eclipse run-configurations and debug-configurations.
- The Remote Text Search is a local GUI interface to FNDSTRPDM (find string PDM) that searches remote members for a given string. The results are shown in a local window, and you can double click to open the editor and position the cursor.

What's new in RSE for Version 5.1

- Improved caching support for Program Verifiers
- Enhancements to CL command prompting
- Multiple-selection for compiles
- Expandable *PGMs, *SRVPGMs (to see modules)
- Expandable modules (to see exported procedures)
- Editor wizard for creating RPG IV procedures
- Editor enhancements to RPG IV, COBOL outline view and code assist
- Editor template support for RPG IV free form, COBOL, C and C++
- Editor quick-open dialog (Ctrl+Shift+N)
- Remote Agent Controller support for iSeries
 - Enables publishing of Web projects and profiling of Java code
- Enhancements to Linux/Unix/Windows/QShell support
 - Compare two files, or two versions of same file
 - Replace file from local history
 - Drag 'n drop to editor, Drag 'n drop to populate filters
 - Content assist for commands, in console

 A partial list

Some of the primary enhancements in the 5.1 release are listed here.

- Improved caching for the verifiers. This now behaves as it did in CODE – the cache information is used if available, unless the refresh-cache option is chosen. This can significantly improve verifier performance.
- CL command prompting is now SWT-based versus Swing-based, so it looks like the rest of the IDE.
- It is now possible to select multiple members to submit to compile. The order they are compiled is configurable by member type.
- Program objects are expandable to show modules.
- Modules objects are expandable to show exported procedures within the module.
- The CODE/400 SmartGuide for creating new procedures has been ported to the new editor, and enhanced
- The outline view for RPG IV shows more information now, and positions properly when items selected. There is totally new support for code assist for COBOL, and the RPG IV code assist is way better with support for parameters to keywords, functions, etc and case sensitivity.
- There is a new action from the local toolbar of the Remote Systems view to quickly open a member for edit or browse. It is also easily invoked via Ctrl+Shift+N. This can be faster than drilling down if you know what you want to edit.
- The Remote Agent Controller has been ported to iSeries, as well as the agents that come with it for Web publishing and Java profiling. See the documentation for more details. There are also actions in the RSE now for starting and stopping the RAC server on the iSeries.
- The non-iSeries support is also much enhanced this release:
- New actions to compare a file with another, or another version of itself.
- New action to replace a file with a previous version from the local history. Each edit of the file creates a new local history.
- Open files by dragging them to the editor.
- Add folders/files to filters by dragging them to a filter.
- Use Ctrl+Space in the command console to see a list of commands available (built-in plus on path).

Additional Information

■ homepage:

<http://ibm.com/software/awdtools/wds400>

Select Library link for Labs, Tutorials, Presentations

■ newsgroup:

<news://news.software.ibm.com/ibm.software.websphere.code400>

■ email distribution list:

“This is the Websphere Development Studio Client for iSeries (WDSCI-L) mailing list

To post a message email: WDSCI-L@midrange.com

To subscribe, unsubscribe, or change list options,

visit: <http://lists.midrange.com/mailman/listinfo/wdsci-l>

or email: WDSCI-L-request@midrange.com

Before posting, please take a moment to review the archives

at <http://archive.midrange.com/wdsci-l>.”

We hope this presentation helped you understand more about Development Studio Client iSeries application development tools. We started with an overview of our strategy for iSeries application development tools, went onto review the Remote System Explorer, the perspective for iSeries programmers to maintain and develop iSeries applications and explained how to extend RSE to include your own iSeries application development tools.

Legal information

Acknowledgement:

- This presentation is a collaborative effort of the IBM Toronto AS/400 Application Development presentation team, including work done by:

Phil Coulthard, George Farr, Claus Weiss, Inge Weiss, Don Yantzi, and David Slater

Disclaimer:

- The information contained in this document has not been submitted to any formal IBM test and is distributed on an as is basis without any warranty either express or implied. The use of this information or the implementation of any of these techniques is a customer responsibility and depends on the customers' ability to evaluate and integrate them into the customers' operational environment. While each item may have been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will result elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

Reproduction:

- The base presentation is the property of IBM Corporation. Permission must be obtained PRIOR to making copies of this material for any reason.

Trademarks & Disclaimers

© IBM Corporation 1994-2003. All rights reserved.

References in this document to IBM products or services do not imply that IBM intends to make them available in every country.

The following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

AS/400	IBM (logo)
AS/400e	iSeries
e (logo) business	OS/400
IBM	

Lotus, Freelance Graphics, and Word Pro are registered trademarks of Lotus Development Corporation and/or IBM Corporation. Domino is a trademark of Lotus Development Corporation and/or IBM Corporation.

C-bus is a trademark of Corollary, Inc. in the United States, other countries, or both.
Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.
Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
ActionMedia, LANDesk, MMX, Pentium and ProShare are trademarks of Intel Corporation in the United States, other countries, or both.
UNIX is a registered trademark of The Open Group in the United States and other countries.
SET and the SET Logo are trademarks owned by SET Secure Electronic Transaction LLC.
Other company, product and service names may be trademarks or service marks of others.

Information is provided "AS IS" without warranty of any kind.

All customer examples described are presented as illustrations of how those customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics may vary by customer.

Information in this presentation concerning non-IBM products was obtained from a supplier of these products, published announcement material, or other publicly available sources and does not constitute an endorsement of such products by IBM. Sources for non-IBM list prices and performance numbers are taken from publicly available information, including vendor announcements and vendor worldwide homepages. IBM has not tested these products and cannot confirm the accuracy of performance, capability, or any other claims related to non-IBM products. Questions on the capability of non-IBM products should be addressed to the supplier of those products.

All statements regarding IBM future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only. Contact your local IBM office or IBM authorized reseller for the full text of the specific Statement of Direction.

Some information in this presentation addresses anticipated future capabilities. Such information is not intended as a definitive statement of a commitment to specific levels of performance, function or delivery schedules with respect to any future products. Such commitments are only made in IBM product announcements. The information is presented here to communicate IBM's current investment and development activities as a good faith effort to help with our customers' future planning.

Performance is based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput or performance that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput or performance improvements equivalent to the ratios stated here.

Photographs shown are of engineering prototypes. Changes may be incorporated in production models.



IBM Software Group

Remote System Explorer in IBM WebSphere Development Studio Client for iSeries

WebSphere. software

iSeries AD Team. Toronto



 e-business software

© 2004 IBM Corporation