

IBM Storage Protect
8.2.0

Server Messages and Error Codes



Note:

Before you use this information and the product it supports, read the information in [“Notices” on page 901.](#)

Edition notice

This edition applies to version 8, release 2 of IBM Storage Protect (product numbers 5725-W98, 5725-W99, 5725-X15, 5725-X18) and to all subsequent releases and modifications until otherwise indicated in new editions.

© **Copyright International Business Machines Corporation 1993, 2025.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About this publication.....	V
Who should read this publication.....	V
Publications	V
Chapter 1. Introduction to messages.....	1
IBM Storage Protect server and client messages format.....	1
Interpreting return code messages.....	2
Chapter 2. ANE messages.....	5
ANE messages list.....	5
Chapter 3. ANR messages.....	49
ANR messages list.....	49
Chapter 4. I/O code descriptions in server messages.....	887
Device drivers completion code and operation code descriptions overview.....	888
Completion code values common to all device classes.....	888
Completion code values for media changers.....	889
Completion code values for tape drives.....	891
Standard ASC and ASCQ codes descriptions.....	893
ASC and ASCQ codes in the Windows Event Log entries.....	896
Chapter 5. Device error codes in the AIX system error log.....	897
Appendix A. Accessibility.....	899
Notices.....	901
Glossary.....	905

About this publication

IBM Storage Protect is an enterprise-wide storage management application for the network. It provides automated storage management services to multi-vendor workstations, personal computers, and local area network (LAN) file servers.

This publication contains explanations and suggested actions for messages issued by the IBM Storage Protect server.

Who should read this publication

The target audience for this publication is system administrators who service the IBM Storage Protect components. In this publication, it is assumed that you have a working knowledge of the IBM Storage Protect server and client components.

Publications

The IBM Storage Protect product family includes, IBM Storage Protect for Virtual Environments, IBM Storage Protect for Databases, and several other storage management products from IBM®.

To view IBM product documentation, see [IBM Documentation](#).

Chapter 1. Introduction to messages

Messages, error codes, and return codes are issued by the IBM Storage Protect server and clients.

Messages and codes can appear on the server console, the administrative client, an operator terminal, the administrative graphical user interface, the backup-archive client, or the hierarchical storage management client (HSM client).

IBM Storage Protect provides an activity log to help the administrator track server activity and monitor the system. The activity log contains messages generated by the server, and is stored in the database. The server automatically deletes messages from the activity log after they have passed the specified retention period. Any messages sent to the server console are stored in the activity log. Examples of the types of messages stored in the activity log include:

- When client sessions start or end
- When migration starts or ends
- When backed up files are expired from server storage
- Any output generated from background processes

Some messages have no explanations and are not published. The client can send statistics to the server providing information about a backup or restore. These statistics are informational messages that can be enabled or disabled to the various event logging receivers. These messages are not published.

IBM Storage Protect server and client messages format

IBM Storage Protect server and client messages consist of the following elements:

- A three-letter prefix. Messages have different prefixes to help you identify the IBM Storage Protect component that issues the message. Typically, all messages for a component have the same prefix. Sometimes a component issues messages with two or three different prefixes.

For example, backup-archive clients issue messages with the ANS prefix. Backup-archive client events that are logged to the server have the ANE prefix. Server common and server platform-specific messages have the ANR prefix.

- A numeric message identifier.
- A one-letter severity code. The following codes indicate the severity of the action that generated the message:

Code	Severity	Meaning
S	Severe	The product or a product function cannot continue. User response is required.
E	Error	An error is encountered during processing. Processing might stop. User response might be required.
W	Warning	Processing continues, but problems might occur later as a result of the warning.
I	Information	Processing continues. User response is not necessary.

- Message text that is displayed on screen and written to message logs.
- Explanation, System Action, and User Response texts. These texts elaborate on the message text, and are available in the product messages publications and in the command line help.

The following image presents a typical IBM Storage Protect server message.

The callouts identify each element of the message.



Message variables in the message text appear in italics.

Interpreting return code messages

Many different commands can generate the same *return code*. The following examples are illustrations of two different commands issued that result in the same return code; therefore, you must read the *descriptive message* for the command.

In these examples, two different commands yield the same return code, but they also return descriptive messages that are unique to each command. The two commands are `q event standard dddd` and `def vol cstg05 primary`. Both yield a generic message with return code:

```
ANS5102I: Return Code 11.
```


But the first command also yields a descriptive message:

```
ANR2034I: QUERY EVENT: No match found for this query.
```


And the second command also yields a unique, descriptive message:

```
ANRxxxx: DEFINE VOLUME: Storage pool CSTG05 is not defined.
```


QUERY EVENT command example

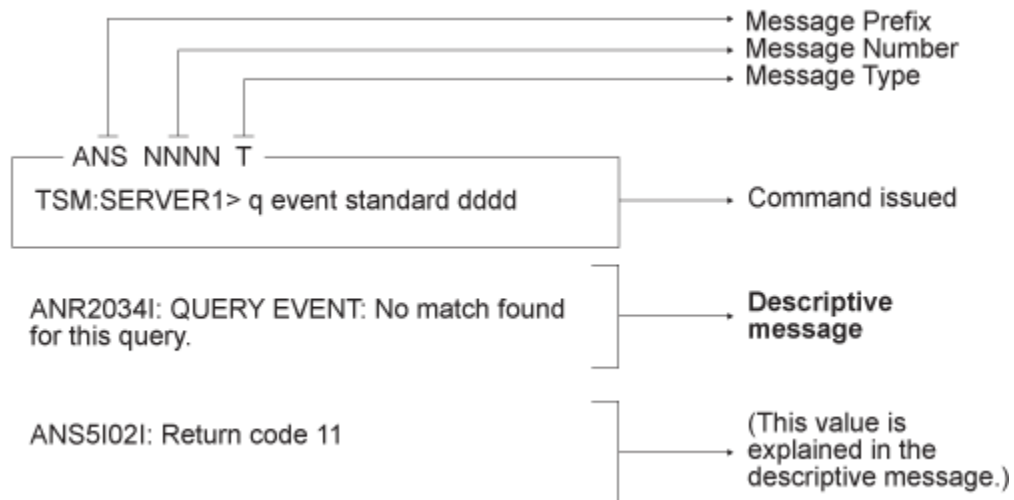

DEFINE VOLUME command example

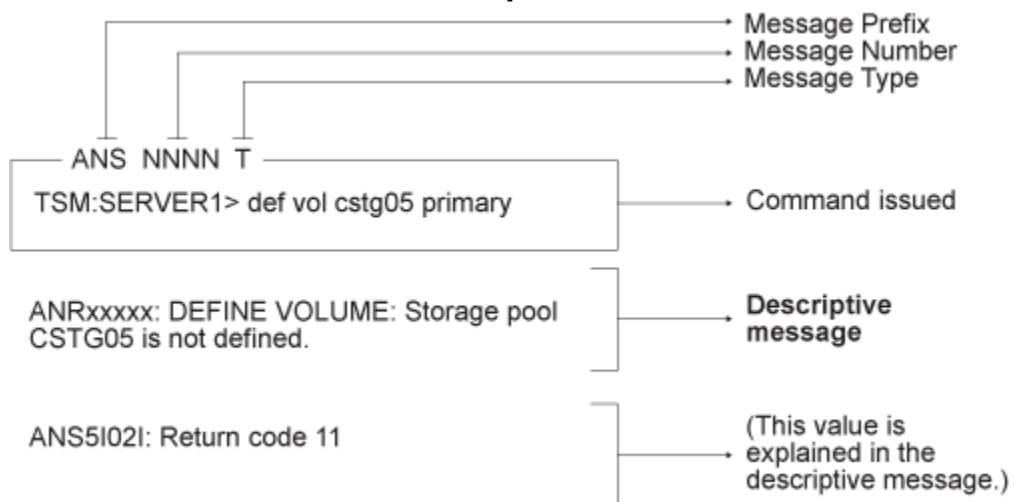

Chapter 2. ANE messages

ANE messages are issued by the server. All messages with the ANE prefix are client events logged to the server.

ANE messages list

Messages are listed in ascending numerical order. All elements of the message are documented.

For a list of new, changed, and deleted server messages, see the following files in the server installation directory:

Release_msg_chgs

This file contains all new, changed, and deleted messages from the previous server version to the current version.

Maint_msg_chgs

This file contains all new, changed, and deleted messages from the current server version to the current release.

These files are in the *installation_directory*\doc directory for Windows operating systems and the *installation_directory*/server/bin/ directory for all other operating systems.

ANE messages

**ANE4000E Error processing 'filespace-name':
file space does not exist.**

command was issued to delete the file space from the server while the current operation was in progress.

Explanation

The specified file space (domain) is incorrect or does not exist on the workstation. If the message results from the BACKUP IMAGE command with the -MODE=INCREMENTAL option, it means that you have entered the name of a raw logical volume. The MODE=INCREMENTAL option is not valid for raw logical volumes.

System action

Processing stops.

User response

Try the operation again, specifying an existing domain (drive letter or file system name). If the message resulted from improper use of the MODE=INCREMENTAL option, try the command again, omitting that option.

System action

IBM Storage Protect processing stops.

User response

Try the operation again. If the problem recurs, check the error log for any other messages that might indicate a reason for the failure. Try to correct any indicated problems, then try the operation again. If the problem persists, contact IBM technical support for further assistance.

**ANE4001E The file space for domain
'filespace-name' could not be
found on the IBM Storage Protect
server.**

**ANE4002E Error processing 'filespace-name':
volume label does not exist**

Explanation

The selected drive does not have a label.

System action

IBM Storage Protect is unable to do the requested operation without a drive or label entered.

User response

If the drive is a floppy drive, place a disk with a volume label in it and retry the operation. If the disk is a hard drive, ensure the drive has a volume label, and retry the operation.

Explanation

The specified file space was expected to be found on the server, but it no longer exists. It is possible that a

ANE4003E **Error processing '*filesystem-name*': duplicate volume label encountered**

Explanation

The selected drive has a duplicate volume label. Because IBM Storage Protect uses the volume label to keep track of backup/archive information, it cannot back up or archive files from a drive with a duplicate volume label.

System action

IBM Storage Protect cannot select the drive.

User response

If the volume needs to be available to the system, exit IBM Storage Protect, and assign a volume label to the drive. Restart IBM Storage Protect and retry the operation.

ANE4004E **Error processing '*filesystem namepath-namefile-name*': destination file or directory is write locked**

Explanation

The file or directory being restored or retrieved from the server cannot be written to because the destination is write locked. Another operation might have the file open and will not allow it to be updated.

System action

File skipped.

User response

Either determine which operation has the file write locked, or restore the file to another name or location.

ANE4005E **Error processing '*filesystem namepath-namefile-name*': file not found**

Explanation

The file being processed for backup, archive or migrate no longer exists on the client. Another process deletes the file before it can be backed up, archived or migrated by IBM Storage Protect.

System action

File skipped.

User response

None.

ANE4006E **Error processing '*filesystem namepath-namefile-name*': directory path not found**

Explanation

The operating system returned a "path not found" status when IBM Storage Protect attempted to access the directory. You either have specified a directory that does not exist, as shown in the message (*path-name*), or the directory being processed no longer exists on the client because another process deleted it before it could be backed up or archived by IBM Storage Protect.

System action

The directory is skipped, processing continues

User response

Recheck all spelling and punctuation, particularly the placement of directory delimiters (for example, "\"). Correct the syntax if it is incorrect, then retry the operation. Ensure that the path is specified correctly and that the directory actually exists. Retry the command with the corrected path and directory name. If you cannot correct the directory name, use the Exclude option to exclude the directory from the operation.

ANE4007E **Error processing '*filesystem namepath-namefile-name*': access to the object is denied**

Explanation

Access to the specified file or directory is denied. You tried to read from or write to a file and you do not have access permission for either the file or the directory.

System action

Processing stopped.

User response

Ensure that you specified the correct file or directory name, correct the permissions, or specify a new location. If HSMOPTIMIZEDRECALLONLY is set on the file system owner node, recall this file via optimized recall prior to the next backup.

ANE4008E **Error processing '*filesystem
namepath-namefile-name*': file is
temporarily unavailable**

Explanation

File is temporarily unavailable.

System action

File skipped.

User response

Check and see if file is locked by other process. If not, retry the command.

ANE4009E **Error processing '*filesystem
namepath-namefile-name*': disk
full condition**

Explanation

No more files can be restored or retrieved because the destination disk is full.

System action

The client prompts you for action:

- Retry this object
- Skip this object
- Abort the action

User response

Select the appropriate action for this object. Create some free space on the destination disk before you retry the operation. Another option is to restore or retrieve the file to another disk.

ANE4010E **Error processing '*filesystem
namepath-namefile-name*': stale
NFS handle**

Explanation

An NFS file system becomes stale.

System action

File system skipped.

User response

Verify that the NFS file system is mounted. If the problem persists, unmount and remount the file system, then try the operation again.

ANE4011E **Error processing '*filesystem
namepath-namefile-name*': no file
handles available**

Explanation

All file handles for your system are currently in use. No more are available.

System action

Processing stopped.

User response

Either free some file handles by ending other processes, or modify your system setup to allow for more files to be open at the same time.

ANE4012E **'*filesystem namepath-namefile-
name*' already exists. It will be
skipped.**

Explanation

The client tried to restore or retrieve the specified file, but the file already existed in the target restore location and the user chose not to replace the existing file.

System action

The file is skipped, a message is logged in dsmerror.log, and restore or retrieve processing continues with the next object.

User response

The file was skipped because either REPLACE NO was in effect, causing all existing files and directories to be skipped, or REPLACE PROMPT was in effect, and when prompted, the user chose to skip this file or all existing directories and files. No additional action is necessary if the decision to skip the file was deliberate. Otherwise the operation can be retried using either REPLACE ALL REPLACE PROMPT.

ANE4013E **Error processing '*filesystem
namepath-namefile-name*': invalid
file handle**

Explanation

An internal system error occurred. A file operation failed because an invalid file handle was passed.

System action

Processing stopped.

User response

Report the problem to your system administrator, and then retry the operation.

ANE4014E	Error processing '<i>filesystem namepath-namefile-name</i>': unknown system error (error-code) encountered. Program ending.
-----------------	--

Explanation

An unrecognized and unexpected *error-code* occurred within the client program. This is a programming failure and the client program ends.

System action

processing stops.

User response

Try the operation again. If the problem continues, report the error to your IBM Storage Protect administrator.

ANE4015E	Error processing '<i>filesystem namepath-namefile-name</i>': unexpected IBM Storage Protect error (error-code) encountered
-----------------	---

Explanation

An unexpected error occurred. This might be a low-level system or communication error that IBM Storage Protect cannot handle or recover from.

System action

processing stops.

User response

Try the operation again. If the problem continues, look for other indications of system problems to determine where the problem exists. Most systems have error or event logs which may contain additional information. See your system administrator or IBM Storage Protect administrator for further help.

ANE4016E	Error processing '<i>filesystem namepath-namefile-name</i>': file is being executed; write permission denied
-----------------	---

Explanation

The current file cannot be opened to write to because it is currently being run by another operation.

System action

File skipped.

User response

Stop the operation that is running the file and retry the operation, or restore or retrieve the file to a different name or directory.

ANE4017E	Error processing '<i>filesystem namepath-namefile-name</i>': too many symbolic links were detected while resolving name
-----------------	--

Explanation

While trying to resolve the file name, too many symbolic links were found.

System action

File skipped.

User response

Ensure that you do not have a looping symbolic link for the file.

ANE4018E	Error processing '<i>filesystem namepath-namefile-name</i>': file name too long
-----------------	--

Explanation

The file name specified is too long to be handled by IBM Storage Protect.

System action

File is skipped.

User response

See the appropriate *Using the Backup-Archive Client* book for the particular operating system, for the file names that are handled by IBM Storage Protect.

ANE4019E	Error processing '<i>filesystem namepath-namefile-name</i>': file system is locked by system
-----------------	---

Explanation

File system cannot be accessed because it is locked by the system.

System action

IBM Storage Protect cannot complete the operation.

User response

See your system administrator.

ANE4020E	The data format for object '<i>filesystem namepath-namefile-name</i>' is unknown. The unknown format usually occurs when the file was backed up or archived by a later version of IBM Storage Protect.
-----------------	---

Explanation

When a file is backed up or archived, IBM Storage Protect includes some additional information about the file. This message is issued if IBM Storage Protect cannot recognize the information during a restore or retrieve operation. The most likely cause is that the file was backed up or archived with a newer version of IBM Storage Protect. If the file was backed up from a case-preserving but not case-sensitive file system, the file name might be displayed with incorrect casing. The incorrect casing does not otherwise affect processing since the file is skipped.

System action

The file is not restored or retrieved. Processing continues with the next file.

User response

Try the restore or retrieve operation again with a current version of the IBM Storage Protect client software. If the problem persists, contact IBM technical support for further assistance.

ANE4021E	Error processing '<i>filesystem namepath-namefile-name</i>': file system not ready
-----------------	---

Explanation

The file system/drive was not ready for access.

System action

Processing stopped.

User response

Ensure that the drive is available to IBM Storage Protect, and then retry the operation.

ANE4022E	Error processing '<i>filesystem namepath-namefile-name</i>': file system is invalid.
-----------------	---

Explanation

The drive was not available for access.

System action

processing stops.

User response

Ensure that the drive is operational, and then try the operation again. If this is unsuccessful, check the error log.

ANE4023E	Error processing '<i>filesystem namepath-namefile-name</i>': file input/output error
-----------------	---

Explanation

An error was found while reading from or writing to the file.

System action

File skipped.

User response

Check your system to ensure that it is operating properly.

ANE4024E	Error processing '<i>filesystem namepath-namefile-name</i>': file write error
-----------------	--

Explanation

An error was found while writing to the file.

System action

File skipped.

User response

Check your system to ensure that it is operating properly.

ANE4025E	Error processing '<i>filesystem namepath-namefile-name</i>': file exceeds user or system file limit
-----------------	--

Explanation

A file being backed up/restored or archived/retrieved exceeds system set limits for this user. Shown below are the filesize limits corresponding to various platforms.

AIX

68,589,453,312 (64GB)

HP-UX

1,099,511,627,775 (1TB-1)

Linux

2,147,483,647 (2GB)

Mac pre-OS9

2,147,482,624 (2GB-1K)

Mac OS9

18,446,744,073,709,551,616 (16EB)

NetWare

4,294,963,200 (4GB -4KB)

NUMA-Q DYNIX/ptx

4.5 1,095,216,660,480 (1TB-4GB)

OS/390

4,294,967,295 (4GB)

SGI

18,446,744,073,709,551,615 (16EB-1)

Solaris 2.6 or higher

1,099,511,627,775 (1TB-1)

Tru64 UNIX

1,099,511,627,776 (1TB)

UnixWare

2,147,483,647 (2GB)

Windows ME (FAT32)

4,294,967,295 (4GB)

Windows NT/2000 (NTFS)

17,592,185,978,880 (16TB-64K)

System action

File skipped.

User response

Ensure that the system limits are set properly.

ANE4026W	Error processing '<i>filespace namepath-namefile-name</i>': size of 'file-size' exceeded the maximum file size limit on your system
-----------------	--

Explanation

You tried to restore or retrieve a file that has exceeded the maximum file size limitation on your system.

System action

IBM Storage Protect cannot restore or retrieve the file.

User response

Restore or retrieve this file on a system that supports the file size. See your system administrator.

ANE4027S	Error processing '<i>filespace namepath-namefile-name</i>': internal program message '<i>value</i>' encountered
-----------------	--

Explanation

An unexpected catastrophic program failure occurred, indicated by *value*.

System action

Processing stopped.

User response

Retry the operation. If the problem continues, see your system administrator or service representative.

ANE4028E	Error processing '<i>filespace namepath-namefile-name</i>': cannot create file/directory entry
-----------------	---

Explanation

The directory path for files being restored or retrieved cannot be created.

System action

File skipped.

User response

Ensure that you have the proper authorization to create the directory for file being restored or retrieved.

ANE4029E	Error processing '<i>filespace namepath-namefile-name</i>': unable to build a directory path; a file exists with the same name as a directory
-----------------	--

Explanation

IBM Storage Protect tried to create a directory path, but is unable to because a file exists that has the same name as a directory.

System action

Processing stopped.

User response

Remove the file that has the same name as the directory. Refer to the last restore/retrieve operation and check all directories along the path.

ANE4030E	Error processing 'filespace namepath-namefile-name': disk space limit for this process reached
-----------------	---

Explanation

The disk space allocated for the client owner is full.

System action

Processing stopped.

User response

Free up disk space and retry the restore or retrieve operation.

ANE4031E	Error processing 'file_space_namepath_namefile_name'. Name exceeds an internal IBM Storage Protect limit.
-----------------	--

Explanation

During a file operation, IBM Storage Protect encountered a filename where at least one component of the file name (file_space_name, path_name or directory_name or file_name) exceeded an internal IBM Storage Protect maximum. The internal IBM Storage Protect limits should not be confused with the operating system limits for file_space_name, path_name or directory_name, file_name.

Shown below are the IBM Storage Protect internal file name limits for various platforms.

AIX HP-UX Solaris	
File_space_name	1024
Path_name or directory_name	1023
File_name	256
Linux	
File_space_name	1024
Path_name or directory_name	768
File_name	256
Windows XP/2000/2003	
File_space_name	1024
Path_name or directory_name	248
File_name	248

System action

The file is skipped.

User response

Reduce the size of the filename so that it is smaller than the IBM Storage Protect internal limits.

ANE4032E	Error processing 'filespace namepath-namefile-name': file is not compressed.
-----------------	---

Explanation

A file that was flagged as compressed was not compressed, and the system failed.

System action

Processing stopped.

User response

See your system administrator to report this problem. This error is a system failure.

ANE4033E	Error processing 'filespace namepath-namefile-name': file compressed on a different client machine that has more memory
-----------------	--

Explanation

You are trying to restore a file that was backed up and compressed on another client workstation that had more memory than your client workstation. You cannot restore this file. When the file is restored, it is expanded and your workstation does not have enough memory.

System action

IBM Storage Protect canceled the operation.

User response

Obtain a machine with more memory and retry the operation.

ANE4034E	Error processing 'filespace namepath-namefile-name': unknown system error
-----------------	--

Explanation

An unknown error occurred. This might be a low-level system or communication error that IBM Storage Protect cannot handle or recover from.

System action

Processing stopped.

User response

Retry the operation. If the problem continues, determine where the problem exists. See your system administrator for further help.

ANE4035W	File '<i>filesystem namepath-namefile-name</i>' currently unavailable on server.
-----------------	---

Explanation

You tried to restore or retrieve a file that is currently not available from the IBM Storage Protect server.

System action

IBM Storage Protect Cannot restore or retrieve the file.

User response

Try to restore or retrieve after the file was made available on the server. See your system administrator.

ANE4036E	An error occurred saving the registry key.
-----------------	---

Explanation

The active registry key cannot be copied to the ADSM.SYS staging directory.

System action

Registry backup operation terminates.

User response

Check the space available on the Windows boot partition to ensure there enough space to contain a copy of the Windows registry. This might require several megabytes of free space. Also check the Windows permissions on the ADSM.SYS staging directory and ensure that the Windows user under which you are running IBM Storage Protect has full access to that directory and its contents.

ANE4037E	Object '<i>file-namefile-namefile-name</i>' changed during processing. Object skipped.
-----------------	---

Explanation

The specified *file-name* was skipped during backup, archive, or migrate because it was changing during the attempt to process it.

System action

IBM Storage Protect skipped the object.

User response

If you want the file backed up, archived, or migrated, retry the operation. If it fails, determine why the object is being changed. For more information on backing up, archiving, or migrating changing objects, see your system administrator.

ANE4038E	An error occurred processing file system '<i>filesystem name</i>'.
-----------------	---

Explanation

File system '*filesystem name*' is corrupted or contains one or more corrupted directories and cannot be processed.

System action

File system is skipped.

User response

Check your system to ensure that it is operating properly. For the Windows environment, run CHKDSK utility for the failing drive. More information about corrupted directories can be found in dsmerror.log.

ANE4039E	Error processing '<i>filesystem namepath-namefile-name</i>': compressed file is corrupted and cannot be expanded.
-----------------	--

Explanation

The compressed file cannot be expanded correctly due to one of the following reasons:

- There is a problem on the tape.

- There is a communications problem.

- The compressed file was corrupted on the IBM Storage Protect Server.

System action

File skipped.

User response

1) The compressed file is corrupted because there is a problem on the tape. To know if this is the problem, please issue the following command on the IBM Storage Protect Server: audit volume <volume_name> fix=no If there is any problem reported, you could move the data from that volume to a new one (see

command MOVE DATA) and try again the restore. 2) There are communications problems between the IBM Storage Protect Server and the IBM Storage Protect Client and the results is that the file is corrupted during the transmission. If you use a gigabit ethernet adapter on the Server please upgrade the card driver (AIX platform) or add provided by SUN suggested changes to some system network options which have resolved this problem (SUN platform). 3) Please verify with your network support if during the restore there are no any problems between the IBM Storage Protect Client/ Server that is originating the file corruption.

ANE4040E **Error processing '*filesystem namepath-namefile-name*': file system *filesystem name* has exceeded its space management quota.**

Explanation

IBM Storage Protect detects that the file system has exceeded its quota. No more data can be migrated out of this file system.

System action

IBM Storage Protect will not migrate files from this file system.

User response

Recall some files, or ask the system administrator to increase the quota for this file system.

ANE4041E **A Windows Server 2008 or 2008 R2 VMware guest cannot be restored with a non-Windows data mover.**

Explanation

A Windows data mover must run certain commands to complete the restore of the Active Directory. Non-Windows data movers do not have the necessary tools to complete this operation. Windows VMware guests that are at Windows Server 2012 or higher are not affected by this restriction.

System action

Processing stops.

User response

Use a Windows data mover to complete this action.

ANE4042E **Object name '*filesystem namepath-namefile-name*' contains one or**

more unrecognized characters and is not valid.

Explanation

The file name, directory name, or volume label syntax is incorrect.

System action

The file is skipped.

User response

Check the disk for errors.

ANE4044E **Error processing '*filesystem-namepath-namefile-name*': Case-sensitive name conflict exists.**

Explanation

While processing the specified file on the workstation, another file name was encountered with a similar name which only differed in case. The Backup-Archive client does not allow names which differ only in case on this platform and cannot guarantee the integrity of the file, so the file is skipped.

System action

This object will be skipped.

User response

Rename the file in question to a unique name.

ANE4045E **Error processing '*filesystem-namepath-namefile-name*': Case-sensitive name conflict exists. The directory tree will be skipped.**

Explanation

While processing the specified file on the workstation, another object name was encountered with a similar name which only differed in case. The Backup-Archive client does not allow names which differ only in case on this platform and cannot guarantee the integrity of the file, so the directory and all of the objects contained within it are skipped.

System action

This object will be skipped.

User response

Rename the file in question to a unique name.

ANE4046E **There is an error processing '*filespace-namepath-namefile-name*': the object is corrupted and unreadable.**

Explanation

You tried to read from or write to a file or directory that is corrupted. The corrupted file is skipped. If this is a directory, the objects contained in the directory and its subdirectories are skipped.

System action

This object will be skipped.

User response

Check your system to ensure that the filespace is not corrupted by using system tools like chkdsk (Windows) or fsck (UNIX).

ANE4047E **There is a read error on '*file-namefile-namefile-name*'. The file is skipped.**

Explanation

The specified *file-name* was skipped during backup archive because the file could not be read.

If you are performing a JFS2 snapshot based operation, it is possible that the snapshot was not large enough to contain all the changes made to the filesystem after the snapshot was created. This could cause the snapshot to become invalid thereby preventing IBM Storage Protect client from reading the snapshot.

System action

IBM Storage Protect skipped the file.

User response

Check your system to ensure that it is operating properly.

If you are performing a JFS2 snapshot based operation, please use the default snapshotcachesize of 100% and ensure that the volume group has sufficient disk space to allocate snapshots at least as large as the file system and retry the operation.

ANE4048W **LAN-Free connection failed.**

Explanation

ENABLELANFREE option is set to YES for this session, but an attempt to establish LAN-Free connection failed.

System action

The IBM Storage Protect client will failover to non LAN-Free support.

User response

Review the IBM Storage Protect error.log for LAN-Free failures. Check your LAN-Free setup and verify that all components are working properly.

ANE4049I **Established LAN-Free connection.**

Explanation

ENABLELANFREE option is set to YES for this session and the IBM Storage Protect client successfully established LAN-Free connection with server, after the LAN-Free connection was broken.

System action

The IBM Storage Protect client will communicate with the server via LAN-Free.

User response

Review the IBM Storage Protect error.log for LAN-Free errors. Check your LAN-Free setup and verify that all components are working properly.

ANE4050W **Scheduled action '*schedule-action*' did not execute for schedule '*schedule-name*' as the IBM Storage Protect administrator has been disabled from executing the scheduled action on the client.**

Explanation

One or more of the client options - schedcmddisabled, srvprepostscheddisabled, srvprepostsnapdisabled, restrtrscheddisabled, have been set to YES on the client thereby preventing the IBM Storage Protect administrator from executing one of the following scheduled actions on the client - preschedule, postschedule, presnapshot, postsnapshot or scheduled operating system commands, restore or retrieve operations.

System action

The scheduled operation will not be executed and a message will be logged to IBM Storage Protect Server indicating this.

User response

None required.

ANE4051E	Error processing '<i>filepath-namefile-name</i>': The decryption option is in effect, but the user ID under which back-up or archive is being run is not authorized to decrypt this encrypted-file-system (EFS) file.
-----------------	--

Explanation

The file being processed is encrypted by an encrypted file system (EFS). The option is specified to back-up or archive the file in decrypted form. The user ID under which the back-up or archive is being run does not have decryption rights for this file.

System action

The file is skipped.

User response

There are three possible ways to make decryption work:

- Re-encrypt the file under the encryption key of a group to which both the owner and the back-up/archive user IDs belong
- Add the back-up/archive user ID to the list of users authorized to decrypt this file
- Run the back-up or archive under the owner's user ID, if possible

ANE4052E	Error processing '<i>filepath-namefile-name</i>': Encrypted-file-system (EFS) file cannot be restored, because file system does not support restore from the raw-EFS back-up data, or possibly because the restore function does not have write access to the directory.
-----------------	---

Explanation

The file being processed is encrypted by an encrypted file system (EFS). The file was backed up in the raw encrypted format. Either the target filesystem does not support the encrypted format, or restore does not have

write access to the directory to which the file is to be restored.

System action

The restore is terminated.

User response

- The file cannot be restored to this location if the file system is not the AIX Enhanced Journaled File System (JFS2)
- If the file is JFS2 but EFS is not enabled, then EFS must be enabled before the file can be restored
- If the user ID under which restore is being run does not have write permission for the directory, the permissions must be changed or the restore must be run under a different user ID

ANE4053E	Error processing '<i>filepath filename</i>': The file cannot be restored because the file system or operating system does not support the Encrypting File System (EFS) data.
-----------------	---

Explanation

The specified object was backed-up as raw Encrypting File System (EFS) data. The client is trying to restore or retrieve the object to a destination that does not support the EFS data. The location might not support the EFS data for one of the following reasons:

- The operating system does not provide the support, or is a release that does not include the support
- EFS support has not been activated on the operating system
- The target file system does not support the EFS data

System action

The object is not restored or retrieved. Processing continues with the next object.

User response

If this file must be restored, restore it to an AIX operating system environment supporting EFS data.

ANE4054E	Error processing '<i>filepath-namefile-name</i>': The encryption key is not loaded.
-----------------	--

Explanation

The file being processed is encrypted by an encrypted file system (EFS). The option is specified to backup or

archive the file in decrypted form. The encryption key, required to decrypt the file, is not loaded in the kernel keyring.

System action

The file is skipped.

User response

There are three situations in which this problem can occur:

- You just performed initial activation of EFS on the AIX system, and have not logged out. AIX does load the keys for the session running at the time of initial activation. Solution: Logout and login again.
- The login password has been changed recently, and you normally run with the EFS password the same as the login password. AIX does not automatically change the EFS password when you change the login password. Solution: Issue 'efskeymgr -n' to set the EFS password to be the same as the login password.
- You need to run the decrypting backup when the EFS password is different from the login password. Solution: Issue 'efskeymgr -o ksh' to launch a new shell with the keys loaded. AIX will prompt you for the EFS password as you launch the shell. Run the backup from the new shell.

ANE4055E **Cannot update file space 'filespace-name': the file space version on the IBM Storage Protect server is not compatible with this client**

Explanation

The file space on the IBM Storage Protect server is not compatible with this client. This is caused by performing a backup or archive operation with a client and then using a down-level client and attempting a backup or archive operation targeting the same file space.

This problem occurs specifically after a Windows or AIX client V6.1 or higher performs a backup or archive operation and then a subsequent backup or archive operation is attempted with a client V5.5 or lower.

System action

Processing stops.

User response

Use the correct level of the client.

ANE4056E **Object 'object-name' returned by the IBM Storage Protect server has a high-level name that exceeds the maximum length of 6000 characters. The file or directory cannot be processed.**

Explanation

The IBM Storage Protect server returned information about a backup or archive version with a high level name that exceeds 6000 characters. The high-level name is the directory path that contains the object (file or directory).

This message is displayed when all of the following conditions are true:

- The object was backed up or archived by a version 6.1 or lower IBM Storage Protect client.
- The object was backed up or archived to a version 5.5 or lower IBM Storage Protect server.
- IBM Storage Protect client version 6.2 or higher is attempting to perform an operation that causes the IBM Storage Protect server to return information about this object to the client. Note: During incremental backup, the server returns information to the client about active backup versions which is used to determine which files have changed.

Beginning with IBM Storage Protect server version 6.1, the maximum high level name length was reduced from 8192 characters to 6000 characters. Objects with high level names that exceed 6000 characters are not supported for backup or archive. Beginning with IBM Storage Protect backup-archive client version 6.2, the maximum high level name length was similarly reduced.

System action

The file or directory specified in the message is skipped. Processing will continue with the next object.

User response

Contact your IBM Storage Protect server administrator for further assistance.

ANE4057W **Unable to process object 'fs' with nested file system mounted on it during snapshot based backup.**

Explanation

Snapshot based backup of objects with mounted file systems on them are not supported.

System action

The backup operation continues without specified object.

User response

To prevent this behaviour unmount file system from specified object and retry the operation.

ANE4058I	A write failure occurred while attempting to save node replication failover values to the options file.
-----------------	--

Explanation

A write failure is often a result of insufficient access permissions to the options file, but could also be caused by the lack of available disk space. The replication server connection information can not be saved and failover will not be possible.

System action

The operation failed.

User response

Check the local disk for possible causes of the write error, and check to see that sufficient access to the options file is configured.

ANE4059I	The option USEREPLICATIONFailover is set to NO. The node will not fail over to the failover server
-----------------	---

Explanation

This option will prevent the node from connecting to the replication server in the event of a failure of the primary server.

System action

The client will not connect to the primary server and processing stops.

User response

No response is required.

ANE4061I	Connected to failover server <i>failover server</i>; in fail over mode. Home server is: <i>home server</i>;
-----------------	--

Explanation

The node is configured for replication and has successfully connected to the failover server. This message is to notify the server administrator that a node has connected to the failover server in fail over mode.

System action

Processing continues.

User response

None.

ANE4063W	IBM Storage Protect application protection cannot copy the application metafile '<i>App-Metadata-File-Name</i>' from the following VM: '<i>VM-Name</i>'. Individual database restore from this backup is not supported. Check health of application writers and databases
-----------------	--

Explanation

The application metafile was not found on the guest machine.

System action

The operation completes. However, the application metafile was not copied.

User response

Make sure that the application VSS writers are running on this guest machine, and the application database is in the state to allow the backup. For Exchange check that databases are mounted. For SQL check databases are online. Then try the operation again.

ANE4064I	Restoring vCloud Director vApp '<i>vapp name</i>' from Organization VDC '<i>org vdc name</i>' from organization '<i>org name</i>'. Target vApp name is '<i>restored vapp name</i>'. Restore VAPP command started. Total number of vApps to process: <i>vapps num to restore</i>
-----------------	--

Explanation

The restore vApp operation completed.

System action

This message is for informational purposes only.

User response

No action is required.

ANE4065E	Proxy rejected: data mover node 'dm node' has not been granted proxy authority for target node 'target_node', associated with Organization vDC 'OVDC name' of Organization 'Org Name'.
-----------------	---

Explanation

The operation requires that a proxy access for the data center node is granted to the data mover node.

System action

Operation is canceled for the specified vApp.

User response

Run configuration wizard or configuration editor to configure proper nodes relationship.

ANE4066I	Snapshot operation attempt x of y for the guest virtual machine 'VM' failed using "sType" snapshot. Reattempting snapshot with "sType2" snapshot.
-----------------	--

Explanation

The snapshot operation has failed. A snapshot retry operation has been scheduled.

System action

Retrying snapshot.

User response

Check the error log for any other messages that might indicate a reason for the failure. Correct any problems and try the operation again.

ANE4067E	Snapshot operation attempt x of y for the guest virtual machine 'VM' failed using "sType" snapshot. Backup failed.
-----------------	---

Explanation

All snapshot retry attempts of the guest virtual machine failed.

System action

Processing stops.

User response

Check the error log for any messages that indicate a reason for the failure. Correct any problems and try the operation again. If the problem persists, search the IBM Storage Protect Support web site (<http://www.ibm.com/software/sysmgmt/products/support/IBMTivoliStorageManager.html>) for known solutions.

ANE4068I	Restored virtual machine 'VM' was backed up using a "VMware Tools with file system quiescing and application quiescing disabled" snapshot. This is equivalent to a "crash-consistent" backup.
-----------------	--

Explanation

The restored virtual machine was backed up using a "VMware Tools with file system quiescing and application quiescing disabled" snapshot. Application Protection feature is not available.

System action

Restore of the VM continues.

User response

None

ANE4069E	The Windows domain credentials cannot be found. Use the Data Protection for VMware vSphere GUI configuration editor to set the Windows domain credentials.
-----------------	---

Explanation

The required Windows domain administrator credentials were not set.

System action

Processing stops.

User response

Set the Windows domain administrator credentials in the Data Protection for VMware vSphere GUI configuration editor.

ANE4070E **Windows domain credentials are incorrect. Verify the credentials and use dsmc SET PASSWORD -type=DOMAIN 'domain\userid' 'password' to update the username and password.**

Explanation

The supplied credentials are incorrect. The system failed to authenticate to the Windows domain using these credentials.

System action

Processing stops

User response

Use dsmc SET PASSWORD -type=DOMAIN 'domain\userid' 'password' to update the username and password. And then retry the operation.

ANE4071E **'VM-Name' cannot be restored because it was backed up with a newer version of the client.**

Explanation

The client version that attempted to restore the virtual machine is earlier than the client version that backed up the virtual machine. The virtual machine cannot be restored with an earlier client version.

System action

The virtual machine is not restored. Processing continues with the next virtual machine.

User response

Upgrade the client to a version that is compatible with the client version that backed up the virtual machine.

ANE4072E **Error processing 'filesystem namepath-namefile-name': unable to create symbolic link; a file or directory exists with the same name as the symbolic link**

Explanation

IBM Storage Protect tried to create a symbolic link, but is unable to because a file or directory exists that has the same name as the symbolic link.

System action

Processing stops.

User response

Remove the file or the directory that has the same name as the symbolic link. Refer to the last restore/retrieve operation.

ANE4073W **Snapshot operation attempt x of y for the guest virtual machine 'VM' failed using "sType" snapshot. Reattempting snapshot with "sType2" snapshot.**

Explanation

The snapshot operation has failed. A snapshot retry operation with different snapshot type has been scheduled.

System action

Retrying snapshot with different snapshot type.

User response

Check the error log for any other messages that might indicate a reason for the failure. Correct any problems and try the operation again.

ANE4077E **File 'filesystem namepath-namefile-name' is encrypted by Microsoft EFS and contains at least one sparse data stream. The operating system does not support restore for this file so it is not backed up or restored.**

Explanation

An error in the Microsoft Windows API prevents successful restore of files that meet the following conditions:

- The file is encrypted by Microsoft Encrypting File System (EFS) at the time it was backed up
- The file includes at least one data stream (alternate "named" stream or unnamed stream) that is sparse
- The operating system is any edition of Microsoft XP, Microsoft Windows Server 2003, or Microsoft Windows Server 2003 R2

Because the file cannot be restored, IBM Storage Protect does not back it up. The problem is documented by Microsoft at <http://support.microsoft.com/kb/2525290>.

System action

The file is not backed up or restored. Processing continues with the next object or ends if there are no further objects.

User response

If this message is issued during a backup operation, you can do the following:

- Disable EFS encryption for the file so that it can be backed up.
- If a backup copy of the file is not necessary, you can exclude it from backup.

ANE4078E	Content file content.spsig is missing, is damaged or failed the signature check.
-----------------	---

Explanation

The file content.spsig is missing. Or the file is damaged or the signature of the file does not match. See client log file for more information.

System action

Processing stops.

User response

Make sure that the data in the Operations Center, such as the client package or Update Manager package, is correct or download the correct version in the Operations Center.

ANE4079E	One or more files failed the signature check.
-----------------	--

Explanation

The signature of one or more files does not match the contents of content.spsig. See the client log file for more information.

System action

Processing stops.

User response

Make sure that the data in the Operations Center, such as the client package or Update Manager package, is correct or download the correct version in the Operations Center.

ANE4081E	Error processing '<i>filesystem-name</i>': file space type is not supported.
-----------------	---

Explanation

The specified file space type is not currently supported by IBM Storage Protect on this platform.

System action

The unsupported file system is skipped. Processing continues with the next file system.

User response

Refer to the documentation for information on what file space types are supported.

ANE4083I	New node password has been generated.
-----------------	--

Explanation

The client logged in using administrative id rather than node name. New random node password has been generated and recorded.

System action

Processing continues.

User response

None.

ANE4084E	Error processing '<i>filesystem-namepath-namefile-name</i>': cannot get file status.
-----------------	---

Explanation

While processing the file, the lstat() call set EOVERFLOW error code.

System action

This file will be skipped.

User response

The file is skipped. Processing continues with the next file.

ANE4085I	Assigned '<i>number</i>' objects from previous systemstate backup to the new systemstate backup.
-----------------	---

Explanation

Objects in the previous System State backup have not changed and were assigned to the new System State backup.

System action

Processing continues.

User response

None.

ANE4086W	Failed to assign unchanged objects from previous systemstate backup to the new systemstate backup. Objects will be backed up.
-----------------	--

Explanation

Objects in the previous System State backup have not changed and should be assigned to the new systemstate backup. Due to error assign operation failed and objects will be backed up.

System action

Processing continues.

User response

Retry the operation. If the problem persists, contact IBM Storage Protect technical support.

ANE4087E	An attempt to load data for the wizard failed. For more information, please see the log file.
-----------------	--

Explanation

An attempt to load data for the wizard failed as the remote agent is probably unavailable.

System action

Processing stopped.

User response

Check the log for reason for the failure.

ANE4089W	File server <i>file-server-name</i> has been upgraded to Data ONTAP version '<i>version.modifcation.submodificati on</i>'. Perform a full incremental backup by specifying option createnewbase=migrate as soon as possible.
-----------------	---

Explanation

The file server has been upgraded to a version that supports unicode file names for incremental backup using snapshot difference. Perform a full incremental in order to backup any files with unicode names that may have been skipped by the previous version of the IBM Storage Protect client.

System action

Processing continues.

User response

Perform a full incremental by specifying the command line option createnewbase=migrate with the snapdiff option as soon as possible.

ANE4090I	File server <i>file-server-name</i> has been upgraded to Data ONTAP version '<i>version.modifcation.submodificati on</i>'. Perform a full incremental backup by specifying option createnewbase=migrate as soon as possible.
-----------------	---

Explanation

The file server has been upgraded to a version that supports unicode file names for incremental backup using snapshot difference. Perform a full incremental in order to backup any files with unicode names that may have been skipped by the previous version of the IBM Storage Protect client.

System action

Processing continues.

User response

Perform a full incremental backup by specifying the command line option createnewbase=migrate with the snapdiff option as soon as possible.

ANE4092E	Data mover platform is not supported for instant access/restore operations.
-----------------	--

Explanation

The instant access/restore operation failed.

System action

The instant access/restore operation failed. The reason for the failure is unsupported platform.

User response

The instant access/restore operation should be performed from a supported data mover platform.

ANE4099E	The system volume cannot be identified. Therefore the system state cannot be backed up.
-----------------	--

Explanation

The system volume contains the hardware-specific system state files that are needed to start Windows, such as Ntldr, Boot.ini, Ntdetect.com or Bootmgr. If the system volume cannot be identified, then these files cannot be backed up. Therefore it is not possible to back up the system state.

System action

Systemstate backup stops.

User response

Try the operation again. If the problem persists, obtain a service trace that captures the problem and contact IBM technical support for additional assistance. Your IBM Storage Protect administrator can help you configure the trace.

ANE4137E	Error processing '<i>filepath-namefile-name</i>': exceeded maximum number of links allowed
-----------------	---

Explanation

Link cannot be restored or retrieved because the destination file system has exceeded maximum number of links allowed.

System action

The client prompts you for action:

- Skip this object
- Abort the action

User response

Select the appropriate action for this object. Restore or retrieve the link to another file system.

ANE4148E	Full VM backup of Virtual Machine '<i>vmname</i>' failed with RC <i>rc</i>
-----------------	---

Explanation

The Full VM backup of virtual machine failed.

System action

The full backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4150E	Incremental backup of Virtual Machine '<i>vmname</i>' failed with RC <i>rc</i>
-----------------	---

Explanation

The incremental backup of virtual machine volumes failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4151E	Failure mounting Virtual Machine '<i>vmname</i>'. RC=<i>rc</i>
-----------------	---

Explanation

The VMware failed to mount virtual machine disk.

System action

The backup of the virtual machine can not continue. The next virtual machine in the vmlist will be processed. Refer to dsmerror.log for detailed error message for the reason for the failure.

User response

Refer to dsmerror.log for detailed error message.

ANE4152E	Failure initializing VMware virtual machine environment. RC=<i>rc</i>. Refer to IBM Storage Protect error log for detailed error messages.
-----------------	---

Explanation

Failure initializing VMware virtual machine environment. Refer to IBM Storage Protect error log for detailed error messages.

System action

The backup can not continue.

User response

Refer to IBM Storage Protect error log for detailed messages.

ANE4153E	Hostname could not be found for Virtual Machine 'vmname'
-----------------	---

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4154E	Possible cause Virtual Machine is not running and does not have a static IP address.
-----------------	---

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4155E	The virtual machine 'vmname' was not found on the vSphere server.
-----------------	--

Explanation

The backup of the virtual machine failed because the specified virtual machine name was not found. It is possible that the virtual machine name was entered incorrectly or contains unsupported characters. Only virtual machine names that contain 7-bit ASCII characters are supported, and the operation will fail if the name contains other characters.

System action

The backup of the virtual machine failed. The next virtual machine in the vmlist will be processed. Check the client error log for additional error messages.

User response

Check the local client error log for reason for the failure.

- If the virtual machine name was entered incorrectly, try the operation again with the correct machine name.
- If the virtual machine name contains characters other than 7-bit ASCII characters, either change the virtual machine name so it contains only 7-bit ASCII characters, or do not include the virtual machine for backup operations.

ANE4156E	File level VM backup of virtual machine 'vmname' not supported. File level VM backup not support on non Windows platform guest OS. Platform type: 'platform'.
-----------------	--

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Back up the virtual machine using the VMBACKUPTYPE=FULLvm option.

ANE4159E	Backup of Virtual Machine 'vmname' failed. rc=rc.
-----------------	--

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4160E	Proxy Rejected: Proxy authority has not been granted to Agent Node: 'agent_node' for Target Node: 'target_node'.
-----------------	---

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is the node has not been granted proxy authority to access the node named by the backup proxy node. The IBM Storage Protect administrator must first grant proxy authority.

User response

The IBM Storage Protect server administrator must grant proxy authority for this node. See the administrator command "Grant Proxynode".

ANE4161E	Duplicate virtual machine name 'vmname' was detected in the same backup operation. Backup of virtual machine 'vmfullname' can not continue without a unique object name.
-----------------	---

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Choose a unique name for the virtual machine.

ANE4162E	The virtual machine '<i>virtual-machine-name</i>' has not been previously backed up.
-----------------	---

Explanation

The specified virtual machine has not been previously backed up, so can not be specified for restore.

System action

The specified virtual machine is skipped, and the next virtual machine in the restore list is processed.

User response

Verify the virtual machine name to be restored, and re-try the operation.

ANE4164W	Compression is currently enabled, but the virtual machine backup for '<i>virtual-machine-name</i>' is not compressed because client-side deduplication is not being used.
-----------------	--

Explanation

Compression can only be used with virtual machine CTL and Data files when the files are stored in a storage pool that is enabled for client-side deduplication. This message is issued when the client is configured for compression and virtual machine CTL or Data files are directed to a storage pool that is not enabled for client-side deduplication.

System action

Backup continues, and data is not compressed.

User response

If you intend to compress virtual machine CTL and Data files, then update your IBM Storage Protect configuration so that both types of files are directed to storage pools that are enabled for client-side deduplication. If you intend to compress virtual machine Data files but not CTL files, then update your IBM Storage Protect configuration so that the Data files are directed to a storage pool that is enabled for client-side deduplication. Set the VMSKIPCTLCOMPRESSION to YES in your client options file. If you do not intend to use compression, then set COMPRESSION NO in your client options file.

ANE4165E	Creating a Virtual Machine, but the hostname '<i>virtual-machine-name</i>' was not found.
-----------------	--

Explanation

The Virtual Machine being creating must have a valid hostname to be created.

System action

Check the virtual machine hostname specified for correctness.

User response

Correct the virtual machine hostname specified and retry the restore.

ANE4166E	Creating a Virtual Machine, but the datacenter '<i>virtual-machine-name</i>' was not found. The name may be incorrect or may be located in a VMware folder and require the folder name such as vmfolder/dcname.
-----------------	--

Explanation

The Virtual Machine being created must have a valid datacenter to be created.

System action

Processing stops.

User response

Check the virtual machine datacenter specified for correctness. If the datacenter is contained in a folder then the full datacenter name, complete with the folder path, must be specified, such as vmfolder/dcname.

ANE4167E	Creating a Virtual Machine, but the datastore '<i>virtual-machine-name</i>' was not found.
-----------------	---

Explanation

The Virtual Machine being creating must have a valid datastore to be created.

System action

Check the virtual machine datastore specified for correctness.

User response

Correct the virtual machine datastore specified and retry the restore.

ANE4168E	VMware has reported an error via their SOAP interface. On the Detailed Status Report panel, view the last error message reported. Also check the error log for more information about the problem that occurred.
-----------------	---

Explanation

The command to VMware failed to complete. The error returned is displayed on the Restore or Backup summary panel under the Last Error Message section.

System action

An error occurred, and the operation failed.

User response

Check the reported error and correct the problem. Usually the reason for the error is a user-supplied value which is not valid for the operation.

ANE4169E	A write failure occurred on the local disk proxy used to temporarily store the virtual machine virtual disk information. The write failure can be caused by the lack of available disk space on the drive used to store this information. The VMBACKDIR option can be used to assign a different disk location for this purpose. Check the drive being used and ensure that there is enough space available for this operation.
-----------------	--

Explanation

There was a write error from the local disk used to store the virtual machine virtual disk information. Usually the write error is due to lack of disk space, lack of write permissions, or some similar problem with the local disk. The VMBACKDIR option can be used to assign a different disk location if the local drive does not have enough free space for the operation.

System action

A disk write error occurred, and the operation failed.

User response

Check the local disk for possible causes of the write error, and use the VMBACKDIR option to assign another disk if needed.

ANE4170E Can not create a Virtual Machine on VMware release '*release-version-target*' which was backed up from VMware release '*release-version-source*'.

Explanation

The Virtual Machine being created was backed up from a version of VMware which is not compatible with the target VMware release version being used for the restore.

System action

Processing stops.

User response

Restore the Virtual Machine to a VMware system which is compatible with the level from which the Virtual Machine was backed up.

ANE4174E Full VM backup of VMware Virtual Machine '*vmname*' failed with RC=*rc* mode=*full_or_incr*, target node name='*target_node_name*', data mover node name='*data_mover_node_name*'

Explanation

The Full VM backup of virtual machine failed. If the virtual machine (VM) name contains the word AGGREGATE, the statistics that are shown represent the total value of all VM guests that are backed up per data mover.

System action

The full backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4177E Full restore of VMware virtual machine '*vmname*' failed with RC=*rc*, mode='*restore_or_revert*', target node name='*target_node_name*', data mover node name='*data_mover_node_name*'

Explanation

The full restore of the virtual machine failed.

System action

The full restore of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4179I IBM Storage Protect application protection did not truncate the Microsoft SQL Server logs on VM '*VM*'.

Explanation

The SQL server logs were not truncated because the following option was specified for this virtual machine: INCLUDE.VMTSMVSS vname OPTIONS=KEEPSQLLOG

System action

The operation completes.

User response

Remove the OPTIONS=KEEPSQLLOG option to enable truncation of the SQL logs when a backup completes.

ANE4187W CPU and Memory Resource Allocation configuration settings cannot be restored when the IBM Storage Protect data mover node is connected directly to a Virtual Center managed ESX/ESXi host. These settings have been skipped.

Explanation

The VMware vStorage APIs do not support the restore of CPU and Memory Resource Allocation configuration settings when connected directly to an ESX/ESXi host that is managed by a Virtual Center.

System action

CPU and Memory Resource Allocation configuration settings are skipped. Processing continues.

User response

Virtual machine CPU and Memory Resource Allocation configuration settings will be restored when the IBM Storage Protect data mover node connects directly to a vCenter Server. Modify the VMHOST to connect the IBM Storage Protect data mover to a vCenter Server.

ANE4191E	Restore VM operation failed using 'san' transport mode. In some cases switching from SAN to network-based VM restores can be successful.
-----------------	---

Explanation

Restore VM operations that fail using SAN transport mode can often be successful over a LAN path. If a restore vm operation fails using the 'SAN' transport mode, set the client option VMVSTORTTRANSPORT to "nbd:nbdssl" and try the restore vm operation again.

System action

Restore VM operation failed using 'san' transport mode. Restore may be successful using 'nbd:nbdssl' transport modes.

User response

Restore VM operation failed using 'san' transport mode. In some cases network-based VM restores can be successful when using 'nbd' or 'nbdssl' transport modes. The VMVSTORTTRANSPORT option can be used to restrict the IBM Storage Protect client to use only the specified transport modes.

ANE4193E	vApp 'vApp name' cannot be processed because data mover 'dm node' cannot connect to the target node 'target_node'.
-----------------	---

Explanation

The operation requires that a proxy access for the data center node is granted to the data mover node.

System action

Operation is canceled for the specified vApp.

User response

Look for errors in error log and correct any problems. Run configuration wizard or configuration editor to ensure proper nodes configuration.

ANE4194E	Encryption is currently enabled, but is not supported for
-----------------	--

incremental forever backups of virtual machines (-MODE=IFFULL or -MODE=IFINCREMENTAL) .

Explanation

Client encryption of virtual machine incremental forever backups (-mode=IFFULL or -mode=IFINCREMENTAL) is not supported. In order to avoid the unintentional storage of unencrypted data on the server, the backup operation stops.

System action

The virtual machine backup stops.

User response

Remove the encryption options for this operation and run it again. You can use Secure Sockets Layer (SSL) encryption to encrypt the data over the network. If the backup data must be encrypted in IBM Storage Protect storage pools, use an alternative backup method such as full and incremental backups (-mode=FULL and -mode=INCREMENTAL), or in-guest backups.

ANE4195E	The target node for Organization VDC 'OrgVDC name' in Organization 'Org name' was not found. As a result, vApp 'vApp name' cannot be backed up.
-----------------	--

Explanation

Either the IBM Storage Protect node for the specified organization VDC was not found on the IBM Storage Protect server, or information about the Organization VDC node was not found in the Provider VDC node.

System action

Back up of the specified vApp stops. Processing continues to the next vApp.

User response

Go to the Configuration page and click 'Run the Configuration Wizard' to verify that all required IBM Storage Protect nodes are registered on the IBM Storage Protect server. If required, register a new data mover node. Make sure that the organization VDC belongs to the provider VDC that this data mover node protects.

ANE4199W	File 'file name' is not backed up as part of the system state because cluster disk 'volume name' is not accessible.
-----------------	--

Explanation

The indicated file or directory was returned by VSS as part of the backup file list of the writer. However, the cluster disk where the file is located is not accessible. The reasons for this problem can be that the cluster disk is offline or belongs to another node.

System action

The file is not backed up. Processing continues.

User response

This problem is documented in Microsoft knowledge base topic 980794 <http://support.microsoft.com/default.aspx?scid=kb;EN-US;980794>. The topic includes a hotfix. With the hotfix, you can specify a registry key that contains a list of one or more files to be excluded from VSS enumeration. IBM Storage Protect does not back up files that are not enumerated by VSS. If the volume is brought online to the node performing the system state backup, then it cannot be backed up. You must remove the volume from the registry key and restart the system before you can back up the volume. If you do not want to implement the hotfix for this problem, IBM Storage Protect continues to issue this message.

ANE4200E	The virtual machine '<i>vmname</i>' could not be backed up because the data usage of datastore '<i>datastore</i>' exceeded the datastore threshold of <i>percentused</i> percent.
-----------------	--

Explanation

The data usage of the datastore used by the virtual machine exceeds the threshold set by the **VMDATASTORETHRESHOLD** option.

System action

The virtual machine is not backed up.

User response

Reduce the data usage of the datastore or increase the threshold in the **VMDATASTORETHRESHOLD** option. Then, back up the virtual machine again.

ANE4202E	The Deployment Manager failed to install language pack: <i>language pack name</i>. The Microsoft Installer error code was <i>error code</i>.
-----------------	---

Explanation

The previous language pack has been uninstalled, and the installation of the new language pack failed.

System action

Processing continues.

User response

For more information about Windows installer error messages, go to the Microsoft Developer Network (MSDN) technical library at <http://msdn.microsoft.com/en-us/library> and search on "Windows Installer Error Messages".

Check the install log on the client computer.

ANE4204E	The Operating System of the client computer: '<i>os name</i>' is not supported by the target version: '<i>target version</i>'
-----------------	--

Explanation

The operating system level of the client computer is no longer supported by the target level.

System action

Processing stops.

User response

Check the release documentation for information on supported operating system levels.

ANE4206E	The Deployment Manager received an error while extracting from installation image: <i>image name</i>.
-----------------	--

Explanation

The installation image might be missing, corrupted, or there might be insufficient disk space on the client computer.

System action

Deployment Manager stops.

User response

Make sure that there is sufficient disk space on the client computer.

Make sure that all of the Windows self extracting client images on the client computer are valid.

ANE4207E **The Deployment Manager was unable to initiate the final connection between the server and the updated backup-archive client.**

Explanation

After the automatic client deployment, the dsmc query session command from the updated backup-archive client was not successful.

System action

The Deployment Manager process ends.

User response

Log on to the client computer and check the backup-archive client error log.

ANE4210E **The Deployment Manager failed to install package: '*client package name*'. The Microsoft Installer error code was '*system architecture*'**

Explanation

The previous client package has been uninstalled, and the installation of the new client package failed.

System action

Processing stops.

User response

Check the technote for Microsoft Installer error code description: <http://www-01.ibm.com/support/docview.wss?uid=swg21050782&rs=663>

Check the install log on the client computer.

ANE4212E **The Deployment Manager failed to restart service: *servicename***

Explanation

After the automatic client deployment, the IBM Storage Protect client services failed to start.

System action

Processing stops.

User response

Log on to the client machine and check the backup-archive client error log.

ANE4213E **Automatic restart of the client computer was required because *reason***

Explanation

The Deployment Manager determined that the deployment requires restarting the client.

Automatic restart is not enabled. The Deployment Manager process cancels the deployment.

The current client is not uninstalled or updated.

System action

Deployment Manager cancels the client deployment and stops

User response

Reschedule the client deployment.

ANE4215E **The automatic deployment path from the current client code version '*source version*' to the client package version '*target version*' is not supported.**

Explanation

None

System action

Processing stops.

User response

Refer to the Backup-Archive Client documentation in the information center.

Reschedule the client deployment with an appropriate target level.

ANE4217E **The Deployment Manager received an error while setting up the client API. The standard API function being invoked is *API setup function name*.**

Explanation

The Deployment Manager process failed when setting up the client API.

System action

Processing stops.

User response

Check the error log on the client computer.

ANE4218E	The Deployment Manager received an error while initializing the client API. The standard API function being invoked was <i>API setup function name</i>.
-----------------	--

Explanation

The Deployment Manager process failed when initializing the client API.

System action

Processing stops.

User response

Check the error log on the client computer.

ANE4219E	The Deployment Manager received an error while creating a pipe for the standard output of the child process.
-----------------	---

Explanation

The Deployment Manager failed to create a pipe for the standard output of the child process.

System action

Processing stops.

User response

Check the error log on the client computer.

ANE4220E	The Deployment Manager is unable to determine if IBM Storage Protect processes are still running.
-----------------	--

Explanation

The Deployment Manager could not determine whether all IBM Storage Protect processes were shut down successfully.

System action

Reschedule with automatic restart (autoreboot) enabled.

User response

None

ANE4221E	The architecture of the package: '<i>package architecture</i>' does not match the current client: '<i>system architecture</i>'
-----------------	---

Explanation

The setup script was unable to retrieve the matching package from the server.

System action

Processing stops.

User response

Ensure that the client packages for all architectures are available on the server.

ANE4222E	The Deployment Manager is unable to read information in file: <i>file name</i>.
-----------------	--

Explanation

Deployment Manager failed to open a file containing required system information.

System action

Processing stops.

User response

Check the error log on the client computer.

ANE4227E	The Deployment Manager failed to install package: '<i>client package name</i>'. The client computer is out of disk space. The Microsoft Installer error code was '<i>error code</i>'
-----------------	---

Explanation

The previous client package has been uninstalled, and the installation of the new client package failed because the client computer is out of disk space.

System action

Processing stops.

User response

Check the technote for Microsoft Installer error code description: <http://www-01.ibm.com/support/docview.wss?uid=swg21050782&rs=663>

Check the install log on the client computer.

ANE4228E	The Deployment Manager failed to install language pack: '<i>language pack name</i>'. The client computer is out of disk space. The Microsoft Installer error code was '<i>error code</i>'
-----------------	--

Explanation

The previous language pack has been uninstalled, and the installation of the new language pack failed because the client computer is out of disk space.

System action

Processing continues.

User response

Check the technote for Microsoft Installer error code description: <http://www-01.ibm.com/support/docview.wss?uid=swg21050782&rs=663>

Check the install log on the client computer.

ANE4229I	The client computer is required to restart to complete the new Backup-Archive client installation.
-----------------	---

Explanation

The deployment of the new backup-archive client will not be complete until the client computer is restarted. The restart is scheduled to happen immediately after all language packs are deployed.

System action

The Deployment Manager process continues. The client computer will be shut down and restarted after all language packs are deployed, or immediately if there are no language pack to install.

User response

None

ANE4230I	The client computer will be shut down and restarted immediately.
-----------------	---

Explanation

The Deployment Manager needs to restart the client computer to complete the client deployment. It is possible the other messages provide details of the deployment.

System action

The Deployment Manager process continues. The client computer will be shut down and restarted immediately after all language packs are deployed, or immediately if there are no language pack to install.

User response

None

ANE4232E	Self-extracting installation image: <i>image name</i> cannot be found.
-----------------	---

Explanation

The Deployment Manager could not find the required installation image.

System action

Processing stops. Client deployment will be cancelled.

User response

Check the server's activity log or the scheduler log on the client computer. Reschedule the client deployment.

ANE4234E	The deployment for language packs failed.
-----------------	--

Explanation

The Deployment Manager failed to install one or more language packs. It is possible the other messages provide details of the installation.

System action

The Deployment Manager process continues.

User response

Check the error log and installation on the client computer. Identify the language packs that failed to install and manually deploy them.

ANE4235I	The deployment manager cannot log events to the server.
-----------------	--

Explanation

The Deployment Manager is unable to log events to the server. It is possible the other messages provide details of the communications.

System action

The Deployment Manager process continues. Events will be logged locally on the client machine only.

User response

Check network connection and the error log on the client computer.

ANE4242E	The setup script encountered a warning or error while retrieving the client package for the <i>architecture</i> architecture. The error level is <i>error level</i> error level.
-----------------	---

Explanation

It is possible that the client package is not available on the server.

System action

Processing stops.

User response

Ensure that client packages for all architectures are available on the server. Check the backup-archive client error log for more detailed error messages.

ANE4248E	The client is already at the target level: <i>target version</i>.
-----------------	--

Explanation

Processing stopped because the automatic client deployment feature does not support the installation of a client to a workstation that is already at its target level.

System action

Your current backup-archive client is not affected.

User response

Refer to the Backup-Archive Client documentation in the information center.

Reschedule the client deployment with an appropriate target level.

ANE4251W	<i>writername</i> file '<i>filename</i>': not found.
-----------------	---

Explanation

The indicated VSS writer file or directory was returned by VSS as part of the backup file list of the writer. However, the object does not exist on the disk.

System action

Processing stops if SKIPMISSINGSYSWFILES option is set to NO. Processing continues if SKIPMISSINGSYSWFILES option is set to YES.

User response

Verify that this file can be skipped during system state backup.

ANE4252W	<i>architecture</i>, <i>schedule-name</i>, <i>domain-name</i> : The client deployment was not completed pending the restart of the client computer. The deployment manager did not restart the client computer automatically because the AUTODEPLOY option was set to NOREBOOT.
-----------------	--

Explanation

The previous client has been uninstalled, and the installation of the new client was not completed pending the restart of the client computer. The architecture of the client, schedule name, and domain name are identified at the beginning of the message text.

System action

The Deployment Manager process completes.

User response

Manually restart the client computer as soon as possible.

ANE4253E	There was not enough disk space on the client computer. Required space: <i>package space</i> bytes; available space: <i>system space</i> bytes.
-----------------	--

Explanation

The deployment manager determined there was insufficient free disk space for the client deployment.

System action

Processing stops.

User response

Free up required disk space and reschedule the client deployment.

ANE4254E	The deployment manager detected an HSM client on the workstation that it needs to deploy the Backup-Archive client to.
-----------------	---

Explanation

An attempt was made to deploy the Backup-Archive client to a workstation that already has the HSM client installed. The Backup-Archive client cannot be deployed to a workstation that has the HSM client.

System action

Processing stops.

User response

Uninstall the HSM client and reschedule the Backup-Archive client deployment.

ANE4255E	There is not enough memory for the deployment manager to create the system information object
-----------------	--

Explanation

The system information object could not be created because there is not enough available RAM to temporarily write the data into.

System action

Processing stops.

User response

Close all unneeded applications on the client workstation and reschedule the deployment.

ANE4256E	The DSMI_DIR environment variable is not defined.
-----------------	--

Explanation

The deployment manager cannot initiate a connection to the server because the DSMI_DIR environment variable is not set. This error can occur if the deployment manager is started without using the client scheduler.

System action

Processing stops.

User response

Read the available documentation to determine how to use the client scheduler to create a client deployment task.

ANE4257E	The deployment manager cannot parse information in file: <i>file name</i>.
-----------------	---

Explanation

The deployment manager could not parse or extract the required information from the specified file.

System action

Processing stops.

User response

Check the error log file on the client workstation.

ANE4258E	The deployment manager received the Windows "OpenSCManager failed" error message.
-----------------	--

Explanation

The deployment manager could not connect to the Windows service control manager to start the client scheduler. In general, this error occurs because the user who is initiating the task does not have sufficient authority.

System action

Processing stops.

User response

Ensure that the user who starts the client scheduler has administrative privileges.

ANE4259E	The client scheduler is not started as a root user.
-----------------	--

Explanation

The client scheduler requires root user privileges to upgrade the client code.

System action

Processing stops.

User response

Log in as root and start the client scheduler.

ANE4260E The installation file system is not writeable.

Explanation

The deployment manager cannot write to the installation file system.

System action

Processing stops.

User response

Check the installation file system permissions. It is possible that the current client node runs in a virtualized environment using the client code installed in a shared storage of the physical environment. Reschedule the client deployment with the client node in the physical environment.

ANE4261E The deployment manager cannot upgrade the Backup-Archive Client.

Explanation

The Backup-Archive Client cannot be upgraded because either the current location is not the default installation location or the DSM_DIR, DSMI_DIR, DSM_CONFIG and DSMI_CONFIG environment variables are defined with a relative path and not an absolute path.

System action

Processing stops.

User response

Check the installation directory of the current Backup-Archive Client. If the Backup-Archive Client is not installed in the default location, manually upgrade the Backup-Archive Client. If the DSM_DIR, DSMI_DIR, DSM_CONFIG and DSMI_CONFIG environment variables are defined with a relative path, define them with an absolute path and try the client deployment again.

ANE4262E The preview of the client installation failed.

Explanation

The deployment manager did not uninstall the current client. The client code is unchanged.

System action

Processing stops.

User response

Check the deployment manager log and trace files on the client workstation for specific issues identified during the preview. Reschedule a deployment after any issues are resolved.

ANE4263E The deployment manager failed to uninstall the backup-archive client.

Explanation

The deployment manager received an error while uninstalling the current client.

System action

Processing stops.

User response

Check the deployment manager log and trace files on the client workstation for more details on the error. You might have to manually uninstall the client.

ANE4264E The deployment manager failed to install the backup-archive client.

Explanation

The current client was uninstalled and the deployment manager received an error while installing the new client code.

System action

Processing stops.

User response

Check the deployment manager log and trace files on the client workstation for more details on the error. Manually install the new client after the issue is resolved.

ANE4265I Client deployment options are not specified in the scheduler command or from client services.

Explanation

The default client options file will be used. The deployment manager might not report the correct server and node information when reporting status.

System action

Processing continues.

User response

Avoid initiating the client deployment directly from the command-line, instead, always start the client scheduler as a Windows service.

ANE4266I	The deployment manager failed to install non-English language pack(s).
-----------------	---

Explanation

The previous packages were uninstalled, and the installation of one or more new language packs were not successful.

System action

Processing continues.

User response

Check the deployment trace file on the client workstation for specific language pack information.

ANE4267I	The deployment manager failed to install the hardware plugin package.
-----------------	--

Explanation

The previous package was uninstalled. The installation of the new hardware plugin package failed.

System action

Processing stops.

User response

Check the deployment trace file on the client workstation.

ANE4268I	The deployment manager failed to install the journal-based backup package.
-----------------	---

Explanation

The previous journal-based backup package was uninstalled. The new journal based backup package installation failed.

System action

Processing stops.

User response

Check the deployment trace file on the client workstation.

ANE4269W	The deployment manager is stopping the scheduler or the CAD processes.
-----------------	---

Explanation

Before deploying the new client, the deployment manager must stop the scheduler and CAD processes. After the deployment, the processes must be restarted.

System action

Processing continues.

User response

The client scheduler is interrupted during the deployment.

ANE4270I	The deployment manager and the new client installation packages were downloaded to directory: <i>file name</i>.
-----------------	--

Explanation

The download directory contains everything required to complete the new client deployment. Deployment log and trace files can be found in the log/ sub-directory.

System action

Processing continues.

User response

Obtain log and trace files from the download directory for problem determination. The files are found within the log/ sub-directory.

ANE4271E **The deployment package is missing one or more required installation image files.**

Explanation

The client deployment package might not have been imported correctly to the server. It is possible that the deployment package is not retrieved completely to the client computer, due to a lack of disk space.

System action

Processing stops.

User response

Ensure that client packages are available on the server and there is sufficient disk space on the client computer. Check the backup-archive client error log file for more detailed error messages.

ANE4272E **The processor type of the package: *package processor type* does not match the current client: *system processor type*.**

.

Explanation

The processor type supported by the client package that you want to deploy does not match the processor type of the workstation that you are trying to deploy the client to. It is not always possible for the deployment manager to connect to the server and report the error.

System action

Processing stops.

User response

Verify that you are using the correct client package for the processor architecture of the computer that you want to upgrade. Then restart the deployment.

ANE4273E **The deployment manager detected a journal based backup (JBB) client on the workstation where it needs to deploy the Backup-Archive Client.**

Explanation

An attempt was made to deploy the Backup-Archive Client to a workstation that already has the JBB client installed. On some platforms, the Backup-Archive

Client cannot be deployed to a workstation that has the JBB client installed.

System action

Processing stops.

User response

Uninstall the JBB client and reschedule the Backup-Archive Client deployment.

ANE4274E **The deployment manager cannot stop the scheduler or the CAD processes.**

Explanation

The deployment manager tried to shut down the Backup-Archive Client scheduler or CAD processes but the Backup-Archive Client might be busy with other tasks.

System action

Processing stops.

User response

Reschedule the Backup-Archive Client deployment.

ANE4275E **The deployment manager cannot restart the scheduler or the CAD processes.**

Explanation

Before exiting, the deployment manager could not restart the Backup-Archive Client scheduler or CAD processes. The deployment manager stopped the processes prior to the client upgrade.

System action

Processing continues.

User response

Log on to the Backup-Archive Client workstation and check the error log file. If you have set environment variables make sure they are not defined using relative path.

ANE4276E **The deployment manager cannot obtain information about the scheduler or the CAD processes.**

Explanation

The deployment manager needs process information in order to stop and restart the Backup-Archive Client scheduler or CAD processes.

System action

Processing stops.

User response

Log on to the Backup-Archive Client workstation and check the error log file and the deployment manager error log file.

ANE4277E	The target operating system version <i>target operating system</i> does not meet the minimum required version <i>minimum required version</i>
-----------------	--

Explanation

The operating system version is earlier than the version required by the automatic deployment package.

System action

The deployment is canceled.

User response

Ensure that the version being deployed is supported by the target operating system.

ANE4278E	The deployment manager cannot obtain information about the Logical Volume Snapshot Agent (LVSA).
-----------------	---

Explanation

The deployment manager needs to determine whether an LVSA is installed on the client workstation.

System action

Processing stops.

User response

Log on to the Backup-Archive Client workstation and check the error log file and the deployment manager error log file.

ANE4280E	Automatic client deployment is not allowed on the client workstation.
-----------------	--

Explanation

One or more of the running client services include AUTODEPLOY = NO in the option file.

System action

Processing stops.

User response

Change the AUTODEPLOY option on the client and reschedule the client deployment.

ANE4281E	The update manager cannot remove the TIVsmCapi package from non-global zone(s): <i>zone name</i>.
-----------------	--

Explanation

APAR IC57433 prevents the removal of the TIVsmCapi package on Solaris on a sparse-root, non-global zone if uninstalling is done from the global zone.

System action

Processing stops.

User response

Manually uninstall the IBM Storage Protect client directly from the non-global zones and reschedule the deployment.

ANE4282E	Sparse-root non-global zone(s) were found with IBM Storage Protect Backup-Archive Client that was installed from the non-global zone: <i>zone names</i>.
-----------------	---

Explanation

One or more non-global zones are sharing the /usr file system with the global zone. The IBM Storage Protect Backup-Archive Client is installed in the global zone with the -G parameter and also installed manually in the non-global zone(s). You cannot update the IBM Storage Protect Backup-Archive Client in the global zone because it will update the version of GSKit that is shared with the sparse-root non-global zones that are not part of the automatic deployment.

System action

Processing stops.

User response

Manually upgrade the Backup-Archive Client or install it from the global zone without using the -G parameter. This ensures that you have the same version between the global zone and the sparse-root non-global zones, and you can then deploy the client automatically on all such zones.

ANE4283E	There is not enough disk space on <i>path</i> to uncompress GSKit packages. Required space: <i>req_space</i> bytes; available space: <i>avail_space</i> bytes.
-----------------	---

Explanation

The deployment manager determined that there is not enough free disk space to uncompress GSKit packages.

System action

Processing stops.

User response

Free up the required amount of disk space and reschedule the automatic client deployment.

ANE4284E	The deployment is cancelled because an automatic client deployment task was scheduled for a sparse-root, non-global zone that shares the /usr file system with the global zone.
-----------------	--

Explanation

The automatic client deployment task that was attempted is not supported and will be cancelled.

System action

Processing stops.

User response

Install the Backup-Archive Client from the global zone or manually upgrade the Backup-Archive Client.

ANE4285E	The update restore operation to an existing virtual machine '<i>VmName</i>' failed. The virtual machine is not in power off state.
-----------------	---

Explanation

The update restore operation to an existing virtual machine is not supported for a running machine and will be aborted.

System action

Restore aborted.

User response

Turn off the virtual machine and re-run the update restore command.

ANE4290E	Only one virtual machine can be selected for restore.
-----------------	--

Explanation

Restoring multiple virtual machines is not allowed. Only one virtual machine can be selected for restore.

System action

No processing occurs.

User response

Select only one virtual machine for restore.

ANE4291E	Virtual Machine could not be found on VMware server.
-----------------	---

Explanation

The backup of virtual machine failed.

System action

The backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4292E	No virtual machine found.
-----------------	----------------------------------

Explanation

No virtual machine found with name or specified in domain option.

System action

Processing stopped.

User response

Specify a correct VM name or domain option.

ANE4293E **Backup of VMware vApp 'vApp name' in Organization VDC 'Org VDC name' of organization 'Org name' failed.**

Explanation

The vApp backup operation failed. This error message is a summary message and does not contain detailed information.

System action

The configuration information and VMs for the specified vApps are not backed up. Processing continues to the next vApp.

User response

Check the previous messages in the dserror.log file for more details about this vApp .

ANE4295W **The virtual machine 'vmname' was backed up using the Windows VSS system provider. You must manually revert or delete the shadow copy on the restored volumes or you may experience degraded performance and an out-of-space condition.**

Explanation

At backup time, application protection was not able to back up the VM within the 10-second VSS limit. Therefore, the Windows VSS system provider was used. If you are restoring the application, the volume will be automatically reverted. However, if you are restoring the entire VM, you must manually revert or delete the shadow copy.

System action

The virtual machine is restored, including the system provider shadow copy.

User response

Verify that the restore was successful, and the data is not corrupt. If the data is not corrupt, you can delete the shadow copy. However, if the data is corrupt, revert the shadow copy to restore data integrity. You can figure out which shadow copy to delete or revert by looking for the dsShadowCopyID.txt file in the

root directory of each restored volume. Then, use the diskshadow delete or revert command.

ANE4296I **architecture, schedule-name, domain-name: The Deployment Manager process was started successfully. Deployment Manager Version Information: version**

Explanation

The Deployment Manager process was started as a post schedule command. This is the first message from the Deployment Manager. The architecture of the client, schedule name, and domain name are identified at the beginning of the message text.

System action

Deployment Manager continues to process.

User response

None

ANE4297W **architecture, schedule-name, domain-name: Client deployment was completed with warnings:**

Explanation

This is a generic warning message. It is possible the other messages provide details of the deployment. The architecture of the client, schedule name, and domain name are identified at the beginning of the message text.

System action

The Deployment Manager process completes.

User response

Check the warning messages from the server administration center, the server activity log, or error log on the client computer for more information.

ANE4298E **architecture, schedule, new_device_type: The client deployment was cancelled. The previous event causing the cancellation is:**

Explanation

This is a generic message that the client deployment was cancelled. The Deployment Manager does not uninstall or update the current client. It is possible the other messages provide details of the deployment. The

architecture of the client, schedule name, and domain name are identified at the beginning of the message text.

System action

Processing stops.

User response

Check the warning messages from the server administration center, the server activity log, or error log on the client computer for more information.

ANE4299E	<i>architecture, schedule-name, domain-name:</i> The client deployment failed. The previous event causing the failure is: event
-----------------	--

Explanation

This is a generic message that the client deployment failed. It is possible that other messages provide details of the failure. The architecture of the client, schedule name, and domain name are identified at the beginning of the message text.

System action

Processing stops.

User response

Check the warning messages from the server administration center, the server activity log, or error log on the client computer for more information.

ANE4300I	<i>architecture, schedule-name, domain-name:</i> Client deployment was completed successfully.
-----------------	---

Explanation

The Deployment Manager process completes.

System action

Processing stops.

User response

None

ANE4301I	IBM Storage Protect detected Microsoft Active Directory Domain Controller on virtual machine 'VM'.
-----------------	---

Explanation

The virtual machine contains Microsoft Active Directory Domain Controller.

System action

IBM Storage Protect saved additional information about this virtual machine.

User response

None

ANE4302W	IBM Storage Protect failed to detect if Microsoft Active Directory Domain Controller on virtual machine 'VM'.
-----------------	--

Explanation

There was an error while checking if the virtual machine contains Microsoft Active Directory Domain Controller.

System action

IBM Storage Protect continues backing up this virtual machine.

User response

Check IBM Storage Protect error log for additional information.

ANE4303E	The vCloud Director vApp '<i>vapp-name</i>' has not been previously backed up.
-----------------	---

Explanation

The specified vCloud Director vApp has not been previously backed up, so can not be specified for restore.

System action

The specified vCloud Director vApp is skipped, and the next vApp in the restore list is processed.

User response

Verify the vCloud Director vApp name to be restored, and re-try the operation.

ANE4304I	IBM Storage Protect could not detect the IBM Storage Protect for Virtual Environments license.
-----------------	---

Active Directory Domain Controller will not be protected on VM 'VM'.

Explanation

The virtual machine contains Microsoft Active Directory Domain Controller, but a IBM Storage Protect for Virtual Environments license is not detected. The Domain Controller will not be protected.

System action

Install IBM Storage Protect for Virtual Environments 7.1 or later to protect Active Directory.

User response

None

ANE4305W	Backup of VMware vApp 'vApp name' in Organization VDC 'Org VDC name' of organization 'Org name' completed. Some VMs were not backed up. mode: 'Incremental Forever - full_or_incr' target node name: 'target_node_name' data mover node name: 'data_mover_node_name' VMs backup status: number of VM backed up out of number of VMs in vApp VMs backed up successfully.
-----------------	--

Explanation

The vApp backup operation completed successfully. However, one or more VMs for the specified vApp were not backed up. These VMs will not be created during the restore operation.

System action

Processing continues to the next vApp.

User response

Check the dserror.log file for this vApp for more information about this message. Resolve the problem, then try the operation again.

ANE4308E	Full VM backup of 'hypervisor' Virtual Machine 'vmname' failed with RC=rc mode=full_or_incr, target node name='target_node_name', data mover node name='data_mover_node_name'
-----------------	--

Explanation

The Full VM backup of virtual machine failed.

System action

The full backup of the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4311E	Full VM restore of 'hypervisor' Virtual Machine 'vmname' failed with RC=rc target node name='target_node_name', data mover node name='data_mover_node_name'
-----------------	--

Explanation

The Full VM restore of the virtual machine failed.

System action

The full restore of the the virtual machine finished with failures. The next virtual machine in the vmlist will be processed. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4313I	Rebalance Schedule sched-name Type: balance-type
-----------------	---

Explanation

A rebalance operation was requested for the named schedule. A rebalance can be complete or minimal. A Minimal rebalance is performed automatically at the end of each schedule. You can configure a complete rebalance by using the option settings, VMREBALANCESCHEDULEPERIOD and VMREBALANCESCHEDULEONLY.

System action

The rebalance operation begins.

User response

No action is required.

ANE4319E **Rebalance schedule error occurred while processing the timestamp file.**

Explanation

An error occurred while a tagged schedule was processing a local timestamp file. The timestamp file will be recreated after the next schedule is run.

System action

The schedule completed.

User response

The timestamp file name is based on the schedule name. It has the format "rebalance_timestamp_scheduledname.file" Deleting the file may help. The timestamp file will be recreated after the next schedule is run.

ANE4441E **'fs' is a 'fstype' file system, which is not a supported file system type for file backup, image backup or archive.**

Explanation

The specified file system is not supported for any type of backup. IBM Storage Protect does not support backup and archive or image backup for this type of volume.

System action

The file system is skipped. Processing continues with the next file system.

User response

Refer to the IBM Storage Protect client manual for a complete list of supported file systems.

ANE4442E **'VM-Name' a backup cannot be created because the virtual machine has assigned disk with duplicate disk identifiers.**

Explanation

The client detected that the virtual machine has assigned disk with duplicate disk identifiers. The disk may have been copied. A backup cannot be created on a virtual machine that have duplicate disk identifiers.

System action

The virtual machine is not backed up. Processing continues with the next virtual machine.

User response

Check that the virtual disks has different disk identifiers and update the virtual machine configuration to match any changes to the file system. If the problem persists, contact an administrator of the Hyper-V server.

ANE4443E **'fs' is a CSVFS file system, which is not a supported file system type for file backup, image backup or archive.**

Explanation

Microsoft Cluster Shared Volumes File Systems (CSVFS) are NTFS or ReFS volumes that are added to Cluster Shared Volumes. These volumes are intended for Hyper-V and expanded support for SQL, not for regular file data. IBM Storage Protect does not support file level backup and archive or image backup for CSVFS volumes.

System action

The file system is skipped. Processing continues with the next file system.

User response

Refer to the IBM Storage Protect client manual for a complete list of supported file systems.

ANE4446E **A file restore mount operation for hypervisor type Virtual Machine 'vmname' failed. The data center node name is 'data center node name', the mount proxy node name is 'mount proxy node name'.**

Explanation

The file restore mount operation of the virtual machine failed.

System action

The mount of the virtual machine finished with failures.

User response

Review the local client error log for the reason for the failure.

ANE4449E **A cleanup of the file restore mount of hypervisor type Virtual Machine 'vmname' failed. The data center node name is 'data center node name', the mount proxy node name is 'mount proxy node name'.**

Explanation

The cleanup of file restore mount operation of the virtual machine failed.

System action

The cleanup of mount of the virtual machine finished with failures.

User response

Review the local client error log for the reason for the failure.

ANE4450E **The mount proxy platform is not supported for file restore mount operations.**

Explanation

The file restore mount operation failed. The mount proxy platform is unsupported or the IBM Storage Protect Recovery Agent is not correctly installed and configured.

System action

The file restore mount operation failed.

User response

Ensure that the IBM Storage Protect Recovery Agent is installed and configured correctly and run the file restore mount operation from a supported mount proxy platform.

ANE4451E **The Windows iSCSI service is not available.**

Explanation

The Windows iSCSI service is not available on the mount proxy machine. It is either not started or is not installed or configured correctly.

System action

Processing stops. The file restore mount operation fails.

User response

Ensure that the iSCSI service is up and running on the mount proxy machine.

ANE4900W **Schedule 'schedule-name' has opened a new session with the server.**

Explanation

A scheduled event ends because of a connection failure. The scheduled event had to be restarted outside its normal startup window to continue the operation.

System action

The scheduled event is completed using more than one session.

User response

None required. If this is a recurrent condition, you may want to check for network problems.

ANE4901E **The following object contains one or more unmatched quotation marks and cannot be processed: 'filespace path filename'.**

Explanation

The file name in the file list contains unmatched quotes. If a line in the file list begins with a single or double quotation mark this quotation mark is considered to be an opening quotation mark. The corresponding closing quotation mark of the same type must be at the end of the line. If there is no closing quotation mark or the closing quotation mark has been encountered in the middle of the line, it is an invalid input.

System action

The object is skipped.

User response

Correct the specification of the object.

ANE4904E **The instant access operation for the 'vmname' virtual machine failed. The target node is 'target_node_name' and the data mover node is 'data_mover_node_name'.**

Explanation

The instant access operation for the virtual machine failed.

System action

Errors occurred and the instant access operation did not complete.

User response

See the client error log to determine the cause of the failure.

ANE4907E	Instant restore of VMware Virtual Machine 'vmname' failed. target node name='target_node_name', data mover node name='data_mover_node_name'
-----------------	--

Explanation

The instant restore of the virtual machine failed.

System action

The instant restore of the the virtual machine finished with failures. The reason for the failure is written to the local client error log.

User response

Check the local client error log for reason for the failure.

ANE4910E	The cleanup operation for the 'vmname' virtual machine failed. The target node is 'target_node_name' and the data mover node is 'data_mover_node_name'.
-----------------	--

Explanation

The cleanup operation for the virtual machine failed.

System action

Errors occurred and the cleanup operation did not complete.

User response

See the client error log to determine the cause of the failure.

ANE4915I	Object increased in size during compression: <i>filepathfilename</i>
-----------------	---

Explanation

The file increased in size during compression.

System action

Processing contiues.

User response

None.

ANE4917E	A failure occurred while accessing the VMware libraries. The required files for the virtual machine backup were not found. The files are installed only if the client is defined as a data mover in IBM Storage Protect for Virtual Environments.
-----------------	--

Explanation

A failure occurred while accessing the VMware libraries for the virtual machine environment.

System action

The backup operation cannot continue.

User response

Install the IBM Storage Protect for Virtual Environments package to use the client to back up virtual machines.

ANE4936E	The snapshot of virtual machine 'vmname' failed and a snapshot cannot be attempted again.
-----------------	--

Explanation

The snapshot of the virtual machine failed with a permanent error. Such as the Hyper-V writer is not responding. Another snapshot attempt will not be made.

System action

The snapshot of the virtual machine finished with an error. Processing continues to the next virtual machine.

User response

Check the Windows event log for the reason for the failure.

ANE4937I	Resending file <i>file</i> in a new transaction session to recover from the transmission error.
-----------------	--

Explanation

None.

System action

The file is resent.

User response

None.

ANE4938I	Virtual machine: '<i>vm-name</i>' disk: '<i>disk-name</i>' is excluded by size.
-----------------	--

Explanation

The option file or command given excluded the disk from backup processing.

System action

The disk is not processed.

User response

If the disk is intentionally excluded, then this message is expected behavior. Otherwise modify the command or option file to include the disk.

ANE4942E	The file specification '<i>string</i>' is invalid.
-----------------	---

Explanation

The operating system indicated that the file specification is invalid. One possible reason is that the file specification contains unrecognized characters. Another possible cause is incorrect use of quotation marks in the file specification.

System action

Processing stopped.

User response

Enter a correct file specification as described in the *Using the Backup-Archive Client* book for the particular operating system. Ensure that the file specification contains valid characters. Verify correct

use of quotation marks for specifications that contain blanks spaces. If multiple file specifications are used, make sure that any use of quotation marks does not cause the file specifications to be treated as a single file specification.

ANE4944I	Virtual machine: '<i>vm-name</i>' disk: '<i>disk-name</i>' is excluded by user.
-----------------	--

Explanation

The option file or command given excluded the disk from backup processing.

System action

The disk is not processed.

User response

If the disk is intentionally excluded, then this message is expected behavior. Otherwise modify the command or option file to include the disk.

ANE4946W	Warning: virtual machine: '<i>vm-name</i>' disk: '<i>disk-name</i>' excluded by user, was not found.
-----------------	---

Explanation

The specified virtual disk does not exist on the virtual machine.

System action

Processing continues.

User response

Use the "dsmc backup vm ..." command with the -preview option to display a listing of the disk labels which exist on the virtual machine. Since the disk was specified to be excluded from the backup, the backup will continue. However it is possible that a disk will included in the backup which was not desired, check the spelling of the disk label, and correct the disk label if an undesired disk is now included in the backup operation.

ANE4947E	Error: virtual machine: '<i>vm-name</i>' disk: '<i>disk-name</i>' included by user, was not found.
-----------------	---

Explanation

The specified virtual disk does not exist on the virtual machine.

System action

Processing stops.

User response

Use the "dsmc backup vm ..." command with the -preview option to display a listing of the disk labels which exist on the virtual machine. Check the spelling of the disk label and correct the disk label and then retry the 'backup vm' operation.

ANE4948E	A specified virtual disk was not found on the virtual machine.
-----------------	---

Explanation

You must specify a virtual disk label name which exists on the virtual machine.

System action

Processing stops.

User response

For a backup operation, use the "dsmc backup vm ..." command with the -preview option to display a listing of the disk labels which exist on the virtual machine. For a restore operation, use the "dsmc query vm ..." command with the -detail option to display a listing of the disk labels which exist on the virtual machine backup. Check the spelling of the disk label and correct the disk label and then retry the operation.

ANE4972W	File server <i>file-server-name</i> has been upgraded to Data ONTAP version '<i>version.modifcation.submodificati on</i>'. This version does not support unicode file names for snapshot difference incremental backup. Upgrade to a version that supports unicode file names as soon as possible.
-----------------	---

Explanation

The file server has been upgraded from a version that supports unicode file names for incremental backup using snapshot difference to a version that does not. If you have upgraded from Data ONTAP version 7.3.3 (or later) to 8.0, you lose the ability to back up files with unicode file names when performing snapshot difference incremental backup.

System action

Processing continues. However, files with unicode names are not backed up.

User response

Upgrade to a version that supports unicode file names as soon as possible. If you have upgraded from Data ONTAP version 7.3.3 (or later) to 8.0, upgrade to 8.1 (or later). If it is not possible to upgrade at this time, you can suppress this warning message by renaming the file space on the IBM Storage Protect server and performing a snapshot difference incremental backup.

ANE4973E	An error occurred accessing NTFS security information for file '<i>filespace namepath-namefile-name</i>'
-----------------	---

Explanation

An access denied error occurred while attempting to access NTFS security information.

System action

The object is skipped.

User response

See your system administrator or bypass the failing check by using SkipNTSecurity option.

ANE4974E	Error processing '<i>filespace namepath-namefile-name</i>': a required NT privilege is not held.
-----------------	---

Explanation

The user account running IBM Storage Protect does not possess a required NT user right/privilege for performing the current operation.

System action

The object is skipped.

User response

Your system administrator has the authority to grant the needed privilege.

ANE4987E	Error processing '<i>filespace namepath-namefile-name</i>': the object is in use by another process
-----------------	--

Explanation

The specified file is being used by another process. You tried to read from or write to a file that is currently being used by another process.

System action

File skipped.

User response

Ensure that the file is not locked by another process. If the file is not locked, retry the command.

ANE4988W	File '<i>filesystem namepath-namefile-name</i>' is currently unavailable on server and has been skipped.
-----------------	---

Explanation

You tried to restore or retrieve a file that is currently not available from the IBM Storage Protect server. This is most likely a temporary condition.

System action

IBM Storage Protect cannot restore or retrieve the file.

User response

Try to restore or retrieve the file again after the file becomes available on the server. If the problem persists, see your IBM Storage Protect administrator for assistance.

ANE4989E	Error processing '<i>filesystem namepath-namefile-name</i>': the directory is in use by another process. All objects in the directory and any of its subdirectories are skipped.
-----------------	---

Explanation

The specified directory is being used by another process. You tried to read from or write to a directory that is currently being used by another process. The objects contained in the directory and its subdirectories are not backed up.

System action

Processing stopped for that directory. If other files and directories were also specified in this backup, they are processed

User response

Ensure that you specified the correct directory name, correct the permissions, or specify a new location. If the directory name is correct, retry the backup when no process has exclusive use of the directory.

ANE4991I	<i>Application Type Application Message Id Application Message</i>
-----------------	---

Explanation

This is a message sent by the application you are currently running with IBM Storage Protect.

System action

IBM Storage Protect logs the application message.

User response

Refer to the documentation for the application that you are using.

ANE4992W	<i>Application Type Application Message Id Application Message</i>
-----------------	---

Explanation

This is a message sent by the application you are currently running with IBM Storage Protect.

System action

IBM Storage Protect logs the application message.

User response

Refer to the documentation for the application that you are using.

ANE4993E	<i>Application Type Application Message Id Application Message</i>
-----------------	---

Explanation

This is a message sent by the application you are currently running with IBM Storage Protect.

System action

IBM Storage Protect logs the application message.

User response

Refer to the documentation for the application that you are using.

ANE4994S	<i>Application Type Application Message Id Application Message</i>
-----------------	---

Explanation

This is a message sent by the application you are currently running with IBM Storage Protect.

System action

IBM Storage Protect logs the application message.

User response

Refer to the documentation for the application that you are using.

ANE4997E	Error processing '<i>filespace namepath-namefile-name</i>': file system quota reached condition - no space left.
-----------------	---

Explanation

No more files can be restored or retrieved because the quota of the destination file system has been reached.

System action

The client prompts you for action:

- Retry this object
- Skip this object
- Abort the action

User response

Select the appropriate action for this object. Create some free space or increase the quota on the destination file system before you retry the operation. Another option is to restore or retrieve the file to another file system.

ANE4998E	Link information for file '<i>filename</i>' could not be obtained: access to the object is denied.
-----------------	---

Explanation

Access to the specified file link is denied. You tried to read information for file link and you do not have access permission for this object.

System action

Processing of System State stops.

User response

Try the operation again. If the problem persists, contact IBM technical support for additional assistance.

ANE4999I	The following message was too long to log to the server: '<i>shortened message with message number</i>'
-----------------	--

Explanation

The message text and inserts are too large to send to the server in the available internal buffer.

System action

The *message number* message is written to the local client error log, then shortened and sent to the server as a part of this message. The message is reduced in length by substituting '...' in the middle of the original message.

User response

The message referred to has been shortened, but describes the error that occurred. See the documentation for that message for more information.

Chapter 3. ANR messages

ANR messages are issued by the server. Some ANR messages are common to all operating systems, and some are specific to a single operating system.

ANR messages list

Messages are listed in ascending numerical order. All elements of the message are documented.

For a list of new, changed, and deleted server messages, see the following files in the server installation directory:

Release_msg_chgs

This file contains all new, changed, and deleted messages from the previous server version to the current version.

Maint_msg_chgs

This file contains all new, changed, and deleted messages from the current server version to the current release.

These files are in the *installation_directory*\doc directory for Microsoft Windows operating systems and the *installation_directory*/server/bin/ directory for all other operating systems.

ANR Messages 00001-01000		System action	Explanation
ANR00 10W	Unable to open message catalog for language <i>language</i> . The default language message catalog will be used.	The server continues to initialize using the second locale.	The minimum memory required is 12 GB. 16 GB is required if you are using data deduplication. At least 32 GB is needed for heavily used servers. Using 32 GB or more of memory enhances performance of the IBM Storage Protect server database inventory.
		User response To resolve the issue, complete the following steps: <ul style="list-style-type: none">If you specified a LANGUAGE option in the server options file, ensure that you specified a supported locale and that the locale is installed on your system.If you specified environment variables for the system locale, ensure that you specified a supported locale and that the locale is installed on your system.Restart the server.	If you plan to run multiple instances, each instance requires the memory listed for one server. Multiply the memory for one server by the number of instances planned for the system.
ANR00 11W	Unable to set locale to <i>first locale</i> . Using locale <i>second locale</i> for message formatting.	The server continues to initialize with the default English message catalog.	Node replication processing requires additional memory. Use a minimum of 32 GB of memory for node replication without data deduplication. Node replication with data deduplication requires a minimum of 64 GB of memory. You will require an active log at least 64 GB in size to run
		User response To resolve the issue, complete the following steps: <ul style="list-style-type: none">If you specified a LANGUAGE option in the server options file,	
		Explanation The first locale could not be set.	
		ANR00 98W	This system does not meet the minimum memory requirements.

replication. If replication and deduplication are both being used, an active log at least 128 GB in size is required.

System action

Server operation continues.

User response

Increase the amount of memory on the system.

ANR00 99W This operating system is not supported.

Explanation

The system has detected one of the following items:

- a release of the operating system that is not supported
- the required maintenance for the operating system is not installed

See the software requirements section in the information center for more details.

System action

Server operation continues.

User response

See the software requirements section in the information center and upgrade to a supported operating system.

ANR01 00E *Source file(line number): Error error code creating table "table name".*

Explanation

An internal error has occurred in an attempt to create a server database table. This message always accompanies another error message and provides more detail about that error.

System action

The activity that generated this error fails.

User response

Contact your service representative.

ANR01 01E *Source file(line number): Error error code opening table "table name".*

Explanation

An internal error occurred when a server database table was being accessed. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

If the server or storage agent stops in response to a HALT command, you can ignore this error message.

ANR01 02E *Source file(line number): Error error code inserting row in table "table name".*

Explanation

An internal error occurred when data was added to a server database table. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

An error occurred when a row was inserted into a server database table. Typically, this error causes an error code value of 1202 to be displayed. An error code value of 1202 indicates that the record being inserted already exists in the database. This type of error might be caused by a timing issue with the server or a synchronization issue involving server processes, client sessions, or other server actions. Review the activity log file to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 03E *Source file(line number): Error error code updating row in table "table name".*

Explanation

An internal error occurred when data was updated in a server database table. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

An error occurred when a row was inserted into a server database table. Typically, this error causes an error code value of 1114 to be displayed. An error code value of 1114 indicates that the record being updated does not exist in the database. This type of error might be caused by a timing issue with the server or a synchronization issue involving server processes, client sessions, or other server actions. Review the activity log file to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 04E *Source file(line number): Error error code deleting row from table "table name".*

Explanation

An internal error occurred when data was being removed from a server database table. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

An error occurred when a row was deleted from a server database table. Typically, this error causes an error code value of 1114 to be displayed. An error code value of 1114 indicates that the record being deleted does not exist in the database. This type of error might be caused by a timing issue with the server or a synchronization issue involving server processes, client sessions, or other server actions. Review the activity log file to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 05E *Source file(line number): Error setting search bounds for table "table name".*

Explanation

An internal error occurred when data was being accessed from a server database table. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

Review the activity log file to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 06E *Source file(line number): Unexpected error error code fetching row in table "table name".*

Explanation

An internal error occurred when data was being accessed from a server database table. This error message always accompanies another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

Review the activity log to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 07W *Source file(line number): Transaction transaction ID was not committed due to an internal error.*

Explanation

An internal error was detected during transaction commit. This message is typically preceded by another error message which provides more details about the error.

System action

The activity that generated this error fails.

User response

Review the activity log to determine what operations were in progress and were affected by this error. Try the operation again and change the timing so that it does not run with the same processes or actions as when the error occurred.

ANR01 08E *Source file(line number): could not start a new transaction.*

Explanation

An error occurred while attempting to start a new transaction. Possibly there is not enough memory.

System action

The activity that generated this error fails.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR01 09E *Attempt number att_num Unable to load cryptography module from 'icc location'.*

Explanation

An error occurred while attempting to load the cryptography module.

System action

The application will not start.

User response

Verify that the ICC cryptography directory is located in either the application root directory or the directory specified in the platform specific environment variable (the DSMSEV_DIR for Unix platforms or the Windows registry).

ANR01 10E *An unexpected system date has been detected; the server is disabled. Verify the system date and use the*

ACCEPT DATE command to establish the current date as valid.

Explanation

The server has noted that the current system date is suspect. It is earlier than the server install date or has suddenly moved into the future by 30 days or more.

System action

The server is disabled for client, server and administrative access. Most server processes will not execute.

User response

If the current system date is not valid, reset the date. Use the ACCEPT DATE command to establish the current date as valid on the server. After executing this command, you can use the ENABLE SESSIONS ALL command to enable the server for sessions. Accepting an invalid date can cause any of the following problems:
Premature deletion of data
Excessive retention of data
Scheduling problems
Event record problems
Password expiration problems.

ANR01 Command: The BEGINNODEID and ENDNODEID are both required to be specified.

Explanation

The BEGINNODEID and ENDNODEID are both required to be specified or neither of them are required.

System action

The server fails the command.

User response

Reissue the command, specifying both BEGINNODEID and ENDNODEID, or neither of them.

ANR01 Command: The 12E specified BEGINNODEID node id is greater than the ENDNODEID node id.

Explanation

Either the BEGINNODEID or the ENDNODEID is invalid because the value of the BEGINNODEID is greater than the ENDNODEID.

System action

The server fails the command.

User response

Reissue the command, specifying the ENDNODEID to be greater than the BEGINNODEID, or both to be equal.

ANR01 Command: The 13E storage pool list specified with the parameter parameter name includes storage pool storage

pool name more than once.

Explanation

The storage pool name specified has been specified more than once. The name occurs more than once in the COPYSTGPOLLS list, more than once in the ACTIVEDATAPOOLS list, more than once in the PROTECTLOCALSTGPOLLS list, or it has been specified in multiple lists.

System action

The command fails.

User response

Reissue the command specifying unique storage pool names.

ANR01 Command: The 14E NUMBER parameter is required on this command. The current default value is 0.

Explanation

The NUMBER parameter is required for the FORMAT LFVOLUME COMMAND when the LFVOLUMEFORMATCOUNT option is set to 0.

System action

The command is not executed.

User response

Either reissue the command with the NUMBER parameter or else use the the SETOPT command to change the

LFVOLUMEFORMATCOUNT value.

ANR01 The server 15W script script name attempted to start more parallel commands than are allowed for a single script. A single script is limited to parallel command limit parallel commands.

Explanation

The server waits for all previous parallel commands started by the script to complete. When all previous parallel commands are complete, the server allows the script to continue. The script can attempt to start more parallel commands.

System action

The server waits for all previous parallel commands before allowing the script to continue.

User response

If you need to start more parallel commands than the script limit allows, modify the script to invoke multiple scripts in parallel, each of which can start multiple parallel commands, up to the script limit.

ANR01 The server 16W script script name attempted to start more parallel commands than are allowed for

the server. The server is limited to *parallel command limit* parallel commands.

Explanation

The server waits for all previous parallel commands started by the script to complete. When all previous parallel commands are complete, the server allows the script to continue. The script can attempt to start more parallel commands. If the limit is exceeded, the command will run serially.

System action

The server waits for all previous parallel commands before allowing the script to continue.

User response

Reduce the number of parallel commands or scripts that are running on the server at any one time.

ANR01 17E The server contains stored data. Archive data retention protection cannot be changed.

Explanation

The archive data retention protection state cannot be changed while the server contains any backup, archive, or space-managed data.

System action

Processing continues.

User response

In order to change the archive data retention protection state, the server must contain no backup, archive, or space-managed data. Either re-initialize the server database, or delete all stored data and try the command again.

ANR01 18W The client option *client option* is not valid and will not be sent to the client. Use the **INCLEXCL** option instead.

Explanation

The client options **INCLUDE** and **EXCLUDE** are not valid and have been replaced by the combined **INCLEXCL**. If **INCLUDE** and **EXCLUDE** are used in client option sets, use the **INCLEXCL** option along with the specific include or exclude option that you want the clients to use.

System action

The option is ignored and is not sent to the client. The server continues processing.

User response

Client options **INCLUDE** and **EXCLUDE** are not valid; use the **INCLEXCL** option along with the specific include or exclude option that you want the clients to use.

ANR01 19W The client option *client option* is not valid and will not be sent to the client. Delete it from client option sets.

Explanation

The client option is not supported by this server and should be deleted from the client option set.

System action

The option is ignored and is not sent to the client. The server continues processing.

User response

Delete the option from the option set. Check the documentation for a possible replacement for the option.

ANR01 20I Archive data retention protection is set to *state of archive data retention protection*.

Explanation

The archive data retention protection state has been set.

System action

Processing continues.

User response

None.

ANR01 21E *command* is not allowed when archive data retention is enabled.

Explanation

The specified command is not allowed when archive data retention protection is enabled on the server.

System action

Processing continues.

User response

None.

ANR01 22E *command: A* node cannot be assigned to a new domain when archive data retention is enabled.

Explanation

A previously defined node cannot be assigned to a new domain when archive data retention protection is enabled on the server.

System action

Processing continues.

User response

None.

ANR01 23E *command: A* device type of **SERVER** is not allowed when archive data retention is enabled.

Explanation

The specified device type is not allowed when archive data retention protection is enabled on the server.

System action

Processing continues.

User response

None.

**ANR01 Object object
24W name (object id
hi) for node
node name
(node id),
filesystem
filesystem name
(filesystem id) is
retention
protected and
can not be
deleted.**

Explanation

The specified object can not be deleted because:

- Archive retention protection is enabled and the object's retention period has not elapsed, or
- The object is part of a deletion hold.

System action

Server operation continues.

User response

None.

**ANR01 DELETE
25W FILESPACE
filesystem name
for node node
name contains
retention
protected data
and cannot be
deleted.**

Explanation

The specified file space cannot be deleted because it contains one or more objects that must be retained for one of the following reasons:

- Archive retention protection is enabled

and the object's retention period has not elapsed.

- The object is part of a deletion hold.

System action

The file space is not deleted.

User response

None.

**ANR01 DELETE
26W VOLUME:
Volume volume
name contains
retention
protected data
and can not be
deleted.**

Explanation

The specified volume cannot be deleted because it contains one or more objects that must be retained because of one of the following:

- Archive retention protection is enabled and the object's retention period has not elapsed.
- The object is part of a deletion hold.

System action

Processing continues.

User response

None.

**ANR01 command to
27E another server
is not allowed
when data
retention
protection is
enabled on the
target server.**

Explanation

The specified command is not allowed when data retention protection is enabled on the target server.

System action

Processing continues.

User response

None.

**ANR01 Command: The
28E list of storage
pools specified
with the
parameter
parameter name
includes storage
pool storage
pool name,
which is already
in use by
another storage
pool.**

Explanation

The specified storage pool name is already being used to protect another storage pool. You cannot protect multiple storage pools using the same container-copy storage pool.

System action

The command fails.

User response

Reissue the command specifying unique storage pool names.

**ANR01 Database
29I upgrade
completed
successfully.**

Explanation

The requested database upgrade operation completed successfully.

System action

Processing continues.

User response

None.

**ANR01 Diagnostic(ID):
30E Server LOG
space
exhausted.**

Explanation

There is no space to write data to the server recovery log.

System action

The activity that generated this error fails.

User response

To increase the amount of log space available to the server, evaluate the directories and filesystem assigned to the ACTIVELOGDIR, ARCHIVELOGDIR, and ARCHFAILOVERLOGDIR. An out of log space condition may occur because the ACTIVELOGDIR location is full. Alternatively, an out of log condition may occur if the log files in the ACTIVELOGDIR which are no longer active can not be archived to the ARCHIVELOGDIR and ARCHFAILOVERLOGDIR locations. If necessary, a larger ARCHIVELOGDIR or ARCHFAILOVERLOGDIR can be specified by updating this option in

the dmserv.opt file and then restarting the server.

ANR01 Diagnostic(ID):
31E Server DB space exhausted.

Explanation

There is no space to write data to the server database.

System action

The activity that generated this error fails.

User response

To increase the amount of database space available to the server, an authorized administrator can add database volumes by using the DEFINE DBSPACE command. Once additional space has been added for the database, the server database manager will automatically extend into that space and use it.

ANR01 Diagnostic(ID):
32E Memory allocation failed: object object name, size size.

Explanation

The server cannot obtain enough memory to create the object named.

System action

The activity that generated this error fails.

User response

See the documentation for the operating system about how to

increase memory for an application.

ANR01 Error loading module modname: error string

Explanation

The error specified by *error string* occurred when the server attempted to load module *modname*

System action

Server operation continues, but the function provided by the module is not available.

User response

Refer to the error string and correct the condition causing the load to fail.

ANR01 Tiering process process ID for storage rule stgrule_name started from storage pool source_stgpool to tgt_stgpool_type storage pool target_stgpool.

Explanation

The server started the tiering process to move client data that meets the specified criteria for age and state. The data can include backup, archive, and space-managed files. The tiering process was started as process number *process ID*.

System action

Server operation continues. The tiering

process can be canceled, if necessary.

User response

No action is required. However, you can query the process by using the QUERY PROCESS command. You can cancel the process by using the CANCEL PROCESS command.

ANR01 Tiering process process ID from storage pool source_stgpool started searching for eligible file spaces.

Explanation

The tiering process began a search for file spaces with eligible data that must be moved to the target storage pool.

System action

Server operation continues.

User response

No action is required.

ANR01 Table updating statistics performed successfully for processed tables of total tables.

Explanation

The server periodically performs maintenance on the database tables. The maintenance processing allows the database to update statistics determine how to best access a given table. The maintenance processing

will periodically process all tables for the server.

System action

Server operation continues.

User response

No user action required.

ANR01 Source file(line number): Error error code allocating num rows database rows.

Explanation

An internal error has occurred in an attempt to allocate storage for the requested number of database rows indicated.

System action

The activity that generated this error fails.

User response

Contact your service representative.

ANR01 Value primary logs for number of primary logs is invalid.

Explanation

The command has been issued with an invalid number of primary logs.

System action

Server installation stops.

User response

Reissue the command with a valid number of primary logs.

ANR01 39I Tiering process *process ID* identified *number of files* files for node *node name*, file space *filespace name* to tier from storage pool *source_stgpool* to storage pool *target_stgpool*.

Explanation

The actual number of files to be tiered can vary, depending on the tiering action type and the method of data storage.

System action

Server operation continues as the files are moved.

User response

No action is required. However, to learn more about the tiering process, go to the product documentation and search for "tiering."

ANR01 40I *Command:* success. Node *node_id_1* is granted proxy authority to node *node_id_2*.

Explanation

The command was successful.

System action

The server performs the command.

User response

None.

ANR01 41E *Command:* failed. Node *node_id_1* was not granted proxynode authority to node *node_id_2*.

Explanation

The command fails if either of the nodes do not exist, or if the administrator issuing the command does not have sufficient authority.

System action

The server fails the command.

User response

Verify that both nodes exist and that the administrator has sufficient authority, then issue the command again.

ANR01 42I *Command:* success. Proxynode authority for node *node_id_1* has been revoked from node *node_id_2*.

Explanation

The command was successful.

System action

The server performs the command.

User response

None.

ANR01 43E *Command:* failed. Proxynode authority for node *node_id_1* has not been

revoked to node *node_id_2*.

Explanation

The command fails if the administrator issuing the command does not have sufficient authority.

System action

The server fails the command.

User response

Check the help for the command and verify that the administrator has either system or unrestricted policy authority; then issue the command again.

ANR01 44E *Command:* failed. Node *node_id_1* was not granted proxynode authority to node *node_id_2* because node *node_id_missing* has not been defined to the server.

Explanation

The command failed because one of the nodes has not been defined to the server.

System action

The server fails the command.

User response

Verify that both nodes have been defined to the server and then issue the command again.

ANR01 45E *Command:* failed. Node

node_id_1 already has been granted proxynode authority to node *node_id_2*.

Explanation

The command failed because a proxy relationship between the two nodes already exists.

System action

The server fails the command, but does not change the existing association.

User response

None.

ANR01 46E *Command:* failed. Node *node_id_1* was not granted proxynode authority to itself.

Explanation

The command failed because a node cannot have a proxy relationship defined to itself.

System action

The server fails the command.

User response

None.

ANR01 47E *Command:* failed. Proxy node authority for node *node_id_1* to node *node_id_2* was not revoked because node *node_id_missing* has not been

defined to the server.	System action The server will fail the command.	• The server instance password was changed.	User response None.
Explanation The command failed because one of the nodes has not been defined to the server.	User response Retry the command.	System action Server initialization stops.	ANR01 Database 53I manager already running.
System action The server fails the command.	ANR01 Failed to open 50E object object_name. There was an error decrypting the password_type password.	User response For more information about the failure, try to start the database manager by issuing the db2start command, as in this example: C:\Users\admin>db2start . You might receive messages similar to the following ones: SQL1397N The Db2 service failed to logon. SQL1032N No start database manager command was issued. SQLSTATE=57019. To determine the cause of the failure, evaluate recent changes to the server and review the system error logs. Information can be found in the Db2 diagnostic log file. If you are starting a Db2 server on a Windows platform, you can set the logon account for a Db2 service by using the Services dialog box from the Control Panel.	Explanation The server database manager is already running.
User response Verify that both nodes have been defined to the server, and then issue the command again.	Explanation The server could not open the object specified due to the error encountered while decrypting the password.		System action The server continues startup.
ANR01 Command: No 48I proxy relationships were found.	System action The server will fail the related command or action.		User response None.
Explanation No proxy relationships were found.	User response Reset the password using the appropriate UPDATE command and retry the failing command or action.		ANR01 Command: The 54E active data pool list that you specified with the ACTIVEDESTINATION parameter includes active data pool active data pool name that is a duplicate. All names must be unique.
System action None.	ANR01 Database 51W manager fails to start. For more information about the failure, issue the db2start command.	ANR01 Database 52I manager successfully started.	Explanation You may enter up to 10 unique active data pool names specified with the ACTIVEDESTINATION parameter.
User response None.		Explanation The server was successfully able to start the database manager.	System action The command fails.
ANR01 Filespace 49E filesystem for node node_name was deleted concurrently with the command.	Explanation The server was unable to start the database manager. The following are possible causes: • The database manager license key is invalid or missing.	System action The server operations continue.	User response Reissue the command specifying unique active-data pool names.
Explanation The command failed. The requested filesystem was deleted concurrently with the command.			ANR01 Command: The 55E number of

active data pool names specified with the ACTIVEDESTINATION parameter cannot exceed 10.

Explanation

The maximum number of active data pool names that you can specify with the ACTIVEDESTINATION parameter is 10. You may enter up to 10 unique names, separated by commas.

System action

The command fails.

User response

Reissue the command specifying up to 10 unique active-data pool names separated only by commas.

ANR01 56E Command: The pool active data pool name with pool ID pool ID is not an active pool.

Explanation

The storage pool specified is not an active-data pool. Only active-data pools are allowed to be specified in the ACTIVEDESTINATION parameter.

System action

The command fails.

User response

Reissue the command specifying ten or fewer active-data pool names.

ANR01 57W Database operation table operation for table table name failed with result code op code and tracking ID: id.

Explanation

An error occurred during the specified *table operation* for the table indicated.

System action

The activity that generated this error fails.

User response

If there were no operational failures as a result of issue, then this was anticipated and the server was able to continue appropriately. If this resulted in a failure for a client session or server process, this information is needed to help diagnose the issue. In the even of a failure, please contact your IBM service representative for further assistance.

ANR01 58W Database operation table operation for table table name failed with operation code op code and tracking id tracking number. The data for column column number is: column data.

Explanation

An error occurred during the specified *table*

operation for the table indicated.

System action

The activity that generated this error fails.

User response

If there were no operational failures as a result of issue, then this was anticipated and the server was able to continue appropriately. If this resulted in a failure for a client session or server process, this information is needed to help diagnose the issue. In the even of a failure, please contact your IBM service representative for further assistance.

ANR01 59E Diagnostic(ID): Database deadlock detected on Db2 Statement Handle.

Explanation

The database server detected a deadlock situation and rolled back the outstanding work on this statement handle. When server processes encounter a database deadlock, they usually reattempt the work that was in progress when the deadlock was encountered. Not all processes can explicitly try an operation again. For example, migration and reclamation will eventually be tried again. However, something such as a delete volume run in a macro will only be tried again if the delete command is reissued

either in the macro or the command line.

System action

The work being done on the statement handle is rolled back. Some processes will attempt to retry the request. Others will just stop. Server operation continues.

User response

If a process can retry (like migration), then monitor the re-try attempt to see if it succeeds or not. If the process or command is not able to retry on it's own, then reissue the command or macro that caused the action to occur.

ANR01 60I Displaying segment segment number of total segments for client object object identifier with text: object name.

Explanation

Display a client object, such as a file or directory, that uses a long fully qualified name. The name is displayed in smaller segments until the entire name is shown. The segment numbers are incremented from 1 to N until all the segments for this object name are displayed.

System action

The fully qualified name for this object is displayed.

User response

None.

ANR01 61I Displaying segment *segment number* for message insert *insert identifier* with text *segment text*.

Explanation

Display a segment of a message insert that was too long to be displayed within the specified message. There may be one or more segments displayed for a given message insert.

System action

The entire message insert segment is displayed.

User response

None.

ANR01 62W Supplemental database diagnostic information: *dbReturnCode:dbState:dbCode (dbErrorMessage)*).

Explanation

The *dbReturnCode*, *dbState*, and *dbCode* are displayed as supplemental information. This information should be used in conjunction with any other database error or warning messages issues to assist with diagnosing a given issue.

System action

The activity that generated this error fails.

User response

None. This is supplemental information corresponding to another database error or warning message issued.

ANR01 63E *Diagnostic(ID): Database insufficient memory detected on Db2 Statement Handle.*

Explanation

The database server detected an insufficient memory condition and rolled back the outstanding work on this statement handle.

System action

The work being done on the statement handle is rolled back. Server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR01 65I Inventory file expiration started processing for node *nodename*, *filespace filespace name*, *copygroup copygroup* and *object type type*.

Explanation

Inventory file expiration processing started processing for the *node name* and *filespace name* indicated. For this *node name* and *filespace name* the indicated copygroup and object types are currently being evaluated.

System action

Inventory file expiration continues.

User response

This message is for informational purposes only and is only displayed if the expiration processing is executed with QUIET=NO.

ANR01 66I The inventory expiration process is completed for node *nodename*, file space *filespace name*, copy group *copygroup*, and object type *type* with the following results: examined *examined*, retained *retained*, deleted *deleted*, retried *retried*, failed *failed*, and skipped *skipped* objects. *retention bitfile deleted* retention bitfiles were deleted from retention pools.

Explanation

Inventory expiration processing is completed for node *node name* and file space *filespace name*. For this node and file space, the indicated copy group and object types were evaluated. The processing statistics show the number of objects that were examined, deleted, retried, and skipped. The statistics also show the number of objects for which processing failed and the number of retention bitfiles that were deleted from retention pools.

System action

Inventory file expiration continues.

User response

No action is required. This message is informational and displayed only if the expiration processing is executed with the QUIET=NO parameter setting.

ANR01 67I Inventory file expiration process *process ID* processed for *minutes* minutes.

Explanation

Server expiration processing ran for the indicated number of minutes.

System action

None.

User response

None.

ANR01 68I Analyst authority for administrator *admin name* will be ignored. Analyst authority is not supported on this server.

Explanation

Analyst authority is not supported for servers at V6.1 or later.

System action

The operation continues.

User response

None.

ANR01 69E An unexpected error has occurred and the IBM Storage Protect server is stopping.

Explanation

The IBM Storage Protect server encountered an error from which it cannot recover, and the server is halting. Other messages will be issued along with this message indicating the specific error conditions which have occurred.

System action

The server halts.

User response

Follow the instructions indicated in any associated messages, then start the server.

ANR01 70E *Diagnostic(ID):* Error detected on Db2 Statement Handle, database restart required.

Explanation

The IBM Storage Protect server encountered an error on the database and needs to issue a Db2 RESTART DB to the database manager. All connections to the database server are severed, and uncompleted operations are aborted. The IBM Storage Protect server will then restart the database and attempt to continue. If the database manager cannot be restarted, the IBM Storage Protect server will halt. Other messages may be issued along with this message indicating the specific error conditions which have occurred.

System action

The server continues, or if it cannot restart the database, it halts.

User response

If the server is able to recover, no action is needed, except to restart operations that were aborted. However, if the server cannot recover, it will halt. Follow the instructions indicated in any associated messages, then start the server. If the server still cannot be started, manually issue the Db2 RESTART DB command, then attempt

to start the IBM Storage Protect server again.

ANR01 71I *Diagnostic(ID):* Error detected on Db2 Statement Handle, database in evaluation mode.

Explanation

The IBM Storage Protect server encountered an error on the database and will take action to determine the type of error and whether or not it can recover from the error.

System action

Server processing continues.

User response

This is an information message. As the IBM Storage Protect server attempts to resolve the error, it might issue other messages. Follow the instructions indicated in any associated messages.

ANR01 72I *Diagnostic(ID):* Error encountered performing action *action*.

Explanation

The IBM Storage Protect server encountered an error performing the specified database action. This error caused the action to fail and prevented the server from being able to continue.

System action

Server processing terminates, the requested action fails.

User response

Review other messages issued to determine the actual error and then take steps to remedy that failure before retrying the operation.

ANR01 73I The database failed action because of insufficient system memory available.

Explanation

The IBM Storage Protect server encountered an error while performing the specified action. Specifically, the server database did not have sufficient memory to communicate with the server database or was unable to acquire the memory needed for the server buffer pools.

System action

Server processing terminates, the requested action fails.

User response

In most cases, this indicates a lack of available resources on the system. This may be a lack of physical resources or it may be an environment setting that prevents the server from having access to the needed resources. For instance, on Linux systems, this may be caused by the SHMMAX

value (maximum allowed shared memory) being set too low. On Linux, this can be viewed using the command "ipcs -l". Similarly, for Linux, this value can be increased using the command "sysctl -w kernel.shmmax=nnn" where nnn is the new maximum memory value to assign to be used for shared memory. As a general recommendation, this value should be set to approximately 1.25 GB or higher depending upon the actual physical memory (RAM) available on that system.

ANR01 Diagnostic(ID): 74E Maximum Db2 connections reached on DB2 Handle.

Explanation

There are no more available connections to the server database.

System action

The activity that generated this error fails.

User response

To increase the number of database connections available to the server, the Db2 administrator can modify the IDBACK parameter in the DSNZPARM settings.

ANR01 Diagnostic(ID): 75E Space exhausted for one or more of the following: DB, LOG, or instance directory.

Explanation

The space assigned to the server database, the recovery log, or instance directory has been exhausted.

System action

The server terminates.

User response

Review the filesystems or other space assigned to the server for the database, recovery log or instance directory. If the space assigned to the database is full, restart the server and add additional database space using the EXTEND DBSPACE command or use the DSMSEV EXTEND DBSPACE utility. If the server ACTIVELOGDIR is full, update this server option to a new location that has space available for the server to use for logging changes to the database. If the server instance directory is full, remove unneeded files or else extend this filesystem.

Please note that the server should be configured with the database, activelog, and archivelogs using different directories and storage devices. For example, if the database and activelog are configured to use the same directory and underlying storage device, this may adversely impact performance. This may also compromise the server's ability to manage the database and active

log space effectively. Similarly, the server's instance directory should also be monitored and managed with some amount of space available. The server instance directory is used to record and log some server and database actions.

ANR01 85E The data in primary storage pool name can not be copied to active data pool name. The active-data pool is not defined to a domain.

System action

The command fails.

User response

Define the active-data pool to a domain using the ACTIVEDESTINATION parameter on either the DEFINE DOMAIN or UPDATE DOMAIN command.

ANR01 86E There is insufficient authority to start the database manager.

Explanation

If the server is starting, then the user ID under which the dsmserv process is running does not have authority to start the database manager. If the server is running, it does not have sufficient authority to perform the server operations.

System action

The server process ends, and the server stops if it is running.

User response

Ensure that the user ID under which the server is running is authorized to start the database manager. Take the following actions:

- Log in to the user ID for your IBM Storage Protect instance and start the server.
 - To run the server using the root user ID on a UNIX system, add the root user ID to the primary group of the IBM Storage Protect instance user ID.
 - Or, to run the server using the instance user ID on a UNIX system, when using the automatic start, specify the -u option when you start the server.

ANR01 Database db 87E name was not found.

Explanation

The server attempted to open the database, but it was not found by the database manager. If this occurs immediately after formatting a new database, it could mean the format operation failed.

System action

The server process ends.

User response

Ensure that you format the database before starting it the first time. Ensure that all database and log directories are online and available.

ANR01 88E Fail to start the database manager. Database manager license not found

Explanation

Could not find database manager license.

System action

The server process ends.

User response

Contact your service representative.

ANR01 89E Fail to start the database manager. Database manager license has expired

Explanation

Database manager license has expired.

System action

The server process ends.

User response

Contact your service representative.

ANR01 90I Inventory file expiration started processing node *node name* for backup sets.

Explanation

Expiration processing is currently evaluating information for backup sets for the node specified.

System action

Inventory file expiration continues.

User response

This message is for informational purposes only and is only displayed if the expiration processing is invoked with QUIET=NO.

ANR01 91I Inventory file expiration finished processing node *node name* for backup sets with processing statistics: examined *examined*, deleted *deleted*, retrying *retrying*, and failed *failed*.

Explanation

Expiration processing has finished processing backup sets for the node specified. The ending statistics show the number of objects examined, deleted, and those that failed to be processed.

System action

Inventory file expiration continues.

User response

This message is for informational purposes

only and is only displayed if the expiration processing is invoked with QUIET=NO.

ANR01 93E The REPAIR EXPIRATION TYPE=*type* command cannot be issued from the server console.

Explanation

The specified REPAIR EXPIRATION command was issued from the server console. This command cannot be issued from the server console because the administrator must be prompted to continue processing the command.

System action

The server ignores the command and continues processing.

User response

Issue the command from an administrative client.

ANR01 95W Attempting to remove extraneous database entries for volume *volume name*.

Explanation

The server is attempting to remove extraneous database entries for the specified volume.

System action

IBM Storage Protect will attempt to remove the extraneous database entries for this volume.

User response

Review the completion messages for this volume to determine if the removal of the extraneous database entries was successful or if an error was encountered.

ANR01 96I Removal of extraneous database entries for volume *volume name* was successful.

Explanation

The server successfully removed extraneous database entries for the specified volume.

System action

System operation continues and future operations on the specified volume should work normally.

User response

The server successfully repaired the specified volume.

ANR01 97E Removal of extraneous database entries for volume *volume name* failed due to contention with other server processes or activities.

Explanation

The server was not able to remove extraneous database entries for the specified volume. This was due to contention

with another server process or activity.

System action

System operation continues and this volume still has extraneous database entries.

User response

It is possible that future server activities or processes will select this volume and attempt to repair it. If this occurs and the future attempt is successful, no further action is needed. The server administrator should review the activity log for the time that the repair was attempted and try to determine what caused the contention. If you are unable to determine the cause of the contention of the problem persists, please contact your service representative for additional assistance.

**ANR01 Removal of
98E extraneous
database
entries for
volume volume
name failed.**

Explanation

The server was not able to remove extraneous database entries for the specified volume.

System action

System operation continues and this volume still has extraneous database entries.

User response

The server administrator should review the activity log for the time that the repair was attempted and try to determine the cause of the failure. If you are unable to determine the cause of the contention of the problem persists, please contact your service representative for additional assistance.

**ANR01 Not possible to
99W repair volume
volume name
due to other
database
references to
this volume.**

Explanation

The server was not able to remove extraneous database entries for the specified volume because other database references to this volume exist.

System action

System operation continues.

User response

The volume repair operation for this volume is not able to take any action because other unexpected database references to this volume exists. For additional assistance contact your IBM service representative.

**ANR02 PROTECT
00E STGPOOL
process process
ID failed due to
insufficient
space in**

**destination
storage pool.**

Explanation

The destination stgpool had insufficient space.

System action

The indicated process ends.

User response

Make more space available in the storage pool and restart the operation.

**ANR02 The access
01I mode for
storage pool
directory
Directory Name
in storage pool
Pool Name was
changed to
Access Mode.**

Explanation

The access mode is changed for the specified storage pool directory.

System action

Client nodes and server processes cannot access the storage pool.

User response

To change the access mode, issue the UPDATE STGPOOLDIR command.

**ANR02 The parameter
02I name has been
set but the
changes will not
be effective
until the next
start**

Explanation

The Database configuration has been updated but has not taken effect. This setting will take effect on next server start.

System action

This server parameter does not take effect until next start. The server continues processing.

User response

None.

**ANR02 MOVE
03E CONTAINER
process process
ID terminated
for container
name -
insufficient
space in
directory
directory name.**

Explanation

During MOVE CONTAINER processing, the server could not allocate sufficient space in the storage pool directory for the container.

System action

Server processing continues.

User response

Make more space available in the storage pool, and re-issue the MOVE CONTAINER command.

**ANR02 The container
04I state for
container name
is updated from
previous state to
current state.**

Explanation

The server updates the container state.

System action

Server processing continues.

User response

Review the other messages issued to determine if further action is required.

ANR02 05W *Command name skipped data extent ID Chunk ID because it is marked damaged.*

Explanation

During command processing, the server skipped a chunk that was marked damaged.

System action

Server processing continues.

User response

None.

ANR02 06E *Command name process process ID failed due to insufficient space in destination storage pool.*

Explanation

The indicated process failed because the destination storage pool has insufficient space.

System action

The indicated process ends.

User response

Make more space available in the storage pool and reissue the command.

ANR02 07W *Command name skipped object ID Object ID because one or more extents are marked damaged.*

Explanation

During command processing, the server skipped an object because a data extent (chunk) was marked damaged.

System action

Server processing continues.

User response

None.

ANR02 08I *Tiering process process ID identified a total of number of files files and number of bytes bytes to move from storage pool source_stgpool to storage pool target_stgpool.*

Explanation

The tiering process finished searching for older files that must be moved to the target storage pool.

System action

Server operation continues as the files are moved.

User response

No action is required.

ANR02 09W *Tiering process process ID stopped - the target storage pool has insufficient space.*

Explanation

The server cannot tier the data because either the target storage pool has insufficient space to store the data or the access for the storage pool is unavailable or read-only.

System action

The process of tiering the data from the local storage pool to a target storage pool is stopped.

User response

Make more space available in the target storage pool, or specify a storage pool with more space, and reissue the START STGRULE command.

ANR02 10W *DELETE FILESPACE filesystem name for node node name contains objects belonging to a retention set and cannot be deleted.*

Explanation

The specified file space cannot be deleted because it contains one or more objects that belong to a retention set.

System action

The file space is not deleted.

User response

None.

ANR02 11W *The shredding process was unable to shred a deleted file.*

Explanation

The shredding process encountered an error that prevents a file from being shredded. See previous error messages for more details.

System action

The file is not shredded. The next time the shredding process runs, it will attempt to shred the file again.

User response

If there are files that can not be shredded due to integrity or corruption errors or unrecoverable I/O errors, run the following commands:

1. Set for manual shredding, if not already done: SETOPT SHREDDING MANUAL
2. Run manual shredding with IOERROR parameter: SHRED DATA IOERROR=SHREDSUCCESS
3. Reset for automatic shredding, if desired: SETOPT SHREDDING AUTOMATIC

If an entire disk volume has failed and all files on it are no

longer accessible, run the following commands:	matching jobs were found.	eligible file spaces.	identified a total of <i>number of files</i> files and <i>number of bytes</i> bytes to copy from storage pool <i>source stgpool</i> to storage pool <i>target stgpool</i> .
<ol style="list-style-type: none"> 1. Set the volume access to destroyed: UPDATE VOLUME volname ACCESS=DESTROYED 2. Delete the volume and the data: DELETE VOLUME volname DISCARDATA=YES 3. Set for manual shredding, if not already done: SETOPT SHREDDING MANUAL 4. Run manual shredding with IOERROR parameter: SHRED DATA IOERROR=SHREDSUCCESS 5. Reset for automatic shredding, if desired: SETOPT SHREDDING AUTOMATIC 	<p>System action</p> <p>The server continues.</p> <p>User response</p> <p>None.</p>	<p>Explanation</p> <p>The copying process began a search for file spaces with eligible data that must be copied to the target storage pool.</p>	
<hr/> <p>ANR02 Unable to read disk definition file file specification.</p>	<hr/> <p>ANR02 Copying process 14I <i>process ID for storage rule stgrule name started from storage pool source stgpool to target stgpool type storage pool target stgpool.</i></p> <p>Explanation</p> <p>The server started processing to copy client backup, archive, and space-managed file copies. The copying process was started as process number <i>process ID</i>.</p>	<p>System action</p> <p>Server operation continues.</p> <p>User response</p> <p>No action is required.</p>	<p>Explanation</p> <p>The copying process finished searching for older files that must be copied to the target storage pool.</p>
	<hr/> <p>ANR02 Copying process 16I <i>process ID identified number of files files for node node name, file space filespace name to copy from storage pool source stgpool to storage pool target stgpool.</i></p>	<hr/> <p>ANR02 Copying process 16I <i>process ID identified number of files files for node node name, file space filespace name to copy from storage pool source stgpool to storage pool target stgpool.</i></p>	<p>System action</p> <p>Server operation continues as the files are copied.</p> <p>User response</p> <p>No action is required.</p>
<p>Explanation</p> <p>At startup, the server cannot read the indicated file in order to obtain a list of disk volumes to mount.</p>	<p>System action</p> <p>Server operation continues. The copying process can be cancelled, if necessary.</p>	<p>Explanation</p> <p>The actual number of files to be copied can vary, depending on the copying action type and the method of data storage.</p>	<hr/> <p>ANR02 Copying process 18W <i>process ID stopped - the target storage pool has insufficient space.</i></p>
<p>System action</p> <p>Server initialization fails.</p>	<p>User response</p> <p>No action is required. However, you can query the process by using the QUERY PROCESS command. You can cancel the process by using the CANCEL PROCESS command.</p>	<p>System action</p> <p>Server operation continues as the files are copied.</p>	<p>Explanation</p> <p>The server cannot copy the data because either the target storage pool has insufficient space to store the data or the access for the storage pool is unavailable or read-only.</p>
<p>User response</p> <p>Use a text editor to recreate the file; it should contain one line with the name of a single log or database volume. Then restart the server.</p>	<hr/> <p>ANR02 Copying process 15I <i>process ID from storage pool source stgpool started searching for</i></p>	<hr/> <p>ANR02 Copying process 17I <i>process ID</i></p>	<p>System action</p> <p>The process of copying the data from the local storage pool to a target storage pool is stopped.</p>
<hr/> <p>ANR02 Command: No jobs found.</p> <p>Explanation</p> <p>A QUERY JOB command specified, and no</p>			

User response

Make more space available in the target storage pool, or specify a storage pool with more space, and reissue the START STGRULE command.

ANR02 19W Copying process *process ID* terminated for storage pool *storage pool name* - duration exceeded.

Explanation

During a storage pool copying action for the indicated storage pool, a process performing the copying has been terminated because the process duration has exceeded.

System action

The copying process is terminated.

User response

None.

ANR02 20I Copying process *process ID* for storage pool *storage pool name* has completed.

Explanation

The process of copying data from primary storage pool to a copy storage pool has completed.

System action

None.

User response

None.

ANR02 21I Tiering process *process ID* for storage rule *stgrule_name*, subrule *subrule_name* started from storage pool *source_stgpool* to *tgt_stgpool_type* storage pool *target_stgpool*.

Explanation

The server started the tiering process to move client data that meets the specified criteria for age and state. The data can include backup, archive, and space-managed files. The tiering process was started as process number *process ID*.

System action

Server operation continues. The tiering process can be canceled, if necessary.

User response

No action is required. However, you can query the process by using the QUERY PROCESS command. You can cancel the process by using the CANCEL PROCESS command.

ANR02 22E Error action disk definition file *file specification*.

Explanation

An error occurred creating or changing the disk definition file.

System action

None.

User response

Attempt to determine the cause of the write error and correct it.

ANR02 23E Command: *command* is rejected because a server operation is already being processed for that job.

Explanation

The server attempted to run the command, but another job operation is currently running on that job. For example if a TERMINATE JOB command is issued for a job for which a TERMINATE JOB command has already been issued, the second command fails.

System action

The command fails and server operation continues.

User response

Use the QUERY ACTLOG command with the JOB parameter to determine which operation is pending for the job of interest.

ANR02 24I Command: *command* started.

Explanation

The server accepted a command for a job that is currently running. The server quiesces the job, then runs the command.

System action

The command is accepted which causes the job to be quiesced in the background. Once the job quiesces, the command completes and a message is issued to the activity log which indicates the status of the completed command.

User response

Later, use the QUERY ACTLOG command with the JOB parameter to determine if the command completed successfully, or if an error occurred which prevented the command from completing successfully.

ANR02 25S Invalid use of the -S command-line option.

Explanation

The -S option cannot be specified on the command line if the database ID file (dsmserv.dbid) is intact. This option is to be used only if the ID file does not exist.

System action

The server does not start.

User response

Start the server without specifying the -S command-line option.

ANR02 26S The database ID file could not be found for server startup.

Explanation

The server's database ID file (dsmserv.dbid) could not be found. This file is created when the database is formatted, is stored in the directory from which the format is performed, and is required for normal server operation.

System action

The server does not start.

User response

Ensure that you are starting the server from the correct instance directory, and that the dsmserv.dbid file exists and can be read. If no dsmserv.dbid file exists, restart the server with the -S option to create a new database ID file.

ANR02 Incorrect database opened. Server cannot start.
27S

Explanation

The ID of the database opened does not match the ID stored in the database ID file (dsmserv.dbid).

System action

The server does not start.

User response

Ensure that you are in the proper instance directory for the database being opened, and that the environment is set up correctly. The instance directory is generally the directory from which you formatted the database,

or, if on UNIX, have specified with the -i command-line option. When the ID of the database that is opened does not match the ID that is stored in the database ID file (dsmserv.dbid), the server will not start. Use the -S (skip DB ID check) parameter after deleting the dsmserv.dbid file. After the initial use of the -S parameter in a restore scenario, the server creates a new dsmserv.dbid file in the instance directory.

ANR02 Error errno opening the database ID file for server startup.
28S

Explanation

The server's database ID file (dsmserv.dbid) could not be opened. The errno indicates the reason for the failure.

System action

The server does not start.

User response

Ensure that you are starting the server from the correct instance directory, and that the dsmserv.dbid file has the correct ownership and permission. If the file is empty, erase the file, and restart the server with the -S command-line option to generate a new database ID file.

ANR02 Server is unable to add entries to the Activity Log. Console messages will
29W

not be logged until database access is available.

Explanation

The process that monitors the default (console) output stream and maintains the activity log cannot update the activity log. The error is due to the inability of the server to access the server database.

System action

The server does not update the activity log. The activity log will continue to run and attempt to recover from this situation.

User response

Access to the server database is temporarily unavailable. The server database manager will attempt to recover from this situation and reestablish access to the server database. When access to the server database is reestablished, the activity log processing will continue. If the server database access fails to be reestablished, additional messages will be issued providing more information.

ANR02 The copying process (process number process ID) for storage rule stgrule name is completed. Data was copied from storage pool source stgpool to
30I

target stgpool type storage pool target stgpool. Copied Files: copied files, Copied Bytes: copied bytes, Skipped Files: skipped files, Skipped Bytes: skipped bytes, Total Bytes Transferred: transferred bytes, Elapsed time: elapsed time.

ANR02 The copying process (process number process ID) for storage rule stgrule name, subrule subrule name, is completed. Data was copied from storage pool source stgpool to target stgpool type storage pool target stgpool. Copied Files: copied files, Copied Bytes: copied bytes, Skipped Files: skipped files, Skipped Bytes: skipped bytes, Total Bytes Transferred: transferred bytes, Elapsed time: elapsed time.
31I

ANR02 The retention set copying process process ID for storage rule stgrule name is completed. Data was copied from retention set
32I

retention set ID to destination stgpool type storage pool destination stgpool. The following results are available:
copied files:
copied files,
copied bytes:
copied bytes,
skipped files:
skipped files,
skipped bytes:
skipped bytes,
total transferred bytes:
transferred bytes,
elapsed time:
elapsed time.

Explanation

The retention set copying process ended with the displayed results.

System action

System operation continues.

User response

No action is required.

ANR02 The tiering process for node 33W
node and filespace
filespace
skipped files
files and bytes
bytes because
copy storage
rule operations
are pending.

Explanation

Both copy storage rules and tiering rules are defined for the specified node and filespace. Files that are eligible to be

copied and tiered must be copied first and then tiered. In this case, copy operations were pending for the specified files. After copy operations are completed, the files will be tiered the next time that the tiering rule runs.

System action

The tiering process was completed with the specified results. System operation continues.

User response

No action is required.

ANR02 The 34E
command_name
command failed
because job
jobid has a job
type of jobtype,
which is not
supported for
this command.

Explanation

The specified command failed because the command is not supported for this job type.

For example, the **RESUME JOB, INTERRUPT JOB,** and **TERMINATE JOB** commands are only supported for jobs with a *RetSet* job type. If you issue these commands for jobs with a job type other than *RetSet*, the command fails.

System action

The server does not process the command.

User response

Ensure that you are issuing a command that

is supported for the job type.

ANR02 Fail to start the 36E
database
manager due to
an I/O error.
Check for
filesystem full
conditions, file
permissions,
and operating
system errors.

Explanation

The IBM Storage Protect server encountered an I/O error while attempting to start the database manager.

System action

The server process ends.

User response

Review the filesystems assigned to the server for the database and recovery log.

ANR02 Fail to start the 37E
database
manager. An
unexpected
system error
occurred.

Explanation

An unexpected system error occurred.

Some common reasons for this error are:

- The system name where you ran the server has been changed
- The system date and time is set incorrectly

System action

The server process ends.

User response

Contact your service representative.

ANR02 A database 38E
recovery task is
prohibiting
activation of db
name with
sqlcode dbCode.

Explanation

While attempting to activate the database an error occurred because the database was busy performing a BACKUP, RESTORE or was in ROLLFORWARD pending state. Examine the sqlcode to determine the condition that is preventing the database from activating. The following sqlcodes are most likely to occur during the activate database step and will prevent the server from starting.

SQLC_RC_BKP_PEND (-1116) indicates a database BACKUP is pending and must complete prior to activating the database. Once the database BACKUP is complete, the database can be activated by starting the server.

SQLC_RC_ROLLFWD_PEND (-1117) indicates a database Roll Forward operation is pending and must complete before activating the database. After the Roll Forward recovery step is complete, the database can be activated by starting the server.

SQLC_RC_BKP_INPROG (-1118) occurs when an attempt to activate the database fails because a

database BACKUP was in progress. Prior to activating the database, it is necessary to rerun database BACKUP. Once the database BACKUP completes successfully, the database can be activated by starting the server.

SQLC_RC_RST_INPROG (-1119) shows that a database RESTORE was in progress when the database failed to activate. The RESTORE database must be restarted and allowed to complete successfully before activating the database. Once the database RESTORE is complete, the database can be activated by starting the server.

SQLC_RC_BR_INPROG (-1120) means that either a database BACKUP or RESTORE must complete before activating the database. Ensure that either a BACKUP or RESTORE operation completes successfully before activating the database.

System action

The server is not started because the database cannot be activated.

User response

See message explanation for more information.

ANR02 39E **The Db2 instance name *instance name* may not be valid or is not configured properly. The return code was *sqlcode***

Explanation

IBM Storage Protect Server attempted to connect using the database instance set by the DB2INSTANCE environment variable, but the attempt failed.

System action

The server is not started because the database instance is not valid.

User response

Verify that the database instance exists and that it is configured properly. You can list Db2 instances by issuing the db2ilist command from the instance directory, under the Db2 installation directory. Example:
c:\Program Files\tivoli\tsm\db2\instance\db2ilist

ANR02 40E **Administrator *administrator* is the only designated approval administrator and cannot be removed. Command *command* is not processed.**

Explanation

When command approval is enabled, there must be at least one administrator who is designated as an approval administrator. The specified administrator is the only designated approval administrator and cannot be removed.

System action

The server does not process the command.

User response

Designate a different administrator as an approval administrator by issuing the UPDATE ADMIN or REGISTER ADMIN command and specifying the CMDAPPROVAL=YES parameter value. Then, reissue the command.

ANR02 41E **Command *command*: Administrator *administrator* cannot be removed because the administrator issued commands that are pending approval.**

Explanation

The specified administrator issued commands that are pending approval by an approval administrator. The specified administrator ID cannot be removed until the pending commands are approved, rejected, or withdrawn.

System action

The server does not process the command.

User response

Wait for the commands to be approved or rejected by a designated approval administrator. Then, reissue the command to remove the administrator.

Alternately, the specified administrator can withdraw pending commands by issuing the WITHDRAW PENDINGCMD command.

ANR02 45I **No pending commands were found. Command *command* is not processed.**

Explanation

There are currently no commands that are pending approval by an approval administrator.

System action

None.

User response

None.

ANR02 46E **The request was already processed. Request ID:*requestId*.**

Explanation

The specified request was already processed and cannot be processed again. Command approval requests can be processed only if they are in a pending state.

System action

The command was already processed and is not processed again.

User response

None.

ANR02 47E **Administrator *administrator* cannot withdraw**

pending command because a different administrator submitted the command for approval. Request ID: *requestId*.

Explanation

The specified administrator cannot withdraw the request to process a command that is pending approval. Only the administrator who issued the command request can withdraw it.

System action

System operation continues, but the pending command is not withdrawn.

User response

To withdraw the pending command request, the administrator who issued the command must withdraw the request by issuing the WITHDRAW PENDINGCMD command.

ANR02 Command:
48E Invalid request ID. Request ID: *requestId*.

Explanation

The specified request ID is not valid.

System action

The command is not processed.

User response

To identify the correct request ID, issue the QUERY PENDINGCMD command. Then, reissue the specified command.

ANR02 Command:
49E Administrator administrator is not an approval administrator and cannot process pending commands.

Explanation

The specified administrator is not designated as an approval administrator. Only approval administrators can process pending commands.

System action

The server does not process the command.

User response

To designate an administrator as an approval administrator, issue the UPDATE ADMIN command and specify the CMDAPPROVER=YES parameter value. The approval administrator must start a new session before the changes take effect. Then, reissue the command.

ANR02 The command
50E command is invalid because command approval is not enabled.

Explanation

The specified command is not valid because

the command approval feature is turned off.

System action

The command is not processed.

User response

Determine whether the command approval feature is enabled by issuing the QUERY STATUS command. If command approval is not enabled, enable it by issuing the SET COMMANDAPPROVAL command and specifying the ON parameter value.

ANR02 A request for
51W approval to process the command command, which was issued by administrator administrator name, was automatically rejected because command approval was turned off. Request ID: *request_id*.

Explanation

The command was automatically rejected because command approval was turned off.

System action

The specified command is no longer pending approval and will not run.

User response:

Reissue the command if needed.

ANR02 Storage rule
52I *storage rule name* created for retention with defaults: MAXPROCESS maximum number of processes, DURATION NOLIMIT, STARTTIME start time, ACTIVE YES, DELAY delay.

Explanation

A retention storage pool is defined and the associated storage rule is created. The values used for the storage rule definition are displayed.

System action

System operation continues.

User response:

If any of the values need to be changed, use the UPDATE STGRULE command to make those changes.

ANR02 Retention set
53I *retsetid* expiration date is past. The server sets the retention set state to Incomplete and the job status to Terminated.

Explanation

During storage rule processing, a retention set was found in Copying state, and the associated job was in Sleeping status. Generally, these retention sets are candidates to be

processed. However, this retention set is expired.

System action

The server sets the retention set to Incomplete state and the job status to Terminated.

User response

To process expired retention sets, issue the EXPIRE INVENTORY command.

ANR02 54W **Expiration processing skipped objects in fsId filepath id and node ID nodeId.**

Explanation

Some objects in the specified node and file space were skipped during expiration processing. If you are using dissimilar policies on the source and target replication servers, the objects might have been skipped because they have not yet been replicated to the target replication server.

System action

System processing continues.

User response

Determine whether you are using dissimilar policies on the source and target servers by issuing the **VALIDATE REPLPOLICY** command. If you are using dissimilar policies, files that are marked for immediate expiration on the source replication server are not

deleted until they are replicated to the target replication server.

ANR02 55E **Command: The command was not processed because the file space is already configured to the maximum number of number target servers.**

Explanation

A file space cannot be defined on a subrule if the file space is already configured to the maximum number of target servers that are allowed for an active storage rule.

System action

System operation continues.

User response

The specified file space is already configured for replication. However, you can take one of the following actions:

- You can remove the file space from a previously defined storage rule or subrule by using the UPDATE STGRULE or UPDATE SUBRULE command. Then, you can add the file space to the subrule that you were updating when this message was issued.
- You can add a different file space to the subrule that you were updating when this message was issued.

ANR02 56I **The filepath for node node name is defined**

on storage rule storage rule name and subrule subrule name

Explanation

The filepath is defined in the specified subrule and active storage rule.

System action

Server operation continues.

User response

No action is required.

ANR02 57E **Command: The command was not processed because the maximum number of target servers is reached for storage rules.**

Explanation

If a storage rule has the maximum number of target servers defined, you cannot specify an additional target replication server. The following rules apply when you define a target replication server for a storage rule:

- You can configure a maximum of three target servers across all active and inactive replication storage rules.
- You can configure a maximum of two target servers across all active replication type storage rules.
- You can configure a maximum of three target servers across all

inactive replication type storage rules.

System action

System operation continues.

User response

When you reissue the command, specify a target server that is not defined on other replication storage rules.

ANR02 58I **Tiering process process ID from source storage pool source storage pool prevented count client nodes from being processed.**

Explanation

The following scenarios are invalid for tiering data:

- S3 client node data cannot be tiered to tape storage pools.
- OSSM client node data cannot be tiered.

System action

Server operation continues.

User response

No action is required.

ANR02 59I **Copy storage rule process process ID from source storage pool source storage pool prevented count client nodes from being processed. Check number**

of copied files and bytes.

Explanation

The following scenarios are invalid for copying data via storage rule:

- S3 client node data cannot be copied to tape storage pools through storage rules.
- OSSM client node data cannot be copied through storage rules.

System action

Server operation continues.

User response

No action is required.

ANR02 A database file IO error is prohibiting activation of db name with sqlcode dbCode.

Explanation

While attempting to activate the database an IO error occurred when processing a database file. The problem may have occurred in one of the following situations: The system cannot open, read from, or write to a database file. The system cannot create the database because an error occurred while the system was creating a database file or a directory for the database. The system cannot drop the database because an error occurred while the system was deleting a database file or a directory for the

database. The system cannot create the database because an interrupt was received while the system was creating or deleting a database file or a directory for the database. The system cannot locate the database subdirectory or database configuration file during connect. Problem causes are ordered in terms of their frequency of occurrence: A log file cannot be found in the active log path directory. There may be a problem with the database directory the operation is being attempted on. There may be inadequate disk space to complete the operation. The database cannot be used.

System action

The server is not started because the database cannot be activated.

User response

Appropriate responses for the problem causes described above are: To verify if a log file is missing, check the db2diag.log for the presence of a logging error (return code contains SQLO_FNEX). If present, this error will contain the name of the missing log file. Ensure that the file is located in the active log path directory. If the file cannot be located, restore and roll-forward the database to an earlier point in time referenced in a log file preceding the missing log file (use a timestamp that

is earlier than that of the missing file). There may be a problem with the database directory. Check the integrity of the directory. Examples of potential problems include: permissions issues, mount point problems, corruption. Increase filesystem size.

ANR02 Not initializing library library name because the library is set offline .

Explanation

The External Library is set offline. It will not be used for new transactions until it is set online again.

System action

This server skips the initialization of the library. The server continues processing.

User response

Refer to the UPDATE PATH command for details on changing the online option.

ANR02 Attempt to access library library name failed, because the library is set offline.

Explanation

The Library is set offline. It will not be used for new transactions until it is set online again.

System action

This mount fails.

User response

Refer to the UPDATE PATH command for details on changing the online option.

ANR02 Detected schema change for table table, attempting to reconcile.

Explanation

The schema for the table referenced does not match the server definition for this table. The schema difference for this table will be reconciled.

System action

Server startup continues if the schema difference was successfully reconciled. Server startup will fail if the schema reconciliation failed.

User response

The schema for this table will attempt to be reconciled. Specifically, the server will try to modify the table in the database to match the schema that was expected. A message will be issued indicating the success or failure of the schema reconciliation.

ANR02 Schema reconciliation for table table succeeded.

Explanation

The schema differences for this table were successfully reconciled.

System action

Server operation continues.

User response

None

**ANR02 Schema
77E reconciliation
for table *table*
failed.**

Explanation

The server was unable to reconcile the schema differences for the indicated table.

System action

Server operation terminates.

User response

Contact your IBM service representative.

**ANR02 The database
78S manager cannot
create the
database
because of a
virtual memory
shortage.**

System action

Server operation stops.

User response

Stop other applications running on the system, especially those that use large amounts of shared memory.

**ANR02 Database
79S manager failed
to start due to
incorrect
service logon
credentials.**

Explanation

The server was unable to start the database manager because the database manager service credentials (userid and/or password) are incorrect.

System action

Server initialization stops.

User response

Correct the logon properties for the database manager service by using the Services dialog box from the Control Panel.

**ANR02 Servermon
80W failed to start
during
initialization.**

Explanation

The server was unable to start the servermon monitoring process. This will prevent the automated collection of system health information.

System action

Will disable server monitoring.

User response

User should correct reason for servermon initialization failure and restart server to enable servermon.

**ANR02 Servermon
81I successfully
started during
initialization,
using process
process id.**

Explanation

The server was able to start the servermon monitoring process, or find that an existing servermon process was running for this instance. This will allow for the automated collection of system health information.

System action

Will collect server monitoring information.

User response

None.

**ANR02 Error return
82W code accessing
or creating
directory
directory name:
this will prevent
the execution of
servermon**

Explanation

The directory path for servermon can not be accessed or created. This will prevent servermon from collecting monitoring information.

System action

Will not start servermon.

User response

Ensure that you have the proper authorization to access or create the directory for use by servermon.

**ANR02 Error return
83W code copying
source file to
target file. This
will prevent the**

execution of
servermon.

Explanation

The file copy for servermon cannot be fulfilled. This file is required for proper execution of servermon.

System action

Will not start servermon.

User response

Ensure that you have the proper authorization to copy the specified file for use by servermon.

**ANR02 Reorganization
93I for table *table*
name started.**

Explanation

The server is performing an online reorganization for the table referenced.

System action

The server will continue to operate.

User response

Monitor the available log space in the active log and archive log storage paths. If the log space available to the filesystem begins to fill up, then perform a BACKUP DATABASE command with the TYPE=FULL parameter in order to initiate pruning of the archive log space.

**ANR02 Reorganization
94I for table *table*
name ended.**

Explanation

The server online reorganization for the table referenced has ended.

System action

The server will continue to operate.

User response

Review the available log space in the active log and archive log storage paths. If the log space available to the filesystem has to filled up or is close to filling up, then perform a BACKUP DATABASE command with the TYPE=FULL parameter in order to initiate pruning of the archive log space.

ANR02 97I A full database backup might be required. The last log number used is last log used and the first log number used is first log used. The log file size is log file size megabytes. The maximum log file size is maximum log file size megabytes.

Explanation

When the log space used since the last database backup exceeds the maximum log file size, either a full database backup is required, or the maximum log file size must be increased.

System action

None.

User response

None.

ANR02 98S Authority is insufficient to access the database.

Explanation

If the server is starting, then the user ID under which the dsmserv process is running does not have sufficient authority to access the database. If the server is running and a server operation failed, then the user ID does not have sufficient authority to perform the operation.

System action

If the server is starting, the dsmserv process ends. If the server is running, the server stops.

User response

Ensure that the user ID under which the server is running is either the instance user ID, or is authorized to access the database.

ANR02 99I A full database backup will be started. The archive log space used is archive log% and the archive log space used threshold is arch log threshold%.

Explanation

When the archive log space used exceeds the threshold, a full database backup will be started.

System action

None.

User response

None.

ANR03 00W Instance directory instance directory has free space GB available space of capacity GB total capacity.

Explanation

The server instance directory exceeds the threshold of its assigned capacity specified by the INSTDIRTHRESHOLD server option.

System action

Server operation continues, but a continued decrease in the amount of free space in the instance directory might cause the server to halt.

User response

Remove unnecessary files or extend the instance directory file system.

ANR03 01W Unable to create or open file file name.

Explanation

The server is attempting to open a file in the instance directory to use for storage of servermon

data. This operation has failed.

System action

Server operation continues, however no servermon data will be captured until this failure is corrected.

User response

Correct the issue preventing the creation or access to the file. Likelt causes are permissions or file system space.

ANR03 02W Server monitoring has been disabled by option.

Explanation

The server has server monitoring disabled by the option ALWAYSONSERVERMON currently being set to false.

System action

Server operation continues, but no data will be collected for performance or reliability evaluation. Should a problem occur on the system there will be no corresponding data to help in determining root cause.

User response

Change the ALWAYSONSERVERMON option to true.

ANR03 14W Recovery log usage exceeds utilization percentage % of its assigned capacity.

Explanation

This message is issued to notify the administrator that the server recovery log utilization exceeds 90% or more of its assigned capacity.

System action

Server operation continues.

User response

- If the server is operating in NORMAL log mode, depending upon the size of your recovery log, add recovery log volumes, or extend the recovery log, or both, before it fills completely. Refer to the DEFINE LOGVOL, and EXTEND LOG commands for more information on these operations.
- If the server is operating in ROLLFORWARD log mode:
 - backup the database, or
 - define a database backup trigger if one is not already defined, or
 - lower the database backup trigger if one is defined

Refer to the DEFINE DBBACKUPTRIGGER or UPDATE DBBACKUPTRIGGER commands.

ANR03 A full backup for database DB Name cannot be started. This backup is required.

Explanation

An automatic full backup was attempted for this database. However, the device class for database backups has not been specified.

System action

The database backup operation is not started.

User response

Issue the SET DBRECOVERY command to specify the default device class for automatic database backups. Then, issue the BACKUP DB command and specify TYPE=FULL to back up the database.

ANR03 Reorganization of indices for table table name started.

Explanation

The server is performing an online reorganization for the indices of the referenced table.

System action

The server will continue to operate.

User response

Monitor the available log space in the active log and archive log storage paths. If the log space available to the filesystem begins to fill up, then perform a BACKUP DATABASE command with the TYPE=FULL parameter in order to initiate pruning of the archive log space.

ANR03 Reorganization of indices for table table name ended with sqlCode dbCode.

Explanation

The server online reorganization for the indices for the table referenced has ended.

System action

The server will continue to operate.

User response

Review the available log space in the active log and archive log storage paths. If the log space available to the filesystem has to filled up or is close to filling up, then perform a BACKUP DATABASE command with the TYPE=FULL parameter in order to initiate pruning of the archive log space.

ANR03 The file system for the database archive log has insufficient free space.

Explanation

The usage of the file system for the database archive log has exceeded the ARCHLOGUSEDTHRESHOLD. Space is used by files that are not database archive log files, and the BACKUP DB command cannot free space in the filesystem..

System action

The server will continue to operate.

User response

Create sufficient free space on the file system so that usage does not exceed the ARCHLOGUSEDTHRESHOLD.

ANR03 Storage agent storage agent is not able to use device class device class for storage pool storagepool for LAN-Free data movement operations.

Explanation

The storage agent referenced is not able to perform LAN-Free data movement operations using this storage pool and device class. The storage agent is back-level and is not able to support LAN-Free operations using this device class.

System action

LAN-Free data movement operations are not performed. The operations are either sent via the LAN or else proxied by the storage agent directly to the server.

User response

In IBM Storage Protect version 5.3, a change was made to the way the FILE and device classes are supported. This change prevents back-level storage agents from being able to use these device classes. The storage agent should be upgraded to the same

version and release as the server. Until the storage agent is upgraded, any LAN-Free data movement operations that are attempted will be done using the LAN.

ANR03 21W Storage agent storage agent name at version storage agent VRMF does not support operation operationName, although the server server name at version server VRMF can support it.

Explanation

The storage agent is at an earlier version than the server and is not able to use advanced functions that were requested by a client.

System action

The operation is not allowed.

User response

The storage agent must be upgraded to a version, release, and level that supports this operation. Typically, the problem is that the storage agent and server are not at the same version and release. For example, if the server is version 5.3.0.0 and the storage agent is version 5.2.3.0, the storage agent needs to be upgraded to version 5.3.0.0 to perform the requested function.

If this was a restore or retrieve operation and the client node DATAREADPATH setting

was ANY or LANFREE, the server will override this to be LAN only. This will cause the operation to fail on the storage agent and message ANR0416W to be issued. Retry the operation after performing one of the following actions:

- Halt the storage agent, upgrade the storage agent program, and then restart the storage agent.
- Set the ENABLELANFREE client option to NO, and then restart the client

If this was a no-query restore operation, the data was not restored by the storage agent using LAN-Free data transfer. If the client node is allowed to read data over the LAN, the data was restored over the LAN. If the operation failed because the client node is not allowed to read data over the LAN, consider updating the DATAREADPATH setting for this node by using the UPDATE NODE command.

If this was an operation performed by an agent node with proxy node authority to a target node, the session failed with a protocol error. The operation was attempted by a version 5.3 or higher client and server, but the storage agent is not able to support this operation. To allow an agent node to perform operations for a target node, the storage agent must be upgraded to version 5.3.0 or later.

ANR03 22E The NEWSTGPOOL parameter is not

valid for deduplicated volume volume name.

Explanation

The volume contains one or more deduplicated objects and must be restored to the original storage pool.

System action

The operation is not allowed.

User response

To restore the volume to the original storage pool, reissue the RESTORE VOLUME command without the NEWSTGPOOL parameter.

ANR03 23E The NEWSTGPOOL parameter is not valid for deduplicated storage pool pool name.

Explanation

The storage pool contains deduplicated objects and must be restored to the original storage pool.

System action

The operation is not allowed.

User response

To restore the storage pool to the original storage pool, reissue the RESTORE STGPOOL command without the NEWSTGPOOL parameter.

ANR03 24E command: Replication parameters

cannot be used with the TYPE=SERVER parameter.

System action

The command failed.

User response

Reissue the command without replication parameters. Replication parameters include REPLSTATE, REPLMODE, BKREPLRULEDEFAULT, ARREPLRULEDEFAULT and SPREPLRULEDEFAULT.

ANR03 25E command: Operation is not allowed because node nodename is a replica.

Explanation

The specified node is a replica of a node on another server, created using the REPLICATE NODE command.

You can restore or retrieve data from this node, but you cannot store new data or alter existing data in any way.

System action

Client sessions that attempt to store new data or change existing data will be terminated with a protocol error. IMPORT operations will skip the node.

User response

Perform the operation on the server on which the original node resides.

ANR03 26E *command: The ROLEVERRIDE parameter cannot be used with either the TYPE=SERVER or TYPE=NAS parameter.*

System action

The command failed.

User response

Reissue the command without the ROLEVERRIDE parameter.

ANR03 27I *Replication of node **node list** completed. Files current: **files current**. Files replicated: **files replicated of files to replicate**. Files updated: **files updated of files to update**. Files deleted: **files deleted of files to delete**. Amount replicated: **amount replicated of amount to replicate**. Amount transferred: **amount transferred**. Elapsed time: **elapsed time**.*

Explanation

The replication process has completed. The meanings of the numbers are:

- Files current indicates the number of files that do not need to be replicated.

- Files replicated indicates the number of files successfully replicated out of the number of files that we attempted to replicate.
- Files updated indicates the number of files which had meta-data updated on the target server out of the number of files that needed an update.
- Files deleted indicates the number of files deleted from the target server out of the number that needed to be deleted.
- Amount replicated indicates the size of the files that were replicated out of the size of the files that needed to be replicated
- Amount transferred indicates the number of bytes transferred for the files that were replicated. For compressed files, the number of bytes transferred is the compressed size in bytes. The total number of bytes transferred can be less than the amount replicated if data deduplication or compression is used to reduce the amount of data transferred.
- Elapsed time indicates how long the process ran

System action

None.

User response

None.

ANR03 28I *Replication preview of*

*node(s) **node list** completed. Files current: **files current**. Files to be replicated: **files to replicate**. Files to be updated: **files to update**. Files to be deleted: **files to delete**. Amount to replicated: **amount to replicate**. Estimated run time: **estimated runtime**.*

Explanation

The replication process has completed in preview mode. The meanings of the numbers are:

- Files current indicates the number of files that do not need to be replicated.
- Files to be replicated indicates the number of files requiring replication.
- Files to be updated indicates the number of files requiring a meta-data update.
- Files to be deleted indicates the number of files to be deleted from the target server.
- Amount to be replicated indicates the size of the files that require replication.
- Estimated run time is an estimate of how long the process will run.

System action

None.

User response

None.

ANR03 29I *Starting replication of data type **data** for node **node name**, file space ID **file space id**.*

Explanation

The replication process has started processing data for the specified node and file space ID.

System action

None.

User response

None.

ANR03 30W *Session **session number** for node **node name** (**client platform**) refused - invalid authentication protocol requested.*

Explanation

The server refuses a request to start a session because an invalid authentication protocol was requested during sign-on processing. This might be due to a down-level client, server, or storage agent that is accessing a server or storage agent that is configured to disallow such attempts.

System action

Server operation continues.

User response

Upgrade the accessing client, server, or storage agent to version 6.3 or later, or re-configure the server to allow access from down-level clients, servers, or storage agents.

ANR03 31W Replication session for server *server name* refused - server is down-level.

Explanation

The server specified for replication cannot be used because it is not at the current level.

System action

Server operation continues.

User response

Upgrade the server to version 6.3 or later, or specify a different server for replication.

ANR03 32E Replication mode *source repl mode* of node *node name* is incompatible with mode *target repl mode* on server *server name*.

Explanation

The replication mode of the indicated node is incompatible. If the source mode is SEND, the target mode must be RECV. If the source mode is SYNCSEND, the target mode must be SYNCRECV. The source mode cannot be anything

other than SEND or SYNCSEND.

System action

The replication of the node's data fails. Server operation continues.

User response

Use the UPDATE NODE command to put the node in the proper state on both the source and target servers.

ANR03 33E Server *server name* is disabled for outbound sessions. The session request is rejected.

Explanation

The DISABLED SESSION SERVER command disabled outbound sessions for the indicated server. Sessions to this server are not permitted.

System action

The session request fails. Server operation continues.

User response

Issue the QUERY STATUS command to view the servers that are disabled for inbound and outbound sessions. Issue the ENABLE SESSIONS SERVER command to make the server available for outbound sessions.

ANR03 34E Server *server name* is disabled for inbound sessions. The session request is rejected.

Explanation

The DISABLED SESSION SERVER command disabled inbound sessions for the indicated server. The indicated server is not permitted to initiate sessions to this server.

System action

The session request fails. Server operation continues.

User response

Issue the QUERY STATUS command to view the servers that are disabled for inbound and outbound sessions. Issue the ENABLE SESSIONS SERVER command to make the server available for inbound sessions.

ANR03 35I Schema reconciliation for table *table* in progress; *pct%* completed.

Explanation

The schema for this table is reconciling.

System action

Schema reconciliation will continue for this table.

User response

None

ANR03 36I Runstats for table *table name* started.

Explanation

The server is performing an online runstats on the referenced table.

System action

Server operation continues.

User response

None.

ANR03 37I Runstats for table *table name* ended with *sqlCode dbCode*.

Explanation

The server online runstats for the table referenced has completed.

System action

Server operation continues.

User response

For a non-zero *sqlCode*, consult the Db2 Information Center for details.

ANR03 38E Database create terminated.

Explanation

Db2 detected a problem during the create database operation. The source of the problem might be a Db2 limitation. When "No File System Caching" is used to create a table space with Database Managed Storage containers, Db2 only supports storage devices with a sector size of 512 Bytes on AIX, Solaris, Linux, Windows, and a sector size of 1024 Bytes on HP-UX.

System action

The create database operation is terminated.

User response

See the db2diag.log file for additional information to confirm the Db2 limitation. Change the sector size to 512 Bytes on AIX, Solaris, Linux, Windows, and to 1024 Bytes on HP-UX.

ANR03 command:
39E Outbound replication is disabled.

Explanation

Replication operations originating from this server are disabled.

System action

Processing ends.

User response

Use the ENABLE REPLICATION command to re-enable the use of replication.

ANR03 command:
40E Outbound replication operations are disabled because the database was restored.

Explanation

The database for this server was restored. Data that was on this server but that is not referenced by the restored database is no longer accessible. To prevent this server from deleting copies of data that might exist on the target replication servers, replication operations originating from this server are disabled.

System action

Processing ends.

User response

Disabling replication after a database restore is a precautionary step to alert the user of the potential that a restored database might contain node inventory that could result in the loss of filespace data on a target replication server that is using node replication. If replication was not used on this server before the database restore, issue the ENABLE REPLICATION command to resume replication operations.

To preserve the data that exists on target replication servers, determine whether copies of data that are on the target replication server are needed. If they are, you must replicate data that is on the target replication server to the source replication server. After the replication is complete, issue the ENABLE REPLICATION command to resume replication operations.

For example, suppose that PRODSRV is the source replication server. The data belonging to client node NODE1 was replicated from PRODSRV to DRSRV, the target replication server. The database on PRODSRV was restored.

To resume replication, complete the following steps:

1. On PRODSRV and DRSRV, remove NODE1 from

replication by issuing the following command: REMOVE REPLNODE NODE1.

2. Update NODE1 definitions. When replication occurs, DRSRV will send the data to PRODSRV that was lost because of the database restore.
 - a. On DRSRV, issue the following command: UPDATE NODE NODE1 REPLSTATE=ENABLED REPLMODE=SYNCS END.
 - b. On PRODSRV, issue the following command: UPDATE NODE NODE1 REPLSTATE=ENABLED REPLMODE=SYNCR ECEIVE.
 3. On DRSRV, set the replication rules to match those on PRODSRV. For example, if only archive data was being replicated from PRODSRV to DRSRV, set the rules on DRSRV to replicate only archive data from DRSRV to PRODSRV. Backup and space-managed data will not be replicated to PRODSRV.
 4. On DRSRV, set the target replication server by issuing the following command: SET REPLSERVER PRODSRV.
 5. On DRSRV, replicate data belonging to NODE1 by issuing the following command: REPLICATE NODE NODE1. Replication processing changes the replication mode of NODE1 to SEND on DRSRV and to RECEIVE on PRODSRV.
 6. On PRODSRV and DRSRV, remove NODE1 from replication by issuing the following command: REMOVE REPLNODE NODE1.
 7. Update NODE1 definitions:
 - a. On PRODSRV, issue the following command: UPDATE NODE NODE1 REPLSTATE=ENABLED REPLMODE=SYNCS END.
 - b. On DRSRV, issue the following command: UPDATE NODE NODE1 REPLSTATE=ENABLED REPLMODE=SYNCR ECEIVE.
 8. On PRODSRV, enable replication by issuing the following command: ENABLE REPLICATION.
 9. On PRODSRV, replicate data belonging to NODE1 by issuing the following command: REPLICATE NODE NODE1. Replication processing changes the replication mode of NODE1 to SEND on PRODSRV and to RECEIVE on DRSRV.
- The original replication configuration is restored. PRODSRV has all the data that was lost because of the database restore.
- REMEMBER: To replicate data that was on

DRSRV, you set the target replication server to PRODSRV. In your original configuration, if you were replicating data from DRSRV to another server, for example, BKUPDRSRV, you must reset the target replication server. To reset the target replication server, issue the following command on DRSRV: SET REPLSERVER BKUPDRSRV.

ANR03 41E *command with keyword is not allowed when archive data retention protection is enabled.*

Explanation

The specified command with the specified keyword is not allowed when archive data retention protection is enabled on the server.

System action

Processing continues.

User response

None.

ANR03 43W *File space **filespace name** could not be created by node \$\$_TSMDBMGR_\$. \$\$_TSMDBMGR_\$\$ node name is reserved for IBM Storage Protect database backup and restore.*

System action

Server processing continues.

User response

Node \$\$_TSMDBMGR_\$\$ is only used for IBM Storage Protect database backup or restore. The server does not create a file space with this special node since there is no running database backup or restore session.

User response

Use another node name to create this file space.

ANR03 44E *The server failed to restore the database. Missing ARCHIVELOGDIR value in the server option file.*

Explanation

While attempting to restore the database, the IBM Storage Protect server detects a missing value for ARCHIVELOGDIR in the server option file.

System action

Server database restore stops.

User response

Before reissuing the command to restore the database, check the following items:

- Ensure that ARCHIVELOGDIR option has a valid value.
- Ensure that the command is using the

correct options file for the server. If you are using the -o option with the command to specify a server options file, ensure that the name and location of the file is correct.

ANR03 45E *The database manager cannot start while file **file name** exists.*

System action

The server stops.

User response

Remove or rename the specified file and restart the server.

ANR03 46I *Schema reconciliation for table **table** in progress; rows copied of total rows rows have been copied in elapsed minutes minutes (pct% complete).*

Explanation

The schema for this table is reconciling.

System action

Schema reconciliation will continue for this table.

User response

None

ANR03 47E *Database **database name** is reporting a drive is invalid and the database can not be removed.*

Explanation

This message is issued to notify the administrator that the server has detected that the API is reporting an invalid drive condition during a REMOVE DB process.

System action

Server REMOVE DB stops.

User response

Interrogate the database, correct the problem then issue the command again.

ANR03 58E *Database initialization failed: sufficient memory is not available.*

Explanation

During server initialization, the server database fails initialization because sufficient server memory is not available.

System action

Initialization fails.

User response

Make more memory available to the server.

ANR03 61I *Recovery is in progress following a database failure.*

Explanation

During server initialization, the database manager indicated that the database requires failure recovery. A database failure can occur in

the event of a power outage or other abnormal termination of the database manager. Failure recovery can take extensive time, depending on how many transactions in the log require examination.

System action

The server initialization is delayed while the database is recovered.

User response

No action is required.

ANR03 Database 65E database name is currently in use and can not be removed.

Explanation

This message is issued to notify the administrator that the server has detected that the database is currently in use during a REMOVE DB process.

System action

Server REMOVE DB stops.

User response

Drop all database connections then issue the command again.

ANR03 Database 66I database name was removed successfully.

Explanation

This message is issued to notify the administrator that the server has removed the server database successfully.

System action

None.

User response

The server database was removed. In order to run the IBM Storage Protect server, you need to format a new database using the 'DSMSERV FORMAT' command.

ANR03 The server 67W failed to format the database database name. This database name already exists.

Explanation

While attempting to format a database, the IBM Storage Protect server has found that this database name already exists.

System action

Server format stops.

User response

Before reissuing the command to format a new database, check the following items:

- Remove the old database using command 'DSMSERV REMOVEDB DB_NAME'.
- Ensure that the command is using the correct options file for the server. If you are using the -o option with the command to specify a server options file, ensure that the name and location of the file is correct.

ANR03 Stopping the 69I database

manager because of a server shutdown.

System action

Stopping the server's database manager.

User response

None.

ANR03 Diagnostic(ID) 70E During the format operation, the server cannot create files in one or more directories that you specified for log type. Ensure that the file system where the directory is located has sufficient space.

Explanation

Space is not available for the server to write data to the directory.

System action

The format operation stops.

User response

Before reissuing the command to format a new database, check the following items:

- Check whether the format operation created a database but did not remove the database after the failure. If the database that was created was not removed, use the utility DSMSERV REMOVEDB db_name to remove it.

- Check that space is available to the directories that you specified for ACTIVELOGDIR, ARCHIVELOGDIR, and ARCHFAILOVERLOGDIR . Ensure that the amount of space meets requirements. For example, the directory for ACTIVELOGDIR must have at least 8 GB space available.
- Remove any files that are in the directories that you want to use for the recovery logs.

ANR03 Error setting 71E environment variable environment variable name with value value - return code return code value.

Explanation

The server is unable to set the content of the environment variable on the operating system to the value specified in the message. The return code in the message is the last error code set in the operating system. The return code, or, last error code is a system error code as a result of the failed function call to set the environment variable.

System action

The server operation stops.

User response

Refer to the list of system error codes provided by the operating system to determine the cause of the problem. Resolve the

problem and retry the server operation.

ANR03 Database 72E *database name is currently damaged and can not be removed.*

Explanation
This message is issued to notify the administrator that the server has detected that the database is damaged during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 73E *database name is reporting a File error and can not be removed.*

Explanation
This message is issued to notify the administrator that the server has detected that the database is reporting a File error during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 74E *database name*

is invalid and can not be removed.

Explanation
This message is issued to notify the administrator that the server has detected that the API is reporting an Invalid DB error during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 75E *database name is reporting an authorization error and can not be removed.*

Explanation
This message is issued to notify the administrator that the server has detected that the database is reporting an authorization error during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 76E *database name is not found and can not be removed.*

Explanation
This message is issued to notify the administrator that the server has detected that the API is reporting the DB cannot be found during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 77E *database name is reporting a drive is not found and can not be removed.*

Explanation
This message is issued to notify the administrator that the server has detected that the API is reporting a database drive cannot be found during a REMOVE DB process.

System action
Server REMOVE DB stops.

User response
Interrogate the database, correct the problem then issue the command again.

ANR03 Database 78W *database name is reporting a drive is not found and can not be removed.*

Explanation
This message is issued to notify the administrator

that the server has detected that the API is reporting a warning during a REMOVE DB process.

System action
Server REMOVE DB completed successfully.

User response
The drop database command has completed successfully, however, there are some nodes where the database alias or database name was not found. It is possible that DROP DATABASE AT NODE was already performed on these nodes.

ANR03 A server 79W *database deadlock situation has been encountered; the lock request for the lock name lock, key name will be denied to resolve the deadlock.*

Explanation
The server detected a deadlock situation between a number of processes attempting to access database information. A lock request for one of the processes will be denied to resolve the database deadlock. When the server processes encounter a database deadlock, they usually try to run the function that was in progress when the deadlock was encountered again. Not

all process can explicitly try an operation again. For example, migration and reclamation will eventually try again. However, something like a delete volume run in a macro will only be tried again if the delete command is reissued either in the macro or the command line.

System action

A lock request fails for one of the deadlocked processes. Server operation continues.

User response

If a process can be retried (like migration), monitor the retry effort to see if it succeeds. If the process or command cannot be retried, reissue the command or macro that caused the action.

Consider what other processes are running at the time the deadlock is reported. For example, if a process is started manually, as opposed to running as part of your regularly scheduled server maintenance tasks, that process may have caused the deadlock. You might have to adjust the scheduling of your server maintenance tasks to avoid the problem.

ANR03 Evaluating node 87I *node name* using storage agent storage agent for LAN-free data movement.

Explanation

The server is evaluating whether the node and storage agent can use storage pools capable of LAN-free data movement.

System action

The server evaluates the storage pool destinations available to this node and reports which storage pools can and cannot be used for LAN-free data movement.

User response

Review the results of this processing to determine if the appropriate LAN-free environment is configured.

ANR03 Node node name 88I using storage agent storage agent has capable count storage pools capable of LAN-free data movement and not capable count storage pools not capable of LAN-free data movement.

Explanation

The server has completed evaluation of the LAN-free and non-LAN-free storage pool destinations for this node using this storage agent. The server determined that there are *capable count* storage pools that are capable of LAN-free data movement. It also determined that there are *not capable count* storage pools that

cannot be used for LAN-free data movement.

System action

None.

User response

Review the other messages issued to determine which storage pools are capable of LAN-free data movement and those which are not capable of LAN-free data movement for this node using this storage agent.

ANR03 Node node name 89W has data path restrictions.

Explanation

The *node name* has data path restrictions. The registered node has data write path, data read path, or both, configured to not allow LAN-free operations.

System action

None.

User response

Issue the command `QUERY NODE node name F=D` and evaluate the data read path and data write path settings. To store data or read data using LAN-free data movement, set the data write path to ANY or LANFREE.

ANR03 A server 90W database deadlock situation has been encountered; the lock request for transaction

transaction ID will be denied.

Explanation

The server detected a deadlock situation between a number of processes that were attempting to access database information. A lock request for one of the processes is denied, to resolve the database deadlock. When server processes encounter a database deadlock, they usually reattempt the function that was in progress when the deadlock was encountered. Not all process can explicitly try an operation again. For example, migration and reclamation will eventually be tried again. However, something such as a delete volume run in a macro will only be tried again if the delete command is reissued either in the macro or the command line.

System action

A lock request fails for one of the deadlocked processes. Server operation continues.

User response

If a process can try again (like migration), then monitor the subsequent attempt to see if it succeeds or not. If it fails, contact a service representative. If the process or command is not able to automatically try again, then reissue the command or macro that caused the action to occur. If it fails again, contact a service

representative for further assistance to better isolate the deadlock condition.

ANR03 96I *Session session number started for server server name (server's platform) (communication method connection info) for purpose.*

Explanation

A new server session has been initiated by the specified server for the specified purpose. The session number, server's platform type and communication method used by this session are included in the message.

System action

The server begins a communications session to service the administrator client.

User response

None.

ANR03 97I *Session session number for node agent_node has begun a proxy session for node target_node.*

Explanation

A client session has begun proxy operations.

System action

The server granted a proxy session to a client node.

User response

None.

ANR03 98W *Session session number for node agent_node has failed to begin a proxy session for node target_node.*

Explanation

A client session attempted to begin a proxy operation. The server failed the client request. This can occur if the agent node does not have a proxy association with the target node.

System action

The server blocks the proxy authorization attempt.

User response

None.

ANR03 99I *Session session number for node agent_node has ended a proxy session for node target_node.*

Explanation

A proxy session has been ended. The server terminates a session if there is an error in the protocol. On the other hand, the client can also terminate the session.

System action

The server, or the client, has ended a proxy session for a client node.

User response

None.

ANR04 00I *Session session number started for node node*

name (client platform) (communication method).

Explanation

A new client session has been initiated by the specified node. The session number, client platform type and communication method used by this session are included in the message.

System action

The server begins a communications session to service the client node.

User response

None.

ANR04 01W *Session session number for administrator admin name (client platform) refused - server version is down-level with this client.*

Explanation

The server refuses an administrative client session because the client program version level is newer than that supported by the server program.

System action

Server operation continues.

User response

Apply service to the server program to make it compatible with the newer client program, or use an older client

program to contact the server.

ANR04 02I *Session session number started for administrator administrator ID (administrator's platform) (communication method).*

Explanation

A new administrator client session has been initiated by the specified administrator. The session number, administrator's platform type and communication method used by this session are included in the message.

System action

The server begins a communications session to service the administrator client.

User response

None.

ANR04 03I *Session session number ended for node node name (client platform).*

Explanation

A client session has completed normally.

System action

Server operation continues.

User response

None.

ANR04 04W *Session session number for*

administrator
admin name
(*client platform*)
refused - client
is down-level
with this server
version.

Explanation

The server refuses the administrative client session because the client program version level is older than that supported by the server program. For certain problems (such as the compression fix), once an administrative client connects to the server using the newer client, the server records this fact and will not let this administrative client back off this client version to a version that does not include the fix.

System action

Server operation continues.

User response

Apply service to the client program to make it compatible with the newer server program.

ANR04 05I Session session number ended for administrator administrator ID (*client platform*).

Explanation

An administrative client session has completed normally.

System action

Server operation continues.

User response

None.

ANR04 06I Session session number started for node node name (*client platform*) (*communication method communication address*).

Explanation

A new client session has been initiated by the specified node. The session number, client platform type, communication method and address used by this session are included in the message.

System action

The server begins a communications session to service the client node.

User response

None.

ANR04 07I Session session number started for administrator administrator ID (*administrator's platform*) (*communication method communication address*).

Explanation

A new administrator client session has been initiated by the specified administrator. The session number, administrator's platform type, communication method and address

used by this session are included in the message.

System action

The server begins a communications session to service the administrator client.

User response

None.

ANR04 08I Session session number started for server server name (*server's platform*) (*communication method*) for purpose.

Explanation

A new server session has been initiated by the specified server for the specified purpose. The session number, server's platform type and communication method used by this session are included in the message.

System action

The server begins a communications session to service the administrator client.

User response

None.

ANR04 09I Session session number ended for server server name (*client platform*).

Explanation

A server has completed normally.

System action

Server operation continues.

User response

None.

ANR04 10E EXPORT operation to server server name rejected - administrator administrator is not authorized to perform the import operation on the target server.

Explanation

An export operation to the named server was rejected, because the administrator issuing the export command is not defined on the target server or does not have sufficient authority to perform the import operation on the target server.

System action

Server operation continues.

User response

None.

ANR04 11I Session session number for administrator administrator name logged in as node node name restored or retrieved object type object: node node name, filespace filespace name, object object name.

Explanation

This message logs information about an object that was restored or retrieved by an administrator logged in for a node.

System action

Server operation continues.

User response

None.

ANR04 12I *Session session number for node node name(Userid=userid), restored or retrieved object type object: node node name, filesystem filesystem name, object object name.*

Explanation

This message logs information to the activity log about an object that was restored or retrieved by a user logged in for a node. A user ID with no value indicates that an administrative or root user on the platform initiated the restore.

System action

Server operation continues.

User response

None.

ANR04 13I *Session session number for administrator administrator name logged in*

as node node name is restoring backup set: node node name, set filesystem name.

Explanation

This message logs information about a backup set restored by an administrator logged in for a node.

System action

Server operation continues.

User response

None.

ANR04 14I *Session session number for node node name is restoring backup set: node node name, set filesystem name.*

Explanation

This message logs information about a backup set restored by a node.

System action

Server operation continues.

User response

None.

ANR04 15I *Session session number proxied by storage agent name started for node node name.*

Explanation

This session is started for the indicated node and the storage agent acts as the proxy for the node. Client node sessions are used to perform LAN-free operations between the client and server.

System action

Server operation continues.

User response

None.

ANR04 16W *Session session number for node node name not allowed to operation using path data transfer path.*

Explanation

This session attempted this operation using the specified data transfer path. This operation is not permitted for this client.

System action

Server operation continues.

User response

Issue QUERY NODE FORMAT=DETAILED for this node to see the current DATA WRITE PATH or DATA READ PATH settings. These settings determine if a given operation is permitted using a specific data transfer path. If this client node should be permitted to perform this operation using this data transfer path, the UPDATE NODE

command should be used to correct this.

ANR04 17W *Session session number for node node name terminated - data transfer path not allowed.*

Explanation

This session attempted an operation that needed a data transfer path that this node is not allowed to use.

System action

This client session terminates.

User response

Refer to the ANR0416W message that was issued for this client session to determine which operation and data transfer path was attempted.

ANR04 18W *Session session number for administrator administrator name (client platform) is refused because an incorrect password was submitted.*

Explanation

The server refuses a request to start a client session because an invalid password has been submitted by the client during sign-on processing.

System action

The server will continue to deny access attempts

by this client until a valid password is submitted.

User response

Enter the proper password. If you have forgotten the password, contact an authorized administrator, who can assign a new password using the UPDATE ADMIN command.

ANR04 19W Administrative client userid administrative ID cannot be used when authentication is on.

Explanation

The server refuses a request for a client (administrative) session because the user ID specified cannot be used when authentication of IDs is in effect. SERVER_CONSOLE is an administrative ID that has this restriction.

System action

Server operation continues.

User response

Use an administrative ID that was registered for this server and that has a password.

ANR04 20W Session session number for node node name (client platform) refused - server disabled for user access.

Explanation

The server refuses a request for a client

(backup-archive) session because the server is currently disabled for client access.

System action

Server operation continues. Administrative clients are permitted access to the server.

User response

An authorized administrator must issue the ENABLE SESSION command before client nodes are permitted access to the server.

ANR04 21W Session session number for node node name (client platform) refused - sign-on protocol violation.

Explanation

The server refuses a request for a client session because sign-on protocol has been violated.

System action

Server operation continues.

User response

This error is usually the result of a client programming error in which the sign-on verb has been incorrectly formatted and delivered to the server. This error can also result when the server is contacted by an application that is not a part of this product.

ANR04 22W Session session number for node node name

(client platform) refused - node name not registered.

Explanation

The server refuses a request to start a client session because the client node name is not registered in the server database. On newer servers operating with newer clients, the client platform field contains the communication method and address.

System action

Server operation continues.

User response

Register the node name with the server before establishing a session. If the server is running with OPEN registration, no action is required; the client prompts the user for a password and registers the client with the server. If CLOSED registration is in effect on the server, an authorized administrator must use the REGISTER NODE command to register the client node name with the server.

ANR04 23W Session session number for administrator administrator ID (client platform) refused - administrator name not registered.

Explanation

The server refuses a request to start an administrative session because the administrator name is not registered in the server database.

System action

Server operation continues.

User response

Register the administrator name with the server before establishing a session. An authorized administrator must use the REGISTER ADMIN command to register the administrator with the server.

ANR04 24W Session session number for node node name (client platform) refused - invalid password submitted.

Explanation

The server refuses a request to start a client session because an invalid password has been submitted by the client during sign-on processing. The server will continue to deny access attempts by this client until a valid password is submitted. On newer servers operating with newer clients, the client platform field contains the communication method and address.

System action

Server operation continues.

User response

Enter the proper password. If the password has been forgotten by the user, an authorized administrator can assign a new password by using the UPDATE NODE command.

ANR04 25W *Session session number for node node name (client platform) refused - node password has expired.*

Explanation

The server refuses the specified session because the client node's password has expired.

System action

Server operation continues.

User response

Upon receipt of this error condition, the client program immediately reconnects to the server specifying a password update session and prompts the user for a new password. After the user enters a new password, the client reconnects to the server for normal operations. Alternatively, an authorized administrator can update the client password using the UPDATE NODE command.

ANR04 26W *Session session number for node node name*

(client platform) refused - open registration not permitted.

Explanation

The server refuses a client session because an open registration action has been attempted and the server is running with CLOSED registration.

System action

Server operation continues.

User response

Ask an authorized administrator to submit the request using the REGISTER NODE or REGISTER ADMIN command.

ANR04 27W *Session session number for node node name (client platform) refused - server version is down-level with this client.*

Explanation

The server refuses a client session because the client program version level is newer than that supported by the server program.

System action

Server operation continues.

User response

Apply service to the server program to make it compatible with the newer client program, or use an older client

program to contact the server.

ANR04 28W *Session session number for node node name (client platform) refused - client is down-level with this server version.*

Explanation

The server refuses the client session because the client program version level is older than that supported by the server program. For certain problems (such as the compression fix), once a node connects to the server using the newer client, the server records this fact and will not let this node back off this client version to a version that does not include the fix.

System action

Server operation continues.

User response

Apply service to the client program to make it compatible with the newer server program.

ANR04 29W *Session session number for node node name (client platform) refused - maximum server sessions (max sessions allowed) exceeded.*

Explanation

The server refuses the specified client or administrative session

because the maximum number of concurrent client sessions has been exceeded.

System action

Server operation continues.

User response

If necessary, increase the maximum number of permitted sessions. To do this, update the value for the MAXSESSIONS parameter in the server options file and restart the server with the updated options file. Note that increasing the MAXSESSIONS value requires additional memory resource by the server. You may want to retry the connection at a later time.

ANR04 30W *Session session number for node node name (client platform) refused - node name is locked.*

Explanation

The server refuses the specified client session because the node is locked from server access (with the LOCK NODE command or by the LDAP directory server).

System action

Server operations continue.

User response

Before the client node is permitted to access the server, a properly authorized administrator must unlock the

node. Nodes using LOCAL authentication can be unlocked with the UNLOCK NODE command. Nodes using LDAP authentication can be unlocked from within the LDAP directory server.

ANR04 Session session 31W number refused - administrator administrator ID (client platform) is locked.

Explanation

The server refuses the specified administrative session because the administrator is locked from server access (with the LOCK ADMIN command or by the LDAP directory server).

System action

Server operations continue.

User response

Before the administrator is permitted to access the server, a properly authorized administrator must unlock the administrator. Administrators using LOCAL authentication can be unlocked with the UNLOCK ADMIN command. Administrators using LDAP authentication can be unlocked from within the LDAP directory server.

ANR04 Session session 32W number for node node name (client platform) refused - insufficient memory.

Explanation

The server ends the specified session because sufficient memory (virtual memory) is not available.

System action

The server ends the session and continues operation.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR04 Session session 33W number for node or administrator ID (client platform) was refused because of insufficient recovery log space.

Explanation

If a log runs out of space, the current transaction is rolled back. The server issues an error message and halts. You cannot restart the server until the recovery log size is increased.

System action

The server halts.

User response

Monitor archive logs and active logs. If the recovery log space is insufficient, monitor the archive log space first. If the archive log space is full or nearly full, run a full database backup to remove archive logs and consider adding more

disk space to the archive log directory. If the archive log space is not full and the active log space is full or nearly full, update the value of the ACTIVELOGSIZE option in the dmserv.opt file. Set the value of the ACTIVELOGSIZE option to the new maximum size of the active log.

ANR04 Session session 34W number for node or administrator ID (client platform) was refused because of insufficient database space.

Explanation

The server ends the specified client or administrative session because of insufficient database space.

System action

The server ends the session, but continues operation.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command. Add one or more directories to the database.

ANR04 Session session 35W number for node node name (client platform) refused - internal error detected.

Explanation

The server ends the specified session because

an internal logic error is detected.

System action

The server ends the session and continues operation.

User response

To determine the source of the error, the administrator can examine server messages issued prior to this message. The QUERY ACTLOG command can be used to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR04 Command: 36E command invalid for current job state current job state.

Explanation

The server attempted to run the command, but it is not supported for the current state of the job. For example, the RESUME JOB command is only applicable for jobs that are in the SLEEPING state.

System action

None.

User response

Use the QUERY JOB command to determine the current state of the job. Only issue commands that are applicable for that state.

ANR04 Session session 37W number for node client node name

(client platform) encountered an internal server error while checking license compliance.

Explanation

The server encountered an internal error in determining if the server is in compliance with license terms.

System action

The client session is ended.

User response

Use the QUERY LICENSE and QUERY STATUS commands to determine if the server is in compliance with license terms. Start an AUDIT LICENSES process to readjust server license information. When this process completes you may restart the session. If the problem persists, contact your service representative.

ANR04 38W Session session number archive operation for client client node name (client platform) has been denied - Server is not in compliance with license terms.

Explanation

The server refuses a client archive operation because the current server configuration is not in compliance with license terms.

System action

Server operation continues. Clients may perform any action except backup or archive.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance.

ANR04 39W Session session number backup operation for client client node name (client platform) has been denied - Server is not in compliance with license terms.

Explanation

The server refuses a client backup operation because the current server configuration is not in compliance with license terms.

System action

Server operation continues. Clients may perform any action except backup or archive.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance.

ANR04 40W Protocol error on session session number for node client node name (client platform) - invalid verb header received.

Explanation

The server detects a protocol error on the specified session because an invalid verb header has been received from the client. Verb headers always precede communication sent to the server from the client or from the server to the client.

System action

The server ends the client session.

User response

Correct the programming error in the client program if it has been written by your installation using WDSF verbs. Otherwise, contact your service representative.

ANR04 41W Protocol error on session session number for node client node name (client platform) - invalid data length received.

Explanation

The server detects a protocol error on the specified session because an invalid verb length has been received from the client.

System action

The server ends the client session.

User response

Correct the programming error in the client program if it has

been written by your installation using WDSF verbs. Otherwise, contact your service representative.

ANR04 42W Protocol error on session session number for node client node name (client platform) - invalid stream mode switch.

Explanation

The server detects a protocol error on the specified session because the client has attempted an illegal stream operation.

System action

The server ends the client session.

User response

Correct the programming error in the client program if it has been written by your installation. Otherwise, contact your service representative.

ANR04 43W Protocol error on session session number for node client node name (client platform) - invalid "field name" field found in "verb name" verb (offset offset position).

Explanation

The server detects a protocol error on the specified session because an invalid field has been

found in a verb sent from the client node.

System action

The server ends the client session.

User response

Correct the programming error in the client program if it has been written by your installation using WDSF verbs. Otherwise, contact your service representative.

ANR04 44W Protocol error on session *session number* for node *client node name* (*client platform*) - out-of-sequence verb (*type verb name*) received.

Explanation

The server detects a protocol error on the specified session because a verb has been received that does not adhere to the client-server exchange sequence.

System action

The server ends the client session.

User response

If the client generating the error is not an API client, contact your service representative. If the client generating the error is an API client, contact the owner of the API client. If the client generating the error is a client that you have created using

WDSF verbs, correct the programming error in your client program.

ANR04 45W Protocol error on session *session number* for node *client node name* (*client platform*) - maximum group transaction size exceeded.

Explanation

The server detects a protocol error on the specified session because the client has attempted to group more than the maximum database update operations in a single database transaction.

System action

The server ends the client session.

User response

Correct the programming error in the client program if it has been written by your installation using WDSF verbs. Otherwise, contact your service representative.

ANR04 46W Session *session number* client *client node name* compression method unsupported - Compression forced OFF. Please obtain the latest level of the client code.

Explanation

The client is using a compression method that is no longer supported by the Server.

System action

Server operation continues. The client's backup operation continues, without compressing the data.

User response

The compression method used by the client is no longer supported. In order to use compression, the client needs to be upgraded to a client service level that supports the newer compression method.

ANR04 47W Session *session number* space management migration operation for client *client node name* (*client platform*) has been denied - Server is not in compliance with license terms.

Explanation

The server refuses a client space management migration operation because the current server configuration is not in compliance with license terms.

System action

Server operation continues. Clients may perform any action except backup, archive, or space-managed file migration.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance.

ANR04 48W Session *session number* space management migration operation for client *client node name* (*client platform*) has been denied - server is not licensed for space management support.

Explanation

The server refuses a client space management migration operation because the server is not licensed to support space-managed clients.

System action

Server operation continues.

User response

Licenses to support space-managed clients can be obtained from your service provider or re-seller. The REGISTER LICENSE command can be used with these licenses to enable space management support.

ANR04 49W Session *session number* space management migration operation for client *client node name* (*client platform*) is in violation of server license terms - server is

not licensed for space management support.

Explanation

The server warns about a client space management migration operation because the server is not licensed to support space-managed clients.

System action

Server operation continues.

User response

Licenses to support space-managed clients can be obtained from your service provider or re-seller. The REGISTER LICENSE command can be used with these licenses to enable space management support.

ANR04 50W *Session session number for server server name (client platform) refused - server name not defined for server to server communications*

Explanation

The server refuses a request to start a server session because the requesting server name is not defined in the server database, or the requesting server definition does not have a SERVERPASSWORD, or a password or node name is not setup for virtual

volume use on the source server.

System action

Server operation continues.

User response

Register the requesting server name with the server before establishing a session, or update the existing requesting server definition and set a SERVERPASSWORD. An authorized administrator must use the DEFINE SERVER or UPDATE SERVER command to register the requesting server and set the password. For a virtual volume environment, the source server must have a definition for the target server which includes a node name and password.

ANR04 51W *Session session number for server server name (server platform) refused - invalid password submitted.*

Explanation

The server refuses a request to start a server session because an invalid password has been submitted during sign-on processing. The server will continue to deny access attempts by that server until valid passwords are submitted.

System action

Server operation continues.

User response

Set the proper passwords. If the password has been changed on either server, an authorized administrator can set new passwords by using the UPDATE SERVER command with the SERVERPASSWORD parameter.

ANR04 52W *Session for server source server name refused. Server source server name is not defined for server-to-server communications on server target server name.*

Explanation

The server refuses a request to start a server-to-server session because a server name is not defined in the server database, or the server definition does not have a SERVERPASSWORD. Server-to-server communications that use the SERVERPASSWORD require that each server has a server definition for the other server.

System action

Server operation continues.

User response

Register the server names on both servers before establishing a session, or update the server's existing server definition and set a SERVERPASSWORD. An authorized administrator

must use the DEFINE SERVER or UPDATE SERVER command to register the servers and set the passwords.

ANR04 53W *Server to server session refused - no password defined.*

Explanation

The server to server session cannot be initiated because no server password has been defined for this server.

System action

Server operation continues.

User response

Define a server password with the SET SERVERPASSWORD command and retry the command.

ANR04 54E *Session rejected by server target server name, reason: rejection reason.*

Explanation

The server tried to open a session with the named server. The session was rejected for the indicated reason.

System action

The operation fails.

User response

Check both the servers for any additional messages that might further describe the reason the session was rejected. The rejection reason will be in the

form of "diagnostic code - reason". The diagnostic code is only intended for use by your service representative. The following responses apply to the specified rejection reasons.

- No Resource: Ensure that the receiving server is enabled and has sufficient database, log, and memory resource to support the server session.
 - Verifier expired: Ensure that the administrator's password is current on both servers.
 - Admin not registered: Ensure that the administrator is registered on the target server.
 - Inbound sessions disabled: Ensure that the target server has not disabled this server with the DISABLE SESSIONS SERVER command.
 - Down Level: Ensure that this server's level is current with respect to the target server's level.
 - Admin in use: Ensure that the administrator is not being updated on the target server.
 - Language not available: Ensure that required languages are installed on the target server.
 - Admin locked: Ensure that the administrator is not locked on either server.
 - License Failure: Ensure that appropriate licenses are registered.
 - Admin on client port: Use the UPDATE SERVER command to
- set the admin port for the target server.
 - SSL Required: Ensure that SSL is properly configured.
 - Authentication Failure: Ensure that all passwords have been set correctly on both servers. The password for the server (set by SET SERVERPASSWORD on server X) and the password in the server definition (set by DEFINE or UPDATE SERVER X SERVERPASSWORD=) are the same password.
 - Verification Failure: Use the QUERY SERVER command to determine that the HLADDRESS and LLADDRESS of the target server are correct. If they are not, correct them with the UPDATE SERVER command. If they are correct, resynchronize with the target server by issuing the UPDATE SERVER FORCESYNC=YES command.
 - Communication Failure: Ensure that the target server is available and that TCPIP is available on both servers. Use the QUERY SERVER command to determine that the HLADDRESS and LLADDRESS of the target server are correct. If they are not, correct them with the UPDATE SERVER command.
 - Node Type: Either the TYPE of the registered node on the target server is not SERVER or the NODENAME parameter of the server

definition on the source server is incorrect.

- Internal error: Use the messages on the target server to determine the problem.

ANR04 Invalid 55W Command *command name* for SNMP session.

Explanation

An SNMP administrative session attempted to run a command which is not an macro invocation. SNMP administrative sessions are only allowed to issue macro commands.

System action

The server ends the client session.

User response

Enter commands through the SNMP administrative interface which are macros defined on the server.

ANR04 Session rejected 56W for server *server name* - the *server name* at *High level address*, *Low level address* does not match.

Explanation

The server name at the address specified does not match the name in the server definition. The connection is not established.

System action

The server continues.

User response

Ensure the HLADDRESS and LLADDRESS in the define server command are correct, and that the servername on the server being contacted matches the name used in the DEFINE SERVER command.

ANR04 Session for 57W *server server name* refused - crossdefine is not allowed on this server.

Explanation

The server refuses a request to start a server to server session for crossdefine because it is not allowed on this server. The server will deny any sessions for crossdefine until crossdefine is allowed on this server. Storage Agents can also request server to server sessions when setting up to access libraries through library client servers or library servers.

System action

Server operation continues.

User response

An authorized administrator must use the SET CROSSDEFINE ON command to allow cross registration of servers.

ANR04 Server *server name* does not support access by the Storage Agent. 58S

Explanation

The storage agent attempted to contact a Database Server, but the server contacted was not at the correct level.

System action

The Storage Agent terminates.

User response

Specify a correct Database Server in the devconfig file for the Storage Agent.

ANR04 59W Authentication Protocol error on session *session number* for node *client node name (client platform)* - out-of-sequence verb (type *verb name*) received.

Explanation

The server detects a protocol error on the specified session because a verb has been received that does not adhere to the client-server authentication exchange sequence.

System action

The server ends the client session.

User response

If the client generating the error is not an API client, contact your service representative. If the client generating the error is an API client, contact the owner of the API client. If the client

generating the error is an IBM-provided client, please ensure that it is at the current software level.

ANR04 60W Open registration failed for session *session number* - node name *node name (client platform)* already exists.

Explanation

The server refuses a client session during open registration because the client has specified a node name that is already registered on the server.

System action

Server operation continues.

User response

The client program user must specify a different node name for the client in the client options file.

ANR04 61W Open registration failed for session *session number* for node *node name (client platform)* - policy domain STANDARD does not exist.

Explanation

The server refuses a client session during open registration because the STANDARD policy domain does not exist. All nodes added to the server database under open registration are automatically assigned to

the STANDARD policy domain. This policy domain must be defined and have an active policy set to support open registration.

System action

Server operation continues.

User response

If you want to support open registration, define a policy domain using the DEFINE DOMAIN command with the name STANDARD and activate a valid policy set in the domain. You can issue the UPDATE NODE command to move nodes to different policy domains after the nodes have registered themselves through open registration.

ANR04 62W Open registration failed for session *session number* for node *node name (client platform)* - invalid node name.

Explanation

The server refuses a client session during open registration because the node name specified by the client is not valid.

System action

Server operation continues.

User response

Specify a node name in the options file of the client program that contains valid characters

and does not exceed the maximum length in size.

ANR04 63W Open registration failed for session *session number* for node *node name (client platform)* - invalid password.

Explanation

The server refuses a client session during open registration because the password name specified by the user is not valid.

System action

Server operation continues.

User response

Specify a password that uses valid characters and is less than the maximum length in size.

ANR04 64W Open registration failed for session *session number* for node *node name (client platform)* - exceeded number of nodes available under license terms.

Explanation

The server detected an attempt to register more nodes than allowed by the terms of the current license.

System action

Server operation continues, but the REGISTER NODE

command fails, and the node is not registered.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance.

ANR04 65W Open registration failed for session *session number* for node *node name* (*client platform*) - policy domain **STANDARD** does not have an **ACTIVE** policy set.

Explanation

The server refuses a client session during open registration because the STANDARD policy domain does not have an active policy set. All nodes added to the server database under open registration are automatically assigned to the STANDARD policy domain. This policy domain must be defined and have an active policy set to support open registration.

System action

Server operation continues.

User response

If you want to support open registration, define a policy domain using the DEFINE DOMAIN command with the name STANDARD and activate a valid policy set in the domain. You can issue the UPDATE NODE command

to move nodes to different policy domains after the nodes have registered themselves through open registration.

ANR04 66E The **SETSTORAGESE RVER** command did not complete successfully.

Explanation

The SETSTORAGESE RVER command encountered an error and did not complete successfully.

System action

Storage agent operation terminates.

User response

Please review prior error messages and take the necessary corrective actions.

ANR04 67I The **SETSTORAGESE RVER** command completed successfully.

Explanation

The SETSTORAGESE RVER command has completed successfully, and the appropriate device configuration files have been updated.

System action

Storage agent operation terminates.

User response

None

ANR04 68E Server-to-server export and import not

allowed with server *server name*. Export server is at version *export version*; import server is at version *import version*.

Explanation

An attempt was made to export to an outdated server. The server on which the import is performed must be at the same or later level than the server from which the data was exported.

System action

The export operation ends and server operation continues.

User response

Export to a server that is at the same or later level.

ANR04 69W Session *session number* for node *node name* (*client platform*) refused - client is not configured for archive retention protection.

Explanation

The server refuses a client session because the client is not configured for archive retention protection.

System action

Server operation continues.

User response

Either disable archive retention protection on the server or configure the client for archive retention protection.

ANR04 70W Session *session number* for administrator *administrator name* refused - administrator password has expired.

Explanation

The server refuses the specified session because the administrator's password has expired.

System action

Server operation continues.

User response

Upon receipt of this error condition, the client program immediately reconnects to the server specifying a password update session and prompts the user for a new password. After the user enters a new password, the client reconnects to the server for normal operations. Alternatively, an authorized administrator can update the client password using the UPDATE ADMIN command.

ANR04 72E The database manager did not start. A tablespace container is inaccessible.

Explanation

The server was unable to start the database manager.

System action

The server halts.

User response

Before restarting the server, check the following items:

- Reboot the system.
- Check that the directories for dbdir, log, or devices exists and that the file system is mounted (if it is on a separate file system).
- Make sure that the hardware and network connection are working properly.
- Fix any errors in the system log or db2diag.log.

ANR04 Session session 73W number for administrator administrator ID (client platform) refused - administrator name does not have the correct level of authority over client node.

Explanation

The server refuses a request to start an administrative session because the administrator name does not have appropriate authority over the node.

System action

Server operation continues.

User response

Use command GRANT AUTHORITY to grant appropriate authority to the current administrator ID.

ANR04 Session session 74W number for administrator administrator ID (administrator platform) was refused because administrators are not allowed to initiate sessions on the client port.

Explanation

The server did not start the specified administrative session because the administrator connected to the server on the server port that is used for client sessions, and the option ADMINONCLIENTPORT is set to NO. When different port numbers are used for administrative and client sessions (controlled by the TCPPORT and TCPADMINPORT options), and option ADMINONCLIENTPORT is set to NO, administrative sessions can be started only on the port used for administrative sessions (as specified by the TCPADMINPORT option).

System action

Server operation continues.

User response

Update the client options file to specify the port to be used for

administrative sessions. This is typically specified by the TCPADMINPORT option in both client and server option files.

ANR04 Session session 75W number for node node name (client platform) refused - node is not allowed to initiate sessions on administrative port.

Explanation

The server had refused to start a session with the specified client node because the node connected to the server on the server's administrative port. When different port numbers are used for administrative and client sessions, client sessions may be started only on the port used for client sessions.

System action

Server operation continues.

User response

The client option file should be updated to specify the port to be used for client sessions. This is typically specified by TCPPORT option in both client and server option files. The MVS server also uses the ICSPOINT option.

ANR04 Session session 76W number for node node name (client platform) refused - node is not allowed to

initiate sessions.

Explanation

The server had refused to start a session with the specified client node because the node is not allowed to initiate session. Only server initiated sessions are allowed with this client. The SESSIONINIT parameter of the REGISTER NODE and UPDATE NODE commands control the ability of a client to initiate sessions.

System action

Server operation continues.

User response

An administrator can use the UPDATE NODE command with the SESSIONINIT parameter to specify that the client may initiate sessions. Alternatively, sessions can be scheduled with the client that are started by the server through server-prompted scheduling commands (DEFINE SCHEDULE, DEFINE ASSOCIATION).

ANR04 Session session 77W number refused - The client client node name cannot access the server with a platform type of client platform.

Explanation

A client with a invalid combination of node type and platform type has

requested a session with the server. For example, a node id of type NAS can only sign on with a platform type of "TSMNAS", all other node types cannot use this platform type.

System action

The session request is refused. The server operation continues.

User response

Verify that the Id used by a client to sign on has the proper platform type.

ANR04 78W Session request refused. Server is running in standalone mode.

Explanation

A client has requested a session with the server. The server is running in a mode in which it cannot start client sessions.

System action

The session request is refused. The server operation continues.

User response

No response is required. To reduce or disable the display of this message, you can update the server options before running in standalone mode with the COMMETHOD NONE option. This will allow the server to run without enabling client connections.

ANR04 79W Session session number for server server name (server

platform) terminated - connection with server severed.

Explanation

If server A has opened a connection with server B, server B's session is ended because the communications link has been closed by a network error or by server A's program.

System action

Server A continues operation.

User response

If server B halts operation or in some way stops communicating with server A, this message will be displayed on server A indicating that the connection was closed suddenly by server B. A network failure can also cause this message to be displayed. If a large number of these messages occur simultaneously, check the network for failure and correct any problems.

ANR04 80W Session session number for node node name (client platform) terminated - connection with client severed.

Explanation

The specified client session is ended because the communications link has been closed by a network error or by the client program.

System action

Server operation continues.

User response

If a user breaks out of a client program, this message will be displayed on the server as the connection is suddenly closed by the client. A network failure can also cause this message to be displayed. If a large number of these messages occur simultaneously, check the network for failure and correct any problems.

ANR04 81W Session session number for node node name (client platform) was terminated. The client did not respond within commtimeout seconds seconds.

Explanation

The server ends a client session because the client was holding database locks during a transaction. The client did not respond within the number of seconds specified by the COMMTIMEOUT server option.

System action

The server rolls back the transaction that was in progress and the session is ended. Server operation continues.

User response

If this message appears frequently, consider incrementing the value specified for the COMMTIMEOUT option. Use the SETOPT command to change the value of the COMMTIMEOUT option without stopping or restarting the server. This update changes the amount of time that the server waits for an expected client message during an operation that causes a database update.

ANR04 82W Session session number for node node name (client platform) terminated - idle for more than idletimeout minutes minutes.

Explanation

The server ends a client session because it has been idle for more minutes than specified in the IDLETIMEOUT parameter in the server options file. The client program will automatically attempt to reconnect to the server when necessary.

System action

Server operation continues.

User response

If the problems persists, increase the value specified for the IDLETIMEOUT parameter in the server options file and restart the server.

Many times, the client program is idle while waiting for the user to choose an action to perform (for example, backup, archive, restore, or retrieve files). If a user starts the client program and does not choose an action to perform, the session will eventually time out. The client program automatically reconnects to the server when the user chooses an action that requires server participation. Note that a large number of idle sessions can inadvertently prevent other users from connecting to the server, so care should be used when increasing the IDLETIMEOUT parameter.

ANR04 83W *Session session number for node node name (client platform) terminated - forced by administrator.*

Explanation

The server ends a client session in response to a CANCEL SESSION command issued by an authorized administrator.

System action

The server rolls back any transactions in progress for the terminated client session.

User response

None.

ANR04 84W *Session session number for node node name (client platform) terminated -*

protocol violation detected.

Explanation

The server ends the specified session because a communications protocol error by the client has been detected.

System action

The server ends the client session.

User response

Examine the client message to determine the problem. Correct the programming error in the client program. If the error cannot be isolated and resolved, contact your service representative.

If this session is a proxied LAN-Free session for a storage agent, this error may be the result of a mount point or volume preemption on the storage agent. Review the messages logged by the storage agent to determine if a storage agent action caused this to occur.

ANR04 85W *Session session number for node node name (client platform) terminated - sufficient memory is not available.*

Explanation

The server ends the specified session because sufficient memory (virtual memory) is not available.

System action

The server ends the session and continues operation.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR04 86W *Session session number for node node name (client platform) terminated - internal error detected.*

Explanation

The specified client session is ended by the server because an internal processing error has been detected on the server. A programming error may have occurred in the server program.

System action

The session is ended and server operation continues.

User response

If this session is a proxied LAN-Free session for a storage agent, this error may be the result of a mount point or volume preemption on the storage agent. Review the messages logged by the storage agent to determine if a storage agent action caused this to occur.

If the cause of the error can not be determined after reviewing the activity log, contact your service representative.

ANR04 87W *Session session number for node node name (client platform) terminated - preempted by another operation.*

Explanation

The server ends a client session in response to a cancel request issued by a higher priority operation that needed the mount point that the client was using.

System action

The server rolls back any transactions in progress for the terminated client session.

User response

Reissue the operation. If this message appears frequently, consider increasing the mountlimit value for the affected device class.

ANR04 88W *Session session number for node node name (client platform) terminated - transfer rate is less than (transfer rate) and more than (elapsed time since first data transfer) minutes have elapsed since first data transfer.*

Explanation

The server is canceling client session number *session number*. Depending on the state of

the session, it may take a while for the session to be canceled. The server ends a client session because it has been active for more minutes than specified in the THROUGHPUTTIMETHRESHOLD parameter in the server options file and the data transfer rate is less than the amount specified with the THROUGHPUTDATATHRESHOLD parameter in the server options file. The client is transferring data to the server at an abnormally slow rate and may have become a bottleneck for handling data from other clients. If the client has caused log records to be written, it is possible that this client will prevent log space reclamation.

System action

The session is canceled and server operation continues.

User response

If a low data transfer rate is not a problem, the THROUGHPUTTIMETHRESHOLD or THROUGHPUTDATATHRESHOLD parameters in the server options file can be set to zero - this will disable the throughput check. The change can be made without taking down the server and restarting it by using the SETOPT THROUGHPUTTIMETHRESHOLD or the SETOPT THROUGHPUTDATATHRESHOLD commands. If a low data transfer rate is not expected, external causes should be investigated. This would

include network problems and problems in accessing data on the client node. The client program may automatically reconnect to the server, so this message may appear on subsequent sessions until the data transfer problem is resolved. The default server operation is not to perform a throughput check.

ANR04 Session session 89W number refused for client node name - NAS type nodes are not supported by a storage agent.

Explanation

The specified client tried to connect to a storage agent. The storage agent does not support a node that is defined as TYPE=NAS.

System action

The session request is refused. The server operation continues.

User response

The client should be re-configured to not try LAN-free operations. This may be done by setting UPDATE NODE ENABLELANFREE=NO for the client.

ANR04 Canceling 90I session session number for node node name (client platform) .

Explanation

The server is canceling client session number *session number*. This message is displayed in response to the CANCEL SESSION command. Depending on the state of the session, it may take a while for the session to be canceled.

System action

The session is canceled and server operation continues.

User response

None.

ANR04 No matching 91I session(s) found to cancel.

Explanation

The server cannot find any sessions to cancel matching the specifications entered in the CANCEL SESSION command.

System action

Server operation continues.

User response

Use the QUERY SESSION command to ensure that the session you wish to cancel is connected. Reissue the command using the appropriate session number to cancel the client session.

ANR04 All drives in use. 92I Session session number for node node name (client platform) being preempted by

higher priority operation.

Explanation

When a high priority operation attempted to find an available drive, all the drives were being used. To free up a drive for this operation, the client session identified is being cancelled by the system.

System action

The lower priority client session is cancelled to free up a mount point (drive).

User response

When a drive again becomes available, restart the session that was cancelled. This session was most likely a backup/archive session and you may just want to let it restart automatically during its next scheduled backup window. If this message appears frequently, you may want to increase the number of drives available. See the MOUNTLIMIT parameter on the UPDATE DEVCLASS command.

ANR04 Restore session 93I session number canceled.

Explanation

The specified session was canceled with the CANCEL RESTORE command.

System action

The restore session is canceled and server operation continues.

User response

None.

ANR04 94I Volume *volume name* in use. Session *session number* for node *node name* (*client platform*) being preempted by higher priority operation.

Explanation

When a high priority operation attempted to acquire a specific volume, it was being used. To free the volume for this operation, the client session identified is being cancelled by the system.

System action

The lower priority client session is cancelled to free up the volume.

User response

Restart the session that was cancelled, it will wait until the higher priority operation if finished with the volume. This cancelled session was most likely a backup/archive session and you may just want to let it restart automatically during its next scheduled backup window.

ANR04 95I Cannot cancel the specified EXPORT/IMPORT session.

Explanation

The server cannot cancel the session specified in the CANCEL SESSION command.

System action

Server operation continues.

User response

Export/Import sessions cannot be canceled using CANCEL SESSION. The user should use the CANCEL PROCESS command to terminate the EXPORT/IMPORT operation.

ANR04 96E Session *session number* operation for client *client node name* (*client platform*) has been denied because verb (*type verb name*) is not allowed when archive retention is active.

Explanation

The server refuses the specified client operation because archive retention protection is active.

System action

Server operation continues.

User response

Do not send the specified operation to the server when archive retention protection is active.

ANR04 97W Session request refused from non-Express client.

Explanation

A non-Express client has requested a session with the Express server.

Only connections from an Express client will be accepted by an Express server.

System action

The session request is refused. The server operation continues.

User response

None.

ANR04 98W Session *session number* refused for client *node name* because restore DB is in progress.

Explanation

Restore DB is in progress, only connection from Client related to restore DB are allowed.

System action

The session request is refused. The server Restore DB operation continues.

User response

None.

ANR05 00W Transaction failed for session *session number* for node *node name* (*client platform*) - invalid password submitted.

Explanation

The server ends a password update transaction because the user has not correctly specified the current password.

System action

Server operation continues.

User response

Update your password by correctly specifying the current password. If the current password has been misplaced, the administrator can reassign a password for the client by using the UPDATE NODE or UPDATE ADMIN command.

ANR05 01W Transaction failed for session *session number* for node *node name* (*client platform*) - invalid policy binding specified.

Explanation

The server ends a database update transaction for the specified session because an invalid management class has been specified for a file or directory object.

System action

The specified session is ended and server operation continues.

User response

Correct the programming error in the client program if it has been written by your installation using WDSF verbs. Otherwise, contact your service representative.

ANR05 02E Transaction failed for session *session*

*number for node
node name
(client platform)
- A storage pool
for the target
destination is
associated with
a device class
that has a
Centra device
type.*

Explanation

The server ends a database update transaction for the specified session because an invalid management class has been specified. Centra device types may be used only for archive objects.

System action

The specified session is ended and server operation continues.

User response

Ensure that Centra device types are associated with device classes that are used only for archive operations. The UPDATE COPYGRP command can be used to update copy groups associated with space management and/or backup storage pools so that they point to valid destinations.

ANR05 03I *Session session number for administrator administrator name logged in as node node name restored or retrieved object type object: node node name, filesystem*

*filesystem name,
object object
name, version
version of total
version.*

Explanation

This message logs information about an object that was restored or retrieved by an administrator logged in for a node.

System action

Server operation continues.

User response

None.

ANR05 04I *Session session number for node node name(Userid=userid), restored or retrieved object type object: node node name filesystem filesystem name, object object name, version version of total version.*

Explanation

This message logs information to the activity log about an object that was restored or retrieved by a user logged in for a node. A user ID with no value indicates that an administrative or root user on the platform initiated the restore.

System action

Server operation continues.

User response

None.

ANR05 05E *The database manager encountered a null value for column name during the data fetching.*

Explanation

The server received an unexpected data value.

System action

The server cannot process the command.

User response

Before reissuing the command, try the following actions:

- Reboot the system.
- Check that the directories for dbdir, log, or devices exists and that the file system is mounted (if it is on a separate file system).
- Make sure that the hardware and network connection are working properly.
- Fix any errors in the system log or db2diag.log.

ANR05 06I *A full backup has been started for database DB Alias. This backup is required.*

Explanation

This level of the IBM Storage Protect server uses a new version of the database manager that has a new format

for log files. Database backups created prior to this level of the server cannot be used to restore the database. A new database backup image is needed to ensure that the database is protected.

System action

A full database backup is started.

User response

None.

ANR05 07E *Protocol error on session session number for node client node name (client platform) because an owner was not properly provided for the indicated node.*

Explanation

The session does not adhere to the client-server exchange sequence, therefore the server detected a protocol error on the specified session.

System action

The server ends the client session.

User response

If the client runs in a non-standard environment, the server detects that the owner field is not being sent properly. It is not recommended to run the client in a non-standard environment.

ANR05 08E *An automatic full database backup for*

**database DB
Alias has failed.**

Explanation

A full database backup failed. This message always accompanies one or more other message that provides more details about the error.

System action

The server operation continues.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages.

ANR05 09E The database restore failed on DB Alias due to the log format differences between database manager versions.

Explanation

The database restore failed because the backup image was produced by a previous version of the database manager.

System action

The database restore terminates.

User response

If you need to restore the database immediately, uninstall the upgraded

server, re-install the previous version of the server, then run the restore command. Otherwise, start the upgraded server. The upgraded server creates a new backup image automatically. After the database backup completes, run the server restore utility again.

ANR05 10I Session session number opened input volume volume name.

Explanation

The indicated session has opened the specified volume for input processing.

System action

Processing continues.

User response

None.

ANR05 11I Session session number opened output volume volume name.

Explanation

The indicated session has opened the specified volume for output processing.

System action

Processing continues.

User response

None.

ANR05 12I Process process number opened input volume volume name.

Explanation

The indicated process has opened the specified volume for input processing. You may or may not see an associated ANR0515I message for this process/volume combination, since some volumes are shared between multiple processes.

System action

Processing continues.

User response

None.

ANR05 13I Process process number opened output volume volume name.

Explanation

The indicated process has opened the specified volume for output processing. You may not see an associated ANR0515I message for this process/volume combination, since some volumes are shared between multiple processes.

System action

Processing continues.

User response

None.

ANR05 14I Session session number closed volume volume name.

Explanation

The indicated session has finished using the specified volume.

System action

Processing continues.

User response

None.

ANR05 15I Process process number closed volume volume name.

Explanation

The indicated process has finished using the specified volume. It is possible that the process indicated was not the process that opened the volume.

System action

Processing continues.

User response

None.

ANR05 16E SQL processing for statement statement failed.

Explanation

The indicated select statement failed. The failure was caused by a syntax error with the statement itself.

System action

The select statement failed.

User response

Review the server activity log for message ANR0162W for an explanation of the error that caused this statement to fail.

ANR05 17E *command: The DEDUPLICATION parameter cannot be used with either the TYPE=SERVER or TYPE=NAS parameter.*

System action

The command failed.

User response

Reissue the command without the DEDUPLICATION parameter.

ANR05 18W *NDMP restore failed for session session number for node node name (client platform), file space file space.*

Explanation

The server ends a restore operation for the specified NAS node because an error has been encountered on the server. Some common reasons for the error are:

- The input volume is unavailable
- The storage pool is unavailable
- Data is corrupted on the input volume
- Hardware or media failure has occurred
- The server database is corrupted

System action

The server ends the restore operation.

User response

Examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct any problem and try the restore again. If the data is also backed up in a copy storage pool, the retry operation will attempt to read the file from the alternate location. If retry of the restore operation continues to fail contact your service representative.

ANR05 19E *A retrieve or restore operation failed for session session number for node node name (client platform). An invalid partial object request was received.*

Explanation

The server ended a file retrieve or restore operation for the specified session because an invalid value for the offset, length, or both was received from the client application for the object being retrieved or restored.

System action

The server ends the specified operation and server operation continues.

User response

Specify an offset, length, or both within the bounds

of the object to be retrieved or restored, and rerun the application.

ANR05 20W *Transaction failed for session session number for node node name (client platform) - storage pool pool name is not defined.*

Explanation

The server rolls back a database update transaction for the specified session because the destination specified for a management class copy group specifies the named storage pool, but that storage pool does not exist.

System action

Server operation continues.

User response

An administrator with policy authority over the client policy domain must correct management class definitions so that copy group destinations refer to defined storage pools, or the specified storage pool must be created by an authorized administrator.

ANR05 21W *Transaction failed for session session number for node node name (client platform) - object excluded by size in storage pool pool name and all successor pools.*

Explanation

The server ends a database update transaction for the specified session because the size of a file sent from the client node is larger than that allowed in the storage pool specified in the client's management class copy group. No successor storage pools to the one specified on the copy group can accept the large file.

System action

The specified session is ended and server operation continues.

User response

If the client is not using compression to send files to the host, turn compression on for the client (using the UPDATE NODE command) to try and resolve the problem. Otherwise, the maximum file size for one or more of the storage pools in the storage hierarchy can be increased to accommodate the file. An authorized administrator can increase the MAXSIZE parameter by issuing the UPDATE STGPPOOL command.

ANR05 22W *Transaction failed for session session number for node node name (client platform) - no space available in storage pool pool name and all successor pools.*

Explanation

The server ends a database update transaction for the specified session because the storage pool specified in the client's management class copy group does not contain enough free space to hold the files sent from the client. Successor storage pools to the one specified on the copy group do not contain enough free space.

System action

The specified session is ended and server operation continues.

User response

An authorized administrator can add storage to one or more storage pools in the storage hierarchy. Ensure that you size the file system based on the amount of data that you manage. Add storage space by using operating system tools. On the UPDATE STGPOOL command, specify the ACCESS parameter as READWRITE to ensure that client nodes and server processes can read and write to the storage pool.

ANR05 Transaction 23W failed for session *session number* for node *node name* (client platform) - error on output storage device.

Explanation

The server ends a database update transaction for the specified client because an I/O error has been encountered by the server in writing to a device.

System action

The specified session is ended and server operation continues.

User response

Query the activity log to find messages preceding this one that specify the failing device. Storage pool volumes can be varied offline (by using the VARY command), or the server may need to be halted to correct the hardware problem. After the problem is corrected, the client should retry the operation.

ANR05 Transaction 24W failed for session *session number* for node *node name* (client platform) - data transfer interrupted.

Explanation

The database transaction associated with session *session number* was aborted because data transfer to or from data storage was interrupted by an external event.

System action

The session is canceled and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Attempt the client operation again if the problem can be resolved.

ANR05 Transaction 25W failed for session *session number* for node *node name* (client platform) - storage media inaccessible.

Explanation

The server ends a transaction for the specified session because storage volumes are not available in the storage pools in which the client's files are to be stored.

System action

The server ends the specified session and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available to client nodes for file storage.

ANR05 A transaction 26W failed for session *session number* for node *node name*

(client platform) because of insufficient recovery log space.

Explanation

If a log runs out of space, the current transaction is rolled back. The server issues an error message and halts. You cannot restart the server until the recovery log size is increased.

System action

The server halts.

User response

Monitor archive logs and active logs. If the recovery log space is insufficient, monitor the archive log space first. If the archive log space is full or nearly full, run a full database backup to remove archive logs and consider adding more disk space to the archive log directory. If the archive log space is not full and the active log space is full or nearly full, update the value of the ACTIVELOGSIZE option in the dsmserv.opt file. Set the value of the ACTIVELOGSIZE option to the new maximum size of the active log.

ANR05 A transaction 27W failed for session *session number* for node *node name* (client platform) because of insufficient database space.

Explanation

The server ends a database update transaction for the specified session because the server has insufficient database space.

System action

The server ends the specified session, but server operation continues.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command. Add one or more directories to the database.

ANR05 Transaction 28W failed for session *session number* for node *node name* (client platform) - thread resource not available.

Explanation

The server ends a database update transaction for the specified session because sufficient memory is not available for starting additional processes on the server.

System action

The server ends the specified session and server operation continues.

User response

See the documentation for the operating

system about how to increase memory for an application.

ANR05 Transaction 29W failed for session *session number* for node *node name* (client platform) - insufficient memory.

Explanation

The server ends a database update transaction for the specified session because sufficient memory is not available on the server.

System action

The server ends the specified session and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR05 Transaction 30W failed for session *session number* for node *node name* (client platform) - internal server error detected.

Explanation

The server ends a database update transaction for the specified session because an internal logic error is detected.

System action

The server ends the specified session

and server operation continues.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages that indicate the source of the error.

ANR05 Transaction 31W failed for session *session number* for node *node name* (client platform) - invalid file space identifier specified by client.

Explanation

The server ends a database update transaction for the specified session because the file space identified by the client for the transaction does not exist.

System action

This action usually occurs when a client is operating on a file space that is currently being deleted as a result of an administrative command or client action. The server ends the specified session and server operation continues.

User response

Use the QUERY PROCESS command to monitor and wait for any file space deletion processes to complete, or cancel the

process if you do not want to delete the file space. Try the client action again after this action has been taken.

ANR05 Diagnostic(ID): 32W Transaction *transaction ID* was aborted for session *session number* for node *node name* (client platform).

Explanation

An error has been detected during a transaction commit for the specified session. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR05 Transaction 33W failed for session *session number* - compression method used by client not supported. Please obtain the latest level of the client code.

Explanation

The server ends the transaction for the specified session because the compression method that is used by the client is no longer supported by the server.

System action

The server ends the specified session and server operation continues.

User response

The client must either backup the data with compression turned off, or upgrade to a client that supports the newer compression method. If the client is a WDSF client, upgrade to a non-WDSF client in order to use the compression performed by the client.

ANR05 Transaction 34W failed for session *session number* for node *node name* (client platform) - size estimate exceeded and server is unable to obtain additional space in storage pool *pool name*. Size estimate was *size estimate*.

Explanation

The server ends a database update transaction for the specified session because the size estimate provided by the client is too small. The server has attempted to obtain additional space in the

indicated storage pool, but was unable to do so.

System action

The specified session is ended and server operation continues.

If *pool name* is a random access storage pool with caching enabled, it is also possible that additional space can be made available in this storage pool by eliminating cached files. When the server allocates space based on the size estimate provided by the client, it frees space occupied by cached files if this space is needed to obtain the estimated space. However, if the server later determines that the file size estimate was too low, it attempts to obtain additional space that is not utilized, but does not delete cached files to do so.

If the client sending the data has the option COMPRESSALWAYS YES set, it is possible that a file grew during the compression operation and when the client sent it to the server it exceeded the space available in storage pool *pool name*.

User response

This message may indicate that there is no additional space in *pool name*. The following are possible circumventions:

An authorized administrator can issue the DEFINE VOLUME command to add storage to this pool.

If the suspected cause of the failure is that *pool name* is a DISK storage pool and that space in use by cached files was not freed, turn off caching for the storage pool and issue the MOVE DATA command for the volumes in pool *pool name*.

If the suspected cause of the failure is that a file grew in size during compression on the client, another possible circumvention is to set the COMPRESSALWAYS option in the client options file to NO and retry the operation. This may allow the client to accurately report the file size and possibly avoid the out of space condition in the storage pool.

ANR05 Transaction 35W failed for session *session number* for node *node name* (client platform) - insufficient mount points available to satisfy the request.

Explanation

The server was unable to allocate sufficient mount points to process the transaction.

System action

The operation is ended and server operation continues.

User response

If necessary, make more mount points available or validate your device class and library configuration.

ANR05 Transaction 36W failed for session *session number* for node *node name* (client platform) - down-level client does not support format of stored files.

Explanation

A client attempts to perform an operation involving files that are stored in a format that is not supported by that client level.

System action

The operation is ended and server operation continues.

User response

Upgrade the client to a later level.

ANR05 Transaction 37E failed for session *session number* for node *node name* (client platform) - filespace name cannot be renamed from or to a Unicode name.

Explanation

The server ends a database update transaction for the specified session because a file space was attempted to be renamed to or from unicode.

System action

The server ends the specified transaction

and server operation continues.

User response

Do not attempt to rename a unicode file space to a non-unicode name or a non-unicode file space to a unicode name.

**ANR05 A resource
38I waiter has been
aborted.**

Explanation

The server aborts a resource wait because of waiting too long for a resource to become available. This could cause a process or session to fail. If this causes a process or a session to fail then there will be other messages at this time indicating which process or session has failed. Resources are internal server resources such as locks and synchronization objects.

System action

The server terminates the resource with request and server operation continues.

User response

Either a server deadlock situation has occurred or the resource timeout value is set too low. Check the setting for the RESOURCETimeout server option and increase the value. If the problem persists with a higher timeout then contact your service representative.

**ANR05 Transaction
39W failed for**

**session session
number for node
node name. This
node has
exceeded its
maximum
number of
mount points.**

Explanation

The server ends the transaction because the node requires mount points to store data, and either the node is not allowed to acquire any mount points, or the node is already using the maximum number of mount points allowed for the node. The maximum number of mount points a node is allowed to use on the server is controlled by the setting of the MAXNUMMP parameter on the REGISTER NODE or UPDATE NODE command.

System action

The server ends the specified session and server operation continues.

User response

If the number of mount points that the node is allowed to use on the server are already acquired, reduce the number of client sessions for the specified node that are running concurrently. For example, decrease the value of the client option RESOURCEUTILIZATION. If sufficient mount points (for example, drives) are available to satisfy the data store operations, issue the UPDATE NODE command to increase the

value of the MAXNUMMP parameter.

If the node is not allowed to acquire any mount points (the node's MAXNUMMP option is set to zero), issue the UPDATE NODE command to change the value of the MAXNUMMP parameter.

**ANR05 Retrieve or
40W restore failed
for session
session number
for node node
name (client
platform) - data
integrity error
detected.**

Explanation

The server ends a file retrieval operation for the specified session because an internal database integrity error has been encountered on the server.

System action

The server ends the specified session and continues operation.

User response

Contact your service representative.

**ANR05 Retrieve or
41W restore failed
for session
session number
for node node
name (client
platform) - error
on input storage
device.**

Explanation

The server ends a client retrieval or restore operation for the specified session

because an I/O error has been encountered by the server in reading from a device.

System action

The server ends the specified session and server operation continues.

User response

Query the activity log to find messages preceding this one that specify the device that is failing. Storage pool volumes can be varied offline (by using the VARY OFFLINE command), or the server may need to be shut down by using the HALT command to correct the hardware problem. After the problem is corrected, the client may try the operation again.

**ANR05 Retrieve or
42W restore failed
for session
session number
for node node
name (client
platform) -
storage media
inaccessible.**

Explanation

The server ends a client retrieval or restore operation for the specified session because a needed storage pool volume has been varied offline or the storage pool is unavailable.

System action

The server ends the specified session and server operation continues.

User response

Use the VARY ONLINE command to vary offline storage volumes online in the storage hierarchy and make them available to client nodes for file storage. If all volumes are online, check the ACCESS parameter of the storage pool. If the access mode is UNAVAILABLE, use the UPDATE STGPOOL command to update it to READONLY or READWRITE.

ANR05 43W Retrieve or restore failed for session *session number* for node *node name (client platform)* - data transfer interrupted.

Explanation

The database transaction associated with session *session number* was aborted because data transfer to or from data storage was interrupted by an external event.

System action

The session is canceled and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Attempt the client operation again, if the problem can be resolved.

ANR05 44W Retrieve or restore failed for session *session number*

for node *node name (client platform)* - thread resource not available.

Explanation

The server ends a file retrieval or restore operation for the specified session because sufficient memory is not available for starting additional processes on the server.

System action

The server ends the specified session and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR05 45W Retrieve or restore failed for session *session number* for node *node name (client platform)* - insufficient memory.

Explanation

The server ends a file retrieval or restore operation for the specified session because sufficient memory is not available on the server.

System action

The server ends the specified session and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR05 46W Retrieve or restore failed for session *session number* for node *node name (client platform)* - internal server error detected.

Explanation

The server ends a file retrieval or restore operation for the specified session because an internal logic error is detected in the server program.

System action

The server ends the specified session and continues operation.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR05 47E Invalid data was encountered in the command processor output stream: output formatting terminated for the last

command entered.

Explanation

The server console session encounters an error in formatting output from a command.

System action

The command output is discarded and server operation continues.

User response

Use the server QUERY command to determine if the command you entered had the desired affect in the server. Use the QUERY ACTLOG command to see if a server error condition (like out of memory) occurred prior to the command. Resolve the error if it is found. Contact your service representative if you cannot resolve the error, or if an error is not found.

ANR05 48W Retrieve or restore failed for session *session number* for node *node name (client platform)* processing file space *filespace (fsId filespace id)* for file *file name* stored as *storage repository* - error detected.

Explanation

The server ends a file retrieval operation for the specified session because an error has been encountered on the

server. Some common reasons for the error are:

- The input volume is unavailable
- The storage pool is unavailable
- Data is corrupted on the input volume
- Hardware or media failure has occurred
- Database corruption

System action

The server ends the specified session and continues operation.

User response

Try the restore or retrieve operation again, and if the file is also backed up in a copy storage pool, the operation will attempt to read the file from the alternate location. If retry of the restore or retrieve operation continues to fail examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the problem and try the restore or retrieve again.

ANR05 Transaction 49W failed for session *session number* for node *node name* (client platform) - no existing restore session found.

Explanation

A client attempted to start an additional no query restore session

to increase restore throughput, but the original restore session was not found.

System action

The operation is ended and server operation continues.

User response

Check the status of the original restore. It may have already completed or been cancelled. The QUERY SESSION command and the QUERY RESTORE commands can provide information about existing sessions and restore sessions which are restartable.

ANR05 The client 50E operation failed for session *session number* for node *node name* (client platform) - see previous error messages.

Explanation

The indicated operation has failed. This message is always preceded by one or more other error messages which provide more detail about why the command failed.

System action

The operation is ended and server operation continues.

User response

Examine the previous error messages to determine the source of the error. Use the QUERY ACTLOG command to

view the activity log and search for messages if needed. Correct the problem and try the command again.

ANR05 The client 51E operation failed for session *session number* for node *node name* on the (client platform) operating system because of a lock conflict.

Explanation

An operation that requires the server to lock a system resource has been initiated. The operation cannot be completed because the resource is in use by another command or process.

System action

Server operations continue, but the server does not process the command.

User response

To resolve the issue, take one of the following actions: - If the failed command was run in a local area network (LAN) environment, run the command again later. - If the failed command was run in a LAN-free environment, run the VALIDATE LANFREE command and review the output: If the LAN-Free capable column displays a value of YES, retry the failed command. If the LAN-Free capable column displays a value of NO, correct the configuration

to support LAN-free data movement for the storage agent and retry the failed command. Alternatively, retry the failed command in a LAN environment.

ANR05 Client operation 52E failed for session *session number* for node *node name* (client platform) - destination storage pool *storage pool* was skipped.

Explanation

The indicated client operation failed because the destination storage pool was skipped. A storage pool may be skipped because it does not have enough available space, or because it has a MAXSIZE value that is less than the size of the object to be inserted.

System action

The operation fails.

User response

Ensure that the destination storage pool is available, has an adequate MAXSIZE setting, and has adequate space. The MAXSIZE setting may be changed using the UPDATE STGPOOL command. Space may be added to the storage pool by checking in scratch volumes or defining new volumes in the storage pool. If volumes in the destination storage pool are offline, use the VARY ONLINE command to vary them online and make them available for use.

Correct the problem and try the command again.

**ANR05 Client operation
53E failed for session
session number -
administrator
administrator
name does not
have adequate
authority over
node node
name.**

Explanation

The specified administrator does not have the proper authority necessary to perform this operation on the specified node.

System action

The server does not perform the query.

User response

Issue the command from a properly authorized administrator ID, or contact the system administrator to have additional authority granted to the current administrator ID.

**ANR05 command name:
54E The parameter
name parameter
is only valid if
the TOSERVER
parameter is
specified.**

Explanation

The command failed because the TOSERVER parameter was not specified.

System action

The command fails and server operation continues.

User response

Reissue the command and specify the TOSERVER parameter.

**ANR05 command name:
55E The parameter
name parameter
cannot be
specified when
the TOSERVER
parameter is
specified.**

Explanation

The command failed because the TOSERVER parameter was not specified.

System action

The command fails and server operation continues.

User response

Reissue the command and omit the TOSERVER parameter.

**ANR05 command name:
56E DATES=RELATI
VE parameter
value cannot be
specified when
merging
imported files
using the
MERGE=YES
parameter
value.**

Explanation

When importing files and merging them into existing file spaces, the DATES=RELATIVE

parameter value cannot be specified.

System action

The command fails and server operation continues.

User response

Reissue the command and omit the DATES=RELATIVE parameter.

**ANR05 Import
57I command: An
invalid export
record (version
version, copy
type copy type,
object type
object type) was
found.**

Explanation

An invalid import record was found for the specified version, copy type and object type. The object will be skipped, and import processing will continue.

System action

Server operation continues.

User response

Issue QUERY ACTLOG to determine the source of the error.

**ANR05 Import
58W processing did
not create a
proxynode
association for
nodes
node_id_target
and
node_id_agent.**

Explanation

Import processing did not create a proxynode association between the two nodes. The association fails if either of the nodes does not exist on the server, or if import processing was not allowed to complete.

System action

The server does not create the specified proxynode association.

User response

Verify that both nodes were imported properly and issue the import command again. Or, use the GRANT PROXYNODE command to manually create the proxynode association.

**ANR05 Too many
59E domains are
specified on the
EXPORT NODE
command.**

Explanation

The maximum length of the domain list cannot exceed approximately 1400 characters.

System action

The EXPORT command is ended.

User response

If you specified DOMAIN=* on the command, issue the command again without specifying the domain to let it default to all domains. If you specified a domain list, then split up the

EXPORT into multiple export commands to reduce the number of domains specified on the command.

**ANR05 Import
60E command:
Unable to
decrypt
encrypted
password or
key.**

Explanation

The server is not able to decrypt the password associated with a node or administrator, or the client encryption key associated with an object being imported. The password or key was encrypted with the AES encryption standard, but the server does not support AES.

System action

The object is not imported.

User response

Rerun the export command, specifying the ENCrptionstrength=DES option. Or, rerun the import on a server that supports AES.

**ANR05 Export
61E command:
Process aborted
- sign on to
server, target
server name,
failed.**

Explanation

The server export process encountered an error in establishing a communication session with the target server.

System action

The export process ends and server operation continues.

User response

Check the activity log and server console for messages that indicate a failure or problem on the server issuing this command and on the target server. Next, check the server definition, administrator name, and password on both the server issuing the command and the server specified. Also, check the communication connection between the two servers. And finally, verify that the target server specified is running. If the problem is not resolved, contact your service representative.

**ANR05 Export
62I command: Data
transfer
complete,
deleting
temporary data.**

Explanation

The server export process has completed writing data to the target media or server. Temporary data used during the operation is now being deleted from the database.

System action

The export process continues until all temporary data is removed.

User response

None.

**ANR05 NDMP restore
63W failed for node
node name, file
space filespace.**

Explanation

The server ends a restore operation for the specified NAS node because an error has been encountered on the server. Some common reasons for the error are:

- The input volume is unavailable
- The storage pool is unavailable
- Data is corrupted on the input volume
- Hardware or media failure has occurred
- The server database is corrupted

System action

The server ends the restore operation.

User response

Examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct any problem and try the restore again. If the data is also backed up in a copy storage pool, the retry operation will attempt to read the file from the alternate location. If retry of the restore operation continues to fail contact your service representative.

**ANR05 Restartable
64E restore request
failed for
session session**

**number,
restartable
restore session
restore session
number -
sessions are
active from the
original restore.**

Explanation

A client attempted to restart a restartable no query restore session; However, sessions from the original no query restore invocation are still active. Both the current and restartable restore session numbers are shown.

System action

The restartable restore request is ended and server operation continues. The restore's restartability status does not change.

User response

Check the status of the original restore. The QUERY RESTORE command can be used to show the status of restartable restores. The restartable restore session number is the one for which sessions were found to be running. Sessions may be active on either the server or a storage agent. Restartable restores may be cancelled by issuing the CANCEL RESTORE command, after which the restore may be retried. Once CANCEL RESTORE is issued for a restore session, it is not eligible to be restarted.

**ANR05 Retrieve or
65W restore failed**

for session
session number
for node *node*
name (client
platform). The
storage volume
volume name is
inaccessible.

Explanation

The server ends a client retrieval or restore operation for the specified session because a needed storage pool volume has been varied offline.

System action

The server ends the specified session and server operation continues.

User response

Use the VARY ONLINE command to vary offline storage volumes online, and make them available to client nodes for file storage.

ANR05 66W Retrieve or restore failed for session *session number* for node *node name (client platform)* - file was deleted from data storage during retrieval.

Explanation

The server ends a file retrieval operation for the specified session because the file has been deleted from data storage by another process before retrieval is complete.

System action

The server ends the specified session and continues operation.

User response

Contact your administrator to find out if DELETE FILESPACE, DELETE VOLUME, or inventory expiration processes are running; these processes can delete data storage files during retrieval. Reissue the restore or retrieve operation and specify a different file version.

ANR05 67W Retrieve or restored failed for session *session number* for node *node name (client platform)* - insufficient mount points available to satisfy the request.

Explanation

The server was unable to allocate sufficient mount points to process the retrieve or restore operation.

System action

The operation is ended and server operation continues.

User response

If necessary, make more mount points available.

ANR05 68W Session *session number* for admin *admin name (client platform)* terminated -

connection with
client severed.

Explanation

The specified admin session is ended because the communications link has been closed by a network error or by the client program.

System action

Server operation continues.

User response

If a user breaks out of a client program, this message will be displayed on the server as the connection is suddenly closed by the client. A network failure can also cause this message to be displayed. If a large number of these messages occur simultaneously, check the network for failure and correct any problems.

ANR05 69I Object not processed for *node name*: *type=type, file space=filesystem name, object=object name*.

Explanation

An error occurred. The object for *node name*, identified by *type, file space* and *object name* was not processed.

System action

Server action is defined by the error that occurred.

User response

Issue QUERY ACTLOG to determine the source of the error.

ANR05 70E Export *command*: Invalid value for DURUNITS parameter detected while exporting administrative schedule *schedule name* - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the DURUNITS parameter for administrative schedule *schedule name*.

System action

Export processing continues, but the exported data contains an unknown DURUNITS value for this schedule. If this data is imported, the server uses the default or existing DURUNITS value.

User response

Update the DURUNITS value for this schedule and restart the export command. Alternatively, the export data with the unknown value can be used, and the DURUNITS value can be checked and updated after import processing has been performed.

ANR05 71E Export *command*: Invalid value for

PERUNITS parameter detected while exporting administrative schedule <i>schedule name</i> - default or existing value is used during import.	<p>used during import.</p> <p>Explanation</p> <p>During processing of command <i>export command</i>, an invalid value is encountered for the DAYOFWEEK parameter for administrative schedule <i>schedule name</i>.</p>	<p>System action</p> <p>Export or import processing for the command continues.</p> <p>User response</p> <p>None.</p>	<p>DAYOFWEEK parameter in exported data for administrative schedule <i>schedule name</i>.</p>
<p>Explanation</p> <p>During processing of command <i>export command</i>, an invalid value is encountered for the PERUNITS parameter for administrative schedule <i>schedule name</i>.</p>	<p>System action</p> <p>Export processing continues, but the exported data contains an unknown DAYOFWEEK value for this schedule. If this data is imported, the server uses the default or existing DAYOFWEEK value.</p>	<hr/> <p>ANR05 Import 74E command: Invalid value for DURUNITS or PERUNITS parameter in exported data for administrative schedule <i>schedule name</i>.</p>	<p>Explanation</p> <p>During preview processing of command <i>import command</i>, an invalid value is encountered for the DAYOFWEEK parameter for administrative schedule <i>schedule name</i>.</p>
<p>System action</p> <p>Export processing continues, but the exported data will contain an unknown PERUNITS value for this schedule. If this data is imported, the server uses the default or existing PERUNITS value.</p>	<p>User response</p> <p>Update the DAYOFWEEK value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the DAYOFWEEK value after import processing has been performed.</p>	<p>Explanation</p> <p>During preview processing of command <i>import command</i>, an invalid value is encountered for the DURUNITS or PERUNITS parameter for administrative schedule <i>schedule name</i>.</p>	<p>System action</p> <p>Processing of the command continues. If a later command is issued that causes the data to be imported, the default or existing DAYOFWEEK value is used.</p>
<p>User response</p> <p>Update the PERUNITS value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the PERUNITS value after import processing has been performed.</p>	<hr/> <p>ANR05 Export/import 73I command: Processing administrative schedule <i>schedule name</i>.</p>	<p>System action</p> <p>Processing of the command continues. If a later command is issued that causes the data to be imported, the default or existing values are used for DURATION, DURUNITS, PERIOD, and PERUNITS.</p>	<p>User response</p> <p>If the data is imported with a later command, verify that the correct DAYOFWEEK value is used for this schedule.</p>
<hr/> <p>ANR05 Export 72E command: Invalid value for DAYOFWEEK parameter detected while exporting administrative schedule <i>schedule name</i> - default or existing value is</p>	<p>Explanation</p> <p>The background export or import process to service the command <i>export/import command</i> is currently processing the schedule definition information for administrative schedule <i>schedule name</i>.</p>	<p>User response</p> <p>If the data is imported with a later command, verify that the correct values for DURATION, DURUNITS, PERIOD, and PERUNITS are used for this schedule.</p> <hr/> <p>ANR05 Import 75E command: Invalid value for</p>	<hr/> <p>ANR05 Import 76E command: Invalid value for DURUNITS or PERUNITS parameter in exported data - administrative schedule <i>schedule name</i> defined with default values for DURATION, DURUNITS, PERIOD, and PERUNITS.</p> <p>Explanation</p> <p>During processing of command <i>import</i></p>

command, an invalid value is encountered for the DURUNITS or PERUNITS parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the default values for DURATION, DURUNITS, PERIOD, and PERUNITS.

User response

Verify that the correct values have been used for DURATION, DURUNITS, PERIOD, and PERUNITS. Update these values, if necessary.

ANR05 Import 77E *command:*
Invalid value for DAYOFWEEK parameter in exported data - administrative schedule *schedule name* defined with default DAYOFWEEK value.

Explanation

During processing of command *import command*, an invalid value is encountered for the DAYOFWEEK parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the default DAYOFWEEK value for this schedule.

User response

Verify that the correct DAYOFWEEK value has been used for this schedule. Update this value, if necessary.

ANR05 Import 78E *command:*
Invalid value for DURUNITS or PERUNITS parameter in exported data - existing values for DURATION, DURUNITS PERIOD, and PERUNITS for administrative schedule *schedule name* were not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the DURUNITS or PERUNITS parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the existing values for DURATION, DURUNITS, PERIOD, and PERUNITS.

User response

Verify that the correct values have been used for DURATION, DURUNITS, PERIOD, and PERUNITS. Update these values, if necessary.

ANR05 Import 79E *command:*
Invalid value for DAYOFWEEK

parameter in exported data - existing DAYOFWEEK value for administrative schedule *schedule name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the DAYOFWEEK parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the existing DAYOFWEEK value for this schedule.

User response

Verify that the correct DAYOFWEEK value has been used for this schedule. Update this value, if necessary.

ANR05 Export 80E *command:*
Invalid value for SPACEMGTECHNIQUE parameter detected while exporting management class *management class name* in domain *domain name*, set *policy set name* - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the SPACEMGTECHNIQUE parameter for management class *management class name* in domain *domain name*, policy set *policy set name*.

System action

Export processing continues, but the exported data contains an unknown SPACEMGTECHNIQUE value for this management class. If this data is imported, the default or existing SPACEMGTECHNIQUE value is used.

User response

Update the SPACEMGTECHNIQUE value for this copy group and restart the export. Alternatively, use the export data with the unknown value, and check and update the SPACEMGTECHNIQUE value after import processing has been performed.

ANR05 Export 81E *command:*
Invalid value for MIGREQUIRESB KUP parameter detected while exporting management class *management class name* in domain *domain name*, set *policy set name* - default or

existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the MIGREQUIRESBKUP parameter for management class *management class name* in domain *domain name*, policy set *policy set name*.

System action

Export processing continues, but the exported data contains an unknown value for this management class. If this data is imported, the default or existing MIGREQUIRESBKUP value is used.

User response

Update the MIGREQUIRESBKUP value for this copy group and restart the export. Alternatively, use the export data with the unknown value, and check and update the MIGREQUIRESBKUP value after import processing has been performed.

ANR05 Import 82E command:
Invalid value for SPACEMGTECHNIQUE parameter in exported data for management class *management class name* in domain *domain name*, set *policy set name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the SPACEMGTECHNIQUE parameter for management class *management class name*, in policy domain *domain name*, policy set *policy set name*.

System action

Processing of the command continues. If a later command is issued that causes the data to be imported, the default or existing SPACEMGTECHNIQUE value is used.

User response

None. If the data is imported with a later command, verify that the correct SPACEMGTECHNIQUE value is used for this management class.

ANR05 Import 83E command:
Invalid value for SPACEMGTECHNIQUE parameter in exported data - management class *management class name* in domain *domain name*, set *policy set name* defined with default SPACEMGTECHNIQUE value.

Explanation

During processing of command *import command*, an invalid value is encountered for the SPACEMGTECHNIQUE parameter for management class *management class name*, in policy domain *domain name*, policy set *policy set name*.

System action

Processing of the command continues, by using the default SPACEMGTECHNIQUE value for this management class.

User response

Verify that the correct SPACEMGTECHNIQUE value has been used for this management class. Update this value, if necessary.

ANR05 Import 84E command:
Invalid value for SPACEMGTECHNIQUE parameter in exported data - SPACEMGTECHNIQUE value for management class *management class name* in domain *domain name*, set *policy set name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the

SPACEMGTECHNIQUE parameter for management class *management class name*, in policy domain *domain name*, policy set *policy set name*.

System action

Processing of the command continues, by using the existing SPACEMGTECHNIQUE value for this management class.

User response

Verify that the correct SPACEMGTECHNIQUE value has been used for this management class. Update this value, if necessary.

ANR05 Import 85E command:
Invalid value for MIGREQUIRESBKUP parameter in exported data for management class *management class name* in domain *domain name*, set *policy set name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the MIGREQUIRESBKUP parameter for management class *management class name*, in policy domain *domain name*, policy set *policy set name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing MIGREQUIRESBKUP value is used.

User response

None. If the data is imported with a later command, verify that the correct MIGREQUIRESBKUP value is used for this management class.

ANR05 Import 86E command:
Invalid value for MIGREQUIRESBKUP parameter in exported data - management class management class name in domain domain name, set policy set name defined with default MIGREQUIRESBKUP value.

Explanation

During processing of command *import command*, an invalid value is encountered for the MIGREQUIRESBKUP parameter for management class *management class name*, in policy domain *domain name*, policy set *policy set name*.

System action

Processing of the command continues, by using the default MIGREQUIRESBKUP

value for this management class.

User response

Verify that the correct MIGREQUIRESBKUP value has been used for this management class. Update this value, if necessary.

ANR05 Import 87E command:
Invalid value for MIGREQUIRESBKUP parameter in exported data - MIGREQUIRESBKUP value for management class management class name in domain domain name, set policy set name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the MIGREQUIRESBKUP parameter.

System action

Processing of the command continues, by using the existing MIGREQUIRESBKUP value for this management class.

User response

Verify that the correct MIGREQUIRESBKUP parameter has been used for this management class. Update this value, if necessary.

ANR05 Import 88E command:

Server is down-level compared to export data version version number.

Explanation

An attempt is made to import data to a down-level server. The server on which the import is performed must be at the same or later level than the server from which the data was exported.

System action

The import process ends and server operation continues.

User response

Import to a server that is at the same or later level than the server from which the export was performed.

ANR05 Import 89E command:
Preview processing terminated abnormally - server is down-level.

Explanation

Processing for the command *import command* in preview mode ends when it is determined that the server is down-level compared to the export data.

System action

Import processing ends and server operation continues.

User response

Import to a server that is at the same or later level than the server from which the export was performed.

ANR05 Import 90E command:
Processing terminated abnormally - server is down-level.

Explanation

Processing for the command *import command* ends when it is determined that the server is down-level compared to the export data.

System action

Import processing ends and server operation continues.

User response

Import to a server that is at the same or later level than the server from which the export was performed.

ANR05 Export/import 92E command:
Invalid value for table of contents parameter - parameter value.

Explanation

The value (*parameter value*) specified for the table of contents (TOC) parameter in command *export/import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid TOC parameter.

ANR05 93E *Export/import command: Invalid value for NOSPAN parameter - parameter value.*

Explanation

The value (*parameter value*) specified for the NOSPAN parameter in command *export/import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid NOSPAN parameter.

ANR05 94E *device class: NOSPAN parameter can only be used with a 3590 device class.*

Explanation

The device class specified must be a 3590 device class when NOSPAN is set to True.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid NOSPAN/Device Class parameter.

ANR05 95W *The server deleted object count objects that were part of incomplete groups.*

Explanation

After importing data that was exported from another server, the server deletes any objects that are part of incomplete groups. Incomplete groups may be a result of importing from media written by an export operation that failed. Incomplete groups may also be a result of a failed import operation.

System action

Server operation continues.

User response

Ensure that the export and import operations run to completion. If any errors are observed, correct them and run again the export or import or both, as needed.

ANR05 96W *Space-managed object object name for client node node name, filesystem filesystem name already exists*

on the server - it will be skipped.

Explanation

While attempting to import a space-managed object, the server discovers that the object already exists. The space-managed object is skipped.

System action

Server operation continues.

User response

None.

ANR05 97W *IMPORT: Space management attributes in management class management class name for domain domain name is not defined - default management class will be used.*

Explanation

During import processing, the server finds that the space management attributes for a space-managed file being imported does not exist in the active policy set for the domain to which the node is assigned.

System action

The default management class for the node's policy domain is bound to the space-managed file and import processing continues.

User response

If you want to define the missing management class, an authorized administrator may cancel the import operation, define the missing space management attributes or management class for the domain, and process the import operation again.

ANR05 98W *IMPORT: Space management attributes not found for default management class in domain domain name - space managed files bound to management class management class name in this domain cannot be imported.*

Explanation

During import processing, the server finds that a management class bound to a space-managed file being imported does not exist in the active policy set for the domain to which the node is assigned. When trying to rebind the space-managed file to the default management class for the domain, the server finds that the space-managed attributes are not defined for the default management class.

System action

The file is not imported; import processing continues.

User response

If you want to define the missing copy group, an authorized administrator may cancel the import operation, define the missing space management attributes or management class for the domain, and process the import operation again.

ANR05 Export/import 99E *command: Invalid volume name volume name specified for device class device class name.*

Explanation

One of the volume names specified in the VOLUMENAMES parameter for an import or export command is not a valid volume name for the device class specified in the DEVCLASS parameter.

System action

The export or import command fails.

User response

Specify volume names in the VOLUMENAMES parameter that are valid for the device class specified in the DEVCLASS parameter.

ANR06 Export 00I *command: No matching policy domains found for exporting.*

Explanation

The background export process does not find any policy domains that

match the specification entered in the *export command*.

System action

The export process continues and no policy domains are exported from the server.

User response

None.

ANR06 Export 01I *command: No policy sets found in policy domain domain name for exporting.*

Explanation

The background export process does not find any policy sets defined in domains matching *domain name*.

System action

The export process continues and no policy sets are exported from the domain.

User response

None.

ANR06 Export 02I *command: No management classes were found in policy domain domain name for exporting.*

Explanation

The background export process does not find any management classes defined in policy domains matching *domain name*.

System action

The export process continues and no management classes are exported from the domain.

User response

None.

ANR06 Export 03I *command: No copy groups were found in policy domain domain name for exporting.*

Explanation

The background export process does not find any copy groups defined in policy domains matching *domain name*.

System action

The export process continues and no copy groups are exported from the domain.

User response

None.

ANR06 Export 04I *command: No schedules were found in policy domain domain name for exporting.*

Explanation

The background export process does not find any schedules defined for policy domains matching *domain name*.

System action

The export process continues and no

schedules are exported for the domain.

User response

None.

ANR06 Export 05I *command: No schedule associations were found in policy domain domain name for exporting.*

Explanation

The background export process does not find any schedule node associations defined for policy domains matching *domain name*.

System action

The export process continues and no schedule associations are exported for the domain.

User response

None.

ANR06 Export 06I *command: No node definitions were found for exporting.*

Explanation

The background export process does not find any node definitions to export as specified in the command *export command*.

System action

The export process continues.

User response

None.

ANR06 Export 07I **command: No administrator definitions were found for exporting.**

Explanation

The background export process does not find any administrator definitions to export as specified in the command *export command*.

System action

The export process continues.

User response

None.

ANR06 Command: 08E **Command failed - see previous error messages or view the activity log.**

Explanation

The indicated import command has failed. This message is always preceded by one or more other error messages which provide more detail about why the command failed.

System action

The operation fails.

User response

Examine the previous error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the

problem and try the command again.

ANR06 Command 09I **started as process process ID.**

Explanation

A background process has been started to service the command *command*. The background process is defined as process *process ID*.

System action

Server operation continues.

User response

To query the progress of the background process, use the QUERY PROCESS command. To cancel the background process, use the CANCEL PROCESS command. Use the *process ID* number to specify this specific process.

ANR06 Command 10I **started by administrator name as process process ID.**

Explanation

A background process has started to service the command *command* entered by administrator *administrator name*. The background process is defined as process *process ID*.

System action

Server operation continues.

User response

To query the progress of the background process, use the QUERY PROCESS command. To cancel the background process, use the CANCEL PROCESS command. Use the *process ID* number to specify this specific process.

ANR06 Command 11I **started by administrator name as process process ID has ended.**

Explanation

The background process to service the command *command* by administrator *administrator name* has completed processing.

System action

The specified process ends, and server operation continues.

User response

None.

ANR06 Import 12I **command: Reading EXPORT SERVER data from server server name exported export date export time.**

Explanation

The background import process to service the command *import command* is importing information exported from server *server name* with the EXPORT SERVER

command on *export date* at *export time*.

System action

Import processing continues.

User response

None.

ANR06 Import 13I **command: Reading EXPORT POLICY data from server server name exported export date export time.**

Explanation

The background import process to service the command *import command* is importing information exported from server *server name* with the EXPORT POLICY command on *export date* at *export time*.

System action

Import processing continues.

User response

None.

ANR06 Import 14I **command: Reading EXPORT ADMIN data from server server name exported export date export time.**

Explanation

The background import process to service the command *import command* is importing information exported from server *server name*

with the EXPORT ADMIN command on *export date* at *export time*.

System action

Import processing continues.

User response

None.

**ANR06 Import
15I command:
Reading
EXPORT NODE
data from server
server name
exported export
date export time.**

Explanation

The background import process to service the command *import command* is importing information exported from server *server name* with the EXPORT NODE command on *export date* at *export time*.

System action

Import processing continues.

User response

None.

**ANR06 Export/import
16I command:
Preview
processing
completed
successfully.**

Explanation

The background export or import process to service the command *export/import command* in preview (Preview=Yes) mode has completed successfully.

System action

Export or import processing for the command completes. Statistics on the projected number and type of objects moved, together with the projected total number of bytes copied, are displayed on the server console following this message.

User response

None.

**ANR06 Export/import
17I command:
Processing
completed with
status status.**

Explanation

The background export or import process to service the command *export/import command* has completed with status *status*. If the status is INCOMPLETE, some files have been skipped due to errors reading or writing the file.

System action

Export or import processing for the command completes. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message. A summary of the number of files that were skipped is also displayed.

User response

None.

**ANR06 Export/import
18I command:
Preview
processing
canceled before
completion.**

Explanation

The background export or import process to service the command *export/import command* in preview (Preview=Yes) mode has been canceled with the CANCEL PROCESS command.

System action

Export or import processing for the command ends. Statistics on the projected number and type of objects moved, together with the projected total number of bytes copied, are displayed on the server console following this message.

User response

None.

**ANR06 Command:
19I Processing
canceled before
completion.**

Explanation

The background process to service the command *command* has been canceled with the CANCEL PROCESS command.

System action

Processing for the command *command* ends. Statistics on the number and type of objects moved, together with the total number

of bytes copied, are displayed on the server console following this message.

User response

None.

**ANR06 Export/import
20I command:
Copied number
domain(s).**

Explanation

The background export or import process to service the command *export/import command* copies *number* policy domain definitions from the server database to export media or from export media into the server database. Data is not actually moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
21I command:
Copied number
policy sets.**

Explanation

The background export or import process to service the command *export/import command* copies *number* policy set definitions from the server database to export media or from export media into the

server database. Data is not actually moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 22I command: Copied number management classes.

Explanation

The background export or import process to service the command *export/import command* copies *number* management class definitions from the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 23I command: Copied number copy groups.

Explanation

The background export or import process to service the command *export/import command* copies *number* copy group definitions from either the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 24I command: Copied number schedules.

Explanation

The background export or import process to service the command *export/import command* copies *number* schedule definitions from either the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 25I command: Copied number administrators.

Explanation

The background export or import process to service the command *export/import command* copies *number* administrator definitions from either the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 26I command: Copied number node definitions.

Explanation

The background export or import process to service the command *export/import command* copies *number* client node definitions from the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR06 Export/import 27I command: Copied filespace number file spaces archive number archive files, backup number backup files, and spacemg number space managed files.

Explanation

The background export or import process to service the command *export/import command* copies *filespace number* client file space definitions, *archive number* archive file copies, *backup number* backup file copies, and *spacemg number* space-managed files from either the server database to export media or from import media into the server database. Data is not actually moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
29I command:
Copied number
bytes of data.**

Explanation

The background export or import process to service the command *export/import command* copies *number* bytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. Data is not moved if Preview=Yes is specified in the command *export/import command*. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
30I command:
Copied number
kilobytes of
data.**

Explanation

The background export or import process to service the command *export/import command* copies *number* kilobytes of data

from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
31I command:
Copied number
megabytes of
data.**

Explanation

The background export or import process to service the command *export/import command* copies *number* megabytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the

command completes. Server operation continues.

User response

None.

**ANR06 Export/import
32I command:
Copied number
gigabytes of
data.**

Explanation

The background export or import process to service the command *export/import command* copies *number* gigabytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
33I command:
Copied number
terabytes of
data.**

Explanation

The background export or import process to service the command *export/import command* copies

number terabytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

**ANR06 Export/import
34I command:
Detected
number errors.**

Explanation

The background export or import process to service the command *export/import command* detects *number* errors while copying information from the server database and data storage to the export media or from the export media to the server database and data storage.

System action

Export or import processing for the command completes. Server operation continues.

User response

Examine the server messages issued prior to this message to view the error. Use the QUERY ACTLOG command to view the activity log and search for messages.

ANR06 35I *Export/import command:*
Processing node *node name* in domain *domain name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing the client node definition information for node *node name*. The node will be imported to domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 36I *Import command:*
Processing file space *filespace name* for node *node name* as file space *new filespace name*.

Explanation

The background import process to service the command *import command* is currently processing the client file space definition information for file space *filespace name* belonging to client node *node name*.

to client node *node name*. The file space is imported under the name *new filespace name*. During import processing, file spaces defined for clients are not replaced, and file copy information in the file spaces are imported to new file space names so that client file copies are not mixed with existing definitions. Import processing can then create file spaces with names generated by the import processor for client nodes that existed prior to the import operation.

System action

Import processing for the command continues.

User response

None; however, clients may want to examine the contents of the file space with the name *new filespace name* so that they know where certain file copies are kept.

ANR06 37I *Export/import command:*
Processing file space *filespace name* for node *node name* fsId *filespace id*.

Explanation

The background export or import process to service the command *export/import command* is currently processing client node file space information for file space *filespace name* belonging to client node *node name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 38I *Export/import command:*
Processing administrator *administrator name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing the administrator definition information for administrator *administrator name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 39I *Export/import command:*
Processing domain *domain name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing the policy domain definition information for domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 40I *Export/import command:*
Processing policy set *set name* in policy domain *domain name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing the policy set definition information for policy set *set name* belonging to policy domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 41I *Export/import command:*
Processing management class *class name* in domain *domain name*, set *set name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing the management class definition information for

management class *class name* belonging to policy set *set name* in policy domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 42I *Export/import command: Processing backup copy group in domain domain name, set set name, management class class name.*

Explanation

The background export or import process to service the command *export/import command* is currently processing the backup copy group definition information for management class *class name* belonging to policy set *set name* in policy domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 43I *Export/import command: Processing archive copy group in domain domain name, set set name, management*

class class name.

Explanation

The background export process to service the command *export/import command* is currently processing the archive copy group definition information for management class *class name* belonging to policy set *set name* in policy domain *domain name*.

System action

Export processing for the command continues.

User response

None.

ANR06 44I *Export command: Processing copy group of unknown type in domain domain name, set set name, management class class name.*

Explanation

The background export or import process to service the command *export command* is currently processing copy group definition information for management class *class name* belonging to policy set *set name* in policy domain *domain name*. The type of copy group being processed is unknown.

System action

Export or import processing for the

command continues. The import or export process assumes that the copy group is a backup copy group.

User response

After policy definitions are imported, use the QUERY MGMTCLASS and QUERY COPYGROUP commands to query the server definitions for management class *class name* to ensure that the copy groups defined have the desired attributes and types. Alternatively, the copy group can be deleted and defined with the correct type, and then the export command can be issued again.

ANR06 45I *Export/import command: Processing schedule schedule name in domain domain name.*

Explanation

The background export or import process to service the command *export/import command* is currently processing the schedule definition information for schedule *schedule name* belonging to policy domain *domain name*.

System action

Export or import processing for the command continues.

User response

None.

ANR06 46I *Export/import command: message*

Explanation

The background export or import process to service the command *export/import command* has received the message *message* from the server.

System action

Export or import processing for the command continues, but errors may have been encountered.

User response

Examine the documentation for the message *message* and resolve the problem reported.

ANR06 47I *Cancel in progress*

Explanation

The export or import operation has been canceled and will end when resources have been freed for the background process. This message may be displayed in response to a QUERY PROCESS command for an export or import operation.

System action

Server operation continues.

User response

None.

ANR06 48I *Have copied the following:*

Explanation

The export or import operation has copied the number and types

of objects displayed. This message may be displayed in response to a QUERY PROCESS command for an export or import operation.

System action

Server operation continues.

User response

None.

ANR06 Import 49I *command: Domain domain name does not exist - the system will attempt to import node node name to domain STANDARD.*

Explanation

The background import process to service the command *import command* is currently processing client node *node name*. This node was assigned to domain *domain name* at the time of export. However, domain *domain name* does not exist on the server to which the import is being performed.

System action

Import processing continues, but node *node name* will be assigned to domain STANDARD during import unless one of the following conditions exist:

- Preview=Yes

- Node *node name* is already registered and Replacedefs=No
- Domain STANDARD does not exist

User response

If Preview=Yes, consider defining domain *domain name* before nodes are actually imported. Otherwise, domain *domain name* can be created after the node is imported and the UPDATE NODE command can be used to assign the node to domain *domain name*.

ANR06 IMPORT: 50W *Archive copygroup copy group name in management class management class name for domain domain name is not defined, default management class will be used.*

Explanation

During import processing, the server finds that a management class or copy group bound to an archive file being imported does not exist in the active policy set for the domain to which the node is assigned.

System action

The default management class for the node's policy domain is bound to the archive file and import processing continues.

User response

If you want to define the missing management class, an authorized administrator may cancel the import operation, define the missing management class or copy group for the domain, and process the import operation again.

ANR06 IMPORT: 51W *Backup copygroup copy group name in management class management class name for domain domain name is not defined, default management class will be used.*

Explanation

During import processing, the server finds that a management class or copy group bound to a backup file being imported does not exist in the active policy set for the domain to which the node is assigned.

System action

The default management class for the node's policy domain is bound to the backup file copy and import processing continues.

User response

If you want to define the missing management class, an authorized administrator may cancel the import operation, define the missing management class or

copy group for the domain, and process the import operation again.

ANR06 IMPORT: 52W *Archive copygroup not found for default management class in domain domain name - archive files bound to management class management class name in this domain cannot be imported.*

Explanation

During import processing, the server finds that a management class or copy group bound to an archive file being imported does not exist in the active policy set for the domain to which the node is assigned. When trying to rebind the archive file to the default management class for the domain, the server finds that an archive copy group is not defined for the default management class.

System action

The file is not imported; import processing continues.

User response

If you want to define the missing copy group, an authorized administrator may cancel the import operation, define the missing management class or copy group for the domain, and process

the import operation again.

ANR06 IMPORT:
53W Backup copygroup not found for default management class in domain *domain name* - backup files bound to management class *management class name* in this domain cannot be imported.

Explanation

During import processing, the server finds that a management class or copy group bound to a backup file being imported does not exist in the active policy set for the domain to which the node is assigned. When trying to rebind the backup file to the default management class for the domain, the server finds that a backup copy group is not defined for the default management class.

System action

The file is not imported; import processing continues.

User response

If you want to define the missing copy group, an authorized administrator may cancel the import operation, define the missing management class or copy group for the domain, and process

the import operation again.

ANR06 Restartable
54I export command with export identifier *exportID* started as process *process ID*.

Explanation

A background process was started to service the command *command*. The background process is defined as process *process ID*.

System action

Server operation continues.

User response

To query the progress of the background server-to-server export process, issue the QUERY PROCESS or QUERY EXPORT command. To suspend the process, issue the SUSPEND EXPORT command. To cancel the background process, issue the CANCEL PROCESS command. Use the *process ID* number to specify this specific process.

ANR06 Command:
55W Retrieve or restore failed - file was deleted from data storage during retrieval.

Explanation

The server ends a file retrieval operation for the specified command because the file has been deleted from data

storage by another process before retrieval is complete.

System action

The server ends the command and continues operation.

User response

Contact your administrator to find out if DELETE FILESPACE, DELETE VOLUME, or inventory expiration processes are running; these processes can delete data storage files during retrieval. Reissue the command after these processes have been completed or canceled.

ANR06 Export/import
56W command:
Skipped archive number archive files, backup number backup files, and spacemg number space managed files.

Explanation

The background export or import process to service the command *export/import command* skipped *archive number* archive file copies, *backup number* backup file copies, and *spacemg number* space-managed files from either the server database to export media or from import media into the server database. Data is not actually moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

Check previous messages for the names of the files that were not exported or imported, and problem determination information.

ANR06 Export
57W command:
Invalid authorization rule type *rule type* encountered for file space *filesystem name fsId* *filesystem id* in node *node name* - both backup and archive will be assumed during import.

Explanation

During import processing, the server encounters an invalid file space authorization rule type for the indicated file space and node.

System action

Server operation continues.

User response

After import processing is completed, ask the user of node *node name* to query the access rules and ensure that they are specified as desired. The user should correct any rules that grant access

to objects that the user does not want others to access.

ANR06 Export 58W *command: The password for administrator administrator name could not be obtained. The value 'password value' will be assumed: The system administrator may wish to change this password after importing administrator administrator name.*

Explanation

During processing of command *export command*, the export processor cannot obtain the password for administrator *administrator name*. The value *password value* is assigned as the password for the administrator on the export media.

System action

Processing of the command continues.

User response

After the administrative definition has been imported to another server, an authorized administrator should use the UPDATE ADMIN command to set a password for the administrator *administrator name*.

ANR06 Export 59W *command: The password for node node name could not be obtained. The value 'password value' will be assumed: The system administrator may wish to change this password after importing node node name.*

Explanation

During processing of command *export command*, the export processor cannot obtain the password for client node *node name*. The value *password value* is assigned as the password for the client node on the export media.

System action

Processing of the command continues.

User response

After the client node definition has been imported to another server, an authorized administrator should use the UPDATE NODE command to set a password for the node *node name*.

ANR06 Command: 60E *Insufficient memory available in accessing data storage.*

Explanation

The server encounters a memory shortage

in accessing data storage during command *command* operation.

System action

The command *command* operation ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR06 Command: 61E *Internal error encountered in accessing data storage.*

Explanation

The server encounters an internal error in accessing data storage while processing command *command* operation.

System action

The command *command* operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If the failure can be found and resolved, reissue the command *command* operation. If the failure cannot be found, contact your service representative for assistance in resolving the problem.

ANR06 Command: 62E *Output error*

encountered in accessing data storage.

Explanation

The command *command* operation ends because an error has been encountered by the server in writing to a device. Possible reasons include:

- I/O error writing to a device
- No storage space.
- Incompatible storage pool data format.

System action

The command *command* operation ends and server operation continues.

User response

Query the activity log to find messages preceding this one to determine the cause of the error. After the problem is corrected, the command can be retried.

ANR06 Command: Data 63E *transfer was interrupted in accessing data storage.*

Explanation

The database transaction associated with command *command* operation failed because data transfer to or from data storage was interrupted by an external event.

System action

The command *command* operation is ended

and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Reissue the command *command* after the problem is resolved.

ANR06 64E *Export/import command: Media not accessible in accessing data storage.*

Explanation

The server ends a transaction for an export or import operation because storage volumes are not available in the storage pools in which the client files are to be stored.

System action

The server ends the export or import operation and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available for file storage.

ANR06 65W *Import command: Transaction failed - storage*

pool pool name is not defined.

Explanation

The server rolls back a database update transaction for an import operation because the destination specified for a management class copy group specifies the named storage pool, but that storage pool does not exist.

System action

The import operation is ended and server operation continues.

User response

An administrator with policy authority over the client policy domain must correct management class definitions so that copy group destinations refer to defined storage pools, or the specified storage pool must be created by an authorized administrator.

ANR06 66W *Import command: Transaction failed - object excluded by size in storage pool pool name and all successor pools.*

Explanation

The server ends a database update transaction for an import operation because the size of an imported file is larger than that allowed in the storage pool specified in the bound management class copy group for the file.

No successor storage pools to the one specified on the copy group can accept the large file.

System action

The import operation is ended and server operation continues.

User response

The maximum file size for one or more of the storage pools in the storage hierarchy can be increased to accommodate the file. An authorized administrator can increase the MAXSIZE parameter by issuing the UPDATE STGPPOOL command. Alternatively, the appropriate copygroup definition can be updated so that a different destination storage pool is specified.

ANR06 67W *Import command: Transaction failed - no space available in storage pool pool name and all successor pools.*

Explanation

The server ends an import operation because the storage pool specified in a management class copy group does not contain enough free space to hold the files being imported. Successor storage pools to the one specified on the copy group do not contain enough free space.

System action

The import operation is ended and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy.

ANR06 68W *Export/import command: Transaction failed - error on output storage device.*

Explanation

The server ends an export or import operation for the specified session because an I/O error has been encountered by the server in writing to a device.

System action

The server ends the export or import operation and server operation continues.

User response

Query the activity log to find messages preceding this one that specify the device that is failing. Storage pool volumes can be varied offline (by using the VARY OFFLINE command), or the server may need to be shut down by using the HALT command to correct the hardware problem. After the problem is corrected, the client may be able to try the operation again.

ANR06 69W *Export/import command: Transaction failed - data transfer interrupted.*

Explanation

The database transaction associated with an export or import operation failed because data transfer to or from data storage was interrupted by an external event.

System action

The export or import operation is ended and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Attempt the export/import operation again after problem is resolved.

ANR06 70W *Export/import command: Transaction failed - storage media inaccessible.*

Explanation

The server ends a transaction for an export or import operation because storage volumes are not available in the storage pools in which the client files are to be stored.

System action

The server ends the export or import

operation and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available for file storage.

ANR06 71W *Export/import command: Transaction failed - sufficient recovery log space is not available.*

Explanation

The server ends a database update transaction for an export or import operation because sufficient log space is not available on the server.

System action

The server ends the export or import operation and server operation continues.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the

dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR06 72W *Export/import command: Transaction failed - sufficient database space is not available.*

Explanation

The server ends a database update transaction for an export or import operation because sufficient database space is not available on the server.

System action

The server ends the export or import operation and server operation continues.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to

add one or more directories to the database.

ANR06 73W *Export/import command: Data storage retrieve or restore failed - error detected.*

Explanation

The server ends an export or import operation because an error has been encountered on the server. Some common reasons for the error are:

- The input volume is unavailable
- The storage pool is unavailable
- Data is corrupted on the input volume
- Hardware or media failure has occurred
- Database corruption

System action

The server ends the export or import operation and continues operation.

User response

Examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the problem and try the restore or retrieve again.

ANR06 74W *Export command: Retrieve failed - error on input storage device.*

Explanation

The server ends an export operation for the specified session because an I/O error has been encountered by the server in reading from a device. The object for which the I/O was issued is reported in a later message.

System action

Export processing skips this file, and continues operation.

User response

Query the activity log to find messages preceding this one that specify the device that is failing. Storage pool volumes can be varied offline (by using the VARY OFFLINE command), or the server may need to be shut down with the HALT command to correct the hardware problem.

ANR06 EXPORT/75E IMPORT: Error starting the Export/Import Session.

Explanation

The server export/import process is not able to start the session to export information from the server or import information into the server.

System action

The export or import process ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR06 EXPORT/76E IMPORT command Command: Volume(Volume Name) is not a valid volume name for the Export/Import command. The volume is defined to a retention storage pool.

Explanation

The server export/import process determined that the specified volume name is defined as a retention pool volume. Retention pool volumes can not be used as media for EXPORT/IMPORT processes.

System action

The export or import process ends and server operation continues.

User response

Specify volumes which are not assigned to retention pools or specify that scratch volumes be used for the EXPORT/IMPORT command media.

ANR06 command name: 77E Node node name cannot be imported because the MERGEFILESACES=YES parameter value

is specified, and that node has retention data associated with it.

Explanation

During an IMPORT NODE or the IMPORT SERVER operation, the server detected that the node being imported has retention set data associated with it. When you issue the IMPORT NODE or IMPORT SERVER command, the MERGEFILESACES=YES parameter value cannot be specified for nodes that have data that is included in retention sets.

System action

Server operation continues, but the import command fails.

User response

To resolve the issue, complete the following steps:

1. To determine which nodes have data in retention sets, issue the QUERY RESET command.
2. To import data from file spaces that have data in retention sets, issue the IMPORT NODE command for those file spaces and specify the MERGEFILESACES=N O parameter value.

ANR06 EXPORT/78E IMPORT: Communication s Failure in Sending "verb type" verb.

Explanation

The server export/import process encounters a communications error in using the *verb type* verb to transfer information to or from the server.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/79E IMPORT: Communication s Failure in Receiving "verb type" verb.

Explanation

The server export/import process encounters a communications error in using the *verb type* verb to transfer information to or from the server.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/81E IMPORT: Authentication Failure.

Explanation

The server export/import process encounters an authentication error in transferring information to or from the server.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/82E IMPORT: Communications Failure in Sending "verb type" verb (command).

Explanation

The server export/import process encounters a communications error in using the *verb type* verb to issue command *command*.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/83E IMPORT: Receive Buffer overflow.

Explanation

The server export/import process encounters an overflow error in transferring information to or from the server.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/84E IMPORT: Communications failure: bad verb received (verb type).

Explanation

The server encounters an invalid communications verb during export or import processing and is not able to continue processing.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/85E IMPORT: Internal error: Invalid table output handle detected.

Explanation

The server export/import process encounters an internal error in transferring information to or from the server.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

ANR06 EXPORT/import 86E command: Transaction failure - could not start database transaction.

Explanation

During processing of command *export/import command*, a database transaction cannot be started in the server database.

System action

Processing of the command terminates.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 EXPORT/import 87E command: Transaction failure - could not commit database transaction.

Explanation

During processing of command *export/import command*, a database transaction cannot be committed to the server database.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 EXPORT/import 88E command: Transaction failure - commit called when no transaction started.

Explanation

During processing of command *export/import command*, a database transaction cannot be started in the server database.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 command name: 89E Node node name, filespace name. The MERGEFILESACES=YES parameter value

cannot be specified for file spaces that have data in retention sets.

Explanation

During an IMPORT NODE or the IMPORT SERVER operation, the server detected a file space that has retention set data associated with it. When you issue the IMPORT NODE or IMPORT SERVER command, the MERGEFILESPPACES=YES parameter value cannot be specified for file spaces that have data that is included in retention sets.

System action

Server operation continues, but the import command fails.

User response

To resolve the issue, complete the following steps:

1. To determine which file spaces have data in retention sets, issue the QUERY RESET command.
2. To import data from file spaces that have data in retention sets, issue the IMPORT NODE command for those file spaces and specify the MERGEFILESPPACES=N O parameter value.

ANR06 Export/import 90E command:
Transaction failure - server aborted the transaction (abort code).

Explanation

During processing of command *export/import command*, a database transaction cannot be committed in the server database. The reason code *abort code* is returned.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 Command: Out 92E of space on sequential media, scratch media could not be mounted.

Explanation

During command *command* processing, the process encounters an out-of-space condition writing to the sequential media. Command *command* ends when there is no more space on the sequential media for storing data and SCRATCH=NO has been specified on command *command*.

System action

Command *command* processing ends. Server processing continues.

User response

Reissue the command and specify SCRATCH=YES or specify additional volume names on the command.

ANR06 Import 94E command:
Invalid record format (format code) detected on import.

Explanation

During processing of command *import command*, an invalid record type is detected when reading the exported information from the export media.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 Export 95E command:
Unexpected error error code encountered in receiving table output data.

Explanation

During processing of command *export command*, an unexpected error is detected.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR06 Export 96E command:
Output table error encountered - 0 columns reported in the table.

Explanation

During processing of command *export command*, an unexpected error is detected.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages.

If the error cannot be isolated and resolved, contact your service representative.

**ANR06 Export
97E command:
Output table
error
encountered -
not positioned
to the first
column in the
table.**

Explanation

During processing of command *export command*, an unexpected error is detected.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR06 Export/import
98E command:
Invalid value for
FILEDATA
parameter -
parameter
value.**

Explanation

The value (*parameter value*) specified for the FILEDATA parameter in command *export/import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid FILEDATA parameter.

**ANR06 Export/import
99E command:
Device class
DISK cannot be
specified for
this command.**

Explanation

The DEVCLASS value DISK cannot be specified for the command *export/import command*.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid device class. Issue the QUERY DEVCLASS command for a list of valid device classes for the server.

**ANR07 Export/import
00E command:
Invalid value for
PREVIEW
parameter -
parameter
value.**

Explanation

The value (*parameter value*) specified for the PREVIEW parameter in command *export/import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid PREVIEW parameter.

**ANR07 Export/import
01E command:
Invalid value for
SCRATCH
parameter -
parameter
value.**

Explanation

The value (*parameter value*) specified for the SCRATCH parameter in command *export/import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid SCRATCH parameter.

**ANR07 Export
05E command: The
VOLUMENAMES
parameter must
be specified
when
SCRATCH=NO is
specified.**

Explanation

The SCRATCH parameter is specified as NO for the command *export command* but the VOLUMENAMES parameter is not specified. When scratch

volumes are not allowed, the VOLUMENAMES parameter must be specified to indicate the volumes that can be used for the command.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid VOLUMENAMES parameter.

**ANR07 Export
06E command: A
device class
must be
specified unless
PREVIEW=YES
is specified.**

Explanation

The DEVCLASS parameter is not specified in the command *export command*. Unless PREVIEW=YES is specified, a DEVCLASS value must be specified.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid device class. Issue the QUERY DEVCLASS command for a list of valid device classes for the server.

**ANR07 Export
07E command: The
FILESPEC
parameter
cannot be
specified.**

Explanation

The FILESPACE parameter is specified for the command *export command*, but the FILEDATA parameter is specified as NONE, or is not specified and defaults to NONE. File spaces are only copied if the FILEDATA parameter is specified with a value other than NONE.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid FILEDATA parameter.

ANR07 Import 08E *command:* The FILESPACE parameter cannot be specified unless the FILEDATA parameter specifies that files should be imported.

Explanation

The FILESPACE parameter is specified for the command *import command*, but the FILEDATA parameter is specified as NONE, or is not specified and defaults to NONE. File spaces are only copied if the FILEDATA parameter is specified with a value other than NONE.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid FILEDATA parameter.

ANR07 Command: No 09E matching nodes registered in the specified domains.

Explanation

The DOMAIN parameter has been specified for this command, but no nodes matching the node name specification are found in the domains specified.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid combination of node and domain names. Use the QUERY NODE command to view the names of nodes in the domains that you are interested in exporting.

ANR07 Command: 10E Unable to start background process.

Explanation

The server command processor is not able to start a background process to perform the command *command*.

System action

The command process ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR07 Import 12E *command:* Invalid value for DATES parameter - parameter value.

Explanation

The value (*parameter value*) specified for the DATES parameter in command *import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid DATES parameter.

ANR07 Import 13E *command:* Invalid value for REPLACEDEFS parameter - parameter value.

Explanation

The value (*parameter value*) specified for the REPLACEDEFS parameter in command *import command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid REPLACEDEFS parameter.

ANR07 Import 15E *command:* A device class must be specified.

Explanation

The command *import command* has been specified, but does not include specification of the DEVCLASS parameter. The DEVCLASS parameter must be specified for this command.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid device class. For a list of valid device classes for the server, issue the QUERY DEVCLASS command.

ANR07 Import 16E *command:* Invalid export data detected.

Explanation

The command *import command* encounters invalid data on the export media while trying to import server information.

System action

The command fails and server operation continues.

User response

Ensure that the mounted export tapes are in the correct order (mounted in the same order as they were mounted during export). Reissue the command, and mount the tapes in the correct order. If the VOLUMENAMES parameter has been specified, make sure that the volume names in the command are specified in the correct order.

ANR07 17E *Export/import command:*
Preview processing terminated abnormally - communications send or receive failed.

Explanation

Processing for the command *export/import command* in preview mode has been terminated when an internal communications error is encountered in the server.

System action

Export/import processing is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to

view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 18E *Export/import command:*
Processing terminated abnormally - communications send or receive failed.

Explanation

Processing for the command *export/import command* ends when an internal communications error is encountered in the server.

System action

Export/import processing is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 19E *Export/import command:*
Preview processing terminated abnormally - insufficient memory.

Explanation

Processing for the command *export/import*

command in preview mode is ended because sufficient memory is not available on the server.

System action

Export/import processing is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR07 20E *command:*
Processing terminated abnormally - insufficient memory.

Explanation

Processing for the command ends because sufficient memory is not available on the server.

System action

Command processing is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR07 21E *Export/import command:*
Preview processing terminated abnormally - unexpected verb received from server.

Explanation

Processing for the command *export/import command* in preview mode ends when an internal communications error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 22E *Export/import command:*
Processing terminated abnormally - unexpected verb received from server.

Explanation

Processing for the command *export/import command* ends when an internal communications error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 23E command: Preview processing terminated abnormally - transaction failure.

Explanation

Processing for the command *export/import command* in preview mode ends when a database transaction error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 24E command: Processing terminated

abnormally - transaction failure.

Explanation

Processing for the command *export/import command* ends when a database transaction error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the source and target server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 25E command: Preview processing terminated abnormally - authentication failure.

Explanation

Processing for the command *export/import command* in preview mode ends when an authentication error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 26E command: Processing terminated abnormally - authentication failure.

Explanation

Processing for the command *export/import command* ends when an authentication error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 27E command: Preview processing terminated abnormally - internal error.

Explanation

Processing for the command *export/import command* in preview mode ends when an internal error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Export/import 28E command: Processing terminated abnormally - internal error.

Explanation

Processing for the command *export/import command* ends when an internal error is encountered in the server.

System action

Export/import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY

ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Import
29E command:
Syntax error
from command
'server
command'.

Explanation

During processing of the command *import command*, an internal syntax error is encountered in the server.

System action

Import processing continues, but the indicated command will have no effect.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. After import processing is complete, it may be necessary to issue additional commands manually to obtain the necessary definitions.

ANR07 Import
30E command:
Internal error
from command
'server
command'.

Explanation

Processing for the command *import command* ends when an

internal command error is encountered in the server.

System action

Import processing ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Import
31E command:
Invalid value for
COMPRESSION
parameter in
exported data
for node node
name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the COMPRESSION parameter for node *node name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing COMPRESSION value is used.

User response

None. If the data is imported with a later

command, verify that the correct COMPRESSION value is used for this node.

ANR07 Import
32E command:
Invalid value for
ARCHDELETE
parameter in
exported data
for node node
name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the ARCHDELETE parameter for node *node name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing ARCHDELETE value is used.

User response

None. If the data is imported with a later command, verify that the correct ARCHDELETE value is used for this node.

ANR07 Import
33E command:
Invalid value for
BACKDELETE
parameter in
exported data
for node node
name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the

BACKDELETE parameter for node *node name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing BACKDELETE value is used.

User response

None. If the data is imported with a later command, verify that the correct BACKDELETE value is used for this node.

ANR07 Import
34E command:
Invalid value for
COMPRESSION
parameter in
exported data -
node node name
registered with
default
COMPRESSION
value.

Explanation

During processing of command *import command*, an invalid value is encountered for the COMPRESSION parameter for node *node name*.

System action

Processing of the command continues, by using the default COMPRESSION value for this node.

User response

Verify that the correct COMPRESSION value has been used for this node.

Update this value, if necessary.

ANR07 Import
35E command:
Invalid value for ARCHDELETE parameter in exported data - node *node name* registered with default ARCHDELETE value.

Explanation

During processing of command *import command*, an invalid value is encountered for the ARCHDELETE parameter for node *node name*.

System action

Processing of the command continues, by using the default ARCHDELETE value for this node.

User response

Verify that the correct ARCHDELETE value has been used for this node. Update this value, if necessary.

ANR07 Import
36E command:
Invalid value for BACKDELETE parameter in exported data - node *node name* registered with default BACKDELETE value.

Explanation

During processing of command *import command*, an invalid value is encountered

for the BACKDELETE parameter for node *node name*.

System action

Processing of the command continues, by using the default BACKDELETE value for this node.

User response

Verify that the correct BACKDELETE value has been used for this node. Update this value, if necessary.

ANR07 Import
37E command:
Invalid value for COMPRESSION parameter in exported data - existing COMPRESSION value for node *node name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the COMPRESSION parameter for node *node name*.

System action

Processing of the command continues, by using the existing COMPRESSION value for this node.

User response

Verify that the correct COMPRESSION value has been used for this node. Update this value, if necessary.

ANR07 Import
38E command:
Invalid value for ARCHDELETE parameter in exported data - existing ARCHDELETE value for node *node name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the ARCHDELETE parameter for node *node name*.

System action

Processing of the command continues, by using the existing ARCHDELETE value for this node.

User response

Verify that the correct ARCHDELETE value has been used for this node. Update this value, if necessary.

ANR07 Import
39E command:
Invalid value for BACKDELETE parameter in exported data - existing BACKDELETE value for node *node name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the BACKDELETE

parameter for node *node name*.

System action

Processing of the command continues, by using the existing BACKDELETE value for this node.

User response

Verify that the correct BACKDELETE value has been used for this node. Update this value, if necessary.

ANR07 Import
40E command:
Invalid value for TYPE parameter in exported data for copy group *copy group name* in domain *domain name*, set policy set *name*, management class *management class name* - backup is assumed.

Explanation

During processing of command *import command*, an invalid value is encountered for the TYPE parameter for copy group *copy group*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. Based upon other copy group parameters, a copy group type of backup is assigned.

User response

Verify that the assigned TYPE value of backup for this copy group is correct.

ANR07 Import
41E **command:**
Invalid value for
TYPE parameter
in exported data
for copy group
copy group name
in domain
domain name,
set policy set
name,
management
class
management
class name -
archive is
assumed.

Explanation

During processing of command *import command*, an invalid value is encountered for the TYPE parameter for copy group *copy group*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. Based upon other copy group parameters, a copy group type of archive is assigned.

User response

Verify that the assigned TYPE value of archive for this copy group is correct.

ANR07 Import
42E **command:**
Invalid value for
TYPE parameter
in exported data
for copy group
copy group name

in domain
domain name,
set *policy set*
name,
management
class
management
class name -
this copy group
will not be
imported.

Explanation

During processing of command *import command*, an invalid value is encountered for the TYPE parameter for copy group *copy group*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. However, this copy group is not imported because a TYPE value cannot be assigned.

User response

Manually define this copy group, if necessary.

ANR07 Import
43E **command:**
Invalid value for
MODE
parameter in
exported data
for archive copy
group copy
group name in
domain domain
name, set policy
set name,
management
class
management
class name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the MODE parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing MODE value is used.

User response

None. If the data is imported with a later command, verify that the correct MODE value is used for this archive copy group.

ANR07 Import
44E **command:**
Invalid value for
MODE
parameter in
exported data
for backup copy
group copy
group name in
domain domain
name, set policy
set name,
management
class
management
class name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the MODE parameter for

backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing MODE value is used.

User response

None. If the data is imported with a later command, verify that the correct MODE value is used for this backup copy group.

ANR07 Import
45E **command:**
Invalid value for
SERIALIZATION
parameter in
exported data
for archive copy
group copy
group name in
domain domain
name, set policy
set name,
management
class
management
class name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the SERIALIZATION parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing **SERIALIZATION** value is used.

User response

None. If the data is imported with a later command, verify that the correct **SERIALIZATION** value is used for this archive copy group.

ANR07 Import 46E *command:*
Invalid value for **SERIALIZATION parameter in exported data for backup copy group copy group name in domain domain name, set policy set name, management class management class name.**

Explanation

During preview processing of command *import command*, an invalid value is encountered for the **SERIALIZATION** parameter for backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues. If a later command causes the data to be imported,

the default or existing **SERIALIZATION** value is used.

User response

None. If the data is imported with a later command, verify that the correct **SERIALIZATION** value is used for this backup copy group.

ANR07 Import 47E *command:*
Invalid value for **MODE parameter in exported data - archive copy group copy group name in domain domain name, set policy set name, management class management class name defined with default **MODE** value.**

Explanation

During processing of command *import command*, an invalid value is encountered for the **MODE** parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the default **MODE** value for this archive copy group.

User response

Verify that the correct **MODE** value has been used for this copy group. Update this value, if necessary.

ANR07 Import 48E *command:*
Invalid value for **MODE parameter in exported data - backup copy group copy group name in domain domain name, set policy set name, management class management class name defined with default **MODE** value.**

Explanation

During processing of command *import command*, an invalid value is encountered for the **MODE** parameter for backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the default **MODE** value for this backup copy group.

User response

Verify that the correct **MODE** value has been used for this copy group. Update this value, if necessary.

ANR07 Import 49E *command:*
Invalid value for **SERIALIZATION parameter in exported data - archive copy group copy group name in domain domain name, set policy set name, management class management class name defined with default **SERIALIZATION** value.**

Explanation

During processing of command *import command*, an invalid value is encountered for the **SERIALIZATION** parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the default **SERIALIZATION** value for this archive copy group.

User response

Verify that the correct **SERIALIZATION** value has been used for this copy group. Update this value, if necessary.

ANR07 Import 50E *command:*
Invalid value for **SERIALIZATION parameter in exported data -**

backup copy group copy group name in domain domain name, set policy set name, management class management class name defined with default SERIALIZATION value.

Explanation

During processing of command *import command*, an invalid value is encountered for the SERIALIZATION parameter for backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the default SERIALIZATION value for this backup copy group.

User response

Verify that the correct SERIALIZATION value has been used for this copy group. Update this value, if necessary.

ANR07 Import 51E command:
Invalid value for MODE parameter in exported data - existing MODE value for archive copy group copy group name in domain domain

name, set policy set name, management class management class name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the MODE parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the existing MODE value for this archive copy group.

User response

Verify that the correct MODE value has been used for this copy group. Update this value, if necessary.

ANR07 Import 52E command:
Invalid value for MODE parameter in exported data - existing MODE value for backup copy group copy group name in domain domain name, set policy set name, management class management class name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the MODE parameter for backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the existing MODE value for this backup copy group.

User response

Verify that the correct MODE value has been used for this copy group. Update this value, if necessary.

ANR07 Import 53E command:
Invalid value for SERIALIZATION parameter in exported data - existing SERIALIZATION value for archive copy group copy group name in domain domain name, set policy set name, management class management class name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the SERIALIZATION

parameter for archive copy group *copy group name*, in policy domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Processing of the command continues, by using the existing SERIALIZATION value for this archive copy group.

User response

Verify that the correct SERIALIZATION value has been used for this copy group. Update this value, if necessary.

ANR07 Import 54E command:
Invalid value for SERIALIZATION parameter in exported data - existing SERIALIZATION value for backup copy group copy group name in domain domain name, set policy set name, management class management class name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the SERIALIZATION parameter for backup copy group *copy group name*, in policy domain *domain name*, policy set *policy set*

name, management class
management class name.

System action

Processing of the command continues, by using the existing SERIALIZATION value for this backup copy group.

User response

Verify that the correct SERIALIZATION value has been used for this copy group. Update this value, if necessary.

ANR07 Import 55E command:
Invalid value for ACTION parameter in exported data for schedule *schedule name* in domain *domain name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the ACTION parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing ACTION value is used.

User response

If the data is imported with a later command, verify that the correct ACTION value is used for this schedule.

ANR07 Import 56E command:
Invalid value for DURUNITS or PERUNITS parameter in exported data for schedule *schedule name* in domain *domain name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the DURUNITS or PERUNITS parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing values are used for DURATION, DURUNITS, PERIOD, and PERUNITS.

User response

If the data is imported with a later command, verify that the correct values for DURATION, DURUNITS, PERIOD, and PERUNITS are used for this schedule.

ANR07 Import 57E command:
Invalid value for DAYOFWEEK parameter in exported data for schedule *schedule name* in domain *domain name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the DAYOFWEEK parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing DAYOFWEEK value is used.

User response

If the data is imported with a later command, verify that the correct DAYOFWEEK value is used for this schedule.

ANR07 Import 58E command:
Invalid value for ACTION parameter in exported data - schedule *schedule name* in domain *domain name* defined with default ACTION value.

Explanation

During processing of command *import command*, an invalid value is encountered for the ACTION parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the default ACTION value for this schedule.

User response

Verify that the correct ACTION value has been used for this schedule. Update this value, if necessary.

ANR07 Import 59E command:
Invalid value for DURUNITS or PERUNITS parameter in exported data - schedule *schedule name* in domain *domain name* defined with default values for DURATION, DURUNITS, PERIOD, and PERUNITS.

Explanation

During processing of command *import command*, an invalid value is encountered for the DURUNITS or PERUNITS parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the default values for DURATION, DURUNITS, PERIOD, and PERUNITS.

User response

Verify that the correct values have been used for

DURATION, DURUNITS, PERIOD, and PERUNITS. Update these values, if necessary.

ANR07 Import 60E command:
Invalid value for DAYOFWEEK parameter in exported data - schedule schedule name in domain domain name defined with default DAYOFWEEK value.

Explanation

During processing of command *import command*, an invalid value is encountered for the DAYOFWEEK parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the default DAYOFWEEK value for this schedule.

User response

Verify that the correct DAYOFWEEK value has been used for this schedule. Update this value, if necessary.

ANR07 Import 61E command:
Invalid value for ACTION parameter in exported data - existing ACTION value for schedule schedule name in domain

domain name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the ACTION parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the existing ACTION value for this schedule.

User response

Verify that the correct ACTION value has been used for this schedule. Update this value, if necessary.

ANR07 Import 62E command:
Invalid value for DURUNITS or PERUNITS parameter in exported data - existing values for DURATION, DURUNITS PERIOD, and PERUNITS for schedule schedule name in domain domain name were not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the DURUNITS or PERUNITS parameter for schedule *schedule name*

in policy domain *domain name*.

System action

Processing of the command continues, by using the existing values for DURATION, DURUNITS, PERIOD, and PERUNITS.

User response

Verify that the correct values have been used for DURATION, DURUNITS, PERIOD, and PERUNITS. Update these values, if necessary.

ANR07 Import 63E command:
Invalid value for DAYOFWEEK parameter in exported data - existing DAYOFWEEK value for schedule schedule name in domain domain name was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the DAYOFWEEK parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the existing DAYOFWEEK value for this schedule.

User response

Verify that the correct DAYOFWEEK value has been used for this schedule. Update this value, if necessary.

ANR07 Import 64E command:
Invalid lock status detected while importing node node name - this node will not be locked.

Explanation

During processing of command *import command*, an invalid value is encountered for the lock status for node *node name*.

System action

Processing of the command continues, but the node is not locked.

User response

An administrator with the proper authorization must issue the LOCK NODE command, if necessary.

ANR07 Import 65E command:
Invalid lock status detected while importing administrator administrator name - this administrator will not be locked.

Explanation

During processing of command *import command*, an invalid value is encountered for the lock status

for administrator
administrator name.

System action

Processing of the command continues, but the administrator is not locked.

User response

An administrator with the proper authorization must issue the LOCK ADMIN command, if necessary.

ANR07 Export 66E command:
Invalid value for TYPE parameter detected while exporting copy group copy group name in domain domain name, set policy set name, management class management class name - system will attempt to assign value during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the TYPE parameter for copy group *copy group name*, in domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Export processing continues, but the exported data contains an unknown TYPE value for this copy group. If this data is imported,

the system attempts to assign a TYPE value based upon values for other copy group parameters.

User response

Delete and define this copy group to eliminate the invalid data, and then restart the export command. Alternatively, use the export data with the unknown value, and the system will attempt to assign a TYPE during import processing.

ANR07 Export 67E command:
Invalid value for MODE parameter detected while exporting copy group copy group name in domain domain name, set policy set name, management class management class name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the MODE parameter for copy group *copy group name* in domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Export processing continues, but the exported data contains

an unknown MODE value for this copy group. If this data is imported, the default or existing MODE value is used.

User response

Update the MODE value for this copy group and restart the export command. Alternatively, use the export data with the unknown value, and check and update the MODE value after import processing has been performed.

ANR07 Export 68E command:
Invalid value for SERIALIZATION parameter detected while exporting copy group copy group name in domain domain name, set policy set name, management class management class name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the SERIALIZATION parameter for copy group *copy group name*, in domain *domain name*, policy set *policy set name*, management class *management class name*.

System action

Export processing continues, but the

exported data contains an unknown SERIALIZATION value for this copy group. If this data is imported, the default or existing SERIALIZATION value is used.

User response

Update the SERIALIZATION value for this copy group and restart the export command. Alternatively, use the export data with the unknown value, and check and update the SERIALIZATION value after import processing has been performed.

ANR07 Export 69E command:
Invalid value for ACTION parameter detected while exporting schedule schedule name in domain domain name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the ACTION parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data will contain an unknown ACTION value for this schedule. If this data is imported,

the default or existing ACTION value is used.

User response

Update the ACTION value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the ACTION value after import processing has been performed.

ANR07 Export 70E command:
Invalid value for DURUNITS parameter detected while exporting schedule name in domain domain name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the DURUNITS parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data contains an unknown DURUNITS value for this schedule. If this data is imported, the default or existing DURUNITS value is used.

User response

Update the DURUNITS value for this schedule

and restart the export command. Alternatively, use the export data with the unknown value, and check and update the DURUNITS value after import processing has been performed.

ANR07 Export 71E command:
Invalid value for PERUNITS parameter detected while exporting schedule name in domain domain name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the PERUNITS parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data will contain an unknown PERUNITS value for this schedule. If this data is imported, the default or existing PERUNITS value is used.

User response

Update the PERUNITS value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the PERUNITS value after

import processing has been performed.

ANR07 Export 72E command:
Invalid value for DAYOFWEEK parameter detected while exporting schedule name in domain domain name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the DAYOFWEEK parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data contains an unknown DAYOFWEEK value for this schedule. If this data is imported, the default or existing DAYOFWEEK value is used.

User response

Update the DAYOFWEEK value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the DAYOFWEEK value after import processing has been performed.

ANR07 Export 73E command:
Invalid lock

status detected while exporting administrator administrator name - this administrator will not be locked during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the lock status for administrator *administrator name*.

System action

Export processing continues, but the exported data contains an unknown lock status for this administrator. If this data is imported, the administrator will not be locked.

User response

An administrator with the proper authorization must issue the LOCK NODE or UNLOCK NODE command to achieve the desired lock status, and then restart the export command. Alternatively, use the export data with the unknown status, and issue a LOCK ADMIN or UNLOCK ADMIN command after import processing has been performed.

ANR07 Export 74E command:
Invalid value for COMPRESSION parameter detected while exporting node node name - default or

existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the COMPRESSION parameter for node *node name*.

System action

Export processing continues, but the exported data contains an unknown COMPRESSION value for this node. If this data is imported, the default or existing COMPRESSION value is used.

User response

Update the COMPRESSION parameter for this node and restart the export command. Alternatively, use the export data with the unknown value, and check and update the COMPRESSION value after import processing has been performed.

ANR07 Export 75E command:
Invalid lock status detected while exporting node *node name* - this node will not be locked during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the lock status for node *node name*.

System action

Export processing continues, but the exported data contains an unknown lock status for this node. If this data is imported, the node will not be locked.

User response

Lock or unlock the node to achieve the desired lock status, and then restart the export command. Alternatively, use the export data with the unknown status, and lock or unlock the node after import processing has been performed.

ANR07 Export 76E command:
Invalid value for ARCHDELETE parameter detected while exporting node *node name* - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the ARCHDELETE parameter for node *node name*.

System action

Export processing continues, but the exported data contains an unknown ARCHDELETE value for this node. If this data is imported, the default or existing ARCHDELETE value is used.

User response

Update the ARCHDELETE parameter for this node and restart the export command. Alternatively, use the export data with the unknown value, and check and update the ARCHDELETE value after import processing has been performed.

ANR07 Export 77E command:
Invalid value for BACKDELETE parameter detected while exporting node *node* - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the BACKDELETE parameter for node *node name*.

System action

Export processing continues, but the exported data contains an unknown BACKDELETE value for this node. If this data is imported, the default or existing BACKDELETE value is used.

User response

Update the BACKDELETE parameter for this node and restart the export command. Alternatively, use the export data with the unknown value, and check and update the BACKDELETE value after

import processing has been performed.

ANR07 Command: Error 78E encountered in accessing data storage - device class *device class name* is not defined.

Explanation

During command *command* processing, an error occurred because the specified device class is not defined.

System action

The command *command* is ended and server operation continues.

User response

Make sure the specified device class is defined.

ANR07 Command: Error 79E encountered in accessing data storage - disk volume specified.

Explanation

During command *command* processing, an error occurred because a specified volume is a disk volume rather than a tape volume.

System action

The command *command* is ended and server operation continues.

User response

Make sure that all volumes specified for the command *command* are tape volumes.

**ANR07 Export/import
80E command:
Process aborted
- a server
communications
session could
not be
established.**

Explanation

The server export/import process encounters an internal error in establishing an intermemory communications session with other server components.

System action

The export or import process ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

If the error is not resolved, contact your service representative.

**ANR07 Export/import
81E command:
Process aborted
- server sign on
failed.**

Explanation

The server export/import process encounters an internal error in establishing an intermemory communications session with other server components.

System action

The export or import process ends and server operation continues.

User response

Contact your service representative.

**ANR07 Export/import
84E command:
Process aborted
- internal error
detected with
the Export/
Import level:
level number.**

Explanation

The server export/import process encounters an internal error in evaluating the export/import level (SERVER, NODE, ADMIN, POLICY).

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR07 Import
85E command:
Invalid record
type xrecord
type read from
export data.**

Explanation

The server export/import process encounters an internal error in reading data from the export media. An invalid record type of *record type* is encountered during the read operation.

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR07 Import
86E command:
Invalid export
version version
number in
exported data.**

Explanation

The server import process encounters an internal error in reading data from the export media. An invalid export version number (*version number*) is encountered during the read operation.

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR07 Import
87E command:
Import of file
space *filesystem
name* in node
node name
aborted by
server (*abort
reason*).**

Explanation

The server import process encounters an internal error in importing file space *filesystem name* for client node *node name*. The reason code *abort reason* is encountered.

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR07 Import
89E command:**

Failure in normalizing transaction identifier for sending to the server.

Explanation

The server import process encounters an internal database transaction error in importing information into the server database.

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Import 90E command: Error in absorbing data records.

Explanation

The server import process encounters an internal error in importing information into the server database.

System action

The export or import process ends and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR07 Import 92E command: Invalid copy type encountered in an imported file space authorization rule for node *node name*, file space *filespace name* - a type of BACKUP will be assumed.

Explanation

During import processing for command *import command*, an invalid copy type is encountered for an authorization rule that grants access for file space *filespace name* on node *node name*. Authorization rules typically specify copy types of backup or archive, depending on whether backup file access or archive file access is granted by the file space owner to other users. Because the imported information for the rule is ambiguous, the server assumes that the rule is for backup data.

System action

The import process continues.

User response

The user for node *node name* should query the access rules for the specified node name after the import process has completed, and correct or delete any access rules that are in error or not needed.

ANR07 Export/import 93E command: Preview processing terminated abnormally - error accessing data storage.

Explanation

The server encountered an internal error in accessing data storage while executing an import or export preview operation.

System action

The export or import operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If you find and resolve the error, retry the export or import operation. If you cannot find the error, contact your service representative for assistance in resolving the problem.

ANR07 Export/import 94E command: Processing terminated abnormally -

error accessing data storage.

Explanation

The server encountered an internal error in accessing data storage while executing an import or export operation.

System action

The export or import operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If the import or export operation involves a session with another server, run the QUERY ACTLOG command to examine messages on the other server as well. Messages on the other server can help you troubleshoot the error on the local server. If you find and resolve the error, retry the export or import operation. If you cannot find the error, contact your service representative for assistance in resolving the problem.

ANR07 Command: Error 95E encountered in accessing data storage - invalid volume name specified.

Explanation

The server encounters an error in accessing data storage while processing command *command*. The

error occurred because an attempt has been made to access a volume with an invalid name.

System action

The command *command* operation is ended and server operation continues.

User response

Issue the command with a valid volume name.

ANR07 Command: Error 96E encountered in accessing data storage - insufficient number of mount points available for removable media.

Explanation

During command *command* processing, the server cannot allocate sufficient mount points.

System action

The command *command* operation is ended and server operation continues.

User response

If necessary, make more mount points available.

ANR07 Command: Error 97E encountered in accessing data storage - required volume was not mounted.

Explanation

During command *command* processing, a

required volume cannot be mounted. The mount request may have been canceled.

System action

The command *command* operation is ended and server operation continues.

User response

Issue the command again and make sure the necessary volumes are accessible.

ANR07 Import 98E command: Error encountered in accessing data storage - volume cannot be used.

Explanation

During import processing, a volume has been mounted but cannot be used.

System action

The import operation is ended and server operation continues.

User response

Query the activity log for messages preceding this one that give additional information. Make sure a usable volume is specified and mounted.

ANR07 Command: Error 99E encountered in accessing data storage - volume already in use.

Explanation

During command *command* processing, a volume cannot be used because it is already defined in a storage pool, or has been previously used by an export, database dump, or database backup operation (as recorded in the volume history) or is in use by another process.

System action

The command *command* operation is ended and server operation continues.

User response

Specify a volume that is not in use or defined in a storage pool, and that has not been previously used for an export, database dump, or database backup operation as recorded in the server volume history information. Use the QUERY VOLUME command to display the names of volumes that are defined to server storage pools. Use the QUERY VOLHISTORY command to display the names of volumes that have been used for export, database dump, or database backup operations.

ANR08 Command 00I command for node node name started as process process ID.

Explanation

A file space deletion process has started to delete one or more file spaces for the specified node. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to the DELETE FILESPACE command entered by an administrator.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR08 DELETE 01I FILESPACE filespace name for node node name started as process process ID.

Explanation

The specified client node has started a file space deletion process (on the server) to delete one or more file spaces. The process has been assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to a request from the client node.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

**ANR08 DELETE
02I FILESPACE
file space name
(backup/archive
data) for node
node name
started.**

Explanation

A background server process has started (on the server) to delete the specified file space belonging to the node indicated. If a file space name is not included in the message, all file spaces belonging to the node are deleted.

System action

The background process deletes backup and archive objects for the specified file space while server operation continues.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

**ANR08 DELETE
03I FILESPACE
file space name
(backup data)**

for node *node
name* started.

Explanation

A background server process has started (on the server) to delete backup objects in the specified file space belonging to the node indicated. If a file space name is not included in the message, then the backup objects for all file spaces that belong to the node are deleted.

System action

The background process deletes backup objects for the specified file space while server operation continues.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

**ANR08 DELETE
04I FILESPACE
file space name
(archive data)
for node *node
name* started.**

Explanation

A background server process has started (on the server) to delete archive objects in the specified file space belonging to the node indicated. If a file space name is not included in the message, then the archive objects for all file

spaces that belong to the node are deleted.

System action

The background process deletes archive objects for the specified file space while server operation continues.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

**ANR08 The deletion for
05I file space name
was canceled
for node *node
name: number of
objects objects
were deleted,
number of
objects objects
were retained,
and number of
objects objects
were skipped.***

Explanation

A background server process that was deleting file space data for the specified node was canceled by the CANCEL PROCESS command. The numbers of objects deleted, retained and skipped before the cancel ended the operation are reported in the message.

System action

Server operation continues, but the server process is ended.

User response

No action is required. An authorized administrator can issue the DELETE FILESPACE command to delete remaining objects from the file space.

**ANR08 File space
06I file space name
was deleted for
node *node
name: number of
objects objects
were deleted,
number of
objects objects
were retained,
and number of
objects objects
were skipped.***

Explanation

A server process deleted file space data for the specified node. The numbers of deleted, retained, and skipped objects are reported in the message.

System action

The deletion process is complete, but server operations continue.

User response

No action is required.

**ANR08 Inventory client
11I file expiration
started as
process *process
ID.***

Explanation

The server has started roll-off processing to remove expired client backup and archive file copies, based on the management class policy that is bound to the files. The copy group retention

and version parameters for each file's copy group are used by the server to determine if copies are to be deleted from the server. The expiration process was started as process number *process ID*, and may be queried or canceled with the QUERY PROCESS or CANCEL PROCESS commands, respectively.

System action

The expiration process is now cancellable. Server operation continues.

User response

None.

ANR08 12I Inventory expiration process *process ID* is completed: processed *number of nodes* nodes, examined *number of objects* objects, retained *number of objects* objects, deleted *number of backup objects* backup objects, *number of archive objects* archive objects, *number of DB backup volumes* database backup volumes, and *number of recovery plan files* recovery plan files. *retry count* objects were retried, *error count* errors were detected, and

skipped count objects were skipped. *number of deleted retention bitfiles* retention bitfiles were deleted from retention pools.

Explanation

The following information is displayed in the message:

- -The numbers of client objects examined, deleted, and retained, based on management class policy.
- -The total error count.
- -The number of objects that were skipped because replication is required.
- -The number of retention bitfiles that were deleted from retention pools.

The number of database backup volumes that were deleted by the specified process is based on the value specified by the SET DRMDBBACKUPEXPIREDAYS command. The number of recovery plan files that were deleted is based on the value specified by the SET DRMRPFEXPIREDAYS command.

System action

Server operation continues, but the roll-off process is ended.

User response

If the error count is not equal to 0, examine messages that might have been issued in the activity

log to determine the cause of the errors.

ANR08 13I Inventory expiration process *process ID* was canceled prior to completion: processed *number of nodes* nodes, examined *number of objects* objects, retained *number of objects* objects, deleted *number of backup objects* backup objects, *number of archive objects* archive objects, *number of DB backup volumes* database backup volumes, and *number of recovery plan files* recovery plan files, retried *retry count* objects, detected *error count* errors, and skipped *skipped count* objects. *number of deleted retention bitfiles* retention bitfiles were deleted from retention pools.

Explanation

The inventory expiration process was canceled by an administrator. The following information is displayed in the message:

- -The number of objects examined, deleted, and

retained prior to the cancellation.

- -The total error count and number of skipped objects.
- -The number of retention bitfiles that were deleted from retention pools by the specified process.

System action

The server ends the file expiration process.

User response

No action is required.

ANR08 14I The deletion process for file space *filespace name* for node *node name* is complete, but not all objects were deleted. *number of objects* objects were deleted, *number of objects* objects were changed to retained state, and *number of objects* objects were skipped.

Explanation

A DELETE FILESPACE command has deleted file space data for the specified node, but did not delete every object belonging to the file space. The numbers of objects that were deleted, changed to have a state of retained, and skipped are reported in the message.

System action

The deletion process is complete, but server operations continue.

User response

To determine why objects could not be deleted, review other messages issued by the process. If necessary, correct the problems and run the command again.

**ANR08 Cancel in
19I progress**

Explanation

This message is displayed in response to a QUERY PROCESS command, and indicates that an inventory expiration process has been canceled. The process will end shortly.

System action

The expiration process terminates and server operation continues.

User response

None.

**ANR08 Sorting
20I information for
number objects
has been
deleted.**

Explanation

A background server process has deleted sorting information for *number* files from the server database. This process is started during initialization to remove any sorting information which is left over from previous export operations.

System action

The actual backup or archive objects were not deleted, but only information used to sort these objects during the previous export operation.

User response

None.

**ANR08 Filespace
21E identifier *fsId* is
not valid.**

Explanation

The identifier assigned for a file space is out of range.

System action

The file space is not added.

User response

Contact your service representative.

**ANR08 command:
22I Filespace
filespace name
(*fsId=filespace
id*) successfully
renamed to new
filespace name
for node *node
name*.**

Explanation

The file space specified was renamed to the new name specified for the node. This message is displayed in response to successful completion of the RENAME FILESPACE command.

System action

The system renames the file space for the node as indicated

User response

None.

**ANR08 command:
23E Filespace
filespace name
cannot be
renamed to new
filespace name,
a file space with
this name
already exists
for node *node
name*.**

Explanation

The file space name specified as a target name for the command was found to already exist for the node specified. The command fails.

System action

Server operation continues, the command fails.

User response

Reissue the command with a different target file space name

**ANR08 Delete Filespace
24I *filespace name*
(space-
managed data)
for node *node
name* started.**

Explanation

A background server process has started (on the server) to delete space-managed objects in the specified file space belonging to the node indicated. If a file space name is not included in the message, then the space-managed objects for all file spaces that belong to the node are deleted.

System action

The background process deletes space-managed objects for the specified file space while server operation continues.

User response

To obtain status on the file space deletion process, issue the QUERY PROCESS command. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

**ANR08 DELETE
26I FILESPACE
filespace name
for node *node
name*
encountered a
transaction
failure.**

Explanation

A background server process that has been deleting file space data for the indicated node encountered a transaction failure.

System action

The server process is retried if the maximum number of retry attempts have not been exceeded.

User response

Transaction failure usually indicates that a database deadlock was detected during file space deletion. These deadlock conditions are sometimes encountered when multiple file space deletion processes are running at the same time. No action is required

unless the DELETE FILESPACE terminates without completing the deletion process (see message ANR0828).

ANR08 27I DELETE FILESPACE
filesystem name will be retried for node node name.

Explanation

A file space deletion process for the node indicated is being retried because an error was encountered.

System action

The server process is retried.

User response

None.

ANR08 28W The deletion of filesystem name for node node name ended before completion due to transaction failure: number of objects objects were deleted, number of objects objects were retained, and number of objects objects were skipped.

Explanation

A background server process that was deleting file space data for the specified node is ended prematurely because of a transaction failure. A transaction failure usually indicates a database deadlock

was detected during file space deletion. These deadlock conditions can occur when multiple file space deletion processes run at the same time. The numbers of objects deleted, retained, and skipped before the DELETE FILESPACE operation ended are reported in the message.

System action

Server operation continues, but the server process is ended.

User response

To resolve the problem, take one or both of the following actions:

- -Restart the command when fewer file space deletion processes are active.
- -Issue the DELETE FILESPACE command to delete remaining files in the file space or file spaces.

ANR08 29E Command: Invalid combination of TYPE and DATA parameters.

Explanation

The specified command has been issued with an invalid combination of the TYPE and DATA parameters. DATA=IMAGES can only be specified if TYPE=ANY or TYPE=BACKUP.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid combination of parameters.

ANR08 30W Management class class name in domain domain name used by node node name in file space filesystem name is no longer active, or no longer has a BACKUP copy group: DEFAULT management class attributes will be used for expiration.

Explanation

During policy roll-off processing, the server has found a client file copy whose management class or backup copy group no longer exists.

System action

The server obtains the DEFAULT management class for the specified domain and uses its backup copy group version and retention parameters to determine if file copies need to be expired.

User response

No action is required. A policy administrator with authority over the specified domain may use the DEFINE COPYGROUP, DEFINE MGMTCLASS, and ACTIVATE POLICY commands to define and activate a policy set that contains definitions for

the missing management class or copy group.

ANR08 31W The DEFAULT management class class name in domain domain name does not have a BACKUP copy group: GRACE PERIOD will be used for expiration.

Explanation

During policy roll-off processing, the server found a client file copy whose management class or backup copy group no longer exists. The DEFAULT management class for the indicated policy domain does not contain a backup copy group; therefore, the server uses the GRACE PERIOD retention value defined for the specified policy domain to determine if client file copies need to be expired and removed from the server database.

System action

The server obtains the GRACE PERIOD retention values for the specified domain and then determines if backup file copies need to be expired.

User response

No action is required. A policy administrator with authority over the specified domain may use the DEFINE COPYGROUP, DEFINE MGMTCLASS, and ACTIVATE POLICY commands to define and activate a policy set that

contains definitions for the missing management class or backup copy group.

ANR08 32W Management class *class name* in domain *domain name* used by node *node name* in *filesystem* *filesystem name* is no longer active, or no longer has an **ARCHIVE** copy group: **DEFAULT** management class attributes will be used for expiration.

Explanation

During policy roll-off processing, the server found a client file copy whose management class or archive copy group no longer exists.

System action

The server obtains the **DEFAULT** management class for the specified domain and uses its archive copy group retention parameter to determine if file copies need to be expired.

User response

No action is required. A policy administrator with authority over the specified domain may use the **DEFINE COPYGROUP**, **DEFINE MGMTCLASS**, and **ACTIVATE POLICY** commands to define and activate a policy set that contains definitions for the missing management class or copy group.

ANR08 33W The **DEFAULT** management class *class name* in domain *domain name* does not have an **ARCHIVE** copy group: **GRACE PERIOD** will be used for expiration.

Explanation

During policy roll-off processing, the server found a client file copy whose management class or archive copy group no longer exists. The **DEFAULT** management class for the indicated policy domain does not contain an archive copy group; therefore, the server uses the **GRACE PERIOD** retention value defined for the specified policy domain to determine if client file copies need to be expired and removed from the server database.

System action

The server obtains the **GRACE PERIOD** retention values for the specified domain and then determines if archive file copies need to be expired.

User response

No action is required. A policy administrator with authority over the specified domain may use the **DEFINE COPYGROUP**, **DEFINE MGMTCLASS**, and **ACTIVATE POLICYSET** commands to define and activate a policy set that contains definitions for the missing management

class or backup copy group.

ANR08 34W Inventory client file expiration cannot start because of insufficient memory - will retry in *number of seconds* seconds.

Explanation

The server inventory expiration process is pausing to retry an operation that failed because sufficient memory is not available on the server.

System action

Server operation continues; the expiration process will be retried after the stated delay.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR08 35W Management class *class name* in domain *domain name* is no longer active, or no longer has a **BACKUP** copy group, or no longer has an **ARCHIVE** copy group. **DEFAULT** management class used to delete *number of backup files* backup files and *number of archive files* archive files. Retention grace

period used to delete *number of backup files* backup files and *number of archive files* archive files.

Explanation

During policy roll-off processing, the server found a management class or backup copy group or archive copy group that no longer exists. When a management class or backup copy group no longer exists, the number of backup client file copies that have been deleted using the default management class or the retention grace period is displayed in the message. When a management class or archive copy group no longer exists, the number of archive client files that have been deleted using the default management class or the retention grace period is displayed in the message.

System action

The server obtains the **DEFAULT** management class for the specified domain and uses its backup copy group or archive copy group version and retention parameters to determine if file copies need to be expired. If, however, the needed backup copy group or archive copy group does not exist in the **DEFAULT** management class, the server will use the retention grace period for the domain.

User response

No action is required. This message is only issued when expiration processing has been started with the QUIET option to suppress detailed messages. Expiration processing can be started without the QUIET option to see the detailed messages which will indicate specific node and filespaces and will further distinguish between backup and archive copy groups. A policy administrator with authority over the specified domain may use the DEFINE COPYGROUP, DEFINE MGMTCLASS, and ACTIVATE POLICY commands to define and activate a policy set that contains definitions for the missing management class or copy group.

ANR08 36W No query restore processing session *session id* for node *node name* and *filesystem name* failed to retrieve file *high-level file name* low-level file name - file being skipped.

Explanation

The no query restore processing for the session listed relating to the specified node name and filesystem failed to retrieve the specified file. An error occurred while retrieving this file so it will be skipped.

System action

The no query restore operation continues.

User response

Determine the cause of the file retrieve failure and correct it. After this situation is correct, the client can do a restore of the specific file that was skipped.

ANR08 37I Inventory expiration process *process ID* was terminated after exceeding the duration limit of *duration* minutes: processed *number of nodes* nodes, examined *number of objects* objects, retained *number of objects* objects, deleted *number of backup objects* backup objects, *number of archive objects* archive objects, *number of DB backup volumes* database backup volumes, and *number of recovery plan files* recovery plan files, retried *retry count* objects, detected *error count* errors, and skipped *skipped count* objects. *number of deleted retention bitfiles* retention

bitfiles were deleted from retention pools.

Explanation

The EXPIRE INVENTORY command was issued with the DURATION parameter. The value specified for the DURATION parameter is the number of minutes allotted for the inventory expiration process. When the specified number of minutes is reached, the inventory expiration process ends.

System action

The expire inventory process ends.

User response

No action is required.

ANR08 38I Session *session number* started for server *server name* (server's platform) (communication method connection info) for purpose on *hostAddr: hostPort*.

Explanation

A new server session has been initiated by the specified server for the specified purpose. The session number, server's platform type and communication method used by this session are included in the message.

System action

The server begins a communications

session to service the administrator client.

User response

None.

ANR08 39I Session *session number* started for node *node name* (client platform) (communication method communication address) on *hostAddr: hostPort*.

Explanation

A new client session has been initiated by the specified node. The session number, client platform type, communication method and address used by this session are included in the message.

System action

The server begins a communications session to service the client node.

User response

None.

ANR08 40I Session *session number* started for administrator *administrator ID* (administrator's platform) (communication method communication address) on *hostAddr: hostPort*.

Explanation

A new administrator client session has

been initiated by the specified administrator. The session number, administrator's platform type, communication method and address used by this session are included in the message.

System action

The server begins a communications session to service the administrator client.

User response

None.

ANR08 44E *Command: node name is not a backup-archive node.*

Explanation

The specified node name is not a backup-archive node.

System action

Processing fails for the command. Server operation continues.

User response

Reissue the command with a valid node name.

ANR08 48W *Expiration failed to delete file type file name for node node name and file space file space name - file will be skipped.*

Explanation

The expiration process was unable to delete the indicated file. The file will be skipped by expiration.

System action

The expiration process continues.

User response

Try expiration again to determine if the cause of the deletion failure was an intermittent problem or if it is a permanent problem. If after a subsequent expiration attempt the file still is not deleted, contact your service representative.

ANR08 49E *Command: Not permitted for node Node Name - node of type SERVER.*

Explanation

The indicated DELETE FILESPACE process is not started because the node specified is of NODETYPE=SERVER. A DELETE FILESPACE may only be processed for nodes of this type with the TYPE=SERVER parameter specified.

System action

The DELETE FILESPACE command is ended and server processing continues.

User response

If this file space must be deleted, Reissue the command with the TYPE parameter set to TYPE=SERVER. Please use caution when using the TYPE=SERVER parameter as this can impact the availability of data for the server that owns these files.

ANR08 50E *Command: Cannot Start process name Process.*

Explanation

The indicated DELETE FILESPACE process cannot be started on the server.

System action

The DELETE FILESPACE command is ended and server processing continues.

User response

This usually indicates that sufficient server memory is not available on the server.

See the documentation for the operating system about how to increase memory for an application.

ANR08 51E *Cannot start delete file space thread for node node name.*

Explanation

The indicated DELETE FILESPACE process cannot be started on the server. Sufficient memory on the server may not be available.

System action

The DELETE FILESPACE command is ended and server processing continues.

User response

See the documentation for the operating system about how to

increase memory for an application.

ANR08 52E *Command: No matching file spaces found for node node name.*

Explanation

The server did not find any file spaces for the node indicated matching the names specified in the command.

System action

The server ends the command.

User response

Enter the command with file space names that refer to defined file spaces for the specified node. Note that file space names are case sensitive. Enter them by using exactly the same uppercase and lowercase characters that match the file space name defined on the server. Use the QUERY FILESPACE command to determine which file spaces are defined for a node on the server.

ANR08 53E *Transaction failed in file space deletion, DELETE FILESPACE process aborted.*

Explanation

A database transaction fails while the server is deleting file space data.

System action

The server ends the file space deletion process.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR08 Inventory file
54E space query
failure, DELETE
FILESPACE
process
aborted.**

Explanation

The server encounters an error in querying the inventory database during a file space deletion process.

System action

The server ends the file space deletion process.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR08 Server LOG
55E space
exhausted,
DELETE**

**FILESPACE
process
aborted.**

Explanation

Insufficient server log space has been encountered during file space deletion processing.

System action

The server ends the file space deletion process.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

**ANR08 Server database
56E space**

**exhausted,
DELETE
FILESPACE
process
aborted.**

Explanation

Insufficient server database space has been encountered during file space deletion processing.

System action

The server ends the file space deletion process.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

**ANR08 The server is
57I attempting to
rerun one or
more retention
set creation jobs
that did not run
on schedule or
that started
running and
failed.**

Explanation

One or more retention rules were defined to create retention sets. However, one or more of the scheduled jobs did not run on time or failed. Retry attempts are triggered by inventory expiration processes to ensure that files that must be included in retention sets do not expire as a result of the retention rule not running.

System action

System operation continues.

User response

No action is required.

**ANR08 Data storage
59E object erasure
failure, DELETE
FILESPACE
process
aborted.**

Explanation

The server encounters an error in removing file copies from data storage during file space deletion processing.

System action

The server ends the file space deletion process.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR08 Expiration
60E process process
ID ended due to
an internal
error: examined
number of
objects objects,
retained number
of objects
objects, deleted
number of
backup objects
backup objects,
number of
archive objects**

archive objects, number of DB backup volumes database backup volumes, and number of recovery plan files recovery plan files. retry count objects were retried and error count errors were detected.

Explanation

The server detected an internal error during file expiration processing. The numbers of files that were examined and deleted prior to the error are reported. A total error count is also displayed.

System action

The server ends the expiration process.

User response

Examine the server messages that are issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If you cannot resolve the error, contact IBM Software Support.

ANR08 Transaction 61E failed in expiration, inventory expiration aborted.

Explanation

The server encounters a database transaction

failure during policy roll-off processing.

System action

The server ends roll-off processing.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 Expiration 65E processing failed - internal server error.

Explanation

Server retry processing during policy roll-off fails.

System action

The server ends policy roll-off processing.

User response

Issue the QUERY ACTLOG command to view the activity log and search for messages. Examine the server messages issued prior to this message to determine the source of the error.

The following issues can cause this message to occur:

- The server is out of database space. To increase the amount of database space that is available to the server, issue the EXTEND

DBSPACE command to add one or more directories to the database.

- The server is out of log space. To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full. Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.
- The server is low on memory. To increase the amount of memory that is available to the server, see the operating system documentation that describes how to increase memory for an application.

If the error cannot be isolated and resolved, contact your service representative.

ANR08 Expiration 66E processing retries failed - no success after maximum retries retries.

Explanation

Server policy roll-off processing ends because retry processing has not been successful in expiring client file copies from the server database.

System action

The server ends policy roll-off processing and server operation continues.

User response

Issue the QUERY ACTLOG command to view the activity log and search for messages. Examine the server messages issued prior to this message to determine the source of the error.

The following issues can cause this message to occur:

- The server is out of database space. To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.
- The server is out of log space. To increase the amount of log space that is available to the server, evaluate the directories and file

systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full. Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

- The server is low on memory. To increase the amount of memory that is available to the server, see the operating system documentation that describes how to increase memory for an application.

If the error cannot be isolated and resolved, contact your service representative.

ANR08 67E Unable to open policy domain for node *node name* during server operation.

Explanation

Policy roll-off processing on the server encounters an error while obtaining policy information related to the specified node.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 68E Cannot find management class name for ID *management class ID*.

Explanation

Policy roll-off processing on the server encounters an error while obtaining policy information.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search

for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 69E Cannot find policy domain for node *node ID*.

Explanation

Policy roll-off processing on the server encounters an error while obtaining policy information related to the specified node.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 70E Cannot find node name for node *node ID*.

Explanation

Policy roll-off processing on the server encounters a database error in obtaining information for a client node.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 71E Cannot find file space name for node *node ID*, file space *file space ID*.

Explanation

Policy roll-off processing on the server encounters a database error in obtaining information for a client node.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 72E Grace Period retention for domain *domain name* could not be obtained.

Explanation

Policy roll-off processing on the server encounters a database error in obtaining GRACE PERIOD values for the specified policy domain.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 Invalid copy type encountered in expiring files: copytype ID

Explanation

Policy roll-off processing on the server encounters a database error in obtaining copy group information.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG

command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 Backup object not found during inventory processing.

Explanation

Inventory processing on the server encounters a database error in obtaining backup information in data storage.

System action

The server ends roll-off processing, or client session(s) and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 Archive object object.ID not found during expiration processing.

Explanation

Policy roll-off processing on the server encounters a database error in obtaining archive information in data storage.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 Replication of node node list completed. Snapshots current: snapshots current. Snapshots replicated: snapshots replicated of snapshots to replicate. Amount replicated: amount replicated. Amount transferred: amount transferred. Elapsed time: elapsed time.

Explanation

The replication process has completed. The meanings of the numbers are:

- Snapshots current indicates the number of snapshots that do not need to be replicated.
- Snapshots replicated indicates the number of

snapshots successfully replicated out of the number of snapshots that we attempted to replicate.

- Amount replicated indicates the size of the snapshots that were replicated
- Amount transferred indicates the number of bytes transferred for the snapshots that were replicated. For compressed snapshots, the number of bytes transferred is the compressed size in bytes. The total number of bytes transferred can be less than the amount replicated if data deduplication or compression is used to reduce the amount of data transferred.
- Elapsed time indicate how long the process ran

System action

None.

User response

None.

ANR08 Error opening inventory file space query.

Explanation

Policy roll-off processing on the server encounters a database error in accessing inventory information.

System action

The server ends roll-off processing and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR08 80E *Filespace command: No matching file spaces.*

Explanation

The server did not find any file space names matching the specifications entered in the *filespace* command.

System action

Server operation continues.

User response

Use the QUERY FILESPACE command to determine which file spaces are defined on the server. Note, that file space names are case sensitive. Reissue the file space command and specify the proper file space name (in proper case).

ANR08 81E *Policy Error : the GRACE PERIOD archive retention value could not be obtained for domain domain ID during client inventory processing.*

Explanation

The server encounters an internal error in accessing policy information.

System action

The operation is ended and server operation continues.

User response

Contact your service representative.

ANR08 82E *Policy Error: Unable to open policy domain for node node name during client inventory query processing.*

Explanation

The server encounters an internal error in accessing policy information.

System action

The client operation is ended and server operation continues.

User response

Contact your service representative.

ANR08 83E *Cannot obtain node name for node node ID.*

Explanation

The server encounters an internal error in accessing client node information.

System action

The operation is ended and server operation continues.

User response

Contact your service representative.

ANR08 84E *Error code during deletion of sorting information for number objects.*

Explanation

A background server process encountered an internal error after deleting sorting information for *number* files from the server database. This process is started during initialization to remove any sorting information which is left over from previous export operations.

System action

The backup or archive objects were not deleted. Only the information used to sort these objects during the previous export operation was deleted. The background process was terminated before all sorting information had been deleted. The system will not perform further export processing of file data until this problem has been resolved.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. Then restart the server. If the error cannot be isolated and

resolved, contact your service representative.

ANR08 85I *Import command: Processing management class management class name for domain domain name and policy set policy set name as management class new management class name.*

Explanation

The background import process to service the command *import* command is currently processing the policy information for management class *management class name* in domain *domain name* and policy set *policy set name*. The management class is imported under the name *new management class name*. During import processing, management classes defined as either DEFAULT or GRACE_PERIOD must be renamed so that the management class does not conflict with existing server policy conventions. Import processing is then able to import file data by using the renamed management class.

System action

Import processing for the command continues.

User response

None. However, an administrator may want

to examine the policy definitions for *new management class name* so they are aware of the management classes that may be used if the policy set containing this management class is activated.

ANR08 86E Management class *class name* in domain *domain name* used by node *node name* in file space *file space name* has no BACKUP copy group with id *copy group id*; Expiration will not be performed for files from this node and file space that are bound to this management class and copy group id.

Explanation

During policy roll-off processing, the server finds a client file copy with a management class or a backup copy group that no longer exists.

System action

The server skips the files in error.

User response

For programming support, contact your service representative.

ANR08 87E Management class *class name* in domain *domain name* used by node

node name in file space *file space name* has no archive copy group with id *copy group id*. Server operation will not be performed for files from this node and file space that are bound to this management class and copy group id.

Explanation

During policy roll-off processing, the server finds a client file copy with a management class or an archive copy group that no longer exists.

System action

The server skips the specified files.

User response

For programming support, contact your service representative.

ANR08 88E SQL commands cannot be issued from the server console.

Explanation

An SQL command was issued from the server console. SQL commands cannot be issued from the server console because they may require a long time complete and the server console should be available to control other server functions.

System action

The server ignores the command and continues processing.

User response

Issue the SQL command from an administrative client.

ANR08 89I Deleted count statistics reports about data deduplication for node *node name*.

Explanation

The server processed DELETE DEDUPSTATS for the specified node, with the total number of deleted statistics reports about data deduplication specified in this message.

System action

The deletion of data deduplication statistics is complete for the node, and server operations continue.

User response

None.

ANR08 90I Export/import command: Processing optionset *optionset name*.

Explanation

The background export or import process to service the command *export/import command* is currently processing optionset definition information.

System action

Export or import processing for the command continues.

User response

None.

ANR08 91I Export/import command: Copied *number* optionset definitions.

Explanation

The background export or import process to service the command *export/import command* copies *number* client optionset definitions from the server database to export media or from export media into the server database. Data is not moved if Preview=Yes is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR08 92I Export command: No matching optionsets found for exporting.

Explanation

The background export process does not find any client optionsets for *export command*.

System action

The export process continues and no option sets from the server.

User response

None.

ANR08 93I Are you sure that you want to accept the current system date as valid ?

Explanation

This message is displayed when the ACCEPT DATE command has been issued to confirm that you want to accept the date on the system as valid. Accepting an invalid date can cause any of the following problems:
Premature deletion of data
Excessive retention of data
Scheduling problems
Event record problems
Password expiration problems.

System action

The command waits for you to confirm the action.

User response

Specify Yes if you want to accept the system date as valid, or No if you do not want to execute the command.

ANR08 94I Current system date has been accepted as valid.

Explanation

This message is displayed when the ACCEPT DATE command has been

issued and the date has been accepted as valid by the server.

System action

The current system date is accepted as valid by the server. The server will begin processing using the current system date.

User response

Issue the ENABLE SESSIONS ALL command to allow client, server and administrative sessions to start.

ANR08 95E Command: Cannot Start process name Process.

Explanation

The indicated process cannot be started on the server.

System action

The specified command is ended and server processing continues.

User response

This usually indicates that sufficient server memory is not available on the server.

See the documentation for the operating system about how to increase memory for an application.

ANR08 96I Generated count statistics reports about data deduplication for node node name in pool pool name.

Explanation

The server processed GENERATE DEDUPSTATS for the specified node and pool, with the total number of generated statistics reports about data deduplication specified in this message.

System action

The generation of data deduplication statistics is complete for the node and pool specified in the command, and server operations continue.

User response

None.

ANR08 97E The DELETE FILESPACE command is not permitted for node node name because the node is an OSSMClient node.

Explanation

Filespace data for OSSM client nodes are managed by the IBM Storage Protect Plus server.

System action

Server operation continues, but the command is not processed.

User response

On the IBM Storage Protect Plus server, expire the restore points for the associated job sessions. The filesystem for the OSSM client node is deleted during the next

run of the maintenance job.

ANR09 00I Processing options file filespec.

Explanation

At server initialization, the server is reading the server options file whose name is shown in the message.

System action

The server reads and processes the options in this file.

User response

None.

ANR09 01W Invalid option statement found in file filespec.

Explanation

While processing the server options file named, the server has encountered an invalid statement. The invalid statement type is shown in the message. The lines following this message provide more information.

System action

The server ignores the statement in error. Server initialization continues. The default value is used for any missing or ignored options.

User response

Ignore the error, or use a text editor to correct the error and restart the server.

ANR09 02W Unsupported keyword or

invalid value found in file *filespec*.

Explanation

While processing the server options file named, the server has encountered an invalid keyword or an invalid value on an option statement. The lines following this message provide more information.

System action

The server ignores the option statement in error. Server initialization continues. The default value is used for any missing or ignored options.

User response

Ignore the error, or use a text editor to correct the error and restart the server.

ANR09 Message 03W number *message number* will not be written to the activity log.

Explanation

Because of a server option setting, the specified message will not be included in the Activity Log database table on the server. However, you can obtain information about this message from other event receivers, such as the server console, or from a file in which event information is saved. For more information about routing event information to a file, see

the documentation for the FILETEXTEXIT server option.

System action

Server operation continues.

User response

No action is required.

ANR09 Message 04W number *message number* cannot be suppressed from the activity log.

Explanation

The specified message number is ignored, and the message will not be excluded from the activity log.

System action

Server operation continues.

User response

To exclude a message, select a different message number when you specify the option.

ANR09 Options file 05W *filespec* not found.

Explanation

At server initialization, the server is unable to locate the server options file named.

System action

The server uses the default values for all options. Server initialization continues.

User response

If the default values are acceptable, ignore the error. Otherwise, move a valid server options file to the proper location, rename a valid options file to the proper name, or use a text editor to build the proper server options file, and then restart the server.

ANR09 Obsolete option 09I *option name* is ignored.

Explanation

The specified option is no longer supported and is ignored.

System action

Server operation continues.

User response

Remove the obsolete option from the server options file.

ANR09 Diagnostic(ID): a 14E request failed because object (*object name*), size (*size*), exceeds the maximum size of *maximum size*.

Explanation

The size of the specified object exceeds the maximum size defined for that object. The server cannot handle the new object.

System action

The activity that generated this error fails.

User response

Determine why the new object's length exceeds the maximum specified for the object. Reduce the length of the object.

ANR09 Unable to open 15E language *language name* for message formatting.

Explanation

The server is unable to open the specified message repository.

System action

Server initialization continues with the default message repository.

User response

Ensure that a valid language is specified in the LANGUAGE option of the server options file. If a change is made to the options file, restart the server to activate changes.

ANR09 Product Name 16I distributed by *Company* is now ready for use.

Explanation

The server has completed startup processing and is now ready for use.

System action

None.

User response

None.

ANR09 Session session 17W *number* for node *node name*

*(client platform)
- in domain
domain name
failed because
of policy length.*

Explanation

The client cannot handle very long policies.

System action

The client operation is ended and server operation continues.

User response

Upgrade the client to the latest level, or activate a policy set with fewer management classes.

**ANR09 Inventory
18E operation for
node node name
terminated -
lock conflict.**

Explanation

During the indicated operation, the server needs to obtain a lock that is not available.

System action

The indicated operation ends.

User response

Restart the operation.

**ANR09 Filespace name
19E fsName with
length length
was
encountered for
nodes node list.**

Explanation

The specified filespace name was found for the nodes in the list. The name is not allowed.

The error may occur while processing an administrative command or client request.

System action

Server processing continues.

User response

If the error occurs during processing for an administrative command such as EXPORT NODE or RENAME FILESPACE, rename the filespace for the nodes in the list using a valid name. If found while processing a client request, contact your service representative.

**ANR09 Tracing is now
20I active to
standard
output.**

Explanation

In response to a TRACE START command, server trace records are being written to the standard output destination (usually the server console).

System action

None.

User response

None.

**ANR09 Tracing is now
21I active to file file
spec.**

Explanation

In response to a TRACE START command, server trace records are being written to the file named.

System action

None.

User response

None.

**ANR09 Trace ended.
22I**

Explanation

In response to a TRACE END command, server trace records are no longer being written.

System action

None.

User response

None.

**ANR09 Tracing is
23E inactive.**

Explanation

A TRACE END command has been entered, but tracing is not active.

System action

The command is ignored.

User response

If tracing is desired, use the TRACE ENABLE and TRACE START commands to activate server tracing.

**ANR09 Tracing is
24E already active
to file file spec.**

Explanation

A TRACE BEGIN command has been entered, but tracing is already active to the file named.

System action

The command is ignored.

User response

If the current trace output file is acceptable, no action is required. Otherwise use the TRACE END command to stop tracing and then reissue the TRACE BEGIN command as desired.

**ANR09 Tracing is
25E already active
to standard
output.**

Explanation

A TRACE BEGIN command has been entered, but tracing is already active to the standard output destination (usually the server console).

System action

The command is ignored.

User response

If the current trace output destination is acceptable, no action is required. Otherwise use the TRACE END command to stop tracing and then reissue the TRACE BEGIN command as desired.

**ANR09 command name:
26E The
MERGEFILESPA
CES=YES
parameter value
cannot be
specified for file
spaces that
have data in
retention sets.**

Explanation

During an IMPORT NODE or the IMPORT SERVER operation, the server detected a file space that has retention set data associated with it. When you issue the IMPORT NODE or IMPORT SERVER command, the MERGEFILESPPACES=YES parameter value cannot be specified for file spaces that have data that is included in retention sets.

System action

Server operation continues, but the import command fails.

User response

To resolve the issue, complete the following steps:

1. To determine which file spaces have data in retention sets, issue the QUERY RESET command.
2. To import data from file spaces that have data in retention sets, issue the IMPORT NODE command for those file spaces and specify the MERGEFILESPPACES=N O parameter value.

ANR09 Unknown trace 27E class keyword - class.

Explanation

A TRACE ENABLE command has been entered which specifies an unknown trace class.

System action

The command is ignored.

User response

Reissue the TRACE command with the correct class.

ANR09 Unable to open 28E trace file file spec for appending.

Explanation

A TRACE BEGIN command specifies an output file, but the server cannot write to that file.

System action

The command is ignored.

User response

Check the file for proper access permissions, or reissue the TRACE command specifying a different output file.

ANR09 Insufficient 29E memory to activate tracing.

Explanation

A TRACE BEGIN command has been entered, but the server has insufficient memory available to activate tracing.

System action

The command is ignored.

User response

If tracing is required, make more memory available to the server then restart the server.

ANR09 Session session 36E ID for session name failed sending verb verb name

because client not able to handle extended qualifier attribute.

Explanation

A server was going to send the reported verb for the indicated session but was not able to send it. The verb could not be sent to the client because it contains extended information about the low-level qualifier. The extended low-level qualifier is used to store names up to 512 bytes in length. The client that this verb was supposed to be sent to does not support the extended low-level qualifier information.

System action

The send of the verb to the reported session fails and this server operation will fail and report a communication error.

User response

The client session reported needs to have the installed client upgraded to IBM Storage Protect version 5.1.5 or higher in order to support the extended low-level qualifier.

ANR09 Expiration 37I process process ID is ending.

Explanation

The expiration process referenced is ending either because it has been cancelled or because it has completed

the necessary actions. This message is only issued in the case where expiration was processing a long-running operation, such as deleting a group of related files (for example, a backup group). This message indicates the time when the long-running operation ended.

System action

None.

User response

None.

ANR09 Error error code 39E occurred while locating base object (baseId) for subfile (subfileId): Node node name, File space filespace name, Type file type, File name file name.

Explanation

Export processing did not find the base object for the specified subfile. Export processing does not continue.

System action

Export processing stops. Server operation continues.

User response

Audit the database to correct the entries.

ANR09 Cancel request 40I accepted for process process ID.

Explanation

A CANCEL PROCESS command has been entered for the specified process. Some processes will experience a delay before they terminate. This delay may be lengthy for processes that involve remote data movement.

System action

None.

User response

None.

ANR09 Command: 41I **Cancel for process process ID is already pending.**

Explanation

A CANCEL PROCESS command has been entered for the specified process, but a cancel is already pending for that process.

System action

The server ignores the command.

User response

None.

ANR09 Command: 42E **Process process ID cannot be found.**

Explanation

A CANCEL PROCESS command has been entered for the specified process, but the process is not active. Either the process has already ended or the wrong

process number has been entered.

System action

The server ignores the command.

User response

If the wrong process number has been entered, reissue the command with the correct process number.

ANR09 Command: 43E **Process process ID could not be canceled.**

Explanation

A CANCEL PROCESS command has been entered for the specified process, but the process specified is an automatic process, such as migration or reclamation, that cannot be canceled.

System action

The server ignores the command.

User response

If the process is a REPLICATE NODE process and is on the target server, it cannot be canceled if the process is in progress and the source server is available. The target server monitors communications with the source server. If 5 minutes have expired since the last communications, the target server assumes that the source server is no longer available, and the process is canceled. To view the length of time during which the process

has been idle, issue the QUERY PROCESS command and specify the process ID for the replication process.

ANR09 Command: No 44E **active processes found.**

Explanation

A QUERY PROCESS command has been entered, and no processes are active.

System action

The server ignores the command.

User response

None.

ANR09 Archive 46E **processing fails: Object objId not found.**

Explanation

Archive processing fails because the specified object was not found. An archive request is completed in stages. The object may have been deleted by an archive delete request, delete file space or expiration that began and completed between these stages.

System action

System processing continues.

User response

Check the client log for error and retry messages. Reissue the archive request if the retry failed.

ANR09 Error writing to 47E **trace file file spec.**

Explanation

An error occurred while writing to the specified trace file.

System action

Trace is disabled.

User response

Check the file for proper access permissions, or for the out of space issue for the trace file. Once this is corrected, reissue the TRACE BEGIN command, specifying either the same or a different output file.

ANR09 Expiration 48I **processing of retention bitfiles was started for node nodename, file space filespace name, and copy group copygroup.**

Explanation

Expiration processing of retention bitfiles in retention pools was started for the indicated node, file space, and copy group.

System action

Inventory file expiration continues.

User response

This message is for informational purposes only and is only displayed if the expiration

processing is executed with QUIET=NO.

ANR09 49I Expiration of retention bitfiles is completed for node *nodename*, file space *filespace name*, and copy group *copygroup* with retention bitfile retention bitfiles deleted.

Explanation

The expiration process was evaluated. The statistics show the number of retention bitfiles that were deleted from retention pools.

System action

Inventory file expiration continues.

User response

No action is required. This message is informational and displayed only if the expiration processing is executed with the QUIET=NO parameter setting.

ANR09 50I Session *Session number* for node *Node name* is using inline server data deduplication or inline compression.

Explanation

Inline data deduplication or inline compression was used for the specified node and session.

System action

Data was deduplicated by the server as it was written to the container storage pool.

User response

None.

ANR09 51I Session *Session number* for node *Node name* processed files processed files by using inline data deduplication or compression, or both. The number of original bytes was *bytes processed*. Inline data deduplication reduced the data by *bytes reduced by dedup* bytes and inline compression reduced the data by *bytes reduced by compression* bytes.

Explanation

Data deduplication or compression processing, or both, is complete for the specified node.

System action

Statistics are displayed for the specified node.

User response

None.

ANR09 52W The *filespace Filespace name* cannot be included in the

backup set because it contains encrypted data.

Explanation

Data from the filespace cannot be included in the backup set because the filespace contains encrypted data.

System action

The filespace is skipped.

User response

None.

ANR09 53I Snapshot created for node *Node name*, filespace *Filespace name* at *Creation Date Creation Time*. The snapshot processed files processed files. The original full size was *original size*. The number of bytes written was *bytes processed*. Inline data deduplication reduced the data by *bytes reduced by dedup* bytes and inline compression reduced the data by *bytes reduced by compression* bytes.

Explanation

Data deduplication or compression processing, or both, is complete for the specified snapshot.

System action

Statistics are displayed for the specified snapshot.

User response

None.

ANR09 54I Snapshot created for node *Node name* that processed files processed files. The total number of original bytes processed was *bytes processed*.

Explanation

Statistics are displayed for the specified snapshot.

System action

Statistics are displayed for the specified snapshot.

User response

None.

ANR09 55I DELETE *FILESPLACE filespace name* for node *node name* failed deletion because of a restartable restore session.

Explanation

The reported node and filespace have a restartable restore session active or restartable. A filespace cannot be deleted while the restartable restore session exists.

System action

The server process is retried if the maximum number of retry attempts have not been exceeded.

User response

Use the QUERY RESTORE command to view active and restartable restores sessions for this file space. Either wait for the sessions to complete or cancel the sessions with the CANCEL RESTORE command, and reissue the DELETE FILESPACE command. To view restartable restore sessions issue the command QUERY RESTORE. Either:

- wait to reissue the DELETE FILESPACE command after this restartable restore has completed
- cancel the restartable restore session with the CANCEL RESTORE command

ANR09 CLEANUP 58I **BACKUPGROUP S** evaluated *objectcount* group objects, found *errorcount* errors, and deleted *deleted* group objects with completion state *state*.

Explanation

The CLEANUP BACKUPGROUPS utility ended with the presented state.

System action

Server operation continues.

User response

None.

ANR09 Process process 60I *ID* waiting for mount point in device class *device class name*.

Explanation

The process whose ID is shown has begun to wait for a mount point that can be used for a volume in the device class shown.

System action

The process waits for the mount point.

User response

Respond to any mount requests.

ANR09 Process process 61I *ID* waiting for multiple mount points in device class *device class name*.

Explanation

The process whose ID is shown has begun to wait for multiple mount points that can be used for a volume in the device class shown.

System action

The process waits for the mount points.

User response

Respond to any mount requests.

ANR09 Process process 62I *ID* waiting for mount points in device classes

device class name and *device class name*.

Explanation

The process whose ID is shown has begun to wait for mount points that can be used for a volume in the two device classes shown.

System action

The process waits for the mount points.

User response

Respond to any mount requests.

ANR09 Process process 63I *ID* waiting for mount of input volume *volume name*.

Explanation

The process whose ID is shown has begun to wait for the mount of the input volume shown.

System action

The process waits for the mount.

User response

Respond to any mount requests.

ANR09 Process process 64I *ID* waiting for mount of output volume *volume name*.

Explanation

The process whose ID is shown has begun to wait for the mount of the output volume shown.

System action

The process waits for the mount.

User response

Respond to any mount requests.

ANR09 Process process 65I *ID* waiting for mount of scratch volume.

Explanation

The process whose ID is shown has begun to wait for the mount of a scratch volume.

System action

The process waits for the mount.

User response

Respond to any mount requests.

ANR09 Process process 66I *ID* waiting for access to input volume *volume name*.

Explanation

The process whose ID is shown has begun to wait for availability of the input volume shown.

System action

The process waits for the volume to become available.

User response

None.

ANR09 Process process 67I *ID* waiting for access to output

**volume volume
name.**

Explanation

The process whose ID is shown has begun to wait for availability of the output volume shown.

System action

The process waits for the volume to become available.

User response

None.

ANR09 81E The server database must be restored before the server can be started.

Explanation

This message is issued in one of two cases: 1) The server has been restarted after an incomplete RESTORE DB. In order to start the server, you must restore the database to a consistent state using the DSMSEV RESTORE DB command; 2) During server operation, an error condition occurred such that the IBM Storage Protect server cannot continue. This message is issued, and the server halts. Before you can start the server again, you need to use the DSMSEV RESTORE DB command to restore the database.

System action

Server initialization stops, or the server stops.

User response

If there are other messages issued with this error message which have instructions associated with them, follow the instructions in those messages. Then issue the DSMSEV RESTORE DB command. After the DSMSEV RESTORE DB command completes successfully, restart the IBM Storage Protect server.

ANR09 82I Session Session number for node Node name is using server-side encryption.

Explanation

Server-side encryption was used for the specified node and session.

System action

Data was encrypted by the server as it was written to the container storage pool.

User response

None.

ANR09 83W The server database was recorded by a down-level version of the server program. The UPGRADEDDB parameter is required to start the server and automatically upgrade the database contents to the current server version. Please refer to installation

instructions for precautionary backup procedures prior to doing this.

Explanation

At server startup, the server has discovered that the database information was written by an earlier version of the server program and is not compatible with this version. To automatically upgrade the server database to this version of the server program, the UPGRADEDDB parameter must be specified when starting the server.

System action

The server ends.

User response

Refer to installation instructions for specific information on precautionary measures that you may want to take to back up the database prior to upgrading it to the current server level. After you have taken these measures, start the server and specify the UPGRADEDDB parameter. This parameter only needs to be specified once to start the server, and should NOT be included in any automated programs that start the server.

ANR09 84I Process process ID for process name started in the process state at process start time.

Explanation

The process whose ID is shown has been started for the process indicated by the process name running in the indicated state.

System action

None.

User response

None.

ANR09 85I Process process ID for process name running in the process state completed with completion state completion state at process start time.

Explanation

A completion state of SUCCESS indicates that the operation ran successfully. A completion state of FAILURE indicates that the operation encountered an error condition or ended before completion. A completion state of COMPLETED indicates that the operation ran to completion; however, conditions might have occurred that can affect the outcome of the operation.

System action

If the completion state is SUCCESS or COMPLETED, no action is required. If the completion state is FAILURE, investigate the cause.

User response

If the completion state is FAILURE, review the activity and event logs to determine the cause of the failure and correct the issue. If the completion state is COMPLETED, you can optionally review the activity and event logs to find possible warning or error messages about conditions that might have affected the operation.

ANR09 86I *Process process ID for process name running in the process state processed items processed items for a total of bytes processed bytes with a completion state of completion state at process start time.*

Explanation

A completion state of FAILURE indicates that the operation encountered an error condition or terminated before completion. A completion state of SUCCESS indicates that the operation ran to completion, but in some situations may have encountered and reported conditions that would affect the outcome of the operation. The total bytes that is reported is the number of bytes of source data that was processed in the transaction. It does not include any meta data that might be in the output.

System action

None.

User response

If the completion state is FAILURE, then review the activity log and the event log to try to determine the cause of the failure. If the completion state is SUCCESS, the activity log and the event log can still be checked for warning messages regarding conditions that could have affected the operation.

ANR09 87I *Process process ID for process name running in the process state processed items processed items with a completion state of completion state at process start time.*

Explanation

A completion state of FAILURE indicates that the operation encountered an error condition or terminated before completion. A completion state of SUCCESS indicates that the operation ran to completion, but in some situations may have encountered and reported conditions that would affect the outcome of the operation.

System action

None.

User response

If the completion state is FAILURE, then review the activity log and the event log to try to determine the cause of the failure. If the completion state is SUCCESS, the activity log and the event log can still be checked for warning messages regarding conditions that could have affected the operation.

ANR09 88I *Process process ID for process name running in the process state processed bytes processed bytes with a completion state of completion state at process start time.*

Explanation

A completion state of FAILURE indicates that the operation encountered an error condition or terminated before completion. A completion state of SUCCESS indicates that the operation ran to completion, but in some situations may have encountered and reported conditions that would affect the outcome of the operation.

System action

None.

User response

If the completion state is FAILURE, then review the activity log and the event log to try to determine the cause of the failure.

If the completion state is SUCCESS, the activity log and the event log can still be checked for warning messages regarding conditions that could have affected the operation.

ANR09 89E *The server database must be inserted or restored before the server can be started.*

Explanation

The server is restarted after the LOADFORMAT command is run. To start the server, you must upgrade the database by issuing DSMSEV INSERTDB or else the database needs to be restored using the DSMSEV RESTORE DB command.

System action

Server initialization stops.

User response

Issue the DSMSEV INSERTDB or DSMSEV RESTORE DB command. Alternatively, the server can be installed using the DSMSEV FORMAT command in order to prepare it for regular use without needing to upgrade an earlier version server with the DSMSEV INSERTDB command or restoring the database with the DSMSEV RESTORE DB command.

ANR09 90I *Server restart-recovery in progress.*

Explanation

The server has been restarted after a halt or system failure. If necessary, the server performs recovery processing in order to bring the system back to a consistent state.

System action

Server initialization continues.

User response

None.

ANR09 server shutdown 91I complete.

Explanation

In response to a HALT command, the server or storage agent has completed its termination processing.

System action

The server or storage agent ends.

User response

None.

ANR09 Server's 92I database formatting complete.

Explanation

The server formatting procedure has completed successfully. The server is now available for normal operation.

System action

Server completes formatting processing.

User response

None.

ANR09 Server 93I initialization complete.

Explanation

The server has been restarted after a halt or system failure. It is now ready to resume normal operation.

System action

Server completes initialization.

User response

None.

ANR09 This version of 95W the server program is down-level with respect to the information recorded on disk; a newer version of the program should be used.

Explanation

At server startup, the server has discovered that the disk information was written by a later version of the server program. This version of the server program should not be used.

System action

The server ends.

User response

Start a version of the server program that is at the same level as the prior server program used.

ANR09 The information 96W on disk was recorded by a down-level version of the server program; reinstallation is required to use this version.

Explanation

At server startup, the server has discovered that the disk information was written by an earlier version of the server program and is not compatible with this version.

System action

The server ends.

User response

Install this version of the server to bring the information up to the level of the program being used.

ANR10 Migration 00I process process ID started for storage pool

ANR Messages 01001-02000

ANR10 Migration 01I process process ID ended for storage pool storage pool name.

Explanation

A migration process for the named storage pool ends. This action can occur because the low migration threshold for the storage pool has been reached, there are no more nodes with files to be migrated, there

storage pool name automatically or manually, highMig=highMig value, lowMig=lowMig value, duration=duration.

Explanation

Because the high migration threshold for the storage pool shown has been exceeded, a process has been started to migrate files from the storage pool. Note: a duration value of No means that the duration is not specified and hence the migration runs without duration.

System action

Data is moved from this storage pool to the next (target) pool.

User response

None.

are no more volumes to be migrated, or the duration specified has been reached.

System action

None.

User response

None.

ANR10 Migration for 02I storage pool storage pool name will be retried in number of

**seconds
seconds.**

Explanation

Because of a problem encountered attempting migration for the named storage pool, migration is delayed but will be retried after the time period shown.

System action

The server waits for the specified period and then retries migration for the storage pool. This delay applies to a single migration process. After a number of unsuccessful retries, the server will automatically cancel the process. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

If possible, correct the condition that has caused delayed migration.

**ANR10 Migration retry
03I delay ended;
checking
migration status
for storage pool
storage pool
name.**

Explanation

Because migration for the indicated storage pool had been delayed due to a problem, the system waited before retrying. The retry wait period has ended, and the system will now retry migration.

System action

Migration processing for the storage pool resumes.

User response

None.

**ANR10 Server
04I formatting
complete,
database ready
for loading.**

Explanation

The server formatting procedure has completed successfully. The server is ready to be loaded by issuing the DSMSEV LOADDB or the DSMSEV RESTORE DB command.

System action

Server completes formatting processing.

User response

The DSMSEV LOADDB or the DSMSEV RESTORE DB command is required to load the database before the server will be ready for use.

**ANR10 Storage rule
06E storage rule
name did not
start a
replicating
process because
a DELETE
FILESPACE
operation is in
progress.**

Explanation

Data cannot be replicated to a new location while a DELETE FILESPACE operation is in progress for the associated file space.

System action

Server operations continue, but no data is replicated.

User response

Change the start time of the replicating operation to avoid overlap with any DELETE FILESPACE operations.

**ANR10 Command: The
08E command was
not processed
because virtual
machine names
and file space
names cannot
be specified
when more than
one node name
is specified.**

Explanation

If you specify more than one node name when you define or update a retention rule, you cannot specify virtual machines or file spaces. If you specify more than one node name when you delete nodes from a retention set, you cannot specify virtual machines or file spaces.

System action

System operation continues, but the command is not processed.

User response

Determine the fully qualified name of the node that owns the virtual machine or file space. Reissue the command with the fully qualified node name.

**ANR10 Command: The
09E command was
not processed
because virtual
machine names
and file space
names cannot
be specified
when a partially
qualified node
name is
specified.**

Explanation

If you specify a partially qualified node name when you define or update a retention rule, you cannot specify virtual machines or file spaces. If you specify a partially qualified node name when you delete nodes from a retention set, you cannot specify virtual machines or file spaces.

System action

System operation continues, but the command is not processed.

User response

Determine the fully qualified name of the node that owns the virtual machine or file space. Reissue the command with the fully qualified node name.

**ANR10 Command: The
10E command was
not processed
because virtual
machine names
and file space
names cannot
be specified
when a node
group name is
specified.**

Explanation

If you specify a node group name when you define or update a retention rule, you cannot specify virtual machines or file spaces. If you specify a node group name when you delete nodes from a retention set, you cannot specify virtual machines or file spaces.

System action

System operation continues, but the command is not processed.

User response

Determine the fully qualified name of the node that owns the virtual machine or file space. Reissue the command with the fully qualified node name.

ANR10 Command: One 12I or more file spaces that belong to one of the specified nodes cannot be members of a retention set.

Explanation

One or more file spaces that belong to one of the specified nodes are not permitted to be in a retention set. Only filespace created by the IBM Storage Protect backup-archive client or by IBM Storage Protect for Virtual Environments are permitted.

System action

System operation continues.

User response

Reissue the command specifying the nodes and file spaces that are owned by a supported client.

ANR10 During a store 13I operation, the server is switching to a next pool in the storage hierarchy. The next storage pool will inherit the simultaneous write configuration from the destination primary storage pool.

Explanation

If during a backup, archive, client migration, or server import operation, the server must write data to a next pool in a storage pool hierarchy, the following rules will apply:

1. If the destination storage pool specified in the management class copy group has one or more copy storage pools associated with it for simultaneous write operations:
 - a. The server will write the data to the next storage pool and to the copy pools that are associated with the original destination

primary storage pool.

- b. The setting of the COPYCONTINUE attribute of the original destination primary pool will be inherited by the next pool.
 - c. If the next pool is configured for simultaneous write operations, the copy storage pools associated with the next pool will be ignored as well as the value of its COPYCONTINUE attribute.
2. If the primary storage pool specified in the management class copy group does not have copy pools associated with it for simultaneous write operations:
 - a. The server will write the data to the next storage pool.
 - b. If the next pool is configured for simultaneous write operations, the copy pools associated with the next pool will be ignored.

System action

The server operation continues.

User response

None. Refer to IBM Knowledge Center for details about simultaneous write configurations.

ANR10 The pool type 14W storage pool

pool name is either not available, or does not have enough space for a simultaneous write operation.

Explanation

During a backup, archive, client migration, or import operation that is using simultaneous write, the server cannot write data to the specified storage pool. Possible reasons include:

- The storage pool is unavailable.
- There is not enough space available in the specified storage pool.

System action

The result of the simultaneous write operation depends on the setting of the COPYCONTINUE attribute of the original destination primary pool destination:

- If the value of the COPYCONTINUE attribute of the destination primary pool is YES, the server will stop writing to the failing copy pool for the remainder of the session, but continue storing files into a primary pool in the storage hierarchy and any other remaining copy pools.
- If the value of the COPYCONTINUE attribute of the destination primary pool is NO, the server will fail the transaction and discontinue the operation.

User response

Ensure the copy storage pool is set for READWRITE access. If needed, make more space available in the copy storage pool. After the problem is corrected, take one of the following actions:

- If the value of the COPYCONTINUE attribute of the destination primary pool is YES, issue the BACKUP STGPPOOL commands to back up any files in primary storage pools in the storage pool hierarchy that have not been copied to the copy pool that failed.
- If the value of the COPYCONTINUE attribute of the destination primary pool is NO, run the simultaneous write operation again.

ANR10 Storage pool 15I *pool name has pending bytes duplicate bytes pending removal.*

Explanation

The number of bytes indicated have been identified as duplicate bytes in the storage pool, but the volumes on which the data resides have not yet been reclaimed.

System action

None

User response

None

ANR10 Fibre Channel 16W *adapters on the system cannot be opened.*

Explanation

Due to problems with the HBAAPI or Fibre Channel HBA driver, the HBAAPI function cannot open any Fibre Channel host bus adapters (HBAs) on the system.

System action

None.

User response

The IBM Storage Protect SAN discovery function is not working. Check your Fibre Channel host bus adapter (HBA) vendor and upgrade your HBAAPI or Fibre Channel HBA driver version. For a list of supported HBAs and required driver levels by operating system, see techdoc 1193154 at <http://www.ibm.com/support/docview.wss?uid=swg21193154>.

ANR10 Command: File 17E *space filespace name that belongs to node node name is not permitted to be a member of a retention set.*

Explanation

A filespace that belongs to one of the specified nodes is not permitted to be in a retention set. Only file spaces created by the IBM Storage Protect backup-archive client or by IBM Storage Protect for Virtual Environments are permitted.

System action

System operation continues.

User response

Reissue the command specifying the nodes and file spaces that are owned by a supported client.

ANR10 Volume 18I *deduplication process process ID started for storage pool storage pool name, identify processes=num ber of identify processes.*

Explanation

A volume deduplication process was started for the storage pool shown.

System action

None.

User response

None.

ANR10 Unable to get 19W *the node attributes for node name.*

Explanation

The HBAAPI function cannot obtain the node's attributes. Removing devices from the SAN without reconfiguring the system can cause this problem.

System action

None.

User response

SAN discovery is not working for this device. Check the device configuration on the system.

ANR10 Migration 20W *process process ID terminated for storage pool storage pool name - process canceled.*

Explanation

During migration for the indicated storage pool, a process performing the migration has been canceled.

System action

The migration process is terminated. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

None.

ANR10 Migration 21W *process process ID terminated for storage pool storage pool name - storage media inaccessible.*

Explanation

During migration for the indicated storage pool, a required volume could not be mounted.

System action

The indicated migration process ends. The server waits for the retry

period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

One possible cause for this failure is that the access state for the target volume or storage pool for this operation is not set to READWRITE. Check the access state for the requested output volume and storage pool and ensure they are set to ACCESS=READWRITE.

ANR10 Migration 22W *process process ID terminated for storage pool storage pool name - excessive read errors encountered.*

Explanation

During migration for the indicated storage pool, read errors occur that prevented the migration from continuing.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

If possible, correct the cause of the read errors.

ANR10 Migration 23W *process process ID terminated for storage pool storage pool name - excessive write errors encountered.*

Explanation

During migration for the indicated storage pool, write errors occur that prevent the migration from continuing.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

If possible, correct the cause of the write errors.

ANR10 Migration 24W *process process ID terminated for storage pool storage pool name - data transfer interrupted.*

Explanation

During migration for the indicated storage pool, a data transfer operation was interrupted and could not be continued.

System action

The indicated migration process ends. The server waits for the retry

period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

If possible, correct the cause of the interruption.

ANR10 Migration 25W *process process ID terminated for storage pool storage pool name - insufficient space in subordinate storage pool.*

Explanation

During migration for the indicated storage pool, the server cannot move the data from the storage pool, because there is not enough space on the next storage pool to hold it.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again.

User response

Make more space available in the next storage pool, or use the UPDATE STGPPOOL command to change the next storage pool to one with more space.

ANR10 Migration 26W *process process ID terminated for storage pool storage pool name - unable to move file to*

subordinate storage pool due to exclusion by size.

Explanation

During migration for the indicated storage pool, the server cannot move the data from the storage pool, because a file is larger than what is allowed on the next storage pool.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

Use the UPDATE STGPPOOL command to change the next storage pool maximum file size or to change the next storage pool target.

ANR10 Migration 27W *process process ID terminated for storage pool storage pool name - sufficient recovery log space is not available.*

Explanation

During migration for the indicated storage pool, the server runs out of recovery log space.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again.

User response

If necessary, make more server recovery log space available.

ANR10 Migration 28W *process process ID terminated for storage pool storage pool name - sufficient database space is not available.*

Explanation

During migration for the indicated storage pool, the server runs out of database space.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again.

User response

If necessary, make more server database space available.

ANR10 Migration 29W *process process ID terminated for storage pool storage pool name - lock conflict.*

Explanation

During migration for the indicated storage pool, the server needs to

obtain a lock that is not available.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

Wait for the server to retry the migration.

ANR10 Migration 30W *process process ID terminated for storage pool storage pool name - thread resource not available.*

Explanation

During migration for the indicated storage pool, the server cannot start a thread for the migration process.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

Wait for the server to retry the migration. If the error persists, it may indicate a shortage of server memory.

ANR10 Migration 31W *process process ID terminated for storage pool storage pool name - sufficient memory is not available.*

Explanation

During migration for the indicated storage pool, there is not enough server memory available.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again.

User response

If necessary, make more memory available to the server.

ANR10 Migration 32W *process process ID terminated for storage pool storage pool name - internal server error detected.*

Explanation

During migration for the indicated storage pool, the server encounters an internal error.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage

pool, these processes will continue migration.

User response

Contact your service representative.

ANR10 Migration 33W *process process ID terminated for storage pool storage pool name - transaction aborted.*

Explanation

During migration for the indicated storage pool, the server detected an error while attempting to commit a transaction. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The indicated migration process ends. The server waits for the retry period to expire and then tries the migration again. If other migration processes are executing for the named storage pool, these processes will continue migration.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR10 Files stored on 34W *volume volume name cannot be migrated - volume is offline or access mode is "unavailable" or "destroyed".*

Explanation

During migration, files on the indicated volume cannot be migrated either because the volume has been varied offline or because of the volume's access mode.

System action

The server continues migration processing, but skips files stored on the indicated volume.

User response

If necessary, use the VARY ON or UPDATE VOLUME command for this volume.

ANR10 Command:
35I *Client name is not a member of retention rule Retention rule name.*

Explanation

The specified node or filespace is not a member of the retention rule.

System action

System operation continues.

User response

No action is required.

ANR10 Command: The
36I *client name Client name is already a member of retention rule Retention rule name.*

Explanation

You cannot have duplicate members in the

same retention rule. If a client is already a member of a retention rule, you cannot add a client with the same client name to the retention rule again.

System action

System operation continues. The client is not added to the rule again.

User response

No action is required.

ANR10 Command:
37I *Retention rule Retention rule name does not have any members.*

Explanation

The retention rule from which a retention set is being created does not contain any members, or the specified members do not match any existing nodes or file spaces.

System action

The retention set is not created.

User response

To add members to the retention rule, issue the UPDATE RETRULE command.

ANR10 command: No
38W *eligible file spaces for node node name that contain backup data are present.*

Explanation

The specified node has no applicable file spaces to be processed by the command. To be eligible for inclusion in a retention set, a file space must contain data backed up by the IBM Storage Protect backup-archive client or by IBM Storage Protect for Virtual Environments.

System action

System operation continues.

User response

Check the command settings for the file spaces that belong to the node and reissue the command.

ANR10 A mount request
39W *failed for volume volume name.*

Explanation

The specified volume was not mounted because no suitable drive was available. In a tape library with mixed generation drives and mixed generation cartridges, a cartridge can be mounted only to a drive that is the same generation or later. For more information about the use of mixed generation drives and cartridges, see the Tape Solution Guide.

System action

System operation continues, but the volume is not mounted.

User response

To resolve the issue, complete the following steps: 1. To determine the recording format of the drive that must be mounted, run the QUERY DEVCLASS command: query devclass In the output, locate the library that is associated with the drive and the format setting for that library. Determine whether the format is DRIVE or a specific device recording type, such as ULTRIUM8C. 2. To obtain additional information about the drive, run the QUERY DRIVE command: query drive In the output, find the drive type (for example, LTO 8) and drive state (for example, full, empty, or unavailable). Based on the drive type, you can determine whether mixed generation tape drives are included in the library. 3. To obtain information about the tape volumes in the library, run the QUERY LIBVOLUME command: query libvolume <library_name> In the output, locate the volume name and the media type. Based on the media type, determine whether mixed generation tape cartridges are used in the library. 4. Based on information from the previous steps, determine the value to specify for the FORMAT parameter of the drive. For more information, see the Tape Solution Guide. 5. Update the FORMAT parameter of the drive by running the UPDATE DEVCLASS command: update devclass <device_class> format=<format>

**ANR10 Space
40I reclamation
started for
volume *volume
name*, storage
pool *storage
pool name*
(process
number *process
ID*).**

Explanation

The percentage of reclaimable space on the volume shown has reached the reclaim percentage specified for the storage group; as a result, data from the volume is moved to another volume so that the volume can be reclaimed.

System action

The server starts volume space reclamation.

User response

None.

**ANR10 Space
41I reclamation
ended for
volume *volume
name*.**

Explanation

Space reclamation for the volume named is complete.

System action

None.

User response

None.

**ANR10 Space
42I reclamation for
storage pool
*storage pool
name* will be**

**retried in
*number of
seconds*
seconds.**

Explanation

Because of a problem encountered attempting space reclamation for the named storage pool, reclamation stops but will be retried after the time period shown. After a number of unsuccessful retries, the process will be automatically cancelled.

System action

The system waits for the specified period and then retries space reclamation for the storage pool.

User response

If possible, correct the condition that has stopped reclamation.

**ANR10 Space
43I reclamation
retry delay
ended; checking
volume
reclamation
status for
storage pool
*storage pool
name*.**

Explanation

Because space reclamation for the indicated storage pool had been stopped due to a problem, the system waited before retrying. The retry wait period has ended, and the system can now retry space reclamation.

System action

Reclamation for the pool begins.

User response

None.

**ANR10 Removable
44I volume *volume
name* is
required for
space
reclamation.**

Explanation

During space reclamation processing, the server determines that a removable volume is required in order to complete processing.

System action

The server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

**ANR10 Reclamation
45E has ended for
volume *volume
name*. The files
on the volume
are too large for
the target
storage pool,
*storage pool
name*.**

Explanation

During reclamation for the indicated volume, the server cannot move the data from the volume because a file is larger than allowed for the indicated storage pool.

System action

Reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

Use the UPDATE STGPPOOL command to change the value of the MAXSIZE parameter for the storage pool. Specify the value as NOLIMIT, or specify a value larger than the largest file to be reclaimed.

**ANR10 command:
46E Database
upgrade not
currently
supported for
this server
because it uses
backup sets.**

Explanation

The current version of the IBM Storage Protect 6.1 server does not support backup sets. However, the server being upgraded uses backup sets, and so cannot be upgraded at this time. Note that this is a temporary limitation that will be lifted in a future IBM Storage Protect 6.1 Server Fix Pack.

System action

The command ends without inserting any data into the database.

User response

Rerun the command using a version of the IBM Storage Protect 6.1

server that supports backup sets.

ANR10 command:
47E Database upgrade not currently supported for this server because it uses NAS backups with TOCs.

Explanation

The current version of the IBM Storage Protect 6.1 server does not support NAS backups that use a table of contents (TOC). However, the server being upgraded uses TOCs, and so cannot be upgraded at this time. Note that this is a temporary limitation that will be lifted in a future IBM Storage Protect 6.1 Server Fix Pack.

System action

The command ends without inserting any data into the database.

User response

Rerun the command using a version of the IBM Storage Protect 6.1 server that supports NAS backups with TOCs.

ANR10 command:
48E Protocol error - out-of-sequence verb (type verb name) received.

Explanation

The server detects a protocol error while upgrading the database because a verb has been received that does not adhere to the defined verb sequence. This error

may be the result of using a version of the DSMUPGRD utility that is not compatible with the IBM Storage Protect 6.1 version to which you are upgrading.

System action

The command ends without inserting any data into the database.

User response

Rerun the command using a version of the server compatible with the version of DSMUPGRD used to extract the data. Or reextract the data using an older version of DSMUPGRD that is compatible with the version of the server.

ANR10 The server is
49W unable to obtain number-formatting information from the system-locale attributes. The server substitutes alternate number format nmbrFmt.

Explanation

The server is unable to format some numbers because it is unable to obtain a valid thousand and decimal separator value from the system locale.

System action

The server continues. An alternate number format is used. Numbers are displayed using a comma character as the thousand

separator and a period character as the decimal separator.

User response

Check whether errors occurred during server initialization that might indicate a problem initializing the locale. Check whether the server is running in a locale supported by the server. If it is not, restart the server in a supported locale.

ANR10 File space
50E filespace name in node node name was not deleted because a tiering process is in progress.

Explanation

The specified file space is being moved to a different storage location as part of a tiering process. A file space cannot be deleted while tiering is in progress.

System action

System operation continues, but the DELETE FILESPACE command fails.

User response

To resolve the issue, complete the following steps: 1. View active tiering processes by issuing the QUERY PROCESS command. 2. For any tiering process that affects the specified file space, either wait until the process is complete or cancel the process by issuing the CANCEL PROCESS

command. For example, if the process number is 54, issue the following command: cancel process 54 3. Reissue the DELETE FILESPACE command.

ANR10 Command:
53E Invalid process number - processIdvalue

Explanation

A QUERY EXPORT command was issued that specifies an invalid process number.

System action

The server does not process the command.

User response

Reissue the command with a valid process number.

ANR10 Command:
54E Invalid export operation state - export state

Explanation

A QUERY EXPORT command was issued that specifies an invalid export state.

System action

The server does not process the command.

User response

Reissue the command with a valid export operation state.

ANR10 Command:
55E Invalid export session identifier name - export sess name.

Explanation

The issued command specifies an invalid export session identifier.

System action

The server does not process the command.

User response

Reissue the command with a valid export session identifier.

ANR10 command name: 56E The **PROCESS** parameter is not valid if an export identifier is specified.

Explanation

The command failed because of an invalid combination of arguments.

System action

The command fails and server operations continue.

User response

Reissue the command with a valid set of parameters.

ANR10 command name: 57E The **PROCESS** parameter is not valid when the **STATE** parameter is specified with a value of **INITIALIZING** or **SUSPENDED**

Explanation

The command failed because of an

invalid combination of arguments.

System action

The command fails and server operations continue.

User response

Reissue the command with a valid set of parameters.

ANR10 command name: 58E **TODATE** must be specified when **TOTIME** is specified.

Explanation

A command supporting the **TODATE** and **TOTIME** parameters was issued with the **TOTIME** parameter specified but without the **TODATE** parameter. When the **TOTIME** parameter is used, the **TODATE** parameter must be specified.

System action

The server ignores the command and continues processing.

User response

Reissue the command and specify both the **TODATE** and **TOTIME** parameters.

ANR10 Selective 59I restore of NAS node *nodename*, file system *file system*, started as process *process ID* by administrator *administrator*. Specified files and/or directory

trees will be restored to destination *destination*.

Explanation

A restore is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown. Selected files and/or directory trees specified by the administrator will be restored to the indicated destination.

System action

The indicated process is started.

User response

None.

ANR10 Error initiating 60W space reclamation for storage pool *storage pool name* - lock conflict.

Explanation

While attempting to initiate space reclamation for the indicated storage pool, the server needs to obtain a lock that is not available.

System action

Space reclamation stops. The server waits for the retry period to expire and then tries the reclamation again.

User response

Wait for the server to retry the reclamation.

ANR10 Error initiating 61W space

reclamation for storage pool *storage pool name* - sufficient memory is not available.

Explanation

During an attempt to initiate space reclamation for the indicated storage pool, there is not enough server memory available.

System action

Space reclamation stops. The server waits for the retry period to expire and then tries the reclamation again.

User response

If necessary, make more memory available to the server.

ANR10 Error initiating 62W space reclamation for storage pool *storage pool name* - internal server error detected.

Explanation

During an attempt to initiate space reclamation for the indicated storage pool, an internal server error is encountered.

System action

Space reclamation stops. The server will wait for the retry period to expire and then tries the reclamation again.

User response

Contact your service representative.

**ANR10 Full backup of
63I NAS node
nodename, file
system file
system, started
as process
process ID by
administrator
administrator.**

Explanation

A full backup is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown.

System action

The indicated process is started.

User response

None.

**ANR10 Differential
64I backup of NAS
node nodename,
file system file
system, started
as process
process ID by
administrator
administrator.**

Explanation

A differential backup is started for the indicated file system of a NAS node. Only files that have changed since the last full backup will be processed. The operation is initiated by the administrator shown.

System action

The indicated process is started.

User response

None.

**ANR10 Restore of NAS
65I node nodename,
file system file
system, started
as process
process ID by
administrator
administrator. A
full image for
this file system
will be restored
to destination
destination.**

Explanation

A restore is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown. The restore will be performed using a full image of this file system. The file system will be restored to the indicated destination.

System action

The indicated process is started.

User response

None.

**ANR10 Restore of NAS
66I node nodename,
file system file
system, started
as process
process ID by
administrator
administrator. A
full image plus a
differential
image for this
file system will
be restored to
destination
destination.**

Explanation

A restore is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown. The restore will be performed using a full image plus a differential image of this file system. The file system will be restored to the indicated destination.

System action

The indicated process is started.

User response

None.

**ANR10 Operation
67I process process
ID completed.**

Explanation

The indicated operation completed.

System action

The indicated process ends.

User response

None.

**ANR10 Operation
68W process process
ID terminated -
process
cancelled.**

Explanation

During the indicated operation, a background process was cancelled.

System action

The indicated process ends.

User response

None.

**ANR10 Operation
69E process process
ID terminated -
insufficient
number of
mount points
available for
removable
media.**

Explanation

During the indicated operation, the server could not allocate sufficient mount points for the volumes required.

System action

The indicated process ends.

User response

If necessary, make more mount points available.

**ANR10 Storage rule
70E storage rule
name did not
start a copying
process because
a DELETE
FILESPACE
operation is in
progress.**

Explanation

Data cannot be copied to a new location while a DELETE FILESPACE operation is in progress for the associated file space.

System action

Server operations continue, but no data is copied.

User response

Change the start time of the copying operation to avoid overlap with any DELETE FILESPACE operations.

ANR10 Operation
71E process process ID terminated - read errors encountered.

Explanation

During the indicated operation, read errors prevent the operation from continuing.

System action

The indicated process ends.

User response

If possible, correct the cause of the errors and restart the operation.

ANR10 Operation
72E process process ID terminated - insufficient space in destination storage pool.

Explanation

During the indicated operation, there is not enough space available in the destination storage pool.

System action

The indicated process ends.

User response

Make more space available in the storage pool and restart the operation.

ANR10 Operation
73E process process ID terminated - sufficient recovery log space is not available.

Explanation

During the indicated operation, the server runs out of recovery log space.

System action

The indicated process ends.

User response

If necessary, make more server recovery log space available.

ANR10 Operation
74E process process ID terminated - sufficient database space is not available.

Explanation

During the indicated operation, the server runs out of database space.

System action

The indicated process ends.

User response

If necessary, make more server database space available.

ANR10 Operation
75E process process ID terminated - lock conflict.

Explanation

During the indicated operation, the server

needs to obtain a lock that is not available.

System action

The indicated process ends.

User response

Restart the operation.

ANR10 Operation
76E process process ID terminated - sufficient memory is not available.

Explanation

During the indicated operation, not enough server memory is available.

System action

The indicated process ends.

User response

If necessary, make more memory available to the server, and then restart the operation.

ANR10 Operation
77E process process ID terminated - transaction aborted.

Explanation

During the indicated operation, the server detected an error while attempting to commit a transaction. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The indicated process ends.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR10 Operation
78E process process ID terminated - internal server error detected.

Explanation

During the indicated operation, the server encounters an internal error.

System action

The indicated process ends.

User response

Contact your service representative.

ANR10 Storage rule
79E storage rule name did not start a tiering process because a DELETE FILESPACE operation is in progress.

Explanation

Data cannot be tiered to a new location while a DELETE FILESPACE operation is in progress for the associated file space.

System action

Server operations continue, but no data is tiered.

User response

Change the start time of the tiering operation to avoid overlap with any DELETE FILESPACE operations.

ANR10 Space 80W reclamation is ended for volume *volume name*. The process is canceled.

Explanation

During space reclamation for the indicated volume, the process performing the reclamation has been canceled.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

None.

ANR10 Space 81E reclamation is ended for volume *volume name*. Storage media is inaccessible.

Explanation

During space reclamation for the indicated volume, a required volume cannot be mounted.

System action

Space reclamation of the volume stops. If other reclamation processes are executing, these

processes will continue the reclamation.

User response

None.

ANR10 Space 82E reclamation is ended for volume *volume name*. There is an insufficient number of mount points available for removable media.

Explanation

During space reclamation for the indicated volume, the server could not allocate sufficient mount points for the volumes required.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

If necessary, make more mount points available.

ANR10 Space 83E reclamation is ended for volume *volume name*. Excessive read errors were encountered.

Explanation

During space reclamation for the indicated volume, read errors occur that prevent reclamation from continuing.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

If possible, determine and correct the cause of the read errors.

ANR10 Space 84E reclamation is ended for volume *volume name*. Excessive write errors were encountered.

Explanation

During space reclamation for the indicated volume, write errors occur that prevent reclamation from continuing.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

If possible, determine and correct the cause of the write errors.

ANR10 Space 85E reclamation is ended for volume *volume name*. Data transfer was interrupted.

Explanation

During space reclamation for the indicated volume,

a data transfer operation has been interrupted and cannot be continued.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

If possible, determine and correct the cause of the interruption.

ANR10 Space 86E reclamation is complete for volume *volume name*. The storage pool has insufficient space.

Explanation

During space reclamation for the indicated volume, data could not be moved from the volume due to insufficient space on other volumes in the storage pool.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes continue the reclamation.

User response

Make more space available on other volumes in the storage pool. If necessary, define the next storage pool.

ANR10 Space 87E reclamation is ended for volume *volume*

name. Sufficient recovery log space is not available.

Explanation

During space reclamation for the indicated volume, the server runs out of recovery log space.

System action

Space reclamation stops.

User response

If necessary, make more server recovery log space available.

ANR10 Space 88E reclamation is ended for volume *volume name*. Sufficient database space is not available.

Explanation

During space reclamation for the indicated volume, the server runs out of database space.

System action

Space reclamation stops.

User response

If necessary, make more server database space available.

ANR10 Space 89E reclamation is ended for volume *volume name*. There is a lock conflict.

Explanation

During space reclamation for the indicated volume, the server needed to

obtain a lock that is not available.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

Wait for the server to try the reclamation again.

ANR10 Space 90E reclamation is ended for volume *volume name*. Thread resource is not available.

Explanation

During space reclamation for the indicated volume, the server cannot start a thread for the reclamation process.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

Wait for the server to try the reclamation again. If the error persists, it might indicate a shortage of server memory.

ANR10 Space 91E reclamation is ended for volume *volume name*. Sufficient memory is not available.

Explanation

During space reclamation for the indicated volume, there was not enough server memory available.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

If necessary, make more memory available to the server.

ANR10 Space 92E reclamation is ended for volume *volume name*. An internal server error was detected.

Explanation

During space reclamation for the indicated volume, the server encounters an internal error.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and to look for messages that indicate

the source of the error. Correct any errors that might have caused the space reclamation to fail and try the operation again.

ANR10 Space 93E reclamation is ended for volume *volume name*. The transaction is ended.

Explanation

During space reclamation for the indicated volume, the server detected an error while attempting to commit a transaction.

System action

Space reclamation of the volume stops. If other reclamation processes are running, these processes will continue the reclamation.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR10 Invalid 94E destination storage pool *storage pool name* specified for storage of an object using data mover *data mover*.

Explanation

While attempting to store an object using the indicated data mover, the server determined that the indicated storage pool was invalid for this operation. The indicated storage pool

is used because it is specified as the copy group destination of the assigned management class.

This storage pool could be invalid for any of the following reasons:

- The storage pool is not defined
- The storage pool is a random-access storage pool and this operation requires a sequential-access storage pool
- The storage pool is not a primary storage pool
- The storage pool has a NATIVE or NONBLOCK data format, which is not supported for this operation
- The storage pool is not a NONBLOCK data format, which is required for server-free operations
- The data format of the storage pool does not match the data format of the data mover

System action

The operation fails.

User response

This message usually indicates a configuration problem with either the storage pool or the policy. Ensure that the destination storage pool has appropriate attributes, including data format, for this operation. Check the copy group of the assigned management class. If the destination is incorrect, either assign a new management class, or change the destination in the copy group and

activate the changed policy. Also, consider whether you must define a new storage pool or data mover.

ANR10 Data mover 95E operation for node *node name* and file space *filespace name* cannot be started - an operation involving this node and file space is already in progress.

Explanation

A request has been made to use a data mover to perform an operation involving the indicated node and file space. The indicated file space was either specified as the source for a backup operation or the destination location for a restore operation. However, a data mover operation involving that node and file space is already in progress; the indicated file space is either the source for a currently running backup operation or is the destination for a currently running restore operation. To avoid possible conflicts, the new operation is not performed.

System action

The operation fails.

User response

Allow the current operation to complete before starting a new operation for this node and file space.

ANR10 Operation 96E process *process ID* terminated - storage media inaccessible.

Explanation

During the indicated operation, a required volume cannot be mounted.

System action

The indicated process ends.

User response

If possible, correct the problem and restart the operation.

ANR10 Operation 97E process *process ID* terminated - data transfer interrupted.

Explanation

During the indicated operation, a data transfer operation is interrupted and cannot be continued.

System action

The indicated process ends.

User response

If possible, correct the problem and restart the operation.

ANR10 Operation 98E process *process ID* terminated - file deleted from data storage during retrieval.

Explanation

During the indicated operation, a file was

deleted from data storage during retrieval.

System action

The indicated process ends.

User response

None.

ANR10 Operation 99E process *process ID* terminated - thread resource not available.

Explanation

During the indicated operation, the server cannot start a thread.

System action

The indicated process ends.

User response

The problem may indicate a shortage of memory. If necessary, make more memory available to the server, and then restart the operation.

ANR11 Migration 00I started for volume *volume name*, storage pool *storage pool name* (process number *process ID*).

Explanation

Because the high migration threshold for the indicated storage pool has been exceeded, migration of files from the volume shown begins.

System action

The system moves the data from this volume to the next (target) pool.

User response

None.

ANR11 01I Migration ended for volume *volume name*.

Explanation

Because the low migration threshold for the indicated storage pool has been reached, migration of files from the indicated volume ends.

System action

None.

User response

None.

ANR11 02I Removable volume *volume name* is required for migration.

Explanation

During migration processing, the server determines that a removable volume is required in order to complete processing.

System action

The server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

ANR11 04E Operation process process ID terminated - NAS datamover name reported NDMP session errors.

Explanation

During the indicated operation, the NDMP session with the NAS file server reported errors which prevent the operation from continuing.

System action

The indicated process ends.

User response

For details about how to identify the cause of the terminated NDMP operations, see the NAS file-server documentation. Check the NDMP logs for the NAS file server and, if possible, correct the cause of the errors and restart the operation.

ANR11 06W An incorrect destination storage pool *storage pool name* was specified for storing a table of contents for an image. A table of contents will not be created for the image.

Explanation

While attempting to store an image object, the server determined that the indicated

table of contents (TOC) destination storage pool was invalid. The indicated storage pool is used because it is specified as the copy group TOC destination of the assigned management class.

This storage pool could be invalid for any of the following reasons:

- The storage pool is not defined
- The storage pool is not a primary storage pool
- The storage pool has a data format other than NATIVE or NONBLOCK

System action

The operation continues because TOC creation is preferred, but not required. A TOC will not be created for the stored image object.

User response

This message usually indicates a configuration problem with either the storage pool or the policy. Ensure that the TOC destination storage pool has appropriate attributes, including data format. Check the copy group of the assigned management class. If the TOC destination is incorrect, either assign a new management class, or change the TOC destination in the copy group and activate the changed policy.

ANR11 07E An incorrect destination storage pool *storage pool name* was specified for

storage of a table of contents for an image object. The backup operation fails.

Explanation

While attempting to store an image object, the server determined that the indicated table of contents (TOC) destination storage pool was invalid. The indicated storage pool is used because it is specified as the copy group TOC destination of the assigned management class.

This storage pool could be invalid for any of the following reasons:

- The storage pool is not defined
- The storage pool is not a primary storage pool
- The storage pool has a data format other than NATIVE or NONBLOCK

System action

The operation fails.

User response

This message usually indicates a configuration problem with either the storage pool or the policy. Ensure that the TOC destination storage pool has appropriate attributes, including data format. Check the copy group of the assigned management class. If the TOC destination is incorrect, either assign a new management class, or change the TOC destination in the copy

group and activate the changed policy.

ANR11 08W The server is unable to create a table of contents for node *node name*, file space *file space* in storage pool *storage pool name*.

Explanation

While attempting to create a table of contents (TOC) for the specified node and file space in the indicated TOC destination pool, a failure occurred.

System action

The operation continues because TOC creation is preferred, but not required. A TOC will not be created for the stored image object.

User response

Look for previous messages giving a specific reason for the failure. Take corrective action as appropriate.

ANR11 09W Command: A table of contents was requested, but there is no table of contents destination storage pool specified. The table of contents will not be created, but the operation continues.

Explanation

While preparing to create a table of contents (TOC), the server determined that the TOC destination storage pool is not specified in the backup copy group for the assigned management class.

System action

The operation continues because TOC creation is preferred, but not required. A TOC will not be created.

User response

This message indicates a configuration problem with the policy. Either assign a new management class with appropriate attributes, or correct the assigned management class by setting the TOC destination in the backup copy group and activating the changed policy.

ANR11 10E Command: A table of contents was requested, but there is no table of contents destination storage pool specified. The table of contents can not be created and the operation fails.

Explanation

While preparing to create a table of contents (TOC), the server determined that the TOC destination storage pool is not specified in the backup

copy group for the assigned management class.

System action

The operation fails.

User response

This message indicates a configuration problem with the policy. Either assign a new management class with appropriate attributes, or correct the assigned management class by setting the TOC destination in the backup copy group and activating the changed policy. If a TOC is not required, change the value of the TOC parameter on the command.

ANR11 11E Command: An incorrect message number, *message number*, was specified.

Explanation

A MSGSTACKTRACE ENABLE or MSGSTACKTRACE DISABLE command has been entered that specifies an invalid message number. Messages must be between 3 and 8 digits. No letters are allowed on message numbers.

System action

The server does not process the command.

User response

Reissue the command with a valid message number.

ANR11 12W Command: No table of contents destination storage pool available for backup set for node *Node name* (data type *data type*). The table of contents will not be created.

Explanation

While preparing to create a table of contents (TOC), the server determined that the TOC destination storage pool is not specified in the backup copy group for the assigned management class.

System action

The operation continues because TOC creation is preferred, but not required. A TOC will not be created.

User response

This message indicates a configuration problem with the policy. Either assign a new management class with appropriate attributes, or correct the assigned management class by setting the TOC destination in the backup copy group and activating the changed policy.

ANR11 13E Command: No table of contents destination storage pool

available for backup set for node *Node name* (data type *data type*). The backup set will not be generated.

Explanation

While preparing to create a table of contents (TOC), the server determined that the TOC destination storage pool is not specified in the backup copy group for the assigned management class.

System action

The operation fails.

User response

This message indicates a configuration problem with the policy. Either assign a new management class with appropriate attributes, or correct the assigned management class by setting the TOC destination in the backup copy group and activating the changed policy. If a TOC is not required, change the value of the TOC parameter on the command.

ANR11 Command: No 14E nodes or data types are eligible for a backup set operation.

Explanation

None of the specified nodes or data types are eligible to be included in the backup set for the GENERATE BACKUPSET

or DEFINE BACKUPSET command.

System action

The operation fails.

User response

Check previous messages for problem determination information.

ANR11 Error initiating 15W migration for storage pool *storage pool name* - lock conflict.

Explanation

While trying to start migration for the indicated storage pool, the server needs to obtain a lock that is not available.

System action

Migration stops. The server waits for the retry period to expire and then tries the migration again.

User response

Wait for the server to retry the migration.

ANR11 Error initiating 16W migration for storage pool *storage pool name* - sufficient memory is not available.

Explanation

While trying to start migration for the indicated storage pool, there is not enough server memory available.

System action

Migration stops. The server waits for the retry period to expire and then tries the migration again.

User response

If necessary, make more memory available to the server.

ANR11 Error initiating 17W migration for storage pool *storage pool name* - internal server error detected.

Explanation

While trying to start migration for the indicated storage pool, the server encounters an internal error.

System action

Migration stops. The server waits for the retry period to expire and then tries the migration again.

User response

Contact your service representative.

ANR11 Command: 18I Table of contents successfully generated for node *Node name*, backup set *backup set name*.

Explanation

You requested a table of contents to be generated for the specified backup set and data type. The table of contents was successfully generated.

System action

Server operation continues.

User response

None.

ANR11 Command: 19W Table of contents already exists for node *Node name*, backup set *backup set name* (data type *data type*). The table of contents will not be created.

Explanation

You requested a table of contents to be generated for the specified backup set and data type, but the table of contents already exists.

System action

The server will not generate a table of contents for this backup set and data type.

User response

If the specified backup set name and data type are not correct, re-issue the command with the correct parameters.

ANR11 Migration is 20W ended for volume *volume name*. The process is canceled.

Explanation

During migration for the indicated volume, the process performing

the migration has been canceled.

**removable
media.**

**were
encountered.**

**subordinate
storage pools.**

System action

The migration process stops. If other migration processes are running, these processes will continue migration.

User response

None.

ANR11 Migration is ended for volume *volume name* - storage. Media is inaccessible.

Explanation

During migration for the indicated volume a required volume cannot be mounted.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

One possible cause for this failure is that the access state for the target volume or storage pool for this operation is not set to READWRITE. Check the access state for the requested output volume and storage pool and ensure they are set to ACCESS=READWRITE.

ANR11 Migration is ended for volume *volume name*. An insufficient number of mount points are available for

Explanation

During migration for the indicated volume the server could not allocate sufficient mount points for the volumes required.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

If necessary, make more mount points available.

ANR11 Migration is ended for volume *volume name*. Excessive read errors were encountered.

Explanation

During migration for the indicated volume, read errors occurred that prevent the migration from continuing.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

If possible, correct the cause of the read errors.

ANR11 Migration is ended for volume *volume name*. Excessive write errors

Explanation

During migration for the indicated volume, write errors occurred that prevent the migration from continuing.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

If possible, correct the cause of the write errors.

ANR11 Migration is ended for volume *volume name*. Data transfer is interrupted.

Explanation

During migration for the indicated volume a data transfer operation was interrupted and could not be continued.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

If possible, determine and correct the cause of the interruption.

ANR11 Migration is ended for volume *volume name*. There is insufficient space in

Explanation

During migration for the indicated volume, the server cannot move the data from the volume because there is not enough space on the next storage pool, or the next storage pool is not defined.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Ensure that the next storage pool is defined, and make more space available in the next storage pool. Use the UPDATE STGPOOL command to change the next storage pool to one with more space.

ANR11 Migration is ended for volume *volume name*. - The server is unable to move files to subordinate storage pools because the files are too large.

Explanation

During migration for the indicated volume, the server cannot move the data from the volume because a file size is larger than allowed on the next storage pool.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Use the UPDATE STGPPOOL command to change the next storage pool maximum file size or to change the next storage pool target.

ANR11 Migration is ended for 28E ended for volume *volume name*. Sufficient recovery log space is not available.

Explanation

During migration for the indicated volume, the server runs out of recovery log space.

System action

Migration stops.

User response

If necessary, make more server recovery log space available.

ANR11 Migration is ended for 29E ended for volume *volume name*. Sufficient database space is not available.

Explanation

During migration for the indicated volume pool, the server runs out of database space.

System action

Migration stops.

User response

If necessary, make more server database space available.

ANR11 Migration is ended for 30E ended for volume *volume name*. There is a lock conflict.

Explanation

During migration for the indicated volume, the server needs to obtain a lock that is not available.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Wait for the server to try the migration again.

ANR11 Migration is ended for 31E ended for volume *volume name*. A thread resource is not available.

Explanation

During migration for the indicated volume, the server cannot start a thread for the migration process.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Wait for the server to try the migration again.

If the error persists, it might indicate a shortage of server memory.

ANR11 Migration is ended for 32E ended for volume *volume name*. Sufficient memory is not available.

Explanation

During migration for the indicated volume, there is not enough server memory available.

System action

Migration stops.

User response

If necessary, make more memory available to the server.

ANR11 Migration is ended for 33E ended for volume *volume name*. An internal server error is detected.

Explanation

During migration for the indicated volume, the server encounters an internal error.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Contact your service representative.

ANR11 Migration is ended for 34E ended for storage pool

storage pool name. There is an insufficient number of mount points available for removable media.

Explanation

During migration for the indicated storage pool the server could not allocate sufficient mount points in the next storage pool.

System action

Migration stops. The server waits for the retry period to expire and then tries the migration again.

User response

If necessary, make more mount points available.

ANR11 Migration is ended for 35E ended for volume *volume name*. The transaction is ended.

Explanation

During migration for the indicated volume, the server detected an error while attempting to commit a transaction.

System action

Migration of the volume stops. If other migration processes are running, these processes will continue migration.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR11 36W *Operation process process ID completed - There is no data to process for the differential backup of NAS node node name, file space file space.*

Explanation

The NAS file server reported zero bytes stored at the conclusion of an NDMP backup of the specified file space. The command ends without updating the server's database.

System action

The indicated process ends.

User response

None.

ANR11 37E *Operation process process ID terminated - object excluded by size in destination storage pool and all successor pools.*

Explanation

During the indicated operation, the size of a file sent from the client node is larger than that allowed in the destination storage pool. No successor storage pools can accept the large file.

System action

The indicated process ends.

User response

Increase the maximum file size for one or more of the storage pools in the storage hierarchy to accommodate the file. An authorized administrator can increase the MAXSIZE parameter by issuing the UPDATE STGPOOL command.

ANR11 38E *Invalid destination storage pool specified for retention rule: storage pool.*

Explanation

The storage pool specified in the DESTINATION keyword for the DEFINE RETRULE or UPDATE RETRULE is not a retention storage pool.

System action

The operation fails.

User response

Select a retention storage pool (POOLTYPE=RETENTION) for the DESTINATION parameter of the DEFINE RETRULE or UPDATE RETRULE command.

ANR11 39E *The command name command failed because some data was missing.*

Explanation

An attempt to gather database statistics from the database manager failed. This failure can occur if either of these conditions is met:

- The buffer pool monitor switch (DFT_MON_BUFPOOL) has been set to 'OFF'. The buffer pool monitor switch controls the collection of database statistics.
- The file systems or drives are in a remote network. There might be a network problem causing the server fail to collect the statistics of those volumes.

System action

The command fails, and the server operation continues.

User response

Take one of the following actions, and then try running the QUERY DBSPACE command again:

- Stop and restart the server.
- Set the buffer pool monitor switch to 'ON' using this Db2 command: 'db2 update dbm cfg using DFT_MON_BUFPOOL ON'.
- If you cannot obtain drive or file system statistics by running operating system commands, fix the problem, then try running the command again.

ANR11 40I *Move data process started for volume volume name (process ID process ID).*

Explanation

As a result of a MOVE DATA command, a process begins to move data from the volume shown.

System action

The server moves all data from the volume.

User response

None.

ANR11 41I *Move data process ended for volume volume name.*

Explanation

The MOVE DATA command for the volume shown completes.

System action

None.

User response

None.

ANR11 42I *Moving data for collocation cluster cluster number of total clusters on volume volume name.*

Explanation

As a result of a MOVE DATA command, data moves from the volume indicated to new volumes; the message shows the total number of clusters (data objects) on the volume and the current cluster being processed.

System action

None.

User response

None.

**ANR11 Move data
43W process
terminated for
volume *volume
name* - process
canceled.**

Explanation

During move data processing for the indicated volume, the process performing the move data was canceled. It is possible that the server may issue this message more than once while the server is ending this process.

System action

The server ends the MOVE DATA command.

User response

None.

**ANR11 Move data
44W process
terminated for
volume *volume
name* - storage
media
inaccessible.**

Explanation

During move data processing for the indicated volume, a required volume cannot be mounted.

System action

The server ends the MOVE DATA command.

User response

None.

**ANR11 Move data
45W process
terminated for
volume *volume
name* -
insufficient
number of
mount points
available for
removable
media.**

Explanation

During move data processing for the indicated volume, the server could not allocate sufficient mount points for the volumes required.

System action

The server ends the MOVE DATA command.

User response

If necessary, make more mount points available.

**ANR11 Move data
46W process
terminated for
volume *volume
name* -
excessive read
errors
encountered.**

Explanation

During move data processing for the indicated volume, read errors occurred that prevented the move from continuing.

System action

The server ends the MOVE DATA command.

User response

If possible, correct the cause of the read errors and then reissue the MOVE DATA command.

**ANR11 Move data
47W process
terminated for
volume *volume
name* -
excessive write
errors
encountered.**

Explanation

During move data processing for the indicated volume, write errors occurred that prevented the move from continuing.

System action

The server ends the MOVE DATA command.

User response

If possible, correct the cause of the write errors and then reissue the MOVE DATA command.

**ANR11 Move data
48W process
terminated for
volume *volume
name* - data
transfer
interrupted.**

Explanation

During move data processing for the indicated volume a data transfer operation was interrupted and could not be continued.

System action

The server ends the MOVE DATA command.

User response

If possible, determine and correct the cause of the interruption.

**ANR11 Move data
49W process
terminated for
volume *volume
name* -
insufficient
space in target
storage pool.**

Explanation

During move data processing for the indicated volume, the server cannot move the data from the volume, because there is not enough space on the destination storage pool to hold it or the access for the storage pool is either unavailable or readonly.

System action

The server ends the MOVE DATA command.

User response

Make more space available in the next storage pool, or specify a storage pool with more space, and reissue the MOVE DATA command.

**ANR11 Move data
50W process
terminated for
volume *volume
name* - unable
to move file to
target storage
pool due to
exclusion by
size.**

Explanation

During move data processing for the indicated volume, the

server cannot move the data from the volume because a file size is larger than allowed on the next storage pool.

System action

The server ends the MOVE DATA or MOVE NODEDATA command.

User response

Use the UPDATE STGPOOL command to change the next storage pool maximum file size or to change the next storage pool target, and then reissue the MOVE DATA or MOVE NODEDATA command.

ANR11 Move data 51W process terminated for volume *volume name* - sufficient recovery log space is not available.

Explanation

During move data processing for the indicated volume, the server runs out of recovery log space.

System action

The server ends the MOVE DATA command.

User response

If necessary, make more server recovery log space available.

ANR11 Move data 52W process terminated for volume *volume name* - sufficient

database space is not available.

Explanation

During move data processing for the indicated volume, the server runs out of database space.

System action

The server ends the MOVE DATA command.

User response

If necessary, make more server database space available.

ANR11 Move data 53W process terminated for volume *volume name* - lock conflict.

Explanation

During move data processing, the server was unable to obtain the volume specified because a lock was not available or a restartable restore is active for data on the volume and has it locked. .

System action

The server ends the MOVE DATA command.

User response

Check for restartable restores by issuing the QUERY RESTORE command. If the volume specified contains any data from the node and filespace identified by the QUERY RESTORE command, the MOVE DATA command will fail.

The restartable restores must complete or be cancelled before the MOVE DATA command can succeed.

If the volume does not contain data from the node and filespace identified by the QUERY RESTORE command, the reissue the MOVE DATA command.

ANR11 Move data 54W process terminated for volume *volume name* - thread resource not available.

Explanation

During move data processing for the indicated volume, the server cannot start a thread for the migration process.

System action

The server ends the MOVE DATA command.

User response

Reissue the MOVE DATA command. If the error persists, it may indicate a shortage of server memory.

ANR11 Move data 55W process terminated for volume *volume name* - sufficient memory is not available.

Explanation

During move data processing for the indicated volume, there

is not enough server memory available.

System action

The server ends the MOVE DATA command.

User response

If necessary, make more memory available to the server, and then reissue the MOVE DATA command.

ANR11 Move data 56W process terminated for volume *volume name* - internal server error detected.

Explanation

During move data processing for the indicated volume, the server encounters an internal error.

System action

The server ends the MOVE DATA command.

User response

Contact your service representative.

ANR11 Removable 57I volume *volume name* is required for move process.

Explanation

During move data or move node data processing, the server determines that the indicated removable volume is required in order to complete processing.

System action

The server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

ANR11 Retention set 58I *retsetid, node nodename, file space fsname flag set to flag, number of recoverable files is number of recoverable files, number of unrecoverable files is number of unrecoverable files.*

Explanation

A destructive command (for example, DELETE VOLUME) was issued by an administrator that affects files that are in one or more retention sets. For each affected retention set, node, and file space, the number of recoverable and unrecoverable files is indicated. A file is recoverable if it still exists in operational data. A file is unrecoverable if a replacement copy is not located in operational data.

For inventory-only retention sets, the state of the retention set is set to INCOMPLETE and the job state is set to TERMINATED.

For retention sets that are stored on tape, if files are available in operational data, the

state of the retention set is set to COPYING and the job state is set to INTERRUPTED. If you want those files to be re-copied to the retention set, use the RESUME JOB command to set the job status to SLEEPING and start the storage rule for the destination storage pool for the retention set. Or if the storage rule is enabled, you may wait until the storage rule starts during its normal cycle.

For retention sets that are stored on tape, if no affected files are recoverable, the job status is updated to TERMINATED and the retention set state is set to INCOMPLETE.

Affected files not in operational data cannot be recovered. Consult with you compliance team to determine what subsequent actions need to be taken.

Following are the flag states that may be indicated by this message:

- INCOMPLETE. An error occurred during retention set processing which prevents all files from being successfully being copied to the retention set.
- COPYING. The retention set is being created.

Note that some of these operations might affect many retention sets and involve many objects. In these cases, to prevent pinning the active log, the work is performed with more than one database transaction.

This message is issued once for each affected node and file space for each transaction for each affected retention set.

System action

System operation continues.

User response

Examine the messages issued and take appropriate action.

ANR11 Retention set 59E *retsetid, total number of recoverable files is number of recoverable files, total number of unrecoverable files is number of unrecoverable files.*

Explanation

A destructive command (for example, DELETE VOLUME) was issued by an administrator that affects files that are in one or more retention sets. For each affected retention set for which there are affected files, this message is issued. It indicates the total number of recoverable and unrecoverable files for each affected retention set for the destructive command.

Note that some of these operations might affect many retention sets and involve many objects. In these cases, to prevent pinning the active log, the work is performed with more than one database transaction. This message is issued once for each

transaction for each affected retention set.

System action

System operation continues.

User response

Examine the messages issued and take appropriate action. If the retention set was in state Copying, the retention set state remains Copying and the associated job status is set to Interrupted. You may resume the job and allow the storage rule to continue copying files to the retention set. But if there are unrecoverable files, the final state of the retention set will be Incomplete after the copy operation completes. Or you may choose to terminate the job in which case any files that are already successfully copied to the retention set are available to be restored from the retention set.

ANR11 Transaction was 60W *aborted for volume volume name.*

Explanation

An error was detected during transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR11 61W The move process is skipping a damaged file on volume *volume name*: Node *node name*, Type *file type*, File space *filespace name*, File name *file name*.

Explanation

During the move process, a file is encountered that was previously found to be damaged. If this file is part of an aggregate, the entire aggregate was previously marked damaged, possibly because an error was detected for some other file within the aggregate.

System action

The damaged file is not moved.

User response

Perform the following actions:

- Audit the indicated volume with FIX=NO to verify that the file is damaged. The audit will reset the file status if the file is found to be undamaged during the audit. If the file is part of an aggregate, the audit will reset the aggregate

status if the entire aggregate is found to be undamaged.

- If this volume is in a primary storage pool that has previously been backed up to a copy storage pool, attempt to restore damaged files by using the RESTORE STGPOOL command.

ANR11 62W Space reclamation skipping damaged file on volume *volume name*: Node *node name*, Type *file type*, File space *filespace name*, File name *file name*.

Explanation

During reclamation, a file is encountered that was previously found to be damaged. If this file is part of an aggregate, the entire aggregate was previously marked damaged, possibly because an integrity error was detected for some other file within the aggregate.

System action

The damaged file is not moved.

User response

Audit the indicated volume with FIX=NO to verify that the file is damaged. The audit will reset the file status if the file is found to be undamaged during the audit. If the file is part of an aggregate, the audit will reset the

aggregate status if the entire aggregate is found to be undamaged. If this volume is in a primary storage pool that has previously been backed up to a copy storage pool, attempt to restore damaged files by using the RESTORE STGPOOL command.

ANR11 63W Offsite volume *volume name* still contains files which could not be moved.

Explanation

During processing of a MOVE DATA command or reclamation, the server determined that the indicated offsite volume contained one or more files that could not be moved. One or more files could not be copied from the other available volumes.

The server might not move some files if the storage pool is collocated and the volume being moved or reclaimed contains files that require different output volumes. The server will skip these files and no messages are issued identifying the skipped files. The files are skipped to honor the collocation attribute of the storage pool.

If the files in the storage pool are deduplicated, they could be skipped due to the unavailability of an on-site copy. This can occur if the file has been logically deleted from all other storage pools due to either policy retention settings, or explicit deletion, but

must remain in the offsite storage pool due to deduplication dependencies.

System action

None.

User response

Check for messages that indicate why files could not be moved. To complete the move operation, you have several options:

- Bring the volume back on-site and reissue a MOVE DATA command to reclaim the volume. If the storage pool is deduplicated and all primary storage pool volumes are available, this is the recommended solution.
- Make the primary volumes available and reissue a MOVE DATA command to reclaim the volume.
- Delete the files by using the DELETE VOLUME command.

If the server is skipping files to honor the collocation attribute of the storage pool, run the MOVE DATA command, or wait until reclamation runs again. In either case, the server will move files to the appropriate output volumes until the volume being moved or reclaimed is empty. It might take more than one attempt to totally empty the volume.

ANR11 65E Error detected for file in storage pool *storage pool name*: Node *node name*,

Type file type,
File space
filesystem name,
fsId filesystem id,
File name file
name.

Explanation

The server has detected an error for the indicated file.

System action

The file will be marked damaged in the server database, and will not be accessed for future operations. If this file is part of an aggregate, the entire aggregate will be marked damaged. If a usable copy of the file exists in another storage pool, that copy may be accessed for future operations involving the file.

User response

If the indicated storage pool is a primary pool, and a usable copy of the file exists in a copy storage pool, you can recreate the file in the primary pool using the RESTORE STGPOOL command. If the indicated storage pool is a copy storage pool, it is possible that the primary copy of the file is usable, but was not accessed because the access mode for the primary storage pool or volume is unavailable. If this is the case, the primary copy of the file may be made accessible by changing the access mode of the primary pool or volume.

ANR11 66E Move Data for offsite volume cannot copy damaged file in storage pool
storage pool name: Node node name,
Type file type,
File space filesystem name,
fsId filesystem id,
File name file name.

Explanation

A move data process for an offsite volume cannot locate an undamaged copy of the specified file in any storage pool accessible by the server. If this file is part of an aggregate, the process could not locate an undamaged copy of the aggregate to which the file belongs.

System action

The file will be skipped and will not be moved from the offsite volume.

User response

The indicated storage pool is a primary pool that contains a damaged copy of the file. The only usable copy of the file may now only reside on the offsite volume that was involved in the move data process. If you bring this volume back onsite, you can recreate the file in the primary pool by using the RESTORE STGPOOL command. After the restore, you can reissue the MOVE DATA command.

ANR11 67E Space reclamation for

offsite volume
volume name
cannot copy
damaged file in
storage pool
storage pool name: Node node name,
Type file type,
File space filesystem name,fsId filesystem id , File name file name.

Explanation

A reclamation process of offsite volumes cannot locate an undamaged copy of the specified file in any storage pool accessible by the server. If this file is part of an aggregate, the process could not locate an undamaged copy of the aggregate to which the file belongs.

System action

The file is skipped and will not be moved from the offsite volume.

User response

The indicated storage pool is a primary pool that contains a damaged copy of the file. The only usable copy of the file may now only reside on an offsite volume that was involved in the reclamation process, but was not totally reclaimed. If you bring this volume back onsite, you can recreate the file in the primary pool by using the RESTORE STGPOOL command.

ANR11 68W Migration skipping damaged file on

volume volume name: Node node name,
Type file type,
File space filesystem name,
fsId filesystem id,
File name file name.

Explanation

During migration, a file is encountered that was previously found to be damaged. If this file is part of an aggregate, the entire aggregate was previously marked damaged, possibly because an integrity error was detected for some other file within the aggregate.

System action

The damaged file will not be moved.

User response

Audit the indicated volume with FIX=NO to verify that the file is damaged. The audit will reset the file status if the file is found to be undamaged during the audit. If the file is part of an aggregate, the audit will reset the aggregate status if the entire aggregate is found to be undamaged. If this volume is in a primary storage pool that has previously been backed up to a copy storage pool, you can also attempt to restore damaged files by using the RESTORE STGPOOL command.

ANR11 69W Lock conflict on movement of offsite file - file is skipped.

Explanation

During migration, reclamation, or move data processing of a volume that is offsite, a copy of the file that resides in a primary disk storage pool is locked by another process.

System action

The file is skipped and the process will try to find another copy of the file in a copy storage pool. If another copy cannot be used, the move operation on the volume may be incomplete.

User response

If a move operation was incomplete, try repeating the operation.

ANR11 Out of Space in target copy storage pool: copy storage pool name.
70E

Explanation

During reclamation, or move data processing of a volume that is offsite, there was no volume available in the specified target copy storage pool.

System action

The operation is terminated.

User response

Define volumes to the copy storage pool or raise the MAXSCRATCH value.

ANR11 Unable to move files associated with node node name, filesystem name
71W

fsId filesystem id on volume volume name due to restore in progress.

Explanation

During movement of data (migration, reclamation, move data) from a sequential volume, one or more files were encountered that were locked by a restore operation.

System action

The files are not moved, but are skipped.

User response

Use the QUERY RESTORE FORMAT=DETAILED command to determine if the restore operation is active or is in restartable state. A restartable restore operation will keep the files locked from movement until the RESTOREINTERVAL is reached. QUERY OPTION will display this interval. You may wish to lower the RESTOREINTERVAL to cause a restartable restore operation to be removed and free up the locked files. The RESTOREINTERVAL is a server option. If you received this message due to a MOVE DATA operation, reissue the MOVE DATA command after the restore operation has completed in order to move any remaining files.

ANR11 Move Data for offsite volume cannot copy file in storage pool storage pool
72E

name: Node node name, Type file type, File space filesystem name, fsId filesystem id, File name file name.

Explanation

A move data process for an offsite volume cannot locate a copy of the specified file in any storage pool accessible by the server. If this file is part of an aggregate, the process could not locate copy of the aggregate to which the file belongs on an accessible volume.

System action

The file will be skipped and will not be moved from the offsite volume.

User response

The indicated storage pool is a primary pool that should contain a primary copy of the file. Perhaps the volume on which that file resides is on a destroyed volume. The only usable copy of the file may now only reside on the offsite volume that was involved in the move data process. If you bring this volume back onsite, you can recreate the file in the primary pool by using the RESTORE STGPPOOL command. After the restore, you can reissue the MOVE DATA command.

ANR11 Space reclamation for offsite volume(s) cannot copy file in storage pool
73E

storage pool name: Node node name, Type file type, File space filesystem name, fsId filesystem id, File name file name.

Explanation

A reclamation process of offsite volumes cannot locate a copy of the specified file in any storage pool accessible by the server. If this file is part of an aggregate, the process could not locate a copy of the aggregate to which the file belongs on an accessible volume.

System action

The file is skipped and will not be moved from the offsite volume.

User response

The indicated storage pool is a primary pool that should contain a copy of the file. Perhaps the volume on which that file resides is on a destroyed volume. The only usable copy of the file may now only reside on an offsite volume that was involved in the reclamation process, but was not totally reclaimed. If you bring this volume back onsite, you can recreate the file in the primary pool by using the RESTORE STGPPOOL command.

ANR11 One or more cached files were not deleted on volume volume name.
74W

Explanation

The MOVE DATA command could not delete one or more cached files on the disk volume shown. Migration was probably running at the same time, creating cached files while the MOVE DATA command was trying to delete them.

System action

The MOVE DATA command ran to completion.

User response

If you want the remaining cached files removed from the disk volume, reissue the MOVE DATA command.

ANR11 Volume volume 75W *name contains files which could not be reclaimed.*

Explanation

After reclamation of the indicated volume, it still contains one or more files that could not be reclaimed. These files were skipped because of read errors, or because the files are marked damaged.

System action

The volume is marked unavailable so it will not be chosen again for reclamation.

User response

- Use the UPDATE VOLUME command to set the volume access to readonly.

- Try using the MOVE DATA command to manually reclaim the volume.
- If files still exist on the volume, audit the volume using AUDIT VOLUME FIX=YES.
- Try using the MOVE DATA command again.
- Use the RESTORE VOLUME command to restore files marked damaged.

ANR11 Moving data for 76I *collocation set set number of total sets on volume volume name.*

Explanation

As a result of a move operations, such as MOVE DATA, MOVE NODEDATA, migration, or reclamation, the server is moving data from the volume indicated to new volumes. This message shows the total sets of data on the volume to be processed. Depending upon the collocation setting of the destination storage pool, a set can be file spaces that belong to the same collocation group, file spaces for a node, or a single file space.

System action

None.

User response

None.

ANR11 Copying active 78I *files from primary storage pool primary pool name to*

active data pool active data pool name started as process process ID.

Explanation

A process has been started to copy active data from a primary storage pool to the indicated active data.

System action

For every noncached, active file in the primary pool, a copy is made in the active data pool, if a copy of that file does not already exist.

User response

None.

ANR11 Preview of 79I *copying active files from primary storage pool primary pool name to active data pool active data pool name started as process process ID.*

Explanation

A preview process has been started to copy active data from a primary storage pool to the indicated active data pool.

System action

Preview information about the COPY ACTIVATEDATA operation is collected and displayed, but files are not copied.

User response

None.

ANR11 Retention set 80W *retsetid, total number of recoverable files is number of recoverable files.*

Explanation

A destructive command (for example, DELETE VOLUME) was issued by an administrator that affects files that are in one or more retention sets. For each affected retention set for which all files are recoverable, this message is issued. Recoverable means that the files still exist in operational data. If you resume the associated job and start the storage rule associated with the retention storage pool, the missing files from the retention set are recovered from the operational data copies. Note, that until the job completes copying those files to the retention set, those files could be lost from operational data and consequently cannot be copied to the retention set.

Note that some of these operations might affect many retention sets and involve many objects. In these cases, to prevent pinning the active log, the work is performed with more than one database transaction. This message is issued once for each transaction for each affected retention set.

System action

System operation continues.

User response

Examine the messages issued and take appropriate action. Note that the counts in this message reflect the effect of the particular destructive command that was issued on the retention set.

ANR11 Diagnostic(ID): 81E Data storage transaction transaction ID was aborted.

Explanation

A database transaction failed because of an error that was detected during data storage processing. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The server operation that encountered this error during data storage processing fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR11 Removable 82I volume volume name is required for a restore request from session session id.

Explanation

A restore request will need a removable volume. This message is issued as soon as the server determines that the volume will be needed. A mount request will be made when the volume is actually needed for processing. When the first pass determination of needed volumes is complete, message ANR1183I will be issued. However, it is possible that additional volumes will be needed later, as indicated in the explanation for message ANR1183I. This message is not issued for DISK device class volumes nor is it issued for FILE device class volumes.

System action

The server continues processing.

User response

Respond to any mount request for the indicated volume.

ANR11 Initial 83I determination of removable volumes required for a restore request from session session id is complete. Additional volumes may still be required.

Explanation

The first pass determination of needed volumes is complete for the indicated restore session. It is possible that

additional volumes will be needed as individual objects are restored. This can happen for a variety of reasons. Examples of such reasons include: 1. An object spanning from one volume to another, where the second volume is not needed for any other objects during this restore session. 2. An object is found to be damaged and a copy storage pool volume is needed to complete the restore. 3. A volume is unavailable and a copy storage pool volume is needed to complete the restore.

System action

The server continues processing.

User response

Respond to any mount request for any additional volumes.

ANR11 Copy active data 84I process process ID ended for storage pool storage pool name.

Explanation

A COPY ACTIVATEDATA process for the named primary storage pool has ended.

System action

None.

User response

None.

ANR11 Copy active data 85I process process ID terminated for storage pool

storage pool name - process canceled.

Explanation

While copying active data from the indicated primary storage pool, a process performing the operation has been canceled.

System action

If other copy active data processes are executing for the named storage pool, these processes continue.

User response

None.

ANR11 Restore of node 86I nodename, file system file system, started as process process ID by administrator administrator. A full image for this file system will be restored to destination destination.

Explanation

The administrator initiates a restore of the node's file system. The restore will be performed using a full image of this file system. The file system will be restored to the indicated destination.

System action

The indicated process is started.

User response

None.

**ANR11 Removable
89I volume *volume
name* is
required for
copying active
data.**

Explanation

During processing of a COPY ACTIVE DATA command, the server determines that a removable volume is required.

System action

Unless this is a preview process, the server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

**ANR11 Removable
99I volume *volume
name* is
required for
audit process.**

Explanation

During audit volume processing for the indicated volume, the server determines that a removable volume is required in order to complete processing.

System action

The server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

**ANR12 Large object
00W splitting of**

**backup data for
node *node name*
is disabled.**

Explanation

To optimize server processing, this object should be split when it is stored in either a directory-container or cloud-container storage pool. The value that was set in the SPLITLARGEOBJECTS parameter for the node is preventing the object from being stored in split format.

System action

The server will store the object as a single, large object.

User response

Change the SPLITLARGEOBJECTS parameter for the node definition to Yes using the UPDATE NODE command. Then, reissue the BACKUP NODE command.

**ANR12 One or more
05I offsite retention
volumes in
retention
storage pool
pool_name
cannot be
reclaimed
because offsite
reclamation is
not supported
for volumes in
retention
storage pools.**

Explanation

Offsite reclamation is not supported for volumes in storage pools that are defined with the

POOLTYPE=RETENTION parameter setting.

System action

The reclamation process skips the offsite volumes.

User response

Bring the volumes back onsite. Then, rerun space reclamation by taking one of the following actions:

- Issue the RECLAIM STGPPOOL command.
- Specify the storage pool reclamation threshold to ensure that reclamation is run automatically. The threshold must be less than the percentage of reclaimable space for the volume that is being reclaimed. You can change the volume reclamation threshold in the Operations Center or by issuing the UPDATE STGPPOOL command and specifying the RECLAIM parameter.

**ANR12 Command: The
09E "option"
parameter is not
valid for a
retention
storage pool.**

Explanation

The command indicated specifies a parameter that is not valid for a retention storage pool.

System action

The server does not process the command.

User response

Reissue the command with parameters appropriate for a retention storage pool.

**ANR12 Backup of
10I primary storage
pool *primary
pool name* to
copy storage
pool *copy pool
name* started as
process *process
ID*.**

Explanation

A process has been started to back up a primary storage pool to the indicated copy storage pool.

System action

For every noncached file in the primary pool, a backup copy is made in the copy pool, if a copy of that file does not already exist.

User response

None.

**ANR12 Backup preview
11I of primary
storage pool
*primary pool
name* to copy
storage pool
copy pool name
started as
process *process
ID*.**

Explanation

A preview process has been started to back up a primary storage pool to the indicated copy storage pool.

System action

Preview information about the backup operation is collected and displayed, but files are not backed up.

User response

None.

ANR12 Backup process 12I *process ID ended for storage pool storage pool name.*

Explanation

A backup process for the named primary storage pool has ended.

System action

None.

User response

None.

ANR12 Backup process 13I *process ID terminated for storage pool storage pool name - process canceled.*

Explanation

During backup of the indicated primary storage pool, a process performing the backup has been canceled.

System action

If other backup processes are executing for the named storage pool, these processes continue.

User response

None.

ANR12 The backup of 14I *the primary pool name primary storage pool to the copy pool name copy storage pool is complete. Number of files backed up: number of backed up files. Number of bytes backed up: number of backed up bytes. Deduplicated bytes backed up: number of backed up dedup bytes. Unreadable files: number of unreadable files. Unreadable bytes: number of unreadable bytes.*

Explanation

Backup processing for the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all backup processes ended successfully.

ANR12 The backup 15I *preview of the primary pool name primary storage pool to the copy pool name copy storage pool is complete. Number of files*

backed up: number of backed up files. Number of bytes backed up: number of backed up bytes. Number of deduplicated bytes backed up: number of backed up dedup bytes.

Explanation

Backup preview processing for the specified storage pool ended with the displayed results.

System action

None.

User response

No action is required.

ANR12 Command: 16E *Process process ID terminated - storage media inaccessible.*

Explanation

During backup processing, a required volume could not be mounted.

System action

The indicated backup process ends.

User response

None.

ANR12 Command: 17E *Process process ID stopped - insufficient number of mount points available for*

removable media.

Explanation

During backup processing, the server could not allocate sufficient mount points for the volumes required.

System action

The indicated backup process ends.

User response

If necessary, make more mount points available. To prevent sessions or processes from having to wait for a mount point, increase the value of the MOUNTLIMIT parameter in the device-class definition. Set the value of the MOUNTLIMIT parameter high enough to allow all server processes using deduplicated storage pools to open the number of volumes specified by the NUMOPENVOLSAALLOWED option.

ANR12 Command: 18E *Process process ID terminated - excessive read errors encountered.*

Explanation

During backup processing, read errors occur that prevent the backup from continuing.

System action

The indicated backup process ends.

User response

If possible, correct the cause of the read errors and reissue the backup command.

ANR12 Command:
19E Process process ID terminated - excessive write errors encountered.

Explanation

During backup processing, write errors occur that prevent the backup from continuing.

System action

The indicated backup process ends.

User response

If possible, correct the cause of the write errors and reissue the backup command.

ANR12 Command:
20E Process process ID terminated - data transfer interrupted.

Explanation

During backup processing, a data transfer operation was interrupted and could not be continued.

System action

The indicated backup process ends.

User response

If possible, correct the cause of the interruption and reissue the backup command.

ANR12 Command:
21E Process process ID terminated - insufficient space in target storage pool pool name.

Explanation

During backup processing, the server cannot copy data to the specified copy or active-data storage pool because not enough space is available in the specified copy or active-data storage pool, or, the access for the copy or active-data storage pool is either unavailable or readonly.

System action

The indicated backup process ends.

User response

Make more space available in the copy or active-data storage pool and reissue the backup command, or reissue the backup command and specify another copy or active-data storage pool with more space.

ANR12 Command:
22E Process process ID was terminated because of insufficient recovery log space.

Explanation

If a log runs out of space, the current transaction is rolled back. The server issues an error message and halts. You cannot restart the server until

the recovery log size is increased.

System action

The server halts.

User response

Monitor archive logs and active logs. If the recovery log space is insufficient, monitor the archive log space first. If the archive log space is full or nearly full, run a full database backup to remove archive logs and consider adding more disk space to the archive log directory. If the archive log space is not full and the active log space is full or nearly full, update the value of the ACTIVELOGSIZE option in the dsmserv.opt file. Set the value of the ACTIVELOGSIZE option to the new maximum size of the active log.

ANR12 Command:
23E Process process ID was terminated because of insufficient database space.

Explanation

During backup processing, the server runs out of database space.

System action

The specified backup process ends.

User response

To increase the amount of database space that is available to the server, issue the EXTEND

DBSPACE command. Add one or more directories to the database.

ANR12 Command:
24E Process process ID terminated - lock conflict.

Explanation

During backup processing, the server needs to obtain a lock that is not available.

System action

The indicated backup process ends.

User response

Reissue the backup command.

ANR12 Command:
25E Process process ID terminated - thread resource not available.

Explanation

During backup processing, the server cannot start a thread.

System action

The indicated backup process ends.

User response

Reissue the backup command. If the error persists, it may indicate a shortage of server memory.

ANR12 Command:
26E Process process ID terminated - sufficient memory is not available.

Explanation

During backup processing, not enough server memory is available.

System action

The indicated backup process ends.

User response

If necessary, make more memory available to the server, and then reissue the backup command.

**ANR12 Command:
27E Process process
ID terminated -
internal server
error detected.**

Explanation

During backup processing, the server encounters an internal error.

System action

The indicated backup process ends.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages that indicate the source of the error.

**ANR12 Removable
28I volume volume
name is
required for
storage pool
backup.**

Explanation

During processing of a BACKUP STGPOOL command, the server determines that a removable volume is required.

System action

Unless this is a preview process, the server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

**ANR12 Volume volume
29W name is
inaccessible
therefore it
cannot be
backed up to a
copy storage
pool or copied to
an active-data
storage pool.**

Explanation

During storage pool backup or the copying of active data, the contents of a volume cannot be backed up or copied if one of the following conditions exists:

- The volume is offline.
- The volume is in use by another process.
- The volume cannot be mounted.
- The access mode of the volume does not allow the operation.

System action

The server continues backup processing, but skips the indicated volume.

User response

Take one of the following actions:

- If the volume is offline, issue the VARY ONLINE command for the indicated volume.
- If the access mode of the volume is unavailable, issue the UPDATE VOLUME command to change the access mode to readwrite or readonly. If the access mode of the volume is destroyed, verify with an administrator whether the access mode should be updated. If it should, issue the UPDATE VOLUME command to change the access mode to readwrite or readonly.
- If the volume is in use by another process, wait for that process to complete, and then retry the BACKUP STGPOOL command or the COPY ACTIVATEDATA command.
- If the volume is not currently mountable, verify that the drive can mount the volume, and then retry the BACKUP STGPOOL command or the COPY ACTIVATEDATA command.

**ANR12 Restore of
30I primary storage
pool primary
pool name
started as
process process
ID.**

Explanation

A process has been started to restore the

indicated primary storage pool.

System action

Non-cached files that reside in the named primary storage pool are restored if either of the following criteria are met:

- The file is stored on a volume whose access mode is destroyed
- The primary file has been identified as having data-integrity errors during a previous operation

User response

None.

**ANR12 Restore preview
31I of primary
storage pool
primary pool
name started as
process process
ID.**

Explanation

A preview process has been started to restore a primary storage pool.

System action

Preview information about the restore operation is collected and displayed, but files are not restored. The restore preview includes noncached files that reside in the specified primary storage pool and that meet either of the following conditions:

- The file is stored on a volume whose access mode is destroyed
- The primary file has been identified as having data-integrity

errors during a previous operation	restore preview includes noncached files that reside on selected volumes in the primary storage pool.	name - process canceled.	Number of bytes restored: <i>number of restored bytes.</i> Number of deduplicated bytes restored: <i>number of restored dedup bytes.</i> Number of unreadable files: <i>number of unreadable files.</i> Number of unreadable bytes: <i>number of unreadable bytes.</i>
User response None.	User response None.	Explanation During restore of the indicated primary storage pool, a process performing the restore has been canceled.	
ANR12 32I Restore of volumes in primary storage pool <i>primary pool name</i> started as process <i>process ID</i> .	ANR12 34I Restore process <i>process ID</i> ended for storage pool <i>storage pool name</i> .	System action If other restore processes are executing for the named storage pool, these processes continue.	
Explanation A process has been started to restore one or more volumes in the indicated primary storage pool.	Explanation A restore process for the named primary storage pool has ended.	User response None.	Explanation Restore processing for the specified storage pool ended with the displayed results.
System action Noncached files that reside on selected volumes in the primary storage pool are restored.	System action None.	ANR12 37I Restore process <i>process ID</i> terminated for volumes in storage pool <i>storage pool name</i> - process canceled.	System action None.
User response None.	ANR12 35I Restore process <i>process ID</i> ended for volumes in storage pool <i>storage pool name</i> .	Explanation During restore of volumes in the indicated primary storage pool, a process performing the restore has been canceled.	User response Examine previous messages to determine whether all restore processes ended successfully.
ANR12 33I Restore preview of volumes in primary storage pool <i>primary pool name</i> started as process <i>process ID</i> .	Explanation A restore process for volumes in the named primary storage pool has ended.	System action If other restore processes are executing for the volumes, these processes continue.	ANR12 39I The restore preview of the <i>primary pool name</i> primary storage pool is complete. Number of files restored: <i>number of restored files.</i> Number of bytes restored: <i>number of restored bytes.</i> Number of deduplicated bytes restored: <i>number of restored dedup bytes.</i>
Explanation A preview process has been started to restore one or more volumes in the indicated primary storage pool.	System action None.	User response None.	
System action Preview information about the restore operation is collected and displayed, but files are not restored. The	User response None.	ANR12 38I The restore of the <i>primary pool name</i> primary storage pool is complete. Number of files restored: <i>number of restored files.</i>	
	ANR12 36I Restore process <i>process ID</i> terminated for storage pool <i>storage pool</i>		

Explanation

Restore preview processing for the specified storage pool ended with the displayed results.

System action

None.

User response

No action is required.

ANR12 40I The restore of volumes in the *primary pool name* primary storage pool is complete. Number of files restored: *number of restored files*. Number of bytes restored: *number of restored bytes*. Number of deduplicated bytes restored: *number of restored dedup bytes*. Number of unreadable files: *number of unreadable files*. Number of unreadable bytes: *number of unreadable bytes*.

Explanation

Restore processing for volumes in the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all restore processes ended successfully.

ANR12 41I The restore preview of volumes in the *primary pool name* primary storage pool is complete. Number of files restored: *number of restored files*. Number of bytes restored: *number of restored bytes*. Number of deduplicated bytes restored: *number of restored dedup bytes*.

Explanation

Restore preview processing for volumes in the specified storage pool ended with the displayed results.

System action

None.

User response

No action is required.

ANR12 42E **Command:** *Process process ID* terminated - storage media inaccessible.

Explanation

During restore processing, a required volume could not be mounted.

System action

The indicated restore process ends.

User response

Verify that the copy and primary storage pools and volumes being accessed are available. Check the ACCESS parameter for both of the storage pools and all related volumes to ensure the ACCESS state is not preventing access.

ANR12 43E **Command:** *Process process ID* terminated - insufficient number of mount points available for removable media.

Explanation

During restore processing, the server could not allocate sufficient mount points for the volumes required.

System action

The indicated restore process ends.

User response

If necessary, make more mount points available.

ANR12 44E **Command:** *Process process ID* terminated - excessive read errors encountered.

Explanation

During restore processing, read errors occur that prevent the restore from continuing.

System action

The indicated restore process ends.

User response

If possible, correct the cause of the read errors and reissue the restore command.

ANR12 45E **Command:** *Process process ID* terminated - excessive write errors encountered.

Explanation

During restore processing, write errors occur that prevent the restore from continuing.

System action

The indicated restore process ends.

User response

If possible, correct the cause of the write errors and reissue the restore command.

ANR12 46E **Command:** *Process process ID* terminated - data transfer interrupted.

Explanation

During restore processing, a data transfer operation was interrupted and could not be continued.

System action

The indicated restore process ends.

User response

If possible, correct the cause of the interruption and reissue the restore command.

ANR12 Command:
47E Process process ID terminated - insufficient space in target primary storage pool.

Explanation

During restore processing, the server cannot copy data to the target primary storage pool, because not enough space is available in the target pool.

System action

The indicated restore process ends.

User response

Make more space available in the target primary storage pool, and then reissue the restore command.

ANR12 Command:
48E Process process ID terminated - sufficient recovery log space is not available.

Explanation

During restore processing, the server runs out of recovery log space.

System action

The indicated restore process ends.

User response

If necessary, make more server recovery log space available.

ANR12 Command:
49E Process process ID terminated - sufficient database space is not available.

Explanation

During restore processing, the server runs out of database space.

System action

The indicated restore process ends.

User response

If necessary, make more server database space available.

ANR12 Command:
50E Process process ID terminated - lock conflict.

Explanation

During restore processing, the server needs to obtain a lock that is not available.

System action

The indicated restore process ends.

User response

Reissue the restore command.

ANR12 Command:
51E Process process ID terminated - thread resource not available.

Explanation

During restore processing, the server cannot start a thread.

System action

The indicated restore process ends.

User response

Reissue the restore command. If the error persists, it may indicate a shortage of server memory.

ANR12 Command:
52E Process process ID terminated - sufficient memory is not available.

Explanation

During restore processing, there is not enough server memory available.

System action

The indicated restore process ends.

User response

If necessary, make more memory available to the server; and then reissue the restore command.

ANR12 Command:
53E Process process ID terminated - internal server error detected.

Explanation

During restore processing, the server encounters an internal error.

System action

The indicated restore process ends.

User response

Contact your service representative.

ANR12 Removable volume volume name is required for restore processing.

Explanation

During processing of a RESTORE STGPPOOL or RESTORE VOLUME command, the server determines that a removable volume is required.

System action

Unless this is a preview process, the server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

ANR12 Files on volume 55W volume name cannot be restored - access mode is "unavailable" or "offsite".

Explanation

During processing of a RESTORE STGPPOOL or RESTORE VOLUME command, files on a copy storage pool volume cannot be restored because of the volume's access mode.

System action

The server continues restore processing, but skips the indicated volume.

User response

If the volume is stored at an offsite location, bring the volume onsite. Use the UPDATE VOLUME command to change the access mode for the volume and restart the restore command.

ANR12 Volume volume 56W *name contains files that could not be restored.*

Explanation

During processing of a RESTORE STGPOOL or RESTORE VOLUME command, the server determines that the indicated volume contains one or more files that could not be restored. If this is a preview operation, this message indicates that a restorable backup copy cannot be found for one or more files on the indicated volume. If this is an actual restore operation, this message could result if any of the following conditions exist for a file on the indicated volume:

- A restorable backup copy cannot be found for the file.
- A restorable backup copy of the file exists, but is located on a copy storage pool volume whose access mode is unavailable or offsite.
- During restore processing, a backup

copy was selected for restore processing, but was deleted or moved before the file was actually restored. This action could occur as a result of MOVE DATA, DELETE VOLUME, AUDIT VOLUME FIX=YES, or reclamation processing of a copy storage pool volume while the restore was in progress.

- A restorable backup copy of the file exists, but is on a copy storage pool volume that cannot be accessed since no drive path exists.

System action

None.

User response

If this was an actual restore operation, check for messages indicating that files could not be restored because a copy storage pool volume was unavailable or offsite. Check to see if a move data, delete volume, audit volume, or reclamation process occurred for a copy storage pool while the restore was in progress. If either of these conditions existed, correct the situation and reissue the restore command.

ANR12 Storage pool 57W *backup skipping damaged file on volume volume name: Node node name, Type file type, File space filespace name, fsId filespace id,*

File name file name.

Explanation

During storage pool backup, a file is encountered that was previously found to be damaged. If this file is part of an aggregate, the entire aggregate was previously marked damaged, possibly because an integrity error was detected for some other file within the aggregate.

System action

The damaged file will not be backed up.

User response

Audit the indicated volume with FIX=YES. The audit will verify whether or not the file is damaged and perform one of the following actions:

- If the the file is found to be undamaged, the audit will reset the file status. If the file is part of an aggregate, the audit will reset the aggregate status if the entire aggregate is found to be undamaged.
- If the file is found to be damaged and the file had not previously been backed up to a copy storage pool, the audit will delete the file.
- If the file is found to be damaged and the file has previously been backed up to a copy storage pool, the audit will report the file as damaged and you

must use the RESTORE STGPOOL command to recover the file.

ANR12 Files on volume 58W *volume name needed for move data cannot be accessed - access mode is "unavailable", "offsite", or "destroyed".*

Explanation

During a move data operation, files on a storage pool volume cannot be copied because of the volume's access mode. The server cannot move data on a volume that has an access mode of "unavailable", "offsite", or "destroyed".

System action

The server continues move data processing, but one or more files were not moved from the volume.

User response

If the specified volume can be made available, use the UPDATE VOLUME command to change the access mode for the volume and reissue the MOVE DATA or MOVE NODEDATA command.

ANR12 Files on volume 59W *volume name needed for offsite reclamation cannot be accessed - access mode is "unavailable" or "offsite".*

Explanation

During reclamation processing of an offsite volume, files on a storage pool volume cannot be copied because of the volume's access mode.

System action

The server continues reclamation, but one or more files were not moved from an offsite volume, which prevents it from being reclaimed.

User response

If the specified volume can be made available, use the UPDATE VOLUME command to change the access mode for the volume and initiate reclamation again by updating the reclamation threshold for the copy storage pool.

ANR12 60W *Volume volume name contains one or more damaged, primary files.*

Explanation

This message is issued during RESTORE STGPOOL processing. The indicated volume contains one or more primary, noncached files that have previously been found to be damaged.

System action

If this is not a preview operation, the restore processing attempts to restore the damaged files from copies located in a copy storage pool. If this is a preview operation, no system action is taken.

User response

You can take the following actions:

- Issue the QUERY CONTENT command with DAMAGED=YES to obtain a list of damaged files on the indicated volume.
- Audit the indicated volume with FIX=NO to verify that the files are damaged; the audit will reset the status of any files that are found to be undamaged during the audit.
- If this message was issued during a restore preview operation, attempt to restore the damaged files using the RESTORE STGPOOL command.
- Audit the indicated volume with FIX=YES to delete the damaged files from the database.

ANR12 63I *command: Processing completed successfully.*

Explanation

The background process to service the command *command* has completed successfully.

System action

Processing for the command completes. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message.

User response

None.

ANR12 64I *Command: Processing canceled before completion.*

Explanation

The background process to service the command *command* has been canceled with the CANCEL PROCESS command.

System action

Processing for the command *command* ends. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message.

User response

None.

ANR12 65E *Salvage volume command: Processing terminated abnormally - error accessing data storage.*

Explanation

The server encountered an internal error in accessing data storage while executing a salvage volume operation.

System action

The operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this

error to determine the cause of the data storage failure. If you find and resolve the error, retry the operation. If you cannot find the error, contact your service representative for assistance in resolving the problem.

ANR12 66E *Salvage volume command: Processing terminated abnormally - volume not a storage pool volume.*

Explanation

The server encountered an internal error in accessing data storage while executing a salvage volume operation. The error occurred because an attempt has been made to access a volume that was not a storage pool volume.

System action

The command *command* operation is ended and server operation continues.

User response

Issue the command with a valid volume name.

ANR12 67I *Salvage volume command: Processed number volume(s).*

Explanation

The background process to service the command *Salvage volume command* inspected *number* input volumes.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 68I *Salvage volume command:*
Recovered
number byte(s).

Explanation

The background process to service the command *Salvage volume command* recovered *number* bytes worth of data.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 69I *Salvage volume command:*
Recovered
number file(s).

Explanation

The background process to service the command *Salvage volume command* recovered *number* files.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 70I *Salvage volume command:* **File (internal file identifier internal file identifier) recovered.**

Explanation

The background process to service the command *Salvage volume command* recovered a file. The new file was given a new, system generated name based on the *internal file identifier* and the name of the volume from which the file was recovered. The *internal file identifier* is the identifier by which the file was known to the server before the file was deleted.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 71I *Salvage volume command:* *** number bytes recovered from volume volume.**

Explanation

The background process to service the command *Salvage volume command* recovered a file from the volume *volume*. The *number* of bytes recovered from the *volume* is listed.

System action

Salvage processing for the command

completes. Server operation continues.

User response

None.

ANR12 72I *Salvage volume command:* *** File is complete - it began and ended on volume volume.**

Explanation

The background process to service the command *Salvage volume command* recovered a file from the volume *volume*. The file was completely contained on *volume*.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 73I *Salvage volume command:* *** File is incomplete - it began on volume volume but did not end.**

Explanation

The background process to service the command *Salvage volume command* recovered a file from the volume *volume*. The file was not completely contained on *volume*. Although the file began on this volume, it spanned out to a different volume.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 74I *Salvage volume command:* *** File is incomplete - it ended on volume volume but did not begin there.**

Explanation

The background process to service the command *Salvage volume command* recovered a file from the volume *volume*. The file was not completely contained on *volume*. Although the file ended on this volume, it spanned in from a different volume.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 75I *Salvage volume command:* *** File is incomplete - it did not begin or end on volume volume.**

Explanation

The background process to service the command *Salvage volume command* recovered a file from the volume *volume*. The file was not completely

contained on *volume*. It spanned in from one volume and spanned out to a another.

System action

Salvage processing for the command completes. Server operation continues.

User response

None.

ANR12 Command: 76E Process terminated - sufficient memory is not available.

Explanation

During salvage processing, not enough server memory is available.

System action

The salvage process ends.

User response

If necessary, make more memory available to the server, and then reissue the salvage command.

ANR12 Command: 77E Process terminated - the default management class in the active policy set in policy domain domain name does not contain an archive copy group. Unable to continue with salvage.

Explanation

The background process to service the command *Salvage volume command* was unable to recover any files because the default management class in the active policy set in *policy domain* does not contain an archive copy group.

System action

The salvage process ends.

User response

Add an archive copy group to the default management class in the active policy set of the specified domain, and then reissue the salvage command.

ANR12 Occupancy is 78I incorrect for storage pool storage pool name. Occupancy is being reset.

Explanation

The server has detected incorrect occupancy information.

System action

The server recalculates the occupancy value based on current storage pool information.

User response

None.

ANR12 Occupancy is 79I incorrect for volume name volume name. Occupancy is being reset.

Explanation

The server has detected incorrect occupancy information.

System action

The server recalculates the occupancy value based on current sequential volume information.

User response

None.

ANR12 Command: 80E Process process ID terminated - transaction aborted.

Explanation

During backup processing, the server detected an error while attempting to commit a transaction. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The indicated backup process ends.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR12 Command: 81E Process process ID terminated - transaction aborted.

Explanation

During restore processing, the server

detected an error while attempting to commit a transaction. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The indicated restore process ends.

User response

Check for additional messages and eliminate the condition that caused the failed transaction.

ANR12 Logical 82I occupancy is incorrect for storage pool storage pool name. Logical occupancy is being reset.

Explanation

The server has detected incorrect logical occupancy information.

System action

The server recalculates the logical occupancy value based on current storage pool information.

User response

None.

ANR12 File count is 83I incorrect for storage pool storage pool name - file count is being reset.

Explanation

The server has detected an incorrect count of the

number of files within this storage pool.

System action

The server will correct this information.

User response

None.

ANR12 Move node data 84I started as process *process ID*.

Explanation

A process has been started to move data by node.

System action

The indicated process has started.

User response

To query the progress of the process, use the QUERY PROCESS command. To cancel the background process, use the CANCEL PROCESS command. Use the *process ID* number to specify this process.

ANR12 Move node data 88I process *process ID* ended for storage pool *storage pool name*.

Explanation

A move node data process for the named storage pool has ended.

System action

None.

User response

None.

ANR12 Move node data 89I process *process ID* terminated for the storage pool *storage pool name* - process canceled.

Explanation

During move node data processing in the indicated storage pool, the process performing the move node data has been canceled.

System action

If other move node data processes are executing for the storage pool, these processes continue.

User response

None.

ANR12 The process of 90I moving node data from the *storage pool name* storage pool to the *storage pool name* storage pool is complete. Number of files moved: *number of moved files*. Number of bytes moved: *number of moved bytes*. Number of deduplicated bytes moved: *number of moved dedup bytes*. Number of unreadable files: *number of unreadable files*. Number of

unreadable bytes: *number of unreadable bytes*.

Explanation

The process of moving node data for the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all of the move node data processes ended successfully.

ANR12 Space-reclamation 93E process *process number*: Fifty files in offsite storage-pool volumes do not have copies in accessible storage pools.

Explanation

More files in offsite storage-pool volumes might exist for which copies cannot be located. If this is the case, message ANR1173E is not displayed.

System action

The IBM Storage Protect server skips files that do not have copies. The server does not move the files from offsite storage-pool volumes.

User response

To view detailed information about all the files that are skipped during the space-reclamation process, enable trace AFUNAVAILABLE and look in the trace log.

ANR12 Process process 94I *ID* skipped skipped files on volume *volume name* because of deduplicated files.

Explanation

While moving or copying files from the sequential FILE volume shown to a DISK storage pool, files that had deduplicated extents were encountered. As a result, the files were skipped.

The sequential FILE volume shown is assigned to a storage pool that has deduplication enabled or at one time had deduplication enabled. Some of the files on the volume have deduplicated extents and can not be moved or copied to the DISK storage pool.

System action

The server moves or copies all files from the volume that do not have deduplicated extents. Those files that do have deduplicated extents are skipped.

User response

If attempting a MOVE DATA/NODEDATA to

move the files with deduplicated extents to the DISK storage pool, one must first perform a MOVE DATA/NODEDATA to another sequential storage pool that does not have deduplication enabled. This move will restore the deduplicated files to their complete state in the target storage pool. Once all deduplicated data has been moved, perform a MOVE DATA or MOVE NODEDATA to the DISK storage pool from the target storage pool. It is recommended to use a FILE storage pool as the target.

If attempting a RESTORE STGPOOL/VOLUME to copy the files with deduplicated extents, one must first perform a RESTORE STGPOOL/VOLUME to another sequential storage pool that does not have deduplication enabled. This will restore the deduplicated files to their complete state in the target storage pool. Once all deduplicated data has been restored, perform a MOVE DATA/NODEDATA to the DISK storage pool from the target storage pool. It is recommended to use a FILE storage pool as the target.

ANR12 An attempt to set end reclamation date for WORM volume volume name to end reclamation date failed. end reclamation date set to SnapLock retention date.

Explanation

IBM Storage Protect computes and attempts to set the end reclamation date for a volume based on the RETMIN and RETVER COPYGROUP attributes. When setting the end reclamation date for the named volume, the Network Appliance SnapLock file system was unable to fulfil the request. It was, however, able to set the date to the Snaplock retention date, which is farther in the future than the requested date. This is probably due to how the SnapLock NAS file server's retention date is configured.

This warning message is only issued once per volume, when this condition is detected when data is first placed on the volume.

System action

The operation continues.

User response

Verify that the IBM Storage Protect COPYGROUP attributes and the retention settings of the Network Appliance file system are consistent with your requirements for WORM volume storage.

ANR12 Storage pool 96W storage pool name does not contain WORM FILE volumes.

Explanation

This message might be issued during the definition or updating of

a storage pool, or during BACKUP or RESTORE STGPOOL commands, or in other such situations when it is determined that data on WORM volumes might be moved to other media. It names a storage pool that does not contain WORM FILE volumes.

When it is issued during the DEFINE and UPDATE STGPOOL commands, it indicates that the storage pool being defined or updated is being configured with WORM FILE volumes (Reclamationtype is SnapLock), but other storage pools being specified on the storage pool definition (for example, the Next or Reclaim or Copy storage pool parameters) do not contain WORM FILE volumes (Reclamationtype is Threshold). Such configurations might cause data on those WORM FILE volumes to be moved to a storage pool that does not support WORM FILE volumes.

For other situations, this message might be issued when there will be a movement of data from a storage pool with WORM FILE volumes (Reclamationtype is SnapLock) to a storage pool that does not have WORM FILE volumes (Reclamationtype is Threshold).

The server allows this type of movement, but the customer needs to be aware that if data is moved from a WORM FILE volume

to another type of media, the data may no longer be protected from inadvertent or malicious deletion. In addition, if this data is on WORM volumes to meet data retention and protection requirements for certain legal purposes and is moved to other media, the data might no longer meet those requirements.

System action

The command continues.

User response

Verify that the storage pools being used meet your requirements for data protection and retention.

ANR12 Storage pools 97E with RECLAMATIONTYPE=SNAPLOCK can only be defined on servers with archive data retention protection enabled.

Explanation

Defining storage pools with RECLAMATION=SNAPLOCK is only supported on a server with archive data protection enabled.

System action

The define storage pool command fails.

User response

Define the storage pool with RECLAMATIONTYPE=THRESHOLD on this server. Or

else enable archive data retention protection on this server, and try the command again.

ANR12 The server 98W encountered an error in attempting to delete an object in a Centera storage device. The Centera representation of the name is Centera object string. The server was keeping track of the object in volume id volume id. The return code received was return code.

Explanation

The server failed to delete an object in a Centera storage device after server records concerning the object were deleted. The object is no longer accessible through the server. The object continues to occupy space in the Centera storage device. The return code that is returned is either from the server interface to Centera services, or it can be directly from the Centera device.

System action

The server continues operation, and the object is logically deleted within the server, but continues to occupy space in the Centera device.

User response

The server can continue to operate in spite of this error. Centera service can be required if the volume of unpurged objects becomes a problem.

ANR12 The server 99E encountered an invalid storage format while attempting a partial object retrieve for object seg_id.

Explanation

A partial object retrieve was attempted on a file that was stored in a format that does not support partial object retrieves.

System action

The transaction ends and the retrieve request fails.

User response

Try the retrieve again, using a regular or full retrieve instead of a partial object retrieve.

ANR13 Command: Data 01E in storage pool storage pool name may not be moved into a retention pool.

Explanation

The command indicated that data in the specified non-retention pool be moved into a target retention pool. Data movement into retention storage pools is limited to movement from the same retention storage pool or from other retention storage pools.

System action

The server does not process the command.

User response

Reissue the command with an appropriate target storage pool.

ANR13 The storage rule 02E name storage rule has a destination storage pool whose access type is not readwrite.

Explanation

During Retention copy processing, the indicated storage rule had a target stgpool which disallows writing.

System action

Retention copy processing for this stgule ends.

User response

The access state for the target storage pool for this operation is not set to READWRITE. Check the storage rule for the Target Storage Pool Name and check that the access state for the storage pool is set to ACCESS=READWRITE. One way to check is to use QUERY STGPOOL stgpoolname Format=Detail.

ANR13 Command: Data 03E in retention storage pool storage pool name is restricted to movement in the same pool.

Explanation

The command indicated specifies the use of a different target pool than the source target pool. Data movement for retention storage pools is limited to movement within the same storage pool.

System action

The server does not process the command.

User response

Reissue the command without a target storage pool.

ANR13 Command: 04E Retention storage pool storage pool name may not be specified with SHREDTONOSH RED=YES

Explanation

The command indicated specifies the use of a keyword which is not applicable to retention storage pools.

System action

The server does not process the command.

User response

Reissue the command without the SHREDTONOSHRED keyword.

ANR13 Disk volume 05I volume name varied online.

Explanation

The specified volume has been varied online as the result of a VARY ONLINE command.

System action

None.

User response

None.

ANR13 Disk volume 06I *volume name varied online (read-only).*

Explanation

The specified volume has been varied online in read-only mode as the result of a VARY ONLINE command.

System action

None.

User response

None.

ANR13 Disk volume 07I *volume name varied offline.*

Explanation

The specified volume has been varied offline as the result of a VARY OFFLINE command.

System action

None.

User response

None.

ANR13 Incorrect bytes 08W *read bytes read for offset offset.*

Explanation

The read operation fails. Check previous messages in the activity log for a message that shows an I/O error or warnings.

System action

None.

User response

None.

ANR13 Shred value 09W *zero for storage pool storage pool name may render deleted data non shreddable.*

Explanation

This message is issued during the define or update of a storage pool when a SHRED value of zero has been found with a storage pool in the storage pool hierachy.

The server allows this type of operation, but the administrator needs to be aware that if data is stored or moved to the affected storage pool, the data cannot be shredded after deletion.

When it is issued during the DEFINE command, it indicates that the storage pool definition is being configured with a non zero SHRED value, however other storage pools being specified on the definition (for example, the Next or Reclaim or Copy storage pool parameters) have a SHRED value of zero.

When issued during the UPDATE command, it indicates the specified

storage pool may be altering the SHRED value from non zero to zero or that the specified Copy, Next or Reclaim storage pool has a SHRED value zero. Such configurations may result in data to become non shreddable if data from the primary random access storage pool is moved to one of the storage pools with a zero SHRED value.

System action

The command continues.

User response

Verify that the storage pools being used meet your requirements for data protection.

ANR13 Vary-on failed 10E *for disk volume volume name - insufficient memory.*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but sufficient memory is not available to process the command.

System action

The volume is not varied online.

User response

Reissue the command at a later time, or make more memory available to the server.

ANR13 Vary-on failed 11E *for disk volume volume name - unable to*

access disk device.

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the server is unable to access the disk.

System action

The volume is not varied online.

User response

Attempt to determine the cause of the inability to access the volume and correct the problem.

ANR13 Vary-on failed 12E *for disk volume volume name - error reading disk.*

Explanation

A VARY ONLINE command has been issued for the disk volume specified but the server encounters an error reading the disk.

System action

The volume is not varied online.

User response

Attempt to determine the cause of the read error and correct the problem.

ANR13 Vary-on failed 13E *for disk volume volume name - unsupported block size (block size).*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the volume is formatted with a block size that cannot be used.

System action

The volume is not varied online.

User response

Reformat the disk with a block size that is an evenly divisible by 4096.

ANR13 Vary-on failed 14E *Vary-on failed for disk volume volume name - reduced capacity (was count blocks, now count blocks).*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the size of the volume does not match the size expected.

System action

The volume is not varied online.

User response

Restore the volume or otherwise correct the disk volume size, and reissue the command.

ANR13 Vary-on failed 15E *Vary-on failed for disk volume volume name - invalid label block.*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the label block of the volume is invalid or cannot be read.

System action

The volume is not varied online.

User response

Restore or reformat the disk volume.

ANR13 Vary-on failed 16E *Vary-on failed for disk volume volume name - internal error detected.*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but fails due to an internal server error.

System action

The volume is not varied online.

User response

Contact your service representative.

ANR13 Command: 17E *Storage pool storage pool name is not a shreddable pool.*

Explanation

The command indicated specifies the name of a storage pool which is not a shreddable pool. The command

syntax requires that SHREDTONOSHRED=YES be specified when data is moved from a shreddable storage pool to a non shreddable storage pool.

System action

The server does not process the command.

User response

Reissue the command with SHREDTONOSHRED=YES.

ANR13 The process of 18I *copying active data from the primary pool name primary storage pool to the active data pool name active data pool is complete. Number of copied files: number of copied files. Number of copied bytes: number of copied bytes. Number of copied deduplicated bytes: number of copied dedup bytes. Number of unreadable files: number of unreadable files. Number of unreadable bytes: number of unreadable bytes.*

Explanation

The process of copying active data for the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all copy active data processes ended successfully.

ANR13 The preview of 19I *copying active data from the primary pool name primary storage pool to the active data pool name active data pool is complete. Number of files copied: number of copied files. Number of copied bytes: number of copied bytes. Number of copied deduplicated bytes: number of copied dedup bytes.*

Explanation

The preview of copy active data processing for the specified storage pool ended with the displayed results.

System action

None.

User response

No action is required.

ANR13 Vary-on not 20W *Vary-on not possible for disk volume volume name - access state is "unavailable".*

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the status of the volume is unavailable.

System action

The volume is not varied online.

User response

If necessary, use the UPDATE VOLUME command to change the status of the volume, and reissue the command.

ANR13 Vary-on not possible for disk volume *volume name* - access state is "destroyed".

Explanation

A VARY ONLINE command has been issued for the disk volume specified, but the status of the volume is destroyed.

System action

The volume is not varied online.

User response

If necessary, use the UPDATE VOLUME command to change the status of the volume, and reissue the command.

ANR13 The shredding mode is already shredding mode.

Explanation

A SETOPT SHREDDING command was issued to

change the shredding mode, but the new mode is the same as the existing mode.

System action

The shredding mode is unchanged.

User response

None.

ANR13 Command 23E SHRED DATA is invalid for automatic shredding mode.

Explanation

A SHRED DATA command was issued while shredding mode is set to Automatic.

System action

The command is ignored.

User response

Set the shredding mode to Manual or wait for automatic shredding to shred the data.

ANR13 Process process number 24E is already running a SHRED DATA.

Explanation

A SHRED DATA command was issued while another SHRED DATA process is still executing. Only a single SHRED DATA process is allowed at any time.

System action

The command is ignored.

User response

Wait for the current SHRED DATA process to finish, and issue the command again.

ANR13 Shreddable object for node 25W *name*: type=*type*, file space=*filespace name*, object=*object name* skipped.

Explanation

The object for *node name*, identified by *type*, *file space* and *object name* was found in a shreddable storage pool and is skipped, however the EXPORT continues.

System action

The server process continues exporting and will skip all shreddable objects.

User response

Specify the ALLOWSHREDDABLE=YES parameter when exporting objects from a shreddable storage pool. Using this option forces EXPORT to process all objects, including objects found in shreddable storage pools.

ANR13 Shredding process 26I complete after shredding *shredded bytes* bytes and skipping *skipped bytes* bytes.

Explanation

The shredding process has completed. The amount of data successfully shredded and the amount of data that was skipped are reported.

System action

Server operation continues. If any data was skipped, the server will attempt to shred it the next time shredding runs.

User response

None.

ANR13 Automatic shredding stopped. Total bytes shredded was *shredded bytes* and total bytes skipped was *skipped bytes* bytes.

Explanation

The automatic shredding process has ended. The amount of data successfully shredded and skipped during automatic shredding is reported.

System action

Server operation continues. If any data was skipped, the server will attempt to shred it the next time shredding runs.

User response

None.

ANR13 The server has 28E detected an attempt to

restore or retrieve a shredded object.

Explanation

An attempt was made to retrieve or restore an object which has already been shredded. This can happen if your database was recently restored, and data which existed at the time of the database backup has since been erased and shredded.

System action

Server operation continues.

User response

Perform an AUDIT VOLUME operation on the volume containing the shredded data.

ANR13 29I Automatic shredding started.

Explanation

The automatic shredding of deleted objects is starting.

System action

Server operation continues.

User response

None.

ANR13 30E The server has detected possible corruption in an object that is being restored or moved. The actual values for the incorrect frame are:

**magic *magic* hdr
version *ver* hdr
length *hdrLen*
sequence
number *seqNum*
data length
length server ID
srvId segment
ID *segId* crc *crc*.**

Explanation

An invalid frame was detected. This might indicate corruption within the object that is being restored or moved.

System action

The object is not restored or moved.

User response

Retry the failing operation. If the operation fails again, review additional information that is available for this message: Search for "ANR1330E" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR13 31E Invalid frame detected. Expected magic sequence number *seqNum* server id *srvId* segment id *segId*.

Explanation

This message indicates the expected values when an invalid frame is detected.

System action

None.

User response

If contacting support, please provide the information from this message.

ANR13 32W Shredding cancelled prior to completion. Total bytes shredded was *shredded bytes* and total bytes skipped was *skipped bytes* bytes.

Explanation

The shredding process was cancelled either because the specified duration has elapsed, or because the CANCEL PROCESS command was used to cancel it. The amount of data successfully shredded and skipped is reported.

System action

Server operation continues. If any data was skipped or not processed, the server will attempt to shred it the next time shredding runs.

User response

None.

ANR13 35E command: Database *database name* cannot be the target of an upgrade because it is not empty.

Explanation

The DSMSERV INSERTDB operation cannot insert data into the specified database because

the database already contains data from another server.

Possible causes for this error include:

- The wrong database was specified in the DATABASEALIAS option in the server's options file.
- The database was formatted using the DSMSERV FORMAT command instead of the DSMSERV LOADFORMAT command.

System action

The DSMSERV INSERTDB command terminates.

User response

Verify that the correct database name is specified in the server's options file. If the correct database is specified, and the database is not in use by a different IBM Storage Protect server, then drop the database and recreate it using the DSMSERV LOADFORMAT command before rerunning the DSMSERV INSERTDB command.

ANR13 36I command: Ready for connections from the source server. Remaining time: *remaining time*

Explanation

The command has completed its initialization, and is ready to begin receiving database information from the source server.

System action

The command will continue to wait until the source server establishes a server-to-server connection and begins sending database information, or until the specified amount of time has passed.

User response

Initiate a session from the source server.

ANR13 A trigger type 37I trigger has been removed.

Explanation

The DSMSERV INSERTDB command encountered a database backup trigger, a database space trigger, or recovery log space trigger, and removed it as part of the database upgrade process.

System action

The trigger is deleted from the upgraded database.

User response

None.

ANR13 One or more 38E constraint violations were detected. Examine log file log file name for details.

Explanation

The DSMSERV INSERTDB command encountered one or more instances where data being inserted into the database violated a constraint or was otherwise invalid.

Information about the error, along with the data that caused the error, was logged in the specified log file.

System action

The offending row was not inserted into the database. Instead, the contents of the row were written to the specified log file along with additional information about the specific error.

User response

Because some data was not inserted into the database, the database is in an inconsistent state. The server should not be started until the problem is corrected.

Contact your service representative for assistance in correcting the problem. You may be directed to examine the log file, and in some cases, correct the erroneous data and insert it into the database. However, due to the sensitive nature of the database, you should never attempt to do this unless directed to do so by your service representative.

ANR13 Session session 39W id underestimated a size allocation request - additional spaceMB more space was allocated to allow the operation to continue.

Explanation

This session required *additional space* megabytes of space in order for the operation to continue. The client is responsible for accurately reporting the size of a file to be stored to the server. The size reported by the client is used to reserve space in the DISK storage pool to store this file. If this size is underestimated, the server may not be able to allocate the additional space needed for this file to continue with this operation.

System action

None, the operation was able to continue.

User response

The installed version of the client for this node should be evaluated. In most cases, if a client has underestimated the sizes of files reported to the server, this may have been corrected in a newer version of the client. If this is an application using the IBM Storage Protect API that is not an IBM product, contact the vendor for the application to have this corrected.

ANR13 Scratch volume 40I volume name is now defined in storage pool storage pool name.

Explanation

The scratch volume specified has been added to the storage pool shown.

System action

None.

User response

None.

ANR13 Scratch volume 41I volume name has been deleted from storage pool storage pool name.

Explanation

The scratch volume specified is no longer in use and has been removed from the indicated storage pool.

System action

None.

User response

None.

ANR13 Scratch volume 42I volume name is now pending - volume will be deleted from storage pool storage pool name after the reuse delay period for this storage pool has elapsed.

Explanation

All files have been deleted from the indicated scratch volume. The volume will not be removed from the storage pool until the reuse delay time period for the indicated storage pool has elapsed. If the storage pool does not have a reuse tdelay specified, the indicated

volume was emptied after it had been requested by another process. It will be in the full or filling state if the process places more data on the tape, or it will be removed from the storage pool after it is no longer required.

System action

None.

User response

None.

ANR13 Unable to delete 43I scratch volume volume name.

Explanation

A scratch volume cannot be deleted from the server and returned to scratch at this time because all the locks have not been released. A number of retries have been attempted.

System action

None

User response

The scratch volume will be automatically deleted when the server is restarted. Or, you may manually delete this volume later, using the DELETE VOLUME command.

ANR13 Volume volume 44I name cannot be reused. Remove the volume from server storage.

Explanation

A volume that was full and is now empty cannot be reused by the server

because the volume is on WORM media.

System action

The volume is in a state where the access mode is READONLY, the status is FULL, and the percent utilized is 0. The server considers the volume to be empty when calculating the occupancy and utilization fields for the volume.

User response

The volume remains in the library and in the storage pool, with the attributes described in the System Action section. If this is not a volume in a RECLAMATIONTYPE=SNA PLOCK storage pool, you may remove the volume by performing these steps:

1. Remove the volume from the storage pool by issuing the DELETE VOLUME command.
2. Remove the volume from the library by issuing the CHECKOUT LIBVOLUME command.

If this is a volume in a RECLAMATIONTYPE=SNA PLOCK storage pool, you cannot remove the volume. Rather, allow IBM Storage Protect reclamation processing to delete the volume.

ANR13 Volume volume 45I name cannot be reused by other applications and will remain in the storage pool.

Explanation

A WORM (write-once-read-many) volume that has been written by the server cannot be used by other applications. This volume was not full and has been emptied due to expiration, delete commands, or transaction failure.

System action

The volume remains in the storage pool to be reused by IBM Storage Protect, unless it is manually deleted. The remaining space on the volume will be used in the normal course of server operation.

User response

If the volume is no longer to be used, manually delete it from the storage pool.

ANR13 Export/import 46E command: Preview processing terminated abnormally - error accessing data storage.

Explanation

The server encountered an internal error in accessing data storage while executing an import or export preview operation.

System action

The export or import operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If you find and resolve the error, retry the export or import operation. If you cannot find the error, contact your service representative for assistance in resolving the problem.

ANR13 Export/import 47E command: Processing terminated abnormally - error accessing data storage.

Explanation

The server encountered an internal error in accessing data storage while executing an import or export operation.

System action

The export or import operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If you find and resolve the error, retry the export or import operation. If you cannot find the error, contact your service representative for assistance in resolving the problem.

ANR13 Export 48I Operation

**information for
number objects
has been
deleted.**

Explanation

A background server process deleted export operation information for *number* files from the server database. This process started during initialization to remove any unneeded export information.

System action

The actual backup or archive objects were not deleted. Only information used to sort these objects during the previous export operation was deleted.

User response

None.

**ANR13 Error code
49E during deletion
of export
operation
information for
number objects.**

Explanation

A background server process encountered an internal error after deleting export operation information for *number* files from the server database. This process started during initialization to remove any sorting information which is left over from previous export operations.

System action

The backup or archive objects were not deleted.

Only the information used to sort these objects during the previous export operation was deleted. The background process was terminated before all sorting information was deleted. The system will not perform further export processing of file data until this problem is resolved.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages, then restart the server. If the error cannot be isolated and resolved, contact your service representative.

**ANR13 Command:
50E Invalid time
range specified.
FROM: fromdate
fromtime TO:
todate totime.**

Explanation

A command was issued that specifies an invalid FROM and TO date or time range. This error can occur when the FROM date or time is not before the TO date or time.

System action

The server does not process the command.

User response

Reissue the command with a valid date or time range.

**ANR13 Export/import
51I command:
Processing
suspended with
status status.**

Explanation

The background process to service the command *command* was suspended with a SUSPEND command.

System action

Processing for the command *command* stops. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message.

User response

None.

**ANR13 Command
52I started by
administrator
name as process
process ID has
been
suspended.**

Explanation

The background process to service the command *command* by administrator *administrator name* suspended processing.

System action

The specified process suspends, and server operations continue.

User response

None.

**ANR13 Command:
53I Cannot cancel
the EXPORT
operation with
export identifier
exportId. The
operation is
currently active.**

Explanation

The server cannot cancel the export operation specified in the CANCEL EXPORT command because it is currently running as an active process.

System action

Server operations continue.

User response

Only suspended EXPORT operations may be cancelled by issuing the CANCEL EXPORT command. Issue the QUERY EXPORT command to identify the current state of the EXPORT operation.

**ANR13 command name:
54I The
EXPORTIdentifi
er parameter is
not supported
when the
FILEDATA
parameter is set
to NONE.
Running as non-
restartable
export.**

Explanation

The EXPORTIdentifier parameter is ignored while the command continues.

System action

The command runs and server operations continue.

User response

None.

ANR13 command name:
55I An export operation already exists with the EXPORTIDentifier export ID.

Explanation

The export command fails.

System action

The command fails and server operations continue.

User response

Reenter the export command with an unused export identifier.

ANR13 Command:
56I Cannot restart the EXPORT operation with export identifier *exportId*. The operation is currently active.

Explanation

The server cannot restart the export operation specified in the RESTART EXPORT command because the export operation is currently running as an active process.

System action

Server operations continue.

User response

Only suspended Export operations may be restarted using RESTART EXPORT command. Issue the QUERY EXPORT command to identify the current state the EXPORT operation.

ANR13 command name:
57I The EXPORTIDentifier parameter is not supported when the PREVIEWIMPORT parameter is specified. Running as non-restartable export.

Explanation

The EXPORTIDentifier parameter is ignored while the command continues.

System action

The command runs and server operations continue.

User response

None.

ANR13 Export
58I Identifier: *Export Id*

Explanation

This is a restartable export operation that can be referenced by the displayed EXPORTIDentifier parameter.

System action

Server operations continue

User response

None.

ANR13 Suspend in
59I progress

Explanation

The server-to-server export operation has been suspended and will stop when resources have been freed for the background process. This message may be displayed in response to a QUERY PROCESS command for an export operation.

System action

Server operation continues.

User response

None.

ANR13 Output volume
60I *volume name* opened (sequence number *sequence number*).

Explanation

During a sequential data operation, the volume specified has been opened for output as the volume number shown.

System action

None.

User response

None.

ANR13 Output volume
61I *volume name* closed.

Explanation

During a sequential data operation, the volume specified has been closed because the export or dump is complete.

System action

None.

User response

None.

ANR13 Output volume
62I *volume name* closed (full).

Explanation

During a sequential data operation, the volume specified has been closed because the volume is full.

System action

None.

User response

None.

ANR13 Input volume
63I *volume name* opened (sequence number *sequence number*).

Explanation

Because of a sequential data operation, the volume specified has been opened for input as the volume number shown.

System action

None.

User response

None.

**ANR13 Input volume
64I** *volume name
closed.*

Explanation

During a sequential data operation, the volume specified has been closed because the operation is complete.

System action

None.

User response

None.

**ANR13 Volume volume
65I** *name closed
(end reached).*

Explanation

During a sequential data operation, the volume specified has been closed because processing of the volume is complete.

System action

None.

User response

None.

**ANR13 Input volume
66W** *volume name
contains an
invalid
identifier.*

Explanation

During a sequential data operation, the volume specified has been mounted but contains an invalid identifier.

System action

The volume is not used.

User response

Make sure you specified the correct volume for the operation. If a RESTORE DB operation was in process, ensure that the database backup operation was completed on the same type of operating system and processor architecture. You can restore a database only to the same type of operating system and processor architecture that was backed up. If a LOADDB operation was being performed on MVS, the command syntax may be specified by using a ddname or by specifying a device class name. You must use the same method that was used when the database was originally dumped. If you did not, this error message will be displayed. Try loading the data base by using the other method of syntax (ddname).

**ANR13 Import volume
67W** *volume name
was written by a
different export
process.*

Explanation

During an IMPORT operation, the volume specified has been mounted but contains an export identifier that does not match the import process.

System action

The volume is not used.

User response

Supply a volume created by the proper export process.

**ANR13 Input volume
68W** *volume name
contains
sequence
number
sequence
number; volume
sequence
number
sequence
number is
required.*

Explanation

During a sequential data operation, the volume specified has been mounted but contains the wrong volume sequence number.

System action

The volume is not used.

User response

Supply the volume with the proper sequence number. The volume history file can help you choose the correct volume.

**ANR13 Input volume
69E** *volume name
contains Version
1 dump.*

Explanation

During a sequential data operation, the volume specified has been mounted but appears to contain a version 1 database dump.

System action

The volume is not used. The operation is terminated.

User response

Make sure you specified the correct volume for the operation. A Version 1 database dump may not be loaded into a Version 2 server. The Version 1 database dump must only be loaded into a Version 1 server.

**ANR13 Insufficient
70E** *number of
mount points
available in
device class
device class
name.*

Explanation

During IMPORT or EXPORT processing, the server cannot allocate sufficient mount points for the device class specified. The device class associated with the EXPORT or IMPORT drive only has a mount limit of one. The operation needs to read or write file data from or to the same device class because file data is being imported or exported.

System action

The IMPORT or EXPORT command is ended and server operation continues.

User response

Make more mount points available.

**ANR13 Command: The
71I** *export
operation with*

**export identifier
Export Id has
been deleted.**

Explanation

The suspended server-to-server export operation has been deleted. This operation may no longer be restarted. This message is displayed in response to a CANCEL EXPORT command.

System action

Server operation continues.

User response

None.

**ANR13 Suspend export
72I request
accepted for
export process
with export
Identifier Export
Id (process
process ID).**

Explanation

A SUSPEND EXPORT command has been entered for the specified server-to-server export process. Some processes will experience a delay before they suspend. This delay may be lengthy for processes that involve remote data movement.

System action

None.

User response

None.

**ANR13 Process process
73I Id for Command
has been
suspended on
source server.**

Explanation

The background import process has been suspended on the source server.

System action

The specified process ends, and server operation continues.

User response

None.

**ANR13 Process process
74I Id for Command
has been
canceled on
source server.**

Explanation

The background import process has been canceled on the source server.

System action

The specified process ends, and server operation continues.

User response

None.

**ANR13 Command:
75I Cannot suspend
the export
operation export
Id because the
current state is
not valid.**

Explanation

This message is returned in response to a SUSPEND EXPORT command which specified an export operation that is not currently suspendible. The export operation may not be running, or it may be

in the process of being suspended.

System action

The specified command fails, and server operation continues.

User response

None.

**ANR13 Analyst
76I authority has
been revoked
for
administrator
administrator
name.**

Explanation

The DSMSEV INSERTDB command encountered an administrator with analyst authority, and revoked the authority as part of the database upgrade process.

System action

The analyst authority is revoked.

User response

None.

**ANR13 Analyst
77I authority has
been revoked
for
administrator id
administrator id.**

Explanation

The DSMSEV INSERTDB command encountered an administrator with analyst authority, and revoked the authority as part of the database upgrade process.

System action

The analyst authority is revoked.

User response

None.

**ANR13 command: No
78I connection was
received after
session wait
time minutes.**

Explanation

The command waited the specified amount of time for the source server to connect, but no connection was established.

System action

The command terminates.

User response

Rerun the command. Either specify a larger value for the SESSWAIT parameter, or establish a connection from the source server more quickly.

**ANR13 command: Read
79I bytes bytes and
inserted
database entries
database
entries in
elapsed time
(read rate
megabytes per
hour).**

Explanation

The command read the indicated number of bytes, and wrote the indicated number of database entries.

System action

None.

User response

None.

**ANR13 The buffer pool
80I monitor switch
is enabled.**

Explanation

The server has turned the buffer pool monitor switch to 'ON'.

System action

Server continues processing.

User response

No action is required.

**ANR13 The buffer pool
81W monitor switch
is disabled
'OFF'. A manual
update might be
needed.**

Explanation

The server failed to turn the buffer pool monitor switch to 'ON'.

System action

Server continues processing.

User response

No action is required at this time. But a manual update might be needed before executing command 'Q DBS' or 'Q DB F=D'. Refer to message 1139I.

**ANR13 The server
82E failed with error
code return code
when**

attempting to
update a
database
parameter.

Explanation

Cannot update a database parameter with the value specified in the server options file.

System action

The server initialization fails.

User response

Examine the server messages issued prior to this message to determine the source of the error. Contact your service representative for further

**ANR13 Memory usage
83I by the database
manager is
limited to
instance
memory in
MBMB.**

Explanation

The memory dedicated to the database manager was set successfully.

System action

Server continues processing.

User response

None.

**ANR13 The update to
84E set memory
used by IBM
Storage Protect
server database
to instance
memory in
MBMB failed.**

Explanation

Attempt to set memory dedicated to IBM Storage Protect server database failed.

System action

Server operation continues.

User response

Collect all messages prior to this one and contact your service representative for further assistance.

**ANR13 The database
85E name is either
invalid or
missing in the
server option
file.**

Explanation

While attempting to format a database, the IBM Storage Protect server has found that the database name is either invalid or missing.

System action

Server format stops.

User response

Before reissuing the command to format the database, check the following items:

- Ensure that the server options file has a valid name for for IBM Storage Protect server database. The database name is specified with the DATABASEALIAS option. The database name is a unique character string containing from one to eight letters, numbers,

or keyboard characters. The name can contain any of the following characters: a-z, A-Z, 0-9, @, #, and \$.

- Ensure that the command is using the correct options file for the server. If you are using the -o option with the command to specify a server options file, ensure that the name and location of the file is correct.

**ANR13 Beginning
86I schema
verification for
the database
insert process.**

Explanation

The database insert process is verifying that the database schema is correct.

System action

The server will verify the correctness of the database schema before inserting any database records.

User response

None.

**ANR13 Schema
87I verification for
the database
insert process
has completed.**

Explanation

The database insert process has successfully verified that the database schema is correct.

System action

If CHECKSCHEMA=YES was specified then the

database insert process will begin inserting records into the database.

User response

None.

ANR13 Schema 88E verification for the database insert process detected inconsistencies.

Explanation

Inconsistencies were detected during database schema verification.

System action

The database insert process terminates.

User response

Contact your service representative.

ANR13 The database 89I insert process is terminating because CHECKSCHEMA=ONLY was specified.

Explanation

The database insert process is terminating after verifying the database schema because the CHECKSCHEMA=ONLY parameter was specified.

System action

The database insert process terminates.

User response

Rerun the command without specifying the

CHECKSCHEMA=ONLY parameter.

ANR13 Column source 90E column name (source column number) in legacy table source table name is mapped to an invalid column (target column number) in target table target table name (maximum column is table size).

Explanation

The database insert process has detected a discrepancy while verifying the data base schema. A column in the source database table was mapped to an invalid column in the target table. The target column number is higher than the number of columns in the target table.

System action

The database insert process terminates.

User response

Contact your service representative.

ANR13 Column source 91E column name (source column number) in legacy table source table name is mapped to the wrong column target column name (target column number) in target table

target table name.

Explanation

The database insert process has detected a discrepancy while verifying the data base schema. A column in the source database table was mapped to the wrong column in the target table.

System action

The database insert process terminates.

User response

Contact your service representative.

ANR13 Column target 92E column name (target column number) in target table target table name is not set by upgrade, but does not allow NULLs and has no default value.

Explanation

The database insert process has detected a discrepancy while verifying the data base schema. A column in the target database table is not set, does not have a default value and does not allow NULLs.

System action

The database insert process terminates.

User response

Contact your service representative.

ANR13 Memory usage 93I by the database manager is set to AUTOMATIC.

Explanation

The memory dedicated to IBM Storage Protect server database was set to automatic successfully.

System action

Server continues processing.

User response

None.

ANR13 The update to 94E set memory used by IBM Storage Protect server database to AUTOMATIC failed.

Explanation

Attempt to set memory dedicated to IBM Storage Protect server database to automatic failed.

System action

Server operation continues.

User response

Collect all messages prior to this one and contact your service representative for further assistance.

ANR13 Insertdb 95I command: Process process number,

database insert, has completed.

Explanation

The database insert process *process number* has completed.

System action

Database insert processing ends.

User response

None.

ANR13 Insertdb 96E *command: Process process number, database insert, has completed with errors.*

Explanation

The database insert process *process number* has completed, but errors were encountered by the process.

System action

Database insert processing ends.

User response

Review any messages that were issued by the process, and take corrective action as appropriate.

ANR13 Insertdb 97I *command: Found number of database objects database objects.*

Explanation

This message indicates the total number

of database objects that were found during database insert processing.

System action

Server processing continues.

User response

None.

ANR13 Insertdb 98I *command: Processed number of database objects database objects.*

Explanation

This message indicates the total number of database objects that were successfully processed during database insert processing.

System action

Server processing continues.

User response

None.

ANR13 Insertdb 99I *command: Failed to process number of database objects database objects.*

Explanation

This message indicates the total number of database objects that were not successfully processed

during database insert processing.

System action

Server processing continues.

User response

None.

ANR14 Mount request 00W *Mount request denied for volume volume name - mount canceled.*

Explanation

The volume shown cannot be mounted because the mount request has been canceled.

System action

The volume is not mounted.

User response

None.

ANR14 Mount request 01W *Mount request denied for volume volume name - mount failed.*

Explanation

The volume shown cannot be mounted because the mount request cannot be completed successfully. Possible reasons include, an error in device specifications to the server or the mount request timed out.

System action

The volume is not mounted.

User response

If the device specifications (DEFINE DEVCLASS and so forth) are in error, correct them and reissue the command that requested the volume to be mounted.

ANR14 Mount request 02W *Mount request denied for volume volume name - volume unavailable.*

Explanation

The volume shown cannot be mounted because it is not available.

System action

The volume is not mounted.

User response

If the attempted mount occurs in a library sharing environment and the library manager was recently recycled, try again in five minutes. In this case the library manager and library client need a few minutes to reestablish communication and synchronize the mounting information between the two servers.

ANR14 Scratch volume 03W *Scratch volume mount request denied - mount canceled.*

Explanation

A scratch volume cannot be mounted because the mount request has been canceled.

System action

The scratch volume is not mounted.

User response

None.

ANR14 Scratch volume 04W mount request denied - mount failed.

Explanation

A scratch volume cannot be mounted because the mount request cannot be completed successfully. Possible reasons include, an error in device specifications to the server or the mount request timed out.

System action

The scratch volume is not mounted.

User response

If the device specifications (for example, DEFINE DEVCLASS) are in error, correct them and reissue the command that requested the volume to be mounted.

ANR14 Scratch volume 05W mount request denied - no scratch volume available.

Explanation

A scratch volume cannot be mounted because no scratch volume is available.

System action

The scratch volume is not mounted.

User response

None.

ANR14 Simultaneous 06E write operation could not release all the acquired mount points.

Explanation

A simultaneous write to a primary and copy storage pools failed to release all the acquired mount points. When a simultaneous write operation begins it will attempt to acquire all of the necessary mount points. If a mount point cannot be acquired or the simultaneous write operation has to wait for a mount point, then the operation will release any mount points it has already acquired. This prevents the simultaneous write operation from holding mount points and other mount requests from completing. This message is issued if one of the previously acquired mount points cannot be released.

System action

At least one mount point acquired by simultaneous write operation is not released.

User response

None.

ANR14 Scratch volume 07W mount request denied - storage pool pool name has reached maxscratch limit.

Explanation

A scratch volume cannot be mounted because the storage pool has reached the maximum scratch volume limit allowed by the MAXSCRATCH parameter.

System action

A scratch volume is not mounted.

User response

Use the UPDATE STGPOOL poolname MAXSCRATCH=xx command command to increase the number of scratch volumes allowed in the storage pool.

ANR14 Insertdb 08I command: PREVIEW=YES was specified. No data will be inserted into the database.

Explanation

PREVIEW=YES was specified on the INSERTDB command. Database data will be read and checked for errors, but no data will be written into the database.

System action

Server processing continues.

User response

None.

ANR14 Volume volume 09W name already in use - skipped.

Explanation

During an export or database backup, a volume cannot be used because it is already defined in a storage pool, or has already been used by the current operation, or has been previously used by an export or database backup operation (as recorded in the volume history) or is in use by another process.

System action

The operation continues and the volume is skipped.

User response

Use the QUERY VOLUME command to display the names of volumes that are defined to server storage pools. Use the QUERY VOLHISTORY command to display the names of volumes that have been used for export or database backup operations. If no volume names are displayed using the query commands described above, ensure that the volume identified in this message has not been specified or used more than once in the operation being performed.

ANR14 Access mode for 10W volume volume name now set to "unavailable".

Explanation

The status of the volume shown has been set to unavailable.

System action

None.

User response

None.

ANR14 11W *Access mode for volume volume name now set to "read-only" due to write error.*

Explanation

Because of an unrecoverable write error on the volume shown, the status of the volume has been set to read-only.

System action

None.

User response

None.

ANR14 12W *Volume volume name access mode is "unavailable".*

Explanation

At server startup, the status of the indicated volume is unavailable.

System action

None.

User response

None.

ANR14 13W *Volume volume name access mode is "read-only".*

Explanation

At server startup, the status of the indicated volume is read-only.

System action

None.

User response

None.

ANR14 14W *Volume volume name access mode is "read-only" due to previous write error.*

Explanation

At server startup, the status of the indicated volume is read-only due to an unrecoverable write error, or because an administrator used the UPDATE VOLUME command to set the volume access mode to read-only.

System action

None.

User response

None.

ANR14 15W *Volume volume name access mode is DESTROYED.*

Explanation

At server startup, the status of the indicated volume is DESTROYED. This status can result because the access mode was set to DESTROYED by a storage administrator. This status can also result because the server determined that the database records associated with this volume are damaged and set the status of the volume to DESTROYED. If this is the case, the server

also issues an ANR1316E message.

System action

None.

User response

You can issue the RESTORE VOLUME server command to restore the volume if a storage pool backup is available.

ANR14 16I *command: Read bytes bytes and inserted database entries in elapsed time (read rate megabytes per hour). Checked database objects of database objects.*

Explanation

The command read the indicated number of bytes, and wrote the indicated number of database entries. The command has checked the integrity of the indicated number of database tables.

System action

None.

User response

None.

ANR14 17W *Access mode for volume volume name now set to "read-only" due to excessive read error.*

Explanation

Because of an numerous read errors on the volume shown, the status of the volume has been set to read-only.

System action

None.

User response

Use QUERY VOLUME FORMAT=DETAILED for the volume to view the access mode and number of read errors. You may want to use the MOVE DATA command to move the retrievable data from this volume to another volume. For the damaged files, use the RESTORE VOLUME command to restore a readable copy of the file to the storage pool.

ANR14 18E *command name: Export commands that target another server cannot be issued from the server console.*

Explanation

An EXPORT command that targets another server was issued from the server console. This command cannot be issued from the server console because it requires authentication of the issuing administrator on the target server.

System action

The server ignores the command and continues processing.

User response

Issue the command from an administrative client.

ANR14 command 19E *name : FROMDATE must be specified when FROMTIME is specified.*

Explanation

A command that supports the FROMDATE and FROMTIME parameters was issued with the FROMTIME parameter specified, but without the FROMDATE parameter. When the FROMTIME parameter is used, the FROMDATE parameter must be specified.

System action

The server ignores the command and continues processing.

User response

Reissue the command with both the FROMDATE and FROMTIME parameters specified.

ANR14 Read access 20W *denied for volume volume name - volume access mode = "unavailable".*

Explanation

An attempt to access the named volume for reading fails because the volume status is unavailable.

System action

The volume is not used for read access.

User response

None.

ANR14 Read access 21W *denied for volume volume name - volume is offline.*

Explanation

An attempt to access the named volume for reading failed because the volume is offline.

System action

The volume is not used.

User response

None.

ANR14 Read access 22W *denied for volume volume name - volume access mode="offsite".*

Explanation

An attempt to access the named volume for reading failed because the volume status is offsite.

System action

The volume is not used for read access.

User response

None.

ANR14 Scratch volume 23W *Scratch volume volume name is empty but will not be deleted - volume access mode is "offsite".*

Explanation

The named scratch volume is empty but will not be deleted at this time because the access mode is offsite.

System action

The volume is not deleted.

User response

After bringing the volume onsite, change the access mode to read-only so the volume will be deleted.

ANR14 Read access 24W *denied for volume volume name - volume access mode="destroyed".*

Explanation

An attempt to access the named volume for reading failed because the volume status is destroyed.

System action

The volume is not used for read access.

User response

None.

ANR14 Scratch volume 25W *Scratch volume volume name is empty but will not be deleted - volume state is "mountablenotilib".*

Explanation

The named scratch volume is empty but will not be deleted at this time because the

state of the volume is MOUNTABLENOTINLIB. Possible reasons include, a MOVE MEDIA command was used to check the volume out of the library and the volume was subsequently checked into the library using CHECKIN LIBVOL without first running a MOVE MEDIA command to update the volume state back to MOUNTABLEINLIB state. If this should happen, the QUERY MEDIA will display the volume to be in MOUNTABLEINLIB state since QUERY MEDIA does verify if the volume is actually in the library before displaying the state of the volume.

System action

The volume is not deleted.

User response

The following steps may be used if the volume is to be deleted:

1. Run CHECKOUT LIBVOL to check the affected volume out of the library, the REMOVE=NO option may be used to prevent actual volume movement
2. Run MOVE MEDIA * STG=* WHERESTATE=MOUNTABLENOTINLIB WHERESTATUS=EMPTY. When the volume is moved by MOVE MEDIA WHERESTATE=MOUNTABLENOTINLIB, the scratch empty volume is deleted

3. Check the volume back into the library using CHECKIN LIBVOL command

**ANR14 All legacy FILE
26I volumes have
been marked
FULL.**

Explanation

As part of the conversion of the database to IBM Storage Protect version 5.3, all existing non-full volumes of devtype FILE have been marked FULL to keep them from being extended.

System action

All FILE volumes that were not already FULL have been marked FULL and cannot be appended to.

User response

None.

**ANR14 No legacy FILE
27E volumes were
marked FULL.**

Explanation

As part of the conversion of the database to IBM Storage Protect Version 5.3, all existing non-full volumes of devtype FILE were attempted to be made FULL. However, a database error prevented the conversion, and the status of these volumes remains unchanged.

System action

The volumes are not marked FULL.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. Contact your service representative for further assistance.

**ANR14 Shredding
28W access denied
for volume
volume name -
volume is
offline.**

Explanation

An object on the indicated volume cannot be shredded because the volume is offline.

System action

The object is not shredded at this time. When the volume is put back online, another attempt will be made to shred the object.

User response

Determine why the volume is offline, and, if possible, place the volume back online.

**ANR14 Transaction
29E failed for Import
process - invalid
file space
filespace name
for node node
name was
detected.**

Explanation

During import processing, the server encounters an invalid file space name.

System action

This action usually occurs when the import is operating on a file space that is currently being deleted as a result of an administrative command or client action. The server ends import operation.

User response

Use the QUERY PROCESS command to monitor and wait for any file space deletion processes to complete, or cancel the process if you do not want to delete the file space. Try the import operation again after this action has been taken.

**ANR14 Retrieval
30W request denied
for storage pool
storage pool
name due to the
access state of
the storage
pool.**

Explanation

An attempt was made to retrieve a file from the storage pool shown, but the access mode of the storage pool does not allow for retrieve requests.

System action

The file is not retrieved from this storage pool. If possible, the file is retrieved from another storage pool.

User response

Consider changing the access mode for the storage pool.

**ANR14 An error
31E occurred while
writing to side A
of volume
volume name.
An attempt will
be made to
write to side B
of this volume.**

Explanation

An error occurred while writing to side A of a two-sided volume.

System action

No additional data will be written to side A of this volume. Any remaining space on side A will not be used. An attempt will be made to use the reverse side (side B) of the volume.

User response

None required if the side B can be used successfully. However, the administrator should investigate the cause of the error and may want to move data from this volume.

**ANR14 Updating device
32I configuration
information to
defined files.**

Explanation

The server is updating device configuration information for the files or data sets specified with the DEVCONFIG option in the server options file.

System action

Server operation continues.

User response

None.

**ANR14 Device
33I configuration
information
successfully
written to file
name.**

Explanation

Device configuration information was successfully written to the file specified.

System action

Server operation continues.

User response

None.

**ANR14 No files have
34W been identified
for
automatically
storing device
configuration
information.**

Explanation

The server is unable to automatically update device configuration file. No files were identified using the DEVCONFIG option in the server options file.

System action

Server operation continues.

User response

If you would like to have the server automatically record device configuration information to assist in server recovery, use the DEVCONFIG option in

the server options file to specify where device configuration information should be written. If you update the options file, halt and then restart the server so the changes can take effect.

**ANR14 Server could not
35E write device
configuration
information to
devconfig file
name.**

Explanation

While attempting to write device configuration information to defined files, the server cannot write to the file name specified.

System action

The server cannot write device configuration information to the specified file.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that there is sufficient space in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set. After the problem has been corrected, use the BACKUP DEVCONFIG command to write device configuration information to the file.

**ANR14 Device
36E configuration
file devconfig file
name cannot be
opened.**

Explanation

While attempting to write device configuration information to device configuration files, the server cannot open the file name specified.

System action

The server does not write device configuration information to the file specified.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that there is sufficient space in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set. After the problem has been corrected, use the BACKUP DEVCONFIG command to write device configuration information to the file.

**ANR14 No device
37E configuration
files could be
used.**

Explanation

The server attempts to read device configuration information from defined

files and cannot open any of the files.

System action

The operation is ended.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Ensure that the defined device configuration files have been created. If you can start the server, you can create the files by using the BACKUP DEVCONFIG command. If you cannot start the server, you will need to create a device configuration file by editing the file and adding the appropriate DEFINE commands for the device class, drive, and library definitions. Make sure that the server has proper authority to read from the defined device configuration files.

**ANR14 Skipping device
38W configuration
file: devconfig
file name.**

Explanation

While attempting to read device configuration information from a defined device configuration file, the server encounters problems in processing the definitions included in the file.

System action

The specified file is skipped, and the next one specified in the server options file will be used.

User response

Examine error messages that may have been displayed prior to this message to understand why the file could not be used. When you can start the server again, you can refresh this file by using the BACKUP DEVCONFIG command.

ANR14 Allocate 39E prohibited - transaction failed.

Explanation

While attempting to preallocate storage on a storage pool, the server detected that the transaction for this operation has previously failed. This error may occur when a large file is selected for backup and the client did not properly estimate the file size. There may not be enough space in the storage pool for the file.

System action

An internal error is reported by the server and the operation being performed is ended.

User response

Examine error messages that may have been displayed prior to this message for more information.

ANR14 All drives in use. 40I Process process number being preempted by higher priority operation.

Explanation

When a high priority operation attempted to find an available drive, all the drives were in use. To make a drive available for this operation, the indicated process is being cancelled by the system.

System action

The lower priority process is cancelled to make a mount point (drive) available.

User response

When a drive again becomes available, restart the process that was cancelled. If the process was a migration or reclamation process, it will be automatically restarted when needed. If this message appears frequently, you may want to increase the number of drives available. See the MOUNTLIMIT parameter on the UPDATE DEVCLASS command.

ANR14 Volume volume 41I name is in use. Process process number being preempted by higher priority operation.

Explanation

When a high priority operation attempted to use a volume, it was in use. To make a volume available for this operation, the indicated process is being cancelled by the system.

System action

The lower priority process is cancelled to the volume available.

User response

Restart the process that was cancelled. It will wait until the higher priority process is finished with the volume. If the cancelled process was a migration or reclamation process, it will be automatically restarted when needed.

ANR14 Invalid storage 42E pool for store operation: storage pool.

Explanation

The storage pool selected for a store operation (for example, backup or archive) was not a NATIVE or NONBLOCK data format storage pool. This may be caused by an incorrect management class being assigned to an object.

System action

The operation fails.

User response

Ensure that the copy group destination storage pool of the assigned management class has the appropriate NATIVE or NONBLOCK data format.

ANR14 Process process 43W ID terminated from session session id. A potential drive-contention deadlock was detected.

Explanation

See message.

User response

No action is required.

ANR14 No device 44E configuration file is defined.

Explanation

No device configuration file is defined. Check DEVCONFIG option in server options file.

System action

The specified configuration parameter is skipped.

User response

Add the DEVCONFIG option to the server options file, specifying a valid file or data set name to use for the device configuration file.

ANR14 Insertdb 45I command: Throughput was megabytes per hour megabytes per hour.

Explanation

This message indicates the total throughput (megabytes/hour) during database insert processing.

System action

Server processing continues.

User response

None.

**ANR14 RUNSTATS:
46I Table updating
statistics
started.**

Explanation

This message indicates the update statistics for all tables started.

System action

Server processing continues.

User response

None.

**ANR14 command name:
47W The server is not
able to begin a
new thread to
execute the
command on
line line number
in parallel. The
command will
run serially.**

Explanation

This message is issued during a RUN command to indicate that thread resources are not available to run the command in parallel. The command will be executed serially.

System action

The SCRIPT continues.

User response

Increase the resources available to the server or reduce the number of parallel commands or scripts that are running on the server at any one time.

**ANR14 command name:
48I Beginning serial
SCRIPT**

**command
execution on
line line number.**

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that a SERIAL command was encountered and following SCRIPT commands will be executed serially.

System action

The SCRIPT command continues.

User response

See the output of the commands following the SERIAL command to determine their results.

**ANR14 command name:
49I Beginning
parallel SCRIPT
command
execution on
line line number.**

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that a PARALLEL command was encountered and following SCRIPT commands will be executed in parallel.

System action

The SCRIPT command continues.

User response

See the output of the commands following the PARALLEL command to determine their results.

**ANR14 command name:
50E Invalid
command script
name: command
script name.**

Explanation

An invalid script name was specified for a DEFINE, UPDATE, or DELETE SCRIPT command.

System action

The operation fails.

User response

Reenter the command specifying a valid command name.

**ANR14 To download a
51I device
configuration
file from the
cloud
environment,
provide your
cloud
credentials.**

Explanation

To download a device configuration file, you must specify your cloud credentials when you issue the DSMSEV RESTORE DB command

System action

Server operation ends.

User response

If the database backup is configured for cloud storage, the device configuration file is stored in the cloud. After you issue the DSMSEV RESTORE DB command with your cloud ID and password, the server

can retrieve the device configuration file from the cloud.

**ANR14 command name:
52E Invalid line
number: line
number.**

Explanation

An invalid line number was specified for a DEFINE, UPDATE, or DELETE SCRIPT command.

System action

The operation fails.

User response

Reenter the command specifying a valid line number.

**ANR14 command name:
53E Command script
command script
name already
exists.**

Explanation

The script name specified in a DEFINE SCRIPT command already exists.

System action

The operation fails.

User response

Reenter the command specifying a different command name.

**ANR14 command name:
54I Command script
command script
name defined.**

Explanation

The script name specified in a DEFINE

SCRIPT command was successfully defined.

System action

None

User response

None

ANR14 command name: 55E Command script command script name does not exist.

Explanation

The script name specified in a DEFINE, UPDATE, or DELETE SCRIPT command does not exist.

System action

The operation fails.

User response

Reenter the command specifying a different command name.

ANR14 command name: 56I Command script command script name updated.

Explanation

The script name specified in an UPDATE SCRIPT command was successfully updated.

System action

None

User response

None

ANR14 command name: 57I Command script command script name deleted.

Explanation

The script name specified in a DELETE COMMAND command was successfully deleted.

System action

None

User response

None

ANR14 command name: 58I Line line number was deleted from command script command script name.

Explanation

The specified line number was deleted from the command script as a result of a DELETE SCRIPT command.

System action

None

User response

None

ANR14 command name: 59E Command script command script name, line line number does not exist.

Explanation

The line in command script name specified in a UPDATE, or DELETE SCRIPT command does not exist.

System action

The operation fails.

User response

Reenter the command specifying a different line number.

ANR14 command name: 60I Command script command script name copied to new command script name.

Explanation

The specified command script was copied to a new script with the COPY SCRIPT command.

System action

None

User response

None

ANR14 command name: 61I Executing command script command script name.

Explanation

The specified command script is being executed as a result of a RUN command.

System action

None

User response

None

ANR14 command name: 62I Command script command script name completed successfully.

Explanation

The specified command script, started with a

RUN command, has successfully completed.

System action

None

User response

None

ANR14 command name: 63E Command script command script name completed in error.

Explanation

The specified command script, started with a RUN command, encountered errors.

System action

Part or all of the command lines in the script ended in error. Command processing is terminated.

User response

Examine the messages preceding this message to determine the cause of the error. Correct the command script and reissue the command.

ANR14 command name: 64E Command script command script name, line line number, parameter parameter number was not specified: command line.

Explanation

All parameters required to execute a command script were not specified in the RUN command.

System action

The command fails.

User response

Reenter the RUN command specifying all required parameters.

ANR14 65E *command name: Command script command script name, line line number, parameter is invalid: command line.*

Explanation

An invalid parameter was encountered in a command script.

System action

The command fails.

User response

Correct the script definition and reexecute the RUN command.

ANR14 66I *command name: Command script command script name, Line line number : command line.*

Explanation

The specified line for the command script is being executed. The contexts of the line being executed are displayed.

System action

None

User response

None

ANR14 68E *command name: Command script command script name, continued line is too long*

Explanation

The specified command script with continuation lines is too long to be executed.

System action

The command fails.

User response

Correct the specified command script so that it is shorter.

ANR14 69E *command name: Command script command script name, Line line number is an INVALID command : command line.*

Explanation

The specified line for the command script is not a valid server command. This message is displayed when a RUN command is executed with the PREVIEW=YES parameter specified.

System action

Command Preview processing fails

User response

Correct the script and reenter the RUN command.

ANR14 70I *command name: Command script command script name completed*

successfully (PREVIEW mode).

Explanation

The specified command script, started with a RUN command, has successfully completed.

System action

None.

User response

None.

ANR14 71E *command name: Command script command script name completed in error (PREVIEW mode).*

Explanation

The specified command script, started with a RUN command, encountered errors.

System action

Part or all of the command lines in the command script ended in error. Command processing is terminated.

User response

Examine the messages preceeding this message to determine the cause of the error. Correct the script and reissue the command.

ANR14 72I *command name: Command script command script name renamed to new command script name.*

Explanation

The specified command script was renamed with the RENAME SCRIPT command.

System action

None.

User response

None.

ANR14 73E *command name: A command line cannot be specified when the FILE= parameter is used.*

Explanation

The FILE= parameter was specified in the DEFINE SCRIPT command AND a command line was also specified for the SCRIPT. When the FILE= parameter is specified, a command line cannot be specified.

System action

The command fails.

User response

Reenter the command without the command line OR the FILE= parameter.

ANR14 74E *command name: A line number cannot be specified when the FILE= parameter is used.*

Explanation

The FILE= parameter was specified in the DEFINE SCRIPT command AND

a line number was also specified for the SCRIPT. When the FILE= parameter is specified, a line number cannot be specified.

System action

The command fails.

User response

Reenter the command without the line number OR the FILE= parameter.

ANR14 command name:
75E File file name could not be opened.

Explanation

A filename was specified in a command but the specified file could not be opened by the server.

System action

The command fails.

User response

Examine any messages that might appear prior to this one in the activity log to determine if the error can be found. If the file was to exist for use by the command, ensure that the file does exist and that the server has proper authority to access the file. If the file was to be created by the command, ensure that the filesystem has sufficient space and that the server has authority to create the file in the location specified.

ANR14 command name:
76E File file name contains no data.

Explanation

The FILE= parameter was specified in a command but the specified file did not contain script command lines.

System action

The command fails.

User response

Add script command lines to the file or specify another file and reenter the command.

ANR14 command name:
77E The OUTPUTFILE parameter may only be specified when FORMAT=RAW is specified.

Explanation

The OUTPUTFILE parameter was specified in a QUERY SCRIPT command but the FORMAT parameter did not specify RAW output. When outputting the QUERY to a file, you MUST specify RAW output format.

System action

The command fails.

User response

Reenter the command specifying the proper value for the FORMAT parameter or do not specify the OUTPUTFILE parameter.

ANR14 command name:
78E Error writing to file file name.

Explanation

An error was encountered while writing to the file specified.

System action

The command fails.

User response

Examine any messages that might appear prior to this one in the activity log to determine if the error can be found. Ensure that the filesystem has sufficient space and that the server has authority to create the file in the location specified.

ANR14 command name:
79I Query output was written to file file name.

Explanation

The output from the specified query was successfully written to the specified file.

System action

The command completes successfully.

User response

None.

ANR14 command name:
80E Description text is too long.

Explanation

The specified description text is too long for a command that allows description text to be specified.

System action

The command fails.

User response

Reenter the command specifying a shorter description.

ANR14 command name:
81E A command line or description must be specified.

Explanation

An UPDATE SCRIPT command was specified with out a command line (script line) or description text.

System action

The command fails.

User response

Reenter the command specifying a command line or description text.

ANR14 command name:
82I Found label statement label on line line number and continuing.

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that the target label for a GOTO statement was found.

System action

Command processing continues.

User response

None.

ANR14 command name:
83I Line line number condition IF(condition) is

NOT true - statement is skipped.

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that the a return code condition check failed and the IF(..) statement is skipped.

System action

Command processing continues.

User response

None.

ANR14 command name:
84I Line line number
condition
IF(condition) is
TRUE -
statement will
be executed.

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that the a return code condition check succeeded and the IF(..) statement is executed.

System action

Command processing continues.

User response

None.

ANR14 command name:
85I Ending SCRIPT
with EXIT
statement on
line line number.

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that an EXIT statement was encountered and SCRIPT termination will end.

System action

The SCRIPT command ends.

User response

None.

ANR14 command name:
86I Executing line
line number
GOTO label
name.

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate that a GOTO statement was encountered and processing will skip to the named label.

System action

SCRIPT processing continues.

User response

None.

ANR14 command name:
87I Command
return code is
symbolic return
code (return
code severity).

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate the return code

that was returned from the latest command.

System action

SCRIPT processing continues.

User response

None.

ANR14 command name:
88E Line line number
condition
IF(condition) is
not a valid
condition.

Explanation

This message is issued if an IF() statement in a SCRIPT does not specify proper condition values.

System action

Command processing fails.

User response

Reenter the command using valid conditions for the IF() statement.

ANR14 command name:
89E Line line number
is a GOTO to a
label (label
name) that does
not exist or is
associated with
a line prior to
line line number.

Explanation

This message is issued if a GOTO statement in a SCRIPT does not specify a label that exists in the SCRIPT, or that does exist but is associated with a line prior to the line that contains the GOTO statement.

System action

Command processing fails.

User response

Correct the SCRIPT definition and reenter the RUN command.

ANR14 command name:
90W Command script
command script
name does not
contain any
commands.

Explanation

The script name specified in a RUN command does not contain any commands.

System action

The RUN operation fails (has nothing to do).

User response

Server command Scripts that contain no commands will not execute. Add command lines to the Script and reenter the RUN command.

ANR14 Server
91E command
scripts cannot
be started from
the server
console.

Explanation

A server command script RUN command was issued from the server console. Server command scripts cannot be started from the server console because they may require a long time to complete and the server console should be available to

control other server functions.

System action

The server ignores the command and continues processing.

User response

Start the server command script from an administrative client or schedule it for execution using the administrative command scheduler.

ANR14 92E *command name: A loop has been detected in server command script RUN commands - command failed.*

Explanation

A server command script DEFINE or UPDATE command has created a situation where one or more scripts invoke each other in a loop that can cause the scripts to run indefinitely.

System action

The command fails to update the server command script.

User response

Server command scripts can invoke each other, but not in a fashion that causes a potential loop in their execution. Specify the scripts in a manner that does not cause them to invoke each other in a loop.

ANR14 93E *Command: Administrator administrator*

name is not authorized to update or delete command script command script name.

Explanation

The specified administrator has entered the indicated command, but this administrator does not have the proper authority necessary to update or delete this command script. If an administrator does not have system authority, they must have previously created or updated the script.

System action

The server does not process the command.

User response

Issue the command from a properly authorized administrator ID, or contact the administrator that created the script.

ANR14 94I *command name: Command return code is numeric return code.*

Explanation

This message is issued during a RUN command (VERBOSE=YES) to indicate the numeric return code that was returned from the latest command.

System action

SCRIPT processing continues.

User response

None.

ANR14 95E *command name: command script name is currently running. Define, update or delete can not be performed.*

Explanation

An DEFINE, UPDATE or DELETE SCRIPT was attempted on a script that is currently running.

System action

The operation fails.

User response

Reenter the command when the script is not running.

ANR14 96I

Explanation

The ISSUE MESSAGE command with a severity indicator of INFORMATION was issued.

System action

Server operation continues.

User response

None.

ANR14 97W

Explanation

The ISSUE MESSAGE command with a severity indicator of WARNING was issued.

System action

Server operation continues.

User response

None.

ANR14 98E

Explanation

The ISSUE MESSAGE command with a severity indicator of ERROR was issued.

System action

Server operation continues.

User response

None.

ANR14 99S

Explanation

The ISSUE MESSAGE command with a severity indicator of SEVERE was issued.

System action

Server operation continues.

User response

None.

ANR15 00I *Policy domain domain name defined.*

Explanation

In response to the DEFINE DOMAIN command, the policy domain *domain name* has been defined in the server database.

System action

Server operation continues.

User response

None.

ANR15 Policy domain 01I *domain name deleted.*

Explanation

In response to the DELETE DOMAIN command, the policy domain *domain name* has been deleted from the server database. All policy sets, management classes, copy groups, and schedules related to the domain have also been removed.

System action

Server operation continues.

User response

None.

ANR15 Policy domain 02I *domain name updated.*

Explanation

In response to the UPDATE DOMAIN command, the policy domain *domain name* has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR15 Policy domain 03I *domain name copied to domain target domain.*

Explanation

In response to the COPY DOMAIN command, the policy domain *domain name* has been copied to a new policy domain named *target domain*. All policy sets, management classes, and copy groups are also copied to the *target domain* policy domain.

System action

Server operation continues.

User response

None.

ANR15 Command: No 04I *matching domains.*

Explanation

The server cannot find any policy domains with names that match the specification entered in the command *command*.

System action

Server operation continues.

User response

Reissue the command with a specification that matches an existing policy domain name. Use the QUERY DOMAIN command to obtain a list of the names of existing policy domains.

ANR15 The BACKUP 05W *copy group in*

management class management class name specifies a table of contents destination storage pool : storage pool name that does not exist. If this pool does not exist when policy set policy set name is activated, the creation of the table of contents may fail for an image backup when this management class is used for the backup.

Explanation

This message may be returned from the DEFINE COPYGROUP, UPDATE COPYGROUP, VALIDATE POLICYSET or ACTIVATE POLICYSET command. During the indicated command processing, the server has found a backup copy group that has a table of contents (TOC) destination referring to an undefined storage pool named *storage pool name*. If this storage pool is undefined when the policy set is activated, the creation of the TOC for an image backup will fail if its TOC creation binds to the management class whose copy groups reference this pool.

System action

Server operation continues.

User response

To locate the copy groups that refer to the undefined storage pool, issue the QUERY COPYGROUP command. To change the TOC destination to refer to an existing storage pool, issue the UPDATE COPYGROUP command. To define the storage pool, an authorized administrator can issue the DEFINE STGPOOL command.

ANR15 Command: An 06E *incorrect storage pool name - storage pool name was specified for the TOC destination.*

Explanation

Server processing for the command *command* fails because the storage pool name *pool name* specified for the table of contents (TOC) is an invalid destination storage pool type. A copy storage pool, active-data storage pool, cold-data-cache storage pool, or retention pool is not a valid copy group TOC destination.

System action

The command fails and server operation continues.

User response

Reissue the command using a storage pool name that is not a copy pool, active-data pool, retention pool, or cold-data-cache storage pool. For a list of

names of defined storage pools, issue the QUERY STGPOOL command.

ANR15 07I Table of contents load retention is set to *number of minutes* minutes.

Explanation

The number of minutes that the unreferenced table of contents (TOC) data will remain loaded in the server database has been set to the value indicated with the SET TOCLOADRETENTION command.

System action

None.

User response

None.

ANR15 08E Command: An incorrect table of contents load retention *retention value* was specified.

Explanation

A SET TOCLOADRETENTION command has been entered that specifies an invalid table of contents (TOC) retention period.

System action

The server does not process the command.

User response

Reissue the command with a valid retention period.

ANR15 09E Error writing option *option name* to file *file name*.

Explanation

An error was encountered while writing an option entry to server option file.

System action

The format command fails.

User response

Examine any messages that might appear prior to this one in the activity log to determine if the error can be found. Ensure that the filesystem has sufficient space and that the server has authority to update the server option file then reissue the format command.

ANR15 10I Policy set *set name* defined in policy domain *domain name*.

Explanation

In response to the DEFINE POLICYSET command, the policy set named *set name* has been defined in the policy domain named *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR15 11I Policy set *set name* deleted from policy

domain domain name.

Explanation

In response to the DELETE POLICYSET command, the policy set *set name* has been deleted from the policy domain *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR15 12I Policy set *set name* updated in policy domain *domain name*.

Explanation

In response to the UPDATE POLICYSET command, the policy set *set name* has been updated in the policy domain *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR15 13I Policy set *set name* copied to *set new set name* in policy domain *domain domain name*.

Explanation

In response to the COPY POLICYSET command, the policy set *set name* has been copied to the

policy set *new set name* in the policy domain named *domain name*. All management classes and copy groups are also copied to the policy set *new set name*.

System action

Server operation continues.

User response

None.

ANR15 14I Policy set *set name* activated in policy domain *domain name*.

Explanation

In response to the ACTIVATE POLICYSET command, the policy set *set name* has been activated in the policy domain *domain name*. All management class and copy group definitions in the policy set will be used by clients that start sessions after this command is committed. Clients that currently have sessions established with the server will use the policy definitions in the previously active policy set for the domain.

System action

The server replaces the active management class and copy group definitions for the policy domain with the definitions found in the specified policy set. These values are returned to client nodes that start a session with the server after this command is committed to the server database.

User response

None.

**ANR15 Policy set set
15I name validated
in domain
domain name
(ready for
activation).**

Explanation

This message may be displayed in response to a VALIDATE POLICYSET command. The policy set *set name* has been checked in the domain *domain name* to see if the management class and copy group definitions are adequate for activating the policy set. This message indicates that the policy set may be activated. Warning messages may be issued prior to this message if there are discrepancies in the policy set with respect to the set that is currently active in the policy domain.

System action

The server checks its definitions to determine the policy set's qualifications for activation. The server does not activate the policy set.

User response

If you are satisfied with any warning messages that may have been issued prior to this message concerning any possible discrepancies in the policy set, issue the ACTIVATE POLICYSET command to activate the policy set in the policy domain. Otherwise,

correct the discrepancies prior to activating the policy set. Before the ACTIVATE POLICYSET command is used to activate the policy set, use the validate command to check policy set contents.

**ANR15 Command:
16E Storage pool
storage pool
name is not
enabled for
deduplication.**

Explanation

The command indicated specifies the name of a storage pool which does not have deduplication enabled. The command requires that deduplication be enabled on the storage pool before the command can execute.

System action

The server does not process the command.

User response

Update the storage pool to allow data deduplication by specifying the parameter DEDUPLICATE=YES. But only do so if you wish to have duplicates of data in the storage pool removed.

**ANR15 Insertdb
17I command:
Processed
number of
database
records
database
records.**

Explanation

This message indicates the total number of database records that were successfully inserted during database insert processing.

System action

Server processing continues.

User response

None.

**ANR15 Insertdb
18I command: Read
number of bytes
bytes.**

Explanation

This message indicates the total number of bytes that were successfully read during database insert processing.

System action

Server processing continues.

User response

None.

**ANR15 Insertdb
19I command:
Elapsed time
was elapsed
time.**

Explanation

This message indicates the total amount of time that elapsed during database insert processing.

System action

Server processing continues.

User response

None.

**ANR15 Management
20I class class name
defined in policy
domain domain
name, set set
name.**

Explanation

In response to the DEFINE MGMTCLASS command, the management class named *class name* has been defined in the policy set *set name* belonging to the policy domain named *domain name*.

System action

Server operation continues.

User response

None.

**ANR15 Management
21I class class name
deleted from
policy domain
domain name,
set set name.**

Explanation

In response to a DELETE MGMTCLASS command, the management class named *class name* has been deleted from the policy set *set name* belonging to the policy domain *domain name*. All copy groups defined for the management class are also removed.

System action

Server operation continues.

User response

None.

ANR15 Management 22I class *class name* updated in policy domain *domain name*, set *set name*.

Explanation

In response to the UPDATE MGMTCLASS command, the management class named *class name* has been updated in the policy domain *domain name*, policy set *set name*.

System action

Server operation continues.

User response

None.

ANR15 Management 23I class *class name* copied to class *new class name* in policy domain *domain name*, set *set name*.

Explanation

In response to the COPY MGMTCLASS command, the management class named *class name* has been copied to a new management class named *new class name* in policy set *set name* belonging to policy domain *domain name*. All copy groups defined for management class *class name* are also copied to management class *new class name*.

System action

Server operation continues.

User response

None.

ANR15 Insertdb 24I command: Beginning database update phase.

Explanation

The database insert process has completed inserting database records, and has begun making updates to the inserted records.

System action

Server processing continues.

User response

None.

ANR15 command: 25I Updated *database entries* of *database entries* database entries in *elapsed time*.

Explanation

The command has updated the indicated number of database entries.

System action

None.

User response

None.

ANR15 Insertdb 26I command: Building indices

and checking table integrity.

Explanation

The database insert process has begun to create indices and check the integrity of the database tables.

System action

Server processing continues.

User response

None.

ANR15 command: 27I Checked *database objects* of *database objects* database objects in *elapsed time*.

Explanation

The command has checked the integrity of the indicated number of database tables.

System action

None.

User response

None.

ANR15 RUNSTATS: 28I Table updating statistics completed in *elapsed time*.

Explanation

This message indicates the update statistics for all tables completed.

System action

Server processing continues.

User response

None.

ANR15 Process process 29I ID skipped *File state* deduplicated extent *Extent id* on volume *Volume name*.

Explanation

While moving or copying deduplicated extents from a sequential FILE volume, extents were encountered that were marked deleted or damaged. As a result, the extents were skipped.

System action

The server moves or copies all extents from the volume that are not marked damaged or deleted. The damaged or deleted extents are skipped.

User response

If the deduplicated extent was marked damaged, audit the indicated volume with FIX=NO to verify whether the file is damaged. The audit will reset the file status if the deduplicated extent is not damaged.

If the deduplicated extent has been marked deleted, it is not copied to another storage pool.

ANR15 Backup copy 30I group *group name* defined in policy domain

domain name, set set name, management class class name.

Explanation

In response to the DEFINE COPYGROUP command, a backup copy group named *group name* has been defined for the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 Backup copy 31I *group group name deleted from policy domain domain name, set set name, management class class name.*

Explanation

In response to the DELETE COPYGROUP command, the backup copy group named *group name* has been deleted from the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 Backup copy 32I *group group name updated in policy domain domain name, set set name, management class class name.*

Explanation

In response to the UPDATE COPYGROUP command, the backup copy group named *group name* has been updated in the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 command: The 33E *target client version that was specified is not valid. The value name value: value in the form V.R.M.F. (Version, Release, Modification, and Fix Level) is incorrect.*

Explanation

During pre-processing of command *command*, an invalid value was encountered for the client target level. The correct client target level should be formatted like 6.2.0.0

System action

The register/update node fails.

User response

Specify the correct client target level, then reissue the command.

ANR15 Process process 34I *ID skipped Num Files deduplicated files on volume Volume name because copies of the files were not found.*

Explanation

The DEDUPREQUIRESBACKUP server option is set to YES. If the value of this option is YES (the default), files within a deduplicated storage pool must be backed up to a non-deduplicated copy storage pool before the files can be moved.

System action

The operation skips the files without copies and continues the operation.

User response

Ensure that all files in the primary storage pool are backed up to a non-deduplicated copy storage pool. You can also change the value of the DEDUPREQUIRESBACKUP server option to NO. However, doing so can result in unrecoverable data loss if a data-integrity error occurs. As a best practice, do not change the default.

ANR15 Archive copy 35I *group group name defined in policy domain domain name, set set name, management class class name.*

Explanation

In response to the DEFINE COPYGROUP command, an archive copy group named *group name* has been defined for the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 Archive copy 36I *group group name deleted from policy domain domain name, set set name, management class class name.*

Explanation

In response to the DELETE COPYGROUP command, the archive copy group named *group name* has been deleted from the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 Archive copy 37I *group group name updated in policy domain domain name, set set name, management class class name.*

Explanation

In response to the UPDATE COPYGROUP command, the archive copy group named *group name* has been updated in the management class named *class name* in the policy set *set name* belonging to policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR15 Default 38I *management class set to class name for policy domain domain name, set set name.*

Explanation

The default management class for the policy set *set name* in policy domain *domain name* has been set to the management class named *class name*.

System action

If this policy set is activated, clients use this management class for backup-archive processing by default, or if other management classes specified for binding do not exist in the policy set.

User response

None.

ANR15 A previous 39S *database upgrade did not succeed. The server cannot start.*

Explanation

A DSMSERV INSERTDB command used to upgrade from IBM Storage Protect V5 failed or was cancelled. The result is a database that does not contain all of the data from the original database. The server cannot be run with an incomplete database.

System action

The server will not start.

User response

Rerun the DSMSERV INSERTDB command.

ANR15 Import 40E *command: The processing stopped. The connection with the source server is broken.*

Explanation

The communications link with the source server

broke because of a network error or because the source-server export process stopped.

System action

The import process ends.

User response

Examine the activity log of the source server to determine if the export process stopped. A network failure can also cause this message to be displayed. If many communication error messages occur simultaneously, check the network for failure and correct any problems.

ANR15 Export 41E *command: The processing stopped. The connection with the target server is broken.*

Explanation

The communications link with the target server broke because of a network error or because the target-server import process stopped.

System action

The export process ends.

User response

Examine the activity log of the target server to determine if the import process stopped. A network failure can also cause this message to be displayed. If many communication error messages occur simultaneously, check the

network for failure and correct any problems.

ANR15 Import 42E *command: Preview processing stopped. The connection with the source server is broken.*

Explanation

The communications link with the source server broke because of a network error or because the source-server export process stopped.

System action

The import process ends.

User response

Examine the activity log of the source server to determine if the export process stopped. A network failure can also cause this message to be displayed. If many communication error messages occur simultaneously, check the network for failure and correct any problems.

ANR15 Export 43E *command: Preview processing stopped. The connection with the target server is broken.*

Explanation

The communications link with the target server broke because of a network error or because the target-server import process stopped.

System action

The export process ends.

User response

Examine the activity log of the target server to determine if the import process stopped. A network failure can also cause this message to be displayed. If many communication error messages occur simultaneously, check the network for failure and correct any problems.

ANR15 The DEDUPTIER3FILESIZE option value is updated from old value to new value.
44I

Explanation

The value for the DEDUPTIER3FILESIZE option must be greater than or equal to the value for the DEDUPTIER2FILESIZE option. The value for the DEDUPTIER3FILESIZE option is increased to match the value for the DEDUPTIER2FILESIZE option.

System action

Server operations continue.

User response

Use the SETOPT command to update the value for either the DEDUPTIER2FILESIZE option or the DEDUPTIER3FILESIZE option. Ensure that the value for the DEDUPTIER3FILESIZE option is greater than or

equal to the value for the DEDUPTIER2FILESIZE option when you are specifying the values.

ANR15 The diagpath (path) file system or disk is becoming full. Space available: space available MB of total space MB. Percent full: file system used ratio percent.
45W

Explanation

The file system or disk containing the db2diag.log file is becoming full. This could cause problems with the server if other Db2 or server databases are in this space.

System action

None.

User response

Add space to the file system or free up space on the file system or disk.

ANR15 Available space for the directory (path) is less than 1 GB. If there is no space available the server can no longer function correctly.
46W

Explanation

There is less than 1 GB of available space in the file system or disk where the server database files are located. When a server is initially created, with the DSMSEV FORMAT utility or with the configuration

wizard, a server database and recovery log are created. In addition, files are created to hold database information used by the database manager. The specified path is the location of the database information used by the database manager. If there is no space available, the server can no longer function correctly.

System action

None.

User response

Add space to the file system or free up space on the file system or disk.

ANR15 The server failed to update the DBDIAGLOGSIZE server option due to insufficient available space. Required space: new value megabytes; available space: system free space megabytes. The current value:current value megabytes.
47W

Explanation

There was not enough free space in the filesystem or drive to create db2diag.log files.

System action

The update fails but the server continues.

User response

Because the value in the server option and logattr.chk have been updated, you must change them to the current value so that they are consistent with the value stored in the database manager. Free the required disk space and update the DBDIAGLOGSIZE option.

ANR15 The server failed to format or initialize because the available space (free spacebytes) in the diagnostic data directory path path is less than 2MB to allocate db2diag.log files;
48E

Explanation

There was not enough free space in the diagnostic directory to allocate 2MB db2diag.log files.

System action

The server stops.

User response

Free the required disk space in the diagnostic directory to at least 2MB and then run the command again.

ANR15 Transaction failed for session session number for node node name (client platform). The next storage pool pool name for
49W

the primary storage pool *pool name* cannot be a target for LAN-free backup.

Explanation

The server rolled back a database update transaction for the specified session because the specified next storage pool of the specified primary storage pool cannot be a target for LAN-free backup.

System action

The specified session is ended and server operation continues.

User response

An authorized administrator can issue the UPDATE STGPOOL command for the specified primary storage pool to remove the specified next storage pool from the parameter NEXTSTGPOOLS. Alternatively, an authorized administrator can enable LAN-free backup to the specified next storage pool.

ANR15 50W Management class *class name* is NOT defined in policy set *set name* but IS defined in the ACTIVE policy set for domain *domain name*: files bound to this management class will be REBOUND to the default management

class if/when this set is activated.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found a management class named *class name* in the currently active policy set, but not defined in the policy set being validated or activated (*set name*). If policy set *set name* is activated, files bound to this management class in domain *domain name* are automatically rebound to the default management class in policy set *set name*.

System action

Server operation continues.

User response

If you do not want files to be rebound to the default management class, define a management class with the name specified in the message for the policy set. To define the proper copy group attributes, reference the management class definition in the ACTIVE policy set or copy the management class *class name* from the ACTIVE policy set to policy set *set name* using the COPY MGMTCLAS command.

ANR15 51W BACKUP copygroup *group name* in management

class *class name* is NOT defined in policy set *set name* but is defined in the ACTIVE policy set for domain *domain name*: files bound to this management class will no longer be backed up if/when *set name* is activated.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found a backup copy group named *group name* for management class *class name* in the currently active policy set, but the copy group is not defined for the management class in the policy set being validated or activated (*set name*). If policy set *set name* is activated, files bound to management class *class name* in domain *domain name* will no longer be eligible for backup processing.

System action

Server operation continues.

User response

If you want files bound to this management class to be eligible for backup processing, define an archive copy group for management class *class name* by using

the DEFINE COPYGROUP command.

ANR15 52W ARCHIVE copygroup *group name* in management class *class name* is NOT defined in policy set *set name* but is defined in the ACTIVE policy set for domain *domain name*: attempting to archive files specifying this management class will fail if *set name* is activated.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found an archive copy group named *group name* for management class *class name* in the currently active policy set, but the copy group is not defined for the management class in the policy set being validated or activated (*set name*). If policy set *set name* is activated, attempting to archive files specifying this management class will fail. Existing archives bound to this management class on the IBM Storage Protect server will be expired based on the defmgmtclass values, or the archive retention grace period for the policy domain, if the default management class does

not contain an archive copygroup.

System action

Server operation continues.

User response

To archive files specifying this management class, define an archive copy group for management class *class name* by using the DEFINE COPYGROUP command.

ANR15 DEFAULT 53W Management class *class name* in policy set *domain name set name* does not have a BACKUP copygroup: files will not be backed up by default if this set is activated.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for policy set *set name* in policy domain *domain name*, the server has found that the default management class named *class name* does not have a backup copy group. This message warns the administrator that activation of this policy set results in client files not being backed up, unless they are bound to a management class (which has a copy group) other than the default.

System action

Server operation continues.

User response

To define a backup copy group for the management class, issue the DEFINE COPYGROUP command. To assign a different default management class for the domain, issue the ASSIGN DEFMGMTCLASS command. Take either action if you want files to be backed up by default.

ANR15 DEFAULT 54W Management class *class name* in policy set *domain name set name* does not have an ARCHIVE copygroup: files will not be archived by default if this set is activated.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for policy set *set name* in policy domain *domain name*, the server has found that the default management class named *class name* does not have an archive copy group. This message warns the administrator that activation of this policy set will result in client files not being allowed archive processing unless they are bound to a management class (which has an archive copy

group) other than the default.

System action

Server operation continues.

User response

To define a backup copy group for the management class, issue the DEFINE COPYGROUP command. To assign a different default management class for the domain, issue the ASSIGN DEFMGMTCLASS command. Take either action if you want files to be eligible for archive processing by default.

ANR15 55W The BACKUP copy group in management class *management class name* specifies a destination that does not refer to a defined storage pool: *storage pool name*. If this pool does not exist when policy set *policy set name* is activated, clients will fail when using this management class to backup files to the server.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for *set name*, the server has

found a backup copy group destination that references an undefined storage pool named *pool name*. If this storage pool is undefined when the policy set is activated, backup or archive operations will fail for clients with files bound to the management class whose copy groups reference this pool.

System action

Server operation continues.

User response

To locate the copy groups that refer to the undefined storage pool, issue the QUERY COPYGROUP command. To change the destination to refer to an existing storage pool, issue the UPDATE COPYGROUP command. To define the storage pool, an authorized administrator can issue the DEFINE STGPOOL command.

ANR15 56W The ARCHIVE copy group in management class *management class name* specifies a destination that does not refer to a defined storage pool: *storage pool name*. If this pool does not exist when policy set *policy set name* is activated, clients will fail when using this management

class to archive files to the server.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for *set name*, the server has found a archive copy group destination that references an undefined storage pool named *pool name*. If this storage pool is undefined when the policy set is activated, backup or archive operations will fail for clients with files bound to the management class whose copy groups reference this pool.

System action

Server operation continues.

User response

To locate the copy groups that refer to the undefined storage pool, issue the QUERY COPYGROUP command. To change the destination to refer to an existing storage pool, issue the UPDATE COPYGROUP command. To define the storage pool, an authorized administrator can issue the DEFINE STGPOOL command.

ANR15 57W The space management migration destination in management class *management class name* does

not refer to a defined storage pool: *storage pool name*. If this pool does not exist when policy set *policy set name* is activated, clients will fail when using this management class to migrate space-managed files to the server.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for *set name*, the server has found a space management migration destination that references an undefined storage pool named *pool name*. If this storage pool is undefined when the policy set is activated, space management migration operations will fail for clients with files bound to the management class that references this pool.

System action

Server operation continues.

User response

To locate the management class that refers to the undefined storage pool, issue the QUERY MGMTCLASS command. To change the destination to refer to an existing storage pool, issue the UPDATE MGMTCLASS command.

To define the storage pool, an authorized administrator can issue the DEFINE STGPOOL command.

ANR15 58E The space management migration destination in management class *management class name* in policy set *policy set name* refers to copy storage pool: *storage pool name*. Copy storage pools are not a valid migration destination.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for *set name*, the server has found a space management migration destination that references a copy storage pool named *pool name*.

System action

Server operation continues. The policy set is not activated.

User response

To locate the management class that refers to the copy storage pool, issue the QUERY MGMTCLASS command. To change the destination to refer to a non-copy storage pool, issue the UPDATE MGMTCLASS command.

ANR15 59E The copy group destination for type *copy group type* in management class *management class name* in policy set *policy set name* refers to copy storage pool: *storage pool name*. Copy storage pools are not a valid copy group destination.

Explanation

This message may be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation for *set name*, the server has found a copy group destination that references a copy storage pool named *pool name*.

System action

Server operation continues. The policy set is not activated.

User response

To locate the management class that refers to the copy storage pool, issue the QUERY MGMTCLASS command. To change the destination to refer to a non-copy storage pool, issue the UPDATE MGMTCLASS command.

ANR15 60E Command: Invalid policy domain name - *domain name*.

Explanation

Server processing for the command *command* fails because the policy domain name *domain name* specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a policy domain name that conforms to these name requirements.

ANR15 Command: 61E Command failed, the RETRIEVALTYPE value value is not allowed for the volume volume.

Explanation

The provided RETRIEVALTYPE value cannot be used either due to this volume's cloud storage class, or because of the specific cloud provider.

System action

The server does not process the command.

User response

Either omit the RETRIEVALTYPE parameter on the

command, or specify a different RETRIEVALTYPE value.

ANR15 Command: 62E Policy domain description exceeds length limit characters.

Explanation

Server processing for the command *command* fails because the policy domain description specified is longer than the *length limit* number of characters allowed.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a shorter policy domain description.

ANR15 Command: 63E Invalid retention period for BACKRETN parameter - retention value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention value*) specified for the BACKRETN parameter is not valid.

System action

Database changes for the command are rolled back and server operation

continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid BACKRETN value.

ANR15 Command: 64E Invalid retention period for ARCHRETN parameter - retention value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention value*) specified for the ARCHRETN parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid ARCHRETN value.

ANR15 Command: 65E Invalid policy set name - set name.

Explanation

Server processing for the command *command* fails because the policy set name *set name* specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a policy set name that conforms to valid name requirements.

ANR15 Command: 66E Policy set description exceeds length limit characters.

Explanation

Server processing for the command *command* fails because the policy set description specified is longer than the *length limit* number of characters allowed.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a shorter policy set description.

ANR15 Command: 67E Invalid management class name - class name.

Explanation

Server processing for the command *command* fails

because the management class name *class name* specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a management class name that conforms to valid name requirements.

ANR15 Command:
68E Management class description exceeds length limit characters.

Explanation

Server processing for the command *command* fails because the management class description specified is longer than the *length limit* number of characters allowed.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a shorter

management class description.

ANR15 Command:
69E Invalid copy group name - group name.

Explanation

Server processing for the command *command* fails because the copy group name *group name* specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a copy group name that conforms to valid name requirements.

ANR15 Command:
70E Invalid copy frequency - frequency value.

Explanation

Server processing for the copy group command *command* fails because the value (*frequency value*) specified for the FREQUENCY parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in

changing the server database.

User response

Reissue the command and specify a valid FREQUENCY value.

ANR15 Command:
71E Invalid copy destination - pool name.

Explanation

Server processing for the command *command* fails because the storage pool name *pool name* specified for the copy group destination or for the table of contents (TOC) destination does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a storage pool name that conforms to valid name requirements.

ANR15 Command:
72E Missing copy destination.

Explanation

Server processing for the copy group command *command* fails because the required copy group destination is not specified.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify the required copy group destination (DEST).

ANR15 Command:
73E Invalid copy type - type value.

Explanation

Server processing for the copy group command *command* fails because the value (*type value*) specified for the TYPE parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid TYPE value.

ANR15 Command:
74E Invalid version count for VEREXISTS parameter - version value.

Explanation

Server processing for the copy group command *command* fails because

the value (*version value*) specified for the VEREXISTS parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid VEREXISTS value.

ANR15 Command:
75E Invalid version count for VERDELETED parameter - version value.

Explanation

Server processing for the copy group command *command* fails because the value (*version value*) specified for the VERDELETED parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid VERDELETED value.

ANR15 Command:
76E Invalid retention period for RETEXTRA

parameter - retention value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention value*) specified for the RETEXTRA parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid RETEXTRA value.

ANR15 Command:
77E Invalid retention period for RETONLY parameter - retention value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention value*) specified for the RETONLY parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid RETONLY value.

ANR15 Command:
78E Invalid version count for RETVER parameter - retention value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention value*) specified for the RETVER parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid RETVER value.

ANR15 Command:
79E Invalid copy mode - mode value.

Explanation

Server processing for the copy group command *command* fails because the value (*mode value*) specified for the MODE parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in

changing the server database.

User response

Reissue the command and specify a valid MODE value.

ANR15 Command:
80E Invalid copy serialization mode - serialization value.

Explanation

Server processing for the copy group command *command* fails because the value (*serialization value*) specified for the SERIALIZATION parameter is not valid.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify a valid SERIALIZATION value.

ANR15 Command: The
81E option option is valid only for backup copy groups.

Explanation

Server processing for the archive copy group command *command* fails because the *option* specified is only valid for backup copy group definitions.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying valid archive copy group options, or specify TYPE=BACKUP if the intent is to operate on a backup copy group.

ANR15 Command: The 82E option option is valid only for archive copy groups.

Explanation

Server processing for the backup copy group command *command* fails because the *option* specified is only valid for archive copy group definitions.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying valid backup copy group options, or specifying TYPE=ARCHIVE if the intent is to operate on an archive copy group.

ANR15 Command: Copy 83E frequency for archive copy groups must be

CMD - frequency value is not valid.

Explanation

Server processing for the archive copy group command *command* fails because a value other than CMD has been specified for the FREQUENCY parameter. The only value that may be specified for the archive copy group FREQUENCY parameter is CMD.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying CMD for the FREQUENCY parameter, or omitting the FREQUENCY parameter because the default value for FREQUENCY is CMD for archive copy groups.

ANR15 Command: Copy 84E mode for archive copy groups must be ABSOLUTE - mode value is not valid.

Explanation

Server processing for the archive copy group command *command* fails because a value other than ABSOLUTE has been specified for the MODE parameter. The only value that may be specified

for the archive copy group MODE parameter is ABSOLUTE.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying ABSOLUTE for the MODE parameter, or omitting the MODE parameter because the default value for MODE is ABSOLUTE for archive copy groups.

ANR15 Command: 85E Policy set ACTIVE cannot be modified.

Explanation

Server processing for the command *command* fails because the policy set name ACTIVE is specified. Objects in the ACTIVE policy set for a domain may only be changed through activation of another policy set.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a policy set other than ACTIVE. To

copy the ACTIVE policy set for a policy domain to another name so that commands may be used to change its contents, issue the COPY POLICYSET command. Then to activate the changes, issue the ACTIVATE POLICYSET command.

ANR15 Command: 86E Invalid migration destination - pool name.

Explanation

Server processing for the command *command* fails because the storage pool name *pool name* specified for the migration destination is an invalid storage pool type. A copy storage pool, cold-data-cache storage pool, or retention pool is not a valid migration destination.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command using a storage pool name that is a valid storage pool type. For a list of names of defined storage pools, issue the QUERY STGPPOOL command.

ANR15 Command: 87E Invalid copy group

**destination -
pool name.**

Explanation

Server processing for the command *command* fails because the storage pool name *pool name* specified for the copy group destination is a copy pool, active-data pool, retention pool, or container-copy pool. A copy pool, active-data pool, retention pool, or container-copy pool is not a valid copy group destination.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify the name of a primary storage pool. The storage pool that you specify for the copy group destination cannot be a copy pool, active-data pool, retention pool, or container-copy pool. For a list of the storage pool names that are defined, issue the QUERY STGPOOL command.

ANR15 88W **The value of the ACTIVEDESTINATION parameter received from the configuration manager specifies a storage pool storage pool name for**

domain domain name that is not defined on the managed server.

Explanation

If the storage pool on the managed server is undefined, the value of the ACTIVEDESTINATION parameter for domain *domain name* is not updated.

System action

Server operation continues.

User response

Define an active-data storage pool on the managed server with the same name as that on the configuration manager.

ANR15 89E **Error reason code updating database manager security plugin file name.**

Explanation

The server was unable to update the database manager security plugin. This plugin controls access to the database manager from the IBM Storage Protect server. The reason code is the errno from the fopen subroutine for the file. Some common reason codes are:

- 26 - The file is in use.
- 13 - Permission to write to the file is denied. On Windows, this reason code can also indicate that the file is in use.

For other reason codes, refer to your operating

system reference guide for errno values.

System action

The server stops.

User response

Manually copy the file from the installation directory to the location identified in the message, and restart the server. On AIX, you might also need to run the /usr/sbin/slibclean command as root after halting the server but before copying the file. This procedure will unload the plugin from the kernel memory.

ANR15 90E **Command: Policy domain domain name is not defined.**

Explanation

Server processing for the command *command* fails because the policy domain name *domain name* does not refer to a defined policy domain in the server database. If you used the REPLICATE NODE command, this message applies to the target server.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a policy domain name that is defined in the server

database. For a list of the names of defined policy domains in the server database, issue the QUERY DOMAIN command.

ANR15 91E **Command: Policy domain domain name is already defined.**

Explanation

Server processing for the command *command* fails because the policy domain name *domain name* specified refers to a policy domain that is already defined in the server database.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a policy domain name that is not defined in the server database. For a list of the names of defined policy domains in the server database, issue the QUERY DOMAIN command.

ANR15 92E **Command: Policy domain domain name still contains at least one policy set.**

Explanation

Server processing for the delete command *command* fails because the policy domain name

domain name specified refers to a policy domain that still contains at least one policy set.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To delete the policy set from the policy domain, issue the DELETE POLICYSET command.

ANR15 Command:
93E Policy domain *domain name* still contains at least one node.

Explanation

Server processing for the delete command *command* fails because the policy domain name *domain name* specified refers to a policy domain that still contains at least one node. A policy domain cannot be deleted if one or more client nodes are still assigned to the domain.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To remove remaining nodes from the policy domain, issue

the REMOVE NODE command. After all nodes are removed, issue the delete command again.

ANR15 Command:
94E Policy domain *domain name* has no active policy set.

Explanation

Server processing for the update or register node command *command* fails because the policy domain name *domain name* specified refers to a policy domain that does not have an active policy set defined. Nodes cannot be assigned to policy domains that do not have an active policy set.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To activate a policy set for the specified policy domain, issue the ACTIVATE POLICYSET command. After a policy set has been activated, client nodes may be assigned to the policy domain.

ANR15 Command:
95E Policy set set *name* is not defined in policy domain *domain name*.

Explanation

Server processing for the command *command* fails because the policy set name *set name* specified does not refer to a defined set in policy domain *domain name* in the server database.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a policy set name that is defined in the policy domain. For a list of the names of defined policy sets in the policy domain, issue the QUERY POLICYSET command.

ANR15 Command:
96E Policy set set *name* is already defined in policy domain *domain name*.

Explanation

Server processing for the command *command* fails because the policy set name *set name* specified refers to a policy set that is already defined in policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in

changing the server database.

User response

Reissue the command specifying a policy set name that is not defined in the policy domain. For a list of the names of defined policy sets in the policy domain, issue the QUERY POLICYSET command.

ANR15 policy set
97E command:
Policy set set *name* in domain *domain name* still contains at least one management class.

Explanation

The *policy set command* failed because the set still contains at least one management class definition.

System action

The command fails and server operation continues.

User response

Remove the remaining management classes from the policy set and reissue the command.

ANR15 Command: No
98E default management class has been assigned for policy set set *name* in domain *domain name*.

Explanation

Server processing for the command *command*

fails because the policy set *set name* in policy domain *domain name* does not have a default management class assigned.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To assign a default management class in the policy set, issue the ASSIGN DEFMGMTCLASS command.

ANR15 Command:
99E Management class *class name* is not defined in policy domain *domain name*, set *set name*.

Explanation

Server processing for the command *command* fails because the management class name *class name* specified does not refer to a defined management class in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a policy set name that is defined in the policy domain. For a list of the names of defined policy sets in the policy domain, issue the QUERY POLICYSET command.

ANR16 Command:
00E Management class *class name* is already defined in policy domain *domain name*, set *set name*.

Explanation

Server processing for the command *command* fails because the specified management class name *class name* refers to a management class that is already defined in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a management class name that is not defined in the policy set. For a list of the names of defined management classes in the policy domain and policy set, issue the QUERY MGMTCLASS command.

ANR16 Command:
02E Backup copy

group *group name* is not defined in policy domain *domain name*, set *set name*, management class *class name*.

Explanation

Server processing for the command *command* fails because the backup copy group named *group name* specified for management class *class name* does not refer to a defined backup copy group in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a copy group name that is defined. For a list of the names of defined copy groups and management classes in the policy domain or policy set, issue the QUERY COPYGROUP command.

ANR16 Command:
03E Backup copy group *group name* is already defined in policy domain *domain name*, set *set name*, management class *class name*.

Explanation

Server processing for the command *command* fails because the specified backup copy group named *group name* refers to a copy group that is already defined for management class (*class name*) in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a copy group that is not defined in the policy set. For a list of the names of defined copy groups for management classes in the policy domain and policy set, issue the QUERY COPYGROUP command.

ANR16 Command:
04E Archive copy group *group name* is not defined in policy domain *domain name*, set *set name*, management class *class name*.

Explanation

Server processing for the command *command* fails because the archive copy group named *group name* specified for management class *class*

name does not refer to a defined archive copy group in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a copy group name that is defined. For a list of the names of defined copy groups and management classes in the policy domain or policy set, issue the QUERY COPYGROUP command.

ANR16 05E Command: Archive copy group *group name* is already defined in policy domain *domain name*, set *set name*, management class *class name*.

Explanation

Server processing for the command *command* fails because the specified archive copy group named *group name* refers to a copy group that is already defined for management class *class name* in policy set *set name* belonging to policy domain *domain name*.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command specifying a copy group that is not defined in the policy set. For a list of the names of defined copy groups for management classes in the policy domain and policy set, issue the QUERY COPYGROUP command.

ANR16 06E Out of server LOG space in accessing policy tables.

Explanation

The server ends a database update transaction for policy information because sufficient log space is not available on the server.

System action

The policy operation is ended and server operation continues.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of

log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR16 07E Out of server DB space in accessing policy tables.

Explanation

The server ends a database update transaction for policy information because sufficient database space is not available on the server.

System action

The policy operation is ended and server operation continues.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR16 08E Error fetching entry for domain *domain name*, set *set name*.

Explanation

An internal server database error occurs while retrieving policy information for policy set *set name* in domain *domain name*.

System action

The policy operation is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR16 09E Policy error: unable to find management class ID for class *class name* in policy set *set name* belonging to domain *domain name*.

Explanation

An internal server database error has been encountered while retrieving policy information for management class *class name* in policy set *set name* belonging to policy domain *domain name*.

System action

The policy operation is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR16 Internal Server 10E error: invalid copy type copy type integer encountered in policy set validation.

Explanation

An internal server database error has been encountered while validating a policy set in response to the VALIDATE POLICYSET or ACTIVATE POLICYSET command.

System action

The policy operation is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved,

contact your service representative.

ANR16 Command: 11E Invalid management class name - management class name.

Explanation

Server processing for the command *command* fails because the specified management class name may not be used as a management class name.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Reissue the command and specify another management class name.

ANR16 Command: 12E Management class management class name in policy set set name, domain domain name specifies MIGREQUIRESBKUP=YES, but contains no backup copy group.

Explanation

During policy set validation or activation for policy set *set name* in policy domain *domain name*, the server has found that the management

class named *class name* specifies the MIGREQUIRESBKUP=YES parameter but does not contain a backup copy group. Policy set validation or activation fails in this case because it would not be possible to ensure that space-managed client files are backed up prior to being migrated to the server.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To define a backup copy group within the management class, issue the DEFINE COPYGROUP command. To change the MIGREQUIRESBKUP parameter, issue the UPDATE MGMTCLASS command.

ANR16 Command: 13E Invalid retention initiation - retention initiation value.

Explanation

Server processing for the copy group command *command* fails because the value (*retention initiation value*) specified for the RETINIT parameter is not valid.

System action

The command fails.

User response

Issue the command again and specify a valid RETINIT value.

ANR16 Command: 14E Invalid number of days for RETMIN parameter - days value.

Explanation

The command fails.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a valid RETMIN value.

ANR16 Command: 15E RETVER of NOLIMIT cannot be specified with RETINIT value of EVENT.

Explanation

Server processing for the copy group command *command* fails because the retain versions value of NOLIMIT is not allowed with the retention initiation value of EVENT. If this is the UPDATE copy group command, at least one of the values might have been defined already.

System action

Database changes for the command are rolled

back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a valid RETVER or RETMIN value.

ANR16 16W *Command: the specified RETMIN value (new days) will be ignored because the RETINIT value is CREATION for domain policy set management class.*

Explanation

Processing for the copy group command *command* detected that a retain minimum number of days value was specified either with the retention initiation value of CREATION, or the current retention initiation value stored for the copy group is CREATION. The retain minimum number of days value is not used when the retention initiation value is CREATION. The copy group will be defined or updated, but the RETMIN value will not be stored.

System action

The copy group is defined or updated and system operation continues.

User response

The copy group will be defined or updated, but the retain minimum

number of days value will not be stored. If you want to specify a retention initiation value of EVENT, issue the update command again.

ANR16 17W *Command: the new RETVER value (new days) is less than the value previously stored (old days) for domain policy set management class.*

Explanation

Processing for the copy group command *command* detected that the new number of days to retain versions is less than the number of days currently stored for the copy group. If archive retention protection is active, the policy set might not activate because the retain versions value is not allowed to decrease.

System action

The copy group is updated and system operation continues.

User response

The copy group will be updated, but the copy group might fail validation when the policy set is validated or activated.

ANR16 18W *Command: the new RETMIN value (new days) is less than the value previously stored (old days) for domain policy set*

management class.

Explanation

Processing for the copy group command *command* detected that the new retain minimum number of days is less than the number of days currently stored for the copy group. The policy set might not activate when archive retention protection is active, because the retain minimum days value is not allowed to decrease.

System action

The copy group is updated and system operation continues.

User response

The copy group will be updated, but the copy group might fail validation when the policy set is validated or activated.

ANR16 19E *The RETVER of NOLIMIT is not allowed with the RETINIT value of EVENT for domain policy set management class.*

Explanation

This message can be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found the the copy group in the policy has specified an invalid combination of options. Retain versions of NOLIMIT and retention

initiation of EVENT are not allowed. The policy will not be validated or activated.

System action

Server operation continues.

User response

Update the RETVER or REINIT values in the copy group.

ANR16 20E *The new RETVER value (new days) is less than the value in the ACTIVE policy (old days) for domain policy set management class.*

Explanation

This message can be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found that archive retention protection is active and the copy group has a retain versions value less than the value in the ACTIVE policy set. The policy will not be validated or activated.

System action

Server operation continues.

User response

Update the RETVER value in the copy group.

ANR16 21E *The new RETMIN value (new days) is less than the*

value in the **ACTIVE** policy (*old days*) for domain policy set management class.

Explanation

This message can be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy set validation processing, the server has found that archive retention protection is active and the the copy group has a retain minimum days value that is less than the value in the ACTIVE policy set. The policy will not be validated or activated.

System action

Server operation continues.

User response

Update the RETMIN value in the copy group.

ANR16 Management class *class name* is not defined in policy set *set name*, but is defined in the active policy set for domain *domain name*. Archive retention protection is active, so validation fails.

Explanation

This message can be returned from the VALIDATE POLICYSET or ACTIVATE POLICYSET command. During policy

set validation processing, the server found a management class named *class name* in the currently active policy set, but not defined in the policy set being validated or activated (*set name*). When archive retention protection is active, all management classes in the active policy set must be included in the policy set being validated. Policy validation will fail.

System action

Server operation continues.

User response

Define a management class with the name specified in the message for the policy set. To define the proper copy group attributes, reference the management class definition in the active policy set or copy the management class *class name* from the active policy set to the policy set *set name*, using the COPY MGMTCLAS command.

ANR16 Management class *class name* in policy set *set name* for domain *domain name* does not have an archive copy group. Archive retention protection is active, so validation fails.

Explanation

This message can be returned from the VALIDATE POLICYSET or

ACTIVATE POLICYSET command. During policy set validation processing, the server found a management class named *class name* in the policy set being validated or activated (*set name*). The management class does not have an archive copy group. When archive retention protection is active, all management classes in the policy set being validated must have an archive copy group. Policy validation will fail.

System action

Server operation continues.

User response

Define an archive copy group in specified management class, then try the validation again.

ANR16 The server database instance does not start and might be downlevel.

Explanation

A database instance update may be required if the server was recently upgraded.

System action

Server initialization stops.

User response

To update the server database instance, log in as an administrator and issue the Db2 DB2IUPDT command.

ANR16 command: 25E Server is down-

level compared to the version of data being inserted into the database: *data version*.

Explanation

The DSMSERV INSERTDB command encountered data written by a version of the DSMUPGRD EXTRACTDB command that is newer than what is supported by the server version.

System action

The command ends without inserting any data into the database.

User response

Rerun the command using a version of the server compatible with the version of DSMUPGRD used to extract the data. Or reextract the data using an older version of DSMUPGRD that is compatible with the version of the server.

ANR16 The previous message (message number *message number*) was repeated *repeat count* times.

Explanation

The message issued prior to this message was issued repeatedly.

System action

The duplicate messages were suppressed.

User response

No action is required.

ANR16 27I The previous message was repeated *repeat count* times.

Explanation

The message issued prior to this message was issued repeatedly.

System action

The duplicate messages were suppressed.

User response

No action is required.

ANR16 28I The database manager is using port *port number* for server connections.

Explanation

The server configures the database manager environment to use the indicated port for connections from the server. Initially, connections from the server do not use TCP/IP. After the number of connections exceeds a pre-determined threshold, connections are made through TCP/IP to the specified port. If the port is being used by another application, the database manager cannot receive connections from the server after the change to TCP/IP connections is necessary. After this situation occurs, future connections to the database manager might fail.

System action

Server operation continues.

User response

No action is required.

ANR16 29W *command*: This command will result in ending the replication relationship for all nodes that match the pattern *node pattern*. Replication will no longer be performed for the specified node(s).

Explanation

A REMOVE REPLNODE command with prevent the specified nodes from being replicated. The replication relationship is removed for each node. No node data is removed from this or any of the other replication servers.

System action

The system asks whether you wish to continue with the REMOVE REPLNODE command.

User response

To process the REMOVE REPLNODE command, enter 'Y' to continue or 'N' to stop the process.

ANR16 30W *command: node name* is not configured for replication.

Explanation

The node specified in the command is not

configured for replication. A node is configured for replication if the replication state of the node is ENABLED or DISABLED. To determine the replication state, issue the QUERY NODE FORMAT=DETAILED command.

System action

The operation continues but the node is skipped for this operation.

User response

Verify that the nodes specified in the command are configured for replication and try the command again. Nodes may be configured for replication with the UPDATE NODE command.

ANR16 31I *command*: Replication state information for node *node names* have been removed.

Explanation

All replication state information for the specified node has been removed from the database and the node is no longer configured for replication. If the node was a target of a replication operation it may now be used to accept client data.

System action

Server operation continues.

User response

None.

ANR16 32E *command*: Command failed. Replication state information for the specified nodes could not be removed.

Explanation

A REMOVE REPLNODE command failed to complete. The replication state for the specified node is not changed.

System action

Server operation continues.

User response

The server reported a problem running the REMOVE REPLNODE command. See accompanying messages for further information.

ANR16 33E *Command: Node name* is set up for replication and cannot be renamed or removed.

Explanation

You cannot rename or remove a node that is configured for replication from a source server or that is created on a target server as a result of replication.

System action

The requested operation fails.

User response

To rename or remove the node, you must first remove the node from replication by issuing the REMOVE REPLNODE command on the server from which the node is to be removed.

**ANR16 Default
34I replication
server name set
to *server name*.**

Explanation

The name of the default target-replication server was set to the value that was specified with the SET REPLSERVER command. If you did not specify a value with the command, the existing target replication server was removed, and client node data will not be replicated.

System action

None.

User response

None.

**ANR16 The server
35I machine GUID,
machine GUID,
has initialized.**

Explanation

The specified globally unique identifier (GUID) has initialized for the server machine.

System action

Server operation continues.

User response

None.

**ANR16 The server
36W machine GUID
changed: old
value (*old
value*), new
value (*new
value*).**

Explanation

The globally unique identifier (GUID) has changed for the server machine. The old and new values are displayed.

System action

Server operation continues.

User response

None.

**ANR16 Error (error)
37W occurred
initializing the
server machine
GUID.**

Explanation

An error occurred while initializing the server machine globally unique identifier (GUID).

System action

Server operation continues.

User response

Handle problems appropriately. A write error may occur because the server needs root authority to write the GUID. A read error may occur if the server does not have authority to read the GUID. Other error codes are received from the GUID utility.

**ANR16 Error (error)
38W occurred**

initializing the
server machine
GUID. Old value
was *old GUID*.

Explanation

An error occurred while initializing the server machine globally unique identifier (GUID). The old value is displayed.

System action

Server operation continues.

User response

Handle problems appropriately. A write error may occur because the server needs root authority to write the GUID. A read error may occur if the server does not have authority to read the GUID. Other error codes are received from the GUID utility.

**ANR16 Attributes
39I changed for
node
nodeName:
*changed
attribute list*.**

Explanation

The TCP/IP name or address, or the globally unique identifier (GUID) has changed for the specified node. The old and new values are displayed for entries that have changed.

System action

Server operation continues.

User response

None.

**ANR16 There is no data
40E mover defined
for node *node
name*.**

Explanation

To perform the requested operation, the specified node must have an associated data mover defined.

System action

The requested operation fails.

User response

Define a data mover for the node and retry the operation.

**ANR16 command: The
41E node *node name*
has a type that
is not allowed
for this
command.**

Explanation

The node is not the correct type to be used with this command.

System action

The command fails.

User response

Re-run the command with a node of the correct type.

**ANR16 command: The
42E node *node name*
is locked.**

Explanation

The node is locked and cannot be used in this command.

System action

The command fails.

User response

Unlock the node and re-run the command.

ANR16 Command: All 43I file spaces for node *node name*, will be moved.

Explanation

The server will attempt to move data for all the file spaces for the specified node name based on the criteria entered in the MOVE NODEDATA command.

System action

Server moves data for the indicated node.

User response

None.

ANR16 Command: Move 44E node data operation already in progress for storage pool *storage pool*.

Explanation

A command has been issued to move node data for the specified storage pool but there is already a move node data operation in progress for one or more nodes that have been specified for that same storage pool.

System action

The server does not process the command.

User response

Check the activity log for a previous MOVE NODEDATA command to determine what processes for moving node data are in progress for the storage pool. Reissue the command for the node(s) and storage pool you desire that are not already in progress, or, reissue the command after the move node data process ends.

ANR16 Command: Data 45I for node *node name*, filesystem *filesystem name*, FSID *filesystem ID* will be moved.

Explanation

The server will move data for the specified filesystem name and node name based on the criteria entered in the MOVE NODEDATA command.

System action

The server moves data for the specified node and filesystems.

User response

None.

ANR16 Command: The 46E datamover type *data mover type* can only be used with a data format of NETAPPDUMP.

Explanation

The data format specified is not valid for a datamover of type *data mover type*.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid parameter value.

ANR16 Cannot find file 47E space name for node *node ID*, file space *file space ID*.

Explanation

The server could not obtain filesystem information for that node.

System action

The server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR16 Command: This 48W command will move data for nodes stored in volumes in storage pool *source storage pool* to other volumes within the same storage pool; the data will be inaccessible to users until the

operation completes.

Explanation

A MOVE NODEDATA command has been entered that will move data to other volumes in the same storage pool. While the data is being moved, it will not be available to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue or 'N' to end the process.

ANR16 Command: This 49W command will move data for nodes stored in storage pool *source storage pool* to storage pool *destination storage pool*; the data will be inaccessible to users until the operation completes.

Explanation

A MOVE NODEDATA command has been entered that will move data from the source storage pool to the destination storage pool shown. While the data is being moved it, will not be available to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue or 'N' to end the process.

ANR16 The server 50W process *process ID* detected partially replicated data from a previous replication operation. This might result in extended processing time while the server is replicating node *node name*, file space *file spacename*.

Explanation

While preparing to begin replication for the specified node, the server found partially replicated data from a previous replication operation. The server must resend replicated data from the previous operation before starting replication for the specified node, so it might take longer to complete processing.

System action

None.

User response

To determine why the previous replication operation failed, issue the QUERY ACTLOG command to view the activity log. If possible, resolve any issues that caused the previous replication operation to fail. Monitor the replication operation to ensure that it is successful. If replication fails again,

investigate the cause by issuing the QUERY REPLFAILURES command before replication runs again.

ANR16 Server 51E information for *server name* is not available.

Explanation

The information for *server name* was not available.

System action

The current server action fails.

User response

Please review any other messages prior to this message to determine the cause of the failure.

ANR16 Replication 52E failed. Total number unresolved extents is .

Explanation

Replication process failed to resolve all extents being replicated.

System action

The current replcation failed.

User response

Please review any other messages prior to this message to determine the cause of the failure.

ANR16 Resource lock 53E acquisition for *server server name* failed.

Explanation

The acquisition of the resource lock for *server server name* failed.

System action

The current action for the device class referring to this server fails.

User response

Retry the action referring to the device class that refers to this *server name*. If the lock failure persists, please contact your service representative.

ANR16 Server server 54E *name* will not be written to a device configuration file.

Explanation

An error occurred accessing the information for *server name* while trying to write this information to a device configuration file.

System action

This DEFINE SERVER entry is not processing.

User response

Verify that the necessary DEFINE SERVER entries were written to a device configuration file. If this error persists, please contact your service representative.

ANR16 Failure writing 56E server definitions to a device configuration file.

Explanation

An error occurred writing the server information to a device configuration file.

System action

The BACKUP DEVCONFIG action fails.

User response

Check that the device configuration file exists and that the file system the file resides on is not out of space.

ANR16 Command: 57E Invalid *server or group name - server or group name*.

Explanation

The command shown specifies an invalid *server* or *server group name*.

System action

The server does not process the command.

User response

Reissue the command with a valid name.

ANR16 command: This 58W command will result in ending the replication relationship with *server server name* for all nodes that match the pattern *node pattern*. Replication will no longer be performed for the specified node(s) if no other replication

server associates with them.

Explanation

A REMOVE REPLMODE command with prevent the specified nodes from being replicated. The replication relationship is removed for each node. No node data is removed from this or any of the other replication servers.

System action

The system asks whether you wish to continue with the REMOVE REPLNODE command.

User response

To process the REMOVE REPLNODE command, enter 'Y' to continue or 'N' to stop the process.

ANR16 Command:
59E Server or server group server or group name is already defined.

Explanation

A DEFINE SERVER or DEFINE SERVERGROUP command has been entered that specifies a server or server group name that already exists. The name specified must be a unique name. It must not duplicate a node name used by a registered node, a server name used by a defined server, or a server group name used by a defined server group.

System action

The server does not process the command.

User response

To define the server or server group, reissue the command and specify a different name.

ANR16 Server server 60I name defined successfully.

Explanation

The requested server has been defined to the system in response to a DEFINE SERVER command.

System action

None.

User response

None.

ANR16 Server server 61I name deleted.

Explanation

In response to a DELETE SERVER command, the requested server has been removed from the system.

System action

None.

User response

None.

ANR16 Server server 62I name updated.

Explanation

One or more attributes of a server have been updated by an UPDATE SERVER command.

System action

None.

User response

None.

ANR16 command:
63E Server server name not defined

Explanation

The server *server name* is not defined to the system.

System action

The command fails.

User response

None.

ANR16 Command:
64W Server server name is currently in use.

Explanation

The command shown specifies a server that is currently in use for one or more of the following purposes:

- The server is referenced by a device class of DEVTYPE=SERVER that specifies this server for the 'SERVERNAME=' parameter.
- The server is defined as the target replication server.
- A connection with this server is currently open.

System action

The server does not process the command.

User response

Reissue the command at a later time. In order to delete the server specified, it must not be currently connected, it

must not be referenced in a device class, and it must not be defined as the target replication server.

ANR16 command:
66E FILEAGGR not allowed with TYPE=SERVER.

Explanation

The FILEAGGR= parameter may not be specified with the TYPE=SERVER parameter also being specified.

System action

The command fails.

User response

Reissue the command without the FILEAGGR= parameter if this node is of type SERVER.

ANR16 command:
67E Action not permitted against node node name.

Explanation

The command is not permitted against the entry for node *node name*. This node entry has a type of SERVER.

System action

The command fails.

User response

None.

ANR16 command: Not 68E allowed for server server name.

Explanation

The DELETE SERVER command is not permitted for server *server name*. The specified server is either the event server or else it is a node entry rather than a server definition.

System action

The command fails.

User response

If the specified server is the event server, and you want to delete it, issue the DELETE EVENTSERVER command and then reissue the DELETE SERVER command. To remove a node entry, issue the REMOVE NODE command for the specified name.

ANR16 Server event 69I *server name* is defined as the event server.

Explanation

The specified server is defined.

System action

None.

User response

None.

ANR16 Server event 70E *server name* is already defined as the event server. You must issue the DELETE EVENTSERVER command before defining

a new event server.

Explanation

An event server is already defined.

System action

The command fails.

User response

Delete the existing Event Server and try the command again.

ANR16 The event 71I server definition has been deleted.

Explanation

The event server definition has been deleted.

System action

None.

User response

If an event server definition is desired, use the DEFINE EVENTSERVER command.

ANR16 No event server 72I is currently defined.

Explanation

A query was issued to get the name of the event server; however, no event server is currently defined.

System action

None.

User response

If an event server definition is desired, use the DEFINE EVENTSERVER command.

ANR16 Server group 73I *group name* defined successfully.

Explanation

The requested server group is defined to the system in response to a DEFINE SERVERGROUP command.

System action

None.

User response

None.

ANR16 Member 74I *member name* defined successfully in server group *group name*.

Explanation

The requested member is defined in the server group in response to a DEFINE GRPMEMBER command.

System action

None.

User response

None.

ANR16 Server group 75I *server group name* deleted.

Explanation

The requested server is removed from the

system in response to a DELETE SERVERGROUP command.

System action

None.

User response

None.

ANR16 Member 76I *member name* deleted from server group *server group name*.

Explanation

The requested member is removed from the server group in response to a DELETE GRPMEMBER command,

System action

None.

User response

None.

ANR16 Server group 77I *server group name* updated.

Explanation

One or more attributes of a server group is updated by an UPDATE SERVERGROUP command.

System action

None.

User response

None.

ANR16 Server group 78I *original server group name* renamed *new*

server group name.

Explanation

A server group is renamed by a RENAME SERVERGROUP command. The original name is not valid.

System action

None.

User response

None.

ANR16 Command:
79E Server group
server group
name not
defined.

Explanation

The server *server group name* is not defined to the system.

System action

The command fails.

User response

Retry the command specifying an existing group.

ANR16 Command:
80E Member
member name
not defined in
server group
server group
name.

Explanation

The member *member name* is not defined in server group *server group name*.

System action

The command fails.

User response

Retry the command specifying an existing member of the group.

ANR16 Command:
81E Member
member name is
already in
server group
server group
name.

Explanation

The member *member name* is defined in server group *server group name*.

System action

The command fails.

User response

Retry the command and specify a new member name.

ANR16 A group cannot
82E be a member of
itself.

Explanation

The member and group name are the same. A group may not be a member of itself.

System action

The command fails.

User response

Retry the command and specify another member name.

ANR16 Command:
83E Member
member name
not defined.

Explanation

The member *member name* is not defined to the system. Server group members must be a defined server or server group.

System action

The command fails.

User response

Retry the command specifying existing server or group.

ANR16 Route:command
84E : Routed
commands
cannot be
routed.

Explanation

The command part of a routed command may not contain route information itself. The allowable syntax for routed commands is "route : command". The command may not contain route information. Only one level of routing is allowed.

System action

The command is not processed.

User response

Reissue the command without specifying route information in the command portion of this routed command.

ANR16 Server group
85I server group
copied to server
group new
server group.

Explanation

This message is displayed in response to the COPY SERVERGROUP command. The server group named *server group* is copied to the server group named *new server group*.

System action

None.

User response

None.

ANR16 Member
86I member name
moved from
server group
group name to
server group
new group
name.

Explanation

The requested member *member name* is moved from server group *group name* to the server group *new server group* in response to a MOVE GRPMEMBER command.

System action

None.

User response

None.

ANR16 Output for
87I command
'command'
issued against
server server
name follows:

Explanation

The output for the command issued against the indicated server follows this message.

System action

None.

User response

None.

ANR16 88I Output for command '*command*' issued against server *server name* completed.

Explanation

This message marks the end of the output for the command specified that was issued against the indicated server.

System action

None.

User response

None.

ANR16 89E Output for command '*command*' issued against server *server name* terminated.

Explanation

An error condition occurred causing the output for the command issued against the specified server to be terminated.

System action

None.

User response

Retry the command against the requested server once the error condition has been

resolved. If the cause of the error can not be determined, please contact your local service representative.

ANR16 90E Error sending command '*command*' to server *server name*.

Explanation

An error was encountered sending the specified command to the server indicated.

System action

None.

User response

Retry the command against the requested server once the error condition has been resolved. If the cause of the error can not be determined, please contact your local service representative.

ANR16 91E Error receiving response from server *server name* for command '*command*'.

Explanation

An error was encountered receiving the response from the server indicated for the command that was issued against it.

System action

None.

User response

Retry the command against the requested server once the error

condition has been resolved. If the cause of the error can not be determined, please contact your local service representative.

ANR16 92E Response for command '*command*' from server *server name* contains invalid data.

Explanation

The output returned from the specified server for the command that was issued, contains invalid output. The command response can not be processed.

System action

Output processing for this command response terminates.

User response

Please contact your local service representative.

ANR16 93E Unable to issue command '*command*' against server *server name* - failure starting thread.

Explanation

A thread could not be started to issue the specified command against the server indicated.

System action

This command is not issued against the server specified. The process will attempt to issue the command against any other servers

that were specified for the command routing information.

User response

Examine the server messages issued prior to this message to determine the source of the error. Retry routing this command to the indicated server after the cause of the error has been determined and resolved. If the error cannot be isolated and resolved, contact your service representative.

ANR16 94I Server *server name* received the request to process command '*command*'.

Explanation

The specified server received and processed the command. If command approval is enabled on the specified server, the command might be queued and pending approval.

System action

None.

User response

If command approval is enabled on the specified server, view the status of the command by using the QUERY PENDINGCMD command. For example, issue the following command on the specified server: query pendingcmd f=d type=all.

ANR16 95W Server *server name* processed command

'command' but completed with warnings.

Explanation

The server indicated processed the command but encountered warnings. However, the warnings did not prevent the execution of the command.

System action

None.

User response

None.

ANR16 Server server 96E *name attempted to process command 'command' but encountered errors.*

Explanation

The server indicated processed the command but encountered errors. These errors prevented the successful completion of the command.

System action

None.

User response

Examine any error messages issued on either the server sending the command or else the server executing the command to determine the cause of the failure. Reissue the command once these errors are corrected.

ANR16 Command 97I *'command'*

processed by total number for servers server(s): number of successful servers successful, number of servers with warnings with warnings, and number of servers with errors with errors.

Explanation

The indicated command was processed by the number of servers specified. For the total number of servers, the number indicated were successful, the number indicated encountered a warning condition but processed anyway, and finally, the number indicated encountered errors and could not process.

System action

None.

User response

None.

ANR16 Command 98I *'command' was not issued against any other servers.*

Explanation

The indicated command was not issued against any other server. Either the routing information did not resolve to any valid servers or else failures occurred issuing

the command against the required servers.

System action

None.

User response

Check to see that valid route information was provided for the command or else check the activity log for error messages that indicate why the command was not issued to the other servers.

ANR16 Resolved route 99I *information to number of servers server(s) - issuing command command against server(s).*

Explanation

The route information was resolved to the number of servers indicated. The specified command will be issued against those servers.

System action

None.

User response

None.

ANR17 Unable to 00E *resolve 'route information' to any server(s).*

Explanation

The route information provided for this command did not resolve to any server names or group names. Because of

this, the command will not be issued.

System action

None.

User response

Examine the route information provided. Reissue the command providing correct route information.

ANR17 Command: No 01E *matching servers defined.*

Explanation

No matching servers are found for the specified command.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify different servers.

ANR17 Skipping 'server 02W *name' - unable to resolve to a valid server name.*

Explanation

The server name specified is being skipped because it could not be resolved to a valid server name.

System action

None.

User response

Reissue the command providing the correct server name.

ANR17 Failure resolving 03E server names.

Explanation

An error occurred while resolving the server names. Specifically, the resolution of the server names has terminated because of a significant failure.

System action

None.

User response

Check the activity log and server console for other messages about the cause of the failure. Once the cause has been resolved, reissue the command.

ANR17 Failure 04E obtaining or using credentials for administrator admin name.

Explanation

An error occurred obtaining or using the credentials for the administrator referenced.

System action

Command processing fails.

User response

If the administrator SERVER_CONSOLE was being used for a PING or VALIDATE LANFREE command,

the command may fail. The administrator SERVER_CONSOLE is not able to perform these commands where the source server, the target server, or both servers have authentication enabled. Another way in which credentials could not be used is in configuration by the Operations Center. The command should be retried using an administrator other than SERVER_CONSOLE.

Check the activity log and server console for other messages about the cause of the failure. Once the cause has been resolved, reissue the command.

ANR17 A ping request 05W to server 'server name' was not able to establish a connection by using administrator credentials.

Explanation

The failure could indicate a problem on the source or target server, or in the connection between the servers.

System action

No connection was established.

User response

To identify and resolve the issue, complete the following steps: 1. Check the activity log and server console for messages that indicate a failure or problem on the source server. 2. Check the communication

connection between the servers. 3. Verify the administrator definition and password on both servers. 4. Verify that the target server is running. 5. Correct any identified issues.

ANR17 A ping request 06I to server 'server name' was able to establish a connection by using administrator credentials.

Explanation

The administrator credentials are valid.

System action

The connection was established.

User response

No action is required.

ANR17 Server 07E information not complete, crossdefine not allowed.

Explanation

The SERVERHLADDRESS, SERVERLLADDRESS or SERVERPASSWORD has not been set for this server. These are required for the CROSSDEFINE option on the define server command.

System action

The command fails.

User response

Use the QUERY STATUS command to find what values need to be set. An authorized administrator

must issue the SET SERVERHLADDRESS, SET and SERVERLLADDRESS or SET SERVERPASSWORD command to set the missing values.

ANR17 Define server 08I for server name failed because the crossdefine failed.

Explanation

The DEFINE SERVER command failed because the CROSSDEFINE parameter was included, and the crossdefine was not successful. This message might be issued when the CROSSDEFINE attribute for a server is set to OFF. Alternatively, this message might be issued as the result of an explicit command or an automatic definition for a storage agent-to-server connection.

System action

The command fails.

User response

Check this server and the server that is being defined for other messages that indicate the reason for the failure. Check the crossdefine parameter settings by issuing the QUERY STATUS command. If crossdefine is set to OFF, it can be changed by using the SET CROSSDEFINE ON command. Check the communication connection between the servers. Use the SET SERVER servername SERVERPASSWORD

parameter to reset the password in the server definition on both servers.

ANR17 Command.: 09E Failure determining current usage for server or group name Server name.

Explanation

The specified command failed to determine the current use of the server name or server group specified.

System action

The command fails.

User response

Retry the command. If it continues to fail and the cause of the failure can not be determined, please contact your local service representative.

ANR17 Command.: 10E Name Name not valid for this command.

Explanation

The name specified for this command is not valid for this operation. The first case is that a server name was specified for a command requiring a server group name. The other case is where a server group name was specified for a command requiring a server name.

System action

The command fails.

User response

Retry the command specifying the proper name.

ANR17 Error accessing 11E the server or server group name Name.

Explanation

A server operation attempted to access the server name or server group name specified. An error occurred while trying to access the information for this server name or server group name.

System action

The server operation fails.

User response

Review the activity log to try to determine the cause of the failure. If a cause can not be determined, please contact your local service representative.

ANR17 Command 12W routing not allowed from server console.

Explanation

Command routing is not allowed from the server console.

System action

The command is not executed.

User response

Reissue the command from an Administrative client.

ANR17 Command 13I 'command' issued against server server name.

Explanation

The specified command has been sent to the indicated server. The command is to terminate the specified server, no confirmation will be received.

System action

None.

User response

None.

ANR17 The password 14W for administrator administartor name has expired. The password for this administrator must be updated on the configuration manager server server name.

Explanation

The password for the named administrator has expired, but the administrator is a managed object on this server. The password must be updated on the named configuration manager server.

System action

The operation requires a password update.

User response

Change the administrator's password on the named configuration manager server.

ANR17 Event server 15E cannot be deleted - it is currently active.

Explanation

The event server cannot be deleted since it is currently active for event logging.

System action

The server does not delete the event server entry.

User response

In order to delete the event server, it must not be currently active for event logging. To stop event logging to the event server issue END EVENTLOGGING EVENTSERVER. Then reissue the DELETE EVENTSERVER command.

ANR17 Server cannot 16I be crossdefined to itself, crossdefine not allowed.

Explanation

An attempt was made to crossdefine the server to itself.

System action

The command fails.

User response

None.

ANR17 17E Command:
Command failed
- Non-
Compatible
Filespace name
types have been
specified.

Explanation

A server command has been entered but cannot be processed because Non-Compatible Filespace name types have been specified.

System action

The server does not process the command.

User response

Specify compatible filespace names. Unicode to Unicode or Non-Unicode to Non-Unicode.

ANR17 18E Command:
Reconstruction
of file
aggregates is
supported only
for movement in
which the
source and
target storage
pools are
sequential-
access.

Explanation

The indicated command specifies that file aggregates be reconstructed during a move operation for which reconstruction is not supported. Aggregates are reconstructed only when both the source storage pool and the target storage pool are sequential-access.

System action

The server does not process the command.

User response

Reissue the command without specifying that aggregates should be reconstructed. Alternatively, specify a move operation involving transfer of data within a sequential-access storage pool or between two sequential-access storage pools.

ANR17 19E Storage pool
storage pool
name specified
on the MOVE
NODEDATA
command is not
a valid pool
name or pool
type.

Explanation

If the source storage pool specified in the command is a primary storage pool, then the destination storage pool specified must also be a primary storage pool. If the source storage pool is a copy storage pool, then the specified destination storage pool must be the same storage pool as the source storage pool.

System action

The MOVE NODEDATA process fails.

User response

Provide a valid primary storage pool name as the destination storage pool if the source pool is a primary storage pool. If the source pool is

a copy storage pool do not specify a destination pool, or, specify the same copy storage pool as the destination pool.

ANR17 20I A path from
source name to
destination
name has been
defined.

Explanation

In response to the DEFINE PATH command, the path from the source name to the destination name has been defined in the server database.

System action

Server operation continues.

User response

None.

ANR17 21I A path from
source name to
destination
name has been
deleted.

Explanation

In response to the DELETE PATH command or to an UPDATE DEVCLASS command with the MOUNTLIMIT parameter, the path from the source name to the destination name has been deleted in the server database.

System action

Server operation continues.

User response

None.

ANR17 22I A path from
source name to
destination
name has been
updated.

Explanation

In response to the UPDATE PATH command, the path from the source name to the destination name has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR17 23E A path is
already defined
using source
name and
destination
name.

Explanation

In response to the DEFINE PATH command, the server determines that a path with the same source name and the same destination name already exists in the server database.

System action

Server operation continues.

User response

Correct the source name or destination name and re-enter this command.

ANR17 24W Command:
Server server
name is
currently in use.

Explanation

The command shown specifies a server that is currently in use. The server is referenced in a PATH used for LANFree access to a FILE device type drive in a shared library.

System action

The server does not process the command.

User response

Reissue the command at a later time. In order to delete the server specified, it must not be currently connected to the server, it may not be referenced in a device class, it can not be defined to be the event server, and it cannot be referenced within a PATH definition as a FILE device type drive.

ANR17 25E The source or destination name *name* is invalid and the command *command* failed.

Explanation

The source or destination name is invalid in the DEFINE PATH, DELETE PATH, or PERFORM LIBACTION command.

System action

Server operations continue.

User response

Issue the command again with a valid source or destination name.

ANR17 26E A operation using the path from *sourcename* to *destname* is currently being used.

Explanation

This path was in use when the command was entered. The attributes of a path may not be changed while it is being used.

System action

The server ignores the command.

User response

Wait until the operation using this path is complete, or cancel the operation using this path, and then reissue the command.

ANR17 27E A path from *sourcename* to *destname* does not exist.

Explanation

The path being updated or deleted does not exist.

System action

The server ignores the command.

User response

Reissue the command with a different source or destination name or define a new path.

ANR17 28E The library *libname* is not a SCSI or VTL library.

Explanation

A drive that is to be used by a NAS data mover must be attached to a SCSI or VTL library.

System action

The server ignores the command.

User response

Reissue the command with a different drive name.

ANR17 29E A path using the data mover *source name* still exists.

Explanation

In the DELETE DATAMOVER command, the data mover name supplied is either the source or the destination in a path that still exists in the server database.

System action

Server operation continues.

User response

Delete the existing path and reissue this command.

ANR17 30I Data mover *mover name* has been defined.

Explanation

The data mover has been defined in the server database.

System action

Server operation continues.

User response

None.

ANR17 31I Data mover *mover name* has been deleted.

Explanation

The data mover has been deleted in the server database.

System action

Server operation continues.

User response

None.

ANR17 32I Data mover *mover name* has been updated.

Explanation

The data mover has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR17 33E Data mover *mover name* is already defined.

Explanation

A DEFINE DATAMOVER command was entered for a data mover that already exists in the server database.

System action

Server operation continues.

User response

Use the UPDATE DATAMOVER to change the attributes in this data mover. Otherwise use a different data mover name.

ANR17 Data mover 34E *mover name is not defined.*

Explanation

An UPDATE DATAMOVER command was entered for a data mover that does not exist in the server database.

System action

Server operation continues.

User response

Correct the data mover name or use the DEFINE DATAMOVER command to define a new data mover.

ANR17 Data mover data 35E *mover is currently being used.*

Explanation

A data mover was in use when the command was entered. The attributes of a data mover may not be changed while it is being used.

System action

The server ignores the command.

User response

Wait until the operation using this data mover is complete, or cancel the operation using this data

mover, and then reissue the command.

ANR17 Command: 36E *Parameter parameter length is invalid.*

Explanation

The specified server command has been entered with a parameter that is longer or smaller in length than the allowed length.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR17 Command: 37E *Device name device specified is invalid.*

Explanation

The specified command has been entered with an invalid device name.

System action

The command failed.

User response

Reissue the command with a valid device name.

ANR17 The database 38W *backup does not contain a copy of the server master encryption key. The server master encryption key will not be restored.*

Explanation

This databackup backup was completed in a server level that does not support encryption.

System action

The command continues.

User response

None

ANR17 The database 39E *backup contains a copy of the server master encryption key but no password was provided.*

Explanation

To restore the server master encryption key, a password must be specified on the DSMSEV RESTORE DB command.

System action

The command fails.

User response

ToRestore the server master encryption key, specify a password on the DSMSEV RESTORE DB command. If you do not want to restore the master encryption key, you must specify the RESTOREKeys=No value.

ANR17 The database 40W *backup does not contain a copy of the server master encryption key. The server master encryption key will not be restored.*

Explanation

The server master encryption key was not stored when the database was backed up.

System action

The command continues.

User response

To store a copy of the server master encryption key during database backup, you must specify the PROTECTKEYS and PASSWORD parameters on the SET DBRECOVERY or BACKUP DB command.

ANR17 The server 41E *master encryption key in the database backup cannot be read. The password might be incorrect, or the encryption key might be invalid.*

Explanation

The server master encryption key stored in the database backup cannot be read. To access the master encryption key, a password is required. If the password is incorrect, the master encryption key cannot be accessed. If the password is correct, the master encryption key is not being read properly.

System action

The command fails.

User response

Verify that the password is correct and retry

the command. If the password is correct, you can skip restoring the master encryption key. To skip restoring the master encryption key, you must specify the RESTOREKeys=No value on the DSMSEV RESTORE DB command. Warning: If you skip restoring the master encryption key, you will be unable to retrieve data stored in any encrypted storage pool, and no new data will be allowed to be stored in any encrypted storage pool.

ANR17 The server 42I master encryption key was restored successfully.

Explanation

The server master encryption key was restored to the server password file.

System action

N/A

User response

None

ANR17 The parm 43E parameters are required to be enabled when PASSWORD is specified.

Explanation

The PASSWORD parameter is only used when the specified parameter has an enabled value.

System action

The command fails.

User response

Remove the PASSWORD parameter or enable the keys parameter. To enable the keys parameter for the SET DB RECOVERY or BACKUP DB commands, set the PROTECTKEYS parameter to YES. To enable the keys parameter for the DSMSEV RESTORE DB utility, set the RESTOREKEYS parameter to YES or ONLY.

ANR17 The world wide 44E name is invalid for the destination of the path being defined.

Explanation

A path was being defined from a datamover to a destination and that destination has an incorrect world wide name specified.

System action

Server operation continues.

User response

Update the destination's definition with the correct world wide name.

ANR17 The HBA is busy 45I and SAN devices cannot be discovered.

Explanation

The SAN device discovery function is busy. The requested HBA API query cannot be completed at this time. This type of timeout is generally caused by a bad HBA

adapter in a system with multiple HBAs.

System action

Server operations continue.

User response

Check all HBA adapters on the system and ensure that all of them are functioning correctly. Reissue the QUERY SAN command.

ANR17 The path from 46E data mover *datamover name* to drive *library name drive name* is not online.

Explanation

A server-free operation requested the specified device. The device cannot be used because the path from the datamover to the device is not online.

System action

Server operation continues.

User response

Determine the reason for the path being offline; if possible, update the path status to online.

ANR17 The library 47E *libname* is not a ZOSMEDIA enabled library.

Explanation

Defining a PATH to a library using the ZOSMEDIASERVER parameter requires the library be a ZOSMEDIA library (e.g.,

DEFINE LIB libname LIBTYPE=ZOSMEDIA).

System action

The server ignores the command.

User response

Reissue the command with the correct library name.

ANR17 The PASSWORD 48E parameter is required when *parm* is enabled.

Explanation

The PASSWORD parameter is required when the specified parameter has an enabled value.

System action

The command fails.

User response

Add the PASSWORD parameter or disable the keys parameter. To disable the keys parameter for the SET DB RECOVERY or BACKUP DB commands, set the PROTECTKEYS parameter to NO. To disable the keys parameter for the DSMSEV RESTORE DB utility, set the RESTOREKEYS parameter to NO.

ANR17 The drive library 49W *name drive name* was not found on the SAN. The path definition for this drive has been marked offline.

Explanation

During device discovery on a storage area network a device was not found that has the same serial number as the drive defined to IBM Storage Protect.

System action

Server operation continues.

User response

Verify that the serial number of the drive definition is correct and that the drive is operational.

ANR17 The server 50E detected an internal error, return code = return code.

Explanation

An unexpected error occurred during server operation.

System action

Server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If the failure can be found and resolved, retry the operation. If the failure cannot be found, contact your service representative for assistance in resolving the problem.

ANR17 The Command 53E cannot be

issued because domain name is an object domain.

Explanation

The command issued does not support object domains and so cannot be issued to process policy domains that are defined as object domains.

System action

System operation continues, but the server does not process the command. Database changes for the command are rolled back.

User response

To resolve the issue, take one of the following actions:

- Define a policy domain as an object domain by issuing the DEFINE OBJECTDOMAIN command. The defined object domain contains policy sets, management classes, and copy groups.
- Update an object domain by issuing the UPDATE OBJECTDOMAIN command.

ANR17 The command 54E failed because the parameter parameter was specified, but the PROMPT=YES parameter value was also specified or was retained as the default setting.

Explanation

The parameter cannot be specified along with the PROMPT=YES parameter value.

System action

System operation continues, but the command fails.

User response

Reissue the command without specifying the parameter. Then, enter the password at the prompt.

Attention: Alternatively, you can enter the password on the command line, but you increase the risk that the password might be accessed by unauthorized users. If you enter the password on the command line, you must specify the PROMPT=NO parameter value, or the command fails.

ANR17 You must 55I manually restore the following master encryption key files: dsmkeydb.kdb and dsmkeydb.sth.

Explanation

When a password is not specified during a database restore operation, the master encryption key files that are indicated in the message must be manually restored. Full server function is not available without those files.

System action

Restore processing continues.

User response

To restore the indicated files, reissue the command without specifying the PASSWORD parameter. Then, enter the password at the prompt. If you choose to enter the password on the command line, you must specify the PROMPT=NO parameter value along with the PASSWORD parameter.

Attention: If you enter the password on the command line, you increase the risk that the password might be accessed by unauthorized users. The preferred method is to issue the command without specifying the PASSWORD parameter. Alternatively, if the files were saved separately, restore them from the alternate location.

ANR17 Command: The 56E command failed because the volumes are not in a cloud-based retention storage pool.

Explanation

This command is only valid for volumes in a cloud-based retention storage pool, but the storage pool that the volumes were found in was either not cloud-based, or not a retention storage pool.

System action

The server does not process the command.

User response

For volumes on a storage pool which is not a cloud-based retention storage pool, there is no need to issue this command, so no further action is needed.

ANR17 57E *Command: The command failed. You cannot use the RETRIEVALTYPE parameter with the cloud provider that you specified in the cloud connection.*

Explanation

The cloud provider does not use the RETRIEVALTYPE parameter.

System action

The server does not process the command.

User response

Do not specify the RETRIEVALTYPE parameter for the command.

ANR17 58I *Repaired extents damaged extents in directory container pools.*

Explanation

The server repaired the specified number of extents.

System action

Server operation continues.

User response

None.

ANR17 59E *Command: A device with SCSI datamover capabilities was not found in the system configuration for datamover name.*

Explanation

The scsi address could not be determined for a device that is capable of performing datamover operations.

System action

The requested operation fails.

User response

Verify that the hardware that can perform SCSI datamover operations is installed and powered on.

ANR17 60E *Command: Command failed for node node name, file space file space name - destination storage pool storage pool was skipped.*

Explanation

The indicated command failed because the destination storage pool was skipped. A storage pool may be skipped because it does not have enough available space,

or because it has a MAXSIZE value that is less than the size of the object to be inserted.

System action

The operation fails.

User response

Ensure that the destination storage pool is available, has an adequate MAXSIZE setting, and has adequate space. The MAXSIZE setting may be changed using the UPDATE STGPPOOL command. Space may be added to the storage pool by checking in scratch volumes or defining new volumes in the storage pool. If volumes in the destination storage pool are offline, use the VARY ONLINE command to vary them online and make them available for use. Correct the problem and reissue the command.

ANR17 61E *Command: Command failed for node node name, file space file space name - storage media is inaccessible.*

Explanation

The indicated command failed because required storage media is unavailable.

System action

The operation fails.

User response

Ensure that there are sufficient volumes available for storing

backups and that any volumes required for restore are checked in and available. Correct the problem and try the command again.

ANR17 62E *Command: Command failed for node node name, file space file space name - mount point unavailable.*

Explanation

The indicated command failed because sufficient mount points are not available.

System action

The operation fails.

User response

Ensure that sufficient mount points are available and working correctly. Correct the problem and try the command again.

ANR17 63E *Command: Command failed - see previous error messages or view the activity log.*

Explanation

The indicated server command has failed. This message is always preceded by one or more other error messages which provide more detail about why the command failed.

System action

The operation fails.

User response

Examine the previous error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the problem and try the command again.

ANR17 Command: 64E Command failed - loadable module module name is not available.

Explanation

The indicated server command has failed because it requires the availability of the specified loadable module, but the module is not loaded.

System action

The operation fails.

User response

Make sure the necessary loadable module is available for your platform. Not all modules are available on all platforms. If the module is available for your platform and is installed, contact your service representative for assistance.

ANR17 Command: The 65E number of copy threads entered, copythreads, exceed the capabilities of the datamover.

Explanation

A datamover has an upper limit of the number of copy threads that it is capable of executing. The copythreads parameter provided is greater than this limit.

System action

The command fails.

User response

Make sure the value entered for the copythreads parameter is less than the maximum for this datamover. Using the default for the number of copythreads sets the number of copythreads to the datamover's maximum value.

ANR17 Command: NAS 66E device datamover reports a drive affinity for drive tape drive that does not match this data mover.

Explanation

A NAS device returned an affinity identifier for a tape drive that does not match the recorded affinity identifier for the data mover.

System action

The command fails.

User response

Check the High Level Address for the data mover and verify that it is a node management network interface on the NAS cluster. Verify that

the interface is located on the appropriate node cluster.

ANR17 Process process 67I number for NAS node node name will use NAS data mover datamover

Explanation

An alternate NAS data mover was selected for the current NAS operation.

System action

The NAS operation continues.

User response

None.

ANR17 Command: The 68E device name provided conflicts with a device name that is already in use.

Explanation

The device name provided in the command is already used by an existing path.

System action

The command is not processed.

User response

Specify a valid DEVICE parameter that is not used by any other drive or library.

ANR17 Command: 69E Command failed - multiple actions between

commit actions not allowed.

Explanation

A server script that performs multiple actions between commit actions is not allowed. For example, deletion of multiple paths before each of the deletions is committed is not allowed.

System action

The server does not process the command.

User response

Rewrite the script or macro so that no new command is issued until the previous command is committed.

ANR17 Processing for 70E session session id found destination new destination. Expected current destination.

Explanation

While processing a remote image operation, the specified session was working with the current destination. But the server received a client request with a new destination name.

System action

Server operation continues.

User response

From the client, quit the current remote image request. Reissue the request, if desired.

ANR17 71E The path from remote server *remote server name* to destination *destination name* with the destination *device type* is not valid.

Explanation

The library manager receives a command to update the path for the remote server. The device type field of the destination device is not valid. The destination for update path from remote server must be either drive or library.

System action

Server operation continues.

User response

Determine why the device type field of the destination device is not valid.

ANR17 72E The path from source *source name* to destination *drive name* is taken offline.

Explanation

The path is now marked offline.

System action

The path is inaccessible.

User response

Determine the reason the path is inaccessible, such as a hardware problem. Make any

needed corrections. Then, issue the the UPDATE PATH command with the ONLINE=YES option to make the path online.

ANR17 73W Unable to update the path in the database *path source name* and drive *drive name* .

Explanation

The system is unable to update the path information in the database table.

System action

.

User response

None.

ANR17 74E The Query Status command failed, and server initialization has not completed. Allow server initialization to complete, and then try the command again.

Explanation

The command Query Status failed because server initialization has not completed.

System action

Server operation continues.

User response

Allow server initialization to complete, and then try the command again.

ANR17 75I Data mover *mover name* has been defined, however a connection to the data mover failed. Please check the attributes of the file server specified in the definition of the data mover.

Explanation

The data mover has been defined in the server database, however the server cannot connect to the file server associated with the data mover. The connection failed because of one of the following possible reasons:

- One of the parameters specified during datamover definition was incorrect: TCP/IP address of the file server, user id, password, TCP/IP port
- File server is not accessible
- NDMP server limits the number of opened NDMP sessions

System action

The data mover is defined to the server.

User response

Check that the file server associated with the data mover is accessible through the network; check each of the attributes specified during datamover definition; check the number of open NDMP

sessions with the file server.

ANR17 76I Data mover *mover name* has been updated, however a connection to the data mover failed. Please check the attributes of the file server specified in the update command.

Explanation

The data mover has been updated in the server database, however the server cannot connect to the file server associated with the data mover. The connection failed because of one of the following possible reasons:

- One of the parameters specified during datamover update was incorrect: TCP/IP address of the file server, user id, password, TCP/IP port
- File server is not accessible
- NDMP server limits the number of opened NDMP sessions

System action

The data mover definition is updated.

User response

Check that the file server associated with the data mover is accessible through the network; check each of the attributes specified in the datamover update command; check the

number of open NDMP sessions with the file server.

ANR17 77W *Command: New cluster node on NAS cluster nas cluster is assigned same cluster affinity as cluster node existing cluster node*

Explanation

A NAS cluster device reported a cluster node with a cluster affinity identifier that is the same as an existing data mover.

System action

Server processing continues.

User response

Check the data movers reported in the message and update any existing device paths defined for these data movers based upon the current configuration of the NAS cluster.

ANR17 78E *Command: Invalid or missing parameter.*

Explanation

The specified server command has been entered with an invalid parameter, or, is missing a required parameter.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR17 79I *backupset process name process completed: successful count backupset(s) were generated or defined out of total count backupset(s) requested by the command's specifications.*

Explanation

A GENERATE or DEFINE BACKUPSET command has finished successfully, and the backupsets described in previous messages have been created.

System action

The backupsets described have been created.

User response

None.

ANR17 80I *Command: The network-attached storage (NAS) cluster cluster name has tape devices attached to cluster node cluster node*

Explanation

The server has discovered tape drives attached to a node in a NAS cluster during a DEFINE DATAMOVER or UPDATE DATAMOVER command.

System action

Server processing continues.

User response

None.

ANR17 81I *Command: The network-attached storage (NAS) cluster cluster name requires new data mover, cluster node, for tape drive access.*

Explanation

The server has discovered a node within in a NAS cluster with attached tape drives. A new data mover will be defined to provide access to the attached tape drives.

System action

Server processing continues.

User response

When a datamover is created by the server for node within a cluster you should identify the tape drives attached to the node. Define paths from the new datamover to each drive you want to use for backup of the NAS cluster.

ANR17 82I *Representation al State Transfer (REST) services are starting at time.*

Explanation

After the REST services start, applications that use REST services can

query and manage the storage environment by connecting to the Operations Center.

System action

Server operation continues as the REST services are started.

User response

You can disable the REST services by removing the monitoring administrator. To remove the monitoring administrator, issue the following administrative command: set monitoringadmin ""

ANR17 83I *Representation al State Transfer (REST) services were stopped at time.*

Explanation

After the REST services are stopped, applications that use REST services can no longer query and manage the storage environment by connecting to the Operations Center.

System action

Server operation continues after the REST services are stopped.

User response

Ensure that the server is configured as a hub server. Update the value of the RESTHTTPSPORT option to specify an available port number. For example, issue the SETOPT RESTHTTPSPORT command and specify an

available port number.
Restart the server.

**ANR17 Stopping the
84I activity log
because activity
log retention
has been set to
zero.**

System action

Stopping the activity
log because activity log
retention has been set to
zero.

User response

None.

**ANR17 Representation
85E al State Transfer
(REST) services
were unable to
bind to port port
number.**

Explanation

The REST services were
unable to bind to the
specified port number.

System action

The REST services is
stopped. Server operation
continues.

User response

Issue the QUERY OPTION
command to determine
the port number that
is defined for the
RESTHTTPSPORT server
option. Ensure that the
port that is specified
in the RESTHTTPSPORT
server option is open
for the server to use
and not already in use
by another application.
Update the value of the
RESTHTTPSPORT option
to specify an available
HTTPS port number
by using the SETOPT

RESTHTTPSPORT
command. Then, restart
the server.

**ANR17 HBAAPI not
86W able to get
adapter name.**

Explanation

The HBAAPI function
getAdapterName failed.
The server will continue
to access next adapter if
it exists.

System action

None.

User response

The IBM Storage Protect
SAN discovery will not
work with this Host
Bus Adapter. For the
list of supported HBAs
and required driver levels
by operating system,
see techdoc 1193154
at [http://www.ibm.com/
support/docview.wss?
uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

**ANR17 Unable to open
87W adapter adapter
name.**

Explanation

The HBAAPI function
to open the host bus
adapter (HBA) failed.

System action

None.

User response

The IBM Storage Protect
SAN discovery will not
work with this Host
Bus Adapter. For the
list of supported HBAs
and required driver levels
by operating system,
see techdoc 1193154
at <http://www.ibm.com/>

[support/docview.wss?
uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

**ANR17 Unable to
88W retrieve the
adapter
attributes for
adapter name.**

Explanation

The HBAAPI function
failed to retrieve the
adapter' attributes. This
problem is caused by
a nonfunctional Fibre
Channel adapter on
the system. Check this
adapter to ensure it
works properly. This
problem also can be
caused by other non
Fibre Channel types of
adapters on the system,
such as, a SAS or a
parallel SCSI adapter.
This message can be
ignored if you are using
a non Fibre Channel
adapter.

System action

None.

User response

SAN discovery does
not work for this
adapter. For the list
of supported HBAs and
required driver levels
by operating system,
see techdoc 1193154
at [http://www.ibm.com/
support/docview.wss?
uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

**ANR17 Get HBA target
89W mapping failed.**

Explanation

The HBAAPI function to
get the target mapping
failed.

System action

None.

User response

SAN discovery will
not work for this
adapter. For the list
of supported HBAs and
required driver levels
by operating system,
see techdoc 1193154
at [http://www.ibm.com/
support/docview.wss?
uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

**ANR17 SAN discovery
90W failed.**

Explanation

SAN discovery failed.

System action

None.

User response

SAN discovery failed. This
may be a problem with
the HBA firmware, HBA
or the HBA vendor's
HBAAPI driver. For the
list of supported HBAs
and required driver levels
by operating system,
see techdoc 1193154
at [http://www.ibm.com/
support/docview.wss?
uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

**ANR17 HBAAPI
91W wrapper library
file name failed
to load or is
missing.**

Explanation

This library is provided by
IBM Storage Protect. It is
required for discovery of
devices on a SAN.

- For windows, the
HBAAPI wrapper library
is hbaapi.dll.

- For AIX, the HBAAPI wrapper library is libHBAAPI.a.
- For Solaris, the HBAAPI wrapper library is libhbaapi32.so for 32 bit application and libhbaapi64.so for 64 bit application.
- For Linux, the HBAAPI wrapper library is libhbaapi32.so for 32 bit application and libhbaapi64.so for 64 bit application.

System action

None.

User response

Make sure the HBAAPI wrapper library for this platform is in the same directory as the IBM Storage Protect server executable. AIX is the only exception with HBAAPI wrapper library libHBAAPI.a in /usr/lib.

ANR17 HBAAPI vendor 92W library failed to load or is missing.

Explanation

The HBAAPI vendor library failed to load or is missing. This HBAAPI library is provided by the Host Bus Adapter (HBA) vendor. It is required for IBM Storage Protect server to discover devices on the SAN.

System action

None.

User response

Ensure the HBAAPI file exists on the system. If the driver level on

your system is not supported, go to the HBA vendor's website and download/install the HBA driver. For the list of supported HBAs and required driver levels by operating system, see techdoc 1193154 at <http://www.ibm.com/support/docview.wss?uid=swg21193154>. The following is an example of some of the HBA vendor's HBAAPI file:

- For UNIX systems, This HBAAPI vendor library's location is indicated in /etc/hba.conf. For example:

```
qla2x00          /usr
/lib/libqlsdrm.so

com.emulex.emulexapi
library

/usr/lib/
libemulexhbaapi.so
```

- For Windows systems, verify the location of the HBAAPI vendor library by checking LibraryFile in:

```
HKEY_LOCAL_MACHINE
SOFTWARE
SNIA
HBA

<HBAAPI library>
```

ANR17 IBM Storage 93W Protect SAN discovery is not supported on this platform or this version of OS.

Explanation

SAN discovery for this platform is currently not supported.

System action

None.

User response

SAN discovery will not work for this platform.

- For AIX, we only support AIX5.2F and above
- For HP, we do not support this platform yet.
- For Linux, we do not support Linux-zOS yet.
- For Windows, we do not support Windows 2003 64 bit yet.

For the list of supported HBAs and required driver levels by operating system, see techdoc 1193154 at <http://www.ibm.com/support/docview.wss?uid=swg21193154>.

ANR17 IBM Storage 94W Protect SAN discovery is disabled by options.

Explanation

SAN discovery is disabled by option SANDISCOVERY OFF or SANDISCOVERY UNSCANNEDPATHOFF.

System action

None.

User response

SAN discovery is currently disabled either by default by the SANDISCOVERY OFF option depending on the platform or by the SANDISCOVERY UNSCANNEDPATHOFF option. For the list of supported HBAs and required driver levels by operating system, see techdoc 1193154 at <http://www.ibm.com/>

[support/docview.wss?uid=swg21193154](http://www.ibm.com/support/docview.wss?uid=swg21193154).

ANR17 The device 95I driver has been updated successfully for device old device name. The new device name is new device name.

Explanation

This message is displayed in response to the CHANGE DEVDRIVER command. The device driver for device *old device name* has been updated successfully.

System action

Server operation continues.

User response

None.

ANR17 Invalid device 96E name device name.

Explanation

The device name is not in the form of TAPEX or CHANGERx.

System action

The server fails the command.

User response

Change the device name to TAPEX or CHANGERx and retry the command.

ANR17 Device device 97E name is not supported by the IBM Storage Protect device driver.

Explanation

Device *device name* is not supported by the IBM Storage Protect device driver. The hardware ID was not found in the IBM Storage Protect device driver INF file, i.e. tsmlb.inf and tsmmt.inf.

System action

The server fails the command.

User response

Access the IBM Storage Protect Web site at www.ibm.com/software/sysmgmt/products/support/IBMTivoliStorageManager.html and navigate to the device support information for the server's operating system. Verify if the device is supported. If the device is supported by the IBM Storage Protect device driver, contact your service representative.

ANR17 Device driver 98E update failed for device *device name*.

Explanation

The CHANGE DEVDRIVER operation failed for device *device name*.

System action

The activity that generated this error fails.

User response

None.

ANR17 The IBM Storage 99E Protect device driver is not

installed, or one or more device driver files are missing.

Explanation

The server command has failed because the IBM Storage Protect device driver is not installed, or one or more device driver files are missing.

System action

The operation fails.

User response

Make sure the IBM Storage Protect device driver is installed, and the following files are not missing. %WINDIR%\system32\drivers\tsmscsi.sys (or tsmscsi64.sys for 64-bit Windows), %WINDIR%\inf\tsmmt.inf, and %WINDIR%\inf\tsmlb.inf.

ANR18 Command: No 00W matching file space was found for file space *filepath* name on node *node name*.

Explanation

The server did not find a matching file space name or file space ID for the file space and node that are specified in the command.

System action

The server ends the command.

User response

Enter the command with file space names or file

space IDs that refer to defined file spaces for the specified node. Note that file space names are case sensitive. Enter the file space names by using exactly the same upper- and lowercase characters that match the file space name that is defined on the server. File space name searches are also sensitive to NAMETYPE (SERVER, UNICODE, FSID) and CODETYPE (BOTH, UNICODE, NONUNICODE) parameters. Issue the QUERY FILESPACE command to determine which file spaces and file space IDs are defined for a node on the server.

ANR18 Eventlog 01E command: Invalid event or event class - Event or event class name.

Explanation

An event logging command has been entered which specifies an unknown event or event class.

System action

The command is ignored for the invalid event or event class. Any valid events or classes specified are processed.

User response

Reissue the command with the correct event or event class.

ANR18 Device device 02E name was not found.

Explanation

The device was not found in the device information set. The vendor ID and/or product ID, or device name may be invalid, or the device has been removed from the system.

System action

The activity that generated this error fails.

User response

Reissue the command with the correct vendor ID and product ID, or device name.

ANR18 SAN discovery 03W module *module name* is not installed correctly.

Explanation

The server attempted to load the SAN discovery module, but the permissions or ownership of the file are incorrect.

System action

Server operation continues, but without SAN discovery function.

User response

Ensure that the SAN discovery module is executable, has the setuid bit turned on, and is owned by root. The SAN discovery module is called 'dsmqsan' and must reside in the server or storage agent executable directory.

ANR18 Command: 04W Process process number skipping

volume *volume name* in storage pool *pool name* because the volume is in use by another process.

Explanation

The command shown specifies the volume to be processed, but that volume is currently being used by another operation.

System action

The server skips the volume and processes the next available volume.

User response

Check the activity log to determine which operation was using the volume. If the operation using the volume is complete reissue the *Command* to process the skipped volume.

ANR18 05I This export command does not work with either container or cloud storage pools. Object *Object Name* is skipped.

Explanation

Container storage pools cannot be used for storage pool backup, reclamation, migration, collocation, export, import, or simultaneous-write.

System action

The server skips the object and processes the next available object.

User response

Use another method or storage pool type to store the data.

ANR18 06I Some data is skipped because the operation cannot be completed for container or cloud storage pools.

Explanation

Container or cloud storage pools cannot be used for storage pool backup, reclamation, migration, collocation, export, import, NDMP, generate backupset or simultaneous-write.

System action

The server skips the object and processes the next available object.

User response

Use another method or storage pool type to store the data.

ANR18 07I Table updating statistics performed successfully for *processed table*.

Explanation

Runstat successfully run on that table.

System action

Server operation continues.

User response

No user action required.

ANR18 08I Object *Object ID* is skipped because the operation cannot be completed for cloud storage pools.

Explanation

Cloud storage pools cannot be used for storage pool backup, reclamation, migration, collocation, or simultaneous-write.

System action

The server skips the object and processes the next available object.

User response

Use another method or storage pool type to store the data.

ANR18 09E Insufficient memory to activate event logging.

Explanation

A BEGIN EVENTLOGGING command has been entered, but the server has insufficient memory available to activate logging.

System action

The command is ignored.

User response

If logging is required, make more memory available to the server then restart the server.

ANR18 10E Eventlog command: Invalid receiver - *receiverName*.

Explanation

An event logging command has been entered which specifies an unknown event log receiver (maybe unknown just to this platform).

System action

The command is ignored for the invalid receiver. Any valid receivers specified are processed.

User response

Reissue the command with the correct receiver.

ANR18 11W The Host Bus Adapter API package might not be installed.

System action

None.

User response

The HBA API does not provide the number of Fibre Channel adapters from the host system. The HBA API file version that is on your operating system might not be supported or the HBA API package might not be installed. Go to the HBA vendor website to obtain the latest version of the HBA API. For a list of supported HBAs and required HBA API levels

by operating system, see techdoc 1193154 at <http://www.ibm.com/support/docview.wss?uid=swg21193154>.

**ANR18 DELETE
12E FILESPACE
 filesystem name
 for node *node*
 name failed
 deletion
 because of a
 replication in
 progress.**

Explanation

The reported filesystem belonging to the reported node is currently being replicated as part of a REPLICATE NODE command. A filesystem cannot be deleted while the replication is in progress.

System action

The DELETE FILESPACE ends with a state of FAILURE.

User response

Use the QUERY PROCESS command to view active REPLICATE NODE processes. Either wait for the replication to complete or cancel the replication process with the CANCEL PROCESS or CANCEL REPLICATION commands, and reissue the DELETE FILESPACE command.

**ANR18 Filespace
13W *filesystem name*
 for node *node*
 name is a
 replication
 replication role.**

Explanation

The reported filesystem is either the source or target of a replicated node. The DELETE FILESPACE command will delete the data on this server, but will not delete the data on any other replication servers.

System action

The DELETE FILESPACE command continues.

User response

If this message indicates this filesystem is the source of replicated data, then login to all servers containing replicated data from this filesystem and issue the DELETE FILESPACE command to remove the data from those servers. If this message indicates this filesystem is the target of replicated data, ensure that the filesystem on the source server is either deleted, or updated to no longer replicate to this server.

**ANR18 The database
14W manager cannot
 load the
 security plugin
 file name.**

Explanation

The database manager cannot load the security plugin. This plugin controls access to the database manager from the IBM Storage Protect server.

System action

The server stops.

User response

Inspect the Db2 diagnostic log file to identify the reason the database manager cannot load the security plugin. Correct the problem and restart the server.

**ANR18 Check target
15W server for
 storage
 problems during
 replication of
 node *node list*.**

Explanation

During the replication process for the specified nodes, there were problems storing data at the replication target server.

System action

Processing ends.

User response

Check the activity log of the target server for specific error messages relating to data storage during the replication process.

**ANR18 The names of
16W one or more
 files were
 truncated.
 Examine log file
 log file name for
 details.**

Explanation

The DSMSERV INSERTDB command attempted to insert a database row describing a file whose path name is longer than the maximum path name supported by IBM Storage Protect V6. The IBM Storage Protect V5 server supported path

names of up to 8000 bytes, but the V6 server does not allow path names to be longer than 6000 bytes.

System action

The name of the file was replaced by a system-generated name. Information needed to restore the file to its original name was written to the specified log file.

The log file contains two sections. The first section lists files whose names were truncated. The second section identifies the node names and filesystem names of the truncated files.

The first section is identified by the header "-- Truncated Files --". Each line of this section identifies one file whose name was truncated. The line consists of four fields, separated by tabs:

- Node ID - a numeric identifier for the node that owns the file.
- Filespace ID - a numeric identifier for the file's filesystem.
- New Name - the system generated name that was assigned to the file.
- Original Name - the original name of the file.

The second section is identified by the header "-- Node and Filespace Names --". Each line in this section maps the node ID and filesystem ID associated with one or more of the files in the first section to a node name and filesystem name that can be specified on a restore command. The

line consists of four fields, separated by tabs:

- Node ID - a numeric identifier for the node that owns the file.
- Node Name - the name of the node associated with the node ID.
- Filespace ID - a numeric identifier for the file's filespace.
- Filespace Name - the name of the filespace associated with the filespace ID.

User response

Inspect the contents of the specified log file. If necessary, use the information in the log file to restore the files to their original name.

ANR18 17W *command: No valid nodes were identified for import on target server tgtServerName.*

Explanation

During a server-to-server export, the import process on the target server reported that none of the node definitions in the export data were valid for import. No node data was imported on the target server.

System action

None.

User response

Check for warning or error messages on the target server and handle as needed.

ANR18 18W *command: No valid nodes*

were identified for import.

Explanation

During a server import process none of the node definitions in the import data were valid for import. No node data was imported.

System action

None.

User response

Check for warning or error messages during the import process on the server and handle as needed.

ANR18 19E *Permission denial to device device name.*

Explanation

A read-only attribute is assigned to non-root users and their tape device files. If this attribute is not changed, non-root users cannot store data to tape devices. This only affects HP-UX, Linux, and Solaris operating systems.

System action

The open operation fails.

User response

Issue the CHMOD system command to change the read-only attribution for specific tape device files and run the previously failed operation again. See Technote 1321130 for details about resolving this problem: <https://www-304.ibm.com/>

support/docview.wss?uid=swg21321130

ANR18 20E *The server could not connect to the database manager by using TCP/IP port port number.*

Explanation

The server attempted to connect to the database by using TCP/IP, but it was not able to do so.

System action

The server stops.

User response

First, verify that the port number is not already in use. Possible methods include:

- On Unix systems, inspect /etc/services for an occurrence of the port number.
- Use the netstat command to determine if a service is listening on the port number.

If a conflict is detected, specify a different port number on the DBMTCPPORT option in the server options file and restart the server.

If no conflict is found, use the "db2 get database manager config" command to verify that the SVCENAME configuration parameter is set to the port number identified by the message. If not, then use the "db2 update database manager config using SVCENAME port number" command to manually update the

configuration parameter. Ensure that the value specified is also specified on the DBMTCPPORT server option. Restart the server.

Finally, use the "db2set" command to verify that the DB2COMM environment variable is set to "TCPIP". If not, then use the "db2set DB2COMM=TCPIP" command to set the environment variable and restart the server.

ANR18 21W *Event logging is not started for the receiverName receiver.*

Explanation

In response to a BEGIN EVENTLOGGING command, recording of event log records to the specified receiver was attempted. The event logging for the specified receiver is already started because either the receiver is currently running or the receiver was terminated previously and is still in the process of writing the messages that were queued up for processing.

System action

None.

User response

Check to see if the event log receiver is already started by issuing the QUERY STATUS command, and checking the Active Receivers field. Some event log receivers such as FILETEXT, FILETEXTEXIT, USEREXIT, and Tivoli

receiver, can be started during server initialization if they are configured in the server options file.

- If the event log receiver is already started you do not take any further action.
- If the event log receiver is not currently running then wait and try to start it again after a short delay.

ANR18 Event logging ended for the receiverName receiver.

Explanation

In response to an END EVENTLOGGING command or because an error occurred, event log records are no longer being output to the specified receiver.

System action

None.

User response

None.

ANR18 Event logging ended for all receivers.

Explanation

In response to an END EVENTLOGGING command, event log records are no longer being output to any receiver.

System action

None.

User response

None.

ANR18 Event logging is inactive for the specified receiver.

Explanation

An END EVENTLOGGING command has been entered, but logging is not active for the specified receiver.

System action

The command is ignored.

User response

If logging is desired, use the ENABLE EVENT and BEGIN EVENTLOGGING commands to activate event logging.

ANR18 Event logging active for the receiverName receiver.

Explanation

In response to a BEGIN EVENTLOGGING command, event log records are now being output to the specified receiver.

System action

None.

User response

None.

ANR18 During command processing, object Object Name was skipped.

Explanation

When you issue the EXPORT NODE or EXPORT SERVER command,

backup objects that otherwise would be deleted from operational data according to expiration policies might be skipped. Backup objects that remain in server inventory because of their inclusion in retention sets are not exported. In all other cases, when you issue the EXPORT NODE or EXPORT SERVER commands, active and inactive objects that are not expired are exported.

System action

System operation continues, but the export process skips the specified object and processes the next available object.

User response

No action is required.

ANR18 Eventlog 27E command: No valid receiver specified.

Explanation

An event logging command has been entered, and no valid receivers were specified.

System action

The command is ignored.

User response

Reissue the command with the correct receiver.

ANR18 Session session number for node, admin, or server name (client platform) refused - protocol

protocol required.

Explanation

No TLS/SSL connection was established, therefore the server did not start a session because an TLS/SSL connection with a higher protocol is required.

System action

Server operation continues.

User response

Configure the client or target server to use a higher TLS/SSL protocol. This may require importing a new server certificate on the client or target server. For example, import the cert256.arm instead of the cert.arm file.

ANR18 Eventlog 29E command: Server events may not be disabled for the activity log receiver.

Explanation

A DISABLE EVENT command has been entered for the activity log receiver.

System action

The command is ignored for the activity log receiver. Any valid receivers specified are processed.

User response

Reissue the command with the correct receiver.

ANR18 30E *receiverName*
receiver options
not defined in
the server
options file.

Explanation

A BEGIN EVENTLOGGING command has been entered for a receiver, but the required receiver options were not specified in the server options file.

System action

Logging is not started for the specified receiver.

User response

Enter the receiver options in the server options file and restart the server.

ANR18 31I **Event logging of**
client events
ended for
ACTLOG
receiver.

Explanation

An END EVENTLOGGING command has been entered for the activity log receiver.

System action

The server no longer records client events in the activity log. Server events continue to be recorded in the activity log.

User response

None.

ANR18 42E **An error**
occurred on the
receiverName
receiver.

Explanation

An error occurred on the specified receiver.

System action

The server no longer sends events to the receiver.

User response

Issue a BEGIN EVENTLOGGING command for the receiver to attempt to start logging events to the receiver again.

ANR18 43I **Fasp monitor**
collector
finished and
exiting.

Explanation

The Fasp monitor processing collector is terminating processing because the Fasp monitoring function has been set to off or the system is shutting down.

System action

None, the Fasp monitor collector terminates.

User response

The Fasp status processing was turned off using the SET MONITORFASP command.

ANR18 44I **Eventlog**
command
command
processed.

Explanation

The specified command was processed.

System action

None.

User response

If any previous messages indicate that parts of the command failed, reissue the command for those parts only.

ANR18 50E **Circular event**
logging
detected. The
event server has
previously
handled event
Event number
from Source
trail. To prevent
looping, events
which have
already been
logged by the
event server are
not sent again.
Please correct
the situation
causing circular
logging to avoid
wasting system
resources.

Explanation

The server is attempting to log an event which has previously been handled by the event server that is currently defined.

System action

The event is not sent to the event server. Other events will still be sent, and this message will be issued periodically if this situation is detected again.

User response

Determine what is wrong with the server to server event logging setup, and fix the problem.

ANR18 51E **The source trail**
for server to
server event
logging has
exceeded the
maximum
length of
Maximum
sourcetrail
length bytes.

Explanation

While attempting to log an event to the event server, the server has found that the source trail length is too long.

System action

The server continues to try to send the event to the event server, but the source trail may be truncated and appear something like:

name1>...>name
x>namey

where,

nam is the originator of
e1 the event.

... is where
intervening server
name(s) have
been left off the
source trail.

User response

Most likely you are using very long server names and/or have excessive hops from server to server. Either use shorter server names or change your configuration to reduce the number of hops.

ANR18 52E **Unable to send**
header to TEC at
TEC server rc
return code

Explanation

A network error has occurred in attempting to send the event header to the Tivoli Enterprise Console.

System action

None.

User response

Verify network connections and contact your service representative if this error persists.

ANR18 Unable to send data to TEC at TEC server rc return code

Explanation

A network error has occurred in attempting to send the event data to the Tivoli Enterprise Console.

System action

None.

User response

Verify network connections and contact your service representative if this error persists.

ANR18 Unable to flush data to TEC at TEC server rc return code

Explanation

A network error has occurred in attempting to flush data to the Tivoli Enterprise Console.

System action

None.

User response

Verify network connections and contact your service representative if this error persists.

ANR18 Failure validating protocol between client and server for node node on session session number

Explanation

For a node having the "VALIDATE PROTOCOL" option set to either "DATAONLY" or "ALL", a validation error occurred. The transaction is aborted and an indication is sent to the client indicating the failure.

System action

None.

User response

Verify network connections and contact your service representative if this error persists.

ANR18 Command: Volumes will not be processed because no volumes are eligible for processing.

Explanation

Based on the parameters that were specified in the command, no volumes are eligible for processing.

System action

System operation continues.

User response

No action is required. However, to process the volumes, take the following actions:

1. Review the parameters that were specified for the command.
2. Reissue the command with one or more updated parameters to ensure that volumes are processed.

ANR18 AUDIT VOLUME 57I will start count repair processes.

Explanation

The AUDIT VOLUME command will process a range of volumes due to one or more of the following parameters having been specified: FROMDATE, TODATE, or STGPOOL. The AUDIT VOLUME processing will start a process for each volume that qualifies and process an AUDIT VOLUME for each volume with FIX=YES specified.

System action

One or more volumes are audited and inconsistent data is discarded.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit the volume or 'N' to stop the process.

ANR18 AUDIT VOLUME 58I will start count inspect processes.

Explanation

The AUDIT VOLUME command will process a range of volumes due to one or more of the following parameters having been specified: FROMDATE, TODATE, or STGPOOL. The AUDIT VOLUME processing will start a process for each volume that qualifies and process an AUDIT VOLUME for each volume with FIX=NO specified.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit the volume or 'N' to stop the process.

ANR18 Node node on session session id received CRC protocol validation information when it is not configured to do so.

Explanation

The server received protocol validation information for the session and node specified. The settings for this node are not configured to perform

protocol validation and any CRC information received will be ignored.

System action

The server operation continues.

User response

The server administrator should evaluate whether or not this node should perform protocol validation. If so, issue the UPDATE NODE command and specify the VALIDATEPROTOCOL option with the appropriate setting to enable protocol validation.

If this is a TYPE=SERVER node for the target of a virtual volume operation and protocol validation is not desired, the server definition on the source server should be updated with VALIDATEPROTOCOL=NO set. Otherwise, if protocol validate is desired, the SERVER type node on the target server should be updated using the UPDATE NODE command with VALIDATEPROTOCOL=ALL.

ANR18 60E Drive with serial *serial element element port port and target target lun lun* does not match with the library *libraryPath* .

Explanation

System action

User response

ANR18 61E Drive with element *element port port and target target lun lun* does not match with the library *library libraryPath* .

Explanation

System action

User response

ANR18 62W *command: This command will remove all replication information for the server with ID Unique ID.*

Explanation

All replication information stored on this server that references the indicated server will be deleted. Subsequent replications to the indicated server may cause data to be re-sent.

System action

The system asks whether you wish to continue with the REMOVE REPLSERVER command.

User response

To process the REMOVE REPLSERVER command, enter 'Y' to continue or 'N' to stop the process.

ANR18 63E library *libraryPath* and serial *serial* does not support Read

Element Status command. It is very old and should be replaced with newer model.

Explanation

System action

User response

ANR18 64E library *libraryPath* does not support Read Element Status command and it does not have a serial number. It is very old and should be replaced with newer model.

Explanation

System action

User response

ANR18 65I *export command : Summary for Restartable Export operation export identifier :*

Explanation

A summary of the total number of objects transmitted in the restartable export operation with *export identifier* is displayed following this message.

System action

Export processing for the command ends. Server operation continues.

User response

None.

ANR18 66I *Export/import command: Processing suspended with status status.*

Explanation

The background process to service the command *command* was suspended with a SUSPEND command.

System action

Processing for the command *command* stops. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message.

User response

None.

ANR18 67I *Export/import command: Processing completed with status status.*

Explanation

The background export or import process to service the command *export/import command* has completed with status *status*. If the status is INCOMPLETE, some files have been skipped due to errors reading or writing the file.

System action

Export or import processing for the command completes. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message. A summary of the number of files that were skipped is also displayed.

User response

None.

ANR18 Export/import 68I command:
Copied filespace number file spaces archive number archive files, backup number backup files, and spacemg number space managed files.

Explanation

The background export or import process to service the command *export/import command* copies *filespace number* client file space definitions, *archive number* archive file copies, *backup number* backup file copies, and *spacemg number* space-managed files from either the server database to export media or from import media into the server database. Data is not actually moved if *Preview=Yes* is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR18 Export/import 69W command:
Skipped archive number archive files, backup number backup files, and spacemg number space managed files.

Explanation

The background export or import process to service the command *export/import command* skipped *archive number* archive file copies, *backup number* backup file copies, and *spacemg number* space-managed files from either the server database to export media or from import media into the server database. Data is not actually moved if *Preview=Yes* is specified in the command *export/import command*.

System action

Export or import processing for the command completes. Server operation continues.

User response

Check previous messages for the names of the files that were not exported or imported, and

problem determination information.

ANR18 Export/import 70I command:
Copied number bytes of data.

Explanation

The background export or import process to service the command *export/import command* copies *number* bytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. Data is not moved if *Preview=Yes* is specified in the command *export/import command*. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR18 Export/import 71I command:
Copied number kilobytes of data.

Explanation

The background export or import process to service the command *export/import command* copies *number* kilobytes of data from the server database

and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR18 Export/import 72I command:
Copied number megabytes of data.

Explanation

The background export or import process to service the command *export/import command* copies *number* megabytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes.

Server operation continues.

User response

None.

ANR18 73I *Export/import command: Copied number gigabytes of data.*

Explanation

The background export or import process to service the command *export/import command* copies *number* gigabytes of data from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR18 74I *Export/import command: Copied number terabytes of data.*

Explanation

The background export or import process to service the command *export/import command* copies *number* terabytes of data

from the server database and data storage to the export media or from the export media to the server database and data storage. This figure can be used during export preview processing to estimate the number of removable media volumes needed to hold the exported information from the server.

System action

Export or import processing for the command completes. Server operation continues.

User response

None.

ANR18 75I *Export/import command: Detected number errors.*

Explanation

The background export or import process to service the command *export/import command* detects *number* errors while copying information from the server database and data storage to the export media or from the export media to the server database and data storage.

System action

Export or import processing for the command completes. Server operation continues.

User response

Examine the server messages issued prior to

this message to view the error. Use the QUERY ACTLOG command to view the activity log and search for messages.

ANR18 76W *Export/import command: Detected an unexpected value, value, for the data-transfer path option setting for node node name. The default value of 'ANY' is used for the node.*

Explanation

The export or import operation detected an unexpected data-transfer path value for the node. As a result, the default value of 'ANY' is used for the node and indicated data-transfer path option.

System action

Export or import processing for the command completes. Server operation continues.

User response

If the data-transfer path setting of 'ANY' is acceptable for the node, do nothing further. If you must change the setting, use the UPDATE NODE command.

ANR18 77E *NAS backup process terminated - NAS file server NAS file server name reported illegal arguments.*

System action

The indicated process ends.

User response

Verify the that the filesystem exists on the NAS file server. If backing up a NAS virtual filesystem verify that the path specified in the virtual filesystem exists.

For details about how to identify the cause of the terminated NDMP operations, see the NAS file-server documentation. Check the NDMP logs for the NAS file server and correct the cause of the errors and restart the operation.

ANR18 78E *A database manager configuration parameter cannot be updated. The value of the DIAGSIZE parameter is greater than the amount of free space available in the database manager's diagnostic data directory.*

Explanation

The error occurred because the current value of the DIAGSIZE database manager configuration parameter is greater than the amount of free space in the drive or the file system that contains the diagnostic data directory.

System action

The operation fails. Depending on the configuration parameter that is being updated, the server might stop.

User response

Complete one of the following options:

- Specify a smaller value for DIAGSIZE.
- Change the location of the diagnostic data directory to a drive or file system that has more free space.
- Increase the amount of free space on the drive or file system containing the diagnostic data directory.

To check the current setting of the DIAGSIZE configuration parameter, issue the following database command:

```
db2 get dbm cfg
```

and search for "DIAGSIZE".

To change the value of the DIAGSIZE configuration parameter, issue the following command:

```
db2 update dbm cfg  
using DIAGSIZE new_size
```

new_size is the value, in megabytes, of the DIAGSIZE configuration parameter. The value must be 2 or greater.

For more information, see "Locating Db2 diagnostic log files" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR18 79E command:
Multiple replication server IDs match the specified ID pattern.

Explanation

During a REMOVE REPLSERVER command, a wildcard was used for the replication server ID. This resulted in more than 1 matching server ID. To avoid accidental erasure of replication information, only a single replication server ID can be removed at a time.

System action

The command is terminated by the server.

User response

Issue the REMOVE REPLSERVER command with a more specific replication server ID value such that only one matching server ID is selected.

ANR18 80W Server transaction was canceled because of a conflicting lock on table table name.

Explanation

The server online reorganization for the referenced table could not be completed because of a lock conflict between the reorganization process and a server process. The server process was canceled to allow the reorganization process

to be completed. In some cases, the server might need to cancel multiple server processes to resolve the lock conflict. Consequently, this message might be displayed multiple times as server processes are forced to stop. In addition, other server application error messages might be displayed as the lock conflicts are resolved.

System action

The server will continue to operate; however, until the lock conflict is resolved, no new reorganizations will be started.

User response

Review the server activity log and determine whether a critical server operation was canceled that should be restarted. If so, restart the server operation.

ANR18 81E Command or operation:
Failure because the LDAPUSER password is expired.

Explanation

The password credentials for the user account specified as the LDAPUSER are expired and need to be updated.

System action

The operation fails.

User response

The administrator for the LDAP directory

server must update the password for the LDAPUSER account in the LDAP directory server. Then, after the LDAP administrator updates the password, issue the LDAPPASSWORD command to match the new password. Reissue the command that failed.

ANR18 82E Command or operation:
A password was reset and must change while accessing the LDAP administrator or node entry admin or node name with administrator/node name or LDAPUSER credentials.

Explanation

The password credentials used for this operation were reset and you must update the password on the LDAP directory server.

System action

The operation requires a password update.

User response

If the operation used the LDAPUSER credentials, update the password for the user account specified as the LDAPUSER in the LDAP directory server. If the operation used node or administrator credentials, a password expiration status is issued to force a password update.

ANR18 83E Command or operation:
An

access failure occurred while accessing the LDAP administrator or node entry admin or node name with administrator/node name or LDAPUSER credentials.

Explanation

The command failed after the IBM Storage Protect server accessed an entry in the LDAP directory server and received a locked account error.

System action

The operation fails.

User response

If the operation used the LDAPUSER credentials, unlock the user account specified as the LDAPUSER in the LDAP directory server. If the operation used a node or administrator credentials, unlock the node or administrator by issuing the UPDATE NODE or UPDATE ADMIN command with a password or directly unlock the node or administrator account in the LDAP directory server.

ANR18 84E Command or operation: An authentication failure occurred with the LDAP directory server when the LDAPUSER credentials were used.

Explanation

The IBM Storage Protect server tried to authenticate and access was denied.

System action

The operation fails.

User response

Validate that the LDAPUSER, the LDAPPASSWORD, and the LDAPURL are set to the correct values. Correct any invalid setting and reissue the command or operation.

ANR18 85E Command or operation: Permission was denied when the LDAP administrator or node entry admin or node name was accessed as administrator/node name or LDAPUSER.

Explanation

The command failed after the IBM Storage Protect server authenticated with the LDAP directory server as the LDAPUSER. Permission was denied when the server tried to add, modify or delete an entry in the LDAP directory server.

System action

The operation fails.

User response

The user specified by the LDAPUSER needs full access control over the

distinguished name (DN) specified in the LDAPURL server option. Correct the access control rights of the LDAPUSER or provide a different LDAPUSER who has full access control rights over the IBM Storage Protect server's DN.

ANR18 86E Entry entry name was not found in the LDAP directory server.

Explanation

The command failed because the IBM Storage Protect server tried an operation on an LDAP entry that was not found on the LDAP directory server.

System action

The operation fails.

User response

The IBM Storage Protect server tried an operation with the LDAP directory server and the operation failed because the entry could not be found. To insert a new entry for this node or administrator, issue an UPDATE NODE or UPDATE ADMIN command and provide a password.

ANR18 87E Command or operation: Failure when working with the LDAP directory server.

Explanation

The command or operation failed because of an error returned

by the LDAP directory server.

System action

The operation fails.

User response

The IBM Storage Protect server ran an operation with the LDAP directory server and the operation failed. Specific error details are contained in previous messages. The common causes of LDAP failures are as follows:

- A communication error occurred with the LDAP directory server
- The LDAPURL is invalid or missing (wrong hostname or base DN)
- The LDAPUSER is invalid or missing (wrong value or locked)
- The LDAPPASSWORD is invalid or missing (wrong value or expired)

Update the LDAP directory server settings or contact your LDAP administrator to resolve this issue

ANR18 88W Session session number for node node name (client platform) refused - client requires SSL connection with this server.

Explanation

No SSL connection was established, therefore the server did not start a client session because the client node or admin requires an SSL connection.

System action

Server operation continues.

User response

Configure the client to use SSL or update the node or admin definition on the server such that SSL is not required (update SSLREQUIRED parameter). If the node is created with SSLREQUIRED=SERVERONLY, a corresponding admin definition is created with SSLREQUIRED=YES. To use a non-SSL session with a storage agent, rename the admin with the identical name by issuing the RENAME ADMIN command.

ANR18 Session session 89W *number was terminated during backup for node node name (client platform), with file space filespace id or name because a restore operation is in progress.*

Explanation

During a file backup operation, the server ends a node session because one or more files are locked by a restore operation.

System action

The backup session is terminated by the server.

User response

Issue the QUERY RESTORE command with FORMAT=DETAILED to determine if the restore operation is active or is in a restartable state. A restartable restore operation keeps files locked until the amount of time that is specified for the RESTOREINTERVAL server option is reached. You can lower this value to free up locked files. Issue the QUERY OPTION command to display the current setting for the RESTOREINTERVAL option.

If you received this message due to a client backup operation, restart the operation after the restore operation has completed in order to move any remaining files. You can also cancel the restartable restore session with the CANCEL RESTORE command.

ANR18 Backup 90W *operation for session session number node client node name failed due to root-only restriction.*

Explanation

The backup operation failed because a non-root user attempted the operation. A restriction is in place to disallow backup operations by non-root users for the indicated node.

System action

The backup operation is terminated. A message

is issued by the client. For clients that are levels prior to 6.3, message ANS0350E may appear.

User response

Retry the backup operation as the root user.

ANR18 Command or 91E *operation: The operation cannot be completed when the Lightweight Directory Access Protocol (LDAP) mode is set to Integrated.*

Explanation

In Integrated mode, the LDAP directory cannot be modified.

System action

The operation fails.

User response

Run the operation by using LDAP utilities instead of server commands.

ANR18 Process process 92W *ID for process name completed with a completion state of SUCCESS but warning or more-severe messages were issued.*

Explanation

The process completed with a completion state of SUCCESS but warning messages or more-severe

messages were issued by this process. This process may not have completed all of the processing.

System action

None.

User response

Review the messages in the activity and event logs that were issued by this process. Determine if the conditions that caused these messages to be issued had an affect on the operation.

ANR18 Process process 93E *ID for process name completed with a completion state of FAILURE.*

Explanation

The process completed with a state of FAILURE.

System action

None.

User response

Review the messages in the activity and event logs that were issued by this process. Determine the conditions that caused these messages to be issued, resolve those issues and retry the operation.

ANR18 command: 94E *Processing for node node name, file space file space name failed because of a lock conflict.*

Explanation

The server could not obtain a resource that is required to process the indicated file space.

System action

The command continues, but processing of the indicated file space fails.

User response

To increase the probability of acquiring all of the necessary resources, issue the indicated command when server activity is relatively low.

ANR18 Command or 95W operation: The password for the node *node name* now uses case-sensitive passwords.

Explanation

The node is authenticating with an LDAP directory server. The LDAP authentication password policy is dictated by the LDAP directory server and this usually requires passwords to be case-sensitive.

System action

None.

User response

None.

ANR18 Unable to 96E allocate volume *volume name* because it is still referenced in the volume history.

Explanation

The volume cannot be allocated because the active volume history record shows the volume as being in use.

System action

The active volume history record shows the volume as being in use.

User response

The volume is being managed by the server or it might be incorrectly referenced in the volume history table due to out-of-date records. To check the records and confirm the volume history status, issue the QUERY VOLHISTORY command. If there is an invalid volume history record, use the DELETE VOLHISTORY command to remove the record. If the DELETE VOLHISTORY command fails, contact IBM Software Support to remove the record.

ANR18 LDAP password 97I removed.

Explanation

The password that the server uses to authenticate with the LDAP server was removed by the SET LDAPPASSWORD command.

System action

None.

User response

None.

ANR18 LDAP user name 98I removed.

Explanation

The LDAP user distinguished name (DN) that the server uses to authenticate with the LDAP server was removed by the SET LDAPUSER command.

System action

None.

User response

None.

ANR18 Command or 99W operation: Unable to work with the LDAP directory server.

Explanation

The command or operation finished, but the IBM Storage Protect server did not work with the LDAP directory server because the LDAP directory server configuration is incomplete. If a node or administrator was being created or updated on the LDAP server, you cannot use it to logon until the server is able to use LDAP directory server information.

System action

The operation finished, but information was not added to the LDAP directory server.

User response

An operation was run on the IBM Storage Protect server with the LDAP directory server. The operation succeeded, but information was not

added to the LDAP directory server because the LDAP directory server configuration is incomplete. Common incomplete configuration scenarios are as follows:

- LDAPURL values were not provided in the server options file
- The LDAPUSER is invalid (wrong value or locked)
- The LDAPPASSWORD is invalid (wrong value or expired)

Update the LDAP directory server information or contact your LDAP administrator to resolve this issue. After completing the LDAP configuration, when you add a node or admin with LDAP authentication, you are required to submit a new password when you log on to the IBM Storage Protect server.

ANR19 Path between 00E server server source and library parm is not allowed.

Explanation

You must specify a path from the current server to the library when you are defining the library. You cannot specify a path from a different server.

System action

The server ignores the command.

User response

Reissue the command with a different source or destination name or define a new path.

ANR19 01I The specified session is associated with *process name process process id* and can not be cancelled.

Explanation

The server can not cancel the session because it is associated with a running process.

System action

Server operation continues.

User response

The session can only be cancelled by cancelling the associated process. Use the CANCEL PROCESS command to cancel a process.

ANR19 02W Node *node name* on server *server name* is not enabled for replication. It will not be replicated.

Explanation

The server is not able to replicate the specified node because the node on the specified target server is not enabled for replication.

System action

The node is not replicated to the specified server. Server operation continues.

User response

Enable the node on the target server for

replication and rerun the replication command.

ANR19 03E Export *export name* is not defined.

Explanation

An NFS client attempted to mount the specified name as a mount point. The specified name is not currently being exported by the server.

System action

The server does not provide an export of the specified directory.

User response

Ensure that an NFS ADDEXPORT command was issued for the specified node.

ANR19 04E Missing or invalid value for *option*. A valid directory needs to be defined for this.

Explanation

The server detects a missing or invalid value for a server option. A valid directory needs to be defined for this option.

System action

Server initialization stops.

User response

Correct the error and restart the server.

ANR19 05E Path *dir name* for *parm* does not exist or is not empty.

Explanation

The directory specified does not exist or is not empty.

System action

The server stops.

User response

Reissue the command with a valid path name.

ANR19 06E Command: failed to extend the database space.

Explanation

A failure occurred during the extend database space. This occurred during the processing of a 'EXTEND DBSPACE' command.

System action

Server operation continues.

User response

Review error messages to determine the cause of the failure and retry the 'EXTEND DBSPACE' once the issue has been resolved. If unable to determine the cause of the failure or to resolve it, please contact your IBM service representative for further assistance.

ANR19 07E The server can not resolve absolute path of directory *dir name*. That path might not exist.

Explanation

The directory specified does not exist or is not accessible.

System action

The server operation stops.

User response

Reissue the command with a valid path name.

ANR19 08W Invalid value for *parameter parameter - parameter valueMB*. The default value *default valueMB* is used for this parameter.

Explanation

The value (*parameter value*) specified for the (*parameter*) parameter is not a valid. The server uses the default value for this parameter.

System action

Processing of the command continues by using the default value.

User response

Verify that the correct value have been used. Update the value, if necessary.

ANR19 09W Invalid value for *option name option - option valuetype*. The default value *default valuetype* is used for this option.

Explanation

The value (*option value*) specified for the (*option*) option is not valid. The server uses the default value for this parameter.

System action

Server operation continues.

User response

Verify that the correct value have been used. Update the value, if necessary.

ANR19 Directory 10E *directory name is already defined for other path in the command.*

Explanation

While processing the command argument list, a duplicate path name has been encountered.

System action

The command terminates.

User response

Issue the command again, specifying a directory that is not in the argument list.

ANR19 Invalid value for 11W *option name option - option valuetype. The default value default valuetype is used for this option.*

Explanation

The value (*option value*) specified for the (*option*) option is not valid. The server uses the default value for this parameter.

System action

Server operation continues.

User response

Verify that the correct value have been used. Update the value, if necessary.

ANR19 Stopping the 12I *activity log because of a server shutdown.*

System action

Stopping the activity log because of a server shutdown.

User response

None.

ANR19 command 13I *successfully started number of processes IDENTIFY processes.*

System action

The server successfully started the indicated number of IDENTIFY processes.

User response

Review the status of the identify processes using the QUERY PROCESS or QUERY ACTLOG commands.

ANR19 command 14I *successfully ended number of processes IDENTIFY processes.*

System action

The server successfully ended the indicated number of IDENTIFY processes.

User response

Review the status of the identify processes using the QUERY ACTLOG command.

ANR19 Autocopy 15I *process process ID started transferring data to target storage pool storage pool name.*

Explanation

An autocopy process to the named active-data or copy storage pool has started.

System action

None.

User response

None.

ANR19 Autocopy 16I *process process ID ended successfully for storage pool storage pool name. Files Transferred: number of files, Bytes Transferred: number of bytes.*

Explanation

An autocopy process to the named active/copy storage pool has ended successfully.

System action

None.

User response

None.

ANR19 Autocopy 17E *process process ID failed for storage pool storage pool name. Files Backed Up: number of files, Bytes BackedUp: number of bytes. Result code: return code.*

Explanation

An autocopy process to the named active/copy storage pool has ended in failure.

System action

None.

User response

Check the activity log for messages that were issued prior to completion. The messages may give more information about the failure.

ANR19 Autocopy 18I *process process ID stopped for storage pool Storage pool name because of a server error.*

Explanation

An autocopy process to the named active-data or copy storage pool has been disabled.

System action

None.

User response

Check the activity log for messages that were issued before the process stopped. The messages may give more information about the failure.

ANR19 19W Autocopy process process ID was disabled for storage pool Storage pool name . At least one storage pool in the hierarchy is enabled for deduplication.

Explanation

All autocopy processes have been disabled because at least one target storage pool is enabled for deduplication.

System action

None.

User response

Either disable deduplication for all storage pools in the storage-pool hierarchy or remove the deduplicated storage pool from the autocopy storage-pool hierarchy.

ANR19 20W A query for the number of HBA adapters has

timed out with a current value of timeout value.

Explanation

The HBAAPI function to get the number of HBA adapters failed with a time out.

System action

None.

User response

Check all of the HBA adapters on the system and ensure that they are configured correctly. Increase the SANDISCOVERYTIMEOUT value and try again. If the SANDISCOVERYTIMEOUT option is not set, set it with a higher value.

ANR19 21W A query for the name of an HBA adapter has timed out with a current value of timeout value.

Explanation

The HBAAPI function to get a name from an FC adapter failed with a time out.

System action

None.

User response

Check all of the HBA adapters on the system and ensure that they are configured correctly. If there is an FC adapter that is not functional, remove it from the system and reconfigure the HBA driver. If there is no device on an

FC port, increase the SANDISCOVERYTIMEOUT value and try again. If the SANDISCOVERYTIMEOUT option is not set, set it with a higher value.

ANR19 22W A request to open an HBA adapter timed out with a current value of timeout value.

Explanation

The HBAAPI function to open an FC adapter failed with a time out.

System action

None.

User response

Check all of the HBA adapters on the system and ensure that they are configured correctly. If there is an FC adapter that is not functional, remove it from the system and reconfigure the HBA driver. If there is no device on an FC port, increase the SANDISCOVERYTIMEOUT value and try again. If the SANDISCOVERYTIMEOUT option is not set, set it with a higher value.

ANR19 23W A query for fibre channel adapter attributes has timed out after timeout value seconds.

Explanation

A request to the HBAAPI library to obtain attributes for a fibre channel (FC) adapter has failed to respond within the allotted time.

System action

None.

User response

Ensure all fibre channel adapters on the system are configured correctly. If there is an adapter that is non-functional, remove it from the system. If there is no device on an adapter port, increase the SANDISCOVERYTIMEOUT value to allow the operating system sufficient time to respond. If the SANDISCOVERYTIMEOUT option is not set, set it with a value higher than the default value.

ANR19 24W A query for fibre channel (FC) port attributes has timed out after timeout value seconds.

Explanation

A request to the HBAAPI library to obtain port attributes for a fibre channel (FC) adapter has failed to respond within the allotted time.

System action

None.

User response

Ensure all fibre channel adapters on the system are configured correctly. If there is an adapter that is not functional, remove it from the system. If there is no device attached to a particular adapter, increase the SANDISCOVERYTIMEOUT value to allow the operating system

sufficient time to respond. If the SANDISCOVERYTIMEOUT option is not set, set it with a value higher than the default value.

ANR19 25W A query for the fibre channel (FC) target mapping has timed out after timeout value seconds.

Explanation

A request to the HBAAPI library to obtain target mappings for a fibre channel (FC) adapter has failed to respond within the allotted time.

System action

None.

User response

There might be too many devices to be discovered, given the allotted time. If the SANDISCOVERYTIMEOUT option is set, increase the value. If the SANDISCOVERYTIMEOUT option is not set, set the option to a value higher than the default value.

ANR19 26W A SCSI inquiry has timed out after timeout value seconds.

Explanation

A request to the HBAAPI library to query SCSI devices has failed to respond within the allotted time.

System action

None.

User response

Ensure all devices connected to the fibre channel (FC) adapters are operational. Remove non-functional devices from the SAN and reconfigure the devices on the system. If there is no device on an FC port, increase the SANDISCOVERYTIMEOUT value and try again. If the SANDISCOVERYTIMEOUT option is not set, set it with a value higher than the default value.

ANR19 27W Autocopy process process ID stopped for storage pool Storage pool name . The data format or device type was not compatible with the data format or device type of the primary pool.

Explanation

An autocopy process to the named active-data or copy storage pool was disabled.

System action

None.

User response

Use the QUERY STGPPOOL command to check the data format of the storage pools. Use the QUERY DEVCLASS command to check the device types of the device classes associated with the storage pools.

ANR19 28W The file descriptor table for the SAN

discovery process is full.

Explanation

There might be too many paths that have been changed and updated by the SAN discovery process.

System action

None.

User response

Use one of the following methods to resolve this problem:

- Use the SANREFRESHTIME option to increase the amount of time elapsed before the cached SAN discovery information is refreshed. For example: setopt sanrefreshtime 600.
- Increase the nofiles (descriptors) in ulimit and restart the IBM Storage Protect server.

ANR19 29E Replication of node node name to target replication server target server failed. The replication mode of the source node is SYNCSEND, and the node is not defined on the target replication server.

Explanation

In order to replicate a node that is in Sync Send mode the target node must exist on the target

replication server and be in Sync Receive mode.

System action

The replication of the node's data fails. Server operation continues.

User response

Issue the REMOVE REPLNODE command for the node on the source server, and then issue the UPDATE NODE command and specify ENABLED or DISABLED. The replication mode of the node on the source replication server is automatically set to SEND after the UPDATE NODE command is issued. After issuing the command, try the replication operation again.

ANR19 30E command: There are no eligible filespaces for node node name.

Explanation

The specified node has no applicable filespaces to be processed by the command.

System action

The operation continues.

User response

Check the command settings for the filespaces belonging to the node and retry the command.

ANR19 31E command: No replication-eligible data was found for the specified

nodes and file spaces.	target server target server.	Explanation The requested node is disabled for replication, and has been skipped.	increasing the value of the SESSIONSERVERINITTIMEOUT option in the server options file.
System action The operation ends.	Explanation During replication processing, the file space on target replication server has a pending restore operation. Files can not be stored into the file space while the pending restore is active.	System action The replication proceeds, but this node is skipped.	ANR19 36E Replication of data type data for file space <i>filespace name</i> (fsId <i>filespace id</i>) on node <i>node name</i> failed with reason: <i>reason</i> .
User response Verify that the specified nodes have data and file spaces. Verify that replication is enabled for data types in file spaces that you want to replicate. To determine the replication status for a file space, use the QUERY FILESPACE command .	System action The files are not replicated on the target replication server.	User response Enable the node for replication by using the UPDATE NODE command. You can retry replication by issuing any one of the following two options: <ul style="list-style-type: none"> • The REPLICATE NODE command • The START STGRULE command for the corresponding replication storage rule. 	Explanation The server could not replicate the specified file space for the reason indicated in the message text.
ANR19 32I command: A NAS backup image for node <i>node name</i> , file space <i>filespace name</i> was skipped for replication.	User response Use the QUERY RESTORE command and specify the FORMAT=DETAILED parameter to determine if the restore operation is restartable on target replication server. A restartable restore operation locks the files. The files cannot be moved until the value for the RESTOREINTERVAL server option is reached. Use the QUERY OPTION command to display the RESTOREINTERVAL value. You can lower the RESTOREINTERVAL value to remove a restartable restore operation earlier in the replication process and to unlock the file space. Reissue the REPLICATE NODE command after the restore operation has completed to replicate any remaining files.	ANR19 35W Session <i>session number</i> for node <i>node name</i> (client platform) refused because the server initialization is not complete after <i>timeout value</i> minutes.	System action The command continues, but replication of the file space fails.
Explanation The replication process has determined that a NAS backup image is not eligible for replication because the image, or one of its dependent files is stored in a non-native storage pool.		Explanation The specified session is refused because the server initialization did not complete within the specified time.	User response Review the reason for the failure and correct the problem, if possible. Then rerun the REPLICATE NODE command.
System action Replication processing continues.		System action The session is ended and server initialization continues.	ANR19 37I Failover Session <i>session num</i> for replica node <i>nodename</i> (platform) is enabled for store operations.
User response No action is required.		User response Allow some time for the server initialization to complete and retry the session. If this message occurs regularly, consider	Explanation The specified replica node is in failover mode and is now eligible for store operations.
ANR19 33W Replication of BACKUP data for file space <i>filespace name</i> on node <i>node name</i> skipped because of a restore operation on	ANR19 34W REPLICATE NODE: Node <i>node name</i> is disabled.		System action Any store operations request by the client

on this session will be allowed to proceed.

User response

None.

ANR19 38W The next storage pool is no longer defined for source pool storage pool name.

Explanation

The storage pool that is being migrated no longer has a next storage pool to migrate data to.

System action

The migration fails because there is no target storage pool.

User response

Ensure that the storage pool being migrated has a next storage pool before running any further migration operations.

ANR19 39W Session session number for node node name (client platform) No failover server information currently exists for this node.

Explanation

No failover server is identified for the node. The client removes any failover configuration that is stored in the client options file.

System action

Server operation continues.

User response

To ensure that failover can occur, replicate this node to a secondary server.

ANR19 40E Source file(line number): Unique ID generation failed with Return code.

Explanation

An internal error occurred when a unique ID is created. This error message always accompanies another error message which provides more details about the error.

System action

Server operation continues.

User response

Review the reason for the failure and correct the problem, if possible.

ANR19 41I Replicating option set option set name from source server source server name.

Explanation

A new option set which is referenced by a replicated node is created by the replication process from the definition on the source replication server.

System action

Server operation continues.

User response

None.

ANR19 42W Option set option set name already exists. Skipping for replication from source server source server name.

Explanation

A new option set which is referenced by a replicating node is not replicated because an option set with the same name already exists on this server. The option set is not a replica of the option set for the source server.

System action

Server operation continues.

User response

In order to replicate the required option set, consider copying the option set to an option set with a different name and update the replicating node to reference the new option set.

ANR19 43I Replicated option set option set name being updated with option set from source server source server name.

Explanation

An existing replicated option set on this server is updated with an option set with the same name from the source server.

System action

Server operation continues.

User response

None

ANR19 44I Replicating option set option set name with option count options needed by node referencing node to server target server.

Explanation

An option set on this server is replicated to a target server because it is referenced by a node which is being replicated.

System action

Server operation continues.

User response

None

ANR19 45I Option set option set name successfully replicated to server target server.

Explanation

An option set on this server has been successfully replicated to the target server.

System action

Server operation continues.

User response

None

ANR19 46W Option set *option set name* already exists on target server *target server* and is not replicated.

Explanation

An option set on this server could not be replicated to the target server because an option set with the same name already exists on the target server.

System action

Server operation continues.

User response

A node that is replicated references an option set that exists on both the source and target servers. Determine which option set is used on the target server. When you decide which option to use, rename the definition on the other server by copying it to a new option set name and deleting the original option set.

ANR19 47E Replication of option set *option set name* to target server *target server* failed. See activity log on target server for possible errors.

Explanation

An error occurred on the target server while replicating the specified option set.

System action

Server operation continues.

User response

Check the activity log of the target server for possible errors.

ANR19 48W Volume mount request for *volume name* denied - server operation cannot wait for the volume.

Explanation

If an operation acquired a volume and a second operation waits for that same volume, the first operation does not wait to acquire any other volumes. If the first operation was allowed to wait for another volume, a deadlock could occur.

System action

Server operations continue, volume acquisition may be tried again, including attempts to mount scratch tapes, but the server operation does not wait to acquire the volume.

User response

If the server operation succeeds, no action is required. However, if the operation fails, you need to supply more scratch tapes to the storage pool.

ANR19 49W Session *session number* for node *node name* (*client platform*) refused - the node has a unicode

filesystem but the client does not use unicode.

Explanation

The server cannot accept the client session because the client's platform does not use unicode and the node already contains a unicode filesystem. The server records whether or not the client's data is unicode, and does not let the node change this attribute.

System action

Server operation continues, but the node session is refused.

User response

Logon to the server from a client with a platform that uses unicode data. For example, the original platform that was used to create the existing filesystems for this node. Alternatively, if the client node needs to change to the platform that is currently being attempted, remove the existing filesystems that contain unicode data and try the node connection again.

ANR19 50W Device type *device type* in device class *device class* is not supported during a migration from z/OS to AIX, or from z/OS to Linux on System z. The device class will be skipped.

Explanation

During a migration from z/OS to AIX, or from z/OS to Linux on System z, a device class was encountered that had a device type that is not supported on the target platform.

System action

The device class will not be added to the target database.

User response

No action is required..

ANR19 51W Device class *device class* uses a recording format *format* (*format code*) that is not supported for device type *device type*. **FORMAT=DRIVE** will be used instead.

Explanation

During a migration from z/OS to AIX, or from z/OS to Linux on System z, a device class was encountered that uses a recording format that is not supported by the device type on the target platform.

System action

The recording format will be replaced with **FORMAT=DRIVE**.

User response

Verify whether **FORMAT=DRIVE** supports your media type. If not, update the device class,

specifying a supported recording format.

ANR19 52I **Library** *library name was added to the definition of device class device class.*

Explanation

During a migration from z/OS to AIX, or from z/OS to Linux on System z, a device class definition was updated to include a library that will be used for accessing media through the z/OS Media Server.

System action

The device class will be modified to use the new library.

User response

No action is required.

ANR19 53E **command:** *target platform cannot be the target of a database upgrade from source platform.*

Explanation

A cross-platform database upgrade is not supported between the indicated source and target platforms.

System action

The INSERTDB command stops.

User response

Rerun the INSERTDB command on a supported platform.

ANR19 54W **Library definition** *library was not sent to downlevel storage agent stagent.*

Explanation

The storage agent has requested a definition for a library type that is not supported and the server has not sent the definition.

System action

The storage agent does not process the library definition.

User response

Upgrade the storage agent to a level that supports the library type.

ANR19 55E **The level of Db2 installed on the system (current db2 level) is lower than the required level (required db2 level).**

Explanation

The Db2 level on the system does not meet the requirements for this server. The server package includes the required Db2 level which is installed along with the server. If the Db2 level is incorrect, it is possible that Db2 failed to upgrade during the server upgrade process.

System action

The server stops.

User response

To resolve the issue, complete the following steps:

- 1. Verify the level of Db2 installed on the system: Run 'db2level'
- 2. Review the installation log files to determine the problem that caused the Db2 upgrade failure.
- 3. Fix the problem and install the server again.
- Do not alter the Db2 software that is installed with IBM Storage Protect installation packages and fix packs. Do not install or upgrade to a different version, release, or fix pack of Db2 software. If you are unable to fix the problem, contact IBM Software Support.

ANR19 56W **The password for the administrator administrator name is expired.**

Explanation

The administrator is attempting to open a session to a remote server. The password is expired on the local server.

System action

Operation continues. The remote session may be refused.

User response

Update the password at your earliest convenience.

ANR19 57W **Command or operation:** The

password for the administrator administrator name now uses case-sensitive passwords.

Explanation

The administrator is authenticating with an LDAP directory server. The LDAP authentication password policy is dictated by the LDAP directory server and this usually requires passwords to be case-sensitive.

System action

None.

User response

None.

ANR19 58I **Command:** *Administrator administrator ID is already registered and locked.*

Explanation

An import process is trying to import an administrator ID that is registered and locked on the server.

System action

The process continues without importing the ID.

User response

Unlock admin ID ADMIN_CENTER or log off the administrator. Try the operation again.

ANR19 59I **Status monitor** *collecting*

current data at time.

Explanation

The status monitor processing is collecting a current set of data for the server at the indicated time.

System action

The process collects the monitored status data elements.

User response

The monitor status processing is enabled using the SET MONITORSTATUS command. The interval with which it collects data is controlled by the SET STATUSREFRESHINTERVAL. If the status data is being collected too frequently, increase the collection interval. Note that the administrative graphical user interface relies upon this data, do not turn off the status monitor processing if this interface will be used for the administration of IBM Storage Protect.

ANR19 Status monitor 60I finished collecting data at time and will sleep for refreshinterval minutes.

Explanation

The status monitor processing finished a data collection cycle and will sleep for the indicated number of minutes before waking up and attempting to process again.

System action

The status monitor data collection process is idle.

User response

The monitor status processing is enabled using the SET MONITORSTATUS command. The interval with which it collects data is controlled by the SET STATUSREFRESHINTERVAL. If the status data is being collected too frequently, increase the collection interval. Note that the administrative graphical user interface relies upon this data, do not turn off the status monitor processing if this interface will be used for the administration of IBM Storage Protect.

ANR19 Status monitor 61I collector finished and exiting.

Explanation

The status monitor processing collector is terminating processing because the status monitoring function has been set to off.

System action

None, the status monitor collector terminates.

User response

The monitor status processing was turned off using the SET MONITORSTATUS command. As a result of this, the administrative graphical user interface will not be able to manage this server.

ANR19 command: This 62W command is being routed to one or more servers, so its potential effect cannot be determined. Depending on the parameters that you specify, the command can be destructive or can produce a large amount of output. Destructive commands can halt the server, delete data, or change data placement or retention policies.

Explanation

The command is destructive or produces a large amount of output.

System action

IBM Storage Protect prompts the user to continue.

User response

Enter 'Y' to continue with the command. Enter 'N' if you do not want to continue with the command.

ANR19 command: This 63E command cannot be issued from the server console.

Explanation

This command cannot be issued from the server console because it may require a long time

to complete and the server console should be available to control other server functions.

System action

The server ignores the command and continues processing.

User response

Issue the command from an administrative client.

ANR19 command: This 64W command may produce a large amount of output.

Explanation

A command has been invoked that could potentially produce a large amount of output.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to terminate the command.

ANR19 Command: You 65E requested to add or remove filespace filespace name for the node collocation group collocation group name. Filespaces cannot be added to or removed from node collocation groups.

Explanation

The command was issued and the specified collocation group exists. However, the collocation group is a node collocation group and a filespace cannot be added to or removed from a node collocation group.

System action

Server operations continue, but the command is not processed.

User response

Issue the command and specify a registered collocation group that can contain filespace collocation group members.

ANR19 Command: 66E *Specify the filespace name for the collocation group collocation group name.*

Explanation

You did not provide the filespace name for the filespace collocation group. When you add or remove a collocation group member in a filespace collocation group, you must provide the filespace name for the collocation group.

System action

Server operations continue, but the command is not processed.

User response

Issue the command again and specify the filespace name for the filespace collocation group.

ANR19 Command: 67E *Command: The filespace name cannot be a wildcard character when you specify the NAMEType parameter for a filespace collocation group.*

Explanation

The command was issued, but there is a mismatch between the filespace name and the NAMEType value. When you specify the NAMEType value, the filespace name must be partially-qualified or fully-qualified.

System action

Server operations continue, but the command is not processed.

User response

Issue the command and specify a partially-qualified or fully-qualified filespace name in combination with the NAMEType parameter.

ANR19 Command: 68E *Command: The filespace name filespace name is not valid. The filespace name must be the wildcard character when you specify the CODETType parameter*

Explanation

The command was issued, but there is a mismatch between the filespace name and the CODEType value. When you specify the CODEType value, the filespace name must be a wildcard character.

System action

Server operations continue, but the command is not processed.

User response

Issue the command and specify a wildcard character for the filespace name in combination with the NAMEType parameter.

ANR19 Command: 69E *Command: filespace name is not a valid filespace ID. Filespace IDs must be numeric values when the NAMEType parameter is FSID.*

Explanation

The command was issued, but the list of filespace IDs are not numeric. When you specify the NAMEType=FSID parameter, the filespace names in the filespace name list must contain only numbers.

System action

Server operations continue, but the

command is not processed.

User response

Issue the command and specify a list of filespace IDs that contain only numbers.

ANR19 Command: 70E *Command: An invalid node name list node name was specified. A single node name must be specified when working with filespace collocation group members.*

Explanation

The command was issued, but the list of node names is invalid. When working with filespace collocation group members, only one node name can be specified.

System action

Server operations continue, but the command is not processed.

User response

Issue the command and specify a single node name.

ANR19 Command: 71W *Command: No matching file space was found for file space filespace name on node node name using the specified NAMEType and CODEType parameters.*

Explanation

The server did not find a matching file space name or file space ID for the file space and node that are specified in the command.

System action

The server ends the command.

User response

Enter the command with file space names or file space IDs that refer to defined file spaces for the specified node. Note that file space names are case sensitive. Enter the file space names by using exactly the same upper- and lowercase characters that match the file space name that is defined on the server. File space name searches are also sensitive to NAMEType (SERVER, UNICODE, FSID) and CODEType (BOTH, UNICODE, NONUNICODE) parameters. Issue the QUERY FILESPACE command to determine which file spaces and file space IDs are defined for a node on the server.

ANR19 Command: No new file space associations were added to the collocation group.

Explanation

The specified command was issued but no new file space associations are defined for the collocation group.

System action

Server operations continue, but the command has no effect.

User response

Issue the command and specify different filesystems.

ANR19 Command: 73W Nodes in the NODE parameter list node list may not contain wildcard characters when dealing with filesystem groups. No filesystem associations were deleted from the collocation group.

Explanation

The specified command was issued but no file space associations are deleted.

System action

Server operations continue, but the command has no effect.

User response

Issue the command and specify a valid client node without wildcards.

ANR19 Command: 74W Filespaces in the FILESPACE parameter list filesystem list are not associated with the filesystem collocation group

collocgroup name. No filesystem associations were deleted from the collocation group.

Explanation

The specified command was issued but no file space associations are deleted.

System action

Server operations continue, but the command has no effect.

User response

Issue the command and specify different filesystems.

ANR19 Node node name 75W is already associated with node collocation group node collocation group name. File spaces that belong to same node name cannot be added to the user specified collocation group collocation group.

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command that is used for creating file space collocation group members. Node node name is already associated with the node collocation group name

collocation group name and file spaces that belong to a node that is already in a node collocation group cannot be added to a file space collocation group. The indicated file spaces are not processed.

System action

Server operations continue.

User response

If the node name was entered incorrectly, issue the command again with the correct node name.

ANR19 Command: 76I number of filesystem members are defined in the collocation group collocation group name.

Explanation

A DEFINE COLLOCMEMBER command created the specified number of filesystem members in the indicated collocation group.

System action

None.

User response

None.

ANR19 File space 77I filesystem name on node node name is associated with filesystem collocation group

*collocation
group name.*

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command. File space *filesystem name* on node *node name* is associated with the filesystem collocation group name *collocation group name*.

System action

Server operations continue.

User response

None.

ANR19 File space 78W *filesystem name on node node name is already associated to filesystem collocation group collocation group name.*

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command. Filespace *filesystem name* is already associated with a filesystem collocation group with the name *collocation group name*. The indicated filesystem is not processed. The other filesystems can be processed if specified by the command.

System action

Server operations continue.

User response

If the filesystem name was entered incorrectly, issue the command again with the correct filesystem name.

ANR19 Node node name 79W *is already associated to one or more filesystem collocation groups and cannot be associated to a node collocation group.*

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command. Node *node name* is already associated with at least one filesystem collocation group name. The indicated node is not processed. The other nodes can be processed if specified by the command.

System action

Server operations continue.

User response

If the node name was entered incorrectly, issue the command again with the correct node name.

ANR19 File space 80I *filesystem name is disassociated from filesystem collocation group collocation group name.*

Explanation

This message is displayed in response to the DELETE COLLOCMEMBER command. Filespace *filesystem name* is no longer associated with the filesystem collocation group name *collocation group name*.

System action

Server operations continue.

User response

None.

ANR19 Command: 81I *number of filesystem filesystem members were deleted from filesystem collocation group collocation group name.*

Explanation

A DELETE COLLOCMEMBER command has deleted the specified number of filesystem members from the indicated collocation group.

System action

None.

User response

None.

ANR19 File space 82W *filesystem name exists on node node name but the filesystem is not a member of the specified collocation*

*group
collocation
group name.*

Explanation

This message is displayed in response to the DELETE COLLOCMEMBER command. Filespace *filesystem name* is not associated with a filesystem collocation group with the name *collocation group name*. The indicated filesystem is not processed. The other filesystems can be processed if specified by the command.

System action

Server operations continue.

User response

If the filesystem name was entered incorrectly, issue the command again with the correct filesystem name.

ANR19 The collocation 83W *group collogroup name exists, but the node name in the parameter list node name is not associated with the collocation group. No filesystems are associated with the collocation group.*

Explanation

The specified command was issued but no filesystems are associated with the collocation group.

System action

Server operations continue, but the command has no effect.

User response

Issue the command and specify different nodes.

ANR19 command:
84E Replication server *server name* is in use by an active replication process and cannot be removed.

Explanation

When you issue the REMOVE REPLSERVER command, the replication server that you specify to remove is in use by an active replication process. You cannot remove a replication server that is used in an active replication process.

System action

The command is stopped by the server.

User response

Issue the QUERY PROCESS command from the source replication server or the target replication server to identify active replication processes. Issue the CANCEL PROCESS command from the source replication server to stop the replication process. If running this command on a target replication server, log on to the source replication server

and issue the CANCEL PROCESS command. When the replication process stops, reissue the REMOVE REPLSERVER command.

ANR19 The remote monitoring admin *admin name* does not exist.

Explanation

The administrator used to monitor remote servers does not exist.

System action

Remote monitoring sessions will be ended.

User response

Use the SET MONITORINGADMIN command to set a new administrator for monitoring remote servers.

ANR19 The remote monitoring server group *group name* does not exist.

Explanation

The server group being remotely monitored does not exist.

System action

Remote monitoring sessions will be ended.

User response

Use the SET MONITOREDSEVERGRO UP command to set a new group for monitoring remote servers.

ANR19 A communication error occurred during session *session number* with monitored server *server name*.

Explanation

The communication error occurred while the system was receiving information from the specified monitored server.

System action

The monitoring that was in progress failed. The server will attempt to re-establish communications with the monitored server.

User response

If this error occurs frequently, consult your network administrator. Also review the activity log on both servers for messages that are related to remote monitoring.

ANR19 The remote monitoring session for server *server name* was refused - server is down-level.

Explanation

The specified remote server cannot be monitored because it must be V6.3.4 or later.

System action

Server operation continues.

User response

Upgrade the specified remote server or remove it from the remote monitoring server group using the DELETE GRPMEMBER command.

ANR19 Remote monitoring of server *server name* could not be started. Will retry in *minutes* minutes.

Explanation

An error occurred while attempting to monitor the specified remote server.

System action

Server operation continues. The specified remote server is not being monitored. The server will attempt to start monitoring again after the specified number of minutes.

User response

Check previous messages in the activity log. Verify that the specified remote server is running and is available on the network. If you no longer want this remote server to be monitored, remove it from the remote monitoring server group using the DELETE GRPMEMBER command.

ANR19 Remote monitoring started for server *server name*.

Explanation

The specified remote server is now being monitored.

System action

Server operation continues.

User response

None.

ANR19 Remote 91I monitoring ended for server server name.

Explanation

The specified remote server is no longer being monitored.

System action

Server operation continues.

User response

None.

ANR19 Command: The 92E parameter parameter is missing.

Explanation

The specified server command has been entered without all required parameters. At least the named parameter is missing.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR19 command has 93I been removed.

Explanation

The specified command was a valid server command, but is no longer needed due to new capabilities in the IBM Storage Protect server. The command has been removed.

System action

The server ignores the command.

User response

None.

ANR19 Activity log 94I pruning started: removing delete megabytes M based on current size current size megabytes M and retention setting retention size megabytes M.

Explanation

Server activity log exceeds the retention size by the *delete megabytes* specified. The activity log pruning will delete as many records as necessary to reduce the current activity log size by the *delete megabytes* size.

System action

None.

User response

None.

ANR19 Command: 95E Invalid Formatsize

**value -
formatsize value
for device class
Device Class**

Explanation

A value was specified for the Formatsize parameter which is larger than the maximum capacity value for the device class indicated in the message. The device class is associated with the storage pool specified in the DEFINE VOLUME command and is a FILE device type. The maximum capacity value of the device class is the limit of data that the server will write to the volume.

System action

The server does not process the command.

User response

Reissue the command with a Formatsize value which is less than the maximum capacity value of the storage pool. The maximum capacity can be displayed with the QUERY DEVCLASS classname F=D command.

ANR19 Command: 96E Invalid volume name prefix - volume name. Room for additional characters is required.

Explanation

The command is being used for multiple volume names. The suffix for the names is being generated in

the indicated command. When the suffix is taken into account, the specified name is too long by the indicated number of characters. Three characters must be allowed for the suffix.

System action

The server does not process the command.

User response

Reissue the command with a prefix short enough to allow for the suffix. Three extra characters are needed for the suffix.

ANR19 Command: The 97E Formatsize parameter must be specified when more than 1 volume is created.

Explanation

The command specified the creation of more than one volume with the Numberofvolumes parameter. When multiple volumes are created, the Formatsize parameter must also be specified to provide the size of the volumes. Each volume will be created with the same size.

System action

The server does not process the command.

User response

Reissue the command with the Formatsize parameter or define a single volume without the Formatsize parameter.

ANR19 Command:
98E Invalid value for
parameter
parameter -
parameter
value.

Explanation

The value (*parameter value*) specified for the (*parameter*) parameter in command *command* is not a valid value for this parameter.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid parameter value.

ANR19 Command
99I completed
successfully.

Explanation

Processing for the specified command completed successfully.

ANR Messages
02001-04000

ANR20 Insufficient
01E server memory
to initiate
command.

Explanation

A command has been entered, but the server cannot obtain enough internal memory to process the command.

System action

The server ignores the command.

System action

Server processing continues.

User response

None.

ANR20 Unknown
00E command -
command.

Explanation

The specified command is not a valid server command.

System action

The server ignores the command.

User response

Reissue the correct command.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR20 Missing closing
02E quote character.

Explanation

A server command that contains a quoted parameter has been entered, but a matching closing quote is missing.

System action

The server ignores the command.

User response

Reissue the command with properly matched quotes.

ANR20 Illegal use of
03E keyword
parameter
character (=) -
parameter.

Explanation

A server command contains the parameter shown followed by an equal sign (=), but the parameter is not a keyword parameter.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR20 Missing value
04E for keyword
parameter -
parameter.

Explanation

A server command containing a keyword parameter has been entered, but the value for the parameter is missing.

System action

The server ignores the command.

User response

Reissue the command and supply a value for the keyword parameter.

ANR20 Keyword
05E parameter
character (=)
may not be
surrounded by
blanks.

Explanation

A server command contains a keyword parameter followed by an equal sign (=), but the equal sign is preceded or followed by a blank, or both.

System action

The server ignores the command.

User response

Reissue the command without blanks next to the equal sign.

ANR20 Activity log
06E process was not
started, the
default output
stream cannot
be opened.

Explanation

The process that monitors the default (console) output stream and maintains the activity log cannot access that output stream.

System action

The server does not update the activity log.

User response

Contact your service representative.

**ANR20 Activity log
07E process was not
started, due to
an internal
error.**

Explanation

The process that monitors the default (console) output stream and maintains the activity log cannot start due to a server internal error.

System action

The server does not update the activity log.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR20 Activity log
08E process has
stopped -
database
transaction
could not be
started.**

Explanation

The process that monitors the default (console) output stream and maintains the activity log cannot continue due to a server transaction failure. This may be a memory shortage error.

System action

The server stops updating the activity log.

User response

See the documentation for the operating system about how to increase memory for an application.

**ANR20 Activity log
09E process has
stopped -
database error.**

Explanation

The process that monitors the default (console) output stream and maintains the activity log cannot continue due to a server database error.

System action

The server stops updating the activity log.

User response

Contact your service representative.

**ANR20 The active log
10W space is full.
Console
messages
cannot be
logged until log
space becomes
available.**

Explanation

If a log runs out of space, the current transaction is rolled back. The server issues an error message and halts. You cannot restart the server until the recovery log size is increased.

System action

The server halts.

User response

Monitor archive logs and active logs. If the recovery log space is insufficient, monitor the archive log space first. If the archive log space is full or nearly full, run a full database backup to remove archive logs and consider adding more disk space to the archive log directory. If the archive log space is not full and the active log space is full or nearly full, update the value of the ACTIVELOGSIZE option in the dsmserv.opt file. Set the value of the ACTIVELOGSIZE option to the new maximum size of the active log.

**ANR20 The server ran
11W out of database
space while
entries were
being added to
the active log.
Console
messages will
not be logged
until database
space becomes
available.**

Explanation

The process that monitors the console output stream and maintains the active log cannot update the active log because of insufficient database space.

System action

The server fails to update the active log.

User response

To increase the amount of database space that is available to the

server, issue the EXTEND DBSPACE command. Add one or more directories to the database.

**ANR20 Error
12W encountered for
storage pool
directory:
STGPOOLDIREC
TORY in storage
pool: STGPOOL.**

Explanation

The server encountered an error accessing the specified directory.

System action

If appropriate, the operation is attempted in another directory.

User response

Evaluate the warning and take appropriate corrective action.

**ANR20 The activity log
13E process has
encountered
unexpected
output data in
the console
output stream.
The process will
be restarted.**

Explanation

The process that monitors console output and maintains the activity log has detected invalid data (unknown data type) in the console stream.

System action

The server restarts the activity log recording process. While the process is restarting, the server may not be able to record some console

messages in the activity log.

User response

See the documentation for the operating system about how to increase memory for an application.

**ANR20 Activity log
14E pruning process
could not be
started, due to
an internal
error.**

Explanation

The process that removes expired records from the server activity log cannot begin execution due to a server internal error.

System action

The server does not prune the activity log.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR20 Activity log
15E failure -
database
transaction
could not be
started.**

Explanation

The process that removes expired records from the server activity log has failed due to a database

transaction failure, which may be a memory shortage error.

System action

The server ends activity log pruning.

User response

See the documentation for the operating system about how to increase memory for an application.

**ANR20 Activity log
16E failure -
database error.**

Explanation

The process that removes expired records from the server activity log has failed due to a server database error.

System action

The server ends activity log pruning.

User response

Contact your service representative.

**ANR20 Administrator
17I Administrator
Name issued
command:
Command**

Explanation

This message records the fact that the named administrator issued the command specified. The messages is issued and logged to provide an audit trail for administrative commands.

System action

Server operation continues

User response

None.

**ANR20 Administrator
18E Command:
Unicode
conversion
failed for
argument
Command
Argument**

Explanation

The specified command argument could not be converted to a Unicode string. Conversion can fail if the string includes characters that are not available in the server code page, or if the server has a problem accessing system conversion routines. If you issued a RENAME FILESPACE command, the new filespace name might be too long.

System action

The server command fails.

User response

Ensure that the server locale is configured correctly. If you issued a RENAME FILESPACE command, consider specifying a shorter name for the new filespace.

**ANR20 Command: No
19I nodes updated.**

Explanation

An UPDATE NODE command has been

entered, but no objects were updated.

System action

None.

User response

None.

**ANR20 Command:
20E Invalid
parameter -
parameter.**

Explanation

The specified server command has been entered with an invalid parameter.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

**ANR20 Command:
21E Missing
subcommand
keyword.**

Explanation

The specified server command has been entered without a valid subcommand (second parameter).

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR20 Command: One or more parameters are missing.
22E

Explanation

The specified server command has been entered without all required parameters.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR20 Command: Extraneous parameter - parameter.
23E

Explanation

The specified server command contains more positional parameters than is allowed.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR20 Command: Too many parameters specified.
24E

Explanation

The specified server command contains more positional parameters than is allowed.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR20 Command: Command failed - server thread resource not available.
25E

Explanation

A server command, which has a requirement to start a server thread, has been entered but cannot be executed because no server thread is available.

System action

The command is not executed.

User response

Reissue the command. If the command fails with the same error, wait for server activity to decrease and try again.

ANR20 Command: Command failed - sufficient server memory is not available.
26E

Explanation

A server command has been entered but cannot be processed because sufficient memory is not available to the server.

System action

The server does not process the command.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR20 Command: Command failed - sufficient server recovery log space is not available.
27E

Explanation

A server command has been entered but cannot be processed because sufficient recovery log space is not available.

System action

The server does not process the command.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If

necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR20 Command: Command failed - sufficient server database space is not available.
28E

Explanation

A server command has been entered but cannot be processed because sufficient database space is not available. For certain operations, like SQL commands, this message can be issued when the database has space, but it is unusable for the current request due to the DB allocation history. In this case, the database query will show a Maximum Reduction of 0.

System action

The server does not process the command.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR20 Command: Transaction failed; command not executed.
29E

Explanation

A command that is part of the current transaction has failed; therefore, any additional commands fail.

System action

The server does not process the command.

User response

Stop the administrative session, restart it, and try the command again. If this problem persists, contact your service representative.

**ANR20 Commit not
30E accepted;
transaction
failed.**

Explanation

A command that is part of the current transaction has failed; therefore, a COMMIT command cannot be processed.

System action

The server does not process the COMMIT command.

User response

Stop the administrative session, restart it, and try the command again. If this problem persists, contact your service representative.

**ANR20 Command: At
31E least one
attribute must
be specified for
update.**

Explanation

The specified UPDATE command has been

entered, but no attributes have been specified for updating.

System action

The server ignores the command.

User response

Reissue the UPDATE command with one or more attributes to be updated.

**ANR20 Command:
32E Command failed
- internal server
error detected.**

Explanation

An internal error has occurred during an attempt to process a server command. This message always accompanies another error message and provides more detail about that error.

System action

The server does not process the command.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

**ANR20 Command:
33E Command failed
- lock conflict.**

Explanation

A server command that requires the server to lock a system resource has been entered. The command cannot be executed because the resource is already in use by another command or process.

System action

The server does not process the command.

User response

Try the command again at a later time.

**ANR20 Command: No
34E match found
using this
criteria.**

Explanation

The specified command has been entered, but no objects that match the criteria can be found. In some cases when using the SELECT command, this message is issued when there is contention for a record.

System action

None.

User response

Verify that all the specified parameter values are correct. If a mistake is found, correct it and reissue the command. If you issued a SELECT command, in some cases issuing the command again will yield a match.

**ANR20 Command:
35E Administrator
administrator**

**name is not
authorized to
issue this
command.**

Explanation

The specified administrator has entered the indicated command, but this administrator does not have the proper authority necessary to run the command. Note: This message can be issued as a result of the server option REQSYSAUTHOUTFILE YES being in effect.

System action

The server does not process the command.

User response

Examine previous messages for any additional information. Issue the command from a properly authorized administrator ID, or contact the system administrator to have additional authority granted to the current administrator ID.

**ANR20 Command:
36E Process could
not be started -
sufficient
memory is not
available.**

Explanation

A background process cannot be started for the indicated command because sufficient memory is not available to the server.

System action

A new process is not started to execute this command.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR20 Command:
37E Process could not be started - lock conflict.

Explanation

A background process cannot be started for the indicated command because a required system resource is already locked by another command or process.

System action

A new process is not started to execute this command. If other processes have been started for this command, these processes may execute successfully.

User response

If necessary, try the command again at a later time.

ANR20 Command:
38E Process could not be started - server thread resource not available.

Explanation

A background process cannot be started for the indicated command because no server thread is available.

System action

A new process is not started to execute this command. If other processes have been started for this command, these processes may execute successfully.

User response

If necessary, reissue the command. If the command fails with the same error, wait for server activity to decrease and try again.

ANR20 Command:
39E Process could not be started - internal server error detected.

Explanation

A background process cannot be started for the indicated command because an internal error has occurred.

System action

A new process is not started to execute this command. If other processes have been started for this command, these processes may execute successfully.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR20 This command attempts to restore all files in storage pool storage pool which have previously been found to be damaged or which reside on a volume with access mode "destroyed"; existing references to files in storage pool storage pool will be deleted from the database after the files have been restored.

Explanation

Issuing the RESTORE STGPOOL command will result in deletion of existing files in the indicated primary storage pool after these files have been restored from a copy storage pool. If a volume with access mode destroyed becomes empty because all files on the volume have been restored to another location, the destroyed volume will be deleted from the database.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to restore the storage pool, 'N' otherwise.

ANR20 This command attempts to restore all files

in storage pool *storage pool* which reside on one of the volumes specified in the command; existing references to files on these volumes will be deleted from the database after the files have been restored.

Explanation

Issuing the RESTORE VOLUME command causes the access mode of the specified volumes to be updated to destroyed. Existing files will be deleted from the specified volumes after these files have been restored from a copy storage pool. If a volume with access mode destroyed becomes empty because all files on the volume have been restored to another location, the destroyed volume will be deleted from the database.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to restore the volumes, 'N' otherwise.

ANR20 Command:
42E Copied parameter not valid for pool type storage pool volume.

Explanation

The QUERY CONTENT server command has been entered with an invalid parameter. COPIED is not a valid parameter when the volume specified belongs to a copy or active-data type storage pool.

System action

The server ignores the command.

User response

Reissue the command without the COPIED parameter.

ANR20 Command:
43E WAIT
parameter not
allowed from
server console.

Explanation

The WAIT parameter is not allowed for commands issued from the server console.

System action

The command is not executed.

User response

Either reissue the command without the WAIT parameter or else reissue the command from an administrator using an Administrative Client.

ANR20 Command:
44E Invalid option's
value - Option's
value.

Explanation

The set option command has been entered with an invalid value.

System action

The server does not process the command.

User response

Reissue the command with a valid value.

ANR20 Command: An
45E error (error
code) occurred
during a write
operation.

Explanation

The server detects an error while attempting a write operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the write operation has failed.

ANR20 optionset name:
46I Optionset
optionset name
defined.

Explanation

The requested option set has been added to the system in response to a DEFINE OPTIONSET command.

System action

None.

User response

None.

ANR20 Command:
47E Optionset
optionset name
is already
defined.

Explanation

A DEFINE OPTIONSET command has been entered that specifies an optionset name already defined to the server.

System action

The server does not process the command.

User response

To define the optionset, reissue the command and specify a different optionset name.

ANR20 Command:
48I Optionset
optionset name
deleted.

Explanation

The requested option set has been deleted from the system in response to a DELETE OPTIONSET command.

System action

None.

User response

None.

ANR20 Command:
49E Optionset
optionset name
is not defined.

Explanation

The command shown specifies an optionset that is not defined in the server.

System action

The server does not process the command.

User response

None.

ANR20 Command:
50I Option option
name defined in
optionset option
set name.

Explanation

The requested option has been added to the specified optionset in response to a DEFINE OPTIONSET command.

System action

None.

User response

None.

ANR20 Command:
51E Option option
name, sequence
number
sequence
number is
already defined
in optionset
option set name.

Explanation

The requested option already exists in the optionset specified by the DEFINE CLIENTOPT command.

System action

The server does not process the command.

User response

None.

ANR20 Command:
52E **Option** *option name, sequence number sequence number is not defined in optionset option set name.*

Explanation

The requested option is not defined in the optionset specified by the DELETE CLIENTOPT command.

System action

The server does not process the command.

User response

None.

ANR20 Command:
53I **Option** *option name, sequence number sequence number, has been deleted from optionset option set name.*

Explanation

The requested option has been deleted from the specified optionset in response to a DELETE CLIENTOPT command.

System action

None.

User response

None.

ANR20 Command:
54I **Optionset** *optionset name updated.*

Explanation

The requested option set has been updated in the system in response to an UPDATE OPTIONSET command.

System action

None.

User response

None.

ANR20 Command:
55I **Optionset** *source optionset name copied to optionset target optionset name.*

Explanation

This message is displayed in response to the COPY OPTIONSET command. The optionset named *source optionset name* has been copied to the optionset named *target optionset name*.

System action

Server operation continues.

User response

None. The requested option set has been added to the system in response to a COPY OPTIONSET command.

ANR20 Command:
56E **Invalid option** *name - option*

name. Retry using the full optionname.

Explanation

The command shown specifies an invalid option name.

System action

The server does not process the command.

User response

Reissue the command with a valid option name.

ANR20 Command:
57E **Invalid option** *value - option value.*

Explanation

The command shown specifies an invalid option value.

System action

The server does not process the command.

User response

Reissue the command with a valid option value.

ANR20 Command:
58W **Options file** *Filespec not found - user needs to update the file manually.*

Explanation

The server options file cannot be opened or found.

System action

The command is processed but the option

is not updated in the options file.

User response

Use a text editor to update the server options file if the user wants to use this value when the server restarts later. If the user does not update the file, the current value in the options file will be used when the server restarts.

ANR20 Command: Error
59W **occurs when** *writing to Filespec - user needs to update the file manually.*

Explanation

An error occurs when trying to write the new value to the server options file.

System action

The command is processed but the option is not updated in the options file.

User response

Use a text editor to update the server options file if the user wants to use this value when the server restarts later. If the user does not update the file, the current value in the options file will be used when the server restarts.

ANR20 Node *node name*
60I **registered in** *policy domain domain name.*

Explanation

The requested backup-archive node has been added to the system in response to a REGISTER NODE command and has been assigned to the policy domain indicated.

System action

None.

User response

None.

ANR20 Node node name 61I removed from policy domain domain name.

Explanation

In response to a REMOVE NODE command, the requested backup-archive node has been removed from the system.

System action

None.

User response

None.

ANR20 Node node name 62I renamed to new node name.

Explanation

In response to a RENAME NODE command, the requested backup-archive node has been renamed to the new name shown.

System action

None.

User response

None.

ANR20 Node node name 63I updated.

Explanation

One or more attributes of a backup-archive node have been updated by an UPDATE NODE command.

System action

None.

User response

None.

ANR20 Node node name 64I locked.

Explanation

In response to a LOCK NODE command, the indicated backup-archive node has been locked.

System action

None.

User response

None.

ANR20 Node node name 65I is already locked.

Explanation

The indicated backup-archive node referenced in the LOCK NODE command is already locked.

System action

None.

User response

None.

ANR20 Node node name 66I unlocked.

Explanation

In response to an UNLOCK NODE command, the indicated backup-archive node is unlocked.

System action

None.

User response

None.

ANR20 Node node name 67I is already unlocked.

Explanation

The indicated backup-archive node referenced in the UNLOCK NODE command is not locked.

System action

None.

User response

None.

ANR20 Administrator 68I administrator ID registered.

Explanation

In response to a REGISTER ADMIN command, the requested administrator ID has been added to the system.

System action

None.

User response

None.

ANR20 Administrator 69I administrator ID removed.

Explanation

In response to a REMOVE ADMIN command, the requested administrator ID has been removed from the system.

System action

None.

User response

None.

ANR20 Administrator 70I administrator ID renamed to new administrator ID.

Explanation

In response to a RENAME ADMIN command, the requested administrator ID has been changed to the new name shown.

System action

None.

User response

None.

ANR20 Administrator 71I administrator ID updated.

Explanation

One or more attributes of an administrative user have been updated by an UPDATE ADMIN command.

System action

None.

User response

None.

**ANR20 Administrator
72I administrator ID
locked.**

Explanation

In response to a LOCK ADMIN command, the indicated administrator ID has been locked.

System action

None.

User response

None.

**ANR20 Administrator
73I administrator ID
is already
locked.**

Explanation

The indicated administrator ID referenced in the LOCK ADMIN command is already locked.

System action

None.

User response

None.

**ANR20 Administrator
74I administrator ID
unlocked.**

Explanation

In response to an UNLOCK ADMIN command, the indicated administrator ID is unlocked.

System action

None.

User response

None.

**ANR20 Administrator
75I administrator ID
is already
unlocked.**

Explanation

The indicated administrator ID referenced in the UNLOCK ADMIN command is not locked.

System action

None.

User response

None.

**ANR20 System
76I privilege
granted to
administrator
administrator
ID.**

Explanation

In response to a GRANT AUTHORITY command, system privilege class has been granted to the indicated administrator.

System action

None.

User response

None.

**ANR20 Unrestricted
77I policy privilege
granted to
administrator
administrator
ID.**

Explanation

In response to a GRANT AUTHORITY

command, unrestricted policy privilege has been granted to the indicated administrator.

System action

None.

User response

None.

**ANR20 Restricted
78I policy privilege
granted to
administrator
administrator ID
- policy domain
domain name.**

Explanation

In response to a GRANT AUTHORITY command, restricted policy privilege for the specified policy domain has been granted to the indicated administrator.

System action

None.

User response

None.

**ANR20 Unrestricted
79I storage
privilege
granted to
administrator
administrator
ID.**

Explanation

In response to a GRANT AUTHORITY command, unrestricted storage privilege has been granted to the indicated administrator.

System action

None.

User response

None.

**ANR20 Restricted
80I storage
privilege
granted to
administrator
administrator ID
- storage pool
storage pool
name.**

Explanation

In response to a GRANT AUTHORITY command, restricted storage privilege for the specified storage pool has been granted to the indicated administrator.

System action

None.

User response

None.

**ANR20 The
81E STGPOOLDIREC
TORY
STGPOOLDIREC
TORY in
STGPOOL
STGPOOL is full.**

Explanation

The operating system reported space problem with a directory.

System action

The write will be attempted to another directory.

User response

Ensure adequate storage is assigned to the storage pool directory or a next pool is defined.

ANR20 82I Operator privilege granted to administrator administrator ID.

Explanation

In response to a GRANT AUTHORITY command, operator privilege class has been granted to the indicated administrator.

System action

None.

User response

None.

ANR20 83I System privilege revoked for administrator administrator ID.

Explanation

In response to a REVOKE AUTHORITY command, system privilege class has been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 84I Policy privilege revoked for administrator administrator ID.

Explanation

In response to a REVOKE AUTHORITY command, policy privilege class for all policy domains has

been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 85I Restricted policy privilege revoked for administrator administrator ID - policy domain domain name.

Explanation

In response to a REVOKE AUTHORITY command, restricted policy privilege for the specified policy domain has been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 86I Storage privilege revoked for administrator administrator ID.

Explanation

In response to a REVOKE AUTHORITY command, storage privilege class for all storage pools has been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 87I Restricted storage privilege revoked for administrator administrator ID - storage pool storage pool name.

Explanation

In response to a REVOKE AUTHORITY command, restricted storage privilege for the storage pool indicated has been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 88E An I/O error occurred while reading container container name in storage pool storage pool name.

Explanation

One or more data extents cannot be accessed in the container.

System action

The operation fails and server operation continues. Depending upon the operation being performed, the data extent being accessed is marked damaged so it can be repaired.

User response

For more information about the I/O error, see the server's First Failure Data Capture (FFDC) log. Issue the AUDIT CONTAINER command to validate the contents of the container. If the AUDIT CONTAINER command detects damaged extents, repair the storage pool and retry the failing operation.

ANR20 89I Operator privilege revoked for administrator administrator ID.

Explanation

In response to a REVOKE AUTHORITY command, operator privilege class has been revoked from the indicated administrator.

System action

None.

User response

None.

ANR20 90I Activity log retention set to value for management by management style.

Explanation

The server activity log has been set to the value indicated with the SET ACTLOGRETENTION command for the indicated management style. If the management style is DATE, the value is the number of days

that messages will be kept in the activity log before being deleted. If the management style is SIZE, the value is the size in megabytes that the activity log will be allowed to occupy in the server database.

System action

None.

User response

None.

ANR20 Accounting 91I parameter set to *value*.

Explanation

Accounting record generation has been turned on or off as indicated with the SET ACCOUNTING command.

System action

None.

User response

None.

ANR20 Password 92I expiration period set to *number of days*.

Explanation

The number of days that a password can be used before it must be changed has been set to the value indicated with the SET PASSEXP command.

System action

None.

User response

None.

ANR20 Registration 93I parameter set to *registration method*.

Explanation

Backup-archive node registration has been set to the method indicated with the SET REGISTRATION command.

System action

None.

User response

None.

ANR20 Server name set 94I to *server name*.

Explanation

The name that the server displays and communicates to backup-archive nodes has been set to the value indicated with the SET SERVERNAME command.

System action

None.

User response

None.

ANR20 Authentication 95I parameter set to *value*.

Explanation

The requirement for a node or administrator to enter a password when establishing a session with the server has been turned on or off

as indicated with the SET AUTHENTICATION command.

System action

None.

User response

None.

ANR20 Server now 96I enabled for backup/archive client access.

Explanation

The server has been made available for use by backup-archive clients with the ENABLE command.

System action

None.

User response

None.

ANR20 Unable to 97E retrieve the master encryption key from the server password file, *password file name*.

Explanation

The master encryption key could not be read from the password file in which it was stored. The following list contains possible reasons:

- The password file was created by a different server instance.
- The password file was created before the database was formatted.

- The server password changed, and the password file was restored from a point in time prior to the change.

System action

Server initialization continues. Data stored in encrypted storage pools cannot be retrieved. New data cannot be written to encrypted storage pools.

User response

Confirm that the correct password file is present in the server's instance directory.

- If the server is not configured to encrypt data in storage pools either delete or rename the password file. Restart the server.
- If the server database was reformatted, either delete or rename the password file. Restart the server.
- If the server password changed, either restore the database to a point in time prior to the change, or reset the password back to the previous value.

ANR20 Command: 98E Invalid URL specification - *url*.

Explanation

The specified URL is too long.

System action

The server ignores the command.

User response

Reissue the command and enter a URL value that is 200 characters or less.

ANR20 Administrative 99I user ID *admininstrator name* defined for OWNER access to node *node name*.

Explanation

An administrator with the specified name was created having OWNER access to the client node. This administrator is created for accessing the client node from an interactive interface.

System action

None.

User response

None.

ANR21 Activity log 00I process has started.

Explanation

The automatic server process that removes expired server activity log records has begun processing.

System action

None.

User response

None.

ANR21 Activity log 01I process stopped, activity log

retention set to 0.

Explanation

A SET ACTLOGRETENTION command has set the retention period to zero days. As a result, activity logging stops.

System action

The activity log process stops recording console output in the server activity log.

User response

None.

ANR21 Activity log 02I pruning started: removing entries prior to *date time*.

Explanation

Server activity log records older than the date and time indicated are being removed from the activity log.

System action

None.

User response

None.

ANR21 Activity log 03I pruning completed: *number of records* records removed.

Explanation

All expired (older than the log archive retention value) server activity log records have been

removed; the number of records deleted is shown.

System action

None.

User response

None.

ANR21 Activity log 04I processing is now restarted.

Explanation

The process that records data in the server activity log had suspended logging messages because of insufficient space in the server recovery log or database or because access to the database failed. The condition that caused the activity log processing to fail has been resolved and the activity log processing is able to resume.

System action

Activity log processing resumes.

User response

None.

ANR21 Command: Node 05W was registered in excess of license terms - node registration will fail after 120% of the licensed quantity of nodes have been registered.

Explanation

The server has detected the addition of a node in excess of the terms

under which the server is licensed. The REGISTER NODE command will fail after 120% of the licensed number of nodes have been registered.

System action

Server operation continues.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance. You may remove nodes to reduce the number of registered nodes or purchase additional client node connections. If additional nodes have been purchased, issue the AUDIT LICENSES command to resynchronize the server configuration with license terms.

ANR21 Server HALT 06I command: Quiescing database update activity.

Explanation

The server is quiescing transactions that update the database so that the database is in a consistent state when the server is halted. This action occurs when HALT QUIESCE is specified to halt the server with the database in a consistent state.

System action

When database update transaction activity has been stopped, the server program ends.

User response

None.

ANR21 Server HALT 07I *command:*
Database update activity is now quiesced.

Explanation

The server has stopped all database update transaction activity. This action occurs when HALT QUIESCE is specified to halt the server with the database in a consistent state.

System action

The server program ends.

User response

None.

ANR21 Server HALT 08I *command:*
Reattempting to quiesce database update activity.

Explanation

The server is quiescing transactions that update the database so that the database is in a consistent state when the server is halted. The previous attempt at quiescing database activity failed because of the current transaction load on the server. The quiesce operation is being reattempted. This action occurs when HALT QUIESCE is specified to halt the server with the database in a consistent state.

System action

When database update transaction activity has been stopped, the server program ends.

User response

None.

ANR21 Server HALT 09I *command:*
Database update transaction activity could not be successfully quiesced.

Explanation

After repeated attempts, server database update transaction activity could not be quiesced. The server is not halted with the HALT QUIESCE command. Attempts to quiesce database update transaction activity can fail if heavy transaction load is on the server when a HALT QUIESCE command is entered.

System action

Server operation continues.

User response

You may disable the server, cancel all client sessions accessing the server, cancel all processes, and reenter the HALT QUIESCE command to stop server processing. The HALT command may also be used to stop server processing without quiescing database transaction update activity. Server recovery

logic will be used when the server is restarted to reconcile database transaction activity.

ANR21 Command 10I *started as process process ID.*

Explanation

A background process has been started to service the command *command*. The background process is defined as process *process ID*.

System action

The server processes the indicated command.

User response

To query the progress of the background process, use the QUERY PROCESS command. To cancel the background process, use the CANCEL PROCESS command. Use the *process ID* number to specify this process.

ANR21 Command: 11W *There is no data to process for storage pool.*

Explanation

The indicated command does not have any data to process. This can occur if the command specifies a storage pool with no volumes, or with no volumes that contain data. This can also occur if there are no volumes in the storage pool with an access state of READWRITE or READONLY.

System action

The command ends without starting a background process.

User response

Issue the QUERY VOLUME F=D command to verify that there is at least one volume in the storage pool that contains data, and that the storage pool volumes have an access state of READWRITE or READONLY.

ANR21 Command: 12E *Volume volume name is not in a primary storage pool.*

Explanation

The command indicated specifies the name of a volume that does not belong to a primary storage pool. The command syntax requires that a volume in a primary storage pool be specified.

System action

The server does not process the command.

User response

Reissue the command with a volume in a primary pool.

ANR21 Command: 13E *Volume volume name does not belong to the same storage pool (storage pool name) as previously listed volumes.*

Explanation

The indicated command accepts a list of one or more volumes which belong to the same storage pool. The named volume does not belong to the same storage pool as the previously listed volumes.

System action

The server does not process the command.

User response

Issue the command with a list of volumes that belong to the same storage pool.

ANR21 Command: 14I Access mode for volume *volume name* updated to "destroyed".

Explanation

A RESTORE VOLUME command has updated the access mode of the indicated volume to destroyed.

System action

Restore processing continues.

User response

None.

ANR21 Command: 15E Access mode for volume *volume name* cannot be changed to "destroyed" - volume is still online.

Explanation

A RESTORE VOLUME command cannot change the access mode of the indicated volume to destroyed because the volume is still online.

System action

The server does not process the command.

User response

Issue the VARY OFFLINE command, and reissue the RESTORE VOLUME command.

ANR21 Command: 16E Access mode for volume *volume name* cannot be changed to "destroyed" - volume does not belong to a primary storage pool.

Explanation

The access mode for the indicated volume cannot be changed to destroyed because the volume does not belong to a primary storage pool.

System action

The access mode for this volume is not changed.

User response

None.

ANR21 Command: 17E Access mode for volume *volume name* cannot be changed to "offsite" - volume either does not belong to a copy

storage pool or from a device class of **DEVTYPE=SERVER**.

Explanation

The access mode for the indicated volume cannot be changed to offsite because the volume either does not belong to a copy storage pool or is of a device class with a DEVTYPE of SERVER.

System action

The access mode for this volume is not changed.

User response

None.

ANR21 Storage pool 18E *storage pool name* specified on the MOVE DATA command is not a valid poolname and or pooltype for volume *volume name*.

Explanation

If the volume belongs to a primary storage pool, then the storage pool specified must also be a primary storage pool. If the volume belongs to a copy storage pool, then the specified storage pool must be the same storage pool as that of the volume.

System action

The MOVE DATA process fails.

User response

Provide a valid primary storage pool name if the volume belongs to a primary storage pool. If the volume belongs to a copy storage pool, remove the storage pool name from the command.

ANR21 The Option 19I option has been changed in the options file.

Explanation

The option is updated in the server options file.

System action

Server continues.

User response

None.

ANR21 Command: 20E Invalid platform name - *platform name*.

Explanation

The command shown specifies an invalid platform name.

System action

The server does not process the command.

User response

Reissue the command with a valid platform name.

ANR21 ATTENTION: 21W More than *amount* changed unit megabytes, gigabytes or terabytes of the database has changed and the

last database backup was more than *hours name* hours ago. Use the **BACKUP DB** command to provide for database recovery.

Explanation

The server issues this warning when a significant amount of database change activity has occurred and the server database has not been backed up.

System action

Server operation continues.

User response

To provide for server database recovery should a hardware or software problem affect your database, use the **BACKUP DB** command to back up the database.

ANR21 command name: 22E The **DOMAINS** parameter cannot be specified when the **NODES** parameter is specified.

Explanation

Both the **NODES** and **DOMAINS** parameters were specified. The **NODES** parameter may be specified, or the **DOMAINS** parameter may be specified, but both should not be specified at the same time.

System action

The command fails.

User response

Reenter the command specifying either the **NODES** parameter or the **DOMAINS** parameter, but not both.

ANR21 command name: 23E The **NODES** parameter cannot be specified when the **DOMAINS** parameter is specified.

Explanation

Both the **NODES** and **DOMAINS** parameters were specified. The **NODES** parameter may be specified, or the **DOMAINS** parameter may be specified, but both should not be specified at the same time.

System action

The command fails.

User response

Reenter the command specifying either the **NODES** parameter or the **DOMAINS** parameter, but not both.

ANR21 command name: 24E Invalid Client authority specified: *authority*.

Explanation

An invalid client authority was specified in a **GRANT AUTHORITY** or **REVOKE AUTHORITY** command when the **CLASS=NODE** parameter was specified.

System action

The command fails.

User response

Reenter the command specifying a valid client authority.

ANR21 command name: 25I Administrator administrator name was granted **OWNER** authority for client *client name*.

Explanation

The named administrator was granted **OWNER** authority over the named client node as the result of a **GRANT AUTHORITY** command.

System action

Processing continues.

User response

None.

ANR21 command name: 26I Administrator administrator name was granted **ACCESS** authority for client *client name*.

Explanation

The named administrator was granted **ACCESS** authority over the named client node as the result of a **GRANT AUTHORITY** command.

System action

Processing continues.

User response

None.

ANR21 command name: 27I Owner authority for node *client node* was revoked for administrator administrator.

Explanation

OWNER authority over the named client node was revoked from the named administrator as a result of a **REVOKE AUTHORITY** command.

System action

Processing continues.

User response

None.

ANR21 command name: 28I Access authority for node *client node* was revoked for administrator administrator.

Explanation

ACCESS authority over the named client node was revoked from the named administrator as a result of a **REVOKE AUTHORITY** command.

System action

Processing continues.

User response

None.

ANR21 Administrative 29I userid administrator name defined **ONLY** for

authority over node *node name* has been removed.

Explanation

The specified administrator has been removed because the client node was removed and the administrator only had OWNER access to the specified node.

System action

None.

User response

None.

ANR21 Early Product 30S Version has Expired. Server is HALTing.

Explanation

This server is pre-release version of the server. The pre-release version's expiration date has been reached.

System action

The server halts.

User response

Install the product version of the server.

ANR21 Server 31I password set.

Explanation

The password that the server uses to allow other servers to communicate with it has been set, changed or removed with the SET SERVERPASSWORD command.

System action

None.

User response

None.

ANR21 Server 32I hladdress set to hladdress.

Explanation

The high level address that other servers use to communicate with this server has been set to the value indicated with the SET SERVERHLADDRESS command.

System action

None.

User response

None.

ANR21 Server lladdress 33I set to lladdress.

Explanation

The low level address that other servers use to communicate with this server has been set to the value indicated with the SET SERVERLLADDRESS command.

System action

None.

User response

None.

ANR21 Server url set to 34I url.

Explanation

The url that other servers use to communicate with this server has been set

to the value indicated with the SET SERVERURL command.

System action

None.

User response

None.

ANR21 Crossdefine set 35I to state.

Explanation

The ability for another server to automatically define itself to this server has been turned on or off as indicated with the SET CROSSDEFINE command.

System action

None.

User response

None.

ANR21 Administrator 36I administrator name already has POLICY access for domain policy domain name.

Explanation

The named administrator already has POLICY authority over the named policy domain. An attempt to grant client authority over this domain is ignored.

System action

The policy domain is skipped.

User response

None.

ANR21 Administrator 37I administrator name already has POLICY access for domain policy domain name to which node node name belongs.

Explanation

The named administrator already has POLICY authority over the named policy domain. An attempt to grant client authority for a client in this domain is ignored.

System action

The client is skipped.

User response

None.

ANR21 Minimum 38I password length set to length.

Explanation

The minimum length of a password a node or administrator may send to the server is indicated with the SET MINPWLENGTH command.

System action

None.

User response

None.

ANR21 Command: The 39E value supplied for the minimum password length is not valid - length.

Explanation

A SET MINPWLENGTH command has been entered that specifies a value for the length is not valid. Valid values are from 0 to 58, inclusive.

System action

The server does not process the command.

User response

Reissue the command with a valid value.

ANR21 Command: 40E Invalid activity log retention period - retention value.

Explanation

A SET ACTLOGRETENTION command has been entered that specifies an invalid log retention period.

System action

The server does not process the command.

User response

Reissue the command with a valid retention period.

ANR21 Command: 41E Invalid password expiration period - days value.

Explanation

A SET PASSEXP command has been entered that specifies an invalid days value.

System action

The server does not process the command.

User response

Reissue the command with a password expiration period.

ANR21 Command: 42E Invalid server name - server name.

Explanation

A SET SERVERNAME command has been entered that specifies an invalid server name.

System action

The server does not process the command.

User response

Reissue the command with a valid server name.

ANR21 Command: 43E Invalid node name - node name.

Explanation

The command shown specifies an invalid node name.

System action

The server does not process the command.

User response

Reissue the command with a valid node name.

ANR21 Command: 44E Invalid password - password.

Explanation

The command specifies an invalid node or administrator password.

System action

The server does not process the command.

User response

Ensure that the password adheres to naming convention rules and meets the minimum password length requirement as set by your administrator. Ensure that the new password is different from the old password. If you are authenticating to an LDAP directory server ensure that the new password meets all other password policy rules specified by the LDAP directory server. Reissue the command with a valid password.

ANR21 Command: 45E Contact information exceeds maximum characters characters.

Explanation

A REGISTER NODE or REGISTER ADMIN command has been entered that specifies a contact information value that is too long. The maximum valid length is shown in the command.

System action

The server does not process the command.

User response

Reissue the command with less contact information.

ANR21 Command: Node 46E node name is not registered.

Explanation

The command shown specifies a node that is not registered with the server.

System action

The server does not process the command.

User response

None.

ANR21 Command: Node 47E node name is already registered.

Explanation

A REGISTER NODE command has been entered that specifies a node name already registered with the server.

System action

The server does not process the command.

User response

To register the node, reissue the command and specify a different node name.

ANR21 Command: 48E Administrator administrator ID is not registered.

Explanation

The command shown specifies an administrator ID that is not registered with the server.

System action

The server does not process the command.

User response

None.

ANR21 Command:
49E Administrator administrator ID is already registered.

Explanation

A REGISTER ADMIN command has been entered that specifies an administrator ID already registered with the server.

System action

The server does not process the command.

User response

To register the administrator, reissue the command and specify a different administrator ID.

ANR21 Command: Node
50E node name is currently accessing the server.

Explanation

The command shown specifies a node that has an active session with the server.

System action

The server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current session and reissue the command.

ANR21 Command:
51E Administrator administrator ID is currently accessing the server.

Explanation

An UPDATE ADMIN or REMOVE ADMIN command has been entered that specifies an administrator ID that is having an active session with the server.

System action

The server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current session and reissue the command.

ANR21 Command:
52E Inventory references still exist for node node name.

Explanation

A REMOVE NODE command has been entered for a node for which the server is still storing backup or archive data, or both.

System action

The server does not process the command.

User response

To remove the node, delete all of its file spaces and any virtual file space mapping definitions from the server and reissue the command.

ANR21 Command:
53E Invalid file space name - filespace name.

Explanation

The specified server command has been entered with a file space name that is longer than allowed. Note that the maximum length of a unicode file space name is eight characters less than the maximum length of a non-unicode file space name.

System action

The server does not process the command.

User response

Reissue the command with a valid file space name.

ANR21 Command:
54E Invalid administrator name - administrator ID.

Explanation

The command shown specifies an invalid administrator ID.

System action

The server does not process the command.

User response

Reissue the command with a valid administrator ID.

ANR21 Command:
55E Invalid privilege class - privilege class.

Explanation

A command specifies an invalid administrative privilege class.

System action

The server does not process the command.

User response

Reissue the command with a valid privilege class.

ANR21 Command:
56E Administrator administrator ID has already been granted system privilege.

Explanation

A GRANT AUTHORITY command has been issued to grant system authority to an administrator ID that already has system authority.

System action

The server does not process the command.

User response

None.

ANR21 Command:
57E Other privileges cannot be granted with

system privilege.	specified for unrestricted storage administrator administrator ID.	administrator ID.	instance, the server console administrator ID cannot be removed.
Explanation A GRANT AUTHORITY command has been issued to grant system authority to an administrator ID, and at the same time to grant other privileges.	Explanation A REVOKE AUTHORITY command has been issued to revoke an administrator's storage authority over a specific storage pool, but the administrator has unrestricted storage authority.	Explanation A REVOKE AUTHORITY command has been issued to revoke one or more of an administrator's privileges, but the administrator has system authority.	System action The server does not process the command.
System action The server does not process the command.	System action The server does not process the command.	System action The server does not process the command.	User response None.
User response Reissue the GRANT AUTHORITY command specifying only system privilege class.	User response The server does not process the command.	User response None.	ANR21 64E Command: Command rejected - administrator ID is the only system administrator.
ANR21 58E Command: Policy domains cannot be specified for unrestricted policy administrator administrator ID.	ANR21 60E Command: No new privileges granted to administrator administrator ID.	ANR21 62E Command: No privileges revoked for administrator administrator ID.	Explanation A REMOVE ADMIN or REVOKE AUTHORITY command has been issued to remove or revoke the authority of the last administrator who had system authority.
Explanation A REVOKE AUTHORITY command has been issued to revoke an administrator's policy authority over a specific policy domain, but the administrator has unrestricted policy authority.	Explanation A GRANT AUTHORITY command has been issued to grant authority to an administrator ID, but the administrator already has all privileges specified.	Explanation A REVOKE AUTHORITY command has been issued to revoke authority from an administrator ID, but the administrator does not have any of the privileges specified.	System action The server does not process the command.
System action The server does not process the command.	System action The server does not process the command.	System action The server does not process the command.	User response To remove or revoke this ID, grant system authority to another administrator ID before reissuing the command.
User response None.	User response None.	User response None.	ANR21 65E Command: Invalid begin date - date.
ANR21 59E Command: Storage pools cannot be	ANR21 61E Command: Only system privilege can be revoked for administrator	ANR21 63E Command: Command is invalid for administrator ID.	Explanation A QUERY ACTLOG command has been entered that specifies an invalid begin date as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid begin date.

ANR21 Command:
66E Invalid begin time - time.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid begin time as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid begin time.

ANR21 Command:
67E Invalid end date - date.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid end date as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid end date.

ANR21 Command:
68E Invalid end time - time.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid end time as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid end time.

ANR21 Command:
69E Invalid message number - message number.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid message number as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid message number.

ANR21 Command:
70E Invalid message search string argument - search string.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid search string as a search criteria.

System action

The server does not process the command.

User response

Reissue the command with a valid search string.

ANR21 Command:
71E Invalid time range - Begin: date time End: date time.

Explanation

A QUERY ACTLOG command has been entered that specifies an invalid beginning and ending date/time range. This error can occur when the beginning date/time is not before the ending date/time.

System action

The server does not process the command.

User response

Reissue the command with a valid date/time range.

ANR21 Command:
72E No matching administrators.

Explanation

The command shown specified an administrator ID that does not match any administrator registered with the server.

System action

The command is not executed.

User response

If desired, reissue the command with a different administrator ID.

ANR21 Command:
73E Location information exceeds maximum characters.

Explanation

A DEFINE or UPDATE VOLUME command has been entered that specifies a location information value that is too long. The maximum valid length is shown in the command.

System action

The server does not process the command.

User response

Reissue the command with less location information.

ANR21 Administrator administrator ID is not registered. Schedule schedule name is not processed and is marked as failed.

Explanation

The command shown specifies an administrator ID that is not registered with the server. The schedule and related command are not processed.

System action

The server does not process the command.

User response

Update the command schedule with a valid administrator ID which has the proper authority to execute the scheduled command.

**ANR21 Invalid
75I password limit
set to password
attempts limit
attempts.**

Explanation

The maximum number of consecutive invalid passwords a node or administrator may send to the server is indicated with the SET INVALIDPWLIMIT command.

System action

None.

User response

None.

**ANR21 Command: The
76E value supplied
for the invalid
password
attempts limit is
not valid -
password
attempts limit.**

Explanation

A SET INVALIDPWLIMIT command has been entered that specifies a value for the consecutive invalid password attempts limit that is not valid. Valid values are from 0 to 9999, inclusive.

System action

The server does not process the command.

User response

Reissue the command with a valid value.

**ANR21 node/admin
77I name has count
invalid sign-on
attempts. The
limit is limit.**

Explanation

The server detected an invalid password for the specified node during sign-on processing. The node currently has sent *count* consecutive invalid passwords. The maximum allowed is *limit*. The server will lock the node when *limit* is reached.

System action

The node or administrator session will be refused.

User response

Before the client node is permitted to access the server, a properly authorized administrator must unlock the node or administrator with the UNLOCK NODE or UNLOCK ADMIN command.

**ANR21 node/admin
78E name has been
locked. Invalid
sign-on attempt
limit (limit)
reached.**

Explanation

The specified node has been locked by the server. The limit

for consecutive invalid passwords has been reached.

System action

The node or administrator session will be refused.

User response

Before the client node is permitted to access the server, a properly authorized administrator must unlock the node or administrator with the UNLOCK NODE or UNLOCK ADMIN command.

**ANR21 Administrator
79E administrator
should have
been locked,
but was not.**

Explanation

The indicated administrator reached the limit for consecutive invalid passwords and should have been locked. If it were locked, there would be no means to execute commands requiring system authority.

System action

The administrator session will be refused.

User response

Sign-on again using the correct password.

**ANR21 Unable to
80W update last
access date for
administrator
administrator ID
- insufficient
recovery log
space.**

Explanation

While establishing an administrative session for the indicated ID, the server is unable to update the administrator's date of last access due to insufficient recovery log space.

System action

The server establishes the administrative session, but the last access date is not updated.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR21 81W Unable to update last access date for administrator administrator ID - insufficient database space.

Explanation

While establishing an administrative session for the indicated ID, the server cannot update the administrator's date of last access due to insufficient database space.

System action

The server establishes the administrative session, but the last access date is not updated.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR21 82W Unable to update last access date for administrator administrator ID - internal server error.

Explanation

While establishing an administrative session for the indicated ID, the server cannot update the administrator's date of last access due to a server internal error.

System action

The server establishes the administrative session, but the last access date is not updated.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR21 83W Diagnostic(ID): Transaction transaction ID was aborted.

Explanation

An error was detected during transaction commit that caused this transaction to be aborted. This message may have been preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If this was encountered while the server was halting then this can be ignored. During server HALT processing, existing in-flight transactions may

be aborted as a normal part of server shutdown processing. If the error cannot be isolated and resolved, contact your service representative.

ANR21 84W Diagnostic(ID): Transaction transaction ID was aborted for command command.

Explanation

An error was detected during transaction commit for the specified server command. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 85W Transaction was aborted for command command.

Explanation

An error was detected during transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 86W Transaction was aborted for session session number for node node name (client platform).

Explanation

An error was detected during transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 87W Transaction was aborted for node/admin name.

Explanation

An error is detected during a transaction

commit for the specified node or administrator name. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 88W A Transaction was aborted. The activity is terminating.

Explanation

An error is detected during a transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error ends.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 89W Diagnostic(ID): Transaction

transaction ID was aborted for node/admin name.

Explanation

An error is detected during a transaction commit for the specified node or administrator name. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The activity that generated this error fails.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR21 90E command: Device class DISK cannot be specified for this command.

Explanation

The DEVCLASS value DISK cannot be specified for the command.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid device class. Issue the QUERY DEVCLASS command for

a list of valid device classes for the server.

ANR21 91E command: Volume list contains defined and undefined volumes.

Explanation

The list of volumes specified on the SALVAGE VOLUME command must all be defined to the server, or all not defined to the server.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid list of volumes.

ANR21 92E Command: Unable to start background process.

Explanation

The server command processor is not able to start a background process to perform the command *command*.

System action

The command process ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR21 93E Command: Invalid option set name - option set name.

Explanation

The command shown specifies an invalid option set name.

System action

The server does not process the command.

User response

Reissue the command with a valid option set name.

ANR21 94E Command: Invalid option set description - too long.

Explanation

The command shown specifies an invalid description. The description is too long.

System action

The server does not process the command.

User response

Reissue the command with a valid description.

ANR21 95E Command: Invalid option sequence number - option sequence number name.

Explanation

The command shown specifies an invalid option sequence number.

System action

The server does not process the command.

User response

Reissue the command with a valid option sequence number.

ANR21 96W An existing server password file, *password file name*, was found during a database format operation. It was renamed to *new password file name*.

Explanation

A password file already exists. The file cannot be used by the new instance of the server database. You might need it later, however, if the database is restored to an earlier point in time.

System action

The password file was renamed.

User response

If the database will be restored to an earlier point in time, save the renamed password file. After the database is restored, rename the password file to 'dsmserv.pwd' and place it in the server instance directory.

ANR21 97E Command: The value supplied for the WEB authentication time out is not valid - *time-out value*.

Explanation

A SET WEBAUTHTIMEOUT command has been entered that specifies a value that is not valid. Valid values are from 0 to 9999, inclusive.

System action

The server does not process the command.

User response

Reissue the command with a valid value.

ANR21 98I Command: Web authentication time-out set to *time-out value* minutes.

Explanation

The time-out value that determines how often WEB browser administrative users need to re-authenticate with the server has been set with the SET WEBAUTHTIMEOUT command to the value displayed.

System action

None.

User response

None.

ANR21 99I Password expiration period for node *node name* set to *number of days* days.

Explanation

The number of days that the node's password can be used before it must

be changed has been set to the value indicated with the SET PASSEXP command.

System action

None.

User response

None.

ANR22 00I Storage pool *storage pool name* defined (device class *device class name*).

Explanation

A DEFINE STGPOOL command has created the storage pool indicated of the device class shown.

System action

None.

User response

None.

ANR22 01I Storage pool *storage pool name* deleted.

Explanation

A DELETE STGPOOL command has deleted the storage pool indicated.

System action

None.

User response

None.

ANR22 02I Storage pool *storage pool name* updated.

Explanation

An UPDATE STGPOOL command has updated the storage pool indicated.

System action

None.

User response

None.

ANR22 03I Device class *device class name* defined.

Explanation

A DEFINE DEVCLASS command has created the device class indicated.

System action

None.

User response

None.

ANR22 04I Device class *device class name* deleted.

Explanation

A DELETE DEVCLASS command has deleted the device class indicated.

System action

None.

User response

None.

ANR22 05I Device class *device class name* updated.

Explanation

An UPDATE DEVCLASS command has updated

the device class indicated.

System action

None.

User response

None.

ANR22 Volume *volume name* defined in storage pool *storage pool name* (device class *device class name*).

Explanation

A DEFINE VOLUME command has defined the volume indicated in the storage pool shown that belongs to the device class shown.

System action

None.

User response

None.

ANR22 Volume *volume name* updated.

Explanation

An UPDATE VOLUME command has updated the volume indicated.

System action

None.

User response

None.

ANR22 Volume *volume name* deleted from storage pool *storage pool name*.

Explanation

The volume indicated has been deleted by one of the following:

- A DELETE VOLUME command was issued.
- The volume was empty and the volume's access mode was updated to destroyed.
- The volume was empty, scratch, and offsite, and the access mode was changed to readwrite, readonly, or unavailable.
- The volume was scratch, not offsite, and was emptied by DELETE FILESPACE, RECLAMATION, or RESTORE VOLUME/STGPOOL.
- The volume was an empty scratch WORM FILE volume and deleted by RECLAMATION since the retention of the volume has expired.

System action

None.

User response

None.

ANR22 Volume *volume name* contains no data.

Explanation

The AUDIT VOLUME or MOVE DATA command entered specifies a volume that contains no data.

System action

The server does not process the command.

User response

None.

ANR22 Vary online initiated for disk volume *volume name*.

Explanation

A VARY ONLINE command for the volume shown is being processed, and if no errors occur the volume will be varied online.

System action

None.

User response

None.

ANR22 Vary offline initiated for disk volume *volume name*.

Explanation

A VARY OFFLINE command for the volume shown is being processed and, if no errors occur, the volume will be varied offline.

System action

None.

User response

None.

ANR22 Command: No volumes updated.

Explanation

An UPDATE VOLUME command has been entered, but no objects were updated.

System action

None.

User response

None.

ANR22 Command: Storage pool *storage pool name* renamed to *storage pool name*.

Explanation

A RENAME STGPOOL command has been entered. The rename of the storage pool was successful.

System action

None.

User response

None.

ANR22 Command: Invalid backup set name - *backup set name*.

Explanation

The command shown specifies an invalid backup set name.

System action

The command fails.

User response

Reissue the command with a valid backup set name.

ANR22 Command: Description text is too long.

Explanation

The specified description text is too long for a command that allows description text to be specified.

System action

The command fails

User response

Reissue the command specifying a shorter description

ANR22 Command: 16E Device class must be a sequential device class.

Explanation

The device class specified on the command is not a sequential device class.

System action

The command fails

User response

Reissue the command specifying the name of a sequential device class

ANR22 Command: 17E Invalid backup set retention period - retention value.

Explanation

Server processing for the backup set command *command* fails because the value (*retention value*) specified for the RETENTION parameter is not valid.

System action

The command fails

User response

Reissue the command specifying a valid RETENTION value.

ANR22 Command: A 18E device class must be specified.

Explanation

The DEVCLASS parameter is not specified in the command *command name*. A DEVCLASS value must be specified.

System action

The command fails.

User response

Reissue the command specifying a valid device class. Issue the QUERY DEVCLASS command for a list of valid device classes for the server.

ANR22 Command: 19E Storage pool cloud url exceeds 870 characters.

Explanation

The command indicated contains a storage pool cloud url that exceeds the maximum length allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool cloud url.

ANR22 This command 20W will delete volume *volume*

name from its storage pool after verifying that the volume contains no data.

Explanation

A DELETE VOLUME command with the Discarddata=No option has been entered.

System action

The system asks whether you wish to continue with the command.

User response

To process the DELETE VOLUME command, enter 'Y' to continue or 'N' to stop the process.

ANR22 This command 21W will result in the deletion of all inventory references to the data on volume *volume name*, thereby rendering the data unrecoverable. If the volume being deleted contains deduplicated data, the server invalidates all files that reside in the storage pool that are dependent upon the data stored on this volume. Files on other volumes might be marked as damaged and result in warning messages when

that data is accessed.

Explanation

A DELETE VOLUME command with the Discarddata=Yes option has been entered.

System action

The system asks whether you wish to continue with the command.

User response

To process the DELETE VOLUME command, enter 'Y' to continue or 'N' to stop the process.

ANR22 Discard Data 22I process started for volume *volume name* (process ID *process ID*).

Explanation

As a result of a DELETE VOLUME command with the Discarddata=Yes option, the process whose ID is displayed has begun to delete the data on the volume shown.

System action

The server deletes the data on the volume.

User response

None.

ANR22 Discard Data 23I process ended for volume *volume name* - volume deleted from storage pool *storage pool name*.

Explanation

The process that deleted data for the volume shown has ended, and the volume has been deleted.

System action

None.

User response

None.

ANR22 Discard Data 24W process terminated for volume *volume name* - process canceled.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has been canceled.

System action

The server does not delete the volume.

User response

None.

ANR22 Discard Data 25W process terminated for volume *volume name* - volume still contains data.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has ended. However, the volume contains data.

System action

The server does not delete the volume.

User response

Contact your service representative.

ANR22 Discard data 26W process terminated for volume *volume name* - sufficient recovery log space is not available.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has ended due to a shortage of recovery log space.

System action

The server does not delete the volume.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY

location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR22 Discard data 27W process terminated for volume *volume name* - sufficient memory is not available.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has ended due to a shortage of memory.

System action

The server does not delete the volume.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR22 Discard data 28W process terminated for volume *volume name* - lock conflict detected.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has ended due to a locking conflict.

System action

The server does not delete the volume.

User response

Reissue the command at a later time. If this problem persists, contact your service representative.

ANR22 Discard data 29W process terminated for volume *volume name* - internal server error detected.

Explanation

The process that was deleting data for the volume shown, in preparation for deleting the volume, has ended due to a server internal error.

System action

The server does not delete the volume

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages that indicate the source of the error.

ANR22 32W This command will move all of the data stored on volume *volume name* to other volumes within the same storage pool; the data will be inaccessible to users until the operation completes.

Explanation

A move data has been entered that will move data from the indicated volume to other volumes in the same storage pool. While the data is being moved, it will not be available to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to end the process.

ANR22 33W This command will move all of the data stored on volume *volume name* to other volumes in storage pool *storage pool name*; the data will be inaccessible to users until the operation completes.

Explanation

A move data has been entered that will move data from the indicated volume to volumes in

the storage pool shown. While the data is being moved it will not be available to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to end the process.

ANR22 34W This command will halt the server; if the command is issued from a remote client, it may not be possible to restart the server from the remote location.

Explanation

A HALT command has been entered.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to halt the server or 'N' to leave the server activated.

ANR22 35W This command will remove administrator *adminName*. This administrator has defined or updated schedules. Removing this authority WILL cause these

schedules to fail.

Explanation

A REMOVE ADMINISTRATOR command has been entered for an administrator that owns administrative schedules. If you confirm that you want to proceed with this command, the schedules owned by this administrator will fail when executed in the future.

System action

The system asks whether you wish to continue with the command.

User response

To process the REMOVE ADMINISTRATOR command, enter 'Y' to continue or 'N' to stop the process. To deal with schedules owned by the administrator, use the QUERY SCHEDULE command OR an SQL SELECT statement on the ADMIN_SCHEDULES table to determine which schedules were last updated by the administrator. Use the UPDATE SCHEDULE command to update those schedules under an administrator that has authority to execute them, or use the DELETE SCHEDULE command to remove the schedules.

ANR22 36W This command has removed administrator *adminName*. This administrator has defined or

updated schedules. This WILL cause these schedules to fail in the future.

Explanation

A REMOVE ADMINISTRATOR command has been entered and the administrator removed owns administrative schedules. The schedules will fail when executed in the future because they do not belong to a valid administrator.

System action

The system removes the administrator.

User response

Use the QUERY SCHEDULE command OR an SQL SELECT statement on the ADMIN_SCHEDULES table to determine which schedules were last updated by the administrator. Use the UPDATE SCHEDULE command to update those schedules under an administrator that has authority to execute them, or use the DELETE SCHEDULE command to remove the schedules.

ANR22 37W This command has revoked privileges for administrator *adminName*. This administrator has defined or updated schedules. This may cause these schedules

to fail in the future.

Explanation

A REVOKE AUTHORITY command has been entered.

System action

The system removes the authority.

User response

None.

ANR22 38W This command will result in the deletion of all inventory references to the data on filespaces that match the pattern *filepace name* for node *node name*, thereby rendering the data unrecoverable.

administrator has defined or updated schedules. Revoking this authority may cause schedules to fail.

Explanation

A REVOKE AUTHORITY command has been entered.

System action

The system asks whether you wish to continue with the command.

User response

To process the REVOKE AUTHORITY command, enter 'Y' to continue or 'N' to stop the process.

ANR22 40E Command: Storage pool cloud identity exceeds 255 characters.

Explanation

The command indicated contains a storage pool cloud password that exceeds the maximum length allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool cloud password.

ANR22 42E Command: The cloud url for the cloud storage pool contains no information.

Explanation

There is no valid cloud url in this command.

System action

The IBM Storage Protect server does not process the command.

User response

Reissue the command with a valid cloud url.

ANR22 43E Command: Provide the cloud storage pool identity.

Explanation

A cloud storage pool identity is necessary for this command.

System action

The IBM Storage Protect server does not process the command.

User response

Reissue the command with a valid cloud storage pool identity.

ANR22 44I Activity Summary pruning started: removing entries prior to *date time*.

Explanation

Server activity summary records older than the date and time indicated are being removed from the activity summary.

System action

None.

User response

None.

ANR22 45I Activity summary pruning completed: *number of records* records removed.

Explanation

A DELETE FILESPACE command has been entered.

System action

The system asks whether you wish to continue with the command.

User response

To process the DELETE FILESPACE command, enter 'Y'; otherwise, enter 'N'.

ANR22 39W This command will revoke privileges for administrator *adminName*. This

Explanation

The command indicated contains a storage pool cloud identity that exceeds the maximum length allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool cloud identity.

ANR22 41E Command: Storage pool cloud password exceeds 255 characters.

Explanation

All expired (older than the summary archive retention value) server activity summary records have been removed; the number of records deleted is shown.

System action

None.

User response

None.

ANR22 46I Vary online process initiated for database

**volume volume
name (process
ID process ID).**

Explanation

In response to a VARY ONLINE command, the process with the process ID shown has been started to vary on the database volume indicated.

System action

None.

User response

None.

**ANR22 Database
47I volume volume
name varied
offline.**

Explanation

A VARY OFFLINE command has put the indicated database volume into an offline state.

System action

None.

User response

None.

**ANR22 Command: The
48E cloud storage
pool password
is missing.**

Explanation

A cloud storage pool password is necessary for this command.

System action

The IBM Storage Protect server does not process the command.

User response

Reissue the command with a valid cloud storage pool password.

**ANR22 Storage pool
49I storage pool
name is defined.**

Explanation

A DEFINE STGPOOL command has created the storage pool.

System action

None.

User response

None.

**ANR22 Command:
50E Operation is not
allowed
because node
nodename is
decommissione
d.**

Explanation

You might be able to restore or retrieve data from a decommissioned client node, but you cannot store new data or alter existing data.

System action

Client sessions that attempt to store new data or change existing data will be terminated with a protocol error.

User response

None.

**ANR22 The ACCESS
51S setting for
storage pool
poolname was
changed from
access to**

**UNAVAILABLE.
The pool is
enabled for
encryption, but
the master
encryption key
for the server is
not available.**

Explanation

The server either does not have a master encryption key or the master encryption key is not available. Encrypted storage pool data cannot be read from or written to the storage pool.

System action

The storage pool ACCESS setting was changed to UNAVAILABLE.

User response

Verify that the server key database, dsmkeydb.kdb, and its password stash file, dsmkeydb.sth, exist and can be read by the server. If necessary, recover the password file from a backup.

After the server password file becomes available to the server, restart the server and issue the UPDATE STGPOOL command to change the ACCESS setting to its original value.

**ANR22 The ACCESS
52S setting for
storage pool
poolname was
changed from
access to
UNAVAILABLE.
The pool is
enabled for
encryption, but
the master
encryption key**

**for the server
was reset.**

Explanation

The master encryption key used to protect data in encrypted storage pools changed, possibly because the server key database, dsmkeydb.kdb, was deleted. The server cannot read existing data that was encrypted because it no longer has access to the encryption key used to protect the data.

System action

The storage pool ACCESS setting was changed to UNAVAILABLE.

User response

Rename the server key database, dsmkeydb.kdb, and its password stash file, dsmkeydb.sth, and recover an earlier version of the password file from a backup. Restart the server. Issue the UPDATE STGPOOL command to change the storage pool ACCESS setting back to its original value.

**ANR22 Command: You
53E cannot specify
the
ENCRYPT=YES
parameter
because the
server master
encryption key
is unavailable.**

Explanation

Encryption cannot be enabled for a storage pool because the server master encryption key is not available.

System action

The command fails.

User response

Reissue the command and specify ENCRYPT=NO.

If encryption is required, review the activity log for errors related to either the server master encryption key or the server password file. Correct any problems that prevent the master encryption key being read from the server password file.

ANR22 Command: The 54E VOLUMENAMES parameter must be specified when SCRATCH=NO is specified.

Explanation

The SCRATCH parameter is specified as NO for the command *Command* but the VOLUMENAMES parameter is not specified. When scratch volumes are not allowed, the VOLUMENAMES parameter must be specified to indicate the volumes that can be used for the command.

System action

The command fails.

User response

Reissue the command and specify a valid VOLUMENAMES parameter.

ANR22 Command: The 55E VOLUMENAMES

parameter must be specified.

Explanation

The VOLUMENAMES parameter must be specified to indicate the volumes that can be used for the command.

System action

The command fails.

User response

Reissue the command and specify a valid VOLUMENAMES parameter.

ANR22 Command: The 56E RETENTION parameter must be specified.

Explanation

The RETENTION parameter must be specified to indicate the retention period to be used for the command.

System action

The command fails.

User response

Reissue the command and specify a valid RETENTION parameter.

ANR22 Command: 57E Administrator administrator name is not authorized to issue this command for node node name.

Explanation

The specified administrator has entered

the indicated command, but this administrator does not have the proper authority necessary to run the command for the indicated node. Note: This message can be issued as a result of the server option REQSYSAUTHOUTFILE YES being in effect.

System action

The server does not process the command for the indicated node. If multiple nodes were specified on the command, the server may continue processing the command for the other nodes.

User response

Examine previous messages for any additional information. Issue the command from a properly authorized administrator ID, or contact the system administrator to have additional authority granted to the current administrator ID.

ANR22 Command: 58E Invalid summary retention period - retention value. Specify a number from 0 to 9999.

Explanation

A SET SUMMARYRETENTION command has been entered that specifies an invalid retention period. Valid numbers are from 0 to 9999.

System action

The server does not process the command.

User response

Reissue the command with a valid retention period. Valid numbers are from 0 to 9999.

ANR22 Summary 59I retention period set to number of days days.

Explanation

The number of days that activity summary records are kept in the server database has been set to the value indicated with the SET SUMMARYRETENTION command.

System action

None.

User response

None.

ANR22 The version of 60W IBM Storage Protect is not compatible with this operating system.

Explanation

The command cannot be processed on this operating system.

System action

The operation fails.

User response

Use an operating system that is compatible with IBM Storage Protect to issue this command.

For information about operating systems that are supported by IBM Storage Protect, see technote 1243309 "Overview - IBM Storage Protect Supported Operating Systems" (<http://www-01.ibm.com/support/docview.wss?uid=swg21243309>).

ANR22 61W The server password file, password file name, was not found. A new master encryption key will be created and stored in a new password file.

Explanation

The master encryption key cannot be read from the password file because the file does not exist.

System action

A new master encryption key will be created and stored in the server password file.

User response

If storage pool encryption is not in use, no action is required.

If existing storage pools contain encrypted data, restore the server password file. Restore it to a version that contains the master encryption key that was used to protect the encrypted storage pool data. Restart the server.

ANR22 62E Unable to read from the server password file, password file

*name; reason:
error reason.*

Explanation

The server could not read the master encryption key from the server password file.

System action

None.

User response

Correct the problem identified in the error reason and restart the server.

ANR22 63E Unable to write to the server password file, password file name; reason: error reason.

Explanation

The server could not write the master encryption key to the server password file.

System action

None.

User response

Correct the problem identified in the error reason and restart the server.

ANR22 64E Corruption detected reading from the server password file, password file name. The master encryption key cannot be read.

Explanation

The server detected corruption in the server password file while attempting to read the master encryption key. The master encryption key could not be read.

System action

None.

User response

Recover the password file from a backup. Restart the server.

ANR22 65E The SERVERPASSWORD cannot be blank.

Explanation

Encryption does not work if the password is not set.

System action

None.

User response

Set the server password.

ANR22 66I Vary online process initiated for recovery log volume volume name (process ID process ID).

Explanation

In response to a VARY ONLINE command, the process with process ID shown has been started to vary on the recovery log volume indicated.

System action

None.

User response

None.

ANR22 67I Recovery log volume volume name varied offline.

Explanation

A VARY OFFLINE command has put the recovery log volume indicated into an offline state.

System action

None.

User response

None.

ANR22 68W ENCRYPTED value encryption value was not changed when the CLOUDLOCATION parameter was updated to cloudlocation value.

Explanation

The ENCRYPTION value does not automatically change when you change the CLOUDLOCATION value in the UPDATE STGPOOL command.

System action

None.

User response

If you want to turn encryption off, change the ENCRYPTION value to OFF.

ANR22 69E The PROTECTKEYS=NO parameter

cannot be specified on the SET DBRECOVERY command because one or more storage pools are enabled for encryption.

Explanation

The SET DBRECOVERY command failed because PROTECTKEYS=NO was specified and one or more storage pools are enabled for encryption.

System action

The server does not process the command.

User response

Issue the SET DBRECOVERY command without the PROTECTKEYS=NO parameter.

ANR22 The 70E PROTECTKEYS parameter is not enabled.

Explanation

The master encryption key must be set before you enable the PROTECTKEYS parameter.

System action

The server does not process the command.

User response

Issue the SET SERVERPASSWORD command to set and protect the master encryption key.

ANR22 This command 72W will result in the deletion of all inventory references to damaged data in stgpool stgpool.

Explanation

A REMOVE DAMAGE command has been entered.

System action

The system asks whether you wish to continue with the command.

User response

To process the REMOVE DAMAGE command, enter 'Y' to continue or 'N' to stop the process.

ANR22 A protection or 73E replication operation failed because a container is not available.

Explanation

The server cannot complete the operation because it cannot access data in a container.

System action

The operation fails and server operation continues.

User response

For details about the problem, see the first-failure data capture (FFDC) log for the server. By default, the log is named dsmffdc.log and is in the server instance directory. Validate the

data in the container that caused the problem by issuing the AUDIT CONTAINER command. If the command results show that the container is damaged, repair the storage pool by using the REPAIR STGPOOL command. Then, retry the operation that failed.

ANR22 Operation is not 74W allowed because the VM backed up to filespace filespace name is decommissioned.

Explanation

The filespace is a decommissioned VM and will not be processed by this command.

System action

Processing will continue with the next filesystem in the list.

User response

None.

ANR22 Data Base 75I Space trigger defined, but is disabled.

Explanation

A database space trigger has been defined, but because the space expansion percentage is currently set to 0, the space trigger is disabled.

System action

None.

User response

To activate the space trigger, use the UPDATE SPACETRIGGER command to set the space expansion percentage to a value greater than 0.

ANR22 The 76W administrative user ID administrator name matches a node name. The matching names can cause password management issues if you are authenticating users with a Lightweight Directory Access Protocol (LDAP) server in integrated mode.

Explanation

Integrated mode means that users authenticate with an LDAP server by using IDs that are defined on that server. If you are using integrated mode, and have a matching administrative user ID and node name, they resolve to a single LDAP user ID. In this situation, automatic password changes might update the same password twice. As a result, the password might become unknown to the administrative user ID. Alternatively, password update operations might fail.

System action

System operations continue.

User response

To avoid password management issues, complete the following steps: 1. Remove the specified administrative user ID by using the REMOVE ADMIN command. For example, if the administrator is ADMIN6, issue the following command: remove admin admin6 2. Register a different administrative user ID for client owner operations by using the REGISTER ADMIN command. For example, if the administrator is ADMIN6 and you want to authenticate with an LDAP server, issue the following command: register admin admin6 authentication=ldap 3. Grant client owner privileges to the new administrative user ID by using the GRANT AUTHORITY command. For example, if the administrator is ADMIN6 and the node name is NODE2, issue the following command: grant authority admin6 classes=node authority=owner node=node2

ANR22 77W The server master encryption key was not found. A new master encryption key will be created.

Explanation

The master encryption key cannot be read, or an issue is preventing its detection.

System action

A new master encryption key will be created and stored in the server key database.

User response

If storage pool encryption is not in use, or if the server never had a master encryption key, no action is required.

If existing storage pools contain encrypted data, complete the following steps:

1. Restore the server key database to a version that contains the master encryption key that was used to protect the encrypted storage pool data.
2. Restart the server.

ANR22 78I The server master encryption key was moved from the server password file, password file name, to the server key database.

Explanation

The master encryption key is stored in a new location. It is now stored in the server key database.

System action

The server password file is deleted, and server operations continue.

User response

None.

ANR22 79W A server password file,

password file name, was found during an upgrade operation. The file was renamed to new password file name.

Explanation

A server password file was found and renamed, and its contents were moved to the server key database, dsmkeydb.kdb. The server password file is no longer needed by the server. However, if you need to restore the server database to a point in time before this upgrade, the password file is required.

System action

The password file was renamed, and server operations continue.

User response

Optionally, to help ensure that the server database can be restored to a point in time before this upgrade, complete the following steps:

1. Save the renamed password file.
2. After the database is restored, rename the password file to dsmserv.pwd and place it in the server instance directory.

ANR22 80I Full database backup started as process process ID.

Explanation

A background process was started to backup the contents of the database. The full database backup process was assigned the process ID shown.

System action

The database backup process starts and server operation continues.

User response

The administrator may query the status of the database backup process by using the QUERY PROCESS command, or cancel the process with the CANCEL PROCESS command.

ANR22 81I Incremental database backup started as process process ID.

Explanation

A background process was started to backup the contents of the database. The incremental database backup process was assigned the process ID shown.

System action

The database backup process starts and server operation continues.

User response

The administrator may query the status of the database backup process by using the QUERY PROCESS command, or cancel the process with the CANCEL PROCESS command.

ANR22 82E *Command name has already been started for storage pool Stgpool.*

Explanation

An audit container process has already been started for the storage pool.

System action

User response

Wait for the current audit container process to complete.

ANR22 83E *Command: Storage pool bucket name exceeds 63 characters.*

Explanation

The command contains a storage pool bucket name that exceeds the maximum length allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool bucket name.

ANR22 84S *The server master encryption key has changed. Passwords protected with the previous master encryption key are not available.*

Explanation

The master encryption key used to protect administrator and node passwords changed, possibly because the server password file was deleted. The server cannot read existing passwords that were encrypted because it no longer has access to the encryption key used to protect the passwords.

System action

The server cannot authenticate administrators and nodes defined with the AUTHENTICATION=LOCAL parameter.

User response

Rename the server password file and recover an earlier version of the password file from a backup. Restart the server.

If the server password file cannot be recovered, start the server in the foreground and issue the UPDATE ADMIN or UPDATE NODE command from the server console to set the password for affected administrators and nodes, respectively.

ANR22 85S *The server master encryption key cannot be read. Storage pool data and passwords encrypted with this key will be unavailable until the key is restored from a backup.*

Explanation

The master encryption key cannot be read, possibly because the server password file was deleted. The server cannot read existing passwords that were encrypted because it no longer has access to the encryption key used to protect the passwords. The server cannot read storage pool data that was encrypted because it no longer has access to the encryption key used to protect the data.

System action

The server cannot authenticate administrators and nodes defined with the AUTHENTICATION=LOCAL parameter.

User response

Recover the password file from a backup. Restart the server.

ANR22 86E *Command: The server master encryption key exists.*

Explanation

A request was made to reset the server master encryption key, but a master encryption key already exists.

System action

None.

User response

None.

ANR22 87I *Snapshot database backup started*

as process process ID.

Explanation

A background process was started to backup the contents of the database. The snapshot database backup process was assigned the process id shown.

System action

The database backup process starts and server operation continues.

User response

The administrator may query the started process by using the QUERY PROCESS command, or may cancel the process using the CANCEL PROCESS command.

ANR22 88I *Subfile set to state.*

Explanation

The SET SUBFILE command has been used to specify whether this server will allow clients to back up subfiles. If a value of CLIENT is specified, clients are given the option of backing up subfiles. If a value of NO is specified, clients are not allowed to back up subfiles.

System action

None.

User response

None.

ANR22 89I *Administrative userid administrator name defined*

for authority over node *node name* has not been removed.

Explanation

The specified administrator was not removed.

System action

None.

User response

None.

ANR22 90W Resetting the master key will result in the generation of a new master encryption key; any data that was encrypted using the previous master encryption key will be lost.

Explanation

A request was made to reset the server master encryption key. The master encryption key is used to encrypt data in directory-container and cloud-container storage pools. In addition, it is used to encrypt sensitive information in the server database such as administrator and node passwords. Resetting the master encryption key will result in the loss of all data encrypted using the old master encryption key.

System action

None.

User response

None.

ANR22 91E Command: A error was encountered while resetting the server master encryption key. The error code is *Error code*.

Explanation

An error was encountered while processing a request to reset the server master encryption key.

System action

None.

User response

Inspect the activity log and the first-failure data capture log, dsmffdc.log, for errors related to the command. Correct the condition leading to the error and reissue the command.

ANR22 92W The PROTECTKEYS parameter in SET DBRECOVERY is set to NO.

Explanation

The master encryption key that is used to protect storage pool data, administrator passwords, and node passwords should be protected during database backups. The current value for the PROTECTKEYS parameter is NO, as set by the SET DBRECOVERY command.

System action

Server operations continue.

User response

Issue the SET DBRECOVERY command, specifying the PROTECTKEYS=YES and PASSWORD= parameters to enable encryption key protection for automatic database backups.

ANR22 93I Reissue the Command command and specify the confirmation code "Confirmation Code" using the Parameter parameter.

Explanation

A request was made perform a destructive operation. Before performing the operation, the server requires that you confirm that you understand the risks and that you still wish to perform the operation.

System action

None.

User response

Confirm that you wish to perform the specified action by reissuing the command with the provided confirmation code.

ANR22 94W Process process ID for MOVE CONTAINER for container name completed with

warning or more-severe messages issued (rc=return code).

Explanation

The MOVE CONTAINER process completed with a state other than success.

System action

None.

User response

Review the messages in the activity and event logs that were issued by this process. Determine if the conditions that caused these messages to be issued had an affect on the operation.

ANR22 95E Command: NAMETYPE cannot be specified when the specified filespace name contains a wildcard.

Explanation

System action

None.

User response

Reissue the command without specifying both a nametype and a wildcarded filespace name.

ANR22 96E Command: The pool type pool type for storage pool pool name is not compatible with the device class class name.

Explanation

The DEFINE STGPOOL command was issued with conflicting pool type and device class parameters.

System action

The server does not process the command.

User response

Reissue the DEFINE STGPOOL command with a pool type and a device class name that are compatible. For details about the compatibility of storage pool types and device classes, see the help for the DEFINE STGPOOL command.

ANR22 Command: 97I Optionset optionset name, option option name, sequence number old sequence number, has been changed to new sequence number.

Explanation

The requested option sequence number has been updated in response to an UPDATE CLIENTOPT command.

System action

None.

User response

None.

ANR22 Command: 98I Optionset optionset name, option option name, sequence

number old sequence number, is not updated.

Explanation

The requested option sequence number is not updated in response to an UPDATE CLIENTOPT command.

System action

None.

User response

Reissue the UPDATE CLIENTOPT command with a valid old sequence number.

ANR22 Password 99I expiration period for administrator administrator name set to number of days

Explanation

The number of days that the administrator's password can be used before it must be changed has been set to the value indicated with the SET PASSEXP command.

System action

None.

User response

None.

ANR23 Could not open 00E "file spec" the server help file.

Explanation

The named help file could not be accessed.

System action

The requested help text is not displayed.

User response

Contact the system administrator.

ANR23 No filespaces 01W found for specified node(s).

Explanation

None of the node(s) specified had a filesystem.

System action

None.

User response

Specify at least one node with a filesystem.

ANR23 The node and 02E file space pair, node node name and file space filesystem name, was not removed.

Explanation

The remove operation failed because the node and file space pair is not a member of the subrule.

System action

If you specified the removal of any node and file space pairs that are members of the subrule, those pairs were removed. System operation continues.

User response

No action is required.

ANR23 There is no help 03E section numbered section number.

Explanation

The numeric operand supplied on the HELP command is either less than 1 or greater than the highest-numbered entry in the help index.

System action

The server does not process the HELP command.

User response

Issue the HELP command with no operands and select from the numbered list (help index) displayed in response.

ANR23 Database 04E backup configuration is not complete. Neither the PROTECTKEYS parameter nor the PASSWORD parameter in SET DBRECOVERY has been set.

Explanation

The master encryption key that is used to protect storage pool data, administrator passwords, and node passwords should be protected during database backups. The PROTECTKEYS parameter, as set by the SET DBRECOVERY command, has not been set. The default is PROTECTKEYS=YES, but database backups cannot proceed unless

both PROTECTKEYS=YES and PASSWORD= are specified.

System action

Server operations continue.

User response

Issue the SET DBRECOVERY command, specifying the PROTECTKEYS=YES and PASSWORD= parameters to enable encryption key protection for database backups.

ANR23 05I The change to option *option name* will not take effect until the server is restarted.

Explanation

Due to the nature of the option being changed, the effect of the change may not be immediate.

System action

Server operation continues. Since the option was updated in the server options file, the change will take effect when the server restarts.

User response

None.

ANR23 06E No help text could be found for this command/subcommand: *command*.

Explanation

The operands you entered for the HELP command, although valid

command/subcommand names, do not match any named entry into the file of help text.

System action

The server does not process the HELP command.

User response

Contact the system administrator.

ANR23 07E No help text could be found for this message: *message ID*.

Explanation

The message ID you entered for the help command does not match any message entry in the file of help text.

System action

The help command is not processed.

User response

Contact the system administrator.

ANR23 08W Audit Volume marking damaged file as damaged on volume *volume name*: Node *node name*, Type *file type*, File space *filespace name*, fsId *filespace id*, File Name *file name* is number *version of total versions* versions.

Explanation

As the result of an AUDIT VOLUME command that specified FIX=YES for the volume shown, the file whose information is displayed is marked as damaged in the server. The file is marked as damaged because it can be recovered from a copy known to exist in a COPY storage pool. If this file belongs to an aggregate, the entire aggregate is marked damaged, and this message will be issued for every file in the aggregate. The version numbers for the file are numbered from most recent (1) to least recent (n, where n is the total number of versions).

System action

The file is marked as damaged in the server database.

User response

To recover the damaged file use the RESTORE STGPPOOL or RESTORE VOLUME command.

ANR23 09E A storage pool protection operation failed because a copy of the data cannot be written to another storage pool on the replication target server.

Explanation

The server cannot complete the operation because it cannot write data to the target container storage pool.

System action

The operation fails and server operation continues.

User response

For more information, see the first-failure data capture (FFDC) log for the server. By default, the log is named dsmffdc.log and is in the server instance directory. Issue the **AUDIT CONTAINER** command to scan for inconsistencies between database information and a container in the container storage pool. Then, reissue the **PROTECT STGPPOOL** command.

ANR23 10W This command will compare all inventory references to volume *volume name* with the actual data stored on the volume and will report any discrepancies; the data will be inaccessible to users until the operation completes.

Explanation

During the execution of an AUDIT VOLUME command, any data the volume named would be unavailable to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit the volume or 'N' to stop the process.

ANR23 11W This command will discard any inventory references to volume *volume name* associated with missing or inconsistent stored data, thereby rendering the data unrecoverable; the valid data on the volume will be inaccessible to users until the operation completes.

Explanation

During the execution of an AUDIT VOLUME command, any data the volume named would be unavailable to users. After the command has ended, any inconsistent data found will be discarded.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit the volume or 'N' to stop the process.

ANR23 12I Audit Volume (Repair) process started for volume *volume name* (process ID *process ID*).

Explanation

As the result of an AUDIT VOLUME command that specified FIX=YES for the volume shown, the process whose ID is displayed has begun auditing the volume.

System action

The volume is audited and inconsistent data is discarded.

User response

None.

ANR23 13I Audit Volume (Inspect Only) process started for volume *volume name* (process ID *process ID*).

Explanation

As the result of an AUDIT VOLUME command that specified FIX=NO for the volume shown, the process whose ID is displayed has begun auditing the volume.

System action

The volume is audited and inconsistent data is displayed.

User response

None.

ANR23 14E Command: Invalid destination storage pool on target server *server name* for object client data from node *node name* and filespace *filespace name*.

Explanation

The REPLICATE NODE command failed because the storage pool on the target server is neither a directory-container storage pool nor a cloud-container storage pool.

System action

Object client data on the local server is not replicated.

User response

Modify the policy on the target server to update the destination storage pool. Ensure that object client data is sent to either a directory-container storage pool or a cloud-container storage pool. Then, reissue the REPLICATE NODE command for the object client node that is specified in this message.

ANR23 15W Command: Node *node name* is not allowed to be included in a retention set.

Explanation

The node is reserved, and cannot be added to a retention rule or to a retention set.

System action

Data belonging to the node will not be retained.

User response

Issue QUERY OPTIONS to see a list of nodes that are excluded via the RETSETEXCLUDENODE option. Either remove the node from list

of restricted nodes or remove it from any retention rules. Note that nodes used for client deployment are permanently restricted, and can never be added to a retention rule or retention set.

ANR23 16W Audit Volume deleting damaged file on volume *volume name*: Node *node name*, Type *file type*, File space *filespace name*, fsId *filespace id*, File Name *file name* is number *version of total versions* versions.

Explanation

As the result of an AUDIT VOLUME command that specified FIX=YES for the volume shown, the file whose information is displayed is deleted from the server. The version numbers for the file are numbered from most recent (1) to least recent (n, where n is the total number of versions).

System action

The file is deleted.

User response

None.

ANR23 17W Audit Volume found damaged file on volume *volume name*: Node *node name*, Type *file type*, File space *filespace name*, fsId *filespace id*,

File name *file name* is number *version* of total versions versions.

Explanation

As the result of an AUDIT VOLUME command that specified FIX=NO for the volume shown, the file whose information is displayed is found to be in error and not accessible. If this file belongs to an aggregate, the entire aggregate is marked damaged, and this message will be issued for every file in the aggregate. The version numbers for the file are numbered from most recent (1) to least recent (n, where n is the total number of versions).

System action

None.

User response

None.

ANR23 18W Audit volume process terminated for volume *volume name* - process canceled.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, the process performing the audit was canceled.

System action

The AUDIT VOLUME command is ended.

User response

None.

ANR23 19W Audit volume process terminated for volume *volume name* - error reading device.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, an unrecoverable read error occurred on the volume.

System action

The AUDIT VOLUME command is ended.

User response

Attempt to correct the cause of the read error, and reissue the command.

ANR23 20W Audit volume process terminated for volume *volume name* - data transfer interrupted.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, a data transfer operation has been interrupted and cannot be continued.

System action

The AUDIT VOLUME command is ended.

User response

If possible, determine and correct the cause

of the interruption, and reissue the command.

ANR23 21W Audit volume process terminated for volume *volume name* - storage media inaccessible.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, a required volume cannot be mounted.

System action

The AUDIT VOLUME command is ended.

User response

None.

ANR23 22W Audit volume process terminated for volume *volume name* - sufficient recovery log space is not available.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, the server does not have sufficient recovery log space to continue.

System action

The AUDIT VOLUME command is ended.

User response

If necessary, make more recovery log space available to the server.

ANR23 23W Audit volume process terminated for volume *volume name* - sufficient database space is not available.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, the server does not have sufficient database space to continue.

System action

The AUDIT VOLUME command is ended.

User response

If necessary, make more database space available to the server.

ANR23 24W Audit volume process terminated for volume *volume name* - thread resource not available.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, the server cannot start a thread for the audit process.

System action

The AUDIT VOLUME command is ended.

User response

Reissue the AUDIT VOLUME command. If the error persists, it may

indicate a shortage of server memory.

ANR23 25W Audit volume process terminated for volume *volume name* - sufficient memory is not available.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, the server does not have enough memory available to complete the command.

System action

The AUDIT VOLUME command is ended.

User response

If necessary make more memory available to the server.

ANR23 26W An audit process was halted for volume *volume name* because of a lock conflict.

Explanation

Processing of the AUDIT VOLUME command failed for the specified volume because a lock conflict was detected. The cause of the lock conflict can vary. A possible cause is that a RECLAIM STGPPOOL command, MOVE DRMEDIA command, or another data-accessing process is running on the same volume.

System action

System operation continues.

User response

To resolve the issue, complete the following steps:

1. To determine whether a RECLAIM STGPPOOL, MOVE DRMEDIA, or other data-accessing process is running, issue the following command:

query process
2. If a RECLAIM STGPPOOL, MOVE DRMEDIA, or another data-accessing process is running, wait for processing to finish.
3. Reissue the AUDIT VOLUME command.

ANR23 27W Audit volume process terminated for volume *volume name* - internal server error detected.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, an internal server error occurs.

System action

The AUDIT VOLUME command is ended.

User response

Contact your service representative.

ANR23 32W Object *object.ID* deleted by another process

during execution of an AUDIT VOLUME command for volume *volume name*.

Explanation

During processing of an AUDIT VOLUME command, a data storage object was deleted from the volume that was being audited. The AUDIT VOLUME process was unable to locate this object on the specified volume. Normally, this action is not considered an error condition, because the object was probably deleted by a process such as a DELETE FILESPACE command.

System action

Processing of the AUDIT VOLUME command continues.

User response

Check the activity log to verify that some process (such as a DELETE FILESPACE command) was in progress during the AUDIT VOLUME command that would account for the deleted object. If no such process can be identified, contact your service representative.

ANR23 33W Missing or incorrect information detected by AUDIT VOLUME for volume *volume name*.

Explanation

An AUDIT VOLUME command detects missing or incorrect information for the specified volume.

System action

Audit processing continues.

User response

Reissue the audit command with FIX=YES so that the information can be created or corrected.

ANR23 34W Missing or incorrect information detected by AUDIT VOLUME for volume *volume name* - information will be created or corrected.

Explanation

An AUDIT VOLUME process detects missing or incorrect information for the specified volume. Because FIX=YES has been specified for the audit command, the information is created or corrected.

System action

Audit processing continues.

User response

None.

ANR23 35W Audit Volume has encountered an I/O error for volume *volume name* while

attempting to read: Node *node name*, Type *file type*, Filespace *filesystem name*, fsId *filesystem id*, File Name *file name*.

Explanation

The AUDIT VOLUME process encountered an I/O error for the specified volume while attempting to read the specified file. If this file belongs to an aggregate, the entire aggregate is marked damaged, and this message will be issued for every file in the aggregate.

System action

None.

User response

Identify and resolve the I/O error for the volume if possible. Verify that the volume's device is functioning properly and that the volume is usable. For example, if the volume is a tape volume, make sure the drive is clean or that the tape volume is usable by testing it by using a different drive.

ANR23 Audit Volume 36W terminated for volume *volume name* - insufficient number of mount points available for removable media.

Explanation

During Audit Volume for the indicated volume, the server could not allocate sufficient mount points for the volume required.

System action

Audit Volume stops.

User response

If necessary, make more mount points available.

ANR23 Header size is 37W reset for object *Object ID*, verb type (*Verb Type*), from (*Header Size*) to (*Verb Length*).

Explanation

The header size for the specified object was recalculated while auditing a volume.

System action

If FIX=YES was specified, the header size for the object will be updated. Processing continues.

User response

None.

ANR23 Diagnostic(ID): 38E Invalid header received for object *ObjectID*, length *Data Length*. Size (*Header Size*), pushed (*Pushed Length*), skipped (*Skipped Length*), status (*New Retrieve*). Found length (*Verb Length*), type (*Verb Type*), size (*Verb Size*).

Explanation

An invalid header was detected for the specified object while auditing a volume. Diagnostic information is included in the message.

System action

If FIX=YES was specified, this object will be marked damaged. Processing continues.

User response

Restore the volume or storage pool that includes this object.

ANR23 Command: 39E Object sets still exist for node *node name*.

Explanation

A REMOVE NODE command has been entered for a node for which the server is still storing backup sets. To remove a node, the node must not have any files or backup sets stored on the server.

System action

The server does not process the command.

User response

To remove the node, delete all backup sets from the server and reissue the command.

ANR23 Command: 40E Invalid storage pool name - *storage pool name*.

Explanation

The command indicated contains an invalid storage pool name.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool name.

ANR23 Command: 41E Missing next storage pool name.

Explanation

The command indicated requires a storage pool name, but none has been entered.

System action

The server does not process the command.

User response

Reissue the command with a storage pool name.

ANR23 Command: 42E Storage pool description exceeds maximum characters.

Explanation

The command indicated contains a storage pool description that exceeds the maximum length allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool description.

ANR23 Command:
43E Invalid device class name - device class name.

Explanation

The command indicated contains an invalid device class name.

System action

The server does not process the command.

User response

Reissue the command with a valid device class name.

ANR23 Command: The
44E "option" option is not valid for device class device class name.

Explanation

The command indicated specifies an option shown that is not valid for a storage pool that belongs to the device class shown.

System action

The server does not process the command.

User response

Reissue the command with options appropriate to the device class.

ANR23 Command:
45E Invalid volume

name - volume name.

Explanation

The command indicated contains an invalid volume name.

System action

The server does not process the command.

User response

Reissue the command with a valid volume name.

ANR23 Command:
46E Volume name "volume name" is not valid for device class device class name.

Explanation

The command indicated specifies the name of a volume that cannot be used with the device class shown.

System action

The server does not process the command.

User response

Reissue the command with a valid volume name.

ANR23 Command:
47E Volume name "volume name" is ambiguous; resolves to multiple defined volume names.

Explanation

The command shown was entered with a volume name pattern that matches more than one

volume. The command can only process a single volume.

System action

The command is not executed.

User response

Reissue the command with a more specific volume name.

ANR23 Command: The
48E "option" option is not valid for a volume assigned to a primary storage pool.

Explanation

The command indicated specifies an option that is not valid for a volume in a primary storage pool.

System action

The server does not process the command.

User response

Reissue the command with valid options for a volume in a primary storage pool.

ANR23 No backups for
49E server server name were found at the location that was specified.

Explanation

The cloud storage location does not contain backups for the specified server.

System action

The server does not process the command.

User response

Verify that the server has backups at the cloud storage location. To list the backups from multiple servers that are saved at the same cloud storage location, remove the SERVERNAME parameter from the DSMSEV RESTORE DB command. Then, reissue the DSMSEV RESTORE DB command.

ANR23 Command:
50E Device class device class name is already defined.

Explanation

The command indicated has attempted to define a device class that already exists.

System action

The server does not process the command.

User response

None.

ANR23 Command:
51E Device class device class name is not defined.

Explanation

The command indicated references a device class that does not exist.

System action

The server does not process the command.

User response

None.

ANR23 Command:
52E Device class
device class
name may not
be deleted.

Explanation

A DELETE DEVCLASS command specifies the class name DISK, which is a system-defined device class and may not be deleted.

System action

The server does not process the command.

User response

None.

ANR23 Command:
53E Device class
device class
name may not
be updated.

Explanation

An UPDATE DEVCLASS command specifies the class name DISK, which is a system-defined device class and may not be changed.

System action

The server does not process the command.

User response

None.

ANR23 Command:
54E Device class
device class
name is still
referenced by
one or more
storage pools, or

database
backup, or
export volumes
or backupset
volumes.

Explanation

The DELETE DEVCLASS command has attempted to delete a device class that has storage pools assigned to it, or is referenced by database backup, export volumes or backupset volumes.

System action

The server does not process the command.

User response

Issue Q DEVCLASS to view the storage pool reference count, Q STGPOOL to determine which pool references the device class, and Q VOLHIST to locate database backup or export volume or backupset volume references.

ANR23 Command:
55E Required
parameter is
missing -
missing
parameter.

Explanation

The specified server command has been entered without the required parameter. The required parameter is shown.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR23 Command:
56E Incompatible
parameters
specified - first
parameter,
second
parameter.

Explanation

The specified server command has been entered with mutually exclusive parameters. The two parameters are listed.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR23 Command: The
57E DISK device
class is not
supported for
copy storage
pools.

Explanation

An attempt is made to define a copy storage pool using a device of DISK. These storage pools can only be assigned to a sequential device class.

System action

The server does not process the command.

User response

Reissue the command specifying a sequential device class.

ANR23 Command:
58E Required value
for missing
parameter is
missing.

Explanation

The specified server command has been entered without the required value. The required value is shown.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR23 Command:
59E Volume name
"volume name"
must be
specified with a
DISK or FILE
STGPOOL.

Explanation

The command indicated specifies the name of a volume that must be specified with a storage pool associated with a device class of type DISK or FILE.

System action

The server does not process the command.

User response

Reissue the command with a valid volume name and storage pool.

ANR23 Command:
60E Device class
device class
name may not
be used for
database
backup.

Explanation

The command specifies the DISK device class, which cannot be used for database backup, backup trigger, or restore operations.

System action

The server does not process the command.

User response

Reissue the command with a valid device class.

ANR23 Command: A full
61E database
backup is
required.

Explanation

A BACKUP DB command specified an incremental backup, but a full backup is required.

System action

The server does not process the command.

User response

Reissue the command specifying a full backup.

ANR23 The Command
62E command failed
because the
PROTECTKEYS=
NO setting is not
valid for cloud
device classes.

Explanation

For cloud device classes, you must specify the PROTECTKEYS=YES parameter setting.

System action

Server operations continue, but the server does not process the specified command.

User response

Reissue the displayed command with the PROTECTKEYS=YES parameter setting.

ANR23 Command:
63E Operation is not
allowed
because file
space *file*space
***name* belonging**
to node *node*
***name* is**
decommissione
d.

Explanation

You might be able to restore or retrieve data from a decommissioned client file space, but you cannot store new data or alter existing data.

System action

Client sessions that attempt to store new data or change existing data will be terminated with a protocol error.

User response

None.

ANR23 Command:
64E Missing reclaim-
storage pool
name.

Explanation

The command indicated requires a storage pool name, but none has been entered.

System action

The server does not process the command.

User response

Reissue the command with a storage pool name.

ANR23 Backupset
65I *backup set name*
for node *node*
***name* (data type**
***data type*) has**
been deleted.

Explanation

The backup set has been deleted.

System action

The server has deleted the backupset.

User response

None.

ANR23 Backupset
66I *backup set name*
for node *node*
***name* (data type**
***data type*)**
would have
been deleted.

Explanation

The backup set would have been deleted as the result of a DELETE BACKUPSET command, but the PREVIEW=YES parameter was specified.

System action

None.

User response

If the backup set is to be deleted, reissue the command without specifying PREVIEW=YES.

ANR23 Retention
67I period for
backupset
backup set name
for node *node*
***name* (data type**
***data type*) has**
been updated.

Explanation

The backup set's retention period has been updated.

System action

The server has updated the backupset's retention period.

User response

None.

ANR23 Retention
68I period for
backupset
backup set name
for node *node*
***name* (data type**
***data type*)**
would have
been updated.

Explanation

The backup set's retention period would have been updated as the result of an UPDATE BACKUPSET command, but the PREVIEW=YES parameter was specified.

System action

None.

User response

If the backup set is to be updated, reissue the command without specifying PREVIEW=YES.

ANR23 Database backup volume and recovery plan file expiration starting under process process ID.

Explanation

The server has started expiration processing to remove expired database backup volumes and recovery plan files created on a remote server. This message is issued only if DRM is licensed on the server. The DB backup volumes expired is based on the value specified on the SET DRMDBBACKUPEXPIREDAYS. The recovery plan files expired is based on the value specified on the SET DRMRPFEXPIREDAYS. Server inventory expiration processing deletes the DB backup volumes and recovery plan files only if the volumes or plan files are created on the server to server virtual volumes.

System action

Server operation continues. The expiration process is cancellable.

User response

None.

ANR23 Export/import command: The

command was not processed because the parameters are invalid for an incremental data transfer operation.

Explanation

You cannot use the MERGEFILESPPACES parameter to incrementally transfer data from backup groups. This limitation applies to the EXPORT NODE, EXPORT SERVER, IMPORT NODE, and IMPORT SERVER commands. If you specify the MERGEFILESPPACES=YES parameter setting on any of these commands, do not specify the FILEDATA=ALLACTIVE parameter setting or the FROMDATE or TODATE parameters.

System action

System operation continues, but the command fails.

User response

Reissue the command with valid parameters.

ANR23 Command: 71I Container deletion is already running.

Explanation

Container deletion is already in progress, so there is nothing to do.

System action

System operation continues.

User response

None.

ANR23 Command: 72I Beginning container deletion process.

Explanation

Container deletion processing is beginning due to manual invocation.

System action

Container deletion processing will be started.

User response

None.

ANR23 Command: 73I Invoking chunk deletion.

Explanation

Chunk deletion processing is beginning due to manual invocation.

System action

Chunk deletion processing will be started unless it is already in progress.

User response

None.

ANR23 Command: 74W Skipping chunk deletion invocation because deletion processes are ongoing.

Explanation

Chunk deletion processing will not be invoked while deletion processes are ongoing.

System action

The server does not process the command.

User response

None.

ANR23 The server cannot authenticate to the cloud storage provider because the key location file specified in the device configuration file is inaccessible or missing. To resolve the issue, find the key file and move it to the location specified in the device configuration file.

Explanation

The restore operation requires that the key location file is in the location that is specified by the device configuration file.

System action

Server operation continues, but the server cannot authenticate to the cloud storage provider.

User response

To resolve the issue, find the key location file, which contains the Google Cloud Storage service account key in JavaScript Object Notation (JSON) format, and move it to the location specified in the device configuration file.

ANR23 Recovery Log 76I Space trigger defined, but is disabled.

Explanation

A recovery log space trigger has been defined, but because the space expansion percentage is currently set to 0, the space trigger is disabled.

System action

None.

User response

To activate the space trigger, use the UPDATE SPACETRIGGER command to set the space expansion percentage to a value greater than 0.

ANR23 Command: The 77E file space *filespace name (filespace id)* for node *node name* cannot be replicated because it has data in a retention set on both the source and target servers.

Explanation

The REPLICATE NODE process cannot replicate

any file spaces with data in retention sets that are defined on both the source and target servers.

System action

The REPLICATE NODE process ends. The specified file space and its data are not replicated to the target server.

User response

To resolve this issue, take either one of the following actions:

Delete the affected retention sets on either the source or target server. Optionally, delete the specified file space or its node from any retention rules that trigger the creation of subsequent retention sets. Reissue the REPLICATE NODE command or wait for the next scheduled replicate node operation.

Update the REPLICATE NODE command parameters to exclude this file space or its node from this and future-scheduled replication operations. Reissue the REPLICATE NODE command or wait for the next scheduled node replication operation.

ANR23 Command: 78I Beginning defrag processing.

Explanation

Container defrag processing is beginning due to manual invocation.

System action

Container defrag processing will be started.

User response

None.

ANR23 Command: 79W Skipping container defrag invocation because container defrag processing is already ongoing.

Explanation

Container defrag processing will not be invoked.

System action

The server does not process the command.

User response

None.

ANR23 Command: 80E Storage pool *storage pool name* is not defined.

Explanation

A nonexistent storage pool is specified for the issued command.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool name. If you are using the MACRO command to define and update the storage pool,

you must ensure that the DEFINE STGPOOL command is committed before the UPDATE STGPOOL command is issued.

ANR23 Command: 81E Storage pool *storage pool name* is already defined.

Explanation

A DEFINE STGPOOL command specifies the name of a storage pool that already exists.

System action

The server does not process the command.

User response

None.

ANR23 Command: 82E Storage pool *storage pool name* still contains at least one volume.

Explanation

A DELETE STGPOOL command specifies a storage pool that has volumes assigned to it.

System action

The server does not process the command.

User response

Delete the volume belonging to the storage pool and reissue the command.

ANR23 Command: 83E Storage pool *storage pool name* is

currently in use by clients and/or data management operations.

Explanation

The command indicated references a storage pool that is in use.

System action

The server does not process the command.

User response

Reissue the command at a later time.

ANR23 Command: Next 84E or Reclaim storage pool storage pool name introduces a cycle into the storage pool chain.

Explanation

A DEFINE STGPOOL or UPDATE STGPOOL command specifies a next storage pool that eventually points to the pool being processed.

System action

The server does not process the command.

User response

Reissue the command with a different next pool value.

ANR23 Command: 85E Storage pool storage pool name is in use as the next or reclaim pool for one or more

other storage pools.

Explanation

A DELETE STGPOOL command specifies a pool that is the next pool or the reclaim pool for other storage pools.

System action

The server does not process the command.

User response

If necessary, update other storage pools so that they do not reference the pool to be deleted, and reissue the command.

ANR23 Command: High 86E migration threshold must be set greater than or equal to the low migration threshold.

Explanation

A DEFINE or UPDATE STGPOOL command has attempted to set the storage pool low migration threshold (LOWMIG) parameter greater than the high migration threshold (HIGHMIG).

System action

The server does not process the command.

User response

Reissue the command with a low migration threshold less than or equal to the high migration threshold.

ANR23 Command: 87E Storage pool storage pool name is not a primary pool.

Explanation

The command indicated specifies the name of a storage pool which is not a primary pool. The command syntax requires that a primary storage pool name be specified.

System action

The server does not process the command.

User response

Reissue the command with a valid primary storage pool name.

ANR23 Command: 88E Storage pool storage pool name is not a copy or an active-data pool type pool.

Explanation

The command indicated specifies the name of a storage pool which is not a copy pool or an active-data pool. The command syntax requires that a copy storage pool name or an active-data pool name be specified.

System action

The server does not process the command.

User response

Reissue the command with a valid copy storage pool name or active-data pool name.

ANR23 Command: The 89E "option" parameter is not valid for a primary storage pool.

Explanation

The command indicated specifies a parameter that is not valid for a primary storage pool.

System action

The server does not process the command.

User response

Reissue the command with parameters appropriate for a primary storage pool.

ANR23 Command: The 90E "option" parameter is not valid for a pool type storage pool.

Explanation

The command indicated specifies a parameter that is not valid for either a copy, active-data, or copy container type storage pool.

System action

The server does not process the command.

User response

Reissue the command with parameters appropriate for the specified storage pool type.

ANR23 Command: 91E Server could not write device configuration

**information to
file name.**

Explanation

The BACKUP DEVCONFIG command does not successfully complete because the server cannot write to the file name specified.

System action

The server does not process the command.

User response

Make sure that the server has proper authority to write to the file indicated and that sufficient space is available in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set.

**ANR23 Command: An
92E internal error
was
encountered in
writing device
configuration
information to
file name.**

Explanation

The BACKUP DEVCONFIG command does not successfully complete because the server cannot write to the file name specified.

System action

The server does not process the command.

User response

Examine error messages on the server console

that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that sufficient space is available in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set.

**ANR23 Command:
93I Server device
configuration
information was
written to file
name.**

Explanation

This message is displayed in response to the BACKUP DEVCONFIG command and indicates that device configuration information was successfully written to the file name indicated.

System action

The server records device configuration information to the file name specified

User response

None.

**ANR23 Command:
94I Server device
configuration
information was
written to all
device
configuration
files.**

Explanation

This message is displayed in response to the BACKUP DEVCONFIG command

and indicates that device configuration information was successfully written to all files that were specified in the server options file.

System action

The server records device configuration information to the device configuration files.

User response

None.

**ANR23 Command:
95I Device
configuration
files have NOT
been defined for
automatic
recording -
specify a file
name for device
configuration
information.**

Explanation

This message is displayed in response to the BACKUP DEVCONFIG command and indicates that device configuration information cannot be written because no files were specified in the options file.

System action

The device configuration information is not written. Server operation continues.

User response

Reissue the BACKUP DEVCONFIG command and specify the name of a file to which you would like to have device configuration information recorded.

If desired, you may configure files that should be automatically updated with the DEVCONFIG option and restart the server.

**ANR23 Command: An
96E I/O error was
encountered in
writing device
configuration
information to
one or more of
the defined
device
configuration
files.**

Explanation

The BACKUP DEVCONFIG command does not complete successfully because the server cannot write to one or more of the defined device configuration files.

System action

The server does not process the command.

User response

Examine error messages on the server console that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that sufficient space is available in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set.

**ANR23 Command: An
97E internal server
error was
encountered in**

writing device configuration information to one or more of the defined device configuration files.

Explanation

The BACKUP DEVCONFIG command does not complete successfully because the server cannot write to one or more of the defined device configuration files.

System action

The server does not process the command.

User response

Examine error messages on the server console that may have been displayed prior to this message and correct any problems, if possible. Contact your service representative if you are unable to resolve the problem.

ANR23 Command: The 98E device configuration file contains a statement with invalid syntax.

Explanation

While processing the device configuration information, an invalid statement has been encountered.

System action

The server ends the operation being performed.

User response

Examine error messages on the server console that may have been displayed prior to this message and correct any problems if you have constructed the device configuration file manually. Make sure the statements are in the proper order. If you let the server construct the device configuration file automatically, restart the server, refresh the device configuration file by issuing the BACKUP DEVCONFIG command, and reissue the operation. If the problem persists, contact your service representative.

ANR23 Command: 99E Storage pool storage pool name is not a sequential pool.

Explanation

The command indicated specifies the name of a storage pool which is not a sequential pool. All storage pools are either fixed disk or sequential archival. All tape devices, as well as optical and file device classes, are sequential.

System action

The server does not process the command.

User response

Reissue the command with a valid sequential storage pool name.

ANR24 Command: 00E Volume volume name is already defined in a storage pool or

has been used previously to store export, database dump, or database backup information.

Explanation

The command indicated specifies the name of a storage pool volume that already exists or has been used to store server export, database dump, or database backup information as recorded in the server volume history file.

System action

The server does not process the command.

User response

Specify a volume that is not in use, is not defined in a storage pool, and which has not been previously used for an export, a database dump, or database backup operation as recorded in the server volume history information. Use the QUERY VOLUME command to display the names of volumes that are defined to server storage pools. Use the QUERY VOLHISTORY command to display the names of volumes that have been used for export, a database dump, or database backup operations.

ANR24 Command: 01E Volume volume name is not defined in a storage pool.

Explanation

The command indicated specifies the name of a storage pool volume that does not exist.

System action

The server does not process the command.

User response

None.

ANR24 Command: 02E Volume volume name is already online.

Explanation

A VARY ONLINE command specifies the name of a volume that is already online.

System action

The server does not process the command.

User response

None.

ANR24 Command: 03E Volume volume name is not online.

Explanation

The command indicated specifies the name of a volume that is not online.

System action

The server does not process the command.

User response

None.

ANR24 Command: 04E Volume volume

name is not available.

Explanation

The command indicated has attempted to access a volume that cannot be found.

System action

The server does not process the command.

User response

Check the spelling of the volume name to ensure it is correct. If the volume does not exist, preallocate it with the appropriate mechanism for the operating system on which the server is running.

ANR24 Command: 05E Volume volume name is currently in use by clients and/or data management operations.

Explanation

The command indicated specifies the name of a data storage volume that is currently in use.

System action

The server does not process the command.

User response

Verify that the volume is unavailable by issuing the **QUERY VOLUME <volume_name> F=D** command. This command will show the volume status. If the volume is in use and unavailable,

wait until the conflicting volume activity has completed, and then retry this operation.

Alternatively, verify that the volume is mounted by issuing **QUERY MOUNT <volume_name>**. If the volume is currently mounted, but idle, dismount it using the **DISMOUNT VOLUME <volume_name>** command, and then retry the operation.

ANR24 Command: 06E Volume volume name still contains data.

Explanation

The indicated command tries to delete a data storage volume that contains data.

System action

The server does not process the command.

User response

None.

ANR24 Error 07W encountered for storage pool directory: STGPOOLDIRECTORY in storage pool: STGPOOL Error: Error.

Explanation

The server encountered an error accessing the specified directory.

System action

If appropriate, the operation is attempted in another directory.

User response

Evaluate the warning and take appropriate corrective action.

ANR24 For storage pool 08W STGPOOL NAME (POOLID), the time limit for maintaining a setting of REUSEDELAY=0 was exceeded. To optimize server operations, the REUSEDELAY parameter was automatically reverted to its previous value of RESETVAL.

Explanation

The REUSEDELAY parameter specifies the number of days that must elapse before all deduplicated extents are removed from a storage pool. If the value is set to 0 for an extended period, extents are removed quickly, and this situation can affect server operations. For this reason, the value was reset to its previous nonzero value.

System action

Server operation continues.

User response

No action is required.

ANR24 An error 09E occurred while writing the master encryption key to cloud storage. To help ensure that you

can access the database backup in case of a disaster, manually store the master encryption key files in a secure location.

Explanation

The master encryption key might be written to cloud storage during the next database backup operation. However, to help ensure access to database data, keep a local copy of the master encryption key files.

System action

Server operations continue.

User response

For disaster recovery purposes, store the master encryption key files in a secure location. To investigate the error that occurred, review the first-failure data capture (FFDC) log.

ANR24 Command: 10E Unable to access volume volume name - access mode is set to "unavailable".

Explanation

The command shown specifies the volume whose name is displayed, but the volume cannot be accessed because its status is unavailable.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 Command:
11E Unable to access associated volume *volume name* - access mode is set to "unavailable".

Explanation

The command shown would require access to the volume whose name is displayed (because data from the volume specified in the command spans into this volume); the volume shown cannot be accessed because its status is unavailable.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 Command:
12E Audit operation already in progress for volume *volume name*.

Explanation

The command specified a volume that is currently in use by an audit volume operation.

System action

If the command is a MOVE NODEDATA command the server will skip the volume and continues moving node data on other volumes. Other commands are not processed.

User response

Reissue the command after the audit volume operation ends.

ANR24 Administrator
13E SERVER_CONSOLE should have been locked, but was not.

Explanation

The SERVER_CONSOLE administrator reached the limit for consecutive invalid passwords and should have been locked. Sessions cannot be started using the SERVER_CONSOLE administrator so it will not be locked. However, the fact that the limit on consecutive invalid passwords has been reached might indicate that an attacker is trying to log in as SERVER_CONSOLE.

System action

The administrator session will be refused.

User response

Sign-on again using a different administrator.

ANR24 Command:
14E Deletion operation already in progress for

volume *volume name*.

Explanation

The command specified a volume that is currently in use by a delete volume operation.

System action

If the command is a MOVE NODEDATA command the server will skip the volume and continues moving node data on other volumes. Other commands are not processed.

User response

Reissue the command after the delete volume operation ends.

ANR24 Administrator
15E Administrator Name should have been locked, but was not.

Explanation

The administrator reached the limit for consecutive invalid passwords and should have been locked. This administrator is necessary for the Operations Center (OC), Open Snap Store Manager (OSSM), or the IBM Eagle Agent to function so it will not be locked. However, the fact that the limit on consecutive invalid passwords has been reached might indicate that an attacker is trying to log in as this administrator. For the OC administrator, it might also just indicate that the administrator's password

changed on the hub and hasn't been updated on the spoke yet.

System action

The administrator session will be refused.

User response

Sign-on again using a different administrator.

ANR24 Command: Move
16E Data operation already in progress for volume *volume name*.

Explanation

The command specified a volume that is currently in use by a move data operation.

System action

If the command is a MOVE NODEDATA command the server will skip the volume and continues moving node data on other volumes. Other commands are not processed.

User response

Reissue the command after the move data process ends.

ANR24 SET
17W DBRECOVERY: The database backup password or the PROTECTKEYS setting has changed.

Explanation

New values were specified for the PROTECTKEYS or

PASSWORD parameters on the SET DBRECOVERY command.

System action

The command completes successfully.

User response

Make sure the changes were expected and are appropriate. If the parameters should not have been changed, or should have been changed to a different value, issue the SET DBRECOVERY command to change them to the appropriate value.

ANR24 Command: 18E Migration operation already in progress for volume volume name.

Explanation

The command specified a volume that is currently in use by a migration operation.

System action

If the command is a MOVE NODEDATA command the server will skip the volume and continues moving node data on other volumes. Other commands are not processed.

User response

Reissue the command after the migration ends.

ANR24 Command: 19W Password expiration cannot be set

for node or admin name.

Explanation

The PASSEXP setting cannot be set for OSSM nodes or the IBM-OSSM administrator with a value less than 15 days.

System action

Server operation continues, but the command is not processed.

User response

None.
ANR24 Command: 20E Space reclamation operation already in progress for volume volume name.

Explanation

The command specified a volume is currently in use by a reclamation operation.

System action

If the command is a MOVE NODEDATA command the server will skip the volume and continues moving node data on other volumes. Other commands are not processed.

User response

Reissue the command after the reclamation ends.

ANR24 The SET 21I DISSIMILARPOLICIES command is

used to specify whether the policies that are specified on the target replication server are used to manage replicated client-node data. For target replication server server name, this option is set to state.

Explanation

When the SET DISSIMILARPOLICIES state is ON, replicated client-node data is managed by the policies that are defined on the target replication server. When the SET DISSIMILARPOLICIES state is OFF, replicated client-node data is managed by the policies that are defined on the source replication server.

System action

Server operation continues.

User response

No action is required.

ANR24 Command: 22E Volume volume name is not a defined disk volume.

Explanation

The command shown specifies a volume name that does not match any known disk volume.

System action

The server does not process the command.

User response

Reissue the command with the correct volume name.

ANR24 Command: 23E Volume volume name is still online.

Explanation

An UPDATE VOLUME command specifies access=unavailable for a disk volume that is still online.

System action

The server does not process the command.

User response

Issue the VARY OFFLINE command, and reissue the UPDATE VOLUME command.

ANR24 Command: 24E Unable to access volume volume name - access mode is set to "destroyed".

Explanation

The command shown specifies the volume whose name is displayed, but the volume cannot be accessed because its status is destroyed.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 Command:
25E Unable to access volume *volume name* - access mode is set to "offsite".

Explanation

The command shown specifies the volume whose name is displayed, but the volume cannot be accessed because its status is offsite.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 Backupset
26I *backup set name* defined for node *node name* (data type *data type*).

Explanation

The backup set has been defined for the indicated node.

System action

The server has defined the backupset.

User response

None.

ANR24 Backupset
27E *backup set name* for node *node name* (data type *data type*) was

not deleted.
Device class *device class name* was not found.

Explanation

The specified backup set was not deleted because the device class used to generate it was not found.

System action

The backup set is not deleted.

User response

If the device class was inadvertently deleted, redefine it, then delete the backup set again.

ANR24 Backupset
28E *backup set name* for node *node name* (data type *data type*) has not been deleted due to error *error code*.

Explanation

The backup set has not been deleted.

System action

The server has not deleted the backupset.

User response

Check related error messages.

ANR24 Volume
29W *volume name* contains *object count* objects that reside only in a cloud-container storage pool.

Explanation

Depending on your cloud storage provider, restoring from cloud storage might incur extra costs. Some objects that reside on this volume are only stored in a cloud-container storage pool, so those objects were not deleted.

System action

The server deleted all objects in the specified volume except those objects that reside only in a cloud-container storage pool.

User response

To finish deleting objects from the volume, complete the following steps:

1. Determine which objects still reside on the volume by issuing the QUERY CONTENT command.
2. Optionally, attempt to restore the objects from a tape storage pool before you delete them from the volume to avoid costs that are incurred from restoring from cloud storage. Restoring an object from a tape storage pool might not be possible if the object is damaged.
3. To delete the remaining objects from the volume, reissue the AUDIT VOLUME or DELETE VOLUME command. In the confirmation message, confirm that you want to delete the remaining objects.

ANR24 The server
31E master encryption key has changed since server initialization and is no longer valid. Database backup operations are not available.

Explanation

The master encryption key used to protect administrator and node passwords has changed since server initialization, possibly due to unexpected changes to the server key database, dsmkeydb.kdb. Database backup operations will not be available until the master encryption key is valid.

System action

The server cannot process database backup operations.

User response

Restore the master encryption key from a previous database backup using the DSMSEV RESTORE DB command. Specify RESTOREKEYS=ONLY to only restore the server master encryption key.

ANR24 Command: A
33E database define, delete, extend, reduce, or backup operation is already in progress.

Explanation

The specified command has been entered while a command that is modifying or backing up the database is already active.

System action

The server does not process the command.

User response

Wait for other activity to end, and reissue the command.

ANR24 34E The Command command failed because encryption and compression cannot be enabled simultaneously.

Explanation

A CLOUD device class is enabled for encryption by default. However, restrictions on database backup operations to cloud object storage prevent the encryption and compression options from being concurrently set to YES.

System action

The server does not process the command.

User response

Ensure that only encryption or compression is enabled.

- To turn off encryption, specify ENCRYPT=NO.
- To turn off compression, specify COMPRESS=NO.

Then, reissue the command that previously failed.

ANR24 35E The Command command failed. Encryption can be set only if the device class is CLOUD.

Explanation

The ENCRYPT parameter applies only to CLOUD device classes.

System action

The server does not process the command.

User response

Reissue the command without specifying the ENCRYPT parameter.

ANR24 36E Command: Server server name is the target of a replication storage rule that is already running.

Explanation

The command shown specifies a server that is currently being replicated to by another storage rule.

System action

The server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current replication and reissue the command.

ANR24 39E Command: Unable to vary database volume volume name offline - mirrored copies not synchronized.

Explanation

A VARY OFFLINE command has been entered, but mirrors of the volume to be varied are not up to date.

System action

The server does not process the command.

User response

Try the command at a later time (after database volumes have been synchronized).

ANR24 40E Command: Unable to vary database volume volume name offline - only copy.

Explanation

A VARY OFFLINE command has been entered, but the database volume has no mirrors and therefore contains the only copy of the data on that volume.

System action

The server does not process the command.

User response

None.

ANR24 42E Command: Off-Premise cloud-container pool pool name - is

not valid in a storage rule.

Explanation

The command shown specifies an off-premise cloud-container pool whose name is displayed, but the off-premise cloud-container pools cannot be used as part of a storage rule.

System action

The server does not process the command.

User response

Choose a directory-container pool or on-premise cloud-container pool and reissue the command.

ANR24 43E Command: cloud-container pool pool name cannot be both source pool and target pool of tiering.

Explanation

The command shown specifies a cloud-container pool as both the source and target pool of a tiering storage rule. The same pool cannot be both the source and target of a tiering storage rule.

System action

The server does not process the command.

User response

Choose a different cloud-container pool and reissue the command.

ANR24 44E *Command: A recovery log define, delete, extend, or reduce operation is already in progress.*

Explanation

The specified command has been entered while a command that is modifying the recovery log is already active.

System action

The server does not process the command.

User response

Wait for other activity to end, and reissue the command.

ANR24 45E *Command: volume name is a container. Use the MOVE CONTAINER command to move containers in a container storage pool.*

Explanation

A MOVE DATA command will not process container files. Please use MOVE CONTAINER.

System action

The server does not process the command.

User response

Use the MOVE CONTAINER command.

ANR24 46E *The Command cannot be processed. The*

node is an object client node and must be assigned to a policy domain that is defined as an object domain.

Explanation

The specified node is registered as an object client node. An object client node must be assigned to a policy domain that supports object clients.

System action

Server operation continues, but the command is not processed.

User response

To resolve the issue, complete the following steps:

1. Specify a valid policy domain for an object client node. To define a policy domain as an object domain, issue the DEFINE OBJECTDOMAIN command. For example, to create an object domain that is named ARCHIVEDATA, issue the following command: define objectdomain archivedata
2. Reissue the command that failed.

ANR24 47E *The Command cannot be processed. Only a node that is defined as an object client node can be*

assigned to a policy domain that is defined as an object domain.

Explanation

The specified node is not registered as an object client node. Only nodes that are registered as object client nodes can be assigned to object policy domains.

System action

Server operation continues, but the command is not processed.

User response

To resolve the issue, complete the following steps:

1. To register the node as an object client node, issue the REGISTER NODE command and specify the TYPE=OBJECTCLIENT parameter value.
2. Specify a valid policy domain for the object client node. To define a policy domain as an object domain, issue the DEFINE OBJECTDOMAIN command. For example, to create an object domain that is named ARCHIVEDATA, issue the following command: define objectdomain archivedata
3. Reissue the command that failed.

ANR24 51E *Command: Unable to vary recovery log volume volume*

name offline - only copy.

Explanation

A VARY OFFLINE command has been entered, but the recovery log volume has no mirrors and contains the only copy of the data on that volume.

System action

The server does not process the command.

User response

None.

ANR24 52E *Command: The password expiration cannot be reset for ObjectClient nodes.*

Explanation

The RESET PASSEXP command cannot be issued for ObjectClient nodes.

System action

Server operation continues, but the command is not processed.

User response

None.

ANR24 53W *Command: The password expiration cannot be set for ObjectClient nodes.*

Explanation

The SET PASSEXP command cannot be

issued for ObjectClient nodes.

System action

Server operation continues, but the node is not processed.

User response

None.

ANR24 54E Command: The storage pool specified with option "option" is not compatible with the option's intended use.

Explanation

The command specifies a Retention storage pool. Such storage pools are not available for use with certain data movement operations such as move nodedata or migration.

System action

The server does not process the command.

User response

Issue the command again with a storage pool appropriate for the desired function.

ANR24 55E Command: Unable to access associated volume *volume name* - access mode is set to "destroyed".

Explanation

The specified command would require access to the volume whose name is displayed (because

data from the volume specified in the command spans into this volume); the volume shown cannot be accessed because its status is destroyed.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 56E Command: Unable to access associated volume *volume name* - access mode is set to "offsite".

Explanation

The command shown would require access to the volume whose name is displayed (because data from the volume specified in the command spans into this volume); the volume shown cannot be accessed because its status is offsite.

System action

The server does not process the command.

User response

If necessary, reset the status of the volume and reissue the command.

ANR24 57E Command: Backup of primary storage pool *primary pool name* to copy storage pool *copy pool*

name already in progress.

Explanation

The command shown specifies a backup operation that is already in progress.

System action

The server does not process the command.

User response

Reissue the command after the current backup operation ends.

ANR24 58E Command: Restore of primary storage pool *primary pool name* (or volumes in that storage pool) already in progress.

Explanation

The command shown cannot be processed because a restore operation involving the indicated storage pool is already in progress. Either a RESTORE STGPPOOL command is in progress for the indicated storage pool or a RESTORE VOLUME command is in progress for volumes that belong to the indicated storage pool.

System action

The server does not process the command.

User response

Reissue the command after the current restore operation ends.

ANR24 59E Command: Volume *volume name* cannot be updated - a restore operation involving that volume is in progress.

Explanation

The indicated volume has an access mode of destroyed. Either a RESTORE STGPPOOL command or a RESTORE VOLUME command is in progress to restore the contents of the indicated volume.

System action

The server does not process the command.

User response

If necessary, cancel the restore processing and update the volume.

ANR24 60E Command: Server could not write sequential volume history information to *File name*.

Explanation

The BACKUP VOLHISTORY command does not complete successfully because the server cannot write to the file name specified.

System action

The server does not process the command.

User response

Make sure that the server has proper authority to

write to the file indicated and that sufficient space is available in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set.

ANR24 Command: An internal error was encountered in writing sequential volume history information to file name.

Explanation

The BACKUP VOLHISTORY command does not complete successfully because the server cannot write to the file name specified.

System action

The server does not process the command.

User response

Examine error messages on the server console that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that sufficient space is available in the file system for the file. On MVS, make sure that the data set has been allocated and that the server has authority to write to the data set.

ANR24 Command: Server sequential volume history

information was written to file name.

Explanation

This message is displayed in response to the BACKUP VOLHISTORY command and indicates that sequential volume history information was successfully written to the file name indicated.

System action

The server records sequential volume history information to the file name specified.

User response

None.

ANR24 Command: Server sequential volume history information was written to all configured history files.

Explanation

This message is displayed in response to the BACKUP VOLHISTORY command and indicates that sequential volume history information was successfully written to all files that were specified in the server options file.

System action

The server records sequential volume history information to the configured files.

User response

None.

ANR24 Access Key 64W IDobject client access key ID for replicated node node name is in use by another node.

Explanation

Use a unique Access Key ID for each node on the target replication server.

System action

The server operation continues, however, the Access Key ID and Secret Access Key pair for this object client node are not set.

User response

To generate a new Access Key ID and Secret Access Key pair and replicate the node again, issue the UPDATE NODE command on the source replication server.

ANR24 Command: The 65E argument parameter is invalid for nodes with TYPE=OBJECTCLIENT.

Explanation

The specified command has been issued with an invalid parameter for a node of type objectclient.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify only valid parameters for an objectclient node.

ANR24 Command: An 66E internal server error was encountered in writing sequential volume history information to one or more of the defined volume history files.

Explanation

The BACKUP VOLHISTORY command does not complete successfully because the server cannot write to one or more of the defined volume history files.

System action

The server does not process the command.

User response

Examine error messages on the server console that may have been displayed prior to this message and correct any problems, if possible. Contact your service representative if you are unable to resolve the problem.

ANR24 Command: 67I number of entries deleted sequential volume history entries were successfully deleted.

Explanation

The DELETE VOLHISTORY command successfully deleted the number of entries specified.

System action

Server operation continues.

User response

None.

ANR24 Command: An 68E *Command: An internal server error was encountered while deleting server sequential volume history information.*

Explanation

The DELETE VOLHISTORY command fails because an internal server error has been encountered.

System action

The DELETE VOLHISTORY command fails, and server operation continues.

User response

Examine the messages in the activity log or server console that were displayed prior to the error to see if the error can be resolved. Contact your service representative if this error cannot be resolved.

ANR24 Command: 69E *Invalid volume history type: history type.*

Explanation

The command failed because an invalid sequential volume history type was specified for the TYPE= parameter.

System action

The command fails, and server operation continues.

User response

Reissue the command and specify a valid type value.

ANR24 The new 70I *The new authentication credentials for object client node node name are: Access Key ID: Access Key ID, Secret Access Key: Secret Access Key.*

Explanation

Use these credentials to sign on with the OBJECTCLIENT type.

System action

The server operation continues.

User response

Record the Access Key ID and Secret Access Key so that you can configure the object storage client to authenticate to the server.

ANR24 command: 71E *GENERATEKEYS only allowed for nodes with TYPE=OBJECTCLIENT.*

Explanation

This message is displayed when an UPDATE NODE command with GENERATEKEYS is issued for a node that is defined with node type other than objectclient.

System action

Server operation continues.

User response

Verify that the node to be updated has a node type of objectclient.

ANR24 Command: 72E *Invalid volume specified: volume name.*

Explanation

The command failed because the sequential history volume specified is not a DB DUMP, DB BACKUP, or EXPORT volume.

System action

The command fails, and server operation continues.

User response

Reissue the command and specify a valid volume name.

ANR24 Command for 73I *volume volume name completed.*

Explanation

The command completed and the volume history file has been updated.

System action

The server records sequential volume history information.

User response

None.

ANR24 Command: 74E *Input volume names must be specified with the VOLumentnames= parameter.*

Explanation

The command failed because input volume names were not specified with the VOLumentnames parameter.

System action

The command fails.

User response

On some platforms, or with certain device classes, the server cannot prompt to mount input removable media volumes, so the names of the required volumes must be specified in the command. Reissue the command specifying the name(s) of volumes that should be mounted for input.

ANR24 Command: File 75E *file name could not be opened.*

Explanation

The DSMSERV command could not be completed successfully because the file specified (to contain the list of volumes to be used) cannot be opened.

System action

The DSMSERV command fails.

User response

Examine the file name that was specified in the DSMSERV command. Correct the specification, if necessary, so that it specifies the name of a file that exists and is accessible by the server program. Reissue the DSMSERV command if this can be corrected. Contact your service representative if this error cannot be resolved.

ANR24 76I License storage auditing is disabled, no output available.

Explanation

The license storage occupancy function is currently disabled.

System action

None.

User response

To obtain storage occupancy results, remove the NOAUDITSTORAGE or AUDITSTORAGE NO option from the server options file, then restart the server and issue the AUDIT LICENSES command.

ANR24 77I License storage auditing is disabled, storage values may be outdated and should be ignored.

Explanation

The license storage occupancy function is currently disabled.

System action

None.

User response

To obtain storage occupancy results, remove the NOAUDITSTORAGE or AUDITSTORAGE NO option from the server options file, then restart the server and issue the AUDIT LICENSES command.

ANR24 78E Command: Command cannot be executed in this session.

Explanation

The command indicated is not supported by the session in which it was invoked. For example, a DEFINE CURSOR command can not be invoked from the server's primary console.

System action

The server does not process the command.

User response

The command must be issued from a standard administrator session.

ANR24 79E Command: Invalid SQL cursor name - SQL cursor name.

Explanation

The command indicated contains an invalid SQL cursor name.

System action

The server does not process the command.

User response

Reissue the command with a valid SQL cursor name.

ANR24 80E Command: SQL cursor name SQL cursor name is already defined.

Explanation

The command indicated specifies an SQL cursor name that has already been defined.

System action

The server does not process the command.

User response

Reissue the command and specify a different cursor name.

ANR24 81E Command: SQL cursor name SQL cursor name is not defined.

Explanation

The command indicated specifies an SQL cursor name that has not been defined.

System action

The server does not process the command.

User response

Use the DEFINE CURSOR command to first define the cursor.

ANR24 82E Command: SQL cursor SQL cursor name is already open.

Explanation

The command indicated failed because an SQL cursor is already open.

System action

The server does not process the command.

User response

Use the CLOSE CURSOR command to first close the current cursor.

ANR24 83E Command: No SQL cursor is currently open.

Explanation

The command indicated failed because no SQL cursor is currently open.

System action

The server does not process the command.

User response

Use the OPEN CURSOR command to first open a cursor.

ANR24 84E Command: Invalid SQL date-time display format - SQL date-time display format name.

Explanation

The command indicated contains an invalid SQL date-time display format name.

System action

The server does not process the command.

User response

Reissue the command with a valid SQL date-time format name.

ANR24 Command: 85E Invalid SQL display format - SQL display format name.

Explanation

The command indicated contains an invalid SQL display format name.

System action

The server does not process the command.

User response

Reissue the command with a valid SQL display format name.

ANR24 Command: 86E Invalid SQL character arithmetic mode - SQL arithmetic mode.

Explanation

The command indicated contains an invalid SQL arithmetic mode name.

System action

The server does not process the command.

User response

Reissue the command with a valid SQL arithmetic mode name.

ANR24 Command: An 87E SQL expression is required.

Explanation

The command indicated requires that an SQL expression be provided through the SQL keyword parameter.

System action

The server does not process the command.

User response

Reissue the command specifying an SQL expression.

ANR24 List file list file 88W name could not be opened.

Explanation

While attempting to read or write a sequential file list, the server was unable to open the file name specified.

System action

The server does not use the list file.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. For OUTFILE files, make sure that the server has proper authority to write to the file indicated and that there is sufficient space in the file system for the

file. On OS/390 and z/OS, make sure that the server has authority to write to the data set.

ANR24 An error was 89W encountered writing to volume list file volume list file name.

Explanation

While attempting to write to the sequential file for a volume list an error occurs on the file name specified. The volume list is not be complete and should not be used for input.

System action

The server stops writing to the file.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that there is sufficient space in the file system for the file. On MVS, make sure that the server has authority to write to the data set. Obtain the volume list from console messages, the QUERY VOLHISTORY command or the volume history file, if it is used.

ANR24 Command: 90E NODENAMES and SERVERNAMES parameters cannot both be specified in the same command.

Explanation

The command indicated failed because both the nodenames parameter and the servernames parameter were specified.

System action

None.

User response

Determine whether you want the action taken for one or more nodes or for one or more servers and reenter the command with only the correct parameter specified.

ANR24 Volume creation 91I process starting for volume name, Process ID process ID.

Explanation

As a result of a DEFINE VOLUME command with the SIZE=xxx parameter, a new volume is being created. The process whose ID is displayed has begun to create the volume shown.

System action

The server creates the volume and adds it to the server.

User response

None.

ANR25 Schedule 00I schedule name defined in policy domain domain name.

Explanation

This message is displayed in response to the DEFINE SCHEDULE command. The schedule named *schedule name* has been defined in the policy domain named *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR25 01I Schedule *schedule name* deleted from policy domain *domain name*.

Explanation

This message is displayed in response to the DELETE SCHEDULE command. The schedule named *schedule name* has been deleted from the policy domain named *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR25 02I Schedule *schedule name* updated in policy domain *domain name*.

Explanation

This message is displayed in response to the UPDATE SCHEDULE

command. The schedule named *schedule name* has been updated in the policy domain named *domain name* in the server database.

System action

Server operation continues.

User response

None.

ANR25 03I Schedule *schedule name* in domain *domain name* copied to schedule *new schedule name* in domain *new domain name*.

Explanation

This message is displayed in response to the COPY SCHEDULE command. The schedule named *schedule name* in policy domain *domain name* has been copied to the schedule named *new schedule name* in the policy domain named *new domain name*. Node associations have not been copied.

System action

Server operation continues.

User response

None.

ANR25 04I Schedule *schedule name* deleted.

Explanation

This message is displayed in response to the

DELETE SCHEDULE command. The schedule named *schedule name* has been deleted from the server database.

System action

Server operation continues.

User response

None.

ANR25 05I *number of schedules* schedules were defined for *command*.

Explanation

number of schedules were generated and nodes successfully associated for the *command* issued.

System action

Server operation continues.

User response

If the number is less than expected, check the *nodeList* and *domainList* combination specified to the DEFINE CLIENTACTION command. Schedules are generated when at least one node in the *nodeList* exists in a domain in the *domainList*.

ANR25 06I Node *node name* associated with schedule *schedule name* in policy domain *domain name* processed. *rc=return code*.

Explanation

This message is displayed in response to the DEFINE CLIENTACTION WAIT=YES command. Node *node name* is associated with the schedule named *schedule name* in policy domain *domain name* has been processed. name The result is indicated in the return code *return code*.

System action

Server operation continues.

User response

If the return code is non-zero, issue the QUERY ACTLOG command to view the activity log and search for the error messages. After the error has been resolved, restart the scheduled operations.

ANR25 07I Schedule *schedule name* for domain *domain name* started at *start timestamp* for node *node name* completed successfully at *timestamp*.

Explanation

The scheduled operation for the *domain name* and *schedule name* specified was processed. It was processed for node *node name* and completed successfully at the indicated time.

System action

Server operation continues.

User response

This message is intended to report the completion state of a scheduled client action. This message indicates that the scheduled action completed successfully.

ANR25 Trace Tsmtrcfm 08E failed: A tracefile name is required.

Explanation

Trace Tsmtrcfm doesn't output to console

System action

Trace won't start without a tracefile name for Trace Tsmtrcfm

User response

Issue the command with a tracefile name.

ANR25 Command: 09E Invalid Virtual file space name - vfs name.

Explanation

The specified server command has been entered with a virtual file space name that is longer than allowed.

System action

The server does not process the command.

User response

Reissue the command with a valid virtual file space name.

ANR25 Node node name 10I associated with schedule schedule name

in policy domain domain name.

Explanation

This message is displayed in response to the DEFINE ASSOCIATION command. Node *node name* is associated with the schedule named *schedule name* in policy domain *domain name*. Schedule *schedule name* is now applied to node *node name*.

System action

Server operation continues.

User response

None.

ANR25 Node node name 11I disassociated from schedule schedule name in policy domain domain name.

Explanation

This message is displayed in response to the DELETE ASSOCIATION command. Node *node name* is no longer associated with the schedule named *schedule name* in policy domain *domain name*.

System action

Server operation continues.

User response

None.

ANR25 Event records 12I deleted: record count.

Explanation

This message is displayed in response to the DELETE EVENT command. A total of *record count* event records have been deleted from the database.

System action

Server operation continues.

User response

None.

ANR25 Schedule 13I schedule name copied to schedule new schedule name.

Explanation

This message is displayed in response to the COPY SCHEDULE command. The schedule named *schedule name* has been copied to the schedule named *new schedule name*.

System action

Server operation continues.

User response

None.

ANR25 Command: 14E Virtual file space name vfs name conflicts with file space on the network attached storage (NAS) device.

Explanation

The specified server command has been entered with a virtual file space that has the same name as a File space on the NAS device.

System action

The server does not process the command.

User response

Ensure that no virtual file space mappings for this NAS device have the same name as an actual file space that exists on the NAS device.

ANR25 Command: A 15I virtual file space mapping named vfs name for node node name has been defined.

Explanation

In response to the DEFINE VIRTUALFSMAPPING command, a virtual file space mapping for the specified node has been defined in the server database.

System action

Server operation continues.

User response

None.

ANR25 Command: The 16E specified file space, fs name, does not exist on the NAS device associated with

the node *node name*.

Explanation

The specified server command has been entered with a file space that does not exist on the associate NAS device.

System action

The server ignores the command.

User response

Reissue the command with a valid file space name from the NAS device.

ANR25 17E *Command: The virtual file space **vfs name** is already defined for node **node name**.*

Explanation

The specified command has been issued with a virtual file space name that has already been defined for the indicated node.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a virtual file space name that has not already been defined for this node.

ANR25 18E *Command: A virtual file space mapping already exists to the specified*

node, file space and path.

Explanation

The specified command has been issued with a node, file space and path for which there is already a virtual file space mapping defined.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a file space and path that does not already have a mapping defined.

ANR25 19E *Command: The file space, **fs name**, does not exist on the NAS device associated with the node **node name**.*

Explanation

During a Backup of a virtual file space mapping for a NAS device, the server detected that the file space upon which the virtual file space resides does not exist on the associated NAS device.

System action

The server ignores the command.

User response

Use QUERY VIRTUALFSMAPPING to verify that the virtual file space mapping is defined correctly.

ANR25 20I *Scheduled sessions set to **percent percent**.*

Explanation

This message is displayed in response to the SET MAXSCHEDESESSIONS command. It indicates the percentage of total server sessions that can be used for the processing of scheduled work.

System action

Server operation continues.

User response

None.

ANR25 21I *Event record retention period set to **days days**.*

Explanation

This message is displayed in response to the SET EVENTRETENTION command. It indicates the number of days for which event records are retained in the database.

System action

Server operation continues.

User response

None.

ANR25 22I *Randomization set to **percent percent**.*

Explanation

This message is displayed in response to the SET RANDOMIZE command. It indicates the percentage of the

startup window over which the start times for individual clients are distributed.

System action

Server operation continues.

User response

None.

ANR25 23I *Schedule query period set to **hours hour(s)**.*

Explanation

This message is displayed in response to the SET QUERYSCHEDPERIOD command. It indicates the number of hours between attempts by the client to contact the server for scheduled commands.

System action

Server operation continues.

User response

None.

ANR25 24I *Schedule query period reset to **value** determined by each client.*

Explanation

This message is displayed in response to the SET QUERYSCHEDPERIOD command.

System action

Server operation continues.

User response

None.

**ANR25 Maximum
25I number of
command
retries set to
retries.**

Explanation

This message is displayed in response to the SET MAXCMDRETRIES command. It indicates the maximum number of times the client scheduler retries a command after a failed attempt to process a scheduled command.

System action

Server operation continues.

User response

None.

**ANR25 Maximum
26I number of
command
retries reset to
value
determined by
each client.**

Explanation

This message is displayed in response to the SET MAXCMDRETRIES command.

System action

Server operation continues.

User response

None.

**ANR25 Retry period set
27I to minutes
minutes.**

Explanation

This message is displayed in response to the SET RETRYPERIOD command. It indicates the number of minutes between attempts by the client scheduler to retry, after a failed attempt, to contact the server or to process a scheduled command.

System action

Server operation continues.

User response

None.

**ANR25 Retry period
28I reset to value
determined by
each client.**

Explanation

This message is displayed in response to the SET RETRYPERIOD command.

System action

Server operation continues.

User response

None.

**ANR25 Scheduling
29I mode set to
POLLING.**

Explanation

This message is displayed in response to the SET SCHEDMODES command. With client-polling scheduling, a client queries the server at prescribed time intervals to obtain scheduled work or to ensure that the schedules the client is waiting

to process have not changed.

System action

Server operation continues.

User response

None.

**ANR25 Scheduling
30I mode set to
PROMPTED.**

Explanation

This message is displayed in response to the SET SCHEDMODES command. With server-prompted scheduling, the server contacts the client when scheduled work needs to be performed and a session is available.

System action

Server operation continues.

User response

None.

**ANR25 Scheduling
31I mode set to
ANY.**

Explanation

This message is displayed in response to the SET SCHEDMODES command. The server now allows clients to run in either the client-polling or the server-prompted scheduling mode.

System action

Server operation continues.

User response

None.

**ANR25 Schedule
32I schedule name
updated.**

Explanation

This message is displayed in response to the UPDATE SCHEDULE command. The schedule named *schedule name* has been updated in the server database.

System action

Server operation continues.

User response

None.

**ANR25 Client action
33I schedule
duration set to
days days.**

Explanation

This message is displayed in response to the Set CLIENTACTDuration command. It indicates the number of days for which schedules and associations generated by the DEFINE CLIENTAction are retained in the database.

System action

Server operation continues.

User response

None.

**ANR25 Client action
34I schedule
schedule name
was not
executed by**

node name in
domain name.

Explanation

Immediate client action *schedule name* was not executed by node *node name*, which is in domain *domain name*. The schedule is being deleted.

System action

Server operation continues.

User response

None.

ANR25 35E *Command: The node **node name** cannot be removed or renamed because it has an associated data mover.*

Explanation

You attempted to remove or rename a node that has an associated data mover.

System action

The server does not remove or rename the node.

User response

To remove or rename the node, delete the associated data mover and reissue the command.

ANR25 36E *Command: The "option" option is not valid with the storage pool's data format.*

Explanation

The command indicated includes an option that is not valid with the specified (or defaulted) data format for the storage pool.

System action

The server does not process the command.

User response

Reissue the command with options appropriate for the desired data format of the storage pool.

ANR25 37E *Command: Device class **device class name** has a device type that is not allowed for this operation.*

Explanation

The device class in the indicated command has a device type that is not allowed for this operation.

System action

The server does not process the command.

User response

Choose a different device class and reissue the command.

ANR25 38E *The **Command** command was not processed. A backup set cannot be generated for node **node name**.*

Explanation

The specified node is registered either as a network-attached storage (NAS) node or as an object client node. Backup sets cannot be generated for nodes that are specified with the TYPE=NAS or the TYPE=OBJECTCLIENT parameter values.

System action

System operation continues, but the server does not process the command.

User response

No action is required.

ANR25 39E *Command: Storage pool **Storage Pool Name** does not have a valid data format.*

Explanation

The data format of the indicated storage pool is not valid for the requested operation. The storage pool must have NATIVE or NONBLOCK data format. The server is unable to perform the requested operation.

System action

The command fails.

User response

Choose a different storage pool with the appropriate data format and reissue the command.

ANR25 40E *Command: The "option" device class is not valid*

with the storage pool's data format.

Explanation

The command indicated specifies a device class that is not valid with the specified (or defaulted) data format for the storage pool.

System action

The server does not process the command.

User response

Reissue the command with a data class appropriate for the desired data format of the storage pool.

ANR25 41E *Command: The storage pool specified with option "option" is not compatible with the option's intended use.*

Explanation

The command specifies a storage pool whose device class is a Centera device. Such storage pools are not available for use with data movement operations such as reclaim or attributes such as copy, active-data, or reclaim storage pools.

System action

The server does not process the command.

User response

Issue the command again with a storage

pool appropriate for the desired function.

ANR25 42E Command: The storage pool is not compatible with the operation's intended use.

Explanation

The command specifies a storage pool whose device class is a Centera device. Such storage pools are not available for use with data movement operations, such as reclaim, or attributes, such as copy or reclaim storage pools.

System action

The server does not process the command.

User response

Issue the command again with a storage pool appropriate for the desired function.

ANR25 43E Command: The volume name is not compatible with the operation's intended use.

Explanation

The command specifies a volume that resides in a storage pool whose device class is a Centera device. Such volumes are not available for use with data movement operations, such as reclaim, or attributes, such as copy or reclaim storage pools.

System action

The server does not process the command.

User response

Issue the command again with a volume appropriate for the desired function.

ANR25 44E Unable to open the centera device at hla hla.

Explanation

The server cannot start communication with the device at the specified HLA.

System action

The transaction needing this device fails.

User response

Verify that the hla specified in the device class is correct, verify that the centera device is operational.

ANR25 45E The version of the centera library, version, is not compatible with the server.

Explanation

The centera library must be at least version 2 to be able to be compatible with the server.

System action

The transaction fails.

User response

Contact your service representative.

ANR25 46E The centera device is not capable of performing the required operation, version.

Explanation

The centera device must be capable of reading, writing and deleting objects. The device is not capable of performing at least one of these operations.

System action

The transaction fails.

User response

Contact your service representative.

ANR25 47E A Centera device (devclass) reported error "message,error" during command Centera command.

Explanation

The Centera device reported an error while performing the specified command.

System action

The operation fails.

User response

Verify that the IP addresses specified in the device class associated with the storage pool are correct. Contact your service representative if the problem persists.

ANR25 48I NAS command: Renaming file space *filespace name* for node *node name* to file space *new filespace name*.

Explanation

The NAS Backup process detected a name conflict between the Virtual file space *filespace name* and a file space on the NAS device associated with the node *node name*. The Virtual file space is renamed to the *new filespace name*. During a NAS backup process, if the object to be backed up is a Virtual file space, IBM Storage Protect will verify that this name does not also exist as a file space on the NAS device. If a name conflict exists, IBM Storage Protect will rename the existing Virtual file space and the associated file space definition, if one exists.

System action

NAS Backup processing for the command continues.

User response

None; however, users should make note of the original Virtual file space *filespace name* and the new *new filespace name* so that they know where the backup data for this Virtual file space is located. Note, the RENAME FILESPACE command may be used to rename the Virtual file space to a more appropriate name.

ANR25 49E Command:
Invalid virtual file space name. A virtual file space mapping name must have a forward slash as the first character.

Explanation

The specified server command has been entered with a virtual file space name that is does not have a forward slash as the first character.

System action

The server does not process the command.

User response

Reissue the command with a valid virtual file space name.

ANR25 50W Command:
Modifying the virtual file space mapping VFS Name for Celerra NAS device NAS device may prevent data from being recovered. If you modify this definition, save the existing file space and path settings so that the definition may be reverted to its original state.

Explanation

An UPDATE VIRTUALFSMAPPING has been entered for a Celerra NAS device.

Modifying a Celerra virtual file space definition may prevent the data from being recovered. If you are modifying this definition in order to recover data, you should revert the changes back to their original values after the recovery is performed.

System action

The system asks whether you wish to continue with the command.

User response

To process the UPDATE VIRTUALFSMAPPING command, enter 'Y' to continue or 'N' to stop the process.

ANR25 51E Command: A virtual file space mapping for a Celerra NAS device cannot be modified.

Explanation

You cannot modify a virtual file space definition for a Celerra NAS device. If the directory has been relocated on the NAS device then create a new virtual file space mapping to point to the new location.

System action

The server does not process the command.

User response

Define a new virtual file space mapping for this NAS filesystem and path.

ANR25 52I Server now enabled for

session type access.

Explanation

The server has been made available for use by the specified session types with the ENABLE command.

System action

None.

User response

None.

ANR25 53I Server now disabled for session type access.

Explanation

The server has been made unavailable for use by the specified session types with the DISABLE command.

System action

None.

User response

None.

ANR25 54I Format lfvolume process process id ended for storage pool pool name, number of volumes requested volumes requested, number of volumes formatted volumes formatted.

Explanation

The FORMAT LFVOLUME process for the storage pool shown has ended. The number of volumes requested to be formatted, and the number of volumes actually formatted are displayed.

System action

None.

User response

If the number of volumes formatted is less than the number of volumes requested to be formatted, check the activity log for messages indicating the reason for the difference. Possible reasons include the process was canceled, no more scratch volumes are allowed in the storage pool, or an error occurred processing a scratch volume.

ANR25 56W The managed server server name is not capable of using enhanced style client schedule schedule name in domain domain name. The domain will not be propagated to this server.

Explanation

The managed server *server name* is subscribed to domain *domain name* that contains client schedule *schedule name* that uses enhanced style syntax. The managed server is not capable

of using an enhanced style schedule. Only IBM Storage Protect servers that are at least Version 5 Release 3 are capable of using enhanced style schedules.

System action

Server operation continues. The domain will not be propagated to the managed server.

User response

Consider upgrading the managed server to at least IBM Storage Protect Version 5 Release 3.

ANR25 57W The managed server *server name* is not capable of using the enhanced style administrative schedule *schedule name*. The administrative schedule will not be propagated to this server.

Explanation

The managed server *server name* is subscribed to an administrative schedule that uses enhanced style syntax. The managed server is not capable of using an enhanced style schedule. Only IBM Storage Protect servers that are at least Version 5 Release 3 are capable of using enhanced style schedules.

System action

Server operation continues. The administrative schedule will not be propagated to the managed server.

User response

Consider upgrading the managed server to at least IBM Storage Protect Version 5 Release 3.

ANR25 58W *command: One* or more managed servers that subscribe to domain *domain name* which contains client schedule *schedule name* are not capable of using an enhanced style schedule.

Explanation

The client schedule *schedule name* uses enhanced style schedule syntax. The schedule is in a domain which is a managed object and one or more of the managed servers that subscribe to it are not capable of using an enhanced style schedule. Only IBM Storage Protect servers that are at least Version 5 Release 3 are capable of using enhanced style schedules. During configuration refresh processing, the domain will not be propagated to managed servers that are not capable of using it.

System action

Server operation continues.

User response

Consider upgrading managed servers to at least IBM Storage Protect Version 5 Release 3.

ANR25 59W *command: One* or more managed servers that subscribe to administrative schedule *schedule name* are not capable of using an enhanced style schedule.

Explanation

The administrative schedule *schedule name* uses enhanced style schedule syntax. The schedule is a managed object and one or more of the managed servers that subscribe to it are not capable of using an enhanced style schedule. Only IBM Storage Protect servers that are at least Version 5 Release 3 are capable of using enhanced style schedules. During configuration refresh processing, The schedule will not be propagated to managed servers that are not capable of using it.

System action

Server operation continues.

User response

Consider upgrading managed servers to at least IBM Storage Protect Version 5 Release 3.

ANR25 60I Schedule manager started.

Explanation

The schedule manager is started when the server is initialized. The schedule manager maintains entries of scheduled operations.

System action

Server operation continues.

User response

None.

ANR25 61I Schedule prompter contacting *node name* (session *session number*) to start a scheduled operation.

Explanation

The schedule prompter contacts the client scheduler for node *node name* because a scheduled operation should be started for that node.

System action

Server operation continues.

User response

None.

ANR25 62I Automatic event record deletion started.

Explanation

A process has been started to delete event records for which the retention period has elapsed.

System action

Server operation continues.

User response

None.

ANR25 63I Removing event records dated prior to *date time*.

Explanation

Events that were scheduled to start prior to *date time* are automatically deleted unless their startup window has not yet elapsed.

System action

Server operation continues.

User response

None.

ANR25 64I Automatic event record deletion ended - *record count* records deleted.

Explanation

The event deletion process has ended. A total of *record count* event records have been deleted from the database.

System action

Server operation continues.

User response

None.

ANR25 65I *schedules* schedules for

immediate client actions have been deleted.

Explanation

A total of *schedules* that were generated by the DEFINE CLIENTACTION command have expired and been deleted from the database.

System action

Server operation continues.

User response

None.

ANR25 66E An error occurred while deleting immediate client action schedules.

Explanation

Processing did not complete for deleting schedules that were generated by the DEFINE CLIENTACTION command.

System action

Server operation continues.

User response

Check the activity log for other messages that might relate to this failure. Correct any memory or space problems.

ANR25 67W Schedule prompter skipped contact attempt with *node name* to start a

scheduled operation.

Explanation

The schedule prompter skipped the contact attempt with the client scheduler for node *node name* because the start-up window has passed for that node, or the node was locked.

System action

Server operation continues.

User response

Check the length of the schedule start-up window to see if it needs to be increased. Check the activity log for ANR2716E messages. These messages are associated with failures to contact a client scheduler. If there are an excessive number of these messages the schedule window could have elapsed waiting for TCP/IP timeouts from these failed attempts. Also, check to see if the client node is locked. The contact attempt would be skipped for a locked node.

ANR25 68E Request for node *node* to start schedule *schedule* at *startTime* is denied. Current time is *now*.

Explanation

The client scheduler attempted to start the specified instance of a schedule for a node. The request was denied

because that instance is still in the future.

System action

Server operation continues. The node does not start the schedule.

User response

Check the client schedule and error logs for problems with the network or the preschedule command. Also, you may need to upgrade the client.

ANR25 69E Request by node *node* to report results (*result*, *code code*) for schedule *schedule* at *startTime* is denied. Current time is *now*.

Explanation

The client scheduler attempted to report the results of executing the specified schedule. However, the schedule occurs in the future. The results will not be saved.

System action

Server operation continues. The results will not be saved.

User response

Check the client schedule and error logs for problems with the network or the preschedule command. Also, you may need to upgrade the client.

ANR25 70W A scheduled session has been denied. The schedule

<p>manager is not active.</p> <p>Explanation</p> <p>The client scheduler attempts to connect with the server, but it is denied a session because the schedule manager is not active.</p> <p>System action</p> <p>Server operation continues, but central scheduling is not operational.</p> <p>User response</p> <p>Issue the QUERY OPTION command to determine if the option DISABLESCHEDS YES has been specified in the server options file. If so, scheduling can be enabled by updating the server options file with DISABLESCHEDS NO and restarting the server. If DISABLESCHEDS YES was not specified in the server options file, determine the source of the error by examining the QUERY ACTLOG command to view the activity log and search for messages. After the error has been resolved, restart the server to restore central scheduler operations. If the error cannot be isolated and resolved, contact your service representative.</p> <hr/> <p>ANR25 71W Scheduled session from node <i>node name</i> (platform name) has been denied, scheduled sessions are not</p>	<p>currently available.</p> <p>Explanation</p> <p>The client scheduler for node <i>node name</i> attempts to connect with the server, but is denied a session. All sessions that have been allocated for scheduled operations are already in use.</p> <p>System action</p> <p>Server operation continues.</p> <p>User response</p> <p>Issue the QUERY OPTION command to determine if the option DISABLESCHEDS YES has been specified in the server options file. If so, scheduling can be enabled by updating the server options file with DISABLESCHEDS NO and restarting the server. If DISABLESCHEDS YES was not specified in the server options file, change the total number of sessions by altering the MAXSESSIONS parameter in the server options file and then restarting the server. The percentage of sessions that are available for scheduled operations can be increased by using the SET MAXSCHEDSESSIONS command.</p> <hr/> <p>ANR25 72W Schedule prompter session to node <i>node name</i> has been denied, scheduled sessions are not currently available.</p>	<p>Explanation</p> <p>The server attempts to prompt the client scheduler for node <i>node name</i>, but all sessions that have been allocated for scheduled operations are already in use.</p> <p>System action</p> <p>The server continues to attempt contact with the client scheduler until the startup window for the scheduled event has elapsed.</p> <p>User response</p> <p>To change the total number of sessions, alter the MAXSESSIONS parameter in the server options file and then restart the server. The percentage of sessions that are available for scheduled operations can be increased by using the SET MAXSCHEDSESSIONS command.</p> <hr/> <p>ANR25 73W Sufficient memory is not available for the central scheduler - will retry in <i>number of seconds</i> seconds.</p> <p>Explanation</p> <p>The server suspends central scheduler processing because sufficient server memory is not available.</p> <p>System action</p> <p>Server operation continues; the scheduler operation will be retried after the specified delay.</p>	<p>User response</p> <p>See the documentation for the operating system about how to increase memory for an application.</p> <hr/> <p>ANR25 74W The central scheduler has insufficient recovery log space. The current transaction will be tried again in <i>number of seconds</i> seconds.</p> <p>Explanation</p> <p>If a log runs out of space, the current transaction is rolled back. The server issues an error message and halts. You cannot restart the server until the recovery log size is increased.</p> <p>System action</p> <p>The server halts.</p> <p>User response</p> <p>Monitor archive logs and active logs. If the recovery log space is insufficient, monitor the archive log space first. If the archive log space is full or nearly full, run a full database backup to remove archive logs and consider adding more disk space to the archive log directory. If the archive log space is not full and the active log space is full or nearly full, update the value of the ACTIVELOGSIZE option in the dsmserv.opt file. Set the value of the ACTIVELOGSIZE option to</p>
---	--	--	---

the new maximum size of the active log.

ANR25 75W The central scheduler has insufficient database space. The current transaction will be tried again in number of seconds seconds.

Explanation

The server suspends central scheduler processing because of insufficient database space.

System action

Server operation continues; the scheduler operation will be tried again after the specified delay.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command. Add one or more directories to the database.

ANR25 76W An attempt was made to update an event record for a scheduled operation which has already been executed for node node name.

Explanation

The server cannot update the event record for the specified client node. The existing record indicates that the scheduled operation has already completed. This can

happen when two or more client schedules are running for this node, or because the client has retried the operation after an error has occurred.

System action

Server operation continues. The existing event record is not modified. No further processing is performed for this scheduled operation.

User response

Contact the user for this client node, and make sure that only one client scheduler is running.

ANR25 77I Schedule schedule name defined.

Explanation

This message is displayed in response to the DEFINE SCHEDULE command. The schedule named schedule name in the server database.

System action

Server operation continues.

User response

None.

ANR25 78W Schedule schedule name in domain domain name for node node name has missed its scheduled start up window.

Explanation

This message is displayed when the scheduled startup window for this schedule has passed and the schedule has not begun.

System action

Server operation continues. The scheduled operation is not processed by the server.

User response

Ensure that a scheduled session for node node name has been initiated from the client to the server.

ANR25 79E Schedule schedule name in domain domain name for node node name failed (return code return code).

Explanation

The client reported a failure to complete a scheduled action, or return code -99 was reported by the server. One of the following return codes is displayed:

- 0 All operations were completed successfully.
- 4 The operation was completed, but some files were not processed.
- 8 The operation was completed with at least one warning message.

12

The operation was completed with at least one error message. The count of error messages does not include notifications about skipped files.

-99

The operation failed because the session between the client and the server ended for an unknown reason. It is unknown whether the client can reconnect to the server to complete the scheduled event.

System action

Server operation continues.

User response

Examine the node's schedule log to determine the cause of the failure. To determine the final status of the scheduled event, issue the QUERY EVENT command.

ANR25 81W Schedule schedule name of an administrative command has missed its scheduled start up window.

Explanation

This message is displayed when the scheduled startup window for this schedule has passed and the schedule has not begun.

System action

Server operation continues. The scheduled

operation is not processed by the server.

User response

Ensure that the duration and period specified in the schedule are long enough to allow the schedule to start.

ANR25 82E Command: Specified device class cannot be used with storage pools with different reclamation types.

Explanation

Storage pools can be defined with RECLAMATIONTYPE=THRESHOLD or RECLAMATIONTYPE=SNA PLOCK. A device class can only be used with either RECLAMATIONTYPE=THRESHOLD or RECLAMATIONTYPE=SNA PLOCK storage pools. An attempt was made to define a storage pool with one type of reclamation type with a device class that is already associated with another storage pool of the other reclamation type.

System action

The command fails.

User response

Reissue the command and specify another device class that is referenced by storage pools with the same reclamation type as your new storage pool. You may need to define another device class.

ANR25 83E Command: Storage pool storage pool name is not a LAN-free storage pool.

Explanation

The command indicated specifies the name of a storage pool which is not a LAN-free pool. The command syntax requires that a LAN-free storage poolname be specified.

System action

The server does not process the command.

User response

Reissue the command with a valid LAN-free storage pool name.

ANR25 84E Command: An email address exceeds maximum characters characters.

Explanation

A REGISTER NODE or REGISTER ADMIN command has been entered that specifies a list of email addresses, and one of those addresses is too long. The maximum valid length for a single email address is shown in the command.

System action

The server does not process the command.

User response

Reissue the command with a shorter email address.

ANR25 85E Command: An email address contains invalid syntax.

Explanation

A server command has been entered that specifies an invalid email address. Email addresses must be in the format "name@domain", where the name must be between 1 and 64 characters long, and the domain must be between 1 and 255 characters long.

System action

The server does not process the command.

User response

Reissue the command with a correct email address.

ANR25 86W Setting the server name to serverName can adversely affect or stop operations that depend on communications such as for the following purposes: Operations Center administration, backup-archive client operations, library sharing with the library manager or library clients, or other server to server functions such as virtual volumes, event logging, or

enterprise configuration.

Explanation

The server name was changed using the **SET SERVERNAME** command. If the server is managed by the Operations Center, server data might not be shown, or might be incorrect. In a virtual volume configuration, renaming a source server can prevent it from accessing and managing data that is stored on the target server. Any Windows clients that are connected to a server when its name is changed must reconnect to continue accessing the server.

System action

The server prompts the user to continue.

User response

Enter 'Y' to change the server name. Enter 'N' to cancel the change. If you change the server name you must reconfigure all the affected components such as backup-archive client operations, library sharing with the library manager or library clients or other server to server operations. For example, if you rename an Operations Center spoke server, you must remove it from the Operations Center and re-add it. For a hub server, you must restart the initial configuration wizard to delete the existing server connection and create a new one.

**ANR25 IBM Storage
87W Protect
encountered a
zero verb on
backupset
volume Volume
and skipped to
the next
volume.**

Explanation

IBM Storage Protect detected the problem described in APAR PK12572 . The server options file contains SKIPONZEROVERBBACK UPSET ON. IBM Storage Protect verified there was no further data on the volume, and skipped to the next volume.

System action

Processing continues.

User response

If the backupset volume was written before IBM Storage Protect 5.2.7, or 5.3.3 was put on the system and meets the PK12572 criteria, no action is required. If not, the volume has encountered a read error, and should read again on a server without the SKIPONZEROVERBBACK UPSET ON option to get the correct error messages for problem determination.

**ANR25 Command:
88E Storage pool
"StgPool"
cannot have
CACHE set to
YES with a non
zero SHRED
attribute.**

Explanation

Storage pools can be defined or updated with a non zero SHRED attribute only if the storage pool CACHE attribute is NO. Existing storage pools with CACHE attribute of YES cannot be updated with a non zero SHRED attribute. Likewise, existing storage pools with a non zero SHRED attribute cannot be updated with CACHE = YES. Existing storage pools with CACHE set to YES cannot be updated with a non zero SHRED attribute. New storage pools cannot be define nor can existing storage pools be modified with CACHE set to YES and a non zero SHRED value.

System action

The command fails.

User response

Reissue the command and specify SHRED value of zero or CACHE = NO.

**ANR25 Backupset
89E backup set name
for node node
name (data type
data type) is in
use and cannot
be deleted.**

Explanation

The server attempted to delete the backup set, but the operation could not be completed, because the backup set was in use by another process.

System action

The server does not process the command.

User response

Reissue the command at a later time.

**ANR25 Command failed
90E - SET
DBRECOVERY
command has
not been issued.**

Explanation

Backup DB command failed because a SET DBRECOVERY command has not been issued to define the device class used for automatic DB backup.

System action

The server does not process the command.

User response

Issue the SET DBRECOVERY command to define the device class for automatic DB backup operation.

**ANR25 Directory
91I directory name
is already
defined in the
database space.**

Explanation

This directory is already in the database space .

System action

The command terminates.

User response

Issue the command again, specifying a directory that is not defined in the server database space.

**ANR25 Directory(ies)
92I directory list has
been defined in
the database
space.**

Explanation

Command 'EXTEND DBSPACE' successfully added new directory(ies) *dir list* into the server database space.

System action

User response

**ANR25 Command:
93E Storage pool
storage pool
name exists but
does not match
the storage-pool
type that the
server is
attempting to
process with the
command.**

Explanation

The storage pool specified does not match the type being processed with the command.

System action

The server does not process the command.

User response

Retry the command with a valid storage pool type specified.

**ANR25 LDAP user name
94I set to LDAP user
name.**

Explanation

The LDAP user distinguished name that the server uses to

authenticate with the LDAP server has been set to the value indicated with the SET LDAPUSER command.

System action

None.

User response

The SET LDAPPASSWORD command is required to provide the password that correlates to the LDAPUSER just set. This is required for communication with the LDAP server specified in the LDAPURL option.

ANR25 95I **Directory**
directory name
is already in the
list to add to
database space.

Explanation

While processing the command argument list, a duplicate path name has been encountered.

System action

The command terminates.

User response

Issue the command again, specifying a directory that is not in the argument list.

ANR25 96E **There is**
insufficient
authority to
create the
database files.

Explanation

The database manager, running under the user ID for the IBM Storage Protect instance, does

not have the authority to create files in one or more of the database directories.

System action

The server process ends.

User response

Ensure that the user ID for the IBM Storage Protect instance has write permission to all database directories. No matter which user ID is running the dsmserv process, the database files are written by the database manager. The permissions on these database directories must allow write access from the database manager user ID. Change the ownership of the database directories to the user ID for the IBM Storage Protect instance.

ANR25 97W **Node** *node name*
in domain
domain name
began schedule
schedule name
at actual start
and is schedule
state. The
period expired
at expiration
time.

Explanation

This message is displayed when a node started a schedule, the period for the schedule expired, and the node has not reported results for the schedule. Possible causes are:

- processing for the action is taking longer than the schedule period

- a problem occurred while the node was performing the scheduled action
- the node completed the scheduled action but did not report the results to the server

System action

Server operation continues. The results of the scheduled operation are unknown.

User response

Administrators should consult the server activity log and the client scheduler log, then take corrective action if needed.

ANR25 98W **Administrative**
command
schedule
schedule name
started
processing at
actual start and
is schedule
state. The
period expired
at expiration
time.

Explanation

This message is displayed when an administrative command schedule has started, the period for the schedule expired, and the results for the schedule have not been reported. Possible causes are:

- processing for the action is taking longer than the scheduled period
- a problem occurred while performing the scheduled action

- a problem occurred reporting the schedule results

System action

Server operation continues. The results of the scheduled operation are unknown.

User response

Administrators should consult the server activity log, then take corrective action if needed.

ANR25 99W **The central**
scheduler is
unable to obtain
a required lock
and will retry in
number of
seconds
seconds.

Explanation

The server temporarily suspends central scheduler processing because a required lock is not available.

System action

Server operation continues; the scheduler operation will be retried after the specified delay.

User response

The server workload is high. If this condition persists, you may need to consider adjusting the server workload.

ANR26 00E **Command:**
Invalid schedule
name - schedule
name.

Explanation

The specified command has been issued with an invalid schedule name.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid schedule name.

ANR26 Command:
01E **Schedule description exceeds maximum length characters.**

Explanation

The specified command has been issued with a description that exceeds the maximum length.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid description.

ANR26 Command:
02E **Invalid action - action.**

Explanation

The specified command has been issued with an invalid action.

System action

Server operation continues, but the

command is not processed.

User response

Issue the command and specify a valid action.

ANR26 Command:
03E **Options string exceeds maximum length characters.**

Explanation

The specified command has been issued with an options string that exceeds the maximum length.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid options string.

ANR26 Command:
04E **Objects string exceeds maximum length characters.**

Explanation

The specified command has been issued with an objects string that exceeds the maximum length.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid objects string.

ANR26 Command:
05E **Invalid priority - priority.**

Explanation

The specified command has been issued with an invalid priority.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid priority.

ANR26 Command:
06E **Invalid start date - date.**

Explanation

The specified command was issued with an invalid start date. For a schedule with ACTION=DEPLOY, the specified date might be earlier than the current system date.

System action

Server operation continues, but the command is not processed.

User response

Reissue the command and specify a valid start date. When you define a schedule with ACTION=DEPLOY, verify that the start date is not earlier than the current system date.

ANR26 Command:
07E **Invalid start time - time.**

Explanation

The specified command was issued with an invalid start time. For a schedule with ACTION=DEPLOY, the specified time might be earlier than the current system time.

System action

Server operation continues, but the command is not processed.

User response

Reissue the command and specify a valid start time. When you define a schedule with ACTION=DEPLOY, verify that the start time is not earlier than the current system time.

ANR26 Command:
08E **Invalid duration - duration.**

Explanation

The specified command has been issued with an invalid duration.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid duration.

ANR26 Command:
09E **Invalid duration units - duration units.**

Explanation

The specified command has been issued with an

invalid value for duration units.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid value for duration units.

ANR26 Command:
10E Invalid period - period.

Explanation

The specified command has been issued with an invalid period.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid period.

ANR26 Command:
11E Invalid period units - period units.

Explanation

The specified command has been issued with an invalid value for period units.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid value for period units.

ANR26 Command:
12E Invalid day of week - day of week.

Explanation

The specified command has been issued with an invalid value for day of the week.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid value for day of the week.

ANR26 Command:
13E Invalid expiration - date.

Explanation

The specified command has been issued with an invalid expiration date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid expiration date.

ANR26 Command:
14E Invalid combination of the following

parameters:
duration,
duration units,
period, period
units.

Explanation

The specified command has been issued with an invalid combination of the DURATION, DURUNITS, PERIOD, and PERUNITS parameters. This message may be displayed if the duration of the startup window for the schedule is not shorter than the period between windows. This message may also be displayed if DURUNITS=INDefinite is specified, but PERUNITS=Onetime is not specified.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid combination of parameters.

ANR26 Command:
15E Expiration date date has elapsed.

Explanation

The specified command has been issued with an elapsed expiration date date.

System action

Server operation continues, but the

command is not processed.

User response

Issue the command and specify an expiration date that has not already elapsed.

ANR26 Command: Start
16E date start date must be earlier than expiration date expiration.

Explanation

The specified command has been issued with a start date that is not earlier than the expiration date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a schedule start date that is earlier than the expiration date.

ANR26 Command:
17E Schedule schedule name is not defined in policy domain domain name.

Explanation

The specified command has been issued with a schedule name that has not been defined in the indicated policy domain.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a schedule that has already been defined for this domain.

ANR26 Command:
18E Schedule
schedule name
is already
defined in policy
domain *domain*
name.

Explanation

The specified command has been issued with a schedule name that has already been defined for the indicated policy domain.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a schedule that has not already been defined for this domain.

ANR26 Command:
19E Currently
defined period
***period* is invalid**
with updated
period units.

Explanation

The specified command has been issued with a value for period units that is not allowed with the existing period.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a new period.

ANR26 Command:
20E Currently
defined
duration
***duration* is**
invalid with
updated
duration units.

Explanation

The specified command has been issued with a value for duration units that is not allowed with the existing duration.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a new duration.

ANR26 Command: No
21E matching
schedules.

Explanation

The specified command has been issued but no matching schedules have been found.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify different schedules.

ANR26 Command: No
22E new node
associations
added.

Explanation

The specified command has been issued but no new node associations are defined.

System action

Server operation continues, but the command has no effect.

User response

Issue the command and specify different nodes.

ANR26 Command: No
23E node
associations
deleted.

Explanation

The specified command has been issued but no node associations are deleted.

System action

Server operation continues, but the command has no effect.

User response

Issue the command and specify different nodes.

ANR26 Command: No
24E matching nodes
registered.

Explanation

No matching nodes are found for the specified command.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify different nodes.

ANR26 Command: No
25E matching nodes
registered in
policy domain
domain name.

Explanation

The specified command has been issued, but no matching nodes are registered in the indicated policy domain.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify different nodes.

ANR26 Command:
26E Invalid value for
replace -
replace.

Explanation

The specified command has been issued with an invalid value for replace.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a valid value for replace.

ANR26 Command:
27E Invalid value for format - format.

Explanation

The specified command has been issued with an invalid value for format.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a valid value for format.

ANR26 Command:
28E Invalid date - date.

Explanation

The specified command has been issued with an invalid date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid date.

ANR26 Command:
29E Invalid time - time.

Explanation

The specified command has been issued with an invalid time.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid time.

ANR26 Command:
30E Event deletion is already in process.

Explanation

The specified command has been issued while event deletion is already in progress.

System action

Server operation continues, but the command is not processed.

User response

Wait for event deletion to complete before issuing the command.

ANR26 Command:
31E Invalid begin date - date.

Explanation

The specified command has been issued with an invalid begin date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid begin date.

ANR26 Command:
32E Invalid begin time - date.

Explanation

The specified command has been issued with an invalid begin time.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid begin time.

ANR26 Command:
33E Invalid end date - date.

Explanation

The specified command has been issued with an invalid end date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid end date.

ANR26 Command:
34E Invalid end time - time.

Explanation

The specified command has been issued with an invalid end time.

System action

Server operation continues, but the

command is not processed.

User response

Issue the command with a valid end time.

ANR26 Command:
35E Invalid time range - Begin: begin End: end.

Explanation

The specified command has been issued with an invalid time range. This occurs if the date and time for the beginning of the time range (*begin*) do not precede the date and time for the end of the time range (*end*).

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid time range.

ANR26 Command:
36E Invalid value for exceptions only - exceptions only.

Explanation

The specified command has been issued with an invalid value for exceptions only.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value for exceptions only.

ANR26 37E There is insufficient authority to create the recovery log files.

Explanation

The database manager, running under the user ID for the IBM Storage Protect instance, does not have the authority to create files in one or more of the log directories.

System action

The server process ends.

User response

Ensure that the user ID for the IBM Storage Protect instance has write permission to all active, mirror, archive, and failover archive log directories. No matter which user ID is running the dsmserv process, the recovery log files are written by the database manager. The permissions on these log directories must allow write access from the database manager user ID. Change the ownership of the recovery log directories to the user ID for the IBM Storage Protect instance.

ANR26 38W This command will delete all user data and log files, as well as any backup/restore history for the IBM Storage Protect

server database. Are you sure you want your database and all of its references removed (y or n)?

Explanation

A REMOVEDB command has been entered.

System action

The administrator is asked whether to continue.

User response

Enter 'y' to remove the database or 'n' to leave the server database.

ANR26 39E Command failed - no files have been defined for storing sequential volume history information.

Explanation

Sequential volume history information is required to restore the server data base. Because no files were configured for receiving this information, the operation fails.

System action

Server operation continues.

User response

To have the server automatically record sequential volume history information to assist in server recovery, use the VOLUMEHISTORY option in the server options file

to specify where history information should be written. If you update the options file, restart the server.

ANR26 40E Command: Invalid percentage of sessions for scheduled processing - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 41E Command: Invalid event record retention period - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 42E Command: Invalid percentage for

randomization - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 43E Command: Invalid schedule query period - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 44E Command: Invalid maximum number of command retries - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 Command:
45E Invalid retry period - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 Command:
46E Invalid scheduling mode - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR26 Command:
47E Invalid type - type.

Explanation

The specified command has been issued with an invalid type.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid type.

ANR26 Command: Type
48E string exceeds maximum length characters.

Explanation

The specified command has been issued with a type string that exceeds the maximum length.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid type string.

ANR26 Command:
49E Schedule schedule name is not defined.

Explanation

The specified command has been issued with a schedule name that has not been defined.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a schedule that has already been defined.

ANR26 Command:
50E Schedule schedule name is already defined.

Explanation

The specified command has been issued with a schedule name that has already been defined.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a schedule name that has not already been defined.

ANR26 Command:
51E Invalid combination of one or more of the following parameters: cmd, type, action, objects, options.

Explanation

The specified command has been issued with an invalid combination of the CMD, ACTION, OBJECTS, and OPTIONS parameters. This message is displayed when the CMD

parameter is specified and TYPE=CLIENT is not specified, or when TYPE=ADMIN is specified, and one or more of the following is specified: ACTION, OBJECTS, or OPTIONS.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid combination of parameters.

ANR26 Command:
52E Invalid combination of one or more of the following parameters: active, cmd, type.

Explanation

The specified command has been issued with an invalid combination of the TYPE, CMD, or ACTIVE parameters. This message is displayed when TYPE=CLIENT is specified and one or more of the following is specified: ACTIVE, CMD.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid combination of parameters.

ANR26 Command: Node
53W node name

cannot be processed because it is not registered, is decommissioned or does not belong to the specified domain.

Explanation

This command cannot be processed for the indicated node. The specified node must be registered to the server, and assigned to the required domain. The node cannot be decommissioned.

System action

The indicated node is not processed, but other nodes may be processed if specified by this command.

User response

If the node name was entered incorrectly, reissue the command with the correct node name.

ANR26 Command: The 54E NODES parameter cannot be used when querying administrative schedules.

Explanation

A QUERY SCHEDULE command has been issued with TYPE=ADMINISTRATIVE and the NODES parameter both specified. The NODES parameter cannot be specified when querying administrative schedules.

System action

Server operation continues, but the command is not processed.

User response

Issue the command without the NODES parameter.

ANR26 Command: 55E Invalid client action schedule duration - days.

Explanation

The specified command has been issued with an invalid number of days. Valid values are 1 to 9999 inclusive. *days* specifies the length of time during which a schedule defined by the DEFINE CLIENTAction command must be executed by an associated node. After that, the schedule will be deleted from the database.

System action

Server operation continues, but the command is not processed.

User response

Reissue the command with a valid number of days.

ANR26 Command: 56E Invalid schedule style schedStyle.

Explanation

The specified command has been issued with an invalid schedule style.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid schedule style.

ANR26 Command: 57E Invalid month month.

Explanation

The specified command has been issued with an invalid month.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid month.

ANR26 Command: 58E Invalid day of month month.

Explanation

The specified command has been issued with an invalid day of month.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid day of month.

ANR26 Command: 59E Invalid week of month month.

Explanation

The specified command has been issued with an invalid week of month.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid week of month.

ANR26 Command: 60E Invalid combination of enhanced schedule parameters or their values: parm1 and parm2.

Explanation

The specified command has been issued with an invalid combination of the DAYOFMONTH, WEEKOFMONTH, and DAYOFWEEK parameters. WEEKOFMONTH and DAYOFWEEK cannot be specified with DAYOFMONTH. WEEKEND or WEEKDAY must be specified with the FIRST or LAST week of month.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid combination of parameters.

ANR26 Command:
61E Invalid combination of enhanced schedule parameters or their values, parm1 and parm2, found for schedule name.

Explanation

The specified update command has been issued with either an invalid combination of parameters or their values, or a specified parameter or value is not compatible with an option that is not being updated for the existing schedule. WEEKOFMONTH and DAYOFWEEK must not be specified with DAYOFMONTH. WEEKEND or WEEKDAY must be specified with the FIRST or LAST week of month.

System action

Server operation continues, but the command is not processed.

User response

To see the options for the existing schedule, issue: QUERY SCHEDULE FORMAT=DETAILED for the client or administrative schedule. Determine if the error was caused by one of the following:

- a conflict between parameters to the update command.
- a conflict between a parameter specified with the update command and a value that already exists for the schedule.

For the latter problem, also update the existing option that is causing the problem. Correct the update command and issue it again.

ANR26 (*) "Query schedule format=standard" displays an asterisk in the day of week column for enhanced schedules. The period column is blank. Issue "query schedule format=detailed" to display complete information about an enhanced schedule.

Explanation

This message explains the standard display for an enhanced schedule.

System action

Server operation continues.

User response

Issue "query schedule format=detailed" to display information about an enhanced schedule.

ANR26 Command:
63I resetting existing options for

schedule name to default values.

Explanation

The update schedule command has reset existing options for the schedule to default values. The change is required by the parameters specified with the update or audit commands.

System action

Server operation continues.

User response

None.

ANR26 Command:
64E Invalid parameter parm for schedule style schedule style.

Explanation

A specified parameter is not valid for the schedule style.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and with parameters valid for the schedule style.

ANR26 Command:
65W Invalid month and day, month day, detected and are skipped.

Explanation

The specified command has an invalid combination of MONTH and DAYOFMONTH. If one month and one day are specified in the command and that combination is invalid, the command fails. If there is at least one valid month and day combination, the schedule is defined and runs on the valid dates. The schedule skips the invalid month and day combinations.

System action

Server operation continues.

User response

Determine the correct day and month combinations. You might specify the DAYOFMONTH value as a negative value. For example, to specify the last day of the month minus 3 days, specify dayofmonth=-3. If the command fails, issue the define command again. If the schedule is defined, use the update command to change the month and day values.

ANR26 Command:
66W Invalid month and day, month day, detected for schedule name.

Explanation

The specified update command has been issued with either an invalid combination of MONTH and DAYOFMONTH, or a specified MONTH or

DAYOFMONTH value is incompatible with a MONTH or DAYOFMONTH value that is not being updated for the existing schedule. If there is just one month and one day combination and that combination is invalid, the command will fail. If there is at least one valid month and day combination, the schedule will be updated and run on the valid dates. The schedule will skip the invalid month and day combinations.

System action

Server operation continues.

User response

To see the options for the existing schedule, issue "q sched f=d" for the client or administrative schedule. Determine the correct day and month combinations. If the command failed, issue the update command again.

ANR26 67W Audit volume process has skipped volume volume name due to an error.

Explanation

During processing of an AUDIT VOLUME command for the volume shown, an unrecoverable error occurred on the volume.

System action

The AUDIT VOLUME command has skipped the volume shown.

User response

Examine messages that were previously issued that explain the cause of the failure and correct the error if possible. Once the error has been corrected, reissue the command.

ANR26 68I The deduplication-verification level is set to percent.

Explanation

This message is displayed when the server command SET DEDUPVERIFICATIONLEVEL is issued. Setting the deduplication-verification level helps ensure that the client is not making a security attack against the server.

System action

Server operation continues.

User response

None.

ANR26 69E The specified deduplication-verification level is invalid.

System action

Server operation continues.

User response

Specify a value 0 - 100 for this command.

ANR26 70E Export command: Invalid value for SCHEDSTYLE parameter detected while

exporting schedule schedule name in domain domain name - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the SCHEDSTYLE parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data contains an unknown SCHEDSTYLE value for this schedule. If this data is imported, the default or existing SCHEDSTYLE value is used.

User response

Update the SCHEDSTYLE value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the SCHEDSTYLE value after import processing has been performed.

ANR26 71E Export command: Invalid value for SCHEDSTYLE parameter detected while exporting administrative schedule schedule name - default or existing value is

used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the SCHEDSTYLE parameter for administrative schedule *schedule name*.

System action

Export processing continues, but the exported data contains an unknown SCHEDSTYLE value for this schedule. If this data is imported, the server uses the default or existing SCHEDSTYLE value.

User response

Update the SCHEDSTYLE value for this schedule and restart the export command. Alternatively, the export data with the unknown value can be used, and the SCHEDSTYLE value can be checked and updated after import processing has been performed.

ANR26 72E Import command: Invalid value for SCHEDSTYLE parameter in exported data for schedule schedule name in domain domain name.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the

SCHEDSTYLE parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing SCHEDSTYLE value is used.

User response

If the data is imported with a later command, verify that the correct SCHEDSTYLE value is used for this schedule.

ANR26 Import 73E command:
Invalid value for SCHEDSTYLE parameter in exported data - schedule *schedule name* in domain *domain name* defined with default SCHEDSTYLE value.

Explanation

During processing of command *import command*, an invalid value is encountered for the SCHEDSTYLE parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the default SCHEDSTYLE value for this schedule.

User response

Verify that the correct SCHEDSTYLE value has been used for this schedule. Update this value, if necessary.

ANR26 Import 74E command:
Invalid value for SCHEDSTYLE parameter in exported data - existing SCHEDSTYLE value for schedule *schedule name* in domain *domain name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the SCHEDSTYLE parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the existing SCHEDSTYLE value for this schedule.

User response

Verify that the correct SCHEDSTYLE value has been used for this schedule. Update this value, if necessary.

ANR26 Import 75E command:
Invalid value for SCHEDSTYLE parameter in exported data for administrative

schedule *schedule name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the SCHEDSTYLE parameter for administrative schedule *schedule name*.

System action

Processing of the command continues. If a later command is issued that causes the data to be imported, the default or existing SCHEDSTYLE value is used.

User response

If the data is imported with a later command, verify that the correct SCHEDSTYLE value is used for this schedule.

ANR26 Import 76E command:
Invalid value for SCHEDSTYLE parameter in exported data - administrative schedule *schedule name* defined with default SCHEDSTYLE value.

Explanation

During processing of command *import command*, an invalid value is encountered for the SCHEDSTYLE parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the default SCHEDSTYLE value for this schedule.

User response

Verify that the correct SCHEDSTYLE value has been used for this schedule. Update this value, if necessary.

ANR26 Import 77E command:
Invalid value for SCHEDSTYLE parameter in exported data - existing SCHEDSTYLE value for administrative schedule *schedule name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the SCHEDSTYLE parameter for administrative schedule *schedule name*.

System action

Processing of the command continues, by using the existing SCHEDSTYLE value for this schedule.

User response

Verify that the correct SCHEDSTYLE value has been used for this schedule. Update this value, if necessary.

**ANR26 Server database
78E format failed.****Explanation**

A failure occurred during the format of the IBM Storage Protect server database. This occurred during the processing of a 'DSMSERV FORMAT' command.

System action

Server format processing terminates.

User response

Review error messages to determine the cause of the failure and retry the 'DSMSERV FORMAT' once the issue has been resolved.

**ANR26 Command: All of
79E the nodes
provided are
invalid.****Explanation**

While verifying the parameters of the specified command, no valid node was found.

System action

The server ends the command.

User response

Verify that the nodes specified are correct and all are registered. Then, reissue the command.

**ANR26 Command: You
80E cannot specify
TOC=YES when
TYPE is
SNAPMIRROR.****Explanation**

A SnapMirror backup was attempted while specifying TOC=YES. Network Appliance SnapMirror backups do not support TOC creation.

System action

The server ends the command.

User response

Reissue the command without specifying TOC=YES.

**ANR26 Command: The
81E file server
movername
does not
support
SnapMirror-to-
Tape operations
or is not running
NDMP Version
4.****Explanation**

A SnapMirror backup was specified with a NAS device that does not Network Appliance SnapMirror backup operations.

System action

The server ends the command.

User response

Reissue the command by specifying a standard NDMP full or differential backup. .

**ANR26 Command: You
82E cannot specify
MODE=DIFF
when TYPE is
SNAPMIRROR.****Explanation**

A SnapMirror backup was attempted while specifying MODE=DIFF. Network Appliance SnapMirror backups may only be full image backups.

System action

The server ends the command.

User response

Reissue the command and do not specify MODE=DIFF with TYPE=SNAPMIRROR.

**ANR26 Command: A
83I Table of
Contents will
not be created
for a SnapMirror
backup.****Explanation**

A Netapp SnapMirror backup was requested and the TOC parameter is set to PREFERRED. The backup will continue, however no Table of Contents will be created.

System action

The server operation continues.

User response

None.

**ANR26 Command:
84E SnapMirror
operations are
not supported
on NAS virtual
filesystem
definitions.****Explanation**

A SnapMirror backup or restore was attempted on a NAS virtual filesystem. Network Appliance SnapMirror backups do not support directory level backup, therefore a virtual filesystem may not be used with TYPE=SNAPMIRROR.

System action

The server ends the command.

User response

Reissue the command by specifying TYPE=DUMPIMAGE.

**ANR26 SnapMirror
85I backup of NAS
node nodename,
file system file
system, started
as process
process ID by
administrator
administrator.****Explanation**

A SnapMirror backup is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown.

System action

The indicated process is started.

User response

None.

**ANR26 SnapMirror
86I Restore of NAS
node nodename,
file system
filesystem,
started as
process process**

ID by administrator administrator. A full image for this file system will be restored to destination destination.

Explanation

A SnapMirror restore is started for the indicated file system of a NAS node. The operation is initiated by the administrator shown. The restore will be performed using a full image of this file system. The file system will be restored to the indicated destination.

System action

The indicated process is started.

User response

None.

ANR26 87E Command: You cannot specify a FILELIST when TYPE is SNAPMIRROR.

Explanation

A file level restore was attempted from a SnapMirror backup. Network Appliance SnapMirror backups do not support file level restore.

System action

The server ends the command.

User response

Reissue the command without the FILELIST parameter.

ANR26 88E Command: The SnapMirror Restore of NAS node *nodename*, file system *file system*, cannot be started. The destination file system *destination* is not set to "Restricted" on the NAS device.

Explanation

While verifying the parameters of the specified command, no valid node was found.

System action

The server ends the command.

User response

Verify that the nodes specified are correct and all are registered. Then, reissue the command.

ANR26 89W Command: The dataformat of the datamover *data mover* is incompatible with the NAS device with host identifier *hostId*.

Explanation

The dataformat provided in the command is not compatible with the NAS device which is associated with the high level address. was found.

System action

The server completes the command.

User response

Determine the proper dataformat for your NAS device and reissue the command.

ANR26 90E Command: The file system *file system* is in restricted state and cannot be used in an NDMP backup or restore operation.

Explanation

A NAS file system that is in the restricted state was specified for an NDMP backup or restore operation. You cannot perform an NDMP backup or restore of a file system in the restricted state.

System action

The server ends the command.

User response

Refer to your NAS device's documentation on how to unrestrict the file system. Then, reissue the command.

ANR26 91E Command: The file server *file server name*, does not support the NDMP Cluster Aware Backup extension and the datamover type requires it.

Explanation

A datamover of type NASCLUSTER or NASVSERVER was defined however, the file server does not support

the NDMP Cluster Aware Backup extension.

System action

The IBM Storage Protect server define operation on the file server fails.

User response

Verify that the file server is running clustered Data OnTap from Netapp.

ANR26 92E Command: Invalid subaction - action.

Explanation

The specified command has been issued with an invalid subaction.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid subaction.

ANR26 93E Command: Invalid action and subaction combination.

Explanation

The specified command has been issued with an invalid combination of action and subaction values.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid subaction.

ANR26 Command: 94E Action must be specified with subaction.

Explanation

The specified command has been issued with a subaction and no action value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command and specify a valid subaction.

ANR26 The 95E deduplication mode for node *node name* was set to **SERVERONLY**.

Explanation

The server detected a potential security attack and disabled client-side deduplication.

System action

Server and client operations continue.

User response

Verify that the client workstation does not have any applications that are attempting a security attack on the server. If the client is secure, re-enable client-side deduplication on the node by issuing the server

command **UPDATE NODE** with the **DEDUPLICATION=CLIENT ORSERVER** parameter.

ANR26 Export 96E command: Invalid value for **SUBACTION** parameter detected while exporting schedule *schedule name* in domain *domain name* - default or existing value is used during import.

Explanation

During processing of command *export command*, an invalid value is encountered for the **ACTION** parameter for schedule *schedule name* in domain *domain name*.

System action

Export processing continues, but the exported data will contain an unknown **SUBACTION** value for this schedule. If this data is imported, the default or existing **SUBACTION** value is used.

User response

Update the **SUBACTION** value for this schedule and restart the export command. Alternatively, use the export data with the unknown value, and check and update the **SUBACTION** value after import processing has been performed.

ANR26 Import 97E command: Invalid value for **SUBACTION** parameter in exported data - schedule *schedule name* in domain *domain name* defined with default **SUBACTION** value.

Explanation

During processing of command *import command*, an invalid value is encountered for the **SUBACTION** parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the default **SUBACTION** value for this schedule.

User response

Verify that the correct **SUBACTION** value has been used for this schedule. Update this value, if necessary.

ANR26 Import 98E command: Invalid value for **SUBACTION** parameter in exported data - existing **SUBACTION** value for schedule *schedule name* in domain *domain name* was not updated.

Explanation

During processing of command *import command*, an invalid value is encountered for the **SUBACTION** parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues, by using the existing **SUBACTION** value for this schedule.

User response

Verify that the correct **SUBACTION** value has been used for this schedule. Update this value, if necessary.

ANR26 Import 99E command: Invalid value for **SUBACTION** parameter in exported data for schedule *schedule name* in domain *domain name*.

Explanation

During preview processing of command *import command*, an invalid value is encountered for the **SUBACTION** parameter for schedule *schedule name* in policy domain *domain name*.

System action

Processing of the command continues. If a later command causes the data to be imported, the default or existing

SUBACTION value is used.

User response

If the data is imported with a later command, verify that the correct SUBACTION value is used for this schedule.

ANR27 00E Schedule manager aborted.

Explanation

The schedule manager has ended because of an error condition and is not able to maintain entries for scheduled operations.

System action

Server operation continues, but the central scheduler is not operational.

User response

To determine the source of the error, examine server messages issued prior to this message. Issue the QUERY ACTLOG command to view the activity log and search for messages. After the error has been resolved, restart the server to restore central scheduler operations. If the error cannot be isolated and resolved, contact your service representative.

ANR27 01E The schedule manager could not be started: diagcode.

Explanation

The schedule manager cannot be started during initialization because sufficient memory is not

available. Diagnostic code *diagcode* is issued.

System action

Initialization fails.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR27 02E The schedule prompter could not be started: diagcode.

Explanation

The schedule prompter cannot be started during initialization because sufficient memory is not available. Diagnostic code *diagcode* is issued.

System action

Initialization fails.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR27 03E Schedule prompter aborted.

Explanation

The schedule prompter ends because of a processing error.

System action

Server operation continues, but prompted scheduling is not operational.

User response

To determine the source of the error, examine server messages issued prior to this message. Issue the QUERY ACTLOG command to view the activity log and search for messages. After the error has been resolved, restart the server to restore central scheduler prompting operations. If the error cannot be isolated and resolved, contact your service representative.

ANR27 07E Out of server log space in central scheduler.

Explanation

The server ends a database update transaction for the central scheduler because sufficient log space is not available on the server.

System action

Server operation continues, but the database update fails.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might

occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR27 08E Out of server database space in central scheduler.

Explanation

The server ends a database update transaction for the central scheduler because sufficient database space is not available on the server.

System action

Server operation continues, but the database update fails.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR27 09E Schedule manager : Unable to start event record deletion.

Explanation

Event record deletion cannot be started because sufficient memory is not available.

System action

Server operation continues, but event records are not automatically deleted after their retention period has elapsed.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR27 Node node1 12E requested scheduling information for node node2 - session rejected.

Explanation

A request for pending scheduled operations has been sent from the client scheduler for node node1. However, the request is for scheduling information concerning another node node2.

System action

Server operation continues, but the client scheduler for node node1 will not be able to process pending operations.

User response

Try restarting the client scheduler for node node1. If the problem persists, contact your

service representative to resolve the client program error.

ANR27 Node node1 13E trying to start scheduled operation for node node2 - session rejected.

Explanation

The client scheduler for node node1 has attempted to execute a scheduled operation for another node, node2.

System action

Server operation continues, but the scheduled operation is not processed.

User response

Try restarting the client scheduler for node node1. If the problem persists, contact your service representative to resolve client program error.

ANR27 Node node1 14E trying to report scheduled operation results for node node2 - session rejected.

Explanation

The client scheduler for node node1 has attempted to report the results of a scheduled operation using another node name, node2.

System action

Server operation continues, but the results that were sent from node

node1 are not be stored in the server's database.

User response

Try restarting the client scheduler for node node1. If the problem persists, contact your service representative to resolve the client program error.

ANR27 Client node 15E node id unable to register valid address for server prompting: type address type (high address low address).

Explanation

The client scheduler for node node id has attempted to register an invalid address for server-prompted central scheduling. The address was type address type with high-level field high address and low-level field low address. The only valid address type is 1.

System action

Server operation continues, but the node node id will not be prompted to perform scheduled operations.

User response

Verify that the address type and address are correct for this client. The only valid address type is 1 (for TCP/IP). Make sure the client scheduler is not using an invalid address obtained from the client's options file or from the command line

when the client scheduler was started.

ANR27 Schedule 16E prompter was not able to contact client node name using type address type (high address low address).

Explanation

The server has attempted to prompt the client scheduler for node node name because a scheduled operation should be started. The server is unable to contact the client by using address type address type, with high-level field high address and low-level field low address.

System action

Server operation continues, but node node name is not prompted to start the scheduled operation. If operations should be started for other nodes, the server will attempt to prompt the client schedulers for these nodes. This error is usually caused by network outages or the client scheduler program not being run on the client node.

User response

Verify that the address type and address are correct for this client. The only valid address type is 1 (for TCP/IP). Make sure that the client scheduler is not using an invalid address, obtained at the time the client scheduler

was started, from either the client's options file or from the command line. Verify that the client scheduler for node *node name* is running and that the necessary communication links to that scheduler are operational. Firewalls must allow traffic from the server to the client and from the client to the server without the session timing out. Ensure that the DNS configuration is correct.

**ANR27 Schedule
17E prompter
cannot contact
client node
name using
address type
(address type).**

Explanation

The server attempts to prompt the client scheduler for node *node name* because scheduled work should be started. However, either the server does not support address type *address type* needed for server-prompted scheduling, or the communication method is not currently available. The only valid address type is 1 (for TCP/IP).

System action

Server operation continues, but the server does not prompt node *node name*.

User response

If the server does not support the *address type* specified, clients may only use the polling mode of scheduling.

If the communication method is temporarily not available, prompted mode scheduling will resume after the communication problem is fixed and service restored. If the problem persists, contact your service representative.

**ANR27 Schedule
18W manager
disabled.**

Explanation

The schedule manager has been disabled because the DISABLESCHEDS YES option was specified in the server options file.

System action

Server operation continues, but the central scheduler is not operational.

User response

To enable the schedule manager, specify DISABLESCHEDS NO in the server options file and restart the server.

**ANR27 Command:
19E Invalid
parameter parm
for
ACTION=DEPLOY.**

Explanation

A parameter that is specified is not valid for ACTION=DEPLOY.

System action

Server operations will continue, but the command is not processed.

User response

Reissue the command with valid ACTION=DEPLOY parameters.

**ANR27 Command: Node
20E node name is
currently being
replicated.**

Explanation

The command shown specifies a node that is currently being replicated to another server.

System action

The server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current replication and reissue the command.

**ANR27 A non-
21E replication SSL
session to
address address
is requested.**

Explanation

A non-replication SSL session to the indicated address was attempted. Server-to-server SSL sessions are supported for replication only.

System action

The server does not start the session.

User response

If you want to configure the same target server for both SSL and non-SSL communications, you can configure multiple

server definitions when you issue the DEFINE SERVER command. You can have multiple server definitions with the same target address if the server names are not the same.

**ANR27 The server now
22I accepts
sessions that
originate from
server server
name**

Explanation

The server can now accept sessions from the named server.

System action

None.

User response

None.

**ANR27 The server is
23I enabled to have
outbound
sessions to
server server
name**

Explanation

The server now allows sessions targeted to the named server.

System action

None.

User response

None.

**ANR27 The server does
24I not accept
sessions from
server server
name**

Explanation

The server rejects sessions from the named server.

System action

None.

User response

None.

ANR27 25I The server is disabled for sessions with server *server name*

Explanation

The server cannot initiate sessions to the named server.

System action

None.

User response

None.

ANR27 26E Command: None of the specified nodes are configured for replication or they are part of an active replication process.

Explanation

The replication command did not start because data belonging to the specified nodes was being replicated, or because the nodes are not configured for replication.

System action

The server ends the command.

User response

Verify that the specified nodes are correct and that they are configured for replication. Verify that the nodes are not part of an active replication process. A node is configured for replication if the replication state is ENABLED or DISABLED. To determine the replication state of a node, issue the QUERY NODE FORMAT=DETAILED command. To configure nodes for replication, issue the UPDATE NODE command. After the situation has been corrected, reissue the REPLICATE NODE command.

ANR27 27E Command: Node *node name* is currently accessing server *server name*.

Explanation

The command shown specifies a node that has an active session with the specified server.

System action

The local server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current session and reissue the command.

ANR27 28E Command: Node *node name* cannot be replicated because it is not in the SEND or

SYNCSEND mode.

Explanation

The replication mode of a specified node is RECEIVE or SYNCRECEIVE. To replicate, the replication mode must be SEND or SYNCSEND.

System action

The server processes the command. However the specified node is skipped for this operation.

User response

Verify that all of the nodes to be replicated are in SEND or SYNCSEND mode. Reissue the command, or, if necessary, cancel the replication process and reissue the command.

ANR27 29W This command will register the node to new domain *domainname*. Changing the domain will cause the node to be disassociated from the schedule of original domain.

Explanation

The schedule belongs to the domain. The node will be disassociated from the schedule if the node is registered to new domain.

System action

IBM Storage Protect prompts the user to continue.

User response

Enter 'Y' to change the domain. Enter 'N' if you do not want to change the domain.

ANR27 30I Default authentication set to *defaultAuth*.

Explanation

This message is displayed in response to the Set DEFAULTAUTHentication command. It indicates the current default AUTHENTICATION value for the REGISTER NODE and REGISTER ADMIN commands.

System action

None.

User response

None.

ANR27 31E An invalid command was issued: *issued command*. The command *prerequisite command* must be issued first.

Explanation

The specified server command was issued prior to another required command.

System action

The server ignores the command.

User response

Issue the required command and then reissue the command that caused the error.

ANR27 32E Unable to communicate with the external LDAP directory server.

Explanation

The server tried to communicate with the external LDAP directory server but was unable to do so.

System action

The server ignores the command.

User response

Validate that the external LDAP directory server is actively running. Also, validate that the LDAPURL option is set appropriately and refers to a valid LDAP directory server.

ANR27 33W Unable to authenticate with the external LDAP directory server to process the SET LDAPUSER command.

Explanation

The LDAPUSER value or the LDAPPASSWORD value or both are invalid.

System action

The server command continues.

User response

During the SET LDAPUSER command, the IBM Storage Protect server tried to authenticate to the external LDAP directory server. If the LDAPPASSWORD is not set or is invalid, the authentication fails, but the SET LDAPUSER command succeeds. The LDAPUSER value and the LDAPPASSWORD value both must be set correctly before the server can communicate with the external LDAP directory server. The SET LDAPPASSWORD command fails if authentication with the external LDAP directory server fails with the current LDAPUSER and new LDAPPASSWORD.

You can validate the current LDAPUSER by issuing the QUERY STATUS command. The LDAPUSER and LDAPPASSWORD commands can be corrected with the appropriate SET commands. If there is still an authentication error, validate that the user and password are set correctly in the external LDAP directory server.

ANR27 34E Unable to authenticate with the external LDAP directory server to process the SET LDAPPASSWORD command.

Explanation

The LDAPUSER value or the LDAPPASSWORD value or both are invalid.

System action

The server command fails.

User response

You can validate the current LDAPUSER by issuing the QUERY STATUS command. The LDAPUSER and LDAPPASSWORD commands can be corrected with the appropriate SET commands. If there is still an authentication error, validate that the user and password are set correctly in the external LDAP directory server.

ANR27 35W Renamed node node name must be updated with the current password.

Explanation

In response to a RENAME NODE command to a node that uses LDAP authentication, the node was renamed in the IBM Storage Protect database, but an LDAP entry does not exist for the new name in the LDAP directory server. This can happen because the SYNCLDAPDELETE=NO parameter was used or an LDAP entry did not exist for the original name.

System action

None.

User response

Issue the UPDATE NODE command to the renamed node using the current password, before attempting any sessions with the node.

ANR27 36W Renamed administrator admin name must be updated with the current password.

Explanation

In response to a RENAME ADMIN command with an admin that uses LDAP authentication, the admin was renamed in the IBM Storage Protect database, but an LDAP entry does not exist for the new name in the LDAP directory server. This can happen because the SYNCLDAPDELETE=NO parameter was used or an LDAP entry did not exist for the original name.

System action

None.

User response

Issue the UPDATE ADMIN command to the renamed admin using the current password, before attempting any sessions with the admin.

ANR27 37E Command: All of the admins provided are invalid.

Explanation

While verifying the parameters of the specified command, no valid admin was found.

System action

The server ends the command.

User response

Verify that the admins specified are correct and all are registered. Then, reissue the command.

ANR27 Command: 38W *parameter conflicts with parameter - conflicting parameter.*

Explanation

Conflicting parameters were specified in the command.

System action

The server bypasses the conflicting parameter and processing continues.

User response

Verify which parameter you want to use and reissue the command, if necessary. If the command needs to be reversed, undo the command, correct the syntax, and then reissue the command.

ANR27 Audit LDAP 39I *directory started as process process ID.*

Explanation

A background process was started to audit the LDAP directory entries. The audit was assigned the process ID shown.

System action

The audit process starts and server operation continues.

User response

The administrator may query the status of the audit process by using the QUERY PROCESS command, or cancel the process with the CANCEL PROCESS command.

ANR27 Alert monitor 40E *Alert monitor could not start or has failed and stopped.*

Explanation

The server alert monitor is not able to start or continue processing.

System action

The alert monitor is not able to run.

User response

Evaluate other messages in the activity log to determine why the alert monitor is unable to run. This is typically caused by insufficient resources such as a lack of memory or other system resources.

ANR27 Alert monitor 41I *Alert monitor has started.*

Explanation

The server alert monitor has started successfully and will evaluate messages to determine and raise alerts for administrative notification where necessary.

System action

None.

User response

None.

ANR27 The command 42W *The command was submitted by administrator and is pending approval. Request ID:requestId.*

Explanation

The approval request is in pending state. If the request is not approved within the allotted time, the request will be deleted and the command will not be processed.

System action

Server operation continues, but the server does not process the command.

User response

To view a list of commands that are pending approval, issue the QUERY PENDINGCMD command. To run the command, ask an approval administrator to approve the request. If the request is rejected, the approval request will be deleted.

ANR27 The request to 43I *The request to process the command command issued by administrator administrator was approved.*

Request ID:requestId.

Explanation

An approval administrator approved the request to process the specified command. The command was issued and is no longer pending approval.

System action

The server processes the command.

User response

To verify that command processing completed, review messages in the activity log by issuing the QUERY ACTLOG command.

ANR27 Administrator 44I *Administrator changed a command approval configuration setting by issuing the command command.*

Explanation

The specified command was issued, resulting in a change to the configuration settings for command approval. This alert message is generated when the following commands are issued:

SET
COMMANDAPPROVAL,
SET
APPROVERSREQUIREAPPROVAL, REGISTER
ADMIN CMDAPPROVER,
and UPDATE ADMIN
CMDAPPROVER.

System action

System operation continues.

User response

No action is required.

ANR27 AUDIT 45I LDAPDIRECTOR Y command finished: admin only LDAP administrator entries are only in the LDAP directory server (not in the IBM Storage Protect server), number administrator entries are only in the IBM Storage Protect server (not in the LDAP directory server), node only LDAP node entries are only in the LDAP directory server (not in the IBM Storage Protect server), number node entries are only in the IBM Storage Protect server (not in the LDAP directory server), and total deleted entries were deleted from the LDAP server in total.

Explanation

The inconsistencies between the LDAP directory server and the IBM Storage Protect server are displayed as a result of the

AUDIT LDAPDIRECTORY command.

System action

None.

User response

None.

ANR27 Node node name 46W was located in the database but not in the LDAP directory server.

Explanation

An inconsistency between the LDAP directory server and the IBM Storage Protect database was discovered. A node in the IBM Storage Protect database a does not have a corresponding entry in the LDAP directory server. Without an entry in the LDAP directory server, the node is inaccessible until action is taken. See the user response for recommended action.

System action

None.

User response

To make the node accessible, you need to add the node to the LDAP directory server. Issue the UPDATE NODE command with a password to create an LDAP node entry in the LDAP directory server.

ANR27 Administrator 47W admin name was located in the database but not in the LDAP directory server.

Explanation

An inconsistency between the LDAP directory server and the IBM Storage Protect database was discovered. An administrator in the IBM Storage Protect database a does not have a corresponding entry in the LDAP directory server. Without an entry in the LDAP directory server, the administrator is inaccessible until action is taken. See the user response for recommended action.

System action

None.

User response

To make the administrator accessible, you need to add the administrator to the LDAP directory server. Issue the UPDATE ADMIN command with a password to create an LDAP administrator entry in the LDAP directory server.

ANR27 Node node name 48W was located in the LDAP directory server but not in the database.

Explanation

An inconsistency between the LDAP directory server and the IBM Storage Protect database was discovered. An unexpected node entry was found in the LDAP directory server. An extra entry in the LDAP directory server does not affect IBM

Storage Protect server operations. If the LDAP directory server is shared by multiple IBM Storage Protect servers, the extra entry might be needed for one or more of the other IBM Storage Protect servers.

System action

If the AUDIT LDAPDIRECTORY command is issued with FIX=YES, the server deletes the node entry from the LDAP directory server. If the command is issued with FIX=NO, the server does not delete the entry.

User response

None.

ANR27 Administrator 49W admin name was located in the LDAP directory server but not in the database.

Explanation

An inconsistency between the LDAP directory server and the IBM Storage Protect database was discovered. An unexpected administrator entry was found in the LDAP directory server. An extra entry in the LDAP directory server does not affect IBM Storage Protect server operations. If the LDAP directory server is shared by multiple IBM Storage Protect servers, the extra entry might be needed for one or more of the other IBM Storage Protect servers.

System action

If the AUDIT LDAPDIRECTORY command is issued with FIX=YES, the server deletes the administrator entry from the LDAP directory server. If the command is issued with FIX=NO, the server does not delete the entry.

User response

None.

ANR27 50I Starting scheduled command *schedule name* (*scheduled command*).

Explanation

This message is displayed when the server starts the execution of a scheduled command. The name of the schedule and the actual command scheduled is displayed.

System action

Server operation continues, the scheduled command is processed.

User response

None.

ANR27 51I Scheduled command *schedule name* completed successfully.

Explanation

This message is displayed when the server successfully completes processing of a scheduled command.

System action

Server operation continues.

User response

None.

ANR27 52E Scheduled command *schedule name* failed.

Explanation

This message is displayed when the server encounters a failure in processing a scheduled command.

System action

Server operation continues. The scheduled command is ended.

User response

Examine messages issued prior to this message and use the UPDATE SCHEDULE command to correct the scheduled command. The QUERY EVENT command may also be used to determine the cause of the failure for this scheduled command.

ANR27 53I (*Schedule name*):*command response*

Explanation

This message is used to display the server response to a scheduled command. The name of the command schedule is included at the beginning of the message in parentheses. A number displayed instead of a command schedule

name indicates an activity scheduled by the server.

System action

Server operation continues. The scheduled command is ended.

User response

None.

ANR27 54E DEFINE SCHEDULE or UPDATE SCHEDULE parameter *CMD='command'* - Unknown command.

Explanation

The specified command is not a valid server command.

System action

The DEFINE SCHEDULE or UPDATE SCHEDULE command is not processed.

User response

Reissue the correct command.

ANR27 55E DEFINE SCHEDULE or UPDATE SCHEDULE parameter *CMD='command'* - not eligible for scheduling.

Explanation

The specified command is not eligible for scheduling.

System action

The DEFINE SCHEDULE or UPDATE SCHEDULE

command is not processed.

User response

None.

ANR27 56I Scheduled command *schedule name* started successfully.

Explanation

This message is displayed when the server successfully starts processing of a background process for a scheduled command.

System action

Server operation continues.

User response

None.

ANR27 57E Command: The NODES parameter cannot be used when querying events for administrative schedules.

Explanation

A QUERY EVENT command has been issued with TYPE=ADMINISTRATIVE and the NODES parameter both specified. The NODES parameter cannot be specified when querying events for administrative schedules.

System action

Server operation continues, but the command is not processed.

User response

Issue the command without the NODES parameter.

ANR27 58E Please specify a tracefile name with less than 37 characters if it is fully qualified or 26 characters if it is not fully qualified.

Explanation

The .template file adds 9 more characters to the end of the filename.

System action

Server operation continues.

User response

Reduce the filename length to a working range for s390 system

ANR27 59I Command: The virtual file space definition *vfs name* for node *node name* has been deleted.

Explanation

In response to the DELETE VIRTUALFSMAPPING command, the virtual file space mapping *vfs name* for the node *node name* has been deleted in the server database.

System action

Server operation continues.

User response

None.

ANR27 60E Command: Unable to delete the virtual file space definition *vfs name* for node *node name*. A file space definition exists with the same name.

Explanation

The DELETE VIRTUALFSMAPPING command has been entered, but the specified virtual file space mapping *vfs name* for the node *node name* has an associated file space definition in server database.

System action

The server does not process the command.

User response

To delete the virtual file space definition, first delete the filespace definition with the same name.

ANR27 61E Command: The deployment repository directory cannot be updated at this time: Deploy Manager is active.

Explanation

The SET DEPLOYREPOSITORY command was issued while the deploy manager is active.

System action

The server does not process the command.

User response

Reissue the command at a later time. Alternatively, issue the SET DEPLOYPKGMR OFF command, and then reissue the SET DEPLOYREPOSITORY command.

ANR27 62I Command: A virtual file space mapping named *vfs name* for node *node name* has been updated.

Explanation

In response to the UPDATE VIRTUALFSMAPPING command, a virtual file space mapping for the specified node has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR27 63E Command: The hexadecimal string entered for the path parameter is not valid.

Explanation

The command indicated specifies an invalid Hexadecimal value for the path parameter.

System action

The server does not process the command.

User response

Check that the string representing the path contains only valid hexadecimal characters and contains an even number of characters. Reissue the command with a valid Hex string for the path parameter.

ANR27 64E command: Filespace *filespace name* cannot be renamed to new *filespace name*; a virtual file space with this name already exists for node *node name*.

Explanation

The file space name specified as a target name for the command was found to already exist as a virtual file space for the node specified. The command fails.

System action

Server operation continues, the command fails.

User response

Reissue the command with a different target filespace name

ANR27 65E command: The node *node name* has an invalid node type for virtual file space definitions; the

<p>node type must be NAS.</p> <p>Explanation</p> <p>A Define VirtualFSMapping command was entered with an invalid node type.</p>	<p>Name does not match the data format of storage pool <i>Storage Pool Name</i>.</p> <p>Explanation</p> <p>The data format of the indicated storage pools does not match. The requested operation failed.</p>	<p>Explanation</p> <p>The indicated process terminated for the indicated command because none of the data movers is accessible.</p> <p>System action</p> <p>The indicated process terminates.</p> <p>User response</p> <p>Examine the previous error messages for possible reasons a remote session could not be started.</p>	<p>PATH commands to verify that at least one NAS datamover has paths to the drives in the library.</p> <hr/> <p>ANR27 71E Move data process terminated for volume <i>volume name</i> - data mover inaccessible.</p>
<p>System action</p> <p>The server does not process the command.</p> <p>User response</p> <p>You might want to run this command again, specifying a node of TYPE=NAS.</p>	<p>System action</p> <p>The command fails.</p> <p>User response</p> <p>Use QUERY STGPOOL F=D to display the data format for various pools and determine which may be eligible for the operation. Choose a storage pool that has the matching data format and re-issue the command.</p>	<p>System action</p> <p>The indicated process terminates.</p> <p>User response</p> <p>Examine the previous error messages for possible reasons a remote session could not be started.</p>	<p>Explanation</p> <p>Move data processing terminated for the indicated volume because none of the data movers is accessible.</p>
<hr/> <p>ANR27 66W Command: Virtual file space name <i>vfs name</i> conflicts with file space on the network attached storage (NAS) device.</p>	<p>Use QUERY STGPOOL F=D to display the data format for various pools and determine which may be eligible for the operation. Choose a storage pool that has the matching data format and re-issue the command.</p> <hr/> <p>ANR27 68I Process process ID will use data mover <i>datamover name</i> for the operation.</p>	<hr/> <p>ANR27 70E Command: Process process ID skipped restoring data from volume <i>volume name</i> in storage pool <i>name storage pool</i> - drive path unavailable.</p>	<p>System action</p> <p>Move data ends for the indicated volume.</p> <p>User response</p> <p>Examine the previous error messages for possible reasons a remote session could not be started.</p>
<p>Explanation</p> <p>The specified server command has been entered with a virtual file space that has the same name as a file space on the NAS device.</p>	<p>Explanation</p> <p>The indicated data mover is being used by the indicated process.</p>	<p>Explanation</p> <p>The indicated process skipped restoring data from the indicated volume because none of the NAS type datamovers is available.</p>	<hr/> <p>ANR27 72E Command: Process process ID terminated - drive path or data mover unavailable.</p>
<p>System action</p> <p>The server operation continues.</p>	<p>System action</p> <p>The indicated data mover is being used by the indicated process.</p>	<p>System action</p> <p>The data in the indicated volume is not restored.</p>	<p>Explanation</p> <p>The indicated process terminated for the indicated command for one of the following reasons:</p>
<p>User response</p> <p>Ensure that no virtual file space mappings for this NAS device have the same name as an actual file space that exists on the NAS device.</p> <hr/> <p>ANR27 67E Command: The data format of storage pool <i>Storage Pool</i></p>	<p>The indicated data mover is being used by the indicated process.</p> <p>User response</p> <p>None.</p> <hr/> <p>ANR27 69E Command: Process process ID terminated - data mover inaccessible.</p>	<p>User response</p> <p>Use QUERY STGPOOL to obtain the device class to which the indicated source storage pool belongs. Use QUERY DEVCLASS to obtain the library containing the source storage pool. Then, use the QUERY DATAMOVER and QUERY</p>	<ul style="list-style-type: none"> • None of the data movers with paths to the drives in the library containing the source storage pool is available. • None of the data movers with paths to the drives in the library containing the

target storage pool is available.

System action

The indicated process ends.

User response

Use QUERY STGPOOL to obtain the device class to which the source or target storage pool belongs. Use QUERY DEVCLASS to obtain the library name that contains the source or target storage pool. Then, use the QUERY DATAMOVER and QUERY PATH commands to verify that at least one data mover has paths to the drives in the library.

ANR27 73E **Move data process terminated for volume volume name - drive path or data mover unavailable.**

Explanation

MOVE DATA processing terminated for the indicated volume for one of the following reasons:

- None of the data movers with paths to the drives in the library containing the source storage pool is available.
- None of the data movers with paths to the drives in the library containing the target storage pool is available.

System action

The indicated process ends.

User response

Use QUERY STGPOOL to obtain the device class to which the source or target storage pool belong. Use QUERY DEVCLASS to obtain the library name that contains the source or target storage pool. Then, use the QUERY DATAMOVER and QUERY PATH commands to verify that at least one data mover has paths to the drives in the library.

ANR27 74E **Command: Process process ID terminated - data format mismatch.**

Explanation

During restore processing, a data format mismatch occurred between the storage pool being restored and the copy storage pool.

System action

The indicated restore process terminates.

User response

Examine the previous error message to determine the name of the copy storage pool used for the restore. If possible, specify a copy storage pool that has the same data format as the storage pool being restored on the restore command.

ANR27 75W **Command: Process Process id encountered an output error. File on volume volume name skipped - Node node name, type**

file type, file space filespace name, file name file name, fsId filespace id.

Explanation

During copy or move operation, an output error was encountered. The indicated file was skipped.

System action

The file will not be processed.

User response

If possible, correct the error and re-run the command.

ANR27 76W **Transaction failed for session session number for node node name (client platform) - A storage pool for the target destination is associated with a container or cloud storage pool.**

Explanation

The specified session fails because an invalid storage pool is used to store the virtual volume.

System action

The specified session is ended and server operation continues.

User response

Ensure that container and cloud storage pools are not used with virtual volumes. The UPDATE

COPYGROUP command can be used to update the copy group destination to point to a valid storage pool.

ANR27 77I **REPLICATE NODE: Node node name is decommissioned and disabled.**

Explanation

The requested node is decommissioned, disabled for replication, and has been skipped.

System action

The replication proceeds, but this node is skipped.

User response

None.

ANR27 78I **Command: Inventory information is missing for object bfid.**

Explanation

During a read operation, a damaged record for a file was identified. The file is skipped.

System action

The file is not displayed.

User response

Correct the error in the file and reissue the **QUERY CLEANUP** command.

ANR27 79I **Command: Inventory information for all items cannot be displayed. A total of num files files are missing**

inventory information. The missing files are not displayed.	length characters.		
Explanation During a read operation, a damaged record for a file was identified. The file is skipped.	Explanation The directory specified for the indicated keyword is too long. Specify a directory less than or equal to the number of characters indicated. This is a limitation of the underlying database.	Explanation A required keyword was not specified for database format processing.	passwords for nodes and administrators.
System action The files are not displayed.	System action Server database format processing terminates.	System action Server database format processing terminates.	System action The command will be processed, but the server will disable the automatic protection of the encryption key(s).
User response Correct the error in the file and reissue the QUERY CLEANUP command.	User response Specify a valid value for the indicated keyword.	User response Reissue the format command with the required parameters.	User response None.
ANR27 80W Command: Updates for nodes previously processed during this command will be rolled back.	ANR27 82I SET DBRECOVERY completed successfully and device class for automatic DB backup is set to value.	ANR27 84W Specifying PROTECTKEYS=NO requires the server's encryption keys to be backed up manually.	ANR27 85E An error occurred when trying to access path name.
Explanation An error has occurred during an UPDATE NODE operation. If the UPDATE NODE command was processing more than one node, updates for nodes which were previously processed will be rolled back.	Explanation The device class requirement for automatic database backup is set with the SET DBRECOVERY command.	Explanation The server uses one or more encryption keys that are not stored in the server's database. During a database backup, if PROTECTKEYS=YES is specified, the server will back up these keys with the database so they can be restored during a database restore operation. Specifying PROTECTKEYS=NO will prevent the server from backing up these keys, which are essential for normal server operation. In this case you must manually save the dsmkeydb.kdb and dsmkeydb.sth files to a secure location, and make sure they are available when the restore database operation completes.	Explanation An access denied error occurred while attempting to access a directory.
System action Server operation continues.	System action None.		System action The command stops.
User response Correct the error and reissue the command.	User response None.		User response Verify permission for that directory is set correctly then reissue the command.
ANR27 81E command name: keyword value longer than max	ANR27 83E FORMAT: Required keyword keyword not specified.	Explanation Failure to protect these keys will make any server-encrypted data inaccessible, as well as all locally- stored	ANR27 86E The server was unable to find path name.
			Explanation The server could not find the directory specified.
			System action The command stops.
			User response Verify the existence of that directory and reissue the command.
			ANR27 87E The server failed with error

code last error when attempt to access path name.

Explanation

The server failed to access the directory specified.

System action

The command stops.

User response

Verify the existence of that directory and reissue the command.

ANR27 Database log 88E path path name is not empty.

Explanation

When specifying a new active, archive, or mirror log directory in the server options file or when formatting a server, the indicated directory must be empty to prevent and accidental overwrite of existing data.

System action

If a FORMAT operation was being performed, the operation stops. If this was a change to the server options file to specify a new log directory, the new directory is ignored, and the existing directory is used.

User response

Verify the directory that was specified. Delete any data in that directory if the data is not needed, or create a new

directory. Reissue the format command.

ANR27 Command: The 89E directory path deploy directory path is already used in a server device class or storage pool directory.

Explanation

The directory that was specified by the SET DEPLOYREPOSITORY command is already used in a device class or stgpool directory definition.

System action

The server does not process the command.

User response

Reissue the command by specifying a different directory path.

ANR27 Too many 90E symbolic links were found while traversing file path path name.

System action

The server stops processing the command.

User response

Refer to your operating system's manual for the maximum number of symbolic links allowed on a path name. Reduce the number of symbolic links that lead to the file path, and then reissue the command.

ANR27 The file or 91E volume name

path name is too long.

System action

The server stops processing the command.

User response

Check your operating system's limits on files and pathss length. Reissue the command with a shorter file or volume name.

ANR27 A component of 92E the path path name is not a directory.

Explanation

System action

The server stops processing the command.

User response

Verify all directories in the path of the file or volume name. Reissue the command with a valid file or volume path. command.

ANR27 An invalid value 93W for MAXTXNBYTE is found in the database value in bytes.

Explanation

The server detects an invalid value for MAXTXNBYTE in the database. The server will use the default value for MAXTXNBYTE and processing will continue.

System action

Th server initialization continues.

User response

No action is required

ANR27 LDAP password 94I set.

Explanation

The password that the server uses to authenticate with the LDAP server has been set, changed or removed with the SET LDAPPASSWORD command.

System action

None.

User response

None.

ANR27 command: 95I Repair failed processing backup sets for node node name. backup set count backup sets belonging to node count nodes were successfully repaired before the failure.

Explanation

The REPAIR BACKUPSET command encountered an error processing backup sets for the specified node. Some backup sets might have been successfully repaired.

System action

The command failed.
Some backup sets might have been repaired.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. Correct the problem and rerun the command.

ANR27 command: 96I Repair completed for backup set count backup sets belonging to node count nodes.

Explanation

The REPAIR BACKUPSET command completed after successfully repairing the retention initiation date for the indicated number of backup sets.

System action

The command completed.

User response

None.

ANR27 The license 97E value was skipped because of a bad date range.

Explanation

One or more license values were skipped due to the current system

date not being valid for the license. This message occurs when reading the nodelock file. This can occur during server start-up, license audit, or REGISTER LICENSE.

System action

Server operation fails.

User response

Verify the correct system date setting. After you correct the system date, the licenses that are registered with a quantity value will need to be registered again.

ANR27 Server 98E operation is denied - server is not licensed for License required.

Explanation

The server refuses a server operation because the server is not licensed with the appropriate support.

System action

Server operation fails.

User response

Obtain and register the appropriate license.

ANR27 Server 99W operation is in violation of server license terms - server is not licensed for License required.

Explanation

The server warns about a server operation because the server is not licensed

with the appropriate support.

System action

Server operation continues.

User response

Obtain and register the appropriate license.

ANR28 The license 00E manager cannot be started: diagcode.

Explanation

The license manager cannot be started during initialization because sufficient memory is not available. Diagnostic code *diagcode* is issued.

System action

Initialization fails.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR28 License 03I manager started.

Explanation

The license manager is started when the server is initialized. The license manager monitors license compliance.

System action

Server operation continues.

User response

None.

ANR28 Insufficient 04W memory is available for the license manager - will retry in number of seconds seconds.

Explanation

The server suspends license manager processing because sufficient server memory is not available.

System action

Server operation continues; the license manager operation will be retried after the specified delay.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR28 Insufficient 05W recovery log space available for the license manager - will retry in number of seconds seconds.

Explanation

The server suspends license manager processing because sufficient recovery log space is not available.

System action

Server operation continues; the license manager operation will be retried after the specified delay.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR28 06W Insufficient database space available for the license manager - will retry in number of seconds seconds.

Explanation

The server suspends license manager processing because sufficient database space is not available.

System action

Server operation continues; the license manager operation will be retried after the specified delay.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR28 07E Out of server log space in license manager.

Explanation

The server ends a database update transaction for the license manager because sufficient recovery log space is not available on the server.

System action

Server operation continues, but the database update fails.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR28 08E Out of server database space in license manager.

Explanation

The server ends a database update transaction for the license manager because sufficient database space is not available on the server.

System action

Server operation continues, but the database update fails.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR28 11W Command: The file system on which the directory path deploy directory

path resides has less than 40 gigabytes of free space.

Explanation

The directory that was specified by the SET DEPLOYREPOSITORY command resides on a file system that might not have enough free storage for client deployment packages.

System action

Server operation continues.

User response

If possible, reissue the SET DEPLOYREPOSITORY command and specify a directory path that resides on a file system with at least 40 gigabytes of free space.

ANR28 12W License Audit completed - ATTENTION: Server is NOT in compliance with license terms.

Explanation

The results from the AUDIT LICENSES command indicate the server is not in compliance with the terms of the current license.

System action

Server operation continues, but the REGISTER NODE command or backup-archive requests, or both, will fail.

User response

Use the QUERY LICENSE command to determine the license terms that are no longer in compliance.

ANR28 Command:
13E Parameter
parameter no longer valid on DEFINE STGPOOL.

Explanation

The specified server command has been entered with an parameter which is no longer valid. Parameters used to connect to the cloud are now tied to a connection rather than to a storage pool.

System action

The server ignores the command.

User response

To define a cloud container storage pool, specify the CONNECTION parameter with the name of an existing connection. Use DEFINE CONNECTION to define a new connection, or QUERY CONNECTION to view the currently existing connections. To update an existing storage pool's cloud parameters, use QUERY STGPOOL FORMAT=DETAILED to view the storage pool's connection, and then use UPDATE CONNECTION specifying that connection.

ANR28 A consistency
14E check failed on
data object

Object Id with error Error Code.

Explanation

A data integrity problem was found in the storage pool.

System action

The server checks the data as part of normal operation and encountered a data integrity problem.

User response

Issue the REPAIR STGPOOL command to repair the data or recover the data from a recovery server.

ANR28 Command:
15E Invalid value
specified for
interval
between license
audits - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid value.

ANR28 Command:
16E License audit or
register
operation
already in
progress.

Explanation

The server is currently performing a register license or license audit.

System action

The server does not process the specified command.

User response

Reissue the command after the license audit process or the register license command ends. Only one REGISTER LICENSE command or AUDIT LICENSE process can be running at a time. The REGISTER LICENSE command and the AUDIT LICENSE process may not run at the same time.

ANR28 Command:
17I License audit
started as
process process
ID.

Explanation

A background process has been started to audit the server for license compliance.

System action

The server checks the existing configuration for the server and compares it against the values for which the server is licensed.

User response

The administrator may query the status of the background process by using the QUERY PROCESS command, or cancel the process with

the CANCEL PROCESS command.

ANR28 A consistency
18E check failed on
container
Container ID
with error Error
Code. The data
object might be
damaged or
unavailable.

Explanation

As part of normal operations, the data in the storage pool was checked for consistency. A data integrity problem was found in the storage pool.

System action

Server operation continues.

User response

To repair the damaged data or recover the data from a recovery server, issue the **REPAIR STGPOOL** command. For detailed instructions about repairing and recovering data, search for "Repairing and recovering data" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ>).

ANR28 Command:
19E There is
insufficient
authority to
write data to
directory path
deploy directory
path.

Explanation

The server does not have the authority to create

files in the directory that is specified in the SET DEPLOYREPOSITORY command.

System action

The server does not process the command.

User response

Ensure that the user ID for the IBM Storage Protect instance has write permission on the directory that is specified in the SET DEPLOYREPOSITORY command.

ANR28 20I Automatic license audit started as process process ID.

Explanation

A background process has been started to audit the server for license compliance.

System action

The server checks storage utilization and registered nodes for the server and licensed factors, comparing these against the values for which the server is licensed.

User response

The administrator may query the status of the background process using the QUERY PROCESS command.

ANR28 21E Automatic license audit could not be started: diagcode.

Explanation

The license manager cannot start an automatic process to audit server licenses because sufficient memory is not available. Diagnostic code *diagcode* is issued.

System action

Server processing continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR28 22I Cancel in progress

Explanation

The license audit operation has been cancelled and will end when resources have been freed for the background process. This message may be displayed in response to a QUERY PROCESS command for an AUDIT LICENSES operation.

System action

Server operation continues.

User response

None.

ANR28 23I Have audited number of nodes nodes

Explanation

An AUDIT LICENSES operation is in progress. The process has audited the specified number of

nodes. This message may be displayed in response to a QUERY PROCESS command for an AUDIT LICENSES operation.

System action

Server operation continues.

User response

None.

ANR28 24I License audit process process number canceled - number of nodes nodes audited.

Explanation

A background server process to audit server licenses has been canceled by using the CANCEL PROCESS command. The number of nodes that have been audited before the operation ended are reported in the message.

System action

The server process is ended and server operation continues.

User response

None.

ANR28 25I License audit process process number completed successfully - number of nodes nodes audited.

Explanation

A background server process to audit server licenses has completed successfully

after auditing the specified number of nodes.

System action

The server process is ended and server operation continues.

User response

None.

ANR28 26I License audit process process number terminated in error - number of nodes nodes audited.

Explanation

A background server process to audit server licenses encounters an error and is ended. The number of nodes that have been audited before the operation ended is reported in the message.

System action

The server process is ended and server operation continues.

User response

None.

ANR28 27I Server is licensed to support feature name for a quantity of licensed quantity.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

**ANR28 Server is
28I licensed to
support feature
name.**

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

**ANR28 Command:
29E parameter -
parameter is not
allowed.**

Explanation

The UPDATE NODE command has been entered with a parameter that is not allowed.

System action

The server ignores the command.

User response

When updating the REPLMODE and REPLSTATE parameters on a node definition, there are restrictions that prohibit changing certain values. Several conditions are enforced during command processing that prevents unintended updates. The syntax processing is strictly

enforced and in many cases, it might be necessary to issue other commands prior to using UPDATE NODE.

For information about the UPDATE NODE command, search for "UPDATE NODE" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

**ANR28 Command: The
32I License
Manager has not
yet completed
initialization -
please retry this
command later.**

Explanation

While attempting to process the specified license command, the server detects that the licensing component of the server had not completed initialization. The licensing facility used on some platforms may require some time to initialize because network calls are involved, and waits may occur.

System action

Server operation continues; the command is not processed.

User response

Reissue the command after waiting 10 minutes. If this message is displayed after a number of retry attempts, contact your service representative.

**ANR28 Command: The
33I directory path
deploy directory
path is already**

**specified as the
current
deployment
repository
directory.**

Explanation

The directory that was specified by the SET DEPLOYREPOSITORY command is the same as the current deployment repository directory.

System action

Server operation continues; the command is not processed.

User response

Verify that the specified deployment repository directory path is correct.

**ANR28 Command: The
34E file system on
which the
directory path
deploy directory
path resides has
no free space.**

Explanation

The directory that was specified by the SET DEPLOYREPOSITORY command resides on a file system that has no free space available for client deployment packages.

System action

Server operation continues.

User response

Reissue the SET DEPLOYREPOSITORY command and specify a directory path that resides on a file system

with at least 40 gigabytes of free space.

**ANR28 Server is
35I licensed for
number of
clients clients.**

Explanation

This message is issued during server startup and in one hour increments thereafter.

System action

Server operation continues.

User response

None.

**ANR28 Policy creation
36E failed because
no storage pool
is available in
which to save
client
deployment
packages.**

Explanation

Without an available storage pool, the server cannot create a policy domain for the client deployment package data.

System action

Server operation continues, but the IBM_DEPLOY_CLIENT policy domain is not created.

User response

To resolve the issue, take one of the following actions:

1. Create a storage pool with at least 40 GB of free space.

2. Add more space to an existing storage pool. The storage pool should have at least 40 GB of free space.

ANR28 37E The creation of the IBM_DEPLOY_CLIENT policy domain for client deployment packages failed. See previous messages.

Explanation

The server cannot complete the creation of a policy for the client deployment package data. A policy is necessary to replicate client deployment packages to this server. Review the previous messages in the activity log to determine the cause.

System action

Server operation continues, but the IBM_DEPLOY_CLIENT policy domain is not created.

User response

To resolve the issue, complete the following steps:

1. Determine the reason for the failure by reviewing the messages in the activity log. In particular, review the messages for the commands that were run to create the IBM_DEPLOY_CLIENT policy domain.
2. Resolve any errors. After you resolve the errors, the server

automatically attempts to complete the policy creation.

ANR28 38W Command: The parameter parameter is not supported for nodes with TYPE=OBJECTCLIENT.

Explanation

A parameter that conflicts with the OBJECTCLIENT node type was specified in the command.

System action

The server bypasses the conflicting parameter and processing continues.

User response

Verify which parameter you want to use and reissue the command, if necessary. If the command needs to be reversed, undo the command, correct the syntax, and then reissue the command.

ANR28 39I Automatic license audit started as process process ID.

Explanation

A background process has been started to audit the server for license compliance.

System action

The server checks registered nodes and compares them against the value for which the server is licensed.

User response

The administrator may query the status of the background process by using the QUERY PROCESS command.

ANR28 40W Replication skipped files updated after replication started.

Explanation

The replication process skipped files that were updated after replication start. Check activity log for ANR3824W message for details. Q ACTLOG MSG=3824

System action

The replication completes, but there were node and file spaces with skipped files.

User response

Check activity log for ANR3824W message and check affected nodes and file spaces. To complete replication issue REPLICATE NODE command again for the node + file space.

ANR28 41W Server is NOT IN COMPLIANCE with license terms.

Explanation

This message is issued periodically when the server configuration does not comply with the terms for which it is licensed.

System action

Server operation continues.

User response

Use the QUERY LICENSE command to display the current server configuration with respect to licensed terms to discover which factors of the configuration do not conform to your license. Contact your service representative to obtain more licenses, if required.

ANR28 42I Server is licensed to support number of gigabytes gigabytes of storage.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 43I Server is licensed to support UNIX clients.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None. UNIX is a registered trademark in

the United States and other countries, licensed exclusively through X/Open Company Limited.

ANR28 Server is 44I licensed to support desktop clients.

Explanation

This message is issued during server startup and in one hour increments there after.

System action

Server operation continues.

User response

None.

ANR28 The addition of 47W client client node name is beyond the client capacity that the server is licensed to support.

Explanation

This message is issued when a new client node is added to the server with the REGISTER NODE command, or through open registration, and the actual number of nodes registered on the server exceeds the server's licensed capacity.

System action

Server operation continues.

User response

This message is issued as a reminder to the administrator that the server is not operating

within compliance of its license. Contact your service representative if more licenses are required for your server.

ANR28 Current license 52I information:

Explanation

This message is issued during a REGISTER LICENSE command to display the current licensing information for the server before the new license has been interpreted by the command. Messages appearing after this message display the factors under which the server is currently licensed.

System action

Server operation continues.

User response

None.

ANR28 New license 53I information:

Explanation

This message is issued during a REGISTER LICENSE command to display the updated licensing information for the server after the new license has been interpreted by the command. Messages appearing after this message display the updated factors under which the server is licensed.

System action

Server operation continues.

User response

Check to make sure that the new license information includes the updates that you intended for the REGISTER LICENSE command. If the license terms do not change, check the parameters and reissue the command, if you find that it was not entered correctly. If the REGISTER LICENSE command does not produce the desired updates in terms of licensing, contact your service representative.

ANR28 Server is 54I licensed for device support module module number.

Explanation

This message may be issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 The UPDATE 55W STGPOOLDIRECTORY command marks as destroyed all of the data that is stored in the container storage pool pool name in the storage pool directory directory name.

Explanation

An update stgpoolmdir command has been entered that will change the access of the stgpoolmdir to destroyed. This will mark all of the associated storage as needing recovery.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to end the process.

ANR28 The SHOW 56W ORPHANOBJEC T command with the clean option destroys all of the data that is orphaned and associated with node node name .

Explanation

A show orphanobject command has been entered that will destroy the objects associated with the specified node. This is a non-revertable action.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to end the process.

ANR28 Command: Node 58E node name is OSSM managed.

Explanation

The command shown specifies a node that is currently managed by OSSM.

System action

The server does not process the command.

User response

Contact the OSSM administrator.

ANR28 59I Server is licensed for Secondary Server Attachment.

Explanation

This message may be issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 60I Server is licensed to support disaster recovery manager.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 61I Server is licensed to support NETWORK connections.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 63I Server is licensed to support Enterprise Administration functions.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 64I Server is licensed to support Server-to-Server Virtual Volumes.

Explanation

This message is issued during server startup.

System action

Server operation continues.

User response

None.

ANR28 65W The server is NOT licensed to support Enterprise Administration functions. By performing this action you are no longer in compliance with license terms.

Explanation

This message is issued when enterprise administration functions are used, but the server is NOT licensed to support the functions.

System action

Server operation continues.

User response

To bring your installation back into conformance with license terms, obtain a license for enterprise administration functions or remove central logging definitions. Contact your service representative if you have any questions or concerns with this message.

ANR28 68E The server is NOT licensed to support Enterprise Administration functions.

Explanation

This message is issued when Enterprise Administration functions are used, but the server is NOT licensed to support the functions.

System action

The command fails.

User response

Contact your service representative if you want to obtain a license for enterprise administration.

ANR28 74I Records older than *ret_days* days have been pruned from commands approval history.

Explanation

Commands approval history has been pruned.

System action

Commands approval history has been pruned.

User response

To specify number of days to keep commands approval history use SET SUMMARYRETENTION command.

ANR28 75I Processing of the *rule*name storage rule has started.

Explanation

A command was issued or the Run Now button was clicked to start the specified storage rule.

System action

System operation continues.

User response

No action is required.

ANR28 79I The <i>stgrule_name</i> storage rule completed its processing, reclaiming <i>reclaimed_cntrs</i> of reclaimable containers by reading and writing <i>moved_bytes</i> to save <i>saved_bytes</i> .	<i>inactive_hours</i> hours of inactivity. Request ID: <i>requestId</i> .	System action None. User response Reissue the START STGRULE command and do not specify the SRCPOOLS or the TIERDELAY parameter.	Explanation A background process is already running for the specified storage rule.
ANR28 80W Reclamation process <i>process ID</i> ended for storage pool <i>storage pool name</i> because the specified duration was exceeded.	Explanation The request to issue the specified command is expired. Pending commands that are not approved within 72 hours are automatically rejected.	System action The specified command is no longer pending approval and will not run.	System action None. User response Determine which storage rules are currently running by issuing the QUERY PROCESS or QUERY JOB command. When the specified storage rule operation is complete, reissue the START STGRULE command.
Explanation The reclamation process exceeded the duration that was set when the storage rule was defined.	User response To successfully reissue the specified command, an administrator must reissue the command. Then, an approval administrator must approve the command request before the command runs. Approval administrators are specified by issuing the REGISTER ADMIN or UPDATE ADMIN command and specifying the CMDAPPROVER=YES parameter value.	Explanation To issue the START STGRULE command, you must specify one of the following action types: <ul style="list-style-type: none"> • ACTIONTYPE=TIERBYA GE • ACTIONTYPE=TIERBY TATE • ACTIONTYPE=NOTIER ING • ACTIONTYPE=RECLAIM • ACTIONTYPE=COPY • ACTIONTYPE=NOCOPY ING 	ANR28 85E The process for storage rule <i>storage rule name</i> was cancelled.
System action The reclamation process stops.	System action None.	User response Reissue the START STGRULE and ensure that the correct ACTIONTYPE parameter is defined for the storage rule.	Explanation The storage rule process was cancelled for one of the following reasons: <ul style="list-style-type: none"> • The value of the DURATION parameter that is specified for the DEFINE STGRULE command elapsed. • You issued the CANCEL PROCESS command to manually cancel the process.
User response No action is required. However, if you want to help ensure that the reclamation process is completed within the specified time, you can update the storage rule.	ANR28 82E You cannot use one or more of the specified parameters with this type of storage rule.	System action None.	System action None. User response None.
ANR28 81W A request for approval to process the <i>command</i> command, which was issued by administrator <i>administrator</i> , has expired after	Explanation You cannot specify the SRCPOOLS parameter or the TIERDELAY parameter when the ACTIONTYPE=RECLAIM parameter is specified.	ANR28 84E A background process is in progress for storage rule <i>storage rule name</i> .	ANR28 86E Storage rule <i>storage rule name</i> was not found.

Explanation

The storage rule that is specified does not exist.

System action

None.

User response

When you issue the **START STGRULE** command, ensure that the correct storage rule name is specified.

ANR28 Storage rule 87E *storage rule name had no eligible work to process.*

Explanation

The indicated storage rule had no eligible work to process for one of the following reasons:

- Another storage pool process is in progress for the source storage pool or the target storage pool.
- The *ACTIONTYPE=NOCOPYING* parameter value is specified for the indicated storage rule, and no subrules are defined.

System action

None.

User response

To resolve the issue, take one of the following actions:

- If another storage pool process is in progress, wait for the process to complete and reissue the **START STGRULE** command.

- If the *ACTIONTYPE=NOCOPYING* parameter value is specified for the indicated storage rule, ensure that the storage rule has a subrule defined for copying data.

ANR28 Storage pool 88E *storage pool name was not defined as a source storage pool for the storage rule storage rule name.*

Explanation

The storage pool that is specified was not defined for this storage rule.

System action

None.

User response

Ensure that the source storage pool was specified for the storage rule when the storage rule was defined. When you issue the **START STGRULE** command, the source storage pool name that you specify for the **SRCPOOLS** parameter must correspond with a source storage pool that is specified in the **DEFINE STGRULE** command.

ANR28 A storage pool 89E *for storage rule storage rule name is invalid.*

Explanation

The source storage pool or the target storage pool is invalid for this storage rule. You can only specify a container storage pool

as the source storage pool when you issue the **START STGRULE** command.

System action

None.

User response

Ensure that you specify a container storage pool as the source storage pool when you issue the **START STGRULE** command. Ensure that both the source storage pool and the target storage pool have valid access states. For example, ensure that neither storage pool has a state of UNAVAILABLE.

ANR28 The storage pool 90E *operation for storage rule storage rule name failed with return code return code*

Explanation

The storage pool operation failed with the specified return code.

System action

None.

User response

Your service representative can interpret the return code.

ANR28 A request for 91I *approval to process the command command, which was issued by administrator administrator, is withdrawn.*

Request ID:*requestId.*

Explanation

The administrator who issued the command withdrew the request for approval.

System action

The specified command is no longer pending approval and will not run.

User response

To successfully reissue the specified command, an administrator must reissue the command. Then, an approval administrator must approve the command request before the command runs. Approval administrators are specified by issuing the **REGISTER ADMIN** or **UPDATE ADMIN** command and specifying the **CMDAPPROVER=YES** parameter value.

ANR28 Administrator 92E *administrator issued the command command and cannot also approve the command. Request ID:requestId.*

Explanation

The specified administrator issued the command and attempted to approve command processing. However, the same administrator cannot issue and approve a command. The pending command must be approved by another

approval administrator. Approval administrators are specified by issuing the REGISTER ADMIN or UPDATE ADMIN command and specifying the CMDAPPROVER=YES parameter value.

System action

The command remains in a pending state and does not run until it is approved by a different approval administrator.

User response

To issue the command, ensure that a different approval administrator approves the command request.

ANR28 93W **A request for approval to process the command, which was issued by administrator requesting administrator, was rejected by approval administrator rejecting administrator. Request ID:requestId.**

Explanation

The designated approval administrator rejected the request to issue the command.

System action

The specified command is no longer pending approval and will not run.

User response

To successfully reissue the specified command, an administrator must reissue the command. Then, an approval administrator must approve the command request before the command runs. Approval administrators are specified by issuing the REGISTER ADMIN or UPDATE ADMIN command and specifying the CMDAPPROVER=YES parameter value.

ANR28 94E **Administrator administrator issued the command command and cannot also reject the command. Request ID:requestId.**

Explanation

The specified administrator issued the command and attempted to reject command processing. However, the same administrator cannot issue and reject a command. The pending command must be rejected or approved by another approval administrator. Approval administrators are specified by issuing the REGISTER ADMIN or UPDATE ADMIN command and specifying the CMDAPPROVER=YES parameter value.

System action

The command remains in a pending state until it is rejected or approved by a second administrator,

or withdrawn by the administrator who originally issued the command.

User response

To withdraw the request for approval of the command, the approval administrator who issued the command must issue the WITHDRAW PENDINGCMD command.

ANR28 95W **The command command is already in the approval queue. Request ID:requestId.**

Explanation

Because the command is already in the approval queue, the command was not resubmitted.

System action

System operation continues.

User response

To verify the state of the command, view the approval queue. To obtain command approval, contact the approver. If the command is no longer required, withdraw the command by running the WITHDRAW PENDINGCMD command. For example, if the approval request ID is 4, run the following command: withdraw pendingcmd 4

ANR28 96I **Command: resetting existing options for retention rule name to default values.**

Explanation

The update retrule command has reset existing options for the retention rule to default values. The change is required by the parameters specified with the update commands.

System action

Server operation continues.

User response

None.

ANR28 97E **Command: Invalid combination of enhanced schedule parameters or their values, parm1 and parm2, found for retention rule name.**

Explanation

The specified update command has been issued with either an invalid combination of parameters or their values, or a specified parameter or value is not compatible with an option that is not being updated for the existing retention rule. WEEKOFMONTH and DAYOFWEEK must not be specified with DAYOFMONTH. WEEKEND or WEEKDAY must be specified with the FIRST or LAST week of month.

System action

Server operation continues, but the

command is not processed.

User response

To see the options for the existing retention rule, issue: QUERY RETRULE FORMAT=DETAILED. Determine if the error was caused by one of the following:

- a conflict between parameters to the update command.
- a conflict between a parameter specified with the update command and a value that already exists for the retention rule.

For the latter problem, also update the existing option that is causing the problem. Correct the update command and issue it again.

ANR28 Command:
98W Invalid month and day, month day, detected for retention rule name.

Explanation

The specified update command has been issued with either an invalid combination of MONTH and DAYOFMONTH, or a specified MONTH or DAYOFMONTH value is incompatible with a MONTH or DAYOFMONTH value that is not being updated for the existing retention rule. If there is just one month and one day combination and that combination is invalid, the command will fail. If there is at least one valid month and day combination, the

retention rule will be updated and run on the valid dates. The schedule will skip the invalid month and day combinations.

System action

Server operation continues.

User response

To see the options for the existing retention rule, issue: QUERY RETRULE FORMAT=DETAILED. Determine the correct day and month combinations. If the command failed, issue the update command again.

ANR28 Command:
99E Operation is not valid for storage pool type storage pool storage pool name.

Explanation

The command indicated specifies a volume in a storage pool which is not valid for the command.

System action

The server does not process the command.

User response

Reissue the command with a volume in a valid storage pool.

ANR29 The character string 'string' was truncated during assignment.
00W

Explanation

Truncation occurred during assignment of

an SQL character string. For example, the expression CAST('Hello' AS CHAR(2)) will result in truncation because the string 'Hello' (length 5) can not fit in the target type CHAR(2) without loss of trailing characters.

System action

This warning can occur before or after SQL query processing, but does not terminate query processing.

User response

None.

ANR29 The result of character string concatenation was truncated.
01W

Explanation

Truncation occurred when the concatenation of character strings resulted in a length that exceeds the maximum character string length (250 for data type CHAR, and 2000 for data type VARCHAR).

System action

This warning can occur before or after SQL query processing, but does not terminate query processing.

User response

None.

ANR29 Insufficient memory was available to process the SQL statement.
02E

Explanation

Sufficient memory was not available to complete the processing of an SQL query.

System action

The SQL query is terminated.

User response

None.

ANR29 An SQL parser stack overflow occurred while processing token 'token'.
03E

Explanation

The internal stack used by the SQL query parser has overflowed. This typically occurs when too many column names or expressions have been specified in the SELECT clause.

System action

The SQL query is terminated.

User response

None.

ANR29 Unexpected SQL key word token - 'token'.
04E

Explanation

A syntax error occurred because an SQL key word was found that can not legally be used at the specified position within the SQL statement. Examples of SQL key words are SELECT, FROM, and WHERE.

System action

The SQL query is terminated.

User response

None.

**ANR29 Unexpected SQL
05E identifier token -
- 'token'.**

Explanation

A syntax error occurred because an SQL identifier was found that can not legally be used at the specified position within the SQL statement. Examples of SQL identifiers are table names and column names.

System action

The SQL query is terminated.

User response

None.

**ANR29 Unexpected SQL
06E literal token -
'token'.**

Explanation

A syntax error occurred because an SQL literal token was found that can not legally be used at the specified position within the SQL statement. Examples of SQL literal tokens are 'abc', 1.567, and DATE '1/1/96'.

System action

The SQL query is terminated.

User response

None.

**ANR29 Unexpected SQL
07E operator token -
'token'.**

Explanation

A syntax error occurred because an SQL operator token was found that can not legally be used at the specified position within the SQL statement. Examples of SQL operator tokens are +, *, <, and =.

System action

The SQL query is terminated.

User response

None.

**ANR29 Unexpected SQL
08E punctuation
token - 'token'.**

Explanation

A syntax error occurred because an SQL punctuation token was found that can not legally be used at the specified position within the SQL statement. Examples of SQL punctuation tokens are the period, the comma, and the parenthesis.

System action

The SQL query is terminated.

User response

None.

**ANR29 The SQL
09E statement is
incomplete;
additional
tokens are
required.**

Explanation

A syntax error occurred because, although the syntax of the SQL query expression was correct up to the end of the string, the parser expected additional tokens in order to form a syntactically-correct SQL statement.

System action

The SQL query is terminated.

User response

None.

**ANR29 Invalid SQL
10E token - 'token'.**

Explanation

An invalid SQL token was found. For example, the token formed by the character sequence "::-!" is not a valid SQL token.

System action

The SQL query is terminated.

User response

None.

**ANR29 Invalid SQL
11E numeric literal
token - 'token'.**

Explanation

An invalid SQL numeric literal token was found. For example, the floating point literal "1.456E" is not valid.

System action

The SQL query is terminated.

User response

None.

**ANR29 Invalid
12E character string
literal token -
'token'.**

Explanation

An invalid SQL character string literal token was found. For example, the hexadecimal literal X'78FG' is not valid because it contains the character 'G'.

System action

The SQL query is terminated.

User response

None.

**ANR29 Invalid SQL
13E identifier token
- 'token'.**

Explanation

An invalid SQL identifier token was found. For example, the character sequence "ABC.123" is not a valid identifier because the second part of the identifier, "123", does not begin with a letter.

System action

The SQL query is terminated.

User response

None.

**ANR29 SQL identifier
14E token 'token' is
too long; name
or component
exceeds 18
characters.**

Explanation

An SQL identifier token was found that exceeds the maximum length of 18 characters per component.

System action

The SQL query is terminated.

User response

None.

ANR29 15E The SQL token beginning with '*token*' is missing an ending delimiter.

Explanation

An SQL token was found that is missing its ending delimiter. For example, each of the tokens 'abc', 'abc', and X'abc is missing its ending delimiter.

System action

The SQL query is terminated.

User response

None.

ANR29 16E The SQL data types *data type* and *data type* are incompatible for operator '*operator*'.

Explanation

The data types of the operands are not compatible when used with the specified operator. For example, the expression 3 + 'abc' is not valid because

the operand data types INTEGER and CHAR(3) are not compatible for the addition operator "+".

System action

The SQL query is terminated.

User response

None.

ANR29 17E The SQL data type of expression '*expression*' is *data type*; expecting an integer expression.

Explanation

An SQL expression of data type SMALLINT, INTEGER, or DECIMAL with scale zero is expected.

System action

The SQL query is terminated.

User response

None.

ANR29 18E The SQL data type of expression '*expression*' is *data type*; expecting a Boolean expression.

Explanation

An SQL expression of data type BOOLEAN is expected.

System action

The SQL query is terminated.

User response

None.

ANR29 19E The SQL data type of expression '*expression*' is *data type*; expecting a numeric expression.

Explanation

An SQL expression of numeric data type SMALLINT, INTEGER, DECIMAL, NUMERIC, REAL, FLOAT, or DOUBLE_PRECISION is expected.

System action

The SQL query is terminated.

User response

None.

ANR29 20E The SQL data type of expression '*expression*' is *data type*; expecting a numeric or interval expression.

Explanation

An SQL expression of numeric data type (SMALLINT, INTEGER, DECIMAL, NUMERIC, REAL, FLOAT, DOUBLE) or of interval data type (INTERVAL) is expected.

System action

The SQL query is terminated.

User response

None.

ANR29 21E The SQL data type of expression '*expression*' is *data type*; expecting a character string expression.

Explanation

An SQL expression of character string type CHAR or VARCHAR is expected.

System action

The SQL query is terminated.

User response

None.

ANR29 22E The SQL data type of expression '*expression*' is *data type*; expecting a date, timestamp, character string date, character string timestamp, or interval expression.

Explanation

An SQL expression was expected of one of the types DATE, TIMESTAMP, CHAR, VARCHAR, or INTERVAL as the operand to the EXTRACT function. In the case of CHAR or VARCHAR, the expression must be a valid character string representation of a date or a timestamp.

System action

The SQL query is terminated.

User response

None.

ANR29 23E The SQL data type of expression *'expression'* is **data type; expecting a time, timestamp, character string time, character string timestamp, or interval expression.**

Explanation

An SQL expression was expected of one of the types TIME, TIMESTAMP, CHAR, VARCHAR, or INTERVAL as the operand to the EXTRACT function. In the case of CHAR or VARCHAR, the expression must be a valid character string representation of a time or a timestamp.

System action

The SQL query is terminated.

User response

None.

ANR29 24E The SQL data type of expression *'expression'* is **data type; expecting a date or character string date expression.**

Explanation

An SQL expression was expected of one of the types DATE, CHAR, or VARCHAR. In the case of CHAR or VARCHAR, the expression must be a valid character string representation of a date.

System action

The SQL query is terminated.

User response

None.

ANR29 25E The SQL data type of expression *'expression'* is **data type; expecting a time or character string time expression.**

Explanation

An SQL expression was expected of one of the types TIME, CHAR, or VARCHAR. In the case of CHAR or VARCHAR, the expression must be a valid character string representation of a time.

System action

The SQL query is terminated.

User response

None.

ANR29 26E The SQL data type of expression *'expression'* is **data type; expecting a date, timestamp, character string**

date, or character string timestamp expression.

Explanation

An SQL expression was expected of one of the types DATE, TIMESTAMP, CHAR, or VARCHAR. In the case of CHAR or VARCHAR, the expression must be a valid character string representation of a date or a timestamp.

System action

The SQL query is terminated.

User response

None.

ANR29 27E The SQL data type of expression *'expression'* is **data type; expecting an interval containing a single date-time field.**

Explanation

An SQL expression was expected of data type INTERVAL YEAR, INTERVAL MONTH, INTERVAL DAY, INTERVAL HOUR, INTERVAL MINUTE, or INTERVAL SECOND, all of which contain a single date-time field. Multi-field interval types (for example, INTERVAL DAY TO SECOND) are not allowed.

System action

The SQL query is terminated.

User response

None.

ANR29 28E A number can **not be converted to SQL data type INTERVAL if the interval contains multiple date-time fields.**

Explanation

An attempt was made to convert a number to the data type INTERVAL, but the target interval contains multiple date-time fields (for example, INTERVAL DAY TO SECOND). Only the single-field interval types INTERVAL YEAR, INTERVAL MONTH, INTERVAL DAY, INTERVAL HOUR, INTERVAL MINUTE, or INTERVAL SECOND can be specified.

System action

The SQL query is terminated.

User response

None.

ANR29 29E The expression *'expression'* is **not an integer constant.**

Explanation

An integer constant such as 1 or -9 is expected. For example, the DECIMAL function requires that the precision and scale operands be integer constants. A decimal constant such as 1.67 is not valid.

System action

The SQL query is terminated.

User response

None.

ANR29 30E A subquery used in an SQL expression must specify a single result column.

Explanation

A subquery used in an expression can not specify multiple result columns. For example, the expression X > (select A,B from T) is invalid because it specifies two result columns (A and B).

System action

The SQL query is terminated.

User response

None.

ANR29 31E A subquery expression may not contain a reference to a column name that is contained in an outer query expression.

Explanation

A subquery contains a reference to a column name in an outer query expression.

System action

The SQL query is terminated.

User response

None.

ANR29 32E The maximum nesting depth for subquery expressions has been exceeded.

Explanation

Too many nested subqueries were specified.

System action

The SQL query is terminated.

User response

None.

ANR29 33E The WHERE clause must not contain an aggregate function.

Explanation

The use of the aggregate functions COUNT, MAX, MIN, SUM, AVG, VARIANCE, or STDDEV in the WHERE clause is not allowed.

System action

The SQL query is terminated.

User response

None.

ANR29 34E The result data type of a CASE expression can not be determined; at least one non-null THEN or ELSE expression must be specified.

Explanation

The result data type of a CASE expression can not be determined because all of the THEN expressions and the ELSE expression (if present) specifies the NULL key word.

System action

The SQL query is terminated.

User response

None.

ANR29 35E The date-time field *field* is not present in the expression '*expression*' (data type *data type*).

Explanation

The specified date-time field (YEAR, MONTH, DAY, HOUR, MINUTE, or SECOND) is not contained in the data type of the expression.

System action

The SQL query is terminated.

User response

None.

ANR29 36E The SQL aggregate function *function* can not be nested within another aggregate function.

Explanation

One of the aggregate functions COUNT, MAX,

MIN, SUM, AVG, VARIANCE, or STDDEV was found nested within another aggregate expression.

System action

The SQL query is terminated.

User response

None.

ANR29 37E An SQL subquery expression can not be nested within an aggregate function.

Explanation

An expression containing a subquery was found nested within one of the aggregate functions COUNT, MAX, MIN, SUM, AVG, VARIANCE, or STDDEV.

System action

The SQL query is terminated.

User response

None.

ANR29 38E The column '*column*' is not allowed in this context; it must either be named in the GROUP BY clause or be nested within an aggregate function.

Explanation

A column reference was specified that is neither a column specified in a GROUP BY clause nor is

a column nested in one of the aggregate functions COUNT, MAX, MIN, SUM, AVG, VARIANCE, or STDDEV. The use of the column reference is prohibited because either 1) the GROUP BY clause has been specified, 2) the HAVING clause has been specified, or 3) at least one aggregate function is present.

System action

The SQL query is terminated.

User response

None.

ANR29 39E The reference 'reference' contains an unknown SQL table name.

Explanation

A table name in the SQL command is not one of the base tables defined by the server's database. The rows of the table SYSCAT.TABLES can be selected to obtain a list of all of the valid base tables.

System action

The SQL query is terminated.

User response

Retry the command using a table that is defined by the IBM Storage Protect server database.

ANR29 40E The command 'reference' contains an unknown SQL column name.

Explanation

A column name in the SQL command is not one of the base table columns defined by the server's database. The rows of the table SYSCAT.COLUMNS can be selected to obtain a list of all of the valid base table columns. If a two-part (compound) column reference such as X.Y is specified, then the correlation name X must be one of the active correlation names for the query.

System action

The SQL query is terminated.

User response

None.

ANR29 41E The column reference 'column reference' matches more than one SQL column name.

Explanation

The specified column reference is ambiguous because it matches the columns associated with multiple tables.

System action

The SQL query is terminated.

User response

None.

ANR29 42E The column reference 'column reference' is not allowed in this context because

it is part of an outer SQL query expression.

Explanation

The specified column reference is not allowed because it names a column of some outer query expression. Such references are not allowed when contained within the expressions of the HAVING and SELECT clauses.

System action

The SQL query is terminated.

User response

None.

ANR29 43E The column reference 'column reference' is a duplicate of another SQL column name in the same list.

Explanation

A duplicate column reference was specified within the same GROUP BY or ORDER BY list of columns.

System action

The SQL query is terminated.

User response

None.

ANR29 44E The reference 'reference' is an unknown SQL scalar function name.

Explanation

The specified function reference is not the name of a valid scalar function.

System action

The SQL query is terminated.

User response

None.

ANR29 45E Too few arguments are specified for SQL scalar function function.

Explanation

Too few function arguments were specified. For example, the expression LEFT(x) is invalid because the LEFT function requires at least two arguments.

System action

The SQL query is terminated.

User response

None.

ANR29 46E Too many arguments are specified for SQL scalar function function.

Explanation

Too many function arguments were specified. For example, the expression UPPER(x,y) is invalid because the UPPER function requires exactly one argument.

System action

The SQL query is terminated.

User response

None.

ANR29 47E Division by zero was detected for operator 'operator'.

Explanation

An attempt to divide by the number zero was detected for the specified SQL operator. The most likely cause of the problem is that one of the values of a column is zero, and that column is used in the denominator of a division operation. To protect against this case the NULLIF function can be used. For example, instead of the expression 1/X, specify 1/NULLIF(X,0), which will set the expression to null whenever the value if X is zero.

System action

The SQL query is terminated.

User response

None.

ANR29 48E The value 'value' can not be assigned or converted to SQL data type data type.

Explanation

A value could not assigned or converted to a value in the specified SQL data type because either 1) the data type

of the value can not be legally cast to the target data type (for example, data type TIME can not be converted to data type INTEGER); 2) the assignment of the value results in overflow in the target data type (for example, the decimal value 12345678.34 can not be assigned to data type DECIMAL(3,2) because the precision of the target type is exceeded); or 3) the syntax of a character string value is not appropriate for the target data type (for example, the string 'abc' can not be converted to data type DATE).

System action

The SQL query is terminated.

User response

None.

ANR29 49E Arithmetic overflow occurred for SQL operator 'operator'.

Explanation

An arithmetic overflow occurred for the specified operator. Examples of this include: 1) the application of the unary negation operator to the smallest INTEGER value (-2147483648) causes overflow because the result can not be represented in 2's complement; 2) the sum of the set of INTEGER column values applied to the SUM aggregate function can not be represented within the

precision of INTEGER type.

System action

The SQL query is terminated.

User response

None.

ANR29 50E Arithmetic or date-time overflow occurred for SQL operator 'operator' for values 'value' (data type data type) and 'value' (data type data type).

Explanation

An arithmetic or date-time overflow occurred for the specified operator. The values that caused the overflow (and their SQL data types) are displayed.

System action

The SQL query is terminated.

User response

None.

ANR29 51E The value 'value' (data type data type) is not a valid argument for operator 'operator'.

Explanation

An invalid value was specified as an argument to an SQL operator. For example, the expression SQRT(-1) is not valid because the argument

to the SQRT function is negative.

System action

The SQL query is terminated.

User response

None.

ANR29 52E The value 'value' (data type data type) is not a valid character string representation of an SQL date or a timestamp for operator 'operator'.

Explanation

An invalid character string representation of a DATE or TIMESTAMP was specified. For example, the string 'abc' is neither a valid date nor a timestamp.

System action

The SQL query is terminated.

User response

None.

ANR29 53E The value 'value' (data type data type) is not a valid character string representation of an SQL time or a timestamp for operator 'operator'.

Explanation

An invalid character string representation of a TIME or TIMESTAMP was specified. For example,

the string 'g pm' is neither a valid time nor a timestamp.

System action

The SQL query is terminated.

User response

None.

ANR29 54E An SQL subquery used in a scalar expression must yield a table that contains at most one row.

Explanation

This error results when a subquery used in a scalar expression returns multiple rows, thereby making it ambiguous as to which value should be returned.

System action

The SQL query is terminated.

User response

Respecify the subquery (for example, using the WHERE clause) so that the subquery returns at most one row.

ANR29 55E The SQL character string expression 'expression' must return a single character.

Explanation

A single-character character string was expected for the ESCAPE clause of the LIKE operator, for the trim character of the TRIM

operator, or for the pad character of the LEFT or RIGHT function. For example, the string 'Hello' is invalid because it contains multiple characters.

System action

The SQL query is terminated.

User response

None.

ANR29 56E Unable to access SQL base table 'table'.

Explanation

An error occurred when attempting to read rows from one of the SQL base tables. This message is typically preceded by another error describing the condition.

System action

The SQL query is terminated.

User response

None.

ANR29 57E An error occurred inserting a row in an SQL temporary table. The server database size may need to be increased

Explanation

An error occurred when attempting to insert a row into a temporary table being used for an SQL query. This message is typically preceded by another error describing

the condition. In many cases this error can be resolved by increasing the size of the server database. Free space in the database is used to store temporary tables created during the execution of an SQL SELECT query.

System action

The SQL query is terminated.

User response

None.

ANR29 58E SQL temporary table storage has been exhausted.

Explanation

The result of an SQL query could not be computed because temporary table storage space was unavailable. By issuing the QUERY DB command and viewing the Maximum Reduction parameter, you can determine the amount of space that is available for temporary table storage space. If the parameter is less than 4, the storage space becomes exhausted and the SQL query can no longer run. Complex SQL queries such as the ORDER BY clause, the GROUP BY clause, and the DISTINCT operator can cause additional temporary table space to be required.

System action

The SQL query is terminated.

User response

If your database is full, increase the size of the database. If your database is fragmented (Where the Available space parameter is greater than 4, but the Maximum Reduction parameter is less than 4), you must either unload and load your database or add avolume.

ANR29 59E SQL temporary table row is too wide.

Explanation

A row could not be inserted into an SQL temporary table because the row is too wide. This can occur if 1) there are too many columns in the row being inserted, or 2) the sum of the lengths of the columns in the row is too wide. Temporary tables are used when 1) the ORDER BY clause is specified; 2) the GROUP BY clause is specified; or 3) the DISTINCT operator is specified.

System action

The SQL query is terminated.

User response

Reduce the number of columns specified in the ORDER BY and/or GROUP BY clauses.

ANR29 60E Unexpected SQL enumerated type name token - 'token'.

Explanation

A syntax error occurred because an SQL

enumerated type name was found that can not legally be used at the specified position within the SQL statement. A list of all of the enumerated types declared by the server can be found in the SQL catalog table SYSCAT.ENUMTYPES.

System action

The SQL query is terminated.

User response

None.

ANR29 61E Invalid SQL enumerated type name - 'name'.

Explanation

A syntax error occurred because an SQL enumerated type name was expected, but the specified name is not one of the declared enumerated types. For example, the literal expression XXX::YYYY is illegal because XXX is not a valid enumerated type name. A list of all of the enumerated types declared by the server can be found in the SQL catalog table SYSCAT.ENUMTYPES.

System action

The SQL query is terminated.

User response

None.

ANR29 62E Unable to resolve SQL enumerated type for value 'value'.

Explanation

A syntax error occurred because an unqualified SQL enumerated value name was specified, but, because that value name is a member of more than one enumerated type, its type could not be resolved. For example, the enumerated value name YES belongs to more than one enumerated type, and so the result type of the expression YES = YES can not be resolved. A list of all of the enumerated types declared by the server can be found in the SQL catalog table SYSCAT.ENUMTYPES.

System action

The SQL query is terminated.

User response

None.

ANR29 63W This SQL query may produce a very large result table, or may require a significant amount of time to compute.

Explanation

An SQL query has been posed that could potentially cause a very large number of rows to be returned and displayed, or may involve a large amount of processing time before the first result table row can be generated.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with SQL query processing or 'N' to terminate the query.

ANR29 64E The reference 'reference' is not a column of the SQL result table.

Explanation

The ORDER BY clause specified a column that is not part of the result table for the SQL query. Only those columns named in the select list are part of the result table.

System action

The SQL query is terminated.

User response

None.

ANR29 65E An SQL temporary table cannot be built. required columns columns are needed. maximum columns is the maximum.

Explanation

A temporary table *required columns* wide is needed to complete processing for an SQL query. The maximum degree of an SQL table is *maximum columns*. The table will not be created.

System action

The SQL query is terminated.

User response

If the ORDER BY and/or GROUP BY clauses were specified, reduce the number of columns needed for the result table.

ANR29 66E Command/process: Database temporary table storage has been exhausted.

Explanation

The named command or operation could not be completed because insufficient temporary table storage space was available. Free space in the server database is used to store temporary tables created during the execution of the named command or process.

System action

The named command or process is terminated.

User response

Extend the server database (after adding database volumes if necessary) and rerun the command or process.

ANR29 67E Command: The node name object client node cannot be replicated.

Explanation

Object client nodes are not supported on the target replication server.

System action

The node and its data are not replicated to the target server.

User response

Reissue the command without specifying the object client node.

**ANR29 Database
68E backup
terminated. Db2
sqlcode:
sqlcode. Db2
sqlerrmc:
sqlerrmc.**

Explanation

Db2 detected a problem during the backup operation. Sources of the problem might include:

1. IBM Storage Protect API configuration errors for the Db2 instance in which the IBM Storage Protect server database resides.
2. An error related to the Db2 backup operation.
3. Errors related to the target backup device.

System action

The database backup is terminated.

User response

If the message indicates Db2 sqlcode 2033, then the problem is probably the IBM Storage Protect API configuration. The Db2 instance uses the IBM Storage Protect API to copy the IBM Storage Protect database-backup image to the IBM Storage Protect server-attached

storage devices. Common sqlerrmc codes include:

1. 50 - To determine whether an error created the API timeout condition, look for any IBM Storage Protect server messages that occurred during the database-backup process and that were issued before ANR2968E. Ensure that the IBM Storage Protect API options file has the correct TCPSERVERADDR and TCPPORT options specified for the IBM Storage Protect server being backed up. If the option settings are wrong, correct them for the Db2 instance.
2. 53 - Ensure that the NODENAME option in the IBM Storage Protect API options files is set to \$\$_TSMDBMGR_\$\$\$. Also verify the TCPSERVERADDRESS setting. If the keyword "localhost" is being used verify that this is being resolved correctly by issuing the command "ping localhost" from a system command window. If the ping of localhost fails, consider changing the TCPSERVERADDRESS to the explicit loopback address of 127.0.0.1. As an alternative to setting the explicit loopback address of 127.0.0.1, verify the TCP/IP configuration and whether or not "localhost" is configured correctly. For example, for Unix
- or Linux systems, verify that /etc/hosts has an appropriate entry for "localhost".
3. 106 - Ensure that the Db2 Instance DSMI_DIR environment variable is pointing to the location of the IBM Storage Protect API executables and the dsm.sys configuration file. If the DSMI_DIR setting is wrong, correct it for the Db2 instance, and then restart the Db2 instance.
4. 400 - Ensure that the options specified in the IBM Storage Protect API options file are valid.
5. 406 - Ensure that the Db2 instance owner has at least read access to the IBM Storage Protect API options file. Ensure that the Db2-instance DSMI_CONFIG environment variable is pointing to a valid options file for the IBM Storage Protect API. If the DSMI_CONFIG setting is wrong, correct it for the Db2 instance, and then restart the Db2 instance.
6. 450,451 - Ensure that the server options file and the IBM Storage Protect API options file both contain the COMMETHOD SHARED MEM option. Ensure that the values for the SHMPORT option in each options file correspond. Restart the server if you

change any values in the server options file.

7. For descriptions of other sqlerrmc values, look in the dsmrc.h file that is installed with the IBM Storage Protect API.

If this message is issued with a Db2 sqlcode that is not 2033, then look for more information about the error by opening a Db2 command-line processor window and typing: ? SQLsqlcode. For example, db2 => ? sql2428

**ANR29 Database
69E restore
terminated. Db2
sqlcode:
sqlcode. Db2
sqlerrmc:
sqlerrmc.**

Explanation

Db2 detected a problem during the restore operation. Sources of the problem might include:

1. IBM Storage Protect API configuration errors for the Db2 instance in which the IBM Storage Protect server database resides.
2. Errors related to the Db2 restore operation.
3. Errors related to the target backup device.
4. The IBM Storage Protect API client configuration used by the current instance is not able to access the backup image.

System action

The database restore operation is terminated.

User response

If the message indicates Db2 sqlcode 2033, then the problem is most likely the IBM Storage Protect API configuration. The Db2 instance uses the IBM Storage Protect API to copy the IBM Storage Protect database restore image from the IBM Storage Protect server-attached storage devices to Db2. Common sqlerrmc codes include:

1. 50 - To determine whether an error created the API timeout condition, look for any IBM Storage Protect server messages that occurred during the backup DB process and that were issued before ANR2969E. Ensure that the IBM Storage Protect API options file has the correct TCPSERVERADDR and TCPPORT options specified for the IBM Storage Protect server being backed up. If the option settings are wrong, correct them for the Db2 instance.
 2. 53 - Ensure that the NODENAME option in the IBM Storage Protect API options files is set to \$ _TSMDBMGR_\$\$.
 3. 106 - Ensure that the Db2-instance DSMI_DIR environment variable is pointing to the location of the IBM Storage Protect API executables and the dsm.sys configuration file. Ensure that you have the correct permissions to access these locations. If the DSMI_DIR setting is wrong, correct it for the Db2 instance, and then restart the Db2 instance.
 4. 400 - Ensure that the options specified in the IBM Storage Protect API options file are valid.
 5. 406 - Ensure that the Db2 instance owner has at least read access to the IBM Storage Protect API options file. Ensure that the Db2 Instance DSMI_CONFIG environment variable is pointing to a valid options file for the IBM Storage Protect API. If the DSMI_CONFIG setting is wrong, correct it for the Db2 instance, and then restart the Db2 instance.
 6. 450,451 - Ensure that the server options file and the IBM Storage Protect API options file both contain the COMMETHOD SHAREDMMEM option. Ensure that the values for the SHMPORT option in each options file correspond. Restart the server if you change any values in the server options file.
 7. For descriptions of other sqlerrmc values, look in the dsmrc.h file that is installed with the IBM Storage Protect API.
- If the message indicates Db2 sqlcode 2542, then the problem is probably because IBM Storage Protect API version for database restore is not

the same API version for database backup. Check IBM Storage Protect API version:

1. AIX - /bin/sh -c "lspp -lcq tivoli.tsm.client.api.64 bit"
2. Solaris - /bin/sh -c "cat /var/sadm/pkg/TIVsmCapi/pkginfo | grep VERSION"
3. HP- /bin/sh -c "cat /var/adm/sw/products/TIVsm64/CLIENT_API64/INDEX | grep ^revision"
4. Linux - rpm -q TIVsm-API64-* --qf %{VERSION}.%{RELEASE}\\n
5. Windows - reg query "HKEY_LOCAL_MACHINE\SOFTWARE\IBM\A DSM\CurrentVersion\A pi"

If this message is issued with a Db2 sqlcode that is not 2033 or 2542, then look for more information about the error by opening a Db2 command-line processor window and typing: ? SQLsqlcode. For example, db2 => ? sql2428

ANR29 Database 70E rollforward terminated - Db2 sqlcode sqlcode sqlerrmc sqlerrmc

Explanation

There is a problem detected by Db2.

System action

The database rollforward is terminated.

User response

More information about the error is available by opening a Db2 command-line processor window and typing: ? SQLsqlcode. For example, db2 => ? sql2428

ANR29 Database 71E backup/restore/rollforward terminated - Db2 sqlcode sqlcode error.

Explanation

There is a problem detected by Db2.

System action

The database backup/restore/rollforward is terminated.

User response

More information about the error is available by opening a Db2 command-line processor window and typing: ? SQLsqlcode. For example, db2 => ? sql2428

ANR29 Restore DB 72E Command: Database restore/rollforward terminated - Not able to clean up log directory directory name.

Explanation

IBM Storage Protect tried to clean up this log directory before PIT restore DB and not able to.

System action

The database restore/rollforward is terminated.

User response

Please clean up this directory manually before performing DB PIT restore.

ANR29 73E *Restore DB Command: Database restore/rollforward terminated - Log directory is required and does not exist directory name.*

Explanation

The log directory is required and it does not exist. PIT restore DB is terminated.

System action

The database restore/rollforward is terminated.

User response

Create the specified directory and retry.

ANR29 74I *Offline DB backup for database DB Alias completed successfully.*

Explanation

Offline DB backup completed successfully.

System action

None.

User response

None.

ANR29 75E *Offline DB backup for database DB Alias failed with sqlcode sqlcode and sqlerrmc sqlerrmc.*

Explanation

The Offline Database backup failed.

System action

User response

ANR29 76I *Offline DB backup for database DB Alias started.*

Explanation

Offline DB backup started.

System action

None.

User response

None.

ANR29 77E *Command: The command failed because of an issue in the device configuration file.*

Explanation

The device configuration file includes one or more invalid values.

System action

The server ends the current operation.

User response

Correct the issue in the device configuration file and run the command again.

ANR29 78E *Command: Invalid directory name - directory name.*

Explanation

Restore DB failed due to invalid target directory name in device target directory file.

System action

None.

User response

Correct the problem in target directory file and retry.

ANR29 79E *Internal error - Control descriptor is NULL.*

Explanation

Something is wrong the control descriptor is NULL.

System action

None.

User response

None.

ANR29 80E *Database backup terminated TCPIP failure - Db2 sqlcode sqlcode sqlerrmc sqlerrmc.*

Explanation

There is a TCPIP failure detected by Db2.

System action

The database backup is terminated.

User response

Correct the TCPIP setup problem between IBM Storage Protect and Db2 and retry.

ANR29 81E *Database backup terminated due to environment or setup issue related to file access - Db2 sqlcode sqlcode sqlerrmc sqlerrmc.*

Explanation

There is a problem related to environment or setup detected by Db2.

System action

The database backup is terminated.

User response

Ensure that you specified the correct file or directory name, correct the permissions, or specify a new location and retry.

ANR29 82E *Database backup terminated due to environment or setup issue related to password - Db2 sqlcode sqlcode sqlerrmc sqlerrmc.*

Explanation

There is a problem related to environment or setup detected by Db2.

System action

The database backup is terminated.

User response

If the IBM Storage Protect parameter PASSWORDACCESS is set to GENERATE, remove the PASSWORDACCESS parameter or set it to PROMPT.

ANR29 Database backup terminated due to environment or setup issue related to DSMI_DIR - Db2 sqlcode sqlerrmc sqlerrmc.

Explanation

There is a problem related to environment or setup detected by Db2.

System action

The database backup is terminated.

User response

Ensure that DSMI_DIR points to a directory containing the correct version of db2tca, restart the instance, and execute the command again.

ANR29 Database backup terminated due to environment or setup issue related to DSMI_CONFIG -

**Db2 sqlcode
sqlcode
sqlerrmc
sqlerrmc.**

Explanation

There is a problem related to environment or setup detected by Db2.

System action

The database backup is terminated.

User response

Ensure that the DSMI_CONFIG environment variable points to a valid IBM Storage Protect options file. Ensure that the instance owner has read access to the dsm.opt file. Ensure that the DSMI_CONFIG environment variable is set in the db2profile.

ANR29 Database backup terminated due to I/O error related to TCPIP - Db2 sqlcode sqlerrmc sqlerrmc.

Explanation

There is a TCPIP problem detected by Db2 and caused the database backup to fail.

System action

The database backup is terminated.

User response

The possible TCPIP problem are connection time out, connection

refused, bad host name or network unreachable. Correct the TCPIP problem between IBM Storage Protect and Db2 and retry.

ANR29 Database backup terminated due to I/O error - Db2 sqlcode sqlerrmc sqlerrmc.

Explanation

There is a I/O problem detected by Db2 and caused the database backup to fail.

System action

The database backup is terminated.

User response

Correct the I/O problem between IBM Storage Protect and Db2 and retry.

ANR29 Session ended because of machine GUID or local host IP address mismatch.

Explanation

Backup or Restore DB commands are only allowed when the IBM Storage Protect database being backed up or restored and the IBM Storage Protect api and the IBM Storage Protect server are on the same machine. Either the GUID of the IBM Storage Protect api client in use by the database manager does not match the GUID of the IBM Storage

Protect server or the local host IP address indicated by the IBM Storage Protect client is not accepted.

System action

The database backup or restore operation is terminated.

User response

Default acceptable local host addresses are "127.0.0.1" for IPV4 and ":::1" for IPV6. If you can not configure one of these local host addresses on your system then use the IBM Storage Protect server option "DBMTRUSTEDIPADDR ipaddr" to set a local host address that can be accepted.

ANR29 Attempt to add the last backup db volume used entry back in to the volume history was unsuccessful.

Explanation

Restore db operation was successful however the attempt to add the last backup db volume used back in to the volume history failed.

System action

The database restore operation is successful. Entry for last backup db volume used in the operation might be missing from volume history.

User response

Keep a copy of the volume history file that was used to do the restore operation. After you have verified the restore db operation do a backup db type=full. Manually track the volume that was not added back in to the volume history.

ANR29 Database 89E Database Name backup failed - Missing volume history file.

Explanation

Backup DB failed due to volume history file is not defined in the dmserv.opt.

System action

None.

User response

Correct the problem in dmserv.opt file and retry.

ANR29 Database 90E restore is terminated due to an invalid database path sqlerrmc and Db2 sqlcode sqlcode

Explanation

Db2 detected invalid database path.

System action

The database restore is terminated.

User response

Ensure the path exists and permissions are

correct and issue restore DB command again or issue restore DB command again with ON parameter to specify a new valid database storage path.

ANR29 The Incremental 91E Database backup was terminated because a full database backup is required - Db2 sqlcode sqlcode sqlerrmc sqlerrmc.

Explanation

The Incremental Database backup was terminated. A FULL database backup is required before an Incremental Database backup can be completed.

System action

The incremental database backup is terminated.

User response

Complete a FULL database backup first, then retry the incremental database backup.

ANR29 The database 92W uses database space used megabytes of file-system space. The amount of available file-system space is database space available megabytes. The ratio is database

file system used ratio.

Explanation

The ratio exceeds the threshold for database space utilization.

System action

System operations might be restricted because of limited database space.

User response

To increase the space for the database, use the EXTEND DBSPACE command.

ANR29 The database 93E backup terminated with a log problem. Db2 sqlcode: sqlcode. Db2 sqlerrmc: sqlerrmc.

Explanation

The database backup was terminated by Db2 because one or more of the log files needed could not be retrieved.

System action

The database backup is terminated.

User response

If the message did not indicate which log directory path caused the problem, look in the db2diag.log for additional information. Common problems are a missing directory or permission denied.

ANR29 The automatic 94E database

backup was terminated.

Explanation

The operation was terminated because the device class that is used for the automatic database backup is not defined.

System action

The automatic database backup is terminated.

User response

Issue the SET DBRECOVERY command to define the device class for the automatic database backup.

ANR29 Command: 95E Device class device class name is used for the automatic database backup.

Explanation

The DELETE DEVCLASS command was issued to delete a device class that is in use for the automatic database backup.

System action

The server does not process the command.

User response

Issue the SET DBRECOVERY command to define a new device class for automatic database backup before deleting this device class.

ANR29 The server log is 96I log full percentage percent full. The

server is no longer delaying transactions.

Explanation

The server log utilization was dangerously high and the server was delaying transactions. The log utilization is now at a lower level and the server is no longer delaying transactions.

System action

Server processing continues.

User response

Continue to monitor server activity and log usage. If log usage is low enough, you may consider reducing the amount of space allocated to the log.

ANR29 97W The server log is *log full percentage percent full*. The server will delay transactions by *delay time milliseconds*.

Explanation

The server log utilization is very high. In order to prevent the server log from becoming full, the server will begin delaying transactions by the specified amount of time.

System action

Server processing continues.

User response

Monitor server activity and log usage. If possible, delay adding new work to the server load.

ANR29 98I When storage rule *stgrule_name* is processed, the operation will reclaim *reclaimable_cntr*s containers, reading and writing *moved_bytes*, and saving *saved_bytes* of space.

Explanation

The reclamation process will proceed based on the settings that you specified in the storage rule.

System action

Server operation continues.

User response

No action is required.

ANR30 00E Command can only be issued on a configuration manager.

Explanation

The *command* can only be issued on a server that is a configuration manager.

System action

Server operation continues. The command is not processed.

User response

Issue this command from a configuration manager.

ANR30 01E Command can only be issued on a managed server.

Explanation

The *command* can only be issued on a managed server.

System action

Server operation continues. The command is not processed.

User response

Issue this command from a managed server.

ANR30 02E Command: Profile name exceeds *maximum length* characters.

Explanation

The profile name specified in the *command* is longer than the maximum length allowed.

System action

Server operation continues. The command is not processed.

User response

Select a profile name that does not exceed the maximum length.

ANR30 03E Command: Profile description exceeds *maximum length* characters.

Explanation

The profile description specified in the *command* is longer than the maximum length allowed.

System action

Server operation continues. The command is not processed.

User response

Select a description that does not exceed the maximum length.

ANR30 04E Command: The configuration manager name exceeds *maximum length* characters.

Explanation

The configuration manager name specified in the *command* is longer than the maximum length allowed.

System action

Server operation continues. The command is not processed.

User response

Select a configuration manager name that does not exceed the maximum length.

ANR30 05E Command: The server name exceeds *maximum length* characters.

Explanation

The configuration manager name specified in the *command* is longer

than the maximum length allowed.

System action

Server operation continues. The command is not processed.

User response

Select a configuration manager name that does not exceed the maximum length.

ANR30 Command: The 06E configuration refresh interval value must be between minimum value and maximum value.

Explanation

The specified command has been issued with an invalid refresh interval.

System action

Server operation continues. The command is not processed.

User response

Issue the command and specify a valid refresh interval value.

ANR30 Command: The 07E option option must be specified.

Explanation

When the command is issued on a server that is neither a configuration manager nor a managed server, the specified option must be supplied.

System action

Server operation continues. The command is not processed.

User response

Reissue the command with the specified option.

ANR30 Database 08I backup was written using client API: API information.

Explanation

The database backup was written using the indicated IBM Storage Protect Backup/Archive API.

System action

Database restore processing continues.

User response

This information will be used during the database restore operation. If the API used during the restore is not compatible, additional messages will be issued and the operation will fail.

ANR30 Database 09E restore not possible, client API is not compatible: API information.

Explanation

The IBM Storage Protect client API version being used for this database restore operation is not compatible with the version used to write the database backup.

System action

Database restore processing terminates.

User response

Install a newer version of the IBM Storage Protect client API and retry this database restore operation. The client API version currently available and used for this database restore operation is not compatible with what was used to originally write the database backup.

ANR30 This command 10W will delete an object that is associated with one or more profiles on a configuration manager. Subsequent configuration refresh processing will delete the object on managed servers that subscribe to a profile with which the object is associated.

Explanation

A command has been entered that will delete an object from a configuration manager. Since this object is associated with one or more profiles on a configuration manager, configuration refresh processing will delete this object on subscribing managed servers.

System action

The system asks whether you wish to continue with the command.

User response

To process the command, enter 'Y' to continue or 'N' to stop the process.

ANR30 command: 11E Subscription for profile *profile name* was not deleted because one or more objects could not be discarded.

Explanation

This message was issued because one or more objects could not be discarded by the indicated command. A previous message gives an explanation for each object that could not be discarded.

System action

The system may discard some of the managed objects that are associated with profile *profile name*. The subscription itself is not deleted.

User response

Examine previous messages to determine the action that must be taken before remaining objects can be discarded. Alternatively, you can delete the subscription without using the DISCARDOBJECTS=YES option.

ANR30 command: 12I Configuration

manager state set to state.

Explanation

The command has successfully set the configuration manager state.

System action

The command succeeded.

User response

None.

ANR30 command: 13W Configuration manager state already set to state.

Explanation

The specified state is already in force on the server.

System action

Server operation continues. The command is not processed.

User response

This server is already set to the specified state. If the state should be set differently, reissue the command specifying the new state value.

ANR30 command: One 14E or more subscriptions still exist.

Explanation

A configuration manager state cannot be set to OFF is one or more subscription still exist. The server still has a record of one or

more subscriptions to its profiles.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SUBSCRIBERS command to determine which subscriptions still exist. The DELETE SUBSCRIBER command can be used to remove the record of these subscriptions. You may instead want to delete the actual subscription(s) on the managed server(s). When there are no more subscriptions recorded on the configuration manager, you must then delete all the profiles. Once the profiles have been deleted, you can reissue the command.

ANR30 command: One 15E or more profiles still exist.

Explanation

A configuration manager state cannot be set to OFF is one or more profiles still exist.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFILE command to determine which profiles still exist on the configuration manager then use the DELETE PROFILE command. After all

the profiles have been deleted, reissue the command.

ANR30 command: 16I Configuration refresh interval set to interval.

Explanation

The command has successfully set the configuration refresh interval to the specified value. Automatic configuration refresh processing will immediately be attempted and then will again be performed after the specified number of minutes of elapsed.

System action

The command succeeded.

User response

None.

ANR30 command: 17I Profile profile name defined.

Explanation

The command has successfully define a profile.

System action

The command succeeded.

User response

None.

ANR30 command: 18E Profile profile name already exists.

Explanation

The profile specified already exists on the configuration manager.

System action

Server operation continues. The command is not processed.

User response

Decide on another profile name and reissue the command.

ANR30 command: 19I Profile profile name updated.

Explanation

The command has successfully updated a profile.

System action

The command succeeded.

User response

None.

ANR30 command: 20E Profile profile name not found.

Explanation

The profile specified could not be found.

System action

Server operation continues. The command is not processed.

User response

Check to see if the profile name was specified correctly on the command. Use the QUERY PROFILE

command to check to see if the profile exists on the configuration manager. Reissue the command with the correct profile name.

ANR30 command:
21I Profile profile name copied to profile profile name.

Explanation

The command has successfully copied the first profile to the newly created second profile. All the profile associations were also copied.

System action

The command succeeded.

User response

None.

ANR30 command: The
22E profile lock timeout interval value must be between minimum value and maximum value.

Explanation

The specified command has been issued with an invalid lock timeout interval.

System action

Server operation continues. The command is not processed.

User response

Issue the command and specify a valid lock timeout interval value.

ANR30 command:
23I Profile profile name locked.

Explanation

The command has successfully locked the profile. No configuration information can be propagated to the subscribers of the profile until it is unlocked.

System action

The command succeeded.

User response

None.

ANR30 command:
24W Profile profile already locked with timeout interval greater than interval.

Explanation

An attempt was made to lock the specified profile. The profile is already locked with a timeout interval greater than the value specified.

System action

The profile remains locked with the original timeout interval.

User response

If you want to lower the timeout interval, unlock the profile and then lock the profile again specifying the lower value.

ANR30 command:
25I Profile profile name unlocked.

Explanation

The command has successfully unlocked the profile. Configuration information can now be propagated to the subscribers of the profile.

System action

The command succeeded.

User response

None.

ANR30 command:
26I Profile profile name deleted.

Explanation

The command has successfully deleted the profile from the configuration manager.

System action

The command succeeded.

User response

None.

ANR30 command: One
27E or more subscriptions still exist to profile profile name.

Explanation

An attempt was made to delete a profile that still has subscriptions defined on one or more managed servers. The configuration manager still has a record of one or more subscriptions to the profiles.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SUBSCRIBERS command to determine which subscriptions still exist. Use the DELETE SUBSCRIPTION command on the managed server(s) to delete the subscriptions, and then reissue the DELETE PROFILE command on the configuration manager. Alternatively, the FORCE=YES option can be used on the DELETE PROFILE command to delete the profile even if there are subscriptions to the profile. In this case, messages will be issued when the managed server requests updates for that profile, informing the managed server that the profile has been deleted.

ANR30 command:
28E Profile profile name is locked.

Explanation

The specified command cannot be performed on a locked profile.

System action

Server operation continues. The command is not processed.

User response

Unlock the profile using the UNLOCK PROFILE command and then reissue the command.

ANR30 29I Reorganization for table *table name* canceled.

Explanation

Based on the DISABLEREORGTABLE server option, table reorganization is disabled for table that is referenced and a paused reorganization is canceled.

System action

The reorganization is canceled.

User response

If the intention is to disable table reorganization for table that is referenced, then no further action is required, otherwise consider updating the DISABLEREORGTABLE server option.

ANR30 30I *command:* Subscription defined for profile *profile name*.

Explanation

The command has successfully defined a subscription to the specified profile. A refresh of the configuration information has been initiated.

System action

The command succeeded.

User response

None.

ANR30 31W *command:* Subscription for

profile profile name already exists.

Explanation

A subscription already exists for the specified profile.

System action

Server operation continues. The command is not processed.

User response

Check to make sure you specified the correction profile name, and reissue the command if needed.

ANR30 32E *command:* Server name not specified.

Explanation

A server name must be specified on this command using the SERVER= parameter. This identifies the configuration manager.

System action

Server operation continues. The command is not processed.

User response

Reissue the command and specify a server name.

ANR30 33E *command:* Server *server* is not the managed server's configuration manager.

Explanation

A server name was specified on the command which does not match the current configuration manager. A managed server may only have one configuration manager.

System action

Server operation continues. The command is not processed.

User response

Reissue the command and leave off the server parameter. It will default to use the current configuration manager. A QUERY SUBSCRIPTION will display the configuration manager currently in use.

ANR30 34E *command:* Server *server* cannot be used as this server's configuration manager.

Explanation

A server name was specified on the command which cannot be used as a configuration manager.

System action

Server operation continues. The command is not processed.

User response

Find out the correct name for the configuration manager and then reissue the command.

ANR30 35I *command:* Subscriber

subscriber name deleted.

Explanation

The command has successfully deleted a subscriber from the record kept in the configuration manager. If the subscriber (managed server) still has a subscription to a valid profile, the record of the subscription will reappear when it performs its next configuration refresh.

System action

The command succeeded.

User response

None.

ANR30 36E *command:* Subscriber *subscriber name* not found.

Explanation

The specified subscriber name was not found in the configuration manager's records as being a valid subscriber of any profiles.

System action

Server operation continues. The command is not processed.

User response

Check to see that the subscriber (managed server) name is correction. If you think the name is correct, perhaps the managed server has not yet successfully contacted the configuration

manager to inform it that the subscription exists.

ANR30 command:
37I Subscription deleted for profile *profile name*.

Explanation

The command has successfully deleted a subscription for the specified profile. A refresh of the configuration information has been initiated.

System action

The command succeeded.

User response

None.

ANR30 command:
38E Subscription for profile *profile name* not found.

Explanation

A subscription was not found for the specified profile.

System action

Server operation continues. The command is not processed.

User response

Check to see that the profile name was specified correctly. Issue the QUERY SUBSCRIPTION command to check to see which profiles have subscriptions. Reissue the command with the correct profile name.

ANR30 command: No matching administrators found in configuration.
39E

Explanation

No administrator definitions were found on the configuration manager that match the admin(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY ADMIN command to check which administrators that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 command: All administrators associated with profile *profile name*.
40I

Explanation

The command has successfully associated all the administrators with the specified profile. All administrator definitions will be automatically propagated to managed servers which subscribe to the profile. If an administrator is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 command:
41I Administrator admin associated with profile *profile name*.

Explanation

The command has successfully associated the administrator with the specified profile. The administrator definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 command: No additional administrators associated with profile *profile name*.
42W

Explanation

No additional administrator were associated with the profile. The administrator(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY ADMIN command to check which administrators are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which administrators are already associated with the profile.

ANR30 command: No matching domains found in configuration.
43E

Explanation

No domain definitions were found on the configuration manager that match the domain(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY DOMAIN command to check which domains that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 command: All domains associated with profile *profile name*.
44I

Explanation

The command has successfully associated all the domains with the specified profile.

All domain definitions will be automatically propagated to managed servers which subscribe to the profile. If a domain is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 45I *command: Domain domain associated with profile profilename.*

Explanation

The command has successfully associated the domain with the specified profile. The domain definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 46W *command: No additional domains associated with profile profilename.*

Explanation

No additional domains were associated with the

profile. The domain(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY DOMAIN command to check which domains are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which domains are already associated with the profile.

ANR30 47E *command: No matching admin schedules found in configuration.*

Explanation

No admin schedule definitions were found on the configuration manager that match the admin schedule(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SCHEDULE TYPE=ADMIN command to check which admin schedules are defined on the server and then reissue to DEFINE

PROFASSOCIATION command.

ANR30 48I *command: All admin schedules associated with profile profilename.*

Explanation

The command has successfully associated all the admin schedules with the specified profile. All admin schedule definitions will be automatically propagated to managed servers which subscribe to the profile. If an admin schedule is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 49I *command: Admin Schedule admin schedule associated with profile profilename.*

Explanation

The command has successfully associated the admin schedule with the specified profile. The admin schedule definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 50W *command: No additional admin schedules associated with profile profilename.*

Explanation

No additional admin schedules were associated with the profile. The admin schedule(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SCHEDULE TYPE=ADMIN command to check which admin schedules are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which admin schedules are already associated with the profile.

ANR30 51E *command: No matching scripts found in configuration.*

Explanation

No script definitions were found on the

configuration manager that match the script(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SCRIPT command to check which scripts that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 command: All 52I scripts associated with profile profilename.

Explanation

The command has successfully associated all the scripts with the specified profile. All script definitions will be automatically propagated to managed servers which subscribe to the profile. If a script is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 command: 53I Script script associated with profile profilename.

Explanation

The command has successfully associated the script with the specified profile. The script definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 command: No 54W additional scripts associated with profile profilename.

Explanation

No additional scripts were associated with the profile. The script(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SCRIPT command to check which scripts are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which scripts are already associated with the profile.

ANR30 command: No 55E matching client option sets found in configuration.

Explanation

No client option set definitions were found on the configuration manager that match the client option set(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY CLOPTSET command to check which client option sets that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 command: All 56I client option sets associated with profile profilename.

Explanation

The command has successfully associated all the client option sets with the specified profile. All client option set definitions will be automatically propagated to managed servers which subscribe to the profile. If a client option set is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 command: 57I Client option set client option set associated with profile profilename.

Explanation

The command has successfully associated the client option set with the specified profile. The client option set definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 command: No 58W additional client option sets associated with profile profilename.

Explanation

No additional client option sets were associated with the profile. The client option set(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY CLOPTSET command to check which client option sets are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which client option sets are already associated with the profile.

ANR30 59E command: No matching servers found in configuration.

Explanation

No server definitions were found on the configuration manager that match the server(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SERVER command to check which servers that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 60I command: All servers associated with profile profilename.

Explanation

The command has successfully associated all the servers with

the specified profile. All server definitions will be automatically propagated to managed servers which subscribe to the profile. If a server is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 61I command: Server server associated with profile profilename.

Explanation

The command has successfully associated the server with the specified profile. The server definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 62W command: No additional servers associated with profile profilename.

Explanation

No additional servers were associated with the profile. The server(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SERVER command to check which servers are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which servers are already associated with the profile.

ANR30 63E command: No matching server groups found in configuration.

Explanation

No server group definitions were found on the configuration manager that match the server group(s) specified on the DEFINE PROFASSOCIATION command.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SERVERGROUP command to check which server

groups that are defined on the server and then reissue to DEFINE PROFASSOCIATION command.

ANR30 64I command: All server groups associated with profile profilename.

Explanation

The command has successfully associated all the server groups with the specified profile. All server group definitions will be automatically propagated to managed servers which subscribe to the profile. If a server group is added to the configuration manager in the future, its definition will also be automatically propagated to the managed servers.

System action

The command succeeded.

User response

None.

ANR30 65I command: Server group server group associated with profile profilename.

Explanation

The command has successfully associated the server group with the specified profile. The server group definition will be automatically propagated to managed servers which subscribe to the profile.

System action

The command succeeded.

User response

None.

ANR30 66W command: No additional server groups associated with profile *profilename*.

Explanation

No additional server groups were associated with the profile. The server group(s) specified are already associated with the profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY SERVERGROUP command to check which server groups are defined on the server and then reissue to DEFINE PROFASSOCIATION command. The QUERY PROFASSOCIATION FORMAT=DETAILED can be used to see which server groups are already associated with the profile.

ANR30 67E command: No matching administrators associated with profile *profile*.

Explanation

No matching administrator definitions

are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which administrators are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 68I command: All administrator associations deleted from profile *profilename*.

Explanation

The command has successfully deleted all administrators associations from the specified profile. This will automatically delete these administrators from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 69I command: Administrator association *admin* deleted from profile *profilename*.

Explanation

The command has successfully deleted an administrator association from the specified profile. This will automatically delete this administrator from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 70E command: No matching domains associated with profile *profile*.

Explanation

No matching domain definitions are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which domains are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 71I command: All domain associations deleted from profile *profilename*.

Explanation

The command has successfully deleted all domains associations from the specified profile. This will automatically delete these domains from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 72I command: Domain association *domain* deleted from profile *profilename*.

Explanation

The command has successfully deleted a domain association from the specified profile. This will automatically delete this domain from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 73E command: No matching admin schedules associated with profile *profile*.

Explanation

No matching admin schedule definitions are

associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which admin schedules are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 command: All 74I admin schedule associations deleted from profile profilename.

Explanation

The command has successfully deleted all admin schedules associations from the specified profile. This will automatically delete these admin schedules from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 command: 75I Admin schedule association admin schedule deleted from profile profilename.

Explanation

The command has successfully deleted an admin schedule association from the specified profile. This will automatically delete this admin schedule from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 command: No 76E matching scripts associated with profile profile.

Explanation

No matching script definitions are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which scripts are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 command: All 77I script associations deleted from profile profilename.

Explanation

The command has successfully deleted all scripts associations from the specified profile. This will automatically delete these scripts from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 command: 78I Script association script deleted from profile profilename.

Explanation

The command has successfully deleted a script association from the specified profile. This will automatically delete this script from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 command: No 79E matching client option sets associated with profile profile.

Explanation

No matching client option set definitions are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which client option sets are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 command: All 80I client option set associations deleted from profile profilename.

Explanation

The command has successfully deleted all client option sets associations from the specified profile. This will automatically delete these client option sets from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 command: 81I Client option set association client option set deleted from profile profilename.

Explanation

The command has successfully deleted

a client option set association from the specified profile. This will automatically delete this client option set from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 82E command: No matching servers associated with profile *profile*.

Explanation

No matching server definitions are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which servers are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 83I command: All server associations deleted from profile *profilename*.

Explanation

The command has successfully deleted all servers associations from the specified profile. This

will automatically delete these servers from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 84I command: Server association server deleted from profile *profilename*.

Explanation

The command has successfully deleted a server association from the specified profile. This will automatically delete this server definition from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 85E command: No matching server groups associated with profile *profile*.

Explanation

No matching server group definitions are associated with the specified profile.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFASSOCIATION command to check which server groups are associated with the profile and then reissue to DELETE PROFASSOCIATION command.

ANR30 86I command: All server group associations deleted from profile *profilename*.

Explanation

The command has successfully deleted all server groups associations from the specified profile. This will automatically delete these server groups from the managed servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 87I command: Server group association server group deleted from profile *profilename*.

Explanation

The command has successfully deleted a server group association from the specified profile. This will automatically delete this server group from the managed

servers that are subscribed to this profile.

System action

The command succeeded.

User response

None.

ANR30 88W This command will cause the deletion of objects on any managed server subscribed to profile *profile name*.

Explanation

A DELETE PROFASSOCIATION command option has been entered. This action will not only delete the association from the profile, but it will also result in the deletion of managed object(s) on any managed server subscribing to this profile. The deletion of these objects will occur during the next configuration refresh for that managed server.

System action

The system asks whether you wish to continue with the command.

User response

To process the DELETE PROFASSOCIATION command, enter 'Y' to continue or 'N' to stop the command.

ANR30 89E command: Command failed - Server-to-server communication

**error with
server *server*
name.**

Explanation

The specified command failed while attempting to communicate with the indicated server.

System action

Server operation continues. The command is not processed.

User response

Verify that the indicated server name is correctly defined. Try reissuing the command. Use the server PING command to see if the other server is up. If the problem persists, consult with your network administrator.

**ANR30 command:
90E Server *server*
name is not a
configuration
manager.**

Explanation

The specified command failed because it tried to contact the specified server, and discovered that the server is not a configuration manager.

System action

Server operation continues. The command is not processed.

User response

Reissue the command and specify a correct configuration manager name.

**ANR30 Command: One
91I or more storage**

**rules exist for
storage pool
storage pool
name.**

Explanation

One or more storage rules exist for the storage pool.

System action

The server does not process the command.

User response

Issue the QUERY STGRULE command to identify the storage rule and the associated storage pool. Then, issue the UPDATE STGRULE command or the DELETE STGRULE command to remove the storage rule for the storage pool.

**ANR30 command:
92I Subscriber
notification
processing has
begun.**

Explanation

A NOTIFY SUBSCRIBER process has begun. The managed server(s) are being contacted, asking them to immediately perform a configuration refresh.

System action

Server operation continues. The command succeeded.

User response

None.

**ANR30 command: No
93I matching
profiles or
subscriptions
were found.**

Explanation

No subscriptions were found for the profiles specified. Either the profiles do not exist, or there are no subscriptions to the profiles.

System action

Server operation continues. The command is not processed.

User response

Use the QUERY PROFILE and QUERY SUBSCRIBER command to determine which profiles exist and which profiles have subscribers. Reissue the command specifying the correct profile name(s).

**ANR30 The
94E distinguished
name "DN" that
is specified in
the LDAPURL
option does not
exist on the
LDAP directory
server.**

Explanation

The distinguished name (DN) that is specified in the LDAPURL server option is not found on the LDAP directory server.

System action

Server operations continue. LDAP directory services are not available.

User response

Create the directory entry that is associated with the DN, specify a DN in the LDAPURL that already exists, or specify another directory server

that contains the DN that is defined in the LDAPURL server option. Choose one of these options and restart the IBM Storage Protect server.

**ANR30 Failure updating
95W the database
volume history
information
with the
volumes used to
perform this
restore
operation.**

Explanation

At the end of database restore processing for a point in time operation, the server database will be updated to show the volumes that were used to restore the database. This is done so that a future restore has knowledge of this database backup and will be able to use this if it is the best possible candidate for a future operation. Because the server failed to update this information, a future restore database operation may not select the best possible database backup to use for the operation.

System action

Database restore processing completes.

User response

Once the server is restarted after the database restore is completed, a BACKUP DB TYPE=FULL should be performed as soon as possible and the volume history information backed up

after this backup is completed. This will set a new best possible restore point if a future restore operation is needed. If you use the Disaster Recovery Manager feature to track database backup volume physical location you will have to manually track the location of the database backup volumes which were not updated.

ANR30 96I The volumes used to perform this restore operation were successfully recorded in the server volume history.

Explanation

At the end of database restore processing for a point in time operation, the server database will be updated to show the volumes that were used to restore the database. This is done so that a future restore has knowledge of this database backup and will be able to use this if it is the best possible candidate for a future operation.

System action

Database restore processing completes.

User response

None.

ANR30 97W LDAPUSER must be set before you can use LDAP password authentication.

Explanation

The LDAPURL server option is set, however LDAP password authentication cannot complete until LDAPUSER and LDAPPASSWORD are set.

System action

Server operations continue without LDAP authentication.

User response

Issue the SET LDAPUSER and SET LDAPPASSWORD commands, in that order.

ANR30 98W LDAPPASSWORD must be set before you can use LDAP password authentication.

Explanation

The LDAPURL server option is set, however LDAP password authentication cannot complete until the LDAPUSER and LDAPPASSWORD are set.

System action

Server operations continue without LDAP authentication.

User response

Issue the SET LDAPPASSWORD command.

ANR30 99E The distinguished name "DN" specified in the LDAPURL option does not have the proper syntax.

Explanation

The distinguished name (DN) in the LDAPURL server option does not have the proper syntax. The LDAP URL must use the RFC 2255 format with the restriction that the LDAPURL server option can only contain ASCII characters. The DN must conform to the requirements of the directory server. Directory servers typically support RFC 2253 or 4514 for the DN format.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option and restart the IBM Storage Protect server.

ANR31 00I Initializing LDAP directory services.

Explanation

The server started the initialization process with the LDAP directory server.

System action

Server operations continue.

User response

None.

ANR31 01I Successfully initialized LDAP directory services.

Explanation

The server was successfully configured to use LDAP directory services.

System action

Server operations continue and LDAP directory services are available.

User response

None.

ANR31 02E An authentication failure occurred during LDAP directory services initialization as user LDAP user.

Explanation

The LDAPUSER value or the LDAPPASSWORD value, or both, are incorrect.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the values for the LDAP user and LDAP password by issuing the SET LDAPUSER and SET LDAPPASSWORD commands. After you issue these commands, LDAP directory services initialization is attempted.

ANR31 03E Failure occurred while initializing LDAP directory services.

Explanation

An error occurred while the server initialized LDAP directory services.

System action

Server operations continue. LDAP directory services are not available.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log file and search for messages. Check for network problems. Check for problems with the certificate used by the directory server or the key database containing the certificates. Check the access rights of the LDAPUSER. Check the status of the directory server and examine the log files provided by the directory server. Use LDAP utilities such as ldapsearch or ldap to isolate the problem.

If the LDAPURL server option is incorrect, restart the server after correcting the error. If the LDAPUSER or LDAPPASSWORD values are incorrect, use the SET LDAPUSER and/or SET LDAPPASSWORD commands to try initializing LDAP directory services again.

ANR31 The LDAP 04E directory service is not successfully configured.

Explanation

The IBM Storage Protect server must be configured correctly in order to use LDAP directory services, before accounts can be placed in the LDAP directory server to authenticate access requests.

System action

Server operations continue. LDAP directory services are not available.

User response

To configure LDAP directory services, set the LDAPURL server option, add the appropriate certificate to the IBM Storage Protect server key database, and issue the SET LDAPUSER and SET LDAPPASSWORD commands. The LDAP password (LDAPPASSWORD) must match the password for the user (LDAPUSER) that can conduct IBM Storage Protect administrative operations when accessing the LDAP directory server.

If the IBM Storage Protect server is already configured to use LDAP directory services, an authentication failure might have occurred or another error might have occurred during configuration. Examine the server messages that were issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages.

ANR31 The LDAP 05E directory service was not found by using Domain Name System (DNS).

Explanation

An LDAP directory server could not be located using the system's current DNS server configuration and DNS suffix search list.

System action

Server operations continue. LDAP directory services are not available.

User response

Check the system's DNS configuration, the status of the DNS servers, the DNS server log files, and the DNS server configuration. Verify that the DNS server configuration complies with RFCs 2052, 2219, or 2782.

ANR31 Failed to parse 06E the LDAPURL option value LDAP URL.

Explanation

The LDAPURL server option value cannot be parsed. The LDAP URL must use the RFC 2255 format with the restriction that the LDAPURL server option contain only ASCII characters.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option value and restart the server.

ANR31 The sum total of 07I all MAXPROC values for storage rule stgrule and the associated subrules, maxproc, is greater than the number of available drives (num drives) for storage pool tgt pool. num drives processes will be created.

Explanation

The MAXPROC parameter was specified with a value that is greater than the number of available drives.

System action

Processing continues. Fewer processes will be created to match the number of available drives.

User response

No action is required.

ANR31 The 08E distinguished name is missing from the LDAPURL server option value LDAP URL.

Explanation

The distinguished name (DN) is required as part of the LDAPURL server option. When updating the LDAP URL

information, use the RFC 2255 format.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option value and restart the IBM Storage Protect server.

ANR31 09E The LDAPURL server option value *LDAP URL* does not contain a host address and cannot be used because another LDAPURL option value specifies a host address.

Explanation

You cannot have multiple LDAPURL server option values if one of the values does not specify a host address.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option value and restart the IBM Storage Protect server.

ANR31 10E The distinguished names "DN" and "DN" specified with the LDAPURL server option do not match.

Explanation

The distinguished names (DN) specified on each LDAPURL server option value must be the same.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option value and restart the IBM Storage Protect server.

ANR31 11E The LDAPURL server option value *LDAP URL* is missing the *ldap://* prefix.

Explanation

When updating the LDAP URL information, use the RFC 2255 format.

System action

Server operations continue. LDAP directory services are not available.

User response

Use the standard *ldap://* scheme prefix for the LDAPURL server option and restart the IBM Storage Protect server.

ANR31 12E The password cannot be reset, the LDAP directory server requires you to provide the current password.

Explanation

The LDAP directory server requires that the

user who is specified in the SET LDAPUSER command provide the current password when changing another user's password. The LDAPUSER needs to be able to reset passwords to allow IBM Storage Protect administrators to reset passwords for IBM Storage Protect nodes and administrators.

System action

Server operation fails.

User response

Change the password policy or permission settings on the LDAP directory server to allow the user who is specified in the SET LDAPUSER command to change passwords for LDAP users who are managed by the IBM Storage Protect server.

ANR31 13E The password cannot be added or changed, the LDAP user does not have sufficient access rights to add or change the password.

Explanation

If the current password was not provided for the operation, a password reset is performed on the LDAP directory server by the user specified in the SET LDAPUSER command. If the current password was provided for the operation, for example, in the SET PASSWORD client command, the

user's password is changed on the LDAP directory server by the user. However, if the user's password expired, preventing access to the directory server, the password is changed by the user specified in the SET LDAPUSER command.

System action

Server operation fails.

User response

Change the password policy and access rights on the LDAP directory server to allow users to change their own passwords, and to allow the user specified in the SET LDAPUSER command to add or reset passwords for the users that are being managed by the IBM Storage Protect server.

ANR31 14E LDAP error code (error description) occurred during operation.

Explanation

The LDAP operation failed with an unexpected error.

System action

The server operation fails. If this message is displayed during server initialization, LDAP directory services are not available.

User response

Examine the server messages issued around the same time as this

message to determine the cause and impact of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. Check the status of the LDAP directory server and examine its log files. Use LDAP utilities such as ldapsearch or ldp to isolate the problem.

ANR31 15E The LDAP directory server returned the following error message (LDAP server message) with the LDAP error.

Explanation

The LDAP directory server returned an error message associated with an LDAP error that occurred, providing additional information to assist in determining the cause of the problem.

System action

The server operation fails.

User response

Examine the server messages issued around the same time as this message to determine the cause and impact of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. Check the status of the LDAP directory server and examine its log files. Use LDAP utilities such as ldapsearch or ldp to isolate the problem.

ANR31 16E LDAP SSL/TLS error GSKIT error code (error description) occurred during operation.

Explanation

An SSL/TLS error code was reported by the GSKIT component along with the LDAP error that occurred.

System action

The server operation fails.

User response

Examine the server messages issued around the same time as this message to determine the cause and impact of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. Check for network problems. Check for problems with the certificate used by the LDAP directory server or the key database containing the certificates. Check the status of the LDAP directory server and examine its log files. Use LDAP utilities such as ldapsearch or ldp to isolate the problem using a TLS connection to the LDAP server.

ANR31 17E Session session number for node or administrator node/admin name (client platform) refused - the level of the client does not meet the minimum required level

for LDAP authentication.

Explanation

The server refuses the client session because the client program version level is not 6.4 or later. Only version 6.4 and later clients can use LDAP authentication.

System action

The session is refused and server operations continue.

User response

Upgrade the client program to at least version 6.4 or do not use LDAP authentication to make it compatible with the newer server program.

ANR31 18I The LDAP entry for node node name was deleted.

Explanation

An inconsistency between the database of the IBM Storage Protect server database and the LDAP directory server was found during AUDIT LDAPDIRECTORY command processing. Because you specified FIX=YES, the LDAP entry for the node was deleted to correct this inconsistency.

System action

Server operations continue.

User response

None.

ANR31 19I The LDAP entry for administrator admin name was deleted.

Explanation

An inconsistency between the database of the IBM Storage Protect server database and the LDAP directory server was found during AUDIT LDAPDIRECTORY command processing. Because you specified FIX=YES, the LDAP entry for the administrator was deleted to correct this inconsistency.

System action

Server operations continue.

User response

None.

ANR31 20I The administrator admin name was updated because the parameter parameter for a node with the same name was changed.

Explanation

Values for the AUTHENTICATION and SSLREQUIRED parameters must be the same for nodes and administrators that share the same name. If values for either the node or the administrator changed, the administrator or node sharing the same name will be updated to keep these parameters the same.

If the AUTHENTICATION parameter changed from LDAP to LOCAL, the password was also updated. When this happens, the password is updated to the same password that is used for the node.

System action

The server updated the AUTHENTICATION or SSLREQUIRED parameter of the specified administrator.

User response

None.

ANR31 21I The node *node name* was updated because the *parameter* parameter for an administrator with the same name was changed.

Explanation

Values for the AUTHENTICATION and SSLREQUIRED parameters must be the same for nodes and administrators that share the same name. If values for either the node or the administrator changed, the node or administrator sharing the same name will be updated to keep these parameters the same.

If the AUTHENTICATION parameter changed from LDAP to LOCAL, the password was also updated. When this happens, the password is updated to the same

password that is used for the administrator.

System action

The server updated the AUTHENTICATION or SSLREQUIRED parameter of the specified node.

User response

None.

ANR31 22E *command:* System level authority is required because the server needs to update a node or administrator that shares the same name.

Explanation

Values for the AUTHENTICATION and SSLREQUIRED parameters must be the same for nodes and administrators that share the same name. If values for either the node or the administrator changed, the node or administrator sharing the same name will be updated to keep these parameters the same.

System action

The server fails the command.

User response

Reissue the command using an administrator that has system level authority. Alternatively, rename either the node or the administrator associated with the command such that they

do not share the same name.

ANR31 23W An LDAP entry for node *node name* was not found in the LDAP directory server.

Explanation

The REGISTER NODE command was issued with AUTHENTICATION=LDAP but without providing a password. This combination is valid. However, this combination will not create an LDAP entry, which is required to access the node.

System action

The command succeeded.

User response

An LDAP entry must be created before this node can be accessed. To create a new LDAP entry for this node issue the UPDATE NODE command and provide a password. If the LDAP directory server is shared with another IBM Storage Protect server, the LDAP entry can be created by the other IBM Storage Protect server instead.

ANR31 24W An LDAP entry for administrator *admin name* was not found in the LDAP directory server.

Explanation

The REGISTER ADMIN command

was issued with AUTHENTICATION=LDAP but without providing a password. This combination is valid. However, this combination will not create an LDAP entry, which is required to access the administrator.

System action

The command succeeded.

User response

An LDAP entry must be created before this administrator can be accessed. To create a new LDAP entry for this administrator issue the UPDATE ADMIN command and provide a password. If the LDAP directory server is shared with another IBM Storage Protect server, the LDAP entry can be created by the other IBM Storage Protect server instead.

ANR31 25I *command:* Successfully updated *successful* updates nodes out of *total* update attempts nodes that were targeted for updating.

Explanation

The command updated a node or nodes and produced summary statistics stating how many nodes were updated successfully and how many attempts were made.

System action

The command succeeded.

User response

None.

ANR31 26I *command: Successfully updated successful updates administrators out of total update attempts administrators that were targeted for updating.*

Explanation

The command updated an administrator or administrators and produced summary statistics stating how many administrators were updated successfully and how many attempts were made.

System action

The command succeeded.

User response

None.

ANR31 27W *You must change the password for "LDAP user" within number day(s).*

Explanation

The password is due to expire, and it must be changed to prevent failures.

System action

Server operations continue.

User response

Change the password on the LDAP directory server and issue the SET LDAPPASSWORD command with the new password.

ANR31 28E *Command: The number of failover servers exceeds the maximum number allowed.*

Explanation

The number failover servers that can be defined for a node is limited to one.

System action

The command fails.

User response

Reissue the command specifying only one registered server name.

ANR31 29I *Server Fail Over high level address set to address.*

Explanation

The high level address that clients use to communicate with this server during fail over has been set to the value indicated with the SET FAILOVERHLADDRESS command.

System action

The command succeeded.

User response

None.

ANR31 32W *Replication process with process Id process number from server server name, is cancelled. Replication process source process number on source server may still be active.*

Explanation

A replication process on a target replication server which was initiated on a source replication server has been cancelled.

System action

Server operation continues.

User response

Check the status of the replication process on the source server. Issue the CANCEL PROCESS command on the source server to cancel this replication operation.

ANR31 33E *command: Server server name not defined*

Explanation

The server *server name* is not defined to the system.

System action

The command proceeds however the server name is not used.

User response

Use QUERY SERVER to identify a valid failover server.

ANR31 34E *Command: The number of specified output volumes (volume count) is less than the number of streams specified in the MAXSTREAM parameter (stream count).*

Explanation

The number of specified output volumes is less than the number of streams specified in the MAXSTREAM parameter, and scratch volumes are not allowed.

System action

The command is not run.

User response

Rerun the command, specifying more output volumes or fewer streams, or specify SCRATCH=YES to allow scratch volumes to be used.

ANR31 35E *Command: The value specified for the MAXSTREAM parameter (stream count) is greater than the mount limit associated with device class device class (mount limit).*

Explanation

The value specified for the MAXSTREAM parameter is greater than the mount limit of the specified device class.

System action

The command is not run.

User response

Rerun the command, specifying fewer streams.

ANR31 Extractdb 36E command: Failed to start or failed to complete successfully.

Explanation

The database extract process was not able to start due to an error with the command specification or other validation performed prior to performing the extract. Alternatively, the extract process had started but failed to complete successfully due to an error during processing.

System action

Database extract processing did not process successfully.

User response

Review the other messages issued to determine the cause of the failure.

ANR31 Unable to reclaim 37E database storage for table space *tblspace name*. The error

code return code is returned.

Explanation

An error occurred when the database manager was trying to reclaim space in the referenced table space.

System action

The EXTEND DBSPACE operation fails. Server operation continues.

User response

Review messages on the server console and in the db2diag log to try and determine the reason for the failure. To complete the process, you will have to manually execute the steps for redistributing data and reclaiming space.

ANR31 Reclaiming 38I database storage for table space *tblspace name* is being started.

Explanation

The database manager is reclaiming storage space for the referenced table space.

System action

Server operation continues.

User response

None.

ANR31 Reclaiming 39I database storage for all table spaces is completed .

Explanation

The database manager has reclaimed space and reduced the size of all table spaces.

System action

Server operation continues.

User response

None.

ANR31 Redistribution 40I of data for database *database name* on table space *tblspace name* is complete.

Explanation

The database manager has created directories on recently added paths and has redistributed data across those paths for the referenced tablespace.

System action

Server operation continues.

User response

None.

ANR31 Redistribution 41E of data for database *database name* on table space *tblspace name* failed with error code *error code*.

Explanation

A failure occurred during the creation of directories on recently added paths or during the redistribution of data across new directories

for the referenced tablespace.

System action

The EXTEND DBSPACE operation fails. Server operation continues.

User response

Review messages on the server console and in the db2diag log to try and determine the reason for the failure. To complete the process, you will have to manually execute the steps for redistributing data and reclaiming space.

ANR31 Redistribution 42I of data for database *database name* on table space *tblspace name* is starting.

Explanation

The database manager is creating directories on newly added paths and redistributing data across all directories for the referenced table space.

System action

Server operation continues.

User response

None.

ANR31 The following 43I directory or directories have been defined in the database space: *directory list*. However, the database manager might not use new

storage paths immediately.

Explanation

The EXTEND DBSPACE operation successfully added new directories to the server database storage space. Because RECLAIM=NO was specified on the command, data is not redistributed across all directories. New storage paths might not be used until existing storage is full.

System action

Server operation continues.

User response

If you decide that you want to redistribute data and reclaim space in the database, you can manually complete the step for these tasks.

ANR31 44I Space is being added to the database as process process ID.

Explanation

An operation to add space to the database, redistribute data across all directories, and return space to the operating system is in progress.

System action

The EXTEND DBSPACE command is processed and server operation continues.

User response

Do not stop the server while this process is running and do not try to halt the process once it has started. If you want to cancel the process, use the CANCEL PROCESS command. To query the status of this process, issue QUERY PROCESS

ANR31 45E Command: Administrator admin name is currently accessing server server name.

Explanation

The command shown specifies an administrator that has an active session with the specified server.

System action

The local server does not process the command.

User response

Reissue the command at a later time, or if necessary, cancel the current administrator session and reissue the command.

ANR31 46E command name: The list of directories specified for database storage exceeds length limit characters.

Explanation

The list of directories is too long. Specify a list less than or equal to the number of characters indicated.

System action

The command stops.

User response

Consider breaking up the operation into multiple EXTEND DBSPACE commands to reduce the number of directories specified on the command.

ANR31 47I Directory(ies) directory list has been defined in the database space. Database data was distributed and balanced across existing directories.

Explanation

Command 'EXTEND DBSPACE' successfully added new directory(ies) into the server database space and balanced data across existing directories.

System action

User response

ANR31 48W Process process number, replicating with process source process number on server server name, has been inactive for minutes of inactivity minutes.

Explanation

A replication process on a target server has been inactive for a significant amount of time. It is

possible that there is a connection problem with the source replication server, or the source replication process is no longer running, or the source replication server is down.

System action

Server operation continues.

User response

Verify that the source replication server is still running. If the server is running, check that the source replication process is still active. If the source replication process is no longer active you can cancel this process.

ANR31 49I Server Fail Over high level address removed.

Explanation

The high level address that clients use to communicate with this server during fail over has been removed.

System action

The command succeeded.

User response

None.

ANR31 50E Configuration refresh failed with configuration manager server name. Will retry in minutes minutes.

Explanation

While receiving configuration information from the specified configuration manager, processing failed because of a communications error.

System action

Server operation continues. The configuration refresh process was stopped and will be automatically retried.

User response

Perhaps the configuration manager is not active. If the problem continues, contact the administrator for the configuration manager, or contact a network administrator. The refresh will automatically retry several times and then give up until the configuration refresh interval is reached again.

ANR31 Configuration 51E refresh failed with configuration manager server name.

Explanation

While receiving configuration information from the specified configuration manager, processing failed.

System action

Server operation continues. The configuration refresh process was stopped.

User response

Examine the activity log for other messages that may explain why the configuration refresh failed. The refresh will be attempted again when the configuration refresh interval is reached.

ANR31 Configuration 52I refresh started with configuration manager server name.

Explanation

Configuration refresh processing has started. A server-to-server session was opened to receive configuration information from the configuration manager. Updates will be sent for objects associated with any subscribed-to profiles.

System action

Refresh processing continues.

User response

None.

ANR31 Configuration 53I refresh ended successfully with configuration manager server name.

Explanation

Configuration refresh processing ended successfully. All updates have been made to managed objects associated with any subscribed-to profiles.

System action

Server processing continues. The next automatic refresh will start when the configuration refresh interval is reached.

User response

None.

ANR31 Communication 54E error on notify to managed server server name. Will retry in minutes minutes.

Explanation

While attempting a notify subscriber request to the specified managed server, a communications error was detected.

System action

Server operation continues. The notify subscriber request was stopped and will be automatically retried.

User response

Perhaps the managed server is not active. If the problem continues, contact the administrator for the managed server, or contact a network administrator. The notify subscriber request will automatically retry several times and then give up.

ANR31 Error 55E attempting notify subscribers request to managed server server.

System action

Server operation continues. The notify subscriber request failed.

User response

Examine the activity log for other messages that may explain why the notify subscriber request failed.

ANR31 Configuration 56E refresh failed for managed server server name.

Explanation

While sending configuration information to the specified managed server, processing failed.

System action

Server operation continues. The configuration refresh process ended.

User response

Examine the activity log of both the managed server and the configuration manager for other messages that may explain why the configuration refresh failed. The refresh will be attempted again by the managed server when its configuration refresh interval is reached.

ANR31 Configuration 57I refresh started for managed server server name.

Explanation

Configuration refresh processing has started.

A server to server session was opened by the managed server to receive configuration information from the configuration manager. Updates will be sent for objects associated with any subscribed-to profiles.

System action

Refresh processing continues.

User response

None.

ANR31 Configuration 58I refresh ended successfully for managed server server name.

Explanation

Configuration refresh processing ended successfully. All updates have been made to managed objects associated with any subscribed-to profiles on the managed server.

System action

Server processing continues.

User response

None.

ANR31 Managed server 59E server name has newer version for profile profile name.

Explanation

While sending configuration information to the specified managed server, it has been detected

that the managed server has a newer version of configuration information for the specified profile than does the configuration manager. This condition can happen if the configuration manager's database has been restored to an earlier point in time. Another possibility is that the profile was deleted on the configuration manager and a new profile by the same name was created.

System action

Server operation continues. No configuration information for this profile will be sent to the managed server until this condition is corrected.

User response

Before correcting the situation, you may want to use QUERY PROFILE to examine the profile associations defined on both the configuration manager and the managed server. To correct the situation, on the managed server delete the subscription to the profile and define the subscription again. This will cause the managed server to be refreshed at the configuration manager's current level.

ANR31 Unable to 60E receive confirmation of refresh from managed server server name.

Explanation

While sending configuration information to the specified managed server, a communication error occurred when trying to receive confirmation from the managed server that information was processed successfully.

System action

Server operation continues. Configuration refresh processing ended.

User response

Determine if communication can be established with the managed server by using the server PING command. Use the NOTIFY SUBSCRIBERS command to force the configuration refresh to retry.

ANR31 Premature end 61E of configuration refresh for managed server server server name.

Explanation

While sending configuration information to the specified managed server, processing ended prematurely because of on error.

System action

Server operation continues. Configuration refresh processing ended.

User response

Examine the activity log on the managed

server for any error messages that might explain why the refresh failed. Use the NOTIFY SUBSCRIBERS command on the configuration manager to force the configuration refresh to retry.

ANR31 Managed server 62E server name aborted configuration refresh processing due to a low memory condition.

Explanation

While sending configuration information to the specified managed server, processing ended prematurely because of a low memory condition on the managed server.

System action

Server operation continues. Configuration refresh processing ended.

User response

Make more memory available to the managed server.

ANR31 Managed server 63E server name aborted configuration refresh processing due to an internal error.

Explanation

While sending configuration information to the specified managed server, processing ended prematurely because of an internal error on the managed server.

System action

Server operation continues. Configuration refresh processing ended.

User response

Examine the activity log of the managed server for messages that explain the cause of the internal error.

ANR31 Managed server 64E *server name aborted configuration refresh processing due to a lock conflict.*

Explanation

While sending configuration information to the specified managed server, processing ended prematurely because of a lock conflict on the managed server.

System action

Server operation continues. Configuration refresh processing ended.

User response

Use the NOTIFY SUBSCRIBERS command to retry the configuration refresh. If this problem persists, contact your service representative.

ANR31 Managed server 65E *server name aborted configuration refresh processing due to a protocol error.*

Explanation

While sending configuration information to the specified managed server, processing ended prematurely because of a protocol error detected on the managed server.

System action

Server operation continues. Configuration refresh processing ended.

User response

Use the NOTIFY SUBSCRIBERS command to retry the configuration refresh. If this problem persists, contact your service representative.

ANR31 Unable to 66E *receive configuration refresh information from server server name.*

Explanation

While receiving configuration information from the specified configuration manager, processing ended prematurely because of a communications error.

System action

Server operation continues. Configuration refresh processing ended.

User response

Use the server PING command to see if the configuration manager can be reached. If the problem persists, contact your network administrator.

ANR31 Configuration 67E *manager server name aborted configuration refresh processing due to a low memory condition.*

Explanation

While receiving configuration information from the specified configuration manager, processing ended prematurely because of a low memory condition on the configuration manager.

System action

Server operation continues. Configuration refresh processing ended.

User response

Notify the administrator of the configuration manager.

ANR31 Configuration 68E *manager server name aborted configuration refresh processing due to an internal error.*

Explanation

While receiving configuration information from the specified configuration manager, processing ended prematurely because of an internal error on the configuration manager.

System action

Server operation continues. Configuration refresh processing ended.

User response

Examine the activity log of the configuration manager for messages that explain the cause of the internal error.

ANR31 Configuration 69E *manager server name aborted configuration refresh processing due to a lock conflict.*

Explanation

While receiving configuration information from the specified managed server, processing ended prematurely because of a lock conflict on the configuration manager.

System action

Server operation continues. Configuration refresh processing ended.

User response

Retry the configuration refresh by issuing the SET CONFIGREFRESH command (using the current refresh interval value). If this problem persists, contact your service representative.

ANR31 Configuration 70E *manager server name aborted configuration refresh processing due to a protocol error.*

Explanation

While receiving configuration information from the specified

configuration manager, processing ended prematurely because of a protocol error detected on the configuration manager.

System action

Server operation continues. Configuration refresh processing ended.

User response

Retry the configuration refresh by issuing the SET CONFIGREFRESH command (using the current refresh interval value). If this problem persists, contact your service representative.

ANR31 Configuration refresh with configuration manager server name had to skip processing for one or more objects.

Explanation

While receiving configuration information from the specified configuration manager, it became necessary to skip the creation or deletion of one or more objects.

System action

Server operation continues. Configuration refresh processing ended.

User response

Examine the managed server's activity log for earlier messages that identify the object, and take the actions identified in those messages. Configuration

refresh processing will not complete successfully until the problem is clear up.

ANR31 Subscription exists for deleted profile profile name.

Explanation

While receiving configuration information from the configuration manager, it has been detected that the managed server has a subscription to a profile that no longer exists on the configuration manager. This condition can exist because the profile was deleted with FORCE=YES on the configuration manager. This out-of-synch condition can also occur because one of the server's database was regressed because of a restore db.

System action

Server operation continues.

User response

The DELETE SUBSCRIPTION command is used to correct this situation. You need to decide if you want the managed objects to remain on the server. If you want them to be deleted, specify DISCARD=YES. If you want the objects to remain on the managed server as local objects, specify DISCARD=NO.

ANR31 Server has newer version for profile

profile name than the configuration manager server name.

Explanation

While receiving configuration information from the configuration manager, it has been detected that the managed server has a newer version of configuration information for the specified profile than does the configuration manager. This condition can happen if the configuration manager's database has been restored to an earlier point in time. Another possibility is that the profile was deleted on the configuration manager with FORCE=YES and a new profile by the same name was created.

System action

Server operation continues. No configuration information for this profile will be sent to the managed server until this condition is corrected.

User response

Before correcting the situation, you may want to use QUERY PROFILE to examine the profile associations defined on both the configuration manager and the managed server. To correct the situation, on the managed server delete the subscription to the profile and define the subscription again. This will cause the managed

server to be refreshed at the configuration manager's current level.

ANR31 Communication error with managed server server name.

Explanation

While receiving or sending information to the specified managed server, a communications error was experienced.

System action

Server operation continues. The operation in progress fails.

User response

If this error happens often, consult with your network administrator. Also check to see that the managed server is up.

ANR31 Profile profile name is locked and could not be refreshed from configuration manager server name.

Explanation

While receiving configuration refresh information from the specified managed server, it was detected that a subscribed-to profile is locked.

System action

Server operation continues. Refresh processings skips over this profile.

User response

Normally, the profile will later be unlocked automatically, or by an administrator. If you think that it should not be locked, have ask the configuration manager admin to unlock it using the UNLOCK PROFILE command.

ANR31 76W *Profile profile name is locked and could not be refreshed for managed server server name.*

Explanation

While sending configuration refresh information to the specified managed server, it was detected that a subscribed-to profile is locked.

System action

Server operation continues. Refresh processings skips over this profile.

User response

If the profile should no longer be locked, use the UNLOCK PROFILE command to unlock it.

ANR31 77W *Server level does not support object in profile profile name.*

Explanation

While receiving configuration refresh information from the configuration manager, an object was received that is not supported on this managed server.

System action

Server operation continues. Refresh processings skips over this object. The refresh for the profile fails.

User response

The configuration manager is at a higher release level than the managed server. The managed server subscribed to a profile that contains an unsupported object. Delete the subscription to this profile until service can be applied to the server to bring it to a higher release level.

ANR31 78E *A communication error occurred during session session number with replication server server name.*

Explanation

The communication error occurred while the system was receiving information from or sending information to the specified replication server. This error can occur on a target replication server if a CANCEL REPLICATION command is issued on the source replication server.

System action

The server is running, but the operation that was in progress failed.

User response

If this error occurs frequently, consult your

network administrator. Also review the activity log on the target and source replication servers for messages that are related to replication.

ANR31 79E *Server server name does not support replication or is not initialized for replication.*

Explanation

In response to a REPLICATE command, the server attempted to establish a connection to the replication target. But the target server does not support replication, or has not been properly initialized for replication.

System action

Server operation continues. The replication fails.

User response

Make sure the replication target is at the correct maintenance level and verify that the globally unique ID (GUID) of the target server is properly set. Use the tivguid utility to set the GUID if not properly set.

ANR31 80E *Replication cannot occur for node node name, file-space filespace name and copy type copytype name because the target replication server is not set.*

Explanation

In response to a REPLICATE NODE command, the server was unable to establish a connection to a target replication server because a target server was not defined.

System action

Replication for the node and file space is skipped. However, replication continues for other nodes and file spaces.

User response

To replicate data, the target replication server must be defined. Issue the SET REPLSERVER command to set the target replication server name. The name specified in the SET REPLSERVER command must be associated with a valid server definition.

ANR31 81E *Replication server server name has the same replication key as this server.*

Explanation

During replication initialization, the server detected that the replication key of the target server is the same as this server. Each server must have a unique replication key.

System action

Replication to the specified server is stopped.

User response

Issue the SET REPLSERVER command to specify a different server for the target of the replication.

ANR31 82W The password authentication method for node *node name* did not change.

Explanation

During replication or import processing, a node that uses an LDAP directory server to authenticate passwords at the target was detected, but the source node authenticates passwords with the IBM Storage Protect server (LOCAL). The Replication and Import process does not change the node password authentication method from LDAP to LOCAL.

System action

Replication or Import processing continues. The node password authentication method did not change from LDAP to LOCAL.

User response

Change the node password authentication method from LDAP to LOCAL by issuing the UPDATE NODE command with the AUTHENTICATION=LOCAL parameter.

ANR31 83W The password authentication method for administrator *admin name* did not change.

Explanation

During import processing, an administrator ID was detected that authenticates passwords with an LDAP directory server at the target, but with the IBM Storage Protect server (LOCAL) at the source. Import processing does not change an administrator's password authentication method from LDAP to LOCAL.

System action

Import processing continues. The password authentication method did not change from LDAP to LOCAL.

User response

You can change the password authentication method for the target administrator from LDAP to LOCAL by issuing the UPDATE ADMIN command with the AUTHENTICATION=LOCAL parameter.

ANR31 84E Server *server name* cannot replicate with this server.

Explanation

In response to a REPLICATE command, the server tried to establish a connection with the replication target. The target server is at a level that cannot support replication with this server.

System action

Server operations continue. The replication fails.

User response

Make sure that the replication target server is at a maintenance level that supports replication with this server.

ANR31 85I Replicating node *associated replication node* as a proxy agent for replicated node *reference node*

Explanation

During a REPLICATE NODE operation, the server has identified an associated proxy agent node referenced by a replicated node. The proxy agent node definition will be replicated.

System action

Server operations continue.

User response

None.

ANR31 86I Replicating node *associated replication node* which is referenced in a file space authorization rule for replicated node *reference node*

Explanation

During a REPLICATE NODE operation, the server has identified

an associated replication node that is referenced in a file space authorization rule of a replicated node. The associated replication node definition will be replicated.

System action

Server operations continue.

User response

None.

ANR31 87E Replication of associated replication node *associated replication node name* failed - the node is not configured for replication

Explanation

During a REPLICATE NODE operation, the server attempted to replicate a node that is either a proxy agent or referenced in a file space authorization rule of a replicating node. The associated replication node could not be replicated because it is not currently configured for replication. Associated replication nodes must have a replication mode set to SEND and a replication state of ENABLED in order to be replicated to a target server.

System action

The replication operation continues. The replication of the associated node fails.

User response

To use an associated replication node with a client during a failover operation configure and enable the associated replication node for replication.

ANR31 88E Replication of associated replication node associated replication node name failed - the node is not enabled for replication

Explanation

During a REPLICATE NODE operation, the server attempted to replicate a node that is either a proxy agent or referenced in a file space authorization rule of a replicating node. The associated replication node could not be replicated because it is not currently enabled for replication. Associated replication nodes must have a replication mode set to SEND and a replication state of ENABLED in order to be replicated to a target server.

System action

The replication operation continues. The replication of the associated node fails.

User response

To use an associated replication node with a client during a failover operation enable the associated replication node for replication.

ANR31 89E Replication of associated replication node associated replication node name failed - the target node is not enabled for replication

Explanation

During a REPLICATE NODE operation, the server attempted to replicate a node that is either a proxy agent or referenced in a file space authorization rule of a replicating node. The associated replication node could not be replicated because the node definition on the target server is not currently enabled for replication. Associated replication nodes on the target server must have a replication mode set to RECV and a replication state of ENABLED in order to be replicated from a source server.

System action

The replication operation continues. The replication of the associated node fails.

User response

To replicate an associated replication node set the replication state of the node on the target server to enabled.

ANR31 90E Node node name on server server name uses a different primary server for replication.

Explanation

When you issued the REPLICATE NODE command, the server attempted to replicate a node to another server. However, the other server already has a replica of the node from a different primary server.

System action

The replication of the node fails. Server operation continues.

User response

Issue the RENAME NODE command to rename the node, or issue the REMOVE REPLNODE command to remove the node from replication with the current primary server.

ANR31 91E The Command command was not processed because the stgtype storage type supports only primary storage pools.

Explanation

The issue was caused by restrictions on storage types. If the POOLTYPE parameter is specified, the value must be PRIMARY. Alternatively, the STGTYPE=DEVCLASS setting must be specified for the storage pool.

System action

System operation continues, but the server does not process the command.

User response

Either specify a sequential device class or omit the POOLTYPE parameter. Then, reissue the command.

ANR31 92I repl command Proxy agent nodes replicated: proxy nodes replicated of proxy nodes found identified. Associated authorized nodes replicated: authorized nodes replicated of authorized nodes found identified. Client option sets replicated: option sets replicated of option sets found identified.

Explanation

The replication process has completed. The meanings of the numbers are:

- Proxy agent nodes are the number of nodes which are identified as proxy agents for any of the nodes specified in the REPLICATE NODE command.
- Associated authorized nodes are the number of nodes referenced in file space authorization rules of any of the nodes specified in the REPLICATE NODE command.
- Client option sets are the number of option sets which are referenced by any of

the nodes specified in the REPLICATE NODE command.

System action

None.

User response

None.

ANR31 repl command 93I Proxy agent nodes identified: proxy nodes found. Associated authorized nodes identified: authorized nodes found. Client option sets identified: option sets found.

Explanation

The preview replication process has completed. The meanings of the numbers are:

- Proxy agent nodes are the number of nodes which are identified as proxy agents for any of the nodes specified in the REPLICATE NODE command.
- Associated authorized nodes are the number of nodes referenced in file space authorization rules of any of the nodes specified in the REPLICATE NODE command.
- Client option sets are the number of option sets which are referenced by any of the nodes specified in the REPLICATE NODE command.

System action

None.

User response

None.

ANR31 Identified node 94I associated replication node as a proxy agent for replicated node reference node

Explanation

The preview replication process has completed. The server has identified an associated proxy agent node referenced by a replicated node. The proxy agent node definition will be replicated if the referencing node is replicated.

System action

Server operations continue.

User response

None.

ANR31 Identified node 95I associated replication node which is referenced in a file space authorization rule for replicated node reference node

Explanation

The preview replication process has completed. The server has identified an associated replication node that is referenced in a file space authorization rule of a replicated

node. The associated node definition will be replicated if the referencing node is replicated.

System action

Server operations continue.

User response

None.

ANR31 Communication 96E error occurred on Session session number during import from (communication method communication address).

Explanation

A communication error occurred during import from another server.

System action

The import process is ended.

User response

Determine the cause of the communication error and retry the import.

ANR31 command: 97W Replication of authorization rule failed for node node name, filespace Id filespace id on target server target server - a duplicate rule exists on the target server.

Explanation

A file space authorization rule on this server could not be replicated to the target server because an identical rule already exists on the target server.

System action

Server operation continues.

User response

A file space which is being replicated contains an authorization rule that exists on both the source and target servers. Determine which authorization rule should be used on the target server using the QUERY ACCESS command of the IBM Storage Protect client. Once you have decided which authorization rule to use, delete the unneeded authorization rule using the DELETE ACCESS command of the IBM Storage Protect client.

ANR31 command: The 98E server server name definition could not be retrieved. The database is in an inconsistent state.

Explanation

An error occurred while accessing the server information.

System action

The command fails.

User response

For details and instructions to resolve the issue, see Technote 1598476 at <http://www.ibm.com/support/entry/portal/>. Type 1598476 in the Search field.

ANR31 Server halt for 99I stage stage initiated at time.

Explanation

The server HALT processing is being performed and each stage is reported with the time when that stage was initiated.

System action

None.

User response

This message may not be logged to the activity log. It is provided for informational purposes only. The stages reported are for informational purposes and only to denote progress. The sequence and actual stages to be performed during halt may vary and as such will cause this not to always report in the same fashion. The primary consideration is that the INIT stage and the COMPLETE stage can be used to calculate the time used to halt the server. These messages are only displayed if the halt command is issued with the verbose parameter such as: "HALT VERBOSE".

ANR32 command: 00E Command cannot be

executed - domain domain name is a managed object.

Explanation

The specified command cannot be executed because it would alter the contents of the indicated managed domain. With the exception of policy set activation, a managed domain can only be modified using configuration information propagated from the configuration manager.

System action

The command fails and server operation continues.

User response

None.

ANR32 command: 01E Domain domain name is a managed object and cannot be deleted.

Explanation

The indicated domain is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with

which domain *domain name* is associated.

ANR32 command: 02E Domain domain name is a managed object and cannot be updated.

Explanation

The indicated domain is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command: 03E Policy set set name in domain domain name is a managed object and cannot be deleted.

Explanation

The indicated policy set is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the

configuration profiles with which domain *domain name* is associated.

ANR32 command: 04E Policy set set name in domain domain name is a managed object and cannot be updated.

Explanation

The indicated policy set is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command: 05E Management class class name in domain domain name, policy set set name is a managed object and cannot be deleted.

Explanation

The indicated management class is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
06E Management class *class name* in domain *domain name*, policy set *set name* is a managed object and cannot be updated.

Explanation

The indicated management class is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
07E Backup copy group *group name* in domain *domain name*, policy set *set name*, management class *class name* is a managed object and cannot be deleted.

Explanation

The indicated backup copy group is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
08E Archive copy group *group name* in domain *domain name*, policy set *set name*, management class *class name* is a managed object and cannot be deleted.

Explanation

The indicated archive copy group is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with

which domain *domain name* is associated.

ANR32 command:
09E Backup copy group *group name* in domain *domain name*, policy set *set name*, management class *class name* is a managed object and cannot be updated.

Explanation

The indicated backup copy group is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
10E Archive copy group *group name* in domain *domain name*, policy set *set name*, management class *class name* is a managed object and cannot be updated.

Explanation

The indicated archive copy group is a managed object and cannot be

updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
11E Client schedule *schedule name* in domain *domain name* is a managed object and cannot be deleted.

Explanation

The indicated client schedule is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
12E Client schedule *schedule name* in domain *domain name* is a managed object and

cannot be updated.

Explanation

The indicated client schedule is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which domain *domain name* is associated.

ANR32 command:
13E Administrative schedule *schedule name* is a managed object and cannot be deleted.

Explanation

The indicated administrative schedule is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
14E Administrative schedule *schedule name* is a managed object and cannot be updated, except to activate or deactivate the schedule.

Explanation

The indicated administrative schedule is a managed object and cannot be updated on the managed server, except to change the active state of the schedule.

System action

The command fails and server operation continues.

User response

To update this object, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 Managed domain *domain name* contains at least one node and cannot be discarded.

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated domain cannot be discarded on the managed server because it still contains one or more nodes.

System action

Domain *domain name* is not deleted. Policy sets, management classes, copy groups, and client schedules belonging to this domain are also not deleted.

User response

Before this domain can be deleted, nodes in the domain must be removed or assigned another domain.

ANR32 Managed administrative schedule *schedule name* is active and cannot be discarded.

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated administrative schedule cannot be discarded on the managed server because it is in the active state.

System action

Administrative schedule *schedule name* is not deleted.

User response

Before this administrative schedule can be deleted, it must be deactivated using the Update Schedule command.

ANR32 command:
17E Administrator *administrator name* is a managed object

and cannot be removed.

Explanation

The indicated administrator is a managed object and cannot be removed on the managed server.

System action

The command fails and server operation continues.

User response

To remove this administrator, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
18E Administrator *administrator name* is a managed object and cannot be updated.

Explanation

The indicated administrator is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this administrator, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
19E Administrator

administrator name is a managed object and cannot be renamed.

Explanation

The indicated administrator is a managed object and cannot be renamed on the managed server.

System action

The command fails and server operation continues.

User response

To rename this administrator, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
20E Administrator administrator name is a managed object - authority cannot be granted.

Explanation

The indicated administrator is a managed object. Authority cannot be granted to this administrator on the managed server.

System action

The command fails and server operation continues.

User response

To grant authority to this administrator, you can

delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
21E Administrator administrator name is a managed object - authority cannot be revoked.

Explanation

The indicated administrator is a managed object. Authority of this administrator cannot be revoked on the managed server.

System action

The command fails and server operation continues.

User response

To revoke authority of this administrator, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 Managed administrator administrator name is the only system administrator and cannot be discarded.
22W

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated administrator cannot be discarded on the managed server because

it is the only system administrator.

System action

Administrator *administrator name* is not deleted.

User response

Before this administrator can be deleted, another administrator must be given system authority.

ANR32 Managed administrator administrator name is currently accessing the server and cannot be discarded.
23W

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated administrator cannot be discarded on the managed server because it has an active session with the server.

System action

Administrator *administrator name* is not deleted.

User response

Quit or cancel all sessions for this administrator before discarding the administrator definition.

ANR32 command:
24E Command script command script name is a managed object

and cannot be deleted.

Explanation

The indicated command script is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this script, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
25E Command script command script name is a managed object and cannot be updated.

Explanation

The indicated command script is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this script, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
26E Command script command script name is a

managed object
and cannot be
renamed.

Explanation

The indicated command script is a managed object and cannot be renamed on the managed server.

System action

The command fails and server operation continues.

User response

To rename this script, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
27E Option set
optionset name
is a managed
object and
cannot be
deleted.

Explanation

The indicated option set is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this option set, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
28E Option set
optionset name

is a managed
object and
cannot be
updated.

Explanation

The indicated option set is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this option set, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
29E Command
cannot be
executed -
option set
optionset name
is a managed
object.

Explanation

The specified command cannot be executed because it would alter the contents of the indicated managed option set.

System action

The command fails and server operation continues.

User response

None.

ANR32 command:
30E Server group
group name is a
managed object

and cannot be
deleted.

Explanation

The indicated server group is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this server group, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
31E Server group
group name is a
managed object
and cannot be
updated.

Explanation

The indicated server group is a managed object and cannot be updated on the managed server.

System action

The command fails and server operation continues.

User response

To update this server group, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
32E Server group
group name is a

managed object
and cannot be
renamed.

Explanation

The indicated server group is a managed object and cannot be renamed on the managed server.

System action

The command fails and server operation continues.

User response

To rename this server group, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
33E Command
cannot be
executed -
server group
group name is a
managed
object.

Explanation

The specified command cannot be executed because it would alter the membership of the indicated managed server group.

System action

The command fails and server operation continues.

User response

None.

ANR32 command:
34E Server server
name is a
managed object

and cannot be deleted.

Explanation

The indicated server is a managed object and cannot be deleted on the managed server.

System action

The command fails and server operation continues.

User response

To delete this object, you can delete the subscription to the configuration profiles with which the object is associated.

ANR32 command:
35E **Server server name is a managed object - one or more specified attributes cannot be updated.**

Explanation

Because the indicated server is a managed object, certain attributes cannot be updated on the managed server. These attributes are: SERVERPASSWORD, HLADDRESS, LLADDRESS, COMMMETHOD, DESCRIPTION, URL, and ALLOWREPLACE.

System action

The command fails and server operation continues.

User response

You can restrict the update to attributes that can be updated on the managed server. For example, the PASSWORD, NODENAME, FORCESYNC, and DELGRACEPERIOD attributes can be updated, even if the server is a managed object. Alternatively, you can delete the subscription to the configuration profiles with which the object is associated, so that the server is no longer a managed object.

ANR32 Server server 36W **name is currently in use and cannot be discarded.**

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated server cannot be discarded on the managed server because *server name* is in use. This could occur if the managed server has an active connection to *server name* or if the managed server has a device class with DEVTYPE=SERVER that refers to *server name*.

System action

Server *server name* is not deleted.

User response

Before *server name* can be deleted, the managed server must not have a

connection to that server and the managed server cannot have any device-class references to that server.

ANR32 Server server 37W **name is the event server and cannot be discarded.**

Explanation

This message is issued while processing a DELETE SUBSCRIPTION command with DISCARDOBJECTS=YES. The indicated server cannot be discarded because it is the event server for the managed server.

System action

Server *server name* is not deleted.

User response

Before *server name* can be deleted, the DELETE EVENTSERVER command must be used to remove the event server reference to *server name*.

ANR32 command: This 38E **object cannot be renamed because it is associated with one or more configuration profiles.**

Explanation

This message is issued on a configuration manager when an attempt is made to rename an object that is associated with one or more configuration profiles. Associated objects cannot be

renamed because the enterprise configuration facility does not support renaming of objects.

System action

The command fails and server operation continues.

User response

If you must change the object name you can delete the object, define it with a new name, and then define a profile association to the new object (unless a wildcard profile association already exists). This will cause the object to be deleted and re-defined on managed servers with subscriptions to the profiles with which this object is associated.

ANR32 Error rc while 39E **creating device class device class.**

Explanation

This message is issued when a device class could not be created, because there was an error while processing the device configuration file.

System action

The command fails.

User response

Look in the device configuration file for errors, and look at the activity log for any previous error messages that might help determine the location of these

errors in the device configuration file.

ANR32 40W *The device class device class only has number of drives drives while the number of streams requested is number of streams.*

Explanation
This message is issued when a the NUMSTREAM parameter is being specified with a value higher than the number of drives available to the device class.

System action
The command continues.

User response
The value will be updated as requested. If the number of drives available at the time the database backup is attempted is less than the number of streams, the database backup will be performed using the number of online drives as the number of streams. For example, if the number of available drives is 2 but the NUMSTREAM value had been set to 4, than the database backup will be done using only 2 streams.

ANR32 41W *The value specified for server option option 1 is ignored due to the setting of option option 2.*

Explanation
The value specified for the first option is ignored because the second option takes precedence.

System action
The default value of the option is used. Server operation continues.

User response
Modify the values for one or both of the server options so that they no longer conflict. Restart the server.

ANR32 42E *command: Replication server server Name is currently being deleted by a REMOVE REPLSERVER command.*

Explanation
When you issue the REMOVE REPLSERVER command, the replication server that you specify to remove is already in the process of being deleted as a result of a previous REMOVE REPLSERVER command.

System action
The command is stopped by the server.

User response
Issue the QUERY REPLSERVER command to verify the current status of the replication server. Verify that the replication GUID specified is correct for the server you are deleting.

ANR32 43E *command: Replication server server Name is currently being deleted by a previous REMOVE REPLSERVER command.*

Explanation
When you issue the REPLICATE NODE command, the default replication server is already in the process of being deleted as a result of a previous REMOVE REPLSERVER command.

System action
The command is stopped by the server.

User response
Issue the QUERY REPLSERVER command to verify the current status of the replication server. Update the default replication server with the SET REPLSERVER command.

ANR32 44E *Session session number for server server name error - replication server is currently being deleted by a previous REMOVE REPLSERVER command.*

Explanation
At the start of a REPLICATE NODE process on a target server, the replication server is already in the

process of being deleted on the target server as a result of a previous REMOVE REPLSERVER command.

System action
The command is stopped by the server.

User response
Issue the QUERY REPLSERVER command to verify the current status of the replication server. Update the default replication server with the SET REPLSERVER command.

ANR32 45W *Session session number for node node name (client platform) - no failover connection information found for server server name.*

Explanation
During client sign-on, there was no failover server connection information stored. This is caused when you issue the REMOVE REPLSERVER command on the failover server that is defined in the associated node definition. No change is made to the stored failover server connection information in the client option file. The client will fail over to the last known failover server.

System action
Server operation continues.

User response

No action is needed if the failover server in the client option file is still valid. Replicate the node to the default target replication server in order to update the node's failover server.

ANR32 46W *Process process ID skipped Num Files files on volume Volume name because the files have been deleted.*

Explanation

Some of the files that were encountered during the move operation were skipped because they have already been deleted.

System action

The operation skips the files without making copies and continues.

User response

None.

ANR32 47W *Process process ID skipped Num Files files on volume Volume name because of pending fragments.*

Explanation

Some of the files that were encountered during the move operation were skipped because they contained pending fragments.

Large files are split into smaller pieces or fragments for performance reasons.

When fragments are copied or moved to another storage pool, they are marked pending until all fragments that comprise the file arrive at the target storage pool. The pending state is removed from the fragments once all fragments have been successfully moved.

System action

The operation skips the files without making copies and continues.

User response

Server processes such as BACKUP STGPOOL, MOVE DATA, MOVE NODEDATA and storage pool migration can result in fragments being marked as pending. You can issue the QUERY PROCESS command to see whether any of the processes are running. If so, retry the operation at a later time when the fragments are not pending.

ANR32 48W *Process process ID skipped Num Files files on volume Volume name because it was unable to lock all segments.*

Explanation

The files were skipped because the process was unable to lock all segments of the files.

System action

The operation skips the files without making copies and continues.

User response

Retry the operation.

ANR32 49W *The process desc process with process ID process id is canceled by the process monitor.*

Explanation

The process is canceled because the mount wait time for the input or output volume has exceeded the mount wait limit that is set through the MOUNTWAITRESOURCELIMIT server option. Either there is a problem with a mount point, or the mount wait limit is set too low.

System action

Server operation continues.

User response

Check the setting for the MOUNTWAITRESOURCELIMIT server option and increase the value. If the problem persists with a higher value, contact your service representative.

ANR32 50E *Command: Directory directory is not defined in storage pool storage pool.*

Explanation

A nonexistent storage pool directory is specified for the issued command.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool directory. If you are using the MACRO command to define and update the storage pool directory, you must ensure that the DEFINE STGPOOLDIRECTORY command is committed before the UPDATE STGPOOLDIRECTORY command is issued.

ANR32 51E *Command: Storage pool stgpool name is not a container storage pool.*

Explanation

The storage pool specified is invalid for the command.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool. Only container storage pools may be used with STGPOOLDIRECTORY commands.

ANR32 52E *Command: Directory directory is already defined in storage pool storage pool.*

Explanation

An already existing storage pool directory is specified for the issued command.

System action

The server does not process the command.

User response

Reissue the command with a valid, unique storage pool directory.

ANR32 53W A client operation that was started by schedule *schedule name* is running longer than the maximum run time expected for client *node name*.

Explanation

When you defined or updated the schedule, you set a maximum run time for client operations that are associated with the schedule. Alternatively, in the Operations Center, you set an end time for the client operations. A client operation started as scheduled, but the operation is running after the end time or for longer than the maximum run time.

System action

The server issues this warning message, and the client operation continues.

User response

None.

ANR32 54I Storage pool directory *storage pool directory name* was defined in

storage pool *stgpool name*.

Explanation

A DEFINE STGPOOLDIRECTORY command has created the storage pool directory indicated of the storage pool shown.

System action

None.

User response

None.

ANR32 55I Storage pool directory *storage pool directory name* deleted.

Explanation

A DELETE STGPOOLDIRECTORY command has deleted the storage pool directory indicated.

System action

None.

User response

None.

ANR32 56I Storage pool directory *storage pool directory name* updated.

Explanation

An UPDATE STGPOOLDIRECTORY command has updated the storage pool directory indicated.

System action

None.

User response

None.

ANR32 57W command: *Filespace identifier fsId* is not defined for node *node name*.

Explanation

A filespace identifier specified in the REPLICATE NODE command is not defined for the indicated node.

System action

The replication operation continues for any other valid filespace identifiers specified.

User response

Use the QUERY FILESPACE command to verify the list of filespace identifiers provided in the REPLICATE NODE command.

ANR32 58E Command: *Device class device class name* has a device type of **SERVER** and the source server name is the same as the target.

Explanation

The specified device class has a device type of SERVER and the source and target server names are the same. IBM Storage Protect server database backups cannot be restored from virtual volumes that are on the same IBM Storage Protect server that was

used to complete the backups.

System action

Processing stops.

User response

Ensure that the virtual volumes are not on the IBM Storage Protect server that is being backed up and that the names of the source and target servers are unique.

ANR32 59W Session *session number* for node *node name* (*client platform*) refused - \$\$_TSMDBMGR_\$\$ node from an untrusted system is not allowed.

Explanation

The server refuses the specified client session because node \$\$_TSMDBMGR_\$\$ is allowed only from the trusted system for IBM Storage Protect database backup or restore.

System action

Server processing continues.

User response

Use \$\$_TSMDBMGR_\$\$ node from the trusted system for IBM Storage Protect database backup or restore.

ANR32 60E Database backup terminated due to a page validation failure that occurred during

a backup - Db2 sqlcode sqlcode sqlerrmc sqlerrmc. This might indicate corruption in the database, requiring a database restore or other repair action to correct.

Explanation

A page validation error was detected by Db2 and the error caused the database backup to fail.

System action

If a full database backup was in progress to free space in the archive log directory, take one of the following actions:

- Increase the amount of space in the archive log directory.
- Use the ARCHFAILOVERLOGDIR ECTORY option to specify a failover archive log directory in which the server can store log files that cannot be stored in the archive log directory.

For assistance in diagnosing and repairing any database corruption, contact IBM Software Support.

ANR32 61W An automatic full or incremental database backup will be started. The active log space used is log space used is megabytes, and the active log space available

is log space available megabytes. The ratio, active log used ratio, exceeds the threshold log utilization threshold.

Explanation

When the active log space used exceeds the log utilization threshold, a database backup is started. If there has been at least one full database backup, the backup is an incremental database backup. Otherwise, a full database backup is started.

System action

None.

User response

None.

ANR32 62W A full database backup might be required. The last log number used is last log used and the first log number used is first log used. The log file size is log file size megabytes. The maximum log file size is maximum log file size megabytes.

Explanation

When the log space used since the last database backup exceeds the maximum log file size, either a full database backup is required, or

the maximum log file size must be increased.

System action

None.

User response

None.

ANR32 63W Target replication server server name cannot detect a database restore operation. As a result, if the database is restored, data will not be reconciled between the source and target replication servers.

Explanation

In response to a PROTECT STGPOOL command, the source replication server tried to establish a connection with the target replication server. However, the target replication server is at a level that does not support the detection of database restore operations. If the database is restored, data will not be automatically reconciled.

System action

Server operations continue.

User response

To help ensure that data will be reconciled after a database restore

operation, upgrade the target replication server to the same level as the source replication server. If the database is restored, the data will be reconciled the next time the PROTECT STGPOOL command is run.

ANR32 64W A full database backup is needed. The active log space used is log space used is megabytes, and the active log space available is log space available megabytes. The ratio, active log used ratio, exceeds the threshold log utilization threshold.

Explanation

When the active log space used exceeds the log utilization threshold, a database backup is needed.

System action

None.

User response

None.

ANR32 65W A full database backup will be started. The archive log space used is archive log% and the archive log space used threshold is arch log threshold%.

Explanation

When the archive log space used exceeds the threshold, a full database backup will be started.

System action

None.

User response

None.

ANR32 66E Replication of node *node name* to target replication server *target server* failed. The reason is that a required policy domain is not defined on the target server.

Explanation

If you plan to replicate a node, but the node does not exist on the target server, you must ensure that an appropriate policy domain is defined for the node on the target server.

System action

The data that belongs to the node was not replicated, but server operations continue.

User response

To replicate the node, take one of the following actions:

- Define the policy domain that is used for the node on the source server to the target server.
- Define the STANDARD policy domain on the target server.

Then, restart the node replication process.

ANR32 67E The storage pool *stgpool name* cannot be defined as a container storage pool with this operating system.

Explanation

The command cannot be processed on this operating system.

System action

The server does not process the command.

User response

Use an operating system that is compatible with IBM Storage Protect to issue the command. For information about operating systems that are supported by IBM Storage Protect, see technote 1243309 "Overview - IBM Storage Protect Supported Operating Systems" (<http://www-01.ibm.com/support/docview.wss?uid=swg21243309>).

ANR32 68W Storage pool directory *storage pool directory name* access failed.

Explanation

The server was unable to access the specified storage pool directory. Either the file system is not available or permissions to the storage pool directory prevent access.

System action

The server does not process the command.

User response

Verify that the underlying file system is mounted correctly and is available. Verify that the server has full access permissions to the storage pool directory.

ANR32 69E Command: Storage pool access mode for pool *pool name* cannot be changed from UNAVAILABLE because the master encryption key is not available.

Explanation

The storage pool access mode cannot be changed because the pool is encrypted or contains encrypted data, and the server master encryption key is not available.

System action

The server does not process the command.

User response

Review the activity log for errors related to either the server master encryption key or the server password file. Correct any problems that prevent the master encryption key being read from the server password file. If necessary, rename the server key database, dsmkeydb.kdb, and its password stash file, dsmkeydb.sth, and

recover an earlier version of the key database from a backup. Restart the server. Reissue the UPDATE STGPOOL command to change the storage pool ACCESS setting.

ANR32 70E Command: Unsupported option - *option*

Explanation

The command shown specifies a client option for a client option set, which is no longer supported.

System action

The server does not process the command.

User response

Reissue the command with a valid client option.

ANR32 71W Command: Deprecated option - *option*

Explanation

The command shown specifies a deprecated client option for a client option set. While the specified option will be processed, it will be made obsolete at a future date.

System action

The server processes the command.

User response

Be prepared to remove the client option from the client option set in the future.

ANR32 72E Server *server name* does not

support replication using fasp as the transfer method.

Explanation

In response to a REPLICATE command, the server attempted to establish a connection to the replication target. But the target server does not support fasp as the transfer method.

System action

Server operation continues. The replication fails.

User response

Make sure the replication target is at the correct maintenance level and verify that the globally unique ID (GUID) of the target server is properly set. Use the tivguid utility to set the GUID if not properly set.

ANR32 Using Active Directory Domain LDAP DN for LDAP Authentication.
73I

Explanation

The Active Directory Domain was determined from the LDAP server base context.

System action

Server operation continues.

User response

None.

ANR32 Running in LDAP Legacy Mode.
74I

Explanation

The Server is running in LDAP Legacy Mode which requires an LDAP Administrator ID and an Organizational Unit which is specific to the server.

System action

Server operation continues.

User response

None.

ANR32 Running in LDAP Integrated Mode.
75I

Explanation

The Server is running in LDAP Integrated Mode which allows existing LDAP users to be registered to the server while managed through the LDAP server.

System action

Server operation continues.

User response

None.

ANR32 The server starts one or more background processes to update the database entries for data that is stored in the storage pool directory storage pool directory name.
76I

Explanation

Processes have been started in the background to update a stgpooldir.

System action

None.

User response

None.

ANR32 Command: Storage rule rule is already defined.
77E

Explanation

An existing storage rule is specified for the command.

System action

The server does not process the command.

User response

Reissue the command with a valid, unique storage rule name.

ANR32 Storage rule storage rule was defined.
78I

Explanation

A DEFINE STGRULE command has created the storage rule indicated.

System action

None.

User response

None.

ANR32 Command: Storage pool pool is already in use for
79E

another storage rule.

Explanation

A storage rule exists for the specified storage pool.

System action

The server does not process the command.

User response

Reissue the command with a valid, unique source storage pool.

ANR32 Storage rule rule name deleted.
80I

Explanation

A DELETE STGRULE command has deleted the storage rule indicated.

System action

None.

User response

None.

ANR32 Command: Storage rule rule name is not defined.
81E

Explanation

The storage rule name that is specified for the command does not exist.

System action

The server does not process the command.

User response

Reissue the command with a valid storage rule name.

**ANR32 Storage Rule
82I rule name
updated.**

Explanation

The storage rule was updated by the UPDATE STGRULE command.

System action

None.

User response

None.

**ANR32 Storage Rule
83E rule name
deletion failed
because process
is currently
active.**

Explanation

The storage rule deletion failed because there is currently an active process.

System action

The storage rule deletion fails.

User response

Try again when the storage rule is not running.

**ANR32 Tiering process
84W process ID
terminated for
storage pool
storage pool
name - duration
exceeded.**

Explanation

During a storage pool tiering action for the indicated storage pool, a process performing the tiering has been terminated because the

tiering duration has exceeded.

System action

The tiering process is terminated.

User response

None.

**ANR32 GSKit version
85W GSKit version is
below the
minimum
supported
version of
minimum GSKit
version.**

Explanation

The version of the IBM Global Security Kit (GSKit) libraries that is in use by the server is below the minimum supported version. Unexpected errors might occur as a result of using down-level GSKit libraries.

System action

Server operation continues.

User response

Review the instructions in IBM Knowledge Center for creating a server instance. Verify that the library path was modified to use the version of GSKit that is installed with the server.

**ANR32 Command:
86E Update Storage
Rule failed for
rule rule name
because the
specified
parameters are
not valid for
Action Type rule
action type.**

Explanation

The Storage Rule update failed because one or more parameters are not valid for the Action Type of the specified Storage Rule.

System action

The Storage Rule update fails.

User response

Verify the command syntax and reissue the command.

**ANR32 Command: The
87E DEFINE
STGRULE
command failed
for rule rule
name because
the specified
parameter
option name is
not valid for
action type rule
action type.**

Explanation

The operation failed because one or more parameters are not valid for the action type of the specified storage rule.

System action

System operation continues, but the DEFINE STGRULE command fails.

User response

Verify the command syntax and reissue the DEFINE STGRULE command.

**ANR32 The DEFINE
88E STGRULE
command failed
for rule rule**

**name because a
rule already
exists for
storage pool
pool name and
action type rule
action type.**

Explanation

The operation failed because a storage rule already exists for the action type and specified storage pool.

System action

System operation continues, but the DEFINE STGRULE command fails.

User response

Verify the command storage pool and reissue the DEFINE STGRULE command.

**ANR32 Command:
89E Protect in
progress
prevents moving
container for
storage pool
storage pool.**

Explanation

A storage pool directory can not be moved while it is undergoing protect.

System action

The server does not process the command.

User response

Reissue the command once protect has completed.

**ANR32 Storage subrule
90I storage subrule
was defined.**

Explanation

The DEFINE STGSUBRULE command was used to define the specified subrule.

System action

The subrule is defined and system operation continues.

User response

No action is required.

ANR32 Command: 91E Storage subrule *Subrule name* is not defined.

Explanation

A storage subrule with the specified name does not exist.

System action

The server does not process the command.

User response

Reissue the command with a valid storage subrule name.

ANR32 Storage subrule 92I *subrule name* deleted.

Explanation

A DELETE STGSUBRULE command was used to delete the specified subrule.

System action

The subrule is deleted and system operation continues.

User response

No action is required.

ANR32 The deletion of 93E subrule *subrule name* failed because process is currently active.

Explanation

The deletion failed because a process that is associated with the storage subrule is active.

System action

The deletion failed, but system operation continues.

User response

Retry the delete operation when the storage subrule is not running.

ANR32 Storage Subrule 94I *rule name* updated.

Explanation

The storage subrule was updated by the UPDATE STGSUBRULE command.

System action

None.

User response

None.

ANR32 A storage 95E subrule member for node *node name* and file space *file space name* would conflict with an existing subrule member.

Explanation

The storage subrule member addition failed

because there is already a member of a subrule which would include the same node and file space. If the existing subrule specified a wildcard to include all file space, you cannot add a specific file spaces to the subrule. See the FILESPACE parameter for the UPDATE STGRULE command.

System action

The storage subrule member addition failed, but system operation continues.

User response

Define a storage subrule member that does not conflict with an existing member.

ANR32 Command: 96E Storage subrule *rule* is already defined.

Explanation

The command specifies a storage subrule that already exists.

System action

The server does not process the command.

User response

Reissue the command with a valid, unique storage subrule name.

ANR32 Objects were 97I deleted from volume *volume name* , node *node name* , and file space *file space* .

Explanation

The server deleted objects from the reported volume, node, and file space.

System action

System operation continues.

User response

This message is for informational purposes only.

ANR32 Command: The 98I MAXPROC value, *maxproc*, is greater than the number of available drives (*num drives*) for storage pool *tgt pool*. The storage rule *stgrule* will be defined with a MAXPROC value of *num drives*.

Explanation

The MAXPROC parameter was specified with a value that is greater than the number of available drives.

System action

Command processing continues. The MAXPROC value is updated to match the number of available drives.

User response

No action is required.

ANR32 Command: 99E Cannot add and remove storage subrule members in the same command.

Explanation

Storage subrule members cannot be added and removed simultaneously.

System action

System operation continues.

User response

Use one command to add member(s) and another to remove member(s) from storage subrules.

ANR33 The FILELIST 00W file named *list file name* does not contain any valid directories.

Explanation

The server detected that the FILELIST file does not contain any valid directories.

System action

The RESTORE DB operation fails.

User response

Update the FILELIST file to include at least one valid directory.

ANR33 The EXTEND 01E DBSPACE failed because database backup processing is active.

Explanation

The database backup and EXTEND DBSPACE processing are in conflict and cannot be active simultaneously.

System action

The EXTEND DBSPACE operation failed and is terminated.

User response

Rerun the EXTEND DBSPACE after the database backup completes.

ANR33 The database 02E backup failed because EXTEND DBSPACE processing is active.

Explanation

The database backup and EXTEND DBSPACE processing are in conflict and cannot be active simultaneously.

System action

The database backup operation failed and is terminated.

User response

Rerun the database backup after EXTEND DBSPACE processing completes.

ANR33 Error updating 03E database configuration parameters: Unable to deactivate database.

Explanation

The server attempted to deactivate the database while updating database configuration parameters. However, the database could not be deactivated

because connections still exist.

System action

The server terminates.

User response

Log in as the instance user. Issue the DB2 LIST APPLICATIONS FOR DATABASE tsmdb1 SHOW DETAIL command to display information about applications that are connected to the database. Issue the DB2 FORCE APPLICATION ALL command to force all applications to disconnect from the database. When all applications have disconnected, start the server.

ANR33 The LDAPURL 04E server option values specify both LDAP and LDAPS values for the LDAP server host addresses.

Explanation

LDAPS represents using a Secure Sockets Layer (SSL) connection and sending LDAP data over an existing SSL connection. LDAP represents using a connection that is secured by using the standard LDAPv3 "StartTLS" operation to establish a secure TLS exchange on an existing LDAP connection. When you specify multiple LDAPURL server option values, they must all be LDAPS or must all be LDAP addresses.

System action

Server operations continue. LDAP directory services are not available.

User response

Correct the LDAPURL server option values and restart the IBM Storage Protectserver.

ANR33 Command: The 05E next storage pool, *NextPool Name*, that is specified is not a tape storage pool and is not suitable for the *Operation* operation associated with storage pool *Pool Name*.

Explanation

You must specify a tape storage pool as the next storage pool.

System action

The server does not process the command.

User response

Specify a tape storage pool as the next storage pool and reissue the command.

ANR33 Command: 06E Storage rule *rule* for retention storage pool *pool* is already defined.

Explanation

The server attempted to create a storage rule for the specified retention storage pool,

but the storage rule already exists.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool name that does not match an existing storage rule name.

ANR33 07E *Command: The operation is not supported for rules with action type rule action type.*

Explanation

The operation failed because it is not supported for the action type of the specified storage rule.

System action

The server does not process the command.

User response

For the DEFINE STGRULE command the storage rule will be created by the server when the storage pool with POOLTYPE=RETENTION is created. For the DELETE STGRULE command the storage rule will be deleted when its corresponding storage pool is deleted.

ANR33 08I *Storage rule old rule name renamed to new rule name.*

Explanation

The indicated storage rule has been renamed.

System action

None.

User response

None.

ANR33 09E *Storage Rule rule name rename failed because process is currently active.*

Explanation

The storage rule rename failed because there is currently an active process.

System action

The storage rule rename fails.

User response

Try again when the storage rule is not running.

ANR33 10W *Because a database restore operation was detected, server server name must be reconciled with its partner server for the PROTECT STGPOOL command. The operation to reconcile the servers is under way.*

Explanation

The database of the specified server or its partner server was restored. To ensure data consistency, it is necessary to reconcile the servers.

System action

The PROTECT STGPOOL operation continues. As part of this operation, the servers will be reconciled.

User response

No action is required.

ANR33 11E *Command: The DEFINE SUBRULE command failed for subrule subrule name in stgrule rule name because the specified parameter option name is not valid for action type rule action type.*

Explanation

The operation failed because one or more parameters are not valid for the action type of the specified storage rule.

System action

System operation continues, but the DEFINE SUBRULE command fails.

User response

Verify the command syntax and reissue the DEFINE SUBRULE command.

ANR33 12I *command: During command processing, the following number of containers were eligible for updates: eligible updates. The following number of containers were successfully updated: successful updates.*

Explanation

The command produced summary statistics stating how many containers were eligible for updates and how many containers were successfully updated.

System action

The command succeeded and system operation continues.

User response

No action is required.

ANR33 13E *Command: The devtype device class is not supported for storage pools.*

Explanation

An attempt is made to define a storage pool using an invalid device class. These storage pools can only be assigned to a supported device class.

System action

The server does not process the command.

User response

Reissue the command specifying a valid device class.

ANR33 14E Backup copy group for management class *classname* was not found.

Explanation

While processing the REPLICATE NODE command, the server was unable to find the specified backup copy group.

System action

Server operation continues. The replication operation fails.

User response

Contact IBM Software Support for assistance.

ANR33 15I Command: Connection *connection name* defined.

Explanation

The command has successfully defined a connection.

System action

The command succeeded.

User response

None.

ANR33 16I Command: Connection *connection name* deleted.

Explanation

The command has successfully deleted the connection.

System action

The command succeeded.

User response

None.

ANR33 17E Command: Connection *connection name* not defined.

Explanation

Connection *connection name* is not defined to the system.

System action

The command fails.

User response

None.

ANR33 18E Command: Connection *connection name* is already defined.

Explanation

The command indicated has attempted to define a connection that already exists.

System action

The server does not process the command.

User response

None.

ANR33 19I Command: Connection

***connection name* updated.**

Explanation

The command has successfully updated a connection.

System action

The command succeeded.

User response

None.

ANR33 20I Enter a number in the range 1 - *highest option*, or 'C' to cancel:

Explanation

You must enter the number of a listed option to select a cloud subdirectory, or 'C' to cancel.

System action

The database restore operation is paused for a valid response.

User response

Enter either a valid option number, or 'C'.

ANR33 21I Enter a number in the range 1 - *highest option*, 'C' to cancel, or 'N' for more results:

Explanation

To select the corresponding cloud subdirectory, enter the number of any listed option. Or, enter 'C' to cancel or 'N' for more options.

System action

The database restore operation is paused for a valid response.

User response

Enter a valid option number or enter 'C' or 'N'.

ANR33 22I To resume the database restore operation, you must specify a subdirectory in cloud storage.

Explanation

Files that are required for the database restore operation must be read from cloud storage.

System action

Available subdirectories are listed after this message.

User response

To resume the database restore operation, select the appropriate subdirectory. You can find the appropriate subdirectory by looking for the name of the server that backed up the database. That server name is incorporated into the subdirectory name.

ANR33 23I Subdirectory *subdirectory name* will be used for the database restore operation.

Explanation

The files that are required to start a database restore operation will be

downloaded from the named subdirectory.

System action

The database restore operation will proceed.

User response

No action is required.

ANR33 Command: The 24E *Command: The command was not processed. Server server name is already specified as the target server in another replicate storage rule.*

Explanation

For command processing to succeed, you must specify a target server name that is not already defined in another replicate storage rule. You cannot specify the same target server for multiple replicate storage rules.

System action

System operation continues, but the server does not process the command.

User response

Specify a valid server name and reissue the command.

ANR33 Command: 25W *Command: Subrule subrule name was specified more than once. However, the specified subrule is processed only once by the command.*

Explanation

When a replication storage rule is processed, any specified subrules are processed only once.

System action

Server operation continues.

User response

When you issue the START STGRULE command to start a replication storage rule, ensure that any subrules are specified only once.

ANR33 Command: The 26E *Command: The command failed because the IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer method is not supported on this operating system.*

Explanation

FASP data transfer is supported only on the Linux x86_64 operating system.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command without specifying the FASP data transfer method. Instead, you can specify a parameter value of TRANSFERMETHOD=TCP IP or reissue the command without

specifying the TRANSFERMETHOD parameter.

ANR33 The IBM Storage 27E *Protect server cannot connect to the cloud service provider due to a Transport Layer Security (TLS) error.*

Explanation

The connection to the cloud service provider failed because certificate files are missing.

System action

The command fails.

User response

Ensure that the necessary certificate files are imported into the keystore location. The logistics of importing the certificates are determined by your client application. Then, reissue the command.

ANR33 Command: The 28E *Command: The command was not processed because of an invalid parameter. The parameter name parameter is valid only if the REPLICATE or NOREPLICATING action type is specified for the storage rule.*

Explanation

The specified parameter is valid only for replication storage rules, which have an action

type of REPLICATE or NOREPLICATING.

System action

System operation continues, but the command is not processed.

User response

Reissue the command with valid parameter settings.

ANR33 Replication 29W *process process ID ended for storage rule on target server target server. The maximum duration of the process was exceeded.*

Explanation

A replication process was initiated by the specified storage rule, but the process was not completed because of a timeout.

System action

The system operation continues.

User response

No action is required. However, to help ensure that the replication process can be completed, use the UPDATE STGRULE command to set a longer maximum duration. For example, if the rule is named REPL2 and you want to specify 1000 minutes as the maximum duration, you would issue the following command:

update stgrule repl2
duration=1000

ANR33 30E *Command: Connection connection name does not have a KEYLOCATION value specified, and cannot be used for device classes.*

Explanation

The specified CONNECTION value corresponds to a connection using a Google cloud type, but which does not have a KEYLOCATION specified. Therefore, a device class cannot use this connection.

System action

The command is not processed.

User response

Specify a CONNECTION value which has a different cloud type or a KEYLOCATION specified. To set a KEYLOCATION on this connection, use the UPDATE CONNECTION command and set the KEYLOCATION value by specifying a path to a json file which contains the credentials to access the Google-based bucket referenced by the connection.

ANR33 31E *Command: The command was not processed because the Parameter parameter setting is not valid for this subrule. The*

Parameter parameter setting is valid only if all file spaces are specified by using a wildcard character.

Explanation

When you issue the UPDATE SUBRULE command and specify the NODE parameter to replace the existing node in the subrule or ADDNODE parameter to add another node to the storage subrule, you must ensure that a wildcard character is specified for the existing FILESPACE parameter in the subrule. Use an asterisk (*) as a wildcard character. The UPDATE SUBRULE command fails if individual file spaces are specified in the subrule.

System action

System operation continues, but the server does not process the command.

User response

To resolve the issue, take one of the following actions:

- Reissue the command with the NODE or ADDNODE parameter and ensure that the existing FILESPACE parameter in the subrule is specified by a wildcard character.
- Use the DEFINE SUBRULE or UPDATE SUBRULE command to define or update a separate subrule. On

that subrule, specify the NODE or ADDNODE parameter and ensure that the existing FILESPACE parameter in the subrule is specified by a wildcard character.

ANR33 32I *The ETag check was successful for volume volume name. A successful ETag check indicates a high probability that the data in the cloud object storage volume is consistent.*

Explanation

When you audit a volume in a cloud retention storage pool by issuing the AUDIT VOLUME command, the server verifies the integrity of the volume by comparing the entity tag (ETag) that is reported by the cloud service with the ETag that is saved in the server database. If the cloud service ETag matches the server database ETag, the server does not scan the volume for inconsistencies unless the READCLOUDDATA=YES parameter was specified for the AUDIT VOLUME command.

System action

System operation continues.

User response

No action is required.

ANR33 33W *The ETag check failed for the*

volume volume name. A failed ETag check indicates that the data in the cloud object storage volume might have inconsistencies.

Explanation

When you audit a volume in a cloud retention storage pool by issuing the AUDIT VOLUME command, the server verifies the integrity of the volume by comparing the entity tag (ETag) that is reported by the cloud service with the ETag that is saved in the server database. If the cloud service ETag does not match the server database ETag, the data in the volume might have inconsistencies, so the server scans the volume.

System action

System operation continues.

User response

No action is required.

ANR33 34W *The server experienced a TCP/IP error while receiving data on socket socket number. The error codereturn code was generated from the server with IP Address as origin address.*

Explanation

A communication error occurred on the indicated

socket from the indicated address. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is intentionally ended or stopped by either the client or the server, no action is required. Otherwise, ensure that the client and server can communicate using a TCP/IP application. If a system utility such as a port scanner is in use, consider excluding the server address and port numbers. This error is expected in LAN-free backup and archive operations when the client encryption is set. This is because client encryption with the include.encrypt option is no longer supported for LAN-free backup and archive operation.

ANR33 35W Unable to distribute certificate to Id for session session number.

Explanation

An SSL certificate could not be distributed to the requesting server, node or administrator because the value of the associated SESSIONSECURITY parameter is set to STRICT.

For server-to-server sessions, each server

must have the certificate of the partner server in the server key database. Nodes and administrators must have the certificates for each server to which they connect. Certificates are distributed automatically, but are subject to restrictions that are specified by the SESSIONSECURITY parameter.

System action

The requested certificate is not delivered. Operations that require the certificate might fail.

User response

Manually add the certificate to the key database of the requesting server. For information about configuring SSL connections, see the instructions in IBM Knowledge Center. To verify security settings, issue one of the following commands: QUERY ADMIN adminname F=D QUERY NODE nodename F=D QUERY SERVER servername F=D

ANR33 36W Default certificate labeled Label in key data base is down level.

Explanation

The default label in the key data base is down level.

System action

Consider updating default certificate to a more secure certificate.

User response

None.

ANR33 37I The ETag for the following volume was successfully updated to match the ETag that was reported by the cloud service: volume name.

Explanation

When you audit a volume in a cloud retention storage pool by issuing the AUDIT VOLUME command, the server verifies the integrity of the volume by comparing the entity tag (ETag) that is reported by the cloud service with the ETag that is saved in the server database. If the cloud service ETag does not match the server database ETag, the server scans the volume for inconsistencies. If a scan of the volume finds no inconsistencies, the ETag that is saved in the server database is updated to match the ETag that was reported by the cloud service.

System action

System operation continues.

User response

No action is required.

ANR33 38E Session with node or system at address hladdress failed due to use of TLS at level SSL Level instead of

TLS 1.2 or higher.

Explanation

When the server or storage agent option SSLEnableLegacyTLS is set to YES, the server enforces a TLS level of 1.2 or higher. If TLS is at a level lower than 1.2 or if any level of SSL is used, the session fails. Likewise, if the SESSIONSECURITY setting for the entity (node, administrator, or server definition) is set to STRICT, then TLS 1.2 or higher is also required. If the SESSIONSECURITY parameter is set to TRANSITIONAL and the entity successfully authenticates by using TLS 1.2, that connection is remembered and the entity can no longer authenticate at a lower level.

System action

The session fails. Server or storage agent operation continues.

User response

Reconfigure the client or server to use TLS 1.2. Until the client or server that is receiving this message is using TLS 1.2, the server or storage agent will continue to reject the session.

ANR33 39I Default Label in key data base is Label.

Explanation

The default SSL label in the key data base is displayed.

System action

Server or storage agent operation continues.

User response

None.

ANR33 40W The CLEANUP REPLGROUPS command failed or some records were skipped. Issue the command again to clean up orphan records.

Explanation

The cleanup replgroups process may skip orphan records from being deleted. Some common reasons for this error are:

1. The node is currently replicating.
2. The cleanup replgroups process is cancelled.
3. Unexpected internal errors, which can be displayed the activity log.

System action

The command terminates.

User response

Review the activity log for errors. Correct the error and issue the command again.

ANR33 41I Process process ID was started to decommission node name.

Explanation

When you run the DECOMMISSION

NODE command, a process is started to prepare the node for decommissioning and deactivating backup files for the node.

System action

The Decommission process can be canceled. Server operation continues.

User response

No action is required. However, you can query the process by using the QUERY PROCESS command: query process process_number You can cancel the process by using the CANCEL PROCESS command: cancel process process_number

ANR33 42I The process of decommissioning a node was canceled.

Explanation

The CANCEL PROCESS command was issued to end the process of decommissioning a node. The process will end shortly.

System action

The decommission process will end, but server operation continues.

User response

No action is required.

ANR33 44E Command: An error occurred while deactivating data for node name.

Explanation

An error occurred while deactivating backup files for the specified node.

System action

The DEACTIVATE DATA command is ended, but server operation continues.

User response

No action is required.

ANR33 45I Process process ID was started to deactivate data for node name.

Explanation

When you run the DEACTIVATE DATA command, a process begins to prepare the node for deactivation of its active backup files.

System action

The deactivation process can be canceled. Server operation continues.

User response

No action is required. However, you can query the process by using the QUERY PROCESS command: query process process_number You can cancel the process by using the CANCEL PROCESS command: cancel process process_number

ANR33 46I A process to deactivate backup files for a node was canceled.

Explanation

Cancellation is in progress. The process will end shortly.

System action

The process for deactivating backup files is ending, but server operation continues.

User response

No action is required.

ANR33 48E Command: The process of deactivating data for node name failed.

Explanation

An error occurred while deactivating backup files for the specified node.

System action

The DEACTIVATE DATA command is ended, but server operation continues.

User response

No action is required.

ANR33 49W Command: This command will deactivate data. Active backup files that were created for the specified node on the deactivation date or earlier will be deactivated.

Explanation

The DEACTIVATE DATA command deactivates backup files for a specified node.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to end the command.

ANR33 Locally defined domain *domain name* contains at least one node and cannot be replaced with a definition from the configuration manager.
50W

Explanation

During configuration refresh processing the indicated locally defined domain could not be replaced with a definition from the configuration manager. The domain definition was not replaced because the domain still contains one or more assigned nodes.

System action

Refresh processing continues, but this domain is not replaced. The system will attempt to replace the local domain during later configuration refresh operations.

User response

If you want existing nodes to be assigned to the domain from the configuration manager, you can temporarily assign them to another domain. After the domain definition has successfully been

propagated from the configuration manager, reassign the nodes to the new domain. Alternatively, if you want to prevent further attempts to replace the local domain definition during configuration refresh processing, delete the subscription to the profiles with which domain *domain name* is associated.

ANR33 Managed domain *domain name* contains at least one node and cannot be deleted during configuration refresh processing.
51W

Explanation

During configuration refresh processing, the enterprise configuration facility attempted to remove the indicated domain because it has been deleted from the configuration manager or because the profile association no longer exists. The domain could not be deleted on the managed server because it still contains one or more nodes.

System action

Refresh processing continues, but this domain is not deleted. The system will attempt to delete the domain during later configuration refresh operations.

User response

Assign nodes in this domain to another

domain. Alternatively, you can delete the subscription to the profiles with which domain *domain name* is associated.

ANR33 Locally defined domain *domain name* replaced during configuration refresh processing.
52I

Explanation

During configuration refresh processing, a local domain definition was replaced with a definition from the configuration manager. The system also deleted all policy sets, management classes, copy groups, and client schedules belonging to the locally defined domain and added definitions from the configuration manager.

System action

None.

User response

None.

ANR33 Managed domain *domain name* deleted during configuration refresh processing.
53I

Explanation

During configuration refresh processing, the indicated managed domain was removed from the managed server. This occurred either because the domain has been deleted from the

configuration manager or because the profile association no longer exists. The system also deleted all policy sets, management classes, copy groups, and client schedules belonging to the managed domain.

System action

None.

User response

None.

ANR33 Locally defined administrative schedule *schedule name* is active and cannot be replaced with a definition from the configuration manager.
54W

Explanation

During configuration refresh processing the indicated locally defined administrative schedule could not be replaced with a definition from the configuration manager. The schedule definition was not replaced because the schedule is in the active state.

System action

Refresh processing continues, but this administrative schedule is not replaced. The system will attempt to replace the local administrative schedule during later configuration refresh operations.

User response

If you want this administrative schedule to be replaced with the schedule definition from the configuration manager, deactivate the local schedule using the Update Schedule command. After the administrative schedule definition has successfully been propagated from the configuration manager, you can activate the new schedule. Alternatively, if you want to prevent further attempts to replace the local schedule definition during configuration refresh processing, delete the subscription to the profiles with which the schedule name is associated.

ANR33 55W Managed administrative schedule *schedule name* is active and cannot be deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the enterprise configuration facility attempted to remove the indicated administrative schedule because it has been deleted from the configuration manager or because the profile association no longer exists. The schedule could not be deleted on the managed server because the schedule is in the active state.

System action

Refresh processing continues, but this schedule is not deleted. The system will attempt to delete the administrative schedule during later configuration refresh operations.

User response

If you want this administrative schedule to be deleted in accordance with changes that have been made on the configuration manager, deactivate the managed schedule using the Update Schedule command. Alternatively, if you want to prevent further attempts to delete the managed schedule definition during configuration refresh processing, delete the subscription to the profiles with which the schedule name is associated.

ANR33 56I Locally defined administrative schedule *schedule name* replaced during configuration refresh processing.

Explanation

During configuration refresh processing, a local administrative schedule definition was replaced with a definition from the configuration manager.

System action

None.

User response

None.

ANR33 57I Managed administrative schedule *schedule name* deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the indicated managed administrative schedule was removed from the managed server. This occurred either because the schedule has been deleted from the configuration manager or because the profile association no longer exists.

System action

None.

User response

None.

ANR33 58W Locally defined administrator *administrator name* is the only system administrator and cannot be replaced with a definition from the configuration manager.

Explanation

During configuration refresh processing the indicated locally defined administrator could not be replaced with a definition from the configuration manager.

The administrator definition was not replaced because it is the only system administrator and the definition from the configuration manager does not include system authority.

System action

Refresh processing continues, but this administrator definition is not replaced. The system will attempt to replace the local administrator definition during later configuration refresh operations.

User response

If you want this administrator definition to be replaced with a definition from the configuration manager, you can grant system authority to another administrator. Alternatively, if you want to prevent further attempts to replace the local administrator definition during configuration refresh processing, delete the subscription to the profiles with which administrator *administrator name* is associated.

ANR33 59W Managed system administrator *administrator name* is the only system administrator and cannot be deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the enterprise configuration facility attempted to remove the indicated administrator because it has been deleted from the configuration manager or because the profile association no longer exists. The administrator could not be deleted on the managed server because it is the only system administrator.

System action

Refresh processing continues, but this administrator is not deleted. The system will attempt to delete the administrator during later configuration refresh operations.

User response

Grant system authority to another administrator. Alternatively, you can delete the subscription to the profiles with which administrator *administrator name* is associated.

ANR33 Managed 60W system administrator *administrator name* is the only system administrator - authority cannot be revoked during configuration refresh processing.

Explanation

During configuration refresh processing, the enterprise configuration facility attempted to revoke authority for the indicated administrator because authority has been revoked on the configuration manager. The authority of the administrator could not be revoked on the managed server because this is the only system administrator.

System action

Refresh processing continues, but authority is not revoked for this administrator. The system will attempt to revoke administrator during later configuration refresh operations.

User response

Grant system authority to another administrator. Alternatively, you can delete the subscription to the profiles with which administrator *administrator name* is associated.

ANR33 Locally defined 61I administrator *administrator name* replaced during configuration refresh processing.

Explanation

During configuration refresh processing, a local administrator definition was replaced with a definition from the configuration manager.

System action

None.

User response

None.

ANR33 Managed 62I administrator *administrator name* deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the indicated managed administrator was removed from the managed server. This occurred either because the administrator has been deleted from the configuration manager or because the profile association no longer exists.

System action

None.

User response

None.

ANR33 Managed 63W administrator *administrator name* is currently accessing the server and cannot be deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the enterprise configuration

facility attempted to remove the indicated administrator because it has been deleted from the configuration manager or because the profile association no longer exists. The administrator could not be deleted on the managed server because it currently has an active session with the server.

System action

Refresh processing continues, but this administrator is not deleted. The system will attempt to delete the administrator during later configuration refresh operations.

User response

Quit or cancel all sessions for the indicated administrator. Alternatively, you can delete the subscription to the profiles with which administrator *administrator name* is associated.

ANR33 Administrator 64W administrator *administrator name* has been removed. This administrator has defined or updated administrative schedules that will fail when executed.

Explanation

This message is issued during configuration refresh processing or as a result of a DELETE SUBSCRIPTION command with the DISCARD OBJECTS=YES

option. The indicated managed administrator was removed from the server, but this administrator owns one or more administrative schedules. These schedules will fail when executed in the future because they do not belong to a valid administrator.

System action

The indicated administrator was removed.

User response

Use the QUERY SCHEDULE command OR an SQL SELECT statement on the ADMIN_SCHEDULES table to determine which schedules were last updated by the administrator. Use the UPDATE SCHEDULE command to update those schedules under an administrator that has authority to execute them, or use the DELETE SCHEDULE command to remove the schedules.

ANR33 65I Locally defined command script command script name replaced during configuration refresh processing.

Explanation

During configuration refresh processing, a local command script definition was replaced with a definition from the configuration manager.

System action

None.

User response

None.

ANR33 66I Managed command script command script name deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the indicated managed command script was removed from the managed server. This occurred either because the script has been deleted from the configuration manager or because the profile association no longer exists.

System action

None.

User response

None.

ANR33 67I Locally defined option set option set name replaced during configuration refresh processing.

Explanation

During configuration refresh processing, a local option set definition was replaced with a definition from the configuration manager.

System action

None.

User response

None.

ANR33 68I Managed option set option set name deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the indicated managed option set was removed from the managed server. This occurred either because the option set has been deleted from the configuration manager or because the profile association no longer exists.

System action

None.

User response

None.

ANR33 69I Locally defined server group group name replaced during configuration refresh processing.

Explanation

During configuration refresh processing, a local server group definition was replaced with a definition from the configuration manager.

System action

None.

User response

None.

ANR33 70I Managed server group group name deleted during configuration refresh processing.

Explanation

During configuration refresh processing, the indicated managed server group was removed from the managed server. This occurred either because the server group has been deleted from the configuration manager or because the profile association no longer exists.

System action

None.

User response

None.

ANR33 71W Server group group name cannot be defined during configuration refresh processing because a server already exists with this name.

Explanation

During configuration refresh processing, the enterprise configuration facility attempted to define the indicated server group on a managed server. The server group could not be defined because a server definition with the same

name already exists on the managed server.	refresh processing.	cannot be deleted during configuration refresh processing.	configuration refresh processing.
System action	Explanation	Explanation	Explanation
Refresh processing continues, but this server group is not defined. The system will attempt to define the server group during later configuration refresh operations.	During configuration refresh processing, the definition for managed object <i>server name</i> was removed from the managed server. This occurred either because <i>server name</i> has been deleted from the configuration manager or because the profile association no longer exists.	During configuration refresh processing, the enterprise configuration facility attempted to remove the indicated server definition because it has been deleted from the configuration manager or because the profile association no longer exists. The indicated server could not be deleted on the managed server because <i>server name</i> is in use. This could occur if the managed server has an active connection to <i>server name</i> or if the managed server has a device class with DEVTYPE=SERVER that refers to <i>server name</i> .	During configuration refresh processing, the enterprise configuration facility attempted to remove the indicated server definition because it has been deleted from the configuration manager or because the profile association no longer exists. The indicated server could not be deleted on the managed server because it is the event server for the managed server.
User response	System action	System action	System action
You can delete the subscription to the profile with which the indicated server group is associated or delete the conflicting server definition on the managed server. Alternatively, you can rename the server group on the configuration manager, after first deleting the profile association for that server group.	None.	Refresh processing continues, but this server definition is not deleted. The system will attempt to delete the server during later configuration refresh operations.	Refresh processing continues, but this server definition is not deleted. The system will attempt to delete the server during later configuration refresh operations.
ANR33 72I Locally defined server <i>server name</i> replaced during configuration refresh processing.	ANR33 74I Server group <i>group name</i> replaced with server <i>server name</i> during configuration refresh processing.	ANR33 76W Server <i>server name</i> is the event server and cannot be deleted during	ANR33 77W Replacement of local server <i>server name</i> with a definition from the configuration manager is not allowed.
Explanation	Explanation	User response	User response
During configuration refresh processing, a local server definition was replaced with a definition from the configuration manager.	During configuration refresh processing, a server group definition was replaced with a server definition from the configuration manager. The server has the same name as the deleted server group.	Before <i>server name</i> can be deleted, the managed server must not have a connection to that server and the managed server cannot have any device-class references to that server.	Before <i>server name</i> can be deleted, the DELETE EVENTSERVER command must be used to remove the event server reference to <i>server name</i> .
System action	System action	Explanation	Explanation
None.	None.	During configuration refresh processing, the enterprise configuration facility attempted to	During configuration refresh processing, the enterprise configuration facility attempted to
User response	User response		
None.	None.		
ANR33 73I Server <i>server name</i> deleted during configuration	ANR33 75W Server <i>server name</i> is currently in use		

replace the indicated server definition with a definition from the configuration manager. This operation could not be performed because ALLOWREPLACE=NO for the indicated server.

System action

Refresh processing continues, but this server definition is not replaced. The system will attempt to replace the server definition during later configuration refresh operations.

User response

Before the local server definition for *server name* can be replaced with a definition from the configuration manager, the UPDATE SERVER command must be used to set the ALLOWREPLACE attribute to ON.

ANR33 Administrator 78I *administrator name added during configuration refresh processing.*

Explanation

During configuration refresh processing, the indicated administrator definition was created based on information from the configuration manager.

System action

None.

User response

None.

ANR33 Command: 79E *Unable to access pool pool name - access mode is set to "read only".*

Explanation

The command shown specifies the pool whose name is displayed, but the pool cannot be accessed because its status is read only.

System action

The server does not process the command.

User response

Either reset the access state of the pool or choose another pool and reissue the command.

ANR33 Command: 80E *Unable to access pool pool name - access mode is set to "unavailable".*

Explanation

The command shown specifies the pool whose name is displayed, but the pool cannot be accessed because its status is unavailable.

System action

The server does not process the command.

User response

Either reset the access state of the pool or choose another pool and reissue the command.

ANR33 This command 81W *will remove administrator*

user ID. This administrator is defined to alert triggers or assigned to alerts. The command will remove the administrator from those alert triggers and alerts.

Explanation

A REMOVE ADMINISTRATOR command was issued for the specified administrator. If you confirm the command, the administrator will be removed from the alert triggers and alerts.

System action

The system will run or cancel the command, depending on your response.

User response

To run the REMOVE ADMINISTRATOR command, enter 'Y'. To cancel the command, enter 'N'. To find the alert triggers to which the administrator is defined, use the QUERY ALERTTRIGGER command or an SQL SELECT statement on the TSM_MON_ALERTTRIG table. To find the alerts that are assigned to the administrator, use the QUERY ALERTSTATUS command or an SQL SELECT statement on the TSM_MON_ALERT table. To update the alert triggers and modify the list of administrators who receive an email for the alerts, use the

UPDATE ALERTTRIGGER command. To assign the alert to another administrator, use the UPDATE ALERTSTATUS command.

ANR33 This command 82W *will rename administrator user ID. This administrator is defined to alert triggers or assigned to alerts. If this administrator is renamed, the administrator of the alert triggers and alerts will also be renamed.*

Explanation

A RENAME ADMINISTRATOR command was issued for an administrator who is defined to alert triggers or assigned to alerts. If you confirm this command, the administrator for those alert triggers and alerts will be renamed.

System action

The system will run or cancel the command, depending on your response.

User response

To run the RENAME ADMINISTRATOR command, enter 'Y'. To cancel the command, enter 'N'. To review alerts that are assigned to the administrator, use the QUERY ALERTSTATUS command. To manage alerts that are assigned to the administrator, use the UPDATE ALERTSTATUS

command. To review alert triggers, use the QUERY ALERTTRIGGER command. To update alert triggers, use the UPDATE ALERTTRIGGER command.

ANR33 83E *command:*
Administrator user ID is the monitoring administrator and cannot be removed or renamed.

Explanation

Because the specified administrator is used for communications between hub and spoke servers, the administrator cannot be removed or renamed.

System action

The command fails, and server operation continues.

User response

To remove or rename the administrator, complete the following steps: 1. Issue the SET MONITORINGADMIN command to change the monitoring administrator for your hub server and for corresponding spoke servers. 2. Remove or rename the administrator.

ANR33 84E *command:*
Server group group name, is the monitored server group and cannot be deleted or renamed.

Explanation

The specified server group is in use as the

monitored server group and cannot be deleted or renamed.

System action

The command fails and server operation continues.

User response

Use the SET MONITOREDSEVERGRO UP command to remove it as the monitored server group. Then you can delete or rename the server group.

ANR33 85E *command:* **The command failed because the operation is not allowed for container storage pools.**

Explanation

The specified storage pool is a container storage pool. You cannot issue the following commands with container storage pools:

- AUDIT VOLUME
- BACKUP STGPOOL
- IDENTIFY DUPLICATES
- MIGRATE STGPOOL
- MOVE DATA
- MOVE NODEDATA
- PREPARE
- RECLAIM STGPOOL
- RESTORE STGPOOL
- RESTORE VOLUME

In addition, you cannot issue the UPDATE COPYGROUP command and specify a container storage pool on the TOCDESTINATION parameter. You also cannot issue the

ACTIVATE POLICYSET command for a policy set that includes a copy group that has a container storage pool defined on the TOCDESTINATION parameter.

System action

The command fails, but server operation continues.

User response

Reissue the failed command with valid parameters.

ANR33 86E **Insufficient authority to create file system object object name.**

Explanation

An attempt to create a file or directory failed with insufficient authority.

System action

The operation fails and server operations continue.

User response

Check the permissions of the directory leading up to the object being created. Ensure the userid under which the server is executing has the necessary permission to create objects in this directory. Retry the operation.

ANR33 87W *Command:* **This command will add, update, or delete alert triggers.**

Explanation

A command has been issued that will add, update, or delete alert triggers on your server.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to end the command.

ANR33 88W *Command:* **This command decommissions the client node and deletes data. Active files are deactivated, and data is deleted as it expires.**

Explanation

A command has been issued that will decommission the node.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to end the command.

ANR33 89E *Command:* **Node name is already decommissioned.**

Explanation

You cannot decommission the node because it is already decommissioned with decommission state YES.

System action

The server does not process the command.

User response

You can use QUERY NODE FORMAT=DETAIL command to see the decommission state of the node and the date it was decommissioned. You can reissue the command on a node that does not have decommissioned state of Yes.

ANR33 Alert trigger 90W message number is no longer valid and will be deleted.

Explanation

The alert trigger is obsolete because it is associated with a server message that no longer exists.

System action

The alert trigger will be automatically deleted by the server. Server operation continues.

User response

No action is required.

ANR33 command: The 91E operation is not allowed for cloud storage pools.

Explanation

The specified storage pool has a cloud storage type. You cannot issue the following commands with cloud storage pools:

- BACKUP STGPOOL

- RESTORE STGPOOL
- MIGRATE STGPOOL
- IDENTIFY DUPLICATES
- RECLAIM STGPOOL
- PREPARE

You must use a primary random, primary sequential, copy, or active-data storage pool to complete these functions.

System action

The command fails and the server operation continues.

User response

To back up a storage pool that uses a DEDUP device class, issue the PROTECT STGPOOL command to protect the contents of the storage pool.

ANR33 Command: This 92W command will decommission the specified virtual machine. The active files that belong to the virtual machine will be inactivated, and the file space of the virtual machine will be automatically deleted after its all the files are expired.

Explanation

A command was issued to remove the specified virtual machine from the production environment.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR33 Command: 93E Virtual machine virtual machine name in node name is already decommissioned.

Explanation

The specified virtual machine cannot be decommissioned because it already has a decommission state of Yes.

System action

The virtual machine remains decommissioned and server operation continues.

User response

To view the date when the virtual machine was decommissioned, issue the following command: query filespace format=detailed To decommission a different virtual machine, reissue the DECOMMISSION VM command for that virtual machine.

ANR33 Process process 94I ID was started to decommission virtual machine virtual machine name on node name.

Explanation

When you run the DECOMMISSION VM command, a process is started to prepare the virtual machine for the decommission operation and to deactivate backup files for the virtual machine.

System action

The decommission process is in progress.

User response

No action is required. However, you can query the process by using the QUERY PROCESS command: query process process_number You can cancel the process by using the CANCEL PROCESS command: cancel process process_number

ANR33 The process of 95I decommissioning a virtual machine was canceled.

Explanation

The CANCEL PROCESS command was issued to end the decommission operation. The operation will end shortly.

System action

The decommission operation will end, but server operation continues.

User response

No action is required.

ANR33 Command: An 97E error occurred while

deactivating data for virtual machine *virtual machine name*.

Explanation

An error occurred while deactivating backup files for the specified virtual machine.

System action

The DECOMMISSION VM command halts, but server operation continues.

User response

No action is required. However, to resolve the issue, review the dsdffdc.log and dsmserv.err files and correct any reported errors.

ANR33 Command: File
98E space *FSID*
could not be found.

Explanation

The file space ID is not valid.

System action

The server does not process the command, but server operation continues.

User response

To resolve the issue, complete the following steps: 1. To obtain the file space ID of the virtual machine, issue the following command: query filespace 2. Reissue the command on the virtual machine.

ANR33 Command:
99E Virtual machine
virtual machine name
could not be found.

Explanation

The command failed because the virtual machine name is invalid.

System action

The server does not process the command, but server operation continues.

User response

To resolve the issue, complete the following steps: 1. Issue the following command: select * from filespaceview 2. To determine the name of the virtual machine, review the output: - If the ENTITYNAME field is not blank, the name in the field is the virtual machine name. - If the ENTITYNAME field is blank, go to the FILESPACE_NAME field to determine the name of the virtual machine. 3. Reissue the command on the virtual machine.

ANR34 Command:
00I Output stream
stream used
volume *volume name*.

Explanation

The specified output stream used the specified volume.

System action

The command continues.

User response

None.

ANR34 Command:
01I Output stream
stream did not
write to any
output volumes.

Explanation

The specified output stream did not write to any output volumes.

System action

The command continues.

User response

None.

ANR34 Extractdb
02I command:
Process *process number*,
database
extract, has
completed.

Explanation

The database extract process *process number* has completed.

System action

Database extract processing ends.

User response

None.

ANR34 Extractdb
03I command:
Found *number of database objects*
database
objects.

Explanation

This message indicates the total number

of database objects that were found during database extract processing.

System action

Server processing continues.

User response

None.

ANR34 Extractdb
04I command:
Processed
number of database objects
database
objects.

Explanation

This message indicates the total number of database objects that were successfully processed during database extract processing.

System action

Server processing continues.

User response

None.

ANR34 Extractdb
05I command:
Skipped *number of database objects* empty
database
objects.

Explanation

This message indicates the total number of database objects that were skipped during database extract processing because they contained no records.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
06I command:**
Failed to process number of database objects database objects.

Explanation

This message indicates the total number of database objects that were not successfully processed during database extract processing.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
07I command:**
Processed number of database records database records.

Explanation

This message indicates the total number of database records that were successfully extracted during database extract processing.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
08I command:**
Wrote number of bytes bytes.

Explanation

This message indicates the total number of bytes that were successfully written during database extract processing.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
09I command:**
Elapsed time was elapsed time.

Explanation

This message indicates the total amount of time that elapsed during database extract processing.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
10I command:**
Throughput was megabytes per

hour megabytes per hour.

Explanation

This message indicates the total throughput (megabytes/hour) during database extract processing.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
11I command:**
Extracted number of database records database entries and wrote number of bytes bytes in elapsed time (megabytes per hour megabytes per hour).

Explanation

The command read the indicated number of database records, and wrote the indicated number of bytes.

System action

Server processing continues.

User response

None.

**ANR34 Extractdb
12I command:**
Terminating output stream stream number due to error on

server server name.

Explanation

An error was encountered on the target server during a server-to-server upgrade process, resulting in the termination of the output stream being used to send database information to the target server.

System action

The command terminates.

User response

Refer to the target server's messages for a description of the error. Correct the error and rerun the command.

**ANR34 Extractdb
13W command:**
Encountered an unexpected table, table name. The table will be skipped.

Explanation

The database extract process encountered a table that it did not expect. In most cases, an unexpected table is one that was used in an earlier release, but which is no longer used in the current release. Such tables can be safely ignored by the database extract process. However, in rare cases, this may indicate a programming error. As such, you should contact your service representative to confirm whether the table may be ignored without affecting

the success of the upgrade process.

System action

Database extract processing continues. Data from the specified table is not extracted.

User response

Contact your service representative to confirm whether the specified table can be safely ignored.

ANR34 Extractdb 14E *command: Process process number, database extract, has completed with errors.*

Explanation

The database extract process *process number* has completed, but errors were encountered by the process.

System action

Database extract processing ends.

User response

Review any messages that were issued by the process, and take corrective action as appropriate.

ANR34 The server is in 15I *maintenance mode.*

Explanation

The server is in maintenance mode. The following services are disabled:

- Client sessions
- The scheduler
- Automatic inventory expiration
- Automatic volume reclamation
- Automatic storage pool migration

System action

Server operation continues; however restricted services are disabled.

User response

If you want to exit maintenance mode, use the HALT command to stop the server, and restart it.

ANR34 The server is in 16I *maintenance mode. Client sessions cannot be enabled.*

Explanation

The server is in maintenance mode. Client sessions are disabled and cannot be reenabled until normal operation resumes.

System action

Client sessions are not enabled.

User response

If you want to exit maintenance mode, use the HALT command to stop the server, and restart it.

ANR34 Database 17W *backup page verification is disabled.*

Explanation

Pages that are backed up from the Db2 database are not being verified. A possible cause is that IBM Software Support requested or enabled this change.

System action

The database backup continues, but invalid or corrupted database pages might not be detected.

User response

If IBM Software Support directed you to disable database backup page verification, no action is required.

If IBM Software Support did not direct you to disable database backup page verification, reenable the feature to gain the additional protection that it provides.

ANR34 Invalid storage 18W *pool directory specified: stgpooldir Error: Error.*

Explanation

The storage pool directory specified in the DEFINE STGPOOLDIRECTORY command does not exist or has invalid permissions.

System action

The command is processed, but the storage pool directory is marked as UNAVAILABLE.

User response

To store data in the storage pool directory, verify that the directory exists and has valid permissions. Then, update the access state of the storage pool directory to READWRITE.

ANR34 Directory name 19E *directory name was duplicated when the parameter command was issued.*

Explanation

When you define or update multiple directories for a container storage pool, you can specify a directory name only once in the command.

System action

The command fails. Server operation continues.

User response

Ensure that the directory name is specified only once in the command.

ANR34 Command: Node 20E *name is not a valid application type node.*

Explanation

You cannot deactivate a node which is not valid application type node.

System action

The server does not process the command.

User response

None.

**ANR34 Invalid access
21E state for storage
pool directory
stgpooldir.**

Explanation

There is an invalid access state to complete the operation for the storage pool directory. The required access state is READWRITE.

System action

The operation fails and server operations continue.

User response

Verify that the directory has the correct write-access. Then, issue the UPDATE STGPOOLDIRECTORY command for the storage pool directory and specify the ACCESS=READWRITE parameter.

**ANR34 Invalid access
22W state for storage
pool directory
stgpooldir.**

Explanation

The access state for the storage pool directory is invalid. The access state must be READONLY or READWRITE to complete this operation.

System action

The operation fails and server operations continue.

User response

Verify that the directory has at least read access. Then, issue the UPDATE STGPOOLDIRECTORY command for the storage pool directory and specify the ACCESS=READWRITE or ACCESS=READONLY parameter.

**ANR34 Proxy Session
23E session number
was not
initiated by an
authorized user.**

Explanation

A Proxy Session must be run as an authorized user. An authorized user is any non-root user who has read and write access to the client stored password (TSM.PWD file), or anyone who knows the client password and enters it interactively. Authorized users can use the client passworddir option to define the directory where their copy of the TSM.PWD file is saved.

System action

The session is ended. System processing continues

User response

Re-configure your client session as an authorized user or connect to the server or storage agent as an authorized user.

**ANR34 Command: You
24E must specify a
directory-
container
storage pool.
Storage pool
stgpool name is
not a directory-**

**container
storage pool.**

Explanation

The command is valid only for a directory-container storage pool.

System action

The server does not process the command.

User response

Specify the name of a directory-container storage pool with the command.

**ANR34 Data in
25W container-copy
storage pool
volume volume
name cannot be
retrieved -
access mode is
not READWRITE
or READONLY.**

Explanation

During processing of a REPAIR STGPOOL command, data in a container-copy storage pool volume cannot be restored because the volume's access mode is not READWRITE or READONLY.

System action

The server repairs damaged extents using copies in the container-copy storage pools that it can access, but it skips over damaged extents that exist only on offsite volumes.

User response

If the volume is stored at an offsite location,

bring the volume onsite. Use the MOVE DRMEDIA command to change the access mode for the volume to READWRITE or READONLY, and reissue the REPAIR command.

**ANR34 Container-copy
26I storage pool
volume volume
name is
required for
repair
processing.**

Explanation

During processing of a REPAIR STGPOOL command, the server determines that a removable volume is required.

System action

Unless this is a preview process, the server attempts to mount the removable volume.

User response

Respond to any mount request for the indicated volume.

**ANR34 Command:
27E Storage pool
storage pool
name does not
have data
protected to its
local container-
copy storage
pools.**

Explanation

The command indicated references a storage pool that has not been protected by the LOCAL PROTECT.

System action

The server does not process the command.

User response

Reissue the command after protecting data from the storage pool specified to its container copy storage pools.

ANR34 Command: 28E Unable to encrypt storage pool storage pool name - encryption is unavailable for the storage pool.

Explanation

The storage pool cannot be encrypted because the encryption is unavailable for this storage pool.

System action

The server does not process the command.

User response

Enable encryption for this storage pool by issuing the UPDATE STGPOOL command and specifying the ENCRYPT=YES parameter.

ANR34 Command: 29E Storage pool Pool Name has an invalid type for operation Operation.

Explanation

This storage pool is not a valid pool type for this stgrule action.

System action

The server does not process the command.

User response

Specify the name of a storage pool with a valid type for the stgrule action being performed.

ANR34 Command: 30E You must specify a cloud-container storage pool that is enabled for action type action_type. Storage pool stgpool name is a cloud type cloud-container storage pool and is not enabled.

Explanation

You can issue this command for cloud-container storage pools that use Microsoft Azure or Simple Storage Service (S3) protocol only.

System action

The server does not process the command.

User response

Specify the name of a cloud-container storage pool with a cloud type of either AZURE or S3.

ANR34 Command: 31E Unable to access pool pool name - access mode is set to "destroyed".

Explanation

The command shown specifies the pool whose name is displayed, but

the pool cannot be accessed because its status is destroyed.

System action

The server does not process the command.

User response

Either reset the access state of the pool or choose another pool and reissue the command.

ANR34 Command: 32E Retention pool pool name - is not valid in a storage rule.

Explanation

The command shown specifies a retention pool whose name is displayed, but the retention pools cannot be used as part of a storage rule.

System action

The server does not process the command.

User response

Choose a non-retention pool and reissue the command.

ANR34 command: 33E The operation is not allowed for retention storage pools.

Explanation

The specified storage pool has a retention storage type. You cannot issue the following commands with retention storage pools:

- BACKUP STGPOOL
- COPY ACTIVATEDATA

- RESTORE STGPOOL
- MIGRATE STGPOOL
- IDENTIFY DUPLICATES
- PREPARE

You must use a primary random, primary sequential, copy, or active-data storage pool to complete these functions.

System action

The command fails and the server operation continues.

User response

To back up data in a retention storage pool, create multiple retention sets for the nodes and file spaces in the primary storage pools.

ANR34 Command: 34W This command recommissions the client node. The node will no longer be in a decommissioned state.

Explanation

A command has been issued that will recommission the node previously decommissioned by the DECOMMISSION NODE command. The decommission state will be reset and the node unlocked. After the node is recommissioned, you can replicate the client node to a target server and complete other operations that are available for nodes that are not decommissioned.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to end the command.

ANR34 35E *Command: Node name is not a decommissioned node.*

Explanation

You cannot recommission the specified node because the node has not been decommissioned or the decommission operation is pending.

System action

The server does not process the command.

User response

To determine the decommissioned state of a node and the date that it was decommissioned, issue the QUERY NODE nodename FORMAT=DETAIL command and review the DECOMMISSIONED and DECOMMISSIONED DATE values. If the DECOMMISSIONED value is PENDING, you can issue the DECOMMISSION NODE command to finish decommissioning the node, then reissue the RECOMMISSION NODE command. You can reissue the RECOMMISSION NODE command for any node that has a DECOMMISSIONED value of YES.

ANR34 36E *The required configuration files were not copied from cloud storage.*

Explanation

One or more of the required configuration files either were either not present in or failed to be copied from cloud storage. Ensure that the parameter settings correspond to an accessible cloud location that hosts a database backup, and that the user has permission to read from that cloud location.

System action

Server operations continue, but the server does not process the command.

User response

Reissue the command with valid parameters.

ANR34 37I *During a database restore operation, file old_name was renamed to new_name. Depending on your organization's requirements, you can either keep or delete the renamed file.*

Explanation

The file was renamed to prevent it from being overwritten by a configuration file from the cloud.

System action

The database restore operation continues.

User response

No action is required. However, if the renamed file is not needed, you can delete it.

ANR34 38W *Command: This command will recommission the specified virtual machine.*

Explanation

A command was issued to recommission the specified virtual machine that was previously decommissioned with the DECOMMISSION VM command.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR34 39E *Command: Virtual machine virtual machine name for node name is not decommissioned.*

Explanation

You cannot recommission the specified virtual machine because the virtual machine has not been decommissioned or the decommission operation is pending.

System action

The server does not process the command.

User response

To determine the decommissioned state of a virtual machine and the date that it was decommissioned, issue the QUERY FILESPACE with FORMAT=DETAIL command and review the DECOMMISSIONED and DECOMMISSIONED DATE values. If the DECOMMISSIONED value is PENDING, you can issue the DECOMMISSION VM command to finish decommissioning the virtual machine, then reissue the RECOMMISSION VM command. To recommission a different virtual machine, reissue the RECOMMISSION VM command for that virtual machine.

ANR34 40W *The client operation was not completed successfully for node node name in schedule schedule name. The schedule is associated with policy domain domain name, and the client node is on host host name. Session session number ended with completion code completion code.*

Explanation

The completion code indicates the type of issue that occurred.

System action

Server operation continues.

User response

Review the completion code to determine the issue.

ANR34 41E Cloud operations are currently unavailable in the IBM Storage Protect environment, and the communication with the Operations Center is interrupted. Because of insufficient continuous memory, the server could not start a Java Virtual Machine (JVM). The JVM is required to support communication with cloud object storage providers and the Operations Center.

Explanation

The server lacks the 2 GB of continuous memory that is required to start a JVM. JVM. This failure can occur on long-running servers even if sufficient noncontinuous memory is available.

System action

Server operations continue, but data cannot be backed up to or restored from cloud storage, and communications with the Operations Center are interrupted.

User response

To resolve the issue, take one of the following actions:

- Ensure that the server is properly provisioned with continuous memory. For instructions about provisioning memory, search for "Managing memory and processor usage" in the online product information (<https://www.ibm.com/docs/en/spectrum-protect>).
- Restart the server and retry cloud operations such as backing up data to cloud storage or communications with the Operations Center. By restarting the server, you can provide sufficient memory to start the JVM. Because memory can become fragmented over weeks or months, it is useful to restart the server without delay before memory becomes fragmented.

ANR34 42E The REMOVE REPLNODE command was not processed because server, server name is not a valid target replication server. You must

specify a valid target replication server for the REMOVE REPLNODE command.

Explanation

The REMOVE REPLNODE command was not processed either because the specified server is not a target replication server or the server name was entered incorrectly.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command with a valid target replication server name.

ANR34 43W When the REMOVE REPLNODE command was run, one or more nodes (node names) were skipped because they are not configured to replicate data to the specified server server name.

Explanation

The specified nodes were skipped because the nodes have no replication association with the specified server.

System action

The command was processed but the specified nodes were skipped.

User response

Reissue the REMOVE REPLNODE command with a valid target replication server for the specified nodes.

ANR34 44W When the REMOVE REPLNODE command was issued, one or more nodes (node names) were skipped because the SERVER parameter value was not specified for these nodes. A SERVER parameter value is mandatory for nodes that are configured for replication.

Explanation

When you run the REMOVE REPLNODE command for a node that is configured for replication with one or more target replication servers, you must specify the SERVER parameter value.

System action

The command was processed but any specified nodes were skipped.

User response

Reissue the REMOVE REPLNODE command with a valid target replication server for the specified nodes.

ANR34 45I If a node has no replication associations with any servers, you must specify an empty string (server="") for the SERVER parameter for the REMOVE REPLNODE command to reset a node's replication state. If the node has a replication association with one or more servers, you must specify a valid target replication server name.

Explanation

To help ensure that the REMOVE REPLNODE command is processed correctly, you must specify the SERVER parameter value if a node has a replication association. If a node does not have a replication association, you must specify an empty string for the SERVER parameter.

System action

Server operation continues.

User response

No action is required.

ANR34 46W Some data might not be migrated because a file size limit is set for the target storage pool, storage pool name.

Explanation

If you define a cold-data-cache storage pool and limit the file size by setting a value for the MAXSIZE parameter, some data might not be migrated to the target storage pool.

System action

System operation continues. To help ensure that all data can be migrated, set the MAXSIZE parameter value to the default value, NOLIMIT.

User response

To resolve the issue, take one of the following actions:

- Specify a sufficiently high value for the MAXSIZE parameter to help ensure that all data can be migrated.
- Specify the default value, NOLIMIT, for the MAXSIZE parameter.

ANR34 47E Command: Storage pool stgpool name has cloud data lock enabled and cannot use action_type action_type. You must specify a cloud-container storage pool that does not

have cloud data lock enabled.

Explanation

Cloud-container reclamation cannot be implemented when the storage pool has cloud data lock enabled.

System action

The server does not process the command.

User response

Specify the name of a cloud-container storage pool that does not have cloud data lock enabled.

ANR34 48W All the data could not be replicated. The Node node is an object-client node and it contains data that is defined as a GLACIER storage class, which cannot be replicated. The number of files skipped is Skip count.

Explanation

The specified node you are replicating is defined as an object client that contains data defined as a GLACIER storage class. This combination is not supported for replication.

System action

All the data that belongs to GLACIER class will be skipped and the data belonging to STANDARD class will be replicated.

User response

To resolve the issue, verify that you backup your data with the STANDARD storage class.

ANR34 85W The hub server is running an earlier version than the spoke server.

Explanation

The version of IBM Storage Protect server that is installed on the hub server must be at least the same version that is installed on a spoke server.

System action

The hub server continues to receive alerts and status information from the spoke server, but unexpected behavior might occur.

User response

Upgrade the version of IBM Storage Protect server that is running on the hub server. It must be at least the same version as the spoke server.

ANR34 86I CANCEL SESSION ALL command processing ended sooner than expected.

Explanation

It is possible that the server was unable to cancel all sessions because a session was encountered that could not be cancelled. Some sessions may still remain active after the command completes.

System action

Server operation completes.

User response

Specify a session_number with the CANCEL SESSION command to cancel a specific CLIENT session. If a SERVER session is active, the partner server must be quiesced for the session to end. The SERVER session may be active with a Storage Agent, Library Client, Library Server or Virtual Volume server. To prevent new sessions from starting, see the DISABLE SESSIONS command.

ANR34 Command: The 87E number of administrators exceed the maximum number allowed.

Explanation

The number of administrators that can receive alert summary by email is limited to three.

System action

The command fails.

User response

Reissue the command specifying a maximum of three registered administrator names.

ANR34 Command: The 88W administrator administrator name does not have an email address.

Explanation

The administrator does not have an email address defined. The specified administrator cannot receive email from the server until a valid email address is defined.

System action

The command processing continues.

User response

Issue UPDATE ADMIN command to define the email address and reissue the command.

ANR34 Command 89I completed successfully.

Explanation

The specified SET command completed successfully.

System action

None.

User response

None.

ANR34 Command 90E completed with failure.

Explanation

The specified SET command did not complete successfully.

System action

The server ignores the command.

User response

Verify that values are valid and reissue the command.

ANR34 No sender email 91E address found - unable to send email for alert, message num.

Explanation

The server is unable to send an email to the administrators for the specified alert because an email address of the sender could not be found.

System action

Server operation continues.

User response

Use the QUERY MONITORSETTINGS command to display the current sender's email address. Use the SET ALERTEMAILFROMADDR command to specify a valid sender email address.

ANR34 Command: 92W Administrator administrator name is not configured to receive alerts by email.

Explanation

The specified administrator name is not set up to receive alerts by email. Alerts cannot be sent to the administrator until it is configured to receive alerts by email.

System action

Server operation continues.

User response

Use QUERY ADMIN FORMAT=DETAIL to display the current settings for the administrator. Verify that the administrator has ALERT=YES and has a valid email address. Use the UPDATE ADMIN command to update the settings.

ANR34 Error sending an 93E email for alert msg number to the administrator with email address email address using the SMTP server name SMTP host server and SMTP port port number.

Explanation

An email about an alert was not sent successfully to the administrator with the specified email address.

System action

Server operation continues.

User response

Use QUERY MONITORSETTING command to see the current settings for emailing an alert. Check that the administrator's email address and SMTP host server name are correct. Check that the SMTP port is correct.

Fix any incorrect settings. The next alert that is triggered will use the new configuration settings. You can also check the server's ffdc log for any additional information about the error.

ANR34 Command: No administrators added or deleted for the alert trigger.

Explanation

The specified command has been issued but no administrators are added or deleted for the alert trigger.

System action

Server operation continues, but the command has no effect.

User response

If you are adding an administrator reissue the command specifying an administrator name that is registered on the server. If you are deleting an administrator reissue the command specify one of the administrator names defined to the alert trigger.

ANR34 Command: 95I Administrator admin name is not defined to alert trigger.

Explanation

The administrator name cannot be deleted because it is not defined to the specified alert trigger.

System action

The administrator name is skipped and the server operation continues.

User response

Reissue the command specifying an administrator name that is defined to the alert trigger.

ANR34 An invalid value, 96W option value, is specified for option option name, The reason code is reason code.

Explanation

Reason code 1 means that this table name is not allowed for the option. Reason code 2 means that this table does not exist in the database.

System action

Server operation continues.

User response

Verify that the correct value is used. Update the value, if necessary.

ANR34 Reorganization 97W is required on excluded table table name. The reason code is reason code.

Explanation

The server has determined that reorganization is required on a table or index that has been excluded from online reorganization by the server or a server option. Reason code 1

means that table reorganization is required on the listed table. And this table is currently excluded from online reorganization processing because it is either specified in the DISABLEREORGTABLE server option or is one of the following tables: STAGED_EXPIRING_OBJECTS, STAGED_OBJECT_IDS (which are permanently excluded by the server from online table reorganization. Reason code 2 means that index reorganization is required for the listed table. And index reorganization is excluded because it is either specified in the DISABLEREORGIndex server option or is against one of the following tables:

STAGED_EXPIRING_OBJECTS, STAGED_OBJECT_IDS, REPLICATED_OBJECTS (which are permanently excluded by the server from online index reorganization. Reason code 3 means that index reorganization with the CLEANUP PAGES ALL option is required. This reason is only valid for the BF_BITFILE_EXTENTS table when it is specified in the DISABLEREORGCleanupIndex server option.

System action

Server operation continues.

User response

Tables and indices not reorganized when needed can lead to database growth and server

performance degradation over time. If you experience either of these symptoms, and receive this message consideration should be given to running an offline reorganization of the given table or index. Details and instructions on running an offline reorganization can be found in technote 1452146 under the section "Running an offline table or index reorg": <http://www.ibm.com/support/docview.wss?uid=swg21452146>

ANR34 One-time 98W setting of the server reorganization options is performed.

Explanation

The following server options are set after the server starts for the first time: 1) The DISABLEREORGTABLE option is set with no tables specified. As a result, no tables are excluded from the table-reorganization processing. 2) The DISABLEREORGINDEX option is set to ARCHIVE_OBJECTS, BACKUP_OBJECTS, BF_AGGREGATED_BITFILES, and BF_BITFILE_EXTENTS. As a result, index reorganization will not be run on these tables. 3) The DISABLEREORGCLEANUPINDEX is set with no tables specified. As a result, INDEX REORG with the CLEANUP PAGES ALL option will be run on

the
BF_BITFILE_EXTENTS
table. This process of
updating the server
options file runs only one
time, which is after the
server starts for the first
time.

System action

Server operation
continues.

User response

If you do not want the
one-time reorganization
processing to occur, issue
the following commands
from a Db2 command
window: db2 connect to
tsmdb1 db2 "insert into
tsmdb1.global_attributes
(owner,name,type,length,i
nt32)
values('RDB','REORG_ON
ETIME_AUTO_INIT',3,0,2
)" The commands can be
issued on any Version 6
server or at the fixing
level for APAR IC95301,
before you start the
server.

ANR34 command:
99E Scratchpad
entry already
exists.

Explanation

A scratchpad entry with
the specified keys already
exists.

System action

The server ignores the
command.

User response

Either define a new
scratchpad entry with
unique keys or update the
existing scratchpad entry.

ANR35 Backup set for
00I node node name
as set name
(data type data
type) being
generated.

Explanation

The named object set
is being created for the
specified node.

System action

The server generates a
backup set.

User response

None.

ANR35 Backup set for
01I node name as
set name (data
type data type)
completed
successfully -
processed files
files.

Explanation

The named object set was
successfully created for
the specified node. The
number of files processed
is specified.

System action

None.

User response

None.

ANR35 Backup set for
02W node name as
set name (data
type data type)
completed with
file processing
errors -
processed files
files with error
files files
skipped.

Explanation

The named object
set was successfully
created for the specified
node. However, during
processing errors were
encountered accessing
some files - these files
were skipped.

System action

None.

User response

Evaluate other server
messages for an
indication of why the
files were skipped. Files
can be skipped because
of failures locking those
files, having no files to
process, or for other
more serious problems.
First, retry the command
and see if it completes
without any skipped files.
If you are unable to
generate the backup set
without skipping files,
please contact your local
service representative for
assistance.

ANR35 Generation of
03E backup set for
node name as
set name (data
type data type)
failed.

Explanation

The named object for the
specified node was not
created. An error was
encountered causing the
creation of this object
set not to complete
successfully.

System action

Server operation
continues.

User response

Evaluate other messages
that were issued and
try to determine the
cause of the failure. After
determining the cause
of the failure, retry the
command. If the cause
can not be determined,
please contact your local
service representative.

If ANR3504W was
received, than an error
occurred while logging
the volumes used to the
server volume history.
It is possible to issue
a DEFINE BACKUPSET
listing these volumes.
That would cause the
server to create the
necessary entries for this
backup set on this server.

ANR35 Backup set for
04W node name as
set name was
not able to log
the volumes
used for this
operation to the
server volume
history.

Explanation

The named object for
the specified node was
created. However, when
the process attempted to
add the volumes, used
for this operation to the
volume history for the
server, an error occurred
and this could not be
completed.

System action

Server operation
continues.

User response

Review other messages
issued to determine
which volumes were used

to generate this backup set. The volumes can be inserted into the server volume history for use by issuing a DEFINE BACKUPSET and listing these volumes. This will also allow this backup set to be queried from a client as well since there is not a server entry for this backup set. Only issue the DEFINE BACKUPSET if this generate backup set operation completed successfully.

ANR35 Backup set for 05I *node name as set name used volume volume name.*

Explanation

The named object for the specified node used the specified volume.

System action

Server operation continues.

User response

None.

ANR35 Cancel in 07I *progress*

Explanation

This message is displayed in response to a QUERY PROCESS command, and indicates that a generate backupset process has been canceled. The process will end shortly.

System action

The process terminates and server operation continues.

User response

None.

ANR35 Generation of 08W *backup set for node name as set name (data type data type) failed - no filespaces to process.*

Explanation

The named object for the specified node was not created. No filespaces were available to process.

System action

Server operation continues.

User response

Reissue the command against a node that has filespaces associated with it. If no filespaces exist for a given node, than there is no file data to write to the backupset.

ANR35 Command: Error 09E *encountered in accessing data storage - device class device class name is not defined.*

Explanation

During command *command* processing, an error occurred because the specified device class is not defined.

System action

The command *command* is ended and server operation continues.

User response

Make sure the specified device class is defined.

ANR35 Command: Error 10E *encountered in accessing data storage - disk volume specified.*

Explanation

During command *command* processing, an error occurred because a specified volume is a disk volume rather than a tape volume.

System action

The command *command* is ended and server operation continues.

User response

Make sure that all volumes specified for the command *command* are tape volumes.

ANR35 Command: Error 11E *encountered in accessing data storage - invalid volume name specified.*

Explanation

The server encounters an error in accessing data storage while processing command *command*. The error occurred because an attempt has been made to access a volume with an invalid name.

System action

The command *command* operation is ended and server operation continues.

User response

Issue the command with a valid volume name.

ANR35 Command: Error 12E *encountered in accessing data storage - insufficient number of mount points available for removable media.*

Explanation

During command *command* processing, the server cannot allocate sufficient mount points.

System action

The command *command* operation is ended and server operation continues.

User response

If necessary, make more mount points available.

ANR35 Command: 13E *Output error encountered in accessing data storage.*

Explanation

The command *command* operation ends because an error has been encountered by the server in writing to a device. Possible reasons include:

- I/O error writing to a device
- No storage space.

System action

The command *command* operation ends and

server operation continues.

User response

Query the activity log to find messages preceding this one to determine the cause of the error. After the problem is corrected, the command can be retried.

ANR35 Command: Data 14E transfer was interrupted in accessing data storage.

Explanation

The database transaction associated with command *command* operation failed because data transfer to or from data storage was interrupted by an external event.

System action

The command *command* operation is ended and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Reissue the command *command* after the problem is resolved.

ANR35 Command: Error 15E encountered in accessing data storage - volume already in use.

Explanation

During command *command* processing, a volume cannot be used

because it is already defined in a storage pool, or has been previously used by an export, database dump, or database backup operation (as recorded in the volume history) or is in use by another process.

System action

The command *command* operation is ended and server operation continues.

User response

Specify a volume that is not in use or defined in a storage pool, and that has not been previously used for an export, database dump, or database backup operation as recorded in the server volume history information. Use the QUERY VOLUME command to display the names of volumes that are defined to server storage pools. Use the QUERY VOLHISTORY command to display the names of volumes that have been used for export, database dump, or database backup operations.

ANR35 Command: Out 16E of space on sequential media, scratch media could not be mounted.

Explanation

During command *command* processing, the process encounters an out-of-space condition writing to the sequential media. Command

command ends when there is no more space on the sequential media for storing data and SCRATCH=NO has been specified on command *command*.

System action

Command *command* processing ends. Server processing continues.

User response

Reissue the command and specify SCRATCH=YES or specify additional volume names on the command.

ANR35 Command: Error 17E encountered in accessing data storage - required volume was not mounted.

Explanation

During command *command* processing, a required volume cannot be mounted. The mount request may have been canceled.

System action

The command *command* operation is ended and server operation continues.

User response

Issue the command again and make sure the necessary volumes are accessible.

ANR35 Command: 18I Processing canceled before completion.

Explanation

The background process to service the command *command* has been canceled with the CANCEL PROCESS command.

System action

Processing for the command *command* ends. Statistics on the number and type of objects moved, together with the total number of bytes copied, are displayed on the server console following this message.

User response

None.

ANR35 Command: 19E Insufficient memory available in accessing data storage.

Explanation

The server encounters a memory shortage in accessing data storage during command *command* operation.

System action

The command *command* operation ends and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR35 Command: 20E Internal error encountered in

accessing data storage.

Explanation

The server encounters an internal error in accessing data storage while processing command operation.

System action

The command *command* operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error to determine the cause of the data storage failure. If the failure can be found and resolved, reissue the command *command* operation. If the failure cannot be found, contact your service representative for assistance in resolving the problem.

ANR35 BackupSet 21W command: Data storage retrieve or restore failed - error detected.

Explanation

The server ends an backup set operation because an error has been encountered on the server. Some common reasons for the error are:

- The input volume is unavailable
- The storage pool is unavailable
- Data is corrupted on the input volume
- Hardware or media failure has occurred

- Database corruption

System action

The server ends the backup set operation and continues operation.

User response

Examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the problem and try the restore or retrieve again. If retry of the operation continues to fail contact your service representative.

ANR35 Backup set 23W command: Retrieve failed - error on input storage device.

Explanation

The server ends a backup set operation for the specified session because an I/O error has been encountered by the server in reading from a device. The object for which the I/O was issued is reported in a later message.

System action

Backup set processing skips this file, and continues operation.

User response

Query the activity log to find messages preceding this one that specify the device that is failing. Storage pool volumes can be varied offline (by using the VARY OFFLINE

command), or the server may need to be shut down with the HALT command to correct the hardware problem.

ANR35 Backup set 24W command: Transaction failed - data transfer interrupted.

Explanation

The database transaction associated with a backup set operation failed because data transfer to or from data storage was interrupted by an external event.

System action

The backup set operation is ended and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Attempt the backup set operation again after problem is resolved.

ANR35 Backup set 25W command: Transaction failed - storage media inaccessible.

Explanation

The server ends a transaction for an backup set operation because storage volumes are not available in the storage pools in which the client files are to be stored.

System action

The server ends the backup set operation and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available for file storage.

ANR35 Backup set 27E command operation terminated - it is acting on an empty volume or volume content is not as expected.

Explanation

The volume content this command is acting upon is not as expected, the volume is empty, or the volume cannot be found.

System action

The command operation is ended.

User response

Issue the command again and make sure the expected content is in the volumes or the volume is not empty and exists.

ANR35 Backup set 28E command: Media not accessible in

accessing data storage.

Explanation

The server ends a transaction for a backup set operation because storage volumes are not available in the storage pools in which the client files are to be stored.

System action

The server ends the backup set operation and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available for file storage.

ANR35 29W **Generate backupset skipping damaged file on volume** *volume name: Node node name, Type file type, File space filespace name, fsId filespace id, File name file name.*

Explanation

The backup set generation process encountered a file that was previously found to be damaged. The process encountered the

file during a sequential scan of all files on the storage pool volume; the indicated file may or may not have been a candidate for inclusion in the backup set.

If this file is part of an aggregate, it may have been previously marked as damaged because an integrity error was detected in some other file within the same aggregate. AUDIT VOLUME can determine if this is the case, and if so, will reset the damaged state for the file.

System action

The damaged file is not added to the backupset.

User response

Audit the indicated volume with FIX=NO to determine if the file is actually damaged. The audit will reset the file's damaged state if the file is not damaged.

(If the file is part of an aggregate, and none of the files within the aggregate are damaged, the audit will also reset the entire aggregate's damaged state.)

If the file remains in the damaged state after the audit completes, attempt to restore the damaged file by using the RESTORE STGPOOL command. Note, however, that this is only an option if the damaged file is in a primary storage pool that had been previously backed up to a copy storage pool.

If the audit resets the file's damaged

state, or the damaged file was successfully restored using RESTORE STGPOOL, and it is important for this file be included in the backup set, then rerun the GENERATE BACKUPSET command to generate a new backup set containing the file.

ANR35 30E **command name: Storage subrules of action type Replicate or NoReplicating require at least one node to be specified.**

Explanation

The UPDATE SUBRULE command would result in a storage subrule of action type Replicate or NoReplicating not having any nodes specified.

System action

The server does not process the command.

User response

Add another node to the storage subrule using UPDATE SUBRULE with the ADDNODE parameter, then reissue the previous command to remove the node.

ANR35 31E **command name: Storage subrules of action type Replicate or NoReplicating require at least one filespace to be specified.**

Explanation

The UPDATE SUBRULE command would result in a storage subrule of action type Replicate or NoReplicating not having any filespace specified.

System action

The server does not process the command.

User response

If the intention is to specify a different filespace, add the new filespace first using UPDATE SUBRULE with the ADDFILESPEC parameter, then reissue the previous command to remove the existing filespace.

If the intention is to include all filespace, you must first delete the subrule using the DELETE SUBRULE command and then redefine the subrule using the DEFINE SUBRULE command.

ANR35 32E **command name: Node node name is already defined in existing subrule subrule name.**

Explanation

The DEFINE SUBRULE command would result in the node being defined in two storage subrules of action type Replicate or NoReplicating.

System action

The server does not process the command.

User response

Reissue the command with a unique set of nodes, or remove the offending node from the existing subrule.

ANR35 40E Object set *set node:set name:data type* was not found for session *session number, node*.

Explanation

The indicated session id requested to restore the object set. The object set was not found on the server.

System action

The error is returned to the client.

User response

None.

ANR35 41E Error error code occurred opening object set *set node:set name:data type* for session *session number, node*.

Explanation

An error occurred while opening the indicated object set.

System action

An error is returned to the client.

User response

Correct the problem reported by previous messages, if possible.

ANR35 42E Error error code occurred reading object set *set node:set name:data type* for session *session number, node*.

Explanation

An error occurred while reading the indicated object set.

System action

An error is returned to the client.

User response

Correct the problem reported by previous messages, if possible.

ANR35 43E Error error code occurred while sending entries from object set *set node:set name:data type* for session *session number, node*.

Explanation

An error occurred while sending entries for the indicated object set.

System action

An error is returned to the client.

User response

Correct the problem reported by other prior or subsequent messages related to this session, and try the operation again.

ANR35 44E Generation of backup set for *node name* as

set name (data type *data type*) skipped shreddable data object in file space *filespace name* (fsId *filespace id*), file name *file name*, type *file type*.

Explanation

The named data object for the specified node was skipped while generating a backupset.

The data object resides in a shreddable storage pool and will not be included in the backupset because the ALLOWSHREDDABLE=YES parameter was not specified.

System action

Backupset generation continues.

User response

Check with your Storage Administrator to ensure data residing in a shreddable storage pool is allowed to be stored on a backupset. Data stored on backupsets cannot be shredded. Only data that resides in a shreddable storage pool can be shredded. If your Storage Administrator allows shreddable data to be stored on backupsets, then restart the operation and specify the ALLOWSHREDDABLE=YES parameter.

ANR35 47I Backup set *set name* used volume *volume name*.

Explanation

The named object used the specified volume.

System action

Server operation continues.

User response

None.

ANR35 48E Command: Retrieve or restore failed - file was moved or deleted from data storage during retrieval.

Explanation

The server ends a file retrieval operation for the specified command because the file has been moved or deleted from data storage by another process before retrieval is complete.

System action

The server ends the command.

User response

Contact your administrator to find out if space reclamation, migration, DELETE FILESPACE, DELETE VOLUME, MOVE DATA, or inventory expiration processes are running; these processes can move or delete data storage files during retrieval. Reissue the command after these processes have been completed or canceled.

ANR35 49W Reorganization was canceled because of a

conflicting lock on table *table name*.

Explanation

The server online reorganization for the referenced table could not be completed because of a lock conflict. The reorganization was canceled.

System action

The server will continue to operate.

User response

None.

ANR35 50E **Definition of backup set *set name* for node *name* failed because it has an unknown format.**

Explanation

The named object for the specified node was not defined. It was generated on a server that is at a higher level than this server and contains data that cannot be properly interpreted by this server.

System action

Server operation continues.

User response

Define the object on a server that is compatible with the server that generated the object, or upgrade this server to be compatible with the server that generated the object.

ANR35 51I **The server delete batch size has been set to new batch size. Deletion operations that start after this point will use the new value.**

Explanation

A SETOPT command was used to set the value for the delete batch size value. This setting determines the maximum number of files that are deleted from the server in one database transaction. The setting influences inventory expiration operations.

System action

The server uses this new setting for deletion operations that are started after this message is issued.

User response

None.

ANR35 52E **Command: Node *node name* is a node name not supported on the target server and is skipped.**

Explanation

The node name has one or more characters that is not supported on server versions earlier than 7.1.1. The character is the '@' sign.

System action

The server skips the node name and operation continues.

User response

Check if the node name has the '@' (at sign) character. Node names with the '@' character are supported on server versions 7.1.1 and newer. Reissue the command specifying a different node name, or, rename the node name and reissue the command.

ANR35 53E **The server cannot connect to the cloud service provider with the credentials that are stored in the storage pool or connection.**

Explanation

The connection to the cloud service provider failed because the credentials of the storage pool or connection did not resolve. These credentials were obtained from a key file in a location that was specified at the time the storage pool or connection was either defined or updated.

System action

The command fails.

User response

Verify that the key file is correct and that the cloud provider is active. To reload the credentials from the key file, issue an UPDATE STGPOOL or UPDATE CONNECTION command and specify the KEYLOCATION parameter.

ANR35 54E **The server cannot connect to the cloud**

service provider when using the credentials from the key file at *key_location*.

Explanation

The connection to the cloud service provider failed because the credentials of the key file at the specified key location could not be resolved.

System action

The command fails.

User response

Verify that the key file is correct and that the key location was correctly entered. Also, verify that the cloud provider is active.

ANR35 55E **The server cannot connect to the cloud service provider with the specified cloud URL of *url* when using the given password as a Shared Access Signature token.**

Explanation

The connection to the cloud service provider failed because the cloud URL, and cloud password specified in the command could not be resolved.

System action

The command fails.

User response

Verify that the cloud URL, password, and cloud type

for the cloud storage pool are correct and have been entered correctly. Also, verify that the cloud provider is active.

ANR35 56E The server cannot connect to the cloud service provider with the specified cloud URL of *url* when using the cloud ID of *id* and its password.

Explanation

The connection to the cloud service provider failed because the cloud URL, cloud ID, and cloud password specified in the command could not be resolved.

System action

The command fails.

User response

Verify that the cloud URL, user ID, password, and cloud type for the cloud storage pool are correct and have been entered correctly. Also, verify that the cloud provider is active.

ANR35 57I The credentials for the cloud service provider were verified.

Explanation

The verification of the credentials for the cloud service provider succeeded.

System action

Server operation continues.

User response

None.

ANR35 58E command: The command was not processed because it contains an invalid parameter: *parameter*.

Explanation

The specified parameter is invalid in this context. The parameter might be invalid because it applies only to certain types of data. Or the specified parameter might be incompatible with another parameter that was issued for this command.

System action

Server operation continues, but the command is not processed.

User response

Omit or modify the affected parameters and reissue the command. For information about valid command parameters, go to IBM Knowledge Center and search for the command name.

ANR35 59E command: The *parameter* parameter value is not numeric.

Explanation

The command cannot be processed because the specified parameter requires a numeric value.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 60E command: One or more of the following parameters are missing: *parameters*.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 61E command: Keyword *parameter* parameter is not recognized. The following keyword parameters are valid: *validlist*.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 62E command: The *parameter* parameter value is not numeric. The minimum value is *min value* and the maximum value is *max value*.

Explanation

The command cannot be processed because the specified parameter requires a numeric value.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 63E command: The *parameter* parameter value is out of range. The minimum value is *min value* and the maximum value is *max value*.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 64E command: The *parameter* parameter value

value is not recognized. The following parameter values are valid: validlist.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 65E *command: The parameter parameter value value is out of range. The minimum value is min value and the maximum value is max value. The following parameter values are also valid: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 66E *command: The parameter parameter value value is not recognized. The*

minimum value is min value and the maximum value is max value. The following parameter values are also valid: validlist.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 67E *command: The scale scale for the parameter parameter is not recognized. The following scales are valid: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 68E *command: The parameter parameter value value is out of range. The minimum value is min value and the maximum*

value is max value.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 69E *command: The parameter parameter value value is too long. The maximum length is max length characters.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 70E *command: The parameter parameter value is too short. The minimum length is min length characters.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 71E *command: The parameter parameter value value contains an invalid character "character". The following characters are valid: "validlist" (excluding the quotation marks).*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 72E *command: The parameter parameter value value is a reserved value and cannot be specified.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 73E *command: The parameter parameter value value is not a valid date.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 74E *command: The parameter parameter value value month month is out of range. The minimum value is minimum and the maximum value is maximum.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 75E *command: The parameter parameter value*

value day day is out of range. The minimum value is minimum and the maximum value is maximum.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 76E *command: The parameter parameter value value year year is out of range. The minimum value is minimum and the maximum value is maximum.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 77E *command: The parameter parameter relative days value value is not numeric.*

Explanation

The command cannot be processed because the specified parameter requires a numeric value.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 78E *command: The parameter parameter relative days value value is out of range. The minimum value is 0 and the maximum value is max value.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 79E *command: The parameter parameter value value is not a valid time.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 80E *command: The parameter parameter value value hours hours is out of range. The minimum value is minimum and the maximum value is maximum.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 81E *command: The parameter parameter value value minutes minutes is out of range. The minimum value is minimum and the maximum value is maximum.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 82E *command: The parameter parameter value value seconds seconds is out of range. The minimum value is minimum and the maximum value is maximum.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 83E *command: The parameter parameter relative hours value value is not numeric.*

Explanation

The command cannot be processed because the specified parameter requires a numeric value.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 84E *command: The parameter parameter relative minutes value value is not numeric.*

Explanation

The command cannot be processed because the specified parameter requires a numeric value.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 85E *command: The parameter parameter relative hours value value is out of range. The minimum value is 0 and the maximum value is max value.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 86E *command: The parameter parameter relative minutes value value is out of range. The minimum value is 0 and the maximum value is max value.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 87E *command: The parameter parameter is specified more than once.*

Explanation

The command cannot be processed because the specified parameter can only be entered once.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 88E *command: The parameter parameter requires the prerequisite parameter parameter.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 89I *command: For more information, issue the HELP command command.*

Explanation

One or more syntax errors were found in the specified server command (see the previous messages). The command cannot be processed as specified.

System action

None.

User response

Verify the command syntax and reissue the command.

ANR35 90E *command: Command is above the requested skill level.*

Explanation

The specified server command has a skill level above what was requested.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax.

ANR35 91E *command: The parameter parameter value value is out of range. The minimum value is min value and the maximum value is max value. The following parameter values are also valid: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 92E *command: The parameter parameter value value is not recognized. The minimum value is min value and the maximum value is max value. The following parameter values are also valid: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 93E *command: The parameter parameter value value is not valid. One of the following scales is required: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 94E *command: The integer portion of the parameter parameter value value is out of range. The minimum integer value is min value and the maximum integer value is max value.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 95E *command: The integer portion of the parameter parameter value value is out of range. The minimum integer value is min value and the maximum integer value is max value. The following parameter values are also valid: validlist.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 96E *command: The parameter parameter conflicts with the conflicting parameter parameter.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 97E *command: The parameter parameter value value is specified more than once.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 98E *command: At least one of the following parameters is required: parameters.*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR35 99E *command: One and only one of*

the following parameters is required: *parameters*.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR36 00E *command: The parameter value contains an invalid character "character". The following characters are valid: "validlist" (excluding the quotation marks).*

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR36 01W *Policy Domain release failed for domain domain id due to communications failure.*

Explanation

The storage agent was attempting to inform the database server that it was finished with the domain indicated by the *domain id*, but was unable to communicate with the database server. The cached policy information will be cleaned up when the storage server terminates or re-starts or when the database server re-starts.

System action

The storage agent continues operation. The policy information is deleted from the storage agent policy cache.

User response

Policy caches are cleaned up on the storage agent or server re-start. Network communication between the storage agent and database server should be checked.

ANR36 02E *Unable to communicate with database server.*

Explanation

The storage agent was attempting to communicate with the database server but was unable to do so.

System action

The storage agent operation fails.

User response

Check the configuration of the storage agent and server to ensure that communication parameters are correct. Ensure that the database server is running and is accepting messages.

ANR36 03E *Storage AgentStorage Agent name was unable to load policy information due to a protocol error.*

Explanation

While receiving policy information from a database server, processing ended prematurely because of a protocol error.

System action

Server operation continues. Policy is loaded from the database server database.

User response

If this problem persists, contact your service representative.

ANR36 04E *This command is not supported in the current operating environment.*

Explanation

A command was issued that is valid under most circumstances, but not in the current server environment.

System action

Server operation continues.

User response

Issue commands which are allowed in the current environment.

ANR36 05E *Unable to communicate with storage agent.*

Explanation

The database server was attempting to communicate with the storage agent but was unable to do so.

System action

The database server operation fails.

User response

Check the configuration of the storage agent and server to ensure that communication parameters are correct.

ANR36 06E *The storage agent was communicating with the database server on a restore request with verb verb name and received return code return code.*

Explanation

The storage agent and database server were coordinating a restore request. While communicating using the indicated verb (an internal request mechanism between

the storage agent and database server), an unexpected return code was received. The verb name and return code are provided for IBM Software Support.

System action

Database server and storage agent continue. The restore request fails, but may be retried by the client.

User response

Check the configuration of the storage agent and server to ensure that communication parameters are correct. If this problem persists, contact your service representative.

ANR36 07E The storage agent was communicating with the client on a restore request with verb *verb name* and received return code *return code*.

Explanation

The storage agent was communicating with a client for a restore request. While communicating using the indicated verb (an internal request mechanism between the storage agent and client), an unexpected return code was received. The verb name and return code are provided for IBM Software Support.

System action

Database server and storage agent continue. The restore request fails, but may be retried by the client.

User response

Check the configuration of the storage agent and client to ensure that communication parameters are correct. If this problem persists, contact your service representative.

ANR36 08E The storage agent was communicating with the database server on a restore request. An unexpected request (id *verb*) was received from the database server.

Explanation

The storage agent and database server were coordinating a restore request. While communicating, the indicated verb (an internal request mechanism between the storage agent and database server), was unexpected. The verb number is provided for IBM Software Support.

System action

Database server and storage agent continue. The restore request may fail, but may be retried by the client.

User response

If this problem persists, contact your service representative.

ANR36 09E The storage agent was handling a restore request. A failure occurred in starting a new thread. The return code *return code* from the failing routine may be useful to IBM Software Support.

Explanation

The storage agent was handling a restore request. A new thread could not be started. Without the new thread the request could not be handled.

System action

Database server and storage agent continue. The restore request has failed.

User response

Ensure that there is sufficient system memory for the storage agent to operate properly. Insufficient memory or paging/swap space can cause problems in starting threads. If this problem persists, contact your service representative.

ANR36 10I Domain Identifier *domain identifier* was not found.

Explanation

The server was cleaning up cached policy information after a restore request. A domain with the indicated identifier was not found in an internal list.

System action

Database server and storage agent continue.

User response

No response is required if the message is the result of starting a storage agent. The storage agent requests that the server purge cached information that it was using previously. It is possible that information tracking policy caching has become stale. In this case, no response is required. If the message occurs without a storage agent connecting to the server, contact your service representative.

ANR36 11E Storage Agent unable to contact server.

Explanation

The storage agent was attempting to contact the server to start a session or run a command. The storage agent was unable to contact the server to start a transaction.

System action

The storage agent continues processing. The server may be down or there may be a communications problem.

User response

No response is required if the message is the result of stopping a server. Ensure that the server with which the storage agent communicates is running and that there is connectivity between the systems. The server must be restarted before you can start a new administrator session with the storage agent.

ANR36 Process process 13W ID skipped Num Files files on volume Volume name because of a lock conflict with another process.

Explanation

A lock conflict was encountered while moving files and the retries were exceeded.

System action

The operation skips the files without making copies and continues.

User response

Retry the operation.

ANR36 The server 14E failed to connect to the database.

Explanation

The server was unable to establish or validate a connection to the database.

System action

The server will shutdown.

User response

Examine the messages that were issued before this message to determine the cause of the failure. Start the server after the issue has been resolved.

ANR36 The value of the 15E DATAFORMAT parameter for the datamover is not compatible with the NAS file server.

Explanation

The datamover was defined with the NDMPDump DATAFORMAT. This data format is not compatible with an EMC NAS file server.

System action

The NDMP operation fails.

User response

Update the datamover to use the CELERRADump dataformat.

ANR36 An error 16E occurred. More information might be available in the dsmserv.err and dsdffdc.log files.

Explanation

None.

System action

Server operation continues.

User response

Review the dsmserv.err and dsdffdc.log files for messages that occurred at the same time as the error. The dsmserv.err and dsdffdc.log files is located in the server working directory. Correct any problems that are identified.

ANR36 The server 17E failed to start with return code rc because of an issue with the database environment handle.

Explanation

The server was unable to allocate a handle to the database environment.

System action

The server stops.

User response

The following are possible causes and solutions:

- The most common cause is that the DSMSEV utility is not being run as the instance owner, or the user profile (db2profile) has not been sourced for the current login shell. To resolve the issue, log in as the instance user and source the Db2 profile, db2profile: . / home/tsminst1/sqllib/db2profile Note: Ensure that you insert a space after the initial dot.
- A mismatch between the /etc/hosts file and the ~/sqllib/db2nodes.cfg file. If the host name was recently

updated, ensure that the systems host name in the /etc/hosts file matches the host name in the ~/sqllib/db2nodes.cfg file. If the files contain the same host name, see the db2diag.log files for more information. For information about the DB2nodes.cfg file, see the Db2 documentation.

- The database manager cannot be started due to insufficient system resources. Review the current operating system kernel settings and ulimit settings for parameters like nfiles for the user who is starting the DSMSEV program. Increase the values if needed. For information about changing kernel and ulimit values, see the documentation for your operating system. For guidelines concerning ulimit settings on IBM Storage Protect servers search for "user limits" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEVQ/>). For guidelines concerning operating system kernel parameters, search for "tuning kernel parameter" in the product information.
- Instance entries are missing from the /etc/services file. If the entries do not exist in the /etc/services file, re-create the entries as in this example: DB2_tsminst1 60000/tcp DB2_tsminst1_1 60001/tcp

DB2_tsminst1_2
60002/tcp
DB2_tsminst1_END
60003/tcp As a general rule, these entries are placed near the end of the /etc/services file. Replace tsminst1 with the name of the IBM Storage Protect instance that is being used on the server.

- A copy of the DB2APP64.dll file is in the server instance directory. In some cases, users mistakenly copy the DB2APP64.dll file to the server instance directory from the installation directory. By default, the installation directory is C:\Program Files\Tivoli\TSM\db2\BIN. The DB2APP64.dll file should be in this directory only. Any additional copies of this DLL file should be removed.

ANR36 18W *bad adapter number of total adapter number host bus adapters cannot be opened.*

Explanation

The SAN discovery function is not able to open all of the host bus adapters (HBAs) on the system.

System action

None.

User response

IBM Storage Protect SAN discovery may only be getting partial device information from the SAN. Verify that all HBAs are

configured and working properly.

ANR36 19W *The user limit for limit is below the recommended minimum value of value.*

Explanation

A user limit that is below the recommended minimum value might cause unexpected behavior.

System action

None.

User response

Set the user limit so that it is equal to or greater than the recommended minimum value.

ANR36 20I *Status threshold status threshold updated.*

Explanation

An UPDATE STATUSTHRESHOLD command has updated the status threshold indicated.

System action

None.

User response

None.

ANR36 21I *Status threshold status threshold deleted.*

Explanation

A DELETE STATUSTHRESHOLD

command has deleted the status threshold indicated.

System action

None.

User response

None.

ANR36 22I *Status threshold status threshold defined.*

Explanation

A DEFINE STATUSTHRESHOLD command has created the status threshold indicated.

System action

None.

User response

None.

ANR36 23E *Command: Status threshold status threshold is already defined.*

Explanation

The command indicated has attempted to define a status threshold that already exists.

System action

None.

User response

None.

ANR36 24E *Command: Status threshold threshold name is not defined.*

Explanation

The command shown specifies a status threshold that is not defined with the server.

System action

None.

User response

None.

ANR36 25I *Host bus adapter (HBA) API functions are not supported by adapter adapter name.*

Explanation

The HBA API function failed to retrieve the attributes of the adapter. The reason is that this adapter is not a Fibre Channel SCSI adapter. This adapter might be a Serial Attached SCSI adapter. Therefore, SAN discovery does not work.

System action

The system is unable to retrieve the attributes of the adapter.

User response

Validate whether this adapter is a Fibre Channel SCSI adapter or not, and if it is, contact hardware support for the adapter.

ANR36 26W *A check condition occurred during a small computer system interface (SCSI) inquiry at Fibre Channel port*

**WWN=fc port
wwn,
KEY=sense key,
ASC=asc,
ASCQ=ascq.**

Explanation

The host bus adapter (HBA) API function failed to query the SCSI information of a device located at this port. A hardware error or SCSI bus reset might have occurred during the operation.

System action

The HBAAPI inquiry function was unable to retrieve the SCSI device information from this port.

User response

Verify that the adapter, device, and Fibre Channel are connected. For more information about the values of the KEY, ASC, and ASCQ fields, see the SCSI specification.

**ANR36 Alerts cannot be
27I sent by email.**

Explanation

You must enable the alert monitor and email option to receive alerts by email.

System action

Server processing continues.

User response

Configure the server alert settings with the following commands:
SET ALERTMONITOR ON
SET ALERTEMAIL ON

**ANR36 The monitor
28E status process
has
encountered an
unexpected
error setting the
status of
element
element. The
process
returned error
code rc.**

Explanation

The process that monitors server activity has detected an error setting the element status.

System action

None.

User response

None.

**ANR36 All
29W administrators
with system
level authority
use LDAP
authentication.
Administrator
admin was the
most recent
administrator
with system
level authority
that used LOCAL
authentication.**

Explanation

All administrator with system level authority use LDAP authentication. This situation has risks, based on the availability of the LDAP server. If required, make sure that the LDAP server has high availability configurations implemented. For example: clustering, mirroring, or replication.

Having one system-level administrator with LOCAL authentication gives that administrator the ability to update other administrators and nodes to LOCAL authentication if the LDAP server is down unusable for an extended period of time.

System action

The only administrator with system level authority uses LDAP authentication.

User response

Consider having one administrator with system authority and LOCAL authentication. If this is not possible, validate that the high availability configurations for the LDAP server are sufficient.

**ANR36 Command: The
30E condition
condition will
conflict with
existing status
threshold
threshold with
condition
condition.**

Explanation

The command indicated has attempted to define or update a status threshold that will conflict with an existing threshold.

System action

The status threshold is not defined or updated.

User response

Either delete the existing threshold or use a different condition.

**ANR36 The database is
31E not intact.**

Explanation

The server failed to start because the database was not intact.

System action

Server initialization fails.

User response

If this is a new installation or configuration, confirm that the DSMSEV FORMAT step was completed successfully. If this is an existing configuration that was previously working, a database restore might be required.

**ANR36 command: The
32E administrator
administrator ID
is locked.**

Explanation

The administrator ID is locked and cannot be used in this command.

System action

The command fails.

User response

Unlock the administrator ID and reissue the command.

**ANR36 Process process
33I ID skipped
volume Volume
Name because
the volume
contains files**

that have not been backed up.

Explanation

The DEDUPREQUIRESBACKUP server option is set to the default value of YES. If the value of this option is YES, files within a deduplicated storage pool must be backed up to a non-deduplicated copy storage pool before the files can be reclaimed.

System action

The operation skips the volume and continues.

User response

Ensure that all files on the volume are backed up to a non-deduplicated copy storage pool. You can change the value of the DEDUPREQUIRESBACKUP server option to NO. However, changing the option value to NO can result in unrecoverable data loss if a data-integrity error occurs.

ANR36 34W The HBA API cannot provide tape device information from the SAN.

System action

No action is required.

User response

Check the connections between the Fibre Channel cables and the tape device settings to ensure that the tape devices can be presented to the system first. Contact the HBA vendor to report problems

if the QUERY SAN command cannot retrieve tape device information when tape devices are presented to the system.

ANR36 35I The status monitor has updated the event record retention period to 14 days.

Explanation

To provide full functionality for the Operations Center, the server must retain event records for a minimum of 14 days.

System action

Event records will be retained for 14 days.

User response

Use the SET EVENTRETENTION command if a different value is desired.

ANR36 36W Transaction failed for session *session number* for node *node name* (*client platform*) - the key is already defined.

Explanation

The server ends the transaction because the key is already defined in the database.

System action

Server operation continues.

User response

Make sure the key is unique.

ANR36 37W Transaction failed for session *session number* for node *node name* (*client platform*) - the key is not defined.

Explanation

The server ends the transaction because the key is already defined in the database.

System action

Server operation continues.

User response

Make sure the key is defined.

ANR36 38W Space reclamation skipped volume *volume name* because the spanned volume *volume name* in storage pool *storage pool name* is inaccessible.

Explanation

The specified volume is eligible for space reclamation, but the spanned volume is either unavailable or destroyed. The specified volume is skipped. Space reclamation continues for other volumes.

System action

The space reclamation process continues.

User response

No action is required.

ANR36 39I command: A deduplicated NAS backup image for node *node name*, file space *filepath* name was skipped.

Explanation

The server command has determined that a NAS backup image is not eligible for processing because the image or one of its dependent files is stored or had been stored in a deduplicated storage pool.

System action

The processing continues.

User response

No action is required.

ANR36 40E command failed because the target replication server *target_server_name* is invalid.

Explanation

The specified target replication server is not a target replication server.

System action

The command fails.

User response

To set the name of a target replication server and to run the replication validation process for that target replication server, complete the following steps:

1. Obtain a list of possible target replication servers by issuing the QUERY SERVER command.

2. Verify the policies by issuing the VALIDATE REPLPOLICY command.

**ANR36 SET
41E DISSIMILARPOLICIES
command failed because the policies on the target replication server were not verified.**

Explanation

The policies on the target replication server were not verified before issuing the SET DISSIMILARPOLICIES command.

System action

The command fails.

User response

Verify the policies by issuing the VALIDATE REPLPOLICY command.

**ANR36 Damaged files
42E are not recovered because the system-wide REPRECOVERDAMAGED setting is turned off.**

Explanation

To recover damaged files by using the REPLICATE NODE command, the REPRECOVERDAMAGED setting must be turned on.

System action

The REPLICATE NODE command fails.

User response

To resolve the issue, complete the following steps: 1. Use the SET REPRECOVERDAMAGED command to turn the setting for file recovery on. Issue the following command: set replrecoverdamaged on 2. Run the REPLICATE NODE command again. Ensure that the RECOVERDAMAGED parameter is set to YES or ONLY.

**ANR36 Process number
43W for description exceeded the maximum allowed running time.**

Explanation

The process was started by a administrative schedule and is running longer than the maximum allowed time defined in the schedule.

System action

The process is cancelled and server operation continues.

User response

None.

**ANR36 The target
44E replication server name does not support dissimilar policies.**

Explanation

Dissimilar policies are supported only on IBM Storage Protect Version 7.1.1 or later.

System action

Policy validation is skipped for the specified server.

User response

To resolve this issue, complete the following steps: 1. Upgrade the target server to IBM Storage Protect V7.1.1 or later. 2. Run the VALIDATE REPLPOLICY command again.

**ANR36 Command:
45E Storage pool storage pool name still contains at least one directory.**

Explanation

A DELETE STGPOOL command specifies a storage pool that has directories assigned to it.

System action

The server does not process the command.

User response

Delete the directory belonging to the storage pool and reissue the command.

**ANR36 Command:
46E Storage pool directory storage pool directory name has an access mode of access mode and has active data.**

Explanation

A DELETE STGPOOLDIR command specifies a storage pool directory that has in use directories assigned to it.

System action

The server does not process the command.

User response

Ensure that there are no containers in the directory before you delete it. Issue the UPDATE STGPOOL command and set the REUSEDELAY parameter to specify the number of days that must elapse after all deduplicated extents are removed from a container storage pool. To force removal of the directory, issue the UPDATE STGPOOLDIRECTORY command and set the access mode to DESTROYED. Issue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAGED parameter to delete the container.

**ANR36 The command
47E name command was not processed because a target replication server was not specified.**

Explanation

Ensure that either a target replication server is specified in the command or a default target replication server is configured to the source replication server.

System action

System operation continues, but the server does not process the command.

User response

To use replication storage rules, you must specify the target replication server in the command. For example, to validate a replication policy for a target replication server that is named PAYROLL, you would issue the following command:

validate replpolicy
payroll

However, to use the **REPLICATE NODE** command for replication, you have the following options:

- You can issue the command without specifying a target replication server if a default target replication server is already set. You can issue the **SET REPLSERVER** command to set the default target replication server. For example, to specify a server that is named PAYROLL4, you would issue the following command:

set replserver
payroll4

- You can issue the command with the name of the target server.

ANR36 48E Command:
Storage pool
NEXTSTGPOOL:
storage pool
name is a
directory-

container
storage pool.

Explanation

The command indicated specifies the name of a storage pool which is a directory-container storage pool. The command syntax requires that a directory-container storage pool name not be specified.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool name.

ANR36 49I A scan to
identify
damaged files
was initiated at
time.

Explanation

If the REPLRECOVERDAMAGED system parameter is set to ON, the system conducts a brief check of server database tables every 30 minutes to determine whether the number of damaged bitfiles has changed. If the number has changed, the system initiates a scan of server database tables to identify the damaged files for recovery purposes.

System action

A scan was started to collect information about damaged files.

User response

No action is required.

ANR36 50I A scan to
identify
damaged files
was completed
at time.

Explanation

If the REPLRECOVERDAMAGED system parameter is set to ON, the system conducts a brief check of server database tables every 30 minutes to determine whether the number of damaged bitfiles has changed. If the number has changed, the system initiates a scan of server database tables to identify the damaged files for recovery purposes.

System action

A scan that collected information about damaged files is completed. If the recovery of damaged files is enabled for a node, the next replication process will replace the damaged files on that node with undamaged files from the target replication server. Recovery of damaged files can take place only if the files were replicated before the damage occurred.

User response

No action is required.

ANR36 51W The process is
skipping a
damaged file on
volume volume
name: Node
node name,
Type file type,

File space
filesystem name,
File name *file*
name.

Explanation

A file is encountered that was previously found to be damaged. If this file is part of an aggregate, the entire aggregate was previously marked damaged, possibly because an integrity error was detected for some other file within the aggregate.

System action

The damaged file is not replicated.

User response

Perform the following actions:

- Audit the volume with FIX=NO to verify that the file is damaged. If the file is undamaged, the audit process resets the file status. If the file is part of an aggregate and the entire aggregate is found to be undamaged, the audit process resets the aggregate status.
- If the volume is in a primary storage pool and has a copy in the copy storage pool, attempt to restore the damaged file by issuing the RESTORE STGPOOL command.

ANR36 52I The VALIDATE
REPLPOLICY
command did
not find any
nodes to
validate on the
target

**replication
server *target*
server *name*.**

**previous 24
hours.**

Explanation

The nodes on the target replication server are not the same as the nodes on the source replication server. When you issue this command, it does not find any nodes that are common to both replication servers to compare.

System action

Server operation continues.

User response

No action is required.

**ANR36 A scan to
53I identify
damaged files
was stopped at
time.**

Explanation

The scan was stopped because the REPLRECOVERDAMAGED system parameter was set to OFF.

System action

Information that was collected during the scan was saved.

User response

No action is required. However, if you want to restart the scan, issue the following command: SET REPLRECOVERDAMAGED ON

**ANR36 Inventory file
54W expiration
processing did
not run in the**

Explanation

When you are using the policies on the target replication server to manage replicated client-node data, you must run expiration processing every 24 hours to allow the target replication server reuse storage pool space that is occupied by expired replicated data.

System action

Server operation continues.

User response

Run expiration processing at least once in a 24 hour period.

**ANR36 Replication
55I ended for
process *node
name*, but the
deduplication
catalog is being
updated for the
following
storage pools:
pool list.**

Explanation

As files were being recovered from the target replication server, a separate thread was started to update the entries for the affected files in the deduplication catalog. The thread was still in the process of updating the entries when the replication recovery process ended.

System action

The thread continues to update the attributes of

the recovered files in the deduplication catalog. When the updates are complete, all affected files will be accessible to client sessions and server processes.

User response

No action is required.

**ANR36 Replication
56I recovery of
damaged files is
disabled.**

Explanation

During a database upgrade, damaged files were detected. The REPLRECOVERDAMAGED system parameter, which is used to enable the recovery of damaged files, was automatically set to OFF. The OFF setting prevents the server from scanning database tables for damaged objects that can be recovered. Prevention of the scan is necessary in case many damaged files are detected. In that case, the scan might require considerable time and a large amount of server resources.

System action

The server upgrade continues, and the REPLRECOVERDAMAGED system parameter remains set to OFF.

User response

The process for scanning database tables should be scheduled when the use of server resources is at a minimum. To start the scan, issue the following command: set

replrecoverdamaged on. For detailed instructions, see the documentation for the SET REPLRECOVERDAMAGED command.

**ANR36 REPAIR
57E STGPOOL: One
or more
required stgpool
directories is
currently
unavailable on
the target
server.**

Explanation

The REPAIR STGPOOL process is unable to repair one or more files because the replicated data is located in a stgpool directory that is currently unavailable on the target server.

System action

The REPAIR STGPOOL process fails.

User response

If the stgpool directory has been marked unavailable on the target server, it can be updated using the UPDATE STGPOOLDIR command.

**ANR36 Command:
58E Storage pool
storage pool
name is
currently in use
by replication,
repair, protect,
encrypt, audit
container, move
operations or
remove
stgprotection.**

Explanation

The command indicated references a storage pool that is in use.

System action

The server does not process the command.

User response

Reissue the command at a later time.

ANR36 Command:
59E Storage pool storage pool name does not have a protection stgpool defined.

Explanation

The stgpool must have a protection stgpool defined.

System action

The server does not process the command.

User response

Update the PROTECT STGpool parameter for the pool you are trying to protect.

ANR36 Command:
60E An unexpected error occurred while opening or writing to the container. Container container name in stgpool storage pool name has been marked as container state and should be audited to validate accessibility and content.

Explanation

An I/O error occurred on the container and it cannot be used.

System action

The server does not use the container.

User response

Run an AUDIT CONTAINER command on the container.

ANR36 Marked
61I container container name and the # of data extents data extents that it contains as damaged.

Explanation

Displays results of data extents marked damaged due to an AUDIT CONTAINER command.

System action

None.

User response

None.

ANR36 Command:
62E Storage pool storage pool name still contains data.

Explanation

A DELETE STGPOOL command encountered a storage pool that still contains data.

System action

The server does not process the command.

User response

Delete the data that belongs to the storage pool and reissue the command.

ANR36 Source file(line
63W number):
Storage pool storage pool name failed to delete the cloud container.

Explanation

A DELETE STGPOOL command could not delete the cloud container.

System action

The server does not process the command.

User response

Ensure the connection to the cloud server has valid credentials and can communicate properly.

ANR36 Command: A
64W network-attached storage (NAS) table of contents (TOC) for node node name, file space filespace name was skipped.

Explanation

The TOC was skipped because a table of contents storage pool is not defined on the target replication server.

System action

Node replication processing continues, but the TOC is not replicated.

User response

No action is required. However, to ensure that the backup image is replicated, you can use the **UPDATE COPYGROUP** command to specify a table of contents destination, and then activate the updated policy set by issuing the **ACTIVATE POLICYSET** command. These two commands must be issued on the target replication server. Then, initiate node replication on the source replication server. For example, to change the STANDARD copy group to store table of contents data in the TOCPPOOL storage pool where the domain name is STANDARD and the policy name is STANDARD, complete the following steps:

1. Issue the following command:

update copygroup standard standard standard tocdestination=to cpool
2. Issue the following command:

activate policyset standard standard
3. Start the node replication process. For example, if the node is named NODE1, issue the following command on the source replication server:

replicate node node1

ANR36 Command:
65E Source storage pool storage

pool is not eligible to be converted.

Explanation

Only primary sequential-access storage pools that are enabled for data deduplication, and are not in use as tiering target pools, are eligible for conversion to a directory-container storage pool.

System action

The server does not process the command.

User response

Issue the command again and specify a primary sequential-access storage pool that is enabled for data deduplication, but is not a tiering target pool, as the source storage pool.

ANR36 Command: 66E Destination storage pool storage pool is not eligible for the conversion.

Explanation

The command specifies a target storage pool that is not valid for conversion. You must specify a directory-container storage pool as the target storage pool for a conversion process. When restarting a stopped conversion process, you must specify the target storage pool which was originally used for the conversion process.

System action

The server does not process the command.

User response

Issue the command again and specify a directory-container storage pool as the target storage pool. If restarting, specify the same target storage pool which was originally used for the conversion process, or issue the command without the target storage pool parameter.

ANR36 Unable to 67W connect by FASP with server server name on port port name.

Explanation

An attempt to establish connectivity with a target server using specified port failed. The operation will use the existing TCP/IP session to communicate with the target server.

System action

The server operation continues.

User response

Examine the source and target server activity logs for information related to FASP Byte-Stream activity.

ANR36 Command: 68E Invalid attempt to change the access state for storage pool storage pool.

Explanation

The access state for a storage pool cannot be changed once it has been converted. In addition, a storage pool cannot be manually changed to a conversion state.

System action

The server does not process the command.

User response

No action is required.

ANR36 There is at least 69W one reference to storage pool storage pool as a policy or nextpool destination. When the storage pool conversion starts the storage pool can no longer ingest or store new data.

Explanation

There is limited write access to the storage pool during conversion. The storage pool cannot store new files from either client sessions or server processes. Server operations for the converted storage pool might be limited or unavailable. Storage pool conversion cannot be reversed after it is started.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to convert the storage pool or 'N' to stop the process.

ANR36 Storage pool 70W storage pool is either converted or is being converted and cannot accept any new data.

Explanation

Conversion is in progress for the storage pool.

System action

The storage pool cannot store new files from either client sessions or server processes.

User response

Update all policies to ensure that the destination specifies a storage pool that does not have a converting state. Ensure that a storage pool that does not have a converting state is named as the next storage pool by issuing the UPDATE STGPOOL command and specifying the NEXTstgpool parameter.

ANR36 Storage pool 71E storage pool is either converted or is being converted and cannot perform migration or reclamation between storage pools.

Explanation

The storage pool is in a conversion state and cannot migrate or reclaim

data to another storage pool.

System action

The request will be denied for the storage pool in conversion state.

User response

Use the MOVE DATA, or MOVE NODEDATA, commands to move specific groups of data out of the storage pool. Data can only be moved if there are no conversion processes active for the storage pool.

ANR36 72E The license file that is required to enable Aspera Fast Adaptive Secure Protocol (FASP) technology was not found on the *server_loc* server.

Explanation

An attempt to use the IBM Aspera FASP data transfer method failed because the license file (aspera-license) was not found on the source or target server.

System action

System operations continue. However, data cannot be transferred by using Aspera FASP technology unless a valid license file is installed.

User response

To resolve the issue, complete the following steps:

1. Obtain and install a valid license file.

Follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).

2. Retry the node replication or data protection operation.

ANR36 73E One of the FASP related files is invalid or corrupt.

Explanation

A server replication process attempted to use IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer. Either the source or target server lacked a valid Aspera license file.

System action

Server replication will not proceed until the communication method is changed or a valid set of files is obtained and installed.

User response

To resolve the issue, take the following actions:

- Obtain an Aspera license file and copy it to the server bin directory under the file name aspera-license.
- Obtain an Aspera configuration file and copy it to the server bin directory under the file name aspera.config.
- Obtain the faspstream component of the Aspera software development kit and copy the file to the server bin directory under the file name faspstream.

To obtain the required files, follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).

ANR36 74E Unable to find aspera.conf file on *server_loc* server.

Explanation

Server replication attempted to use fasp as the communication method and either the source or target server lacked the appropriate aspera.conf file.

System action

Server replication will not proceed until the communication method is changed or a valid Aspera configuration file is obtained and installed.

User response

Obtain an Aspera configuration file and place it in the server bin directory as aspera.conf.

ANR36 75E The faspstream executable was not found on the *server_loc* server.

Explanation

A server replication process attempted to use IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer. Either the source or target server lacked the appropriate faspstream executable file.

System action

Server replication will not proceed until the communication method is changed or a valid Aspera faspstream executable file is obtained and installed.

User response

Obtain an Aspera faspstream executable file and copy it to the server bin directory under the faspstream file name. To obtain a valid file, follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).

ANR36 76E Storage pool *storage pool* is actively being converted and cannot perform any data movement or deletion.

Explanation

Conversion is in progress for the storage pool.

System action

The storage pool cannot perform the command.

User response

Cancel all CONVERT STPGOOL processes for this stgpool, or wait until they have completed.

ANR36 77E Storage pool *storage pool* is either converted or is being converted and cannot be the target of a migration or

reclamation operation.

Explanation

The storage pool is in a conversion state and cannot be the target of migration or reclamation.

System action

The request will be denied for the storage pool.

User response

Update the stgpool that is attempting to migrate or reclaim into the converted stgpool to point to a valid target.

ANR36 78E Unable to initialize FASP driver - thread creation failed.

Explanation

The server is unable to initialize the FASP driver due to an error creating a server thread.

System action

Server operation continues, but FASP support is inoperative.

User response

This error often results from a lack of memory. Ensure that your system has sufficient paging space to support the current activities.

ANR36 79W You cannot convert data that is stored in copy storage pools or active-data storage pools. When you issue the

CONVERT STGPOOL command, copies of files that are stored in primary storage pool storage pool are deleted. You must update copy storage pools and active-data storage pools that are used by Disaster Recovery Management.

Explanation

When the storage pool is successfully converted, all data and copies of data in existing storage pools are removed. Use the **PROTECT STGPOOL** command to protect data in container storage pools or use the **REPLICATE NODE** command to replicate data in other types of storage pools. Use the **SET DRMCOPYSTGPOOL** and the **SET DRMACTIVEDATASTGPOOL** commands to specify the names of the copy storage pools and active-data storage pools to recover data from after a disaster.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to convert the storage pool or 'N' to stop the process.

ANR36 80W The storage pool conversion is

cancelled for storage pool pool name.

Explanation

During conversion processing, for the storage pool that is specified, the conversion process was cancelled. The server might display this message more several times during the conversion cancellation.

System action

The storage pool conversion is ended and server operation continues.

User response

To convert the storage pool again, reissue the **CONVERT STGPOOL** command.

ANR36 81E The license file that is required to enable Aspera Fast Adaptive Secure Protocol (FASP) technology has expired on the server_loc server.

Explanation

An attempt to use the IBM Aspera FASP data transfer method failed because the license file has expired on the source or target server.

System action

System operations continue. However, data cannot be transferred by using Aspera FASP technology unless a valid license file is installed.

User response

To resolve the issue, complete the following steps:

1. Obtain and install a valid license file. Follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).
2. Retry the node replication or data protection operation.

ANR36 82W Container container name is empty and cannot be moved.

Explanation

You cannot move an empty container.

System action

The container is skipped. Server operation continues.

User response

Reissue the **MOVE CONTAINER** command for a container that contains data.

ANR36 83E Source storage pool storage pool is converting to a directory-container storage pool and cannot be renamed.

Explanation

Conversion is in progress for the source storage pool.

System action

The source storage pool cannot be renamed during conversion processing.

User response

When conversion completes, reissue the **RENAME STGPOOL** command again.

ANR36 84I The evaluation license *id* that is required to enable Aspera Fast Adaptive Secure Protocol (FASP) technology will expire in *days* days.

Explanation

The IBM Aspera FASP data transfer license file will expire on the source or target server.

System action

System operations continue. However, unless a long-term license is acquired, data transfer with Aspera FASP technology will eventually become unavailable.

User response

To resolve the issue, obtain and install a valid license file. Follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).

ANR36 85W The license file that is required to enable Aspera Fast Adaptive Secure Protocol (FASP)

technology expires today.

Explanation

The IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer license file will expire on the source or target server.

System action

System operations continue. However, unless a long-term license is acquired, data transfer with Aspera FASP technology will eventually become unavailable.

User response

To resolve the issue, obtain and install a valid license file. Follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).

ANR36 86W Source storage pool *source_pool* is referenced by Disaster Recovery Management. After conversion, you cannot restore data to the source storage pool and disaster recovery might fail.

Explanation

When conversion starts, the source storage pool cannot ingest or store new data. Use the **QUERY DRMSTATUS** command and the **SET DRMPRIMSTGPOOL**

command to view and update primary storage pools that are used by Disaster Recovery Management.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to convert the storage pool or 'N' to stop the process.

ANR36 87E Transaction failed for session *session number* for node *node name* (*client platform*) - container transaction timeout encountered.

Explanation

The server ends a database update transaction for the specified client because the client did not commit the transaction before the timeout period. The timeout period is controlled by the **CONTAINERRESOURCE TIMEOUT** option

System action

The specified session is ended and server operation continues.

User response

Determine why the operation did not commit the transaction within the timeframe specified by the option. The option might need to be increased to allow for

the ingest operation to commit the transaction over a longer period of time.

ANR36 88E A file was skipped while moving data to storage pool *storage pool name*. File name *file name* for Node *node name*, File space *filespace name* is excluded because of its size.

Explanation

The server skips the specified file for the move operation. The size of the file is larger than that allowed in the storage pool based on the **MAXSIZE** parameter setting.

System action

The file is skipped by the data movement process.

User response

Increase the maximum file size for the target storage pool. An authorized administrator can increase the **MAXSIZE** parameter by issuing the **UPDATE STGPOOL** command. The file can also be moved to another storage pool that allows for storage of larger objects.

ANR36 89E Invalid container header found for container *container name* and cannot be moved.

Explanation

A container file selected for a move operation contains an invalid header and will not be moved.

System action

The container is skipped. Server operation continues.

User response

Run the AUDIT CONTAINER command for the container.

ANR36 90W Invalid header found during replication of objects in pool *pool name*. These objects have been marked damaged.

Explanation

A file selected for a replication operation contains an invalid header and will not be moved.

System action

The object is marked damaged. Server operation continues.

User response

Run the AUDIT CONTAINER command for the container.

ANR36 91E The transaction failed for process *process name*, process number *process number*, because of a transaction timeout.

Explanation

The server ended the database update transaction for the specified process because the transaction was not committed within the timeout period. The timeout period is controlled by the CONTAINERRESOURCE TIMEOUT option.

System action

The specified process ended, but server operation continues.

User response

To resolve the issue, complete the following steps: 1. Determine why the operation did not commit the transaction within the specified time. 2. If necessary, increase the timeout period. For example, to set a timeout period of 4 hours, specify the following option: containerresource timeout 240

ANR36 92W A client backup anomaly was detected for node *node name*, session number *number*. The average number of backed up bytes is *bytes*, the actual number of backed up bytes was *bytes*, the average data deduplication is *percent number percent*, and the actual data deduplication was *percent number percent*.

Explanation

The server detected a workload anomaly from a backup-archive client. Either the number of backed-up bytes exceeds the normal average, or the data deduplication percent is much less than the average data deduplication percent.

System action

Server operation continues.

User response

Review the data to determine whether the appropriate data was backed up and to identify possible issues.

ANR36 93W An incremental backup anomaly was detected for the virtual machine (VM) *VM name*, VM owner, *VM owner name*, session number *number*. The average number of backed-up bytes was *bytes*, the actual number of backed-up bytes was *bytes*.

Explanation

The server detected a workload anomaly from a VM. The number of backed-up bytes exceeds the normal average.

System action

Server operation continues.

User response

Review the data to determine whether the appropriate data was backed up and to identify possible issues.

ANR36 94W Command: This command removes the storage pool protection relationship.

Explanation

Data from the specified directory-container storage pool will no longer be copied to another storage pool as part of the storage pool protection process.

System action

You will be prompted to continue, or to cancel the command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR36 95E The Command command was not processed because storage pool *storage pool name* cannot be used as the next storage pool for data migration.

Explanation

When the STGTYPE=COLDDATACACHE parameter value is set, the NEXTSTGPOOL parameter must be set to a storage pool that uses a tape-based device class, is not deduplicated, and does not have a next storage pool defined.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command with parameters that are valid for the storage type.

ANR36 96E *The Command command was not processed. The specified storage pool storage pool name, must be a directory-container storage pool or a cloud-container storage pool.*

Explanation

When you issue the command, you can specify the STANDARDPOOL parameter. Only directory-container storage pool or cloud-container storage pool types are permitted. Other types of storage pools are not valid.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command and specify the STANDARDPOOL=CONTAINERPOOL parameter value.

ANR36 97E *The Command command was not processed. The specified*

storage pool storage pool name, must be a cold-data-cache storage pool.

Explanation

When you issue the command, you can specify the COLDPOOL parameter. Only cold-data-cache storage pool types are permitted. Other types of storage pools are not valid.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command and specify the COLDPOOL=COLDDATACACHEPOOL parameter value.

ANR36 98E *The Command command was not processed because policy domain domain name is not an object domain.*

Explanation

You can issue the specified command only for policy domains that are defined as object domains. A policy domain can be defined as an object domain by issuing the DEFINE OBJECTDOMAIN command.

System action

System operation continues, but the server

does not process the command.

User response

Reissue the command with a valid policy domain.

ANR36 99E *Command: The parameter parameter is not valid for cold-data-cache storage pools or for the specified next storage pools of cold-data-cache storage pools.*

Explanation

The specified command was issued with a parameter that is not valid for storage pools of type COLDDATACACHE or for the specified next storage pools of COLDDATACACHE storage pools. (The next storage pool is specified with the NEXTSTGPOOL parameter.)

System action

System operation continues, but the server does not process the command.

User response

To resolve the issue, take one of the following actions:

- Reissue the command for a different storage pool type.
- Reissue the command without the invalid parameter.

ANR37 00E *Command: The command was not processed*

because it is not valid for cold-data-cache storage pools or for the specified next storage pools of cold-data-cache storage pools.

Explanation

The specified command is not valid for storage pools of type COLDDATACACHE or for the specified next storage pools of COLDDATACACHE storage pools. (The next storage pool is specified with the NEXTSTGPOOL parameter.)

System action

System operation continues, but the server does not process the command.

User response

Reissue the command with a valid storage pool type.

ANR37 01E *Cannot connect to the cloud service provider for the operation_name operation on the generic_name connection or storage pool.*

Explanation

A request to the cloud service provider failed because the client system is not connected to the cloud server.

System action

The activity that generated this error fails.

User response

Ensure that you specify valid credentials for the connection to the cloud server and that the client system can communicate with the cloud server.

ANR37 02E **Cannot connect to the cloud service provider for the operation_name operation on the generic_name connection or storage pool.**

Explanation

The connection to the cloud provider failed because the cloud service provider that is specified in the DEFINE STGPOOL command is not valid.

System action

The activity that generated this error fails.

User response

Ensure that you specify valid credentials for the connection to the cloud server and that the client system can communicate with the cloud server.

ANR37 03E **Source file(line number): Unable to connect to the cloud provider.**

Explanation

An error occurred while attempting to connect to the cloud provider.

System action

The activity that generated this error fails.

User response

Ensure that you specify valid credentials for the connection to the cloud and that the client system can communicate with the cloud.

ANR37 04E **Source file(line number): Unable to load the JVM for the cloud storage pool.**

Explanation

An error occurred while attempting to load the Java virtual machine (JVM) for the cloud storage pool.

System action

The activity that generated this error fails.

User response

To resolve the issue, complete the following steps:

1. Verify that the IBM Storage Protect server is correctly installed by ensuring that the Java Archive (JAR) files are in the installation directory.
2. If the issue persists, retrieve the first-failure data capture (FFDC) log files from the server. For instructions about retrieving the FFDC log files, see the Problem Determination Guide.
3. Contact IBM Software Support for assistance.

ANR37 05E **Source file(line number): A required Java archive (JAR) file cannot be**

located, or the required resources within the JAR file are unavailable.

Explanation

Some IBM Storage Protect operations require the use of a Java virtual machine (JVM) and Java code running in that virtual machine. This code is contained in JAR files. JAR files might be missing, incorrectly located, or lacking the necessary resources. Another possibility is that the JAR files and the IBM Storage Protect version are mismatched.

System action

Any capabilities that require the JVM will not work.

User response

To resolve the issue, complete the following steps:

1. Verify that the IBM Storage Protect server is correctly installed by ensuring that the JAR files are in the installation directory.
2. If the issue persists, retrieve the first-failure data capture (FFDC) log files from the server. For instructions about retrieving the FFDC log files, see the Problem Determination Guide.
3. Contact IBM Software Support for assistance.

ANR37 06W **Reorganization is required on**

table table name, which is excluded from online reorganization.

Explanation

The specified table was excluded from online reorganization by the DISABLEREORGTABLE server option.

System action

Server operation continues.

User response

A failure to reorganize tables when necessary can lead to database growth and server performance degradation over time. If you experience either of these symptoms, consider running an offline reorganization of the specified table. For instructions, see the section about offline table reorganization in Technote 1683633: http://www.ibm.com/support/docview.wss?uid=swg21683633#offline_table_reorg

ANR37 07E **An unexpected error occurred while when the storage pool directory was opened or when data was written to the storage pool directory. The access mode for storage pool directory Directory Name in storage pool Pool Name was**

changed to
Access Mode.

Explanation

The access mode is changed for the specified storage pool directory.

System action

Client nodes cannot access the storage pool and server processes cannot be completed.

User response

Ensure that the storage pool directory is accessible on the file system. To change the access mode, issue the UPDATE STGPOOLDIR command and specify the ACCESS parameter.

ANR37 The storage pool 08E *stgpool name cannot be defined as a cloud storage pool with this operating system.*

Explanation

The command cannot be processed on this operating system.

System action

The server does not process the command.

User response

Use an operating system that is compatible with IBM Storage Protect to issue the command. For information about operating systems that are supported by IBM Storage Protect, see technote 1243309

"Overview - IBM Storage Protect Supported Operating Systems" (<http://www-01.ibm.com/support/docview.wss?uid=swg21243309>).

ANR37 Container 09W *container name was permanently deleted from the file system.*

Explanation

The specified container could not be found in the database. For this reason, the container was deleted from the file system.

System action

The container is no longer available, but system operation continues.

User response

No action is required.

ANR37 This command 10I *will delete container container name from the file system.*

Explanation

Because the specified container could not be found in the database, it will be deleted from the file system.

System action

You are prompted to confirm the action.

User response

Enter 'Y' to delete the container from the file system or 'N' to cancel the command.

ANR37 Container 11E *container name will not be removed from the file system.*

Explanation

The container will not be removed because its header could not be validated.

System action

System operation continues.

User response

To manually remove the container from the file system, delete the file. If the server is installed on an AIX, Linux, or Solaris system, issue the following command: rm container_name If the server is installed on a Windows system, issue the following command: del container_name

ANR37 Command: 12E *Storage pool NEXTSTGPOOL: storage pool name is a cloud pool.*

Explanation

The command indicated specifies the name of a storage pool which is a cloud pool. The command syntax requires that a cloud storage pool name not be specified for non-container storage pools.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool name.

ANR37 Container 13W *Container Name was marked for deletion but stgpool directory Stgpool Directory is unavailable.*

Explanation

The container had no chunks on it and was marked for deletion. Deletion failed because the container's stgpool directory access was not available.

System action

The system will not remove this container until the stgpool directory's access is available.

User response

Update the stgpool directory's access to read/write and wait for container deletion to occur again.

ANR37 The server 14E *cannot connect to the cloud service provider with the cloud URL, url, for the operation_name operation on the generic_name connection or storage pool.*

Explanation

The connection to the cloud service provider failed because the

cloud URL that is specified in the DEFINE CONNECTION or DEFINE STGPPOOL command cannot be resolved.

System action

Server operations continue, but the process that generated the error message fails.

User response

To resolve the issue, complete the following steps: 1. Verify that the cloud URL is valid and was entered correctly. 2. Verify that the user ID and password for the cloud connection or storage pool are valid and were entered correctly. 3. Verify that the cloud provider is active. 4. Correct any detected issues and retry the failed process.

To remove damaged data from a cloud storage pool without communicating with the cloud provider, issue the AUDIT CONTAINER command with the ACTION=MARKDAMAGED parameter setting to mark all data in the container as damaged. Then, run the AUDIT CONTAINER command again with the ACTION=REMOVEDAMAGED parameter setting.

ANR37 15E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with the following HTTP status: *error_message*.

Explanation

A request to the cloud service provider failed. The credentials for the cloud service provider do not have the correct permissions to perform the activity that generated this error.

System action

The activity that generated this error fails.

User response

Ensure that the permissions are correct for the credentials that are specified for the connection to the cloud server.

ANR37 16E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with the following HTTP status code: *http_status_code*.

Explanation

A request to the cloud service provider failed. The cloud service provider responded with a non-successful HTTP status code.

System action

The activity that generated this error fails.

User response

Review the following list of HTTP status codes you

might encounter in this situation:

- 401 Unauthorized: The request was valid, but authentication was required and failed, or authentication was not provided.
- 403 Forbidden: The request was valid, but the server refused to respond to it.
- 404 Not Found: The requested resource could not be found, but it might be available again in the future.
- 409 Conflict: The request could not be processed because of a conflict in the request.

For more information about HTTP status codes, consult your object storage provider.

ANR37 17E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with the following HTTP status: CREDENTIAL_ERROR.

Explanation

A request to the cloud service provider failed. The cloud service provider credentials do not exist.

System action

The activity that generated this error fails.

User response

Ensure that the credentials that are provided to the cloud server exist on the cloud service provider.

ANR37 18E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed because the cloud connection was lost.

Explanation

A request to the cloud service provider failed. The connection to the cloud service provider was lost.

System action

The activity that generated this error fails.

User response

Ensure that the cloud server is still turned on.

ANR37 19E The *operation_name* operation on the *generic_name* connection or storage pool failed because the *container_name* cloud container does not exist.

Explanation

A request to the cloud provider failed. The cloud container that was requested does not exist.

System action

The activity that generated this error fails.

User response

Verify that the container has not been removed from the cloud server.

If you want to remove data from a cloud storage pool without communicating with the cloud provider, issue the AUDIT CONTAINER ACTION=MARKDAMAGED command to mark all data on the container as damaged, and then issue the AUDIT CONTAINER command with ACTION=REMOVEDAMAGED FORCEORPHANDBDEL=YES to remove the data.

ANR37 20E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with a HTTP protocol error.

Explanation

A request to the cloud service provider failed from a HTTP error.

System action

The activity that generated this error fails.

User response

None.

ANR37 21E A request to the cloud service provider for the *operation_name*

operation on the *pool_name* storage pool failed with an internal error.

Explanation

A request to the cloud provider failed because of an internal error.

System action

The activity that generated this error fails.

User response

None.

ANR37 22E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with a creation error.

Explanation

A request to the cloud service provider failed because output cannot be written to an XML file.

System action

The activity that generated this error fails.

User response

None.

ANR37 23E A request to retrieve cloud metrics for the *operation_name* operation on the *generic_name* connection or storage pool failed with an internal error.

Explanation

A request to retrieve cloud metrics failed because of an internal error.

System action

The activity that generated this error fails.

User response

None.

ANR37 24E Command: Data in storage pool *storage pool name* is not protected on server *target server name*.

Explanation

The specified storage pool has not been protected by the replication target server.

System action

System operation continues, but the server does not process the command.

User response

1. If you have not specified a target replication server, issue the SET REPLSERVER command to specify the target replication server that will be used to protect the storage pool. The name specified in the SET REPLSERVER command must be associated with a valid server definition. 2. Issue the PROTECT STGPPOOL command with a value of TYPE=REPLSERVER for the specified storage pool. For example, if

the source storage pool is named POOL1, issue the following command: protect stgpool pool1 type=replserver By issuing the command, you restore the protect setting on the specified storage pool. 3. Retry the command that previously failed.

ANR37 25E Objects on the cloud provider for the following storage pool *storage pool name* are not deleted.

Explanation

The cloud provider is not available to delete a cloud object.

System action

The server deletes the objects from the database.

User response

Ensure that the cloud server is on and that the credentials are correct. To remove the cloud objects that remain on the cloud server, issue the AUDIT CONTAINER command.

ANR37 26I The AUDIT DATABASE command is processing for all container storage pools. Do no complete storage pool operations during this process.

Explanation

The AUDIT DATABASE command scans multiple tables in the database.

Storage pool operations that are processing when you issue the AUDIT DATABASE command might affect the audit result.

System action

Confirm whether to proceed with the AUDIT DATABASE command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR37 AUDIT 27E CONTAINER:
The STGPOOLDIRECTORY parameter cannot be used on this cloud-container storage pool because local storage is not available for this storage pool.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify that local storage is available for the cloud-container storage pool, and reissue the command.

ANR37 MOVE 28E CONTAINER:
You cannot move the following container: *container name*.

Explanation

The container that you specified is a cloud container. The MOVE CONTAINER command does not apply to cloud containers.

System action

The command fails and the server operation continues.

User response

Select a different type of container to move.

ANR37 The AUDIT 29I CONTAINER
command process *process id* completed: *delete object count* damaged objects are deleted. *skip object count* damaged objects are skipped. *delete dependent object count* dependent objects are deleted. *delete cloud orphan object count* orphan objects are deleted in cloud-container storage pools. *skip cloud orphan object count* orphan objects are skipped in cloud-container storage pools.

Explanation

When you issue the AUDIT CONTAINER command and specify the

ACTION=REMOVEDAMAGED parameter, the following information is displayed:

- The number of damaged objects that are deleted.
- The number of damaged objects that are skipped.
- The number of dependent objects that are deleted.
- The number of cloud orphan objects that are deleted.
- The number of cloud orphan objects that are skipped.

The objects being processed are inventory files, data extents, or both.

System action

System operations continue

User response

No action is required.

ANR37 The audit 30E container operation
process_id failed because it cannot communicate with the cloud provider for container *container_name*.

Explanation

The AUDIT CONTAINER command failed either because the correct credentials were not provided to the cloud provider or because the cloud provider is inactive.

System action

The AUDIT CONTAINER command failed.

User response

Verify that the user ID and password for the cloud storage pool are correct and have been entered correctly, and verify that the cloud provider is active.

To remove damaged data from a cloud storage pool without communicating with the cloud provider, issue the AUDIT CONTAINER ACTION=MARKDAMAGED command to mark all data on the container as damaged.

ANR37 A request to the 31E cloud service provider for the operation_name operation on the generic_name connection or storage pool failed with the 503 HTTP status code.

Explanation

The status code indicates that the operation cannot proceed. The cloud provider cannot process further incoming requests. There might be a hardware limitation or an issue with the configuration settings.

System action

The server is running, however, the cloud service provider cannot respond to the request.

User response

Verify with your system administrator that the cloud service provider has the correct configuration settings and enough dedicated hardware to accept additional requests.

- Proxy-server.conf; [default] node_timeout = 120, [app:proxy-server] conn_timeout = 120.
- Object-server.conf; [default] node_timeout = 60, [app:object-server] set node_timeout = 60.

In each .conf file, either set 'workers = auto' or set that configuration equal to a value no greater than the number of cores on the system.

ANR37 32E **Storage pool *poolname* cannot be updated because of an encryption key mismatch.**

Explanation

The master encryption key changed since this pool was enabled for encryption. The storage pool cannot be updated without the original master encryption key.

System action

The command fails.

User response

If you used the BACKUP DB command to protect the server master encryption key, use the RESTORE DB command

to restore the original master encryption key.

ANR37 33W **The master encryption key cannot be generated because the server password is not set.**

Explanation

Without a master encryption key, storage pool encryption is disabled.

System action

The master encryption key is not generated.

User response

Use the SET SERVERPASSWORD command to set a server password. After you set the password, the master key is automatically generated.

ANR37 34E **Storage pool encryption could not be enabled because the server has not been configured to protect the encryption keys using database backup.**

Explanation

Database backup must be configured to protect the master encryption key to enable stgpool encryption.

System action

The command fails.

User response

To protect the server master encryption key during database backup, specify the PROTECTKeys=Yes and PASSWORD parameters on the SET DBRECOVERY command.

ANR37 35W **The protect storage pool process for *stgpool name* on *this server* to *stgpool name* on *other server* is complete. Some extents might not have been protected. Extents protected: *extents protected of extents to protect*. Extents failed to protect: *extents failed to protect*. Extents deleted: *extents deleted of extents to delete*. Amount protected: *amount protected of amount to protect*. Amount failed: *amount transferred*. Amount transferred: *amount transferred*. Elapsed time: *elapsed time*.**

Explanation

The protect storage pool process completed but some extents might have been skipped due to conflicting operations. The following list

describes the information in the message:

- Extents protected: Extents that were successfully protected by being linked to matching extents on the target server.
- Extents failed to protect: Extents that were not successfully protected during the process of protecting to the target server.
- Extents deleted: Extents that were successfully deleted from the target server because the extent did not exist on the source server or because it was damaged on the target server and needed to be resent.
- Amount protected: Bytes that were successfully protected by being linked to matching extents on the target server.
- Amount failed: Bytes that were not protected. See previous messages for further details.
- Amount transferred: Bytes that were sent to the target server during this process. The amount that was transferred can be less than the amount that is protected when the target server already has some of the extents or when compression is enabled.
- Elapsed time: How long the process ran.

User response

Issue the PROTECT STGPPOOL command again to ensure that all

data extents are scanned and protected.

ANR37 36E The requested data with the key key for the operation_name operation on the generic_name connection or storage pool was not found in the container_name cloud container. The container should be audited to validate its contents.

Explanation

The requested data was not found on the cloud service provider.

System action

The command fails.

User response

Run the AUDIT CONTAINER command on the container or storage pool.

ANR37 37E One or more orphaned extents in the container_name container in the stgpool_name storage pool were skipped because the extents could not be deleted from the cloud.

Explanation

One or more orphaned extents could not be deleted from the cloud, so they were not removed from the database. This might be a result of lack

of connectivity to the cloud service provider.

System action

The orphaned extents that were not deleted from the cloud are skipped. They remain orphaned in the database.

User response

Verify that the cloud URL, user ID, and password for the cloud-container storage pool are correct and were entered correctly. Also, verify that the cloud provider is active. Reissue the AUDIT CONTAINER command with the ACTION=REMOVEDAMAG ED parameter specified to remove the orphaned extents.

If the cloud provider is inactive or inaccessible, and the references to the orphaned extents should be removed from the database anyway, reissue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAG ED and FORCEORPHANDBDEL=YES parameters.

ANR37 38I Command: Storage pool storage pool name still has one or more containers.

Explanation

A DELETE STGPOOL command encountered a storage pool that still contains one or more containers.

System action

The server does not process the command.

User response

Empty containers are automatically deleted every few minutes. Wait for the automatic deletion of the empty containers, then reissue the command.

ANR37 40E One or more orphaned extents in the stgpool_name storage pool were skipped because the extents could not be deleted from the cloud.

Explanation

One or more orphaned extents could not be deleted from the cloud, so they were not removed from the database. This might be a result of lack of connectivity to the cloud service provider.

System action

The orphaned extents that were not deleted from the cloud are skipped. They remain orphaned in the database.

User response

Verify that the cloud URL, user ID, and password for the cloud-container storage pool are correct and were entered correctly. Also, verify that the cloud provider is active. Reissue the AUDIT CONTAINER command with the ACTION=REMOVEDAMAG

ED parameter specified to remove the orphaned extents.

If the cloud provider is inactive or inaccessible, and the references to the orphaned extents should be removed from the database anyway, reissue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAG ED and FORCEORPHANDBDEL=YES parameters.

ANR37 41E Failed to update the stgpool_name storage pool: cannot change from the current_cloud_type cloud type to the new_cloud_type cloud type.

Explanation

An UPDATE STGPOOL command resulted in error because of an incompatible change in cloud type. To minimize accidental errors, you cannot change from the current cloud type to the cloud type you specified.

System action

The command fails and server operation continues.

User response

If you still need to update the storage pool, reissue the UPDATE STGPOOL command and make sure that the CLOUDTYPE parameter is set to a value that is compatible with the current cloud type of the storage pool. Another option is to not

specify a value for the CLOUDTYPE parameter.

ANR37 42W This command attempts to update the *stgpool_name* storage pool. One or more of the attributes being updated by this command might affect your ability to access existing data in this storage pool.

Explanation

The execution of an UPDATE STGPOOL command with the parameters that have been specified by this command might prevent you from accessing existing data.

System action

The system asks the administrator whether to continue with the command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR37 43E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with an exception.

Explanation

The cloud client encounters an exceptions in processing the

operation_name cloud operation.

System action

The *operation_name* cloud operation is ended and server operation continues.

User response

Use the QUERY ACTLOG command to examine messages prior to this error and examine FFDC (First Failure Data Capture) file to determine the cause of the operation failure. If the cause of the failure can be found and resolved, reissue the command. If the cause of failure cannot be found, contact your service representative for assistance in resolving the problem.

ANR37 44I Session session number was started for Aspera FASP high speed data transfer and is paired with replication session session number.

Explanation

A new server session was initiated for high speed data transfer using IBM Aspera Fast Adaptive Secure Protocol (FASP) technology. The parent session number is included in the message.

System action

The server begins a FASP communications session to service the process.

User response

No action is required.

ANR37 45I Session session number ended for Aspera FASP high speed data transfer.

Explanation

An IBM Aspera Fast Adaptive Secure Protocol (FASP) session has completed normally.

System action

Server operation continues.

User response

No action is required.

ANR37 46E The *operation_name* operation on the *generic_name* connection or storage pool failed because the *container_name* bucket or vault does not exist in this region or access pool.

Explanation

A request to the cloud provider failed. The bucket or vault that was requested does not exist in the region or access pool pointed to by the storage pool.

System action

The activity that generated this error fails.

User response

Ensure that the CLOUDURL value for this

storage pool is directed to a location that can access the bucket or vault.

ANR37 47E command: The parameter is not supported on this platform or with this configuration.

Explanation

The command cannot be processed as specified because the platform does not support the feature required by the given parameter, or the configuration of the server has not enabled the feature.

System action

The server ignores the command.

User response

Verify the command syntax, platform, and configuration then reissue the command.

ANR37 48E The license file that is required to enable Aspera Fast Adaptive Secure Protocol (FASP) technology has expired on the *server_loc* server.

Explanation

An attempt to use the IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer method failed because the license file has expired on the source or target server.

System action

System operations continue. However, data cannot be transferred by using Aspera FASP technology unless a valid license file is installed.

User response

To resolve the issue, complete the following steps:

1. Obtain and install a valid license file. Follow the instructions in technote 7047418 (<http://www.ibm.com/support/docview.wss?uid=swg27047418>).
2. Retry the node replication or data protection operation.

ANR37 49I An Aspera evaluation license is in use to support FASP data transfer.

Explanation

An IBM Aspera Fast Adaptive Secure Protocol (FASP) high speed data transfer session was established using a 30-day Aspera evaluation license.

System action

Server operation continues.

User response

The evaluation license is valid for 30 days after it is generated. To replace the evaluation license with a long-term license, purchase the IBM Storage Protect High Speed Data Transfer product, which is available at the Passport Advantage website.

ANR37 51E The specified credentials failed verification because the *container_name* bucket or vault does not exist in this region or access pool.

Explanation

To use this bucket or vault, the CLOUDURL parameter must match the region or access pool in which this bucket or vault exists.

System action

None.

User response

Ensure that the CLOUDURL value for this storage pool is directed to a location that can access the bucket or vault.

ANR37 52E The container cannot be moved. Storage pool encryption is in progress for the associated storage pool *storage pool name*.

Explanation

The container cannot be moved because the associated storage pool is specified by the ENCRYPT STGPOOL command. Storage pool encryption is in progress.

System action

The server does not move the container that is specified.

User response

Wait for storage pool encryption to complete and rerun the action again.

ANR37 53I The client update package manager is started.

Explanation

The update package manager starts automatically when the server is initialized or when status monitoring is turned on.

System action

Server operation continues.

User response

No action is required.

ANR37 54I The client update package manager is stopped.

Explanation

The update package manager stops when status monitoring is turned off.

System action

Server operation continues.

User response

No action is required.

ANR37 55E No directory is specified for downloading client update packages.

Explanation

Because the directory is not specified, no client update packages were downloaded. The client update package manager will retry the download process at the next refresh time.

System action

Server operation continues.

User response

Specify the directory for downloading client update packages by using the SET DEPLOYREPOSITORY command. For example, if the directory is client/packages, issue the following command: set deployrepository / client/packages/

ANR37 56I A refresh of client update packages was started.

Explanation

The client update package manager is providing the latest client fix packs to the server.

System action

Server operation continues.

User response

No action is required.

ANR37 57I The refresh of client update packages is complete. The next refresh will be started on *date at time*.

Explanation

The client update package manager provided the latest client fix packs to the server. The fix packs are available for client updates.

System action

Server operation continues.

User response

No action is required.

ANR37 58W Client update package *package name* could not be found. The package is skipped.

Explanation

The specified package was not imported. The client update package manager will try to import the package during the next client update cycle.

System action

Server operation continues.

User response

No action is required.

ANR37 59E An error occurred during the replication of client update packages from node *update node name* to the monitored server, *server name*. The return code is *number*.

Explanation

The refresh of client update packages is stopped. The client update manager will retry the process at the next specified refresh time.

System action

Server operation continues.

User response

To determine why the replication failed, review previous server messages and take action to resolve the issues.

ANR37 60I All client update package information was removed successfully.

Explanation

The client update packages were removed in the database. These packages are retried the next time the client update package manager runs.

System action

Server operation continues.

User response

No action is required.

ANR37 61E Command: An error was encountered while removing the client update package information from the database. The error code is *Error code*.

Explanation

An error was encountered while processing a request to remove the client update packages from the database.

System action

None.

User response

Inspect the activity log and the first-failure data capture log, *dsmffdc.log*, for errors related to the command. Correct the condition that caused the error and reissue the command.

ANR37 62E Cannot connect to the download site at *Url* to download the files that are required for client updates.

Explanation

A request to connect to the specified URL failed because the client system cannot connect. One or more client update packages cannot be downloaded, or the update packages might be down-level.

System action

The connection to the download site fails.

User response

Verify that you have a working network connection. Ensure that the URL that is specified in the CLIENTDEPLOYCATALOG URL server option is valid by issuing the QUERY

OPTION CLIENTDEPLOYCATALOG URL command.

ANR37 63E An error occurred while the catalog file used for client updates was downloading from *Url*.

Explanation

The catalog file failed to download from the specified URL. One or more update packages cannot be downloaded or the update packages might be down-level.

System action

The client update package or catalog file is not downloaded.

User response

Verify that you have a working network connection to the specified URL and that you have enough space to store the catalog file. Issue the QUERY MONITORSETTINGS command to verify that you specified a valid client update repository.

ANR37 64E An error occurred while processing the catalog file for client updates from *Path*.

Explanation

The catalog file cannot be processed. Client update package information might be unavailable or out-of-date. One or more update packages might be down-level.

or unavailable for deployment.

System action

The catalog file is not processed.

User response

Ensure that you have enough space to store the catalog file. Issue the QUERY MONITORSETTINGS command to verify that you specified a valid client update repository. If you are using a local copy of the catalog file, ensure that the file exists and that it is not corrupted. If the local copy is invalid, use the catalog file at the default URL that is specified in the CLIENTDEPLOYCATALOG URL server option. If the catalog file on that site is invalid, contact your service representative.

ANR37 65E An error occurred while a client update package was downloading from *Url*.

Explanation

A client update package failed to download from the specified URL. The failed package is not available for deployment until it is successfully downloaded.

System action

The failed package is not downloaded.

User response

Verify that you have a working network connection to the specified URL and that you have enough space to store the package file. Issue the QUERY MONITORSETTINGS command to verify that you specified a valid client update repository.

ANR37 66W An error occurred while client update packages were downloading.

Explanation

One or more packages failed to download from the specified URL. The failed packages are not available for deployment until they are successfully downloaded.

System action

The failed packages are not downloaded.

User response

Issue the QUERY ACTLOG command to examine the messages that occurred prior to receiving this error. Examine the first failure data capture (FFDC) log to determine the cause of the operation failure. If the cause of failure cannot be found, contact your service representative for assistance in resolving the problem.

ANR37 67I All packages were successfully downloaded for client updates.

Explanation

All of the packages that are required for client updates were successfully downloaded to the file system.

System action

Server operation continues.

User response

None.

ANR37 68E The catalog file at *Url* does not exist or it cannot be read.

Explanation

The catalog file that is used for client updates is not available at the specified location or the server does not have permission to read the file.

System action

The catalog file is not processed.

User response

Verify that the catalog file exists at the specified path and that the server has read access for the file.

ANR37 69W Replication of client packages for client updates to monitored server, *server name*, was skipped.

Explanation

The replication was skipped for the specified

server owing to any of the following conditions:

- The specified server is unavailable.
- The specified server is not at the required minimum server level for automatic client updates.
- The specified server is temporarily unavailable because its client deployment information is currently being updated.
- The specified server is not eligible for client updates because it is disabled for client deployment functions.
- The specified server is not eligible for client updates because its archive retention protection feature is enabled.

If the specified server is skipped due to unavailability or because it is not at the required minimum server level, the client update package manager will retry replication at the next deploy package refresh time.

System action

Server operation continues.

User response

Start the specified server or upgrade the server to version 8.1.3 or later. If the server is skipped because it's archive retention protection is enabled then no action is needed. Replication of client updates is not allowed for a server for which

the archive retention protection feature is enabled. If the server is skipped because client deployment function has been disabled there is no action needed, or you can enable client deployment on the specified server with the SET DEPLOYPKGUPDATES command. If you reenable the server for client deployment the client update manager on the hub server will retry replication at the next client update refresh time.

ANR37 70E Command: The directory path, *path name*, does not exist on the system.

Explanation
The specified directory path does not exist.

System action
Server operation continues, but the command is not processed.

User response
Reissue the command with a valid path name.

ANR37 71E Command: Server is not configured for client updates.

Explanation
The server is not configured for client updates. The server must be configured as a Hub server.

System action
Server operation continues, but the command is not processed.

User response
Issue this command on a Hub server or use the Operation Center to configure your server as a Hub server.

ANR37 72E The upgrade repository directory at *Url* does not exist or it cannot be read or written to.

Explanation
The repository directory that is used for client updates is not available at the specified location or the server does not have permission to read and write to the directory.

System action
Client update packages are not downloaded.

User response
Verify that the repository directory exists at the specified path and that the server has read and write access for the directory.

ANR37 73I Client updates scheduled: *number* completed of *total number* schedules were created for *server name*.

Explanation
The request to create deploy schedules for one or more client nodes is completed successfully.

System action
Server operation continues.

User response
None.

ANR37 74E Client updates scheduled with failures: *number* completed of *total number* schedules were created for *server name*.

Explanation
The request to create deploy type schedules for one or more clients is completed. The specified number of schedules were not created due to errors.

System action
Server operation continues.

User response
Check messages in the activity log on the server to determine the reason for the error.

ANR37 75I Client updates canceled: *number* completed of *total number* schedules were canceled for *server name*.

Explanation
The request to cancel deploy type schedules for one or more client nodes is completed successfully for the specified server.

System action
Server operation continues.

User response
None.

ANR37 76E Client updates canceled with failures: *number* completed of *total number* schedules were canceled for *server name*.

Explanation
The request to cancel deploy type schedules for one or more client nodes completed with failures. The specified number of schedules for the server were not cancelled due to errors.

System action
Server operation continues.

User response
Check messages in the activity log on the specified server to determine the reason for the error.

ANR37 77I Import of client update packages started.

Explanation
The deployment package manager has started

importing the client update packages to the server.

System action

Server operation continues.

User response

None.

ANR37 78I Client update packages imported: *number completed of total number packages were imported.*

Explanation

The deployment package manager has finished importing client update packages to the server.

System action

Server operation continues.

User response

None.

ANR37 79E Client update packages imported with failures: *number of successes of total number packages imported.*

Explanation

The deployment package manager has finished importing client update packages to the server. There were some client update packages that did not get imported due to failures.

System action

Server operation continues.

User response

Check messages in the activity log on the specified server to determine the reason for the error. Correct the errors. The deployment package manager will retry importing them at the next deployment package refresh time.

ANR37 80I Replication of client update packages started to server *server name.*

Explanation

The deployment package manager has started replicating the client update packages to the specified server.

System action

Server operation continues.

User response

None.

ANR37 81I Client update packages were successfully replicated to server *server name.*

Explanation

The deployment package manager has finished replicating client update packages to the specified server successfully.

System action

Server operation continues.

User response

None.

ANR37 82E Replication of client update packages ended with failures to server *server name.*

Explanation

The deployment package manager has finished replicating update client packages to the server. There were some client update packages that did not get replicated due to errors.

System action

Server operation continues.

User response

Check messages in the activity log on the specified server to determine the reason for the error. Correct the errors. The deployment package manager will retry the replication at the next deployment package refresh time.

ANR37 83E A client update was not scheduled for node *node name* on server *server name.*

Explanation

The client update schedule was not created due to an error.

System action

The schedule is not created. Server operation continues.

User response

Review the related activity log messages on the specified server to determine the cause of the error.

ANR37 84E Node *node name* was not associated with the client update schedule *schedule name* on server *server name.*

Explanation

The client was not associated with the update schedule due to an error.

System action

The client is not associated with the schedule. Server operation continues.

User response

Review the related activity log messages on the specified server to determine the cause of the error. You can use the Operations Center to cancel the schedule or issue the DEFINE ASSOCIATION command to manually associate the client with the schedule.

ANR37 85E The client update schedule *schedule name* was not canceled for

node *node name* on server *server name*.

Explanation

The update schedule was not canceled due to an error.

System action

The schedule is not canceled. Server operation continues.

User response

Review the related activity log messages on the specified server to determine the cause of the error. You can use the Operations Center to try canceling the schedule again or issue the DELETE SCHEDULE command on the server to manually delete the schedule.

ANR37 86E Server *server name* cannot create or cancel client updates because the server is unavailable or has an unsupported software version installed.

Explanation

Update schedules cannot be created or canceled on the specified server.

System action

Client update operations are skipped for the specified server. Server operation continues.

User response

Ensure that the server is running and that there are no network issues. If the server is running an earlier software version, upgrade to Version 8.1.3 or later.

ANR37 87I The client update catalog was downloaded successfully from URL *URL*

Explanation

The deployment manager has finished downloading the client update catalog file.

System action

Catalog processing continues.

User response

None.

ANR37 88I Started downloading *num packages* string client update packages.

Explanation

The deployment manager started downloading the client update packages to the server.

System action

Server operation continues.

User response

None.

ANR37 89I The client update package was

successfully downloaded from: *URL path*.

Explanation

The deployment manager finished downloading the client update package to the server.

System action

Server operation continues.

User response

None.

ANR37 90E The client update schedule could not be created for node *node name* on server *server name*. The client update package could not be found for platform, *platform name*(*architecture name*), and version *version*.

Explanation

The client update package needed by deploy schedule could not be found. The deploy schedule could not be created.

System action

The schedule is not created. Server operation continues.

User response

Retry client update for the node after the next deploy package refresh is finished.

ANR37 91E Command: Orphan Type discovery is currently running.

Explanation

The orphan discovery operation is already running.

System action

The server does not process the command.

User response

Re-issue the command when orphan discovery is not running.

ANR37 92E Command: Orphan Type discovery or cleaning is not currently running.

Explanation

The orphan discovery or cleaning operation is not running.

System action

The server does not process the command.

User response

Re-issue the command when orphan discovery or cleaning is running.

ANR37 93E Command: Orphan Type clean is currently running.

Explanation

The orphan cleaning operation is already running.

System action

The server does not process the command.

User response

Re-issue the command when orphan cleaning is not running.

ANR37 94W Data files associated with damaged data extents in storage pool *stgpool name* can become inaccessible.

Explanation

When you issue the AUDIT CONTAINER command with the ACTION=MARKDAMAGED parameter, data files with damaged extents are marked. The data associated with the damaged extents can become unusable.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit containers or 'N' to stop the process.

ANR37 95E Data from cloud volume or container *file_name*, which is defined in the connection or storage pool *generic_name*, could not be uploaded.

Explanation

The operation to upload data to the object storage system failed. This issue might be caused by a faulty network connection to the object storage system.

System action

The command fails, but system operation continues.

User response

To resolve the issue, complete the following steps: 1. Check the network connection to the object storage system. 2. Correct any detected issues. 3. Retry the upload operation.

ANR37 97E The server did not process the *Command* because the *parameter* parameter is not valid for the *stgtype* type of storage.

Explanation

A parameter in this command is not valid for storage pools that are used for this type of storage.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command with parameters that are valid for the storage type.

ANR37 98E The server did not process the *Command* command: The *parameter* parameter is preset for storage pools with the COLDDATACACHE storage type.

Explanation

Do not specify this parameter if the STGTYPE=COLDDATACACHE parameter setting is specified for the storage pool.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command without the parameter.

ANR38 00W Storage pool protection was removed from storage pool *stgpool name* on server *this server*. Data from the specified storage pool is no longer copied to storage pool *stgpool name* on server *other server*. During the removal process, some extents might not have been deleted. Total number of extents: *total extents need be deleted*. Number of extents that

were not deleted: *extents failed to delete*. Number of extents that were deleted: *extents deleted*. Elapsed time: *elapsed time*

Explanation

The process of removing storage pool protection has finished with a warning. During the removal process, some extents might not have been deleted.

System action

Server operation continues.

User response

To determine why the warning was issued, review the activity log or the first failure data capture (FFDC) log.

ANR38 01I The removal of storage pool protection from storage pool *stgpool name* on server *this server* is complete. Data from the specified storage pool is no longer copied to storage pool *stgpool name* on server *other server*. Total number of extents: *total chunks need be deleted*. Number of extents that were not deleted: *chunks failed to delete*. Number of

extents that were deleted: *chunks deleted.*
Elapsed time: *elapsed time.*

Explanation

The process of removing storage pool protection is complete, and no further action is required.

System action

Server operation continues.

User response

No action is required.

ANR38 Command: 02I Storage pool protection cannot be removed from storage pool *storage pool* because another process is in progress.

Explanation

Storage pool protection cannot be removed because a process to protect the storage pool, or a process to remove protection, is in progress.

System action

The server does not process the command.

User response

Wait until the protection process or the protection removal process is complete, and then reissue the command.

ANR38 The specified 03I storage pool, *storage pool*, was not found.

Explanation

The storage pool could not be located because an invalid name was entered.

System action

Server operation continues, but the server does not process the command.

User response

To resolve the issue, rerun the command with a valid storage pool name.

ANR38 The specified 04I remote server, *server*, is not defined.

Explanation

The remote server could not be located because an invalid name was entered.

System action

System operation continues, but the server does not process the command.

User response

To resolve the issue, rerun the command with a valid remote server name.

ANR38 Preview of 05I removing protection from storage pool *stgpool name* on server *this server*. The specified storage pool protects data to storage pool *stgpool name* on server *other*

server. Number of extents to be deleted: *extents to be deleted*

Explanation

The preview shows the results of removing protection from the storage pool.

System action

Server operation continues.

User response

No action is required.

ANR38 Removing 06I storage pool protection from storage pool *stgpool name* on server *this server*. The specified storage pool was protecting data to storage pool *stgpool name* on server *other server*. Total number of extents: *extents need be deleted* Number of extents that could not be deleted: *extents failed to delete* Number of extents that were deleted: *extents deleted* Elapsed time: *elapsed time*

Explanation

Detailed information is provided about the process of removing storage pool protection.

System action

Server operation continues.

User response

No action is required.

ANR38 Canceling the 07I preview for removing storage pool protection from storage pool *stgpool name* on server *this server*. The storage pool is protecting data to storage pool *stgpool name* on server *other server*. Total number of extents: *total extents need be deleted* Number of extents that were not deleted: *extents failed to delete* Number of extents that were deleted: *extents deleted* Elapsed time: *elapsed time*

Explanation

The preview for removing storage pool protection is being canceled.

System action

Server operation continues.

User response

No action is required.

ANR38 A process for 08E moving container *Container Name* was started, but

no data was moved.

Explanation

The process for moving the specified container is reported as a failure because no eligible data was detected, and no data was moved.

System action

System operation continues, but the specified process failed.

User response

When you run the MOVE CONTAINER command, ensure that the DEFRAG=NO setting is specified. For example, if the name of the container is BOSTON23, issue the following command: MOVE CONTAINER BOSTON23 DEFRAG=NO

ANR38 09W Data files associated with damaged data extents in storage pool stgpool name will become accessible.

Explanation

When you issue the AUDIT CONTAINER command with the ACTION=UNMARKDAMAGED parameter, data files with damaged extents are unmarked. The data associated with the damaged extents will become available.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to audit containers or 'N' to stop the process.

ANR38 10E During the validation operation, the server could not connect to the cloud service provider. The exception that was thrown during the validation attempt displayed the following message: "exception text".

Explanation

The connection to the cloud service provider failed because the credentials did not resolve. Details of the particular exception are displayed in the message output. The exception that was thrown during the validation attempt displayed the following message, which might not be available in your language.

System action

The command fails.

User response

Verify that the credentials are correct and that the cloud provider is active.

ANR38 11E command name: The replication stgrule command failed because the target replication server server name is not

compatible with this source replication server.

Explanation

In response to a replication stgrule command, the server tried to establish a connection with the target replication server but failed. The target server is at a level that cannot support stgrule replication with this server.

System action

Server operations continue, but the server does not process the command.

User response

Ensure that the replication target server is at a maintenance level that supports stgrule replication with this server.

ANR38 12W The replication operation is delayed because target replication server server name is occupied with replication recovery operations.

Explanation

In response to a replication storage rule command, the source replication server must wait to establish a connection with the target replication server. The target replication server is occupied with

recovery operations for a previously interrupted replication operation.

System action

Server operations continue. The server will process the replication storage rule after recovery operations are completed.

User response

No action is required.

ANR38 13E The server did not process the Command command: Cloud data locking is not enabled on the storage pool.

Explanation

Cloud data locking is not enabled for this storage pool.

System action

System operation continues, but the server does not process the command.

User response

Reissue the command on a storage pool that has cloud data locking enabled.

ANR38 14E The request to the cloud service provider cannot be processed. Cloud data locking is not supported by the vendor_name vendor.

Explanation

A request to the cloud service provider failed because cloud data locking is not supported by the specified vendor. Specify a cloud vendor that supports cloud data locking for the storage pool.

System action

The Server operation continues, but the request is not processed.

User response

Specify a cloud vendor that supports cloud data locking for the storage pool.

ANR38 15E The request to the cloud service provider cannot be processed. Cloud data locking is not supported by bucket *bucket_name*.

Explanation

A request to the cloud service provider failed because cloud data locking is not supported by the specified bucket. Specify a cloud bucket that supports cloud data locking for the storage pool.

System action

The Server operation continues, but the request is not processed.

User response

Specify a cloud bucket that supports cloud data

locking for the storage pool.

ANR38 16W The default retention settings for bucket *bucket_name* are not set or do not match the cloud lock duration settings for the storage pool.

Explanation

The storage pool cloud lock duration does not match the cloud service provider default retention settings.

System action

The Server operation continues.

User response

Update the cloud bucket retention settings to match the storage pool cloud data locking duration.

ANR38 17E The request to the cloud service provider cannot be processed. Cloud data locking is enabled on bucket *bucket_name* but is disabled on the storage pool or not allowed for device class volumes.

Explanation

A request to the cloud service provider failed because cloud data locking is not enabled

on the specified storage pool but is enabled on the bucket being used for that storage pool. Specify a cloud bucket that does not have locking enabled. Device class volumes used for database backup to cloud or retention sets to cloud are not allowed to be written a bucket with cloud data locking enabled.

System action

The Server operation continues, but the request is not processed.

User response

Specify a cloud bucket that supports the storage pool cloud data locking settings. Do not use cloud data lock buckets for database backup to cloud or cloud retention sets.

ANR38 18E Command *name*: Failed because an invalid password expiration period was provided. An OSSM node cannot have a password expiration period greater than *pass_exp* days.

Explanation

The OSSM node registration or update failed because the password expiration period that is provided has exceeded the maximum value for an OSSM node.

System action

The Server operation continues, but the request is not processed.

User response

Specify a password expiration period that is less than the maximum duration allowed for an OSSM node in the *pass_exp* days attribute.

ANR38 19E Command *name*: Failed to rename the node. An OSSM node cannot be renamed.

Explanation

Renaming an OSSM node is not allowed.

System action

The Server operation continues, but the request is not processed.

User response

No action is required.

ANR38 20E Command *name*: Failed to complete LDAP authentication for OSSM nodes.

Explanation

LDAP authentication is not supported for OSSM nodes.

System action

The Server operation continues, but the request is not processed.

User response

No action is required.

ANR38 21E A request to replicate OSSM filesystem data was denied because the target replication server *server name* was not configured to store OSSM filesystem data into a directory container storage pool.

Explanation

You must configure the target replication server to replicate OSSM filesystem data into a directory container storage pool.

System action

System operation continues.

User response

Configure the target replication server to accept OSSM filesystem data.

ANR38 22E A request to the cloud service provider for the *operation_name* operation on the *generic_name* connection or storage pool failed with an internal error.

Explanation

A request to the cloud provider failed because of an internal error.

System action

The activity that generated this error fails.

User response

None.

ANR38 23W The Swift-based cloud type is being deprecated for cloud-container storage pools. Any data that is in a Swift type of cloud-container storage pool continues to be protected and can be restored. Swift type pools do not allow new ingest and are read only. When you define new cloud-container storage pools, do not specify CLOUDTYPE=S WIFT, CLOUDTYPE=V1 SWIFT, or CLOUDTYPE=IB MCLLOUDSWIFT.

Explanation

Use of a Swift-based cloud type will result in a weekly warning message. Specify a cloud type that is not Swift based for new cloud-container storage pools.

System action

Server operations continue.

User response

No action is required, but avoid use of the SWIFT, V1SWIFT, and IBMCLLOUDSWIFT cloud types for new storage pools.

ANR38 24W Replication skipped one or more files for node *node name* file space *file space name* because they were updated after the replication process was started.

Explanation

During replication processing, a client updated one or more files for the specified node and file space.

System action

Replication skips the updated files.

User response

To replicate the updated files, reissue the REPLICATE NODE command.

ANR38 25E Command: Transfer Method *transfer method* is not valid.

Explanation

The transfer method must be one of tcp or fasp on a platform that supports fasp.

System action

The server does not process the command.

User response

Update the PROTECT STGpool parameter for the pool you are trying to protect.

ANR38 26E Command: Transfer Method

transfer method is not valid.

Explanation

The transfer method must be one of tcp, or fasp on a platform that supports fasp.

System action

The server does not process the command.

User response

Update the Replicate Node parameter for the node you are trying to replicate.

ANR38 27E A request to create a container on the *generic_name* connection or storage pool failed, the access pool does not have a vault template.

Explanation

A request to create a volume or container failed because a default vault template was not specified, or the default vault template was not deployed to the specified accessor.

System action

The activity that generated this error fails.

User response

Ensure that the IBM Cloud Object Storage dsNet has a default vault template specified, and ensure that the default vault template is deployed to the access

pool which contains the accessor to which this storage pool points. Then run the command again.

ANR38 28E *The command specified multiple Amazon endpoints in the CLOUDURL parameter.*

Explanation

The command specified a CLOUDURL parameter that listed multiple endpoints for an Amazon object storage system.

System action

The server cannot process the command.

User response

Reissue the command with only one Amazon endpoint specified in the CLOUDURL parameter.

ANR38 29I *The AUDIT CONTAINER process process_id ended for the stgpool_name storage pool: inspected_extents cloud objects inspected and orphaned_extents data extents marked as orphaned.*

Explanation

The orphaned extent identification generated the following information:

- The number of cloud objects inspected
- The number of orphaned data extents

System action

None.

User response

To remove orphaned extents from cloud containers, issue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAGED parameter.

ANR38 30E *The command specified the same endpoint multiple times in the CLOUDURL parameter.*

Explanation

The command contained a CLOUDURL parameter that specified one or more endpoints multiple times.

System action

The server cannot process the command.

User response

Reissue the command with a CLOUDURL parameter that specifies each endpoint only once.

ANR38 31E *FASP session Session identifier aborted due to outstanding FASP read or write timeout threshold exceeding timeout value seconds.*

Explanation

An input/output timeout error condition occurred

during an IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer session between the server and the partner system.

System action

The session with the remote system ended.

User response

Ensure that the specified remote system is operational and is properly configured to run Aspera FASP. For configuration information, go to IBM Knowledge Center and search on "Optimizing data transfer by enabling Aspera FASP technology."

ANR38 32I *Local to Cloud Transfer process process identifier for storage pool storage pool name started.*

Explanation

A process begins to transfer data from local storage to the cloud.

System action

The indicated process is started.

User response

None.

ANR38 33I *Local to Cloud Transfer process process identifier for storage pool storage pool name has completed.*

Explanation

The process of transferring data from local storage to the cloud has completed.

System action

None.

User response

None.

ANR38 34I *Container container name is empty and will not be transferred during process process identifier.*

Explanation

The local-storage-to-cloud transfer process will not move empty containers to the cloud.

System action

The local storage container was skipped during this transfer process.

User response

None.

ANR38 35E *Command: The process of validating an Aspera connection to server targetservername failed.*

Explanation

An error occurred while initializing a process to validate the IBM Aspera Fast Adaptive Secure Protocol (FASP) connection.

System action

The VALIDATE ASPERA command process ended, but server operation continues.

User response

No action is required. However, if you want to establish an Aspera FASP connection to the server, complete the following steps:

1. Go to IBM Knowledge Center and search for "Optimizing data transfer by enabling Aspera FASP technology." Follow the instructions to ensure that your system environment meets the requirements for FASP data transfer.
2. To verify the connection, issue the VALIDATE ASPERA command again.

ANR38 36I Validation of the Aspera FASP connection from *srcserver* to *targetserver*. Amount transferred using FASP: *faspmbs* MB per second. Amount transferred using TCP/IP: *tcpipmbs* MB per second. Latency: *latency* microseconds. Status: *status*. Days until license expires: *expires*.

ANR38 37I Storage pool Tier process *process identifier* for storage pool

storage pool name has completed.

Explanation

The process of tiering data from local storage to a tier storage pool has completed.

System action

None.

User response

None.

ANR38 38I Tiering process *process identifier* for storage rule *stgrule_name* is completed. Data was tiered from storage pool *source_stgpool* to *tgt_stgpool_type* storage pool *target_stgpool*. Tiered Files: *tiered_files*, Tiered Bytes: *tiered_bytes*, Skipped Files: *skipped_files*, Skipped Bytes: *skipped_bytes*, Total Bytes Transferred: *transferred_bytes*, Elapsed time: *elapsed_time*.

Explanation

Tiering processing for the specified storage rule ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all tiering processes ended successfully.

ANR38 39I Tiering process *process identifier* for storage rule *stgrule_name*, subrule *subrule_name*, is completed. Data was tiered from storage pool *source_stgpool* to *tgt_stgpool_type* storage pool *target_stgpool*. Tiered Files: *tiered_files*, Tiered Bytes: *tiered_bytes*, Skipped Files: *skipped_files*, Skipped Bytes: *skipped_bytes*, Total Bytes Transferred: *transferred_bytes*, Elapsed time: *elapsed_time*.

Explanation

Tiering processing for the specified storage subrule ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all tiering processes ended successfully.

ANR38 40W Storage pool *stgpoolname* is

skipped during command processing because this type of storage pool is not supported by the *command* command.

Explanation

The specified command is not supported for the following storage pool types:

- Directory-container storage pools
- Cloud-container storage pools

System action

Command processing continues, but the specified storage pool is skipped.

User response

No action is required.

ANR38 41W The copy retention set *process process ID* for retention storage pool *destination stgpool name* has ended - duration exceeded.

Explanation

During a retention set copying operation for the indicated retention storage pool, a process was terminated because the process duration was exceeded.

System action

System operation continues.

User response

No action is required.

ANR38 42I The copy retention set process *process ID* to copy retention set *retention set ID* to retention storage pool *destination stgpool name* ended.

Explanation

The process has ended.

System action

System operation continues.

User response

No action is required.

ANR38 43I The copy retention set process *process ID* identified *number of files* files in node *node name* and file space *filespace name* for copying to retention storage pool *destination stgpool*.

Explanation

The message shows the number of all eligible files, except group member files, in the specified node and file space that will be copied to the specified retention storage pool during a copy retention set operation.

System action

Server operation continues.

User response

No action is required.

ANR38 44I The copy retention set process *process ID* identified a total of *number of files* files and *number of bytes* bytes to copy to retention storage pool *destination stgpool*.

Explanation

Eligible files for copying are identified.

System action

Eligible files will be copied to the target storage pool.

User response

No action is required.

ANR38 45I The copy retention set process *process ID* identified *number of files* group member files in retention set *retention set ID* for copying to retention storage pool *destination stgpool*.

Explanation

The message shows the number of group members files that will be copied. Group member files are specified based on logical file grouping

protocols on the server. A logical group requires that all group members and the group leader belong to the same node and file space.

System action

Server operation continues.

User response

No action is required.

ANR38 46W Node Replication must be run with **FORCERECONCI LE=YES** parameter after this command is completed.

Explanation

Entries in the database have been cleaned up and node replication must be run with the **FORCERECONCI LE=YES** parameter.

System action

None.

User response

Run **REPLICATE NODE** with **FORCERECONCI LE=YES** parameter.

ANR38 47W **COPY RETENTION SET:** The storage rule *stgrule name* was ended before completion for retention storage pool *destination pool* - duration exceeded.

Explanation

During storage rule processing to copy retention sets to the specified retention storage pool, the storage rule was ended because the duration was exceeded.

System action

System operation continues.

User response

No action is required.

ANR38 48E The process to copy retention set *retention set ID* ended, but the number of copied files *copied file number* plus the number of files that could not be copied *unable copy file number* does not equal the total number of retention set files *retset file count*.

Explanation

The process to copy the indicated retention set was successfully completed, but the number of copied files plus the number of files that could not be copied does not equal the total number of files in the retention set.

System action

The retention set remains in a Copying state so that the copy operation can be retried.

User response

Retry the copy operation.
To retry the operation,

- 1. Issue the RESUME JOB command and specify the job ID. The job ID is the same number as the retention set ID. For example, if the job number is 25, issue the following command: resume job 25.
- 2. The server might restart the storage rule automatically or you can issue the START STGRULE command. For example, if the storage rule is named RETCOPY1, issue the following command: start stgrule retcopy1.

If this issue persists, contact IBM Software Support.

ANR38 49W The copy retention set process process ID stopped because of insufficient space on the retention storage pool or an issue with the access mode for the storage pool.

Explanation

The specified process ended because the server could not copy the data to the retention storage pool for one of the following reasons:

- The retention storage pool does not have enough space to store the data.
- The access mode for the storage pool is

unavailable or read only.

System action

The copy retention set process is terminated.

User response

Make more space available in the retention storage pool. Then, restart the storage rule for copying retention set data.

- 1. Issue the RESUME JOB command and specify the job ID. The job ID is the same number as the retention set ID. For example, if the job number is 25, issue the following command: resume job 25.
- 2. The server might restart the storage rule automatically or you can issue the START STGRULE command. For example, if the storage rule is named RETCOPY1, issue the following command: start stgrule retcopy1.

ANR38 50E command: Node name is required.

Explanation

The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR38 51I Retention set retention set ID was copied. However, some statistics associated with the retention set creation are still being calculated and not yet saved to the retention set.

Explanation

Files from the specified retention set were successfully copied, but some statistics for this retention set are still being calculated and are not yet written to the retention set. When these statistics are calculated, they will be saved to the retention set later. The retention set remains in a Copying state until the storage rule next processes this retention set.

System action

System operation continues.

User response

Retry the copy retention set operation. To retry the operation,

- 1. Issue the RESUME JOB command and specify the job ID. The job ID is the same number as the retention set ID. For example, if the job number is 25, issue the following command: resume job 25.
- 2. The server might restart the storage rule automatically or you can issue the START STGRULE command.

For example, if the storage rule is named RETCOPY1, issue the following command: start stgrule retcopy1.

ANR38 52I Retention set with ID retention set ID for rule retention rule name is copied to storage pool pool name with state retention set state. The following results are available: total number of retention set files: retset file count, number of copied files: copied file number, number of files that failed to copy: copy failed file number.

Explanation

The specified retention set is copied to the retention storage pool with the displayed state and results:

- A Complete state indicates that all files are copied successfully.
- An Incomplete state indicates that the copy operation is ended, but all files are not copied. This may occur if the copy job is terminated.

System action

The specified retention set is set to Copied.

User response

No action is required.

ANR38 53E *Command: Connection connection name is in use by device class or storage pool generic name.*

Explanation

The specified connection is in use.

System action

The server does not process the command.

User response

After verifying that no other device classes or storage pools are using this connection, reissue the command.

ANR38 54W *This command attempts to update the connection name connection. Using this command to update attributes might prevent access to backup data.*

Explanation

If you process the UPDATE CONNECTION command, you might not be able to access backed up data.

System action

You are prompted to indicate whether to continue with the command.

User response

Enter 'Y' to continue or 'N' to cancel the command.

ANR38 55I *The option name file is copied from cloud storage to the download location file location.*

Explanation

To continue processing the server operation, a required device configuration file is downloaded from the specified endpoint in the cloud to a local directory.

System action

The server copies the required configuration file and continues processing the operation.

User response

No action is required.

ANR38 56I *The file name configuration file is copied from local storage to the subdirectory name subdirectory in the cloud.*

Explanation

The server copies the configuration file to the specified subdirectory in the cloud. In case of a disaster, the configuration file can be used to help restore the IBM Storage Protect server.

System action

Server operation continues.

User response

No action is required.

ANR38 57E *The data could not be restored or retrieved from the stgpool name storage pool for the container file container because cloud container storage pools do not support S3 Glacier.*

Explanation

Cloud container storage pools do not support S3 Glacier as a cloud storage class. The cloud retention storage pools support S3 Glacier as a cloud storage class option. You must not move cloud container storage data from S3 to S3 Glacier because you may lose data.

System action

Server operation continues.

User response

To resolve the issue locally, take the following actions:

- Recall the containers in Amazon S3 from the glacier storage class.
- Move the containers in Amazon S3 back to the the standard storage class.
- Issue an audit in the server to reset the container etags: audit container stg="stgpool_name" resetetag=yes
- if there are damages in the pool, additional steps required: audit container stg="stgpool_name

action=scandamaged (or scanall)"

ANR38 58E *action name process process ID is stopped because not enough mount points are available in the target storage pool.*

Explanation

The specified storage rule process cannot continue because of insufficient mount points.

System action

System operation continues.

User response

To resolve the issue, take one or both of the following actions:

- Reduce the maximum number of parallel processes by issuing the UPDATE STGRULE command and specifying a lower value for the MAXPROCESS parameter.
- Allocate more mount points.

ANR38 59I *PING FASP process procnum data transfer to targetserver is complete. Amount transferred: faspbytes. Elapsed time: faspstime seconds. Transfer rate: faspmbps MB per second.*

ANR38 61I One-time retention set, retention set name with ID retention set ID, is copied to storage pool pool name with state retention set state. The following results are available: total number of retention set files: *retset file count*, number of copied files: *copied file number*, number of files that failed to copy: *copy failed file number*.

Explanation

The specified retention set is copied to the retention storage pool with the displayed state and results:

- A Complete state indicates that all files are copied successfully.
- An Incomplete state indicates that the copy operation is ended, but all files are not copied. This may occur if the copy job is terminated.

System action

The specified retention set is set to Copied.

User response

No action is required.

ANR38 62E *Command: The command was not processed because the KEYLOCATION parameter value*

contains more than over number of characters characters.

Explanation

The value that specifies the key ID location exceeds the maximum number of characters.

System action

Server operation continues, but the server does not process the command.

User response

Select a file path and file name for the storage pool key ID that do not exceed the maximum number of characters. Then, reissue the command.

ANR38 63E *Command: The command was not processed because no location was specified for the key ID.*

Explanation

No valid location was specified for the key ID of the cloud-container storage pool.

System action

Server operation continues, but the server does not process the command.

User response

Reissue the command with a valid location for the key ID.

ANR38 64E *The command failed because*

the server cannot open or read the key ID at this location: key location.

Explanation

Either the key location is invalid or the process of opening the file failed.

System action

System operation continues, but the command fails.

User response

Verify that the value of the KEYLOCATION parameter is correct and reissue the command.

ANR38 65E *Command: The specified action type, action type, for subrule rule name is not compatible with the parent storage rule action type, parent action type.*

Explanation

For command processing to succeed, the action type for the subrule and the parent storage rule must be compatible.

System action

System operation continues, but the command fails.

User response

Choose a valid action type and reissue the command. When you define a replication subrule, do not specify

the same action type for the subrule and the parent storage rule. For example, if the parent rule action type is REPLICATE, you must specify the NOREPLICATING action type when you define the subrule. If the parent rule action type is OSSMREPLICATE, you must specify OSSMNOREPLICATING action type when you define the subrule.

ANR38 66E *The command failed because a retention set cannot be created from a retention rule where the REPLPRIMARYS ERVER parameter is set.*

Explanation

The REPLPRIMARYSERVER parameter of a retention rule has been set, preventing retention sets to be created from it.

System action

System operation continues, but the command fails.

User response

Verify that the value of the REPLPRIMARYSERVER parameter is correct and reissue the command.

ANR38 67I *A replication stgrule failed prior to the server restart. Additional processing is*

being done to ensure the correct state of replication is maintained.

Explanation

Replication stgrule processing previously failed and has residual database entries that need to be analyzed for consistency.

System action

System initialization is delayed while this process is performed.

User response

No action is required.

ANR38 68I **Processing for replication stgrule recovery has completed.**

Explanation

Replication stgrule processing to ensure replication consistency has completed.

System action

Inbound replication stgrules will now be processed when they are initiated.

User response

No action is required.

ANR38 69E **Command: The command failed because storage pool storage pool name cannot be specified on the parameter name parameter for the domain type domain domain**

name. The specified storage pool is already referenced by a different type of domain.

Explanation

You cannot have different types of domain references to a single storage pool. A storage pool cannot be referenced by an OSSM domain type and by a non-OSSM domain type at the same time.

System action

Server operation continues, but the command is not processed.

User response

Reissue the command with a valid storage pool name.

ANR38 70E **Command: The command failed because the parameter name parameter cannot be specified for the OSSM domain domain name.**

Explanation

The specified parameter is not supported for the OSSM domain type.

System action

Server operation continues, but the command is not processed.

User response

To resolve the error, reissue the command without the specified parameter.

ANR38 71E **Command: The command failed because an invalid value was specified for the REUSEDELAY parameter. For cloud-container storage pools, a value in the range 1 - 9999 can be specified for the REUSEDELAY parameter.**

Explanation

The REUSEDELAY parameter specifies the number of days that the server retains deduplicated extents that are no longer referenced by a cloud-container storage pool. After the specified time elapses, the deduplicated extents are deleted from the server. Deduplicated extents are required to ensure that files can be recovered from the server database from the point in time of a database restore operation. For this reason, it is useful to set the REUSEDELAY parameter to a value that is equal to or greater than the number of days that you retain database backups. For example, if you retain database backups for 7 days, you can set the value to 7.

System action

The command fails, but server operation continues.

User response

Reissue the command that failed and specify a valid value for the REUSEDELAY parameter.

ANR38 72E **Command: An invalid parameter value was entered. The specified storage pool, storage pool name, is referenced by one or more Open Snap Store Manager (OSSM) domains.**

Explanation

The OSSM domain type is intended to support the integration of the IBM Storage Protect server with clients by using the OSSM interface. Because the specified storage pool is referenced by an OSSM domain, the storage pool is not valid for this command.

System action

Server operation continues.

User response

Select a storage pool that is not referenced by any OSSM domain, and then reissue the command.

ANR38 73E **Command: An invalid parameter value was entered. Node node name**

is an OSSMClient node, which is not supported for this command.

Explanation

The specified command does not support OSSMClient nodes.

System action

Server operation continues.

User response

Select a non-OSSMClient node, and then reissue the command.

ANR38 Command: The 74E command cannot be processed by the server because the specified policy domain, domain name, is an Open Snap Store Manager (OSSM) domain. To run the operation, you must use the OSSM control agent.

Explanation

Domains of type OSSM are intended to support the integration of the IBM Storage Protect server with clients by using the OSSM interface. The server cannot process the specified command for an OSSM domain.

System action

Server operation continues.

User response

Run the operation by using the OSSM control agent.

ANR38 Command: A 75E previous replication storage rule is processing on Target Server, wait the process to complete.

Explanation

The target server is processing a previous replication storage rule. Wait the process to complete before starting a new storage rule

System action

The command is stopped by the server.

User response

Reissue the START STGRULE command after the target server completes its processing of the previous storage rule.

ANR38 Command: An 76E invalid parameter value was entered. Node node name is not an OSSMClient node, which is not supported for this command.

Explanation

The specified command supports OSSMClient nodes only.

System action

Server operation continues.

User response

Select an OSSMClient node, and then reissue the command.

ANR38 Command: 77E Deleting a replication storage rule or subrule with OSSMREPLicate or OSSMNOREPLicate action type is not allowed.

Explanation

The specified command failed because you don't have the required permission.

System action

The command fails, and server operation continues.

User response

Ensure that you have the relevant approvals to delete a storage rule or subrule with an action type of OSSMREPLicate or OSSMNOREPLicate, and then reissue the command.

ANR38 RuleType1 78W process skipped not eligible nodes. Check activity log for Msg1 message for details. Q ACTLOG MSG=Msg2

Explanation

The storage rule process skipped nodes that are not eligible.

System action

The process completes with warnings, there were skipped nodes.

User response

Check activity log for messages, verify affected nodes.

ANR38 command: The 79E connection name appears to have an Amazon S3 virtual-hosted-style URL value for CLOUDURL. Any updates to CLOUDURL or BUCKETNAME requires both the CLOUDURL and BUCKETNAME parameters to be specified.

Explanation

To run the UPDATE CONNECTION command for a connection with an Amazon S3 virtual-hosted-style URL, both the CLOUDURL and BUCKETNAME parameters must be specified.

System action

The server does not process the command.

User response

Reissue the command while specifying all the necessary parameters.

ANR38 80E *command: The connection name connection appears have invalid CLOUDURL and/or BUCKETNAME parameter values specified.*

Explanation

The CLOUDURL and/or BUCKETNAME parameter values are invalid. Check that the CLOUDURL and BUCKETNAME parameter values are correct. CLOUDURL values can be either path-style or virtual-hosted-style URLs. Virtual-hosted-style URLs are currently only supported for Amazon S3 connections.

System action

The server does not process the command.

User response

Reissue the command with valid CLOUDURL and BUCKETNAME parameter values.

ANR38 81E *command: Certificate with label "certificate label" already exists.*

Explanation

A certificate already exists in the server certificate keystore with the specified label.

System action

The server does not process the command.

User response

Reissue the command specifying a label that is not in use.

ANR38 82I *command: Certificate with label "certificate label" is now the default.*

Explanation

The specified certificate has been made the default in the server certificate keystore.

System action

The default is changed.

User response

None.

ANR38 83E *command: Unable to make certificate with label "certificate label" the default.*

Explanation

An error occurred while setting the default certificate.

System action

The default is not changed.

User response

Reissue the command. If the problem persists, use the gsk8capicmd_64 command to change the default.

ANR38 84E *command: Certificate with label "certificate label" does not exist.*

Explanation

A certificate with the specified label does not exist in the server certificate keystore.

System action

The server does not process the command.

User response

Reissue the command specifying a label that is in the server certificate keystore.

ANR38 85E *command: File with name "file name" already exists.*

Explanation

A file intended to contain the exported public key from a new TLS certificate already exists in the server instance directory.

System action

The server does not process the command.

User response

Delete or rename the file and reissue the command. Or, reissue the command specifying a label that is not in use.

ANR39 97E *An error occurred while a client update package was downloading from URL : error description.*

Explanation

One or more packages failed to download from the specified URL. The error message was

reported by the operating system or Java Virtual Machine (JVM). The failed packages are not available for deployment until they are successfully downloaded.

System action

The failed packages are not downloaded.

User response

Investigate the error reported by the operating system or JVM. Examine the first failure data capture (FFDC) log to determine the cause of the operation failure. After fixing the problem wait for the server's next client deployment refresh package update to see if the issue is resolved. If the cause of failure is not found, contact your service representative to resolve the problem.

ANR39 98W *CONVERT STGPOOL is skipping an inconvertible file on volume volume: Node node_name, Type type, File space file_space, File name file_name.*

Explanation

During the convert process, a file is encountered with a type that is not supported by directory-container storage pools.

System action

The file is not converted.

User response

After the storage pool enters the Converted state, issue the MOVE DATA command on the volume to move the inconvertible files to another storage pool.

ANR39 Failure 99E validating database load: expected numRecs records and numBV bit vectors - loaded actNumRecs records and actNumBV bit vectors.

Explanation

The database load process has ended and the number of records, the number of bit vectors, or both the number of records or number of bit vectors loaded, failed to validate.

System action

The LOAD DB process completes with a failure. The server database is not in a usable state.

User response

A number of possible causes exist. To recover from this situation, first retry the database load process. If the error reoccurs, check the activity log or other system logs to determine if there is a hardware or media error. If a hardware or media error exists, correct the error and retry the load process. If a hardware or media error does not exist, it is

likely the dump or unload of the server database has encountered an error resulting in the dump/unload server database image as being unusable or that there is an error in the logic for load db processing. Contact your service representative for assistance.

ANR40 The protect storage pool process for stgpool name on server this server to stgpool name on server other server is complete. Extents protected: extents protected of extents to protect. Extents failed to protect: extents failed to protect. Amount protected: amount protected of amount to protect. Amount failed to protect: amount not protected. Extents deleted: extents deleted of extents to delete. Extents failed to delete: extents failed to delete. Extents moved: extents moved for volume reclamation of extents to move. Extents failed to move: extents not moved for volume reclamation. Amount moved: amount moved

for volume reclamation of amount to move. Amount failed to move: amount not moved for volume reclamation. Elapsed time: elapsed time.

Explanation

The protect storage pool process is complete. The following list describes the information in the message:

- Extents protected: Extents that were successfully copied to the target container-copy storage pool.
- Amount protected: Bytes that were successfully protected by being copied to the target container-copy storage pool.
- Amount failed: Bytes that were not
- Extents deleted: Extents that were deleted from the directory-container storage pool and have been removed from the copy-container storage pool.
- Extents moved: Extents that were successfully recopied to the target container-copy storage pool because a volume was eligible for reclamation.
- Amount moved: Bytes that were successfully recopied to the target container-copy storage pool.
- Amount failed to move: Bytes that were not recopied. See previous messages for further details.
- Elapsed time: How long the process ran.

ANR Messages 04001-06000

ANR40 The preview of protect storage pool stgpool name on server this server to stgpool name on server other server is complete. Extents to be protected: extents to be protected. Amount to be protected: amount to be protected. Extents to be deleted: extents to be deleted. Extents to be moved: extents

to be moved for volume reclamation. Amount to be moved: amount to be moved for volume reclamation.

Explanation

The storage pool protection preview is complete. The following list describes the information in the message:

- Extents to be protected: Extents that need to be protected by being copied to the target

container-copy storage pool.

- Amount to be protected: Bytes that need to be protected by being linked to matching extents on the target server.
- Extents to be deleted: Extents that were deleted from the directory-container storage pool that need to be removed from the copy-container storage pool.
- Extents to be moved: Extents that need to be recopied to the target container-copy storage pool because a volume was eligible for reclamation.
- Amount to be moved: Bytes that need to be recopied to the target container-copy storage pool because a volume was eligible for reclamation.

ANR40 02W The protect storage pool process for *stgpool name* on *this server* to *stgpool name* on *other server* is complete. Some extents might not have been protected. Extents protected: *extents protected of extents to protect*. Extents failed to protect: *extents failed to protect*. Amount protected: *amount protected of amount to protect*. Amount

failed to protect: *amount not protected*. Extents deleted: *extents deleted of extents to delete*. Extents failed to delete: *extents failed to delete*. Extents moved: *extents moved for volume reclamation of extents to move*. Extents failed to move: *extents not moved for volume reclamation*. Amount moved: *amount moved for volume reclamation of amount to move*. Amount failed to move: *amount not moved for volume reclamation*. Elapsed time: *elapsed time*.

Explanation

The protect storage pool process completed but some extents might have been skipped due to conflicting operations. The following list describes the information in the message:

- Extents protected: Extents that were successfully copied to the target container-copy storage pool.
- Amount protected: Bytes that were successfully protected by being copied to the target container-copy storage pool.

- Amount failed: Bytes that were not protected. See previous messages for further details.
- Extents deleted: Extents that were deleted from the directory-container storage pool and have been removed from the copy-container storage pool.
- Extents moved: Extents that were successfully recopied to the target container-copy storage pool because a volume was eligible for reclamation.
- Amount moved: Bytes that were successfully recopied to the target container-copy storage pool.
- Amount failed to move: Bytes that were not recopied. See previous messages for further details.
- Elapsed time: How long the process ran.

User response

Issue the PROTECT STGPOOL command again to ensure that all data extents are scanned and protected.

ANR40 03I Load command: Database load process started.

Explanation

The database load process has started.

System action

The server loads the contents of the database from a file or removable media.

User response

None.

ANR40 04I Load command: Database load process completed.

Explanation

The database load process has ended.

System action

The server completes processing.

User response

None.

ANR40 05E Load command: Database load process terminated due to error (*error indicator*).

Explanation

The database load process has ended prematurely due to an error.

System action

The server ends load processing.

User response

Examine previously issued messages to determine if an error can be corrected, such as a syntax error. If you cannot resolve the error, contact your service representative.

ANR40 06I Command: Volume *volume number* written by process is *volume name*.

Explanation

A sequential data process wrote to the volume named in the series of one or more volumes that were used to store output. The volume's position in the series is indicated by the volume number reported.

System action

The server ends processing.

User response

None.

ANR40 07E *Command: A transaction error was encountered in recording volume usage history.*

Explanation

The command process encounters a database transaction error in recording the names of the volumes used for the process in the server database.

System action

The server ends processing.

User response

Examine previously issued messages to determine if there is an error that can be corrected, such as a syntax error. If you cannot resolve the error, contact your service representative. The volumes used by the process are valid for the corresponding input

process, but are not recorded in sequential volume history lists generated by the server.

ANR40 08W *Load command: Database object object name does not exist.*

Explanation

The database load process attempts to delete a database object, but the object does not exist.

System action

Database processing continues.

User response

None.

ANR40 09E *Load command: Database object object name cannot be deleted because it is in use by another process.*

Explanation

The database load process attempts to delete a database object, but the object is currently being used by another process.

System action

Database processing ends.

User response

Reissue the command. If it fails, contact your service representative.

ANR40 10E *Command: Multifactor authentication*

(MFA) cannot be enabled for administrator administrator name.

Explanation

The administrator is not permitted to use multifactor authentication.

System action

The command fails.

User response

Reissue the command without the MFAREQUIRED parameter setting.

ANR40 12W *Dump command: Database page page number is damaged.*

Explanation

The specified database page is damaged; it will not be dumped.

System action

Processing continues.

User response

None.

ANR40 13I *Audit command process process id completed audit of total number containers; successful number successfully audited containers, failed number failed audited containers.*

Explanation

The AUDIT CONTAINER command has completed processing.

The following information is displayed:

- The total number of containers that were audited.
- The number of successfully audited containers.
- The number of containers that failed to audit.

System action

None.

User response

None.

ANR40 14W *Audit container process process id is canceled.*

Explanation

During processing of an AUDIT CONTAINER command, the process performing the audit was canceled.

System action

The AUDIT CONTAINER command is canceled.

User response

None.

ANR40 15E *Load command: Invalid record format (format code) detected.*

Explanation

During processing of command *load command*, an invalid record type is detected when reading

the dumped information from the dump media.

System action

Processing of the command ends.

User response

Examine the server messages issued prior to this message to determine the source of the error. On MVS or VM, the LOADDB command syntax may be specified by using a ddname or by specifying a device class name. You must use the same method that was used when the database was originally dumped. If you did not, this error message will be displayed. Try loading the database by using the other method of syntax (devclass). If the error cannot be isolated and resolved, contact your service representative.

ANR40 Load command:
16E Invalid header sequence number detected in database dump. Expected expected sequence number; Actual actual sequence number.

Explanation

During processing of command *load command*, an invalid sequence number is detected when reading the dumped information from the dump media.

System action

Processing of the command ends.

User response

Examine previously issued server messages to determine the source of the error. If the error cannot be isolated and resolved, contact your service representative.

ANR40 Load command:
17E Invalid record type record type read from database dump data.

Explanation

The server database load process encounters an invalid record in reading data from the dump media.

System action

The database load process ends.

User response

Examine previously issued server messages to determine the source of the error. If the error cannot be isolated and resolved, contact your service representative.

ANR40 Load command:
18E Load processing failed - insufficient recovery log space.

Explanation

The load process fails due to insufficient recovery log space.

System action

Database load processing ends.

User response

Reinstall the server and specify a larger recovery log and reissue the database load command.

ANR40 Load command:
19E Load processing failed - insufficient database space.

Explanation

The load process fails due to insufficient database space.

System action

Load processing ends.

User response

Reinstall the server and specify a larger database and reissue the database load command.

ANR40 Load command:
20E Batch database insert failed.

Explanation

The database load process fails when it attempts to insert a batch of rows into the database.

System action

Database load processing ends.

User response

Examine the messages issued prior to this one to determine if an error can be corrected. You may wish to reinstall the server with a

new recovery log and database and reissue the load command. If the problem persists, contact your service representative.

ANR40 Dump/load
21E command: Error (error code) occurred during an open operation.

Explanation

An error occurs while attempting an open operation on the dump media for a database dump/load operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the operation failed; correct the problem and restart the process.

ANR40 Dump
22E command: Error (error code) occurred during a write operation.

Explanation

The server database dump process encounters an error while writing to the dump media.

System action

Server processing continues, the dump processing ends.

User response

Refer to the other displayed messages to determine why the operation failed; correct the problem and restart the process.

ANR40 23E Load command: Error (error code) occurred during a read operation.

Explanation

The server database load process encounters an error reading from the dump media.

System action

The database load operation ends.

User response

Refer to the other displayed messages to determine why the operation failed; correct the problem and restart the process.

ANR40 25W The AUDIT DATABASE command process id ended. Command processing is canceled.

Explanation

The AUDIT DATABASE command was canceled during processing.

System action

The AUDIT DATABASE command ended.

User response

Reissue the AUDIT DATABASE command.

ANR40 26I The AUDIT DATABASE command process started (process ID process ID).

Explanation

The AUDIT DATABASE command process started for the process whose ID that is displayed.

System action

The AUDIT DATABASE command process is in progress.

User response

This process may be monitored using the QUERY PROCESS command. If this process needs to be cancelled, issue the CANCEL PROCESS command.

ANR40 27I The AUDIT DATABASE command process process id completed processing total number orphaned data extents.

Explanation

The AUDIT DATABASE command completed.

The following information is displayed:

- The total number of orphaned data extents that are processed

System action

None.

User response

For programming support, contact your service representative.

ANR40 28I A scan for damaged files is in progress. Processed count damaged file(s).

Explanation

If the REPLRECOVERDAMAGED system parameter is set to ON, the system monitors server database tables every 30 minutes to determine whether the number of damaged bitfiles has changed. If the number has changed, the system initiates a scan of server database tables to identify the damaged files for recovery purposes. Depending on the system environment, the scan might take hours or days.

System action

System operation continues during the scan.

User response

No action is required. However, you can cancel the scan by issuing the following command from the server console or the administrative client:

```
set  
replrecoverdamaged  
off
```

ANR40 29I A scan to identify damaged files is in progress. If damaged files are detected, a recovery

process will begin after the scan is completed.

Explanation

A REPLICATE NODE command initiated a process to identify and recover damaged files. The server scans database tables to identify which damaged files are eligible for recovery. Depending on the system environment, the scan might take hours or days. The server issues periodic ANR4024I messages to indicate that the scan is ongoing. When the scan is completed, message ANR3650I will appear on the server console.

System action

Server operation continues during the scan. If the scan identifies files that are eligible for recovery, the recovery process begins.

User response

No action is required.

ANR40 30E The replication process failed because of an inconsistency between extents on the source server and extents on the target server that were written by a PROTECT STGPPOOL process.

Explanation

The REPLICATE NODE or PROTECT STGPOOL process detected that extents that were written to the target server by a PROTECT STGPOOL process are inconsistent and out of sync with the source server. The REPLICATE NODE process will end as FAILURE.

System action

None.

User response

Issue the PROTECT STGPOOL command with the FORCERECONCILE=YES parameter, and verify that the process has completed. Then, issue the command again without the FORCERECONCILE=YES parameter.

ANR40 PROTECT 31I STGPOOL: Reclamation processing started for container-copy storage pool target pool.

Explanation

The PROTECT STGPOOL command started reclamation processing for the specified container-copy storage pool. The reclamation process is intended to move data from underutilized volumes and thus release space.

System action

Processing continues.

User response

None.

ANR40 PROTECT 32W STGPOOL: All data in directory-container storage pool source pool was protected to container-copy storage pool target pool. However, reclamation processing for the container-copy storage pool is incomplete.

Explanation

The PROTECT STGPOOL command protected all data in the specified directory-container storage pool to the specified container-copy storage pool. This ensures that the directory-container storage pool can be repaired if needed. However, reclamation processing for the container-copy storage pool is incomplete because the reclamation process was canceled. The reclamation process is intended to move data from underutilized volumes and thus release space.

System action

The storage pool protection process ends.

User response

If the container-copy storage pool is running out of space or if

this message is issued frequently, consider increasing the maximum run time for the schedule that runs the storage pool protection process. If the container-copy storage pool has sufficient space and this message is issued infrequently, no action is required.

ANR40 Update 33I stgpooldir command process process id completed update of stgpooldir name; successful number successfully updated containers, failed number failed updated containers.

Explanation

The UPDATE STGPOOLDIR command has completed processing.

The following information is displayed:

- The stgpool directory updated.
- The number of successfully updated containers.
- The number of containers that failed to update.

System action

None.

User response

None.

ANR40 Update 34W Stgpooldir process process id is canceled.

Explanation

During processing of an UPDATE STGPOOLDIR command, the process performing the audit was canceled.

System action

The UPDATE STGPOOLDIR process is canceled.

User response

None.

ANR40 The automatic 38W audit process for storage pool STGPOOL NAME cannot be started because the resource manager for data deduplication is not enabled.

Explanation

A data deduplication resource manager can be enabled on the server. The resource manager dynamically adjusts the automatic audit process to minimize its performance impact on other processes. The resource manager must be enabled before the automatic audit process can be started.

System action

System operation continues, but the automatic audit process for the specified storage pool is not started.

User response

To enable the resource manager, ensure that the

SDRESMANEVENTENABLE server option is set to YES. To display current option settings, issue the query option command. To update the server option, issue the SETOPT command: setopt sdresmaneventenable yes

ANR40 39I *Audit command process process id completed audit of total number containers with the following results: successful number containers passed the audit; failed number containers failed the audit; processed_exten ts data extents were processed; damaged_exten s data extents were found damaged; and undamaged_ext ents data extents previously marked as damaged were set to not damaged.*

Explanation

The automatic audit process for containers is completed.

The following information is displayed:

- The number of containers that were audited
- The number of containers that passed the audit

- The number of containers that failed the audit
- The number of data extents that were audited
- The number of damaged data extents
- The number of data extents that were previously marked as damaged and are now set to not damaged

System action

The process is completed.

User response

No action is required.

ANR40 40W *The automatic audit process for containers, process process id, is canceled.*

Explanation

The audit process was canceled.

System action

The process was canceled, but system operation continues.

User response

No action is required.

ANR40 41I *Retention rule retention rule name is defined.*

Explanation

A DEFINE RETRULE command successfully created the retention rule indicated.

System action

System operation continues. However, if an issue occurred on another server component during command processing, other messages might be issued by that server component.

User response

If messages are issued by other server components, review these messages in the activity log to determine the cause.

ANR40 42I *Command: Retention rule retention rule name is deleted.*

Explanation

A DELETE RETRULE command has deleted the retention rule indicated.

System action

System operation continues.

User response

No action is required.

ANR40 43I *Retention Rule retention rule name is updated.*

Explanation

An UPDATE RETRULE command has updated the retention rule indicated.

System action

System operation continues.

User response

No action is required.

ANR40 44E *Command: Retention Rule retention rule name is already defined.*

Explanation

The command indicated has attempted to define a retention rule that already exists.

System action

The server does not process the command.

User response

No action is required.

ANR40 45E *Command: Retention Rule retention rule name is not defined.*

Explanation

The command indicated references a retention rule that does not exist.

System action

The server does not process the command.

User response

No action is required.

ANR40 46I *Retention set with ID retention set ID for rule retention rule name created at start timestamp. The retention set expires at expiration timestamp.*

Explanation

A retention set was created. The message

shows the retention set ID, the name of the retention rule that is used to create the retention set, the time the retention set was created, and the date on which the retention set expires.

System action

System operation continues.

User response

No action is required.

ANR40 Retention set 47I retention set ID deleted.

Explanation

A DELETE RETSET command was used to delete the specified retention set.

System action

The retention set is deleted, and system operation continues.

User response

No action is required.

ANR40 Retention Set 48I retention set ID updated.

Explanation

The retention set was updated by the UPDATE RETSET command.

System action

System operation continues.

User response

No action is required.

ANR40 Command: A 49E retention set is already defined for rule retention rule name.

Explanation

The specified command has attempted to define a retention set that already exists.

System action

The server does not process the command.

User response

No action is required.

ANR40 Command: 50E Retention Set retention set ID is not defined.

Explanation

The command indicated references a retention set that does not exist.

System action

The server does not process the command.

User response

No action is required.

ANR40 Command: 51I Retention rule retention rule name renamed to new retention rule name.

Explanation

The requested retention rule has been renamed to the new name shown.

System action

System operation continues.

User response

No action is required.

ANR40 Command: 52E Retention rule retention rule name is referenced by one or more retention sets.

Explanation

The requested retention rule cannot be deleted because one or more retention sets still refer to it. If any retention sets that were created by the retention rule still exist on the system, you cannot delete the retention rule.

System action

System operation continues.

User response

Wait for any retention sets that still refer to the rule to expire or to delete them, issue the DELETE RETSET command. If the retention sets cannot be deleted, issue the UPDATE RETRULE command with the ACTIVE parameter set to NO to prevent new retention sets from being created by the retention rule.

To delete the retention rule, issue the DELETE RETRULE command or use the Operations Center.

ANR40 The protect 53W storage pool process for storage pool stgpool name on server this server to storage

pool stgpool name on server other server skipped processing number of containers skipped containers.

Explanation

The PROTECT STGPOOL command skipped the specified number of containers, and any extents within those containers were not protected.

System action

No action is required.

User response

The next PROTECT STGPOOL command will attempt to protect any containers that were skipped. The name of each skipped container is provided in the first failure data capture (FFDC) log. The FFDC log's default location is in the home directory for the instance user ID.

ANR40 Command: 54E Retention hold hold name is already defined.

Explanation

The command indicated has attempted to define a retention hold that already exists.

System action

The server does not process the command.

User response

None.

ANR40 Command:
55E Retention hold
hold name is not
defined.

Explanation

The command indicated references a retention hold that does not exist.

System action

The server does not process the command.

User response

None.

ANR40 Command:
56E Retention set
retention set ID
is already held
by retention
hold hold name.

Explanation

An attempt was made to associate a retention hold with a retention set, but the retention set was already held by the retention hold.

System action

The server does not process the command.

User response

None.

ANR40 Command:
57E Retention hold
hold name is not
active.

Explanation

An attempt was made to associate a retention hold with a retention

set or with a retention rule defined with FREQUENCY=ONETIME, but the retention hold is not active and cannot be used.

System action

The server does not process the command.

User response

None.

ANR40 Command:
58E Retention set
retention set ID
is not held by
retention hold
hold name.

Explanation

An attempt was made to remove a retention set from a retention hold, but retention set is not held.

System action

The server does not process the command.

User response

None.

ANR40 Command:
59E Retention set
retention set ID
is subject to one
or more
retention holds
and cannot be
deleted.

Explanation

An attempt was made to delete retention set, but the retention set was held by one or more retention holds that prevent it from being deleted.

System action

The server does not process the command.

User response

None.

ANR40 Retention hold
60I hold name
defined.

Explanation

A DEFINE HOLD command has created the retention hold indicated. However, warning messages might be issued by other server components.

System action

None.

User response

If warning messages were issued, consult the explanations associated with those messages.

ANR40 Command:
61I Retention hold
hold name has
been updated.

Explanation

An UPDATE HOLD command has updated the retention hold indicated.

System action

None.

User response

None.

ANR40 Command:
62I Retention hold
hold name has
been renamed

to new hold
name.

Explanation

The requested retention hold has been renamed to the new name shown.

System action

None.

User response

None.

ANR40 Command:
63I Retention set
retention set ID
has been held
using retention
hold hold name.

Explanation

A retention hold has been placed on the indicated retention set.

System action

None.

User response

None.

ANR40 Command:
64I Retention set
retention set ID
has been
released from
retention hold
hold name.

Explanation

A retention hold has been released from the indicated retention set.

System action

None.

User response

None.

ANR40 Command:
65E Retention hold
hold name is in
use.

Explanation

An attempt was made to deactivate a retention hold, but the hold is still in use.

System action

The server does not process the command.

User response

None.

ANR40 Retention set
66I retention set ID
has been held
using retention
hold hold name.

Explanation

A retention hold has been placed on the indicated retention set.

System action

None.

User response

None.

ANR40 Starting
67I scheduled
retention set
creation job for
retention rule
retention rule
name.

Explanation

A scheduled retention set creation job has started. The name of the retention rule for which the job was started is displayed.

System action

Server operation continues.

User response

No action is required.

ANR40 Scheduled
68I retention set
creation job for
retention rule
retention rule
name completed
successfully.

Explanation

The server has successfully completed the processing of a scheduled retention set creation job.

System action

Server operation continues.

User response

No action is required.

ANR40 Scheduled
69E retention set
creation job for
retention rule
retention rule
name failed.

Explanation

The server has encountered a failure during the processing of a scheduled retention set creation job.

System action

Server operation continues. The scheduled job is ended.

User response

Examine the server messages that were

issued prior to this message to determine the source of the error. To make any corrections to the retention rule, issue the UPDATE RETRULE command.

ANR40 Scheduled
70I retention set
creation job for
retention rule
retention rule
name started
successfully.

Explanation

The server has successfully started the processing of a background process for a scheduled retention set creation job.

System action

Server operation continues.

User response

No action is required.

ANR40 Command:
71E Retention Set
retention set ID
is deleted or
expired.

Explanation

The command indicated references a retention set that was deleted or expired.

System action

The server does not process the command.

User response

No action is required.

ANR40 Scheduled
72E retention set
creation job for

retention rule
retention rule
name has
missed its
scheduled start
up window.

Explanation

The scheduled startup window for this schedule has passed and the schedule has not begun.

System action

Server operation continues. The scheduled retention set creation job is not processed by the server.

User response

No action is required.

ANR40 Retention set
73I retention set ID
includes data
from node node
name, file space
filesystem name.

Explanation

The file space that belongs to the specified node is a member of the retention set and supported types of data from this file space are stored in the retention set.

Membership in a retention set does not imply that data is stored in the retention set for that file space.

Only supported types of data from the file space are stored in the retention set. If the file space contains unsupported data (for example, archival data), that data is not stored in the retention set. If the

only data in the file space is unsupported data, or if the file space is empty, the file space is still a member of the retention set.

System action

System operation continues.

User response

No action is required.

**ANR40 Dump/load
74I command:
Encountered
number of
entries bad
database
entries.**

Explanation

This message is displayed at the end of a server database dump or load command to indicate the number of invalid database entries that have been encountered.

System action

Database dump or load processing ends.

User response

None.

**ANR40 Audit command:
75I Auditing policy
definitions.**

Explanation

This message is displayed during a database audit and indicates that the server policy information (domain, policy set, management classes, and copy groups) are being examined by the database audit process.

System action

Audit processing continues.

User response

None.

**ANR40 Audit command:
76E Invalid client
node count
detected for
policy domain
domain name.**

Explanation

A database audit process finds that the count of nodes recorded for the specified policy domain do not match the actual number of nodes assigned to the domain.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

**ANR40 Audit command:
77I Invalid client
node count
detected for
policy domain
domain name
count will be
corrected.**

Explanation

A database audit process finds that the count of nodes recorded for the specified policy domain do not match the actual number of nodes assigned to the domain. Because FIX=YES has been specified for the command, the node

count will automatically be corrected.

System action

Audit processing continues.

User response

None.

**ANR40 Audit command:
78E Invalid
activation
indicators
encountered for
policy domain
domain name.**

Explanation

A database audit process finds incorrect policy set activation entries for the specified policy domain.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

**ANR40 Audit command:
79I Invalid
activation
indicators
encountered for
policy domain
domain name -
entry will be
corrected.**

Explanation

A database audit process finds incorrect policy set activation entries for the specified policy domain. Because FIX=YES has been specified for the audit command, the entry will be corrected.

System action

Audit processing continues.

User response

None.

**ANR40 Audit command:
80E Invalid grace
period backup
retention value
encountered for
policy domain
domain name.**

Explanation

A database audit process finds an incorrect grace period retention value for the specified policy domain.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

**ANR40 Audit command:
81I Invalid grace
period backup
retention value
encountered for
policy domain
domain name -
default value
will be set.**

Explanation

A database audit process finds an incorrect grace period retention value for the specified policy domain. Because FIX=YES has been specified for the audit command, the default value will be set.

System action

Audit processing continues.

User response

None.

ANR40 82E *Audit command: Invalid grace period archive retention value encountered for policy domain domain name.*

Explanation

A database audit process finds an incorrect grace period retention value for the specified policy domain.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 83I *Audit command: Invalid grace period archive retention value encountered for policy domain domain name - default value will be set.*

Explanation

A database audit process finds an incorrect grace period retention value for the specified policy domain. Because FIX=YES has been specified for the audit command, the default value will be set.

System action

Audit processing continues.

User response

None.

ANR40 84E *Audit command: Invalid administrator update information encountered for policy domain domain name.*

Explanation

A database audit process finds incorrect last updated information for the specified policy domain.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 85I *Audit command: Invalid administrator update information encountered for policy domain domain name - information will be corrected.*

Explanation

A database audit process finds incorrect last updated information for the specified policy domain. Because FIX=YES has been specified for

the command, the information is corrected.

System action

Audit processing continues.

User response

None.

ANR40 86E *Audit command: Invalid node node number found assigned to domain domain name.*

Explanation

A database audit process finds a node number assigned to a policy domain that does not reference a valid client node definition.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 87I *Audit command: Invalid node node number found assigned to domain domain name reference will be deleted.*

Explanation

A database audit process finds a node number assigned to a policy domain that does not reference a valid client node definition. Because FIX=YES has been specified for the audit

command, the reference will be deleted.

System action

Audit processing continues.

User response

None.

ANR40 88E *Audit command: Default management class management class name specified for policy set policy set name in domain domain name does not exist.*

Explanation

A database audit process finds a policy set with a default management class specified that does not exist.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 89I *Audit command: Default management class management class name specified for policy set policy set name in domain domain name does not exist - the reference will be removed.*

Explanation

A database audit process finds a policy set with a default management class specified that does not exist. Because FIX=YES has been specified for the audit command, the reference will be removed from the policy set.

System action

Audit processing continues.

User response

When the audit command completes, examine the policy set specified, and set a new default management class for the set. If the policy set is the ACTIVE policy set, you must activate a new policy set for the domain with a valid default management class.

ANR40 90E Audit command:
Active Policy set for domain *domain name* does not contain a valid default management class - policy will fail for this domain. Correct the ACTIVE policy set.

Explanation

A database audit process finds an active policy set for the specified policy domain that does not have a valid active management class specified.

System action

Audit processing continues.

User response

When the audit command completes, you must activate a new policy set for the domain with a valid default management class.

ANR40 91E Audit command:
Invalid administrator update information encountered for policy set *set name* in policy domain *domain name*.

Explanation

A database audit process finds incorrect last updated information for the specified policy set.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 92I Audit command:
Invalid administrator update information encountered for policy set *set name* in policy domain *domain name* - information will be corrected.

Explanation

A database audit process finds incorrect last updated information for the specified policy set. Because FIX=YES has been specified for the command, the information is corrected.

System action

Audit processing continues.

User response

None.

ANR40 93E Audit command:
A management class identifier is not defined for management class *management class name* in policy set *set name*, domain *domain name*.

Explanation

A database audit process finds incorrect information for the specified management class.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 94E Audit command:
A management class identifier is not defined for management class *management*

class name in policy set *set name*, domain *domain name* - an identifier will be generated for this management class.

Explanation

A database audit process finds incorrect information for the specified management class. The audit process generates an identifier, because FIX=YES has been specified for the audit command.

System action

Audit processing continues.

User response

None.

ANR40 95E Audit command:
An invalid management class identifier (*actual identifier*) was encountered for management class *management class name* in policy set *set name*, domain *domain name* (expected *expected identifier*).

Explanation

A database audit process finds incorrect information for the specified management class.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 Audit command: 96E An invalid management class identifier (*actual identifier*) was encountered for management class *management class name* in policy set *set name*, domain *domain name* (expected *expected identifier*) - the correct identifier will be stored.

Explanation

A database audit process finds incorrect information for the specified management class. The audit process corrects the identifier, because FIX=YES has been specified for the audit command.

System action

Audit processing continues.

User response

None.

ANR40 Audit command: 97E Invalid administrator update information

encountered for management class *management class name* in policy set *set name* in policy domain *domain name*.

Explanation

A database audit process finds incorrect last updated information for the specified management class.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR40 Audit command: 98I Invalid administrator update information encountered for management class *management class name* in policy set *set name* in policy domain *domain name* - information will be corrected.

Explanation

A database audit process finds incorrect last updated information for the specified management class. Because FIX=YES has been specified for the command, the information is corrected.

System action

Audit processing continues.

User response

None.

ANR40 Audit command: 99E Copy group *copy group name* in management class *management class name*, policy set *set name*, domain *domain name* has an invalid name or type.

Explanation

A database audit process encounters a copy group that has an invalid name or copy group type.

System action

Audit processing continues.

User response

If FIX=YES has not been specified for the audit command, reissue the command specifying FIX=YES so that the error can be corrected.

ANR41 Audit command: 00I Attempting to reinsert the copy group as a BACKUP copy group.

Explanation

A database audit process encounters a copy group that has an invalid name or copy group type. The process attempts to reinsert the definition as a backup copy group.

System action

Audit processing continues.

User response

None.

ANR41 Audit command: 01I A backup copy group already exists - the invalid copy group will be deleted.

Explanation

A database audit process encounters a copy group that has an invalid name or copy group type. While attempting to reinsert the copy group as a backup copy group, the process discovers that a backup copy group already exists for the management class. The copy group is deleted.

System action

Audit processing continues.

User response

After the audit command completes, you may examine the server copy groups using the QUERY COPYGROUP command, and correct them with the DEFINE COPYGROUP and UPDATE COPYGROUP commands if desired.

ANR41 Audit command: 02I Attempting to reinsert the copy group as an ARCHIVE copy group.

Explanation

A database audit process encounters a copy group that has an invalid name or copy group type. The process attempts to reinsert the definition as an archive copy group.

System action

Audit processing continues.

User response

None.

ANR41 03I *Audit command:*
An archive copy group already exists - the invalid copy group will be deleted.

Explanation

A database audit process encounters a copy group that has an invalid name or copy group type. While attempting to reinsert the copy group as an archive copy group, the process discovers that a backup copy group already exists for the management class. The copy group is deleted.

System action

Audit processing continues.

User response

After the audit command completes, you may examine the server copy groups using the QUERY COPYGROUP command, and correct them with the DEFINE COPYGROUP and UPDATE COPYGROUP commands, if desired.

ANR41 04E *Audit command:*
An invalid management class identifier (actual identifier) was encountered for a copy group in management class management class name, policy set set name, domain domain name (expected expected identifier).

Explanation

A database audit process finds incorrect information for the specified copy group.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 05E *Audit command:*
An invalid management class identifier (actual identifier) was encountered for a copy group in management class management class name, policy set set name, domain domain name (expected expected identifier) - the correct

identifier will be stored.

Explanation

A database audit process finds incorrect information for the specified copy group. The audit process corrects the identifier, since FIX=YES has been specified for the audit command.

System action

Audit processing continues.

User response

None.

ANR41 06E *Audit command:*
An invalid copy group identifier (actual identifier) was encountered for a copy group in management class management class name, policy set set name, domain domain name (expected expected identifier).

Explanation

A database audit process finds incorrect information for the specified copy group.

System action

Audit processing continues.

User response

For programming support, contact your service representative.

ANR41 07E *Audit command:*
An invalid copy group identifier (actual identifier) was encountered for copy group name copy group name (expected expected identifier).

Explanation

A database audit process finds incorrect information for the specified copy group name.

System action

Audit processing continues.

User response

For programming support, contact your service representative.

ANR41 08E *Audit command:*
Invalid backup copy group attributes encountered for copy group copy group name in management class management class name, policy set set name, domain domain name.

Explanation

A database audit process encounters invalid backup copy group attributes for the specified copy group.

System action

Audit processing continues.

User response

If FIX=YES has not been specified for the audit command, reissue the command specifying FIX=YES so that the inconsistency can be corrected.

ANR41 09I *Audit command: Invalid backup copy group attributes encountered for copy group copy group name in management class management class name, policy set set name, domain domain name - the copy group will be corrected using default attributes.*

Explanation

A database audit process encounters invalid backup copy group attributes for the specified copy group. Because FIX=YES has been specified for the command, the copy group will be corrected using default values for the attributes found in error.

System action

Audit processing continues.

User response

After the audit command completes, examine the

copy group by using the QUERY COPYGROUP command, and correct attributes with the UPDATE COPYGROUP command, if desired.

ANR41 10E *Audit command: Invalid archive copy group attributes encountered for copy group copy group name in management class management class name, policy set set name, domain domain name.*

Explanation

A database audit process encounters invalid archive copy group attributes for the specified copy group.

System action

Audit processing continues.

User response

If FIX=YES has not been specified for the audit command, reissue the command and specify FIX=YES so that the inconsistency can be corrected.

ANR41 11I *Audit command: Invalid archive copy group attributes encountered for copy group copy group name in management class management class name, policy set set name, domain domain name.*

domain name - the copy group will be corrected using default attributes.

Explanation

A database audit process encounters invalid archive copy group attributes for the specified copy group. Because FIX=YES has been specified for the command, the copy group will be corrected using default values for the attributes found in error.

System action

Audit processing continues.

User response

After the audit command completes, examine the copy group by using the QUERY COPYGROUP command, and correct the attributes with the UPDATE COPYGROUP command, if desired.

ANR41 12W *Audit command: Storage pool storage pool name, specified as a destination for copy group copy group name in management class management class name, policy set set name, domain domain name, does not exist.*

Explanation

A database audit process encounters a storage pool specified for the

destination of the specified copy group that is not defined in the server database. If this copy group is used in an active policy set, then backup or archive operations will fail when attempting to put client data in the destination.

System action

Audit processing continues.

User response

After the audit command completes, use the DEFINE STGPPOOL command to define the missing storage pool or the UPDATE COPYGROUP command to update the copy group to refer to an existing storage pool.

ANR41 13E *Audit command: Invalid administrator update information encountered for copy group copy group name in management class management class name, policy set set name, policy domain domain name.*

Explanation

A database audit process finds incorrect last updated information for the specified copy group.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command:
14I Invalid administrator update information encountered for copy group copy group name in management class management class name, policy set set name, policy domain domain name - information will be corrected.

Explanation

A database audit process finds incorrect last updated information for the specified copy group. Because FIX=YES has been specified for the command, the information is corrected.

System action

Audit processing continues.

User response

None.

ANR41 Audit command:
15E Policy domain domain name is referenced, but not formally defined.

Explanation

A database audit process finds a reference to the specified policy domain, but the domain is not

formally defined in the server database.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command:
16I Policy domain domain name is referenced, but not formally defined - a policy domain with default attributes will be defined with this name.

Explanation

A database audit process finds a reference to the specified policy domain, but the domain is not formally defined in the server database. Because FIX=YES has been specified, a new policy domain with this name will be defined by the audit processor.

System action

Audit processing continues.

User response

After the audit command has completed, you can view the attributes for this policy domain using the QUERY DOMAIN command, and update attributes with the UPDATE DOMAIN command, if desired.

ANR41 Audit command:
17E Policy set set name in domain domain name is referenced, but not formally defined.

Explanation

A database audit process finds a reference to the specified policy set, but the set is not formally defined in the server database.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command:
18I Policy set set name in domain domain name is referenced, but not formally defined - a policy set with this name will be created.

Explanation

A database audit process finds a reference to the specified policy set, but the set is not formally defined in the server database. Because FIX=YES has been specified, the audit process will create a new policy set with this name.

System action

Audit processing continues.

User response

After the audit command has completed, you can view the attributes for this policy set by using the QUERY POLICYSET command, and update attributes with the UPDATE POLICYSET command, if desired.

ANR41 Audit command:
19E Management class class name in policy set set name, domain domain name is referenced, but not formally defined.

Explanation

A database audit process finds a reference to the specified management class, but the class is not formally defined in the server database.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command:
20I Management class class name in policy set set name, domain domain name is referenced, but not formally defined - the management class will be created.

Explanation

A database audit process finds a reference to the specified management class, but the class is not formally defined in the server database. Because FIX=YES has been specified for the audit command, the audit process defines a management class in the server with this name.

System action

Audit processing continues.

User response

After the audit command has completed, you can view the attributes for this management class by using the QUERY MGMTCLASS command, and update attributes with the UPDATE MGMTCLASS command, if desired.

ANR41 Command: An 21E operation that was initiated by the MOVE DRMEDIA command is in progress for volume volume name.

Explanation

A subsequent command was issued, and it specifies the same volume. The newly issued command cannot be completed for the specified volume while the MOVE DRMEDIA command is in progress.

System action

If the newly issued command is a MOVE NODEDATA command, the server skips the volume and continues moving node data on other volumes.

User response

Wait until the operation that was initiated by the MOVE DRMEDIA command is completed. Then, reissue the other command.

ANR41 Audit command: 22E The instance count for management class class name does not agree with the actual management class data (number of instances instances).

Explanation

A database audit process finds a reference count for the specified management class that did not match the actual number of instances for this class.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command: 23I The instance count for management class class name

does not agree with the actual management class data (number of instances instances) - the number will be corrected.

Explanation

A database audit process finds a reference count for the specified management class that does not match the actual number of instances for this class. The audit process corrects the count because FIX=YES has been specified for the audit command.

System action

Audit processing continues.

User response

None.

ANR41 Audit command: 24E The instance count for copy group copy group name does not agree with the actual copy group data (number of instances instances).

Explanation

A database audit process finds a reference count for the specified copy group that does not match the actual number of instances for this copy group.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command: 25I The instance count for copy group copy group name does not agree with the actual copy group data (number of instances instances) - the number will be corrected.

Explanation

A database audit process finds a reference count for the specified copy group that does not match the actual number of instances for this copy group. The audit process corrects the count because FIX=YES has been specified for the audit command.

System action

Audit processing continues.

User response

None.

ANR41 Audit command: 26E Policy global attributes cannot be found.

Explanation

A database audit process is not able to locate

the global attributes for policy information in the server database.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command: 27I Policy global attributes cannot be found - attributes will be recreated.

Explanation

A database audit process is not able to locate the global attributes for policy information in the server database. Because FIX=YES has been specified for the audit command, the attributes will be regenerated.

System action

Audit processing continues.

User response

None.

ANR41 Audit command: 28E Policy global high-water marks do not match the identifiers in use.

Explanation

A database audit process finds the attributes used to track policy identifiers are incorrect.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR41 Audit command: 29E Policy global high-water marks do not match the identifiers in use - they will be corrected.

Explanation

A database audit process finds the attributes used to track policy identifiers are incorrect. Because FIX=YES has been specified for the audit command, the attributes will be corrected.

System action

Audit processing continues.

User response

None.

ANR41 Audit Volume 30W updating object information for volume *volume name*: Node *node name*, Type *file type*, File space *filesystem name*, fsId *filesystem id*, File Name *file name*.

Explanation

As the result of an AUDIT VOLUME command that specified FIX=YES for

the volume shown, object information for the specified file will be updated.

System action

The object information is updated.

User response

None.

ANR41 Audit Volume 31W found incorrect object information for volume *volume name*: Node *node name*, Type *file type*, File space *filesystem name*, fsId *filesystem id*, File name *file name*.

Explanation

As the result of an AUDIT VOLUME command that specified FIX=NO for the volume shown, object information for the specified file is found to be in error.

System action

None.

User response

None.

ANR41 Audit volume 32I process ended for volume *volume name*; *file count* files inspected, *file count* damaged files deleted, *file count* damaged files marked as damaged, *file count* files

previously marked as damaged reset to undamaged, file count objects updated.

Explanation

The AUDIT VOLUME command specifying FIX=YES for the volume shown has ended.

The following information is displayed:

- The number of files audited
- The number of inconsistent files deleted
- The number of inconsistent files marked as damaged
- The number of files previously marked as damaged that were reset to undamaged
- The number of updated objects

The number of files marked as damaged includes all files belonging to aggregates that were marked damaged during the audit. Files are marked as damaged in primary storage pools and not deleted when backup copies for the files are known to exist in COPY storage pools.

System action

None.

User response

To recover files that have been marked as damaged on the volume, use the RESTORE STGPPOOL

or RESTORE volume command.

ANR41 33I Audit volume process ended for volume *volume name*; file count files inspected, file count damaged files found and marked as damaged, file count files previously marked as damaged reset to undamaged, file count objects need updating.

Explanation

The AUDIT VOLUME command specifying FIX=NO for the volume shown has ended.

The following information is displayed:

- The number of files audited
- The number of inconsistent files marked as damaged
- The number of files previously marked as damaged that were reset to undamaged
- The number of objects need updating

The number of files marked damaged includes all files belonging to aggregates that were marked damaged during the audit. Inconsistent files are marked as damaged in the database and can be recovered by using the RESTORE STGPOOL or RESTORE VOLUME command if copies of the files reside in

a COPY storage pool. Another AUDIT VOLUME command may be able to access the files and reset the damaged indicator in the database if the audit volume process cannot access the files due to hardware problems (for example, dirty tape heads).

System action

None.

User response

If you suspect that files were inaccessible because of hardware problems such as dirty tape heads, correct the hardware problem and reissue the AUDIT VOLUME FIX=NO command for this volume. To remove damaged file references and update the object information, issue the AUDIT VOLUME command and specify FIX=YES.

ANR41 34E Command: The "parameter" parameter is not valid for cloud connections or storage pools of this cloud type.

Explanation

The command indicated specifies a parameter that is not valid for cloud connections or storage pools of this cloud type.

System action

The server does not process the command.

User response

Reissue the command with parameters appropriate for this cloud type.

ANR41 35E Command: Command could not be completed because storage pool *storage pool name* has one or more cloud containers.

Explanation

The command could not be completed because the storage pool contains one or more cloud containers that use the existing bucket name.

System action

The server does not process the command.

User response

Before reissuing the command, ensure that the command and all of the specified parameters are allowed when cloud containers already exist in the storage pool.

ANR41 36E A create container request to the cloud service provider for the *pool_name* storage pool failed because the bucket or vault this storage pool attempted to use is not accessible with the cloud provider

credentials provided.

Explanation

A create container request failed. The credentials for the cloud service provider did not have the correct permissions for the bucket or vault that this storage pool attempted to use.

System action

The create container request fails.

User response

Ensure that the permissions are correct for the credentials you specified for connecting to the cloud server. As needed, change the settings on the bucket or vault. If you do not have the ability to change the bucket settings, use the UPDATE STGPOOL command with the BUCKETNAME parameter set to a bucket or vault with a different name.

ANR41 37E Container creation failed because the current credentials do not have permission for *disallowed_operation_name* operations on the bucket or vault.

Explanation

The credentials for the cloud service provider do not have permission to do all of the required operations in this storage

pool's bucket or vault.
As a result, the container
was not created.

System action

Container creation was
not allowed.

User response

Check the permissions
for the bucket or
vault and make sure
that the credentials for
this storage pool have
permission to read, write,
list, and delete objects
in this bucket or vault.
If you do not have
the ability to change or
view the permissions, and
you have not already
written data to this
storage pool, you can use
the UPDATE STGPOOL
command with the
BUCKETNAME parameter
to try to use a different
bucket or vault.

ANR41 38E A request to the
cloud service
provider for the
generic_name
connection or
storage pool
failed because
the name of the
bucket or vault
that this storage
pool attempted
to use is not
valid.

Explanation

Bucket and vault
names must comply
with Amazon Simple
Storage Service (S3)
requirements, which are
listed in the Amazon S3
documentation. Bucket
and vault names must
also comply with any
requirements that are

defined by the cloud
service provider.

System action

Server operations
continue, but the request
fails.

User response

To resolve the issue,
complete the following
steps: 1. Review the
Amazon S3 requirements
for bucket and vault
names. 2. Review any
requirements that are
defined by the cloud
service provider for
bucket and vault names.
3. Issue the UPDATE
CONNECTION or UPDATE
STGPOOL command with
a valid value for the
BUCKETNAME parameter.
4. Retry the request that
previously failed.

ANR41 39W The PROTECT
STGPOOL
settings for the
replicated
target storage
pool are invalid.
To resolve the
issue, the
PROTECT
STGPOOL
command needs
to be manually
issued for
storage pool
*source storage
pool name*.

Explanation

A previously issued
REPAIR STGPOOL
command invalidated the
protect setting for the
replicated target storage
pool. As a result, you
cannot use the REPAIR
STGPOOL command to
repair from the replicated
target storage pool until

the PROTECT STGPOOL
command is issued for
the replicated target
storage pool. Any REPAIR
STGPOOL commands to
the local target storage
pool are unaffected.

System action

None.

User response

Issue the PROTECT
STGPOOL command
with a value of
TYPE=REPLSERVER for
the specified storage
pool. By issuing the
command, this will
restore the protect
setting on the source
storage pool.

ANR41 40E The specified
credentials
failed
verification
because they do
not have
permission for
*disallowed_oper
ation_name*
operations on
the bucket or
vault.

Explanation

The credentials for the
cloud service provider do
not have permission to
do all of the required
operations in this bucket
or vault.

System action

None.

User response

Check the permissions
for the bucket or
vault and make sure
that the credentials for
this storage pool have

permission to read, write,
list, and delete objects in
this bucket or vault. If you
do not have the ability
to change or view the
permissions, try a bucket
or vault with a different
name.

ANR41 41E The specified
credentials
failed
verification
because the
name of the
bucket or vault
that was
provided was
not valid for this
cloud service
provider.

Explanation

Credential verification
failed because the name
of the bucket or vault
that was specified is not
valid for this cloud service
provider.

System action

None.

User response

Bucket and vault names
must comply with S3
requirements, which can
be found in the Amazon
S3 documentation online.
Also, check with your
cloud service provider for
any specific restrictions
on bucket or vault
names. Use a bucket
or vault name that
complies with both
the S3 requirements,
and the cloud provider
restrictions.

ANR41 42W The credentials
for the cloud
service provider
were verified,
and there is not

a bucket or vault on the specified cloud service provider with the provided name. If intended for use with object lock, it is necessary to both create this bucket with the proper settings and to then issue a corresponding VALIDATE CLOUD command before using the connection.

Explanation

The verification of the credentials for the cloud service provider succeeded. However, the specified bucket or vault does not yet exist.

System action

Server operation continues.

User response

If these credentials also have permission to create a bucket or vault, it is safe to create a storage pool with these parameters. If not, then this bucket or vault should be created by other means, and these credentials should have read, write, delete, and list access to the bucket or vault. If intended for use with object lock, it is necessary to ensure the bucket exists and is correctly configured before using this connection. If the connection is created

before the bucket is created, then a VALIDATE CLOUD command must be issued after the bucket is created.

ANR41 43E The credentials for the cloud service provider could not be verified because the *missing_param* parameter was not specified.

Explanation

The credentials could not be verified because the cloud type, the URL, the cloud ID, the cloud password, the cloud bucket name, or the key location was not specified. The required parameters vary by cloud type, and the message text identifies the specific missing parameter.

System action

None.

User response

To resolve the issue, take one of the following actions:

- Reissue the command while specifying all of the necessary parameters.
- Specify the storage pool name of an existing cloud storage pool.
- Specify the connection name of an existing cloud connection.

ANR41 44E Command: Cloud-container storage pool *storage pool name* was not found.

Explanation

The specified storage pool is either undefined or is not a cloud-container storage pool.

System action

The server does not process the command.

User response

Reissue the command with a valid cloud-container storage pool name.

ANR41 45E The specified credentials failed verification because they do not have permission for *disallowed_operation_name* operations.

Explanation

The credentials for the cloud service provider do not have permission to do all of the required operations.

System action

None.

User response

Make sure that the credentials provided grant the permission to read, write, and delete both objects and containers from the cloud provider at the provided location.

ANR41 46E The shared access signature (SAS) token value that you entered does not grant

permission for the following server operation: *disallowed_operation_name*.

Explanation

The SAS token might be invalid, expired, or lacking required permissions.

System action

The requested operation is not started.

User response

To resolve the issue, complete the following steps: 1. Ensure that the SAS token is valid and has not expired. 2. Verify that the SAS token grants the required permissions. Permissions are required to read, write to, and delete objects and containers that are associated with the storage account at the specified location. 3. Ensure that the Service, Container, and Object resource types are allowed on the SAS token.

ANR41 47I Retention set with ID *retention set ID* was created in the past.

Explanation

A retention set was created that includes files as they existed in the past. Expiration processing or other deletion activities might have deleted one or more of the files that would have been included in the retention set had the retention set been

created at that time in the past.

System action

System operation continues.

User response

To limit the possibility that one or more files might not be saved to a retention set, consider scheduling inventory expiration, and other activities which delete files from the server, to run after retention set creation activities complete.

ANR41 Command: Node 48E *node name cannot be replicated because it has data in a retention set.*

Explanation

The target replication server does not support retention sets.

System action

The node and its data are not replicated to the target server.

User response

Reissue the command without specifying the node.

Upgrade the target server to a level that supports retention sets.

ANR41 Command: Node 49E *node name cannot be a member of a retention set because it is being replicated*

to a down level server.

Explanation

The node is being replicated to a target server that does not support retention sets.

System action

The node and its data is not added to the retention set.

User response

Reissue the command without specifying the node.

Upgrade the target server to a level that supports retention sets.

ANR41 command: This 50W *command might cause the deletion of replicated backup objects in a RETAINED state from target servers unless the expire inventory process is stopped and disabled on those target servers.*

Explanation

When you issue the REMOVE REPLNODE command, replicated backup objects that are in a RETAINED state might be deleted from the target server according to expiration policies when a client node is removed from replication. This deletion can occur if the replicated backup objects are in a RETAINED state and are not part of

a retention set on the specified target server.

To avoid object deletion, ensure that the expire inventory process is stopped and disabled on the affected target servers. Even if a client node is removed from replication processing temporarily, the expire inventory process must be stopped and disabled on the affected target servers.

System action

The system will run or cancel the command, depending on your response.

User response

To continue REMOVE REPLNODE command processing, enter 'Y'. To cancel REMOVE REPLNODE command processing, enter 'N'.

ANR41 command: The 51E *command cannot be issued for node node name because the specified node is a replica node and the retention rule is a one-time retention rule with a start date and time in the past.*

Explanation

The specified retention rule is a one-time retention rule and the specified node is a target node of a node replication operation. For one-time retention rules, you cannot trigger the

creation of a retention set with a start date and time in the past for a replica node.

System action

Server operations continue, but the command is not processed.

User response

No action is required.

ANR41 Command: 52E *Schedule frequency must be ONETIME when a retention hold is in effect.*

Explanation

A retention rule cannot be configured to place retention holds on retention sets it creates unless its schedule frequency is ONETIME.

System action

None.

User response

Rerun the command without the HOLD= parameter.

ANR41 COPY 53W *COPY RETENTION SET: No eligible retention sets were found when storage rule stgrule name to copy data to retention storage pool destination stgpool was processed.*

Explanation

The specified storage rule cannot copy retention sets to the retention storage pool because no retention sets are eligible for copying.

System action

Storage rule processing ends, and no retention sets are copied.

User response

Ensure that retention sets are eligible for copying to a target storage pool and then restart the storage rule. The server might restart the storage rule automatically or you can issue the START STGRULE command. For example, if the storage rule is named RETCOPY1, issue the following command: start stgrule retcopy1.

**ANR41 COPY
54I RETENTION
SET: Processing
of the storage
rule *stgrule
name* to copy
retention sets to
retention
storage pool
*destination
stgpool name* is
in progress.**

Explanation

The specified storage rule to copy eligible retention sets to the retention storage pool is in progress.

System action

System operation continues.

User response

No action is required.

**ANR41 COPY
55I RETENTION
SET: Processing
of the storage
rule *stgrule
name* has
ended.**

Explanation

The specified storage rule to copy retention sets to retention storage pool was processed.

System action

System operation continues.

User response

No action is required.

**ANR41 COPY
56E RETENTION
SET: Storage
rule *stgrule
name* has failed
to start because
the storage rule
is already
running.**

Explanation

The specified storage rule, which is intended to copy retention sets to retention storage pool, could not be started because the storage rule is already in progress.

System action

System operation continues.

User response

Wait until all processes started by the storage rule complete before

attempting to start the storage rule again.

**ANR41 Job *job id*
57I started.**

Explanation

The job with the indicated job id started copying to tape.

System action

Server operation continues.

User response

No action is required.

**ANR41 Job *job id* is
58I sleeping.**

Explanation

The job with the indicated job id is sleeping and waiting to be started by the associated storage rule. When the storage rule starts, only sleeping jobs are candidates to be restarted.

System action

Server operation continues.

User response

No action is required.

**ANR41 Job *job id*
59I completed.**

Explanation

The job with the indicated job id completed with no error. All candidate files are written to the retention set with no errors.

System action

Server operation continues.

User response

No action is required.

**ANR41 Job *job id*
60E interrupted by
administrator
name.**

Explanation

The job was interrupted for one of the following reasons:

- The job experienced an error for which it could not recover and stopped processing.
- A storage administrator issued an INTERRUPT JOB command which caused processing to halt.

System action

Server operation continues.

User response

Examine the activity log to determine if there are any conditions that require administrator or operation intervention. Use the JOB parameter on the QUERY ACTLOG command to see messages associated only with a specific job. After the conditions are resolved, use the RESUME JOB command to set the state of the interrupted job to the sleeping state. Once the job is in the sleeping state, it is eligible to start again when the storage rule starts. If you want to prevent the job from ever starting again,

issue the TERMINATE JOB command.

**ANR41 Job job id
61E terminated by
administrator
name.**

Explanation

The job terminates for one of the following actions:

- An administrator issues the TERMINATE JOB command.
- The server terminates a running job if the associated retention set expires or is deleted by the DELETE RETSET command.
- The server encounters an unrecoverable condition and terminates the job.

A retention set that is associated with a job that is terminated by the server expiring that retention set or has been deleted by the DELETE RETSET command is deleted and cannot be accessed. A retention set that is associated with a job that is terminated for a reason other than being expired by the server or being deleted with the DELETE RETSET command is incomplete. The files that were successfully copied into that retention set are available to be restored. Such incomplete retention sets are available until they expire or they are deleted with the DELETE RETSET command.

A terminated job cannot be resumed.

System action

Server operation continues.

User response

Examine the activity log to determine if there are any conditions that require administrator or operation intervention. Use the JOB parameter on the QUERY ACTLOG command to see messages associated only with a specific job. To create a complete retention set, resolve any issues that would prevent a new retention rule from running successfully, then define a one-time retention rule with the same parameters that were used in the original retention rule.

**ANR41 Job job id
62I resumed by
administrator
name.**

Explanation

The job was in the interrupted state, and an administrator issued a RESUME JOB command. The job was resumed, which puts it into the sleeping state. A job in the sleeping state is a candidate to run again when the storage rule is active.

System action

Server operation continues.

User response

No action is required.

**ANR41 Command: Data
63W that was not
replicated might**

**be deleted if you
issue this
command.**

Explanation

Data objects that are part of a grouped object data set have not finished replicating. If you continue command processing for the REMOVE REPLNODE command, these data objects will not be replicated and will be removed from the replication records on this server. Then, the deleted data will not be available if you reverse replication roles in the future by making the target server a source replication server. Some common reasons why replication might not have completed are:

- A previous node replication that did not complete and resulted in partially replicated grouped object data.
- Replication of VM backups or Windows system state backups, which are classified as grouped object data sets.

You can continue to process the REMOVE REPLNODE command or cancel command processing while you wait for replication to finish.

System action

The system will run or cancel the command, depending on your response.

User response

To continue REMOVE REPLNODE command

processing, enter 'Y'. To cancel REMOVE REPLNODE command processing, enter 'N'.

**ANR41 Storage rule
64W storage rule
cannot process
job job id
because the job
is in the
interrupted
state.**

Explanation

The storage rule selected the job to process, but the job is in the interrupted state, and cannot be started.

System action

Server operation continues.

User response

Review activity log messages related to the job and correct any problems that led to it being placed in the interrupted state. Issue the RESUME JOB command to place the job in the sleeping state and make it eligible for processing.

**ANR41 command: The
65E command
cannot be
issued for node
node name
because the
specified node
is a replica node
and cannot be
used to make
retention set
copies.**

Explanation

The specified node is a target node of a node replication operation.

For retention set copy operations, you cannot use replica nodes to create copies of retention sets that are stored in retention storage pools.

System action

Server operations continue, but the command is not processed.

User response

No action is required.

ANR41 66E *The Command command failed because the cloud storage class that was specified is not valid for this cloud type.*

Explanation

The value that was specified for the CLOUDSTORAGECLASS parameter is not compatible with the value that was specified for the CLOUDTYPE parameter.

System action

The server does not process the command.

User response

Ensure that an appropriate cloud storage class is used for this cloud type. For information about compatible cloud storage classes and cloud types, go to IBM Knowledge Center and search for "DEFINE STGPOOL (Define a cloud-container storage pool)". Then, reissue the command that previously failed.

ANR41 67W *Command: Retention Set retention set ID Node node Filespace file space is deleted or expired.*

Explanation

The command indicated references a file space of a retention set that was deleted or expired.

System action

The filespaces of a retention set are already deleted, and system operation continues.

User response

No action is required.

ANR41 68E *Command: Node node name is not defined for Retention Set retention set ID.*

Explanation

The command indicated references a node that was not part of a retention set.

System action

The server does not process the command.

User response

No action is required.

ANR41 69E *Command: Node node name file space file space name is not defined for Retention Set retention set ID.*

Explanation

The command indicated references a file space that was not part of a retention set.

System action

The server does not process the command.

User response

No action is required.

ANR41 70E *Command: Node group node group is not defined for Retention Set retention set ID.*

Explanation

The command indicated references a node group that was not part of a retention set.

System action

The server does not process the command.

User response

No action is required.

ANR41 71I *Node node name, file space file space name deleted from retention set retention set ID.*

Explanation

A DELETE RETSET command was used to delete the specified nodes or filespaces from a specified retention set.

System action

The nodes or filespaces of a retention set are

deleted, and system operation continues.

User response

No action is required.

ANR41 72E *command: The command cannot be issued for node node name because the node platform platform name is not enabled for retention set operations.*

Explanation

The command does not process the specified node because the node platform is set to not allow retention set operations.

System action

Server operations continue, but the command is not processed the specified node.

User response

Reissue the command with a valid node.

ANR41 73W *command: One or more Local destination VSS backups were found in file space file space name that belongs to node node name. Local destination VSS backups cannot be included in a retention set.*

Explanation

A Local destination VSS backup cannot be included in a retention set because it is stored on client local shadow volumes. Only metadata objects are sent to the server for a Local destination VSS backup. The retention set cannot control the backup.

System action

Server operations continue. During retention set creation, if the specified file space has only Local destination VSS backups, the file space is not included as a member of the retention set.

User response

If a retention set cannot be created, reissue the command and specify nodes and file spaces that contain TSM or Both destination backups.

ANR41 74E The system did not find a full VSS backup associated with the incremental or differential VSS backup in file space *filespace name* that belongs to node *node name*. This file space is not included as a member of a retention set.

Explanation

The system cannot restore incremental or differential VSS backups without the associated,

full VSS backup. The system does not support including incremental and differential VSS backups in retention sets when the associated, full VSS backup cannot also be included in the retention set.

System action

Server operations continue, but the specified file space is not included as a member of a retention set.

User response

Complete a full VSS backup operation with the BACKUPDESTINATION=TSM or BACKUPDESTINATION=BOTH parameter setting, and then complete an incremental or differential VSS backup. The system will add the file space with an incremental or differential VSS backup to a retention set when it can also include the associated, full VSS backup.

ANR41 75E *command:* The list item value "value" is too long. The maximum length is *maximum length* characters.

Explanation

The length of an item specified for a command parameter that accepts a comma separated lists of items is greater than the maximum length allowed for the parameter. The command cannot be processed as specified.

System action

The server ignores the command.

User response

Verify the command syntax and reissue the command.

ANR41 76E The list item value "value" is too long. The maximum length is *maximum length* characters.

Explanation

The length of an item specified for a command parameter that accepts a comma separated lists of items is greater than the maximum length allowed for the parameter. The command cannot be processed as specified.

System action

The item is not processed.

User response

Reissue the command using a valid list item.

ANR41 77I Job *job id* did not complete.

Explanation

The job with the indicated job id incomplete due to process duration.

System action

Server operation continues.

User response

No action is required.

ANR41 78I Job *job id* cancelled.

Explanation

The job with the indicated job id cancelled.

System action

Server operation continues.

User response

No action is required.

ANR41 79I Job *job id* failed.

Explanation

The job with the indicated job id failed.

System action

Server operation continues.

User response

No action is required.

ANR41 80E The Command failed because the cloud storage class on the *device_class* device class is not valid for database backups to cloud object storage.

Explanation

The device class that was specified has a CLOUDSTORAGECLASS parameter that is not compatible with this operation. Archival cloud storage classes such as GLACIER and DEEPLACIER are not allowed for database

backups to cloud object storage.

System action

The server does not process the command.

User response

Ensure that a device class with an appropriate cloud storage class is used for this command. Either reissue the command while specifying a device class with an appropriate cloud storage class for database backups, or use the UPDATE DEVCLASS command to change the cloud storage class of the device class and then reissue this command.

ANR41 The command 81E was not processed because device class device class was previously specified on the SET DBRECOVERY command. When you specify this device class on the SET DBRECOVERY command, you cannot use the UPDATE DEVCLASS command to update the CLOUDSTORAGE CLASS parameter to cloud storage class

Explanation

When a device class is specified on the SET DBRECOVERY

command, database backup operations cannot use cloud archive storage classes. Therefore, the CLOUDSTORAGECLASS parameter, which specifies a device class, cannot be updated to use cloud archive classes such as GLACIER or DEEPLACIER.

System action

The server does not process the UPDATE DEVCLASS command.

User response

To resolve the issue, complete the following steps:

- 1. Update the cloud storage class of this device class by issuing the SET DBRECOVERY command and specifying a different device class that does not use the restricted cloud storage class.
- 2. Reissue the UPDATE DEVCLASS command.

ANR41 Cloud container 82W container name could not be downloaded because of insufficient disk space in the directory path directory. The calculated amount of free disk space is existing amount of space GB, but the minimum required amount is required amount of space GB.

Explanation

An operation to download a cloud container to the read cache of a cloud-container storage pool fails if the minimum amount of free disk space in directories that are defined to the storage pool does not meet the required threshold.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

No action is required. However, if the error persists, you can increase the amount of disk storage space that is available to the cloud-container storage pool. To increase the amount of space, define additional storage pool directories by using the DEFINE STGPOOLDIRECTORY command.

ANR41 Cloud container 83E container name was not downloaded because the system was unable to determine the amount of free disk space remaining in the directory path directory.

Explanation

An attempt to download a cloud container fails if the amount of free space remaining in the disk directory cannot be determined or if the

amount of free space does not meet the required threshold.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

To help resolve the issue, ensure that the directories that are defined to the cloud-container storage pool are successfully mounted to the server. To verify this, run the QUERY STGPOOLDIR server command and review the output to ensure that all expected directory paths have read/write access.

ANR41 Cloud container 84E container name was not downloaded to directory directory path because the usage limit for the cloud read cache was exceeded. The current usage level is current level%. The limit is limit level%.

Explanation

An operation to download a cloud container fails if the percentage of disk usage for the cloud read cache is equal to or greater than the specified threshold for the storage pool directories that are defined to the cloud-container storage pool.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

To resolve the issue, specify a larger threshold for the maximum amount of space that can be used for read cache data. To do this, increase the value of the CLOUDREADCACHEMAXUSAGE server option. You can specify a percentage in the range 0 - 100.

ANR41 85E Cloud container *container name* could not be downloaded to the *directory path* directory because the percentage of usage of the cloud-container storage pool directories could not be determined.

Explanation

An operation to download a cloud container to a cloud read cache fails if the percentage of disk usage cannot be determined or if the percentage is equal to or greater than the specified threshold.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

To resolve the issue, ensure that the directories that are defined to the cloud-container storage pool are successfully mounted to the server. To verify this, run the QUERY STGPOOLDIR server command and review the output to ensure that all expected directory paths have read/write access.

ANR41 86W An operation to download cloud container *container name* to the *directory path* directory failed because the size of the cloud container object could not be determined.

Explanation

An operation to download a cloud container fails if the size of the cloud container object is unknown. This issue can be caused by an error in the application programming interface (API) call that is used to determine the object size.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

If this error persists, to help identify the issue, run the VALIDATE CLOUD command and review the output. For example, if the name of the storage pool is POOL1, run the following command:

validate cloud
stgpool=pool1

ANR41 87E Cloud container *container name* could not be downloaded to *directory path* directory because the *directory* could not be located.

Explanation

The download operation for a cloud container fails if the download directory cannot be found.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

To resolve the issue, ensure that storage pool directories are defined to the cloud-container storage pool and are successfully mounted to the server. To verify this, run the QUERY STGPOOLDIR server command and review the output to ensure that all expected directory paths have read/write access.

ANR41 88W Cloud container *container name* could not be downloaded to the *directory path* directory because of a mismatch between the object size of the container object in object storage versus the object size

on the file
system.

Explanation

A download operation for a cloud container to the read cache of a cloud-container storage pool fails if the object size of the container object in object storage and the size of the object on the file system do not match. This issue can be caused by an error in the application programming interface (API) call that is used to determine the object size or if insufficient space is available on the cloud cache file system.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

If this error persists, to resolve the issue, complete the following steps:

- Run the VALIDATE CLOUD command and review the output. For example, if the name of the storage pool is POOL1, run the following command: validate cloud stgpool=pool1
- Ensure there is sufficient free disk space in the storage pool directories that are defined to the cloud-container storage pool.

ANR41 89W Cloud container *container name* could not be downloaded to

the *directory path* directory because this directory path is quarantined.

Explanation

An attempt to download a cloud container to the cloud read cache of a cloud-container storage pool fails if the directory path that was selected for the download operation is quarantined by the server. This issue can occur if the download operations for other containers failed for other reasons.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

No action is required. If another directory is available, the cloud container will be downloaded to that directory. The quarantined directory will be released from quarantine within a few minutes.

ANR41 90W **Cloud container *container name* was not downloaded to the *directory path* directory because the directory path was deleted.**

Explanation

An attempt to download a cloud container to the read cache of a cloud-container storage pool fails if the directory

path for the download is deleted before the download occurs.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

If a new directory is available, the cloud container will be downloaded to the new directory. If the issue persists, ensure that storage pool directories are defined to the cloud-container storage pool and that the directories are successfully mounted to the server. To verify this, run the QUERY STGPOOLDIR server command and review the output to ensure that all expected directory paths have read/write access.

ANR41 91W **Cloud container *container name* was not downloaded to the *directory path* directory because the server could not obtain an internal resource lock on the directory.**

Explanation

An attempt to download a cloud container to a read cache of a cloud-container storage pool fails if the server cannot obtain an internal resource lock on the directory.

System action

System operation continues, but the cloud container is not copied to the read cache.

User response

No action is required. The server will retry the download operation.

ANR41 92W **A significant amount of restored data was detected in the last 24 hours for the cloud-container storage pool *pool name*. The CLOUDREADCA CHE=OFF parameter setting is specified for the storage pool. To help improve the performance of restore operations, consider changing the setting to CLOUDREADCA CHE=ON.**

Explanation

Enabling the cloud read cache for a cloud-container storage pool can improve the performance of restore operations if one or more of the following conditions are true:

- The server is connected to the object storage system on a network with high bandwidth. For example, the network bandwidth is 5 Gbps, 10 Gbps, or 40 Gbps.

- The server is connected to the object storage system on a network with high latency. For example, the object storage system might be an off-premises public cloud with 10 milliseconds of round-trip latency.
- You must restore more than 10 GB of data.
- You have an extent workload that is predominantly composed of small files, is stored with a low ratio of data deduplication, or both. For example, you have one of the following types of workload:
 - Backup-archive client, file server type workloads
 - Oracle database workloads

System action

System operation continues.

User response

To improve the performance of restore operations, take one or both of the following actions:

- Update the cloud-container storage pool to enable the cloud read cache. For example, if the storage pool is named POOL1, issue the following command: update stgpool pool1 clouddreadcache=on
- Specify directories to the cloud-container storage pool.

ANR41 93W **IBM Cloud archive rule**

setting for the bucket *bucket name* does not match the archive type setting of cloud storage class in the IBM Storage Protect device class.

Explanation

When you set a device class with cloud storage class of type Archive or Accelerated Archive, you must configure the bucket in IBM Cloud with an archive rule. If the cloud storage class is defined as Archive, the archive rule for the bucket must be defined with TYPE=ARCHIVE setting. If the cloud storage class is defined as Accelerated Archive, the archive rule for the bucket must be defined with TYPE=ACCELERATED ARCHIVE setting. When these archive rule settings for the bucket do not match the settings of device class, the system displays the warning message.

Use IBM Cloud archive rules with retention storage pools. Do not enable archive rules on buckets that are used for other types of pools and data, such as database backup to cloud or cloud container pools.

System action

The system operation continues. Data continues to be written on the IBM Cloud bucket, but the data will not be archived

to the location defined by the device class.

User response

Configure the IBM Cloud bucket setting to match the device class setting that you defined for IBM Storage Protect.

To update the IBM Cloud archive rule setting for a bucket in IBM Cloud, go to Bucket Configuration and click "Advanced Configuration". For more details about how to set archive rules, refer to the IBM Cloud documentation.

ANR41 The bucket 94E specified, *bucket name*, does not exist. IBM Storage Protect cannot create the bucket automatically. Create the bucket by using the cloud provider.

Explanation

IBM Storage Protect does not create a bucket that uses cloud data lock. Buckets that are enabled with cloud data lock can be created and configured by using the cloud provider outside of IBM Storage Protect.

System action

Server operation continues.

User response

The bucket needs to be created on the cloud provider by other means. Please see your cloud

provider documentation on how to create the bucket.

ANR41 TLS certificate 95E "*certificate label*", expired on expiration date and is no longer valid.

Explanation

The VALID_TO date in the TLS certificate has passed, and cannot be used to establish new sessions with the server.

System action

The session is rejected.

User response

Obtain a new certificate and set it as the default certificate in the server certificate key store, cert.kdb. If using self-signed certificates, follow the troubleshooting instructions in the Problem Determination Guide to generate a new self-signed certificate and to distribute it to clients and other servers that communicate with the server.

ANR41 TLS certificate 96W "*certificate label*", will expire on expiration date.

Explanation

The TLS certificate will expire soon. Once the expiration date passes, clients and other servers will no longer be able to connect to the server.

System action

Server operation continues.

User response

Develop a plan to obtain a new certificate and to set it as the default certificate in the server certificate key store, cert.kdb. If using self-signed certificates, follow the troubleshooting instructions in the Problem Determination Guide to generate a new self-signed certificate and to distribute it to clients and other servers that communicate with the server.

ANR41 TLS certificate 97E "*certificate label*", will not be valid until expiration date

Explanation

The VALID_FROM date in the TLS certificate has not occurred. The certificate cannot be used to establish new sessions with the server until the VALID_FROM date has passed.

System action

The session is rejected.

User response

Obtain a new certificate with a valid VALID_FROM date and set it as the default certificate in the server certificate key store, cert.kdb. If using self-signed certificates, follow the troubleshooting instructions in the Problem Determination

Guide to generate a new self-signed certificate and to distribute it to clients and other servers that communicate with the server.

ANR42 00I *The password for password type name is now sensitivity type.*

Explanation

The password for the specified node or administrator has changed to be case-sensitive or case-insensitive.

By default, case-sensitivity is determined by a node or administrator's session security setting. Passwords are case-insensitive when session security is transitional, and case-sensitive when session security is strict. Session security can change to strict when a node or administrator first signs in to a server, and the password will change to be case-sensitive at the same time. When a password changes from case-insensitive to case-sensitive, it will use the case specified when the node or administrator signs in. Conversely, if an UPDATE NODE or UPDATE ADMIN command is issued to change a node or administrator's session security state to transitional, the server will convert the password to upper case, and will store it as case-insensitive.

System action

Server operation continues.

User response

None.

ANR42 45I *Command: One or more retention rules or retention sets use pool name as a destination storage pool.*

Explanation

The DELETE STGPOOL command attempted to delete a storage pool that is defined as a destination for one or more retention rules or retention sets.

System action

The server does not process the command.

User response

If necessary, issue the UPDATE RETRULE command to update the retention rule. Use the DESTINATION parameter to remove the reference to the storage pool to be deleted. Repeat for all retention rules that reference the storage pool to be deleted. If any retention sets use the storage pool as a destination, then delete the retention sets or wait for the retention sets to expire. Reissue the command.

ANR42 46I *Retention set retention set ID for retention rule retention rule name was created without an expiration*

date. The retention set's creation date and time are start timestamp.

Explanation

A retention set with an unlimited retention period was created. The message shows the retention set ID, the name of the retention rule that is used to create the retention set, and the time the retention set was created.

System action

System operation continues.

User response

No action is required.

ANR42 47I *A one-time retention set retention set name with ID retention set ID was created without an expiration date. The retention set's creation date and time are start timestamp.*

Explanation

A retention set with an unlimited retention period was created. The message shows the retention set ID, the name specified by the administrator who created the retention set, and the creation time of the retention set.

System action

Server operation continues.

None.

User response

No action is required.

ANR42 48E *Audit command: Missing or incorrect information for storage volume volume name.*

Explanation

A database audit process finds a data storage volume for which information is missing or incorrect.

System action

Audit processing continues.

User response

Reissue the audit command with FIX=YES so that the information can be created or corrected.

ANR42 49E *Audit command: Missing or incorrect information for storage volume volume name - information will be created or corrected.*

Explanation

A database audit process finds a data storage volume for which information is missing or incorrect. Since FIX=YES has been specified for the audit command,

the information will be created or corrected.

System action

Audit processing continues.

User response

None.

ANR42 50E *Audit command: Extraneous reference found.*

Explanation

A database audit process finds a reference to a nonexistent entity such as a storage pool or volume.

System action

Audit processing continues.

User response

Reissue the audit command with FIX=YES so that the non-existent entity is recreated, if possible. If recreation is not possible, the extraneous reference is deleted.

ANR42 51E *Audit command: Extraneous reference found - information will be recreated or deleted.*

Explanation

A database audit process finds a reference to a nonexistent entity such as a storage pool or volume. Since FIX=YES has been specified for the audit command, the nonexistent entity will be recreated, if

possible. If recreation is not possible, the extraneous information will be deleted.

System action

Audit processing continues.

User response

None.

ANR42 52E *Command: Updates to an active retention rule are not allowed.*

Explanation

An attempt was made to update an active, one-time retention rule. Such retention rules are read-only, and cannot be updated.

System action

The server does not process the command.

User response

None.

ANR42 53I *Starting retention set creation job for one-time retention set retention set name.*

Explanation

The server starts running a one-time retention set creation job. The name of the retention set is displayed.

System action

Server operation continues.

User response

No action is required.

ANR42 54I *Retention set creation job for one-time retention set retention set name completed successfully.*

Explanation

The server has successfully completed the processing of a one-time retention set creation job.

System action

Server operation continues.

User response

No action is required.

ANR42 55I *Retention set creation job for one-time retention set retention set name started successfully.*

Explanation

The server has successfully started the processing of a background process for a one-time retention set creation job.

System action

Server operation continues.

User response

No action is required.

ANR42 56E *Retention set creation job for one-time retention set*

retention set name failed.

Explanation

The server has encountered a failure during the processing of a one-time retention set creation job.

System action

Server operation continues, but the job is ended.

User response

Examine the server messages that were issued prior to this message to determine the source of the error. Correct the problems that led to the failure and try to create the retention set again.

ANR42 57I *One-time retention set, retention set name with id retention set ID, created at start timestamp. The retention set expires at expiration timestamp.*

Explanation

A retention set was created. The message shows the retention set ID, the name specified by the administrator who created the retention set, and the creation time and expiration date of the retention set.

System action

Server operation continues.

None.

User response

No action is required.

ANR42 58I For output from this process *process ID*, see the server console.

Explanation

A significant number of containers will be audited when you issue the command. Any output for additional processes related to the command will appear only in the server console.

System action

None.

User response

None.

ANR42 59I Retention rule member *pattern* deleted from retention rule *retention rule*.

Explanation

A member was removed from a retention rule because it specified the fully-qualified name of a node or file space that was deleted.

System action

The member is removed from the retention rule.

User response

No action is required.

ANR42 60I Retention rule member *pattern* in retention rule *retention rule* renamed to *pattern*.

Explanation

A member in a retention rule was renamed because it specified the fully-qualified name of a node or file space that was renamed.

System action

The retention rule member is renamed.

User response

No action is required.

ANR42 61E Retention rule frequency cannot be changed from repeating to one-time, or from one-time to repeating.

Explanation

An UPDATE RETRULE command was issued that attempted to change a repeating retention rule schedule to one-time, or a one-time retention rule schedule to repeating. The operation is not allowed.

System action

The retention rule is not changed.

User response

Update the retention rule, specifying ACTIVE=NO, to prevent a repeating rule from running. Alternatively, define a new retention rule with FREQUENCY=ONETIME to create a rule that runs only one time.

ANR42 62E Scheduling parameters for a one-time

retention rule that has already run cannot be changed.

Explanation

An UPDATE RETRULE command was issued that attempted to change scheduling parameters for a one-time retention rule schedule that has already run.

System action

The retention rule is not changed.

User response

Define a new retention rule with FREQUENCY=ONETIME to create a rule that runs at the required time.

ANR42 64I The scheduled start time for retention rule *retention rule name* has been changed to *date time* because the specified start time is in the past or falls on a date on which the rule has already run.

Explanation

A DEFINE RETRULE or UPDATE RETRULE command was issued with scheduling parameters that would have resulted in the repeating rule running at an invalid time. Repeating retention rules are not allowed to run at a point in time in the past, nor may they run more than one time per day.

System action

The retention rule is defined or changed using the next valid start time.

User response

None.

ANR42 65I Minimum number of uppercase characters in password set to *min char*.

Explanation

The minimum number of uppercase characters required for the password of an administrator is indicated with the SET MINPWCHARUPPERCASE command.

System action

None.

User response

None.

ANR42 66I Minimum number of lower characters in password set to *min char*.

Explanation

The minimum number of lower characters required for the password of an administrator is indicated with the SET MINPWCHARLOWERCASE command.

System action

None.

User response

None.

ANR42 67I Minimum number of numeric characters in password set to *min char*.

Explanation

The minimum number of numeric characters required for the password of an administrator is indicated with the SET MINPWCHARNUMERIC command.

System action

None.

User response

None.

ANR42 68I Minimum number of special characters in password set to *min char*.

Explanation

The minimum number of special characters required for the password of an administrator is indicated with the SET MINPWCHARSPECIAL command.

System action

None.

User response

None.

ANR42 69E *Command: The sum of the values specified in the minimum complex password character settings is min pw char sum*

and exceeds the maximum password length of *max pw length*.

Explanation

A SET MINPWCHARALPHABETIC, SET MINPWCHARNUMERIC, or SET MINPWCHARSPECIAL command has been entered that specifies a value that causes the maximum password length for administrators with MFA enabled to be less than the sum of complex password minimum character settings.

System action

None.

User response

Reissue the command with a valid value to use MFA with administrators.

ANR42 71I Minimum number of alphabetic characters in password set to *min char*.

Explanation

The minimum number of alphabetic characters required for the password of an administrator is indicated with the SET MINPWCHARALPHABETIC command.

System action

None.

User response

None.

ANR42 72E *Command: The sum of the values specified in the minimum complex password character settings is min pw char sum and exceeds the maximum password length of max pw length.*

Explanation

A SET MINPWCHARALPHABETIC, SET MINPWCHARUPPERCASE, SET MINPWCHARLOWERCASE, SET MINPWCHARNUMERIC, or SET MINPWCHARSPECIAL command has been entered that specifies a value that causes the maximum password length for administrators with MFA enabled to be less than the sum of complex password minimum character settings.

System action

None.

User response

Reissue the command with a valid value to use MFA with administrators.

ANR42 74W *Command: The sum of the values specified in the minimum complex password character*

settings is min pw char sum and exceeds the minimum password length of min pw length.

Explanation

A SET MINPWLENGTH, SET MINPWCHARALPHABETIC, SET MINPWCHARUPPERCASE, SET MINPWCHARLOWERCASE, SET MINPWCHARNUMERIC, or SET MINPWCHARSPECIAL command has been entered that specifies a value that causes the minimum password length to be less than the sum of the complex password minimum character settings.

System action

None.

User response

None.

ANR42 75W *Command: The sum of the values specified in the minimum complex password character settings is min pw char sum and exceeds the minimum password length of min pw length.*

Explanation

A SET MINPWLENGTH, SET MINPWCHARALPHABETIC

C, SET MINPWCHARNUMERIC, or SET MINPWCHARSPECIAL command has been entered that specifies a value that causes the minimum password length to be less than the sum of the complex password minimum character settings.

System action

None.

User response

None.

ANR42 Administrative user ID *admininstrator name* could not be defined with OWNER access to the node *node name*.

Explanation

The specified password does not meet the minimum complex password requirements for an administrator. The node is registered successfully but the administrator could not be created with the OWNER access to the client node.

System action

None.

User response

Follow these steps to create an administrator with the OWNER access to the client node: 1. Issue the REGISTER ADMIN command to create an administrator. 2. Issue the GRANT

AUTHORITY command to grant OWNER authority to the administrator created in Step 1.

ANR42 Administrative user ID *admininstrator name* could not be updated for OWNER access to node *node name* because the password could not be updated.

Explanation

An existing administrator with the specified name was not granted OWNER access to the client node because the administrator's authentication method was changed to local and the password was invalid. This administrator is updated for accessing the client node from an interactive interface.

System action

None.

User response

Update the administrative user ID password by issuing the UPDATE ADMIN command and then grant authority to the administrative user ID by issuing the GRANT AUTHORITY command.

ANR42 Password reuse limit set to reuse limit.

Explanation

The most recent number of passwords unavailable to be used for the password of an administrator is

indicated with the SET PWREUSELIMIT command.

System action

None.

User response

None.

ANR42 A reclamation operation was started on copy storage pool volumes that are offsite. This operation reclaims data by using a cloud-container storage pool which is based in the public cloud and might result in data movement charges from your cloud storage provider.

Explanation

Because the operation moves data from a public cloud location to an on-premises location, additional charges might apply.

System action

Server operation continues.

User response

To help minimize data movement charges, you can disable reclamation for offsite volumes on the copy storage pool by issuing the UPDATE STGPOOL command and specifying

OFFSITERECLAIMLIMIT =0.

ANR42 Storage rules of type TIERBYSTATE or TIERBYAGE that have a cloud-container storage pool based in the public cloud specified as a target cannot share source pools with storage rules of type COPY.

Explanation

When you define storage rules, you cannot specify the same source storage pool for a storage rule with an action type of COPY and a storage rule with an action type of TIERBYAGE or TIERBYSTATE. Using a common source storage pool for both copy storage rules and tiering storage rules might result in data movement charges from your cloud storage provider during reclamation processing.

System action

The storage rule is not defined.

User response

Define the storage rule using a cloud-container storage pool which is not based in the public cloud, or which is not already the source of a COPY type storage rule.

ANR42 Expiration thread already processing - unable to begin

another
expiration
process.

Explanation

The expiration thread is already processing. The processing expiration thread is either an EXPIRE INVENTORY command or is the automatic background expiration process. In either case, another expiration process cannot be started until the current expiration process completes or is canceled.

System action

Current expiration process continues.

User response

Use the QUERY PROCESS command to determine the status of the current expiration process.

ANR42 command:
99I Internal extent repair process is currently running. Audit command can not begin.

Explanation

The internal extent repair process is currently running. The audit command will not be able to begin until it is idle. This will prevent the audit command from reporting extents that are currently being repaired.

System action

Server operation continues.

User response

The internal extent repair process will report ANR1758I when it becomes idle. Re-run the audit command at this time.

ANR43 A local repair 00W process is already running - unable to start EXPIRE INVENTORY processing.

Explanation

A local repair process is already running. Inventory expiration cannot start until the current local repair process completes or is canceled.

System action

Current expiration process stops.

User response

Start inventory expiration after the local repair completes. Use the QUERY PROCESS command to determine the status of the current local repair process.

ANR43 A local repair 01W process is already running - unable to start DELETE FILESPACE processing.

Explanation

A local repair process is already running. The DELETE FILESPACE command cannot start until the current local repair process completes or is canceled.

System action

The DELETE FILESPACE command stops.

User response

Start the DELETE FILESPACE command after the local repair finished. Use the QUERY PROCESS command to determine the status of the current local repair process.

ANR43 Command: 02W EXPIRE INVENTORY or a DELETE FILESPACE command is processing - unable to start local repair processing.

Explanation

If an EXPIRE INVENTORY or a DELETE FILESPACE command is currently running, local protect does not start..

System action

The local repair command does not start.

User response

Run REPAIR STGPOOL when no EXPIRE INVENTORY nor DELETE FILESPACE command is running. Use the QUERY PROCESS command to determine the status of currently running expiration and filespace deletion processes.

ANR43 command: The 03E command was not processed because an operation to repair object

versions is
already running.

Explanation

You cannot run two instances of the REPAIR OBJECTVERSIONS command simultaneously.

System action

System operations continue, but the server does not process the command.

User response

Wait for the operation to repair object versions to finish, or cancel the operation. Then, reissue the REPAIR OBJECTVERSIONS command.

ANR43 Command: 18E Detected an extent for node node name and file space filespace that is unresolved from a replication stgrule.

Explanation

The specified command failed for a node because the server has not received the data for all extents from a replication stgrule.

System action

System operation continues, but the command fails.

User response

Run replication stgrule from the source

server again to ensure replication is complete.

ANR43 22E *Audit command: Management class **class name** in policy set **set name**, domain **domain name** does not have a valid space management technique defined.*

Explanation

A database audit process finds a management class that does not have a valid value specified.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR43 23E *Audit command: Management class **class name** in policy set **set name**, domain **domain name** does not have a valid space management technique defined - the default value will be set.*

Explanation

A database audit process finds a management class that does not have a valid value specified. Because FIX=YES was specified for the AUDITDB operation, the default space management technique value will be

set for the management class specified.

System action

Audit processing continues.

User response

Refer to the DEFINE MGMTCLASS command in IBM Knowledge Center for valid values.

ANR43 24E *Audit command: Management class **class name** in policy set **set name**, domain **domain name** does not have a valid AUTOMIGNONUSE value specified.*

Explanation

A database audit process finds a management class that does not have a valid value specified.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR43 25E *Audit command: Management class **class name** in policy set **set name**, domain **domain name** does not have a valid AUTOMIGNONUSE value defined - the default value will be set.*

Explanation

A database audit process finds a management class that does not have a valid value specified. Because FIX=YES was specified for the AUDITDB operation, the default AUTOMIGNONUSE value will be set for the management class specified.

System action

Audit processing continues.

User response

Refer to the DEFINE MGMTCLASS command in IBM Knowledge Center for valid values.

ANR43 26E *Audit command: Management class **class name** in policy set **set name**, domain **domain name** does not have a valid MIGQUIRESBKUP value specified.*

Explanation

A database audit process finds a management class that does not have a valid value specified.

System action

Audit processing continues.

User response

Reissue the audit command and specify FIX=YES so that the error can be corrected.

ANR43 27E *Audit command: Management*

*class **class name** in policy set **set name**, domain **domain name** does not have a valid MIGQUIRESBKUP value defined - the default value will be set.*

Explanation

A database audit process finds a management class that does not have a valid value specified. Because FIX=YES was specified for the AUDITDB operation, the default MIGQUIRESBKUP value will be set for the management class specified.

System action

Audit processing continues.

User response

Refer to the DEFINE MGMTCLASS command in IBM Knowledge Center for valid values.

ANR43 28W *Audit command: Storage pool **storage pool name**, specified as a space management destination for management class **management class name**, policy set **set name**, domain **domain name**, does not exist.*

Explanation

A database audit process encounters a storage

pool specified for the space management destination of the specified management class that is not defined in the server database. If this management class is used in an active policy set, then migration operations will fail when attempting to put client data in the destination.

System action

Audit processing continues.

User response

After the audit command completes, use the DEFINE STGPPOOL command to define the missing storage pool or the UPDATE MGMTCLASS command to update the management class to refer to an existing storage pool.

ANR43 29W *Command: Node*
node_name is decommissioned and cannot be included in a retention set.

Explanation

The specified client node is decommissioned. A decommissioned node cannot be a member of a retention set because the node was removed from the production environment.

System action

Server operation continues.

User response

None.

ANR43 30W *Command: File*
space
file_space_name
, which belongs to node
node_name is decommissioned and cannot be included in a retention set.

Explanation

The specified file space is decommissioned. A decommissioned file space cannot be a member of a retention set because the file space was removed from the production environment.

System action

Server operation continues.

User response

None.

ANR43 31E *command*
process terminated, no matching device classes.

Explanation

The server did not find any device class names matching the specifications entered in the RECONCILE VOLUMES command.

System action

Server operation continues.

User response

Use the QUERY DEVCLASS command to determine which device classes are defined on the server and reissue the

RECONCILE VOLUMES command.

ANR43 32W *This command*
will compare all volumes used by the specified device class(es) with the actual data stored on the associated server for those volumes and will report any discrepancies; the data will be inaccessible to users until the operation completes.

Explanation

During the execution of a RECONCILE VOLUMES command, any data a volume named would be unavailable to users.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to reconcile the volumes or 'N' to stop the process.

ANR43 33W *This command*
will discard any references to volumes used by the specified device class(es) that are missing from the associated server, thereby rendering the data unrecoverable; the valid volumes will be inaccessible to users until the

operation completes.

Explanation

During the execution of a RECONCILE VOLUMES command, any data on a volume being reconciled would be unavailable to users. After the command has ended, any inconsistent volumes found will be discarded.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to reconcile the volumes or 'N' to stop the process.

ANR43 34I *command*
(Repair) process started, process ID process ID.

Explanation

As the result of a RECONCILE VOLUMES command that specified FIX=YES, the process whose ID is displayed has begun reconciling the volumes associated with the given device class.

System action

The volumes are reconciled and invalid volumes are displayed.

User response

None.

ANR43 35I *command*
(Inspect Only) process started, process ID process ID.

Explanation

As the result of a RECONCILE VOLUMES command that specified FIX=NO, the process whose ID is displayed has begun reconciling the volumes associated with the given device class.

System action

The volumes are reconciled and inconsistent volumes are displayed.

User response

None.

ANR43 command 36W process ended, process ID process ID.

Explanation

The RECONCILE VOLUMES command for the specified device class has ended.

System action

None.

User response

For complete details on the results of the RECONCILE VOLUMES command, examine the previous messages.

ANR43 command 37W process terminated - process canceled.

Explanation

During processing of a RECONCILE VOLUMES command, the process performing the reconcile was canceled.

System action

The RECONCILE VOLUMES command is ended.

User response

None.

ANR43 command 38W process terminated - sufficient recovery log space is not available.

Explanation

During processing of a RECONCILE VOLUMES command, the source server does not have sufficient recovery log space to continue.

System action

The RECONCILE VOLUMES command is ended.

User response

If necessary, make more recovery log space available to the source server.

ANR43 command 39W process terminated - sufficient database space is not available.

Explanation

During processing of a RECONCILE VOLUMES command, the source server does not have sufficient database space to continue.

System action

The RECONCILE VOLUMES command is ended.

User response

If necessary, make more database space available to the source server.

ANR43 command 41W process terminated - sufficient memory is not available.

Explanation

During processing of a RECONCILE VOLUMES command, the source server does not have enough memory available to complete the command.

System action

The RECONCILE VOLUMES command is ended.

User response

If necessary make more memory available to the source server.

ANR43 command 42W process terminated - lock conflict detected.

Explanation

During processing of a RECONCILE VOLUMES command, the source server cannot obtain a required lock.

System action

The RECONCILE VOLUMES command is ended.

User response

Reissue the RECONCILE VOLUMES command.

ANR43 command 43W process terminated - internal server error detected.

Explanation

During processing of a RECONCILE VOLUMES command, an internal server error occurs on the source server.

System action

The RECONCILE VOLUMES command is ended.

User response

Contact your service representative.

ANR43 command 44I started for device class device class (process ID process ID).

Explanation

The RECONCILE VOLUMES process whose ID is displayed has started reconciling volumes associated with the given device class.

System action

The volumes are reconciled and inconsistent volumes are displayed.

User response

None.

ANR43 45I *command completed for device class device class; (process ID process ID); volume count volumes inspected, volume count invalid volumes found, volume count volumes deleted.*

Explanation

The RECONCILE VOLUMES process whose ID is displayed has finished reconciling volumes associated with the given device class. The number of volumes reconciled and the number of invalid volumes found or deleted are displayed.

System action

None.

User response

For complete details on the results of the RECONCILE VOLUMES command for the shown device class, examine the previous messages.

ANR43 46I *command completed for device class device class; (process ID process ID); volume count volumes inspected, volume count invalid volumes found.*

Explanation

The RECONCILE VOLUMES process whose ID is displayed has finished reconciling volumes associated with the given device class. The number of volumes reconciled and the number of invalid volumes found are displayed.

System action

None.

User response

For complete details on the results of the RECONCILE VOLUMES command for the shown device class, examine the previous messages. If you suspect that volumes were inaccessible because of communications problems, correct the problems and retry the RECONCILE VOLUMES command. If the errors are valid, reissue the reconcile volumes command with FIX=YES so that the source server can attempt to correct the information.

ANR43 52I *Contacting Server server name*

Explanation

This message is displayed in response to a QUERY PROCESS command, and indicates that a reconciliation process is attempting to obtain volume information from the shown server.

System action

The reconciliation process continues.

User response

None.

ANR43 53I *Cancel in progress*

Explanation

This message is displayed in response to a QUERY PROCESS command, and indicates that a reconciliation process has been canceled. The process will end shortly.

System action

The reconciliation process terminates and server operation continues.

User response

None.

ANR43 54W *command: Source server not authorized to reconcile target server server name.*

Explanation

During processing of a RECONCILE VOLUMES command, the source server was not permitted to reconcile volume on the shown target server.

System action

The reconciliation process continues.

User response

If the source server should have permission to reconcile volumes

on the shown target server, issue the UPDATE SERVER command with FORCESYNC=YES to cause the target server to accept reconcile operations for the source server. Reissue the RECONCILE VOLUMES command.

ANR43 55W *command: Volume volume name not valid, source server missing corresponding entry for target server.*

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was reported by the target server and it has no matching volume on the source server.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either a RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases to be regressed to there current condition. If a newer database images exist for that server, consider restoring the server to that point in time. If the condition of the database on each server is acceptable and the RECONCILE VOLUMES command was

issued with FIX=NO, reissue the RECONCILE VOLUMES command with FIX=Yes to have the volume deleted from the target server.

ANR43 command:
56W **Volume volume name not valid, target server missing corresponding entry for source server.**

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on the source server and it has no matching volume on the target server.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either an RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases to be regressed to there current condition. If a newer database images exist for that server, consider restoring the server to that point in time. If the RECONCILE VOLUMES command was issued with FIX=Yes and the volume is defined in a storage pool, the access mode of the volume will be changed to unavailable to prevent attempted mounts on the source

server. If the condition of the database on each server is acceptable, issue the DELETE VOLUME or DELETE VOLHISTORY command on the source server to remove the volume from the database.

ANR43 command:
57W **Volume volume name not valid, target server volume refers to device class device class that does not exist on the source server.**

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on the target server and it is associated with the device class shown. The source server has NO corresponding device class.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either an RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases to be regressed to their current condition. If a newer database image exist for that server, consider restoring the server to that point in time. In the case

of a volume in the VOLHISTORY, the device class may have been deleted from the source server. If possible, issue the DEFINE DEVCLASS command to correct the situation. If the condition of the database on each server is acceptable and the RECONCILE VOLUMES command was issued with FIX=NO, reissue the RECONCILE VOLUMES command with FIX=Yes to have the volume deleted from the target server.

ANR43 command:
58W **Volume volume name not valid, the attributes of the volume on target server do not match the attributes on the source server.**

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on both the source and target server, but the attributes describing the volume does not match.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either a RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases

to be regressed to there current condition. If a newer database image exist for that server, consider restoring the server to that point in time. If the condition of the database on each server is acceptable, additional actions will have to be taken because RECONCILE VOLUMES FIX=YES is unable to correct this situation. In the case of a volume in the VOLHISTORY, an IMPORT PREVIEW=YES or a RESTORE DATABASE PREVIEW=YES will determine the integrity of the volume. If the volume is in error, a DELETE VOLHISTORY will remove the volume from both the source and target servers. In the case of a volume in a storage pool, an AUDIT VOLUME FIX=NO will determine the integrity of the volume. If errors are found, an AUDIT VOLUME FIX=YES may make some data on the volume accessible. Otherwise, issue the DELETE VOLUME command on the source server to remove the volume from both the source and target servers.

ANR43 command:
59W **Volume volume name not valid, the size of the volume on target server does not match the size on the source server.**

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on both the source and target

server, but the size of the volume does not match.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either an RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases to be regressed to there current condition. If a newer database image exist for that server, consider restoring the server to that point in time. If the condition of the database on each server is acceptable, additional actions will have to be taken because RECONCILE VOLUMES FIX=YES is unable to correct this situation. In the case of a volume in the VOLHISTORY, an IMPORT PREVIEW=YES or a RESTORE DATABASE PREVIEW=YES will determine the integrity of the volume. If the volume is in error, a DELETE VOLHISTORY will remove the volume from both the source and target servers. In the case of a volume in a storage pool, an AUDIT VOLUME FIX=NO will determine the integrity of the volume. If errors are found, an AUDIT VOLUME FIX=YES may make some data on the volume accessible. Otherwise, issue the DELETE VOLUME command on the source server to remove

the volume from both the source and target servers.

ANR43 60W *command:*
Volume volume name not valid, the type of the volume on target server does not match the type on the source server.

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on both the source and target server, but the type of the volume does not match. For example, the volume on the target server is defined in a storage pool, but the target server indicates that volume was used for a DATABASE BACKUP.

System action

The reconciliation process continues.

User response

The database on either the source or target server has been regressed by either an RESTORE DATABASE operation or some system facility external to the server. Investigate the action that caused one or both of the databases to be regressed to there current condition. If a newer database image exists for that server, consider restoring the server to that point in time. If the condition of the database on each server is acceptable, additional actions will have to be taken because

RECONCILE VOLUMES FIX=YES is unable to correct this situation. These actions may have to be performed on one or both servers. Use the QUERY VOLHISTORY and QUERY VOLUME commands on both servers to determine the volume type on each server. In the case of a volume in the VOLHISTORY, a DELETE VOLHISTORY on the appropriate server that will remove the volume on that server. In the case of a volume in a storage pool, the DELETE VOLUME command on the appropriate server will remove the volume on that server.

ANR43 61W *command:*
Volume volume name not valid, the target server has reported damage to all or part of the volume.

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on both the source and target server, but the target server has reported damage to all or part of the volume.

System action

The reconciliation process continues.

User response

On the target server, an audit with FIX=NO of the volumes in the storage pool used by the

source server will indicate what which volume on the target server is damaged. This AUDIT VOLUME command may be able to reset the damaged indicator in the database if the damage was temporary due to hardware problems (for example, dirty tape heads). If the volume on the target server is in a primary storage pool that has previously been backed up to a copy storage pool, attempt to correct the damage by using the RESTORE STGPOOL command. If attempts to correct the damage on the target server fail, an AUDIT VOLUME command FIX=YES from the source server will mark as damaged in the source server database each file that is inaccessible and those files will not be accessed for future operations. If the files are part of an aggregate, the entire aggregate will be marked damaged. If a usable copy of the file exists in another storage pool, that copy may be accessed for future operations involving the file.

ANR43 62W *command:*
Invalid volume volume name deleted from server server name for device class device class.

Explanation

As the result of a RECONCILE VOLUMES command that specified FIX=YES, the volume shown whose information

is displayed is deleted from the target server.

System action

The volume is deleted.

User response

None.

ANR43 command:
63W **Volume *volume***
***name* access**
changed to
***access mode*.**

Explanation

As the result of a RECONCILE VOLUMES command that specified FIX=YES, the access mode of the source volume has been changed to the value shown.

System action

The volume's access mode is changed.

User response

Review any additional messages issued by the RECONCILE VOLUMES command and correct the errors that set the volume to unavailable, or use the DELETE VOLUME command to remove it from the system.

ANR43 command:
64W **Unable to**
connect to
target server
***server name*.**

Explanation

During processing of indicated command, the source server was unable to maintain communications with the shown target server.

System action

The command process continues.

User response

Check both the source server and the target server for any additional messages that might further describe the communications problem.

ANR43 command:
65W **Prefix for**
volume *volume*
***name* does not**
match the
device class
prefix.

Explanation

As the result of a RECONCILE VOLUMES command, the volume shown was found on both the source and target server, but the beginning portion of the high-level archive file name (the prefix) on the target server does not match the prefix in the device class on the source server.

System action

The reconciliation process continues.

User response

Verify that the prefix in the device class on the source server is correct and update it if necessary. Use the RECONCILE VOLUMES FIX=YES command on the source server to rename the target archive objects to match the device class on the source server.

ANR43 command:
66I **Prefix for**
volume *volume*
***name* was**
changed to
match the
device class
prefix.

Explanation

As the result of a RECONCILE VOLUMES FIX=YES command, the beginning portion of the high-level archive file name (the prefix) on the target server was changed to match the prefix in the device class on the source server.

System action

The prefix is corrected.

User response

None.

ANR43 Storage pool
69I ***pool* has**
insufficient disk
space and the
operation will
wait for
additional space
to become
available.

Explanation

Disk space for this cloud storage pool is low.

System action

A session is waiting either for data transfer to the cloud or for additional space.

User response

To avoid waiting for additional space to become available, add more disk space.

ANR43 The source
70E **server is not**
authorized to
create volumes
on target server
***server name*.**

Explanation

The source server has attempted to create a volume on the shown target server, but the operation failed because the source server does not have the authority to create volumes.

System action

The operation fails.

User response

If the source server should have permission to create volumes on the shown target server, issue the UPDATE SERVER command with FORCESYNC=YES to cause the target server to accept volume create operations for the source server. Retry the failing operation.

ANR43 Information on
71E **the source**
server does not
match
information on
target server
***server name*.**

Explanation

The source server has determined that information contained on the shown target server no longer matches information contained on the source server.

System action

The operation fails.

User response

Issue the RECONCILE VOLUMES command to determine the problem. If possible, correct the problem and retry the failing operation.

ANR43 72E The password on the source server does not match the password on target server *server name*.

Explanation

The source server has attempted to update both the source password and the target password. An error occurred that prevented the source server from updating the target server. The passwords no longer match.

System action

The operation fails.

User response

On the target server, issue the UPDATE NODE command to change the password. On the source server, issue the UPDATE SERVER command to change the password to match the new password on the target server. Retry the failing operation.

ANR43 73E Session rejected by target server *server name*, reason: *rejection reason*.

Explanation

The source server tried to open a session with the target server. The

session was rejected for the indicated reason.

System action

The operation fails.

User response

Check both the source server and the target server for any additional messages that might further describe the reason the session was rejected. For a reason of AUTHENTICATION FAILURE, ensure that both the source and target servers are using the same password. For a reason of NO RESOURCE, ensure that the target server is enabled, has sufficient DB, LOG, and memory resource to support the source server session, and that the node name of the source server is not locked or in use. If this is a routed command, check to make sure that the administrator id being used to route the command is not locked or in use. For a reason of LICENSE FAILURE, ensure that the target server is properly licensed to support the source server session. For a reason of DOWN LEVEL, ensure that the target server program is a level new enough to support the source server session. For a reason of NODE TYPE, the source server is not allowed to establish a session with the given target server. The NODETYPE on the target server is CLIENT. The NODENAME parameter of the server definition on the source server is incorrect. The NODETYPE parameter

of the registered node on the target server is incorrect and should be NODETYPE=SERVER. For a reason of INTERNAL ERROR, use the messages on the target server to determine the problem. For all reasons, if none of the above are applicable, ensure that the target server has not disabled this server with the DISABLE SESSIONS SERVER command. Retry the failing operation.

ANR43 74E Session failure, source server detected an internal error.

Explanation

The source server ends the session because an internal logic error is detected.

System action

The source server ends the session and continues operation.

User response

To determine the source of the error, the administrator can examine server messages issued prior to this message. The QUERY ACTLOG command can be used to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR43 75E Session failure, source server has insufficient memory.

Explanation

The source server ends the session because sufficient memory (virtual memory) is not available.

System action

The source server ends the session and continues operation.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR43 76E Session failure, target server *server name* is locked on the source server.

Explanation

The source server ends the session because shown target server is locked from source server access.

System action

The source server ends the session and continues operation.

User response

Before the source server is permitted to access the target server, a properly authorized administrator must unlock the target server.

ANR43 77E Session failure, target server *server name* is not defined on the source server.

Explanation

The source server ends the session because shown target server is not defined on the source server.

System action

The source server ends the session and continues operation.

User response

The target server must be correctly defined before it can be accessed by the source server. Before you attempt the next operation, define the target server by using the DEFINE SERVER command.

If the target server is a replication server and its server definition was incorrectly deleted, redefine the server by using the DEFINE SERVER command before you attempt replication. However, if you intend to remove the target server from replication because it is no longer required, use the REMOVE REPLSERVER command to remove the target server from the list of replication servers.

ANR43 78E *For device class device class, the retry of a session with target server server name has timed out.*

Explanation

The source server has attempted to re-establish a session with the shown target server, but the RETRYPERIOD from the

given device class has been exceeded.

System action

The source server ends the operation.

User response

Determine if the target server is having a problem or considering increasing the RETRYPERIOD value.

ANR43 79E *The source server was unable to update the password on target server server name.*

Explanation

The source server has attempted to update the target password. An error occurred that prevented the source server from updating the target server.

System action

The operation fails.

User response

On the target server, determine the cause of the problem and correct it. It may be necessary for an administrator to correct the passwords with the following actions. On the target server, issue the UPDATE NODE command to change the password. On the source server, issue the UPDATE SERVER command to change the password to match the new password on the target server. Retry the failing operation.

ANR43 80E *The source server was unable to update the server validation key on target server server name.*

Explanation

The source server has attempted to update its server validation key on the target server. An error occurred that prevented the source server from updating the target server.

System action

The operation fails.

User response

On the target server, determine the cause of the problem and correct it. It may be necessary for an administrator to correct the keys with the following actions. On the source server, issue the UPDATE SERVER command with FORCESYNC=YES to cause an attempt to synchronize the keys on both the source and target servers. Retry the failing operation.

ANR43 81E *The source server was unable to register with target server server name.*

Explanation

The source server has attempted to register with the shown target server. An error occurred that prevented the source

server from registering with the target server.

System action

The operation fails.

User response

Ask an authorized administrator to submit the request on the use of the target server using REGISTER NODE command. Retry the failing operation.

ANR43 82E *Session failure, policy information from target server server name is incomplete, missing policy object.*

Explanation

The source server ends the session because the shown target server has provided policy information which is incomplete. The missing policy object is shown.

System action

The source server ends the session and continues operation.

User response

Use the appropriate commands on the target server to complete the policy definitions being used by the source server. Retry the failing operation.

ANR43 83E *Session failure, target server server name has aborted current transaction;*

reason: abort reason.

Explanation

The source server ends the session because the shown target server has aborted the current transaction for the given reason.

System action

The source server ends the session and continues operation.

User response

Check both the source server and the target server for any additional messages that might further describe the reason the transaction was aborted. Retry the failing operation.

ANR43 Node node name 84E is not allowed to establish a session as a target server.

Explanation

The node specified has attempted to establish a session with this system and this is not permitted due to the NODETYPE for this node.

System action

The operation fails.

User response

To allow the specified node to establish a session as a target server, the node must be registered with a NODETYPE of SERVER. Or else change the node name on the

target server to a node name that is allowed to establish a session using a node name that was registered with the NODETYPE=SERVER parameter specified.

ANR43 Session retry in 85I progress with target server server name.

Explanation

The source server is attempting to re-establish a session with the shown target server. Session retry processing occurs when the source server has lost the connection with a target server and a RETRYPERIOD value is specified,

System action

The source server attempts to contact the target server.

User response

Determine if the target server is having a problem and considering canceling the operation on the source server or correcting the problem with the target server.

ANR43 Session retry 86I was successful for target server server name.

Explanation

The source server has re-establish a session with the shown target server.

System action

Source server processing continues.

User response

None.

ANR43 Session session 87E number for node node name (client platform) refused - node name not registered as TYPE=CLIENT.

Explanation

The server refuses a request to start a client session because the client node name is not registered as a node of TYPE=CLIENT. This node name is already in use either as a server definition as defined by a DEFINE SERVER command or else as a node of TYPE=SERVER using the REGISTER NODE command.

System action

Server operation continues.

User response

Issue a QUERY NODE TYPE=SERVER or a QUERY SERVER to determine which server definition already is using this node name. This client should be registered using the REGISTER NODE TYPE=CLIENT command and specify a name that is not in use by any other nodes or server defined to this server.

ANR43 No expiration 88W process to cancel.

Explanation

The CANCEL EXPIRATION command was issued but there were no expiration processes currently running.

System action

Server operation continues.

User response

None.

ANR43 Expiration 89I process cancelled.

Explanation

The CANCEL EXPIRATION command was issued and successfully cancelled the current process.

System action

Server operation continues.

User response

None.

ANR43 CANCEL 90E EXPIRATION failed - unable to cancel expiration process.

Explanation

The CANCEL EXPIRATION command was issued but encountered an error. Due to this error, the command was unable to cancel the process.

System action

Server operation continues.

User response

Issue the command QUERY PROCESS to determine the process number for the expiration process and then issue the command CANCEL PROCESS for that process number. This will cancel the current expiration process.

ANR43 91I **Expiration processing node**
*node name, filesystem
filesystem name,
fsId filesystem id,
domain domain
name, and
management
class
management
class name - for
type type files.*

Explanation

Expiration processing is currently evaluating information for the node, filesystem, domain name, and management class specified for the file type indicated.

System action

Server operation continues.

User response

None.

ANR43 92I **CONTAINER DEFRAGMENTATION** started processing stgpool stgpool name. Containers are only using util pct% of cntr space due to fragmentation.

Explanation

CONTAINER DEFRAGMENTATION is attempting to free up fragmented space in the stgpool.

System action

Server operation continues.

User response

None.

ANR43 93I **CONTAINER DEFRAGMENTATION** finished reclaiming freed bytes bytes of unused space on cntr count containers in stgpool stgpool name.

Explanation

CONTAINER DEFRAGMENTATION freed up fragmented space in the stgpool.

System action

Server operation continues.

User response

None.

ANR43 94I The server database was previously restored, and an audit of the affected volumes will now start or restart. Container-copy storage pool volumes that were reused after the restore

date will be deleted.

Explanation

After a server database is restored from a previous version, the server scans the volume history file to identify container-copy storage pool volumes that were reused after the restore target date. The reused storage pool volumes are deleted.

System action

All reused container-copy storage pool volumes will be deleted. Local protect and repair processes are temporarily suspended during this process.

User response

None.

ANR43 95E *command: The command is not allowed for the node type of node node name.*

Explanation

The command is incompatible with the node type for the specified node.

System action

Processing of the command ends.

User response

None.

ANR43 96I The audit process is complete, and reused container-copy storage pool volumes were

deleted. number of volumes volumes and number of chunks extents were deleted from container-copy pools.

Explanation

After a server database was restored from a previous version, the server scanned the volume history file to identify container-copy storage pool volumes that were reused since the restore target date. Those reused volumes were deleted.

System action

All reused container-copy storage pool volumes have been deleted.

User response

Issue the PROTECT STGPOOL command with a value of TYPE=LOCAL to resume protection of the primary container storage pool to the container-copy storage pool.

ANR43 97E **Certificate delivery failed due to incorrect password definition for this server on server partner server name.**

Explanation

The server could not accept a certificate from the indicated server because that server specified an incorrect password for this server. This server will continue to deny certificate

delivery attempts by that server until a valid password is specified.

System action

Server operation continues.

User response

On the partner server, ensure that the correct password is set for this server. If the password on this server was changed, reset this server's password on the partner server by using the UPDATE SERVER command with the SERVERPASSWORD parameter.

ANR43 NAS file server 99E *NAS file server name is reporting NDMP error number NDMP error number: NDMP error description.*

System action

The process ends.

User response

To identify the cause of the network data management protocol (NDMP) error, see the documentation for the network-attached storage (NAS) file server. Review the NDMP logs for the NAS file server, resolve the error, and restart the operation.

ANR44 command: MFA 00E *could not be enabled for admin admin name because its password*

exceeds max char characters.

System action

None.

User response

Update the specified admin's password to be less than or equal to characters specified and reissue the command to set MFAREQUIRED=YES

ANR44 New password 01E *length for MFA enabled admin cannot exceed max char characters.*

System action

None.

User response

Update the specified admin's password to be less than or equal to characters specified.

ANR44 Command: 44W *Input volume volume name cannot be processed.*

Explanation

During a DSMSERV DISPLAY DBBACKUPVOLUME command, the server cannot display the necessary information about the specified backup volume.

System action

The volume is not processed. Processing continues for all the volumes in the given volume list.

User response

Examine previous error messages for the cause of failure.

ANR44 Context 45I *parameter set to value.*

Explanation

Determines if context reporting will be generated when an ANR9999D error occurs. This is turned on or off with the SET CONTEXT messaging command.

System action

None.

User response

None.

ANR44 No damaged 46I *data was identified by the AUDIT CONTAINER command (process ID process ID).*

Explanation

When you issued the AUDIT CONTAINER command and specified the ACTION=SCANDAMAGED parameter, no damaged data extents were identified.

System action

None.

User response

None.

ANR44 The 47E *operation_name operation failed*

because bucket bucket_name was not yet created on the cloud service provider. The failed operation is associated with a cloud-container storage pool or connection with the following name: generic_name.

Explanation

Before the Storage Pool or Connection can be used, the bucket must be created in the cloud provider. Once that bucket has been created the operation can be tried again.

System action

The current operation fails.

User response

To resolve the issue, complete the following steps:

1. Working with your cloud service provider, create a bucket with appropriate settings. Follow the provider's guidelines for bucket names.
2. Take one of the following actions:
 - To specify a different bucket name for the cloud-container storage pool, issue the UPDATE STGPOOL command and specify the bucket name in the BUCKETNAME parameter.

- To specify a different bucket name for a connection, issue the UPDATE CONNECTION command and specify the bucket name in the BUCKETNAME parameter.

3. Retry the operation that previously failed.

ANR44 48I The data cannot be replicated to the target storage pool. The issue might be caused by a lack of space in the target storage pool or by insufficient permissions to access the container pool directory.

ANR44 49I No memory is available on the server.

ANR44 50I No space is available for additional logs.

ANR44 51I No space is available for additional database files.

ANR44 52I The replication process stopped.

ANR44 53I The replication process was canceled.

ANR44 54I The replication transaction is not being processed.

ANR44 55I The specified object was not found.

ANR44 56I A communication error occurred between the

source and target replication servers.

ANR44 57I Corrupted data was detected.

ANR44 58I An unknown error occurred during an attempt to store a file on the target replication server. The possible cause is a failed write operation to disk storage.

ANR44 59I The data cannot be replicated to the target replication server. The issue might be caused by insufficient space in the target storage pool or by insufficient permissions to access the container pool directory.

ANR44 60I The bitfile is damaged.

ANR44 61I The table of contents (TOC) was not created.

ANR44 62I During a retrieve operation, a bitfile referenced extents that do not exist in the storage pool.

ANR44 63I The target storage pool changed.

ANR44 64I During a node replication process, an

inconsistency was detected in the extent catalogs of the source and target replication servers. The mismatch caused the node replication process to fail.

ANR44 65I An internal error occurred during the replication process.

ANR44 66I A server internal error occurred during the replication process.

ANR44 67I An unknown replication error occurred.

ANR44 68I No errors are detected on the current server. Review the return code on the other server in the replication pair.

ANR44 69I Failure to resolve chunk.

ANR44 70I Chunk is pending.

ANR44 71I Replication failed - storage media inaccessible.

Explanation

During replicatoin processing, a required media could not be mounted.

System action

The indicated replicatoin process ends.

User response

None.

ANR44 72W Storage directory is not accessible.

Explanation

The container's directory is restricted to access.

System action

None.

User response

Identify and modify the access state for the directory if possible.

ANR44 73W Data being replicated is currently unavailable.

Explanation

You tried to rereplicate data that is currently not available.

System action

None.

User response

Try to replicate data after the data is available on the server. See your system administrator.

ANR44 82E Representation al State Transfer (REST) services encountered an error during server startup. Return code=return code

Explanation

There server was unable to start REST services.

System action

Server operation continues.

User response

To resolve the issue, take the following actions:

- Ensure that the server is configured as a hub server.
- Issue the QUERY OPTION command to determine the port number that is defined for the RESTHTTPSPORT server option. Update the value of the RESTHTTPSPORT option to specify an available port number by using the SETOPT RESTHTTPSPORT command. Then, restart the server.

ANR44 83I Node *node name* issued command: Set Access copy type file space *namehigh-level addresslow-level address authorized node name ,authorize d owner name.*

Explanation

The SET ACCESS command completed.

System action

Processing continues.

User response

None.

ANR44 84I Node *node name* issued command: Delete Access copy type file

*space
namehigh-level
addresslow-level
address
authorized node
name ,authorize
d owner name.*

Explanation

The DELETE ACCESS command completed.

System action

Processing continues.

User response

None.

ANR44 85I A storage pool *space trigger* has been defined and enabled for storage pool *storage pool name.*

Explanation

A storage pool space trigger has been defined with a DEFINE SPACETRIGGER command for the specified storage pool.

System action

None.

User response

None.

ANR44 86I A default storage pool *space trigger* has been defined and enabled.

Explanation

A default storage pool space trigger has been defined and enabled. It

will be effective for any storage pools associated with a devtype=DISK device class or a devtype=FILE device class.

System action

None.

User response

None.

ANR44 87I The storage pool *space trigger* is defined for storage pool *storage pool name*, but is disabled.

Explanation

A storage pool space trigger has been defined for the indicated storage pool, but because the space expansion percentage is currently set to 0, the space trigger is disabled.

System action

None.

User response

To activate the space trigger, use the UPDATE SPACETRIGGER command to set the space expansion percentage to a value greater than 0.

ANR44 88I The default storage pool *space trigger* is defined, but it is disabled.

Explanation

A default storage pool space trigger has been defined for storage

pools associated with a devtype=DISK or devtype=FILE device class. But it has been defined without a space trigger; because the space expansion percentage is currently set to 0, the space trigger is disabled.

System action

None.

User response

To activate the space trigger, use the UPDATE SPACETRIGGER command to set the space expansion percentage to a value greater than 0.

ANR44 89I The storage pool *space trigger* has been deleted for storage pool *storage pool name.*

Explanation

A DELETE SPACETRIGGER command has successfully completed for the indicated storage pool space trigger. Space expansions are no longer triggered automatically for the specified storage pool. If a default storage pool space trigger exists, it will apply to the specified storage pool.

System action

None.

User response

None.

ANR44 90I The default storage pool

space trigger
has been
deleted.

updated and
enabled.

User response

default storage pool
space trigger is defined.

Explanation

A DELETE SPACETRIGGER command has successfully completed for the default storage pool space trigger. Space expansions are no longer triggered automatically for storage pool without a specific space trigger.

System action

None.

User response

None.

ANR44 91I The storage pool space trigger is updated and enabled for storage pool *storage pool name*.

Explanation

An UPDATE SPACETRIGGER command has successfully completed for the specified storage pool space trigger. The updated parameters specified on the command are used to automatically trigger space expansion for the storage pool.

System action

None.

User response

None.

ANR44 92I The default storage pool space trigger is

Explanation

An UPDATE SPACETRIGGER command has successfully completed for the default storage pool space trigger. The updated parameters specified on the command are used to automatically trigger space expansion for storage pools without a specific storage pool space trigger and which are associated with a devtype=FILE or devtype=DISK device class.

System action

None.

User response

None.

ANR44 93I The storage pool space trigger is updated, but disabled for storage pool *storage pool name*.

Explanation

An UPDATE SPACETRIGGER command has successfully completed for the specified storage pool space trigger. However, the space expansion percentage is currently set to 0, which disables the space trigger.

System action

None.

To activate the space trigger, use the UPDATE SPACETRIGGER command with the SPACEexpansion parameter to set a value greater than zero.

ANR44 94I The default storage pool space trigger is updated, but disabled.

Explanation

An UPDATE SPACETRIGGER command has successfully completed for the default storage pool space trigger. However, the space expansion percentage is currently set to 0, which disables the space trigger.

System action

None.

User response

To activate the space trigger, use the UPDATE SPACETRIGGER command with the SPACEexpansion parameter to set a value greater than zero.

ANR44 95E Command: Storage pool space trigger is not defined.

Explanation

The storage pool space trigger cannot be updated or deleted because it is not currently defined. If a storage pool was not specified, an attempt was made to delete the default storage pool space trigger, but no

System action

The server does not process the command.

User response

None.

ANR44 96E Command: Storage pool space trigger is already defined.

Explanation

The storage pool space trigger cannot be defined because it is already defined for the storage pool. If a default storage pool trigger is being defined, a default storage pool trigger already exists.

System action

The server does not process the command.

User response

Use the UPDATE SPACETRIGGER command to modify the indicated space trigger parameters.

ANR44 97E Command: EXPansionprefix not valid for storage pool space trigger with storage pool *Storage Pool*.

Explanation

The storage pool space trigger cannot be defined with an EXPansionprefix parameter because the specified storage pool is not associated with a

DISK-type device class. Sequential access storage pools use their associated directories for creating space when a space trigger is activated.

System action

The server does not process the command.

User response

Use the UPDATE SPACETRIGGER command to create a space trigger without using the EXPansionprefix parameter.

ANR44 Command: 98E STGPOOL
Storage Pool is not eligible for a storage pool space trigger.

Explanation

The indicated storage pool cannot have a space trigger defined, because it is not associated with a DISK-type or a FILE-type device class, or it is a RECLAMATIONTYPE=SNA PLOCK storage pool.

System action

The server does not process the command.

User response

Use the DEFINE SPACETRIGGER command to create a space trigger with a storage pool whose device class is of type DISK or FILE, or is not a RECLAMATIONTYPE=SNA PLOCK storage pool.

ANR44 Command: Base 99E backup set name Backup

Set Name could not be found.

Explanation

No full backup sets whose name begins with the specified backup set name prefix could be found.

System action

The server does not process the command.

User response

Use the QUERY BACKUPSET command to list available full backup sets and reissue the command with the backup set name prefix of an existing full backup set. If no full backup set exists, then do not specify the BASE parameter until after a full backup set has been generated.

ANR45 Writing 00I sequential volume history information to defined files.

Explanation

The server is updating all sequential volume history files defined in the server options file with information on sequential volume usage information. The files updated are those specified with the VOLUMEHISTORY option in the server options file.

System action

Server operation continues.

User response

None.

ANR45 Sequential 01I volume history information successfully written to file name.

Explanation

The server is updating all sequential volume history files defined in the server options file with information on sequential volume usage information. Volume history information was successfully written to the file specified.

System action

Server operation continues.

User response

None.

ANR45 No files have 02W been defined for automatically storing sequential volume history information.

Explanation

The server is attempting to update all sequential volume history files defined in the server options file with information on sequential volume usage information. Because no files were configured for receiving this information, the automatic operation fails.

System action

Server operation continues.

User response

To have the server automatically record sequential volume history information to assist in server recovery, use the VOLUMEHISTORY option in the server options file to specify where history information should be written. If you update the options file, restart the server.

ANR45 The server 03W current date current date is earlier than the date in a server record server date.

Explanation

The server has detected that the current system date is an earlier date than the date in a server record that is being processed. Possible causes for this problem are the current system date is invalid, the server was previously run with a future date, or there is an error in the server record. If the server was run with a future date, this message will continue to appear until that date has passed, or all records with the future date have been deleted from the server.

System action

Processing continues. The processing for the current object may not occur as expected.

User response

On the machine on which the server is running, verify that the system date is correct.

ANR45 04E *Command: The specified point in time is earlier than the point in time of the base backup set.*

Explanation

The point in time specified for the differential backup set is earlier than the point in time of its base backup set.

System action

The server does not process the command.

User response

Reissue the command, specifying a later point in time.

ANR45 05E *Required table of contents could not be created for backup set for node name as set name (data type data type).*

Explanation

A table of contents could not be created for the named object set, but a table of contents was required (TOC=YES was specified or implied).

System action

The backup set is deleted.

User response

Correct the problem that prevented the table of contents from being created and generate the backup set again.

ANR45 06W *Backup set for node name as set name (data type data type) requires a table of contents.*

Explanation

The specified backup set requires a table of contents, but TOC=YES was not specified.

System action

The server will attempt to create a table of contents for the backup set. If the table of contents creation fails, the backup set will be deleted.

User response

None.

ANR45 08I *Audit Container (Scan Damaged) process started for container container name (process ID process ID).*

Explanation

As the result of an AUDIT CONTAINER command that specified scan action for the container shown, the process whose ID is displayed has begun auditing the previously marked damaged data extents on a given container.

System action

The previously marked damaged data extents on a container are audited. If a data extent is no longer damaged, it will be reset as not damaged.

User response

None.

ANR45 10E *The server could not write sequential volume history information to volume history file name. To restore the database, access to this file is required.*

Explanation

While attempting to write sequential volume history information to defined history files, the server could not write to the specified file. The database cannot be restored until this file can be accessed.

System action

The server does not write volume history information to the file specified

User response

Examine any error messages that may have been displayed prior to this message and correct any problems. Ensure that the server has permission to write to the file indicated and that there is sufficient space in the file system for the file. On MVS, ensure that the data

set has been allocated and that the server has permission to write to the data set. After correcting the problem, use the BACKUP VOLHISTORY command to write sequential volume history information to the file.

ANR45 11E *Volume history file volume history file name could not be opened. To restore the database, access to this file is required.*

Explanation

While attempting to read or write sequential volume history information from defined history files, the server was unable to open the specified file name. The database cannot be restored until this file can be accessed.

System action

The server does not read or write volume history information from the specified file.

User response

Examine any error messages that may have been displayed prior to this message and correct any problems. Ensure that the server has permission to write to the file indicated and that there is sufficient space in the file system for the file. On MVS, ensure that the data set has been allocated and that the server has permission to write to the data set.

ANR45 12E A database transaction failure was encountered in processing sequential volume history information.

Explanation

While attempting to process sequential volume history information, the server encountered a database transaction error.

System action

The operation fails.
Usage for a sequential volume was not properly recorded for later reference.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. If this does not resolve the problem, contact your support representative.

ANR45 13E A database lock conflict was encountered in processing sequential volume history information.

Explanation

While attempting to process sequential volume history information, the server encountered a database locking conflict.

System action

The operation fails.
This usually means

that usage for a sequential volume was not properly recorded for later reference

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. If this does not resolve the problem, contact your support representative.

ANR45 14E Sufficient database space is not available for the server while processing sequential volume history information.

Explanation

While attempting to process sequential volume history information, the server found that sufficient database space was not available for updates.

System action

The operation fails.
Usage for a sequential volume was not properly recorded for later reference.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR45 15E Sufficient recovery log space is not available for the

server while processing sequential volume history information.

Explanation

While attempting to process sequential volume history information, the server finds that sufficient recovery log space is not available for updates.

System action

The operation fails.
Usage for a sequential volume was not properly recorded for later reference.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY

or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR45 16E Server could not read sequential volume history information from any defined files.

Explanation

While attempting to read sequential volume history information from defined history files, the server finds that it cannot open any of the files defined in the server options file.

System action

The server does not read volume history information. If the current server task requires this information, the task ends.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to read from the defined volume history files. If you are doing a database restore, issue RESTORE DB DEVCLASS=VOL.

ANR45 17E No files have been defined for storing sequential volume history information - information cannot be read.

Explanation

The server is attempting to read from at least one of the volume history files defined in the server options file. Since no files were defined for this information the read operation fails.

System action

Server operation ends.

User response

You can restore the database specifying the volume names for each restore operation (in order) up to the desired point-in-time. If a volume history file is available, specify its name in the server options file and retry the operation.

ANR45 Volume history 18E file file name line line number does not have the proper format - read operation fails.

Explanation

The server is attempting to read from a volume history file and encounters a record that does not have the proper format.

System action

Server operation terminates.

User response

Examine the file specified to determine if the invalid record can be located and corrected. If the file is corrupted or does not contain valid volume

history entries, it cannot be used for the desired operation.

ANR45 Volume History 19W File does not reflect latest Storage Agent Updates

Explanation

The storage agent failed to have the volume history file on the server updated with the latest changes from the storage agent.

System action

The storage agent continues processing.

User response

To bypass the problem, a BACKUP VOLHIST command can be issued from an admin client connected to the server. The problem may be due to a temporary loss of communication with the server.

ANR45 Storage Pool 20I storage pool name is being skipped during a space allocation. A request for request amount megabytes was made but only available amount megabytes were available.

Explanation

A request for storage was made in the indicated storage pool. The storage pool has a capacity of the number of megabytes shown. The requested

amount can not be satisfied in the storage pool being skipped. The next storage pool, if any, will be tried in an attempt to satisfy the request.

System action

The storage server skips the indicated storage pool and tries to allocate storage in a "next" pool.

User response

More space can be created in the storage pool by increasing the number of scratch volumes allowed (use the UPDATE STGPPOOL poolname MAXSCRATCH=xx command), by creating private volumes in the storage pool (use the DEFINE VOLUME poolname volname command), or by creating a storage pool space trigger to monitor storage in the storage pool. The storage pool space trigger can also automatically create new FILE volumes when space triggers are exceeded (use the DEFINE SPACETRIGGER STG STGPPOOL=poolname command).

ANR45 The number of 21E volumes specified in the BACKUP DB command is not sufficient. The backup failed.

Explanation

The backup volume provided in the input parameter for BACKUP DB command is not sufficient.

System action

BACKUP DB terminates.

User response

Provide more input volumes.

ANR45 RESTORE DB 22E failed with LOG file error.

Explanation

The LOG file is not associated with the current log sequence.

System action

RESTORE DB terminates.

User response

Issue REMOVE DB first and retry the RESTORE DB.

ANR45 Storage Pool 23I Space expansion triggered. Storage Pool storage pool name with capacity of capacity megabytes requires percentage percent expansion for expansion amount bytes of additional space.

Explanation

A triggered space expansion has started for the indicated storage pool. The storage pool has a capacity of the number of megabytes shown. It is being expanded by the indicated percentage as

directed by the storage pool space trigger for this storage pool, or by the default storage space trigger if this storage pool has no dedicated trigger of its own. The percentage is represented by the additional amount of space indicated.

System action

Space expansion begins.

User response

None.

ANR45 24I *Volume volume name defined in Storage Pool storage pool name as a result of storage pool triggered space expansion.*

Explanation

A triggered space expansion has caused the indicated volume to be created in the storage shown in the message. The volume definition is the result of a storage pool space trigger definition which allocates new space when the space trigger space threshold is met.

System action

Processing continues.

User response

None.

ANR45 25E *Failure to define volume volume name in Storage Pool storage pool name. Return codereturn code.*

Explanation

A triggered space expansion has caused an attempt to create the indicated in the storage pool shown in the message. The volume creation failed with the indicated return code. The volume was not added to the storage pool. Additional messages with specific information on the failure are displayed from the volume creation process.

System action

Processing continues.

User response

It might be necessary to take action based on the failure message from the volume creation process. Such actions might include changing the storage space trigger definition, ensuring that hardware is function properly, or ensuring that the server is set up with sufficient permissions to access and create files on the file system to which IBM Storage Protect is writing.

ANR45 26E *Storage Pool Space trigger for storage pool name is ended; the thread resource not available.*

Explanation

The server cannot start a thread to handle storage pool expansion for the indicated storage pool.

System action

Server processing continues but the storage pool is not expanded.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR45 27W *Storage Pool Space trigger for storage pool name is disabled after volume definition failures expansion failures. Insufficient space for pool expansion.*

Explanation

The server failed to complete a storage pool expansion for the indicated storage pool. The number of failures in pool expansion is also displayed.

System action

Server processing continues but the storage pool is not expanded. The storage pool space trigger for the indicated storage pool is disabled.

User response

Allocate additional storage space to the server. For storage pools of device type FILE, additional directories may be added to the list of directories that the associated device class uses for storage. If this

action is taken, the corresponding storage agent directories should be added via the UPDATE PATH command. The storage pool space trigger may be re-enabled with the UPDATE SPACETRIGGER STG STPOOL=xx command, where xx is the storage pool for which expansion has failed (no space trigger parameters need be updated).

ANR45 28W *Storage Pool Space Expansion for storage pool name is disabled due to previous expansion failures. After addressing space requirements, an UPDATE SPACETRIGGER STG command must be issued to allow automatic stgpool expansion.*

Explanation

The server failed to complete a storage pool expansion for the indicated storage pool. The storage pool space trigger is disabled due to previous expansion failures. The storage pool space trigger may be re-enabled with the UPDATE SPACETRIGGER STG STPOOL=xx command, where xx is the storage pool for which expansion has failed (no space trigger parameters need be updated).

System action

Server processing continues but the storage pool is not expanded. The storage pool space trigger for the indicated storage pool remains disabled. This message is re-issued periodically when expansion is required but the storage pool space trigger remains disabled.

User response

Allocate additional storage space to the server. For storage pools of device type FILE, additional directories may be added to the list of directories that the associated device class uses for storage. If this action is taken, the corresponding storage agent directories should be added via the UPDATE PATH command. The storage pool space trigger may be re-enabled with the UPDATE SPACETRIGGER STG STPOOL=xx command, where xx is the storage pool for which expansion has failed (no space trigger parameters need be updated).

ANR45 An automatic full database backup will be started. The last log number used is last log used and the first log number used is first log used. The log file size is log file size megabytes. The maximum log file size is maximum log

file size megabytes.

Explanation

When the log space used since the last database backup exceeds the maximum log file size, a full database backup is started.

System action

User response

ANR45 Database 33E database name is invalid and cannot be created.

Explanation

Follow all of these rules when choosing a database name or alias:

- Character strings that represent names of a database can contain any of the following characters: a-z, A-Z, 0-9, @, #, and \$.
- A database name or alias must be unique in the database instance.
- A database name or alias is one to eight characters in length.
- The first character of the name must be an alphabetic character, or a @, a #, or a \$ character.
- The first three characters of the name cannot be any of the following strings: SYS, DBM, or IBM.

System action

DSMSERV FORMAT processing stops.

User response

Choose a different database name which meets the criteria indicated above and issue the DSMSERV FORMAT command again.

ANR45 The active log 34E size of active log size MB exceeds the available space active log space MB.

Explanation

There is not enough space for the active log size specified in the DSMSERV FORMAT command.

System action

None.

User response

Ensure that the file systems you are using for database and recovery log activities have enough space. Reissue the DSMSERV FORMAT command and specify a smaller value for the active log size.

ANR45 The active log 35E directory active log directory is not valid.

Explanation

The active log directory that is specified in the DSMSERV FORMAT command does not exist.

System action

The database format operation failed.

User response

Verify that the file systems you have specified for formatting the server database and recovery log are valid. Reissue the DSMSERV FORMAT command with a valid active log directory.

ANR45 File Processor 36E Value Unit table xml file could not be found or opened for read access.

Explanation

The file could not be found or opened.

System action

Contents of the file are not parsed and loaded to the database.

User response

Verify that the file exists in either the server instance directory or the server installation directory. If the file does exist verify permissions for read access. If the file does not exist obtain a copy from the IBM processor value unit website.

ANR45 The active log 37I space used is log space used is megabytes, and the active log space available is log space available megabytes. The ratio, active log used ratio, exceeds the threshold log utilization threshold.

Explanation

When the active log space used exceeds the log utilization threshold, the active log space must be increased.

System action

None.

User response

Increase the size of the active log space. For information about increasing the size of the active log space, search for "active log" in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR45 38E The server could not write sequential volume history information to the volume history file name temporary file.

Explanation

The server failed to write to the specified file. The volume history file cannot be updated until this temporary file can be accessed.

System action

No volume history information was written to the temporary file specified.

User response

Examine any error messages that might have been displayed prior to this message and correct any problems. Ensure

that the server has permission to write to the specified file and that the file system has sufficient space for the file.

ANR45 39E There is a mismatch in directory count between Device Class device class name and Path Definition for Server server name. The device class has directory count directories while the path definition has path directory count directories.

Explanation

The server was assigning a shared FILE library volume to a server or storage agent. Share FILE libraries require a matching number of directories in the PATH definition for the server or storage agent's access to FILE drives and the server's device class definition. For example, if the server has the following device class definition: DEFINE DEVCLASS SFILE DEVTYPE=FILE MOUNTL=10 SHARED=YES DIR=D:\DIR1,E:\DIR2,F:\DIR3 a FILE library name SFILE will be created along with 10 drives named SFILE1 to SFILE10 in shared library SFILE. Each of these drives might have scratch volumes created in directories D:\DIR1, E:\DIR2 or F:\DIR3. (For UNIX Platforms,

substitute UNIX style names in the example).

For library clients and storage agents, the appropriate directory paths from those systems must be defined using the DEFINE PATH command. An example, in this case, might be DEFINE PATH STA1 SFILE1 SRCTYPE=SERVER DESTTYPE=DRIVE DIR=V:\DIR1,W:\DIR2,X:\DIR3 LIBRARY=SFILE which means that server (or storage agent) STA1 accesses directory D:\DIR1 using V:\DIR1 from the STA1 system, E:\DIR2 on the server is accessed using W:\DIR2 on STA1, and that F:\DIR3 is accessed using X:\DIR3 on STA1. If the number of directories between the PATH and DEVCLASS do not match, there could be problem in accessing the resulting file in the future.

System action

Processing continues. Another directory path is chosen. This might result in a subsequent access failure by the storage agent.

User response

Use the QUERY DEVCLASS classname F=D and the QUERY PATH pathname F=D commands to compare the directory lists for the device class and the path and ensure that they are synchronized.

ANR45 40I Container container name is now pending - Container will be deleted from storage pool

storage pool name after the reuse delay period for this storage pool has elapsed.

Explanation

All files have been deleted from the indicated container. The container will not be removed from the storage pool until the reuse delay time period for the indicated storage pool has elapsed.

System action

None.

User response

None.

ANR45 41W Damage was found in the container name container before it was transferred to a cloud environment.

Explanation

One or more data extents were marked as damaged during the transfer operation.

System action

The transfer of the container from local storage to the cloud environment continues.

User response

After the transfer operation is completed, you can determine the location of damaged data extents by using the QUERY DAMAGED

command. To remove objects that refer to damaged data, issue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAGED parameter.

ANR45 42E *Audit command: Invalid server for device class device class id in DevClass.Dirs table. The server name in the table is server name.*

Explanation

A database audit process finds a directory entry with a server which is either not defined or has an invalid length in the DevClass.Dirs table. This table relates directories to device classes and paths. The class ID of the table entry is shown, along with the server name. However, if the server name has an invalid length, only blanks are shown.

System action

Audit processing continues.

User response

If the FIX=YES parameter was specified, the data base record with the incorrect entry will be deleted. Otherwise, reissue the audit command with FIX=YES, so that the incorrect record can be deleted. After records with incorrect entries have been removed, review directories associated with device classes and paths with the

following commands:
QUERY DEVCLASS F=D
QUERY PATH F=D

ANR45 46W *A ping request to server 'server name' was not able to establish a connection by using server credentials.*

Explanation

The failure could indicate a problem on the source or target server, or in the connection between the servers.

System action

No connection was established.

User response

To identify and resolve the issue, complete the following steps: 1. Check the activity log and server console for messages that indicate a failure or problem on the source server. 2. Check the communication connection between the servers. 3. Verify the server definition and password on both servers. 4. Verify that the target server is running. 5. Correct any identified issues.

ANR45 47W *The clock on the remote server server_name differs from the clock on the local server by seconds seconds.*

Explanation

The clocks on the local and remote servers are not consistent. This can

cause various problems such as inconsistent status reporting.

System action

Server operation continues.

User response

Make sure that the clocks on all servers are set correctly. If possible, use an internet time service to automatically synchronize the clocks.

ANR45 48W *command: The specified at-risk interval of interval hours exceeds the activity summary retention of retention days.*

Explanation

The activity summary is used to determine if a client has been backed up within the at-risk interval. If the interval exceeds the activity summary retention, the server may not be able to find a qualifying backup and would consider the client to be unprotected.

System action

Processing continues.

User response

Either invoke the command again to reduce the interval or use the SET SUMMARYRETENTION command to increase the activity summary retention.

ANR45 50I *Full database backup (process*

process ID) completed. Total bytes backed up: total DB bytes.

Explanation

A full database backup process has completed. The output volumes used in this backup may be used during a database restore operation.

System action

None.

User response

None.

ANR45 51I *Incremental database backup (process process ID) completed. Total bytes backed up: total DB bytes.*

Explanation

An incremental database backup process has completed. The output volumes used in this backup may be used in conjunction with any preceding volumes in the backup series during a database restore operation.

System action

None.

User response

None.

ANR45 55I *Database backup process process ID canceled.*

Explanation

The database backup process was canceled by an administrator with the CANCEL PROCESS command.

System action

The database backup process is ended.

User response

None.

ANR45 58I **Snapshot database backup (process process ID) completed. Total bytes backed up: total DB bytes.**

Explanation

A differential database backup process has completed. The output volumes used in this backup may be used in conjunction with preceding volumes in the full backup during a database restore operation.

System action

None.

User response

None.

ANR45 59I **Backup DB is in progress.**

Explanation

The database backup in process.

System action

None.

User response

None.

ANR45 60E **Command: Command failed because the target replication server is down level.**

Explanation

The specified command failed because the target replication server version is not compatible with the source server for replication or protect operations.

System action

System operation continues, but the command fails.

User response

Upgrade the target replication server to Version 8.1.9 or later. Then, reissue the command.

ANR45 61W **The command failed because the administrator is in the transitional state for multifactor authentication (MFA). Only the GENERATE SECRET and HELP commands are valid in this state.**

Explanation

The specified command could not be processed because additional steps are required for MFA.

System action

System operation continues, but the command fails.

User response

If the shared secret that is used for MFA was previously set by using the SHAREDSECRET parameter on the REGISTER ADMIN or UPDATE ADMIN command, try to log in again by providing the password and the token generated from the shared secret. If the shared secret was not previously set, issue the GENERATE SECRET command to display a randomly generated shared secret to be used to generate a token for MFA.

ANR45 62W **The GENERATE SECRET command failed because the command can be issued only by an administrator in the transitional state for multifactor authentication (MFA).**

Explanation

The GENERATE SECRET command is used by administrators to obtain a shared secret. The administrator must be in the MFA transitional state and must be logging on for the first time after MFA was enabled. A shared secret is a string that is shared between the server and an administrator's

authentication application to generate a time-based one time password (TOTP) that must be specified along with the administrator's password when logging into the server.

System action

System operation continues, but the command fails.

User response

No action is required.

ANR45 63E **Command: The command failed because administrator administrator name is a managed object.**

Explanation

A new shared secret cannot be generated for managed administrators on the managed server. Managed objects can only be updated on the configuration manager server.

System action

System operation continues, but the command fails.

User response

To generate a shared secret take one of the following actions:

- Delete the subscription to the configuration profiles that the object is associated with.
- Log in on the managing server and reissue

the GENERATE SECRET command.

ANR45 Administrator 64E *administrator name cannot sign in because the administrator enrollment process for multifactor authentication (MFA) is not completed. The enrollment process must be completed for this administrator on configuration manager server server name.*

Explanation

The administrator is a managed object on this server and cannot sign in until the enrollment process is completed on the named configuration manager server.

System action

System operation continues.

User response

To resolve the issue, complete the multifactor enrollment process on the specified configuration manager server.

ANR45 Command: 65E *Administrator administrator name cannot disable multifactor authentication (MFA) for its own ID.*

Explanation

The administrator is not allowed to specify MFAREQUIRED=NO when updating its own administrative ID.

System action

System operation continues.

User response

Reissue the command without the MFAREQUIRED=NO parameter.

ANR45 Administrator 69W *administrator name is configured to use multifactor authentication (MFA) but managed server server name does not support MFA.*

Explanation

The administrator on the managed server cannot be configured to use MFA.

System action

The administrator is updated on the managed server but MFAREQUIRED=YES is not specified.

User response

No action is required.

ANR45 Database 70E *backup/restore terminated - device class device class name not defined.*

Explanation

During database backup or restore processing, an error occurred because the specified device class is not defined.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is terminated.

User response

For database backup, make sure the specified device class is defined. For database restore processing, make sure the device class has a definition in a device configuration file that is pointed to in the server options file.

ANR45 Database 71E *backup/restore terminated - insufficient number of mount points available for removable media.*

Explanation

During database backup or restore, the server cannot allocate sufficient mount points for the volumes required.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is ended.

User response

For database backup, make more mount points available if necessary. For database restore processing, make sure the device class has sufficient mount points defined in the device configuration information file that is pointed to in the server options file.

ANR45 Database 72E *restore terminated - excessive read errors encountered.*

Explanation

During database restore, read errors occur that prevent the restore from continuing.

System action

Database restore processing stops.

User response

Use a different device for the restore operation. If the problem persists, contact your service representative.

**ANR45 Database
73E backup
terminated -
excessive write
errors
encountered.**

Explanation

During database backup, write errors occur that prevent the backup from continuing.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again.

User response

If possible, determine and correct the cause of the write errors. If the problem cannot be corrected, contact your service representative.

**ANR45 Database
74E backup/restore
terminated -
data transfer
interrupted.**

Explanation

During a database backup or restore operation, a data transfer operation has been interrupted and cannot be continued.

System action

If the database backup was started with the BACKUP DB command,

the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is ended.

User response

If possible, determine and correct the cause of the interruption. If the problem cannot be corrected, contact your service representative.

**ANR45 Database
75E backup/restore
terminated -
sufficient
recovery log
space is not
available.**

Explanation

During a database backup or restore operation, the server runs out of recovery log space.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is terminated.

User response

For database backup, make more server recovery log space

available, if necessary. For database restore, contact your service representative.

**ANR45 Database
76E backup/restore
terminated -
sufficient
database space
is not available.**

Explanation

During a database backup or restore operation, the server runs out of database space.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. The database restore process attempts to set the database capacity to the required capacity to hold the database being restored. If this fails, the restore operation is ended.

User response

For database backup, make more server database space available, if necessary. For database restore, make sure that the size of the online database is at least the same capacity as the database being restored.

**ANR45 Database
77E backup
terminated -**

**volume already
in use.**

Explanation

During a database backup operation, a volume cannot be used because it is already defined in a storage pool, or has been previously used by an export, a database dump, or a database backup operation (as recorded in the volume history) or is in use by another process.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again.

User response

Specify a volume that is not in use or defined in a storage pool, and that has not been previously used for an export, a database dump, or a database backup operation as recorded in the server volume history information. The QUERY VOLUME command may be used to display the names of volumes that are defined to server storage pools. The QUERY VOLHISTORY command may be used to display the names of volumes that have been used for export, database dump, or database backup operations.

**ANR45 Database
78E backup/restore
terminated -
required volume
was not
mounted.**

Explanation

During a database backup or restore operation, a required volume cannot be mounted, because the mount request was canceled.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is terminated.

User response

Issue the command again or wait for the server to retry the backup and make sure the necessary volumes are accessible. If you are restoring a database to a given date or doing a roll-forward restore, restart the entire restore operation. If you are restoring a single database backup with COMMIT=NO, reissue the restore command. If you are restoring a database backup with COMMIT=YES, restore the complete backup series from the beginning.

**ANR45 Database
80E backup/restore
terminated -**

**insufficient
memory
available.**

Explanation

During a database backup or restore operation, there was not enough server memory available.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the server waits for the retry period to expire and then tries the database backup again. A database restore is terminated.

User response

If necessary, make more memory available to the server.

**ANR45 Database
81W backup/restore
terminated -
internal server
error detected.**

Explanation

During a database backup or restore operation, the server encounters an internal error.

System action

If the database backup was started with the BACKUP DB command, the database backup is ended and server operation continues. If the database backup was triggered automatically, the backup stops and the

server waits for the retry period to expire and then tries the database backup again. A database restore is terminated.

User response

Contact your service representative.

**ANR45 Database
82E restore
terminated -
volume cannot
be used.**

Explanation

During a database restore operation, a volume has been mounted but cannot be used.

System action

The restore operation is terminated.

User response

If a volume list was specified on the command, make sure the correct volume is being specified and mounted. If no volume list was specified, contact your service representative.

**ANR45 Database
83E backup
terminated -
output media
full and scratch
media could not
be mounted.**

Explanation

During a database backup operation, an out-of-space condition occurred writing to the sequential media, and a scratch volume cannot be mounted.

System action

The database backup is ended and server operation continues.

User response

Reissue the command and specify additional volume names on the command, or specify SCRATCH=YES.

**ANR45 Volume History
85W File does not
exist - Backup/
Restore DB
operation
requires volume
history file.**

Explanation

Volume history file is needed for the backup/restore DB operation. .

System action

.

User response

Please specify volume history file in the dsmserv.opt.

**ANR45 Not able to get a
86E Db2 connection.
Backup DB
operation will
be terminated.**

Explanation

Db2 connection is needed for the backup DB operation. .

System action

Backup DB operation is terminated.

User response

Verify database manager resources. Submit command again.

ANR45 Database backup or restore configuration is incorrect; client node *node name* was attempted to be used for this operation.

Explanation

A server database backup or restore operation was attempted and failed. The indicated client node was used for the operation which is incorrect. The server database backup and restore operations are a restricted protocol and require the explicit use of client node name `$$_TSMDBMGR_$$`.

System action

Database backup or restore operation failed and is terminated.

User response

Verify that the configuration of the `dsm.sys` file used by the IBM Storage Protect API for the system where the server is installed. The server stanza in the `dsm.sys` file for the database backup must be configured as follows:

- The NODENAME option must specify `$_TSMDBMGR_$$`.
- If the server is configured for database backup and restore using TCP/IP, the server TCP/IP address must be loopback (127.0.0.1).

- The server is configured to listen on the appropriate TCP/IP port or SHMPORT.

ANR45 A database backup configuration might be incorrect.

Explanation

A server database backup operation failed. The server database backup and restore operations are a restricted protocol and require the explicit use of the client node name `$$_TSMDBMGR_$$`.

System action

The database backup operation fails and is ended.

User response

On AIX and Linux operating systems, verify that the configuration of the `dsm.sys` file used by the IBM Storage Protect API for the system where the server is installed. The server stanza in the `dsm.sys` file for the database backup must be configured as follows:

- The NODENAME option must specify `$_TSMDBMGR_$$`.
- If the server is configured for database backup and restore using TCP/IP, the server TCP/IP address must be loopback (127.0.0.1).
- The server is configured to listen on the appropriate TCP/IP port or SHMPORT.

ANR45 The Db2 connection was lost following a database restore operation.

Explanation

The server database was restored, but the Db2 connection failed. For this reason, if the path to the Db2 log directory was changed as part of a DB restore operation, the database path to the log directory was not updated automatically.

System action

The server database is restored.

User response

If the path to the Db2 log directory did not change, no action is needed. If the path to the Db2 log directory changed, you must manually update the path when the server is started. To update the path, connect to the Db2 database and change the configuration, as described in the following example:

- Start Db2: `db2start`
- Connect to TSMDB1: `db2 connect to TSMDB1`
- Update the Db2 database configuration: `db2 update db cfg using NEWLOGPATH (log path from server options, e.g. /ALOG/tsminst1)`
- Terminate the connection to TSMDB1: `db2 terminate`
- Recycle Db2: `db2stop/db2start`

- Verify that the new log path is in takes effect: `db2 connect to TSMDB1; db2 get db cfg | grep "Path to log files (on UNIX) "`
- Verify that the new log path is in takes effect: `db2 connect to TSMDB1; db2 get db cfg | find "Path to log files (on Windows) "`

ANR45 Selected backup series *seriesId* from *date and time* as best candidate available for restore database processing.

Explanation

The DSMSEV RESTORE DB command evaluates the volume history file using the criteria specified for the command to determine the best candidate database backup to use.

System action

None.

User response

Evaluate the backup series, date, and time reported to determine if this meets the desired restore objectives. If these do not meet the objectives, re-issue the DSMSEV RESTORE DB with additional or changed information in order to achieve the desired recovery objectives.

ANR45 Restore database backup series *seriesId*

includes eligible operation *opId* with volume *volume name* having sequence *sequence* and using device class *device class*.

Explanation

The DSMSERV RESTORE DB command evaluates the volume history file using the criteria specified for the command to determine the best candidate database backup to use. The *opId* and *volume name* for the indicated *device class* are candidate volumes that will be evaluated and used for the restore database process.

System action

None.

User response

Evaluate the backup series, date, and time reported to determine if this meets the desired restore objectives. If these do not meet the objectives, re-issue the DSMSERV RESTORE DB with additional or changed information in order to achieve the desired recovery objectives.

ANR45 93E Restore database unable to find eligible candidate to use for processing.

Explanation

The DSMSERV RESTORE DB command evaluates the volume history file using the criteria specified for the command to determine the best candidate database backup to use. No eligible candidate backup series was found.

System action

None.

User response

Evaluate the volume history file and available volumes to use for restore of the database. Manually add entries to the volume history file for a backup series and corresponding volumes to consider for restore database processing.

ANR45 94E Restore database expects volume *volumeName* for backup series *seriesID* and operation *operationID* but it could not be found in the available volume history files.

Explanation

Once the DSMSERV RESTORE DB command selects a candidate database backup series, it will validate the information from the backup data stream and compare it to the information available from the volume history file. In this case, the database backup requires

the specified volume for restore processing of this backup series but this volume was not found in the available volume history file information.

System action

None.

User response

Evaluate the volume history file and available volumes to use for restore of the database. If the specified volume is available, than add an entry to the volume history file for this volume and retry the operation. If this volume is not available, than remove all entries from the volume history that are assigned to this backup series ID. Once those entries are removed, retry the database restore operation and it will attempt to select the next best candidate for processing.

ANR45 95E Restore database expects a stream sequence *stream* for backup series *seriesID* and operation *operationID* but it could not be found in the available volume history files.

Explanation

Once the DSMSERV RESTORE DB command selects a candidate database backup series, it will validate the

information from the backup data stream and compare it to the information available from the volume history file. In this case, the database backup has information for the indicated stream sequence but it has been unable to find any information about volumes used for that stream within this backup series and operation.

System action

None.

User response

Evaluate the volume history file and available volumes to use for restore of the database. If additional volumes are available for this series and operation, than add entries to the volume history file for these volume and retry the operation. If no other volumes are available, than remove all entries from the volume history that are assigned to this backup series ID. Once those entries are removed, retry the database restore operation and it will attempt to select the next best candidate for processing.

ANR45 96E The restore database operation is unable to validate the selected database backup for series *seriesID* and operation *operationID* against the

actual data from the database backup stream.

Explanation

When the DSMSESV RESTORE DB command selects a candidate database backup series, it will validate the information from the backup data stream and compare it to the information available from the volume history file. In this case, the database backup is missing information that is needed in order to perform a restore of the server database.

System action

None.

User response

This error can be caused by one of the following conditions: 1. All of the necessary volumes are not available and specified in the volume history file. 2. The release level of the server database backup is different from the release level of the server that is being restored. For example, error ANR4596E will occur when you restore a V6.2 database and you are using a V6.3 IBM Storage Protect server. 3. You have the wrong volume that is designated with sequence 10001. If a volume in the volume history file for this backup series and operation is assigned 10001, try assigning a different volume as sequence 10001. The volume assigned sequence

10001 is expected to have the self-describing validation information and signatures that are used by the restore process for the validation of an operation for a backup series. The restore will fail if this information is not found or is incorrect.

ANR45 97E *Operation **operationId** for backup series **seriesID** does not reference volume **volumeName**, the volume history information is not correct.*

Explanation

Once the DSMSESV RESTORE DB command selects a candidate database backup series, it will validate the information from the backup data stream and compare it to the information available from the volume history file. In this case, the volume history information reports a volume assigned to a given series and operation but that backup does not reference that volume.

System action

None.

User response

This may be caused by one of two possible cases. The first is that the transaction log information recorded for this backup to make this database referentially

consistent required more than one volume to store this information. This should be referenced with a write sequence number greater than 10001. If this was assigned a sequence value less than this value, it would be considered as a database backup volume which would result in this error. Alternatively, if this volume simply does not belong to this database backup series or operation, that would result in this failure as well. Removing this entry from the volume history file to eliminate it from consideration for this backup series and operation or correcting the operation id and series id to an appropriate value would also resolve this. After considering the cases above and taking action for one or the other of them, retry the restore database operation.

ANR45 98I *Validating database backup information for selected backup series **seriesId** and operation **operationId** using volume **volumeName**.*

Explanation

The database backup information for the selected backup series selected from the volume history will be validated against the information from the database backup itself. The volume history information will be cross-checked to insure that the backup series, necessary volumes, and

other attributes of the database backup are correct and complete for this operation. Note that if the database restore operation includes incremental database backups, the validation will be done using the volumes assigned to sequence number 10001 for operationId 0 and the operationId representing the best candidate for restore of the incremental database backup data.

System action

None.

User response

If the information is cross-checked and validated successfully, the database restore will be attempted using this database backup series and corresponding volumes. If the information fails to validate, additional messages will be issued indicating what is missing or why the selected database backup series and volumes can not be used. In the case that the validation failed, review the other messages and take the corrective action specified by those messages and then retry the database restore operation.

ANR45 99W *Could not create the server database log directory **Log directory**.*

Explanation

During a database restore operation, directories for active, archive, mirror,

and archive failover logs might be created. Errors can occur during creation of these directories due to permission, path, or file system issues.

System action

The database restore was successful. However, the server might not be running with the specified log directories.

User response

Review the server options file and the output of the QUERY LOG F=D command. Ensure that the configured log directories were created and have the required access permissions. If you make changes, restart the server.

ANR46 00E When the server wrote to the configuration file *file name* for the object agent, an error occurred.

Explanation

The configuration file for the object agent is not created.

System action

The server operation continues.

User response

Ensure that the server has the appropriate authority to write to the configuration file and that sufficient space is available for the configuration file in the file system.

ANR46 01I A configuration file for the object agent was created in the instance directory and is ready to set up. To configure and start a service for object agent *agent name*, run the following command:
script name file name

Explanation

Use the startObjectAgent script with the configuration file to configure and start a service for the object agent. This is a one time set-up process.

System action

User response

To configure the service, use either administrative or root user privileges.

ANR46 02E No volumes found for *TODATE date time*.

Explanation

No volumes were found in the volume history files that meet the date and time parameters specified.

System action

The server does not process the command.

User response

Reissue the command with a valid date and time.

ANR46 03I The volume history file that existed before the upgrade to Version 6.3 or later was saved under another name: *file name*.

Explanation

After an upgrade of IBM Storage Protect server to V6.3 or later, if you want to revert to the previous release, you must have the original volume history file. The reason is that the V6.3 or later volume history file has a different format than the earlier volume history file. The newer volume history file cannot be used to restore the IBM Storage Protect database to the previous release.

System action

The system saves the previous volume history file under another name to ensure that it is not overwritten.

User response

To restore the IBM Storage Protect database, use the saved volume history file.

ANR46 04E Restore database volume header magic number *magic* does not match the expected volume header magic number of *expected magic*. This volume cannot be used to

restore the database.

Explanation

Each volume contains an IBM Storage Protect volume header that begins with a header magic number. A bad magic number indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure that this volume is a valid database backup volume. If the volume is corrupted, restore the database to a different time using a different set of backup volumes.

ANR46 05E Restore database volume header version number *version* does not match the expected volume header magic number of *expected version*. This volume cannot be used to restore the database.

Explanation

Each database backup volume contains an IBM Storage Protect version number in the volume header. A mis-matched version number indicates

that this volume is either corrupted or not suitable for restoring the database. This volume may be a pre Version 6.3.0 database backup volume. It cannot be used to restore an IBM Storage Protect V6.3 database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure that this volume is a valid database backup volume. If this volume is corrupted, restore the database to a different time using a different set of backup volumes.

ANR46 Restore 06E database volume header backup series number *series* does not match the expected backup series number of *expected series*. This volume cannot be used to restore the database.

Explanation

Each database backup volume contains an IBM Storage Protect backup series number in the volume header. A mis-matched backup series number indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure this volume is valid for a database backup operation. If the volume is valid, the volume history file can be modified to match this series number and you can reissue the DSMSEV RESTORE DB command. If the problem persists, this volume may be corrupted. Restore the database to a different time using a different set of backup volumes.

ANR46 Restore 07E database volume header backup operation number *operation* does not match the expected backup operation number of *expected operation*. This volume cannot be used to restore the database.

Explanation

Each database backup volume contains an IBM Storage Protect backup operation number in the volume header. A mis-matched backup operation number indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure this volume is valid for a database backup operation. If the volume is valid, the volume history file can be modified to match this operation number and you can reissue the DSMSEV RESTORE DB command. If the problem persists, this volume may be corrupted. Restore the database to a different time using a different set of backup volumes.

ANR46 Restore 08E database volume header backup type *backup type* is invalid. This volume cannot be used to restore the database.

Explanation

Each database backup volume contains an IBM Storage Protect backup type code in the volume header. An invalid backup type code indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure this volume is valid for a database backup operation. If this volume is corrupted, restore the database to a different time using a different set of backup volumes.

ANR46 Restore 09I database process found *backup type* database backup timestamp *timestamp* from database backup media.

Explanation

This is the backup timestamp that is used for a database restore operation.

System action

User response

ANR46 Command: An 10E object agent server is already defined.

Explanation

Because the DEFINE SERVER command was previously issued, an object agent already exists on the server. Only one object agent can be specified per server.

System action

The server does not process the command.

User response

To define an object agent server, delete the existing object agent. Alternatively, update the already defined object agent server.

ANR46 Command:
11E Invalid server name - server name. An object agent server cannot be used as a target replication server.

Explanation

A SET SERVERNAME command has been entered that specifies an invalid server name.

System action

The server does not process the command.

User response

Reissue the command with a valid server name.

ANR46 Command:
12E Object agent server server name is not eligible for this command.

Explanation

The server *server name* is not a valid server. Object agent servers cannot be specified with this command.

System action

The command fails.

User response

Retry the command specifying an eligible server or group.

ANR46 Meta data for restore database volume backup volume is not valid. This volume cannot be used to restore the database.

Explanation

Backup volumes contain IBM Storage Protect meta data. Invalid meta data indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure this volume is valid for a database backup operation. If this volume is corrupted, restore the database to a different time using a different set of backup volumes.

ANR46 The database backup timestamp of backup timestamp on media on database backup media with backup type backup type does not match the backup timestamp

backup timestamp from volhist from the volume history file. This volume cannot be used to restore the database.

Explanation

Mis-matched timestamps indicates that this volume is either corrupted or not suitable for restoring the database.

System action

The server does not process the DSMSEV RESTORE DB command.

User response

Check the volume history file to make sure this volume is valid for a database backup operation. If this volume is corrupted, restore the database to a different time using a different set of backup volumes.

ANR46 The server is unable to restore the database due to inaccessible media.

Explanation

The database restore operation cannot be completed. Possible reasons include:

- The device configuration file is not correctly defined to access the media.
- There is a problem with the media.

System action

The database is not restored.

User response

Review the information in the message explanation and take action to correct any problems with the device configuration file or media. Reissue the RESTORE DB command.

ANR46 Database restore terminated because the media header cannot be found - Db2 sqlcode sqlcode and Db2 error message sqlerrmc.

Explanation

During a restore operation, the Db2 database was unable to find the media header. There might be a problem with the media.

System action

The database restore is terminated.

User response

Check if the IBM Storage Protect server reports an error for the media. Ensure that the media that is used for the database backup is working.

ANR46 A ping request to server 'server name' was able to establish a connection by using server credentials.

Explanation

The server credentials are valid.

System action

The connection was established.

User response

No action is required.

ANR46 18I The server credentials can not be authenticated for server *server name* because the server has no defined password.

Explanation

The server password is missing.

System action

Server operation continues.

User response

If you want to use server-to-server functions such as enterprise configuration or node replication, a server password is required. To specify a password, issue the following command: UPDATE SERVER *server name* SERVERPASSWORD=*password* The password must match the password that is set by the SET SERVERPASSWORD command.

ANR46 19E Command: The requested server certificate cannot be displayed.

Explanation

The certificate is unavailable.

System action

Server operation continues.

User response

None.

ANR46 20I Database backup series *Backup series operation device class device class*.

Explanation

The device class used for the backup is shown.

System action

None.

User response

None.

ANR46 21I The service that is associated with object agent *agent name* must be deleted by running the *script name* script with configuration file *file name*.

Explanation

The service to run the object agent server is no longer needed because the server was deleted.

System action

User response

To stop and delete the service for this object agent server, use either administrative or root user privileges to run the script with the configuration file.

ANR46 22I Volume *volume sequence number in backup operation: volume name*.

Explanation

The volume sequence and name for a full or an incremental database backup are shown.

System action

None.

User response

None.

ANR46 23E The definition for object agent *agent name* must specify an HLADDRESS that matches an address in the server's default certificate.

Explanation

The DEFINE SERVER command for the object agent has an HLADDRESS value that doesn't match a value in the server's default certificate.

System action

The object agent definition failed.

User response

To resolve the issue, complete the following steps: 1. Find the default certificate for the server by issuing the following command from the server instance directory: gsk8capicmd_64 -cert -list -db cert.kdb -stashed 2. To view details about the certificate, issue the following command from the server instance directory: gsk8capicmd_64 -cert -details -db cert.kdb -label "default-label" where "default-label" is the value that is obtained in the preceding command. 3. Look for a subject alternative name (SAN) in the output. If a SAN is not found in the output, look for a name in the subject field. 4. Ensure that the DEFINE SERVER command uses an HLADDRESS value that matches an address in the server default certificate.

ANR46 24I Preview processing for a database restore operation has completed.

Explanation

The database restore command was issued with PREVIEW=YES specified. The server will evaluate the volume history information and report the details about what it found. It will report the candidate database backup that was selected based on the restore command that was specified. If the database restore

processing is unable to find a viable database backup to use for restore or other errors occur during this evaluation, these will also be reported.

System action

None.

User response

Review the other messages issued to determine the outcome of the database restore preview operation.

ANR46 Database backup failure while attempting to use number of streams streams, backup will be retried using one stream.

Explanation

The database backup process failed while attempting the operation with the specified number of streams. The operation will be retried with a single stream.

System action

The database backup will be automatically retried using a single stream.

User response

Review the other messages issued to determine the reason for the failure of the database backup while using multiple output streams. Also review the process completion and other message to

determine if the retry using a single stream was successful.

ANR46 Database backup will use number of streams streams for processing with the number originally requested number requested.

Explanation

The database backup will be performed using the specified number of streams. The original number of streams requested, either through the command or the NUMSTREAM setting for SET DBRECOVERY, is also displayed.

System action

The database backup will be performed with the indicated number of streams.

User response

Note that if the number of streams used for the database backup differs from the number requested, this indicates either a configuration error or that the device being used does not have as many drives available as was previously considered and planned for. Review the device class and NUMSTREAM settings used for the database backup command to determine if changes are needed or if actions are needed to bring drives back online.

ANR46 The object might be incomplete for node name: type=type, file space=filespace name, object=object name.

Explanation

The IBM Storage Protect V7.1.0 server exported the object of type *type* for *node name*, identified by *file space* and *object name*. The named object might be incomplete.

System action

The IMPORT operation proceeds.

User response

Restore, retrieve, or recall the named object. Verify that all contents of the file are stored properly.

ANR46 Device device name failed to close with error code errno.

Explanation

The IBM Storage Protect server cannot close the device.

System action

The close operation fails.

User response

Check the error code value, get the device driver trace and contact the device vendor.

ANR46 Attempting to restore a fragmented file through an earlier-level

storage agent. The file will not be restored: Node node name, Type file type, File space filespace name, File name file name.

Explanation

When the storage agent attempts to restore a fragmented file, the file is not restored. This behavior occurs during a classic restore by using a storage agent earlier than version 7.1.

System action

The file is not restored.

User response

Complete one of the following actions to resolve the problem:

- Restore the file from LAN explicitly.
- Restore the file through a no-query restore.
- Upgrade the storage agent to a level at version 7.1 or later.

Refer to APAR IT02547 for more information about the problem.

ANR46 Container container name in storage pool storage pool cannot be opened. Audit will mark the container as unavailable and all the data extents in it as damaged.

Explanation

The AUDIT CONTAINER process encountered an open error for the specified container while attempting to read a data extent. The container will be marked unavailable, and all extents within the container will be marked damaged.

System action

None.

User response

Identify and resolve the open error for the container, if possible. Verify that the container's physical device is functioning properly and that the container is usable.

ANR46 31W Header of container *container name* in container storage pool *storage pool* is corrupted. Audit will mark the container as unavailable and will record all content as damaged.

Explanation

While attempting to access the container's data, the container header was found to be corrupted. The container will be marked unavailable.

System action

None.

User response

Identify and resolve the invalid header for the container if possible. Verify that the container's physical device is functioning properly and that the container is usable.

ANR46 32E Session *session number* cannot store data in the container storage pool on the target replication server. There is insufficient space in the container storage pool *stgpool name*.

Explanation

During replication processing, there was insufficient free space available in the container storage pool on the target replication server.

System action

The replication process fails.

User response

Issue the DEFINE STGPOOLDIRECTORY to define a new storage pool directory for the container storage pool on the target replication server.

ANR46 33W Storage pool *directory dir name* in storage pool *stgpool name* can not be accessed due to its access state *access*.

Explanation

The specified container's directory is restricted to access.

System action

None.

User response

Identify and modify the access state for the stgpool directory if possible.

ANR46 34I Starting point-in-time database restore to date *date time*.

Explanation

A point-in-time database restore with the TODATE parameter specified has begun. When this restore is complete, the database will be committed to the point in time of this backup.

System action

None.

User response

None.

ANR46 35I Point-in-time database restore complete, restore date *date time*.

Explanation

A point-in-time database restore with the TODATE parameter specified has completed. The database is committed to the point in time of this backup, which may be different than the

TODATE specified. If this is the case, an additional message will be displayed.

System action

None.

User response

None.

ANR46 36I Starting roll-forward database restore.

Explanation

A roll-forward database restore has begun. When this restore is complete, the database will be returned to its most recent state.

System action

None.

User response

None.

ANR46 37I Roll-forward database restore complete.

Explanation

A roll-forward database restore has ended. All database backups in the most current backup series have been restored, and all updates to the database since the most recent backup have been rolled forward. The database has been returned to its most recent state.

System action

None.

User response

None.

ANR46 38I Restore of backup series backup series number operation backup operation in series in progress.

Explanation

During a DSMSEV RESTORE DB, the server displays the backup series and operation currently being restored.

System action

None.

User response

None.

ANR46 39W Container container name in storage pool storage pool cannot be opened because of incorrect privilege. The audit container process marks the container as unavailable.

Explanation

The server reports an error for the specified container during the audit container process. The server cannot read the data extent because the privilege is incorrect for the server instance ID. The container is marked as unavailable.

System action

None.

User response

Identify and resolve the open container error, if possible. Verify that the server instance ID has the correct privilege to access the container.

ANR46 40E Failed to retrieve space statistics from directory directory name.

Explanation

The IBM Storage Protect server cannot gather space statistics for the directory.

System action

The directory space stats operation fails.

User response

Ensure that the directory has the correct permissions and can be accessed by the IBM Storage Protect server.

ANR46 41W command: Replication is disabled because node name is not eligible for replication.

Explanation

When you issue the REPLICATE NODE command, the specified node fails to replicate. Client deployment package nodes are processed for replication by the server and are not eligible for processing by an administrator or schedule.

System action

Replication processing fails for the specified node.

User response

Replication processing fails for the specified node.

ANR46 42E An operation to back up or restore a server database failed because of an IBM Db2 SQL code error: code error. If this operation involves an encrypted database, you must use the same dsmkeydb.sth and dsmkeydb.kdb files that were used during the initial backup operation.

Explanation

A problem was detected by Db2 encryption libraries.

System action

The specified operation is ended.

User response

For more information about the error, open the Db2 command-line processor window and type a question mark followed by a space and the code error number.

For example, if the SQL code error number is SQL2062, type:

? SQL2062

If you are restoring data from an encrypted database backup, ensure that the dsmkeydb.sth and dsmkeydb.kdb files on the server are the same files that were used during the backup operation. These files are used for encryption and decryption. If the database backup is configured for cloud storage, the dsmkeydb.kdb and dsmkeydb.sth files are stored in encrypted form in the cloud.

After you issue the DSMSEV RESTORE DB command with your cloud credentials and the password that was used to encrypt the key files during the backup operation, the server can retrieve the files from the cloud.

ANR46 43I Volume volume with number of bytes bytes is in the storage class cloud storage class. Before you can read data from the volume, the volume must be staged.

Explanation

A STAGE VOLUME command was issued for the specified volume with the ACTION=PREVIEW or ACTION=CHECKSTATUS parameter setting to query the cloud provider. The response indicates that the volume must be staged before data can be read. When you stage a volume, you retrieve the data from

cloud archive storage to standard storage.

System action

System operation continues.

User response

Before you stage the volume, consider the potential cost. Cloud providers typically charge an additional fee for staging objects from archive storage to a standard storage class that supports direct access. To stage the volume, reissue the STAGE VOLUME command and specify the ACTION=STAGE parameter setting.

ANR46 44I When the command was issued, the following information was retrieved from the cloud provider: *non-archive count* is the number of volumes that are not stored in archive storage classes. *count of staged volumes* is the number of volumes that were staged from archive storage. *in progress count* is the number of volumes that are in the process of being staged. *requires staging count* is the number of volumes that must be

requested for staging.

Explanation

A STAGE VOLUME command was issued with the ACTION=CHECKSTATUS parameter setting. During command processing, the cloud provider was queried for information about the retention set's volumes.

System action

System operation continues.

User response

Before you stage volumes, consider the potential cost. Cloud providers typically charge an additional fee for staging objects from archive storage to a standard storage class. Optionally, take one or both of the following actions:

- To stage the volumes, reissue the STAGE VOLUME command and specify the ACTION=STAGE parameter setting.
- If volumes are in the process of being staged, periodically reissue the STAGE VOLUME command with the ACTION=CHECKSTATUS parameter setting to determine when the volumes can be read.

ANR46 45I The restore date reflects the most recent backup available up to

the specified TODATE.

Explanation

During a DSMSERV RESTORE DB with the TODATE parameter, the date of the restored backup was not identical to the date specified on the command. The backup series that was restored is the most recent backup series up to and including the specified date.

System action

None.

User response

Make sure the date of the restored database is satisfactory. If it is not, restore the database again by specifying a different TODATE or by restoring individual database backups.

ANR46 46I Volume volume has number of bytes bytes and is in the storage class cloud storage class. The volume can be read without being staged.

Explanation

A STAGE VOLUME command was run to query the cloud provider. The response indicates that the volume must not be staged because the volume is in a cloud storage class that allows direct access.

System action

System operation continues.

User response

No action is required. Data can be read from the volume immediately.

ANR46 47I Volume volume has number of bytes bytes and is in the storage class cloud storage class. The volume was staged and can be read immediately. For continued read access, the volume must be restaged before the following date: *expiration date* (UTC).

Explanation

A STAGE VOLUME command with a parameter setting of ACTION=PREVIEW or ACTION=CHECKSTATUS was issued to query the cloud provider. The response indicates that the specified volume is staged and can be directly accessed.

System action

System operation continues.

User response

Data can be read from the specified volume immediately. Optionally, to specify how many days the volume will remain staged, reissue the STAGE VOLUME command with the ACTION=STAGE

parameter setting and specify the DURATION parameter.

ANR46 48I *Volume volume has number of bytes bytes and is in the storage class cloud storage class. The volume is in the process of being staged.*

Explanation

A STAGE VOLUME command was issued to query the cloud provider for the specified volume. The response indicates that the volume was requested for staging. The volume is expected to be available for read access after the staging process is completed.

System action

System operation continues.

User response

No action is required. However, to determine when the volume will be ready for read access, reissue the STAGE VOLUME command periodically with the ACTION=CHECKSTATUS parameter setting.

ANR46 49I *The output from the command command indicates that the following number of volumes require staging: number of volumes volumes (totaling number of bytes bytes).*

Explanation

The STAGE VOLUME command was issued with the ACTION=PREVIEW parameter setting to query the cloud provider about the retention set volumes. The query returned the specified results.

System action

System operation continues.

User response

No action is required. Optionally, you can take one or more of the following actions:

- Before you stage volumes, consider the potential cost. Cloud providers typically charge an additional fee for staging objects from archive storage to a standard storage class for read access.
- To stage volumes, reissue the STAGE VOLUME command with the ACTION=STAGE parameter setting.
- To determine when the volumes that are being staged will be available for read access, periodically reissue the STAGE VOLUME command with the ACTION=CHECKSTATUS parameter setting.

ANR46 50I *Command: All volumes in retention set retention set ID are available to be read immediately.*

Explanation

The STAGE VOLUME command was issued to query the cloud provider. The response indicates that the retention set does not have volumes that require staging. All retention set volumes can be directly accessed for reading.

System action

System operation continues.

User response

No action is required. Data can be read from the retention set immediately.

ANR46 51I *The command command is being processed. The staging process started for the following number of volumes: number of volumes to be staged. The duration of availability in standard storage was updated for the following number of volumes: number of staged volumes.*

Explanation

The STAGE VOLUME command was issued to send one or more requests to the cloud provider. The specified totals show the number of volumes that were

requested for staging, updating, or both.

System action

System operation continues.

User response

No action is required. However, if volumes are in the process of being staged, you can periodically reissue the STAGE VOLUME command with the ACTION=CHECKSTATUS parameter setting. In this way, you can determine when the volumes are ready for read access.

ANR46 52E *No system message queues available for communications .*

Explanation

While IBM Storage Protect was trying to establish a communications session, an attempt to acquire a system message queue failed. This usually means that the system-imposed limit on message queues has been reached.

System action

The communications session is not initialized due to lack of system resources.

User response

Increase the maximum number of message queues on the system and try the operation again. This is normally accomplished

by increasing the value in the kernel's msgmni file.

ANR46 Incremental backup DB failed. Can not perform incremental DB backup without a FULL DB backup performed first.

Explanation

A FULL DB backup has to be performed at least once before any Incremental DB backup can be performed.

System action

The incremental DB backup is terminated.

User response

Reissue the backup db command with type=FULL.

ANR46 The restore db to most current time can not be done since contents of the active or archive log directories have been changed. The DB will be restored to the last full or full plus incremental state.

Explanation

The restore DB can only restore to the last FULL backup.

System action

User response

Do not modify contents of active or archive log directories before attempting a dsmserv roll forward restore command.

ANR46 Volume volume 55E name cannot be opened. The volume must be staged before you attempt to open the volume for read operations.

Explanation

Before you open a volume in an archive cloud storage class for a read operation, the volume must be staged by using the STAGE VOLUME command. After the volume is staged, you can open the volume for read access during restore operations.

System action

System operation continues, but the volume is not opened.

User response

To stage the volume, issue the STAGE VOLUME command and specify the volume name. For example, if the volume is named VOL1, you would issue the following command:

```
stage volume vol1
```

ANR46 Invalid key-ring file password 56E Key Ring password

Explanation

The specified key-ring file password exceeds the maximum password length of 64 characters.

System action

None

User response

Specify a key-ring file password using 1-64 characters. Ensure that the password is the same value that was specified with the key-ring file password utility.

ANR46 SNMP: Failed to 57E connect to server at address address, port port.

Explanation

The SNMP client was attempting to run a session with the server at the indicated address and port number in response to an SNMP Get Request, which causes a Server Script to be run. The subagent failed to connect to the server.

System action

The SNMP subagent ends this attempt to run the script and continues operation.

User response

Ensure that the indicated server is up and able to initiate admin clients using the TCP/IP protocol.

ANR46 No key-ring file 58I password was found.

Explanation

Either a QUERY command was issued to display the key-ring file password or a SET command was issued to inform the server of a change to the key-ring file password. A password was not recorded by the server.

System action

None

User response

To create a key-ring file or to generate a password, the server must run with secure sockets layer (SSL) transmission control protocol (TCP) port options. If the server did not run with SSL TCP port options, start the server while the options file contains the SSLTCPPOPT or SSLTCPADMINPORT option. Then issue the QUERY SSLKEYRINGPW command to display the generated password. If you use an external utility to change the key-ring file password after the server creates the key-ring file and its password, issue the SET SSLKEYRINGPW command to inform the server of the change.

ANR46 SNMP: 59E Communication s failure: bad verb received (verb type).

Explanation

The SNMP client encountered an invalid communications verb during a session with the server and is not able to

continue processing the session.

System action

The SNMP session ends and subagent operation continues.

User response

Contact your service representative.

ANR46 Connected to 60I SNMP subagent at SNMP subagent address on port port number.

Explanation

The server has successfully connected to the SNMP subagent at the indicated address and port.

System action

The server will now register with the subagent.

User response

None.

ANR46 SNMP 61E communication with the subagent failed because a thread resource was not available.

Explanation

The server could not continue with SNMP communication to the SNMP subagent because sufficient memory is not available for starting additional processes on the server.

System action

The server discontinues SNMP processing and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR46 Failure sending 62W message to SNMP subagent.

Explanation

The server experienced an error return code from TCP/IP while sending to the SNMP subagent. This message is also issued when the SNMP subagent has an error sending a verb to the server when acting as an SNMP client. This may be a normal event if either side of the connection is abruptly ended, as in the case of terminating the subagent program. The error is reflected in another message for TCP/IP which further describes the error.

System action

The session is ended. Server operation continues. If a message is being forwarded to an SNMP managing node, the message is not sent. If a heartbeat message was being sent to the subagent, this heartbeat message is lost and the server attempts to re-start its session with the SNMP subagent.

User response

If the session is ended as a result of intentionally stopping either the subagent, no response is required. Otherwise, ensure that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 Failure receiving 63W message from SNMP subagent.

Explanation

The server experienced an error return code from TCP/IP while receiving data from the SNMP subagent. This may be a normal event if either side of the connection is abruptly ended, as in the case of terminating the subagent program. The error is reflected in another message for TCP/IP which further describes the error.

System action

The session is ended. Server operation continues. If a heartbeat message was being sent to the subagent, this heartbeat message is lost and the server attempts to re-start its session with the SNMP subagent. If the server was attempting to register to the SNMP subagent, heartbeat messaging will be disabled until the server is re-started.

User response

If the session is ended as a result of intentionally stopping

either the subagent, no response is required. Otherwise, ensure that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 Failure in 64W registering with SNMP subagent.

Explanation

The server experienced a problem while attempting to register with the SNMP subagent. This may be due to problems with communication or the SNMP subagent being unavailable.

System action

Heartbeat messaging will be disabled until the server is re-started.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 Failure retrying 65W registration with SNMP subagent.

Explanation

The server experienced a problem while attempting to re-register with the SNMP subagent after losing contact. This may be due to problems with communication or the SNMP subagent being unavailable.

System action

Registration is re-tried for a number of attempts before giving up.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 66W Failure sending heartbeat message to SNMP subagent.

Explanation

The server experienced a problem while attempting to send a heartbeat message to the SNMP subagent. This may be due to problems with communication or the SNMP subagent being unavailable.

System action

The server will attempt to contact the SNMP subagent again and re-synchronize.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 67W Failure retrying heartbeat message to SNMP subagent.

Explanation

The server experienced a problem while attempting

to send a heartbeat message to the SNMP subagent. This may be due to problems with communication or the SNMP subagent being unavailable.

System action

The server attempted to contact the SNMP subagent again and re-synchronize, but this too failed. Heartbeat functions are disabled until the server is re-started.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use. Re-start the server if the heartbeat function is required.

ANR46 68I Connection successfully re-established with SNMP subagent.

Explanation

The server experienced a problem while attempting to send a heartbeat message to the SNMP subagent.

System action

The server was able to successfully resynchronize with the SNMP subagent.

User response

None.

ANR46 69W Heartbeat message was

not accepted by SNMP subagent.

Explanation

The server experienced a problem while attempting to send a heartbeat message to the SNMP subagent. The SNMP subagent was unable to accept the heartbeat message. If the subagent was stopped and re-started, this is a normal message.

System action

The server will attempt to contact the SNMP subagent again and re-synchronize.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is functioning by using the tools that come with the particular TCP/IP suite on the platform in use.

ANR46 70W Failure in opening session with SNMP subagent.

Explanation

The server experienced a problem while attempting to open a session with the SNMP subagent.

System action

Processing continues. Heartbeat and message forwarding function will not be available.

User response

Ensure that the subagent is running and that the TCP/IP protocol stack is

functioning by using the tools that come with the particular TCP/IP suite on the platform in use. If heartbeat and message forwarding functions are required, re-start the server.

ANR46 71W SNMP subagent did not accept registration of this server.

Explanation

The server experienced a problem while attempting to open a session with the SNMP subagent. The subagent is available but disallowed registration by this server.

System action

Processing continues. Heartbeat and message forwarding function will not be available.

User response

It may be necessary to stop the subagent and re-start it. Then stop the server and re-start it if heartbeat and message forwarding functions are required.

ANR46 72W SNMP message forwarding to the SNMP subagent was not started because a thread resource was not available.

Explanation

The server could not continue with SNMP communication to the SNMP subagent for message forwarding because sufficient

memory is not available for starting additional processes on the server.

System action

The server discontinues SNMP message processing and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR46 Error starting DPI thread - 74E
Return code:
Return code received from called routine.

Explanation

The SNMP subagent could not start the DPI thread.

System action

Initialization of the subagent fails.

User response

Contact your service representative.

ANR46 command: This 75W
command may take a while to finish.

Explanation

A command has been invoked that could potentially run for a while.

System action

The administrator is asked whether to continue.

User response

Enter 'Y' to continue with the command or 'N' to terminate the command.

ANR46 Unable to 76E
register another server.

Explanation

The SNMP subagent received a request to register a new server and was unable to allocate the memory necessary to register the new server.

System action

The subagent will not register the new server.

User response

Contact your service representative.

ANR46 Session 77I
established with server name: *The name of the registered server..*

Explanation

The SNMP subagent completed the registration of the identified server.

System action

The subagent will wait for additional requests from the server.

User response

None.

ANR46 Session closed 78I
with server name: *The name of the deregistered server..*

Explanation

The SNMP subagent completed the deregistration of the identified server.

System action

None.

User response

None.

ANR46 Messages are no 79W
longer being forwarded to the SNMP subagent.

Explanation

The server has encountered multiple errors in forwarding messages to the SNMP subagent. Messages are no longer being forwarded.

System action

The server continues operating, but messages are no longer being forwarded.

User response

Message forwarding can be re-initialized by either stopping the server and re-starting it. Message forwarding will also be re-started if the heartbeat function is in use and the server re-synchronizes with the subagent. This re-synchronization occurs if the subagent, dsmsnmp, is stopped for longer than a single heartbeat interval (the heartbeat interval is a server option and appears in the output of the

QUERY OPT command) and then restarted.

ANR46 Connect to 81W
SNMP agent failed, will keep trying.

Explanation

The subagent has failed in an attempt to connect to the SNMP agent.

System action

The subagent keeps retrying the connection.

User response

Make sure that the SNMP daemon is up, running and correctly configured.

ANR46 A SNMP agent 82W
connection error occurred. Attempting to re-establish connection.

Explanation

An error has occurred in the communication between the subagent and the SNMP agent.

System action

The subagent will attempt to reconnect.

User response

Make sure that the SNMP daemon is up, running and correctly configured.

ANR46 Unable to open 83E
trace file 'file name'.

Explanation

An error occurred while opening the file for writing trace data.

System action

The subagent continues operation without tracing.

User response

Ensure there is adequate space on the drive from which you are running the subagent and retry the program.

ANR46 84E **Trap request failed - RC:**
Return code from the trap request. Server index: Server index number..

Explanation

An error occurred while attempting to process a trap request from a server. data.

System action

The subagent processing continues.

User response

Make sure that the SNMP daemon is up, running and correctly configured.

ANR46 85E **Insufficient memory for subagent initialization.**

Explanation

The SNMP subagent could not initialize due to the inability to obtain the required memory.

System action

Initialization of the subagent fails.

User response

Allocate additional memory to the subagent.

ANR46 86E **Insufficient memory for subagent trace initialization.**

Explanation

The SNMP subagent trace could not initialize due to the inability to obtain the required memory.

System action

Initialization of the subagent fails.

User response

Allocate additional memory to the subagent.

ANR46 87E **Server/ subagent protocol violation - expecting registration request. Received request: The value of the request that was received.**

Explanation

The SNMP subagent was expecting a registration request. It actually received something other than a registration request.

System action

The subagent will stop processing requests from the server sending the invalid requests.

User response

Contact your service representative.

ANR46 88E **Server/ subagent protocol violation - incorrect request header version.**

Explanation

The SNMP subagent received a request from a server that was not at the same maintenance level as the subagent.

System action

The subagent will stop processing requests from the server sending the invalid requests.

User response

Ensure the server and subagent are at the same maintenance level. If they are, contact your service representative.

ANR46 89E **Invalid request type received (The value of the request that was received.).**

Explanation

The SNMP subagent received an unexpected request from the server.

System action

The subagent will stop processing requests from the server sending the invalid requests.

User response

Contact your service representative.

ANR46 90E **Unexpected request type (The value of the request that was received.) in trap data header.**

Explanation

The SNMP subagent received an invalid trap request from a server.

System action

The subagent will stop processing requests from the server sending the invalid requests.

User response

Contact your service representative.

ANR46 91I **DPI subagent (The subagent name.): connected, ready to receive requests.**

Explanation

The subagent has successfully connected to the SNMP agent.

System action

The subagent is ready to receive request from servers.

User response

None.

ANR46 92I **DPI subagent (The subagent name.): reconnected, ready to receive requests.**

Explanation

The subagent has successfully reconnected to the SNMP agent.

System action

The subagent is ready to receive request from servers.

User response

None.

ANR46 SNMP Subagent 94E Port Confirmation Has Failed.

Explanation

The server was communicating configuration data to the SNMP subagent. An error occurred in the exchange. The server could not communicate interface information to the subagent.

System action

The server continues operation. The SNMP administrative interface is inoperative.

User response

The most likely cause of this problem is a temporary network failure. The server should be re-started to retry the connection to the SNMP subagent. If this problem occurs repeatedly, please contact you service representative.

ANR46 SNMP: 95E Communications Failure in Receiving "verb type" verb.

Explanation

The SNMP client encountered a communications error in using the *verb type* verb to transfer information to or from the server and an SNMP client.

System action

The SNMP session ends and server operation continues.

User response

This may not be a problem if the SNMP subagent was terminated while the session was in progress. Otherwise, ensure that TCP/IP communications is running normally.

ANR46 SNMP: Failed to 97E authenticate to server at address address, port port.

Explanation

The SNMP client was attempting to run a session with the server at the indicated address and port number in response to an SNMP Get Request, which causes a Server Script to be run. The subagent connected to the indicated server, but failed in authentication.

System action

The SNMP subagent ends this attempt to run the script and continues operation.

User response

Ensure that the indicated server has an administrative id of SNMPADMIN and that this administrative id has sufficient authority to run the script and commands it contains.

ANR46 SNMP: 98E Communications Failure in Sending "verb type" verb (command).

Explanation

The SNMP client encountered a communications error in using the *verb type* verb to issue command *command*.

System action

The SNMP client session ends and subagent operation continues.

User response

Contact your service representative.

ANR46 SNMP: Receive 99E Buffer overflow.

Explanation

The SNMP client encountered an overflow error in transferring information to or from the server.

System action

The SNMP client session ends and subagent operation continues.

User response

Contact your service representative.

ANR47 The server move 00I batch size has been set to new batch size. Move operations that start after this point will use the new value.

Explanation

A SETOPT command was used to set the value for the move batch size value. This setting determines the maximum number of files that are moved on the server in one database transaction, dependent also on the setting for the move size threshold. The setting influences file movement for server migration, reclamation, storage pool backup, and move data operations.

System action

The server uses this new setting for move operations that are started after this message is issued.

User response

Contact your service representative.

ANR47 The server move 01I size threshold has been set to new threshold. Move operations that start after this point will use the new value.

Explanation

A SETOPT command was used to set the value for the move size threshold value. This setting determines

the maximum number of megabytes that are moved on the server in one database transaction, dependent also on the setting for the move batch size. The setting influences file movement for server migration, reclamation, storage pool backup, and move data operations.

System action

The server uses this new setting for move operations that are started after this message is issued.

User response

Contact your service representative.

ANR47 02I The server transaction group maximum has been set to new value. Client sessions that are started after this point will use the new value.

Explanation

A SETOPT command was used to set the value for the maximum number of files that can be sent from the client in a single database transaction.

System action

The server uses this new setting for client sessions that are started after this message is issued.

User response

Contact your service representative.

ANR47 04I key-ring filename and password have been set. Restart the server to use the new settings

Explanation

The key-ring filename have been set to the new value specified in the DEFINE KEYRING command.

System action

None.

User response

Restart the server to use the new key-ring information.

ANR47 05W Detected legacy cloud storage pool credentials, migrating to cloud connection.

Explanation

Starting in version 8.1.13, instead of tracking cloud credentials along with a cloud container storage pool, the cloud credentials will be stored in a connection, which will be referenced by the cloud container storage pool. For cloud container storage pools which were created prior to version 8.1.13, a new connection will need to be created using the existing cloud credentials.

System action

A connection will be created using the cloud credentials stored on the

existing cloud container storage pool.

User response

Look for messages in the activity log indicating the name of the newly created connection. The storage pool will be usable without any further action.

ANR47 06I Cloud storage pool pool name now has an associated connection name connection. The connection now has the cloud credentials which were previously set on the storage pool.

Explanation

Starting in version 8.1.13, instead of tracking cloud credentials along with a cloud container storage pool, the cloud credentials will be stored in a connection, which will be referenced by the cloud container storage pool. For this cloud container storage pool, which was created prior to version 8.1.13, a new connection was created using the existing cloud credentials.

System action

The named connection was created on the server.

User response

In order to update credentials for a cloud container storage pool, either issue UPDATE

STGPOOL specifying the CONNECTION parameter to make the storage pool use a different connection, or issue UPDATE CONNECTION in order to update individual parameters of the connection.

ANR47 07E Import/Loaddb command operation terminated - incomplete input volume list.

Explanation

The list of volumes needed to process the command was incomplete. At least one volume needed for the operation is missing from the end of the list.

System action

The command operation is ended.

User response

Issue the command again and make sure the necessary volumes are included in the volume list.

ANR47 08W Cloud object object name version ID does not match recorded version ID. Expected version ID but was version ID. Will attempt to request the specific version ID from the object storage.

Explanation

Some cloud providers allow for object version tracking. If this is enabled, IBM Storage Protect will track the version IDs for objects written to the object storage. When an object is read, the version ID will be checked and if there is a mismatch from the current version of the object and the version ID saved in IBM Storage Protect, then this message will be surfaced. Under normal conditions, the latest object in the object storage should be the same as the version ID recorded in the IBM Storage Protect database. If there is a mismatch, it could mean that someone has attempted to tamper with the data in the object storage.

System action

IBM Storage Protect will automatically attempt to read the correct version and ensure that the correct data is restored.

User response

Check the object storage to ensure that data is intact and no foul play has occurred.

ANR47 09W **Intervention required to mount volume**
Volume Name on Library Manager Server Server Name.

Explanation

A volume mount is awaiting operator intervention on the

specified library manager server.

System action

The volume mount operation waits for operator intervention.

User response

Refer to the server console and/or activity log on the named library manager server to determine the action that needs to be performed to complete the mount operation.

ANR47 10E **The minimum retention for bucket *bucket name* must be set to zero for IBM Storage Protect to function correctly with WORM retention IBM Cloud bucket. It is currently set to *minimum retention value*.**

Explanation

When using retention (WORM) on IBM Cloud bucket, IBM Storage Protect requires that the minimum retention duration be set to zero on the bucket. If it is not set to zero further errors will result. This is required for test operations that are performed on the bucket.

System action

Incorrect setting is detected and needs to be corrected by user.

User response

In the IBM Cloud settings change the minimum retention duration to zero days.

ANR47 12E **Command: The DEVCLASS parameter is only valid for volume history types DBBACKUP or DBSNAPSHOT.**

Explanation

The command failed because an invalid volume history type was specified for the TYPE= parameter.

System action

The command fails, and server operation continues.

User response

Re-issue the command and specify a valid type value.

ANR47 13E **Command: The "option" string is not valid for the Hex Filespace Field.**

Explanation

The command indicated specifies a value that is not valid for the Hex Filespace parameter.

System action

The server does not process the command.

User response

Reissue the command with a valid entry for the Hex Filespace parameter.

ANR47 17E **command: Replication or recovery of damaged files is not supported by target server due to unsupported transfer method fasp.**

Explanation

Replication recovery operations originating from this server are not allowed because the target replication server does not support fasp as a transfer method.

System action

Processing ends.

User response

Upgrade the target replication server to a level that supports replication recovery using fasp.

ANR47 18W **The repair storage pool process for *stgpool name* on server *this server* from server *other server* is complete. Some extents might not have been repaired. Extents repaired: *extents repaired of extents to repair*. Extents failed: *extents failed*. Extents skipped: *extents skipped*. Amount repaired: *amount repaired of amount to***

repair. Amount failed: *amount failed.* Amount skipped: *amount skipped.* Elapsed time: *elapsed time.*

Explanation

The repair storage pool repair process is complete, but some extents might have been skipped due to if the volume was unavailable. The following list describes the information in the message:

- Extents repaired: indicates the number of extents that were successfully repaired.
- Extents failed: indicates the number of extents that failed to be repaired.
- Extents skipped: indicates the number of extents that were skipped.
- Amount repaired: indicates the number of bytes that were successfully repaired.
- Amount failed: indicates the number of bytes that failed to be repaired.
- Amount skipped: indicates the number of bytes that were skipped.
- Elapsed time: indicates how long the process ran.

User response

Issue the REPAIR STGPOOL command again to ensure that all data extents are repaired.

ANR47 The preview of 19W repair storage

pool stgpool name on server this server from server other server is complete. Some extents might not have been identified as needing repair. **Extents to be repaired: *extents repaired.*** **Amount to be repaired: *amount repaired.***

Explanation

The repair storage pool repair process is complete in preview mode, but some extents might have been skipped due to if the volume was unavailable. The following list describes the information in the message:

- Extents to be repaired: indicates the number of extents to be repaired.
- Amount to be repaired: indicates the number of bytes to be repaired.

ANR47 The repair 20I storage pool process for stgpool name on server this server from server other server is complete. **Extents repaired: *extents repaired of extents to repair.*** **Extents failed: *extents failed.*** **Extents skipped: *extents skipped.*** **Amount repaired:**

amount repaired of amount to repair. Amount failed: *amount failed.* Amount skipped: *amount skipped.* Elapsed time: *elapsed time.*

Explanation

The storage pool repair process is complete. The following list describes the information in the message:

- Extents repaired: indicates the number of extents that were successfully repaired.
- Extents failed: indicates the number of extents that failed to be repaired.
- Extents skipped: indicates the number of extents that were skipped.
- Amount repaired: indicates the number of bytes that were successfully repaired.
- Amount failed: indicates the number of bytes that failed to be repaired.
- Amount skipped: indicates the number of bytes that were skipped.
- Elapsed time: indicates how long the process ran.

ANR47 The preview of 21I repair storage pool stgpool name on server this server from server other server is complete. **Extents to be repaired:**

extents repaired. Amount to be repaired: *amount repaired.*

Explanation

The storage pool repair process is complete in preview mode. The following list describes the information in the message:

- Extents to be repaired: indicates the number of extents to be repaired.
- Amount to be repaired: indicates the number of bytes to be repaired.

ANR47 Session rejected 23E for down level storage agent storage agent name.

Explanation

A down level storage agent attempted to connect to this server. The server can not support all previous versions of the storage agent.

System action

The server will not support connections by storage agents at a specific lower versions of the product. Review the README for an explanation of supported storage agent levels for this server. The storage agent will not startup and will report ANR0454W indicating that it is down level.

User response

None.

ANR47 24E During the backup of node *node (Node id)* *filesystem* *filesystem name (filesystem id)* a deletion activity occurred.

Explanation

During full or incremental backup processing, files were deleted from the file space. The files were not deleted by expiration, but by some other process. DELETE FILESPACE, DELETE VOLUME, AUDIT VOLUME, or some other administrator command can cause files to be deleted. The file space image on the server will not be consistent with the client until an incremental backup is completed for the node.

System action

The server will continue processing.

User response

Perform an incremental backup for the client node.

ANR47 25E *Source file(line number):* Server lock *Locktype*, mode *Lockmode* failed.

Explanation

An internal error occurred in an attempt to obtain a lock during processing.

System action

The activity that generated this error fails.

User response

Retry the process. If the process fails contact your service representative.

ANR47 26I The support module support module has been loaded.

Explanation

The module indicated has been successfully loaded. Operations involving this module may be performed by the server.

System action

Functions which depend on this module may now be performed on the server.

User response

None.

ANR47 28E Server connection to file server *File server name* failed. Please check the attributes of the file server specified during definition of the datamover.

Explanation

The server attempted to connect to a file server. The connection failed because of one of the following possible reasons:

- One of the parameters specified during datamover definition was incorrect: TCP/IP address of the file server, user id, password, TCP/IP port

- File server does not support requested NDMP version
- File server is not accessible
- NDMP server limits the number of opened NDMP sessions
- An unsupported model of the filer server was detected
- If the message specifies address 127.0.0.1 or the address of the server system, the NDMPCONTROLPORT and/or NDMPPORTRANGE options may be set to port numbers or ranges which are already in use.

System action

IBM Storage Protect server backup/restore of the file server fails.

User response

Check if file server is accessible through the network; check each of the attributes specified during datamover definition; check NDMP versions supported by the file server; check the number of open NDMP sessions with the file server, verify that file server model is supported by IBM Storage Protect server. If the server's address is in the message ensure that the ports specified or defaulted for options NDMPCONTROLPORT and/or NDMPPORTRANGE are available for use. Depending on the operating system, the

netstat operating system command may be used to determine in-use port numbers.

ANR47 29E Server connection to file server *File server name* failed. The level of the file server operating system is unsupported by IBM Storage Protect server. Please upgrade the file server to the level of the operating system supported by the server.

Explanation

The IBM Storage Protect server was trying to connect to a file server with an unsupported level of the operating system. The server can establish NDMP connection only to a file server with supported level of the operating system. Please check the following site for supported levels of file server operating systems: <http://www.tivoli.com/storage>

System action

The IBM Storage Protect server backup/restore of the file server fails.

User response

Upgrade the file server to a supported level of the operating system.

ANR47 30E Command: The number of *stgpool type* storage pool

names specified with the parameter name parameter exceeds the maximum number allowed.

Explanation

The number of copy storage pools combined with the number of active-data storage pools for a given primary storage pool is limited to a maximum of three.

System action

The command fails.

User response

Reissue the command, specifying a total of three or fewer storage pool names.

ANR47 Command: The 31E pool type storage pool storage pool name is not defined.

Explanation

A DEFINE STGPOOL or UPDATE STGPOOL command contained a storage pool that is not defined as either a copy storage pool or an active-data storage pool.

System action

The command fails.

User response

Verify that the copy or active-data storage pool name stated in the error message is correct. If using

the COPYSTGPOOLS parameter, correct the problem by using a copy storage pool that already exists or define the copy storage pool. If using the ACTIVEDATAPOOLS parameter, correct the problem by using an active-data storage pool that already exists or define the active-data storage pool. Retry the command.

ANR47 Command: 32E Storage pool stgpool name is not a valid storage pool for this command.

Explanation

A DEFINE STGPOOL, UPDATE STGPOOL, or RESTORE STGPOOL command contained a storage pool name that is not valid within the context of the command.

System action

The server does not process the command.

User response

To resolve the issue, complete the following steps:

- 1. Verify that the name of the storage pool was correctly specified in the command. If the name was incorrect, enter the correct name.
- 2. If you specified the COPYSTGPOOLS parameter, ensure that the specified copy storage pool exists. If it does not, define the copy storage pool.
- 3. If you specified the ACTIVEDATAPOOLS

parameter, ensure that the specified active-data storage pool exists. If it does not, define the active-data storage pool.

- 4. If you specified the PROTECTLOCALSTGPOOLS parameter, ensure that the specified container-copy storage pool exists. If it does not, define the container-copy storage pool.
- 5. Retry the command.

ANR47 Command: The 33E pool type storage pool contains a pool type storage pool name that introduces a cycle into the storage pool chain.

Explanation

A DEFINE STGPOOL or UPDATE STGPOOL command contained a copy or active-data storage pool that eventually points to the storage pool being processed.

System action

None.

User response

Remove the storage pool name from the copy or active-data storage pool list and retry the command.

ANR47 The pool type 34W storage pool pool name was removed from the storage pool list because of a failure for

session Session Id.

Explanation

The named storage pool was removed from the storage pool list for the current session backup/archive/space management operation because of an error. This removal is only for the session indicated in the message and does not effect other session operation.

System action

None.

User response

The error that occurred could be one of many failure. Look for the following items in the active log or on the server console. 1. Is the named storage pool currently unavailable? 2. Have any I/O error occurred on the destination devices (disk or tape drives)? 3. Is the mount limit on the device class correctly set? 4. Is the node's MAXNUMMP value sufficient to satisfy the request?

ANR47 Server-free 35W processing is not available. Initialization failed.

Explanation

An error occurred while initializing server-free processing. Server-free data transfer is not available to backup and restore images.

System action

Client backup and restore image requests will use lan-based data transfer.

User response

Check for messages during server initialization and correct the error.

ANR47 36E *Command: The number of container-copy type storage pool names specified with the **parameter name** parameter exceeds the maximum number allowed.*

Explanation

The number of container-copy storage pools for a given primary storage pool is limited to a maximum of two.

System action

The command fails.

User response

Reissue the command, specifying a total of two or fewer storage pool names.

ANR47 37E *Transaction failed for session **session number** for node **node name** (**client platform**) - the copy continue attribute for storage pool **storage pool name** prevented further retries.*

Explanation

During a backup session one or more copy storage pools associated with the indicated storage pool had a failure. The operation was halted because the copy continue option for the indicated storage pool caused the process to stop.

System action

None.

User response

Verify the following:
1. Does the device class(es) have enough mount points to satisfy the request?
2. Was the node's MAXNUMMP value sufficient to satisfy the request?
3. Were there any errors reported during the transaction regarding I/O or related issues?

ANR47 38E *Command: One or more storage pools use **pool name** as a copy, active-data, or container-copy type storage pool.*

Explanation

The DELETE STGPOOL command attempted to delete a storage pool that is defined as a copy storage pool, active-data storage pool, or container-copy storage pool for another primary storage pool.

System action

The server does not process the command.

User response

If necessary, issue the UPDATE STGPOOL command to update the other primary storage pool. Use the COPYSTGPools, ACTIVATEDATAPOOLS, or PROTECTLOCAL parameter to remove the reference to the storage pool to be deleted. Repeat for all primary storage pools that reference the storage pool to be deleted. Reissue the command.

ANR47 39E *Either the high-level address (**hladdress**), low-level address (**lladdress**), or both were entered in error.*

Explanation

The high-level or low-level addresses supplied are incorrect.

System action

The server does not process the command.

User response

Both the high-level address and low-level address are required for an address to be valid. For an update, both high-level address and low-level address are required for the update to succeed. For a new definition, both high-level address and low-level address are required when SESSIONINIT=SERVERONLY. Either the high-level address or low-level address is missing from

this command. Issue the command again and supply the missing address represented by a "?" in this message.

ANR47 40W *Either the high level address, low level address, or both were never entered for the specified node(**nodename**) and the session initiation status is being changed.*

Explanation

When the session initiation status of a node is changed by using the SESSIONINIT parameter on the UPDATE NODE command, the scheduling table is updated to reflect the address specified with HLA and LLA keywords of the UPDATE NODE command. If one or both of these keywords have never been used to provide addressing information for the node, server-initiated scheduling will not be able to contact this node.

System action

The server does not update the scheduling table. Subsequent server initiated sessions with the node are likely to fail, unless an additional UPDATE NODE command provides both the HLADDRESS and LLA parameters with correct address information.

User response

Both the high level address and low level address are required for an address to be valid. Issue the UPDATE NODE command for this node with complete addressing information through the HLADDRESS parameter for the node address, and the LLADDRESS parameter for the node listen port information.

ANR47 41W This command will rename administrator *adminName*. This administrator has defined or updated schedules. Renaming this administrator will cause these schedules to fail.

Explanation

A RENAME ADMINISTRATOR command has been entered for an administrator that owns administrative schedules. If you confirm that you want to proceed with this command, the schedules owned by this administrator will fail when executed in the future.

System action

The system asks whether you wish to continue with the command.

User response

To process the RENAME ADMINISTRATOR command, enter 'Y' to

continue or 'N' to stop the process. To deal with schedules owned by the administrator, use the QUERY SCHEDULE command, or an SQL SELECT statement on the ADMIN_SCHEDULES table to determine which schedules were last updated by the administrator. Use the UPDATE SCHEDULE command to update those schedules controlled by an administrator that has authority to execute them, or use the DELETE SCHEDULE command to remove the schedules.

ANR47 42W This command has renamed administrator *adminName* to *newAdminName*. This administrator has defined or updated schedules. This will cause these schedules to fail in the future.

Explanation

A RENAME ADMINISTRATOR command has been entered and the administrator renamed owns the administrative schedules. The schedules will fail when executed in the future because they do not belong to the administrator's new name.

System action

The system renames the administrator.

User response

Use the QUERY SCHEDULE command or an SQL SELECT statement on the ADMIN_SCHEDULES table to determine which schedules were last updated by the administrator. Use the UPDATE SCHEDULE command to update those schedules controlled by an administrator that has authority to execute them, or use the DELETE SCHEDULE command to remove the schedules.

ANR47 43W An insufficient number of mount points are available in device class *device class name*.

Explanation

During simultaneous write processing, the server cannot allocate sufficient mount points for the specified device class. Possible reasons include:

- The mount limit specified for the device class does not provide a sufficient number of mount points to support the simultaneous write operation.
- The drives that service the device class are inaccessible.

System action

None.

User response

Ensure that:

- The mount limit specified for the device class provides a sufficient number of mount points to support the simultaneous write operation.
- Enough drives are defined and on-line for the library that services the device class.

ANR47 44W The server cannot acquire a sufficient number of mount points.

Explanation

During simultaneous write processing, the server cannot acquire a sufficient number of mount points to satisfy the request.

System action

None.

User response

Examine error messages that might have been displayed prior to, and after this message. Correct any problems, if possible.

ANR47 45W If you set dissimilar policies on the source and target servers, replicated backup objects in a RETAINED state might be deleted from target server *target server name*.

Explanation

If you set dissimilar policies for long-term

data retention on the source and target servers, replicated backup objects that are in a RETAINED state and are not in a retention set on the target server are deleted according to expiration policies.

System action

The system prompts you to continue or to cancel the process.

User response

To set dissimilar policies on the source and target servers, enter 'Y'. Otherwise enter 'N'.

ANR47 46E Session rejected for up level storage agent storage agent name.

Explanation

An up level storage agent attempted to connect to this server. The storage agent can not be at higher level than the server.

System action

The server will not support connections by storage agents at a higher version, at the same version with a higher release, or at the same version and release with a higher modification level. The storage agent will not startup and will report ANR0454W indicating that no resources are available.

User response

None.

ANR47 47W The web administrative

interface is no longer supported. Begin using the Integrated Solutions Console instead.

Explanation

The web administrative interface is no longer supported. It has been replaced by an administrative interface based on the Integrated Solutions Console.

System action

The web administrative interface's web page is not displayed.

User response

Install the IBM Storage Protect support for the Integrated Solutions Console and begin using it to manage your servers.

ANR47 48E A NAS operation requiring NDMP Version 4 was attempted for file server File server name , however the current NDMP session uses NDMP Version 3. Please verify that file server supports NDMP version 4.

Explanation

A NAS operation which requires NDMP Version 4 was attempted for a file server that is currently configured to run NDMP Version 3.

System action

The IBM Storage Protect server backup/restore or other operation on the file server fails.

User response

Verify that the file server supports NDMP Version 4. Verify that the file server is configured to accept connections using NDMP Version 4.

ANR47 49I Key-ring filename and password have been deleted from the server database.

Explanation

The key-ring filename and password have been deleted. Upon restart the server will attempt to generate a new password and new keyring file if options SSLTCPPOINT or SSLTCPADMINPORT are set and the keyring files cert.kdb,cert.crl,cert.rdb do not exist.

System action

None.

User response

Before restarting the server you should delete the corresponding cert.kdb,cert.crl,cert.rdb and cert.arm files from the server execution directory if they exist. Restart the server to generate and use the new key-ring information.

ANR47 52I REPAIR STGVOL process process number started for number of

**volumes
volumes.**

Explanation

The REPAIR STGVOL process has been started as the reported process number. This will evaluate and if needed repair the indicated number of volumes.

System action

None.

User response

This process may be monitored using the QUERY PROCESS command. If this process needs to be cancelled, issue the CANCEL PROCESS command.

ANR47 53E REPAIR STGVOL process process number ended, processed volumes processed of total volumes total volumes with repaired volumes repaired and failed volumes failures.

Explanation

The REPAIR STGVOL process has ended. It processed *volumes processed* out of *total volumes* total volumes to be processed. The *repaired volumes* indicates the number of volumes that needed database repairs and were repaired. The *failed volumes* are volumes that either failed during evaluation or during

database repair if it was needed.

System action

None.

User response

If there were *failed volumes*, review the activity log for more information about the failure.

ANR47 REPAIR STGVOL 54I process process number ended, processed volumes processed of total volumes total volumes with repaired volumes repaired.

Explanation

The REPAIR STGVOL process has ended. It processed *volumes processed* out of *total volumes* total volumes to be processed. The *repaired volumes* indicates the number of volumes that needed database repairs and were repaired.

System action

None.

User response

None.

ANR47 REPAIR STGVOL 55W process process number ended, processed volumes processed of total volumes total volumes with repaired

volumes repaired.

Explanation

The REPAIR STGVOL process has ended. It processed *volumes processed* out of *total volumes* total volumes to be processed. The *repaired volumes* indicates the number of volumes that needed database repairs and were repaired.

System action

None.

User response

If the *volumes processed* is less than the *total volumes*, this may be because the process was cancelled before it could process all the needed volumes. Review the activity log to determine if this is the case and re-issue the command to complete this processing. Or if volumes were reclaimed or deleted while this process was running, there may have been fewer actual volumes to process than what was calculated when the process started. If this is the case no further action is necessary.

ANR47 REPAIR STGVOL 57I finished evaluating volume volume name, no repair was needed.

Explanation

The REPAIR STGVOL finished evaluating *volume name* volume. No

repair actions were taken for the database because there were no errors detected.

System action

None.

User response

None.

ANR47 REPAIR STGVOL 58W repaired volume volume name, database reference errors were found and corrected.

Explanation

The REPAIR STGVOL evaluated *volume name* volume and determined that repair actions were needed. The necessary repairs were done successfully.

System action

None.

User response

None.

ANR47 REPAIR STGVOL 59E failed to process volume volume name.

Explanation

The REPAIR STGVOL failed for *volume name* volume. This process either failed while evaluating this volume or it had determined that repair actions were needed and it failed performing those actions.

System action

None.

User response

Review the activity log for an indication of why processing for this volume failed. Try issuing "REPAIR STGVOL VOLNAME=*volume name*" to process this volume again. If this volume was deleted from the server, this message can be ignored.

ANR47 REPAIR STGVOL 60I reset processing history.

Explanation

The REPAIR STGVOL command was issued with RESET=YES. This resets the processing history. Resetting the processing allows the command to be rerun and causes previously evaluated volumes to be re-evaluated.

System action

None.

User response

An administrator may want to periodically reset the processing history and re-evaluate all volume in the server as a means of validating the server database.

ANR47 REPAIR STGVOL 61E reset processing history failed.

Explanation

The REPAIR STGVOL command was issued with RESET=YES. This resets the processing history. However, the reset of the processing history failed.

System action

None.

User response

The server is likely out of memory or resources. This command should be re-issued after either halting and restarting the server or after halting the server, rebooting the server machine, and then restarting the server. If the reset still fails after these steps, contact your IBM service representative.

ANR47 62E Command: The SPACEMANAGED or ARCHIVE type parameters are not valid for active data storage pool volumes.

Explanation

The QUERY CONTENT server command has been entered with an invalid type parameter. The SPACEMANAGED or ARCHIVE parameters are not valid when the volume specified belongs to an active-data type storage pool.

System action

The server ignores the command.

User response

Reissue the command with correct TYPE parameter for active data storage pool.

ANR47 63E Command: Invalid parameter - parameter.

Explanation

The specified server command has been entered with an invalid parameter that is not applicable when using z/OS Media library for sequential FILE storage.

System action

The server ignores the command.

User response

Reissue the command and enter the proper syntax. Neither NUMBEROFVOLUMES nor FORMATSIZE parameter is valid when using z/OS Media library for sequential FILE storage. The z/OS Media server formats each FILE volume as it is being filled.

ANR47 64E Command: Invalid length for parameter parameter - parameter value.

Explanation

The length for (*parameter value*) specified for the (*parameter*) parameter in command *command* exceeds the maximum allowed length.

System action

The command fails and server operation continues.

User response

Reissue the command and specify a valid length for the parameter.

ANR47 65I The key-ring file password was set. Restart the server to use the new password.

Explanation

The password that is used by the server for the key-ring file was set to a value that was specified in the SET SSLKEYRINGPW command. This is typically done after the key-ring file's password is changed using an external utility.

System action

None.

User response

Restart the server to use the new key-ring file password.

ANR47 66E The server could not access the key-ring file using the password specified in the SET SSLKEYRINGPW command.

Explanation

The password used by the server for the key-ring file was checked for validity but was not valid.

System action

None

User response

The QUERY SSLKEYRINGPW command will show you the key-ring file password that the server

is currently using. If the password was changed with an external utility, ensure that the password is the same as that which was specified in the SET SSLKEYRINGPW command. If the password was lost, issue the DELETE KEYRING command to delete the current key-ring file. When you restart the server it will generate a new key-ring file, password, and self-signed certificate. Issue the QUERY SSLKEYRINGPW command to obtain the new password. Then use an external utility to import additional certificates again and designate one as the new default. Restart the server to use the additional certificates.

ANR47 67E The server was unable to change the key-ring file password using the new password specified on the SET SSLKEYRINGPW command along with the old password that the server has stored.

Explanation

The previous key-ring file password remains in effect.

System action

None

User response

The QUERY SSLKEYRINGPW command will display the key-ring file password that the server is currently using. If the SET SSLKEYRINGPW password UPDATE=YES command is unable to update the key-ring file password, the key-ring file and its password can be deleted and re-created by: 1. Issuing the DELETE KEYRING command to delete the server's record of the key-ring file and password. 2. Stopping the server. 3. Deleting files cert.* in the server's instance directory. 4. Restarting the server so that the key-ring file and its password are regenerated by the server.

ANR47 Command: 68E Invalid volume name - volume name.

Explanation

The command indicated contains an invalid FILE volume name for a ZOSMEDIA library volume.

System action

The server does not process the command.

User response

Reissue the command with a valid volume name that does not exceed 44 valid characters.

ANR47 Command: Alert 69W trigger is already defined for message number.

Explanation

A DEFINE ALERTTRIGGER command has been entered that specifies a message number that is already defined with the server.

System action

The server skips the message number and continues processing the command.

User response

Use the UPDATE ALERTTRIGGER command to update the alert trigger if needed.

ANR47 Command:Invalid 70W d message number message number.

Explanation

The message number is invalid because the message number is in an incorrect format or does not exist on the server.

System action

The server skips the specified message number and continues to process the rest of the command.

User response

Verify that the format of the message number is correct and exists on the server. Reissue the command specifying the correct message number.

ANR47 Command: Administrator 71W admin name cannot be

processed because it is not registered or is locked.

Explanation

This command cannot be processed for the indicated administrator name. The administrator name is not registered or is locked.

System action

The indicated administrator name is not processed. The server continues to process the other administrator names specified with the command.

User response

If the administrator name was specified incorrectly, reissue the command with the correct name. If the administrator name is locked, determine if it can be unlocked. Use the UNLOCK ADMIN command to unlock it, and reissue the command specifying the administrator name.

ANR47 Alert trigger 72I message number defined.

Explanation

The requested alert trigger has been added to the server in response to the command.

System action

None.

User response

None.

ANR47 Alert trigger 73I message number deleted.

Explanation

The requested alert trigger has been deleted from the server.

System action

None.

User response

None.

ANR47 Command 74I command processed.

Explanation

The specified command was processed.

System action

None.

User response

Review previous messages. Correct the problem and reissue the command.

ANR47 Command: Alert 75W trigger message number is not defined.

Explanation

The specified message number does not refer to a defined alert trigger in the server database.

System action

The server skips the specified message number and continues to process the rest of the command.

User response

Reissue the command specifying a message number that is defined as an alert trigger. Issue the QUERY ALERTTRIGGER command to display a list of defined message numbers.

ANR47 Command:
76I Administrator
admin name for
message number
is action.

Explanation

The command has performed the action and added or deleted the administrator name successfully for the specified alert trigger.

System action

None.

User response

None.

ANR47 Command:
77I Administrator
admin name is
already defined
to alert message
number.

Explanation

The command specifies an administrator name already defined to the alert.

System action

The server skips the administrator name and continues processing the command.

User response

None.

ANR47 Command: Alert
78E alert identifier
could not be
found.

Explanation

The specified alert was not found in the server database.

System action

The specified alert identifier is skipped. The server continues to process the next alert identifier that is specified in the command.

User response

Reissue the command, specifying an alert identifier for an alert that has not been closed or deleted on the server. To display a list of existing alerts, issue the QUERY ALERTSTATUS command.

ANR47 Command: The
79E requested
update for alert
id, alert
identifier, is
invalid. The
alert is not
changed.

Explanation

The specified update request is invalid or not correct for the alert. You can change the status of an alert from active to inactive or closed, or, from inactive to closed. If you are specifying the ASSIGNED or RESOLVEDBY parameters the value must be a registered administrator name that is not locked.

System action

The server does not process the command.

User response

Reissue the command specifying a valid status for the alert. Issue the QUERY ALERTSTATUS command to display a list of existing alerts and status.

ANR47 Node group
80I node group
name defined.

Explanation

A DEFINE NODEGROUP command has created the node group indicated.

System action

None.

User response

None.

ANR47 Command:
81E Invalid node
group name -
node group
name.

Explanation

Server processing for the command *command* fails because the node group name *node group name* specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a node group name that conforms to the name requirements.

ANR47 Command:
82E Description
exceeds
maximum
length of length
limit characters.

Explanation

Server processing for the command *command* fails because the description specified is longer than the *length limit* number of characters allowed.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a shorter description.

ANR47 Command: Node
83E group node
group name is
not defined.

Explanation

Server processing for the command *command* fails because the node group name *node group name* specified does not refer to a defined node group in the server database.

System action

Database changes for the command are rolled back and server operation

continues. The command is not successful in changing the server database.

User response

Issue the command again, specifying a node group name that is defined in the server database. For a list of the names of defined node groups in the server database, issue the QUERY NODEGROUP command.

ANR47 Node group 84I node group name updated.

Explanation

In response to the UPDATE NODEGROUP command, the node group *node group name* has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR47 Node group 85I node group name deleted.

Explanation

In response to the DELETE NODEGROUP command, the node group *node group name* has been deleted from the server database.

System action

Server operation continues.

User response

None.

ANR47 Command: Node 86E group node group name still contains at least one node.

Explanation

Server processing for the delete command *command* fails because the node group *node group name* specified refers to a node group that still contains at least one node. A node group cannot be deleted if one or more client nodes are still assigned to the node group.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To remove remaining nodes from the node group, issue the DELETE NODEGROUPMEMBER command. After all nodes are removed, issue the delete command again.

ANR47 Command: 87I number of nodes members defined in the node group node group name.

Explanation

A DEFINE NODEGROUPMEMBER command has created the specified number of

members in the indicated node group.

System action

None.

User response

None.

ANR47 Command: 88I number of nodes members deleted from node group node group name.

Explanation

A DELETE NODEGROUPMEMBER command has deleted the specified number of members from the indicated node group.

System action

None.

User response

None.

ANR47 Node node name 89I associated to node group node group name.

Explanation

This message is displayed in response to the DEFINE NODEGROUPMEMBER command. Node *node name* is associated with the node group name *node group name*.

System action

Server operation continues.

User response

None.

ANR47 Node node name 90I disassociated from node group node group name.

Explanation

This message is displayed in response to the DELETE NODEGROUPMEMBER command. Node *node name* is no longer associated with the node group name *node group name*.

System action

Server operation continues.

User response

None.

ANR47 Command: Node 91E group node group name is already defined.

Explanation

Server processing for the command *command* fails because the node group name *node group name* specified refers to a node group that is already defined in the server database.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again, specifying a node group name that is not

defined in the server database. For a list of the names of defined node groups in the server database, issue the QUERY NODEGROUP command.

**ANR47 NDMP Tape
92E server unable to
initialize due to
error in
LISTENing on
port Port**

Explanation

The server failed in attempting to listen for session requests on the server's internal tape server.

System action

Server operation continues, but NDMP operations may fail.

User response

Ensure that the NDMPCONTROLPORT option defaults to or is set to a port number which is available in the system. The QUERY OPTION command can be used to determine the port number associated with the NDMPCONTROLPORT option. If this value requires change, the server will have to be restarted after setting the option in the server options file.

**ANR47 NDMP Tape
93E server is
terminating due
to an error in
accepting a new
session on Port
Port**

Explanation

The server failed in attempting to accept a new session on the server's internal tape server.

System action

Server operation continues, but NDMP operations may fail.

User response

Ensure that the NDMPCONTROLPORT option defaults to or is set to a port number which is available in the system. The QUERY OPTION command can be used to determine the port number associated with the NDMPCONTROLPORT option. If this value requires change, the server will have to be restarted after setting the option in the server options file.

**ANR47 The NAS file
94E server File
server name
failed to open
an NDMP data
connection to
the IBM Storage
Protect tape
server. Please
verify that the
file server is
capable of
outbound data
connections.**

Explanation

During a NAS filer-to-server backup operation the data connection from the file server to the IBM Storage Protect server failed. This may occur because a firewall exists between the file server

and the IBM Storage Protect server and is preventing outbound network connections on the file server. This may also occur if the network configuration of the system running the IBM Storage Protect server is reporting an invalid TCP/IP host address, for example "127.0.0.1".

System action

The IBM Storage Protect server backup operation on the file server fails.

User response

Verify that the NAS file server is capable of starting outbound network connections to the IBM Storage Protect server. Verify that the file server supports NDMP 3-way operations. Verify that the network configuration of the system running the IBM Storage Protect server is reporting a valid TCP/IP host address. .

**ANR47 The IBM Storage
95E Protect tape
server failed to
open an NDMP
data connection
to the NAS file
server File
server name .**

Explanation

During a NAS filer-to-server restore operation the data connection from the IBM Storage Protect server to the NAS file server failed. This may occur if the NAS file server is not properly configured to support NDMP 3-way restore operations.

System action

The IBM Storage Protect server restore operation on the file server fails.

User response

Verify that the file server supports NDMP 3-way restore operations. .

**ANR47 The IBM Storage
96E Protect tape
server failed to
open a listening
socket for
accepting an
NDMP data
connection from
a NAS file server
using the
network
interface
network host
name .**

Explanation

During a NAS filer-to-server backup operation the IBM Storage Protect tape server failed to open a TCP/IP socket in order to listen for NDMP data connections from a NAS file server. This may occur if the network interface chosen for NDMP data connections is not running or does not support IP Version 4.

System action

The IBM Storage Protect server backup operation of the file server fails.

User response

Verify that the network interface specified in the NDMPPREFDATAINTERFACE server option is properly configured and running. .

ANR47 97E Drive *driveName* is missing path information. Please check that all related paths are defined properly.

Explanation

A drive does not have sufficient path information for the operation to complete. This is typically due to a path not being defined.

System action

The server fails the storage operation.

User response

Verify that all applicable paths are defined for the drive. Also verify that the information contained in the paths is correct.

ANR47 98E Command: The *parameter* cannot be specified because multifactor authentication (MFA) is not enabled.

Explanation

The parameter can be specified only if multifactor authentication is enabled.

System action

Server operation continues.

User response

Reissue the command with the

MFREQUIRED=YES parameter setting.

ANR47 99I The AUDIT CONTAINER (Orphaned Extent Identification) process started for storage pool *stgpool name* (process ID *process ID*).

Explanation

As the result of an AUDIT CONTAINER command that specified scan action for the storage pool shown, the process whose ID is displayed has begun checking the contents of the storage pool for orphaned extents.

System action

The contents of the storage pool will be scanned, and objects not listed in the database as valid extents will be marked as orphaned.

User response

None.

ANR48 00W Cloud endpoint *endpoint* is not connecting to any services. The specified endpoint will not be used for the next hour.

Explanation

Connections can fail for different reasons. For example, the specified URL for the endpoint might be invalid.

System action

If available, another endpoint will be used to connect to services. Any endpoints that fail are not used for the subsequent hour.

User response

Resolve any known issues with the specified endpoint. If the URL is invalid, issue the UPDATE STGPOOL command with a valid value for the CLOUDURL parameter. For example, if the name of the cloud-container storage pool is STGPOOL2 and a valid URL is http://123.234.123.234:5000/v2.0, issue the following command:
update stgpool stgpool2 cloudurl=http://123.234.123.234:5000/v2.0

ANR48 01W The storage rule *name* storage rule did not start any storage processes because the storage rule is not active.

Explanation

The storage rule that is specified is not active and cannot start any storage processes.

System action

None.

User response

To start the storage rule process, issue the UPDATE STGRULE

command and specify the ACTIVE=YES parameter.

ANR48 02I Password expiration period for node *node name* has been reset.

Explanation

The node's password expiration period has been reset to the common password expiration period.

System action

None.

User response

None.

ANR48 03I Password expiration period for administrator *administrator name* has been reset.

Explanation

The administrator's password expiration period has been reset to the common password expiration period.

System action

None.

User response

None.

ANR48 04I Node *node name* already uses the common password expiration period.

Explanation

The node's password expiration period is currently set to the common password expiration period.

System action

None.

User response

None.

ANR48 05I Administrator *administrator name* already uses the common password expiration period.

Explanation

The administrator's password expiration period is currently set to the common password expiration period.

System action

None.

User response

None.

ANR48 06I The *storage rule name* storage rule did not start any storage processes because the source storage pools did not have any eligible objects to process.

Explanation

The source storage pools do not have any eligible objects to process.

System action

None.

User response

Ensure that objects are eligible for processing. If the storage rule action type is TIERBYAGE, issue the UPDATE STGRULE command and specify a lower value for the TIERDELAY parameter.

ANR48 07W The server is unable to reset administrator *name* password expiration period to the common password expiration period.

Explanation

The administrator's password expiration period could not be reset to the common password expiration period at this time.

System action

None.

User response

Attempt to reset the node's password expiration period at a later time.

ANR48 08W The password expiration period for all administrators and nodes has been reset to the common password expiration period.

Explanation

All administrators not managed by a profile and nodes on this server have had their password expiration period reset to the common password expiration period.

System action

None.

User response

None.

ANR48 09E Cloud storage pool *cloud storage pool* requires a storage pool directory for backups to local storage.

Explanation

Client backups to target cloud storage pools require an attached storage pool directory.

System action

None.

User response

Define a storage pool directory on the specified cloud storage pool.

ANR48 10W Cloud storage pool *cloud storage pool* does not have a storage pool directory attached.

Explanation

The specified cloud storage pool does not have a storage pool directory attached. Subsequent backups to

this cloud storage pool will fail until you define a storage pool directory for this pool.

System action

None.

User response

Define a storage pool directory on the specified cloud storage pool.

ANR48 11I The preview of the storage pool *storage pool name* encryption is complete. Data extents to be encrypted: *encrypted_data_extents*. Amount to be encrypted: *amount encrypted*.

Explanation

The storage pool encryption process is complete in preview mode. The following list describes the information in the message:

- Data extents to be encrypted: indicates the number of data extents to be encrypted.
- Amount to be encrypted: indicates the number of bytes to be encrypted.

ANR48 12W The storage pool encryption process for *storage_pool_name* is complete. Some data extents might not be encrypted. Encrypted data extents: *encrypted_data_*

extents of data extents to encrypt. Failed data extents: data extents failed. Skipped data extents: data extents skipped. Amount of encrypted data: amount encrypted of amount to encrypt. Amount of failed data: amount failed. Amount of skipped data: amount skipped. Elapsed time: elapsed time.

Explanation

The storage pool encryption process is complete, but some data extents might have been skipped. The following list describes the information in the message:

- Encrypted data extents: indicates the number of data extents that were successfully encrypted.
- Failed data extents: indicates the number of data extents that failed to be encrypted.
- Skipped data extents: indicates the number of data extents that were skipped.
- Amount of encrypted data: indicates the number of bytes that were successfully encrypted.
- Amount of failed data: indicates the number of bytes that failed to be encrypted.
- Amount of skipped data: indicates the

number of bytes that were skipped.

- Elapsed time: indicates how long the process ran.

User response

Issue the ENCRYPT STGPPOOL command again to ensure that all data extents are encrypted.

ANR48 The storage pool encryption process for storage_pool_name is complete. Encrypted data extents: encrypted_data_extents of data extents to encrypt. Failed data extents: data extents failed. Skipped data extents: data extents skipped. Amount of encrypted data: amount encrypted of amount to encrypt. Amount of failed data: amount failed. Amount of skipped data: amount skipped. Elapsed time: elapsed time.

Explanation

The storage pool encryption process is complete. The following list describes the information in the message:

- Encrypted data extents: indicates the number of data extents that were successfully encrypted.

- Failed Data extents: indicates the number of data extents that failed to be encrypted.
- Skipped data extents: indicates the number of extents that were skipped.
- Amount of encrypted data: indicates the number of bytes that were successfully encrypted.
- Amount of failed data: indicates the number of bytes that failed to be encrypted.
- Amount of skipped data: indicates the number of bytes that were skipped.
- Elapsed time: indicates how long the process ran.

ANR48 Command: 14E Invalid volume name - volume name.

Explanation

The command indicated contains an invalid volume name for a retention pool volume.

System action

The server does not process the command.

User response

Reissue the command with a valid volume name that specifies a retention pool. The specified pool must have a device type which is either 3592, LTO or ECART. If the specified pool was not supposed to be a retention pool, choose a poolname of the correct type.

ANR48 Command: Node 15W group node group name does not have any members.

Explanation

A node group was specified as a parameter value, but the node group has no member nodes. No action can be taken because the node group has no client nodes on which to act.

System action

Command processing continues, but no action is taken on the specified node group.

User response

To resolve the issue, take the following actions:

1. Verify that the correct node group was specified on the command.
2. Optional: To add a node to a node group, issue the DEFINE NODEGROUPMEMBER command.
3. Reissue the command with a valid node group.

ANR48 The connection to the S3 cloud provider the endpoint endpoint failed because there's a significant difference between the server system clock and the endpoint clock. To restore the connection to the S3 cloud provider, the

server system clock must be synchronized with the clock at the endpoint.

Explanation

The connection to the S3 cloud pools failed because there's a significant difference between the server system time and the time at the endpoint. This creates the RequestTimeTooSkewed error from the differing times.

System action

Server operation continues, but the command is not processed.

User response

To resolve the issue, complete the following steps:

1. Resync the IBM Storage Protect server time to the current time.
2. Restart the server.

ANR48 Command 17E *Command: Administrator admin is not allowed to issue this command while the system date is suspect. Correct the system date or use the ACCEPT DATE command to establish the current date as valid.*

Explanation

The server has noted that the current system date is suspect. An admin client session may issue the ACCEPT DATE command to establish the current date as valid. No other commands are allowed until the system date is corrected or the current date is established as valid.

System action

The server will fail the command.

User response

If the current system date is not valid, reset the date. Otherwise, use the ACCEPT DATE command to establish the current date as valid on the server. Reissue the command.

Accepting an invalid date can cause any of the following problems:

- Premature deletion of data
- Excessive retention of data
- Scheduling problems
- Event record problems
- Password expiration problems

ANR48 The text cannot 18E *be formatted and written to the server console. The text is text. Try setting a wider screen width.*

Explanation

For the server command issued, the server is unable to format and

write output in table format to the server console. The line width of some text of the output exceeds the size of the window.

System action

The server will not write the output to the console. The server continues operation.

User response

Increase the width of your window and try the command again.

ANR48 Session session 19E *number for node node name is not authorized to a table of contents session.*

Explanation

A client attempted to work with a table of contents (TOC) session, but the node lacks proper authorization. The server will not perform the request.

System action

The server will not perform the request.

User response

Complete the work using a node with proper authorization.

ANR48 Command The 20E *creation date and creation time are both required to be specified.*

Explanation

The server-free process did not complete due to the target being unreachable.

System action

The server will fail the command.

User response

Reissue the command, specifying both creation date and creation time, or neither of them.

ANR48 Command: The 21E *creation date - date. is not valid*

Explanation

The specified command has been issued with an invalid creation date.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid creation date.

ANR48 Command: The 22E *creation time date is not valid.*

Explanation

The specified command has been issued with an invalid creation time.

System action

Server operation continues, but the command is not processed.

User response

Issue the command with a valid creation time.

ANR48 23E The loading or reading of a table of contents for node *node name*, file space *file space name* failed because sufficient memory is not available.

Explanation

The server ends a table of contents (TOC) loading or reading for the specified node and file space because sufficient memory is not available on the server.

System action

The TOC loading or reading is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR48 24E The loading or reading of a table of contents for node *node name*, file space *file space name* failed because of a lock conflict.

Explanation

The server ends a table of contents (TOC) loading or reading for the specified node and file space

because the requested resource is already in use by another process.

System action

The TOC loading or reading is ended and server operation continues.

User response

Try the operation again at a later time.

ANR48 26E The object for the table of contents is not found in the server for node *node name*, file space *file space name*.

Explanation

The server ends a table of contents (TOC) loading or reading for the object in the specified node and file space, because the server cannot find the object for the TOC.

System action

The TOC loading or reading is ended and server operation continues. The TOC object could be deleted from the server during server expiration or volume deletion operation.

User response

Make sure a correct TOC object is specified.

ANR48 27E The loading of a table of contents for node *node name*, file space *file space name* failed because a

thread resource not available.

Explanation

The server ends a table of contents (TOC) loading for the specified node and file space because sufficient memory is not available for starting additional processes on the server.

System action

The TOC loading is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR48 28E The loading or reading of a table of contents for node *node name*, file space *file space name* failed because an internal server error was detected.

Explanation

The server ends a table of contents (TOC) loading or reading for the specified node and file space because an internal logic error is detected.

System action

The TOC loading or reading is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR48 29E The loading or reading of a table of contents for node *node name*, file space *file space name* failed. The transaction is stopped.

Explanation

An error was detected during transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The table of contents (TOC) loading or reading is ended and server operation continues.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR48 30E The loading or reading of a table of contents for

node *node name*, file space *file space name* failed. Insufficient mount points are available to satisfy the request.

Explanation

The server was unable to allocate sufficient mount points to read the table of contents (TOC).

System action

The TOC loading or reading is ended and server operation continues.

User response

If necessary, make more mount points available.

ANR48 31E The loading or reading of a Table of Contents for node *node name*, file space *file space name* failed. The input volume is already in use.

Explanation

During the TOC loading or reading operation, the requested input volume is already in use by another process.

System action

The TOC loading or reading is ended and server operation continues.

User response

Try the operation again at a later time.

ANR48 32E The loading or reading of a table of contents for node *node name*, file space *file space name* failed. The required volume was not mounted.

Explanation

During the table of contents (TOC) loading or reading operation, a required volume cannot be mounted. The mount request may have been canceled.

System action

The TOC loading or reading is ended and server operation continues.

User response

Try the TOC loading or reading again and make sure the necessary volumes are accessible.

ANR48 33W The loading or reading of a table of contents for node *node name*, file space *file space name* failed. The file was deleted from server storage.

Explanation

During the table of contents (TOC) loading or reading operation the file has been deleted

from server storage by another process before the loading or reading is complete.

System action

The TOC loading or reading is ended and server operation continues.

User response

Contact your administrator to find out if DELETE FILESPACE, DELETE VOLUME, or inventory expiration processes are running; these processes can delete files in server storage during TOC loading or reading.

ANR48 34E The loading or reading of a table of contents for node *node name*, file space *file space name* failed. The data transfer is interrupted.

Explanation

The server ends a table of contents (TOC) loading or reading for the specified node and file space because data transfer to or from data storage was interrupted by an external event.

System action

The TOC reading is ended and server operation continues.

User response

Examine the messages issued prior to this message to determine

why the data transfer was interrupted. Attempt the operation again if the problem can be resolved.

ANR48 35E The reading of a table of contents for node *node name*, file space *file space name* failed. A data integrity error was detected.

Explanation

The server stops reading a table of contents (TOC) for the specified node and file space because a data integrity has been encountered on the server.

System action

The TOC reading is ended and server operation continues.

User response

Examine the messages issued prior to this message and contact your service representative.

ANR48 36E The reading of a table of contents for node *node name*, file space *file space name* failed. There was an error in reading from a device.

Explanation

The server ends a table of contents (TOC) reading for the specified node and file space because an I/O error has been encountered by the

server in reading from a device.

System action

The TOC reading is ended and server operation continues.

User response

Examine the messages issued prior to this message that specify the device that is failing. The server may need to be shut down with a HALT command to correct the hardware problem.

ANR48 37I The loading for the table of contents for node *node name*, file space *file space name* started.

Explanation

The loading for the table of contents (TOC) in the specified node and file space has been started.

System action

The server operation continues.

User response

None.

ANR48 38I The loading for the table of contents for node *node name*, file space *file space name* was successful: total entries loaded *number of entries*.

Explanation

The loading for the table of contents (TOC) in

the specified node and file space has been successfully finished.

System action

The server operation continues.

User response

None.

ANR48 39E The loading for the table of contents for node *node name*, file space *file space name* failed. See previous messages.

Explanation

The loading for the table of contents (TOC) in the specified node and file space has failed.

System action

The TOC loading is ended and the server operation continues.

User response

Examine the messages issued prior to this message to determine the source of the problem.

ANR48 40I The loading for the table of contents for node *node name*, file space *file space name* was cancelled.

Explanation

The loading for the table of contents (TOC) in the specified node and file space has been cancelled by the user.

System action

The TOC loading is ended and the server operation continues.

User response

None.

ANR48 41E The loading for the table of contents for node *node name*, file space *file space name* failed. An invalid object type detected.

Explanation

The loading for the table of contents (TOC) in the specified node and file space failed because the object type given is different than the one in the server database.

System action

The TOC loading is ended and the server operation continues.

User response

Re-try the Table of Contents loading, specifying a valid object type.

ANR48 42E The loading of a table of contents for node *node name* failed. The file space name was not found.

Explanation

The server ends a table of contents (TOC) loading for the specified node because the server could not find the file space

name for the TOC object to be loaded.

System action

The TOC loading is ended and server operation continues.

User response

The file space could be deleted during the TOC loading operation. Issue QUERY FILESPACE command to verify if the file space is deleted. Make sure the correct file space name is specified. You can issue a QUERY FILESPACE to ensure that the file space exists. Re-issue the request with the correct file space name.

ANR48 43I Command: Displayed *number of objects* objects, *number of errors* errors were encountered.

Explanation

QUERY TOC has completed. The number of objects displayed and the error count are displayed.

System action

The QUERY TOC command ends and server operation continues.

User response

If the error count is not equal to 0, examine the object name displayed. The error count represents the number of objects that have their names displayed as '...'. This is

because the conversion from a UTF-8 to a local code page for the file name failed. If this is the case, re-issue the QUERY TOC command with FORMAT=DETAILED. The object name will be displayed in a hexadecimal format when the FORMAT=DETAILED is specified. The file may contain an invalid character and may need to be renamed. A new backup copy has to be made for the renamed file so that the file can be displayed correctly and restored later.

ANR48 Command: The specified table of contents for node node name, file space file space name contains no entries.

Explanation

The specified table of contents (TOC) exists, but it is empty. No entries are displayed.

System action

Server operation continues.

User response

None.

ANR48 The writing of the of the table of contents for node node name, file space file space name failed: a directory path exceeds max characters bytes in length. File: lowLevel name,

NDMP Node ID: node id, NDMP Parent Node ID:Parent id.

Explanation

During a backup of a NAS filesystem, the server received a file history record from the NAS device with a directory path length which exceeded the maximum length supported by IBM Storage Protect. The server is unable to create a TOC for a NAS filesystem which contains directory that is longer than 1024 bytes. If the TOC parameter on the BACKUP NODE command is PREFERRED, the backup continues. If the TOC parameter was YES, the backup fails.

System action

The TOC creation is ended and server operation continues.

User response

If TOC=YES was specified on the BACKUP NODE command, retry the command with TOC=NO.

ANR48 Operation process process ID terminated - The server is unable to create a table of contents for node node name, file space file space.

Explanation

While attempting to create a table of contents (TOC) for the specified node and file space in the

indicated TOC destination pool, a failure occurred.

System action

The operation fails because TOC creation is set to YES.

User response

Look for previous messages giving a specific reason for the failure. Take corrective action as appropriate.

ANR48 command 47W detected an extent on container cntrname that is marked damaged.

Explanation

The extent is skipped during command processing due to it being damaged.

System action

The operation skips the extent and continues processing.

User response

Run an audit container on the container.

ANR48 Container 48E container name is in a container state state and cannot be audited.

Explanation

You cannot audit a container that is in a pending state. You can audit containers that specify one of the following states:

available, unavailable, or readily.

System action

The command fails and server operation continues.

User response

Reissue the command with a different, valid container name.

ANR48 The AUDIT 49I COPYCONTAINER R command process process id completed: delete chunk count damaged chunks deleted.

Explanation

The AUDIT COPYCONTAINER command that specifies the ACTION=REMOVEDAMAGED parameter has completed processing

The following information is displayed:

- The number of damaged chunks deleted.

System action

None.

User response

None.

ANR48 The repair 50W storage pool process for stgpool name on server this server from stgpool name on server other server is complete. Some extents might

not have been repaired. Extents repaired: extents repaired of extents to repair. Extents failed: extents failed. Extents skipped: extents skipped. Amount repaired: amount repaired of amount to repair. Amount failed: amount failed. Amount skipped: amount skipped. Elapsed time: elapsed time.

Explanation

The repair storage pool repair process is complete, but some extents might have been skipped due to if the volume was unavailable. The following list describes the information in the message:

- Extents repaired: indicates the number of extents that were successfully repaired.
- Extents failed: indicates the number of extents that failed to be repaired.
- Extents skipped: indicates the number of extents that were skipped.
- Amount repaired: indicates the number of bytes that were successfully repaired.
- Amount failed: indicates the number of bytes that failed to be repaired.

- Amount skipped: indicates the number of bytes that were skipped.
- Elapsed time: indicates how long the process ran.

User response

Issue the REPAIR STGPOOL command again to ensure that all data extents are repaired.

ANR48 51W The preview of repair storage pool *stgpool name* on server *this server* from *stgpool name* on server *other server* is complete. Some extents might not have been identified as needing repair. Extents to be repaired: *extents repaired*. Amount to be repaired: *amount repaired*.

Explanation

The repair storage pool repair process is complete in preview mode, but some extents might have been skipped due to if the volume was unavailable. The following list describes the information in the message:

- Extents to be repaired: indicates the number of extents to be repaired.
- Amount to be repaired: indicates the number of bytes to be repaired.

ANR48 52W *command* detected

damaged extents on container *cntr name*.

Explanation

The damaged extents are skipped during command processing.

System action

The operation skips the damaged extents and continues processing.

User response

To analyze damaged extents, issue the QUERY DAMAGED command for the specified container.

ANR48 53W During the repair process for container storage pool *pool name*, *skipped extents* extents were skipped.

Explanation

The extents were skipped because an error occurred during the repair process or because a copy of the extents was not available. Extent copies are unavailable if the extents were not replicated and were not protected by using the PROTECT STGPOOL command. If extents were not replicated or protected, extent copies are not available on a target replication server or in a container-copy storage pool.

System action

System operation continues. The server

repairs damaged extents when possible.

User response

No action is required.

ANR48 54E *Command: A* name collision was detected with tape device *device name* and cluster node *parent name*. The tape device will not be defined as a data mover.

Explanation

When you issue the DEFINE DATAMOVER command with the TYPE=NASCLUSTER parameter setting, a name collision can occur. If the NAS tape device name matches the cluster node name, the operation to define the data mover fails.

System action

System operation continues.

User response

Change the name of the NAS tape device or the cluster node to ensure that the names do not match. Then, reissue the DEFINE DATAMOVER command.

ANR48 55I *Command* *command* *subcommand* is no longer supported and there is no direct replacement for this capability.

Explanation

The functions that were provided by this command are no longer necessary.

System action

System operation continues.

User response

Review information about product changes in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR48 Command 56I *command subcommand* is no longer supported. The following commands provide similar functions: *newcommand*. See the IBM Knowledge Center for details on commands, or issue HELP command for the replacement commands.

Explanation

The functions formerly provided by this command are now provided by one or more new commands

System action

System operation continues.

User response

Review information about product changes in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR48 Command 57I *command subcommand* is no longer supported. The following options provide similar functions: *newoptions*. See the IBM Knowledge Center for details on the options or issue the HELP command for the replacement options.

Explanation

The functions formerly provided by this command are now provided by one or more new options

System action

System operation continues.

User response

Review information about product changes in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR48 Option option 58I *name* is no longer supported and there is no direct

replacement for this capability.

Explanation

The functions formerly provided by this option are no longer necessary

System action

System operation continues.

User response

Review information about product changes in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR48 Parameter 59I *parameter name* on the *command command name* is no longer supported.

Explanation

The function that was provided by this parameter is no longer necessary

System action

System operation continues.

User response

Review information about product changes in the product information: (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR48 The correct 60W value of ARCHRETENTION for domain *domain name*

will not be sent to the managed servers. Please upgrade the managed servers to be at least the same level as that of the configuration manager.

Explanation

The configuration manager has an ARCHRETENTION value that is greater than the managed server can manage. This is because the managed server is at a lower level than the configuration manager. The value of the ARCHRETENTION for the indicated domain is set to the maximum value that the managed server can process.

System action

The server operation continues.

User response

To correctly send the value of the ARCHRETENTION to the managed servers, please upgrade the managed servers to at least the same level as that of the configuration manager.

ANR48 The correct 61W value of RETVER for the archive copy group *domain name policy set name mgmt class name cg name* will not be sent to the managed servers. Upgrade the

managed servers to at least the same level as that of the configuration manager.

Explanation

The configuration manager has a RETVER value that is greater than what the managed server can process. This is because the managed server is at a lower level than the configuration manager. The value of the RETVER for the indicated copy group is set to NOLIMIT in the managed server.

System action

The server operation continues.

User response

To correctly send the value of RETVER for the copy group to the managed servers, please upgrade the managed servers to at least the same level as that of the configuration manager.

ANR48 62W The value of the ACTIVEDESTINATION parameter for domain *domain name* will not be sent to the managed server *server name* because the release level of the managed server is earlier than the release level of the configuration manager.

Explanation

The configuration manager has a value for the ACTIVEDESTINATION parameter that contains active-data storage pool names that cannot be managed by the managed server. The problem is that the release level of the managed server is earlier than release level of the configuration manager.

System action

The server operation continues.

User response

Upgrade the managed server to the same release level or later than that of the configuration manager.

ANR48 63W The value of the ACTIVEDESTINATION parameter for domain *domain name* that was received from the configuration manager will not be used on the managed server.

Explanation

The received value of the ACTIVEDESTINATION parameter contains active-data storage pool IDs that cannot be managed by the managed server. The problem is that the release level of the configuration manager is earlier than the release level of the managed server.

System action

The server operation continues.

User response

Upgrade the configuration manager to the same release level or later than that of the managed server.

ANR48 64E The *module name* support module was not loaded.

Explanation

The indicated support module was not loaded.

System action

The server cannot perform functions that require this module.

User response

Restart the IBM Storage Protect server and retry the operation. If the support module does not load, contact your service representative.

ANR48 65W The *server name* has been changed. Windows clients that use "passwordaccess generate" may be unable to authenticate with the server.

Explanation

After the name of an IBM Storage Protect server is changed, the generated password on Windows backup-archive clients is not usable. The password is generated on backup-archive clients

that use "passwordaccess generate". The generated password is not usable because the generated password is stored in the Windows registry in a key that contains the server name, such as the following:
HKLM\SOFTWARE\IBM\ASPM\CurrentVersion\BackupClient\Nodes\<NODE NAME>
\<SERVERNAME>\Password
If the backup-archive client is not able to authenticate with the IBM Storage Protect server then scheduled operations for that client will not run.

System action

Until the password is reset, the Windows backup-archive clients that use "passwordaccess generate" are unable to authenticate with the IBM Storage Protect server.

User response

Either change the IBM Storage Protect server name back to the original name, or reset the password on the server using the UPDATE NODE command to a known password and then use dsm, dsmd, or dsmdutil to manually set the password on all Windows backup-archive clients that use "passwordaccess generate".

ANR48 66I Node *node name* is not a member of a domain that is configured to use active data pool *active data pool name*.

Explanation

The primary storage pool to which the client node will write data is capable of using an active data pool. However the client node is not a member of a domain that is authorized to write to the active data pool.

System action

Data from the node is not written to the active data pool.

User response

If the client node data must be written to an active data pool, move the client node to a domain that is authorized for this action or update the current domain for active data pool processing.

ANR48 67I *Session session number for node node name (client platform) terminated - session retry failed.*

Explanation

The specified client session is ended by the server because a previous error has been detected on the server. Retry attempts were not able to resume the session.

System action

The session is ended and server operation continues.

User response

If the session is a proxied LAN-Free session

for a storage agent, this error might be the result of a mount point or volume preemption on the storage agent. Review the messages logged by the storage agent to determine if a storage agent action caused the error. Review the messages logged by this session to determine alternate causes.

ANR48 68I *Canceling the Database Backup session session number for node node name is not allowed.*

Explanation

The server cannot cancel the session that is specified in the CANCEL SESSION command.

System action

Server operations continue.

User response

Database Backup sessions cannot be cancelled with the CANCEL SESSION command. Issue the CANCEL PROCESS command to terminate the Database Backup operation.

ANR48 69I *The server credentials cannot be authenticated for server server name because the server is not at a required level for authentication with the PING*

SERVER command.

Explanation

For password authentication purposes, the server must be at the current level.

System action

Server operation continues.

User response

No action is required. To ensure that the PING SERVER command can verify server credentials, upgrade a remote V6.3 server to V6.3.5 or later, or a remote V7.1 server to V7.1.1 or later. Remote servers at earlier levels accept the PING SERVER command without verifying credentials.

ANR48 70W *Audit command: Storage pool storage pool name, specified as a Table of Contents (TOC) destination for copy group copy group name in management class management class name, policy set set name, domain domain name, does not exist.*

Explanation

A database audit process finds a storage pool specified for the Table of Contents (TOC) destination of the specified copy group that is not defined in the server database. If this

copy group is used in an active policy set, then the NDMP backup with a TOC creation operation may fail when attempting to put TOC entries in the destination.

System action

Audit processing continues.

User response

After the audit command completes, use the DEFINE STGPOOL command to define the missing storage pool, or the UPDATE COPYGROUP command to update the copy group to refer to an existing storage pool.

ANR48 71I *Collocation group collocation group name defined.*

Explanation

A DEFINE COLLOGROUP command has created the collocation group indicated.

System action

None.

User response

None.

ANR48 72E *Command: Invalid collocation group name - collocation group name.*

Explanation

Server processing for the command *command* fails because the collocation group name *collocation*

group name specified does not contain valid characters or contains too many characters.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a collocation group name that conforms to the name requirements.

ANR48 Command:
73E Collocation group description exceeds maximum length of *length limit* characters.

Explanation

Server processing for the command *command* fails because the collocation group description specified is longer than the *length limit* number of characters allowed.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again and specify a shorter collocation group description.

ANR48 Collocation group collocation group name updated.
74I

Explanation

In response to the UPDATE COLLOGROUP command, the collocation group *collocation group name* has been updated in the server database.

System action

Server operation continues.

User response

None.

ANR48 Collocation group collocation group name deleted.
75I

Explanation

In response to the DELETE COLLOGROUP command, the collocation group *collocation group name* has been deleted from the server database.

System action

Server operation continues.

User response

None.

ANR48 Command: Node node name cannot be processed because it is not registered.
76W

Explanation

This command cannot be processed for the

indicated node. The node is not registered. The other nodes can be processed if specified by the command.

System action

The indicated node is not processed, but other nodes can be processed if specified by this command.

User response

If the node name was entered incorrectly, issue the command again with the correct node name.

ANR48 Command: Collocation group collocation group name is not defined.
77E

Explanation

Server processing for the command *command* fails because the collocation group name *collocation group name* specified does not refer to a defined collocation group in the server database.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again, specifying a collocation group name that is defined in the server database. For a list of the names of defined collocation

groups in the server database, issue the QUERY COLLOGROUP command.

ANR48 Command: number of nodes members defined in the collocation group collocation group name.
78I

Explanation

A DEFINE COLLOCMEMBER command has created the specified number of members in the indicated collocation group.

System action

None.

User response

None.

ANR48 Command: number of nodes members deleted from collocation group collocation group name.
79I

Explanation

A DELETE COLLOCMEMBER command has deleted the specified number of members from the indicated collocation group.

System action

None.

User response

None.

ANR48 80I Node *node name* disassociated from collocation group *collocation group name*.

Explanation

This message is displayed in response to the DELETE COLLOCMEMBER command. Node *node name* is no longer associated with the collocation group name *collocation group name*.

System action

Server operation continues.

User response

None.

ANR48 81E Command: Collocation group *collocation group name* is already defined.

Explanation

Server processing for the command *command* fails because the collocation group name *collocation group name* specified refers to a collocation group that is already defined in the server database.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

Issue the command again, specifying a collocation group name that is not defined in the server database. For a list of the names of defined collocation groups in the server database, issue the QUERY COLLOGROUP command.

ANR48 82E Command: Collocation group *collocation group name* still contains at least one node.

Explanation

Server processing for the delete command *command* fails because the collocation group *collocation group name* specified refers to a collocation group that still contains at least one node. A collocation group cannot be deleted if one or more client nodes are still assigned to the collocation group.

System action

Database changes for the command are rolled back and server operation continues. The command is not successful in changing the server database.

User response

To remove remaining nodes from the collocation group, issue the DELETE COLLOCMEMBER command. After all nodes are removed, issue the delete command again.

ANR48 83I Node *node name* associated to collocation group *collocation group name*.

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command. Node *node name* is associated with the collocation group name *collocation group name*.

System action

Server operation continues.

User response

None.

ANR48 84W Node *node name* already associated to collocation group *collocation group name*.

Explanation

This message is displayed in response to the DEFINE COLLOCMEMBER command. Node *node name* is already associated with the collocation group name *collocation group name*. The indicated node is not processed. The other nodes can be processed if specified by the command.

System action

Server operation continues.

User response

If the node name was entered incorrectly, issue the command again with the correct node name.

ANR48 85E Command: Either node name or collocation group name must be specified.

Explanation

The indicated command failed because neither node name nor collocation group name is specified or the node name and the collocation group name both are specified.

System action

The indicated command fails. The server operation continues.

User response

Issue the command again, by specifying either the node name or the collocation group name.

ANR48 86I Audit command (Scan) process started for container *container name* (process ID *process ID*).

Explanation

As the result of an AUDIT CONTAINER command that specified scan action for the container shown, the process whose ID is displayed has begun auditing the container.

System action

The container is audited and inconsistent data is marked as damaged.

User response

None.

ANR48 87I *Audit command (Remove Damaged) process started for container container name (process ID process ID).*

Explanation

As the result of an AUDIT CONTAINER command that specified delete action for the container shown, the process whose ID is displayed has begun deleting data files depending on damaged data extents in the container.

System action

Data files associated with the damaged data extents in the container are deleted.

User response

None.

ANR48 88I *Audit command (Remove Damaged) process started for storage pool directory stgpooldir name (process ID process ID).*

Explanation

As the result of an AUDIT CONTAINER command that specified delete action for the storage

pool directory shown, the process whose ID is displayed has begun deleting data files depending on damaged data extents on the storage pool directory.

System action

Data files associated with the damaged data extents on the storage pool directory are deleted.

User response

None.

ANR48 89I *Audit command (Remove Damaged) process started for storage pool stgpool name (process ID process ID).*

Explanation

As the result of an AUDIT CONTAINER command that specified delete action for the storage pool shown, the process whose ID is displayed has begun deleting data files dependent on damaged data extents in the storage pool.

System action

Data files associated with the damaged data extents in the storage pool are deleted.

User response

None.

ANR48 90W *Audit container process terminated for deleteion - process process ID canceled.*

Explanation

During processing of an AUDIT CONTAINER command for the container shown, the process performing the audit was canceled.

System action

The AUDIT CONTAINER command is ended.

User response

None.

ANR48 91I *Audit command process process_id ended for the container: container: inspected_extents data extents inspected, damaged_extents data extents marked as damaged, undamaged_extents data extents previously marked as damaged reset to undamaged, and orphaned_extents data extents marked as orphaned.*

Explanation

The audit of the container generated the following information:

- The number of data extents audited
- The number of damaged data extents
- The number of undamaged data extents that were

previously marked as damaged

- For cloud containers, the number of data extents that were present on the cloud service provider but not present in the server database; the audit marked these extents as orphaned

System action

None.

User response

For directory containers, if you backed up the storage pool data to a target storage pool server by using the PROTECT STGPOOL command, you can repair damaged extents in the directory-container storage pool by using the REPAIR STGPOOL command. If you did not use the PROTECT STGPOOL command to back up the storage pool data, you cannot repair damaged extents in the directory-container storage pool.

To remove damaged extents from directory containers or cloud containers, and to remove orphaned extents from cloud containers, issue the AUDIT CONTAINER command and specify the ACTION=REMOVEDAMAGED parameter.

ANR48 92E *Command: Storage pool directory directory is not defined in storage pool stgpool.*

Explanation

A nonexistent storage pool directory is specified for the issued command.

System action

The server does not process the command.

User response

Reissue the command with a valid storage pool directory. If you are using the MACRO command to define and update the storage pool directory, you must ensure that the DEFINE STGPOOLDIRECTORY command is committed before the UPDATE STGPOOLDIRECTORY command is issued.

ANR48 94I Audit Container (Mark Damaged) process started for container *container name* (process ID *process ID*).

Explanation

As the result of an AUDIT CONTAINER command that specified scan action for the container shown, the process whose ID is displayed has begun auditing the container.

System action

The container is audited and inconsistent data is marked as damaged.

User response

None.

ANR48 95E Deduplicated bitfile *bitfile id* on volume

volname has invalid links.

Explanation

While reading a deduplicated bitfile, the server detected invalid deduplication information.

System action

If the operation is a server data movement, the inconsistent bitfile is marked invalid and skipped, but the operation continues. If, however, the operation is a client restore or retrieve, the bitfile is marked as damaged.

User response

If the volume is in a primary storage pool, run a RESTORE VOLUME command to fix the invalid bitfile. If the volume is in a copy storage pool, run a DELETE VOLUME DISCARDATA=YES command to delete the volume, then backup the primary storage pool again.

To see what files may have been marked as damaged, use the QUERY CONTENT DAMAGED=YES command.

ANR48 96I Inventory client file expiration is restarting process *process num* from *startdate*.

Explanation

The server is in the process of restarting

a previously cancelled expiration process.

System action

The server will continue expiring eligible objects.

User response

None.

ANR48 97I Database restore of operation *operation ID* will use device class *device class name* and attempt to use *number of streams* streams.

Explanation

The server restore database process for the operation ID will be performed for the device class and number of streams indicated.

System action

The server performs the database restore operation.

User response

None.

ANR48 98W This is a pre-release *server_version* IBM Storage Protect server (driver *driver_number*, build *build_id*). It is not supported for commercial or production use.

Explanation

The IBM Storage Protect server is running a pre-release program. The program can be used to test or evaluate new features, but it can neither be used for any commercial purpose nor placed into production.

System action

No action is taken.

User response

If the IBM Storage Protect server is being used to evaluate new features, no action is required. If the server will be used in a production environment or for a commercial purpose, contact your IBM sales representative or authorized business partner to obtain a fully-supported, released version.

ANR48 99E The server database was formatted using a pre-release *server_version* IBM Storage Protect server (driver *driver_number*, build *build_id*). The server is not supported for commercial or production use.

Explanation

The server database was created using an unsupported, pre-release version of the IBM Storage Protect server. The server can be used to test or evaluate new features, but it can

neither be used for any commercial purpose nor placed into production.

System action

No action is taken.

User response

If the server is being used to evaluate new features, no action is required. If the server will be used in a production environment or for a commercial purpose, remove the database. Create a new database using a fully-supported, released version.

ANR49 EMC Centera 00W Software Development Kit (SDK) libraries failed to load or are missing.

Explanation

The libraries are required to ensure that the IBM Storage Protect server can operate devices with the defined CENTERA device class.

System action

None.

User response

Ensure that the EMC Centera SDK is installed on the system and that all libraries and associated links have the read permission.

ANR49 01E The server database has been used with a pre-release server_version IBM Storage Protect server

(driver *driver_number*, build *build_id*). The server is not supported for commercial or production use.

Explanation

An unsupported, pre-release version of the IBM Storage Protect has been used with this database. The server can be used to test or evaluate new features, but it can neither be used for any commercial purpose nor placed into production.

System action

No action is taken.

User response

If the server is being used to evaluate new features, no action is required. If the server will be used in a production environment or for a commercial purpose, remove the database. Create a new database using a fully-supported, released version.

ANR49 02I Replication recovery of damaged files attribute set to value.

Explanation

The setting to control replication recovery of damaged files has been turned on or off as indicated with the SET REPLRECOVERDAMAGED command.

System action

If setting the attribute to ON and there are damaged files, the server will evaluate the damaged file inventory. If no damaged files exist in the server inventory, and ON is specified, the attribute will cycle to ON without having to evaluate damaged files. If the setting specifies OFF, the server attribute cycles to OFF immediately.

User response

If setting the attribute to ON and there are damaged files, query the activity log for a process description of SET REPLRECOVERDAMAGED. If the process completes successfully the REPLRECOVERDAMAGED setting will be set ON. If the process is canceled or completes unsuccessfully, the attribute remains unchanged.

ANR49 03I Replication recovery of damaged files for node(s) node list has been initiated on target replication server recovery server via process ProcId.

Explanation

The replication recovery process has started on the target replication server.

System action

A replication recovery process is started on the target replication server.

User response

Examine the results of replication recovery process on the target replication server.

ANR49 04E command: Replication recovery of damaged files is disabled.

Explanation

Replication recovery operations originating from this server are disabled.

System action

Processing ends.

User response

Use the SET REPLRECOVERDAMAGED ON command to enable the use of replication recovery of damaged files.

ANR49 05E command: Replication recovery of damaged files is not supported by target server.

Explanation

Replication recovery operations originating from this server are not allowed because the target replication server is downlevel.

System action

Processing ends.

User response

Upgrade the target replication server to a level that supports replication recovery of damaged files.

ANR49 06W Filespace *filespace name* (fsID=*filespace id*) for node *node name* was skipped during replication due to incompatible parameters.

Explanation

The specified filespace has a replication state of PURGEDATA, which is not compatible with the PURGEDATA=DELETED parameter value for the REPLICATE NODE command.

System action

The filespace is skipped during replication processing.

User response

To resolve the issue, take one of the following actions:

- Reissue the REPLICATE NODE command without specifying the PURGEDATA=DELETED parameter value.
- Change the replication state of the filespace by issuing the UPDATE FILESPACE command and specifying either the REPLSTATE=ENABLED or REPLSTATE=DISABLED parameter value. Then, reissue the REPLICATE NODE command.

ANR49 07W The MAXRUNTIME parameter does not cancel the scheduled command command.

Explanation

The administrative schedule that started the command has a maximum run time. The maximum run time is defined by the MAXRUNTIME parameter in the DEFINE or UPDATE SCHEDULE command. You cannot use the MAXRUNTIME value to cancel the specified command because the command is not associated with a server process number or WAIT=YES is specified. In both of these cases, the value of the MAXRUNTIME parameter is ignored and the scheduled command is not automatically canceled.

System action

The server operation continues.

User response

None.

ANR49 08E Replication recovery of damaged files not able to initiate a replication recovery process on the target replication server. Reason *rc*.

Explanation

The replication recovery process has not started on the target replication server.

System action

None.

User response

Examine the activity log for communication errors.

ANR49 09I No files found for replication recovery of damaged files.

Explanation

The replication recovery process has not started on the target replication server because no damaged files were found for the nodes specified on the REPLICATE NODE command.

System action

None.

User response

None.

ANR49 10I A replication recovery preview was completed for the following nodes: *node list*. Nodes to be recovered: *nodes to recover*. Filespaces to be recovered: *filesystems to recover*. Files to be recovered: *files to recover*. Bytes to be recovered: *bytes to recover*. Estimated run

time: *estimated runtime*.

Explanation

Information is provided about damaged data that can be recovered from a target replication server:

- Nodes to be recovered indicates the number of nodes that require recovery of damaged files.
- Filespaces to be recovered indicates the number of filesystems that require recovery of damaged files.
- Files to be recovered indicates the number of damaged files to be recovered.
- Bytes to be recovered indicates the number of damaged bytes to be recovered.
- Estimated run time is an estimate of how long the recovery process will run.

System action

None.

User response

No action is required. However, to recover damaged files from a target replication server, you must issue the REPLICATE NODE command again. To replicate the node and recover damaged files, specify RECOVERDAMAGED=YES. To run the command for the sole purpose of recovering damaged files, specify RECOVERDAMAGED=ONLY.

ANR49 11E File name is too long, the server is unable to build a table of contents for node *node name*, file space *file space name*, file name *file name*, node identifier *node id*, parent node identifier *parent node id*. Table of contents creation fails.

Explanation

The file name must be 512 bytes or less. If the size is larger than 512 bytes, the IBM Storage Protect server cannot create a table of contents (TOC) for a Network Appliance file server.

System action

The TOC creation fails.

User response

Rename the file with a shorter name. For more information about the file name or the node identifier, including locating and correcting the file or directory, refer to Network Appliance documentation.

Once the problem has been corrected, try the operation again.

ANR49 12I Database restore is in progress. A total of *byte count* bytes have been transferred.

Explanation

A database restore is in progress.

System action

None.

User response

None.

ANR49 13I Audit Container (UnMark Damaged) process started for container *container name* (process ID *process ID*).

Explanation

As the result of an AUDIT CONTAINER command that specified scan action for the container shown, the process whose ID is displayed has begun auditing the container.

System action

The container is audited and damaged data marked undamaged.

User response

None.

ANR49 15I Audit command process started (process ID *process ID*).

Explanation

As the result of an AUDIT CONTAINER command the process whose ID is displayed has begun auditing the containers.

System action

Container audit processes are started.

User response

None.

ANR49 16I Starting point-in-time database restore snapshot to date *date time*.

Explanation

A point-in-time database restore with the TODATE parameter and source snapshot specified has begun. When this restore is complete, the database will be committed to the point in time of this backup.

System action

None.

User response

None.

ANR49 17I Point-in-time database restore with snapshot complete, restore date *date time*.

Explanation

A point-in-time database restore with the TODATE parameter specified has completed. The database is committed to the point in time of this backup, which may be different than the TODATE specified. If this is the case, an additional message will be displayed.

System action

None.

User response

None.

ANR49 18W The filesystem *filesystem name* (*filesystem id*) for node *node name* will not be included in the backupset *backupset name* (data type *data type*) because it was not created by the backup/archive client and cannot be restored from the backupset.

Explanation

Data from the filesystem will not be included in the backupset because the filesystem was not created by the backup/archive client and it cannot be restored from the backupset.

System action

The filesystem is skipped.

User response

None.

ANR49 19W The filesystem *filesystem name* (*filesystem id*) for node *node name* will not be included in the backupset *backupset name* (data type *data type*) because it is not a supported application type.

Explanation

Data from the filesystem will not be included in the backupset because the filesystem does not

belong to a supported application type.

System action

The filesystem is skipped.

User response

None.

ANR49 Command:
20E Administrator administrator name is not authorized to issue this command for storage pool pool name.

Explanation

The specified administrator has entered the indicated command, but this administrator does not have the proper authority necessary to run the command for the indicated pool. The indicated pool could be the storage pool being migrated or being reclaimed, or the storage pool to which files are migrated or reclaimed.

System action

The server does not process the command.

User response

Issue the command from a properly authorized administrator ID, or contact the system administrator to have additional authority granted to the current administrator ID.

ANR49 Command:
21E Primary storage pool pool name does not have a target pool.

Explanation

The specified primary storage pool does not have a target storage pool for the specified operation.

System action

The server does not process the command.

User response

Define a target storage pool for the pool specified on the command and re-issue the command.

ANR49 Command:
22E Migration is currently running for the storage pool pool name.

Explanation

The migration operation is already running for the specified storage pool.

System action

The server does not process the command.

User response

Re-issue the command when migration is not running.

ANR49 Command:
23E Reclamation is currently running for the storage pool pool name.

Explanation

The reclamation operation is already running for the specified storage pool.

System action

The server does not process the command.

User response

Re-issue the command when reclamation is not running.

ANR49 Command:
24I Migration is not needed for the storage pool pool name.

Explanation

Either the current percentage utilization of the specified storage pool is less than the low migration threshold or the number of volumes containing data has not reached the low migration threshold.

System action

The server does not process the command.

User response

Re-issue the command when migration is needed for the pool.

ANR49 Migration process process ID terminated for storage pool storage pool name - duration exceeded.

Explanation

During migration for the indicated storage pool, a process performing the migration has been terminated because the migration duration has exceeded.

System action

The migration process is terminated.

User response

None.

ANR49 Migration terminated for volume volume name - duration exceeded.

Explanation

During migration for the indicated volume, the duration for the migration has been exceeded.

System action

The volume migration is terminated.

User response

None.

ANR49 Reclamation terminated for volume volume name - duration exceeded.

Explanation

During reclamation for the indicated volume, the duration for the reclamation has been exceeded.

System action

The volume reclamation is terminated.

User response

None.

ANR49 The storage-pool migration process was terminated.

Explanation

Because the data in the storage pool is deduplicated, the storage pool is not eligible for migration with the simultaneous-write feature enabled. This means that you cannot migrate a deduplicated storage pool if the AUTOCOPY parameter for the storage pool is set to a value other than NONE.

System action

Server operation continues, but the storage pool is not migrated.

User response

To resolve the issue, complete the following steps: 1. Use the UPDATE STGPOOL command to change the value of the AUTOCOPY parameter to NONE. 2. Restart the storage pool migration process.

ANR49 Command: The storage pool pool name is not a sequential-access pool.

Explanation

The specified storage pool is not a sequential-access storage media for the specified operation. The specified operation only applies to a sequential-access storage media.

System action

The server does not process the command.

User response

Re-issue the command for a sequential-access storage media.

ANR49 Reclamation 30I process process ID started for primary storage pool storage pool name automatically or manually, threshold=threshold value, duration=duration.

Explanation

Because the high reclamation threshold for the storage pool shown has been exceeded, a process has been started to reclaim files from the storage pool. Note: a duration value of None means that the duration is not specified and hence the reclamation runs without duration.

System action

Data is moved from this storage pool to the same pool or to the reclaim storage pool.

User response

None.

ANR49 Reclamation 31I process process ID started for copy storage pool storage pool name automatically or manually, threshold=threshold value, offsiteRclmLimit=limit value, duration=duration.

Explanation

Because the high reclamation threshold for the storage pool shown has been exceeded, a process has been started to reclaim files from the storage pool. Note: a duration value of None means that the duration is not specified and hence the reclamation runs without duration.

System action

Data is moved from this storage pool to the same pool or to the reclaim storage pool.

User response

None.

ANR49 Reclamation 32I process process ID ended for storage pool storage pool name.

Explanation

A reclamation process for the named storage pool ends. This action can occur because the threshold for the storage pool has been reached or because the duration has been exceeded.

System action

None.

User response

None.

ANR49 Space 33I reclamation ended for offsite volume volume name.

Explanation

Space reclamation for the named offsite volume is complete.

System action

None.

User response

None.

ANR49 Offsite 34I reclamation ended for storage pool pool name, Number Processes number of processes, Number Volumes Reclaimed number of volume reclaimed, Elapsed Time seconds seconds.

Explanation

Offsite reclamation ended successfully.

System action

None.

User response

None.

ANR49 The migration of 35I the primary pool name primary storage pool is complete. Number of files migrated: number of migrated files. Number of bytes migrated: number of migrated bytes.

Number of deduplicated migrated bytes: number of migrated dedup bytes. Number of unreadable files: number of unreadable files.

Explanation

Migration processing for the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all migration processes ended successfully.

ANR49 36I The reclamation of the pool name storage pool is complete. Number of files reclaimed: number of reclaimed files. Number of reclaimed bytes: number of reclaimed bytes. Number of reclaimed deduplicated bytes: number of reclaimed dedup bytes. Number of reconstructed files: number of reconstructed files. Number of unreadable files: number of unreadable files.

Explanation

Reclamation processing for the specified storage pool ended with the displayed results.

System action

None.

User response

Examine previous messages to determine whether all reclamation processes ended successfully.

ANR49 37E Command: Reclamation will not run - delete filesystem is currently running.

Explanation

A delete filesystem operation is running. To Avoid the resource contention, reclamation will not run when delete filesystem is running.

System action

The server does not process the command.

User response

Re-issue the command when delete filesystem is not running.

ANR49 38E Command: Administrator administrator name is not authorized to issue this command for target storage pool pool name.

Explanation

The specified administrator has entered the indicated command, but this administrator does not have the proper authority necessary to run the command for the indicated pool. The indicated pool is the pool that to which files are migrated or reclaimed.

System action

The server does not process the command.

User response

Issue the command from a properly authorized administrator ID, or contact the system administrator to have additional authority granted to the current administrator ID.

ANR49 39E Command: The "option" option is not valid for a DISK storage pool.

Explanation

The command indicated specifies an option that is not valid for a DISK storage pool.

System action

The server does not process the command.

User response

Reissue the command with options appropriate for a DISK storage pool.

ANR49 40E Container container name is locked by another operation and

cannot be modified.

Explanation

While attempting to modify the specified container, the IBM Storage Protect was unable to obtain the locks necessary to change it.

System action

The operation fails. Server operation continues.

User response

Wait for conflicting processes and sessions are reduced, and re-issue the command.

ANR49 41E The server is unable to translate the Unicode name while building table of contents for node node name, file space file space name, Unicode name unicode name node identifier node id, parent node identifier parent node id. Table of contents creation fails.

Explanation

While creating a table of contents (TOC) for a Network Appliance file server, the IBM Storage Protect server attempted to translate the Unicode name in the file history message from UCS-2 to UTF-8. The translation failed.

System action

The TOC creation fails.

User response

Verify that the required support for translations between UCS-2 and UTF-8 is properly installed and configured on the system where the IBM Storage Protect is running.

Verify that the reported Unicode name is valid. Note that the Unicode name is encoded in little-endian UCS-2 and is reported in hexadecimal notation. If the Unicode name is not valid, the problem may usually be corrected by deleting or renaming the corresponding file or directory on the Network Appliance file server. The node identifier and parent node identifier are provided by the Network Appliance NDMP server. Their values are NDMP-server implementation dependent but will typically be the inode number of the file or directory. For more information about the Unicode name or the node identifiers, including using them to locate and correct the invalid file or directory, contact Network Appliance for support.

If possible, configure the Network Appliance file server to always encode file and directory names as UTF-8.

Once the problem has been corrected, try the operation again.

ANR49 Command:
42E Volume volume

name is not defined. The file name does not exist or has no space.

Explanation

A define volume command was issued for the indicated volume name. The volume name was specified without the FORMATSIZ parameter, but it either does not exist or exists as a file of size 0.

System action

The volume definition fails.

User response

Use the FORMATSIZ parameter to have the server pre-allocate space for the new volume.

ANR49 Command:
43E Volumes cannot be deleted from RECLAMATIONTYPE=SNAPLOCK storage pools.

Explanation

Deleting volumes from RECLAMATIONTYPE=SNAPLOCK storage pools is not allowed. Rather, deletion of empty volumes occurs automatically during reclamation processing.

System action

The operation fails.

User response

Allow deletion of empty volumes to be done automatically during reclamation processing.

ANR49 Command:
44E Volumes cannot be defined in RECLAMATIONTYPE=SNAPLOCK storage pools.

Explanation

Defining volumes on RECLAMATIONTYPE=SNAPLOCK storage pools is not allowed. Rather, the MAXSCRATCH parameter on the DEFINE and UPDATE STGPOOL commands is used to make storage pool space available for these storage pools.

System action

The operation fails.

User response

Use the MAXSCRATCH parameter on the DEFINE and UPDATE STGPOOL commands to create space in the storage pool.

ANR49 Command:Error
45E creating volume volume name: FORMATSIZ exceeded the maximum size allowed.

Explanation

When you define a volume, the server detects whether the format size of the volume exceeds the maximum size allowed.

System action

The operation fails.

User response

Reissue the DEFINE VOLUME command and

specify the FORMATSIZ parameter with a value of 8388607 MB or less.

ANR49 The character
46W encoding of NDMP file history messages for node node name, file system file system name is unknown. The IBM Storage Protect server will use the UTF-8 encoding to build a table of contents.

Explanation

While initializing a backup with a table of contents (TOC) for the specified node and file system, the IBM Storage Protect server determines that the character encoding of file history information from the NAS file server is unknown. The IBM Storage Protect server will assume file history information is encoded as UTF-8 in order to build a TOC.

If the character encoding is not UTF-8 and non-English characters are present, the names will be improperly displayed and probably unreadable, making recovery difficult.

System action

The operation continues.

User response

Verify that the encoding of file history information is UTF-8. For Network Appliance NAS file servers, verify that the volume language for the

specified node and file space is UTF-8, or a subset of UTF-8 (for example 7-bit ASCII).

ANR49 Container 47E *container name is locked by another operation and cannot be moved.*

Explanation

While attempting to move the specified container, the IBM Storage Protect was unable to obtain the locks necessary to move it.

System action

The operation fails. Server operation continues.

User response

Wait for conflicting processes and sessions are reduced, and re-issue the command.

ANR49 The list file 48E *named list file name contains more than max entry count entries.*

Explanation

While reading a list file, the server detects that the number of entries exceeds the maximum allowed.

System action

The operation fails.

User response

Consider breaking up the operation into multiple commands, each

handling a subset of the required entries.

ANR49 The server is 49E *unable to write to table table name because there is not enough temporary space in the database. Table of contents operation for node node name, file space file space name fails.*

Explanation

While operating on a table of contents (TOC), the server attempted to insert data into the specified temporary database table, but there is not enough temporary space in the server's database.

System action

The TOC operation fails.

User response

Ensure that sufficient temporary space is available in the server's database.

ANR49 The server is 50E *unable to retrieve NDMP file history information while building table of contents for node node name, file space file space name. NDMP node ID is NDMP node ID. Table of contents creation fails.*

Explanation

While creating a table of contents (TOC), the server attempted to retrieve information contained in a previous NDMP file history message. The information was not found. This could be caused by a problem with the NAS file server that is sending file history messages. The NDMP node ID reported in the message is the node ID referenced in the current NDMP file history message.

System action

The TOC creation fails.

User response

Verify that the NDMP server is properly sending file history information. Otherwise, contact your service representative.

ANR49 The writing of a 51E *table of contents for node node name, file space file space name failed. The object is excluded from storage pool pool name and all successor pools because of its size.*

Explanation

The server ends a table of contents (TOC) creation for the specified node. The size of the TOC is larger than that allowed in the storage pool specified by the TOC destination attribute of the assigned management class

backup copy group. No successor storage pools to the one specified on the copy group can accept the large TOC.

System action

The TOC creation is ended and server operation continues.

User response

Increase the maximum file size for one or more of the storage pools in the storage hierarchy to accommodate the TOC. An authorized administrator can increase the MAXSIZE parameter by issuing the UPDATE STGPPOOL command.

ANR49 The writing of a 52E *table of contents for node node name, file space file space name failed. No space is available in storage pool pool name and all successor pools.*

Explanation

The server ends a table of contents (TOC) creation for the specified node. The storage pool specified by the TOC destination attribute of the backup copy group in the assigned management class does not contain enough free space to hold the TOC. No successor storage pools to the one specified on the copy group contain enough free space.

System action

The TOC creation is ended and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. This action may also involve creating storage space by using an operating system-specific utility.

ANR49 53E The writing of a table of contents for node *node name*, file space *file space name* failed. The server encountered an error when writing to the storage device.

Explanation

The server ends a table of contents (TOC) creation for the specified node because an I/O error has been encountered by the server in writing to a device.

System action

The TOC creation is ended and server operation continues.

User response

Query the activity log to find messages preceding this one that specify the failing device. Storage pool volumes can be varied offline (by using the VARY command), or

the server may need to be halted to correct the hardware problem. After the problem is corrected, try the operation again.

ANR49 54E The writing of a table of contents for node *node name*, file space *file space name* failed. The data transfer was interrupted.

Explanation

The server ends a table of contents (TOC) creation for the specified node because data transfer to or from data storage was interrupted by an external event.

System action

The TOC creation is ended and server operation continues.

User response

Examine the messages issued prior to this message to determine why the data transfer was interrupted. Attempt the operation again if the problem can be resolved.

ANR49 55E The writing of a table of contents for node *node name*, file space *file space name* failed. The storage media is not available.

Explanation

The server ends a table of contents (TOC) creation for the specified node because storage volumes are not available in the

storage pools in which the TOC is to be stored.

System action

The TOC creation is ended and server operation continues.

User response

An authorized administrator can issue the DEFINE VOLUME command to add storage to one or more storage pools in the storage hierarchy. The VARY ONLINE command can be used to vary offline storage volumes online in the storage hierarchy to make them available for TOC storage.

ANR49 56E The writing of a table of contents for node *node name*, file space *file space name* failed. The server does not have sufficient recovery log space.

Explanation

The server ends a table of contents (TOC) creation for the specified node because sufficient log space is not available on the server.

System action

The TOC creation is ended and server operation continues.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file

systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR49 57E The writing of a table of contents for node *node name*, file space *file space name* failed. The server does not have sufficient database space.

Explanation

The server ends a table of contents (TOC) creation for the specified node because sufficient database space is not available on the server.

System action

The TOC creation is ended and server operation continues.

User response

To increase the amount of database space that is available to the server, issue the EXTEND DBSPACE command to add one or more directories to the database.

ANR49 58E The writing of a table of contents for node *node name*, file space *file space name* failed. The server is unable to start a new thread.

Explanation

The server ends a table of contents (TOC) creation for the specified node because sufficient memory is not available for starting additional processes on the server.

System action

The TOC creation is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR49 59E The writing of a table of contents for node *node name*, file space *file space name* failed. The server does not have sufficient memory.

Explanation

The server ends a table of contents (TOC) creation for the specified node because sufficient memory is not available on the server.

System action

The TOC creation is ended and server operation continues.

User response

See the documentation for the operating system about how to increase memory for an application.

ANR49 60E The writing of a table of contents for node *node name*, file space *file space name* failed. The server detected an internal error.

Explanation

The server ends a table of contents (TOC) creation for the specified node because an internal logic error is detected.

System action

The TOC creation is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search

for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR49 61E The writing of a table of contents for node *node name*, file space *file space name* failed. The server could not commit the transaction.

Explanation

An error was detected during transaction commit. This message should be preceded by other messages that give additional information about the failed transaction.

System action

The table of contents (TOC) creation is ended and server operation continues.

User response

Check for additional messages and eliminate the condition that caused the failed transaction. If the error cannot be isolated and resolved, contact your service representative.

ANR49 62E The writing of a table of contents for node *node name*, file space *file space name* failed. The server does not have sufficient mount points available to satisfy the request.

Explanation

The server was unable to allocate sufficient mount points to write the table of contents (TOC).

System action

The TOC creation is ended and server operation continues.

User response

If necessary, make more mount points available.

ANR49 63E The writing of a table of contents for node *node name*, file space *file space name* failed. See previous messages.

Explanation

The server ends a table of contents (TOC) creation for the specified node because a previous error has occurred.

System action

The TOC creation is ended and server operation continues.

User response

Examine the server messages issued prior to this message to determine the source of the error. Issue the QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR49 64I Space reclamation

deleted number of volumes WORM FILE volumes for storage pool storage pool name.

Explanation

During reclamation for the indicated storage pool, the server deleted the indicated number of empty WORM FILE volumes that have exceeded their retention date.

System action

Reclamation and server operations continue.

User response

None.

ANR49 65E operation is ended for storage pool storage pool name. Sufficient database space is not available.

Explanation

Insufficient server database space has been encountered during the indicated operation for the indicated storage pool.

System action

Either the Migration or Reclamation stops, or the operation specified in the message stops.

User response

To increase the amount of database space that is available to the server, issue the EXTEND

DBSPACE command to add one or more directories to the database.

ANR49 66E operation is ended for storage pool storage pool name; sufficient recovery log space is not available.

Explanation

Insufficient server recovery log space has been encountered during the indicated operation for the indicated storage pool.

System action

Either the Migration or Reclamation stops, or the operation specified in the message stops.

User response

To increase the amount of log space that is available to the server, evaluate the directories and file systems that are assigned to the ACTIVELOGDIRECTORY, ARCHIVELOGDIRECTORY, and ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file. An out of log space condition might occur because the ACTIVELOGDIRECTORY location is full.

Alternatively, an out of log space condition might occur if there are log files in the ACTIVELOGDIRECTORY location that are no longer active and cannot be archived to the ARCHIVELOGDIRECTORY and

ARCHFAILOVERLOGDIRECTORY locations. If necessary, specify a larger directory for the ARCHIVELOGDIRECTORY or ARCHFAILOVERLOGDIRECTORY options in the dsmserv.opt file and then restart the server.

ANR49 67W Expired WORM FILE volume volume name still contains valid data; data will not be protected.

Explanation

During space reclamation, the server detected the retention of the indicated WORM FILE volume has expired but the volume still contains valid data. The data on the volume will not be protected.

System action

Reclamation continues.

User response

Examine the server activity logs to find out why the reclamation does not move the valid data to another WORM FILE volume for protection.

ANR49 68W Reclamation failed on WORM FILE volume volume name.

Explanation

During space reclamation, server failed to move the files from the indicated WORM FILE volume. The files on the volume might not be protected if the reclamation period is exceeded.

System action

Reclamation continues on other volumes.

User response

Examine the server activity logs to find out why the reclamation does not move the valid data to another WORM FILE volume for protection. To determine when the reclamation period is expired, issue a QUERY VOLUME command for the indicated volume.

ANR49 69W Conversion from the server code page to UTF-8 fails. Verify the installation of the UTF-8 code page and tools for your operating system.

Explanation

Converting the command results from the server's code page to UTF-8 fails. Problems with operating system conversion tool or missing code page conversion tool might cause this problem. The server will attempt to recover from the situation. However, the recovery might result in unreadable characters or no output to appear on the web interface or interfaces that use the administrative API. Consult the language support information of the operating system for information on how to install UTF-8 code page, conversion tool support, and ICONV support.

System action

The server operation continues without converting the command output from the server's code page to UTF-8.

User response

Install the UTF-8 code page support on the operating system. This is normally available by installing the UTF-8 locale for your language.

ANR49 Audit command:
70E Missing or incorrect reclamation retention date for WORM FILE volume *volume name*; run AUDIT VOLUME FIX=YES for correction.

Explanation

The indicated audit process finds a WORM FILE storage volume for which the reclamation retention date is missing or incorrect. To fix the missing or incorrect date, issue the AUDIT VOLUME with FIX=YES command for the indicated volume. During AUDIT VOLUME processing, the server will indeed have interface to the Network Appliance filer to obtain the retention date of the SnapLock Log Volume for correction of the missing or incorrect date.

System action

Audit processing continues.

User response

Issue the AUDIT VOLUME command with FIX=YES, so that the reclamation retention date can be created or corrected.

ANR49 Audit command:
71E Missing or incorrect reclamation retention date for WORM FILE volume *volume name*. The reclamation retention date will be created or corrected.

Explanation

The indicated audit process finds a WORM FILE storage volume for which the reclamation retention date is missing or incorrect. Since FIX=YES has been specified for the audit command, the date will be created or corrected.

System action

Audit processing continues.

User response

None.

ANR49 Command:
72I Migration is not needed for the storage pool *pool name*.

Explanation

Migration is not needed for the specified storage pool because of one of the following reasons:

- The high migration threshold (percentage)

is set to 100 to prevent migration.

- If the specified storage pool uses random-access disk or sequential-access disk, the data capacity utilization is less than the low migration threshold.
- If the specified storage pool uses tape or optical media, the ratio of volumes that contain data to the total number of volumes in the storage pool is less than the low migration threshold.

System action

The server does not process the command.

User response

Re-issue the command when migration is needed for the pool.

ANR49 Command:
73I Reclamation is not allowed for the storage pool *pool name*.

Explanation

The high reclamation threshold (percentage) is set to 100 to prevent reclamation for the specified storage pool.

System action

The server does not process the command.

User response

Re-issue the command when migration is needed for the pool.

ANR49 The writing of a
74W table of

contents for node *node name*, file space *file space name* was cancelled.

Explanation

The server ends a table of contents (TOC) creation for the specified node because the process was cancelled.

System action

The TOC creation is ended and server operation continues.

User response

None.

ANR49 No Tcp port
75E available for backup from NAS node to server.

Explanation

The server was unable to set up a TCP/IP port for use in backing up or restoring from or to NAS nodes and the server. The server uses a range of ports as defined by the NDMPPORTRANGE option. If none of these ports can be set up for use, backups or restores from or to NAS nodes and server native storage pools will fail. If the NDMPPORTRANGE option is not specified, the server uses ephemeral ports (ports that the operating system assigns from a dynamic pool). If the system runs out of usable ports, operations to or from NAS nodes and server native storage pools will fail.

System action

The specific operation is ended and server operation continues.

User response

Operating specific utilities, e.g. netstat, may be used to examine ports which are in use. It may be necessary to specify the NDMPPORTRANGE option (which requires a server restart), to provide a sufficient number of ports.

ANR49 76W The device class *DevClassName* is not the same as device class *DevClassName* defined for the serverbackup node \$ *\$_TSMDBMGR_\$\$*.

Explanation

The device class in this command is not the same as the device class defined in the server backup node.

System action

The server will still process the command.

User response

ANR49 77E Container *container name* was not found in any storage pool.

Explanation

The container specified does not exist in any storage pool.

System action

The command fails and server operation continues.

User response

Re-issue the command with a valid container name.

ANR49 78E Container *container name* could not be opened.

Explanation

The container specified does not exist in the file system and could not be opened.

System action

The command fails and server operation continues.

User response

Re-issue the command with a valid container name.

ANR49 80I The protect storage pool process for *stgpool name* on server *this server to stgpool name* on server *other server* is complete. Extents protected: *extents protected of extents to protect*. Extents failed to protect: *extents failed to protect*. Extents deleted: *extents deleted of extents to delete*. Amount protected:

amount protected of amount to protect. Amount failed: *amount transferred*. Amount transferred: *amount transferred*. Elapsed time: *elapsed time*.

Explanation

The protect storage pool process is complete. The following list describes the information in the message:

- Extents protected: Extents that were successfully protected by being linked to matching extents on the target server.
- Extents failed to protect: Extents that were not successfully protected during the process of protecting to the target server.
- Extents deleted: Extents that were successfully deleted from the target server because the extent did not exist on the source server or because it was damaged on the target server and needed to be resent.
- Amount protected: Bytes that were successfully protected by being linked to matching extents on the target server.
- Amount failed: Bytes that were not protected. See previous messages for further details.
- Amount transferred: Bytes that were sent

to the target server during this process. The amount that was transferred can be less than the amount that is protected when the target server already has some of the extents or when compression is enabled.

- Elapsed time: How long the process ran.

ANR49 81I The preview of protect storage pool *stgpool name* on server *this server to stgpool name* on server *other server* is complete. Extents to be protected: *extents to protect*. Extents to be deleted: *extents deleted*. Amount to be protected: *amount protected*.

Explanation

The storage pool protection preview is complete. The following list describes the information in the message:

- Extents to be protected: Extents that need to be protected by being linked to matching extents on the target server.
- Extents to be deleted: Extents that need to be deleted because the extent does not exist on the source server.
- Amount to be protected: Bytes that need to be protected by being linked to

matching extents on the target server.

ANR49 82I The repair storage pool process for *stgpool name* on server *this server* from *stgpool name* on server *other server* is complete. Extents repaired: *extents repaired* of extents to repair. Extents failed: *extents failed*. Extents skipped: *extents skipped*. Amount repaired: *amount repaired* of amount to repair. Amount failed: *amount failed*. Amount skipped: *amount skipped*. Elapsed time: *elapsed time*.

Explanation

The storage pool repair process is complete. The following list describes the information in the message:

- Extents repaired: indicates the number of extents that were successfully repaired.
- Extents failed: indicates the number of extents that failed to be repaired.
- Extents skipped: indicates the number of extents that were skipped.
- Amount repaired: indicates the number

of bytes that were successfully repaired.

- Amount failed: indicates the number of bytes that failed to be repaired.
- Amount skipped: indicates the number of bytes that were skipped.
- Elapsed time: indicates how long the process ran.

ANR49 83I The preview of repair storage pool *stgpool name* on server *this server* from *stgpool name* on server *other server* is complete. Extents to be repaired: *extents repaired*. Amount to be repaired: *amount repaired*.

Explanation

The storage pool repair process is complete in preview mode. The following list describes the information in the message:

- Extents to be repaired: indicates the number of extents to be repaired.
- Amount to be repaired: indicates the number of bytes to be repaired.

ANR49 84E Container *container name* was not found in storage pool *stgpool name*.

Explanation

The container specified does not exist in the indicated storage pool.

System action

The command fails and server operation continues.

User response

Re-issue the command with a valid container name.

ANR49 85W This command will delete data files associated with damaged data extents in storage pool *stgpool name*. The command will also delete any copies of the deleted data files in copy pools.

Explanation

The execution of an AUDIT CONTAINER command will delete data files that are dependent on data extents stored in damaged containers. The command will also delete any copies of the files in copy pools.

System action

A message prompts you to continue the process or stop it.

User response

Enter 'Y' to audit containers or 'N' to stop the process.

ANR49 92W Audit command has encountered an I/O error for container *container name* in container storage pool *storage pool*

while attempting to read a data extent.

Explanation

The AUDIT CONTAINER process encountered an I/O error for the specified container while attempting to read a data extent. The data extent is going to be marked as damaged.

System action

None.

User response

Identify and resolve the I/O error for the container if possible. Verify that the container's physical device is functioning properly and that the container is usable.

ANR49 93W Audit container process terminated for container *container name* - process canceled.

Explanation

During processing of an AUDIT CONTAINER command for the container shown, the process performing the audit was cancelled.

System action

The AUDIT CONTAINER command is ended.

User response

None.

ANR49 94E Query whether the volume *volume name* is

in the library
library name
failed.

Explanation

An attempt to query if the indicated volume is in the specified library failed. It could be the library is offline or the library manager is down in a library sharing environment.

System action

The requested operation failed.

User response

Re-attempt the request when the library is brought up or when the library manager is up and running in a library sharing environment.

ANR50 01I *Update Stgpooldir command (Access=Destroyed) process started for stgpooldir name (process ID process ID).*

Explanation

As the result of an UPDATE STGPOOLDIR command that specified access=destroyed for the stgpooldir shown, the process whose ID is displayed has begun updating the stgpooldir.

System action

The access of the stgpooldir is set to destroyed

User response

None.

ANR50 23W *The data collection archives of the servermon component occupy more than percentage% of server database space.*

Explanation

If the data collection archives use a large percentage of available space, IBM Storage Protect server operations might be affected.

System action

Server operations continue, but insufficient database space might cause operations to fail or hang.

User response

To resolve the issue, take one or both of the following actions:

- - Add space to the file systems where the server database files are located.
- - Release space on the file systems or disks where the server database files are located.

ANR50 24W *The servermon component, which is used to monitor the server and generate data for analytics and troubleshooting, is not operational.*

Explanation

Servermon is not running or hung because of an issue with an output file. The issue occurs when an output file is renamed with a .done file extension when another file with the .done extension exists.

System action

Server operation continues, but the servermon component is not available to collect data. If errors occur in the system environment, you might not have sufficient data to analyze the errors.

User response

Restart the servermon component:

- - To restart servermon on IBM AIX or Linux operating systems, run the servermon executable file.
- - To restart servermon on Microsoft Windows operating systems, run the servermon.exe executable file.

ANR50 25E *Command: Data in storage pool storage pool name is not protected to storage pool target storage pool name on server target server.*

Explanation

The specified storage pool has not been protected by the replication target server.

System action

System operation continues, but the server does not process the command.

User response

1. If you have not specified a target replication server, issue the SET REPLSERVER command to specify the target replication server that will be used to protect the storage pool. The name specified in the SET REPLSERVER command must be associated with a valid server definition. 2. Issue the PROTECT STGPOOL command with a value of TYPE=REPLSERVER for the specified storage pool. For example, if the source storage pool is named POOL1, issue the following command: protect stgpool pool1 type=replserver By issuing the command, you restore the protect setting on the specified storage pool. 3. Retry the command that previously failed.

ANR50 27I *The service that is associated with object agent agent name must be deleted. To delete this service, run the following command: script name*

Explanation

The service to run the object agent server is no longer needed because the server was deleted.

System action

agent server, use either administrative or root user privileges to run the script with the configuration file.

User response

To stop and delete the service for this object

ANR Messages 06001-08000

ANR62 Command 00I *name: Level compression audit level compression audit started as process process ID.*

the process identifier reported.

System action

Server operation continues. The background audit attempts to identify client files that may be affected by the client compression problem.

User response

None.

ANR62 Command 02I *name: Verifying candidates from last audit.*

Explanation

A compression audit has started to verify the client file candidates that were identified in a previous compression audit execution. The verification process eliminates compression candidates that are now found to be expired by policy on the server.

System action

The audit operation continues.

User response

None.

ANR62 Command 03I *name: Starting level audit level compression*

audit from qualifying entries in the candidates list.

Explanation

A compression audit is starting to check qualifying candidates from the candidates list for the audit level specified. Client files that were identified as compression candidates at a lower level will be tested, subject to the qualifications that were specified for the command.

System action

The audit operation continues.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY PROCESS command can be used to monitor the progress of the audit operation.

ANR62 Command 04I *name: Process process ID, level audit level audit, ended successfully - compression suspects = total number of compression suspects.*

Explanation

A compression audit ended and is reporting the total number of suspect client files that have been found.

System action

The audit operation completes.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR62 Command 05I *name: Process process ID, continuing Level 1 compression audit with object object ID high order number.object ID low order number.*

Explanation

A level 1 compression audit is starting to evaluate client files for signs that they may be affected by the client compression problem. Since a previous level 1 audit has been executed, this audit will continue where the last audit stopped starting with the object whose identifier is specified.

System action

The audit operation continues.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY PROCESS command can be used to monitor the progress of the audit operation.

Explanation

A compression audit at the specified level has been started as a background server process with the process identifier reported.

System action

Server operation continues. The background audit attempts to identify client files that may be affected by the client compression problem.

User response

None.

ANR62 Command 01I *name: Level compression audit level compression audit starting as background process process ID.*

Explanation

A compression audit at the specified level was started as a background server process having

ANR62 Command
06I **name: Process**
process ID,
starting base
level 1
compression
audit.

Explanation

A level 1 compression audit is starting to evaluate client files for signs that they may be affected by the client compression problem. The audit starts with the first client file found on the server, even if previous level 1 audits have been executed.

System action

The audit operation continues

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY PROCESS command can be used to monitor the progress of the audit operation.

ANR62 Command
07I **name: Process**
process ID, level
audit level
analysis
detected
candidate file
high-level object
name low-level
object name in
file space client
filespace name
for node client
node name.

Explanation

A compression audit has found a candidate

file at the audit level specified. The name of the client node, file space, and file are displayed. This message is issued whenever a candidate file is detected during a compression audit that was started with the VERBOSE=YES parameter specified.

System action

The audit operation continues.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY PROCESS command can be used to monitor the progress of the audit operation.

ANR62 Command
08I **name: Process**
process ID, was
cancelled -
number of
candidate files
candidate files
were found in
number of files
examined files
examined prior
to cancellation.

Explanation

A compression audit operation was canceled with the CANCEL PROCESS command before completion. The number of candidate files that were found prior to the cancellation are displayed.

System action

The audit operation ends.

User response

The compression audit may be restarted with the AUDIT COMPRESSION command. The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR62 Command
09I **name: Process**
process ID, level
audit level audit
completed
successfully -
number of
candidate files
candidate files
were found in
number of files
examined files
examined.

Explanation

A compression audit operation completed successfully. The number of candidate files that were found are displayed.

System action

The audit operation ends.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR62 Command
10I **name: Process**
process ID, level
audit level audit
completed
successfully -
number of
candidate files
candidate files
were found.

Explanation

A compression audit operation completed successfully. The number of candidate files that have been found are displayed.

System action

The audit operation ends.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR62 Command
11I **name: Process**
process ID, level
audit level
analysis
detected
candidate file
object name in
file space client
filespace name
for node client
node name.

Explanation

A compression audit has found a candidate file at the audit level specified. The name of the client node, file space, and file are displayed. This message is issued whenever a candidate file is detected during a compression audit that was started with the VERBOSE=YES parameter specified.

System action

The audit operation continues.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY PROCESS command can be used to monitor the progress of the audit operation.

ANR62 Command
12I *name: Process process ID, level audit level analysis eliminated level candidate level candidate file object name in filespace client filespace name for node client node name from candidate status.*

Explanation

A compression audit at the level specified has eliminated a candidate file through further analysis. The name of the client node, file space, and file are displayed. This message is issued whenever a candidate file is eliminated from consideration during a compression audit that was started with the VERBOSE=YES parameter specified.

System action

The audit operation continues.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command. The QUERY

PROCESS command can be used to monitor the progress of the audit operation.

ANR62 Command
13I *name: Process process ID, was cancelled - number of files promoted candidate files were promoted as candidates at level audit level, number of files eliminated files were eliminated as candidates, and number of files expired candidates were eliminated because they were found to be expired on the server.*

Explanation

A compression audit operation was cancelled with the CANCEL PROCESS command before completion. The number of candidate files that were promoted as candidates at this level of audit, eliminated as candidates at this level of audit, and found to be expired before the cancellation are reported.

System action

The audit operation ends.

User response

The compression audit can be restarted with the AUDIT COMPRESSION command. The compression candidate list can be displayed with the

QUERY COMPRESSION command.

ANR62 Command
14I *name: Process process ID, completed successfully - number of files promoted candidate files were promoted as candidates at level audit level, number of files eliminated files were eliminated as candidates, and number of files expired candidates were eliminated because they were found to be expired on the server.*

Explanation

A compression audit operation completed successfully. The number of candidate files that were promoted as candidates at this level of audit, eliminated as candidates at this level of audit, and found to be expired are reported.

System action

The audit operation ends.

User response

The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR62 Command
15I *name: Backup for file high-level object name low-level object name in*

filespace client filespace name for node client node name could not be forced.

Explanation

It is not possible to force a backup for the specified file using the FORCE BACKUP command. This file was either backed up using an API client or by an ADSM version 2 client or higher.

System action

The force backup operation continues, the state of the compression record for this file is updated.

User response

If the file was backed up using a Version 2 client, or higher, you may remove this entry as a candidate, using the REMOVE COMPRESSION command. If the file was backed up using an API client, notify the client owner to again back this file up. Do not remove this entry until it becomes an "inactive" entry.

ANR62 Delete
20I *compression operation started as process process ID.*

Explanation

A compression deletion operation was started as a background server process with the indicated identifier.

System action

Server operation continues.

User response

None.

ANR62 21I Force backup operation started as process *process ID*.

Explanation

A force backup operation was started as a background server process with the indicated identifier.

System action

Server operation continues.

User response

None.

ANR62 22I Command name: Process *process ID* was cancelled - *number of files* files were processed prior to cancellation.

Explanation

The indicated process was cancelled prior to completion. This message displays the indicated number of files that were processed before the operation was cancelled.

System action

The process ends.

User response

The operation may be restarted by reissuing the indicated command.

ANR62 23I Delete compression process *process ID* has completed - *number of files* files were deleted.

Explanation

The indicated process has completed processing. All database references have been deleted for the indicated number of files.

System action

The process ends.

User response

None.

ANR62 24I Force backup process *process ID* has completed - *number of files* files were marked for forced backup.

Explanation

The indicated process has completed processing. The indicated number of files have been marked for forced backup. These files will be backed up during the next incremental backup.

System action

The process ends.

User response

None.

ANR62 25I File *identifier* removed as a suspect for compression errors.

Explanation

The file with the specified identifier has been removed from the database information concerning files with possible compression errors. Other database information concerning the file is not affected.

System action

Server operation continues.

User response

None.

ANR62 26I Command name: Started as background process *process ID*.

Explanation

A compression cleanup operation has been started to remove compression candidate information and temporary database entries from the server database. Client files are not affected by this operation.

System action

Server operation continues.

User response

The CANCEL PROCESS command can be used to cancel the compression cleanup operation. The QUERY

PROCESS command may be used to query the status of the operation.

ANR62 27I cleanup process name operation starting as process *process ID*.

Explanation

A compression cleanup operation has been started to remove compression candidate information and temporary database entries from the server database. Client files are not affected by this operation.

System action

Server operation continues.

User response

The CANCEL PROCESS command can be used to cancel the compression cleanup operation. The QUERY PROCESS command may be used to query the status of the operation.

ANR62 28W Cleanup process name: Process *process ID* has been cancelled - cleanup processing is incomplete.

Explanation

A compression cleanup operation has been cancelled prior to successful completion.

System action

Server operation continues.

User response

The CLEANUP COMPRESSION command can be used to restart the cleanup operation.

ANR62 Cleanup process 29I *name: Process process ID completed successfully.*

Explanation

A compression cleanup operation has successfully completed.

System action

The cleanup process ends.

User response

None.

ANR63 Command 00E *name: Insufficient server memory available for the operation.*

Explanation

A compression testing routine cannot continue because sufficient memory is not available on the server.

System action

The operation fails.

User response

Increase the memory available to the server by increasing the server region size, virtual machine size, paging space available on the system, or relocating the memory swap file, depending upon the platform on which the

server is executing. Additional memory may also be made available by limiting server activity (sessions, migration, and other activities) while this operation is processing.

ANR63 Command 01E *name: Invalid LEVEL specified. This command only supports a value of 1 or 2 for the LEVEL parameter.*

Explanation

An invalid LEVEL= parameter has been specified for the command.

System action

The command fails.

User response

Reissue the command specifying a value of 1 or 2 for the LEVEL parameter.

ANR63 Command 02E *name: Process process ID, failed - number of candidate files candidate files were found in number of files examined files examined prior to failure.*

Explanation

A compression audit operation failed before completion. The number of candidate files that were found prior to the failure are displayed.

System action

The audit operation ends.

User response

Examine message that appear before this message on the server console or in the activity log to determine the source of the failure. If the error can be corrected, re-execute the compression audit. If the failure cannot be determined or corrected, contact your service representative. The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR63 Command 03E *name: Process process ID, failed - number of files promoted candidate files were promoted as candidates at level audit level, number of files eliminated files were eliminated as candidates, and number of files expired candidates were eliminated because they were found to be expired on the server.*

Explanation

A compression audit operation failed before completion. The number of candidate files that were promoted as candidates at this level of audit, eliminated as candidates at this level of audit, and found to be expired before the audit failure are reported.

System action

The audit operation ends.

User response

Examine message that appear before this message on the server console or in the activity log to determine the source of the failure. If the error can be corrected, re-execute the compression audit. If the failure cannot be determined or corrected, contact your service representative. The compression candidate list can be displayed with the QUERY COMPRESSION command.

ANR63 Command 04E *name: Command cannot be processed until compression audit is performed.*

Explanation

The indicated command cannot be processed until a compression audit is performed using the AUDIT COMPRESSION command.

System action

The command fails.

User response

Issue the AUDIT COMPRESSION command and then repeat the attempted operation.

ANR63 Command 05E *name: File identifier is not a suspect for*

compression errors.

Explanation

The file with the specified identifier is not listed in the database as a suspect for compression errors. The file cannot be removed from the suspect list.

System action

Server operation continues.

User response

Use the QUERY COMPRESSION command to obtain the correct identifier for the file to be removed.

ANR63 Cleanup process 06E name: Process process ID failed due to server error - cleanup processing is incomplete.

Explanation

A compression cleanup operation has failed before successful completion.

System action

The cleanup process ends.

User response

Examine messages that appear on the server console or in the server activity log prior to this message to determine the cause of the error. If the error can be identified and corrected, restart the cleanup operation with the

CLEANUP COMPRESSION command. If the error cannot be corrected, contact your service representative.

ANR66 Command: 00E Invalid machine name - machine name.

Explanation

The machine name specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid machine name.

ANR66 Command: 01E Description information exceeds maximum length characters.

Explanation

The description specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid description.

ANR66 Command: 02E Recovery instructions file name exceeds maximum length characters.

Explanation

The recovery instructions file name specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery instructions file name.

ANR66 Command: 03E Characteristics file name exceeds maximum length characters.

Explanation

The characteristics file name specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid characteristics file name.

ANR66 Command: 04E Invalid building identifier - building.

Explanation

The building identifier specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid building identifier.

ANR66 Command: 05E Invalid floor identifier - floor.

Explanation

The floor identifier specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid floor identifier.

ANR66 Command: 06E Invalid room identifier - room.

Explanation

The room identifier specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid room identifier.

ANR66 Command: 07E Machine machine name is already defined.

Explanation

The machine specified in the command is already defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify another machine.

ANR66 Command: A 08E machine containing a server is already defined.

Explanation

The ADSMSERVER=YES parameter specified in the command is invalid because another machine has already been defined with this parameter. Only one machine can be defined to the server as containing a server.

System action

The server does not process the command.

User response

Issue the command again and do not specify ADSMSERVER=YES as a parameter.

ANR66 Machine 09I machine name defined.

Explanation

A DEFINE MACHINE command has added the requested machine to the server.

System action

None.

User response

None.

ANR66 Command: 10E Invalid recovery media name - recovery media name.

Explanation

The recovery media name specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery media name.

ANR66 Command: 11E Location information exceeds maximum length characters.

Explanation

The location specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid location.

ANR66 Machine 12I machine name updated.

Explanation

An UPDATE MACHINE command has updated one or more attributes of a machine.

System action

None.

User response

None.

ANR66 Machine 13I machine name deleted.

Explanation

A DELETE MACHINE command has deleted the requested machine from the server.

System action

None.

User response

None.

ANR66 Command: 14E Machine machine name is not defined.

Explanation

The machine specified in the command is not defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a valid machine.

ANR66 Command: 15E Failed to open

input file - file name.

Explanation

The input file specified in the command cannot be opened by the server.

System action

The server does not process the command.

User response

Issue the command again and specify an input file that is in a file system accessible by the server.

ANR66 Command: 16E Invalid sequence number - sequence number.

Explanation

The sequence number specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid sequence number.

ANR66 Command: Node 17W node name cannot be processed because it is not registered.

Explanation

The node indicated in the message cannot be processed because it is not registered.

System action

The indicated node is not processed, but another node can be processed if specified by this command.

User response

Issue the command again and specify a valid registered node.

ANR66 Command: No 18E matching node registered.

Explanation

The node specified in the command does not match any node registered to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a valid node.

ANR66 Node node name 19I associated with machine machine name.

Explanation

A DEFINE MACHNODEASSOCIATION command has associated the specified node with the specified machine. The node *node name* is associated with the machine *machine name*.

System action

None.

User response

None.

ANR66 Command: 20E Machine and node association is already defined.

Explanation

The machine and node association specified in the command is already defined to the server.

System action

The server operation continues, but the command has no effect.

User response

Issue the command again and specify a valid node.

ANR66 Node node name 21I disassociated from machine machine name.

Explanation

A DELETE MACHNODEASSOCIATION command has deleted the requested association from the server. The node *node name* is not associated with the machine *machine name*.

System action

None.

User response

None.

ANR66 Command: 22E Recovery media recovery media name is not defined.

Explanation

The recovery media specified in the command

is not defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery media.

ANR66 Command: 23W Machine machine name cannot be processed because it is not defined.

Explanation

The machine indicated in the message is not defined to the server.

System action

The indicated machine is not processed, but another machine can be processed if specified by this command.

User response

Issue the command again and specify a valid machine.

ANR66 Command: No 24E matching machine defined.

Explanation

The machine specified in the command does not match any machine defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a valid machine.

ANR66 Machine 25I machine name associated with recovery media recovery media name.

Explanation

A DEFINE RECOVERYMEDIAMACHASSOCIATION command has associated the specified machine with the specified recovery media. The machine *machine name* is associated with the recovery media *recovery media name*.

System action

None.

User response

None.

ANR66 Command: 26E Recovery media/machine association is already defined.

Explanation

The recovery media/machine association specified in the command is already defined to the server.

System action

The server operation continues, but the command has no effect.

User response

Issue the command again and specify a valid machine.

ANR66 Machine 27I *machine name disassociated from recovery media recovery media name.*

Explanation

A DELETE RECOVERYMEDIAMACHASSOCIATION command has deleted the requested association from the server. Machine *machine name* is not associated with the recovery media *recovery media name*.

System action

None.

User response

None.

ANR66 Command: 28E *Volume list exceeds maximum length characters.*

Explanation

The volume list specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid volume list.

ANR66 Command: 29E *Product name exceeds maximum length characters.*

Explanation

The product name specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify a valid product name.

ANR66 Command: 30E *Product information exceeds maximum length characters.*

Explanation

The product information specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify valid product information.

ANR66 Command: 31E *Missing volume list for boot recovery media.*

Explanation

Boot recovery media cannot be defined to the server without specifying a volume list.

System action

The server does not process the command.

User response

Issue the command again and specify the volume list for the boot recovery media.

ANR66 Recovery media 32I *recovery media name defined.*

Explanation

A DEFINE RECOVERYMEDIA command has defined the recovery media to the server.

System action

None.

User response

None.

ANR66 Recovery media 33I *recovery media name updated.*

Explanation

An UPDATE RECOVERYMEDIA command has updated one or more attributes of the recovery media.

System action

None.

User response

None.

ANR66 Recovery media 34I *recovery media name deleted.*

Explanation

A DELETE RECOVERYMEDIA command has deleted the requested recovery media from the server.

System action

None.

User response

None.

ANR66 Command: 35E *Recovery media recovery media name is already defined.*

Explanation

The recovery media specified in the command is already defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a different recovery media.

ANR66 Command: The 36E *characteristics specified for machine machine name exceeds maximum length characters.*

Explanation

The characteristics specified in the command exceeds the maximum

length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify valid characteristics.

ANR66 37E Command: The recovery instructions specified for machine *machine name* exceeds maximum length characters.

Explanation

The recovery instructions specified in the command exceeds the maximum length of allowable characters.

System action

The server does not process the command.

User response

Issue the command again and specify valid recovery instructions.

ANR66 38E Command: The characteristics for machine *machine name* are already defined.

Explanation

The characteristics for the machine specified in the command are already defined to the server.

System action

The server does not process the command.

User response

If the specified machine is defined to the server, issue an UPDATE MACHINE command to update the existing characteristics. If the machine is not defined to the server, run AUDIT DRM FIX to delete the characteristics.

ANR66 39E Command: The recovery instructions for machine *machine name* are already defined.

Explanation

The recovery instructions for the machine specified in the command are already defined to the server.

System action

The server does not process the command.

User response

If the specified machine is defined to the server, issue an UPDATE MACHINE command to update the existing recovery instructions. If the machine is not defined to the server, run AUDIT DRM FIX to delete the recovery instructions.

ANR66 40E Command: Cannot delete volume list for boot recovery media.

Explanation

A volume list cannot be deleted for boot recovery media. A volume list must exist for each boot recovery media defined to the server.

System action

The server does not process the command.

User response

To delete the volume list, issue an UPDATE RECOVERYMEDIA command and specify a recovery media type of OTHER and VOLUMES="". To change the recovery media type to BOOT, issue an UPDATE RECOVERYMEDIA command and specify the volume list containing the boot recovery media and TYPE=BOOT.

ANR66 41E Command: No association found for machine and node pair specified.

Explanation

No association found for the machine and node pair specified in the command.

System action

Server operation continues, but the command has no effect.

User response

Issue the command again and specify a valid machine and node pair.

ANR66 42E Command: No association

found for recovery media and machine pair specified.

Explanation

No association found for the recovery media and machine pair specified in the command.

System action

Server operation continues, but the command has no effect.

User response

Issue the command again and specify a valid recovery media and machine pair.

ANR66 43E Command: Invalid parameter value - *parameter value*.

Explanation

The parameter issued in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid parameter.

ANR66 44E Command: A character string must be specified.

Explanation

The INSERT command is invalid. A character string must be specified.

System action

The server does not process the command.

User response

Issue the command again and specify a valid character string.

ANR66 Node node name 45W has already been associated with machine machine name.

Explanation

The node specified in the DEFINE MACHNODEASSOCIATION command is invalid. The node is already associated with another machine shown in the message. A node can only be associated with one machine.

System action

The indicated node is not processed, but another node can be processed if specified by the command.

User response

Issue the command again and specify a valid node name.

ANR66 Audit command: 46I Auditing disaster recovery manager definitions.

Explanation

This message is displayed during a database audit and indicates that the disaster recovery manager definitions are

being examined by the database audit process.

System action

Audit processing continues.

User response

None.

ANR66 Audit command: 47E DRM global attributes are missing.

Explanation

A database audit process finds that the global attributes used for server DRM activities are missing.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to recreate the DRM global attributes.

ANR66 Audit command: 48I DRM global attributes are missing - default values will be used to recreate the attributes.

Explanation

A database audit process finds that the global attributes used for server DRM activities are missing. Because FIX=YES has been specified on the AUDIT command, default attribute values will be used to recreate

the administrative global attributes.

System action

Audit processing continues.

User response

None.

ANR66 Audit command: 49E DRM machine ID assignments are incorrect.

Explanation

A database audit process finds that the global attributes machine ID used for server DRM activities are incorrect.

System action

Audit processing continues.

User response

Reissue the audit command with FIX=YES specified so that the DRM global attributes can be corrected.

ANR66 Audit command: 50I DRM machine ID Assignments are incorrect - values will be corrected.

Explanation

A database audit process finds that the global attributes machine ID used for server DRM activities are incorrect. Since FIX=YES has been specified on the AUDIT command, the attribute value will be corrected in the server database.

System action

Audit processing continues.

User response

None

ANR66 Audit command: 51I Invalid priority value encountered for machine machine name.

Explanation

A database audit process encounters an invalid priority value for the machine indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the priority. Or, issue an UPDATE MACHINE command and specify a new priority value.

ANR66 Audit command: 52I Invalid priority value encountered for machine machine name - the default value will be set.

Explanation

A database audit process encounters an invalid machine priority value for the machine indicated. Because FIX=YES has been specified, the audit function sets the machine priority value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue an UPDATE MACHINE command to change the value after the audit command has completed.

ANR66 Audit command:
53I Invalid building value encountered for machine machine name.

Explanation

A database audit process encounters an invalid building value for the machine indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the building value. Or, issue an UPDATE MACHINE command and specify a new building value.

ANR66 Audit command:
54I Invalid building value encountered for machine machine name - the building value will be removed.

Explanation

A database audit process encounters an invalid building value for the machine indicated.

Because FIX=YES has been specified, the audit function removes the machine building value.

System action

Audit processing continues.

User response

To set the building value to another value, issue an UPDATE MACHINE command after the audit command has completed.

ANR66 Audit command:
55I Invalid floor value encountered for machine machine name.

Explanation

A database audit process encounters an invalid floor value for the machine indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the floor value. Or, issue an UPDATE MACHINE command and specify a new floor value.

ANR66 Audit command:
56I Invalid floor value encountered for machine machine name - the floor value will be removed.

Explanation

A database audit process encounters an

invalid floor value for the machine indicated. Because FIX=YES has been specified, the audit function removes the machine floor value.

System action

Audit processing continues.

User response

To set the floor value to another value, issue an UPDATE MACHINE command after the audit command has completed.

ANR66 Audit command:
57I Invalid room value encountered for machine machine name.

Explanation

A database audit process encounters an invalid room value for the machine indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the room value. Or, issue an UPDATE MACHINE command and specify a new room value.

ANR66 Audit command:
58I Invalid room value encountered for machine machine name - the room value will be removed.

Explanation

A database audit process encounters an invalid room value for the machine indicated. Because FIX=YES has been specified, the audit function removes the machine room value.

System action

Audit processing continues.

User response

To set the room value for the specified machine to another value, use the UPDATE MACHINE command after the audit command has completed.

ANR66 Audit command:
59I Invalid server value encountered for machine machine name.

Explanation

A database audit process encounters an invalid server value for the machine indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the server value. Or, issue an UPDATE MACHINE command and specify a new server value.

ANR66 Audit command:
60I Invalid server value encountered for machine

machine name - the default value will be set.

Explanation

A database audit process encounters an invalid server value for the machine indicated. Because FIX=YES has been specified, the audit function sets the machine server value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue an UPDATE MACHINE command to change the value after the audit command has completed.

ANR66 61I ***Audit command: Multiple machines are indicated as servers. Only one machine should have the server indicator set to YES.***

Explanation

A database audit process encounters more than one machine with the server indicator set to YES.

System action

Audit processing continues.

User response

For a list of machines with the server indicator

set to YES, issue a QUERY MACHINE ADSMSERVER=YES command. Issue an UPDATE MACHINE command for each machine that is not a server.

ANR66 62I ***Audit command: Characteristics for machine machine name not found.***

Explanation

A database audit process finds a characteristics reference from a machine for characteristics that are not in the server database.

System action

Audit processing continues.

User response

Issue an UPDATE MACHINE command to load the characteristics into the database after the audit command has completed.

ANR66 63I ***Audit command: Recovery instructions for machine machine name not found.***

Explanation

A database audit process finds a recovery instructions reference from a machine for recovery instructions that are not in the server database.

System action

Audit processing continues.

User response

Issue an UPDATE MACHINE command to load the recovery instructions into the database after the audit command has completed.

ANR66 64I ***Audit command: Invalid access value encountered for recovery media recovery media name.***

Explanation

A database audit process encounters an invalid access value for the recovery media indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the access value. Or, issue an UPDATE RECOVERYMEDIA command and specify a new access value.

ANR66 65I ***Audit command: Invalid access value encountered for recovery media recovery media name - the default value will be set.***

Explanation

A database audit process encounters an invalid access value for the recovery media indicated. Because FIX=YES has been specified, the audit function sets the recovery

media access value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue an UPDATE RECOVERYMEDIA command to change the value after the audit command has completed.

ANR66 66I ***Audit command: Invalid type value encountered for recovery media recovery media name.***

Explanation

A database audit process encounters an invalid type value for the recovery media indicated.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the type value. Or, issue an UPDATE RECOVERYMEDIA command and specify a new type value.

ANR66 67I ***Audit command: Invalid type value encountered for recovery media recovery media name - the default value will be set.***

Explanation

A database audit process encounters an invalid type value for the recovery media indicated. Because FIX=YES has been specified, the audit function sets the recovery media type value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue an UPDATE RECOVERYMEDIA command to change the value after the audit command has completed.

ANR66 68E Audit command: Machine is not found for internal machine ID machine ID, which is referenced by recovery media.

Explanation

A database audit process finds recovery media that references a machine that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct recovery media attributes.

ANR66 69I Audit command: Machine is not found for

internal machine ID machine ID, which is referenced by recovery media - the machine reference will be deleted.

Explanation

A database audit process finds recovery media that references a machine that is not defined in the server database. Because FIX=YES has been specified for the audit command, the reference will be removed from the server database.

System action

Audit processing continues.

User response

None.

ANR66 70E Audit command: Recovery media not found for internal recovery media ID recovery media ID, which is referenced by a machine.

Explanation

A database audit process finds a machine that references recovery media that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the recovery media attributes.

ANR66 71I Audit command: Recovery media not found for internal recovery media ID recovery media ID, which is referenced by a machine - the recovery media reference will be deleted.

Explanation

A database audit process finds a machine that references recovery media that is not defined in the server database. Because FIX=YES has been specified for the audit command, the reference will be deleted from the server database.

System action

Audit processing continues.

User response

None.

ANR66 72E Audit command: Client node not found for internal node ID node ID, which is referenced by a machine.

Explanation

A database audit process finds a machine that references a client node that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the machine attributes.

ANR66 73I Audit command: Client node not found for internal node ID node ID, which is referenced by a machine - the client node reference will be deleted.

Explanation

A database audit process finds a machine that references a client node that is not defined in the server database. Because FIX=YES has been specified for the audit command, the reference will be removed from the server database.

System action

Audit processing continues.

User response

None.

ANR66 74E Audit command: Machine not found for internal machine ID machine ID, which is referenced by a client node.

Explanation

A database audit process finds a client node that

references a machine that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the machine attributes.

ANR66 Audit command: 75I Machine not found for internal machine ID machine ID, which is referenced by a client node - the machine reference will be deleted.

Explanation

A database audit process finds a client node that references a machine that is not defined in the server database. Because FIX=YES has been specified for the audit command, the reference will be removed from the server database.

System action

Audit processing continues.

User response

None.

ANR66 Audit command: 76E Machine not found for internal machine ID machine ID, which is

referenced by characteristics.

Explanation

A database audit process finds characteristics that reference a machine that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the machine attributes.

ANR66 Audit command: 77I Machine not found for internal machine ID machine ID, which is referenced by characteristics - the machine reference will be deleted.

Explanation

A database audit process finds characteristics that reference a machine that is not defined in the server database. Because FIX=YES has been specified for the audit command, the reference will be removed from the server database.

System action

Audit processing continues.

User response

None.

ANR66 Audit command: 78E Machine not found for internal machine ID machine ID, which is referenced by recovery instructions.

Explanation

A database audit process finds recovery instructions that reference a machine that is not defined in the server database.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the machine attributes.

ANR66 Audit command: 79I Machine not found for internal machine ID machine ID, which is referenced by recovery instructions - the machine reference will be deleted.

Explanation

A database audit process finds recovery instructions that reference a machine that is not defined in the server database. Because FIX=YES has been specified for the audit command, the

reference will be removed from the server database.

System action

Audit processing continues.

User response

None.

ANR66 Audit command: 80E Missing or invalid internal database attribute encountered for machine machine name.

Explanation

A database audit process finds an invalid attribute for the specified machine.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the machine attributes.

ANR66 Audit command: 81I Missing or invalid internal database attribute encountered for machine machine name - the attribute will be corrected.

Explanation

A database audit process finds an invalid attribute for the specified machine. Because FIX=YES has been specified for the audit command the

invalid attribute will be corrected.

System action

Audit processing continues.

User response

None.

ANR66 Command:
82I Volume volume name ended: number of volumes volumes processed.

Explanation

The indicated command ended. The total number of volumes successfully processed is shown in the message.

System action

The indicated command ends.

User response

None.

ANR66 Command:
83I Volume volume name was moved from from state state to to state.

Explanation

Volume *volume name* is successfully moved from *state1* to *state2* by the indicated command.

System action

The indicated volume is moved to the destination state.

User response

None.

ANR66 Command:
84I Volume volume name was deleted.

Explanation

The MOVE DRMEDIA * WHERESTATE=COURIER RETRIEVE command displays the message. Volume *volume name* is deleted from the server database. For database backup volume, after its expiration days have elapsed, the volume history record is deleted when it is returned onsite. For an empty scratch copy storage pool volume, or active-data storage pool volume, the volume record is deleted when it is returned onsite.

System action

The volume record is deleted from the server database.

User response

Issue the CHECKIN LIBVOLUME command for each volume returned onsite if the volume is reused by the server.

ANR66 Command:
85E Volume volume name not defined.

Explanation

Volume *volume name* is not defined to the server.

System action

The indicated command is not processed if the volume name is explicitly specified on the command. If a volume pattern is specified on the

command, the volume shown is not processed, but the other volumes are processed.

User response

Reissue the command specifying a valid volume name.

ANR66 Command:
86E Volume volume name in use.

Explanation

The MOVE DRMEDIA * WHERESTATE=MOUNTABLE command displays the message. Volume *volume name* is used for another operation.

System action

The command is not processed if the volume is explicitly specified on the command. If a volume pattern is specified on the command, the indicated volume is not processed, but the other volumes are processed.

User response

Wait until the conflicting volume activity has completed, and then reissue the command. If the volume is currently mounted, but idle, dismount the volume by using a DISMOUNT VOLUME command and then retry this operation.

ANR66 Command:
87E Executable command string exceeds maximum length characters.

Explanation

The length of the executable command string specified with the CMD parameter exceeds the maximum length of allowable characters (255).

System action

The server stops processing the command.

User response

Issue the command again and specify a valid executable command with the CMD parameter.

ANR66 command: The
88E specified command failed because the entry/exit port of library library name is full. Please remove the volume(s) from the entry/exit port and re-issue the command name command.

Explanation

The indicated operation has failed because the entry/exit port of the specified library is full.

System action

The command fails.

User response

Remove the volume(s) from the entry/exit port and re-issue the command to process any remaining eligible volumes.

ANR66 Command: Copy
90E storage pool

cstgp name not defined for Offsite Recovery Media.

volume with access mode access mode.

volume is not processed, but the other volumes not associated with the indicated class are processed.

volume shown in the given library.

Explanation

The MOVE DRMEDIA or QUERY DRMEDIA command displays the message. The indicated command was issued with a copy storage pool name specified, but the specified pool name is not defined to DRM for Offsite Recovery Media.

System action

The indicated command is not processed.

User response

Reissue the command, after defining the specified copy storage pool to DRM for Offsite Recovery Media.

ANR66 Command: No 91E match is found for this move.

Explanation

The indicated command was issued, but no matching volumes are defined to the server or the volume specified is not managed by the command.

System action

The command is not processed.

User response

Reissue the command specifying the valid volume.

ANR66 Command: The 94E ORM state state is invalid for a

Explanation

The indicated command specifies an Offsite Recovery Media state that is invalid for a volume with the access mode shown. Specify COURIER or COURIERRETRIEVE for a volume that has access mode of OFFSITE.

System action

The server does not process the command.

User response

Reissue the command specifying COURIER or COURIERRETRIEVE as the state for a volume that has access mode of OFFSITE.

ANR66 Command: 95E Device class device class name not defined for volume volume name.

Explanation

The MOVE DRMEDIA or QUERY DRMEDIA command displays the message. The volume being processed has associated with the device class name shown that is not defined to the server.

System action

The command is not processed if the volume is explicitly specified on the command. If a volume pattern is specified on the command, the indicated

User response

Reissue the command after the indicated device class is defined to the server.

ANR66 command: 96I operation for volume volume name in library library name starting.

Explanation

The indicated operation is being started for the volume shown in the given library.

System action

The server starts the operation in response to the indicated command entered by an administrator.

User response

For SCSI library users, remove the volume from the slot and issue a REPLY command, along with the request ID, to tell the server the volume was removed from the library.

ANR66 command: 97I operation for volume volume name in library library name completed successfully.

Explanation

The indicated operation has completed successfully for the

System action

The volume is either deleted from the library inventory (if its status is something other than DATA) or marked not present (if its status is DATA).

User response

None.

ANR66 command: 98E operation for volume volume name in library library name failed.

Explanation

The indicated operation has failed for the volume shown in the given library. This message should be preceded by another error message which provides more detail about the error.

System action

The volume is not processed.

User response

Check for additional message and eliminate the condition that caused the failure, then retry the command.

ANR66 Cancel in 99I progress.

Explanation

The MOVE DRMEDIA command has been canceled and will end when resources have been freed for the background process.

This message may be displayed in response to a QUERY PROCESS command for a MOVE DRMEDIA command.

System action

Server operation continues.

User response

None.

ANR67 Command:
00I Invalid command completed successfully.

Explanation

The indicated command completed successfully.

System action

None.

User response

None.

ANR67 Command:
01E Invalid courier name - courier name.

Explanation

The indicated command has been entered with an invalid courier name.

System action

The server does not process the command.

User response

Reissue the command with a valid courier name.

ANR67 Command:
02E Invalid expiration days value - days value.

Explanation

The indicated command has been entered that specifies an invalid expiration days value.

System action

The server does not process the command.

User response

Reissue the command with a valid expiration days value.

ANR67 Command:
03E Invalid recovery plan prefix - prefix.

Explanation

The indicated command has been entered with an invalid recovery plan prefix.

System action

The server does not process the command.

User response

Reissue the command with a valid recovery plan prefix.

ANR67 Command:
04E Invalid plan instructions prefix - prefix.

Explanation

The indicated command has been entered with an invalid plan instructions prefix.

System action

The server does not process the command.

User response

Reissue the command with a valid plan instructions prefix.

ANR67 Command:
05E Invalid character for volume postfix - postfix character.

Explanation

The indicated command has been entered with an invalid character that is to be added to the volumes names in the recovery plan file.

System action

The server does not process the command.

User response

Reissue the command with a valid character.

ANR67 Command:
06E Invalid vault name - vault name.

Explanation

The indicated command has been entered with an invalid vault name.

System action

The server does not process the command.

User response

Reissue the command with a valid vault name.

ANR67 Command: The
07W state, access and location attributes of the copy storage pool volume

volume name were not updated.

Explanation

The MOVE DRMEDIA command could not update the state, access and location of volume *volume name* because it was in use by another server operation.

System action

If the volume was in an automated library, the MOVE DRMEDIA command may have checked the volume out of the library.

If a volume pattern is specified on the command, the server continues processing the other volumes.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command. Do not run the MOVE DRMEDIA and BACKUP STGPOOL commands concurrently. Ensure that the BACKUP STGPOOL command is complete before you issue the MOVE DRMEDIA command.

ANR67 Command: Copy
08W pool volume volume name was not processed. The volume was in use.

Explanation

The MOVE DRMEDIA command did not process volume *volume name*

because it was in use by another server operation.

System action

The indicated command ends, if the volume was explicitly specified in the command. If a volume pattern was specified in the command, the server continues processing other volumes that match the pattern.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR67 09W Command:
Active-data pool volume *volume name* was not processed. The volume was in use.

Explanation

The MOVE DRMEDIA command did not process volume *volume name* because it was in use by another server operation.

System action

The indicated command ends, if the volume was explicitly specified in the command. If a volume pattern was specified in the command, the server continues processing other volumes that match the pattern.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR67 10W Command:
The state, access and location attributes of the active-data storage pool volume *volume name* were not updated.

Explanation

The MOVE DRMEDIA command could not update the state, access and location of volume *volume name* because it was in use by another server operation.

System action

If the volume was in an automated library, the MOVE DRMEDIA command may have checked the volume out of the library.

If a volume pattern is specified on the command, the server continues processing the other volumes.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR67 11E Audit command:
An invalid database backup series expiration days encountered.

Explanation

A database audit process encounters an invalid value for database backup series expiration days.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the expiration days. Or, issue an SET DRMDBBACKUPEXPIRED AYS command and specify a new expiration days value.

ANR67 12I Audit command:
An invalid database backup series expiration days encountered - the default value will be set.

Explanation

A database audit process encounters an invalid value for database backup series expiration days. Because FIX=YES has been specified, the audit function sets the expiration days value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMDBBACKUPEXPIRED AYS command to change the value after the audit command has completed.

ANR67 13E Audit command:
An invalid check label value encountered.

Explanation

A database audit process encounters an invalid check label value.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the check label value. Or, issue a SET DRMCHECKLABEL command and specify a new check label value.

ANR67 14I Audit command:
An invalid check label value encountered - the default value will be set.

Explanation

A database audit process encounters an invalid check label value. Because FIX=YES has been specified, the audit function sets the check label value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMCHECKLABEL command to change the value after the audit command has completed.

ANR67 15E Audit command:
An invalid file process value encountered.

Explanation

A database audit process encounters an invalid file process value.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the file process value. Or, issue a SET DRMFILPROCESS command and specify a new file process value.

ANR67 Audit command: 16I An invalid file process value encountered - the default value will be set.

Explanation

A database audit process encounters an invalid file process value. Because FIX=YES has been specified, the audit function sets the file process value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMFILPROCESS command to change the value after the audit command has completed.

ANR67 Audit command: 17E Extraneous DRM global attribute encountered.

Explanation

A database audit process finds a nonexistent DRM global attribute.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to delete the extraneous attribute.

ANR67 Audit command: 18I Extraneous DRM global attribute encountered - the attribute will be deleted.

Explanation

A database audit process finds a nonexistent DRM global attribute. Since FIX=YES has been specified, the extraneous attribute will be deleted.

System action

Audit processing continues.

User response

None.

ANR67 Audit command: 19E DRM machine ID assignments not found.

Explanation

A database audit process finds no entries in server database for DRM internal machine ID assignments.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the error.

ANR67 Audit command: 20I DRM machine ID assignments not found - entry will be created.

Explanation

A database audit process finds no entries in server database for DRM internal machine ID assignments. Because FIX=YES has been specified for the audit command, the audit function creates an entry in the server database for the machine ID assignments.

System action

Audit processing continues.

User response

None.

ANR67 Audit command: 21E DRM recovery media ID assignments not found.

Explanation

A database audit process finds no entries in server database for DRM internal recovery media ID assignments.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the error.

ANR67 Audit command: 22I DRM recovery media ID assignments not found - entry will be created.

Explanation

A database audit process finds no entries in server database for DRM internal recovery media ID assignments. Because FIX=YES has been specified for the audit command, the audit function creates an entry in the server database for the recovery media ID assignments.

System action

Audit processing continues.

User response

None.

ANR67 Audit command: 23E Prefix for DRM recovery plan not found.

Explanation

A database audit process finds no entries in server database for DRM recovery plan prefix definitions.

System action

Audit processing continues.

User response

Issue the audit command again and specify

FIX=YES to correct the error.

ANR67 Audit command:
24I Prefix for DRM recovery plan not found - entry will be created.

Explanation

A database audit process finds no entries in server database for DRM recovery plan prefix definitions. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the recovery plan file prefix.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMPANFILEPREFIX command to change the value after the audit command has completed.

ANR67 Audit command:
25E Prefix for DRM recovery plan instructions not found.

Explanation

A database audit process finds no entries in server database for DRM recovery plan instructions prefix definitions.

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
26I Prefix for DRM recovery plan instructions not found - entry will be created.

Explanation

A database audit process finds no entries in server database for DRM recovery plan instructions prefix definitions. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the recovery plan instructions file prefix.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMPANINSTRPREFIX command to change the value after the audit command has completed.

ANR67 Audit command:
27E Postfix for DRM replacement volumes names not found.

Explanation

A database audit process finds no entries in server database for DRM postfix definitions for replacement volumes names.

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
28I Postfix for DRM replacement volumes names not found - entry will be created.

Explanation

A database audit process finds no entries in server database for DRM postfix definitions for replacement volumes names. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the replacement volumes postfix.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMPANVPOSTFIX command to change the value after the audit command has completed.

ANR67 Audit command:
29E Primary storage pools to be restored by DRM not found.

Explanation

A database audit process finds no entries in server database for primary storage pools to be restored by DRM.

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
30I Primary storage pools to be restored by DRM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for primary storage pools to be restored by DRM. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the primary storage pools to be restored by DRM.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMPRIMSTGPOOL command to change the value after the audit command has completed.

ANR67 Audit command:
31E Copy storage pools to be managed by DRM not found.

Explanation

A database audit process finds no entries in server database for copy storage pools to be managed by DRM.

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
32I Copy storage pools to be managed by DRM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for copy storage pools to be managed by DRM. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the copy storage pools to be managed by DRM.

System action

Audit processing continues.

User response

To override the default value, issue a

SET DRMCOPYSTGPOOL command to change the value after the audit command has completed.

ANR67 Command:
33E Cannot complete initialization for process name process.

Explanation

The indicated process fails during process initialization.

System action

The indicated command is ended and server processing continues.

User response

This usually indicates that sufficient server memory is not available on the server.

See the documentation for the operating system about how to increase memory for an application.

ANR67 Command:
34E Volume volume name not processed: library library name not defined.

Explanation

The indicated volume is not processed since the designated library has not been defined or has been deleted.

System action

The volume is not processed.

User response

Reissue the command using a different library name, or define the library before retrying the command.

ANR67 Audit command:
35E Courier information for ORM not found.

Explanation

A database audit process finds no entries in server database for courier name definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
36I Courier information for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for courier name definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the courier name definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMCOURIERNAME command to change the value after the audit command has completed.

ANR67 Audit command:
37E Vault name for ORM not found.

Explanation

A database audit process finds no entries in server database for vault name definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
38I Vault name for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for vault name definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server

database for the vault name definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMVaultNAME command to change the value after the audit command has completed.

ANR67 Audit command:
39E Database backup series expiration days for ORM not found.

Explanation

A database audit process finds no entries in server database for database backup series expiration days definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
40I Database backup series expiration days for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for database

backup series expiration days definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the database backup series expiration days definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMDBBACKUPEXPIREDAYS command to change the value after the audit command has completed.

ANR67 Audit command:
41E Check label indicator for ORM not found.

Explanation

A database audit process finds no entries in server database for check label definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
42I Check label indicator for ORM not found -

entry will be created.

Explanation

A database audit process finds no entries in server database for check label definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the check label definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMCHECKLABEL command to change the value after the audit command has completed.

ANR67 Audit command:
43E File process indicator for ORM not found.

Explanation

A database audit process finds no entries in server database for file process definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command:
44I File process indicator for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for file process definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the file process definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMFILEPROCESS command to change the value after the audit command has completed.

ANR67 Audit command:
45E DRM recovery media ID assignments are incorrect.

Explanation

A database audit process finds that the global attributes recovery media id used for server DRM activities are incorrect.

System action

Audit processing continues.

User response

Reissue the audit command with FIX=YES specified so that the DRM global attributes can be corrected.

ANR67 46I *Audit command: DRM recovery media ID assignments are incorrect - values will be corrected.*

Explanation

A database audit process finds that the global attributes recovery media ID used for server DRM activities are incorrect. Since FIX=YES has been specified on the AUDIT command, the attribute value will be corrected in the server database.

System action

Audit processing continues.

User response

None.

ANR67 47I *Number of volumes processed: number*

Explanation

The MOVE DRMEDIA command has processed the number of volumes displayed. This message may be displayed in response to a QUERY PROCESS command for a MOVE DRMEDIA command.

System action

Server operation continues.

User response

None.

ANR67 49I *Command: process process ID terminated before completion - process canceled.*

Explanation

The indicated background process performing the command shown has been canceled.

System action

If other processes are executing, these processes continue.

User response

None.

ANR67 50E *Disaster recovery manager operation command being processed is denied - server is not in compliance with license terms.*

Explanation

The server refuses a disaster recovery manager operation because the current server configuration is not in compliance with the license terms.

System action

Server operation continues. Disaster recovery operations cannot be performed until the server is licensed for the disaster recovery manager product.

User response

Issue a QUERY LICENSE command to determine which license terms are not in compliance.

ANR67 51E *Disaster recovery manager operation command being processed is denied - server is not licensed for disaster recovery manager support.*

Explanation

The server refuses a disaster recovery manager operation because the server is not licensed to support the disaster recovery manager.

System action

Server operation continues.

User response

Obtain the license to support the disaster recovery manager from your service provider or reseller. Issue the REGISTER LICENSE command with this license to enable the disaster recovery manager support.

ANR67 52W *Disaster recovery manager operation Command being processed is in violation of server license terms - server is not licensed for disaster*

recovery manager support.

Explanation

The server warns about a disaster recovery manager operation because the server is not licensed to support disaster recovery manager.

System action

Server operation continues.

User response

Obtain the license to support disaster recovery manager from your service provider or reseller. Issue the REGISTER LICENSE command with this license to enable disaster recovery manager support.

ANR67 53E *command being processed encountered an internal server error while checking license compliance.*

Explanation

The server encountered an internal error in determining whether the server is in compliance with license terms.

System action

Server operation continues.

User response

Issue the QUERY LICENSE and QUERY STATUS commands to

determine if the server is in compliance with license terms. Start an AUDIT LICENSES process to adjust server license information. When this process completes, start the session again. If the problem persists, contact your service representative.

ANR67 Machine 54I *machine name characteristics deleted.*

Explanation

A DELETE MACHINE command has deleted the requested characteristics from the server.

System action

None.

User response

None.

ANR67 Machine 55I *machine name recovery instructions deleted.*

Explanation

A DELETE MACHINE command has deleted the requested recovery instructions from the server.

System action

None.

User response

None.

ANR67 Machine 56E *machine name characteristics not defined to the server.*

Explanation

A DELETE MACHINE command cannot delete the requested characteristics from the server. The characteristics for the specified machine are not defined to the server.

System action

The server operation continues, but the command has no effect.

User response

Issue the command again and specify a machine that has characteristics defined to the server.

ANR67 Machine 57E *machine name recovery instructions not defined to the server.*

Explanation

A DELETE MACHINE command cannot delete the requested recovery instructions from the server. The recovery instructions for the specified machine are not defined to the server.

System action

The server operation continues, but the command has no effect.

User response

Issue the command again and specify a machine that has recovery instructions defined to the server.

ANR67 Command: Only 58E *one character*

string can be specified.

Explanation

The INSERT command is invalid. Either a characteristics string can be specified or a recovery instructions string can be specified on the command. Both types of strings cannot be specified on the command at the same time.

System action

The server does not process the command.

User response

Issue the command again and specify one valid character string.

ANR67 Disaster 59E *recovery manager operation command being processed is denied - disaster recovery manager support is not available for server platform platform.*

Explanation

The server refuses a disaster recovery manager operation because disaster recovery manager support is not available for the indicated server platform.

System action

Server operation continues.

User response

None.

ANR67 Command: 60E *Executable command line exceeds maximum length characters for volume volume name.*

Explanation

While writing to a command file, one of the following conditions occurred:

- The length of the command line written to the command file exceeds the LRECL specified for MVS or exceeds the default length for the command line written (255).
- The length of the command created after replacing the substitution variables &VOL, &VOLDN, &NL, and &LOC exceeds the server allowable command line length (1500).

System action

The server stops processing the command.

User response

Issue the command again and specify a valid executable command with the CMD parameter.

In the case where volumes are being ejected from the library, it is possible the server database does not reflect the true state of the volume. For MOVE DRMEDIA, rerun the command after

determining the cause of the error. For MOVE MEDIA, an update volume command should be issued setting the access of the volume to read only.

If this message is issued by a MOVE or QUERY DRMEDIA command and the volume record has been deleted from the server database, you can not use the MOVE or QUERY DRMEDIA commands to create the command file entry for this volume. In this case, you must manually issue the proper command.

ANR67 61E Command:
WHERESTATE
parameter is
required.

Explanation

The indicated command specifies a volume name containing a pattern matching character and the TOSTATE parameter. The WHERESTATE parameter is not specified. The specification is invalid. Pattern-matching for volume names is only allowed when the WHERESTATE parameter is specified.

System action

The server does not process the command.

User response

Reissue the command specifying a specific volume name or by specifying the WHERESTATE parameter along with the TOSTATE parameter.

ANR67 62E Command: The specified destination state *tostate* is invalid for volume *volume name* in current state state.

Explanation

The indicated command specifies a destination state that is invalid for the volume name shown in the indicated current state.

System action

The server does not process the volume.

User response

Issue the command again and specify a valid destination state for the volume name shown.

ANR67 63I Command: The specified command has been written to file '*file name*'.

Explanation

The command string specified with the CMD parameter on the command shown is written to the indicated file for each volume successfully processed.

System action

None.

User response

Execute the commands written to the file.

ANR67 64E command: Command file name exceeds maximum

characters
characters.

Explanation

The file name specified for containing the executable commands generated by DRM exceeds the maximum valid length shown.

System action

The server does not process the command.

User response

Reissue the command specifying a valid file name.

ANR67 65E Command: Invalid not mountable location name - *not mountable name*.

Explanation

The indicated command has been entered with an invalid not mountable location name.

System action

The server does not process the command.

User response

Reissue the command with a valid not mountable location name.

ANR67 66E Command: No command string is specified for **FORMAT=CMD.**

Explanation

The indicated command has been entered with a FORMAT=CMD to write a command string to a file,

but no command string is specified.

System action

The server does not process the command.

User response

Reissue the command specifying a command string to be written to a file.

ANR67 67E Command: Invalid command file name - *command file name*.

Explanation

The indicated command has been entered with an invalid command file name.

System action

The server does not process the command.

User response

Reissue the command with a valid command file name.

ANR67 68E command: Prefix exceeds maximum *characters* characters.

Explanation

The prefix specified for recovery plan files or for plan instructions files exceeds the maximum valid length. The maximum valid length is shown in the message.

System action

The server does not process the command.

User response

Reissue the command specifying a valid prefix.

ANR67 Audit command: 69E Not mountable name information for ORM not found.

Explanation

A database audit process finds no entries in server database for not mountable location name definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command: 70I Not mountable name information for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for not mountable location name definitions used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value

in the server database for the courier name definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMNOTMOUNTABLENAME command to change the value after the audit command has completed.

ANR67 Audit command: 71E Command file name information for ORM not found.

Explanation

A database audit process finds no entries in server database for command file name definitions used by DRM Offsite Recovery Media (ORM).

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 Audit command: 72I Command file name information for ORM not found - entry will be created.

Explanation

A database audit process finds no entries in server database for command file name definitions

used by DRM Offsite Recovery Media (ORM). Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the command file name definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMCMDFILENAME command to change the value after the audit command has completed.

ANR67 Command: 73E Unable to open file 'command file name' for output.

Explanation

An error occurred while opening the command file name shown. The file name shown in the message is specified with the indicated command, the SET command, or the default name generated by the indicated command.

System action

The server does not process the indicated command.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server

has proper authority to write to the file indicated. In AIX, make sure that the file name specified in the command or in the SET command is a full path file name, not a directory path name. In MVS, make sure that the file name specified in the command or in the SET command is a valid MVS file name. Reissue the command after determining the cause of the error.

ANR67 Command: 74E Invalid volume transition states - from 'specified WHERESTATE' state to 'specified TOSTATE' state.

Explanation

The TOSTATE specified is an invalid destination state for the WHERESTATE specified.

System action

The server does not process the command.

User response

Issue the command again and specify a valid destination state.

ANR67 Command: Error 75E writing to file 'file name' for volume volume name.

Explanation

An error occurred while writing to the file name shown for the indicated volume.

System action

The server stops processing the command.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated. Reissue the command after determining the cause of the error.

In the case where volumes are being ejected from the library, it is possible the server database does not reflect the true state of the volume. For MOVE DRMEDIA, rerun the command after determining the cause of the error. For MOVE MEDIA, an update volume command should be issued setting the access of the volume to read only.

If this message is issued by a MOVE or QUERY DRMEDIA command and the volume record has been deleted from the server database, you can not use the MOVE or QUERY DRMEDIA commands to create the command file entry for this volume. In this case, you must manually issue the proper command.

ANR67 Command:
76E Could not delete file: file name

Explanation

The indicated command failed but the file created could not be deleted.

System action

None.

User response

Delete the file shown.

ANR67 Command:
77E Command file 'file name' already in use.

Explanation

The command indicated references a command file name that is in use. The command file name shown is selected for use by the server in the following order:

- The file name specified on the indicated command.
- The file name specified on the SET command.
- The file name generated by the server (AIX only).

System action

The server does not process the command.

User response

Reissue the command at a later time or reissue the command specifying a different command file name.

ANR67 Command:
78E Volume volume name not processed: device type device type not supported.

Explanation

The indicated volume is not processed because the device type shown

is not supported by the function.

System action

The indicated volume is not processed.

User response

None.

ANR67 Disaster recovery manager operation command being processed is denied - disaster recovery manager support is not available for server platform.

Explanation

The server refuses a disaster recovery manager operation because disaster recovery manager support is not available for the server platform.

System action

Server operation continues.

User response

None.

ANR67 Audit command:
80E An invalid recovery plan file expiration days encountered.

Explanation

A database audit process encounters an invalid value for recovery plan file expiration days.

System action

Audit processing continues.

User response

Issue the command again and specify FIX=YES to correct the expiration days. Or, issue an SET DRMRPFEXPIREDDAYS command and specify a new expiration days value.

ANR67 Audit command:
81I An invalid recovery plan file expiration days encountered - the default value will be set.

Explanation

A database audit process encounters an invalid value for recovery plan file expiration days. Because FIX=YES has been specified, the audit function sets the expiration days value to the default value.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMRPFEXPIREDDAYS command to change the value after the audit command has completed.

ANR67 Audit command:
82E Recovery plan file expiration days not found.

Explanation

A database audit process finds no entries in server database for recovery plan file expiration days definitions.

System action

Audit processing continues.

User response

Issue the audit command again and specify FIX=YES to correct the error.

ANR67 83I Audit command: Recovery plan file expiration days not found - entry will be created.

Explanation

A database audit process finds no entries in server database for recovery plan file expiration days definitions. Because FIX=YES has been specified for the audit command, the audit function creates an entry using the default value in the server database for the recovery plan file expiration days definitions.

System action

Audit processing continues.

User response

To override the default value, issue a SET DRMRPFEXPIREDDAYS command to change the value after the audit command has completed.

ANR67 84I Number of volumes processed: number volumes processed. Volumes sent to library library name for checkout: number volumes sent.

Explanation

The MOVE DRMEDIA command has processed the number of volumes shown. Currently, the MOVE DRMEDIA command has sent for processing the number of volumes shown to the library shown. This message may be displayed in response to a QUERY PROCESS command for a MOVE DRMEDIA command.

System action

Server operation continues.

User response

None.

ANR67 85W Warning: The AD5M V3 Disaster Recovery Manager Disk Image Dump function is not supported in the disaster recovery manager . The AD5M V3 DRM Disk Image Restore function has been stabilized with no new maintenance or hardware

support planned.

Explanation

None.

System action

DRM Disk Image Dump and Restore function continues.

User response

None.

ANR69 00I Command: The recovery plan file file name was created.

Explanation

The recovery plan file was created.

System action

None.

User response

None.

ANR69 01I Number of plan stanzas processed: number.

Explanation

The PREPARE command has processed the number of stanzas displayed. This message may be displayed in response to a QUERY PROCESS command for a PREPARE command.

System action

Server operation continues.

User response

None.

ANR69 02I Number of plan stanzas processed: number. Currently processing stanza: recovery plan stanza name.

Explanation

The PREPARE command displays the number of stanzas already processed and the name of the stanza currently being processed. This message may be displayed in response to a QUERY PROCESS command for a PREPARE command.

System action

Server operation continues.

User response

None.

ANR69 03I Cancel in progress.

Explanation

The PREPARE command has been canceled and will end when resources have been freed for the background process. This message may be displayed in response to a QUERY PROCESS command for a PREPARE command.

System action

Server operation continues.

User response

None.

ANR69 04I Sending recovery plan file to target server.

Explanation

The PREPARE command is sending the recovery plan file to the target server. This message may be displayed in response to a QUERY PROCESS command for a PREPARE command.

System action

Server operation continues.

User response

None.

ANR69 05I Command: Recovery plan file *RPF volume name* was created. Specified device class *device class name*.

Explanation

The recovery plan file was created on the target server.

System action

Server operation continues.

User response

None.

ANR69 12W Command: The database was not backed up.

Explanation

No backups have been made of the server data base.

System action

Stanzas in the recovery plan do not include database recovery information.

User response

Backup the server data base by issuing the BACKUP DB command.

ANR69 13W Command: No volumes with backup data exist in copy storage pool *storage pool name*.

Explanation

A copy storage pool does not contain any volumes with usable data.

System action

Stanzas in the recovery plan do not include recovery information for any volumes in the storage pool.

User response

Determine why this storage pool has no volumes with usable data.

ANR69 14W Command: No volumes with active data exist in the active-data storage pool *storage pool name*.

Explanation

An active-data storage pool does not contain any volumes with usable data.

System action

Stanzas in the recovery plan do not include

recovery information for any volumes in the storage pool.

User response

Determine why this storage pool has no volumes with usable data.

ANR69 15W Command: Storage pool *storage pool name storage pool type* is not defined to the server.

Explanation

A storage pool that is not defined to the server was specified by SET DRMPRIMSTGPOOL, SET DRMCOPYSTGPOOL, or on the PREPARE command line.

System action

Stanzas in the recovery plan do not include recovery information for the storage pool.

User response

Correct the storage pool specification or define the storage pool to the server.

ANR69 16W Command: No copy storage pools are defined.

Explanation

The server has no copy storage pools defined.

System action

Recovery plan file will not contain copy storage pool information.

User response

Define copy storage pools in the server.

ANR69 18W Command: Recovery instructions file *file name* not found.

Explanation

A source file for recovery instructions was not found.

System action

The recovery plan will not contain recovery instructions.

User response

To get recovery instructions in the recovery plan, ensure the corresponding instructions source file exists. If it does, check authorizations to the file.

ANR69 20W Command: *S volume name* is not valid for server device type *device type*. Original volume name: *volume name*. Stanza is *stanza name*.

Explanation

Appending the replacement volume name postfix (as defined with SET DRMPPLANVPOSTFIX) to the original volume name has created a name that is not valid for the server device type shown.

System action

Replacement volume name is used in the recovery plan stanza.

User response

Devise a naming convention that allows the use of the replacement volume name postfix or at restore time manually update the generated recovery plan with a legal replacement name.

ANR69 Command: 21W Cannot locate server options file 'file name'.

Explanation

The Prepare command cannot open the specified server options file.

System action

VOLHISTORY and DEVCONFIG options are added to the recovery plan file stanza DSMSEV.OPT.FILE.

User response

None.

ANR69 Command: No 22W machine information was defined for the machine that contains server server name.

Explanation

The machine information has not been saved in the server data base.

System action

The recovery plan file does not contain the

machine and recovery media information stanzas.

User response

If you want to include the machine information in the recovery plan file, issue the DEFINE MACHINE command to save the machine information in the server data base and reissue the PREPARE command.

ANR69 Command: No 23W recovery media defined for machine machine name.

Explanation

No recovery media has been defined to the server for the specified machine.

System action

The recovery plan file does not contain the machine recovery media stanza.

User response

If you want to include the machine recovery media information in the recovery plan file, issue the DEFINE RECOVERYMEDIA command. Reissue the PREPARE command after the appropriate commands have been issued to define the recovery media.

ANR69 Command: No 24W recovery instructions defined for machine machine name.

Explanation

No recovery instructions have been defined to the server for the specified machine.

System action

The recovery plan file does not contain the machine recovery instructions stanza.

User response

If you want to include the machine recovery instructions in the recovery plan file, issue the INSERT command. Reissue the PREPARE command after the appropriate commands have been issued to define the recovery media.

ANR69 Command: No 25W machine characteristics defined for machine machine name.

Explanation

No characteristics have been defined to the server for the specified machine.

System action

The recovery plan file does not contain the machine characteristics stanza.

User response

If you want to include the machine recovery instructions in the recovery plan file, issue the INSERT command. Reissue the PREPARE command after the

appropriate commands have been issued to define the recovery media.

ANR69 Command: 26W There is at least one invalid generated volume name associated with storage pool storage pool server device type device type in stanza stanza name.

Explanation

Appending the replacement volume name postfix (as defined with SET DRMPANVPOSTFIX) to the original volume name has created a name that is not valid for the server device type shown.

System action

Replacement volume name is used in the recovery plan stanza.

User response

Devise a naming convention that allows the use of the replacement volume name postfix or at restore time manually update the generated recovery plan with a legal replacement name.

ANR69 Command: 27W Primary storage pool storage pool name, storage pool data format, is not managed by DRM.

Explanation

A SET DRMPRIMSTGPOOL or the PREPARE command specified a primary storage pool that is used for backing up NAS file servers, using NDMP. DRM does not manage a storage pool with this data format.

System action

Stanzas in the recovery plan do not include recovery information for the storage pool.

User response

Correct the storage pool specification.

ANR69 Command: No 28W eligible primary storage pools match the specified storage pool name *storage pool name* .

Explanation

The storage pool specified by the SET DRMPRIMSTGPOOL or on PREPARE command does not match any eligible primary storage pool. Possible reasons include:

- Primary storage pools were not defined.
- Primary storage pools were defined, but their data formats are for NAS file servers, or their device classes use the CENTERA device type.
- The name specified does not match eligible primary storage pool names.

System action

Stanzas in the recovery plan do not include recovery information for the storage pools.

User response

Correct the storage pool specification or define eligible storage pools to the server.

ANR69 Command: No 29W eligible primary storage pools are defined to the server.

Explanation

The server has no eligible primary storage pools defined.

System action

Recovery plan file will not contain primary storage pool information.

User response

Define eligible primary storage pools to the server.

ANR69 Command: 30W Primary storage pool *storage pool name*, whose device class uses the **CENTERA device type**, is not managed by **DRM**.

Explanation

The SET DRMPRIMSTGPOOL or the PREPARE command specified a primary storage pool whose device class uses the CENTERA device type. DRM does not manage

storage pools that use the CENTERA device type.

System action

Stanzas in the recovery plan do not include recovery information for the storage pool.

User response

Correct the storage pool specification.

ANR69 command: 37E *parameter name* parameter not allowed from the command line.

Explanation

The parameter shown is not allowed from the command line interface.

System action

The server does not process the command.

User response

Reissue the command with the parameter from the web.

ANR69 No information 38I found for stanza *stanza name*.

Explanation

No information found for recovery plan file stanza shown.

System action

The server does not display the information for the stanza.

User response

None

ANR69 Command: 39E Invalid recovery plan file stanza name - *stanza name*.

Explanation

The specified recovery plan file stanza name is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery plan file stanza name.

ANR69 command 40E command not allowed from server console.

Explanation

The indicated command is not allowed to be issued from the server console.

System action

The command is not executed.

User response

Reissue the command from an administrator using an Administrative Client.

ANR69 Query recovery 41E plan file content is waiting for mount point in device class *device class name*.

Explanation

Query recovery plan file content has begun to wait for a mount point that can be used for a volume in the device class shown.

System action

The function waits for the mount point.

User response

Respond to any mount requests.

ANR69 42E Query recovery plan file content is waiting for access to input volume *volume name*.

Explanation

Query recovery plan file content has begun to wait for availability of the input volume shown.

System action

The function waits for the volume to become available.

User response

None.

ANR69 43E Query recovery plan file content is waiting for mount of input volume *volume name*.

Explanation

Query recovery plan file content has begun to wait for the mount of the input volume shown.

System action

The function waits for mount.

User response

Respond to any mount requests.

ANR69 44E Command: Invalid recovery plan file name - *recovery plan file name*.

Explanation

The recovery plan file name specified in the command is invalid.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery plan file name.

ANR69 45E Command: Cannot find filesystem *filesystem name* for recovery plan file *recovery plan file name*.

Explanation

The server cannot find the filesystem (ADSM.SERVER) for recovery plan file specified in the server.

System action

The retrieve operation ends, and the server operation continues.

User response

Issue QUERY FILESPACE command on the target server to see if there is any filesystems created for the recovery plan file. The filesystem name for the recovery plan file is ADSM.SERVER.

ANR69 46E Command: Retrieve failed for *recovery plan file name* - error on input storage device.

Explanation

The server ends an retrieve operation because an I/O error has been encountered by the server in reading from a device.

System action

The retrieve operation ends, and the server operation continues.

User response

Query the activity log to find messages preceding this one that specify the device that is failing. The server may need to be shut down with the HALT command to correct the hardware problem.

ANR69 47E Command: Data storage retrieve failed for *recovery plan file name* - error detected.

Explanation

The server ends the retrieve operation because an error has been encountered on the server. Some common reasons for the error are:

- Data is corrupted on the input volume
- Hardware or media failure has occurred
- Database corruption

System action

The retrieve operation ends, and the server operation continues.

User response

Examine any prior error messages to determine the source of the error. Use the QUERY ACTLOG command to view the activity log and search for messages if needed. Correct the problem and try the restore or retrieve again. If retry of the operation continues to fail contact your service representative.

ANR69 48E Command: Cannot find the recovery plan file for *Recovery plan file name*.

Explanation

The server cannot find the specified recovery plan file.

System action

The server does not process the command.

User response

Issue the command again and specify a valid recovery plan file name. Use the QUERY RPFIL command to view the name of the recovery plan file that you are interested in displaying its content.

ANR69 49E Command: No matching device class defined.

Explanation

The device class specified in the command does not match any device class defined to the server.

System action

The server does not process the command.

User response

Issue the command again and specify a valid device class.

ANR69 50E Command: The recovery plan file was not created.

Explanation

Due to a processing error, a recovery plan file was not created.

System action

Recovery plan file not created.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Reissue the command, after determining the cause of the error.

ANR69 51E Command: Recovery plan file file name was not created.

Explanation

Due to a processing error, a recovery plan file was not created.

System action

Recovery plan file not created.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated and that there is sufficient space in the file system for the file. Reissue the command, after determining the cause of the error.

ANR69 52E Command: File name file name already exists.

Explanation

File already exists.

System action

None.

User response

Determine why file already exists. If possible, delete it. Reissue the command, after determining the cause of the error.

ANR69 53E Command: File write error.

Explanation

An error occurred while writing to the recovery plan file.

System action

The recovery plan file was not created.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that there is sufficient space in the file system for the file. Reissue the command after determining the cause of the error.

ANR69 54E Command: Unable to open file 'file name' for output.

Explanation

An error occurred while opening the recovery plan file for output.

System action

The recovery plan file was not created.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Make sure that the server has proper authority to write to the file indicated. Reissue the command after determining the cause of the error.

ANR69 59E Command: Plan instructions prefix 'instructions prefix' is not valid.

Explanation

The prefix specified for recovery instructions is not valid.

System action

The recovery plan file was not created.

User response

Reissue the command specifying a valid prefix.

ANR69 60E Command: Recovery plan prefix 'plan prefix' is not valid.

Explanation

The prefix specified for the recovery plan file is too long.

System action

The recovery plan file was not created.

User response

Reissue the command specifying a valid prefix.

ANR69 62E Command: Query database failed.

Explanation

A server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
63E Query log failed.

Explanation

A server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
64E Query storage pool failed.

Explanation

An server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
65E Query volume failed.

Explanation

An server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
66E Query database volume failed.

Explanation

A server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
67E Query log volume failed.

Explanation

A server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
68E Query volume history failed.

Explanation

An server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
69E Query device class failed.

Explanation

An server database query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command: A
70E recovery plan file is already being created.

Explanation

The server command processor will not start a background process to execute another PREPARE command.

System action

The command process ends and server operation continues.

User response

Reissue the command after the first PREPARE command has completed.

ANR69 Command:
71E Could not delete plan file *plan file name*.

Explanation

Prepare command failed but the plan file created could not be deleted.

System action

None.

User response

Delete the plan file.

ANR69 Command:
72E Query machine failed.

Explanation

A server machine query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
73E Query recovery media failed.

Explanation

A server recovery media query error occurred. This message always accompanies another error message and provides more detail about that error.

System action

The recovery plan file was not created.

User response

Issue a QUERY ACTLOG command to view the activity log and search for messages. If the error cannot be isolated and resolved, contact your service representative.

ANR69 Command:
74E Unable to open file *file name*.

Explanation

An error occurred while PREPARE was attempting to open the local recovery plan file copy in order to send it to the target server.

System action

The recovery plan file is not stored on the target server.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Reissue the command after determining the cause of the error.

ANR69 Command:
75E Unable to read file *file name*.

Explanation

An error occurred while PREPARE was attempting to read the local recovery plan file copy in order to send it to the target server.

System action

The recovery plan file is not stored on the target server.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Reissue the command after determining the cause of the error.

ANR69 Command: The recovery plan file was not stored on another server and the local copy *file name* cannot be deleted.

Explanation

Due to a processing error, a recovery plan file was not stored on target server and the local copy of the plan file cannot be deleted.

System action

PREPARE processing ends.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. After determining the

cause of the error, re-issue the PREPARE command and delete the local recovery plan file.

ANR69 Command:
77E Device class name *device class name* exceeds maximum characters characters.

Explanation

The command shown has been entered and specifies a device class name that is too long. The maximum valid length for a device class name is shown in the message.

System action

The server does not process the command.

User response

Reissue the command specifying a valid device class name.

ANR69 Command:
78E Invalid device class *device class name*.

Explanation

The specified device class cannot be used by the command shown. Possible reasons include:

- The device class is not defined.
- The device class is defined but not of type SERVER.
- The name specified is an invalid device class name.

System action

The server does not process the command.

User response

Reissue the command with a valid device class.

ANR69 Command: 79E Recovery plan file was not created. Specified device class *device class name*.

Explanation

A recovery plan file cannot be not created using the specified device class.

System action

Recovery plan file not created.

User response

Examine error messages that may have been displayed prior to this message and correct any problems, if possible. Reissue the command, after determining the cause of the error.

ANR69 Command: 80E Prefix *prefix* exceeds maximum characters.

Explanation

The command shown has been entered and specifies a plan or instructions prefix that is too long. The maximum valid length is shown in the message.

System action

The server does not process the command.

User response

Reissue the command specifying a shorter prefix.

ANR69 Command: Out 84E of space on sequential media, scratch media could not be mounted. Specified device class *device class name*; maximum capacity: *number of bytes bytes*.

Explanation

During command PREPARE processing, the process encounters an out-of-space condition writing to the sequential media. Command PREPARE ends when there is no more space on the sequential media for storing data.

System action

Command PREPARE processing ends. Server processing continues.

User response

Increase the device class maximum capacity and reissue the PREPARE command. If an object was created on the target server, issue the RECONCILE VOLUMES FIX=YES to delete the object from the target server.

ANR69 Command: Error 85E encountered in

accessing data storage - volume already in use.

Explanation

During command *command* processing, a volume cannot be used because it is already defined in a storage pool, or has been previously used by an export, database dump, database backup, or DRM prepare operation or is in use by another process.

System action

The command *command* operation is ended and server operation continues.

User response

Re-issue the PREPARE command.

ANR69 Command: The 86E DELETEDATEST parameter is only valid for volume history types RPFIL or RPFNSNAPSHOT.

Explanation

The command failed because an invalid volume history type was specified for the TYPE= parameter.

System action

The command fails, and server operation continues.

User response

Re-issue the command and specify a valid type value.

ANR69 Command: 87W Container-copy pool volume *volume name* was not processed. The volume was in use.

Explanation

The MOVE DRMEDIA command did not process volume *volume name* because it was in use by another server operation.

System action

The indicated command ends, if the volume was explicitly specified in the command. If a volume pattern was specified in the command, the server continues processing other volumes that match the pattern.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR69 Command: The 88W state, access and location attributes of the container-copy storage pool volume *volume name* were not updated.

Explanation

The MOVE DRMEDIA command could not update the state, access and location of volume *volume name* because it was in use by another server operation.

System action

If the volume was in an automated library, the MOVE DRMEDIA command may have checked the volume out of the library.

If a volume pattern is specified on the command, the server continues processing the other volumes.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR69 89W Command: Retention pool volume *volume name* was not processed. The volume was in use.

Explanation

The MOVE DRMEDIA command did not process volume *volume name* because it was in use by another server operation.

System action

The indicated command ends, if the volume was explicitly specified in the command. If a volume pattern was specified in the command, the server continues processing other volumes that match the pattern.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR69 90W Command: The state, access and location attributes of the Retention storage pool volume *volume name* were not updated.

Explanation

The MOVE DRMEDIA command could not update the state, access and location of volume *volume name* because it was in use by another server operation.

System action

If the volume was in an automated library, the MOVE DRMEDIA command may have checked the volume out of the library.

If a volume pattern is specified on the command, the server continues processing the other volumes.

User response

Wait until the conflicting volume activity has completed, and then reissue the MOVE DRMEDIA command.

ANR78 00I DSMSERV (AIX) generated at *time on date*.

Explanation

The server module was generated at the indicated date and time.

System action

Server operation continues.

User response

None.

ANR78 00I DSMSERV (Linux) generated at *time on date*.

Explanation

The server module was generated at the indicated date and time.

System action

Server operation continues.

User response

None.

ANR78 00I DSMSERV (Windows) generated at *time on date*.

Explanation

The server module was generated at the indicated date and time.

System action

Server operation continues.

User response

None.

ANR78 01I Subsystem (AIX) process ID is *process identifier*.

Explanation

The server process has the indicated process identifier.

System action

Server operation continues.

User response

None.

ANR78 01I Subsystem (Linux) process ID is *process identifier*.

Explanation

The server process has the indicated process identifier.

System action

Server operation continues.

User response

None.

ANR78 02E Shared memory (AIX) segments for a server running in the current directory already exist. The -F parameter can be used to overwrite.

Explanation

Shared memory segments are created for each instance of the server based on the current directory. This message indicates that the shared memory segments already exist. A server is presently running from the current directory or a server running from the current directory ended abnormally.

System action

The server terminates.

User response

If the server running in the current directory terminated abnormally, start dmserv with the -F parameter to force the existing shared memory segments to be overwritten. If you want to run multiple instances of the server, each instance must be run from a separate directory with a separate dmserv.dsk file and have separate log, database, and storage volumes.

**ANR78 Attempt to
03E overwrite a
(AIX) shared memory
segment, as
directed with
the -F
parameter,
FAILED.**

Explanation

The server has been started with the -F parameter and unsuccessfully attempted to overwrite existing shared memory segments. This error occurs when the user that starts the server with -F parameter is not the owner of the shared memory segments and lacks the required authority.

System action

Server terminates.

User response

Resolve the authorization problem and restart the server.

**ANR78 Error reason.
04E
(AIX)**

Explanation

The server attempted to open, lock, or write to the specified file. The open, lock, or write operation failed. These are some common reasons for the failure.
Another server is already running from this directory and has the file open or locked.
The instance user ID does not have enough write access to the file.
The file system is full.

System action

Server terminates.

User response

Examine the contents of the lock file. The process ID for the server that is running is recorded in this file. Two servers cannot be started from the same directory. You can remove the lock file and attempt to start the server only if the recorded process ID is not currently running dmserv. The 'ps -e' AIX command can be used to display processes that are currently running. Check the permissions of the directory and file system and ensure that there is appropriate permission for the instance user ID to write to the file. Check that there is enough space in the file system.

**ANR78 Error reason.
04E
(Linux)**

Explanation

The server attempted to open, lock, or write to the specified file. The open,

lock, or write operation failed. These are some common reasons for the failure.
Another server is already running from this directory and has the file open or locked.
The instance user ID does not have enough write access to the file.
The file system is full.

System action

Server terminates.

User response

Examine the contents of the lock file. The process ID for the server that is running is recorded in this file. Two servers cannot be started from the same directory. You can remove the lock file and attempt to start the server only if the recorded process ID is not currently running dmserv. The 'ps -e' command can be used to display processes that are currently running. Check the permissions of the directory and file system and ensure that there is appropriate permission for the instance user ID to write to the file. Check that there is enough space in the file system.

**ANR78 Error reason.
04E
(Windows)**

Explanation

The server attempted to open, lock, or write to the specified file. The open, lock, or write operation failed. These are some common reasons for the failure.

Another server is already running from this directory and has the file open or locked.
The instance user ID does not have enough write access to the file.
The file system is full.

System action

Server terminates.

User response

Examine the contents of the lock file. The process ID for the server that is running is recorded in this file. Two servers cannot be started from the same directory. You can remove the lock file and attempt to start the server only if the recorded process ID is not currently running dmserv. Check the permissions of the directory and file system and ensure that there is appropriate permission for the instance user ID to write to the file. Check that there is enough space in the file system.

**ANR78 Volume volume
05E name is in use
(AIX) by another
server.**

Explanation

The server has attempted to open a disk volume but has discovered that the volume is in use by another server.

System action

The open operation fails for the volume.

User response

To prevent concurrent RAW volume access by

more than one server, files are created in the /tmp directory to 'lock' these volumes. The names of these temporary files are /tmp/adsm.disk.dev.<volumename> where <volumename> is the name of the RAW volume defined in the /dev directory. Please note that the name for the logical volume as defined in SMIT is represented in the /dev directory with a leading 'r' character (for example, a raw volume defined in SMIT as dsmstg1 will be represented in the /dev directory as the file /dev/rdsmstg1).

You may use the AIX 'ps -e' command to determine if other dsmserv processes are running. You may remove the temporary lock files and attempt to re-start the server ONLY if there are no other dsmserv processes running

ANR78 Volume volume 05E name is in use (Linux) by another server.

Explanation

The server has attempted to open a disk volume but has discovered that the volume is in use by another server.

System action

The open operation fails for the volume.

User response

To prevent concurrent RAW volume access by more than one server, files are created in

the /tmp directory to 'lock' these volumes. The names of these temporary files are /tmp/adsm.disk.dev.<volumename> where <volumename> is the name of the RAW volume defined in the /dev directory. Please note that the name for a RAW logical volume as defined in Solaris is in the /dev directory with a leading 'r' character (for example, a raw volume defined in Solaris on a regular SCSI drive as dsk/c0t0d0s0 will be represented in the /dev directory as the file /dev/rdisk/c0t0d0s0). For a REGULAR DISK volume, the server automatically locks/unlocks a volume. Different linked file names pointing to the same volume will cause this message since the server locks the linked volume, not the link name itself.

You may use the Solaris 'ps -ef | grep dsmserv' command to determine if other dsmserv processes are running. You may remove the temporary lock files for RAW volumes and attempt to re-start the server ONLY if there are no other dsmserv processes are running.

ANR78 Unable to open 06W file file. (AIX)

Explanation

The server was unable to open the indicated file.

System action

The operation that was to use the indicated

file fails. A subsequent unnumbered message had details from the system.

User response

Determine the reason for being unable to open the file and re-attempt the operation. Common reasons for being unable to open the file include providing the wrong name, having insufficient authorization to open the file and not being the file's owner.

ANR78 Unable to open 06W file file. (Linux)

Explanation

The server was unable to open the indicated file.

System action

The operation that was to use the indicated file fails. A subsequent unnumbered message had details from the system.

User response

Determine the reason for being unable to open the file and re-attempt the operation. Common reasons for being unable to open the file include providing the wrong name, having insufficient authorization to open the file and not being the file's owner.

ANR78 Unable to open 06W file file. (Windows)

Explanation

The server was unable to open the indicated file.

System action

The operation that was to use the indicated file fails. A subsequent unnumbered message had details from the system.

User response

Determine the reason for being unable to open the file and re-attempt the operation. Common reasons for being unable to open the file include providing the wrong name, having insufficient authorization to open the file and not being the file's owner. The file may be already opened by the server or another program.

ANR78 Unable to get 07W information for (AIX) file file.

Explanation

The server was unable to get information about the indicated file.

System action

The operation that was to use the indicated file fails. A subsequent, unnumbered message has details from the system.

User response

Determine the reason for being unable to access the file and re-attempt the operation. Common reasons for being unable to access

the file include providing the wrong name, having insufficient authorization to open the file and not being the file's owner.

ANR78 Unable to get 07W information for (Linux) file file.

Explanation

The server was unable to get information about the indicated file.

System action

The operation that was to use the indicated file fails. A subsequent, unnumbered message has details from the system.

User response

Determine the reason for being unable to access the file and re-attempt the operation. Common reasons for being unable to access the file include providing the wrong name, having insufficient authorization to open the file, not being the file's owner, or too many soft links to the file. If trying to access a RAW partition, the server must be started with superuser privileges.

ANR78 Oracle Library 07I Attach module (Windo module name ws) has been loaded.

Explanation

The module indicated has been successfully loaded. Operations involving this module may now be performed by the server.

System action

The server now supports ACSLS functions that depend on this module.

User response

None.

ANR78 root user 08W authority (AIX) required for non-default scheduling policy.

Explanation

The server was unable to use the scheduling policy specified in the options file. The server must be running with root authority to use any scheduling policy other than the default.

System action

Operation continues but with the default scheduling policy.

User response

Run the server with root authority or don't specify a scheduling policy in the options file.

ANR78 Oracle Library 08W Attach module (Windo module name ws) not available from the system.

Explanation

The server attempted to load the Library Attach module. However, this module is not installed to the system.

System action

Server operation continues, but without ACSLS function.

User response

Ensure that the Library Attach module is installed to the system.

ANR78 Using 09I scheduling (AIX) policy policy.

Explanation

All threads in the server will use the specified scheduling policy.

System action

Operations continue.

User response

None

ANR78 Unable to create 10W a new child (AIX) process.

Explanation

The server cannot create a new child thread.

System action

Server processing continues. Other error messages from the server component are displayed.

User response

Ensure that sufficient paging space is available for AIX. If the server has been started from a non-root user ID, ensure that the AIX process limit per user is sufficient for the server. The server requires approximately 24 processes, in addition to one process per client

session, and one process for each background operation. Each thread started by the server is an AIX process. To change the number of processes per user, use the SMIT menus for System Environment, and choose Change / Show Characteristics of Operating System. You may also use SMIT to determine if the number of applications is causing a memory shortage. It may be necessary to decrease the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR78 Error creating 10E console input (Linux) thread.

Explanation

Unable to start console input thread.

System action

Server operation stops.

User response

See other issued messages.

ANR78 Using instance 11I directory (AIX) instance directory.

Explanation

The server is operating out of the indicated directory.

System action

Server processing continues.

User response

None.

ANR78 11E Insufficient memory for (Linux) console initialization.

Explanation

The server is unable to allocate enough memory for console initialization.

System action

Server operation stops.

User response

Ensure that there is sufficient paging space. It may be necessary to reduce the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR78 12E Insufficient memory to (Linux) buffer console input. The following input line was discarded: *discarded console input.*

Explanation

An error occurs during an attempt to allocate a buffer to hold the specified console input.

System action

The console input is discarded.

User response

Ensure that there is sufficient paging space. It may be necessary to reduce the maximum number of client

sessions by changing the MAXSESSIONS option in the server options file.

ANR78 13W The server mode-bit server (AIX) is not supported on a kernel mode-bit kernel.

Explanation

The 32-bit server is supported only when running with the 32-bit kernel, and the 64-bit server is supported only when running the 64-bit kernel.

System action

Server processing continues.

User response

You must match the server mode with the kernel mode by either switching the kernel mode or installing the correct server fileset.

ANR78 13W Unable to create a new child (Linux) thread.

Explanation

The server cannot create a new child thread.

System action

Server processing continues. Other error messages from the server component are displayed.

User response

Ensure that sufficient swap space is available for Solaris. The amount of swap available can be obtained by executing 'swap -l'. If the number of free blocks is low, you

can add swap files while the system is running by executing 'mkfile' and then 'swap -a'. See the Solaris man pages on 'mkfile' and 'swap' for more details.

If the server has been started from a non-root user ID, ensure that the process limit per user is sufficient to accommodate the server. You can tune the 'maxusers=##' parameter in the /etc/system file to increase the number of users that can be on the system at one time. This will also force the kernel to allocate more memory/swap for user-processes.

A system reboot with the 'reconfigure' option is required for the new user settings to take effect. It may be necessary to decrease the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR78 14I Using instance directory (Linux) instance directory.

Explanation

The server is operating out of the indicated directory.

System action

Server processing continues.

User response

None.

ANR78 20E Insufficient (AIX) memory to buffer console input; the

following input line was discarded: *discarded console input.*

Explanation

An error occurs during an attempt to allocate a buffer large enough to read console input.

System action

The console input is discarded.

User response

Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. It may be necessary to decrease the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR78 20S Thread thread ID terminated in (Linux) response to program abort.

Explanation

The thread has ended due to a program abort.

System action

The server completes termination processing.

User response

Note the associated messages and call your service representative.

ANR78 20W Insufficient Space Available (Windows) for file name.

Explanation

The server was attempting to create a file with the indicated name. There was insufficient space for the file on the disk.

System action

Server processing continues. The file creation request fails.

User response

Free additional space on the drive to accomodate the file, specify a file name on a drive with sufficient space, or change the space request to a value consistent with the drive. Retry the operation.

ANR78 Thread thread 21I ID terminated in (Linux) response to external signal.

Explanation

The thread has ended due to an external signal.

System action

The server completes termination processing.

User response

None.

ANR78 Unable to create 21W directory when (Windo creating volume ws) file name.

Explanation

The server was attempting to create a file with the indicated name. A new directory was being created as well, but its creation failed.

System action

Server processing continues. The file creation request fails.

User response

Specify a file name in an existing directory or change the name request to specify a different directory name.

ANR78 Error creating 22E console input (AIX) thread.

Explanation

Unable to start console input thread.

System action

Server operation stops.

User response

See other issued messages.

ANR78 Thread thread 22I ID terminated in (Linux) response to server shutdown.

Explanation

The thread has ended due to a server shutdown.

System action

The server completes termination processing.

User response

None.

ANR78 File Already 22W exists when (Windo creating volume ws) file name.

Explanation

The server was attempting to create a file with the indicated name. The file already exists.

System action

Server processing continues. The file creation request fails.

User response

Specify a new file name. The server will not use an existing file name when creating a file.

ANR78 Insufficient 23E memory for (AIX) console initialization.

Explanation

Unable to allocate enough memory for console initialization.

System action

Server operation stops.

User response

Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. It may be necessary to decrease the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR78 Internal error 23S internal error (Linux) detected.

Explanation

An internal error is detected during server initialization or operation.

System action

Server operation stops.

User response

Retry the failing operation. If the operation fails again, review additional information that is available for this message: Search for "ANR7823S" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR78 Unable to create 23W file file name. (Windo ws)

Explanation

The server was attempting to create a file with the indicated name. The system reported an error in creating the file.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name.

ANR78 Error loading 24E Async I/O (AIX) support module.

Explanation

The server attempted to load the Async I/O support module, but the load failed. Refer

to accompanying error message for details on the load failure.

System action

Server operation continues, but without Async I/O support.

User response

Ensure that the correct support module exists in the server bin directory and that the aio subsystem has been configured on AIX, and that AIX was rebooted after the configuration.

ANR78 Server 24S operation (Linux) terminated.

Explanation

An error occurs that causes server operation to stop.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 Unable to write 24W volume file (Windows) name.

Explanation

The server was attempting to create a file with the indicated name. The server was able to partially write to the file before running out of space.

System action

The server continues processing. The file

creation request fails. The file is still present on the system.

User response

Specify a new file name where there is sufficient space.

ANR78 Server unable to 25E allocate a (Linux) shared memory segment of size Client requested shared memory size.

Explanation

A shared memory client has requested a shared memory segment size that Solaris is unable to fulfill.

System action

Client is not allowed to logon

User response

See the shared memory tuning guide for Solaris (an Oracle document). You may need to increase the number/size of shared memory segments and/or message queues.

ANR78 Unable to create 25W volume file (Windows) name. Return code= return code.

Explanation

The server was attempting to create a file with the indicated name. The attempt failed with the indicated return code. The return code is an internal code from the server.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name. The return code may also be provided to your service representative for interpretation.

ANR78 Creation of 26W Volume file (Windows) name failed. Process was cancelled.

Explanation

The server was attempting to create a file with the indicated name. The attempt was cancelled by a cancel process command.

System action

The server continues processing. The file creation request fails.

User response

The DEFINE command may be re-entered.

ANR78 Invalid RAW 30E Partition Name: (Linux) A valid raw partition name is in the form of /dev/.../rdsk/.../* , where ... means 0 or more directories.

Explanation

Use the proper format for specifying a Raw partition. The ... means zero or more directories.

System action

Inform the user to use the right RAW partition specification.

User response

Have user reenter the RAW partition with the proper partition name.

ANR78 raw partition 31E name has an (Linux) existing filesystem.

Explanation

The RAW partition specified has an existing Solaris file system on it. Writing to this Partition may/and most likely will destroy this filesystem.

System action

Warn the user that an existing filesystem for the raw partition specified may be destroyed if written to.

User response

Determine if user still wants the valid filesystem data. If not, user needs to destroy the filesystem by either formatting the partition, create a program to destroy the filesystem header information so that the server will not be able to detect the filesystem header information, or rearrange the starting and ending blocks of a partition by using the Solaris format() command. The user can read the format() function in the Oracle manuals for further details on filesystems.

ANR78 32I (AIX) The thread process ID terminated with exit code program exit code.

Explanation

The process has ended with the indicated exit code. This error is due to the problem caused and indicated by a preceding message.

System action

The server completes termination processing.

User response

None.

ANR78 32E (Linux) raw partition name corresponds to a protected filesystem, such as / or /usr.

Explanation

The RAW partition specified has an existing file system on it. This filesystem is the / or /usr partition. If the SERVER writes to it, it will most likely crash the whole operating system.

System action

Disallow access to this raw partition.

User response

Have user specify another RAW partition that is not the / or /usr. It may be possible that this is not the actual / or /usr partition of the boot disk. Check, using the Solaris `format()` command, if

your partition name tag is labeled incorrectly as / or /usr.

ANR78 33S (AIX) The process thread ID terminated in response to program abort.

Explanation

The thread has ended due to a program abort.

System action

The server completes termination processing.

User response

None.

ANR78 33E (Linux) symbolic links has too many symbolic links - the maximum allowable is 10.

Explanation

The file specified has too many symbolic links. The server will follow at most 10 links before ending this symbolic link name resolution.

System action

Disallow access to this file.

User response

Have the user specify the actual file, where the file is not a symbolic link. Using `ls -l`, one can see if the file is a symbolic link.

ANR78 34I (AIX) The thread thread ID terminated in response to external signal.

Explanation

The thread has ended due to an external signal.

System action

The server completes termination processing.

User response

None.

ANR78 34E (Linux) Specified raw partition name raw partition cannot contain the 0th disk cylinder.

Explanation

The raw partition specified has the 0th disk cylinder. The server should not be allowed to write into the 0th cylinder. If allowed, the disk label would be corrupted.

System action

Disallow access to this raw partition.

User response

Have the system administrator change the starting cylinder of this partition to a number greater than 0.

ANR78 34I (Windows) The server thread thread ID (tid Windows NT thread ID) terminated in response to external signal.

Explanation

The thread has terminated due to an external signal.

System action

The server completes termination processing.

User response

None.

ANR78 35I (AIX) The server thread thread ID terminated in response to server shutdown.

Explanation

The thread has ended due to a server shutdown.

System action

The server completes termination processing.

User response

None.

ANR78 35E (Linux) Specified raw partition name raw partition is too big for this operating system to handle.

Explanation

The raw partition specified has greater than 2GB and the operating system is running below Solaris 2.6. Operating system below Solaris 2.6 cannot handle files natively more than 2GB. For operating system that is at Solaris 2.6 or above, the limit is 1TB.

System action

Disallow access to this raw partition.

User response

Have the system administrator change the RAW partition size to be less than 2GB (4194303 512-byte disk blocks) for Solaris 2.5.1 or below, less than 1TB (2147483647 512-byte disk blocks) for Solaris 2.6 and above.

ANR78 35I The server thread *thread ID* (Windows NT *thread ID*) terminated in response to server shutdown.

Explanation

The thread has terminated due to a server shutdown.

System action

The server completes termination processing.

User response

None.

ANR78 36S Server initialization (AIX) terminated.

Explanation

An error occurs that causes server initialization to end.

System action

Server operation stops.

User response

Review additional information that is available for this message: Search for "ANR7836S" in the product

information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR78 37S Internal error *internal error* (AIX) was detected.

Explanation

An internal error was detected during server initialization or operation.

System action

The server stops.

User response

You must extend the log file when you receive ANR7837S, LOGSEG871 errors.

Review additional information that is available for this message: Search for "ANR7837S" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR78 37S Internal error *internal error* (Windows) was detected.

Explanation

An internal error was detected during server initialization or operation.

System action

The server stops.

User response

You must extend the log file when you receive ANR7837S, LOGSEG871 errors.

Review additional information that is available for this message: Search for "ANR7837S" in the product information (<http://www.ibm.com/support/knowledgecenter/SSEQVQ/>).

ANR78 38S Server operation (AIX) terminated.

Explanation

An error occurs that causes server operation to stop.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 41S Insufficient kernel memory (AIX) available.

Explanation

An error occurs due to insufficient kernel memory.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 42S Monitor kernel extension not (AIX) initialized.

Explanation

The monitor kernel extension is not initialized.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 43W Unable to determine real (AIX) memory size.

Explanation

The server checks the amount of real memory in the system to optimize use of storage in the database buffer pool. The server uses Object Data Manager (ODM) to determine how much real memory is installed on the system. The routines used to call ODM failed or were unable to return the real memory size.

System action

Server operation continues. The server allows the data base buffer pool size to grow without taking into account real memory.

User response

The server may need to run as a root user to obtain this information.

ANR78 43W Unable to determine real (Linux) memory size.

Explanation

The server checks the amount of real memory in the system to optimize use of storage in the database buffer pool. The server uses Object Data Manager (ODM) to determine how much real memory is installed on

the system. The routine s used to call ODM failed or were unable to return the real memory size.

System action

Server operation continues. The server allows the data base buffer pool size to grow without taking into account real memory.

User response

The server may need to run as a root user to obtain this information.

ANR78 Unable to 43W determine real (Window memory size. ws)

Explanation

The server checks the amount of real memory in the system to optimize use of storage in the database buffer pool. The routines used to obtain this information returned a failing return code or were unable to return the real memory size.

System action

Server operation continues. The server allows the data base buffer pool size to grow without taking into account real memory.

User response

The server may need to run as a root user to obtain this information.

ANR78 Server 49I operation terminated - (AIX) kernel extension has been reset.

Explanation

The kernel extension has been reinitialized by the server in response to a previous condition for which a message has been issued.

System action

Server operation stops.

User response

None.

ANR78 The process 50I process ID has (AIX) terminated on signal signal number (signal name).

Explanation

The specified process has ended due to the specified signal.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 Error resetting 51S handler for (AIX) signal signal number (signal name).

Explanation

An error occurs resetting the specified signal handler.

System action

Server operation stops.

User response

Contact your service representative.

ANR78 The current 52I process affinity (Window mask is: 0xThe ws) process affinity mask..

Explanation

The server is running on the processors indicated by the mask.

System action

Server operation continues.

User response

None.

ANR78 Could not obtain 53W the current (Window process affinity ws) mask. Reason: NT return code..

Explanation

A problem was encountered while obtaining the current process affinity.

System action

Server operation continues.

User response

None.

ANR78 The process 54W affinity mask (Window 0xAffinity ws) mask.) specified in dsmserv.opt is out of range.

Explanation

The affinity mask value was out of range.

System action

Server operation continues.

User response

None.

ANR78 Could not set 55W new process (Window affinity mask. ws) Reason: NT return code.

Explanation

A problem was encountered in setting a new process affinity mask.

System action

Server operation continues.

User response

None.

ANR78 The affinity 56W mask (0xNT (Window return code.) ws) was set to a value other than what was requested

Explanation

A new affinity mask was set but on verification it was found not to match what was requested.

System action

Server operation continues.

User response

None.

ANR78 Error reading 59W from standard (AIX) input.

Explanation

An error occurs during an attempt to read from standard input.

System action

The console input thread is terminated.

User response

This is normal if the server is running as part of the installation, in a cron job, or is started in the background. This can occur if the server is started in a telnet or ssh session and that session is killed effectively creating a background process. If this is unintended, stop the server and restart in the foreground.

ANR78 Error reading 59W from standard (Linux) input.

Explanation

An error occurs during an attempt to read from standard input.

System action

The console input thread is terminated.

User response

This is normal if the server is running as part of the installation, in a cron job, or is started in the background. This can occur if the server is started in a telnet or ssh session and that session is killed effectively creating a background process. If this is unintended, stop the server and restart in the foreground.

ANR78 Insufficient 60W Space Available (AIX) for file file name.

Explanation

The server was attempting to create a file with the indicated name. There was insufficient space for the file in the filesystem.

System action

The server continues processing. The file creation request fails.

User response

Free additional space on the drive to accommodate the file, specify a file name on a drive with sufficient space, or change the space request to a value consistent with the drive. Retry the operation.

ANR78 Insufficient 60W Space Available (Linux) for file file name.

Explanation

The server was attempting to create a file with the indicated name. There was insufficient space for the file in the filesystem.

System action

The server continues processing. The file creation request fails.

User response

Free additional space on the drive to accommodate the file, specify a file name on a drive with sufficient space, or change the space request to a value consistent with the drive. Retry the operation.

ANR78 Unable to create 61W directory when creating volume file name.

Explanation

The server was attempting to create a file with the indicated name. A new directory was being created as well, but its creation failed.

System action

The server continues processing. The file creation request fails.

User response

Specify a file name in an existing directory or or change the name request to specify a different directory name.

ANR78 Unable to create 61W directory when (Linux) creating volume file name.

Explanation

The server was attempting to create a file with the indicated name. A new directory was being created as well, but its creation failed.

System action

The server continues processing. The file creation request fails.

User response

Specify a file name in an existing directory or or change the name request to specify a different directory name.

ANR78 File Already 62W exists when (AIX)

creating volume file name.

Explanation

The server was attempting to create a file with the indicated name. The file already exists.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name. The server will not use an existing file name when creating a file.

ANR78 File Already 62W exists when (Linux) creating volume file name.

Explanation

The server was attempting to create a file with the indicated name. The file already exists.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name. The server will not use an existing file name when creating a file.

ANR78 Unable to create 63W file file name. (AIX)

Explanation

The server was attempting to create a file with the indicated name. The system reported an error in creating the file.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name.

ANR78 Unable to create 63W file *file name*. (Linux)

Explanation

The server was attempting to create a file with the indicated name. The system reported an error in creating the file.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name.

ANR78 Unable to write 64W volume file (AIX) *name*.

Explanation

The server was attempting to create a file with the indicated name. The server was able to partially write to the file before running out of space.

System action

The server continues processing. The file creation request fails. The file is still present on the system.

User response

Specify a new file name where there is sufficient space.

ANR78 Unable to write 64W volume file (Linux) *name*.

Explanation

The server was attempting to create a file with the indicated name. The server was able to partially write to the file before running out of space.

System action

The server continues processing. The file creation request fails. The file is still present on the system.

User response

Specify a new file name where there is sufficient space.

ANR78 Unable to create 65W volume file (AIX) *name*. Return code=*return code*.

Explanation

The server was attempting to create a file with the indicated name. The attempt failed with the indicated return code. The return code is an the server internal code.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name. The return code may also be provided to your service representative for interpretation.

ANR78 Unable to create 65W volume file (Linux) *name*. Return code=*return code*.

Explanation

The server was attempting to create a file with the indicated name. The attempt failed with the indicated return code. The return code is an internal code from the server.

System action

The server continues processing. The file creation request fails.

User response

Specify a new file name. The return code may also be provided to your service representative for interpretation.

ANR78 Creation of 66W Volume file (AIX) *name* failed. Process was cancelled.

Explanation

The server was attempting to create a file with the indicated name. The attempt was cancelled by a cancel process command.

System action

The server continues processing. The file creation request fails.

User response

The DEFINE command may be re-entered.

ANR78 Creation of 66W Volume file (Linux) *name* failed. Process was cancelled.

Explanation

The server was attempting to create a file with the indicated name. The attempt was cancelled by a cancel process command.

System action

The server continues processing. The file creation request fails.

User response

The DEFINE command may be re-entered.

ANR78 *file name* is not 67I a multiple of disk block size (AIX) *block size*. File size is *file size*, but usable space is rounded down to *usable file size*.

Explanation

The server was attempting to open a random access file with the indicated name. The usable space was rounded down to the indicated value so that the amount of space is an even multiple of the disk block size. This facilitates improved performance in reading and writing the file.

System action

The server continues processing. Some space in the file will go unused.

User response

No action is required. To use all space in the file, server utilities can be used to offload existing data to other volumes. The volume can then be deleted and re-created using a multiple of the disk's block size.

ANR78 67I (Linux) *file name is not a multiple of disk block size block size. File size is file size, but usable space is rounded down to usable file size.*

Explanation

The server was attempting to open a random access file with the indicated name. The usable space was rounded down to the indicated value so that the amount of space is an even multiple of the disk block size. This facilitates improved performance in reading and writing the file.

System action

The server continues processing. Some space in the file will go unused.

User response

No action is required. To use all space in the file, server utilities can be used to offload existing data to other volumes. The volume can then be deleted and re-created using a multiple of the disk's block size.

ANR78 68E (AIX) *The server is unable to open or lock the file name file.*

Explanation

The server attempted to open or lock the instance lock file. The open or lock operation failed.

System action

Server initialization fails.

User response

Ensure that the server is being initialized from the correct instance directory and that this server instance is not running. Ensure that the instance owner has appropriate permissions to read and write files on the specified path.

ANR78 68E (Linux) *The server is unable to open or lock the file name file.*

Explanation

The server attempted to open or lock the instance lock file. The open or lock operation failed.

System action

Server initialization fails.

User response

Ensure that the server is being initialized from the correct instance directory and that this server instance is not running. Ensure that the instance owner has appropriate permissions to read and write files on the specified path.

ANR78 69W (AIX) *Unable to create volume file name with a format size of format size megabytes.*

Explanation

The server created a volume with the indicated name, but the size of the volume is less than the specified format size.

System action

The server continues processing. The volume is created, but the format size is not correct.

User response

Due to an environment limitation on the operating system, the format size of the volume is less than the size that was specified. Update the operating system environment limitation and issue the command again.

ANR78 69W (Linux) *Unable to create volume file name with a format size of format size megabytes.*

Explanation

The server created a volume with the indicated name, but the size of the volume is less than the specified format size.

System action

The server continues processing. The volume is created, but the format size is not correct.

User response

Due to an environment limitation on the operating system, the format size of the volume is less than the size that was specified. Update the operating system environment limitation and issue the command again.

ANR78 70W (AIX) *Unable to initialize odm query. Error message from odm is odm message.*

Explanation

The server uses the AIX Object Data Manager (ODM) to check information about AIX. For example, the server uses ODM to determine how much real memory is installed on the system. The routine used to initialize an ODM query failed. ODM returned an error message as indicated.

System action

Server operation continues. The server makes assumptions concerning information it could not obtain.

User response

The server may need to run as a root user to obtain this information.

ANR78 71W (AIX) *Unable to complete odm query. Error message from odm is odm message.*

Explanation

The server uses the AIX Object Data Manager (ODM) to check information about AIX. For example, the server uses ODM to determine how much real memory is installed on the system. The routine used to perform an ODM query failed. ODM returned an error message as indicated.

**ANR Messages
08001-10000**

ANR81 95I (AIX) The SSL TCP/IP Version 4 driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR81 95I (Linux) The SSL TCP/IP Version 4 driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues. The server makes assumptions concerning information it could not obtain.

User response

The server may need to run as a root user to obtain this information.

System action

Server operation continues.

User response

None.

ANR81 95I (Windows) The SSL TCP/IP Version 4 driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR81 96I (AIX) The SSL TCP/IP administrative driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR81 96I (Linux) The SSL TCP/IP administrative driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR81 96I (Windows) The SSL TCP/IP administrative driver is ready for connection with clients on port *port number*.

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP

protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR81 98E (AIX) The SSL environment was not established. The GSK module *gsk* return code is *gsk* string error.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Stop and restart the server.

ANR81 98E (Linux) The SSL environment was not established. The GSK module *gsk* return code is *gsk* string error.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Stop and restart the server.

ANR81 98E The SSL environment was not established. The GSK module *gsk* module return code is *gsk* return code *gsk* string error.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Stop and restart the server.

ANR81 99E The SSL TCP/IP driver was not initialized on port *port* number.

Explanation

A problem with the SSL environment prevents IBM Storage Protect from establishing the SSL protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR81 99E The SSL TCP/IP driver was not initialized on port *port* number.

Explanation

A problem with the SSL environment prevents IBM Storage Protect from establishing the SSL protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR81 99E The SSL TCP/IP driver was not initialized on port *port* number.

Explanation

A problem with the SSL environment prevents IBM Storage Protect from establishing the SSL protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR82 00I TCP/IP Version 4 driver ready for connection with clients on port *port* number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 00I TCP/IP Version 4 driver ready for connection with clients on port *port* number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 00I TCP/IP Version 4 driver ready for connection with clients on port *port* number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 01W Unable to initialize TCP/IP driver - insufficient memory.

Explanation

Because the operating system rejects a memory allocation request, the server cannot start communications through TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. It may be necessary to decrease the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR82 01E Unable to initialize TCP/IP driver - socket creation failed; error error code.

Explanation

The server is unable to initialize the TCP/IP driver

due to a socket creation error.

System action

Server operation continues, but TCP/IP support is inoperative.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not active on your system, you must activate it; then halt and restart the server.

ANR82 01W (Windows) Unable to initialize TCP/IP driver - insufficient memory.

Explanation

The server is unable to communicate by way of TCP/IP. A memory allocation request has been rejected by the operating system.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory.

ANR82 02W (AIX) Unable to initialize TCP/IP driver - error creating acceptor socket. Reason code reason code.

Explanation

Because TCP/IP rejects a request for a socket on which to listen, the server cannot start communications through TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not started, use the HALT command from a server prompt to stop the server and restart it.

ANR82 02E (Linux) TCP/IP driver unable to initialize due to error in using port TCP port number; error error code.

Explanation

The server is unable to initialize the TCP/IP driver due to a socket binding error.

System action

Server operation continues, but TCP/IP support is inoperative.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not active on your system, you must activate it; then halt and restart the server. This message may also result from more than one server running on the same machine with the same TCP/IP port number. Make sure that the dsmserv.opt file TCPPort option is different for each server. Make sure TCPPORT and TCPADMINPORT do not specify or default to the same values.

ANR82 02W (Windows) Unable to initialize TCP/IP driver - error creating acceptor socket. Reason code reason code.

Explanation

The server is unable to communicate by way of TCP/IP. TCP/IP has rejected a request for a socket on which the server listens.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not

started, issue the HALT command to stop the server, and then restart the server.

ANR82 03W (AIX) Unable to establish TCP connection - accept error.

Explanation

The server cannot accept a client session due to a failure in TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not started, use the HALT command from a server prompt to terminate the server and restart it.

ANR82 03E (Linux) Unable to initialize TCP/IP driver - listen operation failed; error error code.

Explanation

The server is unable to initialize the TCP/IP driver due to a socket listen error.

System action

Server operation continues, but TCP/IP support is inoperative.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not active on your system, you must activate it; then halt and restart the server.

ANR82 03W Unable to establish TCP (Windows) connection - accept error.

Explanation

The server cannot accept a client session due to failure in TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not started, issue the HALT command to stop the server, and then restart the server.

ANR82 04W Unable to establish TCP (AIX) connection - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues, but the session request for this session fails.

User response

Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. You may also decrease the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 04E Unable to initialize TCP/IP (Linux) driver - thread creation failed.

Explanation

The server is unable to initialize the TCP/IP driver due to an error creating a server thread.

System action

Server operation continues, but TCP/IP support is inoperative.

User response

This error often results from a lack of memory. Ensure that your system has sufficient paging space to support the current activities.

ANR82 04W Unable to establish TCP (Windows) connection - insufficient memory.

Explanation

The server is unable to accept a client session due to a memory allocation request failure.

System action

Server operation continues, but the session request for this session fails.

User response

Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 05W Unable to establish TCP (AIX) connection - server HALT in progress.

Explanation

The server cannot accept a client session due to server HALT processing that is in progress.

System action

Server operation continues, but the session request for this session fails.

User response

None.

ANR82 05E Terminating TCP/IP driver - (Linux) socket accept operation failed; error error code.

Explanation

The server is unable to initialize the TCP/IP driver due to a socket accept error.

System action

Server operation continues, but TCP/IP support is inoperative.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not active on your system, you must activate it; then halt and restart the server.

ANR82 05W Unable to establish TCP (Windows) connection - server HALT in progress.

Explanation

The server is unable to accept a client session due to server HALT processing that is in progress.

System action

Server operation continues, but the session request for this session fails.

User response

None.

ANR82 06W (AIX) *Socket (session number) closed abruptly.*

Explanation

The server detects that the indicated session on the specified TCP/IP socket is closed outside of the server.

System action

Server operation continues, but the session is ended.

User response

None.

ANR82 06E (Linux) *Unable to establish TCP/IP session - invalid host address IP host address (port port number).*

Explanation

The server is unable to establish a session because the designated address or port number is not valid.

System action

Server operation continues.

User response

Ensure that the specified host name is valid and is accessible over the network. If the TCPCLIENTPort option is specified for the remote system, ensure it does not conflict with another application.

ANR82 06I *TCP/IP Version 4 administrative driver ready for*

(Windows) *connection with clients on port port number.*

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 07W (AIX) *TCP/IP driver unable to initialize due to socket initialization error. Reason code reason code.*

Explanation

While initializing TCP/IP communications, the server fails to set up an interface with TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP has been started and is active on your system. You may issue the TCP/IP ping command to your own address to verify that TCP/IP is both started and active.

ANR82 07E (Linux) *Unable to establish TCP/IP session with IP host address due to memory shortage.*

Explanation

The server is unable to establish a session because of a memory shortage condition.

System action

Server operation continues.

User response

Ensure that your system has sufficient paging space to support the current level of system activities.

ANR82 07W (Windows) *TCP/IP driver unable to initialize due to socket initialization error. Reason code reason code.*

Explanation

While initializing TCP/IP communications, the server has failed to set up an interface with TCP/IP for Windows.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is properly installed on your system. Ensure that

TCP/IP has been started on your system. Issue the TCP/IP ping command to your own address to verify that TCP/IP is both installed and active.

ANR82 08W (AIX) *TCP/IP driver unable to initialize due to error in using port port, reason code reason code.*

Explanation

While initializing TCP/IP communications, the server fails to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that no other application is using the port number specified in the server options file with the TCPPORT option by issuing the TCP/IP netstat command. If the server was brought down and client sessions were active, it may be necessary to terminate the client sessions on the client systems before the port can be freed.

ANR82 08E (Linux) *Unable to establish TCP/IP session with IP host address - socket creation failed; error error code.*

Explanation

The server is unable to establish a session because of a socket creation error.

System action

Server operation continues.

User response

Ensure that TCP/IP is operational on your system by using the ping command with your TCP/IP address as a target. If TCP/IP is not active on your system, you must activate it; then halt and restart the server.

ANR82 TCP/IP driver 08W unable to (Windows) initialize due to error in using Port port, reason code reason code.

Explanation

While initializing TCP/IP communications, the server has failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that no other application is using the port number specified in the server options file

with the TCP/PORT option. If the server is brought down and then started immediately, you may be within the TCP/IP one minute timeout period for port reuse. Bring down the server, wait one minute, and then restart the server. If that does not work, it may be necessary to restart Windows.

ANR82 TCP/IP driver 09W unable to (AIX) initialize due to error in LISTENing on the specified Port, reason code reason code.

Explanation

While attempting to listen for session requests from clients using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP listen API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is running properly by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 Unable to 09E establish (Linux) TCP/IP session with IP host address - connection refused.

Explanation

The server is unable to establish a session because the remote system refused the connection request.

System action

Server operation continues.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP. Ensure that the client options file specifies the correct TCP/Server address and TCP/Port of the server you are attempting to contact.

ANR82 TCP/IP driver 09W unable to (Windows) initialize due to error in LISTENing on the specified Port, reason code reason code.

Explanation

While attempting to listen for session requests from clients using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP listen API.

System action

Server operation continues, but the

server cannot accept additional sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is running properly. This may be done by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to correct this condition by restarting the server.

ANR82 TCP/IP driver is 10W terminating due to error in accepting a new session, reason code reason code.

Explanation

While attempting to accept a session request from a client using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP accept API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is running properly. This may be done by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 10E (Linux) Unable to establish TCP/IP session with IP host address - connection request timed out.

Explanation

The server is unable to establish a session because the remote system did not respond to the connection request.

System action

Server operation continues.

User response

Ensure the following:

- The specified remote system is operational and is properly configured to run TCP/IP.
- The client options file specifies the correct TCPServeraddress and TCPPort of the server you are attempting to contact.
- Necessary gateways and routers are functioning properly.

ANR82 10W (Windows) TCP/IP driver is terminating due to error in accepting a new session, reason code reason code.

Explanation

While attempting to accept a session request from a client using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP accept API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the TCP/IP protocol.

User response

Ensure that TCP/IP is running properly. This may be done by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 11W (AIX) TCP/IP driver is terminating due to error in creating a new thread.

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but TCP/IP communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. You may also decrease the maximum number of sessions that the server can accept with the MAXSESSIONS

option in the server options file.

ANR82 11E (Linux) Unable to establish TCP/IP session with IP host address - system/network unreachable.

Explanation

The server is unable to establish a session because the remote system or network is unreachable.

System action

Server operation continues.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP. Also, ensure that necessary gateways and routers are functioning properly.

ANR82 11W (Windows) TCP/IP driver is terminating due to error in creating a new thread.

Explanation

The server cannot initialize due its inability to create a new thread of execution.

System action

Server operation continues, but TCP/IP communications is inoperative.

User response

The most likely cause is a lack of memory.

Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 12W (AIX) Unable to resolve address for node name.

Explanation

The server attempts to obtain a TCP/IP address for the indicated node name. The attempt is unsuccessful.

System action

The attempt to communicate with the indicated node fails. Server operation continues.

User response

Ensure that the node name is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

ANR82 12E (Linux) Unable to establish TCP/IP session with IP host address - connect failed; error error code.

Explanation

The server is unable to establish a session because of a connection error.

System action

Server operation continues.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP.

**ANR82 Unable to
12W resolve address
(Windo for node name.
ws)**

Explanation

The server attempts to obtain a TCP/IP address for the indicated node name. The attempt is unsuccessful.

System action

The attempt to communicate with the indicated node fails. Server operation continues.

User response

Ensure that the node name is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

**ANR82 Session open
13W with node name
(AIX) timed out.**

Explanation

The server attempts to contact the indicated

node name. The attempt is unsuccessful.

System action

The attempt to communicate with the indicated node fails.

User response

Ensure that the node name is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

**ANR82 Socket Socket
13E identifier
(Linux) aborted due to
send error; error
error code.**

Explanation

The session between the server and the specified client system experienced a fatal error sending data.

System action

The session with the remote system is ended.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP.

**ANR82 Session open
13W with node name
(Windo timed out.
ws)**

Explanation

The server attempts to contact the indicated node name. The attempt is unsuccessful.

System action

The attempt to communicate with the indicated node fails.

User response

Ensure that the node name is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

**ANR82 Session open
14E with IP host
(AIX) address failed
due to
connection
refusal.**

Explanation

The server is unable to establish a session because the remote system refused the connection request.

System action

Server operation continues.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP. Ensure that the client options file specifies the correct TCPServeraddress and TCPPort of the server you are attempting to contact.

**ANR82 Session
14E terminated
(Linux) when no data
was read on
socket socket
number.**

Explanation

The server is unable to read data on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that the client and server can communicate through such means as Telnet or FTP applications, which are part of the TCP/IP suite.

**ANR82 Session open
14E with IP host
(Windo address failed
ws) due to
connection
refusal.**

Explanation

The server is unable to establish a session because the remote system refused the connection request.

System action

Server operation continues.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP. Ensure that the client options file

specifies the correct TCPServeraddress and TCPPort of the server you are attempting to contact.

ANR82 Session open 15W with IP host (AIX) address failed as unreachable.

Explanation

The server is unable to establish a session because the remote system is unreachable.

System action

Server operation continues.

User response

Ensure that the IP host address is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

ANR82 Session Session 15E identifier (Linux) aborted due to receive error; error error code.

Explanation

The session between the server and the specified client system experienced a fatal error receiving data.

System action

The session with the remote system is ended.

User response

Ensure that the specified remote system is operational and is properly configured to run TCP/IP.

ANR82 Session open 15W with IP host (Windo address failed ws) as unreachable.

Explanation

The server is unable to establish a session because the remote system is unreachable.

System action

Server operation continues.

User response

Ensure that the IP host address is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

ANR82 The server 16W experienced a (AIX) TCP/IP error while sending data on socket socket number. Reason return code.

Explanation

A communication error occurred on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise,

ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 Unable to 16E establish (Linux) TCP/IP session with IP host address due to thread creation error.

Explanation

The server is unable to establish a session because of an error creating a thread.

System action

Server operation continues.

User response

Ensure that your system has sufficient paging space to support the current level of system activities.

ANR82 Error sending 16W data on socket (Windo socket number. ws) Reason return code.

Explanation

The server experiences an error return code from TCP/IP while sending data over the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that the client and server can communicate through such means as Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 The server 17W experienced a (AIX) TCP/IP error while receiving data on socket socket number. Reason return code.

Explanation

A communication error occurred on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise, ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 Unable to 17W initialize TCP/IP (Linux) driver - insufficient memory.

Explanation

Because the operating system rejects a memory allocation request, the server cannot start communications through TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the TCP/IP protocol.

User response

Ensure that sufficient paging space is available for Solaris. You may also use `ps -ef` to determine if the number of applications is causing a memory shortage. It may be necessary to decrease the maximum number of client sessions by changing the `MAXSESSIONS` option in the server options file.

ANR82 17W (Window) Error receiving data on socket *socket number*. Reason return code.

Explanation

The server experiences an error return code from TCP/IP while receiving data on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that the client and server can communicate through such means as Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 18W (AIX) Session terminated when no data was read on socket *socket number*.

Explanation

The server is unable to read data on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that the client and server can communicate through such means as Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 18W (Linux) Unable to resolve address for *node name*.

Explanation

The server attempts to obtain a TCP/IP address

for the indicated node name. The attempt is unsuccessful.

System action

The attempt to communicate with the indicated node fails. Server operation continues.

User response

Ensure that the node name is properly specified and that it is accessible over the network. Use the TCP/IP ping command for this purpose.

ANR82 18W (Windows) Session terminated when no data read on socket *socket number*.

Explanation

The server cannot read on the indicated socket. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that the client and server can communicate through such means as Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 19W (AIX) TCP/IP driver is unable to accept a new session with client at address *TCP/IP address* due to an error in creating a new thread.

Explanation

The server cannot accept a client session with the client at the indicated address due to an inability to create a new thread.

System action

Server operation continues, the session request fails.

User response

The most likely cause is lack of memory. Ensure that sufficient paging space is available for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. You may also decrease the maximum number of sessions that the server can accept with the `MAXSESSIONS` option in the server options file.

ANR82 19W (Linux) Unable to establish TCP connection - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues, but the session request for this session fails.

User response

Ensure that sufficient paging space is available for Solaris. You may also use 'swap -l' to determine the amount of swap available. You may also decrease the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 TCP/IP driver is 19W unable to accept (Window ws) a new session due to error in creating a new thread.

Explanation

The server cannot accept a client session due to the inability to create a new thread.

System action

Server operation continues, the session request fails.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may

also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 TCP/IP driver is 20W unable to set (AIX) the window size to TCPWindowSize for client session. The default value will be used.

Explanation

The server cannot set the window size for the indicated session to the requested size shown or cannot set the rfc1323 attribute when the window size is greater than 65535 bytes. The server uses the default window size for the indicated session. There may be a lack of memory for TCP/IP buffers.

System action

Server operation continues and the session continues with the default window size.

User response

Retry the session with a smaller window size in the options file. Issue the QUERY OPTION command to determine the setting of the server TCPWindowSize.

ANR82 TCP/IP driver is 20W unable to set (Linux) the window size to TCPWindowSize for client client. The default

value will be used.

Explanation

The server cannot set the window size for the indicated client to the requested size shown. The server uses the default window size for the indicated session. There may be a lack of memory for TCP/IP buffers.

System action

Server operation continues and the session continues with the default window size.

User response

Retry the session with a smaller window size in the options file. Issue the QUERY OPTION command to determine the setting of the server TCPWindowSize.

ANR82 TCP/IP driver is 20W unable to (Window ws) contact node name due to an output socket initialization error. Reason code reason code

Explanation

The server attempts to contact the indicated node name. The attempt is unsuccessful due to the inability to initialize a local socket.

System action

The attempt to communicate with the indicated node fails.

User response

Ensure that TCP/IP is operating properly on this node and that it can communicate remotely. Use the TCP/IP ping command for this purpose.

ANR82 TCP/IP driver is 21W unable to use (AIX) the TCP/IP NODELAY option for client client.

Explanation

The server cannot set TCP/IP NODELAY for the indicated client. The session proceeds with TCP/IP Delay processing in effect. This causes TCP/IP to buffer data prior to sending it to clients.

System action

Server operation continues and the session continues with the delay processing on.

User response

Further details for use in contacting your service representative can be obtained by issuing the following trace commands from an administrative session or from the server console (proper administrative authority is required): TRACE ENABLE TCPINFO TRACE BEGIN. After a session starts and displays message ANR8221W, issue the commands TRACE FLUSH TRACE END. This will create trace data in file tcptrace.out and will terminate the trace. This file should

be supplied to your service representative on request.

ANR82 TCP/IP driver is 21W unable to use (Linux) the TCP/IP NODELAY option for client *client*.

Explanation

The server cannot set TCP/IP NODELAY for the indicated client. The session proceeds with TCP/IP delay processing in effect. This causes TCP/IP to buffer data prior to sending it to clients.

System action

Server operation continues and the session continues with delay processing on.

User response

Further details for use when contacting your service representative can be obtained by issuing the following trace commands from an administrative session or from the console (proper administrative authority is required): TRACE ENABLE TCPINFO TRACE BEGIN tcptrace.out. After a session starts and displays message ANR8221W, issue the following commands: TRACE FLUSH TRACE END. This will create trace data in file tcptrace.out and will terminate the trace. This file should be supplied to your service representative on request.

ANR82 TCP/IP driver is 21W unable to set (Windows) the window size to TCPWindowSize for session *session*, client *client*. The default value will be used.

Explanation

The server cannot set the window size for the indicated session/client to the requested size shown. The server will use the default window size for the indicated session.

System action

Server operation continues and the session continues with the default window size.

User response

The most likely cause is lack of memory for TCP/IP buffers. You may retry with a smaller TCP window size in the options file. You can issue the QUERY OPTION command to display the current setting of the TCP window size.

ANR82 TCP/IP driver is 22W unable to set (AIX) the window size to TCPWindowSize for the server master socket. The default value will be used.

Explanation

The server cannot set the window size for the socket on which the

server listens to the requested size shown. The server uses the default window size for listening for sessions. There may be a lack of memory for TCP/IP buffers.

System action

Server operation continues with the default window size.

User response

Restart the server with a smaller window size in the options file if necessary. Issue the QUERY OPTION command to determine the setting of the server TCPWindowSize.

ANR82 Unable to 22W establish TCP (Linux) connection - server HALT in progress.

Explanation

The server cannot accept a client session due to server HALT processing that is in progress.

System action

Server operation continues, but the session request for this session fails.

User response

None.

ANR82 TCP/IP driver is 22W unable to use (Windows) the TCP/IP NODELAY option for client *client*.

Explanation

The server cannot set TCP/IP NODELAY for the indicated client. The session proceeds with TCP/IP Delay processing in effect. This causes TCP/IP to buffer data prior to sending it to clients.

System action

Server operation continues and the session continues with the delay processing on.

User response

Further details for use in contacting your service representative can be obtained by issuing the following trace commands from an administrative session or from the server console (proper administrative authority is required): TRACE ENABLE TCPINFO TRACE BEGIN tcptrace.out After a session starts and displays message ANR8222W, issue the following commands: TRACE FLUSH TRACE END This will create trace data in file tcptrace.out and will terminate the trace. This file should be supplied to your service representative on request.

ANR82 Unable to 23W connect to (AIX) remote system RemoteSystem due to unexpected return code ReturnCode

Explanation

The server was unable to connect to a remote system due to an unexpected return code from the connect Application Programming Interface. Common return code are handled with specific messages. This return code was unexpected.

System action

Server operation continues but the connection to the remote system fails.

User response

TCP/IP return code are listed in file `/usr/include/sys/errno.h` and may provide a pointer to the underlying problem. `/usr/include/sys/errno.h` is part of fileset `bos.adt.include`.

ANR82 TCP/IP driver is 23W unable to accept (Linux) a new session with client at address TCP/IP address due to an error in creating a new thread.

Explanation

The server cannot accept a client session with the client at the indicated address due to an inability to create a new thread.

System action

Server operation continues, the session request fails.

User response

The most likely cause is lack of memory. Ensure that sufficient paging space is available for Solaris. You may also use `ps -ef` to determine if the number of applications is causing a memory shortage. You may also decrease the maximum number of sessions that the server can accept with the `MAXSESSIONS` option in the server options file.

ANR82 Failed to 23W connect to (Window system) address address port port.

Explanation

The server attempted to contact the indicated node name at the specified port. The attempt is unsuccessful. The target port is not valid at the target node.

System action

The attempt to communicate with the indicated node fails. Server operation continues.

User response

Ensure that the node name still has TCP/IP running and that the client is active in `SCHEDULE` mode. If the server is attempting contact with the `SNMP` subagent, ensure that the hostname and port number for the subagent is correct in the server options file.

ANR82 TCP/IP 24W Administrative driver was unable to initialize due to error in using port port, reason code reason code.

Explanation

While initializing TCP/IP communications for administrative sessions, the server has failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP `bind` API.

System action

Server operation continues, but the server cannot accept administrative sessions from clients using the TCP/IP protocol. This also includes server to server sessions, storage agent to server sessions, and library client to server sessions.

User response

Ensure that no other application is using the port number specified in the server options file with the `TCPADMINPORT` or `TCPPORT` options. If the server was brought down and client sessions were active, it may be necessary to terminate the client sessions on the client systems before the port can be freed.

ANR82 TCP/IP driver is 24W unable to set (Linux) the window size to TCPWindowSize for the server

master socket. The default value will be used.

Explanation

The server cannot set the window size for the socket on which the server listens to the requested size shown. The server uses the default window size for listening for sessions. There may be a lack of memory for TCP/IP buffers.

System action

Server operation continues with the default window size.

User response

Restart the server with a smaller window size in the options file if necessary. Issue the `QUERY OPTION` command to determine the setting of the server `TCPWindowSize`.

ANR82 TCP/IP 24W Administrative driver was unable to initialize due to error in using Port port, reason code reason code.

Explanation

While initializing TCP/IP communications for administrative sessions, the server has failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP `bind` API.

System action

Server operation continues, but the server cannot accept administrative sessions from clients using the TCP/IP protocol. This also includes server to server sessions, storage agent to server sessions, and library client to server sessions.

User response

Ensure that no other application is using the port number specified in the server options file with the TCPADMINPORT option. If the server is brought down and then started immediately, you can be within the TCP/IP one minute timeout period for port reusage. Bring down the server, wait one minute, and then restart the server. If that does not work, it may be necessary to restart Windows.

ANR82 TCP/IP Version 25I 4 administrative (AIX) driver ready for connection with clients on port port number.

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 TCP/IP 25W Administrative (Linux) driver was unable to initialize due to error in using port port, reason code reason code.

Explanation

While initializing TCP/IP communications for administrative sessions, the server has failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept administrative sessions from clients using the TCP/IP protocol. This also includes server to server sessions, storage agent to server sessions, and library client to server sessions.

User response

Ensure that no other application is using the port number specified in the server options file with the TCPADMINPORT or TCPPPORT options. If the server was brought down and client sessions were active, it may be necessary to terminate the client sessions on the client systems before the port can be freed.

ANR82 TCP/IP Version 25I 6 driver ready (Windows) for connection with clients on port port number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 Error errno 26E detecting version of HBA-API library. (AIX)

Explanation

The server attempted to determine the level of the devices.common.IBM.fc.hba-api fileset and encountered an error.

System action

Server operation continues, but without accurate SAN device mapping.

User response

None.

ANR82 TCP/IP Version 26I 4 administrative (Linux) driver ready for connection with clients on port port number.

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 4 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 Unable to 26W initialize (Windows) NETBIOS driver on adapter network adapter number.

Explanation

The server cannot obtain sufficient NETBIOS resources to initialize communications on the indicated network adapter.

System action

Server operation continues, but the server will not accept sessions from clients that use the NETBIOS protocol.

User response

Ensure that NETBIOS is configured on the system. Ensure that all NETBIOS resources are not already in use. If the LAN Server or LAN Requester application is running, you have NETBIOS configured. In that case, starting the server prior to starting LAN Server or LAN Requester may allow the server to obtain the necessary NETBIOS resources.

ANR82 Fileset 27E devices.commo (AIX) n.IBM.fc.hba-api is not at the required level.

Explanation

The specified fileset is at a level that is incompatible with IBM Storage Protect operations. Install the latest maintenance for this fileset if you use SAN devices.

System action

Server operation continues, but without accurate SAN device mapping.

User response

None.

ANR82 27W (Linux) Unable to connect to remote system *RemoteSystem* due to unexpected return code *ReturnCode*

Explanation

The server was unable to connect to a remote system due to an unexpected return code from the connect Application Programming Interface. Common return code are handled with specific messages. This return code was unexpected.

System action

Server operation continues but the connection to the remote system fails.

User response

TCP/IP return code are listed in file `/usr/include/asm/errno.h` and

may provide a pointer to the underlying problem.

ANR82 27W (Windows) **NETBIOS connection terminated - insufficient memory, network adapter network adapter number.**

Explanation

The server cannot listen for client sessions on the specified network adapter due to a memory allocation request failure.

System action

Server operation continues, but the sessions will not be accepted on the specified adapter. Other network adapters remain unaffected.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory.

ANR82 28E (AIX) **Fileset devices.common.IBM.fc.hba-api is not installed on the system.**

Explanation

The specified fileset is required for the SAN discovery

operation. Install the latest maintenance for this fileset if the SANDISCOVERY option is set to ON.

System action

Server operation continues, but without accurate SAN device mapping.

User response

Install the latest version of the `device.common.IBM.fc.hba-api` fileset.

ANR82 28E (Linux) **Session Session identifier aborted due to an Aspera FASP read error; error error code : error code2 .**

Explanation

During the specified session between the server and its partner system, a communication error occurred while attempting to receive data.

System action

The session with the remote system ended.

User response

Ensure that the specified remote system is operational and is properly configured to run IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer.

ANR82 28W (Windows) **NETBIOS connection terminated - server HALT in progress.**

Explanation

The server cannot accept a client session due to server HALT processing that is in progress.

System action

Server operation continues, but the session request for this session fails.

User response

None.

ANR82 29E (Linux) **Session Session identifier aborted due to an Aspera write error; error error code : error code2 .**

Explanation

During the specified session between the server and its partner system, a communication error occurred while sending data.

System action

The session with the remote system ended.

User response

Ensure that the specified remote system is operational and is properly configured to run IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer.

ANR82 29W (Windows) **Unable to add server name to adapter network adapter number.**

Explanation

The server cannot initialize communications processing using the NETBIOS protocol on the indicated network adapter because the server name cannot be added as a NETBIOS name on the adapter.

System action

Server operation continues, but client sessions from clients using the NETBIOS protocol will not be accepted on this adapter. Other adapters are not affected.

User response

The most likely cause for this message is the presence of another system on the network that is using the same name for NETBIOS communications. This may be another server or client or a LAN Requester node. Changing or adding the NETBIOSNAME option for this adapter in your server options file and restarting the server may allow this adapter to be used with NETBIOS communications.

ANR82 TCP/IP Version 30I 6 driver ready (AIX) for connection with clients on port port number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 TCP/IP Version 30I 6 driver ready (Linux) for connection with clients on port port number.

Explanation

The server can now accept sessions with clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 Insufficient 30W memory to start (Windo NETBIOS ws) session on adapter network adapter number.

Explanation

The server cannot accept a client session due to a memory allocation request failure on the specified adapter.

System action

Server operation continues, but the session request fails.

User response

The most likely cause is a lack of memory. Ensure that there is

sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS or the NETBIOSSESSIONS option, or both, in the server options file.

ANR82 Unable to create 31W thread to accept (Windo NETBIOS ws) sessions.

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but NETBIOS communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the

server can accept with the MAXSESSIONS or the NETBIOSSESSIONS option, or both, in the server options file.

ANR82 Unable to create 32W thread to listen (Windo for NETBIOS ws) sessions on adapter network adapter number.

Explanation

The server cannot initialize due to the inability to create a new thread of execution to monitor the indicated network adapter.

System action

Server operation continues, but NETBIOS communications is inoperative on the indicated adapter. Other adapters remain unaffected.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS or the NETBIOSSESSIONS option, or both, in the server options file.

ANR82 33E (AIX) Unable to acquire local port information. getaddrinfo return code return code.

Explanation

The server or storage agent used the system getaddrinfo API to determine which TCP/IP protocols could be used. A failure occurred, as indicated by the system error code that is shown. The server was initializing TCP/IP communications.

System action

TCP/IP communications is inoperative.

User response

System information concerning return codes from the getaddrinfo system API should be consulted. Ensure that TCP/IP networking for either TCP/IP version 4 or version 6 is operating correctly.

ANR82 33E (Linux) Unable to acquire local port information. getaddrinfo return code return code.

Explanation

The server or storage agent used the system getaddrinfo API to determine which TCP/IP protocols could be used. A failure occurred, as indicated by the system error code that is shown. The server was initializing TCP/IP communications.

System action

TCP/IP communications is inoperative.

User response

System information concerning return codes from the getaddrinfo system API should be consulted. Ensure that TCP/IP networking for either TCP/IP version 4 or version 6 is operating correctly.

ANR82 33W (Windows) Unable to create thread to handle NETBIOS session session number on adapter network adapter number.

Explanation

The server cannot start a new client session on the indicated adapter due to an inability to start a separate thread of execution for the indicated session.

System action

Server operation continues, but this session request fails.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down

on the maximum number of sessions that the server can accept with the MAXSESSIONS or the NETBIOSSESSIONS option, or both, in the server options file.

ANR82 34I (AIX) TCP/IP Version 6 administrative driver ready for connection with clients on port port number.

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 34I (Linux) TCP/IP Version 6 administrative driver ready for connection with clients on port port number.

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 34I (Windows) TCP/IP Version 6 administrative driver ready for connection with clients on port port number.

Explanation

The server can now accept sessions with administrative clients using the TCP/IP Version 6 protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 35W (Windows) Requested number of NETBIOS sessions are not available on adapter network adapter number, proceeding with available sessions.

Explanation

The server cannot acquire the requested number of NETBIOS sessions for the indicated adapter. The server attempts to acquire the number of NETBIOS sessions as indicated by the NETBIOSSESSIONS parameter of the server options file or, if this option is not specified, by the MAXSESSIONS option.

System action

Server operation continues, but the maximum number of

NETBIOS sessions is limited to the number of sessions that are acquired.

User response

Ensure that the required number of NETBIOS resources are not already in use. If the LAN Server or LAN Requester application is running, you have NETBIOS configured. In that case, starting the server prior to starting LAN Server or LAN Requester may allow the server to obtain the requested NETBIOS resources.

ANR82 36W (Windows) Failure while listening for NETBIOS sessions on adapter network adapter number, NETBIOS listen return code=listen return code.

Explanation

The server cannot listen for NETBIOS sessions on the indicated adapter. The indicated listen return code was received from the NETBIOS listen API. If the return code is 24, (hex 18), the listen is retried.

System action

Server operation continues. If the return code is 24 (hex 18), a new listen is setup because return code 24 indicates a temporary failure. Otherwise, no additional NETBIOS sessions will start using the indicated adapter until the problem is

corrected and the server is restarted.

User response

A NETBIOS listen failure is an indication of a network problem, an adapter problem, or a NETBIOS configuration problem. The following system configuration and system environment listen return codes (in hex) and resolution actions for a listen failure are found in the *IBM Local Area Network Technical Reference*:

Return Code	Description
11	The local session table is full. The maximum number of sessions are in use. Change NETBIOS configuration to increase the maximum number of sessions.
19	Name conflict. Ensure that the Server NETBIOS name is not in use elsewhere on the network.
22	There are too many commands pending. The maximum number of sessions are in use. Change NETBIOS configuration to increase the maximum number of sessions.

Return Code	Description
35	The operating system resources are exhausted. A reboot is probably required.

ANR82 37E (Windows) Unable to acquire local port information. getaddrinfo return code return code.

Explanation

The server or storage agent used the system getaddrinfo API to determine which TCP/IP protocols could be used. A failure occurred, as indicated by the system error code that is shown. The server was initialize TCP/IP communications.

System action

TCP/IP communications is inoperative.

User response

System information concerning return codes from the getaddrinfo system API should be consulted. Ensure that TCP/IP networking for either TCP/IP version 4 or version 6 is operating correctly.

ANR82 38E (Windows) Session identifier aborted due to an Aspera FASP read error; error error code : error code2 .

Explanation

During the specified session between the server and its partner system, a communication error occurred while receiving data.

System action

The session with the remote system ended.

User response

Ensure that the specified remote system is operational and is properly configured to run IBM Aspera Fast Adaptive Secure Protocol (FASP) data transfer. For information about system configuration, go to IBM Knowledge Center and search for "Optimizing data transfer by enabling Aspera FASP technology."

ANR82 39E (Windows) Session identifier aborted due to an Aspera write error; error error code : error code2 .

Explanation

A communication error occurred during an attempt to transfer data between the server and its partner system.

System action

The session with the remote system ended.

User response

Ensure that the remote system is operational and is properly configured to run IBM Aspera Fast Adaptive Secure Protocol

(FASP) data transfer. For information about system configuration, go to IBM Knowledge Center and search for "Optimizing data transfer by enabling Aspera FASP technology."

ANR82 Named Pipes 60I driver ready for (Windows) connection with clients.

Explanation

The server is now able to accept sessions with clients using the Named Pipes protocol.

System action

Server operation continues.

User response

None.

ANR82 Named Pipes 61W connection (Windows) terminated - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues. Named Pipes communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and

then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 Named Pipes 62W driver is (Windows) terminating due to error in creating a new thread.

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but Named Pipes communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 Error sending 63W data on Named (Windows) Pipes, session session number. WriteFile Return code is return code.

Explanation

The server experiences an error return code from the WriteFile Windows NT API while writing data to Named Pipes over the indicated session. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 Error reading 64W data on Named (Windows) Pipes, session session number. ReadFile return code is return code.

Explanation

The server experiences an error return code from the ReadFile Windows API while reading data from Named Pipes in the indicated session. This may be a normal event if either side of the connection is ended abruptly.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 Error open 65W Named Pipes (Windows) Named Pipes name, CreateNamedPipe return code return code.

Explanation

The server experiences an error return code when trying to open the indicated Named Pipes name for Named Pipes communication with a client. The return code shown is returned by the Windows CreateNamedPipe API.

System action

The session is ended. Server operation continues. Named Pipes communications is inoperative.

User response

The server may have run out of file handles. Stop and restart the server to reenable Named Pipes communications. It is not normal to run out of file handles. A system or logic error may be the underlying cause.

ANR82 Error accepting 66W connection on (Windows) Named Pipes Named Pipes

*name,
ConnectNamed
Pipe return code
return code.*

Explanation

The server experiences an error return code when trying to complete a connection on the indicated Named Pipes name for Named Pipes communication with a client. The return code shown is returned by the Windows ConnectNamedPipe API.

System action

The session is ended. Server operation continues. Named Pipes communications is inoperative.

User response

A system problem may be preventing use of Named Pipes. Stop and restart the server to reenale Named Pipes communications.

**ANR82 Error initializing
67W a security
(Windo descriptor for
ws) Named Pipes
Named Pipes
name, reason:
System
message.**

Explanation

The server experiences an error return code when trying to initialize the indicated Named Pipe for Named Pipes communication with a client. The reason shown is returned by the Windows FormatMessage API.

System action

The session is ended. Server operation continues. Named Pipes communications is inoperative.

User response

Administrator Privileges are required. Login using an account wit h Administrator privileges and restart the server to reenale Named Pipes communications.

**ANR82 Named Pipe
68W communications
(Windo were not
ws) enabled due to
an error looking
up the following
Windows group
name: Windows
group name. Use
the Windows
User manager to
add the
specified group.
Members of the
group will then
use Windows
unified logon to
access the
server over
Named pipes.**

Explanation

The server experiences an error return code when trying to initialize the indicated Named Pipe for Named Pipes communication with a client. The system could not find the Windows Account name specified in the server options file.

System action

The session is ended. Server operation continues. Named Pipes

communications is inoperative.

User response

To use Windows unified logon specify the name of a valid Windows account or group name. Restart the server to reenale Named Pipes communications.

**ANR82 Error opening
69W Named Pipe
(Windo Named Pipes
ws) name, reason:
System
message.**

Explanation

The server experiences an error return code when trying to open the indicated Named Pipe name for Named Pipes communication with a client. The reason shown is returned by the Windows FormatMessage API.

System action

The session is ended. Server operation continues. Named Pipes communications is inoperative.

User response

Consider the reason text and take appropriate action. Stop and restart the server to reenale Named Pipes communications.

**ANR82 Shared memory
73I driver ready for
(Windo connection with
ws) clients on port
port number.**

Explanation

The server is now able to accept sessions with clients using the shared memory protocol on the indicated port.

System action

Server operation continues.

User response

None.

**ANR82 Shared memory
74W communications
(Windo driver is
ws) terminating due
to error in
creating a new
thread.**

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but shared memory communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory.

**ANR82 Shared memory
75W connection
terminated -**

(Windows) insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues. Shared memory communications are inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 Shared memory 76W connection terminated - (Windows) unable to initialize. Key channel key, Reason: reason code.

Explanation

The server cannot accept a client session due being unable to initialize shared memory.

System action

Server operation continues. Shared memory communications are inoperative.

User response

Try a different shared memory session.

ANR82 Shared memory 77E unable to (Windows) initialize - Port: shm port number, Reason: reason code.

Explanation

The server cannot accept a client session because it could not initialize a communication channel. Make sure no other server or storage agent running on the same machine is using the same shm port number.

System action

Server operation continues. Shared memory communications are inoperative.

User response

Try a different shared memory session.

ANR82 SNMP driver 82I ready for (Linux) connection with subagent on port port number.

Explanation

The server can now accept sessions with SNMP subagents on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 SNMP driver 83W unable to (Linux) initialize due to error in BINDing to Port port, reason code reason code.

Explanation

While initializing TCP/IP communications, the server has failed to connect to a master TCP/IP socket on which to listen to SNMP subagents. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from SNMP subagents to run macro commands.

User response

Ensure that no other application is using the port number specified in the server options file with the PORT option. If TCP/IP is also in use for client sessions, ensure that the same port number is not specified for TCP/IP and SNMP communications.

ANR82 The Shared 84E Memory Communication s Protocol could (AIX) not initialize.

Explanation

The server was unable to initialize the Shared Memory Communications Protocol due to an error.

System action

Server operation continues without Shared Memory Communications.

User response

Examine previous error messages for the cause of the failure.

ANR82 The Shared 84E Memory (Linux) Communication s Protocol could not initialize.

Explanation

The server was unable to initialize the Shared Memory Communications Protocol due to an error.

System action

Server operation continues without Shared Memory Communications.

User response

Examine previous error messages for the cause of the failure.

ANR82 Shared Memory 85I driver ready for (AIX) connection with clients on port port

Explanation

The server is now able to accept sessions with clients using the Shared Memory protocol.

System action

Server operation continues.

User response

None.

ANR82 85I (Linux) Shared Memory driver ready for connection with clients on port port

Explanation

The server is now able to accept sessions with clients using the Shared Memory protocol.

System action

Server operation continues.

User response

None.

ANR82 85I (Windows) SNMP driver ready for connection with subagent on port port number.

Explanation

The server can now accept sessions with SNMP subagents on the indicated port number.

System action

Server operation continues.

User response

None.

ANR82 86W (AIX) Unable to initialize Shared Memory driver - insufficient memory.

Explanation

Because the operating system rejected a memory allocation request, the server cannot start communications through the Shared Memory protocol.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

Ensure that there is sufficient paging space for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. It may be necessary to cut down on the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR82 86W (Linux) Unable to initialize Shared Memory driver - insufficient memory.

Explanation

Because the operating system rejected a memory allocation request, the server cannot start communications through the Shared Memory protocol.

System action

Server operation continues, but the server cannot accept sessions

from clients using the Shared Memory protocol.

User response

Ensure that there is sufficient swap space for Solaris. It may be necessary to cut down on the maximum number of client sessions by changing the MAXSESSIONS option in the server options file.

ANR82 86W (Windows) SNMP driver unable to initialize due to error in BINDing to Port port, reason code reason code.

Explanation

While initializing TCP/IP communications, the server has failed to connect to a master TCP/IP socket on which to listen to SNMP subagents. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from SNMP subagents to run macro commands.

User response

Ensure that no other application is using the port number specified in the server options file with the PORT option. If TCP/IP is also in use for client sessions, ensure that the same port number is not specified for TCP/IP communications and SNMP communications. This may be done by

issuing the TCP/IP netstat -s command. If the server is brought down and then started immediately, you may be within the TCP/IP one minute timeout period for port reuse. Bring down the sever, wait one minute, and then restart the server. If that does not work, it may be necessary to restart Windows.

ANR82 87W (AIX) Unable to initialize Shared Memory driver - error creating acceptor socket. Reason code reason code.

Explanation

Because TCP/IP rejected a request for a socket on which to listen, the server cannot start communications through Shared Memory.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

If TCP/IP is not started, use the HALT command from any server prompt to stop the server, and restart it.

ANR82 87W (Linux) Unable to initialize Shared Memory driver - error creating acceptor socket. Reason code reason code.

Explanation

Because TCP/IP rejected a request for a socket

on which to listen, the server cannot start communications through Shared Memory.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

If TCP/IP is not started, use the HALT command from any prompt to stop the server, and restart it.

ANR82 88W (AIX) Unable to establish Shared Memory connection - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues, but the session request for this session fails.

User response

Ensure that there is sufficient paging space for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 88W (Linux) Unable to establish Shared Memory connection - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues, but the session request for this session fails.

User response

Ensure that there is sufficient swap space for Solaris. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 89W (AIX) Shared Memory driver is terminating due to error in creating a new thread.

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but Shared Memory communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure

that there is sufficient paging space for AIX. You may also use SMIT to determine if the number of applications is causing a memory shortage. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 89W (Linux) Shared Memory driver is terminating due to error in creating a new thread.

Explanation

The server cannot initialize due to the inability to create a new thread of execution.

System action

Server operation continues, but Shared Memory communications is inoperative.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient swap space for Solaris. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 90W (AIX) Error sending data through Shared Memory. Reason return code.

Explanation

The server experienced an error return code while

sending data through shared memory. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 90W (Linux) Error sending data through Shared Memory. Reason return code.

Explanation

The server experienced an error return code while sending data through shared memory. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 90I (Windows) IPX/SPX driver ready for connection with clients on socket IPX socket number.

Explanation

The server is now able to accept sessions with clients using the IPX/SPX protocol on the indicated socket number.

System action

Server operation continues.

User response

None.

ANR82 91W (AIX) Error receiving data through Shared Memory. Reason return code.

Explanation

The server experienced an error return code while receiving data through the Shared Memory protocol. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 91W (Linux) Error receiving data through Shared Memory. Reason return code.

Explanation

The server experienced an error return code while receiving data through

the Shared Memory protocol. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 91W (Windows) Unable to bind to IPX/SPX master socket. Return code = return code.

Explanation

The server cannot initiate communications on the socket number designated for its use.

System action

Server operation continues, but communications using the IPX/SPX protocol is inoperative.

User response

Ensure that SPX has been configured to run on this system through the requester configuration program. Ensure that there is no other instance of the server running on the same system that is using the same socket number. This is likely to be the case if the return code is zero. Also ensure that the number of SPX sessions (as specified in your NET.CFG file) has not

been exceeded through other applications using the IPX/SPX protocol.

ANR82 92W (AIX) Session terminated when no data was read through Shared Memory.

Explanation

The server is unable to read data from Shared Memory. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 92W (Linux) Session terminated when no data was read through Shared Memory.

Explanation

The server is unable to read data from Shared Memory. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required.

ANR82 92W (Windows) IPX/SPX connection terminated - insufficient memory.

Explanation

The server cannot accept a client session due to a memory allocation request failure.

System action

Server operation continues.

User response

The most likely cause is a lack of memory. Ensure that there is sufficient space for the Windows paging file. Click on the system icon in the Windows NT control panel and then click on the virtual memory button. Refer to the online help for instructions on how to increase the amount of virtual memory. You may also wish to cut down on the maximum number of sessions that the server can accept with the MAXSESSIONS option in the server options file.

ANR82 93W (AIX) Shared Memory driver unable to initialize due to socket initialization error.

Explanation

While initializing Shared Memory communications, the server failed to set up an interface with TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP has been started and is active on your system. You may issue the TCP/IP ping command to your own address to verify that TCP/IP is both started and active.

ANR82 Shared Memory 93W driver unable to (Linux) initialize due to socket initialization error.

Explanation

While initializing Shared Memory communications, the server failed to set up an interface with TCP/IP.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP has been started and is active on your system. You may issue the TCP/IP ping command to your own address to verify that TCP/IP is both started and active.

ANR82 IPX/SPX driver 93W unable to (Windows) initialize due to error in LISTENing on the master socket, return code = return code.

Explanation

While attempting to listen for session requests from clients using IPX/SPX, the server encountered an error.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the IPX/SPX protocol.

User response

Ensure that IPX/SPX is still running properly and that it has not been intentionally or unintentionally stopped. This may be done by using the getipxadm command to determine if an endpoint can still be opened and bound; also determine if you can still connect to a NetWare server.

ANR82 Shared Memory 94W session unable (AIX) to initialize.

Explanation

While initializing a Shared Memory communications session, an error occurred during initial setup.

System action

Server operation continues, but the session is terminated.

User response

Contact your service representative for assistance in resolving the error.

ANR82 Shared Memory 94W session unable (Linux) to initialize.

Explanation

While initializing a Shared Memory communications session, an error occurred during initial setup.

System action

Server operation continues, but the session is terminated.

User response

Contact your service representative for assistance in resolving the error.

ANR82 Unable to 94W establish (Windows) IPX/SPX connection - accept error. Return code = tli error.

Explanation

The server cannot accept a client session due to a failure in accepting the connection from IPX/SPX.

System action

Server operation continues, but this session request fails.

User response

Ensure that SPX has been configured to run on this system through the requester configuration program. Ensure that there is no other instance of the server running on the same system that is using the same socket number. Also ensure that the number of SPX sessions has not been exceeded through other applications using the IPX/SPX protocol, such as NetWare applications.

ANR82 Shared Memory 95W driver unable to (AIX) initialize due to error in BINDing to Port port, reason code reason code.

Explanation

While initializing Shared Memory communications, the server failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

Ensure that no application is using the port number specified in the server options file with the SHMPORT option by issuing the TCP/IP netstat command. If the server was brought down and client sessions were active, it may be

necessary to terminate the client sessions on the client systems before the port can be freed.

ANR82 95W (Linux) Shared Memory driver unable to initialize due to error in BINDing to Port port, reason code reason code.

Explanation

While initializing Shared Memory communications, the server failed to connect to a master socket on which to listen for clients. The reason code is the return code from the TCP/IP bind API.

System action

Server operation continues, but the server cannot accept sessions from clients using the Shared Memory protocol.

User response

Ensure that no application is using the port number specified in the server options file with the SHMPORT option by issuing the TCP/IP netstat command. If the server was brought down and client sessions were active, it may be necessary to terminate the client sessions on the client systems before the port can be freed.

ANR82 95W (Windows) Error sending data on session session number. Reason return code.

Explanation

The server experiences an error return code from

IPX/SPX while sending data on the indicated session. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no response is required. Otherwise, ensure that IPX/SPX is still active.

ANR82 96W (AIX) Shared Memory driver unable to initialize due to error in LISTENing on the specified Port, reason code reason code.

Explanation

While attempting to listen for session requests from clients using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP listen API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP is running properly by issuing the TCP/IP netstat -s and ping commands

to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 96W (Linux) Shared Memory driver unable to initialize due to error in LISTENing on the specified Port, reason code reason code.

Explanation

While attempting to listen for session requests from clients using TCP/IP, TCP/IP returns an error. The reason code is the return code from the TCP/IP listen API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP is running properly by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 97W (AIX) Shared Memory driver is terminating due to error in accepting a new session, reason code reason code.

Explanation

While attempting to accept a session request from a client using the Shared Memory protocol, TCP/IP returns an error. The reason code is the return code from the TCP/IP accept API.

System action

Server operation continues, but the server cannot accept additional sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP is running properly. This may be done by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 97W (Linux) Shared Memory driver is terminating due to error in accepting a new session, reason code reason code.

Explanation

While attempting to accept a session request from a client using the Shared Memory protocol, TCP/IP returns an error. The reason code is the return code from the TCP/IP accept API.

System action

Server operation continues, but the server

cannot accept additional sessions from clients using the Shared Memory protocol.

User response

Ensure that TCP/IP is running properly. This may be done by issuing the TCP/IP netstat -s and ping commands to other nodes on your network. It may be possible to bring the server down and restart it to allow additional client sessions to start.

ANR82 98W (Linux) The server experienced a TCP/IP error while writing data on socket socket number. Reason return code.

Explanation

An error occurred during negotiation for a shared memory session. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise, ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 98W (Linux) The server experienced a TCP/IP error while writing data on socket socket number. Reason return code.

Explanation

An error occurred during negotiation for a shared memory session. This may be a normal event if either side of the connection is abruptly ended.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise, ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

ANR82 99W (AIX) The server experienced a TCP/IP error while reading data on socket socket number. Reason return code.

Explanation

An error occurred during negotiation for a shared memory session. This may be a normal event if either side of the connection is abruptly ended or if the client is configured incorrectly.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise, ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

Check the client options file to ensure that the server's shared memory port is set up and is not being confused with the server's TCP/IP port. The shared memory port is a TCP/IP port that the server uses to initiate communications, then switches to shared memory communications.

ANR82 99W (Linux) The server experienced a TCP/IP error while reading data on socket socket number. Reason return code.

Explanation

An error occurred during negotiation for a shared memory session. This may be a normal event if either side of the connection is abruptly ended or if the client is configured incorrectly.

System action

The session is ended. Server operation continues.

User response

If the session is ended as a result of intentionally stopping either the client or server, no action is required. Otherwise, ensure that the client and server can communicate using Telnet or FTP applications, which are part of the TCP/IP suite.

Check the client options file to ensure that the server's shared memory port is set up and is not being confused with the server's TCP/IP port. The shared memory port is a TCP/IP port that the server uses to initiate communications, then switches to shared memory communications.

ANR83 00E I/O error on library library name (OP=internal code, CC=internal code, KEY=internal code, ASC=internal code, ASCQ=internal code, SENSE= sense data, Description=err or description). Refer to the IBM Storage Protect documentation on I/O error code descriptions.

Explanation

An I/O error has occurred while operating on the specified library.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the library was identified correctly in the DEFINE PATH command and that the library is currently powered on and ready. If the library has an access door, make sure it is closed. The library reference manual usually contains tables that explain the values of the KEY, ASC, and ASCQ fields.

**ANR83 I/O error on
01E library library
name
(OP=internal
code,
SENSE=internal
code).**

Explanation

An I/O error has occurred while operating on the specified library.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the library was identified correctly in the DEFINE PATH command and that the library is currently powered on and ready. If the library has an access door, make sure it is closed.

**ANR83 I/O error on
02E drive drive name
with volume
volume name
(OP=internal
code, Error
Number=internal
code,
CC=internal
code, rc = return**

**code, KEY=
internal code,
ASC=internal
code, ASCQ=
internal code,
SENSE=sense
data,
Description=err
or description).**
**Refer to the IBM
Storage Protect
documentation
on I/O error
code
descriptions.**

Explanation

An I/O error has occurred while operating on the specified drive.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the drive was identified correctly in the DEFINE PATH command and that the drive is currently powered on and ready. The drive reference manual usually contains tables that explain the values of the KEY, ASC, and ASCQ fields. If the OP=SETMODE SCSI command fails and the KEY, ASC, and ASCQ fields all display a value of FF, the tape device driver that the IBM Storage Protect server uses does not issue this command to the tape drive. Ensure that a correct version of a tape device driver is installed on your system.

**ANR83 I/O error on
03E drive drive name
(OP=internal
code,**

**SENSE=internal
code).**

Explanation

An I/O error has occurred while operating on the specified drive.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the drive was identified correctly in the DEFINE PATH command and that the drive is currently powered on and ready.

**ANR83 Time out error
04E on drive drive
name in library
library name.**

Explanation

A time out condition occurred while waiting for the given drive to become ready so that automated library operations could be performed.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the drive was identified correctly in the DEFINE PATH command, and that the device is currently powered on and ready.

**ANR83 Library library
05E name is not
ready or not
operational.**

Explanation

The specified automated library device is either not ready or not in an operational state.

System action

Initialization of the library device fails.

User response

Ensure that the library is powered on and ready for automated operations. Further initialization attempts for the given library will usually be postponed until the next attempt is made to access the library for an automated operation. During server startup, however, initialization may be retried after a short waiting period.

**ANR83 Request number:
06I Insert device
type volume
volume name
mount mode into
the slot with
element number
slot element of
library library
name within
time limit
minutes; issue
'REPLY' along
with the request
ID when ready.**

Explanation

A CHECKIN LIBVOLUME or a LABEL LIBVOLUME command is in progress, and the specified volume is needed. The server expects the volume to be inserted into the slot with the specified element number of the given library within the time limit specified in the

message. For the slot and element number diagram of your library, refer to the documentation provided with the current ptf level.

System action

The server waits until a REPLY command is issued, or until the time limit expires.

User response

Insert the volume into the slot and issue a REPLY command, along with the request ID, to tell the server that the volume has been inserted.

ANR83 Request number: 07I Remove device type volume volume name from slot with element number slot name of library library name; issue 'REPLY' along with the request ID when ready.

Explanation

A CHECKOUT LIBVOLUME command has completed. You can remove the volume from the slot with the specified element number and store it outside the library. For the slot and element number diagram of your library, refer to the documentation provided with the current ptf level.

System action

The server waits until a REPLY command is issued.

User response

Remove the volume from the slot and store it in a safe place. Issue a REPLY command, along with the request ID, to tell the server that the volume has been removed. The volume can be returned to the library with the CHECKIN LIBVOLUME command.

ANR83 Request number: 08I device type volume volume name is required for use in library library name; CHECKIN LIBVOLUME required within time limit minutes.

Explanation

A mount request has been made for a volume that is defined in a storage pool, but which is currently checked out of the given library.

System action

The server waits until it detects that the volume has been checked into the library, or the time limit expires.

User response

Obtain the required volume, and insert it into the library by issuing a CHECKIN LIBVOLUME command. Use the SWAP=YES option of the CHECKIN LIBVOLUME command if the library is currently full; this process allows the server to select an appropriate volume to be swapped

out in order to make room for the required volume.

ANR83 Mount attempt 09E failed - library library name is not defined.

Explanation

An attempt has been made to mount a volume, but the attempt fails because the specified library is not defined.

System action

The operation fails.

User response

Ensure that the LIBRARY attribute of the device class associated with the mount operation identifies a defined library. If not, correct the value of the LIBRARY attribute, or define the specified library and retry the operation.

ANR83 An I/O error 10E occurred while accessing library library name.

Explanation

An I/O error occurs while accessing the designated library.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the library is identified correctly in the DEFINE PATH command, and that the library is currently powered on and ready. If the library has

an access door, make sure it is closed. After checking and correcting these potential problems, retry the operation.

ANR83 An input/output 11E (I/O) error occurred during an attempt to access drive drive name for operation low-level operation. The error number (errno) is drive errno and the return code (rc) is return code.

Explanation

This error can occur if the DEVICE parameter is incorrectly specified, if the drive is powered off, or if the Windows Group Policy blocks access to removable devices or hardware errors in the drive.

System action

System operation continues, but the specified operation fails.

User response

To resolve the issue, take the following steps: 1. Ensure that the drive is powered on and ready and then retry the operation. 2. If the operation continues to fail, verify whether the DEVICE parameter that is associated with the drive was specified correctly on the DEFINE PATH command. To verify the value of the DEVICE parameter, issue the QUERY PATH command. For example, if the

source is BOSTON1, issue the following command: query path boston1 format=detailed 3. If the DEVICE parameter was incorrectly specified, use the UPDATE PATH command to update the parameter value. 4. If you are using a Microsoft Windows operating system, review the information in this step and take any appropriate action. If the errno value is 3, the Windows Group Policy is running on the host system and the Audit object access policy setting is defined. The Windows Group Policy, especially the Audit object access policy setting, can block access to I/O from the host system. If this issue occurs, running tape devices can no longer be detected by tape device drivers. To use tape devices on a Windows operating system with Windows Group Policy enabled, take one of the following actions: - Ensure that no value is defined for the Audit object access policy setting. Tip: To change the setting, complete the following steps: a. Open the Group Policy Management Console and click the Settings section for the target group policy object to access the Local Group Policy Editor. b. In the navigation pane, click Computer Configuration > Policies > Windows Settings > Security Settings > Local Policies > Audit Policy. - Ensure that the Windows command gpupdate /force is not issued while I/O is

running with the tape devices and that the Audit object access policy setting is not defined. - Ensure that the IBM Storage Protect server is not in the Active Directory group policy. - Disable the Windows Group Policy. For more information about diagnosing and resolving the error, see technote 298703 (<https://www.ibm.com/support/pages/node/298703>). Or go to the Microsoft documentation website and search for "Monitor the use of removable storage devices" (<https://docs.microsoft.com/en-us/windows/security/threat-protection/auditing/monitor-the-use-of-removable-storage-devices>). 5. Retry the operation that failed.

ANR83 Volume volume 12E name could not be located in library library name.

Explanation

The designated volume cannot be found at its expected location in the given library.

System action

The operation fails.

User response

Perform an AUDIT LIBRARY operation on the designated library, which forces the server to reevaluate its inventory information for volumes in the library.

ANR83 Volume volume 13E name is not present in

library library name.

Explanation

A mount request is made for the given volume in the specified library, but the volume is not currently checked into the library.

System action

The mount operation fails. If the volume is being mounted for storage pool I/O (as opposed to import/export I/O), its ACCESS attribute is changed to UNAVAILABLE to prevent further mount requests.

User response

Issue a CHECKIN LIBVOLUME command to return the volume into the library, and update the volumes ACCESS attribute to READONLY or READWRITE using the UPDATE VOLUME command. Retry the mount request.

ANR83 Command 14E processing failed because library library name is full.

Explanation

The command failed because tape volumes occupy all of the storage slots and tape drives in the library. In this situation, attempts by the server to move tape cartridges within the library can fail.

System action

Server operation continues, but the command fails.

User response

To resolve the issue, complete the following steps:

1. Ensure that the total number of tape cartridges is not greater than the total number of storage slots in the library. If the library has too many tape cartridges, the CHECKIN LIBVOLUME, CHECKOUT LIBVOLUME, and LABEL LIBVOLUME commands can fail.
2. If the library does not have entry and exit ports, and all storage slots and tape drives are loaded with tape cartridges, manually remove the tape cartridges from the tape drives. Then, reissue the failed command.
3. If the library has entry and exit ports and all storage slots are full, take one of the following actions:
 1. a. If all tape drives and/or entry and exit ports have tape cartridges, manually remove the tape cartridges from the tape drives and/or the entry and exit ports. Then, run the CHECKOUT LIBVOLUME command to check out the tape volumes and reissue the failed command.

2. b. If all tape drives are full and entry and exit ports are partially full, manually remove the tape cartridges from these tape drives. Then, run the CHECKOUT LIBVOLUME command to check out the tape volumes. Reissue the failed command.
3. c. If the tape drives are empty or partially full and all entry and exit ports are full, manually remove the tape cartridges from the entry and exit ports. Run the CHECKOUT LIBVOLUME command to check out the tape volumes. Reissue the failed command.

ANR83 Command: The device type of drive drive name is not supported in library type libraries.
15E

Explanation

Drives of the type identified in the command are not supported in the given type of library.

System action

The command is not processed.

User response

Determine whether the drive and library combination is supported by the installed level of the server. If so, contact your service representative.

ANR83 Selecting swap volume to be
16E

checked out of library library name.

Explanation

A CHECKIN LIBVOL command was issued for a library that has no empty slots to hold the new cartridge. The SWAP=YES parameter was included in the command.

System action

A CHECKOUT LIBVOL command will be automatically be issued, specifying either a scratch volume or, if there are none, a volume with the lowest number of mounts.

User response

Use a supported type of drive. volume from the library and store it in a safe place. Issue a REPLY command to tell the server that the volume has been removed. The volume can be introduced back into the library with the CHECKIN LIBVOLUME command.

ANR83 The volume in device type drive drive name must be manually ejected.
17I

Explanation

This device type does not automatically eject the volume when it is dismounted and requires that the volume be manually ejected from the drive.

System action

None.

User response

Physically eject the volume from the drive.

ANR83 Request number: 18I Mount side side of device type volume volume name mount mode in drive drive name of library library name within time limit< minutes.

Explanation

The server requires that the specified volume be mounted as requested. Since the volume is two-sided, this message specifies which side (A or B) is needed by the server for I/O operations.

System action

The server waits for the volume to be mounted.

User response

Mount the volume in the specified drive.

ANR83 Request number: 19I Insert device type volume volume name mount mode into library library name within time limit minute(s).

Explanation

A CHECKIN LIBVOLUME command is in progress, and the specified volume is needed. The server expects the volume to be

inserted into the library with the convenience I/O station mechanism.

System action

The server waits until the volume is in the library, or until the time limit expires.

User response

Insert the specified volume into the library. If the volume has already been inserted into the library, no user action is necessary.

ANR83 Request number: 20I Insert device type volume volume name mount mode in drive drive name of library library name within time limit minute(s); issue 'REPLY ' along with the request ID when ready.

Explanation

A CHECKIN LIBVOLUME or a LABEL LIBVOLUME command is in progress, and the specified volume is needed. The server expects the volume to be inserted in the designated drive of the given library within the time limit specified in the message.

System action

The server waits until a REPLY command is issued, or until the time limit expires.

User response

Insert the volume into the drive, and then issue a

REPLY command, along with the request ID, to tell the server that the volume has been inserted.

ANR83 21I *Request number: Remove device type volume volume name from drive drive name of library library name; issue 'REPLY' along with the request ID when ready.*

Explanation

A CHECKOUT LIBVOLUME or a LABEL LIBVOLUME command has completed. You can remove the specified volume from the designated drive and store it outside the library.

System action

The server waits until a REPLY command is issued.

User response

Remove the volume from the drive and store it in a safe place. Issue a REPLY command, along with the request ID, to tell the server that the volume has been removed. The volume can be returned to the library with the CHECKIN LIBVOLUME command.

ANR83 22I *Request number: Remove device type volume volume name from entry/exit port of library library name; issue 'REPLY' along with the*

request ID when ready.

Explanation

A CHECKOUT LIBVOLUME command has completed. You can remove the specified volume from the entry/exit port of the given library and store it elsewhere.

System action

The server waits until a REPLY command is issued.

User response

Remove the volume from the library and store it in a safe place. Issue a REPLY command, along with the request ID, to tell the server that the volume has been removed. The volume can be returned to the library with the CHECKIN LIBVOLUME command.

ANR83 23I *Request number: Insert device type volume volume name mount mode into entry/exit port of library library name within time limit minute(s); issue 'REPLY' along with the request ID when ready.*

Explanation

A CHECKIN LIBVOLUME or a LABEL LIBVOLUME command is in progress, and the specified volume is needed. Mount the volume in the entry/exit port of the given library within the time limit specified in the message.

System action

The server waits until a REPLY command is issued, or until the time limit expires.

User response

Insert the volume into the library's entry/exit port; and issue a REPLY command, along with the request ID, to tell the server that the volume has been inserted.

ANR83 24I *Device type volume volume name is expected to be mounted (mount mode).*

Explanation

The specified volume is expected to be mounted in the near future so the server can access it for reading or writing.

System action

None.

User response

If the volume is stored offline, retrieve it so that it is readily accessible when the server requests that it be mounted.

ANR83 25I *Dismounting volume volume name - mount retention period minute mount retention expired.*

Explanation

The specified volume is dismounted because the given mount retention period has expired.

System action

The volume is dismounted.

User response

None.

ANR83 26I *Request number: Mount device type volume volume name mount mode in drive drive name of library library name within time limit minutes.*

Explanation

If the volume name includes the names EXP, IMP, DUMP, or DBBK, the request is for a scratch volume.

System action

The server waits for the volume to be mounted.

User response

Mount the volume in the specified drive.

ANR83 27E *Command: Cannot cancel request request number.*

Explanation

The request, whose number is specified by the given command, cannot be canceled. The requested operation must be completed.

System action

The cancel request command is not processed.

User response

Proceed with the requested operation.

ANR83 Request number: 28I *device type volume volume name mounted in drive drive name.*

Explanation

The server verifies that a requested volume has been mounted properly in the given drive.

System action

The volume is accessed for reading or writing, or both.

User response

None.

ANR83 Device type 29I *volume volume name is mounted mount mode in drive drive name, status: IDLE.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted in the specified drive. The volume is currently idle, meaning no active operations are being performed. If the volume remains in the idle state for the amount of time specified by the device class mount retention period, it will be automatically dismantled.

System action

None.

User response

None.

ANR83 Device type 30I *volume volume name is mounted mount mode in drive drive name, status: IN USE.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted in the specified drive. The volume is currently in use, meaning that read or write operations, or both, are being performed.

System action

None.

User response

None.

ANR83 Device type 31I *volume volume name is mounted mount mode in drive drive name, status: DISMOUNTING.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted in the specified drive. The volume is currently being dismantled by the server.

System action

None.

User response

None.

ANR83 Device type 32I *volume volume name is mounted mount mode, status: IDLE.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted for I/O operations. The volume is currently idle, meaning no active operations are being performed. If the volume remains in the idle state for the amount of time specified by the device class mount retention period, it will be automatically dismantled.

System action

None.

User response

None.

ANR83 Device type 33I *volume volume name is mounted mount mode, status: IN USE.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted for I/O operations. The volume is currently in use, meaning that read or write operations, or both are being performed.

System action

None.

User response

None.

ANR83 Number of 34I *matches matches found.*

Explanation

This is a summary message for the QUERY MOUNT command. It indicates the total number of mount points that have been reported in the command output.

System action

None.

User response

None.

ANR83 Request number: 35I *Verifying label of device type volume volume name in drive drive name.*

Explanation

The server verifies the label of the volume that has been requested by an earlier mount message. This is done to ensure that the correct volume has been mounted by the operator.

System action

The server reads the volume label and checks it for validity.

User response

None.

ANR83 Verifying label 36I *of device type volume volume name in drive drive name.*

Explanation

The server verifies the label of a volume that is needed for read or write operations, or both. This is done to ensure that the correct volume has been mounted.

System action

The server reads the volume label and checks it for validity.

User response

None.

ANR83 Device type 37I volume volume name mounted in drive drive name.

Explanation

The server verifies that the specified mount request has been completed properly. Read or write operations, or both, can be performed on the volume.

System action

The label of the volume has been verified.

User response

None.

ANR83 Device type 38E volume volume name cannot be overwritten by EXPORT operation.

Explanation

The specified volume already exists or contains data, so that the server cannot allow new export data to be written to it.

System action

The server detects that the given volume already contains some data that would be overwritten by the requested export operation.

User response

If the specified volume does not contain any valuable data, delete it and retry the export operation.

ANR83 Device type 39E volume intended volume name in drive drive name was replaced with volume incorrect volume name.

Explanation

The server detects that a previously mounted and verified volume (the desired volume) has been replaced with a different volume (the incorrect volume). No further read or write operations, or both, can occur on the given drive, because data corruption may occur.

System action

The server dismounts the volume from the drive.

User response

Mount the correct volume again if it is in a manual library and retry the operation.

ANR83 Device type 40I volume volume name mounted.

Explanation

The server has mounted the given volume.

System action

Read or write operations, or both, will commence for the volume.

User response

None.

ANR83 End-of-volume 41I reached for device type volume volume name.

Explanation

The server has detected an end-of-volume condition for the given volume.

System action

The volume is marked full if the transaction is committed. If the transaction is stopped before it is committed, the volume remains in a filling state. If more data must be stored, the server must use another volume to complete the storage.

User response

Insert tape cartridges with available storage to the tape library.

ANR83 Request request 42I number for volume volume name canceled by administrator name.

Explanation

A mount request is canceled by the given administrator.

System action

The system cancels the mount request.

User response

None.

ANR83 Request request 43I number for volume volume name canceled (PERMANENT) by administrator name.

Explanation

A mount request is successfully canceled with the PERMANENT option.

System action

The system cancels the mount request and marks the volume as unavailable.

User response

None.

ANR83 Command: 44E Invalid request number - request number.

Explanation

A command has been entered with an incorrect request number.

System action

The server does not process the command.

User response

Issue the command with the correct request number.

ANR83 45E *Command: No match found for this request number.*

Explanation

The request number specified by the command is not in the list of outstanding mount requests.

System action

The server does not process the command.

User response

Issue the command with the correct request number.

ANR83 46I *Command: No requests are outstanding.*

Explanation

A QUERY REQUEST or CANCEL REQUEST command has been entered although no mount requests are outstanding.

System action

Server operation continues.

User response

None.

ANR83 47E *Command: Volume volume not found.*

Explanation

A DISMOUNT VOLUME command is issued, but the volume to be dismounted cannot be found.

System action

Server operation continues.

User response

Ensure that the correct volume name is entered.

ANR83 48E *Command: Volume volume is not "Idle".*

Explanation

A DISMOUNT VOLUME command has been issued, but the volume is still in use and cannot be dismounted.

System action

Server operation continues.

User response

If it is necessary to dismount the volume, cancel the session or process that is using the volume, and reissue the command.

ANR83 49E *Command: Device device not found.*

Explanation

A DISMOUNT DEVICE command has been issued, but the device to be dismounted cannot be found.

System action

Server operation continues.

User response

Ensure that the correct device has been specified.

ANR83 50E *Command: Device device is not "Idle".*

Explanation

A DISMOUNT DEVICE command has been issued, but the device is still in use and cannot be dismounted.

System action

Server operation continues.

User response

If it is necessary to dismount the device, cancel the session or process that is using the device, and reissue the command.

ANR83 51E *Request number: Mount request for volume volume name has timed out.*

Explanation

The mount request has not been satisfied in the requested time.

System action

The server fails the mount request.

User response

Retry the mount request and ensure that the volume is mounted within

the time limit for the manual library. For an automated library, retry the mount request and increase the mount wait time for the device class.

ANR83 52I *Requests outstanding:*

Explanation

This message provides a list of currently outstanding mount requests.

System action

The server lists all outstanding mount requests or the one specified on the QUERY REQUEST command.

User response

None.

ANR83 53E *Request number: I/O error reading label of volume in drive drive name.*

Explanation

The server detects an error while reading the volume label from the volume in the specified drive.

System action

The volume is ejected, and the server continues to wait for the requested volume to be mounted.

User response

Ensure the following:

- The requested volume is properly inserted in the designated drive.
- The volume has been labeled by using

the DSMLABEL utility program before you attempt to use it with the server.

- The DEVICE parameter associated with the drive is identified correctly in the DEFINE PATH command, and the drive is currently powered on and ready.

After checking and correcting these potential problems, retry the operation.

ANR83 Request number: 54E **The incorrect volume (*volume name*) is mounted in the drive *drive name*.**

Explanation

The user has inserted the volume into the indicated drive, but it is not the one requested by the server or has not inserted the target volume to the first entry/exit port in a SCSI library.

System action

The volume is ejected or dismounted, and the server continues to wait for the requested volume to be mounted or to be inserted to the first entry/exit port in a SCSI library.

User response

Ensure that the requested volume is inserted properly into the designated drive. If the CHECKIN LIBVOLUME command operation is issued to a SCSI library by specifying SEARCH=NO, ensure that the volume must be in the first slot

of an entry/exit port in the library.

ANR83 I/O error 55E **reading label for volume *volume name* in drive *drive name*.**

Explanation

The server detects an error while reading/verifying the volume label for the volume in the specified drive.

System action

The volume is dismounted by the server.

User response

Ensure the following:

- Check the integrity of the data on the volume by issuing an AUDIT VOLUME command. If this error occurs on a volume that is stored inside a VTL or SCSI library, the library itself may need to be audited by using the AUDIT LIBRARY command.
- The DEVICE parameter associated with the drive is identified correctly in the DEFINE PATH command, and the drive is currently powered on and ready.

After checking and correcting these potential problems, retry the operation.

ANR83 Incorrect 56E **volume mounted *volume name* was mounted instead of *volume expected volume name* in library *library name*.**

Explanation

The incorrect volume has been mounted in the designated library. This error can occur if the library inventory has been altered due to manual intervention or movement of volumes, or both.

System action

The volume is dismounted; the expected volume may be marked unavailable if this error occurs during normal volume mount activity.

User response

Use the AUDIT LIBRARY command to force the library to reevaluate its inventory of volumes.

ANR83 Error reading 57I **label of volume from slot-*element* *element address* in drive *drive name* of library *library name*.**

Explanation

While processing a search-mode CHECKIN LIBVOLUME command for the designated library, the server finds a volume whose label cannot be read.

System action

The volume is dismounted and is not checked into the library.

User response

Remove the volume from the library and ensure that it is properly labeled.

After doing so, the volume can be checked into the library.

ANR83 Audit operation 58E **is required for library *library name*.**

Explanation

The server encounters a problem managing the given library, and determines that an AUDIT LIBRARY operation should be performed.

System action

The server may continue to access the library, but some volumes may not be accessible until an AUDIT LIBRARY command is issued against the library.

User response

Issue an AUDIT LIBRARY command against the library.

ANR83 Media fault 59E **detected on device type *device type* volume *volume name* in drive *drive name* of library *library name*.**

Explanation

The server encounters a media fault while accessing the given volume using the specified drive.

System action

The operation that is attempting to access the volume will fail, and the volume will be

immediately dismounted from the drive.

User response

In some cases, the server will automatically mark the volume readonly. This will prevent the server from trying to write to the volume. Issue an AUDIT VOLUME command to determine if any data has been lost due to the media failure.

ANR83 60I *Volume volume name has been deleted from MANUAL library library name.*

Explanation

The specified volume has been deleted by the server. It can be returned to a scratch pool by the mount operator if desired.

System action

The volume is removed from the server's inventory.

User response

None.

ANR83 61E *Command: Device type not specified.*

Explanation

The specified command requires that the DEVTYPE parameter be supplied.

System action

The command is not processed.

User response

Reissue the command, and specify a valid DEVTYPE parameter.

ANR83 62E *Command: The parameter parameter is invalid for device type device type.*

Explanation

The specified parameter is not valid for a device class with the given device type.

System action

The command is not processed.

User response

Reissue the command with a correct parameter.

ANR83 63E *Command: The parameter parameter is required for device type device type.*

Explanation

The specified command requires that the given parameter be supplied when the indicated device type is used.

System action

The command is not processed.

User response

Reissue the command, providing the required parameter value.

ANR83 64E *Command: Cannot reduce MOUNTLIMIT*

below number of volumes currently mounted.

Explanation

The MOUNTLIMIT value cannot be reduced below the number of currently mounted volumes.

System action

The command is not processed.

User response

Wait until the server finishes using some of the mounted volumes, or force the server to dismount idle volumes using the DISMOUNT VOLUME command, then retry this command.

ANR83 65E *Command: The parameter parameter cannot be changed.*

Explanation

The specified parameter cannot be changed from the value that was provided with the associated DEFINE command.

System action

The command is not processed.

User response

If it is necessary to use a different value for the given parameter, the associated object must be deleted and then redefined using the new parameter value.

ANR83 66E *Command: Invalid value for parameter parameter.*

Explanation

An invalid value has been provided for the specified parameter.

System action

The command is not processed.

User response

Reissue the command, and specify a valid parameter value. If this is for the ELEMENT parameter on DEFINE DRIVE with AUTODETECT, this message can be issued because the library doesn't support the ability to determine the element number dynamically. In this case, supply the actual element number instead of using AUTODETECT for the ELEMENT parameter. If this is for the SCALECAPACITY parameter on a 3592 device class, verify that this device class has the attribute WORM=NO as WORM and SCALECAPACITY are not compatible.

ANR83 67E *Command: Multiple parameter values are not allowed.*

Explanation

The designated parameter is specified more than once in the command; this is not allowed.

System action

The command is not processed.

User response

Reissue the command, but specify the given parameter only once.

ANR83 Request number: 68E *Incorrect side (side) of volume volume name mounted in drive drive name.*

Explanation

The user inserted the wrong side of the requested volume into the indicated drive.

System action

The volume is ejected, and the server continues to wait for the requested side of the volume to be mounted.

User response

Insert the correct side of the requested volume into the designated drive.

ANR83 Library library 69E *name is not defined.*

Explanation

The designated library is not defined, but has been referenced in a mount request.

System action

The mount request is rejected.

User response

Define the given library, or update the LIBRARY parameter of the device class that references it.

ANR83 Device type 70I *volume volume name is mounted mount mode, status: RETRY.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted for I/O operations. The volume is currently in RETRY, meaning an attempt is being made to re-establish communications with another server. If the volume remains in the retry state for the amount of time specified by the device class retry period, the operation will fail and the volume will be automatically dismounted.

System action

None.

User response

None.

ANR83 I/O is being 71I *bypassed for volume volume name.*

Explanation

The indicated volume is mounted but the server is bypassing actual I/O operations for the volume. The pool associated with the volume matches the NULLPOOLNAME option

in the options file or NULLFILEDEVCLASS YES has been specified in the options file.

System action

None.

User response

None.

ANR83 Request number: 72I *Remove device type volume volume name from drive drive name of library library name.*

Explanation

A LABEL LIBVOLUME command has completed. You can remove the specified volume from the designated drive and store it outside the library.

System action

None.

User response

Remove the volume from the drive and store it in a safe place.

ANR83 Request number: 73I *Fill the bulk entry/exit port of library library name with all device type volumes to be processed within time limit minute(s); issue 'REPLY' along with the request ID when ready.*

Explanation

A CHECKIN LIBVOLUME or LABEL LIBVOL

command with SEARCH=BULK is in progress. Load all volumes to be processed into the multi-slot entry/exit port of the given library within the time limit specified in the message.

System action

The server waits until a REPLY command is issued, or until the time limit expires.

User response

Insert the volumes into the library's entry/exit port; and issue a REPLY command, along with the request ID, to tell the server that the volumes have been inserted.

ANR83 Unable to 74E *unmount mountpoint mountpoint name.*

Explanation

A removable file device class mountpoint had to be unmounted using the operating system unmount function. The server did not have permission to unmount the directory specified.

System action

The server continues, but cannot use the mountpoint for removable file support until the directory is unmounted.

User response

It may be necessary to run the server as a root user to

mounted directories to be unmounted.

ANR83 Device type 75E *volume volume name cannot be overwritten by BACKUPSET operation.*

Explanation

The specified volume already exists or contains data, so that the server cannot allow new backup set data to be written to it.

System action

The server detects that the given volume already contains some data that would be overwritten by the requested backup set operation.

User response

If the specified volume does not contain any valuable data, delete it and retry the backup set operation.

ANR83 Mount point 76I *reserved in device class Device class name, status: RESERVED.*

Explanation

In response to a QUERY MOUNT command, the server indicates that there is a mount point reserved for future I/O operations in the given device class.

System action

None.

User response

None.

ANR83 Device type 77I *volume volume name is mounted mount mode, status: DISMOUNTING.*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is currently being dismounted.

System action

None.

User response

None.

ANR83 Device type 78I *volume volume name is mounted mount mode, status: RETRY DISMOUNT FAILURE.*

Explanation

In response to a QUERY MOUNT command, the server indicates that it is currently retrying the dismount of the given volume because of a failure during the previous dismount.

System action

None.

User response

None.

ANR83 Mount point in 79I *device class Device class name is waiting*

for the volume mount to complete, status: WAITING FOR VOLUME.

Explanation

In response to a QUERY MOUNT command, the server indicates that there is a mount point in the given device class waiting for the volume mount to complete.

System action

None.

User response

None.

ANR83 Device type 80I *volume volume name is mounted mount mode in drive drive name, status: RETRY DISMOUNT FAILURE.*

Explanation

Because of the failure of a previous dismount, the server is retrying the dismount of the specified volume from the specified drive. In response to a QUERY MOUNT command, the server indicates that the volume is mounted in the drive.

System action

None.

User response

None.

ANR83 Device type 81E *volume volume*

name could not be mounted in drive drive name.

Explanation

The server could not complete the specified mount request due to an error. Examine previous messages for additional information regarding the specified volume and the operation.

System action

The requested operation fails.

User response

Examine previous messages for additional information regarding the specified volume and the operation.

ANR83 Library library 82W *name is now full.*

Explanation

During a library check-in operation from a multi-slot entry/exit station, the last storage location was filled before checking the remainder of the entry/exit slots.

System action

The operation stops, but is considered successful if at least one volume is checked in.

User response

If more volumes remain to be checked in, issue a CHECKOUT LIBVOLUME command to make room in the library. Retry the library operation.

ANR83 83E Device class device class name directory directory name is not a SnapLock directory.

Explanation

When processing the named device class, it was discovered that a directory was specified for the device class that is not a NetApp SnapLock WORM Volume. All directories used by a device class for a storage pool with RECLAMATIONTYPE=SNA PLOCK must be Snaplock directories.

System action

If you are trying to define a storage pool with RECLAMATIONTYPE=SNA PLOCK, the command fails. If you are trying to update a device class that is pointed to by a RECLAMATIONTYPE=SNA PLOCK storage pool, the command fails.

User response

If you are trying to define a storage pool with RECLAMATIONTYPE=SNA PLOCK, you need to specify a device class which has all directories which are NetApp SnapLock WORM Volumes. You may select another device class which has all SnapLock directories specified in it. Or you may use the UPDATE DEVCLASS command to remove non-SnapLock directories from the device class DIR list. If you modify an existing device class, you

need to ensure that no data is stored in directories that are to be removed from the device class. If this message is issued when you are trying to update a device class, ensure that all directories specified in the directory are SnapLock directories.

ANR83 84E Request number: Incorrect volume (volume name) inserted into library library name.

Explanation

The user has inserted the named volume into the indicated library, but it is not the one requested by the server.

System action

The volume is skipped, and the server continues to wait for the requested volume to be inserted.

User response

Ensure that the requested volume is inserted properly into the designated location in the library.

ANR83 85E All entry/exit ports of library library name are empty.

Explanation

The entry/exit ports of the library do not contain a volume that can be processed.

System action

The command fails.

User response

Ensure that the volume is inserted properly into the entry/exit port of the library and that the library indicates the volume is inserted and issue the command again. Contact the hardware vendor if the volume is inserted correctly and this error occurs.

ANR83 86W Slot element number of library library name is inaccessible.

Explanation

The slot in the library could not be physically accessed at this time.

System action

The slot is skipped and processing continues with the next slot.

User response

If there is a volume in the slot that needs to be processed, verify that the Entry/Exit door is closed, the slot is accessible, and the device has not logged any device errors before trying the command again. Contact the hardware vendor if slots are incorrectly being reported as inaccessible.

ANR83 87I Request number: All entry/exit ports of library library name are full or inaccessible. Empty the entry/exit ports, close the entry/exit port door, and make the

ports accessible.

Explanation

A CHECKOUT LIBVOLUME command cannot find an empty and available entry/exit port to place the volume to be removed.

System action

The server waits until the operator performs the actions requested.

User response

Make at least one entry/exit port empty and accessible. Check the entry/exit ports or the library. Make sure the entry/exit door is closed. If all the entry/exit ports are full remove at least one volume from the entry/exit port. If any of entry/exit are empty then the empty entry/exit ports are inaccessible. Check the library's documentation on how to make the entry/exit port accessible. If the library is incorrectly reporting the status of the entry/exit port contact the library vendor.

ANR83 88E Device class device class name has no directories specified.

Explanation

When processing the named device class, which is referenced by a storage pool of type RECLAMATIONTYPE=SNA PLOCK, it was discovered that there were no directories specified for it.

One or more directories must be specified for a device class that is used by a storage pool with RECLAMATIONTYPE=SNA PLOCK, and all directories must be NetApp SnapLock WORM Volumes.

System action

The operation fails.

User response

A device class that is referenced by a storage pool of type RECLAMATIONTYPE=SNA PLOCK needs to specify one or more directories which are NetApp SnapLock WORM Volumes. Use the UPDATE DEVCLASS command to define appropriate directories to the device class and retry your request.

ANR83 89E Device class device class name has storage pools using it with inconsistent RECLAMATIONTYPE parameters, or invalid directories specified in it.

Explanation

When processing the named device class, it was discovered that it was not configured properly. A device class can be referenced by storage pools of type RECLAMATIONTYPE=THRESHOLD or RECLAMATIONTYPE=SNA PLOCK. For storage pools of type

RECLAMATIONTYPE=SNA PLOCK, all directories specified in the device class must be on NetApp SnapLock WORM Volumes.

System action

If the IBM Storage Protect server is starting, the server continues; however, attempts made to read from or write to that storage pool will fail until the storage pools referencing the device class and the device class are properly configured.

User response

Check the activity log for ANR8502, ANR8383E, and ANR8388E messages. If these messages have been issued, follow the instructions in the User Response section of those messages to resolve the issues.

If the problem is not resolved, use the QUERY DEVCLASS command with the FORMAT=DETAILED option to obtain the specified directories for the device class. Verify that each directory is available to the IBM Storage Protect server, e.g., on-line, in read-write mode, configured properly, etc.

If the problem is not resolved, for a device class used by RECLAMATIONTYPE=SNA PLOCK storage pools, check that each directory is a NetApp SnapLock WORM Volume. If not, use the UPDATE DEVCLASS command to update the device class

directory structure appropriately.

If the problem is not resolved, use the QUERY STGPOOL command with the FORMAT=DETAILED option to determine which storage pools are pointing to the device class. Verify that storage pools of either type RECLAMATIONTYPE=THRESHOLD or RECLAMATIONTYPE=SNA PLOCK are using the device class. If storage pools of both types are using the device class, modify the storage pool definitions such that only one type of storage pool uses the device class. If you wish to have storage pools of both reclamation types pointing to the same directory structure, you may create two device classes with the same directory structure, and have storage pools of one reclamation type use one device class while storage pools of the other reclamation type uses the other device class.

If you have made updates to the storage pools and device classes and the problem is not resolved, you may need to restart the IBM Storage Protect server.

ANR83 90W Failure connecting to library client library client to manage volume volume.

Explanation

The library manager failed to contact the designated library client for a management

operation for the specified volume.

System action

The library management operation fails.

User response

Review the other messages in the activity log relating to this library client and this volume to determine which operations were affected by this failure.

ANR83 91E The external library manager file name can not be found. The library library name is not available.

Explanation

The external library manager listed for this library was not found. The path or the file name is not correct.

System action

The library management operation fails.

User response

Verify the path and the name of the external library mentioned. If it is correct, verify that the file is present on the system and that file permissions allow the server to invoke the file.

ANR83 92E The external library manager file name does not have executable permission. The library library name is not available.

Explanation

The external library manager listed for this library was not found. The path or the file name is not correct.

System action

The library management operation fails.

User response

Verify the path and the name of the external library mentioned. If it is correct, verify that the file is present on the system and that the file permissions allow the server to invoke the file.

ANR83 93E Failed to communicate with the external library *library name* through it's defined external library manager path.

Explanation

The external library manager executable file did not start or exited immediately.

System action

The library management operation fails.

User response

Verify the path and the file name of this library's external library manager. If it is correct, verify that the file is present on the system and that the file permissions allow the server to invoke the file. The path and file name

can be found by using the QUERY PATH command.

ANR83 94E The device class,device class name,directory parameter is too long.

Explanation

The directory parameter for the define device class command is too long.

System action

The command is not processed.

User response

Reissue the command, specifying a valid DIRECTORY parameter. The directory parameter must be between 0 and 1400 characters.

ANR83 95E Command: The parameters specified are only valid for a device class defined with a ZosMedia library.

Explanation

The specified parameter is not valid for a device class unless a ZosMedia library is specified in the Library parameter of the device class.

System action

The command is not processed.

User response

Reissue the command with a correct parameter.

ANR83 96E Command: Library *library name* cannot discover the drives that it owns.

Explanation

The PERFORM LIBACTION command failed for one of the following reasons: - The library lacks the SCSI capability to determine the serial and element numbers of its drives. - The storage area network (SAN) discovery function failed to find a tape drive with the specified serial number. - One or more drives in this library do not appear on the host system.

System action

The command is not processed.

User response

To resolve the issue, complete the following steps:

1. Ensure that the host bus adapter application programming interface (HBA API) is installed on the host system and that the SAN discovery function is working correctly.
2. Ensure that each drive in the library appears on the host system.
3. If the library was created by a library partition operation, ensure that the number of library drives that appear on the host system matches the number

of drives in the library inventory.

4. Ensure that each drive has its own serial number. If not, check the activity log to find a warning message related to the tape drive and resolve the issue.
5. Retry the PERFORM LIBACTION command. If the command still fails, manually specify drive and drive path definitions for this library, one drive at a time.

ANR83 97E Library name (*library name*) is too long to use as the default PREFIX value. An explicit PREFIX value is required.

Explanation

The PREFIX value must be specified with 25 characters or less. If a PREFIX value is not specified, the library name is used by default. However, if the library name is longer than 25 characters, it cannot be used for the PREFIX parameter. Instead, the PREFIX value must be specified explicitly.

System action

The command is not processed.

User response

Reissue the PERFORM LIBACTION command and specify the PREFIX parameter with a value that contains 25 characters or less.

**ANR83 The
98E REMOVE=UNTIL
EEFULL option
is not supported
with the MOVE
DRMEDIA
command for
librarylibrary
name with
library type
library type.**

Explanation

The MOVE DRMEDIA command does not support the option as REMOVE=UNTILEEFULL for this library type.

System action

The operation will fail.

User response

This option is only supported with the library type SCSI. Remove the REMOVE=UNTILEEFULL option and perform the operation again.

**ANR83 The IBM Storage
99E Protect server
receives a
status as acsls
statuse from
ACSLs server.**

Explanation

The ACSLS CSI media server does not receive a response from IBM Storage Protect server.

System action

The operation will fail.

User response

This is a communication problem. Check configurations of the network adapter and its

driver and then perform the operation again.

**ANR84 Library library
00I name defined.**

Explanation

The designated library has been successfully defined.

System action

The library is defined and recorded in the database.

User response

None.

**ANR84 Command:
01E Invalid library
name library
name.**

Explanation

The designated library name is invalid; either it contains too many characters, or some of the characters are invalid.

System action

The command is not processed.

User response

Reissue the command using a valid library name.

**ANR84 Command:
02E Library library
name is already
defined.**

Explanation

The designated library cannot be defined because it already exists.

System action

The command is not processed.

User response

If you want to define an additional library, reissue the command with a different library name.

**ANR84 Command:
03E Operation not
allowed for
library type
libraries.**

Explanation

The requested operation is not allowed for libraries of the given type.

System action

The command is not processed.

User response

None.

**ANR84 Drive Drive
04I name defined in
library library
name.**

Explanation

The designated drive has been successfully defined as a member of the specified library.

System action

The drive is defined and recorded in the database.

User response

None.

**ANR84 Command:
05E Invalid drive
name drive
name.**

Explanation

The designated drive name is invalid; either it contains too many

characters, or some of the characters are invalid.

System action

The command is not processed.

User response

Reissue the command using a valid drive name.

**ANR84 Command: Drive
06E drive name is
already defined
in library library
name.**

Explanation

The designated drive cannot be defined because it has already been defined for the specified library.

System action

The command is not processed.

User response

If you want to define an additional drive, reissue the command with a different drive name.

**ANR84 Command: The
07E MODEL
parameter is
required for this
command.**

Explanation

The MODEL parameter has not been provided; it is required.

System action

The command is not processed.

User response

Reissue the command using the MODEL parameter.

ANR84 08E Command: The **DEVICE** parameter is required for this command.

Explanation

The DEVICE parameter has not been provided; it is required.

System action

The command is not processed.

User response

Reissue the command using the DEVICE parameter.

ANR84 09E Command: Library *library name* is not defined.

Explanation

The designated library has not been defined.

System action

The command is not processed.

User response

Reissue the command using a different library name, or define the library before retrying the command.

ANR84 10I Library *library name* deleted.

Explanation

The designated library has been deleted successfully.

System action

The library is deleted.

User response

None.

ANR84 11E Command: One or more drives are still defined in library *library name*.

Explanation

The command failed because there are drives defined to the designated library. For the DELETE LIBRARY and PERFORM LIBACTION (ACTION=DEFINE) commands, the specified library cannot have drives currently defined within the library.

System action

The command is not processed.

User response

Delete all drives from the library, and reissue the command.

ANR84 12I Drive *drive name* deleted from library *library name*.

Explanation

The designated drive has been deleted successfully from the specified library.

System action

The drive is deleted.

User response

None.

ANR84 13E Command: Drive *drive name* is currently in use.

Explanation

The designated drive cannot be deleted or updated because it is currently in use.

System action

The command is not processed.

User response

Wait until the drive is no longer in use, and reissue the command.

ANR84 14E Command: Drive *drive name* is not defined in library *library name*.

Explanation

The designated drive has not been defined in the given library.

System action

The command is not processed.

User response

Reissue the command using a different drive name. If appropriate, define the drive before retrying the command.

ANR84 15E Command: The *parameter* parameter is required for this command.

Explanation

The specified parameter must be provided when processing the given command.

System action

The command is not processed.

User response

Reissue the command, providing the required parameter value.

ANR84 16E Command: The *parameter* parameter is invalid for library type *library type*.

Explanation

The specified parameter is not valid for libraries of the given type. The scratch category must be at least 2 less than the private category for 349x libraries.

System action

The command is not processed.

User response

Reissue the command, using only the proper parameters. If using the scratch category make sure it is at least 2 less than the private category.

ANR84 17E Command: The *parameter* parameter is invalid for drives in *library type* libraries.

Explanation

The specified parameter is not allowed when defining or updating drives in a library of the given type.

System action

The command is not processed.

User response

Reissue the command, using only the proper parameters.

ANR84 Command: An I/O error occurred while accessing library library name.

Explanation

An I/O error occurs while accessing the designated library.

System action

The operation fails.

User response

To resolve the issue, complete the following steps: 1. For each drive in the target library, issue the QUERY DRIVE command and specify FORMAT=DETAILED. For example, if the drive is named DRIVE1 and the drive is defined in library LIBRARY1, you would issue the following command: query drive library1 drive1 format=detailed 2. In the command output, locate the Element value, which specifies the element address of the drive. Note the

value. 3. Compare the Element value from the QUERY DRIVE command with the ELEMENT value that is used for the element address when you define the drive with the DEFINE DRIVE command or update the drive with the UPDATE DRIVE command: - If the Element values match, the drive associated with this element address is already defined. Check the library configuration, and then use the correct drive element address for the ELEMENT parameter when you define the target drive. - If the Element values do not match, the drive associated with this element address might not be defined. Check the library configuration, and then use the correct drive element address for the ELEMENT parameter when you update the target drive. 4. Ensure that the library is powered on and ready. 5. If the library has an access door, ensure that the door is closed. 6. Retry the operation.

ANR84 Command: The drive or element conflicts with an existing drive in library library name.

Explanation

Either there are no more physical drives in the library, or the specified ELEMENT parameter conflicts with an existing defined drive in the given library. If this error occurred during a restore db operation, the physical tape device environment

or configuration has changed. The original tape drives were removed or are offline.

System action

The command is not processed.

User response

Specify a valid ELEMENT parameter that is not used by any other drive in the library. If this error occurred during a restore db operation, check the physical device configuration. Ensure the definition of devices in the devconf.dat file matches the physical device configuration.

ANR84 Command: An I/O error occurred while accessing drive drive name.

Explanation

An I/O error occurs while accessing the specified drive.

System action

The operation fails.

User response

Ensure that the DEVICE parameter associated with the drive is identified correctly in the DEFINE PATH command, and that the drive is currently powered on and ready. After checking and correcting these potential problems, retry the command.

ANR84 Command: Unable to start a process for this command.

Explanation

The server cannot start a background process to carry out the designated command.

System action

The operation fails.

User response

Check for and correct memory shortages or other server resource constraints, and reissue the command.

ANR84 Command: Operation for library library name started as process process ID.

Explanation

A volume check-in process has been started to handle the insertion of a volume into the given library. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to the CHECKIN LIBVOLUME command entered by an administrator.

User response

To obtain status on the process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR84 CHECKIN LIBVOLUME process for

library *library name* has been canceled.

Explanation

A background server process that has been working to check in one or more volumes for the given library is canceled by the CANCEL PROCESS command.

System action

The server process is ended and server operation continues.

User response

None.

ANR84 24I Checking in volume *volume name* in library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CHECKIN LIBVOLUME process on the server. The given volume is being checked in to the designated library.

System action

The background process operation continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR84 25I Checking in volumes in search mode in library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CHECKIN LIBVOLUME process on the server. Volumes are being checked into the given library automatically using a search for previously-unknown volumes.

System action

The background process operation continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR84 26E CHECKIN LIBVOLUME for volume *volume name* in library *library name* failed.

Explanation

The background process for a CHECKIN LIBVOLUME command has failed.

System action

The background process ends, but the volume has not been checked into the library.

User response

For manual library, make sure the library and drive devices that associated with this command are powered on and ready, and then reissue the command. For SCSI library, if SEARCH=NO is

used, the server selects only the volume in the first entry/exit port for the target volume location. Make sure that the target volume locates in the first entry/exit port, and then reissue the command.

ANR84 27I CHECKIN LIBVOLUME for volume *volume name* in library *library name* completed successfully.

Explanation

The specified volume was successfully checked in to the library during processing of a CHECKIN LIBVOLUME or LABEL LIBVOLUME command.

System action

The volume is made available for mounting in the given library.

User response

None.

ANR84 28E Command: The STATUS parameter is required for this command.

Explanation

The STATUS parameter must be provided with the given command.

System action

The command is not processed.

User response

Reissue the command, and provide a valid STATUS parameter value.

ANR84 29E Command: No drives are currently defined in library *library name*.

Explanation

The command cannot be issued until at least one drive has been defined in the given library.

System action

The command is not processed.

User response

Define a drive in the library, using the DEFINE DRIVE command, as well as a path to the drive, using the DEFINE PATH command. Then retry the failed command.

ANR84 30I Volume *volume name* has been checked into library *library name*.

Explanation

A search-mode CHECKIN LIBVOLUME process has found the given volume and automatically checked it into the library.

System action

The volume is added to the given library's inventory.

User response

None.

ANR84 31I The CHECKIN LIBVOLUME process is completed for library *library name*; volume

count volumes were found and added to the library's inventory.

Explanation

A CHECKIN LIBVOLUME command was issued with SEARCH=YES to find volumes that were not checked in. The specified number of volumes were identified and added to the library's inventory.

System action

The volumes are available for use by the server.

User response

If you use the IBM Tape Diagnostic Tool or the IBM Storage Protect lbtest utility to move tape volumes from their home slots to other slots, the server does not check in the volumes to the library. To ensure that the volumes are checked in, complete the following steps: 1. To synchronize the library inventory with the tape device inventory, issue the AUDIT LIBRARY command. 2. To check in the tape volumes, issue the CHECKIN LIBVOLUME command.

ANR84 Command:
32E **Volume *volume name* is already present in library *library name*.**

Explanation

The specified volume cannot be checked into the given library because it is already present.

System action

The command is not processed.

User response

Provide the name of a volume that is not already present in the given library. Use the QUERY LIBVOLUME command to obtain a full list of volumes that have already been checked into the library.

ANR84 Command:
33E **Volume *volume name* does not exist in library *library name*.**

Explanation

The volume cannot be accessed because it does not exist in the library.

System action

The command is not processed.

User response

Specify the name of a volume that is in the library. Use the QUERY LIBVOLUME command to obtain a full list of volumes that reside in the library. If you are using the AUDIT LIBVOLUME command, the volume might be in use by another operation, or does not exist in the library.

ANR84 Command:
34I **Operation for volume *volume name* in library *library name* started as process *process ID*.**

Explanation

A volume check-out process has been started to handle the removal of a volume from the given library. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to the CHECKOUT LIBVOLUME command entered by an administrator.

User response

To obtain status on the process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR84 CHECKOUT
35I **LIBVOLUME for volume *volume name* in library *library name* has been canceled.**

Explanation

A background server process that has been working to check out the volume from the given library is canceled by the CANCEL PROCESS command.

System action

The server process is ended and server operation continues.

User response

None.

ANR84 Checking out
36I **volume *volume***

name from library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CHECKOUT LIBVOLUME process on the server.

System action

The background process operation continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR84 CHECKOUT
37E **LIBVOLUME for volume *volume name* in library *library name* failed.**

Explanation

The background process for a CHECKOUT LIBVOLUME command has failed.

System action

The background process ends, but the volume has not been checked out of the library.

User response

Make sure the library and drive devices associated with this command are powered on and ready, then retry the command.

ANR84 CHECKOUT
38I **LIBVOLUME for volume *volume name* in library**

**library name
completed
successfully.**

Explanation

The background process for a CHECKOUT LIBVOLUME command has completed successfully.

System action

The volume is either deleted from the library's inventory (if its status is something other than DATA) or marked not present (if its status is DATA).

User response

None.

**ANR84 library type
39I library library
name is ready
for operations.**

Explanation

The initialization process for the given library has completed successfully, and the library is ready for use.

System action

The library is made ready for use.

User response

None.

**ANR84 Initialization
40E failed for library
type library
library name;
will retry in
delay time
minute(s).**

Explanation

The initialization process for the given library has failed. It will be retried automatically after the specified amount of time has elapsed.

System action

The initialization will be retried later.

User response

Ensure that the library device is powered on and ready. If the library has an access door, make sure it is in the closed position.

**ANR84 Initialization
41E failed for library
type library
library name.**

Explanation

The initialization process for the given library has failed, and will not be retried until the next time the server needs to access the library.

System action

The library is made temporarily unavailable.

User response

Make sure the library is powered on and attached.

**ANR84 Command:
42E Volume volume
name in library
library name is
currently in use.**

Explanation

The command cannot be processed because the specified volume is already being used for another operation.

System action

The command is not processed.

User response

Wait until the conflicting volume activity has completed, and then reissue the command. If the volume is currently mounted, but idle, you can dismount it with the DISMOUNT VOLUME command and then retry this operation.

**ANR84 Command:
43E Volume volume
name in library
library name
cannot be
assigned a
status of
SCRATCH.**

Explanation

The volume cannot be assigned to the given library's scratch pool because there is a storage pool volume defined or a volume in the volume history file with this volume name. Such a volume may still contain valid data. Assigning the volume to the library's scratch pool might result in a destructive overwrite of the volume's data.

System action

The command is not processed.

User response

Reissue the command, specifying that the volume be assigned a status of PRIVATE.

**ANR84 Command:
44E Library library
name is**

**currently
unavailable.**

Explanation

The requested operation cannot be completed because the specified library is unavailable for I/O operations. The library may still be carrying out its initialization operations.

System action

The command is not processed.

User response

Wait until the library initialization completes or the library becomes ready.

**ANR84 Volume volume
45I name in library
library name
updated.**

Explanation

The specified library volume has been updated successfully.

System action

The library volume inventory is updated.

User response

None.

**ANR84 Manual
46W intervention
required for
library library
name.**

Explanation

The specified library requires manual intervention.

System action

Current library activity will be delayed until the required intervention occurs.

User response

If the library has an access door, make sure it is in the closed position. If it has a cartridge carousel, make sure the carousel is installed. The server automatically detects when the appropriate action has been taken; it will then continue its operations.

ANR84 47E No drives are currently available in library *library name*.

Explanation

The attempted operation cannot be completed on the specified library because there are no available drives. A drive may be unavailable because an application other than the server may have the driver opened. This message may also be issued if a CHECKIN or LABEL command is issued and no drive is available to service the operation. This can be because all the drives are mounted by other processes or sessions, or the device type was incorrectly specified.

System action

The attempted operation is terminated.

User response

Use the QUERY DRIVE command to check the online status of the drives. Drives that are marked "Unavailable since hh:mm yy/mm/dd" are drives taken offline by the server at the time specified because of hardware failures or the inability to open the drive. If the attempted operation is a CHECKIN or LABEL command, use the QUERY MOUNT command to determine if all the drives in the library are mounted and wait until one of these is available. If there are mounted volumes with an IDLE status, use the DISMOUNT VOLUME command to free its drive, and retry the original operation.

ANR84 48E Scratch volume *volume name* from library *library name* rejected - *volume name* is already in use.

Explanation

The designated volume has been used to satisfy a scratch mount, but the volume is already defined in a storage pool, or has been used to store server export, database dump, or database backup information as recorded in the server volume history file.

System action

The volume is rejected.

User response

Use a volume that is not in use, or check out and relabel the rejected volume, assigning it a new name in the process, or delete the existing volume that caused the name conflict.

ANR84 49E Scratch volume *volume name* rejected - *volume name* is already in use.

Explanation

The designated volume has been used to satisfy a scratch mount, but the volume is already defined in a storage pool, or has been used to store server export, database dump, or database backup information as recorded in the server volume history file.

System action

The volume is rejected.

User response

Use a volume that is not in use, or rename the rejected volume or delete the existing volume that caused the name conflict.

ANR84 50E Command: Library *library name* is currently in use.

Explanation

The designated library cannot be deleted or updated because it is currently in use for an I/O operation.

System action

The command is not processed.

User response

Wait until the library is no longer in use, and then retry the command.

ANR84 51I 349X library *library name* is ready for operations.

Explanation

The initialization process for the given library has completed successfully, and the library is ready for use.

System action

The library is made ready for use.

User response

None.

ANR84 52E Initialization failed for 349X library *library name*; will retry in *delay time* minute(s).

Explanation

The initialization process for the given library has failed. It is retried automatically after the specified amount of time has elapsed.

System action

The initialization will be retried later.

User response

Ensure that the library device is powered on and ready.

ANR84 53E Initialization failed for 349X library *library name*.

Explanation

The initialization process for the given library has failed and will not be retried until the next time the server needs to access the library.

System action

The library is made temporarily unavailable.

User response

None.

ANR84 54E Mismatch detected between external label (*volume name* from external label) and media label (*volume name* from media label) in 349X library *library name*.

Explanation

The external label of a volume was found to differ from its media label in the designated library.

System action

The volume will not be accessed.

User response

Remove the volume from the library and ensure that it is properly labeled.

ANR84 55E Volume *volume name* could not be located during audit of library *library*

***name*. Volume has been removed from the library inventory.**

Explanation

While processing an AUDIT LIBRARY command for the given library, the server cannot find the given volume in the library.

System action

The volume is removed from the library inventory.

User response

If the volume is needed, it should be located and checked into the library using the CHECKIN LIBVOLUME command.

ANR84 56E Multiple volumes named *volume name* were found during audit of library *library name*.

Explanation

While processing an AUDIT LIBRARY command for the given library, multiple physical volumes are found to have the same name.

System action

The first instance of the volume is retained in the server inventory; all other instances are ignored.

User response

Remove all of the redundant instances of the volume from the library. If the volume

which the server retained is found to be the incorrect one, it can be checked out with the CHECKOUT LIBVOLUME command; then the correct instance can be checked into the library with a CHECKIN LIBVOLUME command.

ANR84 57I Command: Operation for library *library name* started as process *process ID*.

Explanation

A library audit process has been started for the given library. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to the AUDIT LIBRARY command entered by an administrator.

User response

To obtain status on the process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR84 58I AUDIT LIBRARY process for library *library name* has been canceled.

Explanation

A background server process that has been working to audit the given library is canceled by

the CANCEL PROCESS command.

System action

The server process is ended and server operation continues.

User response

None.

ANR84 59I Auditing volume inventory for library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for an AUDIT LIBRARY process on the server.

System action

Server operation continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR84 60E AUDIT LIBRARY process for library *library name* failed.

Explanation

A background process that was initiated by the AUDIT LIBRARY command failed.

System action

System operations continue, but the background process ends.

User response

To resolve the issue, complete the following steps: 1. Review the activity log to determine whether other error or warning messages were issued during the audit process. Resolve any errors. 2. Ensure that the tape library and tape drives are powered on and ready for use. 3. Ensure that all drives are either empty or not in use. 4. Ensure that the paths that are associated with the tape drives are online. 5. If the file names for tape devices changed, ensure that the SANDISCOVERY server option is set to ON. 6. Reissue the AUDIT LIBRARY command.

ANR84 AUDIT LIBRARY 61I process for library *library name* completed successfully.

Explanation

The background process for an AUDIT LIBRARY command has completed successfully.

System action

The library inventory is updated to match the contents of the library as found during the audit operation.

User response

None.

ANR84 End-of-side 62I reached for device type *device type* volume *volume name*.

Explanation

The server has detected an end-of-side condition for the given two sided volume.

System action

The server will access the second side of the volume.

User response

None.

ANR84 Device type 63E volume *volume name* is write protected.

Explanation

The server has detected a write-protect condition for the given volume.

System action

The server will dismount the volume and continue processing with another volume.

User response

Adjust the write-protect switch on the volume so that writing is allowed. If the write-protect switch on the volume allows writing, verify that the device special file for the drive has proper read and write permissions, at the operating system layer, for the user who is starting the dsmserv process. If the volume is an optical volume and the write-protect switch is already set to allow writing, use the MOVE DATA command to move the data off of the volume. Rewritable volumes may

be reformatted and reused after the data is moved to another volume. If this error occurs on IBM 3592 tape drives, please check the server and storage agent versions. The server and storage agent support CHECKTAPEPOS option starting at version 8.1.11.

ANR84 command: 64E Invalid update request for library *library name*.

Explanation

An invalid update request has been made for the given library. This can occur if a new device name is given and the characteristics of the device do not match the characteristics of the original device.

System action

The server does not process the command.

User response

If a different type of library device has been installed, the old library definition must be deleted with a DELETE LIBRARY command, and a new library must be defined. The UPDATE LIBRARY command cannot be used in this case.

ANR84 Library library 65I *name* updated.

Explanation

An UPDATE LIBRARY request has been successfully processed for the given library.

System action

The server updates its information about the library.

User response

None.

ANR84 command: 66E Invalid update request for drive *drive name* in library *library name*.

Explanation

An invalid update request has been made for the given drive. This can occur if a new device name is given and the characteristics of the device do not match the characteristics of the original device.

System action

The server does not process the command.

User response

If a different type of drive has been installed, the old drive definition must be deleted with a DELETE DRIVE operation, and a new drive must be defined. The UPDATE DRIVE command cannot be used in this case.

ANR84 Drive drive 67I *name* in library *library name* updated.

Explanation

An UPDATE DRIVE request has been successfully processed for the given drive.

System action

The server updates its information about the drive.

User response

None.

ANR84 68I *device type volume volume name*
dismounted from drive drive name in library library name.

Explanation

The specified volume has been dismounted from the given drive.

System action

None.

User response

If the type of the given library is MANUAL, the operator may elect to remove the volume (which has already been ejected) from the drive and store it in an appropriate location. For automated libraries, this message is purely informational.

ANR84 69E *Dismount of device type volume volume name from drive drive name in library library name failed.*

Explanation

An attempt to dismount the designated volume failed due to an I/O error.

System action

None.

User response

If the type of the given library is MANUAL, the volume can be manually ejected and removed from the drive. For automated libraries, manual intervention may be required to correct the problem.

ANR84 70W *Initialization failure on drive drive name in library library name.*

Explanation

The specified drive could not be initialized at this time.

System action

The initialization of the specified library continues.

User response

An internal validation of the specified drive and its path failed. Ensure that the drive's path definition to the local server is correct. Examine all previous messages for information regarding the specified drive. If necessary, delete and redefine the path from the local server to the specified drive. After redefining the path or correcting any issues that were reported by related error messages, the drive's initialization is retried on the next attempt to mount the specified drive.

ANR84 71E *Server no longer polling drive drive name in library library name - path*

path will be marked off-line.

Explanation

The server is unable to use the mentioned drive via the specified path. This may be for the following reasons:

- The drive cannot be opened
- In the case of a 3494 or a library that can be partitioned, the drive may be unavailable to the library manager, may be in use by another application, or may be loaded with a cartridge not labeled for server use.

System action

The path to the drive is offline and is not used for tape operations.

User response

Determine the reason the path to the drive is inaccessible, such as hardware errors reported in the system logs. Render any needed corrections to the hardware. Then the path may be made online by issuing the UPDATE PATH command with the ONLINE=YES option.

ANR84 72I *Error reading label of volume in drive drive name of library library name.*

Explanation

While processing a search-mode CHECKIN LIBVOLUME command for the designated library, the server finds a volume

whose label cannot be read.

System action

The volume is dismounted and is not checked into the library.

User response

Remove the volume from the library and ensure that it is properly labeled. After doing so, the volume can be checked into the library.

ANR84 73I *Volume volume name was found in storage element slot element address in library library name. It may still be in the drive.*

Explanation

The specified volume was found in the storage slot of a cleaner cartridge. After it was loaded into a drive for cleaning, IBM Storage Protect determined that it is not a cleaner cartridge. IBM Storage Protect encountered an error trying to move the cartridge back to the storage slot of the cleaner cartridge. If the volume is a storage pool volume, IBM Storage Protect already attempted to make it unavailable. Review the output of the QUERY VOLUME F=D command for storage pool volumes. Review the output of the QUERY VOLHISTORY command for non-storage pool volumes.

System action

None.

User response

Verify all other cleaner cartridges are in the correct storage slots. Issue the QUERY LIBVOLUME command to obtain the storage slots of all the cartridges currently checked into IBM Storage Protect. Remove the cartridge in the storage slot identified in the ANR8911W message. Remove the specified volume from the drive. Issue an AUDIT LIBRARY command against the library.

ANR84 74E *Command: One or more paths are still defined to library library name.*

Explanation

The designated library cannot be deleted because there are still paths defined to it.

System action

The command is not processed.

User response

Delete all paths to this library, and reissue the command.

ANR84 75I *Dismount of volume volume name failed. It may still be in the drive.*

Explanation

The specified volume could not be dismounted. IBM Storage Protect

encountered an error trying to dismount the volume. If the volume is a storage pool volume, IBM Storage Protect already attempted to make it unavailable. Review the output of the QUERY VOLUME F=D command for storage pool volumes. Review the output of the QUERY VOLHISTORY command for non-storage pool volumes.

System action

None.

User response

Review message ANR8469E in the activity log. Check if the volume is still loaded in the drive. If the volume is not in the drive, determine where the volume is located in the library.

ANR84 76E *The operation failed because it is not supported for the library type of library library name.*

Explanation

Some operations are supported only for specific library types. For example, if you issue the PERFORM LIBACTION command for a shared library, you must specify a library manager. If you specify a library client of a shared library, the command fails.

System action

System operation continues.

User response

Complete the following steps: 1. To determine the library type, issue the QUERY LIBRARY command. For example, if the library is named LIB1, issue the following command: query library lib1 2. To learn about restrictions on the operation that failed, review the documentation for the command. 3. Reissue the command with valid values.

ANR84 77E *Device type device type is incorrect for drive drive name.*

Explanation

The device type of the specified drive on the library client is not compatible with the device type for the same drive on the library manager.

System action

The operation fails.

User response

Delete the drive definition on the library client, and re-define the drive specifying the correct device. If this does not correct the problem, contact your service representative for assistance.

ANR84 78W *Invalid home slot address in inventory for library library name; volume = volume name;slot = slot number.*

Explanation

The specified volume's home slot in the library inventory does not match the database inventory.

System action

The operation fails.

User response

Run 'audit library' against the specified library.

ANR84 79W *Unable to audit slot-element slot-element of library library name.*

Explanation

The library audit process was unable to audit storage slot with the specified element address. This is probably due to no drive device being available into which to load the cartridge. It can also be due to library or drive I/O errors occurring during the audit process.

System action

The AUDIT LIBRARY command fails.

User response

Verify that for every type of cartridge in the library at least one drive is defined that can read the media, and that the drive is online and working properly. Check the activity log for I/O errors related to hardware failure and repair.

ANR84 80E *The drive Drive Name was not*

**found for library
Library Name.**

Explanation

The missing drive needs to be defined to successfully run the current operation.

System action

The operation fails.

User response

Make sure that the drive is defined. If macros are being used, the COMMIT command needs to be issued after the DEFINE DRIVE. Otherwise, this could indicate a server internal error.

ANR84 81I The library *library name* already has an AUDIT LIBRARY operation pending mount activity.

Explanation

Libraries of type SHARED can only have one AUDIT LIBRARY operation waiting on mount activity. All subsequent AUDIT LIBRARY operations will be canceled.

System action

The server process is ended and server operation continues.

User response

None.

ANR84 82E The checkout volume *volume name* failed because the entry/exit port of library *library*

name is full. Please remove the volume(s) from the entry/exit port and re-issue the command.

Explanation

The indicated operation has failed because the entry/exit port of the specified library is full.

System action

The command fails.

User response

Remove the volume(s) from the entry/exit port and re-issue the command to process any remaining eligible volumes.

ANR84 83W A device class can not be found for the library *library name*.

Explanation

A library client audits a SHARED type Library, but there is no device class defined for that library.

System action

The AUDIT LIBRARY command fails.

User response

Define or update a device class for the library using the DEFINE DEVCLASS or UPDATE DEVCLASS command.

ANR84 84E No drives are available to be mounted in *MODE* mode with format

FORMAT in library *LIBRARY NAME*.

Explanation

The attempted operation cannot be completed on the specified library. Either there are no available drives with the specified format, or the volume has the wrong access mode. A drive can be unavailable because another application opened the drive. This message can also be issued if a CHECKIN or LABEL command is issued and no drive is available to service the operation. This can occur when all drives are mounted by other processes or sessions, or the device type was incorrectly specified.

System action

The attempted operation ends.

User response

Use the QUERY DRIVE command to check the online status of the drives. Drives that are marked "Unavailable since hh:mm yy/mm/dd" are drives taken offline by the server at the time specified because of hardware failures or the inability to open the drive. Use the QUERY MOUNT command to query mounted drives and their mount mode. If there are mounted volumes with an IDLE status, use the DISMOUNT VOLUME command to free the drive, and retry the original operation.

ANR84 85E Unable to open a SCSI device *drive name*, error code=*error value* set by server.

Explanation

The error code, set by server IBM Storage Protect, indicates that the specified device did not respond to the open system function call. This error can occur if the device was removed or powered off, or by firmware or hardware issues. The error can also be caused by a hardware issue with an adapter that is connected to the host system.

System action

System operation continues, but the transaction that requires the specified device fails.

User response

To resolve the error, complete the following steps:

1. Ensure that the device is online and connected to the host system.
2. Reinitialize the device by turning it off for at least 30 seconds and then turning it back on.
3. If the device is still not in a normal state, contact the device vendor to fix the issue.
4. If the error is related to the adapter, contact the adapter vendor to fix the issue or replace the adapter.

ANR84 86I Mount point in device class
Device class name is reserved -- owning server: owner name, status: RESERVED (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the server indicates that there is a mount point reserved for future I/O operations in the given device class. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 87I Mount point in device class
Device class name is waiting for the volume mount to complete -- owning server: owner name, status: WAITING FOR VOLUME (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the server indicates that there is a mount point

in the given device class waiting for the volume mount to complete. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 88I Device type volume volume name is mounted mount mode in drive drive name -- owning server: owner name, status: IN USE (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted in the specified drive. The volume is currently in use, meaning that read or write operations, or both, are being performed. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 89I Device type volume volume name is mounted mount mode in drive

drive name -- owning server: owner name, status: IDLE (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted in the specified drive. The volume is currently idle, meaning no active operations are being performed. If the volume remains in the idle state for the amount of time specified by the device class mount retention period, it will be automatically dismounted. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 90I Device type volume volume name is mounted mount mode in drive drive name -- owning server: owner name, status: DISMOUNTING (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the

server indicates that the given volume is mounted in the specified drive. The volume is currently being dismounted by the server. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 91I Device type volume volume name is mounted mount mode in drive drive name -- owning server: owner name, status: RETRY DISMOUNT FAILURE (session: session ID, process: process number).

Explanation

In response to a QUERY MOUNT command, the server indicates that it is currently retrying the dismount of the given volume because of a failure during the previous dismount from the specified drive. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 92I *Device type volume volume name is mounted mount mode in drive drive name -- owning server: owner name, status: RETRY (session: session ID, process: process number).*

Explanation

In response to a QUERY MOUNT command, the server indicates that the given volume is mounted for I/O operations. The volume is currently in RETRY, meaning an attempt is being made to re-establish communications with another server. If the volume remains in the retry state for the amount of time specified by the device class retry period, the operation will fail and the volume will be automatically dismounted. The session and process values are relative to the server that owns this mount point.

System action

None.

User response

None.

ANR84 93I *device type volume volume name mounted in drive drive name in library library name.*

Explanation

The specified volume has been mounted in the specified drive.

System action

None.

User response

For automated libraries, this message is purely informational.

ANR84 94E *Command: An option specified is not valid for library type libraries.*

Explanation

A requested option is not valid for libraries of the given type for the specified command.

System action

The command is not processed.

User response

None.

ANR84 95E *Device type volume volume name cannot be written by BACKUP DB operation.*

Explanation

The specified volume already exists or contains data, so that the server cannot allow new BACKUP DB data to be written to it. Or there is no space available on the destination filespace to write this backup to.

System action

The server detects that the given volume already contains some data that would be overwritten by the requested BACKUP DB command, or that there is not enough space available.

User response

If the specified volume does not contain any valuable data, delete it and retry the BACKUP DB command.

ANR84 96E *Device class device class not defined in device configuration information file.*

Explanation

The command that has been issued requires that the specified device class be defined in the device configuration information file. This definition was not found or the statements in the file are in the wrong order.

System action

The command is not processed.

User response

Reissue the command, and specify a valid device class. Refresh your device configuration information file by issuing the BACKUP DEVCONFIG command.

ANR84 97E *Library library not defined in device configuration information file.*

Explanation

The specified command requires that the specified library be defined in the device configuration information file. This definition was not found or the statements in the file are in the wrong order.

System action

The command is not processed.

User response

Refresh your device configuration information file by issuing the BACKUP DEVCONFIG command. Make sure a library is defined for the device class. Reissue the command.

ANR84 98E *Drive not defined for library library in device configuration information file.*

Explanation

The specified command requires that the specified drive be defined in the device configuration information file for the specified library. This definition was not found or the statements in the file are in the wrong order.

System action

The command is not processed.

User response

Refresh your device configuration information file by issuing the

BACKUP DEVCONFIG command. Make sure a drive is defined for the library associated with the device class. Reissue the command.

ANR84 Command 99I accepted.

Explanation

The command is accepted and processed by the server.

System action

The server processes the command.

User response

None.

ANR85 No valid path is 00E defined for library library name or any of its drives in device configuration information file.

Explanation

The specified command requires that a path be defined in the device configuration information file for the specified library and its drive. This valid definition was not found, or the statements in the file are in the wrong order.

System action

The command is not processed.

User response

Refresh your device configuration information file by issuing the BACKUP DEVCONFIG command. Make sure

a path is defined for the library and its drive associated with the device class. Verify the correct source is used in these path definitions. If the default server name is not used as the source, a SET SERVERNAME command is required in the device configuration information file. Reissue the command.

ANR85 System return 01E code return code received opening volume server volume name with file name file name

Explanation

The server or storage agent attempted to access the file name indicated but failed to open the volume. The indicated system return code was received. The actual volume name corresponds to the file name that the server uses. The server volume name and the file name may be the same when the server experiences a failure in opening the file.

System action

The volume is not opened.

User response

The server or storage agent can recover from some failures by requesting access to different volumes. If there is a directory definition problem, this message may be displayed multiple times during retries with different volumes.

The directory names associated with the device class definition in the server should be checked for correctness in the number and names of directory entries. PATH definitions for each of the FILE drives should be checked that the number of directories in the PATH definition match the number in the server's device class definition and that directories exist and are accessible to servers and storage agents accessing server directories via their own path names. For example, if the server has the following definition:

DEFINE DEVCLASS FILE
DEVTYPE=FILE
DIR=K:\FILECLASS\DIR1,
L:\FILECLASS\DIR2 and a storage agent has the following PATH definition:
DEFINE PATH STA FILE1
SRCTYPE=SERVER
DESTTYPE=DRIVE
LIBRARY=FILE
DEVICE=FILE
DIR=X:\DIR1,X:\DIR2 then system STA must have drive X set to access directory L:\FILECLASS on the server so that directories DIR1 and DIR2 correspond to the correct destinations on the storage agent and that the number of directories match between the PATH and the DEVCLASS definitions.

ANR85 Errno errno 02E received checking WORM directory directory name on Filer.

Explanation

The server attempted to access the named directory on the NetApp SnapLock Filer, but the attempt failed with the indicated error code.

System action

If you were trying to define a storage pool or update a device class associated with a storage pool, the command fails. If this error is encountered during server initialization, server initialization continues, but operations involving this storage pool will not be allowed until the issue is resolved.

User response

This may be caused by an error in the NetApp Filer or with the communications between your server and the NetApp Filer. Verify that the network is operational, that the SnapLock Filer is accessible from your server, and consult NetApp SnapLock Filer documentation to resolve the issue; then, retry the command.

ANR85 A failure 03E occurred in writing to volume server volume name.

Explanation

The server or storage agent was writing to the indicated volume name when a failure occurred.

System action

The server or storage agent stops writing to the specified volume.

User response

The server or storage agent can recover from some failures by requesting access to different volumes. If there is a directory definition problem, this message may be displayed multiple times during retries with different volumes. The directory names associated with the device class definition in the server should be checked for correctness in the number and names of directory entries.

The permissions associated with newly created files should be checked to ensure the server and storage agent can write to newly created files. Depending on the system, a mask value may need to be adjusted. The system error or event log should be checked for indications of hardware or software errors from file systems.

For a remotely mounted file system, ensure that the remote file system is mounted and useable to the storage agent. The file system should be checked to ensure that sufficient space is available. While the server checks space, multiple device classes or servers using the same file system can cause the server's space checking to

underestimate available space.

For storage agents, PATH definitions for each of the FILE drives should be checked to ensure that the number of directories in the PATH definition matches the number in the server's device class definition and that directories exist and are accessible to servers and storage agents accessing server directories via their own path names. For example, if the server has the following definition:

```
DEFINE DEVCLASS FILE
DEVTYPE=FILE
DIR=K:\FILECLASS\DIR1,
L:\FILECLASS\DIR2 and a
storage agent has the
following PATH definition:
DEFINE PATH STA FILE1
SRCTYPE=SERVER
DESTTYPE=DRIVE
LIBRARY=FILE
DEVICE=FILE
DIR=X:\DIR1,X:\DIR2
then system STA must
have drive X set to access
directory L:\FILECLASS
on the server so that
directories DIR1 and
DIR2 correspond to the
correct destinations on
the storage agent and
that the number of
directories match
between the PATH and
the DEVCLASS
definitions.
```

ANR85 04E A failure occurred in flushing data to volume server volume name.

Explanation

The server or storage agent was writing to the indicated volume name when a failure occurred. The failure occurred

during a flush operation when the server was attempting to synchronize its progress of data written with that of the file system. If the file system becomes full, it is possible to receive no error indications until the flush operation is attempted.

System action

The server or storage agent stops writing to the specified volume. The transaction in progress is rolled back.

User response

The server or storage agent can recover from some failures by requesting access to different volumes. If there is a directory definition problem, this message may be displayed multiple times during retries with different volumes. The directory names associated with the device class definition in the server should be checked for correctness in the number and names of directory entries.

The permissions associated with newly created files should be checked to ensure the server and storage agent can write to newly created files. Depending on the system, a mask value may need to be adjusted. The system error or event log should be checked for indications of hardware or software errors from file systems.

For a remotely mounted file system, ensure that

the remote file system is mounted and useable to the storage agent. The file system should be checked to ensure that sufficient space is available. While the server checks space, multiple device classes or servers using the same file system can cause the server's space checking to underestimate available space.

For storage agents, PATH definitions for each of the FILE drives should be checked to ensure that the number of directories in the PATH definition matches the number in the server's device class definition and that directories exist and are accessible to servers and storage agents accessing server directories via their own path names. For example, if the server has the following definition:

```
DEFINE DEVCLASS FILE
DEVTYPE=FILE
DIR=K:\FILECLASS\DIR1,
L:\FILECLASS\DIR2 and a
storage agent has the
following PATH definition:
DEFINE PATH STA FILE1
SRCTYPE=SERVER
DESTTYPE=DRIVE
LIBRARY=FILE
DEVICE=FILE
DIR=X:\DIR1,X:\DIR2
then system STA must
have drive X set to access
directory L:\FILECLASS
on the server so that
directories DIR1 and
DIR2 correspond to the
correct destinations on
the storage agent and
that the number of
directories match
between the PATH and
the DEVCLASS
definitions.
```

ANR85 05I **Verifying path definitions for library *library name* between storage agent *storage agent* and library manager *primary library manager*. Processing *library count* out of total *library count* libraries.**

Explanation

The specified library path definition is being verified for storage agent initialization.

System action

The server processes the verification for the specified library.

User response

If the server does not finish verification for all the counted shared libraries, verify connectivity and configuration of the primary library manager paths. Check the library manager of the last storage agent displayed in the library path verification message.

ANR85 06E **The library *library name* is not compatible with stand-alone, utility operations.**

Explanation

The specified library cannot operate in stand-alone mode such as DUMP DB or RESTORE DB.

System action

The requested operation fails.

User response

If this is a FILE library, use a device class that does not use a FILE library. A FILE device class does not need a library, and thus, can be updated with LIBRARY="" and SHARED=NO. Update your device configuration file appropriately for the stand-alone operation, and then if needed, return the device class to its original state using a FILE library or with SHARED=YES when the server is running.

ANR85 07W **Volume *volume name* is using an encryption key that is not unique and therefore is not secure.**

Explanation

Each volume should have a unique encryption key. This volume inappropriately shares an encryption key with other volumes.

System action

The operation completes.

User response

Moving the data from this volume to new volume will create a unique encryption key for the new volume and make the data more secure. Before moving the data, mark this volume READONLY to prevent IBM Storage

Protect from appending data to the volume. Then, use the MOVE DATA command to move the data from this volume to a new volume in your encryption storage pool.

ANR85 08E **Device type *volume volume name* cannot be written by Db2's archive log operation.**

Explanation

The specified volume already exists or contains data, so that the server cannot allow new archive log data to be written to it. Or there is no space available on the destination filespace to write this backup to.

System action

The server detects that the given volume already contains some data that would be overwritten by the DB's archive log operation, or that there is not enough space available.

User response

If the specified volume does not contain any valuable data, delete it.

ANR85 09E **No compatible drives are available for device class *devclass name*.**

Explanation

The attempted operation cannot be completed for the specified device class because there are no available drives. This message can indicate an invalid FORMAT or

DEVTYPE value for the specified device class. The message can also indicate that the FORMAT and DEVTYPE values are valid, but no compatible drives are online.

System action

The attempted operation fails.

User response

Use the QUERY DEVCLASS command to check the device class's FORMAT and DEVTYPE values. Compare these values with the equivalent values for QUERY DRIVE F=D. There must be at least one online drive with DEVTYPE and FORMAT values that are compatible with the device class attempting this operation. If there are no compatible drives, correct this configuration and retry the operation.

ANR85 10E **No valid path is defined for the ZOSMEDIA library *library name*.**

Explanation

The storage operation requires that a path be defined to the ZOSMEDIA library. Without a PATH defined to the library, the mount request cannot resolve the z/OS Media server name.

System action

The mount request is not processed.

User response

Define a library path and specify the z/OS Media server with the ZOSMEDIASERVER parameter. For instance: consider a ZOSMEDIA library named ZLIB1 and an IBM Storage Protect server name of SERVER1. The z/OS Media server that is accessible using IP address of 9.8.7.6 and is listening on port 1492 and is named is ZMEDSRV1. The following commands properly configure server SERVER1 for accessing ZLIB1. .
DEFINE LIBRARY ZLIB1
LIBTYPE=ZOSMEDIA
DEFINE SERVER
ZMEDSRV1
SERVERPASS=SECRET
HLA=9.8.7.6 LLA=1492
DEFINE PATH SERVER1
ZLIB1 SRCTYPE=SERVER
DESTTYPE=LIBRARY
ZOSMEDIASERVER=ZME
DSRV1 .

**ANR85 Unable to
11E resolve
ZOSMEDIASERV
ER
mediaservernam
e from the
library path.**

Explanation

The storage operation requires that a server definition exist that matches the ZOSMEDIASERVER name of the library path. Without a SERVER defined, the storage operation can not be completed because the request is unable to determine the z/OS Media servers HLA and LLA.

System action

The mount request is not processed.

User response

Determine the High Level Address (HLA) and Low Level Address (LLA) of the z/OS Media server and use DEFINE SERVER command to build a server definition that represents the z/OS Media server. The servername that is used to define the z/OS Media server must match the ZOSMEDIASERVER name of the library PATH. For instance: consider a ZOSMEDIA library named ZLIB1 and an IBM Storage Protect server name of SERVER1. The z/OS Media server that is accessible using IP address of 9.8.7.6 and is listening on port 1492 and is named is ZMEDSRV1. The following commands properly configure server SERVER1 for accessing ZLIB1. .
DEFINE LIBRARY ZLIB1
LIBTYPE=ZOSMEDIA
DEFINE SERVER
ZMEDSRV1
SERVERPASS=SECRET
HLA=9.8.7.6 LLA=1492
DEFINE PATH SERVER1
ZLIB1 SRCTYPE=SERVER
DESTTYPE=LIBRARY
ZOSMEDIASERVER=ZME
DSRV1

**ANR85 Cannot specify
12E RETENTION
with
EXPIRATION
during DEFINE
or UPDATE
DEVCLASS.**

Explanation

The DEFINE DEVCLASS cannot specify both RETENTION and EXPIRATION, they are conflict parameters.

System action

The command request is not processed.

User response

If a device class has an existing EXPIRATION value, the devclass cannot update if RETENTION is specified. If a device class has existing RETENTION value, the device class cannot update if EXPIRATION is specified. The two parameters (RETENTION and EXPIRATION) are mutually exclusive.

**ANR85 zOS Media
13E Server (server
name) password
is too long to
use for
authentication
with Tivoli
Storage
Manager for
z/OS Media. The
password
cannot exceed
16 characters.**

Explanation

The SERVERPASSWORD must be specified with 16 characters or less. The password must match the passphrase option on the target z/OS Media server.

System action

The operation is not processed.

User response

Issue the UPDATE SERVER command and specify a SERVERPASSWORD that does not exceed 16 characters and ensure it contains characters that match the passphrase option on the z/OS Media server.

**ANR85 Tivoli Storage
14W Manager for
z/OS Media
server (server
name) could not
extend the FILE
volume volume
name.**

Explanation

The z/OS Media server made an attempt to EXTEND the VSAM LDS FILE volume using the SECONDARYALLOCATION value from the FILE device class and failed.

System action

The WRITE operation fails and the FILE volume is marked "read-only".

User response

Allow Tivoli Storage Manager for z/OS Media server to create EA-enabled VSAM linear data set volumes. 1. Use SMS to manage the VSAM Linear data sets that are associated with the prefix attribute of the FILE device class. 2. Associate the data sets with a data class (an SMS construct) that specifies the extended format and extended addressability options. To make this association between data sets and the data class,

use an automatic class selection (ACS) routine to assign the Tivoli Storage Manager for z/OS Media VSAM linear data sets to the relevant SMS data class. The ACS routine does the assignment based on the data set name.

ANR85 15W The deletion of volume belonging to z/OS Media library is imminent, however the z/OS Media server is unreachable resulting in the IBM Storage Protect Server volume inventory reflecting the deleted volume.

Explanation

The z/OS Media server cannot be reached during a volume deletion request. The IBM Storage Protect server continues the operation even though the z/OS Media server cannot be reached.

System action

The volume is not deleted on the z/OS Media server.

User response

Determine why the z/OS Media server cannot be contacted. Examine the IBM Storage Protect activity log for message ANR8515W and carefully consider removing the associated dataset on the z/OS system.

ANR85 16W The z/OS Media server is unreachable at HLA and LLA .

Explanation

The z/OS Media server cannot be reached during a ZOSMEDIA library request. The IBM Storage Protect server may continue the operation even though the z/OS Media server cannot be reached.

System action

The operation likely fails.

User response

Determine why the z/OS Media server cannot be contacted.

ANR85 17E The z/OS Media server is reachable at HLA and LLA however fails to connect because of an authentication failure..

Explanation

The z/OS Media server could be reached during a ZOSMEDIA library request. However, authentication could not be completed. The IBM Storage Protect server will not continue the operation because the z/OS Media server connection can be authenticated.

System action

The operation fails.

User response

Determine why the z/OS Media server connection cannot be authenticated. Check to ensure the PASSPHRASE option on the Tivoli Storage Manager for z/OS Media server matches the serverpassword of the media server definition on the IBM Storage Protect Server. The password cannot exceed 16 characters.

ANR85 18E command: Invalid update request for drive drive name in library library name.

Explanation

An invalid request has been made for the specified drive. This drive is part of a virtual tape library(VTL). The requested operation does not apply for drives in a VTL.

System action

The server does not process the command.

User response

Do not attempt to change cleaning settings for virtual drives. If this library is not a VTL, use the UPDATE LIBRARY command to change the library type to SCSI and retry the operation.

ANR85 19E The z/OS Media server is unable to open volume using dataset name .

Explanation

The z/OS Media server cannot OPEN a volume during a ZOSMEDIA library request and the IBM Storage Protect server fails the operation.

System action

The operation likely fails.

User response

Determine why the z/OS Media server cannot OPEN the volume. Examine the z/OS Media server joblog, and the z/OS SYSLOG for error conditions associated with the volume or dataset name.

ANR85 20E Command: StorageTek Automated Cartridge System Library Software (ACSL) API module is not available from the system for ACSLS libraries.

Explanation

The operations of the ACSLS type library require the ACSLS API module loaded to the system. If this module is not loaded to the system, define ACSLS library will fail.

System action

The command is not processed.

User response

Ensure that ACSLS API module is installed to the system.

ANR85 21E Unable to allocate dataset dynalloc rc = dynalloc error = Hex and dynalloc info = .

Explanation

The z/OS Media server cannot allocate a dataset during a ZOSMEDIA library request and the IBM Storage Protect server fails the operation.

System action

The operation likely fails.

User response

Determine why the z/OS Media server cannot allocate the volume. Examine the z/OS Media server joblog for ANZ5031I messages for a summary of dynalloc related info and error messages. Review the z/OS SYSLOG for error conditions associated with the failed allocation request.

ANR85 22E The z/OS Media server is unreachable at HLA with LLA and fails to complete a connection because of a protocol violation.

Explanation

The z/OS Media server may not be listening on the target LLA port. The IBM Storage Protect server will not continue the operation because the z/OS Media server connection can be established.

System action

The operation fails.

User response

Determine why the z/OS Media server connection cannot be established. Check to ensure the z/OS Media server is listening on the target IP address and port address. The protocol violation indicates an application is listening on the target HLA port, however the application program is not a z/OS Media server. Check the HLA and LLA values on the server definition.

ANR85 23E The path from the source server to the destination library is taken offline.

Explanation

Ensure the z/OS Media server is running and listening on the appropriate port address. If the z/OS Media server is listening on the intended port address and the authentication is configured properly, there could a problem with the z/OS Media server version that requires the library path be taken offline.

System action

The library path is offline.

User response

Determine the service level the z/OS Media server. Check the current README for the installed IBM Storage Protect Server

by searching for z/OS Media server prerequisite specifications.

ANR85 24W The element address of the drive *drive name* might be incorrect in the library *library name*.

Explanation

The element=autodetect parameter on the DEFINE DRIVE command is not supported for a network attached SCSI (NAS) drive. An invalid element address will be assigned to the device if the option is used.

System action

The move tape volume operation fails.

User response

Issue the QUERY DRIVE f=d command to verify the value in the Element field. If field is empty, issue the UPDATE DRIVE command and specify a value for the element=address parameter.

ANR85 25E Unable to allocate the device specified by unit value

Explanation

The z/OS media server cannot allocate the specified device during a ZOSMEDIA library request because the UNIT value in the device class that is associated with the volume mount request specifies a device address that is already allocated.

System action

The IBM Storage Protect server fails the operation.

User response

Verify that the MOUNTLIMIT parameter value in the device class is 1 if the UNIT value specifies a device address. Additionally, you can update the MOUNTRETENTION parameter value to 0. This will ensure that the mounted volume is dismounted after each use.

ANR85 26W The IBM tape device driver settings have been updated and need to be restarted. The device driver can be restarted by either restarting windows or reinstalling the IBM tape device driver.

Explanation

The IBM tape device driver settings have been changed to not automatically reserve the drive. By allowing IBM Storage Protect to manage the reservations this will eliminate some reservation warnings and potential mount failures. This is a one time change that requires the device driver to be re-initialized. Reinitializing the device driver can be accomplished by either restarting windows or reinstalling the IBM tape device driver. Restarting windows is simpler;

reinstalling the IBM tape device driver is less disruptive.

System action

Possible reservation conflicts between hosts.

User response

Restart windows or reinstall the IBM tape device driver to cause the IBM device driver to detect the registry change.

ANR85 27E The default cartridge access port (CAP) ID is invalid for library *library name*.

Explanation

The default CAP ID was specified in the CHECKOUT LIBVOLUME command. If the default CAP ID is specified, the CAP priority value must be set to a nonzero value.

System action

The system failed to eject the tape volumes.

User response

To verify the CAP priority value, issue the QUERY CAP command. If the priority value is 0, set the CAP priority to a nonzero value and reissue the CHECKOUT LIBVOLUME command.

ANR85 28E The slot element address *slot element address* is invalid for the library *library name* library.

Explanation

The slot element address is no longer valid. This issue might occur when a library is turned off or during a hardware malfunction. For a virtual library, this problem also might occur after the library is reconfigured or its firmware is updated.

System action

The slot in this library is unavailable.

User response

Ensure that the library is turned on and that no hardware problems are evident. To verify the slot element address, use the device driver tool or virtual library configuration tool.

ANR85 29E Command: Unable to open library *library name* by using an open system call.

Explanation

IBM Storage Protect cannot open the library.

System action

The transaction that requires this library fails.

User response

Inspect the library. Ensure that the library is turned on and ready. Ensure that the library is configured correctly for the host system.

ANR85 30W Volume *volume name* in drive *drive name* in library *library*

name is not labeled.

Explanation

The label is blank.

System action

This volume might be labeled automatically if the AUTOLABEL parameter is set to YES and the library supports automatic labeling.

User response

To label the volume manually, issue the LABEL LIBVOLUME command. Check the volume in by issuing the CHECKIN LIBVOLUME command.

ANR85 31W Deletion of FILE *volume volume name* from file system did not complete successfully.

Explanation

The server did not delete the file volume from the file system because the server cannot find the file volume. The file volume is no longer accessible through the server but it might continue to occupy space in the file system, if it still exists.

System action

The server continues operation, and the file volume is logically deleted within the server, but it is not deleted from the file system.

User response

ANR85 32I Volume *volume name* in storage pool *stgpool name* has been checked into library *library name* with media state *media state*.

Explanation

The specified storage pool volume is checked into the library with the displayed media state.

System action

System operation continues. The volume is added to the library's inventory and the media state is set.

User response

None.

ANR85 33W Append-only mode cannot be disabled for tape drive *Drive Name*.

Explanation

Append-only mode is designed to protect tape volumes that were accidentally loaded into a tape drive. Because of restrictions on the specified tape drive, you cannot disable append-only mode when a tape is in the drive. Currently, append-only mode is enabled and a tape is in the drive. An attempt was made to set the CHECKTAPEPOS option to NO or TSMONLY, but this setting is not valid.

System action

System operation continues, but the server does not disable append-only mode.

User response

In a shared library environment, the setting for the CHECKTAPEPOS option might be different for the library manager and the library client or storage agent. To help prevent issues, use the same setting for all. If you must use different settings, the preferred method is to specify YES or DRIVEONLY for the library client or storage agent and NO or TSMONLY for the library manager.

ANR85 34W The CHECKTAPEPOS option was not enabled because tape device driver driver name with tape device driver version current driver version is not compliant. To resolve the issue, install driver version supported driver version or later.

Explanation

The CHECKTAPEPOS option is not supported on this tape device driver version. To enable the CHECKTAPEPOS option on an IBM AIX operating system, the IBM tape device driver must be at Version 13.0.41.0 or later. After the tape device driver is updated to a

supported version, the server will automatically update the option setting to CHECKTAPEPOS=YES. This setting enables the server to validate the position of data blocks on tape.

System action

System operation continues.

User response

To enable the CHECKTAPEPOS option, install the newer driver version.

ANR85 35W No data found at the first data block of the volume volume name.

Explanation

The read operation reads data from the beginning of a non-empty private volume successfully, but the first data block does not contain data.

System action

The fetch data block operation is stopped.

User response

Check the tape to ensure that the correct tape is mounted, and then check the host system activity log to see whether there is any error that is related to the tape or the drive that is mounted. If the issue is still not resolved, report the issue to the vendor of the tape drive.

ANR85 50E Error opening filespec. (AIX)

Explanation

An error occurs while attempting an open operation.

System action

Server processing continues.

User response

- Refer to the other displayed messages to determine why the open operation has failed. Correct the problem and restart the process.
- If you have entered a file name ensure that the file name is correct and that it exists.

ANR85 50E Error opening file name. (Linux)

Explanation

An error occurs while the server attempts a file open operation.

System action

Server processing continues.

User response

- Refer to the other displayed messages to determine why the open operation has failed. Correct the problem and restart the process.
- If you have entered a file name ensure that the file name is correct and that it exists.

ANR85 50E Error opening filespec. (Windows)

Explanation

The server detects an error while attempting an open operation.

System action

Server processing continues.

User response

- Refer to the other displayed messages to determine why the open operation has failed. Correct the problem and restart the process.
- If you have entered a file name ensure that the file name is correct and that it exists.

ANR85 51E An error (error code) occurred during a write operation. (AIX)

Explanation

An error occurs while attempting a write operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the write operation failed; correct the problem and restart the process.

ANR85 51E An error (error code) occurred during a write operation. (Linux)

Explanation

An error occurs while the server attempts a write operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the write operation failed; correct the problem and restart the process.

ANR85 51E *An error (error code) occurred during a write operation.* (Windows)

Explanation

The server detects an error while attempting a write operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the write operation has failed. Correct the problem and restart the process.

ANR85 52E *An error (error code) occurred during a read operation.* (AIX)

Explanation

An error occurs while attempting a read operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the read operation failed; correct the problem and restart the process.

ANR85 52E *An error (error code) occurred during a read operation.* (Linux)

Explanation

An error occurs while the server attempts a read operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to determine why the read operation failed; correct the problem and restart the process.

ANR85 52E *An error (error code) occurred during a read operation.* (Windows)

Explanation

The server detects an error while attempting a read operation.

System action

Server processing continues.

User response

Refer to the other displayed messages to

determine why the read operation has failed. Correct the problem and restart the process.

ANR85 53E *Device type volume volume name cannot be overwritten by DUMPDB operation.* (AIX)

Explanation

The specified volume already exists or contains data, so that the server cannot allow new DUMPDB data to be written to it.

System action

The server has detected that the given volume already contains some data that would be overwritten by the requested DUMPDB operation.

User response

If the specified volume does not contain any valuable data, delete it and retry the DUMPDB operation.

ANR85 53E *Device type volume volume name cannot be overwritten by DUMPDB operation.* (Linux)

Explanation

The specified volume already exists or contains data, so that the server cannot allow new DUMPDB data to be written to it.

System action

The server has detected that the given volume

already contains data that would be overwritten by the requested DUMPDB operation.

User response

If the specified volume does not contain any valuable data, delete it and retry the DUMPDB operation, or specify a different volume name.

ANR85 53E *Device type volume volume name cannot be overwritten by DUMPDB operation.* (Windows)

Explanation

The specified volume already exists or contains data, so that the server cannot allow new DUMPDB data to be written to it.

System action

The server detects that the given volume already contains some data that would be overwritten by the requested DUMPDB operation.

User response

If the specified volume does not contain any valuable data, delete it and retry the DUMPDB operation.

ANR85 54W *Dump/load command: Device class device class name not defined. Devtype of FILE is assumed.* (AIX)

Explanation

The specified device class name is not defined with the DUMPLOADDB DEVCLASS option, to the server in the server options file or the server is not able to define the specified device class.

System action

Processing continues. The dump/load process assumes the device class is devtype=FILE and writes to or reads from a file.

User response

Refer to the other displayed messages to determine why the device class is not defined. Correct the problem and restart the command if you do not wish to write to or read from a file.

ANR85 54W (Linux) *Dump/load command: Device class device class name not defined. Devtype of FILE is assumed.*

Explanation

The specified device class name is not defined with the DUMPLOADDB DEVCLASS option, to the server in the server options file or the server is not able to define the specified device class.

System action

Processing continues. The dump/load process assumes the device class is devtype=FILE and

writes to or reads from a file.

User response

Refer to the other displayed messages to determine why the device class is not defined. Correct the problem and restart the command if you do not wish to write to or read from a file.

ANR85 55E (AIX) *Error error code (error string) occurred during a read operation from disk disk name.*

Explanation

An error occurred while attempting a read from disk.

System action

Server processing continues.

User response

Correct the problem and start the process again.

ANR85 55E (Linux) *An error (error code, error string) occurred during a read operation from disk disk name.*

Explanation

An error occurred while attempting a read from disk.

System action

Server processing continues.

User response

Correct the problem and restart the process.

ANR85 55E (Windows) *An error (error code) occurred during a read operation from disk disk name.*

Explanation

An error occurred while attempting a read from disk.

System action

Server processing continues.

User response

Correct the problem and restart the process.

ANR85 56E (AIX) *Error error code (error string) occurred during a write operation to disk disk name.*

Explanation

An error occurred while attempting a write to disk.

System action

Server processing continues.

User response

Correct the problem and restart the process.

ANR85 56E (Linux) *An error (error code, error string) occurred during a write operation to disk disk name.*

Explanation

An error occurred while attempting a write to disk.

System action

Server processing continues.

User response

Correct the problem and restart the process.

ANR85 56E (Windows) *An error (error code) occurred during a write operation to disk disk name.*

Explanation

An error occurred while attempting a write to disk.

System action

Server processing continues.

User response

Correct the problem and restart the process.

ANR85 57W (AIX) *Retrying failed I/O operation for disk disk name, error number number.*

Explanation

An error occurred while attempting an I/O operation on a disk volume. The request will be retried.

System action

The failed I/O operation is attempted again.

User response

Correct the problem being reported to avoid more errors in the future, or contact AIX support for assistance.

**ANR85 I/O vector
58E element bufP:
(AIX) buffer address,
len: buffer
length, offset:
file offset, errno:
errno.**

Explanation

This is a diagnostic message showing details of an AIO request which had an error. This message is normally preceded by ANR8555E or ANR8556E and offers additional information related to the I/O error.

System action

Server processing continues.

User response

Correct the problem and start the process again.

**ANR85 IBM Storage
77E Protect was not
(AIX) able to open the
SSL key-ring file
file name. The
GSKit return
code is return
code.**

Explanation

Initialization of the SSL environment failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that the correct SSL key-ring file (cert.kdb) is in the server instance directory and that the server has read/write

access to both cert.kdb and cert.sth. If the problem persists, delete the key-ring file and restart the server so that it can generate a new key-ring file.

**ANR85 IBM Storage
77E Protect was not
(Linux) able to open the
SSL key-ring file
file name. The
GSKit return
code is return
code.**

Explanation

Initialization of the SSL environment failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that the correct SSL key-ring file (cert.kdb) is in the server instance directory and that the server has read/write access to both cert.kdb and cert.sth. If the problem persists, delete the key-ring file and restart the server so that it can generate a new key-ring file.

**ANR85 IBM Storage
77E Protect was not
(Windo able to open the
ws) SSL key-ring file
file name. The
GSKit return
code is return
code.**

Explanation

Initialization of the SSL environment failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that the correct SSL key-ring file (cert.kdb) is in the server instance directory and that the server has read/write access to both cert.kdb and cert.sth. If the problem persists, delete the key-ring file and restart the server so that it can generate a new key-ring file.

**ANR85 The IBM Storage
78E Protect
(AIX) database does
not have a
password for
the SSL key-ring
file.**

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Delete the key-ring file so that IBM Storage Protect can generate a new one.

**ANR85 The IBM Storage
78E Protect
(Linux) database does
not have a
password for
the SSL key-ring
file.**

Explanation

Initialization of the SSL environment has failed.

Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Delete the key-ring file so that IBM Storage Protect can generate a new one.

**ANR85 The IBM Storage
78E Protect
(Windo database does
ws) not have a
password for
the SSL key-ring
file.**

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Delete the keyring file so that IBM Storage Protect can generate a new one.

**ANR85 The SSL key ring
79E file does not
(AIX) exist, but the
IBM Storage
Protect
database
contains a
password for it.**

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Restore a copy of the key ring file or use DELETE KEYRING so that IBM Storage Protect can generate a new keyring file and password.

ANR85 79E (Linux) The SSL key ring file does not exist, but the IBM Storage Protect database contains a password for it.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Restore a copy of the key ring file or use DELETE KEYRING so that IBM Storage Protect can generate a new keyring file and password.

ANR85 79E (Windows) The SSL key ring file does not exist, but the IBM Storage Protect database contains a password for it.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Restore a copy of the key ring file or use DELETE KEYRING so that IBM Storage Protect can generate a new keyring file and password.

ANR85 80E (AIX) An SSL write error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL write operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 80E (Linux) An SSL write error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL write operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 80E (Windows) An SSL write error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL write operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 81E (AIX) An SSL read error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL read operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 81E (Linux) An SSL read error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL read operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 81E (Windows) An SSL read error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL read operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 82E (AIX) An SSL open-socket error occurred on session session. The GSKit return code is gsk return code gsk string error.

Explanation

An error occurred during an SSL socket-open operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 82E (Linux) An SSL open-socket error occurred on

session session.
The GSKit
return code is
gsk return code
gsk string error.

Explanation

An error occurred during an SSL socket-open operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 82E (Windows) An SSL open-socket error occurred on session session. The GSKit return code is *gsk return code gsk string error.*

Explanation

An error occurred during an SSL socket-open operation.

System action

Server operation continues.

User response

Retry the operation.

ANR85 83E (AIX) An SSL socket-initialization error occurred on session session. The GSKit return code is *gsk return code gsk string error.*

Explanation

An error occurred during an SSL handshake process.

System action

Server operation continues.

User response

Verify that the client is properly configured for SSL and retry the operation.

ANR85 83E (Linux) An SSL socket-initialization error occurred on session session. The GSKit return code is *gsk return code gsk string error.*

Explanation

An error occurred during an SSL handshake process.

System action

Server operation continues.

User response

Verify that the client is properly configured for SSL and retry the operation.

ANR85 83E (Windows) An SSL socket-initialization error occurred on session session. The GSKit return code is *gsk return code gsk string error.*

Explanation

An error occurred during an SSL handshake process.

System action

Server operation continues.

User response

Verify that the client is properly configured for SSL and retry the operation.

ANR85 84I (AIX) The SSL TCP/IP Version 6 driver is ready for connection with clients on port *port number.*

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR85 84I (Linux) The SSL TCP/IP Version 6 driver is ready for connection with clients on port *port number.*

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR85 84I (Windows) The SSL TCP/IP Version 6 driver is ready for connection with clients on port *port number.*

Explanation

The server can now accept sessions with clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None

ANR85 85I (AIX) The SSL TCP/IP Version 6 driver is ready for connection with administrative clients on port *port number.*

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR85 85I (Linux) The SSL TCP/IP Version 6 driver is ready for connection with administrative clients on port *port number*.

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR85 85I (Windows) The SSL TCP/IP Version 6 driver is ready for connection with administrative clients on port *port number*.

Explanation

The server can now accept sessions with administrative clients using the SSL TCP/IP protocol on the indicated port number.

System action

Server operation continues.

User response

None.

ANR85 86E (AIX) The server was not able to create the key-ring file *file name*. The GSKit key-management

return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 86E (Linux) The server was not able to create the key-ring file *file name*. The GSKit key-management return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 86E (Windows) The server was not able to create the key-ring file *file name*. The GSKit key-management return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 87E (AIX) The server was not able to create the SSL self-signed certificate. The GSKit key management return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Check the GSKit return code and take appropriate action.

ANR85 87E (Linux) The server was not able to create the SSL self-signed certificate. The GSKit key management return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Check the GSKit return code and take appropriate action.

ANR85 87E (Windows) The server was not able to create the SSL self-signed certificate. The GSKit key management return code is *return code*.

Explanation

Initialization of the SSL environment has failed. Connections to SSL ports are not possible.

System action

Server operation continues.

User response

Check the GSKit return code and take appropriate action.

ANR85 88E (AIX) The server was not able to export to the SSL public certificate file *file name*. The GSKit key-management return code is *return code*.

Explanation

The certificate export file could not be generated for use by the IBM Storage Protect clients.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 88E (Linux) The server was not able to export to the SSL public certificate file *file name*. The GSKit key-management return code is *return code*.

Explanation

The certificate export file could not be generated for use by the IBM Storage Protect clients.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 88E (Windows) The server was not able to export to the SSL public certificate file *file name*. The GSKit key-management return code is *return code*.

Explanation

The certificate export file could not be generated for use by the IBM Storage Protect clients.

System action

Server operation continues.

User response

Verify that permissions to the server instance directory are correct.

ANR85 89E (AIX) The server was not able to initialize the GSKit key-management environment. The GSKit key-management return code is *return code*.

Explanation

The GSKit key-management subsystem could not be initialized.

System action

Server operation continues.

User response

Verify that permissions to execute the GSKit key management dynamic-link libraries are correct.

ANR85 89E (Linux) The server was not able to initialize the GSKit key-management environment. The GSKit key-management return code is *return code*.

Explanation

The GSKit key-management subsystem could not be initialized.

System action

Server operation continues.

User response

Verify that permissions to execute the GSKit key management dynamic-link libraries are correct.

ANR85 89E (Windows) The server was not able to initialize the GSKit key-management environment. The GSKit key-management return code is *return code*.

Explanation

The GSKit key-management subsystem could not be initialized.

System action

Server operation continues.

User response

Verify that permissions to execute the GSKit key management dynamic-link libraries are correct.

ANR85 90I (AIX) Session session connection is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

A secure connection was established using the

listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 90I (Linux) Session session connection is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

A secure connection was established using the listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 90I (Windows) Session session connection is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

A secure connection was established using the listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 91W (Linux) The storage area network (SAN) discovery function might fail to discover a tape drive with the current IBM tape device driver version: *current driver version*. A driver at version *supported driver version* or later is required to support the SAN discovery function.

Explanation

The SAN discovery function might fail to detect the SCSI location of the tape drive.

System action

System operation continues, but the tape drive might not be detected.

User response

If all tape devices in your storage environment are non-IBM tape devices, no action is required. If you are using IBM tape drives on a Linux operating system, install an IBM lin_tape device driver, Version 3.0.20 or later, which supports the SAN discovery function.

ANR85 91E (Windows) IBM GSKit version 8 must be installed on the system.

Explanation

The server requires IBM GSKit version 8.

System action

Server operation stops.

User response

To install IBM GSKit version 8, you must install the server and restart it.

ANR85 92I (AIX) Session session connection is using protocol *protocol*, cipher specification *cipher specification*, certificate *certificate*.

Explanation

A secure connection was established using the listed protocol, cipher specification, and certificate.

System action

Server operation continues.

User response

None.

ANR85 92I (Linux) Session session connection is using protocol *protocol*, cipher specification *cipher specification*, certificate *certificate*.

Explanation

A secure connection was established using the listed protocol, cipher specification and certificate.

System action

Server operation continues.

User response

None

ANR85 92I (Windows) Session session connection is using protocol *protocol*, cipher specification *cipher specification*, certificate *certificate*.

Explanation

A secure connection was established using the listed protocol, cipher specification, and certificate.

System action

Server operation continues.

User response

None.

ANR85 94I (AIX) Session to address *address* is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

An outbound secure connection is being established to the indicated address using the listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 94I (Linux) Session to address *address* is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

An outbound secure connection is being established to the indicated address using the listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 94I (Windows) Session to address *address* is using protocol *protocol*, cipher specification *cipher specification*.

Explanation

An outbound secure connection is being established to the indicated address using the listed protocol and cipher specification.

System action

Server operation continues.

User response

None

ANR85 95I (AIX) Session to address *address* is using protocol *protocol*, cipher specification *cipher specification*.

**certificate
certificate.**

Explanation

A secure connection is being established to the indicated address using the listed protocol, cipher specification, and certificate.

System action

Server operation continues.

User response

None.

**ANR85 Session to
95I address address
(Linux) is using protocol
protocol, cipher
specification
cipher
specification,
certificate
certificate.**

Explanation

A secure connection is being established to the indicated address using the listed protocol, cipher specification, and certificate.

System action

Server operation continues.

User response

None.

**ANR85 Session to
95I address address
(Windows) is using protocol
protocol, cipher
specification
cipher
specification,
certificate
certificate.**

Explanation

A secure connection is being established to the indicated address using the listed protocol, cipher specification, and certificate.

System action

Server operation continues.

User response

None.

**ANR85 The certificate
96E identity could
(AIX) not be verified
for the server at
address
address.**

Explanation

The server was unable to open an SSL connection to the server at the indicated address because the certificate identity could not be verified. Lack of verification happens when the certificate ownership information does not match the domain name or IP address.

System action

The session ends.

User response

Ensure that the server domain name or the IP address (the value of the HLADDRESS parameter of the DEFINE SERVER command) is correct. If you are using a self-signed certificate, ensure that it was created on a server at the same address as specified

in the DEFINE SERVER command.

**ANR85 The certificate
96E identity could
(Linux) not be verified
for the server at
address
address.**

Explanation

The server was unable to open an SSL connection to the server at the indicated address because the certificate identity could not be verified. Lack of verification happens when the certificate ownership information does not match the domain name or IP address.

System action

The session ends.

User response

Ensure that the server domain name or the IP address (the value of the HLADDRESS parameter of the DEFINE SERVER command) is correct. If you are using a self-signed certificate, ensure that it was created on a server at the same address as specified in the DEFINE SERVER command.

**ANR85 The certificate
96E identity could
(Windows) not be verified
for the server at
address
address.**

Explanation

The server was unable to open an SSL connection to the server at the indicated

address because the certificate identity could not be verified. Lack of verification happens when the certificate ownership information does not match the domain name or IP address.

System action

The session ends.

User response

Ensure that the server domain name or the IP address (the value of the HLADDRESS parameter of the DEFINE SERVER command) is correct. If you are using a self-signed certificate, ensure that it was created on a server at the same address as specified in the DEFINE SERVER command.

**ANR85 Certificate
97E information
(AIX) could not be
retrieved for a
connection to
the server at
address
address.**

Explanation

The server was unable to obtain certificate information for an SSL connection to the server at the indicated address.

System action

The session ends.

User response

Ensure that the certificate for the target server was imported to this server's key-ring file. If you are using a 3rd-party

certificate, you can test it with a session to the target server's SSL port with a browser such as Firefox.

ANR85 97E (Linux) Certificate information could not be retrieved for a connection to the server at address address.

Explanation

The server was unable to obtain certificate information for an SSL connection to the server at the indicated address.

System action

The session ends.

User response

Ensure that the certificate for the target server was imported to this server's key-ring file. If you are using a 3rd-party certificate, you can test it with a session to the target server's SSL port with a browser such as Firefox.

ANR85 97E (Windows) Certificate information could not be retrieved for a connection to the server at address address.

Explanation

The server was unable to obtain certificate information for an SSL connection to the server at the indicated address.

System action

The session ends.

User response

Ensure that the certificate for the target server was imported to this server's key-ring file. If you are using a 3rd-party certificate, you can test it with a session to the target server's SSL port with a browser such as Firefox.

ANR85 98I (AIX) Outbound SSL Services were loaded.

Explanation

The server is enabled to run SSL sessions from the server to other servers during node replication.

System action

Processing continues.

User response

None. The server can communicate via SSL to other servers. Prior to starting the server, certificates must be loaded in the server's keyring file (cert.kdb).

ANR85 98I (Linux) Outbound SSL Services were loaded.

Explanation

The server is enabled to run SSL sessions from the server to other servers during node replication.

System action

Processing continues.

User response

None. The server can communicate via SSL to other servers. Prior to starting the server, certificates must be loaded in the server's keyring file (cert.kdb).

ANR85 98I (Windows) Outbound SSL Services were loaded.

Explanation

The server is enabled to run SSL sessions from the server to other servers during node replication.

System action

Processing continues.

User response

None. The server can communicate via SSL to other servers. Prior to starting the server, certificates must be loaded in the server's keyring file (cert.kdb).

ANR85 99W (AIX) The connection with host address:host port failed due to an untrusted server certificate. An attempt to reconnect and establish certificate trust might follow.

Explanation

A server certificate that is used for the connection was not trusted by the partner. If this was the first time that a connection was made to the server from the host, an attempt to

establish certificate trust and reconnect will occur if the SESSIONSECURITY parameter is set to TRANSITIONAL.

System action

Processing continues.

User response

If the problem persists, add the certificate to the key database. For information about configuring SSL connections, see the instructions in IBM Knowledge Center.

ANR85 99W (Linux) The connection with host address:host port failed due to an untrusted server certificate. An attempt to reconnect and establish certificate trust might follow.

Explanation

A server certificate that is used for the connection was not trusted by the partner. If this was the first time that a connection was made to the server from the host, an attempt to establish certificate trust and reconnect will occur if the SESSIONSECURITY parameter is set to TRANSITIONAL.

System action

Processing continues.

User response

If the problem persists, add the

certificate to the key database. For information about configuring SSL connections, see the instructions in IBM Knowledge Center.

ANR85 99W (Windows) **The connection with host address:host port failed due to an untrusted server certificate. An attempt to reconnect and establish certificate trust might follow.**

Explanation
A server certificate that is used for the connection was not trusted by the partner. If this was the first time that a connection was made to the server from the host, an attempt to establish certificate trust and reconnect will occur if the SESSIONSECURITY parameter is set to TRANSITIONAL.

System action
Processing continues.

User response
If the problem persists, add the certificate to the key database. For information about configuring SSL connections, see the instructions in IBM Knowledge Center.

ANR86 00W (AIX) **An incoming TCP connection from host address:host port was detected on the SSL port.**

Connection refused
Explanation
An incoming TCP connection was detected on the SSL-only port. Connection refused.

System action
Processing continues.

User response
The remote host is attempting to connect to an SSL-only port, but SSL communication is not enabled on the remote host. Update the remote host to use the TCP port by using the TCPPORT option, or enable SSL on the remote host.

ANR86 00W (Linux) **An incoming TCP connection from host address:host port was detected on the SSL port. Connection refused**

Explanation
An incoming TCP connection was detected on the SSL-only port. Connection refused.

System action
Processing continues.

User response
The remote host is attempting to connect to an SSL-only port, but SSL communication is not enabled on the remote host. Update the remote host to use the TCP port by using the TCPPORT

option, or enable SSL on the remote host.

ANR86 00W (Windows) **An incoming TCP connection from host address:host port was detected on the SSL port. Connection refused**

Explanation
An incoming TCP connection was detected on the SSL-only port. Connection refused.

System action
Processing continues.

User response
The remote host is attempting to connect to an SSL-only port, but SSL communication is not enabled on the remote host. Update the remote host to use the TCP port by using the TCPPORT option, or enable SSL on the remote host.

ANR86 01E (AIX) **During the SSL handshake, the certificate exchanged between the server and remote host host address:host port was not validated.**

Explanation
The TLS 1.2 protocol is used for communication by default, and a SHA256 certificate is required to connect to the server. The server has specified an MD5 certificate as the default, so the

remote host cannot validate the certificate. The connection fails.

System action
Processing continues.

User response
To establish communication between the server and the remote host, update the server to use the SHA256 certificate as the default by issuing the following command:
gsk8capicmd_64 -cert -setdefault -db cert.kdb -stashed -label "TSM Server SelfSigned SHA Key"

ANR86 01E (Linux) **During the SSL handshake, the certificate exchanged between the server and remote host host address:host port was not validated.**

Explanation
The TLS 1.2 protocol is used for communication by default, and a SHA256 certificate is required to connect to the server. The server has specified an MD5 certificate as the default, so the remote host cannot validate the certificate. The connection fails.

System action
Processing continues.

User response
To establish communication between

the server and the remote host, update the server to use the SHA256 certificate as the default by issuing the following command: gsk8capicmd_64 -cert -setdefault -db cert.kdb -stashed -label "TSM Server SelfSigned SHA Key"

ANR86 01E (Windows) **During the SSL handshake, the certificate exchanged between the server and remote host address:host port was not validated.**

Explanation

The TLS 1.2 protocol is used for communication by default, and a SHA256 certificate is required to connect to the server. The server has specified an MD5 certificate as the default, so the remote host cannot validate the certificate. The connection fails.

System action

Processing continues.

User response

To establish communication between the server and the remote host, update the server to use the SHA256 certificate as the default by issuing the following command: gsk8capicmd_64 -cert -setdefault -db cert.kdb -stashed -label "TSM Server SelfSigned SHA Key"

ANR86 75E (AIX) **File name: File already exists for File or FileText Exit.**

Explanation

The specified file already exists and the file-exit option was set to PRESERVE.

System action

Server continues running.

User response

Specify a non-existent file.

ANR86 75E (Linux) **File name with environment variable DSMSEV_DIR: File already exists for File/ FileText Exit, overwrite option not set to YES.**

Explanation

The specified file already exists and the overwrite option was not set to Yes.

System action

Server continues running.

User response

Specify another file or set the overwrite option to YES in the server options file.

ANR86 75E (Windows) **File name with path within registry.: File already exists for File or FileText Exit.**

Explanation

The specified file already exists and the File/

FileText exit option was set to PRESERVE.

System action

Server continues running.

User response

Specify a non-existent file.

ANR86 77E (AIX) **User specified module: Cannot load into server, AIX system error number number.**

Explanation

The server was unable to load the module specified. The module is not a properly C-compiled and linked dynamic module.

System action

Server initialization stops or server continues running if already up.

User response

Use the server supplied sample makefile and export files to compile-link the user-exit module. Make sure the export.ref file contains the server-defined function name, and the module actually contains the server-defined function name, with one void parameter declared.

ANR86 77E (Linux) **User specified module, with environment variable DSMSEV_DIR: Cannot load into server, system errno = Error number**

generated by Solaris.

Explanation

The server was unable to load the module specified. The module is not a properly C-compiled and linked dynamic module.

System action

Server continues running.

User response

Use the supplied sample makefile, c , and h files to generate the user-exit module. Make sure the module contains product-defined function name adsmV3UserExit, and the module actually contains the product-defined function name, with one void * parameter declared, and returns void.

ANR86 77E (Windows) **User specified module, with path within registry: Cannot load into server, system errno = Error number generated by Windows.**

Explanation

The server was unable to load the module specified. The module is not a properly C-compiled and linked dynamic module.

System action

Server continues running.

User response

Use the server supplied sample makefile compile-link the user-exit module.

ANR86 78E (AIX) **Cannot bind User specified module into server. AIX system error number.**

Explanation

The server was unable to bind with the module specified.

System action

Server initialization stops or server continues running if already up.

User response

Use the server supplied sample makefile and export files to compile-link the user-exit module. Make sure the export.ref file contains the server-defined function name, and the module actually contains the server-defined function name, with 1 void parameter declared. The module may contain a global variable name that conflicts with the server's.

ANR86 78E (Linux) **Cannot bind User specified module, with environment variable DSMSEV_DIR into server, system errno = Error number generated by Solaris.**

Explanation

The server was unable to bind with the module specified. The server could not find a function named adsmV3UserExit in the module.

System action

Server continues running.

User response

Use the supplied sample makefile, c and header files to create the user exit module. Make sure the shared library module contains a function named adsmV3UserExit of type void, with one parameter of a void *.

ANR86 78E (Windows) **Cannot find/set User specified function name within DLL. in User specified DLL library name, with registry path, system errno = Error number generated by Windows.**

Explanation

The server was unable to find and/or bind with the function name in the DLL specified.

System action

Server continues running.

User response

Use the server supplied sample makefile to compile-link the user-exit module. Make sure there is a function name in the DLL as specified in the server options file. Make

sure the function only accepts one argument, a void pointer.

ANR86 79W (AIX) **A user-exit module is already loaded.**

Explanation

A user-exit module was loaded previously. Another user-exit module cannot be loaded.

System action

Server initialization stops or server continues running if already up.

User response

To load a new user-exit module, halt the server and then restart the server with the new user-exit module.

ANR86 79W (Linux) **Unable to unload user exit module: system errno = Error number generated by Solaris.**

Explanation

The server was not able to unload the user-exit module.

System action

Server continues running.

User response

The server should be stopped at the earliest possible time before the user exit is to be reactivated.

ANR86 79W (Windows) **There is already an user-exit loaded.**

Explanation

There was a previous successful load of an user-exit module, thus server cannot load another one.

System action

Server continues running.

User response

To load a new user-exit module, halt the server and then restart the server with the new user-exit module.

ANR86 80W (AIX) **A file used for the file or filetext exit is already opened.**

Explanation

A file for the file or filetext exit was previously opened. The server cannot open another one.

System action

Server initialization stops or server continues running if already up.

User response

To start a new file for the file or filetext exit, halt the server, then restart the server with the new file name.

ANR86 80W (Linux) **There is already a file used for the file or filetext exit.**

Explanation

There was a previous file open for the file or filetext exit. The server cannot open another one.

System action

Server initialization stops or server continues running if already up.

User response

To start a new file for the exit, halt the server, then restart the server with a new file name.

ANR86 80W There is already a file used for the file or filetext exit. (Windows)

Explanation

There was a previous file open for the file or filetext exit. The server cannot open another one.

System action

Server continues running.

User response

To start a new file for the exit, halt the server, then restart the server with a new file name.

ANR86 81I Connected to Tivoli event server at node name on port port. (AIX)

Explanation

The server successfully established a connection with the Tivoli event server on the specified node name and port.

System action

The server sends events to the Tivoli event server using this connection.

User response

None.

ANR86 81I Connected to Tivoli event server at node name on port port. (Linux)

Explanation

The server successfully established a connection with the Tivoli event server on the specified node name and port.

System action

The server sends events to the Tivoli event server using this connection.

User response

None.

ANR86 81I Connected to Tivoli event server at node name on port port. (Windows)

Explanation

The server successfully established a connection with the Tivoli event server on the specified node name and port.

System action

The server sends events to the Tivoli event server using this connection.

User response

None.

ANR86 82E Unable to determine port of Tivoli event server on node node name. (AIX)

Explanation

The server was unable to determine the TCP/IP port for the Tivoli event

server on node node name.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that TECPORT is specified in the server options file.

ANR86 82E Unable to determine port of Tivoli event server on node node name. (Linux)

Explanation

The server was unable to determine the TCP/IP port on which the Tivoli event server on node name is listening.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that TECPORT is specified in the server options file.

ANR86 82E Unable to determine port of Tivoli event server on node node name. (Windows)

Explanation

The server was unable to determine the TCP/IP port on which the Tivoli event server on node name is listening.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that TECPORT is specified in the server options file.

ANR86 83E Unable to connect to the Tivoli event server at node node name on port port. (AIX)

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server on node node name at port port.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that the value specified for TECPORT in

the server options file is correct.

ANR86 83E (Linux) Unable to connect to the Tivoli event server at node name on port port.

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server on *node name* at *port port*.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that the value specified for *TECPORT* in the server options file is correct.

ANR86 83E (Windows) Unable to connect to the Tivoli event server at node name on port port.

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server on *node name* at *port port*.

System action

Event logging to the Tivoli event server is disabled.

User response

Ensure that the Tivoli event server is running on the specified system. If the system on which the event server is running does not support the TCP/IP Portmapper, then ensure that the value specified for *TECPORT* in the server options file is correct.

ANR86 84E (AIX) Unable to connect to the Tivoli event server because TCP/IP is not available.

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server because TCP/IP services were not available.

System action

Event logging to the Tivoli event server is disabled.

User response

- Ensure that *COMMETHOD TCPIP* is specified in the server options file.
- If *COMMETHOD TCPIP* was specified, use the *BEGIN EVENTLOGGING TIVOLI* command to manually start event logging to the Tivoli event server once server initialization has completed.

ANR86 84E (Linux) Unable to connect to the Tivoli event server because TCP/IP is not available.

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server because TCP/IP services were not available.

System action

Event logging to the Tivoli event server is disabled.

User response

- Ensure that *COMMETHOD=TCPIP* is specified in the server options file, or that *COMMETHOD=NONE* is not specified.
- If *COMMETHOD=TCPIP* was specified, use the *BEGIN EVENTLOGGING TIVOLI* command to manually start event logging to the Tivoli event server once server initialization has completed.

ANR86 84E (Windows) Unable to connect to the Tivoli event server because TCP/IP is not available.

Explanation

The server was unable to establish a TCP/IP connection with the Tivoli event server because TCP/IP services were not available.

System action

Event logging to the Tivoli event server is disabled.

User response

- Ensure that *COMMETHOD=TCPIP*

is specified in the server options file, or that *COMMETHOD=NONE* is not specified.

- If *COMMETHOD=TCPIP* was specified, use the *BEGIN EVENTLOGGING TIVOLI* command to manually start event logging to the Tivoli event server once server initialization has completed.

ANR86 85I (AIX) Core dump being generated to file core dump file

Explanation

The server has started generating a coredump to the specified file as a result of a user request.

System action

Server operation continues.

User response

None.

ANR86 86I (AIX) Core dump successfully generated

Explanation

The server has successfully generated the requested core dump.

System action

Server operation continues.

User response

None.

ANR86 87E (AIX) Error generating core dump, errno system errno.

Explanation

The server was unable to generate the requested core dump. The errno indicates the reason AIX was unable to complete the request.

System action

Server operation continues.

User response

None.

ANR87 40W Number of automated library slots (*slots in use*) exceeds license terms (*slots licensed*).

Explanation

The number of slots in use within automated libraries exceeds the licensed value.

System action

The operation completes.

User response

Contact your service representative to update license values for slots in automated libraries, or reduce the number of slots in use by issuing CHECKOUT LIBVOLUME commands as necessary.

ANR87 41E CHECKIN LIBVOLUME not permitted with current license terms.

Explanation

The CHECKIN LIBVOLUME operation is not permitted because

the current license terms do not allow it.

System action

The command fails.

User response

Contact your service representative to update license values for slots in automated libraries, or reduce the number of slots in use by issuing CHECKOUT LIBVOLUME commands as necessary.

ANR87 42E This server is not licensed to support the device type. Device Support Module *module number* is required.

Explanation

A DEFINE DRIVE command or a volume mount operation cannot be processed because the server is not licensed to support the required device type.

System action

The operation fails.

User response

Contact your service representative to update the server license terms so that support for the required device type is enabled.

ANR87 43E This server is not licensed to support library device name. Device Support Module *module number* is required.

Explanation

Either a DEFINE LIBRARY command, a volume mount operation, or library initialization cannot be processed because the server is not licensed to support the given library.

System action

The operation fails.

User response

Contact your service representative to update the server license terms so that support for the given library device is enabled.

ANR87 44E Command: Current license terms do not permit this operation.

Explanation

The specified command failed because the current license terms do not permit it.

System action

The operation fails.

User response

Contact your service representative to update the server license terms so that the requested operation can be processed.

ANR87 45E Support for the 3590 device type is disabled for library *library name*.

Explanation

The requested operation fails because support for the 3590 device type is not currently enabled for the specified library.

System action

The operation fails.

User response

Make sure the ENABLE3590LIBRARY option is specified in the server options file, and that the scratch category number for 3590 volumes does not conflict with the private category or the CARTRIDGE volume scratch category.

ANR87 46E Device type *device type* is not supported in this release.

Explanation

The specified device type cannot be used by this release/platform of the server.

System action

The device cannot be used.

User response

Contact your sales or service representative to upgrade to the latest release of the server.

ANR87 47I Checking in volume *volume name* in library *library name*-CANCEL PENDING.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CHECKIN LIBVOLUME process on the server. The given volume was being checked in to the designated library, but the process was canceled by an administrator.

System action

The background process operation is in a wait queue. When the process comes off the queue, it will be terminated.

User response

None.

ANR87 48I Checking in volumes in search mode in library *library name*- CANCEL PENDING.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CHECKIN LIBVOLUME process on the server. Volumes were being checked into the given library in search mode, but the process was canceled by an administrator.

System action

The background process operation is being terminated.

User response

None.

ANR87 49E Library order sequence check

on library *library name*.

Explanation

An attempt has been made to mount or demount a volume, but the attempt fails for one of the following reasons:

- Mount is already in progress or a volume is already mounted.
- Mount is already pending.
- Demount is already pending.
- Demount was requested but no volume is mounted.

System action

The operation fails.

User response

This error usually occurs when a demount fails and a cartridge is left in the drive. All subsequent mounts fail while attempting to insert another cartridge into the same drive. Demount the cartridge using the library manager or perform an AUDIT LIBRARY operation on the designated library. Retry the operation.

ANR87 50E Volume is incompatible with specified device type in library *library name*.

Explanation

An attempt has been made to mount or check in a volume, but the attempt fails because the cartridge being mounted is not compatible with

the drive (For example, attempting to mount a 3590 cartridge on a 3490 drive).

System action

The operation fails.

User response

Ensure the DEVTYPE parameter on the CHECKIN command matches the device type of the drive. Retry the operation.

ANR87 51W This server is not licensed to support the device type device type. Managed Library license is required.

Explanation

This message is issued when a DEFINE DRIVE command or a volume mount operation uses a device class that is not licensed on the server.

System action

The operation fails if this is a try-and-buy server. For purchased servers, this message is to warn you that you are not in compliance with registered license terms.

User response

Contact your service representative to update the server license terms so that support for the required device type is enabled.

ANR87 52W This server is not licensed to support library device type.

Managed Library license is required.

Explanation

This message is issued when a DEFINE LIBRARY command or a volume mount operation uses a device class that is not licensed on the server.

System action

The operation fails if this is a try-and-buy server. For purchased servers, this message is to warn you that you are not in compliance with registered license terms.

User response

Contact your service representative to update the server license terms so that support for the required device type is enabled.

ANR87 53W This server is not licensed to support library library name. Library Sharing is required.

Explanation

This message is issued when a DEFINE LIBRARY command or library initialization for a library that requires library sharing and library sharing is not licensed on the server.

System action

The operation fails if this is a try-and-buy server. For purchased servers, this message is to warn you that you are

not in compliance with registered license terms.

User response

Contact your service representative to update the server license terms so that support for the required device type is enabled.

ANR87 Command:
54E **There is already a request to delete library library name.**

Explanation

The designated library cannot be deleted or updated because there is a request to delete the library already.

System action

The command is not processed.

User response

None.

ANR87 Command:
55E **There is already a request to update library library name.**

Explanation

The designated library cannot be deleted because there is a request to update the library already.

System action

The command is not processed.

User response

None.

ANR87 For optical libraries, you must specify CHECKLABEL=YES.

Explanation

Optical libraries require the CHECKLABEL parameter to be set to YES

System action

The command fails.

User response

Reissue the command and specify the CHECKLABEL=YES option.

ANR87 This server is not licensed to support library device type. Extended Edition license is required.

Explanation

This message is issued when a DEFINE LIBRARY command or a volume mount operation uses a device class that is not licensed on the server.

System action

The operation fails if this is a try-and-buy server. For purchased servers, this message is to warn you that you are not in compliance with registered license terms.

User response

Contact your service representative to update the server license terms so that support for the

required device type is enabled.

ANR87 The number of online drives in virtual tape library library name does not match the number of online drive paths for source source name. The number of online drives is online drive number and the number of online drive paths is online drive path.

Explanation

If the number of online drives in the library does not match the number of online paths to drives in the library for any applicable source, the server might choose a drive that lacks a valid path definition. The server then retries the mount operation, and any retry might adversely affect mount performance.

System action

Server operations continue. However, this message indicates that there might be a mount retry if the selected drive does not have a valid online path.

User response

To resolve the issue, complete the following steps: 1. Evaluate all drive path definitions. 2. For any drives that lack a path definition for any applicable source

(for example, storage agents), define drive paths. 3. Validate that all drive path definitions are online. 4. If a drive path is offline because of a hardware issue, resolve the hardware issue and update the path so that it is online. 5. If SAN-attached and NAS tape drives are configured in the same library, separate the tape drives into two libraries. Ensure that each library has only one type of attached tape drive.

ANR87 The drive name drive in the lib name library is owned by owner name.

Explanation

If a drive is owned by a library client or a storage agent, the library manager does not verify the drive access and readiness during the library manager initialization.

System action

None.

User response

In a shared library environment, the owner of a tape drive can change. If a tape drive is owned by a library client or storage agent, the library manager cannot access the tape drive. For example, if a library client or storage agent owns a tape drive, but the library manager halts or fails to respond, on startup, the library manager remembers the library client or storage

agent that owns the drive, and skips processing this drive. If the library client or storage agent is not synchronized with the library manager and has no record of owning the drive, this can result in an inability to use the drive. In this case, you might need to reset the drive reservation from the host machine of the library client or storage agent.

**ANR87 Cancel in
60I progress.**

Explanation

The MOVE MEDIA command has been canceled and will end when resources have been freed for the background process. This message may be displayed in response to a QUERY PROCESS command for a MOVE MEDIA command.

System action

Server operation continues.

User response

None.

**ANR87 Number of
61I volumes
processed:
number**

Explanation

The MOVE MEDIA command has processed the number of volumes displayed. This message may be displayed in response to a QUERY PROCESS command for a MOVE MEDIA command.

System action

Server operation continues.

User response

None.

**ANR87 The drive drive
62E name in the
library library
name was
unable to obtain
an encryption
key from the
encryption key
management.**

Explanation

The encryption key manager did not respond to the drive or library that is managed by the IBM Storage Protect server. Since IBM Storage Protect is not managing the encryption keys, there is an issue with the encryption key manager, the drive, or the library.

System action

The operation fails.

User response

This is most likely a problem with the encryption key manager (for example, a timeout or communication failure between the encryption key manager and the drive or library). Correct any issues with the encryption key manager and try the operation again. If the problem persists, contact IBM hardware support.

**ANR87 Command:
63E Volume volume
name not
processed:
library library**

**name not
defined.**

**required within
time limit
minutes.**

Explanation

The indicated volume is not processed since the designated library has not been defined or has been deleted.

System action

The volume is not processed.

User response

Reissue the command using a different library name, or define the library before retrying the command.

**ANR87 Command:
64E Volume volume
name not
processed: the
operation is not
allowed for
library type
library type.**

Explanation

The indicated volume is not processed since the requested operation is not allowed for libraries of the given type.

System action

The volume is not processed.

User response

None.

**ANR87 Request number:
65I device type
volume volume
name in location
location name is
required for use
in library library
name; CHECKIN
LIBVOLUME**

Explanation

A mount request has been made for a volume that is defined in a storage pool, but which is currently checked out of the given library and stored in the location shown.

System action

The server waits until it detects that the volume has been checked into the library, or the time limit expires.

User response

Obtain the required volume from the indicated location, and insert it into the library by issuing a CHECKIN LIBVOLUME command. Use the SWAP=YES option of the CHECKIN LIBVOLUME command if the library is currently full; this process allows the server to select an appropriate volume to be swapped out in order to make room for the required volume.

**ANR87 MOVE MEDIA
66I command:
CHECKOUT
LIBVOLUME
command for
volume volume
name in library
library name
completed
successfully;
Place the
ejected volume
in location
location name.**

Explanation

The CHECKOUT LIBVOLUME operation has completed successfully for the indicated volume in the given library. Place the ejected volume in the indicated location.

System action

The volume is either deleted from the library inventory (if its status is something other than DATA) or marked not present (if its status is DATA).

User response

If an *UNKNOWN* location is displayed, issue UPDATE STGPOOL OVFLLOCATION command to define an overflow location name to be used on the subsequent MOVE MEDIA command. For the volumes ejected with an *UNKNOWN* location, use UPDATE VOLUME LOCATION command to update its location to your overflow location name.

ANR87 67I Number of volumes processed: *number volumes processed.* Volumes sent to library *library name* for checkout: *number volumes sent.*

Explanation

The MOVE MEDIA command has processed the number of volumes shown. Currently, the MOVE MEDIA command has sent for processing

the number of volumes shown to the library shown. This message may be displayed in response to a QUERY PROCESS command for a MOVE MEDIA command.

System action

Server operation continues.

User response

None.

ANR87 68E File *file name* on volume *drive name* could not be found.

Explanation

The server was unable to find the specified file name on the indicated volume. For removable file device classes, each volume maintains data using a file name which is the same as the volume name and the label value on the volume.

System action

The volume is rejected.

User response

Ensure that the proper volume has been placed into the drive. If you are creating a removable file device class volume by copying data from a FILE device class volume, the media must have a label which is the same as the volume name. The file which is copied to the volume must be renamed to have the same name as the label.

ANR87 69E External media management function request

type returned
result=result.

Explanation

A request of the indicated function type was sent to the external library manager program, which returned a result code which was not SUCCESS.

System action

The server continues, but the server operation that was being attempted fails.

User response

Consult the documentation for the external media management program to determine how to recover from the error condition. Then attempt the server operation again.

ANR87 70W Unable to load external library manager *filespec.*

Explanation

A library of LIBTYPE=EXTERNAL is defined but the server cannot load the external library manager.

System action

The server continues, but the external library cannot be accessed.

User response

Verify that the EXTERNALMANAGER parameter for the external library is specified correctly on the DEFINE LIBRARY

or UPDATE LIBRARY command.

ANR87 71E Volume *volume name* in library *library name* is deleted. External Library is not synchronized with the server. Audit required.

Explanation

The server deleted a volume from its inventory, and its attempt to inform the external library manager has failed.

System action

The server may continue to access the library, but some volumes may not be accessible until the external library is synchronized with the server.

User response

Perform the appropriate type of processing on the external library in order to synchronize it with the server.

ANR87 72I Moving volume *volume name* (if known) from drive *drive name* to slot *slot element number* in library *library name*.

Explanation

A volume found in the drive during library initialization is being moved to the slot.

System action

The volume is moved from the drive to the slot.

User response

None.

ANR87 73E Incompatible options
CHECKLABEL=NO and SEARCH=YES for library type library.

Explanation

If a barcode reader is not installed and detected by the server, the server requires the ability to check the tape label when searching for new volumes in a VTL or SCSI tape library. The CHECKLABEL=NO and SEARCH=YES parameters on the CHECKIN LIBVOL command are not compatible.

System action

The command fails.

User response

Reissue the CHECKIN LIBVOL command and specify CHECKLABEL=YES.

ANR87 74W Volume volume name not checked into library library name but is using category category number.

Explanation

While processing a DEFINE LIBRARY or AUDIT LIBRARY command for the given library, the server found a volume that was not checked into the library (with the CHECKIN LIBVOL command), but is

assigned to one of the categories in use by that library.

System action

If the volume category equals the value of the library SCRATCHCAT the category is changed to the value of the library PRIVATECAT. This is to prevent the library from loading the volume when a scratch volume is requested.

User response

If the volume is to be used by the server, it does not have to be reassigned but it must be checked into the library with the CHECKIN LIBVOL command. If the volume is not to be used by the server, use the mtlb program to reassign the volume to its correct category. For details about the mtlb program, refer to the documentation provided with the library device.

ANR87 75I Drive drive name unavailable at library manager.

Explanation

The specified drive availability status at the library manager has changed from available to unavailable.

System action

The drive status on the server is updated to reflect the availability to that of the library manager. The drive will not be considered as a

candidate for the mount or demount request.

User response

Contact your service representative to determine the cause of the drive becoming unavailable. Once the service representative has determined the cause and changed the availability status to available at the library manager, the server will resume use of the drive.

ANR87 76W Volume volume name in drive drive name contains lost VCR data; performance may be degraded.

Explanation

The Vital Cartridge Records of the cartridge in the drive are lost or corrupted. This results in the inability of the drive to do fast locates to file positions on the cartridge, which causes the locate performance for read or append operations to become degraded.

System action

The server continues the operation.

User response

There are two methods to restore the VCR data. The first method uses the MOVE DATA command to move the data off the tape and to return the tape to scratch or empty status. The VCR data is rebuilt when the empty tape is rewritten from the

beginning-of-tape. The second method rebuilds the VCR by loading the tape and locating directly to the end-of-data. This is done by the server in normal use when new data is appended to the end of the tape. It can also be done independent of the server by loading the tape in an unused drive and using the tapeutil program. Select the tapeutil option "Space to End-of-Data".

ANR87 77E Mount for volume volume name failed; media performance is degraded.

Explanation

The VCR data on the volume is lost or corrupted, resulting in degraded tape positioning. The mount fails because the tape drive was configured to fail mounts that indicate this condition.

System action

The client command fails and the transaction is rolled back.

User response

Until the VCR data can be restored, the user can issue the UPDATE VOLUME command to make the volume unavailable. There are two methods to restore the VCR data. The first method uses the MOVE DATA command to move the data off the tape and to return the tape to scratch or empty status. The VCR data is rebuilt

when the empty tape is rewritten from the beginning-of-tape. The second method rebuilds the VCR by loading the tape and locating directly to the end-of-data. This is done by the server in normal use whenever data is appended to the end of the tape. It can also be done independent of the server by loading the tape in an unused drive and using the tapeutil program. Select the tapeutil option "Space to End-of-Data".

ANR87 78W Scratch volume volume name changed to Private Status to prevent re-access.

Explanation

The scratch volume encountered an error during mount processing that makes it unusable. The status of the volume is changed to private so that it is not selected for future scratch mounts. (Although the status has become private, it is not defined to a storage pool.)

System action

Processing continues with another scratch volume.

User response

See previous error messages to determine the cause of the mount failure, and correct the problem. If the problem is a mislabeled volume or unreadable label, relabel the scratch volume using the dsmlabel utility with the "-overwrite" option.

If the volume is missing from its home slot, issue the AUDIT LIBRARY command against the library. If the volume has lost or corrupted VCR-data, relabel the volume. (This reinitializes the VCR-data by writing to the volume from beginning-of-tape.) Once the problem is corrected, update the status of the volume to scratch by using the UPDATE LIBVOL command.

ANR87 79E Unable to open drive drive name, error number= errno value from open system call.

Explanation

The drive cannot be opened by the server. On UNIX and Linux systems, an error number is a value of an errno returned by the operating system. On Windows, an error number is a Windows error message number.

System action

The transaction that needs the drive fails.

User response

Use the error number in conjunction with operating system documentation to narrow the scope of the cause. Inspect the drive. Ensure that the drive is powered on and ready, that the cables are properly connected and terminated, and that the device is properly configured to the operating system.

ANR87 80E Volume in drive drive name has no label.

Explanation

The volume in the indicated drive does not have a label. The server requires that all media be uniquely labeled.

System action

The volume is rejected and the server prompts for a new volume.

User response

Use the appropriate labeling utility to label the media. In Windows NT, the LABEL command is used to label removable disk cartridges, diskettes and other media which appear as drive letters.

ANR87 81E Volume in drive drive name has invalid label label.

Explanation

The volume in the indicated drive has the label shown. The name does not conform with server requirements. The server requires that all media be uniquely labeled and, for removable media, that the label with file naming conventions. The label found exceeded the maximum label size for removable media or did not conform to server labeling requirements. If ????? is shown for the label, it indicates that server was unable to read the label.

System action

The volume is rejected.

User response

Use the appropriate labeling utility to label the media. In Windows NT, the LABEL command is used to label removable disk cartridges, diskettes and other media which appear as drive letters. This label must still conform to server requirements.

ANR87 82E Volume volume name could not be accessed by library library name.

Explanation

The designated volume is in the inventory of the Library Manager, but the physical location is either inaccessible or unknown.

System action

The operation fails. The access mode of the volume is changed to UNAVAILABLE.

User response

Ensure that the cartridge is physically in the library, and reinventory the library. If the volume location is resolved, restore the access mode of the volume to its previous value using the UPDATE VOLUME command.

ANR87 83E Label on volume in drive drive name could not be read.

Explanation

The server was unable to read the label on the indicated drive.

System action

The volume is rejected.

User response

Use the appropriate labeling utility to label the media. In Windows NT, the LABEL command is used to label removable disk cartridges, diskettes and other media which appear as drive letters. This label must still conform to server requirements.

ANR87 84E File file name on volume drive name could not be created.

Explanation

The server was unable to create the indicated file on the indicated volume. The server creates a file on removable media in which to store data.

System action

The volume is rejected.

User response

Ensure that the media is not defective, and is properly formatted. Ensure that there are not large numbers of files already in the root of the file system. Some file systems have limits on the number of files that may be created in the root directory.

ANR87 85E Out-of-space in file system for device type

volume volume name.

Explanation

The server detected an out-of-space condition for the file system in which the given volume resides.

System action

The operation fails.

User response

The file system must be expanded to accommodate volume growth.

ANR87 86I Request number: Remove device type volume from entry/exit port; insert volume volume name mount mode into entry/exit port of library library name within time limit minute(s); issue 'REPLY' along with the request ID when ready.

Explanation

A CHECKIN LIBVOLUME command is in progress, and the specified volume is needed. However, there is a volume awaiting to be removed from the entry/exit port before the specified volume is inserted into the port of the given library.

System action

The server waits until a REPLY command is issued.

User response

Remove the volume from the library and insert the correct volume into the entry/exit port. Issue a REPLY command, along with the request ID, to tell the server that the volume has been removed and a new volume has been inserted.

ANR87 87W Unable to read the barcode label(s) in library library name.

Explanation

A command is issued with the CHECKLABEL=BARCODE option. The library is unable to detect that the cartridges have valid barcode labels. The barcode reader is disabled or it is unable to read the labels.

System action

Unless the command is checking in cleaning cartridges, the process continues by loading the cartridges into the library's drives and reading the label from the tape. Cleaning cartridges have no internal label that can be checked by loading it in the drive.

User response

Cancel the process if you do not want to load all of the cartridges into the library's drives. Examine the cartridges to ensure they have barcode labels and they are compatible with the barcode reader. Not all vendors' labels are

readable by all libraries. Check that the barcode reader is configured and functioning properly, if necessary.

ANR87 88W Unable to read the barcode of cartridge in slot-id Element number of slot in library library name; loading in drive to read label.

Explanation

The library barcode reader is unable to read the label of a tape cartridge. The cartridge is found in the slot with the given element number.

System action

The cartridge is loaded into a drive and its label will be read from the tape.

User response

Cancel the process if you do not want to load any cartridges into the library's drives. Examine the cartridge to ensure it has a barcode label and that it is compatible with the barcode reader. Not all vendors' labels are readable by all libraries. Check that the barcode reader is configured and is functioning properly, if necessary.

ANR87 89W Dynamic drive recovery being attempted on device type volume volume name due to errors.

Explanation

Due to a drive or media fault, the server is moving the volume to a new drive.

System action

Read or write operations resume on the volume once it is remounted.

User response

None.

ANR87 90I *device type volume volume name re-mounted in drive drive name.*

Explanation

Due to a drive or media fault, the server has moved the volume to the specified drive. Read or write operations resume on the volume.

System action

The label of the volume has been verified.

User response

None.

ANR87 91E *Unable to move device type volume volume name to another drive.*

Explanation

Dynamic drive recovery was being attempted on the volume, but was unable to move the volume to another drive.

System action

The originating process terminates.

User response

See previous error messages to determine the cause of the DDR failure, and correct the problem. If the problem is an unreadable label, any data on the volume may be lost.

ANR87 92E *Unrecoverable drive failures on drive drive name; drive is now marked offline.*

Explanation

The drive has been determined to be faulty because of recurrent failures.

System action

The drive is now marked offline.

User response

Service the drive for failures. Delete and redefine the drive to bring it back online.

ANR87 93E *Dynamic drive recovery failed for device type volume volume name because not enough drives are available.*

Explanation

To recover a volume on another drive, there must be at least one other drive available that is not associated with the transaction which is

driving the recovery. In addition, the maximum number of drives that can have dynamic drive recovery performed at the same time is one less than the number of drives. This is to prevent deadlock from occurring between two recovering transactions. One of these criteria has failed.

System action

No DDR is performed and the transaction fails.

User response

Restart the transaction.

ANR87 94E *Retry of operation name operation failed for device type volume volume name.*

Explanation

After successfully mounting the volume on another drive, due to an I/O error, the original operation fails when retried.

System action

No further recovery is performed and the transaction fails.

User response

Restart the transaction.

ANR87 95I *Retry of operation name operation for device type volume volume name is successful.*

Explanation

After mounting the volume on another drive, due to an I/O error, the operation is tried successfully.

System action

The transaction continues from the point of interruption from the failure.

User response

None.

ANR87 96W *Drive drive name of library library name is not online; UPDATE DRIVE required.*

Explanation

During the initialization of a library, the server finds that the drive was updated to be offline.

System action

The drive will not be accessible by the library during tape operations.

User response

The drive may be made online by issuing the UPDATE DRIVE command with the ONLINE=YES option.

ANR87 97W *command: Drive drive name of library library name is inaccessible.*

Explanation

The server is unable to use the mentioned drive. This may be for the following reasons:

- The drive cannot be opened.
- In the case of a 3494 or a library that can be partitioned, the drive may be unavailable to the library manager, may be in use by another application, or may be loaded with a cartridge not labeled for server use.

System action

The drive is temporarily made offline and is not used for tape operations. The server polls the drive at one-half minute intervals to check if the condition has cleared. Once the drives is accessible again, the drive is brought online.

User response

Determine the reason the drive is inaccessible, such as hardware errors reported in the system logs. Render any needed corrections to the drive. The drive will be brought online automatically when the polling process detects that it has become accessible.

ANR87 Drive drive 98W *name in library library name is busy; some transactions may fail.*

Explanation

The drive being made offline is currently mounted with an open tape volume. If the transaction using the volume requires subsequent tape mounts and is unable to acquire a

drive, the transaction will fail.

System action

If this tape volume is one of a sequence of volumes that are required to process a transaction, a drive must be available for each mount. This may be any drive in the library, but if all other library drives are currently busy and are still busy at the time the new tape must be mounted, the transaction will fail.

User response

If possible, make the drive online until the transaction using it ends. If there is an idle volume on the drive, dismount the volume first.

ANR87 Command: 99I *Operation for library library name started as process process ID.*

Explanation

A LABEL process has been started to write the label on the specified volume in the given library. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response to the LABEL command entered by an administrator.

User response

To obtain status on the process, issue

the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR88 LABEL 00I *LIBVOLUME for volume volume name in library library name completed successfully.*

Explanation

The background process to LABEL a volume has completed.

System action

The volume's label has been rewritten.

User response

None.

ANR88 The LABEL 01I *LIBVOLUME process, process Id, for library library name is completed. The number of volumes that labeled is count of labeled volumes. The number of volumes that were checked in is count of checked in volumes.*

Explanation

A search-mode process to LABEL volumes has completed.

System action

The volumes have been labeled.

User response

None.

ANR88 LABEL 02E *LIBVOLUME process, process Id, for library library name failed.*

Explanation

The Labeling process ended unsuccessfully.

System action

Server operation continues.

User response

Complete the following steps: 1. To determine the cause of the failure, review the previous error messages. 2. Based on the previous messages, correct the problem.

ANR88 LABEL VOLUME 03I *process process Id for library library name has been canceled; count of labeled volumes volume(s) labeled, count of checked in volumes volume(s) checked-in.*

Explanation

A background server process that has been working to label the volumes for the given library is canceled by the CANCEL PROCESS command. The counts provided are for any volumes processed prior to the cancel.

System action

The server process is ended and server operation continues.

User response

None.

ANR88 04I Labeling volume *volume name* in library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a LABEL process on the server.

System action

The background process continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR88 05I Labeling volumes in library *library name*; volume *count* volume(s) labeled.

Explanation

In response to a QUERY PROCESS command, this message displays the status of a LABEL process with the SEARCH option.

System action

The background process continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR88 06E Could not write volume label *volume name* on the tape in library *library name*.

Explanation

The Label process could not write the label on the tape specified.

System action

For a LABEL operation with SEARCH=YES, the background process continues to the next volume. For an individual volume, the process ends. The volume is not labeled and is not checked into the library.

User response

Make sure the library and drive devices associated with this command are powered on and ready, and then reissue the command.

ANR88 07W Could not write label *volume name* on the volume in drive *drive name* of library *library name* because volume is already labeled existing volume *name*.

Explanation

The check in or label process could not write the label on the tape

specified because the volume is already labeled.

System action

The check in process will not overwrite volumes that are already labeled, and the label process will only overwrite volumes when OVERWRITE=YES is specified. The volume is not labeled and cannot be checked in to the library. If SEARCH=YES, the process continues to the next volume. For an individual volume, the process ends.

User response

Reissue the command with the correct parameters.

ANR88 08E Could not write label *label name* on the volume in drive *drive name* of library *library name* because that volume is already labeled with volume *name* which is still defined in a storage pool or volume history.

Explanation

An attempt was made to overwrite the label of a volume that is still defined to a storage pool or is still found in the volume history file. Such a volume may still contain valid data.

System action

The server process is ended and server operation continues.

User response

It is usually not necessary to re-label volumes. If the volume must be relabeled, that volume must first be removed from the storage pool or volume history file where it is defined.

ANR88 09I Request number: Please provide the label name for the volume in slot element *slot element number* of library *library name* by issuing REPLY n LABEL=xxx within time limit minutes, where n is the request ID and xxx is the desired label name.

Explanation

A LABEL LIBVOLUME command is in progress, and the name of the next volume is needed.

System action

The server waits until a REPLY command is issued.

User response

Issue a REPLY command, along with the request ID, and the volume name for the next cartridge.

ANR88 10I Volume *volume name* has been labeled in library *library name*.

Explanation

The Label process with the search option has

found and labeled a volume.

System action

The process ends.

User response

None.

ANR88 11E *Command: The LABELSOURCE parameter is required when using SEARCH with this command.*

Explanation

The LABELSOURCE parameter must be provided with the given command.

System action

The command is not processed.

User response

Reissue the command, and provide a valid LABELSOURCE parameter value.

ANR88 12E *Command: The SEARCH parameter is required when using LABELSOURCE with this command.*

Explanation

When using the LABELSOURCE option with this command, the SEARCH parameter must be also provided.

System action

The command is not processed.

User response

Reissue the command, and provide a valid SEARCH parameter value.

ANR88 13W *Unable to read the barcode of cartridge in slot element
Element number of slot in library library name.*

Explanation

The library barcode reader is unable to read the label of a tape cartridge. The cartridge is found in the slot with the given element number.

System action

When LABELSOURCE=BARCODE is specified on the LABEL LIBVOLUME command, volumes without a barcode cannot be labeled. When the VOLRANGE or VOLLIST option is specified on the CHECKIN LIBVOLUME command, volumes without a barcode cannot be checked in.

User response

Examine the cartridge to ensure it has a barcode label and that it is compatible with the barcode reader. Not all vendors' labels are readable by all libraries. Check that the barcode reader is configured and is functioning properly, if necessary.

ANR88 14I *Remove volume Volume name from slot element Slot element number*

of library *Library name.*

Explanation

LABEL LIBVOLUME has ended for the specified volume and that volume must be removed from the library because either it was not checked in or there was an error.

System action

The server continues normal operation.

User response

Remove the specified volume from the library.

ANR88 15I *Remove volume Volume name from port element Port element number of library Library name.*

Explanation

LABEL LIBVOLUME has ended for the specified volume and that volume must be removed from the library because either it was not checked in or there was an error.

System action

The server continues normal operation.

User response

Remove the specified volume from the library.

ANR88 16E *command: Volume Volume name in library Library name cannot be labeled because it is currently defined in a*

storage pool or in the volume history file.

Explanation

During command *command* processing, a volume cannot be used because there is a storage pool volume defined or a volume in the volume history file with this volume name. Such a volume may still contain valid data. Applying the volume name to the cartridge can overwrite data and or cause library inventory corruption. If the volume is in the volume history file, it has been previously used by for an export, database dump, database backup operation, or by a library client (as recorded in the volume history).

System action

If the SEARCH=YES option was specified, the current volume is skipped and command processing continues with the next volume found. If SEARCH=NO was specified, command processing terminates.

User response

If the volume is present in an automated library, it should either be removed or checked into the library's inventory in the PRIVATE category.

ANR88 17E *Name length for volume "Volume name" invalid; max is Maximum name length.*

Explanation

During LABEL LIBVOL processing, the volume name provided to be written on the label exceeds the maximum length for the type of cartridge.

System action

The label process fails for that cartridge.

User response

Reissue the LABEL LIBVOL command and provide a volume name that is not longer than the maximum listed.

ANR88 18E I/O Error on library *library name*; request for op. *operation/function* to the 3494 Library Manager has timed out.

Explanation

A command for the operation was issued to the Library Manager and a response was not received within the maximum timeout period.

System action

The operation and the transaction fails.

User response

Verify that communications with the library is operational, that it is online and ready for commands. Increase the time-out limit of the Library Manager Control Point device driver. If the problem persists,

provide your service representative with the 3494 Library Manager transaction logs.

ANR88 19E Unable to read the barcode label(s) in library *library name*.

Explanation

A LABEL command was issued with the LABELSOURCE=BARCODE option. The library was unable to detect that the cartridges had valid barcode labels or the library did not have a barcode reader. If a barcode reader is present the reader might be disabled or it is unable to read the labels.

System action

Examine the cartridges to ensure they have barcode labels and they are compatible with the barcode reader. Not all vendors' labels are readable by all libraries. Check that the barcode reader is configured and functioning properly.

User response

None.

ANR88 20W Repairing VCR data for Volume *volume name* in drive *drive name*; dismount may be delayed.

Explanation

The Vital Cartridge Records of the cartridge in the drive are lost or corrupted, which results in the inability of the drive to do fast locates

to file positions on the cartridge. The VCR is being rebuilt during the volume dismount process in order to avoid performance degradation on future mounts of the volume.

System action

The server continues the dismount operation. There may be a long delay because the VCR is rebuilt by spacing the tape forward to the end-of-data.

User response

None.

ANR88 21E Barcode of element *slot element address, 'hardware barcode string'*, exceeds *maximum length* characters in length.

Explanation

A barcode is encountered that was longer than a valid volume name.

System action

The barcode is not considered valid and will not be used for the server process.

User response

Replace the cartridge's barcode with one that is supported by the library and whose number of characters does not exceed the maximum length.

ANR88 22E '*Volume name*' is not a valid volume name.

Explanation

The specified string is not a valid volume name.

System action

The program prompts for a new volume name.

User response

Enter a volume name that is within the length constraints for the media type being labeled, and which contains only alphanumeric characters.

ANR88 23E Hardware configuration error in library *library name*: *number of drives drives, number of storage slots storage slots*.

Explanation

The library device returned a count of zero for either the drives or the slots. The drives may have not yet been configured to the operating system, or to the library. The library must have at least one drive and multiple slots when properly configured in order to be defined to the server.

System action

The operation fails.

User response

Configure the drives to the operating system, and reinitialize the library.

**ANR88 I/O Error on
24E library *library
name*; request
request id for
operation
operation/
function to the
3494 Library
Manager been
lost.**

Explanation

A command for the operation was issued to the Library Manager and a response was not received within the maximum timeout period.

System action

The operation and the transaction fails.

User response

Verify that communications with the library is operational, that it is online and ready for commands. If the problem persists, provide your service representative with the 3494 Library Manager transaction logs and the request id from the failed operation.

**ANR88 'Volume range' is
25E not a valid
volume range.**

Explanation

The specified string is not a valid volume range.

System action

The program prompts for a new volume range.

User response

Enter the volume names in the range that

is within the length constraints for the media type being labeled, and which contains only alphanumeric characters. The volume names of the beginning and ending volume must be the same in length and the incrementals must be in digits. The mixed generation tape volumes can not be in the range. Only the same generation tape volumes can be in the same range.

**ANR88 No Entry/Exit
26E found on library
library name.**

Explanation

A CHECKIN LIBVOLUME SEARCH=BULK command was issued on a library that has no Entry/Exit ports.

System action

None.

User response

None.

**ANR88 No Entry/Exit
27E port is available
on library *library
name*.**

Explanation

A CHECKOUT LIBVOL command was issued on a library where all its Entry/Exit Ports were found to be full or inaccessible.

System action

None.

User response

Empty all the entry/exit ports on the library, close

the entry/exit port door, make sure the ports are accessible, and try the command again.

**ANR88 Slot element
28E number of
library *library
name* is
inaccessible.**

Explanation

The slot in the library could not be physically accessed at this time.

System action

None.

User response

Verify that the Entry/Exit door is closed and the device has not logged any device errors before trying the command again.

**ANR88 Remove volume
29I volume name
from slot
element number
of library *library
name* at your
convenience.**

Explanation

A volume has been checked out from the library and placed in a multiple entry/exit port library. The volume needs to be removed from the library, but the operation is not critical.

System action

None.

User response

Remove the volume from the entry/exit slot.

**ANR88 Internal Device
30E type drive
diagnostics
detect excessive
media failures
for volume
Volume name
(MIM MIM
Code). Access
mode is now set
to "read-only".**

Explanation

The tape drive's microcode performed an analysis of the media during the prior mount of the volume and determined that the number of temporary errors and other indicators exceed the threshold for reliable data recording.

System action

The volume is made read-only.

User response

Check system error logs for entries made by the device relative to media errors. It is recommended to move the data off the volume in order to minimize the impact of future errors and further damage to the media.

**ANR88 Because of
31W media errors for
volume *Volume
name*, data
should be
removed as
soon as
possible.**

Explanation

Errors previously encountered on the volume leave the access to the data in a

questionable state. The errors may be permanent temporary media failures such as the corruption of the Volume Control Region of a Magstar drive.

System action

None.

User response

Move the data off the volume. This can be done with the MOVE DATA command. In some cases the tape is reusable by returning it to scratch. Check system error logs for entries made by the device relative to media errors. If the errors cannot be isolated ore resolved, contact your support representative. Return the tape to scratch or dispose of it.

**ANR88 CHECKIN
32E LIBVOLUME for
volumes in
search mode in
library library
name failed.**

Explanation

The background process for a CHECKIN LIBVOLUME command failed.

System action

The background process ends, but volumes were not checked into the library.

User response

To resolve the issue, complete the following steps: 1. Ensure that the affected library and drive devices are powered on and ready for operation.

2. To verify the status of the target slot, issue the SHOW SLOTS command. For example, if the library name is XYZ, issue the following command: show slots xyz 3. Review the command output: - If the status of a slot is FULL or UNKNOWN, reissue the CHECKIN LIBVOLUME command. - If the status of a slot is ALLOCATED, the server will not check in a volume from this slot to the target library because this volume is already checked into this library. 4. If a volume was already checked into the library, and this volume was manually removed from this slot, and a new volume was recently inserted into this slot, take the following actions: - Remove the new volume from the slot and restore the original volume to its original slot. - Check out the original volume. - Verify that the status of this slot is FULL. - Remove the original volume from the slot. - Insert the new volume into this slot and reissue the CHECKIN LIBVOLUME command.

**ANR88 Command:
33E Volume volume
name in library
library name is
currently being
checked in or
checked out.**

Explanation

The command cannot be processed because the specified volume is being checked in or checked out of the library.

System action

The command is not processed.

User response

Wait until the conflicting checkin or checkout has completed, and then reissue the command.

**ANR88 Library volume
34E volume name is
still present in
library library
name drive drive
name, and must
be removed
manually.**

Explanation

Library operations cannot be performed using the drive because a volume is still mounted in it. This may be due to a prior dismount failure that occurred on the drive.

System action

The command fails. The drive may be taken offline.

User response

See previous error messages and the system error logs to determine the cause of the dismount failure or any other reason the volume would still be loaded in the drive. Hardware diagnostics may be required. If necessary, remove the volume manually and place it in its storage cell. If the storage cell is unknown, place the volume in any cell and issue the AUDIT LIBRARY command. Use the

QUERY DRIVE command to determine the online status of the drive. If the drive is still functioning, change the status with the UPDATE DRIVE command.

**ANR88 Error returning
35W volume volume
name to scratch.**

Explanation

The server external library manager sent a RELEASE request to the external agent for the named volume, but the external agent was unable comply with the request. The server, however, marked the volume scratched in its inventory; consequently, the server inventory and the external agent inventory are not consistent. This message is issued to inform the customer that the external agent inventory must be made consistent with the server inventory using the facilities of the external agent.

System action

The server has returned the volume to scratch status.

User response

Consult the documentation for the external agent and take the appropriate action to make the agent inventory consistent with the server inventory.

**ANR88 Function
36E RSM_function
failed in
server_function
processing,**

**return return
code, call call
number.**

Explanation

The library function that uses the API to the Windows NT Removable Storage Manager failed with a return code from the API. The call number represents the exact API call issued in the program.

System action

The function fails.

User response

Use the RSM documentation to determine the source of the problem.

**ANR88 RSM Library
37E Library Name
not supported
on this Windows
platform.**

Explanation

The libtype=RSM was used on a Windows platform that does not support RSM.

System action

The function fails.

User response

Use another library type to define the library.

**ANR88 I/O error on
38E drive drive
name: excessive
unit attentions
received from
device.**

Explanation

An operation to the drive failed with a device unit attention. These are normally cleared when the operation is retried, but in this case subsequent recover and retry attempts persistently fail with unit attention. This indicates a device failure.

System action

The operation fails.

User response

See accompanying error messages and the system error logs to determine any reason for the drive failure. Hardware diagnostics may be required. It may be necessary to manually unload the volume and mark the drive offline with the UPDATE DRIVE command.

**ANR88 Drive drive
39W name of library
library name is
accessible.**

Explanation

The server is now able to use the mentioned drive that was inaccessible. However, the administrator has marked the drive offline while the drive was being polled.

System action

The drive is left offline and is not used for tape operations.

User response

Issue the UPDATE DRIVE command to bring the drive back online.

**ANR88 Unable to open
40E device device
name with error
number error
number and
PVRRC return
code.**

Explanation

The library is not accessible. As a result, an open request failed. This in turn causes the pending request to fail.

System action

A drive is marked inaccessible. The server polls the drive to determine if both the library and drive are inaccessible. In most case, the library had a temporary failure and recovers. When the server determines that the library is available, the drive is brought back on-line.

User response

Use the error number in conjunction with operating system documentation to narrow the scope of the cause. Inspect the library. Ensure that the library is powered on and ready, that the cables are properly connected, and that the device is properly configured to the system.

**ANR88 Remove volume
41I from slot
element number
of library library
name at your
convenience.**

Explanation

A volume has been placed in a multiple entry/exit port library because the volume should be placed back in the entry/exit port as result of the successful completion of a server command, or there was a problem during a server command. The volume needs to be removed from the library, but the operation is not critical.

System action

None.

User response

Remove the volume from the entry/exit slot. Examine previous messages for additional information regarding the specified volume and the command.

**ANR88 The Device type
42E drive detected a
marginal sector
and could not
reallocate the
sector for
volume Volume
name. Access
mode is now set
to "read-only".**

Explanation

The optical drive detected a marginal sector (media error) while reading the volume. The drive read the sector successfully but could not reallocate the sector because of a previous media error.

System action

The volume is made read-only.

User response

Check system error logs for entries made by the device relative to media errors. It is recommended to move the data off the volume in order to minimize the impact of future errors and further damage to the media.

ANR88 43E Initialization failed for library type library library name - the library will be inaccessible.

Explanation

The initialization process for the given library has failed. The server is unable to use the library. This may be for the following reasons:

- The library is defined without a path.
- The device for the library is removed by a DELETE PATH command.
- The data mover controlling the library is offline.
- The path to the library is offline.

System action

The library is made offline and will not be used for any library operations.

User response

Determine the reason the library is inaccessible. Render any needed corrections to the library, shut down the server, and re-bring up the server so that the library can be completely initialized.

ANR88 44E Remote drive drive name could not be opened because of the following error code: error value from server plugin.

Explanation

The server cannot open the specified remote drive.

System action

Server operation continues.

User response

To resolve the issue, complete the following steps: 1. Diagnose the issue by reviewing the documentation for the specified error code. 2. Ensure that the drive is powered on, ready for operation, and properly configured for the network-attached storage file server. 3. To verify whether other issues might affect the drive, review the system error log of the NAS file server and the network data management protocol (NDMP) message logs. The logs might provide information about one or more issues. For example, the drive might be busy, inaccessible due to a faulty network connection, or inoperable because of a hardware failure. 4. Resolve any detected issues and retry the operation.

ANR88 45E Loadable module module name is required for

remote operation.

Explanation

The indicated loadable module is required by the server to perform an operation on a remote drive or library, but the module has not loaded. Message ANR4726I is issued during server initialization when the module is loaded.

System action

The remote operation fails.

User response

Check the server activity log for message ANR4726I, indicating if the module was loaded. If you see this message during server initialization for this module, please contact your service representative. If you do not see this message, make sure the loadable module has not been delete, or contact your service representative.

ANR88 46E Volume volume name is assigned to a category that does not belong to library library name.

Explanation

The attempted operation on the volume cannot proceed because it is assigned to a category other than the insert, private, or scratch category used by the library.

System action

The attempted operation is terminated.

User response

Use the mtlb utility to query the volume's category. If the volume is not in use by another library, use mtlb to reassign the category or choose another volume that is assigned to the proper category.

ANR88 47E No device type type drives are currently available in library library name.

Explanation

The attempted operation cannot be completed on the specified library because there are no available drives of the specified type. A drive may be unavailable because a different application has the drive opened. This message may also be issued if a CHECKIN or LABEL command is issued and no drive is available to service the operation. This can be because all the drives are mounted by other processes or sessions, or the device type was incorrectly specified. This can also be issued when incorrect barcode labels are placed on the wrong type of media (e.g. LTO2 barcode label on an LTO1 cartridge).

System action

The attempted operation is terminated.

User response

Use the QUERY DRIVE command to check the online status of the drives. Drives that are marked "Unavailable since hh:mm yy/mm/dd" are drives taken offline by the server at the time specified because of hardware failures or the inability to open the drive. If the attempted operation is a CHECKIN or LABEL command, use the QUERY MOUNT command to determine if all the drives in the library are mounted and wait until one of these is available. If there are mounted volumes with an IDLE status, use the DISMOUNT VOLUME command to free its drive, and retry the original operation. Finally, the DEVTYPE parameter is required for CHECKIN and LABEL commands specifying 3590 volumes in a 349X library that also contains 3490 drives. This is because this library also supports 3490 volumes, and the default device type on CHECKIN and LABEL commands is CART (3490).

ANR88 Drive drive 48W *name of library library name is inaccessible; server has begun polling drive.*

Explanation

The server is unable to use the mentioned drive. This may be for the following reasons:

- The drive cannot be opened

- In the case of a 3494 or a library that can be partitioned, the drive may be unavailable to the library manager, may be in use by another application, or may be loaded with a cartridge not labeled for server use.

System action

The drive is temporarily made offline and is not used for tape operations. The server polls the drive at one-half minute intervals to check if the condition has cleared. Once the drives is accessible again, the drive is brought online.

User response

Determine the reason the drive is inaccessible, such as hardware errors reported in the system logs. Render any needed corrections to the drive. The drive will be brought online automatically when the polling process detects that it has become accessible.

ANR88 Command: 49E *There is already a request to delete drive drive name.*

Explanation

The designated drive cannot be deleted or updated because there is a request to delete the drive already.

System action

The command is not processed.

User response

None.

ANR88 ACSLS library 50I *library name is ready for operations.*

Explanation

The initialization process for the given library has completed successfully, and the library is ready for use.

System action

The library is made ready for use.

User response

None.

ANR88 Initialization 51E *failed for ACSLS library library name; will retry in delay time minute(s).*

Explanation

The initialization process for the given library has failed. It is retried automatically after the specified amount of time has elapsed.

System action

The initialization will be retried later.

User response

Ensure that the library device is powered on and ready.

ANR88 Initialization 52E *failed for ACSLS library library name.*

Explanation

The initialization process for the given library has failed and will not be retried until the next time the server needs to access the library.

System action

The library is made temporarily unavailable.

User response

None.

ANR88 Incompatible 53E *options CHECKLABEL=N O and SEARCH=YES for ACSLS libraries.*

Explanation

The CHECKLABEL=NO and SEARCH=YES parameters on the CHECKIN LIBVOL command are not compatible.

System action

The command fails.

User response

Reissue the CHECKIN LIBVOL command and specify CHECKLABEL=YES.

ANR88 ACSAPI(command name) 54E *invocation failed, status=acs status.*

Explanation

The ACSLS library API invocation for the given command failed.

System action

Depends on the server function and command, library may be unavailable.

User response

Contact your ACS System Administrator and perform ACSLS library problem determination.

ANR88 55E ACSAPI(*command name*) response with unsuccessful status, status=*acs status*.

Explanation

The ACSLS library API responded with an unsuccessful status as indicated.

System action

Depends on the server function and command, library may be unavailable.

User response

If the status indicates STATUS_CAP_IN_USE, it might be CAP priorities not set to non-zero. It might also be CAPs are not set to automatic mode, or CAPs are in manual mode during manual checkin. If CAP mode and priorities are set correctly, contact your ACS System Administrator and perform ACSLS library problem determination.

ANR88 56E ACSAPI sequence(*sequence number*) request (*request number*) timed

out, elapse
time=*hours:*
minutes:seconds
.

Explanation

The ACSLS client has received no response from the ACSLS server for the period as indicated in the elapsed time. The ACSLS library API function with the associated sequence number is canceled if the request number is non-zero.

System action

Depends on the server function and command, library may be unavailable.

User response

Contact your ACS System Administrator and perform ACSLS library problem determination.

ANR88 57I ACS access control set to user_id - user id, status= *acs status*.

Explanation

The ACSLS ACCESSID structure for command and volume access control is set the user_id as indicated.

System action

None.

User response

Ensure the indicated user_id is the same as specified in the environment variable ACSAPI_USER_ID.

ANR88 58W Unable to lock drive drive id,drive id, drive id,drive id, status= *acs status*.

Explanation

The ACSLS library function acs_lock_drive failed for the specified drive.

System action

Depends on the server function and command, library drive may be unavailable. or may be temporary unavailable in a shared library environment.

User response

Contact your ACS System Administrator and perform ACSLS library problem determination if the problem persists.

ANR88 59W Unable to lock volume volume id, status= *acs status*.

Explanation

The ACSLS library function acs_lock_volume failed for the specified volume.

System action

Depends on the server function and command, library volume is unavailable.

User response

Contact your ACS System Administrator and perform ACSLS library problem determination if the problem persist.

ANR88 60W Volume volume id is already locked by user id.

Explanation

The specified volume is already locked by other user or has a different lock id.

System action

Depends on the function, the volume maybe bypassed or the process maybe terminated.

User response

This may not be an error in a shared configuration. However, if the existing volume lock is not needed. contact your ACSLS system administrator to clear the lock the volume.

ANR88 61I Wait and monitor the ACSSA console message to remove volume volume id from CAP.

Explanation

The specified volume is about to put into CAP for removal. Monitor the ACSSA console and removed the volume after it has been placed into the CAP as indicated in the ACSSA message.

System action

None.

User response

Monitor the ACSSA console and wait.

ANR88 62I Unable to access ACS volume *volume id*.

Explanation

The specified ACSLS volume can not be accessed in the library. The possible reasons might be the volume is in use, the user is not authorized, the volume does not exist in the library.

System action

Depends on the server function and command, library volume is unavailable.

User response

Contact your ACS System Administrator and perform ACSLS library problem determination if the problem persist..

ANR88 63I Unlocking library *library name* volumes from the ACSLS server.

Explanation

The volumes of the specified library are being unlocked from the ACSLS server.

System action

The operation continues. The process may take a while depends on the number of volumes in the library.

User response

None.

ANR88 64I ACSLS library *library name* is

being re-initialized.

Explanation

The specified ACSLS library is being re-initialized.

System action

The operation continues. The process may take a while depends on the number of volumes in the library. All volumes in the library are being locked.

User response

None.

ANR88 65W Volume *volume name* bypassed for command, status=*acs_stat us*.

Explanation

The specified volume is bypassed. The volume is not in a valid status for the specified function.

System action

The operation continues.

User response

Determine the volume status from the ACSSA and re-issue the command if necessary.

ANR88 66E Incompatible option REMOVE=BULK for ACSLS libraries.

Explanation

The REMOVE=BULK option is not supported for ACSLS libraries. The final response of ACSAPI *acs_eject* does not return

to the application until the volume is removed from CAP.

System action

The command fails.

User response

Reissue the CHECKOUT LIBVOL command and specify REMOVE=YES or NO.

ANR88 67I Processing volume *volume id* for the command command.

Explanation

The specified volume is being processed for the specified command.

System action

The command process continues.

User response

None.

ANR88 68E Ejecting Volume *volume name* Failed, status = *acs_status* .

Explanation

The volume is failed to be ejected from the library due to the status as indicated

System action

The operation continues.

User response

Determine the volume status from the message and do something as needed

ANR88 69E Command: There is already a request to update drive *drive name*.

Explanation

The designated drive cannot be deleted because there is a request to update the drive already.

System action

The command is not processed.

User response

None.

ANR88 70E The path to the library *library name* is unavailable.

Explanation

There is no path to the given library, or the path to the library is offline, or the source entity of the path to the library is offline.

System action

The library is inaccessible.

User response

Ensure that a path is defined to the library. If there is path defined to the library, make sure the path is online and the source entity of the path is also online.

ANR88 71I The device name *device name* specified has been changed to *device name*.

Explanation

The specified device name on the DEFINE PATH or UPDATE PATH command has been changed to recommended device name.

System action

The command process continues.

User response

None.

ANR88 72E No path is available for drive *drive name* - could not unload volume *volume name* from drive.

Explanation

There is no path to the given drive or the path to the drive is offline or the source of the path to the drive is offline. The indicated volume may be still on the drive.

System action

The drive is inaccessible.

User response

Ensure that a path is defined to the drive. If there is a path defined to the drive, make sure that the path is online and that the source of the path is also online. Run the AUDIT LIBRARY command after the problem is corrected.

ANR88 73E The path from source *source name* to destination

drive name is taken offline.

Explanation

There is problem using the indicated path. The path is now marked offline.

System action

The path is inaccessible.

User response

Determine the reason the path is inaccessible, such as hardware problem. Render any needed corrections. Then, the path may be made online by issuing the UPDATE PATH command with the ONLINE=YES option.

ANR88 74E The type of device used by the media in element *element number* of library *library name* cannot be determined by the hardware. Volume is not processed.

Explanation

The library's mechanism for determining the type of media in a slot or EE port failed. This is usually the barcode reader or some other sensor that is part of the robotics.

System action

The volume is skipped by the process.

User response

Determine the reason the library could not determine the media

type, such as deteriorated barcode, scanner failure, or other hardware problem as determined by system engineer. If the barcode label is replaced on a private volume containing data, it must be with a label having the volume name. Scratch volumes or empty private volumes can be replaced with any barcode but they must be re-labeled if the barcode name changes.

ANR88 75E An illegal move was attempted involving the media in element *element number* of library *library name*. Its type is incompatible with the destination element *element number*.

Explanation

The server tried to move one type of volume into a drive or slot of another type that is incompatible. This is most likely because another volume has taken its slot, or the server's information for this volume has otherwise been corrupted.

System action

The process fails.

User response

Issue the AUDIT LIBRARY command, and retry the operation.

ANR88 76E The media in element *element number* of library *library*

name is a cleaner.

Explanation

The library hardware has determined that the media in the stated slot is a cleaner cartridge. It cannot be processed by the CHECKIN command without the STATUS=CLEANER parameter, and it cannot be labeled by the LABEL command.

System action

The process skips the media, or if it is the only media being processed the process fails.

User response

Issue the AUDIT LIBRARY command, and retry the operation.

ANR88 77E Volume *volume name* is incompatible type with device class *devclass name* in library *library name*.

Explanation

An attempt has been made to service a mount request, but the attempt fails because the media type of the cartridge being mounted is not compatible with the devclass requesting the mount. This is usually a conflict between WORM and Read-Write characteristics.

System action

The operation fails.

User response

If this is not a 3592 device or media, The volume was probably not checked in with the CHECKLABEL=YES parameter of the CHECKIN command. Check the volume out (the REMOVE=NO may be useful) and check the volume back into the library with this parameter to ensure that the mediatype is determined and saved. If this is a 3592 device or media, the volume probably has an incorrect barcode label indicating that it had the wrong WORM property. The label needs to be swapped for the opposite WORM type (e.g. WORM to non-WORM or non-WORM to WORM) or simply removed entirely from the library.

ANR88 78E Failed to close the remote library library name (device name).

Explanation

An attempt to close a remote Library device attached to a NAS File Server failed.

System action

The operation fails.

User response

Examine previous messages for additional information regarding the specified library.

ANR88 79E Failed to close the SCSI session for the remote library

library name(device name).

Explanation

An attempt to close a SCSI session for a remote Library device attached to a NAS File Server failed.

System action

The operation fails.

User response

Examine previous messages for additional information regarding the specified library.

ANR88 80W Device type of drive Drive name in library Library name was determined to be GENERIC_TAPE.

Explanation

The device type of a drive is determined when the path for that drive is defined. If the wrong device file was used in the device parameter of DEFINE PATH the device type of the drive will often be GENERIC_TAPE. If you are using the IBM Storage Protect device driver or the IBM tape device driver, then you should not have a device type of GENERIC_TAPE. You should only have a device type of GENERIC_TAPE if you are using the native OS device driver.

System action

None.

User response

Verify that GENERIC_TAPE is the desired device type for this drive. While the device type GENERIC_TAPE is valid, it is often a mistake, and thus, should be verified that it is the intended device type. If GENERIC_TAPE is not the intended device type, all paths for this drive and the drive itself will have to be deleted and redefined.

ANR88 81W Insufficient space for new volume in directory directory for device class device class name.

Explanation

The server found that the indicated directory had insufficient space in which to create a new volume.

System action

Other directories available to the device class are used, if any. If no directories with space are available, the operation fails. This message is issued periodically as requests are made for space in this directory.

User response

The file system must be expanded to accommodate volume growth.

ANR88 82I Request number: Please provide the label name

for the volume in drive drive name of library library name by issuing REPLY n LABEL=xxx within time limit minutes, where n is the request ID and xxx is the desired label name.

Explanation

A mount is in progress with AUTOLABEL, and the name of the volume is needed.

System action

The server waits until a REPLY command is issued.

User response

Issue a REPLY command, along with the request ID, and the volume name for the cartridge.

ANR88 83W The volume volume name in slot element number is in the library library name but not in the IBM Storage Protect's inventory database. Please either check in this volume or remove it from the library.

Explanation

.

System action

.

User response

The Audit Library command found this volume in this library but they are not in IBM Storage Protect's inventory database. This volume can be either checked in or removed from this library.

ANR88 84W Attempted to label a written WORM medium in the drive *drive name* with volume *volume name* (OP=*internal code*, Error Number=*internal code*, CC=*internal code*, KEY=*internal code*, ASC=*internal code*, ASCQ=*internal code*, SENSE=*sense data*, Description=*error or description*). Refer to the IBM Storage Protect documentation on I/O error code descriptions.

Explanation

An I/O error has occurred while labeling on the written WORM medium.

System action

The operation fails.

User response

Ensure the WORM medium in the drive is not a written WORM medium.

ANR88 85W The device type of drive *Device Name* is determined to be **GENERICTAPE**.

Explanation

You have specified GENERICTAPE=Yes when defining a path to this drive. The tape drive is supported and we recommend using with the IBM Storage Protect tape format instead of the generic tape format. To use the IBM Storage Protect tape format, do not specify GENERICTAPE=Yes when defining a path to the drive.

System action

None.

User response

Verify that GENERICTAPE is the desired device type for this drive. While the GENERICTAPE device type is valid, it is not recommended for a tape drive that is supported by the IBM Storage Protect server. If GENERICTAPE is not the intended device type, delete all paths to this drive and delete the drive itself. Then redefine the drive and a path without specifying GENERICTAPE=Yes.

ANR88 86E Element address mismatch: Element *element number* of library *library name* is reported by the library to be

element number.

Explanation

The library configuration appears to have changed. Verify that no other management interfaces are modifying the library inventory.

System action

None.

User response

Examine previous messages for additional information regarding the specified volume and the command that was issued. Retry the operation. It might be necessary to audit the library using the AUDIT LIBRARY command with the REFRESHSTATE=YES parameter.

ANR88 87E Volume *volume name* in the drive *drive name* has incompatible block size.

Explanation

The drive cannot read the label or data from the volume. This issue can be attributed to a different data block size set to this volume.

System action

The operation fails.

User response

If this issue appears during the tape label operation, this tape might be already labeled by the third-party application. In

this case, this error can be ignored. If this issue appears during a normal read data operation, check the tape device driver and ensure that the correct version of the device driver is installed.

ANR88 88W The persistent reserve key for the device *drive name* with the serial number *drive serial number* is cleared.

Explanation

The server is unable to preempt this device with the persistent key of the IBM Storage Protect server. Therefore, the server clears this key, which is set to this device.

System action

N/A

User response

Check the SAN configuration, ensure that this device is used by the IBM Storage Protect server.

ANR88 89E The volume *volume name* in the drive *drive name* of the library *library name* does not have a standard IBM label.

Explanation

The volume label is in ASCII format, but the server can read only EBCDIC format. Also if the label blocks are corrupted, the server cannot read the volume label.

System action

The server rejects the volume.

User response

To use the specified volume with the server, you must overwrite the label in EBCDIC format. To overwrite the label, complete one of the following steps:

- For a non-WORM tape volume, issue the LABEL LIBVOLUME command. Alternatively, issue the DEFINE LIBRARY command for the tape volume and specify AUTOLABEL=OVERWRITE.
- For a WORM tape volume, issue the LABEL LIBVOLUME command.

Restriction: A WORM tape volume can be relabeled only if it is a scratch volume.

If the server still fails to read the label after you relabel the volume, check and update the HBA firmware and the tape drive firmware. You can also report the issue to your hardware vendor.

ANR88 90E The label for WORM volume *volume name* in drive *drive name* does not comply with IBM standards.

Explanation

The label has only an HDR1 block and lacks other required blocks. The label also includes two file marks. Because

the label does not comply with IBM standards, operations to restore data to the volume will fail.

System action

The server can back up data from the volume. However, the server cannot restore data to the volume.

User response

To use the specified volume with the server, you must overwrite the label with a new label in IBM standard format. Relabel the volume by issuing the LABEL LIBVOLUME command. Restriction: A WORM tape volume can be relabeled only if it is a scratch volume.

ANR89 01E Command: Incompatible options STATUS=CLEANER and CHECKLABEL=YES.

Explanation

Cleaner cartridges do not have internal labels that can be checked by loading them into the drive.

System action

The command fails.

User response

Reissue the CHECKIN LIBVOL command and include the parameter, CHECKLABEL=BARCODE (with SEARCH=YES specified), or include the parameter CHECKLABEL=NO (with

the required volume name specified in the CHECKIN command).

ANR89 02W A failure occurred during an attempt to check in a tape cleaner cartridge to library *library name*, slot *element number* *element number*. The bar code of the cartridge could not be read or is invalid.

Explanation

The bar code reader for the specified library was unable to read the cleaner cartridge label, or the label is invalid.

System action

System operation continues. If the tape library is being searched, the check-in process continues with the next volume.

User response

To resolve the issue, take one or more of the following actions:

- Examine the cartridge to ensure that the bar code label is valid. Cleaner cartridge labels should have a prefix of CLN. If the label is not valid, use a new label (supplied by the cartridge vendor) and attach it to the cartridge.
- Ensure that the bar code reader is configured and operational.

- Ensure that the label is compatible with the bar code reader. Not all vendor labels are readable by all bar code readers.

If the previous actions do not resolve the issue of checking in the cleaner cartridge, check in the cleaner cartridge without a bar code label by issuing the CHECKIN LIBVOL command. For the CHECKLABEL parameter, you can specify YES or NO, but do not specify BARCODE. For details, see the online product information for the CHECKIN LIBVOL command.

ANR89 03E Command: Missing CLEANINGS parameter for cleaner cartridge checkin.

Explanation

When checking in a cleaner cartridge, the CLEANINGS parameter is required.

System action

The command fails.

User response

Reissue the CHECKIN LIBVOL command and specify a value for the CLEANINGS parameter which is used to determine the number of times a cleaner can be mounted to clean a drive.

ANR89 04I Command: Cleaning operation for drive *drive name*

in library library name started as process process ID.

Explanation

A command-driven process is started to clean the specified drive. The process is assigned the ID that is in the message.

System action

In response to the CLEAN DRIVE command that is issued by an administrator, the server starts a background process to perform the operation.

User response

To obtain status on the process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR89 CLEAN DRIVE 05I process for drive drive name in library library name is been canceled.

Explanation

A background server process is has been working to clean the specified drive and is canceled by the CANCEL PROCESS command.

System action

The cleaning process is ended.

User response

None.

ANR89 Cleaning drive 06I drive name in library library name.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CLEAN DRIVE process on the server. The given volume is being checked in to the designated library.

System action

The background process operation continues. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR89 CLEAN DRIVE 07E for drive drive name in library library name failed.

Explanation

The background process for a CLEAN DRIVE fails.

System action

The background process ends, but the drive is not cleaned.

User response

Make sure the library and drive devices associated with this command are powered on and ready. Reissue the command.

ANR89 CLEAN DRIVE 08I for drive drive name in library library name completed successfully.

Explanation

The specified drive is successfully cleaned in the library during processing of a CLEAN DRIVE command.

System action

The drive is available for normal library operations.

User response

None.

ANR89 Cleaning drive 09I drive name in library library name- CANCEL PENDING.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a CLEAN DRIVE process on the server.

System action

The background process operation is terminated.

User response

None.

ANR89 No cleaner, or 10I no cleaner with cleanings left, found in library library name.

Explanation

A drive is selected to be loaded with a cleaner cartridge, but no cleaner, or cleaner with cleanings

left, is found in the library's inventory.

System action

The drive is available for normal library operations.

User response

A cleaner should be checked in to the library by issuing the CHECKIN LIBVOL command.

ANR89 The cartridge in 11W storage element slot element address in library library name is not a cleaner cartridge as was expected.

Explanation

The cartridge is listed in the library's inventory with a cleaner volume status. After loading the cartridge in the specified storage cell into a drive for cleaning, it is determined that it is not a cleaner cartridge.

System action

The drive is available for normal library operations.

User response

Verify all other cleaner cartridges are in the correct storage cells. Issue the QUERY LIBVOLUME command to obtain the storage cells of all the cartridges currently checked into IBM Storage Protect. The cartridge should be checked out of the library by issuing the CHECKOUT LIBVOL command if the cartridge is still listed

in the library's inventory with a cleaner volume status. If necessary a cleaner cartridge should be checked in to replace it.

ANR89 12E Unable to verify the label of volume from slot-element element-address in drive drive name in library library name.

Explanation

The volume from the slot that is identified by the element address is loaded into a drive. The drive cannot be opened following the load. The label cannot be read to process the volume.

System action

The volume is stored, and processing continues with the next available slot.

User response

Check the system error logs for errors reported by the drive that are related to this volume. Make sure that the cartridge is not a cleaner cartridge that would have been loaded by mistake. If the cartridge is a cleaner, issue the QUERY LIBVOL command to get the correct storage slot for the cleaner and move the cleaner to that slot. If the cleaner is not in the library's inventory, use the CHECKIN LIBVOL to check the cleaner in. During Audit Library, remove the bad volume from the reported slot and run Audit Library again.

ANR89 13I Drive drive name in library library name is currently in use. The CLEAN DRIVE process is unable to run immediately.

Explanation

A background process operation to clean the drive is unable to run because the drive is in use. However, the drive cleaning flag is set, and the CLEAN DRIVE process will run when the next mount request is issued for the drive.

System action

The background CLEAN DRIVE process operation does not run. The drive cleaning flag is set and the CLEAN DRIVE operation will run when the next mount request is issued for the drive. During the CLEAN DRIVE process operation, the server loads the cleaning cartridge into the drive and runs the cleaning operation first. Once the cleaning operation is done, the cleaning cartridge is moved back to its home slot in the library. The server then processes the tape mount request. If the CLEAN DRIVE command is issued to a tape drive that is offline, the CLEAN DRIVE process will not run. If the CLEAN DRIVE command is issued to a tape drive where the tape drive path is offline, the server will set the drive cleaning flag and the cleaning operation will run when the drive path is online again.

User response

Verify that the target drive and associated drive path are online and that the cleaning cartridge is loaded into the library drive.

ANR89 14I Drive drive name in library library name needs to be cleaned.

Explanation

The drive has returned indicating to the server that it needs to be cleaned.

System action

The server marks the drive to be cleaned. If the drive is enabled for server-managed cleaning, and a cleaner cartridge is checked into the library, the server will load the cleaner into the drive after the current volume is dismounted. See the DEFINE DRIVE and QUERY DRIVE commands for information on enabling server-managed cleaning. See the CHECKIN LIBVOL command for checking a cleaner into the library.

User response

None.

ANR89 15I Cleaning cartridge cleaner name in library library name is near end of life; has cleanings left uses left.

Explanation

A cleaner cartridge is found and used, but its number of uses it has left is nearly exhausted.

System action

The cleaning operation continues.

User response

As the cleaner is used, monitor the number of cleanings that remain with the QUERY LIBVOL command. Remove the cleaner when all cleanings are exhausted. A new cleaner may be checked in so that the library is not left without a useful cleaner when the old cleaner is exhausted.

ANR89 16I Drivemapping for drive Drive name in library library name on storage agent storage agent name defined.

Explanation

A drive mapping has been successfully defined for the specified drive.

System action

The drivemapping is defined and recorded in the database.

User response

None.

ANR89 17I Drive mapping for drive Drive name in library library name on storage agent storage agent name updated.

Explanation

An UPDATE DRIVEMAPPING request has been successfully processed for the given drive.

System action

The server updates its information about the drive mapping.

User response

None.

ANR89 18I Drive mapping for drive *Drive name* in library *library name* on storage agent *storage agent name* deleted.

Explanation

The drive mapping for the specified storage agent, library, and drive has been deleted successfully.

System action

The drive mapping is deleted.

User response

None.

ANR89 19I Initialization and recovery has started for shared library *library name*.

Explanation

The shared library has started to initialize or recover to resynchronize the library manager and library client.

System action

None.

User response

This process should resynchronize all of the drives that are currently being used by this library client. This process might also start after a communication error or if the library client has not been able to verify drive status with the library manager.

ANR89 20I Initialization and recovery has ended for shared library *library name*.

Explanation

Initialization or recovery has ended the library manager and library client should be synchronized.

System action

None.

User response

The drives previously owned by the library client should now indicate they are free on the library manager. Verify this with the QUERY DRIVE command on the library manager. If ownership of the drives is still in question restart the library client and library manager.

ANR89 21E Unable to start library polling thread.

Explanation

Library sharing requires that this polling thread

starts. This thread keeps the library manager and library client synchronized with regards to drive ownership. These thread are started when the library is defined or when the server is first initialized.

System action

None.

User response

Since the polling thread did not start, the user must restart the server in order for library sharing to correctly work. Failure to restart the server and get these polling services running can cause unusual results for library clients.

ANR89 22I A device class for library *library name* was not found.

Explanation

A library client request a mount operation to be performed by the library manager. The library manager is missing a device class definition for that library.

System action

None.

User response

Define a device class for the library using the DEFINE DEVCLASS command.

ANR89 23I Dismount failed because drive *drive name* in library *library name* is not

currently owned by *drive owner name*.

Explanation

A library client attempted to dismount a drive that was not currently owned by the library client.

System action

None.

User response

None.

ANR89 25W Drive *drive name* in library *library name* has not been confirmed for use by server *server name* for over elapsed time seconds. Drive will be reclaimed for use by others.

Explanation

The library server was unable to contact the library client for the given interval to verify that the library client is still using the drive. At this point the error recovery logic of the library manager will reclaim the drive (including dismounting the client's volume if possible) and allow other to use the drive.

System action

None.

User response

Verify that the library client with the above server name is still running. Verify that

the sessions have not been disabled and the network is still working between the two host machines. Verify that the server definition (QUERY SERVER) on both the library manger and the library client are correct.

ANR89 26W **An Error was encountered while confirming the use of drive drive name in shared library library name.**

Explanation
The library client was unable to confirm the usage of the drive to the with the library manager.

System action
None.

User response
Verify that the sessions have not been disabled and the network is still working between the two host machines. Verify that the server definition (QUERY SERVER) on both the library manger and the library client are correct.

ANR89 27W **This library client has been unable to contact the library manager for elapsed time seconds. Releasing ownership of all drives in the shared library library name.**

Explanation
The library client was unable to confirm the usage of the drive with the library manager. The library client will now dismount all volumes that it currently owns.

System action
None.

User response
Verify that the sessions have not been disabled and the network is still working between the two host machines. Verify that the server definition (QUERY SERVER) on both the library manger and the library client are correct.

ANR89 28W **Library library name specified for shared file device class device class name was not defined as shared. The device class will not be shareable unless the library is updated.**

Explanation
A pre-existing library was specified for a new shared file device class. However, files in the device class cannot be shared unless the library is also shared.

System action
None.

User response
Issue the UPDATE LIBRARY libname SHARED=YES command to make the library shared.

ANR89 29E **Library library name specified for shared file device class device class name was not defined as a FILE library.**

Explanation
A pre-existing library was specified for a new shared file device class. However, the existing library was not created with the LIBTYPE=FILE parameter.

System action
None. The device class is not created.

User response
Specify a library name that was created with the LIBTYPE=FILE and SHARED=YES parameters, or specify a library name which does not exist, in which case, the library will be created. You can also not specify the LIBRARY parameter, a library name will be created.

ANR89 30W **An attempt to define drives to create drives failed for library library name. The device class has a mount limit of mount limit but the number of drives in the associated**

library is less than the mount limit.

Explanation
When a shared device class is created or updated, an attempt is made to define additional file drives in the associated library up to the mount limit, if the number of drives is less than the mount limit. One or more failures occurred in defining additional drives. The number of drives does not correspond to the mount limit for the associated device class. This can cause resource balancing problems between the server and storage agents.

System action
The server continues operation.

User response
Use the QUERY DRIVE command to get the names of the drives associated with the library. Use the QUERY DEVCLASS deviceclass F=D command to find the mount limit of the associated device class. Use the DEFINE DRIVE command along with the DEFINE PATH command for this new drive with DEVICE=FILE to define additional drives in the file library to match the mountlimit of the associated device class.

ANR89 31W **An attempt to delete drives to delete drives failed for library library name.**

The device class has a mount limit of *mount limit* but the number of drives in the associated library is greater than the mount limit.

Explanation

When a shared device class is updated and the number of drives in the associated library is greater than the mount limit of the device class, an attempt is made to delete drives so that there are as many drives as the mount limit. One or more failures occurred in deleting drives. The number of drives does not correspond to the mount limit for the associated device class. This can cause resource balancing problems between the server and storage agents.

System action

The server continues operation.

User response

Use the QUERY DRIVE command to get the names of the drives associated with the library. Use the QUERY DEVCLASS deviceclass F=D command to find the mount limit of the associated device class. Use the DELETE DRIVE command to delete drives until the number of drives in the library corresponds to the device class's mount limit.

ANR89 32W The drive map for server *servername*, library *library name*, drive name *drive name* has directory *directory* which is different than other drive maps for drives within the same library.

Explanation

A shared file was about to be created. In doing so, it was determined that there are differing definitions for the directories associated with the drive maps between the indicated drive map and other drive maps for drives in the same library. This could cause data to be written in unanticipated locations or may prevent data from being written.

System action

The server continues operation using the indicated directory.

User response

Use the QUERY DRIVEMAP command with the F=D parameter to list the directories associated with drive maps for drives in the indicated library and ensure that the directories are correct and identical. Use the UPDATE DRIVEMAP command to update any incorrect directory entries.

ANR89 33W File *volumename* in

library *library* does not exist in the expected directory.

Explanation

A FILE volume was being dismounted from a file drive. The file does not exist in the directory in which it was expected to be found.

System action

The server continues operation.

User response

It is possible that a drive mapping is incorrect and that a storage agent is using a valid, but different directory than that of the server. In this case, the storage agent can access the file, but the server cannot. Use the QUERY PATH command with the F=D parameter to list the directories associated with drive maps for drives in the indicated library and ensure that the directories are correct and identical. Use the UPDATE PATH command to update any incorrect directory entries. To move the file into the correct directory, use the Windows move command or the Unix mv command, depending on your platform.

ANR89 34W File *volumename* in library *library* associated with device class *device class* could not be inserted into the library inventory.

Explanation

A FILE volume was being inserted into the library inventory. The file was not found in the directory associated with the device class that references the library. However, an entry for the indicated file name is already in the library inventory.

System action

The server continues operation.

User response

It is possible that a drive mapping is incorrect and that a storage agent is using a valid, but different directory than that of the server. In this case, the storage agent can access the file, but the server cannot. Use the QUERY DRIVEMAP command with the F=D parameter to list the directories associated with drive maps for drives in the indicated library and ensure that the directories are correct and identical. Use the UPDATE DRIVEMAP command to update any incorrect directory entries. To move the file into the correct directory, use the Windows move command or the Unix mv command, depending on your platform.

ANR89 35E A compatible device class for shared library *library name* on server *server name* was not found.

Explanation

The library client server has a device class definition that is not compatible with the device class definition on this server. The device type and recording format need to be the same on both servers or one of the servers can have a device type of generic tape.

ANR89 36W The path conversion of drive *drive name* in library *library name* with device name *device name* failed. UPDATE DRIVE required.

Explanation

During the initialization of a library, the server finds that the drive path was removed.

System action

The drive will not be accessible by the library during tape operations.

User response

The drive may be made accessible by issuing the UPDATE DRIVE command with the DEVICE= option.

ANR89 37W The device name for drive *drive name* in library *library name* is missing. UPDATE DRIVE required.

Explanation

The device name for a drive was found to be missing.

System action

The drive will not be accessible by the server for tape operations.

User response

The drive may be made accessible by issuing the UPDATE DRIVE command with the DEVICE= option.

ANR89 38E Initialization failed for Shared library *library name*; will retry within delay time *delay time* minute(s).

Explanation

The initialization process for the given library has failed. It will be retried automatically in the specified time.

System action

The initialization will be retried later.

User response

Ensure that the library manager server is running, and the library is initialized.

ANR89 39E The adapter for tape drive *drive name* cannot handle the block size needed to use the volume.

Explanation

The adapter cannot read and write the block size need for the volume because the MAXIMUMSGLIST parameter of the adapter is set to less than hex 41.

System action

The volume will not be mounted in the drive.

User response

The adapter must be updated to handle a larger block size. The setting is usually MAXIMUMSGLIST in the Windows registry under:

HKEY_LOCAL_MACHINE->SYSTEM->Current Control Set->Services->{vendor device name}->Parameters->Device

Note that "{vendor device name}" should be substituted with the name of the vendors device. For example, the Qlogic 2200 would use "Ql2200" for the respective vendor device name.

MAXIMUMSGLIST should be set to hex 41 to work properly with IBM Storage Protect.

You can also run the DSMMAXSG utility to set the MaximumSGList value to 0x41(65) for all HBAs.

For additional information, see the HBA documentation or contact the vendor for the HBA.

For additional questions, contact IBM support.

ANR89 40E Path definition for file drive *drive name* in library *library name* for server *server or storage agent name* does not have a matching directory in the device class directory attribute for

volume *volume name*.

Explanation

A library client or storage agent requested a mount of a file volume in a drive that is contained in a file library but the path definition does not contain a matching directory name. There must be a matching directory in the PATH definition for each drive in a file library and the corresponding directories in the device class associated with the library. The directories in the PATH definition must point to the same storage as those of the device class definition, from the perspective of the specific server or storage agent. The list of directories must have entries for each directory in which file volumes are to be read or written by the specified server or storage agent.

System action

The operation will fail.

User response

Ensure that DIRECTORY attribute of the above path definition contains matching directories for each of the directories in the server's device class definition.

ANR89 41W The volume from slot-*element* *element-address* in drive *drive name* in library *library name* is blank.

Explanation

The volume in the slot is not labeled and is blank.

System action

The volume is skipped, and processing continues with the next available slot. If the volume is checked in, it is removed from the inventory.

User response

Label the volume using LABEL LIBVOL, and check it in using CHECKIN LIBVOL.

ANR89 42E Could not move volume *volume name* from slot-*element-address* to slot-*element-address*.

Explanation

Could Not move volume from slot to slot.

System action

Move volume operation failed.

User response

Check previous error messages related to this operation for more information. If the recommended actions from other error messages do not resolve the situation (or there are no other errors messages), issue the AUDIT LIBRARY command to detect and remedy inconsistencies in the library inventory. This command restores the library volume

inventory to a consistent state with the volumes that physically reside in the library. After the AUDIT LIBRARY command completes, if the volume is not in the library inventory, it will need to be checked back into the library with the CHECKIN LIBVOLUME command.

ANR89 43E A hardware or tape media error occurred during an operation on library *library name*, **OP=internal code**, **CC=internal code**, **KEY=internal code**, **ASC=internal code**, **ASCQ=internal code**, **SENSE=sense data**, **Description=error or description**). For more information about input/output (I/O) error codes, see the IBM Storage Protect documentation.

Explanation

The error might be related to hardware, tape media, or configuration issues.

System action

System operations continue, but the specified library operation fails. If the cleaning threshold is exceeded for a tape drive

in the library, the server marks the drive as being offline.

User response

To resolve the issue, take one or more of the following actions:

- Ensure that the DEVICE parameter that is associated with the library was identified correctly in the DEFINE PATH command. To query the path, use the QUERY PATH command. To update the path, use the UPDATE PATH command.
- Ensure that the library device is turned on and ready for operation.
- If the library device has an access door, ensure that the door is closed.
- If the cleaning threshold is exceeded for a tape drive in the library, clean the tape drive. Then, bring the drive online by issuing the UPDATE DRIVE command with the ONLINE=YES setting. To verify that the drive is online, you can issue the QUERY DRIVE command with the F=D setting.
- If a volume in a virtual tape library has insufficient memory, review the library configuration and make any necessary adjustments. For more information about the values of the KEY, ASC, and ASCQ fields, see the library and drive reference manuals.

ANR89 44E A hardware or media error occurred on

drive drive name with volume *volume name*, **OP=internal code**, **error number=internal code**, **CC=internal code**, **KEY=internal code**, **ASC=internal code**, **ASCQ=internal code**, **SENSE=sense data**, **Description=error or description**). For input/output (I/O) error code descriptions, see the IBM Storage Protect documentation.

Explanation

The error might be related to hardware, tape media, or configuration issues.

System action

System operations continue, but the specified device operation fails. If the cleaning threshold is exceeded for a tape drive in the library, the server marks the drive as being offline.

User response

To resolve the issue, take one or more of the following actions:

- Ensure that the DEVICE parameter that is associated with the device was identified correctly in the DEFINE PATH command. To query the path, use the

QUERY PATH command.
To update the path,
use the UPDATE PATH
command.

- Ensure that the tape device is turned on and ready for operation.
- If the cleaning threshold is exceeded for a tape drive in the library, clean the tape drive. Then, bring the drive online by issuing the UPDATE DRIVE command with the ONLINE=YES setting. To verify that the drive is online, you can issue the QUERY DRIVE command with the F=D setting.
- If a volume in a virtual tape library has insufficient memory, review the library configuration and make any necessary adjustments. For more information about the values of the KEY, ASC, and ASCQ fields, see the library and drive reference manuals.

**ANR89 Scratch volume
45W mount failed
volume name.**

Explanation

Scratch volume mount failed.

System action

Scratch volume mount operation failed.

User response

None.

**ANR89 There were
46W more labels in
the vollist than
volumes**

**available to
label.**

Explanation

Label Libvolume command still finishes without error, but the last labels provided were not used. Labeling finished when there were no more volumes available.

System action

All available volumes were labeled, but additional volume names were not utilized from the vollist.

User response

None.

**ANR89 There were less
47W labels in the
vollist than
volumes
available.**

Explanation

Label Libvolume command still finishes without error, but volumes are left unlabeled.

System action

Additional volumes were left unlabeled.

User response

None.

**ANR89 Device device,
48S volume volume
name has issued
the following
Critical
TapeAlert:
alertmessage**

Explanation

The specified device while loaded with the named volume has issued a TapeAlert critical message. This message is a feature of the hardware and is from the device, not the IBM Storage Protect server. It is surfaced at the termination of the current operation but is independent of the operation.

System action

The operation may or may not fail, depending on other error indications such as check conditions from the device. The TapeAlert message does not by itself indicate failure. See other messages related to the device or volume in the activity log.

User response

Proper response may be indicated in the text of the TapeAlert. The context of the TapeAlert may need to be determined from other activity log messages in order to follow its recommendations.

**ANR89 Device device,
49E volume volume
has issued the
following
Critical
TapeAlert:
alertmessage**

Explanation

The specified device regardless loaded or not without the named volume has issued a TapeAlert critical

message. This message is a feature of the hardware and is from the host interface, not the IBM Storage Protect server. It is surfaced at the termination of the current operation but is independent of the operation.

System action

The operation will fail. The TapeAlert message does not by itself indicate failure. See other messages related to the device or volume in the activity log.

User response

Proper response may be indicated in the text of the TapeAlert. The context of the TapeAlert may need to be determined from other activity log messages in order to follow its recommendations.

**ANR89 Device device,
50W volume volume
has issued the
following
Warning
TapeAlert:
alertmessage**

Explanation

The specified device without the volume name has issued a TapeAlert Warning message. This message is a feature of the hardware and is from the device, not the IBM Storage Protect server. It is surfaced at the termination of the current operation but is independent of the operation.

System action

The operation will fail.
See other messages related to the device or volume in the activity log.

User response

Proper response may be indicated in the text of the TapeAlert. The context of the TapeAlert may need to be determined from other activity log messages in order to follow its recommendations.

ANR89 Device device, 51I volume volume has issued the following Information TapeAlert: alertmessage

Explanation

The specified device while loaded with the named volume has issued a TapeAlert information message. This message is a feature of the hardware and is from the device, not the IBM Storage Protect server. It is surfaced at the termination of the current operation but is independent of the operation.

System action

The operation may or may not fail, depending on other error indications such as check conditions from the device. The TapeAlert message does not by itself indicate failure. See other messages related to the device or volume in the activity log.

User response

Proper response may be indicated in the text of the TapeAlert. The context of the TapeAlert may need to be determined from other activity log messages in order to follow its recommendations.

ANR89 Library serial 52E number does not match that defined for library name .

Explanation

The serial number defined for the specified library does not match the serial number discovered. The pending operation will fail.

System action

The library is taken offline when the mismatch is discovered. Verify the serial number and the device name for the library against those defined. If they do not match, the definitions for the library are incorrect and need updated. Once the serial number is updated, the library will be brought back online.

User response

Update the serial number or device name for the specified library with the correct values.

ANR89 Library library 53I name with serial number serial number is updated with the newly discovered serial number serial number.

Explanation

The serial number for the library defined does not match with the serial number discovered. The newly discovered serial number will replace the existing definition for this library since autodetect is on.

System action

The existing serial number for the specified library is replaced by the newly discovered serial number.

User response

None.

ANR89 Failed to obtain 54E a path for drive drive name for library library name.

Explanation

An attempt to acquire a path for the drive failed. This most likely means that a path is not defined for this drive.

System action

The operation fails.

User response

Ensure that a path is defined for this drive. If one is defined, make sure it is defined correctly with the correct source and destination type. If the drive is in a shared FILE library:

Ensure that the number of paths defined for the storage agent is the same as the number of drives within the library.

Ensure that the directories are correct in the server device-class definition and the storage-agent path definitions.

Ensure that the number and order of directories for each path for the storage agent is the same as the number and order of directories in the device-class directory definition.

ANR89 Drive drive 55I name in library library name with serial number serial number is updated with the newly discovered serial number serial number.

Explanation

The serial number for the drive defined does not match with the serial number discovered. The newly discovered serial number will replace the existing definition for this drive since autodetect is on.

System action

User response

None.

ANR89 Serial number 56E defined for library library name does not match the discovered serial number.

Explanation

The serial number for the library defined does

not match the serial number discovered due to autodetect is set to NO. The pending operation will fail.	a new library and path should be defined with DEFINE LIBRARY and DEFINE PATH.	Explanation Whether the status of Tape Alerts from SCSI devices will be display.	System action .
System action A mismatch between the serial number for library and the newly discovered serial number is detected.	ANR89 Command: 58E Autodetect is OFF and the serial number reported by the drive did not match the serial number in the drive definition.	System action The command is processed.	User response None.
User response Update the serial number for the specified library with the correct values.	Explanation An invalid value has been provided for the specified parameter.	User response None.	ANR89 Unable to find 63E path to match the serial number defined for drive drive name in library library name.
ANR89 Command: The 57E serial number reported by the library did not match the serial number in the library definition.	System action The command is not processed.	ANR89 Serial number 61E defined for library library name and drive drive name is blank and does not match the discovered drive serial number serial number.	Explanation A device may have hardware problems or a device path may have been changed and the IBM Storage Protect server cannot find the new path with the SAN Discovery option set to ON. The IBM Storage Protect server cannot get device information when it cannot open the device. Therefore, the IBM Storage Protect server cannot validate the drive serial number to see if this drive with the failed open operation is the same drive as it previously used. The causes of this failed open device may be a bad cable, a bad drive or a bad HBA card. However, if an incorrect drive is used (for example, an incorrect device path) and with the SAN discovery option set to OFF or UNSCANNEDPATHOFF, the IBM Storage Protect server will not search the SAN environment to get a proper device.
Explanation The serial number of the library in the database did not match the serial number of the library found using the device special file specified. UPDATE PATH cannot be used to change libraries, and thus, the new device must have the same serial number as stored in the database unless the serial number in the database is empty.	User response Reissue the command, and specify a valid parameter value.	Explanation A device has been swapped and we are not able to get the new path.	
	ANR89 Path to the 59W library or the device does not exist.	System action .	
	Explanation A path to the library or the device does not exist yet.	User response None.	
	System action This may not be an error.	ANR89 Unable to find 62E path to match the serial number defined for library library name.	
	User response None.	Explanation Either a device has hardware problems or a device path has been changed and the IBM Storage Protect server cannot find the new path with the SAN Discovery option set to ON.	System action The IBM Storage Protect server may mark this device offline for SAN
	ANR89 Command: The 60I display of Tape Alerts from SCSI devices is status.		

Discovery option ON or UNSCANNEDPATHOFF.

User response

Users should check the IBM Storage Protect server option file first. If SAN discovery option is set to OFF or UNSCANNEDPATHOFF, set it to ON and check for hardware errors on the device. If the SAN discovery option is set to ON, then check the device to see if there is a hardware problem.

ANR89 64W Unable to update the path in the database path source name and drive drive name.

Explanation

The system is not able to update the path information in the database.

System action

.

User response

None.

ANR89 65W The server is unable to obtain the serial number of the SCSI device device name.

Explanation

The server cannot detect a device serial number from the HBAAPI or the device itself, so the server is not able to automatically correct the path for the device.

System action

Server operation continues.

User response

Verify the following:

- The device name in the path definition is correct.
- The correct version of the HBAAPI is installed to the system.
- The SANdiscovery option is set to ON in the options file.

ANR89 66E Cannot get device number for the drive drive name.

Explanation

The server is unable to obtain the device number for the specified drive. This could occur if an invalid device name is specified for the drive or if there is hardware errors.

System action

The drive is temporarily made offline and is not used for tape operations. The server polls the drive at one-half minute intervals to check if the condition has cleared. Once the drives is accessible again, the drive is brought online.

User response

Determine the reason the drive is inaccessible, such as hardware errors reported in the system logs or an invalid device name was specified for the drive. Render any needed corrections to the drive. The drive

will be brought online automatically when the polling process detects that it has become accessible.

ANR89 67E Command: The drive serial conflicts with an existing drive in library library name.

Explanation

The serial number already exists in the drives in the given library.

System action

The command is not processed.

User response

Specify a valid serial parameter for this drive.

ANR89 68E Unable to create path for device device.

Explanation

An attempt to contact the drive with a given device name failed. This probably means the device name is incorrect, but this attempt can also fail for other reasons.

System action

Operation failed.

User response

The device parameter is probably not valid. This could be temporary, but not necessarily. If this occurs while upgrading from IBM Storage Protect Version 4.1 or previous (where paths were not used), then the drive needs to be deleted,

redefined, and a new path needs to be defined with a valid device parameter. If this occurs on an IBM Storage Protect server that already has paths (Version 4.2 or higher), then just update the drive to online. The device parameter on the drive path can also be updated before the drive is turned online, if you know the device parameter should be changed.

ANR89 69E The owner of volume Volume name can not be updated to owner Owner name.

Explanation

A command was issued updating ownership of a volume. The owner of this particular volume can not be changed.

System action

The command is not processed.

User response

None.

ANR89 70E Unable to open special file specialfile for tracing parameter device driver; errno = errno.

Explanation

The special file created by the device driver for tracing purposes could not be opened by the server. This file should be created when the device driver is configured on the system

System action

Device driver tracing could not be started.

User response

Make sure that the special file exists and can be accessed by the server. If the device driver has not been completely configured and special files created for all devices, do so. The device driver can also be traced by specifying the name of a library or drive that has been defined to the IBM Storage Protect Server.

ANR89 71E Unable to validate directory name *directory name* for *parameter* command.

Explanation

The specified directory name was being used in the indicated command. The server attempted to validate that the directory was accessible so that it could be used in the command definition. The server was unable to validate that the directory was accessible.

System action

The command fails. The server continues.

User response

Make sure that the directory exists and can be accessed by the server.

ANR89 72E *command:* Unable to find the element number for drive *drive name*

in library *library name*.

Explanation

Because the drive serial number does not match any drive serial number in the serial/element number map reported by the library, the element number cannot be determined.

System action

The command is not processed.

User response

Make sure the serial number entered for the drive is correct if AUTODETECT is not active. If AUTODETECT is active, the drive serial number might be incorrect or the library reported an incorrect serial/element number map. Contact your service representative.

ANR89 73E Device reset failed to break the reservation set by another system for device *device name* with path *path name*.

Explanation

The attempt to reset the device reservation set by another system failed.

System action

No system action taken.

User response

If this tape device is a Fibre Channel direct attached device

on Windows 2003, make sure that the HBA driver is a StorPort driver by checking the HBA vendor's support web site. The device reset (LUN Reset) on Windows 2003 requires a StorPort driver. Otherwise, you might need to restart the device to reset the reservation so that the device is accessible. If this device is a tape device that is attached to an AIX system, make sure that this device is not configured by the AIX generic tape driver. Use the system command "lsdev" to verify it as follows: "lsdev -Cs fcp | grep mt". The device cannot reset if the "RESETDrives" keyword for the UPDATE LIBRARY command is set to "No", device reset will not be attempted.

ANR89 74I Found new path for *path source name* and *target name* *old path name* *new path new path name*. Path information will be updated remotely.

Explanation

A new path has been found for the device on the library client or storage agent. Will try to update the path information on the library manager.

System action

.

User response

The path change may be caused by system reboot or cable swap or device addition or removal.

ANR89 75I Found new path for *path source name* and *target name* *old path name* *new path new path name*. Path information is updated.

Explanation

A new path has been found for the device and the path information has been updated.

System action

.

User response

The path change may be caused by system reboot or cable swap or device addition or removal.

ANR89 76E Unable to open special file *specialfile* for LUN reset with *errno = errno*.

Explanation

The special file created by the device driver for LUN reset purposes could not be opened by the server. This file should be created when the device driver is configured on the system

System action

LUN reset could not be started.

User response

Make sure that the special file exists and can be accessed by the server. If the device driver has not been completely configured with special files created for all devices, resolve the device driver configuration.

ANR89 77W The volume loaded into library *library name* did not have a valid label. Please load a scratch volume with a valid label.

Explanation

During normal operations a MANUAL library will prompt the user for the desired volume name if the volume does not have a valid label and the AUTOLABEL parameter is turned on. However, the utility mode of DUMPDB cannot prompt the user for a desired volume name.

System action

The server unloads the volume and asks for a new scratch volume with a valid label.

User response

The user needs to insert scratch volumes with valid labels or reissue the DUMPDB command and specify the desired volume name on the command line with the VOLUMENAMES parameter. See the DUMPDB documentation.

ANR89 78W The number of drives in library *library name* has been increased from *original drive count* to *new drive count*. Please restart the IBM Storage Protect server to update the configuration;

Explanation

The number of drives in the library has been increased. The new configuration will be recorded if IBM Storage Protect server is restarted.

System action

.

User response

Number of drives in the library has been increased. The user needs to restart the IBM Storage Protect server to capture the new configuration.

ANR89 79I Command: Operation for library *library name* started as process *process ID*.

Explanation

A scan library process has been started for the given library. The process is assigned the ID specified in the message.

System action

The server starts a background process to perform the operation in response

to the SCAN LIBRARY command entered by an administrator.

User response

To obtain status on the process, issue the QUERY PROCESS command. The process may be canceled with the CANCEL PROCESS command.

ANR89 80I SCAN LIBRARY process for library *library name* has been canceled.

Explanation

A background server process that has been working to scan the given library is canceled by the CANCEL PROCESS command.

System action

The server process is ended and server operation continues.

User response

None.

ANR89 81I Scanning for library *library name*.

Explanation

In response to a QUERY PROCESS command, this message displays the status for an SCAN LIBRARY process on the server.

System action

Server operation continues.

User response

None. The process may be canceled by an authorized administrator using the CANCEL PROCESS command.

ANR89 82E SCAN LIBRARY process for library *library name* failed.

Explanation

The background process for an SCAN LIBRARY command has failed.

System action

The background process ends.

User response

Make sure the library and drive devices associated with this command are powered on and ready, then reissue the command.

ANR89 83I SCAN LIBRARY process for library *library name* completed successfully.

Explanation

The background process for an SCAN LIBRARY command has completed successfully.

System action

The library has been scanned.

User response

None.

ANR89 84E The drive *drive name* in library *library name* is incapable of

performing any drive encryption operations.

Explanation

The server queried the drive's encryption capability, and the query failed or the query showed that the drive does not have encryption capabilities.

System action

The mount operation fails.

User response

If this message occurs on a scratch mount and drive encryption has not been utilized yet, you can turn drive encryption off by updating the DRIVEENCRYPTION parameter on the device class. Otherwise, verify your hardware configuration. First, verify that all the drives in this logical library support drive encryption. Second, verify that the device driver controlling all of the drives in this library also supports drive encryption. If both the drives and the device driver support drive encryption, call your drive hardware support.

ANR89 85E *The drive drive name in library library name is using an encryption method that is incompatible with the current server settings.*

Explanation

The server requires the drive to use various drive encryption methods based on the DRIVEENCRYPTION device class parameter for empty volumes or based on the previous encryption method used for filling volumes. The server is unable to properly handle the volume's encryption key without resolving this conflict.

System action

The mount operation fails.

User response

If this message occurs while mounting an empty volume the encryption method setup in your hardware environment is incompatible with the DRIVEENCRYPTION setting in your device class. Either update the device class or your hardware's encryption method such that these setting no longer conflict. If this message occurs while mounting a filling volume, either update your hardware configuration to the same method used while originally backing up this volume, which can be determined by the QUERY VOLUME FORMAT=DETAIL command, or update this volume's access to UNAVAILABLE.

ANR89 86E *The server currently doesn't allow AES encryption which is*

required for drive encryption support with the DRIVEENCRYPTION=ON parameter on the device class.

Explanation

Without AES encryption support the server cannot generate adequately strong enough encryption keys for drive encryption.

System action

The mount operation fails.

User response

Update the DRIVEENCRYPTION parameter on the device class to a value other than ON.

ANR89 87W *The server will not encrypt the volume volume name.*

Explanation

Drive encryption with the device class parameter setting of DRIVEENCRYPTION=ON will only encrypt storage pool volumes. Thus, backupsets, DB backups, and export volumes will not be encrypted.

System action

The mount continues, but encryption is not used.

User response

If encryption is needed for this volume or other backupsets, DB backups, or export volumes, use a different method of

encryption: use a device class parameter of DRIVEENCRYPTION=ALLOW and a hardware method of 'Library' or 'System' (do not use the 'Application' method).

ANR89 88W *Library Library Name failed to relabel volume Volume Name after it returned to scratch.*

Explanation

The RELABELSCRATCH option is enabled, and while attempting to relabel the volume the operation failed.

System action

None.

User response

This warning may be issued if the relabeling operation attempts to relabel the same volume as another library volume operation: LABEL LIBVOLUME, CHECKIN LIBVOLUME, CHECKOUT LIBVOLUME, or another relabeling operation. For example, suppose two relabeling operations run on the same volume. If the first relabeling operation succeeds and the second operation fails, no action is required.

Verify the volume is still checked into the library with the QUERY LIBVOL command. If it is not checked in, use LABEL LIBVOL or CHECKIN LIBVOL to check the volume back into the library.

ANR89 89E Unable to establish a communication session with the primary library manager.

Explanation

The requested operation required that a communication session be established with a library manager. The library manager was found to be unavailable at this time.

System action

None.

User response

Verify the primary library manager is up and operational. Once the server is verified to be operational, retry the operation.

ANR89 90E Device Device Name is not supported by the IBM Storage Protect server.

Explanation

The device product identification is not recognized by the IBM Storage Protect server.

System action

None.

User response

Determine if the installed level of the server supports the device. See the device support web page for Linux systems at [IBM Storage Protect Supported Devices for Linux](#) or the device

support page for all other systems at [IBM Storage Protect Supported Devices for AIX, HP-UX, Solaris, and Windows](#).

If the device is a tape drive and is not supported, you can use it with the generic tape format. To use the drive, specify GENERICTAPE=Yes when defining a path to the drive. If the device is supported and this message is received, search the IBM Storage Protect Support Web site for known solutions:

[IBM Storage Protect product documentation](#)

If no solution is found, report the issue to IBM Storage Protect Support.

ANR89 91E The GENERICTAPE format is not supported with drive Device Name.

Explanation

The device driver does not support all features required for the GENERICTAPE format.

System action

None.

User response

Make sure the tape drive is controlled by the native device driver. The IBM Storage Protect device driver does not support the generic tape format. If the drive is controlled by the IBM Storage Protect device driver and you intend to use the IBM Storage

Protect tape format with the drive, do not specify GENERICTAPE=Yes when defining a path to the drive.

ANR89 92E The library state refresh for library name failed.

Explanation

The operation to re-initialize the library's state failed.

System action

None.

User response

To refresh the library state, halt and restart the IBM Storage Protect server.

ANR89 93I The library state refresh for library name was successful.

Explanation

The server successfully re-initialized the library's state.

System action

None.

User response

None.

ANR89 94W Append-only mode is not supported on tape drive Drive Name.

Explanation

The server attempted to enable append-Only mode on the tape drive. However, the tape drive

does not support append-Only mode. In virtual tape libraries, some drives do not support append-only mode.

System action

System operation continues, but the server does not enable append-only mode.

User response

If the tape drive is in a virtual library, see the documentation from the virtual library vendor to determine whether the tape drive supports append-only mode.

ANR89 95E Unable to write to volume Volume Name in drive Drive Name.

Explanation

The server is unable to write to the volume because the drive is in append-only mode and the volume is write-protected.

System action

The server will dismount the volume and continue processing with another volume.

User response

Contact your service representative for assistance.

ANR89 96W The server is unable to query or enable append-only mode on tape drive Drive Name.

Explanation

The server was unable to query or enable append-only mode because the tape drive does not support append-only mode or there is a hardware error in the drive.

System action

System operation continues, but the server does not query or enable append-only mode for the tape drive during this mount operation.

User response

If the tape drive is in a virtual library, see the documentation from the virtual library vendor to determine whether the drive supports append-only mode. If the tape drive does not support append-only mode, contact the tape drive vendor for assistance. If you want to use append-only mode and the tape drive supports append-only mode, complete the following steps: 1. Specify the CHECKTAPEPOS server option and select either the YES or DRIVEONLY parameter values. 2. Retry the mount operation. The server will attempt to enable append-only mode the next time a volume is mounted. 3. If the issue persists, contact the tape drive vendor for assistance. If this is a tape drive in a physical library, see any error messages related to the hardware in the server activity log file.

ANR89 97W The current version of the device driver for drive *Drive Name* is *Driver Version*. To enable append-only mode, version *Required Version* or later is required.

Explanation

The device driver for the drive does not meet the version requirement to support append-only mode.

System action

The server will not enable append-only mode on the tape drive for data overwrite protection.

User response

Upgrade the device driver for the drive to the required version.

ANR89 98W Encryption has been disabled for drive *drive name* in library *library name*.

Explanation

The server determined that the drive's encryption method was Application Managed Encryption (AME). Since the server is assumed responsibility for encryption settings when device class uses DRIVEENCRYPT=ALLOW and the drive uses AME, encryption has been disabled.

System action

The mount continues with encryption disabled.

User response

If encryption is intended to be used for this operation, with IBM Storage Protect managing the encryption keys, then the DRIVEENCRYPT parameter should be set to ON. If encryption is intended to be used for this operation, without IBM Storage Protect managing the encryption keys (for example, NEC, Fujitsu, and SpectraLogic provide AME encryption solutions without IBM Storage Protect managing encryption), then the DRIVEENCRYPT parameter should be set to EXTERNAL. In either of these situations, data on the volume used in this operation will need to be moved to a new volume with the correct settings to encrypt the data.

ANR89 99E Directory name *directory name* has been duplicated in *parameter* command.

Explanation

When defining or updating multiple directories for a device class, you can only specify a directory name once in the command.

System action

The command fails. The server continues.

User response

Ensure that the directory name is specified only once in the command.

ANR90 00E Drive *drive name* does not support logical block protection.

Explanation

The LBPROTECT parameter associated with the device class is set to enable logical block protection. However, the tape drive does not support logical block protection.

System action

The mount operation fails.

User response

Update drive firmware to the level that supports logical block protection.

ANR90 01W Volume *volume name* does not have logical block protection.

Explanation

The server cannot enable logical block protection for this volume. Data that is already on the volume does not have logical block protection, or the media type is not compatible with logical block protection.

System action

The operation will continue without logical block protection enabled on the volume.

User response

If the media type supports logical block protection, mark the volume access to READONLY so that the server cannot write to the volume.

ANR90 02E The version of the device driver for drive *Drive Name* is *Driver Version*. Driver version *Required Version* or later is required for logical block protection.

Explanation

The device driver for the drive does not meet the version requirement for logical block protection.

System action

The mount operation fails.

User response

Upgrade the device driver for the drive to the required version.

ANR90 03E The block CRC validation failed on volume *volume name* in drive *drive name*.

Explanation

The data block was corrupted while it was transferred to or from the drive.

System action

The operation fails.

User response

Restart the operation to try the volume in a different drive. If the problem persists, check the hardware connections and the tape drive.

ANR90 04E The server detected that drive *drive name* can also be accessed by other applications by using the *st* device special file that is associated with device *device name*. You must delete all *st* device special files for this tape drive.

Explanation

When more than one device driver can access a drive, tape labels or other data can be overwritten. To prevent possible data integrity issues, you must delete all *st* device special files for this tape drive. Tip: An *st* device special file is a file that is associated with a generic Small Computer System Interface (SCSI) tape driver.

System action

The operation fails or the drive is temporarily taken offline and is unavailable for tape operations. The server polls the drive at 30-second intervals to verify that *st* device special files for the tape drive are deleted. After all files are deleted, the drive is brought back online.

User response

To resolve the issue, take one of the following actions:

- If you do not need to use the *st* driver, you can unload the *st* driver from the kernel by issuing the following Solaris operating system command: `rem_drv st`
- If you want the *mt* driver and the *st* driver to coexist on the Solaris system, you must run the `autoconf` utility to configure the devices on the Solaris system. The `autoconf` utility ensures that all non-IBM tape devices have only one device file, which is created by the *mt* driver. Tip: An *mt* driver is a driver that is associated with a tape device.
- Log in with the root user ID, and run the `rmstdev` utility with the `-d` option. The `rmstdev` utility is located in the following directory: `/opt/tivoli/tsm/server/bin` or `/opt/tivoli/tsm/StorageAgent/bin`

The `rmstdev` utility deletes all device files that were created by the *st* driver for all non-IBM tape devices in the storage environment.

ANR90 05E Command: Library *library name* has an active relabel process and can not be deleted.

Explanation

The designated library can not be deleted or updated because it is currently in use for a relabel operation.

System action

The command is not processed.

User response

Wait until the relabel operation completes, and then retry the command.

ANR90 06E Tape volumes must be physically removed from an ACSLS cartridge access port (CAP).

Explanation

Tape volumes are located in the ACSLS CAP. The ACSLS server requires users to physically remove these volumes from the CAP within 30 minutes. When `REMOVE=YES` is set for the `CHECKOUT LIBVOLUME` command, a tape ejection operation is scheduled. If the user fails to remove the tape from the CAP within 30 minutes, the ACSLS server sets a failure status for the tape ejection operation.

System action

The ACSLS library ejected tape volumes and relocated them to a CAP.

User response

Remove the volumes from the CAP. If there are no tape cartridges in the CAP, check the ACSLS library to ensure that no tapes are lodged there.

ANR90 07E Command: The library cartridge access port (CAP) ID is

invalid for
library *library*
name.

Explanation

Tape volumes were not ejected from the ACSLS library because the library CAP ID was not specified in the CHECKOUT LIBVOLUME command. By default, all CAPs initially have a priority value of 0, which means that the ACSLS server does not automatically select a CAP.

System action

The system failed to eject the tape volumes.

User response

To verify the CAP priority value, issue the QUERY CAP command. If the priority value is 0, reissue the CHECKOUT LIBVOLUME command with a CAP ID. Alternatively, set the CAP priority to a non-zero value and reissue the CHECKOUT LIBVOLUME command.

ANR90 08E Unable to determine the drive type for Device of type Device Inquiry String.

Explanation

The drive could not be opened. This version of IBM Storage Protect may not support the drive type.

System action

The system failed to identify the drive type.

User response

Verify that the drive type is supported. See the device support web page for Linux systems at [IBM Storage Protect Supported Devices for Linux](#) or the device support page for all other systems at [IBM Storage Protect Supported Devices for AIX, HP-UX, Solaris, and Windows](#).

ANR90 09E The cartridge access port (CAP) for library *library name* is not available. The CAP status is *cap status*.

Explanation

An error occurs in the CAP while accessing the specified library.

System action

The operation fails.

User response

Ensure that the CAP is empty, all tape volumes are removed from the CAP, and the CAP door is closed.

ANR90 10W Unable to verify drive *drive name*.

Explanation

The mount operation fails because the SANDISCOVERY option is not enabled. Therefore, the SAN discovery function did not verify

whether the specified drive must be opened.

System action

The SAN discovery function is not turned on.

User response

Verify the SANDISCOVERY option value in the dsmserv.opt file. If the value is set to OFF or UNSCANNEDPATHOFF, change the value to ON.

ANR90 11E Position error: the volume *volume name* in drive *drive name* is not at the expected *expected position* : The actual volume position is: *expected volume position*.

Explanation

The CHECKTAPEPOS server option has determined that there is a volume position error IBM Storage Protect has not repositioned the tape. Writing is halted to prevent data loss.

System action

The write operation fails.

User response

See the IBM Storage Protect documentation about preventing tape label overwrites in the IBM Knowledge Center at <http://www.ibm.com/support/knowledgecenter/SSGSG7>.

ANR90 12E There is no drive available for the database restore operation for device class *device class name*.

Explanation

The database restore operation cannot be completed. There are no available mount points. Possible reasons include:

- The device configuration file is not correctly defined to access the media.
- There is a problem with the media.

System action

The database restore operation fails.

User response

Review the information in the message explanation and take action to correct any problems with the device configuration file or media. Reissue the RESTORE DB command.

ANR90 13W The RESETDRIVES parameter was not specified for library *library name*. For this reason, the server cannot access tape drives that are reserved by another server in the specified library.

Explanation

If a reservation conflict occurs in a failover

cluster or a shared library environment, the server cannot access tape drives that are already reserved by another server. To ensure that the server can clear a tape drive reservation, the RESETDRIVES=YES parameter must be specified.

System action

System operation continues, but the server cannot access the tape drives that are reserved by another server in the failover cluster or shared library environment.

User response

Issue the UPDATE LIBRARY command and set the RESETDRIVES parameter to YES. If you are in a failover cluster environment, set the RESETDRIVES parameter to YES when the SHARED parameter for the library is set to NO (default value). If you are in a shared library environment, set the RESETDRIVES parameter to YES when the SHARED parameter is set to YES. Tip: To determine the value of the SHARED parameter, issue the following command: query library library_name f=d where library_name specifies the name of the library. For tape drives reserved by a SCSI-2 reserve, the RESETDRIVES=YES parameter must be specified to enable a LUN reset to clear the reservation. A LUN reset is required only in an IBM AIX or Microsoft Windows environment.

For tape drives reserved by a SCSI-3 persistent reserve, the RESETDRIVES=YES parameter must be specified to preempt or clear the reservation.

ANR90 14E Volume *volume name* is incompatible with drive *drive name*.

Explanation

The drive cannot read the volume format. This can be attributed to a different generation media format or an encrypted tape.

System action

The operation fails.

User response

Make sure that the volume is correctly formatted for this drive, and validate the device class settings for this operation. If it is encrypted, the drive must be configured to decrypt the cartridge.

ANR90 15E The device *device name* path symlink appears to be circular.

Explanation

When the server attempts to validate the device path the symlink is too long.

System action

A server cannot access the device due to a device symlink problem.

User response

Issue the autoconf script to re-establish the links.

ANR90 16W Process *process number*: AUDIT LIBVOLUME for volume *volume name* in library *library name* cannot be cancelled.

Explanation

If you use the AUDIT LIBVOLUME command to audit a volume in a specific library, you cannot cancel a background server process by using the CANCEL PROCESS command. You cannot cancel the background server process because of a tape firmware limitation when you run the AUDIT LIBVOLUME command.

System action

The background server process continues.

User response

None.

ANR90 17I Command: Operation for volume *volume name* in library *library name* started as process *process ID*.

Explanation

A volume audit process is in progress for a specific library. The process is assigned the ID that is specified in the message.

System action

When you run the AUDIT LIBVOLUME command, the server starts the volume audit process.

User response

Issue the QUERY PROCESS command to display information about background processes.

ANR90 18E AUDIT LIBVOLUME for volume *volume name* in library *library name* failed.

Explanation

The background process for an AUDIT LIBVOLUME command failed.

System action

The background process ends, but the volume is not audited.

User response

Ensure that the library and the drive devices that are associated with the AUDIT LIBVOLUME command are turned on, and run the command again.

ANR90 19I AUDIT LIBVOLUME for volume *volume name* in library *library name* completed successfully.

Explanation

The AUDIT LIBVOLUME process completed successfully.

System action

None.

User response

None.

ANR90 20E You cannot issue the AUDIT LIBVOLUME command by using the drive *drive name* for volume *volume name* in library *library name*.

Explanation

The background process for the AUDIT LIBVOLUME command failed. You cannot issue the AUDIT LIBVOLUME command by using the specified type of drive.

System action

The background process ends and but the volume is not audited.

User response

Issue the AUDIT LIBVOLUME command on a library that has any of the following tape drives:
- IBM 3592 generation 4 drive or later - IBM LTO generation 5 drive or later

ANR90 21I Auditing volume *volume name* from library *library name* with process *process ID* uses drive *drive name*.

Explanation

When the IBM Storage Protect server locates a drive to process the AUDIT LIBVOLUME

command, a status message is displayed.

System action

The AUDIT LIBVOLUME background process operation continues.

User response

None.

ANR90 22E Volume *volume name* could not be mounted for the AUDIT LIBVOLUME command because all of the drives are in use in library *library name*.

Explanation

The background process for the AUDIT LIBVOLUME command fails.

System action

The background process ends. The volume is not audited.

User response

Ensure that a drive is available before you issue the AUDIT LIBVOLUME command. You can dismount an idle volume in a tape drive or wait until a drive is available before you issue the command again.

ANR90 23E The AUDIT LIBVOLUME command failed for drive *drive name* with the current tape device *driver version current driver version*. Use driver

version supported driver version and above to issue the AUDIT LIBVOLUME command.

Explanation

The background process for a AUDIT LIBVOLUME command fails.

System action

The background process ends, but the volume has not been audited.

User response

Install a supported drive version and try the command again.

ANR90 24E There are no drives available.

Explanation

The server cannot find any valid drives. In most cases, this prevents client nodes from accessing the drives.

System action

The operation fails.

User response

If any drives or paths are offline, use the UPDATE DRIVE or UPDATE PATH commands to bring them back online.

ANR90 25E There are no available NAS drives attached to the required node of a NAS cluster.

Explanation

The server cannot find any valid drives for the NAS operation. In most cases, this prevents a NAS clustered node from accessing the drives.

System action

The operation fails.

User response

If any drives or paths are offline, use the UPDATE DRIVE or UPDATE PATH commands to bring them back online. For a clustered NAS device, verify that a path is defined using the correct device name. For a drive attached to a clustered NAS device, the device name contains the node name within the cluster in which the device is attached.

ANR95 79W Command: The *file file name* (Linux) cannot be found.

Explanation

The specified file cannot be found.

System action

For the default server executable file, the PREPARE command uses /opt/IBMads-m-s/bin/dsmserve.

User response

Determine why the file does not exist and create it if necessary.

ANR95 80W Command: Generated (Linux) replacement volume name

volume name may not be a valid raw partition name. Original volume name: volume name. Stanza is stanza name.

Explanation

Appending the replacement volume name postfix to the original volume name has created a name that may not be a valid raw partition name.

System action

Replacement volume name is used in the recovery plan stanza.

User response

Manually update the generated recovery plan stanza with a legal replacement name. The replacement name can be another raw partition name or a regular file name.

ANR95 command:
81W Volume file (Linux) name not found while building stanza recovery plan stanza name.

Explanation

This volume is defined to the server but does not exist. The device class associated with the volume is DISK or the device class device type is FILE.

System action

The entry for the volume is not included in the recovery plan stanza.

User response

Determine why file does not exist; create if necessary.

ANR95 command:
82E Generated file (Linux) name too long. Length of directory or prefix 'prefix' plus 'name' exceeds maximum characters characters.

Explanation

The file name generated is too long. The maximum valid length is shown in the message.

System action

The recovery plan file was not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPLANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR95 command:
83E Cannot generate (Linux) fully qualified file name for 'name'.

Explanation

A failure occurred expanding the specified file name.

System action

Recovery plan file not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPLANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR95 command:
84E Cannot generate (Linux) server options file name.

Explanation

A failure occurred generating the server options file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR95 command:
85E Cannot generate (Linux) a volume history file name.

Explanation

A failure occurred generating the volume history file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR95 command:
86E Cannot generate (Linux) a device configuration file name.

Explanation

A failure occurred generating the device configuration file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Invalid 00E information (AIX) passed to NETLS license interface.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 01E (AIX) The NETLS license interface was not initialized properly.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 02E (AIX) Invalid JOB information passed to the NETLS Interface.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for

assistance in resolving the error.

ANR96 03E (AIX) The NETLS Nodelock file could not be created.

Explanation

The server was not able to create the file /usr/lib/netls/conf/nodelock which is used for storing license password information.

System action

Server operation continues. New licensing information is not used by the server.

User response

If the server is not running with root authority, make sure that directory authorities in the /usr/lib/netls/conf path are set so that the user ID under which the server is running can create, read, and write to the /usr/lib/netls/conf/nodelock file. If the server is running with root authority, contact your service representative for assistance in resolving this problem.

ANR96 04E (AIX) The NETLS license interface encountered an internal error.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 05E (AIX) An invalid vendor ID was passed to NETLS.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 06E (AIX) NETLS failed to find socket families to contact a server.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 07E (AIX) No NETLS Servers found.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 08E (AIX) A NETLS Security Breach was encountered.

Explanation

The server licensing functions encountered an internal error in accessing license information for the server storage capacity and number of registered clients.

System action

Server operation continues. New licensing information is not used by the server.

User response

Contact your service representative for assistance in resolving the error.

ANR96 09E (AIX) Incorrect license entered: Password entered = *password* Annotation entered = *annotation*.

Explanation

The license information entered for a REGISTER LICENSE command is not correct.

System action

None.

User response

Register the license again with the REGISTER LICENSE command. Be sure to correctly enter the license information.

ANR96 10E (AIX) Unable to create directory: directory.

Explanation

The REGISTER LICENSE command is unable to either create or verify the specified directory structure.

System action

None.

User response

If the server is not running with root authority, make sure that directory authorities in the /usr/lib/netls/conf path are set so that the user ID under which the server is running can create, read, and write to the /usr/lib/netls/conf/nodelock file. If the server is running with root authority, contact your service representative for assistance in resolving this problem.

ANR96 10E (Linux) Unable to create directory: directory.

Explanation

The REGISTER LICENSE command is unable to either create or verify the specified directory structure.

System action

None.

User response

If the server is not running with root authority, make sure that directory authorities in the given directory path are set so that the user under which the server is running can create, read, and write to the server's license file. If the server is running with root authority, contact your service representative for assistance in resolving this problem.

ANR96 11E (AIX) Unable to open NODELOCK file: file.

Explanation

The REGISTER LICENSE command is unable to either create or open the nodelock file.

System action

None.

User response

If the server is not running with root authority, make sure that directory authorities in the /usr/lib/netls/conf path are set so that the user ID under which the server is running can create, read, and write to the /usr/lib/netls/conf/nodelock file. If the server is running with root authority, contact your service representative for assistance in resolving this problem.

ANR96 12E (AIX) Error writing to NODELOCK file.

Explanation

The REGISTER LICENSE command fails writing to the nodelock file.

System action

None.

User response

If the server is not running with root authority, make sure that directory authorities in the /usr/lib/netls/conf path are set so that the user ID under which the server is running can create, read, and write to the /usr/lib/netls/conf/nodelock file. If the server is running with root

authority, contact your service representative for assistance in resolving this problem.

ANR96 13W (AIX) Error loading modname for Licensing function.

Explanation

The server cannot load file module *modname* to initialize licensing functions.

System action

Server operation continues. Default licensing values are in effect for running the server.

User response

The dsmreg.lic module is accessed as part of the load process for licensing. It should be in the same directory as the dsmserv executable or it must be in a directory that is pointed to by the DSMSEV_DIR environment variable. The dsmreg.lic module is only installed when you purchase the product.

ANR96 13W (Linux) Error loading modname for Licensing function.

Explanation

The server cannot load file module *modname* to initialize licensing functions.

System action

Server operation continues. Default licensing values are in

effect for running the server.

User response

dsmreg.lic is accessed as part of the load process for licensing. It should be in the same directory as the dsmserv executable file or it must be in a directory that is pointed to by the DSMSEV_DIR environment variable. The dsmreg.lic module is only installed when you purchase the product.

ANR96 Unable to open 14E license file: file. (AIX)

Explanation

The REGISTER LICENSE command is unable to create or open the server license file.

System action

None.

User response

Make sure that the user ID under which the server is running has the authority required to create or write, or both, to the license file in the directory in which the server is running. If this does not resolve the problem, contact your service representative for assistance.

ANR96 Unable to open 14E license file: file. (Linux)

Explanation

The REGISTER LICENSE command is unable to either create or open the server license file.

System action

None.

User response

Make sure that the user ID under which the server is running has the authority required to create or write, or both, to the license file in the directory in which the server is running. If this does not resolve the problem, contact your service representative for assistance.

ANR96 Error writing to 15E admserv.licenses file. (AIX)

Explanation

The REGISTER LICENSE command fails writing to the server license file.

System action

None.

User response

Make sure that the user ID under which the server is running has the authority required to create or write, or both, to the license file in the directory in which the server is running. Also, ensure that free space is available in the file system so that the license information can be written to the file. If this does not resolve the problem, contact your service representative for assistance.

ANR96 Error writing to 15E admserv.licenses file. (Linux)

Explanation

The REGISTER LICENSE command fails writing to the server license file.

System action

None.

User response

Make sure that the userid under which the server is running has the authority required to create and/or write to the license file in the directory in which the server is running. Also ensure that there is free space available in the filesystem so that the license information can be written to the file. If this does not resolve the problem contact your service representative for assistance.

ANR96 Invalid license 16I record record value found in license file - it will be skipped. (AIX)

Explanation

The license manager found an invalid record in the server license file (admserv.licenses). The record is ignored.

System action

The invalid record is ignored.

User response

Erase the admserv.licenses file and reregister your licenses.

ANR96 Invalid license 16W record record value found in (Linux)

license file - it will be ignored.

Explanation

The license manager found an invalid record in the server license file (admserv.licenses). The record is ignored.

System action

The invalid record is ignored.

User response

Erase the admserv.licenses file and reregister your licenses. Refer to the licenses provided to you to ensure that only valid licenses are specified with the REGISTER LICENSE command.

ANR96 Invalid license 17I authorization: authorization string. (AIX)

Explanation

The license authorization specified for a REGISTER LICENSE command is not valid.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

Examine the license authorization string that was entered with the REGISTER LICENSE command. Reenter the command if the license authorization was not specified correctly. If the

license authorization has been specified correctly, contact your service representative.

ANR96 Invalid license 17W authorization: (Linux) authorization string.

Explanation

The license authorization specified for a REGISTER LICENSE command is not valid.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

Examine the license authorization that was entered using the REGISTER LICENSE command. Reenter the command if the license authorization was not specified correctly. If the license authorization has been specified correctly, contact your service representative.

ANR96 License 18E registration is (AIX) not supported on this server.

Explanation

The REGISTER LICENSE command fails because the license authorization module cannot be found.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

The license authorization file is required for formal licensing for the AIX/6000 server. The file is delivered when the product is purchased, but it is not available in the product service stream or with demonstration copies of the server. If you have purchased the server, contact your service representative for assistance in resolving this problem.

ANR96 License 18E registration is (Linux) not supported on this server.

Explanation

The REGISTER LICENSE command failed because the license authorization module could not be found.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

The license authorization file is required for formal licensing for the server. The file is delivered when the product is purchased, but is not available in the product service stream or with demonstration copies of the server. If you have purchased the server, please contact your service representation for assistance in resolving this problem.

ANR96 An EVALUATION 22I LICENSE for (AIX) support of IBM Storage Protect for Space Management will expire on expiration date.

Explanation

The AIX/6000 server is distributed with an evaluation license for IBM Storage Protect for Space Management support. If no formal license is found for the server and the evaluation period has not lapsed, this message is displayed each time the server checks the server license terms.

System action

The IBM Storage Protect for Space Management license allows clients to utilize the server for storing files migrated during space management. The server checks this license when files are migrated to the server from client nodes to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support IBM Storage Protect for Space Management after the expiration date shown.

ANR96 An EVALUATION 23I LICENSE for (AIX) support of disaster recovery manager will expire on expiration date.

Explanation

The AIX/6000 server is distributed with an evaluation license for disaster recovery manager support. If no formal license is found for the server and the evaluation period has not lapsed, this message is displayed each time the server checks the server license terms.

System action

The disaster recovery manager license allows customers to store information in the server regarding machines and recovery media, allows management of offsite recovery media, collects and stores information in the server for server recovery and allows data base and storage pool backups to a device class of type server. The server checks this license when machines or recovery media are defined to the server, when PREPARE or MOVE DRMMEDIA are invoked and when a data base backup or storage pool backup to a device class of type server are performed to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service

representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support disaster recovery manager after the expiration date shown.

ANR96 24E (AIX) Unexpected error encountered in iFor/LS (SystemView License Use Management) routine license interface name status=xreported status code.

Explanation

The server encountered an unexpected error in accessing the SystemView License Use Management function specified.

System action

The server license monitoring operation fails

User response

The SystemView License Use Management product is installed during normal AIX server installation. Check to make sure that server was installed correctly. If the installation was successful, re-boot your AIX system and re-start the server. If this message continues to be issued, contact your service representative.

ANR96 24I (Linux) An EVALUATION LICENSE for support of IBM Storage Protect

for Space Management will expire on expiration date.

Explanation

The server is distributed with an evaluation license for IBM Storage Protect for Space Management support. If no formal license is found for the server and the evaluation period has not lapsed, this message is displayed each time the server checks the server license terms.

System action

The IBM Storage Protect for Space Management license allows clients to utilize the server for storing files migrated during space management. The server checks this license when files are migrated to the server from client nodes to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support IBM Storage Protect for Space Management after the expiration date shown.

ANR96 24I (Windows) An EVALUATION LICENSE for support of IBM Storage Protect for Space Management

will expire on expiration date.

Explanation

The server is distributed with an evaluation license for IBM Storage Protect for Space Management support. If no formal license is found for the server and the evaluation period has not lapsed, this message is displayed each time the server checks the server license terms.

System action

The IBM Storage Protect for Space Management license allows clients to utilize the server for storing files migrated during space management. The server checks this license when files are migrated to the server from client nodes to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support IBM Storage Protect for Space Management after the expiration date shown.

ANR96 25E (AIX) Could not open file file name.

Explanation

The server could not open the license certificate file specified.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 25I (Linux) An EVALUATION LICENSE for support of disaster recovery manager will expire on expiration date.

Explanation

The server is distributed with an evaluation license for disaster recovery manager support. If no formal license is found for the server, and the evaluation period has not lapsed, this message is displayed each time the server checks the server license terms.

System action

The disaster recovery manager license allows customers to store information in the server regarding machines and recovery media, allows

management of offsite recovery media, collects and stores information in the server for server recovery, and allows data base and storage pool backups to a device class of type server. The server checks this license when machines or recovery media are defined to the server, when PREPARE or MOVE DRMMEDIA are invoked, and when a data base backup or storage pool backup to a device class of type server are performed to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support disaster recovery manager after the expiration date shown.

ANR96 25I (Windows) An EVALUATION LICENSE for support of disaster recovery manager will expire on expiration date.

Explanation

The server is distributed with an evaluation license for disaster recovery manager support. If no formal license is found for the server and the evaluation period has not lapsed, this message is displayed each time the

server checks the server license terms.

System action

The disaster recovery manager license allows customers to store information in the server regarding machines and recovery media, allows management of offsite recovery media, collects and stores information in the server for server recovery and allows data base and storage pool backups to a device class of type server. The server checks this license when machines or recovery media are defined to the server, when PREPARE or MOVE DRMMEDIA are invoked and when a data base backup or storage pool backup to a device class of type server are performed to ensure that the server is licensed to perform this function.

User response

If you are interested in using the server, contact your service representative to obtain formal licenses for the server before the evaluation period has elapsed. Without formal licenses, the server will not support disaster recovery manager after the expiration date shown.

ANR96 26E (AIX) Invalid license certificate file: file name.

Explanation

The specified file does not contain valid license certificate information.

System action

The license registration command ignores the contents of the file.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 27E (AIX) Cannot access node license lock file: file name.

Explanation

The server was not able to access the specified file. The node lock file contains licensing information for the server.

System action

The license function fails.

User response

Examine the file specification displayed and ensure that the file attributes will allow the server to access the file. The location of the file is either in the directory from which the server is started, or in the directory specified by the DSMSEV_DIR environment variable. Re-specify the DSMSEV_DIR environment variable if this specification is in error. Also ensure that

there is sufficient space on the drive specified for the file. If the problem persists after these corrections have been made, contact your service representative.

ANR96 28E (Windows) Unexpected error encountered in iFor/LS (SystemView License Use Management) routine license interface name status=xreported status code.

Explanation

The server encountered an unexpected error in accessing the SystemView License Use Management function specified.

System action

The server license monitoring operation fails

User response

The SystemView License Use Management product is installed during normal server installation. Check to make sure that the product was installed correctly. If the installation was successful, re-boot your system and re-start the server. If this message continues to be issued, contact your service representative.

ANR96 29E (Windows) Could not open file file name.

Explanation

The server could not open the license certificate file specified.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

**ANR96 Invalid license
30E certificate file:
(Windows) file name.**

Explanation

The specified file does not contain valid license certificate information.

System action

The license registration command ignores the contents of the file.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found,

contact your service representative.

**ANR96 Cannot access
31E node license
(Windows) lock file: file
name.**

Explanation

The server was not able to access the specified file. The node lock file contains licensing information for the server.

System action

The license function fails.

User response

Examine the file specification displayed and ensure that the file attributes will allow the server to access the file. The location of the file is either in the directory from which the server is started, or in the directory specified by the DSMSEV_DIR environment variable. Re-specify the DSMSEV_DIR environment variable if this specification is in error. Also ensure that there is sufficient space on the drive specified for the file. If the problem persists after these corrections have been made, contact your service representative.

**ANR96 Cannot load
32I licensing DLL
(Windows) library: DLL file
name : the
server will
assume
evaluation
licensing mode.**

Explanation

The server was not able to load the specified dynamic link library.

System action

Server licensing assumes Try and Buy mode with licenses for 180 days.

User response

The named DLL library(ies) are required for the server to support feature licensing. If you are running an evaluation copy of the server, this message should not cause concern and is normal. If the libraries are installed and this message continues to be issued, contact a support representative for assistance.

**ANR96 command name:
34E No license
(AIX) certificate files
were found with
the file name
specification
specification.**

Explanation

The server did not find any license certificate file(s) with the file name specification entered.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. The

file name specification indicates the fully qualified file name the server was trying to read. The directory used to locate the license certificate files when no explicit path is provided is determined as follows:

- The directory path pointed by the environmental variable DSMSEV_DIR if this variable is defined
- The current working directory of the server process if the DSMSEV_DIR variable is not defined

If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

**ANR96 command name:
34E No license
(Linux) certificate files
were found with
the file name
specification
specification.**

Explanation

The server did not find any license certificate file(s) with the file name specification entered.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the

corrected specification. If an error cannot be found, contact your service representative.

ANR96 command name:
34E No license
(Windows) certificate files
were found with
the file name
specification
specification.

Explanation

The server did not find any license certificate file(s) with the file name specification entered.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 Invalid license
35E certificate file:
(Linux) file name.

Explanation

The specified file does not contain valid license certificate information.

System action

The license registration command ignores the contents of the file.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 Invalid license
35E certificate file:
(Windows) file name.
ws)

Explanation

The specified file does not contain valid license certificate information.

System action

The license registration command ignores the contents of the file.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 Could not open
36E file file name.
(Linux)

Explanation

The server could not open the license certificate file specified.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 Could not open
36E file file name.
(Windows)
ws)

Explanation

The server could not open the license certificate file specified.

System action

The license registration command fails.

User response

Examine the file specification entered, including wildcard characters, to determine if it names the license certificate file(s) you intended to use. If an error is found, re-try the command with the corrected specification. If an error cannot be found, contact your service representative.

ANR96 Cannot access
37E node license
(Linux) lock file: file
name.

Explanation

The server was not able to access the specified file. The node lock file contains licensing information for the server.

System action

The license function fails.

User response

Examine the file specification displayed and ensure that the file attributes will allow the server to access the file. The location of the file is either in the directory from which the server is started, or in the directory specified by the DSMSEV_DIR environment variable. Re-specify the DSMSEV_DIR environment variable if this specification is in error. Also ensure that there is sufficient space on the drive specified for the file. If the problem persists after these corrections have been made, contact your service representative.

ANR96 Cannot access
37E node license
(Windows) lock file: file
ws) name.

Explanation

The server was not able to access the specified file. The node lock file contains licensing information for the server.

System action

The license function fails.

User response

Examine the file specification displayed and ensure that the file attributes will allow the server to access the file. The location of the file is either in the directory from which the server is started, or in the directory specified by the DSMSEV_DIR environment variable. Re-specify the DSMSEV_DIR environment variable if this specification is in error. Also ensure that there is sufficient space on the drive specified for the file. If the problem persists after these corrections have been made, contact your service representative.

ANR96 License 38W registration is (Linux) not supported on this server.

Explanation

The REGISTER LICENSE command fails because the license authorization module cannot be found.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

The license authorization file is required for formal licensing for the server. The file is delivered when the product is purchased, but it is not available in the product service stream or with demonstration copies of the server.

If you have purchased the server, contact your service representative for assistance in resolving this problem.

ANR96 License 38W registration is (Windows) not supported on this server.

Explanation

The REGISTER LICENSE command fails because the license authorization module cannot be found.

System action

Server operation continues; licensing terms are not changed by the REGISTER LICENSE command.

User response

The license authorization file is required for formal licensing for the Windows server. The file is delivered when the product is purchased, but it is not available in the product service stream or with demonstration copies of the server. If you have purchased the server, contact your service representative for assistance in resolving this problem.

ANR96 Unable to load 39W Shared License (Linux) File shared library.

Explanation

The server was unable to load the shared library.

System action

Server operation continues, but functions

that require the shared library will be inoperative.

User response

Make sure the shared library is accessible/readable. This message is normal for those servers in the Try-N-Buy mode.

ANR96 Unable to load 40E procedure (Linux) address from shared library shared library license module.

Explanation

The server module is unable to load the address of a routine in the indicated shared library for license loading.

System action

Server operation continues, but the function that requires the shared library will be inoperative.

User response

Ensure that the shared library is accessible. If the problem persists, contact your Customer Service Representative.

ANR96 One or more 41W EVALUATION (Linux) LICENSES will expire on expiration date.

System action

Server operation continues.

User response

Halt the server and erase the nodelock file in the server startup directory. After

restarting the server, use the REGISTER LICENSE command to define the licensed features that you have purchased with your server. These licenses should NOT have an expiration date, so this message should not appear after re-registering the proper licenses. If this message persists, contact your service representative.

ANR96 The specified 42E license (Linux) authorization code (license authorization code) is invalid.

Explanation

The license authorization code which you entered using the REGISTER LICENSE command is invalid.

System action

No additional licenses are registered. Server operation continues.

User response

Obtain a valid license authorization code and try the command again.

ANR96 The specified 42E license (Windows) authorization code (license authorization code) is invalid.

Explanation

The license authorization code which you entered using the REGISTER LICENSE command is invalid.

System action

No additional licenses are registered. Server operation continues.

User response

Obtain a valid license authorization code and try the command again.

ANR96 43E (Windows) An incompatible version of the license module was detected on the system.

Explanation

The detected license module (ADSM LICN.DLL) is not compatible with the current server version.

System action

The server continues operation in Try and Buy mode and might be out of compliance until the correct license module is installed.

User response

Install the license module that corresponds to the level of the installed server.

ANR96 76E (AIX) Error errno attaching memory segment for shared memory communications

Explanation

An error occurred while attempting to attach a shared memory segment for a shared communications session.

System action

The shared memory communications session does not initialize.

User response

Check the AIX documentation for the shmat subroutine and determine what the error number indicates. On AIX, if the error number is EMFILE, make sure the EXTSHM environment variable is set to ON before starting the server. This allows the server to support more than 3 concurrent shared memory sessions.

ANR96 76E (Linux) Error errno attaching memory segment for shared memory communications

Explanation

An error occurred while attempting to attach a shared memory segment for a shared communications session.

System action

The shared memory communications session does not initialize.

User response

Check the AIX documentation for the shmat subroutine and determine what the error number indicates. On AIX, if the error number is EMFILE, make sure the EXTSHM environment variable is set to ON before starting the server. This allows the server

to support more than 3 concurrent shared memory sessions.

ANR96 77E (AIX) Failed to allocate memory for shared memory communications . Error: error text.

Explanation

An error has occurred when attempting to get memory for the shared communications option.

System action

Shared memory communications will not be activated.

ANR96 77E (Linux) Failed to allocate memory for shared memory communications . Error: error text.

Explanation

An error has occurred when attempting to get memory for the shared communications option.

System action

Shared memory communications will not be activated.

User response

None.

ANR96 78E (AIX) Failed to allocate message queue for the shared memory communications Error: error text.

Explanation

An error has occurred when attempting to get memory for the shared communications option.

System action

Shared memory communications will not be activated.

ANR96 78E (Linux) Failed to allocate message queue for the shared memory communications Error: error text.

Explanation

An error has occurred when attempting to get memory for the shared communications option.

System action

Shared memory communications will not be activated.

User response

None.

ANR96 78W (Windows) File name used for server executable. A server is currently running as a service.

Explanation

The name of the executable used when the server is running as a service cannot be used in the plan file.

System action

PREPARE uses file name identified in the message within the plan file and

generation of the plan file continues.

User response

None.

ANR96 Command: The 79W file file name (AIX) cannot be found.

Explanation

The specified file cannot be found.

System action

For the default server executable file, the PREPARE command uses /opt/IBMadsms-s/bin/dsmserv.

User response

Determine why the file does not exist and create it if necessary.

ANR96 Command: 79W Unable to locate (Windo file file name. ws)

Explanation

The specified file cannot be found.

System action

PREPARE uses the following default file names in the plan file:

- For the server executable the default is c:\progra~1\tivoli\tsm\server\dsmserv.

User response

Determine why file does not exist; create if necessary.

ANR96 Command: 80W Could not obtain (AIX) AIX logical volume information for volume name while building stanza recovery plan stanza name.

Explanation

This volume is defined to the server but PREPARE can not obtain AIX logical volume information for it from the AIX Object Data Manager (ODM).

System action

The entry for the volume is not included in the recovery plan stanza.

User response

This message should be preceded by another error message which contains the ODM error code.

ANR96 Unable to locate 80W path for (Windo component in ws) registry.

Explanation

The path to the component could not be found in the registry.

System action

PREPARE uses the following default path names in the plan file:

- For the components installation directory the default is c:\progra~1\tivoli\tsm\server\
- For the administrative command line client the

default is c:\progra~1\tivoli\tsm\baclient\

- For the disk formatting utility the default is c:\progra~1\tivoli\tsm\utils\

User response

Determine why path does not exist; install components if necessary.

ANR96 Command: 81W Volume file (AIX) name not found while building stanza recovery plan stanza name.

Explanation

This volume is defined to the server but does not exist. The device class associated with the volume is DISK or the device class device type is FILE.

System action

The entry for the volume is not included in the recovery plan stanza.

User response

Determine why the file does not exist; create it if necessary.

ANR96 Command: 81W Volume file (Windo name not found ws) while building stanza recovery plan stanza name.

Explanation

This volume is defined to the server but does not exist. The device class associated with the

volume is DISK or the device class device type is FILE.

System action

The entry for the volume is not included in the recovery plan stanza.

User response

Determine why file does not exist; create if necessary.

ANR96 Command: 82E Generated file (AIX) name too long. Length of directory or prefix 'prefix' plus 'name' exceeds maximum characters characters.

Explanation

The file name generated is too long. The maximum valid length is shown in the message.

System action

The recovery plan file was not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR96 Command: 82E Generated file (Windo name too long. ws) Length of directory or prefix 'prefix'

plus 'name' exceeds maximum characters characters.

Explanation

The file name generated is too long. The maximum valid length is shown in the message.

System action

The recovery plan file was not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPPLANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR96 Command:
83E Cannot generate (AIX) fully qualified file name for 'name'.

Explanation

A failure occurred expanding the specified file name.

System action

Recovery plan file not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPPLANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR96 Command:
83E Cannot generate (Windo fully qualified file name for 'name'.

Explanation

A failure occurred expanding the specified file name.

System action

Recovery plan file not created.

User response

Reissue the command specifying a valid prefix. The following commands are used to specify the prefix:

- SET DRMPPLANPREFIX
- SET DRMINSTRPREFIX
- PREPARE

ANR96 Command:
84E Cannot generate (AIX) server options file name.

Explanation

A failure occurred generating the server options file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Command:
84E Cannot generate (Windo server options file name.

Explanation

A failure occurred generating the server options file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Command:
85E Cannot generate (AIX) a volume history file name.

Explanation

A failure occurred generating the volume history file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Command:
85E Cannot generate (Windo a volume history file name.

Explanation

A failure occurred generating the volume history file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Command:
86E Cannot generate (AIX) a device configuration file name.

Explanation

A failure occurred generating the device configuration file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Command:
86E Cannot generate (Windo a device configuration file name.

Explanation

A failure occurred generating the device configuration file name.

System action

Recovery plan file not created.

User response

See accompanying messages for more information.

ANR96 Cannot load the 87W Microsoft dll (Windo NTMSAPI.DLL. ws) Removable Media Support will not be available.

Explanation

The Microsoft dll NTMSAPI.DLL is required for removable media. It is usually found in the Windows System32 directory but can be removed if the Windows feature called Removable Media is turned off. In Windows 2008, Removable Media is off by default.

System action

Processing continues.

User response

Ignore this message if storing to a drive or turn on the Removable Media feature in Windows.

ANR97 51E The volume in drive 'drive name' is not compatible with the drive.

Explanation

The volume cannot be used in the drive. It is most likely an outdated media type that the drive cannot write.

System action

The volume is not labeled.

User response

Remove the volume; replace it with a different type known to work in the drive, or press ENTER to end the program.

ANR97 56I No new volumes were found in the entry/exit ports of the library.

Explanation

During CHECKIN LIBVOLUME command processing, no new volumes were found in the entry/exit ports of the library. For a SCSI library, this can occur if no cartridges are loaded in the library. For a 349X library, this can occur if no new volumes are found in the Insert system category (xFF00) that is defined for the virtual volume.

System action

If the SEARCH=ALL parameter setting is specified for the CHECKIN LIBVOLUME command, command processing continues. If SEARCH=ALL is not specified, command processing is ended, but system operation continues.

User response

Insert cartridges into the entry/exit ports of the library. For 349x libraries, this action might require you to change the category of previously inserted cartridges to be relabeled. Retry the check-in operation, by issuing the CHECKIN LIBVOLUME command.

ANR97 57E SAN discovery is unable to complete.

Explanation

SAN discovery will not complete if a drive serial number is not specified.

System action

None.

User response

Check the library configuration with the IBM Tape Diagnostic Tool (ITDT) or lbtest utility. Ensure that the element addresses of the tape drives are configured correctly in the tape library, and verify that all of the tape drives exist in the library with their serial number. If there is an existing tape drive without a serial number, contact the library vendor for assistance.

ANR97 58W Error mounting volume 'volume name'.

Explanation

An error occurs while mounting the volume to the drive. This may not be an error since the volume or drive maybe in use or locked in a shared environment.

System action

The specified volume is bypassed for labeling.

User response

Ensure that the volume is not locked or in use if label is required.

ANR97 59W The server cannot locate the tape drive with the drive address address because the serial number of the tape drive could not be identified.

Explanation

During the drive inventory operation, no serial number was identified for the specified tape drive. This error might be caused by a hardware or library configuration issue. A tape drive must have a serial number to be used by the server.

System action

System operation continues.

User response

To resolve the error, take one or more of the following actions:

- Ensure that all tape drives are operational.
- Verify the library configuration. Drive addresses must be consecutively numbered, as shown in this example: 100, 101, 102. If drive addresses are not consecutively numbered (for example, 100, 106, 109), correct the issue.

ANR97 60E An invalid block header was read from tape drive tape drive name. The following values were detected: data magic number data magic number, version number data structure version, and block ID block id. The following values were expected: block ID block id just read, data bytes data bytes in

this block, and expected data bytes data bytes read from this block.

Explanation

During an attempt to fetch block data, the block header was found to be corrupted. The block will be marked as damaged.

System action

System operation continues.

User response

To resolve the issue, contact IBM Software Support.

ANR97 61E **The path of drive *drive name* in library *library name* has been changed from original drive path to new drive path. The new path will not be updated because we can not get the model type using new path.**

Explanation

The drive's new path can not be updated because we detect a different device type compared to the Database using this new path. The problem may be the new path has an incorrect format for the device driver.

System action

.

User response

The user needs to check if there are two device special file names for the same drive. For AIX, please make sure the IBM drive is /dev/rmt and IBM Storage Protect drive is /dev/mt. For Solaris, please make sure the Solaris native device driver is not installed.

ANR97 62W **Drive *drive name* is slowly loading tape volume *volume name*. Loading a new volume might take several minutes or a couple of hours.**

Explanation

When a new tape volume is inserted into a tape drive, the drive must load and initialize the tape. The loading and initialization process can take up to two hours. For more information, review the vendor's documentation. The delay can affect Linear Tape-Open (LTO) 9 tape volumes and potentially other tape volumes.

System action

The initialization process continues until the tape drive is ready.

User response

You cannot cancel the process. In the future, new tape volumes that are affected by long initial load times can be loaded into a drive before they are used by the server.

ANR97 71E **Volume *volume name* has an incorrect barcode label describing the volume's WORM type.**

Explanation

In an attempt to CHECKIN or LABEL a volume it was discovered that the volume's true WORM characteristic didn't match that described by its barcode label.

System action

The volume is not checked in.

User response

The volume was probably mislabeled. Find the volume in the library. Simply remove the volume, or swap the barcode label with a label of the opposite WORM characteristic (WORM for non-WORM or vice versa) and retry the check in command.

ANR97 72W **The Archive mode unthread feature is not supported on tape drive *Drive Name*.**

Explanation

The server attempted to change the setting of the Archive mode unthread feature. However, the specified tape drive does not support the Archive mode unthread feature. The Archive mode unthread feature is supported only on the

following tape drives and versions:

- IBM LTO-7, LTO-8, and later
- IBM 3592 tape drives with product IDs 03592E08 and 0359255F and later generation IBM 3592 tape drives

System action

System operation continues, but the Archive mode unthread feature is not enabled. The setting for the Archive mode unthread feature cannot be changed.

User response

Use a tape drive version that supports the Archive mode unthread feature.

ANR97 73W **The server is unable to query or change the setting of the Archive mode unthread feature on tape drive *Drive Name*.**

Explanation

This issue can be caused by any of the following conditions:

- The tape drive, tape device driver, or both do not support the Archive mode unthread feature.
- A hardware issue occurred on the target tape drive.
- The tape drive is in a virtual tape library. Virtual tape libraries do not support the Archive mode unthread feature.

System action

System operation continues, but the server does not query or change the setting of the Archive mode unthread feature.

User response

To resolve the issue, take the following actions:

1. Review the activity log and search for any previous error or warning messages related to the Archive mode unthread feature.
2. Ensure that the Archive mode unthread feature is supported on the tape device driver version and on the tape drive model.
3. If the issue persists, contact the tape drive vendor for assistance.

ANR97 74W *Volume **volume name** should be freed of data as soon as possible.*

Explanation

The server has received an indication from the 3995 that the indicated volume is out of spare sectors for re-allocation. Spare sectors are reserved to take the place of sectors that experience I/O problems. The re-allocation can take place on either a read or write.

System action

The indicated volume is marked read-only by the server.

User response

A MOVE DATA command should be used as soon as possible to move the data from this cartridge to other cartridges in the library. This cartridge should NOT be marked read-write again through the UPDATE VOLUME command.

ANR97 75E *Error while writing on volume **volume name** (RC=**internal code**).*

Explanation

An I/O error has occurred while writing on the specified volume.

System action

The operation fails.

User response

Ensure that the 3995 volume is accessible and that the media is usable. Diagnostics may have to be run on the 3995 with the specified volume. If the problem persists, contact your service representative and provide the internal code values from this message. The internal code is returned to the server from the OS/2 operating system.

ANR97 76I *File **file name** is being erased and deleted. Data erasure may take several minutes.*

Explanation

A file is being deleted from an optical library

cartridge. The file is deleted when a LAN3995 device class volume is deleted. File deletion includes erasure of data. The erasure process can take several minutes to complete.

System action

The operation continues.

User response

None.

ANR97 77E *The Archive mode unthread feature cannot be enabled because tape device drive **driver name** with tape device driver version **current driver version** is not compliant.*

Explanation

The Archive mode unthread feature is not supported on this tape device driver version. To use the Archive mode unthread feature, the following minimum IBM tape device driver version levels are required:

- AIX systems: Atape driver Version 13.0.29.0
- Linux systems: Lin_tape driver V3.0.39
- Windows systems: NT driver V6.2.6.8

The IBM Storage Protect server uses the default setting for the Archive mode unthread feature that is specified in the tape device firmware. For IBM LTO-7 and LTO-8 tape drives, the default setting is NO. For IBM

0359255F and 03592E08 tape drives, the default setting is YES.

System action

System operation continues, but the Archive mode unthread feature is not enabled. The setting for the Archive mode unthread feature cannot be changed.

User response

To enable the Archive mode unthread feature, install driver version *supported driver version* or later. The default setting takes effect immediately.

ANR97 78E *Unable to establish a communication session with the primary library manager.*

Explanation

The requested operation required that a communication session be established with a library manager. The library manager was found to be unavailable at this time.

System action

None.

User response

Verify the primary library manager is up and operational. Once the server is verified to be operational, retry the operation.

ANR97 79E *Unable to acquire a drive for volume **volume name***

from the library manager.

Explanation

The library manager was unable to assign a drive to the library client. There are a couple of situations that can cause this error.

- All drives are currently allocated to other library clients or the library manager.
- The request for a specific drive cannot be satisfied. This can occur if a drive on the library client side is marked offline or is currently busy with another process.
- A communication error occurred during the request to mount a volume.
- The requested volume was not present in the library manager's inventory

System action

None.

User response

Verify that a drive is available on the library manager side and the drive is currently not busy or marked offline on the library client. Set the mount retention on the device class on the library manager and the library clients to a lower value. Using a lower mount retention value can free up drives.

ANR97 80E *Volume volume name is not mounted in drive from the library drive name.*

Explanation

A communication error occurred while dismount the volume.

System action

None.

User response

Verify the library manager is up and operational. Verify that the library manager and library client can communicate using command routing.

ANR97 81E *Volser volume name was not found to be mounted on the library manager.*

Explanation

According to the library manager the requested volume is no longer mounted. The can occurred if the library manager forced the volume to be dismounted because of a communication error.

System action

None.

User response

Verify that the volume has been dismounted.

ANR97 82E *Primary Library Manager primary library manager name is NOT defined as a server.*

Explanation

The primary library manager server has not be defined to this server.

System action

None.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 83E *Primary Library Manager does not contain a valid value.*

Explanation

The primary library manager server has not be defined to this server.

System action

None.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 84E *Secondary Library Manager secondary library manager name is NOT defined as a server.*

Explanation

The secondary library manager server name has not be defined to this server.

System action

None.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 85E *Drive drive name, is not*

defined on the library manager.

Explanation

A drive is being defined that does not exist or is being managed by the library manager.

System action

None.

User response

Verify drive name with the library manager.

ANR97 86E *A communication error has occurred. Operation ending.*

Explanation

A communication error occurred.

System action

None.

User response

Verify the library manager is up and operational. Verify that the library manager and library client can communicate using command routing.

ANR97 87E *The owner name specified is not defined to this server.*

Explanation

A command was issued specifying ownership of a volume. The name of the owner given was not defined to this server.

System action

None.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 88E Command:
Library library name is not defined - the primary library manager not defined.

Explanation

The designated library is not defined because the primary library manager is not defined as a server to this server.

System action

The command is not processed.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 89E Command:
Library library name is not defined - the secondary library manager not defined.

Explanation

The designated library is not defined because the secondary library manager is not defined as a server to this server.

System action

The command is not processed.

User response

Define the server to this server using the DEFINE SERVER command.

ANR97 90W Request to mount volume Volume Name for library client Library Client Name failed.

Explanation

A library client requested a volume to be mount by the library manager, which in turn failed.

System action

None.

User response

Verify the status of all drives are currently online and not in use by other library clients or the library manager itself. Free up drive resources as needed.

ANR97 91I Volume Volume Name in library Library Name ownership is changing from Current volume owner to New Volume owner.

Explanation

In a shared library, the volume ownership has been changed from current owner to new owner.

System action

None.

User response

None.

ANR97 92E Library Library Name on library manager Library Manager Name is currently not being shared.

Explanation

A define library command attempted to define a shared library that was not being shared by the library manager.

System action

None.

User response

Verify the library on the library manager is being shared. If the library is not being shared, update the library shared status to yes.

ANR97 93I process name in library library name- CANCEL PENDING.

Explanation

In response to a QUERY PROCESS command, this message displays the status for a process on the server. The command was started, but the process was canceled by an administrator.

System action

The background process operation is being terminated.

User response

None.

ANR97 94E Unable to load the RSM dynamic link library dynamic link library.

Explanation

The server module is unable to load the indicated dynamic link library.

System action

Server operation continues, but the function that requires the dynamic link library will be inoperative.

User response

Ensure that the installed Windows version supports RSM. Ensure that the Removable Storage Manager is installed and the system DLL is accessible.

ANR97 95E Command:
Invalid storage agent name storage agent name.

Explanation

The designated storage agent name is invalid; either it contains too many characters, or some of the characters are invalid.

System action

The command is not processed.

User response

Reissue the command using a valid storage agent name.

ANR97 96E Command:
Drive mapping is already defined for drive drive name in library library name on storage agent

<i>storage agent name.</i>	<i>name in library library name.</i>		
Explanation The designated drive mapping cannot be defined because it has already been defined for the specified drive, library, and storage agent.	Explanation The designated drive cannot be deleted because there are still paths defined for it.	Explanation The command attempted to perform an operation that is not allowed unless the library is allowed to be shared.	not available to process requests from the server.
System action The command is not processed.	System action The command is not processed.	System action None.	User response For minimum storage requirements, refer to <i>Licensed Program Specifications?2</i> . You must have sufficient memory in your system to initialize Windows and the device drivers you want to use.
User response If you want to define an additional drive mapping, reissue the command with a different drive name.	User response Delete all paths for the drive, and reissue the command.	User response Verify the library on the library manager is being shared. If the library is not being shared, update the library shared parameter to yes.	<hr/> ANR98 10I (Windows) ANR9810: SCSI Tape Device Driver Initializing...
<hr/> ANR97 97E Command: Drive mapping for drive drive name is not defined in library library name on storage agent storage agent name.	<hr/> ANR97 99E Command: Library Library Name is currently not being shared.	<hr/> ANR98 01I (Windows) ANR9801: Ready for operations.	Explanation The server SCSI tape device driver has been invoked by the system and is initializing.
Explanation The designated drive map has not been defined for the given drive in the given library on the given storage agent.	Explanation The command attempted to perform an operation that is not allowed unless the library is allowed to be shared.	Explanation The device driver has successfully initialized and is ready to accept requests from the server.	System action Processing continues.
System action The command is not processed.	System action None.	System action Processing continues.	User response None.
User response Reissue the command using a different drive name. If appropriate, define the drive before retrying the command.	User response Verify the library on the library manager is being shared. If the library is not being shared, update the library shared parameter to yes.	User response None.	<hr/> ANR98 20I (Windows) ANR9820: SCSI Autochanger Device Driver Initializing...
<hr/> ANR97 98E Command: One or more paths are still defined for drive drive	<hr/> ANR98 00E Library Library Name is currently not being shared and attempted an operation only allowed for shared libraries.	<hr/> ANR98 03W (Windows) ANR9803: ERROR! Insufficient free memory to initialize driver.	Explanation The server SCSI automatic changer device driver has been invoked by the system and is initializing.
		Explanation The server device driver is unable to initialize due to an inability to acquire dynamic storage.	System action Processing continues.
		System action Processing continues. The device driver is	User response None.
			<hr/> ANR99 00W (AIX) Attention -- Accounting records could

**not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to open the accounting file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
00W Accounting
(Linux) records could
not be written
to the file: file
name.**

Explanation

The server detects an error while trying to open the accounting file.

System action

Server processing continues, but no accounting records are written.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
00W Accounting
(Windows) records could
not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to open the accounting file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
01W Accounting
(AIX) records could
not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to write an accounting record.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
01W Accounting
(Linux) records could
not be written
to the file: file
name.**

Explanation

The server detects an error while trying to write an accounting record.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
01W Accounting
(Windows) records could
not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to write an accounting record.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
02W Accounting
(AIX) records could
not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to close the accounting file.

System action

Server processing continues.

User response

Ensure that sufficient disk space is available and

that the accounting file is not marked as read-only.

**ANR99 Attention --
02W Accounting
(Linux) records could
not be written
to the file: file
name.**

Explanation

The server detects an error while trying to close the accounting file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Attention --
02W Accounting
(Windows) records could
not be written
to the file:
filespec.**

Explanation

The server detects an error while trying to close the accounting file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the accounting file is not marked as read-only.

**ANR99 Adapter device
04E Device name
(AIX) failed to open.**

Explanation

Permission was denied. The server did not complete the logical unit number (LUN) reset function to clear the reservation from the tape drive.

System action

Server operations continue, but the target tape drive is inaccessible.

User response

To resolve the issue, take one of the following actions: - Run a power cycle to the target tape drive - If the tape drive supports persistent reserve, change the reservation type from SCSI-2 to the persistent reserve type that is used for the tape device driver.

ANR99 Unable to open 05W file file. Error (AIX) message generated by AIX

Explanation

The server was unable to open the file because the specified file name was incorrect, or permissions were insufficient.

System action

Server operation continues, but the operation that was to use the specified file fails.

User response

Determine why the file could not be opened, correct the issue, and re-attempt the operation. Consider the following

possible reasons: - An invalid file name was specified. - Permissions were insufficient. For example, the operation to open the file might require file ownership. Or, if files are shared on a Network File System (NFS) server, the storage agent fails to open them with a message that permission is denied. A storage agent cannot open shared files on an NFS server.

ANR99 Unable to open 05W file file. Error (Linux) message generated by Linux.

Explanation

The server was unable to open the file because the specified file name was incorrect, or permissions were insufficient.

System action

Server operation continues, but the operation that was to use the specified file fails.

User response

Determine why the file could not be opened, correct the issue, and re-attempt the operation. Consider the following possible reasons: - An invalid file name was specified. - Permissions were insufficient. For example, the operation to open the file might require file ownership. Or, if files are shared on a Network File System (NFS) server, the storage agent fails to open them with a message that permission is denied.

A storage agent cannot open shared files on an NFS server.

ANR99 Unable to open 05W file file. Error (Windows) message generated by Windows.

Explanation

The server was unable to open the file because the specified file name was incorrect, or permissions were insufficient.

System action

Server operation continues, but the operation that was to use the specified file fails.

User response

Determine why the file could not be opened, correct the issue, and re-attempt the operation. Consider the following possible reasons: - An invalid file name was specified. - Permissions were insufficient. For example, the operation to open the file might require file ownership. Or, if files are shared on a Network File System (NFS) server, the storage agent fails to open them with a message that permission is denied. A storage agent cannot open shared files on an NFS server.

ANR99 The volume 06E named volume name is larger than is allowed for a volume on your system. Maximum allowed size is allowed size.

Explanation

While attempting to open a volume the server detected that the volume size exceeds the maximum allowed.

System action

The operation fails.

User response

Define multiple smaller volumes.

ANR99 Attention -- 50W License option (Windows) could not be written to the file: filespec.

Explanation

The server detects an error while trying to write to the options file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the options file is not marked as read-only.

ANR99 Attention -- 51W License option (Windows) could not be written to the file: filespec.

Explanation

The server detects an error while trying to close the options file.

System action

Server processing continues.

User response

Ensure that there is sufficient disk space and that the options file is not marked as read-only.

ANR99 Command:
52E Invalid value
(Windows) specified for
licensed storage
capacity - value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a valid value.

ANR99 Command:
53E Invalid value
(Windows) specified for
number of
licensed clients
- value.

Explanation

The specified command has been issued with an invalid value.

System action

Server operation continues, but the command is not processed.

User response

Issue the command using a valid value.

ANR99 Unable to load
55W dynamic link

(Windows) library dynamic
link library.

Explanation

The server module is unable to load the indicated dynamic link library.

System action

Server operation continues, but the function that requires the dynamic link library will be inoperative.

User response

Ensure that the dynamic link library directories are accessible. If this is an evaluation copy of the server, then this message is normal for the DSMREG library, since the library is only provided with purchased Windows servers. The server licensing will assume "Try and Buy" mode with sample licensed options for a period of time.

ANR99 Unable to load
56E procedure
(Windows) address from
dynamic link
library dynamic
link library.

Explanation

The server module is unable to load the address of a routine in the indicated dynamic link library.

System action

Server operation continues, but the function that requires the dynamic link library will be inoperative.

User response

Ensure that the dynamic link library directories are accessible. If the problem persists, contact your service representative.

ANR99 One or more
57W EVALUATION
(Windows) LICENSES will
expire on
expiration date.

Explanation

Although you are running with a purchased version of the server, there are one or more licenses registered that will expire on the date specified. This is usually the case when you have been using evaluation licenses prior to purchasing the server for Windows.

System action

Server operation continues.

User response

Halt the server and erase the nodelock file in the server startup directory. After restarting the server, use the REGISTER LICENSE command to define the licensed features that you have purchased with your Windows server. These licenses should NOT have an expiration date, so this message should not appear after re-registering the proper licenses. If this message persists, contact your service representative.

ANR99 Node entry node
58W name was
(Windows) removed from
this server's
definition in

Active
Directory.

Explanation

In response to a REMOVE NODE command, the requested backup-archive node has been removed from this server's definition in Active Directory.

System action

None.

User response

None.

ANR99 Node entry node
59W name was not
(Windows) removed from
this server's
definition in
Active
Directory.

Explanation

In response to a REMOVE NODE command, the requested backup-archive node has not been removed from this server's definition in Active Directory.

System action

None.

User response

To remove a node entry in the Active Directory, the option "adunregister" has to be set to "yes" in the server options file. A domain controller must also be available. The Active Directory Configuration wizard can be used to manually update the server definition.

ANR99 60W Node entry *node name* has been added to this server's definition in Active Directory.

Explanation

The requested backup-archive node entry has been added to this server's definition in Active Directory in response to a REGISTER NODE command.

System action

None.

User response

None.

ANR99 61W Node entry *node name* has not been added to this server's definition in Active Directory.

Explanation

The requested backup-archive node entry has not been added to this server's definition in Active Directory in response to a REGISTER NODE command.

System action

None.

User response

To register a node entry in the Active Directory, the option "adregister" has to be set to "yes" in the server options file. A domain controller must also be available. The Active

Directory Configuration wizard can be used to manually update the server definition.

ANR99 62W Node entry *node name* was renamed in this server's definition in Active Directory.

Explanation

In response to a RENAME NODE command, the requested backup-archive node has been renamed to the new name shown.

System action

None.

User response

None.

ANR99 63W Node entry *node name* was not renamed in this server's definition in Active Directory.

Explanation

In response to a RENAME NODE command, the requested backup-archive node has not been renamed.

System action

None.

User response

To Rename Node in the Active Directory, the options "adregister" and "adunregister" have to be set to "yes" in the server options file. A domain controller must also be

available. The Active Directory Configuration wizard can be used to manually update the server definition.

ANR99 64W Failed to access Active Directory. RC: *return code*

Explanation

Could not communicate with an Active Directory server.

System action

Server operation continues.

User response

Try using the option "adsetdc" in the server options file to explicitly provide the TCP/IP address of the domain controller where Active Directory is located.

ANR99 65W Could not create the initial node list in Active Directory for this server.

Explanation

At startup the server's registered nodes could not be added to the server definition in Active Directory

System action

Server operation continues.

User response

Try using the option "adsetdc" in the server options file to explicitly provide the TCP/IP address of the domain

controller where Active Directory is located.

ANR99 66I NodeName *nodeName* name.

Explanation

The NodeName is registered in Active Directory.

System action

Server operation continues.

User response

None.

ANR99 67I Server *server name* was defined in Active Directory.

Explanation

The server is registered in Active Directory.

System action

None.

User response

None.

ANR99 68I Success accessing Active Directory.

Explanation

Active Directory Server could be contacted.

System action

User response

None.

ANR99 69E (Windows) Unable to open volume *volume name*. The most likely reason is that another IBM Storage Protect server is running and has the volume allocated.

Explanation

Only one IBM Storage Protect server can have a given volume open at a time.

System action

The IBM Storage Protect server does not start.

User response

See if another IBM Storage Protect server is already running and if so use it.

**ANR99 (component)
99D (code):(text)**

Explanation

The diagnostic text of this message is related to a server process or algorithm. The information is intended for reporting processing

exceptions and other non-standard situations that occur on the server. The (component), (code), and (text) vary, and server processing may continue, depending upon the cause of the message and the server process or algorithm issuing the message.

System action

Issue the SET CONTEXTMESSAGING command and set the message context reporting to ON. This allows you to receive additional information when the server produces its message.

User response

Examine any error messages that were displayed before or after this message and correct any problems, if possible. If you cannot determine or resolve the cause of this message, contact your support representative. Report the entire text of this message when contacting your support representative.

ANR Messages

10001-xxxxx

ANR26 730T	Explanation of RC Value for Source Server
---------------	---

ANR26 731T	Explanation of RC Value for Target Server
---------------	---

Chapter 4. Descriptions of I/O codes in server messages

IBM Storage Protect messages can contain input/output (I/O) codes. The codes can be operation codes, completion codes, additional sense codes (ASC), and additional sense code qualifier (ASCQ) codes.

Code descriptions are provided for I/O error messages from the IBM Storage Protect server for all supported operating systems.

Code

Description

OP

I/O operation that failed. These values can be displayed:

- READ
- WRITE
- FSR (forward space record)
- RSR (reverse space record)
- FSF (forward space file)
- RSF (reverse space file)
- WEOF (write end of file mark)
- OFFL (rewind and unload the tape)
- FLUSH (flush)
- GET_MEDIUM_INFO (get medium information)
- LOCATE (locate)
- QRYLBP (query logical block protection)
- RDBLKID (read block ID)
- SETLBP (set logical block protection)
- SETMODE (set mode)
- REW (rewind)
- SPACEEOD (space end of data)
- TESTREADY (test drive ready)

CC

I/O completion code. This value is returned by the device driver to the server when an error occurs. For a list of completion codes, see [“Completion code and operation code values overview” on page 888](#). For information about tape library system calls and error descriptions for the library I/O control requests, see [technote S7002972](#).

KEY

Byte 2 of the sense bytes from the error. The following lists some definitions:

- 0 = no additional sense bytes available
- 1 = recovered error
- 2 = not ready
- 3 = medium error
- 4 = hardware error
- 5 = incorrect request
- 6 = unit attention (for example, a SCSI bus reset)
- 7 = data protect
- 8 = blank check

9 = vendor specific
A = copy canceled
B = canceled command
C = obsolete
D = volume overflow
E = miscompare
F = reserved

ASC/ASCQ

ASC and ASCQ codes are bytes 12 and 13 of the sense bytes. The drive or library reference manual provided with the device contains tables explaining the values of the KEY, ASC, and ASCQ fields. “Descriptions of standard ASC and ASCQ codes” on page 893 provides additional information about standard values of ASC and ASCQ codes.

Operating system error codes

When a command fails, the operating system returns an error number. To determine what the error codes mean, take the following action:

On AIX®, HP-UX, and Solaris, platforms, view the `errno.h` file in the `/usr/include/sys` directory. This file provides definitions for error codes.

On Linux platforms, view the `errno-base.h` and `errno.h` files in the `/usr/include/asm-generic` directory. These files provides definitions for codes.

On Windows platforms, contact Microsoft Support for help with error messages.

Completion code and operation code values overview

IBM Storage Protect messages can contain device driver completion codes from the device drivers.

Device drivers completion codes: Common codes

IBM Storage Protect device drivers provide completion codes that are common to all device classes.

The following table shows common completion code values for IBM Storage Protect device drivers. Each entry provides a description for the I/O error message and the recommended action. After completing the recommended action, try the failing operation again.

Table 1. Completion code values common to all device classes

Decimal	Hexadecimal	Description	Recommended action
200	X'C8'	The device indicated a failure condition, but sense data was unavailable.	Try the failing operation again.
201	X'C9'	The device driver failed.	Contact IBM Storage Protect Support.
202	X'CA'	The device EEPROM failed.	Test the device. Service the device if necessary.
203	X'CB'	Manual intervention is required.	Correct the problem on the device. The problem can be a stuck tape, dirty heads, or a jammed library arm.
204	X'CC'	The system recovered from an I/O error; for your information only.	No action necessary.
205	X'CD'	The SCSI adapter failed.	Check for loose cables, bent pins, bad cables, bad SCSI adapters, improper termination, or bad terminators.
206	X'CE'	A general SCSI failure occurred.	Check for loose cables, bent pins, bad cables, bad SCSI adapters, improper termination, or bad terminators.

Table 1. Completion code values common to all device classes (continued)

Decimal	Hexadecimal	Description	Recommended action
207	X'CF'	The device cannot perform the requested action.	Ensure that the device is on and ready. Ensure that the drive was defined appropriately with the DEFINE DRIVE command. Ensure that the device class was defined appropriately with the DEFINE DEVCLASS command.
208	X'D0'	The command stopped.	Contact IBM Storage Protect Support.
209	X'D1'	A failure is detected in the device microcode.	Check the microcode level of the drive. Contact the drive manufacturer and request the latest level.
210	X'D2'	The device was reset due to device power-up, SCSI bus reset, or manual tape load/eject.	Try the failing operation again.
211	X'D3'	The SCSI bus is busy.	Ensure that the SCSI IDs are correctly assigned to the correct device, and the device is not being accessed by another process.
212	X'D4'	Persistent reservation is not supported on this device.	No action is necessary.
213	X'D5'	A persistent reservation operation failed.	Reset the device and try the operation again. If the problem persists, contact IBM Storage Protect Support.

Device drivers completion codes: Media changers

IBM Storage Protect device drivers provide completion codes that are specific to media changer devices.

The following table shows completion code values for IBM Storage Protect device drivers for media changers. Each entry provides a description for the I/O error message and the recommended action. After performing the recommended action, try the failing operation again.

Table 2. Completion code values for media changers

Decimal	Hexadecimal	Description	Recommended action
300	X'12C'	Cartridge entry/exit error	Check the entry/exit ports for a jammed volume.
301	X'12D'	Cartridge load failure	Check the drive for jammed volumes. On AIX, display the errpt to check for hardware errors.
302	X'12E'	Cartridge in failed drive	Check the drive for jammed volumes. On AIX, display the errpt to check for hardware errors.
303	X'12F'	Carousel not loaded	Ensure that the carousel is correctly in place and the door is shut.
304	X'130'	Changer failure	On AIX, display the errpt to check for hardware errors.

Table 2. Completion code values for media changers (continued)

Decimal	Hexadecimal	Description	Recommended action
305	X'131'	Drive failure	Ensure that the heads are clean. On AIX, display the errpt to check for hardware errors.
306	X'132'	Drive or media failure	Ensure that the heads are clean. On AIX, display the errpt to check for hardware errors.
307	X'133'	Entry/exit failure	Check the tape library interface for hardware errors. If there are no errors, contact IBM Storage Protect Support.
308	X'134'	Entry/exit port not present	Check the tape library interface for hardware errors. If there are no errors, contact IBM Storage Protect Support.
309	X'135'	Library audit error	Ensure that there are no jammed volumes. It is possible that the library audit is failing due to hardware errors. On AIX, display the errpt to check for hardware errors.
310	X'136'	Library full	Check for jammed volumes. Ensure that the volumes are not rearranged. If the library is not full, start the AUDIT LIBRARY command.
311	X'137'	Media export	Check the tape library interface for hardware errors. If there are no errors, contact IBM Storage Protect Support.
312	X'138'	Slot failure	Ensure that nothing is jammed in the slot.
313	X'139'	Slot or media failure	Ensure that the volume is not jammed in the slot and that the volumes are not rearranged. If the problem persists, start the AUDIT LIBRARY command.
314	X'13A'	The source slot or drive was empty in an attempt to move a volume	Ensure that the volumes are not rearranged. If the problem persists, start the AUDIT LIBRARY command.
315	X'13B'	The destination slot or drive was full in an attempt to move a volume	Ensure that the volumes are not rearranged, or that a volume is not stuck in the drive. If problem persists, start the AUDIT LIBRARY command.
316	X'13C'	Cleaner cartridge installed	Contact IBM Storage Protect support.
317	X'13D'	Media not ejected	Ensure that the volumes are not rearranged, or that a volume is not stuck in the drive. If problem persists, start the AUDIT LIBRARY command.
318	X'13E'	I/O port not configured	Contact IBM Storage Protect Support.

Table 2. Completion code values for media changers (continued)

Decimal	Hexadecimal	Description	Recommended action
319	X'13F'	First destination empty	Ensure that the volumes are not rearranged. If problem persists, start the AUDIT LIBRARY command.
320	X'140'	No inventory information	Start the AUDIT LIBRARY command.
321	X'141'	Read element status mismatch	Ensure that host bus adapter drivers and firmware are at current levels. Check the tape library interface for hardware errors. If there are no errors, contact IBM Storage Protect Support.
322	X'142'	Initialize range failed	Check the tape library interface for hardware errors. If there are no errors, contact IBM Storage Protect Support.

Device drivers completion codes: Tape drives

IBM Storage Protect device drivers provide completion codes that are specific to tape drives.

The following table shows completion code values for IBM Storage Protect device drivers for tape drives. Each entry provides a description for the I/O error message and the recommended action. After trying the recommended action, try the failing operation again.

Table 3. Completion code values for tape drives

Decimal	Hexadecimal	Description	Recommended action
400	X'190'	Physical end of media encountered	Ensure that the heads are clean on the drive.
401	X'191'	End of data detected	Contact IBM Storage Protect Support.
402	X'192'	Media corrupted	Ensure that the heads are clean. Ensure that the media is not physically damaged and has not reached the end of life as specified by the media manufacturer.
403	X'193'	Media failure	Ensure that the heads are clean. Ensure that the media is not physically damaged and has not reached the end of life as specified by the media manufacturer.
404	X'194'	Media incompatibility	Ensure that the correct length and type of media is being used.
406	X'196'	Sector that is requested is invalid	Internal server error. Contact IBM Storage Protect Support.
407	X'197'	Write protect	Ensure that the volume is not write protected.
408	X'198'	Clean the media and the drive	Clean the drive heads with a cleaning cartridge.

Table 3. Completion code values for tape drives (continued)

Decimal	Hexadecimal	Description	Recommended action
409	X'199'	Media fault	Ensure that the heads are clean. Ensure that the media is not physically damaged and has not reached the end of life as specified by the media manufacturer.
410	X'19A'	Cleaning complete	Try the failing operation again.
411	X'19B'	Logical end of media encountered	Contact IBM Storage Protect Support.
412	X'19C'	Media not present in drive	Ensure that the media is correctly positioned in the drive. If problem persists, start the AUDIT LIBRARY command.
413	X'19D'	Encountered the beginning of the media	Contact IBM Storage Protect Support.
414	X'19E'	Erase failure	Clean the drive heads.
415	X'19F'	Attempted to overwrite written WORM media	Internal server error. Contact IBM Storage Protect Support.
416	X'1A0'	An incorrect length block was read.	Ensure that the heads are clean. On AIX, display the errpt to check for hardware errors.
417	X'1A1'	Open read only	Contact IBM Storage Protect Support.
418	X'1A2'	Open write only	Contact IBM Storage Protect Support.
419	X'1A2'	Media scan failed	Clean the drive and media.
420	X'1A4'	Logical write protect	Ensure that the heads are clean. Check operating system error logs for hardware errors. Verify that the write protect tab is off. Turn off SAN tape acceleration or set CHECKTAPEPOS to OFF or TSMonly.
422	X'1A6'	Cleaning is required	Clean the tape drive.
423	X'1A7'	Media error	Check operating system error logs for hardware errors. Check for bad media.
424	X'1A8'	Encryption-related error occurred	Check your encryption setting on your device class and tape drive.
425	X'1A9'	Decryption-related error occurred	Check your encryption setting on your device class and tape drive.
425	X'1AA'	An external, encryption-related error occurred	Check the encryption setting on your device class and tape drive.
426	X'1AB'	A CRC mismatch occurred	Ensure that the media has not reached the end of life as specified by the media manufacturer. Try the operation again.

Descriptions of standard ASC and ASCQ codes

Standard ASC and ASCQ codes are described.

The ASC and ASCQ codes are bytes 12 and 13 for SCSI-2 devices. On Windows systems, these codes are displayed in the Windows Event Log, but the information is in different bytes.

See server message ANR8300E or ANR8302E for the recommended action.

The following table provides standard descriptions for some ASC and ASCQ codes. Each value has a prefix of 0x, which indicates that it is a hexadecimal constant. Note that descriptions vary among devices. For an accurate description of ASC and ASCQ codes for any device, see the documentation that comes with the device.

Table 4. Descriptions of standard ASC and ASCQ codes

ASC	ASCQ	Description
0x00	0x00	No additional sense
0x00	0x01	Filemark detected
0x00	0x02	End-of-medium detected
0x00	0x03	Setmark detected
0x00	0x04	Beginning of medium
0x00	0x05	End of data
0x00	0x06	I/O process terminated
0x02	0x00	No seek complete
0x03	0x00	Device write fault
0x03	0x01	No write current
0x03	0x02	Excessive write errors
0x04	0x00	Logical unit not ready
0x04	0x01	Becoming ready
0x04	0x02	Not ready, initializing command required
0x04	0x03	Not ready, manual intervention required
0x04	0x04	Not ready, formatting
0x05	0x00	No response to select
0x06	0x00	No reference position found
0x07	0x00	Multiple devices selected
0x08	0x00	Communication failure
0x08	0x01	Communication timeout
0x08	0x02	Communication parity error
0x09	0x00	Track following error
0x0A	0x00	Error log overflow
0x0C	0x00	Write error
0x11	0x00	Unrecovered read error

Table 4. Descriptions of standard ASC and ASCQ codes (continued)

ASC	ASCQ	Description
0x11	0x01	Read retries exhausted
0x11	0x02	Error too long to correct
0x11	0x03	Multiple read errors
0x11	0x08	Incomplete block read
0x11	0x09	No gap found
0x11	0x0A	Miscorrected error
0x14	0x00	Recorded entity not found
0x14	0x01	Record not found
0x14	0x02	Filemark/setmark not found
0x14	0x03	End-of-data not found
0x14	0x04	Block sequence error
0x15	0x00	Random positioning error
0x15	0x01	Mechanical positioning error
0x15	0x02	Read positioning error
0x17	0x00	No error correction applied
0x17	0x01	Recovered with retries
0x17	0x02	Recovered with positive head offset
0x17	0x03	Recovered with negative head offset
0x18	0x00	ECC applied
0x1A	0x00	Parameter list length error
0x1B	0x00	Synchronous data transfer error
0x20	0x00	Invalid operation code
0x21	0x00	Block out of range
0x21	0x01	Invalid element address
0x24	0x00	Invalid field in CDB
0x25	0x00	LUN not supported
0x26	00	Invalid field in parameter list
0x26	0x01	Parameter not supported
0x26	0x02	Parameter value invalid
0x26	0x03	Threshold parameters not supported
0x27	0x00	Write protected
0x28	0x00	Not-ready to ready
0x28	0x01	Import/export element accessed
0x29	0x00	Power-on, reset, bus reset

Table 4. Descriptions of standard ASC and ASCQ codes (continued)

ASC	ASCQ	Description
0x2A	0x00	Parameters changed
0x2A	0x01	Mode parameters changed
0x2A	0x02	Log parameters changed
0x2B	0x00	Copy cannot run
0x2C	0x00	Command sequence error
0x2D	0x00	Overwrite error on update
0x2F	0x00	Command cleared by initiator
0x30	0x00	Incompatible media
0x30	0x01	Media unknown format
0x30	0x02	Media incompatible format
0x30	0x03	Cleaning cartridge installed
0x31	0x00	Media format corrupted
0x33	0x00	Tape length error
0x37	0x00	Rounded parameter
0x39	0x00	Saving parameters not supported
0x3A	0x00	Medium not present
0x3B	0x00	Sequential positioning error
0x3B	0x01	Positioning error at BOT
0x3B	0x02	Positioning error at EOT
0x3B	0x08	Reposition error
0x3B	0x0D	Medium destination element full
0x3B	0x0E	Medium source element empty
0x3D	0x00	Invalid bits in message
0x3E	0x00	LUN not self-configured
0x3F	0x00	Operating conditions changed
0x3F	0x01	Microcode changed
0x3F	0x02	Changed operating definition
0x3F	0x03	Inquiry data changed
0x3F	0x0E	Reported LUNs data changed
0x43	0x00	Message error
0x44	0x00	Internal target failure
0x45	0x00	Select/reselect failure
0x46	0x00	Unsuccessful soft reset
0x47	0x00	SCSI parity error

Table 4. Descriptions of standard ASC and ASCQ codes (continued)

ASC	ASCQ	Description
0x48	0x00	Initiator detected message received
0x49	0x00	Invalid message error
0x4A	0x00	Command phase error
0x4B	0x00	Data phase error
0x4C	0x00	LUN failed self-configuration
0x4E	0x00	Overlapped commands attempt
0x50	0x00	Write append error
0x50	0x01	Write append position error
0x50	0x02	Position error (timing)
0x51	0x00	Erase failure
0x52	0x00	Cartridge fault
0x53	0x00	Load/media eject failed
0x53	0x01	Unload tape failure
0x53	0x02	Media removal prevented
0x5A	0x00	Operator state changed
0x5A	0x01	Operator media removal
0x5A	0x02	Operator write protect
0x5A	0x03	Operator write permit
0x5B	0x00	Log exception
0x5B	0x01	Threshold condition met
0x5B	0x02	Log counter at maximum
0x5B	0x03	Log list codes exhausted

ASC and ASCQ codes in the Windows Event Log

ASC and ASCQ codes are displayed in the Windows Event Log.

The ASC and ASCQ codes are displayed as hexadecimal values in the Data area of the Windows Event Log. The Event Log omits the 0x prefix for the displayed information.

In the Windows Event Log, the entries with source AdsmScsi are produced by the IBM Storage Protect AdsmScsi device driver. Entries from the AdsmScsi device driver or any Windows tape device driver contain the following information:

- Byte 3E is the sense key
- Byte 3D is the ASC
- Byte 3C is the ASCQ

If byte 44 is 'ef', the error logged is not a check condition error. Examples of such errors are command timeouts or device selection errors.

Chapter 5. Device error codes in the AIX system error log

Some device error codes are logged in the AIX system error log.

ADSM_DD_LOG1 (0xAC3AB953)

DEVICE DRIVER SOFTWARE ERROR

This error is logged by the IBM Storage Protect device driver when a problem is suspected in the IBM Storage Protect device driver software. If the IBM Storage Protect device driver issues a SCSI I/O command with an illegal operation code, the command fails and the error is logged with this identifier. Report this error immediately to IBM Storage Protect Support.

Detail Data: Sense Data

The sense data contains information that can determine the cause of the error. Report all data in the error entry to IBM Storage Protect Support.

ADSM_DD_LOG2 (0x5680E405)

HARDWARE/COMMAND-ABORTED ERROR

This error is logged by the IBM Storage Protect device driver when the device reports a hardware error or stop-command error in response to a SCSI I/O command.

Detail Data: Sense Data

The sense data contains information that can determine which hardware component failed and why. To interpret the sense data for a particular device, refer to the SCSI specification manual for the device.

ADSM_DD_LOG3 (0x461B41DE)

MEDIA ERROR

This error is logged by the IBM Storage Protect device driver when a SCSI I/O command fails because of corrupted or incompatible media, or because a drive requires cleaning.

Detail Data: Sense Data

The sense data contains information that can determine the cause of the error. To interpret the sense data for a particular device, refer to the SCSI specification manual for the device.

ADSM_DD_LOG4 (0x4225DB66)

TARGET DEVICE GOT UNIT ATTENTION

This error is logged by the IBM Storage Protect device driver after receiving certain UNIT ATTENTION notifications from a device. UNIT ATTENTIONs are informational and usually indicate that some state of the device changed. For example, this error would be logged if the door of a library device was opened and then closed. Logging this event indicates that the activity occurred and that the library inventory might be changed.

Detail Data: Sense Data

The sense data contains information that describes the reason for the UNIT ATTENTION. To interpret the sense data for a particular device, see the SCSI specification manual for the device.

ADSM_DD_LOG5 (0xDAC55CE5)

PERMANENT UNKNOWN ERROR

This error is logged by the IBM Storage Protect device driver after receiving an unknown error from a device in response to a SCSI I/O command. If the error persists, report it to IBM Storage Protect support personnel.

Detail Data: Sense Data

The sense data consists of information that can determine the cause of the error. Report all data in the error entry to IBM Storage Protect Support.

ADSM_DD_LOG6 (0xBC539B26)

WARNING OR INFORMATIONAL MESSAGE FOR TARGET DEVICE

This error is logged by the IBM Storage Protect device driver after receiving a warning or informational message from a device in response to a SCSI I/O command. These warning or informational messages might not be an indication of a problem. They could be an indication that cleaning is completed, that the cleaning cartridge is inserted, or something similar. If the message persists, report it to IBM Storage Protect Support.

Detail Data: Sense Data

The sense data consists of information that can determine the reason for the message. Report all data in the entry to IBM Storage Protect Support.

Appendix A. Accessibility features for the IBM Storage Protect product family

Accessibility features assist users who have a disability, such as restricted mobility or limited vision, to use information technology content successfully.

Overview

The IBM Storage Protect family of products includes the following major accessibility features:

- Keyboard-only operation
- Operations that use a screen reader

The IBM Storage Protect family of products uses the latest W3C Standard, WAI-ARIA 1.0 (www.w3.org/TR/wai-aria/), to ensure compliance with US Section 508 and Web Content Accessibility Guidelines (WCAG) 2.0 (www.w3.org/TR/WCAG20/). To take advantage of accessibility features, use the latest release of your screen reader and the latest web browser that is supported by the product.

The product documentation in IBM Documentation is enabled for accessibility.

Keyboard navigation

This product uses standard navigation keys.

Interface information

User interfaces do not have content that flashes 2 - 55 times per second.

Web user interfaces rely on cascading style sheets to render content properly and to provide a usable experience. The application provides an equivalent way for low-vision users to use system display settings, including high-contrast mode. You can control font size by using the device or web browser settings.

Web user interfaces include WAI-ARIA navigational landmarks that you can use to quickly navigate to functional areas in the application.

Vendor software

The IBM Storage Protect product family includes certain vendor software that is not covered under the IBM license agreement. IBM makes no representation about the accessibility features of these products. Contact the vendor for accessibility information about its products.

Related accessibility information

In addition to standard IBM help desk and support websites, IBM has a TTY telephone service for use by deaf or hard of hearing customers to access sales and support services:

TTY service
800-IBM-3383 (800-426-3383)
(within North America)

For more information about the commitment that IBM has to accessibility, see [IBM Accessibility](http://www.ibm.com/able) (www.ibm.com/able).

Notices

This information was developed for products and services offered in the US. This material might be available from IBM in other languages. However, you may be required to own a copy of the product or product version in that language in order to access it.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan*

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US*

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows: © (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_.

Trademarks

IBM, the IBM logo, and ibm.com® are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at "Copyright and trademark information" at www.ibm.com/legal/copytrade.shtml.

Adobe is a registered trademark of Adobe Systems Incorporated in the United States, and/or other countries.

Linear Tape-Open, LTO, and Ultrium are trademarks of HP, IBM Corp. and Quantum in the U.S. and other countries.

Intel and Itanium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

The registered trademark Linux® is used pursuant to a sublicense from the Linux Foundation, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis.

Microsoft, Windows, and Windows NT are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java™ and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Red Hat®, OpenShift®, Ansible®, and Ceph® are trademarks or registered trademarks of Red Hat, Inc. or its subsidiaries in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

VMware, VMware vCenter Server, and VMware vSphere are registered trademarks or trademarks of VMware, Inc. or its subsidiaries in the United States and/or other jurisdictions.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

Privacy policy considerations

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

This Software Offering does not use cookies or other technologies to collect personally identifiable information.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at <http://www.ibm.com/privacy> and IBM's Online Privacy Statement at <http://www.ibm.com/privacy/details> in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at <http://www.ibm.com/software/info/product-privacy>.

Glossary

A glossary is available with terms and definitions for the IBM Storage Protect family of products.

See the [IBM Storage Protect glossary](#).



Product Number: 5725-W98
5725-W99
5725-X15
5725-X18