

Parcel Carrier: Adapter Guide

Release 9.0

March 2010



Copyright Notice

Copyright © 1999 - 2010

Sterling Commerce, Inc.

ALL RIGHTS RESERVED

STERLING COMMERCE SOFTWARE

TRADE SECRET NOTICE

THE STERLING COMMERCE SOFTWARE DESCRIBED BY THIS DOCUMENTATION ("STERLING COMMERCE SOFTWARE") IS THE CONFIDENTIAL AND TRADE SECRET PROPERTY OF STERLING COMMERCE, INC., ITS AFFILIATED COMPANIES OR ITS OR THEIR LICENSORS, AND IS PROVIDED UNDER THE TERMS OF A LICENSE AGREEMENT. NO DUPLICATION OR DISCLOSURE WITHOUT PRIOR WRITTEN PERMISSION. RESTRICTED RIGHTS.

This documentation, the Sterling Commerce Software it describes, and the information and know-how they contain constitute the proprietary, confidential and valuable trade secret information of Sterling Commerce, Inc., its affiliated companies or its or their licensors, and may not be used for any unauthorized purpose, or disclosed to others without the prior written permission of the applicable Sterling Commerce entity. This documentation and the Sterling Commerce Software that it describes have been provided pursuant to a license agreement that contains prohibitions against and/or restrictions on their copying, modification and use. Duplication, in whole or in part, if and when permitted, shall bear this notice and the Sterling Commerce, Inc. copyright notice.

U.S. GOVERNMENT RESTRICTED RIGHTS. This documentation and the Sterling Commerce Software it describes are "commercial items" as defined in 48 C.F.R. 2.101. As and when provided to any agency or instrumentality of the U.S. Government or to a U.S. Government prime contractor or a subcontractor at any tier ("Government Licensee"), the terms and conditions of the customary Sterling Commerce commercial license agreement are imposed on Government Licensees per 48 C.F.R. 12.212 or 227.7202 through 227.7202-4, as applicable, or through 48 C.F.R. § 52.244-6.

This Trade Secret Notice, including the terms of use herein is governed by the laws of the State of Ohio, USA, without regard to its conflict of laws provisions. If you are accessing the Sterling Commerce Software under an executed agreement, then nothing in these terms and conditions supersedes or modifies the executed agreement.

Sterling Commerce, Inc.
4600 Lakehurst Court
Dublin, Ohio 43016-2000

Copyright © 1999 - 2010

Third-Party Software

Portions of the Sterling Commerce Software may include products, or may be distributed on the same storage media with products, ("Third Party Software") offered by third parties ("Third Party Licensors"). Sterling Commerce Software may include Third Party Software covered by the following copyrights: Copyright © 2006-2008 Andres Almiray. Copyright © 1999-2005 The Apache Software Foundation. Erik Arvidsson. Copyright © 2008 Azer Koçulu <http://azer.kodfabrik.com>. Copyright © Einar Lielmanis, einars@gmail.com. Copyright © 2006 John Reilly (www.inconspicuous.org) and Copyright © 2002 Douglas Crockford (www.crockford.com). Copyright © 2009 John Resig, <http://jquery.com/>. Copyright © 2006-2008 Json-lib. Copyright © 2001 LOOX Software, Inc. Copyright © 2003-2008 Luck Consulting Pty. Ltd. Copyright 2002-2004 © MetaStuff, Ltd. Copyright © 2009 Michael Mathews micmath@gmail.com. Copyright © 1999-2005 Northwoods Software Corporation. Copyright © Microsoft Corp. 1981-1998. Purple Technology, Inc. Copyright © 2004-2008 QOS.ch. Copyright © 2005 Sabre Airline Solutions. Copyright © 2004 SoftComplex, Inc. Copyright © 2000-2007 Sun Microsystems, Inc. Copyright © 2001 VisualSoft Technologies Limited. Copyright © 2001 Zero G Software, Inc. All rights reserved by all listed parties.

The Sterling Commerce Software is distributed on the same storage media as certain Third Party Software covered by the following copyrights: Copyright © 1999-2006 The Apache Software Foundation. Copyright © 2001-2003 Ant-Contrib project. Copyright © 1998-2007 Bela Ban. Copyright © 2005 Eclipse Foundation. Copyright © 2002-2006 Julian Hyde and others. Copyright © 1997 ICE Engineering, Inc./Timothy Gerard Endres. Copyright 2000, 2006 IBM Corporation and others. Copyright © 1987-2006 ILOG, Inc. Copyright © 2000-2006 Infragistics. Copyright © 2002-2005 JBoss, Inc. Copyright LuMriX.net GmbH, Switzerland. Copyright © 1998-2009 Mozilla.org. Copyright © 2003-2009 Mozdev Group, Inc. Copyright © 1999-2002 JBoss.org. Copyright © 2007, the OWASP Foundation. Copyright Raghu K, 2003. Copyright © 2004 David Schweinsberg. Copyright © 2005-2006 Darren L. Spurgeon. Copyright © 2005-2008 Sam Stephenson. Copyright © S.E. Morris (FISH) 2003-04. Copyright © 1998 Regents of the University of California. Copyright © 2006 VisualSoft Technologies. Copyright © 2002-2009 Zipwise Software. All rights reserved by all listed parties.

Third Party Software which is included, or are distributed on the same storage media with, the Sterling Commerce Software where use, duplication, or disclosure by the United States government or a government contractor or subcontractor, are provided with RESTRICTED RIGHTS under Title 48 CFR 2.101, 12.212, 52.227-19, 227.7201 through 227.7202-4, DFAR 252.227-7013(c) (1) (ii) and (2), DFAR 252.227-7015(b)(6/95), DFAR 227.7202-3(a), FAR 52.227-14(g)(2)(6/87), and FAR 52.227-19(c)(2) and (6/87) as applicable.

Additional information regarding certain Third Party Software is located at `installdir/SCI_License.txt`.

Some Third Party Licensors also provide license information and/or source code for their software via their respective links set forth below:

<http://danadler.com/jacob/>

<http://www.dom4j.org>

This product includes software developed by the Apache Software Foundation (<http://www.apache.org>). This product includes software developed by the Ant-Contrib project (<http://sourceforge.net/projects/ant-contrib>). This product includes software developed by the JDOM Project (<http://www.jdom.org/>). This product includes code licensed from RSA Data Security (via Sun Microsystems, Inc.). Sun, Sun Microsystems, the Sun Logo, Java, JDK, the Java Coffee Cup logo, JavaBeans, JDBC, JMX and all JMX based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. All other trademarks and logos are trademarks of their respective owners.

THE APACHE SOFTWARE FOUNDATION SOFTWARE

The Sterling Commerce Software is distributed with or on the same storage media as the following software products (or components thereof) and java source code files: Xalan version 2.5.2, Cookie.java, Header.java, HeaderElement.java, HttpException.java, HttpState.java, NameValuePair.java, CronTimeTrigger.java, DefaultTimeScheduler.java, PeriodicTimeTrigger.java, Target.java, TimeScheduledEntry.java, TimeScheduler.java, TimeTrigger.java, Trigger.java, BinaryHeap.java,

PriorityQueue.java, SynchronizedPriorityQueue.java, GetOpt.java, GetOptsException.java, IllegalArgumentException.java, MissingOptArgException.java (collectively, "Apache 1.1 Software"). Apache 1.1 Software is free software which is distributed under the terms of the following license:

License Version 1.1

Copyright 1999-2003 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistribution in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgement: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org>)." Alternatively, this acknowledgement may appear in the software itself, if and whenever such third-party acknowledgements normally appear.
4. The names "Commons", "Jakarta", "The Jakarta Project", "HttpClient", "log4j", "Xerces "Xalan", "Avalon", "Apache Avalon", "Avalon Cornerstone", "Avalon Framework", "Apache" and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without specific prior written permission. For written permission, please contact apache@apache.org.
5. Products derived from this software may not be called "Apache", nor may "Apache" appear in their name, without the prior written permission of the Apache Software Foundation.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation. The GetOpt.java, GetOptsException.java, IllegalArgumentException.java and MissingOptArgException.java software was originally based on software copyright © 2001, Sun Microsystems, <http://www.sun.com>. For more information on the Apache Software Foundation, please s

The preceding license only applies to the Apache 1.1 Software and does not apply to the Sterling Commerce Software or to any other Third Party Software.

The Sterling Commerce Software is also distributed with or on the same storage media as the following software products (or components thereof): Ant, Antinstaller, Apache File Upload Package, Apache Commons Beans, Apache Commons BetWixt, Apache Commons Collection, Apache Commons Digester, Apache Commons IO, Apache Commons Lang., Apache Commons Logging, Apache Commons Net, Apache Jakarta Commons Pool, Apache Jakarta ORO, Lucene, Xerces version 2.7, Apache Log4J, Apache SOAP, Apache Struts and Apache Xalan 2.7.0, (collectively, "Apache 2.0 Software"). Apache 2.0 Software is free software which is distributed under the terms of the Apache License Version 2.0. A copy of License Version 2.0 is found in the following directory files for the individual pieces of the Apache 2.0 Software: `installdir/jar/commons_upload/1_0/ CommonsFileUpload_License.txt`, `installdir/jar/jetspeed/1_4/RegExp_License.txt`, `installdir/ant/Ant_License.txt`, `<install>/jar/antInstaller/0_8/antinstaller_License.txt`, `<install>/jar/commons_beanutils/1_7_0/commons-beanutils.jar (/META-INF/LICENSE.txt)`, `<install>/jar/commons_betwixt/0_8/commons-betwixt-0.8.jar (/META-INF/LICENSE.txt)`, `<install>/jar/commons_collections/3_2/LICENSE.txt`, `<install>/jar/commons_digester/1_8/commons-digester-1.8.jar (/META-INF/LICENSE.txt)`

```

<install>/jar/commons_io/1_4/LICENSE.txt
<install>/jar/commons_lang/2_1/Commons_Lang_License.txt
<install>/jar/commons_logging/1_0_4/commons-logging-1.0.4.jar (/META-INF/LICENSE.txt)
<install>/jar/commons_net/1_4_1/commons-net-1.4.1.jar (/META-INF/LICENSE.txt)
<install>/jar/smcfs/9.0/lucene-core-2.4.0.jar (/META-INF/LICENSE.txt)
<install>/jar/struts/2_0_11/struts2-core-2.0.11.jar (./LICENSE.txt)
<install>/jar/mesa/gisdav/WEB-INF/lib/Slide_License.txt
<install>/mesa/studio/plugins/xerces_2.7_license.txt
<install>/jar/commons_pool/1_2/Commons_License.txt
<install>/jar/jakarta_oro/2_0_8/JakartaOro_License.txt
<install>/jar/log4j/1_2_15/LOG4J_License.txt
<install>/jar/xalan/2_7/Xalan_License.txt
<install>/jar/soap/2_3_1/Apache_SOAP_License.txt

```

Unless otherwise stated in a specific directory, the Apache 2.0 Software was not modified. Neither the Sterling Commerce Software, modifications, if any, to Apache 2.0 Software, nor other Third Party Code is a Derivative Work or a Contribution as defined in License Version 2.0. License Version 2.0 applies only to the Apache 2.0 Software which is the subject of the specific directory file and does not apply to the Sterling Commerce Software or to any other Third Party Software. License Version 2.0 includes the following provision:

"Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License."

NOTICE file corresponding to the section 4 d of the Apache License, Version 2.0, in this case for the Apache Ant distribution. Apache Ant Copyright 1999-2008 The Apache Software Foundation. This product includes software developed by The Apache Software Foundation (<http://www.apache.org/>). This product includes also software developed by:

- the W3C consortium (<http://www.w3c.org>)
- the SAX project (<http://www.saxproject.org>)

The <sync> task is based on code Copyright © 2002, Landmark Graphics Corp that has been kindly donated to the Apache Software Foundation.

Portions of this software were originally based on the following:

- software copyright © 1999, IBM Corporation., <http://www.ibm.com>.
- software copyright © 1999, Sun Microsystems., <http://www.sun.com>.
- voluntary contributions made by Paul Eng on behalf of the Apache Software Foundation that were originally developed at iClick, Inc., software copyright © 1999.

NOTICE file corresponding to the section 4 d of the Apache License, Version 2.0, in this case for the Apache Lucene distribution. Apache Lucene Copyright 2006 The Apache Software Foundation. This product includes software developed by The Apache Software Foundation (<http://www.apache.org/>). The snowball stemmers in contrib/snowball/src/java/net/sf/snowball were developed by Martin Porter and Richard Boulton. The full snowball package is available from <http://snowball.tartarus.org/>

Ant-Contrib Software

The Sterling Commerce Software is distributed with or on the same storage media as the Anti-Contrib software (Copyright © 2001-2003 Ant-Contrib project. All rights reserved.) (the "Ant-Contrib Software"). The Ant-Contrib Software is free software which is distributed under the terms of the following license:

The Apache Software License, Version 1.1

Copyright © 2001-2003 Ant-Contrib project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided

that the following conditions are met:

- 1.Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2.Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgement:

"This product includes software developed by the Ant-Contrib project (<http://sourceforge.net/projects/ant-contrib>)."

Alternately, this acknowledgement may appear in the software itself, if and wherever such third-party acknowledgements normally appear.

4. The name Ant-Contrib must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact ant-contrib-developers@lists.sourceforge.net.

5. Products derived from this software may not be called "Ant-Contrib" nor may "Ant-Contrib" appear in their names without prior written permission of the Ant-Contrib project.

THIS SOFTWARE IS PROVIDED ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE ANT-CONTRIB PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The preceding license only applies to the Ant-Contrib Software and does not apply to the Sterling Commerce Software or to any other Third Party Software.

ANTISAMY SOFTWARE

The Sterling Commerce Software is distributed with or on the same storage media as the AntiSamy software (Copyright © 1998 Regents of the University of California. All rights reserved.) (the "AntiSamy Software"). The AntiSamy Software is free software which is distributed under the terms of the following license:

Copyright © 1998, Regents of the University of California

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the <ORGANIZATION> nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL

THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

COOLBUTTONS SOFTWARE

The Sterling Commerce Software is also distributed with or on the same storage media as Coolbuttons.js ("Coolbuttons Software"), which is subject to the following license:

This Button Script was designed by Erik Arvidsson for WebFX. For more info and examples see: <http://webfx.eae.net> or send email to erik@eae.net. Feel free to use this code as long as this disclaimer is intact.

The preceding license only applies to the Coolbuttons Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

DOM4J Software

The Sterling Commerce Software is distributed with or on the same storage media as the Dom4h Software which is free software distributed under the terms of the following license:

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

- 1.Redistributions of source code must retain copyright statements and notices. Redistributions must also contain a copy of this document.
- 2.Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3.The name "DOM4J" must not be used to endorse or promote products derived from this Software without prior written permission of MetaStuff, Ltd. For written permission, please contact dom4j-info@metastuff.com.
- 4.Products derived from this Software may not be called "DOM4J" nor may "DOM4J" appear in their names without prior written permission of MetaStuff, Ltd. DOM4J is a registered trademark of MetaStuff, Ltd.
- 5.Due credit should be given to the DOM4J Project - <http://www.dom4j.org>

THIS SOFTWARE IS PROVIDED BY METASTUFF, LTD. AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL METASTUFF, LTD. OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2001-2004 © MetaStuff, Ltd. All Rights Reserved.

The preceding license only applies to the Dom4j Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

THE ECLIPSE SOFTWARE FOUNDATION

The Sterling Commerce Software is also distributed with or on the same storage media as the following software:

com.ibm.icu.nl1_3.4.4.v200606220026.jar, org.eclipse.ant.core.nl1_3.1.100.v200606220026.jar, org.eclipse.ant.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.compare.nl1_3.2.0.v200606220026.jar, org.eclipse.core.boot.nl1_3.1.100.v200606220026.jar, org.eclipse.core.commands.nl1_3.2.0.v200606220026.jar, org.eclipse.core.contenttype.nl1_3.2.0.v200606220026.jar, org.eclipse.core.expressions.nl1_3.2.0.v200606220026.jar, org.eclipse.core.filebuffers.nl1_3.2.0.v200606220026.jar, org.eclipse.core.filesystem.nl1_1.0.0.v200606220026.jar, org.eclipse.core.jobs.nl1_3.2.0.v200606220026.jar, org.eclipse.core.resources.nl1_3.2.0.v200606220026.jar, org.eclipse.core.runtime.compatibility.auth.nl1_3.2.0.v200606220026.jar, org.eclipse.core.runtime.compatibility.nl1_3.1.100.v200606220026.jar, org.eclipse.core.runtime.nl1_3.2.0.v200606220026.jar, org.eclipse.core.variables.nl1_3.1.100.v200606220026.jar, org.eclipse.debug.core.nl1_3.2.0.v200606220026.jar, org.eclipse.debug.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.equinox.common.nl1_3.2.0.v200606220026.jar, org.eclipse.equinox.preferences.nl1_3.2.0.v200606220026.jar, org.eclipse.equinox.registry.nl1_3.2.0.v200606220026.jar, org.eclipse.help.appserver.nl1_3.1.100.v200606220026.jar, org.eclipse.help.base.nl1_3.2.0.v200606220026.jar, org.eclipse.help.nl1_3.2.0.v200606220026.jar, org.eclipse.help.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.appt.core.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.appt.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.core.manipulation.nl1_1.0.0.v200606220026.jar, org.eclipse.jdt.core.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.debug.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.doc.isv.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.doc.user.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.junit4.runtime.nl1_1.0.0.v200606220026.jar, org.eclipse.jdt.launching.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.nl1_3.2.0.v200606220026.jar, org.eclipse.jdt.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.jface.databinding.nl1_1.0.0.v200606220026.jar, org.eclipse.jface.nl1_3.2.0.v200606220026.jar, org.eclipse.jface.text.nl1_3.2.0.v200606220026.jar, org.eclipse.ltk.core.refactoring.nl1_3.2.0.v200606220026.jar, org.eclipse.ltk.ui.refactoring.nl1_3.2.0.v200606220026.jar, org.eclipse.osgi.nl1_3.2.0.v200606220026.jar, org.eclipse.osgi.services.nl1_3.1.100.v200606220026.jar, org.eclipse.osgi.util.nl1_3.1.100.v200606220026.jar, org.eclipse.pde.core.nl1_3.2.0.v200606220026.jar, org.eclipse.pde.doc.user.nl1_3.2.0.v200606220026.jar, org.eclipse.pde.junit.runtime.nl1_3.2.0.v200606220026.jar, org.eclipse.pde.nl1_3.2.0.v200606220026.jar, org.eclipse.pde.runtime.nl1_3.2.0.v200606220026.jar, org.eclipse.pde.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.platform.doc.isv.nl1_3.2.0.v200606220026.jar, org.eclipse.platform.doc.user.nl1_3.2.0.v200606220026.jar, org.eclipse.rcp.nl1_3.2.0.v200606220026.jar, org.eclipse.search.nl1_3.2.0.v200606220026.jar, org.eclipse.swt.nl1_3.2.0.v200606220026.jar, org.eclipse.team.core.nl1_3.2.0.v200606220026.jar, org.eclipse.team.cvs.core.nl1_3.2.0.v200606220026.jar, org.eclipse.team.cvs.ssh.nl1_3.2.0.v200606220026.jar, org.eclipse.team.cvs.ssh2.nl1_3.2.0.v200606220026.jar, org.eclipse.team.cvs.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.team.ui.nl1_3.2.0.v200606220026.jar, org.eclipse.text.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.browser.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.cheatsheets.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.console.nl1_3.1.100.v200606220026.jar, org.eclipse.ui.editors.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.externaltools.nl1_3.1.100.v200606220026.jar, org.eclipse.ui.forms.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.ide.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.intro.nl1_3.2.0.v200606220026.jar, org.eclipse.ui.navigator.nl1_3.2.0.v200606220026.jar,

org.eclipse.ui.navigator.resources.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.presentations.r21.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.views.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.views.properties.tabbed.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.workbench.nl1_3.2.0.v200606220026.jar,
org.eclipse.ui.workbench.texteditor.nl1_3.2.0.v200606220026.jar,
org.eclipse.update.configurator.nl1_3.2.0.v200606220026.jar,
org.eclipse.update.core.nl1_3.2.0.v200606220026.jar,
org.eclipse.update.scheduler.nl1_3.2.0.v200606220026.jar,
org.eclipse.update.ui.nl1_3.2.0.v200606220026.jar,
com.ibm.icu_3.4.4.1.jar,
org.eclipse.core.commands_3.2.0.I20060605-1400.jar,
org.eclipse.core.contenttype_3.2.0.v20060603.jar,
org.eclipse.core.expressions_3.2.0.v20060605-1400.jar,
org.eclipse.core.filesystem.linux.x86_1.0.0.v20060603.jar,
org.eclipse.core.filesystem_1.0.0.v20060603.jar, org.eclipse.core.jobs_3.2.0.v20060603.jar,
org.eclipse.core.runtime.compatibility.auth_3.2.0.v20060601.jar,
org.eclipse.core.runtime_3.2.0.v20060603.jar, org.eclipse.equinox.common_3.2.0.v20060603.jar,
org.eclipse.equinox.preferences_3.2.0.v20060601.jar, org.eclipse.equinox.registry_3.2.0.v20060601.jar,
org.eclipse.help_3.2.0.v20060602.jar, org.eclipse.jface.text_3.2.0.v20060605-1400.jar,
org.eclipse.jface_3.2.0.I20060605-1400.jar, org.eclipse.osgi_3.2.0.v20060601.jar,
org.eclipse.swt.gtk.linux.x86_3.2.0.v3232m.jar, org.eclipse.swt_3.2.0.v3232o.jar,
org.eclipse.text_3.2.0.v20060605-1400.jar,
org.eclipse.ui.workbench.texteditor_3.2.0.v20060605-1400.jar,
org.eclipse.ui.workbench_3.2.0.I20060605-1400.jar, org.eclipse.ui_3.2.0.I20060605-1400.jar,
runtime_registry_compatibility.jar, eclipse.exe, eclipse.ini, and startup.jar
(collectively, "Eclipse Software").

All Eclipse Software is distributed under the terms and conditions of the Eclipse Foundation Software User Agreement (EFSUA) and/or terms and conditions of the Eclipse Public License Version 1.0 (EPL) or other license agreements, notices or terms and conditions referenced for the individual pieces of the Eclipse Software, including without limitation "Abouts", "Feature Licenses", and "Feature Update Licenses" as defined in the EFSUA.

A copy of the Eclipse Foundation Software User Agreement is found at
<install_dir>/SI/repository/rcp/rcpdependencies/windows/eclipse/notice.html,
<install_dir>/SI/repository/rcp/rcpdependencies/windows/eclipse/plugins/notice.html,
<install_dir>/SI/repository/rcp/rcpdependencies/gtk.linux.x86/eclipse/notice.html, and
<install_dir>/SI/repository/rcp/rcpdependencies/gtk.linux.x86/eclipse/plugins/notice.html.

A copy of the EPL is found at
<install_dir>/SI/repository/rcp/rcpdependencies/windows/eclipse/plugins/epl-v10.htm,
<install_dir>/SI/repository/rcp/rcpdependencies/windows/eclipse/epl-v10.htm,
<install_dir>/SI/repository/rcp/rcpdependencies/gtk.linux.x86/eclipse/plugins/epl-v10.html, and
<install_dir>/SI/repository/rcp/rcpdependencies/gtk.linux.x86/eclipse/epl-v10.html.

The reference to the license agreements, notices or terms and conditions governing each individual piece of the Eclipse Software is found in the directory files for the individual pieces of the Eclipse Software as described in the file identified as installDir/SCI_License.txt.

These licenses only apply to the Eclipse Software and do not apply to the Sterling Commerce Software, or any other Third Party Software.

The Language Pack (NL Pack) piece of the Eclipse Software, is distributed in object code form. Source code is available at http://archive.eclipse.org/eclipse/downloads/drops/L-3.2_Language_Packs-200607121700/index.php. In the event the source code is no longer available from the website referenced above, contact Sterling Commerce at 978-513-6000 and ask for the Release Manager. A copy of this license is located at <install_dir>/SI/repository/rcp/rcpdependencies/windows/eclipse/plugins/epl-v10.htm and <install_dir>/SI/repository/rcp/rcpdependencies/gtk.linux.x86/eclipse/plugins/epl-v10.html.

The org.eclipse.core.runtime_3.2.0.v20060603.jar piece of the Eclipse Software was modified slightly in order to remove classes containing encryption items. The org.eclipse.core.runtime_3.2.0.v20060603.jar was modified to remove the Cipher, CipherInputStream and CipherOutputStream classes and rebuild the org.eclipse.core.runtime_3.2.0.v20060603.jar.

Ehcache Software

The Sterling Commerce Software is also distributed with or on the same storage media as the ehache v.1.5 software (Copyright © 2003-2008 Luck Consulting Pty. Ltd.) ("Ehache Software"). Ehcache Software is free software which is distributed under the terms of the Apache License Version 2.0. A copy of License Version 2.0 is found in <install>/jar/smcfcs/9.0/ehcache-1.5.0.jar (./LICENSE.txt).

The Ehcache Software was not modified. Neither the Sterling Commerce Software, modifications, if any, to the Ehcache Software, nor other Third Party Code is a Derivative Work or a Contribution as defined in License Version 2.0. License Version 2.0 applies only to the Ehcache Software which is the subject of the specific directory file and does not apply to the Sterling Commerce Software or to any other Third Party Software. License Version 2.0 includes the following provision:

"Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License."

ESAPI SOFTWARE

The Sterling Commerce Software is also distributed with or on the same storage media as the ESAPI software (Copyright © 2007, the OWASP Foundation) ("ESAPI Software"). ESAPI Software is free software which is distributed under the terms of the following license:

Copyright © 2007, The OWASP Foundation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the OWASP Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

EZMorph Software

The Sterling Commerce Software is also distributed with or on the same storage media as the EZMorph v. 1.0.4 software (Copyright © 2006-2008 Andres Almiray) ("EZMorph Software"). EZMorph Software is free software which is distributed under the terms of the Apache License Version 2.0. A copy of License Version 2.0 is found in <install>/jar/ezmorph/1_0_4/ezmorph-1.0.4.jar (./LICENSE.txt).

The EZMorph Software was not modified. Neither the Sterling Commerce Software, modifications, if any, to the EZMorph Software, nor other Third Party Code is a Derivative Work or a Contribution as defined in License Version 2.0. License Version 2.0 applies only to the EZMorph Software which is the subject of the specific directory file and does not apply to the Sterling Commerce Software or to any other Third Party Software. License Version 2.0 includes the following provision:

"Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License."

Firebug Lite Software

The Sterling Commerce Software is distributed with or on the same storage media as the Firebug Lite Software which is free software distributed under the terms of the following license:

Copyright © 2008 Azer Koçulu <http://azer.kodfabrik.com>. All rights reserved.

Redistribution and use of this software in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Azer Koçulu. nor the names of any other contributors may be used to endorse or promote products derived from this software without specific prior written permission of Parakey Inc.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

JAVASCRIPT MINIFIER

The Sterling Commerce Software is distributed with or on the same storage media as the JSMin Software which is free software distributed under the terms of the following license:

JSMin.java 2006-02-13; Updated 2007-08-20 with updates from jsmin.c (2007-05-22)

Copyright © 2006 John Reilly (www.inconspicuous.org)

This work is a translation from C to Java of jsmin.c published by Douglas Crockford. Permission is hereby granted to use the Java version under the same conditions as the jsmin.c on which it is based.

jsmin.c 2003-04-21

Copyright © 2002 Douglas Crockford (www.crockford.com)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

The Software shall be used for Good, not Evil.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

ICE SOFTWARE

The Sterling Commerce Software is distributed on the same storage media as the ICE Software (Copyright © 1997 ICE Engineering, Inc./Timothy Gerard Endres.) ("ICE Software"). The ICE Software is independent from and not linked or compiled with the Sterling Commerce Software. The ICE Software is a free software product which can be distributed and/or modified under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License or any later version.

A copy of the GNU General Public License is provided at `install_dir/jar/jniregistry/1_2/ICE_License.txt`. This license only applies to the ICE Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

The ICE Software was modified slightly in order to fix a problem discovered by Sterling Commerce involving the RegistryKey class in the RegistryKey.java in the JNIRegistry.jar. The class was modified to comment out the finalize () method and rebuild of the JNIRegistry.jar file.

Source code for the bug fix completed by Sterling Commerce on January 8, 2003 is located at: `install_dir/jar/jniregistry/1_2/RegistryKey.java`. Source code for all other components of the ICE Software is located at <http://www.trustice.com/java/jnireg/index.shtml>.

The ICE Software is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

JBOSS SOFTWARE

The Sterling Commerce Software is distributed on the same storage media as the JBoss Software (Copyright © 1999-2002 JBoss.org) ("JBoss Software"). The JBoss Software is independent from and not linked or compiled with the Sterling Commerce Software. The JBoss Software is a free software product which can be distributed and/or modified under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License or any later version.

A copy of the GNU Lesser General Public License is provided at:
<install_dir>\jar\jboss\4_2_0\LICENSE.html

This license only applies to the JBoss Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

The JBoss Software is not distributed by Sterling Commerce in its entirety. Rather, the distribution is

limited to the following jar files: el-api.jar, jasper-compiler-5.5.15.jar, jasper-el.jar, jasper.jar, jboss-common-client.jar, jboss-j2ee.jar, jboss-jmx.jar, jboss-jsr77-client.jar, jbossmq-client.jar, jnpserver.jar, jsp-api.jar, servlet-api.jar, tomcat-juli.jar.

The JBoss Software was modified slightly in order to allow the ClientSocketFactory to return a socket connected to a particular host in order to control the host interfaces, regardless of whether the ClientSocket Factory specified was custom or not. Changes were made to org.jnp.server.Main. Details concerning this change can be found at http://sourceforge.net/tracker/?func=detail&aid=1008902&group_id=22866&atid=376687.

Source code for the modifications completed by Sterling Commerce on August 13, 2004 is located at: http://sourceforge.net/tracker/?func=detail&aid=1008902&group_id=22866&atid=376687. Source code for all other components of the JBoss Software is located at <http://www.jboss.org>.

JGO SOFTWARE

The Sterling Commerce Software is distributed with, or on the same storage media, as certain redistributable portions of the JGo Software provided by Northwoods Software Corporation under a commercial license agreement (the "JGo Software"). The JGo Software is provided subject to the disclaimers set forth above and the following notice:

U.S. Government Restricted Rights

The JGo Software and documentation are provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (C)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (C)(1) and (2) of the Commercial Computer Software - Restricted Rights at 48 CFR 52.227-19, as applicable. Contractor / manufacturer of the JGo Software is Northwoods Software Corporation, 142 Main St., Nashua, NH 03060.

JSDoc Toolkit Software

The Sterling Commerce Software is distributed with or on the same storage media as the JSDoc Toolkit software (Copyright © 2008 Michael Mathews) ("JSDoc Toolkit Software"), which is subject to the following license:

All code specific to JsDoc Toolkit are free, open source and licensed for use under the X11/MIT License.

JsDoc Toolkit is Copyright © 2008 Michael Mathews <micmath@gmail.com>

This program is free software; you can redistribute it and/or modify it under the terms below.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice must be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

JSLib Software

The Sterling Commerce Software is distributed with or on the same storage media as the JSLib software

product (Copyright © 2003-2009 Mozdev Group, Inc.) ("JSLib Software"). The JSLib Software is distributed under the terms of the MOZILLA PUBLIC LICENSE Version 1.1. A copy of this license is located at <install>/repository/eardata/platform_uifwk_ide/war/designer/MPL-1.1.txt. The JSLib Software code is distributed in source form and is located at <http://jslib.mozdev.org/installation.html>. Neither the Sterling Commerce Software nor any other Third Party Code is a Modification or Contribution subject to the Mozilla Public License. Pursuant to the terms of the Mozilla Public License, the following notice applies only to the JSLib Software (and not to the Sterling Commerce Software or any other Third Party Software):

"The contents of the file located at <http://www.mozdev.org/source/browse/jslib/> are subject to the Mozilla Public License Version 1.1 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.mozilla.org/MPL/>

Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

The Original Code is Mozdev Group, Inc. code. The Initial Developer of the Original Code is Mozdev Group, Inc. Portions created by Mozdev Group, Inc. are Copyright © 2003 Mozdev Group, Inc. All Rights Reserved. Original Author: Pete Collins <pete@mozdev.org>one Contributor(s): _____ none listed_____.

Alternatively, the contents of this file may be used under the terms of the _____ license (the "[_____] License"), in which case the provisions of [_____] License are applicable instead of those above. If you wish to allow use of your version of this file only under the terms of the [_____] License and not allow others to use your version of this file under the MPL, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the [_____] License. If you do not delete the provisions above, a recipient may use your version of this file under either the MPL or the [_____] License."

The preceding license only applies to the JSLib Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

Json Software

The Sterling Commerce Software is also distributed with or on the same storage media as the Json 2.2.2 software (Copyright © 2006-2008 Json-lib) ("Json Software"). Json Software is free software which is distributed under the terms of the Apache License Version 2.0. A copy of License Version 2.0 is found in <install>/jar/jsonlib/2_2_2/json-lib-2.2.2-jdk13.jar.

This product includes software developed by Douglas Crockford (<http://www.crockford.com>).

The Json Software was not modified. Neither the Sterling Commerce Software, modifications, if any, to the Json Software, nor other Third Party Code is a Derivative Work or a Contribution as defined in License Version 2.0. License Version 2.0 applies only to the Json Software which is the subject of the specific directory file and does not apply to the Sterling Commerce Software or to any other Third Party Software. License Version 2.0 includes the following provision:

"Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License."

Prototype Software

The Sterling Commerce Software is distributed with or on the same storage media as the Prototype software (Copyright © 2005-2008 Sam Stephenson) ("Prototype Software"), which is subject to the following license:

Copyright © 2005-2008 Sam Stephenson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Purple Technology

The Sterling Commerce Software is distributed with or on the same storage media as the Purple Technology Software (Copyright © 1995-1999 Purple Technology, Inc.) ("Purple Technology Software"), which is subject to the following license:

Copyright © 1995-1999 Purple Technology, Inc. All rights reserved.

PLAIN LANGUAGE LICENSE: Do whatever you like with this code, free of charge, just give credit where credit is due. If you improve it, please send your improvements to alex@purpletech.com. Check <http://www.purpletech.com/code/> for the latest version and news.

LEGAL LANGUAGE LICENSE: Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The names of the authors and the names "Purple Technology," "Purple Server" and "Purple Chat" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact server@purpletech.com.

THIS SOFTWARE IS PROVIDED BY THE AUTHORS AND PURPLE TECHNOLOGY "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR PURPLE TECHNOLOGY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The preceding license only applies to the Purple Technology Software and does not apply to the Sterling Commerce Software, or any other Third Party Software.

Rico Software

The Sterling Commerce Software is also distributed with or on the same storage media as the Rico.js software (Copyright © 2005 Sabre Airline Solutions) ("Rico Software"). Rico Software is free software which is distributed under the terms of the Apache License Version 2.0. A copy of License Version 2.0 is found in <install>/repository/eardata/platform/war/ajax/scripts/Rico_License.txt.

The Rico Software was not modified. Neither the Sterling Commerce Software, modifications, if any, to

the Rico Software, nor other Third Party Code is a Derivative Work or a Contribution as defined in License Version 2.0. License Version 2.0 applies only to the Rico Software which is the subject of the specific directory file and does not apply to the Sterling Commerce Software or to any other Third Party Software. License Version 2.0 includes the following provision:

"Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License."

Rhino Software

The Sterling Commerce Software is distributed with or on the same storage media as the Rhino.js.jar (Copyright © 1998-2009 Mozilla.org.) ("Rhino Software"). A majority of the source code for the Rhino Software is dual licensed under the terms of the MOZILLA PUBLIC LICENSE Version 1.1. or the GPL v. 2.0. Additionally, some files (at a minimum the contents of toolsrc/org/Mozilla/javascript/toolsdebugger/treetable) are available under another license as set forth in the directory file for the Rhino Software.

Sterling Commerce's use and distribution of the Rhino Software is under the Mozilla Public License. A copy of this license is located at <install>/jar/rhino/1_7R1/License.txt. The Rhino Software code is distributed in source form and is located at <http://mxr.mozilla.org/mozilla/source/js/rhino/src/>. Neither the Sterling Commerce Software nor any other Third Party Code is a Modification or Contribution subject to the Mozilla Public License. Pursuant to the terms of the Mozilla Public License, the following notice applies only to the Rhino Software (and not to the Sterling Commerce Software or any other Third Party Software):

"The contents of the file located at <install>/jar/rhino/1_7R1/js.jar are subject to the Mozilla Public License Version 1.1 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.mozilla.org/MPL/>

Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

The Original Code is Rhino code, released May 6, 1999. The Initial Developer is Netscape Communications Corporation. Portions created by the Initial Developer are Copyright © 1997-1999. All Rights Reserved. Contributor(s): _____ none listed.

The preceding license only applies to the Rico Software and does not apply to the Sterling Commerce Software, or any other Third Party Software

SLF4J Software

The Sterling Commerce Software is also distributed with or on the same storage media as the SLF4J software (Copyright © 2004-2008) ("SLF4J Software"), which is subject to the following license:

Copyright © 2004-2008 QOS.ch All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,

INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Sun Microsystems

The Sterling Commerce Software is distributed with or on the same storage media

as the following software products (or components thereof): Sun JMX, and Sun JavaMail (collectively, "Sun Software"). Sun Software is free software which is distributed under the terms of the licenses issued by Sun which are included in the directory files located at:

SUN COMM JAR -install/./jar/comm/2_0
SUN ACTIVATION JAR -install/./jar/jaf/1_0_2
SUN JavaMail -install/./jar/javamail/1_4

The Sterling Commerce Software is also distributed with or on the same storage media as the Web-app_2_3.dtd software (Copyright © 2007 Sun Microsystems, Inc.) ("Web-App Software"). Web-App Software is free software which is distributed under the terms of the Common Development and Distribution License ("CDDL"). A copy of
<install>/repository/eardata/platform/war/WEB-INF/web_app_license.txt.

The source code for the Web-App Software may be found at: <http://java.sun.com/dtd/>.

Such licenses only apply to the Sun product which is the subject of such directory and does not apply to the Sterling Commerce Software or to any other Third Party Software.

The Sterling Commerce Software is also distributed with or on the same storage media as the Sun Microsystems, Inc. Java (TM) look and feel Graphics Repository ("Sun Graphics Artwork"), subject to the following terms and conditions:

Copyright 2000 by Sun Microsystems, Inc. All Rights Reserved.

Sun grants you ("Licensee") a non-exclusive, royalty free, license to use, and redistribute this software graphics artwork, as individual graphics or as a collection, as part of software code or programs that you develop, provided that i) this copyright notice and license accompany the software graphics artwork; and ii) you do not utilize the software graphics artwork in a manner which is disparaging to Sun. Unless enforcement is prohibited by applicable law, you may not modify the graphics, and must use them true to color and unmodified in every way.

This software graphics artwork is provided "AS IS," without a warranty of any kind. ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE HEREBY EXCLUDED. SUN AND ITS LICENSORS SHALL NOT BE LIABLE FOR ANY DAMAGES SUFFERED BY LICENSEE AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE GRAPHICS ARTWORK.

IN NO EVENT WILL SUN OR ITS LICENSORS BE LIABLE FOR ANY LOST REVENUE, PROFIT OR DATA, OR FOR DIRECT, INDIRECT, SPECIAL, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF THE USE OF OR INABILITY TO USE SOFTWARE GRAPHICS ARTWORK, EVEN IF SUN HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

If any of the above provisions are held to be in violation of applicable law, void, or unenforceable in any jurisdiction, then such provisions are waived to the extent necessary for this Disclaimer to be otherwise enforceable in such jurisdiction.

The preceding license only applies to the Sun Graphics Artwork and does not apply to the Sterling Commerce Software, or any other Third Party Software.

WARRANTY DISCLAIMER

This documentation and the Sterling Commerce Software which it describes are licensed either "AS IS" or with a limited warranty, as set forth in the Sterling Commerce license agreement. Other than any limited warranties provided, NO OTHER WARRANTY IS EXPRESSED AND NONE SHALL BE IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE OR FOR A PARTICULAR PURPOSE. The applicable Sterling Commerce entity reserves the right to revise this publication from time to time and to make changes in the content hereof without the obligation to notify any person or entity of such revisions or changes.

The Third Party Software is provided "AS IS" WITHOUT ANY WARRANTY AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. FURTHER, IF YOU ARE LOCATED OR ACCESSING THIS SOFTWARE IN THE UNITED STATES, ANY EXPRESS OR IMPLIED WARRANTY REGARDING TITLE OR NON-INFRINGEMENT ARE DISCLAIMED.

Without limiting the foregoing, the ICE Software and JBoss Software are distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Contents

Intended Audience	xxiii
Structure	xxiii
Selling and Fulfillment Foundation Documentation	xxiv
Conventions	xxvi

1 Introduction

1.1 Technology Overview.....	1
1.1.1 Parcel Carrier Adapters Architecture.....	1
1.1.2 Printers.....	3
1.2 Functionality Overview	3
1.2.1 ConnectShip Compliance Functionality	4
1.2.2 FedEx Compliance Functionality	4
1.2.3 AgileElite Shipment Server Compliance Functionality.....	4

2 Parcel Carrier Adapters Technical Details

2.1 Introduction to the Parcel Carrier Adapters Tables	6
2.1.1 Configuration Tables.....	7
2.2 Parcel Carrier Adapters Integration Details	11
2.3 Field-Level Mapping for Carriers	11
2.3.1 Field-Level Mapping for ConnectShip.....	22
2.3.2 Field-Level Mapping for FedEx.....	30
2.3.3 Field-Level Mapping for Sterling Pierbridge Adaptor.....	32
2.4 Using User Exits.....	41

3 Configuring the Parcel Carrier Adapters

3.1	Setting Up the Parcel Carrier Adapters Properties	43
3.2	Standard Configurations Packaged	44
3.3	Pre-Configured Carriers	45
3.3.1	Federal Express (FedEx) Services and Special Services	45
3.3.2	United Parcel Service (UPS) Services and Special Services	46
3.3.2.1	United Parcel Service United States (UPSN)	46
3.3.2.2	United Parcel Service Canada (UPSC)	48
3.3.2.3	United Parcel Service Europe (UPSE)	48
3.3.2.4	United Parcel Service Asia Pacific (UPSA)	49
3.3.2.5	United Parcel Service Latin America (UPSL)	50
3.3.3	United States Postal Service (USPS) Services and Special Services	51
3.3.4	Purolator Services and Special Services	51

4 Integrating the Sterling Parcel Carrier Adapters with Carrier Servers

4.1	Integrating with ConnectShip	53
4.1.1	Installing the ConnectShip Toolkit	54
4.1.2	Configuring the ConnectShip Server	54
4.1.3	Printing Labels and Documents	55
4.1.4	Software Components	55
4.1.4.1	Open Manifest	55
4.1.4.2	Add Containers to Manifest	55
4.1.4.2.1	Shipping international Shipments	56
4.1.4.2.2	Shipments from Canada	57
4.1.4.2.3	Shipments from Europe	57
4.1.4.2.4	Shipments from APAC	57
4.1.4.2.5	Shipments from Latin America (including Mexico)	58
4.1.4.2.6	Printing and Saving UPS Labels	58
4.1.4.2.7	Printing Other Documents	61
4.1.4.2.8	Configuration Dependencies	61
4.1.4.3	Close Manifest	62
4.1.4.3.1	Configuration Dependencies	62
4.1.4.4	Remove Containers From Manifest	63

4.1.4.4.1	Configuration Dependencies.....	64
4.1.4.5	Print Container Labels.....	65
4.1.4.5.1	Configuration Dependencies.....	65
4.1.4.6	Reprint Container Labels	66
4.1.5	Adding New Carriers and Services to the Sterling ConnectShip Adaptor ..	66
4.1.5.1	Adding New Carriers to the Sterling ConnectShip Adaptor	66
4.1.5.2	Adding New Services to the Sterling ConnectShip Adaptor	68
4.2	Integrating with PowerShip.....	69
4.2.1	Software Components.....	69
4.2.1.1	Open Manifest.....	69
4.2.1.2	Add Containers to Manifest	69
4.2.1.2.1	Shipping International Shipments from USA.....	70
4.2.1.2.2	Printing and Saving FedEx Labels	71
4.2.1.2.3	Configuration Dependencies.....	72
4.2.1.3	Close Manifest	72
4.2.1.3.1	Configuration Dependencies.....	73
4.2.1.4	Remove Containers From Manifest.....	73
4.2.1.4.1	Configuration Dependencies.....	74
4.2.1.5	Print Container Labels.....	74
4.2.1.5.1	Configuration Dependencies.....	75
4.2.1.6	Reprint Container Labels	75
4.3	Integrating with the AgileElite Shipment Server.....	75
4.3.1	Installing the AgileElite Shipment Server	76
4.3.2	Configuring the AgileElite Shipment Server	76
4.3.3	Printing Labels and Documents	78
4.3.4	Software Components.....	79
4.3.4.1	Open Manifest.....	79
4.3.4.2	Add Containers to Manifest	79
4.3.4.2.1	Shipping International Shipments.....	79
4.3.4.2.2	Printing and Saving Labels.....	80
4.3.4.2.3	Printing Other Documents	82
4.3.4.3	Close a Manifest.....	83
4.3.4.4	Remove Containers From a Manifest	83
4.3.4.5	Print Container Labels.....	83
4.3.4.6	Reprint Container Labels	84

4.3.5	Adding New Carriers and Services to the Sterling Pierbridge Adaptor ..	84
4.3.5.1	Adding New Carriers to the Sterling Pierbridge Adaptor.....	85
4.3.5.2	Adding New Services to the Sterling Pierbridge Adaptor	85

5 Troubleshooting Connectivity Issues

5.1	Dumping inXML on the Parcel Carrier Adapters	87
5.2	SaxParseException Encountered While Manifesting a Container.....	87
5.3	FedEx Issues	88
5.3.1	Dumping the FedEx Input String.....	88
5.3.2	Dumping the FedEx Output String	88
5.3.3	Label Not Getting Printed	89
5.3.4	Label Not Getting Reprinted or Getting a "Tracking Number Not Found" Error When Reprinting	89
5.3.5	Unable to Compute Freight Charge Error	89
5.3.6	Unable to Manifest Containers of an International Shipment	90
5.3.7	Error Message is Displayed When Reprinting a Carrier Label	90
5.4	ConnectShip Issues	90
5.4.1	Manifesting Cartons that are Modified After Carrier Label Print.....	91
5.4.2	Closing a Manifest When Some Expected Cartons are Not Manifested .	91
5.5	AgileElite Shipment Server Issues.....	91

Index

Preface

This document describes how to use the Parcel Carrier Adapters, Release 9.0 (Carrier Adapter 9.0).

Intended Audience

This document is intended for use by application developers, system administrators, and users who use the Parcel Carrier Adapters to provide carrier-related functionalities in a central place.

Structure

This document contains the following sections:

Chapter 1, "Introduction"

This chapter introduces the Parcel Carrier Adapters and their architecture.

Chapter 2, "Parcel Carrier Adapters Technical Details"

This chapter describes the programming components of the Parcel Carrier Adapters.

Chapter 3, "Configuring the Parcel Carrier Adapters"

This chapter provides a detailed description about configuring the Parcel Carrier Adapters.

Chapter 4, "Integrating the Sterling Parcel Carrier Adapters with Carrier Servers"

This chapter describes the integration of the Parcel Carrier Adapters with carrier servers, ConnectShip™, PowerShip, and AgileElite shipment server.

Chapter 5, "Troubleshooting Connectivity Issues"

This chapter provides information for solving problems that can occur using the Parcel Carrier Adapters.

Selling and Fulfillment Foundation Documentation

For more information about Selling and Fulfillment Foundation components, see the following manuals:

- *Selling and Fulfillment Foundation: Release Notes*
- *Selling and Fulfillment Foundation: Installation Guide*
- *Selling and Fulfillment Foundation: Upgrade Guide*
- *Selling and Fulfillment Foundation: Configuration Deployment Tool Guide*
- *Selling and Fulfillment Foundation: Performance Management Guide*
- *Selling and Fulfillment Foundation: High Availability Guide*
- *Selling and Fulfillment Foundation: System Management Guide*
- *Selling and Fulfillment Foundation: Localization Guide*
- *Selling and Fulfillment Foundation: Customization Basics Guide*
- *Selling and Fulfillment Foundation: Customizing APIs Guide*
- *Selling and Fulfillment Foundation: Customizing Console JSP Interface for End User Guide*
- *Selling and Fulfillment Foundation: Customizing the RCP Interface Guide*
- *Selling and Fulfillment Foundation: Customizing User Interfaces for Mobile Devices Guide*

- *Selling and Fulfillment Foundation: Customizing Web UI Framework Guide*
- *Selling and Fulfillment Foundation: Customizing Swing Interface Guide*
- *Selling and Fulfillment Foundation: Extending the Condition Builder Guide*
- *Selling and Fulfillment Foundation: Extending the Database Guide*
- *Selling and Fulfillment Foundation: Extending Transactions Guide*
- *Selling and Fulfillment Foundation: Using Sterling RCP Extensibility Tool Guide*
- *Selling and Fulfillment Foundation: Integration Guide*
- *Selling and Fulfillment Foundation: Product Concepts Guide*
- *Sterling Warehouse Management™ System: Concepts Guide*
- *Selling and Fulfillment Foundation: Application Platform Configuration Guide*
- *Sterling Distributed Order Management™: Configuration Guide*
- *Sterling Supply Collaboration: Configuration Guide*
- *Sterling Global Inventory Visibility™: Configuration Guide*
- *Catalog Management™: Configuration Guide*
- *Sterling Logistics Management: Configuration Guide*
- *Sterling Reverse Logistics™: Configuration Guide*
- *Sterling Warehouse Management System: Configuration Guide*
- *Selling and Fulfillment Foundation: Application Platform User Guide*
- *Sterling Distributed Order Management: User Guide*
- *Sterling Supply Collaboration: User Guide*
- *Sterling Global Inventory Visibility: User Guide*
- *Sterling Logistics Management: User Guide*
- *Sterling Reverse Logistics: User Guide*
- *Sterling Warehouse Management System: User Guide*

- *Selling and Fulfillment Foundation: Mobile Application User Guide*
- *Selling and Fulfillment Foundation: Business Intelligence Guide*
- *Selling and Fulfillment Foundation: Javadocs*
- *Sterling Selling and Fulfillment Suite™: Glossary*
- *Parcel Carrier: Adapter Guide*
- *Visual Modeler™: Application Guide*
- *Selling and Fulfillment Foundation: Multitenant Enterprise Guide*
- *Selling and Fulfillment Foundation: Password Policy Management Guide*
- *Selling and Fulfillment Foundation: Properties Guide*
- *Catalog Management: Concepts Guide*
- *Selling and Fulfillment Foundation: Pricing Concepts Guide*
- *Selling and Fulfillment Foundation: Setting Up Quotes*
- *Sterling Sensitive Data Capture Server, Release 1.0: Configuration Guide*
- *Sterling Sensitive Data Capture Server, Release 1.0: PA-DSS Implementation Guide*
- *Selling and Fulfillment Foundation: Secure Deployment Guide*
- *Business Center: Item Administration Guide*
- *Business Center: Pricing Administration Guide*
- *Business Center: Customization Guide*
- *Business Center: Localization Guide*

Conventions

The following conventions may be used in this manual:

Convention	Meaning
. . .	Ellipsis represents information that has been omitted.
< >	Angle brackets indicate user-supplied input.

Convention	Meaning
mono-spaced text	Mono-spaced text indicates a file name, directory path, attribute name, or an inline code example or command.
/ or \	Slashes and backslashes are file separators for Windows, UNIX, and Linux operating systems. The file separator for the Windows operating system is "\" and the file separator for UNIX and Linux systems is "/". The UNIX convention is used unless otherwise mentioned.
<INSTALL_DIR>	User-supplied location of the Selling and Fulfillment Foundation installation directory. This is only applicable for Release 8.0 and later.
<INSTALL_DIR_OLD>	User-supplied location of the Selling and Fulfillment Foundation installation directory (for Release 8.0 and later). Note: This is applicable only for users upgrading from Release 8.0 and later.
<SSDCS_DIR>	User-supplied location of the Sterling Sensitive Data Capture Server installation directory. This is applicable for Selling and Fulfillment Foundation, Release 9.0 and later.
<YANTRA_HOME>	User-supplied location of the Sterling Supply Chain Applications installation directory. This is only applicable for Releases 7.7, 7.9, and 7.11.
<YANTRA_HOME_OLD>	User-supplied location of the Sterling Supply Chain Applications installation directory (for Releases 7.7, 7.9, or 7.11). Note: This is applicable only for users upgrading from Releases 7.7, 7.9, or 7.11.
<YFS_HOME>	For Releases 7.3, 7.5, and 7.5 SP1, this is the user-supplied location of the Sterling Supply Chain Applications installation directory. For Releases 7.7, 7.9, and 7.11, this is the user-supplied location of the <YANTRA_HOME>/Runtime directory. For Release 8.0 and later, the <YANTRA_HOME>/Runtime directory is no longer used and has been substituted with the location <INSTALL_DIR>.

Convention	Meaning
<YFS_HOME_OLD>	This is the <YANTRA_HOME>/Runtime directory for Releases 7.7, 7.9, or 7.11. Note: This is only applicable for users upgrading from Releases 7.7, 7.9, or 7.11.
<ANALYTICS_HOME>	User-supplied location of the Sterling Analytics installation directory. Note: This convention is used only in the <i>Selling and Fulfillment Foundation: Business Intelligence Guide</i> .
<COGNOS_HOME>	User-supplied location of the IBM Cognos 8 Business Intelligence installation directory. Note: This convention is used only in the <i>Selling and Fulfillment Foundation: Business Intelligence Guide</i> .
<MQ_JAVA_INSTALL_PATH>	User-supplied location of the IBM WebSphere® MQ Java components installation directory. Note: This convention is used only in the <i>Selling and Fulfillment Foundation: System Management and Administration Guide</i> .
<DB>	Refers to Oracle®, IBM DB2®, or Microsoft SQL Server® depending on the database server.
<DB_TYPE>	Depending on the database used, considers the value oracle, db2, or sqlserver.

Note: The Selling and Fulfillment Foundation documentation set uses the following conventions in the context of the product name:

- Yantra is used for Release 7.7 and earlier.
- Sterling Supply Chain Applications is used for Releases 7.9 and 7.11.
- Sterling Multi-Channel Fulfillment Solution is used for Releases 8.0 and 8.2.
- Selling and Fulfillment Foundation is used for Releases 8.5 and 9.0.

Introduction

The Parcel Carrier Adapters (Sterling FedEx Adaptor, Sterling ConnectShip Adaptor, and Sterling Pierbridge Adaptor) provides applications with an interface for their carrier-related functionality. It helps companies to quickly meet the changing requirements initiated by both carriers and customers, in the most efficient way.

The Parcel Carrier Adapters have a data-driven design, with functionality defined in terms of the relationship between entities stored as data elements in the database. Carriers having similar functionality can be incorporated into an installation with minimal engineering effort.

This chapter provides:

- [Technology Overview](#)
- [Functionality Overview](#)


1.1 Technology Overview

This section explains the architecture of the Parcel Carrier Adapters, and default printers that the Parcel Carrier Adapters support.

1.1.1 Parcel Carrier Adapters Architecture

[Figure 1–1](#) illustrates Parcel Carrier Adapters integration with FedEx, ConnectShip, and AgileElite server through TCIP/IP socket and HTTP.

Figure 1–1 Architecture of Parcel Carrier Adapters

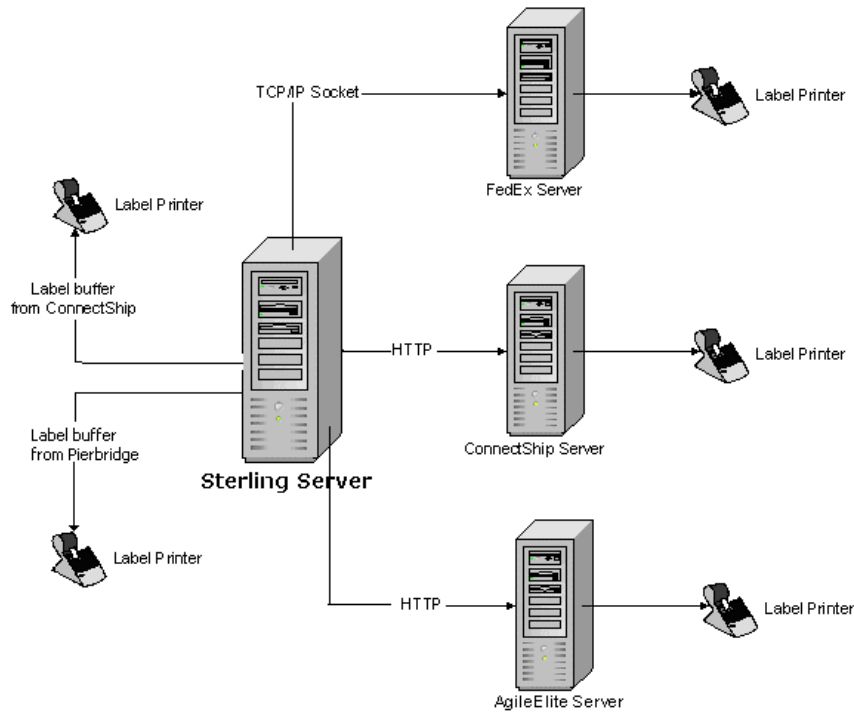

Note: For LTL/TL (Less-than Truck Load/Truck Load) shipments, integration with any of the Parcel Carrier Adapters is not supported.

FedEx

The Sterling FedEx Adaptor communicates with the FedEx PowerShip server (FSMS) through TCP/IP sockets. The FedEx Powership server and the Sterling FedEx Adaptor are part of the same LAN/WAN. Labels can be either printed directly from the FedEx server or saved in PNG format. The FedEx server can also return a label buffer, but the current WMS or Sterling FedEx Adaptor integration does not support printing this buffer.

ConnectShip

The Sterling ConnectShip Adaptor communicates with ConnectShip through HTTP. The ConnectShip server is installed on a machine that is part of the same LAN or WAN as that of the Sterling ConnectShip Adaptor. Labels can be printed directly from the ConnectShip server or saved in PNG format.

AgileElite Shipment Server

The Sterling Pierbridge Adaptor communicates with the AgileElite shipment server through HTTP. The AgileElite shipment server is installed on a machine that is a part of the same LAN or WAN as that of the Sterling Pierbridge Adaptor. Labels can be printed either directly from the AgileElite shipment server or saved in .png format on the AgileElite shipment server.

1.1.2 Printers

The Parcel Carrier Adapters support the following default printers:

Table 1–1 Printers Supported

Carrier	Printer
FedEx	– Eltron LP2844
ConnectShip	– ConnectShip supports most printers. For more details about the ConnectShip supported printers, see Chapter 4, "Integrating the Sterling Parcel Carrier Adapters with Carrier Servers" .
AgileElite shipment server	– AgileElite shipment server supports most printers, including Eltron, Zebra, and Generic Windows.

1.2 Functionality Overview

The Parcel Carrier Adapters support:

- [ConnectShip Compliance Functionality](#)
- [FedEx Compliance Functionality](#)
- [AgileElite Shipment Server Compliance Functionality](#)

1.2.1 ConnectShip Compliance Functionality

The Sterling ConnectShip Adaptor functionalities provided for ConnectShip compliance are:

- Open Manifest
- Ship Carton
- Delete Carton
- Close Manifest

ConnectShip is used for shipping UPS packages.

1.2.2 FedEx Compliance Functionality

The Sterling FedEx Adaptor functionalities provided for FedEx compliance are:

- Open Manifest
- Generation of Transaction 020 (Global Ship request/reply)
- Generation of Transaction 023 (Delete Carton Request/reply)
- Generation of Transaction 007 (End Of Day Request/Reply)
- Generation of Transaction 037 (Online Return Label)
- Generation of Transaction 095 (Label Reprint Transaction)

1.2.3 AgileElite Shipment Server Compliance Functionality

The following functionalities are included in the Sterling Pierbridge Adaptor for compliance with the AgileElite shipment server:

- Rate (Request/Reply) transaction
- Void (Request/Reply) transaction
- EndOfDayList (Request/Reply) transaction
- EndOfDayAction (Request/Reply) transaction
- Print (Request/Reply) transaction
- Ship (Request/Reply) transaction
- Return (Request/Reply) transaction

Parcel Carrier Adapters Technical Details

The Sterling Warehouse Management System provides the ability to integrate parcel carriers as a part of the manifesting process within a node.

The Sterling WMS integrates with carriers when:

- Opening a manifest for a carrier
- Adding containers to an open manifest
- Removing containers from an open manifest
- Closing a manifest

The carrier integration is built over an abstraction layer called the Parcel Carrier Adapters. This layer abstracts the integration details to various carriers from the applications. The Parcel Carrier Adapters expose internal APIs corresponding to the Sterling WMS carrier integration as listed (above) to the application layer. For example, in the Sterling WMS, the Parcel Carrier Adapters take a standardized XML, use configuration data specific to carriers to massage the data and pass data to the carriers using specific protocols.

The Parcel Carrier Adapters are preconfigured to integrate directly with FedEx, ConnectShip, and AgileElite shipment server.

This chapter provides technical details of the Parcel Carrier Adapters. It contains descriptions and usage information for the Parcel Carrier Adapters tables, User Exits, and XML.

This chapter includes:


- [Introduction to the Parcel Carrier Adapters Tables](#)
- [Parcel Carrier Adapters Integration Details](#)

- [Field-Level Mapping for ConnectShip](#)
- [Field-Level Mapping for FedEx](#)
- [Field-Level Mapping for Sterling Pierbridge Adaptor](#)
- [Using User Exits](#)

2.1 Introduction to the Parcel Carrier Adapters Tables

The Parcel Carrier Adapters are designed with a data driven approach. The business logic is defined in terms of relationships between entities stored as data elements in the database. [Figure 2–1](#) illustrates the Parcel Carrier Adapters tables.

Figure 2–1 The Parcel Carrier Adapters Tables

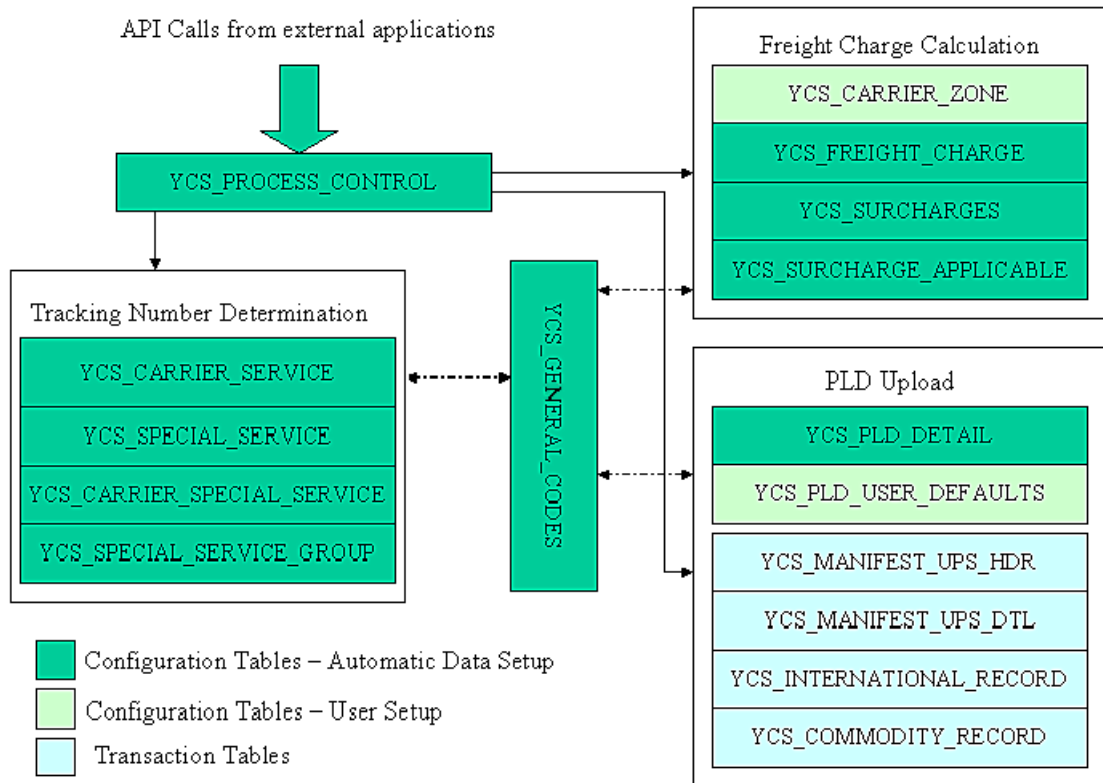

2.1.1 Configuration Tables

The Parcel Carrier Adapters use the following configuration tables:

- YCS_CARRIER_SERVICE
- YCS_SPECIAL_SERVICE
- YCS_CARRIER_SPECIAL_SERVICE
- YCS_SPECIAL_SERVICE_GROUP
- YCS_GENERAL_CODES
- YCS_PROCESS_CONTROL

- YCS_PLD_DETAIL
- YCS_PLD_USER_DEFAULTS

The Parcel Carrier Adapters Process Control table defines the mechanism or protocol for integrating the Sterling WMS to a carrier for a specific API.

Table 2–1 Process Control

Attribute	Description
CARRIER	Carrier Code same as in the Sterling WMS
API_NAME	Name of the Parcel Carrier Adapters API corresponding to each Console (OPENMANIFEST, SHIPCARTON,DELETECARTON,CLOSEMANIFEST)
LOGIC_SWITCH	Logic Switch associated with the API (This identifies the mechanism or protocol for integration to the carrier for the specific Console or API)

Note: The Process Control attributes of the Parcel Carrier Adapters listed in [Table 2–1](#) applies only to the Sterling FedEx Adaptor, and the Sterling ConnectShip Adaptor.

Table 2–2 Logic switches for Carrier Integration

Sterling WMS API	Parcel Carrier Adapters API	FedEx	ConnectShip
openManifest	OPENMANIFEST	None	None
addContainerToManifest	SHIPCARTON	020	CS_SHIP
removeContainerFromManifest	DELETECARTON	023	CS_VOID
closeManifest	CLOSEMANIFEST	007	CS_CLOSE_MANIFEST

Note: The Logic Switches listed in [Table 2–2](#) applies only to the Sterling FedEx Adaptor, and the Sterling ConnectShip Adaptor.

Table 2–3 General Codes

Attribute	Description
CARRIER	Carrier Code the same as in the Sterling WMS
CODE	A Data value passed to the Parcel Carrier Adapters, that needs to be translated to the carrier specific value
VALUE	Carrier specific value to which the Parcel Carrier Adapters data value is translated to.
DESCRIPTION	Value of Field_Name in YCS_PLD_DETAIL table
CARRIER_ADAPTER_IM PL_KEY	The identifier of the Sterling Parcel Carrier Adapter that is being used.

The YCS_PLD_DETAIL table provides mapping between the Parcel Carrier Adapters XML attributes and the external Carrier Adapter attributes for the processes of add or remove package, and open or close manifest.

Table 2–4 PLD Detail

Attribute	Description
CARRIER	The identifier of the Sterling Parcel Carrier Adapter that is being used.
FIELD_NAME	Parcel Carrier Adapters API Attribute Name (It is either the complete XPATH to the Parcel Carrier Adapters input XML, for example ConnectShip or only the leafattribute value, for example, FEDX.)
FIELD_LOCATION	Numeric Value Based on the Attribute Name that identifies the Fedex Attribute ID. (For example, 498 -> ShipperAccountNumber)
FIELD_TYPE	Number/String

Table 2–4 PLD Detail

Attribute	Description
FIELD_LENGTH	Length of Attribute
DECIMAL_DIGITS	Decimal digits only if FIELD_TYPE is Real
REQUIRED_FLAG	R - Required field for the carrier
DEFAULT_TYPE	<p>SYSTEM: Use the value specified in DEFAULT_VALUE column.</p> <p>MAPPING: Use the specified value passed in the Parcel Carrier Adapters input and get the value from YCS_GENERAL_CODES table.</p> <p>Blanks: No Defaulting. Use the value from the Parcel Carrier Adapters input XML.</p>
DEFAULT_VALUE	Specific Value depending on DEFAULT_TYPE
CARRIER_FIELD_NAME	<p>Used inConnectShip to specify the complete XML path. ConnectShip do not use element attributes. They only use Nodes with child nodes or Node values, as:</p> <pre><eCommerce> <Shipment> <ShipmentDetail> <ShipDate>20051229</ShipDate> <Weight>12</Weight> </ShipmentDetail> </Receiver> <Address> <City>Boston</City> </Address> </Receiver> </Shipment> </eCommerce></pre> <p>For example, SHIPMENTREQUEST/DEFATTRIBUTES/SHIPDATE</p>

Table 2–4 PLD Detail

Attribute	Description
TXN	Transaction or Process. Primarily Logic switches corresponding to Add/Remove package, Open/Close Manifest.
SUB_TXN	Send or Receive Input or Output Data (Request/Reply)

2.2 Parcel Carrier Adapters Integration Details

Generally, carriers are integrated with the Parcel Carrier Adapters when manifesting. The Sterling Warehouse Management System has the following Parcel Carrier Adapters:

- Sterling FedEx Adaptor
- Sterling ConnectShip Adaptor
- Sterling Pierbridge Adaptor

During manifest, the Sterling WMS integrates with a carrier as follows:

1. Selling and Fulfillment Foundation checks if carrier integration is required or not based on the configuration present in YFS_SCAC and YFS_SCAC_EX tables. If carrier integration is required, the Sterling WMS invokes the relevant Sterling Parcel Carrier Adapter.
2. The input and output XMLs passed between the carrier's server and the Parcel Carrier Adapters may change based on the API being invoked by Sterling WMS. The Parcel Carrier Adapters create input data needed for these XMLs based on the mapping details provided in [Table 2–4](#), and sends it to the carrier's server.

Note: Note that the `openManifest` API does not support any carrier integration.

2.3 Field-Level Mapping for Carriers

This section depicts the conversion of the Sterling WMS input XML to the Parcel Carrier Adapters input XML. It also explains the mapping that is done between the input XML that is passed to the Parcel Carrier Adapters, and the input required for individual carrier servers.

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UPSPLD/PackageLevelDetail@UOMWeight	Shipment.Carrier.Locale.WeightUOM
UPSPLD/PackageLevelDetail@PackageActualWeight	Container.Container_Gross_Weight
UPSPLD/PackageLevelDetail@UOMDim	Shipment.Carrier.Locale.DimensionUOM
UPSPLD/PackageLevelDetail@PackageLength	Container.PackageLength
UPSPLD/PackageLevelDetail@ShipmentNumber	Shipment.ShipmentNo
UPSPLD/PackageLevelDetail@PackageTrackingNumber	Container.Tracking_No
UPSPLD/PackageLevelDetail@SatDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SATDELI" exist, then the value is set to "1"
UPSPLD/PackageLevelDetail@CurrencyCode	Shipment.Currency
UPSPLD/PackageLevelDetail@DeclaredValueInsurance	Container.Declared_Value
UPSPLD/PackageLevelDetail@ShipmentCODCurrencyCode	Shipment.Currency
UPSPLD/PackageLevelDetail@CODAmount	Container.COD_Amount
UPSPLD/PackageLevelDetail@CODFundsInd	Shipment.COD_Pay_Method
UPSPLD/AccessororialRecord@HazMat	Shipment.HazardousMaterialFlag

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UPSPLD/CommodityRecord@PartNumber	Container.ContainerDetail.Item.Item_Id
UPSPLD/CommodityRecord@LineQuantity	Container.ContainerDetail.Quantity
UPSPLD/CommodityRecord@LineQtyUOM	Container.ContainerDetail.UOM
UPSPLD/CommodityRecord@CommodityWeight	Container.ContainerDetail.OrderLine.Item_Weight * Container.ContainerDetail.Quantity
UPSPLD/CommodityRecord@LineUnitAmtPrice	Container.ContainerDetail.OrderLine.Unit_Price * Container.ContainerDetail.Quantity
UPSPLD/CommodityRecord@LineMerchDesc1	Container.ContainerDetail.Item.Description
UPSPLD/CommodityRecord@LineOriginCountry	Container.ContainerDetail.Item.Country_Of_Origin
UPSPLD/CommodityRecord@CommodityCode	Container.ContainerDetail.Item.Harmonized_Code
UPSPLD/CommodityRecord@LineLicenseInfo	Container.Export_License_No
UPSPLD/CommodityRecord@LineLicenseExpDate	Container.Export_License_Exp_Date
UPSPLD/CommodityRecord@ECCN	Container.ContainerDetail.Item.ECCN
UPSPLD/InternationalRecord@ShipmentInsuranceDeclaredValue	Container.Declared_Value
UPSPLD/InternationalRecord@UltimateDestCountry	Shipment.ShipToPersonInfo.Country
UPSPLD/InternationalRecord@DescriptionOfGoods	Container.ContainerDetail.Item.NMFC_Code or Container.ContainerDetail.Item.NMFC_Class

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UPSPLD/ExtraFieldsRecord@SunDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SUNDELI" exist, then the value is set to "1"
UPSPLD/PackageLevelDetail@ConsigneeCompanyName	Shipment.ShipToPersonInfo.Company
UPSPLD/PackageLevelDetail@ConsigneeAttention	Shipment.ShipToPersonInfo.Name
UPSPLD/PackageLevelDetail@ConsigneeAddress1	Shipment.ShipToPersonInfo.Address_Line1
UPSPLD/PackageLevelDetail@ConsigneeAddress2	Shipment.ShipToPersonInfo.Address_Line2
UPSPLD/PackageLevelDetail@ConsigneeAddress3	Shipment.ShipToPersonInfo.Address_Line3
UPSPLD/PackageLevelDetail@ConsigneeCity	Shipment.ShipToPersonInfo.City
UPSPLD/PackageLevelDetail@ConsigneeStateProv	Shipment.ShipToPersonInfo.State
UPSPLD/PackageLevelDetail@ConsigneePostalCode	Shipment.ShipToPersonInfo.Zip_Code
UPSPLD/PackageLevelDetail@ResInd	If Shipment.ShipToPersonInfo.Company is "Blank", then value "1" is passed. Otherwise, value "0" is passed.
UPSPLD/PackageLevelDetail@ConsigneePhone	Shipment.ShipToPersonInfo.Day_Phone
UPSPLD/PackageLevelDetail@ConsigneeCountry	Shipment.ShipToPersonInfo.Country

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UPSPLD/PackageLevelDetail@ConsigneeUPSAcctNumber	Shipment.CustCarrier_Account_No
UPSPLD/PackageLevelDetail@ShipperAccountNumber	Container.Manifest.Manifest.Shipper_Account_No
UPSPLD/PackageLevelDetail@ShipmentChgType	Shipment.FreightTerms.ChargesPaidBy. If this value is "BUYER", then the Parcel Carrier Adapters attribute is set to "COL". Otherwise, it is set to "PRE"
UPSPLD/PackageLevelDetail@PickupDate	Container.Manifest.Manifest_Date
UPSPLD/ExtraFieldsRecord@ThermalLabelPrinterID	PrinterId for Carrier Label Document Id (FEDX_CARRIER_LABEL or UPSN_CARRIER_LABEL)
UPSPLD/PackageLevelDetail@UPSServiceType	Shipment.SCAC.SCACAndService.Electronic_Code
UPSPLD/AdvisoryInformationRecord@SNEmailAddressDestination1	Shipment.ShipTo.PersonInfo.EmailId
UPSPLD/AdvisoryInformationRecord@SNCompanyName1	Shipment.ShipToPersonInfo.Company
UPSPLD/AdvisoryInformationRecord@SNAttnName1	Shipment.ShipToPersonInfo.Name
UPSPLD/AdvisoryInformationRecord@SNContactPhone1	Shipment.ShipToPersonInfo.Day_Phone
UPSPLD/PackageLevelDetail@DCISType	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "DELCONF" exist, then the value is set to "1"
UPSPLD/PackageLevelDetail@DCISType	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "DELCONF" exist, then the value is set to "2"

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UPSPLD/PackageLevelDetail@DCISType	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "DELCONF" exist, then the value is set to "A"
UPSPLD/AlternatePartyRecord@CompanyName	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Company
UPSPLD/AlternatePartyRecord@Address1	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Address_Line1
UPSPLD/AlternatePartyRecord@Address2	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Address_Line2
UPSPLD/AlternatePartyRecord@Address3	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Address_Line3
UPSPLD/AlternatePartyRecord@City	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.City
UPSPLD/AlternatePartyRecord@StateProv	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.State
UPSPLD/AlternatePartyRecord@PostalCode	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Zip_Code
UPSPLD/AlternatePartyRecord@Country	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Country
UPSPLD/AlternatePartyRecord@Phone	Shipment.ShipNode.SCACEX.THIRDPARTYORGANIZATION.Phone
UPSPLD/AlternatePartyRecord@ID_AcctNumber	Shipment.ShipNode.SCACEX.Account1
UPSPLD/PackageLevelDetail@NOFNSequence	Sequence of Container within the shipment
UPSPLD/PackageLevelDetail@NOFNTotal	Total no of containers in shipment
ShipperCompanyName	Shipment.ShipFrom.Country
ShipperAddress1	Shipment.ShipFrom.Address1

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
ShipperAddress2	Shipment.ShipFrom.Address2
ShipperCity	Shipment.ShipFrom.ShipperCity
ShipperState	Shipment.ShipFrom.ShipperState
ShipperPostalCode	Shipment.ShipFrom.ShipperPostalCode
ConsigneeCompanyName	Shipment.ShipToPersonInfo.Company
ConsigneeAddress1	Shipment.ShipToPersonInfo.Address_Line1
ConsigneeAddress2	Shipment.ShipToPersonInfo.Address_Line2
ConsigneeCity	Shipment.ShipToPersonInfo.City
ConsigneeStateProv	Shipment.ShipToPersonInfo.State
ConsigneePostalCode	Shipment.ShipToPersonInfo.Zip_Code
ConsigneePhone	Shipment.ShipToPersonInfo.Day_Phone
ConsigneeUPSAccountNumber	Shipment.CustCarrier_Account_No
PackageActualWeight	Container.Container_Gross_Weight
ShipmentChgType	Shipment.FreightTerms.ChargesPaidBy. If this value is "BUYER", then the Parcel Carrier Adapters attribute is set to "COL". Otherwise, it is set to "PRE"
PickupDate	Container.Manifest.Manifest_Date
DeclaredValueInsurance	Container.Declared_Value
CODInd	NA
ShipperContactName	Shipment.ShipFrom.ShipperContactName
ConsigneeCountry	Shipment.ShipToPersonInfo.Country
CODAmount	Container.COD_Amount
PackageHeight	Container.PackageHeight
PackageWidth	Container.PackageWidth

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
PackageLength	Container.PackageLength
UltimateDestCountry	Shipment.ShipToPersonInfo.Country
DescriptionOfGoods	Container.ContainerDetail.Item.NMFC_Code or Container.ContainerDetail.Item.NMFC_Class
LineOriginCountry	Container.ContainerDetail.Item.Country_Of_Origin
LineQuantity	Container.ContainerDetail.Quantity
ShipperCountry	Shipment.ShipNodePersonInfo.Country
InvoiceLineTotals	Sum of ContainerDetail.Quantity* Unit_Price from OrderLine
ShipperPhoneNumber	Shipment.ShipFrom.ShipperPhoneNumber
ResInd	If Shipment.ShipToPersonInfo.Company is set to "Blank", then the value is set to "1". Otherwise, it is set to "0"
ShipperAccountNumber	Container.Manifest.Manifest.Shipper_Account_No
ThermalLabelPrinterID	PrinterId for Carrier Label Document Id (FEDX_CARRIER_LABEL or UPSN_CARRIER_LABEL)
ShipperEIN	Container.Manifest.Ship_Node.Export_Taxpayer_Id
SNEmailAddressDestination1	Shipment.ShipTo.PersonInfo.EmailId
SunDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SUNDELI" exist, then the value is set to "1"
SatDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SATDELI" exist, then the value is set to "1"
UPSServiceType	Shipment.SCAC.SCACAndService.Electronic_Code
ShipperCompanyName	Shipment.ShipFrom.Country
ShipperAddress1	Shipment.ShipFrom.Address1
ShipperAddress2	Shipment.ShipFrom.Address2

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
ShipperCity	Shipment.ShipFrom.ShipperCity
ShipperState	Shipment.ShipFrom.ShipperState
ShipperPostalCode	Shipment.ShipFrom.ShipperPostalCode
ConsigneeCompanyName	Shipment.ShipToPersonInfo.Company
ConsigneeAddress1	Shipment.ShipToPersonInfo.Address_Line1
ConsigneeAddress2	Shipment.ShipToPersonInfo.Address_Line2
ConsigneeCity	Shipment.ShipToPersonInfo.City
ConsigneeStateProv	Shipment.ShipToPersonInfo.State
ConsigneePostalCode	Shipment.ShipToPersonInfo.Zip_Code
ConsigneePhone	Shipment.ShipToPersonInfo.Day_Phone
ConsigneeUPSAccountNumber	Shipment.CustCarrier_Account_No
PackageActualWeight	Container.Container_Gross_Weight
ShipmentChgType	Shipment.FreightTerms.ChargesPaidBy. If this value is "BUYER", then the Parcel Carrier Adapters attribute is set to "COL". Otherwise, it is set to "PRE"
PickupDate	Container.Manifest.Manifest_Date
DeclaredValueInsurance	Container.Declared_Value
CODInd	
ShipperContactName	Shipment.ShipFrom.ShipperContactName
ConsigneeCountry	Shipment.ShipToPersonInfo.Country
CODAmount	Container.COD_Amount
PackageHeight	Container.PackageHeight
PackageWidth	Container.PackageWidth
PackageLength	Container.PackageLength

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
UltimateDestCountry	Shipment.ShipToPersonInfo.Country
DescriptionOfGoods	Container.ContainerDetail.Item.NMFC_Code or Container.ContainerDetail.Item.NMFC_Class
LineOriginCountry	Container.ContainerDetail.Item.Country_Of_Origin
LineQuantity	Container.ContainerDetail.Quantity
ShipperCountry	Shipment.ShipNodePersonInfo.Country
InvoiceLineTotals	Sum of ContainerDetail.Quantity* Unit_Price from OrderLine
ShipperPhoneNumber	Shipment.ShipFrom.ShipperPhoneNumber
ResInd	If Shipment.ShipToPersonInfo.Company is set to "Blank", then the value is set to "1". Otherwise, it is set to "0"
ShipperAccountNumber	Container.Manifest.Manifest.Shipper_Account_No
ThermalLabelPrinterID	PrinterId for Carrier Label Document Id (FEDX_CARRIER_LABEL or UPSN_CARRIER_LABEL)
ShipperEIN	Container.Manifest.Ship_Node.Export_Taxpayer_Id
SNEmailAddressDestination1	Shipment.ShipTo.PersonInfo.EmailId
SunDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SUNDELI" exist, then the value is set to "1"
SatDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SATDELI" exist, then the value is set to "1"
UPSServiceType	Shipment.SCAC.SCACAndService.Electronic_Code

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
Configuration for ShipperAccountNumber. 1:1 mapping between ShipperAccountNumber and Shipping Key. One installation can have multiple meter numbers. Each meter number has a corresponding Shipping Key.	Container.Manifest.Manifest.Shipper_Account_No
ShipperAccountNumber	Container.Manifest.Manifest.Shipper_Account_No
PickUpDate	Container.Manifest.Manifest_Date
UPSServiceType	Shipment.SCAC.SCACAndService.Electronic_Code
PackageActualWeight	Container.Container_Gross_Weight
DescriptionOfGoods	Container.ContainerDetail.Item.NMFC_Code or Container.ContainerDetail.Item.NMFC_Class
PackageLength	Container.PackageLength
PackageWidth	Container.PackageWidth
PackageHeight	Container.PackageHeight
Declared Value Insurance	Container.Declared_Value
SatDeliveryInd	Shipment.SpecialServiceRef.SpecialServiceCode. If a special service with value "SATDELI" exist, then the value is set to "1"
ShipmentChgType	Shipment.FreightTerms.ChargesPaidBy. If this value is "BUYER", then the Parcel Carrier Adapters attribute is set to "COL". Otherwise, it is set to "PRE"
ConsigneeUPSAccountNumber	Shipment.CustCarrier_Account_No
CODAmount	Container.COD_Amount

Table 2–5 Field-level Mapping for Sterling WMS XMLs published to corresponding Sterling Parcel Carrier Adapter

Sterling Parcel Carrier Adapter Attribute	Database Attribute
SenderPhone	Shipment.ShipNodePersonInfo.Day_Phone
ConsigneeCompanyName	Shipment.ShipToPersonInfo.Company
ConsigneeAddress1	Shipment.ShipToPersonInfo.Address_Line1
ConsigneeAddress2	Shipment.ShipToPersonInfo.Address_Line2
ConsigneeCity	Shipment.ShipToPersonInfo.City
ConsigneeStateProv	Shipment.ShipToPersonInfo.State
ConsigneeCountry	Shipment.ShipToPersonInfo.Country
ConsigneePostalCode	Shipment.ShipToPersonInfo.Zip_Code
ConsigneeCompanyName	Shipment.ShipToPersonInfo.Company
ConsigneePhone	Shipment.ShipToPersonInfo.Day_Phone

This section describes the following:

- [Field-Level Mapping for ConnectShip](#)
- [Field-Level Mapping for FedEx](#)
- [Field-Level Mapping for Sterling Pierbridge Adaptor](#)
- [Using User Exits](#)

2.3.1 Field-Level Mapping for ConnectShip

The field-level mapping for the Sterling ConnectShip Adaptor XML and the ConnectShip SHIPMENTREQUEST API input and output are provided in [Table 2–5](#). Mapping is done between the Input XML that is passed to the Sterling ConnectShip Adaptor and the input required for ConnectShip. The TransactionId is “CS_SHIP” and the SubTransaction Id is “Request”. PId Mapping provided here is only for the Carrier (United Parcel Service Unites States).

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/PKGWEIGHT/WEIGHTUNITS	UPSPLD/PackageLevelDetail@UOMWeight
SHIPMENTREQUEST/PACKAGES/PKG/PKGWEIGHT/WEIGHTVALUE	UPSPLD/PackageLevelDetail@PackageActualWeight
SHIPMENTREQUEST/PACKAGES/PKG/DIMENSION/DIMUNITS	UPSPLD/PackageLevelDetail@UOMDim
SHIPMENTREQUEST/PACKAGES/PKG/DIMENSION/DIMVALUE	UPSPLD/PackageLevelDetail@PackageLength
SHIPMENTREQUEST/PACKAGES/PKG/REFERENCE/MISREFERENCE1	UPSPLD/PackageLevelDetail@ShipmentNumber
SHIPMENTREQUEST/PACKAGES/PKG/TRACKINGNUMBER	UPSPLD/PackageLevelDetail@PackageTrackingNumber
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESESERVICEOPTIONS/SATDELIVERY	UPSPLD/PackageLevelDetail@SatDeliveryInd
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESESERVICEOPTIONS/DECLAREDVALUE/CURRENCYCODE	UPSPLD/PackageLevelDetail@CurrencyCode
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESESERVICEOPTIONS/DECLAREDVALUE/MONETARYVALUE	UPSPLD/PackageLevelDetail@DeclaredValueInsurance
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESESERVICEOPTIONS/COD/CODAMOUNT/CURRENCYCODE	UPSPLD/PackageLevelDetail@ShipmentCODCurrencyCode

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/COD/CODAMOUNT/MONETARYVALUE	UPSPLD/PackageLevelDetail@CODAmount
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/COD/CODPAYMENTMETHOD	UPSPLD/PackageLevelDetail@CODFundsInd
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/HAZARDOUS/HAZMAT	UPSPLD/AccessorialRecord@HazMat
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/IN TL/COMMODITYCONTENTS/CONTENT/PRODUCTCODE	UPSPLD/CommodityRecord@PartNumber
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/IN TL/COMMODITYCONTENTS/CONTENT/QUANTITY	UPSPLD/CommodityRecord@LineQuantity
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/IN TL/COMMODITYCONTENTS/CONTENT/UNITMEASURE	UPSPLD/CommodityRecord@LineQtyUOM
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/IN TL/COMMODITYCONTENTS/CONTENT/UNITWEIGHT	UPSPLD/CommodityRecord@CommodityWeight

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/UNITVALUE	UPSPLD/CommodityRecord@LineUnitAmtPrice
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/PRODUCTDESCRIPTION	UPSPLD/CommodityRecord@LineMerchDesc1
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/ORIGINCOUNTRY	UPSPLD/CommodityRecord@LineOriginCountry
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/HARMONIZEDCODE	UPSPLD/CommodityRecord@CommodityCode
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/LICENSENUMBER	UPSPLD/CommodityRecord@LineLicenseInfo
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/LICENSEEXPIREDATE	UPSPLD/CommodityRecord@LineLicenseExpDate
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTEGRAL/COMMODITYCONTENTS/CONTENT/ECCN	UPSPLD/CommodityRecord@ECCN

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTL/DECLAREDVALUECUSTOMS	UPSPLD/InternationalRecord@ShipmentInsuranceDeclaredValue
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTL/ULTIMATEDESTCOUNTRY	UPSPLD/InternationalRecord@UltimateDestCountry
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTL/INTLDESCRIPTION	UPSPLD/InternationalRecord@DescriptionOfGoods
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/SUNDAY_DELIVERY	UPSPLD/ExtraFieldsRecord@SunDeliveryInd
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/COMPANY	UPSPLD/PackageLevelDetail@ConsigneeCompanyName
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/CONTACT	UPSPLD/PackageLevelDetail@ConsigneeAttention
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/ADDRESS1	UPSPLD/PackageLevelDetail@ConsigneeAddress1
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/ADDRESS2	UPSPLD/PackageLevelDetail@ConsigneeAddress2
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/ADDRESS3	UPSPLD/PackageLevelDetail@ConsigneeAddress3
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/CITY	UPSPLD/PackageLevelDetail@ConsigneeCity

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/STATEPROVINCE	UPSPLD/PackageLevelDetail@ConsigneeStateProv
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/POSTALCODE	UPSPLD/PackageLevelDetail@ConsigneePostalCode
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/RESIDENTIAL	UPSPLD/PackageLevelDetail@ResInd
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/PHONE	UPSPLD/PackageLevelDetail@ConsigneePhone
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/COUNTRYSYMBOL	UPSPLD/PackageLevelDetail@ConsigneeCountry
SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/CONSIGNEEACCOUNT	UPSPLD/PackageLevelDetail@ConsigneeUPSAccountNumber
SHIPMENTREQUEST/DEFATTRIBUTES/SHIPPERINFO/SHIPPER	UPSPLD/PackageLevelDetail@ShipperAccountNumber
SHIPMENTREQUEST/PACKAGES/PKG/TERMS	UPSPLD/PackageLevelDetail@ShipmentChgType
SHIPMENTREQUEST/DEFATTRIBUTES/SHIPDATE	UPSPLD/PackageLevelDetail@PickupDate
SHIPMENTREQUEST/PACKAGES/PKG/LABELPRINT/PORT	UPSPLD/ExtraFieldsRecord@ThermalLabelPrinterID
SHIPMENTREQUEST/SHIPMENTSERVICE/SCS	UPSPLD/PackageLevelDetail@UPSServiceType
SHIPMENTREQUEST/PACKAGES/PKG/SHIPNOTIFICATION/CARRIERSHIPNOTIFICATION/CSNUMBER_OR_EMAIL	UPSPLD/AdvisoryInformationRecord@SNEmailAddressDestination1

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/SHIPNOTIFICATION/CARRIERSHIPNOTIFICATION/CSNADDRESS/CSNCOMPANY	UPSPLD/AdvisoryInformationRecord@SNCompanyName1
SHIPMENTREQUEST/PACKAGES/PKG/SHIPNOTIFICATION/CARRIERSHIPNOTIFICATION/CSNADDRESS/CSNCONTACT	UPSPLD/AdvisoryInformationRecord@SNAttnName1
SHIPMENTREQUEST/PACKAGES/PKG/SHIPNOTIFICATION/CARRIERSHIPNOTIFICATION/CSNADDRESS/CSNPHONE	UPSPLD/AdvisoryInformationRecord@SNContactPhone1
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/PROOF/PROOFFLAG	UPSPLD/PackageLevelDetail@DCIStype
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/PROOF/PROOFSIGNATURE	UPSPLD/PackageLevelDetail@DCIStype
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/PROOF/PROOFADULTSIGNATURE	UPSPLD/PackageLevelDetail@DCIStype
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPCOMPANY	UPSPLD/AlternatePartyRecord@CompanyName
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPADDRESS1	UPSPLD/AlternatePartyRecord@Address1

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPADDRESS2	UPSPLD/AlternatePartyRecord@Address2
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPADDRESS3	UPSPLD/AlternatePartyRecord@Address3
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPCITY	UPSPLD/AlternatePartyRecord@City
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPSTATEPROVINCE	UPSPLD/AlternatePartyRecord@StateProv
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPPOSTALCODE	UPSPLD/AlternatePartyRecord@PostalCode
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPCOUNTRYSYMBOL	UPSPLD/AlternatePartyRecord@Country
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPPHONE	UPSPLD/AlternatePartyRecord@Phone
SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/BILLTHIRDPARTY/BTPACCOUNT	UPSPLD/AlternatePartyRecord@ID_AcctNumber

Table 2–6 Field-Level Mapping for ConnectShip

Carrier Field Name	Sterling ConnectShip Adaptor Attribute
SHIPMENTREQUEST/PACKAGES/PKG/REFERENCE/NOFN_SEQUENCE	UPSPLD/PackageLevelDetail@NOFNSequence
SHIPMENTREQUEST/PACKAGES/PKG/REFERENCE/NOFN_TOTAL	UPSPLD/PackageLevelDetail@NOFNTotal

2.3.2 Field-Level Mapping for FedEx

For FedEx integration, the following internal methods of the Sterling FedEx Adaptor are invoked:

- openManifest
- shipCarton
- deleteCarton
- closeManifest

The field-level mappings for FedEx are provided in [Table 2–7](#).

Table 2–7 Field-Level Mapping for FedEx

ID	Name	Sterling FedEx Adaptor Attribute
4	Shipper Company Name	ShipperCompanyName
5	Shipper Address 1	ShipperAddress1
6	Shipper Address 2	ShipperAddress2
7	Shipper City	ShipperCity
8	Shipper State	ShipperState
9	Shipper Postal Code	ShipperPostalCode
11	Recipient Company	ConsigneeCompanyName
13	Recipient Address 1	ConsigneeAddress1
14	Recipient Address 2	ConsigneeAddress2
15	Recipient City	ConsigneeCity
16	Recipient State/Province	ConsigneeStateProv

Table 2-7 Field-Level Mapping for FedEx

ID	Name	Sterling FedEx Adaptor Attribute
17	Recipient Postal Code	ConsigneePostalCode
18	Recipient Phone Number	ConsigneePhone
20	Payer or Account Number	ConsigneeUPSActNumber
21-#	Package/Shipment Weight	PackageActualWeight
23	Payment Code	ShipmentChgType
24	Ship Date	PickupDate
26	Declared / Carriage Value	DeclaredValueInsurance
27	COD Flag	CODInd
32	Shipper Contact Name	ShipperContactName
50	Recipient Country Code	ConsigneeCountry
53	COD Amount	CODAmount
57-#	Package height	PackageHeight
58-#	Package width	PackageWidth
59-#	Package length	PackageLength
74	Country of Ultimate Destination	UltimateDestCountry
79-#	Description	DescriptionOfGoods
80-#	Country of Manufacture	LineOriginCountry
82-#	Quantity	LineQuantity
117	Shipper Country	ShipperCountry
119	Total Customs Value	InvoiceLineTotals
183	Shipper Phone Number	ShipperPhoneNumber
440	Residential Delivery Flag	ResInd
498	Meter Number	ShipperAccountNumber
537	Thermal Label Printer ID	ThermalLabelPrinterID
1139	Sender IRS/EIN Number	ShipperEIN
1204-#	Ship Alert Email Address	SNEmailAddressDestination1

Table 2–7 Field-Level Mapping for FedEx

ID	Name	Sterling FedEx Adaptor Attribute
1248	Sunday Delivery Flag	SunDeliveryInd
1266	Saturday Delivery Flag	SatDeliveryInd
1274	Service Type	UPSServiceType

2.3.3 Field-Level Mapping for Sterling Pierbridge Adaptor

The field-level mapping for Sterling Pierbridge Adaptor API inputs and outputs are provided in the factory setup of Selling and Fulfillment Foundation. Mapping is performed between the input XML that is passed to the Sterling Pierbridge Adaptor and the input required for the AgileElite shipment server. The PLD mappings for the Sterling Pierbridge Adaptor provided in [Table 2–8](#) are applicable for the following carriers:

- United States Postal Service
- Federal Express
- United Parcel Service United States
- United Parcel Service Canada
- United Parcel Service Asia Pacific
- United Parcel Service Europe
- United Parcel Service Latin America
- Purolator

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeVoidRequest/Carrier	DelPackage/Carrier
PierbridgeVoidRequest/Packages/Package/WayBillNumber	DelPackage/TrackingNumber
PierbridgeVoidRequest/UserName	DelPackage/ShipperAccountNumber

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeEndOfDayActionRequest@Carrier	Manifest@Carrier
PierbridgeEndOfDayActionRequest@ShipDate	Manifest@ManifestDate
PierbridgeEndOfDayActionRequest@UserName	Manifest@ShipperAccountNumber
PierbridgeEndOfDayListRequest@Carrier	Manifest@Carrier
PierbridgeEndOfDayListRequest@UserName	Manifest@ShipperAccountNumber
PierbridgePrintRequest@WayBillNumber	ReprintPackage@TrackingNumber
PierbridgePrintRequest@UserName	ReprintPackage@ShipperAccountNumber
PierbridgePrintRequest@Carrier	ReprintPackage@Carrier
PierbridgePrintRequest@UPSSServiceType	ReprintPackage@ServiceType
PierbridgeRateRequest@Carrier	FreightCharge@Carrier
PierbridgeRateRequest@Carrier	FreightCharge/Shipment@Carrier
PierbridgeRateRequest/Sender/City	FreightCharge/Shipment@FromCity
PierbridgeRateRequest/Sender/Region	FreightCharge/Shipment@FromState
PierbridgeRateRequest/Sender/PostalCode	FreightCharge/Shipment@FromZip
PierbridgeRateRequest@ServiceType	FreightCharge/Shipment@Service
PierbridgeRateRequest/Receiver/City	FreightCharge/Shipment@ToCity
PierbridgeRateRequest/Receiver/Country	FreightCharge/Shipment@ToCountry

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeRateRequest/Receiver/Region	FreightCharge/Shipment@ToState
PierbridgeRateRequest/Receiver/PostalCode	FreightCharge/Shipment@ToZip
PierbridgeRateRequest/Packages/Package/DeliveryConfirmation	FreightCharge/SpecialServices@SpecialService
PierbridgeRateRequest/Packages/Package/DimensionsUOM	FreightCharge/Package@DimensionUOM
PierbridgeRateRequest/Packages/Package/Height	FreightCharge/Package@Height
PierbridgeRateRequest/Packages/Package/Length	FreightCharge/Package@Length
PierbridgeRateRequest/Packages/Package/Weight	FreightCharge/Package@Weight
PierbridgeRateRequest/Packages/Package/WeightUOM	FreightCharge/Package@WeightUOM
PierbridgeRateRequest/Packages/Package/Width	FreightCharge/Package@Width
PierbridgeReturnRequest@Carrier	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@Carrier
PierbridgeReturnRequest@ServiceType	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@UPSServiceType
PierbridgeReturnRequest/Sender@CompanyName	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperCompanyName
PierbridgeReturnRequest/Sender@Street	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperAddress1
PierbridgeReturnRequest/Sender@Locale	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperAddress2
PierbridgeReturnRequest/Sender@Other	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperAddress3
PierbridgeReturnRequest/Sender@City	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperCity

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeReturnRequest/Sender@Region	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperState
PierbridgeReturnRequest/Sender@PostalCode	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperZipCode
PierbridgeReturnRequest/Sender@Country	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperCountry
PierbridgeReturnRequest/Packages/Package@SenderName	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperContactName
PierbridgeReturnRequest/Packages/Package@SenderPhone	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperPhoneNumber
PierbridgeReturnRequest/Packages/Package@Weight	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@PackageActualWeight
PierbridgeReturnRequest/Packages/Package@Length	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@PackageLength
PierbridgeReturnRequest/Packages/Package@Height	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@PackageHeight
PierbridgeReturnRequest/Packages/Package@Width	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@PackageWidth
PierbridgeReturnRequest@UserName	UPSPLD/ReturnShippingLabels/ReturnShippingLabel@ShipperAccountNumber
PierbridgeShipRequest/Carrier	UPSPLD@Carrier
PierbridgeShipRequest/Packages/Package/RecordIdentifiers/RecordIdentifier/Keys/Key1	UPSPLD/PackageLevelDetail@ShipID
PierbridgeShipRequest/ShipDate	UPSPLD/PackageLevelDetail@PickupDate
PierbridgeShipRequest/RecordIdentifiers/RecordIdentifier/Keys/Key2	UPSPLD/PackageLevelDetail@ShipmentKey
PierbridgeShipRequest/Billing/PayerType	UPSPLD/PackageLevelDetail@ShipmentChgType

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeShipRequest/Billing/AccountNumber	UPSPLD/PackageLevelDetail@ConsigneeUPSAcctNumber
PierbridgeShipRequest/Receiver/CompanyName	UPSPLD/PackageLevelDetail@ConsigneeCompanyName
PierbridgeShipRequest/Receiver/Street	UPSPLD/PackageLevelDetail@ConsigneeAddress1
PierbridgeShipRequest/Receiver/Locale	UPSPLD/PackageLevelDetail@ConsigneeAddress2
PierbridgeShipRequest/Receiver/Other	UPSPLD/PackageLevelDetail@ConsigneeAddress3
PierbridgeShipRequest/Receiver/City	UPSPLD/PackageLevelDetail@ConsigneeCity
PierbridgeShipRequest/Receiver/Region	UPSPLD/PackageLevelDetail@ConsigneeStateProv
PierbridgeShipRequest/Receiver/PostalCode	UPSPLD/PackageLevelDetail@ConsigneePostalCode
PierbridgeShipRequest/Packages/Package/ReceiverPhone	UPSPLD/PackageLevelDetail@ConsigneePhone
PierbridgeShipRequest/Receiver/Country	UPSPLD/PackageLevelDetail@ConsigneeCountry
PierbridgeShipRequest/Packages/Package/ReceiverEmail	UPSPLD/PackageLevelDetail@ConsigneeEmailAddress
PierbridgeShipRequest/RecordIdentifiers/RecordIdentifier/Keys/Key1	UPSPLD/PackageLevelDetail@ShipmentNumber
PierbridgeShipRequest/Billing/PayerType	UPSPLD/PackageLevelDetail@ActualFreightTerms
PierbridgeShipRequest//Packages/Package/WayBillNumber	UPSPLD/PackageLevelDetail@PackageTrackingNumber
PierbridgeShipRequest/ServiceType	UPSPLD/PackageLevelDetail@UPSServiceType
PierbridgeShipRequest//Packages/Package/PackageType	UPSPLD/PackageLevelDetail@PackagingType

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeShipRequest/Packages/Package/Weight	UPSPLD/PackageLevelDetail@PackageActualWeight
PierbridgeShipRequest//Packages/Package/COD/Value	UPSPLD/PackageLevelDetail@CODAmount
PierbridgeShipRequest//Packages/Package/COD/Type	UPSPLD/PackageLevelDetail@CODFundsInd
PierbridgeShipRequest//Packages/Package/COD/ValueCurrency	UPSPLD/PackageLevelDetail@ShipmentCODCurrencyCode
PierbridgeShipRequest/SaturdayDelivery	UPSPLD/PackageLevelDetail@SatDeliveryInd
PierbridgeShipRequest//Packages/Package/Oversize	UPSPLD/PackageLevelDetail@OversizePackageInd
PierbridgeShipRequest/Receiver/Residential	UPSPLD/PackageLevelDetail@ResInd
PierbridgeShipRequest/International/AESTransactionNumber	UPSPLD/PackageLevelDetail@ITNEntry
PierbridgeShipRequest/Sender/SentBy	UPSPLD/PackageLevelDetail@SenderName
PierbridgeShipRequest/Sender/SentBy	UPSPLD/PackageLevelDetail@ShipperContactName
PierbridgeShipRequest/Sender/Street	UPSPLD/PackageLevelDetail@ShipperAddress1
PierbridgeShipRequest/Sender/Locale	UPSPLD/PackageLevelDetail@ShipperAddress2
PierbridgeShipRequest/Sender/Other	UPSPLD/PackageLevelDetail@ShipperAddress3
PierbridgeShipRequest/Sender/City	UPSPLD/PackageLevelDetail@ShipperCity
PierbridgeShipRequest/Sender/Region	UPSPLD/PackageLevelDetail@ShipperStateProv
PierbridgeShipRequest/Sender/Region	UPSPLD/PackageLevelDetail@ShipperState

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeShipRequest/Sender/PostalCode	UPSPLD/PackageLevelDetail@ShipperPostalCode
PierbridgeShipRequest/Sender/PostalCode	UPSPLD/PackageLevelDetail@ShipperZipCode
PierbridgeShipRequest/Sender/Phone	UPSPLD/PackageLevelDetail@ShipperPhoneNumber
PierbridgeShipRequest/Sender/Phone	UPSPLD/PackageLevelDetail@SenderPhone
PierbridgeShipRequest/Sender/Country	UPSPLD/PackageLevelDetail@ShipperCountry
PierbridgeShipRequest/Sender/Email	UPSPLD/PackageLevelDetail@ShipperEmailAddress
PierbridgeShipRequest/CloseShipment	UPSPLD/PackageLevelDetail@IsLastPackageInShipment
PierbridgeShipRequest/Packages/Package/International/Hazardous	UPSPLD/AccessorialRecord@HazMat
PierbridgeShipRequest/Packages/Package/Length	UPSPLD/AccessorialRecord@PackageLength
PierbridgeShipRequest/Packages/Package/Width	UPSPLD/AccessorialRecord@PackageWidth
PierbridgeShipRequest/Packages/Package/Height	UPSPLD/AccessorialRecord@PackageHeight
PierbridgeShipRequest/Packages/Package/DeliveryConfirmation	UPSPLD/SpecialServices/SpecialService@SignatureRequiredFlag
PierbridgeShipRequest/Packages/Package/DeliveryConfirmation	UPSPLD/SpecialServices/SpecialService@SignatureRequiredType
PierbridgeShipRequest/International/TotalDutyValue	UPSPLD/InternationalRecord@InvoiceLineTotals
PierbridgeShipRequest/International/TotalDutyValue	UPSPLD/InternationalRecord@ShipmentInsuranceDeclaredValue

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeShipRequest/International/UltimateDestinationCountry	UPSPLD/InternationalRecord@UltimateDestCountry
PierbridgeShipRequest/Packages/Package/International/Contents/Content/PurchaseOrderNumber	UPSPLD/InternationalRecord@PONumber
PierbridgeShipRequest/Packages/Package/International/Contents/Content/ItemDescription	UPSPLD/InternationalRecord@DescriptionOfGoods
PierbridgeShipRequest/International/AESTransactionNumber	UPSPLD/InternationalRecord@AESTransactionNumber
PierbridgeShipRequest/Packages/Package/International/Contents/Content/ItemDescription	UPSPLD/CommodityRecord@DescriptionOfGoods
PierbridgeShipRequest/Packages/Package/International/Contents/Content/ItemCode	UPSPLD/CommodityRecord@PartNumber
PierbridgeShipRequest/Packages/Package/International/Contents/Content/OriginCountry	UPSPLD/CommodityRecord@LineOriginCountry
PierbridgeShipRequest/Packages/Package/International/Contents/Content/Quantity	UPSPLD/CommodityRecord@LineQuantity
PierbridgeShipRequest/Packages/Package/International/Contents/Content/ItemDescription	UPSPLD/CommodityRecord@LineMerchantDesc1
PierbridgeShipRequest/Packages/Package/International/Contents/Content/Value	UPSPLD/CommodityRecord@LineExtendedAmt
PierbridgeShipRequest/Packages/Package/International/Contents/Content/Weight	UPSPLD/CommodityRecord@CommodityWeight

Table 2–8 Field-Level Mapping for Sterling Pierbridge Adaptor

Field Name	Sterling Pierbridge Adaptor Attribute
PierbridgeShipRequest/Outputs/Output/PrinterID	UPSPLD/ExtraFieldsRecord@ThermalLabelPrinterID
PierbridgeShipRequest/Outputs/Output/PrinterID	UPSPLD/ExtraFieldsRecord@ShipmentDocumentPrinterID
PierbridgeShipRequest/Billing/AccountNumber	UPSPLD/AlternatePartyRecord@ID_AccountNumber
PierbridgeShipRequest/Billing/CompanyName	UPSPLD/AlternatePartyRecord@CompanyName
PierbridgeShipRequest/Billing/Street	UPSPLD/AlternatePartyRecord@Address1
PierbridgeShipRequest/Billing/Locale	UPSPLD/AlternatePartyRecord@Address2
PierbridgeShipRequest/Billing/Other	UPSPLD/AlternatePartyRecord@Address3
PierbridgeShipRequest/Billing/City	UPSPLD/AlternatePartyRecord@City
PierbridgeShipRequest/Billing/Region	UPSPLD/AlternatePartyRecord@StateProv
PierbridgeShipRequest/Billing/PostalCode	UPSPLD/AlternatePartyRecord@PostalCode
PierbridgeShipRequest/Billing/Country	UPSPLD/AlternatePartyRecord@Country
PierbridgeShipRequest/UserName	UPSPLD/PackageLevelDetail@ShipperAccountNumber
PierbridgeShipRequest/Packages/Package/ReceiverName	UPSPLD/PackageLevelDetail@ConsigneeAttention
PierbridgeShipRequest/Packages/Package/ShipperReference	UPSPLD/PackageLevelDetail@PBShipperReference

2.4 Using User Exits

User exits are provided in the Parcel Carrier Adapters to facilitate the implementation of different logic.

The following user exits are supported for the Parcel Carrier Adapters:

- YCSshipCartonUserExit
- YCScloseManifestUserExit
- YCSdeleteCartonUserExit

For more information about these user exits, see the *Selling and Fulfillment Foundation: Javadocs*.

Implementation

There is a class for each user exit, which is called from the application.

For example: A user wants to use the shipCarton user exit for a ShipCarton Transaction. There is a Java interface for this transaction for which the user exit has been defined. That is, shipCarton is defined in the Java interface YCSshipCartonUserExit.

This file has to be compiled and the path of the class file should be specified using the User Exit Management in the Applications Manager. For more information about User Exit Management, see the *Selling and Fulfillment Foundation: Application Platform Configuration Guide*.

Configuring the Parcel Carrier Adapters

This chapter describes the configuration of the Parcel Carrier Adapters.

Although, the Parcel Carrier Adapters come with pre-installed carrier configuration data, carriers can modify their service offerings based on business plans. This may require you to modify the configuration data at such times.

Configuring the Parcel Carrier Adapters involve the following:

- [Setting Up the Parcel Carrier Adapters Properties](#)
- [Standard Configurations Packaged](#)
- [Pre-Configured Carriers](#)

3.1 Setting Up the Parcel Carrier Adapters Properties

The Parcel Carrier Adapters require relevant values for the following parameters:

- ConnectShip Server URL
- FedEx logon parameters
- XML Logging
- AgileElite Server URL
- AgileElite Default User for Rate Request
- AgileElite DB Server logon parameters

These values are stored in the `<INSTALL_DIR>/properties/yfs.properties_ycs_ext` file. To modify

any of these parameters, add an entry for them in the `<INSTALL_DIR>/properties/customer_overrides.properties` file or rerun the install script.

For additional information about overriding properties using the `customer_overrides.properties` file, see the *Selling and Fulfillment Foundation: Properties Guide*.

3.2 Standard Configurations Packaged

The Parcel Carrier Adapters support the following carriers out-of-the-box:

Table 3–1 Carriers supported by Sterling Parcel Carrier Adapters

Carrier	Sterling FedEx Adaptor	Sterling ConnectShip Adaptor	Sterling Pierbridge Adaptor
Federal Express (FedEx)	Yes	No	Yes
United Parcel Service United States (UPSN)	No	Yes	Yes
United Parcel Service Canada (UPSC)	No	Yes	Yes
United Parcel Service Europe (UPSE)	No	Yes	Yes
United Parcel Service Asia Pacific (UPSA)	No	Yes	Yes
United Parcel Service Latin America (UPSL)	No	Yes	Yes
United States Postal Service (USPS)	No	No	Yes
Purolator	No	No	Yes

3.3 Pre-Configured Carriers

The Parcel Carrier Adapters application is pre-configured for the following carriers:

- [Federal Express \(FedEx\) Services and Special Services](#)
- [United Parcel Service \(UPS\) Services and Special Services](#)
- [United States Postal Service \(USPS\) Services and Special Services](#)
- [Purolator Services and Special Services](#)

3.3.1 Federal Express (FedEx) Services and Special Services

This section provides a list of the services and special services provided for FedEx.

Services

The Sterling FedEx Adaptor and the Sterling Pierbridge Adaptor supports the following carrier services for FedEx:

- FedEx Priority Overnight
- First Overnight
- 2 Day
- Standard Overnight
- Express Saver
- 1 Day Freight
- 2 Day Freight
- 3 Day Freight
- FedEx Ground
- Extra Hours
- Home Delivery
- International Priority
- International Economy
- International First

- International Priority Freight
- International Economy Freight

Special Services

The Sterling FedEx Adaptor supports the following special services for FedEx:

- Saturday Delivery
- Saturday Pickup
- COD
- Ship Alert
- Adult Signature Required
- Indirect Signature Required

The Sterling Pierbridge Adaptor supports the following special services for FedEx:

- Saturday Delivery
- Adult Signature Required
- Indirect Signature Required

3.3.2 United Parcel Service (UPS) Services and Special Services

This section provides a list of the services and special services provided for UPS.

3.3.2.1 United Parcel Service United States (UPSN)

Services

The Sterling ConnectShip Adaptor and the Sterling Pierbridge Adaptor supports the following carrier services for UPSN:

- UPS NEXT DAY AIR
- UPS NEXT DAY AIR SAVER
- UPS 2ND DAY AIR

- UPS 2ND DAY AIR AM
- UPS GROUND
- UPS 3 DAY SELECT
- UPS EARLY AM
- UPS WORLDWIDE EXPEDITED
- UPS WORLDWIDE EXPRESS
- UPS WORLDWIDE EXPRESS PLUS

Special Services

The Sterling ConnectShip Adaptor supports the following special services for UPSN:

- Declared Value Insurance
- Collect on Delivery
- Tagless COD
- Signature Required
- Adult Signature Required
- Delivery Confirmation
- Shipment Notification
- Saturday Delivery
- Saturday Pickup

The Sterling Pierbridge Adaptor supports the following special services for UPSN:

- Saturday Delivery
- Delivery Confirmation - Signature Required
- Delivery Confirmation - Adult Signature Required

3.3.2.2 United Parcel Service Canada (UPSC)

Services

The Sterling ConnectShip Adaptor supports the following carrier services for UPSC:

- CANADA UPS EXPRESS
- CANADA UPS EXPRESS SAVER
- CANADA UPS EXPEDITED
- CANADA UPS STANDARD
- CANADA UPS EXPRESS EARLY AM

Special Services

The Sterling ConnectShip Adaptor supports the following special services for UPSC:

- Declared Value Insurance
- Collect on Delivery
- Tagless COD
- Signature Required
- Adult Signature Required
- Delivery Confirmation
- Shipment Notification
- Saturday Delivery
- Saturday Pickup

3.3.2.3 United Parcel Service Europe (UPSE)

Services

The Sterling ConnectShip Adaptor supports the following carrier services for UPSE:

- EUROPE UPS EXPRESS
- EUROPE UPS EXPRESS SAVER

- EUROPE UPS EXPEDITED
- EUROPE UPS STANDARD

Special Services

The Sterling ConnectShip Adaptor supports the following special services for UPSE:

- Declared Value Insurance
- Collect on Delivery
- Tagless COD
- Signature Required
- Adult Signature Required
- Delivery Confirmation
- Shipment Notification
- Saturday Delivery
- Saturday Pickup

3.3.2.4 United Parcel Service Asia Pacific (UPSA)

Services

The Sterling ConnectShip Adaptor supports the following carrier services for UPSA:

- APAC UPS EXPRESS
- APAC UPS WORLWIDE EXPEDITED
- APAC UPS WORLWIDE EXPRESS
- APAC UPS WORLWIDE EXPRESS PLUS

Special Services

The Sterling ConnectShip Adaptor supports the following special services for UPSA:

- Declared Value Insurance
- Collect on Delivery

- Tagless COD
- Signature Required
- Adult Signature Required
- Delivery Confirmation
- Shipment Notification
- Saturday Delivery
- Saturday Pickup

3.3.2.5 United Parcel Service Latin America (UPSL)

Services

The Sterling ConnectShip Adaptor supports the following carrier services for UPSL:

- LATAM UPS EXPRESS
- LATAM UPS WORLWIDE EXPEDITED
- LATAM UPS WORLWIDE EXPRESS
- LATAM UPS WORLWIDE EXPRESS PLUS

Special Services

The Sterling ConnectShip Adaptor supports the following special services for UPSL:

- Declared Value Insurance
- Collect on Delivery
- Tagless COD
- Signature Required
- Adult Signature Required
- Delivery Confirmation
- Shipment Notification
- Saturday Delivery
- Saturday Pickup

3.3.3 United States Postal Service (USPS) Services and Special Services

This section provides a list of the services and special services provided for USPS.

Services

The Sterling ConnectShip Adaptor and the Sterling Pierbridge Adaptor supports the following carrier services for USPS:

- USPSPriority
- USPSStandard

Special Services

The Sterling ConnectShip Adaptor supports the following special services for USPS:

- Saturday Delivery
- Signature Confirmation

The Sterling Pierbridge Adaptor supports the following special services for USPS:

- Saturday Delivery
- Signature Confirmation

3.3.4 Purolator Services and Special Services

This section provides a list of the services and special services provided for Purolator.

Services

The Sterling Pierbridge Adaptor supports the following carrier services for Purolator:

- Purolator Air 9:00 AM
- Purolator Air 10:30 AM
- Purolator Air
- Purolator Ground

Special Services

The Sterling Pierbridge Adaptor supports the following special services for Purolator:

- Saturday Delivery

Integrating the Sterling Parcel Carrier Adapters with Carrier Servers

This chapter explains the integration of the Parcel Carrier Adapters (Sterling FedEx Adaptor, Sterling ConnectShip Adaptor, and Sterling Pierbridge Adaptor) with carrier servers, ConnectShip, PowerShip for FedEx, and Pierbridge. This chapter provides detailed information about:

- [Integrating with ConnectShip](#)
- [Integrating with PowerShip](#)
- [Integrating with the AgileElite Shipment Server](#)

Note: The Parcel Carrier Adapters integrate only with the parcel services, and not with the LTL/TL (Less-Than Truck Load/Truck Load) services.

4.1 Integrating with ConnectShip

ConnectShip provides a suite of products to integrate with various carriers. At the core of this product line is Prologistics, which provides full functionality access to many parcel carriers (including UPS) in a carrier independent approach. Prologistics conforms to Microsoft's Internet technologies like ASP, COM/DCOM and requires Windows-based systems running IIS.

ConnectShip Toolkit, another product of ConnectShip, provides XML over HTTP-based APIs to access these Prologistics features.

The Sterling ConnectShip Adaptor uses APIs provided by ConnectShip Toolkit to integrate with all carriers. For more information about ConnectShip capabilities, visit the following Web site:

<http://www.connectship.com>

4.1.1 Installing the ConnectShip Toolkit

ConnectShip Toolkit can be downloaded from the 'members area' of ConnectShip website (<http://www.connectship.com>).

- ConnectShip requires the installation of IIS. For more information about installing ConnectShip, see ConnectShip website.
- While installing choose all the relevant Carrier components, like UPS Domestic, UPS Europe, UPS Canada, UPS Latin America (including Mexico), and UPS Asia Pacific.
- Also choose the relevant printer device models, such as, Eltron, Zebra, and Windows Printer.

4.1.2 Configuring the ConnectShip Server

On successful installation, ConnectShip ToolKit is accessible through IIS. This is installed under `C:\Inetpub\wwwroot\Progistics` and is accessible with Internet Explorer at `http://localhost/Progistics/ASP/index.asp` (This link is relative to the server where this software is installed).

Some minimal configuration is required on the ConnectShip server, including creating shippers, and registering the shippers with carriers. This configuration is available under Progistics configuration link.

In configuring a shipper, ensure that shipper abbreviation is mapped to `ShipperAccountNumber` on the Sterling ConnectShip Adaptor.

Warehouse Management System sets the `ShipperAccountNumber` Parcel Carrier Adapters XML attribute with the Shipping Account Number in ScacEx setup for ShipNode and Enterprise.

Keep the `Abbreviation` attribute on ConnectShip exactly the same as that of `ShipperAccountNumber`. But it would be better if there is a mapping created on the Sterling ConnectShip Adaptor (through `YCS_GENERAL_CODES` table) between `Abbreviation` on ConnectShip with `ShipperAccountNumber` from WMS.

4.1.3 Printing Labels and Documents

Labels and documents can be printed by ConnectShip to a network printer or to a local printer. Alternatively, ConnectShip can also return a label buffer to the Sterling ConnectShip Adaptor for printing. For more information about printing labels, [Section 4.1.4.2.6, "Printing and Saving UPS Labels"](#).

4.1.4 Software Components

4.1.4.1 Open Manifest

ConnectShip does not have a corresponding API. It automatically opens a new manifest for the pickup date and the Shipper when the first package is being manifested. While the Sterling ConnectShip Adaptor allows multiple open manifests for a given day for UPS packages, ConnectShip does not support this. ConnectShip allows only one open manifest for a Shipper for a given day. To open a second manifest, the first one has to be closed. So, while integrating with ConnectShip, the Sterling ConnectShip Adaptor ensures that only one open manifest exists for UPS for a given day. To identify if ConnectShip integration is being used, the Sterling ConnectShip Adaptor checks the existence of `Logic_Switch` attribute with "CS_SHIP" and `Api_Name` attribute with SHIPCARTON in `YCS_PROCESS_CONTROL`.

4.1.4.2 Add Containers to Manifest

ConnectShip provides two APIs called `SHIPREQUEST` and `SHIPMENTREQUEST` for manifesting a package. Both have similar XMLs and the Sterling ConnectShip Adaptor uses the `SHIPMENTREQUEST` API. Apart from manifesting the package, it also returns Tracking #, rating details, and prints labels. This API accepts Shipper, Carrier and Service, Consignee details, and Package & Special Services details as input.

The Sterling ConnectShip Adaptor exposes `CS_SHIP` as a Transaction (in `YCS_PLD_DETAIL` table and `Logic_Switch` in `YCS_PROCESS_CONTROL` table). If this is configured for the Carrier in which the package is being shipped, then ConnectShip integration is called.

Out-of-the-box, this integration is provided for UPS. FedEx continue to communicate directly to PowerShip.

This component of the Sterling ConnectShip Adaptor transforms the input XML to ConnectShip's requirements based on configuration present in YCS_PLD_DETAIL table. Factory defaults are provided for YCS_PLD_DETAIL for UPS/CS_SHIP.

4.1.4.2.1 Shipping international Shipments

These are shipments originating from USA to a consignee in a different country. The Sterling ConnectShip Adaptor integration with ConnectShip for international shipments is different from domestic shipments in the US.

For international shipments, integration with ConnectShip occurs at a Shipment level and not at the Package level. This is required since freight charges at Shipment level is less than the sum of freight charges for individual packages.

The Sterling ConnectShip Adaptor internally calls ConnectShip SHIPMENTREQUEST API, which prints a label for the package and also manifest it. However, in the case of international shipments, ConnectShip is called only after all the packages in the shipment are manifested.

Labels for all packages along with Commercial invoice for Shipment is printed when the last package in the shipment is manifested. The `IsLastPackageInShipment` attribute has been added to `PackageLevelDetail` in `shipCarton` input XML.

Logic for determining whether a package requires Shipment/Package level integration is determined based on Carrier Service code. `YFS_SCAC_AND_SERVICE` table has a column called `IsShipment_Level_Intg_Reqd` based on which the switch occurs.

Note that International shipments have different Service codes as compared to Domestic Services. This is because Domestic shipments would sometimes require Shipment level integration.

Other additional setup required is:

Mapping between Country codes sent by WMS and the Country Symbol code as required by ConnectShip. In YCS_PLD_DETAIL table, two ConnectShip XML nodes, `SHIPMENTREQUEST/PACKAGES/PKG/CONSIGNEE/COUNTRYSYMBOL` and `SHIPMENTREQUEST/PACKAGES/PKG/PACKAGESERVICEOPTIONS/INTL/COMMODITYCONTENTS/CONTENT/ORIGINCOUNTRY` require this mapping. These fields are mapped to `UPSPLD/PackageLevelDetail@ConsigneeCountry`

and `UPSPLD/CommodityRecord@LineOriginCountry` attributes on the input XML.

If international shipments are to be sent for countries other than US and Canada, user needs to insert data in `YCS_GENERAL_CODES` table. For example, if you want to ship to Germany, the Sterling Warehouse Management System code is DE, and ConnectShip maps it to GERMANY. Insert the following record in the `YCS_GENERAL_CODES` table:

```
INSERT INTO YCS_GENERAL_CODES (GENERAL_CODES_KEY, CARRIER,
CARRIER_ADAPTER_IMPL_KEY, CODE, VALUE, DESCRIPTION) values
('PrimaryKey1', UPSN, 'ConnectShipAdaptor', 'DE', 'GERMANY',
'UPSPLD/PackageLevelDetail@ConsigneeCountry');
```

Similar record must be inserted for the `UPSPLD/CommodityRecord@LineOriginCountry` attribute.

As a factory setup, the Sterling ConnectShip Adaptor only provides the mapping for US, passed in the input XML by WMS, to "UNITED_STATES", as required by ConnectShip. Similar mappings would be required for other countries. The Carrier Code to be passed to ConnectShip is `TANDATA_UPS.UPS`.

Carrier Service Codes are different for international shipments and domestic shipments. ConnectShip provides three service codes for International shipments: `WEPD`, `WEXPPLS` & `WEXP`. Only these Services can be passed. Default factory data is provided for this mapping based on default WMS configuration. `WEPD` is mapped to 08, `WEXPPLS` to 54 and `WEXP` to 71.

ConnectShip treats UPS Carrier code for Shipments from Canada, Europe, APAC, Latin America and US all differently.

4.1.4.2.2 Shipments from Canada

UPS Carrier Code for Canada is `TANDATA_UPSCANADA.UPS`.

4.1.4.2.3 Shipments from Europe

UPS Carrier Code for Shipments from Europe is `TANDATA_UPSINTL.UPS`.

4.1.4.2.4 Shipments from APAC

UPS Carrier Code for Shipments from Asia Pacific region is `TANDATA_UPSAPAC.UPS`.

4.1.4.2.5 Shipments from Latin America (including Mexico)

UPS Carrier Code for Shipments from Latin America is TANDATA_UPSLATAM.UPS.

4.1.4.2.6 Printing and Saving UPS Labels

ConnectShip enables automatic printing of UPS labels for the package being manifested. ConnectShip supports printing of US Domestic MaxiCode labels, Canada MaxiCode labels as well as Standard UPS label for shipments from other countries. The factory setup provided by WMS supports printing of MaxiCode labels for US Domestic Shipments and Canada shipments. For rest of the countries, the printing utilizes Standard labels.

ConnectShip also provides the capability to save UPS labels in PNG format. To enable this, you must configure parcel carrier preferences appropriately. For more information about configuring parcel carrier preferences, see the *Sterling Warehouse Management System: Configuration Guide*. ConnectShip returns the label URL in the SHIPMENTRESPONSE input XML whenever a package is manifested using the SHIPMENTREQUEST input XML.

Table 4–1 Label Format Codes

Carrier Code	Domestic/International	Label Format
UPSN	DOMESTIC	TANDATA_UPS_MAXICODE_US_DOMESTIC.STANDARD
UPSN	INTERNATIONAL	TANDATA_UPS_MAXICODE_US_INTL.STANDARD
UPSC	DOMESTIC	TANDATA_UPS_MAXICODE_CANADA.STANDARD
UPSC	INTERNATIONAL	TANDATA_UPS_MAXICODE_CANADA.STANDARD
UPSE	DOMESTIC	TANDATA_STDLABEL.STANDARD
UPSE	INTERNATIONAL	TANDATA_STDLABEL.STANDARD
UPSA	DOMESTIC	TANDATA_STDLABEL.STANDARD
UPSA	INTERNATIONAL	TANDATA_STDLABEL.STANDARD

Table 4–1 Label Format Codes

Carrier Code	Domestic/International	Label Format
UPSL	DOMESTIC	TANDATA_STDLABEL.STANDARD
UPSL	INTERNATIONAL	TANDATA_STDLABEL.STANDARD

The label format to be printed is determined as follows:

- The Sterling ConnectShip Adaptor internally sets the “UPSPLD/ExtraFieldsRecord@LabelFormatValue” input XML attribute to either DOMESTIC/INTERNATIONAL based on origin and destination countries.
- The Sterling ConnectShip Adaptor looks up YCS_PLD_DETAIL table to get the mapping for CarrierFieldName SHIPMENTREQUEST/PACKAGES/PKG/LABELFORMAT and it’s DefaultType & DefaultValue.
- For UPSN, the DefaultType is set as MAPPING and mapped to “UPSPLD/ExtraFieldsRecord@LabelFormatValue” input XML attribute.
- In the YCS_GENERAL_CODES table, DOMESTIC has been mapped to “TANDATA_UPS_MAXICODE_US_DOMESTIC.STANDARD” and INTERNATIONAL to “TANDATA_STDLABEL.STANDARD”.
- For other Carriers (UPSC, UPSE, UPSA & UPSL), the DefaultType is set to SYSTEM and DefaultValue to TANDATA_STDLABEL.STANDARD.

ConnectShip supports printing labels on many printers. Significant among them are many models of Zebra printers as well as Eltron printer models.

Following are the ConnectShip values for various printer models:

- ELTRON_2044
- ELTRON_2348
- ELTRON_2543
- ZEBRA_90XIII
- ZEBRA_170XIII
- ZEBRA_105SE
- ZEBRA_140

- ZEBRA_105
- ZEBRA_170
- ZEBRA_220
- ZEBRA_S300
- GENERIC.WINDOWSPRINTER

Irrespective of whether the Printer is a Zebra/Eltron or a different model, ConnectShip prints to that printer if printer driver is installed on the machine where ConnectShip is installed, by passing the PrinterModelSymbol as "GENERIC.WINDOWSPRINTER".

ConnectShip can also return the label string back to the Sterling ConnectShip Adaptor if the Printer Port is passed as "STRING" instead of a PrinterName. Label string that ConnectShip returns is based on the PrinterModel that is passed to it. However Port cannot be passed as "STRING" if PrinterModelSymbol is passed as "GENERIC.WINDOWSPRINTER". PLD setup provided in factory setup for printing is listed below. In B2C scenarios where a shipment is predominantly a single package shipment, implementations can pass the value "STRING" in the "UPSPLD/ExtraFieldsRecord@ThermalLabelPrinterID" Parcel Carrier Adapters input XML attribute to get back the Printer string and print this UPS label as a part of a A4 Packing slip.

Table 4–2 PLD Factory Setup For Printing

Carrier Field Name	Field Name	Default Value
SHIPMENTREQUEST/PACKAGES/PKG/LABELPRINT/PORT	UPSPLD/ExtraFieldsRecord@ThermalLabelPrinterID	NA
SHIPMENTREQUEST/PACKAGES/PKG/LABELPRINT/STOCKSYMBOL	NA	THERMAL_LABEL_8
SHIPMENTREQUEST/PACKAGES/PKG/LABELPRINT/PRINTERMODELSYMBOL	NA	GENERIC.WINDOWSPRINTER

4.1.4.2.7 Printing Other Documents

ConnectShip also prints shipment level documents like Commercial Invoice, SED, and Certificate of Origin. These documents are valid only for international shipments, as integration at shipment level occurs only for international shipments. The Sterling ConnectShip Adaptor prints these documents only when the last international package is being manifested.

Note: In order to print shipment level documents, you need to install the Sterling Warehouse Management System on top of Selling and Fulfillment Foundation.

Shipment Level documents that need to be printed can be configured in YCS_PLD_Detail. The Sterling ConnectShip Adaptor provides printing of Commercial Invoice in the Factory setup. Additional documents can just be similarly added. The attribute `ShipmentDocumentPrinterID` added to the Sterling ConnectShip Adaptor input XML obtains the printer details for printing these documents.

4.1.4.2.8 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–3 YCS Process Control

Carrier	API Name	Logic Switch
UPSN/UPSE/UPSL/UPSA /UPSC	SHIPCARTON	CS_SHIP

YCS_GENERAL_CODES

Table 4–4 YCS General Codes

Carrier	Input XML Field Name	Notes
UPSN/UPSE/UPSL/UPSA /UPSC	UPSPLD/PackageLevelDetail@ ShipperAccountNumber	ShipperAccountNumber sent from WMS should be mapped to Shipper setup on ConnectShip.

4.1.4.3 Close Manifest

ConnectShip provides an API called “CloseOutRequest” to close the manifest. The Sterling ConnectShip Adaptor accepts Carrier, Manifest#, and ShipperAccountNumber as inputs for closing a manifest. The Sterling ConnectShip Adaptor changes the status of manifest and deletes all packages (YCS_MANIFEST_UPS_DTL) on the Sterling ConnectShip Adaptor database and then calls ConnectShip’s CloseOutRequest API.

The Sterling ConnectShip Adaptor additionally checks to see if all printed packages are manifested. If any of the packages have not been manifested, this API throws an error. Such packages have to be removed from the manifest (either by User or by WMS) and reprinted (by manifesting them). For shipment level integration, actual manifestation of packages with ConnectShip happens when the last carton in the shipment is manifested on WMS. However, if user is trying to close the manifest even before all the packages in a shipment are manifested, then the Sterling ConnectShip Adaptor automatically calls ConnectShip’s SHIPMENTREQUEST API to close all these shipments. Note that WMS actually disallows closure of Manifest if all packages are not manifested. But this helps in situations where all packages in a Shipment are manifested by user and when WMS fails to specify the last package to the Sterling ConnectShip Adaptor. This would typically happen if the last package was deleted from WMS before it was manifested.

4.1.4.3.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–5 YCS Process Control

Carrier	API Name	Logic Switch
UPSN	CLOSEMANIFEST	CS_CLOSE_MANIFEST

YCS_GENERAL_CODES

Table 4–6 YCS General Codes

Carrier	Input XML Field Name	Notes
UPSN/UPSE/UPSL/UPSA/UPSC	Manifest@ShipperAccountNumber	ShipperAccountNumber sent from WMS should be mapped to Shipper setup on ConnectShip.

YCS_PLD_DETAIL

Table 4–7 YCS Pld Details

Carrier: UPSN	Transaction: CS_CLOSE_MANIFEST	Sub Transaction: Request
Carrier Field Name	Field Name	Default Value
CLOSEOUTREQUEST/LOGIN/LOGINID	NA	TEST
CLOSEOUTREQUEST/LOGIN/PASSWORD	NA	TEST
CLOSEOUTREQUEST/CLOSEOUT/SC	Manifest@Carrier	NA
CLOSEOUTREQUEST/CLOSEOUT/SHIPPER	Manifest@ShipperAccountNumber	NA
CLOSEOUTREQUEST/CLOSEOUT/CLOSEOUTITEM	Manifest@PickupDate	NA

4.1.4.4 Remove Containers From Manifest

ConnectShip provides an API called “Void Request”. VoidRequest ConnectShip API requires Shipper# and MSN (Master Sequential Number). ConnectShip identifies a package using MSN and it returns this MSN when a package is included into a manifest using SHIPMENTREQUEST API.

4.1.4.4.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–8 YCS Process Control

Carrier	API Name	Logic Switch
UPSN	VOIDCARTON	CS_VOID

YCS_GENERAL_CODES

Table 4–9 YCS General Codes

Carrier	Input XML Field Name	Notes
UPSN/UPSE/UPSL /UPSA/UPSC	DelPackage@ShipperAccountNumber	ShipperAccountNumber sent from WMS should be mapped to Shipper setup on ConnectShip.

YCS_PLD_DETAIL

ConnectShip/Sterling ConnectShip Adaptor XML mapping is mentioned below. Mapping is done from getXML output of the YCS_PLD_DETAIL table (for the Tracking # passed in input XML to the Parcel Carrier Adaptors) to input required for ConnectShip. Root node for YCS_Pld_Detail.getXML is the same as input XML passed to the Sterling ConnectShip Adaptor.

Table 4–10 YCS Pld Details

Carrier: UPSN	Transaction: CS_SHIP	Sub Transaction: Request
Carrier Field Name	Field Name	Default Value
VOIDREQUEST/LOGIN/LOGINID	NA	TEST
VOIDREQUEST/LOGIN/PASSWORD	NA	TEST

Table 4–10 YCS Pld Details

Carrier: UPSN	Transaction: CS_SHIP	Sub Transaction: Request
Carrier Field Name	Field Name	Default Value
VOIDREQUEST/SC	DelPackage@Carrier	NA
VOIDREQUEST/SHIPPER	DelPackage@ShipperAccountNumber	NA

4.1.4.5 Print Container Labels

The Sterling ConnectShip Adaptor component generates Tracking # and prints the carton label without actually manifesting it. WMS implementations may want carrier carton labels to be printed during wave release or at the time of manifest. Implementations that need these labels to be printed during wave release can use this component.

ConnectShip allows user to generate Tracking # and return rating information without actually manifesting the containers.

During actual manifestation, Sterling ConnectShip Adaptor also checks to see if the package has been modified after it was printed. If package was modified, then it would return an error to inform the user to void the package and reprint it. To determine if Package is modified, it would check to see if the following attributes have changed or not:

- PackageActualWeight
- ConsigneeAddress1
- ConsigneeAddress2
- ConsigneeCity
- PickupDate

4.1.4.5.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–11 YCS Process Control

Carrier	API Name
UPSN	TRACK_AND_PRINT

YCS_PLD_DETAIL

Since this component internally calls ConnectShip's SHIPMENTREQUEST API, the Sterling ConnectShip Adaptor uses "CS_SHIP" transaction's PLD setup. For more information, see [Section 4.1.4.2, "Add Containers to Manifest"](#).

4.1.4.6 Reprint Container Labels

The Sterling ConnectShip Adaptor component regenerates carton labels and reprint the labels for cartons for which the tracking numbers have already been generated.

4.1.5 Adding New Carriers and Services to the Sterling ConnectShip Adaptor

This section describes the process of adding new carriers and services to the Sterling ConnectShip Adaptor.

4.1.5.1 Adding New Carriers to the Sterling ConnectShip Adaptor

Selling and Fulfillment Foundation can be easily configured to integrate with the Sterling ConnectShip Adaptor to support other carrier services. For more information about the carriers and services, see [Section 3.3, "Pre-Configured Carriers"](#). To add a new carrier to the Sterling ConnectShip Adaptor, perform the following steps:

1. From the YCS_PROCESS_CONTROL table, copy only those records that have UPSC as the Carrier Code, insert the records into the same table, and change the Carrier Code to that of the new carrier.
2. From the YCS_GENERAL_CODES table, copy only those records that have UPSC as the Carrier Code, insert the records into the same table, and change the Carrier Code to that of the new carrier.

The YCS_GENERAL_CODES table provides a translation of the Selling and Fulfillment Foundation XML attribute values to ConnectShip-specific values with respect to some of the attributes. Most of these attributes, such as Sunday Delivery Required, Residential Flag, and Consignee Country are not specific to any particular carrier, and can be copied from UPSC. However, attributes such as Carrier Service Code is specific to each carrier, and such records must be modified with appropriate ConnectShip values.

Table 4–12 lists the attributes that must be updated with ConnectShip carrier-specific values.

Table 4–12 Additional Mapping Configuration in YCS General Codes

ConnectShip Attribute	Selling and Fulfillment Foundation Attribute	Description
EODFILEREQUEST/SHIPMENT/DOCFORMAT	Manifest@DocFormat	This attribute is used for passing the Manifest document that ConnectShip prints. The document Id that prints differs from each carrier.
SHIPMENTREQUEST/SHIPMENTSERVICE/SCS	UPSPLD/PackageLevelDetail@UPSServiceType	This record translates the Selling and Fulfillment Foundation data for Carrier Service Code to ConnectShip data.
EODFILEREQUEST/SHIPMENT/SC	Manifest@Carrier	This record translates the Selling and Fulfillment Foundation data for Carrier Code to ConnectShip data when the manifest is closed on Selling and Fulfillment Foundation.

Table 4–12 Additional Mapping Configuration in YCS General Codes

ConnectShip Attribute	Selling and Fulfillment Foundation Attribute	Description
CLOSEOUTREQUEST/CLOSE OUT/SC	Manifest@Carrier	This record translates the Selling and Fulfillment Foundation data for Carrier Code to ConnectShip data when the manifest is closed on Selling and Fulfillment Foundation.
VOIDREQUEST/SC	DelPackage@Carrier	This record translates the Selling and Fulfillment Foundation data for Carrier Code to ConnectShip data when a package is removed from the Manifest on Selling and Fulfillment Foundation.

4.1.5.2 Adding New Services to the Sterling ConnectShip Adaptor

Selling and Fulfillment Foundation can be easily configured to integrate with the Sterling ConnectShip Adaptor to support other carrier services. For more information about the carriers and services, see [Section 3.3, "Pre-Configured Carriers"](#). To add a new service to the Sterling ConnectShip Adaptor, perform the following steps:

1. From the YCS_GENERAL_CODES table, copy only those records that meet all the following requirements:
 - The value of the CarrierAdapterImplKey column must be ConnectShipAdaptor.
 - The Carrier Code can be that of any carrier.
 - The Description can be either ReprintPackage@UPSServiceType or UPSPLD/PackageLevelDetail@UPSServiceType.
2. Insert these records back into the YCS_GENERAL_CODES table.

3. Make the following changes to the newly added records:
 - Carrier Code to that of the new carrier.
 - Electronic Code to that of the Electronic Code of the carrier service.
 - Service Code to that of the new Service Code. The new Service Code must be set as to the code that ConnectShip uses to address the carrier service.

4.2 Integrating with PowerShip

This section explains the integration of the Sterling FedEx Adaptor with the FedEx PowerShip server.

4.2.1 Software Components

4.2.1.1 Open Manifest

PowerShip does not have a corresponding API. It automatically opens a new manifest for the pickup date and the shipper when the first package is manifested. For FedEx packages, the Sterling FedEx Adaptor doesn't allow you to simultaneously open multiple manifests for a given day. To open a second manifest, the first manifest must be closed. Therefore, when integrating with PowerShip, the Sterling FedEx Adaptor ensures that only one open manifest exists for FedEx for a given day.

4.2.1.2 Add Containers to Manifest

PowerShip provides string-based transaction 020 for manifesting a package. When manifesting a package, the carrier label is generated for the package. Return labels can also be generated for the package if the package contains returnable items, and the FedEx carrier service used to manifest allows returns.

The Sterling FedEx Adaptor exposes transaction 020 (in the YCS_PLD_DETAIL table and Logic_Switch in YCS_PROCESS_CONTROL table).

This component of the Sterling FedEx Adaptor transforms the input XML to the requirements of PowerShip based on the configuration present in the YCS_PLD_DETAIL table. The factory defaults are provided for the YCS_PLD_DETAIL table for FEDX or 020.

4.2.1.2.1 Shipping International Shipments from USA

These are shipments originating from USA to a consignee in a different country. The Sterling FedEx Adaptor integration with PowerShip for international shipments is different from domestic shipments in the USA.

For international shipments, integration with PowerShip occurs at a shipment level and not at the package level because freight charges at shipment level is less than the sum of freight charges for individual packages.

The logic for determining whether a package requires shipment or package level integration is based on the Carrier Service code. The YFS_SCAC_AND_SERVICE table has a column Is_Shipment_Level_Intg_Reqd based on which the switch occurs.

Labels for all packages are printed when the last package in the shipment is manifested. The IsLastPackageinShipment attribute has been added to PackageLevelDetail in the shipCarton input XML.

The Sterling FedEx Adaptor uses open shipping method of PowerShip to manifest shipments that requires shipment level integration.

The Country Codes sent by the Sterling Warehouse Management System and the Country Symbol Code of the FedEx PowerShip server (FSMS) must be mapped. [Table 4–13](#) describes the field-level mapping in the YCS_PLD_DETAIL table.

Table 4–13 Mapping in the YCS_PLD_DETAIL Table

FedEx PowerShip Server	input XML of shipCarton API of the Sterling Warehouse Management System
Field ID 50	ConsigneeCountry
Field ID 74	UltimateDestCountry
Field ID 80	LineOriginCountry
Field ID 117	ShipperCountry

If international shipments are to be sent for countries other than US and Canada, user needs to insert data in YCS_GENERAL_CODES table. For example, if you want to ship to Germany, the Sterling Warehouse Management System code is DE, and FedEx maps it to GERMANY. Insert the following record in the YCS_GENERAL_CODES table:

```
INSERT INTO YCS_GENERAL_CODES (GENERAL_CODES_KEY, CARRIER,
CARRIER_ADAPTER_IMPL_KEY, CODE, VALUE, DESCRIPTION) values
('PrimaryKey1', 'FEDX', 'FedexAdaptor', 'DE', 'GERMANY',
'ShipperCountry');
```

Similar records must be inserted for the other fields mentioned in [Table 4–13, "Mapping in the YCS_PLD_DETAIL Table"](#)

Note: In the factory setup, mapping has been provided for United States and Canada as US and CA, respectively.

4.2.1.2.2 Printing and Saving FedEx Labels

PowerShip enables printing of FedEx labels automatically for packages that are manifested. PowerShip also provides the capability to save labels in PNG format in the default directory. To enable this functionality, you must configure the parcel carrier preferences appropriately. For more information about configuring parcel carrier preferences, see the *Sterling Warehouse Management System: Configuration Guide*.

FedEx generates PNG image of the carrier label for the package that is manifested if the value of the label format FSMS Field ID 187 is set to "PNG". The label is saved in the default directory of PowerShip.

The label format that is to be printed is determined as follows:

- The Sterling FedEx Adaptor internally sets the `UPSPLD/ExtraFieldsRecord@LabelFormatValue` attribute of the input XML to the Device Sub Type of the printer configured to print the FedEx label. For creating a Device Sub Type, see the *Selling and Fulfillment Foundation: Application Platform Configuration Guide*.
- The Sterling FedEx Adaptor searches in the `YCS_PLD_DETAIL` table to retrieve the records for `FieldName LabelFormatValue`. For this record, the `DefaultType` is set to `MAPPING`, and mapped to the `UPSPLD/ExtraFieldsRecord@LabelFormatValue` attribute of the input XML.
- In the `YCS_GENERAL_CODES` table, the record with `Description LabelFormatValue` and the `Code` equal to `UPSPLD/ExtraFieldsRecord@LabelFormatValue` is selected and the value of the field named `Value` of this record is passed as a label format value to FSMS.

Default mapping is provided for Eltron and Zebra printers for determining the value of field 187. The list of values that is used in field 187 for other printers are as follows:

- Unimark U550 4x6 doc tab - 177
- Unimark U550 4x6 non doc tab - 277
- Eltron LP2348 or LP2443 4x6 doc tab - 199
- Eltron LP2348 or LP2443 4x6 non doc tab - 299
- Zebra DA402 4x6 doc tab - 188
- Zebra DA402 4x6 non doc tab - 288
- Laser - DIB

The reprint of carrier labels is supported only by the printer type that printed the same carrier label previously, although different physical devices are available to print the carrier label.

4.2.1.2.3 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–14 YCS Process Control

Carrier	API Name	Logic Switch
FEDX	SHIPCARTON	020

4.2.1.3 Close Manifest

PowerShip provides transaction 007 to close a manifest.

4.2.1.3.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–15 YCS Process Control

Carrier	API Name	Logic Switch
FEDX	CLOSEMANIFEST	007

YCS_PLD_DETAIL

Table 4–16 YCS Pld Details

Carrier: FEDX	Transaction: 007	Sub Transaction: Request
Field Location	Field Name	Default Value
0	TransactionType	007
498	ShipperAccountNumber	

4.2.1.4 Remove Containers From Manifest

PowerShip provides transaction 023 to remove containers from manifest. This transaction requires shipper account number and tracking number. PowerShip identifies a package using the tracking number. In case of shipment level integration, the entire shipment is unmanifested when a container belonging to the shipment is removed from manifest.

4.2.1.4.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–17 YCS Process Control

Carrier	API Name	Logic Switch
FEDX	VOIDCARTON	023

YCS_PLD_DETAIL

PowerShip/Sterling FedEx Adaptor mapping is mentioned below.

Table 4–18 YCS Pld Details

Carrier: FEDX	Transaction: 023	Sub Transaction: Request
Field Location	Field Name	Default Value
0	TransactionType	023
29	TrackingNumber	NA
498	ShipperAccountNumber	NA

4.2.1.5 Print Container Labels

The Sterling FedEx Adaptor component generates the tracking number and prints the carton label without manifesting the carton. WMS implementations may want carrier carton labels to be printed during wave release or at the time of manifest. Implementations that need these labels to be printed during wave release can use this component.

PowerShip enables the user to generate tracking number and return rating information without manifesting the containers.

During manifestation, the Sterling FedEx Adaptor verifies if the package is modified after printing it. To determine this, the Sterling FedEx Adaptor checks whether the following attributes are changed:

- PackageActualWeight
- ConsigneeAddress1

- ConsigneeAddress2
- ConsigneeCity
- PickupDate

If the package is modified, the Sterling FedEx Adaptor throws an error. To reprint the package, you must void it.

4.2.1.5.1 Configuration Dependencies

YCS_PROCESS_CONTROL

Table 4–19 YCS Process Control

Carrier	API Name
FEDX	TRACK_AND_PRINT

YCS_PLD_DETAIL

As this component internally calls transaction 020 of PowerShip, the Sterling FedEx Adaptor uses the PLD setup of transaction 020. For more information about the PLD setup of transaction 020, see [Section 4.2.1.2, "Add Containers to Manifest"](#).

4.2.1.6 Reprint Container Labels

The Sterling FedEx Adaptor component regenerates carton labels and reprint the labels for cartons for which the tracking number and a carton label have already been generated.

4.3 Integrating with the AgileElite Shipment Server

The AgileElite shipment server provides a unified view of multiple carriers, including UPS, USPS, FedEx, and Purolator in a carrier-independent approach through its XML interface. It allows shipping functionalities, such as Ship, Rate, and Void. The AgileElite shipment server is an open Web service built on Microsoft .NET, and is highly scalable and reliable. For more information about Pierbridge's capabilities, visit the following Web site:

<http://www.pierbridge.com>

4.3.1 Installing the AgileElite Shipment Server

Before installing the AgileElite shipment server, ensure that all the corresponding prerequisites are met. For more information about how to install the AgileElite shipment server and the prerequisites, refer the corresponding Pierbridge documentation.

When installing the AgileElite shipment server, install the following components:

- Pierbridge Administrators Toolbar
- Pierbridge FSMS Label Server
- Pierbridge Shipment Server

Note: Because the AgileElite shipment server uses Microsoft SQL Server 2005, sqljdbc.jar version 1.2 must be installed in Selling and Fulfillment Foundation. For more information about installing the sqljdbc.jar file, refer to the *Selling and Fulfillment Foundation: Installation Guide*.

Note: The AgileElite shipment server uses the ConnectShip server to integrate with the UPS and USPS carriers. Similarly, this server connects to the FedEx PowerShip Server for integrating with FedEx-supported carriers. Both the ConnectShip server and the FedEx server should be installed and configured on the machine where the AgileElite shipment server is installed in order to integrate with the carriers supported by them.

4.3.2 Configuring the AgileElite Shipment Server

Configurations pertaining to the following must be performed on the AgileElite shipment server:

- Organization and Location - An organization is an entity that ships packages. The AgileElite shipment server setup requires at least one organization to be added to the AgileElite shipment server.

A location refers to an organization's address. Every organization must have at least one location associated with it. The address will be overridden by the transactional requests sent by the Sterling Pierbridge Adaptor. The Sterling Warehouse Management System will not use the details pertaining to the organization that has been added to the AgileElite shipment server.

- **Carrier** - The carriers that are supported by the Sterling Pierbridge Adaptor are listed in [Table 3-1](#). These carriers should be enabled on the AgileElite shipment server. The AgileElite shipment server uses the ConnectShip server to integrate with the UPS and USPS carriers. Ensure that these carriers are enabled in the ConnectShip server too.
- **User** - The AgileElite shipment server uses the Windows user as the AgileElite shipment server user. The transactional requests sent by the Sterling Pierbridge Adaptor are sent with respect to this Windows user that exists on the AgileElite shipment server. Therefore, when configuring a user, ensure that the Windows User Name is exactly the same as the ShipperAccountNumber on the Sterling Warehouse Management System. The Sterling Warehouse Management System sets the ShipperAccountNumber Parcel Carrier Adapters XML attribute with the Shipping Account in the Parcel Carrier Preference for ShipNode and Enterprise. Similarly, a user must be configured on the AgileElite shipment server with the same User Name as that of the default Rate Request User provided in the `<INSTALL_DIR>/properties/yfs.properties_ycs_ext` file.

After a user is configured, necessary permissions must be granted to the user in order to allow the user to perform relevant shipping activities. For activities such as shipping a container, if the bill payer is not specified in the request sent by the Sterling Pierbridge Adaptor, the bill payer value that is configured in the Default Bill Payer field in the Permissions tab of the AgileElite shipment server becomes the default value.

- **Accounts** - The AgileElite shipment server connects internally with the ConnectShip server and the FedEx server in order to ship packages using various carriers. Ensure that the necessary security credentials and account information are configured for the carriers on the AgileElite shipment server. Also ensure that the user has the required permission to ship the packages using the carriers configured on the AgileElite shipment server.

- Device - When configuring the device (in this case, a printer for printing labels) and providing a description of the printer on the AgileElite shipment server, ensure that you enter the complete path to the printer on the network. This path must match the printer alias of the printer configured on the Sterling Warehouse Management System.
- Output - In order to configure the formatting of shipping labels and other documents, provide the required permissions for the AgileElite shipment server users to allow them to print labels, return labels, and documents. All AgileElite shipment server users should be granted permission to use all the printers that are configured using the Device tab. If a user wants to save labels as images, configure the PrinterType field as Client on the AgileElite shipment server, under the Outputs tab. When this configuration is completed, the URL of the labels will be returned as output in response to the ship transaction. This URL will be in encoded format.

Notes:

- When the Save label as images option is set in the Sterling Warehouse Management System, a user must manually configure the PrinterType field as Client on the AgileElite shipment server. Also, in the AgileElite shipment server, select Images from the Format drop-down list by navigation to Outputs > Config.
- When a user wants to print a label using a specific printer, and if that printer is incorrectly configured in the Outputs tab of the AgileElite shipment server, by default, the label is printed using the first available printer configured in the Outputs tab.
- It is recommended that in the Outputs tab of the AgileElite shipment server, you select only the specific user or user group from the User/Group drop-down list to whom you want to grant permission to perform certain configurations, and not all users.

4.3.3 Printing Labels and Documents

Labels and documents can be printed by the AgileElite shipment server to either a network printer or a local printer. Alternatively, the AgileElite shipment server can also return a label buffer to the Sterling Pierbridge Adaptor for printing. For more information about printing labels, see [Section 4.3.4.2.2, "Printing and Saving Labels"](#).

4.3.4 Software Components

This section explains the various transactions available with the AgileElite shipment server.

4.3.4.1 Open Manifest

The AgileElite shipment server does not have a corresponding API. It automatically opens a new manifest for the pickup date and the shipper when the first package is being manifested. The Sterling Pierbridge Adaptor doesn't allow to simultaneously open multiple manifests on a given day and for a carrier. The Sterling Pierbridge Adaptor also allows only one open manifest for a shipper for a given day. To open a second manifest, you must close the first manifest. So, when integrating with the AgileElite shipment server, the Sterling Pierbridge Adaptor ensures that only one open manifest exists for a carrier on a given day.

4.3.4.2 Add Containers to Manifest

The AgileElite shipment server provides the ShipRequest transaction for manifesting a package. Apart from manifesting the package, this transaction also returns the tracking number, rating details, and prints the labels. This transaction accepts the details pertaining to the Shipper, Carrier and Service, Consignee, Package, and Special Services as inputs. When manifesting a package, a carrier label is generated for the package. Return labels can also be generated for the package if the package contains returnable items, and the carrier service used to manifest allows returns. The returns functionality is available for both FedEx and UPSN carriers that use the Sterling Pierbridge Adaptor.

The Sterling Pierbridge Adaptor transforms the input XML to the AgileElite shipment server's requirements based on the configurations present in the YCS_PLD_DETAIL table.

4.3.4.2.1 Shipping International Shipments

The international shipments originate from a country and go to a consignee located in a different country. The Sterling Pierbridge Adaptor integration with the AgileElite shipment server for international shipments is different from domestic shipments.

For international shipments, integration with the AgileElite shipment server occurs at a shipment level and not at the Package level. This is because freight charges at the shipment level is less than the sum of the

freight charges for individual packages. For international shipments, after the pack process, it is mandatory to enter the ITN#.

For domestic shipments, the Sterling Pierbridge Adaptor internally calls AgileElite shipment server's ShipRequest transaction, which prints a label for the package and also manifest it. However, in the case of international shipments, AgileElite shipment server transaction is called only after all the packages in the shipment are manifested.

Labels for all the packages along with the Commercial Invoice for a shipment is printed when the last package in the shipment is manifested. The `IsLastPackageInShipment` attribute has been added to `PackageLevelDetail` in the `shipCarton` input XML.

Note: In order to print shipment level documents, you need to install the Warehouse Management System on top of Selling and Fulfillment Foundation.

Logic for determining whether a package requires Shipment or Package level integration is determined based on the Carrier Service code. The `Is_Shipment_Level_Intg_Reqd` column in the `YFS_SCAC_AND_SERVICE` table helps to determine whether a package requires Shipment or Package level integration.

Note: The international shipments have different service codes as compared to domestic shipments. This is because domestic shipments sometimes require shipment level integration.

4.3.4.2.2 Printing and Saving Labels

The AgileElite shipment server provides the functionality to automatically print labels for packages that are manifested. AgileElite shipment server also provides the capability to save labels in .png format by configuring the parcel carrier preferences appropriately. For more information about configuring the parcel carrier preferences, see the *Sterling Warehouse Management System: Configuration Guide*. The AgileElite shipment server returns the label URL in the `ShipResponse` input XML whenever a package is manifested using the `ShipResponse` input XML.

The AgileElite shipment server supports most of the printer models for printing labels, including Zebra and Eltron.

Following are the various printer models available on the AgileElite shipment server:

- Generic
- Generic Windows
- Eltron 2044
- Eltron 2348
- Eltron 2442
- Eltron 2543
- Generic Epson
- Unimark U501
- Zebra 105
- Zebra 105Se
- Zebra 105SL
- Zebra 110XiIIIPlus
- Zebra 140
- Zebra 140XiIIIPlus
- Zebra 170
- Zebra 170XiII
- Zebra 170XiIIIPlus
- Zebra 220
- Zebra 2746e
- Zebra 2844
- Zebra 2844-Z
- Zebra 3842
- Zebra 3844-Z
- Zebra 90XiII

- Zebra Ht-146
- Zebra R4Mplus
- Zebra Stripe S300
- Zebra Stripe S500
- Zebra Stripe S600
- Zebra R110Xi
- Zebra Z4M Plus

Irrespective of the printer model, AgileElite shipment server prints to any printer whose printer driver is installed on the machine where the AgileElite shipment server is installed, and is configured as Generic Windows on the AgileElite shipment server.

Based on the PrinterType configurations carried out on the AgileElite shipment server, the AgileElite shipment server will either return the URL of the label, or print the label.

To switch between the printing tasks, you must manually modify the configurations on the AgileElite shipment server. In Selling and Fulfillment Foundation, the behavior of the reprint transaction depends on the AgileElite shipment server configuration.

For more information about configuring the AgileElite shipment server, see [Section 4.3.2, "Configuring the AgileElite Shipment Server"](#).

4.3.4.2.3 Printing Other Documents

The AgileElite shipment server also prints shipment-level documents such as Commercial Invoice, Certificate Of Origin, and Shipper's Export Declaration (SED). These documents are valid only for international shipments because integration at the shipment level occurs usually for international shipments. The Sterling Pierbridge Adaptor prints these documents only when the last international package is manifested.

Note: In order to print shipment level documents, you need to install the Sterling Warehouse Management System on top of Selling and Fulfillment Foundation.

The shipment-level documents that are to be printed can be configured in the `YCS_PLD_DETAIL` table. The Sterling Pierbridge Adaptor provides the capability to print Commercial Invoices in the factory setup. Additional documents can be printed similarly. The `ShipmentDocumentPrinterID` attribute of the Sterling Pierbridge Adaptor input XML obtains the printer details for printing these documents.

4.3.4.3 Close a Manifest

The AgileElite shipment server provides the `EndOfDayActionRequest` transaction to close a manifest. The Sterling Pierbridge Adaptor accepts carrier code, manifest number, and shipper account number as inputs for closing a manifest. The Sterling Pierbridge Adaptor changes the status of the manifest, deletes all the packages on the `YCS_MANIFEST_UPS_DTL` Sterling Pierbridge Adaptor database, and invokes the `EndOfDayActionRequest` transaction.

4.3.4.4 Remove Containers From a Manifest

The AgileElite shipment server provides the `VoidRequest` transaction to remove a container from a manifest. This transaction requires the shipper account number and tracking number. The AgileElite shipment server identifies a package based on the tracking number, and returns this number when a package is included in a manifest using the `ShipRequest` transaction.

4.3.4.5 Print Container Labels

The Sterling Pierbridge Adaptor generates the tracking number and prints the carton label without manifesting it. The Sterling Warehouse Management System implementations may want carrier carton labels to be printed either during wave release or at the time of manifest. Implementations that require these labels to be printed during wave release can use this printing mechanism.

The AgileElite shipment server enables users to generate the tracking number and returns the rating information without manifesting the containers.

During manifestation, the Sterling Pierbridge Adaptor also verifies if the package has been modified after it is printed. If the package has been modified, it returns an error, informing the user to void the package and reprint it. To determine if the package is modified, Sterling Pierbridge Adaptor verifies whether any of the following attributes have changed:

- PackageActualWeight
- ConsigneeAddress1
- ConsigneeAddress2
- ConsigneeCity
- PickupDate

4.3.4.6 Reprint Container Labels

The Sterling Pierbridge Adaptor component regenerates carton labels and reprints the labels for cartons for which the tracking numbers have already been generated. To reprint a label, ensure that the PrinterType field in the Outputs tab is configured as Windows on the AgileElite shipment server.

4.3.5 Adding New Carriers and Services to the Sterling Pierbridge Adaptor

This section describes the process of adding new carriers and services to the Sterling Pierbridge Adaptor.

Note: If you are performing an upgrade, for an existing carrier that is not given as part of the factory setup, integration with the Sterling Pierbridge Adaptor will take place only after you perform the steps mentioned in the subsequent sections.

4.3.5.1 Adding New Carriers to the Sterling Pierbridge Adaptor

Selling and Fulfillment Foundation can be easily configured to integrate with the Sterling Pierbridge Adaptor to support other carrier services. For more information about the carriers and services, see [Section 3.3, "Pre-Configured Carriers"](#). To add a new carrier to the Sterling Pierbridge Adaptor, perform the following steps:

1. From the YCS_GENERAL_CODES table, copy only those records that have the value of the CarrierAdapterImplKey column as PierbridgeAdaptor, and the Carrier Code can be any carrier.
2. Insert all these records back into the YCS_GENERAL_CODES table, and change the Carrier Code to that of the new carrier that is to be added.

The YCS_GENERAL_CODES table provides a translation of the Selling and Fulfillment Foundation XML attribute values to Pierbridge-specific values with respect to some of the attributes. Most of the attributes, such as Sunday Delivery Required, Residential Flag, and Consignee Country, are not specific to a particular carrier, and can be copied from any carrier. However, attributes such as Carrier Service Code is specific to each carrier, and such records must be modified with the appropriate AgileElite shipment server values.

3. From the YFS_SCAC_ADAPTER_SUPPORT table, copy any record that has the value of the CarrierAdapterImplKey column as PierbridgeAdaptor, and the Carrier can be any carrier.
4. Insert the record back into the YFS_SCAC_ADAPTER_SUPPORT table, and change the Carrier to that of the new carrier that is to be added.

4.3.5.2 Adding New Services to the Sterling Pierbridge Adaptor

Selling and Fulfillment Foundation can be easily configured to integrate with the Sterling Pierbridge Adaptor to support other carrier services. For more information about the carriers and services, see [Section 3.3, "Pre-Configured Carriers"](#). To add a new service to the Sterling Pierbridge Adaptor, perform the following steps:

1. From the YCS_GENERAL_CODES table, copy only those records that meet all the following requirements:
 - The value of the CarrierAdapterImplKey column must be PierbridgeAdaptor.

- The Carrier Code can be that of any carrier.
 - The Description can be either FreightCharge/Shipment@Service, ReprintPackage@UPSServiceType, UPSPLD/PackageLevelDetail@UPSServiceType, or UPSPLD/ReturnShippingLabels/ReturnShippingLabel@UPSServiceType.
2. Insert all these records back into the YCS_GENERAL_CODES table.
 3. Make the following changes to the newly added records:
 - Carrier Code to that of the new carrier
 - Electronic Code to that of the Electronic Code of the carrier service.
 - Service Code to that of the new Service Code. The new Service Code must be set as the code that the AgileElite shipment server uses to address the carrier service.

Troubleshooting Connectivity Issues

This chapter describes some issues that are commonly encountered with the Parcel Carrier Adapters (Sterling FedEx Adaptor, Sterling ConnectShip Adaptor, and Sterling Pierbridge Adaptor). It also includes some tips discovered during the development of the Parcel Carrier Adapters Framework.

5.1 Dumping inXML on the Parcel Carrier Adapters

To dump inXML on the Parcel Carrier Adapters, use the `<INSTALL_DIR>/properties/customer_overrides.properties` file to set the `ycs.xmlDump.directory` property. In the value for this property specify the directory, where you want the inXML file to be dumped.

For additional information about overriding properties using the `customer_overrides.properties` file, see the *Selling and Fulfillment Foundation: Properties Guide*.

5.2 SaxParseException Encountered While Manifesting a Container

The following error is displayed while manifesting a container:

```
org.xml.sax.SAXParseException
```

Cause

If a `SaxParseException` is encountered while manifesting a container, it may be due to the address line or fax number exceeding 35 and 15 characters respectively.

Resolution

This problem can be fixed by ensuring that the address line and fax number fields do not exceed 35 and 15 characters respectively.

5.3 FedEx Issues

The section describes some issues that are commonly encountered with FedEx.

5.3.1 Dumping the FedEx Input String

The flag for dumping the XML and reply buffer to a file is set to "N" by default.

In the YCS_GENERAL_CODES table, the VALUE field has to be set to "Y" for the record with the CARRIER value of "FEDX" and the CODE value of "FEDEXINXMLDUMP".

The naming convention for the dumped file name is as follows:

<CARRIER><CartonNo>.txt or <CARRIER><PalletSCM>.txt, depending on whether it is a carton SCM or pallet SCM.

For example: The name of the file maybe FEDX0000201001.txt

(Where 0000201001 is the carton number and FEDX is the Carrier)

The file is dumped into the XMLlog directory.

5.3.2 Dumping the FedEx Output String

The flag for dumping the XML and reply buffer to a file is set to "N" by default.

In the YCS_GENERAL_CODES table, the VALUE field has to be set to "Y" for the record with the CARRIER value of "FEDX" and the CODE value of "FEDEXREPLYDUMP".

The naming convention of the dumped file name is as follows:

<CARRIER><CartonNo>.txt or <CARRIER><PalletSCM>.txt, depending on whether it is a carton SCM or pallet SCM.

For example: The name of the file may be FEDX0000201001.txt

(Where 0000201001 is the carton number and FEDX is the Carrier)

The file is dumped into the XMLLog directory.

5.3.3 Label Not Getting Printed

Carton is getting manifested, but the label is not getting printed.

Cause A

The printer associated with the station is not configured, or is incorrect.

Cause B

The printer is not online or out of labels.

Cause C

Mismatch in the device subtype printer or incorrect record is present in the YCS_GENERAL_CODE table.

5.3.4 Label Not Getting Reprinted or Getting a "Tracking Number Not Found" Error When Reprinting

Label is not getting reprinted, or getting a "Tracking Number Not Found" error message when trying to reprint label.

Cause

The reprint of carrier labels is supported only by the printer type that printed the same carrier label previously, although different physical devices are available to print the carrier label.

5.3.5 Unable to Compute Freight Charge Error

You receive an "Unable to compute freight charge" error.

Cause

- In the carrier setup, external server type is not set to "F2".
- The shipping key is invalid.

Cause

The account number in the carrier code setup is wrong or the shipping key mapping in the YCS_GENERAL_CODES table is wrong. Account ID 2

in the carrier setup is not linked to the shipping key in the YCS_GENERAL_CODES tables.

5.3.6 Unable to Manifest Containers of an International Shipment

You receive a "Description 1 cannot be left blank" error.

Cause

This error message is displayed when a container is being added to manifest, and the NMFC code or the NMFC class of the item in that container is not configured.

Resolution

To resolve this issue, configure either the NMFC code or the NMFC class for each of the items being shipped in the corresponding international shipment.

5.3.7 Error Message is Displayed When Reprinting a Carrier Label

You receive a "Tracking No not found" error message when you try to reprint a carrier label.

Cause

This error message is displayed if the corresponding label was not printed during the Tracking Number generation process. This occurs if the Fedex carrier label printer document is not associated with a printer.

Resolution

To resolve this issue, the Fedex carrier label printer document should be associated to a printer. Also the current Tracking Number must be made void, and the container must be manifested again.

5.4 ConnectShip Issues

The section describes some issues that are commonly encountered with ConnectShip.

5.4.1 Manifesting Cartons that are Modified After Carrier Label Print

Carrier specific labels can be printed during Wave release using the `getTrackingNoAndPrintLabel` API.

If these cartons are modified (for example, units are added or removed from the package) before they are manifested, the Sterling ConnectShip Adaptor stops the user from manifesting such cartons.

The way to handle this situation is to undo the label print by calling the `voidTrackingNo` API and then manifest the package.

5.4.2 Closing a Manifest When Some Expected Cartons are Not Manifested

When a package label is printed during a Wave Release, a Manifest is automatically opened for the Expected Shipment Date of the package.

If the Node is unable to ship the package on that date and has to close the Manifest for the remaining packages, the label and tracking # generated for all such un-manifested packages have to be voided by calling the `voidTrackingNo` API.

5.5 AgileElite Shipment Server Issues

The section describes some issues that are commonly encountered with the AgileElite shipment server.

Error Message

Error opening input transaction.

Cause

This error message is displayed when a valid account number is not configured in the Parcel Carrier Preference window of the Selling and Fulfillment Foundation Applications Manager pertaining to a shipper.

Resolution

Configure a valid shipping account number for the shipper in the Parcel Carrier Preference window of the Selling and Fulfillment Foundation Applications Manager.

Error Message

Unit of measure for commodity is unacceptable.

Cause

This error message is displayed when a Unit of Measure (UOM), for example, pound, is not accepted by the AgileElite shipment server.

Resolution

None.

Error Message

or Length girth.

Cause

This error message is displayed when the dimensions of a container that is being manifested are not acceptable.

Resolution

None.

Error Message

Invalid FTR No.

Cause

This error message is thrown when the International Tracking Number (ITN) number is not posted for a shipment.

Resolution

None.

Error Message

Invalid Payer Type.

Cause

This error message is displayed in the context of USPS domestic shipments when manifesting using either COLLECT or Third Party billing freight terms.

Resolution

None.

Error Message

Incomplete Dimensions.

Cause

This error message is displayed when the dimensions (length, height, and width) of a package are zero.

Resolution

To resolve this issue, at the manifest station, select a valid container type for the container that is being manifested.

Error Message

Description Required for each International Package.

Cause

This error message is displayed when a container is being added to manifest, and the NMFC code or the NMFC class of the item in that container is not configured.

Resolution

To resolve this issue, configure either the NMFC code or the NMFC class for each of the items being shipped in the corresponding international shipment.

Error Message

Package #1: Invalid contact SHM5-A.

Cause

This error message is displayed when a container is being added to a manifest, and the name of the user receiving this shipment is not configured in the Sterling Warehouse Management System.

Resolution

To resolve this issue, configure the name of the user receiving the shipment in the Sterling Warehouse Management System.

Error Message

Recipient phone number cannot be left blank

Cause

This error message is displayed when invoking the addContainerToManifest API if all the contact numbers of the receiver of the shipment are left blank.

Resolution

To resolve this issue, configure the contact numbers of the receiver of the shipment.

A

APIs

- field level mapping
 - ConnectShip, 22

C

Carrier Adapters functionalities

- ConnectShip compliance, 4

Close Manifest, 4

Configuring

- FedEx, 45
 - Services, 45
 - special services, 46
- UPS, 46, 48, 49, 50
- UPSA
 - services, 49
 - special services, 49
- UPSC
 - services, 48
 - special services, 48
- UPSE
 - services, 48
 - special services, 49
- UPSL
 - services, 50
 - special services, 50
- UPSN
 - services, 46
 - special services, 47

ConnectShip

- integrating with Sterling Parcel Carrier

Adapters, 53

D

Delete Carton, 4

E

environment variable

- INSTALL_DIR, xxvii
- INSTALL_DIR_OLD, xxvii

F

FedEx

- configuring services, 45
- configuring special services, 46

I

INSTALL_DIR, xxvii

INSTALL_DIR_OLD, xxvii

M

Methods

- field level mapping
 - FedEx, 30

O

Open Manifest, 4

P

PowerShip

Integrating with Sterling Parcel Carrier

Adapters, 53

Pre-Configured Carriers, 45

Printer

Eltron LP2844, 3

S

Ship Carton, 4

Sterling Parcel Carrier Adapters, 1

configuration tables, 7

Configuring Sterling Parcel Carrier Adapters, 43

default printers, 3

integrating with

FedEx PowerShip, 2

server architecture, 1

technology overview, 1

troubleshooting

connectivity issues, 87

User exits, 41

Sterling Parcel Carrier Adapters Architecture, 1

Sterling Parcel Carrier Adapters default printers, 3

Eltron LP2844, 3

Sterling Parcel Carrier Adapters functionalities

FedEx compliance, 4

FedEx compliant

Generation of Transaction 007, 4

Generation of Transaction 020, 4

Generation of Transaction 023, 4

Generation of Transaction 037, 4

Generation of Transaction 095, 4

Open Manifest, 4

Sterling Parcel Carrier Adapters Tables

Introduction, 6

T

Transaction

Delete Carton Request/reply, 4

End Of Day Request/Reply, 4

Global Ship request/reply, 4

Label Reprint Transaction, 4

Online Return Label, 4

Transaction 007, 4

Transaction 020, 4

Transaction 023, 4

Transaction 037, 4

Transaction 095, 4

Troubleshooting

Dumping FedEx Input String, 88

Dumping FedEx Output String, 88

dumping inXML on Sterling Parcel Carrier

Adapters, 87

FedEx Specific Issues, 88

Unable to Compute Freight Charge, 89

Troubleshooting Sterling Parcel Carrier Adapters

Connectivity Issues, 87

U

UPSA

configuring services, 49

configuring special services, 49

UPSC

configuring services, 48

configuring special services, 48

UPSE

configuring services, 48

configuring special services, 49

UPSL

configuring services, 50

configuring special services, 50

UPSN

configuring services, 46

configuring special services, 47