
Comergent eBusiness System

Release 7.0.2

Implementation Guide

Sterling Commerce
An IBM Company

Comergent eBusiness System Implementation Guide

Documentation part number: 1-7.0.2-3-01

© 1998-2006 Comergent Technologies, Inc. All rights reserved.

This manual, as well as the software described in it, is furnished under license and may only be used or copied in accordance with the terms of such license. The information in this manual is furnished for information use only, is subject to change without notice, and should not be construed as a commitment by Comergent Technologies, Inc. Comergent Technologies, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

Except as permitted by license, no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form, or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of Comergent Technologies, Inc.

Comergent and the Comergent logo are registered trademarks of Comergent Technologies, Inc. Comergent eBusiness System, Comergent **C3** Analyzer, Comergent **C3** Advisor, Comergent **C3** Commerce Manager, Comergent **C3** Configurator, Comergent **C3** Integrator, Comergent **C3** Marketplace, Comergent **C3** Promotions, Comergent Message Adapters, Comergent Knowledgebase, Comergent **C3** Pricing, and Comergent **C3** Product Manager are trademarks of Comergent Technologies, Inc.

Actuate and e.Analysis are registered trademarks of Actuate Corporation. Java and all Java-based marks are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. All other company and product names may be trademarks of the respective companies with which they are associated. Docushare is a registered trademark of Xerox Corporation. This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

Preface

Welcome to the Comergent eBusiness System. This *Implementation Guide* and the associated documentation provides all the information required for you to implement the Comergent eBusiness System at your enterprise.

Purpose

This guide provides step-by-step instructions to install and implement the Comergent eBusiness System. On completion, you should be able to verify that the system is up and running, and that you can perform the basic administration steps described in the accompanying *Administration Guide*.

Audience

This guide presupposes an advanced level of information systems knowledge, familiarity with basic network and database concepts, and Java for certain implementation steps.

Conventions

Throughout this guide, we will use the following conventions shown in Table 1, "Conventions", on page iv:

TABLE 1. Conventions

Type	Convention
File names	Sample.txt
Paths and directory names	/top_level/next_level/next_level/destination_directory/
Sample code extracts	<code>public void method(String s)</code>
Values to be provided	<code><value supplied by developer></code>

Comments

We welcome your feedback. Our aim is to provide our customers with the best quality documentation possible. Let us know about any inaccuracies or missing information in our documentation. We also welcome suggestions for enhancements to our documentation. Our email address is:

`support@comergent.com`

Contents

CHAPTER 1 Architecture and Configuration Overview .1

Architecture	1
Configurations	3
<i>Platform Edition</i>	3
<i>Enterprise Edition</i>	4
<i>Comergent eBusiness System Applications</i>	4
<i>C3 Partner.com Configuration</i>	5

CHAPTER 2 Implementation Overview7

Implementation Tasks.....	7
<i>Implementation Methodology</i>	7
<i>Steps to Implementation</i>	8
Implementing the Comergent eBusiness System Integration.....	10
High Availability and Load Balancing	11
Integration Security Issues	11

CHAPTER 3 Installation Worksheet..... 13

CHAPTER 4 Installation Requirements 15

Hardware Requirements.....	15
<i>Windows 2000</i>	16
<i>UNIX</i>	16
Software Requirements	16
<i>Operating Systems</i>	16
<i>Java Development Kit</i>	17
<i>Servlet Containers</i>	17
Network Requirements	19
Browser Requirements.....	19
<i>Security Settings</i>	19
<i>Character Sets</i>	20
Database Server Requirements	20
<i>DB2</i>	21
<i>SQL Server</i>	22
<i>Oracle</i>	27
Sizing Requirements	28
Third-Party Software Requirements for Applications	28
<i>C3 Analyzer Requirements</i>	29
<i>C3 Content Manager</i>	29

**CHAPTER 5 Installing the Comergent eBusiness System
31**

Installation Overview	31
<i>Preparing to Install</i>	32
<i>Installing the Software Development Kit</i>	33
<i>Installing the Comergent eBusiness System</i>	33
<i>Deploying the Comergent Web Application</i>	33
<i>Database Server Steps</i>	33
<i>Setting up a Partner Enterprise Server</i>	33
Preparing to Install	33
<i>Known Issues</i>	35
Installing the Software Development Kit.....	36

Installing the Comergent eBusiness System.....	37
<i>Project Property File Settings</i>	48
<i>Email Addresses</i>	49
<i>ObjectMap Settings</i>	50
Deploying the Comergent Web Application.....	51
<i>XML Parser Settings</i>	52
<i>Tomcat Releases</i>	53
<i>WebSphere Releases</i>	54
<i>WebLogic Releases</i>	57
<i>Solaris and Oracle OCI Driver</i>	61
<i>Further Deployment Steps</i>	61
Installing the Reference Comergent eBusiness System	61
Database Server Steps	67
<i>Support for DB2 Server</i>	68
<i>Support for Oracle Server</i>	68
<i>Support for SQL Server</i>	68
Managing Database Connections	70
<i>Configuration Files</i>	70
<i>Connection Pooling</i>	70
<i>Common Problems</i>	73
Pagination Settings	73
Setting the Product Catalog Root	73
Setting the Session Timeout	74
Modifying the URL for the Web application DTD	75
Managing Memory	76
High Availability and Clustering.....	76
Sharing Directories	77
Directory and File Organization	78
Setting Up Apache as a Front-end to Tomcat.....	80
<i>Prerequisites</i>	80
<i>Overview</i>	80
<i>Configuring Apache to Use mod_jk</i>	81
<i>Configure Tomcat to Use mod_jk</i>	82
<i>Starting Apache and Tomcat</i>	82
<i>Setting up Apache to Support SSL</i>	82
Filtering Static Content.....	84
<i>Setting up Apache to Serve Static Content</i>	84
<i>Setting up Microsoft IIS and Macromedia JRun</i>	85
<i>Creating a NSAPI Filter</i>	86

Compressing Output From the Comergent eBusiness System	87
Setting up a Partner Enterprise Server	88

CHAPTER 6 Creating and Populating the Knowledgebase..... 91

Gathering the Database Information	91
Creating the Knowledgebase Schema	92
<i>Creating the Schema</i>	93
Populating the Knowledgebase	96
<i>XML Data Format</i>	96
<i>XMLLoader Script</i>	97
<i>Encryption</i>	97
<i>Defining the Knowledgebase as the Data Source</i>	98
<i>Internationalization and Support for Locales</i>	99
<i>Database Server-Specific Steps</i>	100
<i>Data Sets</i>	101
<i>Removing Locales</i>	103
Logging into the Comergent eBusiness System	104
Data Migration	104
<i>General</i>	105
<i>Releases 5.0 and 5.1.x to Release 5.5</i>	106
<i>Release 5.5 to Release 5.5.3</i>	107
<i>Release 5.5.1 to Release 5.5.3</i>	108
<i>Release 5.5.3 to Release 5.6</i>	108
<i>Release 5.6 to Release 5.6.2</i>	109
<i>Release 5.6.2 to Release 6.0</i>	109
<i>Release 6.0 to Release 6.3</i>	114
<i>Release 6.3 to Release 6.4.1</i>	114
<i>Release 6.4.1 to Release 6.7</i>	114

CHAPTER 7 Troubleshooting and Backing Up the Comergent eBusiness System 117

Troubleshooting	117
<i>Testing with the Administration URL</i>	117
<i>Email Server</i>	117
General Troubleshooting Tips	118

Tomcat Server	118
Common Problems	118
Errors at Startup Time	118
Errors at Runtime	122
Backing Up the Comergent eBusiness System.....	127

CHAPTER 8 Customizing your Comergent eBusiness System.....129

Configuration Overview	129
Data Objects	130
Customizing Data Objects	130
Controllers	131
Business Logic Classes.....	131
JSP Pages.....	131
Customizing Catalog Navigation and Display	132
Navigation Levels	132
Catalog Display Styles.....	132
Customizing Partner Selector	132
Message Types, Entitlements, and User Roles	133
Entitlements	133
User Roles.....	133
Configuration Files	133
Customizing the Configuration Files.....	134
Populating the Knowledgebase Tables	136
Data Objects Data	136
Common Attributes	138
Request and Message Processing	139
Configuring the Data Services Layer	140
Order Process Modeler	143

CHAPTER 9 Managing Comergent eBusiness System Logging145

Logging.....	145
Logging Preferences and Configuration.....	145
Logging File Locations.....	147

CHAPTER 10 Internationalization..... 149

Overview	149
Support for Multiple Locales	150
<i>Data</i>	150
<i>Web Pages</i>	150
Locale Specification.....	151
Using Locales.....	151
<i>User Locales</i>	152
<i>Default Locales for Languages</i>	152
Creating Locales	153
Sorting in Locales	161
Setting up a Single Locale Comergent eBusiness System	162

CHAPTER 11 General Security Considerations..... 165

General Architectural Concerns	165
<i>Administration Model</i>	165
Securing Users	169
SSL support.....	169
<i>Example Usages</i>	170
Installing Certificates for SSL.....	171
<i>Overview</i>	172
Storing Data in Encrypted Form	173
<i>General Setup</i>	174
<i>Changing Encryption Algorithms</i>	177
<i>Key Stores and System Initialization</i>	179
<i>Wrapper Classes for Standard Algorithms</i>	180
<i>Key Rotation</i>	180
<i>Release 6.0 and Earlier Releases</i>	184

CHAPTER 12 Integrating with External Systems..... 187

Implementing Punchout to an External System	187
Punching Out.....	188
Punching In	191
<i>Authentication</i>	191

<i>Specifying the C3 Advisor Starting State</i>	<i>192</i>
---	------------

CHAPTER 13 C3 Configurator Integration.....195

Overview	195
<i>Punching in to the C3 Configurator</i>	<i>195</i>
Punch into C3 Configurator URL Definition	196
<i>Standard Punchin URL</i>	<i>197</i>
<i>Punching out from a Product Detail Page.....</i>	<i>197</i>
DTDs for the C3 Configurator	198
<i>DTD for Model Import.....</i>	<i>199</i>
<i>DTD for Punchin and Punchout Messages</i>	<i>209</i>
<i>DTD for Runtime XML Model File.....</i>	<i>209</i>
Sample XML for C3 Configurator	212
Model Export and Import XML Example	215

CHAPTER 14 Implementing C3 Analyzer229

Actuate Software	229
<i>Secure Actuate Server</i>	<i>230</i>
Installation	231
Configuration.....	238
<i>Actuate Server Steps</i>	<i>238</i>
<i>Comergent eBusiness System Steps.....</i>	<i>244</i>
<i>Actuate e.Report Designer Professional Steps</i>	<i>245</i>
Scheduling the Reports	247
Setting Up a Secure Actuate Server	247
<i>Security Requirements</i>	<i>247</i>
Internationalization and Localization	250
Managing Multiple C3 Analyzer Implementations	250
Migration From Previous Versions of C3 Analyzer	253
Port Access	254
Troubleshooting.....	254

CHAPTER 15 Implementing a Payment Gateway 259

Procedure for Enterprise Partner	259
Procedure for Sales Partner	261
Customizing the Payment Gateway	262
<i>Adding a Payment Gateway</i>	262
Credit Card Number Checking	263
Troubleshooting	263

CHAPTER 16 Implementing C3 Content Manager 265

Overview	265
Implementation	266
<i>Creating a Custom Content View</i>	267

CHAPTER 17 Implementing Portal Support..... 269

Overview	269
<i>Framework</i>	270
<i>Naming Conventions</i>	270
Implementation	271
<i>General Implementation Steps</i>	271
<i>Pluto Implementation</i>	273

CHAPTER 18 Implementing C3 MarketLink..... 281

C3 MarketLink for Ariba Buyer	281
<i>Overview</i>	281
<i>Setting Up</i>	282
C3 MarketLink for Commerce One	284
<i>Overview</i>	284
<i>Setting Up</i>	285

CHAPTER 19 Message Conversion..... 287

Overview	287
----------------	-----

<i>Message Families</i>	<i>288</i>
<i>Supported Conversions.....</i>	<i>288</i>
Implementing a New Mapping.....	289
Inbound Message Processing	292
Generating an Outbound Message.....	294
Extrinsic Elements.....	295
<i>Inbound Processing</i>	<i>295</i>
<i>Outbound Processing.....</i>	<i>295</i>

CHAPTER 20 Implementing Order Management Integration297

Simple ERP Integration	297
------------------------------	-----

CHAPTER 21 Order and Return Management.....299

Overview	299
<i>Order States</i>	<i>299</i>
<i>Order Line States</i>	<i>300</i>
<i>Return States.....</i>	<i>301</i>
Order Process Modeler	301
Reference Implementation Transitions.....	303
<i>Order States</i>	<i>304</i>
<i>Order Line States</i>	<i>305</i>
<i>Return States.....</i>	<i>306</i>
Setting Up Order and Return States	306
Controllers and BLCs	307
<i>C3 Orders</i>	<i>307</i>
<i>C3 Returns</i>	<i>307</i>
Messages to and from External Systems	308
<i>Example Messages.....</i>	<i>308</i>

CHAPTER 22 Integrating with External Data Sources..... 315

Comergent Schema.....	315
DataService Classes.....	316

Sales Tax Calculation.....	317
Credit Card Authorization.....	317
<i>Customization</i>	319
Loading Invoices.....	321
LDAP Authentication	322
Implementing a Single Sign-On Solution	323
<i>Profile Synchronization</i>	326
<i>Login Controllers</i>	327
<i>Logout Controllers</i>	331
RosettaNet Setup Steps	331
Sending XML Messages to an External System	333
<i>Step 1: Define a Remote Data Object</i>	333
<i>Step 2: Define a DTD</i>	334
<i>Step 3: XML Transmission Properties</i>	335
<i>Step 4: Code Changes</i>	335
<i>Step 5: Using Converters</i>	336
<i>Description of HTTP Process</i>	337
Trading Partner Enrollment Form	338

CHAPTER 23 Emulating a Browser Interface to an External System 341

Overview	341
HTMLService Class.....	342
Formats of Request and Response	343
<i>Post Request</i>	343
<i>HTML Response</i>	343
Interface Specification	344

CHAPTER 24 Customizing C3 Pricing..... 347

<i>C3 Advisor Pricing</i>	347
Price Lists.....	348
<i>Header Information</i>	348
<i>Rules</i>	348
Implementing a Pricing Engine.....	350
Using C3 Pricing for Entitlement Only.....	350

Implementing New Pricing Rule Variables	351
<i>Modifying PricingRuleVariableDefinition</i>	351
<i>Sources of Pricing Rule Variables</i>	353
Examples	353
<i>Data Source from Partner Business Object and a String Input Type</i> ..	353
<i>Data Source from Business Objects and a Number Range Input Type</i>	354
<i>Customized Data Source and a Number Range Input Type</i>	355

CHAPTER 25 Testing the Comergent eBusiness System... ***357***

Starting the Comergent eBusiness System Server	357
Troubleshooting	357
<i>Error Messages on Startup</i>	359
<i>Runtime Troubleshooting</i>	360
<i>Communication Between Enterprise Servers</i>	365

CHAPTER 26 Installing the Mobile Configurator.....***367***

Installing the Online Component	367
<i>Install the Online Component into the SDK</i>	367
<i>Install the Built JAR file into the Online System</i>	368
<i>Configure the Online System for Mobile Support</i>	368
<i>Enable Users for Mobile Access</i>	368
Installing the Mobile Configurator	369
<i>Requirements</i>	369
<i>Troubleshooting</i>	371
Loading Models and Prices	372

CHAPTER 27 Installing a Clustered Implementation.***373***

General Steps	373
<i>Terminology and Overview</i>	373
<i>Load Balancer</i>	376
<i>General Installation Instructions for Clustered Deployment</i>	376
Setting Up a WebLogic Cluster	377
<i>Web Server</i>	377

Administration and Managed Servers	377
Reloading Files	383
Running a Clustered WebLogic Installation	383
Setting Up a WebSphere Cluster	383
General	383
Setting up a WebSphere Cluster	384
Building the Comergent eBusiness System Deployment WAR File	386
Deploying the Comergent eBusiness System Web Application	387
Configuration	388
Testing the WebSphere Cluster	389
Setting Up Macromedia ClusterCATS	390
JRun	390
Requirements	390
Overview	391
Set Up Round-Robin DNS	392
Install Apache Web Servers	393
Install JRun Application Servers	393
Install Comergent eBusiness System on Two JRun Application Servers ...	396
Installing ClusterCATS	396
Creating the Cluster	401
Setting Up JRun Probe	403
Testing the System	403
References	403
Setting up a Database for Caching	404
Introduction	404
Setting up JavaSpaces for Caching	405
Introduction	405
Install the Required Servers	405

APPENDIX A JDK Patch Information..... 409

Patch Information for the Solaris Platform	409
Java Development Kit 1.2	409
Java Development Kit 1.3	413

Index 421

Architecture and Configuration Overview

This chapter presents an overview of the Comergent eBusiness System. It provides a brief description of the underlying technology and architecture and discusses the parts of the system that you need to customize to meet the needs of your installation. It also presents a description of the configurations for the Comergent eBusiness System.

Architecture

Release 7.0.2 of the Comergent eBusiness System is designed to conform to the Java 2 Platform, Enterprise Edition (J2EE) architecture as defined in *Java 2 Platform Enterprise Edition Specification, v 1.2* published by Sun Microsystems, Inc. The Comergent eBusiness System server architecture is illustrated schematically in "Logical Representation of the Comergent eBusiness System Server Architecture" on page 2.

The Comergent eBusiness System is deployed as a Web application that comprises a set of Java classes together with accompanying configuration files, HTML templates, and JSP pages. It must be installed into a servlet container that conforms to the J2EE standard. You can use an existing servlet container that conforms to the standard or deploy the Comergent eBusiness System using the servlet container that we provide as part of the distribution software. Check CHAPTER 4, "Installation Requirements" for further information.

The Comergent eBusiness System is designed to conform to the Model 2 architecture. In this architecture, three functional components referred to as the Model, View, and Controller (MVC) partition the functionality of the server into logically distinct components.

- *Model*: this component manages the data and business objects that are used by the system.
- *View*: this component is responsible for generating the content displayed to the user.
- *Controller*: this component determines the logical flow of the application. It determines what actions are performed on the model and manages the communication between model and view components.

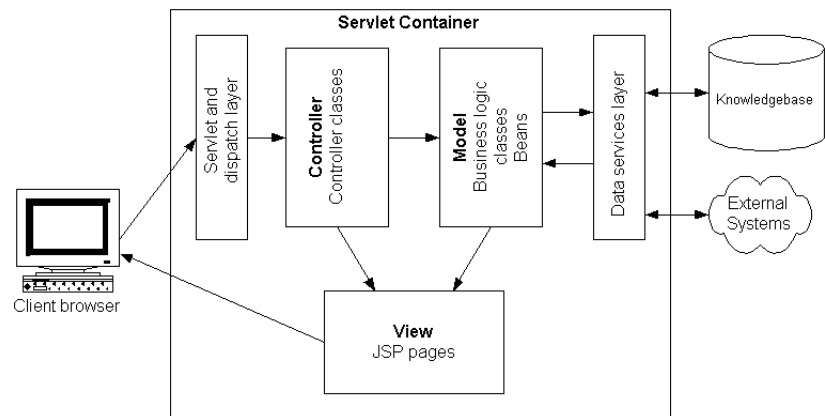


FIGURE 1. Logical Representation of the Comergent eBusiness System Server Architecture

The Comergent eBusiness System is designed to be flexible and extensible. You tailor the following components of the Comergent eBusiness System as part of the implementation of your system.

TABLE 1. Implementation Components

Component	Function
JSP pages	Customize the JSP pages that determine the look and feel of the Web pages for end-users.
XML schema and data objects	Define the data object schema as a set of XML files. These specify the structure of the data objects and the data sources that provide their content.
Business logic and BizAPI classes	These Java classes determine the business logic that processes requests and messages.
Controller classes	These Java classes handle incoming requests from customer browsers and determine how the responses are displayed.
Configuration files	Use the configuration files to determine the properties of the Comergent eBusiness System and control how incoming requests and messages are processed.

Implementation details are covered in the following chapters.

Configurations

This section provides a description of the possible configurations for the Comergent eBusiness System.

Platform Edition

This configuration provides:

- **C3 Commerce Manager:** the basic server that supports the data services layer, message passing, and system administration.

Enterprise Edition

This configuration comprises the base functionality of the Comergent eBusiness System. It supports:

- **C3 Product Manager:** this component supports the administration interface to manage the product catalog and products.
- **C3 Profile Manager:** this component supports the administrative interface to the Knowledgebase to manage partner profiles and users.
- **C3 Quotes:** this component supports the direct and indirect commerce interface to end-users.

Comergent eBusiness System Applications

In addition to the Enterprise Edition package, the Comergent eBusiness System provides a number of different applications. These components can be licensed and installed separately. They are:

- **C3 Advisor:** this component provides the administrative interface to the guided selling interface of the **C3 Quotes** component. It also provides the customer-facing applications that provide customers with the ability to navigate through your product catalog and to search the catalog.
- **C3 Analyzer:** this component provides a set of sophisticated reporting capabilities to analyze the commerce activity on your Comergent eBusiness System.
- **C3 Configurator:** this component provides support for the creation of configurable products and their use as part of the end customer experience.
- **C3 Integrator:** this component provides the means to integrate the Comergent eBusiness System with your existing ERP systems.
- **C3 Promotions:** this component provides the administrative interface to manage promotions and their assignment to products.
- **C3 MarketLink:** this component provides support for integrating the Comergent eBusiness System with external systems such as Ariba procurement systems.
- **C3 Orders:** this component provides support for the direct commerce capabilities of the Comergent eBusiness System. It provides the functionality for customers to place orders, modify or cancel orders, and

for customer service representatives to review and modify customer orders.

- **C3 Pricing:** this component provides the administrative interface to manage pricing and price lists.
- **C3 Returns:** this component provides support for managing customer returns.

C3 Partner.com Configuration

You can implement the Comergent eBusiness System to host a number of different partners each of which operate separately from each other. The implementation of this feature is different in Release 6.0 and subsequent releases from earlier releases. Previous releases required the creation of a separate Knowledgebase for each hosted partner. In this release, all of the hosted partners are supported as Partner.com partners in the same Knowledgebase. See the *Comergent eBusiness System Administration Guide* for more information.

This chapter presents an overview of implementing the Comergent eBusiness System. Its intended audience is system integrators and IT professionals charged with successfully executing an implementation of the Comergent eBusiness System. It covers both the installation of the system and the steps required to integrate the system with existing e-commerce and ERP systems.

Implementation Tasks

This section describes a suggested methodology for implementing the Comergent eBusiness System and an outline of the implementation steps.

Implementation Methodology

Comergent Technologies has developed an implementation methodology designed to manage the process of implementing the Comergent eBusiness System. Its phases are designed to ensure that implementation can be planned and tracked through to completion. Table 2, "Comergent Technologies Implementation Methodology", on page 8 provides a brief summary of the phases and the activities to complete in each phase.

A standard set of documents can be used to track each phase. Contact Comergent Technologies for further information.

TABLE 2. Comergent Technologies Implementation Methodology

Implementation phase	Description
Plan	Plan the implementation: set a timeline, milestones, and identify risks and dependencies
Analyze	Organization and administration, define business rules, user interface, messaging protocols, data sources, e-commerce flow planning, training needs, rollout strategy, environment preparation, operations planning
Design and configure	Installation, configuration, integration, unit testing, and training development
Test and deploy	Testing server configuration, enterprise to partner communication, partner to enterprise communication; cut over to production systems, distributor training, documentation delivery, support
Improve	Ongoing enhancement activities, partner training, and support

Steps to Implementation

The main tasks you perform in implementing Comergent eBusiness System are:

- *Project analysis:* agree to a schedule for the implementation project that sets a timeline. Identify milestones to measure the progress of the implementation and identify dependencies and risks that might prevent the implementation from completing on time.
- *Configuration analysis:* determine a suitable Comergent eBusiness System configuration (the number of machines to be used and their location on internal networks in relation to firewalls and proxy servers). See "High Availability and Load Balancing" on page 11 for further details about a clustered implementation.
- *Integration analysis:* identify integration points with existing e-commerce systems.
- *Requirements analysis:* check hardware and software requirements to make sure that the machines are sufficiently powerful to support the anticipated traffic and response times required. See CHAPTER 4, "Installation Requirements" for more information.

- *Installation of Comergent eBusiness System*: install the Comergent eBusiness System on the designated machine(s). See CHAPTER 5, "Installing the Comergent eBusiness System" for more information.
- *Knowledgebase setup*:
 - a. Installation of Knowledgebase: installing the Knowledgebase schema in the designated database server.
 - b. Knowledgebase setup: checking connectivity to the Knowledgebase database server and populating it with all your ecommerce-related information. This must include the partner profiles for your partners, your product catalog, and price list information.

See CHAPTER 6, "Creating and Populating the Knowledgebase" for more information.

- *Comergent eBusiness System configuration*: modify configuration files to define the system configuration in your production environment. See CHAPTER 8, "Customizing your Comergent eBusiness System" for more information.
- *Role and security definition*: define groups and roles and modify configuration files and ACL scripts accordingly. These determine the security privileges for your enterprise server users. See the *Reference Guide* for more information.
- *Schema creation*: create the business object schema to provide data source information. The data layer manages access between the enterprise server and the external systems. See the *Reference Guide* for more information.
- *Customizing BLCs and controllers*: modify business logic and controller classes to support your business logic. In some cases, you need to modify the Java classes in order to implement business processes specific to your organization.
- *Customizing JSP pages*: modify templates to meet your "look-and-feel", search, and static page requirements. The JSP pages provided by the Comergent eBusiness System are used to display the browser pages and may be customized to meet the needs of your organization.
- *Product integration*: import product information into the Knowledgebase or provide punch-out integration. If your implementation is to support product ordering from a non-Comergent product, then you need to provide a means of integrating the product data with the Comergent eBusiness System.

- *Testing server configuration*: before you deploy the Comergent eBusiness System, thoroughly test the system. We provide a number of scripts to test the chief functional components.
- *Testing enterprise to partner communication*: send test messages from the enterprise server to other enterprise servers.
- *Testing partner to enterprise communication*: send test messages from other enterprise servers to your enterprise server.
- *Assess and enhance*: once the Comergent eBusiness System is deployed you must plan for an ongoing process of analyzing its usage and performance.

Implementing the Comergent eBusiness System Integration

The Comergent eBusiness System is designed to integrate channel partners into an e-commerce network. Organizations in the network act as enterprises and partners. Each organization acting as an enterprise installs their copy of the enterprise server to transfer information to their channel partners seamlessly.

Each reseller or distributor may work with more than one enterprise, and their installation of the enterprise server must be able to receive and respond to messages from different enterprise servers. In Table 3, "Implementation Tasks", on page 10, we summarize the main activities for an implementation of the Comergent eBusiness System.

TABLE 3. Implementation Tasks

Implementation phase	Task
Plan	Project analysis
Analyze	Configuration analysis
	Integration analysis
	Requirements analysis

TABLE 3. Implementation Tasks (Continued)

Implementation phase	Task
Design and configure	Preparation of servlet container environment
	Installation of C3 Commerce Manager
	Installation of Knowledgebase
	Knowledgebase setup
	Comergent eBusiness System configuration
	Role and security definition
	System administrator authentication
	XML schema creation
	Customizing of BizAPIs, BLCs, and controllers
	Customizing JSP pages
Testing and deployment	Product integration
	Testing server configuration
	Testing enterprise to partner communication
	Testing partner to enterprise communication
	Release to production systems
Improve	Assess and enhance

High Availability and Load Balancing

Release 7.0.2 of the Comergent eBusiness System supports the ability to distribute request-handling over a number of machines. An enterprise server uses the load-balancing capabilities of the servlet container used to implement the Comergent eBusiness System. You should consult your servlet container documentation to see what options are available to you.

Integration Security Issues

Take special care to address security issues. Begin implementation only after you have addressed how users of the Comergent eBusiness System will access data provided by you and your partners.

This discussion should cover:

- authentication questions including the use of LDAP

- the use of encryption in storing data in the Knowledgebase
- the use of encryption schemes across your networks and the Internet
- direct and indirect access to ERP systems
- your existing firewalls and proxy servers

See CHAPTER 11, "General Security Considerations" for some further information.

This chapter presents a worksheet to help you gather the information that you need to install and configure the Comergent eBusiness System.

Attention: If you do not have this information, then you will not be able to install and run the Comergent eBusiness System.

- Which servlet container are you going to use for the Comergent eBusiness System? What release is this servlet container?

- What version of the Java Servlet Specification does the servlet container support?

- What is the root directory of the servlet container installation? This is referred to as ***container_home*** throughout the documentation.

- Where is the location of the servlet container library JAR files? For Tomcat, it is ***container_home/lib/*** and for Macromedia JRun, it is ***container_home/lib/ext/***.

- What Java Runtime Environment (JRE) are you using? Where is its JAVA_HOME and JDK_PATH?

-
- What is the database server to be used for the Comergent eBusiness System Knowledgebase?

-
- What interface will you use to connect to the Comergent eBusiness System Knowledgebase database server?
 - You must connect to a Universal DB2 Server using a DB2 JDBC driver.
 - You must connect to an Oracle Server using an Oracle JDBC driver.
 - You must connect to Microsoft SQL Server using the ODBCDriver class provided by the Comergent eBusiness System.

-
- What is the username and password to be used to connect to the database server?

-
- What name will you choose for the servlet context to be used for the Comergent eBusiness System?
-

This chapter presents a description of the hardware, software, and network requirements to install the Comergent eBusiness System. Make sure that your system meets these requirements before you begin installing the Comergent eBusiness System. See:

- "Hardware Requirements" on page 15
- "Software Requirements" on page 16
- "Network Requirements" on page 19
- "Browser Requirements" on page 19
- "Database Server Requirements" on page 20
- "Third-Party Software Requirements for Applications" on page 28

Pay special attention to performance requirements and what requirements that will drive in terms of hardware needs. See "Sizing Requirements" on page 28 for more information.

Hardware Requirements

This section provides a description of the minimum hardware requirements of the Comergent eBusiness System.

Windows 2000

- 512 MB of RAM
- Single or dual Intel processors rated at 400 MHz or faster

UNIX

- 512 MB of RAM
- Single or dual processors rated at 400 MHz or faster

Software Requirements

This section provides a description of the software requirements of the Comergent eBusiness System.

Operating Systems

Hewlett-Packard UNIX

- HP-UX 11.0.

Before deploying the Comergent eBusiness System on HP-UX, you must apply the JavaOOB bundle provided by Hewlett-Packard. See this URL for further information:

http://www.hp.com/products1/unix/java/java2/outofbox/infolibrary/release_notes_java_oob.html

JavaOOB is a stand-alone bundle that upon installation, installs startup (RC) scripts, modifies kernel parameters, rebuilds the kernel, and reboots the system. During startup, the startup scripts modify system tunables.

For the user used to run the servlet container, you must increase the number of files that the user may have open. Do this by running the `ulimit` command as follows:

```
>ulimit -Sn 1028
```

Deploying the Comergent eBusiness System Release 6.0 with JRun 3.1.36475 on HP-UX is equivalent to the Solaris installation with one change. Please modify the variable `SHLIB_PATH` (for HP-UX) instead of the variable `LD_LIBRARY_PATH` (for Solaris) with the proper library path.

IBM AIX

- AIX 5.2.

Microsoft Windows

- Windows 2003 Server with Service Pack 1 or Windows 2000 Server or Professional with Service Pack 4.

Sun SPARC Solaris

- Sun SPARC Solaris 9 operating environment or subsequent compatible version: see "Patch Information for the Solaris Platform" on page 409 for information relating to required Solaris patches.

Java Development Kit

You must use either JDK 1.5 or JDK 1.4.2 or subsequent compatible version. You should the most recent version of JDK 1.4.2 (currently 1.4.2_09) and it must be at least 1.4.2_06. Problems have been reported using 1.4.2_03 because it uses incompatible keystores.

SDK

You must use JDK 1.4.2 to use the SDK to install the Comergent eBusiness System and to create customizations using the SDK.

Servlet Containers

The Comergent eBusiness System has been certified to run in the following servlet containers. Install your servlet container before installing the Comergent eBusiness System.

Follow and complete the installation instructions for your selected servlet container.

TABLE 4. Servlet Container Support

Servlet Container	Vendor	Release	Servlet Specification Support
Tomcat ^a	Open Source	5.5.17 with JDK 1.5 5.5.9 with JDK 1.4: this requires installing the compatability package On Windows installations, you must set the JVM used to the client jvm.dll	2.3
WebLogic	BEA Systems	8.1 SP5	2.3
WebSphere	IBM	5.1.1.7	2.3

- a. We suggest that you use Tomcat to test your implementation of the Comergent eBusiness System before deploying it to your production systems.

The Comergent eBusiness System is designed to run in any J2EE-compliant servlet container. Contact Comergent Technologies regarding installing your Comergent eBusiness System in another servlet container that meets this specification.

Servlet Container Clustering

The Comergent eBusiness System is designed as a fully J2EE-compliant Web application capable of being deployed in any servlet container that supports the J2EE standard. It can be deployed to all servlet containers that are operating within a cluster or it can be deployed to independent servlet containers that are operating behind a load-balancing solution such as Cisco Local Director.

See "High Availability and Clustering" on page 76 for more information on implementing a clustered solution. See CHAPTER 27, "Installing a Clustered Implementation" for more information about setting up clustered implementations:

- See "Setting Up a WebLogic Cluster" on page 377 for information relating to WebLogic clustering.
- See "Setting Up Macromedia ClusterCATS" on page 390 for information relating to JRun clustering.

Network Requirements

The Comergent eBusiness System machine(s) must also be able to establish a JDBC or an ODBC connection to the database server that is used in conjunction with the Comergent eBusiness System. You must ensure that the appropriate database client software is installed on the Comergent eBusiness System machine. See CHAPTER 5, "Installing the Comergent eBusiness System" for more information.

Browser Requirements

To access and use the enterprise administration pages, users must run Internet Explorer 5.5 or subsequent compatible versions, or Firefox 1.0.x, or Netscape 7.x and subsequent compatible versions. This requirement includes partner users performing administrative tasks on the Comergent eBusiness System.

All of the external customer-facing pages support Internet Explorer 5.5 and Netscape Navigator 7.0 and subsequent compatible versions.

Security Settings

You must enable your browser to support scripting.

Internet Explorer

1. Select **Internet Options...** from the Tools menu.
2. Click the Security tab.
3. Click **Custom Level...**
4. Under Scripting, make sure that Active scripting is enabled.
5. Click **OK**.
6. Click **OK**.

Netscape Navigator

1. Select **Preferences...** from the Edit menu.

2. Select **Advanced**.
3. If the **Enable Javascript for Navigator** check box is not already checked, then check it.

Character Sets

Bear in mind that browsers used by Comergent eBusiness System users must support the character sets required to display the data correctly. If your implementation of the Comergent eBusiness System manages data from non-ASCII character sets, then make sure that the browser is set to support Unicode characters.

In particular, make sure that dialog boxes use fonts that support these characters. On Windows systems, this is set using the Display Properties control panel applet.

1. Select **Start -> Settings -> Control Panel**, and start the Display applet. Alternatively, right click the Desktop background and select **Properties**.
2. Click **Appearance**.
3. Select Message Box from the **Item** drop-down list.
4. Select a Unicode font, for example Arial Unicode MS.
5. Click **Apply**.

Database Server Requirements

Release 7.0.2 of the Comergent eBusiness System requires one of the following database servers to act as the Knowledgebase database.

Attention: We strongly suggest that you run the database server on a separate machine from the Comergent eBusiness System.

You must ensure that there is a valid userid (username/password pair) set up on this database that acts as the authenticated userid for all Comergent eBusiness System connections to this database. This userid must have the necessary privileges to create, modify, and execute database objects. Make sure that the database default character set is set to UTF-8 Unicode.

Make sure that you have the appropriate client tools installed on the Comergent eBusiness System machine(s). In particular, make sure that you have or can obtain the appropriate JDBC library files from Microsoft, Oracle, or IBM if you plan to deploy against SQL Server, Oracle, or DB2 respectively.

DB2

IBM DB2 Version 8.2 or a subsequent compatible version. The database server must support stored procedures, and hence must have the C compiler installed. Make sure that you have installed the DB2 Application Development Client as part of the DB2 server. If you plan to use the gcc compiler, log in as the UNIX user used to run the DB2 database server, and then you must run a command like this (all one line):

```
db2set DB2_SQLROUTINE_COMPILE_COMMAND usr/vac/bin/xlc
      -I$HOME/sqlllib/include SQLROUTINE_FILENAME.c
      -bE:SQLROUTINE_FILENAME.exp -e SQLROUTINE_ENTRY -q64
      -o SQLROUTINE_FILENAME -L$HOME/sqlllib/lib -ldb2"
```

The exact form of the command will depend on your environment: in particular, on the location of your C compiler. The -q64 flag is used only if DB2 is running in 64-bit mode. Check the DB2 documentation for details.

Make sure that you set the codeset to be UTF-8; for example:

```
create database <database_name> codeset UTF-8 territory US
collate using system DFT_EXTENT_SZ 2
CATALOG TABLESPACE managed by Database using (File 'catalogfile'
10000)
USER TABLESPACE managed by Database using (File 'userfile' 10000)
TEMPORARY TABLESPACE managed by Database using (File 'tempfile' 10000)
```

You must set the STMTHEAP database server parameter to 10000. You must set the APPLHEAPSZ parameter to at least 2048. You can update parameters by logging in to the DB2 database server and then entering:

```
>db2 update dbm cfg for database <database_name> using STMTHEAP 10000
>db2 update dbm cfg for database <database_name> using APPLHEAPSZ 2048
```

You must also ensure that the pagesize for the database is set to 16K. A default installation of DB2 sets the pagesize to 4K. The following DB2 commands increase the pagesize for a sample database:

```
create bufferpool datapool size 50 pagesize 16K
```

Restart the DB2 database server to activate the bufferpool:

```
db2stop force;
db2start;
```

Create the tablespaces:

```
create system temporary tablespace temporary pagesize 16K managed by
database using File(file) extentsize 2 bufferpool datapool
create tablespace debsspace pagesize 16K managed by database
using File(file) extentsize 2 bufferpool datapool
```

You can drop the USER tablespace so that your tablespace can be the default for everything that is created.

Check your DB2 Universal Server documentation for further details.

SQL Server

SQL Server 2005

Microsoft SQL Server Release 2005 or subsequent compatible version running on Windows 2003 Server. You must connect to this SQL server using the JDBC drivers provided by Microsoft. You can download these from: <http://msdn.microsoft.com/data/ref/jdbc/> (note that this URL is subject to change).

You must configure the SQL Server to not return UPDATE counts. You can do this by executing the following commands in the SQL Server Management Studio:

```
USE master;  
GO  
EXEC sp_configure 'disallow results from triggers', '1';  
RECONFIGURE WITH OVERRIDE;
```

SQL Server 2000

Microsoft SQL Server Release 2000 Service Pack 3 or subsequent compatible version running on Windows 2000 Server.

You must set up an ODBC source to point to the database server on each of the machines that will connect with the Comergent eBusiness System Knowledgebase: typically, this will be at least the machine on which you run the SDK to install the Comergent eBusiness System WAR file, and the (possibly different) machine on which the servlet container runs into which you deploy the Comergent eBusiness System. Make sure that you use exactly the same ODBC source name on all machines used to connect to the database server. See "To Set Up SQL Server as an ODBC Source" on page 23 for further details.

General Requirements

When you set up the SQL Server, you must specify that the database character set is Unicode. You must also set up the SQL Server client software on the Comergent eBusiness System machine to use Unicode. On the servlet container machine:

1. Start the SQL Server Client Network Utility.
2. On the DB-Library Options tab, uncheck **Automatic ANSI to OEM conversion**.

3. Click **Apply**, and then **OK**.

If you use SQL Server, then a search that includes the following characters will return zero results: é, ö, ü, ç.

To Set Up SQL Server as an ODBC Source

This section describes how to set up a SQL Server database server as an ODBC source on a Windows 2000 machine.

1. Click **Start -> Settings -> Control Panel**.
2. Double-click **Administrative Tools**.
3. Double-click **Data Sources (ODBC)**.

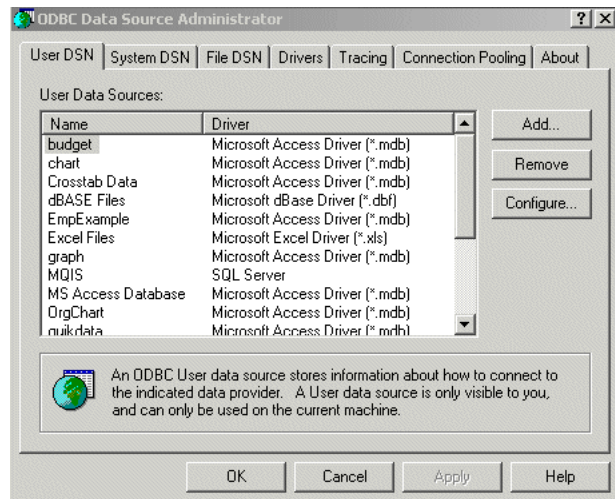


FIGURE 2. ODBC Data Source Administrator Window

4. Click **System DSN**.
5. Click **Add...**
6. In the Create New Data Source window, scroll down and select “SQL Server”.
7. Click **Finish**.

The Create a New Data Source to SQL Server window is displayed.

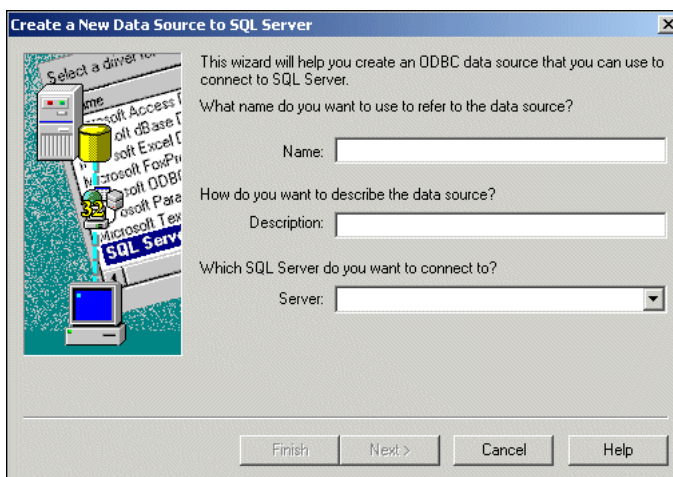


FIGURE 3. Create a New Data Source to SQL Server Window

8. Enter a Name for the data source. This name will be used to refer to the data source in the Comergent eBusiness System configuration files. Optionally, enter a description for the new data source.
9. Select the SQL Server instance from the Server drop-down list. If you cannot find the intended SQL Server instance, then contact your network administrator to resolve this problem.
10. Click **Next >**.
11. On the next window, select the With SQL Server authentication radio button.

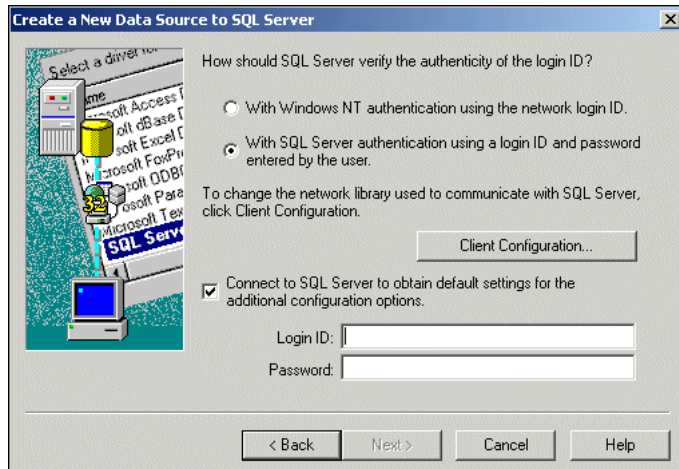


FIGURE 4. Create a New Data Source to SQL Server Window: SQL Server Authentication

12. Make sure that the SQL Server authentication check box is checked, and enter the Login ID and Password for the SQL Server to be used to connect to the SQL Server instance.
13. Click **Next >**.
14. On the next window, you should be able to leave the defaults unchanged:

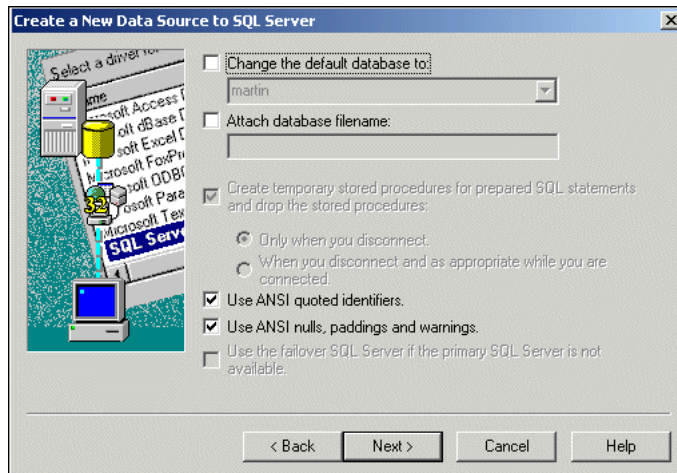


FIGURE 5. Create a New Data Source to SQL Server Window: Further Information 1

15. Click **Next >**.
16. On the next window, you should be able to leave the defaults unchanged:

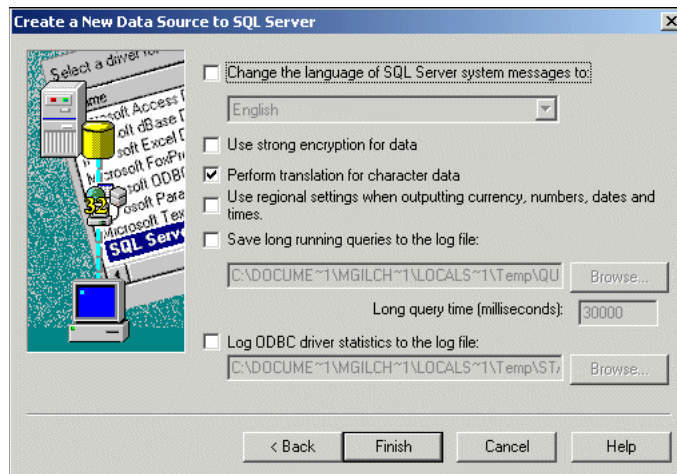


FIGURE 6. Create a New Data Source to SQL Server Window: Further Information 2

17. Click **Finish**.
18. In the confirmation window, review the information for the new data source.

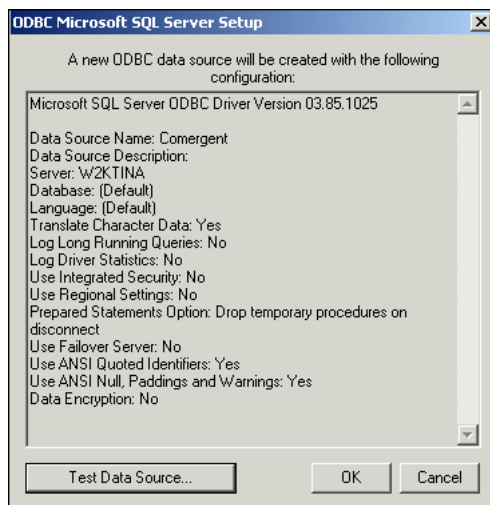


FIGURE 7. ODBC Microsoft SQL Server Setup Window

19. Click **OK**.
20. You should see the new data source listed under the System DSN tab of the ODBC Data Source Administrator window.

C3 Analyzer

There is a known issue with the use of non-ASCII characters and their display in **C3 Analyzer** reports. Consequently, if you plan to use SQL Server for the Knowledgebase and support multiple locales, then contact your Comergent Technologies representative for further information.

Oracle

The following releases of Oracle are supported:

- Oracle 9i: note that if you use Oracle 9i, then you must use the Oracle 9i JDBC driver.
- Oracle 10g: note that if you use Oracle 10g, then you must use the Oracle 10g JDBC driver.

If you do not have a local installation of Oracle products on the installation machine, then you can download the appropriate JAR file from the Oracle Technology Network Web site. The URL is:

<http://otn.oracle.com/index.html>

When setting up the database, select the Custom option in the Database Configuration Assistant in order to set the character set to UTF-8. You can verify that the correct settings are set by invoking a SQL*PLUS session to the database server and entering:

```
SELECT * FROM NLS_DATABASE_PARAMETERS WHERE PARAMETER =  
'NLS_CHARACTERSET';
```

You should see:

```
NLS_CHARACTERSET UTF8
```

Windows 2000

If you plan to use the Oracle OCI driver to connect from the Comergent eBusiness System to the database server, then you must set the following registry key to AMERICAN_AMERICA.UTF8:

```
HKEY_LOCAL_MACHINE -> SOFTWARE -> ORACLE -> HOME0 ->  
NLS_LANG
```

UNIX

If you plan to use the Oracle OCI driver to connect from the Comergent eBusiness System to the database server, then you must set the following environment variable:

```
NLS_LANG=AMERICAN_AMERICA.UTF8
```

Sizing Requirements

The Comergent eBusiness System provides a sizing tool to help select hardware and software that will best meet your implementation needs. This is the *Comergent System Capacity Planning Guide* provided with the SDK.

Third-Party Software Requirements for Applications

Some of the Comergent eBusiness System applications require third-party software. This section reviews requirements associated with these applications.

C3 Analyzer Requirements

If you plan to implement the **C3** Analyzer as part of your Comergent eBusiness System, then you must verify that the machine(s) on which you plan to install the Actuate software components meet Actuate requirements. Consult the accompanying Actuate documentation for further information.

Note that this release of the Comergent eBusiness System uses the Actuate Release 7 family of software components. Earlier releases of the Comergent eBusiness System used Actuate Release 5 or Release 6 software. The supported Actuate software configuration for the Comergent eBusiness System is to install all the Actuate server components on a single machine. Please consult your Comergent representative if you plan to implement a more complex configuration.

C3 Content Manager

C3 Content Manager uses the DocuShare document management system available from Xerox. If you plan to implement the **C3** Content Manager as part of your Comergent eBusiness System, then you must verify that the machine(s) on which you plan to install the DocuShare software components meet the DocuShare requirements. Consult the accompanying DocuShare documentation for further information.

Note that this release of the Comergent eBusiness System uses the DocuShare Release 4.0. Earlier releases of the Comergent eBusiness System used DocuShare Release 3.0 software.

Installing the Comergent eBusiness System

The next two chapters provide a step-by-step guide to installing the Comergent eBusiness System and to deploying either our reference implementation or the minimal implementation. These chapters do not cover any of the customization work that you must perform to meet the needs of your implementation. This process is covered in CHAPTER 8, "Customizing your Comergent eBusiness System".

Most implementations of the Comergent eBusiness System will use the SDK to perform installation, and you must use the SDK to manage your customizations to the Comergent eBusiness System. However, for Release 7.0.2, it is possible to install our reference Web application without using the SDK: this is useful for initial sanity testing and to verify the proposed deployment environment. See "Installing the Reference Comergent eBusiness System" on page 61.

Note that you can install Release 7.0.2 as either a full install or by upgrading from Release 7.0.1.

Attention: The Comergent eBusiness System is a complex product. Follow these instructions carefully.

Installation Overview

Installing the Comergent eBusiness System involves these stages:

- Preparing to Install
- Installing the Software Development Kit
- Installing the Comergent eBusiness System: follow either
 - "To Install the Comergent eBusiness System as a Full Release" on page 37
 - "To Install the Comergent eBusiness System by Upgrading from an Earlier Release" on page 42
- Deploying the Comergent Web Application
- Database Server Steps

Once you have completed these stages, you are ready to go onto the next chapter: CHAPTER 6, "Creating and Populating the Knowledgebase".

This chapter also covers the following topics:

- Managing Database Connections
- Pagination Settings
- Setting the Product Catalog Root
- Setting the Session Timeout
- Modifying the URL for the Web application DTD
- Managing Memory
- High Availability and Clustering
- Sharing Directories
- Directory and File Organization
- Setting Up Apache as a Front-end to Tomcat
- Filtering Static Content
- Compressing Output From the Comergent eBusiness System
- Setting up a Partner Enterprise Server

Preparing to Install

This stage covers how to prepare for an efficient installation: identifying known issues, identifying the database information you will need, identifying the servlet container root directory and the destination directory for the **Comergent.war** file, and so on. See "Preparing to Install" on page 33.

Installing the Software Development Kit

Use the Comergent eBusiness System Software Development Kit (SDK) to install the Comergent eBusiness System. The first stage of installing the Comergent eBusiness System is to install the Software Development Kit. Once this is done, you can manage the installation of the Comergent eBusiness System using targets provided by the Software Development Kit. See "Installing the Software Development Kit" on page 36.

Installing the Comergent eBusiness System

In this stage, you use the SDK to install the Comergent eBusiness System Web application. The result of this stage is the installation of the **Comergent.war** file in the destination directory. See "Installing the Comergent eBusiness System" on page 37.

Deploying the Comergent Web Application

In this stage, you deploy the **Comergent.war** file as a Web application. This depends on which servlet container you are using. See "Deploying the Comergent Web Application" on page 51.

Database Server Steps

In this stage, you perform some preliminary configuration steps in preparation for the steps covered in CHAPTER 6, "Creating and Populating the Knowledgebase". The preparation steps require some knowledge of the database server that you plan to use for the Knowledgebase. See "Database Server Steps" on page 67.

Setting up a Partner Enterprise Server

This optional stage covers setting up a partner enterprise server to test the exchange of pricing and availability and shopping cart transfer messages.

Preparing to Install

1. Determine whether you are performing a full install of Release 7.0.2 or upgrading from Release 7.0.1.
2. Read the **Readme.txt** file supplied on the Comergent eBusiness System CD-ROM for any final instructions not included in this guide.
3. Determine that your servlet container supports the Java Servlet Specification 2.3.

4. Determine the database connection information used to connect the Comergent eBusiness System to the Knowledgebase database server:
 - a. For an Oracle database server, you must set up a TNS alias to access the database from the SDK machine.
 - b. For a SQL Server database server, you must set up an ODBC source to access the database from the SDK machine. The name of the ODBC source must be the same as the name of the machine on which the SQL Server instance is running. See "To Set Up SQL Server as an ODBC Source" on page 23 for detailed steps on setting up an ODBC data source.
 - c. For DB2 database server, you must set up a DB2 alias to access the database from the SDK machine.
5. Identify any known issues. See "Known Issues" on page 35.
6. Identify the location of the servlet container root directory, *container_home*.
In a typical installation on Windows 2003, the location is as follows:

TABLE 5. Servlet Container Homes on Windows

Servlet Container	Home Location
WebSphere	C:\WebSphere\AppServer\
Tomcat	C:\Program Files\Apache Software Foundation\Tomcat 5.5
WebLogic	C:\bea81\

In a typical installation on UNIX, the location is as follows:

TABLE 6. Servlet Container Homes on UNIX

Servlet Container	Home Location
WebSphere	/usr/WebSphere/AppServer/
Tomcat	/usr/local/tomcat/
WebLogic	/apps/bea81SP5/

7. Identify the destination directory location, *debs_home*, of the Comergent eBusiness System. This is usually a sub-directory of *container_home*, but its precise location can vary from one servlet container to another.

In a typical installation on Windows 2003, the location is as follows:

Tomcat	C:\Program Files\Apache Software Foundation\Tomcat 5.5\webapps\
WebSphere	C:\WebSphere\AppServer\hosts\default_host\
WebLogic	C:\bea81\user_projects\domains\mydomain\applications\

8. Remove any existing deployment of the Comergent eBusiness System Web application from the *debs_home* directory before starting the installation procedure. This requires using the servlet container's administrative console to remove the Web application, and then physically deleting the directories and files.
9. If you plan to implement **C3** Configurator, then you must create an environment variable to specify the location of your JDK. For Windows systems, at the command line, enter:

```
set JDK_HOME=<path_to_JDK>
```

For example:

```
set JDK_HOME=c:\jdk1.4.2_08
```

For UNIX systems, enter:

```
setenv JDK_HOME <path_to_jdk>
```

For example:

```
setenv JDK_HOME /usr/java/jdk1.4.2_08
```

Bear in mind that this setting is on the servlet container machine. In using the SDK, you will also set a *JAVA_HOME* environment variable on the machine used to run the SDK. If you use the same machine for both functions, then *JAVA_HOME* and *JDK_HOME* must have the same value.

Check also that the *PATH* environment variable includes the *JDK_HOME/bin/* directory.

Known Issues

Internationalization

There are known issues relating to Netscape Navigator and internationalized content. Refer to the following URL for further information:

<http://home.netscape.com/eng/intl/basics.html>

Installing the Software Development Kit

In Release 7.0.2, you can use the Software Development Kit to install the Comergent eBusiness System as follows:

Attention: You must use JDK 1.4.2 and Version 3.0 of the SDK to install the Comergent eBusiness System.
--

1. To install the SDK, identify or create a directory on your machine to use as the development directory: we refer to this as ***sdk_home***.
2. If it is not already set, you must set the JAVA_HOME environment variable to point to the location of your Java Development Kit. For example:

```
set JAVA_HOME=<path_to_JDK>
```

For example:

```
set JAVA_HOME=c:\jdk1.4.2_08
```

For UNIX systems, enter:

```
setenv JAVA_HOME <path_to_jdk>
```

For example:

```
setenv JAVA_HOME /usr/java/jdk1.4.2_08
```

For the Bourne shell, enter:

```
export JAVA_HOME=<path_to_jdk>
```

For example:

```
export JAVA_HOME=/usr/java/jdk1.4.2_08
```

3. Version 3.0 of the SDK is delivered in the form of a JAR file, ***sdk-framework.jar***. Simply unjar the JAR file in the ***sdk_home*** directory.
4. At the command line, navigate to the ***sdk_home*** directory, and enter:

```
sdk setup
```

5. If you are running the SDK on a Windows machine and your system directory is not ***c:/winnt/system32***, then edit the ***sdk_home/my_sdk.properties*** file to update the property that currently reads:

```
windows.system.dir=c:/winnt/system32
```

6. After you have installed Release 7.0.2, then run the following target to set the version number on the SDK Index HTML page:

```
sdk generateIndexFile
```

The *Comergent eBusiness System Developer Guide* provides a comprehensive guide to using the SDK. This chapter covers only those SDK functions used to install the Comergent eBusiness System. Proceed to "Installing the Comergent eBusiness System" on page 37.

Installing the Comergent eBusiness System

Attention: You must have installed your servlet container before attempting to install the Comergent eBusiness System.

This section describes the procedure for installing the Comergent eBusiness System on either a Windows 2000/2003 or a UNIX operating system. When you have completed the installation steps, the **Comergent.war** file is created on your Software Development Kit machine. Follow the steps described one of these two tasks:

- "To Install the Comergent eBusiness System as a Full Release" on page 37
- "To Install the Comergent eBusiness System by Upgrading from an Earlier Release" on page 42

Attention: If your release number is not Release 7.0.2 (for example, it is Release 7.0.2.2), then substitute the string for the release (for example, "7.0.2.2") wherever these instructions refer to "7.0.2".

To Install the Comergent eBusiness System as a Full Release

You must perform this task as a user with local machine administration privileges.

1. Locate the release **Comergent.jar** file for this release (called something like **Comergent-def-7.0.2-RCx.jar**) and copy it to a temporary location on your system.
2. Locate the content JAR file, **doc-7.0.2-RCx.jar**, and copy it to a temporary location on your system. This file contains the HTML pages for the Javadoc and SDK index.
3. At the command line, navigate to the **sdk_home/** directory.
4. Edit the **sdk_home/my_sdk.properties** file to specify the value of the **container.home** and **app.name** properties. The SDK uses these properties to determine the values of other properties as follows:

- `deploy.home` is set to `container.home/apps.dir`. The `deploy.home` property is used to specify the servlet container deployment directory.
- The `app.name` is the name of the Web application. Typically, this is the same as the Web application's directory under the deployment directory. In this guide, we assume that the value of this property is "Comergent". If you want to change the name of the Web application (for example, if you want to change the name of the generated WAR file), then change it in your **my_sdk.properties** file.
- `debs.home` takes the value `container.home/apps.dir/app.name`.

Note that the `project.name` property defined in the **sdk-settings.properties** file is used to specify the name of the project directory in the SDK. In general, this is *not* the same as the `app.name`.

<p>Note: If you are running the SDK on UNIX, then you may have to modify the permissions on the sdk_home/sdk.sh file. Use <code>chmod +x</code> for this purpose.</p> <p>After you have run the merge target, you may have to modify the permissions on the sdk_home/builds/project/OracleCreateSchema.sh file.</p>
--

5. Run the `install` target twice, specifying the location of the **Comergent.jar** file set in Step 1, and the location of the content JAR file set in Step 2 on Page 37. For example:

```
sdk install /tmp/Comergent-7.0.2-def-RC-4.jar
sdk install /tmp/doc-7.0.2-def-RC-4.jar
```

Note that you can use quotes if the paths to the files have spaces in them. These targets can take a few minutes to run.

6. Run the `newproject` target, specifying a project name for this installation. For example:

```
sdk newproject matrix
```

This target can take a few minutes to run.

7. Database targets:
 - a. If you are planning to run the Knowledgebase on Oracle, then run the `installOracle` target, specifying the location of the Oracle JDBC JAR file, to copy the Oracle JDBC drivers JAR file to the project files. The name and location of the JAR file will vary from installation to installation: typical locations are **C:\oracle\ora90\jdbc\lib\classes12.zip** or **/opt/oracle/product/8.1.6/jdbc/lib/classes12.zip**. For example:

```
sdk installOracle /tmp/Oracle_jdbc.jar
```

This target copies the JAR file to the **WEB-INF/lib/** directory in the release directory. It also renames the file to **oraclejdbc.jar**.

- b. If you are planning to run the Knowledgebase on SQL Server 2000, then run the installODBC target. For example:

```
sdk installODBC
```

This copies the **Cmgt7OdbcJNI.dll** file to your **system32/** directory, and it comments out the JDBC Driver elements from the **DataServices.xml** file. Note that the precise location of this directory is controlled by the windows.system.dir property defined in the **my_sdk.properties** configuration file in your **sdk_home** directory. You may need to edit this value before running this target: you must use either forward slashes or two back slashes. For example:

```
windows.system.dir=c:/winnt/system32
```

or

```
windows.system.dir=c:\\winnt\\system32
```

- c. If you are planning to run the Knowledgebase on SQL Server 2005, then run the installMSSQLJDBC target, specifying the location of the SQL Server JDBC JAR file. For example:

```
sdk installMSSQLJDBC "C:\Program Files\Microsoft SQL Server 2005 JDBC Driver\sqljdbc_1.0\enu\sqljdbc.jar"
```

- d. If you are planning to run the Knowledgebase on DB2, then run the installDB2 target, specifying the location of the DB2 JDBC JAR file, to copy the DB2 JDBC drivers JAR file to the project files. For example:

```
sdk installDB2 /tmp/db2java.zip
```

The name and location of the JAR file will vary from installation to installation: typical locations are

C:\Program Files\IBM\SQLLIB\java\db2jcc.jar or **\$DB2_HOME/java/db2jcc.jar**. This target copies the JAR file to the **WEB-INF/lib/** directory in the release directory. It also renames the file to **db2jdbc.jar**.

8. Run the env.setDBType target to set the appropriate database type:

```
sdk env.setDBType Oracle
```

or

```
sdk env.setDBType ODBC
```

or

```
sdk env.setDBType MSSQLJDBC
```

or

```
sdk env.setDBType DB2
```

9. Once the newproject target is run, new properties files are created for the new project in the ***sdk_home/projects/project/*** directory. Note that the values of properties (such as container.home) set in these properties file override the values set in the ***local-sdk.properties*** and ***my_sdk.properties*** files. By default, this file is ***project_dev.properties***. See "Project Property File Settings" on page 48 for details of the appropriate values for your system.

Edit the project properties files to set the database connection information. You can also set other properties such as the logging level. Values you set here are automatically merged into the ***prefs.xml*** configuration files under the ***sdk_home/builds/project/*** directory. See "Email Addresses" on page 49 for information about the email addresses set in the properties files.

Attention: On HP-UX systems, you must add a file called ***.hotspot_compiler*** to the ***sdk_home/projects/project/*** directory. This file must contain the following two lines:

```
exclude oracle/sql/NUMBER _isPositive
exclude com/comergent/dcm/dataservices/
DsSchemaLoader loadDataObject
```

Note that the space between the second and third strings on each line is a tab character.

10. If you want to set the database password to be encrypted, then do these steps:

- a. Set the Encrypted flag to true:

```
sdk setVal DataServices.DataSource.ENTERPRISE.Encrypted true
```

- b. Encrypt the database password string:

```
sdk encryptVal <password>
```

The result is an encrypted version of the password.

- c. Edit the encrypted password string into the appropriate properties file as the relevant password property. For example:

ORACLE_PASSWORD=<encrypted_password>

Note that this will mean that the encrypted form of the password is entered into the schema creations cripts that are used by the createDB target. If you want to run the createDB target from the SDK, then you must run it before encrypting the password as described here.

11. Run the merge target to create your first build in the **builds/** directory.

```
sdk merge
```

This target can take a few minutes to run. It is copying over the Web application files from the releases directory and merging in the files and properties currently in your project directory. If the target fails with a message relating to the JDBC driver, then check that you have run installOracle or installDB2 as appropriate and that the **oraclejdbc.jar** or **db2jdbc.jar** file is now in the *sdk_home/releases/debs-7.0.2/WEB-INF/lib/* directory. If you are creating a SQL Server-based project, then check that you have run the installODBC target, and that the *sdk_home/projects/project/templates/WEB-INF/properties/DataServices.xml* file has all the JdbcDriver elements commented out.

12. Run the distWar target to create the **Comergent.war** file that you will deploy. The WAR file created is named to reflect the date of creation and the value of the deploy.environment property. You can rename it to **Comergent.war** if you wish. For example:

```
sdk distWar
```

This target can take a few minutes to run. The generated WAR file is in *sdk_home/dist/*. Its name is determined by the app.name and deploy.environment properties and a timestamp.

13. Alternatively, you can run the dist target. This creates a JAR file that contains the WAR file along with JAR files that provide the SQL scripts and XML data files. You can install the Comergent eBusiness System from this JAR file by following the instruction provided in "Installing the Reference Comergent eBusiness System" on page 61. Note that you can skip the steps to set the database properties information because your **prefs.xml** file already has this information.
14. In the *sdk_home/dist/time_stamp/* directory, rename the generated **prefs_env.xml** file to **prefs.xml** file. This is the basic configuration file that must be copied under the home directory of the user running the servlet container.
15. Run the createDB target to create the Knowledgebase schema.

- a. If you are running the Knowledgebase on either Oracle or SQL Server, then simply run:

```
sdk createDB
```

If you are running the Knowledgebase on SQL Server 2005 and want to use the JDBC connection to connect to it at runtime, then you must still use the ODBC scripts to create the database schema. Consequently, you must set the ODBC properties as well as the MSSQLJDBC properties before running this target.

- b. If you are running the SDK on a Windows machine and using DB2 as the Knowledgebase database server, then before running this target, check that you can connect to the DB2 database by running:

```
db2 connect to <database> user <username> using <password>
```

Use the values that you have specified in the SDK properties file.

Before running createDB, enter db2cmd. This opens a DB2 CLP

window, and then run the createDB target from this window. Once you have run the createDB target, then exit the DB2 CLP window.

16. Run either the loadDB target (to load the minimal data set) or the loadMatrixDB target (to load the full Matrix reference data set) into the Knowledgebase.

```
sdk loadDB
```

or

```
sdk loadMatrixDB
```

If you run this target against DB2, then you may see an error relating to the licensing of the DB2 driver. If you do, copy over the license JAR files from your DB2 installation (**db2jcc_license_cisuz.jar** and **db2jcc_license_cu.jar**) to the *sdk_home/builds/project/WEB-INF/lib/* directory, and rerun the data loading target.

Now you must deploy the Web application into the servlet container. Follow the steps for your servlet container provided in "Deploying the Comergent Web Application" on page 51.

To Install the Comergent eBusiness System by Upgrading from an Earlier Release

Before you start the upgrade process, bear in mind that part of the upgrade process is to upgrade your Knowledgebase database schema. This is an "in place" upgrade so be sure to back up your current database before starting, and make sure that you

can restore the backup database if required. You should also read "Encrypted Data" on page 47 for a description of how to deal with fields that store encrypted data.

These instructions can be followed for any of the supported upgrade paths as listed below. They are written for the upgrade from Release 6.7, but you should adjust the strings used to identify the source release as appropriate:

- Release 7.0.1

You must perform this task as a user with local machine administration privileges.

1. Locate the **Comergent.war** file for this release and copy it to a temporary location on your system.
2. Locate the content JAR file, **doc-7.0.2-RCx.jar**, and copy it to a temporary location on your system.
3. At the command line, navigate to your *sdk_home/* directory.
4. Run the install target twice, specifying the location of the **Comergent.war** file set in Step 1, and the location of the content JAR file set in Step 2 on Page 37. For example:

```
sdk install /tmp/Comergent.war
sdk install /tmp/doc-7.0.2-RCx.jar
```

Note that you can use quotes if the paths to the files have spaces in them. These targets can take a few minutes to run.

5. Run the switchdebs target:
6. If you want to upgrade an existing Release 7.0.1 project, then go to Step 7 on Page 44. If you want to create a new Release 7.0.2 project, then follow the following steps:

```
sdk switchdebs debs-7.0.2
```

- a. Run the newproject target, specifying a project name for this installation. For example:

```
sdk newproject matrix
```

This target can take a few minutes to run.

Edit the project properties files to specify the database type and its connection information. You can also set other properties such as the logging level. Values you set here are automatically merged into the properties files under the *sdk_home/builds/project/* directory. See "Email Addresses" on page 49 for information about the email addresses set in the properties files.

- b. If you plan to run the Comergent eBusiness System Knowledgebase on an Oracle database, then run the installOracle target to copy the Oracle JDBC drivers to the project:

```
sdk installOracle /tmp/Oracle_jdbc.jar
```

If you plan to run the Comergent eBusiness System Knowledgebase on a SQL Server database, then run the installODBC target:

```
sdk installODBC
```

If you plan to run the Comergent eBusiness System Knowledgebase on a DB2 database, then run the installDB2 target:

```
sdk installDB2 /tmp/db2java.zip
```

- c. Run the merge target to create your first build in the **builds/** directory.

```
sdk merge
```

This target can take a few minutes to run. It is copying over the Web application files from the releases directory and merging in the files and properties currently in your project directory. If the target fails with a message relating to the Oracle JDBC driver, then check that you have run installOracle and that the **oraclejdbc.jar** file is now in the **sdk_home/releases/debs-7.0.2/WEB-INF/lib/** directory.

- d. Run the dist target to create the **Comergent.war** file that you will deploy. The WAR file created is named to reflect the date of creation and the value of the deploy.environment property. You can rename it to **Comergent.war** if you wish. For example:

```
sdk dist
```

This target can take a few minutes to run. The generated WAR file is in **sdk_home/dist/**. Its name is determined by the app.name and deploy.environment properties and a timestamp. Once this is done, then proceed to Step 8 on Page 47.

- 7. To upgrade an existing Release 7.0.1 project, follow these steps:

- a. Switch to the existing project:

```
sdk switchproject <Name of project>
```

- b. If you have previously run merge on your project using Release 7.0.1, then delete the generated bean source Java files from the **sdk_home/tmp/project/src/com/comergent/bean/simple/** directory:

- c. Enter:

```
sdk touchproject
```

- d. If you are comfortable performing manual merges between the Release 7.0.2 files and your project, then skip to Step f on Page 45.
- e. If you want to perform automated merges, then you should install your three-way diff tool. You can download the diff3 tool from <http://www.gnu.org> or use a commercially available tool such as SiberMerge. The diff3 tool requires an environment such as Cygwin to be built, but current versions of Cygwin come with a usable version of diff3. Edit the **my_sdk.properties** file to specify the three-way diff tool as the **mergetool.name** property. In the corresponding **sdk_home/plugins/mergetools/** sub-directory, edit the **handler.xml** file to specify the executable that must be run to execute the merge. Make sure that this executable can be found on the path of the machine. See the SDK documentation for more information on setting up your three-way diff tool.
- f. Enter:

```
sdk project.premigrate debs-7.0.2
```

Examine the following generated log files in the **sdk_home/projects/project/** directory:

- **conflictingfiles.log**: this file lists all the files that for some reason have been identified as needing manual attention as part of your upgrade. These files will not be merged when you run the **project.migratefiles** target.
- **filestobeupgraded.log**: this file lists all the files that have changed in both your project and in the upgrade from Release 7.0.1 to Release 7.0.2. You must manually edit these files to merge changes from your project into your customization of Release 7.0.2 or perform the step below. Unless you know that you have made changes to the **DataSources.xml** files, the schema creation scripts (**.bat** and **.sh** files), or the database-specific data object files (**ConfigVersionLookup.xml**, **ItemsRefLookup.xml**, and **ModelSubGroup.xml**), then you can safely ignore these files.
- **filestobedeleted.log**: if it exists, this file lists all the files that were deleted between Release 7.0.1 and Release 7.0.2, but which are also customized in your project. This file is not generated if no files were deleted between Release 7.0.1 and Release 7.0.2. You must examine how these files are used in your project and manually resolve how they will need to be re-implemented for Release 7.0.2.

- g. The old project ***.properties** files are saved as ***.properties.bak**. You must edit the new ***.properties** files so that the relevant values (such as database connection information are transferred to the new files).
- h. You have two options for merging your project files with Release 7.0.2.
 - *Either*, if you have installed a three-way diff tool, then to perform an automated merge of your project files, enter:

```
sdk project.migratefiles
```

This merges changes from the project and Release 7.0.2 files, resolving conflicts between merged files as it runs.

- *Or*, Manually merge the files by comparing the changes made in the project and Release 7.0.2 copies of the files.
- i. Run the appropriate install target for your database server: either installDB2, installODBC, or installOracle.
- j. Run the env.setDBType target for your database server:

```
sdk env.setDBType <db_type>
```

- If you are upgrading your project from Release 6.7, then you should modify your JSP and JSPF pages to change usages of cic tags to cic67 tags.

Once you have performed any necessary modifications to your project files, then run the merge and dist targets to re-create the WAR file for your deployment as follows.

- l. Enter:

```
sdk merge -clean
```

- m. Enter:

```
sdk distWar
```

This completes the upgrade of the Web application from Release 7.0.1 to Release 7.0.2. Now you must upgrade the database schema and data to Release 7.0.2.

Attention: Before commencing a database migration, back up your current database, and make sure that you can recover the database from the backup. The following steps are not reversible.

- n. Enter:

```
sdk migrateDB DEBS_7_0_1_to_DEBS_7_0_2
```

Check the log file ***sdk_home/workspaces/project/WEB-INF/sql/db_type/migration/DEBS_7_0_1_to_DEBS_7_0_2/mig_db_type.log*** for errors. If the migration has been successful, then you migrate the data.

- o. Enter:

```
sdk addMigrateData DEBS_7_0_1_to_DEBS_7_0_2
```

Check the log file ***sdk_home/workspaces/project/debs.log*** for errors.

You must install the Web application into the servlet container as described in Step 8 on Page 47. Once this is done, you can perform the deployment steps described in the next section for each servlet container.

8. Manually install the **Comergent.war** file using the servlet container-specific means for doing this. Once you have successfully installed the Comergent eBusiness System, you can continue with the implementation by following the steps in "Deploying the Comergent Web Application" on page 51.

Encrypted Data

This section described how to manage encrypted data during the upgrade process. Some fields in your source Knowledgebase database are encrypted, and in Release 7.0.1 and higher some new fields are encrypted that were previously not encrypted. There are two scenarios to manage:

- A field is encrypted in your implementation. If the field is marked as unencrypted in Release 7.0.1 and higher, then you must ensure that your **DsDataElements.xml** configuration file continues to mark the field as encrypted. After you have run the data migration scripts as described above, you should make sure that your encryption scheme is declared in the **CryptograpyServices.xml** configuration file.
- A field is unencrypted in your implementation, but the field is now encrypted in Release 7.0.1 and higher. After you have run the data migration scripts as described above, you must decided what to do about this field:
 - We suggest that you mark the field as encrypted. If you leave the unencrypted values in place, then when data objects that reference the field are restored, a null value will be set in this field. If a new value is set in this field, then this will be encrypted when the data object is persisted. Contact Comergent Technologies for help with encrypting the current values: a standalone tool can be provided for this purpose.

- If you choose to leave the field unencrypted, then you must ensure that your **DsDataElements.xml** configuration file continues to mark the field as unencrypted.

The following field was previously unencrypted, but is encrypted in Release 7.0.1 and higher:

- UserContact.PaymentNumber

Project Property File Settings

Before running the merge target, you must ensure that you have set the values of the database connection properties in your *project_env.properties* file correctly. This section provides a brief description of these.

Oracle

The Oracle section of the properties file looks like this:

```
ORACLE_URL=jdbc:oracle:thin:@<machine>:<port>:<sid>
ORACLE_USERNAME=<username>
ORACLE_PASSWORD=<password>
ORACLE_DATABASE=<tnsalias>
```

The ORACLE_URL property is used to populate the ConnectionString attribute of the DataSource element set in the **prefs.xml** file. The ORACLE_DATABASE property should be set to the TNS alias of the Oracle server as seen from the SDK machine. It is used in the schema creation scripts, but is not used in the running system.

SQL Server 2000

In Release 6.4 and higher, access to a SQL Server 2000 database server is through an ODBC source. The ODBC section of the properties file looks like this:

```
ODBC_URL=<ODBC source>
ODBC_USERNAME=<username>
ODBC_PASSWORD=<password>
ODBC_DATABASE=<database>
ODBC_ODBCDSN=<Not used in this release>
```

The ODBC_URL property is used to populate the ConnectionString attribute of the DataSource element set in the **prefs.xml** file. It is also used to set the svr variable in the **ODBCCreateSchema.bat** script used to create the schema.

ODBC_USERNAME, ODBC_PASSWORD, ODBC_DATABASE are used to populate values in the **ODBCCreateSchema.bat** script and the **ODBCDataSources.xml** file.

SQL Server 2005

In Release 7.0.2 and higher, access to a SQL Server 2005 database server is supported through a JDBC driver. The MSSQLJDBC section of the properties file looks like this:

```
# Tokenized files
MSSQLJDBC_URL=jdbc:jdbc:sqlserver://dbname
MSSQLJDBC_USERNAME=username
MSSQLJDBC_PASSWORD=password
MSSQLJDBC_DATABASE=dbname
```

The MSSQLJDBC_URL property is used to populate the `ConnectionString` attribute of the `DataSource` element set in the **prefs.xml** file. The MSSQLJDBC_USERNAME, MSSQLJDBC_PASSWORD, MSSQLJDBC_DATABASE properties are used to populate values in the **prefs.xml** file. In Release 7.0.2, you must also set the ODBC properties: these are used to set the connection variables in the **ODBCCreateSchema.bat** script used to create the schema.

DB2

The DB2 section of the properties file looks like this:

```
DB2_URL=jdbc:db2:<database>
DB2_ODBCDSN=<db2alias>
DB2_DATABASE=<database>
DB2_USERNAME=<username>
DB2_PASSWORD=<password>
```

The DB2_URL property is used to populate the `ConnectionString` attribute of the `DataSource` element set in the **prefs.xml** file. For example:

```
DB2_URL=jdbc:db2://<system>:50000/<database>
```

The DB2_ODBCDSN property should be set to the DB2 alias used in the DB2 command window to connect to the DB2 server from the SDK machine. The DB2_DATABASE property should be set to the DB2 alias of the DB2 server as seen from the SDK machine.

Email Addresses

As part of implementing the Comergent System, take care to set up the correct email addresses used by the system. They come in two flavors:

Configuration Files

Some email addresses are set in the configuration files. They are used by applications when sending email from the system. Typically, you set appropriate

values for these addresses in the ***.properties** files used by your SDK. When the SDK merge target is run, these values are merged into the configuration files. The following email addresses must be set:

- SMTP_RECIPIENT: no longer used.
- SMTP_SENDER: used as the From address when email is sent from the Comergent System.
- INVOICE_EMAIL_ADDRESS: the email address of an enterprise user to whom emails are sent relating to invoices. The user must have the AccountReceivable role.
- RFQ_EMAIL_ADDRESS: the email address of an enterprise user to whom emails are sent relating to RFQs: the user must have the CustomerServiceRepresentative role.
- ENTERPRISE_EMAIL_ADDRESS: set to the same value as SMTP_SENDER.

Minimal Data

When you load the minimal data, you create some partners and some users. The email addresses associated with these are currently set to changeme@changeme.com. You should change these values to more suitable values before loading the data.

The Partner Profile email addresses for the Enterprise, AnonymousUserPartner, and RegisteredUserPartner should all be set to a system administrator email account.

The email addresses for the users (admin, ERPAdmin, and AnonymousUser) should be set to the email address of a system administrator at your implementation. They can be changed through the Comergent System user interface.

ObjectMap Settings

If you are running **C3** Configurator and must use the external form of the Java compiler (for example if you are running Tomcat 5.5.x on Windows), then you must specify that the Comergent eBusiness System uses the external rule compiler. You do this by editing the **WEB-INF/properties/ObjectMap.xml** configuration file to change:

```
<Object ID="com.comergent.apps.configurator.util.ConfigCompiler">
  <ClassName>
    com.comergent.apps.configurator.util.InMemoryRuleCompiler
  </ClassName>
</Object>
```

to:

```
<Object ID="com.comergerent.apps.configurator.util.ConfigCompiler">
  <ClassName>
    com.comergerent.apps.configurator.util.RuleCompiler
  </ClassName>
</Object>
```

We recommend using the external form of the compiler for production systems. To use the internal compiler (that is, the `com.sun.tools.javac.Main` class), copy the **tools.jar** file from your JDK to the appropriate **lib/** directory in your servlet container deployment. For example, in a typical Tomcat 5.5.9 deployment, you can copy **tools.jar** to your *tomcat_home/shared/lib/* directory.

Deploying the Comergerent Web Application

Once you have successfully installed the **Comergerent.war** file, you must deploy it as a Web application. This process varies from one servlet container to another. Check your servlet container documentation for further details. This section provides the specific deployment steps for each of the supported servlet containers.

All the deployments described below require that you identify the operating-system user that is running the servlet container. You must copy the **prefs.xml** configuration file created in Step 12 on Page 41 to a sub-directory of the home directory of this user. The sub-directory is called *user_home/cmgt/debs/conf/*.

The *user_home* home directory location can vary from one operating system to another. The following table provides some typical locations.

TABLE 7. Operating System Home Directories

Operating System	Standard Home Directory
Windows 2003	C:\Documents and Settings\username
Solaris 9.0	/export/home/username
Linux 2.6	/home/username

Note that you can put this file in an alternate location which is specified as the `comergerent.preferences.store` system property. If you do so, then you must specify its location so that it can be read when the servlet container starts the Comergerent eBusiness System Web application. You can do this in the following ways:

- Set its location as a system variable. For example, add the following to the command that starts the servlet container:

```
-Dcomergerent.preferences.store=/home/scowner/jrun/prefs.xml
```

- Set its location in the **WEB-INF/web.xml** using the following element:

```
<init-param>
  <param-name>comergent.preferences.store</param-name>
  <!--BEGIN:com.comergent.tools.ant.taskdefs.SetFileContents
    (do not modify this tag) -->
  <param-value>/home/scowner/jrun/prefs.xml</param-value>
  <!--END:com.comergent.tools.ant.taskdefs.SetFileContents
    (do not modify this tag) -->
  <description>Location of Comegent's preferences store
</description>
</init-param>
```

We provide deployment steps for the following servlet containers:

- "To Deploy the Comergent Web Application on Apache Tomcat" on page 53
- "To Deploy the Comergent Web Application on IBM WebSphere" on page 54
- "To Deploy the Comergent Web Application on WebLogic 8.1" on page 57

XML Parser Settings

To ensure that the correct Java classes are used for the XML processing performed by the Comergent eBusiness System, you must ensure that the Java Virtual Machine settings specify the correct classes. In general, you can either set the classes as additional parameters in the command line that starts the servlet container or you can specify them as parameters for the Web application.

The following sections provides the steps necessary to set the command line parameters for each of the supported servlet containers. To set the parameters for the Web application, add the following to the **web.xml** file to be found in the **debs_home/Comergent/WEB-INF/** directory:

```
<context-param>
  <param-name>Comergent.xml.SAXParserFactory</param-name>
  <param-value>
    org.apache.xerces.jaxp.SAXParserFactoryImpl
  </param-value>
  <description>SAX Parser factory configuration</description>
</context-param>
<context-param>
  <param-name>Comergent.xml.DocumentBuilderFactory</param-name>
  <param-value>
    org.apache.xerces.jaxp.DocumentBuilderFactoryImpl
  </param-value>
```

```
<description>DOM Parser factory configuration</description>
</context-param>
```

Note that these settings are overridden by values set at the command line.

Tomcat Releases

To Deploy the Comergent Web Application on Apache Tomcat

If you have installed the **Comergent.war** file into the default Web applications directory, *container_home/webapps/*, then Tomcat can automatically detect it, and it is deployed automatically when you start Tomcat. Make sure that there is no pre-existing **Comergent/** directory already in *container_home/webapps/*.

1. You must make sure that the correct XML parser libraries are used:
 - a. For Tomcat 5.5.17: You must use JDK 1.5.
 - b. For Tomcat 5.5.9: You must apply the compatibility package so that Tomcat can be run using JDK 1.4.2. Essentially, this comprises copying the **jmx.jar** file to *container_home/bin/* and the following parser files to *container_home/common/endorsed/*:
 - **xercesImpl.jar**
 - **xml-apis.jar**
2. On Windows installations of Tomcat, you must use the client version of the Java VM DLL. Open **Start -> All programs -> Apache Tomcat 5.5 -> Configure Tomcat**, and on the Java tab, set the Java Virtual Machine to the location of the client JVM DLL (for example: C:\Program Files\Java\j2re1.4.2_06\bin\client\jvm.dll).
3. Modify the Tomcat startup parameters to set Java parameters as appropriate:

```
set JAVA_OPTS=-Xms256m -Xmx512m -Dcomergent.log.console=true
```

Notes on Using Apache Tomcat

Note that Apache Tomcat does not automatically re-compile JSP pages that are included in other JSP pages: if you make a change to an included JSP page, then remove the corresponding compiled servlet classes from the *container_home/work/* directory to force the JSP page to be re-compiled.

If you use the shutdown command to stop Tomcat gracefully, then persistent session information is saved to a file:

- *container_home/work/Standalone/localhost/Comergent/SESSIONS.ser* on Tomcat 5.5.x

When you restart the servlet container, the servlet container will attempt to reload this session data and throw exceptions. You should remove this file before re-starting the servlet container.

You can force Tomcat to not save session information by setting the `saveOnRestart` attribute of the `Context` element to “false”. To do this within the SDK, modify the **tomcat-context.xml** file to the following:

```
<Context path="/@app.name@" docBase="@project.base@" >
<Manager className="org.apache.catalina.session.PersistentManager"
    debug="0"
    saveOnRestart="false"
    maxActiveSessions="-1"
    minIdleSwap="-1"
    maxIdleSwap="-1"
    maxIdleBackup="-1">
    <Store className="org.apache.catalina.session.FileStore"/>
</Manager>
</Context>
```

If you run the `fastdeploy` target, then this XML file is used to declare the Web application in the *container_home/webapps/* directory.

Certain class files in JAR files are not loaded from *container_home/webapps/Comergent/WEB-INF/lib/*. If you place the JAR files in *container_home/lib/* or *container_home/common/lib/*, then they will be loaded, but note that this may affect the running of other Web applications in the same servlet container.

Continue with the steps described in "Database Server Steps" on page 67.

WebSphere Releases

To Deploy the Comergent Web Application on IBM WebSphere

Follow these steps to deploy the Comergent eBusiness System into your installation of IBM WebSphere Application Server. These steps are written to deploy into WebSphere 5.1. In this section, we refer to **WAS_HOME**: it is the IBM terminology for the *container_home* directory. On a UNIX system, its default location is */usr/WebSphere/AppServer/*. In the WebSphere Administrator's Console, the node on which the servlet container is installed is displayed as the machine name: we refer to this as *<server>*.

Notes:	Start and stop the WebSphere servers using the Administrator's Console. Stopping the server manually can corrupt the configuration data. Do not use the “_” character in WebSphere server names: WebSphere regards URLs with this character as invalid.
---------------	--

1. Log in to administration console at:
`http://<server>:9090/admin`
using the WebSphere administrator account.
2. Browse to **Security->Global Security**, and uncheck the following check boxes:
 - **Enabled** to disable WebSphere security
 - **Enforce Java 2 Security** to disable Java policy security
3. Click **Apply**.
4. Browse to **Applications -> Install New Application**.
5. In the **Preparing for the application installation** panel, check the **Local path** radio button, and click **Browse** to browse to the location of the WAR file. Enter the context name (for example, “Comergent”) for your Web application in the **Context Root** text field, then click **Next**.
6. In the next **Preparing for the application installation**, accept all the default value and click **Next**.
7. In the **Application Security Warning** panel, click **Continue**.
8. In the **Install New Application** panel, **Step 1 Provide options to perform installation**, set these options:
 - a. Change the value of Application Name to your preferred one, for example “Comergent”.
 - a. Click **Next**.
9. In **Step 2: Mapping virtual host for web module**:
 - a. Check the **Comergent Product Suite** check box.
 - b. Select default_host in the Virtual Host drop-down list.
 - c. Click **Next**.
10. In **Step 3: Map modules to application servers**:
 - a. Check **Comergent Product Suite** check box.
 - b. Click **Next**.
11. In **Step 4: Summary**, click **Finish**.

12. When WebSphere completes installing the Comergent eBusiness System Web application, click the **Save to Master Configuration** link.
13. On the next page, click **Save**.
14. When the Web application has successfully deployed, you must update one of the WebSphere JAR files: copy **jh.jar** from **WAS_HOME/installedApps/ server/Comergent.ear/Comergent.war/WEB-INF/lib/** to **WAS_HOME/lib/**. This overwrites an earlier version of **jh.jar** in the **WAS_HOME/lib/** directory.
15. Verify that the Comergent eBusiness System is successfully deployed by pointing your browser to:

`http://<server>:9080/Comergent/en/US/enterpriseMgr/matrix`

Solaris Optional Step

On Solaris installations of WebSphere, the following may help with JSP page compilation problems.

16. If you are running WebSphere using JDK 1.4.2 on Solaris, then create a new text file in **WAS_HOME/bin/** called **.hotspot_compiler** whose contents are:

```
exclude oracle/sql/NUMBER_isPositive
exclude com/comergent/dcm/dataservices/DsSchemaLoader loadDataObject
```

The syntax of each of these lines must be as follows:

```
exclude[space character]<Class name>[tab character]<Method name>
```

In effect, this file instructs the Hotspot compiler not to compile certain methods down to machine code.

17. In addition, add a JVM setting as follows:
 - a. Using the Administrator's Console, navigate to:
WebSphere Administration Domain -> Nodes -> <Machine> -> Application Servers -> Default Server.
 - b. Click the JVM Settings tab.
 - c. Click **Advanced JVM Settings...**, and enter in the Command line arguments field: **-XX:MaxPermSize=128m**
 - d. Click **OK**. Verify that the new argument has been added to the Generated Command Line Arguments field, and click **Apply**.
18. Restart the WebSphere Application Server. Check the log files for:

```
### Excluding compile: com.comergent.dcm.dataservices.DsSchema-
```



```
Loader::loadDataObject.
```

This is the indication that the Java VM has picked the correct settings from **.hotspot_compiler**.

Continue with the steps described in "Database Server Steps" on page 67.

Pre-Compiling JSP Pages

As an optional step, you can pre-compile the JSP pages in the Comergent eBusiness System as follows:

1. At the command line, navigate to ***WAS_HOME/bin/***.
2. Enter:

```
./JspBatchCompiler.sh -enterpriseApp Comergent -webModule "Comergent Product Suite" -verbose true [-nameServerPort <port>]
```

You only need to specify the nameServerPort if your servlet container is listening on a non-standard port.

WebLogic Releases

To Deploy the Comergent Web Application on WebLogic 8.1

Deployment of the Comergent eBusiness System into WebLogic Release 8.1 has been simplified from earlier releases of WebLogic. However, because the Comergent eBusiness System must run as an “expanded” Web application (as opposed to as a WAR file), these instructions ensure that the Web application WAR file is expanded as part of the deployment process.

1. In your WebLogic installation, identify the ***domain_home*** directory that you plan to use for your deployment of the Comergent eBusiness System. By default, its location is ***container_home/user_projects/domains/mydomain/***, but you may have changed the domain name from “mydomain” to something else.
2. Log in to the WebLogic server as the user used to install WebLogic. Copy the **Comergent.war** file produced by the SDK to a temporary location on this machine. Alternatively, you can use the WebLogic Web UI to upload the **Comergent.war** file to the WebLogic machine. If you do this, then the **Comergent.war** file can be found in ***domain_home/myserver/upload/***.
3. If it is running, then stop the WebLogic server.
4. Copy the **Comergent.war** file to ***domain_home/applications/***.

5. Using a text editor, edit the file *domain_home/config.xml* by adding the following element as a child element to the Domain element:

```
<Application Name="Comergent"
Path="container_home/user_projects/domains/mydomain/applications"
  StagedTargets="myserver" StagingMode="stage" TwoPhase="true">
  <WebAppComponent Name="Comergent" Targets="myserver"
    URI="Comergent.war" />
</Application>
```

Replace the text in italics with the appropriate paths for your installation of WebLogic 8.1.

6. Start the WebLogic server. The first time you start the server after following these steps, the **Comergent.war** file is expanded into the directory called *domain_home/myserver/stage/Comergent/Comergent.war/*. This process can take a few minutes.
7. Verify that you can log into the Comergent eBusiness System by pointing your browser to the standard URL:

```
http://<server>:<port>/Comergent/en/US/enterpriseMgr/matrix
```

For WebLogic servers, the default port number is 7001.

8. Once the WebLogic server has served the first page, you must stop the WebLogic server to complete the following steps. It ensures that the correct XML transformation library is used by the Comergent eBusiness System.
9. Copy the **xalan.jar** file that is in *domain_home/myserver/stage/Comergent/Comergent.war/WEB-INF/lib/* to the directory *container_home/jdk141_03/jre/lib/endorsed/*. If this directory does not already exist, then you must create it.
10. If you are using Oracle as the database server for your Knowledgebase, then copy the **oracledjbc.jar** file that is in *domain_home/myserver/stage/Comergent/Comergent.war/WEB-INF/lib/* to the directory *container_home/jdk141_03/jre/lib/endorsed/*. Edit the start script for the WebLogic server so that this JAR file appears first on the classpath. For example, on Windows 2000, in the **startWebLogic.cmd** file:

```
set CLASSPATH=container_home/jdk141_03/jre/lib/endorsed/oracle-
jdbc.jar;%WEBLOGIC_CLASSPATH%;...
```

Replace *container_home* with the absolute path to the container_home directory.

11. Add the following to the *domain_home/myserver/stage/Comergent/Comergent.war/WEB-INF/weblogic.xml* file:

```
<container-descriptor>
  <servlet-reload-check-secs>-1</servlet-reload-check-secs>
  <prefer-web-inf-classes>true</prefer-web-inf-classes>
</container-descriptor>
```

12. Navigate to *container_home/weblogic81/server/lib/*. Rename **ojdbc14.jar** to **ojdbc14.bak**. Copy the **oraclejdbc.jar** file to this directory and rename it **ojdbc14.jar**.
13. If you want to test CyberSource integration against a site which does not have a valid SSL certificate, then add the following to the command used to start the WebLogic server:

```
-Dweblogic.security.SSL.enforceConstraints=off
```

14. Restart the WebLogic server.

Pre-Compiling JSP Pages

As an optional step, we suggest that you pre-compile the JSP pages before going live to improve performance. You can follow the instructions provided by the *WebLogic JSP Reference* (consult the document currently at this URL: <http://edocs.bea.com/wls/docs81/jsp/reference.html>) to pre-compile JSP pages, or contact your Comergerent Technologies representative for further information.

WebLogic cleans up the directories of compiled JSP pages when the server is stopped and restarted. It is possible to use the **weblogic.xml** file to ensure that compiled JSP pages are preserved by specifying that the **keepgenerated** parameter is set to true, and specifying a working directory as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE weblogic-web-app
  PUBLIC "-//BEA Systems, Inc.//DTD Web Application 7.0//EN"
  "http://www.bea.com/servers/wls700/dtd/weblogic700-web-jar.dtd" >
<weblogic-web-app>
  <jsp-descriptor>
    <jsp-param>
      <param-name>
        keepgenerated
      </param-name>
      <param-value>
        true
      </param-value>
    </jsp-param>
    <jsp-param>
      <param-name>
        workingDir
      </param-name>
      <param-value>
```

```
Comergerent_jsp
</param-value>
</jsp-param>
</jsp-descriptor>
</weblogic-web-app>
```

Production Mode

If you want to run your WebLogic server in production mode, then you must do the following:

1. Create a new text file in *domain_home* called **.hotspot_compiler** whose contents are:

```
exclude oracle/sql/NUMBER_isPositive
exclude com/comergerent/dcm/dataservices/DsSchemaLoader loadDataObject
```

The syntax of each of these lines must be as follows:

```
exclude[space character]<Class name>[tab character]<Method name>
```

In effect, this file instructs the Hotspot compiler not to compile certain methods down to machine code.

2. In the command that starts up the WebLogic server, edit the command so that you include “-hotspot” immediately after the “-server” option. Typically, this is in the **commEnv.cmd** (Windows) or **commEnv.sh** (UNIX) file in the line that reads:

```
set JAVA_VM=-server
```

So change this to:

```
set JAVA_VM=-server -hotspot
```

XML Parsing

If an error message is displayed, then review CHAPTER 7, “Troubleshooting and Backing Up the Comergerent eBusiness System”. If you suspect problems with the XML parser settings, then you can set up an XML Registry for the WebLogic server as follows. Make the following changes to the *container_home/config/mydomain/config.xml* configuration file.

1. Add the following:

```
<XMLRegistry Name="Comergerent XML Registry"
  DocumentBuilderFactory=
    "org.apache.xerces.jaxp.DocumentBuilderFactoryImpl"
  SAXParserFactory=
    "org.apache.xerces.jaxp.SAXParserFactoryImpl"
  TransformerFactory=
    "org.apache.xalan.processor.TransformerFactoryImpl" />
```

2. Add the following attribute to the Server element: XMLRegistry="Comergent XML Registry". For example:

```
<Server ListenPort="7001" Name="server" NativeIOEnabled="true"
  StdoutDebugEnabled="true" StdoutSeverityLevel="64"
  TransactionLogFilePrefix="config/ICC/logs/"
  XMLRegistry="Comergent XML Registry">
```

Continue with the steps described in "Database Server Steps" on page 67.

Solaris and Oracle OCI Driver

Note that if you are using an Oracle database server for the Knowledgebase, then you can use the Oracle OCI JDBC driver to connect from the Comergent eBusiness System to the Oracle database server. See "Support for Oracle Server" on page 68 for further information.

Further Deployment Steps

Once you have deployed the application, you should review the following topics:

- "Database Server Steps" on page 67
- "Setting the Product Catalog Root" on page 73
- "Setting the Session Timeout" on page 74
- "Modifying the URL for the Web application DTD" on page 75
- "Managing Memory" on page 76
- "High Availability and Clustering" on page 76

Installing the Reference Comergent eBusiness System

This section describes the steps to install Comergent eBusiness System Release 7.0.2 without using the SDK. This simply provides you with a relatively quick verification of the basic deployment of our reference Web application. Before you start the process of customizing the Comergent eBusiness System, you should install the Comergent eBusiness System into the SDK and work in that environment to create your customized deployment.

These instructions use three logically distinct machines: the developer machine, the servlet container machine, and the database server machine. Depending on your situation, these machines may actually all be the same physical machine or different ones: we identify what steps are performed on which logical machine.

Make sure that you have the Java Development Kit (JDK) 1.4.2 installed on all three machines. The servlet container machine and the database server machine should have the database client tools installed to connect to the database server. You will need to know the database connection information required to connect from the servlet container machine to the database server.

1. Identify the location on your development machine in which you will unpack the installation files: we refer to this as **cmgt_home**.
2. Copy the release JAR file into **cmgt_home**.
3. Unjar the release JAR file by navigating to **cmgt_home** at the command line, and executing:

```
jar -xvf Comergent-7.0.2.jar
```

Note that the name of the JAR file may be slightly different from the name given here.

4. This unpacks the release JAR file and creates several sub-directories under **cmgt_home**.
5. You must now set the values of system properties that the Web application will need (such as the location of the database). At the command line, execute:

```
java -jar install/cmgt-preferences-tools.jar
```

If you are running on Linux, and see an error message, then you may have to install the **xorg-x11-deprecated-libs.rpm** RPM package appropriate for your Linux version.

6. The initial settings dialog box is displayed.




FIGURE 8. Initial Settings Dialog Box

7. Click the button to navigate to the release WAR file: the Open File dialog box should open up in the correct directory, and you just select the file named Comergent-7.0-def-RC-1.war (or something very similar to this). You should be able to leave the value of the Preferences store with its current value.
8. Click **Next**. The main Preferences Viewer window is displayed.

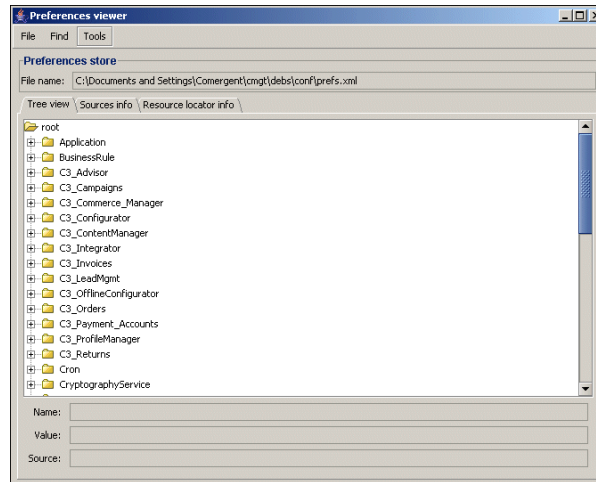


FIGURE 9. Preferences Viewer Window

9. Using this window, set the values for the following properties as follows:
 - a. Navigate to the `DataService.DataSource.ENTERPRISE.ConnectionString` property: when you do so, you should see the lower property panel display the name of the property, its current value, and where the value is stored:




FIGURE 10. Property Panel

- b. In the Tree View, right-click the Connect String property and select Modify Value.




FIGURE 11. Modify Value Dialog Box

- c. In the Modify Value dialog box, enter the correct value for the connection string property: this is the URL used by the data services layer to connect to the Knowledgebase database server. The form of this URL depends on the database type as follows:
 - For Oracle: “jdbc:oracle:thin:@<machine>:1521:<sid>”
 - For SQL Server: “<odbc_source>”
 - For DB2: “jdbc:db2://<machine>:50000/<instance>”
- d. Repeat these steps for the following properties:
 - DataServices.DataSource.ENTERPRISE.DataService:
 - For Oracle: “JdbcService”
 - For SQL Server: “OdbcService”
 - For DB2: “JdbcService”
 - DataServices.DataSource.ENTERPRISE.SrvSubType:
 - For Oracle: “ORACLE”
 - For SQL Server: “MS”
 - For DB2: “DB2”
 - DataServices.DataSource.ENTERPRISE.UserId
 - DataServices.DataSource.ENTERPRISE.Password
 - DataServices.General.jdbcdriver1:
 - For Oracle: “oracle.jdbc.driver.OracleDriver”
 - For SQL Server: set to the empty string
 - For DB2: “com.ibm.db2.jcc.DB2Driver”
 - DataServices.General.DsKeyGenerators: set to the database-specific value:
 - For Oracle: “OracleKeyGenerators.xml”
 - For SQL Server: “ODBCKeyGenerators.xml”
 - For DB2: “DB2KeyGenerators.xml”

- Cron.cronMsgURL: this value would normally be the URL of the messaging interface of this Comergent System interface; for example, `http://localhost:8080/Comergent/msg/matrix`.
 - You can set any other properties that you wish using the Preferences Editor, but these should be enough to get your reference deployment up and running.
10. When you have finished setting property values, click **File -> Save**.
 11. Click **File -> Exit**.

The new property values will be saved to the file: **cmgt/debs/conf/prefs.xml** in your home directory, referred to as **user_home** (for example: **C:\Documents and Settings\username** or **/export/home/username/**).
 12. If the database server is inaccessible from your current network location, transfer the appropriate sql-data file (depending on your DB_TYPE) to a temporary location, **cmgt_data_home**, on a machine that can access the database server machine:
 - **cmgt_home/sql/DB2sql-data-7.0-def-RC-1.jar**
 - **cmgt_home/sql/ODBCsql-data-7.0-def-RC-1.jar**
 - or
 - **cmgt_home/sql/Oraclesql-data-7.0-def-RC-1.jar**
 13. On this machine, at the command line navigate to **cmgt_data_home**.
 14. Unpack the JAR file by executing:

```
jar -xvf DB_TYPESql-data-7.0-def-RC-1.jar
```
 15. Edit the top-level batch script to add your connection information, and then run the script.
 - **DB2: DB2CreateSchema.bat or DB2CreateSchema.sh**

You must set the database name as seen from the current machine. Before running the DB2CreateSchema script, enter db2cmd. This opens a DB2 CLP window, and then run the DB2CreateSchema script from this window. Once you have run the script, then exit the DB2 CLP window.
 - **Oracle: OracleCreateSchema.bat or OracleCreateSchema.sh**

You must use the TNS alias name of the Oracle database server as seen from the current machine.

- SQL Server: **ODBCCreateSchema.bat**
You must use the ODBC source name of the SQL Server database as seen from the current machine.
16. Copy the following files to a temporary location, *cmgt_app_home*, on the servlet container machine:
 - *cmgt_home/Comergent-7.0-def-RC-1.war*
 - *user_home/cmgt/debs/conf/prefs.xml*
 - *cmgt_home/data/Comergent-xmldata-7.0-def-RC-1.jar*
 - *cmgt_home/data/cmgt-xmlloader-tool.jar*
 - For Windows/SQL Server installations: *cmgt_home/lib/Cmgt7OdbcJNI.dll*
 17. On the servlet container machine, copy the *cmgt_app_home/prefs.xml* file to the following directory (which you may have to create): *user_home/cmgt/debs/conf/prefs.xml*. Note that this should be the *user_home* for the user that is used to run the servlet container.
 18. If you are running in a Windows environment and connecting to a SQL Server instance, then copy the *cmgt_app_home/Cmgt7OdbcJNI.dll* file to the **system32/** directory of the servlet container machine.
 19. If you are running against either Oracle or DB2, then install the appropriate JDBC JAR file into the servlet container so that it can be used by the Comergent eBusiness System web application when deployed. In the Tomcat Application Server, these JAR files should be installed by placing them in the *container_home/common/endorsed/* directory. In WebLogic application servers, this step is probably unnecessary, since WebLogic servers are deployed with an extensive collection of JDBC clients.
 20. Make sure that you are logged in as the user who is running the application server, and at the command line, navigate to *cmgt_app_home*.
 21. Unpack the **Comergent-xmldata-7.0-def-RC-1.jar** file by executing:

```
jar -xvf Comergent-xmldata-7.0-def-RC-1.jar
```
 22. Execute the full data load.
 - a. On UNIX, run:

```
loadDBFromXML.sh full <jdbc_jar_file.jar>
```

where *<jdbc_jar_file.jar>* is the full path to your JDBC driver. If you get a permissions error, then modify the permissions on the script to give yourself execution privileges.

Attention: On Linux, if you see errors reporting that a network connection cannot be established to the database server, then check that you do not have Secure Linux enabled. If need be, navigate to `/etc/sysconfig/selinux` and make sure that the following is set:

SELINUX=disabled

- b. For Windows configurations with using ODBC to connect to the Knowledgebase database server, run:

```
loadDBFromXML full
```

- c. For Windows configuration with JDBC, run:

```
loadDBFromXML full <jdbc_jar_file.jar>
```

where *<jdbc_jar_file.jar>* is the full path to your JDBC driver.

Note that you can load just the minimal data, by specifying “minimal” rather than “full” when you run this command.

23. Rename the *cmgt_app_home/Comergent-7.0-def-RC-1.war* file to **Comergent.war** and deploy it to the servlet container using the steps described in "Deploying the Comergent Web Application" on page 33.
24. Restart the application server.
25. You should now be able to point your browser to the standard Comergent eBusiness System URL and log in as the enterprise administrator user admin/admin.

Database Server Steps

Depending on which database server you use with the Comergent eBusiness System, perform the required steps in this section. You should also consult "Managing Database Connections" on page 70 for information about connection pooling, and "Sorting in Locales" on page 161 for information about data services configuration settings.

Support for DB2 Server

If you plan to use DB2 Server for your database server, then you must run the `installDB2` and `env.setDBType` targets as part of the installation of the Comergent eBusiness System. This ensures that the DB2 JDBC drivers are in the deployed Web application.

Support for Oracle Server

If you plan to use Oracle Server for your database server, then you must run the `installOracle` target as part of the installation of the Comergent eBusiness System. This ensures that the Oracle JDBC drivers are in the deployed Web application.

If you plan to use the OCI driver to connect from the Comergent eBusiness System machine to the Oracle Server, then you must make sure that the OCI driver is set up correctly. On a UNIX system:

1. Make sure that the OCI **liboci*jdbc.so** file is installed on the Comergent eBusiness System machine. The “*” in the name of the file is the version number of the OCI library.
2. Make sure that the servlet container scripts ensure that the `LD_LIBRARY_PATH` includes the location of the OCI **liboci*jdbc.so** file and that `ORACLE_HOME` is set to point to the location of the Oracle client tools.
3. Make sure that the Oracle JAR file matches the version of the OCI library file:

TABLE 8. OCI library and JDBC Driver Files

OCI Library	JDBC JAR File
oci804jdbc.so	Oracle.jar
ocijdbc8.so	Classes111.zip

Support for SQL Server

If you are running the Comergent eBusiness System on a Windows system and plan to use SQL Server for your database server, then you must perform the following steps.

1. Copy the **OdbcJNI.dll** file from *debs_home/Comergent/WEB-INF/lib/winnt/* to the *C:\WINNT\system32* directory. Note that the `installODBC` target will do this on a machine running the SDK, but if your deployment machine is different from the SDK machine, then you must do this step manually.

2. As part of installing the Comergent eBusiness System, you should have run the installODBC target. If you have not done this, then you must ensure that the correct data object definitions are in place. In the schema directory, overwrite the following files with the files prepended with Odbc:

- **ConfigVersionLookup.xml**
- **ItemsRefLookup.xml**
- **ModelSubGroup.xml**

3. If you plan to support data in locales other than en_US, then you must consider how basic searches are performed. If you do not want searches to differentiate between upper and lower cases instances of the same character, then you must provide values for the elements LowerCase and UpperCase of the Microsoft element of the **DataServices.xml** file.

Set LowerCase to "LOWER(" and UpperCase to "UPPER("; for example:

```
<UpperCase controlType="text" runtimeDisplayed="true"
ChangeOnlyAtBootTime="true" visible="true" boxsize="45"
displayQuestion="UpperCase SQL Function" defaultChoice=""
help="Enter the SQL function that converts strings to uppercase
for the selected database.">UPPER(</UpperCase>
```

Note that the use of the UPPER and LOWER functions in searches means that indexes on the tables are not used and this can result in reduced performance.

4. If more than one deployment of the Comergent eBusiness System is accessing the same Knowledgebase on SQL Server, then you must take to set a two-digit server ID for each deployment.
 - a. If the machines are not clustered, then set the ServerId element in the **DataServices.xml** file so that each has a unique integer value: 01, 02, and so on.
 - b. If the machines are clustered, then you must modify the servlet container command or script that starts the servlet container on each machine so that a Java system property is set: Comergent.DataServices.General.ServerId. This should be set on each machine so that each has a unique value: 01, 02, and so on.

For example, in a Tomcat installation, you can modify the batch file to include:

```
set JAVA_OPTS=-DComergent.DataServices.General.ServerId
```

Managing Database Connections

This section covers information about how to manage the connections between the Comergent eBusiness System and the Knowledgebase.

Configuration Files

The following files manage the configuration of the data services layer:

- **DataServices.xml**: this file is contained in the **cmgt-dataservices.jar** JAR file that ships with the Comergent eBusiness System. This file specifies values for all the data services properties unless they are overridden by the **prefs.xml** configuration file.
- **prefs.xml**: this file contains the properties and their values created during the installation process. In addition, if you make changes to the system properties through the Comergent eBusiness System administration UI, then the changes are persisted to this file.

Connection Pooling

This section answers some common questions about connection pooling.

- What is the purpose of connection pooling?
- How does Comergent's connection pooling work?
- Why are there separate query and update connection pools?
- How do I validate connections prior to reuse?
- How can I limit the number of connections used?
- How can I free up connections when demand drops?
- What happens when connection limits are reached?
- Why are the connection limits on the data source?

Common Problems

- My database requests fail with a "connection reset by peer" message
- My database connections are not being released when traffic drops
- I share a database with other applications. I cannot allow the Comergent eBusiness System to use more than n connections

What is the purpose of connection pooling?

Establishing a database connection is typically processor-intensive. The use of connection pools allows us to maintain a set of open connections for use by database requests. These connections can then be allocated to short duration SQL requests and then immediately returned to the pool for re-use.

How does Comergent's connection pooling work?

The Comergent eBusiness System maintains these logical pools of connections:

- Pool of message-based connections. This pool is simply a HashMap that mates a message version to an appropriate Message-based DataService. One DataService instance is shared by all requests requiring that message version.
- Pool of database connections. This pool is used for all database requests. When a data bean *persist()* or *restore()* method is invoked, we retrieve a connection from the pool; process the operation; then return the connection to the pool for reuse.

In past releases the Comergent eBusiness System supported sharing a database connection across multiple concurrent requests. Not all databases are capable of supporting this functionality. In addition, performance testing has shown that an expensive SQL request can drastically impact the performance of all requests sharing the same connection. Based on these issues, the Comergent eBusiness System has eliminated support for sharing of Query connections.

In Release 6.3 and later releases, there is one Query connection pool and one Update connection pool for each SQL-based data source. This allows further tuning and optimization of the connection pools.

Why are there separate query and update connection pools?

The use of separate pools for Query and Update Connections allows the Comergent eBusiness System to optimize connections for read-only access.

How do I validate connections prior to reuse?

The following properties control connection timeout and validation:

- The ConnectTimeout element provides a timeout setting for connections in the pools. The value is the number of minutes for a connection to timeout. For example, if you set this value to "1", then if a connection has been unused for more than one minute, it is validated before being used. A setting of 0 means that connections do not timeout.

- The ReconnectOnTimeout element controls what is done when a connection timeout.
 - A setting of “true” indicates that when a connection times out it will automatically reconnect the next time it is retrieved from the pool.
 - A setting of “false” indicates that a connection timeout will result in the connection being validated prior to reuse. If the validation fails, then a reconnect will occur.

How can I limit the number of connections used?

Each DataSource specified in the **DataServices.xml** configuration file supports a MaxConnections property. This specifies an absolute upper limit on the number of connections that will be used. A setting of “-1” indicates there is no limit.

How can I free up connections when demand drops?

Each DataSource specified in the **DataServices.xml** configuration file also supports a MaxPoolSize property. This provides a soft limit on the number of connections that will be pooled. A setting of “-1” indicates there is no limit. The pool size is not an absolute limit, but as connections are released the pool will gradually move back down to its maximum size.

The Comergent eBusiness System does allow the number of connections to grow beyond the maximum pool size, but when the number of free connections exceeds a preset limit we will begin releasing connections until the number of connections eventually drops back to the maximum pool size. We do this gradually to avoid excessive connection requests when pool is at the boundary.

What happens when connection limits are reached?

If a connection is requested from the pool, but no free connections are available, then we would normally create a new connection. If the connection limit is reached, then we will instead wait for a connection to be returned to the pool.

Why are the connection limits on the data source?

Providing connection limits for each data source provides greater flexibility in allocating connection resources. For example, this allows you to limit the number of connections to a back-end ERP system, while providing higher limit when accessing the primary database server.

Common Problems

My database requests fail with a “connection reset by peer” message

This error is normally a result of either the database server timing out the database connection, or of the network connection being timed out by a firewall. This problem can be resolved by setting the `ConnectionTimeout` element to ensure validation of connections that exceed the timeout.

My database connections are not being released when traffic drops

Setting the `MaxPoolSize` property on the data source will allow the number of database connections to drop back to predefined limits as connections are freed.

I share a database with other applications. I cannot allow the Comergent eBusiness System to use more than n connections

Setting the `MaxConnections` property on the data source will allow you to limit the maximum number of database connections used by the Comergent eBusiness System.

Pagination Settings

The Comergent eBusiness System supports the use of paginated data sets so that long lists can be displayed one page at a time. This functionality is implemented by saving a set of files to the Comergent eBusiness System machine’s file system. These represent the pages of data objects to be paged through. The location of the paginated file sets is determined by the `rsCachePath` element in the **DataServices.xml** file. The `rsCachePathIsAbsolute` element is used to specify whether the value of the `rsCachePath` element should be treated as a relative or absolute path. By default, its value is “false” and so the path is treated as being relative to *debs_home/Comergent/*. The `adjustFileName()` method call is used to resolve this location to an absolute location in the servlet container’s file system.

If your implementation of the Comergent eBusiness System uses a cluster of servlet containers, then the location of the pagination directory must be accessible to all members of the cluster. See "High Availability and Clustering" on page 76.

Setting the Product Catalog Root

The product catalog in the Comergent eBusiness System is structured as a tree of product categories. As a user browses the product catalog, they can navigate from each product category down to its child product categories. Similarly, an

administrator can navigate through the product category hierarchy as they create and modify product categories and products.

The root node of the product category is created as part of the minimal data set. All product categories are descendants from this root node. When the product category is displayed, the root node label is: “Product Categories”. This label is specified as the MTMenuText variable in the **cmgtProdMgrTreeViewParam.js** file located in the **debs_home/Comergent/en/US/js/** directory. As part of implementation, you can change this value to appropriate text such as “Product Catalog” or “Departments”.

Note that if your implementation of the Comergent eBusiness System supports more than one locale, then you must make the corresponding changes in the same file in the other locale directories.

Setting the Session Timeout

Servlet containers and Web applications attach a session to each user interaction with the server. By this means, they can maintain information from one request to another as a user interacts with the application. To help ensure that a user’s browser is not used by an unauthorized user, the servlet container will mark a session as being invalid once a certain time has elapsed from the time when the session was last accessed. This is referred to as the session timeout period. Sessions automatically become inactive if the time from the last access exceeds the session timeout setting.

You can set the session timeout period in the Comergent eBusiness System **web.xml** configuration file using the session-timeout element. For example, to timeout sessions after 30 minutes, set the element to:

```
<session-timeout>30</session-timeout>
```

When setting the session timeout period, bear in mind the following:

- The longer the time out, the greater the risk that the servlet container will run out of memory. Each session takes up space in memory, and when objects are added to the session, then the memory usage increases. Often, users may not actively log out: their session will stay resident in memory until the servlet container times it out. If your Web site is likely to see heavy user traffic, then bear in mind this memory consumption when determining JVM memory settings.

- The longer the timeout, the greater security risk presented: either by an unauthorized person using an unattended Web browser or by an unauthorized person spoofing a session simply by guessing its session ID.
- The session timeout period must be sufficiently long to enable users to complete their tasks. If the tasks include activities such as using a third-party Web application or obtaining information from a third-party source, then allow for this amount of time so that a user is not inadvertently timed out of the Comergent eBusiness System.

In particular, note that if your users are using the **C3** Configurator Release 4.1, then when they initiate a configuration of a product, they are not accessing their Comergent eBusiness System session. If they take longer to configure a product than the session timeout period, then they will not be able to return their Comergent eBusiness System session. If you are implementing **C3** Configurator as part of Release 7.0.2, then this is no longer a concern.

Bear in mind that in some use cases, the cost to a user of losing their session may be high: if they have created a product inquiry list by punching out from a procurement application using **C3** MarketLink, then when their Comergent eBusiness System session times out, they will lose access to any data created before the timeout.

For these reasons, we suggest setting a session timeout value of 30 (30 minutes). However, you must assess the needs of your implementation and select a value accordingly.

Modifying the URL for the Web application DTD

When you start the servlet container, the Comergent eBusiness System is loaded as a Web application. The **web.xml** file configuration file is read to determine the basic configuration of the application. The **web.xml** file is validated against a DTD specified by its web-app element.

By default, the validating DTD is at the URL:

`http://java.sun.com/dtd/web-app_2_3.dtd`

However, access to this URL can be limited either by your network status or by Sun Microsystems. As an implementation step, we recommend that you modify the validating URL to point to a copy of the DTD whose location is assured by your implementation.

Our suggested solution is to use a relative URL to reference the DTD within the Comergent context. For example:

```
/WEB-INF/lib/web-app_2_2.dtd
```

Note that the form of this relative URL is servlet container-specific.

Alternatively, you can add the DTD to a Web server and point to this location. For example, if you are using a Web server to act as a front-end to the Comergent eBusiness System, then put the DTD on this Web server.

Managing Memory

In general, you should allocate as much memory as possible to the JVM running your application server. Typically, this is done by modifying the configuration parameters that are used to start the Java process, say:

```
-Xms256M -Xmx512M -XX:MaxPermSize=128M
```

However, if your system is likely to experience heavy load at times, then you can use a Comergent eBusiness System configuration parameter to ensure that the system can recover from a burst of memory-intensive activity.

Set the `memoryThreshold` element of the `C3_Commerce_Manager` element of **Comergent.xml** to an integer value between 0 and the maximum allocated memory size (in Kilobytes). When memory usage exceeds this value, then new requests will be refused with the HTTP status of 503. The default value, -1, disables the parameter.

For example, suppose that you have set the maximum memory to -Xmx512M (524,288K). Suppose that you set `memoryThreshold` to 498074. Then when memory usage exceeds 498,074K, new requests are refused until memory usage has dropped back down to below this value.

High Availability and Clustering

The Comergent eBusiness System can be deployed in a distributed environment in which more than one individual instances of the Comergent eBusiness System run as a cluster. This provides support for ensuring high availability of the Comergent eBusiness System and to support fail-over of individual machines. See CHAPTER 27, "Installing a Clustered Implementation" for more information.

Sharing Directories

In some deployments of the Comergent eBusiness System, for example a clustered deployment, you must specify the location of directories to be used for uploaded and generated files. The locations of these directories is specified using the **web.xml** file to set context parameters.

Note:	This is a change from earlier releases of the Comergent eBusiness System which used the Comergent.xml to specify these locations.
--------------	--

You have these sets of attributes for the directories to specify:

- **share-noshare:** share directories can be accessed by two or more machines, noshare directories should be accessed only by the machine whose **web.xml** file specifies the location.
- **public-private:** public directories must be accessible by the Web server serving the static content, private directories should not be.
- **loadable-noloadable:** loadable directories can be used to upload files, noloadable directories should not be used for uploaded files.

The same directory can be used for more than one of these combinations of choices.

At minimum, you must specify the location of the **share.public.loadable** and **share.public.noloadable** directories. If you have two or more machines in a cluster, then these directories must be accessible from all of the cluster machines.

The **web.xml** file lets you specify how a front-end Web server can access files in the public directories. Use the **WebPathToPublicLoadableWritableDirectory** element to map a Web server virtual path to the directory identified by the **share.public.loadable** element. Use the **WebPathToPublicNoLoadableWritableDirectory** element to map a Web server virtual path to the directory identified by the **share.public.noloadable** element. These elements should reflect the Web server settings used to specify virtual paths.

To set these directories up, typically, you perform these steps:

1. Select one of the machine as the “primary machine”. Allocate a directory on this machine to provide the shared location.
2. Share this location so that all member of the cluster have access to it:
 - Windows: share this directory to the other machines
 - UNIX: use NFS to share the directory

3. On all machines, mount the file system so that all cluster member have the same mount point to this directory. For example:

```
/DEBS_shared
```

4. Under **DEBS_shared/**, create a sub-directory for each of the categories shown in the configuration file (loadable, writable, and so on). For example:

```
/DEBS_shared/lw
```

and set that value in the configuration file. For example:

```
<loadable ...>/DEBS_shared/lw</loadable>
```

Directory and File Organization

When the **Comergent.war** Web application is deployed to the servlet container, it is deployed into a directory, *debs_home*, that you specify during the deployment or which the servlet container sets. This section describes the organization of the sub-directories under *debs_home*.

Beneath this directory, a sub-directory is created for the Comergent Web application when the Web application is deployed. This directory is the Web application directory for the Comergent eBusiness System. We refer to it as *debs_home/Comergent/*. It contains:

- A locale directory for each supported locale. Each locale may be expressed as *<la>_<CO>*, where *la* is one of the standard language codes and *CO* is one of the standard country codes, for example: *en_US* or *fr_CA*. For a locale, the corresponding directory is *debs_home/Comergent/la/CO/*. This directory contains:
 - **css/**: holds the cascading style sheets used by the Comergent eBusiness System.
 - **images/**: holds common images used by the Comergent eBusiness System.
 - **js/**: holds Javascript libraries used by the Comergent eBusiness System.
 - **htdocs/**: holds the HTML templates, images, and online help for the Comergent eBusiness System.
- **dXML/**: holds the DTDs for the dXML message types.
- **htdocs/**: a directory for content that can be served up directly by the servlet container or Web server. Content stored here should not be locale-specific.

- **j2ee/**: a directory to hold local copies of the J2EE DTDs. See "Modifying the URL for the Web application DTD" on page 75 for more information.
- **WEB-INF/**: holds all the configuration files used by the server. It contains the following subdirectories:
 - **bizobj/**: holds the business object DTDs. These DTDs are used to validate XML messages. The DTDs can be generated automatically by the generateDTD target provided by the SDK.
 - **classes/**: holds the Comergent eBusiness System Java classes.
 - **commerceone/**: used as part of Commerce One integration.
 - **converters/**: holds the configuration files used in message conversion.
 - **data/**: holds data provided as part of the reference implementation.
 - **extralib/**: holds class libraries that are needed for implementation work, but that should not be used at runtime.
 - **integrator/**: holds the configuration files for **C3** Integrator.
 - **lib/**: holds the Java class libraries used by the Comergent eBusiness System Web application.
 - **lib/winnt/**: this holds any Windows-specific DLL files that are required.
 - **messages/**: holds the DTDs for the Comergent message family. See the *Comergent eBusiness System Reference Guide* for more information.
 - **properties/**: holds the **Comergent.xml** file and the other configuration files used to set the configuration of the server.
 - **reports/**: holds the files required for **C3** Analyzer.
 - **rosettanet/**: contains the DTD and XML files that define the RosettaNet messages supported by the Comergent eBusiness System.
 - **schema/**: holds the XML files that specify the schema for your implementation. See CHAPTER 22, "Integrating with External Data Sources" for more information.
 - **stylesheets/**: holds the XSL files used to translate messages from one message family to another.
 - **templates/**: holds the text templates used to generate messages such as email notifications.

- **web/**: holds most of the JSP pages, HTML pages and support files for the applications. It has the following structure:

/locale/ directories for each of the Comergent eBusiness System applications. Each locale supported by your implementation of the Comergent eBusiness System must have its own set of JSP pages in its corresponding locale directory.

Each locale may be expressed as `<la>_<CO>`, where `la` is one of the standard language codes and `CO` is one of the standard country codes, for example: `en_US` or `fr_CA`. For a locale, the corresponding directory is `debs_home/Comergent/WEB-INF/web/la/CO/`.

- **x509/**: holds the certificates used to authenticate SSL sessions.

Setting Up Apache as a Front-end to Tomcat

This section describes how to set up an instance of Apache Web Server Release 2.0.54 so that it can act as a front-end to a deployment of the Comergent eBusiness System on Tomcat 5.5.x. It uses the JK 1.2 connector supplied by the Apache Jakarta Project.

This section assumes that Apache and Tomcat are installed on two different machines: referred to as the Web server machine and servlet container machine respectively.

Prerequisites

1. Install Apache Web Server Release 2.0.54 on the Web server machine.
2. Deploy the Comergent eBusiness System into the instance of Tomcat running on the servlet container machine.
3. You should confirm that both Apache and Tomcat can be started individually with no error. In particular, make sure that the deployment of the Comergent eBusiness System in Tomcat works correctly using the Tomcat port.

Overview

JK 1.2 is a connector that connects an Apache instance with a Tomcat instance. This allows Apache to serve as a front-end Web server for Tomcat. There are several advantages for this kind of setup:

- You can configure Apache to manage page expiration (reducing number of HTTP requests).

- You can configure Apache to compress responses (reducing the number actual bytes transmitted).

Once the connector is setup and configured to work properly, a typical request flow is followed (using default ports):

1. The browser connects to Apache's port 80 and submits its request.
2. `mod_jk` determines if the incoming URL needs to be managed by `mod_jk`.
3. If so, then Apache initiates a AJP 1.3 connection to Tomcat's port 8009. The request is now sent to Tomcat.
4. Tomcat processes the request and returns the response through the same AJP 1.3 connection.
5. Apache in turn relays the same responses to the browser.

Configuring Apache to Use `mod_jk`

1. Get a copy of **`mod_jk-1.2.13-apache-2.0.54.so`** for Apache 2.0.54. At the time of release, the location is supported by mirrors: look for a directory called `jakarta/tomcat-connectors/`. For the rest of these instructions, we assume that you rename this file to **`mod_jk.so`**.

2. Put the **`mod_jk.so`** file in the Apache Web server *apache_home/modules/* directory.

3. Add the following line to *apache_home/conf/httpd.conf*:

```
LoadModule jk_module modules/mod_jk.so
```

Take care to provide the exact name of the module file.

4. Add an `IfModule` element to *apache_home/conf/httpd.conf* as follows:

```
<IfModule mod_jk.c>
    JkWorkersFile apache_home/conf/workers.properties
    JkLogFile apache_home/logs/mod_jk.log
    JkLogLevel info
    JkMount /Comergent/* ajp13
</IfModule>
```

5. Copy the sample Tomcat *tomcat_home/conf/workers.properties* configuration file to *apache_home/conf/workers.properties*. Edit the file to add the following to it:

```
worker.list=ajp13
worker.ajp13.port=8009
worker.ajp13.host=<servlet_container>
worker.ajp13.type=ajp13
```

Replace `<servlet container>` with the name of the servlet container machine.

Configure Tomcat to Use mod_jk

By default, Tomcat is pre-configured to listen on port 8009 for ajp13 connections so nothing else is needed to be done. However, you should check that the following entry is in the Tomcat *tomcat_home/conf/server.xml* file:

```
<Connector className="org.apache.coyote.tomcat4.CoyoteConnector"
  port="8009" minProcessors="5" maxProcessors="75"
  enableLookups="true" redirectPort="8443"
  acceptCount="10" debug="0" connectionTimeout="20000"
  useURISValidationHack="false"
  protocolHandlerClassName="org.apache.jk.server.JkCoyoteHandler"/>
```

Starting Apache and Tomcat

1. Start up Apache, then start up Tomcat.
2. Try:

```
http://<web_server>/Comergent/en/US/enterpriseMgr/matrix
```

to verify that you can access the Comergent eBusiness System through Apache.

Setting up Apache to Support SSL

If you set up Apache as a front-end to Tomcat, then you can use the SSL capabilities of Apache to manage secure access to the Comergent eBusiness System. The following steps provide an outline as to how to do this. Note that we do not provide a compiled binary of the Apache SSL module. You must either obtain this from a third-party such as: <http://hunter.campbus.com/>, or build it yourself using the OpenSSL source obtained from: <http://www.openssl.org/source/>. Once you have created **mod_ssl.so** and copied it to *apache_home/modules/*, then follow these steps:

1. Uncomment in the following line in *apache_home/conf/httpd.conf*:

```
LoadModule ssl_module modules/mod_ssl.so

and

<IfModule mod_ssl.c>
    Include conf/ssl.conf
</IfModule>
```

2. Create the file *apache_home/conf/ssl.conf*. This file is where you specify your SSL configuration using the SSL directives. It should look something like this:

```
Listen 443
```

```
<VirtualHost _default_:443>
ServerName http://www.example.com
SSLEngine on
SSLCertificateFile /usr/local/apache2/conf/server.cert
SSLCertificateKeyFile /usr/local/apache2/conf/server.key
</VirtualHost>
```

3. Obtain or generate the certificates and keys for your site. You can use the openssl utility to generate a self-signed key and certificate using commands like this. First create the key by using:

```
openssl req -new -nodes -out server.csr
-keyout server.key -config openssl.cnf
```

Then use the key to generate the certificate:

```
openssl x509 -in server.csr -out server.crt -req
-signkey server.key -days 365 -set_serial 1 -config openssl.cnf
```

The -config parameter points to your **openssl.cnf** configuration file that can be used to maintain OpenSSL configuration information.

4. Copy the key and certificate to the location specified by the SSLCertificateFile and SSLCertificateKeyFile properties of the **ssl.conf** file.
5. Restart Apache.

Keep Alive Settings

In some circumstances, problems have been reported with Apache and SSL such as slow and dropped connections. If you encounter these, then consider these steps:

1. Make sure that the setting for KeepAlive is On in **apache_home/conf/httpd.conf**:

```
KeepAlive On
```

It appears that this setting is set to Off as default in some distributions of Apache.

2. Older versions of IE, in particular IE 5.x, have a bug in the SSL/TSL shutdown and keepalive feature. A work-around for these bugs is to configure Apache's SSL to behave in a non-standard way for these connections. In **apache_home/conf/ssl.conf**, add the following lines if they are not there already:

```
SetEnvIf User-Agent ".*MSIE.*" \
nokeepalive ssl-unclean-shutdown \
downgrade-1.0 force-response-1.0
```

Filtering Static Content

In general, you should use a servlet container in conjunction with a Web server. The Web server can be used to serve other content for your Web site. In addition, the Web server can be used to serve static content from the Comergent eBusiness System. In this way, you can enhance the performance of your Web site.

Setting up Apache to Serve Static Content

If you have Apache running as a Web server in front of your servlet container, then you can make use of Apache's capabilities to serve static content. In this section, we show how to use the `expires_module` module to mark images so that a client's browser caches images rather than re-requesting them each time a page displays the image. In particular, this approach can be used to prevent image-flicker if a user has their browser settings such that images are re-loaded from the server on every visit to the page.

These instructions assume that the Apache Web server and the Tomcat servlet container are running on different machines.

Follow these steps:

1. Edit the Apache **httpd.conf** configuration file to add or uncomment:

```
LoadModule expires_module modules/mod_expires.so
```

2. Add the following expires rules:

```
ExpiresActive On
ExpiresByType image/gif "access plus 1 day"
ExpiresByType image/jpg "access plus 1 day"
ExpiresByType text/css "access plus 1 day"
ExpiresByType text/js "access plus 1 day"
```

In these lines, you are specifying that the expires module is active, and that by default all the static content served by the Apache Web server should be cached by browsers for one day after accessing it. You can change these settings to meet the needs of your deployment of the Comergent eBusiness System.

3. Restart the Apache Web server.

Note:	Note that under certain circumstances, this may give rise to unwanted behavior. For example, if partner administrators frequently upload partner logos in the form of GIF files, then some storefront users who have the older version of the GIF file already cached will not see the new version of the GIF file until a day passes.
--------------	--

Setting up Microsoft IIS and Macromedia JRun

We recommend that you set up an external Web server to act as front-end Web server rather than use the default Web server provided with JRun. Follow the instructions provided by JRun to set up a Connector between IIS and JRun.

You can use the IIS Web server to serve up the static content of the Comergent eBusiness System: this reduces the load on the JRun server and can improve performance of the Comergent eBusiness System. Follow the following steps to implement the filtering of static content:

1. Copy the dynamic library **debs.dll** from *debs_home/Comergent/lib/winnt/* to the scripts directory of your IIS installation. In a default installation of IIS, this directory is **C:\inetpub\Scripts**.
2. Copy the file **debs.ini** to the same location.
3. Start the Internet Information Services (IIS) Management Console: click **Start -> Programs -> Administrative Tools -> Internet Services Manager**.
4. Right click on the machine name, and select **Properties**.
5. Select WWW Services from the Master Services drop-down list, and click **Edit**.
6. Select ISAPI Filter, and click **Add**.
7. In the Filter Properties dialog box, enter the name of the filter: "DEBS". Click the **Browse** button to navigate to the location of the **debs.dll** file in the IIS scripts directory.
8. Click **OK**, and exit the IIS Management Console.
9. Restart the World Wide Web Publishing Service.
10. Repeat Step 3 on Page 85, Step 5 on Page 85, and Step 6 on Page 85. Select ISAPI Filter, and using the **Up** arrow, move the DEBS filter above the JRun filter.

11. Click **OK**, and exit the IIS Management Console.
12. Create a new directory called “static” under the IIS document root (in a default installation of IIS, this directory is `C:\Inetpub\Wwwroot\`).
13. Using the IIS Management Console, navigate to the static directory, right click the folder icon and select **New** to create a new virtual directory. Give the alias as “Comergent”.

As part of creating the virtual directory, you need to specify where the alias Comergent will point to. It must point to `jrun_home/servers/default/Comergent/` (`jrun_home/` is the directory where JRun is installed).

14. You are prompted for: “Directory”. Browse to `jrun_home/servers/default/Comergent/`. Click **OK**.
15. Restart the World Wide Web Publishing Service.

Creating a NSAPI Filter

We provide a small file of C code that can be used to ensure that certain files are served by the Web server rather than by the iPlanet Application Server. It uses the NSAPI.

1. Locate the `ctrans.c` file under `debs_home/`.
2. Compile it to a dynamic library.

For Solaris, the compile command is:

```
gcc -DXP_Unix -DMCC_HTTPD -DNET_SSL -DSOLARIS -D_REENTRANT -Wall -
c module.c
*   ld -G module.o -o module.so
```

For Windows, the compile command is:

```
cl -LD -MD -DMCC_HTTPD -DXP_WIN32 -DNET_SSL module.c -
Insapl\include /link nsapi\examples\libhttpd.lib
```

3. Add the module to the NameTrans directive in the Web server’s **obj.conf** configuration file as follows:

- a. Find the block where all the Inits are declared. Add line:

```
Init fn="load-modules" shlib="/container_home/local/nsapi/comer-
gent.so" funcs="handle_comergent_static"
```

Replace the string `/container_home/` with the appropriate path.

- b. Find the block:

```
<Object name="default">
```

- c. Add the line:

```
NameTrans fn="handle_comergent_static"
```

By default, use the following values for the parameters:

```
. prefix /NASApp/Comergent/  
. newPrefix /container_home/ias6/ias/APPS/modules/Comergent/  
. list *.css, *.gif, *.js, *.jpg
```

If you need to override any of the above values, then append them to the "NameTrans" line. For example:

```
NameTrans fn="handle_comergent_static"  
newPrefix="container_home/ias6/ias/TEST/modules/Comergent/"
```

Compressing Output From the Comergent eBusiness System

If network performance is a high concern, then one step that you can take is to configure the Comergent eBusiness System so that it returns compressed output to the users' browsers, and the browsers decompress the output to render the page. This section describes how to use Apache to do this. Note that an alternate approach is to use Servlet Specification 2.3 filter to perform the compression.

These steps assume that you have set up Apache as a front-end to the servlet container in which the Comergent eBusiness System is deployed. For example, see "Setting Up Apache as a Front-end to Tomcat" on page 80.

1. Edit the Apache **httpd.conf** configuration file to add or uncomment:

```
LoadModule deflate_module modules/mod_deflate.so  
LoadModule headers_module modules/mod_headers.so
```

2. Copy the following text into **apache_home/conf/httpd.conf**. Putting it at the bottom of the file is fine.

```
<Location /Comergent>  
  
# Insert filter  
SetOutputFilter DEFLATE  
  
# Netscape 4.x has some problems...  
BrowserMatch ^Mozilla/4 gzip-only-text/html  
  
# Netscape 4.06-4.08 have some more problems  
BrowserMatch ^Mozilla/4\.0[678] no-gzip  
  
# MSIE masquerades as Netscape, but it is fine  
# BrowserMatch \bMSIE !no-gzip !gzip-only-text/html
```

```
# NOTE: Due to a bug in mod_setenvif up to Apache 2.0.48
# the above regex won't work. You can use the following
# workaround to get the desired effect:
BrowserMatch \bMSI[E] !no-gzip !gzip-only-text/html

# Don't compress images
SetEnvIfNoCase Request_URI \.(?:gif|jpe?g|png)$ no-gzip dont-vary

# Make sure proxies don't deliver the wrong content
Header append Vary User-Agent env=!dont-vary

</Location>
```

The context string “/Comergent” should be changed if need be to the name of the context used for the Comergent eBusiness System.

3. Restart the Apache Web server.

Setting up a Partner Enterprise Server

During the implementation cycle it is useful to have a partner enterprise server set up so that you can test the exchange of price and availability messages and shopping cart transfer messages between your enterprise server and another. This section describes setting up a reference partner called Anderel for this purpose.

Most steps are identical to the ones you have performed setting up your enterprise server: in this section we cover only the steps that are different. While it is possible to perform these steps on the same machine used for the enterprise server, we suggest that you use a separate machine (called *partner_machine*) and servlet container, and these instructions assume that setup.

1. Starting with the **Comergent.war** file provided, perform the basic installation steps as described in "Installing the Comergent eBusiness System" on page 37.
2. In the **Comergent.xml** file, set the following properties to these values:

```
C3_Commerce_Manager.General.EmailSenderName:
changeme@changeme.com
Hosting.DefaultHostedPartner: anderel
Hosting.isResident: false
Hosting.ManufacturerName: Anderel
```

3. Set up a database, tablespace, username, and password that you will use for the Anderel Knowledgebase, and edit the **DataServices.xml** file if need be to point to the **DataSources.xml** file you want to use for the Anderel partner. For

example, you can use **AnderelOracleDataSources.xml** in *debs_home/Comergent/WEB-INF/schema/* to set the database connection information.

4. Locate the appropriate **DataSources.xml** file defined in Step 3 on Page 88, and edit it to provide the appropriate connection information.
5. Run the schema creation scripts as described in CHAPTER 6, "Creating and Populating the Knowledgebase". If you have the Anderel server set up in your SDK as a distinct project, then you can run the createdB target for this project.
6. Run the XML data loading scripts as described in "Populating the Knowledgebase" on page 96, taking care to specify the Anderel data sets:

```
XMLLoader persist Anderel
```

7. Optionally, you can:
 - a. Modify the EmailSenderName element.
 - b. Modify the ManufacturerName element.
8. Start the partner servlet container.
9. On your enterprise server, create a partner profile for Anderel as a Distributor, and set its Message URL to:

`http://<partner_machine:port>/Comergent/msg/anderel`
10. Create an indirect commerce partner, one of whose distributors is Anderel. Log in as a partner user who belongs to this partner and verify that you can perform price and availability requests and shopping cart transfer requests against Anderel.

Creating and Populating the Knowledgebase

This chapter describes how you create the Knowledgebase using the standard Comergent eBusiness System schema. You must run the schema creation and data scripts to create and populate the Knowledgebase in your designated database server.

These steps enable you to test that the installation of the Comergent eBusiness System has been successful. By the end of this chapter you will be able to log in to the Comergent eBusiness System and verify that the basic functionality works.

If you are upgrading your installation of the Comergent eBusiness System from an earlier release, then you can migrate the data to a Release 7.0.2 Knowledgebase. See "Data Migration" on page 104 for more information.

The chapter, CHAPTER 8, "Customizing your Comergent eBusiness System", shows you how to customize the Comergent eBusiness System and meet the needs of your implementation.

Gathering the Database Information

Identify the connection information for the database you are using. This includes:

1. Identify the connection information required to connect from the Comergent eBusiness System machine to the database server.

- For a DB2 Server, this is the catalog name of the database server. You must create a catalog entry for the target DB2 database on the Comergent eBusiness System machine. You can use the following DB2 commands to create a catalog entry:

```
db2 CATALOG TCPIP NODE <node name> REMOTE  
    <ip address of server> SERVER <port number>
```

```
db2 CATALOG DATABASE <catalog name> AT NODE  
    <node name> AUTHENTICATION SERVER
```

- For an Oracle Server, this is the machine name or IP address of the database server, the port at which the database server is listening, and the SID (name of the database instance) of the database server. You must create a TNS alias for the database server on the Comergent eBusiness System machine.
 - For a SQL Server, this is the machine name or IP address of the database server.
2. Establish a database userid on the database server which is used by the Comergent eBusiness System.

Use this userid to perform all the Comergent eBusiness System-related calls to the database. This userid must have sufficient privileges to create and modify database tables.

You may use one of your existing database userids. However, we suggest that you set up a database userid that is dedicated to Comergent eBusiness System-related tasks.

3. Check that you can connect to the database server using the userid and connection information:
 - For DB2, you must be able to connect using the catalog entry for the database server.
 - For Oracle, you must be able to connect from the Comergent eBusiness System machine to the database server using SQL*Plus and the TNS alias.
 - For SQL Server, you must be able to connect using OSQL and the ODBC data source name and userid.

Creating the Knowledgebase Schema

You run the schema creation script to create the Knowledgebase in your designated database server. You can run the schema creation script as a batch file as described

in this section or from the SDK. See "To Run the Schema Creation Script with the SDK" on page 95.

Attention: Running the schema creation scripts directly is no longer supported. You must run the createDB target as described in "Installing the Comergent eBusiness System" on page 37.

Before using the schema creation scripts and XML Loader scripts, you must decide what locales your implementation will support. See CHAPTER 10, "Internationalization" for more information about supporting locales and see "Internationalization and Support for Locales" on page 99 for information about the locales created with the default scripts. You should remove any locales from the scripts that you do *not* intend to support. To begin with, you can try just creating the "en_US" locale and adding more as the implementation progresses.

Creating the Schema

Attention: To run the database schema creation target, you must have the correct database client software installed: SQLPLUS for an Oracle server installation, OSQL for Microsoft SQL Server, and DB2 for IBM DB2.
--

The schema creation script is a batch file that connects to the database server and then runs a sequence of SQL scripts to create the database objects.

- If you are running against an IBM DB2 Universal Database database server, then run **DB2CreateSchema.bat** from the *debs_home/Comergent/* directory.

In each SQL file, edit the Connect command to use the catalog entry set up to connect to the DB2 Server:

```
connect to <catalog name>
```

or

```
connect to <catalog name> user <database username> using  
<database password>
```

- If you are running against an Oracle Server database server, then run one of the following scripts from the *debs_home/Comergent/* directory:
 - **OracleCreateSchema.bat** (for Windows)

- **OracleCreateSchema.sh** (for UNIX)

By default, the Oracle schema creation script creates indexes for tables in a separate tablespace called **INDX**. You can choose to create the indexes in the same tablespace as the main schema or in a tablespace of your choice. To do either of these two choices, you must edit the **oracle_indexes.sql** SQL script.

- If you are running against a Microsoft SQL Server database server, then run **MssqlCreateSchema.bat** from the *debs_home/Comergent/* directory. Make sure the database is the default database for the userid you use.

Locales and Loading Data Using the XML Loader

The current schema creation script creates seven locales as part of the table creation script. You should review this part of the table creation script and modify it to remove locales if need be before running the script. If you want to add locales, then follow the instructions provided in CHAPTER 10, "Internationalization".

For each locale, you must take care to ensure that the correct value in the **DB_SORT_LOCALE_NAME** column of the **CMGT_LOCALE** table is set. The following table summarizes the most frequently used values for this column:

TABLE 9. Database Sorting Settings

Database	Locale	Value
Oracle	en_US	BINARY
	de_DE	XGERMAN
	fr_FR	XFRENCH
	fr_CH	BINARY
	de_CH	BINARY
	ja_JP	BINARY
	zh_TW	BINARY

TABLE 9. Database Sorting Settings (Continued)

Database	Locale	Value
SQL Server	en_US	Latin1_General_BIN
	de_DE	FRENCH_CS_AS
	fr_FR	FRENCH_CS_AS
	fr_CH	SQL_Latin1_General_CP1_CI_AS
	de_CH	SQL_Latin1_General_CP1_CI_AS
	ja_JP	SQL_Latin1_General_CP1_CI_AS
	zh_TW	Chinese_Taiwan_Stroke_CS_AS

For other locales, please contact your Comergent Support representative for further information. DB2 does not require these settings: the database sort order is set at the database level and cannot be changed.

To Run the Schema Creation Script with the SDK

As an alternative to running the schema creation scripts as batch files, you can also run the schema creation script from within the SDK as follows:

- Edit the appropriate SDK project ***.properties** file to enter the connection information used by the createDB target. Typically, during an implementation cycle, this is the **project_dev.properties** file to be found in the **sdk_home/projects/project/templates/** directory.
 - To create the Knowledgebase on an Oracle database server, enter:

```
DB_TYPE=Oracle
ORACLE_URL=jdbc:oracle:thin:@<Machine>:<Port>:<SID>
ORACLE_USERNAME=<Username>
ORACLE_PASSWORD=<Password>
ORACLE_DATABASE=<TNS alias>
```
 - To run the Knowledgebase on SQL Server, enter:

```
ODBC_URL=<ODBC DSN>
ODBC_USERNAME=<Username>
ODBC_PASSWORD=<Password>
```
- If you have deployed the Comergent eBusiness System in WebSphere, then you must edit the classpath setting portion of the script to allow for the fact that the class and library files are in the **debs_home/Comergent/servlets/** directory.
- Check that the appropriate database client software has been installed on your machine and that it is in your path. For example, if you are using an Oracle server for the Knowledgebase, then make sure that SQLPLUS is in your path.

Make sure also that the **tnsnames.ora** file includes an alias as specified as the ORACLE_DATABASE parameter. You should be able to successfully run:

```
tnsping <TNS alias>
```

4. Run the createDB target from the SDK.
5. Check the generated log files to verify that the script ran without error.

Populating the Knowledgebase

Having created the Knowledgebase, you need to load data into it, in order to run the Comergent eBusiness System. Release 7.0.2 loads data into the Knowledgebase using a set of XML definitions of each data object. Data loading is invoked from the SDK using the loadDB and loadMatrixDB targets: these load the minimal and reference data sets respectively. These targets invoke the XMLLoader scripts as described in "XMLLoader Script" on page 97.

XML Data Format

The data to be loaded using the XMLLoader scripts must be created in the form of XML elements: one for each data object. The form of the XML elements closely matches the structure of the data object: The name of the top-level element is the name of the data object and each child element corresponds to a data field or child data object of the data object.

The top-level element has these attributes:

- A state attribute: set this value to "INSERTED" when you are creating new data. You can use the value "MODIFIED" if you are modifying an existing data object using the XML data loader.
- A type attribute: set this value to "BusinessObject".

You can use a list data object to act as a container for a list of data objects to be loaded. You must provide a value for each element that is declared as mandatory in the data object definition.

The XMLLoader script essentially sets a classpath and then invokes an XMLLoader class, passing it parameters for the location of the **Comergent.xml** file, the operation (usually "persist"), the partner name (usually "matrix"), and a list of one or more files of data to be loaded.

The files must be in one of two forms:

- Either a set of XML elements: the root element must be named *DataObjectData*. For example:


```
<PromotionData>
  <!--Record 1 ----->
  <Promotion state="INSERTED" type="BusinessObject">
    <PromotionKey state="INSERTED">126</PromotionKey>
    <PromoCode state="INSERTED">ID 360</PromoCode>
    <PromotionName state="INSERTED">Packages</PromotionName>
    ...
  </Promotion>
  <!--Record 2 ----->
  <Promotion state="INSERTED" type="BusinessObject">
    <PromotionKey state="INSERTED">127</PromotionKey>
    <PromoCode state="INSERTED">ID 3837</PromoCode>
    ...
  </Promotion>
  ...
</PromotionData>
```

- Or each file can point to a list of files:

```
WEB-INF/xmldata/ProductCategoryList
WEB-INF/xmldata/ProductList
...
```

By convention, the files that provide lists of other files have the suffix “lst”.

XMLLoader Script

The XML data loading script invokes a Java class that uses the Comergent eBusiness System DataManager to load each object.

The script is called **XMLLoader.bat** (or **XMLLoader.sh** on UNIX systems) and it is located in *debs_home/Comergent/WEB-INF/scripts/*. The Comergent eBusiness System provides two sets of data that can be loaded: see "Data Sets" on page 101 for further information.

Encryption

You can choose to encrypt sensitive data fields so that data stored in the Knowledgebase does not store the data in plain text. Typically, you use this mechanism for fields such as user passwords and credit card numbers, but any field can be encrypted provided that its corresponding database column can store strings.

Attention: You *must* determine which fields are to be encrypted before loading any data into the Knowledgebase. See "Storing Data in Encrypted Form" on page 173 for more information.

When data is encrypted, a special file called **dcmsKey.ser** is created. You must ensure that this file is stored safely. If it is deleted or moved, then the encrypted data

cannot be recovered. Note that you cannot export and re-import data that has encrypted fields. The encrypted fields will be garbled if you attempt to do this.

Defining the Knowledgebase as the Data Source

To run the data loading script, you must configure the Comergent eBusiness System to access the Knowledgebase. You do this using the configuration files **prefs.xml**, and **DataServices.xml**. You must also ensure that the DsKeyGenerators element of the **DataServices.xml** file points to the correct key generator file:

DB2KeyGenerators.xml, **MsSqlKeyGenerators.xml**, or

OracleKeyGenerators.xml. Note that if you use the SDK to install the Comergent eBusiness System, then the correct values will be set up automatically in these files.

Attention: Please read the database server-specific instructions below. Set the logging level to INFO before running the data loading script.

The following sections provide a brief description of the syntax of the **DataSources.xml** file for the supported database servers.

DB2DataSources Syntax

```
<Primary DataService="JdbcService" SubType="DB2"
  ConnectionString="jdbc:db2://DB2_MACHINE:DB2JD_PORT/DATABASE"
  UserId="DB2_OS_USER" Password="DB2_OS_PASSWORD"/>
```

- DB2_MACHINE is the machine name or IP address of the machine on which DB2 is running.
- DB2JD_PORT is the port at which the JDBC listener is listening.
- DB2_OS_USER and DB2_OS_PASSWORD are the userid used to create the Comergent eBusiness System schema.

MsSqlDataSources Syntax

```
<Primary DataService="MsSqlService" SubType="MS"
  ConnectionString="MSSQL_MACHINE"
  UserId="MSSQL_USERNAME" Password="MSSQL_PASSWORD" />
```

- MSSQL_MACHINE is the machine name or IP address of the machine on which SQL Server is running.
- MSSQL_USERNAME and MSSQL_PASSWORD are the username and password used to create the Comergent eBusiness System schema. Note that the default database for this user must be the database in which the schema was created.

OracleDataSources Syntax

You can use either the OCI JDBC driver or the Oracle thin client JDBC driver to connect from the Comergent eBusiness System machine to the Oracle Server. Use:

- For Oracle 8i:

```
<Primary DataService="JdbcService" SubType="ORACLE"
  ConnectionString="jdbc:oracle:oci8:@ALIAS"
  UserId="ORACLE_USERNAME" Password="ORACLE_PASSWORD" />
```

- For Oracle 9i:

```
<Primary DataService="JdbcService" SubType="ORACLE"
  ConnectionString="jdbc:oracle:oci:@ALIAS"
  UserId="ORACLE_USERNAME" Password="ORACLE_PASSWORD" />
```

or

```
<Primary DataService="JdbcService" SubType="ORACLE"
ConnectionString="jdbc:oracle:thin:@ORACLE_MACHINE:ORACLE_PORT:SID"
  UserId="ORACLE_USERNAME" Password="ORACLE_USERNAME" />
```

- ALIAS is the TNSNAMES alias set up on the Comergent eBusiness System machine.
- ORACLE_USERNAME and ORACLE_PASSWORD are the userid used to create the Comergent eBusiness System schema.
- ORACLE_MACHINE is the machine name or IP address of the machine on which the Oracle Server is running.
- ORACLE_PORT is the port number at which the Oracle Server listener is listening for connections.
- SID is the Oracle SID of the database.

Internationalization and Support for Locales

Creating Locales

You must edit the file **LocaleDataList** (located in *debs_home/Comergent/WEB-INF/xmldata/*) to specify the locales that you want the Knowledgebase to support. Each installation of the Comergent eBusiness System can support one or more locales.

Make sure that the server locale (defined by the defaultSystemLocale element of the **Internationalization.xml** file) is included in the list of locales defined in **LocaleDataList**.

See CHAPTER 10, "Internationalization" for more information about creating and adding locales.

Updating Data using XMLLoader

When you load locale-specific data into the Knowledgebase, you can make use of the XMLLoader's ability to modify data objects. In each data object element and child elements, set the state attribute to "Modified". This will update business objects rather than inserting a new business object.

This feature is particularly useful when you are adding locale-specific information to an existing implementation of the Comergent eBusiness System. For example, the following data object can be used to update a product category business object:

```
<ProductCategory state="MODIFIED">
  <ProductCategoryKey state="MODIFIED">1002</ProductCategoryKey>
  <ParentCategoryKey state="MODIFIED">-1</ParentCategoryKey>
  <SequenceId state="MODIFIED">5</SequenceId>
  <ResourceKey state="MODIFIED">3</ResourceKey>
  <StartDate state="MODIFIED">2000-10-06 17:20:28.0</StartDate>
  <EndDate state="MODIFIED">2100-10-06 17:20:28.0</EndDate>
  <OwnedBy state="MODIFIED">1</OwnedBy>
  <AccessKey state="MODIFIED">2006</AccessKey>
  <ProductCategoryLocale state="MODIFIED">
    <Locale state="MODIFIED">de_DE</Locale>
    <Name state="MODIFIED">Software</Name>
    <Description state="MODIFIED">
      Alle Anwendungspakete, die auf unserer Site vorhanden
      sind, werden auf allen unsere Qualitätscomputersysteme geprüft und
      bestätigt.
    </Description>
  </ProductCategoryLocale>
</ProductCategory>
```

Database Server-Specific Steps

When running the data loading scripts, the steps vary a little from one database server to another. This section covers the supported database servers.

DB2 Server Steps

1. When running the **XMLLoader.bat** script, the DB2 server must be running the DB2 JDBC listener. Start this listener by entering at the command line:


```
>db2jd <port number>
```
2. Edit the **DataServices.xml** file to specify the **DB2DataSources.xml** file and **DB2KeyGenerators.xml** file. You must also make sure that both **JdbcDriver1** and **JdbcDriver2** elements are not commented out.

3. In **DB2DataSources.xml**, make sure that the connection information sets the port number used in Step 1. Make sure that the same UserId and Password as were used to create the schema.
4. For performance reasons, after you have run the data loading scripts, you must perform the following steps to ensure that the indexes are used correctly:

- a. Generate a list of the schema tables:

```
>db2 list tables
```

- b. Create and run a script that invokes the REORG command on each table:

```
REORG table <schema_name>.<table_name>
```

- c. Create and run a script that invokes the RUNSTATS command on each table:

```
RUNSTATS on table <schema_name>.<table_name> with distribution and  
indexes all
```

SQL Server Steps

1. If you are using MS SQL Server as your database server, then make sure that you have copied the **MsSqlJNI.dll** file to the **Winnt\system32** directory on the Comergent eBusiness System machine.
2. Edit the **DataServices.xml** file so that all the JdbcDriver elements are commented out. Use the `<!--` and `-->` tags to comment out each element.
3. In **MsSqlDataSources.xml**, make sure that the connection information sets the same UserId and Password as were used to create the schema.

Oracle Steps

1. Edit the **DataServices.xml** file to specify the **OracleDataSources.xml** file and **OracleKeyGenerators.xml** file.
2. Make sure that the JdbcDriver1 element takes the value of the name of the Oracle JDBC driver.

Data Sets

The Comergent eBusiness System provides two sets of XML data objects:

- Reference implementation: this set populates the Knowledgebase with the complete reference implementation (Matrix Solutions) data set. You use this set if you want to deploy our reference implementation in order to familiarize yourself with the Comergent eBusiness System.

- Minimal implementation: this set populates the Knowledgebase with the minimal data required to get the Comergent eBusiness System up and running. You use this set when you want to deploy your production system using your data. See "Email Addresses" on page 49 for information about email addresses set in the minimal data set.

Attention: You must always install the minimal data set: you can optionally layer the reference data on top. Use the SDK loadDB target to load the minimal data only; use the loadMatrixDB target to load both.
--

To Edit and Run the XML Data Loading Script

1. Configure the **Comergent.xml**, **DataService.xml**, and appropriate **DataSources.xml** configuration files to point to the database server to be used for the Knowledgebase.
 - a. Make sure that the DataService element of the **Comergent.xml** file points to the correct location of the **DataService.xml** file.
 - b. Make sure that the DsDataSources element of the DataService.xml file points to the correct location of your **DataSources.xml** file.
 - c. Make sure that the appropriate connection information has been entered in the **DataSources.xml** file.
2. If your environment does not have a JAVA_HOME environment variable set, then edit the **XMLLoader.bat** to set the JAVA_HOME environment variable to point to your installation of the JDK. For example:

```
>set JAVA_HOME=C:\JDK1.2.2
```

If you are using either DB2 or Oracle as the database server, then make sure that the classpath is set to include the location of the appropriate JDBC driver class. Typically, you must ensure that the XMLLoader script includes a line of the form:

```
CP=%CP%;%DH%\lib\oracle816_jdbc2.jar
```

or

```
CP=%CP%;%DH%\lib\db2runtime71.jar
```

If you have deployed the Comergent eBusiness System in WebSphere, then you must edit the classpath setting portion of the script to allow for the fact that the class and library files are in the **debs_home/Comergent/servlets/** directory.

3. Save the edited file to **debs_home/Comergent/**.

4. Run the XML data loading script from *debs_home/Comerгент/*.

- The syntax to load the reference data is:

```
>XMLLoader persist
```

- The syntax to load the minimal data is:

```
>XMLLoader persist minimal
```

See CHAPTER 8, "Customizing your Comerгент eBusiness System" for further information relating to the configuration files. In addition, the *Comerгент eBusiness System Reference Guide* provides a complete description of the Knowledgebase.

Removing Locales

Out of the box, the schema creation scripts and the minimal and reference data sets create data for several locales. Before going live with your implementation, you should remove from the Knowledgebase any locales not supported by your implementation.

To remove a locale, you must remove references to it from the following tables:

- CMGT_ANALYZER_TEXT: for example

```
DELETE FROM CMGT_ANALYZER_TEXT WHERE LOCALE = 'de_DE';
```

- CMGT_CURRENCIES: for example

```
DELETE FROM CMGT_CURRENCIES WHERE LOCALE = 'de_DE';
```

- CMGT_LOCALE: for example

```
DELETE FROM CMGT_LOCALE WHERE LOCALE_NAME = 'de_DE';
```

- CMGT_LOCALE_CURRENCY: for example

```
DELETE FROM CMGT_LOCALE_CURRENCY WHERE LOCALE_NAME = 'de_DE';
```

- CMGT_LOCALE_NAMES: for example

```
DELETE FROM CMGT_LOCALE_NAMES WHERE LOCALE_NAME = 'de_DE';  
DELETE FROM CMGT_LOCALE_NAMES WHERE EFFECTIVE_LOCALE = 'de_DE';
```

- CMGT_LOOKUPS: for example

```
DELETE FROM CMGT_LOOKUPS WHERE LOCALE = 'de_DE';
```

- CMGT_<OBJECT>_LOCALE: there are multiple tables that store locale-specific strings for data objects such as products, features, and so on. You must remove the references to the deleted locale from each such table. For example

```
DELETE FROM CMGT__<OBJECT>_LOCALE WHERE LOCALE_NAME = 'de_DE';
```

Logging into the Comergent eBusiness System

Point your browser to the standard login page. The standard URL to access this page is:

`http://<server>:<port>/Comergent/enterpriseMgr/matrix`

Irrespective of whether you have generated the reference data set or minimal data set, you can log in as the enterprise administrator whose username and password are “admin” and “admin”.

You can now administer the Comergent eBusiness System through the standard browser interface. See the *Comergent eBusiness System Administration Guide* for further details.

<p>Attention: Before going live with your implementation of the Comergent eBusiness System, you <i>must</i> change the passwords of the admin and ERPAdmin users. Failure to do so presents a security breach.</p> <p>Do not use the ERPAdmin user for administration tasks. It is intended only for integration with an ERP system. You should not use this user to log in to the system through the Web. See CHAPTER 20, "Implementing Order Management Integration" for more information.</p>

When you have successfully completed your installation, proceed to the next chapter. Otherwise, use CHAPTER 7, "Troubleshooting and Backing Up the Comergent eBusiness System" to troubleshoot your installation.

Data Migration

This section describes how to migrate data from earlier releases of the Comergent eBusiness System. Depending on your current release, you should follow the instructions to upgrade from one release to the next until you reach Release 6.0.

- "Releases 5.0 and 5.1.x to Release 5.5" on page 106
- "Release 5.5 to Release 5.5.3" on page 107
- "Release 5.5.1 to Release 5.5.3" on page 108
- "Release 5.5.3 to Release 5.6" on page 108
- "Release 5.6 to Release 5.6.2" on page 109

- "Release 5.6.2 to Release 6.0" on page 109
- "Release 6.0 to Release 6.3" on page 114
- "Release 6.3 to Release 6.4.1" on page 114
- "Release 6.4.1 to Release 6.7" on page 114

General

Before starting any data migration, make sure that you back up your current Knowledgebase database schema and verify that you can recover your existing implementation from this backup.

Attention: Do not attempt any data migration before backing up your current implementation.
--

The migration scripts are written to fix the partner key and group key of the enterprise partner as "1". If in your data set, you use "1" for either the partner key or group key of a different partner, then you must manually change this partner by updating the partner and/or group key to an unused value. In doing so, bear in mind that the group key and partner key are used to reflect relationships such as the assignment of price lists to partners and in ACLs, and these must all be changed for the existing partner before running the migration scripts. These uses include:

- users belong to a partner through the
CMGT_USER_CONTACTS.PARTNER_KEY column
- users belong to groups through the
CMGT_GROUP_USERS.GROUP_KEY column
- inquiry lists belong to partners through the
CMGT_CARTS.PARTNER_KEY column
- price lists are assigned to partners through the
CMGT_USER_PRICELIST.PARTNER_KEY column
- ACLs refer to specific groups using the
CMGT_ACCESSLIST.GROUP_KEY column

Before running any of the migration scripts, you must identify an enterprise user in your existing implementation whose user key can be used to populate the OWNED_BY columns of the new tables and objects. For example, if you have not deleted the admin user created by the minimal data set, then you can use that user key.

You must replace all occurrences of the string “YOUR_ENTERPRISE_USER” with this value in all of the SQL scripts used in your migration effort. These are:

***debs_home/Comergent/WEB-INF/sql/Oracle/migration/
DEBS_5.6.2_to_DEBS_6.0/mig_oracle_alter_tables.sql***

***debs_home/Comergent/WEB-INF/sql/MsSql/migration/
DEBS_5.6.2_to_DEBS_6.0/mig_mssql_alter_tables.sql***

***debs_home/Comergent/WEB-INF/xmldata/Migration/
DEBS_5.6.2_to_DEBS_6.0/oracle_update_existing_data.sql***

***debs_home/Comergent/xmldata/Migration/DEBS_5.6.2_to_DEBS_6.0/
ms_sql_update_existing_data.sql***

***debs_home/Comergent/WEB-INF/sql/Oracle/migration/
DEBS_5.1.3_to_DEBS_5.5/mig_oracle_modify_data.sql***

***debs_home/Comergent/WEB-INF/sql/MsSql/migration/
DEBS_5.1.3_to_DEBS_5.5/mig_mssql_modify_data.sql***

Releases 5.0 and 5.1.x to Release 5.5

Oracle

1. From ***debs_home/Comergent/WEB-INF/sql/Oracle/migration/
DEBS_5.1.3_to_DEBS_5.5/***, run ***mig_oracle_manage_first.bat***.
2. Check the log file: ***mig_oracle_first.log***.
3. Using the XMLImpExp script, add new data as follows:
 - a. Copy ***debs_home/Comergent/WEB-INF/scripts/XMLImpExp.bat*** to ***debs_home/Comergent/***.
 - b. Point ***OracleDataSources.xml*** in ***debs_home/Comergent/WEB-INF/
schema/*** to the migrated database.
 - c. In a console window, navigate to ***debs_home/Comergent/*** and give following command:

```
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5.1.3_to_DEBS_5.5 ACL  
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5.1.3_to_DEBS_5.5 ModelGroupsAndModelsList
```

4. From ***debs_home/Comergent/WEB-INF/sql/Oracle/migration/
DEBS_5.1.3_to_DEBS_5.5/***, run ***mig_oracle_manage_second.bat***.

5. Check the log file: **mig_oracle_second.log**.

Microsoft SQL Server

1. From **debs_home/Comergent/WEB-INF/sql/MSSql/migration/DEBS_5.1.3_to_DEBS_5.5**, run **mig_mssql_manage_first.bat**.
2. Check the log files.
3. Using the XMLImpExp script, add new data as follows:
 - a. Copy **debs_home/Comergent/WEB-INF/scripts/XMLImpExp.bat** to **debs_home/Comergent/**.
 - b. Point **MsSqlDataSources.xml** in **debs_home/Comergent/WEB-INF/schema/** to the migrated database.
 - c. In a console window, navigate to **debs_home/Comergent/** and run the following commands:

```
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5.1.3_to_DEBS_5.5 ACL  
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5.1.3_to_DEBS_5.5 ModelGroupsAndModelsList
```

4. From **debs_home/Comergent/WEB-INF/sql/MSSql/migration/DEBS_5.1.3_to_DEBS_5.5/**, run **mig_mssql_manage_second.bat**.
5. Check the log files.

Release 5.5 to Release 5.5.3

Oracle

1. From **debs_home/Comergent/WEB-INF/sql/Oracle/migration/DEBS_5_5_to_DEBS_5_5_3**, run **migrate.bat**.
2. Check the log file: **migration.log**.

The section after 'About to execute verify_lookup_columns_values.sql' and before 'About to execute alter_to_not_null.sql' will show you which string values did not get associated lookup_code for them. If any rows are reported, then investigate why the corresponding lookup values do not exist in the corresponding lookup table and either make entries to them or change the string values.

Microsoft SQL Server

1. From *debs_home/Comergent/WEB-INF/sql/MsSql/migration/DEBS_5_5_to_DEBS_5_5_3*, run *mssql_migrate.bat*.
2. Check the log files.

Release 5.5.1 to Release 5.5.3

Using your preferred SQL client, run the following SQL fragment against your Knowledgebase:

```
ALTER TABLE CMGT_LOCALE add DB_LOCALE_LANG_NAME varchar2(50) default 'AMERICAN';
```

Release 5.5.3 to Release 5.6

Oracle

1. From *debs_home/Comergent/WEB-INF/sql/Oracle/migration/DEBS_5_5_3_to_DEBS_5_6*, run *mig_kl.bat*.
2. Check the log file: *mig_kl.log*.
3. Review and make a note of *mig_known_dif.txt*.
4. Using the XMLImpExp script, add new data as follows:
 - a. Copy *debs_home/Comergent/WEB-INF/scripts/XMLImpExp.bat* (or *XMLImpExp.sh*) to *debs_home/Comergent/*.
 - b. Point *OracleDataSources.xml* in *debs_home/Comergent/WEB-INF/schema/* to the migrated database.
 - c. In a console window, navigate to *debs_home/Comergent/* and run the following commands:

```
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5_5_3_to_DEBS_5_6 ACL  
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5_5_3_to_DEBS_5_6 LightweightLookupList
```

Microsoft SQL Server

1. From *debs_home/Comergent/WEB-INF/sql/MSSql/migration/DEBS_5_5_3_to_DEBS_5_6/*, run *mig_kl.bat*.
2. Check the log files.

3. Review and make a note of *debs_home/Comergent/WEB-INF/sql/Oracle/migration/DEBS_5_5_3_to_DEBS_5_6/mig_known_dif.txt*.
4. Using the XMLImpExp script, add new data as follows:
 - a. Copy *debs_home/Comergent/WEB-INF/scripts/XMLImpExp.bat* to *debs_home/Comergent/*.
 - b. Point *MsSqlDataSources.xml* in *debs_home/Comergent/WEB-INF/schema/* to the migrated database.
 - c. In a command window, go to *debs_home/Comergent/* and run the following commands:

```
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5_5_3_to_DEBS_5_6 ACL  
XMLImpExp persist ./WEB-INF/xmldata/Migration/  
DEBS_5_5_3_to_DEBS_5_6 LightWeightLookupList
```

Release 5.6 to Release 5.6.2

Oracle

1. From *debs_home/Comergent/WEB-INF/sql/Oracle/migration/DEBS_5_6_to_DEBS_5_6_2/*, run *migrate.bat*.
2. Check the *migrate.log* file.

Microsoft SQL Server

1. From *debs_home/Comergent/WEB-INF/sql/MsSql/migration/DEBS_5_6_to_DEBS_5_6_2/*, run *migrate.bat*.
2. Check the *migrateAll.log* file.

Release 5.6.2 to Release 6.0

Oracle

1. From *debs_home/Comergent/WEB-INF/sql/Oracle/migration/DEBS_5.6.2_to_DEBS_6.0/*, run *mig_oracle_manage.bat*.
2. Check the log file: *mig_oracle.log*.
3. Modify existing data as follows:
 - a. Navigate to *debs_home/Comergent/WEB-INF/xmldata/Migration/DEBS_5.6.2_to_DEBS_6.0/*.

- ```
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 LightweightLookupList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 DSAnalyzerTextList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 DSAnalyzerPropsList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS 5.6.2 to DEBS 6.0 ACL
```

```
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2 to DEBS_6.0 CronConfigList
```

- ```

Choose DBMS Type
-----
1> Oracle          2> MsSql

Mark you choice number:1
Enter working directory Location : {Directory where the Input file
is}
That would be by default: %debs_home%\WEB-INF\sql\Oracle\migra-
tion\tools\scripts

Enter Inputfile Name : {Input File Name Acl.xml }
Enter output directory Location : {Directory where you should pro-

```

```
duce the output}
Enter database Machine Name : { database machine name }
Enter database user Name : { database user name }
Enter database password : {database password }
Enter database SID : { database sid }
```

This will take the file **Acl.xml** as input and produce **DsAccess** file.

6. Run:

```
debs_home/Comergent/WEB-INF/scripts/XmlImpExp persist inputDirectory DsAccess
```

where the *inputDirectory* parameter is the directory where **DsAccess** is located.

Note: make sure your **DataServices.xml** is pointing to the correct datasources file and that **OracleDataSources.xml** is pointing to the right database.

7. Execute this SQL statement against the database:

```
ALTER TABLE CMGT_SKU_MAPPING MODIFY (OWNED_BY NUMBER(20) NOT NULL);
```

Microsoft SQL Server

1. From **debs_home/Comergent/WEB-INF/sql/MsSql/migration/DEBS_5.6.2_to_DEBS_6.0/**, run **mig_mssql_manage.bat**.
2. Check the log files.
3. Modify the constraints by reading the **how_to_modify_constraint.txt** file and follow instructions from this file to modify the constraints.
4. Modify existing data as follows:
 - a. In **debs_home/Comergent/WEB-INF/xmldata/migration/DEBS_5.6.2_to_DEBS_6.0/**, point **mssql_update_existing_data.bat** to the migrated database and run it.
 - b. Check log file: **mssql_update_existing_data.log**.
5. Using the XMLImpExp script, add new data as follows:
 - a. Copy **debs_home/Comergent/WEB-INF/scripts XMLImpExp.bat** to **debs_home/Comergent/**.
 - b. Point **MsSqlDataSources.xml** in **debs_home/Comergent/WEB-INF/schema/** to the migrated database.

- c. In a command window, navigate to **debs_home/Comergent/** and run the following commands:

```
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 LightweightLookupList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 DSAnalyzerTextList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 DSAnalyzerPropsList
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 ACL
```

If the cache cleanup cron job does not exist in your implementation, then also run:

```
XMLImpExp persist ./WEB-INF/xmldata/-
Migration/DEBS_5.6.2_to_DEBS_6.0 CronConfigList
```

6. Create new access lists for existing ACLs as follows:

- a. Go to **debs_home/Comergent/WEB-INF/sql/Oracle/migration/tools/scripts/**.
- b. Run **PopulateAclFile.bat** and respond the questions about the database location, username, password as follows:

```
Choose DBMS Type
-----
1> Oracle          2> MsSql

Mark you choice number:1
Enter working directory Location : {Directory where the Input file
is}
That would be by default: %debs_home%\WEB-INF\sql\Oracle\migra-
tion\tools\scripts

Enter Inputfile Name : {Input File Name Acl.xml }
Enter output directory Location :{Directory where you should pro-
duce the output}
Enter database Machine Name : { database machine name }
Enter database user Name : { database user name }
Enter database password :{database password }
Enter database SID : { database sid }
```

This will take file **Acl.xml** as input and product **DsAccess** file.

7. Run:

```
debs_home/Comergent/WEB-INF/scripts/XmlImpExp persist inputDirec-
```


tory DsAccess

where the *inputDirectory* parameter is the directory where DsAccess is stored.

8. Execute this SQL statement against the database:

```
ALTER TABLE CMGT_SKU_MAPPING ALTER COLUMN OWNED_BY NUMERIC(20) NOT
NULL
GO
```

Migrating Orders Data

You must also migrate your orders data from the CMGT_ORDERS table to the new CMGT_OIL and CMGT_ORDER_EXTN tables as follows:

1. Run:

```
INSERT INTO CMGT_OIL (CART_KEY,OWNED_BY, ACCESS_KEY,
ACTIVE_FLAG,DELIVERY_DATE, REQUESTED_DATE, SHIPPED_DATE,
TOTAL_NUMBER_ITEMS, CURRENCY_CODE,CURRENCY_KEY, CONTACT_REF_NUMBER,
SHIP_COMPLETE, TAXABLE, PAYMENT_TYPE,CREDIT_CARD_TYPE,
CREDIT_CARD_HOLDER, PAYMENT_EXPIRATION_DATE, PAYMENT_NUMBER,
SHIPPING_METHOD_CODE, SHIPPED_STATUS,SHIP_TYPE_FLAG, LAST_NAME,
FIRST_NAME, EMAIL_ADDRESS, PHONE_NUMBER, ENCRYPTION_SEED,
ERP_MESSAGE, VERTICAL_KEY,MEMO, CART_NAME, CART_STATUS_CODE,
PARTNER_KEY,CONTACT_KEY,TOTAL, ROUTE_STATUS_CODE, ROUTE_USER_KEY,
ROUTE_NOTES, ROUTE_FROM_USER_KEY, ROUTE_DATE,MEMBER_LEVEL,
CUSTOMER_TYPE_CODE, SELLER_KEY, PO_NUMBER, OIL_TYPE,
UPDATE_DATE,UPDATED_BY,CREATION_DATE,CREATED_BY)
SELECT CART_KEY, OWNED_BY, ACCESS_KEY, ACTIVE_FLAG, DELIVERY_DATE,
REQUESTED_DATE, SHIPPED_DATE,TOTAL_NUMBER_ITEMS, CURRENCY_CODE,
CURRENCY_KEY, CONTACT_REF_NUMBER, SHIP_COMPLETE, TAXABLE,
PAYMENT_TYPE, CREDIT_CARD_TYPE, CREDIT_CARD_HOLDER,
PAYMENT_EXPIRATION_DATE, PAYMENT_NUMBER, SHIPPING_METHOD_CODE,
SHIPPED_STATUS, SHIP_TYPE_FLAG, LAST_NAME, FIRST_NAME, EMAIL_ADDRESS,
PHONE_NUMBER, ENCRYPTION_SEED, ERP_MESSAGE, VERTICAL_KEY, MEMO,
CART_NAME, CART_STATUS_CODE, PARTNER_KEY, CONTACT_KEY, TOTAL,
ROUTE_STATUS_CODE, ROUTE_USER_KEY, ROUTE_NOTES, ROUTE_FROM_USER_KEY,
ROUTE_DATE, MEMBER_LEVEL, CUSTOMER_TYPE_CODE, 1, PO_NUMBER, 2,
UPDATE_DATE, UPDATED_BY, CREATION_DATE, CREATED_BY FROM CMGT_ORDERS;
```

2. Run:

```
INSERT INTO CMGT_ORDER_EXTN (CART_KEY, ORDER_REF_NUMBER,
INTEGRATION_STATUS, ORDER_DATE, ORDER_KEY, ORDER_STATUS, PO_NUMBER,
PARTNER_LEVEL_CODE, PARTNER_REF_NUMBER, SHIPPING_CHARGES, TAX,
TOTAL_AMOUNT, ACTIVE_FLAG)
SELECT CART_KEY, ORDER_REF_NUMBER, INTEGRATION_STATUS, ORDER_DATE,
ORDER_KEY, ORDER_STATUS, PO_NUMBER, PARTNER_LEVEL_CODE,
PARTNER_REF_NUMBER, SHIPPING_CHARGES, TAX, TOTAL_AMOUNT, ACTIVE_FLAG
```

```
FROM CMGT_ORDERS WHERE ORDER_STATUS != 20;
```

3. Run:

```
INSERT INTO CMGT_OIL_LI (CART_LINE_KEY, CART_KEY, DELIVERY_DATE, SKU,
DESCRIPTION, SKU_AUTHORITY, TOTAL_AMOUNT, SHIPPING_METHOD_CODE,
SHIPPING_CHARGES, SHIPPED_STATUS, QUANTITY, UNIT_OF_MEASURE_CODE,
CONFIG_FLAG, PARENT_KEY, CONFIG_CONTAINER, LIST_PRICE, MEMO,
ACTIVE_FLAG, CONFIG_ID, REQUESTED_DATE, SHIP_COMPLETE, RETURN_CODE,
RETURN_STATUS, RETURN_REASON, SPECIAL_INSTRUCTIONS_FLAG,
CONFIGURATION_KEY, BUYER_SKU_AUTHORITY, UPDATE_DATE, UPDATED_BY,
CREATION_DATE, CREATED_BY)
SELECT CART_LINE_KEY, CART_KEY, DELIVERY_DATE, SKU, DESCRIPTION,
SKU_AUTHORITY, TOTAL_AMOUNT, SHIPPING_METHOD_CODE, SHIPPING_CHARGES,
SHIPPED_STATUS, QUANTITY, UNIT_OF_MEASURE_CODE, CONFIG_FLAG,
PARENT_KEY, CONFIG_CONTAINER, LIST_PRICE, MEMO, ACTIVE_FLAG,
CONFIG_ID, REQUESTED_DATE, SHIP_COMPLETE, RETURN_CODE, RETURN_STATUS,
RETURN_REASON, SPECIAL_INSTRUCTIONS_FLAG, CONFIGURATION_KEY,
BUYER_SKU_AUTHORITY, UPDATE_DATE, UPDATED_BY, CREATION_DATE,
CREATED_BY FROM CMGT_ORDER_LINE_ITEMS;
```

4. Run:

```
INSERT INTO CMGT_ORDER_LI_EXTN (CART_LINE_KEY, QUANTITY_SHIPPED,
QUANTITY_RETURNED, SHIPPED_DATE, RETURN_REQUEST_DATE,
RETURN_APPROVAL_DATE, SERIALIZABLE_FLAG, ORDER_STATUS, ACTIVE_FLAG)
SELECT CART_LINE_KEY, QUANTITY_SHIPPED, QUANTITY_RETURNED,
SHIPPED_DATE, RETURN_REQUEST_DATE, RETURN_APPROVAL_DATE,
SERIALIZABLE_FLAG, ORDER_STATUS, ACTIVE_FLAG FROM
CMGT_ORDER_LINE_ITEMS WHERE ORDER_STATUS != 20;
```

5. Run:

```
UPDATE CMGT_OIL SET OIL_TYPE=100 WHERE CART_KEY NOT IN (SELECT
CART_KEY FROM CMGT_ORDER_EXTN WHERE CMGT_OIL.CART_KEY =
CMGT_ORDER_EXTN.CART_KEY);
```

Release 6.0 to Release 6.3

Follow the instructions in the Release 6.3.1 *Comergent eBusiness System Implementation Guide*.

Release 6.3 to Release 6.4.1

Follow the instructions in the Release 6.4.1 *Comergent eBusiness System Implementation Guide*.

Release 6.4.1 to Release 6.7

Follow the instructions in the Release 6.7 *Comergent eBusiness System Implementation Guide*.

Troubleshooting and Backing Up the Comergent eBusiness System

Troubleshooting

Testing with the Administration URL

You can make sure that the various parts of the installation are functioning by pointing your browser to the URL used to access the administration pages:

```
http://<server>:<port>/Comergent/en/US/enterpriseMgr/matrix
```

Email Server

You must make sure that the SMTP Mail Server used to send email from the Comergent eBusiness System is up and running. Make sure that you can ping the SMTP Mail Server from the Comergent eBusiness System machine using the machine name specified in the SMTPHost element of the **Comergent.xml** file.

Certain UTF-8 characters may not be display well in the subject lines of email sent from the Comergent eBusiness System to users. This is due to email clients that are not configured to display UTF-8 characters correctly. If the problem persists, review the characters being used in the subject lines of the email and provide information to users about suitable email clients.

General Troubleshooting Tips

This section includes general diagnosis approaches that can help to quickly pinpoint the source of your problem.

Tomcat Server

If you are run Apache Tomcat, then bear in mind the following:

- **SESSIONS.ser**: when Tomcat is shut down, the server saves the current session information to a file called ***container_home/work/Standalone/localhost/Comergent/SESSIONS.ser***. You should delete copies of this file before restarting Tomcat.
- By default, Tomcat does not recompile JSP pages if it determines that its compiled version has a timestamp newer than the corresponding JSP page. If you see errors relating to **MethodNotFound** exceptions, then the likely cause is an old compiled page. You can solve this problem by deleting the ***container_home/work/Standalone/localhost/Comergent/*** directory to force re-compilation of all the JSP pages.

Common Problems

This section covers problems that commonly occur during startup and runtime. You can use the **messageTypeValidate** element to validate all the message types as the system starts. The element is set to **TRUE** by default. You should set this element to **FALSE** once the system has passed its acceptance tests.

Errors at Startup Time

When the Comergent eBusiness System is started by the servlet container, it logs its progress through initialization. Look for these errors in the console window or event log:

TABLE 10. Startup Errors

Error	Cause and Solution
InputStream: 24, 384: "</Comergent>" expected.	A syntax error in one of the configuration files has caused the DataManager to fail to initialize. You must correct the syntax error. The InputStream line provides the exact location of the error.
10/16 14:48:39 error (JRun) Could not pre-load servlet: Init [java.lang.OutOfMemoryError] java.lang.OutOfMemoryError	<p>Insufficient memory has been allocated by the application server for the Java Virtual Machine (JVM) to run.</p> <p>This is a particular problem for Macromedia JRun. We suggest that you increase the maximum allowable memory allocation for the JVM as follows:</p> <p>Login to the JRun Admin Server.</p> <p>Click on the "JRun Default Server" node on the left panel.</p> <p>Click on "Java Settings".</p> <p>Click on "Java Arguments" and in the input field, enter:</p> <p>"-Xms32m -Xmx256M"</p> <p>Restart the default server.</p> <p>If your machine can support it, then consider setting the maximum memory allocation to 512MBytes.</p>
java.io.FileNotFoundException: C:\jakarta-tomcat\webapps\Comergent\WEB-INF\properties\Comergent.xml (The system cannot find the file specified)	The main Comergent.xml file is not in the correct location as specified by the propertiesFile element of the web.xml file.
Env/main:W1:DATASERVICES Primary Connection Failed: Io exception: Connection refused(DESCRIPTION=(TMP=) (VSN=NUM=135290880) (ERR=12505) (ERROR_STACK=(ERROR=(CODE=12505) (EMFI=4))))	<p>The server has failed to connect to the database server. Perform the following checks:</p> <p>Ping the database server machine; there may be a network failure. Enter the IP address of the machine to see whether the host name can be resolved.</p> <p>If you can ping the database server machine, then check that the database connection information that you have entered in the DataSources.xml file is correct. If possible, use an alternate database connection method (such as SQLPLUS or SQL Server's Enterprise Manager). If this fails, then either the database is down or you have incorrect connection information.</p>

TABLE 10. Startup Errors (Continued)

Error	Cause and Solution
Primary Connection Failed: No suitable driver	The server has failed to find a valid Driver class in its classpath. Check that any JDBC driver specified in the DataServices.xml file lies in one of the classpath directories or archive files. In particular, check that an appropriate JDBC driver has been specified to connect to the database server: For Oracle Servers, you may use <code>oracle.jdbc.odb.OracleDriver</code> .
Cannot find file=web-inf/HostedPartner.xml	The initialization servlet has failed to find one of the properties files referred to in the main Comergent.xml file. Check the names and paths to the properties files. In a UNIX installation, check for case-sensitive file names.
Failed to create a NameKeyTable. com.comergent.dcms.util.ICCEException: [CMGT_E_SCHEMA_KEY_GEN_NOT_FOUND] error: "Schema Error - DataObject: Promotion ExternalObject: PromotionControl specifies KeyGenerator: ControlKey which does not exist."	<p>A problem lies in your definition of the XML schema. On startup, the Comergent eBusiness System reads the schema files and attempts to load the schema as an internal data structure. Exceptions are most commonly thrown when the definition of an element is omitted from the schema.</p> <p>In this example, the Comergent eBusiness System has read the DsRecipes.xml file, and attempted to load the Promotion DataObject. This DataObject includes in its definition file, Promotion.xml, a reference to a KeyGenerator element called "ControlKey". Inspection of the DsKeyGenerators file shows that no KeyGenerator element called ControlKey is declared.</p>
java.net.BindException: Address in use	A process is already bound to one of the ports that the Comergent eBusiness System is attempting to use. You must either stop the existing process that is using the port or use a different port.
com.comergent.dcm.util.ICCEException: [CMGT_E_UNKNOWN_ELEMENT] error: "Element: Comment of DataObject: Comment is not in the DCMS schema"	An error has occurred while the DataManager initializes the schema. Check the definition of business and data objects. Check that a header DsElement has been declared for the data object and that DsElements are declared for each data element.

TABLE 10. Startup Errors (Continued)

Error	Cause and Solution
Comergent Init Servlet: DataManager NOT initialized com.comergent.dcm.util.ICCEException: [CMGT_E_SCHEMA_KEY_GEN_NOT_FOUND] error: "Schema Error - DataObject: OrderAddress ExternalObject: OrderAddress specifies KeyGenerator: OrderAddressKey which does not exist."	You have declared a KeyGenerator in the data object definition, but it is not defined in the KeyGenerators.xml file. Make sure that you have modified the correct KeyGenerators.xml file: this is usually OracleKeyGenerators.xml or MsSqlKeyGenerators.xml . Also make sure that your DataServices.xml file points to the correct KeyGenerators.xml file.
2002.10.22 13:33:03:459 Env/Thread-2:ER:DATASERVICES JDBCService.restore Error: ORA-00600: internal error code, arguments: [ttcgcsnd-1], [0], [], [], [], [], [], [] java.sql.SQLException: ORA-00600: internal error code, arguments: [ttcgcsnd-1], [0], [], [], [], [], [], [] at oracle.jdbc.dbaccess.DBError.throwSQLException(DBError.java:168) at oracle.jdbc.ttc7.TTIoer.processError(TTIoer.java:208) ...	There is a mismatch between the Oracle database version (usually 8i or 9i) and the JDBC driver that is being used to connect from the Comergent eBusiness System. Check the classpath that the servlet container is using and remove any references to JDBC driver JAR files that come before the oraclejdbc.jar file in debs_home/Comergent/WEB-INF/ .
Env/main:ER:MSGT Illegal Unresolved Reference to a MessageType: contentFrame	A MessageTypeRef element references a message type definition that does not exist.
Env/main:ER:MSGT com.comergent.api.dcm.messageType.MessageTypeInstantiationException: Failed instantiating or locating com.comergent.apps.partnerMkt.blc.MissingBLC in MessageType GenericLoginDisplay	A message type failed validation: typically, this means that one of its elements is missing such as a missing BLC, controller class, or JSP page.
2003.08.05 15:35:28:359 Env/Thread-6:ER:CORE java.lang.NoClassDefFoundError java.lang.NoClassDefFoundError at com.comergent.dcm.authentication.UserPasswordCredentials.verify(UserPasswordCredentials.java:38) at com.comergent.dcm.authentication.LoginController.execute(LoginController.java:59)	On startup, the Comergent eBusiness System has tried to re-instantiate a session stored when the servlet container was last stopped. Before starting the servlet container, make sure that you have deleted any stored sessions. For example, in Tomcat 4.1, check the container_home/work/Standalone/localhost/Comergent/ directory, and delete any files called SESSIONS.ser .

Errors at Runtime

Some errors are listed here that have occurred infrequently in running instances of the Comergent eBusiness System..

TABLE 11. Runtime Errors

Error	Cause and Solution
Assertion failed: 1 == pConnectionObject->fCallCheck, file q:\SPHINX\NETLIBS\nt\sock\src\ntssockc.c, line 1039	This error has been observed when the Comergent eBusiness System is run with SQL Server. Make sure that you have applied the latest Windows and SQL Server Service Packs to the machine on which SQL Server is running, and make sure that the client SQL Server software installed on the Comergent eBusiness System machine matches your version of SQL Server.
JRun on Solaris runs very slowly.	<ol style="list-style-type: none"> 1. Stop JRun server. Use 'ps' to make sure that no JRun instance is running. 2. Navigate to the <i>debs_home</i> directory, say: <code>cd /opt/jrun/servers/default</code> 3. Enter: <code>mv Comergent/WEB-INF/lib/*.jar lib/</code> 4. Restart JRun. <p>You will need to do this each time you deploy a new Comergent app since the new app will put back the *.jar files in <i>debs_home/Comergent/WEB-INF/lib/</i>.</p> <p>In addition, review the memory settings, specified in the javargs parameter. If possible, increase the minimum setting to 256M.</p>
On Solaris, the server seems to hang too frequently.	<p>There is a dead-lock condition when a certain JRun log level is enabled. Try this work-around:</p> <ol style="list-style-type: none"> 1. Stop JRun. Use 'ps' to make sure that no JRun instance is running. 2. Navigate to the <i>debs_home</i> directory, say: <code>cd /opt/jrun/servers/default/</code> 3. Edit the file local.properties. Change the line <code>logging.loglevel={default}</code> to <code>logging.loglevel=warning,error</code> 4. Restart JRun.

TABLE 11. Runtime Errors (Continued)

Error	Cause and Solution
<p>Running JRun on Solaris, I am getting too many open files error.</p> <pre>001.02.22 12:05:33:941 Env/jcp-2 Request=PageLoader java.io.FileNotFoundException: /opt/jrun/ servers/default/Comergent/common/FullPage- Loader.jsp (Too many open files)</pre>	<p>Edit the file <i>container_home/bin/jrun</i> to add the following line:</p> <pre># Increase the open file setting ulimit -n 1024</pre> <p>after the first set of comments.</p> <p>For example, the start of the script should now look something like this:</p> <pre>#!/bin/sh # # jrun - start a new JVM and instantiate a class # # Usage: # See usage function below. # # Limitations: # each evaluation. \\a -> \\a -> a # 1 line continuation characters could also be # easily supported. # # Increase the open file setting ulimit -n 1024</pre>
<p>I am getting the following error:</p> <pre>java.net.BindException: Port in use by another service or process: 53000</pre>	<p>This error indicates that another process has already opened port 53000.</p> <p>In most cases, you will get this error when your previous JRun instance failed unexpectedly and could not completely clean itself up.</p> <p>On UNIX, use 'ps' to look for such a process and kill it manually using command kill.</p> <p>On Windows, use the Task Manager to look for a java process and try to stop it. Most often it will not work and you will have to reboot windows to clear the port.</p>

TABLE 11. Runtime Errors (Continued)

Error	Cause and Solution
I am getting an error of OutOfMemoryException.	<p>For server operation, the default setting of the java VM is often insufficient. To increase the VM memory setting:</p> <ol style="list-style-type: none">1. Stop JRun.2. Using the JRun administration tool, look for: Default Server -> Java Setting -> Java Args3. Set the value to -Xms256M -Xmx512M.4. Restart JRun.
On Solaris, the servlet container cannot find a certain servlet or URL.	<p>First make sure that you did not make a typo. If you are certain that there was no mistake, then do the following:</p> <ol style="list-style-type: none">1. Run the following command on web.xml: <code>java com.comergent.dcm.util.CheckWebXML web.xml > newWeb.xml</code>2. Edit the file newWeb.xml. Look for the following string <code><!-- (8192) XXX BOUNDARY BREAK --></code> The start of the comment <code><!--</code> is the start of a 8192 boundary break. If it falls within a value for an XML node, then that node will get truncated. A work around is to pad the web.xml file such that the boundary break will fall inside a comment. For more information, see the comments at the start of file <code>CheckWebXML.java</code>.

TABLE 11. Runtime Errors (Continued)

Error	Cause and Solution
<p>You may have trouble re-starting Apache Web server after setting up the External Connection from JRun to Apache. If you get the following error:</p> <pre># bin/apachectl start Syntax error on line 953 of /usr/local/ apache/conf/httpd.conf: Invalid command 'LoadModule', perhaps mis- spelled or defined by a module not included in the server configuration bin/apachectl start: httpd could not be started</pre>	<p>This error message indicates that the Apache server lacks support for DSO (Dynamic Shared Objects). The quickest way to fix this problem is:</p> <ol style="list-style-type: none"> 1. Save the current Apache installation directory. For example: <pre>cd /usr/local mv apache apache.noDSO</pre> 2. Re-compile from source (get a copy from http://httpd.apache.org/). <pre>./configure --enable-shared=max make make install</pre> 3. Verify that the newly compiled Apache has the DSO support: <pre># cd /usr/local/apache # bin/httpd -l</pre> Compiled-in modules: <pre> http_core.c mod_so.c</pre> suexec: disabled; invalid wrapper /usr/local/apache/bin/suexec The important line is the one contains "mod_so.c". 4. Run a quick sanity check: <pre># bin/apachectl configtest Syntax OK</pre> 5. Now copy the Jrun section of the "old" httpd.conf to the "new" httpd.conf. 6. Re-run the sanity check: <pre># bin/apachectl configtest Syntax OK</pre> 7. Start the server: <pre># bin/apachectl start bin/apachectl start: httpd started</pre>

TABLE 11. Runtime Errors (Continued)

Error	Cause and Solution
<p>After updating JRun 3.0 to SP2, if you start JRun, and see the event.log shows the following error:</p> <pre>04/09 11:04:37 info (JRun) Loading jms 04/09 11:04:37 error (JRun) JRun Aborting!</pre>	<p>JRun tried to start a 'jms' service which is not defined. Since the Comergent eBusiness System does not use 'jms', you can just disable that service:</p> <ol style="list-style-type: none"> 1. Edit the file <i>debs_home/local.properties</i> as follows: Change the line <pre>ejb.services=ejb,jms</pre> to <pre>ejb.services=ejb</pre> 2. Restart JRun.
<p>On the Matrix home page, all the URL links have 255.255.255.255. as the host name.</p>	<p>JRun sometimes has a problem figuring out the correct server name when the Comergent eBusiness System asks it to build up each URL. To fix this:</p> <ol style="list-style-type: none"> 1. Edit the file <i>debs_home/Comergent/WEB-INF/properties/Comergent.xml</i> by finding the ServerName element, and changing the value from 127.0.0.1 to the actual server name (either hostname or IP number will work). 2. Restart JRun.
<p>Using JDK 1.2.2_06 on Solaris with JRun 3.0, users experience hang condition and OutOfMemoryExceptions. Running under -verbose:gc shows increasing memory usage trend.</p>	<p>Upgrade the JDK used with JRun to JDK 1.4.2. For additional information, contact Comergent support.</p>
<p>You see parser errors such as:</p> <pre>java.lang.NoSuchMethodError at org.apache.xpath.DOM2Helper.getNamespaceOfNode (DOM2Helper.java:348) at org.apache.xml.utils.TreeWalker.startNode (TreeWalker.java:281) at org.apache.xml.utils.TreeWalker.traverse (TreeWalker.java:119) at org.apache.xalan.transformer.TransformerIdentityImpl.transform (TransformerIdentityImpl.java:320)</pre>	<p>Check that you have followed the instructions to copy the XML parser-related JAR files to the servlet container's lib/ directory, and that you have removed any default parser.jar files.</p>
<p>Running iPlanet, you see the following in your browser:</p> <pre>GX Error (GX2GX) socket result code missing!!!</pre>	<p>There is a mismatch between the web.xml and ias-web.xml files. All servlets mentioned in web.xml must have a corresponding entry in the ias-web.xml file. Use the kguidgen utility to generate a GUID for the servlet.</p>

Backing Up the Comergent eBusiness System

In general, you should plan for the possibility of a catastrophic failure that renders the Comergent eBusiness System machine unusable. In this eventuality, you need to be able to restore the Comergent eBusiness System as rapidly as possible.

We suggest taking the following steps:

1. Replicate the servlet container: keep the installable for the exact release of the servlet container, together with any patches applied. Back up any changes to archive files, or startup scripts that might affect the order of class-loading for example. A copy of the JDK used to run the servlet container would also be useful.
2. Back up the Comergent eBusiness System itself : that is, create a WAR file of the running Comergent Web application directory. This will capture any changes to system properties, business rules, as well as the XML model files, resource files (product images and so on) and other files (such as uploaded GIF files).

Note that the Comergent eBusiness System enables a fair amount of customization that can place files outside of the Comergent eBusiness System Web application directory. If you take advantage of this capability, then you have to backup these directories too. In particular, a clustered installation of the Comergent eBusiness System requires the creation of a shared location that will be external to the Web application directory on any particular machine.

3. Take a snapshot of the database at regular intervals: verify that the Comergent eBusiness System Knowledgebase can be restored from this backup.
4. Make a copy of the **dcmsKey.ser** file and put this in a very safe place. Encrypted data will be unrecoverable if this file is lost. For customers with Release 6.3 or higher, this instruction needs to be modified depending on your choice of encryption scheme and key management policy.
5. Actuate reports will (usually) reside outside of the Comergent eBusiness System, and need to be backed up too.

Customizing your Comergent eBusiness System

The previous two chapters described the process of installing the Comergent eBusiness System using the configuration and data provided by Comergent Technologies. This chapter covers the steps that you perform to customize your implementation of the Comergent eBusiness System. By the time you start work in this chapter, you must have installed the Comergent eBusiness System and have verified that it can connect to a populated Knowledgebase. If you have not done so, then refer to CHAPTER 5, "Installing the Comergent eBusiness System" and CHAPTER 6, "Creating and Populating the Knowledgebase".

The *Comergent eBusiness System Reference Guide* and *Comergent eBusiness System Developer Guide* provide additional information that you may need to consult as you customize your Comergent eBusiness System. The *Comergent eBusiness System Reference Guide* provides a complete description of the underlying configuration files, XML schema, database schema, and related reference data of the Comergent eBusiness System. The *Comergent eBusiness System Developer Guide* provides a detailed description of the architecture and principal Java classes of the Comergent eBusiness System to enable systems integrators to customize the system.

Configuration Overview

In Figure 1 on page 2, we provide a schematic diagram of the system architecture.

The principal areas of customization are those customer-facing applications such as **C3 Advisor** and **C3 Quotes**, and the applications that provide integration with existing ERP systems such as **C3 Integrator** and **C3 Pricing**.

In performing customization, you have to consider:

- to support a multi-locale experience for your customers, you can implement the Comergent eBusiness System to serve different data and Web pages for different locales. See CHAPTER 10, "Internationalization" for more information.
- **Data Objects:** modifications to existing data objects or the creation of new ones. You must also consider what security to enforce on the business objects by using the ACLs.
- **Controllers:** modifications to existing controllers or the creation of new ones.
- **Business Logic Classes:** modifications to existing business logic classes or the creation of new ones.
- **JSP Pages:** modifications to existing JSP pages or the creation of new ones.
- **Message Types, Entitlements, and User Roles:** you must create new message types to support additional application logic and you must consider what roles may execute the message types.
- **Configuration Files:** general configuration information is maintained in the configuration files. You must review the configuration settings for your implementation.
- **Populating the Knowledgebase Tables:** If you plan to populate some or all of the Knowledgebase using existing data, then you must consider your strategy to import the data into the Comergent eBusiness System.

Data Objects

Customizing Data Objects

A set of reference data objects are defined by the XML schema provided with the Comergent eBusiness System. These may be sufficient for your implementation. However, you may need to add fields to existing data objects or implement new data objects. See the *Comergent eBusiness System Reference Guide* and *Comergent eBusiness System Developer Guide* for further information about data objects.

If you make changes to data objects or create new ones, then you must run the generateDTD target to generate the DTDs for the data objects. Then you must also run the generateBean target. The generated Bean classes and interfaces are compiled into the com.comergent.bean.simple package.

Controllers

Controller classes are the main classes used to perform the business logic of the Comergent eBusiness System and to process requests. If you want to modify the business logic of the system or to change the structure of data objects, then you must modify the related controllers or create new ones.

Business Logic Classes

Business logic classes (BLCs) manage some of the business logic of the Comergent eBusiness System applications.

Note:	As of Release 6.0, the use of BLCs is deprecated. Use controller or bizAPI classes to manage application business logic.
--------------	--

If you want to modify existing business logic or add new functionality, then you can modify or create BLCs. See the *Comergent eBusiness System Reference Guide* and *Comergent eBusiness System Developer Guide* for more information.

As well as modifying and creating BLCs, you must also ensure that the BLCs are called in response to particular message requests. This involves modifying the **MessageTypes.xml** configuration file. See "Message Types, Entitlements, and User Roles" on page 133 for more information.

JSP Pages

JSP (JavaServer Pages) pages are used to dynamically generate the HTML content that is returned to users' browsers. You should not need to modify the administration pages, but you may have to customize the customer-facing JSP pages for the following reasons:

- To add company and branding to the pages.
- To add navigation and modified work flow links.
- To add modified or new business object information to the pages.

See the *Comergent eBusiness System Developer Guide* for examples on how to customize JSP pages.

Customizing Catalog Navigation and Display

Navigation Levels

You can customize the catalog navigation menu to manage the number of category levels visible to users as they navigate down through the catalog.

1. Set the **C3** Advisor business rule C3 Advisor Maximum Number of Menu Shown to the requisite number of levels to display.
2. Edit the **catalog/CatalogNavigateBody.jsp** JSP page to set the values of **gA_COORDS_TOP** and **gA_COORDS_LEFT**. These determine exactly where the menu is positioned on the page.

Catalog Display Styles

You can customize how product categories are displayed to end-users by associating display styles to product categories. Each display style is defined as a message type: this determines the JSP page used to display the product category. The **CatalogDisplayStyle.xml** configuration file is used to define the display styles. This file is described in the *Comergent eBusiness System Administration Guide*.

Enterprise product managers can use the **C3** Product Manager UI to assign display styles to particular product categories. As well as specifying the display style, they can also specify parameters to be used as part of the request, and these can be used by the controller and JSP page that are used to display the product category.

Customizing Partner Selector

The Comergent eBusiness System provides a means for end-users to request that partners contact them: the user specifies some criteria to determine what partners receive their inquiry: this is known as the Partner Selector. You can change how the Partner Selector works as follows:

1. Modify the **ResellerSelectorSelectData.jsp** page to add or remove the selection criteria that you want users to be able to specify.
2. Modify the **ResellerSelectorListController.java** controller class: this class extracts the selected criteria when a user submits the selection form from the **ResellerSelectorSelectData.jsp** page.

3. Modify the `ResellerSelectorListSelectController.java` controller class to build up the query that should be used to retrieve the list of selected partners.

Message Types, Entitlements, and User Roles

When a user clicks a link on a Comergent eBusiness System page, the URL includes a message type (as the “cmd” parameter). This message type is used to determine which controller is invoked to process the request, and it also determines which BLC, controller, and JSP pages are used to process the request and generate the response.

You maintain the mapping from message type to BLC, controller, and JSP page in the **MessageTypes.xml** configuration files. If in modifying or creating new business logic, you create a new message type, then make sure that you add the message type to **MessageTypes.xml** and that it is mapped to the appropriate controller, BLC, and JSP page.

Entitlements

The Comergent eBusiness System ensures that only authorized users may execute message types. When you create each user, you can assign them one or more functions: these map to entitlement roles and these roles determine what message types the user may execute.

Each message type belongs to a message group and each message group may be granted or denied to a user role. You define the assignment of message groups to roles in the **Entitlements.xml** file.

User Roles

The Comergent eBusiness System makes use of user roles in two different ways in the security mechanisms.

- First, the roles are assigned message groups as described above.
- Second, user roles are used to filter access to business objects defined in the access control lists (ACLs). See the *Comergent eBusiness System Reference Guide* for more information.

Configuration Files

The Comergent eBusiness System maintains configuration information in configuration files. You must edit these files to provide the configuration information specific to your implementation of the Comergent eBusiness System.

Customizing the Configuration Files

Once you have prepared the Knowledgebase, you must make sure that the pointers to the database are set appropriately in the configuration files. You should use the SDK to work with making changes in these files, but you can also modify them manually as described in this section.

To Configure your Comergent eBusiness System

1. Modify the main configuration file, **Comergent.xml**, to match your installation.

By default, this file is in the *debs_home/Comergent/WEB-INF/properties/* directory. Check that the **Comergent.xml** file has correct entries for the following elements:

- **entitlementFilename**: this element points to the file in which you manage user entitlements.
 - **messageTypeFilename**: this element points to the files that map message requests to the BLCs, PLCs, controllers, HTML templates, and JSP pages.
 - **ConverterMap**: this element points to the file that determines which Converter class is to be used to process the XML messages.
 - **DataServices**: this element points to the file that controls access to the data layer.
 - **ServerName**: set this element to the external name for this machine.
2. Edit **DataServices.xml**.
 - If you are running against an IBM DB2 Universal Server database:
 - Change the **DsDataSources** element to point to **DB2DataSources.xml**.
 - Change the value of the **DsKeyGenerators** element to **DB2KeyGenerators.xml**.
 - If you are running against an Oracle Server database:
 - Change the **DsDataSources** element to point to **OracleDataSources.xml**.
 - Change the value of the **DsKeyGenerators** element to **OracleKeyGenerators.xml**.
 - If you are running against an SQL Server database:

- Change the DsDataSources element to point to **ODBCDataSources.xml**.
- Change the value of the DsKeyGenerators element to **ODBCKeyGenerators.xml**.

Note that earlier releases used these files to connect to a SQL Server deployment of the Comergent eBusiness System.

- Change the DsDataSources element to point to **MsSqlDataSources.xml**.
- Change the value of the DsKeyGenerators element to **MsSqlKeyGenerators.xml**.

3. Edit the appropriate **DataSources.xml** file.

- If you are running against an IBM DB2 Universal Server database, edit the **DB2DataSources.xml** file:
 - Change the value of the ConnectionString attribute to point to the machine name, port, and database of the DB2 instance.
 - Change the UserId and Password attributes to connect to the appropriate DB2 database.
- If you are running against an Oracle Server database, edit the **OracleDataSources.xml** file:
 - Change the value of the ConnectionString attribute to point to the machine name, port, and SID of the Oracle instance.
 - Change the UserId and Password attributes to connect to the appropriate Oracle database.
- If you are running against an SQL Server database, edit the **ODBCDataSources.xml** file:
 - Change the value of the ConnectionString attribute to the machine name of the SQL Server instance.
 - Change the UserId and Password attributes to connect to the appropriate SQL Server database.

4. Modify the **MessageTypes.xml** files.

By modifying this file, you enable the Comergent eBusiness System to support the appropriate message versions.

Populating the Knowledgebase Tables

Data Objects Data

The following are the principal ways in which you can enter data into the Comergent eBusiness System:

- You can use the administration pages to create partner profiles, users, products, price lists, and so on. See the *Comergent eBusiness System Administration Guide* for more information.
- You can use the **C3** Integrator to synchronize data with an existing ERP system. See CHAPTER 20, "Implementing Order Management Integration" for more information.
- You can use a scripting technique to load the data into the Knowledgebase.

In general, the scripting technique requires you to create a “data bridge” from the source of the data to the Comergent eBusiness System.

XML Data Loading

Release 7.0.2 supports loading Knowledgebase data using XML documents that define the data of each business object. Data for both the reference and minimal implementations of the Comergent eBusiness System is loaded this way.

XML data loading exercises the business logic of the Comergent eBusiness System. You create the definition of each data object as part of an XML document, and then use the XML data loader batch script to load the data.

A typical form of the data object definition is:

```
<Promotion state="INSERTED" type="BusinessObject">
  <PromotionKey state="INSERTED">1</PromotionKey>
  <PromoCode state="INSERTED">ID1</PromoCode>
  <PromotionName state="INSERTED">Free Support</PromotionName>
  <Description state="INSERTED">Get Free Support</Description>
  <URL state="INSERTED">STATIC_URL/promotions/PartnerA1.htm</URL>
  <AddToCartSku state="INSERTED">MXWS-7600</AddToCartSku>
  <AddToCartQty state="INSERTED">3</AddToCartQty>
  <OwnedBy state="INSERTED">1</OwnedBy>
  <AccessKey state="INSERTED">206</AccessKey>
  <PromotionUpdatedBy state="INSERTED">3</PromotionUpdatedBy>
  <PromotionCreatedBy state="INSERTED">3</PromotionCreatedBy>
  <PromotionControl state="INSERTED">
    <ControlKey state="INSERTED">1</ControlKey>
    <ControlName state="INSERTED">New PControl</ControlName>
    <StartDateActive state="INSERTED">
```



```
2000-01-01 12:00:00.0
</StartDateActive>
<EndDateActive state="INSERTED">
2000-12-31 23:59:00.0</EndDateActive>
<Priority state="INSERTED">5</Priority>
<EnabledFlag state="INSERTED">true</EnabledFlag>
<PartnerType state="INSERTED">Systems Integrator</PartnerType>
<MemberLevel state="INSERTED">Platinum</MemberLevel>
<ControlUpdatedBy state="INSERTED">3</ControlUpdatedBy>
<ControlCreatedBy state="INSERTED">3</ControlCreatedBy>
</PromotionControl>
<PromotionSkuList state="INSERTED">
  <PromotionSku state="INSERTED">
    <SKU state="INSERTED">MXLP-7410</SKU>
    <UpdatedBy state="INSERTED">3</UpdatedBy>
    <CreatedBy state="INSERTED">3</CreatedBy>
  </PromotionSku>
</PromotionSkuList>
</Promotion>
```

In general, the data bridge should generate the XML data object definitions automatically. See "Populating the Knowledgebase" on page 96 for more information on running the XML data loading scripts.

SQL Scripts

It is possible to write SQL scripts to insert data directly into the Knowledgebase. For example, use SQL statements along these lines to insert partner profile data into the Knowledgebase:

```
INSERT INTO CMGT_PARTNERS (UPDATED_BY, CREATED_BY, PARTNER_NAME,
LEGAL_NAME, PARENT_COMPANY, STATUS, ADDRESS_KEY, EMAIL_ADDRESS,
DUNBRAD_ID, BUSINESS_ID, TYPE, MEMBER_LEVEL, BUSINESS_TRANSACTION,
NET_WORTH, NUM_OF_EMPLOYEES, POT_REV_CURR_FY, POT_REV_NEXT_FY,
REFERENCE_USE_FLAG, COTERM_DAY_MONTH, URL, YEAR_ESTD, ANALYSIS_FY,
FISCAL_YEAR_END_MONTH, OWNED_BY, ACCESS_KEY, XML_MESSAGE_VERSION,
DISTI_ACCESS) VALUES (1, 1, 'AffinityNet', 'Affinity Net Technolo-
gies', 'Affinity Corporation', 'A', 2, 'gmehra@comergent.com',
'bus0231-a34f', 'M00212G', 'Reseller', 'Gold', 'MDF', 10000000.00, 60,
12500000.00, 15000000.00, 'Y', sysdate, 'www.affinitynet.com',
'December 1989', '', 'November', 1, 2, 'Comergent 2.0', 1);
```

However, this is a delicate and time-consuming process: you have to bear in mind when primary keys are being generated automatically. When you need to use a foreign key in an INSERT statement that refers to the primary key of another business object make sure that the primary key has been created.

SQL scripts are also database server-specific: you cannot use the same script to load data into DB2 Universal Server, SQL Server, and Oracle Server databases. We suggest that you use XML data loading as described above.

Common Attributes

In maintaining information in the Knowledgebase, you make use of commonly used attributes that are referenced by different applications. These attributes include:

- currencies such as US dollars, Japanese Yen, and so on
- locales
- order statuses
- partner types, such as “Distributor”, “Reseller”, and so on
- partner levels, such as “Gold”, “Silver”, and so on
- services that each partner offers
- skills that each partner offers
- territories in which each partner works
- customer types (formerly vertical markets) in which each partner operates

To ensure that the correct values for these attributes are available for selection when an administrator is working with the Comergent eBusiness System, you must populate the corresponding database tables with the available values. This section describes the steps required to do this with XML data loading.

The **LightWeightLookupList** XML file in the XML data loading directory provides a template to demonstrate how data may be loaded into the CMGT_LOOKUPS table. See the *Comergent eBusiness System Reference Guide* for information about this table.

You load some attribute data into their own dedicated tables. These include: currencies, locales, ratings, services, territories, and customer types (vertical markets). You must edit the corresponding XML data loading files to make modifications to this data.

Locales

You must make sure that only the locales that you want to support are declared in the **LocaleDataList** file.

Partners

Every implementation of the Comergent eBusiness System must create these partners:

- Enterprise
- AnonymousUserPartner
- RegisteredUserPartner

Make sure that you do not change the names of these three partners.

Request and Message Processing

The Comergent eBusiness System responds to incoming *requests* received from user's browsers and to incoming *messages* received from other Comergent eBusiness System servers.

Each request is the result of a user clicking a link or button on a Comergent eBusiness System Web page or of an external system posting an XML message to the Comergent eBusiness System. Each request is processed by a *controller*, and sometimes a BLC, and usually uses a JSP page to display the result of the request in the user's browser.

Messages are sent from one Comergent eBusiness System to another. When the Comergent eBusiness System receives a message from another server, it must know how to process the message. It first converts the message from its external message type to the internal Comergent XML message type. Then, for each message type, the server must assign a BLC that processes messages of that type.

Comergent eBusiness System configuration files, **MessageTypes.xml**, specify the mapping from requests to BLCs and controllers. Each request may be also mapped to a JSP page as specified in the **MessageTypes.xml** files.

Each Comergent XML message is converted into business objects by a converter class. To ensure that each message is converted into the correct business objects, you must specify which converter class is used for a family of messages. You do this using the **ConverterMap.xml** configuration file.

Each external message must be converted from its external form to Comergent XML. This is done through the MessagingServlet, the MessageCracker, and Converter classes. See CHAPTER 19, "Message Conversion" for more information.

If you do not change any message types or business objects, then you do not need to implement any changes to message conversion. If however, you change the definition of business objects used in processing external messages, then you should also consult CHAPTER 19, "Message Conversion".

Configuring the Data Services Layer

This section describes the most important configuration parameters associated with the data services layer. It covers:

- How do I control what JDBC Drivers are loaded?
- How do I set up a Custom Data Service?
- How can I control connection behavior?
- How do limit my query results and control pagination?
- How do change where result set page files are written?
- What is the ServerId used for?
- How do I ensure locale specific sorting of query results?
- What is the purpose of the database specific properties?
- What does MaxRequestsPerConnect control?
- What are the other database specific properties?

All the elements referred to in this section are specified in the **DataServices.xml** configuration file, and may be set through the System Administration user interface.

How do I control what JDBC Drivers are loaded?

The <JdbcDriver1> through <JdbcDriverN> elements control which JDBC drivers are loaded. If no JDBC driver is required, then the property can be commented out.

How do I set up a Custom Data Service?

It is possible to plug-in custom services to provide access to special data sources. These services must support the DataInterface interface for non-relational data stores, or its extension the SQLDataInterface interface if they access relational data stores.

If you have created a custom Data Service class that implements the `DataInterface` interface, then it can be registered with DataServices by adding an entry in the **DataServices.xml** properties file.

The entry will be of the form:

```
<CustomService controlType="text" runtimeDisplayed="true"
  ChangeOnlyAtBootTime="true" visible="true" boxsize="45"
  displayQuestion="Custom Service Class Name"
  defaultChoice="com.comergent.dcm.dataservices.CustomService"
  help="Enter the Service class that implements DataInterface.">
  com.comergent.dcm.dataservices.CustomService
</CustomService>
```

The **DataSources.xml** schema file may now refer to a “Custom” service and the property will be used to determine the class path and load the service dynamically.

How can I control connection behavior?

The `ConnectTimeout` element controls how many minutes pass before a connection is revalidated. If the property is set to 0, then there is no timeout. This property works in combination with `ReconnectOnTimeout`.

The `ReconnectOnTimeout` element controls whether the connection is discarded when the timeout period has elapsed. When a connection is retrieved from the pool, if this property is set to true and the timeout period has elapsed the connection will be closed and a new connection will be established automatically. If this property is set to false, then the connection will be tested and will be reestablished if the connectivity test fails.

These properties can be used to resolve dropped connections or firewall restrictions.

How do I limit my query results and control pagination?

The setting of the `MaxResults` element determines the maximum number of records that can be retrieved during a restore. When that number is reached the request is freed and any additional results are discarded.

The setting of the `NumPerPage` element determines how many records are saved in each result cache page. If the number found is less than `NumPerPage`, then no result cache is created.

Note that this combination of attributes now allow the application to retrieve a set of paginated results while still specifying a maximum number of records to retrieve.

These properties control the system default behavior. They can be overridden by the application using the DataContext.

How do change where result set page files are written?

The rsCachePath element provides the file path used for page files.

What is the ServerId used for?

The ServerId element is used to assist with the generation of unique key values in a clustered environment. This is only necessary if key generators use the MaxValue option to generate key values (normally used for Microsoft SQL Server).

With the MaxValue approach, the current key value is seeded using the maximum key value obtained from the database at startup. The next available key is then maintained in memory. In a clustered environment this would normally cause a conflict since multiple machines are keeping track of keys independently. To eliminate this problem, the last two digits of the key contain the ServerId.

The two-digit ServerId can contain any unique value from 00 to 99.

How do I ensure locale specific sorting of query results?

The UseLocalizedSort element determines whether we ask any underlying database to perform locale-specific sorting of query results.

Turning on locale specific sorting will slow down many queries since the database is no longer able to rely on index ordering to control the result set order. The database may instead need to perform a secondary sort that reflects the locale specific sort sequence. By default this property is set to false.

What is the purpose of the database specific properties?

While most RDBMS follow ANSI standards for behavior and SQL support, there are minor variations between them. There are also differences in efficiency for certain operations. The database specific properties allow us to tune our behavior to suit each specific database type.

What does MaxRequestsPerConnect control?

Our connection pooling mechanism allows read-only connections to be shared for multiple concurrent requests. With some database drivers this can improve throughput by reducing connection resources. The drivers currently supported by Comergent work more efficiently if there is only one concurrent request per connection. We recommend leaving this at the default setting of 1.

What are the other database specific properties?

The DATE element specifies the JDBC datatype returned for a DATE. This is necessary due to deviations from the JDBC standard by some drivers.

The SupportsIntersect element indicates if the underlying database recognizes the SQL INTERSECT operator. If it does not, then we will attempt to transform an INTERSECT into an equivalent request using sub-queries.

The LowerCase element indicates the SQL function that converts strings to lowercase for the selected database. For Microsoft SQL Server we leave this property empty since SQL Server can be set to perform case insensitive string comparisons.

The UpperCase element indicates the SQL function that converts strings to uppercase for the selected database. For Microsoft SQL Server we leave this property empty since SQL Server can be set to perform case insensitive string comparisons.

Order Process Modeler

Release 6.4 introduces the Order Process Modeler: this is a mechanism to manage the business logic of the order management cycle. The Order Process Modeler manages the state transitions of an order as it proceeds through the stages after it has been placed by a user. See CHAPTER 21, "Order and Return Management" for more details.

Managing Comergent eBusiness System Logging

This chapter provides a description of the logging service used to manage logging messages in the Comergent eBusiness System. The *Comergent eBusiness System Developer Guide* provides a more detailed view of how to use the logging API to write logging messages.

Logging

Use the logging settings of the Comergent eBusiness System to monitor activity of the Comergent eBusiness System and to help diagnose problems.

Logging Preferences and Configuration

In Release 7.0 and higher, logging is handled through the log4j API and it uses the Preferences API to retrieve logging configuration properties. The basic configuration file for the log4j API is **log4j.properties**. A copy of this file with default logging properties is included in the **WEB-INF/lib/cmgt-logging.jar** JAR file packaged with the Comergent eBusiness System.

If you want to override the default properties, then you must create a text file called **log4j.properties** and copy it to the **WEB-INF/classes/** directory. Any values that you specify in this file will overwrite the corresponding values in the **log4j.properties** file in the **cmgt-logging.jar** file. The following sections describe some typical changes you may want to make:

- "Logging to the Console" on page 146
- "Changing Logging Level for a Package" on page 146
- "Formatting Logging" on page 147
- "Logging File Size" on page 147

Logging to the Console

If you want logging output to the standard output stream, rather than to a logging file, specify the use of the STDOUT appender:

```
log4j.rootCategory=info, STDOUT
```

Depending on the configuration of the servlet container, the logging output will be directed to the standard destination of the System.out output stream. Note that when you specify a different appender, then you must include the appender's properties in the custom **log4j.properties** file too. For example:

```
log4j.appender.STDOUT=org.apache.log4j.ConsoleAppender
log4j.appender.STDOUT.layout=org.apache.log4j.PatternLayout
log4j.appender.STDOUT.layout.ConversionPattern=[%t] (%c{2}) - %m%n
```

Note that you can also force logging to be output to the System.out output stream by specifying `-Dcomergent.console.logging=true` as part of the command line that starts the servlet container. This overrides any logging properties specified in the **log4j.properties** configuration file.

Changing Logging Level for a Package

If you want to see more detailed logging information from just one Java package as it is executed, then you can specify this by overriding the root logging level. By default, all logging is done at the INFO level, because the rootCategory is defined as follows:

```
log4j.rootCategory=info, CMGT
```

For example, to specify DEBUG level logging for the visualModeler API package, enter:

```
log4j.logger.com.comergent.api.apps.visualModeler=DEBUG
```

The specification of logging is hierarchical following the package organization of the Comergent eBusiness System. Thus if you specify:

```
log4j.logger.com.comergent.api.apps=WARNING
```

Then, all logging at the API level will be done at the WARNING level except for the visualModeler package.

Formatting Logging

You can format the logging output to suit your needs. For example, the following will provide a more compact logging format than the standard default layout:

```
log4j.appender.CMGT.layout.ConversionPattern=[%r] [%t] (%c{1}) - %m%n
```

Logging File Size

If log files get too large, then consider modifying the logging preferences to rotate the log files. For example, you can specify that log files are rotated once they reach 10MBytes in size as follows:

After the line:

```
log4j.appender.CMGT=com.comergent.logging.ComergentRollingFileAppender
```

add:

```
log4j.appender.CMGT.MaxFileSize=100KB
```

Alternatively, to specify that log files should be rotated daily, change:

```
log4j.appender.CMGT=com.comergent.logging.ComergentRollingFileAppender
```

to:

```
log4j.appender.CMGT=com.comergent.logging.ComergentDailyRollingFileAppender
```

Logging File Locations

The location of logging files varies from one servlet container to another: here are some standard locations:

TABLE 12. Servlet Container Log Files

Servlet Container	Log File Location
JRun	<i>container_home/logs/</i>
Tomcat	<i>container_home/logs/</i>
WebLogic	<i>container_home/user_projects/domains/mydomain/</i>
WebSphere	<i>container_home/logs/</i>

This chapter covers the steps required to enable your implementation of the Comergent eBusiness System to provide your customers with an e-commerce experience in their preferred language and location.

Attention: There are known issues with the Comergent eBusiness System using SQL Server to support locales other than en_US. See "SQL Server" on page 22 for further information.

"Setting up a Single Locale Comergent eBusiness System" on page 162 provides step-by-step guide to creating a single-locale instance of the Comergent eBusiness System.

Overview

The Comergent eBusiness System is internationalized: that is, it has built-in support for:

- multiple currencies
- multiple languages
- number and date formats
- character sets

In addition, you can manage other aspects of localization for specific markets such as:

- local laws and regulations
- currency processing
- shipping and export information
- tax

Support for internationalization is managed using locales. Each locale identifies a language and country. By identifying which locale is to be used when displaying information to a user, you ensure that the user sees information that is both specific to their locale and presented as they would expect to see it.

Support for Multiple Locales

It is possible to implement the Comergent eBusiness System Release 7.0.2 to support more than one locale. By enabling users to experience your Web site using their preferred locale, you can ensure that they see the Web pages in their preferred language and see numbers and dates in their expected format.

Data

When users visit your Web site, they want to read about your products in their preferred language. By providing product information in several languages, you can ensure that each visitor is able to easily find about your products and services. The Comergent eBusiness System enables you to create product data in different languages and when a visitor's preferred language is known, the information is served to them in that language.

For example, you can provide product descriptions in several different languages and you can ensure that questions displayed to users use the correct language as they navigate the **C3** Advisor questionnaire.

Web Pages

All of the Web pages used in the Comergent eBusiness System are generated from JSP pages. By using JSP pages tagged with the text tag and maintaining resource bundles for locales, you can display locale-specific text to users. Alternatively, by creating different JSP pages for different locale families, you can present a different look-and-feel to your Web site for users whose languages are different or who may need information specific to a particular country.

In addition, the formatting of numbers and dates may be different from one locale to another: for example, 1,000.00 in the US is displayed as 1.000,00 to a German user. You can manage these differences using JSP pages so that every user feels comfortable that the Web pages are presenting the information exactly as they prefer it.

You can customize as little or as much of each JSP page as you like from one locale to another. Each set of JSP pages for a locale family is maintained in a separate directory, so changes made for one locale may or not may be required for another locale.

See the *Comergent eBusiness System Developer Guide* for more information about how locales are used to manage the display of information in locale-specific ways.

Locale Specification

A locale comprises a language and a country: for example, “English and United States” or “Italian and Switzerland”. The same language may be used in more than one country: French in France, Switzerland, and Canada for example. In one country there may be speakers of more than one language: French, German, Italian, and Romansch in Switzerland for example.

The ISO standards 639 and 3166 specify a list of standard abbreviations for languages and countries and you must use these in your work. Some common language abbreviations are: Arabic (ar), Chinese (zh), English (en), French (fr), German (de), Hindi (hi), Japanese (ja), and Spanish (es).

Some common country abbreviations are: Canada (CA), China (CN), France (FR), Germany (DE), India (IN), Indonesia (ID), Japan (JA), United Kingdom (GB), and United States (US).

By combining a language and a country, you can uniquely specify a locale. For example: en_US (English-United States), it_CH (Italian-Switzerland), and zh_TW (Chinese-Taiwan). Locales are stored in the Comergent eBusiness System using this representation.

Using Locales

Each installation of the Comergent eBusiness System defines a *system default locale* in its **Internationalization.xml** file using the defaultSystemLocale element.

User Locales

When a user works in the Comergent eBusiness System, their *current locale* is used to determine the look-and-feel of Web pages and which locale-specific data (such as product descriptions) is used to display business object data to the user.

Each user has a *preferred locale* specified in their user profile. When a user first enters the Comergent eBusiness System, their current locale is set to their preferred locale. If they change their current locale as they work, then they will see the Web pages in the new locale.

Users change locale by selecting a new locale from a drop-down list of available locales. The display names for each locale in the drop-down list depend on the user's current locale. For example, if the user's current locale is en_US, then the display name for fr_FR can be "French-France", and if the user's current locale is fr_FR, then the display name for en_US can be "Anglais-Etats Unis". Consequently, as well as populating the Knowledgebase table of locales, CMGT_LOCALE, you must also populate the CMGT_LOCALE_NAMES table with display names for each locale.

Default Locales for Languages

You may not wish to maintain all of the JSP pages for all locales. Much of the time, the same pages can be used for a given language irrespective of the locale country. The Comergent eBusiness System enables you to specify a default locale for each language so that if JSP pages are not available for the specific locale, then the language's default locale's JSP pages are used instead. The language's default locale is specified using the defaultCountry elements of the Languages element of the **Internationalization.xml** configuration file.

Similarly, the defaultSystemLocale element is used to determine which JSP pages to serve if they are not provided in the language's default locale directory.

Example

For example, you may decide that the fr_CA locale can use almost all of the same JSP pages as the fr_FR locale, and create only one or two special pages for the French Canadian locale.

Rather than duplicate all of the JSP pages in both the fr_FR and fr_CA locales, you can put all of the JSP pages in the **fr/FR/** locale directory, and place only the special pages in the **fr/CA/** directory. You then specify in the **Internationalization.xml** file that for the French language the default locale is fr_FR:

```
<fr visible="false">
  <defaultCountry controlType="text" runtimeDisplayed="true"
```



```
ChangeOnlyAtBootTime="true" visible="true" boxsize="60"
displayQuestion="URL for the Help Files" defaultChoice="FR"
help="This is the default country for a specific
    language">
    FR
</defaultCountry>
</fr>
```

When the Comergent eBusiness System is running and a user's current locale is **fr_CA**, then whenever a JSP page is not provided in the **fr/CA/** locale directory, the system will use the corresponding page from the **fr/FR/** directory.

If the requested JSP page is not in the **fr/FR/** directory, then the JSP page in the default system locale directory is used. If the JSP page does not exist here, then the system will display an error. Consequently, make sure that the default system locale has a complete set of JSP pages.

Creating Locales

You can create locales as part of the implementation process (see "To Create Locales at Implementation" on page 153) or at any time after the Comergent eBusiness System has been set up and is running (see "To Add a Locale to an Existing Implementation" on page 156).

To Create Locales at Implementation

Follow these steps:

1. Make a list of the locales you want to support. For example: **en_US** (English-United States), **zh_TW** (Chinese-Taiwan), **fr_FR** (French-France), **fr_BE** (French-Belgium), **de_DE** (German-Germany). Determine which of these belong to the same locale families: that is, decide which locales can use the same JSP pages with different resource bundles and which must use different JSP pages.

Decide which locale should be the default locale for each language. For example, use **en_US** as the default locale for the **en_CA**, **en_GB**, and **en_US** locales. Modify the **Internationalization.xml** file by setting the **defaultCountry** elements for each language.

Decide which locale is the system default locale: modify the **Internationalization.xml** file by setting the **defaultSystemLocale** element to this locale.

2. Make sure that your database will support the character sets used by the locales. In general, you should use Unicode UTF-8. You can use other

character sets if desired, but you will have to change the encoding specified in all the JSP pages and the system encoding setting. This is set as the value of the `charEncoding` element of the **Internationalization.xml** configuration file.

3. Edit the **LocaleDataList** and **LocaleNameDataList** files (to be found in ***debs_home/Comergent/WEB-INF/xmldata/*** directory) to create the locales and display names you listed in Step 1.
4. Edit the **LightWeightLookupList** file to add strings for all the required lookup types and lookup codes for all the supported locales.
5. If you are implementing **C3 Analyzer**, then edit the **DsAnalyzerTextList** file to provide locale-specific text for each of the supported locales. This is text that is displayed on the report pages. See the *Comergent eBusiness System Reference Guide* for more information.
6. Run the schema creation scripts and your data loading scripts. See CHAPTER 6, "Creating and Populating the Knowledgebase" for more information on performing this step.
7. Copy over the following directories from ***debs_home/Comergent/WEB-INF/web/en/US/*** to ***debs_home/Comergent/WEB-INF/web/la/CO/***:
 - **cic/**
 - **common/**
 - **home/**
8. Make sure that application directories exist under ***debs_home/Comergent/WEB-INF/web/*** for each of the supported locale families. For each locale family, *la_CO* (language-country), you must have directories ***debs_home/Comergent/WEB-INF/web/la/CO/*** populated with all the application directories used by your implementation of the Comergent eBusiness System.

Each locale family must have a distinct set of JSP pages that reflect the language and business needs for the locales of the family. These include differences in language size, layout, and flow as well as business information and flows that vary from one locale family to another.

Within a locale family, you do not need to create a full set of JSP pages. For most pages, the JSP pages are already suitably localized by the use of the text tag. All you need to do is to localize the resource bundles as described

in Step 12. However, if a locale needs a special JSP page, then create the page and put it in the corresponding location in the JSP page directory structure.

The failover mechanism as described in the *Comergent eBusiness System Developer Guide* ensures that locale-specific pages are used where they are available, and that the appropriate language or system default locale pages are used otherwise.

For example, if you plan to install a full implementation for the Italian-Switzerland locale, then you should have directories: ***debs_home/Comergent/WEB-INF/web/it/CH/adirect/***, ***debs_home/Comergent/WEB-INF/web/it/CH/advisor/***, ***debs_home/Comergent/WEB-INF/web/it/CH/advisorAdmin/***, and so on under the ***debs_home/Comergent/WEB-INF/web/*** directory.

9. Under ***debs_home/Comergent/***, make sure that you create locale directories along the same lines for the static content files and copy the contents of the following directories: ***debs_home/Comergent/en/US/common/***, ***debs_home/Comergent/en/US/css/***, ***debs_home/Comergent/en/US/htdocs/***, ***debs_home/Comergent/en/US/images/***, and ***debs_home/Comergent/en/US/js/*** into these for each locale.

For example, you should have ***debs_home/Comergent/it/CH/common/***, ***debs_home/Comergent/it/CH/css/***, ***debs_home/Comergent/it/CH/htdocs/***, ***debs_home/Comergent/it/CH/images/***, and ***debs_home/Comergent/it/CH/js/*** under ***debs_home/Comergent/it/CH/***.

You should create cascading style sheets and images as appropriate for your new locale. The static Javascript files in the ***debs_home/Comergent/it/CH/js/*** directory should be reviewed: you will need to translate the strings displayed to users into suitable strings for the new locale. For example:

For example, when you copy over the ***genericUtil.js*** file to the new locale, in the ***moveItem*** function, you have to translate the two strings in the ***alert()*** calls that can potentially be displayed to users:

```
alert("You did not select an item to move. Please select one item
and click the Move Up or Move Down button.");
alert("Only one item can be selected to move up or move down.");
```

Take care that any single quotes (') in the translated strings are escaped (\').

10. Edit the ***web.xml*** file in ***debs_home/Comergent/WEB-INF/*** to add servlet mappings for each locale. You can simply copy and paste the block of servlet mappings for the ***en_US*** locale and then edit all the occurrences of ***/en/US/*** to ***/la/CO/***. For example, change:

```
<servlet-mapping>
  <servlet-name>DispatchServlet</servlet-name>
  <url-pattern>/en/US/partnerMkt/matrix</url-pattern>
</servlet-mapping>
```

to:

```
<servlet-mapping>
  <servlet-name>DispatchServlet</servlet-name>
  <url-pattern>/fr/FR/partnerMkt/matrix</url-pattern>
</servlet-mapping>
```

Some pre-packaged **web.xml** files are provided with the support for standard locales. These are: **web_en.xml**, **web_en_de.xml**, **web_en_fr.xml**, and **web_en_de_fr.xml**. To use these files, simply rename the current **web.xml** to **web.bak** and rename the appropriate file to **web.xml**.

11. Customize the JSP pages in the application directories under **debs_home/Comergent/WEB-INF/web/** for each locale to reflect your locale-specific design and business needs.
12. For each locale, create resource bundles for the locale. For the generated resource bundles defined in *.**properties** files, you should be able to start with the *_**en_US.properties** file, copy it to a *_**la_CO.properties** file, and then edit it to supply the locale-specific strings.
13. Each supported locale must be declared in the **SearchConfigurationProperties.xml** file. Create a Locale element for each locale: this declares which classes must be used to parse the queries and which dictionary file must be used for the locale.

```
<Locale id="fr_FR" queryParserClass="com.comergent.api.-
  appservices.search.queryParser.standard.CmgtQueryParser">
  <Analyzers>
    <Analyzer analyzerClass="com.comergent.api.appservices.-
      search.analysis.CatalogSearchAnalyzer"
      description="CatalogAnalyzer" id="search"/>
    <Analyzer analyzerClass="com.comergent.api.appservices.-
      search.analysis.CatalogSearchAnalyzer"
      description="CatalogAnalyzer" id="build"/>
  </Analyzers>
  <DictionaryFile file="CatalogDictionary.mappings"/>
</Locale>
```

To Add a Locale to an Existing Implementation

Before beginning this task, make sure that your database will support the character set used by the new locale, say fr_CA (French-Canada). In general, you should use Unicode UTF-8.

Follow these steps:

1. Update the **Internationalization.xml** file to include the new locale if it is to be used as a country default locale or as the system default locale. You can either use the System Administration application (see the *Comergent eBusiness System Administration Guide* for more details) or edit the **Internationalization.xml** file manually using a text editor (it is to be found in the *debs_home/Comergent/WEB-INF/properties/* directory). Changes to this file only take effect when the servlet container is restarted.

2. Update the CMGT_LOCALE Knowledgebase table with the new locale. You can do this by use of a SQL statement of the form:

```
INSERT INTO CMGT_LOCALES VALUES (<locale_key>, '<locale_name>',  
'<locale_description>', 'Y');
```

Use the next unused locale key value available. You must use the standard ISO 639 and 3166 standards for the language and country abbreviations. For example:

```
INSERT INTO CMGT_LOCALES VALUES (16, 'fr_CA', 'French Canadian',  
'Y');
```

3. Update the CMGT_LOCALES_NAMES Knowledgebase table with new display names for:

- other locales displayed when the user's current locale is the new locale;
- the new locale when the user's current locale is another locale.

You can do this by use of a SQL statement of the form:

```
INSERT INTO CMGT_LOCALE_NAMES VALUES ('<effective_locale>',  
'<locale_name>', '<display_name>', 'Y');
```

Both the *effective_locale* and *locale_name* values must match locales that now exist in CMGT_LOCALE. The EFFECTIVE_LOCALE column is used to match the user's current locale. When a user first logs in, their current locale is set to the value in the LOCALE_NAME column of their user record in CMGT_USER_CONTACTS. However, as they navigate through the Comergent eBusiness System, they may change their current locale.

For example, if you want to ensure that the display name for fr_CA is "French Canadian" when a user's current locale is en_US, enter:

```
INSERT INTO CMGT_LOCALE_NAMES VALUES ('en_US', 'fr_CA', 'French  
Canadian', 'Y');
```

Similarly, if you want to ensure that the display name for en_US is "Anglais États-Unis" when a user's current locale is fr_CA, enter:

```
INSERT INTO CMGT_LOCALE_NAMES VALUES ('fr_CA', 'en_US', 'Anglais  
États-Unis', 'Y');
```

4. Update the CMGT_LOOKUPS table with lookup code descriptions for the new locale. See the *Comergent eBusiness System Reference Guide* for more information.
5. If you are implementing **C3** Analyzer, then update the CMGT_ANALYZER_TEXT table to add the reports text for the new locale. See the *Comergent eBusiness System Reference Guide* for more information.
6. Add data for the new locale to *all* of the business object locale tables such as CMGT_PRODUCT_CATEGORY_LOCALE. In general, you can add data to these tables by use of a SQL statement of the form:

```
INSERT INTO CMGT_PRODUCT_CATEGORY_LOCALE VALUES
('<product_category_key>', '<locale>', '<name>', '<description>',
'<category_title>', 1, 'Y');
```

The locale value must match the locale name that you created in Step 2. You can also use the XMLLoader scripts to load this data. See "Populating the Knowledgebase" on page 96 for more information on using the XMLLoader.

In general, you must take care that you provide data for all fields of localized business objects. These fields vary from one implementation of the Comergent eBusiness System to another.

- You should review the data object schema and identify all the data objects whose Localized attribute is set to "Y".
- Identify their corresponding Knowledgebase tables: typically these will be CMGT_<OBJECT> and CMGT_<OBJECT>_LOCALE.
- Add a row for the new locale in the CMGT_<OBJECT>_LOCALE table for each data object in CMGT_<OBJECT>.

For example, suppose that you want to add a new locale fr_CA and you know that the product category business object is marked as being localized. The main Knowledgebase table is CMGT_PRODUCT_CATEGORY and the table for its locale-specific data is CMGT_PRODUCT_CATEGORY_LOCALE.

For each product category declared in the CMGT_PRODUCT_CATEGORY table you must create a new row in the CMGT_PRODUCT_CATEGORY_LOCALE table. Thus suppose that there is a product category called "Software" whose PRODUCT_CATEGORY_KEY is 17. Then you must create a localized name and description for this product category suitable for display to users using the fr_CA locale. You can use a SQL INSERT statement like this:

```
(17, 'fr_CA', 'Logiciel', 'Cette catégorie de produit contient  
hors des produits de logiciel.', 'Logiciel Catégorie', 1, 'Y');
```

7. Make sure that application directories exist under ***debs_home/Comergent/WEB-INF/web/*** for each of the supported locale families. For each locale family, *la_CO* (language-country), you must have directories ***debs_home/Comergent/WEB-INF/web/la/CO/*** populated with all the application directories used by your implementation of the Comergent eBusiness System.

Each locale family must have a distinct set of JSP pages that reflect the language and business needs for the locales of the family. These include differences in language size, layout, and flow as well as business information and flows that vary from one locale family to another.

Within a locale family, you do not need to create a full set of JSP pages. For most pages, the JSP pages are already suitably localized by the use of the text tag. All you need to do is to localize the resource bundles as described in Step 12. However, if a locale needs a special JSP page, then create the page and put it in the corresponding location in the JSP page directory structure.

The failover mechanism as described in the *Comergent eBusiness System Developer Guide* ensures that locale-specific pages are used where they are available, and that the appropriate language or system default locale pages are used otherwise.

For example, if you plan to install a full implementation for the Italian-Switzerland locale, then you should have directories: ***debs_home/Comergent/WEB-INF/web/it/CH/adirect/***, ***debs_home/Comergent/WEB-INF/web/it/CH/advisor/***, ***debs_home/Comergent/WEB-INF/web/it/CH/advisorAdmin/***, and so on under the ***debs_home/Comergent/WEB-INF/web/*** directory.

8. Under ***debs_home/Comergent/***, make sure that you create locale directories along the same lines for the static content files and copy the contents of the following directories: ***debs_home/Comergent/en/US/common/***, ***debs_home/Comergent/en/US/css/***, ***debs_home/Comergent/en/US/htdocs/***, ***debs_home/***

Comergent/en/US/images/, and **debs_home/Comergent/en/US/js/** into these for each locale.

For example, you should have **debs_home/Comergent/it/CH/common/**, **debs_home/Comergent/it/CH/css/**, **debs_home/Comergent/it/CH/htdocs/**, **debs_home/Comergent/it/CH/images/**, and **debs_home/Comergent/it/CH/js/** under **debs_home/Comergent/it/CH/**.

You should create cascading style sheets and images as appropriate for your new locale. The static Javascript files in the **debs_home/Comergent/it/CH/js/** directory should be reviewed; you will need to translate the strings displayed to users into suitable strings for the new locale. For example:

For example, when you copy over the **genericUtil.js** file to the new locale, in the **moveItem** function, you have to translate the two strings in the **alert()** calls that can potentially be displayed to users:

```
alert("You did not select an item to move. Please select one item
and click the Move Up or Move Down button.");
alert("Only one item can be selected to move up or move down.");
```

Take care that any single quotes (') in the translated strings are escaped (\').

9. Edit the **web.xml** file in **debs_home/Comergent/WEB-INF/** to add servlet mappings for the new locale. You can simply copy and paste the block of servlet mappings for the **en_US** locale and then edit all the occurrences of **/en/US/** to **/la/CO/**. For example, change:

```
<servlet-mapping>
    <servlet-name>DispatchServlet</servlet-name>
    <url-pattern>/en/US/partnerMkt/matrix</url-pattern>
</servlet-mapping>
```

to:

```
<servlet-mapping>
    <servlet-name>DispatchServlet</servlet-name>
    <url-pattern>/fr/FR/partnerMkt/matrix</url-pattern>
</servlet-mapping>
```

These mappings are required to ensure that static content such as GIF files used for buttons are displayed correctly for each locale.

10. In the new locale application directories, customize any necessary JSP pages to meet the formatting and business needs for the new locale.
11. For the new locale, create resource bundles for the locale. For the generated resource bundles defined in ***.properties** files, you should be able to start with the ***_en_US.properties** file, copy it to a ***_la_CO.properties** file for the new locale, and then edit it to supply the locale-specific strings.

12. Each supported locale must be declared in the **SearchConfigurationProperties.xml** file. Create a Locale element for each locale: this declares which classes must be used to parse the queries and which dictionary file must be used for the locale.

```
<Locale id="fr_FR" queryParserClass="com.comergent.api.-
  appservices.search.queryParser.standard.CmgtQueryParser">
  <Analyzers>
    <Analyzer analyzerClass="com.comergent.api.appservices.-
      search.analysis.CatalogSearchAnalyzer"
      description="CatalogAnalyzer" id="search"/>
    <Analyzer analyzerClass="com.comergent.api.appservices.-
      search.analysis.CatalogSearchAnalyzer"
      description="CatalogAnalyzer" id="build"/>
  </Analyzers>
  <DictionaryFile file="CatalogDictionary.mappings"/>
</Locale>
```

See the *Comergent eBusiness System Developer Guide* for more information about how locales and locale families are used to manage the display of information in locale-specific ways.

Sorting in Locales

The Comergent eBusiness System enables users to sort displayed data in a number of ways while they perform their tasks. For example, they can sort the display of partners by name or inquiry lists by inquiry list ID. When a column is sorted based on a String value, you can specify whether the sorting is performed using the binary value of the String or whether a locale-specific sort is used. This switch is set at the system level, and so the same method will be used for all such sorts.

Note: In Release 7.0.2, SQL Server support for user-locale sorting is limited. You can only set a single collating sequence and this will be used for all users.

The sorting behavior is controlled by the UseLocalizedSort element of the **DataServices.xml** configuration file. By default, the value of this element is “false”: binary sorting is used. If you set this element value to “true”, then locale-specific sorting is performed throughout the Comergent eBusiness System.

You can change the value of this element manually, simply by editing the configuration file. Alternatively, you can use the System Administration application of the Comergent eBusiness System to change this value. Note that you must stop and restart the Comergent eBusiness System for the change to take effect.

Bear in mind that if you select to sort using locale information, then you may incur a performance problem. It is always faster to use the binary sort.

Setting up a Single Locale Comergerent eBusiness System

One very common scenario is to set up a Comergerent eBusiness System which supports one locale which is not en_US. This section provides a step-by-step approach to setting up a Comergerent eBusiness System for a single locale, en_GB.

Most of these steps should be performed using the SDK, but they are written as if you are modifying the Web application itself. Perform these steps *before* running the database schema creation and data loading scripts.

1. Modify the **WEB-INF/web.xml** file so that all the servlet-mapping elements reference the en_GB locale:

```
<servlet-mapping>
  <servlet-name>DispatchServlet</servlet-name>
  <url-pattern>/en/GB/redirect/*</url-pattern>
</servlet-mapping>
```

2. Modify the **Internationalization.xml** configuration file as follows:
 - a. Change the value of the defaultSystemLocale element to “en_GB”.
 - b. Set the value of the defaultCountry element under the en element to “GB”.
 - c. Remove the other language elements under the Languages element.
3. Modify the **WEB-INF/xmldata/LocaleDataList** file to read:

```
<?xml version="1.0" encoding="UTF-8" ?>
<LocaleDataListData>
  <LocaleDataList state="INSERTED" type="BusinessObject">
    </LocaleDataList>
</LocaleDataListData>
```

4. Change the appropriate database table creation script so that only one locale is created at schema creation time. For example, the Oracle file should be changed to:

```
INSERT INTO CMGT_LOCALEE
(LOCALE_KEY, LOCALE_NAME, LOCALE_DESCRIPTION, ACTIVE_FLAG,
DB_SORT_LOCALE_NAME)
VALUES (1, 'en_GB', 'British English', 'Y', 'BINARY');
```

5. Modify the **WEB-INF/xmldata/LocaleNameDataList** file to read:

```
<?xml version="1.0" encoding="UTF-8" ?>
<LocaleNameDataListData>
<LocaleNameDataList state="INSERTED" type="BusinessObject">
  <LocaleNameData state="INSERTED">
    <DisplayName state="INSERTED">British English</DisplayName>
    <EffectiveLocale state="INSERTED">en_GB</EffectiveLocale>
    <LocaleName state="INSERTED">en_GB</LocaleName>
  </LocaleNameData>
</LocaleNameDataList>
</LocaleNameDataListData>
```

6. Modify the **WEB-INF/xmldata/LocaleCurrencyList** file to read:

```
<?xml version="1.0" encoding="UTF-8" ?>
<LocaleCurrencyListData>
<LocaleCurrencyList state="INSERTED" type="BusinessObject">
  <LocaleCurrency state="INSERTED">
    <Locale state="INSERTED">en_GB</Locale>
    <CurrencyKey state="INSERTED">11</CurrencyKey>
  </LocaleCurrency>
</LocaleCurrencyList>
</LocaleCurrencyListData>
```

7. In all of the data files that you use to load data, change “en_US” to “en_GB”. Typically, these files are to be found in **WEB-INF/xmldata/**, and you can perform a global search-and-replace to perform this task.
8. Under **WEB-INF/web/**, rename the **US/** directory to the **GB/** directory.
9. Under the top-level **en/** directory, rename the **US/** directory to the **GB/** directory.
10. If you are working in an SDK project, then change the appropriate ***.properties** files to read:

```
DEFAULT_LOCALE=en_GB
```

This will ensure that subsequent builds of the project will insert the right value of the default locale into the **Internationalization.xml** configuration file.

This chapter covers:

- "General Architectural Concerns" on page 165
- "Securing Users" on page 169
- "SSL support" on page 169
- "Installing Certificates for SSL" on page 171
- "Storing Data in Encrypted Form" on page 173

General Architectural Concerns

When you design your implementation environment, you should bear in mind the physical and network configuration of your data center, and your security policies to determine what people can perform what activities. In particular, you must distinguish carefully between what a person can do as an administrator in your data center environment, and what a person can do as a Comergent eBusiness System user.

Administration Model

This section describes the entities assumed to be present in the administrative domain (the data center) in which the Comergent System resides, including

networks, servers, and administrative roles. This is likely not an exhaustive list. It is likely that various network devices will exist within this environment, and perhaps other servers.

Networks

The following network zones are assumed to exist. These networks are connected to themselves as outlined below through gateways.

- **External network:** Directly visible from the internet. It hosts the Web servers and static content. The External network is accessible to the internet through a firewall. It is assumed that the firewall and appropriate standard security practices are sufficient to prevent shell level access from the internet. The External network has a gateway to the De-Militarized Zone (DMZ) that permits highly controlled access from the Web server to the application server(s).
- **DMZ:** This network is not directly visible from the Internet. A constrained gateway permits the Web server(s) residing on the External network to access the Application server(s) residing on this network and another, similar, gateway permits access from the DMZ network to the Internal network. The Web server routes messages to application servers through a dedicated port.
- **Internal network:** Not visible from the Internet, nor from the External network. Database resources reside here. Application servers in the DMZ connect to Database servers in this network through a constrained gateway.

Servers

The following servers are assumed to exist. The term server here indicates a software application that is more or less continuously listening on one or more network ports responding to requests received on the ports. Software servers, of course reside on computer hardware. Generally, though not necessarily, there will be a one-to-one relationship between a server software system, and a server hardware entity.

- **Web server** resides in the External network. It responds to HTTP (possibly using SSL) requests from the Internet or internal corporate Intranets.
- **Application server** resides in DMZ. Some http and https requests are delegated to the Application server for dynamically generated response. The Application server maintains connections with the Database server.
- **Database server** resides in the Internal network.

Roles

This section describes roles within the administrative context of the Comergent eBusiness System. These are roles assigned to data center personnel acting as employees or agents of the Enterprise. They are distinguished from the roles of individuals who interact directly with the Comergent eBusiness System (“Online Users”). Online users have capabilities managed directly by three Comergent System Entitlement services. Dispatch (or “MessageType”) Entitlement Service manages page flow privileges. The Access Policy Service and ACL Service together manage fine-grained data-level access.

- Database Administrator
 - Responsible for Database servers.
 - Can log into database server.
 - Can read, create, update, or delete databases, database tables, indexes, and other database resources.
 - Can create backups and restore from backups.
 - Can create Database users and manage them.
 - Does not have root level authority in server operating system.
 - Does not have direct access to Application server machine (or DMZ).
 - Does not have access as Comergent eBusiness System user.
- System Administrator
 - Responsible for server hardware, and server software.
 - Has root access to server machines within his/her zone of responsibility.
 - Has the authority to start and stop server processes.
 - As root, can read, write, update, or delete files in file systems.
 - Can back up and restore files.
 - Can create operating system level users and manage them.
 - Does not have access to log in to database server.
 - Does not have access as Comergent eBusiness System user.
- Developer
 - Responsible for preparation of deployment Web archives (WAR files).

- Has the authority to create Web archives representing the Comergent eBusiness System executable.
- Can set properties and business rules governing Comergent eBusiness System operation, including properties that configure access to the database, properties that configure the JCE Key store, and so on.
- Has the authority to create or modify the initial Comergent eBusiness System dataset. This dataset is a part of the deployment archive.
- Does not have any kind of access to the Production Database server or Application servers.
- Does not have access to the production Comergent eBusiness System as a Comergent eBusiness System user.
- Does not move code from development and QA environments to production.
- Network Administrator
 - Configures and manages network.
 - Has authority to create and assign network resources, including domain names, IP addresses, firewall policies, and so on.
 - Does not have Database server access.
 - Does not have access as Comergent eBusiness System user.

Data Center Roles

The following are assumed about data center administrative roles:

1. Roles are segregated. System Administrators cannot be Developers, Network Administrators, nor Database Administrators. Similarly, Database Administrators cannot be Developers, System Administrators, nor Network Administrators, and so on.
2. System Administrator Roles should be partitioned on network boundaries. A system administrator for the DMZ should not be a system administrator for the Internal network.
3. Data center administrators do not have Comergent eBusiness System userids with administration roles.

Securing Users

When you load either the minimal or reference data set into the Comergent eBusiness System, you create two enterprise users: admin and ERPAdmin. Before permitting the Comergent eBusiness System to go live in production, you must change the passwords of both users. If you do not do this, then it represents a serious security hole in your application.

You can change the passwords before loading the minimal data by editing the **UserContact** file to be found in *debs_home/Comergent/WEB-INF/xmldata/Minimal/* or you can log in after the Comergent eBusiness System is started and change the passwords using the administration interface. See the *Comergent eBusiness System Administration Guide* for more information.

SSL support

The Comergent eBusiness System supports communication using the SSL protocol between a user's browser and the Comergent eBusiness System. In particular, as part of your implementation of the Comergent eBusiness System, you must consider which pages (if any) should be SSL-protected.

You can ensure that pages require SSL access by setting their associated message types to a security level that requires "https". When a link is generated using the *link()* methods provided by the Comergent eBusiness System, then the command parameter is used to identify the message type, and the SecurityLevel child element is used to ensure that the appropriate schema (http or https) is reflected in the URL.

The SecurityLevel element can be used at any level in the message type group and type hierarchy. Specifying it at a message type group level means that all message types that belong to the group inherit the security level unless it is overwritten at a lower level in the hierarchy.

The Level attribute of the SecurityLevel element can take the following values:

- any: both http and https can be used to access the message type. This is the default value if nothing is specified.
- useHttp: can be accessed by http and subsequent URLs will be generated with http.
- useHttps: the page may be accessed without https, but any URL generated by the Comergent eBusiness System will specify https.

- requireHttps: any URL requesting this message type must use https, otherwise the request is rejected and an error page is displayed.

For example, suppose that the following message type is declared in **MessageTypes.xml**:

```
<MessageType Name="SysUserDetailDisplay">
  <SecurityLevel Level="requireHttps" />
  ...
</MessageType>
```

Then link("partnerMkt", "SysUserDetailDisplay") will generate the URL:

```
https://<server>:<serverSSLPort>/Comergent/partnerMkt/
matrix?cmd=SysUserDetailDisplay
```

By default, that is if no SecurityLevel is specified for a message type or for any group to which the message type belongs, then the *link()* methods will generate URLs using the same protocol used to access the referring page.

You can use the SecurityLevel element to specify that https is required to access a given page by setting the security level to "requireHttps": the Comergent eBusiness System verifies that each message type is being accessed using the appropriate protocol.

You must set the C3_Commerce_Manager.General.ServerSSLPort element in the **Comergent.xml** file to the appropriate value for your servlet container. If the servlet container is set up to use the standard SSL port (443), then you do not have to specify it. Consult your servlet container documentation for any steps that are required to set up a port to accept SSL connections.

Example Usages

In these examples, we suggest message groups and types that might be candidates to protect using the SSL protocol. In general, you need to determine the possible page flows that users can perform and identify the entry and exit message types that surround the area to be SSL-protected.

Protecting the Authenticated Environment

You should consider protecting the entire Web experience of the Comergent eBusiness System presented to authenticated users. You can do this by adding:

```
<SecurityLevel Level="requireHttps" />
```

to the EnterpriseHomeGroup and PartnerHomeGroup message groups.

Protecting the Enterprise Environment

Suppose that you want to protect your enterprise administration pages behind the https schema. You can add:

```
<SecurityLevel Level="requireHttps" />
```

to the following message types:

- LoginDisplay
- GenericLoginDisplay
- HomePageDisplay

Protecting Credit Card Information

Users are highly sensitive to passing credit card information over the Web, and you may be required to ensure that any requests that include credit card information are SSL-protected. For example, direct commerce users may enter credit card information when they edit an order header. The URL used to submit the order header information uses the OILAddrChangeProcess message type. By adding:

```
<SecurityLevel Level="useHttps" />
```

to the OILDisplayGroup message group, you ensure that when URLs are formed with message types from this group that they specify the https schema.

Protecting User Administration Pages

You should consider using the SSL protocol to protect pages in which users enter personal information. For example: add:

```
<SecurityLevel Level="requireHttps" />
```

to the UserAdminGroup message group.

Installing Certificates for SSL

To support SSL communication, you must ensure that you have determined the level of security you want to support between users and your Comergent eBusiness System and between the Comergent eBusiness System and any of your partners' enterprise servers. You can enable SSL communication between users' browsers

and the enterprise server and between the enterprise server and one or more of your partners' enterprise servers.

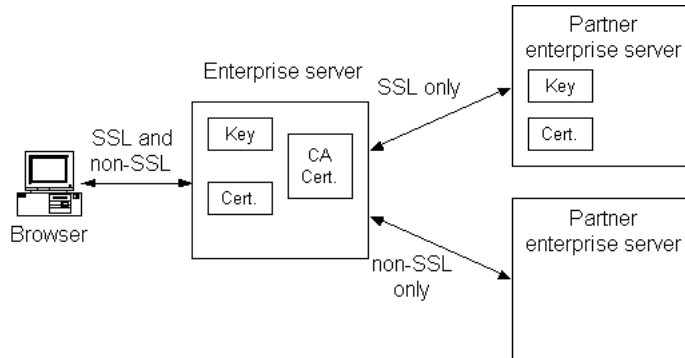


FIGURE 12. SSL Communication in the Comergent eBusiness System

Overview

When two systems elect to use the SSL protocol to communicate, the entity that initiates the communication is referred to as the client and the other entity is the server. For example, if the enterprise server is set up to support SSL communication with users' browsers, then the browser acts as the SSL client and the enterprise server is the SSL server. If the enterprise server and a partner's enterprise server use SSL to transfer price and availability requests, then the enterprise server is acting as the SSL client and the partner's enterprise server is the SSL server.

The SSL protocol requires that the SSL client maintains certifying authority certificates from certificate authorities from whom they accept certificates. When a client attempts to open an SSL communication session with an SSL server, the server must send to the client its certificate and key. The client may choose to verify against the certifying authority certificate, and then uses the key to encrypt messages sent back to the server.

A client makes a request to open an SSL communication by posting to the server using the https schema: that is, by using a URL of the form

```
https://myserver.com:<SSL port>
```

Consequently:

- If you want your installation of the enterprise server to support SSL communication from Web browsers, then you must obtain a server certificate and server key and use the appropriate servlet container mechanism to specify an SSL port.

- If you want to enable SSL communication between an enterprise server and a partner's enterprise server, then the partner's enterprise server must obtain a server certificate and server key. The partner's enterprise server must be configured to receive messages from your enterprise server on an SSL port. Your enterprise server must be configured to accept the SSL certificates offered by the partner server. In general, if the partner server's certificates match the domain of the partner server's URL, then the enterprise server accepts them automatically.

Storing Data in Encrypted Form

This section covers:

- "General Setup" on page 174
- "Changing Encryption Algorithms" on page 177
- "Key Stores and System Initialization" on page 179
- "Wrapper Classes for Standard Algorithms" on page 180
- "Key Rotation" on page 180
- "Release 6.0 and Earlier Releases" on page 184

The Comergent eBusiness System lets you store sensitive business data in the Knowledgebase in an encrypted form. This is done by setting the Encryption attribute of the corresponding DataElement to "1-way" or "2-way". See the *Comergent eBusiness System Reference Guide* for more information.

<p>Attention: If you deploy the reference implementation of the Comergent eBusiness System without making changes to the schema, then note the following:</p> <p>Credit card numbers stored as part of a user's profile are 2-way encrypted. This means that a dcmsKey.ser file is created on your system.</p> <p>If you upgrade the Java Virtual Machine (JVM) at any time after creating encrypted data, then you should check that the data can be retrieved correctly. For example, if upgrading the JVM means that the .jceKeystore file is regenerated, then 2-way encrypted data will have to be recovered.</p>

Securing data in the persistent storage system should be considered when the data travels over insecure internal or external networks or when access to the database server cannot be restricted to authorized individuals. In general, it is preferable to secure data using the facilities provided by the database server. These are likely to provide a more comprehensive and higher performance solution.

You must decide which fields are to be encrypted before loading the data and creating more data. In general, you cannot change to using encrypted data for a data field after any data objects have been created of that type.

Attention: You cannot encrypt data that is used in C3 Analyzer reports without breaking the reports that use the data. You can identify which database columns are used in reports by reviewing the view creation scripts. All report data is accessed using views and so the view scripts provide a complete list of the columns accessed by reports.
--

General Setup

This section describes the basic steps to implement data encryption.

Note: Release 6.3 introduced more flexible encryption support than previous releases. If you are working on an earlier release, see "Release 6.0 and Earlier Releases" on page 184.
--

You should use JDK 1.4.2 or a subsequent compatible version because this has the Java Cryptography Extension (JCE) built in.

1. You should download the Unlimited Strength Jurisdiction Policy Files 1.4.2 available from the SUN Java Web site. Follow the instructions provided by the **Readme.txt** file to install the JCE jurisdiction policy JAR files into your Java environment.
2. To encrypt data that is to be stored in the Knowledgebase, you must specify the encryption method that is to be used:
 - For two-way encrypted fields this must be a symmetric encryption algorithm so that the data can be retrieved in its unencrypted form.
 - For one-way encrypted fields, you must use a digester. This must effectively provide a highly probable guarantee that if two source strings are digested and the digested strings are the same, then the source strings must have been the same to start with.

At any one time, the data services layer determines that only one active symmetric encryption algorithm and only one active digester can be in use.

- You can switch from one symmetric encryption algorithm to another as your encryption needs change. Data encrypted using an earlier encryption algorithm can be retrieved, and if it is re-saved, then it is persisted using the appropriate active symmetric encryption algorithm. See "Changing Encryption Algorithms" on page 177 for more information.

- Once you have selected your digester, then this cannot be changed. By its nature, data encrypted using a digester cannot be retrieved in order to re-encrypt it using a different digester.

You cannot change the status of data fields from encrypted to unencrypted or the other way round. In summary:

1. Decide which data fields are to be encrypted. You cannot add or remove fields from this list once it is set up and data objects have been persisted using the encryption methods.
2. Decide which of these fields are to be one-way encrypted and which are to be two-way encrypted.
3. Select a secure digester to be used for one-way encryption. You must keep this digester.
4. Select a secure symmetric encryption algorithm: you can change this later if your encryption needs change.

Symmetric Encrypter

You declare the active symmetric encryption algorithm using the `TwoWayEncrypter` element in the **DataServices.xml** file. For example:

```
<TwoWayEncrypter>JCE DES</TwoWayEncrypter>
```

The value of this element must match the `Name` attribute of a `SymmetricEncrypter` element declared in the **CryptographyService.xml** configuration file.

```
<SymmetricEncrypter Name="JCE DES" Tag="DES"
  Class="com.comergent.dcm.cryptography.JCESymmetricEncrypter"
  KeyManager="JCEKeyManager" KeyName="myKey">
  <Algorithm Name="DES" Provider="SunJCE"/>
</SymmetricEncrypter>
```

Each `SymmetricEncrypter` element declared in the **CryptographyService.xml** file can be used to encrypt and decrypt data.

- The `Name` attribute in the element is used to identify the symmetric encrypter in the `TwoWayEncrypter` element. The `Name` attribute must be unique among all the `SymmetricEncrypter` and `Digester` elements declared.
- The `Tag` attribute of the `SymmetricEncrypter` element is used to prefix the encrypted strings in the persistent data store. The `Tag` attribute must be unique among all the `SymmetricEncrypter` elements declared, but the same `Tag` value can be used for a `Digester`. For example, if the string

“ajones” is encrypted to “hg\$y&7606(7gfj” by the symmetric encrypter whose tag is “DES”, then the value stored in the database is “DES:hg\$y&7606(7gfj”. In this way, each stored encrypted value provides an indication of which symmetric encrypter can be used to decrypt it.

- The Class attribute of each SymmetricEncrypter element specifies the class to be used to perform the encryption and decryption: this class and its dependent classes must be in the Comergent eBusiness System classpath. The specified class must implement the com.comergent.api.dcm.cryptography.SymmetricEncrypter interface.
- If the symmetric encryption algorithm requires a key manager, then the SymmetricEncrypter element also specifies its key manager using the KeyManager attribute. The value of this element must match the Name attribute of one of the declared KeyManager elements.

```
<KeyManager Name="JCEKeyManager"
  Class="com.comergent.dcm.cryptography.JCEKeyManager">
  <Algorithm Name="DES"/>
</KeyManager>
```

Each KeyManager element in the **CryptographyService.xml** configuration file declares the class to be used to manage keys for a symmetric encrypter. Typically, these classes are used to access keys managed in a key store. The name of the key to be retrieved from the key store is specified by the KeyName attribute of the SymmetricEncrypter element. Thus, by having two SymmetricEncrypter elements declaring the same Class attribute, but different KeyName attributes, you can use different keys to encrypt data. See "Key Stores and System Initialization" on page 179 for more information about key stores and how keys can be retrieved when the Comergent eBusiness System is starting up.

Digester

You declare the active digester using the OneWayEncrypter element in the **DataServices.xml** file. For example:

```
<OneWayEncrypter>MD5</OneWayEncrypter>
```

The value of this element must match the Tag attribute of a Digester element declared in the **CryptographyService.xml** configuration file.

Each Digester element declared in the **CryptographyService.xml** file can be used to encrypt data.

- The Name attribute in the element is used to identify the digester in the OneWayEncrypter element.

- The Tag attribute is used to prefix the encrypted strings in the persistent data store. The Tag attribute must be unique among all the Digester elements declared, but the same Tag value can be used for a SymmetricEncrypter element. For example, if the string “ajones” is encrypted to “Ta\$y&%lN7gL5” by the digester whose tag is “MD5”, then the value stored in the database is “MD5:Ta\$y&%lN7gL5”. In this way, each stored encrypted value provides an indication of which digester was used to encrypt it.
- The Class attribute of each Digester element specifies the class to be used to perform the encryption: this class and its dependent classes must be in the Comergent eBusiness System classpath. The specified class must implement the com.comergent.api.dcm.cryptography.Digester interface.

Default Symmetric Encrypter and Digester

By default, Release 7.0 and higher of the Comergent eBusiness System uses the one-way and two-way encryption schemes used in the Sun JCE implementation: these reference MD5 and DES respectively. Earlier releases used the legacy encryption schemes provided by the crysec packages. See "Release 6.0 and Earlier Releases" on page 184 for further information. These schemes are identified by empty Tag attributes (that is, Tag=“”).

Note:	You should consider replacing the legacy digester with either SHA or MD5 digesters. Both offer a higher level of security against cryptographic attack. However, you must make the decision to change to a different digester before implementing the Comergent eBusiness System. See "One-Way Encrypted Data" on page 178.
--------------	---

Changing Encryption Algorithms

You can change the symmetric encryption algorithm used if your encryption needs change. If you do this, data that has previously been encrypted using the earlier symmetric encryption algorithm is not lost.

Note:	You must use JDK 1.4.2 or a subsequent compatible version to use AES encryption.
--------------	--

Two-Way Encrypted Data

Suppose that a data field of a data object is marked for two-way encryption and the active symmetric encryption scheme is set to “DES”. If a new data object is persisted, then the data field value is set to something like “DES:hfd8kUH9*”. Suppose that you decide to switch to using the symmetric encryption algorithm

identified by the Tag value “AES”, and so you set the TwoWayEncrypter element to “AES” in **DataServices.xml** file. For example:

```
<TwoWayEncrypter>JCE AES</TwoWayEncrypter>
```

If new data objects are persisted, then their data is encrypted using the AES symmetric encryption scheme. If the earlier data object is restored, then the encryption service recognizes that the field was encrypted using the DES encryption schema, and invokes the corresponding symmetric encrypter class to decrypt it. If the restored data object is subsequently persisted, then the AES scheme is used to perform the encryption and the value of the data field will be something like “AES:8(HH\$DyGK” in the persistent data store.

You can also perform “key rotation” to update all your encrypted data to make use of a new key. See “Key Rotation” on page 180 for more details.

One-Way Encrypted Data

Data that is encrypted using a digester is not intended to be used to retrieve the original value. You cannot easily change digesters once data has been encrypted using your choice of digester.

For example, suppose that you choose to one-way encrypt user passwords in the Password field of the UserContact data object, and suppose that you have chosen to use the legacy digester for this purpose. If subsequently you decide to change digesters to the more secure SHA or MD5 digesters, then you would have to proceed along these lines:

1. Notify users that their passwords will be changed at a certain date.
2. At that date, stop the Comergent eBusiness System, and set the OneWayEncrypter element to the new Digester name. Suppose that the Tag for the new digester is “SHA”.
3. Generate a new password value for each user: say, their username and a randomly selected integer: for example, “ajones67854”.
4. Offline, use the new digester to encrypt the new password for each user: suppose that “ajones67854” is encrypted to “hjkYF*&5NF0”.
5. Using a SQL script, update the CMGT_USER_CONTACT table to enter the encrypted form of their password for each user:

```
UPDATE CMGT_USER_CONTACTS SET PASSWORD = 'SHA:hjkYF*&5NF0' WHERE  
USER_NAME = 'ajones';
```

6. Restart the Comergent eBusiness System.

7. Notify each user by email that their password has now changed, and give them the new unencrypted value. Ask each user to log in using their new password, and ask them to change their password immediately.

Note that any other data in the Comergent eBusiness System that was also one-way encrypted (such as credit card numbers) would be rendered inaccessible and would have to be re-created if required.

Key Stores and System Initialization

Almost all encryption schemes use a key store to hold the keys used to encrypt and decrypt data. In symmetric schemes the same keys are used to both encrypt and decrypt data. Consequently, it is important that you take great care to protect your key stores and ensure that they are not corrupted or deleted.

Attention: Loss or corruption of your key store can lead to complete loss of your encrypted data.
--

Each encryption scheme make use of different types of keys and key stores, and you must consult the documentation that comes with your choice of encryption scheme carefully. Typically, the process is to create a key store, and then generate keys that you add to the key store. Each key has a name that is used to retrieve the key from the key store.

When the Comergent eBusiness System is started or re-started, it must retrieve the appropriate keys from a key store. If it fails to do so, then the Comergent eBusiness System fails to initialize and will not permit any logins.

Key stores and keys in the key store can be encrypted. If you choose to encrypt either, then as part of the initialization process, the cryptography service must decrypt them to retrieve the keys for the symmetric encrypters.

Attention: Take extreme care in encrypting key stores. A key store is effectively impossible to decrypt without the appropriate passwords. Data will be impossible to retrieve if the keys in the key store are inaccessible.
--

The cryptography service is initialized during the initialization of the InitServlet class. It attempts to decrypt the key stores and keys for each symmetric encrypter using the password "Comergent". If it fails for one or more of the symmetric encrypters, then the initialization of the Comergent eBusiness System stops at this point. Requests posted to the DispatchServlet (the main servlet class used to process requests), are sent a 503 response: Service Unavailable.

You can complete initialization of the cryptography service and hence of the whole Comergent eBusiness System by posting a request to the `InitServlet` that includes the relevant parameters: typically, for each symmetric encrypter the passwords used to encrypt the key store and the key. For example if one symmetric encryption scheme requires a `keyStorePassword` parameter and a `keyPassword` parameter, and a second scheme used just a `storePassword` parameter, then the following post would provide the initialization information:

```
http://<machine:port>/Comergent/init?keyStorePassword=password&key-  
Password=password&storePassword=password
```

Wrapper Classes for Standard Algorithms

SymmetricEncrypter Class

The JDK 1.4 provides implementations of standard symmetric encryption algorithms such as AES and DES. The Comergent eBusiness System enables you to use these through the `JCESymmetricEncrypter` class. This class implements the `SymmetricEncrypter` interface and so may be specified in the `SymmetricEncrypter` element.

Digester Class

The JDK 1.4 provides implementations of standard digester algorithms such as MD5 and SHA. The Comergent eBusiness System enables you to use these through the `JCEDigester` class. This class implements the `Digester` interface and so may be specified in the `Digester` element.

Key Rotation

Key Rotation Procedure

This procedure describes how to rotate encryption keys that protect data on the Comergent eBusiness System. The procedure is designed so that it can be executed as needed or incorporated as an operating system level cron job. It must be executed from a shell on one of operation systems because it references files located on these systems.

Background

The Comergent eBusiness System can be configured to efficiently encrypt selected persistent data using any of a variety of Symmetric Encryption algorithms. The purpose of this feature is to protect confidential data from internal users who may need access to the Comergent Knowledgebase.

The encryption keys are stored in a password-protected keystore. A keystore is usually a file in the filesystem of the application server. The identical keystore must be present on all members of a clustered system. This can be arranged by placing the keystore on a shared filesystem or by copying the keystore by hand whenever it changes.

A Comergent eBusiness System configuration file maintains a mapping between keystore keys and internal logical “encrypters”. This file, named, **CryptographyService.xml**, is colocated with preferences files, usually in **user_home/cmgt/debs/conf/**. Again, it must be identical among members of a cluster.

The Comergent eBusiness System tags encrypted values. By this means it knows which encrypter encrypted a particular value.

Why Rotate?

The Comergent eBusiness System is designed to use a standard encrypter using an internal keystore during development and deployment. This standard encrypter encrypts using 56-bit DES encryption, which is adequate for those purposes. It is not, however recommended for a production system for two reasons: the keystores on the production systems should not be shared with development systems, because this compromises the data protected by the keys, and production systems should have stronger encryption.

Many customers may want to rotate keys at regular intervals, to limit the window of vulnerability from any compromise. If keys are rotated on a monthly bases, for example, then the payoff from acquiring a key is limited to that month.

Basic Process

The basic key rotation process has three steps:

1. Create a new encrypter by cloning an existing encrypter.
2. Change the default encrypter reference to point to the new encrypter.
3. Update values stored in the database to use the new encrypter. This step may take some time, depending on the number of encrypted values in the database, but can be accomplished over time, since any old values will continue to be decryptable with the old encrypter and new values will employ the new encrypter.

Detailed Process

Begin by creating a new key.

1. Log in as the user running the servlet container.
2. Open a shell window and change directory to the home directory. We refer to this directory as *user_home*.
3. You must select a new unique name for the new encrypter and key, and a new tag. These can all be the same. The tag should be short. We suggest these incorporate temporal information or sequence number. For example, “AESyymm”, where “yy” is the year and “mm” the month. You must also determine the encryption algorithm: AES or DESede (“triple DES”) are standard for business applications.
4. Locate the tool **cmgt-cryptography-tool.jar** in the file system. If you have installed Release 7.0.2 into the SDK, then you will find the JAR file in *sdk_home/releases/debs-7.0.2/image/install/*.
5. Copy this JAR file to *user_home*.
6. The base configuration provides a standard selection of encrypters that are likely to meet most needs. Therefore, creating a new encrypter means cloning an existing encrypter in most cases. To see the configured encrypters for your system, execute:

```
java -jar cmgt-cryptography-tool.jar list
```

7. To create a new encrypter, execute, for example:

```
java -jar cmgt-cryptography-tool.jar clone-encrypter JCE_AES  
AES0805
```

The above command will clone the JCE_AES encrypter and name it AES0805. The tag and key names will also be set to AES0805 in this example, but if a different tag or key name is desired it can be set on the command line.

8. You can verify the new encrypter by executing:

```
java -jar cmgt-cryptography-tool.jar info AES0805
```

You will see something like this:

```
AES0805: Name=AES0805 Tag=AES0805 initialized=true algorithm=AES  
keymanager=JCEKeyManager keyname=AES0805 provider=SunJCE
```

Changing the Default Encrypter

9. To change the default encrypter, we need set the alias to the new encrypter:

```
java -jar cmgt-cryptography-tool.jar alias DefaultEncrypter
```

AES0805

If you are working with a clustered configuration with no shared filesystem, then the keystore and configuration files must be manually synchronized.

10. To do this, you must first activate the key. Do this by encrypting something:

```
echo "hello" | java -jar cmgt-cryptography-tool.jar encrypt
```

11. You must copy the keystore and configuration file to each of the cluster members. The cryptography service configuration file is colocated with Comergent preferences and is named **CryptographyService.xml**. By default, this is in *user_home/cmgt/debs/conf/*, where *user_home* is the home directory of the user that starts the Comergent eBusiness System Web application. The location of the keystore can be identified with the following command:

```
java -jar cmgt-cryptography-tool.jar info JCEKeyManager
```

Note that the location of the keystore may be specified by using the `KeyStorePath` attribute of the appropriate `KeyManager` element in the **CryptographyService.xml** configuration file. For example:

```
<KeyManager Class="com.comergent.cryptography.JCEKeyManager"
  Name="JCEKeyManager" KeyStorePath="cmgt/debs/conf/.keyStore">
</KeyManager>
```

The path may be specified as a path relative to the *user_home* directory or as an absolute path.

12. In order for this change to take effect it is currently necessary to cycle the servlet container. Use techniques appropriate to your servlet container to restart it.

Updating Existing Database Ciphers.

At this point, all new values for encrypted columns in the database will be encrypted with the new encrypter, but values stored with the old encrypter are unmodified. We need to update these values. In particular, passwords protected by encryption (Encryption="2-Way" in the schema file) will no longer work.

13. First identify all primary beans that have encrypted properties. This can be accomplished by identifying Elements in `DsDataElements` with Encryption="2-Way", then searching the data object schema files for `<DataElement>` references to those elements. More than one bean may refer to the same encrypted column. For example, the `UserContactBean` and the `UserBean` both refer to the `CMGT_USER_CONTACTS` table and the `PASSWORD` column within it. In this case, we obviously need only update one of these bean types.

14. Locate the cipher-update script in your installation: **cipher-update.sh** or **cipher-update.bat**, depending on your shell. If you have installed Release 7.0.2 into the SDK and built your project, then you will find the script in **sdk_home/workspaces/project/WEB-INF/scripts/**.
15. Copy the script to the appropriate runtime location:
 - a. If you are working in the SDK, then copy the script to **sdk_home/builds/project/**.
 - b. If you are working in a running deployment environment, then copy the script to **debs_home/Comergent/**.
16. For each primary bean that has encrypted properties, execute the cipher-update script. You must provide the name of the bean and the name of the key field used to retrieve each instance of the bean. For example:

```
cypher-update OrderBean ShoppingCartKey
```

or

```
cypher-update UserContactBean Userkey
```

This may take a long time if the database is very large, so this step is best executed during a period of low Web activity.

Release 6.0 and Earlier Releases

To perform encryption, the Comergent eBusiness System makes use of an encryption algorithm provided by the crysec Java package. The algorithm uses a random key to seed the encryption. The package looks for a file called **dcmsKey.ser** in the home directory of the user being used to run the servlet container. If the file exists, then the value it contains is used as the seed. If the file does not exist, then the algorithm creates a random seed and writes it to a new file called **dcmsKey.ser** in the home directory of the user running the servlet container.

This file is used to encrypt and decrypt all data fields whose Encryption attributes are set to “1-way” or “2-way”. Bear in mind, that if you change this file for any reason, then you will *not* be able to run the Comergent eBusiness System if any data is encrypted. Similarly, if you decide to change the user used to run the servlet container, then make sure that you copy the **dcmsKey.ser** file over to the user’s home directory *before* starting the servlet container or accessing the Comergent eBusiness System.

- In a Windows 2000 installation of the Comergent eBusiness System, the user’s home directory is typically **C:\Documents and Settings\<username>**.

- In a UNIX installation of the Comergent eBusiness System, the user's home directory is typically **/home/<username>/**.

Clustering

In a clustered environment, you must make sure that every machine in the cluster uses the same copy of **dcmsKey.ser**. You should start one machine in the cluster first, make sure that the **dcmsKey.ser** file is created, and then copy it over to the home directories on the other cluster machines before starting each of these up and adding them to the cluster.

Storing Passwords

To store user passwords in the Knowledgebase as encrypted strings, follow these instructions. You must perform Step 1 *before* loading the data. Note that you cannot mix unencrypted and encrypted passwords: you must decide in advance whether you will encrypt passwords, and this choice applies to all users.

1. Set the Encryption attribute of the UserAuthenticator DataElement to "1-way" or "2-way". The DataElements are located in the file specified by the DsDataElements element of the **DataServices.xml** file.
2. Load the minimal data or reference data.
3. Use one of the created users to log in to the Comergent eBusiness System to create new users. All users created from now on will have encrypted passwords.

This chapter provides an overview on integrating your Comergent eBusiness System with other systems.

Implementing Punchout to an External System

In Release 7.0.2 of the Comergent eBusiness System, you can integrate other external systems with the enterprise server to add functionality to your e-commerce system. In general, we support:

- the ability of users to “punch out” from the Comergent eBusiness System to an external system.
- the ability of users to “punch in” from an external system into the Comergent eBusiness System.

Punching Out

The following illustration is one example of a punchout process from the Comergent eBusiness System to a configuration system.

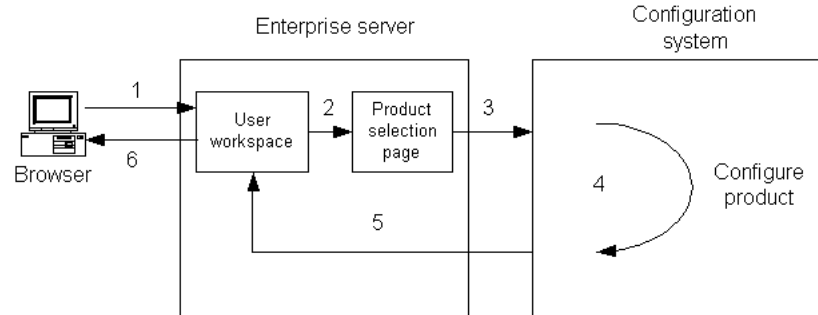


FIGURE 13. Punchout Process

Typically, users proceed as follows:

1. Log in to the Comergent eBusiness System.
2. From the user home page or from a product inquiry list page, click a link to get to a product selection page.
3. Click a product link to punch out to the configuration system.
4. Complete the configuration process.
5. At the end of the configuration process, click a link to return (“punch in”) to the Comergent eBusiness System.
6. The newly selected and configured product is added to a product inquiry list.
 - If the punchout process is initiated from a product inquiry list, then the product inquiry list detail page is redisplayed with the selected product in it.
 - If the punchout process is initiated from the user home page, then the user is prompted either to select one of their existing product inquiry lists or to create a new product inquiry list.

To Implement the Punchout Mechanism

1. Create a product catalog JSP page.

Design this template so that when it is used to display a page of configurable products, each product link contains a returnUrl parameter as well as any information that the product configurator requires. The returnUrl is used by the product configurator to return session information to the Comergent eBusiness System once configuration is complete.

For example, suppose that your product catalog page contains the following text:

```
href="http://myconfigurator.mycompany.com/configurator?
Model=MX250&ReturnURL=DYNAMIC_URL/ConfiguratorPunchInDisplay&
SESSION_ID&CART_KEY"
```

Then, at runtime the generated HTML must include the substitution of the DYNAMIC_URL to point to the standard Comergent eBusiness System port. Similarly, the SESSION_ID and CART_KEY must be substituted for the session ID and cart key (if it exists). Thus, the dynamically-generated HTML might include:

```
href="http://myconfigurator.mycompany.com/configurator?
Model=MX250&
ReturnURL=http://mydebs.mycompany.com:9991/-
ConfiguratorPunchInDisplay&
SessionID=hgkjg435jk&
CartKey=247"
```

2. Make sure that the configurator is able to preserve the returnUrl and other parameters as it performs the configuration process.

At the end of the configuration process, the “Add to cart” button must be capable of:

- *Either*, generating a Redirect directive that uses the returnUrl to post the configured product back to the Comergent eBusiness System together with the session ID and cart key (if it exists).
- *Or*, constructing the configured product using Javascript and then posting the configured product together with the session ID and cart key (if it exists) directly to the Comergent eBusiness System.

The configured product data is returned in the form of an XML document whose data and structure must convey the information required by the Comergent eBusiness System.

3. Specify a DTD in order to validate that the XML document corresponds to the correct structure.

A sample XML document is presented here:

```
<?xml version='1.0'?>
<!DOCTYPE Config2BOM SYSTEM 'src/data/messages/Config2BOM.DTD'>
<Config2BOM>
  <LineItem>
    <SKU>MXDS-7500</SKU>
    <Description></Description>
    <Quantity>1</Quantity>
  </LineItem>
  <LineItem>
    <SKU>MX-IN500</SKU>
    <Description>500 MHz Processor</Description>
    <Quantity>1</Quantity>
  </LineItem>
  <LineItem>
    <SKU>MX-LNXA</SKU>
    <Description>Linux Office Suite</Description>
    <Quantity>1</Quantity>
  </LineItem>
</Config2BOM>
```

The following fragment of Javascript and HTML adds this product to a form before the form is posted to the Comergent eBusiness System:

```
<HTML>
<script language="JavaScript">
function addConfiguredProduct ()
{
  document.Config2Form.XML.value="<?xml version='1.0'?>
  <!DOCTYPE Config2BOM SYSTEM 'src/data/msgs/Config2BOM.DTD'>
  <Config2BOM>\
  <LineItem>\
  <SKU>MXDS-7500</SKU>\
  <Description>\
  (null)\
  </Description>\
  <Quantity>1</Quantity>\
  </LineItem>\
  <LineItem>\
  <SKU>MX-IN500</SKU>\
  <Description>\
  500 MHz Processor\
  </Description>\
  <Quantity>1</Quantity>\
  </LineItem>\
  <LineItem>\
```

```
<SKU>MX-LNXA</SKU>\
<Description>\
Linux Office Suite\
</Description>\
<Quantity>1</Quantity>\
</LineItem>\
</Config2BOM>;
}
</script>

<BODY onLoad="addConfiguredProduct()">
<FORM NAME="Config2Form"
  ACTION="http://mydebs.mycompany.com:9991/-
  ConfiguratorPunchInDisplay"
  METHOD="POST">
<INPUT TYPE="HIDDEN" NAME="SessionID" Value="hgkjg435jk">
<INPUT TYPE="HIDDEN" NAME="CartKey" Value="247">
<INPUT TYPE="HIDDEN" NAME="XML" Value="">
<INPUT TYPE="SUBMIT" VALUE="Add Product">
</FORM>
</BODY>
</HTML>
```

4. Modify the Comergent eBusiness System configuration and write appropriate controllers, BLCs, and JSP pages to process the punch in request.

Typically, this includes writing a combination of controllers and BLCs that insert the configured product into a product inquiry list. If a product inquiry list key is not provided, then the controller and BLC must allow for a page that offers the user the choice of adding the product to an open product inquiry list or adding it to a new product inquiry list created by the BLC.

Punching In

You can write an entry point into the Comergent eBusiness System from an external Web application or from one Comergent eBusiness System application to another simply by specifying a URL that points to the system.

Authentication

When a user accesses a URL within the Comergent eBusiness System and if no valid session information is available, then the browser is re-directed to the appropriate login page. The original URL is not stored, so after logging in the user must navigate to the intended page.

Specifying the C3 Advisor Starting State

The C3 Advisor application supports the ability to specify additional state information in the URL accessing C3 Advisor for the first time. By creating a URL with additional state information, you can enable users to punch in to a C3 Advisor session at a predetermined questionnaire page and with predetermined answers. See the *Comergent eBusiness System Administration Guide* for further information about C3 Advisor concepts.

The C3 Advisor punch in URL can take an optional parameter called startstate. The URL may specify more than one value for the startstate parameter. You can specify a value of a startstate parameter as follows:

- startstate=page_<name of questionnaire page>
- startstate=answer_<question name>_<answer name>

For example, suppose the following is a URL used to punch in to C3 Advisor:

```
http://<server:port>/Comergent/debs/matrix?cmd=advisor&
startstate=page_International&
startstate=answer_Enterprise_Networking&
startstate=answer_UserType_Expert
```

This URL provides the C3 Advisor application with a specified start page: International; and provides two answers that will be used in firing rules: Networking and Expert associated with the questions Enterprise and UserType respectively.

This URL could be created by means of the scriptlet:

```
<A HREF="<%= link ("catalog", "advisor",
"startstate=page_International&
startstate=answer_Enterprise_Networking&
startstate=answer_UserType_Expert") %>">
```

Note that the start page is identified by its *name*: when you create C3 Advisor questionnaire pages, each questionnaire page is given a name. If there is no questionnaire page with the specified name, then the parameter is ignored. If there is no question whose name corresponds to the question name, then the startstate parameter is ignored. Similarly, if there is no answer whose name matches the answer name specified in a startstate parameter, then it is ignored.

If there are spaces or special characters in the names of pages, questions, or answers, then you need to encode the parameters before including them in the *link()* method. For example:

```
<% String temp_ParameterString = "startstate=" +
    java.net.URLEncoder.encode("Start Page"); %>
```



```
<A HREF="<%= link ("catalog", "advisor",  
temp_ParameterString) %>">
```

Note the following for the behavior of **C3** Advisor when startstate parameters are provided.

TABLE 13. C3 Advisor Startstate Behavior

startstate	startstate answers specified	startstate answers not specified
startstate page specified	The answers are set in the state. C3 Advisor fires its rules until a rule is fired that specifies a questionnaire page. At this point, the C3 Advisor displays the questionnaire page specified by the start state parameter.	The C3 Advisor displays the questionnaire page specified by the start state parameter.
startstate page not specified	The answers are set in the state. C3 Advisor fires its rules until a rule is fired that specifies a questionnaire page. At this point, the C3 Advisor displays the questionnaire page specified by the rule.	C3 Advisor displays its standard start page.

This chapter describes how to integrate **C3 Configurator** with other e-commerce applications. These applications may be other applications in the Comergent eBusiness System or third-party e-commerce applications already installed on your e-commerce site. It covers:

- "Punch into C3 Configurator URL Definition" on page 196
- "DTDs for the C3 Configurator" on page 198
- "Sample XML for C3 Configurator" on page 212
- "Model Export and Import XML Example" on page 215

Overview

Punching in to the C3 Configurator

You can use the **C3 Configurator** as a stand-alone configurator application. You can integrate it into your existing e-commerce system so that users can select products, configure them, and add the configured products to their cart as a seamless experience. All you have to do is to ensure that the correct information is passed to the **C3 Configurator** as the user begins to configure a product, and that the right information is passed back into your e-commerce application.

Follow these steps:

1. Determine the page(s) in your e-commerce application from which you want users to initiate their configuration session. Typically, these will be the pages in your product catalog or shopping cart application on which customers select products or view their selection of products.
2. On each such Web page, add a button or link with the information set in the URL as described in "Punch into C3 Configurator URL Definition" on page 196. In particular, this URL must include the URL that the **C3** Configurator will use to return the user to your e-commerce application once they have completed their configuration session.
3. Ensure that your e-commerce application can process the returned post from the **C3** Configurator. The configured model is returned in the form of an XML message that conforms to the DTD described in "DTD for Punchin and Punchout Messages" on page 209.
4. Create the models used by the **C3** Configurator to render the models and determine what selections are available during the configuration session. These models can be created using the Comergent eBusiness System Visual Modeler or they may be created by an other application. If you use an external application to create models, then you must import them as XML files into the Comergent eBusiness System using the Visual Modeler. You then use the Visual Modeler to translate the models ready for the **C3** Configurator to use. The imported XML files must conform to the DTD described in "DTD for Model Import" on page 199. An example model file for import is given in "Model Export and Import XML Example" on page 215.
5. Determine whatever logic is required to ensure that the correct model is used for each configuration session. The Comergent eBusiness System uses a mapping from each configurable product to its corresponding model, but you can use other mechanisms too.

Punch into C3 Configurator URL Definition

In this section, we provide the form of the URL used to punch in to the **C3** Configurator and some example URLs for punching into **C3** Configurator from **C3** Advisor and from **C3** Order Manager. If you are not using the Comergent eBusiness System, then your e-commerce application must generate the appropriate URLs to punch in from the Web pages you use.

Standard Punchin URL

To perform the punch-in to the **C3** Configurator, you invoke the following message type with a URL of this form:

```
http://<Machine name:port>/Comergent/en/US/direct/matrix?  
cmd=configure
```

The following information must be part of the inbound post into the **C3** Configurator:

1. The name of the model that the **C3** Configurator should invoke. This parameter is mandatory.
2. The return URL is a mandatory parameter. Depending on your e-commerce application, you may need to include a session ID so that the user can continue their work in the e-commerce application.
3. Parameters passed into **C3** Configurator which may be used for rules that set default selections or which generate messages. In a standard implementation of **C3** Advisor and **C3** Configurator, answers selected in the **C3** Advisor questionnaire are passed into the **C3** Configurator. In general, these parameters are optional.

To invoke this message type, you must specify the following parameters in the HTTP request:

- **Model:** the model name to uniquely identify the model used by the **C3** Configurator.
- **ReturnURL:** used to determine how to return the configured product to the e-commerce application. Depending on your e-commerce application, you may need to include a session ID in order that the user can continue their work in the e-commerce application.
- **picks:** an array of strings such as picks made during a **C3** Advisor session.
- **ConfigXML:** information about a current configuration in XML. This must conform to the DTD described in "DTD for Punchin and Punchout Messages" on page 209.

Punching out from a Product Detail Page

For example, this is the form of a URL used to initiate a configuration from a product detail page:

```
http://<Machine name:port>/Comergent/en/US/direct/matrix?  
cmd=parametersToConfig&productID=MXDS-7500
```

The following parameters are set in the HTTP request:

- `productID`: when the request is received by the Comergent eBusiness System, it maps the specified product to the model used to configure the product.
- `advisor.picks`: these optional parameters set information about picks made during a *C3* Advisor.

When the Comergent eBusiness System receives this request, it redirects the request to the URL described in "Standard Punchin URL" on page 197 populating the parameters as necessary.

Punching out from an Inquiry List Page

From an inquiry list page, when the users click on **Configure** for a particular product, the request is posted to the following URL:

```
http://localhost:8080/Comergent/en/US/direct/matrix?  
cmd=ConfiguratorPunchOutOrders
```

The following parameters are set in the HTTP request:

- `shoppingCartKey`: this key is used to identify the inquiry list to which the product has been added.
- `lineKey`: this is the line key within the inquiry list.
- `returnURL`: used to determine how to return the configured product to the inquiry list. Depending on your e-commerce application, you may need to include a session ID in order that the user can continue their work in the e-commerce application.

When the Comergent eBusiness System receives this request, it redirects the request to the URL described in "Standard Punchin URL" on page 197 populating the parameters as necessary.

DTDs for the C3 Configurator

This section provides the document type definitions (DTDs) that specify the form of XML documents used by the *C3* Configurator. It covers:

- "DTD for Model Import" on page 199
- "DTD for Punchin and Punchout Messages" on page 209
- "DTD for Runtime XML Model File" on page 209

DTD for Model Import

This DTD describes the XML documents used to import models into the **C3** Configurator Visual Modeler. Models exported from the Visual Modeler are exported in this form too.

```
<!--
  -- Types:
  --   integer an integer value
  --   number a floating point number
  --   string a string value
  --   datestr a date encoded as a YYYY-MM-DD HH:mm:ss.hh string
  --
-->

<!--
  --
  -- Root node of a modeler import/export file
  --
-->
<!ELEMENT MODELER (#PCDATA | MODELGROUP)*>
<!ATTLIST MODELER version CDATA #IMPLIED>

<!--
  --
  -- LOCALE nodes store text specific to a models usage within one
  -- locale. A description,
  -- property value (for some property types, as determined by the
  -- modeler), error (warn|suggest too) message or tab name can all
  -- be localized
  --
-->
<!ELEMENT LOCALE (#PCDATA | DESCRIPTION | VALUE | MESSAGE | ERRORMES-
SAGE | NAME)*>
<!ATTLIST LOCALE xml:lang CDATA #IMPLIED>

<!--
  --
  -- LOCALES nodes store zero or more LOCALE nodes
  --
-->
<!ELEMENT LOCALES (#PCDATA | LOCALE)*>

<!--
  --
  -- One of the values within a list
  --
-->
```

```
<!ELEMENT LISTVAL (#PCDATA)>

<!--
--
-- The tabs within a model (used during configurator presentation
-- to break the user interface into tabbed sections) are stored as
-- a MODELTAB node, the sequence number determines the
-- relationship of a tab with its siblings. Each tab contains
-- ITEMS which are the names of top level option classes within
-- the model
--
-- SEQ:integer the sequence number of the tab
--
-->
<!ELEMENT MODELTAB (#PCDATA | LOCALES | ITEM)*>
<!ATTLIST MODELTAB SEQ CDATA #IMPLIED>

<!--
--
-- LIST's are stored as with this element type
--
-- DESCRIPTION:string the description of the list
-- NAME:string the name of the list
--
-->
<!ELEMENT LIST (#PCDATA | LISTVAL)*>
<!ATTLIST LIST DESCRIPTION CDATA #IMPLIED>
<!ATTLIST LIST NAME CDATA #IMPLIED>

<!--
--
-- Expansion actions are stored with this
-- node type
--
-- SEQ:integer the sequence number of this expansion action
-- item:string the path name of the expansion item, . and *.
--           have special meaning at the start of this value
-- max:number  the max value this expansion action applies to
-- min:number  the min value this expansion action applies to
-- qty:integer the amount of "item" that should be picked, this
-- value can be a number or a formula
--
-->
<!ELEMENT ACTIONITEM (#PCDATA)>
<!ATTLIST ACTIONITEM SEQ CDATA #IMPLIED>
<!ATTLIST ACTIONITEM item CDATA #IMPLIED>
<!ATTLIST ACTIONITEM max CDATA #IMPLIED>
<!ATTLIST ACTIONITEM min CDATA #IMPLIED>
<!ATTLIST ACTIONITEM qty CDATA #IMPLIED>
```



```
<!--
-- Rules are attached to items within a model by name, but defined
-- elsewhere in a model
--
-- BEGINDATE:datestrthe starting date on which this rule will
-- begin to fire
-- CHECKPOINT:integer0=no 1=yes, a checkpoint rule will stop all
-- rule firing if it fires
-- ENDDATE:datestrthe ending date after which this rule will no
-- longer fire
-- NAME:stringthe name of the rule attached at this point
-- SEQ:integerthe sequence number of this rule with regard to the
-- other itemrule's attached at this same spot
-->
<!ELEMENT ITEMRULE (#PCDATA)>
<!ATTLIST ITEMRULE BEGINDATE CDATA #IMPLIED>
<!ATTLIST ITEMRULE CHECKPOINT CDATA #IMPLIED>
<!ATTLIST ITEMRULE ENDDATE CDATA #IMPLIED>
<!ATTLIST ITEMRULE NAME CDATA #IMPLIED>
<!ATTLIST ITEMRULE SEQ CDATA #IMPLIED>

<!--
-- ACTIONS are subnodes of a rule. There are several types of
-- actions and a single rule can have any combinations of actions.
--
-- MSGTYPE:integer 0=error, 1=warn, 2=suggest, empty for
-- non-message actions
-- FORMULA:stringused only for expansion actions, this formula is
-- evaluated to determine which ACTIONITEM nodes should be picked
-- for the user
-- PROPNAME:stringused only for assignment rules specifies the
-- name of a property to set, can be a path name relative to the
-- location where the rule is attached or relative to the model
-- itself, or simply property name
-- PROPVALUE:stringused only for assignment rules to specify the
-- formula that should be used to calculate the value for the
-- property
-- SEQ:integerthe sequence number of this action
-- TYPE:integerthe type of action
--
-- TYPE='0' message rule, FORMULA PROPNAME and PROPVALUE should
-- be empty
-- TYPE='1' expansion rule FORMULA should be a formula PROPVALUE
-- and PROPNAME are empty
-- TYPE='2' assignment rule PROPNAME should be a property name,
-- PROPVALUE a formula to assign and FORMULA should be empty
-- string
--
```

```
-->
<!ELEMENT ACTION (#PCDATA | LOCALES | ACTIONITEM)*>
<!ATTLIST ACTION MSGTYPE CDATA #IMPLIED>
<!ATTLIST ACTION FORMULA CDATA #IMPLIED>
<!ATTLIST ACTION PROPNAME CDATA #IMPLIED>
<!ATTLIST ACTION PROPVALUE CDATA #IMPLIED>
<!ATTLIST ACTION SEQ CDATA #IMPLIED>
<!ATTLIST ACTION TYPE CDATA #IMPLIED>

<!--
--
-- A rule is a condition and actions. The condition is specified
-- as a boolean operation and the actions are previously
-- described.
--
-- DESCRIPTION:stringthe description of the rule
-- NAME:stringthe name of the rule
-- TRIGGER:integercurrently the visual modeler only supports rules
-- whose trigger is the constant '1'
--
-->
<!ELEMENT RULE (#PCDATA | BOOLOP | ACTION)*>
<!ATTLIST RULE DESCRIPTION CDATA #IMPLIED>
<!ATTLIST RULE NAME CDATA #IMPLIED>
<!ATTLIST RULE TRIGGER CDATA #IMPLIED>

<!--
--
-- The root node of a model
--
-- BEGINDATE:datestrthe starting date
-- DESCRIPTION:stringthe description of the item
-- ENDDATE:datestrthe ending date
-- ID:stringinternal id of an item, usually the key from the
-- system that created the item
-- NAME:stringname of the item
-- PATH:stringpath within the model group heirarchy to this model
-- SKU:stringsku associated with the model
-- SUBASSEMBLY_TYPE:string MODEL, OPTION_CLASS or OPTION_ITEM
-->
<!ELEMENT MODEL (#PCDATA | PROPERTIES | RULE | LOCALES | PROPVAL |
CLASS | CLASS_SUBASSEMBLY | ITEMRULE | TABLES | MODEL TABS | ITEM |
LIST)*>
<!ATTLIST MODEL BEGINDATE CDATA #IMPLIED>
<!ATTLIST MODEL DESCRIPTION CDATA #IMPLIED>
<!ATTLIST MODEL ENDDATE CDATA #IMPLIED>
<!ATTLIST MODEL ID CDATA #IMPLIED>
<!ATTLIST MODEL NAME CDATA #IMPLIED>
<!ATTLIST MODEL PATH CDATA #IMPLIED>
```

```
<!ATTLIST MODEL SKU CDATA #IMPLIED>
<!ATTLIST MODEL SUBASSEMBLY_TYPE CDATA #IMPLIED>

<!--
  -- Used for error, suggest, or warning message value
  -->
<!ELEMENT MESSAGE (#PCDATA)>

<!--
  --
  -- An item in a model
  --
  -- BEGINDATE:datestrthe starting date
  -- ENDDATE:datestrthe ending date
  -- ID:stringinternal id of an item, usually the key from the
  -- system that created the item
  -- SKU:stringsku associated with the model
  -- NAME:stringname of the item
  -- SEQ:integerthe sequence number of this item
-->
<!ELEMENT ITEM (#PCDATA | LOCALES | PROPVAL | ITEMRULE)*>
<!ATTLIST ITEM BEGINDATE CDATA #IMPLIED>
<!ATTLIST ITEM ENDDATE CDATA #IMPLIED>
<!ATTLIST ITEM ID CDATA #IMPLIED>
<!ATTLIST ITEM SKU CDATA #IMPLIED>
<!ATTLIST ITEM NAME CDATA #IMPLIED>
<!ATTLIST ITEM SEQ CDATA #IMPLIED>

<!--
  --
  -- A model group
  --
  -- DESCRIPTION:stringthe description of the item
  -- ID:stringinternal id of an item, usually the key from the
  -- system that created the item
  -- NAME:stringname of the item
  -- PATH:stringpath within the model group heirarchy to this model
  -- ROOTMG:stringtrue or false that the item was the root model
  -- group of the export set
-->
<!ELEMENT MODELGROUP (#PCDATA | PROPERTIES | MODEL | MODELGROUP |
RULE)*>
<!ATTLIST MODELGROUP DESCRIPTION CDATA #IMPLIED>
<!ATTLIST MODELGROUP ID CDATA #IMPLIED>
<!ATTLIST MODELGROUP NAME CDATA #IMPLIED>
<!ATTLIST MODELGROUP PATH CDATA #IMPLIED>
<!ATTLIST MODELGROUP ROOTMG CDATA #IMPLIED>
```

```
<!--
--
-- An option class in a model
--
-- BEGINDATE:datestrthe starting date
-- ENDDATE:datestrthe ending date
-- ID:stringinternal id of an item, usually the key from the
-- system that created the item
-- NAME:stringname of the item
-- RATIO:numberthe ratio of this items quantity to it's parent,
-- for example in a bicycle model, the tire option class may have
-- a ratio of 2 to it's parents (the bicycle)
-- 1
-- SKU:stringsku associated with the item
-->
<!ELEMENT CLASS (#PCDATA | LOCALES | PROPVAL | ITEM | ITEMRULE | CLASS
| ITEM_SUBASSEMBLY)*>
<!ATTLIST CLASS BEGINDATE CDATA #IMPLIED>
<!ATTLIST CLASS ENDDATE CDATA #IMPLIED>
<!ATTLIST CLASS ID CDATA #IMPLIED>
<!ATTLIST CLASS NAME CDATA #IMPLIED>
<!ATTLIST CLASS RATIO CDATA #IMPLIED>
<!ATTLIST CLASS SKU CDATA #IMPLIED>

<!--
--
-- A reference to a subassembly causes that subassembly
-- to appear (to the end user of configurator) as if that
-- subassembly were part of a larger model
--
-- BEGINDATE:datestr the starting date
-- ENDDATE:datestr the ending date
-- ID:string internal id of an item, usually the key from the
-- system that created the item
-- NAME:string name of the item
-- SKU:string sku associated with the item
-- SUBASSEMBLY_PATH:string the path to the subassembly from the
-- root model group down
-->
<!ELEMENT CLASS_SUBASSEMBLY (#PCDATA | LOCALES)*>
<!ATTLIST CLASS_SUBASSEMBLY BEGINDATE CDATA #IMPLIED>
<!ATTLIST CLASS_SUBASSEMBLY ENDDATE CDATA #IMPLIED>
<!ATTLIST CLASS_SUBASSEMBLY ID CDATA #IMPLIED>
<!ATTLIST CLASS_SUBASSEMBLY NAME CDATA #IMPLIED>
<!ATTLIST CLASS_SUBASSEMBLY SKU CDATA #IMPLIED>
<!ATTLIST CLASS_SUBASSEMBLY SUBASSEMBLY_PATH CDATA #IMPLIED>

<!--
--
```

```
-- The message for a constraint table.  Not necessarily an "error"
-- in the strict sense of the word, MESSAGE would be a better name
-- since the MSGTYPE attribute of the TABLE node determines
-- whether this is an an error, warning, or suggestion.
--
-->
<!ELEMENT ERRORMESSAGE (#PCDATA)>

<!--
--
-- A reference to an optoin item subbassembly
--
-- BEGINDATE:datestr    the starting date
-- ENDDATE:datestr      the ending date
-- ID:stringinternal id of an item, usually the key from the
-- system that created the item
-- NAME:stringname of the item
-- SKU:stringsku associated with the item
-- SUBASSEMBLY_PATH:string the path to the subassembly from the
-- root model group down
-->
<!ELEMENT ITEM_SUBASSEMBLY (#PCDATA | LOCALES)*>
<!ATTLIST ITEM_SUBASSEMBLY BEGINDATE CDATA #IMPLIED>
<!ATTLIST ITEM_SUBASSEMBLY ENDDATE CDATA #IMPLIED>
<!ATTLIST ITEM_SUBASSEMBLY ID CDATA #IMPLIED>
<!ATTLIST ITEM_SUBASSEMBLY NAME CDATA #IMPLIED>
<!ATTLIST ITEM_SUBASSEMBLY SKU CDATA #IMPLIED>
<!ATTLIST ITEM_SUBASSEMBLY SUBASSEMBLY_PATH CDATA #IMPLIED>

<!--
--
-- A boolean operation is part of the condition of a rule
--
-- BOOLOP:string    and|or
-- SEQ:integer      relative position of this booop amongst its
-- siblings
-- TYPE:integer     always 0
--
-->
<!ELEMENT BOOLOP (#PCDATA | FRAGMENT | BOOLOP)*>
<!ATTLIST BOOLOP BOOLOP CDATA #IMPLIED>
<!ATTLIST BOOLOP SEQ CDATA #IMPLIED>
<!ATTLIST BOOLOP TYPE CDATA #IMPLIED>

<!--
--
-- A relational fragment: func1(val1) op func2(val2)
-- FUNC1:stringname of a rule engine
-- function (sum, count, min, max, value)
-->
```

```
-- FUNC2:stringname of a rule engine
-- function (sum, count, min, max, value)
-- NULLACTION:string "fragment is true", "fragment is false",
-- "rule is true", or "rule is false"; the outcome if either side
-- of the rule is undefined
-- OP:string <, >, <=, >=, =, !=, "in", or "not in"
-- PROP1:stringname of prop1
-- PROP2:stringname of prop2
-- SEQ:integerrelative position of this booloop amongst its
-- siblings
-- TYPE:integeralways 1
-->
<!ELEMENT FRAGMENT (#PCDATA)>
<!ATTLIST FRAGMENT FUNC1 CDATA #IMPLIED>
<!ATTLIST FRAGMENT FUNC2 CDATA #IMPLIED>
<!ATTLIST FRAGMENT NULLACTION CDATA #IMPLIED>
<!ATTLIST FRAGMENT OP CDATA #IMPLIED>
<!ATTLIST FRAGMENT PROP1 CDATA #IMPLIED>
<!ATTLIST FRAGMENT PROP2 CDATA #IMPLIED>
<!ATTLIST FRAGMENT SEQ CDATA #IMPLIED>
<!ATTLIST FRAGMENT TYPE CDATA #IMPLIED>

<!--
--
-- Definition of a property, all properties must
-- be defined before they are used
--
-- DEFAULTVALUE:string the default value for a property
-- LOCALIZABLE:stringtrue or false whether the values of the
-- property can vary by locale, only appropriate for string
-- properties
-- NAME:stringname of the property
-- TYPE:stringnumber, string, or list
-->
<!ELEMENT PROPERTIES (#PCDATA)>
<!ATTLIST PROPERTIES DEFAULTVALUE CDATA #IMPLIED>
<!ATTLIST PROPERTIES LOCALIZABLE CDATA #IMPLIED>
<!ATTLIST PROPERTIES NAME CDATA #IMPLIED>
<!ATTLIST PROPERTIES TYPE CDATA #IMPLIED>

<!--
--
-- A value for a property
--
-- LOCALIZABLE:stringtrue or false
-- NAME:stringthe name of the property
-- VALUE:stringthe value for a property unless it is localizable
-- in which case it would be a child VALUE node under
-- LOCALES and LOCALE nodes
```

```
--
-->
<!ELEMENT PROPVAL (#PCDATA | LOCALES)*>
<!ATTLIST PROPVAL LOCALIZABLE CDATA #IMPLIED>
<!ATTLIST PROPVAL NAME CDATA #IMPLIED>
<!ATTLIST PROPVAL VALUE CDATA #IMPLIED>

<!--
  -- For properties whose values are localizable, these nodes
  -- contain those values, if the property is not localized, then
  -- the value attribute of the PROPVAL element is used
  -- instead
-->
<!ELEMENT VALUE (#PCDATA)>

<!--
  --
  -- Container for the definitions of all the tabs within a model,
  -- tabs are used to group items in the end user presentation of a
  -- model
  --
-->
<!ELEMENT MODEL TABS (#PCDATA | MODEL TAB)*>

<!--
  --
  -- The name of a tab
  --
-->
<!ELEMENT NAME (#PCDATA)>

<!--
  --
  -- Description nodes are used to hold the localized values for the
  -- description attribute from nearly any of the above other
  -- elements that have a description attribute
  --
-->
<!ELEMENT DESCRIPTION (#PCDATA)>

<!--
  --
  -- Holds the table rules (constraint tables) for a model
  --
-->
<!ELEMENT TABLES (#PCDATA | TABLE)*>
```

```
<!--
--
-- A constraint table
--
-- BEGINDATE:datestrthe starting date
-- DESCRIPTION:stringthe description of the item
-- ENDDATE:datestrthe ending date
-- MSGTYPE:number0=error, 1=warning, 2=suggest
-- NAME:stringname of the table
-->
<!ELEMENT TABLE (#PCDATA | LOCALES | ROW)*>
<!ATTLIST TABLE BEGINDATE CDATA #IMPLIED>
<!ATTLIST TABLE DESCRIPTION CDATA #IMPLIED>
<!ATTLIST TABLE ENDDATE CDATA #IMPLIED>
<!ATTLIST TABLE MSGTYPE CDATA #IMPLIED>
<!ATTLIST TABLE NAME CDATA #IMPLIED>

<!--
--
-- A row within the constraint table
--
-- COMPATIBLE:stringtrue or false whether the row expresses
-- items that work together 'true' or items
-- that do not work together 'false'
-- SEQ:integerrelative position of this item amongst its siblings
--
-->
<!ELEMENT ROW (#PCDATA | COLUMN)*>
<!ATTLIST ROW COMPATIBLE CDATA #IMPLIED>
<!ATTLIST ROW SEQ CDATA #IMPLIED>

<!--
--
-- A column within a row of a constraint table
--
-- ITEMPATH:stringthe path to an option class that contains the
-- items
-- NAME:stringthe name of the option class
-- SEQ:integerrelative position of this column amongst its
-- siblings
-->
<!ELEMENT COLUMN (#PCDATA | CELLDATA)*>
<!ATTLIST COLUMN ITEMPATH CDATA #IMPLIED>
<!ATTLIST COLUMN NAME CDATA #IMPLIED>
<!ATTLIST COLUMN SEQ CDATA #IMPLIED>

<!--
--
-- The data for a cell within a constraint table column
--
```



```

-- ITEMPATH:stringthe full path and item name of the constraint
-- item
-- NAME:stringthe name of the item
-->
<!ELEMENT CELLDATA (#PCDATA)>
<!ATTLIST CELLDATA ITEMPATH CDATA #IMPLIED>
<!ATTLIST CELLDATA NAME CDATA #IMPLIED>
>

```

DTD for Punchin and Punchout Messages

This DTD describes the XML documents used to specify models and selections as they are included in punchin posts to **C3** Configurator and punchout posts from **C3** Configurator.

```

<!ELEMENT ConfiguratorBOM (LineItem)>
<!ATTLIST ConfiguratorBOM ModelName CDATA #REQUIRED
                               Version CDATA #REQUIRED
>

<!ELEMENT LineItem (LineItem*)>
<!ATTLIST LineItem
        Description CDATA #REQUIRED
        ItemID CDATA #REQUIRED
        ItemKey CDATA #REQUIRED
        Name CDATA #REQUIRED
        Quantity CDATA #REQUIRED
        SKU CDATA #REQUIRED
        Visible (true | false) #REQUIRED
>

```

Each model passed in a message has a top-level ConfiguratorBOM element that defines as attributes the model name and version number of the model. It contains one LineItem element which in turn can contain many LineItem elements: one for each node of the configurable model. The Quantity attribute is used to record whether the line item is picked and it takes integer values.

DTD for Runtime XML Model File

This DTD describes the runtime version of XML model files that the **C3** Configurator uses in order to render the end-user experience. When models are created by the **C3** Configurator Visual Modeler or when they are imported from as XML files, the models are translated into this form and saved to the file system as XML files whose name encodes the model name.

```

<!ELEMENT model (property*, list*, propval*, rule*, class*)>
<!ATTLIST modelid CDATA #REQUIRED
        name CDATA #REQUIRED
        description CDATA #IMPLIED

```

```

                                partid          CDATA          #IMPLIED
>
<!ELEMENT property EMPTY>
<!ATTLIST propertyid          ID          #REQUIRED
                                name          CDATA          #REQUIRED
                                type          (string | list | number)#REQUIRED
                                defaultvalue   CDATA          #IMPLIED
>

<!ELEMENT list                (#PCDATA)> <!-- put the list values as
parsed character data -->
<!ATTLIST list                name          CDATA          #REQUIRED>

<!ELEMENT propval             EMPTY>
<!ATTLIST propval             id            IDREF          #REQUIRED
                                value        CDATA          #REQUIRED
>

<!ELEMENT rule (boolop, action)>
<!ATTLIST rule name           CDATA          #REQUIRED
                                firingphase preexpansion | expansion | postexpansion |
                                inference)      #REQUIRED
                                trigger (true|false)      #REQUIRED
>

<!ELEMENT boolop              (boolop| fragment)*>
<!ATTLIST boolop              boolop (or | and | ornot | andnot)
                                #REQUIRED>

<!ELEMENT fragment            EMPTY>
<!ATTLIST fragment            func1          CDATA          #REQUIRED
                                prop1          CDATA          #REQUIRED
                                op             CDATA          #REQUIRED
                                func2          CDATA          #REQUIRED
                                prop2          CDATA          #REQUIRED
                                nullaction (fragfalse | fragtrue |
                                condtrue | condfalse) #REQUIRED
>

<!ELEMENT action (expansionaction?, (erroraction | warningaction |
suggestionaction | assignmentaction | addfilteraction |
performfilteraction | stopaction)*)>

<!ELEMENT expansionaction      (expansion)+>
<!ATTLIST expansionaction      formula        CDATA          #REQUIRED>

<!ELEMENT expansion            EMPTY>
<!ATTLIST expansion            min            CDATA          #REQUIRED
                                max            CDATA          #REQUIRED

```

```

                                qty          CDATA    #REQUIRED
                                item         CDATA    #REQUIRED
>

<!ELEMENT addfilteraction    EMPTY>
<!ATTLIST addfilteraction    filtername     CDATA    #REQUIRED>
<!ATTLIST addfilteraction    property      CDATA    #REQUIRED>

<!ELEMENT performfilteraction EMPTY>
<!ATTLIST performfilteraction filtername     CDATA#REQUIRED>
<!ATTLIST performfilteraction domain        CDATA#REQUIRED>

<!ELEMENT erroraction        EMPTY>
<!ATTLIST erroraction        message        CDATA    #REQUIRED>

<!ELEMENT warningaction      EMPTY>
<!ATTLIST warningaction      message        CDATA    #REQUIRED>

<!ELEMENT suggestionaction   EMPTY>
<!ATTLIST suggestionaction   message        CDATA    #REQUIRED>

<!ELEMENT assignmentaction   EMPTY>
<!ATTLIST assignmentaction   propname       CDATA    #REQUIRED
                                formula       CDATA    #REQUIRED
>
<!ELEMENT stopaction EMPTY>

<!ELEMENT class (propval*,rule*,(item | class | subassembly)*)>
<!ATTLIST class
                                name          CDATA    #REQUIRED
                                id            CDATA    #REQUIRED
                                description    CDATA    #IMPLIED
                                partid        CDATA    #IMPLIED
                                begindate     CDATA    #IMPLIED
                                enddate       CDATA    #IMPLIED
                                ratio         CDATA    #IMPLIED
>

<!ELEMENT item (propval*,rule*)>
<!ATTLIST item
                                name          CDATA    #REQUIRED
                                id            CDATA    #REQUIRED
                                description    CDATA    #IMPLIED
                                partid        CDATA    #IMPLIED
                                begindate     CDATA    #IMPLIED
                                enddate       CDATA    #IMPLIED
>

<!ELEMENT subassembly EMPTY>
<!ATTLIST subassembly
                                name          CDATA#REQUIRED
                                description    CDATA#IMPLIED
                                type (model|class|item) #REQUIRED

```

partid	CDATA#IMPLIED
include	CDATA#REQUIRED

>

Sample XML for C3 Configurator

This example below shows the resulting XML message that can be used to punch back from the **C3** Configurator into an e-commerce system after configuration. The punchback message is transferred to the receiving system as XML over HTTP.

```
<ConfiguratorBOM ModelName="Symbol_0020Models/Mobile_0020Computing/
VRC694X" Version="1.0">
  <LineItem Description="VRC694X" ItemID="0" ItemKey="206610"
Name="VRC694X" Quantity="1" SKU="VRC694X" Visible="true">
    <LineItem Description="Radio Frequency" ItemID="1"
ItemKey="206611" Name="RF" Quantity="1" SKU="" Visible="false">
      <LineItem Description="Spectrum 24 (1Mbps)" ItemID="2"
ItemKey="206612" Name="Spec24 (1Mbps)" Quantity="0" SKU="" Visi-
ble="false"/>
      <LineItem Description="Spectrum 24 (1Mbps)" ItemID="3"
ItemKey="206613" Name="Spec24 (1Mbps)" Quantity="1" SKU="" Visi-
ble="true"/>
    </LineItem>
    <LineItem Description="Antenna" ItemID="4" ItemKey="206614"
Name="Antenna" Quantity="1" SKU="" Visible="false">
      <LineItem Description="One Antenna" ItemID="5" ItemKey="206615"
Name="OneAnt" Quantity="0" SKU="" Visible="false"/>
      <LineItem Description="Two Antenna" ItemID="6" ItemKey="206616"
Name="TwoAnt" Quantity="1" SKU="" Visible="true"/>
    </LineItem>
    <LineItem Description="Heater" ItemID="7" ItemKey="206617"
Name="Heater" Quantity="1" SKU="" Visible="false">
      <LineItem Description="Heater" ItemID="8" ItemKey="206618"
Name="Heater" Quantity="0" SKU="" Visible="false"/>
      <LineItem Description="No Heater" ItemID="9" ItemKey="206619"
Name="None" Quantity="1" SKU="" Visible="true"/>
    </LineItem>
    <LineItem Description="Display" ItemID="10" ItemKey="206620"
Name="Display" Quantity="1" SKU="" Visible="false">
      <LineItem Description="8 Line x 40 Character" ItemID="11"
ItemKey="206621" Name="8Ln40Ch" Quantity="1" SKU="" Visible="true"/>
    </LineItem>
    <LineItem Description="RAM Memory" ItemID="12" ItemKey="206622"
Name="RAM" Quantity="1" SKU="" Visible="false">
      <LineItem Description="640KB" ItemID="13" ItemKey="206623"
Name="640KB" Quantity="1" SKU="" Visible="true"/>
    </LineItem>
    <LineItem Description="Keyboard" ItemID="14" ItemKey="206624"
```

```
Name="Keybrd" Quantity="1" SKU="" Visible="false">
  <LineItem Description="54 Key (Alphanumeric)" ItemID="15"
ItemKey="206625" Name="54Key" Quantity="1" SKU="" Visible="true"/>
</LineItem>
  <LineItem Description="Flash Memory Expansion" ItemID="16"
ItemKey="206626" Name="FlashMem" Quantity="1" SKU="" Visible="false">
  <LineItem Description="1.2 MB Flash" ItemID="17" ItemKey="206627"
Name="1_2MB" Quantity="1" SKU="" Visible="true"/>
</LineItem>
  <LineItem Description="Country Code" ItemID="18" ItemKey="206628"
Name="CountryCode" Quantity="1" SKU="" Visible="true">
  <LineItem Description="Europe (E1) (Australia, Austria, Croatia,
Denmark, Finland, Greece, Iceland, Ireland, Liechtenstein, Norway,
Switzerland and UK)" ItemID="19" ItemKey="206629" Name="E1" Quan-
tity="0" SKU="" Visible="false"/>
  <LineItem Description="European Union" ItemID="20"
ItemKey="206630" Name="EU" Quantity="0" SKU="" Visible="false"/>
  <LineItem Description="United States and Canada" ItemID="21"
ItemKey="206631" Name="US" Quantity="1" SKU="" Visible="true"/>
</LineItem>
  <LineItem Description="Standard Configurations" ItemID="22"
ItemKey="206632" Name="Standard Configurations" Quantity="1" SKU=""
Visible="true">
  <LineItem Description="VRC6940-00V651US" ItemID="23"
ItemKey="206633" Name="VRC6940-00V651US" Quantity="0" SKU="VRC6940-
00V651US" Visible="false"/>
  <LineItem Description="VRC6940-0HV651E1" ItemID="24"
ItemKey="206634" Name="VRC6940-0HV651E1" Quantity="0" SKU="VRC6940-
0HV651E1" Visible="false"/>
  <LineItem Description="VRC6940-0HV651US" ItemID="25"
ItemKey="206635" Name="VRC6940-0HV651US" Quantity="0" SKU="VRC6940-
0HV651US" Visible="false"/>
  <LineItem Description="VRC6940-20V651US" ItemID="26"
ItemKey="206636" Name="VRC6940-20V651US" Quantity="1" SKU="VRC6940-
20V651US" Visible="true"/>
  <LineItem Description="VRC6940-2HV651E1" ItemID="27"
ItemKey="206637" Name="VRC6940-2HV651E1" Quantity="0" SKU="VRC6940-
2HV651E1" Visible="false"/>
  <LineItem Description="VRC6940-2HV651US" ItemID="28"
ItemKey="206638" Name="VRC6940-2HV651US" Quantity="0" SKU="VRC6940-
2HV651US" Visible="false"/>
  <LineItem Description="VRC6946-20V651EU" ItemID="29"
ItemKey="206639" Name="VRC6946-20V651EU" Quantity="0" SKU="VRC6946-
20V651EU" Visible="false"/>
  <LineItem Description="VRC6946-20V651US" ItemID="30"
ItemKey="206640" Name="VRC6946-20V651US" Quantity="0" SKU="VRC6946-
20V651US" Visible="false"/>
  <LineItem Description="VRC6946-2HV651US" ItemID="31"
ItemKey="206641" Name="VRC6946-2HV651US" Quantity="0" SKU="VRC6946-
```

```
2HV651US" Visible="false"/>
</LineItem>
<LineItem Description="Required Accessories" ItemID="32"
ItemKey="206642" Name="RequiredAccessories" Quantity="1" SKU="" Visi-
ble="false"/>
<LineItem Description="Would you like to view compatible accesso-
ries?" ItemID="33" ItemKey="206643" Name="Q:Accessories" Quan-
tity="1" SKU="" Visible="false">
<LineItem Description="No" ItemID="34" ItemKey="206644" Name="No"
Quantity="1" SKU="" Visible="true"/>
<LineItem Description="Yes" ItemID="35" ItemKey="206645"
Name="Yes" Quantity="0" SKU="" Visible="false"/>
</LineItem>
<LineItem Description="Antenna (Spectrum 24)" ItemID="36"
ItemKey="206646" Name="S24Antenna" Quantity="1" SKU="" Visi-
ble="false">
<LineItem Description="ML-2499-APA1-00 - (S24) 6 Inch Rubber
Duck antenna" ItemID="37" ItemKey="206647" Name="6inch" Quantity="0"
SKU="ML-2499-APA1-00" Visible="false"/>
<LineItem Description="ML-2499-PTA1-01 - (S24) Patch Antenna"
ItemID="38" ItemKey="206648" Name="Patch" Quantity="0" SKU="ML-2499-
PTA1-01" Visible="false"/>
<LineItem Description="ML-2499-VRA1-00 - (S24) 3 1/2 Inch Rugged
Rubber Duck Antenna" ItemID="39" ItemKey="206649" Name="3HalfInch"
Quantity="0" SKU="ML-2499-VRA1-00" Visible="false"/>
</LineItem>
<LineItem Description="Power Cables" ItemID="40" ItemKey="206650"
Name="PowerCables" Quantity="1" SKU="" Visible="false">
<LineItem Description="25-39385-01 - AC Power supply output
cable to VRC69XX" ItemID="41" ItemKey="206651" Name="AC Ps" Quan-
tity="0" SKU="25-39385-01" Visible="false"/>
<LineItem Description="50-14001-006 - AC Power Supply (for fixed
mount)" ItemID="42" ItemKey="206652" Name="AC Ps fixed" Quantity="0"
SKU="50-14001-006" Visible="false"/>
<LineItem Description="23844-00-00 - AC Line Cord (for fixed
mount)" ItemID="43" ItemKey="206653" Name="AC Lc fixed" Quantity="0"
SKU="23844-00-00" Visible="false"/>
</LineItem>
<LineItem Description="Documentation" ItemID="44"
ItemKey="206654" Name="Doc" Quantity="1" SKU="" Visible="false">
<LineItem Description="72-37641-01 - Product Reference Guide"
ItemID="45" ItemKey="206655" Name="PRG" Quantity="0" SKU="72-37641-
01" Visible="false"/>
</LineItem>
<LineItem Description="Miscellaneous" ItemID="46"
ItemKey="206656" Name="Misc" Quantity="1" SKU="" Visible="false">
<LineItem Description="C163H07 - Additional Bracket Assembly
(One bracket assembly is already included per device)" ItemID="47"
ItemKey="206657" Name="BASsem" Quantity="0" SKU="C163H07" Visi-
```

```
ble="false"/>
  <LineItem Description="C163016 - Spare Isolation Mounts
(Included in Bracket Assembly)" ItemID="48" ItemKey="206658" Name="Is
Mounts" Quantity="0" SKU="C163016" Visible="false"/>
  <LineItem Description="C163019 - Spare Knob Kit (Included in
Bracket Assembly)" ItemID="49" ItemKey="206659" Name="Knob K" Quan-
tity="0" SKU="C163019" Visible="false"/>
</LineItem>
  <LineItem Description="Cables" ItemID="50" ItemKey="206660"
Name="Cables" Quantity="1" SKU="" Visible="false">
  <LineItem Description="25-38407-01 - LS/KS -3XXX Scanner cable"
ItemID="51" ItemKey="206661" Name="LS/KS Scnr C" Quantity="0" SKU="25-
38407-01" Visible="false"/>
  <LineItem Description="25-41308-01 - P300std scanner cable"
ItemID="52" ItemKey="206662" Name="P300std Scnr C" Quantity="0"
SKU="25-41308-01" Visible="false"/>
  <LineItem Description="25-38408-01 - Spare DC Power Cable 10
(VRC6940 to Forklift) (One DC Power Cable is already included per
device)" ItemID="53" ItemKey="206663" Name="DC Pwr C" Quantity="0"
SKU="25-38408-01" Visible="false"/>
  <LineItem Description="25-38411-01 - RS232 Cable" ItemID="54"
ItemKey="206664" Name="RS232 C" Quantity="0" SKU="25-38411-01" Visi-
ble="false"/>
</LineItem>
  <LineItem Description="EPOG Model Group" ItemID="55"
ItemKey="206665" Name="EPOG Model Group" Quantity="1" SKU="" Visi-
ble="true">
  <LineItem Description="Terminals" ItemID="56" ItemKey="206666"
Name="Terminals" Quantity="0" SKU="" Visible="false"/>
</LineItem>
</LineItem>
</ConfiguratorBOM>
```

Model Export and Import XML Example

The XML format described below is used to import models into the modeling environment of the **C3** Configurator called Visual Modeler.

```
<MODELER version="2">
  <MODEL BEGINDATE="2001-12-12 14:16:52.0" DESCRIPTION="VRC694X"
ENDDATE="2101-11-18 14:16:52.0" ID="I_200020" NAME="VRC694X"
SUBASSEMBLY_TYPE="MODEL">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC694X</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: ICON GRAPHIC" VALUE=".."/>
```

```
images/Symbol/models/69beauty.jpg"/>
  <PROPVAL LOCALIZABLE="false" NAME="MoreInfo" VALUE="http://
www.symbol.com/products/mobile_computers/
mobile_stationaryvmt_vrc_6900.html"/>
  <CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206802" NAME="RF" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>Radio Frequency</DESCRIPTION>
      </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
    <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206803" NAME="Spec24 (11Mbps)" SKU="">
      <LOCALES>
        <LOCALE xml:lang="en-US">
          <DESCRIPTION>Spectrum 24 (11Mbps)</DESCRIPTION>
        </LOCALE>
      </LOCALES>
    </ITEM>
    <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206804" NAME="Spec24 (1Mbps)" SKU="">
      <LOCALES>
        <LOCALE xml:lang="en-US">
          <DESCRIPTION>Spectrum 24 (1Mbps)</DESCRIPTION>
        </LOCALE>
      </LOCALES>
    </ITEM>
  </CLASS>
  <CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206805" NAME="Antenna" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>Antenna</DESCRIPTION>
      </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
    <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206806" NAME="OneAnt" SKU="">
      <LOCALES>
        <LOCALE xml:lang="en-US">
          <DESCRIPTION>One Antenna</DESCRIPTION>
        </LOCALE>
      </LOCALES>
```



```
</LOCALES>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206807" NAME="TwoAnt" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Two Antenna</DESCRIPTION>
    </LOCALE>
  </LOCALES>
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206808" NAME="Heater" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Heater</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206809" NAME="Heater" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>Heater</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206810" NAME="None" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>No Heater</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206811" NAME="Display" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Display</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: REQUIRED" VALUE="true"/>
```

```
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206812" NAME="8Ln40Ch" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>8 Line x 40 Character</DESCRIPTION>
    </LOCALE>
  </LOCALES>
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206813" NAME="RAM" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>RAM Memory</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: REQUIRED" VALUE="true"/>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206814" NAME="640KB" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>640KB</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206815" NAME="Keybrd" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Keyboard</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: REQUIRED" VALUE="true"/>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206816" NAME="54Key" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>54 Key (Alphanumeric)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
```

```
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206817" NAME="FlashMem" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Flash Memory Expansion</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: REQUIRED" VALUE="true"/>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206818" NAME="1_2MB" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>1.2 MB Flash</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206819" NAME="CountryCode" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Country Code</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206820" NAME="E1" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>Europe (E1) (Australia, Austria, Croatia, Den-
mark, Finland, Greece, Iceland, Ireland, Liechtenstein, Norway, Swit-
zerland and UK)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206821" NAME="EU" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>European Union</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
```

```
14:16:52.0" ID="I_206822" NAME="US" SKU=""><LOCALES>
  <LOCALE xml:lang="en-US">
    <DESCRIPTION>United States and Canada</DESCRIPTION>
  </LOCALE>
</LOCALES>
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206823" NAME="Standard Configurations" SKU=""><LOCALES>
  <LOCALE xml:lang="en-US">
    <DESCRIPTION>Standard Configurations</DESCRIPTION>
  </LOCALE>
</LOCALES>
<PROPVAL LOCALIZABLE="false" NAME="SYM_ITEM_TYPE" VALUE="STDCON-
FIG"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLEPOPOP"/>
<PROPVAL LOCALIZABLE="true" NAME="UI: POST PICK GUIDING TEXT">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <VALUE>Standard Configuration</VALUE>
    </LOCALE>
  </LOCALES>
</PROPVAL>
<PROPVAL LOCALIZABLE="false" NAME="MoreInfo" VALUE="http://
www.symbol.com/products/mobile_computers/
mobile_stationaryvmt_vrc_6900.html"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: ICON GRAPHIC" VALUE="../
images/Symbol/models/69beauty.jpg"/>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206824" NAME="VRC6940-00V651US" SKU="VRC6940-
00V651US">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-00V651US</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206825" NAME="VRC6940-0HV651E1" SKU="VRC6940-
0HV651E1">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-0HV651E1</DESCRIPTION>
    </LOCALE>
```

```
</LOCALES>
<PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206826" NAME="VRC6940-0HV651US" SKU="VRC6940-
0HV651US">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-0HV651US</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206827" NAME="VRC6940-20V651US" SKU="VRC6940-
20V651US">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-20V651US</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206828" NAME="VRC6940-2HV651E1" SKU="VRC6940-
2HV651E1">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-2HV651E1</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206829" NAME="VRC6940-2HV651US" SKU="VRC6940-
2HV651US">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>VRC6940-2HV651US</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
```

```
14:16:52.0" ID="I_206830" NAME="VRC6946-20V651EU" SKU="VRC6946-
20V651EU">
    <LOCALES>
        <LOCALE xml:lang="en-US">
            <DESCRIPTION>VRC6946-20V651EU</DESCRIPTION>
        </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206831" NAME="VRC6946-20V651US" SKU="VRC6946-
20V651US">
    <LOCALES>
        <LOCALE xml:lang="en-US">
            <DESCRIPTION>VRC6946-20V651US</DESCRIPTION>
        </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
<ITEM BEGINDATE="2001-12-12 14:16:52.0" ENDDATE="2101-11-18
14:16:52.0" ID="I_206832" NAME="VRC6946-2HV651US" SKU="VRC6946-
2HV651US">
    <LOCALES>
        <LOCALE xml:lang="en-US">
            <DESCRIPTION>VRC6946-2HV651US</DESCRIPTION>
        </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="StdConfigSelected"
VALUE="TRUE"/>
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:39:09.0" ENDDATE="2101-12-18
12:39:09.0" ID="I_206833" NAME="RequiredAccessories" SKU="">
    <LOCALES>
        <LOCALE xml:lang="en-US">
            <DESCRIPTION>Required Accessories</DESCRIPTION>
        </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="true" NAME="UI: CONSTANT GUIDING TEXT">
        <LOCALES>
            <LOCALE xml:lang="en-US">
                <VALUE>The above Standard Configuration does not ship with
the items listed below. Selecting each of these items will ensure a
complete hardware solution.</VALUE>
            </LOCALE>
        </LOCALES>
    </PROPVAL>
```

```
<PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
BOX"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:40:36.0" ENDDATE="2101-12-18
12:40:36.0" ID="I_206834" NAME="Q:Accessories" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Would you like to view compatible accessories?</
DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: PRICING STYLE"
VALUE="NONE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: REQUIRED" VALUE="true"/>
  <ITEM BEGINDATE="2001-12-18 12:41:15.0" ENDDATE="2101-12-18
12:41:15.0" ID="I_206835" NAME="No" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>No</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-18 12:41:20.0" ENDDATE="2101-12-18
12:41:20.0" ID="I_206836" NAME="Yes" SKU="">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>Yes</DESCRIPTION>
      </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="Q:Accessories" VALUE="Yes"/
>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:02:08.0" ENDDATE="2101-12-18
12:02:08.0" ID="I_206837" NAME="S24Antenna" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Antenna (Spectrum 24)</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
```

```
BOX"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
    <ITEMRULE BEGINDATE="2001-12-18 12:42:56.0" CHECKPOINT="0" END-
DATE="2101-12-18 12:42:56.0" NAME="ExpandAccessories" SEQ="1"/>
    <ITEM BEGINDATE="2001-12-18 12:48:33.0" ENDDATE="2101-12-18
12:48:33.0" ID="I_206838" NAME="6inch" SKU="ML-2499-APA1-00">
        <LOCALES>
            <LOCALE xml:lang="en-US">
                <DESCRIPTION>ML-2499-APA1-00 - (S24) 6 Inch Rubber Duck
antenna</DESCRIPTION>
            </LOCALE>
        </LOCALES>
    </ITEM>
    <ITEM BEGINDATE="2001-12-18 12:48:44.0" ENDDATE="2101-12-18
12:48:44.0" ID="I_206839" NAME="Patch" SKU="ML-2499-PTA1-01">
        <LOCALES>
            <LOCALE xml:lang="en-US">
                <DESCRIPTION>ML-2499-PTA1-01 - (S24) Patch Antenna</
DESCRIPTION>
            </LOCALE>
        </LOCALES>
    </ITEM>
    <ITEM BEGINDATE="2001-12-18 12:48:51.0" ENDDATE="2101-12-18
12:48:51.0" ID="I_206840" NAME="3HalfInch" SKU="ML-2499-VRA1-00">
        <LOCALES>
            <LOCALE xml:lang="en-US">
                <DESCRIPTION>ML-2499-VRA1-00 - (S24) 3 1/2 Inch Rugged
Rubber Duck Antenna</DESCRIPTION>
            </LOCALE>
        </LOCALES>
    </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:02:23.0" ENDDATE="2101-12-18
12:02:23.0" ID="I_206841" NAME="PowerCables" SKU="">
    <LOCALES>
        <LOCALE xml:lang="en-US">
            <DESCRIPTION>Power Cables</DESCRIPTION>
        </LOCALE>
    </LOCALES>
    <PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
BOX"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
    <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
    <ITEMRULE BEGINDATE="2001-12-18 12:46:40.0" CHECKPOINT="0" END-
```



```
DATE="2101-12-18 12:46:40.0" NAME="ExpandAccessories" SEQ="1"/>
  <ITEM BEGINDATE="2001-12-18 12:49:09.0" ENDDATE="2101-12-18
12:49:09.0" ID="I_206842" NAME="AC Ps" SKU="25-39385-01">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>25-39385-01 - AC Power supply output cable
to VRC69XX</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-18 12:49:19.0" ENDDATE="2101-12-18
12:49:19.0" ID="I_206843" NAME="AC Ps fixed" SKU="50-14001-006">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>50-14001-006 - AC Power Supply (for fixed
mount)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-18 12:49:26.0" ENDDATE="2101-12-18
12:49:26.0" ID="I_206844" NAME="AC Lc fixed" SKU="23844-00-00">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>23844-00-00 - AC Line Cord (for fixed
mount)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:02:30.0" ENDDATE="2101-12-18
12:02:30.0" ID="I_206845" NAME="Doc" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Documentation</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
BOX"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <ITEMRULE BEGINDATE="2001-12-18 12:47:07.0" CHECKPOINT="0" END-
DATE="2101-12-18 12:47:07.0" NAME="ExpandAccessories" SEQ="1"/>
  <ITEM BEGINDATE="2001-12-18 12:49:42.0" ENDDATE="2101-12-18
12:49:42.0" ID="I_206846" NAME="PRG" SKU="72-37641-01">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>72-37641-01 - Product Reference Guide</
```

```
DESCRIPTION>
  </LOCALE>
</LOCALES>
</ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:02:38.0" ENDDATE="2101-12-18
12:02:38.0" ID="I_206847" NAME="Misc" SKU="">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>Miscellaneous</DESCRIPTION>
    </LOCALE>
  </LOCALES>
  <PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
BOX"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
  <PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
  <ITEMRULE BEGINDATE="2001-12-18 12:47:30.0" CHECKPOINT="0" END-
DATE="2101-12-18 12:47:30.0" NAME="ExpandAccessories" SEQ="1"/>
  <ITEM BEGINDATE="2001-12-18 12:49:59.0" ENDDATE="2101-12-18
12:49:59.0" ID="I_206848" NAME="BAssem" SKU="C163H07">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>C163H07 - Additional Bracket Assembly (One
bracket assembly is already included per device)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-18 12:50:06.0" ENDDATE="2101-12-18
12:50:06.0" ID="I_206849" NAME="Is Mounts" SKU="C163016">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>C163016 - Spare Isolation Mounts (Included
in Bracket Assembly)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
  <ITEM BEGINDATE="2001-12-18 12:50:12.0" ENDDATE="2101-12-18
12:50:12.0" ID="I_206850" NAME="Knob K" SKU="C163019">
    <LOCALES>
      <LOCALE xml:lang="en-US">
        <DESCRIPTION>C163019 - Spare Knob Kit (Included in
Bracket Assembly)</DESCRIPTION>
      </LOCALE>
    </LOCALES>
  </ITEM>
</CLASS>
<CLASS BEGINDATE="2001-12-18 12:02:45.0" ENDDATE="2101-12-18
```

```
12:02:45.0" ID="I_206851" NAME="Cables" SKU=""><LOCALES>
  <LOCALE xml:lang="en-US">
    <DESCRIPTION>Cables</DESCRIPTION>
  </LOCALE>
</LOCALES>
<PROPVAL LOCALIZABLE="false" NAME="UI: CONTROL" VALUE="CHECK-
BOX"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
<PROPVAL LOCALIZABLE="false" NAME="UI: IGNORE IN QUOTE"
VALUE="yes"/>
<ITEMRULE BEGINDATE="2001-12-18 12:47:50.0" CHECKPOINT="0" END-
DATE="2101-12-18 12:47:50.0" NAME="ExpandAccessories" SEQ="1"/>
<ITEM BEGINDATE="2001-12-18 12:50:31.0" ENDDATE="2101-12-18
12:50:31.0" ID="I_206852" NAME="LS/KS Scnr C" SKU="25-38407-01">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>25-38407-01 - LS/KS -3XXX Scanner cable</
DESCRIPTION>
    </LOCALE>
  </LOCALES>
</ITEM>
<ITEM BEGINDATE="2001-12-18 12:50:37.0" ENDDATE="2101-12-18
12:50:37.0" ID="I_206853" NAME="P300std Scnr C" SKU="25-41308-01">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>25-41308-01 - P300std scanner cable</
DESCRIPTION>
    </LOCALE>
  </LOCALES>
</ITEM>
<ITEM BEGINDATE="2001-12-18 12:50:43.0" ENDDATE="2101-12-18
12:50:43.0" ID="I_206854" NAME="DC Pwr C" SKU="25-38408-01">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>25-38408-01 - Spare DC Power Cable 10
(VRC6940 to Forklift) (One DC Power Cable is already included per
device)</DESCRIPTION>
    </LOCALE>
  </LOCALES>
</ITEM>
<ITEM BEGINDATE="2001-12-18 12:50:49.0" ENDDATE="2101-12-18
12:50:49.0" ID="I_206855" NAME="RS232 C" SKU="25-38411-01">
  <LOCALES>
    <LOCALE xml:lang="en-US">
      <DESCRIPTION>25-38411-01 - RS232 Cable</DESCRIPTION>
    </LOCALE>
  </LOCALES>
```

```
        </ITEM>
    </CLASS>
    <CLASS BEGINDATE="2002-02-12 12:40:05.0" ENDDATE="2102-02-12
12:40:05.0" ID="I_206856" NAME="EPOG Model Group" SKU="">
        <LOCALES>
            <LOCALE xml:lang="en-US">
                <DESCRIPTION>EPOG Model Group</DESCRIPTION>
            </LOCALE>
        </LOCALES>
        <PROPVAL LOCALIZABLE="false" NAME="UI: OPTION CLASS VIEW"
VALUE="INVISIBLE"/>
        <ITEM BEGINDATE="2002-02-12 12:40:46.0" ENDDATE="2102-02-12
12:40:46.0" ID="I_206857" NAME="Terminals" SKU="">
            <LOCALES>
                <LOCALE xml:lang="en-US">
                    <DESCRIPTION>Terminals</DESCRIPTION>
                </LOCALE>
            </LOCALES>
        </ITEM>
    </CLASS>
</MODEL>
</MODELER>
```

This release of the Comergent eBusiness System uses Release 8 Service Pack 1 of Actuate software components. See "Migration From Previous Versions of C3 Analyzer" on page 253 for information about upgrading earlier installations of **C3** Analyzer.

If you are running the Comergent eBusiness System Knowledgebase on SQL Server, then note that Release 6.3 and later releases changed the way in which the Actuate Server connects to the Knowledgebase: from using the DBLIB client to using an ODBC connection. This improves support for internationalization. If you want your implementation to use the DBLIB client, then contact your Comergent Technologies representative to obtain the appropriate resources.

This release of **C3** Analyzer also supports the deployment of more than one implementation of **C3** Analyzer using one instance of the Actuate Server. This means that one installation of the Actuate Server can be used to provide reports for several different instances of the Comergent eBusiness System each of which use their own Knowledgebase.

Actuate Software

Our partner, Actuate, provides the software that supports the reporting capabilities of **C3** Analyzer. It is supplied on the Comergent CD-ROMs. Table 14, "Actuate

Products", on page 230 provides the necessary information regarding its components.

TABLE 14. Actuate Products

Actuate Product	Platform	Relation to other machines	Location on CD-ROMs
Active Portal	Windows 2000	Actuate Server machine	Actuate_8_iServer_Windows: active-portal-jsp-8sp1.zip
	Solaris		Actuate_8_iServer_Solaris: active-portal-solaris-8sp1.tar
iServer and Management Console	Windows 2000	Actuate Server machine	Actuate_8_iServer_Windows: iserver-windows-8sp1.zip
	Solaris		Actuate_8_iServer_Solaris: iserver-solaris-8sp1.tar
e.Report Designer Professional	Windows 2000	LAN connectivity to Actuate Server machine	Actuate_8_Designer_Products

Our implementation supports the Actuate Server components (Active Portal, iServer, and Management Console) installed on the same machine, and these implementation instructions assume this configuration. If you choose a different configuration, then please consult your Comergent Technologies representative.

Secure Actuate Server

If the Active Portal Component is accessible by the outside world, then you can set it up so that Comergent eBusiness System reports are only accessible from the **C3** Analyzer pages. See "Setting Up a Secure Actuate Server" on page 247 for more information. Enterprise users must enable cookies on their browsers.

Note: We suggest that you perform an insecure installation of **C3** Analyzer first, and test the basic operation of the module. Then follow the instructions to secure the Actuate Server.

When you use one installation of the Actuate Server to support multiple installations of the Comergent eBusiness System, then you should always use a secure Actuate Server setup.

Installation

To implement the **C3** Analyzer module, you need to identify the following:

- The location of the **C3** Analyzer installation JAR file. This file is provided as part of the general installation JAR file as described in CHAPTER 5, "Installing the Comergent eBusiness System". When you unjar the installation JAR file, a **cmgt_home/analyzer/** sub-directory is created. This directory contains the **analyzer-7.0-def-RCx.jar** file which contains all the files necessary for installing **C3** Analyzer. You must unjar this file into a location on any convenient machine for the steps that follow: we call this location **cmgt_analyzer_home**.
- The license key file to install the Actuate Server software. Contact Comergent Technologies Support for this file.
- Actuate Server machine: the machine on which the server components run:
 - Active Portal: serves the report pages to users of the Comergent eBusiness System
 - iServer: hosts the reports and manages the connection to the Knowledgebase
 - Management Console: provides the management user interface to the iServer: this is installed as part of the installation of the iServer.

Identify or create an operating system userid that will be used to install and run iServer. On a Windows machine, this user should have local administrator privileges and you must not use the LocalSystem user. On a UNIX machine, the userid must have appropriate permissions to install and run iServer.

Make sure that you have installed JDK 1.3.1 or a subsequent compatible version on this machine. If it is not already created, then create an environment variable called **JAVA_HOME** that points to the root directory of your Java installation.

- The Actuate Server machine must be able to establish a network connection to the database server on which the Knowledgebase is installed.

Attention: Make sure that the Actuate Server machine has appropriate client software installed in order to connect to the database server.

DB2: to connect to a DB2 server, you must ensure that the appropriate DB2 client software has been installed on the Actuate Server machine. Make sure that the following environment variables are set:

DB2INSTANCE: set to the instance running the Knowledgebase

DB2DIR: set to the location of the DB2 client software; for example, C:\Program Files\IBM\SQLLIB

Oracle: to connect to an Oracle database server, you must ensure that the appropriate Oracle 9i client software has been installed and that a tnsname alias has been established for the Knowledgebase database server.

SQL Server: to connect to a SQL Server database, you must set up the database server as an ODBC source, specifying the username and password that the Comergent eBusiness System uses to connect to the database server.

The Actuate Server machine should usually be distinct from the Comergent eBusiness System machine, although in theory you can use the same machine for all these functions. For performance reasons, our recommendation is for you to use a separate machine for the Actuate Server machine. In these instructions, we refer to this machine name as *actuate_server*.

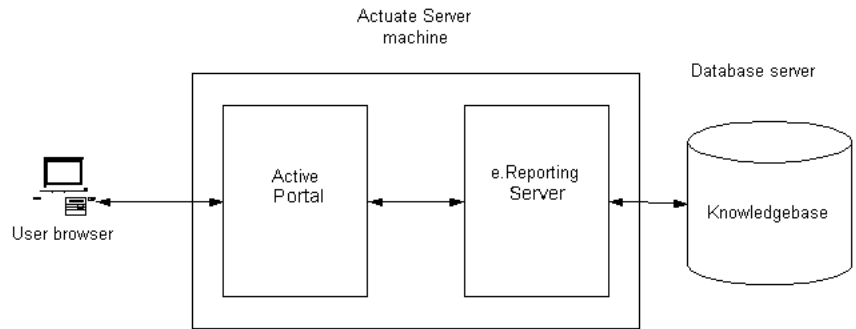


FIGURE 14. Implementing C3 Analyzer

Attention: You *must* use the default directory locations suggested by the Actuate install scripts for this installation to succeed.

- On the Actuate Server machine, identify the directory into which you plan to install the Actuate software components. We refer to this as **actuate_home**. Typical UNIX and Windows installations will have these values:

TABLE 15. **actuate_home** Locations

Operating System	actuate_home
UNIX	/apps/actuate8
Windows	C:\Program Files\Actuate8

The following installation procedure assumes that the Actuate Server software components are installed on the same machine. Follow these procedures, and consult the Actuate documentation for further details. We provide the relevant Actuate documentation as part of the Actuate installation set.

The following ports are used by this installation of the Actuate Server software components: 8071, 8072, 8700, 8701, 8702, 8703, 8704, 8900, 8901, 8902, 8903, 8904. Make sure that no other processes are using these ports or be prepared to identify alternate ports. See "Port Access" on page 254 for a detailed description of the access that each port requires.

Note that the 8701, 8702, 8703, 8704, 8901, 8902, 8903, 8904 ports are not set during the installation UI: to change these you must edit the **server.xml**

configuration files of the two embedded Tomcat instances used to support the Management Console and Active Portal components.

To Install the iServer Component

If you choose to install iServer in a non-default location, then when prompted, enter the location of the *actuate_home* for the installation directory. The iServer software will be installed into a sub-directory under here. On Windows, it is: *actuate_home/Server/* and on UNIX it is *actuate_home/AcServer/*. We refer to this directory as *actuate_server_home*.

1. On UNIX, to prepare the install scripts, you should do the following:
 - a. Change the permissions on the installation files by navigating to the **iserver/** directory, and running:

```
chmod -R 775 *
```
 - b. Open the **isinstall.sh** script and comment out the commands that clear the command console window: these are the “clear” lines in the script.. This helps you troubleshoot the installation if you run into difficulties.
2. Unzip the license key file in an appropriate location on the hard drive of the Actuate Server machine.
3. Create a system environment variable ICU_DATA. This should take the following value:
 - on Windows: the location of the system32/ drive. For example, C:\WINDOWS\system32
 - on UNIX: it should point to *actuate_server_home/lib*.
4. Install the iServer software on the Actuate Server machine. If asked, select Custom Installation and accept the default settings except for the following:
 - When prompted, enter the full path to the location of the license key file.
 - For Windows: select your current userid as the account to run the service and leave both **Automatically start Process Management Daemon when Windows boots** and **Automatically start iServer when Process Management Daemon starts** checked.
 - Set the PMD port to 8071
 - Set the iServer port to 8072.

- Enter an appropriately secure Administrator password.

Note:	Actuate iServer has two administrators: a system administrator and a volume administrator. Both have the same username “Administrator”. In this step we set the system administrator’s password and later we shall change the volume administrator’s password to the same value. Unless you need to distinguish between these two functions, then we suggest using the same password for both.
--------------	--

- Set the default volume name to “ComergentVolume”.
 - Accept the default port number, 8900, for the management console.
 - You can accept the default context path “/acadmin”, or you can change it: we refer to this value as *admin_root*.
 - If prompted to specify database drivers, respond “y” to the database server type that you use for the Knowledgebase, and enter the appropriate database information: for example, the absolute path to the ORACLE_HOME of the Oracle client installation.
5. Create a sub-directory under the *actuate_server_home* directory: *actuate_server_home/Comergent/* on the Actuate Server machine.
 6. Set up the database connection information:
 - a. Oracle: Verify that the Actuate Server machine has a valid entry in its Oracle client **tnsnames.ora** file to point to the Comergent eBusiness System Knowledgebase database server.
 - b. SQL Server: On the Actuate Server machine, set up the Knowledgebase database server as an ODBC source. When setting up the ODBC data source:
 - Leave “Use ANSI quoted identifiers” checked.
 - Leave “Use ANSI nulls, paddings and warnings” checked.
 - Uncheck “Perform translation for character data”.

To Access the Management Console

1. Open the Management Console by pointing your browser to:
`http://<actuate_server>:8900/<admin_root>/login.jsp`
2. A login page should be displayed with “Log in to volume ComergentVolume” at the top. You can bookmark this URL for future use. If a login page is not displayed or the volume still cannot be found, then try to restart the Actuate

Server services or daemons, and verify that the iServer and Actuate HTTP service have started. See "To Restart Actuate Services or Daemons" on page 237 for details.

If the login page is displayed, but the ComergentVolume is missing, then try waiting a couple of minutes before trying again. If you do not see Management Console home page, or the volume still cannot be found, then you must troubleshoot your installation using the Actuate documentation.

3. To verify that you can log in as the system administrator, from the drop-down list under "Log in to volume ComergentVolume", select System Administration. Leave the username as Administrator, enter the password you entered when installing the iServer, and click **Log In**.
4. Click **Logout**.
5. On the Login page, select from the Login drop-down list, ComergentVolume.
6. Leave the username as Administrator, leave the password field blank, and click **Log In**.
7. If the Management Console home page is displayed, then you have successfully installed iServer and the Management Console.
8. Change the password for the ComergentVolume administrator as follows:
 - a. Click **Users**.
 - b. Select the Administrator user.
 - c. On the General tab, change the password to the same value as entered for the system administrator in "To Install the iServer Component" on page 234, Step 4 above.
 - d. Click **Apply**.
 - e. Click **OK**.
9. Log out.

To Install the Active Portal

1. Install the Active Portal following the onscreen instructions. Select Custom Installation and accept the default settings except for the following:
 - If asked, enter an appropriate language and timezone for the installation.
 - Set the port by which Active Portal accesses the iServer to 8072.
 - Change the Encyclopedia volume name to "ComergentVolume".

- Enter “/acweb” for the Context root for ActivePortal.
- 2. When installation is successful, change the value of PROGRESSIVE_REFRESH parameter in **actuate_home/ActivePortalJSP/WEB-INF/web.xml** to 30 or 60 seconds. This determines how frequently the report pages are refreshed and can help with long-running reports.
- 3. Stop and restart the Actuate HTTP Service.
- 4. Point your browser to:

http://<actuate_server>:8700/acweb/login.jsp

You should see a login page with “ComergentVolume” as the volume name. Enter “Administrator” as the username and enter the password previously set in Step 8 above.
- 5. Click **Log In**.

The Active Portal home page for the ComergentVolume volume should be displayed. If it is not, then troubleshoot the problem as described in "To Access the Management Console" on page 235.
- 6. Click **Log out**.

Identify the Actuate HTTP Service root directory: we refer to this as **actuate_HTTP_root**. Typical UNIX and Windows installations will have these values:

TABLE 16. **actuate_HTTP_root** Locations

Operating System	actuate_HTTP_root
UNIX	actuate_home/actuate_http_service
Windows	C:\Program Files\Common Files\Actuate\8.0\Actuate HTTP Service

To Restart Actuate Services or Daemons

- On a Windows machine, you can restart the Actuate Process Management Daemon and Actuate HTTP Service by using the Services Control Panel applet.
- On a UNIX machine, you can restart the Actuate Server daemon and the Actuate HTTP Service as follows:
 - a. Navigate to **actuate_server_home/bin/**, and enter:

```
shutdown_srvr.sh  
nohup start_server.sh &
```

b. Navigate to ***actuate_HTTP_root/bin/***, and enter:

```
shutdown.sh  
startup.sh
```

To configure your system to start Actuate iServer on reboot, run the script ***actuate_server_home/bin/rclocal.sh*** as root.

To Install the e.Report Designer Professional

This software can be used to manage and customize reports. It can be run on any Windows machine that meets the requirements of the software. This machine must be able to access the Actuate Server machine over a LAN. We shall refer to the destination directory location of the Actuate software as ***actuate_designer_home***. In a typical installation of Actuate in Windows, the ***actuate_designer_home*** directory is **C:\Program Files\Actuate8**.

1. Install the Windows application Actuate e.Report Designer Professional on the Actuate Server machine or onto a machine that can manage the Actuate Server machine from its location. Select Typical Installation and accept the default values presented.

To Install the Actuate Documentation

The Actuate 8 documentation is installed using an installation executable. Follow the Actuate instructions to run this, and when prompted install the documentation for all components.

Configuration

Actuate Server Steps

These steps are performed on the machine on which the Actuate Server components are installed.

1. If the Knowledgebase is running on Oracle, then create an environment variable on the Actuate Server machine called **NLS_LANG** and set this to the same value set on the Oracle database server machine. Typically, it is set to: **<LANGUAGE>_<COUNTRY>.<CHARSET>**, and the **CHARSET** part must be set to **UTF8**. For example, on a typical Comergent eBusiness System whose system locale is **en_US**, set this value to: **AMERICAN_AMERICA.UTF8**.
2. Copy the **ComergentConfig.xml** file from the location ***cmgt_analyzer_home/WEB-INF/reports/*** to ***actuate_server_home/Comergent/***.

3. Edit **ComergentConfig.xml** with the database connection information required to connect to the Comergent eBusiness System Knowledgebase. See "ComergentConfig.xml Configuration File" on page 241.

Attention: When you save the edited file, make sure that you save it in a text file format suitable for the operating system on which the Actuate Server is running.

4. Save a copy of *actuate_home/ActivePortalJSP/viewer/viewnavigation.jsp* as *actuate_home/ActivePortalJSP/viewer/viewnavigation.jsp.orig*.
5. Copy from the *cmgt_analyzer_home/WEB-INF/reports/custom/viewnavigation.jsp* to *actuate_home/ActivePortalJSP/viewer/viewnavigation.jsp*.
6. Copy from *cmgt_analyzer_home/WEB-INF/reports/custom/blankpage.html* to *actuate_home/ActivePortalJSP/*.
7. Save *actuate_home/ActivePortalJSP/private/common/errors/error.jsp* to *actuate_home/ActivePortalJSP/private/common/errors/error.jsp.orig*.
8. Copy from *cmgt_analyzer_home/WEB-INF/reports/custom/error.jsp* to *actuate_home/ActivePortalJSP/private/common/errors/*.
9. Copy from *cmgt_analyzer_home/WEB-INF/reports/custom/login.jsp* to *actuate_home/ActivePortalJSP/private/*.
10. Point your browser to the Management Console:
`http://<actuate_server>:8900/<admin_root>/login.jsp`
11. Select System Administration from the drop-down list. Log in as "Administrator" using the password you specified above.
12. Click **Servers**.
13. Click the link to this installation of the Actuate Server.
14. Selected the Advanced tab.
15. In the boxed list, click "Runtime".
16. In the dialog box, for the Configuration file for database connections and search paths value, enter the absolute path to the **ComergentConfig.xml** file: *actuate_server_home/Comergent/ComergentConfig.xml* (for example, C:\Program Files\Actuate8\Server\Comergent\ComergentConfig.xml).
17. Click **OK**.

18. Select the Factory Service tab.
19. Change Max synchronous job runtime to 600.
20. Change Transient report timeout to 1440.
21. Click **Apply**.
22. Click **OK**.
23. Click **Logout**.
24. Using your preferred text editor, open the *actuate_server_home/etc/acserverconfig.xml* file.
25. Change the value of the MaxSyncJobRuntime attribute to “3600” and save the file.
26. Restart the Actuate Server daemon.
27. Create a sub-directory under the *actuate_server_home* directory:
actuate_server_home/CatalogImages/.
28. Under this, create a directory with a unique name for this implementation of **C3 Analyzer**. We refer to this as *report_folder*, so the full directory path is *actuate_server_home/CatalogImages/report_folder*. Each installation of **C3 Analyzer** on this installation of the Actuate Server must have a unique name, and so if you plan more than one such installation, make sure to select a distinctive folder name for each. For example, for the reference Matrix implementation, you might use “matrix”.
29. Copy from the Comergent eBusiness System machine, *cmgt_analyzer_home/WEB-INF/reports/images_comergent/catalog_logo.jpg* and *debs_home/Comergent/WEB-INF/reports/images_comergent/missing_image.jpg* to *actuate_server_home/CatalogImages/report_folder/*.
30. Point your browser to the Management Console URL that you bookmarked, and log in as the ComergentVolume volume administrator using the password you specified when installing the iServer.
31. Click **Files & Folders**.
32. Click **Create Folder**.
33. On the **General** tab, name the new folder *report_folder* and click **Apply**.
34. Select the **Privileges** tab.

35. Make sure that the Roles radio button is selected, and select the All role in the Available panel and move it to the Selected panel. At the bottom of the Selected panel, check all the check boxes. Click **Apply**.
36. Click **Users**.
37. Click **Create User**.
38. Name the user “anonymous” and set their home folder to the folder name set in Step 33 above preceded by “/”. For example, “/matrix”. Leave the password blank for the anonymous user. Click **Apply**.

Note that if you plan to implement more than one installation of **C3 Analyzer** on this installation of the Actuate Server, then you can use a different username and set a password for the username. See "Managing Multiple C3 Analyzer Implementations" on page 250 for more details.
39. Select the **Jobs** tab for the new user.
40. For jobs that succeed, uncheck the **Place a job completion notice** check box. For jobs that fail, uncheck the **Place a job completion notice** check box. Click **Apply**.
41. Select the **Privilege Template** tab.
42. Make sure that the Roles radio button is selected, and select the All role in the Available panel and move it to the Selected panel. At the bottom of the Select panel, check all the check boxes. Click **Apply**.
43. Log out by clicking **Log Out**.

ComergentConfig.xml Configuration File

This section describes how to use the **ComergentConfig.xml** file to configure the connection information between the Actuate Server and the Comergent eBusiness System Knowledgebase.

1. Open **ComergentConfig.xml** with your preferred text editor.

The next steps are database server-specific. Take care to follow the right ones:
2. For Oracle:
 - a. Copy the Connection element of type AcOracleConnection and paste it at the end of the Design section of the file. Modify the Alias and connection information. Rename the ConfigKey to a unique name for that Comergent eBusiness System implementation:

```
<Connection Type="AcOracleConnection"
  Alias="Test Oracle Connection">
  <Property PropName="HostString">
    tns_alias
  </Property>
  <Property PropName="UserName">
    username
  </Property>
  <Property PropName="Password">
    password
  </Property>
  <Property PropName="ConfigKey">
    matrix_orcl
  </Property>
</Connection>
```

- b. Copy the ConnectOptions element of type comergent_orcl and paste it at the end of the Runtime section of the file. Edit the Type value to match the ConfigKey value in the Connection element just created (for example matrix_orcl). Edit the connection information to match the information provided in Step a:

```
<ConnectOptions Type="matrix_orcl">
  <Property PropName="HostString">
    tns_alias
  </Property>
  <Property PropName="UserName">
    username
  </Property>
  <Property PropName="Password">
    password
  </Property>
</ConnectOptions>
```

For SQL Server:

- a. Copy the Connection element of type AcODBCConnection and paste it at the end of the Design section of the file. Modify the Alias and connection information. Rename the ConfigKey to a unique name for that Comergerent eBusiness System implementation:

```
<Connection Type="AcODBCConnection"
  Alias="Test ODBC Connection">
  <Property PropName="DataSource">
    odbc_connection
  </Property>
  <Property PropName="UserName">
    username
  </Property>
```

```
<Property PropName="Password">
    password
</Property>
<Property PropName="ConfigKey">
    matrix_odbc
</Property>
</Connection>
```

- b. Copy the `ConnectOptions` element of type `comergent_odbc` and paste it at the end of the `Runtime` section of the file. Edit the `Type` value to match the `ConfigKey` value in the `Connection` element just created. Edit the connection information to match the information provided in Step a:

```
<ConnectOptions Type="matrix_odbc">
    <Property PropName="DataSource">
        odbc_connection
    </Property>
    <Property PropName="UserName">
        username
    </Property>
    <Property PropName="Password">
        password
    </Property>
</ConnectOptions>
```

For DB2:

- a. Copy the `Connection` element of type `AcDB2Connection` and paste it at the end of the `Design` section of the file. Modify the `Alias` and connection information. Rename the `ConfigKey` to a unique name for that Comergent eBusiness System implementation:

```
<Connection Type="AcDB2Connection"
    Alias="DB2 Connection">
    <Property PropName="DataSource">
        DB2 alias
    </Property>
    <Property PropName="UserName">
        username
    </Property>
    <Property PropName="Password">
        password
    </Property>
    <Property PropName="ConfigKey">
        comergent_db2
    </Property>
</Connection>
```

- b. Copy the `ConnectOptions` element of type `comergent_db2` and paste it at the end of the `Runtime` section of the file. Edit the `Type` value to match the

ConfigKey value in the Connection element just created. Edit the connection information to match the information provided in Step a:

```
<ConnectOptions Type="comergent_db2">
  <Property PropName="DataSource">
    DB2 alias
  </Property>
  <Property PropName="UserName">
    username
  </Property>
  <Property PropName="Password">
    password
  </Property>
</ConnectOptions>
```

Comergent eBusiness System Steps

To perform these next steps, point your browser to the Comergent eBusiness System.

1. Log in to the Comergent eBusiness System as an enterprise administrator.

The next steps create a partner to be used for Actuate messages

2. Click **Go** in the Search for Organization by Name panel.
3. Click **Create Profile**.
4. Create a partner profile for “C3 Analyzer Profile”. Set the following properties in the profile:
 - XML Message Version: Actuate SOAP 1.0
 - Message URL: `http://<actuate_server>:8072/soap/servlet/acweb`
 - Other required fields can be given any placeholder values.

After you have saved the partner profile, make a note of its partner key.

The next steps set the Actuate Server properties in the Comergent eBusiness System.

5. Navigate to the Analyzer system properties page in System Administration. Set the following system properties:

TABLE 17. C3 Analyzer System Properties

Property	Value
C3 Analyzer Database Connection	The ConfigKey value you specified in the ComergentConfig.xml file. For example, “matrix_orcl”
C3 Analyzer Directory	The name of the report folder you created in Step 33 above.
C3 Analyzer Directory: Links	The name of the report folder you created in Step 33 above.
C3 Analyzer Partner ID	The partner key for the profile that you created in Step 4.
C3 Analyzer Servlet URL	http://<actuate_server>:8700/acweb If the Actuate Server has a fully qualified domain name (for example, comergent.com), then include the domain name in the URL.
C3 Analyzer Server Username C3 Analyzer Server Password	If the user you created in Step 38 above is not “anonymous”, then change the C3 Analyzer Server Username and C3 Analyzer Server Password system property values to the ones you created in Step 38.

6. Click **Save All and Return to List**.
7. Log off.

Actuate e.Report Designer Professional Steps

These steps are performed on the machine on which Actuate e.Report Designer Professional is installed. The reports are provided by in a JAR file, **analyzer.jar**, which is provided in the Release JAR file. You should copy this file into a temporary location on the e.Report Designer Professional machine.

1. On the e.Report Designer Professional machine, create a directory called **actuate_designer_home/MyReports/Comergent/**.

2. Unjar the **analyzer.jar** JAR into the *actuate_designer_home/MyReports/Comergent/* directory on the e.Report Designer Professional machine. If you ever need to customize the reports, then you will use these files.
3. Start e.Report Designer Professional.
4. Select **Tools -> Options...**
5. On the General tab, check the **Enable Navigator menu item and toolbar** check box.
6. Click **OK**.
7. Select **File -> Navigator...**, and log in to the iServer using the username and password that you created in Step 38 above (the server field may be left blank).
8. Select the *report_folder* folder that you created and named in Step 33 above in the Encyclopedia tree.
9. Right-click this folder, and click **Add...**
10. In the Save to Volume window, navigate to the appropriate reports database-specific folder under *actuate_designer_home/MyReports/Comergent/* (for example, *actuate_designer_home/MyReports/Comergent/oracle/*). Select all the *.rox files, and click **Save**.

A progress bar displays the upload of the reports to the iServer.

11. Close e.Report Designer Professional by selecting **File -> Exit**.

You can verify that your installation of e.Report Designer Professional is working by starting the application and verifying that you can open one of the Comergent eBusiness System reports.

To Test the C3 Analyzer Installation

You can test that the configuration is correct as follows:

1. Log into the Comergent eBusiness System as an enterprise user.
2. Navigate to the **C3 Analyzer** home page by clicking **Go** next to Commerce, Sales and Product Dashboards.
3. Click on **Dashboard Graphs**.
4. On the Schedules page, check the **Run immediately** check box for each dashboard.
5. Click **Submit**.

- a. If the resulting message indicates success, then navigate to the dashboard pages and verify that the report graphs are correctly displayed.
- b. If the resulting message indicates failure, then troubleshoot your installation using the section "Troubleshooting" on page 254.

Scheduling the Reports

As noted above, the dashboard reports include graphs: these are designed to be generated as scheduled tasks set up on the Actuate Server. As part of implementing **C3 Analyzer** you must ensure that these are set up. The Dashboard Graphs page allows you to schedule these reports as you need them.

Setting Up a Secure Actuate Server

This section describes how to upgrade from an existing Actuate Server installation to a secure Actuate server.

Security Requirements

To implement a secure installation of the Actuate servers, you must ensure either that the Actuate Server and the Comergent eBusiness System machine use the same domain name (such as comergent.com) or that they are both accessed through the same Web server. This secure implementation relies on cookies set in the users' browsers: to use a secure installation, make sure that your enterprise users have cookies enabled in their browsers.

To Set Up a Secure Actuate Server

Follow these steps:

1. Stop and restart the Actuate services. This is to log out any users who might be currently logged into the Actuate Server.
1. Log into the Management Console using the URL:
`http://<actuate_server>:8900/acadmin/login.jsp`
and the Actuate Volume Administrator username and password created earlier.
2. Click **Users**.
3. Click **Create User**.

4. Create a new user with a secure password. Assign “*report_folder*” as their personal folder where *report_folder* is the unique folder name created in Step 33 above. Click **Apply**.
5. Select the Jobs tab.
6. For jobs that succeed, uncheck the **Create Completion Notice** check box. For jobs that fail, uncheck the **Create Completion Notice** check box. Click **Apply**.
7. Select the Privilege Template tab.
8. Make sure that the Users radio button is selected, select the newly-created user in the Available panel, and move it to the Selected panel. At the bottom of the Selected panel, check all the check boxes. Click **Apply**.
9. Log out by clicking **Logout**.
10. Copy from the Comergent eBusiness System machine *debs_home/Comergent/WEB-INF/reports/security/analyzer.jar* to the *actuate_home/ActivePortalJSP/WEB-INF/lib/* directory.
11. Copy *debs_home/Comergent/WEB-INF/lib/blowfish11.jar* to the *actuate_home/ActivePortalJSP/WEB-INF/lib/* directory.
12. Open *actuate_home/ActivePortalJSP/WEB-INF/web.xml* with a text editor.

Find this entry:

```
<context-param>
  <!--
    Enable External Authentication by setting the Security
    Manager class name.
  -->
  <param-name>SECURITY_MANAGER_CLASS</param-name>
  <param-value/>
</context-param>
```

Change it to:

```
<context-param>
  <!--
    Enable External Authentication by setting the Security
    Manager class name.
  -->
  <param-name>SECURITY_MANAGER_CLASS</param-name>
  <param-value>
    com.comergent.apps.mktAnalyzer.securityActuate.-
    AnalyzerSecurityManager
  </param-value>
</context-param>
```

Note: remove the hyphen in the class name.

13. Restart the Actuate HTTP Service.
14. Log into the Comergent eBusiness System as a system administrator, and navigate to the Analyzer Properties system administration section.
15. Set the following values:

TABLE 18. C3 Analyzer System Properties

Property	Value
C3 Analyzer Domain	The fully qualified domain as described in "Security Requirements" on page 247.
C3 Analyzer Security	True.
C3 Analyzer Server Username C3 Analyzer Server Password	Set these values to the ones for the user you created in Step 4.
C3 Analyzer Servlet URL	Make sure that this value includes the full domain name.

16. Perform the following check that the system is secure by verifying that you cannot access the reports directly using the Actuate Server URL. Point your browser to:


```
http://<actuate_server>:8700/acweb/login.jsp
```

You should see a login page. Whatever username and password you enter, you should see an error message indicating a security failure. Note that you can still access the Management Console because it runs on its own separate server.
17. Log into the Management Console as the Administrator. Use:


```
http://<actuate_server>:8900/acadmin/login.jsp
```
18. Delete the anonymous user by clicking **Users**, check the check box next to the anonymous username, and select **Delete** from the **Act upon selected users** menu.
19. Select **Files & Folders**.
20. Click on the **report_folder** folder created for this implementation of C3 Analyzer.
21. Check the **Select all items** check box.
22. Click **Act upon selected items** and select **Properties**.
23. Click the Privileges tab.

24. Make sure that the Roles radio button is selected. Select All in the left panel and use the arrow to move it to the Add these privileges panel. Check the **All** check box. Click **Apply**.
25. Log out of the Management Console.
26. Log into the Management Console as the user created in Step 4. Verify that you can view all the **C3** Analyzer reports.
27. Log out of the Management Console.

Internationalization and Localization

C3 Analyzer supports the full-featured capabilities of internationalization of the Comergent eBusiness System. It supports multiple languages within a single installation.

Attention:	The localization resources are not yet available for Release 8 of the Actuate software. If you want to localize your installation of C3 Analyzer, then contact Comergent Technologies Customer Support.
-------------------	--

Managing Multiple C3 Analyzer Implementations

This release of the Comergent eBusiness System is designed to support multiple implementations of **C3** Analyzer on a single installation of the Actuate Server. In this way, you can use one installation of the Actuate Server to support multiple installations of the Comergent eBusiness System in such a way as to ensure that users can only see reports that are part of their **C3** Analyzer implementation.

Note:	If an implementation of C3 Analyzer is set up to access a Comergent eBusiness System Knowledgebase running on Oracle, then the NLS_LANG variable has already been set for this database, and so all other implementations on the same Actuate Server must use the same setting.
--------------	--

This section describes how to add a new **C3** Analyzer implementation to an installation of the Actuate Server which is already running existing **C3** Analyzer implementations.

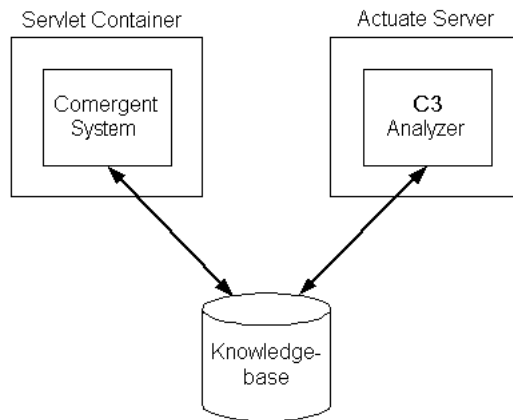


FIGURE 15. Single Implementation of C3 Analyzer

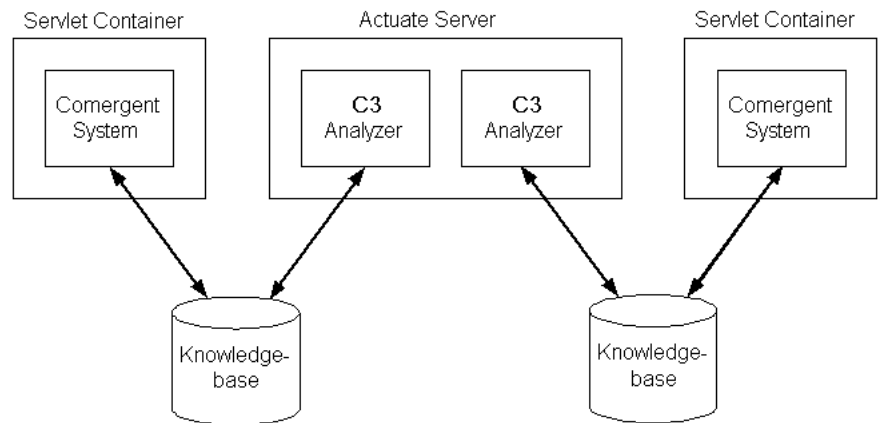


FIGURE 16. Multiple Implementations of C3 Analyzer

If you have more than one implementation of **C3 Analyzer** in a single Actuate Server, then you must use different Actuate Server folders for the reports of each implementation. You must also create different Actuate Server users for each implementation and give these users access only to their corresponding folders.

Follow these steps to add a **C3 Analyzer** implementation to an existing installation of the Actuate Server. When instructions refer to the Comergent eBusiness System,

make sure that you are working the installation of the Comergent eBusiness System that is intended to use the new implementation of **C3 Analyzer**.

1. Under **actuate_server_home/CatalogImages/**, create a directory with a unique name for this implementation of **C3 Analyzer**. We refer to this as **report_folder**, so the full directory path is **actuate_server_home/CatalogImages/report_folder**.
2. Copy from the Comergent eBusiness System machine, **debs_home/Comergent/WEB-INF/reports/images_comergent/catalog_logo.jpg** and **debs_home/Comergent/WEB-INF/reports/images_comergent/missing_image.jpg** to **actuate_server_home/CatalogImages/report_folder/**.
3. Log into the Management Console as the volume administrator using the Administrator username and password that you have previously created.
4. Create a new folder with the name **report_folder**: this identifies as being the folder for the new implementation, say "anderel". Every implementation must have its own unique folder on the Actuate Server.
5. Create a new user on the Actuate Server.
6. Select the folder that you created in Step 4 and grant All permissions on this folder to the user that you created in Step 5.
7. Follow the instructions provided in "Setting Up a Secure Actuate Server" on page 247 to set up the Comergent eBusiness System.
8. Edit the **ComergentConfig.xml** file by adding new entries to point to the Knowledgebase for the Comergent eBusiness System. Each **C3 Analyzer** implementation supported by the Actuate Server should have a pair of **Connection** and **ConnectOptions** elements defined in this file. Note that the value of the **ConfigKey** used to identify these entries should be made effectively unguessable: otherwise another Comergent eBusiness System accessing the same Actuate Server could attempt to use the same **ConfigKey**.
9. Log into the Comergent eBusiness System as a system administrator, and navigate to the Analyzer Properties system administration section.

10. Set the following values:

TABLE 19. C3 Analyzer System Administration Properties

Property	Value
C3 Analyzer Database Connection	The ConfigKey value you specified in the ComergentConfig.xml file in Step 8. For example, "matrix_orcl".
C3 Analyzer Directory	Set to the name of the folder created in Step 4
C3 Analyzer Directory: Links	Set to the name of the folder created in Step 4
C3 Analyzer Domain	The fully qualified domain as described in "Security Requirements" on page 247
C3 Analyzer Security	True
C3 Analyzer Server Username C3 Analyzer Server Password	Set these values to the ones for the user you created in Step 5.
C3 Analyzer Servlet URL	Make sure that this value includes the full domain name

11. Log out.
12. Restart the Actuate Server.

Migration From Previous Versions of C3 Analyzer

If you are running only standard reports from the Comergent eBusiness System Web user interface, then you only need to install the new version of the Comergent eBusiness System following the instructions provided. Note that although Actuate Release 7 still supports ReportCast, it is no longer used in the standard **C3 Analyzer** installation.

If you are accessing additional custom reports through the Analyzer UI, then the updated UI will need to be customized to contain those reports. For instructions on how to add report links to the new UI, contact Comergent customer support.

If you have custom reports, then the report designs and executables will need to be upgraded to Actuate Release 8. For instructions on upgrading designs, see Appendix B of **developing-basic-reports.pdf**. For upgrading the iServer and report encyclopedia, see Page 5 of **iserver-system-install.pdf**.

If you have report documents and/or executables that you wish to preserve, then you can migrate them to the new Actuate 8 encyclopedia. For instructions on how

to do this, see the sections entitled “Using acexport” and “Using acimport” starting on Page 474 of **administering-iserver-system.pdf**.

Port Access

When setting up *C3 Analyzer*, the following ports are used: make sure that they have the appropriate access as described in this table:

TABLE 20. Port Access Table

Port	
8071	Local access only ^a
8072	Comergent eBusiness System must be able to HTTP POST to this port.
8700	All consumers of reports must have HTTP access to this port.
8701	Local access only
8702	Local access only
8703	Local access only
8704	Local access only
8900	Management Console port: the system administrator must have HTTP access to this port from a system on which they run a browser.
8901	Local access only
8902	Local access only
8903	Local access only
8904	Local access only

- a. Local access only means that the port only needs to be accessible from other applications running on the same system.

Troubleshooting

This section covers problems that you may encounter while installing or running *C3 Analyzer*.

TABLE 21. Troubleshooting C3 Analyzer

Symptom	Diagnosis	Solution
Blank pages when viewing or printing PDF versions of reports.	Caching is preventing the correct version of the PDF file from being displayed.	<p>Identify the two files:</p> <p><i>actuate_home/ActivePortal/WEB-INF/web.xml</i> <i>actuate_home/Server/mgmtconsolehttpserver/mgmtconsole/conf/web.xml</i></p> <p>In each of them, change:</p> <pre><context-param> <param-name>CACHE_CONTROL</param-name> <param-value></param-value> </context-param></pre> <p>to:</p> <pre><context-param> <param-name>CACHE_CONTROL</param-name> <param-value>no-store</param-value> </context-param></pre>
<p>Navigating to a report displays an error message:</p> <p>Database Error 3: Database login failed.</p>	The <i>actuate_server_home/Comergent/ComergentConfig.xml</i> file has incorrect values in it or is saved in an incorrect file format.	<p>Edit <i>actuate_server_home/Comergent/ComergentConfig.xml</i> file to provide the correct connection information to the Comergent eBusiness System Knowledgebase. Check that the file is saved in PC format if the Actuate Server is running on a Windows machine.</p> <p>Check that the format of the file follows the correct format for the Oracle or SQL Server database connection.</p> <p>Check that the Actuate Server daemon is restarted after making changes to the <i>ComergentConfig.xml</i> file.</p>

TABLE 21. Troubleshooting C3 Analyzer (Continued)

Symptom	Diagnosis	Solution
<p>The report page displays an error message:</p> <p>The page cannot be displayed.</p>	<p>The Actuate Server has not been started. If you can, point your browser to:</p> <pre>http:// <actuate_server>:8900/ <admin_root>/login.jsp</pre> <p>If you get the same message, then the Actuate Server is not running.</p> <p>If you can see the Actuate Server Volume Log In page, then see below.</p>	<p>Check the Actuate Server machine and start the processes if they are not running.</p>
	<p>If you can see the Actuate Server Volume Log In page, then the Actuate Server is running, but the Comergent eBusiness System is not configured to point to it.</p>	<p>Navigate to the System Services -> C3 Analyzer page. Set the C3 Analyzer Servlet URL to:</p> <pre>http://<actuate_server>:8700/acweb</pre> <p>If you are using a machine name for the Actuate Server, then check that you can resolve the machine name from the Comergent eBusiness System machine. For example, at the command line, enter:</p> <pre>ping <actuate_server></pre> <p>If the machine name does not resolve correctly, then use the IP address of the Actuate Server machine as the value of the C3 Analyzer Servlet URL property. However, note that sometimes the ping port may be blocked even when HTTP access through port 8700 is permitted.</p>

TABLE 21. Troubleshooting C3 Analyzer (Continued)

Symptom	Diagnosis	Solution
<p>A dialog box is displayed that reads:</p> <p>Failed to connect to server http://<actuate_sever>:8072. Please ensure that the server has been started and the port number is correct.</p>	<p>The Actuate Server is not resolving its own machine name correctly.</p>	<p>Edit the files:</p> <p>actuate_home/Server/etc/acpmdconfig.xml</p> <p>actuate_home/Server/etc/acserverconfig.xml</p> <p>Change occurrences of the Actuate Server machine name to “localhost”. Do not change the values of the SystemDefaultVolume and RequesterRSAPIVolume elements and the Name attribute of the Volume element.</p> <p>Open the files:</p> <p>actuate_home/ActivePortal/WEB-INF/web.xml</p> <p>actuate_home/Server/mgmtconsolehttpserver/mgmtconsole/conf/web.xml</p> <p>Verify that the SERVER_DEFAULT parameter has the correct port value in each (8072 in a default installation of the Actuate Server).</p> <p>Restart the Actuate Server processes.</p>
<p>The report page displays an error message that reads:</p> <p>Assert statement failed.</p>	<p>The report files do not match the database server type.</p>	<p>If the Comergent eBusiness System Knowledgebase is running on Oracle, then make sure that you have copied over the ROX files from actuate_designer_home/MyReports/Comergent/oracle/.</p> <p>If the Comergent eBusiness System Knowledgebase is running on SQL Server, then make sure that you have copied over the ROX files from actuate_designer_home/MyReports/Comergent/mssql/.</p>
	<p>If the report files do correctly match the database server type, then there may be a SQL error.</p>	<p>Contact your Comergent Technologies, Inc. representative.</p>

TABLE 21. Troubleshooting C3 Analyzer (Continued)

Symptom	Diagnosis	Solution
Dashboard graphs are not displayed and the graph frame is blank.	First, check to see if other reports can be run. If not, then follow the troubleshooting diagnoses described above.	If the error is specific to a dashboard graph, then try to run the dashboard graph manually using the Actuate Management Console. If this works, then they will now display correctly through the Comergent eBusiness System.
	If the dashboard graph does not run using the Actuate Management Console, then follow the troubleshooting diagnoses described above.	If the dashboard graphs reports run successfully, but no graph is produced, then the cause may be that there is no data available. If you can verify that data is present for the missing dashboard graph, then contact your Comergent Technologies, Inc. representative.
Invoking e.Analysis results in a blank window.	Sometimes there can be a delay of up to a minute before the e.Analysis applet loads. If waiting does not help, then the browser could be missing a Java plugin.	Install the Java plugin into the browser machine. You can download and install the Java plugin from: http://java.sun.com/getjava or http://java.sun.com/getjava/BrowserRedirect?locale=en

This release of the Comergent eBusiness System supports the ability to integrate your order management processing with an external payment gateway to manage credit card processing. In this chapter we describe the setup steps required to manage your payment gateway. This supersedes the earlier capability to manage credit card authorization described in "Credit Card Authorization" on page 317.

Note that if you do implement a payment gateway, then you should consider the order state machines used by the enterprise and storefront partners (see CHAPTER 21, "Order and Return Management" for more details). In particular, we recommend making the Cancelled, Rejected, and Shipped states in the storefront order state machine end states, or consider carefully what should happen to transactions if there are transitions out of these states.

Procedure for Enterprise Partner

Typically, you will want to set up credit card processing for your own organization: the Enterprise partner. If you want your implementation of the Comergent eBusiness System to support credit card processing for one of your sales partners, then follow the steps described in "Procedure for Sales Partner" on page 261.

To Set Up the Payment Gateway for the Enterprise

1. Identify or create a directory on the servlet container machine in which you will store merchant certificates and the logging files. We refer to this directory as ***cmgt_gateway***. We recommend that you create a sub-directory ***cmgt_gateway/logging/*** for the log files.
2. Obtain a merchant certificate from the gateway provider, for example CyberSource. The merchant certificate is a file that is used to authenticate your transactions with the gateway, and it must be associated with your merchant id. A typical name for the file is ***cmgt.p12***.
3. Copy the merchant certificate to ***cmgt_gateway***.
4. Log into the Comergent eBusiness System as an enterprise administrator, and navigate to the Enterprise partner profile.
5. Click the Commerce tab.
6. Click **Gateway Configuration**.
7. Select CyberSource (or the name for the supported gateway) from the Credit Card Payment Processor Gateway Type drop-down list.
8. Enable CV Number Check: Set this to True if you require end-users to enter their credit card CV code before placing their credit card order.
9. Merchant ID: Enter your Merchant ID. Note that the Merchant ID string must be the basename of the merchant certificate file. For example, if the merchant certificate file is ***matrix.p12***, then the Merchant ID must be set to “matrix”.
10. Key Directory: The path to ***cmgt_gateway***.
11. Target API Version: currently, you should enter 1.7.
12. You can leave Send to Production and Enable Logging as False or change them to True as appropriate.
13. Log Directory: The path to the logging directory.
14. Log Maximum Size (MB): We suggest setting a value of 10.
15. Click **Save**.

Procedure for Sales Partner

The steps for setting up a sales partner with credit card processing are similar to those for the Enterprise partners. Only partners that are marked as Partner.com or Storefront Partners can set up payment gateways.

To Set Up a Payment Gateway for a Partner

1. Identify or create a directory on the servlet container machine in which you will store merchant certificate and the logging files for the partner. We refer to this directory as ***cmgt_gateway/partner/***. We recommend that you create a sub-directory ***cmgt_gateway/partner/logging/*** for the log files.
2. Obtain a merchant certificate from the partner, that they have obtained from the gateway provider, for example CyberSource. The merchant certificate is a file that is used to authenticate your transactions with the gateway, and it must be associated with their merchant id. A typical name for the file is **anderel.p12**.
3. Copy the merchant certificate to ***cmgt_gateway/partner/***.
4. Log into the Comergent eBusiness System as an enterprise administrator, and navigate to the partner profile for the sales partner.
5. Click the Commerce tab.
6. Click **Gateway Configuration**.
7. Select CyberSource (or the name for the supported gateway) from the Credit Card Payment Processor Gateway Type drop-down list.
8. Enable CV Number Check: Set this to True if the sales partner requires end-users to enter their credit card CV code before placing their credit card order.
9. Merchant ID: Enter the sales partner's Merchant ID. Note that the Merchant ID string must be the basename of the merchant certificate file. For example, if the merchant certificate file is **anderel.p12**, then the merchant ID must be set to "anderel".
10. Key Directory: The path to ***cmgt_gateway/partner/***.
11. Target API Version: currently, you should enter 1.7.
12. You can leave Send to Production and Enable Logging as False or change them to True as appropriate.

13. Log Directory: The path to the logging directory, typically to *cmgt_gateway/partner/logging/*.
14. Log Maximum Size (MB): We suggest setting a value of 10.
15. Click **Save**.

Customizing the Payment Gateway

The most common form of customization is to add a payment gateway. See "Adding a Payment Gateway" on page 262.

Adding a Payment Gateway

To be able to communicate with the new gateway type, follow these steps:

1. Select a new integer code to represent the new gateway type (current codes being used can be found in IPaymentGateway or by looking in the CMGT_LOOKUPS database table for the lookup type "PaymentGatewayType").
2. Write a handler class that implements the ICreditCardPaymentHandler interface to handle interaction with the new gateway. Be sure that the code writes a transaction history record to the database with the results of each requested transaction.
3. Create an entry in **ObjectMap.xml** configuration file for your new handler using the new integer code by following the instructions in the ICreditCardPaymentHandlerFactory description. Subclassing the object factory should generally not be necessary.

To be able to configure the new gateway type through the UI:

4. Add an entry for the new integer code to the CMGT_LOOKUPS database table for the lookup type "PaymentGatewayType".
5. Modify the **WEB-INF/web/en/US/payment/PGSetup.jsp** file *updateFieldVisibility()* method by adding a block to the "// Hide or display the individual fields." section for the new gateway type to control which data fields should be hidden and which should be shown when a gateway of this type is selected. (If additional payment gateway fields are added to the screen, add the necessary *hideID* calls to the other gateway blocks.)
6. Modify the PaymentSetupController class to validity check and save the fields applicable to the new gateway type (the branch-by-gateway type logic is in the *validateAndSaveGatewayInformation()* method).

Credit Card Number Checking

Credit card numbers are validated for basic correctness of form when users enter them. This validation uses the industry-standard LUHN algorithm. Please see the following URL for more information:

<http://www.ee.unb.ca/tervo/ee4253/luhn.html>.

Troubleshooting

This section describes known issues and their solution.

TABLE 22. Troubleshooting

Issue	Solution
Users see an error like this: * For card XXXXXXXXXXXX1111 - A system level processing critical error has occurred ("[Security:090549]The certificate chain received from ics2wstest.ic3.com - 66.185.180.11 contained a V3 CA certificate which did not indicate it really is a CA."). Do not attempt to retry this transaction before contacting Customer Service with the details of this message, or duplicate transactions may result.	This is a known problem when WebLogic is run in development mode. You can work around this by specifying the following system properties to the WebLogic server(s): -Dweblogic.security.SSL.enforceConstraints=off

This chapter describes how to implement **C3** Content Manager as part of your Comergent eBusiness System. **C3** Content Manager is a separately-purchasable application. Check with your Comergent Technologies, Inc. representative to determine if your implementation includes this product.

Overview

C3 Content Manager provides a means for you to serve up documents to users as part of the Comergent eBusiness System. These can include product data sheets, licensing term sheets, spreadsheets of product specifications, and prepared presentations about your products.

It is implemented as a Comergent eBusiness System widget that provides integration with a Xerox DocuShare server. In general, the DocuShare server is installed on a different machine, and it must be accessible to external users just as the Comergent eBusiness System machine is.

You must install and administer the DocuShare server using the DocuShare user interface and documentation. In these instructions we refer to the installation directory of DocuShare as ***docushare_home***.

A user of the Comergent eBusiness System accesses content on the DocuShare server as if they were a dedicated user on the DocuShare system. As you add and modify content on the DocuShare server bear in mind that if it is accessible to this

dedicated user, then users of the Comergent eBusiness System are able to see this content too.

Implementation

Follow these steps to implement **C3 Content Manager**.

1. Install the DocuShare server following the instructions provided with the product. This will include requirements information and steps required to set up administration and guest accounts on DocuShare. The DocuShare server must be installed on the same domain as the Comergent eBusiness System: that is, the URLs used to access the Comergent eBusiness System and to access the DocuShare server must both end in *yourdomain.com*, where *yourdomain* depends on your installation. This is because the DocuShare system will set a cookie in users' browsers, and this must be retrievable by the Comergent eBusiness System.
2. Set up a user on DocuShare to act as the dedicated user from the Comergent eBusiness System. This user must be set up to have access to all of the content that you want users of the Comergent eBusiness System to see. Make a note of their username and password to use in Step 5.
3. Log into the Comergent eBusiness System as an enterprise administrator, navigate to **System Services -> C3 Content Manager**.
4. Change the docushareServerURL element in the C3_Content_Manager element to point to the DocuShare server. Typically, the value of this element is:

```
http://<docushare:port>/docushare/dsweb
```

where *docushare:port* points to the DocuShare system.

5. Change the values of the docushareUser and docusharePassword properties to the values of the username and password for the DocuShare user that you created in Step 2.
6. Click **Save All and Return to List**.
7. Log out.
8. You must set the value of the bDisplayContentManager variable to "true" if you want to display the **C3 Content Manager** widget. On the **f_homeLoggedIn_body.jsp** JSP page, change the following scriptlet to set bDisplayContentManager to true.

```
<% boolean bDisplayContentManager = false; %>
```

9. The root collection used by the **C3** Content Manager is set to Collection-10. If you want to use a different collection, then modify the **f_homeLoggedIn_body.jsp** page to specify the collection. In the widget tag:

```
<cmgt:widget name='ContentMgrWidget' height='250'
            width='500'>
  numberOfCollections=4&handle=/Collection-10&displayBorders=true
</cmgt:widget>
```

change `handle=/Collection-10` to the different collection.

Creating a Custom Content View

You can create your own view of content held on the DocuShare server as follows:

1. In the page in which you want to display content using **C3** Content Manager, add a widget of the following form:

```
<cmgt:widget name="MyContentManager">
  handle=Collection-x&numberOfRows=y
</cmgt:widget>
```

The `name` parameter is used to refer to the message type that maps to the controller used to serve the content up to the widget. The `handle` parameter specifies the DocuShare collection identified by the number *x* in which the documents are located. The `numberOfRows` parameter *y* can be used to determine the number of documents displayed in the JSP page.

2. For the message type defined as the `name` parameter of the widget, create a `MessageType` declaration along these lines:

```
<MessageType Name="MyContentManager">
  <ControllerMapping>
    com.comergent.apps.contentMgmt.controller.-
      MyContentWidgetController
  </ControllerMapping>
  <JSPMapping>
    ../content/MyContentWidget.jsp
  </JSPMapping>
</MessageType>
```

3. Implement the controller declared in the `ControllerMapping` element to meet your needs for this widget. The controller should extend the `WidgetController` class and make use of the XML message API supported by DocuShare to return the list of documents in a collection. See the DocuShare API documentation for more details. The controller must process the response and create a data bean that provides the complete list of documents that the JSP page needs to display. The sample controller provided with the Comergent eBusiness System provides an example of how this is done.

4. Implement the JSP page used to display the content to the user. This must follow the rules for such JSP pages. See the *Comergent eBusiness System Developer Guide* for further information. The sample JSP page provided with the Comergent eBusiness System demonstrates the use of a JSP page to display a list of the first n documents present in the collection together with buttons that provide access to the full collection and to DocuShare's advanced search capabilities.
5. If need be, modify the **DocushareMimeType.xml** file. This file maps MIME types to icons used to represent document types in the DocuShare server. The location of the file is set by the docushareMimeType element of the **Comergent.xml** file.

This chapter describes how to expose functionality from the Comergent eBusiness System as portlets. These portlets can be deployed into any portlet container that supports the JSR-168 portlet specification.

Overview

Release 7.0 and higher of the Comergent eBusiness System provides support for Web services, and in particular provides some Web services as out-of-the-box functionality: see the *Comergent eBusiness System Developer Guide* for the details of these services. You can use these Web services to work with portlets that can be deployed to your portlet container as described below.

The Comergent eBusiness System provides some out-of-the-box portlets which can be deployed immediately, and these are described in "Implementation" on page 271.

The Comergent WS Proxy can be used as a Web services invocation API and not necessarily as part of a portlets implementation. In other words, it can be made part of any JVM process and support the dynamic invocation of Web services. The Comergent WS Proxy is fully compliant to WS-I standards and recommends the usage of the document/literal wrapped pattern.

Framework

The basic framework of the portal implementation comprises three layers of entities: portlets, proxies, and Web services.

Portlets

These are the entities declared in the ComergentPortal Web application **portlet.xml** configuration file. They are the named elements that you can refer to from the Portal Container (such as Pluto). Each portlet element in the **portlet.xml** configuration file declares a portlet and specifies the proxy which it uses to invoke an underlying Web service.

Proxies

These are the entities used to invoke the Web services: the **WSProxyConfigurations.xml** configuration file specifies which Web service a proxy invokes, and which InputBuilder Java class and ViewControl JSP page is to be used to submit the request to the service and to render the result.

Web Services

The Web services are not part of the ComergentPortal Web application, but are provided by the Comergent eBusiness System. The **WSProxyConfigurations.xml** configuration file specifies the location of the Web service for each proxy.

Naming Conventions

For each object such as order, invoice, promotion, and so on, we use the following naming conventions to specify the associated portlets.

TABLE 23. Portlet Naming Conventions

Portlet	Proxy	Web Service
<i>ObjectGet</i>	<i>ObjectGet</i>	<i>ObjectGet</i>
<i>ObjectList</i>	<i>ObjectList</i>	<i>ObjectSearch</i>

The *ObjectGet* portlet is used to retrieve single instances of an object, and so uses the corresponding *ObjectGet* Web service to retrieve an object identified by a unique key. The *ObjectList* portlet is used to display a list of objects: it uses the corresponding *ObjectSearch* Web service to retrieve a list of objects.

Implementation

To deploy the out-of-the-box portlets provided by the Comergent eBusiness System, follow these steps. More detailed instructions for specific Portal Containers are given in:

- "Pluto Implementation" on page 273

General Implementation Steps

1. In the Comergent eBusiness System, make sure that the Message URL for SOAP Messages system property is set correctly. Its value should be something like:

`http://debsserver:port/Comergent/msg/matrix/soap`
2. Obtain the Comergent Portal Web application WAR file: it is called something like **ComergentPortal-def-RC1.war**.
3. Deploy the Comergent Portal Web application into your portal container. We will refer to the location of the deployed Web application as ***comergent_portal_home/***.
4. Edit the ***comergent_portal_home/WEB-INF/WSProxyConfigurations.xml*** configuration file by declaring each proxy in a Proxy element. The following is a sample Proxy element that provides an order search portlet:

```
<Proxy name="OrderSearch" bindingType="SOAP">
  <ServiceDefinition>
    <URL>
      http://server:port/Comergent/dXML/5.0/OrderInterface.wsdl
    </URL>
    <Service>OrderSearch_Services</Service>
    <Operation>OrderSearchRequest</Operation>
  </ServiceDefinition>
  <InputBuilder>
    <Class>
      com.comergent.portal.data.input.OrderSearchBuilder
    </Class>
    <Parameter name="param1">value1</Parameter>
  </InputBuilder>
  <ViewControl>
    <Class>
      com.comergent.portal.data.view.PortletViewControl
    </Class>
    <Parameter name="jspFile">OrderListView.jsp</Parameter>
  </ViewControl>
</Proxy>
```

```
</Proxy>
```

The name attribute of the Proxy element is used to refer to the proxy in the ***comergent_portal_home/WEB-INF/portlet.xml*** configuration file. The ServiceDefinition element must point to the URL used to retrieve the WSDL from the Comergent eBusiness System deployment. The Service element and Operation element specify the precise Web service operation that you want the proxy to invoke.

Use the InputBuilder element to build the service request that you want to generate. Typically this class is used to marshall the beans used to make the request.

Use the ViewControl element to process the result of invoking the Web service. Typically, this is a JSP page that displays the response object in a user-friendly way.

5. Edit the ***comergent_portal_home/WEB-INF/portlet.xml*** configuration file to declare the portlets that you want to make available to the portal container. The following is a sample portlet element:

```
<portlet>
  <description>Comergent WS Proxy Portlet</description>
  <portlet-name>CmgtWSProxy_OrderList</portlet-name>
  <display-name>OrderList</display-name>
  <portlet-class>
    com.comergent.portal.portlet.WSProxyPortlet
  </portlet-class>
  <init-param>
    <name>ProxyName</name>
    <value>OrderList</value>
  </init-param>
  <expiration-cache>-1</expiration-cache>
  <supports>
    <mime-type>text/html</mime-type>
    <portlet-mode>VIEW</portlet-mode>
    <portlet-mode>EDIT</portlet-mode>
    <portlet-mode>HELP</portlet-mode>
  </supports>
  <supported-locale>en</supported-locale>
  <supported-locale>de</supported-locale>
  <portlet-info>
    <title>WS Proxy</title>
    <short-title>WS Proxy</short-title>
    <keywords>WS, Proxy</keywords>
  </portlet-info>
  <portlet-preferences>
    <preference>
      <name>dummyName</name>
```



```
<value>dummyValue</value>
<read-only>false</read-only>
</preference>
<preference>
  <name>dummyName2</name>
  <value>dummyValue2</value>
</preference>
<preference>
  <name>readonly</name>
  <value>readonly</value>
  <read-only>true</read-only>
</preference>
<preferences-validator>
  org.apache.pluto.core.impl.PreferencesValidatorImpl
</preferences-validator>
</portlet-preferences>
<security-role-ref>
  <role-name>plutoTestRole</role-name>
  <role-link>tomcat</role-link>
</security-role-ref>
</portlet>
```

It uses the mandatory `ProxyName` `init-param` element to specify which proxy it uses. The value of this parameter must be the same as the name attribute of a proxy declared in the **WSProxyConfigurations.xml** configuration file.

6. Configure the portlet container so that it can access the portlets provided the Comergent Portal Web application.
7. Restart the portlet container.

If you now access the portlet container through your browser, then you should see that the Comergent eBusiness System portlets are now available to portlet container users.

Pluto Implementation

There is an open source portal container implementation of the portlet specification called Pluto. This section describes in more detail the specific implementation steps that need to be performed to have the Comergent Portal Web application work within a Pluto installation.

1. Install Pluto into your portal server machine. The installation directory will be referred to as *pluto_home*.

2. Follow the instructions to set up Pluto to run against the JDK 1.4.2. Typically this involves installing the compatibility JAR files: check the Tomcat documentation for further details.
3. Start up Pluto. Check that the port numbers that the Pluto implementation uses do not conflict with other port numbers used by other servlet containers or Web servers on the portal server machine.
4. Point your browser to `http://server:port` to verify that the Pluto server is up and running.
5. Point your browser to `http://server:port/pluto/portal`. This is the administration page for Pluto. You should see two links on the left: **Test** and **Admin**.
6. Deploy the Comergent Portal Web application to Pluto. You can do this most easily by simply copying the WAR file to the *pluto_home/webapps/* directory. Pluto should auto-detect the WAR file and deploy it, but if not, then stop and restart Pluto. These instruction pre-suppose that you rename the WAR file to **Comergent.war**, so that the resulting Web application can be referred to as Comergent.
7. Remove the following file from the *pluto_home/webapps/Comergent/WEB-INF/lib/* directory:
 - **portlet-api-1.0.jar**
8. Edit the **portletentityregistry.xml** configuration file in the *pluto_home/webapps/pluto/WEB-INF/data/* directory. You need to declare the new application and its portlets by adding an application element along these lines:

```
<application id="6">
  <definition-id>Comergent</definition-id>
  <portlet id="60">
    <definition-id>
      Comergent.CmgtWSProxy_OrderGet
    </definition-id>
  </portlet>
  <portlet id="61">
    <definition-id>
      Comergent.CmgtWSProxy_OrderList
    </definition-id>
  </portlet>
</application>
```

The definition-ids for the application and portlets will be used to uniquely identify the portlets so take care to use unique ids for these. In particular:

- a. The definition-id element value of the application must be the name of the Web application defined in the **portletcontexts.txt** configuration file described in Step 9 below.
 - b. The value of each definition-id element must match a portlet-name element declared in the **portlet.xml configuration file** described in Step 12 below.
9. Edit the **portletcontexts.txt** configuration file in the *pluto_home/webapps/pluto/WEB-INF/data/* directory. You must add the Comergerent context by adding a new line:

```
/Comergerent
```

You can declare a different Web application context name, if you have renamed the ComergerentPortal Web application before deploying it to the Pluot servlet container.

10. Edit the **pageregistry.xml** configuration file in the *pluto_home/webapps/pluto/WEB-INF/data/* directory. You must add an element along these lines:

```
<fragment name="Comergerent" type="page">
  <navigation>
    <title>Comergerent</title>
    <description>Used for deploying portlets to Pluto
  </description>
</navigation>
  <fragment name="row" type="row">
    <fragment name="col1" type="column">
      <fragment name="c1" type="portlet">
        <property name="portlet" value="6.60"/>
      </fragment>
    <fragment name="c2" type="portlet">
      <property name="portlet" value="6.61"/>
    </fragment>
  </fragment>
</fragment>
</fragment>
```

This file declares how the portlets will be presented to the users as they access the portal container. The name attribute of the top-level fragment must correspond to the named context you declared in Step 9 above. Note that the value attribute of the property elements identify the unique portlet definitions declared in Step 8.

This complete the configuration of the Pluto portal application. Now you must configure the Comergerent Portal Web application.

11. In the deployed Comergent Portal Web application, edit the **web.xml** configuration file in the *pluto_home/webapps/Comergent/WEB-INF/* directory. You must add an element for each portlet along these lines:

```
<servlet>
  <servlet-name>CmgtWSProxy_OrderList</servlet-name>
  <display-name>CmgtWSProxy_OrderList Wrapper</display-name>
  <description>Automated generated Portlet Wrapper</description>
  <servlet-class>
    org.apache.pluto.core.PortletServlet
  </servlet-class>
  <init-param>
    <param-name>portlet-guid</param-name>
    <param-value>
      Comergent.CmgtWSProxy_OrderList
    </param-value>
  </init-param>
  <init-param>
    <param-name>portlet-class</param-name>
    <param-value>
      com.comergent.portal.portlet.WSProxyPortlet
    </param-value>
  </init-param>
  <security-role-ref>
    <role-name>plutoTestRole</role-name>
    <role-link>tomcat</role-link>
  </security-role-ref>
</servlet>
```

In the servlet element, make sure that the value of the portlet-guid init-param is in the form *application.portlet*, where the application is the name of the Web application and the portlet is the name of the target portlet. It must match the value of a portlet-name element in the **portlet.xml** configuration file described in Step 12 below.

The corresponding servlet mapping element should be used to map URLs to the named servlet. For simplicity, keep the servlet-name and url-mapping values as indicated. This completes the mapping from a URL to the target portlet.

```
<servlet-mapping>
  <servlet-name>CmgtWSProxy_OrderList</servlet-name>
  <url-pattern>/CmgtWSProxy_OrderList/*</url-pattern>
</servlet-mapping>
```

12. Edit the **portlet.xml** configuration file in the *pluto_home/webapps/Comergent/WEB-INF/* directory. Make sure that each portlet is declared in an element along these lines:

```
<portlet>
```

```
<description>Comergent WS Proxy Portlet</description>
<portlet-name>CmgtWSProxy_OrderList</portlet-name>
<display-name>OrderSearch</display-name>
<portlet-class>
    com.comergent.portal.portlet.WSProxyPortlet
</portlet-class>
<init-param>
    <name>ProxyName</name>
    <value>OrderList</value>
</init-param>
<init-param>
    <name>InvokeOnLoad</name>
    <value>>false</value>
</init-param>
<expiration-cache>-1</expiration-cache>
<supports>
    <mime-type>text/html</mime-type>
    <portlet-mode>VIEW</portlet-mode>
    <portlet-mode>EDIT</portlet-mode>
    <portlet-mode>HELP</portlet-mode>
</supports>
<supported-locale>en</supported-locale>
<supported-locale>de</supported-locale>
<portlet-info>
    <title>WS Proxy</title>
    <short-title>WS Proxy</short-title>
    <keywords>WS, Proxy</keywords>
</portlet-info>
<portlet-preferences>
    <preference>
        <name>dummyName</name>
        <value>dummyValue</value>
        <read-only>>false</read-only>
    </preference>
    <preference>
        <name>dummyName2</name>
        <value>dummyValue2</value>
    </preference>
    <preference>
        <name>readonly</name>
        <value>readonly</value>
        <read-only>>true</read-only>
    </preference>
<preferences-validator>
    org.apache.pluto.core.impl.PreferencesValidatorImpl
</preferences-validator>
</portlet-preferences>
<security-role-ref>
    <role-name>plutoTestRole</role-name>
```

```
        <role-link>tomcat</role-link>
    </security-role-ref>
</portlet>
```

The `portlet-name` element value must correspond to the second part of the `definition-id` element in the **portletentityregistry.xml** configuration file defined in Step 8 above and the `portlet-guid` `init-param` in the **web.xml** file defined in Step 11 above.

Each portlet element must have an `init-param` element like this:

```
<init-param>
    <name>ProxyName</name>
    <value>OrderList</value>
</init-param>
```

This element specifies the proxy that is used by the portlet to access the Web service. Its value must be the same as the corresponding name attribute of a Proxy element defined in the **WSProxyConfigurations.xml** configuration file in Step 13 below.

13. Edit the **WSProxyConfigurations.xml** configuration file in the *pluto_home/webapps/Comergent/WEB-INF/* directory.

```
<WSProxyConfigurations>
    <Proxy name="OrderList" bindingType="SOAP">
        <ServiceDefinition>
            <URL>
                http://debssserver:port/Comergent/dXML/5.0/OrderInterface.wsdl
            </URL>
            <Service>OrderSearchService</Service>
            <Operation>OrderSearchRequest</Operation>
            <PortType>OrderSearchPortType</PortType>
        </ServiceDefinition>
        <InputBuilder>
            <Class>
                com.comergent.portal.data.input.OrderSearchBuilder
            </Class>
            <Parameter name="param1">value1</Parameter>
        </InputBuilder>
        <ViewControl>
            <Class>
                com.comergent.portal.data.view.PortletViewControl
            </Class>
            <Parameter name="jspFile">OrderListView.jsp</Parameter>
        </ViewControl>
    </Proxy>
    <Proxy name="OrderGet" bindingType="SOAP">
        <ServiceDefinition>
            <URL>
                http://debssserver:port/Comergent/dXML/5.0/OrderInterface.wsdl
```

```
</URL>
<Service>OrderGetService</Service>
<Operation>OrderGet</Operation>
<PortType>OrderGetPortType</PortType>
</ServiceDefinition>
<InputBuilder>
  <Class>
    com.comergent.portal.data.input.OrderGetBuilder
  </Class>
  <Parameter name="param1">value1</Parameter>
</InputBuilder>
<ViewControl>
  <Class>
    com.comergent.portal.data.view.PortletViewControl
  </Class>
  <Parameter name="jspFile">OrderGetView.jsp</Parameter>
</ViewControl>
</Proxy>
</WSProxyConfigurations>
```

The name attribute of each Proxy element must match the ProxyName init-param element of a portlet defined in Step 12 above. To begin with the most important element to change is the URL used to access the WSDL for the Web service. This must point to the WSDL URL provided by the Comergent eBusiness System. The default value for these is used in the example above.

Each Proxy configuration encapsulates the necessary parameters for invoking a remote Web service. It contains the following elements:

- ServiceDefinition element: mandatory configuration fragment that contains the details of the Web service to invoke. It includes the WSDL URL, the service to use, and the operation of that service to invoke.
- InputBuilder element: The marshalling logic implementation handler for wrapping any request parameters. Optionally, you can specify parameters that provide additional data to the InputBuilder. You can also use fully-qualified names as the names of parameters. For example:

```
<Parameter name="MessageHeader.UserLogin">ajones</Parameter>
```

This means that the InputBuilder class sets the value of the MessageHeader.UserLogin parameter to “ajones”.

- ViewControl element: The presentation control implementation handler that generates the necessary presentation fragments.

- The Proxy name attribute serves as the handle on a specific proxy and should be unique. As part of any navigation in presentation, any action URL should map to a valid proxy name.

For example, in the JSP page presenting the portlet, make sure that the value of the action attribute corresponds to the proxy name attribute:

```
<portlet:actionURL
    secure='<%=renderRequest.isSecure()? "True": "False"%>'
    var="orderURL">
    <portlet:param name="orderNumber" value='<%= orderNumber%>' />
    <portlet:param name="action" value="OrderGet" />
</portlet:actionURL>
```

In the above example, action=OrderGet maps to the proxy OrderGet fragment.

14. Restart the Pluto portal server.
15. Point your browser to <http://server:port/pluto/portal>. This is the administration page for Pluto. You should see three links on the left: **Test**, **Admin**, and **Comergent**.
16. Click on the **Comergent** link: you should now see the portlets that you have defined.

C3 MarketLink enables users of external systems such as Ariba Buyer or Commerce One to “punch in” to the Comergent eBusiness System. This chapter covers:

- C3 MarketLink for Ariba Buyer
- C3 MarketLink for Commerce One

C3 MarketLink for Ariba Buyer

Overview

Using **C3 MarketLink**, Release 7.0.2 of the Comergent eBusiness System supports the ability for users of Ariba Buyer systems to punch out from their Buyer session and punch into your implementation of the Comergent eBusiness System. While users are punched into the Comergent eBusiness System they can select products, navigate through the product category hierarchy, search the product catalog, conduct a guided selling session, configure complex products, and obtain prices before returning to their Buyer session.

Companies that have installed Ariba Buyer use it to enable their procurement agents to buy products from external partners through their browser. The Ariba Commerce Services Network (ACSN) is set up to enable buyers and suppliers to communicate seamlessly through a common network. Each buying partner and

supplier is set up on the ACSN with a profile that includes an Ariba Network ID (ANID) and a password. Suppliers can set up PunchOut and PurchaseOrder URLs as part of their profile.

When a procurement user starts work in an Ariba Buyer session, they are authenticated when they log in. They can browse product catalogs provided in the form of cXML documents by their suppliers and select items from one or more catalogs to purchase. A procurement user can “punch out” from their Ariba session and, through the ACSN, “punch in” to a Comergent eBusiness System set up to support this functionality.

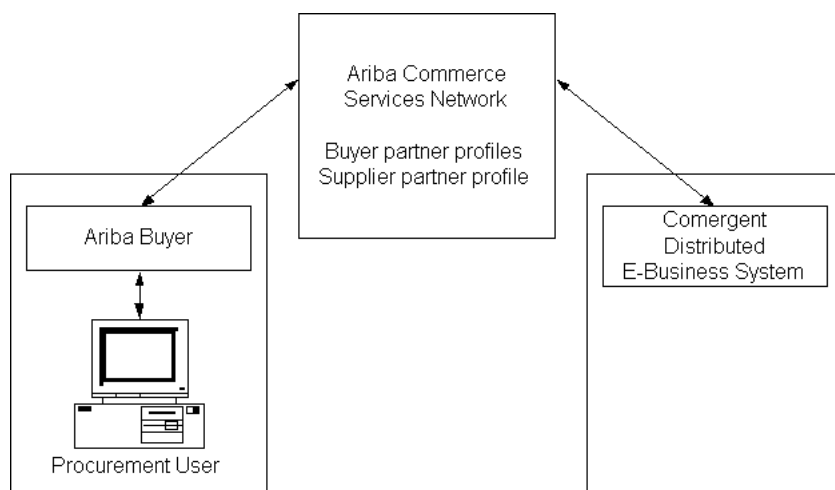


FIGURE 17. Ariba Commerce Services Network

The ACSN uses the partner profiles to provide authentication information and to identify the URLs to use to punch in to the Comergent eBusiness System.

Setting Up

To set up this functionality, follow these steps:

1. Set up a profile for your organization at the ACSN. The ACSN provides the following:
 - a. The ANID for your organization.
 - b. The password for your ANID.
2. Set up the configuration parameters in **web.xml**:

- a. In **web.xml**, set up the punchin URL: this is the standard XML message URL. By default, it is “msg/matrix”, but you will almost certainly have changed this as part of your modification of the **web.xml** file described in CHAPTER 8, “Customizing your Comergent eBusiness System”.
3. Set the values of the General elements of the **Comergent.xml** configuration file as follows:
 - a. The value of the UserAgent element must be “DEBS”.
4. Set the values of the MarketLink elements of the **BusinessRule.xml** configuration file as follows:
 - a. The value of the AribaIdentity element must be your organization’s ANID provided by Ariba.
5. In your ACSN profile, set the PunchOut and PurchaseOrder URLs. These must be the same, and depend on the values you set up in Step 2a.
6. In your Comergent eBusiness System, set up a partner profile and partner user for each of your partners who will be punching in from their Ariba Buyer system.
 - a. Each partner must have their own partner profile in the Comergent eBusiness System. Make sure that you create the partner profile as a Direct Commerce-enabled partner. If the partner has an existing Direct Commerce-enabled profile already, then you do not have to create a new one.
 - b. Create a partner user for this partner: their username must be the ANID for the *partner* and their password must be *your* ANID password.
 - c. Assign the ProcurementUser role to this user.
 - d. Create a price list that provides the list of products and prices that you want to make available to this partner through the Ariba Buyer. You can use an existing price list if one meets your needs. However, make sure that the currency of the price list is compatible with the Ariba Buyer system at the partner site. See the *Comergent eBusiness System Administration Guide* for more information about setting up price lists.
7. For each partner, export your product catalog to them:
 - a. Create a Catalog Export Set for the partner: take care that you use the price list assigned to the partner in Step 6d, and that you specify the export format to be cXML 1.1. See the *Comergent eBusiness System Administration Guide* for further information. Note that the AribaIdentity

- element set in Step Step 4 is used to identify your organization in the generated cXML document.
- b. You must produce the product catalog extract as a cXML document, and send it to the partner. You can produce the extract as a one-off task or schedule it so that the catalog information is extracted at regular intervals. See the *Comergent eBusiness System Administration Guide* for more information.
 - c. The partner must incorporate the product catalog extract into their installation of Ariba Buyer.
8. Test the system. In particular, make sure that when a user is logged in to the Comergent eBusiness System as a procurement user they see the buttons that enable them to return to their Ariba Buyer session rather than the buttons that enable a user to place a product inquiry list as an order.

C3 MarketLink for Commerce One

Overview

Using **C3 MarketLink**, Release 7.0.2 of the Comergent eBusiness System supports the ability of users of Commerce One Enterprise Buyer systems to punch out from their Enterprise Buyer session and punch into your implementation of the Comergent eBusiness System. While users are punched into the Comergent eBusiness System they can select products, navigate through the product category hierarchy, search the product catalog, conduct a guided selling session, configure complex products, and obtain prices before returning to their Enterprise Buyer session.

Companies that have installed Enterprise Buyer use it to enable their procurement agents to buy products from external partners through their browser. The Commerce One MarketSite is set up to enable buyers and suppliers to communicate through a common network seamlessly. Each buying partner and supplier is set up on the MarketSite with a profile that includes a supplier ID. Suppliers can set up PunchIn URLs as part of their profile.

When a procurement user starts work in an Enterprise Buyer session, they are authenticated when they log in. They can browse a list of suppliers and by clicking on the link associated with a supplier, be directed to the supplier's Web site. In particular, if a procurement user wants to, they can "punch out" from their Enterprise Buyer session and, through MarketSite, "punch in" to a Comergent eBusiness System which has been set up to support this functionality.

Communication between the Enterprise Buyer and the Comergent eBusiness System uses xCBL 3.0. Make sure that your installations of Enterprise Buyer and MarketSite use this version of xCBL.

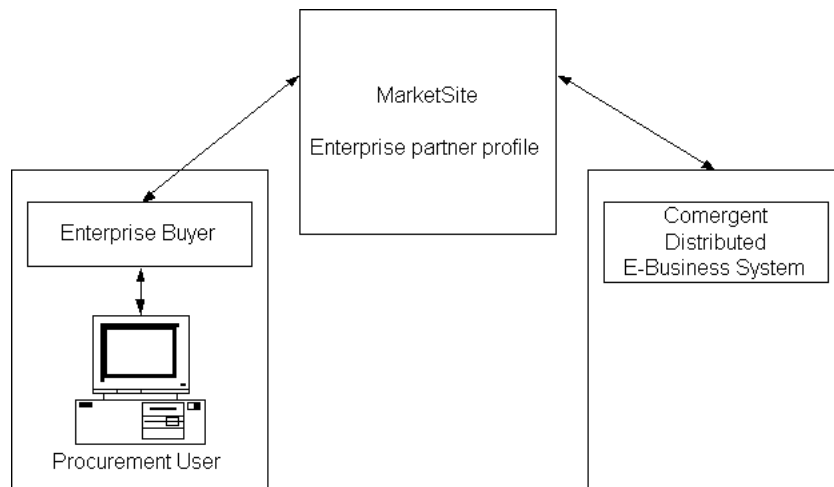


FIGURE 18. Enterprise Buyer to Comergent eBusiness System Integration

Setting Up

To set up this functionality, follow these steps:

1. In your Comergent eBusiness System, create a partner profile for the partner who will be using Enterprise Buyer to punch in.
2. Create a partner user for this partner. You must assign them the MarketProcurementUser role.
3. Create appropriate price lists for the partner and assign them to the partner.
4. Establish a Supplier profile for the enterprise on the MarketSite installation used by the partner. The Supplier profile must include:
 - the URL to be used to punch in to the Comergent eBusiness System. It must be of the form:

```
http://<debsserver>:<port>/Comergent/debs/matrix?  
Username=username&Password=password
```

where the username and password values are for the user created in Step 2.

- The MarketSite Trading Partner ID (TPID).
5. In your Comergent eBusiness System, **BusinessRule.xml** configuration file, set the CommerceOneIdentity element value to the TPID.

This chapter presents an overview of how the Comergent eBusiness System manages to support different external message families such as dXML, RosettaNet, and cXML. Readers of this chapter should be familiar with Java, XML, XSLT, and the message families used by their implementations of the Comergent eBusiness System.

Overview

When the Comergent eBusiness System receives a request that is posted in the form of an XML message, it must process the request appropriately. It does this by converting the message into an internal XML message that conforms to the Comergent XML standard, and then processes the message using the message type to determine which controller, BLC, and JSP pages are used.

For example, if an inbound XML message is a dXML PriceAvailabilityRequest, then prior to passing the message to be processed by a controller, then the Comergent eBusiness System converts the message to a Comergent XML PriceAvailabilityRequest.

Conversely, when the Comergent eBusiness System posts a message such as a price and availability request to an external system, it must compose the message in the format recognized by the external system. If the external system requires RosettaNet, then the Comergent eBusiness System must convert the internal

representation of the message in Comergent XML to an XML document that conforms to the appropriate RosettaNet DTD.

The Comergent eBusiness System uses the XSLT (XSL Transformation) technology to perform the conversion. To do so, it invokes a number of classes described in "Inbound Message Processing" on page 292.

Message Families

The Comergent eBusiness System uses the following terminology:

- **Message family:** a family of messages is typically used to define a standard such as RosettaNet, Commerce One's xCBL, Ariba's cXML, or Comergent Technologies' dXML.
- **Message version:** each family can support more than one version: this is the set of message types that comprise a particular release of the message family: the current dXML version is 3.0.
- **Message category:** a specific message family and message version together define a set of messages: this is referred to as the message category. It must be possible to list all of the message types supported in particular message category.
- **Message type:** each message has a message type. Typically, it expresses the purpose of the message such as PriceAvailabilityGet or OrderCancelRequest.

Supported Conversions

Currently, the Comergent eBusiness System supports the following conversions between message types:

TABLE 24. Supported Message Type Conversions

To						
From	Comergent 1.0	Comergent 2.0	cXML	dXML 4.1.1	RosettaNet	xCBL
Comergent 1.0						
Comergent 2.0				X		
cXML				X		
dXML 4.1.1	X	X	X	X	X	X

TABLE 24. Supported Message Type Conversions (Continued)

To From	Comergent 1.0	Comergent 2.0	eXML	dXML 4.1.1	RosettaNet	xCBL
RosettaNet				X		
xCBL				X		

To implement a new conversion standard, see "Implementing a New Mapping" on page 289.

Implementing a New Mapping

Suppose that you must support a new messaging standard called MSML. You will communicate with a partner whose partner server is set up to receive MSML messages and it will return MSML messages in response that you must process.

For each MSML message type that you want to create or process, you must map its content to a corresponding Comergent XML 3.0 message type. For example, suppose that you must send a MSML PriceAvailabilityGet message out to the partner server, and must process the returned MSML PriceAvailabilityPut message.

You must do the following:

1. Create a new MessageCracker class for the MSML message family. You can extend the abstract class, AbstractMessageCracker. Overwrite the *getMessageFamily()*, *getMessageVersion()*, *getMessageCategory()* and *getMessageType()* methods with methods appropriate to the MSML message family.
2. Create a new entry in the **MessageCrackerMap.xml** file for this new message family. It should be of the form:

```
<URLExt Name="msml">
  <ContentType Name="text/msml">
    <MessageCrackerImpl>
      com.comergent.dcm.messaging.MSMLMessageCracker
    </MessageCrackerImpl>
    <ControllerImpl>
      com.comergent.dcm.messaging.MessagingController
    </ControllerImpl>
    <Request>
      com.comergent.dcm.messaging.XMLRequest
```

```
</Request>
<Response>
  com.comergent.dcm.messaging.XMLResponse
</Response>
</ContentType>
</URLExt>
```

The value of the URLExt Name attribute is used so that this element is used if an inbound message is posted to a URL that looks like this:

`http://server:port/Comergent/msg/matrix/msml`

Note that you may not need to declare a separate URLExt element if the content type of the MSML message is set to be unique amongst the content types processed by the Comergent eBusiness System.

3. In the *debs_home/Comergent/WEB-INF/converters/ConverterMap.xml* file, add the following element to the OutboundConverters element:

```
<Converter>
  <MessageCategory>Comergent_3.0</MessageCategory>
  <MessageMap>
    WEB-INF/converters/Comergent_3_0_to_MSML.xml
  </MessageMap>
  <ConvertedMessageCategory>
    MSML
  </ConvertedMessageCategory>
</Converter>
```

4. In the *debs_home/Comergent/WEB-INF/converters/ConverterMap.xml* file, add the following element to the InboundConverters element:

```
<Converter>
  <MessageCategory>MSML</MessageCategory>
  <MessageMap>
    WEB-INF/converters/MSML_to_Comergent_3_0.xml
  </MessageMap>
  <ConvertedMessageCategory>
    Comergent_3.0
  </ConvertedMessageCategory>
</Converter>
```

5. Create two files: **Comergent_3_0_to_MSML.xml** and **MSML_to_Comergent_3_0.xml**. These files follow this format:

```
<?xml version="1.0" encoding="UTF-8"?>
<MessageMap>
  <MessageCategory>Comergent_3.0</MessageCategory>
  <ConvertedMessageCategory>MSML</ConvertedMessageCategory>
  <AllowNullConversion>0</AllowNullConversion>
  <MessageType Name="PriceAvailabilityRequest">
    <ConvertedMessageType>
```

```
        PriceAvailabilityGet
    </ConvertedMessageType>
    <ConverterImpl>
        com.comergent.dcm.msgconverter.ConverterImpl
    </ConverterImpl>
    <Stylesheet>
        WEB-INF/stylesheets/cmgt30tomsgml_pa_req.xsl
    </Stylesheet>
</MessageType>
</MessageMap>
```

and

```
<?xml version="1.0" encoding="UTF-8"?>
<MessageMap>
    <MessageCategory>MSML</MessageCategory>
    <ConvertedMessageCategory>
        Comergerent_3.0
    </ConvertedMessageCategory>
    <AllowNullConversion>1</AllowNullConversion>
    <MessageType Name="PriceAvailabilityPut">
        <ConvertedMessageType>
            PriceAvailabilityReply
        </ConvertedMessageType>
        <ConverterImpl>
            com.comergent.dcm.msgconverter.ConverterImpl
        </ConverterImpl>
        <Stylesheet>
            WEB-INF/stylesheets/msmltocmgt30_pa_rep.xsl
        </Stylesheet>
    </MessageType>
</MessageMap>
```

Here we assume that the existing Converter class, ConverterImpl, will suffice to perform the conversion.

The AllowNullConversion element is used to specify whether a message can be passed through untransformed if there is no MessageType listed for a particular message.

- “0” means that messages are not passed through if there is no MessageType element corresponding to the message type of a particular message.
- “1” means that a message may be passed through untransformed if its MessageType is not included in this file.

The default value for this element is “1”.

6. Create XSLT mapping files, **cmgt30tomsm1_pa_req.xml** and **msm1tocmgt30_pa_rep.xml**, that map elements to elements along these lines:

```
<xsl:template match="PriceAvailability">
  <OrderType>
    <xsl:value-of select="/Comergent/PriceAvailability/OrderType"/>
  </OrderType>
  <CurrencyCode>
    <xsl:value-of select="/Comergent/PriceAvailability/CurrencyCode"/>
  </CurrencyCode>
  <SellerKey>
    <xsl:value-of select="/Comergent/PriceAvailability/SellerKey"/>
  </SellerKey>
  <SellerName>
    <xsl:value-of select="/Comergent/PriceAvailability/SellerName"/>
  </SellerName>
  <SellerLocation>
    <xsl:value-of select="/Comergent/PriceAvailability/SellerLocation"/>
  </SellerLocation>
  <StatusCode>
    <xsl:value-of select="/Comergent/PriceAvailability/StatusCode"/>
  </StatusCode>
  <StatusMessage>
    <xsl:value-of select="/Comergent/PriceAvailability/StatusMessage"/>
  </StatusMessage>
  <InResponseToID>
    <xsl:value-of select="/Comergent/PriceAvailability/InResponseToID"/>
  </InResponseToID>
</xsl:template>
```

You create the exact mapping of element to element by examining the two DTDs to identify corresponding elements.

Inbound Message Processing

This section provides a brief description of the processing of an inbound message as it is received by the Comergent eBusiness System.

1. Typically, messages posted to the Comergent eBusiness System are sent using a URL that is mapped to the MessagingServlet.

For example, suppose that you want the Messaging Servlet to process requests sent to `http://<server>:<port>/Comergent/msg/matrix`. Set the following lines in the **web.xml** file:

```
<servlet>
  <servlet-name>MessagingServlet</servlet-name>
  <servlet-class>
    com.comergent.dcm.messaging.MessagingServlet
```

```
</servlet-class>
<init-param>
  <param-name>browserCache</param-name>
  <param-value>true</param-value>
  <description>
    This can disable client-side caching of pages
  </description>
</init-param>
</servlet>
```

and

```
<servlet-mapping>
  <servlet-name>MessagingServlet</servlet-name>
  <url-pattern>/msg/matrix/*</url-pattern>
</servlet-mapping>
```

2. The `MessagingServlet` class is a sub-class of the `DispatchServlet` class. It overrides the `createController()`, `createRequest()`, and `createResponse()` methods. The `MessagingServlet` first creates `ComergentRequest` and `ComergentResponse` objects to wrap the request and response objects received from the servlet container. To do so, it uses a `MessageCrackerEntry` and a `MessageCracker` to read the inbound message and identify its message family, message version, and message type.

Both the `MessageCrackerEntry` and `MessageCracker` are created by the `MessageCrackerFactory`. This class inspects the URL and content type of the request to determine which `MessageCrackerEntry` and `MessageCracker` must be created. The `MessageCrackerFactory` class uses the **MessageCrackerMap.xml** file to map each specific combination of URL extension and content type to target request types and response types. It also specifies which controller should first be used to process the request.

A typical entry in **MessageCrackerMap.xml** looks like this:

```
<URLExt Name="">
  <ContentType Name="application/x-icc-xml">
    <MessageCrackerImpl>
      com.comergent.dcm.messaging.ComergentMessageCracker
    </MessageCrackerImpl>
    <ControllerImpl>
      com.comergent.dcm.core.MessagingController
    </ControllerImpl>
    <Request>com.comergent.dcm.messaging.XMLRequest</Request>
    <Response>com.comergent.dcm.messaging.XMLResponse</Response>
  </ContentType>
</URLExt>
```

In this example, any request whose content type is “application/x-icc-xml” is cracked using the `ComergentMessageCracker` and the classes used for the controller, request, and response are `MessagingController`, `XMLRequest`, and `XMLResponse` respectively.

Note that the `XMLRequest` and `XMLResponse` classes provide a `XMLRequestAccessor` and `XMLResponseGenerator` class respectively. These classes provide convenience methods to get and set data elements.

3. Once the appropriate controller and `ComergentRequest` and `ComergentResponse` classes are created, the `execute()` method of the `DispatchServlet` is invoked and the processing of the request proceeds using the standard architecture of the Comergent eBusiness System.

Generating an Outbound Message

This section describes what happens when a Comergent eBusiness System application sends a message to an external system. See “Sending XML Messages to an External System” on page 333 for a more detailed example.

1. The application invokes the `restore()` method on a business object such as a shopping cart transfer request whose recipe defines its datasource as “MESSAGE”.
2. The `MsgService` element of the **DataServices.xml** file determines which class is used to restore the business object: by default it is `com.comergent.dcm.dataservices.MsgService`. The `DataManager` calls this class.
3. The `DataManager` identifies the URL to which the message should be posted. Typically, this is a URL specific to the intended partner recipient. In addition, the `DataManager` identifies the message category to use to send the message.
4. The `OutboundConverters` section of the **ConverterMap.xml** file determines which `MessageMap` file is to be used to perform the conversion from the internal Comergent format (Comergent 3.0) to the required external format.
5. The `MessageMap` file determines the following:
 - The outbound message type
 - The class used to perform the conversion
 - The XSL stylesheet to be used to perform the conversion

6. The `MsgService` class invokes the conversion class to generate the XML message and posts it to the specified URL.

Extrinsic Elements

In Release 7.0.2, you can use Extrinsic elements to extend the message definitions for both inbound and outbound messages that conform to the dXML 4.1 message family. Each Extrinsic element that you add to a message provides a name-value pair: this can be used to provide additional information in the message.

Each Extrinsic element must conform to the **Extrinsic.dtd** DTD whose basic form is:

```
<!ELEMENT Extrinsic (#PCDATA)>
<!ATTLIST Extrinsic
    name CDATA #REQUIRED
>
```

An example of using Extrinsic elements is provided in the handling of catalog exports. See the *Comergent eBusiness System Developer Guide* for more information.

Inbound Processing

When an inbound dXML message is received, it is transformed into a Comergent XML document. If the inbound message contains an Extrinsic element, then it is turned into an element whose name is the Name attribute of the Extrinsic element and whose value is the value of the Extrinsic element. For example:

```
<Extrinsic Name="PackingUnit">Crate</Extrinsic>
```

is transformed into:

```
<PackingUnit>Crate</PackingUnit>
```

Outbound Processing

You can mark a field of a data object as Extrinsic by invoking the `setExtrinsic(true)` method of the `MetaData` class. When the data object is turned into a dXML message, the corresponding field is declared as an Extrinsic element. For example, suppose that there is a `PackingUnit` field of the `Product` data object., then the following code would result in the value of the `PackingUnit` element being declared as an Extrinsic element:

```
m_productBean.setPackingUnit("Crate");
MetaData temp_MetaData = m_productBean.getMetaData("PackingUnit");
temp_MetaData.setExtrinsic(true);
```

If the product data bean is used to generate a dXML message, then the resulting dXML message will include:

```
<Extrinsic Name="PackingUnit">Crate</Extrinsic>
```


Implementing Order Management Integration

This chapter describes the steps required to integrate the Comergent eBusiness System order management system with an ERP system.

Simple ERP Integration

When users place orders in the Comergent eBusiness System, you may want to immediately send these orders to an ERP system or some other external system so that they can be processed. The Comergent eBusiness System can be configured so that orders are HTTP posted to a specified URL as XML messages. The receiving HTTP server can process the messages as appropriate. For example:

- The receiving HTTP server could be an instance of the Comergent Technologies **C3** Message Broker server. The **C3** Message Broker provides a powerful and flexible message-based processor that can transform and dispatch XML documents using a variety of protocols, including XSLT and EDI.
- The receiving HTTP server could be an instance of the Sun Microsystems eGate server which provides integration with its ICAN suite of application network products.

The setup steps to set up the integration with an external HTTP server are:

1. Log in to the Comergent eBusiness System as an enterprise administrator.

2. Using the Profile Manager, create a partner to represent the ERP system. Make a note of its partner key. Set its message URL to the URL used to post the XML messages from the Comergent eBusiness System to the ERP system. and set the XML Message Version to “Comergent 4.0”.
3. Using the System Administration pages, set the C3 Integrator **ERPIntegrationUrl** system administration property to the partner key of the partner created in Step 2.
4. Using the System Administration pages, set the C3 Orders **Send Orders XML msgs to ERP** system administration property to “true”.
5. Set the C3 Orders **DEBSAdminForERP_User** and **DEBSAdminForERP_Password** properties to the username and password of an enterprise administrator. These values are used to initiate the cron job that checks for unsent orders and is used to authenticate the messages to the ERP system.

As direct commerce users place orders, their orders should be posted to the ERP system URL in the form of an **ERPCreateOrderRequest** message.

- If the message is successfully posted, then the integration status of the order is set to “Y”, but the order status field is left at Order Submitted until the ERP system responds to accept (or reject) the order.
 - If for any reason, the message is not successfully posted, then the integration status of the order is set to “N”.
6. A cron job can be set up to regularly check for orders that have not yet been successfully posted to the ERP system, and to re-try posting them. The cron job class should be set to “com.comergent.apps.orderMgmt.orders.bizAPI.OrdersERPCron”. This class is provided as part of the Comergent eBusiness System. The cron job should be set up as a system cron job.

As your customers create and place orders on your Comergent eBusiness System, the state of each order is managed by the **C3** Orders application. This chapter describes how the state of an order and its order lines change in response to activities initiated by the customer, customer service representatives, and external systems.

In addition, returns are also managed using states to track return requests as they are processed. Customers may request to return items once they have received them and customer service representatives may also initiate return requests in response to customer requests. Requests to return items must be accepted by an external system before a customer can actually return the item.

Overview

Order States

An order starts in the “Open” state when it is created. Orders complete their movement through the system when either all of the order line items have shipped (the “Shipped” state) or when the order has been cancelled (the “Cancelled” state). All of the transitions to these states and other intermediate states are determined by the actions of users or by messages received from external systems.

Order states primarily reflect an aggregation of the states of the order lines that make up the order. For example, an order is in the “In process” state if all of its order lines have state “In process”. If an order line is added, then the order line is in the “Order submitted” and the order state reverts to “Order submitted” until the new order line state changes to “In process”. Similarly, when one or more order lines are in the “Partially shipped” state, the whole order is in the “Partially shipped” state. Only when all the order lines are in the “Shipped” state does the order move to this state.

For our reference implementation of the Comergent eBusiness System, the state transition diagram is presented in Figure 19 on page 304. For example:

- If the order is in the “In process” state and the customer who created the order submits a request to cancel the order, then the state of the order is changed to “Cancel submitted”.
- If the order is in the “Partially shipped” state and the external system sends a ShipmentUpdate message, and if the order shipment is completed, then the state is updated to “Shipped”.

In general, only certain actions may be performed on an order when an order is in a particular state. For example, once a customer has created and submitted an order, the order is in the “Order submitted” state. Until the ERP system has responded with a StatusUpdate message to accept the order, the customer may not change their order. When the StatusUpdate message is received and processed, then the order state is changed to “In process”.

Order Line States

Each order has header information (such address and billing information) and one or more order lines. Each order line has a product ID, a quantity, shipping information, and an order line state. In general, possible order line states are a subset of the possible order states. As for orders, order lines may transition from one state to another in response to customer activity, actions by a customer service representatives, or in response to messages from an external system. For example:

- If the order line is in the “In process” state and the customer who created the order submits a request to delete the order line, then the state of the order is changed to “Cancel submitted”.
- If the order line is in the “Partially shipped” state and the external system sends a ShipmentUpdate message, and if the order line shipment is completed, then the state is updated to “Shipped”.

In general, only certain actions may be performed on an order line when an order line is in a particular state. For example, once a customer has created and submitted an order, the order line is in the “Order submitted” state. Until the ERP system has responded with a StatusUpdate message to accept the order and the particular order line, the customer may not change their order line. When the StatusUpdate message is received and processed, then the order line state is changed to “In process”.

Return States

Each return request has header information (such address and billing information) and one or more return lines. Each return line has a product ID, a quantity, shipping information. Each return has a state, but individual return lines do not. Like order states, return states are maintained in the CMGT_LOOKUPS table.

As for orders, returns may transition from one state to another in response to customer activity, actions by a customer service representatives, or in response to messages from an external system. For example:

- If the return is in the “Open” state and the returns rules engine rejects the return request, then the state of the return is changed to “Denied by RulesEngine”.
- If the return is in the “Submitted to ERP” state and the external system sends a StatusUpdate message to accept the return, then the state is updated to “Approved by ERP”.

In general, only certain actions may be performed on a return when a return is in a particular state. For example, once a customer has created and submitted a return request, the return may be automatically processed by a return rules engine or it may be manually processed by a customer service representative.

Order Process Modeler

Release 6.4 introduces the Order Process Modeler: this is a mechanism to manage the business logic of the order management cycle. The Order Process Modeler manages the state transitions of an order as it proceeds through the stages after it has been placed by a user.

The Order Process Modeler makes use of the state machine architecture introduced in Release 6.4. This is described in greater detail in the *Comergent eBusiness System Developer Guide*.

The state transitions for an order are defined in the **EnterpriseOrderStateMachine.xml** configuration file: this file determines what

business logic is performed when an order is to be moved from one state to another, and specifies what actions should be performed if the transition is successful. For example, the following fragment from the **EnterpriseOrderStateMachine.xml** configuration file specifies what should happen to an order in the “Open” state when one of the valid inputs is received, and what state the order should be moved to if the transition is successful:

```
<State Name="Open" Start="true">
  <Description>This is the initial State in the Ordering flow.</
Description>
  <InputList>
    <Input Name="ORDER INPUT USER PLACE"
      Roles="Partner.DirectCommerceUser;Registered.User;
        Enterprise.CustomerServiceRepresentative">
      <Description>This is the "Place" action.</Description>
      <NextState>Order Submitted</NextState>
      <ActionHandlerList>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.OrderPlaceHandler
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.OrderPersistHandler
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.SaveDiscounts
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.WriteHistoryHandler
        </ActionHandler>
      </ActionHandlerList>
      <ActionEventList>
        <ActionEvent>OrderPlaceEmailEvent</ActionEvent>
      </ActionEventList>
    </Input>
    <Input Name="ORDER INPUT XML PLACE"
      Roles="Partner.DirectCommerceUser;Registered.User">
      <Description>This is the "Place" action.</Description>
      <NextState>Order Submitted</NextState>
      <ActionHandlerList>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.PreProcessXMLPlaceHandler
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.OrderPlaceHandler
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.OrderPersistHandler
        </ActionHandler>
      </ActionHandlerList>
    </Input>
  </InputList>
</State>
```

```
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.SaveDiscounts
        </ActionHandler>
        <ActionHandler>
com.comergent.apps.orderMgmt.orders.bizAPI.WriteHistoryHandler
        </ActionHandler>
    </ActionHandlerList>
    <ActionEventList>
        <ActionEvent>OrderPlaceEmailEvent</ActionEvent>
    </ActionEventList>
</Input>
</InputList>
</State>
```

The way to read this file is to start with the State element. In this example, the Name attribute of the State is “Open”. If an order is in the “Open” state, and a request is received to process this order with the “ORDER INPUT USER PLACE” input, then the request is processed as follows:

1. The state machine verifies that “ORDER INPUT USER PLACE” is a valid input for an order in this state.
2. The Roles attribute of the Input element is checked to see that the user attempting the state change is entitled to do this. Note that the list of roles is delimited by semi-colons (“;”), rather than commas.
3. The handler classes are invoked one after the other, in this order:
 - a. com.comergent.apps.orderMgmt.orders.bizAPI.OrderPlaceHandler
 - b. com.comergent.apps.orderMgmt.orders.bizAPI.OrderPersistHandler
 - c. com.comergent.apps.orderMgmt.orders.bizAPI.SaveDiscounts
 - d. com.comergent.apps.orderMgmt.orders.bizAPI.WriteHistoryHandler
4. If one of the handler classes throws an `InputFailedException`, then processing is halted, and the order remains in its current state. If all of the handlers process their `performInputAction()` method successfully, then the order is moved into the “Order Submitted” state, and an `ActionEvent`, `OrderPlaceEmailEvent`, is fired. This is processed by the `EventBus`: see the *Comergent eBusiness System Developer Guide* for further information.

Reference Implementation Transitions

The following diagrams illustrate the state transitions supported by the reference implementation of the Comergent eBusiness System.

Order States

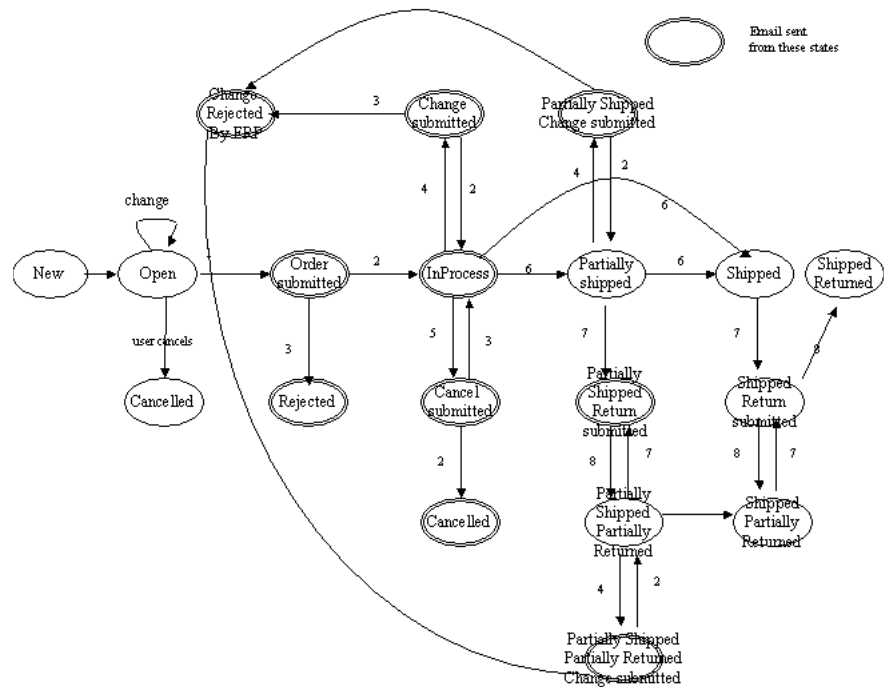


FIGURE 19. Order State Transitions

The numbers in the diagram refer to the messages that are sent to an external system as the order moves from one state to another, or which are received from an external system and which cause a change in order state:

1. OrderCreate message sent to external system
2. StatusUpdate(accepted) message received from external system
3. StatusUpdate(rejected) message received from external system
4. OrderChange message sent to external system
5. OrderCancel message sent to external system
6. ShipmentUpdate message received from external system

7. ReturnCreate message sent to external system
8. RMAUpdate message received from external system

Order Line States

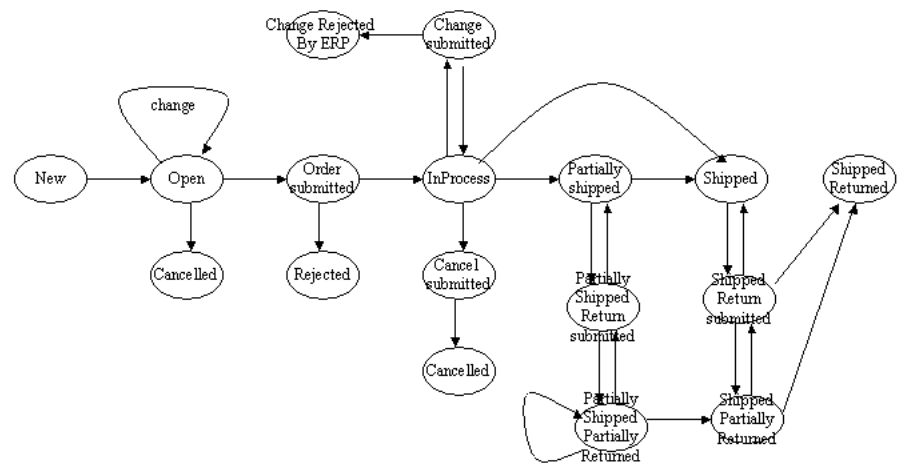


FIGURE 20. Order Line State Transitions

Return States

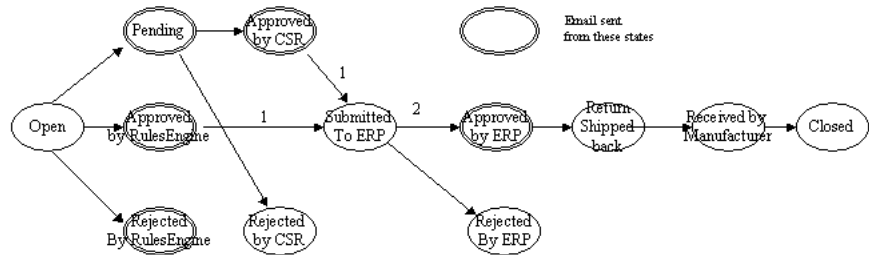


FIGURE 21. Return State Transitions

The numbers in the diagram refer to the messages that are sent to an external system as the return moves from one state to another, or which are received from an external system and which cause a change in return state:

1. Message sent to external system
2. RMAUpdate message received from external system

Setting Up Order and Return States

Order and return states are defined in the CMGT_LOOKUPS table. As orders and returns move from one state to another, the states must be present in this table. Each order state is identified by the string “order_status” in the LOOKUP_TYPE column. The DESCRIPTION column of the table identifies the value of the state: “Open”, “Cancel submitted”, and so on.

Similarly, each return state is identified by the string “return_status” in the LOOKUP_TYPE column and the value of the state is contained in the DESCRIPTION column: “Open”, “Pending”, etc. In addition, return reasons and return criteria are also defined in the CMGT_LOOKUPS table.

Order states are loaded into the CMGT_LOOKUPS table using the XMLLoader utility. See "Populating the Knowledgebase" on page 96 for more information regarding the use of this utility.

Each order state is created with a LightweightLookup element in the **LightWeightLookupList** file of the form:

```
<LightWeightLookup state="INSERTED">
  <LookupType state="INSERTED">order_status</LookupType>
  <LookupCode state="INSERTED">1</LookupCode>
  <Description state="INSERTED">Shipped</Description>
  <Locale state="INSERTED">en_US</Locale>
  <Flag state="INSERTED">1</Flag>
</LightWeightLookup>
```

Controllers and BLCs

The business logic to manage orders and returns is implemented through the **C3** Orders and **C3** Returns applications. These applications include sets of controllers and business logic classes (BLCs). See the *Comergent eBusiness System Developer Guide* for more information about the general architecture of the Comergent eBusiness System and how controllers and BLCs are used.

C3 Orders

Controllers

All the **C3** Orders controller classes extend the ForwardController class. In particular, the SimpleController class extends the ForwardController and many of the **C3** Orders controllers extend the SimpleController.

BLCs

All the **C3** Orders BLCs extend the basic BLC class. The BLCs used to respond to message requests from an external ERP system extend the CommonOrderXMLBLC class which is a subclass of the basic BLC class.

C3 Returns

Controllers

All the **C3** Returns controller classes extend the SimpleController class.

BLCs

All the **C3** Returns BLCs extend the basic BLC class.

Messages to and from External Systems

All of the messages exchanged between the Comergent eBusiness System and an external ERP system are defined in the dXML message family. See the *Comergent eBusiness System Reference Guide* for more information about the dXML DTDs.

The following outbound messages from the Comergent eBusiness System must be processed by the ERP system:

- ERPOrderCreate
- ERPOrderChange
- ERPOrderCancel
- OrderCancelResponse
- OrderChangeResponse
- OrderCreateResponse

The following inbound messages may be received from an external ERP system:

- OrderAcknowledgement
- OrderCancelRequest
- OrderChangeRequest
- OrderCreateRequest
- RMAUpdateRequestFromERP
- ShipmentUpdateFromERPRequest
- StatusUpdateFromERPRequest

Example Messages

This section provides examples of the message types listed above.

OrderCancelRequest

```
<Comergent>
  <MessageHeader>
    <MessageType>OrderCancelRequest</MessageType>
    <MessageVersion>3.0</MessageVersion>
    <MessageID/>
```

```
        <SessionID/>
    </MessageHeader>
    <RemoteUser>
        <UserLogin>mscott</UserLogin>
        <UserFullName/>
        <UserAuthenticator>mscott</UserAuthenticator>
    </RemoteUser>
    <Order type="BusinessObject">
        <OrderKey>249e11554246efbb</OrderKey>
        <ForwardToERP>Y</ForwardToERP>
    </Order>
</Comergent>
```

OrderChangeRequest

```
<Comergent>
    <MessageHeader>
        <MessageType>OrderChangeRequest</MessageType>
        <MessageVersion>3.0</MessageVersion>
        <MessageID/>
        <SessionID/>
    </MessageHeader>
    <RemoteUser>
        <UserLogin>mscott</UserLogin>
        <UserFullName/>
        <UserAuthenticator>mscott</UserAuthenticator>
    </RemoteUser>
    <Order type="BusinessObject">
        <OrderKey>24814acc546adc5f</OrderKey>
        <ForwardToERP>Y</ForwardToERP>
        <LineItemList>
            <LineItem>
                <ChangeOperation>INSERTED</ChangeOperation>
                <SKU>MX-LNXA</SKU>
                <Quantity>55</Quantity>
                <OrderLineItemShipOrderAddress>
                    <FirstName>Bill</FirstName>
                </OrderLineItemShipOrderAddress>
            </LineItem>
        </LineItemList>
    </Order>
</Comergent>
```

OrderCreateRequest

```
<Comergent>
    <MessageHeader>
        <MessageType>OrderCreateRequest</MessageType>
        <MessageVersion>3.0</MessageVersion>
        <MessageID/>
```

```
<SessionID/>
</MessageHeader>
<RemoteUser>
  <UserLogin>mscott</UserLogin>
  <UserFullName/>
  <UserAuthenticator>mscott</UserAuthenticator>
</RemoteUser>
<Order state="INSERTED" type="BusinessObject">
  <ShoppingCartKey>21</ShoppingCartKey>
  <EmailAddress>sborra@comergent.com</EmailAddress>
  <PaymentType>2</PaymentType>
  <LastName>bbbbaaaaa</LastName>
  <PONumber>2</PONumber>
  <OrderDate>2001-06-18 15:20:12.0</OrderDate>
  <OrderCurrencyCode>0</OrderCurrencyCode>
  <CreditCardType/>
  <CreditCardHolder>cch</CreditCardHolder>
  <PaymentExpirationDate>
    2001-12-31 0:0:0.0
  </PaymentExpirationDate>
  <FirstName/>
  <PhoneNumber/>
  <ShippingMethod/>
  <PaymentNumber/>
  <ForwardToERP>Y</ForwardToERP>
  <ShipOrderAddress state="INSERTED">
    <AddressKey/>
    <AddressType/>
    <FirstName/>
    <LastName/>
    <Title/>
    <CompanyName/>
    <MailStop/>
    <Country/>
    <Address1/>
    <Address2/>
    <City/>
    <PostalCode/>
    <State/>
    <County/>
    <RefNum/>
  </ShipOrderAddress>
  <SoldOrderAddress state="INSERTED">
    <AddressKey/>
    <AddressType/>
    <FirstName/>
    <LastName/>
    <Title/>
    <CompanyName/>
```

```
<MailStop/>
<Country/>
<Address1/>
<Address2/>
<City/>
<PostalCode/>
<State/>
<County/>
<RefNum/>
</SoldOrderAddress>
<BillOrderAddress state="INSERTED">
  <AddressKey/>
  <AddressType/>
  <FirstName/>
  <LastName/>
  <Title/>
  <CompanyName/>
  <MailStop/>
  <Country/>
  <Address1/>
  <Address2/>
  <City/>
  <PostalCode/>
  <State/>
  <County/>
  <RefNum/>
</BillOrderAddress>
<LineItemList>
  <LineItem state="INSERTED">
    <Description/>
    <Quantity>30</Quantity>
    <ConfigFlag/>
    <ConfigContainer/>
    <UnitOfMeasure/>
    <TransferredListPrice/>
    <TransferStatus/>
    <SKU>MX-LNXA</SKU>
    <SKUAuthority>10020</SKUAuthority>
  </LineItem>
</LineItemList>
</Order>
</Comergent>
```

ReturnCreateRequest

```
<?xml version="1.0" encoding="UTF-8"?>
<Comergent>
  <MessageHeader>
    <MessageType>ReturnCreateRequest</MessageType>
    <MessageVersion>2.0</MessageVersion>
```

```
<MessageID/>
<SessionID/>
</MessageHeader>
<RemoteUser>
  <UserLogin>mscott</UserLogin>
  <UserFullName/>
  <UserAuthenticator>mscott</UserAuthenticator>
</RemoteUser>
<OneReturn type="BusinessObject" state="INSERTED">
  <OrderKey>91598c1c53129067</OrderKey>
  <ReturnLineItemList state="INSERTED">
    <ReturnLineItem state="INSERTED">
      <ReturnLineKey>10047</ReturnLineKey>
      <QuantityReturned state="INSERTED">1</QuantityReturned>
      <ReturnReason state="INSERTED">1</ReturnReason>
      <ReturnCriterion state="INSERTED">1</ReturnCriterion>
    </ReturnLineItem>
  </ReturnLineItemList>
</OneReturn>
</Comergent>
```

RMAUpdateRequestFromERP

```
<?xml version="1.0" encoding="UTF-8" ?>
<Comergent>
  <MessageHeader>
    <MessageType>RMAUpdateFromERPRequest</MessageType>
    <MessageVersion>2.0</MessageVersion>
    <MessageID/>
    <SessionID/>
  </MessageHeader>
  <RemoteUser>
    <UserLogin>ajones</UserLogin>
    <UserFullName/>
    <UserAuthenticator>ajones</UserAuthenticator>
  </RemoteUser>
  <RMAUpdate type="BusinessObject" state="INSERTED">
    <ReturnKey>201</ReturnKey>
    <RMANumber>2987</RMANumber>
    <Title>Mr</Title>
    <FirstName>fname</FirstName>
    <LastName>llname</LastName>
    <CompanyName>ccname</CompanyName>
    <Address1>llline1</Address1>
    <Address2>llline2</Address2>
    <City>boston</City>
    <PostalCode>98765</PostalCode>
    <State>MA</State>
    <Country>USA</Country>
    <ShippingMethod>Fedex</ShippingMethod>
```



```
</RMAUpdate>
</Comergent>
```

ShipmentUpdateFromERPRequest

```
<?xml version="1.0" encoding="UTF-8" ?>
  <Comergent>
    <MessageHeader>
      <MessageType>ShipmentUpdateFromERPRequest</MessageType>
      <MessageVersion>2.0</MessageVersion>
      <MessageID/>
      <SessionID/>
    </MessageHeader>
    <RemoteUser>
      <UserLogin>ajones</UserLogin>
      <UserFullName/>
      <UserAuthenticator>ajones</UserAuthenticator>
    </RemoteUser>
    <ShipmentUpdate type="BusinessObject" state="INSERTED">
      <OrderKey>579e752d946aafb1 </OrderKey>
      <ShipmentUpdateLineItemList>
        <ShipmentUpdateLineItem>
          <LineKey>10075</LineKey>
          <ShipmentUpdateSerialLineItemList>
            <ShipmentUpdateSerialLineItem>
              <ShippedSerialNumber>s11</ShippedSerialNumber>
            </ShipmentUpdateSerialLineItem>
            <ShipmentUpdateSerialLineItem>
              <ShippedSerialNumber>s12</ShippedSerialNumber>
            </ShipmentUpdateSerialLineItem>
          </ShipmentUpdateSerialLineItemList>
        </ShipmentUpdateLineItem>
      </ShipmentUpdateLineItemList>
    </ShipmentUpdate>
  </Comergent>
```

StatusUpdateFromERPRequest

```
<Comergent>
  <MessageHeader>
    <MessageType>StatusUpdateFromERPRequest</MessageType>
    <MessageVersion>2.0</MessageVersion>
    <MessageID/>
    <SessionID/>
  </MessageHeader>
  <RemoteUser>
    <UserLogin>msscott</UserLogin>
    <UserFullName/>
    <UserAuthenticator>msscott</UserAuthenticator>
  </RemoteUser>
```

```
<ERPStatusUpdate type="BusinessObject" state="INSERTED">
  <OrderKey>24814acc546adc5f</OrderKey>
  <ERPOrderNumber>876</ERPOrderNumber>
  <ERPResponse>Accepted</ERPResponse>
</ERPStatusUpdate>
</Comergent>
```

Integrating with External Data Sources

To integrate the Comergent eBusiness System with your existing e-commerce systems, you must provide the Comergent eBusiness System with the information necessary to retrieve information from external data sources. This can involve working with the following:

- Comergent Schema
- DataService Classes
- Sales Tax Calculation
- Credit Card Authorization
- Loading Invoices
- LDAP Authentication
- Implementing a Single Sign-On Solution
- RosettaNet Setup Steps
- Sending XML Messages to an External System

Comergent Schema

The Comergent eBusiness System uses the concept of *data object* to encapsulate the data that the business logic classes use. Data objects correspond to the business

entities in the system such as partners, products, shopping carts, and so on. An introduction to data objects is provided in the *Comergent eBusiness System Developer Guide* and is covered in more depth in the *Comergent eBusiness System Reference Guide*.

With the installation of the Comergent eBusiness System, standard data objects are created for your use. If you want to create additional data objects, or modify and extend the current data objects, then you also need to run the DTD and Bean generation targets. See "Data Objects" on page 130 for further information.

DataService Classes

The DataService attribute of the Primary and Alternate elements of a DataSource element determines the Java class that is invoked to execute the connection to the external service. For example, if DataService="JdbcService", then the JDBCService class is invoked to interact with the database whose connection string is defined by ConnectionString="connectionString".

The mapping between strings used to define data services and the classes invoked is maintained in the **DataServices.xml** configuration file. For example, the following elements ensure that when the DataService attribute is "JdbcService", then the JDBCService class is used to access the external data source.

```
<JdbcService controlType="text" runtimeDisplayed="true"
  ChangeOnlyAtBootTime="true" visible="true" boxsize="45"
  displayQuestion="JdbcService class name"
  defaultChoice="com.comergent.dcm.dataservices.JDBCService"
  help="Enter the DataService class that extends the DataService
  abstract class provided. This class is used to support accessing
  data sources that are JDBC-complaint databases.">
  com.comergent.dcm.dataservices.JDBCService
</JdbcService>
<MsgService controlType="text" runtimeDisplayed="true"
  ChangeOnlyAtBootTime="true" visible="true" boxsize="45"
  displayQuestion="MsgService class name"
  defaultChoice="com.comergent.dcm.dataservices.MsgService"
  help="Enter the DataService class that extends the DataService
  abstract class provided. This class is used to support accessing
  data sources that are NOT DBC-complaint (Messaging source).">
  com.comergent.dcm.dataservices.MsgService
</MsgService>
```

Similarly, when the DataService attribute is "MsgService", then the MsgService class is used to access the external data source.

If the primary data service is unavailable, then the alternate data service is used. This data service might use a different Java class and a different means of connecting to the external source. For example, it might emulate a browser by connecting to a URL on an external system and retrieve information from the returned HTML page. See "HTMLService Class" on page 342 for more information on how to write a DataService class that retrieves data in this manner.

In general, the Java class used as the DataService is a sub-class of the abstract class DataService provided by the Comergent eBusiness System. Two examples of such sub-classes are provided by JDBCService and MsgService that are used to handle JDBC database connections and messages respectively.

In general, the DataService classes use the methods *persist()* and *restore()* to save data from the Comergent eBusiness System into a persistent data store and to retrieve data from the data store into the Comergent eBusiness System respectively. See the *Comergent eBusiness System Reference Guide* for further details on how to implement a DataService sub-class. See "Sending XML Messages to an External System" on page 333 for an example of using the message service.

Sales Tax Calculation

The Comergent eBusiness System has basic support for calculating sales tax information and shipping information.

- If you do not set the useExternalTaxSystem element to "true", then sales tax is calculated using the tax percentages set in the Knowledgebase CMGT_LOCAL_TAX table. See the *Comergent eBusiness System Reference Guide* for further information.
- Shipping charges are retrieved from the Knowledgebase CMGT_LOCAL_SHIP_COST table. See the *Comergent eBusiness System Reference Guide* for further information.

Credit Card Authorization

In this release, credit card transactions are supported by means of the payment gateway mechanism: see CHAPTER 15, "Implementing a Payment Gateway". This section is provided for legacy purposes.

Note that the use of the useExternalCreditCardAuthorization business rule is no longer supported. Earlier releases, used to have the following configuration setting:

- If you do not set the `useExternalCreditCardAuthorization` element to “true”, then credit card authorization is not performed.

The Comergent eBusiness System supports the use of an external software product, CyberSource, to authenticate credit cards and to retrieve sales tax information. You can implement either or both functions. Follow these steps:

1. Purchase a license from CyberSource: this license must support either or both of credit card authorization and sales tax calculation. You should receive a merchant ID and a merchant reference number as part of the license. In the following we refer to these as *merchant_id* and *merchant_reference_number*. You should also be told the server URL to use in Step 6.
2. Download the Internet Commerce Suite (ICS) Software Development Kit. It is packaged in the form of a ZIP file: currently it is **SDK_4.0.3_java.zip**, but the version may change.
3. Extract the following files: **ics.jar**, **Ecert.class**, and **ICSCClient.props**.
4. Run the Ecert class to generate the certificates, keys, and password files for your implementation. Enter:

```
java Ecert <merchant_id>
```

You may need to set the classpath to pick up all the required classes. The following files are created: *merchant_id.crt*, *merchant_id.pvt*, *merchant_id.pwd*, and *CyberSource_SJC_US.crt*.

5. Copy the files generated in Step 4 to ***debs_home/Comergent/Web-INF/properties/orderManagement/***.
6. Edit the ***debs_home/Comergent/Web-INF/properties/orderManagement/ICSClients.prop*** file to enter the following properties:

```
merchantID=merchant_id
serverName=CyberSource_SJC_US
serverURL=<CyberSource Server URL>
myPrivateKey=<Absolute path to location of the merchant_id.pvt
file>
myCert=<Absolute path to location of the merchant_id.crt file>
serverCert=<Absolute path to location of the
```

CyberSource_SJC_US.crt file>

The server URL must be the one that CyberSource provides as described in Step 1.

If you have followed the instructions above, then the location of the merchant_id.pvt file is ***debs_home/Comergent/WEB-INF/properties/orderManagement/merchant_id.pvt***.

If you have followed the instructions above, then the location of your certificate file is ***debs_home/Comergent/WEB-INF/properties/orderManagement/merchant_id.crt***.

If you have followed the instructions above, then the location of the server certificate is ***debs_home/Comergent/WEB-INF/properties/orderManagement/CyberSource_SJC_US.crt***.

7. Copy **ics.jar** to ***debs_home/Comergent/WEB-INF/lib/***.
8. Edit the orderCCauthorizationPropsFile element in **Comergent.xml** to point to the location of the **ICSCClient.props** file. If you have followed the steps above, then this location is "***debs_home/Comergent/WEB-INF/properties/orderManagement/ICSCClient.props***".
9. In the **Comergent.xml** file, set the value of the merchantRefNumber element to the merchant reference number provided by CyberSource.
10. Enable credit card authorization and sales tax calculation as follows:
 - a. To enable credit card authorization, set the following element in **BusinessRule.xml** to "true": useExternalCreditCardAuthorization.
 - b. To enable sales tax calculation, set the following element in **BusinessRule.xml** to "true": useExternalTaxSystem.
11. Restart the servlet container.

Customization

The default implementation of credit card authorization and sales tax calculation may not meet all your needs. This section covers the main topics that you need to consider when performing customization.

Currently, the methods to perform credit card authorization and sales tax calculation are invoked in the OrderInquiryList class that implements the bizAPI for processing an order. In turn, this uses the OILCreditCard and OILTaxes classes to invoke the ICS classes.

The principal ICS classes used are:

- **ICSCClient**: the main class used to perform the request. Its *ICSCClient(String s)* constructor is used to pass in the location of the **ICSCClient.props** file.
- **ICSCClientRequest**: use this class to invoke the **ICSCClient** *reply()* method. Its *ICSCClientRequest(ICSCClient icsc)* constructor is used to populate the request with configuration information from the **ICSCClient.props** file. Use its accessor methods to set the data fields: for example, *setMerchantRefNo()* to set the merchant reference number.

You must use its *addApplication(String s)* to specify whether the request is for credit card authorization ("ics_auth") or for a sales tax calculation ("ics_tax").
- **ICSReply**: this class provides the response to the request. Its accessor methods provide the information you need. In particular, if *getReplyCode()* returns an integer less than or equal to zero, then the request failed and its *getErrorMessage()* method provides a reason for the failure.

The required fields to execute a request are provided in "Required Data" on page 320. Consult the ICS documentation for further information relating to the ICS API and its classes.

Required Data

To perform a credit card authorization, you must supply the following data:

- Merchant Reference Number: obtained from **Comergent.xml**
- Merchant ID: obtained from **ICSCClient.props** file
- Customer First Name
- Customer Last Name
- Customer Email Address
- Customer Phone
- Bill Address1
- Bill Address2
- Bill City
- Bill State
- Bill Zip

- Bill Country
- Amount: must be at least 0.1 and greater than zero
- Customer Credit Card Number
- Customer Credit Card Expiration Month
- Customer Credit Card Expiration Year
- Currency

To perform a sales tax calculation, you must supply the following data:

- Merchant Reference Number (obtained from **Comergent.xml**)
- Merchant ID (obtained from **ICSCClient.props** file)
- Bill Address1
- Bill Address2
- Bill City
- Bill State
- Bill Zip
- Bill Country
- Amount: can be 0.0

Loading Invoices

C3 Invoicing provides the ability for your enterprise and your partners to interactively manage invoices. Invoices generated by an existing ERP system can be imported into the Comergent eBusiness System and then both enterprise users and partner users can view and update the invoices through their browser. See the *Comergent eBusiness System Administration Guide* for more information on how users can manage invoices.

To load invoices into the Comergent eBusiness System, you must post them into the system as XML messages. The following message types are supported:

- InvoiceCreateRequest
- InvoiceChangeRequest
- OrderShipmentUpdateRequest: set the GenerateInvoice element to “Y”.

The message types are defined as dXML 4.1 DTDs: these are provided in the ***debs_home/Comergent/WEB-INF/dXML/4.1/*** directory.

Example messages can be provided on request: please contact your Comergent Technologies representative for further information.

A sample tool, called **dship.bat**, to post messages into the Comergent eBusiness System can also be provided. Edit the file by changing the **CONTAINER_HOME** and **SERVER_URL** variables to point to your installation of the Comergent eBusiness System, and then run the script at the command line.

LDAP Authentication

Release 7.0.2 of the Comergent eBusiness System supports the use of LDAP (Lightweight Directory Access Protocol) for user authentication.

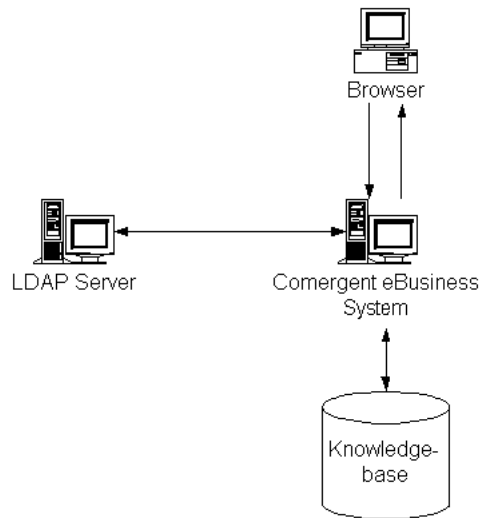


FIGURE 22. LDAP Authentication

When a user attempts to log into the Comergent eBusiness System, they provide their username and password. If the Comergent eBusiness System is implemented to use LDAP, then the authentication step is performed against the external LDAP server rather than against the Knowledgebase.

To set up LDAP Authentication

1. For each user created in the Comergent eBusiness System, create a corresponding user on the LDAP server with the same username and password as they use on the Comergent eBusiness System. Set the users up using a base distinguished name (Base DN) of “icc”.
2. Edit the **Comergent.xml** LDAP entries as follows:
 - EnableLDAPAuthentication: set to “true”.
 - LDAPURLs: set to the URL used to access the LDAP server. Typically, this of the form:

```
ldap://<ldapserver:port>
```
 - BaseDN: set to “o=icc”.
 - SecurityAuthentication: set to “simple”.
 - AdminLogin: set to an administrator username to the LDAP server.
 - AdminPasswd: set to the password used to authenticate the LDAP server administrator specified in the AdminLogin element.
3. Restart the Comergent eBusiness System servlet container.

Note the following:

- You can use an existing base distinguished name instead of “icc”. Make sure that the BaseDN element is set to the chosen name. As you create new users within the Comergent eBusiness System, make sure that you create a user with the same username and password on the LDAP server.
- You do not have to use a full LDAP server administrator userid for the AdminLogin element, but the chosen userid must have administrative capabilities sufficient to open a connection to the LDAP server and to change LDAP user passwords.

Implementing a Single Sign-On Solution

In many implementations, the Comergent eBusiness System is one of a number of systems that live together in the enterprise environment. Unless a single sign-on solution is implemented, users may have to log on to different systems as they need to access them, and may have to remember different usernames and passwords to authenticate themselves for each system. At the same time, enterprise system administrators have to maintain userids on each system, and so as users come and

go and change their responsibilities, it becomes an administrative burden to maintain them all.

Consequently, implementing a single sign-on solution in the enterprise environment provides a way to manage users centrally in such a way that users can authenticate themselves once and then have access to all of the resources that they should. At the same time, it provides enterprise system administrators with a central location in which they can manage all their users and their entitlements. This section describes the basic framework for a single sign-on solution and how the Comergent eBusiness System can be customized to participate in it.

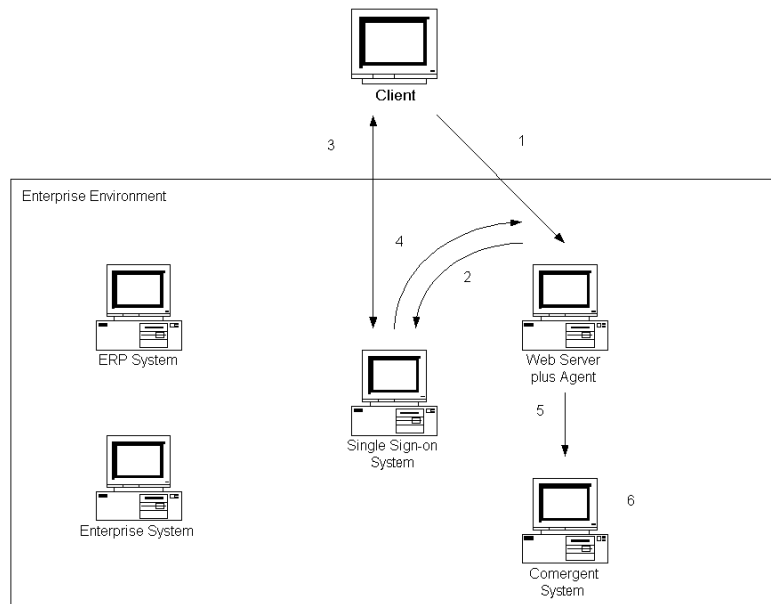


FIGURE 23. Single Sign-On Environment

Typically, an enterprise will implement a Single Sign-on solution by buying a single sign-on solution such as SiteMinder or Oblix, and delegate all authentication tasks to this server. Userids are maintained centrally on this system, and other systems (such as the Comergent eBusiness System) must maintain their userid information to be consistent with this central repository. This process of synchronization is discussed more fully below: see "Profile Synchronization" on page 326.

The setup of the Single Sign-on system will vary with each single sign-on solution, but the basic framework is fairly similar. In most cases, agents of the Single Sign-on system are installed in front of each of the other resource systems, and these agents act as filters to ensure that only authenticated users can access the resource system. For example, you can install an agent (such an Apache module or IIS filter) on a Web server that is mounted in front of the Comergent eBusiness System.

The typical flow of events when a user attempts to access one of the resource systems in a single sign-on environment goes like this:

1. The user points their browser to a URL that they should use to access a resource system such as the Comergent eBusiness System. This URL should not point directly to the Comergent eBusiness System, but rather to the Web server mounted in front of the Comergent eBusiness System.
2. The Web server in front of the Comergent eBusiness System filters the request and the installed agent checks to see if the user has already been authenticated by the Single Sign-on system and has a valid session token from the Single Sign-on system.
 - a. If so, then the request is passed through to the Comergent eBusiness System as an authenticated request.
 - If the request is already part of an authenticated Comergent eBusiness System session, then the request is processed exactly like any other request.
 - If the request does not have a valid Comergent eBusiness System session, then the request is passed to the appropriate login controller for processing, and the login controller makes use of special tokens provided in the request header to identify the user.
 - b. If the request does not have a valid session token from the Single Sign-on system, then the browser's request is redirected to the sign-on page served up by the Single Sign-on system.
3. The user enters their authentication credentials such as a username and password as provided to them by the administrators of the Single Sign-on system, and submits these to the Single Sign-on system.
4. If the Single Sign-on system successfully authenticates the user, then a special token is added to the request, and the request is redirected back to the URL used to access the Comergent eBusiness System through the Web server. The token signifies that the user has been authenticated and includes a special

identifier (such as a username or user key) that can uniquely identify the user in the Comergent eBusiness System.

5. The Web server in front of the Comergent eBusiness System filters the request and now sees that the request has a valid session token from the Single Sign-on system, and so now passes the request to the Comergent eBusiness System.
6. The Comergent eBusiness System receives the request and detects that the request does not yet have a valid Comergent eBusiness System session. The request is passed to the appropriate login controller. The login controller extracts from the request the unique identifier created in Step 4, creates a session for the user, and restores the user from the identifier so that relevant information such as their roles and which partner they belong to can be retrieved. See "Login Controllers" on page 327 for an example of changes that can be made to a login controller in a single sign-on environment.
7. The user then goes about their Comergent eBusiness System activities just as they would had they been able to log in directly to the Comergent eBusiness System.
8. At the end of their work in the Comergent eBusiness System, the user must log out. You must decide whether you want their act of logging out to apply only to the Comergent eBusiness System or to indicate that they are logging out of the enterprise environment as a whole. See "Logout Controllers" on page 331 for an example of how to customize the Comergent eBusiness System logout controller if you want the single sign-on session to be ended as well.

Profile Synchronization

For a single sign-on solution to work, it is critical to decide how profile information is to be maintained. In this section we describe some possible approaches.

Full Synchronization

In this approach, the enterprise administrators take on themselves the burden of maintaining a consistent view of users across the Single Sign-on system and the Comergent eBusiness System. Each time a new user needs access to the Comergent eBusiness System, a user profile must be added to the Single Sign-on system and a new user profile under the appropriate partner created on the Comergent eBusiness System. The two systems must be maintained so that a unique identifier (such as username) can be passed from the Single Sign-on system to the Comergent eBusiness System so that the user's profile can be retrieved from it.

Full synchronization can be automated in a number of different ways, such as using a third "master system" to push user information to both systems as it is created in

the master system, or by ensuring that the Single Sign-on system pushes data to the Comergent eBusiness System as it is created on the Single Sign-on system. In these scenarios, it is common to think of the Comergent eBusiness System as a slave to the Single Sign-on system, and so certain tasks such as user creation or password updates should be disabled in the Comergent eBusiness System.

Partial Synchronization

In this approach, the user profile administration is maintained on the Single Sign-on system, and is pushed to the Comergent eBusiness System when the user has successfully authenticated themselves against the Single Sign-on system. This approach requires that the Comergent eBusiness System login controller can create user profiles, and possibly partner profiles, on the fly, but has the advantage that enterprise administrators do not have a double maintenance task whenever users must be added or changed.

Login Controllers

This section describes the changes that typically have to be made to login controllers in a single sign-on enterprise environment. The examples assume that once the Web server with the agent has checked the request for the special token that the request is passed through with the token in the request header, and the unique identifier for the user is the username of the user in the Comergent eBusiness System.

Suppose that the `DCUserLoginController` is used to authenticate direct commerce users as they log in to the Comergent eBusiness System. Create a new controller class, say `SingleSignonLoginController` which extends the `DCUserLoginController`. In the `SingleSignonLoginController` class, overwrite methods as follows:

```
/**
 * If working in a single sign-on environment, then retrieve the login
 * information from the request header and set the password to a dummy
 * value.
 *
 * The boolean singleSignonBoolean indicates whether or not the
 * Comergent eBusiness System is operating in a single sign-on envi-
 * ronment. This
 * can be set as a System property or in configuration file.
 *
 * The unique user identifier is retrieved from the request as the
 * value of the SS_LOGIN request header.
 *
 * The SSCredentials class implements the Credentials interface.
 */
```

```
protected Credentials getCredentials()
{
    if (!singleSignonBoolean)
    {
        login = request.getParameter(LOGIN);
        passwd = request.getParameter(PASSWD);
        userType = request.getParameter(USERTYPE);
    }
    else
    {
        login = request.getHeader(SS_LOGIN);
        userType = request.getHeader(USERTYPE);
    }
    if (login == null || login.equals(""))
    {
        login = DUMMY_VALUE;
    }
    if (passwd == null)
    {
        passwd = DUMMY_VALUE;
    }
    SSCredentials credentials =
        new SSCredentials(login, passwd, userType);
    return new CommerceCategoryCredentials(credentials,
        PartnerLoginController.CommerceCategory_Direct);
}

/**
 * Performs default post login processing and synchronizes the Single
 * Sign-on roles
 *
 * @param oldSession the ComerгентSession object of the user
 * @exception ICCEException; IOException
 */
protected String postLoginProcessing(ComerгентSession oldSession)
    throws ICCEException, IOException
{
    //Perform any processing logic in the parent controller
    super.postLoginProcessing(oldSession);
    if (singleSignonBoolean)
    {
        /**
         * Perform logic to match up roles from Single Sign-on system
         * with Comerгент System roles.
         */
    }
}

protected boolean doLogin()
```



```
{  
    return true;  
}
```

Credentials Class

The login controller makes use of a Credentials class to retrieve user information from the Comergent eBusiness System Knowledgebase. Here is an example Credentials class to illustrate the main function this class performs:

```
public class SSCredentials extends UserPasswordCredentials  
{  
    String m_userType = null;  
    /**  
     * Constructor  
     * @param userName the username of the user  
     * @param password the associate password of the user  
     * @param userType the type of user for the given username  
     */  
    public SSCredentials(String userName, String password,  
        String userType)  
    {  
        super(userName, password);  
        this.m_userType = userType;  
    }  
  
    /**  
     * Create the user object for the username, password, and usertype  
     * @return the user object  
     */  
    public User getUser()  
    {  
        if (m_user != null)  
            return m_user;  
        try  
        {  
            SSUserBean userBean = (SSUserBean)  
                OMWrapper.getObject("com.comergent.bean.simple.UserBean");  
            DsQuery query = QueryHelper.newWhereClause("UserLogin",  
                DsQueryOperators.EQUALS, m_username);  
            query = QueryHelper.addWhereClause(query,  
                DsQueryOperators.AND, "UserType",  
                DsQueryOperators.EQUALS, m_userType);  
            if ( !m_userType.equals("internal") )  
            {  
                query = QueryHelper.addWhereClause(query,  
                    DsQueryOperators.AND, "ContactStatus",  
                    DsQueryOperators.EQUALS, "A");  
            }  
        }  
    }  
}
```

```
        DataContext dc = new DataContext();
        dc.disableAccessCheck();
        userBean.restore(dc, query);
        m_user = new User(userBean);
    }
    catch(ICCEException e)
    {
        m_user = null;
    }
    return m_user;
}

/**
 * Validate the user in with the information in the member
 * variables
 * @param session the ComergentSession the user is associated
 * @param messageType the message type
 * @return the validation status USER_OK means user is validated;
 *         INVALID_USER otherwise
 */
public int verify(ComergentSession session, String messageType)
{
    try
    {
        m_user = this.getUser();
        if ( m_user == null )
        {
            return INVALID_USER;
        }
        int retVal;
        if ((retVal = m_user.checkPassword(session)) != USER_OK)
        {
            return retVal;
        }
        return USER_OK;
    }
    catch (InvalidBizobjException ex)
    {
        ex.printStackTrace();
        return INVALID_USER;
    }
    catch (Exception e)
    {
        e.printStackTrace();
        return INVALID_USER;
    }
}
```

Logout Controllers

This section describes the changes that typically have to be made to logout controllers in a single sign-on enterprise environment. In this example, the aim is to ensure when a user clicks the Logout button on a Comergent eBusiness System page that they are logged out of both the Comergent eBusiness System and the Single Sign-on system, and so are logged out effectively all other systems that are being managed by the Single Sign-on system.

```
public class SSLogoutController extends
    com.comergent.dcm.caf.controller.Controller
{
    public void execute() throws ControllerException, ICCEException,
        IOException
    {
        session.logout();
        session.setLocale(ComergentI18N.getDefaultLocale());
        String redirect = null;
        if (singleSignonBoolean)
        {
            redirect = Global.getString("SSLogoutURL");
        }
        else
        {
            redirect = request.constructAppURL(
                ComergentAppEnv.getDefaultApp(),
                ComergentAppEnv.getDefaultMessageType());
        }
        response.sendRedirect(response.encodeRedirectURL(redirect));
    }
}
```

This example controller first closes the Comergent eBusiness System session, and then if the Comergent eBusiness System is operating in single sign-on environment, it redirects the request to a URL that will close the Single Sign-on system session for this user.

RosettaNet Setup Steps

If you plan to implement support for RosettaNet messaging: either to initiate or respond to RosettaNet messages, then follow these steps:

1. Copy the RosettaNet DTDs from *debs_home/Comergent/WEB-INF/rosettanet/* to the working directory of your servlet container. This location varies from one servlet container to another: default locations are listed here:

TABLE 25. Working Directories

Servlet Container	Home Location
IPPlanet	/iPlanet/iAS6/
JRun	/usr/local/jrun/servers/default/
WebSphere	/usr/WebSphere/AppServer/bin
Tomcat	/usr/local/tomcat/bin
WebLogic	/apps/bea61sp2/wlserver6.1/

2. Identify your enterprise's RosettaNet DUNS (Data Universal Numbering System) identifier: this is used in messages.
3. Log in to the Comergent eBusiness System as an enterprise administrator and navigate to the Enterprise partner profile.
4. On the detail tab, set the Dun & Bradstreet ID field to your DUNS identifier.
5. Click **Save All**.
6. Click **Logout**.
7. Edit the **RosettaNet.xml** file in *debs_home/Comergent/WEB-INF/properties/* to set the value of the GlobalBusinessIdentifier element to your DUNS identifier. This value is used to identify your enterprise when RosettaNet messages are sent to a partner system.
8. Edit the **RosettaNet.xml** file to add the mapping between your partners' DUNS identifiers and the URLs to which RosettaNet messages must be sent to them. This is usually the same as the message URL that you set up for them in the partner profile. Each child element of the returnUrl element looks like this:

```
<bus0231-a34f ...>
  http://<URL to post RosettaNet messages>
</bus0231-a34f>
```

The DUNS identifier is used as the name of the element. If your partner is also running the Comergent eBusiness System, then the URL is likely to have this form: `http://<server:port>/Comergent/msg/matrix`.

9. Let your partners know your DUNS identifier and the URL that they should use when sending RosettaNet messages to you.

If they are using the Comergent eBusiness System to send RosettaNet messages to you, then they must add this information to the **RosettaNet.xml** on their system: from their point of view, you are one of their partners and so they must add your DUNS identifier and URL to their returnUrl element.

10. If you are using a load balancer to support a clustered implementation of the Comergent eBusiness System, then set the ServerLoadBalanceUrl element in **Comergent.xml** to point to the URL used to access the load balancer.

Sending XML Messages to an External System

The following procedure describes the steps involved in sending out XML messages from the Comergent eBusiness System. This example has been implemented for Order Management (for example, ERPOrderCreate message to send to an ERP system) and this will be used to illustrate the steps. See "Description of HTTP Process" on page 337 for details on what happens at the HTTP level.

An example where you may need this ability is when you create new users in the Comergent eBusiness System. These may need to be synchronized with an external system, and so you may need to send out an XML message to an external system.

Assume that there is a simple data object that can hold the information to be sent out as an XML message. In this example, this is the Order data object defined in **Order.xml**. In the standard implementation of the Comergent eBusiness System, this data object can be created, populated with data, and then persisted to the Knowledgebase by invoking a *persist()* call. The steps below describe how to send out an XML message with the same content.

Step 1: Define a Remote Data Object

The first step is to define a data object to be used for the remote operation. In this example, we use RemoteOrder.

```
<?xml version="1.0"?>
<DataObject Name="RemoteOrder" Extends="Order"
  MsgType="ERPOrderCreateRequest" ObjectType="MSG" Version="6.0">
  <DataFieldList>
    <DataField Mandatory="n" Name="ERPSpecificCreateField"
      Writable="y"/>
  </DataFieldList>
```

```
</DataObject>
```

Note that the RemoteOrder data object extends the Order data object. Also note that the ObjectType attribute value is MSG. The MsgType attribute should be set to whatever message type the outgoing XML message should have.

Add any additional data fields needed (over and above whatever is in the base data object: in this case Order).

Create the required entries in **DsBusinessObjects.xml**, **DsRecipes.xml**, and **DsDataElements.xml** files. The **DsRecipes.xml** entry should look something like this:

```
<Recipe BusinessObject="RemoteOrder"
  Description="RemoteOrder Create Recipe" Name="RemoteOrder"
  Version="4.0">
  <DataObjectList>
    <DataObject Access="RWID" DataSourceName="MESSAGE"
      Name="RemoteOrder" Ordinality="1" Version="6.0"/>
  </DataObjectList>
</Recipe>
```

Note that the DataSourceName attribute is set to "MESSAGE". This value is used by the corresponding DataSource element in the **DBDataSources.xml** file to determine which data service class to use. For example:

```
<DataSource Name="MESSAGE" Type="DEFAULT" Version="2.0">
  <Primary DataService="MsgService"/>
</DataSource>
```

Step 2: Define a DTD

Define a DTD for the outgoing message. This must have the same name as the MsgType attribute defined in "Step 1: Define a Remote Data Object" on page 333. For example, for RemoteOrder, the DTD will be **ERPOrderCreateRequest.dtd**. This file should be saved in the *debs_home/Comergent/WEB-INF/messages/* directory. For example, the **ERPOrderCreateRequest.dtd** is defined as follows:

```
<?xml encoding="UTF-8"?>
<!-- ERPOrderCreateRequest
  Document Type Declaration (DTD)
  Version 1.0
  25-Jul-00
  Authors:
    Comergent
    Contact: (650) 610-6800
    support@comergent.com
-->
<!ENTITY % MessageHeader SYSTEM "MessageHeader.dtd">
```

```
%MessageHeader;  
<!ENTITY % RemoteUser SYSTEM "RemoteUser.dtd">  
%RemoteUser;  
<!ENTITY % RemoteOrder SYSTEM "../bizobjs/RemoteOrder.dtd">  
%RemoteOrder;  
<!ELEMENT Comergent (  
    MessageHeader,  
    RemoteUser,  
    RemoteOrder)  
>
```

Note that the DTD includes the generated DTD **RemoteOrder.dtd**. This DTD is generated automatically into the **WEB-INF/bizobjs/** directory when the generateDTD SDK target is run. Consequently, the DTD will remain consistent with the RemoteOrder data object even if changes are made to the underlying Order data object.

Step 3: XML Transmission Properties

The XML messages must be sent to a remote system. The Comergent eBusiness System needs several parameters to format and send this XML message. These include:

- username
- password
- URL
- message type
- message version
- security parameters for the remote system

The Comergent eBusiness System uses a Partner data object to hold all this information. For example, for sending Orders to ERP system, there is a ERPPartner object defined with the required information.

This partner key is set using a property defined in the **Comergent.xml** file from where the application can retrieve it. For Order Management applications, this property is ERPIntegrationURL.

Step 4: Code Changes

These steps are implemented in the Java source code of the application:

1. Instantiate a RemoteOrderBean object:

```
RemoteOrderBean remoteOrderBean = (RemoteOrderBean)
```

```
OMWrapper.getObject("com.comergent.bean.simple.RemoteOrderBean");
```

2. Call the data services method *copyBean()* to copy the content to this bean. For example:

```
orderBean.copyBean(remoteOrderBean);
```

3. Set values for any ERP specific fields in the RemoteOrderBean. For example, the code extract here sets the value for ERPSpecificCreateField we defined in "Step 1: Define a Remote Data Object" on page 333.

```
remoteOrderBean.setERPSpecificCreateField("Order Create Request  
from DEBS to ERP");
```

4. Set the partner key (the one defined in "Step 3: XML Transmission Properties" on page 335) on the RemoteOrderBean.

```
String ERPPartnerID =  
    Global.getString("C3_Integrator.ERPIntegrationUrl");  
remoteOrderBean.setPartnerId(ERPPartnerID);
```

The *setPartnerId()* method is inherited from the base DataBean class.

5. Set the values for the remote session.

```
RemoteSession remoteSession = new RemoteSession();  
remoteSession.setDistributorKey(new Long(ERPPartnerID));  
remoteSession.setId(null);  
remoteSession.setUser(username);  
remoteSession.setAuthenticator(password);  
ComergentAppEnv.addRemoteSession(remoteSession);
```

The username and password are those needed by the receiving system to authenticate the message.

6. Call *persist()* on the RemoteOrder data object.

```
remoteOrderBean.persist();
```

Note that this *persist()* call (which sends out the XML message) may fail or throw an Exception. The application must be aware of this eventuality and surround the *persist()* call in an appropriate throw-catch block. For example, in Order Management, when an Exception is thrown, the Order is marked specially and the message is retried later in a cron job.

Step 5: Using Converters

The *persist()* call in Step 6 of "Step 4: Code Changes" on page 335 will send out a Comergent XML message by default. To send out a message of a different type (say dXML or Rosettanet), you need to install appropriate converters. See CHAPTER 19, "Message Conversion" for more information.

Description of HTTP Process

All the Comergent eBusiness System messages are dispatched synchronously. The application thread waits for the message to be sent out on a new HTTP connection and for the response to come back. If possible, the HTTP response is used to retrieve any required information and to populate any data beans. If some failure condition arises, then an appropriate exception is thrown and handled accordingly.

Invoking *persist()* (as in Step 6 of our example in "Step 4: Code Changes" on page 335) on a data bean causes the Comergent eBusiness System to open a new HTTPConnection and to perform a post with the content formatted as an XML string.

The resulting response from this connection is converted to XML and then to a data bean if possible. In our example, this response message is `ERPOrderCreateReply`. In our reference implementation, this message just contains the same information as the request (which is the `RemoteOrder` bean). See **WEB-INF/messages/ERPOrderCreateReply.dtd** for more information.

This data object is copied into the bean (`remoteOrderBean` in the example). Thus the application at the end of the *persist()* method has the handle to the bean with the response content in it. The application may use this response content in its logic.

In the reference implementation, because the response is exactly the same content as in the request, we do not use it. In this specific example of sending an `ERPOrderCreateRequest` message, if the post is successful, then we move the `Order` to the `Order_Submitted` state. Otherwise the integration status is to "N". All orders with integration status set to "N" are handled by the `OrderERP` cron job. (See the *Comergent eBusiness System Developer Guide* for the state transitions supported by the `Order` data object).

A customer implementation may change the response content and use it in its logic (possibly to move the `Order` state to a different state).

Asynchronous Messages in the OrderMgmt Application

The `OrderMgmt` application can receive messages from an ERP system asynchronously. In the reference implementation, one such message is the `OrderStatusUpdateRequest` from the ERP system. The ERP system sends this message after it has received a `ERPOrderCreateRequest` from the Comergent eBusiness System and wants to indicate whether it accepts or rejects this `ERPOrderCreateRequest` message.

The `OrderStatusUpdateRequest` DTD has a field "ERPResponse" where the ERP system can set "Accepted" or "Rejected" to indicate whether the ERP system will

continue processing this ERPOrderCreateRequest message or not. If the Comergent eBusiness System receives the "Accepted" status, then it moves the order from the Order_Submitted to InProcess status. Otherwise, it moves it to the Rejected status. The Order State Machine described in the *Comergent eBusiness System Developer Guide* details these transitions in more detail.

Note that the reference implementation of OrderMgmt follows a strict State Machine and thus it accepts and processes incoming messages only in certain valid states. For example, it does not accept ERPOrderCreateReply from the ERP system unless it is a synchronous response to the ERPOrderCreateRequest that the Comergent eBusiness System has sent to the ERP system.

Trading Partner Enrollment Form

One of the challenges of managing integration with external partners is to effectively coordinate your deployments. To this end, a good practice is to distribute a trading partner enrollment form to your partners so that they can commit to a particular form of integration and schedule. A sample trading partner enrollment form is given here:

TRADING PARTNER ENROLLMENT FORM		
PARTNER NAME		
EDI TECHNICAL CONTACT:		
TELEPHONE :	FAX:	
EMAIL ADDRESS:		
REQUESTED TRANSACTIONS:		
ANSI X12 VERSION		
PLEASE IDENTIFY WHEN YOUR SYSTEMS WILL BE PREPARED TO SEND AND RECEIVE TEST DATA:	MONTH	DAY YEAR

PLEASE ADVISE WHEN YOUR
TECHNICAL AND BUSINESS
TEAM WILL BE AVAILABLE TO
DISCUSS IMPLEMENTATION
REQUIREMENTS:
ADDITIONAL FUNCTIONALITY?
PLEASE DESCRIBE:

MONTH	DAY	YEAR

Name	Test Environment	Production Environment
ISA Qualifier		
ISA ID		
GS ID		
Element Terminator		
Sub-Element Terminator		
Segment Terminator		

Emulating a Browser Interface to an External System

This chapter describes how you can create an interface for the Comergent eBusiness System to retrieve information from a browser-based e-commerce system. We provide a service class, called `HTMLService` to support this interface.

Overview

In an installation of the Comergent eBusiness System, you can use a number of different types of data sources. Earlier chapters have described the `JDBCService` and `MsgService` classes that enable the data integration layer to retrieve data from and save data to database servers and external systems respectively.

In some circumstances, the system might be required to retrieve data from and save data to a system whose primary interface is designed to be browser-based. For example, a partner server might be required to retrieve price and availability data from an e-commerce system that is designed to provide the same information to customers through a browser.

In these settings, the Comergent eBusiness System emulates a browser by posting a request to the e-commerce Web server and then the Comergent eBusiness System parses the response to recover the data provided by the e-commerce system. The response is in the form of an HTML message that provides name-value pairs.

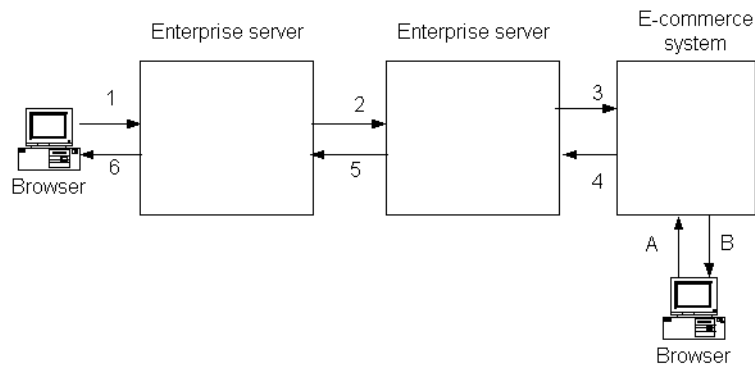


FIGURE 24. Comergent eBusiness System Emulation of Browser Interface

For example, consider Figure 24 on page 342. Suppose that a distributor has an e-commerce system that provides a browser-based interface to customers. A customer points their browser to the e-commerce system and posts their request to the system (A). The e-commerce system responds by returning a Web page to the customer's browser (B).

Now suppose that this distributor is part of a Comergent eBusiness System network. When a customer initiates a price and availability request from their browser (1), the enterprise server dispatches a price and availability request to the enterprise server at the distributor's site (2). Using the `HTMLService` class, the data layer of the partner's enterprise server posts a request to the e-commerce system (3). The e-commerce system returns a response (4) providing the data requested. In turn, the partner's enterprise server returns the data to the enterprise server (5), and finally the enterprise server returns a new Web page to the customer (6).

HTMLService Class

Like the `MsgService` and `JDBCService` classes, the `HTMLService` class is designed to provide data layer integration with external data sources. If the `DataSource` associated to a business object specifies the `HTMLService` class in its `DataService` attribute, then the `HTMLService` class is invoked whenever the `restore()` or `persist()` methods are called on the business object.

The `HTMLService` class extends the abstract `DataService` class. It posts a request to the e-commerce system, and uses a series of parsing methods to recover the name-value pairs provided in the HTML response.

Formats of Request and Response

This section describes the structure of the requests and responses used by the HTMLService class.

Post Request

The typical form of the post is:

```
http://<server>:<port>/<location>?param1=value1&param2=value2...
```

Here, server, port, and location are determined at implementation. The location specifies the entry point to the e-commerce system. For example, an active server page-based system might provide a URL of the form:

```
http://<server>:<port>/login.asp?param1=value1&param2=value2...
```

whereas a servlet-based e-commerce system might provide a URL of the form:

```
http://<server>:<port>/LoginServlet?param1=value1&param2=value2...
```

The parameters that are passed to the e-commerce system must provide sufficient information for the request to be processed correctly. These are defined in the specification of the interface as described below (see "Interface Specification" on page 344).

HTML Response

For the HTMLService class to retrieve data from the HTML response, the returned page must conform to the following format:

```
<HTML>
  <BODY>
    Name1=Value1;
    Name2=Value2;
    Name3=Value3;
    Name4=Value4;
  </BODY>
</HTML>
```

Here, the name-value pairs are listed on a separate line terminated by a semi-colon (;). Both Name and Value are strings that must be separated by an equal sign (=).

The returned name-value pairs must be defined in the interface specification and must be sufficient to determine a valid response (see "Interface Specification" on page 344).

Interface Specification

To ensure that the HTMLService class performs correctly, you must specify the location and parameters used in each post and the name-value pairs that must be returned in response to each request.

The specification is provided by a properties file and is read at the time the Comergent eBusiness System is started. Each time the HTMLService class is invoked the appropriate parameters must be defined by the business object.

A typical table to specify the interface might look something like Table 26, "Sample HTMLService Interface Specification", on page 344:

TABLE 26. Sample HTMLService Interface Specification

Function	Request	Response
Regular Login	USER_ID=userid PASSWORD=password	STATUS_CODE=statusCode STATUS_MESSAGE=status-Message SESSION_ID=sessionId
Referral Login	USER_ID=userid DISTI_SESSION_ID=distiSession-Id	STATUS_CODE=statusCode STATUS_MESSAGE=status-Message SESSION_ID=sessionId
Price and Availability	SESSION_ID=sessionId MARKET_TYPE=marketType CURRENCY_CODE=requested-CurrencyCode SKU_AUTHORITY=manufacturerId SKU=manufacturerSKU QUANTITY=quantity	STATUS_CODE=statusCode SELLER_SKU=distributorSKU AVAILABLE_QUANTITY=quantity LIST_PRICE=listPrice PRICE=discountedPrice CURRENCY_CODE=reply-CurrencyCode

TABLE 26. Sample HTMLService Interface Specification (Continued)

Function	Request	Response
Shopping Cart Reference	SESSION_ID=sessionId BUYER_SHOPPING_CART_ID=manufacturerShoppingCartId	STATUS_CODE=statusCode STATUS_MESSAGE=status-Message SELLER_SHOPPING_CART_ID=distributorShoppingCartId
Add Shopping Cart Item	SESSION_ID=sessionId SELLER_SHOPPING_CART_ID=distributorShoppingCartId MARKET_TYPE=marketType CURRENCY_CODE=requested-CurrencyCode SKU_AUTHORITY=manufacturerId SKU=manufacturerSKU QUANTITY=quantity	STATUS_CODE=statusCode SELLER_SKU=distributorSKU WAREHOUSE_LOCATION=location LIST_PRICE=listPrice PRICE=discountedPrice CURRENCY_CODE=reply-CurrencyCode

For example, to add a shopping cart item using this interface successfully, the HTMLService class might post a URL that looked like this:

```
http://<server>:<port>/<location>?SESSION_ID=df7686089&
SELLER_SHOPPING_CART_ID=35&MARKET_TYPE=Education&
CURRENCY_CODE=USD&SKU_AUTHORITY=Matrix&SKU=MXWS-7600&QUANTITY=5
```

In response, the server might return a page similar to this one:

```
<HTML>
<BODY>
  STATUS_CODE=0000;
  SELLER_SKU=DXWS-7600;
  SKU_AVAILABLE_QUANTITY=67;
  LIST_PRICE=1999.95;
  PRICE=1675.00;
  CURRENCY_CODE=USD;
</BODY>
</HTML>
```

The **C3 Pricing** application manages both user access to products and the assignment of prices to products. It uses price lists to set prices for products and then by associating price lists with partners determines the products that may be seen by partner users. See the *Comergent eBusiness System Administration Guide* for a detailed conceptual introduction to price lists.

This chapter covers the possible changes you may make to **C3 Pricing**:

- Changing the list of currencies or customer types (formerly known as vertical markets)
- Implementing a Pricing Engine
- Using C3 Pricing for Entitlement Only
- Implementing New Pricing Rule Variables

C3 Advisor Pricing

Note that pricing information displayed to users as they browse the product catalog can either be displayed using the pricing engine or by directly querying the Knowledgebase tables. The **C3 Advisor** business rule called **Apply Dynamic Pricing to Product List** controls this behavior:

- on: the pricing engine is used to retrieve prices.
- off: pricing data is retrieved from the Knowledgebase tables directly.

Price Lists

Each price list comprises:

- Header information: the name of the price list, its description, the customer type and currency for the price list, status, and effectivity dates for the price list.
- Products: a list of products on the price list.
- Rules: rules are associated with product categories and products to modify specific prices based on runtime attributes of the partner user or the quantity of a product.

Header Information

When a price list is created, the pricing administrator specifies the name of the price list and sets effectivity dates for the price list. Each price list name must be unique.

In addition, the administrator specifies the customer type (vertical market) and currency for the price list by selecting values from drop-down lists. The available values for the customer types drop-down list are populated from the CMGT_VERTICAL_MARKETS table. The available currencies for the currencies drop-down list are populated from the CMGT_CURRENCIES table.

In both cases, to manage the available options, make sure that when you first populate these tables, you create all the values you want your implementation to support. See CHAPTER 6, "Creating and Populating the Knowledgebase" for more information about populating the tables. See the *Comergent eBusiness System Reference Guide* for more information about the Knowledgebase tables.

Rules

Each pricing rule comprises two parts:

- rule variables: these are the variables that determine whether or not a particular rule should be applied.
- adjustment factors: these are the discounts or surcharges that are to be applied to the price if the rule is applicable. These are expressed either as absolute amounts or as percentages of the price.

Rule Variables

A rule variable is any field that can be evaluated at runtime and whose value can be compared to a pre-defined set of values: we refer to these as the rule variable options. Each pricing rule variable that is defined as part of your implementation appears as a selectable item in the First Option and Second Option drop-down lists on the Pricing Rule Administration pages. See the *Comergent eBusiness System Administration Guide* for details of the Pricing Rule Administration pages.

As part of your implementation of the Comergent eBusiness System, you must decide what pricing rule variables to create and what options each rule variable can offer. See "Implementing New Pricing Rule Variables" on page 351 for more information.

In general, you should limit your choice of pricing rule variables to fields that will be used to adjust prices displayed to customers. Each pricing rule variable is defined in the PricingRuleVariableDefinition Java class. You should avoid having to modify this frequently because new variables will only be used when the servlet container is restarted.

Definition of a Pricing Rule Variable

Each pricing rule variable has the following member variables that must be properly defined to assure proper usage of the pricing rules. The first five entries in the following table comprise the header for the pricing rule variable.

TABLE 27. Defining Elements of a Pricing Rule Variable

Defining Element	Description
ID	ID of the pricing rule variable.
Definition	Type of data source. See "Sources of Pricing Rule Variables" on page 353.
Description	Description of the rule variable (option visible in the drop-down list).
Type	Input type (possible choices) for a variable, including string values, numbers, or number ranges.
OptionNo	Total number of possible choices for each variable.
Option	Choices for each variable. Comprises a definition including an ID starting from "1", a name that must match the entry of a data source, and a description that is displayed on the administration pages.

Implementing a Pricing Engine

The Comergent eBusiness System provides a pricing engine to retrieve pricing and entitlement data from the Knowledgebase. It is called from the main pricing class PriceCheckAPI and instantiated using the PricingSourceFactory class. You can implement your own pricing engine class as follows and use it for either or both of pricing and entitlement checking.

Follow these steps to create your own pricing engine:

1. Write the Java class for the pricing engine. Any pricing engine class must implement the `com.comergent.api.apps.pricingMgr.PricingSource` interface. This interface provides a number of similar methods used to check prices. Note that the class should assume that the PriceCheckAPI class has retrieved from the user's session whatever information is required (such as partner key, customer type, and currency) prior to invoking a `checkPrice()` method.
2. Modify the **ObjectMap.xml** file by changing the element whose ID attribute declares the pricing engine:

```
<Object ID="com.comergent.apps.pricingMgr.pmComergent.core.-
    PricingEngine">
    <ClassName>com.comergent.apps.pricingMgr.pmComergent.core.-
        NewPricingEngine</ClassName>
</Object>
```

3. If you plan to use the pricing engine only for entitlement checking, then see "Using C3 Pricing for Entitlement Only" on page 350. If the pricing engine is to be used for entitlement checking, then it must implement the `com.comergent.api.apps.pricingMgr.EntitlementSource` interface and its `checkEntitlement()` method.

Note that you can use a combination of pricing engines, one for pricing and one for entitlements, or you can use the same for both.

Using C3 Pricing for Entitlement Only

It is possible to implement Comergent eBusiness System so that the price lists are used to manage the access users have to products (known as entitlement checking), but not to serve pricing information. If you do this, then you must create an external pricing engine that does provide pricing information. See "Implementing a Pricing Engine" on page 350. This section covers the steps you perform to implement this feature.

1. Using the Business Rule Administration page, set the Pricing Engine Type to “Entitlement Only”. This has the effect of setting the value of the `pricingEngineMode` element in the **BusinessRules.xml** file to “2”.
2. For the external pricing engine, create a Java class that implements the `PricingSource` interface.
3. Modify the **ObjectMap.xml** file by changing the elements whose ID attributes declares the pricing engine to be used for entitlement and the external pricing engine to be used for pricing:

```
<Object ID="com.comergent.apps.pricingMgr.pmComergent.core.-
    PricingEngine">
    <ClassName>com.comergent.apps.pricingMgr.pmComergent.core.-
        NewPricingEngine</ClassName>
</Object>
<Object ID="com.comergent.apps.pricingMgr.pmComergent.core.-
    ExternalPricingEngine">
    <ClassName>com.comergent.apps.pricingMgr.pmComergent.core.-
        NewPricingEngine</ClassName>
</Object>
```

By default, you can leave the internal pricing engine to point to the standard `PricingEngine` class: its `checkEntitlement()` method can still be called. However, if you choose to point to a different pricing engine, then make sure that it implements the `checkEntitlement()` method.

Note that these steps will only provide the functionality that you need if your external pricing source uses the same (or less) information to determine pricing for products. If your external pricing source uses different or more complex information in determining prices, then you will have to extend the `PricingSource` interface to support methods that enable this information to be used to retrieve prices. You will also have to modify the `PricingSourceFactory` class to return the new interface and the application classes that access pricing to invoke these new methods.

Implementing New Pricing Rule Variables

This section describes how to go about creating a pricing rule variable. You must have access to the Comergent eBusiness System source tree to do this.

Modifying `PricingRuleVariableDefinition`

Using your preferred text editor or Java development application, open the Java source file **`PricingRuleVariableDefinition.java`** to be found in the `com.comergent.apps.pricingMgr.pmComergent.core` package.

Modify the *getRules()* method to define the set of rule variables that you want to use. Each rule variable is created with the same basic code:

```
// Definition of Rule Variable
rule = new PricingRule();
rule.setDateFormat(format);
rule.setID(counter++);
// ID is the key stored in CMGT_PRICELIST_LINES-RULE_VARIABLE
rule.setDefinition("BusinessObject.Field"); // Source location
rule.setDescription(rb.getString("Description")); // Description
rule.setType(PricingEngineConstants.Type);
/**
    Code to set rule options
*/
rules.add(rule);
}
```

In general, you can leave the date format unchanged. The ID of the rule, set through the *setID()* method, simply assigns a number to the rule. Rule ID numbers must be unique and consecutive.

The *setDefinition()* method is used to specify what attribute of the business objects should be used to compare values against the value set in the rule. For example, if you set the definition to be “Partner.PartnerType”, then the value of the user’s partner type is compared to the value set in the rule.

setDescription() is used to determine what is displayed to administrators in the price list rule editor page. The *setType()* method simply sets the type of the data to be compared.

The code that adds the possible values of the rule options will depend on the source of the pricing rule variable. In general, the values will usually come from one of these sources:

- Values retrieved from CMGT_LOOKUPS
- Values retrieved from another Knowledgebase table such as CMGT_TERRITORIES
- Values set in the code that creates the rule variable

Add each option to the rule with the method *setOption()* which takes three arguments:

- its index as an int
- its name as a String
- a description as a String

Sources of Pricing Rule Variables

The following types of data sources are supported as rule variables:

- Fields in a partner profile (for example, partner level, partner territory, and so on). The data object, **Partner.xml**, contains the variable definitions.
- Quantity of a line item assigned to a product inquiry list business object, a pricing and availability business object, a price check business object, or an internal pricing application program interface (API).

Examples

In this section we provide some examples of how to modify the `PricingRuleVariableDefinition` class to add new pricing rule variables.

Data Source from Partner Business Object and a String Input Type

The following code fragment demonstrates how to define a pricing rule variable that contains a partner business object data source and a string input type:

```
// Definition of Rule Variable
rule = new PricingRule();
rule.setDateFormat(format);
rule.setID(counter++);
rule.setDefinition ("Partner.MemberLevel");
rule.setDescription(rb.getString("Partner Membership Level"));
rule.setType(PricingEngineConstants.VARIABLE_TYPE_DISCRETE_STRING);
lookupType = I18NOkayConstants.STRING_PARTNER_LEVEL;
v = getLookup(lookupType);
if (v.size() > 0)
{
    String[] s = getLookupDescription(v);
    rule.setOptionNo(v.size()); // total number of possible options
    for (int i=0; i<v.size(); i++)
    {
        rule.setOption(i+1, s[i], s[i]);
    }
    rules.add(rule);
}
```

It does the following:

1. Declares a new pricing rule variable.
2. Sets date format to MM/dd/yyyy:HH:mm:ss.

3. Sets ID to an integer number.
4. Sets definition as “Partner.MemberLevel”. This is the field that is compared to the values generated below.
5. Sets description as “Partner Membership Level”. This is the text that is visible to a price list administrator.
6. Sets the type as
“PricingEngineConstants.VARIABLE_TYPE_DISCRETE_STRING”, a
pre-defined string constant.
7. Loop through the possible lookup tables for all options. The *getLookup()* method retrieves a vector of values from the CMGT_LOOKUPS table whose LOOKUP_TYPE is “member_level”. For each option, add the option to the rule.
8. Add the rule variable to the vector of rules.

Data Source from Business Objects and a Number Range Input Type

The following code fragment demonstrates how to define a pricing rule variable that contains a business object data source and a number range input type:

```
// Definition of Rule Variable
rule = new PricingRule();
rule.setDateFormat(format);
rule.setID(counter++);
rule.setDefinition("LineItem.Quantity");
rule.setDescription(rb.getString("Ranged Quantity"));
rule.setType(PricingEngineConstants.VARIABLE_TYPE_NUMBER_RANGE);
rule.setOptionNo(4);
rule.setOption(1, "1-5", rb.getString("1-5 items"));
rule.setOption(2, "6-9", rb.getString("6-9 items"));
rule.setOption(3, "10-29", rb.getString("10-29 items"));
rule.setOption(4, "30->", rb.getString("more than 30 items"));
rules.add(rule);
```

1. Declares a new pricing rule variable.
2. Sets date format to MM/dd/yyyy:HH:mm:ss.
3. Sets ID to an integer number.
4. Sets definition as “LineItem.Quantity”.
5. Sets description as “Ranged Quantity”.

6. Sets the Type as
“PricingEngineConstants.VARIABLE_TYPE_NUMBER_RANGE”, a
predefined string constant.
7. Sets the variable option number to four.
8. Sets each option by giving the index, range, and a description of the range.

Customized Data Source and a Number Range Input Type

If you want to create a pricing rule using a customized data source, then see your Comergerent representative or Comergerent-authorized representative.

Testing the Comergent eBusiness System

This chapter provides a description of the tests that you can perform once implementation is complete.

Starting the Comergent eBusiness System Server

In general, you can start the Comergent eBusiness System by starting the servlet container in which the Comergent eBusiness System is installed. The order in which the servlets load is specified in the Comergent eBusiness System Web application **web.xml** file and you can read this file in any text editor.

As the Comergent eBusiness System starts, the servlet console window displays preliminary logging information. Once the Comergent eBusiness System has initialized its logging environment, then it uses the logging methods to record events. See CHAPTER 9, "Managing Comergent eBusiness System Logging" and the *Comergent eBusiness System Developer Guide* for more information about the logging capabilities of the Comergent eBusiness System.

Troubleshooting

This section covers some basic steps that you must perform to ensure that the system starts correctly. This list is not comprehensive; rather it covers some check points that are a common source of problems. In general, you should troubleshoot

your installation using the SDK to ensure that any modifications you make are contained in your project directory. See the *Comergent eBusiness System Developer Guide* for more information about the SDK and its targets.

To Perform Pre-startup Checks

1. Review the **prefs.xml** configuration file. Check that it is in the correct location as this is the most frequent cause of problems on startup. Remember:
 - a. By default, the location of this file is assumed to be **user_home/cmgt/debs/conf/** where **user_home** is the home directory for the operating system user running the servlet container.
 - b. This location can be overridden by:
 - Either: specifying the location of the file as a system property:

```
-Dcomergent.preferences.store=/path/prefs.xml
```
 - Or: specifying its location using the `comergent.preference.store` parameter in the Comergent eBusiness System **web.xml** configuration file:

```
<init-param>
  <param-name>comergent.preferences.store</param-name>
  <param-value>/path/prefs.xml</param-value>
</init-param>
```
2. Review the **Comergent.xml** configuration file. Check that:
 - It contains the value of system properties that you expect to see (or that are overridden by the **prefs.xml** configuration file).
3. Using the SDK, run the generateDTD target.
 - If you get a series of lines of the form: "Writing DTD for ACL...done!", then the DTDs have been successfully generated. Look in the **debs_home/Comergent/WEB-INF/bizobjs/** directory to verify that a complete set of DTDs are there.
 - If you get an error message, then review the steps outlined above.

See "Data Objects" on page 130 for more information.
4. Using the SDK, run the generateBean target. This should generate all the beans specified by the data objects. If you see any error messages, then you should fix their cause before proceeding.

5. Using the SDK, run the merge target. If this runs successfully, then run the dist target to generate the Web application WAR file.

Error Messages on Startup

When the Comergent eBusiness System starts, you can see initialization information in either the console window or the servlet container log file. See CHAPTER 7, "Troubleshooting and Backing Up the Comergent eBusiness System" for a summary of the most likely error messages, together with their causes and how to resolve them.

To troubleshoot problems with message types, you can set the `messageTypeValidate` element in the **Comergent.xml** file to "TRUE".

Runtime Troubleshooting

This section covers some problems identified during testing.

TABLE 28. Troubleshooting Problems and Solutions

Problem	Solution
JRun on Solaris runs very slowly.	<ol style="list-style-type: none"> 1. Stop JRun server. Use 'ps' to make sure that no JRun instance is running. 2. Navigate to the debs_home directory, say: <code>cd /opt/jrun/servers/default</code> 3. Enter: <code>mv Comergent/WEB-INF/lib/*.jar lib/</code> 4. Restart JRun. <p>You will need to do this each time you deploy a new Comergent app since the new app will put back the *.jar files in debs_home/Comergent/WEB-INF/lib/.</p> <p>In addition, review the memory settings, specified in the javargs parameter. If possible, increase the minimum setting to 256M.</p>
On Solaris, the server seems to hang too frequently.	<p>There is a dead-lock condition when a certain JRun log level is enabled. Try this work-around:</p> <ol style="list-style-type: none"> 1. Stop JRun. Use 'ps' to make sure that no JRun instance is running. 2. Navigate to the debs_home directory, say: <code>cd /opt/jrun/servers/default/</code> 3. Edit the file local.properties. Change the line <code>logging.loglevel={default}</code> to <code>logging.loglevel=warning,error</code> 4. Restart JRun.

TABLE 28. Troubleshooting Problems and Solutions (Continued)

Problem	Solution
<p>Running JRun on Solaris, I am getting too many open files error.</p> <pre>001.02.22 12:05:33:941 Env/ jcp-2 Request=PageLoader java.io.FileNotFoundException: /opt/jrun/servers/ default/Comergent/common/Full- PageLoader.jsp (Too many open files)</pre>	<p>Edit the file <i>container_home/bin/jrun</i> to add the following line:</p> <pre># Increase the open file setting ulimit -n 1024 after the first set of comments.</pre> <p>For example, the start of the script should now look something like this:</p> <pre>#!/bin/sh # # jrun - start a new JVM and # instantiate a class # # Usage: # See usage function below. # # Limitations: # each evaluation. \\a -> \a -> a # 1 line continuation characters # could also be # easily supported. # # Increase the open file setting ulimit -n 1024</pre>
<p>I am getting the following error:</p> <pre>java.net.BindException: Port in use by another service or process: 53000</pre>	<p>This error indicates that another process has already opened port 53000.</p> <p>In most cases, you will get this error when your previous JRun instance failed unexpectedly and could not completely clean itself up.</p> <p>On UNIX, use the <code>ps</code> command to look for such a process and kill it manually using <code>kill</code> command.</p> <p>On Windows, use the Task Manager to look for a java process and try to stop it. Most often it will not work and you will have to reboot windows to clear the port.</p>

TABLE 28. Troubleshooting Problems and Solutions (Continued)

Problem	Solution
I am getting an error of OutOfMemoryException.	<p>For server operation, the default setting of the java VM is often insufficient. To increase the VM memory setting:</p> <ol style="list-style-type: none"> 1. Stop JRun. 2. Using the JRun administration tool, look for: Default Server -> Java Setting -> Java Args 3. Set the value to -Xms256M -Xmx512M. 4. Restart JRun.
On Solaris, the servlet container cannot find a certain servlet or URL.	<p>First make sure that you did not make a typo. If you are certain that there was no mistake, then do the following:</p> <ol style="list-style-type: none"> 1. Run the following command on web.xml: java com.comergent.dcm.util.CheckWebXML web.xml > newWeb.xml 2. Edit the file newWeb.xml. Look for the following string <pre><!-- (8192) XXX BOUNDARY BREAK --></pre> <p>The start of the comment <!-- is the start of a 8192 boundary break. If it falls within a value for an XML node, then that node will get truncated.</p> <p>A work around is to pad the web.xml file such that the boundary break will fall inside a comment. For more information, see the comments at the start of file CheckWebXML.java.</p>

TABLE 28. Troubleshooting Problems and Solutions (Continued)

Problem	Solution
<p>You may have trouble re-starting Apache Web server after setting up the External Connection from JRun to Apache. If you get the following error:</p> <pre># bin/apachectl start Syntax error on line 953 of /usr/local/apache/conf/httpd.conf: Invalid command 'LoadModule', perhaps mis-spelled or defined by a module not included in the server configuration bin/apachectl start: httpd could not be started</pre>	<p>This error message indicates that the Apache server lacks support for DSO (Dynamic Shared Objects). The quickest way to fix this problem is:</p> <ol style="list-style-type: none"> 1. Save the current Apache installation directory. For example: <pre>cd /usr/local mv apache apache.noDSO</pre> 2. Re-compile from source (get a copy from http://httpd.apache.org/). <pre>./configure --enable-shared=max make make install</pre> 3. Verify that the newly compiled Apache has the DSO support: <pre># cd /usr/local/apache # bin/httpd -l Compiled-in modules: http_core.c mod_so.c suexec: disabled; invalid wrapper /usr/local/apache/bin/suexec The important line is the one contains "mod_so.c".</pre> 4. Run a quick sanity check: <pre># bin/apachectl configtest Syntax OK</pre> 5. Now copy the Jrun section of the "old" httpd.conf to the "new" httpd.conf. 6. Re-run the sanity check: <pre># bin/apachectl configtest Syntax OK</pre> 7. Start the server: <pre># bin/apachectl start bin/apachectl start: httpd started</pre>

TABLE 28. Troubleshooting Problems and Solutions (Continued)

Problem	Solution
<p>After updating JRun 3.0 to SP2, if you start JRun, and see the event.log shows the following error:</p> <pre>04/09 11:04:37 info (JRun) Loading jms 04/09 11:04:37 error (JRun) JRun Aborting!</pre>	<p>JRun tried to start a 'jms' service which is not defined. Since the Comergent eBusiness System does not use 'jms', you can just disable that service:</p> <ol style="list-style-type: none"> 1. Edit the file <i>debs_home/local.properties</i> as follows: Change the line <code>ejb.services=ejb,jms</code> to <code>ejb.services=ejb</code> 2. Restart JRun.
<p>On the Matrix home page, all the URL links have 255.255.255.255. as the host name.</p>	<p>JRun sometimes has a problem figuring out the correct server name when the Comergent eBusiness System asks it to build up each URL. To fix this:</p> <ol style="list-style-type: none"> 1. Edit the file <i>debs_home/Comergent/WEB-INF/properties/Comergent.xml</i> by finding the tag <code><ServerName></code>, and changing the value from 127.0.0.1 to the actual server name (either hostname or IP number will work). 2. Restart JRun.
<p>Using JDK 1.2.2_06 on Solaris with JRun 3.0, users experience hang condition and OutOfMemoryExceptions. Running under -verbose:gc shows increasing memory usage trend.</p>	<p>Upgrade the JDK used with JRun to JDK 1.3. For additional information, contact Comergent support.</p>

TABLE 28. Troubleshooting Problems and Solutions (Continued)

Problem	Solution
<p>You see parser errors such as:</p> <pre>java.lang.NoSuchMethodError at org.apache.xpath.DOM2Helper.ge tNamespaceOfNode (DOM2Helper.java:348) at org.apache.xml.utils.Tree- Walker.startNode (Tree- Walker.java:281) at org.apache.xml.utils.Tree- Walker.traverse (Tree- Walker.java:119) at org.apache.xalan.trans- former.TransformerIdentity- Impl.transform (TransformerIdentity- Impl.java:320)</pre>	<p>Check that you have followed the instructions to copy the XML parser-related JAR files to the servlet container's lib/ directory, and that you have removed any default parser.jar files.</p>
<p>Running iPlanet, you see the following in your browser:</p> <pre>GX Error (GX2GX) socket result code missing!!!</pre>	<p>There is a mismatch between the web.xml and ias-web.xml files. All servlets mentioned in web.xml must have a corresponding entry in the ias-web.xml file. Use the kguidgen utility to generate a GUID for the servlet.</p>

Communication Between Enterprise Servers

In testing whether an enterprise server can send price and availability requests and product inquiry list transfer requests to another enterprise server installed at a partner, check for the following problems:

- Determine if the Message URL defined in the partner profile is correct.
 - On the enterprise server side, you can view the Message URL in the partner profile detail page: check that both the host name and port of the partner's enterprise server are correct. If it is correct, then check that the NamingManager entries of the **Comergent.xml** file connect to the same database specified in the **DataSources.xml** file.
 - If you see a message in the enterprise server log of the form:


```
XML message does not conform to the PriceAvailability.dtd
```

 then check the **debs_home/Comergent/WEB-INF/bizobjjs/** directory to see that the correct DTDs are present.
 - If you see an error displayed in the enterprise server browser window of the form:

ProcessingFailure

then the partner's enterprise server received the price and availability request, but for some reason failed to process it correctly.

On the partner side, by looking at the log or console window, check that the partner's enterprise server receives price and availability requests from the enterprise server.

2. If the partner's enterprise server shows no sign of receiving a price and availability request that you initiate from the enterprise server, then:
 - *Either* the Message URL is incorrect or it is not retrieved correctly through the NamingManager.
 - *Or* a network problem is preventing the enterprise server from connecting to the partner's enterprise server. From your enterprise server, point a browser to the partner's Message URL: if you cannot obtain a response from the partner's enterprise server, then a network problem is preventing the two enterprise servers from communicating.
3. If the partner's enterprise server log or console window indicates that the price and availability request has been received, but an error is generated in processing the request, then you should check that the partner's enterprise server has correct DTDs in its *debs_home/Comergent/WEB-INF/bizobjjs/* directory.

Release 7.0.2 provides the capability to run the **C3** Configurator in a “mobile” mode. Users who install the Mobile Configurator on their laptop computer can configure models and save the configured models. They can subsequently synchronize their configured models back to the online Comergerent eBusiness System, and then complete placing orders for the configured products.

This chapter covers the steps that must be followed on the online Comergerent eBusiness System to set up support for the Mobile Configurator, and the steps that mobile users perform to install the Mobile Configurator on their laptops:

- "Installing the Online Component" on page 367
- "Installing the Mobile Configurator" on page 369

Installing the Online Component

Follow these steps to set up the Online Component of the Mobile Configurator:

Install the Online Component into the SDK

1. Copy the **ComergerentMobile.jar** file to a temporary location (referred to here as *temp_home*) on your SDK system. The full file name will be something like: **ComergerentMobile-def-7_0_1-RC-x-y.jar**, where x and y will depend on the release.

1. At the command line, navigate to the *sdk_home* directory.
2. Enter the command to install the ComergentMobile.jar:

```
sdk install temp_home/ComergentMobile-def-7_0_1-RTQA-6-15.jar
```
3. Enter the command to create a new project. You can use any name for the project: we refer to this as *project_name*:

```
sdk newproject project_name
```
4. Build the project by entering:

```
sdk merge -clean
```
5. Build the online component JAR file by entering:

```
sdk project release
```
6. Locate the built JAR file in the *sdk_home/dist/* directory: it is called *project_name.jar*.

Install the Built JAR file into the Online System

7. Copy this JAR file over to the machine on which the online Comergent eBusiness System is running.
8. On the online Comergent eBusiness System machine, log in as the user running the servlet container, and create a directory called: ***debs_home/Comergent/WEB-INF/data/synchmaster/***.
9. Unjar the built JAR file into the ***debs_home/Comergent/WEB-INF/data/synchmaster/*** directory.

Configure the Online System for Mobile Support

10. Log into the Comergent eBusiness System as an enterprise administrator.
11. Click **Business Rules**.
12. Click **Configurator**.
13. Set the Is Offline Configuration and Quoting Installed? business rule to true.
14. Click **Save All and Return to List**.

Enable Users for Mobile Access

15. Determine which users you want to provide mobile access for. For each such user, you must access their user profile and check the check box for Offline Access.

16. Save your change to their user profile.

Installing the Mobile Configurator

Follow these instructions to install the Mobile Configurator on your machine.

Requirements

The Mobile Configurator can be installed on any personal computer that meets the following requirements:

- Operating system: Windows 2000 or Windows XP
- Memory: 128 MB
- Hard drive space: 10 MB
- Java Development Kit: you must install the Sun Java Development Kit (JDK) Version 1.4.2 or subsequent compatible version.

To Install the Mobile Configurator

1. Identify a directory on your laptop machine which you will use for running the Mobile Configurator: we will call this directory ***mobile_home***.
2. Check that you have been enabled for mobile access to the Comergent eBusiness System.
3. Log in to the Comergent eBusiness System and scroll down the home page to the instructions in the Install the Offline Configuration and Quoting Tool panel.
4. Right-click the link to **synchro.jar** and download the file to the ***mobile_home*** directory.
5. Run the **Launcher** application:
 - If you have set up JAR files to be associated with the Java application that comes with your JDK, then you can use Windows Explorer to navigate to the ***mobile_home*** directory, and then double-click the **synchro.jar** file.
 - Alternatively, at the command line, navigate to the ***mobile_home*** directory and run:

```
java -jar synchro.jar
```
6. The Setup window is displayed.

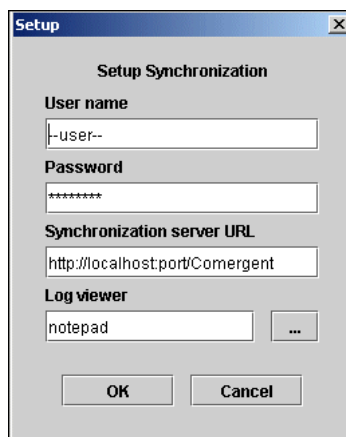


FIGURE 25. Setup Window

7. Enter your username and password that you use to log into the online Comergent eBusiness System.
8. Enter the Synchronization URL as it is displayed to you in the Install the Offline Configuration and Quoting Tool panel.
9. Optionally, specify an application to view the log file for the Mobile Configurator.
10. Click **OK**.
11. The Synchronization Required window is displayed. Click **Yes**.
12. Once synchronization is complete, you are prompted to quit the application and restart it.
13. When it restarts, the Launcher application will again prompt you to synchronize files, so click **Yes**.
14. The Synchronization - Progress window displays progress as it synchronizes files and data between the online Comergent eBusiness System and your Mobile Configurator.
15. When synchronization completes, a dialog box tells you this. Click **OK**.
16. The Launcher window is displayed.



FIGURE 26. Launcher Window

17. Click **Launch**. A browser window is opened and the Mobile Configurator home page is displayed.

If you see the Mobile Configurator home page, then you have successfully installed Mobile Configurator.

Troubleshooting

Problems During Installation

If the installation program fails to find your installation of the JDK, then make sure that you have the following environment variables set to correctly point to the location of the JDK: JAVA_HOME and JDK_HOME. Typically, their values should be set to something like “C:\jdk1.4.2_08”.

1. On your Windows desktop, right-click the My Computer icon and select Properties.
2. Click the Advanced tab.
3. Click **Environment Variables...**

4. In the User variables section, click **New...**
5. In the Variable Name field, enter "JAVA_HOME".
6. In the Variable Value field, enter the directory location of the JDK.
7. Click **OK**.
8. Click **OK**.
9. Click **OK**.

Problems After Installation

If the Mobile Configurator fails to start up when you click **Launch** from the Launcher window, then check that you do not have a server process already listening on port 8080. If you do, then you must either stop this server process or modify the port at which the Mobile Configurator listens. You can modify the **server.xml** file in the *mobile_home/jakarta-tomcat-5.5.9/conf/* directory by changing the value of the port attribute in this element:

```
<Connector
  className="org.apache.catalina.connector.http.HttpConnector"
  port="8080" minProcessors="5" maxProcessors="75"
  enableLookups="false" redirectPort="8443"
  acceptCount="10" connectionTimeout="60000" debug="0"
  scheme="http" secure="false"/>
```

Loading Models and Prices

In order to configure models using the Mobile Configurator, you must load the XML files for each model and the pricing information to be used with your Mobile Configurator on your machine. Typically, this task is performed as part of a "synchronization" with an existing installation of the Comergent eBusiness System.

This synchronization process can be initiated by starting the Launcher application, and then click **Synchronize**.

This chapter describes how to set up the Comergent eBusiness System in a clustered environment. It covers:

- "Setting Up a WebLogic Cluster" on page 377
- "Setting Up a WebSphere Cluster" on page 383
- "Setting Up Macromedia ClusterCATS" on page 390

As well as following the steps described in one of the servlet container sections below, you should also set up the global cache using JavaSpaces. See:

- "Setting up a Database for Caching" on page 404
- "Setting up JavaSpaces for Caching" on page 405

General Steps

Terminology and Overview

The basic purpose of a cluster is to provide an environment that supports higher performance and reliability than a single machine can. Typically, a cluster comprises two or more member machines that from the outside world appear to work as one machine: when users submit a request to the cluster URL, they are not

aware of which machine in the cluster processes the request and returns the response.

The cluster URL is usually directed to a Web server that sits “in front” of the cluster: this Web server provides the entry point for users, and it is responsible for distributing the requests to cluster members as requests come in. The Web server acts as a load balancer and distributes requests using an algorithm to determine which cluster member machine should receive each inbound request.

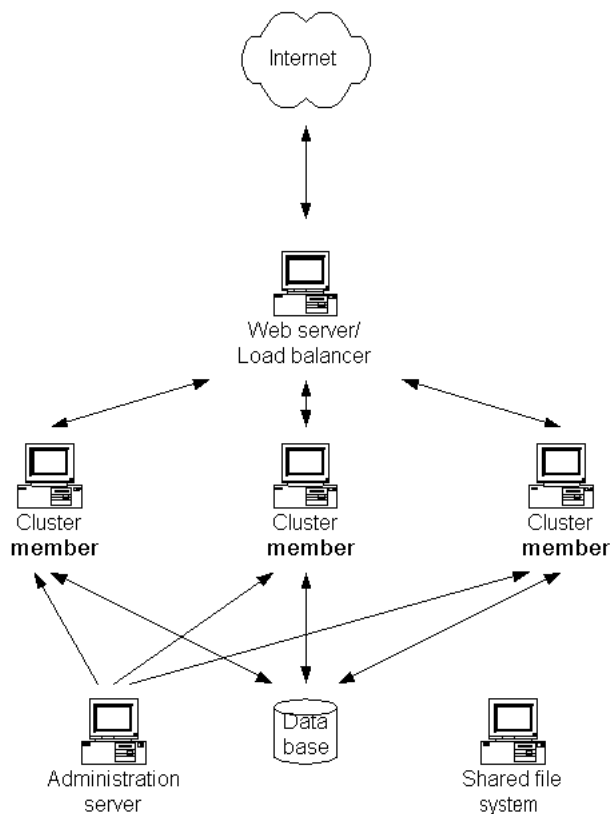


FIGURE 27. General Cluster Configuration

Administration Servers

In some cluster configurations, each cluster member is effectively independent of the others: you install the Comergent eBusiness System into each cluster member

and configure it independently of the other members of the cluster. Other cluster configurations make use of an administration server: this is a machine that manages the cluster: typically cluster members are registered with the administration server and the administration server maintains a single image of the Comergent eBusiness System: when a machine joins the cluster, the administration server pushes a copy of the Web application to the new cluster member. In this case, each cluster member has the same configuration information because it has been pushed to them from the administration server.

Shared Files

To ensure that cluster members behave consistently with each other, they must access configuration files, templates, image files that are common to all members of the cluster. Typically, you do this by establishing a shared file server and point to a common location on this file server.

- On UNIX systems, you can do this using an NFS file system. For example:

```
<context-param>
  <param-name>WritableDirectory.share.public.loadable
</param-name>
  <param-value>/usr/Comergent/shared</param-value>
</context-param>
```

- On Windows:
 - Either, on each cluster member you must map the same drive letter to the shared file server: then use the drive letter to provide a common reference to the location of the shared files. For example:

```
<context-param>
  <param-name>WritableDirectory.share.public.loadable
</param-name>
  <param-value>T:/Comergent/shared</param-value>
</context-param>
```

Here, the T: drive on each machine has been mapped to the C: drive on the file server machine.

- Or, use the UNC convention to refer to the shared directory location. For example:

```
<context-param>
  <param-name>WritableDirectory.share.public.loadable
</param-name>
  <param-value>\\fileserver\Comergent\shared</param-value>
</context-param>
```

Load Balancer

If you run your cluster using a load-balancing solution (either a hardware- or software-based solution), then make sure that the load-balancing is done in a session-sticky fashion. That is, all requests relating to a session should be handled by the same member machine in the cluster.

General Installation Instructions for Clustered Deployment

1. Depending on the cluster architecture, install the Comergent eBusiness System on each instance or into the Administrator server that deploys the Web application to the managed servers.
2. If you are using SQL Server as the Knowledgebase database server, then make sure that you set the `ServerId` system property and element of the **DataServices.xml** file to a unique two-digit value on each machine that make up the cluster. This ensures that generated keys are managed correctly. See "Support for SQL Server" on page 68 for more information.
3. If you are using 2-way encryption anywhere in the implementation, then follow these steps:
 - a. Make sure that you start one of the machines before the others.
 - b. Perform a persist operation that requires the use of 2-way encryption.
 - c. Identify the location of the **dcmsKey.ser** file on this machine and copy this file to the corresponding location on the other machines of the cluster. See "Storing Data in Encrypted Form" on page 173 for more information.
4. Follow the steps described in "Sharing Directories" on page 77.
5. Set the value of the `useSessionCaching` system property to "true". This property is in the **C3 Profile Manager** section of the system properties.
6. Copy the **prefs.xml** configuration file to a shared location which is visible to all member machines of the cluster. The location of the file must be specified in the startup script for each cluster member as follows:

```
-Dcomergent.preferences.store=<Path to prefs.xml>
```
7. Follow any remaining steps required by your servlet container or load balancer to implement their specific solution. See:
 - a. "Setting Up a WebLogic Cluster" on page 377

- b. "Setting Up a WebSphere Cluster" on page 383

Contact your Comergent Technologies representative for other clustering architectures.

Setting Up a WebLogic Cluster

You can use the clustering capabilities to set up a cluster of WebLogic Release 7.0 servlet containers to run your implementation of the Comergent eBusiness System. In general, you should follow the instructions provided by BEA Systems to set up the cluster. This section provides some additional information used to install the Comergent eBusiness System in the cluster.

Web Server

We suggest that you set up the cluster by placing a Web server or separate WebLogic Server as a front-end to the servlet container cluster. You should choose one of these options:

- Either set up a Web server with the appropriate WebLogic Web server plug-in. Supported Web servers include Apache and Microsoft Internet Information Server.

Note:	If you use Apache, then take care that your Apache release matches the mod_wl_20.so version. At this time of writing (October 2003), Apache 2.0.42 works with the current mod_wl_20.so provided by WebLogic.
--------------	--

- Or set up a WebLogic Server with the HttpClusterServlet Web application. The HttpClusterServlet maintains the list of all servers in the cluster, as well as the load balancing logic to use when accessing the cluster.

When the user's browser makes a request, the Web server or HttpClusterServlet proxies the request to the WebLogic Server cluster. See the WebLogic documentation for further details.

Administration and Managed Servers

Typically, a WebLogic cluster comprises an Administration Server and one or more Managed Servers. The Web applications are deployed into the Administration Server and then as Managed Servers start or join the cluster, the Administration Server deploys the Web applications to each Managed Server. Consequently, you must deploy the Comergent eBusiness System Web application **Comergent.war** file into the Administration Server first.

Note that when a Managed Server restarts, the Administration Server redeploys the Web applications to the Managed Server: this can take a considerable time, and so you should restart servers at times that ensure that they can be offline for the time they need to restart.

Preparation to Deploy the Comergent eBusiness System Web Application

Because the same WAR file is used to deploy to all cluster members, you must make sure that this WAR file is correctly configured before you deploy the WAR file to the Administration Server. In particular:

1. Make sure that you have used the SDK to build the deployment WAR file.
2. While using the SDK, make sure that the following configuration properties are correctly set:
 - a. **web.xml**: make sure that the WritableDirectory parameters are correctly set to point to the shared directory location. See "Common Directories" on page 380 for more information. Make sure that you have declared the SharedPublicServlet class as described in "SharedPublicServlet Class" on page 381.
 - b. **weblogic.xml**: make sure that you have added a **weblogic.xml** file to the **sdk_home/projects/project/WEB-INF/** directory. See the example file in "WebLogic Releases" on page 57. To support session-sharing across the cluster members, consider adding the element described in "Session Sharing" on page 382.
 - c. Make sure that you have correctly specified the database connection information in the appropriate properties file so that they are correctly set in the **prefs.xml** configuration file.
3. Build the **Comergent.war** file using the SDK distWar target.
4. Copy the **prefs.xml** configuration file to a shared location which is visible to all member machines of the cluster. The location of the file must be specified in the startup script for each cluster member as follows:

```
-Dcomergent.preferences.store=<Path to prefs.xml>
```

Deploying the Comergent eBusiness System Web Application

Follow these steps to deploy the Comergent eBusiness System Web application into the cluster. These instructions assume that you have set up the cluster using the WebLogic administration console on the Administration Server: we refer to the name of the cluster as *cluster_name*. We also assume that the managed servers are up and running. Make sure that you have used the SDK to create the

Comergent.war file and that you have moved a copy of the file to a location on the Administration Server.

1. Log into the administration console of the WebLogic Administration Server.
2. Click **Servers** and verify that the managed servers are listed.
3. Click **Clusters** and verify that the name of the target cluster is *cluster_name*.
4. Click **Deployments -> Web Application Modules**.
5. Click **Deploy a new Web Application Module**.
6. In the next window, navigate to the location of the **Comergent.war** file and select the radio button next to the **Comergent.war** file name.
7. Click **Target Module**.
8. Check the check box next to the cluster named *cluster_name*. By default, the **All servers in the cluster** radio button is selected. You should usually leave this setting unchanged.
9. Click **Continue**.
10. Select the radio button **Copy this Web Application module onto every target for me**. You can leave the name set as “Comergent” or change this to another name.
11. Click **Deploy**.

Deployment can take ten to twenty minutes. At the end of the deployment process, a page displays a Success message.

SQL Server

Because more than one deployment of the Comergent eBusiness System is accessing the same Knowledgebase on SQL Server, then you must set a two-digit server ID for each deployment. You must modify the servlet container command or script that starts the servlet container on each machine so that a Java system property is set: `Comergent.DataServices.General.ServerId`. This should be set on each machine so that each has a unique value: 01, 02, and so on.

For example, in a Tomcat installation, you can modify the starting batch file to include:

```
set JAVA_OPTS=-DComergent.DataServices.General.ServerId=12
```

Cron Jobs

The Comergent eBusiness System distinguishes between system cron jobs and application cron jobs. Typically, system cron jobs are run without an associated user and run on every system in a clustered environment whereas application cron jobs must be run associated to a user and usually should be run only by one machine in a cluster.

To set this up, you must do the following:

1. Make sure that in the deployment WAR file, the value of the cronApps system configuration property is set to “system”.
2. For the one application server that should run application cron jobs, make sure that a system property is set as follows:

```
-DComergent.Cron.cronApps=both
```

For example, in a Tomcat installation, you can modify the starting batch file to include:

```
set JAVA_OPTS=-DComergent.Cron.cronApps=both
```

Note that how you do this will vary from one servlet container to another: see for example, "Command Line Settings" on page 388 for WebSphere instructions.

3. Set the value of the Cron Job URL system property to the value of the URL used to access the cluster: for example:

```
http://loadbalancer/Comergent/msg/matrix
```

Common Directories

All the Managed Servers in the cluster must be able to access the same directory locations in the file system: this is where configuration files, shared data files, and other related files such as pagination data is stored for the cluster. You must ensure that all members of the cluster access this location using the same directory paths.

The location of the shared directories is specified in the Comergent eBusiness System **web.xml** file using context parameter elements of this form:

```
<context-param>
  <param-name>WritableDirectory.share.public.loadable</param-name>
  <param-value>/tmp</param-value>
</context-param>
<context-param>
  <param-name>WritableDirectory.share.public.noloadable</param-name>
  <param-value>/tmp</param-value>
</context-param>
</context-param>
```

```

    <param-name>WritableDirectory.share.private.loadable</param-name>
    <param-value>/tmp</param-value>
</context-param>
<context-param>
    <param-name>WritableDirectory.share.private.noloadable</param-name>
    <param-value>/tmp</param-value>
</context-param>

```

See "Shared Files" on page 375 for the form that the values of these parameters can take. Note that by default, these elements are commented out: in this case, each instance of the Comergent eBusiness System Web application acts independently of the other instances in the cluster. All file accesses are performed locally on the machine running the Web application.

The following table summarizes which files should go where:

TABLE 29. Shared File Locations

Location	Purpose
share.public.loadable	Do not use.
share.public.noloadable	Image files and other files that should be accessible to Web servers to serve up static content. Examples include GIF files associated with promotions and storefront partners.
share.private.loadable	Class files to be shared across the cluster: this directory is used primarily for C3 Configurator and Visual Modeler.
share.private.noloadable	Configuration files, pagination files, and other files that must be shared across the cluster, but which should not be accessible from users' browsers.

SharedPublicServlet Class

You must uncomment in the element that declares the SharedPublicServlet class: this class is used to serve up static content such as partner logos and promotion images that are uploaded to the Comergent eBusiness System.

```

<servlet>
    <servlet-name>SharedPublicServlet</servlet-name>
    <servlet-class>
        com.comergent.dcm.core.SharedPublicServlet
    </servlet-class>
</servlet>

```

You must also uncomment in the following elements that map URLs to the SharedPublicServlet:

```

<servlet-mapping>

```

```
<servlet-name>SharedPublicServlet</servlet-name>
<url-pattern>/htdocs/partnerlogos/*</url-pattern>
</servlet-mapping>

<servlet-mapping>
  <servlet-name>SharedPublicServlet</servlet-name>
  <url-pattern>/htdocs/promotions/images/*</url-pattern>
</servlet-mapping>
```

For each supported locale, uncomment in the corresponding element:

```
<servlet-mapping>
  <servlet-name>SharedPublicServlet</servlet-name>
  <url-pattern>/la/CO/htdocs/*</url-pattern>
</servlet-mapping>
```

For example, uncomment in the following element for the en_US locale:

```
<servlet-mapping>
  <servlet-name>SharedPublicServlet</servlet-name>
  <url-pattern>/en/US/htdocs/*</url-pattern>
</servlet-mapping>
```

Session Sharing

You must also provide information about how sessions are to be shared across the cluster using the **weblogic.xml** deployment file. You may have already created this file to pass in information about the WebLogic environment or you may have to create it only for this purpose. It should be located in your **Comergent.war** Web application file at the same level as the **web.xml** file.

You must add the following fragment to the **weblogic.xml** file:

```
<session-descriptor>
  <session-param>
    <param-name>PersistentStoreType</param-name>
    <param-value>file</param-value>
  </session-param>
  <session-param>
    <param-name>PersistentStoreDir</param-name>
    <param-value>
      <Directory location common to all members of cluster>
    </param-value>
  </session-param>
</session-descriptor>
```

Note that a more common setting is:

```
<session-param>
  <param-name>PersistentStoreType</param-name>
  <param-value>memory</param-value>
```

```
</session-param>
```

This setting does not support session-failover.

Reloading Files

If shared configuration files can be updated, then each managed server may need to reload the shared copy to pick up changes made by other servers in the cluster. For example, the **SearchConfigurationProperties.xml** file has a setting:

```
<SearchSystemConfigurations>
  <AutoReload activated="true" reloadFilePeriod="30"/>
</SearchSystemConfigurations>
```

Set the `activated` attribute to “true” and set the `reloadFilePeriod` attribute to an interval (in seconds) to specify that if an interval of more than 30 seconds elapses between accesses, then the file should be reloaded.

Running a Clustered WebLogic Installation

In a clustered deployment of WebLogic, you must also perform these steps to ensure that the DTDs used by the Comergent eBusiness System are correctly located. On each machine in the cluster:

1. Create or identify a designated directory that may be used to store the DTDs. For example, you can create a sub-directory called ***container_home/local/working/*** in each WebLogic installation.
2. Unjar the Comergent eBusiness System WAR file, and copy the DTD files from their locations under **WEB-INF/** to the designated directory.
3. Modify **startManagedWebLogic.cmd** or **startManagedWebLogic.sh** to set a new runtime flag: `-DComergent.workingDir`. You can use the `$WL_HOME` variable if the designated directory lies under the ***container_home/*** location. For example:

```
-DComergent.workingDir=$WL_HOME/local/working
```

Setting Up a WebSphere Cluster

This section describes how to set up a WebSphere Release 5.1 cluster and to deploy the Comergent eBusiness System to the cluster.

General

Releases of the Comergent eBusiness System before Release 6.4.1 have known issues with WebSphere and clustering: you should make sure that you have applied

hot fixes to your release that ensure that the SDK builds the WAR file for WebSphere correctly, and so that configuration properties can be passed to the Comergent eBusiness System by setting command line parameters. Contact your Comergent Technologies representative for further details.

Setting up a WebSphere Cluster

A typical WebSphere cluster comprises:

- A deployment manager server
- two or more applications servers running on the same or different machines: these are the cluster member servers
- a load balancing server: this is the Web server to which users point their browsers and which distributes requests to the cluster member servers.

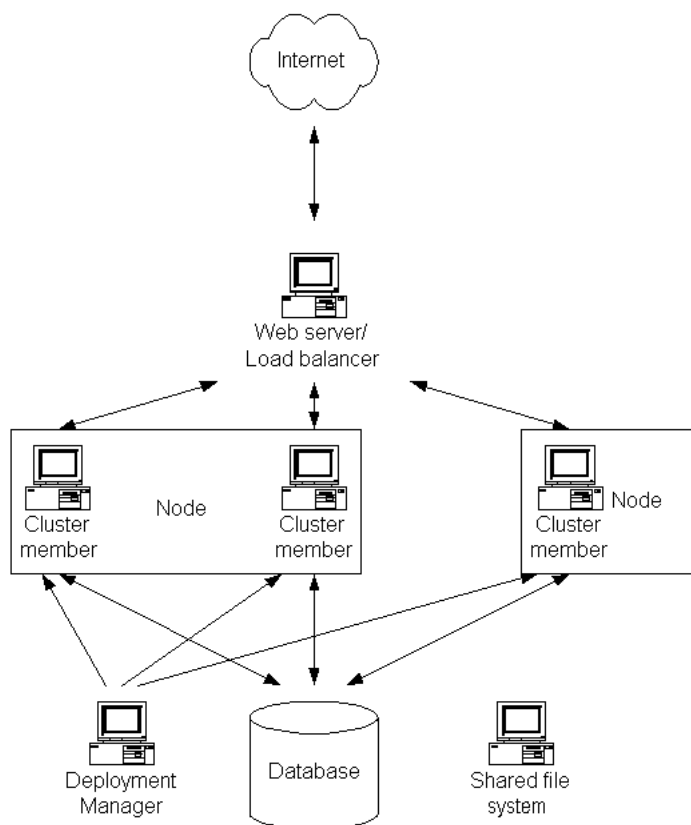


FIGURE 28. WebSphere Cluster Configuration

1. Set up the deployment manager on a machine in your network. It need not run on the same machine on any of the application servers, but the deployment manager and application servers should all be running on the same segment of a local area network. Start the deployment manager (either through the UI or at the command line in ***websphere_home/AppServer/bin/***, enter: **startServer dmgr**).

You use the deployment manager to manage the WebSphere cell: this is where the cluster is run.

2. Install your application servers on the cluster member machines. Each cluster member machine is referred to as a node. You can create one or more application servers on each node.
3. Start the node agent on each node: typically you do this at the command line, by navigating to ***websphere_home/AppServer/bin/*** and entering: **startNode**.
The node agent is what the deployment manager uses to communicate with each node in its cell.
4. Log in to the Deployment Manager administration UI.
5. Add nodes to the cell by clicking **System Administration -> Nodes**, and clicking **Add Node** in the Nodes panel.
6. For each node, add the application servers running on the node to the cell by clicking **Servers -> Application Servers**, and clicking **New** in the Application Servers panel. You must select each node in turn and specify a unique name for each server on the node.

When you have completed creating all the application servers, then you must create the cluster.

7. In the Deployment Manager UI, click **Servers -> Clusters**, and then click **New** in the Server Cluster panel.
8. Enter a name for the cluster and then without add servers to the cluster complete the creation of the cluster.
9. Once the cluster is created, select the cluster from the list of clusters. On the Server Cluster page, click Cluster members and use the Cluster members page to add application servers to the cluster.

When you have added all the application servers to the cluster, check that you can start and stop the cluster by clicking **Servers -> Clusters**, check the check box for the new cluster, and click **Start**. Verify that the cluster starts without any errors, and then click **Stop**.

Building the Comergent eBusiness System Deployment WAR File

You must build the deployment WAR file using the SDK, and must make sure that the cluster settings have been made before you build the WAR file for deployment. Typically, this means that you must customize the **web.xml** and **Comergent.xml**

configuration files to set the cluster settings and the location of the shared directories.

Attention: You must do this in the SDK because once the WAR file is deployed, WebSphere processes the configuration parameters by assigning them IDs. If the cluster settings are commented out, then they will be missed.

Releases prior to Release 6.4.1 should be built using the patched version of the SDK 2.0.4, and you must make sure that you applied any patches relating to your release: notably to support WebSphere and to allow for configuration properties to be set at the command line.

Deploying the Comergent eBusiness System Web Application

Now that you have created the cluster and verified that the cluster can be stopped and started successfully, you are ready to deploy the Comergent eBusiness System Web application to the cluster. Make sure that you have built the deployment WAR file as described in "Building the Comergent eBusiness System Deployment WAR File" on page 386.

1. Copy the deployment WAR file to the deployment manager machine.
2. Log in to the Deployment Manager UI.
3. Click **Applications -> Install New Application**.
4. On the Preparing for the application installation page, select the **Server path** radio button, and click **Browse...** to where you copied the deployment WAR file. Select the radio button next to the WAR file. Click **OK**.
5. Specify a context root, typically of the form: /Comergent.
6. Click **Next**.
7. On the next page, click **Next**.
8. On the next page, click **Continue**.
9. On the Install New Application page, you can change the name of the application, or just click **Next**.
10. On the next page, select a virtual host for the Comergent Product Suite Web application and click **Next**.
11. On the next page, you must specify that the application is to be deployed to the cluster. You do this by selecting the cluster in the list box of Clusters and Servers, checking the Comergent Product Suite check box, and then click **Apply**.

12. Click **Next**.
13. On the next page, check the deployment details for the new application, and then click **Finish**.
14. After the Web application finished deploying, then click **Save** to save the details of the new deployment to the master configuration.

When the WAR file is deployed to the cluster members, it is expanded into a directory *websphere_home/AppServer/installedApps/* sub-directory.

Configuration

You must do the following configuration steps before you can start the cluster and access the new deployment.

Updating the Web Server Plugin

The load-balancing Web server makes use of a configuration XML file to know which requests it receives should be forwarded to the cluster and which machines are in the cluster. This file is called **plugin-cfg.xml** and you must regenerate it after deploying the Web application to the cluster.

1. Log in to the Deployment Manager UI.
2. Click **Environment -> Update Web Server Plugin**.
3. Click **OK**.

The new version of the file is created on the Deployment Manager machine as **websphere_home/DeploymentManager/config/cells/plugin-cfg.xml**.

4. Copy this file to the appropriate location on the load-balancer Web server machine. The precise destination location depends on your Web server solution. For example, if you use the IBM HTTPServer that is part of the IBM WebSphere suite, then you must copy it to the **websphere_home/AppServer/config/cells/plugin-cfg.xml** location on the Web server machine.
5. Restart the Web server to pick up the changed configuration file.

Command Line Settings

All of the application servers in the cluster will deploy exactly the same form of the Comergent eBusiness System Web application in them. Typically, there are some configuration settings that must be set at the application server level: for example, the for SQL Server ServerId setting described in "General Installation Instructions for Clustered Deployment" on page 376 and cron job settings that determine whether application cron jobs run on the cluster member. To set these:

1. Log in to the Deployment Manager UI.
2. Click **Application Servers**.
3. For each application server in the cluster, repeat these steps:
 - a. On the Application Servers page, click the link to the application server.
 - b. Under Additional Properties, click **Process Definition**.
 - c. Under Additional Properties, click **Java Virtual Machine**.
 - d. In the Generic JVM arguments text field, enter the application server properties as appropriate. Note that you only have to do this for properties whose value must be different from that set in the deployed Web application.

For example, to specify that application and system cron jobs should be run on this application server, enter:
`-DComergent.Cron.cronApps=both`

To specify a ServerId value, enter:
`-DDataServices.General.ServerId=12`
 - e. Click **OK**.
4. Once you have completed this step for all members of the cluster, then Save these changes to the master configuration.
5. Stop and then restart the cluster.

Testing the WebSphere Cluster

You can test that the cluster is working correctly simply by pointing your browser to the load-balancing Web server, and verify that you can access the Comergent eBusiness System Web application using the context name that you specified when you deployed the Web application as described in "Deploying the Comergent eBusiness System Web Application" on page 387. For example:

`http://loadbalancer/Comergent/en/US/enterpriseMgr/matrix`

By logging in simultaneously from different browsers, and by examining the application server logs on each application server, you should be able to verify that the browser requests are being distributed among the application servers by the load-balancer. You should also be able to verify that if an application server goes down, that the load-balancer stops routing requests to that application server.

Setting Up Macromedia ClusterCATS

This section describes how to set up Macromedia's ClusterCATS software to support a cluster of JRun application servers running in distributed mode. This approach is no longer supported by Comergent Technologies, Inc., and is included here for legacy purposes only.

It uses an example configuration of four Solaris machines: two running JRun application server and two running Apache Web server as a Web server front-end to their respective application servers. You will have to change the details of the machine names and IP addresses to match your environment. Note that no testing of SSL has yet been performed on such a configuration of the Comergent eBusiness System.

JRun

To implement Comergent eBusiness System in a clustered installation of JRun, you must use a load-balancing solution such as Cisco Local Director.

We cover:

- Requirements
- Overview
- Set Up Round-Robin DNS
- Install Apache Web Servers
- Install JRun Application Servers
- Install Comergent eBusiness System on Two JRun Application Servers
- Installing ClusterCATS
- Creating the Cluster
- Setting Up JRun Probe
- References

Requirements

Software

- JRUN Application Server 3.1.36475

- Apache Web Server 1.3.14: note that the user that runs the Apache session must have appropriate access to the file system to manage user and application files.
- JRUN ClusterCATS 4.5.1a
- Solaris 2.8

Hardware

- You need four Solaris machines with one NIC card for each machine.

Network

- You need access to your enterprise DNS server.

Overview

References

Note that there is more information available from Macromedia which may give you detailed explanations of why certain problems occur if the following steps are not followed properly. See "References" on page 403. Please review these links before reading this document.

Major Steps

These are the main steps to set up ClusterCATS:

Setting up DNS Server

1. Setup DNS Round-Robin.

Install on the Four Unix Boxes

1. Install Apache Web server.
2. Install JRun application server.
3. Connect JRun to Apache.
4. Install ClusterCATS.
5. Set up IP addresses for each machine.

Install on Two Machines Running Apache Web Server

1. Configure Apache Web server to work in distributed mode.
2. Create Cluster.

3. Configure cluster members and JRun Probe.

Install on Two Machines Running JRun Application Server

1. Install and configure the Comergent eBusiness System on two application servers.

The JRun default server must be running for ClusterCATS status messages to run correctly.

Example Configuration

The following are the example IP addresses and machine names that will be used to illustrate setting up the four Solaris servers. These will be set up as two pairs of a front-end Web server and back-end application server.

Cluster name: cluster.matrix.com

Two clustered front-end Web servers (which will run Apache and ClusterCATS):

- System 1:
 - system1.matrix.com with IP address 10.0.0.1
 - clusterweb1.matrix.com with IP address 10.0.0.3
- System 2:
 - system2.matrix.com with IP address 10.0.0.2
 - clusterweb2.matrix.com with IP address 10.0.0.4

Two back-end application server running JRun and the Comergent eBusiness System:

- System 3:
 - app1.matrix.com with IP 10.0.0.5
- System 4:
 - app2.matrix.com with IP 10.0.0.6

If the servers are located in a firewall DMZ, then use the names and IP addresses specific to the DMZ.

Set Up Round-Robin DNS

Contact your DNS system administrator to add these entries to your DNS servers:

Add six fully qualified host names (FQHNs) that are forward and reverse DNS entries for both the Web and application servers:

- system1.matrix.com.com with IP 10.0.0.1
- clusterweb1.matrix.com with 10.0.0.3
- system2.matrix.com with IP 10.0.0.2
- clusterweb2.matrix.com with 10.0.0.4
- app1.matrix.com with IP 10.0.0.5
- app2.matrix.com with IP 10.0.0.6

Add two round-robin DNS entries for the Web server cluster name (forward DNS only):

- cluster.matrix.com with 10.0.0.3
- cluster.matrix.com with 10.0.0.4

Install Apache Web Servers

Install Apache Web Server on the Web server machines (clusterweb1 and clusterweb2) at this path location:

```
/usr/local/apache
```

Use the standard installation procedure for Apache Web servers and, where possible, accept the defaults suggested.

Install JRun Application Servers

This section covers installing JRun and the setup in distributed mode for the two pairs of Apache and JRun servers.

We will setup JRun distributed mode for two pairs:

- clusterweb1.matrix.com and app1.matrix.com
- clusterweb2.matrix.com and app2.matrix.com

To install JRun in this one-to-one distributed environment, we will first configure the back-end JRun application servers followed by the front-end Web servers.

1. Install JRun on the app1.matrix.com and app2.matrix.com which are dedicated as the JRun servers. Use the standard installation procedure for JRun and accept the default values where possible. The installation home is:
/opt/JRun/.

2. On app1.matrix.com and app2.matrix.com, make the following changes to the **local.properties** files for each instance of JRun server:

Note: When making manual changes to the **local.properties** you should shut down the Admin server to prevent your changes from being overwritten. By default the file is in **/opt/JRun/servers/default/**.

- a. You must add this statement to make sure that JRun is using the Connector Wizard:

Add the following line to the end of the **local.properties** files:

```
ranConnector=yes
```

- b. Add the JRun Connector Proxy by appending jcp to the servlet.services property in the List of Services to Start section. The servlet.services property should look like the following:

```
servlet.services=jndi,jdbc,web,url,{servlet.webapps},jcp
```

- c. Set the JCP bind port to the port of the JRun servers in the jcpservices section, as follows:

```
jcp.endpoint.main.port=51000
```

(for app1.comergent.com)

```
jcp.endpoint.main.port=51000
```

(for app2.comergent.com)

- d. Still in the jcpservices section, set the JCP bind address to the IP address for the JRun server machines.

- On app1.matrix.com, set:

```
jcp.endpoint.main.bindaddress=10.0.0.5
```

(app1.matrix.com)

- On app2.matrix.com, set:

```
jcp.endpoint.main.bindaddress=10.0.0.6
```

(app2.matrix.com)

Note: You cannot set the bind address to the loopback address (127.0.0.1), because the Web server would try to connect to a JRun server on itself rather than the other server in its distributed mode pair. If both servers were on the same machine, then 127.0.0.1 would be acceptable.

3. Install JRun under **/opt/JRun/** on the clusterweb1.matrix.com and clusterweb2.matrix.com (the Web server machines). These instances of JRun

will only be used to allow the ClusterCATS application to get particular information; which is stored in the JRun Directory structure. You will startup the JRun Application Servers on the Web server machines only for configuring the Apache Web Server to communicate with the application server running on another machine. After configuring the server this JRun will not be used in the live production environment.

4. On clusterweb1.matrix.com and clusterweb2.matrix.com, run External Web Connector from the JRun Administration page to create a JRun connector to Apache Web server. This step will add following entries to **httpd.conf** of Apache Web servers (located in **/usr/local/apache/conf/**):

```
LoadModule JRun_module136 "/opt/JRun/connectors/Apache/sparc-  
solaris/mod_JRun.so"  
<IfModule mod_JRun.c>  
JRunConfig JRun.rootdir "/opt/JRun"  
JRunConfig jvmlist default  
JRunConfig Verbose false  
</ IfModule mod_JRun.c >
```

5. Stop the Apache web server and modify the **<IfModule mod_JRun.c></IfModule mod_JRun.c >** block in the **httpd.conf** file to the following:

On clusterweb1.matrix.com:

```
LoadModule JRun_module136 "/opt/JRun/connectors/Apache/sparc-  
solaris/mod_JRun.so"  
<IfModule mod_JRun.c>  
#JRunConfig JRun.rootdir "/opt/JRun"  
#JRunConfig jvmlist default  
JRunConfig Verbose true  
JRunConfig ProxyHost 10.0.0.5  
JRunConfig ProxyPort 51000  
JRunConfig Mappings "/opt/JRun/servers/default/local.properties"  
</IfModule>
```

Note that you comment out two lines.

On clusterweb2.matrix.com:

```
LoadModule JRun_module136 "/opt/JRun/connectors/Apache/sparc-  
solaris/mod_JRun.so"  
<IfModule mod_JRun.c>  
#JRunConfig JRun.rootdir "/opt/JRun"  
#JRunConfig jvmlist default  
JRunConfig Verbose true  
JRunConfig ProxyHost 10.0.0.6  
JRunConfig ProxyPort 51000  
JRunConfig Mappings "/opt/JRun/servers/default/local.properties"
```

</IfModule>

Note that you comment out two lines.

6. Stop the JRun application servers on clusterweb1.matrix.com and clusterweb2.matrix.com.
7. Restart the JRun application servers for app1.matrix.com and app2.matrix.com.
8. Restart the Apache Web servers for clusterweb1.matrix.com and clusterweb2.matrix.com.

Test to see if the distributed mode working for all servers, by trying to open the following URLs from a Web browser.

`http://clusterweb1.matrix.com/demo`

`http://clusterweb2.matrix.com/demo`

If you have Apache and JRun working with distributed mode over the Web and application server pairs, then you can go to the next step for installing and setting up ClusterCATS.

Install Comergent eBusiness System on Two JRun Application Servers

Please follow the normal installation process as described in the *Comergent eBusiness System Implementation Guide*.

In each of the installations, set the ServerName element in **Comergent.xml** to clusterweb1.matrix.com and clusterweb2.matrix.com on app1.matrix.com and app2.matrix.com respectively.

Installing ClusterCATS

You must have the following information to successfully install ClusterCATS for JRun on UNIX.

- Root access to the Web server systems on which you will be installing ClusterCATS.
- The names of the Web servers on which you will be installing ClusterCATS (clusterweb1.matrix.com and clusterweb2.matrix.com)
- The name, type and installation directory of the Web Servers you will be clustering:
 - Name of Web Server: clusterweb1, clusterweb2_____
 - Type of Web Server: Apache_____

- Install directory of Web Server: /usr/local/apache_____
- The directory where JRun is installed: /opt/JRun_____

Note: The procedures in this section assume you have already installed JRun and now want to install ClusterCATS.

ClusterCATS works with the Apache Web Server and the Netscape Enterprise Server on Solaris platforms. ClusterCATS also works with the Apache Web Server on Linux.

For additional information about installation options, enter ? at any prompt during the installation procedure. Default selections appear in brackets [default]. Install ClusterCATS under /opt/.

To install ClusterCATS on UNIX

1. Enter the following command as root:

```
./cluster_install
```

The ClusterCATS installation welcome message appears.

Do you wish to continue with this installation? [yes]?

2. Enter yes to continue with the installation or no to exit the installation.

The license agreement confirmation message appears.

Do you agree to the license terms? [no]?

3. Review the license.txt file that is supplied with ClusterCATS. If you agree with the licensing terms enter yes at the prompt. If you do not agree with the licensing terms enter no. Entering no terminates this installation procedure.

The installation directory prompt appears.

Enter install directory for ClusterCATS Server: [/opt]:

4. Press enter to accept the default. The installation will create a **./btcats/** subdirectory under the base directory.

Note: The base directory (such as /opt/) must exist prior to the installation. The installation continues with the Configure Web Server Specific Information section.

If you are installing ClusterCATS on Linux, skip to the next step.

If you are installing ClusterCATS on Solaris, then you are prompted to enter the type of Web server to bind ClusterCATS to:

Enter Web Server type (Netscape, Apache, or <cr> to continue):

5. Type Apache, then press Enter.

You are prompted to enter Apache's installation directory and then the location of the Apache configuration file:

```
Enter Apache installation directory: [/usr/local/apache]:  
Enter location of Apache configuration file httpd.conf: [/usr/  
local/apache/conf]:
```

6. As we have Apache servers installed at **/usr/local/apache/**, we can use default values for this step. If you installed Apache Web server in a different location, then please enter those values accordingly.

```
Optimize load balancing for either HTTP or JRun on https-apache  
[HTTP]:
```

7. Enter JRun

ClusterCATS then prompts you for the JRun installation directory:

```
Enter install directory for JRun []:
```

8. Enter /opt/JRun

ClusterCATS then prompts you to turn on failure monitoring:

```
Monitor Web Server for Failures? [yes]?
```

9. Press Enter to accept the default (yes) to have monitoring turned on for this server.

ClusterCATS optionally supports monitoring and restarting the Web server on server failure. Failures include the server not running or not responding to HTTP requests. ClusterCATS then prompts you to enable server fail over on this server:

```
Enable ClusterCATS Server instance for Fail over? [yes]?
```

10. Press Enter to accept the default (yes) to enable this server to assume the IP addresses for a failed cluster member, and to pick up all the HTTP traffic originally addressed to the failed server.
11. After the installation process completes, set up a second IP address on the network interface card of clusterweb1.matrix.com as follows:

```
ifconfig hme0:1 plumb  
ifconfig hme0:1 up  
ifconfig hme0:1 10.0.0.3 255.0.0.0
```

12. After the installation process completes, set up a second IP address on the network interface card of clusterweb2.matrix.com as follows:

```
ifconfig hme0:1 plumb  
ifconfig hme0:1 up
```

```
ifconfig hme0:1 10.0.0.4 255.0.0.0
```

13. On clusterweb1.matrix.com and clusterweb2.matrix.com change directory to **/opt/btcats/database/**, and modify the file **btinstall.config** as follows:

On clusterweb1.matrix.com:

change "https-apache" to "https-system1.matrix.com" and then change:

```
BT_LO = 10.0.0.2,10.0.0.4
```

```
BT_NSBIND = EXPLICIT
```

On clusterweb2.matrix.com:

change "https-apache" to "https-system2.matrix.com" and then change:

```
BT_LO = 10.0.0.1,10.0.0.3
```

```
BT_NSBIND = EXPLICIT
```

14. After completing this step on each system, change directory to **/opt/btcats/** and run **./bt-reset**.

This sets all the virtual IP addresses for your system.

On clusterweb1.matrix.com, run "ifconfig -a". You should see:

```
lo0: flags=849<UP,LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 127.0.0.1 netmask ff000000
lo0:1: flags=848<LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 10.0.0.2 netmask ff000000
lo0:2: flags=848<LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 10.0.0.4 netmask ff000000
hme0: flags=863<UP,BROADCAST,NOTRAILERS,RUNNING,MULTICAST> mtu
1500
    inet 10.0.0.1 netmask ff000000 broadcast 10.255.255.255
hme0:1: flags=843<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.0.3 netmask ff000000 broadcast 10.255.255.255
```

On clusterweb2.matrix.com, run "ifconfig -a". You should see:

```
lo0: flags=849<UP,LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 127.0.0.1 netmask ff000000
lo0:1: flags=848<LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 10.0.0.1 netmask ff000000
lo0:2: flags=848<LOOPBACK,RUNNING,MULTICAST> mtu 8232
    inet 10.0.0.3 netmask ff000000
hme0: flags=863<UP,BROADCAST,NOTRAILERS,RUNNING,MULTICAST> mtu
1500
    inet 10.0.0.2 netmask ff000000 broadcast 10.255.255.255
hme0:1: flags=843<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.0.4 netmask ff000000 broadcast 10.255.255.255
```

15. You must persist this virtual IP address information to the Web server machines. Typically, this involves creating or modifying the following files:
 - **/etc/hosts**: update with IP addresses for clusterweb1 and clusterweb2.

- `/etc/<hostname>.<if>`: update for each virtual interface, for example:
`/etc/clusterweb1.hme0:1`.
 - `/etc/netmasks`: this needs to be updated if the virtual netmask does not match the logical netmask.
16. Copy `/opt/btcats/btauxdir` from `clusterweb1.matrix.com` to `app1.matrix.com` and `app2.matrix.com` with the same directory structure.
 17. Copy the file `/opt/btcats/btauxdir/jrunmetricthread.class` from `clusterweb1.matrix.com` to `/opt/JRun/servers/lib/` on `app1.matrix.com` and `app2.matrix.com`.
 18. Modify `httpd.conf` on `clusterweb1.matrix.com` and `clusterweb2.matrix.com` in the section starting `Listen`:

On `clusterweb1.matrix.com`: Add the following to `httpd.conf`:

```
listen 10.0.0.1:80
listen 10.0.0.2:80
listen 10.0.0.3:80
listen 10.0.0.4:80
...
ServerName clusterweb1.matrix.com
```

On `clusterweb2.matrix.com`: Add the following to `httpd.conf`:

```
listen 10.0.0.1:80
listen 10.0.0.2:80
listen 10.0.0.3:80
listen 10.0.0.4:80
...
ServerName clusterweb2.matrix.com
```

Make sure that the server names specified using `ServerName` are visible and can be resolved to IP addresses by the Web servers.

19. Set up ClusterCATS Web Explorer. We only need to set up on ClusterCATS Web Explorer on `clusterweb1.matrix.com` or `clusterweb2.matrix.com`. However, you can perform this setup on both machines so that the cluster can still be managed even if one of the machines goes down.
20. First, stop the Apache Web server on the chosen machine.
21. Add the following to `httpd.conf`:

```
###
### BTWeb Administration
###
Listen 10.0.0.1:2222
<VirtualHost 10.0.0.1:2222>
ServerAdmin root@localhost
```



```
DocumentRoot /usr/lib/btcats/btweb
DirectoryIndex default.htm
ServerName btweb
ErrorLog logs/btweb_error_log
CustomLog logs/btweb_access_log combined
### BTWeb stuff ###
AddHandler cgi-script .exe
<Directory "/usr/lib/btcats/btweb/">
Options FollowSymLinks
Options ExecCGI
AllowOverride None
Order allow,deny
Allow from all
AuthName "btcats admin tools"
AuthType Basic
AuthUserFile /usr/local/apache/conf/users
require user admin
</Directory>
</VirtualHost>
```

Note: if you install ClusterCATS Web Explorer on clusterweb2.matrix.com, then change 10.0.0.1 to 10.0.0.2.

22. Change directory to **/usr/local/apache/**, and run:

```
bin/htpasswd -c conf/users <username>
```

When prompted enter the password for this user.

The username and password are saved in the authentication file whose location is specified as the AuthUserFile property. This username and password will be used to log into the administration page of ClusterCATS Web Explorer. Make a note of these in a safe place for future use.

23. Restart the Apache Web servers on clusterweb1.matrix.com and clusterweb2.matrix.com by navigating to **/opt/btcats/** and entering:

```
btadmin start
```

Creating the Cluster

Hardware load balancing (HLB) integration with ClusterCATS does not require the Windows-based ClusterCATS Explorer; you can use the ClusterCATS Web Explorer.

The Windows-based ClusterCATS Explorer provides a simple GUI interface and you can download the latest ClusterCATS Explorer (10.7 MB) from:

```
ftp://ftp.allaire.com/kbftp/ClusterCats/ccwin2k.exe
```

on the Macromedia FTP site.

When installing this application, choose only the Explorer option. If you are running a cluster of Linux or Solaris Web servers (or if you want to manage your NT-based cluster from a remote workstation, laptop, and so on), then you may download the ClusterCATS Explorer and install it on a Windows platform (NT4.0 Workstation or Server, Win98, or Win95).

The ClusterCATS Explorer provides an straightforward user interface; it will manage your UNIX or Linux cluster using port 2222; if the Explorer is on the opposite side of a firewall from the servers, you will need to open port 2222 on the firewall. If you choose not to download the ClusterCATS Explorer, then you may use the ClusterCATS Web Explorer to configure your cluster.

The following steps describe how to use the ClusterCATS Web Explorer to complete configuration of your cluster. They assume that you have set up ClusterCats Web Explorer on clusterweb1.matrix.com. If you have set it up on clusterweb2.matrix.com, then make the appropriate adjustments as you follow these steps.

1. Open the ClusterCATS Web Explorer by pointing your browser to:

`http://clusterweb1.matrix.com:2222`

2. Log in using the username and password created in Step 22 above.
3. Click the **Create New Cluster** link.

The Create New Cluster page appears.

4. Add a new cluster using the fields as described here:

- a. Cluster Name: Enter a unique name for the cluster. For example: cluster. This must match the name set on the DNS server.
- b. Enter clusterweb1.matrix.com for the first server you want to be a member of this cluster. This must be the machine on which you installed ClusterCATS Web Explorer.
- c. License Key: Enter the value supplied by Comergent Customer Support.

The License Key field is case-sensitive, so be sure to enter the key exactly as shown in this step.

5. Click **OK**.

ClusterCATS creates the cluster and displays its members on the Cluster Member. For each additional machine, navigate to its **/opt/btcats/** directory, and run bt-reset.

6. In ClusterCATS Web Explorer, select **Add Server** to add the second member to the cluster.
7. Enter clusterweb2.matrix.com for the second member of the cluster.

Setting Up JRun Probe

1. Open the ClusterCATS Web Explorer by pointing your browser to:
`http://clusterweb1.matrix.com:2222`
2. Select **Server Attributes**, and select clusterweb1.matrix.com from the drop-down list on the right panel. Click **OK**.
3. Click **JRun Probe**, accept all the default settings and click **Register**.

Repeat Step 2 and Step 3 to set up JRun Probe for clusterweb2.matrix.com. When you have done this, then:

4. Under **Cluster Attributes**, select **Alarm Notification** and set the email address to be used for all the failures and warnings, and enter the SMTP Host to send out alerts.
5. Click **OK**.

Testing the System

You can test that you have successfully set up JProbe by following these steps:

1. Ping each of the machines by name to verify that DNS is working correctly.
2. Use a Web browser to access each of the Web and application server pairs. Enter the default URL for the Web server first, and then try the standard URL to access the Comergent eBusiness System.

References

The following are URLs to further information about ClusterCATS. Please note that these URLs are subject to change without notice.

1. Using Macromedia ClusterCATS
`http://docushare/dscgi/ds.py/Get/File-56242/clustercat.pdf`
2. Clustering JRun or Cold Fusion Servers Running in the Distributed-Mode using Macromedia ClusterCATS with Either DNS Round Robin or Cisco Local Director TechNote 19494
`http://www.macromedia.com/v1/handlers/index.cfm?ID=19494&Method=Full&PageCall=/support/index.cfm`

3. How to setup DNS Round Robin. TechNote 12122

<http://www.macromedia.com/v1/handlers/index.cfm?ID=12122&Method=Full&PageCall=/support/index.cfm>

4. Unable to delete web server from cluster TechNote 12103

<http://www.macromedia.com/v1/handlers/index.cfm?ID=12103&Method=Full&PageCall=/support/index.cfm>

5. JRun Enterprise Server Version 3.1 with ClusterCATS Appears To Be 100 Percent Busy TechNote 22137

<http://www.macromedia.com/v1/handlers/index.cfm?ID=22137&Method=Full&PageCall=/support/index.cfm>

6. ClusterCATS: How to use the Administrative Manager TechNote 12144

<http://www.macromedia.com/v1/handlers/index.cfm?ID=12144&Method=Full&PageCall=/support/index.cfm>

7. Macromedia ClusterCATS and Hardware Load Balancing Devices TechNote 15972

<http://www.macromedia.com/v1/handlers/index.cfm?ID=15972&Method=Full&PageCall=/support/index.cfm>

8. Macromedia ClusterCATS and Apache Web Server

<http://www.macromedia.com/v1/Handlers/index.cfm?ID=16363&Method=Full>

Setting up a Database for Caching

Introduction

This implementation of the distributed Global Cache uses the Knowledgebase database server to store session information. Note that in Release 7.0.2, only implementations that use the Oracle database server are supported.

1. Log in to the Comergent eBusiness System as an enterprise administrator.
2. Click **System Services**.
3. Click **C3 Commerce Manager**.
4. In the GlobalCache: Class Name property field, enter:
`com.comergent.dcm.cache.impl.db.DBCache`
5. Click **Save All and return to List**.

Setting up JavaSpaces for Caching

Introduction

This implementation of the distributed Global Cache uses the JavaSpaces technology from Sun Microsystems. This requires a dedicated machine to run the Jini Lookup server, the Javaspaces server, and optionally the transaction server. The steps needed to install and run the JavaSpaces server are described below.

Install the Required Servers

All the Jini servers have an implementation that can be activated using the **rmid** (RMI activation daemon). This means that the servers need to be registered with the **rmid** once, after that they will be automatically restarted if they crash or the machine has been rebooted. The system administrator needs to make sure that the **rmid** daemon is running at all times. In the following section we describe the steps needed to install the Jini Lookup server and JavaSpaces server, and to register the servers with the **rmid** daemon for the first time.

To Implement JavaSpaces

1. Download the Jini Starter Kit v1.2.1_001 from <http://www.sun.com/software/communitysource/jini/download.html>
2. Install the Jini Starter Kit by unzipping the file. This creates a directory called **jini1_2_1_001/** (this is version-dependent, so you may see slightly different numbers). In the following instructions we refer to this directory as **jini_home**.
3. Create a logs directory where you want the servers to store their logs: we will refer to it **logs_home**. This directory can be anywhere on the machine.
4. Start the **rmid** with the following arguments:

```
rmid -d log jini_home/logs -J-Djava.security.policy=none
```

5. You need to make the jar files with ‘-dl’ postfix accessible via a Web server, you can do this by one of the following steps:
 - a. Either, run the supplied Web server using the following command (all on one line):

```
java -jar jini_home/lib/tools.jar -port <port>  
-dir jini_home/jini1_2_1/lib
```

You should select a value for <port> that is private to your network.

- b. Or, copy all the *jini_home/lib/*-dl.jar* files to one of your current Web servers.

6. At the command line, navigate to the *jini_home* directory.

7. Run the Jini Lookup server by entering:

```
java -jar ./lib/reggie.jar http://<host>:<port>/reggie-dl.jar ./policy/policy.reggie logs_home/reggie_log public
```

Replace *<host>* by the name of the machine and *<port>* by the value specified in Step 5a or the port at which the Web server you selected in Step 5b is listening.

8. (Optional) Run the Transaction server by entering:

```
java -jar  
-Djava.security.policy=./policy/policy.all  
-Dcom.sun.jini.mahalo.managerName=TransactionManager ./lib/mahalo.jar http://%HOST%:%PORT%/mahalo-dl.jar ./policy/policy.all  
logs_home/txn_log public
```

9. Run the JavaSpaces server by entering:

```
java -jar -Djava.security.policy=./policy/policy.all  
-Dcom.sun.jini.outtrigger.spaceName=JavaSpace ./lib/outtrigger.jar  
http://<host>:<port>/outtrigger-dl.jar ./policy/policy.all  
logs_home/frontendspace_log public
```

If you delete the *logs_home*/directory, or if the directory is not available, then the **rmid** will not be able to restart the servers.

To Set Up the Comergent eBusiness System

1. Change the globalCacheImplClass property in **Comergent.xml** from:

```
com.comergent.dcm.cache.impl.AppContextCache  
to:  
com.comergent.dcm.cache.impl.space.SpacesCache
```

2. Add the following property to **Comergent.xml** in the General group:

```
<globalCacheParameters controlType="text"  
runtimeDisplayed="true" ChangeOnlyAtBootTime="true"  
visible="true" boxsize="60" displayQuestion="Global Cache: Parameters to be passed to the Global Cache implementation" defaultChoice="" help="Enter a comma separated key value pairs to be passed to the global cache implementation">  
javaspacesname=JavaSpace,transactionservername=TransactionManager
```

```
</globalCacheParameters>
```

The `javaspacesname` and `transactionservername` are the properties used by the Comergent eBusiness System to find both the JavaSpaces server and the Transaction server respectively. Those are the same names used when the servers are started above. If the `transactionservername` is set to an empty String, or is not defined, then the Comergent eBusiness System will not use the Transaction server when accessing the JavaSpaces server.

3. Modify the security policy settings for the servlet container as follows:
 - a. Copy the **policy.all** file to the directory in which the servlet container binaries are stored.
 - b. Modify the command that starts the servlet container JVM by adding:

```
-Djava.security.policy=./policy.all
```

- c. For WebLogic servers, add the following XML fragment to the **weblogic.xml** file:

```
<security-permission-spec>  
    grant { permission java.security.AllPermission "", "";;  
</security-permission-spec>
```

4. Optional: to test that the JavaSpaces server connection is working properly you can set the log level to VERBOSE, and the log flag to GlobalCache in the **Comergent.xml** properties file to get more information.

While the JavaSpaces services can be run on an application server with the Comergent eBusiness System, it is better to run it on an independent, but highly available system. This prevents a single point of failure issue if the joint Comergent eBusiness System/JavaSpaces server fails.

This appendix provides information about operating system patches that need to be applied to support the Java Development Kit for your system.

Patch Information for the Solaris Platform

Java Development Kit 1.2

Determining Which Patches Are Installed

To determine which patches are already installed on your system, use the shell command “showrev”:

```
% showrev -p
```

Check to see if the patches you need, or later versions of the patches, are in this list.

Which Patch Versions Can Be Used?

Let us explain what "or later" means for a patch version. The last two digits of a patch number indicates the patch version; you can use the indicated patch version or later. For example, the version of patch “123456-07” is “07”. In this case, you could use version “07”, or any later version “08”, “09”, “10”, and so forth of the same patch “123456”.

Where to Obtain Patches

If you do not have all the recommended and required patches, then you can obtain TAR bundles of all the patches from the J2SE 1.2 download Web site. This can be reached from the URL:

<http://java.sun.com/products/jdk/1.2/>

These patch bundles are the recommended way to obtain the required patches. However, the information about the required patches in the tables below, include links to the SunSolve Web site where the patches may be obtained individually.

Patches for Solaris 7

The following patches are for the SDK software on the Solaris 7 operating environment.

TABLE 30. Solaris 7 Patches

Need for Patch	For SDK Version	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problem Without Patch
Required	1.2.x	106980-10 or later	106981-10 or later	Libthreads patch	Native threads do not work.
Recommended	1.2.x	107078-07 or later	Not needed	Xserver bug fixes	GUI applications that use dgalib can crash Xserver.

Patches for Solaris 2.6

The following patches are for the SDK software on the Solaris 2.6 operating system.

TABLE 31. Solaris 2.6 Patches

Need for Patch	For SDK Version	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problem Without Patch
Required	1.2.x	105633-10 or later	106248-04 or later	Xserver bug fixes	Xserver might crash when TrueType fonts, which are turned on by default, are used. Also, characters from Type1 fonts may display as blank spaces.
Required	1.2.x	106040-10 or later	106041-10 or later	Input method fix	Input methods will not work in some Asian locales for Swing components.
Recommended only for native threads	1.1.x, 1.2.x	105568-02 or later	105569-02 or later	Threads bug fix	Infrequent problem. Hangs forever inside wait(int millis) or Thread.sleep(int milliseconds).

TABLE 31. Solaris 2.6 Patches (Continued)

Need for Patch	For SDK Version	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problem Without Patch
Required for euro support	1.1.x, 1.2.x	106842-03 or later, 105633-12 or later, and 106841-01 or later	106844-03 or later, and 106248-05 or later, and 105200-06 or later.	Euro support	Input, output, or printing of the Euro symbol are not possible. Formatting of currency strings in Euros does not work.
Required for Traditional Chinese fonts	1.1.x,1. 2.x	106409-01 or later	106410-01 or later	Traditional Chinese TrueType font fix	TrueType fonts for Traditional Chinese characters (zh_TW locale) cannot be displayed.

Obtaining and Installing Patches from SunSolve

You can obtain patches from your warranty provider, from SunService (if you have a SunSpectrum contract) or from the SunSolve Web site. Most of the recommended patches are freely available for download on the SunSolve public Web site.

You can download most patches individually from the SunSolve Recommended and Security Patches Web site.

Some patches are also part of larger groups of patches available as patch clusters. See the Recommended and Security Patch Clusters SunSolve Web site. Each cluster has a README file, accessible from the Web site, which lists the patches it contains.

Installation instructions for both individual patches and patch clusters are available in the README file accompanying each download.

Latest Patch Level Information

Patches recommended in this document are valid as of release date of this document. Visit Sun's Solaris Patch page for latest patch level information.

Java Development Kit 1.3

Determining Which Patches Are Installed

To determine which patches are already installed on your system, use the shell command “showrev”:

```
% showrev -p
```

Check and see if the patches you need, or later versions of them, are in this list.

Where to Obtain Patches

If you do not have all the recommended and required patches, then you can obtain tar bundles of all the patches from the J2SE 1.3 download Web site. This can be reached from the URL:

```
http://java.sun.com/products/jdk/1.3/
```

These patch bundles are the recommended way to obtain the required patches. However, the information about the required patches in the tables below include links to the SunSolve Web site where the patches may be obtained individually.

Some of the J2SE 1.3 patches listed below may not be on the SunSolve list of recommended product patches. However, you can find the patch download page on the SunSolve Web site by using the SunSolve Web site's search facility. Just search for the patch ID number. Don't include the two-digit patch version number in the search in case a more recent version is on the SunSolve Web site.

Which Patch Versions Can Be Used?

The two digits appearing after the dash (“-”) in a patch number indicates the patch *version*. For example, the version of patch 123456-07 is 07. The patch version numbers in the lists of required and recommended patches below are those with which J2SE 1.3 was tested. It is expected that later versions of the patches will also work (with exceptions noted below), though testing of J2SE 1.3 on patch versions later than those listed below has not been done.

Patch Version Incompatibilities

Some recent revisions of Solaris 7 x86 patch 108377, including 108377-10, can cause an Xserver crash. Therefore you should use patch version 108377-06. 108377-06 is included in the Solaris 7 x86 patch bundle available on the J2SE 1.3 download Web site.

Patches for Solaris 8

The following patches are for the SDK software on the Solaris 8 operating environment.

TABLE 32. Solaris 8 Patches

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	108940-12 or later	108941-12 or later	Motif 2.1 patch	Core dump in some situations.
Recommended for CDE users	108921-07 or later	108922-07 or later	For CDE window manager	Spurious FOCUS_LOST and FOCUS_GAINED events.

Patches for Solaris 7

The following patches are for the SDK software on the Solaris 7 operating environment.

TABLE 33. Solaris 7 Patches

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Recommended for CDE users	107226-12 or later	107227-12 or later	For CDE window manager	Spurious FOCUS_LOST and FOCUS_GAINED events.
Required	106980-13 or later	106981-10 or later	Libthreads patch	Java HotSpot Client VM will not run properly.
Required for zh.GBK Chinese locale	107153-01 or later	107152-01 or later	Replaces bad font in zh.GBK locale	Bad Chinese font.
Recommended	107636-06 or later	107637-06 or later	Implementation of composition enabling/disabling API for X input methods	Automatic enabling/disabling of native input methods does not work; input methods are turned off in some situations.

TABLE 33. Solaris 7 Patches (Continued)

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	107544-03 or later, and 106541-12 or later, and 109104-04 or later	107545-03 or later, and 106542-12 or later, and 109105-04 or later	SunOS 2.7 Kernel update	Class java.awt.List can cause virtual machine to dump core.
Required	108376-16 or later	108377-06 <i>Note:</i> At least some later versions of this patch, including 108377-10, cause an Xserver crash. Use 108377-06 rather than a later revision.	OpenWindows 3.6.1 Xsun patch	Required for running Java Compatibility Kit tests. Xserver crash when using some Swing and Java 2D functionality.
Required	106950-13 or later	106951-13 or later	Linker patch	UnsatisfiedLinkError associated with Motif 2.1.

TABLE 33. Solaris 7 Patches (Continued)

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	107081-25 or later	107082-25 or later	Motif 1.2, Motif 2.1 and runtime library patch.	Core dump in some situations, scrollbars may be incorrectly removed from scrollPanels, scrollbars may jump erratically, and menu items and check boxes may have incorrect background color. Symbolic errors from commands such as automountd.
Required	106300-09 or later, and 106327-08 or later.	106328-08 or later	Shared library patch for C++.	No SUNWlibc package.

Patches for Solaris 2.6

The following patches are for the SDK software on the Solaris 2.6 operating system. The first patch in this list is a patch for the *patchadd* utility itself. You should install this patch before installing the other patches in the list.

<p>Attention: An un-patched patchadd utility incorrectly reports the need for pre-requisite patches to some of the patches in this list.</p>

TABLE 34. Solaris 2.6 Patches

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	106125-10 or later	106126-10 or later	Patch for patchadd and patchrm	Patch database problems, mostly on x86 machines.
Required	105633-49 or later	106248-37 or later	Xserver bug fixes	Required for running Java Compatibility Kit tests. Xserver might crash when TrueType fonts, which are turned on by default, are used. Also, characters from Type1 fonts may display as blank spaces.

TABLE 34. Solaris 2.6 Patches (Continued)

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	106040-15 or later	106041-15 or later	Input method fix and implementation of composition enabling/disabling API.	Input methods do not work in some Asian locales for Swing components without version 10 or later of this patch. Without version 13 or later, automatic enabling/disabling of native input methods do not work; input methods are turned off in some situations.
Required	105568-21 or later	105569-16 or later	Threads bug fix	Infrequent problem. Hangs forever inside wait (int millis) or Thread.sleep (int millis).
Required for Euro support	106842-09 or later, 105633-49 or later, and 106841-01 or later	106844-05 or later, and 106248-37 or later, and 105200-12 or later	Euro support	Input, output, or printing of the Euro symbol are not be possible. Formatting of currency strings in Euros does not work.

TABLE 34. Solaris 2.6 Patches (Continued)

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required for Traditional Chinese fonts	106409-01 or later	106410-01 or later	Traditional Chinese TrueType font fix	TrueType fonts for Traditional Chinese characters (zh_TW locale) cannot be displayed.
Required	107733-09 or later	107734-09 or later <i>Note:</i> After revision 09, 105491 is superceded by patch 107734	Linker patch	Problem loading dynamically linked libraries with setuid root.
Required	105210-33 or later	105211-33 or later	LibC patch	Problems related to LibC and watchmalloc.
Required	105181-23 or later	105182-23 or later	Kernel update	Various kernel problems. Also prerequisite for patches 105210 and 105211.
Recommended	105669-10 or later	105670-09 or later	CDE 1.2: libDTSvc patch	Problems related to /usr/dt/lib/libDtSvc.so.1.
Recommended	105284-37 or later	105285-37 or later	Motif 1.2.7: Runtime library patch.	Motif drag loop color scale popup hang SEGV dual toggle keyboard.

TABLE 34. Solaris 2.6 Patches (Continued)

Need for Patch	Solaris-SPARC Patch #	Solaris-x86 Patch #	Nature of Patch	Problems Without Patch
Required	108091-03 or later	108642-03 or later	Update for XI18N_OBJS.	Fatal error in ISO8859-01 Locale.
Required	105591-09 or later	104678-07 or later	C++ Shared library patch.	Exception-handling and other errors in libC.

Obtaining and Installing Patches from SunSolve

You can obtain patches from your warranty provider, from SunService (if you have a SunSpectrum contract) or from the SunSolve Web site. Most of the recommended patches are freely available for download on the SunSolve public Web site.

You can download most patches individually from the SunSolve Recommended and Security Patches Web site.

Note:	Some of the J2SE 1.3 patches listed on this page may not be on the SunSolve list of recommended product patches. However, you can find the patch download page on the SunSolve Web site by using the SunSolve Web site's search facility. Just search for the patch ID number. Do not include the two-digit patch version number in the search in case a more recent version is on the SunSolve Web site.
--------------	---

Some patches are also part of larger groups of patches available as patch clusters. See the Recommended and Security Patch Clusters SunSolve site. Each cluster has a README file, accessible from the Web site, which lists the patches it contains.

Installation instructions for both individual patches and patch clusters are available in the README file accompanying each download.

Latest Patch Level Information

Patches recommended in the this document are valid as of the release date of this document. Visit Sun's Solaris Patch page for the latest patch level information.

Index

Numerics

503 response 179

A

AbstractMessageCracker class 289

access control lists 133

ACSN. See Ariba Commerce Services
Network

activated attribute 383

active server pages

see asp

Actuate ReportCast 29

Actuate server

securing access 247

addApplication method 320

admin user

change password 104

AdminLogin element 323

AdminPasswd element 323

AIX 16

alert

translating strings displayed in Alert
boxes 155, 160

AllowNullConversion element 291

Analyzer element 156, 161

Analyzers element 156, 161

Anderel

using for test partner server 88

any value of Level attribute 169

Apache 80

keepalive 83

serving static content 84

using to compress output 87

Apache Web server 390

Apache web server

expires module 84

app.name property 41, 44

apps.dir property 38

apps.name property 37

Ariba Buyer 281

Ariba Commerce Services Network 281

Ariba Network ID 282

AribaIdentity element 283

asp 343

attributes

ConnectionString 135, 316

DataService 316, 342

Encryption 173, 184, 185

Localized 158

Password 135

state 100

UserId 135

B

- backing up the Comergent System 127
- BaseDN element 323
- binding to a port 120
- BizAPI classes 3
- BLC class 307
- browser support 19
- business logic classe 3
- BusinessRules.xml configuration file
 - setting pricing and entitlements 351

C

- C3 Advisor 4, 130
 - setting start state 192
- C3 Advisor Maximum Number of Menu
 - Shown business rule 132
- C3 Analyzer 4, 29, 229
- C3 Analyzer reports
 - encrypting fields 174
 - localization of reports 27
- C3 Commerce Manager 3
- C3 Configurator
 - session timeout 75
 - use of in-memory compiler 50
- C3 Configurator 4
- C3 Content Manager 265
 - implementing 266
- C3 Content Manager 29
- C3 Integrator 4, 130, 136
- C3 Marketing 4
- C3 MarketLink 75, 281
 - Ariba Buyer 281
 - CommerceOne 284
 - session timeout 75
- C3 MarketLink 4
- C3 Orders 4
- C3 Pricing 5, 130, 347
- C3 Product Manager 4
- C3 Profile Manager 4
- C3 Quotes 4, 130
- C3 Returns 5
- C3_Commerce_Manager element 76
- Catalog Export Set 283
- CatalogDisplayStyle.xml configuration
 - file 132
- certificate authorities 172
- certificates
 - use in the SSL protocol 172
- character set 20

- character sets 149
- charEncoding element 154
- checkEntitlement method 350
- checkPrice method 350
- cipher-update script 184
- Class attribute 176
- classes
 - AbstractMessageCracker 289
 - BLC 307
 - ComergentRequest 293
 - ComergentResponse 293
 - CommonOrderXMLBLC 307
 - Controller 3
 - Converter 134
 - ConverterImpl 291
 - DataManager 294
 - DataService 317, 342
 - DispatchServlet 294
 - Driver 120
 - ForwardController 307
 - generated beans 131
 - HTMLService 341, 342
 - JDBCService 316, 341
 - MessageCracker 293
 - MessageCrackerEntry 293
 - MessageCrackerFactory 293
 - MessagingController 294
 - MessagingServlet 292
 - MsgService 317, 341
 - OracleDriver 120
 - PricingRuleVariableDefinition 349, 351, 353
 - PricingSourceFactory 351
 - SimpleController 307
 - XMLRequest 294
 - XMLRequestAccessor 294
 - XMLResponse 294
 - XMLResponseGenerator 294
- classpath 120
- cluster setup
 - servlet for serving static content 381
- ClusterCATS 390
 - example configuration 392
- clustered deployment 77
- clustered environment
 - encryption of data 185
- clustered implementation 8
- clustering 76
 - ClusterCATS setup 390

- clustering setup 373
- clustering support 18
- CMGT_ANALYZER_TEXT table 103
- CMGT_CURRENCIES table 103
- CMGT_LOCAL_SHIP_COST table 317
- CMGT_LOCAL_TAX table 317
- CMGT_LOCALE table 103
- CMGT_LOCALE_CURRENCY table 103
- CMGT_LOCALE_NAMES table 103
- CMGT_LOOKUPS table 103
- CMGT_OIL table 113
- CMGT_ORDER_EXTN table 113
- CMGT_ORDERS table 113
- cmgt-logging.jar JAR file 145
- cmgtProdMgrTreeViewParam.js parameter file 74
- columns
 - LOCALE_NAME 157
- com.comergent.api.dcm.cryptography.Digester interface 177
- com.comergent.api.dcm.cryptography.SymmetricEncrypter interface 176
- comergent.preferences.store system property 51, 376, 378
- Comergent.xml configuration file
 - setting SSL port 170
- ComergentRequest class 293
- ComergentResponse class 293
- Commerce One
 - Enterprise Buyer 284
 - MarketSite 284
- CommerceOneIdentity element 286
- CommonOrderXMLBLC class 307
- compressed output 87
- ConfigCompiler
 - entry in ObjectMap.xml 50
- configuration file
 - DocushareMimeTypes.xml 268
- configuration files 9, 79, 130, 133
 - BusinessRule.xml 283, 286
 - Comergent.xml 134, 283, 358, 365
 - ConverterMap.xml 134, 139
 - DataServices.xml 69, 100, 101, 120, 185, 316, 376
 - DataSources.xml 98, 119, 365
 - DB2DataSources.xml 100
 - DB2KeyGenerators.xml 98, 100
- debs.ini 85
- default location 79
- Internationalization.xml 99, 151, 154, 157
- KeyGenerators.xml 121
- MessageCrackerMap.xml 289, 293
- MessageTypes.xml 135
- MsSqlDataSources.xml 101
- MsSqlKeyGenerators.xml 98, 121
- OracleDataSources.xml 101
- OracleKeyGenerators.xml 98, 101, 121
 - pointing to Knowledgebase 134
- web.xml 74, 282, 357
- ConfigVersionLookup.xml schema file 69
- Connection element 252
- connection pooling 70
- ConnectionString attribute 48, 49, 135
- ConnectionTimeout element 73
- ConnectOptions element 252
- ConnectTimeout element 71, 141
- container.home property 37, 38, 40
- content type 290
- controller 139
- Controller classes 131
- Converter class 134
- ConverterImpl class 291
- ConverterMap element 134
- ConverterMap.xml configuration file 134
- countries
 - standard abbreviations 151
- country codes 78, 80
- createController method 293
- createDB target 41, 95, 96
- createRequest method 293
- createResponse method 293
- credit card authentication 318
- credit card numbers
 - validation 263
- credit card processing 259
- cronApps property 389
- CryptographyService.xml configuration file 175, 176
- CryptograpyServices.xml configuration file
 - migrating encrypted data 47
- currencies 138, 283, 347, 348
- current locale 152
- customer types 138, 347, 348
- customizing the catalog navigation
 - menu 132
- cXML 282, 283, 288
- CyberSource 318

D

- data bridge 136
- data object
 - using external message-based data source 333
- data objects 3
 - Partner 335
 - reference 130
- data services
 - alternate 317
 - primary 317
- database
 - indexes 94
 - password 14
 - username 14
- database password
 - encrypted 40
- database searches 69
- database server 119
- database servers 98
- database userid 20
- databases
 - client software 19
- DataBean class 336
- DataInterface interface 140
- DataManager
 - initialization error 119
- DataManager class 97, 294
- DataObjects 120
- DataServices element 102, 134
- DataServices.General.ServerId system property
 - use in clustering 379
- DataServices.xml configuration file 69, 73, 100, 101, 140, 141, 161, 376
- DataSource element 48, 49, 334
- DataSourceName attribute
 - using for message service data objects 334
- DataSources.xml configuration file 98
- DATE element 143
- DB2
 - pagesize requirement 21
 - requirements 21
 - starting the JDBC listener 100
 - STMTHEAP parameter 21
- DB2_DATABASE property 49
- DB2_ODBCDSN property 49
- DB2_URL property 49
- DB2DataSources.xml configuration file 100
- DB2KeyGenerators.xml configuration file 98, 100
- DBCACHE class
 - used for session caching 404
- dcmsKey.ser file 97, 184, 376
- debs.dll library file 85
- debs.ini configuration file 85
- DEBSAdminForERP_Password system administration property 298
- DEBSAdminForERP_User system administration property 298
- defaultCountry element 152, 153, 162
- defaultSystemLocale element 99, 151, 152, 153, 162
- definition-id element 278
- deploy.environment property 41, 44
- DictionaryFile element 156, 161
- Digester element 176
- disallow results from triggers 22
- DispatchServlet class 294
 - initialization 179
- display styles 132
- dist target 41, 44, 359
- distributed installation
 - see clustering 76
- distWar target 41, 378
- Docushare 29
- DocuShare server
 - installation 266
- docushareMimeType element 268
- DocushareMimeType.xml configuration file 268
- docusharePassword element 266
- docushareServerURL element 266
- docushareUser element 266
- DsAnalyzerTextList data file 154
- DsDataElement element 185
- DsDataSources element 102
- dship.bat tool 322
- DsKeyGenerators element 98
- DTDs
 - for invoices 322
 - use in RosettaNet messages 332
- DTDs for message-based data objects 334
- DUNS identifiers 332
 - used in RosettaNet messages 332
- dXML 287, 288

- for invoices 322
- inbound messages 308
- outbound messages 308
- dXML messages 308

E

- effectivity dates 348

elements

- AdminLogin 323
- AdminPasswd 323
- AllowNullConversion 291
- Alternate 316
- AribaIdentity 283
- BaseDN 323
- C3_Commerce_Manager 76
- charEncoding 154
- CommerceOneIdentity 286
- ConverterMap 134
- DataServices 102, 134
- DataSource 316, 342
- defaultCountry 152
- defaultSystemLocale 99, 151, 152
- docushareMimeType 268
- docushareServerURL 266
- DsDataSources 102
- DsKeyGenerators 98
- EnableLDAPAuthentication 323
- entitlementFilename 134
- Extrinsic 295
- General 283
- InboundConverter 290
- JdbcDriver 101
- JdbcDriver1 100, 101
- JdbcDriver2 100
- JdbcService 316
- KeyGenerator 120
- Languages 152
- LDAPURLs 323
- LightWeightLookup 307
- LowerCase 69
- MarketLink 283
- memoryThreshold 76
- messageTypeFilename 134
- MessageTypeRef 121
- messageTypeValidate 118, 359
- Microsoft 69
- MsgService 294, 316
- OutboundConverter 290
- pricingEngineMode 351

- Primary 316
- propertiesFile 119
- SecurityAuthentication 323
- ServerId 376
- ServerName 134
- session-timeout 74
- SMTPHost 117
- UpperCase 69
- URLExt 290
- UseLocalizedSort 161
- UserAgent 283
- web-app 75
- WebPathToPublicLoadableWritableDirectory 77
- WebPathToPublicNoLoadableWritableDirectory 77
- email 117
- email addresses in properties files 40, 43
- email clients
 - problems displaying UTF-8 characters 117
- EmailSenderName element
 - setting up partner enterprise server for testing 89
- EnableLDAPAuthentication element 323
- encode method 192
- encrypting data in the Knowledgebase 97
- encrypting fields used in reports 174
- encrypting the database password 40
- encryption 184
 - key file 184
 - passwords 185
- Encryption attribute 184, 185
- EnterpriseOrderStateMachine.xml
 - configuration file 301
- entitlement checking 350
- entitlementFilename element 134
- entitlements 133
- EntitlementSource interface 350
- entries
 - NamingManager 365
 - SSLListener 172
- environment variables
 - JAVA_HOME 36
 - JDK_HOME 35
- ERP system
 - sending orders to 297
- ERPAdmin user
 - change passwords 104

ERPIntegrationUrl system administration
property 298

EventBus class
use by state machine 303
execute method 294
expires_module module 84
external Web servers 85
Extrinsic elements 295

F

fastdeploy target 54
filtering static content 85
ForwardController class 307
functions 133
LOWER 69
UPPER 69

G

General element 283
generateBean target 131, 358
generateDTD target 79, 131, 335, 358
generateIndexFile target 36
GenerateInvoice element 321
getErrorMessage method 320
getMessageCategory method 289
getMessageFamily method 289
getMessageType method 289
getMessageVersion method 289
getReplyCode method 320
global caching and JavaSpaces 405
GlobalBusinessIdentifier element 332

H

HTML templates 78

I

ICSCClient class 320
ICSCClientRequest class 320
ICSReply class 320
images 78
flickering 84
implementing a DataService class 317
importing data 130
InboundConverters element 290
initialization 118
InitServlet class
initialization of cryptography
service 179
InMemoryRuleCompiler

entry in ObjectMap.xml 50
Input element 303
InputBuilder element 272, 279
InputFailedException class 303
install target 38
installation directory
container_home 13
installMsSql target 39, 68, 69
installMSSQLJDBC target 39
installOracle target 38, 39
interfaces
generated for data beans 131
PricingSource 351
internationalization 99
for C3 Advisor 250
Internationalization.xml configuration
file 99, 151, 152, 154, 157
InvoiceChangeRequest message type 321
InvoiceCreateRequest message type 321
invoices 321
iPlanet
troubleshooting 126, 365
Is Offline Configuration and Quoting
Installed? business rule 368
ISO standards 151
ItemsRefLookup.xml schema file 69

J

J2EE 1
Java 2 Platform, Enterprise Edition 1
Java Cryptography Extension 174
Java Servlet Specification 13
support for 2.2 or 2.3 33
JAVA_HOME environment variable 35, 36
JavaSpaces
used for global caching 405
JCE 174
JCEDigester class 180
JCESymmetricEncrypter class 180
JDBC 19
JDBC drivers 120, 140
JDBCdriver element 39
JdbcDriver element 101
JdbcDriver1 element 100, 101, 140
JdbcDriver2 element 100
JDK 1.3.1 17
JDK versions 17
JDK_HOME environment variable 35
Jini Lookup server

- use in global caching 405
- JK2 connector 80
- JRun
 - clustered installation 390
 - distributed mode 393
- JSP pages 3, 191
 - forcing their recompilation 118

K

- keepalive settings 83
- keepgenerated parameter 59
- key rotation 180
- key store 176
- key stores 179
 - initialization 179
- KeyGenerators.xml configuration file 121
- KeyManager attribute 176
- KeyManager element 176, 183
- KeyName attribute 176
- KeyStorePath attribute 183
- keystores
 - JDK versions 17
- Knowledgebase 14, 20, 91, 92, 130, 232
 - locale settings for Actuate 238
 - populating the 136
 - schema creation 93

L

- language codes 78, 80
- languages 149
 - standard abbreviations 151
- Languages element 152, 162
- LDAP 11, 322
 - administrator userid 323
 - base distinguished name 323
- LDAPURLs element 323
- Level attribute 169
- library files
 - debs.dll 85
- LightWeightLookup element 307
- LightWeightLookupList file 154
- link method 169, 192
- load-balancing
 - session-sticky 376
- loadDB target 42, 96, 102
- loadMatrixDB target 42, 96, 102
- Locale element
 - used to localise advanced search 156, 161

- locale families 153
- LocaleDataList data file 154
- LocaleNameDataList file 154
- locales 138
 - case-sensitive searching 69
 - changing value of product category root
 - node label 74
 - database support 93
 - default for language 153
 - directories 78, 80
 - display names 152
 - loading locale-specific data 100
 - locale-specific sorting 142
 - removing from implementation 103
 - sorting 161
 - standard abbreviations 151
 - support for different 99
 - system default 151, 153
- localization
 - configuring advanced search 156, 161
- Localized attribute 158
- log files
 - standard locations 147
- log files get too large 147
- logging 145
- logging levels 146
- LowerCase element 69, 143
- LUHN algorithm
 - used for credit card number validation 263

M

- ManufacturerName element
 - setting up partner enterprise server for testing 89
- MarketSite
 - TPID 286
- MaxConnections property 72, 73
- MaxPermSize setting 76
- MaxPoolSize attribute 73
- MaxPoolSize property 72
- MaxResults element 141
- memory allocation 76
- memoryThreshold element 76
- merchant certificate 260, 261
- merchant ID 318
- merchant id 260, 261
- merchant reference number 318, 319
- merchantRefNumber element 319

- merge target 41, 44, 359
- message category 288
- message conversion 287
- message family 288, 293
- message group 133
- message type 288, 293
- message types 133
 - accessing through SSL 170
 - validating on startup 118, 359
- Message URL 365
- message version 288, 293
- message-based data objects 334
- MessageCracker class 293
- MessageCrackerEntry class 293
- MessageCrackerFactory class 293
- MessageCrackerMap.xml configuration file 289, 293
- messages 139
- messageTypeFilename element 134
- MessageTypeRef element 121
- MessageTypes.xml configuration file 135
- messageTypeValidate element 118, 359
- MessagingController class 294
- MessagingServlet class 292
- MetaData class 295
- MethodNotFound exceptions 118
- methods
 - createController 293
 - createRequest 293
 - createResponse 293
 - encode 192
 - execute 294
 - getMessageCategory 289
 - getMessageFamily 289
 - getMessageType 289
 - getMessageVersion 289
 - getRules 352
 - link 169, 192
 - persist 317, 342
 - restore 317, 342
 - setDefinition 352
 - setDescription 352
 - setID 352
 - setType 352
- Microsoft element 69
- Microsoft SQL Server 94
- migrating orders data 113
- minimal data set
 - root product category 74

- mod_expires
 - use to prevent image flicker 84
- ModelSubGroup.xml schema file 69
- MsgService data service class 334
- MsgService element 294
- MsgType attribute 334
- MsSqlDataSources.xml configuration file 101
- MSSQLJDBC_DATABASE property 49
- MSSQLJDBC_PASSWORD property 49
- MSSQLJDBC_USERNAME property 49
- MsSqlJNI.dll file 101
- MsSqlKeyGenerators.xml configuration file 98, 121
- MTMenuText variable 74
- my_sdk.properties file 37

N

- Name attribute 175, 176, 290, 295, 303
- name attribute
 - of Proxy element 280
- newproject target 38, 43
- number and date formats 149
- NumPerPage element 141

O

- ObjectMap.xml configuration file 50
- ObjectType attribute 334
- OCI driver 28
- ODBC connection 19
 - used in C3 Analyzer 229
- ODBC source 22, 34
 - setting up the Knowledgebase for C3 Analyzer 235
- ODBC_DATABASE property 48
- ODBC_PASSWORD property 48
- ODBC_URL property 48, 49
 - used with MSSQLJDBC DB_TYPE 49
- ODBC_USERNAME property 48
- ODBCDriver class 14
- OdbcJNI.dll file 68
- OILCreditCard class 319
- OILTaxes class 319
- OneWayEncrypter element 176
- online help 78
- Operation element 272
- Oracle
 - OCI driver 68
- Oracle Server 93

ORACLE_DATABASE property 48
 ORACLE_URL property 48
 OracleDataSources.xml configuration file 101
 OracleKeyGenerators.xml configuration file 98, 101, 121
 Order Process Modeler 143, 301
 order state machines
 payment gateways 259
 order statuses 138
 orderCCauthorizationPropsFile element 319
 OrderInquiryList class 319
 orders
 controllers and BLCs 307
 integrating with ERP system 297
 migrating data 113
 states 299
 OrderShipmentUpdateRequest message type 321
 OutboundConverters element 290

P

packages
 com.comergent.apps.pricingMgr.pmComergent.core 351
 pageregistry.xml configuration file 275
 pagination settings 73
 parameters
 startstate 192
 partner
 Direct Commerce-enabled 283
 Partner data object 335
 partner levels 138
 partner profiles 365
 partner selector 132
 partner server setting up 88
 partner types 138
 partners 139
 password 20
 Password attribute 135
 passwords
 changing password of admin and ERPAdmin users 104
 patches
 for operating systems 409
 obtaining for Solaris 420
 PATH environment variable 35
 payment gateway
 troubleshooting 263
 payment gateways 259
 PaymentSetupController class 262
 performInputAction method 303
 persist
 using with message service 333
 persist method 317
 using for message-based data object 336
 portlet element 272
 portlet.xml configuration file 272, 276
 portletcontexts.txt configuration file 275
 portletentityregistry.xml configuration file 274
 portlet-guid parameter 276
 portlet-name element 278
 Portlets.xml configuration file 272
 pre-compiling JSP pages 57, 59
 preferred locale 152
 prefs.xml configuration file 51
 price and availability requests 365
 price lists 283, 347
 for entitlement only 350
 PriceCheckAPI class 350
 pricing engine 350
 Pricing Engine Type business rule 351
 pricing rule variables
 options 349
 PricingEngine class 351
 pricingEngineMode element 351
 PricingSource interface 350, 351
 PricingSourceFactory class 350, 351
 product categories 348
 display styles 132
 product category hierarchy 74
 product category root node 74
 production mode
 WebLogic 60
 products 348
 PROGRESSIVE_REFRESH
 parameter 237
 propertiesFile element 119
 protocols
 https 172
 Proxy element 271

R

ReconnectOnTimeout element 72, 141
 reference data objects 130
 registry keys 28

reloadFilePeriod attribute 383
 RemoteSession class 336
 removing locales 103
 reply method 320
 requests 139
 requireHttps value of Level attribute 170
 requirements 8
 database server 20
 hardware 15
 network 19
 software 16
 ResellerSelectorListController class 132
 ResellerSelectorListSelectController
 class 133
 ResellerSelectorSelectData.jsp page 132
 restore method 317
 restoring the Comergent System 127
 returns 299
 controllers and BLCs 307
 returnUrl element 332
 roles 9, 133
 MarketProcurementUser 285
 ProcurementUser 283
 Roles attribute 303
 RosettaNet 79, 288
 RosettaNet messages
 implementation steps 331
 RosettaNet.xml configuration file 333
 rsCachePath element 73, 142
 rsCachePathIsAbsolute element 73
 rule variables 349
 RuleCompiler
 entry in ObjectMap.xml 51
 rules 348

S

sales tax calculation 317, 318
 saveOnRestart attribute
 Tomcat setting 54
 schema
 http and https 169
 scripts
 oracle_indexes.sql 94
 XMLLoader.bat 97
 SDK
 See Software Development Kit
 SearchConfigurationProperties.xml
 configuration file
 supporting locales 156, 161
 SearchConfigurationProperties.xml file
 in clustered environment 383
 searches
 case-sensitive 69
 security 9, 11
 changing passwords for admin and
 ERPAdmin 169
 SecurityAuthentication element 323
 SecurityLevel element 169
 Send Orders XML msgs to ERP system
 administration property 298
 ServerId element 69, 142, 376
 ServerId property 379, 389
 ServerLoadBalanceUrl element 333
 ServerName element 126, 134
 ServerSSLPort element 170
 Service element 272
 ServiceDefinition element 272, 279
 services 138
 servlet container
 root directory 34
 support for clusters 18
 servlet containers
 requirements 17
 servlet context 14
 servlet-mapping elements 162
 session timeout 74
 sessions 74
 SESSIONS.ser
 Tomcat session file 53
 troubleshooting 118
 session-sticky load-balancing 376
 session-timeout element 74
 setDistributorKey method 336
 setExtrinsic method 295
 setMerchantRefNo method 320
 setPartnerId method 336
 setting C3 Advisor start state 192
 setting up a partner server 88
 SharedPublicServlet class 381
 shipping charges 317
 shipping information 317
 SimpleController class 307
 skills 138
 SMTP mail server 117
 SMTPHost element 117
 Software Development Kit
 installing 36
 Solaris 17

- Solaris patches 17
- sorting
 - specific to locales 142
- sorting data 161
- SQL scripts 137
- SQL Server
 - clustering step 379
 - in a clustered environment 376
 - required DLL 68
 - requirements 22
- SQL Server use of Unicode 22
- SQLDataInterface interface 140
- SSL 169, 171
 - client 172
 - protocol 172
 - server 172
 - setting up Apache 82
- SSL port in Comergent.xml file 170
- standard locations of log files 147
- startstate parameter 192
- state attribute 96, 100
- State element 303
- state machines 301
- static content
 - filtering 85
 - serving up using Web server 84
- STDOUT appender 146
- stored procedures 21
- SupportsIntersect element 143
- SymmetricEncrypter element 175
- system default locale 151

T

- tables
 - CMGT_CURRENCIES 348
 - CMGT_LOOKUPS 138, 307
 - CMGT_USER_CONTACTS 157
 - CMGT_VERTICAL_MARKETS 348
- tablespaces 94
- Tag attribute 175, 176
- targets
 - createDB 96
 - dist 44
 - distWar 41
 - generateDTD 79
 - install 38
 - installMsSql 39
 - installMSSQLJDBC 39
 - installOracle 38, 39

- newproject 38, 43
- tax calculation 317
- territories 138
- text tag 150, 154, 159
- TNS alias 34
 - setting up the Knowledgebase for C3 Analyzer 235
- Tomcat

- disable session persistence 54
 - problem with graceful shutdown 53
- trading partner enrollment form 338
- Trading Partner ID 286
- Trading Partner ID. See MarketSite
- translating Javascript files 155, 160
- TwoWayEncrypter element 175
- type attribute 96

U

- Unicode 20
 - use with SQL Server 22
- Unicode characters
 - browser support 20
- UNIX 16
- UPDATE counts 22
- updateFieldVisibility method 262
- upgrading
 - data migration 91
- upgrading from Release 6.0 43
- UpperCase element 69, 143
- URLExt element 290
- URLs
 - PunchOut 283
 - PurchaseOrder 283
- useExternalCreditCardAuthorization element 317, 318, 319
- useExternalTaxSystem element 317, 319
- useHttp value of Level attribute 169
- useHttps value of Level attribute 169
- UseLocalizedSort element 142, 161
- user authentication
 - using LDAP 322
- UserContact data object 178
- UserId attribute 135
- username 20
- useSessionCaching system property 376
- UTF-8 20
 - database setting 28

V

validateAndSaveGatewayInformation
 method 262
vertical markets 138, 347, 348
ViewControl element 272, 279

W

web.xml configuration file 74
web-app element 75
WebLogic
 clustered implementation 377
WebLogic production mode 60
weblogic.security.SSL.enforceConstraints
 used to work around payment gateway
 issue 263
WebPathToPublicLoadableWritableDirectory element 77
WebPathToPublicNoLoadableWritableDirectory element 77
WidgetController class
 use in C3 Content Manager 267
Windows 2000 17
windows.system.dir property 39
workingDir parameter
 in weblogic.xml 59
WSProxyConfigurations.xml configuration
 file 271, 278

X

xCBL 285, 288
XML 287
XML data loading 136, 138
XML parser libraries 53
XMLLoader utility 307
XMLLoader.bat script 97
XMLRequest class 294
XMLRequestAccessor class 294
XMLResponse class 294
XMLResponseGenerator class 294
XSLT 287