

IBM<sup>®</sup> Net.Data



# Language Environment Interface Reference

*Version 7*



IBM<sup>®</sup> Net.Data



# Language Environment Interface Reference

*Version 7*

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 61.

This document contains proprietary information of IBM. It is provided under a license agreement and is protected by copyright law. The information contained in this publication does not include any product warranties, and any statements provided in this manual should not be interpreted as such.

Order publications through your IBM representative or the IBM branch office serving your locality or by calling 1-800-879-2755 in the United States or 1-800-IBM-4YOU in Canada.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© **Copyright International Business Machines Corporation 1997, 2000. All rights reserved.**

US Government Users Restricted Rights - Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

---

# Contents

<b>Preface.</b> . . . . .	<b>v</b>	<code>dtw_row_SetV()</code> . . . . .	22
About Net.Data . . . . .	v	<code>dtw_strdup()</code> . . . . .	23
About This Book . . . . .	vi	<code>dtw_table_AppendRow()</code> . . . . .	24
Who Should Read This Book . . . . .	vi	<code>dtw_table_Cols()</code> . . . . .	25
About Examples in This Book . . . . .	vi	<code>dtw_table_Delete()</code> . . . . .	26
<b>About Net.Data Language Environments</b> . . . . .	<b>vii</b>	<code>dtw_table_DeleteCol()</code> . . . . .	27
<b>Chapter 1. Creating a New Language Environment</b> . . . . .	<b>1</b>	<code>dtw_table_DeleteRow()</code> . . . . .	28
Creating a Shared Library. . . . .	2	<code>dtw_table_GetN()</code> . . . . .	29
Language Environment Interface Functions . . . . .	2	<code>dtw_table_GetV()</code> . . . . .	30
Processing Input Parameters . . . . .	6	<code>dtw_table_InsertCol()</code> . . . . .	31
Processing User Requests . . . . .	6	<code>dtw_table_InsertRow()</code> . . . . .	32
Returning Result Sets to the Caller . . . . .	7	<code>dtw_table_MaxRows()</code> . . . . .	33
Processing OUT and INOUT Parameters . . . . .	7	<code>dtw_table_New()</code> . . . . .	34
Communicating Error Conditions . . . . .	7	<code>dtw_table_QueryColnoNj()</code> . . . . .	35
Language Environment Communication Structures . . . . .	8	<code>dtw_table_Rows()</code> . . . . .	36
The <code>dtw_lei_t</code> Structure . . . . .	8	<code>dtw_table_SetCols()</code> . . . . .	37
The <code>dtw_parm_data_t</code> Structure . . . . .	11	<code>dtw_table_SetN()</code> . . . . .	38
Designing the Language Environment Statement . . . . .	12	<code>dtw_table_SetV()</code> . . . . .	39
ENVIRONMENT Statement Syntax . . . . .	12	<b>Appendix A. Net.Data Technical Library</b> . . . . .	<b>41</b>
ENVIRONMENT Statement Examples . . . . .	14	<b>Appendix B. Language Environment Template</b> . . . . .	<b>43</b>
<b>Chapter 2. The Language Environment Programming Interface Utility Functions</b> . . . . .	<b>15</b>	<b>Appendix C. Build File Examples</b> . . . . .	<b>57</b>
Language Environment Utility Functions . . . . .	15	Sample OS/390 JCL . . . . .	57
Utility Functions for Managing Memory . . . . .	15	Sample makefile (OS/390-specific) . . . . .	59
Utility Functions for Managing Configuration Variables . . . . .	16	Sample OS/400 CL. . . . .	60
Utility Functions for Table Manipulation . . . . .	16	<b>Notices</b> . . . . .	<b>61</b>
Utility Functions for Row Manipulation. . . . .	17	Trademarks . . . . .	64
Utility Functions Syntax Reference . . . . .	17	<b>Glossary</b> . . . . .	<b>67</b>
<code>dtw_free()</code> . . . . .	18	<b>Index</b> . . . . .	<b>71</b>
<code>dtw_getvar()</code> . . . . .	19	<b>Contacting IBM</b> . . . . .	<b>73</b>
<code>dtw_malloc()</code> . . . . .	20	Product Information . . . . .	73
<code>dtw_row_SetCols()</code> . . . . .	21		



---

## Preface

Thank you for selecting Net.Data<sup>®</sup>, the IBM<sup>®</sup> development tool for creating dynamic Web pages! With Net.Data you can rapidly develop Web pages with dynamic content by incorporating data from a variety of data sources and by using the power of programming languages you already know.

---

### About Net.Data

With IBM's Net.Data product, you can create dynamic Web pages using data from both relational and non-relational database management systems (DBMSs), including DB2, IMS, ODBC-enabled databases, and databases that can be accessed through DRDA, and using applications written in programming languages such as Java, JavaScript, Perl, C, C++, and REXX. The Net.Data family of products provides similar capabilities on machines executing the Windows NT, AIX, OS/2, OS/390, OS/400, HP-UX, PTX, Linux, and Sun Solaris operating systems.

Net.Data is a macro processor that executes as middleware on a Web server machine. You can write Net.Data application programs, called *macros*, that Net.Data interprets to create dynamic Web pages with customized content based on input from the user, the current state of your databases, other data sources, existing business logic, and other factors that you design into your macro.

A request, in the form of a URL (uniform resource locator), flows from a browser, such as Netscape Navigator or Internet Explorer, to a Web server that forwards the request to Net.Data for execution. Net.Data locates and executes the macro, and builds a Web page that it customizes based on functions that you write. These functions can:

- Encapsulate business logic within applications written in, but not limited to, C, C++, RPG, COBOL, JAVA, Perl, or REXX programming languages
- Access databases such as DB2
- Access other data sources such as flat files

Net.Data passes this Web page to the Web server, which in turn forwards the page over the network for display at the browser.

Net.Data can be used in server environments that are configured to use interfaces such as HyperText Transfer Protocol (HTTP) and Common Gateway Interface (CGI). HTTP is an industry-standard interface for interaction between a browser and Web server, and CGI is an industry-standard interface

for Web server invocation of gateway applications like Net.Data. These interfaces allow you to select your favorite browser or Web server for use with Net.Data.

For improved performance, Net.Data supports a variety of Web server Application Programming Interfaces (APIs). In addition, Net.Data can be launched as a Java servlet.

---

## About This Book

This book describes Net.Data's Language Environment Interface (LEI), which you can use to develop your own custom language environments for Net.Data.

This book might refer to products or features that are announced, but not yet available.

More information including sample Net.Data macros, demos, and the latest copy of this book, is available from the following World Wide Web sites:

- <http://www.ibm.com/software/data/net.data>
- <http://www.as400.ibm.com/netdata>

## Who Should Read This Book

People who want to extend the functionality of Net.Data to meet the needs of their particular enterprise can use this book to write their own language environments for Net.Data.

To understand the concepts discussed in this book, you should be familiar with the following information:

- The C programming language
- The information in *Net.Data Administration and Programming Guide* and *Net.Data Reference*

## About Examples in This Book

Examples used in this book are kept simple to illustrate specific concepts and do not consider every possible case. Some examples are fragments that do not work alone.



---

## About Net.Data Language Environments

Net.Data is designed to allow new programming language and database interfaces to be added in a pluggable fashion. These interfaces are called language environments and are accessed as DLLs or shared libraries. Language environments provide access to applications and databases that support your dynamic Web pages. By invoking language environments with function calls, you can use the functionality that these language environments provide for use with your business application. For example, you can directly access your ODBC database, use the Perl language environment to execute Perl scripts, or call the Java Applets language environment to run Java applets.

The Net.Data initialization file associates each language environment name with a DLL or shared library. Each language environment must support a standard set of interfaces defined by Net.Data. Net.Data loads the DLL or shared library specified in the initialization file the first time that a function call for a FUNCTION block specifying that language environment is encountered.

Net.Data parses the Net.Data macro, maintains the Net.Data variables, communicates with the language environments, and formats the output according to the REPORT and MESSAGE block specifications. The language environment supports the interfaces defined to Net.Data, makes the Net.Data parameters accessible to the language processor in some language-dependent manner, calls the language interpreter, and receives the variables back from the language interpreter in some language-dependent manner.

Figure 1 on page viii demonstrates Net.Data's interaction with language environments.

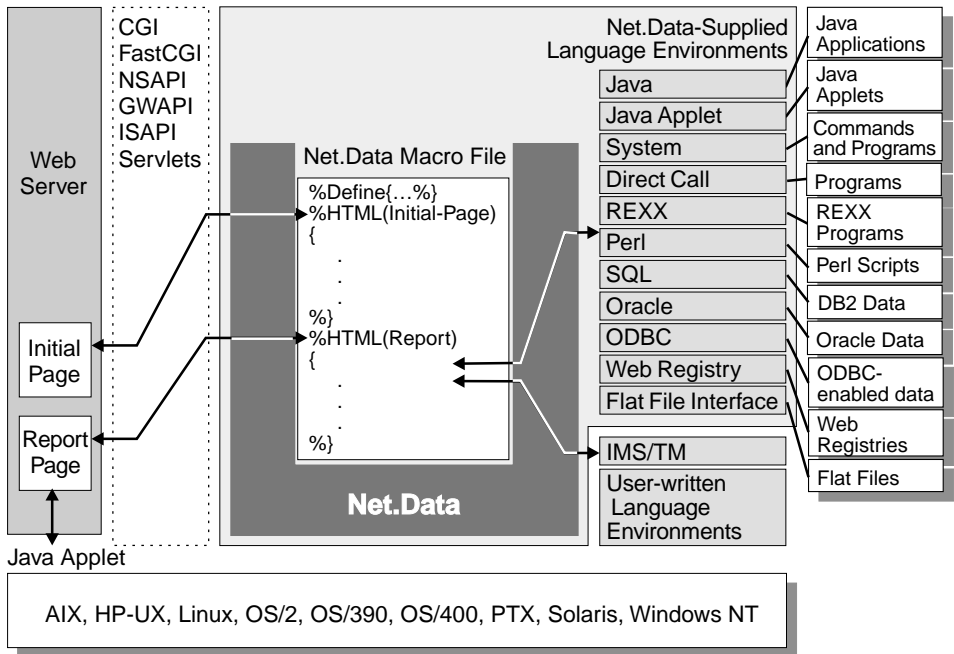


Figure 1. Net.Data and Language Environments

This book describes the Net.Data language environment interface used to create new language environments. The Net.Data-supplied language environments are described in the language environment chapter of *Net.Data Administration and Programming Guide* for your operating system.

---

## Chapter 1. Creating a New Language Environment

Net.Data uses language environments as pluggable programming language and database interfaces, accessed as DLL files, shared libraries, or service programs depending upon your operating system environment. In this document the term *shared library* is used when generically referring to these types files. Net.Data provides a set of language environments, but when these language environments do not meet your application needs, you can create your own, using the Net.Data language environment interface.

Creating a new language environment involves the following steps:

- Determine what interfaces and functions you must provide for the language environment. The `dtw_execute()` interface must be provided, and all provided interfaces must match exactly the prototypes that are defined in the `dtwle.h` C language header.
- Build a shared library that implements the set of language environment interface routines you want to provide. See the documentation for your compiler to understand how to build shared libraries.
- Make all interfaces externally available from the shared library so Net.Data can call them.
- Determine your `ENVIRONMENT` configuration statement, then add it to the Net.Data initialization file.
- Add functions to the Net.Data macro that uses the new language environment.

Before you decide to create a new language environment, determine if the Net.Data-supplied language environments satisfy your requirements.

This chapter describes how to design the language environment.

- “Creating a Shared Library” on page 2
- “Language Environment Communication Structures” on page 8
- “Language Environment Interface Functions” on page 2
- “Designing the Language Environment Statement” on page 12

To learn about the language environment programming interface, see “Chapter 2. The Language Environment Programming Interface Utility Functions” on page 15.

---

## Creating a Shared Library

When you build a language environment, you can use the template supplied in “Appendix B. Language Environment Template” on page 43, which provides the environment interface functions and the communication structures used by Net.Data to communicate with your language environment and to pass parameters to and from the language environment.

The following sections describe concepts and design issues for the functions and structures. The utilities provided in the language environment interface are described in “Chapter 2. The Language Environment Programming Interface Utility Functions” on page 15.

- “Language Environment Interface Functions”
- “Processing Input Parameters” on page 6
- “Processing User Requests” on page 6
- “Processing OUT and INOUT Parameters” on page 7
- “Communicating Error Conditions” on page 7

### Language Environment Interface Functions

When you write a language environment, you must determine which interfaces to provide. Your choices depend on what you intend the language environment to do. For example, if the language environment will be accessing database data, you’ll make different choices than if it is for a scripting language.

Net.Data uses four interface functions with a language environment.

1. `dtw_initialize()`
2. `dtw_execute()`
3. `dtw_getNextRow()`
4. `dtw_cleanup()`

You provide one or more of these functions. Three of these functions are optional, but every language environment must have a `dtw_execute()` interface function. If a Net.Data macro references a language environment that does not have a `dtw_execute()` interface function, Net.Data returns an error message and stops processing the Net.Data macro.

To call a language environment, reference it on the FUNCTION block of the Net.Data macro. The language environment interface functions will be called if they are defined by the language environment:

When Net.Data encounters a call to a function that uses the language environment, it uses the following steps to call the language environment:

1. Net.Data calls `dtw_initialize()` if it has been defined for this language environment, and if it is the first function call for this language

environment. The function performs any initialization tasks required by the language environment, such as connecting to databases, or allocating variables.

2. Net.Data calls `dtw_execute()` to process the macro FUNCTION block containing statements or a command that the language environment must process.
3. Net.Data calls `dtw_getNextRow()` if, upon successful return, `dtw_execute()` indicated that `dtw_getNextRow()` should be called.
4. When the Net.Data macro processing is complete, Net.Data calls `dtw_cleanup()` to clean up the environment (for example, disconnecting from a database or releasing resources), if this function has been defined for the language environment, and then returns to the Web server.

The following sections describe the interface functions:

- “`dtw_initialize()`”
- “`dtw_execute()`”
- “`dtw_getNextRow()`” on page 4
- “`dtw_cleanup()`” on page 5

### **dtw\_initialize()**

**Format:**

```
int dtw_initialize(dtw_lei_t *);
```

The `dtw_initialize()` interface function performs any special initialization that the language environment requires, such as connecting to a database or allocating resources. This interface function is optional.

Net.Data calls a language environment's `dtw_initialize()` interface function only once per macro, the first time Net.Data calls a FUNCTION block for that language environment. Subsequent calls to the language environment bypass the call to the `dtw_initialize()` interface function.

This interface function does not affect message block processing. A positive or zero return code means that processing continues; a negative return code means that processing does not continue. If the return code is non-zero and a default message is defined in the `default_error_message` field of the `dtw_lei_t` structure, Net.Data issues the default message; if no default message exists, Net.Data issues an error message.

### **dtw\_execute()**

**Format:**

```
dtw_execute(dtw_lei_t *);
```

The `dtw_execute()` interface function processes FUNCTION blocks on each function call. The FUNCTION blocks can contain statements or a command that will be processed in the `dtw_execute()` function.

The `dtw_execute()` interface function is called whenever a `Net.Data` macro calls a function that refers to the language environment. When the `dtw_execute()` interface function completes, `Net.Data` checks the return code and the flags field of the `dtw_lei_t` structure. If the return code is 0, `Net.Data` checks to see if `DTW_LE_CONTINUE` is set in the flags field. If it is, then `Net.Data` will call the `dtw_getNextRow()` interface function (see “`dtw_getNextRow()`”). If the return code is not zero, `Net.Data` will check the global and local MESSAGE blocks to determine the next course of action. If no MESSAGE blocks exists or if `Net.Data` cannot find a matching return code entry in any MESSAGE block, `Net.Data` will continue processing if the return code is positive, or it will end macro processing if the return code is negative.

You can optimize performance by having the `dtw_execute()` interface function do all the processing necessary to produce the input for the report block processing. For example, your `dtw_execute()` interface function can generate an entire table to be processed during the report block phase

### **`dtw_getNextRow()`**

**Format:**

```
int dtw_getNextRow(dtw_lei_t *);
```

The `dtw_getNextRow()` interface function retrieves input for row-at-a-time processing of `Net.Data` REPORT blocks. It is called as long as the `DTW_LE_CONTINUE` flag is set, indicating that another row of data needs to be processed for the table. This interface function is optional.

**Restriction:** This interface function is only called if `Net.Data` is running on the OS/400 or OS/390 operating systems.

`Net.Data` calls `dtw_getNextRow()` when the following conditions are met:

- The call to the language environment’s `dtw_execute()` call completes successfully (return value of zero).
- The `dtw_execute()` interface function has set the `DTW_LE_CONTINUE` flag in the `dtw_lei_t` structure.
- The previous `dtw_getNextRow()` interface function call has set the `DTW_LE_CONTINUE` flag in the `dtw_lei_t` structure.

When the `dtw_execute()` function sets the `DTW_LE_CONTINUE` flag to on and the return code is 0, `Net.Data` performs the following steps:

1. Processes the REPORT block header.

2. Calls language environment's `dtw_getNextRow()` interface function to retrieve a row.
3. Processes the message block for the return value of the `dtw_getNextRow()` interface function.
4. Processes the ROW block.
5. Determines whether `dtw_getNextRow()` has turned on the `DTW_LE_CONTINUE` flag:
  - If yes, processing continues with the `dtw_getNextRow()` interface function call in step 2.
  - If no, the REPORT block footer is processed and `Net.Data` continues processing the macro.

When `dtw_getNextRow()` is called, the `row` field in the `dtw_lei_t` structure is set to point to a row object. To manipulate the row object, use the `Net.Data` utility functions, `dtw_row_SetCols()` and `dtw_row_SetV()`. `Net.Data` assumes that after the first call to the `dtw_getNextRow()` interface function the row object contains the column headings for the table. Subsequent calls contain the actual table data.

The `dtw_getNextRow()` function continues to be called as long as `DTW_LE_CONTINUE` is set in the `flags` field and the return code is 0. If the return code is not zero, `Net.Data` checks the global and local MESSAGE blocks to decide the next course of action. If no MESSAGE block exists, or `Net.Data` could not find a matching entry in any MESSAGE block, `Net.Data` will continue processing if the return code is positive, or it will end macro processing if the return code is negative.

### **`dtw_cleanup()`**

#### **Format:**

```
int dtw_cleanup(dtw_lei_t *);
```

Use the `dtw_cleanup()` interface function to cleanup the language environment. Consider using this interface function if you use `dtw_initialize()` to allocate resources. Use this function for such tasks as disconnecting from a database or releasing resources. This interface function is optional.

While handling a `Net.Data` request, `Net.Data` calls a language environment's `dtw_cleanup()` interface function once when macro processing ends normally or abnormally. This interface is not called if no function calls were made for the language environment.

`Net.Data` sets `DTW_END_ABNORMAL` in the `flags` field of the `dtw_lei_t` structure if the macro is terminating abnormally. The following list shows the conditions in which `Net.Data` would terminate abnormally:

- A language environment interface function indicates that a fatal error occurred by setting the DTW\_LE\_FATAL\_ERROR bit in the flags field in the dtw\_lei\_t structure.
- Net.Data encounters an unrecoverable error.
- The Net.Data macro message block processing results in an exit.

If a language environment's interface function sets the le\_opaque\_data field with a parameter to be passed between interface functions, use the dtw\_cleanup() to release the resources associated with the field when processing ends.

This interface function does not affect message block processing. If the return value is non-zero, a default message is issued; if no default message exists, Net.Data issues a warning message.

### Processing Input Parameters

The Net.Data language environments use the dtw\_execute() interface to receive and process parameters. The dtw\_execute() interface uses the dtw\_lei\_t structure, which Net.Data creates to communicate with the language environment. Use the following recommendations for input parameter processing, when writing your language environment.

- Specify any implicit parameters in the ENVIRONMENT statement for the language environment, in the Net.Data initialization file. Net.Data passes the parameters specified there on all function calls to the language environment after it passes the parameters specified by the macro writer on the FUNCTION block being executed.
- Receive input parameters to the dtw\_execute() interface as part of the dtw\_lei\_t structure. The macro writer determines the order that Net.Data passes the parameters when specifying them in the FUNCTION block definition of the Net.Data macro.

The processInputParms() routine in the program template, in “Appendix B. Language Environment Template” on page 43 shows one method of processing input parameters.

### Processing User Requests

How a language environment processes a user request depends on how the language environment receives the request. Net.Data provides several different ways for a macro to communicate a request to your language environment:

- Through the function name specified on a FUNCTION block. On every function call, Net.Data passes the function name to the language environment in the function\_name field of the dtw\_lei\_t structure.
- Through the FUNCTION block parameter list. You can specify that a parameter in the parameter list can indicate a user request. On every



function call, Net.Data passes parameters to the language environment in the `parm_data_array` field of the `dtw_lei_t` structure.

- Through the executable-statements section of a FUNCTION block. On every function call, Net.Data passes any executable statements specified in the FUNCTION block to the language environment in the `exec_statement` field of the `dtw_lei_t` structure.
- Through the function's EXEC block. If a macro specifies a command in a function's EXEC block, Net.Data passes the command to the language environment in the `exec_statement` field of the `dtw_lei_t` structure, and turns on `DTW_STMT_EXEC` in the `flags` field of the `dtw_lei_t` structure.

### Returning Result Sets to the Caller

A variable specified on the RETURNS clause of a FUNCTION block is added to the parameter list, after the parameters from the function block and before any parameters from the ENVIRONMENT statement. If the language environment sets a value for this variable, the value will be returned to the caller. If the function call to the language environment is a parameter to another function call, this result will be passed as the parameter. If the function call is part of a literal string or a dynamic variable reference, then the result will become part of the string that Net.Data resolves. Otherwise, Net.Data will print the result to the Web server.

### Processing OUT and INOUT Parameters

The method you use to process output and input-output parameters depends entirely on your language environment and how it processes user requests. However, once the language environment has the data it needs to return to the Net.Data macro, you can design the language environment to modify the values of parameters passed in the `parm_data_array` field of the `dtw_lei_t` structure. The `processOutputParms()` routine in the program template, in “Appendix B. Language Environment Template” on page 43, shows one possible way of processing output and input-output parameters, as well as examples of how to set both string and table parameter values.

### Communicating Error Conditions

The success or failure of a function call can be communicated to Net.Data by the return value of an interface function. How Net.Data processes the error code depends on the interface function that is called.

#### `dtw_initialize()`

A positive or zero return code means that processing continues; a negative return code means that processing does not continue. If the return code is not zero and a default message is defined in the `default_error_message` field of the `dtw_lei_t` structure, Net.Data issues the default message; if no default message exists, Net.Data issues an error message.

## **dtw\_cleanup()**

If the return code is non-zero and a default message is defined in the `default_error_message` field of the `dtw_lei_t` structure, Net.Data issues the default message; if no default message exists, Net.Data issues a warning message.

## **dtw\_execute() and dtw\_getNextRow()**

A positive or zero return code means that processing continues; a negative return code means that processing does not continue. If the return code is not zero, Net.Data processes the MESSAGE blocks. If you do not specify a MESSAGE block or do not have an entry in a specified MESSAGE block to handle the return code, Net.Data displays the contents of the `default_error_message` field of the `dtw_lei_t` structure. This field can be set by the language environment at any time in the `dtw_execute()` or `dtw_getNextRow()` routines. The `setErrorMessage()` routine in the program template (“Appendix B. Language Environment Template” on page 43) shows an example of how to set the `default_error_message` field.

---

## **Language Environment Communication Structures**

Net.Data uses two structures to communicate with your language environment. Your language environment must work with these structures to receive information from and to pass information to Net.Data.

- `dtw_lei_t`
- `dtw_parm_data_t`

Net.Data passes a structure of type `dtw_lei_t` to the language environment function that it calls. The structure contains, among other things, an array that contains a list of parameters to the language environment function. The language environment called by Net.Data processes the request, updates the parameters in the parameter array (if applicable), and returns to Net.Data.

Net.Data then goes through the parameter array, updates its copies of the output and input-output parameters to reflect the new values set by the language environment function, and continues processing the Net.Data macro.

### **The `dtw_lei_t` Structure**

The interface function of each language environment receives a pointer to the `dtw_lei_t` structure. The `dtw_lei_t` structure has the following format:

```
typedef struct dtw_lei_t {
    char *function_name;          /* Lang. Env. Interface */
    int  flags;                  /* Function block name */
                                /* Lang. Env. Interface flags */

    char *exec_statement;       /* Lang. Env. statement(s) */

    dtw_parm_data_t *parm_data_array; /* Parameter array */
    char *default_error_message; /* Default message */
}
```

```

void *le_opaque_data;           /* Lang. Env. specific data */
void *row;                      /* For row-at-a-time processing*/
char reserved[64];             /* Reserved */
} dtw_lei_t;

```

### Fields in the `dtw_lei_t` structure:

#### **function\_name**

The `function_name` field contains a pointer to a string containing the name of the function block. This can be useful to specify the FUNCTION block name in error messages displayed by the language environment. This pointer should not be freed or modified, and the string contents should not be modified.

#### **flags**

The `flags` field is used by `Net.Data` to communicate with the language environment. Specify the `flags` field by performing an OR operation using the following constants:

- `Net.Data` sets `DTW_STMT_EXEC` to tell the `dtw_execute()` interface function that the `exec_statement` field contains the file name and parameters from an EXEC statement.
- `DTW_END_ABNORMAL` is set by `Net.Data` to tell the `dtw_cleanup()` interface function that an abnormal or unexpected condition has occurred and that `Net.Data` is halting execution of the macro.
- `DTW_LE_FATAL_ERROR` is set by a language environment interface function to tell `Net.Data` that a fatal error has occurred in the language environment. If this flag is set, `Net.Data` stops processing the `Net.Data` macro, calls `dtw_cleanup()` for all active language environments with `DTW_END_ABNORMAL` set in the `flags` field, prints the default message, and exits. The flag is verified only if a non-zero return value is returned on a language environment call.
- `DTW_LE_MSG_KEEP` is set by a language environment interface function to tell `Net.Data` that the storage pointed to by `default_error_message` should not be freed. If this constant is not set, `Net.Data` attempts to free the storage.
- `DTW_LE_CONTINUE` is set by the `dtw_execute()` interface function to tell `Net.Data` to call the `dtw_getNextRow()` interface function. `Net.Data` calls `dtw_getNextRow()` only if the flag is set and the return value from the call to the `dtw_execute()` interface function is zero. `Net.Data` will continue to call `dtw_getNextRow()` until `DTW_LE_CONTINUE` is not set in the `flags` field.

#### **exec\_statement**

The `exec_statement` field contains one of the following pointers:

- To a string containing the executable statements (after variable substitution) from the FUNCTION block.
- To the file name and parameters from an EXEC statement. If DTW\_STMT\_EXEC is set in the flags field, the exec\_statement field contains a filename.

The pointer should not be freed or modified, and the statement's contents should not be modified

### **parm\_data\_array**

The parm\_data\_array field contains a pointer to an array of dtw\_parm\_data\_t structures. The array ends with a parm\_data structure containing zeros. The dtw\_parm\_data\_t structure is used by Net.Data to pass variables and the associated value to a language environment and to retrieve any changes to the variable value that may be made by the language environment. See “The dtw\_parm\_data\_t Structure” on page 11 for a description of the structure.

### **default\_error\_message**

The default\_error\_message field is set by the language environment to a character string that describes an error condition. If the return value from a call to a language environment interface function is non-zero and the return value does not match the value of a message in a MESSAGE block, the default message is displayed. Otherwise, Net.Data displays the message selected from the MESSAGE block.

Net.Data will free the space to which default\_error\_message points. To prevent Net.Data from freeing this storage, ensure that DTW\_LE\_MSG\_KEEP is set in the flags field.

### **le\_opaque\_data**

The le\_opaque\_data field is set by any of the interface functions in the language environment to pass parameters from one interface function to another. Net.Data saves the pointer and passes it to every other interface function that Net.Data calls. On each request, Net.Data initializes le\_opaque\_data to NULL before the first call to the language environment. This field can be used to store data relevant to the current request and cannot be used to share data with other requests. Use this field only if you have a dtw\_cleanup() interface function, so that the function can free the storage associated with the le\_opaque\_data field.

**row** The row field is set by Net.Data to a row object prior to calling a language environment's dtw\_getNextRow() interface function. The dtw\_getNextRow() function inserts a row of table data in the object using the Net.Data row utility interface functions. Net.Data then processes the row and calls dtw\_getNextRow() until the language environment indicates no more rows are left to process.

The reserved field is for IBM use only.

## The `dtw_parm_data_t` Structure

Net.Data uses the `dtw_parm_data_t` structure to pass parameters to a language environment. Parameters are obtained from three sources:

- Explicit parameters that are specified on the FUNCTION block definition
- The return variable that is specified in the RETURNS clause on a FUNCTION block definition
- Parameters that are specified on the ENVIRONMENT configuration statement in the Net.Data initialization file

Net.Data passes explicit parameters first, followed by the return variable, and then the parameters specified on the ENVIRONMENT statement.

The `dtw_parm_data_t` structure has the following format:

```
typedef struct dtw_parm_data_t {          /* Parameter data          */
    int   parm_descriptor;                /* Parameter descriptor    */
    char *parm_name;                      /* Parameter name          */
    char *parm_value;                     /* Parameter value         */
    void *res1;                            /* Reserved                */
    void *res2;                            /* Reserved                */
} dtw_parm_data_t;
```

### Fields in the `dtw_parm_data_t` structure:

#### **parm\_descriptor**

The `parm_descriptor` field describes the type and use of the parameter being passed to the language environment. Net.Data sets the field by performing an OR operation using the following constants:

- `DTW_IN` indicates that a parameter is an input-only parameter.
- `DTW_OUT` indicates that a parameter is an output-only parameter.
- `DTW_INOUT` indicates that a parameter is an input and output parameter.
- `DTW_STRING` indicates that parameter value is a pointer to a string.
- `DTW_TABLE` indicates that the parameter value is a pointer to a table.

Net.Data always sets the `parm_descriptor` field to `DTW_IN`, `DTW_OUT`, or `DTW_INOUT` and uses a logical OR with `DTW_STRING` or `DTW_TABLE`. Do not modify this value.

#### **parm\_name**

The `parm_name` field is a pointer to a string that contains the name of the parameter. Net.Data sets this pointer to `NULL` if the parameter is a literal string. This pointer should not be freed or modified, and the name's contents should not be modified.

### **parm\_value**

The `parm_value` field is a pointer to an object that contains the value of the parameter. This pointer is set to `NULL` by `Net.Data` if the parameter is a variable that is not already defined.

The `parm_value` field points to an object allocated from the `Net.Data` run-time *heap*, the area of memory used for dynamic memory allocation by `Net.Data`. If `parm_value` is replaced with another string, the original string must be freed and replaced with a pointer to a character string allocated from the `Net.Data` heap. Use the `dtw_malloc()` and `dtw_free()` utility functions to allocate and free character strings, and use `dtw_table_New()` and `dtw_table_Delete()` to allocate and free table objects. Table objects and character strings can also be modified without freeing and reallocating space.

The `parm_value` pointer and its contents should not be modified for input parameters. Also, do not delete or replace table objects in a parameter list.

The `res1` and `res2` fields are reserved fields.

---

## **Designing the Language Environment Statement**

Each language environment has an `ENVIRONMENT` statement in the `Net.Data` initialization file that contains information specific to that language environment. When you create a new language environment, you need to design an `ENVIRONMENT` statement for the initialization file and document how users should add it to the initialization file.

The `ENVIRONMENT` statements specify information about the language environment that `Net.Data` requires to call and load the language environment DLL or shared library, such as the language environment name, the DLL or shared library name, and the list of parameters to be passed to the language environment for each function call.

`Net.Data` reads the configuration information when it is invoked, but does not load language environment DLLs or shared libraries until a `FUNCTION` block identifying that language environment is called from within the macro. The DLL remains loaded as long as `Net.Data` is loaded.

The following sections provide information about syntax, parameter descriptions, and examples that you can use in your documentation.

### **ENVIRONMENT Statement Syntax**

An `ENVIRONMENT` statement has the following format:

```
ENVIRONMENT(type) library-name ([specification parameterN, ...])
```

Each ENVIRONMENT statement must be on a single line.

The following are the parameters you must specify for each language environment:

- *type*

The name that associates this language environment with a FUNCTION block definition in a Net.Data macro. You use this name on a FUNCTION block definition to associate the function with the language environment. See the "Function Block" section in *Net.Data Reference* for more information about the FUNCTION block.

**Important:** The name cannot begin with the prefix DTW. This prefix is reserved for language environments shipped with Net.Data. If you use the DTW prefix, Net.Data cannot load your language environment DLL.

- *library\_name*

The name of the object containing the language environment interfaces that are called by Net.Data. The file extension is different for each operating system:

- In AIX<sup>®</sup>, the name of the shared library is specified with the *.o* extension.
- In HP/UX, the name of the shared library is specified with the *.sl* extension
- In OS/2<sup>®</sup> and Windows NT, the DLL name is specified with the *.dll* extension.
- In OS/390<sup>®</sup>, the DLL name is specified with any extension.
- In OS/400<sup>®</sup>, the service program name is specified with the *.SRVPGM* extension.

In SUN, PTX, and Linux, the name of the shared library is specified with the *.so* extension

Look at the initialization file shipped with Net.Data for your operating system to see how to specify this name. Consider using a fully qualified path name to make sure Net.Data finds the DLL or shared library.

- *specification*

The parameter passing specification that indicates whether Net.Data uses the parameter for input, output, or input and output. Possible values:

<b>IN</b>	An parameter used for input
<b>OUT</b>	A parameter used for output
<b>INOUT</b>	A parameter used for both input and output

- *parameterN*

Specifies parameters that are passed to the language environment on each function call, in addition to parameters specified in the FUNCTION block definition and in the FUNCTION block RETURNS clause. They are passed

in the *parm\_data\_array* field of the *dtw\_lei\_t* structure following the parameters specified in the FUNCTION block definition. You must define these parameters as variables in your Net.Data macro before the function call is made. If a function modifies the values of the output and input-output parameters, the parameters retain the modified value once the function finishes processing.

The following example shows an ENVIRONMENT statement for language environment called MY\_LE.

```
ENVIRONMENT (MY_LE) |elib.dll ( IN INPUT1, OUT OUTPUT1 )
```

The ENVIRONMENT statement varies slightly for each operating system; for example, the parameters used in the SQL language environment on OS/390 differs slightly from the SQL language environment on UNIX.

```
ENVIRONMENT (DTW_SQL) DTWSQL ( IN LOCATION, DB2SSID, DB2PLAN )
```

```
ENVIRONMENT (DTW_SQL) /db2www/lib/dtwsq1shr.so ( IN DATABASE, LOGIN, PASSWORD )
```

## ENVIRONMENT Statement Examples

The following examples show ENVIRONMENT statements for language environments that Net.Data supplies. These examples illustrate how to specify parameters. The variables you include in the ENVIRONMENT statements are ones that you want to allow Net.Data macro writers to define or override in their macros. See the operating system-specific information in the appendixes in *Net.Data Reference* or in your Net.Data README file or Program Directory for additional examples.

The following examples show ENVIRONMENT statements for language environments using LEDLL and LEDLL.

```
ENVIRONMENT (MY_LE) LEDLL ( IN INPUT1, OUT OUTPUT1 )  
ENVIRONMENT (MY2_LE) LEDLL2 ( )
```



---

## Chapter 2. The Language Environment Programming Interface Utility Functions

Net.Data provides a programming interface for you to use when designing a new language environment. The language environment interface has utility functions that access Net.Data services that manage memory and configuration variables, and provide table and row manipulation features. “Appendix B. Language Environment Template” on page 43 provides a template that you can use as a model when designing your language environment.

The following section explains the Net.Data language environment interface utility functions.

---

### Language Environment Utility Functions

Language environments use utility functions to access Net.Data services. These functions fall into four categories:

- “Utility Functions for Managing Memory”
- “Utility Functions for Managing Configuration Variables” on page 16
- “Utility Functions for Table Manipulation” on page 16
- “Utility Functions for Row Manipulation” on page 17

#### Utility Functions for Managing Memory

Language environments use the memory management utility functions to allocate storage owned by Net.Data, and to free storage that it allocated using the Net.Data run-time library.

The following example illustrates the need for these utility functions. Suppose that Net.Data is written using compiler A, with its corresponding run-time library. A programmer writes a new language environment, but uses compiler B, which has a different run-time library. The language environment cannot free storage that Net.Data allocated, and Net.Data cannot free storage that was allocated by the language environment because of potential incompatibilities between the two run-time libraries.

*Table 1. Memory Management Utility Functions*

Utility Function	Description
“dtw_malloc()” on page 20	Allocate storage from Net.Data’s run-time heap using dtw_malloc().
“dtw_free()” on page 18	Free storage allocated from Net.Data’s run-time heap using dtw_malloc().

Table 1. Memory Management Utility Functions (continued)

Utility Function	Description
“dtw_strdup()” on page 23	Allocate storage from Net.Data’s run-time heap and copy the specified string into the allocated storage using dtw_malloc().

## Utility Functions for Managing Configuration Variables

The management utility functions for the configuration variables let language environments access configuration information stored in the Net.Data initialization file. Using these functions, all language environments can share the Net.Data initialization file and use information in it for configuring language environments.

Table 2. Configuration Utility Functions

Utility Function	Description
“dtw_getvar()” on page 19	Retrieve the value of a configuration variable from the Net.Data initialization file.

## Utility Functions for Table Manipulation

Use the table functions to manipulate any Net.Data macro table variables that are passed to the language environment.

Row and column numbers begin with one (1).

Table 3. Table Utility Functions

Utility Function	Description
“dtw_table_New()” on page 34	Create a table object.
“dtw_table_Delete()” on page 26	Delete a table object.
“dtw_table_SetCols()” on page 37	Set the width of a table and allocate storage for the column headers.
“dtw_table_GetV()” on page 30	Retrieve a table value.
“dtw_table_SetV()” on page 39	Set a table value.
“dtw_table_GetN()” on page 29	Retrieve a table column heading.
“dtw_table_SetN()” on page 38	Set a table column heading.
“dtw_table_Rows()” on page 36	Retrieve the current number of rows in a table.

Table 3. Table Utility Functions (continued)

Utility Function	Description
“dtw_table_Cols()” on page 25	Retrieve the current number of columns in a table.
“dtw_table_MaxRows()” on page 33	Retrieve the maximum allowable number of rows in a table.
“dtw_table_QueryColnoNj()” on page 35	Retrieve the column number of a column.
“dtw_table_AppendRow()” on page 24	Add one or more rows to the end of a table.
“dtw_table_InsertRow()” on page 32	Insert one or more rows in a table.
“dtw_table_DeleteRow()” on page 28	Delete one or more rows from a table.
“dtw_table_InsertCol()” on page 31	Insert one or more columns in a table.
“dtw_table_DeleteCol()” on page 27	Delete one or more columns from a table.

## Utility Functions for Row Manipulation

The row utility functions manipulate the row object that is passed to a language environment’s `dtw_getNextRow()` interface function during row-at-a-time processing.

Row numbers begin with one (1).

Table 4. Row Utility Functions

Utility Function	Description
“dtw_row_SetCols()” on page 21	Set the width of a row.
“dtw_row_SetV()” on page 22	Set a table value.

---

## Utility Functions Syntax Reference

This section describes each of the utility functions, their format, usage, and parameters, as well as providing a simple example.

## dtw\_free()

### Usage

Frees storage that was allocated from Net.Data's run-time heap using `dtw_malloc()`. The buffer points to the allocated storage to free.

### Format

```
void dtw_free(void *buffer)
```

### Parameters

*buffer*                                      A pointer to the allocated storage to free.

### Examples

```
char *myBuf;  
long nbytes = 8192;  
  
myBuf = (char *)dtw_malloc(nbytes);  
  
dtw_free((void *)myBuf);
```

## **dtw\_getvar()**

### **Usage**

Retrieves the value of a configuration variable specified by *var\_name* from the Net.Data initialization file. Net.Data owns the memory returned by dtw\_getvar(); do not modify or free it.

### **Format**

```
char *dtw_getvar(char *var_name)
```

### **Parameters**

*var\_name*    The name of the configuration variable to retrieve.

### **Examples**

```
char *myBindFile;  
  
myBindFile = dtw_getvar("BIND_FILE");
```



## **dtw\_row\_SetCols()**

### **Usage**

Assigns the width of the row and allocates storage for the column headings. You can use the `dtw_row_SetCols()` utility function once for each row.

### **Format**

```
int dtw_row_SetCols(void *row, int cols)
```

### **Parameters**

<i>row</i>	A pointer to a newly created row which has not yet allocated any columns.
<i>cols</i>	The initial number of columns to allocate in the new row.

### **Examples**

```
void *myRow;
```

```
rc = dtw_row_SetCols(myRow, 5);
```

## **dtw\_row\_SetV()**

### **Usage**

Assigns a table value. The caller of the `dtw_row_SetV()` utility function retains ownership of the memory pointed to by `src`. To delete the current table value, assign the value to `NULL`.

### **Format**

```
int dtw_row_SetV(void *row, char *src, int col)
```

### **Parameters**

<i>row</i>	A pointer to the row to modify.
<i>src</i>	A character string containing the new value to set.
<i>col</i>	The column number of the value to set.

### **Examples**

```
void *myTable;  
char *myFieldValue = "newValue";  
  
rc = dtw_row_SetV(myRow, myFieldValue, 3);
```



## dtw\_strdup()

### Usage

Allocates storage from Net.Data's run-time heap and copies the string specified by *string* into the allocated storage using `dtw_malloc()`. If Net.Data cannot return the requested storage, it returns a NULL pointer.

### Format

```
char *dtw_strdup(char *string)
```

### Parameters

<i>string</i>	A pointer to the string value to copy into the storage allocated.
---------------	---

### Examples

```
char *myString = "This string will be duplicated.";
char *myDupString;

myDupString = dtw_strdup(myString);
```

## dtw\_table\_AppendRow()

### Usage

Adds one or more rows to the end of the table. Assign the table values of the new rows with the dtw\_table\_SetV() utility after rows are appended to the table.

### Format

```
int dtw_table_AppendRow(void *table, int rows)
```

### Parameters

<i>table</i>	A pointer to the table to be appended to.
<i>rows</i>	The number of rows to append.

### Examples

```
void *myTable;  
  
rc = dtw_table_AppendRow(myTable, 10);
```

## **dtw\_table\_Cols()**

### **Usage**

Returns the current number of columns in the table.

### **Format**

```
int dtw_table_Cols(void *table)
```

### **Parameters**

<i>table</i>	A pointer to the table whose current number of columns is returned.
--------------	---

### **Examples**

```
void *myTable;  
int currentColumns;  
  
currentColumns = dtw_table_Cols(myTable);
```



## dtw\_table\_DeleteCol()

### Usage

Deletes one or more columns beginning at the column specified in *start\_col*. To delete all of the rows and columns of a table, substitute the utility function `dtw_table_Cols()` for the *cols* parameter.

```
dtw_table_DeleteCol(table, 1, dtw_table_Cols());
```

### Format

```
int dtw_table_DeleteCol(void *table, int start_col, int cols)
```

### Parameters

<i>table</i>	A pointer to the table to modify.
<i>start_col</i>	The column number of the first column to delete.
<i>rows</i>	The number of columns to delete.

### Examples

```
void *myTable;
```

```
rc = dtw_table_DeleteCol(myTable, 1, 10);
```

## dtw\_table\_DeleteRow()

### Usage

Deletes one or more rows beginning at the row specified in *start\_row*.

### Format

```
int dtw_table_DeleteRow(void *table, int start_row, int rows)
```

### Parameters

<i>table</i>	A pointer to the table to modify.
--------------	-----------------------------------

---

<i>start_row</i>	The row number of the first row to delete.
------------------	--

---

<i>rows</i>	The number of rows to delete.
-------------	-------------------------------

### Examples

```
void *myTable;
```

```
rc = dtw_table_DeleteRow(myTable, 3, 10);
```

## dtw\_table\_GetN()

### Usage

Retrieves a column heading. Net.Data owns the memory pointed to by *dest*; do not modify or free it.

### Format

```
int dtw_table_GetN(void *table, char **dest, int col)
```

### Parameters

<i>table</i>	A pointer to the table from which a column heading is retrieved.
<i>dest</i>	A pointer to the character string to contain the column heading.
<i>col</i>	The column number of the column heading.

### Examples

```
void *myTable;  
char *myColumnHeading;  
  
rc = dtw_table_GetN(myTable, &myColumnHeading, 5);
```

## dtw\_table\_GetV()

### Usage

Retrieves a value from a table. Net.Data owns the memory pointed to by *dest*; do not modify or free it.

### Format

```
int dtw_table_GetV(void *table, char **dest, int row, int col)
```

### Parameters

<i>table</i>	A pointer to the table from which a value is retrieved.
<i>dest</i>	A pointer to the character string that is to contain the value.
<i>row</i>	The row number of the value to retrieve.
<i>col</i>	The column number of the value to retrieve.

### Examples

```
void *myTable;  
char *myTableValue;
```

```
rc = dtw_table_GetV(myTable, &myTableValue, 3, 5);
```



## dtw\_table\_InsertCol()

### Usage

Inserts one or more columns after the specified column.

### Format

```
int dtw_table_InsertCol(void *table, int after_col, int cols)
```

### Parameters

<i>table</i>	A pointer to the table to modify.
<i>after_col</i>	The number of the column after which the new columns are to be inserted. To insert columns at the beginning of the table, specify 0.
<i>cols</i>	The number of columns to insert.

### Examples

```
void *myTable;
```

```
rc = dtw_table_InsertCol(myTable, 3, 10);
```

## dtw\_table\_InsertRow()

### Usage

Inserts one or more rows after the specified row.

### Format

```
int dtw_table_InsertRow(void *table, int after_row, int rows)
```

### Parameters

<i>table</i>	A pointer to the table to modify.
<i>after_row</i>	The number of the row after which the new rows are inserted. To insert rows at the beginning of the table, specify 0.
<i>rows</i>	The number of rows to insert.

### Examples

```
void *myTable;
```

```
rc = dtw_table_InsertRow(myTable, 3, 10);
```

## **dtw\_table\_MaxRows()**

### **Usage**

Returns the maximum number of rows allowed for the Net.Data table as defined by the `dtw_table_New()` utility function's parameter, *row\_lim*.

### **Format**

```
int dtw_table_MaxRows(void *table)
```

### **Parameters**

<i>table</i>	A pointer to the table from which the maximum number of rows is returned.
--------------	---

### **Examples**

```
void *myTable;  
int maximumRows;  
  
maximumRows = dtw_table_MaxRows(myTable);
```

## dtw\_table\_New()

### Usage

Creates a Net.Data table object and initializes all column headings and field values to NULL. The caller specifies the initial number of rows and columns, and the maximum number of rows. If the initial number of rows and columns is 0, you must use the `dtw_table_SetCols()` function to specify the number of fields in a row before any table function calls.

### Format

```
int dtw_table_New(void **table, int rows, int cols, int row_lim)
```

### Parameters

<i>table</i>	The name of the new table.
<i>rows</i>	The initial number of rows to allocate in the new table.
<i>cols</i>	The initial number of columns to allocate in the new table.
<i>row_lim</i>	The maximum number of rows this table can contain.

### Examples

```
void *myTable;  
  
rc = dtw_table_New(&myTable, 20, 5, 100);
```

## dtw\_table\_QueryColnoNj()

### Usage

Returns the column number associated with a column heading.

### Format

```
int dtw_table_QueryColnoNj(void *table, char *name)
```

### Parameters

<i>table</i>	A pointer to the table to query.
<i>name</i>	A character string specifying the column heading for which the column number is returned. If the column heading does not exist in the table, 0 is returned.

### Examples

```
void *myTable;  
int columnNumber;  
  
columnNumber = dtw_table_QueryColnoNj(myTable, "column 1");
```



## dtw\_table\_SetCols()

### Usage

Sets the number of columns of the table and allocates storage for the column headings. Specify the column headings when the table is created; otherwise, you must specify them by calling this utility function before using any other table functions. You can only use the `dtw_table_SetCols()` utility function once for a table. Afterwards, use the `dtw_table_DeleteCol()` or `dtw_table_InsertCol()` utility functions.

### Format

```
int dtw_table_SetCols(void *table, int cols)
```

### Parameters

<i>table</i>	A pointer to a new table that has no columns or rows allocated.
<i>cols</i>	The initial number of columns to allocate in the new table.

### Examples

```
void *myTable;  
  
rc = dtw_table_SetCols(myTable, 5);
```

## dtw\_table\_SetN()

### Usage

Assigns a name to a column heading. The caller of the `dtw_table_SetN()` utility function retains ownership of the memory pointed to by the `src` parameter. To delete the column heading, assign the column heading value to `NULL`.

### Format

```
int dtw_table_SetN(void *table, char *src, int col)
```

### Parameters

<i>table</i>	A pointer to the table whose column heading is assigned.
<i>src</i>	A character string being assigned to the new column heading.
<i>col</i>	The number of the column.

### Examples

```
void *myTable;  
char *myColumnHeading = "newColumnHeading";  
  
rc = dtw_table_SetN(myTable, myColumnHeading, 5);
```



## dtw\_table\_SetV()

### Usage

Assigns a value in a table. The caller of the `dtw_table_SetV()` utility function retains ownership of the memory pointed to by the `src` parameter. To delete the table value, assign the value to `NULL`.

### Format

```
int dtw_table_SetV(void *table, char *src, int row, int col)
```

### Parameters

<i>table</i>	A pointer to the table whose value is being assigned.
<i>src</i>	A character string assigned to the new value.
<i>row</i>	The row number of the new value.
<i>col</i>	The column number of the new value.

### Examples

```
void *myTable;  
char *myTableValue = "newValue";  
  
rc = dtw_table_SetV(myTable, myTableValue, 3, 5);
```



---

## Appendix A. Net.Data Technical Library

The Net.Data Technical Library is available from the Net.Data Web site at <http://www.ibm.com/software/data/net.data/library.html>

<b>Document</b>	<b>Description</b>
<ul style="list-style-type: none"><li>• <i>Net.Data Administration and Programming Guide for OS/390</i></li><li>• <i>Net.Data Administration and Programming Guide for OS/2, Windows NT, and UNIX</i></li><li>• <i>Net.Data Administration and Programming Guide for OS/400</i></li></ul>	Contains conceptual and task information about installing, configuring, and invoking Net.Data. Also describes how to write Net.Data macros, use Net.Data performance techniques, use Net.Data language environments, manage connections, and use Net.Data logging and traces for trouble shooting and performance tuning.
<i>Net.Data Reference</i>	Describes the Net.Data macro language, variables, and built-in functions.
<i>Net.Data Language Environment Interface Reference</i>	Describes the Net.Data language environment interface.
<i>Net.Data Messages and Codes Reference</i>	Lists Net.Data error messages and return codes.



---

## Appendix B. Language Environment Template

Use this template to create your own language environments.

```
/******  
/*  
/* File Name  
/*  
/* Description  
/*  
/* Functions  
/*  
/* Entry Points  
/*  
/* Change Activity  
/*  
/* Flag Reason Date Developer Description  
/* -----  
/*  
/******  
  
/*-----*/  
/* Includes  
/*-----*/  
#include "dtwle.h"
```

*Figure 2. Language Environment Template (Part 1 of 14)*

```

#ifdef __MVS__
#pragma export(dtw_initialize)
#pragma export(dtw_execute)
#pragma export(dtw_getNextRow)
#pragma export(dtw_cleanup)
#endif

#ifdef _AIX_
/*-----*/
/* Function */
/* dtw_getFp */
/* */
/* Purpose */
/* Set function pointers to all Language Environment Interface */
/* routines being provided by this Language Environment. If a */
/* routine in the structure is not being provided, set that field */
/* to NULL. */
/* */
/* Format */
/* int dtw_getFp(dtw_fp_t *func_pointer) */
/* */
/* Parameters */
/* func_pointer A pointer to a structure which will contain */
/* function pointers for all functions provided */
/* by this language environment. */
/* */
/* Returns */
/* Success ..... 0 */
/* Failure ..... -1 */
/*-----*/
int dtw_getFp(dtw_fp_t *func_pointer)
{
    func_pointer->dtw_initialize_fp = dtw_initialize;
    func_pointer->dtw_execute_fp = dtw_execute;
    func_pointer->dtw_getNextRow_fp = dtw_getNextRow;
    func_pointer->dtw_cleanup_fp = dtw_cleanup;
    return 0;
}
#endif

```

Figure 2. Language Environment Template (Part 2 of 14)

```

/*-----*/
/*
/* Function
/* dtw_initialize
/*
/* Purpose
/*
/* Format
/* int dtw_initialize(dtw_lei_t *le_interface)
/*
/* Parameters
/* le_interface A pointer to a structure containing the
/* following fields:
/*
/* function_name
/* flags
/* exec_statement
/* parm_data_array
/* default_error_message
/* le_opaque_data
/* row
/*
/* Returns
/* Success ..... 0
/* Failure ..... 0
/*-----*/
int dtw_initialize(dtw_lei_t *le_interface)
{
    return rc;
}

```

Figure 2. Language Environment Template (Part 3 of 14)

```

/*-----*/
/*                                          */
/* Function                                */
/*   dtw_execute                           */
/*                                          */
/* Purpose                                 */
/*                                          */
/* Format                                  */
/*   int dtw_execute(dtw_lei_t *le_interface) */
/*                                          */
/* Parameters                              */
/*   le_interface      A pointer to a structure containing the */
/*                     following fields:                */
/*                                          */
/*     function_name  */
/*     flags          */
/*     exec_statement */
/*     parm_data_array */
/*     default_error_message */
/*     le_opaque_data */
/*     row            */
/*                                          */
/* Returns                                          */
/*   Success ..... 0 */
/*   Failure ..... 0 */
/*-----*/
int dtw_execute(dtw_lei_t *le_interface)
{
    /*-----*/
    /* Determine if %exec statement was specified. */
    /*-----*/
    if (le_interface->flags & DTW_STMT_EXEC) {
        /*-----*/
        /* Parse the %exec statement                */
        /*-----*/
        rc = processExecStmt(le_interface->exec_statement);
        if (rc)
            {
            }
        }
    else {
        /*-----*/
        /* Parse the inline data                    */
        /*-----*/
        rc = processInlineData(le_interface->exec_statement);
        if (rc)
            {
            }
        }
    }
}

```

Figure 2. Language Environment Template (Part 4 of 14)



```

/*-----*/
/* Parse the input parameters */
/*-----*/
rc = processInputParms(le_interface->parm_data_array);
if (rc)
{
}
/*-----*/
/* Process the request */
/*-----*/
rc = processRequest();
if (rc)
{
}
/*-----*/
/* Process the output data */
/*-----*/
rc = processOutputParms(le_interface->parm_data_array);
if (rc)
{
}
/*-----*/
/* Process the return code and default error message */
/*-----*/
if (rc)
{
    setErrorMessage(rc, &(le_interface->default_error_message));
}
/*-----*/
/* Cleanup and exit program. */
/*-----*/
return rc;
}

```

Figure 2. Language Environment Template (Part 5 of 14)

```

/*-----*/
/*                                          */
/* Function                                */
/*   dtw_getNextRow                        */
/*                                          */
/* Purpose                                */
/*                                          */
/* Format                                  */
/*   int dtw_getNextRow(dtw_lei_t *le_interface) */
/*                                          */
/* Parameters                              */
/*   le_interface      A pointer to a structure containing the */
/*                     following fields:                */
/*                                          */
/*     function_name  */
/*     flags           */
/*     exec_statement */
/*     parm_data_array */
/*     default_error_message */
/*     le_opaque_data */
/*     row             */
/*                                          */
/* Returns                                          */
/*   Success ..... 0 */
/*   Failure ..... 0 */
/*-----*/
int dtw_getNextRow(dtw_lei_t *le_interface)
{
    return rc;
}

```

Figure 2. Language Environment Template (Part 6 of 14)

```

/*-----*/
/*
/* Function
/*   dtw_cleanup
/*
/* Purpose
/*
/* Format
/*   int dtw_cleanup(dtw_lei_t *le_interface)
/*
/* Parameters
/*   le_interface   A pointer to a structure containing the
/*                  following fields:
/*
/*     function_name
/*     flags
/*     exec_statement
/*     parm_data_array
/*     default_error_message
/*     le_opaque_data
/*     row
/*
/* Returns
/*   Success ..... 0
/*   Failure ..... 0
/*-----*/
int dtw_cleanup(dtw_lei_t *le_interface)
{
    /*-----*/
    /* Determine if this is normal or abnormal termination.
    /*-----*/
    if (le_interface->flags & DTW_END_ABNORMAL) {
        /*-----*/
        /* Do abnormal termination cleanup.
        /*-----*/
    }
    else {
        /*-----*/
        /* Do normal termination cleanup.
        /*-----*/
    }

    return rc;
}

```

Figure 2. Language Environment Template (Part 7 of 14)

```

/*-----*/
/*                                          */
/* Function                                */
/*   processInputParms                    */
/*                                          */
/* Purpose                                  */
/*                                          */
/* Format                                    */
/*   unsigned long processInputParms(dtw_parm_data_t *parm_data) */
/*                                          */
/* Parameters                              */
/*   dtw_parm_data_t *parm_data          */
/*                                          */
/* Returns                                  */
/*   Success ..... 0                     */
/*   Failure .....                       */
/*                                          */
/*-----*/
unsigned long processInputParms(dtw_parm_data_t *parm_data)
{
    /*-----*/
    /* Loop through all the variables in the parameter data array. */
    /* The array is terminated by a NULL entry, meaning the parm_name */
    /* field is set to NULL, the parm_value field is set to NULL, and */
    /* the parm_descriptor field is set to 0. However, the only valid */
    /* check for the end of the parameter data array is to check */
    /* parm_descriptor == 0, since the parm_name field is NULL when a */
    /* literal string is passed in, and the parm_value field is set */
    /* to NULL when an undeclared variable is passed in. */
    /*-----*/
    for (; parm_data->parm_descriptor != 0; ++parm_data) {

```

Figure 2. Language Environment Template (Part 8 of 14)

```

/*-----*/
/* Determine the usage of each input parameter.      */
/*-----*/
switch(parm_data->parm_descriptor & DTW_USAGE) {

    case(DTW_IN):
        /*-----*/
        /* Determine the type of each input parameter.  */
        /*-----*/
        switch (parm_data->parm_descriptor & DTW_TYPE) {
            case DTW_STRING:
                break;
            case DTW_TABLE:
                break;
            default:
                /*-----*/
                /* Internal error - unknown data type      */
                /*-----*/
                break;
        }
        break;

    case(DTW_OUT):
        break;

    case(DTW_INOUT):
        break;

    default:
        /*-----*/
        /* Internal error - unknown usage                    */
        /*-----*/
        break;
}
}
return rc;
}

```

Figure 2. Language Environment Template (Part 9 of 14)

```

/*-----*/
/*                                          */
/* Function                                */
/*   processOutputParms()                 */
/*                                          */
/* Purpose                                  */
/*                                          */
/* Format                                    */
/*   unsigned long processOutputParms(dtw_parm_data_t *parm_data) */
/*                                          */
/* Parameters                               */
/*   dtw_parm_data_t *parm_data           */
/*                                          */
/* Returns                                  */
/*   Success ..... 0                      */
/*   Failure ..... -1                     */
/*                                          */
/*-----*/
unsigned long processOutputParms(dtw_parm_data_t *parm_data) {
    /*-----*/
    /* Get output data in some language environment-specific manner. */
    /* This is entirely dependent on what the language environment    */
    /* is interfacing to, and how the LE chooses to interface to it. */
    /*-----*/
}

```

Figure 2. Language Environment Template (Part 10 of 14)

```

/  /*-----*/
/* Loop through all the parms in the parameter data array,      */
/* looking for output parameters.                                */
/*-----*/
for (; parm_data->parm_descriptor != 0; ++parm_data) {

    /*-----*/
    /* Determine usage of each parameter.                        */
    /*-----*/
    if (pd_i->parm_descriptor & DTW_OUT) {
        /*-----*/
        /* Determine the type of each input parameter.          */
        /*-----*/
        switch (pd_i->parm_descriptor & DTW_TYPE) {
            case DTW_STRING:
                /*-----*/
                /* Give a string parameter a new value. If the   */
                /* parameter value is not currently NULL, the    */
                /* storage must be freed using an LE interface  */
                /* utility function if it was allocated by      */
                /* Net.Data.                                    */
                /*-----*/
                if (parm_data->parm_value != NULL)
                    dtw_free(parm_data->parm_value);
                parm_data->parm_value = dtw_strdup(newValue);
                break;
            case DTW_TABLE:
                /*-----*/
                /* Change the size of a table parameter. Use the */
                /* LE interface utility functions to modify the  */
                /* table object.                                  */
                /*-----*/
                /*-----*/
                /* First get the pointer to the table object.   */
                /*-----*/
                void *myTable = (void *) parm_data->parm_value;

```

Figure 2. Language Environment Template (Part 11 of 14)

```

/*-----*/
/* Next get the current size of the table.      */
/*-----*/
cols = dtw_table_Cols(myTable);
rows = dtw_table_Rows(myTable);
/*-----*/
/* Now set the new size (assumes the new size   */
/* values are valid).                          */
/*-----*/

/*-----*/
/* Set the columns first.                      */
/*-----*/
if (cols > newColValue)
{
    dtw_table_DeleteCol(myTable,
                        newColValue + 1,
                        cols - newColValue);
}
else if (cols < new_col_value)
{
    dtw_table_InsertCol(myTable,
                       cols,
                       newColValue - cols);
}

/*-----*/
/* Now set the rows.                          */
/*-----*/
if (newColValue > 0) {
    if (rows > newRowValue)
    {
        dtw_table_DeleteRow(myTable,
                            newRowValue + 1,
                            rows - newRowValue);
    }
    else if (rows < new_row_value)
    {
        dtw_table_InsertRow(myTable,
                            rows,
                            newRowValue - rows);
    }
}
}

```

Figure 2. Language Environment Template (Part 12 of 14)



```

/*-----*/
/* Now get the last row/column value.          */
/*-----*/
dtw_table_GetV(myTable,
               &myValue;,
               newRowValue,
               newColValue);

/*-----*/
/* Delete the last row/column value.          */
/*-----*/
dtw_table_SetV(myTable,
               NULL,
               newRowValue,
               newColValue);

/*-----*/
/* Set the last row/column value.            */
/*-----*/
dtw_table_SetV(myTable,
               dtw_strdup(myNewValue),
               newRowValue,
               newColValue);

        break;
default:
/*-----*/
/* Internal error - unknown data type        */
/*-----*/
        break;
    }
}
}
return 0;
}

```

Figure 2. Language Environment Template (Part 13 of 14)

```

/*-----*/
/*                                     */
/* Function                             */
/*   setErrorMessage()                 */
/*                                     */
/* Purpose                               */
/*                                     */
/* Format                                */
/*   unsigned long setErrorMessage(int returnCode, */
/*                                     char **defaultErrorMessage) */
/*                                     */
/* Parameters                             */
/*   int   returnCode                 */
/*   char **defaultErrorMessage       */
/*                                     */
/* Returns                               */
/*   Success ..... 0                 */
/*   Failure ..... -1                */
/*                                     */
/*-----*/
unsigned long setErrorMessage(int returnCode,
                             char **defaultErrorMessage)
{
    /*-----*/
    /* Set the default error message based on the return code. */
    /*-----*/
    switch(returnCode) {
        case LE_SUCCESS:
            break;
        case LE_RC1:
            *defaultErrorMessage = dtw_strdup(LE_RC1_MESSAGE_TEXT);
            break;
        case LE_RC2:
            *defaultErrorMessage = dtw_strdup(LE_RC2_MESSAGE_TEXT);
            break;
        case LE_RC3:
            *defaultErrorMessage = dtw_strdup(LE_RC3_MESSAGE_TEXT);
            break;
        case LE_RC4:
            *defaultErrorMessage = dtw_strdup(LE_RC4_MESSAGE_TEXT);
            rc = LE_RC1INTERNAL;
            break;
    }
    return 0;
}

```

Figure 2. Language Environment Template (Part 14 of 14)

---

## Appendix C. Build File Examples

The following examples are provided as reference for building an LE on various operating systems. Because your particular operating system and environment has its own unique characteristics, these examples should only be used for reference. When you build your shared libraries, please consult the documentation specific to the compiler you are using on your operating system.

---

### Sample OS/390 JCL

```
//BLDUSER JOB , 'BLDUSER ', TIME=1,
// MSGCLASS=H, CLASS=A,
// USER=IBMUSER, MSGLEVEL=(1,1)
//*****
//* COMPILER STEP: C++ DLL (USER-WRITTEN LE) *
//* C/C++ FOR MVS/ESA(R) COMPILER V3 R2.0 *
//* AD/CYCLE LE/370 V1 R7.0 *
//*****
//COMPILE EXEC PGM=CBC320PP, REGION=32M,
// PARM=(' /CXX S0,OPT,EXP,SE(''CEEV1R70.SCEEH.'')',
// 'DEF(_XOPEN_SOURCE_EXTENDED)')
//STEPLIB DD DSN=CEEV1R70.SCEERUN, DISP=SHR
// DD DSN=CBCV3R20.SCBC3CMP, DISP=SHR
//SYSPRINT DD DUMMY, DSN=CBCV3R20.SCBC3MSG(EDCMSGE), DISP=SHR
//SYSMSGSGS DD DUMMY, DSN=CBCV3R20.SCBC3MSG(CBCMSGE), DISP=SHR
//SYSXMSGSGS DD DSN=IBMUSER.NETDATA.USERLANG.C(USERLANG), DISP=SHR
//SYSIN DD DSN=CBCV3R20.SCLB3H.H, DISP=SHR
//USERLIB DD DSN=IBMUSER.NETDATA.H, DISP=SHR
//SYSLIB DD DSN=IBMUSER.NETDATA.USERLANG.OBJ(USERLANG), DISP=SHR
//SYSPRINT DD SYSOUT=*
//SYSCPRT DD SYSOUT=*
//SYSTEM DD DUMMY
//SYSUT1 DD DSN=&&SYSUT1;, UNIT=SYSALLDA, DISP=(NEW,PASS),
// SPACE=(32000,(30,30)),
// DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSUT2 DD DSN=&&SYSUT2;, UNIT=SYSALLDA, DISP=(NEW,PASS),
// SPACE=(32000,(30,30)),
// DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSUT3 DD DSN=&&SYSUT3;, UNIT=SYSALLDA, DISP=(NEW,PASS),
// SPACE=(32000,(30,30)),
// DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSUT4 DD DSN=&&SYSUT4;, UNIT=SYSALLDA, DISP=(NEW,PASS),
// SPACE=(32000,(30,30)),
// DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSUT5 DD DSN=&&SYSUT5;, UNIT=SYSALLDA, DISP=(NEW,PASS),
```

```

//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSUT6   DD DSN=&&SYSUT6;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=3200,BLKSIZE=12800)
//SYSUT7   DD DSN=&&SYSUT7;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=3200,BLKSIZE=12800)
//SYSUT8   DD DSN=&&SYSUT8;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=3200,BLKSIZE=12800)
//SYSUT9   DD DSN=&&SYSUT9;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=VB,LRECL=137,BLKSIZE=882)
//SYSUT10  DD SYSOUT=*
//SYSUT14  DD DSN=&&SYSUT14;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=3200,BLKSIZE=12800)
//SYSUT15  DD SYSOUT=*
//*
//*****
//* PRELINK STEP: C++ DLL      (USER-WRITTEN LE)                *
//*                C/C++ FOR MVS/ESA COMPILER V3 R1.0          *
//*                AD/CYCLE LE/370 V1 R7.0                     *
//*****
//PLKED EXEC PGM=EDCPRLK,REGION=32M,COND=(0,NE,COMPILE),
//          PARM='MAP,UPCASE,MEMORY,DLLNAME(userd11) '
//STEPLIB  DD DSN=CEEV1R70.SCEERUN,DISP=SHR
//SYMSGSG DD DSN=CEEV1R70.SCEEMSGP(EDCPMSGE),DISP=SHR
//SYSLIB   DD DSN=CEEV1R70.SCEECPP,DISP=SHR
//SYSMOD   DD DSN=IBMUSER.NETDATA.USERLANG.DLLP(PRLKUSER),
//          DISP=SHR
//OBJECT   DD DSN=IBMUSER.NETDATA.USERLANG.OBJ,DISP=SHR
//SYSOUT   DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//SYSDEFSD DD DSN=IBMUSER.NETDATA.USERLANG.DEFSD(USEREXP),
//          DISP=SHR
//SYSIN    DD DSN=IBMUSER.NETDATA.DEFSD(DTWLESHR),DISP=SHR
//          DD DSN=CBCV3R20.SCLB3SID(COMPLEX),DISP=SHR
//          DD DSN=CBCV3R20.SCLB3SID(APPSUPP),DISP=SHR
//          DD DSN=CBCV3R20.SCLB3SID(COLLECT),DISP=SHR
//          DD *
//          INCLUDE OBJECT(USERLANG)
//**
//*****
//* LINK STEP: C++ DLL      (FFI LANGUAGE ENVIRONMENT)          *
//*                C/C++ FOR MVS/ESA COMPILER V3 R2.0          *
//*                AD/CYCLE LE/370 V1 R7.0                     *
//*****
//LKED EXEC PGM=HEWL,REGION=2048K,COND=(4,LT,PLKED),

```

```

//          PARM='MAP,LIST,XREF,RENT,REUS,COMPAT=PM2'
//SYSLIB   DD DSN=CEEV1R70.SCEELKED,DISP=SHR
//SYSLIN   DD DSN=IBMUSER.NETDATA.USERLANG.DLLP(PRLKUSER),
//          DISP=SHR
//          DD *
//          NAME USERDLL(R)
//SYSLMOD  DD DSN=IBMUSER.NETDATA.USERLANG.DLL,DISP=SHR
//SYSUT1   DD DSN=&&SYSUT1;,UNIT=SYSALLDA,DISP=(NEW,PASS),
//          SPACE=(32000,(30,30)),
//          DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//SYSPRINT DD SYSOUT=*
//*
//*****
//* COPY STEP: C++ DLL      (FFI LANGUAGE ENVIRONMENT)          *
//*              C/C++ FOR MVS/ESA COMPILER V3 R2.0             *
//*              AD/CYCLE LE/370 V1 R7.0                       *
//*****
//COPY EXEC PGM=IEWBLINK,REGION=500K,COND=(0,NE,LKED),
//          PARM='LIST,REUS,RENT,NCAL,LET,MAP,CASE=MIXED,COMPAT=PM2'
//SYSPRINT  DD SYSOUT=*
//INLIB     DD DSN=IBMUSER.NETDATA.USERLANG.DLL,DISP=SHR
//*
//SYSLMOD   DD PATH='/usr/lpp/netdata/cgi-bin',
//          PATHOPTS=(OWRONLY,OCREAT,OTRUNC),
//          PATHMODE=(SIRWXO,SIRWXG,SIRWXU)
//*
//SYSLIN    DD *
//          INCLUDE INLIB(USERDLL)
//          ENTRY CEESTART
//          NAME userdll(R)
//*

```

---

## Sample makefile (OS/390-specific)

```

### Target
TARGET          = userlang

### C Compiler
CC              = c89
CFLAGS         = -D_XOPEN_SOURCE_EXTENDED=1 -O -I/u/USER01/netdata/include

### C++ Compiler
CCC            = c++
CCFLAGS       = -D_XOPEN_SOURCE_EXTENDED=1 -O -I/u/USER01/netdata/include

### Linker/Loader
LD             = c++
LDFLAGS       = $(CCFLAGS) -W l,dll

### Sources Headers and Objects
OBS            = userlang.o

```

```

HDRS          = /u/USER01/netdata/include/dtwle.h userlang.h

#####
### Program Libraries #
#####

LIBS = /u/USER01/netdata/defsd/dtwleshr.x

#####
### Additional Targets #
#####

all:          $(TARGET)

$(TARGET):   $(OBS) $(LIBS)
             echo "Linking $(TARGET) ..."
             $(LD) $(LDFLAGS) -o $(TARGET) $(OBS) $(LIBS)
             echo "done"

userlang.o:  $(HDRS) userlang.c
             $(CCC) $(CCFLAGS) -c userlang.c

clean:
             rm -f $(OBS) $(TARGET)

```

---

## Sample OS/400 CL

Assuming the following conditions, use the subsequent steps to build a Language Environment on AS/400:

- SRC is the source file (written in C).
- MYLE contains the exportable procedure, dtw\_execute.
- The file, QSRVSRG, member MYLEEXP, contains the specifications for exporting the procedure dtw\_execute.

1. Create the module:

```
CRTCMOD MODULE(MYLIB/MYLE) SRCFILE(MYLIB/SRC)
```

2. Create the service program:

```
CRTSRVPGM SRVPGM(MYLIB/MYLE) MODULE(MYLIB/MYLE)
          SRCFILE(MYLIB/QSRVSRG) SRCMBR(MYLEEXP)
          BNDSRVPGM(QTCP/QTMHLE)
```

QTCP/QTMHLE is the service program that contains all the Net.Data bindable APIs. On V4R3 and subsequent releases, although QTCP/QTMHLE is available for use, you should use QHTTSPVR/QTMJLE.

---

## Notices

IBM may not offer the products, services, or features discussed in this document in all countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation  
Licensing  
2-31 Roppongi 3-chome, Minato-ku  
Tokyo 106, Japan

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:**  
INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make

improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Canada Limited  
Office of the Lab Director  
1150 Eglinton Ave. East  
North York, Ontario  
M3C 1H7  
CANADA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.



All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information may contain examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information may contain sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. \_enter the year or years\_. All rights reserved.

---

## Trademarks

The following terms, which may be denoted by an asterisk(\*), are trademarks of International Business Machines Corporation in the United States, other countries, or both.

ACF/VTAM	IBM
AISPO	IMS
AIX	IMS/ESA
AIX/6000	LAN DistanceMVS
AIXwindows	MVS/ESA
AnyNet	MVS/XA
APPN	Net.Data
AS/400	OS/2
BookManager	OS/390
CICS	OS/400
C Set++	PowerPC
C/370	QBIC
DATABASE 2	QMF
DataHub	RACF
DataJoiner	RISC System/6000
DataPropagator	RS/6000
DataRefresher	S/370
DB2	SP
DB2 Connect	SQL/DS
DB2 Extenders	SQL/400
DB2 OLAP Server	System/370
DB2 Universal Database	System/390
Distributed Relational Database Architecture	SystemView
DRDA	VisualAge
eNetwork	VM/ESA
Extended Services	VSE/ESA
FFST	VTAM
First Failure Support Technology	WebExplorer
	WIN-OS/2

The following terms are trademarks or registered trademarks of other companies:

Microsoft, Windows, and Windows NT are trademarks or registered trademarks of Microsoft Corporation.

Java or all Java-based trademarks and logos, and Solaris are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Tivoli and NetView are trademarks of Tivoli Systems Inc. in the United States, other countries, or both.

UNIX is a registered trademark in the United States, other countries or both and is licensed exclusively through X/Open Company Limited.

Other company, product, or service names, which may be denoted by a double asterisk(\*\*) may be trademarks or service marks of others.



---

## Glossary

**absolute path.** The full path name of an object. Absolute path names begins at the highest level, or "root" directory (which is identified by the forward slash (/) or back slash (\) character).

**API.** See .

**applet.** A Java program included in an HTML page. Applets work with Java-enabled browsers, such as Netscape Navigator, and are loaded when the HTML page is processed.

**application programming interface.** A functional interface supplied by the operating system or by a separately orderable licensed program that allows an application program written in a high-level language to use specific data or functions of the operating system or licensed program. Net.Data supports the following proprietary Web server APIs for improved performance over CGI processes: GWAPI, ISAPI, and NSAPI.

**BLOB.** Binary large object.

**cache.** A part of memory or disk space that contains recently accessed data, designed to speed up subsequent access to the same data. The cache is often used to hold a local copy of frequently used data that is accessible over a network.

**caching.** The processes of storing frequently-used results from a request to the Web server locally for quick retrieval, until it is time to refresh the information.

**Cache Manager.** The program that manages a cache for one machine. It can manage multiple caches.

**CGI.** Common Gateway Interface.

**cliette.** A long-running process in Net.Data Live Connection that serves requests from the Web server. The Connection Manager schedules cliette processes to serve these requests.

**CLOB.** Character large object.

**commitment control.** The establishment of a boundary within the process that Net.Data is running under where operations on resources are part of a unit of work.

**Common Gateway Interface (CGI).** A standardized way for a Web server to pass control to an application program and receive data back.

**Connection Manager.** An executable file, dtwcm, in Net.Data that is needed to support Live Connection.

**cookie.** A packet of information sent by an HTTP server to a Web browser and then sent back by the browser each time it accesses that server. Cookies can contain any arbitrary information the server chooses and are used to maintain state between otherwise stateless HTTP transactions. *Free Online Dictionary of Computing*

**current working directory.** The default directory of a process from which all relative path names are resolved.

**database.** A collection of tables, or a collection of table spaces and index spaces.

**database management system (DBMS).** A software system that controls the creation, organization, and modification of a database and access to the data stored within it.

**DATALINK.** A DB2 data type that enables logical references from the database to a file stored outside the database.

**data type.** An attribute of columns and literals.

**DBCLOB.** Double-byte character large object.

**DBMS.** Database management system.

**Domino Go Web server.** The Web server offered by Lotus Corp. and IBM, that offers both regular and secure connections. GWAPI is the interface provided with this server.

**firewall.** A computer with software that guards an internal network from unauthorized external access.

**flat file interface.** A set of Net.Data built-in functions that let you read and write data from plain-text files.

**GWAPI.** Go Web server API.

**HTML.** Hypertext markup language.

**HTTP.** Hypertext transfer protocol.

**hypertext markup language.** A tag language used to write Web documents.

**hypertext transfer protocol.** The communication protocol used between a Web server and browser.

**Internet.** An international public TCP/IP computer network.

**Intranet.** A TCP/IP network inside a company firewall.

**ISAPI.** Microsoft's Internet Server API.

**Java.** An operating system-independent object-oriented programming language especially useful for Internet applications.

**language environment.** A module that provides access from a Net.Data macro to an external data source such as DB2 or a programming language such as Perl.

**Live Connection.** A Net.Data component that consists of a Connection Manager and multiple cliettes. Live Connection manages the reuse of database and Java virtual machine connections.

**LOB.** Large object.

**middleware.** Software that mediates between an application program and a network. It manages

the interaction between a client application program and a server through the network.

**NSAPI.** Netscape API.

**null.** A special value that indicates the absence of information.

**path.** A search route used to locate files.

**path name.** Tells the system how to locate an object. The path name is expressed as a sequence of directory names followed by the name of the object. Individual directories and the object name are separated by a forward slash (/) or back slash (\) character.

**Perl.** An interpreted programming language.

**persistence.** The state of keeping an assigned value for an entire transaction, where a transaction spans multiple Net.Data invocations. Only variables can be persistent. In addition, operations on resources affected by commitment control are kept active until an explicit commit or rollback is done, or when the transaction completes.

**port.** A 16-bit number used to communicate between TCP/IP and a higher level protocol or application.

**registry.** A repository where strings can be stored and retrieved.

**relative path name.** A path name that does not begin at the highest level, or "root" directory. The system assumes that the path name begins at the process's current working directory.

**TCP/IP.** Transmission Control Protocol / Internet Protocol.

**transaction.** One Net.Data invocation. If persistent Net.Data is used, then a transaction can span multiple Net.Data invocations.

**Transmission Control Protocol / Internet Protocol.** A set of communication protocols that support peer-to-peer connectivity functions for both local and wide-area networks.

**URL.** Uniform resource locator.

**uniform resource locator.** An address that names a HTTP server and optionally a directory and file name, for example:  
<http://www.ibm.com/software/data/net.data/index.html>.

**unit of work.** A recoverable sequence of operations that are treated as one atomic operation. All operations within the unit of work can be completed (committed) or undone (rolled back) as if the operations are a single operation. Only operations on resources that are affected by commitment control can be committed or rolled back.

**Web server.** A computer running HTTP server software, such as Internet Connection.





---

# Index

## A

abnormal conditions  
  dtw\_lei\_t flag 5, 9  
  error messages 10

## C

cleaning up  
  after processing 3, 5  
  dtw\_lei\_t flag 5, 9  
  flag for abnormal conditions 5, 9  
column headings  
  allocating storage 21, 37  
  assigning names 38  
  deleting 26, 29, 38  
  retrieving 29  
  returning column number 35  
columns  
  deleting 27  
  determining total in table 25  
  inserting 31  
  specifying number of in a table 37  
configuration variables  
  retrieving variable values 19  
  utility functions for managing 16  
configuring environments 12  
creating tables 34

## D

dtw\_interface functions 2  
dtw\_structures 8  
dtw\_utilities 15  
DTW\_LE\_CONTINUE 4  
dtw\_lei\_t  
  fields  
    default\_error\_messages 10  
    exec\_statement 9  
    flags 9  
    function name 9  
    le\_opaque\_data 10  
    parm\_data\_array 10  
    row 10  
  structure 8  
dtw\_parm\_data\_t  
  fields  
    parm\_descriptor 11  
    parm\_name 11  
    parm\_value 11

dtw\_parm\_data\_t (*continued*)  
  structure 11  
dynamic memory allocation 12

## E

ENVIRONMENT statements  
  examples 14, 15  
  for new language environments 12  
  syntax 12  
error condition messages 10  
error conditions 7  
exec statements, dtw\_lei\_t flag 9  
executing language environment statements 3

## F

fatal errors, dtw\_lei\_t flag 5, 9  
FUNCTION block  
  executing statements 3  
  name 9

## G

glossary 65

## H

heap, Net.Data run-time 12

## I

initializing tasks, language environments 2, 3  
interface functions  
  dtw\_cleanup() 5  
  dtw\_execute() 3  
  dtw\_getNextRow() 4  
  dtw\_initialize() 3  
  language environment, description 2  
  processing order 2

## L

language environments  
  clean up after processing 3, 5  
  configuring 12  
  creating i  
  initializing 2  
  interface functions 2  
  interface template 43  
  introduction 15  
  statements, executing 3  
  structures 8

language environments (*continued*)  
  utility functions 15

## M

maximum number of rows 33  
memory management utility functions 15

## P

parameters  
  naming 11  
  parm\_name 11  
  passing 10, 11  
  specifying 11  
parm\_data\_array structures, assigning names 10  
passing  
  parameters 10  
  variables 10  
pointing to storage 20

## R

row-at-a-time processing  
  dtw\_getNextRow() 3, 4  
  DTW\_LE\_CONTINUE 9  
  dtw\_lei\_t flag 9  
row manipulation utility functions 17  
rows  
  appending 24  
  assigning width 21  
  deleting 27, 28  
  dtw\_getNextRow() interface function 10  
  inserting 32  
  retrieving current number of 36  
  returning 3, 4, 10  
  returning maximum allowed 33

## S

storage  
  allocating 20, 21, 23, 37  
  dtw\_lei\_t flag 9  
  freeing 9, 12, 18  
structures, language environment  
  dtw\_lei\_t 8  
  dtw\_parm\_data\_t 11

## T

table values  
  assigning 22, 39

table values (*continued*)

- deleting 26, 30, 39
- retrieving 30

tables

- appending rows 24
- creating new 34
- deleting 26
- manipulation utility functions 16

template, language environment 43

## U

utility functions

- configuration variable 16
- dtw\_free() 18
- dtw\_getvar() 19
- dtw\_malloc() 20
- dtw\_row\_SetCols() 21
- dtw\_row\_SetV() 22
- dtw\_strdup() 23
- dtw\_table\_AppendRow() 24
- dtw\_table\_Cols() 25
- dtw\_table\_Delete() 26
- dtw\_table\_DeleteCol() 27
- dtw\_table\_DeleteRow() 28
- dtw\_table\_GetN() 29
- dtw\_table\_GetV() 30
- dtw\_table\_InsertCol() 31
- dtw\_table\_InsertRow() 32
- dtw\_table\_MaxRows() 33
- dtw\_table\_New() 34
- dtw\_table\_QueryColnoNj() 35
- dtw\_table\_Rows() 36
- dtw\_table\_SetCols() 37
- dtw\_table\_SetN() 38
- dtw\_table\_SetV() 39
- language environment 15
- memory management 15
- row manipulation 17
- table manipulation 16

## V

variables

- freeing 5
- passing 10

---

## Contacting IBM

If you have a technical problem, please review and carry out the actions suggested by the *Troubleshooting Guide* before contacting DB2 Customer Support. This guide suggests information that you can gather to help DB2 Customer Support to serve you better.

For information or to order any of the DB2 Universal Database products contact an IBM representative at a local branch office or contact any authorized IBM software remarketer.

If you live in the U.S.A., then you can call one of the following numbers:

- 1-800-237-5511 for customer support
- 1-888-426-4343 to learn about available service options

---

## Product Information

If you live in the U.S.A., then you can call one of the following numbers:

- 1-800-IBM-CALL (1-800-426-2255) or 1-800-3IBM-OS2 (1-800-342-6672) to order products or get general information.
- 1-800-879-2755 to order publications.

**<http://www.ibm.com/software/data/>**

The DB2 World Wide Web pages provide current DB2 information about news, product descriptions, education schedules, and more.

**<http://www.ibm.com/software/data/db2/library/>**

The DB2 Product and Service Technical Library provides access to frequently asked questions, fixes, books, and up-to-date DB2 technical information.

**Note:** This information may be in English only.

**<http://www.elink.ibm.com/pbl/pbl/>**

The International Publications ordering Web site provides information on how to order books.

**<http://www.ibm.com/education/certify/>**

The Professional Certification Program from the IBM Web site provides certification test information for a variety of IBM products, including DB2.

**ftp.software.ibm.com**

Log on as anonymous. In the directory /ps/products/db2, you can find demos, fixes, information, and tools relating to DB2 and many other products.

**comp.databases.ibm-db2, bit.listserv.db2-l**

These Internet newsgroups are available for users to discuss their experiences with DB2 products.

**On CompuServe: GO IBMDB2**

Enter this command to access the IBM DB2 Family forums. All DB2 products are supported through these forums.

For information on how to contact IBM outside of the United States, refer to Appendix A of the *IBM Software Support Handbook*. To access this document, go to the following Web page: <http://www.ibm.com/support/>, and then select the IBM Software Support Handbook link near the bottom of the page.

**Note:** In some countries, IBM-authorized dealers should contact their dealer support structure instead of the IBM Support Center.





Printed in the United States of America  
on recycled paper containing 10%  
recovered post-consumer fiber.