

This presentation is an overview of the end to end setup and configuration for the IBM z/OS Management Facility V1R11, also called z/OSMF.

Agenda

- Overview
- Packaging
- Installation
- Configuring WebSphere® Application Server OEM Edition 7.0 for z/OS
- Configuring z/OS Management Facility application
- Summary
- Appendix

This is the agenda. This session will cover packaging and setup of z/OSMF 1.11, and the configuration requirements based on the specific delivery package. In particular it will cover the key steps required to configure the components – WebSphere Application Server OEM and z/OSMF application.

IBM z/OS Management Facility V1.11 overview


- The IBM z/OS Management Facility is a new, product for z/OS that provides support for a modern, Web-browser based management console for z/OS.
- Helps system programmers to more easily manage and administer a mainframe system by simplifying day to day operations and administration of a z/OS system.
- More than just a graphical user interface, the z/OS Management Facility is intelligent, addressing the needs of a diversified skilled workforce and maximizing their productivity.
 - ▶ Automated tasks can help reduce the learning curve and improve productivity.
 - ▶ Embedded active user assistance (such as wizards) guides you through tasks and helps provide simplified operations.



IBM z/OS Management Facility (z/OSMF), a new product, will simplify, optimize and modernize the z/OS **system programmer** experience starting with problem data management and TCP/IP Policy based configuration.

z/OSMF will deliver solutions in a task oriented, Web browser based user interface with integrated user assistance. And z/OSMF will make the day to day operations and administration of the mainframe z/OS systems easier to manage for both new and experienced system programmers. The focus is to help improve system programmer productivity, and make the functions easier to understand and use.

You may ask why is it Version 1 Release 11 if it is the first release? Why not V1.1? The goal was to align z/OSMF very closely with z/OS itself. Since for its initial release z/OSMF will be made available at the same time as z/OS V1.11 we wanted to have the same naming convention.

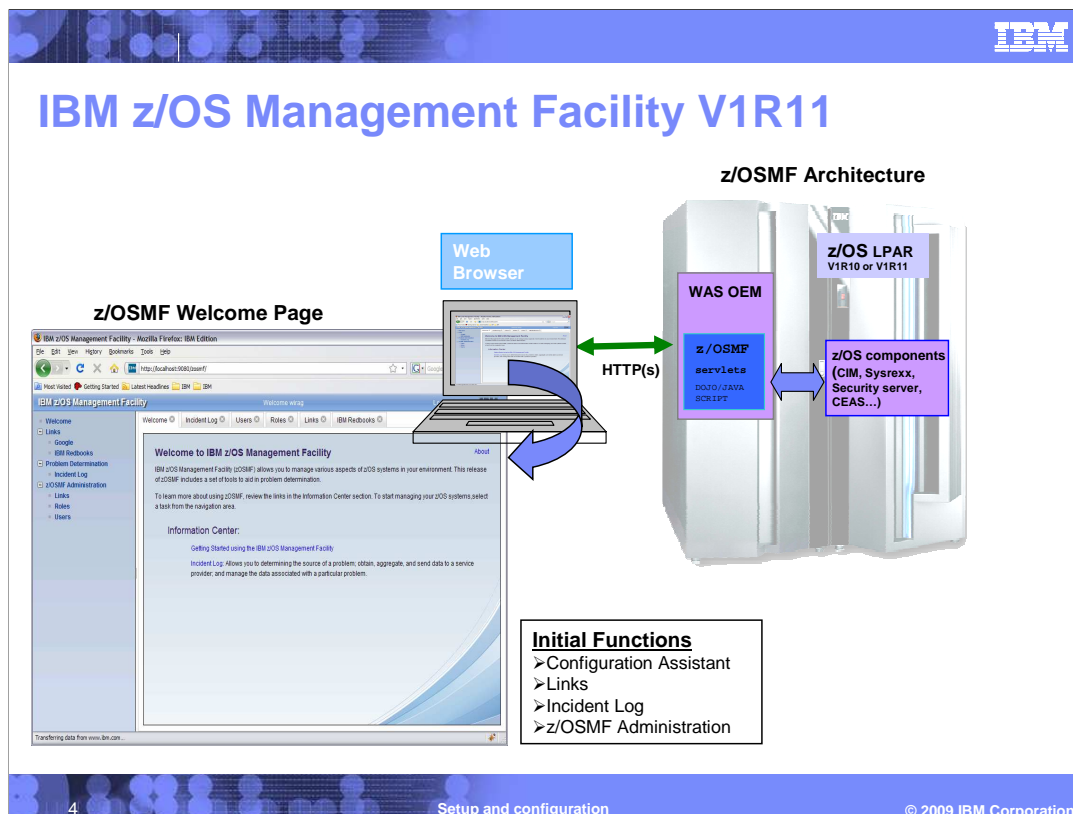

This chart explains the structure for z/OSMF and how it fits into the z/OS environment.

z/OSMF provides a Web browser interface that communicates with the z/OS system with direct access to z/OS data and information using HTTPs. z/OSMF is hosted on the IBM WebSphere Application Server OEM Edition for z/OS that is included with the product. The application server runtime is special version of WebSphere Application Server V7.0 for use by z/OSMF application. The z/OSMF applications exploit functions provided by z/OS system components. Everything is installed on the z/OS server and there are no client side install requirements. End-end configuration and setup of the application stack is simplified by using the scripts provided with the product.

Once WebSphere Application Server has been set up and installed, the z/OS Management Facility application itself is deployed into this runtime and this is where the application serve lets and GUIs reside. Portions of z/OSMF use the DOJO technology for GUIs, which uses Java™ script and that helps improve performance overall because the GUI can perform all the graphics rendering in the browser on the workstation.

System Programmers invoke the application URL with a supported browser and login using their z/OS logon id. The main navigator application authenticates and authorizes the user to a set of tasks which are then loaded into the Web browser.

The z/OSMF welcome page is displayed once the user logs in to zOSMF . That will be covered more in the follow on slides.

For this initial release the tasks and components are the Configuration Assistant for the z/OS Communications server – which performs network configuration; Links – which is a way to list links to external websites and products in an easily accessible location; Incident Log - the problem determination solution, which provides a consolidated view of abend-related problems on the system or sysplex with details behind it. It also provides the ability to send the data collected as a result of a problem to a destination of choice. Various z/OS facilities are employed to provide data and interact with the Web applications.

The initial functions include z/OSMF Administration, Incident Log, Configuration Assistant for z/OS Communication Server and Links

z/OSMF Administration gives the customer a:

- Display welcome page and deployed z/OSMF applications in Task list
- Provides Authorization services for the administrator
- Allows Dynamic addition of links to non-z/OSMF resources

Under the Problem Determination category on the navigation bar, you will find the Incident Log task.

This first release will help all system programmers with problem data management tasks, providing experienced teams with procedural advantages through an incident log summary and detail views of z/OS dump incidents. The Incident Log provides a consolidated list of SVC Dump related problems, along with details and diagnostic data captured with each incident. It also facilitates sending the data for further diagnostics. **Configuration Assistant from Communication Server**

Simplified configuration and setup of TCP/IP policy-based networking functions

Another category on the navigation bar is Links which:

- Provides common launch point for accessing resources beyond the IBM z/OS Management Facility.
- Some links are pre-defined in the product.
- The administrators can define additional links to share commonly used resources for their installation.

z/OSMF packaging

z/OSMF V1R11 consists of:

- **PID# 5655-S28**
- **S/S PID# 5655-S29**
- **FMID# HBBN700 (IBM WebSphere Application Server OEM Edition for z/OS v7.0)**
 - ▶ COMPID 5655I3512 - WEBS APP SVR OEM
- **FMID# HSMA110 - Description: IBM z/OS Management Facility**
 - ▶ COMPID 5655S28SM – z/OSMF Core
 - ▶ COMPID 5655S2805 – z/OSMF Incident Log
 - ▶ COMPID 5655S28CA –Config Assist

These are the details of the z/OSMF 1.11 product package.

Prerequisites

- **z/OS Management Facility requires z/OS V1 R10 and later**
 - ▶ z/OS V1R10 requires additional service, as defined in the program directory
- **The Configuration Assistant for z/OS Communications Server portion of z/OS Management Facility requires z/OS V1.11 or later.**
- **Incident Log function in z/OS Management Facility requires the following z/OS components to be configured**
 - ▶ CIM server
 - ▶ Sysplex Dump Directory
 - ▶ CEA
 - ▶ System Rexx
 - ▶ Logger
- **Client machine (no client machine install requirements)**
 - ▶ Windows XP® operating system and later
 - ▶ Supported browsers:
 - Mozilla Firefox 3.0.6 (recommended)
 - Mozilla Firefox 2
 - Internet Explorer® 7
 - Internet Explorer 6

z/OSMF is supported on z/OS V1.10 and above. On R10 additional service is required. There is no client install requirements

The client/ browser machine is a Windows XP operating system and supported browsers: Mozilla Firefox 3.0.6 (recommended), Mozilla Firefox 2, Internet Explorer 7, Internet Explorer 6. Two of each browser technology.

Note Additional service required on z/OSV1R10 system will be stated in the program directory.

Installation

Installation scenarios:

- z/OS V1R11 ServerPac
 - ▶ Provides **default** customization by way of post install customization
 - ▶ Use the WebSphere Application Server OEM Configuration Guide and z/OSMF User's guide and Configuration scripts to setup if defaults are not viable
 - ▶ Provided for both Full System Replace and Software Upgrade installation paths
- z/OSMF V1R11 CBPDO
 - ▶ Can be installed on z/OS V1R10 or z/OS V1R11
 - ▶ Use Program directory to get started
 - ▶ Use the WebSphere Application Server OEM Configuration Guide and z/OSMF User's guide and Configuration scripts to setup
- Setting additional instances (test, service, backup)
 - ▶ Follow the User's guide for instructions

Here are the installation scenarios.

z/OSMF can be ordered in a ServerPac which provides a **default** customization, so that when the system is brought up you have an instance of z/OSMF up and running and all you have to do is point your browser to it. If system supplied defaults are not viable, the best approach is to use the scripts

z/OSMF can also be ordered in a CBPDO which means z/OS V1.10 customers can order z/OSMF by itself and get the WebSphere Application Server OEM edition and the z/OSMF application. z/OS V1.11 customers who did not order z/OSMF with R11 ServerPac ... can do so at a later date with CBPDO.

Installation

V1R11 ServerPac

- The z/OS V1R11 ServerPac with z/OSMF V1R11 will have both the FMIDs that make up z/OSMF installed in the appropriate directories
- ServerPac provides post-install jobs to create a **default** instance of z/OSMF that has been setup end-end with all applications deployed. This includes:
 - ▶ Allocate and mount z/OSMF product and data file systems
 - ▶ Install and set up WebSphere Application Server OEM for z/OSMF and deploy z/OSMF applications
 - ▶ Create ZOSMFAD administrator identity
 - ▶ Set up z/OS for Incident Log (CIM Server, Sysplex Dump Directory, Logger, Log streams, System Rexx, Parmlib setup etc).
 - ▶ Prime z/OSMF data repository with ZOSMFAD user ID
- Note: When defaults cannot be taken, the User guides should be followed to setup the product

This focuses on z/OS V1.11 ServerPac.

z/OS V1.11 ServerPac will include it if you order z/OSMF as its an optional product. When you order z/OSMF in the z/OS V1.11 ServerPac, not only is z/OSMF installed in the Pac but there are also post-install steps and jobs that take the user through end to end set up for WebSphere Application Server OEM and z/OSMF to create a default instance. This includes the defaults that come with z/OSMF, but also defining user requirements. So when z/OS V1.11 is brought up, so is z/OSMF V1.11.

It performs all of the requirements, including allocating and mounting file systems , creating the administrator identity, setting up all the z/OS requirements, .. in the stack chart that was shown, it is not just WebSphere Application Server OEM, and z/OSMF application, but it communicates with many components in z/OS. So it ensures that all the components are required are all correctly set up – not only in terms of component set up with parmlibs or directories, but also from a security perspective for permissions and user definitions. The administrator user ID is defined at startup, so you are truly ready to go and use this product.

Installation

z/OSMF V1R11 CBPDO (on z/OS V1R10 or z/OS V1R11)

The program directory provides sample jobs to lay down both the FMIDs that make up z/OSMF in the appropriate directories

- If you are installing on z/OS **V1R10**, apply prerequisite service
- Setup z/OS as described in the Planning section of z/OSMF User's Guide and the WebSphere Application Server OEM 7.0 Configuration Guide
- Collect all the input as described in the WebSphere Application Server OEM Configuration Guide
- Collect all the inputs for application setup as described in the z/OSMF User's Guide
- Scripts are provided to configure and setup WebSphere Application Server OEM 7.0 and z/OSMF V1R11, and some of the required z/OS setup

In case of a PDO you have to use the documentation that is provided. It has a planning section that tells you all the different things you need to set up with very good guidance with samples and scripts. The planning section also puts together everything you will need to complete the set up end to end so you can collect the information that is needed..... because very often it is not just one person with all the information, you need the networking person to give you some information, the security person needs to give you more information, the system programmer needs to provide information on the data sets and volumes, . There are scripts that take you through the setup, with information you have collected as part of the planning exercise.

Installation

■ Setting up additional instance for z/OSMF

- ▶ Install and setup WebSphere Application Server OEM.
Note that each WebSphere Application Server setup needs unique values (server, cell, and so on)
- ▶ Collect all the inputs as described in Planning section of z/OS User's Guide (At completion of ServerPac there is a config file, izudflt-serverpac.cfg, with most inputs that can be read in also)
- ▶ Invoke setup scripts to configure and setup z/OSMF

Note: z/OSMF is designed to be installed using the scripts provided.

There is additional information provided on how you would set up additional instances of z/OSMF for backup. z/OSMF does not have hot backup or hot failover at this point . You will have to ensure there is another z/OSMF instance set up that is configured appropriately but not started at the same time ... but can be started later as part of the same repository, so you don't have to go through and define it all over again.

You might also want to set up another instance for a test system.

Scripts are provided to perform the set up, and the setup is broken into 3-4 pieces for flexibility. You can set up the z/OSMF main application, there is separate script to set up the incident log, the security for each task is also broken into a separate script so you can review first – because the system programmer setting up z/OSMF is sometimes not the one to set up for security.

You can optionally read in values saved by ServerPac setup or start from beginning. When using ServerPac configuration file, make sure to update new WebSphere Application Server OEM values and member specific paths.

In order to switch z/OSMF instances and use the same customization, the sysplex must use shared SAF or identical SAF setup. For shared SAF, ServerPac has already setup needed SAF.

Installation

For all scenarios:

- **Verify that z/OSMF has been properly setup and configured**
 - ▶ Script is provided to verify that all the z/OS setup was completed successfully
- **Verify the Client environment**
 - ▶ A client environment checking tool has been provided to check the browser settings. The URL to access is documented in the IBM z/OS Management Facility User's Guide
- **Start z/OSMF**
 - ▶ Starting WebSphere Application Server OEM will also start z/OSMF

Note: At the completion of above setup, the administrator - ZOSFMAD user can access all tasks on the UI.

- **To add additional users,**
 - ▶ The administrator, ZOSMFAD, needs to add and assign those users the appropriate roles on the UI under Administration category.
 - ▶ Use the sample scripts to generate and submit the RACF® commands needed to connect user to Core (includes Configuration Assistant) and/or Incident Log.
 - Note: You will need the z/OSMF config file as input

Beyond that we provide scripts that the set up is correct and complete for the flow that they want to work with so we have verification for basic z/OSMF setup and for incident log which has the biggest amount of setup requirements. so that it is set up correctly all the way down to where the dumps are taken, where its visible as an incident, all the way up to the delete.

So that is the server side setup and verification for z/OSMF. what about the browser client?

So we provide client check as well that you can invoke through a URL and it will actually check the browser environment . Not only giving a detailed report of the browser setting, but also point out any setting that is not correct for z/OSMF to run and how to fix that .

Once all the verifications have been done , you can start WebSphere Application Server OEM and start z/OSMF.

Once the administrator is set up by default, we provide additional scripts to add additional users. They encompass everything that is required define additional users , end to end, authorization they may require so that you can easily enable more users.

To Start WebSphere Application Server OEM in UNIX®

issue - \$IZU_APPSERVER_ROOT/AppServer/bin/startServer.sh \$APPSERVER_NAME

Where by default:

APPSERVER_ROOT = /u/wasoeqcf

APPSERVER_NAME= server1 and can be found in:

\$IZU_APPSERVER_ROOT/AppServer/profiles/default/config/cells/*/nodes/*/servers

To Start WebSphere Application Server OEM on MVS Console

START appserver_proc_name,JOBNAME=server_short_name,

ENV=cell_short_name.node_short_name.server_short_name

For example:

START BBN7ACR,JOBNAME=BBNS001,ENV=BBNBASE.BBNNODE.BBNS001

z/OSMF Configuration and setup detailed flow

- Configuring WebSphere Application Server OEM
- Configuring z/OSMF
- Creating new users for z/OSMF
- Setting up Sysplex Dump Directory

The following steps represent the flow of the configuration and setup process.

WebSphere Application Server OEM V7 Configuration – Overview

- Pre-requisites for WebSphere Application Server OEM
 - ▶ Some z/OS components and parmlibs need to be setup before configuring WebSphere Application Server OEM
- WebSphere Application Server OEM configuration is achieved in three phases
 - ▶ Step A – Config - Invoke WASOEM.sh in config mode:
 - Specific configuration and customization settings are collected as you respond to a series of interactive prompts.
 - A new version of the response file is generated that reflects your responses to the prompts.
 - Unless you specify the -nooverride parameter, the new response file is then updated with any information that you provided in the override response file.
 - Three security jobs are created for you to run to set up the security env
 - ▶ Step B – Security Customization - Submit Security Customization Jobs
 - BBOSBRAK
 - BBOSBRAM
 - BBOCBRAK
 - ▶ Step C – Create Instance - Invoke WASOEM.sh in create mode:
 - The helper script createWASOEMHFS.sh is invoked to create an instance of IBM WebSphere Application Server OEM Edition for z/OS
 - The wsadmin script updateConfigWASOEM.py is invoked to modify the configuration settings for this IBM WebSphere Application Server OEM Edition for z/OS instance.

In order to setup and configure WebSphere Application Server OEM, the pre-requisite setup on z/OS needs to be completed first. This is described in the Configuration Guide.

The WebSphere Application Server OEM configuration itself has three main steps and stated above and described further in following charts.

All instructions assume the use of RACF security product, but can be substituted with non-RACF commands as needed.

Install step A: Running WASOEM.sh in config mode

- Refer to Web site
 - ▶ **Link needed to config guide**
- Syntax :
 - WASOEM.sh -config
 - ▶ Where :
 - ▶ Required parameters
 - config = indication that this is the configuration phase of install
 - ▶ Optional parameters
 - showmsgprefix = indicates that message prefixes should display on the console.
 - noclear = indicates that the screen should not be cleared between prompts.
 - fastpath = indicates that you want to use the variable values that are already specified in the response file, and/or in the override response file. When you specify this parameter, you are not prompted for new values for the response file variables during the configuration process.
 - nooverride = indicates that you do not want to use the variable values that are specified in the override response file.
 - v = additional detail included in the log file and displayed on the console.
 - responsefile = specifies the fully-qualified name of the response file that you want WASOEM.sh to use as its input file.

The first step in configuring WebSphere Application Server OEM is to collect the required by invoking the script with the requested parameters. This will create a new or updated response file and the required security jobs.

Install step A (continued)

- ▶ If you do not specify a file name to save the configuration into, it will be
 - ▶ saved in /etc/zWebSphereOEM/V7R0/conf/
 - ▶ Make sure when customers run this, they also have access to:
 - load module plexname
 - createWASOEMHFS.sh
 - modifyWASOEM.py
 - ▶ These are located in the same dir as WASOEM.sh (/usr/lpp/zWebSphereOEM/V7R0/bin). The PATH should also be setup so these scripts can be referenced.
 - ▶ This, and all other shell scripts must run in either an OMVS, telnet or rlogin session. It cannot be run from under ISHELL.
 - ▶ This shell script invokes WebSphere Application Server install technology in the form of the zpmt.sh install tool. This script accepts the responseFile after it has been tailored and produces three security jobs that are submitted in the next step

Here are additional notes and considerations when using the script to create the new response file

Install step B: Running the security customization jobs

- Refer to Website **Link needed to config guide**
 - ▶ **Link needed to config guide**
- The newly created customization jobs are located in the `$zTargetHLQ.CNTL` library.
 - ▶ Ex: if the default.Responsefile contained a setting of `$zTargetHLQ=BBN.V7R0.CONFIG1.ZPMTJOBS` Then the security customization jobs would be found in the library `BBN.V7R0.CONFIG1.ZPMTJOBS.CNTL`
- The security customization jobs must be submitted in the following order:
 - ▶ **BBOSBRAK**
 - creates the Administrator ID `{zAdminUserId}` without a password, or password phrase. This is the ID used to log onto the WebSphere Application Server administrative console
 - ▶ **BBOSBRAM**
 - creates the various home directories for IBM WebSphere Application Server OEM Edition for z/OS.
 - ▶ **BBOCBRAK**
 - creates the following RACF users and profiles that are required by the IBM WebSphere Application Server OEM Edition for z/OS node.

The security jobs that have been created need to reviewed and run by the security administrator. If a security product other than RACF is used, the equivalent commands can be substituted here instead.

Install step C: Running WASOEM.sh in create mode

- Refer to Web site **link needed to config guide**
 - ▶ **Link needed to config guide**
- Syntax :
 - ▶ WASOEM.sh -create <*configuration_name*>
 - ▶ Where :
 - Required parameters
 - -create = indication that this is the instance creation phase of install
 - Optional parameters
 - -showmsgprefix = indicates that message prefixes should display on the console.
 - -noclear = indicates that the screen should not be cleared between prompts.
 - -v = additional detail included in the log file and displayed on the console
 - -nocustom = indicates that you do not want to run the customization portion of the WASOEM script.

Finally, the instance of WebSphere Application Server OEM is created by invoking the script with the –create parameter.

z/OSMF configuration overview

Action to perform	Script invocation	Performed by
"Step 1: Create the initial configuration"	<code>izusetup.sh -config <i>filename</i> [-system <i>sysname</i>]</code>	Superuser
"Step 2: Configure security for the core functions"	<code>izusetup.sh -racfcore <i>configfilename</i></code>	Superuser
"Step 3: Configure security for the Incident Log"	<code>izusetup.sh -racfincidentlog <i>configfilename</i></code>	Superuser
"Step 4: Verify the RACF security setup"	<code>izusetup.sh -file <i>configfilename</i> -verify racf</code>	Superuser
"Step 5: Prime the z/OSMF data file system"	<code>izusetup.sh -file <i>configfilename</i> -prime</code>	Superuser
"Step 6: Complete the setup for core functions"	<code>izusetup.sh -file <i>configfilename</i> -core</code>	z/OSMF administrator
"Step 7: Complete the setup for the Incident Log"	<code>izusetup.sh -file <i>configfilename</i> -application log</code>	z/OSMF administrator
"Step 8: Verify the previous actions"	<code>izusetup.sh -file <i>configfilename</i> -verify [all core log]</code>	z/OSMF administrator
"Step 9: Verify the z/OSMF configuration"	At the end of the z/OSMF configuration process, you can verify the success of your configuration changes by opening your browser to the z/OSMF Welcome task.	z/OSMF administrator

The table describes the steps to configuring z/OSMF. The first column describes the 9 steps to configuring z/OSMF. The second column contains the commands used to invoke the script to perform the action. The third column identifies the user required to perform the action.

z/OSMF configuration log files

- Format: script_\$(date +"%m%d%y")_\$(date +"%H%M%S").log
- Configuration logs are written to \$IZU_CONFIG_DIR (by default: /etc/zosmf)
- For most scripts, if \$IZU_CONFIG_DIR is not available logs are written to /tmp.

Message file

- \$IZU_CODE_ROOT/bin/IZUGDeploy.properties
- z/OSMF configuration messages are IZUG100 to IZUG399

Log files for z/OSMF configuration are given the following naming convention. The “script” prefix identifies the name of the script that has been invoked. It is followed by a timestamp and ending with a “log” extension.

For example, the logs for scripts izuadmin.sh and izuprime.sh are izuadmin_040309_153552.log and izuprime_052209_134047.log respectively:


The logs are written to \$IZU_CONFIG_DIR (/etc/zosmf). If this directory does not exist the logs are written to \$TMPDIR. If \$TMPDIR is not set then it is written to /tmp.

File IZUGDeploy.properties contain the z/OSMF configuration message definitions. This file is located in \$IZU_CODE_ROOT/bin.

The z/OSMF configuration messages are ranged from IZUG100I to IZUG379I.

Step 1: Create the initial z/OSMF configuration

`izusetup.sh -config filename [-system sysname]`

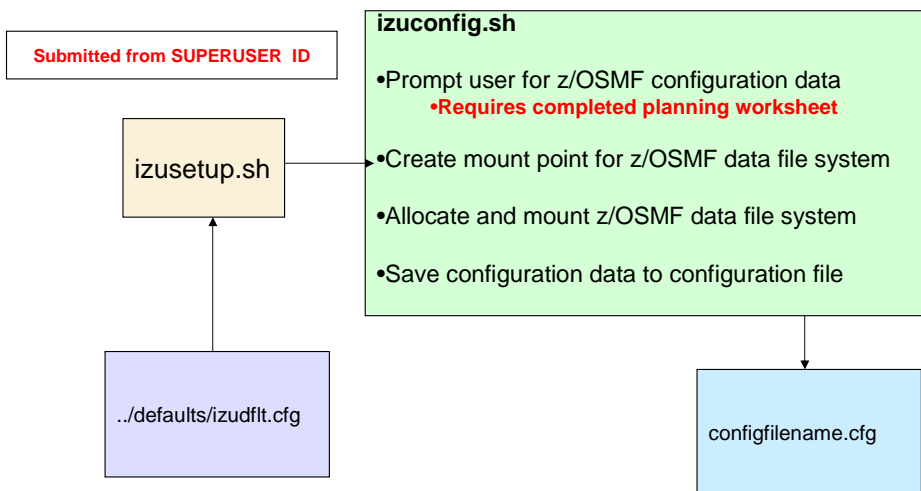

This is the first step in the configuration for z/OSMF. It creates the configuration file needed for the remainder of the steps in the configuration. The installer is prompt for values that will be saved to a caller specified configuration file. The planning worksheet **MUST** be completed before this step. This step also allocates and mounts the z/OSMF data file system (if it doesn't already exist). It creates the logs directory on the data file system that is used to store the run time logs for z/OSMF.

Some highlights for this step:

- Requires superuser authority with a UID of 0 to run this script.
- Provides option to setup Incident Log
- Provides option to setup CIM
- Default saved configuration file format is `izudflt-$(date +"%m%d%y")_$(date +"%H%M%S").cfg` and is saved in `$IZU_CONFIG_DIR (/etc/zosmf)`
- User specified configuration file can also be provided to prime the prompts with default values
- In creating the z/OSMF data file system both zFS and HFS file systems are supported

``` ./defaults/izudflt.cfg ```

```

IZU_ADMIN_NAME ZOSMFAD
IZU_ADMIN_PROC OMVS0802
IZU_ADMIN_ACCOUNT MVS420
IZU_ADMIN_REGION 2096128
IZU_ADMIN_UID 9001
IZU_ADMIN_GROUP SYS1
IZU_ADMIN_HOME /u
IZU_ADMIN_PROGRAM /bin/sh
IZU_WAS_PROFILE_PREFIX BBNBASE
IZU_CLUSTER_TRANSITION_NAME BBNC001
IZU_APPSERVER_GROUP WSCFG1
IZU_APPSERVER_ROOT /zWebSphereOEM/V7R0/config1
IZU_CELL_SHORT_NAME BBNBASE
IZU_CONTROL_USERID WSCRU1
IZU_SERVANT_USERID WSSRU1
IZU_WBEM_ROOT /usr/lpp/wbem
IZU_DATA_FS_NAME IZU.SIZUDATA
IZU_CODE_ROOT /usr/lpp/zosmf/V1R11
IZU_DATA_DIR /var/zosmf
IZU_CONFIG_DIR /etc/zosmf
IZU_CIM_GROUP_NAME CIMGP
IZU_CIM_GROUP_ID 5321
IZU_CEA_UID 9002
IZU_CEA_GROUP_NAME CEAGP
IZU_CEA_GROUP_ID 6321
IZU_CEA_PARM_NAME ZM
IZU_JEA_PARM_NAME ZM
IZU_PARMLIB SYS1.PARMLIB
IZU_PARMLIB_SOURCE SYS1.PARMLIB
IZU_INCIDENT_LOG Y
IZU_CIM_SETUP N

```

``` configfilename.cfg ```

```

IZU_ADMIN_NAME ZOSMFAD
IZU_ADMIN_PROC OMVS0802
IZU_ADMIN_ACCOUNT MVS420
IZU_ADMIN_REGION 2096128
IZU_ADMIN_UID 9001
IZU_ADMIN_GROUP SYS1
IZU_ADMIN_HOME /u/zosmfad
IZU_ADMIN_PROGRAM /bin/sh
IZU_WAS_PROFILE_PREFIX BBNBASE
IZU_CLUSTER_TRANSITION_NAME BBNC001
IZU_APPSERVER_GROUP WSCFG1
IZU_APPSERVER_ROOT /u/wasoemcfg
IZU_CELL_SHORT_NAME BBNBASE
IZU_CONTROL_USERID WSCRU1
IZU_SERVANT_USERID WSSRU1
IZU_WBEM_ROOT /usr/wbem
IZU_DATA_FS_NAME IZU.SIZUDATA
IZU_CODE_ROOT /usr/lpp/zosmf/V1R11
IZU_DATA_DIR /SY1/var/zosmf
IZU_CONFIG_DIR /etc/zosmf
IZU_CIM_GROUP_NAME CIMGP
IZU_CIM_GROUP_ID 5321
IZU_CEA_UID 9002
IZU_CEA_GROUP_NAME CEAGP
IZU_CEA_GROUP_ID 6321
IZU_CEA_PARM_NAME ZM
IZU_JEA_PARM_NAME ZM
IZU_PARMLIB HDENNIS.ZOS17.PARMLIB
IZU_PARMLIB_SOURCE CE Aid.PUIAM.JCL2
IZU_INCIDENT_LOG Y
IZU_CIM_SETUP N
IZU_SYSNAME_PREFIX SY1
IZU_DATA_FS_TYPE ZFS
IZU_COUNTRY_CODE 000
IZU_BRANCH_CODE 999
IZU_STORAGE_VALUE "VOLSER(PEVDM3)"


```

This is a sample. The left represents the current default configuration file. It contains the properties and default values provided for the configuration.

The right shows an example of a file that is created after completing Step 1.

Step 2: Configure security for the core functions izusetup.sh –racfcore configfilename.cfg

Submitted from SUPERUSER ID

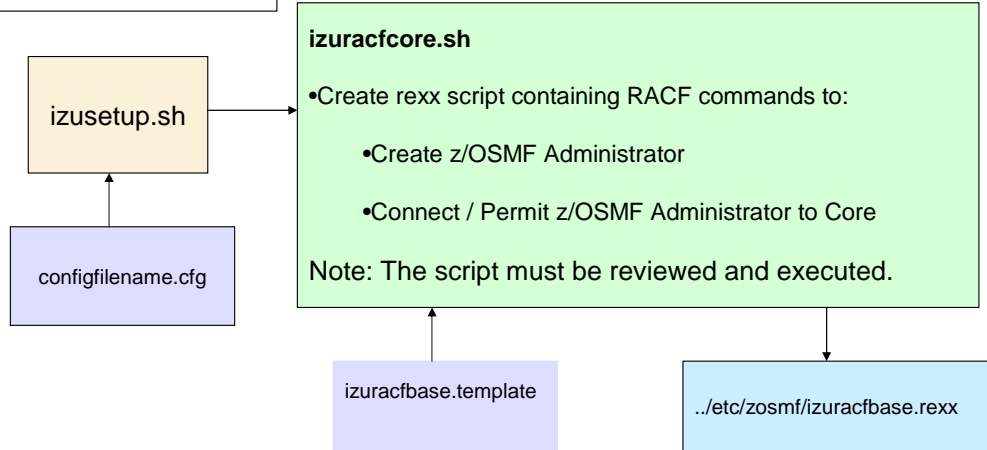

This step creates a rexx script which contains the RACF commands to configure security for the core functions. The script should be reviewed, modified as needed and executed by the security administrator. If another security product is used instead, the commands can be substituted appropriately.


izuracfbcore.sh is invoked with the configuration file. The values in the configuration file are applied to template file, izuracfbcore.template, to create a rexx script which contains the RACF commands for the core functions.

The rexx script contains RACF commands used to create the z/OSMF administrator and to connect/permit it to core functions.

Step 3: Configure security for the Incident Log

`izusetup.sh -racfincidentlog configfilename.cfg`

Submitted from SUPERUSER ID

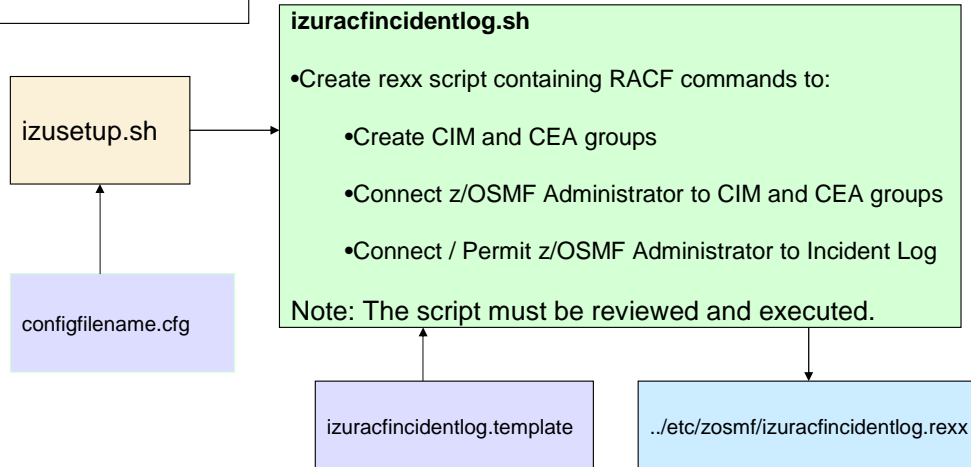

This step creates a rexx script which contains the RACF commands to configure security for the Incident Log. The script should be reviewed, modified as needed and executed by the security administrator. If another security product is used instead, the commands can be substituted appropriately.

`izuracfincidentlog.sh` is invoked with the configuration file. The values in the configuration file are applied to template file, `izuracfincidentlog.template`, to create a rexx script which contains the RACF commands for the Incident Log functions.


The rexx script also contains RACF commands used to create CIM and CEA groups. The z/OSMF administrator is connected/permitted to CIM and CEA groups required for Incident Log.

For cases where CIM is already configured, no CIM group is created. Instead the z/OSMF administrator is permitted to the existing CIM RACF classes. More information on this subject is provided later on.

Step 4: Verify the RACF security setup

`izusetup.sh -file configfilename.cfg -verify racf`

Submitted from IBMUSER (SUPERUSER)

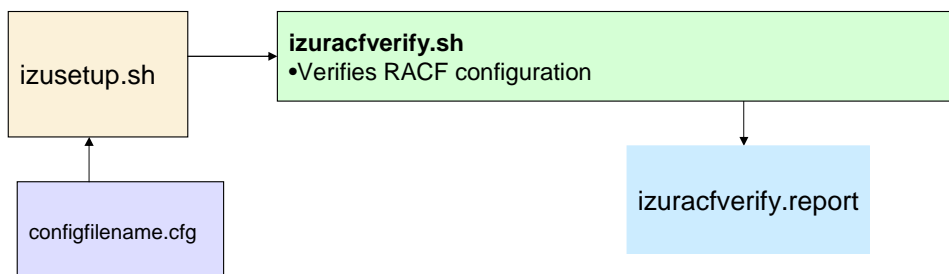


This step verifies the RACF settings for z/OSMF. A report file (`izuracfverify.report`) is created. It contains the sequence of RACF commands that were issued to validate the setup. If an error occurs the error can be found within this file.

Step 5: Prime the z/OSMF data file system

`izusetup.sh -file configfilename.cfg -prime`

Submitted from SUPERUSER ID

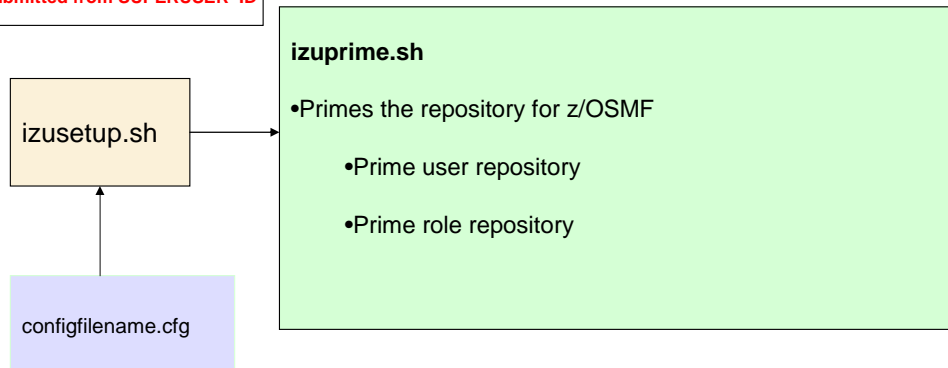


This step primes the z/OSMF data file system with the user and role repository. This sets up the persistent data for z/OSMF.

Step 6: Complete the setup for core functions

`izusetup.sh -file configfilename.cfg -core`

Submitted from z/OSMF Administrator ID

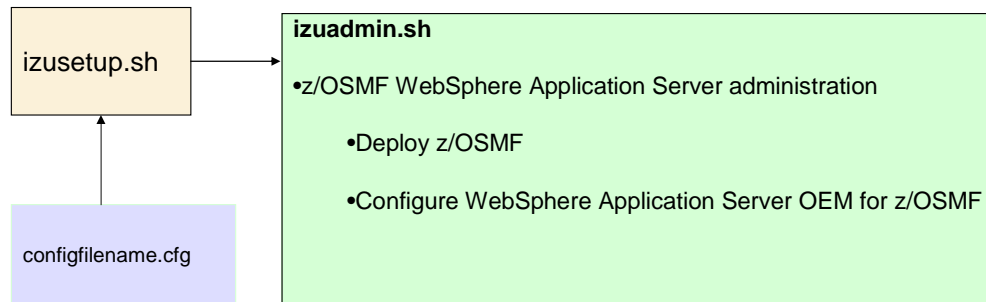


Performs the required WebSphere Application Server administration for z/OSMF and Deploys the application .EAR to the application server.

Step 7: Complete the setup for the Incident Log

`izusetup.sh -file configfilename.cfg -application log`

Submitted from z/OSMF Administrator ID

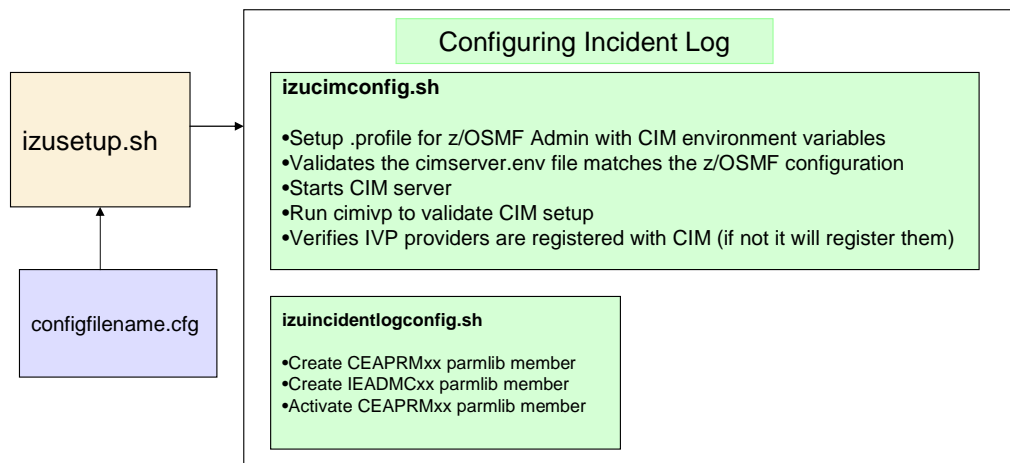

Configuring CIM

The script verifies the values in `/etc/wbem/cimserver.env` file matches the configuration, Updates z/OSMF administrator's .profile with CIM environment variables, Starts the CIM server, Validates the CIM server setup and verifies that the IVP CIM Providers are registered with CIM (if not registered, it will register them).

Configuring Incident Log

The script copies SYS1.SAMPLIB(IEADMCZM) into specified PARMLIB dataset, where the suffix used for IEADMC is based on value in configuration file.


The script also copies CEAPRM from source dataset into specified PARMLIB dataset. The CEAPRM member is updated with data from configuration file:Branch, Country Code, Storage. The suffix used for CEAPMRxx is based on value in configuration file.

Finally the script calls `IBMzOS_PDW_IVP` (method `SetCEAMember`) to activate the CEA member on the system.

Step 8: Verify the setup

`izusetup.sh -file configfilename.cfg -verify all`

Submitted from z/OSMF Administrator ID

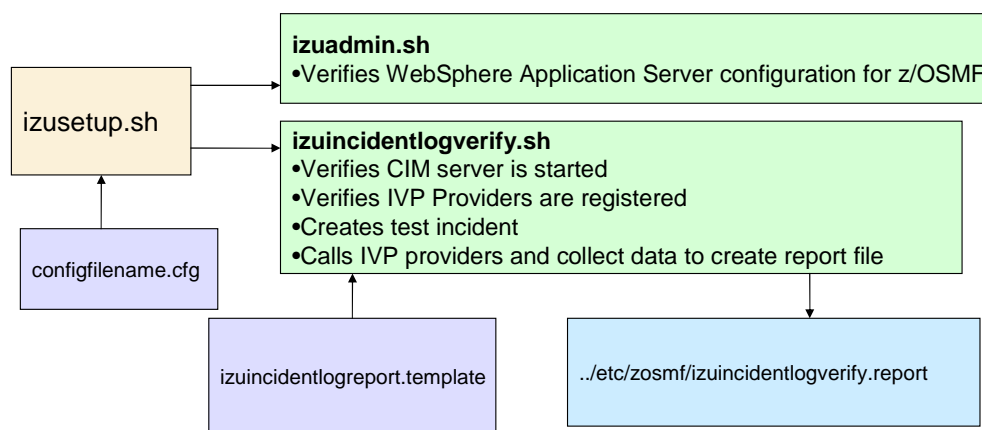

Verifies the configuration for both core and Incident Log functions.

The core verification validates the WebSphere Application Server configuration for z/OSMF.

The Incident Log verification validates Incident Log configuration for z/OSMF. This includes verifying all the z/OS dependencies (CEA, Sysrexx, Logger, etc.), Creating a test dump on the target system and running a series of Incident Log operations against it to verify function and lastly, Creating a test report which details the results of the verification

The core verification can be invoked independently with the following command:
`izusetup.sh -file configfilename.cfg -verify core`

The Incident Log verification can be invoked independently with the following command:
`izusetup.sh -file configfilename.cfg -verify log`

izuincidentlogverify.report

Incident Log Verification Report	

Sysplex Dump Directory : SUCCESS	
CEA : SUCCESS	
System Rexx : SUCCESS	
Diagnostic Information	

SVCDump : SUCCESS	
Operations Log : SUCCESS	
Error Log : SUCCESS	
Error Log Summary : SUCCESS	
Incident Log Operations	

Prepare Dump Request : SUCCESS	
Prepare Operations Log Request : SUCCESS	
Prepare Error Log Request : SUCCESS	
Prepare Error Log Summary Request : SUCCESS	
Set PMR Request : SUCCESS	
Set Tracking Request : SUCCESS	
CEA Parmlib Member	

Snapshot : TRUE	
Branch : 999	
Country : 000	
Storage Value : PEVDM3	
HLQ : CEA	
continue →	
SLIP OperLog time : 3600	
SLIP LOGREC time : 3600	
SLIP LOGRECSUMMARY time : 86400	
DUMP OperLog time : 3600	
DUMP LOGREC time : 3600	
DUMP LOGRECSUMMARY time : 86400	
ABEND OperLog time : 3600	
ABEND LOGREC time : 3600	
ABEND LOGRECSUMMARY time : 86400	
Incident Log Logstreams	

System Logger : TRUE	
OperLog set to Logstream : TRUE	
Logrec set to Logstream : TRUE	
Primary Logger CDS : "CIMPROV.LOGR001"	
Alternate Logger CDS : "CIMPROV.LOGR002"	
Number of LSR for Primary CDS : 60	
CEA OperLog Logstream : ""	
CEA Logrec Logstream : ""	
Sysplex Dump Directory	

Name : "MVSSPT.SYSPLEX.DMPDIR"	
Size : 112	
On shared volume : TRUE	
Full : FALSE	
IPCS initialized : TRUE	

This is an example of the Incident Log verification report.


Step 9: Verify the z/OSMF configuration

- Start WebSphere Application Server OEM:

- ▶ START BBN7ACR,JOBNAME=BBNS001,ENV=BBNBASE,BBNNODE,BBNS001

- Point your browser to:

- <https://hostname:port/zosmf/>

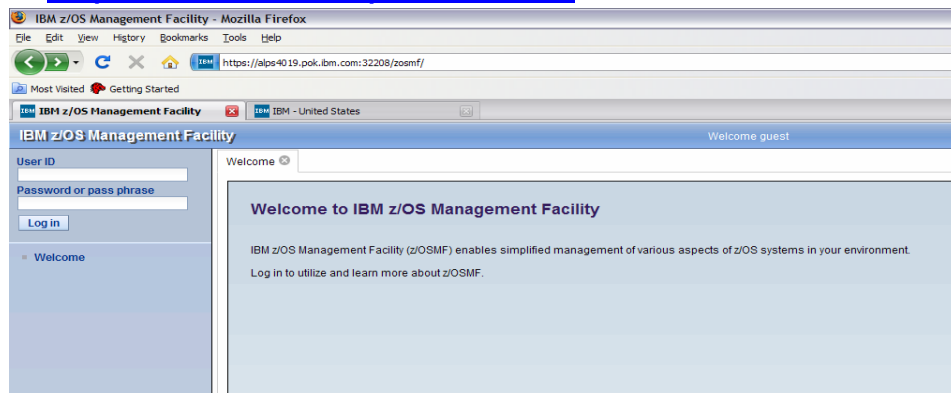

This is the final step to the z/OSMF configuration. Once WebSphere Application Server is started, point the browser to the URL of the target system and log on as the z/OSMF administrator.

z/OSMF Configuration with pre-existing CIM setup

- If CIM server is already setup and operational, then it is assumed that
 - ▶ CIM administrator has been created
 - ▶ CIM RACF setup has been completed
- In order for z/OSMF to also use the CIM server, the scripts will perform the required steps as follows
 - ▶ In step 1, create configuration, only needs to know the name of the existing CIM administrator, and will bypass all other prompts relating to CIM.
 - ▶ In Step 3, configuring security for the Incident Log, no CIM RACF setup will take place. It is assumed that this has already been completed.
 - ▶ Instead, the z/OSMF administrator will be permitted to the CIM/Incident Log RACF classes.
 - ▶ In Step 7, completing the setup for Incident Log, the scripts to handle the CIM configuration will not be called. The CIM server is expected to be running for this case. The configuration will verify that the CIM server is running and will only perform the PARMLIB updates

If the CIM environment has already been setup on the target system, the setup scripts will take that into account. No special action has to be taken, other than provide the name of the currently setup CIM administrator.


Adding users to z/OSMF

- Adds an existing user to z/OSMF
- The z/OSMF administrator needs to add the user to z/OSMF by way of the Users task
- Two scripts are provided:
 - ▶ izuaddloguser.sh: adds user to both Core and Incident Log
 - ▶ izuaddcoreuser.sh: adds user to Core only
- The configuration file name is required as input.
 - ▶ If scripts are invoked without configuration file the caller will be prompted for required values.

After completing the configuration for z/OSMF two scripts are provided to allow existing users to be added to z/OSMF.

The scripts can be invoked with the configuration file used for the z/OSMF configuration or (if omitted) prompts will be displayed for the properties required to add the users.

izuaddloguser.sh -file configfilename.cfg -username zmausr1

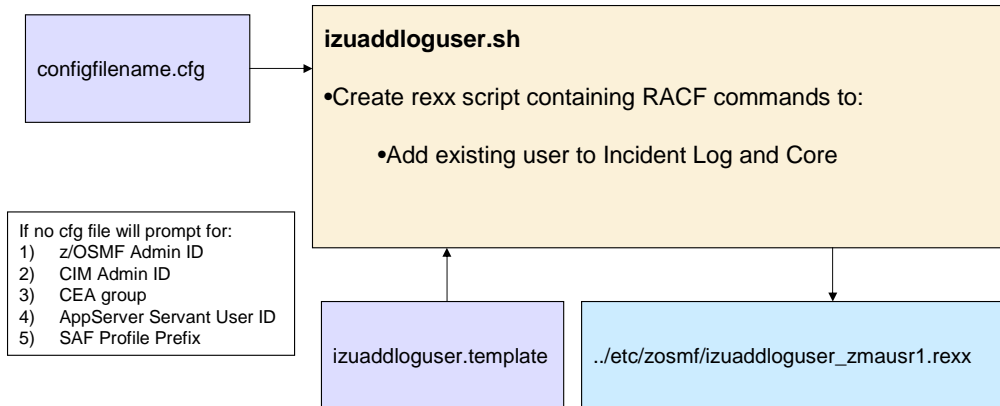


Adding a user to the Incident Log functions can be done using the `izuaddloguser.sh` script. Using a template file, values are applied to the template file to create a RACF rexx script containing the RACF commands to add the specified user to the Incident Log and core functions. In this example, the output rexx script will be named `izuaddloguser_zmausr1.rexx`.

This script can be passed in the configuration file used for the z/OSMF configuration. Or, if the file is omitted, the caller will be prompted for the values required.

The required values are: z/OSMF Admin ID, CIM Admin ID, CEA group, AppServer Servant User ID and SAF Profile Prefix

izuaddcoreuser.sh -file configfilename.cfg -username zmausr1

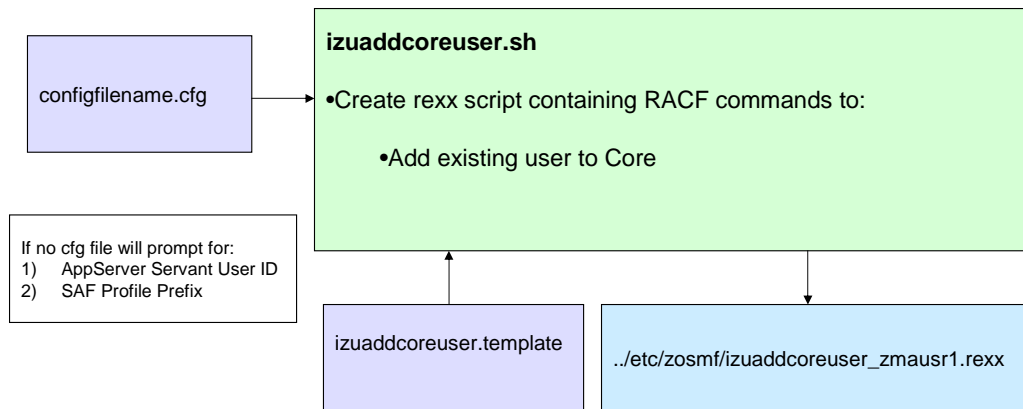

Adding a user to the core functions can be done using the `izuaddcoreuser.sh` script. Using a template file, values are applied to the template file to create a RACF rexx script containing the RACF commands to add the specified user to the core functions. In this example, the output rexx script will be named `izuaddcoreuser_zmausr1.rexx`.

This script can be passed in the configuration file used for the z/OSMF configuration. Or, if the file is omitted, the caller will be prompted for the values required.


The required values are AppServer Servant User ID and SAF Profile Prefix

Setting up Sysplex Dump Directory

- If Sysplex dump directory is not setup, follow the steps below to Allocate and activate Sysplex Dump Directory (SYS1.DDIR) on user specified volume.
 - ▶ This value is stored in the BLSCUSER member in PARMLIB
- Syntax: `izusetupsddir.sh -volume VOLUME -cim /usr/lpp/wbem`
 - CIM server must be configured and running
 - It uses the Incident Log IVP CIM Providers to activate the Sysplex Dump Directory.
 - The volume specified must be allocated before calling the script.
 - On the `-cim` argument, must specify the path to `IZU_WBEM_ROOT`
 - Export `IZU_WBEM_ROOT`
 - ▶ Calls `izusetupsddir.rexx`:
 - Calls `BLSCDDIR` to format a Sysplex Dump Directory (SYS1.DDIR) on volume ZOSMF.
 - ▶ Calls `IBMzOS_SysplexDumpDirectory Provider (ActivateSDDIR)` to activate the SDDIR
 - S `BLSJPRMI`
 - C `DUMPSERV`
- The recommended data set size is 60 cylinders, enough to hold approx 15,000 directory records.

Incident Log requires multiple z/OS dependencies to be setup before the z/OSMF configuration. One of these dependencies is the Sysplex Dump Directory. A script is provided to help in formatting and setting up a Sysplex Dump Directory.


The name of the Sysplex Dump Directory is SYS1.DDIR. This value is stored in the BLSCUSER member in PARMLIB.

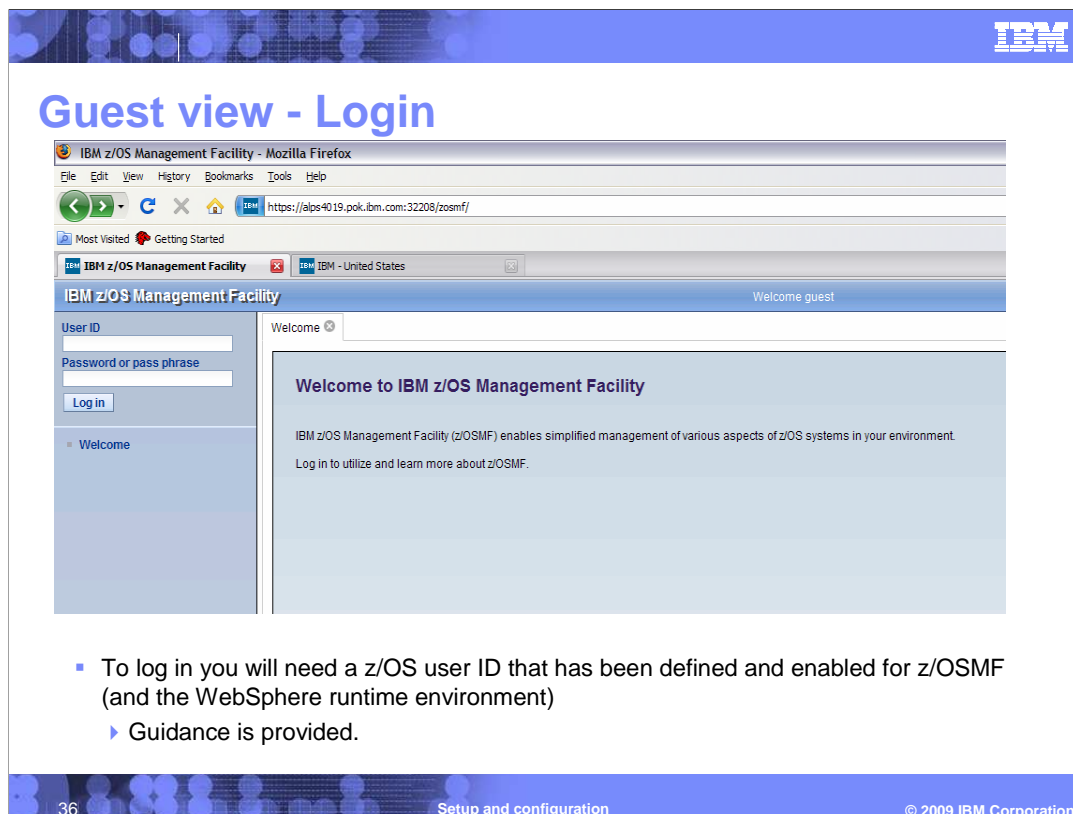

This shows the Welcome page when user first accesses the URL and has not logged in yet

Once z/OSMF has been set up and configured and started on a z/OS system, a z/OS user can access z/OSMF in a browser session. The URL is the host name, the port name and the context route for z/OSMF. The user initially accesses z/OSMF as a 'GUEST' until they login. On the left side is the navigation pane with the login at the top and the large center pane is where the tasks will open up. At this point you can log in with a valid z/OS user ID that has been defined and enabled for z/OSMF and the WebSphere OEM runtime environment.

Client side environment checking tool

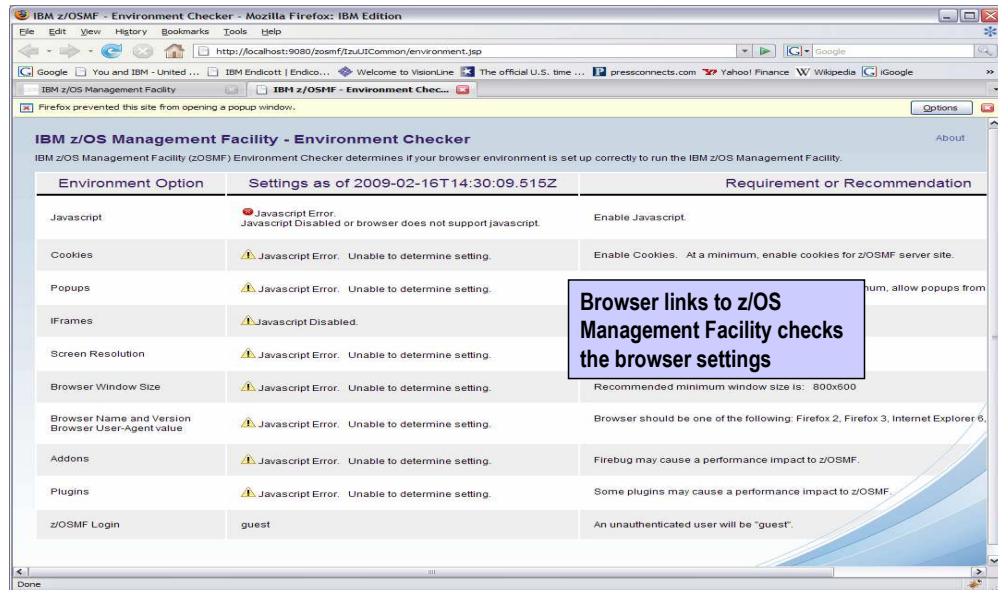

Separate URL to access the tool (documented in the User's Guide). Checker collects the client setup data and indicates any issues for the specific browser being used.

Setting up System Logger log streams

1. Define and start OPERLOG in a system logger log stream.

Define a coupling facility (CF) structure

Activate the operations log (OPERLOG) through the VARY HARDCPY command.

2. Define and start the LOGREC data set in a system logger log stream.

Define a CF structure

Activate it through the SETLOGRC command.

3. Create log streams for CEA.

Create OPERLOG and LOGREC model log streams for the common event adaptor (CEA) component.

4. Define a couple data set for system logger.

Define a couple data set for the system logger component (or update your existing LOGR data set) with a large enough log stream records (LSR) value to allow sufficient space for managing the DASDONLY log streams that will be created for capturing diagnostic log snapshots.

z/OS system will take snapshots of the OPERLOG and LOGREC if these have been setup in the system Logger log stream and the appropriate setting enabled in the parmlib. This is an overview of the high level setup required to achieve that.

Other z/OS setup

1. Start auto-dump.

Start automatic SVC dump data set allocation (auto-dump).

2. Start DAE.

Start dump analysis and elimination (DAE) to ensure that duplicate SVC dumps are suppressed.

3. Ensure that SYSREXX and CEA are active.

Verify that the System REXX (SYSREXX) and CEA components are active. To do so, verify that the AXR and CEA address spaces are active.

4. Ensure that SYS1.MIGLIB is APF-authorized.

The SYS1.MIGLIB data set requires APF authorization to allow AMATERSE to be called by SYSREXX execs, which are authorized.

1. Start SVC automatic dump data set allocation.

- Define the dump data set naming convention to be used by the system. Specify it using the “DUMPDS NAME=” command, for example:

```
$sysplex..DUMP.D&date..T&time..&sysname..&S&seq
```

- Determine where the dumps are to be stored. You should use an SMS storage class or a shared DASD volume for dumps. Examples:

```
DUMPDS ADD,SMS=class
```

```
DUMPDS ADD,VOL=(volser,volser,volser,..)
```

- Start the function through the following command:

```
DUMPDS ALLOC=ACTIVE
```

- For more information:

- Topic on the DUMPDS command in *z/OS MVS System Commands*, SA22-7627

- Topic on SVC Dump in *z/OS Tools and Service Aids*, GA22-7589.

2. Start DAE - see *z/OS MVS Diagnosis: Tools and Service Aids*, GA22-7589.

3. Ensure that SYSREXX and CEA address spaces are active

4. Ensure that SYS1.MIGLIB is APF-authorized

Additional information

- Program Directory for z/OS Management Facility
GI11-2886-00
- IBM z/OS Management Facility License Information
GC52-1263-00
- IBM z/OS Management Facility User's Guide SA38-0652-00
- IBM WebSphere Application Server OEM Edition
for z/OS Configuration Guide, Version 7.0,
GA32-0631-00
- z/OS Management Facility Web Page
 - ▶ <http://www.ibm.com/systems/z/os/zos/zosmf/>

The following information is provided for reference.

Feedback

Your feedback is valuable

You can help improve the quality of IBM Education Assistant content to better meet your needs by providing feedback.

- Did you find this module useful?
- Did it help you solve a problem or answer a question?
- Do you have suggestions for improvements?

Click to send e-mail feedback:

mailto:iea@us.ibm.com?subject=Feedback_about_SetupConfig.ppt

This module is also available in PDF format at: [../SetupConfig.pdf](http://SetupConfig.pdf)

You can help improve the quality of IBM Education Assistant content by providing feedback.

Trademarks, copyrights, and disclaimers

IBM, the IBM logo, ibm.com, and the following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

IBM RACF WebSphere z/OS

If these and other IBM trademarked terms are marked on their first occurrence in this information with a trademark symbol (® or ™), these symbols indicate U.S. registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of other IBM trademarks is available on the Web at "Copyright and trademark information" at <http://www.ibm.com/legal/copytrade.shtml>

Internet Explorer, Windows, and the Windows logo are registered trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Java, SUCCESS, ZFS, and all Java-based trademarks and logos are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.

Product data has been reviewed for accuracy as of the date of initial publication. Product data is subject to change without notice. This document could include technical inaccuracies or typographical errors. IBM may make improvements or changes in the products or programs described herein at any time without notice. Any statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only. References in this document to IBM products, programs, or services does not imply that IBM intends to make such products, programs or services available in all countries in which IBM operates or does business. Any reference to an IBM Program Product in this document is not intended to state or imply that only that program product may be used. Any functionally equivalent program, that does not infringe IBM's intellectual property rights, may be used instead.

THE INFORMATION PROVIDED IN THIS DOCUMENT IS DISTRIBUTED "AS IS" WITHOUT ANY WARRANTY, EITHER EXPRESS OR IMPLIED. IBM EXPRESSLY DISCLAIMS ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT. IBM shall have no responsibility to update this information. IBM products are warranted, if at all, according to the terms and conditions of the agreements (for example, IBM Customer Agreement, Statement of Limited Warranty, International Program License Agreement, etc.) under which they are provided. Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products in connection with this publication and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products.

IBM makes no representations or warranties, express or implied, regarding non-IBM products and services.

The provision of the information contained herein is not intended to, and does not, grant any right or license under any IBM patents or copyrights. Inquiries regarding patent or copyright licenses should be made, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

Performance is based on measurements and projections using standard IBM benchmarks in a controlled environment. All customer examples described are presented as illustrations of how those customers have used IBM products and the results they may have achieved. The actual throughput or performance that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput or performance improvements equivalent to the ratios stated here.

© Copyright International Business Machines Corporation 2009. All rights reserved.

Note to U.S. Government Users - Documentation related to restricted rights-Use, duplication or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract and IBM Corp.