

IBM Application Performance Analyzer for z/OS



# User's Guide

*Version 13 Release 1*



IBM Application Performance Analyzer for z/OS



# User's Guide

*Version 13 Release 1*

**Note**

Before using this information and the product it supports, be sure to read the general information under Notices.

This edition applies to IBM Application Performance Analyzer for z/OS Version 13 Release 1 (5697-Q03) and to any subsequent releases until otherwise indicated in new editions. Make sure you are using the correct edition for the level of Application Performance Analyzer.

You can order publications online at [www.ibm.com/shop/publications/order](http://www.ibm.com/shop/publications/order), or order by phone or fax. IBM Software Manufacturing Solutions takes publication orders between 8:30 a.m. and 7:00 p.m. Eastern Standard Time (EST). The phone number is (800) 879-2755. The fax number is (800) 445-9269.

You can find out more about IBM Application Performance Analyzer for z/OS by visiting the IBM Web site for Application Performance Analyzer at: [www.ibm.com/software/awdtools/apa/](http://www.ibm.com/software/awdtools/apa/)

**Copyright © 2010, 2016 BankNet. All rights reserved.**

**© Copyright IBM Corporation 1992, 2016.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.



# Contents

Tables . . . . .	xix
------------------	-----

About this document . . . . .	xxi
Documentation conventions. . . . .	xxi

<b>Changes introduced with IBM Application Performance Analyzer V13.1. . . . .</b>	<b>xxiii</b>
Changes introduced with IBM Application Performance Analyser V13.1 . . . . .	xxiii

## Chapter 1. Using Application Performance Analyzer/ISPF . . . . . 1

ISPF reports: navigation and control . . . . .	1
Scrolling . . . . .	1
Report headings . . . . .	1
Action (menu) bar . . . . .	1
Retaining open reports . . . . .	2
Displaying HELP . . . . .	2
Primary commands for report navigation. . . . .	2
Line commands for report navigation . . . . .	4
R02 - Observation session list. . . . .	8
Input fields . . . . .	9
Description of detail lines . . . . .	9
Detail window . . . . .	12
R01 - Application Performance Analyzer performance reports menu . . . . .	13

## Chapter 2. Entering observation requests . . . . . 15

Entering an observation request . . . . .	15
Using the NEW command . . . . .	15
Using the MOD line command . . . . .	16
Schedule New Measurement panels . . . . .	16
Panel 1 – Job Information. . . . .	17
Panel 2 – Options . . . . .	22
Panel 3 – Multi-steps . . . . .	28
Panel 4 – Active Jobs . . . . .	29
Panel 5 – Subsystems . . . . .	31
Panel 6 – Sysplex . . . . .	37
Panel 7 – Schedule . . . . .	38
Panel 8 – Sched Options . . . . .	41
Entering a Threshold Monitor request . . . . .	44
Overview . . . . .	44
Using the TNEW command . . . . .	44
Setting Threshold Requirements panels . . . . .	45
Panel 3 - Criteria . . . . .	45
Entering a Trigger request . . . . .	46
Overview . . . . .	46
Using the TR line command. . . . .	46

## Chapter 3. Performance analysis reports. . . . . 47

Performance analysis basics . . . . .	48
Sampling and system states . . . . .	48
Types of system states . . . . .	49
System objects . . . . .	49
Quantities expressed as percentages . . . . .	49
Margin of error . . . . .	50
Color coding of graphs . . . . .	50
Report categories and codes . . . . .	51
S01 - Measurement profile . . . . .	56
Usage . . . . .	56
Performance graphs . . . . .	56
Overall CPU activity . . . . .	56
CPU usage distribution . . . . .	56
Most CPU active modules . . . . .	57
Most CPU active CSECTs. . . . .	57
CPU modes . . . . .	58
Most active IMS PSBs . . . . .	58
Most active DLI calls . . . . .	59
Most active DB2 plans. . . . .	59
Most active packages/DBRMs . . . . .	59
Most active SQL statements . . . . .	59
Measurement values . . . . .	60
Request parameters. . . . .	60
Measurement environment . . . . .	61
Measurement statistics. . . . .	62
CPU consumption . . . . .	63
zAAP CPU consumption . . . . .	63
DDF CPU consumption . . . . .	64
Client enclave consumption . . . . .	64
Sample reports . . . . .	64
S02 - Load module attributes . . . . .	67
SETUP options . . . . .	68
S03 - Load module summary . . . . .	69
Detail line descriptions . . . . .	69
Line commands . . . . .	70
SETUP options . . . . .	70
Detail window . . . . .	70
S04 - TCB summary . . . . .	71
Overview . . . . .	71
Detail line descriptions . . . . .	71
Line commands . . . . .	72
Detail window . . . . .	72
S05 - Memory usage timeline . . . . .	73
Overview . . . . .	73
Detail line descriptions . . . . .	73
Line commands . . . . .	74
SETUP options . . . . .	74
S06 - Data space usage timeline. . . . .	75
Overview . . . . .	75
Detail line descriptions . . . . .	75
Line commands . . . . .	75
SETUP options . . . . .	76
S07 - TCB execution summary . . . . .	76

Overview . . . . .	76	Detail window . . . . .	113
Detail line descriptions . . . . .	77	C08 - CPU usage referred attribution . . . . .	114
Line commands . . . . .	78	Usage . . . . .	114
S08 - Processor utilization summary . . . . .	78	Quantification . . . . .	114
Usage . . . . .	78	Detail line hierarchy . . . . .	114
Quantification . . . . .	78	Detail line descriptions . . . . .	114
Sample reports . . . . .	80	Sample reports . . . . .	116
S09 - Measurement analysis . . . . .	80	Line commands . . . . .	117
Usage . . . . .	80	SETUP options . . . . .	118
Sample reports . . . . .	81	Detail window . . . . .	118
S10 - Observation Session Messages . . . . .	81	C09 - CPU usage by PSW/object code . . . . .	120
Usage . . . . .	81	Quantification . . . . .	120
Category Descriptions . . . . .	82	Detail line hierarchy . . . . .	120
SETUP options . . . . .	82	Detail line descriptions . . . . .	120
C01 - CPU usage by category . . . . .	82	Sample reports . . . . .	121
Overview . . . . .	82	Line commands . . . . .	121
Detail line descriptions . . . . .	83	Detail window . . . . .	122
Subset reports . . . . .	87	C10 - CPU Usage by Natural Program . . . . .	123
Line commands . . . . .	87	Quantification . . . . .	123
SETUP options . . . . .	88	Detail line hierarchy . . . . .	123
Detail window . . . . .	89	Detail line descriptions . . . . .	123
C02 - CPU usage by module. . . . .	90	Sample reports . . . . .	124
Overview . . . . .	90	Line commands . . . . .	124
Detail line descriptions . . . . .	90	Detail window . . . . .	125
Line commands . . . . .	91	W01 - WAIT time by task/category . . . . .	125
Detail window . . . . .	92	Overview. . . . .	125
SETUP options . . . . .	93	Detail line descriptions . . . . .	126
C03 - CPU usage by code slice . . . . .	93	Line commands . . . . .	128
Overview . . . . .	93	SETUP options . . . . .	129
Detail line descriptions . . . . .	95	Detail window . . . . .	130
Line commands . . . . .	95	W02 - WAIT time by task/module . . . . .	130
SETUP options . . . . .	96	Overview. . . . .	130
Detail window . . . . .	96	Detail line descriptions . . . . .	130
C04 - CPU usage timeline . . . . .	97	Line commands . . . . .	132
Overview . . . . .	97	SETUP options . . . . .	133
Detail line descriptions . . . . .	97	Detail window . . . . .	133
Subset reports . . . . .	98	W03 - WAIT time referred attribution . . . . .	134
Line commands . . . . .	98	Usage . . . . .	134
SETUP options . . . . .	98	Quantification . . . . .	134
Detail window . . . . .	98	Detail line hierarchy . . . . .	134
C05 - CPU usage by task/category . . . . .	99	Detail line descriptions . . . . .	134
Overview . . . . .	99	Sample reports . . . . .	136
Detail line descriptions . . . . .	100	Line commands . . . . .	136
Line commands . . . . .	104	SETUP options . . . . .	137
SETUP options . . . . .	105	W04 - WAIT time by task ENQ/RESERVE. . . . .	137
Detail window . . . . .	105	Usage . . . . .	137
C06 - CPU usage by task/module . . . . .	106	Quantification . . . . .	137
Overview. . . . .	106	Detail line hierarchy . . . . .	138
Detail line descriptions . . . . .	106	Detail line descriptions . . . . .	138
Sample reports . . . . .	107	Sample reports . . . . .	139
Line commands . . . . .	108	Line commands . . . . .	139
SETUP options . . . . .	109	Detail window . . . . .	140
Detail window . . . . .	109	W05 - WAIT time by tape DDNAME . . . . .	140
C07 - CPU usage by procedure . . . . .	110	Usage . . . . .	140
Usage . . . . .	110	Quantification . . . . .	140
Quantification . . . . .	110	Detail line descriptions . . . . .	140
Detail line hierarchy . . . . .	110	Sample reports . . . . .	141
Detail line descriptions . . . . .	111	Line commands . . . . .	141
Sample reports . . . . .	112	Detail window . . . . .	141
Line commands . . . . .	112	D01 - DASD usage by device . . . . .	142
SETUP options . . . . .	112	Overview. . . . .	142

Detail line descriptions . . . . .	143	Quantification . . . . .	167
Line commands . . . . .	143	Detail line hierarchy . . . . .	167
Detail window . . . . .	144	Detail line descriptions . . . . .	167
SETUP options . . . . .	144	Sample reports . . . . .	168
D02 - DASD usage by DDNAME . . . . .	144	G03 - Coupling facility total times . . . . .	168
Overview . . . . .	144	Usage . . . . .	168
Detail line descriptions . . . . .	145	Quantification . . . . .	168
Line commands . . . . .	145	Detail line hierarchy . . . . .	168
Detail window . . . . .	146	Detail line descriptions . . . . .	168
SETUP options . . . . .	147	Sample reports . . . . .	169
D03 - DASD usage by data set . . . . .	147	K01- CPU SRB Usage by SRB Type . . . . .	169
Overview . . . . .	147	Usage . . . . .	169
Detail line descriptions . . . . .	148	Quantification . . . . .	169
Line commands . . . . .	148	Detail Line Hierarchy . . . . .	169
Detail window . . . . .	148	Detail Line Descriptions . . . . .	170
SETUP options . . . . .	149	Sample reports . . . . .	172
D04 - Data set attributes . . . . .	149	Line commands . . . . .	172
D05 - DASD EXCP summary . . . . .	151	Detail Window . . . . .	173
Usage . . . . .	151	SETUP Options . . . . .	174
Quantification . . . . .	151	K02- CPU SRB Usage by PSW/ObjCode . . . . .	174
Detail line hierarchy . . . . .	151	Usage . . . . .	174
Detail line descriptions . . . . .	152	Quantification . . . . .	174
Sample reports . . . . .	152	Detail Line Hierarchy . . . . .	174
Line commands . . . . .	153	Detail Line Descriptions . . . . .	175
SETUP options . . . . .	153	Sample reports . . . . .	176
Detail window . . . . .	153	Line commands . . . . .	176
D06 - DASD VSAM statistics . . . . .	154	Detail Window . . . . .	177
Usage . . . . .	154	V01 - Measurement variance summary . . . . .	177
Quantification . . . . .	154	Usage . . . . .	177
Detail line hierarchy . . . . .	154	Measurements analyzed . . . . .	177
Detail line descriptions . . . . .	154	Variances . . . . .	178
Sample reports . . . . .	155	Sample reports . . . . .	179
Line commands . . . . .	155	V02 - CICS variance summary . . . . .	180
SETUP options . . . . .	155	Usage . . . . .	180
Detail window . . . . .	156	Measurements analyzed . . . . .	180
D07 - DASD activity timeline . . . . .	157	Variances . . . . .	180
Usage . . . . .	157	Sample reports . . . . .	181
Quantification . . . . .	157	V03 - DB2 variance summary . . . . .	183
Detail line descriptions . . . . .	157	Usage . . . . .	183
Sample reports . . . . .	158	Measurements analyzed . . . . .	183
Line commands . . . . .	158	Variances . . . . .	183
SETUP options . . . . .	158	Sample reports . . . . .	184
Detail window . . . . .	159	V04 - IMS variance summary . . . . .	187
D08 - DASD I/O wait time . . . . .	159	Usage . . . . .	187
Usage . . . . .	159	Measurements analyzed . . . . .	187
Quantification . . . . .	159	Variances . . . . .	188
Detail line hierarchy . . . . .	160	Sample reports . . . . .	189
Detail line descriptions . . . . .	160		
Sample reports . . . . .	161	<b>Chapter 4. CICS performance analysis</b>	
Line commands . . . . .	162	<b>reports . . . . . 193</b>	
Detail window . . . . .	163	Overview of CICS data extractor . . . . .	193
D09 - VSAM buffer pool usage . . . . .	164	Session statistics . . . . .	193
Usage . . . . .	164	Transaction measurement data . . . . .	194
Quantification . . . . .	164	CICS+ Extractor . . . . .	194
Sample reports . . . . .	165	Overview of CICS Multiple Address Space Support . . . . .	194
G01 - Coupling facility summary . . . . .	165	E01 - CICS session statistics . . . . .	195
Usage . . . . .	165	Usage . . . . .	195
Facility summary . . . . .	166	Detail line descriptions . . . . .	195
Sample reports . . . . .	166	Sample reports . . . . .	197
G02 - Coupling facility mean times . . . . .	167	E02 - CICS CPU and use count by program . . . . .	198
Usage . . . . .	167	Usage . . . . .	198

Quantification . . . . .	198	Detail window . . . . .	257
Detail line hierarchy . . . . .	198	E10 - CICS mean service time by user ID . . . . .	259
Sample reports . . . . .	199	Usage . . . . .	259
Detail line descriptions . . . . .	199	Quantification . . . . .	259
Line commands . . . . .	199	Detail line hierarchy . . . . .	260
Detail window . . . . .	200	Detail line descriptions . . . . .	260
E03 - CICS CPU usage by transaction . . . . .	200	Sample reports . . . . .	265
Usage . . . . .	200	Line commands . . . . .	266
Quantification . . . . .	200	Detail window . . . . .	266
Detail line hierarchy . . . . .	201	E11 - CICS total service time by user ID . . . . .	267
Sample reports . . . . .	201	Usage . . . . .	267
Detail line descriptions . . . . .	202	Quantification . . . . .	267
Line commands . . . . .	205	Detail line hierarchy . . . . .	267
Detail window . . . . .	205	Detail line descriptions . . . . .	268
SETUP options . . . . .	207	Sample reports . . . . .	273
E04 - CICS mean service time by transaction . . . . .	207	Line commands . . . . .	273
Usage . . . . .	207	Detail window . . . . .	274
Quantification . . . . .	207	E12 - CICS CPU/service time by transaction . . . . .	274
Detail line hierarchy . . . . .	208	Usage . . . . .	274
Sample reports . . . . .	208	Quantification . . . . .	275
Detail line descriptions . . . . .	209	Detail line hierarchy . . . . .	275
Line commands . . . . .	216	Detail line descriptions . . . . .	275
Detail window . . . . .	216	Sample reports . . . . .	276
E05 - CICS total service time by Txn. . . . .	218	Line commands . . . . .	276
Usage . . . . .	218	Detail window . . . . .	277
Quantification . . . . .	218		
Detail line hierarchy . . . . .	218		
Detail line descriptions . . . . .	219		
Sample reports . . . . .	226		
Line commands . . . . .	227		
Detail window . . . . .	227		
E06 - CICS service time by task ID . . . . .	229		
Usage . . . . .	229		
Quantification . . . . .	229		
Detail line hierarchy . . . . .	229		
Detail line descriptions . . . . .	230		
Sample reports . . . . .	238		
Line commands . . . . .	238		
Detail window . . . . .	239		
E07 - CICS wait by Txn . . . . .	239		
Usage . . . . .	239		
Quantification . . . . .	240		
Detail line hierarchy . . . . .	240		
Detail line descriptions . . . . .	240		
Sample reports . . . . .	241		
Line commands . . . . .	241		
E08 - CICS mean service time by terminal ID. . . . .	241		
Usage . . . . .	241		
Quantification . . . . .	241		
Detail line hierarchy . . . . .	242		
Detail line descriptions . . . . .	242		
Sample reports . . . . .	247		
Line commands . . . . .	248		
Detail window . . . . .	249		
E09 - CICS total service time by terminal ID . . . . .	250		
Usage . . . . .	250		
Quantification . . . . .	250		
Detail line hierarchy . . . . .	250		
Detail line descriptions . . . . .	251		
Sample reports . . . . .	256		
Line commands . . . . .	257		

<b>Chapter 5. IMS performance analysis reports . . . . . 279</b>	
Overview of IMS data extractor . . . . .	280
IMS+ extractor . . . . .	280
Overview of IMS Multiple Address Space Support . . . . .	280
I01 - IMS measurement profile. . . . .	281
Usage . . . . .	281
IMS environment . . . . .	281
Performance graphs . . . . .	281
Transaction statistics . . . . .	283
DLI call statistics . . . . .	284
Sample reports . . . . .	285
I02 - IMS DL/I call timeline . . . . .	286
Usage . . . . .	286
Quantification . . . . .	286
Detail line hierarchy . . . . .	286
Detail line descriptions . . . . .	286
Sample reports . . . . .	287
Line commands . . . . .	287
I03 - IMS transaction timeline . . . . .	287
Usage . . . . .	287
Quantification . . . . .	287
Detail line hierarchy . . . . .	288
Detail line descriptions . . . . .	288
Sample reports . . . . .	288
Line commands . . . . .	289
I04 - IMS transaction activity timeline . . . . .	289
Usage . . . . .	289
Quantification . . . . .	289
Detail line descriptions . . . . .	290
Sample reports . . . . .	290
Line commands . . . . .	290
Detail lines for reports I05 through I13 . . . . .	291
Detail lines reported for PSW sampling. . . . .	291
I05 - IMS DL/I CPU usage by PSB . . . . .	295

Usage . . . . .	295	Line commands . . . . .	319
Quantification . . . . .	295	Detail window . . . . .	320
Detail line hierarchy . . . . .	295	I13 - IMS DL/I activity by DL/I call. . . . .	321
Detail line descriptions . . . . .	296	Usage . . . . .	321
Sample reports . . . . .	296	Quantification . . . . .	321
Line commands . . . . .	296	Detail line hierarchy . . . . .	321
Detail window . . . . .	297	Detail line descriptions . . . . .	321
I06 - IMS DL/I CPU usage by transaction . . . . .	298	Sample reports . . . . .	322
Usage . . . . .	298	Line commands . . . . .	322
Quantification . . . . .	298	Detail window . . . . .	323
Detail line hierarchy . . . . .	299	I14 - IMS PSB/PCB attributes . . . . .	324
Detail line descriptions . . . . .	299	Usage . . . . .	324
Sample reports . . . . .	300	Detail line descriptions . . . . .	324
Line commands . . . . .	300	Sample reports . . . . .	325
Detail window . . . . .	301	I15 - IMS DL/I call attributes . . . . .	325
I07 - IMS DL/I CPU usage by DL/I call . . . . .	302	Usage . . . . .	325
Usage . . . . .	302	Detail line descriptions . . . . .	325
Quantification . . . . .	302	Sample reports . . . . .	326
Detail line hierarchy . . . . .	302	I16 - IMS transaction service times . . . . .	326
Detail line descriptions . . . . .	302	Usage . . . . .	326
Sample reports . . . . .	303	Quantification . . . . .	327
Line commands . . . . .	303	Detail line hierarchy . . . . .	327
Detail window . . . . .	304	Detail line descriptions . . . . .	327
I08 - IMS DL/I WAIT time by PSB . . . . .	305	Sample reports . . . . .	327
Usage . . . . .	305	Line commands . . . . .	327
Quantification . . . . .	305	Detail window . . . . .	328
Detail line hierarchy . . . . .	305	I17 - IMS transaction DL/I call counts . . . . .	328
Detail line descriptions . . . . .	306	Usage . . . . .	328
Sample reports . . . . .	306	Quantification . . . . .	328
Line commands . . . . .	306	Detail line hierarchy . . . . .	328
Detail window . . . . .	307	Detail line descriptions . . . . .	328
I09 - IMS DL/I WAIT time by transaction . . . . .	308	Sample reports . . . . .	329
Usage . . . . .	308	Line commands . . . . .	329
Quantification . . . . .	308	Detail window . . . . .	330
Detail line hierarchy . . . . .	309	I18 - IMS CPU/Svc time by DL/I calls . . . . .	330
Detail line descriptions . . . . .	309	Usage . . . . .	330
Sample reports . . . . .	310	Quantification . . . . .	330
Line commands . . . . .	310	Detail line hierarchy . . . . .	330
Detail window . . . . .	311	Detail line descriptions . . . . .	330
I10 - IMS DL/I WAIT time by DL/I call . . . . .	311	Sample reports . . . . .	331
Usage . . . . .	311	Line commands . . . . .	331
Quantification . . . . .	311	Detail window . . . . .	332
Detail line hierarchy . . . . .	312	I19 - IMS CPU/Svc time by PSB . . . . .	332
Detail line descriptions . . . . .	312	Usage . . . . .	332
Sample reports . . . . .	312	Quantification . . . . .	332
Line commands . . . . .	312	Detail line hierarchy . . . . .	332
Detail window . . . . .	313	Detail line descriptions . . . . .	332
I11 - IMS DL/I activity by PSB . . . . .	314	Sample reports . . . . .	333
Usage . . . . .	314	Line commands . . . . .	333
Quantification . . . . .	314	Detail window . . . . .	333
Detail line hierarchy . . . . .	314	I20 - IMS CPU/Svc time by transaction. . . . .	334
Detail line descriptions . . . . .	315	Usage . . . . .	334
Sample reports . . . . .	315	Quantification . . . . .	334
Line commands . . . . .	315	Detail line hierarchy . . . . .	334
Detail window . . . . .	317	Detail line descriptions . . . . .	334
I12 - IMS DL/I activity by transaction . . . . .	317	Sample reports . . . . .	335
Usage . . . . .	317	Line commands . . . . .	335
Quantification . . . . .	317	Detail window . . . . .	335
Detail line hierarchy . . . . .	317	I21 - IMS CPU/Svc time by PCB . . . . .	336
Detail line descriptions . . . . .	318	Usage . . . . .	336
Sample reports . . . . .	319	Quantification . . . . .	336

Detail line hierarchy . . . . .	336	Usage . . . . .	363
Detail line descriptions . . . . .	336	Quantification . . . . .	364
Sample reports . . . . .	337	Detail line hierarchy . . . . .	364
Line commands . . . . .	337	Detail line descriptions . . . . .	364
Detail window . . . . .	337	Sample reports . . . . .	365
I22 - IMS Region Transaction Summary . . . . .	338	Line commands . . . . .	365
Usage . . . . .	338	Detail window . . . . .	366
Quantification . . . . .	339	SETUP options . . . . .	366
Detail line hierarchy . . . . .	339	F06 - DB2 SQL statement attributes . . . . .	366
Detail line descriptions . . . . .	339	Usage . . . . .	366
Sample reports . . . . .	340	Sample reports . . . . .	368
Line commands . . . . .	340	F07 - DB2 SQL wait time by DBRM . . . . .	369
Detail window . . . . .	340	Usage . . . . .	369
		Quantification . . . . .	369
		Detail line hierarchy . . . . .	369
		Detail line descriptions . . . . .	369
		Sample reports . . . . .	370
		Line commands . . . . .	371
		SETUP options . . . . .	371
		F08 - DB2 SQL wait time by statement . . . . .	372
		Usage . . . . .	372
		Quantification . . . . .	372
		Detail line hierarchy . . . . .	372
		Detail line descriptions . . . . .	373
		Sample reports . . . . .	373
		Line commands . . . . .	373
		SETUP options . . . . .	374
		F09 - DB2 SQL wait time by plan . . . . .	374
		Usage . . . . .	374
		Quantification . . . . .	375
		Detail line hierarchy . . . . .	375
		Detail line descriptions . . . . .	375
		Sample reports . . . . .	376
		Line commands . . . . .	376
		SETUP options . . . . .	377
		F10 - DB2 SQL CPU/Svc time by DBRM . . . . .	377
		Usage . . . . .	377
		Quantification . . . . .	377
		Detail line descriptions . . . . .	378
		Sample reports . . . . .	379
		Line commands . . . . .	379
		SETUP options . . . . .	380
		F11 - DB2 SQL CPU/Svc time by stmt . . . . .	380
		Usage . . . . .	380
		Quantification . . . . .	380
		Detail line hierarchy . . . . .	381
		Detail line descriptions . . . . .	381
		Sample reports . . . . .	382
		Line commands . . . . .	382
		SETUP options . . . . .	383
		F12 - DB2 SQL CPU/Svc time by plan . . . . .	383
		Usage . . . . .	383
		Quantification . . . . .	384
		Detail line hierarchy . . . . .	384
		Detail line descriptions . . . . .	384
		Sample reports . . . . .	385
		Line commands . . . . .	386
		SETUP options . . . . .	387
		F13 - DB2 SQL threads analysis . . . . .	387
		Usage . . . . .	387
		Quantification . . . . .	387

## Chapter 6. DB2 performance analysis reports . . . . . 343

Overview of DB2 data extractor . . . . .	344
The DB2+ data extractor . . . . .	344
Measuring DDF activity . . . . .	344
Displaying SQL Statement Text . . . . .	345
SQL statement text formatting . . . . .	346
SQL statement sequence numbers . . . . .	346
Overview of DB2 Multiple Address Space Support . . . . .	346
F01 - DB2 measurement . . . . .	347
Usage . . . . .	347
Performance graphs . . . . .	347
Most Active DB2 Plans . . . . .	348
Most active package/DBRMs . . . . .	348
Most active SQL statements . . . . .	348
Most CPU consumptive SQL . . . . .	348
Most frequent SQL statements . . . . .	349
Single SQL call service time . . . . .	349
DB2 measurement statistics . . . . .	349
Sample reports . . . . .	350
F02 - DB2 SQL activity timeline . . . . .	352
Usage . . . . .	352
Quantification . . . . .	352
Detail line hierarchy . . . . .	352
Detail line descriptions . . . . .	352
Sample reports . . . . .	353
Line commands . . . . .	354
Detail window . . . . .	354
F03 - DB2 SQL activity by DBRM . . . . .	355
Usage . . . . .	355
Quantification . . . . .	356
Detail line hierarchy . . . . .	356
Detail line descriptions . . . . .	356
Sample reports . . . . .	357
Line commands . . . . .	357
Detail window . . . . .	358
SETUP options . . . . .	359
F04 - DB2 SQL activity by statement . . . . .	359
Usage . . . . .	359
Quantification . . . . .	359
Detail line hierarchy . . . . .	360
Detail line descriptions . . . . .	360
Sample reports . . . . .	361
Line commands . . . . .	361
Detail window . . . . .	362
SETUP options . . . . .	363
F05 - DB2 SQL activity by plan . . . . .	363

Detail line hierarchy . . . . .	387
Detail line descriptions . . . . .	387
Sample reports . . . . .	388
F14 - DB2 CPU by plan/stored proc. . . . .	388
Usage . . . . .	388
Quantification . . . . .	388
Detail line hierarchy . . . . .	388
Detail line descriptions . . . . .	389
Sample reports . . . . .	390
Line commands . . . . .	390
SETUP options . . . . .	391
F15 - DB2 SQL CPU/Svc Time by Rq Loc . . . . .	392
Usage . . . . .	392
Quantification . . . . .	392
Detail line hierarchy . . . . .	392
Detail line descriptions . . . . .	392
Sample reports . . . . .	393
Line commands . . . . .	394
SETUP options . . . . .	394
F16 - DB2 SQL CPU/Svc Time by Enclave. . . . .	395
Usage . . . . .	395
Quantification . . . . .	395
Detail line hierarchy . . . . .	395
Detail line descriptions . . . . .	396
Sample reports . . . . .	397
Line commands . . . . .	397
SETUP options . . . . .	398
F17 - DB2 SQL CPU/Svc Time by Corrid . . . . .	398
Usage . . . . .	398
Quantification . . . . .	398
Detail line hierarchy . . . . .	399
Detail line descriptions . . . . .	399
Sample reports . . . . .	400
Line commands . . . . .	401
SETUP options . . . . .	402
F18 - DB2 SQL CPU/Svc Time by Wkstn . . . . .	402
Usage . . . . .	402
Quantification . . . . .	402
Detail line hierarchy . . . . .	403
Detail line descriptions . . . . .	403
Sample reports . . . . .	404
Line commands . . . . .	405
SETUP options . . . . .	405
F19 - DB2 SQL CPU/Svc Time by EndUsr. . . . .	406
Usage . . . . .	406
Quantification . . . . .	406
Detail line hierarchy . . . . .	406
Detail line descriptions . . . . .	406
Sample reports . . . . .	407
Line commands . . . . .	408
SETUP options . . . . .	409
F20 - DB2 Class 3 Wait Times . . . . .	409
Usage . . . . .	409
Detail Line descriptions . . . . .	409
Sample reports . . . . .	411
DB2 EXPLAIN report. . . . .	411
Usage . . . . .	411
Static EXPLAIN . . . . .	411
Dynamic EXPLAIN . . . . .	412
Field descriptions . . . . .	412
Sample reports . . . . .	413

Line commands . . . . .	413
Detail window . . . . .	413
DB2SQL category in C01 report . . . . .	415

## Chapter 7. MQSeries performance analysis reports . . . . . 417

Overview of MQSeries data extractor . . . . .	417
Q01 - MQSeries activity summary . . . . .	418
Usage . . . . .	418
Detail line descriptions . . . . .	418
Sample reports . . . . .	420
Q02 - MQSeries CPU usage by queue . . . . .	420
Usage . . . . .	420
Quantification . . . . .	420
Detail line hierarchy . . . . .	420
Detail line descriptions . . . . .	420
Sample reports . . . . .	421
Line commands . . . . .	421
Detail window . . . . .	422
Q03 - MQSeries CPU usage by request . . . . .	423
Usage . . . . .	423
Quantification . . . . .	423
Detail line descriptions . . . . .	423
Sample reports . . . . .	424
Line commands . . . . .	424
Detail window . . . . .	424
Q04 - MQSeries CPU usage by Txn . . . . .	425
Usage . . . . .	425
Quantification . . . . .	425
Detail line hierarchy . . . . .	425
Detail line descriptions . . . . .	425
Sample reports . . . . .	426
Line commands . . . . .	427
Detail window . . . . .	428
Q05 - MQSeries service time by queue . . . . .	428
Usage . . . . .	428
Quantification . . . . .	428
Detail line hierarchy . . . . .	428
Detail line descriptions . . . . .	428
Sample reports . . . . .	429
Line commands . . . . .	429
Detail window . . . . .	430
Q06 - MQSeries service time by request . . . . .	431
Usage . . . . .	431
Quantification . . . . .	431
Detail line hierarchy . . . . .	431
Detail line descriptions . . . . .	431
Sample reports . . . . .	432
Line commands . . . . .	432
Detail window . . . . .	433
Q07 - MQSeries service time by Txn. . . . .	434
Usage . . . . .	434
Quantification . . . . .	434
Detail line hierarchy . . . . .	434
Detail line descriptions . . . . .	434
Sample reports . . . . .	435
Line commands . . . . .	436
Detail window . . . . .	436
Q08 - MQSeries wait time by queue . . . . .	437
Usage . . . . .	437
Quantification . . . . .	437

Detail line hierarchy . . . . .	437	Using a dynamically loaded JVM TI agent . . . . .	461
Detail line descriptions . . . . .	437	Using a preloaded JVM TI agent . . . . .	461
Sample reports . . . . .	438	USS multiple address space measurements . . . . .	462
Line commands . . . . .	438	J01 - Java summary and attributes . . . . .	463
Detail window . . . . .	439	Usage . . . . .	463
Q09 - MQSeries wait time by request . . . . .	440	Sample reports . . . . .	464
Usage . . . . .	440	J02 - Java heap usage timeline . . . . .	465
Quantification . . . . .	440	Overview . . . . .	465
Detail line hierarchy . . . . .	440	Detail line descriptions . . . . .	465
Detail line descriptions . . . . .	440	Sample reports . . . . .	465
Sample reports . . . . .	441	Line commands . . . . .	466
Line commands . . . . .	441	Detail window . . . . .	466
Detail window . . . . .	442	SETUP options . . . . .	466
Q10 - MQSeries wait time by Txn . . . . .	442	J03 - Java CPU usage by thread . . . . .	467
Usage . . . . .	442	Usage . . . . .	467
Quantification . . . . .	442	Quantification . . . . .	467
Detail line hierarchy . . . . .	442	Detail line descriptions . . . . .	467
Detail line descriptions . . . . .	443	Sample reports . . . . .	467
Sample reports . . . . .	444	Line commands . . . . .	468
Line commands . . . . .	444	Detail window . . . . .	468
Detail window . . . . .	445	J04 - Java CPU usage by package . . . . .	469
Q11 - MQ+ Activity Timeline . . . . .	445	Usage . . . . .	469
Usage . . . . .	445	Quantification . . . . .	469
Quantification . . . . .	446	Detail line hierarchy . . . . .	469
Detail Line Hierarchy . . . . .	446	Detail line descriptions . . . . .	469
Detail Line Descriptions . . . . .	446	Sample reports . . . . .	470
Sample Report . . . . .	447	Line commands . . . . .	470
Line commands . . . . .	447	Detail window . . . . .	471
Detail window . . . . .	448	J05 - Java CPU usage by class . . . . .	471
Q12 - MQ+ CPU/SVC Time by Queue . . . . .	448	Usage . . . . .	471
Usage . . . . .	448	Quantification . . . . .	472
Quantification . . . . .	448	Detail line hierarchy . . . . .	472
Detail Line Hierarchy . . . . .	449	Detail line descriptions . . . . .	472
Detail Line Descriptions . . . . .	449	Sample reports . . . . .	473
Sample reports . . . . .	450	Line commands . . . . .	473
Line Commands . . . . .	450	Detail window . . . . .	474
Detail window . . . . .	451	J06 - Java CPU usage by method . . . . .	474
SETUP options . . . . .	451	Usage . . . . .	474
Q13 - MQ+ CPU/SVC Time by Request . . . . .	451	Quantification . . . . .	474
Usage . . . . .	451	Detail line hierarchy . . . . .	475
Quantification . . . . .	451	Detail line descriptions . . . . .	475
Detail Line Hierarchy . . . . .	452	Sample reports . . . . .	475
Detail Line Descriptions . . . . .	452	Line commands . . . . .	476
Sample reports . . . . .	453	Detail window . . . . .	476
Line Commands . . . . .	453	J07 - Java CPU usage by call path . . . . .	477
Detail window . . . . .	454	Usage . . . . .	477
SETUP options . . . . .	454	Quantification . . . . .	477
Q14 - MQ+ CPU/SVC Time by Txn . . . . .	454	Detail line hierarchy . . . . .	477
Usage . . . . .	454	Detail line descriptions . . . . .	478
Quantification . . . . .	455	Sample reports . . . . .	478
Detail Line Hierarchy . . . . .	455	Line commands . . . . .	478
Detail Line Descriptions . . . . .	455	Detail window . . . . .	479
Sample reports . . . . .	457	J09 - Java service time by package . . . . .	480
Line Commands . . . . .	457	Usage . . . . .	480
Detail window . . . . .	458	Quantification . . . . .	480
SETUP options . . . . .	458	Detail line hierarchy . . . . .	480
		Detail line descriptions . . . . .	481
		Sample reports . . . . .	482
		Line commands . . . . .	482
		Detail window . . . . .	483
		J10 - Java service time by class . . . . .	483

**Chapter 8. Java/USS/HFS performance analysis reports . . . . . 459**

Overview of Java data extractor . . . . .	460
Considerations for Java . . . . .	460



Usage . . . . .	483	Detail window . . . . .	505
Quantification . . . . .	483	SETUP options . . . . .	506
Detail line hierarchy . . . . .	484	H02 - HFS Service Time by Device . . . . .	506
Detail line descriptions . . . . .	484	Usage . . . . .	506
Sample reports . . . . .	485	Quantification . . . . .	506
Line commands . . . . .	485	Detail line hierarchy . . . . .	507
Detail window . . . . .	486	Detail line descriptions . . . . .	507
J11 - Java service time by method . . . . .	486	Sample reports . . . . .	507
Usage . . . . .	486	Line commands . . . . .	508
Quantification . . . . .	486	Detail window . . . . .	508
Detail line hierarchy . . . . .	487	SETUP options . . . . .	509
Detail line descriptions . . . . .	487	H03 - HFS File Activity . . . . .	509
Sample reports . . . . .	488	Usage . . . . .	509
Line commands . . . . .	488	Quantification . . . . .	509
Detail window . . . . .	489	Detail line descriptions . . . . .	509
J12 - Java service time by call path . . . . .	489	Sample reports . . . . .	510
Usage . . . . .	489	Line commands . . . . .	510
Quantification . . . . .	489	Detail window . . . . .	510
Detail line hierarchy . . . . .	490	SETUP options . . . . .	511
Detail line descriptions . . . . .	490	H04 - HFS File Attributes . . . . .	511
Sample reports . . . . .	491	Usage . . . . .	511
Line commands . . . . .	491	Detail line descriptions . . . . .	511
Detail window . . . . .	492	Sample reports . . . . .	512
J14 - Java wait time by package . . . . .	492	H05 - HFS Device Activity . . . . .	512
Usage . . . . .	492	Usage . . . . .	512
Quantification . . . . .	492	Quantification . . . . .	512
Detail line hierarchy . . . . .	492	Detail line descriptions . . . . .	513
Detail line descriptions . . . . .	493	Sample reports . . . . .	513
Sample reports . . . . .	494	Line commands . . . . .	513
Line commands . . . . .	494	Detail window . . . . .	513
Detail window . . . . .	495	SETUP options . . . . .	514
J15 - Java wait time by class . . . . .	495	H06 - HFS Device Attributes . . . . .	514
Usage . . . . .	495	Usage . . . . .	514
Quantification . . . . .	495	Detail line descriptions . . . . .	514
Detail line hierarchy . . . . .	495	Sample reports . . . . .	515
Detail line descriptions . . . . .	496	H07 - HFS Activity Timeline . . . . .	515
Sample reports . . . . .	497	Usage . . . . .	515
Line commands . . . . .	497	Quantification . . . . .	515
Detail window . . . . .	498	Detail line descriptions . . . . .	515
J16 - Java wait time by method . . . . .	498	Sample reports . . . . .	516
Usage . . . . .	498	Line commands . . . . .	516
Quantification . . . . .	498	Detail window . . . . .	516
Detail line hierarchy . . . . .	499	SETUP options . . . . .	517
Detail line descriptions . . . . .	499	H08 - HFS Wait Time by Path Name . . . . .	517
Sample reports . . . . .	499	Usage . . . . .	517
Line commands . . . . .	500	Quantification . . . . .	517
Detail window . . . . .	500	Detail line descriptions . . . . .	517
J17 - Java wait time by call path . . . . .	501	Sample reports . . . . .	518
Usage . . . . .	501	Line commands . . . . .	518
Quantification . . . . .	501	Detail window . . . . .	518
Detail line hierarchy . . . . .	501	SETUP options . . . . .	519
Detail line descriptions . . . . .	502	H09- HFS Wait Time by Device . . . . .	519
Sample reports . . . . .	502	Usage . . . . .	519
Line commands . . . . .	502	Quantification . . . . .	519
Detail window . . . . .	503	Detail line hierarchy . . . . .	519
H01 - HFS Service Time by Path Name . . . . .	504	Detail line descriptions . . . . .	520
Usage . . . . .	504	Sample reports . . . . .	520
Quantification . . . . .	504	Line commands . . . . .	520
Detail line descriptions . . . . .	504	Detail window . . . . .	521
Sample reports . . . . .	505	SETUP options . . . . .	521
Line commands . . . . .	505	H10- HFS Service Time by Request . . . . .	522

Usage . . . . .	522	B07 - WAS EJB Activity by Servant . . . . .	553
Quantification . . . . .	522	Usage . . . . .	553
Detail line hierarchy . . . . .	522	Quantification . . . . .	553
Detail line descriptions . . . . .	522	Detail Line hierarchy . . . . .	554
Sample reports . . . . .	523	Detail Line descriptions . . . . .	554
Line commands . . . . .	523	Sample reports . . . . .	556
Detail window . . . . .	524	Line commands . . . . .	556
SETUP options . . . . .	524	B08 – WAS Servlet/JSP Activity . . . . .	557
H11- HFS Wait Time by Request . . . . .	524	Usage . . . . .	557
Usage . . . . .	524	Quantification . . . . .	557
Quantification . . . . .	524	Detail Line hierarchy . . . . .	557
Detail line hierarchy . . . . .	525	Detail Line descriptions . . . . .	557
Detail line descriptions . . . . .	525	Sample reports . . . . .	559
Sample reports . . . . .	525	Line commands . . . . .	559
Line commands . . . . .	526	B09 - WAS Servlet/JSP by Origin . . . . .	560
Detail window . . . . .	526	Usage . . . . .	560
SETUP options . . . . .	527	Quantification . . . . .	560
		Detail Line hierarchy . . . . .	560
		Detail Line descriptions . . . . .	560
		Sample reports . . . . .	562
		Line commands . . . . .	562
		B10 WAS Servlet/JSP by Servant . . . . .	563
		Usage . . . . .	563
		Quantification . . . . .	563
		Detail Line hierarchy . . . . .	563
		Detail Line descriptions . . . . .	563
		Sample reports . . . . .	565
		Line commands . . . . .	565
		B11 - WAS/CICS Calls . . . . .	566
		Usage . . . . .	566
		Quantification . . . . .	566
		Detail Line Hierarchy . . . . .	567
		Detail Line Descriptions . . . . .	567
		Sample reports . . . . .	568
		Line Commands . . . . .	568
		B12 - WAS/DB2 Calls . . . . .	569
		Usage . . . . .	569
		Quantification . . . . .	569
		Detail Line Hierarchy . . . . .	569
		Detail Line Descriptions . . . . .	569
		Sample reports . . . . .	571
		Line Commands . . . . .	572
		SETUP options . . . . .	572
		B13 - Async Work Requests . . . . .	573
		Usage . . . . .	573
		Quantification . . . . .	573
		Detail Line Hierarchy . . . . .	573
		Detail Line Descriptions . . . . .	573
		Sample reports . . . . .	574
		Line Commands . . . . .	574
		B14 - Async Work by Work Mgr . . . . .	575
		Usage . . . . .	575
		Quantification . . . . .	575
		Detail Line Hierarchy . . . . .	576
		Detail Line Descriptions . . . . .	576
		Sample reports . . . . .	577
		Line Commands . . . . .	577
		B15 - Async Work by Servant . . . . .	578
		Usage . . . . .	578
		Quantification . . . . .	578
		Detail Line Hierarchy . . . . .	578

**Chapter 9. WebSphere performance analysis reports . . . . . 529**

Overview of WAS data extractor . . . . .	530
Measuring WAS servant address space activity . . . . .	530
B01 - WAS Summary . . . . .	531
Usage . . . . .	531
Detail Line descriptions . . . . .	531
Sample reports . . . . .	534
B02 - WAS Activity . . . . .	534
Usage . . . . .	534
Quantification . . . . .	534
Detail Line hierarchy . . . . .	535
Detail Line descriptions . . . . .	535
Sample reports . . . . .	537
Line commands . . . . .	537
B03 - WAS Activity by Origin . . . . .	538
Usage . . . . .	538
Quantification . . . . .	538
Detail Line hierarchy . . . . .	539
Detail Line descriptions . . . . .	539
Sample reports . . . . .	542
Line commands . . . . .	542
B04 - WAS Activity by Servant . . . . .	543
Usage . . . . .	543
Quantification . . . . .	543
Detail Line hierarchy . . . . .	543
Detail Line descriptions . . . . .	543
Sample reports . . . . .	546
Line commands . . . . .	546
B05 - WAS EJB Activity . . . . .	547
Usage . . . . .	547
Quantification . . . . .	547
Detail Line hierarchy . . . . .	548
Detail Line descriptions . . . . .	548
Sample reports . . . . .	549
Line commands . . . . .	549
B06 - WAS EJB Activity by Origin . . . . .	550
Usage . . . . .	550
Quantification . . . . .	550
Detail Line hierarchy . . . . .	550
Detail Line descriptions . . . . .	550
Sample reports . . . . .	552
Line commands . . . . .	552

Detail Line Descriptions . . . . .	578
Sample reports . . . . .	580
Line Commands . . . . .	580
B16 - WOLA Inbound Requests . . . . .	581
Usage . . . . .	581
Quantification . . . . .	581
Detail Line Hierarchy. . . . .	581
Detail Line Descriptions . . . . .	581
Sample reports . . . . .	583
Line Commands . . . . .	583
B17 - WOLA Inbound by Origin . . . . .	584
Usage . . . . .	584
Quantification . . . . .	584
Detail Line Hierarchy. . . . .	584
Detail Line Descriptions . . . . .	584
Sample reports . . . . .	587
Line Commands . . . . .	587
B18 - WOLA Inbound by Servant. . . . .	588
Usage . . . . .	588
Quantification . . . . .	588
Detail Line Hierarchy. . . . .	588
Detail Line Descriptions . . . . .	588
Sample reports . . . . .	591
Line Commands . . . . .	591
B19 - WOLA Outbound Requests. . . . .	592
Usage . . . . .	592
Quantification . . . . .	592
Detail Line Hierarchy. . . . .	592
Detail Line Descriptions . . . . .	592
Sample reports . . . . .	594
Line Commands . . . . .	594
B20 - WOLA Outbound by Register . . . . .	594
Usage . . . . .	594
Quantification . . . . .	595
Detail Line Hierarchy. . . . .	595
Detail Line Descriptions . . . . .	595
Sample reports . . . . .	596
Line Commands . . . . .	596
B21 - WOLA Outbound by Servant . . . . .	597
Usage . . . . .	597
Quantification . . . . .	597
Detail Line Hierarchy. . . . .	597
Detail Line Descriptions . . . . .	597
Sample reports . . . . .	599
Line Commands . . . . .	599

**Chapter 10. Multiple address space reports . . . . . 601**

X01 - CICS mean service time by transaction . . . . .	601
Usage . . . . .	601
Quantification . . . . .	601
Detail line hierarchy . . . . .	601
Detail line descriptions . . . . .	602
Sample reports . . . . .	607
Line commands . . . . .	607
Detail window . . . . .	608
X02 - CICS total service time by txn . . . . .	609
Usage . . . . .	609
Quantification . . . . .	609
Detail line hierarchy . . . . .	609
Detail line descriptions . . . . .	610

Sample reports . . . . .	614
Line commands . . . . .	615
Detail window . . . . .	616
X03 - CICS mean service time by terminal ID. . . . .	616
Usage . . . . .	616
Quantification . . . . .	617
Detail line hierarchy . . . . .	617
Detail line descriptions . . . . .	617
Sample reports . . . . .	623
Line commands . . . . .	623
Detail window . . . . .	624
X04 - CICS total service time by terminal ID . . . . .	624
Usage . . . . .	624
Quantification . . . . .	625
Detail line hierarchy . . . . .	625
Detail line descriptions . . . . .	625
Sample reports . . . . .	631
Line commands . . . . .	631
Detail window . . . . .	632
X05 - Combined DB2 IMS MQ Timeline . . . . .	632
Usage . . . . .	632
Quantification . . . . .	633
Detail Line Hierarchy. . . . .	633
Detail Line Descriptions . . . . .	634
Sample report . . . . .	635
Line commands . . . . .	635

**Chapter 11. Source program mapping 637**

Introduction to source program mapping . . . . .	637
A01 - Source program mapping panel . . . . .	639
Overview. . . . .	639
File specification input area . . . . .	640
List of existing SPM file associations . . . . .	642
Line commands . . . . .	642
A03 - Java source program mapping panel . . . . .	643
Overview. . . . .	643
File prefix specification input area . . . . .	644
Detail lines . . . . .	644
Line commands . . . . .	644
Java report detail window . . . . .	645
A04 - Source mapping dataset list . . . . .	645
Overview. . . . .	645
Match on Compile Date & Time description . . . . .	646
Dataset list description . . . . .	646
Commands to save and edit . . . . .	647
A05 - Source mapping common list . . . . .	647
Overview. . . . .	647
Dataset list description . . . . .	648
Commands to save and edit . . . . .	648
A011 - Source program mapping pick list . . . . .	648
Overview. . . . .	648
Field descriptions . . . . .	649
Pick list description . . . . .	649
P01 - Source program attribution . . . . .	650
Overview. . . . .	650
Code segments . . . . .	651
Detail line descriptions . . . . .	651
SETUP options . . . . .	652
Detail window . . . . .	653
P03 - DWARF Source Program Attribution . . . . .	653
Overview. . . . .	653

Detail line descriptions . . . . .	654
SETUP options . . . . .	655
P04 - DWARF Source Lines . . . . .	655
Overview . . . . .	655
Detail line descriptions . . . . .	656
Line commands . . . . .	657
Detail window . . . . .	657

**Chapter 12. Printing reports and creating XML documents . . . . . 659**

About Application Performance Analyzer's report printing and XML document feature. . . . .	659
Line printer format . . . . .	659
PDF format . . . . .	660
XML document format . . . . .	660
Report sections . . . . .	660
Using the ISPF report request facility . . . . .	660
Specifying formatting options . . . . .	661
The JCL submission/EDIT dialog. . . . .	662
Source program mapping . . . . .	664
Preparing JCL to print reports or create XML documents . . . . .	664
The input measurement file . . . . .	666
The CAZLOG log file . . . . .	666
The report output file . . . . .	666
The PDF output file . . . . .	666
The XML document file . . . . .	666
Specifying control statements . . . . .	667
General syntax rules . . . . .	667
The PROFILE statement . . . . .	667
The MAP statement . . . . .	668
The SECTION statement. . . . .	669
The PRINT statement. . . . .	669
The CONVERT statement . . . . .	670
The DESC Statement . . . . .	671
Reports in PDF format . . . . .	671
Reports in XML document format . . . . .	671
Report SECTION descriptions . . . . .	671
SECTION statement parameter summary . . . . .	671
SECTION parameter descriptions. . . . .	681

**Chapter 13. Batch interface commands . . . . . 687**

Command syntax . . . . .	687
Example of NEW command . . . . .	687
Example of TNEW command . . . . .	688
Example of DELETE command . . . . .	688
Example of KEEP command . . . . .	688
Example of CANCEL command . . . . .	688
Command summary diagram . . . . .	688
Sample JCL . . . . .	690
Using the API to submit a command . . . . .	691
Environment . . . . .	691
Input registers . . . . .	692
Output registers . . . . .	692
Syntax. . . . .	692
Parameters . . . . .	692
Return codes . . . . .	693
Reason codes . . . . .	693
Abend code . . . . .	695

Command descriptions . . . . .	695
NEW . . . . .	695
TNEW. . . . .	707
DELETE . . . . .	707
KEEP . . . . .	708
CANCEL. . . . .	708
Batch import . . . . .	708

**Chapter 14. Realtime Monitor . . . . . 709**

Auto-refresh mode . . . . .	709
Monitor views . . . . .	709
ACCUM and CURRENT modes . . . . .	709
SETUP command . . . . .	709
View 1. Measurement overview . . . . .	710
Measurement progress . . . . .	710
System resource usage . . . . .	711
DB2 activity . . . . .	711
CICS transactions . . . . .	712
View 2. CPU utilization . . . . .	712
CPU activity. . . . .	713
CPU usage distribution . . . . .	714
CPU modes . . . . .	715
View 3. Measurement environment . . . . .	718
Request parameters . . . . .	718
Measurement environment . . . . .	719
View 4. CPU active modules . . . . .	720
Overall CPU activity . . . . .	720
Current . . . . .	720
Module attribution . . . . .	721
View 5. Data mgmt service time . . . . .	721

**Chapter 15. Application Performance Analyzer Graphical User Interface (GUI). . . . . 723**

Getting started with the Application Performance Analyzer GUI . . . . .	723
System requirements . . . . .	724
Communications . . . . .	724
New Connection Dialog. . . . .	725
Preferences . . . . .	726
General preferences . . . . .	726
Email preferences . . . . .	727
Address book preferences . . . . .	729
Environment preferences . . . . .	729
Logging/debug preferences . . . . .	731
Report download options preferences . . . . .	732
Source program mapping preferences . . . . .	733
Status line . . . . .	734
List navigation . . . . .	735
Expand all . . . . .	735
Collapse all . . . . .	735
Home . . . . .	735
Backward . . . . .	735
Forward . . . . .	735
View navigation . . . . .	736
STC list view . . . . .	736
Context menu . . . . .	737
STC Properties view . . . . .	742
System Properties view . . . . .	742
Observations List view . . . . .	743

Toolbar . . . . .	744
Refresh observations . . . . .	744
Filter observations . . . . .	744
Search observations . . . . .	745
New observation . . . . .	746
New threshold observation . . . . .	762
Import Observation . . . . .	764
Context menu . . . . .	766
Observation Detail view . . . . .	773
Observation Reports List view . . . . .	774
Toolbar . . . . .	776
Context menu . . . . .	776
Report views . . . . .	780
Accelerator keys . . . . .	782
Toolbar . . . . .	782
Download report . . . . .	783
Edit report options . . . . .	783
Email report . . . . .	784
Sticky Notes . . . . .	785
Launch Html . . . . .	786
Print . . . . .	786
Save As . . . . .	786
Find . . . . .	788
Copy . . . . .	789
Close report . . . . .	790
Close all reports . . . . .	790
Context menu . . . . .	790
Search Results view . . . . .	796
Help Search view . . . . .	797
Configuring and Tuning . . . . .	798
Memory Settings . . . . .	798

## Appendix A. Support resources and problem solving information . . . . . 799

Searching knowledge bases . . . . .	799
Searching the information center . . . . .	799
Searching product support documents . . . . .	799
Getting fixes . . . . .	801
Subscribing to support updates . . . . .	801
RSS feeds and social media subscriptions . . . . .	801
My Notifications . . . . .	802
Contacting IBM Support . . . . .	802
Define the problem and determine the severity of the problem . . . . .	803
Gather diagnostic information . . . . .	804
Submit the problem to IBM Support . . . . .	804

## Appendix B. Creating side files using CAZLANGX . . . . . 807

CAZLANGX parameters . . . . .	809
Parameters . . . . .	810
Side file compatibility with Debug Tool for z/OS . . . . .	810
Including a CAZLANGX step in your SCLM translator . . . . .	810
High Level Assembler SCLM example . . . . .	810
COBOL SCLM example . . . . .	811
COBOL Report Writer Precompiler . . . . .	812
Required compiler options for creating listings or CAZLANGX side files . . . . .	812
TEST option considerations . . . . .	814

Naming compiler listings or side files . . . . .	814
Naming CSECTs for Application Performance Analyzer . . . . .	814
Compiler listings and side file attributes . . . . .	815

## Appendix C. XML document layout 817

XML declaration . . . . .	817
Root tag . . . . .	817
Layout standards . . . . .	817
Measurement information . . . . .	817
Performance analysis reports . . . . .	819
S01 Measurement Profile . . . . .	819
S02 Load Module Attributes . . . . .	824
S03 Load Module Summary . . . . .	825
S04 TCB Summary . . . . .	826
S05 Memory Usage Timeline . . . . .	826
S06 Data Space Usage Timeline . . . . .	826
S07 TCB Execution Summary . . . . .	827
S08 Processor Utilization Summary . . . . .	827
S09 Measurement Analysis . . . . .	827
S10 Observation Session Messages . . . . .	828
C01 CPU Usage by Category . . . . .	828
C02 CPU Usage by Module . . . . .	830
C03 CPU Usage by Code Slice . . . . .	831
C04 CPU Usage Timeline . . . . .	831
C05 CPU Usage by Task/Category . . . . .	832
C06 CPU Usage by Task/Module . . . . .	834
C07 CPU Usage by Procedure . . . . .	835
C08 CPU Usage Referred Attribution . . . . .	835
C09 CPU Usage by PSW/Object Code . . . . .	836
C10 CPU Usage by Natural Program . . . . .	837
W01 WAIT Time by Task/Category . . . . .	837
W02 WAIT Time by Task/Module . . . . .	839
W03 WAIT Referred Attribution by Task . . . . .	840
W04 WAIT Time by Task ENQ/RESERVE . . . . .	841
W05 WAIT Time by Tape DDNAME . . . . .	842
D01 DASD Usage Time by Device . . . . .	842
D02 DASD Usage Time by DDNAME . . . . .	842
D03 DASD Usage Time by Dataset . . . . .	843
D04 Dataset Attributes . . . . .	843
D05 DASD EXCP Summary . . . . .	847
D06 DASD VSAM Statistics . . . . .	847
D07 DASD Activity Timeline . . . . .	847
D08 DASD I/O Wait Time . . . . .	848
D09 VSAM Buffer Pool Usage . . . . .	849
G01 Coupling Facility Statistics . . . . .	849
G02 Coupling Facility Mean Service Times . . . . .	850
G03 Coupling Facility Total Service Times . . . . .	850
K01 CPU SRB Usage by SRB Type . . . . .	851
K02 CPU SRB Usage by PSW/OBbjCode . . . . .	851
V01 Measurement Variance Summary . . . . .	852
V02 CICS Variance Summary . . . . .	853
V03 DB2 Variance Summary . . . . .	855
V04 IMS Variance Summary . . . . .	857
CICS Performance analysis reports . . . . .	861
E01 CICS Session Statistics . . . . .	861
E02 CICS CPU and Use Counts by Pgm . . . . .	862
E03 CICS CPU Usage by Transaction . . . . .	862
E04 CICS Mean Service Time by Txn . . . . .	864
E05 CICS Total Service Time by Txn . . . . .	865
E06 CICS Total Service Time by Task ID . . . . .	867

E07 CICS Wait by Txn . . . . .	870	H04 HFS File Attributes . . . . .	916
E08 CICS Mean Service Time by Termid . . . . .	870	H05 HFS Device Activity . . . . .	917
E09 CICS Total Service Time by Termid. . . . .	872	H06 HFS Device Attributes . . . . .	917
E10 CICS Mean Service Time by User ID . . . . .	874	H07 HFS Activity Timeline . . . . .	918
E11 CICS Total Service Time by User ID . . . . .	877	H08 HFS Wait Time by Path Name . . . . .	918
E12 CICS CPU/Service Time by Transaction . . . . .	879	H09 HFS Wait Time by Device . . . . .	919
IMS Performance analysis reports . . . . .	879	H10 HFS Service Time by Request . . . . .	919
I01 IMS Measurement Profile . . . . .	879	H11 HFS Wait Time by Request . . . . .	920
I02 IMS DL/I Call Timeline . . . . .	882	MQSeries Performance analysis reports. . . . .	920
I03 IMS Transaction Timeline . . . . .	882	Q01 MQSeries Activity Summary. . . . .	920
I04 IMS Transaction Activity Timeline . . . . .	883	Q02 MQSeries CPU Usage by Queue . . . . .	921
I05 to I13 . . . . .	883	Q03 MQSeries CPU Usage by Request . . . . .	921
I14 IMS PSB/PCB Attributes . . . . .	885	Q04 MQSeries CPU Usage by Txn/Queue. . . . .	921
I15 IMS DL/I Call Attributes . . . . .	886	Q05 MQSeries Service Time by Queue . . . . .	922
I16 IMS Transaction Service Times . . . . .	886	Q06 MQSeries Service Time by Request . . . . .	922
I17 IMS Transaction DL/I Call Counts . . . . .	887	Q07 MQSeries Service Time by Txn/Queue . . . . .	923
I18 IMS CPU/Service Time by DL/I Call . . . . .	887	Q08 MQSeries Wait Time by Queue . . . . .	924
I19 IMS CPU/Service Time by PSB . . . . .	888	Q09 MQSeries Wait Time by Request . . . . .	924
I20 IMS CPU/Service Time by Transaction . . . . .	888	Q10 MQSeries Wait Time by Txn/Queue . . . . .	924
I21 IMS CPU/Service Time by PCB . . . . .	888	Q11 MQ+ Activity Timeline . . . . .	925
I22 IMS Region Transaction Summary . . . . .	889	Q12 MQ+ CPU/SVC Time by Queue . . . . .	925
DB2 Performance analysis reports . . . . .	889	Q13 MQ+ CPU/SVC Time by Request . . . . .	926
F01 DB2 Measurement profile . . . . .	889	Q14 MQ+ CPU/SVC Time by Txn . . . . .	927
F02 DB2 SQL Activity Timeline . . . . .	891	WebSphere performance analysis reports . . . . .	928
F03 SQL Activity by DBRM. . . . .	892	B01 WAS Summary . . . . .	928
F04 SQL Activity by Statement . . . . .	893	B02 WAS Activity . . . . .	929
F05 SQL Activity by Plan . . . . .	893	B03 WAS Activity by Origin . . . . .	929
F06 DB2 SQL Statement Attributes . . . . .	894	B04 WAS Activity by Servant . . . . .	930
F07 SQL WAIT Time by DBRM . . . . .	895	B05 WAS EJB Activity . . . . .	930
F08 SQL WAIT Time by Statement . . . . .	895	B06 WAS EJB Activity by Origin . . . . .	931
F09 SQL WAIT Time by Plan . . . . .	896	B07 WAS EJB Activity by Servant. . . . .	931
F10 SQL CPU/Service Time by DBRM . . . . .	896	B08 WAS Servlet/JSP Activity . . . . .	931
F11 SQL CPU/Service Time by Statement . . . . .	897	B09 WAS Servlet/JSP Activity by Origin . . . . .	932
F12 SQL CPU/Service Time by Plan. . . . .	898	B10 WAS Servlet/JSP by Activity by Servant . . . . .	932
F13 DB2 Threads Analysis . . . . .	899	B11 WAS/CICS Calls . . . . .	932
F14 DB2 CPU by Plan/Stored Proc . . . . .	900	B12 WAS/DB2 Calls . . . . .	933
F15 DB2 SQL CPU/Svc Time by Rq Loc . . . . .	901	B13 Async Work Requests . . . . .	934
F16 DB2 SQL CPU/Svc Time by Enclave . . . . .	902	B14 Async Work by Manager . . . . .	934
F17 DB2 SQL CPU/Svc Time by Corrid . . . . .	903	B15 Async Work by Servant . . . . .	934
F18 DB2 SQL CPU/Svc Time by Wkstn . . . . .	904	B16 WOLA Inbound Requests . . . . .	935
F19 DB2 SQL CPU/Svc Time by EndUsr . . . . .	905	B17 WOLA Inbound by Origin . . . . .	935
F20 DB2 Class 3 Wait Times . . . . .	906	B18 WOLA Inbound by Servant . . . . .	935
Java/USS/HFS Performance analysis reports . . . . .	907	B19 WOLA Outbound Requests . . . . .	936
J01 Java Summary/Attributes . . . . .	907	B20 WOLA Outbound by Register . . . . .	936
J02 Java Heap Usage Timeline . . . . .	908	B21 WOLA Outbound by Servant . . . . .	936
J03 Java CPU Usage by Thread . . . . .	908	Multiple address space reports . . . . .	937
J04 Java CPU Usage by Package . . . . .	908	X01 CICS Mean Service Time by Txn . . . . .	937
J05 Java CPU Usage by Class . . . . .	909	X02 CICS Total Service Time by Txn. . . . .	939
J06 Java CPU Usage by Method . . . . .	910	X03 CICS Mean Service Time by Term . . . . .	941
J07 Java CPU Usage by Call Path. . . . .	910	X04 CICS Total Service Time by Term . . . . .	943
J09 Java Service Time by Package. . . . .	911	X05 Combined DB2 IMS MQ Timeline . . . . .	946
J10 Java Service Time by Class. . . . .	911	Source Program Attribution . . . . .	947
J11 Java Service Time by Method . . . . .	912	P01 Source Program Attribution . . . . .	947
J12 Java Service Time by Call Path . . . . .	912		
J14 Java Wait Time by Package . . . . .	913		
J15 Java Wait Time by Class . . . . .	913		
J16 Java Wait Time by Method. . . . .	914		
J17 Java Wait Time by Call Path . . . . .	914		
H01 HFS Service Time by Path Name . . . . .	915		
H02 HFS Service Time by Device. . . . .	915		
H03 HFS File Activity . . . . .	915		
		<b>Appendix D. Accessibility . . . . .</b>	<b>949</b>
		Using assistive technologies . . . . .	949
		Keyboard navigation of the user interface . . . . .	949
		Accessibility of this document . . . . .	949

<b>Appendix E. Notices . . . . .</b>	<b>951</b>
<b>Trademarks . . . . .</b>	<b>953</b>
<b>Bibliography. . . . .</b>	<b>955</b>
<b>Glossary . . . . .</b>	<b>957</b>
<b>Index . . . . .</b>	<b>959</b>





---

## Tables

1. Color coding of graphs . . . . .	50	13. General preferences and descriptions	726
2. Report categories and prefixes . . . . .	51	14. Email preferences and descriptions . . . . .	728
3. on objects . . . . .	172	15. Environment preferences and descriptions	730
4. on headings . . . . .	173	16. Logging/debug preferences and descriptions	731
5. on objects . . . . .	176	17. Report download options preferences and descriptions . . . . .	733
6. on headings . . . . .	176	18. Source program mapping preferences and descriptions . . . . .	734
7. Detail Line Descriptions . . . . .	654	19. Accelerator key combinations . . . . .	782
8. Mapped Program Header Information	655	20. Report sort actions . . . . .	792
9. DWARF Source Detail Line Descriptions	656	21. S10 Observation Session Messages . . . . .	828
10. DWARF Source Header Information . . . . .	657	22. XML Elements for X04 Report Field Titles	943
11. Reason codes . . . . .	693		
12. Abend code . . . . .	695		



---

## About this document

This document describes IBM® Application Performance Analyzer for z/OS®, Version 13 Release 1 .

For the latest Application Performance Analyzer PTF information, see <http://www.ibm.com/software/awdtools/apa/support/>.

Appendix A contains information about IBM Web sites that can help you answer questions and solve problems.

IBM Application Performance Analyzer for z/OS (also referred to as Application Performance Analyzer) is a tool you can use to analyze the performance of user applications throughout the design, development, and maintenance cycle.

If you need to install Application Performance Analyzer, refer to the Application Performance Analyzer *Program Directory* for installation instructions.

---

## Documentation conventions

The following table describes typographical conventions used throughout this document:

Convention	Explanation
<b>boldface</b>	Indicates a command or keyword that you should type exactly as shown.
<i>italics</i>	Indicates a variable for which you should substitute an appropriate value.
monotype	Indicates literal input and output.
Ctrl + D	Indicates two or more keys pressed simultaneously.
[ ]	Brackets surround an optional value.
	Vertical bars separate alternative values from which you must make a selection.
...	Ellipsis indicates that the preceding element can be repeated.



---

# Changes introduced with IBM Application Performance Analyzer V13.1

---

## Changes introduced with IBM Application Performance Analyser V13.1

Enhancements to started tasks, sampling, exits, and intercepts include:

- Recognize LE mode switch for CPU attribution.
- SMS classes for Application Performance Analyzer created files.
- Repeat observations of batch jobs, without a time interval.
- WebSphere® measurements automatically measure servant regions and report Java™ and DB2® activity.
- Preloaded JVMTI agent.
- CICS+ recognizes CICS® filtering criteria.
- IEFU84 SMF exit program supports DB2 V10 compressed records.
- Support the DB2 v10 bind option for DB2 Explain.
- Clear Application Performance Analyzer exits when started task ends.
- Dynamic change of selected CONFIG settings.
- Export file name configuration setting.
- Export and Import a hierarchy of sample files.
- Import operation checks for duplicate sample file names.
- Compatibility support:
  - COBOL v5
  - CICS/TS v5.1
  - Adabas v8.2.4

Enhancements to Reporting include:

- Observation List displays setup filters.
- Observation List allows sort by owner.
- Observation List displays status of 'ErrMsg' when a non-critical error occurs during sampling.
- JobId added to observation details pop-up.
- Display separate counts for general and special processors in Measurement Profile report.
- Optionally attribute CPU usage to system modules in CPU Referred Attribution report.
- Report statistics for multi-volume datasets in DASD I/O Analysis reports.
- Identify CICS remote files in the DASD EXCP Summary report.
- New WebSphere report displays CICS distributed program link calls initiated from the servant regions.
- Create XML report files as variable block by default.
- Support SYSDEBUG source files created by Enterprise PL/I for z/OS v4.

Enhancements to Listener and Plug-in include:

- Listener operates as a UNIX process extension to the PD Tools Common Component, and is referred to as the Application Performance Analyzer PDTCC extension.
- Plug-in based on Eclipse 4.2 operates within PD Tools Studio.
- Preference option to launch sticky notes using double-click action.
- Replace the report options view with a dialog.
- Add report options and report download to individual reports toolbar.
- Display procedure names in CPU Usage by Procedure report.
- Allow the user to select the location of the local reports repository.
- Allow access to local reports for inactive started tasks.
- Support connection to Application Performance Analyzer instances operating on different z/OS systems.

---

## Chapter 1. Using Application Performance Analyzer/ISPF

Application Performance Analyzer/ISPF is the main interface to Application Performance Analyzer. It is used for submitting new observation requests, and for navigating the Performance Analysis Reports generated from observation requests. This chapter describes the Application Performance Analyzer/ISPF environment in general, how to submit observation requests, and how to navigate the reports.

Almost all panels in Application Performance Analyzer/ISPF are implemented as interactive reports. The first screen displayed when entering Application Performance Analyzer, "Observation Session List" follows the same rules and conventions as the Performance Analysis Reports.

For information about ...	See ...
Commands used to navigate ISPF reports.	"ISPF reports: navigation and control"
Application Performance Analyzer's main entry panel: the observation session list.	"R02 - Observation session list" on page 8
Accessing and using the performance reports menu.	"R01 - Application Performance Analyzer performance reports menu" on page 13

---

### ISPF reports: navigation and control

You navigate and control Application Performance Analyzer/ISPF reports using two types of commands:

- Primary commands - commands that you type on the command line
- Line commands - commands that you type directly in input fields in the body of the report

#### Scrolling

The vertical and horizontal scrolling commands you are familiar with from using most ISPF applications are applicable when viewing Application Performance Analyzer reports. Use UP and DOWN (PF7 and PF8) to scroll towards the top and the bottom of the report. You can scroll Maximum, Half, a specific number of lines and by cursor position.

Similarly, use LEFT and RIGHT (PF10 and PF11) to scroll the report horizontally.

#### Report headings

Many reports present information in a tabular format in rows and columns. The table begins with one or more heading lines, which contain title fields for each of the columns. These heading lines will "lock" to the top of the report viewing area and the vertical scrolling commands will affect only the data lines.

#### Action (menu) bar

Report navigation primary commands can be displayed by selecting "Navigate" on the action bar menu or can be typed directly on the command line. The action bar menu can be removed from the display by entering the PREF command, and de-selecting the "Action Bar Visible" option.

## Retaining open reports

Once you have opened and viewed reports, they can be retained for later viewing. Application Performance Analyzer provides this feature so that multiple reports (from multiple observation requests, if desired) can be readily available for viewing without re-generating the reports. You can navigate through all the open reports using the WIN and JUMP (PF4) commands. Reports are retained when you exit them using the CANCEL (PF12) command.

## Displaying HELP

For information about the report currently being displayed, position the cursor in the body of the report (not on an input field), and press PF1. Pressing PF1 on an input field will display specific information about that field.

## Primary commands for report navigation

The following is a list of the commands used to navigate reports and explanations for using them:

**WIN** You can use the WIN (WINDOW) command to display a selection list of open reports in a pop-up panel. From that panel, you can make a selection to jump to the selected report. The main Observation Session List panel will be the report listed at the top of the selection list, so you can use WIN to quickly get back to this panel rather than navigating through all your open reports.

### **JUMP (PF4)**

You can use the JUMP command, or the PF4 key, to jump to another open report. Each time you issue a JUMP request, Application Performance Analyzer will skip to the next open report, on a rotating basis.

### **END (PF3)**

Use the END command, or the PF3 key, to return to the display of the previous report — the one from which the current report was launched. The END command will close (delete) the current report. Entering END from the Report Selection Menu will exit the Application Performance Analyzer Performance Reporting Facility.

### **CANCEL (PF12)**

Use the CANCEL command, or the PF12 key, to return to the display of the previous report — the one from which the current report was launched. The CANCEL command will leave the current report open. You can return to it any time using the JUMP or WIN command. Entering CANCEL from the Report Selection Menu will exit the Application Performance Analyzer Performance Reporting Facility.

### **REPORT CODE**

Once you have selected an observation session, you can enter a three character report code, even if you are not in the report menu. You can be viewing one report, and can immediately open an additional report by typing its code.

### **UP (PF7)**

Use the UP command, or press PF7, to scroll vertically towards the top of the report.



**DOWN (PF8)**

Use the DOWN command, or press PF8, to scroll vertically towards the bottom of the report.

**LEFT (PF10)**

Use the LEFT command, or press PF10, to scroll the report horizontally to the left.

**RIGHT (PF11)**

Use the RIGHT command, or press PF11, to scroll the report horizontally to the right.

**FIND** The FIND command (abbreviation "F" can be used) finds all occurrences of a text string. It is similar to an ISPF FIND command, but does not have all the features. All occurrences of the target text string will be highlighted. To remove the highlights, enter the RESET command.

**RESET**

The RESET command removes the highlights set by the FIND command.

**PREF** Use this to set preferences for General Display Settings. Put a slash "/" beside an option to select it. The available options are:

1. Action bar visible on panels
2. Use 3270 graphic characters
3. Show command line in pop-up panels
4. Show long descriptions on multiple lines
5. Suppress use of special +/- character

**CONNECT**

Only available on the R02 Observation Session List screen. If your installation has multiple Application Performance Analyzer instances running, you can change which one your ISPF session is connected to by typing CONNECT followed by the Application Performance Analyzer identifier. You can use the VER command to view which Application Performance Analyzer instances are currently running on the same z/OS image that you are logged in to.

**VERSION**

Only available on the R02 Observation Session List screen. Type VERSION or VER and a list of the Application Performance Analyzer started tasks are displayed, along with their version numbers, and when they were started.

You can enter SELECT on the command line of the Started Tasks List panel to connect to a different Application Performance Analyzer started task. The format is 'SELECT stcid', where stcid is the value from the 'Stc Id' column of the started task you want to connect to. When a valid, active started task is selected, the R02 Observation Session List automatically connects to the specified started task when you exit the VERSION dialog. "S" and "SEL" are aliases of SELECT.

**SELECT**

Available on the R02 Observation Session List screen. This command starts Performance Analysis Reporting for the selected request number. Specify a request number of a valid request after the command, such as SELECT 1234. The selected request number must contain an observation file. "S" and "SEL" are aliases of SELECT.

**SETUP**

Use the SETUP command to filter information and select options for

reports. This command is useful for reducing the size of reports by removing information that is not critical. The options available using the SETUP command vary by report. You can get more details from the report descriptions.

**HIDE** Only available on the R02 Observation Session List screen. Type HIDE to remove the list of commonly used Application Performance Analyzer primary commands from view.

**SHOW** Only available on the R02 Observation Session List screen. Type SHOW to redisplay the list of commonly used Application Performance Analyzer primary commands at the top of the screen.

**IMPORT** Only available in the R02 Observation Session List screen. Use the IMPORT command to load a sample file, or an exported hierarchy of observations. This can be a native Application Performance Analyzer sample file, or one that has been previously exported using the EXP or EXPH command and is in TSO XMIT format. The IMPORT command displays a pop-up window to enter the fully qualified data set name of the native sample file or TSO XMIT file, and to indicate if that original file is to be deleted after import. A new request description can be optionally entered.

During IMPORT, Application Performance Analyzer creates a new observation, assigns a new request number, and, if provided on the IMPORT pop-up window, adds the description to the imported observation. If a hierarchy is being imported, new request numbers are provided for all observations in the hierarchy. If indicated, Application Performance Analyzer will delete the original files. The date and time of the imported request is set to the current date and time, and the expiry date is recalculated based on the rules of the importing system.

## Line commands for report navigation

You enter a line command directly in an input field in the body of a report. The line commands are usually typed directly over the text of the field, such as a column heading, or a data field in the report. Input fields where you can enter line commands are always underlined.

Many of Application Performance Analyzer's performance analysis reports contain input fields on which you can enter various line commands. Generally, you can enter line commands on quantified detail lines on the field under the "Name" heading.

The allowable line commands vary depending on the type of detail line. But, in all cases by entering "/" you can request the display of a Context Menu, which will present a list of the allowable line commands for that input field. The generally available line commands are summarized here, followed by details about each command.

- / Display context menu
- ? Display context help information
- + Expand
- ++ Show additional details (or just press the Enter key as a shortcut)
- – Collapse
- SV Sort by value
- SN Sort by name

### "/" Context menu

Enter a slash "/" to display a context menu in a pop-up panel. The context menu lists the line commands that are available for that field. In addition, you are able to select the line command function directly from the context menu.

A sample context menu is shown below:

Enter S to select a function from this menu. The line command (Yellow) can also be entered on the main panel.

<u>Sel</u>	<u>To Perform the Following</u>	<u>LineCmd</u>
_	display context help information	?
_	show additional details about this line	++
_	expand to reveal next level entries	+
_	collapse to hide next level entries	-
_	sort next level entries by value	SV
_	sort next level entries by name	SN

### "?" HELP

For context help information about the field, or report line, enter a question mark "?". Alternatively, you can press the PF1 key with the cursor positioned on the input field.

### "+" Expand

Enter a plus sign "+" on a report detail line to expand the report to reveal additional detail lines which are at the next hierarchical level under the selected line. This offers a means of breaking down one quantified item into greater detail.

For example, consider the following line item which quantifies CPU time in System/OS Services:

<u>SYSTEM</u>	System/OS Services	44.30	=====
---------------	--------------------	-------	-------

Type a plus sign in the name field – SYSTEM:

<u>±SYSTEM</u>	System/OS Services	44.30	=====
----------------	--------------------	-------	-------

Press the ENTER key and the item will be expanded as illustrated here:

<u>SYSTEM</u>	System/OS Services	44.30	=====
→ <u>SVC</u>	SVC Routines	42.14	=====
→ <u>MVS</u>	MVS System	2.06	==
→ <u>NUCLEUS</u>	Nucleus Modules	0.06	
→ <u>IMS</u>	IMS Subsystem	0.03	

The plus sign (+) entered on the Name heading field will fully expand the entire report to show the full hierarchy of detail.

The plus sign (+) entered on the Description heading will expand the width of the description field. The plus sign (+) entered on the heading for the scale (histogram) will 'zoom in' the scale.

You can also use this line command in the "+n" format, where "n" is the number of levels to expand. On the Description heading, this allows you to expand the width of the description field by a specific number of characters, for example "+12" will widen the field by 12 characters.

### "++" Additional details

Enter "++" on a report detail line to display detailed information about the

selected item. A pop-up panel will appear in which this information is displayed. The nature of the information displayed in these pop-up panels varies widely depending on the type of item selected.

**Note:** As a shortcut, you can also simply press the Enter key on an item, it will be treated as if you had entered “++”.

As an example, consider the I/O Analysis by DDNAME report:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0723/TSTJOB01)          Row 00001 of 00003
Command ==> _____ Scroll ==> CSR

DDName>Cyl   Volume>Unit   Percent of Time * 10.00% ±1.6%
              *...1...2...3...4...5...6...7...8..
VSAM1-02     BKNSM2          31.16 =====
OUTFILE      BKNSM2          1.16 ==
INFILE       BKNSM1          0.05
  
```


Additional detail about the DDNAME VASM1-02, for example, can be displayed by typing ++ (or just pressing Enter) in that field:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0723/TSTJOB01)          Row 00001 of 00003
Command ==> _____ Scroll ==> CSR

DDName>Cyl   Volume>Unit   Percent of Time * 10.00% ±1.6%
              *...1...2...3...4...5...6...7...8..
++AM1-02     BKNSM2          31.16 =====
OUTFILE      BKNSM2          1.16 ==
INFILE       BKNSM1          0.05
  
```

A pop-up panel with detailed information will appear. (This pop-up panel is scrollable, more information is available by scrolling down with PF8):

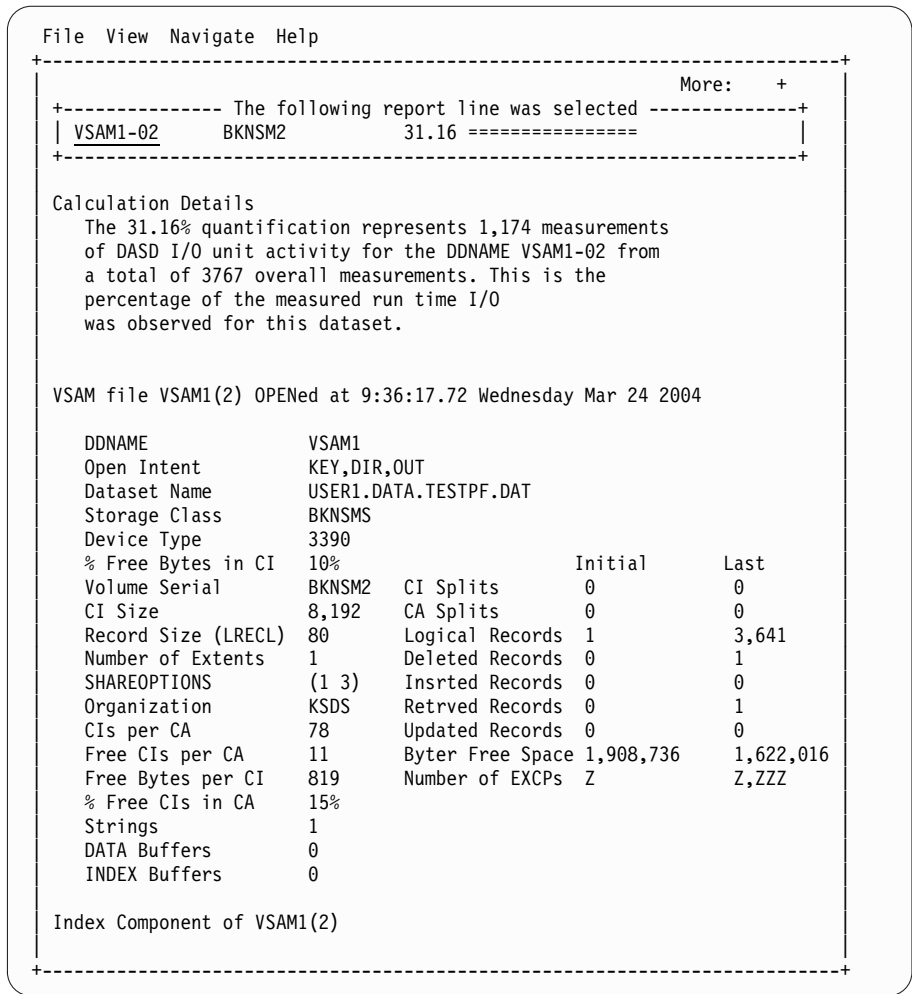

**“-” Collapse**

Enter a minus sign “-” on a report detail line to collapse (hide) all items under the selected line which are at the next hierarchical level of detail.

The minus sign entered on the Name heading field will collapse the entire report so that only items in the first level of the hierarchy are visible.

The minus sign entered on the Description heading will reduce the width of the description field.

The minus sign entered on the heading for the scale (histogram) will “zoom out” the scale.

**“SV” Sort by Value**

Enter “SV” to sort detail lines by value. When this is entered on a detail line, detail lines under the selected line – at the next hierarchical level – will be sorted by value. Entering the “SV” command repeatedly will toggle between sorting in descending and ascending values.

Enter “SV” on the 'Name' heading field to sort the first level items by value.

**“SN” Sort by Name**

Enter “SN” to sort detail lines by name. When this is entered on a detail line, detail lines under the selected line — at the next hierarchical level — will be sorted by name.

Entering the "SN" command repeatedly will toggle between sorting in descending and ascending names. Enter "SN" on the "Name" heading field to sort the first level items by name.

**Note:** The line commands listed above are not a comprehensive list of all that are available in the various reports. See the documentation for each report, or enter a "/" to get a context menu in any input field in any report.

## R02 - Observation session list

When you start Application Performance Analyzer/ISPF, the Observation Session List panel is displayed. A list of commonly used primary commands is displayed at the top of the screen to assist those users new to Application Performance Analyzer. Once you become familiar with the Observation Session List, these commands can be hidden from view by entering the HIDE primary command. They can be redisplayed by entering the SHOW primary command.

This panel displays a scrollable list of all the observation session requests, whether they are complete, active, or pending. The list is usually filtered by the owner ID, so each user would only see their own requests. The list can also be filtered by Job Name. The SETUP command is used to specify how the list is to be filtered. When filtering is used to limit the observations which are displayed, the filter will be displayed beneath the appropriate heading.

**Note:** Although it is not started from the Report Selection Menu, the Observation Session List panel is implemented as a report, and, therefore, follows the same conventions as the Performance Analysis Reports panels.

A sample Observation Session List panel is shown here:

```

File View Navigate Help
-----
R02: Observation Session List (CAZ0)                               Row 00078 of 00810
Command ==> _____ Scroll ==> CSR

NEW      To define a new measurement
TNEW     To define a threshold measurement
CONNECT  To connect to another instance of the measurement task
VERSION  To display version information for all instances
IMPORT   To IMPORT a previously Exported sample file or hierachy
HIDE     To remove these commands from the display (recommended)
/        On top of any ReqNum to get a list of the line commands

Reqnum  Owned By  Description          Job Name  Date/Time          Samples  Status
-----
1871    USER1          CICS22A   Jan-3  18:12           100    Ended
1870    USER1          CICS22A   Jan-3  18:11           100    Ended
1869    USER1          USER2     Jan-3  18:11          3,450  Cancel
1868    USER2          USER1     Jan-3  18:10          10,000  Ended
1867 +  USER1    repeat m-step a    CICS22A   Jan-3  18:07           100    STEPS
1866    USER1          USER1     Jan-3  18:08          10,000  Ended
1865 +  USER1    repeat m-step a    PFTEST11  Jan-3  17:55           100    STEPS
1864    USER1          USER1     Jan-3  17:56          10,000  Ended
1863 +  USER1    repeat m-step a    PFTEST11  Jan-3  17:54           100    STEPS
1862    USER1          USER1     Jan-3  17:54          10,000  Ended
1842    USER1          USER1     Jan-3  17:52          10,000  Ended
1803 +  USER1    repeat m-step a    PFTEST11  Jan-3  17:51           100    STEPS
1802    USER1    batch interface    USER1     Jan-3  17:46           5,000  Ended
1801    USER1          CICS22A   Jan-3  17:45           100    Cancel
1800    USER1    RT#2 (open/clos    PFTEST02  Jan-3  17:46          17,070  Cancel
1799    USER1          CICS22A   Jan-3  17:30           100    Ended
1798    USER1          CICS22A   Jan-3  17:30            1    Stoppp

```

This panel is used to initiate a new observation request, by using the “NEW” primary command, or the “NEW” line command (described in the next section). The “NEW” primary command and the “NEW” line command both cause the Schedule New Measurement panels to be displayed. For Threshold Monitor requests, use the “TNEW” primary command. For more information about Threshold Monitor requests, see “Using the TNEW command” on page 44.

This panel is also used to access the Reports menu, by entering the “R” line command on the request number for which you want to generate Performance Reports. The “NEW” and “R” commands are the most commonly used commands on this panel, and provide access to the primary functions of Application Performance Analyzer: submitting Observation Requests, and generating Performance Reports for a completed Observation Request.

## Input fields

The inputs fields on this report are the ReqNum title field, and all the request number detail lines under it. The request number detail line input is described below in the section “Description of detail lines.”

You can type the following line commands directly on to the ReqNum title field:

- “?” Display context help information
- “+” Expand to reveal next level entries for all observations
- “-” Collapse to hide next level entries for all observations
- “SR” Sort report detail lines by Request Number
- “SJ” Sort report detail lines by Job Name
- “SD” Sort report detail lines by date/time
- “SO” Sort report detail lines by Owned By
- “SW” Sort lines by expiry days warning (only when expiry days warning is enabled)
- “SK” Sort lines with no delete date (only when expiry days warning is enabled)

## Description of detail lines

Each detail line shows the following information about the observation session:

### Request Number

This is the unique four digit request number assigned to identify the observation session. This is also an input field which accepts line commands. Type the line command directly on top of the request number. If the request number has a “+” beside it, this indicates that there are subsequent entries underneath this one. The line commands accepted in the Request Number field are as follows:

- “/” Display context menu.
- “?” Display context help information.
- “++” Show additional details about this request in a pop-up window. As with all reports, you can also press the Enter key instead.
- “+” Expand to reveal next level entries. This is used for multi-step, repeat schedule, USS, threshold and collateral DB2 requests. When there is next level entries available, a “+” will appear beside the request number.
- “-” Collapse to hide next level entries.
- “D” Delete the request.

- "R"** Display performance analysis reports menu for this request, or start Realtime Monitor if request is currently active. When entered for parent observations of multi-step, repeat schedule, USS and threshold measurements, this will expand to reveal next level entries.
- "S"** Select Reports or Realtime Monitor. When entered for parent observations of multi-step, repeat schedule, USS and threshold measurements, this will expand to reveal next level entries.
- "T"** Tag up to 20 measurements at one time. Tagged measurements are used for variance reporting and CICS multiple address space reporting. For variance reporting, use the "T" line command together with the "V" line command, which you use to indicate the base measurement and launch variance reporting. For CICS multiple address space reporting, use the "T" line command together with the "R" line command, which you use to launch reporting for one of the CICS regions. In addition to the standard CICS reports, the specific CICS multiple address space reports are generated.
- Note:** Tagged measurements remain tagged only for the duration of the session.
- "TR"** Create a new request to be Triggered when this request starts. This can only be used on a request that is in SCHED status.
- "V"** Launch performance analysis reporting in a mode that enables access to variance reports. Use the "V" line command to compare a measurement previously tagged with a "T" line command. The measurement selected by the "V" line command is the base measurement in variance reports.
- Note:**  
The report menu will be displayed in response to the "V" line command.
- CAN** Cancel the request (request must be active).
- CRAG**  
Cancel the RUNAGAIN count, specified in the "Times to repeat measurement" field of R03 Panel 8 when the request was created. This prevents any further measurements from being initiated automatically when the job is rerun. The request must not be in active or writing status.
- KEEP** Keep this request until it is manually deleted. This overrides the auto delete feature.
- MOD** Modify the request.
- NEW** Create new observation request with the same attributes as this request.  
The NEW line command will display the Schedule New Measurement panel with the input fields pre-filled with entries from the request on which "NEW" was typed. If you want an empty Schedule New Measurement panel, use the "NEW" primary command.
- SUB** Create a new observation request with the same attributes as this request and submit it immediately. You use "SUB" instead of the "NEW" line command when you do not need to view or change any of the fields in the original request.
- EXP** Export the sample file for this request to a file in XMIT format.
- EXPH** Export the hierarchy of observations for this request, and all dependent requests under it, to a file in TSO XMIT format. All of the observations must have completed.



The request numbers can be displayed in different colors. Parent observations inherit the color of the most critical child. Expand the parent to see the color of the individual child observations. The colors that can be displayed are as follows:

**Turquoise**

The default color having no specific meaning

**White** Indicates this observation has been 'tagged'.

**Yellow**

When the expiry days warning feature is enabled, indicates this observation will be automatically deleted in two or more days. Use the SW line command on the ReqNum heading to sort these observations by delete date. Use the KEEP command to prevent this request from being automatically deleted. Users with administrator authority will see the yellow for all users' observations. All other users will see the yellow for their own observations only.

**Green** When the expiry days warning feature is enabled, indicates this observation has no delete date or is marked 'Do not Delete'. Use the SK line command on the ReqNum heading to sort all these similar observations to the top of the list. Users with administrator authority will see the green for all users' observations. All other users will see the green for their own observations only.

**Red** When the expiry days warning feature is enabled, indicates this observation will be automatically deleted within 24 hours. Use the SW line command on the ReqNum heading to sort these observations to the top of the list. Use the KEEP command to prevent this request from being automatically deleted. Users with administrator authority will see the red for all users' observations. All other users will see the red for their own observations only.

**Owned By**

This is the User ID of the "owner" of the request (the TSO ID of the user who created the request).

**Description**

This is the descriptive name of the observation session that was entered (optionally) when the request was made.

**Job Name**

This is the name of the job (or Started Task or TSO ID) that was measured.

**Date/Time**

This indicates the date and time of the completion of the measurement. If the measurement is not yet complete, the date and time when the request was made is shown.

**Samples**

If the session has a status of Ended or Active this is the number of observation samples done. If the observation session has not yet started (a status of "Sched" or "Future") then this shows the number of observation samples requested. This field changes color depending on the status.

**Status**

This shows the status of the observation session:

- **Active** means the session is currently taking place.

- **Cancel** means the request was cancelled using the “CAN” line command.
- **Ended** means the session has completed.
- **ErrMsg** means the session was completed, but error messages are written during sampling. The sample file might be incomplete. Report S10 displays the error messages that are written during sampling.
- **Failed** means the request failed to complete normally, and did not create a valid sample file.
- **REPEAT** means that this is a repeating schedule request. The requests under this entry can be displayed by using the “+” line command to expand to the next level.
- **Sched** means the session has been scheduled but measurement has not yet been started.
- **STEPS** means that this is a multi-step request. The requests under this entry can be displayed by using the “+” line command to expand to the next level.
- **Stoppd** means the request was stopped for some reason, usually a CPU Usage control issue, look at report S01 and check for the CPU Usage Status field. It will be present if the request was stopped due to CPU Usage controls. You can also use the “++” (or Enter key) line command directly on the request number field, and a reason will be shown in the detail window.
- **Tagged** means that this measurement has been tagged (with the “T” line command) for use in variance reports or CICS multiple address space reports.
- **Thresh** means that this is a Threshold Monitor request. The request under this entry can be displayed by using the “+” line command to expand to the next level.
- **Trig** means this request will be triggered when the corresponding scheduled request starts.
- **USS** means that this is a USS environment measurement. A separate measurement file is created for each spawned address space. Enter the “+” line command to expand this item to see each completed measurement.
- **Multjb** means that this is a multiple job request, created by entering a jobname with wildcards specified. The measurements under this entry can be displayed by using the “+” line command to expand to the next level.
- **IMS™** means that this is an IMS Multiple Address Space (MASS) request. Enter the “+” line command to expand this item to view the individual IMS MPP region observations.

**Note:** A plus sign (+) that appears after the status means that this request will repeat if the target job runs again. This happens when the “Times to repeat measurement” field is specified, and the specified number of times has not been reached, or the optional specified time interval has not expired. Once the job has been rerun, or the optional time interval passes, the plus sign will disappear.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window is shown here:

```

File View Navigate Help
-----+-----
General
Request Number      1946
Request Description No Description entered
Request Status      Ended
Owner Id            USER1
Time of Request     Wednesday Jan 26 2005 11:01:57.13
Session Start Time Wednesday Jan 26 2005 11:01:57.29
Session End Time   Wednesday Jan 26 2005 11:02:57.50
Session Duration   1 minutes, 0.21 seconds
Session Delete Date Do not Delete

Measurement Criteria
Select by Job Name CICS22A
Select by Sys Name X235
Sample Interval    6000 microseconds
Duration           60 seconds

Measurement Information
Sample File DSN    0.USER1.R1946.CICS22A.SF
Samples Requested  10,000
Samples Done       10,000
ASID               005A

Data Extractors
CICS               Selected
IMS                Not Selected
IMS+               Not Selected
DB2                Selected
DB2+               Selected
MQSeries           Not Selected
-----+-----

```

## R01 - Application Performance Analyzer performance reports menu

This panel is displayed as a result of entering the “R” line command to a line in the Observation Session List panel. It enables you to display Performance Analysis Reports for the selection observation session.

There are two distinct areas on this screen. The first, at the top of the screen, shows you a list of report categories. One of these categories is always highlighted (selected). The area at the lower half of the panel lists the available reports belonging to the highlighted (selected) category.

You can change the report category and hence change the list of available reports, by selecting a category by entering “S” beside the category, or by simply entering the single character code on the command line. You can then select a report from the lower portion of the screen.

As a shortcut, you can select a report directly by entering its three-character code on the command line. Note that if you are selecting by report code, it is not necessary to select the category to which the report belongs first, you can enter any three-character report code regardless of which category is currently highlighted. As a shortcut, you can also enter a report code on the command line while viewing a report, and that report will be opened, so it is not necessary to return to the report menu.

The most recently selected category persists from one session to the next.

This example shows the screen with DB2 Measurement as the currently selected category, note that if reports do not apply to the selected measurement, they category will be displayed in red, and will not be selectable.

```

File View Navigate Help
-----
R01: Performance Reports (1910/TSTJOB01) Row 00001 of 00008
Command ==> _____ Scroll ==> CSR

Select a category from the list below to view the available reports
A Admin/Miscellaneous      I IMS Measurement        E CICS Measurement
S Statistics/Storage       F DB2 Measurement       Q MQ Measurement
C CPU Usage Analysis       D DASD I/O Analysis     G Coupling Facility
W CPU WAIT Analysis        V Variance Reports      X Multi Address Space
J Java Measurement         B WebSphere App Server  H HFS Analysis
K SRB Measurement

-----
Enter S to make a selection or enter the report code on the command line

  _ F01 DB2 Measurement Profile          _ F11 DB2 SQL CPU/Svc Time by Stmt
  _ F02 DB2 SQL Activity Timeline        _ F12 DB2 SQL CPU/Svc Time by Plan
  _ F03 DB2 SQL Activity by DBRM         _ F13 DB2 SQL Threads Analysis
  _ F04 DB2 SQL Activity by Statement    _ F14 DB2 CPU by Plan/Stored Proc
  _ F05 DB2 SQL Activity by Plan        _ F15 DB2 SQL CPU/Svc Time by Rq Loc
  _ F06 DB2 SQL Statement Attributes    _ F16 DB2 SQL CPU/Svc Time by Enclav
  _ F07 DB2 SQL Wait Time by DBRM       _ F17 DB2 SQL CPU/Svc Time by Corrid
  _ F08 DB2 SQL Wait Time by Statement  _ F18 DB2 SQL CPU/Svc Time by Wkstn
  _ F09 DB2 SQL Wait Time by Plan       _ F19 DB2 SQL CPU/Svc Time by EndUsr
  _ F10 DB2 SQL CPU/Svc Time by DBRM

```

The individual reports are described in the chapter Chapter 3, "Performance analysis reports," on page 47.

---

## Chapter 2. Entering observation requests

This section describes how to enter Observation Requests (measurements).

For information about ...	See ...
Initiating a new observation request	"Using the NEW command"
Entering job information	"Panel 1 – Job Information" on page 17
Specifying data extractors (CICS, DB2, IMS, MQSeries®, Java) or entering additional load libraries to search	"Panel 2 – Options" on page 22
Entering multi-step measurements	"Panel 3 – Multi-steps" on page 28
Selecting active jobs from a list	"Panel 4 – Active Jobs" on page 29
Specifying CICS or IMS transactions or DB2 stored procedures or user-defined functions	"Panel 5 – Subsystems" on page 31
Specifying Sysplex systems	"Panel 6 – Sysplex" on page 37
Entering a recurring future scheduled measurement	"Panel 7 – Schedule" on page 38
Additional options related to how the measurement is to be handled	"Panel 8 – Sched Options" on page 41

---

### Entering an observation request

#### Using the NEW command

New observation requests are initiated from the Application Performance Analyzer Observation Session List panel (this is the panel where Application Performance Analyzer starts). You can use either the "NEW" primary command by entering it on the command line, or use the "NEW" line command by entering it on the request number field of an existing request. The "NEW" primary command will display the Schedule New Measurement panels with blank input fields. The "NEW" line command will display the Schedule New Measurement panels with the input fields pre-filled based on the existing request on which you typed the "NEW" command.

A sample Observation Session List panel with the "NEW" line command entered on the third request in the list is shown below.

```

File View Navigate Help
-----
R02: Observation Session List (0)
Command ==>> _____ Scroll ==>> CSR

```

Reqnum	Owned By	Description	Job Name	Date/Time	Samples	Status
0200	USER1	CICS test 2	CICS22A	May-30 14:15	5,000	Ended
0199	USER1	VSAM TEST	PFTEST03	May-29 18:11	3,000	Ended
NEW8	USER1	VSAM TEST	PFTEST03	May-29 18:11	2,998	Ended
0197	USER1		PFTEST03	May-29 18:10	4,349	Ended
0196	USER1		PFTEST03	May-29 18:07	3,801	Ended
0195	USER1	Loop with open/c	PFTEST02	May-28 18:08	20,000	Ended
0194	USER1	Loop with open/c	PFTEST02	May-24 17:55	20,000	Ended
0193	USER1	Loop with open/c	PFTEST02	May-24 17:56	5,000	Ended
0192	USER1		USER1PF1	May-22 17:54	3,019	Ended
0191	USER1		USER1PF1	May-22 17:54	10,000	Ended
0190	USER1	Loop with open/c	PFTEST02	May-22 17:52	20,000	Ended
0189	USER1	Loop with open/c	PFTEST02	May-20 17:51	20,000	Ended
0188	USER1	Loop with open/c	PFTEST02	May-9 17:46	20,000	Ended
0187	USER1	PF05	CICS22A	May-6 17:45	10,000	Ended
0186	USER1		CICS22B	May-5 17:46	10,000	Ended
0183	USER1	1000/60	ARAOSHOW	Apr-30 17:30	1,000	Ended

## Using the MOD line command

If you need to modify a measurement request, you can use the “MOD” line command.

When issued on measurements that are pending, the “MOD” process uses the same panels as the “NEW” process, so all the information in this chapter applies to “MOD” and “NEW”. The “MOD” command can be used to modify future schedule requests, even if some of the generated future requests have run already.

When issued on measurements that are active or have completed, the “MOD” process allows you to change the **Description** field only.

## Schedule New Measurement panels

After you have entered the “NEW” line command or “NEW” primary command, the Schedule New Measurement panel group is displayed.

The screens in the Schedule New Measurement dialog are divided into two sections. The top section is fixed and lists the available input panels. The current panel is highlighted. Each panel name is preceded by a symbol indicating if data has been entered to the panel. The symbol appears in green (green light) if data has been entered and is error free. A yellow or red light appears if there are warnings or errors in the data. The lower section of the screen is the input panel. It begins with an identifying heading.

### Panel navigation

There are two methods you can use to JUMP from panel to panel:

- Type the panel number on the command line and press ENTER.
- Type a slash, immediately followed by the panel number in the first two positions of any input field.

These can be done in a single operation in combination with entry of input to the current panel. For example, you can enter input to Panel 1, place the cursor on the command line, type 2 and press ENTER. The entry to the Panel 1 input fields will

be accepted and Panel 2 will appear. The same applies in this example if you type /2 in one of the data input fields. You must, of course, enter this on a field to which you are not specifying other input.

In some cases, automatic panel navigation occurs, for example, entering a jobname pattern will automatically take you to panel 4 to select from a list of active jobs based on that pattern.

### **Submitting the request**

If you have entered enough data for a complete request to be submitted, “Input more data or ENTER to submit” will be displayed in the panel heading line. Pressing the ENTER key again will submit the request, unless you navigate to another panel to continue entering data.

There is a final confirmation prompt displayed before the request actually gets submitted. If you want to turn off this final confirmation prompt, use the SETUP command while you are in the R03 Schedule New Measurement dialog.

### **Primary commands**

#### **panel number**

Enter a single-digit panel number to jump to that panel.

#### **SUBMIT**

Use SUBMIT to submit the request immediately and return control to the R02 panel.

**JCL** Use JCL to display the JCL and control statements that could be used to request the equivalent measurement request as a batch job using CAZBATCH.

### **SETUP options**

Use the SETUP command to specify various options affecting this dialog:

#### **Prompt for confirmation before submitting ...**

By default, this option is selected. Indicate if the final confirmation prompt is to appear or is to be suppressed.

#### **Prompt for confirmation before returning ...**

By default, this option is selected. Normally a warning message will appear when the END command (or PF3) is issued after data has been input. This is to warn that the input data will be discarded. Unselect this option to suppress the warning.

#### **Translate CICS trancode ...**

By default, this option is selected. CICS transaction codes entered to Panel 5 will be translated to uppercase. Deselect this option to suppress this translation of lowercase characters.

#### **Suppress warning flags ...**

By default, this option is not selected. Select to suppress display of the yellow warning symbols that appear to the left of input fields indicating a warning condition.

## **Panel 1 – Job Information**

The R03 Schedule New Measurement dialog always starts with panel 1 (Job Information) selected, it is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00019
Command ==> _____ Scroll ==> CSR

1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
2. Options           4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 1. Job Information

Job Name/Pattern . . _____
                    (Inactive)

Step Specification
Step No. . . . . ____ Specify step number, program name,
Program Name . . . _____ step name or step name + Proc step
Step Name . . . . _____ name. Use panel 3 to specify more
ProcStepName . . . _____ than one step.

Description . . . . _____
Number of Samples . _____ Measure to step end . . . N
Duration (min:sec) . _____ Delay by (secs) . . . . . _____
Notify TSO User . . _____ Retain file for (days) . 20
USS observations . . . . _____ Max. 20

```

The panel shown above was invoked with a NEW primary command, so input fields are mostly blank.

## Panel 1 – input fields

### Job Name/Pattern

This field is mandatory. It cannot be blank. Specify the name of the job, started task, or TSO region to be measured.

### Searching for active jobs (\*)

You can specify a job name pattern; for example, a job name prefix followed by an asterisk (\*), a job name suffix preceded by an asterisk, or an asterisk by itself. The asterisk indicates that the region to be measured is currently active. A list of active jobs whose names match the wildcard pattern will be displayed in panel 4, where one or more can be selected for measurement.

### Creating multi-job measurements (%)

You can specify wildcards in order to generate measurements for multiple jobs in one request. To sample multiple jobs in one request, use a percent (%) as a wild card character anywhere in the job name. Multiple percent characters may be used in the job name, such as %A%B% to sample any jobs with A and B in the job name separated by 0 to many characters. Panel 4 can be used to display the currently active jobs that will be sampled.

A job name pattern is only permitted in NEW or MOD requests. It is not valid for Threshold or Trigger requests. You can not specify a jobname pattern of "%". If a pattern is present in the jobname, then the request will automatically be set to only select active jobs.

The multiple job feature only works with jobs that are active. It does not wait for jobs to start. You can schedule a multiple job request to start at a future date and time by using panel 7 Schedule, but only one future event is permitted. The jobs that are active at the scheduled date and time (and matching the wildcard criteria) will be measured.



The maximum number of jobs that can be measured from a multi-job request is defined during the installation of Application Performance Analyzer. When this limit is exceeded, Application Performance Analyzer stops creating measurements for this request and the status of the request is displayed as 'Stoppd'. The measurements that executed (within the limit) are accessible for report viewing under the request. To increase the limit, contact your system programmer.

#### **Obtaining DB2 DDF Data**

To obtain DDF data, you must measure the DB2 DDF address space with the DB2+ extractor turned on. The DDF address space is typically named *xxxxDIST*, where *xxxx* is the DB2 subsystem name, unless your organization has changed the name. You have the option of limiting the scope of a DDF measurement by specifying filtering criteria in Panel 5 Subsystems. DDF measurements may be filtered by Correlation Id, End User Id, and/or Workstation Id. For more information on measuring DDF activity, refer to "Measuring DDF activity" on page 344.

#### **Measuring a specific DB2 stored procedure or user-defined function (-)**

To measure a specific DB2 stored procedure or user-defined function, use a dash (-) as the first and only character in the Jobname/Pattern field. The information identifying the DB2 stored procedure or user-defined function must be entered on Panel 5. Subsystems. This feature is only available when the WLM Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary. When measuring a specific DB2 stored procedure or user-defined function, the following measurement options are not applicable and will result in an error if used: Step specification/Multi Steps, Measure to step end, Delay by, Active Jobs, CICS and IMS selection criteria, Schedule and Schedule Options.

#### **Measuring a specific IMS transaction across multiple MPP regions**

To measure a specific IMS transaction that executes in multiple MPP regions, you must enter a dash (-) as the first and only character in the Jobname/Pattern field. The IMS transaction name and the IMS subsystem name or IMSPLEX group name must be entered on Panel 5 Subsystems. You must also select the MPP regions you want to monitor in Panel 4. Active Jobs. This feature is only available when the IMS Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary. When measuring a specific IMS transaction across multiple MPP regions, the following measurement options are not applicable and are ignored if used: Step specification/Multi Steps, Measure to step end, Delay by, Schedule and Schedule Options.

#### **Active/Inactive indicator**

When a NEW command is entered, Application Performance Analyzer checks for and displays the current status of the job, started task, or TSO region immediately below the jobname. When it is detected as active, 'Active' is displayed, otherwise, 'Inactive' is displayed. It is only necessary to use Panel 8 Sched Options if you

wish to change the observation status from that detected by Application Performance Analyzer.

When more than one active job is selected for measurement in Panel 4, the phrase '(Active - Multiple Jobs Selected)' is displayed below the Jobname. In this case, the name listed is the first job selected in Panel 4. You must use Panel 4 to view or change the jobs that are selected for measurement.

### **System name**

This field appears only if the Application Performance Analyzer you are connected to is configured as a member in a SYSPLEX group. Specify the name of the system on which the measured job is to run (or is currently running). Specify an asterisk (\*) in this field to indicate that the job could run on any of the systems in the group.

You can also select panel 6 to display a full list of available system names from which you can make a selection.

### **Step Specification Field Group**

Step specification is not applicable when measuring specific DB2 stored procedures or user-defined functions.

The job step to be measured is specified by a group of four fields (Step Number, Step Program, Step Name, ProcStepName). To identify the step, you can specify one of the following:

- Step Number by itself
- Step Program by itself
- Step Name by itself
- Step Name and ProcStepName

If you leave all of these fields blank, the first job step is assumed. You cannot specify any of these fields when you are specifying measurement of a job that is currently active.

To schedule the measurement of multiple steps in the same job, select panel 3.

### **Step No.**

If Step No. is specified, the other three step fields (Step Program, Step Name, and ProcStepName) must be left blank.

Step No. specifies the numeric step number.

For a NEW measurement, you may enter an asterisk (\*) in this field to measure all steps in the job.

For a threshold (TNEW) measurement, you may enter an asterisk (\*) in this field to measure all steps in the job that meet the threshold criteria entered in the Criteria panel.

### **Step Program**

If Step Program is specified, the other three step fields (Step No., Step Name, and ProcStepName) must be left blank. Program Step specifies the name of the program coded in the PGM= parameter of the EXEC statement for the step you want to measure.

### **Step Name**

If Step Name is specified, then Step Number, and Step Program must be left blank. You can specify Step Name by itself or in combination with ProcStepName.

Step Name specifies the symbol coded in the name field of an EXEC PGM = statement or an EXEC PROC = statement. In the event that the ProcStep name field is also supplied, this field always identifies the symbol coded in an EXEC PROC = statement.

In the event that the ProcStep name field is left blank, and Step Name matches an EXEC PROC = statement, the first step within that proc will be measured.

If the step to be measured is not within a proc, then Step Name specifies the symbol coded in the name field of an EXEC PGM = statement, and ProcStepName must not be specified.

#### **ProcStepName**

If ProcStepName is specified, then input must also be supplied in the Step Name field.

ProcStepName specifies the symbol coded in the name field of an EXEC PGM = statement that is part of a PROC.

#### **Description**

Enter a description for this observation request. This field is optional unless the option has been set during installation requiring a minimum description of 8 characters.

#### **Number of Samples**

Specify the number of times execution of the measured jobstep is to be sampled. Samples are taken in equal intervals. The sampling frequency is determined by dividing the number of samples by the specified measurement duration. If configured during installation, a default value will be displayed in this field for NEW and TNEW requests. An installation default value is used if you do not supply input in this field.

**Note:** This field is not used when sampling a DB2 DDF address space with the DB2+ extractor turned on, it will be ignored. In the case of DDF measurement, each SQL call is intercepted for the requested duration, no sampling takes place. The number of samples will always be converted to approximately one per second.

#### **Measure to step end**

This field is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Specify 'Y' in this field to indicate that the measurement is to continue to the end of the step even if the specified number of samples has been recorded. Measurement will continue at the sampling rate calculated based on the specified duration and number of samples.

#### **Duration (min:sec)**

Specify the duration of the measurement. You can specify the value in seconds or in minutes and seconds. To specify the duration in minutes and seconds, separate the minutes value from the seconds value using a colon. If configured during installation, a default value will be displayed in this field for NEW and TNEW requests. An installation default value is used if you do not supply input in this field. Examples:

- 135 specifies 135 seconds
- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

The measurement will proceed for the specified time and the sampling rate will be established at a frequency that would perform the full number of samples for the specified duration.

The measurement will terminate before the duration ends if the job step ends first.

**Delay by (secs)**

This field is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Specify a delay time, in seconds, to occur before initiation of the measurement. The delay will occur starting at the time execution of the job step begins. This cannot be specified for measurement of a job that is currently active.

**Notify TSO User**

Specify a TSO user ID to be notified upon completion of the measurement. Enter blanks in this field for no completion notification.

**Retain file for (days)**

Specify the number of days after completion of the measurement for which the measurement file is to be retained. The file and all information about the measurement will be deleted after this period. Enter blanks or zero in this field for no automatic deletion of the measurement data.

**USS observations**

Specify the maximum number of spawned address spaces or substeps to measure for a USS observation, up to the maximum defined in the system configuration. The same sampling frequency will be used for each spawned address space or substep. Sampling overhead can be high if several spawned address spaces are running simultaneously.

When this field is specified, the collection of measurements will be grouped under a USS master record on the Observation List panel.

**Note:** When you are deciding what values to enter in the Number of Samples and Duration fields, consider that Application Performance Analyzer does not have unlimited resources to store and report measurement data. Data spaces are used for collecting and reporting data. Extremely large amounts of measurement data can cause Application Performance Analyzer to fail in either the data collection or reporting process. Data space requirements for measurement data vary widely depending on the type of job or region being measured, data extractors selected, etc.

## Panel 2 – Options

Panel 2 is used to enter extended measurement options (“Data Extractors”), and also to specify additional load libraries or HFS directories to be searched for external symbol information.

Enter a slash “/” beside each of the data extractors required for the measurement. The data extractors are used to measure additional information about CICS, DB2, IMS, Java, MQSERIES, Adabas, Natural, WebSphere Application Services and Service Request Blocks. When the CICS, DB2, IMS, or WAS data extractor is specified, further transaction information can be specified in panel 5.

Panel 2 is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options           4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 2. Measurement Options

Data Extractors. '/'to select extended measurement options:
CICS  CICS information          CICS+ CICS service/CPU time
IMS   DLI call information      IMS+  DLI service/CPU time/counts
MQ    MQ call information       MQ+   MQ service/CPU time/counts
DB2   SQL call information     DB2+  SQL service/CPU time/counts
CDB2  Collateral DB2 activity  DB2V  SQL Variables
DB2X  DB2 EXPLAIN from bind   SRB   SRB Sampling
Ada   Adabas call information  Nat   Natural information
Java  Java information        WAS   WebSphere Activity

Specify up to 10 load libraries, or up to 440 bytes of HFS directories, to
search for external symbol information. The load libraries apply only to
sampled modules that are fetched from dynamically allocated load libraries.
The directories apply only to sampled HFS programs that do not have absolute
path names. Enter multiple directories separated by at least one space.

_ Specify L for load libraries, D for directories
1 _____
2 _____
3 _____
4 _____
5 _____
6 _____
7 _____
8 _____

```

If your installation has configured Application Performance Analyzer to display the maximum number of trace entries for DB2+, IMS+ and MQ+, three additional input fields are displayed in Panel 2 as shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options            4. Active Jobs   6. Sysplex      8. Sched Options

Panel 2. Measurement Options                               Input more data or ENTER to submit

Data Extractors. '/'to select extended measurement options:
- CICS CICS information      - CICS+ CICS service/CPU time
/ IMS DLI call information   / IMS+ DLI service/CPU time/counts
/ MQ MQ call information     - MQ+ MQ service/CPU time/counts
/ DB2 SQL call information   / DB2+ SQL service/CPU time/counts
- CDB2 Collateral DB2 activity - DB2V SQL Variables
- DB2X DB2 EXPLAIN from bind - SRB SRB Sampling
- Ada Adabas call information - Nat Natural information
- Java Java information      - WAS WebSphere Activity

50__ DB2+ Maximum number of trace entries in thousands
60__ IMS+ Maximum number of trace entries in thousands
60__ MQ+ Maximum number of trace entries in thousands

Specify up to 10 load libraries, or up to 440 bytes of HFS directories, to
search for external symbol information. The load libraries apply only to
sampled modules that are fetched from dynamically allocated load libraries.
The directories apply only to sampled HFS programs that do not have absolute
path names. Enter multiple directories separated by at least one space.

_ Specify L for load libraries, D for directories
1  _____
2  _____
3  _____
4  _____
5  _____
6  _____
7  _____
8  _____
9  _____
10 _____

```

## Panel 2 input fields

### Data Extractors

The data extractors are selected to direct Application Performance Analyzer to measure additional information about CICS, DB2, IMS, MQSeries, Java, Adabas, Natural or WebSphere Application Services. Use a slash to select one or more appropriate extractors.

**CICS** This option is used to collect information about CICS session statistics and CICS transactions. CICS data is reported in the E01 through E11 reports and the CICS Multiple Address Space X series of reports. This extractor can also be selected when the WAS extractor is selected. In this situation, the external CICS interface (EXCI) data will be captured from any WAS Servant observation sessions, and reported in the B11 report.

**CICS+** This option is used to collect additional information about CICS transactions, allowing exact transaction counts, service times and CPU times to be measured and reported in the E12 report. When CICS+ is selected, CICS is automatically included. Your installer might have chosen to limit access to this data extractor.

- DB2** This option is used to collect information about SQL calls made during measurement. DB2 data is reported in the F01 through F10, F13 and F14 reports.
- DB2+** This option is used to collect additional DB2 information, allowing exact call counts, service times, and CPU times to be measured and reported in the F11 and F12 reports. The F15 through F19 reports are produced for DDF measurements only. DB2+ also ensures that accurate SQL text is reported, as without DB2+ turned on it is possible for the SQL text to be incorrect. When DB2+ is selected, DB2 is automatically included. Your installer might have chosen to limit access to this data extractor, as DB2+ causes each DB2 call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. You should be careful when using this feature with other products that also intercept DB2 calls because unpredictable results might occur.
- DB2V** This option is used to activate the DB2 variable extractor during measurement. It will extract SQL variable names for sampled SQL calls. The variable names will then be substituted in place of the `:H` place holders when the SQL text is displayed. When DB2V is selected, DB2 and DB2+ are automatically included.
- DB2X** This option is used to activate the static DB2 explain extractor during measurement. When selected, Application Performance Analyzer will extract static EXPLAIN information for observed SQL statements that were bound in a package or plan with the EXPLAIN(YES) option. See DB2 EXPLAIN report for more details.
- CDB2** This option is used to activate the collateral DB2 extractor during measurement. When selected, Application Performance Analyzer measures DB2 activity in other address spaces when that activity is invoked by this original DB2 request; for example calls to stored procedures and user-defined functions. In the R02 Observation List, the collateral DB2 measurements are created separately and are grouped under this observation request. When CDB2 is selected, DB2 and DB2+ are automatically included. The CDB2 extractor is only available when your installation has enabled the WLM intercept in Application Performance Analyzer. Your installer might have chosen to limit access to this data extractor, as CDB2 causes each DB2 call and WLM call to be intercepted to collect additional data. This can have a small impact on the performance of the target address space.
- IMS** This option is used to collect information about IMS (DL/I) calls. IMS information is reported in the I01, and I03 through I15 reports.
- IMS+** This option is used to collect additional IMS information, allowing exact DL/I call counts, DL/I service times, and CPU times to be measured and reported in the I02, and I16 through I21 reports. When IMS+ is selected, IMS is automatically included. Your installer might have chosen to limit access to this data extractor, as IMS+ causes each DL/I call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. You should be careful when using this feature with other products that also intercept DL/I calls because unpredictable results might occur.

**Java** This option is used to collect detailed information about Java calls. Java information is reported in the J series of reports.

**MQ** This option is used to collect information about MQSeries interface calls (both dynamic and static) in Batch, IMS and CICS application programs. This extractor is not used to measure the MQ address space itself. MQSeries information is reported in the Q series of reports.

**MQ+** You can select MQ+ option by specifying a forward slash (/). Selecting MQ+ option activates the MQ+ Data Extractor during the measurement. To clear the MQ+ option, specify blank. MQ+ is an MQ measurement option where the precise number of MQ calls, the exact MQ service time and CPU time by MQ call is counted. When you select the MQ+ option, Application Performance Analyzer captures the data that is required to produce the MQ+ timeline and service time reports Q11 through Q14. This might have a small impact on the performance of the target address space. Be careful when you use the MQ+ feature with other products that also intercept MQ calls because unpredictable results might occur. Activating the MQ+ option automatically activates the MQ option.

**Ada** This option is used to collect information about Adabas calls. There are no special Adabas reports. Adabas calls are reported under the ADABAS category in several reports. The C08 CPU Usage Referred Attribution report can also be used to see the Attribution offset for Adabas calls and to source map the program. The Ada extractor is only available when your installation has enabled Adabas in Application Performance Analyzer.

**Nat** This option is used to collect information about Natural calls. Natural calls are reported in the C10 report. The Nat extractor is only available when your installation has enabled Natural in Application Performance Analyzer.

## **WAS**

This option is used to collect information about WebSphere Application Services requests. The WAS extractor is available only when your installation has enabled WebSphere Application Services in Application Performance Analyzer. Refer to the WAS checklist in Chapter 1 of the Application Performance Analyzer Customization Guide for the steps to enable WebSphere Application Services. Your installer might have chosen to limit access to this data extractor.

The Job Name field on Panel 1 must contain the name of a WebSphere Application Services controller address space. The controller is not actually sampled, since no application code runs in it. Instead, all WebSphere Application Services requests processed by the controller are recorded in the sample file and reported in the B01 to B10 reports. If during measurement of the controller, one or more servant regions become active, and the Application Performance Analyzer WLM Intercept has been enabled during installation, the servant region activity will be measured and reported in separate child observation sessions. You select any of the following extractors when WAS is selected: CICS, DB2, DB2+,

|  
|  
|  
|  
|



CDB2, DB2V, and JAVA. However, these extractors are only enabled for the WebSphere Application Services servant observation sessions.

**SRB** This option is used to collect detailed information about Service Request Block (SRB) activity during the measurement. When you select the option, the SRB measurement reports are generated. When measuring a DDF address space, the DB2+ and SRB extractors are mutually exclusive.

**Maximum number of trace entries (DB2+, IMS+ and MQ+)**

These fields are displayed only when your installation has configured Application Performance Analyzer to display them. Otherwise, your installation default is used.

For DB2+, enter the value (in thousands) to limit the number of DB2+ SQL call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the F02 Timeline report to report exact times for all SQL calls. The F02 report will be truncated at the number of calls specified in this field. The DB2+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value is entered in thousands of calls to be recorded and cannot exceed the default value specified for DB2IMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

For IMS+, enter the value (in thousands) to limit the number of IMS+ DLI call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the I02 and I03 Timeline reports to report exact times for all DLI calls and IMS transactions. The I02 and I03 reports will be truncated at the number of calls specified in this field. The IMS+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value is entered in thousands of calls to be recorded and cannot exceed the default value specified for IMSIMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

For MQ+, enter the value in thousands to limit the number of MQ call interceptions for which full details are written to the sample file. By collecting full details on every interception, exact times for all MQ calls can be reported in MQ+ reports. The Q11 report is truncated at the number of calls that are specified in this field. The MQ+ data extractor continues to collect the data that it requires for the other reports during the measurement. The value is entered in thousands of calls to be recorded. And the value cannot exceed the default value that is specified for MQIMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

**Specify L for load libraries, D for directories**

Specify either L or D to indicate whether Application Performance Analyzer is to search load libraries or directories.

**Libraries**

Specify up to 10 load libraries to be searched by Application Performance Analyzer for external symbol information. These are applicable only when sampled modules are fetched from dynamically allocated load libraries. See “Specifying additional libraries” on page 28 for more information.

## Directories

Specify up to 440 bytes of HFS directory path names to be searched by Application Performance Analyzer, each separated by one or more spaces. These are applicable only when sampled HFS programs have relative path names.

## Specifying additional libraries

It is sometimes necessary to specify additional libraries for Application Performance Analyzer to use to resolve sampled addresses to CSECT plus offset, instead of load module plus offset.

When one program issues a LOAD or LINK macro to fetch other load modules, they are typically loaded from STEPLIB or JOBLIB or a LINKLIST library. In this case Application Performance Analyzer will find them automatically during sampling.

However, the LOAD macro can be coded to reference a DCB for which a load library was OPENed. The library might have been allocated to a temporary DDNAME and after the LOAD is done, the DCB is closed and the DDNAME released. In this situation, Application Performance Analyzer has no way of determining what load library the module came from. Hence, it is unable to get CSECT (EBE) information. This would prevent such modules from being source mapped.

## Panel 3 – Multi-steps

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Panel 3 is used to specify that multiple job steps are to be measured. You can specify up to 20 steps, using the same specification rules described for single step measurements entered on panel 1. For more information, see “Panel 3 input fields” on page 29.

Panel 3 is shown here. In this example, three steps have been selected by StepName.

```
File View Navigate Help
-----
R03: Schedule New Measurement          Row 00001 of 00021
Command ==> _____ Scroll ==> CSR

o 1. Job Information   3. Multi Steps   5. Subsystems   7. Schedule
o 2. Options          4. Active Jobs  6. Sysplex     8. Sched Options

Panel 3. Measure Multiple Steps

Enter data here to measure multiple steps. Separate measurement files will
be produced for each step. '*' in the first StepNo selects all steps.

StepNo Program StepName ProcStep StepNo Program StepName ProcStep
-----
   1  _____ IDC01 _____   1  _____ PGM0003 _____
   2  _____ PGM0005 _____   2  _____ _____ _____
   3  _____ _____ _____   3  _____ _____ _____
   4  _____ _____ _____   4  _____ _____ _____
   5  _____ _____ _____   5  _____ _____ _____
   6  _____ _____ _____   6  _____ _____ _____
   7  _____ _____ _____   7  _____ _____ _____
   8  _____ _____ _____   8  _____ _____ _____
   9  _____ _____ _____   9  _____ _____ _____
  10  _____ _____ _____  10  _____ _____ _____
```

## Panel 3 input fields

Each step specification has a group of four fields. These four fields follow exactly the same rules as the step fields in panel 1.

### Step Specification Field Group

The job step to be measured is specified by a group of four fields (Step Number, Step Program, Step Name, ProcStepName). To identify the step, you can specify one of the following:

- Step Number by itself
- Step Program by itself
- Step Name by itself
- Step Name and ProcStepName

### Step No.

If Step No. is specified, the other three step fields (Step Program, Step Name, and ProcStepName) must be left blank.

Step No. specifies the numeric step number. Specify an asterisk (\*) in the first Step No. field to indicate that all steps in the job are to be measured.

### Step Program

If Step Program is specified, the other three step fields (Step No., Step Name, and ProcStepName) must be left blank.

Program Step specifies the name of the program coded in the PGM = parameter of the EXEC statement for the step you want to measure.

### Step Name

If Step Name is specified, then Step Number, and Step Program must be left blank. You can specify Step Name by itself or in combination with ProcStepName.

Step Name specifies the symbol coded in the name field of an EXEC PGM = statement or an EXEC PROC = statement. In the event that the ProcStep name field is also supplied, this field always identifies the symbol coded in an EXEC PROC = statement.

In the event that the ProcStep name field is left blank, and Step Name matches an EXEC PROC = statement, the first step within that proc will be measured.

If the step to be measured is not within a PROC, then Step Name specifies the symbol coded in the name field of an EXEC PGM = statement, and ProcStepName must not be specified.

### ProcStepName

If ProcStepName is specified, then input must also be supplied in the Step Name field.

ProcStepName specifies the symbol coded in the name field of an EXEC PGM = statement that is part of a PROC.

## Panel 4 – Active Jobs

Panel 4 is used to select active jobs from a list. You can enter a Prefix to limit the jobs listed. If you enter a Pattern in the Job name/Pattern field in panel 1, this will be entered as the Prefix in panel 4. This is an input field, you can change the prefix while in panel 4.

Panel 4 is shown here. In this example the prefix entered is "C\*".

```

File View Navigate Help
-----
R03: Schedule New Measurement Row 00001 of 00019
Command ==> _____ Scroll ==> CSR

o 1. Job Information o 3. Multi Steps 5. Subsystems 7. Schedule
o 2. Options 4. Active Jobs 6. Sysplex 8. Sched Options

Panel 4. Active Jobs

Enter S to select an active job step to be measured. Prefix . . C* _____

JobName Type JobId StepName ASIDX System CPU% SIO
CATALOG STC N/A CATALOG 0020 X235 0.00 0.00
CICS22A STC STC01159 CICS22A 00AB X235 2.18 0.00
CICS22C STC STC03379 CICS22C 0190 X235 1.98 0.00
CICS31A STC STC03246 CICS31A 00B5 X235 2.58 0.00
CICS32A STC STC02104 CICS32A 0115 X235 2.58 0.00
CONSOLE STC N/A CONSOLE 0009 X235 0.00 0.00
CSQ6MSTR STC STC00454 CSQ6MSTR 0032 X235 5.95 0.00

```

Enter "S" beside the active job(s) you want to measure. You can select multiple active jobs to be measured simultaneously. The maximum number of jobs that can be selected is defined during the installation of Application Performance Analyzer. This feature is used to measure multiple active jobs at the same time, and is typically used for CICS and IMS multiple address space support.

When multiple jobs are selected, the selected jobs are listed in the lower half of the panel in Selected Jobs List. You add jobs to the Selected Jobs List by entering 'S' beside the active jobs in the upper half of the panel. Enter 'D' beside the active job in the lower half of the panel to remove jobs from the Selected Jobs List. When you return to Panel 1, the first job selected is displayed in the Jobname//Pattern field, and '(Active - Multiple Jobs Selected)' is displayed below the Jobname to indicate that multiple jobs are selected. Multiple jobs can be selected only in NEW requests, and are not valid for Threshold or Trigger requests.

Panel 4 is shown here with multiple CICS regions selected for measurement simultaneously.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00011
Command ==>>> _____ Scroll ==>> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              o 4. Active Jobs    6. Sysplex        8. Sched Options

Panel 4. Active Jobs                                     Input more data or ENTER to submit

Enter S to select an active job step to be measured.   Prefix . . CICS* _____

  JobName  Type  JobId  StepName  Procstep  ASIDX  System  CPU%  SIO
  -----  ---  -----  -----  -----  -----  -----  ---  ---
- CICS31A  STC  STC02977 CICS31A  CICS     01AC  X235    1.08  0.00
- CICS32A  STC  STC02278 CICS32A  CICS     0167  X235    1.08  0.00
- CICS32B  STC  STC02122 CICS32B  CICS     0151  X235    0.72  0.00
- CICS41A  STC  STC02300 CICS41A  CICS     016E  X235    1.44  0.00

Selected Jobs List
Enter D to remove an active job from the list.

  JobName  System
  -----  -----
- CICS32A  X235
- CICS32B  X235

```

## Panel 5 – Subsystems

Use this multi-purpose panel to specify further information about the measurement of CICS regions, IMS regions, specific DB2 stored procedures or user-defined functions, DB2 DDF address spaces and WebSphere (WAS) controllers. Panel 5 has three different appearances depending on the purpose of the measurement.

For a typical CICS, IMS or DDF measurement, Panel 5 displays mutually exclusive input fields that are specific to the CICS transactions and terminals, or IMS transaction, program and userid, or DDF filtering criteria.

- For CICS, you can specify the CICS transaction codes and terminals for which CICS measurement information is to be recorded. Limiting the CICS transactions and terminals you are interested in can have a significant impact on the resources consumed by the measurement process.
- For IMS, when you are measuring one MPP or IFP region, you can specify the IMS transaction, program and user ID for which measurement information is to be recorded.
- For DDF measurements, you can specify the Correlation Id, End User Id and/or Workstation Id for which measurement information is to be recorded.

For a multiple address space measurement, where a dash (-) is entered in the Jobname field in Panel 1, Panel 5 displays mutually exclusive input fields specific to DB2 stored procedures and user-defined functions, or IMS transactions that execute across multiple IMS regions.

- For DB2 multiple address space support, when you are measuring specific DB2 stored procedures or user-defined functions, you can specify the DB2 subsystem name or the DB2 group attach name, a P or F to identify the request, the schema name and the stored procedure or user-defined function name.
- For IMS multiple region support, when you are measuring an IMS transaction that executes across multiple MPP regions, you can specify the IMS subsystem name or IMSplex group name, and the IMS transaction name.

For a WebSphere measurement where the WAS extractor is selected in Panel 2, Panel 5 displays WebSphere filtering criteria. You can specify the request name,

application name, and/or origin for which measurement information is to be recorded. You can also use this panel to filter out image activity and/or specific file extensions.

A sample panel 5 for CICS, an IMS region and DDF is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00025
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options            4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 5. Subsystems Measurement Criteria

Specify up to 16 CICS trancodes for which measurement data is to be
recorded.

  01 *___ 02 ___ 03 ___ 04 ___ 05 ___ 06 ___ 07 ___ 08 ___
  09 ___ 10 ___ 11 ___ 12 ___ 13 ___ 14 ___ 15 ___ 16 ___

Include CICS system transaction in measurement(Y/N): N

Wildcard character '*' can be specified at the end of a partial name.
*' by itself specifies all transactions of terminals.

Specify up to 8 CICS terminal IDs for which measurement data is to be recorded.

  01 *___ 02 ___ 03 ___ 04 ___ 05 ___ 06 ___ 07 ___ 08 ___

Include CICS non-terminal transactions in measurement(Y/N): Y

Enter IMS/TM selection parameters:

  Transaction _____ Program Name _____ User ID _____

Specify filter criteria for DDF observation. Wildcards are accepted.

Correlation Id _____ or _ '/' for null (binary zero)
End User Id _____ or _ '/' for null (binary zero)
Workstation Id _____ or _ '/' for null (binary zero)

```

A sample panel 5 where you can enter information about a specific DB2 stored procedure or an IMS transaction and IMS subsystem or IMSplex group is shown here. This panel is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options            4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 5. Subsystems Measurement Criteria

Enter DB2 stored procedure or user-defined function parameters:

DB2 Subsystem _____ or DB2 Group Attach Name _____
Specify P for procedure or F for function _
Schema _____
Name _____

Enter IMS/TM selection parameters:
IMS Subsystem Id _____ or IMSPLEX Group Name _____
Transaction _____

```

A sample panel 5 for WebSphere is shown here:

```
File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00019
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
o 2. Options           o 4. Active Jobs    6. Sysplex      8. Sched Options

Panel 5. Subsystems Measurement Criteria

Enter any required WAS filter criteria.

Request name:
_____

Application name:
_____

Origin:
_____

Origin format: (use a slash to select one of the following)
_ IP address _ Host name _ Job name

Filter out image activity? (.gif .jpg etc): N (Y/N)

Filter out requests with these extensions:
_____
```

## Panel 5 input fields

For a CICS measurement:

### CICS Trancode

Specify a CICS transaction name or pattern. This identifies CICS transactions to be included in the measurement. You can also specify a partial name terminated by an asterisk (\*) to indicate a wildcard pattern. You can specify up to 16 names/patterns. Specify an asterisk (\*) by itself to measure all transactions.

### Include CICS System Txns

Specify Y or N to indicate if the measurement is to include data on CICS system transactions. (Normally set to No).

### CICS Terminal ID

Specify a CICS terminal ID name or pattern. This identifies CICS terminals to be included in the measurement. You can also specify a partial name terminated by an asterisk (\*) to indicate a wildcard pattern. You can specify up to eight names/patterns. Specify an asterisk (\*) by itself to measure all terminals.

### Include CICS non-terminal transaction

Specify Y or N to indicate if the measurement is to include data on CICS non-terminal transactions.

For a single IMS region measurement:

### IMS Transaction

Specify an IMS transaction id or pattern. This identifies IMS transactions to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (\*) to indicate a wildcard pattern.

Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

#### **IMS Program**

Specify an IMS program name or pattern. This identifies IMS programs to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (\*) to indicate a wildcard pattern.

Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

#### **IMS User ID**

Specify a userid or pattern. This identifies that transactions initiated by the userid are to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (\*) to indicate a wildcard pattern. Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

**Note:** When limiting the observation to specific IMS transactions, programs or users in an MPP or IFP region, Application Performance Analyzer samples only when the transactions are running. The observation continues to run for the requested duration.

#### **For a DB2 DDF measurement:**

##### **Correlation Id**

Specify a DB2 correlation id or pattern. This identifies a DB2 correlation id to be included in the measurement when measuring a DDF address space. A correlation id of null (binary zero) may be specified by entering a '/' in the selection field next to the Correlation Id field. You may also specify a wildcard pattern using an asterisk (\*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request is included in the measurement.

##### **End User Id**

Specify an end user id or pattern. This identifies an end user id to be included in the measurement when measuring a DDF address space. An end user id of null (binary zero) may be specified by entering a '/' in the selection field next to the End User Id field. You may also specify a wildcard pattern using an asterisk (\*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request should be included in the measurement.



**Workstation Id**

Specify a workstation id or pattern. This identifies a workstation id to be included in the measurement when measuring a DDF address space. A workstation id of null (binary zero) may be specified by entering a '/' in the selection field next to the Workstation Id field. You may also specify a wildcard pattern using an asterisk (\*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request should be included in the measurement.

**For a DB2 stored procedure or user defined function measurement:****DB2 Subsystem**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Specify a DB2 subsystem. This identifies the DB2 subsystem that will be used to run the stored procedure or user-defined function. This field is mutually exclusive with the DB2 Group Attach Name field.

**DB2 Group Attach Name**

DB2 Group Attach Name field is displayed only when you enter a dash (-) in the Job Name/Pattern field in panel 1. If you want to identify the DB2 group that will be used to run the stored procedure or user-defined function, specify a DB2 group attach name. The DB2 Group Attach Name field is mutually exclusive with the DB2 Subsystem field.

**Specify procedure or function**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Identify this request as a stored procedure or user-defined function. Enter P for stored procedure or F for a user-defined function.

**Schema**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Specify the schema name for this stored procedure or user-defined function. You can specify a schema name pattern; for example, a schema name prefix followed by an asterisk (\*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches that schema name pattern and name concatenation. If a single asterisk is coded in both schema and name, Application Performance Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

**Name** This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1. Specify the name of the stored procedure or user-defined function. You can specify a name pattern; for example, a name prefix followed by an asterisk (\*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches that schema name and name pattern concatenation. If a single asterisk is coded in

both schema and name, Application Performance Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

**For an IMS multiple region measurement:**

**IMS Subsystem Id**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify an IMS subsystem. This identifies the IMS subsystem in which the IMS transaction you are measuring runs.

**IMSPLEX Group Name**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify the IMSPlex XCF group name. This identifies the IMSPlex where the IMS transaction will run. Either the CSL group name, which is defined by the IMSPLEX parameter in the DFSCGxxx member of the IMS proclib, prefixed by the characters "CSL", or the IMS Shared Queues group name, which is defined by the SQGROUP parameter in the DFSSQxxx member of the IMS proclib, can be specified. These parameters can also be found in the DFSDFxxx member of the IMS proclib. IMS Subsystem ID and IMSPLEX Group Name are mutually exclusive.

**Transaction**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify an IMS transaction code. This identifies the IMS transaction to be included in the measurement. All active MPP regions that are eligible to process the transaction code on the specified IMS subsystem are returned on panel 4.

**For a WebSphere measurement:**

**Request name**

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards. If the field is left blank, no filtering is applied. Otherwise, only WAS requests that match the request name filter will be written to the sample file.

**Application name**

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard. Embedded asterisks are not treated as wildcards. If the field is left blank, no filtering is applied. Otherwise, only WAS requests that invoked an application that matches the filter will be written to the sample file.

**Origin**

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. It can be an IP address, a host name, or a job name. Only WAS requests that came from the specified origin will be written to the sample file. A trailing asterisk can be used as a wildcard character. If the field is left blank, no filtering is applied.

### **Origin format**

This field is displayed only for WAS filter criteria. It is required if an origin filter is specified. Enter a slash against the type of origin filter:

#### **IP address**

The filter value must be a valid IPv4 or IPv6 address. If a wildcard is used, it can only appear after a dot separator (for IPv4) or a colon separator (for IPv6). For example:

```
207.245.47.*  
2001:db8:85a3:0:*
```

However, a wildcard cannot be used with an IPv6 filter if it contains two consecutive colons. For example, the following filter value is invalid:

```
2001:db8:85a3::8a2e:*
```

This is because the two consecutive colons and the asterisk wildcard both represent a varying number of missing values.

#### **Host name**

The filter value can be from 1 to 79 non-blank characters. The characters are restricted to alpha-numeric, hyphen and underscore. A trailing asterisk can be used as a wildcard. WAS can sometimes show an IP address as a host name. To filter these, you must specify the filter value as an IP address, not a host name.

#### **Job name**

The filter value can be from 1 to 8 alpha-national characters. A trailing asterisk can be used as a wildcard.

#### **Filter out image file activity**

This field is displayed only for WAS filter criteria. It specifies whether or not requests for image files should be filtered out. Image files are identified by request names that end in any of the following file extensions:

```
.gif .jpg .jpeg .png .ico
```

#### **Filter out requests with these file extensions**

This field is displayed only for WAS filter criteria. It can be used to specify a series of file extensions, each separated by a space. Any requests for those file types will be filtered out. For example:

```
.css .pdf .txt
```

Any WAS request whose request name ends in one of the specified file extensions will be filtered out. Each file extension must begin with a period and must be followed by at least one non-blank character. Wildcards cannot be used in this filter.

## **Panel 6 – Sysplex**

This panel is used to select a target Sysplex system from a list. You can also choose ALL systems, in which case the target job will be measured on the first system to run it. You cannot select ALL for active jobs. Selecting ALL is the same as entering an asterisk (\*) in the System Name field on panel 1.

A sample panel 6 is shown here.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==>>> _____ Scroll ==>>> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
o 2. Options           4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 6. Sysplex

Target System. 'S' to select one option from the list (scrollable):
- ALL All Sysplex members eligible
- SYSA
- SYSB
- SYSE
- XS02
- XS03
- XS05

```

## Panel 7 – Schedule

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

This panel is used to generate a schedule for repetitions of future measurements. A maximum of 105 future scheduled measurement entries is allowed.

The panel is shown here before any future schedule data has been entered:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==>>> _____ Scroll ==>>> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  7. Schedule
o 2. Options         4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __      Repeat . . __ times
Time (hh mm) . . __ __          After . . . __ days __ minutes

Use this panel to specify a schedule for repetitions of the measurement.
Input the above fields and press ENTER to generate dates and times for
each of the measurements. These dates/times will be shown below in a
scrollable table which you can add to by repeating this input process.

```

Using this panel to create a future schedule is explained in the example below. Note that there are also important fields on panel 8 related to future schedules. If it is not known when the job will run, use panel 8 to specify how many times to repeat the measurement.

### Example of creating a Future Schedule

If a user wanted to measure a job every Wednesday night at 8:00 pm, and every Friday night at 11:00 pm, for 10 weeks, starting on Wednesday Dec. 8, 2004, it would be set up like this:

1. Enter the first Wednesday date in the Date (yy mm dd) field: 04 12 08.
2. Enter 10 in the Repeat \_\_ times field.
3. Enter 20:00 in the Time (hh mm) field.
4. Enter 7 in the After \_\_ days field. (To indicate that it repeats each 7 days).

The screen would look like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  7. Schedule
o 2. Options          4. Active Jobs  6. Sysplex      8. Sched Options

Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . 04 12 08          Repeat . . 10 times
Time (hh mm) . . 20 00              After . . . 7 days ___ minutes

Use this panel to specify a schedule for repetitions of the measurement.
Input the above fields and press ENTER to generate dates and times for
each of the measurements. These dates/times will be shown below in a
scrollable table which you can add to by repeating this input process.

```

Then press Enter to generate the schedule, it will appear at the bottom of the panel like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  o 7. Schedule
o 2. Options          4. Active Jobs  6. Sysplex      8. Sched Options

Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __          Repeat . . __ times
Time (hh mm) . . __ __              After . . . __ days __ minutes

Measurement Schedule (/ for line command list, UP/DOWN to scroll)
SeqN  Date/Time      Status
0001  Wed Dec-08-04 20:00  Pending ADD
0002  Wed Dec-15-04 20:00  Pending ADD
0003  Wed Dec-22-04 20:00  Pending ADD
0004  Wed Dec-29-04 20:00  Pending ADD
0005  Wed Jan-05-05 20:00  Pending ADD
0006  Wed Jan-12-05 20:00  Pending ADD
0007  Wed Jan-19-05 20:00  Pending ADD
0008  Wed Jan-26-05 20:00  Pending ADD
0009  Wed Feb-02-05 20:00  Pending ADD
0010  Wed Feb-09-05 20:00  Pending ADD
***** End of Schedule *****

```

Now enter similar data for the Friday night schedule like this:

5. Enter the first Friday date in the Date (yy mm dd) field: 04 12 10.
6. Enter 10 in the Repeat \_\_ times field.
7. Enter 23:00 in the Time (hh mm) field.
8. Enter 7 in the After \_\_ days field. (To indicate that it repeats each 7 days).

Press Enter and your Friday dates will appear with the Wednesday dates already generated like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  o 7. Schedule
o 2. Options          o 4. Active Jobs  o 6. Sysplex    o 8. Sched Options

Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __         Repeat . . __ times
Time (hh mm) . . __ __             After . . . __ days __ minutes

Measurement Schedule (/ for line command list, UP/DOWN to scroll)
SeqN  Date/Time      Status
0001  Wed Dec-08-04 20:00  Pending ADD
0002  Fri Dec-10-04 23:00  Pending ADD
0003  Wed Dec-15-04 20:00  Pending ADD
0004  Fri Dec-17-04 23:00  Pending ADD
0005  Wed Dec-22-04 20:00  Pending ADD
0006  Fri Dec-24-04 23:00  Pending ADD
0007  Wed Dec-29-04 20:00  Pending ADD
0008  Fri Dec-31-04 23:00  Pending ADD
0009  Wed Jan-05-05 20:00  Pending ADD
0010  Fri Jan-07-05 23:00  Pending ADD
0011  Wed Jan-12-05 20:00  Pending ADD
0012  Fri Jan-14-05 23:00  Pending ADD
0013  Wed Jan-19-05 20:00  Pending ADD
0014  Fri Jan-21-05 23:00  Pending ADD
0015  Wed Jan-26-05 20:00  Pending ADD
0016  Fri Jan-28-05 23:00  Pending ADD
0017  Wed Feb-02-05 20:00  Pending ADD
0018  Fri Feb-04-05 23:00  Pending ADD
0019  Wed Feb-09-05 20:00  Pending ADD
0020  Fri Feb-11-05 23:00  Pending ADD
***** End of Schedule *****

```

Your schedule dates have now all been generated. Also see panel 8 below for additional data regarding future schedules.

**Note:** If you are entering a multiple job request (using the % wildcard in the job name field), then you can only set one date and time. No repetitions are allowed.

## Panel 7 input fields

### First Schedule Date

Specify a starting date for a new sequence of recurring schedule date/time entries.

### Schedule Repeat Count

Specify a repeat count. This is the number of measurement recurrences to be generated and added to the schedule. The maximum value that can be entered in this field is 99. Application Performance Analyzer will accept a schedule with up to 105 repeats.

To generate a schedule with more than 99 repeats, you must generate two schedules for the same request. After generating the repeats for the first schedule, remain in Panel 7 and generate another schedule for the remaining repeats.

### First Schedule Time

Specify a starting time for a new sequence of recurring schedule date/time entries.

### Interval in Days

Specify the interval, in days, between each measurement recurrence to be added to the schedule.

### Interval in Minutes

Specify the interval, in minutes, between each measurement recurrence to be added to the schedule.

## Panel 8 – Sched Options

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

The available fields on panel 8 vary depending on whether “Y” or “N” is entered in the Measure active job (Y/N) field, and whether or not a future schedule has been entered on panel 7.

### No Future Schedule and Active YES

When there is no future schedule, and “Y” is entered in the Measure active job (Y/N) field, then no additional fields will appear on panel 8. In this case, specifying “Y” here is an alternative to selecting an active job from a list in panel 4. If you use this method to specify that a job is active, then the jobname entered in panel 1 must be currently active, otherwise the request will fail.

An example of panel 8 for a single occurrence of an active job (i.e., with no future schedule) is shown here:

```
File View Navigate Help
-----
R03: Schedule New Measurement Row 00001 of 00004
Command ==> _____ Scroll ==> PAGE

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options           4. Active Jobs   6. Sysplex      8. Sched Options

Panel 8. Schedule Options

Specify if the job is active and is to be measured immediately (Y) or if
IBM APA for z/OS is to wait for the job to be submitted (N):

Measure active job (Y/N) . . . . Y
```

### No Future Schedule and Active NO

When there is no future schedule, and “N” is entered in the Measure active job (Y/N) field, then the field Times to Repeat and Within interval (minutes, days or weeks) will appear.

An example of panel 8 for a single occurrence of an inactive job (i.e., with no future schedule) is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems  7. Schedule
  2. Options            4. Active Jobs   6. Sysplex    8. Sched Options

Panel 8. Schedule Options

Specify if the job is active and is to be measured immediately (Y) or if
IBM APA for z/OS is to wait for the job to be submitted (N):

Measure active job (Y/N) . . . . N

Times to repeat measurement . __    If the job runs more than once.

Within interval (minutes) . . __    Maximum 999 minutes.
or within interval (days) . . __    Maximum 22 days.
or within interval (weeks) . . __    Maximum 3 weeks.

```

**Future Schedule and Active YES**

When entering a future schedule request, selecting “Y” for active means that the job is expected to be active when the measurement takes place. The fields Number of times to retry and Retry interval (minutes) will appear.

An example of panel 8 for an active job with a future schedule is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00007
Command ==> _____ Scroll ==> PAGE

o 1. Job Information    3. Multi Steps    5. Subsystems  o7. Schedule
  2. Options            4. Active Jobs   6. Sysplex    o8. Sched Options

Panel 8. Schedule Options                                Input more data or ENTER to submit

Specify if the job to be measured will be active when the scheduling occurs
(e.g. a CICS region) or pending (a batch job).

Job will be active (Y/N) . . . . Y

Number of times to retry . . . __    Indicate retry action if job is not
Retry interval (minutes) . . . __    active at the time of scheduling.

```

**Future Schedule and Active NO**

When entering a future schedule request, selecting “N” for not active means that the request will wait for the job to start. In this case three additional fields will appear: Expire after (minutes), Times to repeat measurement, and Within interval (minutes).

An example of panel 8 for an inactive job with a future schedule is shown here:



```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==>                                               Scroll ==> CSR
o 1. Job Information   3. Multi Steps   5. Subsystems o 7. Schedule
  2. Options           4. Active Jobs  6. Sysplex    8. Sched Options

Panel 8. Schedule Options

Specify if the job to be measured will be active when the scheduling occurs
(e.g. a CICS region) or pending (a batch job).

Job will be active (Y/N) . . . . N

  Expire after (minutes) . . . ____   Number of minutes from schedule time
                                         to wait for job to be submitted.

  Times to repeat measurement . ____   If the job runs more than once.
  Within interval (minutes) . . ____

```

## Panel 8 input fields

### Job Active (Y/N)

Specify Y to indicate the job is active and the measurement is to begin immediately. Specify N to indicate that the job is pending (a batch job) and Application Performance Analyzer is to wait for its execution.

If you have specified a recurring schedule for the measurement, then this field indicates the expected status of the job at the time the measurement is scheduled.

### Expire after

This applies to a schedule of recurring measurements for a job that is not expected to be active at scheduling time (a batch job). It specifies the length of the interval during which Application Performance Analyzer is to check for the job before expiring the schedule item. Specify the length of the interval in minutes.

### Times to Repeat

This applies to measurement of a job that is not active (pending). Known as the RUNAGAIN count, it specifies the number of times the measurement is to be repeated if the job is rerun. This can be used as an alternative to specifying a schedule on panel 7 if the exact date and time of each run is not known.

Optionally, a time interval can be specified, within which the job must run to be measured again. Use this to ensure that a good measurement is captured in the event that the job is cancelled or abends and is then rerun. If you have specified a schedule in panel 7, then you must provide a time interval for the repeat measurements.

### Within Interval

This applies to measurement of a job that is not active (pending). Specify the interval the Application Performance Analyzer started task is to check for reruns of the job. Use this to ensure that a good measurement is captured in the event that the job is cancelled or abends and is then rerun. If you have specified a schedule in panel 7, then you must provide a time interval for the repeat measurements.

In the case of a single occurrence of a batch job, use this when the exact time the job will be executed is unknown or varies. Measurements that have a future schedule associated with the job will accommodate an

interval of up to 999 minutes only. Measurements for a single occurrence of a job (i.e., no future schedule) will accommodate an interval of either 999 minutes, 22 days or 3 weeks.

#### **Times to Retry**

This applies to a schedule of recurring measurements for a job that is expected to be active at the time the measurement is scheduled. Indicate the number of times Application Performance Analyzer is to check again for the job in the event that it was not active. The 'Retry Interval' field specifies the interval between retries.

#### **Retry Interval**

This applies to a schedule of recurring measurements for a job that is expected to be active at the time the measurement is scheduled. It specifies an action to be taken if the job is not active at the schedule time. Indicate the interval between each check for the job being active. The 'Number of Times to Retry' field specifies how many times the retry is to occur.

---

## **Entering a Threshold Monitor request**

### **Overview**

Threshold monitor requests are used to initiate an observation on job-steps that exceed a user-defined threshold. You can create the threshold monitor request by using the TNEW command, which specifies the criteria that Application Performance Analyzer uses to initiate the observation. You can set up a single-step threshold monitor request to initiate an observation for a single job-step. You can also set up a multi-step threshold monitor request to initiate an observation for all steps in a job that exceed the criteria. The same criteria are used for all job steps.

Threshold monitor requests can be used to trigger the measurement of another job by entering the Trigger (TR) command on the threshold measurement. In this case, when the threshold criteria are exceeded for a single job-step, Application Performance Analyzer also begins executing the trigger request. In the case of a multi-step threshold request, only the first step that exceeds the threshold criteria initiates the trigger request.

Threshold monitor requests cannot be created for measuring specific DB2 Stored Procedures and IMS multiple address space measurements.

It is important that you are already familiar with the preceding information in this chapter before you use the threshold monitor feature. The threshold monitor request process uses most of the panels that are described in the previous sections, and the information is not repeated here.

### **Using the TNEW command**

The TNEW primary command is used to enter a new Observation Request, which will start only when specified threshold criteria have been satisfied for the target job-step or job-steps.

The criteria are:

- CPU Time
- Elapsed Time
- EXCP Count

## Setting Threshold Requirements panels

The Set Threshold Requirements panel group is very similar to the standard Schedule New Measurement panel group. To measure all steps in the job that meet the threshold criteria you must enter an asterisk (\*) in the Step No field of Panel 1 – Job Information. Multi-Step and Schedule information is not used for Threshold Monitor requests, so these panels are not available. Panel 3 - Criteria is specific to Threshold Monitor request. After entering the standard data to describe the measurement request, you must enter the Threshold Criteria.

### Panel 3 - Criteria

After entering the data to describe the measurement request, you use the Criteria panel to specify the Threshold Criteria which will trigger the measurement to run. The panel 3 Criteria panel is shown here.

In this example, when CPU time exceeds 30 seconds, and EXCP count exceeds 20000, the measurement will be triggered.

```
File View Navigate Help
-----
R03: Set Threshold Requirements                               Row 00001 of 00005
Command ==> _____ Scroll ==> CSR
o 1. Job Information  o 3. Criteria      o 5. Subsystems
  2. Options          4. Active Jobs    6. Sysplex
-----
Panel 3. Threshold Criteria

Enter Threshold Criteria

CPU Time Exceeds (min:sec) . . . 30
Elapsed Time Exceeds (min:sec) .
EXCP Count Exceeds . . . . . 20000

If you enter more than one threshold criteria field, then all the
criteria must be met for the measurement to be triggered.
```

### Panel 3 input fields

#### CPU Time Exceeds

Enter the threshold amount of CPU time, if the target job-step exceeds this amount of CPU time, the measurement will be triggered.

You can specify the value in seconds or in minutes and seconds. To specify the threshold CPU time in minutes and seconds, separate the minutes value from the seconds value using a colon.

Examples:

- 135 specifies 135 seconds
- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

#### Elapsed Time Exceeds

Enter the threshold amount of Elapsed time, if the target job-step exceeds this amount of Elapsed time, the measurement will be triggered.

You can specify the value in seconds or in minutes and seconds. To specify the threshold Elapsed time in minutes and seconds, separate the minutes value from the seconds value using a colon.

Examples:

- 135 specifies 135 seconds

- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

#### **EXCP Count Exceeds**

Enter the threshold EXCP count. If the target job-step exceeds this EXCP count, the measurement will be triggered.

**Note:** : If you enter more than one threshold criteria field, then all the criteria must be met for the measurement to be triggered.

**Note:** If the target job executes, and the threshold criteria are not met, the threshold measurement request is canceled.

---

## **Entering a Trigger request**

### **Overview**

The trigger request feature is used to allow the start of one scheduled measurement to trigger an additional measurement called the Trigger measurement. For example, you might want to have the beginning of a batch job-step measurement initiate a measurement of a particular CICS region. You must enter the original scheduled measurement request first, and then the trigger measurement.

A threshold request can be used to trigger another measurement. For example, you might want a job-step that exceeds the threshold criteria to also initiate a measurement of a particular CICS region. In the case of a multi-step threshold request, only the first step that exceeds the threshold criteria initiates the trigger request.

A trigger request cannot be created to measure a specific DB2 Stored Procedure and multiple IMS address spaces.

It is important to be familiar with the preceding information in this chapter before using the Trigger feature. The Trigger request process uses most of the panels described in the previous sections and the information is not repeated here.

### **Using the TR line command**

The original scheduled measurement request is identified by entering the TR line command on it in the R02 Observation Session List panel. This displays the panels for entering the measurement request information for the trigger request.

The Set Trigger Requirements panel group is very similar to the standard Schedule New Measurement panel group. The differences are that Multi-Step and Schedule information is not used for Trigger requests, so these panels are not available. For information on panels used to specify Trigger requests, refer to the preceding sections in this chapter.

---

## Chapter 3. Performance analysis reports

This section describes the Performance Analysis Reports. Some basic concepts are covered, and the base reports (those not pertaining to a data extractor) are described.

For Performance Analysis Reports pertaining to a specific data extractor (CICS, IMS, DB2, etc.), refer to the chapter for the specific data extractor.

For information about ...	See ...
General concepts required for interpreting these reports	"Performance analysis basics" on page 48
Report categories and codes	"Report categories and codes" on page 51
S01 Measurement profile	"S01 - Measurement profile" on page 56
S02 Load module attributes	"S02 - Load module attributes" on page 67
S03 Load module summary	"S03 - Load module summary" on page 69
S04 TCB summary	"S04 - TCB summary" on page 71
S05 Memory usage timeline	"S05 - Memory usage timeline" on page 73
S06 Data space usage timeline	"S06 - Data space usage timeline" on page 75
S07 TCB execution summary	"S07 - TCB execution summary" on page 76
S08 Processor utilization summary	"S08 - Processor utilization summary" on page 78
S09 Measurement analysis	"S09 - Measurement analysis" on page 80
S10 Observation Session Messages	"S10 - Observation Session Messages" on page 81
C01 CPU usage by category	"C01 - CPU usage by category" on page 82
C02 CPU usage by module	"C02 - CPU usage by module" on page 90
C03 CPU usage by code slice	"C03 - CPU usage by code slice" on page 93
C04 CPU usage timeline	"C04 - CPU usage timeline" on page 97
C05 CPU Usage by task/category	"C05 - CPU usage by task/category" on page 99
C06 CPU Usage by task/module	"C06 - CPU usage by task/module" on page 106
C07 CPU usage by procedure	"C07 - CPU usage by procedure" on page 110
C08 CPU usage referred attribution	"C08 - CPU usage referred attribution" on page 114
C09 CPU Usage by PSW/object code	"C09 - CPU usage by PSW/object code" on page 120
C10 CPU Usage by Natural Program	"C10 - CPU Usage by Natural Program" on page 123
W01 WAIT time by task/category	"W01 - WAIT time by task/category" on page 125
W02 WAIT time by module	"W02 - WAIT time by task/module" on page 130

<b>For information about ...</b>	<b>See ...</b>
W03 WAIT time referred attribution	"W03 - WAIT time referred attribution" on page 134
W04 WAIT time by task ENQ/RESERVE	"W04 - WAIT time by task ENQ/RESERVE" on page 137
W05 WAIT time by tape DDNAME	"W05 - WAIT time by tape DDNAME" on page 140
D01 DASD usage by device	"D01 - DASD usage by device" on page 142
D02 DASD usage by DDNAME	"D02 - DASD usage by DDNAME" on page 144
D03 DASD usage by data set	"D03 - DASD usage by data set" on page 147
D04 data set attributes	"D04 - Data set attributes" on page 149
D05 DASD EXCP summary	"D05 - DASD EXCP summary" on page 151
D06 DASD VSAM statistics	"D06 - DASD VSAM statistics" on page 154
D07 DASD activity timeline	"D07 - DASD activity timeline" on page 157
D08 DASD I/O wait time	"D08 - DASD I/O wait time" on page 159
D09 VSAM buffer pool usage	"D09 - VSAM buffer pool usage" on page 164
G01 Coupling facility summary	"G01 - Coupling facility summary" on page 165
G02 Coupling facility mean times	"G02 - Coupling facility mean times" on page 167
G03 Coupling facility total times	"G03 - Coupling facility total times" on page 168
K01 CPU SRB Usage by SRB Type	"K01- CPU SRB Usage by SRB Type" on page 169
K02 CPU SRB Usage by PSW/ObjCode	"K02- CPU SRB Usage by PSW/ObjCode" on page 174
V01 Measurement variance summary	"V01 - Measurement variance summary" on page 177
V02 CICS variance summary	"V02 - CICS variance summary" on page 180
V03 DB2 variance summary	"V03 - DB2 variance summary" on page 183
V04 IMS variance summary	"V04 - IMS variance summary" on page 187

---

## Performance analysis basics

Some of the concepts that you need to understand in order to effectively interpret the Application Performance Analyzer performance analysis reports are explained here.

### Sampling and system states

During an Application Performance Analyzer observation session, activity in the target address space is sampled at the frequency and for the duration which was specified when the session was requested. Each observation results in data being recorded which describes an observed System State. The essence of the analysis reports is the aggregation of System States and attribution of these aggregates to various System Objects. For example, CPU Executing is a type of System State and a Load Module is a type of System Object; a report might quantify observations of CPU Executing and attribute these quantities to various Load Modules. By

mapping observed system states to system objects, the analysis reports provide a meaningful picture of how resources are consumed.

## Types of system states

Each observation, or “sample,” interrupts and momentarily “freezes” system activity in the target address space. Information about the state of the interrupted process (or, often, in the case of a multi-CPU system, processes) is recorded.

System states that can be observed are:

- CPU Executing
- CPU Waiting
- Queued

It is important to understand that an observation session measures activity in a single address space. When we refer to system states like “CPU Waiting” or “CPU Unavailable” these states are with respect to the target address space only.

### CPU Executing

A CPU was executing machine instructions for the task when the observation was made. Information about where (in what program) execution was taking place is captured. Application Performance Analyzer also determines, and records, whether execution was in Linear or Parallel mode. Linear mode refers to a state in which one, and only one, task was executing instructions. Parallel mode refers to a state in which more than one task was executing concurrently. Parallel mode occurs when two or more CPUs were executing instructions for the target address space at the same time.

### CPU Waiting

A task was in a wait state. The task was waiting for an event (such as completion of an I/O operation) to occur.

### Queued

The “Queued” state refers to a task (TCB) that was observed as dispatchable but was not executing instructions because no CPU was available. A measurement showing a high percentage of queued observations could imply an overall shortage of CPU resources. This would also occur in an address space in which the number of dispatchable tasks exceeds the number of physical CPUs.

Unavailability of memory can also cause the Queued state.

## System objects

System Objects are objects to which quantified observations of systems states can be attributed. The following are the basic system objects:

- Load Modules
- TCBs
- DD Names
- DASD Volumes
- SVCs
- MQSeries Queue Names

## Quantities expressed as percentages

The performance analysis reports express most quantified data as percentages. In most cases, absolute values (for example, actual number of observations in which

execution was in DB2 services) would not, by themselves, be particularly meaningful. This is because the total number of samples chosen for an observation session is somewhat arbitrary. The percentage of activity attributed to a system object, on the other hand, provides a much better measure of the impact of that system object on performance. Furthermore, when expressed as percentages, quantification is likely to remain roughly equal if the sampling frequency and duration parameters are varied.

In order to effectively interpret the performance analysis reports it is important that you understand how these percentages are computed. The formulae vary depending upon what type of system activity is reported.

#### **CPU Time Percentage**

The percentage expresses the ratio of attributed CPU to the total CPU time observed. This is computed by dividing the number of attributed "CPU EXECUTING" observations by the total number of "CPU EXECUTING" observations and multiplying that number by 100.

Note that observations of CPU Waiting and CPU Unavailable are excluded from the calculation. The objective is to report the relative demand placed on CPU resources by system objects.

#### **I/O Activity Percentage of Time**

The percentage reported for I/O activity expresses the ratio of time attributed I/O operations were active to the total observation session elapsed time. Consider an example in which 10,000 observations were made during a 60 second interval. Suppose during 1,500 of these observations, I/O was found to be active for a file with DDNAME=SYSIN. 15 percent would be reported as the I/O activity percentage of time attributed to SYSIN.

#### **Parallel Activity**

Application Performance Analyzer will report information about parallel activity. Examples of parallel activity are:

I/O activity concurrent CPU execution is observed.

Concurrent I/O activity is observed for multiple devices.

Concurrent CPU execution is observed. This is only possible on a system with multiple CPUs (a multiprocessor).

## **Margin of error**

A margin of error value is displayed in various reports. The value is expressed as a percentage and represents a 95 percent confidence interval. What this means is that in 95 percent of cases (19 out of 20 times) a repetition of the same measurement will produce results within +/- the indicated number of percentage points. This value is based entirely on the size of a sample population and reflects only the statistical error that can be expected from the sample size. It does not take into account any effects caused by biased sample collection.

## **Color coding of graphs**

Application Performance Analyzer makes extensive use of bar graphs to illustrate resource usage. The graphs are color coded as follows:

*Table 1. Color coding of graphs*

<b>Graph Color</b>	<b>Purpose</b>
Green	CPU active



Table 1. Color coding of graphs (continued)

Graph Color	Purpose
Yellow	CPU wait
White	Resources (memory, dataspace)
Red	DASD I/O
Blue	Service time

**Note:** Report titles indicate each report's purpose. Color coding is included for emphasis, but color is not required to interpret information.

## Report categories and codes

Application Performance Analyzer reports are each assigned a three-character code consisting of a one-letter prefix followed by a two-digit number. The prefix indicates which category the report belongs to, and the number is a sequence number within that category.

When you are viewing a report, you can enter another report's three-character code on the command line and that report will also open.

The categories and reports are listed here:

Table 2. Report categories and prefixes

Prefix	Category	Reports
A	Admin/Miscellaneous	A01 Source Program Mapping A02 Request Printed Reports A03 Java Source Mapping A04 Source Mapping Dataset List A05 Source Mapping Common List
S	Statistics/Storage	S01 Measurement Profile S02 Load Module Attributes S03 Load Module Summary S04 TCB Summary S05 Memory Usage Timeline S06 Data Space Usage Timeline S07 TCB Execution Summary S08 Processor Utilization Summary S09 Measurement Analysis S10 Observation Session Messages
C	CPU usage analysis	C01 CPU Usage by Category C02 CPU Usage by Module C03 CPU Usage by Code Slice C04 CPU Usage by Timeline C05 CPU Usage Task/Category C06 CPU Usage Task/Module C07 CPU Usage by Procedure C08 CPU Usage Referred Attribution C09 CPU Usage by PSW/Object Code C10 CPU Usage by Natural Program

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
D	DASD I/O analysis	D01 DASD Usage by Device D02 DASD Usage by DDName D03 DASD Usage by data set D04 data set Attributes D05 DASD EXCP Summary D06 DASD VSAM Statistics D07 DASD Activity Timeline D08 DASD I/O Wait Time D09 VSAM Buffer Pool Usage
G	Coupling facility	G01 Coupling Facility Summary G02 Coupling Facility Mean Times G03 Coupling Facility Total Times
K	SRB measurement	K01 CPU SRB Usage by SRB Type K02 CPU SRB Usage by PSW/ObjCode
W	CPU WAIT analysis	W01 Wait Time by Category W02 Wait Time by Module W03 Wait Time Referred Attribution W04 Wait Time by task ENQ/RESERVE W05 Wait Time by Tape DDNAME
I	IMS measurement	I01 IMS Measurement Profile I02 IMS DL/I DL/I Call Timeline I03 IMS Transaction Timeline I04 IMS Txn Activity Timeline I05 IMS CPU Usage by PSB I06 IMS CPU Usage by Transaction I07 IMS CPU Usage by DL/I Call I08 IMS WAIT Time by PSB I09 IMS WAIT Time by Transaction I10 IMS WAIT Time by DL/I Call I11 IMS DL/I Activity by PSB I12 IMS DL/I Activity by Txn I13 IMS DL/I Activity by DL/I Call I14 IMS PSB/PCB Attributes I15 IMS DL/I Call Attributes I16 IMS Transaction Service Times I17 IMS Transaction DL/I Counts I18 IMS CPU/Svc Time by DL/I Call I19 IMS CPU/Svc Time by PSB I20 IMS CPU/Svc Time by Txn I21 IMS CPU/Svc Time by PCB I22 IMS Region Transaction Summary

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
E	CICS measurement	E01 CICS Session Statistics E02 CICS CPU and Use Counts by Pgm E03 CICS CPU Usage by Txn E04 CICS Mean Service Time by Txn E05 CICS Total Service Time by Txn E06 CICS Service Time by Task ID E07 CICS Wait by Txn E08 CICS mean service time by terminal ID E09 CICS total service time by terminal ID E10 CICS Mean Service Time by user ID E11 CICS Total Service Time by user ID E12 CICS CPU/Service Time by Txn
X	Multiple address space measurement	X01 CICS Mean Service Time by Txn X02 CICS Total Service Time by Txn X03 CICS Mean Service Time by Term X04 CICS Total Service Time by Term X05 Combined DB2 IMS MQ Timeline

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
F	DB2 measurement	F01 DB2 Measurement Profile F02 DB2 SQL Activity Timeline F03 DB2 SQL Activity by DBRM F04 DB2 SQL Activity by Statement F05 DB2 SQL Activity by Plan F06 DB2 SQL Statement Attributes F07 DB2 SQL Wait Time by DBRM F08 DB2 SQL Wait Time by Statement F09 DB2 SQL Wait Time by Plan F10 DB2 SQL CPU/Svc Time by DBRM F11 DB2 SQL CPU/Svc Time by Stmt F12 DB2 SQL CPU/Svc Time by Plan F13 DB2 SQL Threads Analysis F14 DB2 CPU Usage by Plan/Proc F15 DB2 SQL CPU/Svc Time by Rq Loc F16 DB2 SQL CPU/Svc Time by Enclave F17 DB2 SQL CPU/Svc Time by Corrid F18 DB2 SQL CPU/Svc Time by Wkstn F19 DB2 SQL CPU/Svc Time by EndUsr F20 DB2 Class 3 Wait Times
Q	MQSeries measurement	Q01 MQSeries Activity Summary Q02 MQSeries CPU Usage by Queue Q03 MQSeries CPU Usage by Request Q04 MQSeries CPU Usage by Txn Q05 MQSeries Serv Time by Queue Q06 MQSeries Serv Time by Request Q07 MQSeries Serv Time by Txn Q08 MQSeries Wait Time by Queue Q09 MQSeries Wait Time by Request Q10 MQSeries Wait Time by Txn Q11 MQ+ Activity Timeline Q12 MQ+ CPU/SVC Time by Queue Q13 MQ+ CPU/SVC Time by Request Q14 MQ+ CPU/SVC Time by Txn

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
J	Java Measurement	J01 Java summary and attributes J02 Java Heap usage timeline J03 Java CPU usage by thread J04 Java CPU usage by package J05 Java CPU usage by class J06 Java CPU usage by method J07 Java CPU usage by call path J09 Java service time by package J10 Java service time by class J11 Java service time by method J12 Java service time by call path J14 Java wait time by package J15 Java wait time by class J16 Java wait time by method J17 Java wait time by call path
V	Variance reports	V01 Measurement Variance Summary V02 CICS Variance Summary V03 DB2 Variance Summary V04 IMS Variance Summary
H	HFS Analysis	H01 HFS Service Time by Path Name H02 HFS Service Time by Device H03 HFS File Activity H04 HFS File Attributes H05 HFS Device Activity H06 HFS Device Attributes H07 HFS Activity Timeline H08 HFS Wait Time by Path Name H09 HFS Wait Time by Device H10 HFS Service Time by Request H11 HFS Wait Time by Request
B	WebSphere	B01 WAS Summary B02 WAS Activity B03 WAS Activity by Origin B04 WAS Activity by Servant B05 WAS EJB Activity B06 WAS EJB Activity by Origin B07 WAS EJB Activity by Servant B08 WAS Servlet/JSP Activity B09 WAS Servlet/JSP by Origin B10 WAS Servlet/JSP by Servant B11 WAS/CICS Calls B12 WAS/DB2 Calls B13 Async Work Requests B14 Async Work by Work Mgr B15 Async Work by Servant B16 WOLA Inbound Requests B17 WOLA Inbound by Origin B18 WOLA Inbound by Servant B19 WOLA Outbound Requests B20 WOLA Outbound by Register B21 WOLA Outbound by Servant

---

## S01 - Measurement profile

### Usage

Use this report to see a general overview of the measurement. This is a good report to examine first when analyzing a measurement. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. The first section of this report consists of a series of mini performance graphs illustrating various types of activity that was measured. This is followed by a section that reports measurement values.

### Performance graphs

These are histograms quantifying measurement data. To the right of each graph, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

### Overall CPU activity

This graph is omitted for DDF measurements.

Under heading	This is displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This number is sometimes slightly smaller than the total number of samples. Only those samples in which any TCBs existed are included in this count. Non-TCB samples can occur very early in a job step when the system is still initializing the step.
CPU Active	The number of samples the CPU was actively processing one or more TCBs. This value represents the percentage of time CPU activity was occurring in the address space.
WAIT	The number of samples all TCBs were in a WAIT.
Queued	The number of samples no CPU activity was taking place because no resources (CPU or memory) were available to service the address space. At least one TCB was dispatchable and not in a WAIT.

### CPU usage distribution

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the "samples" value reported in the "Overall CPU Activity" graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Application	The number of observations of CPU active TCBs while executing in application modules.

Under Heading	This is Displayed
System	The number of observations of CPU active TCBs while executing in system modules.
DB2 SQL	The number of observations of CPU active TCBs while servicing SQL requests.
Data Mgmt	The number of observations of CPU active TCBs while servicing data management requests.
Unresolved	The number of observations of CPU active TCBs while executing in addresses that could not be resolved to module names.
IMS DLI Call	The number of observations of CPU active TCBs while servicing IMS DLI requests.

## Most CPU active modules

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100% of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the 'samples' value reported in the 'Overall CPU Activity' graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Module	Five lines appear showing the five most CPU active load modules. The number of CPU active observations for each of these modules and its percentage of the total number of CPU active observations is shown.

## Most CPU active CSECTs

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100% of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the 'samples' value reported in the 'Overall CPU Activity' graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
CSECT	Five lines appear showing the five most CPU active CSECTs (control sections) and their corresponding module names. The number of CPU active observations for each of these CSECTs and its percentage of the total number of CPU active observations is shown.

## CPU modes

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the "samples" value reported in the "Overall CPU Activity" graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Supv Mode	The number of observations of CPU active TCBs while the system was in supervisor (privileged) mode (usually system routines).
Prob Mode	The number of observations of CPU active TCBs while the system was in problem state. Applications normally execute in problem state.
In SVC	The number of observations of CPU active TCBs while the system was executing in an SVC (supervisor call) routine.
AMODE 24	The number of observations of CPU active TCBs while the system was in 24 bit addressing mode.
AMODE 31	The number of observations of CPU active TCBs while the system was in 31 bit addressing mode.
AMODE 64	The number of observations of CPU active TCBs while the system was in 64 bit addressing mode.
User Key	The number of observations of CPU active TCBs while the system was in user storage key (key 8).
System Key	The number of observations of CPU active TCBs while the system was in a system storage protection key.

## Most active IMS PSBs

This graph is shown only if IMS measurement data was recorded. It shows the most active IMS PSBs. Up to five IMS PSBs are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS PSB Name	An IMS PSB name is shown and the number of samples in which processing of DLI calls under this PSB was observed. The percentage and the graph represent the proportion of the overall measurement time during which DLI calls were being serviced under this PSB.
Most Active DLI Calls	This graph is shown only if IMS measurement data was recorded. It shows the most active IMS DLI calls. Up to five DLI calls are reported.



## Most active DLI calls

This graph is shown only if IMS measurement data was recorded. It shows the most active IMS DLI calls. Up to five DLI calls are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DLI Call	A DLI call identified by three fields: a unique sequence number assigned to the DLI call; its DLI function code; and its PCB name. The percentage and the graph represent the proportion of samples in which processing of this DLI call was observed. The percentage and the graph represent the proportion of the overall measurement time during which all executions of this DLI call were being serviced.

## Most active DB2 plans

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 plan names. Up to five DB2 plans are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each Package or DBRM.
DB2 Package or DBRM Name	The number of samples SQL servicing was occurring against SQL statements defined in the indicated Package or DBRM.

## Most active packages/DBRMs

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 Packages/DBRMs. Up to 5 DB2 Package names or DBRM names are reported. A DBRM name is shown instead of a Package name in the event the DBRM was bound directly to the Plan instead of to a Package.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each Package or DBRM.
DB2 Package or DBRM Name	The number of samples SQL servicing was occurring against SQL statements defined in the indicated Package or DBRM.

## Most active SQL statements

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 SQL statements. Up to five SQL statements are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each SQL statement.
DBRM: Statement SQL Function	The number of samples SQL servicing was occurring for the indicated SQL statement. The DBRM name, the statement number and the type of SQL statement are shown.

## Measurement values

This section of the report shows various values relating to the measurement. These appear under the following categories:

- Request parameters
- Measurement environment
- Measurement statistics
- CPU consumption

## Request parameters

These values were established when the measurement was requested.

Under Heading	This is Displayed
Request number	The unique four-digit identifier assigned to the measurement.
Description	A description specified when the measurement was requested.
Sample File DSN	The data set name of the measurement file.
Retention	The date upon which the measurement file is to be deleted by Application Performance Analyzer.
Data extractors	The specified data extractors (DB2, CICS, etc.)
IMS Subsystem Id	The specified IMS subsystem Id. This field displays for IMS multiple address space requests only.
IMS Tran Code	The specified IMS transaction code. This field displays for IMS multiple address space requests and IMS single region requests.
IMS Program Name	The specified IMS program name. This field displays for IMS single region requests only.
IMS User Id	The specified IMS user Id. This field displays for IMS single region requests only.
Specific DB2 Parms	A 'P' is displayed when the request was specified for a DB2 Stored Procedure. An 'F' is displayed when the request was specified for a DB2 user-defined function. This field displays for DB2 multiple address space requests only.
DB2 Subsystem	The DB2 subsystem Id that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Schema	The schema name that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Name	The name that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Time of request	The time of day the request was made.

<b>Under Heading</b>	<b>This is Displayed</b>
Requesting user	The TSO user ID of the user that requested the measurement.
Date of request	The date upon which the request was made.
Job name	The name of the job that was specified to be measured.
Step name/number	The step name or step number that was specified to be measured, if applicable.
Step program	The name of the step program that was specified to be measured, if applicable.
Number of samples	The number of samples specified.
Duration	The specified measurement duration.
Active/pending	Indicates whether the measurement request specified an active job (an immediate measurement) or one that was to run later when execution of the job step is detected.
Proc step name	The procedure step name, if specified.
Delay time	The number of seconds specified for which the start of the measurement was to be delayed from the start of the job step.

## Measurement environment

Values relating to the environment in which the measurement took place are reported here.

<b>Under Heading</b>	<b>This is Displayed</b>
Job name	The name of the measured job.
Job number	The job number of the measured job assigned by JES.
Step name	The name of the measured step.
ASID	The ASID (address space ID) of the measured job.
DB2 attach type	The type of DB2 attachment, if DB2 data recorded.
Region size <16MB	The region size in the 24 bit address range.
Region size >16mb	The region size above the 24 bit address range.
Step program	The name of the measurement step program (specified in the EXEC JCL statement).
Region type	The type of region (Batch, TSO, IMS, CICS, etc.) measured.
System ID	The system identifier of the system on which the measurement took place.
SMFID	The SMF ID assigned to the system on which the measurement took place.
O/S Level	The operating system and level.
APA vers.	The version of Application Performance Analyzer that performed the measurement.
IBM APA APAR	The APAR number of Application Performance Analyzer started task that was active when this measurement was performed.
General CPUs	The number of CPUs in the system on which the measurement took place. This does not include specialty CPUs.
Specialty CPUs	The number of specialty CPUs in the system on which the measurement took place.
CPU rate factor	The factor used to determine CPU performance.

Under Heading	This is Displayed
MIPS per CPU	The speed, in machine instructions per second, of one CPU. This is derived using the CPU rate factor.
CPU model	The CPU model number.
SUs per second	The number of service units per CPU second.

## Measurement statistics

Under Heading	This is Displayed
Start time	The time at which the measurement was initiated.
End time	The time at which the measurement ended.
Start date	The date upon which the measurement was initiated.
End date	The date upon which the measurement ended.
Total samples	The total number of samples taken during the measurement.
Sampling rate	The overall sampling rate expressed in samples per second.
CPU/WAIT samples	The number of samples in which CPU activity was observed or all TCBs were in wait state. Excluded from this count are samples in which no CPU activity was observed and one or more TCBs were dispatchable.
TCB samples	The number of samples in which TCBs existed. This number might be slightly smaller than the total number of samples. This occurs when some samples were taken at the beginning of a job step before the step initialization had completed.
Overall CPU	The average system CPU utilization percentage during the measurement period. It is obtained from the field CCVUTILP, which is the system CPU utilization as viewed by the System Resource Manager (SRM). Thus, it is the CPU utilization for this z/OS image.
Overall zAAP CPU	The average CPU Utilization percentage for the zAAP processor(s) during the measurement period. It is obtained from field, CCVUTILI, which is the zAAP CPU Utilization as viewed by the System Resource Manager (SRM).
Overall zIIP CPU	The average CPU Utilization percentage for the zIIP processor(s) during the measurement period. It is obtained from field, CCVUTILS, which is the zIIP CPU Utilization as viewed by the System Resource Manager(SRM). When the processor has the zAAP on zIIP feature, zAAP time will also show in this field.
Duration	The duration of the measurement in minutes and seconds.
Report dataspace	The size of the dataspace used to load the sample file and create indexes for reporting. This field is reported in megabytes.
Sample dataspace	The size of the dataspace used to record measurement data while sampling. This is the total uncompressed size reported in megabytes.
Meas significance	The ratio of the number of CPU/WAIT samples to the number of TCB samples. This is a measure of the quality of the measurement data. A low value indicates that CPU resources were unavailable to service the job step.
CPU queued samples	The number of samples in which no activity was occurring in the address space due to the unavailability of CPU resources.

Under Heading	This is Displayed
Pages in	The number of page-in operations that occurred during the measurement interval.
Pages out	The number of page-out operations that occurred during the measurement interval.
EXCPs	The number of EXCPs processed during the measurement interval.

## CPU consumption

This section is omitted for DDF measurements.

Under Heading	This is Displayed
CPU active samples	The number of samples in which CPU activity (one or more CPUs) was observed.
CPU active time	The percentage of the measurement interval CPU activity was observed.
CPU wait samples	The number of samples in which all TCBs were in wait state.
CPU wait time	The percentage of the measurement interval all TCBs were in wait state.
CPU time TCB	The number of CPU seconds consumed in TCB mode during the measurement interval.
CPU time SRB	The number of CPU seconds consumed in SRB mode during the measurement interval. This does not include any SRB time consumed by the Application Performance Analyzer measurement task.
Service units	The number of service units based on the CPU TCB and CPU SRB consumption.
Measurement SRB	The number of CPU seconds in SRB mode consumed by the Application Performance Analyzer measurement task in the measured address space.

## zAAP CPU consumption

This section is displayed when zAAP time has been recorded. This is also displayed for zAAP on zIIP time, which will be labeled as zAAP time.

Under Heading	This is Displayed
zAAP CPU time	The number of CPU seconds consumed on zAAP processors during the measurement interval.
Task Time on CP	The number of CPU seconds consumed on a standard processor for non-zAAP eligible work.
Normalized Time	The zAAP CPU time displayed as a normalized CPU time.
zAAP Time on CP	The number of CPU seconds consumed on a standard processor for zAAP eligible work.

Under Heading	This is Displayed
Norm. Factor	The normalization factor is used to express zAAP CPU time in the time a regular CP would have used for the same work. Multiply the zAAP CPU time by this number, then divide by 256.
Enclave CPU time	The number of CPU seconds that was accumulated in a WLM enclave. An enclave is defined as a construct that can span multiple dispatchable units (service request blocks and tasks) in multiple address spaces, allowing them to be reported on and managed by WLM as part of a single work request.

## DDF CPU consumption

This section is shown for DDF measurements only.

Under Heading	This is Displayed
Task CPU time	The number of seconds of CPU time used by the enclave SRB dispatchable unit for all measured DDF SQL calls.
Enclave CPU time	The number of seconds of CPU time used by all dispatchable units in an enclave for all measured DDF SQL calls.
zIIP time	The number of seconds of zIIP time used by all measured DDF SQL calls.
zIIP on CP time	The number of seconds of CPU time on a standard processor for zIIP-eligible work used by all measured DDF SQL calls.

## Client enclave consumption

This section is shown for DB2 parallel queries only.

Under Heading	This is Displayed
Client SRB time	The number of seconds of CPU time used by the enclave SRB dispatchable unit for all measured DB2 parallel queries.
Total TCB time	The sum of CPU time in seconds used by client SRB enclaves and TCB CPU time.

## Sample reports

A sample report is shown here, it is divided into three segments as it is scrolled down.

```

File View Navigate Help
-----
S01: Measurement Profile (9263/DSN1WLM)                               Row 00001 of 00119
Command ==> _____ Scroll ==> CSR

+Overall CPU Activity -----+
| Samples      379 100.0% ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' | +Reports: -----+
| CPU Active   341  89.9% ===== | | C01 C02 C03 C05 | | | | | | | | |
| WAIT         4   1.0% = | | C07 W01 W02   |
| Queued       34   8.9% = | | | | | | | | | | |
+-----+

+CPU Usage Distribution -----+
| CPU Active   432 100.0% ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' | +Reports: -----+
| Application    3   0.6% = | | C01 C05 C08 W01 | | | | | | | | |
| System        130 30.0% ===== | | | | | | | | | | |
| DB2 SQL       299 69.2% ===== | | | | | | | | | | |
| Data Mgmt      0   0.0% | | | | | | | | | | |
| Unresolved     0   0.0% | | | | | | | | | | |
| IMS DLI Call   0   0.0% | | | | | | | | | | |
+-----+

+Most CPU Active Modules-----+
| CPU Active   432 100.0% ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' | +Reports: -----+
| DSNIDM       154 35.6% ===== | | C02 | | | | | | | | |
| CAZ00681     82 18.9% === | | | | | | | | | | |
| DSNXGRDS     58 13.4% == | | | | | | | | | | |
| DSNK2DM      34   7.8% = | | | | | | | | | | |
| DSNBBM       21   4.8% = | | | | | | | | | | |
+-----+

+Most CPU Active CSECTs-----+
| CPU Active   432 100.0% ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' | +Reports: -----+
| DSNISFX2 in DSNIDM 147 34.0% ===== | | C02 | | | | | | | | |
| CAZ00681       82 18.9% === | | | | | | | | | | |
| CAZ00670       18  4.1% = | | | | | | | | | | |
| DSNXRSE in DSNXGRDS 15  3.4% = | | | | | | | | | | |
| DSNB1GET in DSNBBM 15  3.4% = | | | | | | | | | | |
+-----+

```

Scrolling down, sample report S01 continued:





```

File View Navigate Help
-----
S01: Measurement Profile (9263/DSN1WLM)                               Row 00069 of 00119
Command ==>>> _____ Scroll ==>>> CSR
+Request parameters-----+
| Request number      9263
| Description         v8 db2+
| Sample file DSN    BNPF.SST.AVP03.R9263.RUNPGM81.SF
| Retention          Mon Jan-14-2008
| Data Extractors    DB2,DB2+
|-----|-----|
| Requesting user    AVP03
| Time of request    14:25:50
| Date of request    Wed Jul-18-2007
| Job name           DSN1WLM
| Step name/number   n/a
| Step program       n/a
| Nbr of samples     100
| Duration           1 sec
| Active/pending     Pending
| Proc step name     n/a
| Delay time         none
|-----+-----+
+Measurement environment-----+
| Job name           DSN1WLM
| Job number         JOB02411
| Step name          DB21
| Proc step name     DB2PGM8
| ASID              36
| Region size <16MB  6,208K
| Region size >16MB  32,768K
| Step program       DB2PGM8
| Region type        Batch
| DB2 Attach type    RRSAF
|-----|-----|
| System ID          X235
| SMFID              X235
| O/S level          z/OS 01.08.00
| IBM APA Version    2.400A
|-----|-----|
| Nbr of CPUs        3
| CPU rate factor    7,321
| MIPS per CPU       45
| CPU model          2096
| CPU version        00
| SUs per second     2185.4
|-----+-----+

```

Scrolling down, sample report S01 continued:

```

File View Navigate Help
-----
S01: Measurement Profile (9263/DSN1WLM)                               Row 00100 of 00119
Command ==>>> _____ Scroll ==>>> CSR
+Measurement statistics-----+
| Start time         14:26:01
| End time           14:26:05
| Start date         Wed Jul-18-2007
| End date           Wed Jul-18-2007
|-----|-----|
| Total samples      381
| Sampling rate      98.44 per sec
| CPU/WAIT samples   345
| TCB samples        379
| Overall CPU        64.49%
| Duration           3.87 sec
| Report dataspace   0.16MB
| Sample dataspace   1.63MB
| Meas significance  91.02%
| CPU queued samples 34
|-----|-----|
| Pages in           0
| Pages out          0
| EXCPs              34
|-----+-----+
+CPU consumption-----+
| CPU active samples 341
| CPU active time    89.97%
| CPU WAIT samples   4
| CPU WAIT time      1.05%
| CPU time TCB       4.98 sec
| CPU time SRB       0.02 sec
| Service Units      10,927
| Measurement SRB    0.35 sec
|-----+-----+

```

## S02 - Load module attributes

This report lists information about each of the load modules for which activity was measured during the observation session. Various attributes of each of the modules are reported.



Use these options to trim down your report by omitting information that you are not interested in. You can omit ESD information, Nucleus modules, PLPA Modules, or modules that have been reloaded at a new address but have the same name and size.

## S03 - Load module summary

This report lists the load modules for which activity was measured during the observation session. For further details about a particular module, enter the “++” line command.

A sample report is shown here:

```

File View Navigate Help
-----
S03: Load Module Summary (2133/TSTJOB1)                               Row 00001 of 00124
Command ==>> _____ Scroll ==>> PAGE

Module  Locn  Address  Count  Size(bytes)  Attributes  DDName  Load Library
CEEBCINIT  JPA  0000B088  1      61,304      RU RN      -VLF-
CEEPLPKA  PLPA  043C3000  1     1,967,824
COFMMTGR  NUC  012D2D10  1         752
COFMSCHK  PLPA  03D0B3D8  1         3,112
CSVEXPR   PLPA  0296C000  1     31,448
CSVGETMD  NUC  010FF180  1     17,544
CSVLLSCH  NUC  010DAE40  1         1,848
CSVLLTCH  NUC  010D82E0  1         8,232
CSVSYNCH  NUC  012F8CA0  1         1,936
CSVXLOAD  NUC  012FD0C0  1         2,448
CTXRSMGR  NUC  0130BF68  1         9,024
IAXGT     NUC  016B7370  1         7,512
IAXPI     NUC  017378D8  1         2,976
IAXPN     NUC  0173E958  1         3,752
IAXPQ     NUC  01744310  1         7,168
IAXPS     NUC  00FFE3F0  1         6,224
IAXVF     NUC  017C4AD0  1     14,320

```

## Detail line descriptions

Each line reports values under the following headings:

- Module
- Locn
- Address
- Count
- Size(bytes)
- Attributes
- DDName
- Load Library

### Module

This is the module name.

### Location

This is the location where the module was loaded — JPA, PLPA, or NUCLEUS. JPA is displayed in green. All other locations are displayed in red.

### Address

This is the address where the module was loaded. If it is below the line, it is displayed in yellow, above the line addresses are displayed in green.

**Count**

The number of unique instances of the load module observed at the indicated address. This value exceeds 1 if the module was loaded, deleted and then loaded again. A high value could indicate the module was loaded (and deleted) excessively and could be causing a performance problem.

**Size** This is the size of the module in bytes.

**Attributes**

This is the attributes of the module – RU=reusable, RN=reentrant, APF=APF-authorized.

**DDName**

This is the DDName of the load library from which the module was loaded.

**Load Library**

This is the data set name of the load library from which the module was loaded.

**Line commands**

The line commands available in this report, and the objects and headings to which they apply, are summarized here:

**on objects**

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
++	Load Module	Show additional details.

**on headings**

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
SN	Module	Sort report by module name.
SS	Module	Sort report by module size.
SA	Module	Sort report by module load address.
SL	Module	Sort report by module load library

**SETUP options**

The following SETUP option can be selected with the SETUP primary command:

**Combine repeating entries in report**

You can choose to combine repeating entries in the report. When selected, entries whose module name or path name, address and size are identical will be combined into one entry. The count field is updated to reflect the true number of such entries sampled.

**Detail window**

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
-----
Module Information for IGG0191A
Load Address      00D89000 to 00D8CE7F
Module Size       16,000
Attributes        NOREUS,NORENT
Module Location   PLPA
Program Group     MVS System
Subgroup          MVS Services
Function          Data Management services

ESD Information for IGG0191A
External  Offset  Length  Start Addr  End Addr
IGG0191A 000000   2292   00D89000   00D898F3
IGG0196I 0008F8    932   00D898F8   00D89C9B
IGG0196A 000CA0   1186   00D89CA0   00D8A141
IGG0196Q 001148   1984   00D8A148   00D8A907
IGG0191N 001908   2700   00D8A908   00D8B393
IGG0191Y 002398    668   00D8B398   00D8B633
IGG0191B 002638   3254   00D8B638   00D8C2ED
IGG0196B 0032F0   1040   00D8C2F0   00D8C6FF
IGG0191I 003700   1352   00D8C700   00D8CC47
IGG0193I 003C58    564   00D8CC48   00D8CE7B

```

## S04 - TCB summary

### Overview

A list of all TCBs (Tasks) which were active at any time during the observation session is reported. The list is arranged in hierarchical sequence with ATTACHED subtasks indented relative to the parent tasks that performed the ATTACH functions.

A sample TCB Summary report is shown here:

```

File View Navigate Help
-----
S04: TCB Summary (0756/TSTJOB1)                               Row 00001 of 00005
Command ==> _____ Scroll ==> CSR
TCB_Name                Address  Samples  CPU Active  CPU WAIT  Queued
IEAVAR00-002            8FE0A8      0
> IEAVTSDT-003          8FFE88      0
> IEESB605-004          8FFBF8      0
  > IEFIIC-005           8FB7F0      0
    > LPFRAYV4-001       8FB330    3996    75.75%    8.23%   16.01%

```

### Detail line descriptions

Each line reports values under the following headings.

- TCB Name
- Address
- Samples
- CPU Active
- CPU WAIT
- Queued

### TCB Name

This is the name of the program associated with the task; the one specified to the ATTACH function. An index value is also appended to the name. This is a sequence number that Application Performance Analyzer assigned to each unique TCB that it observed. The value is useful for distinguishing between more than one TCB with the same name (same program ATTACHed).

For CICS measurements that have the CICS data extractor selected, the TCB mode will be displayed for CICS TCBs. This will immediately follow the TCB name.

### Address

This is the address of the TCB. Only 6 hexadecimal digits are shown as TCBs always reside below the 16MB line.

### Samples

This is the number of samples in which the TCB was observed.

### CPU Active

This is the number of samples in which the CPU was active (instruction execution was in progress) in this TCB.

### CPU WAIT

This is the number of samples in which the Task was waiting.

### Queued

This is the number of samples in which the TCB was observed in Queued status; it was ready to execute but no CPU was available.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	TCB Name	Display context help information.
++	TCB Name	Show additional details.
C01	TCB Name	Display C01 report subset.
C02	TCB Name	Display C02 report subset.
C03	TCB Name	Display C03 report subset.

This report does not have any line commands on headings.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > LPFRAYV4-001          8FB330    3996    75.75%    8.23% 1 |
+-----+

TCB Information for LPFRAYV4-001

Nbr of Samples          3996
Active CPU Samples      3027  =====
WAIT Samples           329   ==
Queued CPU Samples      640   =====

Session CPU Time        17.778 seconds
Accumulated CPU Time    17.778 seconds
Task ATTACHED by        IEFIIC-005
Time to ATTACH           *UNKNOWN*

```

## S05 - Memory usage timeline

### Overview

This timeline analysis breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive resource usage trends. The value under the heading Storage quantify the number of Page Frames, which were allocated to the address space during the interval.

A sample Memory Usage Timeline report is shown here:

```

File View Navigate Help
-----
S05: Memory Usage Timeline (0644/TSTJOB1)                Row 00001 of 00015
Command ==> _____ Scroll ==> CSR
-----
SEQN   Seconds  Storage <----1380K-----2530K-->
*.....+.....+.....+.....+.....+.....+.....+.....+.....+.....+.....*
0001   0.069   1548K  =====
0002   0.205   1660K  =====
0003   0.256   2040K  =====
0004   0.180   2040K  =====
0005   0.184   2040K  =====
0006   0.209   2104K  =====
0007   0.201   2144K  =====
0008   0.205   2188K  =====
0009   0.205   2280K  =====
0010   0.209   2380K  =====
0011   0.227   2404K  =====
0012   0.201   2432K  =====
0013   0.193   2408K  =====
0014   0.214   2176K  =====
0015   0.111   1556K  =====

```

### Detail line descriptions

Each line reports values under the following headings:

- SEQN
- Seconds
- Storage

**SEQN** This is the sequence number of the interval. Intervals are numbered 0001, 0002, etc.

**Seconds**

This is the duration of the interval in seconds.

**Storage**

This is the amount of central storage allocated to the address space. In other words, Real Storage (or “Page Frames”). This is an effective measurement of the address space’s demand on central storage. The value is expressed in units of kilobytes (1024 bytes). Each line shows the maximum value observed during the particular interval. These page frames include paged-in storage for conventional allocations (for example, obtained by GETMAIN) as well as Dataspaces and Hiperspaces.

**Line commands**

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

**on objects**

Cmd	When Applied To Object	Action
?	SEQN (sampling interval)	Display context help information.
++	SEQN (sampling interval)	Show additional details.
C01	SEQN (sampling interval)	Display C01 report subset.
C02	SEQN (sampling interval)	Display C02 report subset.
C03	SEQN (sampling interval)	Display C03 report subset.

This report does not have any line commands on headings.

**SETUP options**

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
-----+-----
S | Options for Memory Usage Timeline | 001 of 00015
C |                                     |    ==> CSR
S | Number of Intervals . . . . . 15 |
S | This is the number of equal time intervals within |
0 | the duration of the measurement that are to be |
0 | reported. Each report line will show measurement |
0 | information for one interval. |
0 | |
+-----+-----

```

**Number of Intervals**

Use this option to change the number of equal time intervals that are reported.





## on objects

Cmd	When Applied To Object	Action
?	SEQN (sampling interval)	Display context help information.
++	SEQN (sampling interval)	Show additional details.
C01	SEQN (sampling interval)	Display C01 report subset.
C02	SEQN (sampling interval)	Display C02 report subset.
C03	SEQN (sampling interval)	Display C03 report subset.

This report does not have any line commands on headings.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
-----+-----
S | Options for Data Space Usage Timeline | 001 of 00015
C |                                     | ==> CSR
S | Number of Intervals . . . . . 15 |
  | This is the number of equal time intervals within |
  | the duration of the measurement that are to be |
  | reported. Each report line will show measurement |
  | information for one interval. |
0 |                                     |
0 |                                     |
0 |                                     |
+-----+-----
```

### Number of Intervals

Use this option to change the number of equal time intervals that are reported.

---

## S07 - TCB execution summary

### Overview

A list of all TCBs (Tasks) which were active at any time during the observation session is reported. The list is arranged in hierarchical sequence with ATTACHED subtasks indented relative to the parent tasks that performed the ATTACH functions.

A sample screen is shown here:

```

File View Navigate Help
-----
S07: TCB Execution Summary (0656/TSTJOB1) Row 00001 of 00019
Command ==>> _____ Scroll ==>> CSR

TCB_Name          --- CPU Time ---
                   Measured TCBTotal <-- Measurement Interval --->
IEAVAR00-001      0.0 Sec 2.3 Sec System TCB - Not Measured
> IEAVTSDT-002    0.0 Sec 0.0 Sec System TCB - Not Measured
> IEESB605-003    0.0 Sec 1.2 Sec System TCB - Not Measured
  > IKJEFT01-004   0.0 Sec 0.3 Sec =====
    > IKJEFT02-005 0.0 Sec 0.4 Sec =====
      > IKJEFT09-006 0.0 Sec 0.0 Sec =====
        > ISPF-007   0.9 Sec 32.3 Sec =====
          > ISPTASK-008 0.0 Sec 8.5 Sec =====
            > ISPTASK-009 8.2 Sec 21.0 Sec =====
              > EX-010 0.1 Sec 0.3 Sec =====
                > ALTLIB-015 0.0 Sec 0.0 Sec =
                  > FREE-016 0.0 Sec 0.0 Sec =
                    > CALL-011 0.1 Sec 0.2 Sec =====
                      > PMSSEL-12 3.9 Sec 42.3 Sec =====
                        > EXEC-013 0.1 Sec 0.8 Sec =
                          > CALL-014 0.0 Sec 0.2 Sec =
                            > ALLOC-017 0.1 Sec 0.1 Sec =
                              > ALLOC-018 0.1 Sec 0.1 Sec =
                                > ALLOC-019 0.1 Sec 0.1 Sec =

```

## Detail line descriptions

Each line represents reports values under the following headings:

- TCB Name
- CPU Time – Measured
- CPU Time – TCBTotal
- Measurement Interval

### TCB Name

This is the name of the program associated with the task; the one specified to the ATTACH function. An index value is also appended to the name. This is a sequence number that Application Performance Analyzer assigned to each unique TCB that it observed. The value is useful for distinguishing between more than one TCB with the same name (same program ATTACHed).

For CICS measurements that have the CICS data extractor selected, the TCB mode will be displayed for CICS TCBs. This will immediately follow the TCB name.

### CPU Time – Measured

This reports the amount of CPU time used by the Task for the duration of the observation session. This is accurate to within the span of two sample intervals.

### CPU Time – TCBTotal

This reports the amount of accumulated CPU time used by the Task since the Task was started up to the time of the end of the observation session. This is accurate to within one sample interval.

### Measurement Interval

A graph is plotted here showing the span of time within the observation session interval the Task was active.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	TCB Name	Display context help information.
++	TCB Name	Show additional details.
C01	TCB Name	Display C01 report subset.
C02	TCB Name	Display C02 report subset.
C03	TCB Name	Display C03 report subset.

---

## S08 - Processor utilization summary

### Usage

Use this report to see a breakdown of CPU states observed during the measurement.

### Quantification

Each detail line reports the number of active CPU samples for an indicated CPU state. This is also expressed as a percentage of the total number of active CPU samples.

The CPU states are not all mutually exclusive. Overlaps in the counts reported in different detail lines will occur.

Under Heading	This is Displayed
Storage key n	The number of active CPU samples in the indicated storage protect key. A value of 8 indicates user (application) key. Other values usually indicate execution is in a system routine.
Problem state	The number of active CPU samples in problem state. This is the usual state for application programs.
Supervisor state	The number of active CPU samples in supervisor state. This mode allows execution of privileged instructions. This typically indicates execution in an operating system routine.
Execution in SVC	The number of active CPU samples while executing in SVC (Supervisor Call) modules.
Execution in real mode	The number of active CPU samples in real mode. There are no normal operating conditions under which this mode can occur. The value should always be zero indicating execution in virtual mode.
Primary-space mode	The number of active CPU samples in which the ASC (Address-Space Control) bits indicate execution in primary-space mode.
Access-register mode	The number of active CPU samples in which the ASC (Address-Space Control) bits indicate execution in Access-register (AR) mode.

<b>Under Heading</b>	<b>This is Displayed</b>
Secondary-space mode	The number of active CPU samples in which the ASC (Address-Space Control) bits indicate execution in secondary-space mode.
Home-space mode	The number of active CPU samples in which the ASC (Address-Space Control) bits indicate execution in home-space mode.
Execution on processor n	The number of active CPU samples in which instructions were being executed by the indicated processor. Processors in a multi-CPU system are numbered 0,1,2,3 ... etc. Specialty processors such as zAAP are identified to the right of the processor percentage.
In private storage ABOVE	The number of active CPU samples in which instructions were located in private storage above the 16MB boundary.
In private storage BELOW	The number of active CPU samples in which instructions were located in private storage below the 16MB boundary.
In common storage ABOVE	The number of active CPU samples in which instructions were located in common storage above the 16MB boundary.
In common storage BELOW	The number of active CPU samples in which instructions were located in common storage below the 16MB boundary.
Execution in AMODE 24	The number of active CPU samples in which instructions were being executed in AMODE 24.
Execution in AMODE 31	The number of active CPU samples in which instructions were being executed in AMODE 31.
Execution in AMODE 64	The number of active CPU samples in which instructions were being executed in AMODE 64.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
S08: Processor Utilitization Summary (0652/TSTJOB1) Row 00001 of 00031
Command ==> _____ Scroll ==> CSR

Processor states for 6879 CPU usage measurements
```

<u>Processor State</u>	<u>Nbr of Samples</u>	<u>Percentage</u>
Storage key 0	2,884	41.92%
Storage key 1	347	5.04%
Storage key 5	193	2.80%
Storage key 7	4	0.05%
Storage key 8	3,451	50.16%
Problem state	3,357	48.80%
Supervisor state	3,522	51.19%
Execution in SVC	3,501	50.89%
Execution in real-mode	0	0.00%
Primary-space mode	6,879	100.00%
Access-register mode	0	0.00%
Secondary-sapce mode	0	0.00%
Home-space mode	0	0.00%
Execution on processor 0	3,660	53.20%
Execution on processor 1	3,219	46.79%
In private storage	1,366	19.85%
In private storage BELOW	120	1.74%
In common storage	2,837	41.24%
In common storage BELOW	2,556	37.15%
Execution in AMODE 24	0	0.00%
Execution in AMODE 31	1	100.00%
Execution in AMODE 64	0	0.00%

---

## S09 - Measurement analysis

### Usage

This report presents various textual statements, each representing an observation made about some aspect of execution of the measured job. The purpose of each of these observations is to provide a synoptic analysis of an area of resource usage and, in some cases, suggest where some performance improvement opportunities might exist.

It is important that you analyze these observations in the context of how you would expect the measured job to perform. Some of the statements in this report might draw your attention to aspects of resource consumption that is perfectly normal for the job. For example, high CPU consumption might be noted in a certain module in a situation where you would actually expect high CPU usage in that module.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
S09: Measurement Analysis (9458/TSTJOB1) Row 00001 of 00031
Command ==> _____ Scroll ==> CSR

This report presents various textual statements pertaining to specific
aspects of application performance observed during the measurement
session. Each statement identifies areas of activity and resource
consumption or causes of execution delay and suggests areas where
performance improvement opportunities might exist.

+-----+
| 1. Small CPU sample size |
| This measurement recorded a relatively small number of active CPU |
| observations. Some figures shown in CPU usage reports may have a high |
| margin of error. Keep this in mind when analyzing these reports. |
+-----+

+-----+
| 2. System CPU overhead |
| A high percentage of CPU activity was observed in system service |
| routines. This indicates high system overhead. The level of system |
| overhead might be normal for the type of job being measured or it might |
| be an indication of a performance problem. |
+-----+

See reports: C01 C02
+-----+
```

---

## S10 - Observation Session Messages

### Usage

Use this report to display messages that are issued on behalf of the observation session. These include error, warning, informational, and diagnostic messages.

The report consists of three levels: Category, Message ID, and Message Text. The Category and Message ID levels may be expanded or contracted by using the '+' and '-' line commands respectively.

Expanding the category level exposes the Message ID information for each message issued under that category.

Expanding a Message ID level, exposes the message text associated with that message ID. The message text may be displayed in one of four colors:

- Red for Severe and Error level messages
- Yellow for Warning level messages
- Turquoise for Informational level messages
- Blue for Diagnostic level messages

Diagnostic level messages are only issued when the FreezeFrame started task is configured with DiagLevel of five or higher.

Entering the '+' or '-' line command on the Name title will expand or contract all entries at all levels of the report.

## Category Descriptions

The messages are grouped by the following categories:

- REQ - Sampling Request Messages. This category contains all messages issued before sampling starts and while sampling is underway for the request. These messages provide information on the status of the observation session.
- DATW - DataWriter Messages. This category provides status and exception information on the allocation and creation of the observation data set.
- ESDE - External Symbol Dictionary Extractor Messages. This category contains all messages issued by the External Symbol Dictionary Extractor. These messages provide status and exception information on the retrieval of External Symbol Dictionary data for observed modules.
- HVXT - DB2 Host Variable Extractor Messages. This category contains all messages issued by the DB2 Host Variable Extractor. These messages report status and exception information related to the resolution of DB2 host variable names from the corresponding :H host variable markers found in SQL statements that were observed during sampling. This category of messages will only be present if the DB2V extractor has been selected when the observation request was created.
- Other - Non-categorized Messages. This category contains all messages that do not fall under any of the above categories.

## SETUP options

Enter the SETUP primary command to select options for this report. The following popup will be displayed:

```
+-----+
| S10 - Report SETUP Window |
| Options for Observation Session Messages |
|                               |
| Enter "/" to select an option |
| / Display messages with a message level of S'or'E' |
| - Display messages with a message level of W' |
| / Display messages with a message level of I' |
| - Display messages with a message level of D' |
+-----+
```

### Display messages with a message level of 'S' or 'E'

Use this option to display severe level and error level messages.

### Display messages with a message level of 'W'

Use this option to display warning level messages.

### Display messages with a message level of 'I'

Use this option to display informational level messages.

### Display messages with a message level of 'D'

Use this option to display diagnostic level messages.

---

## C01 - CPU usage by category

### Overview

This report analyzes measured CPU consumption. It attributes CPU consumption to the following general categories:

- APPLCN – Application Code



- SYSTEM – System/OS Services
- DB2SQL – SQL Processing
- DATAMG – Data Management (DASD) Requests
- IMSDLI – IMS DL/I call processing
- ADABAS – Adabas requests

In addition, any execution measured at locations for which no load module name could be determined is attributed to a category:

- NOSYMB – No Module Name Found

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy is visible. To expand any of these categories to show the next hierarchical level, you can type the “+” line command on the detail line. You can also enter the “+” line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJOB01)			Row 00001 of 00004
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±1.8%
		*...1...2...3...4...5...6...7...8	
APPLCN	Application Code	54.36	=====
SYSTEM	System/OS Services	44.30	=====
DATAMG	Data Mgmt Processing	1.03	=
NOSYMB	No Module Name	0.29	

## Detail line descriptions

Each line represents a System Object – an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

### Category

Category is the top level in the hierarchy. CPU consumption is categorized as APPLCN, SYSTEM, DB2SQL, DATAMG, IMSDLI, ADABAS or NOSYMB.

### DPA Group

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, MVS™, SVC, etc.

By entering a '+' on the SYSTEM category line:

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJOB01)			Row 00001 of 00004
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±1.8%
		*...1...2...3...4...5...6...7...8	
APPLCN	Application Code	54.36	=====
+SYSTEM	System/OS Services	44.30	=====
DATAMG	Data Mgmt Processing	1.03	=
NOSYMB	No Module Name	0.29	

The list of objects in this category is expanded to the next level of the hierarchy to include DPA groups:

```

File View Navigate Help
-----
C01: CPU Usage by Category (0638/TSTJOB01) Row 00001 of 00009
Command ==> Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±1.8%
          *...1...2...3...4...5...6...7...8
APPLCN    Application Code  54.36 =====
SYSTEM    System/OS Services 44.30 =====
→ SVC     SVC Routines      42.14 =====
→ MVS     MVS System        2.06 ==
→ NUCLEUS Nucleus Modules   0.06
→ IMS     IMS Subsystem     0.03

DATAMG    Data Mgmt Processing 1.03 ==
NOSYMB    No Module Name     0.29

```

**Note:** Using the SETUP primary command, you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group.

In this sample screen Subgroup has been selected in SETUP, note that the SVC group has now been replaced with SVC subgroups (a subgroup for each SVC type.)

```

File View Navigate Help
-----
C01: CPU Usage by Category (0638/TSTJOB01) Row 00001 of 00012
Command ==> Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±1.8%
          *...1...2...3...4...5...6...7...8
APPLCN    Application Code  54.36 =====
SYSTEM    System/OS Services 44.30 =====
→ SVCTYPE1 Type 1 System SVC  18.94 =====
→ SVCTYPE3 Type 3 System SVC  10.38 =====
→ SVCTYPE4 Type 4 System SVC   8.72 =====
→ SVCTYPE2 Type 2 System SVC   4.09 =====
→ MVS     MVS System        2.06 =
→ NUCLEUS Nucleus Modules   0.06
→ IMS     IMS Subsystem     0.03

DATAMG    Data Mgmt Processing 1.03 =
NOSYMB    No Module Name     0.29

```

**Name Column**

The symbolic name of the Group/Subgroup appears under this heading.

**Description Column**

A Group/Subgroup description appears under this heading.

**CPU Percent Column**

The aggregation of activity measured under the named Group/Subgroup appears under this heading as a percentage of CPU time.

**Load Module**

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

For example, to see the load modules under the Group/Subgroup line CICS, enter + on the CICS object:

```

File View Navigate Help
-----
C01: CPU Usage by Category (0621/TSTJOB01) Row 00001 of 00014
Command ==> _____ Scroll ==> CSR

```

Name	Description	Percent of CPU time * 10.00%	+3.8%
		*....1....2....3....4....5....6....7....8	
SYSTEM	System/OS Services	93.67	=====
→ +ICS	CICS Services	47.43	=====
→ SVCTYPE1	Type 1 System SVC	22.43	=====
→ MVS	MVS System	5.42	===
→ NUCLEUS	Nucleus Modules	5.27	===
→ SVCTYPE2	Type 2 System SVC	5.12	===
→ LEBASE	LE Base Modules	3.61	=
→ USERSVC	User/Vendor SVC	1.95	=
→ DB2	DB2 Services	1.95	=
→ SM	Storage Manager	0.30	
→ LECOBOL	LE COBOL component M	0.15	
NOSYMB	No Module Name	6.02	===
APPLCN	Application Code	0.30	

The CICS Group has now been expanded to show load modules in the next hierarchical level:

```

File View Navigate Help
-----
C01: CPU Usage by Category (0621/TSTJOB01) Row 00001 of 00014
Command ==> _____ Scroll ==> CSR

```

Name	Description	Percent of CPU time * 10.00%	+1.8%
		*....1....2....3....4....5....6....7....8	
SYSTEM	System/OS Services	93.67	=====
→ CICS	CICS Services	47.43	=====
→ DFHSIP	CICS Services	22.89	=====
→ DFHAPLI	CICS Services	3.46	==
→ DFHPGDM	PG domain - intia	3.46	==
→ DFHFCVS	File access VSAM r	2.86	=
→ DFHZCB	VTAM working set m	2.86	=
→ DFHAIP	CICS Services	2.40	=
→ DFHMNDML	CICS Services	1.35	=
→ DFHMCX	BMS fast path modu	1.35	=
→ DFHZCP	Terminal managemen	1.05	=
→ DFHF CFR	File control file	0.90	
→ DFHAPSM	AP domain - transa	0.75	

### Name Column

The load module name appears under this heading.

### Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise "Application Program" is displayed.

### CPU Percent Column

The measured CPU execution for this Load Module appears under this heading.

### CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

**Name Column**

The CSECT name appears under this heading.

**Description Column**

This will display "CSECT in xxxxxxxx" where xxxxxxxx is the name of the load module to which the CSECT belongs.

**SVC (Supervisor Call)**

This line shows attribution of measured activity during execution of an MVS Supervisor Call.

**Name Column**

"SVC" followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example — 'SVC120'.

**Description Column**

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example: "GETMAIN/FREEMAIN."

**SQL Statement**

This item attributes measured activity to a DB2 SQL statement.

**Name Column**

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequences numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

**Description Column**

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

**DL/I Call**

This item attributes measured activity to an IMS DL/I call.

**Name Column**

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

**Description Column**

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call, in *csect+offset* format, follows.

**Adabas Call**

This item attributes measured activity to an Adabas call.

**Name Column**

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

**Description Column**

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code

that was issued, is displayed in this field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

#### Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

#### Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.

#### Description Column

"Unresolved Address" appears under this heading.

## Subset reports

This report can generate subset reports for any detail line. By entering a report code on a detail line, a pop-up subset report is displayed for this item. The item selected is scaled to 100 percent. The available subset reports are listed below in "Line commands, on objects."

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display context help information.
++	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Show additional details.
+	Category, Load Module, SVC, SQL command, DLI call, Adabas call.	Expand to reveal next level.
-	Category, Load Module, SVC, SQL command, DLI call, Adabas call.	Collapse to hide next level.
SV	SV Category, SVC, SQL command, DLI call, Adabas call.	Sort next level by value.
SN	Category, SVC, SQL command, DLI call, Adabas call.	Sort next level by name.
M	Load Module, CSECT.	Display load module information.
P	Load Module, CSECT, SQL command, DLI call, Adabas call.	Display source program mapping.
C01	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C01 report subset.

Cmd	When Applied To Object	Action
C02	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C02 report subset.
C03	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C03 report subset.
C08	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C08 report subset.
C09	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## SETUP options

The following SETUP options can be selected with the SETUP primary command:

### Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

### Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category. This is not available for CICS measurements.

### Show the DATAMG category

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of OPEN and CLOSE functions is not included in this category. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.



## C02 - CPU usage by module

### Overview

This report analyzes measured CPU consumption. It attributes CPU consumption to load modules.

In addition, any execution measured at locations for which no load module name could be determined is attributed to hexadecimal address ranges.

A sample report as it is initially displayed, with no expansion, is shown here:

```
File View Navigate Help
-----
C02: CPU Usage by Module (0656/TSTJOB01) Row 00001 of 00207
Command ==> Scroll ==> CSR
```

Name	Description	Percent of CPU time * 10.00% ±1.1%	*...1...2...3...4...5...6...7...8
ISRSUPC	Application Progr	39.34	=====
C0020	Application Progr	14.57	=====
TGG0193B	QSAM/BSAM Process	3.57	==
TGDDCFSR	Storage Managemen	3.25	==
TSPMAIN	Application Progr	2.66	=
C0325	Application Progr	2.47	=
TSPSUBS	Application Progr	2.44	=
C0200	Application Progr	2.16	=
TOSVSSCQ	Nucleus Routine	1.99	=
TAXPQ	Nucleus Routine	1.94	=
TAXVF	Nucleus Routine	1.83	=
TAXVP	Nucleus Routine	1.58	=
TEAVESVC	Supervisor Contro	1.56	=
TECVEXCP	Execute channel p	1.48	=
C0399	Application Progr	1.38	=
C0310	Application Progr	0.92	=

### Detail line descriptions

Each line represents a System Object – an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

#### Load Module

**Name** Column the load module name appears under this heading.

#### Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

#### CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

A sample report with the second hierarchical level (CSECT) displayed is shown here:



```

File View Navigate Help
-----
C02: CPU Usage by Module (0656/TSTJOB01) Row 00005 of 00220
Command ==> _____ Scroll ==> CSR
Name      Description      Percent of CPU time * 2.50% ±1.1%
          *...1...2...3...4...5...6...7...8...9
ISPMAIN   Application Progr  2.66 =====
→ ISPMBP  CSECT in ISPMAI  1.26 ===
→ ISPMBX  CSECT in ISPMAI  0.52 =
→ ISPMOB  CSECT in ISPMAI  0.37 =
→ ISPMBW  CSECT in ISPMAI  0.32 =
→ ISPMUL  CSECT in ISPMAI  0.07
→ ISPMRO  CSECT in ISPMAI  0.05
→ ISPMCO  CSECT in ISPMAI  0.01
→ ISPMTB  CSECT in ISPMAI  0.01
→ ISPMUX  CSECT in ISPMAI  0.01
→ ISPMBY  CSECT in ISPMAI  0.01

C0325    Application Progr  2.47 =====
→ C0325  CSECT in C03      2.47 =====

ISPUBS   Application Progr  2.44 =====
C0200    Application Progr  2.16 =====

```

**Name Column**

The CSECT name appears under this heading.

**Description Column**

This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

**Unresolved Address**

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

**Name Column**

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.

**Description Column**

“Unresolved Address” appears under this heading.

**Line commands**

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

**on objects**

Cmd	When Applied To Object	Action
?	Load Module, CSECT, Unresolved Address	Display context help information.
++	Load Module, CSECT, Unresolved Address	Show additional details.
+	Load Module	Expand to reveal next level.
-	Load Module	Collapse to hide next level.
M	Load Module, CSECT	Display load module information.

Cmd	When Applied To Object	Action
P	Load Module, CSECT	Display source program mapping.
C09	Load Module, CSECT, Unresolved Address	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| IDA019L1 Virtual I/O (VIO) 16.53 00000000 |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+

Calculation Details
CPU measurements                215
In load module                  IDA019L1
Total CPU measurements          1,300
Percent in category             16.53%

Processor states for the CPU usage measurements

Processor State                Nbr of Samples Percentage
Storage key 8                  215      100.00%
Problem state                  215      100.00%
Supervisor state               0         0.00%
Execution in SVC               0         0.00%
Execution in real-mode         0         0.00%
Primary-space mode             215      100.00%
Access-register mode           0         0.00%
Secondary-space mode           0         0.00%
Home-space mode                0         0.00%
Execution on processor 0       118      54.88%
Execution on processor 1       97       45.11%
In private storage ABOVE      0         0.00%
In private storage BELOW      0         0.00%
In common storage ABOVE       215      100.00%
In common storage BELOW       0         0.00%
Execution in AMODE 24         0         0.00%
Execution in AMODE 31         215      100.00%
Execution in AMODE 64         0         0.00%

```

**SETUP options**

The following SETUP option can be selected with the SETUP primary command:

**Minimum CPU percentage**

You can set this option to eliminate modules where the CPU percentage is below a certain threshold.

---

**C03 - CPU usage by code slice**

**Overview**

This report attributes CPU usage to Code Slices. A code slice is a range of storage addresses containing executable object code. You can use this report to pinpoint the exact locations of hot spots – segments of code where CPU consumption is particularly high. You can use SETUP to adjust the resolution of the report by varying the size of the code slice.

Two types of detail line are shown:

- Code Slice
- Code Address

Initially, only the Code slice lines are visible. You can expand a Code Slice line (using the “+” line command) to reveal its subordinate Code Address lines. Initially, report lines are arranged in descending sequence by CPU activity. The most active items appear at the top. You can also sort by address by entering the “SA” line command either on the Address title field or on one of the first level report line address fields.

A sample report, as it is initially displayed, is shown here:

```

File View Navigate Help
-----
C03: CPU Usage by Code Slice (0656/TSTJOB01) Row 00001 of 01127
Command ==> Scroll ==> CSR

Address Size Location Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..
00D0B1F0 64 ASMFPSRH+0A80 20.90 =====
08A45CC0 64 C0020+1CC0 3.50 ==
00D0D000 64 ASMFRDLN+0080 3.23 ==
00D0F480 64 ASMFRDLN+2500 3.09 ==
08A45300 64 C0020+1300 2.21 =

```

If you wanted to expand, for example, the third line, enter the “+” line command:

```

File View Navigate Help
-----
C03: CPU Usage by Code Slice (0656/TSTJOB01) Row 00001 of 01127
Command ==> Scroll ==> CSR

Address Size Location Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..
00D0B1F0 64 ASMFPSRH+0A80 20.90 =====
08A45CC0 64 C0020+1CC0 3.50 ==
+00D0D000 64 ASMFRDLN+0080 3.23 ==
00D0F480 64 ASMFRDLN+2500 3.09 ==
08A45300 64 C0020+1300 2.21 =

```

The subordinate Code Address lines would then be displayed:

```

File View Navigate Help
-----
C03: CPU Usage by Code Slice (0656/TSTJOB01) Row 00001 of 01131
Command ==> Scroll ==> CSR

Address Size Location Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..
00D0B1F0 64 ASMFPSRH+0A80 20.90 =====
08A45CC0 64 C0020+1CC0 3.50 ==
00D0D000 64 ASMFRDLN+0080 3.23 ==
→ 00D0D000 ASMFRDLN+0080 2.30 =
→ 00D0D026 ASMFRDLN+00A6 0.51
→ 00D0D036 ASMFRDLN+00B6 0.42
00D0F480 64 ASMFRDLN+2500 3.09 ==

```

Remember, you can also expand an entire report by typing “+” on the first heading, in this report it would be the Address heading.

## Detail line descriptions

### Code Slice

This line represents a block (or “slice”) of contiguous bytes of object code for which CPU execution is quantified. The number of times CPU execution was observed within this block is expressed as a percentage of the total number of CPU execution observations.

The hexadecimal address of the beginning of the slice is shown under the Address heading. The size of the slice, in bytes, is shown under the Size heading. If possible, the address of the beginning of the slice is expressed in the form CSECT+offset, or Module+offset, under the Location heading.

Source program mapping can be accessed from this line by entering a “p” line command.

### Code Address

These lines are displayed as subordinate lines under the appropriate Code Slice line and show individual addresses at which execution was observed. The number of times execution was observed at such an address is expressed as a percentage of the total number of CPU execution observations.

Source program mapping can be accessed from this line by entering a “p” line command.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to view a pop-up menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Code Slice, Code Address	Display context help information.
++	Code Slice, Code Address	Show additional details.
+	Code Slice	Expand to reveal next level.
-	Code Slice	Collapse to hide next level.
SV	Code Slice	Sort next level by value.
SA	Code Slice	Sort next level by address.
M	Code Slice	Display load module information.
P	Code Slice, Code Address	Display source program mapping.
C09	Code Slice, Code Address	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Address, Size, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
-	Address	Collapse to show only first level.
-	Percent CPU	Zoom out scale.

Cmd	When Applied To Object	Action
SV	Address	Sort next level by value.
SA	Address	Sort next level by address.

## SETUP options

The following SETUP options can be selected with the SETUP primary command:

### Code slice size

Use this to adjust the size of the Code Slice to be reported.

### Minimum CPU percentage

You can set this option to eliminate Code Slice entries from the report, where the CPU percentage is below a certain threshold.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+
|                                     More:  +
+-----+-----+-----+-----+-----+-----+
| 00FF04A0  56 CPUREL          9.84 00000
+-----+-----+-----+-----+-----+-----+

Calculation Details
CPU measurements          128
Address range             00FF04A0 to 00FF04D7
Total CPU measurements   1,300
Percent in category      9.84%

Processor states for the CPU usage measurements

Processor State          Nbr of Samples  Percentage
Storage key 0            128          100.00%
Problem state            0             0.00%
Supervisor state        128          100.00%
Execution in SVC        128          100.00%
Execution in real-mode   0             0.00%
Primary-space mode      128          100.00%
Access-register mode    0             0.00%
Secondary-space mode    0             0.00%
Home-space mode         0             0.00%
Execution on processor 0 74           57.81%
Execution on processor 1 54           42.18%
In private storage ABOVE 0             0.00%
In private storage BELOW 0             0.00%
In common storage ABOVE 0             0.00%

```

## C04 - CPU usage timeline

### Overview

This timeline analysis breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive CPU usage trends, such as blocks of intensive consumption or long periods of waits. The percentage value and the graph quantify CPU usage for an interval. The percentage is derived by dividing the number of samples CPU activity was observed by the number of samples in the interval. This, effectively, is the percentage of time the CPU was executing instructions.

A sample CPU Usage Timeline report is shown here:

```
File View Navigate Help
-----
C04: CPU Usage Timeline (0656/TSTJOB01) Row 00001 of 00015
Command ==> Scroll ==> CSR

SEQN  Seconds  Sig  Percent of Interval * 10.00% ±1.1%
      *...1...2...3...4...5...6...7...8...9...*
0001  10.324  69% 19.08 =====
0002   9.114  64% 49.55 =====
0003   8.667  70% 70.82 =====
0004   9.153  83% 43.65 =====
0005   9.161  77% 39.36 =====
0006   9.094  70% 35.46 =====
0007   8.791  75% 41.95 =====
0008   7.424  89% 12.18 =====
0009   6.988  76% 63.63 =====
0010   6.741  71% 64.83 =====
0011   6.475  75% 70.12 =====
0012   6.467  73% 68.43 =====
0013   6.465  71% 67.03 =====
0014   6.422  75% 70.42 =====
0015   6.446  72% 64.60 =====
```

### Detail line descriptions

Each line represents reports values under the following headings:

- SEQN
- Seconds
- Sig

**SEQN** This is the sequence number of the interval. Intervals are numbered 0001, 0002, etc. You can create a subset of report C01, C02, or C03 from this line by entering the report code as a line command. A pop-up window of the report will be displayed, and the subset of data used for the report will be the samples from this interval.

#### Seconds

This is the duration of the interval in seconds.

#### Sig

This quantifies the significance of the measurement for the interval. This is the percentage of samples in the interval the address space was not Queued – either CPU consumption or WAIT state was observed.

## Subset reports

This report can generate subset reports for any detail line. By entering a report code on a detail line, a pop-up subset report is displayed for this item. The item selected is scaled to 100 percent. The available subset reports are listed below in "Line commands, on objects."

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	SEQN (sampling interval)	Display context help information.
++	SEQN (sampling interval)	Show additional details.
C01	SEQN (sampling interval)	Display C01 report subset.
C02	SEQN (sampling interval)	Display C02 report subset.
C03	SEQN (sampling interval)	Display C03 report subset.
C09	SEQN (sampling interval)	Display C09 report subset.

This report does not have any line commands on headings.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
-----+-----
S Options for CPU Usage Timeline          001 of 00015
C                                         ==> CSR
S Number of Intervals . . . . . 15
S This is the number of equal time intervals within
0 the duration of the measurement that are to be
0 reported. Each report line will show measurement
0 information for one interval.
```

### Number of Intervals

Use this option to change the number of equal time intervals that are reported.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:



```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 0001      8.269  52% 22.63  ===== |
+-----+

Information about sampled interval

Interval Number      1
Nbr of Samples       667
Duration             0 minutes, 8.26 seconds
Active CPU Samples   151 =====
WAIT Samples         200 =====
Queued CPU Samples   316 =====

```

## C05 - CPU usage by task/category

### Overview

This report analyzes measured CPU consumption. It shows, for each Task (TCB), the percentage of the total CPU time measured in that Task. Under each task, this information is shown under the following general categories:

**APPLCN**

Application Code

**SYSTEM**

System/OS Services

**DATAMG**

Data Management (DASD) Requests

**DB2SQL**

SQL Processing

**IMSDLI**

IMS DL/I Calls

**IMSDLI**

IMS DL/I Calls

**ADABAS**

Adabas requests

In addition, any activity observed at locations for which no load module name could be determined is attributed to a category:

**NOSYMB**

No Module Name Found

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy (Tasks) is visible. Often there will only be one task, however this example has many. To expand a task to show the next hierarchical level, you can type the "+" line command on the detail line. You can also enter the "+" line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

```

File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00041
Command ==> _____ Scroll ==> CSR
Name Description Percent of CPU time * 10.00% ±3.8%
*....1....2....3....4....5....6....7....8.
DFHKETCB-007 TCB=008DAD90 52.19 =====
DFHKETCB-001 TCB=008DA6B8 32.07 =====
DFHKETCB-012 TCB=008C2068 13.16 =====
DFHKETCB-008 TCB=008DAA68 2.57 =
TEAVAR00-002 TCB=008FE0A8 0.00
TEAVTSDT-003 TCB=008FFE88 0.00
DFSPAT00-024 TCB=008BC210 0.00
DFSPAT00-025 TCB=008B9E88 0.00
DFHSIP-005 TCB=008F69F8 0.00
DFSPAT00-026 TCB=008B9CD8 0.00
DFHKETCB-009 TCB=008C2E88 0.00
DFSPAT00-027 TCB=008B9A30 0.00
DFHKETCB-011 TCB=008C2750 0.00
DFSPAT00-028 TCB=008B9788 0.00
CSQCSERV-014 TCB=008BDE88 0.00
DFSPAT00-029 TCB=008B94E0 0.00
CSQCSERV-016 TCB=008BDA60 0.00

```

## Detail line descriptions

Each line represents a System Object – an object to which CPU time is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

**Task** This is the highest level object in the report. Each active Task is reported. The percentage of the total measured CPU time which was measured in this Task is reported. A SETUP option is available which specifies that all Tasks – including inactive tasks – are to be displayed.

### Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

### Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

### Category

Activity within a Task is categorized as APPLCN, SYSTEM, DATAMG, DB2SQL, IMSDLI, ADABAS or NOSYMB.

### DPA Group

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, MVS, SVC, etc. By entering a “+” on the SYSTEM category line:

```

File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00045
Command ==>>> _____ Scroll ==>> CSR

```

Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ +SYSTEM	System/OS Servic	52.19	=====
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

The list of objects in this category is expanded to the next level of the hierarchy to include DPA groups:

```

File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00048
Command ==>>> _____ Scroll ==>> CSR

```

Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVC	SVC Routines	51.13	=====
→ CICS	CICS Subsystem	0.60	
→ MVS	MVS System	0.45	
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

**Note:** Note Using the SETUP primary command, you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group.

In this sample screen Subgroup has been selected in SETUP, note that the SVC group has now been replaced with SVC subgroups (a subgroup for each SVC type.)

```

File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00014
Command ==>>> _____ Scroll ==>> CSR

```

Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVCTYPE1	Type 1 System	24.81	=====
→ SVCTYPE2	Type 2 System	14.22	=====
→ SVCTYPE4	Type 4 System	7.11	===
→ SVCTYPE3	Type 3 System	4.99	==
→ CICS	CICS Subsystem	0.60	
→ MVS	MVS System	0.45	
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

### Name Column

The symbolic name of the Group/Subgroup appears under this heading.

### Description Column

A Group/Subgroup description appears under this heading.

## Load Module

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

For example, to see the load modules under the Group/Subgroup line MVS, enter “+” on the MVS object:

```
File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00014
Command ==> _____ Scroll ==> CSR

Name          Description          Percent of CPU time * 10.00% ±3.8%
*....1....2....3....4....5....6....7....8.
DFHKETCB-007  TCB=008DAD90          52.19  =====
→ SYSTEM      System/OS Servic        52.19  =====
→ SVCTYPE1    Type 1 System          24.81  =====
→ SVCTYPE2    Type 2 System          14.22  =====
→ SVCTYPE4    Type 4 System           7.11   ===
→ SVCTYPE3    Type 3 System           4.99   ==
→ CICS        CICS Services           0.60
→ +VS        MVS Services            0.45
→ APPLCN     Application Code         0.00
→ DATAMG     Data Mgmt Proces        0.00
```

The MVS Group has now been expanded to show load modules in the next hierarchical level:

```
File View Navigate Help
-----
C05: CPU Usage by Task/Category (0711/TSTJOB01) Row 00001 of 00016
Command ==> _____ Scroll ==> CSR

Name          Description          Percent of CPU time * 10.00% ±3.8%
*....1....2....3....4....5....6....7....8.
DFHKETCB-007  TCB=008DAD90          52.19  =====
→ SYSTEM      System/OS Servic        52.19  =====
→ SVCTYPE1    Type 1 System          24.81  =====
→ SVCTYPE2    Type 2 System          14.22  =====
→ SVCTYPE4    Type 4 System           7.11   ===
→ SVCTYPE3    Type 3 System           4.99   ==
→ CICS        CICS Services           0.60
→ +VS        MVS Services            0.45
→ IGGCLA0     Data Managem           0.30
→ IGVVSM3I    Virtual Stor           0.15
```

### Name Column

The load module name appears under this heading.

### Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

### CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

### Name Column

The CSECT name appears under this heading.

**Description Column**

This will display "CSECT in xxxxxxxx" where xxxxxxxx is the name of the load module to which the CSECT belongs.

Source program mapping can be accessed from this line by entering a "p" line command.

**SVC (Supervisor Call)**

This line shows attribution of measured activity during execution of an MVS Supervisor Call.

**Name Column**

"SVC" followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example, "SVC120."

**Description Column**

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example: "GETMAIN/FREEMAIN."

**DDNAME**

These lines appear under the DATAMG category and indicate the DDNAME of a file to which CPU usage is attributed. The quantification indicates CPU time consumed in data management routines.

**Data Management Request**

These lines appear under DDNAME lines and show a further breakdown of CPU usage for the DDNAME to the specific I/O request statements.

**SQL Statement**

This item attributes measured activity to a DB2 SQL statement.

**Name Column**

A sequence number is assigned to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequence numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

**Description Column**

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

**DL/I Call**

This item attributes measured activity to an IMS DL/I call.

**Name Column**

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

**Description Column**

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call. in *csect+offset* format, follows.

**Adabas Call**

This item attributes measured activity to an Adabas call.

### Name Column

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

### Description Column

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code that was issued, is displayed in this field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

### Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

### Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example: "08915xxx" means the range from 08915000 to 08915FFF.

### Description Column

"Unresolved Address" appears under this heading.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Task, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Display context help information.
++	Task, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Show additional details.
+	Task, Category, Load Module, SVC, SQL command, DLI call, Adabas call	Expand to reveal next level.
-	Task, Category, Load Module, SVC, SQL command, DLI call, Adabas call	Collapse to hide next level.
SV	Task, Category, SVC, SQL command, DLI call, Adabas call	Sort next level by value.
SN	Task, Category, SVC, SQL command, DLI call, Adabas call	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, SQL command, DLI call, Adabas call	Display source program mapping.
C09	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Display C09 report subset.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## SETUP options

The following SETUP options can be selected with the SETUP primary command:

### Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

### Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

### Show the DB2SQL category

You can choose to show the DB2SQL category in which CPU time attributed to SQL processing is shown.

### Show the DATAMG category

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of OPEN and CLOSE functions is not included in this category. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

### Show the IMSDLI category

This shows activity attributed to IMS DLI calls. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

### Show the ADABAS category

This shows activity attributed to Adabas requests. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| > CAZ00080   Application Pr 4.73 00 |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+

Calculation Details
CPU measurements                34
In load module                  CAZ00080
Total CPU measurements          718
Percent in category             4.73%

Processor states for the CPU usage measurements

Processor State                Nbr of Samples Percentage
Storage key 0                  34      100.00%
Problem state                  0         0.00%
Supervisor state              34      100.00%
Execution in SVC               0         0.00%
Execution in real-mode        0         0.00%
Primary-space mode            34      100.00%
Access-register mode          0         0.00%
Secondary-space mode          0         0.00%
Home-space mode               0         0.00%
Execution on processor 0      10      29.41%
Execution on processor 1     24      70.58%
In private storage ABOVE     34      100.00%
In private storage BELOW     0         0.00%
In common storage ABOVE      0         0.00%
In common storage BELOW      0         0.00%
Execution in AMODE 24        0         0.00%
Execution in AMODE 31       34      100.00%
Execution in AMODE 64        0         0.00%

```

## C06 - CPU usage by task/module

### Overview

This report analyzes measured CPU consumption. It shows, for each Task (TCB), the percentage of the total CPU time measured in that Task. Under each task, a further breakdown of CPU consumption is shown by load modules.

In addition, any execution measured at locations for which no load module name could be determined is attributed to hexadecimal address ranges.

### Detail line descriptions

Each line represents a System Object, an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the "+" line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

**Task** This is the highest level object in the report. Each active Task is reported.



The percentage of the total measured CPU time which was measured in this Task is reported. A SETUP option is available which specifies that all Tasks - including inactive tasks - are to be displayed.

**Name Column**

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

**Description Column**

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

**Load Module**

**Name Column**

The load module name appears under this heading.

**Description Column**

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise "Application Program" is displayed.

**CSECT (Control Section)**

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

**Name Column**

The CSECT name appears under this heading.

**Description Column**

This will display "CSECT in xxxxxxxx" where xxxxxxxx is the name of the load module to which the CSECT belongs.

**Unresolved Address**

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

**Name Column**

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example: "08915xxx" means the range from 08915000 to 08915FFF.

**Description Column**

"Unresolved Address" appears under this heading.

## Sample reports

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy (Tasks) is visible. Often there will only be one task, however this example has many. To expand a task to show the next hierarchical level, you can type the "+" line command on the detail line. You can also enter the "+" line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

```

File View Navigate Help
-----
C06: CPU Usage by Task/Module (0711/TSTJOB01) Row 00001 of 00021
Command ==> _____ Scroll ==> CSR
Name      Description      Percent of CPU time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7....8.
PMSEL-012 TCB=008B8318      46.65 =====
TSPTASK-008 TCB=008B8D90      11.87 =====
PMSEL-021 TCB=008B8318      11.18 =====
TSPF-007 TCB=008E1190      10.70 =====
EXEC-017 TCB=008B8A50       5.13 ===
EX-018 TCB=008B8A50       3.21 ==
CALL-014 TCB=008A0B50       2.51 =
CALL-011 TCB=008A0130       1.92 =
CALL-020 TCB=008A0130       1.76 =
EX-010 TCB=008B8B48       1.28 =
EXEC-013 TCB=008A0E68       1.07 =
ALLLIB-019 TCB=008A00F0       0.96
ALLLIB-015 TCB=008A00F0       0.90
FREE-016 TCB=008A00F0       0.80
TEAVAR00-001 TCB=008FE0A8       0.00
TEAVTSDT-002 TCB=008FFE88       0.00
TEESB605-003 TCB=008FFBF8       0.00

```

Here is a sample with the first task fully expanded: Line commands:

```

File View Navigate Help
-----
C06: CPU Usage by Task/Module (0694/TSTJOB01) Row 00001 of 01111
Command ==> _____ Scroll ==> CSR
Name      Description      Percent of CPU time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7....8.
PMSEL-012 TCB=008B8318      46.65 =====
→ C0200 Application Prog      9.84 ====
→ C0200 CSECT in C0      9.84 ====
→ C0020 Application Prog      7.86 ==
→ C0020 CSECT in C0      7.86 ==
→ BKNCESUP Application Prog      2.88 =
→ BKNCESUP CSECT in BKNCE      2.35 =
→ BKNSTFMT CSECT in BKNCE      0.53
→ IGDDCFSR Storage manageme      2.30 =
→ IAXVF Nucleus Routrine      2.08 =
→ IARVFRMN Real storage m      2.08 =
→ C0010 Application Prog      1.65 =
→ C0010 CSECT in C0      1.65 =
→ IAXVP Nucleus Routine      1.33 =
→ IARVPGTI Real storage m      1.33 =
→ IGWLHLS DFSMS      0.96
→ IGWLHRLS DFSMS      0.32
→ IGWLHAJB DFSMS      0.16

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Unresolved Address	Show additional details.

Cmd	When Applied To Object	Action
+	Task, Load Module	Expand to reveal next level.
-	Task, Load Module	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task, Category	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.
C09	Load Module, CSECT, Unresolved Address	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name, Description, Percent CPU	Sort next level by value.
SN	Name, Description, Percent CPU	Sort next level by name.

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
| > CAZ00080   Application Pr 4.73 00 |
+-----+-----+-----+-----+-----+-----+

Calculation Details
CPU measurements                34
In load module                  CAZ00080
Total CPU measurements         718
Percent in category            4.73%

Processor states for the CPU usage measurements

Processor State                Nbr of Samples Percentage
Storage key 0                   34      100.00%
Problem state                   0         0.00%
Supervisor state                34      100.00%
Execution in SVC                 0         0.00%
Execution in real-mode           0         0.00%
Primary-space mode              34      100.00%
Access-register mode            0         0.00%
Secondary-space mode            0         0.00%
Home-space mode                 0         0.00%
Execution on processor 0        10       29.41%
Execution on processor 1        24       70.58%
In private storage ABOVE        34      100.00%
In private storage BELOW        0         0.00%
In common storage ABOVE         0         0.00%
In common storage BELOW         0         0.00%
Execution in AMODE 24           0         0.00%
Execution in AMODE 31          34      100.00%
Execution in AMODE 64           0         0.00%

```

## C07 - CPU usage by procedure

### Usage

Use this report to see quantification of CPU usage at the source program procedure level.

### Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

### Detail line hierarchy

C07 displays detail lines at a single level. Up to four types of detail lines are reported.

- Level 1 Source Procedure
- Level 1 Source Procedure
- Level 1 Source Procedure

...  
**Level 1** APPLCN Category  
**Level 1** SYSTEM Category  
**Level 1** NOSYMB Category

## Detail line descriptions

### Source procedure detail line

This identifies a source program procedure and quantifies CPU usage attributed to the procedure. The source procedure detail lines are displayed only when the source program or programs are mapped and loaded. There are two ways to map and load the source program. You can use the A01 panel, or you can open any other Application Performance Analyzer report that supports the 'P' line command and use the 'P' line command to map and load the source before opening the C07 report. When the source is mapped and loaded, the source procedure details lines are displayed and the source can be viewed using the 'P' line command. See Chapter 11, "Source program mapping," on page 637 for more details.

Under Heading	This is Displayed
Program	The name of the CSECT in the module containing the source procedure.
Procedure Name	The name of the source procedure.
Percent of CPU Time	The percentage of CPU time consumed during execution in the source procedure.

### APPLCN Category detail line

Any execution measured in application programs that could not be associated with a source program procedure is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

### SYSTEM Category detail line

Any execution measured in system programs that could not be associated with a source program procedure is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

### NOSYMB Category detail line

Any execution measured at addresses that could not be associated with a load module is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

## Sample reports

A sample report is shown here:

File View Navigate Help			
C07: CPU Usage by Procedure (0757/TSTJOB01)		Row 00001 of 00009	
Command ==>		Scroll ==> CSR	
Program	Procedure Name	Percent of CPU time * 10.00% ±2.5%	
			*...1...2...3...4...5...6...7...8
LPFRAYV4	B300-PROCESS-ACCTS	32.86	=====
LPFRAYV4	A200-CALCULATE-RTE	16.60	=====
LPFRAYV4	A100-CALCULATE-MTX	11.22	=====
LPFRAYV4	B300-EXIT	0.53	
LPFRAYV4	A200-EXIT	0.46	
LPFRAYV4	A100-EXIT	0.06	
SYSTEM	System/OS Services	37.45	=====
APPLCN	No Procedure Mapped	0.79	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Program, Category	Display context help information.
++	Program, Category	Show additional details.
M	Program	Display load module information.
P	Program	Display source program mapping.
C09	Program, Category	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Program, Procedure Name, Percent CPU	Display context help information.
+	Procedure name	Expand field size.
+	Percent CPU	Zoom in scale.
-	Procedure name	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Program, Procedure Name, Percent CPU	Sort next level by value.
SN	Program, Procedure Name, Percent CPU	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:



---

## C08 - CPU usage referred attribution

### Usage

Use this report to see attribution of CPU usage measured in system modules referred back to the points of invocation in application modules. A SETUP option is available to display the system modules at the highest level, with a breakdown of the application programs that invoked them.

### Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

### Detail line hierarchy

The first level detail line shows an application module to which CPU usage in system modules has been attributed. You can expand each line to reveal additional hierarchical levels of detail (using the "+" line command).

The hierarchy is illustrated here:

- Level 1 Application Module
- Level 2 CSECT in application module
- Level 3 Offset in CSECT
- Level 3 Source statement
- Level 4 System module
- Level 5 CSECT in System module
- Level 4 Unresolved address

The optional SETUP shows the system modules that have referred attribution with additional levels to show which application programs invoked them. You can expand each line to reveal additional hierarchical levels of detail (see Expanding Report Lines).

The hierarchy is illustrated here:

- Level 1 System module
- Level 2 CSECT in System module
- Level 3 Application Module
- Level 4 CSECT in application module
- Level 5 Offset in CSECT
- Level 5 Source statement
- Level 1 Unresolved address

### Detail line descriptions

#### Application module

This identifies an application module to which attribution of CPU usage in system routines has been referred. During the measurement, Application Performance Analyzer determined that execution in system modules was initiated by a system request statement (such as a CALL) with an invocation point in the identified application module.

Under Heading	This is Displayed
Name	Name of application load module in which CPU usage measured in system modules was attributed.
Description	Functional description of the load module if one is available. Otherwise, "Application Program" is shown here.



Under Heading	This is Displayed
Percent of CPU Time	The percentage of attributed system module CPU usage referred back to this application module.

### CSECT in application module

These lines appear under the application module detail line. Each one reports an external name (CSECT) within the application module in which invocation points for attributed CPU execution reside.

Under Heading	This is Displayed
Name	Name of CSECT in which CPU usage measured in system modules was attributed.
Description	CSECT in loadmodname appears here.
Percent of CPU Time	The percentage of attributed system module CPU usage referred back to this CSECT.

### Offset in CSECT

These lines appear under the CSECT detail line. Each one reports a return address offset – the point in the CSECT at which control is returned from the attributed system services CPU usage. This identifies the address of the application statement.

Under Heading	This is Displayed
Name	The hexadecimal offset of the return point in the CSECT of the system execution invocation request.
Description	“Offset in csectname” appears here.
Percent of CPU Time	The percentage of CPU time measured in this system routine for the indicated invocation/return address.

### Source statement

One or more lines showing the source statement appear at the same level as the Offset in CSECT detail line. This appears only when the source program has been mapped and loaded. For more information, see Chapter 11, “Source program mapping,” on page 637.

### System Module

This line identifies a system module in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of a system module in which CPU usage was measured and referred back to the application module under which this line appears.
Description	Functional description of the system module.
Percent of CPU Time	The percentage of CPU time measured in this system routine for the invocation/return address under which this line appears.

### CSECT in System Module

This line identifies a CSECT within a system module in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of the CSECT in which CPU usage was measured and referred back to the application module under which this line appears.
Description	Functional description of the CSECT.
Percent of CPU Time	The percentage of CPU time measured in this system CSECT for the invocation/return address under which this line appears.

### Unresolved address

This line identifies an unresolved address in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	An unresolved address range in which CPU usage was measured and referred back to the application module under which this line appears.
Description	"Unresolved Address"
Percent of CPU Time	The percentage of CPU time measured in this address range.

## Sample reports

A sample report is shown here. This has been expanded to the third level, and the source has been mapped and loaded. (It can be expanded further to show details of the modules.)

```

File View Navigate Help
-----
C08: CPU Usage Referred Attribution (3598/TSTJOB01)          Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

Name      Description          Percent of CPU time * 10.00% ±1.0%
          *....1....2....3....4....5....6....7....8.
SAMPLE1  Application Program    88.37 =====
→ SAMPLE1 CSECT in SAMPLE1    88.37 =====
  → 000854 Attribution Offset 35.06 =====
    > Source statement in: SampleMainline
    > Open Input SalesActivityFile

  → 00088A Attribution Offset 24.23 =====
    > Source statement in: SampleMainline
    > Open OUTPUT SalesReportFile

  → 000918 Attribution Offset 14.22 =====
    > Source statement in: SampleMainline
    > Close SalesActivityFile

  → 000936 Attribution Offset 13.89 =====
    > Source statement in: SampleMainline
    > Close SalesReportFile

  → 000814 Attribution Offset 0.73
    > Source statement in: SampleMainline
    > Inspect B tallying C for all '**'replacing all '**'

  → 000A72 Attribution Offset 0.20
    > Source statement in: ProcessSalesRecord
    > Read SalesActivityFile

```

A sample report using the SETUP option is shown here. It reports attribution from the system modules and CSECTs to the application programs that called them

```

File View Navigate Help
-----
C08: CPU Usage Referred Attribution (3598/TSTJOB01)          Row 00001 of 00011
Command ==>> _____ Scroll ==> CSR

Name      Description                                     Percent of CPU time * 10.00% ±5.4%
          *....1....2....3....4....5....6....7....8.
IGZCPAC   COBPACK                                           14.70 =====
→ IGZCTN1 INSPECT library                               14.41 =====
  → SAMPLE1 CICS Samples                               14.41 =====
    → SAMPLE1 CSECT in SAMPLE1                       14.41 =====
      → 0008B4 Attribution Of                          5.29 ===
      → 000936 Attribution Of                          5.00 ===
      → 000832 Attribution Of                          4.11 ==
→ IGZCDSP DISPLAY OS                                   0.29
  → SAMPLE1 CICS Samples                               0.29
    → SAMPLE1 CSECT in SAMPLE1                       0.29
      → 000952 Attribution Of                          0.29

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Display context help information.
++	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Show additional details.
+	Application Module, CSECT, Attribution Offset	Expand to reveal next level.
-	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Collapse to hide next level .
M	Application Module, CSECT, System Module, Unresolved Address	Display load module information.
P	CSECT, Attribution Offset	Display source program mapping.
C09	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.

Cmd	When Applied To Object	Action
-	Percent CPU	Zoom out scale .
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

```

+-----+
| Options for CPU Referred Attribution |
|                                     |
| Enter "/" to select an option      |
| /  Select to report attribution from the System |
|    module to the application programs that |
|    called it. Unselect to show attribution from |
|    the application program to the system module. |
|                                     |
+-----+

```

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

----- The following report line was selected -----  
| > 0005BE Attribution Offset 7.23 0000 |

Calculation Details

CPU measurements attributed to services 582  
In the csect LPFRAYV4  
Return offset 0005BE  
Total CPU measurements 8,040  
Percent in category 7.23%

Source Statement in: PROCEDURE-DIVISION  
write VSAM-record

Processor states for the CPU usage measurements

Processor State	Nbr of Samples	Percentage
Storage key 0	303	52.06%
Storage key 8	279	47.93%
Problem state	257	44.15%
Supervisor state	325	55.84%
Execution in SVC	325	55.84%
Execution in real-mode	0	0.00%
Primary-space mode	582	100.00%
Access-register mode	0	0.00%
Secondary-space mode	0	0.00%
Home-space mode	0	0.00%
Execution on processor 0	302	51.89%
Execution on processor 1	280	48.10%
In private storage ABOVE	0	0.00%
In private storage BELOW	0	0.00%
In common storage ABOVE	420	72.16%
In common storage BELOW	162	27.83%
Execution in AMODE 24	0	0.00%
Execution in AMODE 31	582	100.00%
Execution in AMODE 64	0	0.00%

In private storage ABOVE	1	0.02%
In private storage BELOW	31	0.92%
In common storage ABOVE	2,222	66.48%
In common storage BELOW	1,088	32.55%
Execution in AMODE 24	192	5.74%
Execution in AMODE 31	3,150	94.25%
Execution in AMODE 64	0	0.00%

---

## C09 - CPU usage by PSW/object code

Use this report to see information about sampled CPU execution at the machine-instruction level. This report is most useful when used in Subset Analysis mode to provide more detailed analysis for a particular quantification. You can display this report by entering the "C09" line command on an eligible CPU usage report detail line. The C09 report will show you information about the executed machine instructions.

### Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

### Detail line hierarchy

The first level detail line shows a PSW (program status word) address value that Application Performance Analyzer recorded when it made an active CPU observation. Each repeated CPU usage observation at the same PSW address is accumulated and reported as a single detail line.

In addition to the PSW address value, Application Performance Analyzer creates a separate first-level detail line if any of the following values are different:

- Execution in problem or supervisor mode
- Address mode (AMODE) 24, 31 or 64
- Address-space control: primary-space, AR mode, secondary-space or homespace
- PSW key
- SVC number if execution was in a supervisor call
- Object code at the PSW address

You can expand the first level detail line to show the object code at the PSW address. Object code is reported in the form of disassembled machine instructions. Application Performance Analyzer displays a line for each machine instruction from 12 bytes of object code captured during the measurement. The PSW address points to the sixth byte of the 12 bytes, so the first instructions reported are the ones that preceded the sampled instruction. When alternate disassembly are available (depending upon the assumed start address), they are listed under the subheading of "Alternate Disassembly".

### Detail line descriptions

#### PSW address line

One line appears for each unique PSW address. By default, these are sorted in descending sequence by CPU activity.

Under Heading	This is Displayed
Address	The PSW address of the sampled instruction.
Module	The load module name at the sampled address, or 'Unknown' if Application Performance Analyzer was unable to determine the module name.
AM	The address mode (AMODE): 24, 31 or 64.

Under Heading	This is Displayed
S/P	The SVC number if execution was in a supervisor call or S or P followed by the storage key. "S" indicates supervisor mode and "P" indicates problem mode. For example, "P8" indicates execution in problem mode in storage key 8.
AS	The address space control mode. AR indicates access-register mode, SS indicates secondary-space mode and HS indicates home-space mode. Blanks are shown for primary-space mode.
ASID	The ASID (address space ID) in hexadecimal of the address space that acquired the storage at the PSW address. This is shown only if the storage was acquired by an address space other than the measured one – a foreign address space. One example of this is the processing of an SQL request. Execution often occurs in load modules fetched into storage by one of the DB2 address spaces.
Percent of CPU Time	The percentage of CPU time observed at the indicated address.

### Machine instruction line

Each line shows one machine instruction in disassembled format. These lines pertain to the PSW address line shown above. When alternate disassembly are available (depending upon the assumed start address), they are listed under the subheading of "Alternate Disassembly".

### Sample reports

A sample report is shown here. The first entry has been expanded with the "+" line command.

```

File View Navigate Help
+-----+
C09: CPU Usage by PSW/Object Code (2133/TSTJOB01)      Row 00001 of 00018
Command ==> _____ Scroll ==> CSR

Address  Module  AM  S/P AS  ASID  Percent of CPU Time * 10.00% ±1.6%
*.....1....2....3....4....5....6...
17801392 - LPFRAYVS 31  P8          98.2 =====
→ LPFRAYVS+05D6  47F0 B240      BC 15,576(,R11)
→ LPFRAYVS+05DA  FA20 9820  A06C  AP 2080(3,R9),108(1,R10)76(,R11)

178012E4 + LPFRAYVS 31  P8          0.48
17801360 + LPFRAYVS 31  P8          0.25
17801416 + LPFRAYVS 31  P8          0.23
17801302 + LPFRAYVS 31  P8          0.15
17801312 + LPFRAYVS 31  P8          0.15
178012C4 + LPFRAYVS 31  P8          0.12
17801342 + LPFRAYVS 31  P8          0.10
178012F0 + LPFRAYVS 31  P8          0.07
17801362 + LPFRAYVS 31  P8          0.05
178012C6 + LPFRAYVS 31  P8          0.05
1780129A + LPFRAYVS 31  P8          0.02
1780137A + LPFRAYVS 31  P8          0.02
178012C0 + LPFRAYVS 31  P8          0.02

```

### Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## on objects

Cmd	When Applied To Object	Action
?	Address	Display context help information.
++	Address	Show additional details.
+	Address	Expand to reveal next level.
-	Address	Collapse to hide next level .
M	Address	Display load module information.

## on headings

Cmd	When Applied To Object	Action
?	Address, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
-	Address	Collapse to show only first level.
-	Percent CPU	Zoom out scale.
SV	Address	Sort next level by value.
SA	Address	Sort next level by address.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 18802338 + LPFRAYV4 31 P8          50.44 000000000000000000000000 |
+-----+

Calculation Details
CPU measurements           4,056
PSW address                 18802338
Total CPU measurements    8,040
Percent in category       50.44%

PSW Information
PSW Address                18802338
Module Name                LPFRAYV4
CSECT Name                 LPFRAYV4
Module+Offset              LPFRAYV4+1748
CSECT+Offset               LPFRAYV4+1748
Addressing Mode (AMODE)    31 bit
Address Space Control      Primary Space
Problem/Supervisor Mode    Problem Mode

Machine Instructions
LPFRAYV4+1744  47F0 B0C2      BC  15,194(,R11)
LPFRAYV4+1748  FA20 A830 9075  AP  2096(3,R10),117(1,R9) <- PSW add
  
```



---

## C10 - CPU Usage by Natural Program

Use this report to see how CPU time was consumed by execution of Natural programs. The Natural data extractor must be turned on during the measurement in order to produce this report.

### Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Natural object to the total number of CPU active observations.

### Detail line hierarchy

An unexpanded report shows a line for each Natural Program. The name field shows the Natural program name. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

**Level 1** Natural program  
**Level 2** Natural statement

### Detail line descriptions

#### Natural Program detail line

This is the first-level detail line.

Under Heading	This is Displayed
Program	The Natural program name for which CPU activity is reported.
Library	The name of the library or folder from which the Natural program was obtained.
Percent of CPU Time	The percentage of CPU time consumed during execution in the indicated Natural program.

#### Natural statement detail line

This is the second-level detail line.

Under Heading	This is Displayed
Program	The four digit Natural statement number for which CPU activity is reported, this will be "0000" for CPU activity for which a statement number could not be determined.
Library	The description of the line: "stmt #", followed by the Natural statement number for which CPU activity is reported. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Percent of CPU Time	The percentage of CPU time consumed during execution in the indicated Natural statement.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

+-----+
C10: CPU Usage by Natural Program (0236/TSTJOB01)          Row 00001 of 00022
Command ==> _____ Scroll ==> CSR

Program  Library                Percent of CPU Time * 10.00% ±1.9%
*....1....2....3....4....5....6....7....8....9
NATPGM1  SYSLIB                99.67 =====
→ 0010   stmt # 10      38.42 =====
→ 0020   stmt # 20      27.77 =====
→ 0090   stmt # 90      24.93 =====
→ 0120   stmt # 120     8.53 =====

NATPGM2  SYSLIB                0.16
→ 2985   stmt # 2985    0.05
→ 3687   stmt # 3687    0.02

NATPGM3  SYSLIB                0.08
→ 0183   stmt # 183     0.05
→ 0621   stmt # 621     0.02
+-----+

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Program, Natural statement	Display context help information.
++	Program, Natural statement	Show additional details.
+	Program	Expand to reveal next level.
-	Program	Collapse to hide next level.
SV	Program	Sort next level by value.
SN	Program	Sort next level by statement number.

### on headings

Cmd	When Applied To Object	Action
?	Program, Library, Percent CPU	Display context help information.
+	Program	Expand to reveal all entries.
+	Library	Expand field size.
+	Percent CPU	Zoom in scale.
-	Program	Collapse to show only first level.
-	Library	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Program, Library, Percent CPU	Sort next level by value.
SN	Program, Library, Percent CPU	Sort next level by statement number.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 0010      stmt # 10 38.42 ===== |
+-----+

Calculation Details
CPU measurements          1,700
Total CPU measurements    3,949
Percent of total          38.42%

Processor states for the CPU usage measurements

Processor State           Nbr of Samples  Percentage
-----
Storage key 8              1             0.05%
Storage key 9             1,699         99.94%

Problem state              1,700         100.00%
Supervisor state           0             0.00%

Execution in SVC           0             0.00%

Execution in real-mode     0             0.00%

Primary-space mode        1,700         100.00%
Access-register mode      0             0.00%
Secondary-space mode      0             0.00%
Home-space mode           0             0.00%

Execution on processor 0   1,700         100.00%

In private storage ABOVE  1,700         100.00%
In private storage BELOW  0             0.00%
In common storage ABOVE   0             0.00%
In common storage BELOW   0             0.00%
```

---

## W01 - WAIT time by task/category

### Overview

This report analyzes measured CPU WAIT time. It shows, for each Task (TCB), the percentage of elapsed time the Task was observed to be in a WAIT. Under each task, this information is shown under the following general categories:

#### APPLCN

Application Code

#### SYSTEM

System/OS Services

#### DATAMG

Data Management (DASD) Requests

#### DB2SQL

SQL Processing

## IMSDLI

IMS DL/I calls

## ADABAS

Adabas requests

In addition, any WAIT time observed at locations for which no load module name could be determined is attributed to a category:

## NOSYMB

No Module Name Found

The Task (TCB) name is the object at the top level of the hierarchy for this report, and is the only object visible when the report is first displayed.

A sample report is shown here, as it would appear when it is first displayed:

```
File View Navigate Help
-----
W01: WAIT Time by Category (0651/TSTJOB01) Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7....8.
ISPTASK-008 TCB=008B8D90      99.65 =====
PMSEL-012   TCB=00893528      99.58 =====
ISPF-007    TCB=008E1190      99.18 =====
ISPTASK-009 TCB=008B8738      16.54 =====
EXEC-013    TCB=008A67C0       1.01 =
ALLOC-017   TCB=008A67C0       0.06
ALLOC-015   TCB=008A67C0       0.05
ALLOC-016   TCB=008A67C0       0.04
CALL-014    TCB=008A6390       0.00
```

You can expand the entire report to show all detail lines at all hierarchical levels by entering the “+” line command on the Name heading.

## Detail line descriptions

Each line represents a System Object – an object to which WAIT time is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

**Task** This is the highest level object in the report. Each active Task is reported. The percentage of the measurement time interval the task was observed to be WAITing is reported.

**Note:** A SETUP option is available which specifies that all Tasks – including inactive tasks – are to be displayed.

### Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

### Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

### Category

WAIT time within a Task is categorized as APPLCN, SYSTEM, DATAMG, IMSDLI, DB2SQL, ADABAS or NOSYMB.

### **DPA Group**

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, VSAM.

**Note:** A SETUP option is available from which you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group. Application Performance Analyzer uses the module name to locate descriptive information in its DPA tables.

#### **Name Column**

The symbolic name of the Group/Subgroup appears under this heading.

#### **Description Column**

A Group/Subgroup description appears under this heading.

### **Load Module**

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

#### **Name Column**

The load module name appears under this heading.

#### **Description Column**

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

### **CSECT (Control Section)**

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer were able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured WAIT time will be attributed to them.

#### **Name Column**

The CSECT name appears under this heading.

Description Column This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

### **SVC (Supervisor Call)**

This line shows attribution of measured WAIT time during execution of an MVS Supervisor Call.

#### **Name Column**

“SVC” followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example, “SVC120.”

#### **Description Column**

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example, “GETMAIN/FREEMAIN.”

### **SQL Statement**

This item attributes WAIT activity to a DB2 SQL statement.

#### **Name Column**

A sequence number is assigned to each unique SQL statement

observed during the measurement. This sequence number is shown in the name field. It is possible for some sequences numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no WAIT activity was measured for these statements.

**Description Column**

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (for example, SELECT, INSERT, COMMIT).

**DL/I Call**

This item attributes WAIT activity to an IMS DL/I call.

**Name Column**

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

**Description Column**

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call, in *csect+offset* format, follows.

**Adabas Call**

This item attributes WAIT activity to an Adabas call.

**Name Column**

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

**Description Column**

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code that was issued, is displayed in the field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

**Unresolved Address**

This item attributes measurement WAIT time to a range of addresses for which a corresponding load module name could not be determined.

**Name Column**

WAIT time observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example, "08915xxx" means the range from 08915000 to 08915FFF.

**Description Column**

"Unresolved Address" appears under this heading.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## on objects

Cmd	When Applied To Object	Action
?	Task, Category, Load Module, SVC, CSECT, Unresolved Address	Display context help information.
++	Task, Category, Load Module, SVC, CSECT, Unresolved Address	Show additional details.
+	Task, Category, Load Module, SVC	Expand to reveal next level.
-	Task, Category, Load Module, SVC	Collapse to hide next level.
SV	Task, Category, SVC	Sort next level by value.
SN	Task, Category, SVC	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduces field size
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## SETUP options

The following SETUP options can be selected with the SETUP primary command:

### Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

### Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

### Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity is included in the appropriate system modules in the SYSTEM category. This category is not applicable for CICS measurements.

### Show the DATAMG category

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of





**Name Column**

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

**Description Column**

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

**Load Module****Name Column**

The load module name appears under this heading.

**Description Column**

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise "Application Program" is displayed.

**CSECT (Control Section)**

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured wait time will be attributed to them.

**Name Column**

The CSECT name appears under this heading.

**Description Column**

This will display "CSECT in xxxxxxxx" where xxxxxxxx is the name of the load module to which the CSECT belongs.

**Unresolved Address**

This item attributes wait time to a range of addresses for which a corresponding load module name could not be determined.

**Name Column**

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example: "08915xxx" means the range from 08915000 to 08915FFF.

**Description Column**

"Unresolved Address" appears under this heading. A sample report is shown here. File

A sample report is shown here.

```

File View Navigate Help
-----
W02: WAIT Time by Module (0651/TSTJOB01) Row 00001 of 00017
Command ==> _____ Scroll ==> CSR

Name          Description          Percent of Time in WAIT * 10.00% ±0.8%
*...1...2...3...4...5...6...7...8.
IKJEFT01-004  TCB=008FF6E0          100.00 =====
IKJEFT02-005  TCB=008E1640          100.00 =====
IKJEFT09-006  TCB=008E1328          100.00 =====
EX-010        TCB=008B84DB          100.00 =====
CALL-011      TCB=008B8248          100.00 =====
ISPTASK-008   TCB=008B8D90          99.65 =====
PMSEL-012    TCB=00893528          99.58 =====
ISPF-007     TCB=008E1190          99.18 =====
ISPTASK-009   TCB=008B8738          16.54 =====
EXEC-013     TCB=008A67C0           1.01 =
ALLOC-017    TCB=008A67C0           0.06
ALLOC-015    TCB=008A67C0           0.05
ALLOC-016    TCB=008A67C0           0.04
TEAVAR00-001 TCB=008FE0A8           0.00
TEAVTSDT-002 TCB=008FFE88           0.00
TEESB605-003 TCB=008FFBF8           0.00
CALL-014     TCB=008A6390           0.00

```

A sample report with a task fully expanded is shown here.

```

File View Navigate Help
-----
W02: WAIT Time by Module (0651/TSTJOB01) Row 00001 of 00086
Command ==> _____ Scroll ==> CSR

Name          Description          Percent of Time in WAIT * 10.00% ±0.8%
*...1...2...3...4...5...6...7...8.
ISPTASK-009   TCB=008B8738          16.54 =====
  ↳ ISPSUBS      Application Prog 11.21 =====
    ↳ ISPCDI      CSECT in ISPSU  8.86 =====
    ↳ ISPCAT      CSECT in ISPSU  2.21 =
    ↳ ISPCCT      CSECT in ISPSU  0.09
    ↳ ISPPDP      CSECT in ISPSU  0.04
  ↳ IGG019BB     Data Management  4.57 ===
    ↳ IGG019BB     CSECT in IGG01  4.57 ===
  ↳ IGG0CLHA     Data Management  0.25
    ↳ IGG0CLXA     CSECT in IGG0C  0.25
  ↳ IEAWEWAT     Task management  0.18
    ↳ IGC001      CSECT in IEAVE  0.18
  ↳ IGC018      Supervisor Contr 0.17
    ↳ SVC018      CSECT in IGC01  0.17
  ↳ IGC0013T     Supervisor Contr 0.12
    ↳ ICVDS03     CSECT in IGC00  0.07
    ↳ ICVCM103    CSECT in IGC00  0.04

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Unresolved Address	Show additional details.



---

## W03 - WAIT time referred attribution

### Usage

Use this report to see attribution of WAIT time. WAITs issued in system modules are referred back to the points of invocation in application modules.

### Quantification

Each report line quantifies WAIT time as a percentage. Each percentage represents the ratio of time in WAIT to the elapsed time of the measurement.

### Detail line hierarchy

The first level detail line shows a task (TCB). For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address. The second level detail line shows an application module to which WAIT time in system modules has been attributed. You can expand each line to reveal additional hierarchical levels of detail (using the "+" line command).

The hierarchy is illustrated here:

- Level 1 Task
- Level 2 Application Module
- Level 3 CSECT in application module
- Level 4 Offset in CSECT
- Level 4 Source statement
- Level 5 System module
- Level 6 CSECT in System module
- Level 5 Unresolved address

### Detail line descriptions

#### Application module

This identifies an application module to which attribution of WAIT time in system routines has been referred. During the measurement, Application Performance Analyzer determined that WAIT in system modules was initiated by a system request statement (such as a CALL) with an invocation point in the identified application module.

Under Heading	This is Displayed
Name	Name of application load module in which WAIT time observed in system modules was attributed.
Description	Functional description of the load module if one is available. Otherwise, "Application Program" is shown here.
Percent of Time in WAIT	The percentage of attributed system module WAIT time referred back to this application module.

#### CSECT in application module

These lines appear under the application module detail line. Each one reports an external name (CSECT) within the application module in which invocation points for attributed WAIT reside.

Under Heading	This is Displayed
Name	Name of CSECT in which WAIT time observed in system modules was attributed.

Under Heading	This is Displayed
Description	CSECT in loadmodname appears here.
Percent of Time in WAIT	The percentage of attributed system module WAIT time referred back to this CSECT.

### Offset in CSECT

These lines appear under the CSECT detail line. Each one reports a return address offset – the point in the CSECT at which control is returned from the attributed system services WAIT. This identifies the address of the application statement.

Under Heading	This is Displayed
Name	The hexadecimal offset of the return point in the CSECT of the system execution invocation request.
Description	“Offset in csectname” appears here.
Percent of Time in WAIT	The percentage of WAIT time observed in this system routine for the indicated invocation/return address.

### Source statement

One or more lines showing the source statement appear at the same level as the Offset in CSECT detail line. This appears only when the source program has been mapped and loaded. See Chapter 11, “Source program mapping,” on page 637 for more information.

### System module

This line identifies a system module in which WAIT was observed and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of a system module in which WAIT time was measured and referred back to the application module under which this line appears.
Description	Functional description of the system module.
Percent of Time in WAIT	The percentage of WAIT time observed in this system routine for the invocation/return address under which this line appears.

### CSECT in System module

This line identifies a CSECT within a system module in which wait time was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of the CSECT in which wait time was measured and referred back to the application module under which this line appears.
Description	Functional description of the CSECT.
Percent of Time in WAIT	The percentage of WAIT time measured in this system CSECT for the invocation/return address under which this line appears.

### Unresolved address

This line identifies an unresolved address in which WAIT time was observed and attributed to the reported application module.

Under Heading	This is Displayed
Name	An unresolved address range in which WAIT time was measured and referred back to the application module under which this line appears.
Description	"Unresolved Address"
Percent of Time in WAIT	The percentage of WAIT time observed in this address range.

## Sample reports

A sample report is show here, it has been expanded four levels.

```

File View Navigate Help
-----
W03: WAIT Referred Attribution by Task (1917/TSTJOB01)      Row 00001 of 00053
Command ==>> _____ Scroll ==>> CSR

Name      Description      Percent of CPU time * 10.00% ±0.9%%
          *....1....2....3....4....5....6....7....8.
LPFRAYVS-001 TCB=008EA1C0      39.68 =====
→ LPFRAYVS      Regression test3 39.11 =====
  → LPFRAYVS      CSECT in LPFRA 39.11 =====
    → 0005AA      Attribution 35.76 =====
      > Source statement in: PROCEDURE-DIVISION
      > write VSAM-record

    → IDA019L1      Virtual I/ 35.76 =====
      → 0004C0      Attribution 2.72 =
        > Source statement in: PROCEDURE-DIVISION
        > OPEN OUTPUT VSAM1-FILE

    → IGG0CLHA      Data Manag 2.48 =
    → IDA019LI      Virtual I/ 0.23
    → IGC0013I      Supervisor 0.00
    → 00065A      Attribution 0.34
      > Source statement in: PROCEDURE-DIVISION
      > close VSAM1-FILE

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Offset, System Module, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Offset, System Module, Unresolved Address	Show additional details.
+	Task, Load Module, Offset	Expand to reveal next level.
-	Task, Load Module, Offset	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task	Sort next level by name.
M	Load Module, CSECT, System Module	Display load module information.
P	CSECT, Offset	Display source program mapping.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent WAIT	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent WAIT	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
+-----+
| Options for WAIT Referred Attribution by Task |
|                                             |
| Enter "/" to select an option             |
| / Include "inactive" tasks in the report. An |
|   inactive task is one for which there were no |
|   observations of CPU consumption.           |
|                                             |
+-----+
```

### Include Inactive Tasks

You can include or eliminate inactive tasks from the report. An inactive task is one for which there were no observation of CPU consumption.

---

## W04 - WAIT time by task ENQ/RESERVE

### Usage

Use this report to view the wait time, QNAME and RNAME resulting from ENQueue or RESERVE requests.

Level 1 shows the MVS TCB (Task Control Block). The Name field identifies the attached subtask load module as well as a sequence number (Task Index). The Task/TCB address is shown in the Description field.

When expanded, level 2 shows a line for each unique ENQueue or RESERVE request. The Name column shows the QNAME and the description column shows the RNAME of the request. The RNAME can be up to 255 bytes. The full RNAME is shown in the detail window.

### Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an ENQueue/RESERVE request was in a wait state to the total number of samples.

## Detail line hierarchy

An unexpanded report shows a line for each MVS task for which ENQueue or RESERVE activity was sampled. You can expand each line to reveal an additional hierarchical level of detail.

The hierarchy is illustrated here:

**Level 1** TCB Task  
**Level 2** ENQueue/RESERVE

## Detail line descriptions

### TCB Task detail line

This is the first-level detail line.

Under Heading	This is Displayed
Name	The name of the program specified in the ATTACH macro that started the task as well as the TCB index number.
Description	The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.
Percent of Time in WAIT	The percentage of the measurement interval time during which the task was waiting on an ENQueue/RESERVE.

### ENQueue/ RESERVE detail line

This is the second-level detail line.

Under Heading	This is Displayed
Name	The QNAME is shown.
Description	The RNAME is shown. Only 40 characters are shown. If the RNAME is longer, the full name can always be found in the Detail window.
Percent of Time in WAIT	The percentage of the measurement interval time during which the indicated ENQueue/RESERVE was waiting.



## Sample reports

A sample report is show here, it has been expanded to the second level.

```

File View Navigate Help
-----
W04: Wait Time by Task ENQ/RESERVE (5331/TSTJOB01)          Row 00001 of 00013
Command ==>>> _____ Scroll ==>>> CSR

Name                Description                Percent of Time in WAIT * 5.00% ±0.5%
*...1...2...3...4...5...6...7
ISPF-007            TCB=008DF5E8                6.95 =====
→ ISPFEDIT          ADS04.ISPF.ISPPROF          2.78 ===
→ SYSZRACF          SYS1.RACFDS                  2.78 ===
→ SPFEDIT           USR01.SIMPLIST.TABLES      1.39 =

ISPTASK-008        TCB=008DF2D0                4.17 =====
→ SYSVTOC           BKNSM2                       1.39 =
→ SPFEDIT           USR01.SIMPLIST.L200708     1.39 =
                    .LOG
→ SYSZRACF          SYS1.RACFDS                  1.39 =

EXEC-016            TCB=008AAE88                2.78 ===
→ SYSZRACF          SYS1.RACFDS                  2.78 ===

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Task, ENQ/RESERVE	Display context help information.
++	Task, ENQ/RESERVE	Show additional details.
+	Task	Expand to reveal next level.
-	Task	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent WAIT	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent WAIT	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| SYSZRACF   SYS1.RACFDS       2.78 = |
+-----+

Calculation Details
Wait measurements           834
Total measurements         30,000
Percent of total           2.78%

QNAME   SYSZRACF
RNAME   SYS1.RACFDS
```

---

## W05 - WAIT time by tape DDNAME

### Usage

Use this report to view the wait time resulting from requests for tape mounts.

This report displays one line for each unique DDNAME for which tape mount waits occurred. The DDNAME column specifies the DDNAME for the tape and the device column specifies the device number for the tape unit.

### Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples for which a wait for a tape mount was observed and the total number of samples.

### Detail line descriptions

#### DDNAME detail line

Under Heading	This is Displayed
DDNAME	The DDNAME name.
Device	The device number for the tape unit.
Percent of Time in WAIT	The percentage of the measurement interval time during which the indicated DDNAME was waiting for a tape mount.

## Sample reports

A sample report is show here.

```
File View Navigate Help
-----
W05: Wait Time by Tape DDNAME (5508/TSTJOB01) Row 00001 of 00011
Command ==> _____ Scroll ==> PAGE

DDNAME Device Percent of Time in WAIT * 10.00% ±58.8%
*...1...2...3...4...5...6...7...8...9...*
SYSUT2 590 66.66 =====
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DDNAME	Display context help information.
++	DDNAME	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	DDNAME, Device, Percent WAIT	Display context help information.
SV	DDNAME, Device, Percent WAIT	Sort next level by value.
SN	DDNAME, Device, Percent WAIT	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
| SYSUT2   590         66.66 |
+-----+-----+-----+-----+-----+-----+
Calculation Details
Wait measurements                2
Total measurements                3
Percent of total                  66.66%

```

## D01 - DASD usage by device

**Note:** This report also covers TAPE I/O.

### Overview

This report shows how much I/O time was used by each DASD (direct access storage device) or tape device for which activity was measured during the observation session. The quantification is based on the number of samples activity on the device was observed. This is expressed as a percentage of the total number of samples.

Two types of detail lines are shown:

- Volume
- Cylinder Address (for DASD)

Initially, only the Volume lines are visible. You can expand a Volume line (using the “+” line command) to reveal its subordinate Cylinder Address lines.

A sample report is shown here, it has been fully expanded:

```

File View Navigate Help
-----
D01: DASD Usage Time by Device (0618/TSTJOB01) Row 00001 of 00006
Command ==>> _____ Scroll ==>> CSR

Volume>Cyl Unit-Dev>DD Percent of Time * 10.00% ±2.2%
*...1...2...3...4...5...6...7...8..
BKNSM2 0A93-3390 8.90 ====
→ Cyl_00BA VSAM1 8.85 ====
→ Cyl_0007 VSAM1 0.05

BKNSM1 0A92-3390 1.25 ==
→ Cyl_0086 INFILE 1.25 ==

```

## Detail line descriptions

### Volume

This shows the VOLSER value for a DASD or TAPE device for which I/O activity was measured.

### Cylinder Address

These lines appear when the “+” line command is used to expand a Volume line. Each line shows a particular DASD cylinder and further breaks down the measurement by file into quantification by specific cylinders.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Volume, Cylinder Address	Display context help information.
++	Volume, Cylinder Address	Show additional details.
+	Volume	Expand to reveal next level.
-	Volume	Collapse to hide next level.
SV	Volume	Sort next level by value.
SN	Volume	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Volume>Cyl, Unit-Dev>DD, Percent Time	Display context help information.
+	Volume>Cyl	Expand to reveal all entries.
+	Unit-Dev>DD	Expand field size.
+	Percent Time	Zoom in scale.
-	Volume>Cyl	Collapse to show only first level.
-	Unit-Dev>DD	Reduce field size.
-	Percent Time	Zoom out scale.
SV	Volume>Cyl	Sort next level by value.

Cmd	When Applied To Object	Action
SN	Volume>Cyl	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+----- The following report line was selected -----+
| BKNSM2      0A99-3390      45.09 000000000000000000000000 |
+-----+-----+

Calculation Details
Data management CPU measurements      138
Device address                        0A99
Volume serial number                  BKNSM2
I/O unit type                         DASD
Device                                3390
Total CPU measurements                306
Percent of total                       45.09%

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of I/O where the percentage of time is below a certain threshold.

---

## D02 - DASD usage by DDNAME

**Note:** This report also covers TAPE I/O.

## Overview

This report shows how much DASD or TAPE I/O time was measured for each file that was open during the observation session. The quantification is based on the number of samples activity on the file was observed. This is expressed as a percentage of the total number of samples.

Two types of detail line are shown:

- DDNAME
- Cylinder Address (for DASD)

Initially, only the DDNAME lines are visible. You can expand a DDNAME line (using the “+” line command) to reveal its subordinate Cylinder Address lines.

A sample report is shown here, it has been fully expanded:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0618/TSTJOB01) Row 00001 of 00006
Command ==> _____ Scroll ==> CSR

DDNAME>Cyl Volume>Unit Percent of Time * 10.00% ±2.2%
*...1...2...3...4...5...6...7...8..
VSAM1-02 BKNSM2 8.90 =====
→ Cyl_000A 0A93-3390 8.85 =====
→ Cyl_0007 0A93-3390 0.05
INFILE BKNSM1 1.25 ==
→ Cyl_0086 0A92-3390 1.25 ==

```

## Detail line descriptions

### DDNAME

This represents a file which was open during the observation session. If the same DDNAME is open (and closed) multiple times during the session, it is suffixed with an instance number to indicate this.

### Cylinder Address

These lines appear when the “+” line command is used to expand a DDNAME line. Each line shows a particular DASD cylinder and further breaks down the measurement by file into quantification by specific cylinders.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DDName, Cylinder Address	Display context help information.
++	DDName, Cylinder Address	Show additional details.
+	DDName	Expand to reveal next level.
-	DDName	Collapse to hide next level.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	DDName>Cyl, Unit-Dev>DD, Percent Time	Display context help information.
+	DDName>Cyl	Expand to reveal all entries.
+	Volume>Unit	Expand field size.
+	Percent Time	Zoom in scale.
-	DDName>Cyl	Collapse to show only first level.
-	Volume>Unit	Reduce field size.
-	Percent Time	Zoom out scale.





```

File View Navigate Help
-----+-----
Index Component of VSAM1
                                         More:  -
Dataset Name      USER1.DATA.TESTPF.IDX
Storage Class     BKNSMS
Device Type       3390
% Free Bytes in CI 0%
Volume Serial     BKNSM2  CI Splits      0      0
CI Size           1,024  CA Splits      0      0
Record Size (LRECL) 1,017  Logical Records 1      1
Number of Extents 1      Deleted Records 0      0
SHAREOPTIONS      (1 3)  Insrted Records 0      0
Organization      KSDS   Retrved Records 0      0
CIs per CA        33    Updated Records 0      71
Free CIs per CA   0      Bytes Free Space 32,768 32,768
Free Bytes per CI 0      Number of EXCPs 4      75
% Free CIs in CA  0%
-----+-----

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of I/O where the percentage of time is below a certain threshold.

---

## D03 - DASD usage by data set

**Note:** This report also covers TAPE I/O.

### Overview

This report shows how much DASD or TAPE I/O time was used by each data set for which activity was measured during the observation session. The quantification is based on the number of samples activity on the device was observed. This is expressed as a percentage of the total number of samples.

Two types of detail line are shown:

- Data set
- DDNAME

Initially, only the data set lines are visible. You can expand a data set line (using the "+" line command) to reveal its subordinate DDNAME lines.

A sample report is shown here, it has been fully expanded:

```

File View Navigate Help
-----+-----
D03: DASD Usage Time by Dataset (0618/TSTJOB01)      Row 00001 of 00005
Command ==>>> _____ Scroll ==>>> CSR
Dataset_Name>DDName  Percent of Time * 10.00% ±2.2%
                    *....1....2....3....4....5....6....7....8..
USER1.DATA.TESTPF    8.90 ====
→ VSAM1-02 BKNSM2    8.90 ====
USER1.TESTPF2.INFILE 1.25 ==
→ INFILE BKNSM1     1.25 ==
-----+-----

```

## Detail line descriptions

### Data set

This shows the name of a data set that was open at some point during the observation session.

### DDNAME

This line shows a DDNAME corresponding to the data set name. There could be multiple entries under a data set if the data set was open more than once (concurrently or serially) with different DDNAMEs. If the same DDNAME is open (and closed) multiple times for the data set, it is suffixed with an instance number to indicate this.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Data set Name, DDName	Display context help information.
++	Data set Name, DDName	Show additional details.
+	Data set Name	Expand to reveal next level.
-	Data set Name	Collapse to hide next level.
SV	Data set Name	Sort next level by value.
SN	Data set Name	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Data set Name>DDName, Percent Time	Display context help information.
+	Data set Name>DDName	Expand to reveal all entries.
+	Percent Time	Zoom in scale.
-	Data set Name>DDName	Collapse to show only first level.
-	Percent Time	Zoom out scale.
SV	Data set Name>DDName	Sort next level by value.
SN	Data set Name>DDName	Sort next level by name.

## Detail window

You can enter "+" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| ARA01.DATA.TESTPF          45.09 000000000000000000000000 |
+-----+

Calculation Details
Data management CPU measurements      138
I/O unit type                          DASD
Data set name                          ARA01.DATA.TESTPF
Total CPU measurements                 306
Percent of total                       45.09%

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of I/O where the percentage of time is below a certain threshold.

---

## D04 - Data set attributes

This report lists information about each of the data sets (DASD and TAPE) which were open at some point during the observation session. Various attributes of each of the data sets are reported.

A sample report is shown here:

```

File View Navigate Help
-----
D04: Dataset Attributes (0618/TSTJOB01)          Row 00001 of 00105
Command ==> _____ Scroll ==> CSR

SORT by: DDname enter SF, by Dataset Name enter SD.
Dataset information reported for 4 Files.

Non-VSAM file OUTFILE OPENed at 6:45:30.18 Monday Jan 26 2004

DDNAME          OUTFILE
Open Intent      OUTPUT
Dataset Name     USER1.TESTPF2.OUTFILE
Device Type      3390      Number of Extent 3
Volume Serial    BKNSM1   Dataset Organiza PS
Block Size (BLKSIZE) 27,930 RECFM      FIXED BLOCKED
Record Size (LRECL) 133    Data Buffers    0

Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004

DDNAME          INFILE
Open Intent      INPUT
Dataset Name     USER1.TESTPF2.INFILE
Device Type      3390      Number of Extent 1
Volume Serial    BKNSM1   Dataset Organiza PS
Block Size (BLKSIZE) 13,300 RECFM      FIXED BLOCKED
Record Size (LRECL) 133

```

Scrolling down in this example shows some VSAM file information.

```

File View Navigate Help
-----
D04: Dataset Attributes (0618/TSTJOB01) Row 00026 of 00105
Command ==> Scroll ==> CSR

VSAM file VSAM1(1) OPENed at 6:45:33.66 Monday Jan 26 2004

DDNAME          VSAM1
Open Intent     KEY,DIR,OUT,RST
Dataset Name    USER1.DATA.TESTPF.DAT
Storage Class   BKNSMS
Device Type     3390
% Free Bytes in CI 10%          Initial      Last
Volume Serial  BKNSM2   CI Splits    0            0
CI Size        8,192   CA Splits    0            0
Record Size (LRECL) 80   Logical Records 0            0
Number of Extents 1     Deleted Records 0            0
SHAREOPTIONS    (1 3) Insrted Records 0            0
Organization    KSDS   Retrved Records 0            0
CIs per CA      78    Updated Records 0            0
Free CIs per CA 11    Bytes Free Space 1,916,928   1,916,928
Free Bytes per CI 819   Number of EXCPs 2            2
% Free CIs in CA 15%
Strings         0
DATA Buffers    0
INDEX Buffers   0

```

This example shows the index component:

```

File View Navigate Help
-----
D04: Dataset Attributes (2133/TSTJOB01) Row 00060 of 00116
Command ==> Scroll ==> CSR

Index Component of VSAM1(1)

Dataset Name    USER1.DATA.TESTPF.IDX
Storage Class   BKNSMS
Device Type     3390
% Free Bytes in CI 0%          Initial      Last
Volume Serial  BKNSM2   CI Splits    0            0
CI Size        1,024   CA Splits    0            0
Record Size (LRECL) 1,017   Logical Records 0            0
Number of Extents 1     Deleted Records 0            0
SHAREOPTIONS    (1 3) Insrted Records 0            0
Organization    KSDS   Retrved Records 0            0
CIs per CA      33    Updated Records 0            0
Free CIs per CA 0     Bytes Free Space 33,792     33,792
Free Bytes per CI 0     Number of EXCPs 1            1
% Free CIs in CA 0%

```

When available to Application Performance Analyzer, the following additional DASD statistics are displayed in D04, and in the detail windows of other DASD reports:

- Average Response Time
- Average Pending Time
- Average Disconnect Time
- Average Connect Time
- Average Queued Time
- Total I/Os
- Cache Candidates
- Cache Hits
- Write Candidates

- Write Hits

This example shows some of the additional DASD statistics:

```

File View Navigate Help
-----
D04: Dataset Attributes (4167/AGM01G)                               Row 00005 of 00125
Command ==>                                                       Scroll ==> CSR
VSAM file BNCSTFL OPENed at 16:19:58.25 Tuesday Aug 25 2009

DDNAME          BNCSTFL
Open Intent     KEY,DIR,SEQ,OUT
Dataset Name    BNET.CICS22C.BNCSTFL.DATA
Storage Class   BKNDATA
Device Type     3390
% Free Bytes in CI 0%
Volume Serial   BKNA91+  CI Splits      0          0
                BKNA93
CI Size         8,192    CA Splits      0          0
Record Size (LRECL) 516    Logical Records 14         14
Number of Extents  1      Deleted Records 0          0
SHAREOPTIONS     (4 3)  Insrted Records 0          0
Organization     KSDS   Retrved Records 15,858,330 15,918,231
CIs per CA       12    Updated Records 1          1
Free CIs per CA  0      Bytes Free Space 90,112     90,112
Free Bytes per CI 0      Number of EXCPs 7,991,951 8,051,851
% Free CIs in CA 0%
Strings          1      String Waits    0
DATA Buffers     2      String Waits HWM 0
INDEX Buffers    1
Avg Response Time 0.0256  Avg Pending Time 0.0000
Avg Disconnect Time 0.0000  Avg Connect Time 0.0128
Avg Queued Time   0.0000  Total I/Os      59,900
Cache Candidates 59,900  Cache Hits      59,900

```

You can place your cursor on the SORT field and enter any of the following sort codes to re-sort the report:

- SF By DDName
- SD By Data set name

---

## D05 - DASD EXCP summary

**Note:** This report also covers TAPE I/O.

### Usage

Use this report to see a summary of the number of EXCPs for each open data set.

### Quantification

Each report line shows EXCP counts for a DDNAME. The EXCP count at the time the file was first observed to be open and the count at the time the file was last observed to be open are reported. The difference between these two values is also reported; this is the number of EXCPs occurring during the measurement interval.

### Detail line hierarchy

There is only one detail line level in this report.

## Detail line descriptions

### EXCP counts

Each detail line shows the following information.

Under Heading	This is Displayed
DDNAME	The DDNAME of the file. If multiple OPENS occurred for the DDNAME, a separate line is reported for each "instance." A sequence number is appended to the DDNAME indicating the instance.
Type	The type of file (VSAM, Non-VSAM, Tape, etc.)
Concat	The concatenation number. A value (+0, +1, +2 ...) appears here to indicate the data set position in a concatenation. A value of 'RMT' indicates this is a remote CICS VSAM dataset.
At Start	The EXCP count for the data set when first observed. For VSAM data sets, the system maintains this count for the life of the file. For non-VSAM, this only reflects EXCPs during the step.
At End	The EXCP count for the data set when last observed. For VSAM data sets, the system maintains this count for the life of the file. For non-VSAM, this only reflects EXCPs during the step.
During Measurement	The number of EXCPs for the measurement duration. This is computed as the difference between the "At Start" count and the "At End" count. <b>Note:</b> The system maintains EXCP counts at the data set level. If a data set had more than one file open concurrently under different DDNAMEs, then overlapping EXCP counts will be reported.

## Sample reports

A sample report is shown here:

File View Navigate Help						
D05: DASD EXCP Summary (0647/TSTJOB01)						Row 00001 of 00082
Command ==>						Scroll ==> CSR
DDNAME	Type	Concat	Number of EXCPs			
			At Start	At End	During Measurement	
SAMPIN	Non-VSAM		0	30	30	
ISPMLIB	Non-VSAM	+2	22	26	4	
ISP07053	Non-VSAM		19	21	2	
SYS00117	VSAM-DATA		3648	3649	1	
	VSAM_INDEX		41	42	1	
SYS00116	VSAM-DATA		2	3	1	
	VSAM_INDEX		1	2	1	
ISP07078-3	Non-VSAM		35	37	2	
ISP07073	Non-VSAM		4	5	1	
ISP07074	Non-VSAM		20	21	1	
ISP07078-1	Non-VSAM		34	35	1	
ISP07078-2	Non-VSAM		34	35	1	
ISPPROF	Non-VSAM		50	50	0	
ISPPLIB	Non-VSAM	+0	0	0	0	
ISPTLIB	Non-VSAM	+2	0	0	0	
ISPPLIB	Non-VSAM	+2	6	6	0	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
- +-----+-----+
D | Options for DASD EXCP Summary                | 001 of 00107
C |                                                | 11 ==> CSR
  | Enter "/" to select an option
  |   - Omit files for which no EXCPs were counted
  |     during the measurement interval. Unselect to
  |     include all files.                        | _____
D |                                                | asurement
S |                                                | 82
I | +-----+-----+                          | 0
```

Select this option to omit files from the report for which no I/O activity was observed. Deselect this option to display all files.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| INFILE      Non-VSAM              0      14      14|
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004

DDNAME          INFILE
Open Intent     INPUT
Dataset Name    USER1.TESTPF2.INFILE
Device Type     3390      Nbr of Extents  1
Volume Serial   BKNSM1     Dataset Org   PS
Block Size (BLKSIZE) 13,300  RECFM         FIXED BLOCKED
Record Size (LRECL) 133      Data Buffers  0

```

## D06 - DASD VSAM statistics

### Usage

Use this report to see file access statistics for each open VSAM data set.

### Quantification

Each report line shows a VSAM DDNAME and its associated file access statistics.

### Detail line hierarchy

There is only one detail line level in this report.

### Detail line descriptions

#### VSAM statistics

Each detail line shows the following information.

Under Heading	This is Displayed
DDNAME	The DDNAME of the file. If multiple OPENS occurred for the DDNAME, a separate line is reported for each "instance." A sequence number is appended to the DDNAME indicating the instance.
Retrvd	The number of records retrieved from the file during the measurement interval.
Added	The number of new records added to the file during the measurement interval.
Insrtd	The number of records inserted during the measurement interval. This count is also included in the 'added' record count.
Deletd	The number of records deleted from the file during the measurement interval.
Updatd	The number of updates to existing records during the measurement interval.
EXCPs	The number of EXCPs during the measurement interval.
FreeSpc	The change, in bytes, to the amount of free space during the measurement interval. This is shown as a plus or minus value to indicate if the free space increased or decreased.



Under Heading	This is Displayed
CISplts	The change in the number of CI splits during the measurement interval. This is shown as a plus or minus value to indicate if the number of CI splits increased or decreased.
CASplts	The change in the number of CA splits during the measurement interval. This is shown as a plus or minus value to indicate if the number of CA splits increased or decreased.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
D06: DASD VSAM Statistics (0650/TSTJOB01) Row 00001 of 00006
Command ==>> _____ Scroll ==>> CSR

```

DDNAME	Logical Records During Interval					EXCPs	+/- During Inte	
	Retrvd	Added	Insrtd	Deletd	Updatd		FreeSpc	CISplts C
FILEA	749	+0	0	0	0	0	+0	+0
DFHLCD	0	+0	0	0	0	0	+0	+0
DFHGCD	0	+0	0	0	0	0	+0	+0
DFHTEMP	0	+0	0	0	0	0	+0	+0
DFHINTRA	0	+0	0	0	0	0	+0	+0
DFHLRq	0	+0	0	0	0	0	+0	+0

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:



File View Navigate Help				
SHAREOPTIONS	(2 3)	Insrted Records	0	0
Organization	KSDS	Retrvd Records	0	0
CIs per CA	49	Updated Records	0	0
Free CIs per CA	0	Byter Free Space	24,576	24,576
Free Bytes per CI	0	Number of EXCPs	35	35
% Free CIs in CA	0%			
Shared Resource Pool Information for LSR Pool 1				
Type (Data/Index)	DATA	Reads	Initial	Last
Buffer Size	512	Reads Avoided	0	228
Buffers	8	User Writes	0	0
Hiperspace Buffers	0	Non-user Writes	0	0

## D07 - DASD activity timeline

**Note:** This report also covers TAPE I/O.

### Usage

Use this report to see, for each file, how I/O activity was distributed over the measurement interval.

### Quantification

A graph, in bar chart format, is displayed for each DDNAME. The horizontal axis represents the measurement interval which spans 50 columns. Each column represents an equal 1/50th sub-interval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows (roughly) how much I/O activity took place during the sub-interval. If any I/O activity did take place, a vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the sub-interval I/O was observed.

### Detail line descriptions


#### File I/O activity distribution

A group of lines is shown for each reported file. Some information about the file appears to the left and a bar chart to the right.

Under Heading	This is Displayed
File Information	File Information The following information is shown for each file. <ul style="list-style-type: none"> <li>• The DDNAME</li> <li>• Type of file (VSAM, non-VSAM, Tape, etc.)</li> <li>• Volser</li> <li>• Unit (device type)</li> </ul>
nnnn Samples: Duration ...	A graph showing the distribution of I/O activity over the measurement interval.

## Sample reports

A sample of the report is shown here:

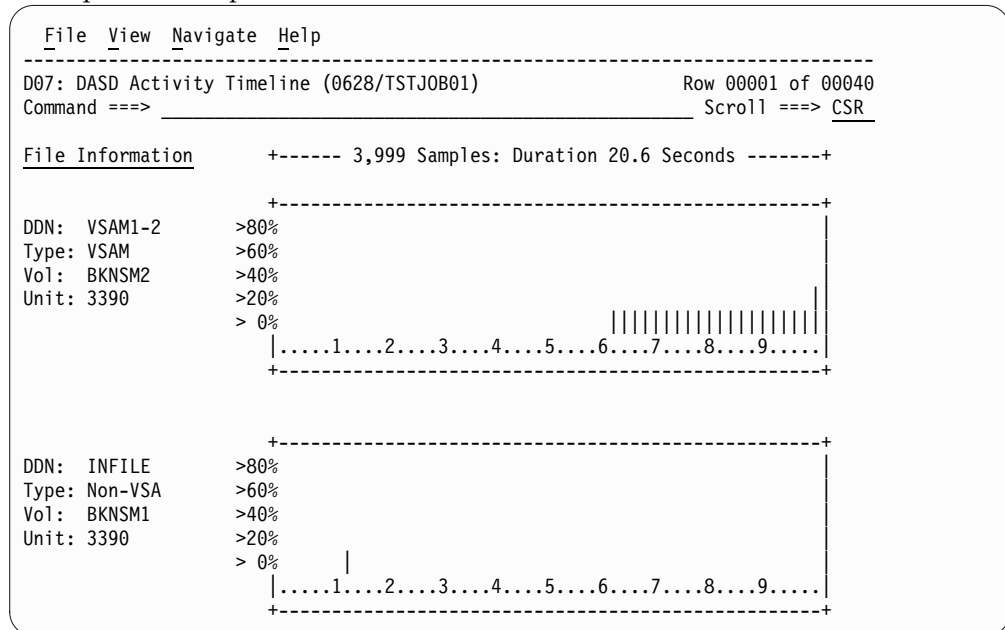

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
-----+-----
D | Options for DASD Activity Timeline | 001 of 00000
C |                                     | 11 ==> CSR
  | Enter "/" to select an option
  | / Omit files for which no I/O was observed
  | during the measurement interval. Unselect
  | to include all files.
  |
  |-----+-----

```

Select this option to omit from the report files for which no activity took place. This is the default option. Deselect this option to display all files, which will typically result in the display of numerous empty graphs.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
-----+-----
+-----+----- The following report line was selected -----+
| INFILE          Non-VSAM                0          14          14 |
+-----+-----+-----+-----+
Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004

  DDNAME          INFILE
  Open Intent     INPUT
  Dataset Name    USER1.TESTPF2.INFILE
  Device Type     3390      Nbr of Extents  1
  Volume Serial   BKNSM1    Dataset Org   PS
  Block Size (BLKSIZE) 13,300 RECFM          FIXED BLOCKED
  Record Size (LRECL) 133     Data Buffers  5

```

## D08 - DASD I/O wait time

### Usage

Use this report to examine delays resulting from waits during DASD I/O operations. Note: This report is not applicable to CICS.

### Quantification

Samples are counted in which the following conditions were observed:

- All TCBs (tasks) are in WAIT state
- One (or more) TCB is waiting for completion of a DASD I/O request

The number of samples satisfying these conditions divided by the total number of samples represents the percentage of time the step was waiting for completion of DASD I/O. These percentages are computed and reported by DDNAME.

## Detail line hierarchy

An unexpanded D08 report shows a line for each DDNAME causing a delay in execution while waiting for DASD I/O activity to complete. You can expand each line to reveal additional hierarchical levels of detail (using the "+" line command).

The hierarchy is illustrated here:

```
Level 1 DDNAME
  Level 2 File I/O Request
    Level 3 Supervisor Call (SVC)
      Level 4 Module
        Level 5 CSECT

Level 2 File I/O Request
  Level 3 Module
    Level 4 CSECT

Level 2 Supervisor Call (SVC)
  Level 3 Module
    Level 4 CSECT
```

## Detail line descriptions

### DDNAME

This line identifies the DDNAME of a file for which delays due to wait for I/O completion were observed.

Under Heading	This is Displayed
Description	The volume ID (VOLSER) for the DDNAME. For a multivolume data set, the first volume is displayed.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O for the indicated DDNAME.

### File I/O request

This line identifies the file request macro that caused a wait for I/O completion.

Under Heading	This is Displayed
Name	The DASD I/O macro function (GET, PUT, CHECK, etc.) that caused the wait.
Description	The address of the macro (return address) in CSECT+offset format.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O for the indicated macro.

### Load module

This line identifies the data management load module in which the wait occurred.

Under Heading	This is Displayed
Name	Name of load module in which WAIT request was issued.
Description	Functional description of the load module if one is available.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

## CSECT

This line identifies the CSECT in the data management load module in which the wait occurred.

Under Heading	This is Displayed
Name	Name of CSECT in which WAIT request was issued.
Description	Functional description of the CSECT if one is available.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

## Supervisor Call (SVC)

This line identifies an SVC (Supervisor Call) that issued the wait.

Under Heading	This is Displayed
Name	Name of SVC (Supervisor Call) in which WAIT request was issued.
Description	Functional description of the SVC.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

## Sample reports

A sample of the report as it is first displayed is shown here:

```
File View Navigate Help
-----
D08: DASD I/O Wait Time (0099/TSTJOB01) Row 00001 of 00006
Command ==> Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±3.5%
          *....1....2....3....4....5....6....7....8.
VSOUT1    BKNSM1           7.07 ====
VSOUT2    BKNSM1           5.05 ===
VSOUT3    BKNSM1           3.03 ==
VSINP4    BKNSM1           1.26 =
QSOUT5    BKNSM1           0.25
QSINP6    BKNSM1           0.12
```

Here is a sample of the report which has been fully expanded by entering the “+” line command on the Name heading:

```

File View Navigate Help
-----
D08: DASD I/O Wait Time (0099/TSTJOB01) Row 00001 of 00030
Command ==> Scroll ==> CSR

Name          Description          Percent of CPU time * 10.00% ±3.5%
*....1....2....3....4....5....6....7....8.
VSOUT1        BKNSM1                7.07 =====
→ PUT         U0053+C8              7.07 =====
  → IDA019L1   Virtual I/O (VI      7.07 =====
    → IDA019R3   CSECT in IDA0       7.07 =====

VSOUT2        BKNSM1                5.05 ===
→ PUT         U0053+194            5.05 ===
  → IDA019L1   Virtual I/O (VI      5.05 ===
    → IDA019R3   CSECT in IDA0       4.80 ==
      → IDA019RZ   CSECT in IDA0       0.25

VSOUT3        BKNSM1                3.03 =
→ PUT         U0053+266            3.03 =
  → IDA019L1   Virtual I/O (VI      3.03 =
    → IDA019R3   CSECT in IDA0       3.03 =

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DDName, File I/O Request, Load Module, CSECT, SVC	Display context help information.
++	DDName, File I/O Request, Load Module, CSECT, SVC	Show additional details.
+	DDName, File I/O Request, Load Module, SVC	Expand to reveal next level.
-	DDName, File I/O Request, Load Module, SVC	Collapse to hide next level.
SV	DDName, File I/O Request	Sort next level by value.
SN	DDName, File I/O Request	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	CSECT	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of Time	Zoom out scale.



Cmd	When Applied To Object	Action
SV	Name, Description, Percent of Time	Sort next level by value.
SN	Name, Description, Percent of Time	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| VSAM1      BKNSM2      4.04 00      |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
Calculation Details
Data management CPU measurements      124
I/O unit type                          DASD
Servicing I/O requests for DD Name     VSAM1
Total measurements                     3,063
Percent of total                       4.04%

VSAM file VSAM1 OPENed at 7:27:14.84 Friday Oct 7 2005

DDNAME          VSAM1
Open Intent     KEY,DIR,OUT
Dataset Name    USER1.DATA.TESTPF.DAT
Storage Class   BKNSMS
Device Type     3390
% Free Bytes in CI  10%
Volume Serial   BKNSM2  CI Splits    0          0
CI Size        8,192  CA Splits    0          0
Record Size (LRECL) 80    Logical Records 8          7,282
Number of Extents  1    Deleted Records 1          1
SHAREOPTIONS      (1 3)  Insrted Records 0          0
Organization      KSDS   Retrved Records 1          1
CIs per CA        78    Updated Records 0          0
Free CIs per CA   11    Bytes Free Space 1,908,736  1,327,104
Free Bytes per CI 819    Number of EXCPs 13          7,287
% Free CIs in CA  15%
Strings          1
DATA Buffers     2
INDEX Buffers    1

Index Component of VSAM1

```

File View Navigate Help				
Dataset Name	USER1.DATA.TESTPF.IDX			
Storage Class	BKNSMS			
Device Type	3390			
% Free Bytes in CI	0%	Initial	Last	
Volume Serial	BKNSM2	CI Splits	0	0
CI Size	1,024	CA Splits	0	0
Record Size (LRECL)	1,017	Logical Records	1	1
Number of Extents	1	Deleted Records	0	0
SHAREOPTIONS	(1 3)	Insrted Records	0	0
Organization	KSDS	Retrvd Records	0	0
CI's per CA	33	Updated Records	0	71
Free CIs per CA	0	Bytes Free Space	32,768	32,768
Free Bytes per CI	0	Number of EXCPs	4	75
% Free CIs in CA	0%			

## D09 - VSAM buffer pool usage

### Usage

Use this report to see information about activity in VSAM LSR buffer pools.

A buffer pool number can be associated with a VSAM file. This is indicated in the Open Intent field in any reports that show detailed file information. For example, report D04 might show the following:

```
KEY,DSN,DIR,SEQ,SKP,OUT,NLW,LSR SHRPOOL=1
```

This indicates the file uses shared buffer pool number 1. Refer to report D09 to examine how effectively the buffer pool was able to reduce the I/O activity for the associated file(s).

For each buffer pool, activity is quantified for each buffer size and type (DATA or INDEX component). The buffer size corresponds to the CI size for the associated file component. VSAM will choose buffers which are at least as large as and closest in size to the CI size.

### Quantification

The following values are reported.

Under Heading	This is Displayed
Type	DATA or INDEX. This indicates if the buffers are for VSAM DATA or INDEX components
Buffer Size	The buffer size, in bytes.
Buffers	The number of buffers in virtual storage.
Hiperspace™ Buffers	The number of buffers in Hiperspace.
Reads	The number of physical reads to the file. This is the number of reads that could not be avoided because no buffer contained a copy of the CI. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.

Under Heading	This is Displayed
Reads Avoided	The number of avoided reads (look-asides). This is the number of reads avoided because copies of the referenced CIs were found in the buffer pool. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval. High values indicate the buffer pool was effective in causing I/O operations to be avoided.
User Writes	The number of physical writes performed to the file at the request of the user program. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.
Non-user Writes	The number of forced physical writes performed to the file. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.

## Sample reports

A sample of the report is shown here:

```

File View Navigate Help
-----
D09: VSAM Buffer Pool Usage (5096/TSTJOB01) Row 00001 of 00022
Command ==> _____ Scroll ==> CSR

Shared Resource Pool Information for LSR Pool 1

Type (Data/Index)  INDEX  Reads      Initial    Last      Difference
Buffer Size        512    Reads Avoided 260279    270299    10020
Buffers            5      User Writes    0         0         0
Hiperspace Buffers 0      Non-user Writes 0         0         0

Type (Data/Index)  DATA  Reads      576       609       33
Buffer Size        8192  Reads Avoided 259704    269691    9987
Buffers            5      User Writes    0         0         0
Hiperspace Buffers 0      Non-user Writes 0         0         0

Type (Data/Index)  INDEX  Reads      0         0         0
Buffer Size        8192  Reads Avoided 0         0         0
Buffers            5      User Writes    0         0         0
Hiperspace Buffers 0      Non-user Writes 0         0         0

Type (Data/Index)  DATA  Reads      0         0         0
Buffer Size        20480 Reads Avoided 0         0         0
Buffers            5      User Writes    0         0         0
Hiperspace Buffers 0      Non-user Writes 0         0         0

```

## G01 - Coupling facility summary

### Usage

Use this report to see a summary of the coupling facility data collected during the observation session.

## Facility summary

Fields under this heading summarize the storage and usage of the coupling facility by facility name. The facility name is listed in the heading.

Under Heading	This is Displayed
CF Storage	Total coupling facility storage
CF Storage Used	Total used coupling facility storage.
CF Dump Storage	Total coupling facility storage dump space.
CF Storage for Structures	Total coupling facility storage used by structures.
Subchannel Contention Count	Count of times a free subchannel was not available for synchronous immediate operations.
Subchannel Contention Time uSec	Amount of time in microseconds waiting for a free subchannel for synchronous immediate operations (u-sec).
Failed Request Count	Count of the number of summed times – for unsuccessful operations.
Failed Request Time uSec	Summed service time of unsuccessful operations (u-sec).
Number of Processors	Number of processors used by the coupling facility.
Processor Utilization	Processor utilization of coupling facility processors expressed as a percentage of the sampling time.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
G01: Coupling Facility Statistics (0003/TSTJOB01)          Row 00001 of 00023
Command ==> _____ Scroll ==> CSR

Facility Summary - CFCC1
CF Storage                74,496K
CF Storage Used           9,216K
CF Dump Storage           2,048K
CF Storage for Structures  7,168K
Subchannel Contention Count  0
Subchannel Contention Time uSec  0
Failed Request Count       0
Failed Request Time uSec    0
Number of Processors       1
Processor Utilization      0%

Facility Summary - CFCCC2
CF Storage                74,496K
CF Storage Used           2,048K
CF Dump Storage           2,048K
CF Storage for Structures  0K
Subchannel Contention Count  0
Subchannel Contention Time uSec  0
Failed Request Count       0
Failed Request Time uSec    0
Number of Processors       1
Processor Utilization      51%

```

---

## G02 - Coupling facility mean times

### Usage

Use this report to see an analysis of how time was spent by the Coupling Facility during the observation session. Expand a Coupling Facility report line to see a further breakdown by structure name within the facility name.

### Quantification

Each report line quantifies time as arithmetic means for each measured facility. The means are calculated by dividing the total of all time spent servicing the facility by its number of requests. The means are expressed in units of micro-seconds.

### Detail line hierarchy

An unexpanded G02 report shows a line for each facility name in the Coupling Facility. You can expand each line to reveal an additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

**Level 1** Facility Name  
**Level 2** Structure Name

### Detail line descriptions

#### Facility detail line

This is the first-level detail line. Each line shows information about a facility name in the coupling facility.

Under Heading	This is Displayed
Name	The facility name.
Requests - Sync	The number of synchronous operations to the coupling facility.
Requests - Async	The number of asynchronous operations to the coupling facility.
Requests - Queued	The number of queued operations to the coupling facility.
Requests - Delay	The number of operations to the coupling facility that were delayed for dump serialization.
uSeconds - Sync	Mean micro-seconds service time per synchronous operation to the coupling facility.
uSeconds - Async	Mean micro-seconds service time per asynchronous operation to the coupling facility.
uSeconds - Queued	Mean micro-seconds service time for operations queued for the coupling facility.
uSeconds - Delay	Mean micro-seconds service time for operation delays for dump serialization.

## Sample reports

A sample report is shown here:

```
File View Navigate Help
-----
G02: Coupling Facility Mean Service Times (0003/TSTJOB01) Row 00001 of 00002
Command ==>> _____ Scroll ==>> CSR

----- Number of Requests -----
Name      Sync  Asynch  Queued  Delay
CFCC1     4112    0       0       0
CFCC2      0       0       0       0

----- Mean uSeconds -----
Name      Sync  Asynch  Queued  Delay
CFCC1      1     0       0       0
CFCC2      0     0       0       0
```

---

## G03 - Coupling facility total times

### Usage

Use this report to see an analysis of how time was spent by the Coupling Facility during the observation session. Expand a Coupling Facility report line to see a further breakdown by structure name within the facility name.

### Quantification

Each report line quantifies total time for each measured facility. The totals are the sum of all structures within the facility name. The totals are expressed in units of microseconds.

### Detail line hierarchy

An unexpanded G03 report shows a line for each facility name in the Coupling Facility. You can expand each line to reveal an additional hierarchical level of detail (using the "+" line command). The hierarchy is illustrated here:

Level 1 Facility Name  
Level 2 Structure Name

### Detail line descriptions

#### Facility detail line

This is the first-level detail line. Each line shows information about a facility name in the coupling facility.

Under Heading	This is Displayed
Name	The facility name.
Requests - Sync	The number of synchronous operations to the coupling facility.
Requests - Asynch	The number of asynchronous operations to the coupling facility.
Requests - Queued	The number of queued operations to the coupling facility.
Requests - Delay	The number of operations to the coupling facility that were delayed for dump serialization.
uSeconds - Sync	Total micro-seconds service time per synchronous operation to the coupling facility.
uSeconds - Asynch	Total micro-seconds service time per asynchronous operation to the coupling facility.
uSeconds - Queued	Total micro-seconds service time for operations queued for the coupling facility.

Under Heading	This is Displayed
uSeconds - Delay	Total micro-seconds service time for operation delays for dump serialization.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
G03: Coupling Facility Total Service Times (0003/TSTJOB01) Row 00001 of 00002
Command ==>> _____ Scroll ==>> CSR

----- Number of Requests -----
Name      Sync  Asynch  Queued  Delay      Sync  Asynch  Queued  Delay
CFCC1     4112    0        0        0         4352    0        0        0
CFCC2         0     0        0        0          0     0        0        0

```

## K01- CPU SRB Usage by SRB Type

### Usage

Use this report to see how Service Request Block (SRB) units of work spend CPU time.

### Quantification

Each report line shows the normalized percentage of CPU time for zIIP, zAAP, and GPU processors, and the total. The normalization factor is used to express the CPU percentages of zAAP and zIIP as a percentage that a regular GPU uses for the same work. The percentage is multiplied by the normalization factor and then divided by 256.

### Detail Line Hierarchy

An unexpanded report shows sampled SRBs that are grouped by SRB type. The SRB types are:

- **CLIENT** - A CLIENT SRB is a preemptable SRB that runs in an address space but executes work on behalf of some other address spaces, which is called the client address space. All CLIENT SRBs are preemptable, but for the purpose of this report they are classified as CLIENT instead of PREEMPTABLE.
- **ENCLAVE** - An ENCLAVE SRB is an SRB that is scheduled into an enclave so that WLM and ENCLAVE can manage the SRB. All ENCLAVE SRBs are preemptable, but for the purpose of this report they are classified as ENCLAVE instead of PREEMPTABLE.
- **PREEMPTABLE** - PREEMPTABLE SRBs can be preempted by higher priority units of work.
- **FULLXM** - A FULLXM SRB receives a copy of the scheduling program's dispatchable unit access list, and it receives control in the scheduling program's current cross memory environment. FULLXM SRBs might also be MANAGED, but for the purpose of this report they are classified as FULLXM instead of MANAGED.
- **MANAGED** - A managed SRB (Global or Local) is created by IEAMSCHD. MANAGED might also be FULLXM, but type FULLXM instead of MANAGED is used .

- NON-PREEMPT - A NON-PREEMPT SRB cannot be preempted by other work units irrespective of their priority.

You can expand each line to reveal an additional hierarchical level of detail by using the + line command. The hierarchy is illustrated here:

```

Level 1 SRB Type
  Level 2 SRB EPA instance
    Level 3 SRB Execution Module
      Level 4 SRB Execution CSECT
  
```

## Detail Line Descriptions

### SRB Type detail line

This is the first-level detail line. Each line is for a specific SRB type as detailed in the previous section.

Under Heading	This is Displayed
Name	An abbreviated description of the SRB type.
Description	A full description of the SRB type.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB type.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB type.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB type.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB type.

### SRB EPA instance detail line

This is the second-level detail line that is shown directly under the SRB Type detail line. This line represents each unique SRB EPA and priority.

Under Heading	This is Displayed
Name	The name of load module that contains the SRB EPA. If the load module cannot be resolved, the address of the entry point of the SRB is displayed.
Description	If a DPA functional description is found for the module name, the description is reported under this heading. Otherwise 'Application SRB' is displayed.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB in the load module with the EPA.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB in the load module with the EPA.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB in the load module with the EPA.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB in the load module with the EPA.



### SRB Execution Module detail line

This is a third-level detail line that is shown directly under the SRB EPA instance detail line. This line represents a unique load module at this level.

Under Heading	This is Displayed
Name	The load module name that contains the SRB EPA. If the address is not resolved, NOSYMB is displayed.
Description	If a DPA functional description is found for the executing module name, the description is reported under this heading. Otherwise, 'Application Program' is displayed if the program is not in the DPA tables. If the address is unresolved, 'No Module Name' is displayed.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB in the executing load module.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB in the executing load module.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB in the executing load module.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB in the executing load module.

### SRB Execution CSECT detail line

This is a fourth-level detail line that is shown directly under the SRB Execution Module detail line. This line represents a csect in a load module. For unresolved addresses, activity for a 4k range of addresses is recorded.

Under Heading	This is Displayed
Name	The executing CSECT in the load module at the third level. The activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format 'HHHHHxxx' where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.
Description	If a DPA functional description is found for the module name, the description is reported under this heading. If the name of the CSECT is not in the DPA tables, 'CSECT in MMMMMMMM' is displayed where MMMMMMMM is the name of load module from level 3. For unresolved addresses, 'Unresolved Address' is displayed.

Under Heading	This is Displayed
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this CSECT in the load module at the third level.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this CSECT in the load module at the third level.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this CSECT in the load module at the third level.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this CSECT in the load module at the third level.

## Sample reports

A sample report that is expanded to level two is shown here.

```

-----
K01: CPU SRB Usage by SRB Type (0072/DBBGDIST)                               Row 00001 of 00024
Command ==>> _____ Scroll ==>> CSR
----- Normalized % of CPU Time -----
Name          Description          zIIP  zAAP  GPU  Total
ENCLAVE       Enclave SRBs          41.59 0.00 50.06 91.65
± DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 21.89 0.00 26.66 48.55
→DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 0.00 0.00 1.75 1.75
→DSNVSRX     Agent Services Manager 19.69 0.00 20.04 39.73
→DSNVSRX     Agent Services Manager 0.00 0.00 1.48 1.48
→DSNVSRX     Agent Services Manager 0.00 0.00 0.02 0.02
→DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 0.00 0.00 0.07 0.07
→DSNVSRX     Agent Services Manager 0.00 0.00 0.02 0.02
PREEMPTABLE   Preemptable SRBs      0.29 0.00 6.68 6.97
→DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 0.00 0.00 2.98 2.98
→DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 0.00 0.00 0.56 0.56
→DSNVSRX     Agent Services Manager 0.00 0.00 2.64 2.64
→DSNVSRX     Agent Services Manager 0.29 0.00 0.44 0.73
→DSNVSRX     Agent Services Manager 0.00 0.00 0.02 0.02
→DSNVGEPL    Asmc Global Entry Point List (nonexecutable Csect) 0.00 0.00 0.02 0.02
NON-PREEMPT  Non-Preemptable SRB   0.00 0.00 0.59 0.59
→BPXINLPA    OS/390 UNIX System Services 0.00 0.00 0.51 0.51
→IEA0TI00    Supervisor Control    0.00 0.00 0.07 0.07

```

## Line commands

The following tables summarize the line commands that are available in this report, and the objects and headings to which they apply. You can always enter a “/” on any input field to popup a menu of line commands that are available for that field.

Table 3. on objects

Cmd	When Applied To:	Action
?	SRB Type, SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display context help information.

Table 3. on objects (continued)

Cmd	When Applied To:	Action
++	SRB Type, SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display additional details.
+	SRB Type, SRB EPA Instance, SRB Execution Module	Expand to reveal next level.
-	SRB Type, SRB EPA Instance, SRB Execution Module	Collapse to hide next level.
SV	SRB Type, SRB EPA Instance, SRB Execution Module	Sort next level by value.
SN	SRB Type, SRB EPA Instance, SRB Execution Module	Sort next level by name
M	SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display load module information

Table 4. on headings

Cmd	When Applied To Heading	Action
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail Window

You can enter “++” or the **Enter** key on any line to display a popup window that contains additional information. A sample detail window for this report is shown here:

```

+-----+-----+
K01 - DETAIL Window (0072/DBBGDIST)                               Row 00001 of 00111
Command ==>                                                       Scroll ==> CSR
+-----+-----+
| ± DSNVGEPL Asmc Global Entry Point List   21.89 0.00 26.66 48.55 |
+-----+-----+

SRB Attributes
SRB EPA                DSNVGEPL+10010
SRB Type               Enclave SRBs
Major Prty             00F6
Minor Prty             0000

Calculation Details
zIIP/zAAP Normalization Factor      3,245/256

                                     Actual      Normalized      Normalized %
                                     Measurements Measurements of Total CPU

Divisor Calculation
(SETUP option: TCB+SRB)
Total SRB measurements              2,457          4,021          99.25
Total TCB measurements                30              30              0.74
Total for Divisor                    2,487          4,051          100.00

SRB measurements(for selected report line)
zIIP measurements                    70             887            21.89
zAAP measurements                     0               0              0.00
GPU measurements                     1,080          1,080          26.66
Total SRB measurements               1,150          1,967          48.55

Module Information for DSNVGEPL
Load Address      13F35000 to 13F58FFF
Module Size      147,456
Module Location  CSA
Program Group    DB2 Subsystem
Subgroup         Agent Services Manager
Function         Asmc Global Entry Point List (nonexecutable Csect)
+-----+-----+

```

## SETUP Options

A SETUP option is available. With this option, you can specify that calculate CPU percentages as a percentage of both TCB and SRB counts instead of SRB counts only.

---

## K02- CPU SRB Usage by PSW/ObjCode

### Usage

Use this report to see information about sampled SRB CPU execution at the machine instruction level.

### Quantification

Each report line quantifies SRB CPU usage as a percentage. Each percentage represents the ratio of SRB CPU consumption that is observed for the reported item to the total SRB CPU consumption that is measured in the address space.

### Detail Line Hierarchy

The first level detail line displays a PSW (Program Status Word) address value that the Measurement Task records when it actively observes SRB CPU. The SRB CPU usage observation at the same PSW address is accumulated and reported as a

single detail line. In addition to the PSW address value, a separate first level detail line is created if any of the following values are different:

- Execution in problem or supervisor mode
- Address mode (AMODE) 24, 31 or 64
- Address-space control: primary-space, AR mode, secondary-space or home-space
- PSW key
- SVC number if execution was in a supervisor call
- Object code at the PSW address

You can expand the first level detail line by using the + line command to display the object code at the PSW address. Object code is reported in the form of disassembled machine instructions. The Measurement Task displays a line for each machine instruction from 12 bytes of object code captured during the measurement. The PSW address points to the 6th byte of the 12 bytes; therefore, the first instructions that are reported precede the sampled instruction.

If alternate disassemblies are available, which depend upon the assumed start address, the disassemblies are listed with a subheading of "Alternate Disassembly".

## Detail Line Descriptions

### PSW Address Line

Each unique PSW address has one line. By default, the lines are sorted in descending sequence by SRB CPU activity.

Under Heading	This is Displayed
Address	The PSW address of the sampled instruction.
Module	The load module name at the sampled address. If the Measurement Task cannot determine the module name, 'Unknown' is displayed.
AM	The address mode (AMODE): 24, 31 or 64.
S/P	If execution is in a supervisor call, the SVC number is displayed. Or S or P that is followed by the storage key is displayed. S indicates supervisor mode and P indicates problem mode. For example, P8 indicates execution in problem mode in storage key 8.
AS	The address space control mode. AR indicates access-register mode, SS indicates secondary-space mode and HS indicates home-space mode. Blanks are displayed for primary-space mode.
ASID	If the storage was acquired by an address space other than the measured one or a foreign address space, the ASID (address space id) in the hexadecimal of the address space that acquired the storage at the PSW address is displayed. For example, the processing of an SQL request. Execution occurs in load modules fetched into storage by one of the DB2 address spaces.

Under Heading	This is Displayed
Percent of SRB CPU Time	The percentage of SRB CPU time that is observed at the indicated address.

## Machine Instruction line

Each line displays one machine instruction in disassembled format. These lines relate to the PSW address lines that are shown above. If alternate disassemblies are available, which depend upon the assumed start address, they are listed under the subheading of "Alternate Disassembly".

## Sample reports

A sample report is shown here.

```

-----
K02: CPU SRB Usage by PSW/ObjCode (0072/DBBGDIST)          Row 00001 of 07878
Command ==> _____          Scroll ==> CSR
-----
Address      Module      AM S/P AS ASID      Percent of CPU Time * 10.00% ±2.0%
              *....1....2....3....4....5....6....7..
014FC526    IRARMINT    31 S0              1.50
->IRARMIO1+0392    AD03 0250      STOSM 592(R0),3
->IRARMIO1+0396    18D5          LR   R13,R5
->IRARMIO1+0398    A7F4 0057      BRC  R15,87

012EDAF6    IEAVEPSS    31 S0              1.42
->IEAVEPSS+0AD0    98BC D040      LM   R11,R12,64(R13)
->IEAVEPSS+0AD4    07FE          BCR  R15,R14
->IEAVEPSS+0AD6    0DC0          BASR R12,R0
->IEAVEPSS+0AD8    A7CA 0918      AHI  R12,2328

```

## Line commands

The following tables summarize the line commands that are available in this report, and the objects and headings to which they apply. You can always enter a "/" on any input field to popup a menu of line commands that are available for that field.

Table 5. on objects

Cmd	When Applied To:	Action
?	Address	Display context help information.
+	Address	Expand to reveal next level.
-	Address	Collapse to hide next level.
M	Address	Display load module information.

Table 6. on headings

Cmd	When Applied To Heading	Action
?	Address, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
-	Address	Collapse to show only first level.
-	Percent CPU	Zoom outscale.
SV	Address	Sort next level by value.

Table 6. on headings (continued)

Cmd	When Applied To Heading	Action
SA	Address	Sort next level by address.

## Detail Window

You can enter “++” or the **Enter** key on any line to display a popup window that contains additional information. A sample detail window for this report is shown here:

```

+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
K02 - DETAIL Window (0072/DBBGDIST)                               Row 00001 of 00025
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 014FC526  IRARMINT 31 S0      1.50                               |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+

Calculation Details
CPU measurements          37
PSW address                014FC526
Total CPU measurements    2,457
Percent of total          1.50%

PSW Information
PSW Address                014FC526
Module Name                IRARMINT
Module Description         System resources manager (SRM)
CSECT Name                 IRARMIO1
Module+Offset              IRARMINT+136E
CSECT+Offset               IRARMIO1+0396
Addressing Mode (AMODE)    31 bit
Address Space Control      Primary Space
Problem/Supervisor Mode   Supervisor Mode

Machine Instructions
IRARMIO1+0392  AD03 0250      STOSM 592(R0),3
IRARMIO1+0396  18D5          LR   R13,R5 <- PSW address
IRARMIO1+0398  A7F4 0057      BRC  R15,87
  
```

## V01 - Measurement variance summary

### Usage

Use this report to analyze variances between multiple separate measurements. To gain access to variance reporting, issue the “V” line command from the Observation Session List. The “V” line command selects the base measurement for comparison. Prior to entering the line command you must previously tag at least one measurement by entering the “T” line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report quantifies variances between tagged measurements and the base measurement.

### Measurements analyzed

The first segment of the V01 report lists the measurements analyzed in the report. Each measurement is assigned a two-digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, the measurement to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

## **Variances**

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

### **CPU time TCB**

This report segment compares the TCB CPU times that were recorded by the operating system during the measurement sessions.

### **CPU time SRB**

This report segment compares the SRB CPU times that were recorded by the operating system during the measurement sessions.

### **EXCP requests**

This report segment compares the number of EXCPs that were processed during the measurement sessions.

### **Service units**

This report segment compares the number of service units recorded by the operating system during the measurement sessions.

### **Percentage of CPU active samples**

This report segment compares the percentage of samples during which one or more TCBs was executing CPU instructions.

### **Percentage of WAIT samples**

This report segment compares the percentage of samples during which all TCBs were in WAIT state.

### **Percentage of queued samples**

This report segment compares the percentage of samples during which no CPU activity was taking place but one or more TCBs was suspended and waiting to be dispatched.



## Sample reports

A sample report is shown here:

<u>File</u>	<u>View</u>	<u>Navigate</u>	<u>Help</u>		
-----					
V01: Measurement Variance Summary (2312/TSTJOB01)			Row 00001 of 00059		
Command ==>			Scroll ==> <u>CSR</u>		
The Following Measurements are Analyzed					
<u>Ref</u>	<u>ReqNum</u>	<u>Job Name</u>	<u>Date</u>	<u>Time</u>	<u>Description</u>
01	2312	TSTJOB01	Mar-30-2007	10:54	Test 2
02	2311	TSTJOB01	Mar-30-2007	10:52	Test 1
-----					
CPU Time TCB					
<u>Ref</u>	<u>CPU Time TCB</u>	<u>Variance</u>			
01	11.41 sec				
02	11.73 sec	+ 2 %			
-----					
CPU Time SRB					
<u>Ref</u>	<u>CPU Time SRB</u>	<u>Variance</u>			
01	1.52 sec				
02	1.61 sec	+ 5 %			
-----					
EXCP Requests					
<u>Ref</u>	<u>EXCP Requests</u>	<u>Variance</u>			
01	7,721				
02	7,710	- 0 %			
-----					
Service Units					
<u>Ref</u>	<u>Service Units</u>	<u>Variance</u>			
01	7,721				
02	7,710	+ 3 %			
-----					

Percentage of CPU Active Samples				
Ref	--- Sample Count ---		Percentage	Variance
	CPU Active	Total		
01	2,171	4,136	52.51%	
02	2,452	4,790	51.21%	- 2 %

---

Percentage of WAIT Samples				
Ref	--- Sample Count ---		Percentage	Variance
	ICB WAIT	Total		
01	1,739	4,136	42.06%	
02	1,979	4,790	41.33%	- 1 %

---

Percentage of Queued Samples				
Ref	--- Sample Count ---		Percentage	Variance
	Queued	Total		
01	224	4,136	5.41%	
02	357	4,790	7.45%	+ 37 % >>

## V02 - CICS variance summary

### Usage

Use this report to analyze variances in CICS data between multiple measurements. To gain access to CICS variance reporting, issue the "V" line command on a CICS measurement from the Observation Session List. The "V" line command selects the base measurement for comparison. Prior to entering the "V" line command you must previously have tagged at least one CICS measurement by entering the "T" line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report will quantify CICS data variances between tagged measurements and the base measurement.

### Measurements analyzed

The first segment of the V02 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

### Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

### **CICS Transaction Statistics**

This report segment displays the starting and ending task number in each measurement, the number of transactions counted and observed, and compares the transaction rate per second between measurements.

### **Mean Execution Time**

This report segment compares the mean execution time of all CICS transactions sampled during the measurement sessions

### **Mean Suspend Time**

This report segment compares the mean suspend time of all CICS transactions sampled during the measurement sessions.

### **Mean CICS Dispatch Delay Time**

This report segment compares the mean CICS dispatch delay time of all CICS transactions sampled during the measurement sessions.

### **Mean MVS Dispatch Delay Time**

This report segment compares the mean MVS dispatch delay time of all CICS transactions sampled during the measurement sessions.

### **Mean Service Time**

This report segment compares the mean service time of all CICS transactions sampled during the measurement sessions.

## **Sample reports**

The following sample report shows the variances between a base CICS measurement and 3 tagged CICS measurements.

The Following Measurements are Analyzed

Ref	ReqNum	Job Name	Date	Time	Description
01	5592	CICS32A	Aug-09-2010	12:36	Variance 1 (Base)
02	5593	CICS32A	Aug-09-2010	12:39	Variance 2
03	5594	CICS32A	Aug-09-2010	12:41	Variance 3
04	5595	CICS32A	Aug-09-2010	12:42	Variance 4

CICS Transaction Statistics

Ref	-Task Number-	--Transaction--	Rate	Variance
Ref	Start	End	Count	Obsvd
01	10,894	12,640	1,746	1,075
02	15,236	17,408	2,172	1,054
03	17,408	19,474	2,066	900
04	19,580	21,251	1,671	908

Rate	Variance
58.20 per sec	
74.89 per sec	+ 28 % >>
71.24 per sec	+ 22 % >
57.62 per sec	- 0 %

Mean Execution Time

Ref	Time	Variance
01	0.0225 sec	
02	0.0204 sec	- 9 %
03	0.0216 sec	- 4 %
04	0.0175 sec	- 22 % <

Mean Suspend Time

Ref	Time	Variance
01	1.4997 sec	
02	1.0826 sec	- 27 % <<
03	1.2369 sec	- 17 % <
04	0.5693 sec	- 62 % <<<

Mean CICS Dispatch Delay Time

Ref	Time	Variance
01	0.0337 sec	
02	0.4190 sec	+999 % >>>>>>>>
03	0.3559 sec	+956 % >>>>>>>>
04	0.9112 sec	+999 % >>>>>>>>

Mean MVS Dispatch Delay Time

Ref	Time	Variance
01	0.0051 sec	
02	0.0056 sec	+ 9 %
03	0.0058 sec	+ 13 % >
04	0.0055 sec	+ 7 %

Mean Service Time

Ref	Time	Variance
01	1.5610 sec	
02	1.5276 sec	- 2 %
03	1.6202 sec	+ 3 %
04	1.5035 sec	- 3 %

---

## V03 - DB2 variance summary

### Usage

Use this report to analyze variances in DB2 data between multiple measurements. To gain access to DB2 variance reporting, issue the "V" line command on a DB2 measurement from the Observation Session List. The "V" line command selects the base measurement for comparison. Prior to entering the "V" line command you must previously have tagged at least one DB2 measurement by entering the "T" line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report will quantify DB2 data variances between tagged measurements and the base measurement.

### Measurements analyzed

The first segment of the V03 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

### Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

### SQL calls sampled

This report segment displays the subsystem name and version of the DB2 subsystem being used, and compares the number of calls sampled during the measurement sessions.

### SQL observations

This report segment compares the number of samples taken while an SQL call was in-flight.

### SQL calls executed

This report segment compares the number of calls executed during the sample based on the REQCT count for the active threads.

### Avg SQL call rate

This report segment compares average SQL call rate per second.

### SQL calls counted

This report segment compares the number of calls counted by the DB2+ intercept during sampling. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL throughput**

This report segment compares the throughput rate of the samples based on the number of calls made during the time that SQL was active in the sample.

### **SQL service time**

This report segment compares the total service time of the samples while an SQL call was active. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL call max time**

This report segment compares the highest service time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL call min time**

This report segment compares the lowest service time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL CPU time**

This report segment compares the total CPU time used to process SQL calls. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL call max CPU**

This report segment compares the highest CPU time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

### **SQL call min CPU**

This report segment compares the lowest CPU time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

## **Sample reports**

The following sample report shows the variances between a base DB2 measurement and 2 tagged DB2 measurements.

The Following Measurements are Analyzed

Ref	ReqNum	Job Name	Date	Time	Description
01	5592	CICS32A	Aug-09-2010	12:36	Variance 1 (Base)
02	5593	CICS32A	Aug-09-2010	12:39	Variance 2
03	5594	CICS32A	Aug-09-2010	12:41	Variance 3

SQL calls sampled

Ref	----DB2----		Calls	Variance
	Subsys	Version	Sampled	
01	DB9G	9.1.0	1,205	
02	DB9G	9.1.0	635	- 47 % <<
03	DB9G	9.1.0	630	- 47 % <<

SQL observations

Ref	Count	Variance
01	1,338	
02	726	- 45 % <<
03	721	- 46 % <<

SQL calls executed

Ref	Count	Variance
01	5,871	
02	2,997	- 48 % <<
03	2,997	- 48 % <<

Avg SQL call rate

Ref	Rate	Variance
01	195.70 per sec	
02	100.23 per sec	- 48 % <<
03	100.23 per sec	- 48 % <<

## Avg SQL call rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	195.70 per sec	
02	100.23 per sec	- 48 % <<
03	100.23 per sec	- 48 % <<

## SQL calls counted

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	2,937	
02	1,500	- 48 % <<
03	1,500	- 48 % <<

## SQL throughput

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	1505.38 per sec	
02	1427.14 per sec	- 5 %
03	1427.14 per sec	- 5 %

## SQL service time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	3.9691 sec	
02	2.2327 sec	- 43 % <<
03	2.2025 sec	- 44 % <<

## SQL call max time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0174 sec	
02	0.0313 sec	+ 79 % >>>>
03	0.0157 sec	- 9 %



## SQL call max time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0174 sec	
02	0.0313 sec	+ 79 % >>>>
03	0.0157 sec	- 9 %

## SQL call min time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0003 sec	
02	0.0003 sec	
03	0.0003 sec	

## SQL CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	1.9055 sec	
02	0.9905 sec	- 48 % <<
03	1.0115 sec	- 46 % <<

## SQL call max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0033 sec	
02	0.0032 sec	- 3 %
03	0.0033 sec	

## SQL call min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0002 sec	
02	0.0003 sec	+ 50 % >>>
03	0.0002 sec	

## V04 - IMS variance summary

### Usage

Use this report to analyze variances in IMS data between multiple measurements. The IMS+ extractor must be active in the selected measurements to display meaningful variance data. To gain access to IMS variance reporting, issue the "V" line command on an IMS measurement from the Observation Session List. The "V" line command selects the base measurement for comparison. Prior to entering the "V" line command you must previously have tagged at least one IMS measurement by entering the "T" line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report quantifies IMS data variances between tagged measurements and the base measurement.

### Measurements analyzed

The first segment of the V04 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

## Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

### **Txn observations**

This report segment displays the subsystem name and version of the IMS subsystem being used, and compares the number of transactions sampled during the measurement sessions.

### **IMS Txns counted**

This report segment compares the number of transactions counted during the measurement sessions.

### **Transaction rate**

This report segment compares the transaction rate per second during the measurement sessions.

### **Txn throughput**

This report segment compares the transaction throughput rate per second based on the number of transactions counted by the transaction service time.

### **IMS Txn svc time**

This report segment compares the total service time while IMS transactions were active during the measurement sessions.

### **IMS Txn max svc**

This report segment compares the longest running IMS transaction during the measurement sessions.

### **IMS Txn min svc**

This report segment compares the shortest running IMS transaction during the measurement sessions.

### **IMS Txn CPU time**

This report segment compares the total CPU time used by all IMS transactions during the measurement sessions.

### **IMS Txn max CPU**

This report segment compares the highest CPU time for IMS transactions during the measurement sessions.

### **IMS Txn min CPU**

This report segment compares the lowest CPU time for IMS transactions during the measurement sessions.

**DLI observations**

This report segment compares the number of samples taken while a DLI call was in-flight.

**DLI call count**

This report segment compares the number of DLI calls counted during the measurement sessions.

**DLI call rate**

This report segment compares the DLI call rate per second during the measurement sessions.

**DLI call thruput**

This report segment compares the DLI call throughput rate per second based on the number of DLI calls counted by the DLI service time.

**DLI svc time**

This report segment compares the total service time for DLI calls during the measurement sessions.

**DLI max svc**

This report segment compares the longest running DLI call during the measurement sessions.

**DLI min svc**

This report segment compares the shortest running DLI call during the measurement sessions.

**DLI CPU time**

This report segment compares the total CPU time used by all DLI calls during the measurement sessions.

**DLI max CPU**

This report segment compares the highest CPU time for a DLI call during the measurement sessions.

**DLI min CPU**

This report segment compares the lowest CPU time for a DLI call during the measurement sessions.

**Sample reports**

The following sample report shows the variances between a base IMS measurement and 1 tagged IMS measurement.

The Following Measurements are Analyzed

<u>Ref</u>	<u>ReqNum</u>	<u>Job Name</u>	<u>Date</u>	<u>Time</u>	<u>Description</u>
01	5497	IMSAMPP1	Jul-06-2010	14:52	IMS+ (2)
02	5498	IMSAMPP1	Jul-06-2010	14:57	IMS+ (3)

---

Txn observations

<u>Ref</u>	<u>Subsys</u>	<u>Version</u>	<u>Txns Sampled</u>	<u>Variance</u>
01	IMSA	10.1.0	35	
02	IMSA	10.1.0	17	- 51 % <<<

---

IMS Txns counted

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	27	
02	16	- 40 % <<

---

Transaction rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	0.15 per sec	
02	0.08 per sec	- 46 % <<

---

Txn throughput

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	90.00 per sec	
02	160.00 per sec	+ 77 % >>>>

---

IMS Txn svc time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.3463 sec	
02	0.1850 sec	- 46 % <<

---

IMS Txn max svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0294 sec	
02	0.0213 sec	- 27 % <<

---

IMS Txn min svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0037 sec	+ 94 % >>>>

---

IMS Txn CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.2175 sec	
02	0.1246 sec	- 42 % <<

---

IMS Txn max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0152 sec	
02	0.0120 sec	- 21 % <

---

IMS Txn min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0023 sec	+ 21 % >

---

DLI observations

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	8	
02	3	- 62 % <<<

---

DLI call count

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	204	
02	100	- 50 % <<<

---

DLI call rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	1.13 per sec	
02	0.55 per sec	- 51 % <<<

---

DLI call thrupt

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	2040.00 per sec	
02	0.00 per sec	-100 % <<<<<

---

DLI svc time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.1201 sec	
02	0.0744 sec	- 38 % <<

---

DLI max svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0128 sec	
02	0.0100 sec	- 21 % <

---

DLI min svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0000 sec	
02	0.0000 sec	

---

DLI CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0484 sec	
02	0.0308 sec	- 36 % <<

---

DLI max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0023 sec	+ 21 % >

---

DLI min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0001 sec	
02	0.0001 sec	

---

## Chapter 4. CICS performance analysis reports

This section describes the CICS Performance Analysis Reports.

For information about ...	See ...
The CICS data extractor	"Overview of CICS data extractor"
E01 CICS session statistics	"E01 - CICS session statistics" on page 195
E02 CICS CPU and use count by program	"E02 - CICS CPU and use count by program" on page 198
E03 CICS CPU usage by transaction	"E03 - CICS CPU usage by transaction" on page 200
E04 CICS mean service time by transaction	"E04 - CICS mean service time by transaction" on page 207
E05 CICS total service time by transaction	"E05 - CICS total service time by Txn" on page 218
E06 CICS service time by task ID	"E06 - CICS service time by task ID" on page 229
E07 CICS wait by transaction	"E07 - CICS wait by Txn" on page 239
E08 CICS mean service time by terminal ID	"E08 - CICS mean service time by terminal ID" on page 241
E09 CICS total service time by terminal ID	"E09 - CICS total service time by terminal ID" on page 250
E10 CICS mean service time by user ID	"E10 - CICS mean service time by user ID" on page 259
E11 CICS total service time by user ID	"E11 - CICS total service time by user ID" on page 267
E12 CICS CPU/service time by transaction	"E12 - CICS CPU/service time by transaction" on page 274

---

### Overview of CICS data extractor

In order to use the CICS Performance Analysis Reports, the CICS data extractor must be turned on when the Observation Request is entered. You must select the CICS data extractor in the Schedule New Measurement panel, and enter the transaction name(s) or patterns you want to observe. For more information on entering an observation request for CICS, see "Panel 5 – Subsystems" on page 31.

There are two distinct types of data that Application Performance Analyzer gathers when the CICS extractor is active: Session statistics, and Transaction measurement data.

#### Session statistics

This data is a summary of how much CICS related activity occurred in the region during the Observation Session. The activity measured is directly related to services requested by in-flight transactions. The data provides an indication on the load (or stress level) that transactions are placing on the region. In a region that is idle, almost all these numbers would be zero. Data for the majority of these

statistics are gathered once at the start of the session and once at the end of the session. The statistics are then calculated by taking the delta of each set of data values.

## Transaction measurement data

There is one sample record created for each in-flight transaction during each sampling interval. A transaction is only sampled if it was specified when the Observation Request was created. For some reports the sample records are analyzed to produce CPU usage and Service Time by transaction. These reports describe the load that a transaction is placing on the CICS region.

The sample record consists of transaction state data captured during a sampling interval. This information is used to generate the Session Activity report. This report highlights the state of sampled transactions. State information includes:

1. Whether the transaction was running or suspended (active or not)
2. Module information where it was running
3. Module information where to be resumed if suspended
4. Information on the CICS service executing on behalf of the application (if applicable)

---

## CICS+ Extractor

CICS+ is a CICS measurement option (data extractor) in which the precise number of CICS transactions are counted during the measurement interval. It records the exact service time and CPU time for each transaction. This data is displayed in the E12 report only, and has no effect on the other CICS reports.

Activating the CICS+ option automatically activates the CICS option. The extractor applies to CICS TS 3.1 and above. Your installer may have chosen to limit access to this data extractor.

---

## Overview of CICS Multiple Address Space Support

CICS multiple address space (MASS) support allows you to measure and analyze multiple CICS regions simultaneously. Transaction data from multiple regions is merged to produce a set of 4 CICS reports showing multi-region activity. These reports are X01, X02, X03 and X04.

To enter CICS MASS observations:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter either a Job name/Pattern with an asterisk (\*) or a multi-job measurement with a percent (%) for the CICS regions you want to measure.
3. In Panel 4 – Active Jobs, if you entered an asterisk (\*) in the Job Name/Pattern field, select the CICS regions from the list of active jobs presented. If you entered a percent (%) in the Job Name/Pattern field, the CICS regions that match the pattern are displayed. It is not necessary to select the CICS regions in this case, unless you want to limit the measurement to specific CICS regions. The maximum number of regions you are permitted to select is determined during the installation of Application Performance Analyzer.
4. In Panel 2 – Options, select the CICS data extractor.
5. Complete any other relevant panels for your request. You can specify further CICS measurement criteria in Panel 5 – Subsystems.



Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts separate observation requests for each CICS region selected for measurement.

When the separate observation requests are completed, you can view the CICS MASS reports by using the tag (T) and report (S or R) commands.

- Tag up to 20 CICS region measurements to be included in the CICS MASS reports.
- Select one of the CICS region measurements for reporting, using the S or R command. This measurement does not have to be tagged.

In addition to the standard reports for the selected observation, Application Performance Analyzer generates the specific CICS MASS reports that show multi-region activity for all selected CICS regions.

---

## E01 - CICS session statistics

### Usage

Use this report to see a summary of the CICS measurement data collected during the observation session.

**Note:** Be aware that a reset of CICS statistics, if done during the measurement interval, can invalidate some of the values reported here.

### Detail line descriptions

#### Environmental Information

Fields under this heading describe characteristics of the CICS environment.

##### CICS Release

The CICS version and release.

#### Transaction Statistics

Some CICS processing statistical values are shown under this heading.

##### First Transaction TaskId

The value of the CICS TaskId at the beginning of the observation session.

##### Last Transaction TaskId

The value of the CICS TaskId at the end of the observation session.

##### Number of TaskId Increments

The difference between the first and last CICS TaskId.

##### Number of Observed Transactions

The number of transactions with unique CICS TaskId values observed. If this value does not correspond to the number of increments, it could be an indication that not all executed transactions were measured. Some transactions could have been excluded as specified in the measurement request or transactions can be missed if a sampling rate is chosen that is slower than the transaction throughput rate.

##### Transaction Rate

The average number of transactions per second during the measurement interval.

**Peak Active Transactions**

The maximum number of concurrently active transactions observed during the measurement interval.

**Peak Active Txns (Overall)**

The maximum number of concurrently active transactions that occurred during the entire execution of the CICS region.

**MaxTask**

The maximum number of concurrent transactions CICS is configured for.

**Mean Transaction Time**

The average service time for the transactions observed during the measurement interval.

The service time consists of:

**Execution Time**

The time a CPU is processing the transaction.

**Suspend Time**

The time the transaction is suspended by CICS.

**CICS Dispatch Delay Time**

The time the transaction is delayed by CICS.

**MVS Dispatch Delay Time**

The time execution is delayed by the MVS dispatcher.

**Service Time**

The sum of the execution time, the suspend time, and the delay time.

**Service Statistics**

These are counts of service requests issued by CICS programs during the measurement interval:

- Program Requests
- Terminal Messages
- Storage Getmains
- Storage Freemains
- File I/O Requests
- Temporary Storage Requests
- Transient Data Requests
- Journal Write Requests

**Exception or Critical Conditions**

These are counts of certain exception or critical conditions that occurred during the measurement interval:

- System Dumps
- System Dumps Suppressed
- Transaction Dumps
- Transaction Dumps Suppressed
- Storage Violations
- Short on Storage occurrences
- Times at MaxTask
- Times at Class MaxTask

## Transaction Counts

A list of each transaction code that was measured and the number of executions is shown here.

## Sample reports

A sample report is shown here:

```
File View Navigate Help
-----
E01: CICS Session Statistics (0866/CICS23A) Row 00001 of 00045
Command ==> _____ Scroll ==> CSR

Environmental Information
  CICS Release                CICS/TS 2.3

Transaction Statistics
  First Transaction TaskId    0002089
  Last Transaction TaskId    0002242
  Number of TaskId Increments 153
  Number of Observed Transactions 153
  Transaction Rate (per sec) 2.18
  Peak Active Txns (Observed) 1
  Peak Active Txns (Overall) 2
  MaxTask                    5

Mean Transaction Time (Execution + Suspend + Delay = Service)
  Execution Time              0.0727747
  Suspend Time                0.232708
  CICS Dispatch Delay Time    0.052427
  MVS Dispatch Delay Time     0.018062
  Service Time                0.375944

Service Statistics
  Program Requests            536
  Terminal Messages           305
  Storage Getmains            3,295
  Storage Freemains           3,279
  File I/O Requests           0
  Temporary Storage Requests  0
  Transient Data Requests     0
  Journal Write Requests      0

Exception or Critical Conditions
  System Dumps                0
  System Dumps Suppressed     0
  Transaction Dumps           0
  Transaction Dumps Suppressed 0
  Storage Violations          0
  Short on Storage occurrences 0
  Times at MaxTask            0
```

```
File View Navigate Help
-----
E01: CICS Session Statistics (0866/CICS23A) Row 00040 of 00047
Command ==> _____ Scroll ==> CSR

Transaction Counts

  TranId  Count
  -----  ----
  DNC1    151
  CESN     2
  CQRY     1
  CATA     1
```

---

## E02 - CICS CPU and use count by program

### Usage

Use this report to get CPU usage and call counts for CICS programs that were executing during the observation session.

### Quantification

Each report line displays the number of times a program was called by CICS services. The report will not show any calls using a direct method such as a branch and link register (BALR). Each report line also quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported program to the total CPU consumption measured in the address space.

Note that the sum of all the percentages will normally be less than 100 percent because only those CICS transactions being measured are quantified in the report, but the percentage is the portion of the total CICS region CPU consumption. Similarly, any CICS region CPU overhead not attributable to CICS transactions will not be quantified in the report.

A program name of "CICS" is used to quantify CPU consumption not directly attributable to a CICS program. A CICS program in this report is a program that is defined in the CICS System Definition (CSD) dataset.

**Note:** The E02 report cannot be directly compared to the C02 CPU Usage report because C02 reports CPU usage by module, and E02 reports CPU directly used by or attributable to a CICS program. For example, CPU time used while processing an EXEC CICS command would be reported in a DFH program in the C02 report, but would be attributed to the CICS application program making the call in the E02 report.

### Detail line hierarchy

The E02 shows one level, the detail lines cannot be expanded.

## Sample reports

A sample is shown here:

File View Navigate Help			
E02: CICS CPU and Use Counts by Pgm (3090/CICS23A)			Row 00001 of 00016
Command ==>		Scroll ==> CSR	
Name	Calls	Percent of CPU Time * 10.00% ±1.5%	
*....1....2....3....4....5....6....7....8....9..			
CICSDB2	300	36.82	=====
SAMPREAD	501	30.56	=====
DSN5CA0	30	10.05	=====
CSQCTRUE	0	4.09	==
DFHD2EX1	0	3.79	==
CICS	0	3.74	==
DB2DRVR	1	2.44	=
READDRVR	1	2.29	=
MQSAMP1	100	2.12	=
MQDRVR	1	1.54	=
SAMPBGN1	200	1.22	=
CSQ4CVK1	100	1.09	=
IMSDRVR	1	0.19	
DFHEMTD	1	0.00	
DFHEITMT	1	0.00	
DFHEMTP	1	0.00	

## Detail line descriptions

### CICS program name detail line

This is the only level for the detail line. Each line shows information about a CICS program for which CPU consumption was measured.

Under Heading	This is Displayed
Name	The CICS program name.
Calls	The number of times this program was called by another CICS program. The call must be done by an EXEC CICS API call.
Percent of CPU Time	The percentage of CPU time consumed during execution of the program.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
++	Load Module	Show additional details.
M	Load Module	Display load module information.

### on headings

Cmd	When Applied To Object	Action
?	Name, Percent CPU	Display context help information.

Cmd	When Applied To Object	Action
+	Percent CPU	Zoom in scale.
-	Percent CPU	Zoom out scale.
+	Percent CPU	Zoom in scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.
SC	Name	Sort by call count.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| SAMPREAD      501      30.56 ===== |
+-----+

Call count at start:      3
Call count at end:       504
Difference:               501
Load count:               0
CPU active samples:      1,225
Total CPU active:        4,008
+-----+

```

---

## E03 - CICS CPU usage by transaction

### Usage

Use this report to see how CPU consumption was distributed across the CICS transactions that were executing during the observation session.

Expand a CICS transaction report line to see a further breakdown by program, CICS command and SQL Request.

### Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item (transaction, program, CICS command or SQL request) to the total CPU consumption measured in the address space. The sum of all the percentages will normally be less than 100 percent because only those CICS transactions being measured are quantified in the report. But the percentage is the portion of the total CICS region CPU consumption.

Similarly, any CICS region CPU overhead not attributable to CICS transactions will not be quantified in the report.

## Detail line hierarchy

An unexpanded E03 report shows a line for each CICS transaction for which CPU usage was measured. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
Level 2 CICS Program
  Level 3 CICS Command
  Level 3 CICS Command

...
Level 2 CICS Program
Level 3 SQL Request
Level 3 SQL Request

...
Level 2 CICS Program
Level 3 DL/I Request
Level 3 DL/I Request

...
Level 2 CICS Program
Level 3 Module
Level 3 Module
Level 3 System Services

...
Level 2 CICS Program
Level 3 Adabas Request
Level 3 Adabas Request

...
Level 2 System Services
Level 3 Module
Level 3 Module
Level 3 System Services

...
```

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help			
E03: CICS CPU Usage by Transaction (0817/CICS23A)		Row 00001 of 00004	
Command ==>		Scroll ==> CSR	
Name	NTxns/Description	Percent of CPU time * 10.00%	±1.5%
		*....1....2....3....4....5....6....7	
DNC1	327	77.22	=====
FINQ	295	8.35	====

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS program) is shown here:

```

File View Navigate Help
-----
E03: CICS CPU Usage by Transaction (0817/CICS23A)          Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

Name  NTxns/Description          Percent of CPU time * 10.00% ±1.5%
      *....1....2....3....4....5....6....7
DNC1   327                    77.22 =====
→ PFSAMPC EXEC SQL          35.01 =====
→ DFHD2EX1 CICS Program     16.38 =====
→ PFSAMPB EXEC SQL           8.14 =====
→ PFSAMPA EXEC SQL           3.59 ==
→ PFSAMPA CICS Program       3.54 ==
→ CICS System Services      3.11 ==
→ PFSAMPB CICS Program       3.02 ==
→ PFSAMPA EXEC CICS          2.05 =
→ PFSAMPC CICS Program       1.89 =
→ CEECCICS EXEC CICS         0.34
→ PFSAMPB EXEC CICS          0.09
FINQ   295                    8.35 =====

```

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

```

File View Navigate Help
-----
E03: CICS CPU Usage by Transaction (0817/CICS23A)          Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

Name  NTxns/Description          Percent of CPU time * 10.00% ±1.5%
      *....1....2....3....4....5....6....7
DNC1   327                    77.22 =====
→ PFSAMPC EXEC SQL          35.01 =====
  → +1BE2 FETCH             13.29 =====
  → +662A FETCH              6.56 ==
  → +0F52 SELECT             3.36 ==
  → +6E9C SELECT             2.72 =
  → +1164 SELECT             2.33 =
  → +6C4C SELECT             1.89 =
  → +6248 SELECT             1.85 =
  → +1588 OPEN               1.55 =
  → +64D0 OPEN               0.89
  → +6752 CLOSE              0.29
  → +2348 CLOSE              0.22

```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which CPU consumption was measured.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Percent of CPU Time	The percentage of CPU time consumed during execution of the transaction.



## CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be CICS command lines, SQL requests, DL/I requests or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays "EXEC CICS." If lines grouped under this line are SQL request lines, this displays "EXEC SQL". If lines grouped under this line are DL/I request lines, this displays "EXEC DLI". Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if it is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Percent of CPU Time	The percentage of CPU time consumed while executing in the identified program during execution of the transaction under which the line appears.

## CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Percent of CPU Time	The percentage of CPU time consumed while executing the CICS command.

## SQL Request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL call. This is in +xxxx format. This field is always displayed in red
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Percent of CPU Time	The percentage of CPU time consumed while executing the SQL request.

### DL/I Request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I call. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Percent of CPU Time	The percentage of CPU time consumed while executing the DL/I request.

### Active module detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The name of the module that was executing.
Description	A functional description of the module if one is available.
Percent of CPU Time	The percentage of CPU time consumed while executing in the module within the grouping under which the detail line appears.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Percent of CPU Time	The percentage of CPU time consumed while executing the Adabas request.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
-	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Sort next level by name.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce description field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here, this one is for a CICS command:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > +2C70   RETURN           0.72 |
+-----+

Calculation Details
CICS Transaction                DNC1
CPU Measurements Servicing CICS Commands  21
Total Measurements              2906
Percent of total                 0.72%

Command Attributes
CICS Command                    EXEC CICS RETURN
Issued in Load Module           PFSAMPA
Return Offset in Module         +2C90
Name of CSECT                   PFSAMPA
Return Offset in CSECT         +2C70

The command execution measurement counts are
Executing (CPU active)          21
Suspended by CICS              0
Delayed
  CICS dispatch delay          0
  MVS delay (WAIT)             0
  MVS delay (Busy)             0

```

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +84D6   SELECT                               1,84 = |
+-----+

Calculation Details
CICS Transaction                DNC1
CPU Measurements Servicing DB2 SQL 168
Total Measurements              1980
Percent of total                 8.48%
These quantities represent measurements of CPU usage while
processing the indicated SQL requests.

SQL Statement Information
Subsystem name DSN1                Attach type SASS
Plan name     PFSAMPA              Plan BIND time Nov-28-04 14:11:17

DBRM name     PSSAMPC              DBRM token    17859595 06957A24
DBRM date/time Nov-25-04 14:49:42

Package ID    PFSAMPC              Location      CABNETDB24
Collectn name PFSAMPX2            Pkg BIND time no data

SQL function  SELECT              Static/dynamic Static
Precmplr stmt# 3155              DBRM section# 20
CSECT/module  PFSAMPC in PFSAMPC Offset of call 000084D6
Sample count  69                  SQL req count 172
SQL CPU time  0.28                Service time  0.43

SQL Statement:  SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM DEP
                WHERE XRATE = : H

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum CPU percentage

You can set this option to eliminate modules where the CPU percentage is below a certain threshold.

---

## E04 - CICS mean service time by transaction

### Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were executing during the observation session. Expand a CICS transaction report line to see a further breakdown by program, CICS command, DL/I request and SQL request.

### Quantification

Each report line quantifies time as arithmetic means for each measured transaction. The means are calculated by dividing the total of all time spent servicing all occurrences of a transaction by its number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

## Detail line hierarchy

An unexpanded E04 report shows a line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Transaction
Level 2 CICS Program
Level 3 CICS Command
Level 3 CICS Command

...

Level 2 CICS Program
Level 3 SQL Request
Level 3 SQL Request

...

Level 2 CICS Program
Level 3 DL/I Request
Level 3 DL/I Request

...

Level 2 CICS Program
Level 3 Module
Level 3 Module
Level 3 System Services

...

Level 2 CICS Program
Level 3 Adabas Request
Level 3 Adabas Request

...

Level 2 System Services
Level 3 Module
Level 3 Module
Level 3 System Services

...

```

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help						
E04: CICS Mean Service Time by Txn (0817/CICS23A)						Row 00001 of 00004
Command ==>					Scroll ==> CSR	
Name	NTxns	Description	Error	Execution	+ Suspend	+ Delay = Service
DNC1	327		± 5.5%	0.103	0.013	0.023 0.140
FINQ	295		± 5.8%	0.012	0.000	0.011 0.023

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS Program) is shown here:

```

File View Navigate Help
-----
E04: CICS Mean Service Time by Txn (0817/CICS23A) Row 00001 of 00004
Command ==> _____ Scroll ==> CSR

Name      NTxns Description      Error Execution + Suspend + Delay = Service
-----
DNC1      327                    ± 5.5%  0.103  0.013  0.023  0.140
→ PFSAMPC EXEC SQL                0.046  0.000  0.004  0.051
→ DFHD2EX1 CICS Program      0.021  0.011  0.002  0.035
→ PFSAMPB EXEC SQL                0.010  0.000  0.002  0.013
→ CICS     System Services  0.004  0.000  0.008  0.012
→ PFSAMPA CICS Program      0.004  0.000  0.002  0.007
→ PFSAMPA EXEC SQL                0.004  0.000  0.001  0.006
→ PFSAMPB CICS Program      0.004  0.000  0.000  0.004
→ PFSAMPC CICS Program      0.002  0.000  0.000  0.002
→ PFSAMPA EXEC CICS          0.002  0.000  0.000  0.002
→ CEECCICS EXEC CICS          0.000  0.000  0.000  0.000
→ PFSAMPB EXEC CICS          0.000  0.000  0.000  0.000

```

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

```

File View Navigate Help
-----
E04: CICS Mean Service Time by Txn (0817/CICS23A) Row 00001 of 00041
Command ==> _____ Scroll ==> CSR

Name      NTxns Description      Error Execution + Suspend + Delay = Service
-----
DNC1      327                    ± 5.5%  0.103  0.013  0.023  0.140
→ PFSAMPC EXEC SQL                0.046  0.000  0.004  0.051
→ +1BE2   FETCH                0.017  0.000  0.001  0.019
→ +662A   FETCH                0.008  0.000  0.000  0.009
→ +0F52   SELECT                0.004  0.000  0.000  0.005
→ +6E9C   SELECT                0.003  0.000  0.000  0.004
→ +1164   SELECT                0.003  0.000  0.000  0.003
→ +6C4C   SELECT                0.002  0.000  0.000  0.002
→ +6248   SELECT                0.002  0.000  0.000  0.002
→ +1588   OPEN                  0.002  0.000  0.000  0.002
→ +64D0   OPEN                  0.001  0.000  0.000  0.001
→ +6752   CLOSE                0.000  0.000  0.000  0.000
→ +2348   CLOSE                0.000  0.000  0.000  0.000

```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, a CPU was actively executing for the transaction.

Under Heading	This is Displayed
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL Request lines, DL/I Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
NTxns	If lines grouped under this line are CICS command lines, this displays "EXEC CICS". If lines grouped under this line are SQL request lines, this displays "EXEC SQL". If lines grouped under this line are DL/I request lines, this displays "EXEC DLI". Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if it is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Description	If this is a recognized CICS transaction, a functional description.
Execution	The mean time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.



Under Heading	This is Displayed
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

### CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

### SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function — SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

### DL/I request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I command. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Execution	The mean time, in seconds, CPU execution was observed while the DL/I request was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the DL/I request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the DL/I request was being processed. This includes execution, suspend and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
-	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here, this one is for a CICS command:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > +2C70   RETURN           0.000   0.000   0.000   0.000|
+-----+

Calculation Details
CICS Transaction                DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      26
(2) Duration of one sample interval           0.006003
(3) (1) × (2) = total time for command        0.156078
(4) Number of executions of transaction       342
(5) (3) ÷ (4) = mean time for the command     0.000456

Command Attributes
CICS Command                     EXEC CICS RETURN
Issued in Load Module             PFSAMPA
Return Offset in Module           +2C90
Name of CSECT                     PFSAMPA
Return Offset in CSECT            +2C70

The command execution measurement counts are
Executing (CPU active)             21
Suspended by CICS                  5
Delayed
  CICS dispatch delay             0
  MVS delay (WAIT)                 0
  MVS delay (Busy)                 0

```

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+----- The following report line was selected -----+
|  → +85D8      SELECT                0.001    0.000    0.000
+-----+

Calculation Details
CICS Transaction                DNC1
The quantities shown represent the service time for execution of the
indicated DB2 SQL call while processing this transaction. The
quantities are mean times for the SQL call for all executions of the
transaction and are calculated as follows:

(1) Times SQL call observed in txn/program    93
(2) Duration of one sample interval          0.006003
(3) (1) x (2) = total time for SQL call      0.558279
(4) Number of execution of transaction       342
(5) (3) ÷ (4) = mean time for the SQL call   0.001632

SQL Statement Information
Subsystem name DSN1                Attach type SASS
Plan name     PFSAMPA              Plan BIND time Nov-28-04 14:11:17

DBRM name     PSSAMPC              DBRM token    17859595 06957A24
DBRM date/time Nov-25-04 14:49:42

Package ID    PFSAMPC              Location      CABNETDB24
Collectn name PFSAMPX2            Pkg BIND time no data

SQL function  SELECT                Static/dynamic Static
Precmplr stmt# 3179                DBRM section# 21
CSECT/module  PFSAMPC in PFSAMPC    Offset of call 000085D8
Sample count  93                    SQL req count 172
SQL CPU time  0.28                Service time  0.54

SQL Statement:  SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM DEPT
                WHERE XRATE = : H

```

## E05 - CICS total service time by Txn

### Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were measured during the observation session. Expand a CICS transaction report line to see a further breakdown by program and by CICS command.

### Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

### Detail line hierarchy

An unexpanded E05 report shows a line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:



```

Level 1 CICS Transaction
Level 2 CICS Program
  Level 3 CICS Command
  Level 3 CICS Command

...
Level 2 CICS Program
  Level 3 SQL Request
  Level 3 SQL Request

...
Level 2 CICS Program
  Level 3 DL/I Request
  Level 3 DL/I Request

...
Level 2 CICS Program
  Level 3 Module
  Level 3 Module
  Level 3 System Services

...
Level 2 CICS Program
  Level 3 Adabas Request
  Level 3 Adabas Request

...
Level 2 System Services
  Level 3 Module
  Level 3 Module
  Level 3 System Services

...

```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL Request lines, DL/I Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays "EXEC CICS". If lines grouped under this line are SQL request lines, this displays "EXEC SQL". If lines grouped under this line are DL/I request lines, this displays "EXEC DLI". Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if it is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

### CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

### SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function — SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

### DL/I request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I command. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Execution	The total time, in seconds, CPU execution was observed while the DL/I request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the DL/I request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the DL/I request was being processed. This includes execution, suspend and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
E05: CICS Total Service Time by Txn (0817/CICS23A)          Row 00001 of 00004
Command ==>>> _____ Scroll ==>>> CSR

Name  NTxns Description          Error Execution + Suspend + Delay = Service
-----
DNC1   327                        ± 5.5% 33.736  4.419  7.649  45.805
FINQ   295                        ± 5.8%  3.649  0.000  3.379  7.029

```

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS Program) is shown here:

```

File View Navigate Help
-----
E05: CICS Total Service Time by Txn (0817/CICS23A)          Row 00001 of 00015
Command ==>>> _____ Scroll ==>>> CSR

Name  NTxns Description          Error Execution + Suspend + Delay = Service
-----
DNC1   327                        ± 5.5% 33.736  4.419  7.649  45.805
→ PFSAMPC EXEC SQL                  15.298  0.000  1.569  16.868
→ DFHD2EX1 CICS Program           7.159  3.709  0.869  11.738
→ PFSAMPB EXEC SQL                  3.559  0.000  0.949  4.509
→ CICS    System Services       1.359  0.089  2.799  4.249
→ PFSAMPA CICS Program           1.549  0.259  0.769  2.579
→ PFSAMPA EXEC SQL                  1.569  0.000  0.539  2.109
→ PFSAMPB CICS Program           1.319  0.179  0.079  1.579
→ PFSAMPC CICS Program           0.829  0.139  0.000  0.969
→ PFSAMPA EXEC CICS              0.899  0.009  0.039  0.949
→ CEECCICS EXEC CICS              0.149  0.019  0.029  0.199
→ PFSAMPB EXEC CICS              0.039  0.009  0.000  0.049

```

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

```

File View Navigate Help
-----
E05: CICS Total Service Time by Txn (0817/CICS23A)          Row 00001 of 00027
Command ==>>> _____ Scroll ==>>> CSR

Name  NTxns Description          Error Execution + Suspend + Delay = Service
-----
DNC1   327                        ± 5.5% 33.736  4.419  7.649  45.805
→ PFSAMPC EXEC SQL                  15.298  0.000  1.569  16.868
  → +1BE2  FETCH                   5.809  0.000  0.579  6.389
  → +662A  FETCH                   2.869  0.000  0.109  2.979
  → +0F52  SELECT                   1.469  0.000  0.239  1.709
  → +6E9C  SELECT                   1.189  0.000  0.129  1.319
  → +1164  SELECT                   1.019  0.000  0.189  1.209
  → +6C4C  SELECT                   0.829  0.000  0.109  0.939
  → +6248  SELECT                   0.809  0.000  0.079  0.889
  → +1588  OPEN                     0.679  0.000  0.059  0.739
  → +64D0  OPEN                     0.389  0.000  0.029  0.419
  → +6752  CLOSE                   0.129  0.000  0.019  0.149
  → +2348  CLOSE                   0.099  0.000  0.019  0.119

```



## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
-	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here, this one is for a CICS command:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > +2C70   RETURN           0.126   0.030   0.000   0.156|
+-----+

Calculation Details
CICS Transaction                DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program    26
(2) Duration of one sample interval         0.006003
(3) (1) x (2) = total time for command      0.156078

Command Attributes
CICS Command                     EXEC CICS RETURN
Issued in Load Module             PFSAMPA
Return Offset in Module          +2C90
Name of CSECT                    PFSAMPA
Return Offset in CSECT           +2C70

The command execution measurement counts are
Executing (CPU active)           21
Suspended by CICS                5
Delayed
  CICS dispatch delay           0
  MVS delay (WAIT)              0
  MVS delay (Busy)              0

```

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +6E9C   SELECT                               1.189   0.000   0.129 |
+-----+

Calculation Details
CICS Transaction                               DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times SQL call observed in txn/program    132
(2) Duration of one sample interval           0.009999
(3) (1) x (2) = total time for SQL call      1.319868

SQL Statement Information
DBRM name           PSSAMPC
DBRM token          17652081 1C3E933C
Precmplr stmt#     3179
SQL Call Module    PFSAMPC
SQL Call CSECT     PFSAMPC
SQL Call Offset    00006E9C
SQL Function       SELECT
Subsystem name     DSN1
Connection Type    SASS
Package/Plan:
  Location          CABNETDB24
  Collectn name     PFSAMPC6
  Package ID        PFSAMPC
  Plan name         PFSAMPA

SQL Req Count      105

SQL Statement:     SELECT *
                   INTO : H ,
                   : H : H ,
                   : H : H
                   FROM DEP
                   WHERE XRATE = : H

```

## E06 - CICS service time by task ID

### Usage

Use this report to see a chronology of occurrences of CICS transactions. Expand a CICS transaction report line to see a separate line for each execution of the transaction. Expand a task number report line to see a further breakdown by program, CICS command, SQL request and DL/I request.

### Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

### Detail line hierarchy

An unexpanded E06 report shows a line for each measured CICS transaction. You can expand each line to reveal a line for each occurrence of the transaction.

The hierarchy is illustrated here:

```

Level 1 CICS Transaction
Level 2 CICS Transaction Occurrence
  Level 3 CICS Program
    Level 4 CICS Command
    Level 4 CICS Command
    ...
  Level 3 CICS Program
    Level 4 SQL Request
    Level 4 SQL Request
    ...
  Level 3 CICS Program
    Level 4 DLI Request
    Level 4 DLI Request
    ...
  Level 3 CICS Program
    Level 4 Module
    Level 4 Module
    Level 4 System Services
    ...
  Level 3 CICS Program
    Level 4 Adabas Request
    Level 4 Adabas Request
    ...
  Level 3 System Services
    Level 4 Module
    Level 4 Module
    Level 4 System Services
    ...
Level 2 CICS Transaction Occurrence
  ...

```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

### CICS transaction number detail line

This detail line shows information about a single execution of the transaction.

Under Heading	This is Displayed
Name	The 'Task ID' of the transaction. This is a sequence number assigned to the transaction by CICS. CICS increments this value for each transaction execution. It serves as a unique transaction identifier.
Description	The time of day at which the transaction was executed.
Execution	The total time, in seconds, CPU execution was observed while the transaction was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines or module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays "EXEC CICS." If lines grouped under this line are SQL request lines, this displays "EXEC SQL." If lines grouped under this line are DLI request lines, this displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if it is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

### CICS command detail line

detail line These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

### SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.



Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the DLI request was being processed. This includes execution, suspend and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
E06: CICS Service Time by Task Id (0712/CICS23A)          Row 00001 of 00003
Command ==>>> _____ Scroll ==>>> CSR

----- Total Time in Seconds -----
Name  Count  Description      Error Execution + Suspend + Delay = Service
CKAM   1      16:34:50.97      ±99.9%  0.000  141.069  0.000  141.069
DNCI  72      16:34:51.87      ±11.9%  0.665  63.709  54.076  118.451
FINQ  174     16:34:53.55      ± 7.6%  1.576  0.035  73.506  75.118
  
```

By entering "+" on a transaction line, it is expanded into the CICS transaction occurrence detail line:

```

File View Navigate Help
-----
E06: CICS Service Time by Task Id (0712/CICS23A)          Row 00001 of 00177
Command ==>>> _____ Scroll ==>>> CSR

----- Total Time in Seconds -----
Name  Count  Description      Error Execution + Suspend + Delay = Service
CKAM   1      16:34:50.97      ±99.9%  0.000  141.069  0.000  141.069
DNCI  72      16:34:51.87      ±11.9%  0.665  63.709  54.076  118.451
FINQ  174     16:34:53.55      ± 7.6%  1.576  0.035  73.506  75.118
→ 01531 16:34:50.97      0.000  0.000  0.361  0.361
→ 01533 16:34:51.87      0.000  0.000  0.513  0.513
→ 01534 16:34:53.55      0.000  0.000  0.303  0.303
→ 01536 16:34:53.99      0.000  0.000  0.490  0.490
→ 01537 16:34:54.92      0.000  0.000  0.256  0.256
→ 01539 16:34:55.30      0.035  0.000  0.490  0.525
→ 01540 16:34:56.39      0.000  0.000  0.482  0.482
→ 01541 16:34:58.06      0.000  0.000  0.397  0.397
→ 01542 16:34:58.60      0.000  0.000  0.408  0.408
→ 01544 16:34:59.08      0.000  0.000  0.432  0.432
→ 01545 16:34:59.99      0.023  0.000  0.280  0.303
→ 01547 16:34:00.48      0.011  0.000  0.361  0.373
→ 01548 16:34:00.92      0.000  0.000  0.443  0.443
  
```

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Task ID, CICS Program	Display context help information.
++	Transaction, Task ID, CICS Program	Show additional details.
+	Transaction, Task ID, CICS Program	Expand to reveal next level.
-	Transaction, Task ID, CICS Program	Collapse to hide next level.
SV	Transaction, Task ID, CICS Program	Sort next level by value.
SN	Transaction, Task ID, CICS Program	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.

Cmd	When Applied To Object	Action
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| DNC1   342           ± 5.4%  15.547   1.596   3.373   20.518|
+-----+

Calculation Details
CICS Transaction                DNC1
The quantities shown represent the service time for executions of
this transaction. The service time is the sum of execution time,
suspend time and delay time. The quantities are total times for all
executions of the transaction and are calculated as follows:

(1) Number of times transaction observed      3418
(2) Duration of one sample interval          0.006003
(3) (1) × (2) = total time for transaction   20.518254

The transaction execution measurement counts are
Executing (CPU active)      2590
Suspended by CICS          266
Delayed
  CICS dispatch delay      125
  MVS delay (WAIT)         0
  MVS delay (Busy)         437

Measurement counts for service requests made by this transaction
Program requests           51
Terminal messages          0
Getmain requests           10
Freemain requests          11
File I/O requests          0
File suspends              0
Temporary storage requests 0
Transient data requests    0
Dump system requests       0
Dump transaction requests  0
Journal requests           0

```

## E07 - CICS wait by Txn

### Usage

Use this report to see where CICS transactions were waiting. Expand a CICS transaction report line to see a further breakdown by resource name.

## Quantification

Each report line quantifies accumulated wait as a percentage. Each percentage represents the ratio of wait time observed for the reported item (transaction or resource), to the total number of wait observations measured in the address space. There can be many wait observations recorded for the same CICS sample.

## Detail line hierarchy

An unexpanded E07 report shows a line for each CICS transaction which was observed to be in a wait. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command ).

The hierarchy is illustrated here:

**Level 1** CICS Transaction  
**Level 2** Wait Resource  
**Level 2** CICS Dispatch Delay  
**Level 2** MVS Delay (Wait)  
**Level 2** MVS Delay (Busy)

...

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction which was observed in a wait.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns/Description	The number of executions of the transaction, and if this is a recognized CICS transaction, a functional description.
Percent wait time	The percentage of wait observations for this transaction of the total number of wait observations for the region.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p><b>CICS</b> The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p><b>MVSWait</b> The entire region was in a wait for an MVS service.</p> <p><b>MVSBusy</b> The MVS system was busy and did not dispatch the CICS region.</p> <p><b>CICSSusp</b> The transaction has been suspended by CICS while waiting on a resource.</p>

## Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E07: CICS Wait by Txn (1623/CICS23A) Row 00001 of 00005
Command ==> _____ Scroll ==> CSR

Name  NTxns/Description          Percent of CPU time * 10.00% ±1.5%
*....1....2....3....4....5....6....7
DNC1   342                      24.80 =====
→ MVSBusy MVS Delay (Busy)        13.09 =====
→ CICSSusp Suspend                   7.51 ===
→ CICSDisp CICS Dispatch Delay 4.14 ==
→ MVSWait MVS Delay (Wait)          0.04

```

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Resource/Wait type	Display context help information.
++	Transaction, Resource/Wait type	Show additional details.
+	Transaction	Expand to reveal next level.
-	Transaction	Collapse to hide next level.
SV	Transaction	Sort next level by value.
SN	Transaction	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

---

## E08 - CICS mean service time by terminal ID

### Usage

Use this report to see an analysis of how time was spent on CICS terminals that were executing during the observation session. Expand a CICS terminal report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

### Quantification

Each report line quantifies time as arithmetic means for all measured transactions on the terminal. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions on the terminal by the number of

occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

## Detail line hierarchy

An unexpanded E08 report shows a line for each measured CICS terminal, and one line for all non-terminal-attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command
    ...
    Level 3 CICS Program
      Level 4 SQL Request
      Level 4 SQL Request
    ...
    Level 3 CICS Program
      Level 4 DLI Request
      Level 4 DLI Request
    ...
    Level 3 CICS Program
      Level 4 Module
      Level 4 Module
      Level 4 System Services
    ...
    Level 3 CICS Program
      Level 4 Adabas Request
      Level 4 Adabas Request
    ...
    Level 3 System Services
      Level 4 Module
      Level 4 Module
      Level 4 System Services
  
```

## Detail line descriptions

### CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This will be the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running while not attached to the terminal, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This will either be terminal transaction or nonterminal transaction.



Under Heading	This is Displayed
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The mean time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The mean time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	The mean time, in seconds, execution of the transactions on this terminal was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for transactions on this terminal, including execution, suspend, and delay time.

### CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines, or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
NTxns	The number of executions of the transaction.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines appear under a CICS program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.

Under Heading	This is Displayed
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction the CICS command was being processed. This includes execution, suspend, and delay time.

### SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction the DLI request was being processed. This includes execution, suspend and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.

Under Heading	This is Displayed
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E08: CICS Mean Service Time by Termid (2669/CICS23A) Row 00001 of 00005
Command ==> _____ Scroll ==> CSR
-----
Name  NTxns  Description      Error  Execution  Mean Time in  Seconds  -----
      + Suspend + Delay = Service
-----
ET38   342   Terminal Attached ± 5.4%  0.044    0.008    0.004    0.057
→ DNC1 342   Terminal Attached ± 5.4%  0.044    0.008    0.004    0.057
  → DFHD2EX1 CICS Program      0.013    0.003    0.000    0.018
  → PFSAMPA CICS Program      0.001    0.000    0.000    0.001
  → PFSAMPB CICS Program      0.000    0.000    0.000    0.001
  → CICS System Services    0.001    0.000    0.000    0.001
  → PFSAMPC CICS Program      0.000    0.000    0.000    0.001
  → PFSAMPA EXEC CICS        0.000    0.000    0.000    0.000
  → CEECCICS EXEC CICS        0.000    0.000    0.000    0.000
  → PFSAMPB EXEC CICS        0.000    0.000    0.000    0.000
  → PFSAMPC EXEC CICS        0.000    0.000    0.000    0.000

ET40   325   Terminal Attached ± 5.5%  0.042    0.007    0.005    0.056
→ DNC1 325   Terminal Attached ± 5.5%  0.042    0.007    0.005    0.056
  → DFHD2EX1 CICS Program      0.012    0.003    0.001    0.016
  → PFSAMPA CICS Program      0.001    0.000    0.000    0.001
  → PFSAMPB CICS Program      0.000    0.000    0.000    0.001
  → PFSAMPC CICS Program      0.000    0.000    0.000    0.001
  → CICS System Services    0.000    0.000    0.000    0.001
  → PFSAMPA EXEC CICS        0.000    0.000    0.000    0.000
  → PFSAMPB EXEC CICS        0.000    0.000    0.000    0.000
  → CEECCICS EXEC CICS        0.000    0.000    0.000    0.000
  → PFSAMPC EXEC CICS        0.000    0.000    0.000    0.000

ET33   122   Terminal Attached ± 9.0%  0.043    0.009    0.005    0.057
→ DNC1 122   Terminal Attached ± 9.0%  0.043    0.009    0.005    0.057
  → DFHD2EX1 CICS Program      0.004    0.001    0.000    0.006
  → PFSAMPC CICS Program      0.000    0.000    0.000    0.000
  → CICS System Services    0.000    0.000    0.000    0.000
  → PFSAMPA CICS Program      0.000    0.000    0.000    0.000
  → PFSAMPB CICS Program      0.000    0.000    0.000    0.000
  → PFSAMPA EXEC CICS        0.000    0.000    0.000    0.000
  → PFSAMPB EXEC CICS        0.000    0.000    0.000    0.000
  → CEECCICS EXEC CICS        0.000    0.000    0.000    0.000

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Load Module	Expand to reveal next level.
-	Terminal, Transaction, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Load Module	Sort next level by value.

Cmd	When Applied To Object	Action
SN	Terminal, Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +118E      RETURN TRANSID(DNC1)      0.000  0.000  0.000  |
+-----+

Calculation Details
CICS Transaction
The quantities shown represent the service time for execution
of the indicated CICS command while processing transaction DNC1.
The quantities are mean times for the command for all executions
of the transaction and are calculated as follows:

      (1) Times command observed in txn/program      6
      (2) Duration of one sample interval           0.009999
      (3) (1) × (2) = total time for transaction     0.059994
      (4) Number of executions of transaction        327
      (5) (3) ÷ (4) = mean time for the command     0.000183

Command Attributes
CICS Command          EXEC CICS RETURN TRANSID(DNC1)
Issued in Load Module PFSAMPA
Return offset in Module +11AE
Name of CSECT          PFSAMPA
Return of Offset in CSECT +118E

The command execution measurement counts are
Executing (CPU active) 5
Suspended by CICS     0
Delayed
  CICS dispatch delay 0
  MVS delay (WAIT)    0
  MVS delay (Busy)    1

```

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +85D8   SELECT                               0.001   0.000   0.000 |
+-----+

Calculation Details
The quantities shown represent the service time for execution
of the indicated DB2 SQL call while processing transaction DNC1.
The quantities are mean times for the SQL call for all executions
of the transaction and are calculated as follows:

(1) Times SQL call observed in txn/program      93
(2) Duration of one sample interval             0.006003
(3) (1) x (2) = total time for SQL call         0.558279
(4) Number of executions of transaction         342
(5) (3) ÷ (4) = mean time for the SQL call      0.001632

SQL Statement Information
Subsystem name DSN1                Attach type SASS
Plan name     PFSAMPA              Plan BIND time Nov-28-04 14:11:17

DBRM name     PFSAMPC              DBRM token    17859595 06957A24
DBRM date/time Nov-25-04 14:49:42

Package ID    PFSAMPC              Location      CABNETDB24
Collectn name PFSAMPX1            Pkg BIND time no data

SQL function  SELECT                    Static/dynamic Static
Precmplr stmt# 3179                DBRM section# 21
CSECT/module  PFSAMPC in PFSAMPC          Offset of call 000085D8
Sample count  93                          SQL req count 172
SQL CPU time  0.28                       Service time  0.54

SQL Statement  SELECT * INTO : H , : H , : H : H , : H FROM DEPT
              WHERE XRATE = : H

```

## E09 - CICS total service time by terminal ID

### Usage

Use this report to see an analysis of how time was spent on CICS terminals that were executing during the observation session. Expand a CICS terminal report line to see a further breakdown by transaction, program, CICS command, DLI request, and SQL request.

### Quantification

Each report line quantifies total times for transactions measured on a terminal. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

### Detail line hierarchy

An unexpanded E09 report shows one line for each measured CICS terminal, and one line for all nonterminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:



```

Level 1 CICS Terminal
Level 2 CICS Transaction
Level 3 CICS Program
Level 4 CICS Command
Level 4 CICS Command

...
Level 3 CICS Program
Level 4 SQL Request
Level 4 SQL Request

...
Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

...
Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

...
Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

...
Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services

```

## Detail line descriptions

### CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This will be the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running while not attached to the terminal, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This will either be terminal transaction or nonterminal transaction.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The total time, in seconds, a CPU was actively executing transactions on this terminal.
Suspend	The total time, in seconds, that CICS had suspended execution of transactions on this terminal.

Under Heading	This is Displayed
Delay	The total time, in seconds, execution of the transactions on this terminal was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for transactions on this terminal, including execution, suspend, and delay time.

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	The total time, in seconds, that execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction. This includes execution, suspend, and delay time.

### CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

### SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction the during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E09: CICS Total Service Time by Termid (2669/CICS23A)          Row 00001 of 00036
Command ==>>> _____ Scroll ==>>> CSR
-----
Name  NTxns  Description          Error  Execution  + Suspend  + Delay  = Service
-----
ET38   342   Terminal Attached  ± 5.4%  15.207    2.795     1.637    19.640
→ DNC1  342   ± 5.4%  15.207    2.795     1.637    19.640
  → DFHD2EX1  CICS Program          10.912    2.597     0.755    14.265
  → PFSAMPA   CICS Program          1.085     0.053     0.215     1.355
  → PFSAMPB   CICS Program          0.743     0.071     0.221     1.037
  → CICS      System Services       0.851     0.011     0.077     0.941
  → PFSAMPC   CICS Program          0.545     0.059     0.305     0.911
  → PFSAMPA   EXEC CICS             0.641     0.000     0.041     0.683
  → CEECCICS  EXEC CICS             0.179     0.000     0.017     0.197
  → PFSAMPB   EXEC CICS             0.179     0.000     0.000     0.179
  → PFSAMPC   EXEC CICS             0.065     0.000     0.000     0.065

ET40   325   Terminal Attached  ± 5.5%  13.893    2.555     1.775    18.224
→ DNC1  325   ± 5.5%  13.893    2.555     1.775    18.224
  → DFHD2EX1  CICS Program          10.120    2.417     0.803    13.341
  → PFSAMPA   CICS Program          0.791     0.017     0.257     1.067
  → PFSAMPB   CICS Program          0.737     0.017     0.215     0.971
  → PFSAMPC   CICS Program          0.557     0.041     0.317     0.917
  → CICS      System Services       0.689     0.059     0.089     0.839
  → PFSAMPA   EXEC CICS             0.653     0.000     0.065     0.719
  → PFSAMPB   EXEC CICS             0.161     0.000     0.011     0.173
  → CEECCICS  EXEC CICS             0.149     0.000     0.005     0.155
  → PFSAMPC   EXEC CICS             0.029     0.000     0.005     0.035

ET33   122   Terminal Attached  ± 9.0%  5.261     1.109     0.629     7.000
→ DNC1  122   ± 9.0%  5.261     1.109     0.629     7.000
  → DFHD2EX1  CICS Program          3.647     1.043     0.293     4.985
  → PFSAMPC   CICS Program          0.251     0.035     0.143     0.431
  → CICS      System Services       0.311     0.011     0.077     0.401
  → PFSAMPA   CICS Program          0.311     0.011     0.047     0.371
  → PFSAMPB   CICS Program          0.281     0.005     0.047     0.335
  → PFSAMPA   EXEC CICS             0.287     0.000     0.005     0.293
  → PFSAMPB   EXEC CICS             0.101     0.000     0.005     0.107
  → CEECCICS  EXEC CICS             0.041     0.000     0.005     0.047

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
-	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +118E   RETURN TRANSID(DNC1)      0.049   0.000   0.009 |
+-----+

Calculation Details
CICS Transaction          DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      6
(2) Duration of one sample interval           0.009999
(3) (1) × (2) = total time for transaction    0.059994

Command Attributes
CICS Command          EXEC CICS RETURN TRANSID(DNC1)
Issued in Load Module PFSAMPA
Return offset in Module +11AE
Name of CSECT         PFSAMPA
Return of Offset in CSECT +118E

The command execution measurement counts are
Executing (CPU active) 5
Suspended by CICS     0
Delayed
  CICS dispatch delay 0
  MVS delay (WAIT)    0
  MVS delay (Busy)    1

```

A sample detail window for an SQL command is shown here:



```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +6E9c  SELECT                               1.189   0.000   0.129 |
+-----+

Calculation Details
CICS Transaction          DNC1
The quantities shown represent the service time for execution of the
indicated DB2 SQL call while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times SQL call observed in txn/program    132
(2) Duration of one sample interval          0.009999
(3) (1) x (2) = total time for SQL call      1.319868

SQL Statement Information
DBRM name          PFSAMPC
DBRM Token         17652081 1C3E933C
Precmplr stmt#    3179
SQL Call Module   PFSAMPC
SQL Call CSECT   PFSAMPC
SQL Call Offset   00006E9C
SQL Function      SELECT
Subsystem name    DSN1
Connection Type   SASS
Package/Plan:
  Location        CABNETDB21
  Collectn Name   PFSAMPC6
  Package ID      PFSAMPC
  Plan Name       PFSAMPA

SQL Req Count:    105

SQL Statement:
SELECT *
INTO : H ,
: H : H ,
: H : H
FROM DEP
WHERE XRATE = : H

```

## E10 - CICS mean service time by user ID

### Usage

Use this report to see an analysis of how time was spent by CICS users that were executing during the observation session. Expand a CICS user ID report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

### Quantification

Each report line quantifies time as arithmetic means for all measured transactions initiated by the user. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions initiated by the user, by the number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

## Detail line hierarchy

An unexpanded E10 report shows one line for each measured CICS user. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS User ID
Level 2 CICS Transaction
Level 3 CICS Program
Level 4 CICS Command
Level 4 CICS Command

...
Level 3 CICS Program
Level 4 SQL Request
Level 4 SQL Request

...
Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

...
Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

...
Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

...
Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services
```

## Detail line descriptions

### CICS user detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS user ID.
NTxns	The number of executions of transactions initiated by this user.
Description	
Error	The margin of error for the mean values calculated by using the number of executions of transactions by this user as a sample size.
Execution	The mean time, in seconds, during which a CPU was actively executing transactions initiated by this user.
Suspend	The mean time, in seconds, during which CICS had suspended execution of transactions initiated by this user.

Under Heading	This is Displayed
Delay	The mean time, in seconds, during which execution of the transactions initiated by this user was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for transactions initiated by this user. This includes execution, suspend and delay time.

### CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, during which a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, during which execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The mean time, in seconds, during which CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend and delay time.

### CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, during which CPU execution was observed while the CICS command was being processed.

Under Heading	This is Displayed
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

### SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, during which CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.

Under Heading	This is Displayed
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, during which CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.

Under Heading	This is Displayed
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E10: CICS Mean Service Time by Userid (1873/CICS32A)          Row 00001 of 00032
Command ==>>> _____ Scroll ==>>> CSR

----- Mean Time in Seconds -----
Name  NTxns  Description          Error  Execution  + Suspend  + Delay  = Service
-----
AHM01   0
-> MQS1   0
   -> MQSAMP1  CICS Program          12.848    0.089    0.944    13.882
   -> CEECCICS EXEC CICS              1.888    0.119    0.479    2.488
   -> CEEPLPKA EXEC CICS              0.000    0.000    0.659    0.659
   -> CICS     System Services    0.104    0.089    0.239    0.434
   -> DFHTFP  CICS Program          0.059    0.000    0.000    0.059
   -> MQSAMP1 EXEC CICS              0.014    0.000    0.014    0.029

-> MQDR   0
   -> CSQ4CVK1 CICS Program          0.239    0.254    15.696    16.191
   -> MQDRVR  EXEC CICS              0.089    0.044    0.224    0.359
   -> MQDRVR  CICS Program          0.014    0.104    0.044    0.164
   -> CICS     System Services    0.014    0.000    0.000    0.014

-> TDB2   0
   -> CICS     System Services    0.329    2.413    6.506    9.250
   -> CICSDB3 CICS Program          0.989    0.899    1.769    3.658
   -> CEECCICS EXEC CICS              0.014    0.149    0.014    0.179
   -> CICSDB3 EXEC CICS              0.044    0.000    0.014    0.059

-> DBDR   0
   -> DB2DRVR EXEC CICS              0.074    0.239    1.574    1.888

AGM02   0
-> CKAM   0
   -> DFHMOMON EXEC CICS              0.000    29.984    0.000    29.984

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	User ID, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	User ID, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	User ID, Transaction, Load Module	Expand to reveal next level.
-	User ID, Transaction, Load Module	Collapse to hide next level.
SV	User ID, Transaction, Load Module	Sort next level by value.
SN	User ID, Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:



```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +06B8   PROGRAM(CSQ4CVK1)      0.014  0.044  0.104  0.164  |
+-----+

Calculation Details
CICS Transaction                MQDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      11
(2) Duration of one sample interval            0.014992
(3) (1) × (2) = total time for command         0.164912
(4) Number of executions of transaction        0
(5) (3) / (4) = mean time for the command     252.263688

Command Attributes
CICS Command                    EXEC CICS LINK PROGRAM(CSQ4CVK1)
Issued in Load Module            MQDRVR
Return offset in Module          +06D8
Name of CSECT                    MQDRVR
Return Offset in CSECT          +06B8

The command execution measurement counts are
Executing (CPU active)           1
Suspended by CICS                3
Delayed
  CICS dispatch delay            0
  MVS delay (WAIT)               0
  MVS delay (Busy)               7

```

## E11 - CICS total service time by user ID

### Usage

Use this report to see an analysis of how time was spent by CICS users that were measured during the observation session. Expand a CICS user ID report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

### Quantification

Each report line quantifies total times for transactions measured for a CICS user. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

### Detail line hierarchy

An unexpanded E11 report shows one line for each measured CICS user ID. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

- Level 1 CICS User ID
- Level 2 CICS Transaction
- Level 3 CICS Program
- Level 4 CICS Command
- Level 4 CICS Command

...

```

Level 3 CICS Program
Level 4 SQL Request
Level 4 SQL Request

...
Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

...
Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

...
Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

...
Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services

```

## Detail line descriptions

### CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS user for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS user ID.
NTxns	The number of executions of transactions initiated by this user.
Description	This is either Terminal Txn or Non-Terminal Txn.
Error	The margin of error for the mean values calculated by using the number of executions of transactions by this user as a sample size.
Execution	The total time, in seconds, during which a CPU was actively executing transactions initiated by this user.
Suspend	The total time, in seconds, during which CICS had suspended execution of transactions initiated by this user.
Delay	<p>The total time, in seconds, during which execution of the transactions initiated by this user was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for transactions initiated by this user. This includes execution, suspend and delay time.

### CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, during which a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction.
Delay	The total time, in seconds, during which execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

### CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, during which CPU execution was observed while transaction control was under the CICS program identified in the Name column.

Under Heading	This is Displayed
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The total time, in seconds, during which execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend and delay time.

### CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, during which CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

### SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, during which CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, during which CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report is shown here. The transaction has been expanded to the second level.

```

File View Navigate Help
-----
E11: CICS Total Service Time by Userid (1873/CICS32A)      Row 00001 of 00032
Command ==>>> _____ Scroll ==>>> CSR

Name  NTxns  Description          Error  Execution  + Suspend + Delay = Service
-----
AHM01    0
-> MQS1    0
  -> MQSAMP1  CICS Program          12.848  0.089  0.944  13.882
  -> CEECCICS EXEC CICS              1.888  0.119  0.479  2.488
  -> CEEPLPKA EXEC CICS              0.000  0.000  0.659  0.659
  -> CICS     System Services    0.104  0.089  0.239  0.434
  -> DFHTFP  CICS Program          0.059  0.000  0.000  0.059
  -> MQSAMP1 EXEC CICS              0.014  0.000  0.014  0.029

-> MQDR    0
  -> CSQ4CVK1 CICS Program          0.239  0.254  15.696  16.191
  -> MQDRVR  EXEC CICS              0.089  0.044  0.224  0.359
  -> MQDRVR  CICS Program          0.014  0.104  0.044  0.164
  -> CICS     System Services    0.014  0.000  0.000  0.014

-> TDB2    0
  -> CICS     System Services    0.329  2.413  6.506  9.250
  -> CICSDB3 CICS Program          0.989  0.899  1.769  3.658
  -> CEECCICS EXEC CICS              0.014  0.149  0.014  0.179
  -> CICSDB3 EXEC CICS              0.044  0.000  0.014  0.059

-> DBDR    0
  -> DB2DRVR EXEC CICS              0.074  0.239  1.574  1.888
  -> DB2DRVR EXEC CICS              0.074  0.239  1.574  1.888

AGM02    0
-> CKAM    0
  -> DFHMOMON EXEC CICS              0.000  29.984  0.000  29.984
  -> CKAM    0
  -> DFHMOMON EXEC CICS              0.000  29.984  0.000  29.984
  -> DFHMOMON EXEC CICS              0.000  29.984  0.000  29.984
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	User ID, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	User ID, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	User ID, Load Module	Expand to reveal next level.
-	User ID, Load Module	Collapse to hide next level.
SV	User ID, Load Module	Sort next level by value.
SN	User ID, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

## on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +0750  START TRANSID(MQS1)      0.014  0.000  0.000  0.014  |
+-----+

Calculation Details
CICS Transaction           MQDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      1
(2) Duration of one sample interval            0.014992
(3) (1) × (2) = total time for command        0.014992

Command Attributes
CICS Command              EXEC  CICS START TRANSID(MQS1)
Issued in Load Module     MQDRVR
Return offset in Module   +0770
Name of CSECT             MQDRVR
Return Offset in CSECT    +0750

The command execution measurement counts are
Executing (CPU active)    1
Suspended by CICS        0
Delayed
  CICS dispatch delay    0
  MVS delay (WAIT)       0
  MVS delay (Busy)       0
```

## E12 - CICS CPU/service time by transaction

### Usage

Use this report to see an analysis of how much time was used by the CICS transactions that were measured during the observation session. A prerequisite for this report is activation of the CICS+ option during the measurement. This option records exact CPU and service times for CICS transactions. Expand a CICS transaction report line to see a further breakdown by task number.



## Quantification

Each report line shows the following for each CICS transaction:

- Number of transactions executed
- Percentage of total CPU used for this transaction
- Total CPU used for this transaction
- Mean CPU used for this transaction
- Total service time for this transaction
- Mean service time for this transaction

## Detail line hierarchy

An unexpanded E11 report shows one line for each measured CICS user ID. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

**Level 1** CICS Transaction  
**Level 2** CICS Task Number  
**Level 2** CICS Task Number  
...

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
% of CPU	The percent CPU consumed by this transaction, out of the total recorded for this report.
CPU Time: Total	The total task CPU time for all tasks counted for this CICS transaction. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean task CPU time per CICS transaction. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Total	The total service time for all tasks for this CICS transaction. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per CICS transaction. Large numbers will be expressed in minutes with an M suffix.

### CICS task number detail line

This is the second-level detail line shown directly under the CICS transaction detail line. It quantifies the CPU and service time for each individual CICS task run under this transaction id.

Under Heading	This is Displayed
Name	The task number of the CICS transaction.
Description	The start time of the CICS transaction.
CPU Time: Total	The total task CPU time for this task.

Under Heading	This is Displayed
CPU Time: Mean	The mean task CPU time for this task. This is the same as the total time since it applies to only 1 task. This shows the CPU time to 5 decimal positions.
Svc Time: Total	The total service time for this task.
Svc Time: Mean	The mean service time for this task. This is the same as the total time since it applies to only 1 task. This shows the CPU time to 5 decimal positions.

## Sample reports

A sample report is shown here. The CICS transaction has been expanded to the second level (task number).

```

File View Navigate Help
-----
E12: CICS CPU/Service Time by Transaction (1860/CICS32A)      Row 00001 of 00603
Command ==>>> _____ Scroll ==>>> CSR

Name      NTxns Description          % of CPU    --CPU Time--    --Svc Time--
          Total Mean          Total Mean          Total Mean
TDB2      600
-> 08879   16:05:08.21          64.5%    4.25  0.00709    83.55  0.13925
-> 09180   16:05:20.52          0.01    0.01550    0.09  0.09333
-> 08883   16:05:08.22          0.01    0.01099    0.05  0.05510
-> 08880   16:05:08.21          0.00    0.00977    0.15  0.15520
-> 08880   16:05:08.21          0.00    0.00965    0.09  0.09113
-> 08901   16:05:08.46          0.00    0.00925    0.13  0.13706
-> 09185   16:05:20.54          0.00    0.00910    0.16  0.16997
-> 09013   16:05:09.75          0.00    0.00844    0.13  0.13625
-> 09283   16:05:21.42          0.00    0.00842    0.21  0.21626

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Task	Display context help information.
++	Transaction, Task	Show additional details.
+	Transaction	Expand to reveal next level.
-	Transaction	Collapse to hide next level.
SV	Transaction	Sort next level by value.
SN	Transaction	Sort next level by name.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.

Cmd	When Applied To Object	Action
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown below. This example shows a CICS task ID:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → 08879  16:05:08.21          0.01  0.01550  0.09  0.0933|
+-----+

CPU and Service Time for CICS Transaction
Transaction ID          TDB2
Start Time              16:05:08.21
Stop Time               16:05:08.30
Task Number             08879
Dispatch Time           0.04277
CPU Time                0.01550
Suspend Time            0.05055
Dispatch Wait Time      0.04030
File Control Requests   370064
DB2 Requests            3
IMS Requests            0
MQ Requests              0

```



---

## Chapter 5. IMS performance analysis reports

This section describes the IMS Performance Analysis Reports.

For information about ...	See ...
The IMS data extractor	"Overview of IMS data extractor" on page 280
The IMS+ extractor	"IMS+ extractor" on page 280
IMS Multiple Address Space Support (MASS)	"Overview of IMS Multiple Address Space Support" on page 280
I01 IMS measurement profile	"I01 - IMS measurement profile" on page 281
I02 IMS DL/I call timeline	"I02 - IMS DL/I call timeline" on page 286
I03 IMS transaction timeline	"I03 - IMS transaction timeline" on page 287
I04 IMS transaction activity timeline	"I04 - IMS transaction activity timeline" on page 289
I05 IMS DL/I CPU usage by PSB	"I05 - IMS DL/I CPU usage by PSB" on page 295
I06 IMS DL/I CPU usage by transaction	"I06 - IMS DL/I CPU usage by transaction" on page 298
I07 IMS DL/I CPU usage by DL/I call	"I07 - IMS DL/I CPU usage by DL/I call" on page 302
I08 IMS DL/I WAIT time by PSB	"I08 - IMS DL/I WAIT time by PSB" on page 305
I09 IMS DL/I WAIT time by transaction	"I09 - IMS DL/I WAIT time by transaction" on page 308
I10 IMS DL/I WAIT time by DL/I call	"I10 - IMS DL/I WAIT time by DL/I call" on page 311
I11 IMS DL/I activity by PSB	"I11 - IMS DL/I activity by PSB" on page 314
I12 IMS DL/I activity by transaction	"I12 - IMS DL/I activity by transaction" on page 317
I13 IMS DL/I activity by DL/I call	"I13 - IMS DL/I activity by DL/I call" on page 321
I14 IMS PSB/PCB attributes	"I14 - IMS PSB/PCB attributes" on page 324
I15 IMS DL/I call attributes	"I15 - IMS DL/I call attributes" on page 325
I16 IMS transaction service times	"I16 - IMS transaction service times" on page 326
I17 IMS transaction DL/I call counts	"I17 - IMS transaction DL/I call counts" on page 328
I18 IMS CPU/Svc time by DL/I calls	"I18 - IMS CPU/Svc time by DL/I calls" on page 330
I19 IMS CPU/Svc time by PSB	"I19 - IMS CPU/Svc time by PSB" on page 332
I20 IMS CPU/Svc time by transaction	"I20 - IMS CPU/Svc time by transaction" on page 334
I21 IMS CPU/Svc time by PCB	"I21 - IMS CPU/Svc time by PCB" on page 336

For information about ...	See ...
I22 IMS Region Transaction Summary	"I22 - IMS Region Transaction Summary" on page 338

---

## Overview of IMS data extractor

When the IMS data extractor is active all DL/I calls in the target address space are recorded each time a sample is taken. For each DL/I call in flight, all of the call parameters, SSAs etc, are recorded, as well as the module and offset from which the call was made. In a CICS region there can be multiple IMS threads active and so multiple DL/I calls can be recorded each time an IMS sample is taken in a CICS region.

Additionally, several IMS environment parameters are recorded each time a sample is taken. These parameters include, the region type and its status, the PSB, transaction code, IMS version and release, message sequence number and time stamp from the IOPCB. In the case of a CICS region, the scheduling and termination of PSBs is also recorded.

---

## IMS+ extractor

IMS+ is an IMS measurement option (data extractor) in which the precise number of DL/I calls is counted as well as the exact DL/I service time and CPU time by DL/I call. Activating the IMS+ option automatically activates the IMS option. Many of the IMS reports require that the IMS+ extractor be used.

**Note:** Running measurements with the IMS+ data extractor turned on causes each IMS call to be intercepted to collect additional data. This may have a small impact on the performance of the target address space. Care should be taken when using this feature with other products that also intercept IMS calls as unpredictable results may occur. Your installer may have chosen to limit access to this feature.

---

## Overview of IMS Multiple Address Space Support

IMS multiple address space (MASS) support allows you to measure an IMS transaction that is eligible to run in multiple MPP regions, either within a single IMS subsystem or within an IMSplex. You specify the IMS transaction and the IMS subsystem or IMSplex group name to measure. Application Performance Analyzer determines the MPP regions that are eligible to process the transaction and returns a list of active MPP regions in Panel 4. You select the regions you want to measure. Application Performance Analyzer creates a parent observation for each IMS subsystem and one child observation request for each selected MPP region grouped within the IMS subsystem.

To enter IMS MASS observations:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter a dash (-) in the Job name/Pattern field.
3. In Panel 5 – Subsystems, enter either the IMS subsystem ID or the IMSplex group name, and the IMS transaction code.
4. In Panel 4 – Active Jobs, Application Performance Analyzer returns a list of active MPP regions that are eligible to process the transaction. Select the MPP

regions you want to measure. The maximum number of regions you are permitted to select is determined during the installation of Application Performance Analyzer.

5. In Panel 2 – Options, select the IMS+ data extractor.
6. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts separate observation requests for each MPP region selected for measurement. The observations are displayed in the R02 Observation List as child observations under an IMS parent. You can view the IMS reports for each MPP region individually. When any of the selected MPP regions has not processed the IMS transaction during the measurement interval, the measurement has a status of Ended, with 1 Sample and no IMS reports are generated.

The NEW line command can be entered on any of the child observations or the IMS parent. When the NEW command is entered on a child observation, the new request is considered a single region request with a transaction code specification, and is initialized with the same parameter values as the original request. When the NEW line command is entered on the IMS parent of a single IMS subsystem, the new request is considered an IMS MASS request and is initialized with the same parameter values as the original request for a single IMS subsystem. The Panel 4 Active Jobs list is populated with the eligible MPP regions at the time of the new request and the desired regions must be selected from the list.

## I01 - IMS measurement profile

### Usage

Use this report to see a general overview of the IMS measurement data. This is a good report to examine first when analyzing IMS information. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. Information about the IMS environment is shown at the top of this report. This is followed by a series of mini performance graphs illustrating various types of measured activity.

### IMS environment

This does not appear if the measurement was for a CICS region.

Under Heading	This is Displayed
DFSRRRC00 parms	The PARM data that was passed to DFSRRRC00 (the IMS region controller) in the EXEC statement.
IMS system ID	The system name of the IMS subsystem under which the measured activity took place.
IMS region name	The JOB name/STC name of the IMS dependent region.
IMS version	The IMS version.
IMS region type	The type of dependent region: BMP, MPP, etc.

### Performance graphs

These are histograms quantifying measurement data. To the right of some of the graphs, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

## Most active IMS PSBs

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS PSB Name	An IMS PSB name is shown and the number of samples in which processing of DL/I calls under this PSB was observed. The percentage and the graph represent the proportion of the overall measurement time DL/I calls were being serviced under this PSB.

## Most active IMS transactions

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS Transaction Code	An IMS transaction code is shown and the number of samples in which processing of DL/I calls under this transaction was observed. The percentage and the graph represent the proportion of the overall measurement time DL/I calls were being serviced in this transaction.

## Most active DL/I calls

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DL/I Call	A DL/I call identified by three fields: a unique sequence number assigned to the DL/I call, its DL/I function code and its PCB name. The percentage and the graph represent the proportion of samples in which processing this DL/I call was observed. The percentage and the graph represent the proportion the overall measurement time all executions of this DL/I call were being serviced.

## Most CPU consumptive DL/I

Under Heading	This is Displayed
Total DL/I CPU Time	The number of seconds of CPU time consumed by all executions of DL/I calls during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.



Under Heading	This is Displayed
DL/I Call	A DL/I call identified by three fields: a unique sequence number assigned to the DL/I call, its DL/I function code and its PCB name. The quantification and the graph show the number of CPU seconds of execution for this DL/I call.

### Most frequent transactions

This requires that the IMS+ measurement option is active and the execution of IMS transaction was observed. The graphic information is based on the number of transactions counted.

Under Heading	This is Displayed
Total txns counted	The total number of IMS transactions counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS transaction	The IMS transaction code and the number of executions of this transaction.

### Most frequent DL/I calls

This requires that the IMS+ measurement option was active. The graphic information is based on the number of DL/I calls counted.

Under Heading	This is Displayed
Total DL/I calls counted	The total number of DL/I calls counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DL/I call	A DL/I call identified by three fields: a unique sequence number assigned to the call, its DL/I function code and its PCB name. The number of executions of this call is quantified.

## Transaction statistics

This requires that the IMS+ measurement option was active and the execution of IMS transaction was observed.

Under Heading	This is Displayed
IMS Txns counted	The number of IMS transactions counted during the measurement interval.
Transaction rate	The average rate, in transactions per second, at which transactions were processed during the measurement interval.
Txn observations	The number of samples transaction execution was observed.
Txn throughput	The theoretical transaction throughput, in transactions per second, based on the number of counted transactions divided by the number of seconds transactions were executing.
IMS Txn svc time	The total service time for all observed transactions.
IMS Txn CPU time	The total CPU time consumed by all observed transactions.
IMS Txn max svc	The maximum service time observed for a single transaction execution.

<b>Under Heading</b>	<b>This is Displayed</b>
IMS Txn max CPU	The maximum CPU time observed for a single transaction execution.
IMS Txn min svc	The minimum service time observed for a single transaction execution.
IMS Txn min CPU	The minimum CPU time observed for a single transaction execution.

## **DLI call statistics**

This requires that the IMS+ measurement option was active for the measurement and the execution of DLI calls was observed.

<b>Under Heading</b>	<b>This is Displayed</b>
DLI call count	The number of DLI calls counted during the measurement session.
DLI call rate	The DLI call rate per second during the measurement session.
DLI observations	The numbers of samples taken when a DLI call was in-flight.
DLI call thrupt	The DLI call throughput rate per second based on the number of DLI calls counted divided by the DLI service time.
DLI svc time	The total service time for DLI calls during the measurement session.
DLI CPU time	The total CPU time for DLI calls during the measurement session.
DLI max svc	The service time of the longest running DLI call during the measurement session.
DLI max CPU	The highest CPU time for a DLI call during the measurement session.
DLI min svc	The service time of the shortest running DLI call during the measurement session.
DLI min CPU	The lowest CPU time for a DLI call during the measurement session.



---

## I02 - IMS DL/I call timeline

### Usage

Use this report to see the chronology of DL/I calls observed during the measurement interval. Each line shows information about one executed DL/I call. The IMS+ feature must have been enabled when the measurement was performed.

The number of DLI calls displayed in this report is limited by the value of the IMSIMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of DLI calls issued reaches the value specified for IMSIMaxTraceSize.

### Quantification

Each report line shows information pertaining to one IMS DL/I call.

### Detail line hierarchy

The I02 report shows only one detail line level. It cannot be expanded.

### Detail line descriptions

Under Heading	This is Displayed
Call Seq	A sequence number assigned to the DL/I call execution.
Func	The DL/I function code.
PCB Name	The name of the PCB referenced by the DL/I call.
ID	An identifier assigned to each unique DL/I call. This is useful when examining printed reports. You can use this identifier to locate detailed information about the DL/I call in the I15 DL/I Call Attributes report.
Location	The location, in CSECT+offset format, of the return address of the DL/I call.
Stat	The PCB status code returned by IMS upon completion of the DL/I call.
Call Time	The time of day at which the DL/I call occurred.
Duration	The duration of the DL/I call in seconds.

## Sample reports

Below is an IMS DL/I call timeline sample report:

CallSeq	Func	PCB Name	Id	Location	Stat	Call Time	Duration
000001	GU	IOPCB	0001	BBSFIN00+038C		20:36:10.29	0.0001
000002	GHU	DBSCA001	0002	BBSAP012+0E0E		20:36:11.20	0.0556
000003	GHU	DBSCN001	0003	BBSAP012+0EE4		20:36:11.26	0.0133
000004	GHU	DBSCA002	0004	BBSAP012+1086		20:36:11.27	0.0003
000005	ISRT	DBSCA002	0005	BBSAP012+1110		20:36:11.27	0.0003
000006	GHU	DBSTL001	0006	BBSAP012+11B0		20:36:11.27	0.0232
000007	ISRT	DBSTL001	0007	BBSAP012+1252		20:36:11.30	0.0003
000008	REPL	DBSCA001	0008	BBSAP012+131E		20:36:11.30	0.0001
000009	REPL	DBSCN001	0009	BBSAP012+13A4		20:36:11.30	0.0023
000010	ISRT	IOPCB	0010	BBSFIN00+0410	QH	20:36:11.46	0.0002
000011	GU	IOPCB	0001	BBSFIN00+038C		20:36:11.46	0.0087
000012	GHU	DBSCA001	0002	BBSAP012+0E0E		20:36:11.47	0.0396
000013	GHU	DBSCN001	0003	BBSAP012+0EE4		20:36:11.51	0.0257
000014	GHU	DBSCA002	0004	BBSAP012+1086		20:36:11.54	0.0002

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	DL/I call	Display context help information.
++	DL/I call	Show additional details.
M	DL/I call	Display load module information.
P	DL/I call	Display source program mapping.

## I03 - IMS transaction timeline

### Usage

Use this report to see the chronology of IMS transactions observed during the measurement interval. Each line shows information about one executed IMS transaction and can be expanded to show the sequence of DL/I calls executed by the transaction. The IMS+ feature must have been enabled when the measurement was performed.

The number of transactions and DLI calls displayed in this report is limited by the value of the IMSIMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of DLI calls issued reaches the value specified for IMSIMaxTraceSize.

### Quantification

Each report line shows information pertaining to one IMS transaction.

## Detail line hierarchy

The unexpanded I03 report shows a line for each observed IMS transaction. You can expand each line to reveal one additional hierarchical level of detail. The hierarchy is illustrated here:

**Level 1** IMS Transaction  
**Level 2** DL/I Call

## Detail line descriptions

### IMS transaction detail line

This is the first-level detail line. Each line shows information about an observed IMS transaction. These lines appear in transaction chronological sequence.

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB/PCB	The name of the PSB under which the IMS transaction was scheduled.
Location	The LTERM where the transaction originated.
Txn Time	The time of day at which the IMS transaction was initiated. This is the time at which the transaction program received control upon return from the GU-IOPCB call.
Duration	The duration of the IMS transaction in seconds. The duration is measured from the time of return from the GU-IOPCB to the time of entry to the next GU-IOPCB.

### DL/I call detail line

Line This is the second-level detail line. Each line shows information about an observed IMS DL/I Call that was executed in the transaction. These lines appear in DL/I call chronological sequence.

Under Heading	This is Displayed
TranCode	A sequence number assigned to the DL/I call execution.
PSB/PCB	The name of the PCB referred to by the DL/I call.
ID	An identifier assigned to each unique DL/I call. This is useful when examining printed reports. You can use this identifier to locate detailed information about the DL/I call in the I15 DL/I Call Attributes report.
Func	The DLI function code.
Location	The location, in CSECT+offset format, of the return address of the DL/I call.
Stat	The PCB status code returned by IMS upon completion of the DL/I call.
Txn Time	The time of day at which the DL/I call occurred.
Duration	The duration of the DL/I call in seconds.

## Sample reports

A sample report is shown below. The first TranCode has been expanded to the second level.

```

File View Navigate Help
-----
I03: IMS Transaction Timeline (0805/ADSMPP) Row 00001 of 00111
Command ==>> _____ Scroll ==>> CSR

```

TranCode	PSB/PCB	Id	Func	Location	Stat	Txn Time	Duration
BBSDR000	BBSFIN00					20:36:10.29	1.1639
± 000001	IOPCB	0001	GU	BBSFIN00+038C		20:36:10.29	0.0001
→ 000002	DBSCA001	0002	GHU	BBSAP012+0E0E		20:36:11.20	0.0556
→ 000003	DBSCN001	0003	GHU	BBSAP012+0EE4		20:36:11.26	0.0133
→ 000004	DBSCA002	0004	GHU	BBSAP012+1086		20:36:11.27	0.0003
→ 000005	DBSCA002	0005	ISRT	BBSAP012+1110		20:36:11.27	0.0003
→ 000006	DBSTL001	0006	GHU	BBSAP012+11B0		20:36:11.27	0.0232
→ 000007	DBSTL001	0007	ISRT	BBSAP012+1252		20:36:11.30	0.0003
→ 000008	DBSCA001	0008	REPL	BBSAP012+131E		20:36:11.30	0.0001
→ 000009	DBSCN001	0009	REPL	BBSAP012+13A4		20:36:11.30	0.0023
→ 000010	IOPCB	0010	ISRT	BBSFIN00+0410	QH	20:36:11.46	0.0002
BBSDR000	BBSFIN00			TERMX09		20:36:11.47	0.0760
BBSDR000	BBSFIN00					20:36:11.55	0.0273
BBSDR000	BBSFIN00					20:36:11.58	0.0467

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	Trancode, DL/I call	Display context help information.
++	Trancode, DL/I call	Show additional details.
+	Trancode	Expand to reveal next level.
-	Trancode	Collapse to hide next level.
M	Trancode, DL/I call	Display load module information.
P	Trancode, DL/I call	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
+	Trancode	Expand to reveal all entries.
-	Trancode	Collapse to show only first level.

## I04 - IMS transaction activity timeline

### Usage

Use this report to see, for each IMS transaction, how execution of that transaction was distributed over the measurement interval.

### Quantification

A graph, in bar chart format, is displayed for each observed IMS transaction code. The horizontal axis represents the measurement interval which spans 50 columns.

Each column represents an equal 1/50th subinterval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows the approximate percentage of time during the subinterval that execution of the IMS transaction took place. A vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the subinterval execution of the indicated transaction was observed.

## Detail line descriptions

### IMS transaction activity distribution

A group of lines is shown for each reported transaction. Some information about the transaction appears to the left, and a bar chart appears to the right.

Under Heading	This is Displayed
Txn	The IMS transaction code.
PSB	The name of the PSB and program.
Txns	The number of executions of the transaction that occurred during the measurement interval. This value is available only if the IMS+ measurement option was enabled.

## Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I04: IMS Transaction Activity Timeline (0805/ADSMPP)          Row 00001 of 00018
Command ==> _____ Scroll ==> CSR

IMS Transaction          <----- 2,000 Samples: Duration 59.8 Seconds ----->

Txn: BBSDR000          >80%      *      * * * * *
PSB: BBSFIN00          >60%     ** * * * * *
Txns: 50                >40%     ** * * * * *
                        >20%     * * * * *
                        > 0%     * * * * *
                        *.....1....2....3....4....5....6....7....8....9....*

Txn: BBSCR000          >80%      *      * *
PSB: BBSFIN00          >60%     * * * * *
Txns: 49                >40%     ** * * * * *
                        >20%     **** * * * * *
                        > 0%     * * * * *
                        *.....1....2....3....4....5....6....7....8....9....*

```

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
++	Trancode	Show additional details.



## on headings

Cmd	When Applied To Object	Action
?	IMS Transaction Display	Display context help information.
SV	IMS Transaction	Sort next level entries by value.
SN	IMS Transaction	Sort next level entries by name.

---

## Detail lines for reports I05 through I13

This section describes the common format of detail lines shared by reports I05 through I13. These reports quantify activity based on the basis of the PSW (Program Status Word) address values observed at the time of the sample. This format is not exclusive to the IMS reports, it is also used in CPU reports such as C01, and Wait reports such as W01.

### Detail lines reported for PSW sampling

Various report detail lines quantify activity on the basis of the PSW (Program Status Word) address values observed at the time of the sample. One PSW observation is recorded for each TCB. Depending on the report, the 'activity' might be: CPU usage, WAIT time, Queued time, or overall service time.

The analysis reports classify the PSW address values and aggregate them into 'objects'. The reports show each of these objects in one detail line arranged in a hierarchy. Each successive level in the hierarchy represents a more granular breakdown of the quantifications reported in the higher level items.

These objects are reported with a Name field, a Description, a quantification expressed as a percentage, and a histogram depicting the quantity. Descriptions of these detail lines are presented here.

#### APPLCN - Application code category

A group of lines is shown for each reported transaction. Some information about the transaction appears to the left, and a bar chart appears to the right.

Under Heading	This is Displayed
Name	"APPLCN"
Description	"Application Code"
Percent of Time	The percentage of activity measured in application code. The classification as application code is done on the basis of load module names and DPA (Descriptive Program Attribution) tables.

#### SYSTEM - System/OS services category

Under Heading	This is Displayed
Name	"SYSTEM"
Description	"System/OS Services"

Under Heading	This is Displayed
Percent of Time	The percentage of activity measured in system services. The classification as SYSTEM is done on the basis of load module names and DPA (Descriptive Program Attribution) tables. These include core operating system services as well as major system applications or subsystems: DB2, IMS, CICS, MQSeries, etc. SVC (Supervisor Call) routines and MVS Nucleus routines are included in this category.

### NOSYMB - No module name found

Under Heading	This is Displayed
Name	"NOSYMB"
Description	"No Module Name"
Percent of Time	The percentage of activity measured at addresses for which associated module names could not be determined. An example of this would be execution of instructions moved into an area of GETMAINed storage.

### DPA group

Under Heading	This is Displayed
Name	DPA Group name
Description	Description of the DPA group. For example: MVS, IMS, DB2, SVC, LERUNLIB, etc.
Percent of Time	The percentage of activity measured in modules in the indicated grouping.

### DPA subgroup

Under Heading	This is Displayed
Name	DPA Subgroup name.
Description	Description of the DPA subgroup. For example: MVS, IMS, SVCTYPE1, SVCTYPE2, LEBASE, LECOBOL, etc.
Percent of Time	The percentage of activity measured in modules in the indicated grouping.

### NOSYMB address range

Under Heading	This is Displayed
Name	Hexadecimal address range.
Description	"Unresolved Address."
Percent of Time	The percentage of activity measured at the indicated address range. These are addresses for which no corresponding module name could be determined. These measurements are aggregated under the NOSYMB category. Each report line represents a 4K (4096 bytes) range of addresses. The address range is displayed under the Name heading in the format HHHHHHxxx. HHHHHH displays the first five hexadecimal digits of the address and xxx represents the three lower order digits: a range from X'000' to X'FFF' (decimal 0 to 4095).

## SVC - Supervisor call

Under Heading	This is Displayed
Name	SVCnnn - where nnn is the supervisor call number in decimal.
Description	Description of the supervisor call function.
Percent of Time	The percentage of activity measured in the indicated supervisor call.

## CSECT - Control section

Under Heading	This is Displayed
Name	A CSECT (Control Section) name.
Description	Functional description of the CSECT if one is available. Otherwise "csectname in modulename" appears.
Percent of Time	The percentage of activity measured in the indicated CSECT.

## DB2SQL - DB2 SQL processing category

Under Heading	This is Displayed
Name	"DB2SQL"
Description	"SQL Processing."
Percent of Time	The percentage of activity measured while processing SQL requests.

## SQL statement

Under Heading	This is Displayed
Name	A unique reference number assigned to the SQL statement.
Description	The name of the program that issued the SQL request as well as the precompiler statement number of the SQL statement in PGMNAME(stmt#) format. This is followed by the SQL function name. For example: SELECT, INSERT, COMMIT, etc.
Percent of Time	The percentage of activity measured while processing the indicated SQL statement.

## DATAMG - Data management processing category

Under Heading	This is Displayed
Name	"DATAMG"
Description	"Data Mgmt Processing."
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

## DDNAME

Under Heading	This is Displayed
Name	DDNAME of a DASD file.

Under Heading	This is Displayed
Description	Access method for the indicated file: VSAM, QSAM, etc.
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests for the indicated DDNAME. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

### DASD I/O request

Under Heading	This is Displayed
Name	Type of I/O request.
Description	Program name and offset of the I/O request.
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests for the indicated request.

### IMS PSB

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

### IMS transaction

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

### IMS DL/I call

Under Heading	This is Displayed
Name	A unique reference number assigned to the DL/I call.
Description	The DL/I function code followed by the PCB name followed by the relative PCB number in parentheses. The location of the call in csect+offset format follows this.
Percent of Time	The percentage of activity measured while executing the indicated DL/I call.

### IMSDLI - IMS DL/I processing category

Under Heading	This is Displayed
Name	"IMSDLI"
Description	"IMS DL/I Calls."

Under Heading	This is Displayed
Percent of Time	The percentage of activity measured in the processing of IMS DL/I calls.

---

## I05 - IMS DL/I CPU usage by PSB

### Usage

Use this report to see the distribution of CPU usage in an IMS-dependent region. This report aggregates CPU usage by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, an MPP region). Both IMS and non-IMS CPU usage is reported. IMS CPU usage measured during the execution of DL/I calls is reported under detail lines, which identify each of the DL/I calls. Non-DL/I call CPU usage is reported as application code or system routines.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies CPU usage as a percentage of the overall CPU usage observed for the measurement interval. Each quantity is expressed as a percentage representing the ratio of the number of CPU active observations for the object on the report detail line to the total number of CPU active observations in the measurement.

### Detail line hierarchy

An unexpanded I05 report shows a line for each IMS PSB in which CPU usage was observed. The name field reports the PSB name. I05 reports CPU usage for which there was no IMS PSB on a separate line named NONIMS. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 PSB Name or 'NONIMS'
Level 2 IMSDLI - DL/I call execution
  Level 3 DL/I call identification
    Level 4 Category
      Level 5 Load module
        Level 6 CSECT
          Level 4 SVC total
            Level 5 SVCnnn
              Level 6 Load module
                Level 7 CSECT
          Level 2 APPLCN - application code
            Level 3 Load module
              Level 4 CSECT
          Level 2 SYSTEM - system routines
            Level 3 Category
              Level 4 Load module
                Level 5 CSECT
          Level 3 SVC total
            Level 4 SVCnnn
              Level 5 Load module
                Level 6 CSECT
  
```

Level 2 NOSYMB - no load module name  
 Level 3 hexadecimal addresses

## Detail line descriptions

### PSB detail line

This is the first-level detail line. It aggregates activity by IMS PSB.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the second level.

```

  File View Navigate Help
  -----
  I05: IMS CPU Usage by PSB (0805/ADSMPP) Row 00001 of 00008
  Command ==>>> _____ Scroll ==>>> CSR

  Name      Description      Percent of CPU time * 10.00% ±10.1%
                *....1....2....3....4....5....6....7....8.
  BBSFIN00  PSB in MPP region    98.98 =====
  → SYSTEM  System/OS Services   57.57 =====
  → IMSDLI  IMS DL/I Calls       30.30 =====
  → APPLCN  Application Code      10.10 =====
  → NOSYMB  No Module Name        1.01 =

  NONIMS    Not IMS Execution     1.01 =
  → SYSTEM  System/OS Services    1.01 =
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level

Cmd	When Applied To Object	Action
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name
M	Load Module, CSECT	Display load module information
P	Load Module, DL/I call, CSECT, SQL command	Display source program mapping
C01	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset
C02	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset
C03	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset
C09	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries
+	Description	Expand field size
+	Percent CPU	Zoom in scale
-	Name	Collapse to show only first level
-	Description	Reduce field size
-	Percent CPU	Zoom out scale
SV	Name	Sort next level by value
SN	Name	Sort next level by name

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:





representing the ratio of the number of CPU active observations for the object on the report detail line to the total number of CPU active observations in the measurement.

## Detail line hierarchy

An unexpanded I06 report shows a line for each IMS transaction in which CPU usage was observed. The name field reports the transaction code. I06 reports CPU usage for which no IMS transaction was active under a line identifying the PSB name. If no IMS PSB was active the CPU usage is reported under a line named "NONIMS." You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Trancode, PSB Name or 'NONIMS'
Level 2 IMSDLI - DL/I call execution
  Level 3 DL/I call identification
    Level 4 Category
      Level 5 Load module
        Level 6 CSECT
          Level 4 SVC total
            Level 5 SVCnnn
              Level 6 Load module
                Level 7 CSECT
Level 2 APPLCN - application code
  Level 3 Load module
    Level 4 CSECT
Level 2 SYSTEM - system routines
  Level 3 Category
    Level 4 Load module
      Level 5 CSECT
Level 3 SVC total
  Level 4 SVCnnn
    Level 5 Load module
      Level 6 CSECT

Level 2 NOSYMB - no load module name
  Level 3 hexadecimal addresses
  
```

## Detail line descriptions

### Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. A PSB line is reported for any activity under IMS that is not under an IMS transaction.

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the second level.

```

File View Navigate Help
-----
I06: IMS CPU Usage by Txn (0805/ADSMPP) Row 00001 of 00013
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±10.1%
          *....1....2....3....4....5....6....7....8.
BBSDR000 Txn in PSB BBSFIN00 55.55 =====
→ SYSTEM System/OS Services 29.29 =====
→ IMSDLI IMS DL/I Calls 19.19 =====
→ APPLCN Application Code 6.06 ===
→ NOSYMB No Module Name 1.01 =

BBSR000 Txn in PSB BBSFIN00 43.43 =====
→ SYSTEM System/OS Services 28.28 =====
→ IMSDLI IMS DL/I Calls 11.11 =====
→ APPLCN Application Code 4.04 ==

NONIMS Not IMS Execution 1.01 =
→ SYSTEM System/OS Services 1.01 =

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	TranCode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	Trancode, PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.
C01	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.

Cmd	When Applied To Object	Action
C03	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSDR000 Txn in PSB BBSFIN00 55.55 00000000000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call CPU measurements          55
IMS transaction                          BBSDR000
Total CPU measurements                   99
Percent of total                          55.55%

IMS Transaction Information
IMS Trancode   BBSDR000          IMS system   IMSP
PSB name      BBSFIN00          Txn count   50
Total time    10.1332           Total CPU time 0.4327

```

---

## I07 - IMS DL/I CPU usage by DL/I call

### Usage

Use this report to see the distribution of CPU usage across IMS DL/I calls. I07 reports only CPU activity that occurred during processing of DL/I calls.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies CPU usage as a percentage of the total CPU usage observed for all DL/I call processing. CPU usage observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of CPU active observations for the object described by the report detail line to the total number of CPU active observations in DL/I call processing.

### Detail line hierarchy

An unexpanded I07 report shows a line for each IMS DL/I call in which CPU usage was observed. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** DL/I call identification
- Level 2** Category
  - Level 3** Load module
    - Level 4** CSECT
- Level 2** SVC total
  - Level 3** SVCnnn
    - Level 4** Load module
      - Level 5** CSECT

### Detail line descriptions

See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the second level.

File View Navigate Help			
I07: IMS CPU Usage by DL/I Call (0005/ADSMPP)		Row 00001 of 00039	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of DLI CPU time * 10.00%	±18.5%
		*....1....2....3....4....5....6....7....8.	
00001	GU-IOPCB(1) BBSFIN00+0	46.66	=====
→ IMS	IMS Subsystem	33.33	=====
→ MVS	MVS System	10.00	=====
→ NQSYMB	No Module Name	3.33	==
00006	GHU-DBSTL001(13) BBSAP	6.66	===
→ IMS	IMS Subsystem	3.33	==
→ SVC	SVC Routines	3.33	==
00018	REPL-DBSCN001(4) BBSAP	6.66	===
→ IMS	IMS Subsystem	6.66	===
00002	DBSCA001(10) BBSAP	6.66	===
→ SVC	SVC Routines	6.66	===
00009	DBSCN001(4) BBSAP	6.66	===
→ IMS	IMS Subsystem	6.66	===

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	CSECT, DL/I call, SQL command	Display source program mapping.
C01	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.

Cmd	When Applied To Object	Action
C03	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00001  GU-IOPCB(1) BBSFIN00+0 46.66 000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call CPU measurements          14
Total CPU measurements                   30
Percent of total                         46.66%

DL/I Call Information
Function code  GU                PSB Name      BBSFIN00
PCB Name      IOPCB             IMS Id-Region  IMSP-ADSMPP
PCB Number    1                 Call type    CBLTDLI
CSECT/module  BBSFIN00 in BBSFIN00  Offset of call  0000038C
Sample count  10                Call count    60
DLI CPU time  0.14              Service time   0.19

```

---

## I08 - IMS DL/I WAIT time by PSB

### Usage

Use this report to identify any delays caused by wait conditions in IMS regions. This report shows wait time by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, a MPP region). Only wait time observed when an IMS PSB is active is reported. Wait time is identified both within the processing of DL/I calls and outside of DL/I call processing.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) and IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies wait time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was waiting to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transactions.

### Detail line hierarchy

An unexpanded I08 report shows a line for each IMS PSB that was observed. The name field reports the PSB name. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** PSB Name or 'NONIMS'
- Level 2** IMSDLI - DL/I call execution
  - Level 3** DL/I call identification
    - Level 4** Category
      - Level 5** Load module
        - Level 6** CSECT
          - Level 4** SVC total
            - Level 5** SVCnnn
              - Level 6** Load module
                - Level 7** CSECT
- Level 2** APPLCN - application code
  - Level 3** Load module
    - Level 4** CSECT
- Level 2** SYSTEM - system routines
  - Level 3** Category
    - Level 4** Load module
      - Level 5** CSECT
  - Level 3** SVC total
    - Level 4** SVCnnn
      - Level 5** Load module
        - Level 6** CSECT

- Level 2** NOSYMB - no load module name
- Level 3** hexadecimal addresses

## Detail line descriptions

### PSB detail line

This is the first-level detail line. It aggregates activity by IMS transaction.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I08: IMS WAIT Time by PSB (0805/ADSMPP) Row 00001 of 00020
Command ==> Scroll ==> CSR
Name Description Percent of Time * 10.00% ±3.5
*...1...2...3...4...5...6...7...8
BBSFIN00 PSB in MPP region 82.42 =====
→ IMSDL1 IMS DL/I Calls 73.24 =====
→ 00012 GHU-DBSCN001(4) BB 35.15 =====
→ 00003 GHU-DBSCN001(4) BB 33.37 =====
→ 00011 GHU-DBSCA001(10) B 1.91 ==
→ 00002 GHU-DBSCA001(10) B 1.78 ==
→ 00015 GHU-DBSTL001(13) B 0.25
→ 00018 REPL-DBSCN001(4) B 0.25
→ 00001 GU-IOPCB(1) BBSFIN 0.25
→ 00006 GHU-DBSTL001(13) B 0.12
→ 00007 ISRT-DBSTL001(13) 0.12
→ SYSTEM System/OS Services 5.60 ====
→ SVC SVC Routines 5.35 ====
→ LERUNLIB Language Environme 0.25
→ APPLCN Application Code 3.56 ===
→ BKN00SUP Application Progra 1.65 =
→ BKN00102 Application Progra 1.14 =
→ BKN00101 Application Progra 0.38
→ BKN00103 Application Progra 0.25
→ BKN00111 Application Progra 1.12 =

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.



Cmd	When Applied To Object	Action
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:



## Detail line hierarchy

An unexpanded I09 report shows a line for each IMS transaction observed. The name field reports the transaction code. In the event that no IMS transaction was active but a PSB was active, the PSB will be identified in the report line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** Trancode, PSB Name or 'NONIMS'
- Level 2** IMSDLI - DL/I call execution
  - Level 3** DL/I call identification
    - Level 4** Category
      - Level 5** Load module
        - Level 6** CSECT
      - Level 4** SVC total
        - Level 5** SVCnnn
          - Level 6** Load module
            - Level 7** CSECT
  - Level 2** APPLCN - application code
    - Level 3** Load module
      - Level 4** CSECT
  - Level 2** SYSTEM - system routines
    - Level 3** Category
      - Level 4** Load module
        - Level 5** CSECT
    - Level 3** SVC total
      - Level 4** SVCnnn
        - Level 5** Load module
          - Level 6** CSECT

- Level 2** NOSYMB - no load module name
  - Level 3** hexadecimal addresses

## Detail line descriptions

### Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. For any activity under IMS which is not under an IMS transaction a PSB line is reported.

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I09: IMS WAIT Time by TXn (0005/ADSMPP) Row 00001 of 00026
Command ==>> _____ Scroll ==>> CSR

Name      Description      Percent of Time * 10.00% ±3.5
*...1...2...3...4...5...6...7...8
BBSDR000  Txn in PSB BBSFIN00  42.80 =====
→ IMSDLI  IMS DL/I Calls      35.54 =====
→ 00003   GHU-DBSCN001(4) BB  33.37 =====
→ 00002   GHU-DBSCA001(10) B  1.78 ==
→ 00006   GHU-DBSTL001(13) B  0.12
→ 00001   GU-IOPCB(1) BBSFIN  0.25
→ 00007   ISRT-DBSTL001(13)  0.12
→ SYSTEM  System/OS Services  3.69 ===
→ SVC     SVC Routines        3.43 ===
→ LERUNLIB Language Environme  0.25
→ APPLCN  Application Code     3.56 ===
→ BKN00SUP Application Progra   1.65 =
→ BKN00102 Application Progra   1.14 =
→ BKN00101 Application Progra   0.38
→ BKN00103 Application Progra   0.25
→ BKN00111 Application Progra   1.12 =

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command	Expand to reveal next level.
-	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSDR000 Txn in PSB BBSFIN00  42.80 00000000000000000000 |
+-----+

Calculation Details
  IMS DL/I call wait time measurements      336
  IMS transaction                          BBSDR000
  Total measurements                        785
  Percent of total                          42.80%

IMS Transaction Information
  IMS Trancode   BBSDR000           IMS system   IMSP
  PSB name      BBSFIN00           Txn count   50
  Total time    10.1332           Total CPU time 0.4327
  
```

## I10 - IMS DL/I WAIT time by DL/I call

### Usage

Use this report to identify delays caused by wait conditions in specific DL/I calls. This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

#### Note:

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies wait time as a percentage of the total time observed for all DL/I call processing. Time observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of wait samples for the object described by the report detail line to the total number of samples in DL/I call processing.

## Detail line hierarchy

An unexpanded I10 report shows a line for each IMS DL/I call. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 DL/I call identification
Level 2 Category
Level 3 Load module
Level 4 CSECT
Level 2 SVC total
Level 3 SVCnnn
Level 4 Load Module
Level 5 CSECT
  
```

## Detail line descriptions

See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I10: IMS WAIT Time by DL/I Call (0805/ADSMPP) Row 00001 of 00037
Command ==> _____ Scroll ==> CSR

Name      Description                               Percent of Time * 10.00% ±4.0
*...1...2...3...4...5...6...7...8
00012    GHU-DBSCN001(4) BBSAP0  45.17 =====
→ IMS    IMS Subsystem           45.17 =====
  → DFSREP00  IMS Dispatcher Int  45.17 =====

00003    GHU-DBSCN001(4) BBSAP0  42.88 =====
→ IMS    IMS Subsystem           42.88 =====
  → DFSREP00  IMS Dispatcher Int  42.71 =====
  → DBFDEDB0  IMS Module           0.16

00011    GHU-DBSCA001(10) BBSAP  2.45 ==
→ IMS    IMS Subsystem           2.45 ==
  → DBFDEDB0  IMS Module           2.45 ==

00002    GHU-DBSCA001(10) BBSAP  2.29 ==
→ IMS    IMS Subsystem           2.29 ==
  → DBFDEDB0  IMS Module           2.29 ==
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.

Cmd	When Applied To Object	Action
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00012   GHU-DBSCN001(4) BBSAP0 45.17 000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call wait time measurements      276
Total measurements                        611
Percent of total                          45.17%

DL/I Call Information
Function code  GHU                PSB Name      BBSFIN00
PCB Name      DBSCN001            IMS Id-Region  IMSP-ADSMPP
PCB Number    4                  Call type     CBLTDLI
CSECT/module  BBSAP011 in BBSAP011  Offset of call 00000E68
Sample count  277                 Call count    49
DLI CPU time  0.02                Service time   8.21

SSA/FSA      01 SBSCNTL (CNTLNUM =...)
+-----+

```

---

## I11 - IMS DL/I activity by PSB

### Usage

Use this report to see how time is consumed in IMS-dependent regions. All time is reported regardless of whether the time is CPU usage or wait. This report shows activity by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, a MPP region). Only time observed while an IMS PSB was active is reported. Time is identified both within the processing of DL/I calls and outside of DL/I call processing but only when an IMS PSB is active.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was observed compared to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transaction.

### Detail line hierarchy

An unexpanded I11 report shows a line for each IMS PSB in which activity was observed. The name field reports the PSB name. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Trancode, PSB Name or 'NONIMS'

**Level 2** IMSDLI - DL/I call execution

**Level 3** DL/I call identification

**Level 4** Category

**Level 5** Load module

**Level 6** CSECT

**Level 4** SVC total

**Level 5** SVCnnn

**Level 6** Load module

**Level 7** CSECT

**Level 2** APPLCN - application code

**Level 3** Load module

**Level 4** CSECT

**Level 2** SYSTEM - system routines

**Level 3** Category

**Level 4** Load module

**Level 5** CSECT

**Level 3** SVC total

**Level 4** SVCnnn

**Level 5** Load module

**Level 6** CSECT

**Level 2** NOSYMB - no load module name

**Level 3** hexadecimal addresses



## Detail line descriptions

### PSB detail line

This is the first-level detail line. It aggregates activity by IMS transaction.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I11: IMS DL/I Activity by PSB (0805/ADSMPP) Row 00001 of 00034
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of Time * 10.00% ±3.5
*....1....2....3....4....5....6....7....8
BBSFIN00  PSB in MPP region  100.00 =====
→ IMSDLI  IMS DL/I Calls    77.83 =====
  → 00012  GHU-DBSCN001(4) BB  35.28 =====
  → 00003  GHU-DBSCN001(4) BB  33.50 =====
  → 00001  GU-IOPCB(1) BBSFIN  2.29 ==
  → 00002  GHU-DBSCA001(10) B  2.16 ==
  → 00011  GHU-DBSCA001(10) B  1.91 ==
  → 00018  REPL-DBSCN001(4) B  0.50
  → 00006  GHU-DBSTL001(13) B  0.38
  → 00015  GHU-DBSTL001(13) B  0.38
  → 00009  REPL-DBSCN001(4) B  0.38
  → 00007  ISRT-DBSTL001(13)  0.38
  → 00004  GHU-DBSCA002(11) B  0.12
  → 00017  REPL-DBSCA001(10)  0.12
  → 00013  GHU-DBSCA002(11) B  0.12
  → 00008  REPL-DBSCA001(10)  0.12
  → 00010  ISRT-IOPCB(1) BBSF  0.12
→ SYSTEM  System/OS Services  16.94 =====
  → SVC    SVC Routines        15.28 =====
  → LERUNLIB Language Environme  1.14 ==
  → IMS    MVS System          0.50
→ APPLCN  Application Code     5.09 ===
  → BKN00SUP Application Progra  2.03 ==
  → BKNCSI02 Application Progra  1.27 ==
  → BKNCSI01 Application Progra  0.38

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.
C01	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > 00012   GHU-DBSCN001(4) BB 35.28 000000000000000000 |
+-----+

Calculation Details
IMS DL/I call activity measurements      277
Total measurements                       785
Percent of total                         35.28%

DL/I Call Information
Function code   GHU                PSB Name      BBSFIN00
PCB Name       DBSCN001            IMS Id-Region IMSP-ADSMPP
PCB Number     4                   Call type    CBLTDLI
CSECT/module   BBSAP011 in BBSAP011  Offset of call 00000E68
Sample count   277                  Call count    49
DLI CPU time   0.02                 Service time  8.21

SSA/FSA       01 SBSCNTL (CNTLNUM =...)
```

---

## I12 - IMS DL/I activity by transaction

### Usage

Use this report to see how time is consumed in IMS-dependent regions. All time is reported regardless of whether the time is CPU usage or wait. This report shows activity by IMS transaction and is meaningful when measuring a region in which multiple IMS transactions are scheduled (for example, a MPP region). Only time observed while an IMS PSB was active is reported. Time is identified both within the processing of DL/I calls and outside of DL/I call processing but only when an IMS PSB is active.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was observed compared to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transaction.

### Detail line hierarchy

An unexpanded I12 report shows a line for each IMS transaction observed. The name field reports the transaction code. In the event that no IMS transaction was

active but a PSB was active, the PSB will be identified in the report line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** Trancode, PSB Name or 'NONIMS'
- Level 2** IMSDLI - DL/I call execution
  - Level 3** DL/I call identification
    - Level 4** Category
      - Level 5** Load module
        - Level 6** CSECT
          - Level 4** SVC total
            - Level 5** SVCnnn
              - Level 6** Load module
                - Level 7** CSECT
- Level 2** APPLCN - application code
  - Level 3** Load module
    - Level 4** CSECT
- Level 2** SYSTEM - system routines
  - Level 3** Category
    - Level 4** Load module
      - Level 5** CSECT
  - Level 3** SVC total
    - Level 4** SVCnnn
      - Level 5** Load module
        - Level 6** CSECT

- Level 2** NOSYMB - no load module name
  - Level 3** hexadecimal addresses

## Detail line descriptions

### Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. A PSB line is reported for any activity under IMS that is not under an IMS transaction.

Under Heading	This is Displayed
Name	IMS transaction code
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

### Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I12: IMS DL/I Activity by Txn (0805/ADSMPP) Row 00001 of 00046
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of Time * 10.00% ±3.5
*...1...2...3...4...5...6...7...8
-----
BBSDR000  Txn in PSB BBSFIN00  52.48 =====
→ IMSDLI  IMS DL/I Calls      38.47 =====
→ 00003   GHU-DBSCN001(4) BB  33.50 =====
→ 00002   GHU-DBSCA001(10) B  2.16 ==
→ 00001   GU-IOPCB(1) BBSFIN  1.27 ==
→ 00006   GHU-DBSTL001(13) B  0.38
→ 00009   REPL-DBSCN001(4) B  0.38
→ 00007   ISRT-DBSTL001(13)  0.38
→ 00004   GHU-DBSCA002(11) B  0.12
→ 00008   REPL-DBSCA001(10)  0.12
→ 00010   ISRT-IOPCB(1) BBSF  0.12
→ SYSTEM  System/OS Services  9.29 =====
→ SVC     SVC Routines        8.53 =====
→ LERUNLIB Language Environme  0.50
→ MVS     MVS System          0.25
→ APPLCN  Application Code     4.58 ==
→ BKN00SUP Application Progra   2.03 ==
→ BKNCS102 Application Progra   1.14 ==

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Expand to reveal next level.
-	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.
C01	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.



---

## I13 - IMS DL/I activity by DL/I call

### Usage

Use this report to see how time is consumed in IMS-dependent regions by specific DL/I calls. All time is reported regardless of whether the time is CPU usage or wait.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

**Note:**

You should not use this report to analyze CICS measurements.

### Quantification

Each report line quantifies time as a percentage of the total time observed for all DL/I call processing. Time observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of samples for the object described by the report detail line to the total number of samples in DL/I call processing.

### Detail line hierarchy

An unexpanded I13 report shows a line for each IMS DL/I call. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** DL/I call identification
- Level 2** Category
  - Level 3** Load module
    - Level 4** CSECT
- Level 2** SVC total
  - Level 3** SCVnnn
    - Level 4** Load module
      - Level 5** CSECT

### Detail line descriptions

See "Detail lines for reports I05 through I13" on page 291.

## Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I13: DL/I Activity by DL/I Call (0005/ADSMPP) Row 00001 of 00089
Command ==>> _____ Scroll ==>> CSR

Name      Description      Percent of DLI Time * 10.00% ±4.0
*....1....2....3....4....5....6....7....8
00012    GHU-DBSCN001(4) BBSAP0 45.33 =====
→ IMS    IMS Subsystem      45.33 =====
  → DFSREP00  IMS Dispatcher Int 45.17 =====
  → DFSLMGR0  IMS Global Lock Ma 0.16

00003    GHU-DBSCN001(4) BBSAP0 43.04 =====
→ IMS    IMS Subsystem      42.88 =====
  → DFSREP00  IMS Dispatcher Int 42.71 =====
  → DBFDEDB0  IMS Module          0.16
→ SVC     SVC Routines        0.16
  → SVC138    PGSER               0.16

00001    GU-IOPCB(1) BBSFIN00+0 2.94 ==
→ IMS    IMS Subsystem      2.29 ==
  → DFSREP00  IMS Dispatcher Int 0.65
  → DBFSYNCO  IMS Module          0.49
  → DFSQGU00  IMS Module          0.32

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, Load Module, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.
C01	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.



Cmd	When Applied To Object	Action
C03	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00012   GHU-DBSCN001(4) BBSAP0 45.33 000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call activity measurements      277
Total measurements                       611
Percent of total                         45.33%

DL/I Call Information
Function code   GHU                PSB Name      BBSFIN00
PCB Name       DBSCN001            IMS Id-Region  IMSP-ADSMPP
PCB Number     4                  Call type     CBLTDLI
CSECT/module   BBSAP011 in BBSAP011  Offset of call 00000E68
Sample count   277                 Call count    49
DLI CPU time   0.02                Service time   8.21

SSA/FSA        01 SBSCNTL (CNTLNUM =...)

```

---

## I14 - IMS PSB/PCB attributes

### Usage

This report is intended primarily for use when analyzing measurements using printed reports. Use I14 to look up detailed information about PSBs (and their PCBs) referred to by detail lines in other reports. When analyzing data in interactive mode, you can look up this information by pressing the ENTER key (or entering the “++” line command) on any detail line that refers to the PSB.

### Detail line descriptions

#### PSB information

The following information is reported for each PSB:

Under Heading	This is Displayed
PSB Name	The name of the PSB.
IMS System	The system ID of the IMS subsystem. This information might not be available for a CICS measurement.
No. of PCBs	The number of PCBs in the PSB. This information is available only if the IMS+ measurement option was enabled.
LIST=NO PCBs	The number of PCBs in the PSB defined with the LIST=NO option. These PCBs are not visible to the application in the PSB list passed by IMS. They are accessed by symbolic name using the AIB interface. This information is available only if the IMS+ measurement option was enabled.
Txn Count	The number of IMS transactions under this PSB counted during the measurement. This information is available only if the IMS+ measurement option was enabled.
DL/I calls	The number of DL/I calls executed under this PSB during the measurement. This information is available only if the IMS+ measurement option was enabled.
Sample count	The number of times execution under this PSB was sampled.

#### PCB information

The PCBs are listed if the IMS+ measurement option was enabled.

Under Heading	This is Displayed
PSBNum	The relative PCB number.
Name	The symbolic name of the PCB defined in the label field of the PCB macro.
Type	TP or DB indicates a data communications or data base PCB.
DBD/LTRM	The data base name for a data base PCB. The PCB LTERM parameter value for a data communications PCB.
PROCOPT	The processing options for a data base PCB.
LIST	Indicates whether the PCB was defined as LIST=YES or LIST=NO.

## Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I14: IMS PSB/PCB Attributes (0805/ADSMPP) Row 00001 of 00036
Command ==>> _____ Scroll ==>> CSR

IMS PSB Information for PSBName BBSFIN00

PSB Name      BBSFIN00          IMS system      IMSP
No.of PCBs    27                 LIST=NO PCBs   12
Txn count     99                 DL/I calls     1010
Sample count  611

PCBNum  Name   Type  DBD/LTRM  PROCOPT  LIST
-----  ---   ---   ---       ---       ---
1       IOPCB  TP    DBD/LTRM  PROCOPT  LIST
2       ALT1   TP    DBD/LTRM  PROCOPT  LIST
3       ALT2   TP    DBD/LTRM  PROCOPT  LIST
4       DBSCN001 DB    DBSCN000  A        YES
5       DBSCN002 DB    DBSCN000  A        YES
6       DBSCN003 DB    DBSCN000  A        YES
7       DBSCI001 DB    DBSCI000  A        YES
8       DBSCI002 DB    DBSCI000  A        YES
9       DBSCI003 DB    DBSCI000  A        YES
10      DBSCA001 DB    DBSCA000  A        YES
11      DBSCA002 DB    DBSCA000  A        YES
12      DBSCA003 DB    DBSCA000  A        YES
13      DBSTL001 DB    DBSTL000  A        YES
14      DBSTL002 DB    DBSTL000  A        YES
15      DBSTL003 DB    DBSTL000  A        YES
16      DBSCNA01 DB    DBSCN000  A        NO
17      DBSCNA02 DB    DBSCN000  A        NO
18      DBSCNA03 DB    DBSCN000  A        NO

```

## I15 - IMS DL/I call attributes

### Usage

This report is intended primarily for use when analyzing measurements using printed reports. Use I15 to look up detailed information about DL/I calls referred to by detail lines in other reports. When analyzing data in interactive mode, you can look up this information by pressing the ENTER key (or entering the “++” line command) on any detail line that refers to the DL/I call.

### Detail line descriptions

#### DL/I call information

The following information is reported for each DL/I call:

Under Heading	This is Displayed
DL/I Call ID	A unique reference number assigned to the call.
Function Code	The DL/I function code.
PSB Name	The name of the PSB under which all occurrences of this DL/I call executed.
PCB Name	The name of the PCB referenced by the DL/I call.
IMS ID-Region	The ID of the IMS subsystem and the name of the IMS-dependent region.
PCB Number	The relative PCB number in its PSB.

Under Heading	This is Displayed
Call Type	The language interface used by the call: <ASMTDLI, CBLTDLI, etc.> was sampled.
CSECT/Module	The CSECT name and load module of the DL/I call.
Offset of call	The offset in the CSECT of the call.
Sample count	The number of times activity in this DL/I call was sampled.
Call count	The number of occurrences of this DL/I call observed. This information is available only if the IMS+ measurement option was enabled.
DL/I CPU time	The number of seconds of CPU time consumed by all occurrences of the DL/I call. This information is available only if the IMS+ measurement option was enabled.
Service time	The number of seconds of service time for all occurrences of the DL/I call. This information is available only if the IMS+ measurement option was enabled.

## Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I15: IMS DL/I Call Attributes (0805/ADSMPP) Row 00001 of 0192
Command ==> _____ Scroll ==> CSR

DL/I Call Id 00001

Function code  GU          PSB Name      BBSFIN00
PCB Name      IOPCB        IMS Id-Region IMSP-ADSMPP
PCB Number    1              Call type     CBLTDLI
CSECT/module  BBSFIN00 in BBSFIN00 Offset of call 0000038C
Sample count  9              Call count    60
DL/I CPU time 0.14          Service time  0.19

DL/I Call Id 00002

Function code  GHU          PSB Name      BBSFIN00
PCB Name      DBSCA001    IMS Id-Region IMSP-ADSMPP
PCB Number    10         Call type     CBLTDLI
CSECT/module  BBSAP012 in BBSAP012 Offset of call 00000E0E
Sample count  16         Call count    50
DLI CPU time  0.04       Service time  0.66

SSA/FSA      01 SBSABAS (ACCTNUM =...)

```

## I16 - IMS transaction service times

### Usage

Use this report to see information about IMS transaction service times. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

## Quantification

Use this report to see information about IMS transaction service times. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

## Detail line hierarchy

The I16 report shows one detail line level. It cannot be expanded.

## Detail line descriptions

The following information is reported for each DL/I call:

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB/PGM	The name of the PSB and program.
Counts: Txns	The number of executions of the transaction that occurred during the measurement interval.
Counts: Fetch	The number of times the program was fetched by IMS. In general, the program is fetched when the transaction is scheduled. The number of fetches of the program is also affected by the limit count value for the transaction. A high fetch count could mean that a performance improvement might be realized by raising the limit count or pre-loading the program.
Counts: Sched	The number of times the program was scheduled for successive executions of the transaction. This is the count of sets of consecutive transaction executions that occurred before QC status was returned to the GU-IOPCB call.
Total Time	The total execution time of the transaction during the measurement interval.
Avg/Txn	The average execution time for the transaction based on the measurement interval.
CPU Time	The total CPU time consumed by all executions of the transaction during the measurement interval.

## Sample reports

A sample report is shown below.

File View Navigate Help							
I16: IMS Transaction Service Times (0805/ADSMPP)						Row 00001 of 0002	
Command ==>						Scroll ==> CSR	
TranCode	PSB/PGM	----- Counts -----			----- Times (secs) -----		
		Txns	Fetch	Sched	Total Time	Avg/Txn	CPU Time
<u>BBSDR000</u>	BBSFIN00	50	20	20	10.133	0.202	0.432
<u>BBSCR000</u>	BBSFIN00	49	20	20	9.438	0.192	0.407

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## on objects

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
++	Trancode	Show additional details.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSDR000  BBSFIN00  50  20  20  10.133  0.202  0.432 |
+-----+

IMS Transaction Information
  IMS Trancode  BBSDR000          IMS system  IMSP
  PSB name     BBSFIN00          Txn count  50
  Total time   10.1332           Total CPU time 0.4327
```

---

## I17 - IMS transaction DL/I call counts

### Usage

Use this report to see information about the number of DL/I calls issued by each of the measured IMS transactions. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

### Quantification

Each report line shows information pertaining to one IMS transaction.

### Detail line hierarchy

An unexpanded I17 report shows a line for each IMS transaction code for which transaction execution was observed. You can expand each line to reveal one additional hierarchical level of detail. The hierarchy is illustrated here:

```
Level 1 IMS Transaction
Level 2 DL/I Call
```

### Detail line descriptions

#### IMS transaction detail line

This is the first-level detail line. Each line shows information about one IMS transaction code.

Under Heading	This is Displayed
Tran/PCB	The IMS transaction code.
PSB/DBD	The name of the PSB and program.
PCBNum	No data is reported in the transaction detail line.

Under Heading	This is Displayed
Func	No data is reported in the transaction detail line.
DL/I Call Count: Total	The total number of DL/I calls counted for all executions of the transaction during the measurement interval.
DL/I Call Count: Minimum	The minimum number of DL/I calls observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Maximum	The maximum number of DL/I calls observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Average	The average number of DL/I calls per transaction for all executions of the transaction during the measurement interval.

### DL/I call detail line

This is the second-level detail line. Each line shows information about a DL/I call for which execution was observed under the transaction.

Under Heading	This is Displayed
Tran/PCB	The name of the PCB referenced by the indicated DL/I call.
PSB/DBD	The DBD name for the DL/I call for database calls.
PCBNum	The relative PCB number of the PCB referenced by the DL/I call.
Func	The DL/I function code.
DL/I Call Count: Total	The total number of occurrences of the indicated DL/I call counted for all executions of the transaction during the measurement interval.
DL/I Call Count: Minimum	The minimum number of occurrences of the indicated DL/I call observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Maximum	The maximum number of occurrences of the indicated DL/I call observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Average	The average number of occurrences of the indicated DL/I call per transaction during the measurement interval.

## Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I17: IMS Transaction DL/I Call Counts (0805/ADSMPP)          Row 00001 of 0002
Command ==>> _____ Scroll ==>> CSR

TranPCB      PSB/DBD      PCBNum      Func      ----- DL/I Call Counts -----
Total      Minimum      Maximum      Average
BBSR000      BBSFIN00          490          10          10          10.00
BBSR000      BBSFIN00          500          10          10          10.00

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## on objects


Cmd	When Applied To Object	Action
?	Trancode, PCB	Display context help information.
+	Trancode	Show additional details.
-	Trancode	Collapse to hide next level.
++	Trancode, PCB	Show additional details.

## on headings

Cmd	When Applied To Object	Action
?	Tran/PCB	Display context help information.
+	Tran/PCB	Expand to reveal all entries.
-	Tran/PCB	Collapse to show only first level.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

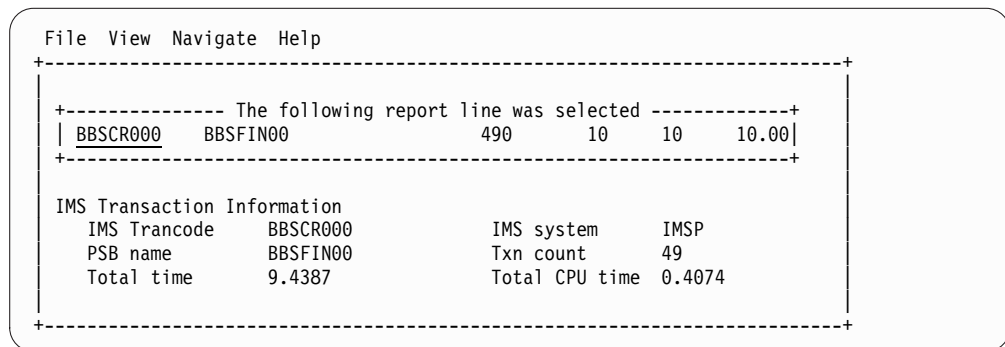

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSR000   BBSFIN00           490      10      10      10.00 |
+-----+

IMS Transaction Information
  IMS Trancode   BBSR000           IMS system   IMSP
  PSB name       BBSFIN00           Txn count    49
  Total time     9.4387           Total CPU time 0.4074
```

---

## I18 - IMS CPU/Svc time by DL/I calls

### Usage

Use this report to see information about exact CPU times and service times for DL/I calls. The IMS+ feature must have been enabled when the measurement was performed.

### Quantification

Each report line shows information pertaining to one DL/I call.

### Detail line hierarchy

The I18 report shows one detail line level. It cannot be expanded.

### Detail line descriptions

Under Heading	This is Displayed
Call	A unique reference number assigned to the DL/I call.



Under Heading	This is Displayed
Func	The DL/I function code.
PCB Name	The name of the PCB referenced by the DL/I call.
Location	The location of the DL/I call in CSECT+offset format.
Count	The number of executions of the DL/I call counted.
Svc time/Prcnt	The total service time for all executions of this DL/I call and the percentage of the total DL/I call service time.
CPU time/Prcnt	The total CPU time consumed by all executions of this DL/I call and the percentage of the total DL/I call CPU time.

## Sample reports

A sample report is shown below.

Call	Func	PCB Name	Location	Count	---- DL/I Processing Time ----			
					Svc Time/Prcnt		CPU Time/Prcnt	
0012	GHU	DBSCN001	BBSAP011+0E68	49	8.210	44.4%	0.028	4.8%
0003	GHU	DBSCN001	BBSAP012+0EE4	50	7.823	42.3%	0.031	5.4%
0002	GHU	DBSCA001	BBSAP012+0E0E	50	0.664	3.5%	0.048	8.3%
0011	GHU	DBSCA001	BBSAP011+0D92	49	0.590	3.1%	0.047	8.2%
0001	GU	IOPCB	BBSFIN00+038C	119	0.557	3.0%	0.148	25.8%
0015	GHU	DBSTL001	BBSAP011+111E	49	0.134	0.7%	0.045	7.8%
0006	GHU	DBSTL001	BBSAP012+11B0	50	0.114	0.6%	0.043	7.5%
0018	REPL	DBSCN001	BBSAP011+12EA	49	0.107	0.5%	0.036	6.2%
0009	REPL	DBSCN001	BBSAP012+13A4	50	0.075	0.4%	0.035	6.1%
0007	ISRT	DBSTL001	BBSAP012+1252	50	0.072	0.3%	0.027	4.7%
0010	ISRT	IOPCB	BBSFIN00+0410	99	0.034	0.1%	0.010	1.7%
0016	ISRT	DBSTL001	BBSAP011+11C0	49	0.016	0.0%	0.015	2.6%
0013	GHU	DBSCA002	BBSAP011+0FF4	49	0.015	0.0%	0.011	1.9%
0004	GHU	DBSCA002	BBSAP012+1086	50	0.014	0.0%	0.010	1.7%
0005	ISRT	DBSCA002	BBSAP012+1110	50	0.011	0.0%	0.011	1.9%
0014	ISRT	DBSCA002	BBSAP011+107E	49	0.011	0.0%	0.011	1.9%

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	DL/I Call	Display context help information.
++	DL/I Call	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	Call	Display context help information.
SV	Call	Sort next level by value.

Cmd	When Applied To Object	Action
SN	Call	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+-----+-----+
| 0012  GHU DBSCN001  BBSAP011+0E68  49  8.210  44.4%  0.028  4.8%|
+-----+-----+-----+-----+-----+-----+-----+-----+

DL/I Call Information
Function code  GHU                PSB Name      BBSFIN00
PCB Name      DBSCN001           IMS Id-Region IMSP-ADSMPP
PCB Number    4                Call type     CBLTDLI
CSECT/module  BBSAP011 in BBSAP011  Offset of call 00000E68
Sample count  277              Call count    49
DLI CPU time  0.02            Service time  8.21

SSA/FSA      01 SBSCNTL (CNTLNUM =...)

```

## I19 - IMS CPU/Svc time by PSB

### Usage

Use this report to see information about exact CPU times and service times for DL/I calls by PSB. The IMS+ feature must have been enabled when the measurement was performed.

### Quantification

Each report line shows information pertaining to one PSB.

### Detail line hierarchy

The I19 report shows one detail line level. It cannot be expanded.

### Detail line descriptions

Under Heading	This is Displayed
PSB Name	The IMS PSB name.
Txn Count	The number of transaction executions counted under the indicated PSB.
DL/I Count	The number of DL/I calls counted under the indicated PSB.
Svc time/Prcnt	The total service time for all executions of DL/I calls under the indicated PSB and the percentage of the total DL/I call service time.
CPU time/Prcnt	The total CPU time consumed by all executions of DL/I calls under the indicated PSB and the percentage of the total DL/I call CPU time.

## Sample reports

A sample report is shown below.

```
File View Navigate Help
-----
I19: IMS CPU/Service Time by PSB (0805/ADSMPP) Row 00001 of 0001
Command ==> _____ Scroll ==> CSR

PSB Name Txn DL/I ----- DL/I Processing Time -----
          Count Count Svc Time/Prcnt CPU Time/Prcnt
BBSFIN00 101 1010 18.466 100.0% 0.573 100.0%
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
++	PSB Name	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
SV	PSB Name	Sort next level by value.
SN	PSB Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+----- The following report line was selected -----+
| BBSFIN00      99      1010      18.466      100.0%      0.573      100.0% |
+-----+

IMS PSB Information
PSB Name      BBSFIN00      IMS system      IMSP
No.of PCBs    27      LIST=NO PCBs    12
Txn count     99      DL/I calls      1010
Sample count  611

PCBNum  Name      Type  DBD/LTRM  PROCOPT  LIST
1      IOPCB     TP
2      ALT1      TP
3      ALT2      TP
4      DBSCN001 DB  DBSCN000  A        YES
5      DBSCN002 DB  DBSCN000  A        YES
6      DBSCN003 DB  DBSCN000  A        YES
7      DBSCI001 DB  DBSCI000  A        YES
8      DBSCI002 DB  DBSCI000  A        YES
9      DBSCI003 DB  DBSCI000  A        YES
10     DBSCA001 DB  DBSCA000  A        YES
11     DBSCA002 DB  DBSCA000  A        YES
12     DBSCA003 DB  DBSCA000  A        YES
13     DBSTL001 DB  DBSTL000  A        YES
14     DBSTL002 DB  DBSTL000  A        YES
15     DBSTL003 DB  DBSTL000  A        YES
16     DBSCNA01 DB  DBSCN000  A        NO
17     DBSCNA02 DB  DBSCN000  A        NO
18     DBSCNA03 DB  DBSCN000  A        NO
19     DBSCIA01 DB  DBSCI000  A        NO
20     DBSCIA02 DB  DBSCI000  A        NO
21     DBSCIA03 DB  DBSCI000  A        NO
22     DBSCAA01 DB  DBSCA000  A        NO
23     DBSCAA02 DB  DBSCA000  A        NO
24     DBSCAA03 DB  DBSCA000  A        NO
25     DBSTLA01 DB  DBSTL000  A        NO

```

## I20 - IMS CPU/Svc time by transaction

### Usage

Use this report to see information about exact CPU times and service times for DL/I calls by IMS transaction. The IMS+ feature must have been enabled when the measurement was performed.

### Quantification

Each report line shows information pertaining to one IMS transaction code.

### Detail line hierarchy

The I20 report shows one detail line level. It cannot be expanded.

### Detail line descriptions

Under Heading	This is Displayed
TranCode	The IMS transaction code.
Txn Count	The number of executions of the transaction that occurred during the measurement interval.

Under Heading	This is Displayed
Txn Total Time: Service	The total service time for all execution in the indicated transaction. This includes DL/I call execution and all other program execution.
Txn Total Time: CPU	The total DL/I CPU time consumed by all execution in the indicated transaction. This includes DL/I call execution and all other program execution.
Svc time/% of Txn	The total service time for all executions of DL/I calls in the indicated transaction. The percentage indicates how much of the service time was in DL/I call processing. This total does not include GU-IOPCB wait times (not attributed to transaction service time) and may differ from other reports.
CPU time/% of Txn	The total CPU time for all executions of DL/I calls in the indicated transaction. The percentage indicates how much of the CPU time was in DL/I call processing.

## Sample reports

A sample report is shown below.

File View Navigate Help							
I20: IMS CPU/Service Time by Transaction (0805/ADSMPP)						Row 00001 of 0002	
Command ==>						Scroll ==> CSR	
TranCode	Txn Count	-- Txn Total Service	---- CPU Time	----- DL/I Processing Time	----- Svc time %of Txn	----- CPU Time %of Txn	
BBSDR000	50	10.133	0.432	8.995	88.7%	0.372	86.1%
BBSR000	49	9.438	0.407	9.316	98.7%	0.356	87.4%

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	TranCode	Display context help information.
++	TranCode	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	TranCode	Display context help information.
SV	TranCode	Sort next level by value.
SN	TranCode	Sort next level by name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSDR000   50   10.133   0.432   8.995  88.7%  0.372  86.1% |
+-----+

IMS Transaction Information
IMS Trancode   BBSDR000           IMS system   IMSP
PSB name       BBSFIN00           Txn count    50
Total time     10.1332              Total CPU time 0.4327

```

## I21 - IMS CPU/Svc time by PCB

### Usage

Use this report to see information about exact CPU times and service times for DL/I calls by individual PCB. The IMS+ feature must have been enabled when the measurement was performed.

### Quantification

Each report line shows information pertaining to one DL/I call.

### Detail line hierarchy

The I21 report shows one detail line level. It cannot be expanded.

### Detail line descriptions

Under Heading	This is Displayed
PSB Name	The PSB name.
PCB Name	The name of the PCB.
PCBNum	The relative PCB number.
Count	The total number of executions of DL/I calls that referenced the indicated PCB.
Svc time/Percent	The total service time for all executions of DL/I calls in the indicated PCB and the percentage of the total DL/I service time.
CPU time/Percent	The total CPU time consumed by all executions of DL/I calls in the indicated PCB and the percentage of the total DL/I CPU time.

## Sample reports

A sample report is shown below.

----- DL/I Call Counts -----							
PSB Name	PCB Name	PCBNum	Count	Svc time/Percent	CPU Time/Percent		
BBSFIN00	DBSCN001	4	198	16.216	87.8%	0.131	22.8%
BBSFIN00	DBSCA001	10	198	1.268	6.8%	0.106	18.4%
BBSFIN00	IOPCB	1	218	0.591	3.2%	0.158	27.5%
BBSFIN00	DBSTL001	13	198	0.337	1.8%	0.132	23.0%
BBSFIN00	DBSCA002	11	198	0.053	0.2%	0.044	7.6%

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	PCB	Display context help information.
++	PCB	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
SV	PSB Name	Sort next level by value.
SN	PSB Name	Sort next level by name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+----- The following report line was selected -----+
| BBSFIN00 DBSCN001 4 198 16.216 87.8% 0.131 22.8% |
+-----+

IMS PSB Information
PSB Name      BBSFIN00          IMS system      IMSP
No.of PCBs    27                    LIST=NO PCBs    12
Txn count     99                    DL/I calls      1010
Sample count  611

PCBNum  Name      Type      DBD/LTRM      PROCOPT      LIST
 1      IOPCB     TP
 2      ALT1     TP
 3      ALT2     TP
 4      DBSCN001 DB      DBSCN000      A            YES
 5      DBSCN002 DB      DBSCN000      A            YES
 6      DBSCN003 DB      DBSCN000      A            YES
 7      DBSCI001 DB      DBSCI000      A            YES
 8      DBSCI002 DB      DBSCI000      A            YES
 9      DBSCI003 DB      DBSCI000      A            YES
10     DBSCA001 DB      DBSCA000      A            YES
11     DBSCA002 DB      DBSCA000      A            YES
12     DBSCA003 DB      DBSCA000      A            YES
13     DBSTL001 DB      DBSTL000      A            YES
14     DBSTL002 DB      DBSTL000      A            YES
15     DBSTL003 DB      DBSTL000      A            YES
16     DBSCNA01 DB      DBSCN000      A            NO
17     DBSCNA02 DB      DBSCN000      A            NO
18     DBSCNA03 DB      DBSCN000      A            NO
19     DBSCIA01 DB      DBSCI000      A            NO
20     DBSCIA02 DB      DBSCI000      A            NO
21     DBSCIA03 DB      DBSCI000      A            NO
22     DBSCAA01 DB      DBSCA000      A            NO
23     DBSCAA02 DB      DBSCA000      A            NO
24     DBSCAA03 DB      DBSCA000      A            NO
25     DBSTLA01 DB      DBSTL000      A            NO

```

## I22 - IMS Region Transaction Summary

### Usage

Use this report to view a summary of the transactions that executed in the measured IMS Dependent Region. Each detail line summarizes a transaction code with the count of that transaction and the averages for Service time (duration), CPU time, and DL/I calls. The IMS+ feature must be enabled before the measurement. If the DB2+ feature is active, the average SQL calls is reported. If the MQ+ feature is active, the average MQ calls is also reported. The total line sums the transaction counts and reports the average values across all transactions for the other columns.

By default, the detail lines are sorted in ascending transaction code (Name) sequence (SN). You can also request that the data be sorted by transaction count. Enter the SV line command on TranCode heading field to sort by transaction count. The lines are sorted in ascending transaction counts. Entering either SN or SV a second time sorts the lines in the reverse order.



## Quantification

Each report line shows the following information for each transaction code.

- The transaction code.
- The PSB name.
- The number of times that transaction code executed.
- The average service time (duration) per transaction.
- The average CPU time per transaction.
- The average DL/I calls per transaction.
- The average SQL calls per transaction.
- The average MQ calls per transaction.

The CPU time applies only to the region that is being measured. Any execution in other address spaces is not reported.

## Detail line hierarchy

The I22 report shows only one detail line level. It cannot be expanded.

## Detail line descriptions

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB Name	The name of the PSB.
Txn count	The number of executions of the transaction that occurred during the measurement interval.
Svc/Trn	The average service time of the transaction.
CPU/Trn	The average CPU time consumed by the transaction.
DLI/Trn	The average number of DLI calls for the transaction.
SQL/Trn	The average number of SQL calls for the transaction.
MQ/Trn	The average number of MQ calls for the transaction.

## Sample reports

A sample report is shown here.

```
-----  
I22: IMS Region Transaction Summary (0798/IMSDMPP1)          Row 00001 of 00013  
Command ==> _____ Scroll ==> CSR  
  
IMS region name IMSDMPP1  
  
TranCode  PSB Name  Txn count  Svc/Trn  CPU/Trn  DLI/Trn  SQL/Trn  MQ/Trn  
-----  
IMSQATR1  IMSQAPG1    7    0.5325  0.1990  11.85    1.00    3.42  
IMSQATR2  IMSQAPG2    6    0.5361  0.1957  12.00    1.00    3.50  
IMSQATR3  IMSQAPG3    6    0.5647  0.2028  12.00    1.00    4.00  
IMSQATR4  IMSQAPG1    6    0.5369  0.1979  12.00    1.00    4.00  
IMSQATR5  IMSQAPG2    6    0.4952  0.1953  12.00    1.00    4.00  
IMSQATR6  IMSQAPG3    6    0.4535  0.1934  12.00    1.00    4.00  
IMSQATR7  IMSQAPG1    6    0.4673  0.1917  12.00    1.00    4.00  
IMSQATR8  IMSQAPG2    6    0.4855  0.1916  12.00    1.00    4.00  
IMSQATR9  IMSQAPG3    6    0.5171  0.1915  12.00    1.00    4.00  
IVTCV     DFSIVP3    11    0.3169  0.0063  8.00    0.00    0.00  
IVTNO     DFSIVP1    15    0.0067  0.0042  7.00    0.00    0.00  
IVTNV     DFSIVP2    16    0.0077  0.0040  7.00    0.00    0.00  
Total    97    0.3276  0.1129  9.93    0.56    2.19
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here. You can always enter a "/" on any input field to open a menu of line commands available for that field.

### on objects

Cmd	When Applied To Object	Action
?	Transaction Code	Display context help information.
++	Transaction Code	Show additional details.

### on headings

Cmd	When Applied To Heading	Action
?	TranCode	Display context help information.
SV	TranCode	Sort next level by value (Txn count).
SN	TranCode	Sort next level by name.

## Detail window

You can enter "++" or press the Enter key on any line to display a window that contains additional information.

A sample detail window for this report is shown here:

```
I22 - DETAIL Window (0798/IMSDMPP1)
Command ==> _____ Scroll ==> CSR

+----- The following report line was selected -----+
|IMSQATR2 IMSQAPG2      6  0.5361  0.1957  12.00   1.00   3.50 |
+-----+

IMS Transaction Information
IMS Trancode   IMSQATR2           IMS system   IMSD
PSB name      IMSQAPG2           Txn count   6
Total time    3.2171           Total CPU time 1.1745
Total DLI call count 72
Total SQL call count 6
Total MQ call count 21
```



---

## Chapter 6. DB2 performance analysis reports

This section describes the DB2 Performance Analysis Reports.

For information about ...	See ...
The DB2 data extractor	"Overview of DB2 data extractor" on page 344
The DB2+ data extractor	"The DB2+ data extractor" on page 344
Displaying SQL Statement Text	"Displaying SQL Statement Text" on page 345
SQL statement sequence numbers	"SQL statement sequence numbers" on page 346
DB2 Multiple Address Space Support	"Overview of DB2 Multiple Address Space Support" on page 346
F01 DB2 session statistics	"F01 - DB2 measurement" on page 347
F02 DB2 SQL activity timeline	"F02 - DB2 SQL activity timeline" on page 352
F03 DB2 SQL activity by DBRM	"F03 - DB2 SQL activity by DBRM" on page 355
F04 SQL execution summary	"F04 - DB2 SQL activity by statement" on page 359
F05 DB2 SQL activity by plan	"F05 - DB2 SQL activity by plan" on page 363
F06 SQL statement attributes	"F06 - DB2 SQL statement attributes" on page 366
F07 DB2 SQL wait time by DBRM	"F07 - DB2 SQL wait time by DBRM" on page 369
F08 DB2 SQL wait time by statement	"F08 - DB2 SQL wait time by statement" on page 372
F09 DB2 SQL wait time by plan	"F09 - DB2 SQL wait time by plan" on page 374
F10 DB2 SQL CPU/Svc time by DBRM	"F10 - DB2 SQL CPU/Svc time by DBRM" on page 377
F11 DB2 SQL CPU/Svc Time by Stmt	"F11 - DB2 SQL CPU/Svc time by stmt" on page 380
F12 DB2 SQL CPU/Svc Time by Plan	"F12 - DB2 SQL CPU/Svc time by plan" on page 383
F13 DB2 SQL threads analysis	"F13 - DB2 SQL threads analysis" on page 387
F14 DB2 CPU by plan/stored proc	"F14 - DB2 CPU by plan/stored proc" on page 388
F15 DB2 SQL CPU/Svc Time by Rq Loc	"F15 - DB2 SQL CPU/Svc Time by Rq Loc" on page 392
F16 - DB2 SQL CPU/Svc Time by Enclave	"F16 - DB2 SQL CPU/Svc Time by Enclave" on page 395
F17 - DB2 SQL CPU/Svc Time by Corrid	"F17 - DB2 SQL CPU/Svc Time by Corrid" on page 398

For information about ...	See ...
F18 - DB2 SQL CPU/Svc Time by Wkstn	"F18 - DB2 SQL CPU/Svc Time by Wkstn" on page 402
F19 - DB2 SQL CPU/Svc Time by EndUsr	"F19 - DB2 SQL CPU/Svc Time by EndUsr" on page 406
F20 - DB2 Class 3 Wait Times	"F20 - DB2 Class 3 Wait Times" on page 409
DB2 EXPLAIN report	"DB2 EXPLAIN report" on page 411
DB2SQL Category in report C01	"DB2SQL category in C01 report" on page 415

---

## Overview of DB2 data extractor

In order to use the DB2 Performance Analysis Reports, the DB2 data extractor must be turned on when the Observation Request is entered. You must select the DB2 data extractor in the Schedule New Measurement panel.

The DB2 extractor collects measurement data directly related to SQL activity. During each sampling interval, Application Performance Analyzer interrogates DB2 to determine if the application or transaction is currently performing a DB2 request. If it is, a DB2 measurement record is created that describes the request. If the request was to process an SQL statement then details of the SQL statement are also recorded. These DB2 records later are analyzed to produce the DB2 reports.

### The DB2+ data extractor

There is a second DB2 data extractor called DB2+. You will see this if your installation has it enabled, and your TSO ID has authority to use it.

Turning on the DB2+ data extractor allows Application Performance Analyzer to collect the data required to report exact SQL request counts, SQL CPU time, SQL Service Time, and to collect DB2 accounting data from SMF. The DB2+ data extractor needs to be selected to produce report F10, F11, F12, F15, F16, F17, F18, F19, and F20. Also some fields in the F01 report require DB2+.

Turning on DB2+ will insure that the SQL text reported on SQL statements is accurate. Without DB2+ turned on, it is possible for the SQL text to be incorrect. This is true for both static and dynamic SQL.

**Note:** Running Application Performance Analyzer measurements with the DB2+ data extractor turned on causes each DB2 call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. Care should be taken when using this feature with other products that also intercept DB2 calls as unpredictable results might occur. Your installer might have chosen to limit access to this feature.

### Measuring DDF activity

If you measure a DB2 DDF address space with the DB2+ extractor turned on, Application Performance Analyzer captures the remote SQL activity detected in the address space. The data is reported in the following reports: F02, F10, F11, F12, F15, F16, F17, F18 and F19. The only other report available for a DDF measurement is S01 Measurement Profile.

For DDF measurements only, Application Performance Analyzer records the enclave CPU time, zIIP time, and zIIP on CP time for each observed SQL call.

There are some limitations when reporting on a DDF address space:

1. The SQL calls observed will not correlate one-for-one with those issued by the application at the requester site. Some calls will not be observed because they are not sent to the DDF address space.
2. Multiple SQL calls can be issued by DB2 when processing a particular SQL call. For example, an OPEN call could result in FETCH and CLOSE calls being issued by the DDF address space. These calls will have the same statement number as the OPEN call.
3. When a CALL statement results in invoking a stored procedure in the same DB2 subsystem, the stored procedure calls can also be observed in the DDF address space.
4. Some dynamic SQL statements can be shown as static. This is because the DDF address space is treating them as though they are static.
5. The SQL function of remote SQL calls display as the actual SQL function, however because they are remote:
  - The SQL text might not be accurate.
  - Issuing an EXPLAIN request against a SQL statement with a type of Remote SQL can result in an error at the server rather than being caught in the TSO session of the user.
6. Some SQL calls have a statement type of Remote SQL instead of the expected SQL type. For example, INSERT and DELETE calls are observed as Remote SQL. As a consequence:
7. A CALL statement might not always have SQL text available.
8. A DESCRIBE statement does not have any SQL text available.

**Note:**

1. If you want to select a DDF address space from a list when setting up the measurement, enter *\*DIST* in the Job Name pattern field, unless your organization has changed the DDF address space naming standard. In that case, contact your DB2 system administrator to obtain the name of the DDF address space in your organization.
2. If you want to limit the scope of a DDF measurement, you may filter the measurement for specific Correlation Id, End User Id and/or Workstation Id in Panel 5 of the NEW dialog.
3. The Number of Samples specified for a DDF measurement is not used because each DDF call is intercepted rather than sampled. The number of samples will always be converted to approximately one per second.

---

## Displaying SQL Statement Text

When SQL statement text is displayed in a DB2 report, a limit of up to 4,000 characters, or up to 15,000 characters is displayed, depending on the circumstances. SQL statements exceeding the limit are truncated.

For non-DDF observations, the SQL text for dynamic SQL can be up to 15,000 characters long. If the DB2V option is selected, then static SQL text can also be up to 15,000 characters long. Otherwise, static SQL text is limited to 4,000 characters.

For DDF observations, the SQL text for dynamic SQL can be up to 15,000 characters long. Static SQL statements are limited to 4,000 characters.

When the execution of a SQL statement is unsuccessful, DB2 sets a negative SQLCODE. In this situation, Application Performance Analyzer displays the negative SQLCODE in the DB2 reports, rather than the SQL statement text. Report F11 SQL CPU/Service Time by Statement provides a SETUP option to limit the display of SQL statements to only those that ended successfully or to only those that ended unsuccessfully.

## SQL statement text formatting

SQL statement text is displayed unformatted in the main body of the DB2 reports. Complex SQL statements may be difficult to interpret, therefore for readability purposes the SQL statement text in the report detail windows is displayed formatted. To view the formatted SQL text in the detail window, use the '++' line command or press the Enter key as a shortcut. If statement formatting fails for any reason, it is displayed unformatted in the detail window with an accompanying warning message.

When a formatted static SQL statement is displayed, all tokens are separated by a single space, with two possible exceptions:

- Between a host variable marker and a host variable name, for example :H
- Between escaped qualified references, for example. "#SALES"."\$TARGETS"

When a formatted dynamic SQL statement is displayed:

- All tokens except escaped identifiers and string literals are displayed in upper case.
- All excess whitespace characters (including line breaks and tabs) are removed.
- All comments are removed.
- All tokens are separated by a single space.

If the unformatted SQL statement text is truncated and leaves a trailing string literal or escaped identifier with no terminating delimiter, the formatted SQL statement text will display with a matching closing delimiter appended, to prevent a parsing error.

SQL statement text with DBCS identifiers (for example, Japanese or Korean) is always displayed unformatted.

---

## SQL statement sequence numbers

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. In most DB2 reports, this sequence number is preceded by either "S" or "D" indicating if the SQL statement is static or dynamic. Application Performance Analyzer will stop sampling when 99,999 unique SQL statements are observed. When this maximum is reached the observation request is cancelled with the reason 'Maximum SQL statements exceeded'.

---

## Overview of DB2 Multiple Address Space Support

DB2 multiple address space (MASS) support allows you to create a request to measure a specific DB2 stored procedure or user-defined function, regardless of which WLM region it executes in.



You can also measure DB2 activity in stored procedures and user-defined functions that are invoked from any job you are measuring, by selecting the Collateral DB2 data extractor (CDB2). In this case, the measured job does not have to be a stored procedure or user-defined function.

To enter a DB2 MASS observation that measures a specific DB2 stored procedure or user-defined function:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter a dash (-) in the Job name/Pattern field.
3. In Panel 5 – Subsystems, enter the DB2 subsystem name, the schema name, and the stored procedure name or the user-defined function name. You must also indicate whether you are measuring a stored procedure or a user-defined function.
4. In Panel 2 – Options, select the DB2 data extractor.
5. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts an observation request for the DB2 stored procedure or user-defined function. It will execute for the duration specified on the NEW request.

To enter an observation that measures a DB2 batch job that invokes a DB2 stored procedure or user-defined function:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter the batch job name in the Job name/Pattern field.
3. In Panel 2 – Options, select the DB2+ and CDB2 data extractors.
4. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts an observation request for the DB2 batch job. Because the collateral DB2 extractor is on, when the DB2 batch job calls the stored procedure or user-defined function, Application Performance Analyzer generates a separate measurement. This measurement is displayed in the R02 Observation List as child observations under the parent.

---

## F01 - DB2 measurement

### Usage

Use this report to see a general overview of the DB2 measurement data. This is a good report to examine first when analyzing DB2 information. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. The first section of this report consists of a series of mini performance graphs illustrating various types of activity that was measured. This is followed by a section that reports measurement values.

### Performance graphs

These are histograms quantifying measurement data. To the right of some of the graphs, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

## Most Active DB2 Plans

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DB2 Plan Name	A DB2 plan name is shown and the number of samples in which processing of SQL requests under this plan was observed. The percentage and the graph represent the proportion of the overall measurement time SQL requests were being serviced under this DB2 plan.

## Most active package/DBRMs

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
Package or DBRM Name	A package or DBRM name is shown and the number of samples in which processing of SQL requests in this Package/DBRM was observed. The percentage and the graph represent the proportion of the overall measurement time SQL requests were being serviced in this Package/DBRM.

## Most active SQL statements

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of samples in which processing of this SQL request was observed. The percentage and the graph represent the proportion of the overall measurement time this SQL request was being serviced.

## Most CPU consumptive SQL

This requires that the DB2+ measurement option was active.

Under Heading	This is Displayed
Total SQL CPU Time	The number of seconds of CPU time consumed by all executions of SQL requests during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.

Under Heading	This is Displayed
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of CPU seconds of execution for this statement.

## Most frequent SQL statements

This requires that the DB2+ measurement option was active. The graphic information is based on the number of SQL requests counted.

Under Heading	This is Displayed
Total SQL Calls Counted	The total number of SQL requests counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of SQL requests counted for this statement.

## Single SQL call service time

This requires that the DB2+ measurement option was active.

Under Heading	This is Displayed
Total SQL Service Time	The number of seconds of service time for all executions of SQL requests during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL statement identification	The DBRM name, precompiler statement number, SQL function and the number of seconds of service time for this statement.

## DB2 measurement statistics

A grid of values is shown for the overall DB2 measurement and then a separate grid for each DB2 subsystem. If only one subsystem was observed then only one grid appears.

Under Heading	This is Displayed
DB2 Subsystem Name	The name of the DB2 subsystem.
DB2 Version	The version of DB2 for the subsystem.
SQL Calls Sampled	The number of unique SQL requests in which samples were taken.
SQL observations	The number of samples in which SQL activity was observed.
SQL Calls Executed	The number of SQL requests executed determined on the basis of lower and upper REQCT values for each of the DB2 threads.
Avg SQL call rate	This is the average number of SQL calls per second for the measurement interval. This is based on the SQL calls counted value if it was measured (DB2+ option active). Otherwise it is based on the SQL calls executed value.
SQL Calls Counted	The number of SQL requests counted by the DB2+ measurement feature. This value is available only if the DB2+ measurement option was selected for the measurement. This is an exact SQL request count for the measurement interval.

<b>Under Heading</b>	<b>This is Displayed</b>
SQL throughput	A theoretical SQL request throughput rate based on the number of SQL requests for the portion of the measurement interval SQL processing was occurring. (Time other non-SQL application activity was taking place is excluded.) This is based on the SQL calls counted value if it was measured (DB2+ option active). Otherwise it is based on the SQL calls executed value.
SQL service time	The total service time for SQL processing. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL CPU time	The total CPU time in the measured region for SQL processing. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL max time	The maximum service time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL max CPU	The maximum CPU time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL min time	The minimum service time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL min CPU	The minimum CPU time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.

## Sample reports

A sample report is shown here, it is a scrollable report, and is shown here split into two screen images.



---

## F02 - DB2 SQL activity timeline

### Usage

Use this report to see information about the chronology of SQL requests that were sampled over the duration of the measurement and to identify any calls with excessive service times. Each line shows information about one SQL call. By default, the detail lines are sorted chronologically by DB2 thread. You can also request that the data be sorted in descending sequence by SQL call duration. Enter the "SD" line command on the "Threads" heading field to sort in this sequence. This will bring to the top of the report any SQL calls that might have had excessive service times.

When the DB2+ feature is active for a measurement, the number of SQL calls displayed in this report is limited by the value of the DB2IMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of SQL calls issued reaches the value specified for DB2IMaxTraceSize.

### Quantification

When the DB2+ feature is not active, each report line shows the time at which the first sample for the identified SQL call took place. The duration of the interval execution of the SQL call was observed is also reported. This is derived from the number of samples and the sampling interval. This gives an indication of the service time for the particular SQL call.

When the DB2+ feature is active each report line shows the time at which the identified SQL call started. The service time or duration of execution of the SQL call is also reported. This is measured directly by the DB2+ feature.

### Detail line hierarchy

An unexpanded F02 report shows a line for each SQL call that was measured by the DB2+ feature or that was sampled one or more times. You can expand each line to reveal one additional hierarchical level of detail (using the "+" line command).

The hierarchy is illustrated here:

**Level 1** SQL Call  
**Level 2** SQL Statement Text

...

### Detail line descriptions

#### SQL Call execution detail line

This is the first-level detail line. Each line shows information about one SQL call.

Under Heading	This is Displayed
Thread	A sequence number identifying the DB2 thread. Application Performance Analyzer assigns a unique sequence number to each DB2 thread that was observed.
REQCT	The REQCT value for the SQL call.
Program	The name of the DBRM in which the SQL call was defined.

Under Heading	This is Displayed
Stmt#	The precompiler statement number of the SQL statement.
SQL Function	The SQL function performed by the reported statement: SELECT, INSERT, UPDATE, etc.
Samps	The number of samples recorded for the interval described by this report line. This can be zero if the identified SQL call was measured by the DB2+ feature but not sampled.
Call Time	When the DB2+ feature is not active this is the time at which the first sample in the sequence of samples reported by this line occurred. When the DB2+ feature is active each report line shows the time at which the identified SQL call started. The time is shown in minutes, seconds and hundredths of seconds.
Interval	When the DB2+ feature is not active, this is the duration of the interval, in seconds, during which samples were recorded for the indicated SQL call. This can provide a good indication of the service time for the SQL call. When the DB2+ feature is active, this is measured directly by the DB2+ feature.
CPU Time	The CPU time, in seconds, for the reported SQL call as measured by the DB2+ feature. If an SQL call was not measured by the DB2+ feature but was sampled, the CPU time will be reported as Not Available (N/A). This might occur at the beginning of a measurement before the DB2+ feature completes initialization, depending on the sampling rate and system activity.

### SQL statement text detail line

This is second-level detail line shown directly under the SQL statement detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (Thread). A sample is shown here:

Thread	REQCT	Program	Stmt#	SQL Function	Samps	Call Time	Interval	CPU Time
52577	08557	PFSAMPA	816	SELECT	1	08:24:45.96	0.00	0.002
52577	08564	PFSAMPA	816	SELECT	1	08:24:46.25	0.00	0.001
52577	08566	PFSAMPB	678	SELECT	1	08:24:46.27	0.00	0.002
52577	08567	PFSAMPC	1316	SELECT	2	08:24:46.27	0.01	0.001
52577	08569	PFSAMPC	1443	OPEN	1	08:24:46.28	0.00	0.002
52577	08570	PFSAMPC	1466	FETCH	2	08:24:46.29	0.01	0.003
52577	08571	PFSAMPC	1466	FETCH	2	08:24:46.30	0.01	0.002
52577	08586	PFSAMPC	3155	SELECT	3	08:24:46.32	0.01	0.006
52577	08587	PFSAMPC	3179	SELECT	1	08:24:46.33	0.00	0.005
52577	08588	PFSAMPB	816	UPDATE	1	08:24:46.34	0.00	0.002
52577	08592	PFSAMPA	816	SELECT	1	08:24:46.50	0.00	0.001
52577	08598	PFSAMPA	816	SELECT	1	08:24:46.68	0.00	0.001
52577	08599	PFSAMPB	408	SET HOST VAR	1	08:24:46.69	0.00	0.002
52577	08601	PFSAMPC	1316	SELECT	5	08:24:46.69	0.03	0.003
52577	08604	PFSAMPC	1466	FETCH	1	08:24:46.73	0.00	0.001
52577	08605	PFSAMPC	1466	FETCH	3	08:24:46.74	0.01	0.001
52577	08607	PFSAMPC	2989	SELECT	1	08:24:46.76	0.00	0.002

You can enter a “+” line command to expand to the next level, which is the SQL text. The report is shown here where a thread has been expanded:

Thread	REQCT	Program	Stmt#	SQL Function	Samps	Call Time	Interval	CPU Time	
52577	08557	PFSAMPA	816	SELECT	1	08:24:45.96	0.00	0.002	
52577	08564	PFSAMPA	816	SELECT	1	08:24:46.25	0.00	0.001	
52577	08566	PFSAMPB	678	SELECT	1	08:24:46.27	0.00	0.002	
52577	08567	PFSAMPC	1316	SELECT	2	08:24:46.27	0.01	0.001	
52577	08569	PFSAMPC	1443	OPEN	1	08:24:46.28	0.00	0.002	
52577	08570	PFSAMPC	1466	FETCH	2	08:24:46.29	0.01	0.003	
52577	08571	PFSAMPC	1466	FETCH	2	08:24:46.30	0.01	0.002	
52577	08586	PFSAMPC	3155	SELECT	3	08:24:46.32	0.01	0.006	
				> SELECT * INTO : H , : H , : H , : H , : H : H FROM					
				> DEPT WHERE XRATE = : H					
52577	08587	PFSAMPC	3179	SELECT	1	08:24:46.33	0.00	0.005	
52577	08588	PFSAMPB	816	UPDATE	1	08:24:46.34	0.00	0.002	
52577	08592	PFSAMPA	816	SELECT	1	08:24:46.50	0.00	0.001	
52577	08598	PFSAMPA	816	SELECT	1	08:24:46.68	0.00	0.001	
52577	08599	PFSAMPB	408	SET HOST VAR	1	08:24:46.69	0.00	0.002	
52577	08601	PFSAMPC	1316	SELECT	5	08:24:46.69	0.03	0.003	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Thread	Display context help information.
++	Thread	Show additional details.
+	Thread	Expand to reveal next level.
-	Thread	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	Thread	Display context help information.
+	Thread	Expand to reveal all entries.
-	Thread	Collapse to hide next level.
ST	Thread	Sort chronologically by DB2 thread.
SD	Thread	Sort descending by SQL call duration.
SC	Thread	Sort descending by SQL CPU Time

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to appear:



```

File View Navigate Help
+-----+
SQL Call Information
Sample count      1                      DB2 Authid      USER1
SQL CPU time     0.002                   Service time    0.00

SQL Statement Information
Subsystem name    DSN1                      Attach type     SASS
Plan name        PFSAMPC                   Plan bind time  no data

DBRM name        PFSAMPA                      DBRM token      17D8B8DF 05CC86F8
DBRM date/time   May-08-06 15:48:14

Package ID       PFSAMPA                      Location        CABNETDB24
Collectn name    PFSAMPX1                   Pkg BIND time  no data

SQL function     SELECT                      Static/dynamic  Static
Precmplr stmt#   678                       DBRM section#   4
CSECT/module     PFSAMPA in PFSAMPA        Offset of call  00002764
Sample count     147                       SQL req count   333
SQL CPU time     0.60                      Service time    0.84

SQL Statement:
      SELECT *
      INTO : H ,
           : H : H ,
           : H : H
      FROM DEP
      WHERE XRATE = : H

DB2 Thread Information
Thread sequence number      00001
Attachment type             CICS

First REQCT value observed   05256
Time of first REQCT         14:06:47.24

Last REQCT value observed    10613
Time of last REQCT          14:07:46.74

Total REQCT increments      5,358
Duration first to last      59.49
SQL rate for thread, per second 90.06
Number of samples for thread 1,417
Number of REQCT values sampled 1,292
+-----+

```

## F03 - DB2 SQL activity by DBRM

### Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each module that issued SQL requests. Expand a module line to see a further breakdown of time consumption by individual SQL request issued by the module.

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

## Quantification

Each report line quantifies service time for all SQL requests issued by a module (DBRM). This is further broken down by SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

## Detail line hierarchy

An unexpanded F03 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the "+" line command).

The hierarchy is illustrated here:

```
Level 1 Module (DBRM)
Level 2 SQL Request
  Level 3 SQL Statement Text
Level 2 SQL Request
  Level 3 SQL Statement Text
```

...

## Detail line descriptions

### SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name. The DBRM name is often the same name as the corresponding module in which SQL requests were issued.
Percent of Time	The percentage of the measurement interval duration SQL Requests for the indicated DBRM Name were being processed.

### SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. This is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

**Note:** It is normal for the counts for the second-level items to add up to a higher value than the first level line. The reason for this is that the program level line shows the percentage of time DB2 processing is active. For a sample, DB2 is counted as being active only once, regardless of the number of SQL statements being processed (concurrently). So its percentage can be lower than the sum of the individual SQL request statement percentages because of overlaps.

## SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (DBRM Name). A sample is shown here:

```

File View Navigate Help
-----
F03: SQL Activity by Module (0659/CICS23A) Row 00001 of 00003
Command ==> Scroll ==> CSR
Name Stmt# SQL Function Percent of Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7.
PFSAMPC 17.22 =====
PFSAMPB 6.31 ===
PFSAMPA 2.00 =

```

You can enter the “+” line command on a DBRM Name to expand to the next level, which is SQL commands. Then you can expand the SQL commands to show the SQL. A sample is shown here with the first DBRM expanded, and then one of the SQL commands expanded:

```

File View Navigate Help
-----
F03: SQL Activity by Module (0659/CICS23A) Row 00001 of 00019
Command ==> Scroll ==> CSR
Name Stmt# SQL Function Percent of Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7.
PFSAMPC 17.22 =====
→ S00012 01466 FETCH 9.13 =====
→ S00008 01316 SELECT 1.82 =
→ S00017 03054 FETCH 1.81 =
→ S00010 01347 SELECT 1.48 =
→ S00011 01443 OPEN 0.80
→ S00018 03155 SELECT 0.66
> SELECT * INTO : H , : H , : H , : H , : H : H FROM DEP
> T WHERE XRATE = : H
→ S00015 02989 SELECT 0.48
→ S00019 03179 SELECT 0.43
→ S00014 01562 CLOSE 0.26
→ S00016 03046 OPEN 0.25
→ S00020 03065 CLOSE 0.05
→ S00009 01316 SELECT 0.01

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Module, Seqno	Display context help information.
++	Module, Seqno	Show additional details.
+	Module, Seqno	Expand to reveal next level.
-	Module, Seqno	Collapse to hide next level.

Cmd	When Applied To Object	Action
SV	Module	Sort next level by value.
M	Module, Seqno	Display load module information.
SS	Module	Sort next level by Seqno.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

### on headings

Cmd	When Applied To Object	Action
?	Name, Percent Time	Display context help information.
+	Name, Percent Time	Expand to reveal all entries.
-	Name, Percent Time	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name

### Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to appear:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > S00012   3179 SELECT                               0.84 |
+-----+

Calculation Details
DB2 SQL activity measurements          84
SQL request                            SELECT
In program                             PFSAMPC
Precompiler statement number          3179
Total measurements                    10,000
Percent of total                       0.84

SQL Statement Information
Subsystem name DSN1                      Attach type SASS
Plan name     PFSAMPA                    Plan bind time May-11-05 13:57:39

DBRM name     PFSAMPC                    DBRM token    179FD30A 1B977868
DBRM date/time May-11-05 13:56:56

Package ID    PFSAMPC                    Location      CABNETDB24
Collectn name PFSAMPX1                   Pkg BIND time May-11-05 13:57:36

SQL function  SELECT                     Static/dynamic Static
Precmplr stmt# 3179                      DBRM section# 21
CSECT/module  PFSAMPC in PFSAMPC        Offset of call 00008610
Sample count  84                        SQL req count 172
SQL CPU time  0.28                       Service time  0.45

SQL Statement: SELECT *
                INTO : H ,
                  : H : H ,
                  : H : H
                FROM VDEP
                WHERE DEPTNO = : H

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

---

## F04 - DB2 SQL activity by statement

### Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each SQL request.

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

### Quantification

Each report line quantifies service time for all executions of an SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

## Detail line hierarchy

An unexpanded F04 report shows a line for each SQL request. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

**Level 1** SQL Request  
**Level 2** SQL Statement Text

...

## Detail line descriptions

### SQL request detail line

This is the first-level detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Program	The DBRM name for the program that issued the SQL request.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. This is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

### SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
F04: SQL Activity by Statement (0659/CICS23A) Row 00001 of 00020
Command ==> _____ Scroll ==> CSR

Seqno Program Stmt# SQL Function Percent of Total Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7...
S00012 PFSAMPC 01466 FETCH 9.13 =====
S00013 PFSAMPB 00816 UPDATE 3.28 ==
S00001 PFSAMPA 00816 SELECT 2.00 =
S00008 PFSAMPC 01316 SELECT 1.82 =
S00017 PFSAMPC 03054 FETCH 1.81 =
S00004 PFSAMPB 00678 SELECT 1.67 =
S00010 PFSAMPC 01347 SELECT 1.48 =
S00002 PFSAMPB 00408 SET HOST VA 1.26 =
S00011 PFSAMPC 01433 OPEN 0.80
S00018 PFSAMPC 03155 SELECT 0.66
S00015 PFSAMPC 02989 SELECT 0.48
S00019 PFSAMPC 03179 SELECT 0.43
S00014 PFSAMPC 01562 CLOSE 0.26
S00016 PFSAMPC 03046 OPEN 0.25
S00020 PFSAMPC 03065 CLOSE 0.05
S00007 PFSAMPB 01385 SELECT 0.03
S00005 PFSAMPB 00947 SELECT 0.02
S00003 PFSAMPB 00408 SET HOST VA 0.01
S00006 PFSAMPB 01163 SELECT 0.01
S00009 PFSAMPC 01316 SELECT 0.01

```

Each line can be expanded to display the SQL statement by entering the “+” line command on the Sequence Number. For example, “+” was entered on the third line in this report to display the SQL.

```

File View Navigate Help
-----
F04: SQL Activity by Statement (0659/CICS23A) Row 00001 of 00022
Command ==> _____ Scroll ==> CSR

Seqno Program Stmt# SQL Function Percent of Total Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7...
S00012 PFSAMPC 01466 FETCH 9.13 =====
S00013 PFSAMPB 00816 UPDATE 3.28 ==
S00001 PFSAMPA 00816 SELECT 2.00 =
      > SELECT * INTO : H FROM DEPTA WHERE XRATE = : H
S00008 PFSAMPC 01316 SELECT 1.82 =
S00017 PFSAMPC 03054 FETCH 1.81 =
S00004 PFSAMPB 00678 SELECT 1.67 =
S00010 PFSAMPC 01347 SELECT 1.48 =
S00002 PFSAMPB 00408 SET HOST VA 1.26 =
S00011 PFSAMPC 01433 OPEN 0.80
S00018 PFSAMPC 03155 SELECT 0.66
S00015 PFSAMPC 02989 SELECT 0.48
S00019 PFSAMPC 03179 SELECT 0.43
S00014 PFSAMPC 01562 CLOSE 0.26
S00016 PFSAMPC 03046 OPEN 0.25
S00020 PFSAMPC 03065 CLOSE 0.05
S00007 PFSAMPB 01385 SELECT 0.03

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

## on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.
-	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

## on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
-	Seqno	Collapse to show only first level.
-	Percent of Time	Zoom out scale
SV	Seqno	Sort next level by value.
SS	Seqno	Sort next level by Seqno.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on an SQL line will cause this detail window to pop up:



```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > S00012   3179 SELECT                               0.84 |
+-----+

Calculation Details
DB2 SQL activity measurements          84
SQL request                            SELECT
In program                             PFSAMPC
Precompiler statement number          3179
Total measurements                    10,000
Percent of total                       0.84

SQL Statement Information
Subsystem name DSN1                      Attach type SASS
Plan name     PFSAMPA                    Plan bind time May-11-05 13:57:39

DBRM name     PFSAMPC                    DBRM token    179FD30A 1B977868
DBRM date/time May-11-05 13:56:56

Package ID    PFSAMPC                    Location      CABNETDB24
Collectn name PFSAMPX1                   Pkg BIND time May-11-05 13:57:36

SQL function  SELECT                     Static/dynamic Static
Precmplr stmt# 3179                     DBRM section# 21
CSECT/module  PFSAMPC in PFSAMPC        Offset of call 00008610
Sample count  84                         SQL req count 172
SQL CPU time  0.28                       Service time  0.45

SQL Statement: SELECT *
                INTO : H ,
                  : H : H ,
                  : H : H
                FROM VDEP
                WHERE DEPTNO = : H

```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

---

## F05 - DB2 SQL activity by plan

### Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each DB2 plan under which measured SQL activity was recorded. Expand a plan line to see a further breakdown of time consumption by individual SQL request.

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

## Quantification

Each report line quantifies service time for all SQL requests issued under a DB2 Plan. This is further broken down by SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

## Detail line hierarchy

An unexpanded F05 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the "+" line command ).

The hierarchy is illustrated here:

```
Level 1 DB2 Plan
Level 2 SQL Request
  Level 3 SQL Statement Text
Level 2 SQL Request
  Level 3 SQL Statement Text
```

...

## Detail line descriptions

### DB2 plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned to the DB2 plan.
Plan/Pgm	The DB2 plan name.
Percent of Time	The percentage of the measurement interval duration the indicated DB2 plan was being processed.

### SQL request detail line

This is the second-level detail line shown directly under the DB2 Plan detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name for the program that issued the SQL request.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	SQL Function The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

### SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

A sample report is shown here with a plan expanded to the second level (statement) and a statement expanded to show the SQL text.

```

File View Navigate Help
-----
F05: SQL Activity by Plan (1336/CICS23A) Row 00001 of 00017
Command ==>> _____ Scroll ==>> CSR

Seqno Plan/Pgm Stmt# SQL Function Percent of Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7.
P0001 PFSAMPA 20.60 =====
-> S00003 PFSAMPC 1466 FETCH 5.79 ==
-> S00001 PFSAMPA 816 SELECT 3.10 ==
    > SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H

-> S00005 PFSAMPC 3054 FETCH 2.29 =
-> S00012 PFSAMPB 678 SELECT 1.94 =
-> S00011 PFSAMPC 1316 SELECT 1.47 =
-> S00010 PFSAMPB 816 UPDATE 1.40 =
-> S00007 PFSAMPC 3179 SELECT 1.09 =
-> S00002 PFSAMPC 1347 SELECT 0.89
-> S00009 PFSAMPC 3155 SELECT 0.79
-> S00008 PFSAMPC 2989 SELECT 0.68
-> S00013 PFSAMPC 1433 OPEN 0.60
-> S00004 PFSAMPC 3046 OPEN 0.30
-> S00014 PFSAMPC 1562 CLOSE 0.14
-> S00006 PFSAMPC 3065 CLOSE 0.12
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, SQL Seqno	Display context help information.
++	Plan Seqno, SQL Seqno	Show additional details.
+	Plan Seqno, SQL Seqno	Expand to reveal next level.
-	Plan Seqno, SQL Seqno	Collapse to hide next level.
M	SQL Seqno	Display load module information.
P	SQL Seqno	Display source program mapping.
EX	SQL Seqno	Display DB2 EXPLAIN data

### on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
-	Seqno	Collapse to show only first level.
-	Percent of Time	Zoom out scale.
SV	Seqno	Sort next level by value.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to pop up:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > S00012   3179 SELECT                               0.84 |
+-----+

Calculation Details
DB2 SQL activity measurements           84
SQL request                             SELECT
In program                              PFSAMPC
Precompiler statement number            3179
Total measurements                      10,000
Percent of total                        0.84

SQL Statement Information
Subsystem name DSN1                      Attach type SASS
Plan name     PFSAMPA                    Plan bind time May-11-05 13:57:39

DBRM name     PFSAMPC                    DBRM token    179FD30A 1B977868
DBRM date/time May-11-05 13:56:56

Package ID    PFSAMPC                    Location      CABNETDB24
Collectn name PFSAMPX1                   Pkg BIND time May-11-05 13:57:36

SQL function  SELECT                     Static/dynamic Static
Precmplr stmt# 3179                      DBRM section#  21
CSECT/module  PFSAMPC in PFSAMPC         Offset of call 00008610
Sample count  84                          SQL req count  172
SQL CPU time  0.28                         Service time   0.45

SQL Statement: SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM VDEP
                WHERE DEPTNO = : H
```

## SETUP options

The following SETUP option can be selected with the SETUP primary command:

### Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

---

## F06 - DB2 SQL statement attributes

### Usage

Use this report to see detailed information about each of the measured SQL statements. This is useful as a reference report when working with printed copies of other DB2 reports that do not show full SQL statement details. (When browsing online, the pop-up detail windows show this information.) The following information is shown for each SQL statement for which activity was observed.

<b>Under Heading</b>	<b>This is Displayed</b>
SQL Statement ID	A unique sequence number assigned by Application Performance Analyzer to the SQL statement. This is shown in other DB2 reports that display SQL statement information.
Subsystem name	The name of the DB2 subsystem under which the SQL statement was executed.
Attachment type	The type of DB2 attachment for the thread under which the SQL statement was executed.
Plan name	The name of the DB2 plan under which the SQL statement was executed.
Plan Bind Time	The date and time of the BIND of the plan.
DBRM Name	The name of the DBRM under which the SQL statement was executed.
DBRM Token	The DBRM consistency token. This is an 8 byte hexadecimal value that identifies the DBRM.
DBRM Date/Time	The date and time of the DBRM. This is the time at which the precompiler created the DBRM.
Package ID	The package ID. This is omitted if there was no package bound for the DBRM.
Location	The location name associated with the package. This is omitted if there was no package bound for the DBRM.
Collection Name	The collection name for the package. This is omitted if there was no package bound for the DBRM.
Package Bind Time	The date and time of the BIND of the package. This is omitted if there was no package bound for the DBRM.
SQL Function	The SQL function: SELECT, UPDATE, FETCH, etc.
Precmplr Stmt#	The statement number assigned by the precompiler to the SQL statement.
Static/Dynamic	This indicates if the SQL request was Static or Dynamic.
DBRM Section#	The section number assigned by the precompiler to the SQL statement. Groups of related statements (such as OPEN, FETCH, CLOSE) are correlated using the section number.
PREPARE Stmt#	The statement number of the corresponding PREPARE statement. This field only applies to dynamic SQL statement that operate on SQL text processed by a corresponding PREPARE statement. In order for this information to appear, it is required that execution of the corresponding PREPARE was sampled.
CSECT/Module	The name of the load module and CSECT in which the SQL call was issued.
Offset of Call	The offset of the SQL call return address in the CSECT or module.
SQL Req Count	The number of SQL calls counted for the indicated statement. This information is available only if the DB2+ measurement option was active. It indicates the number of calls counted at the indicated SQL statement number for the duration of the measurement. Counting begins when the first SQL call is sampled.
Sample Count	The number of Samples in which execution of the indicate statement was measured.

Under Heading	This is Displayed
Total CPU Time	The total CPU time consumed by processing of the indicated statement in the measured region. This information is available only if the DB2+ measurement option was active. It indicates the accumulated CPU time used by the indicated SQL statement number for the duration of the measurement. Accumulation begins when the first SQL call is sampled.
Total Service Time	The total service time for processing of the indicated statement. This information is available only if the DB2+ measurement option was active. It indicates the accumulated service time used by the indicated SQL statement number for the duration of the measurement. Accumulation begins when the first SQL call is sampled.
SQL Statement	The SQL statement text.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
F06: DB2 SQL Statement Attributes (1623/CICS23A)          Row 00001 of 00324
Command ==> _____ Scroll ==> CSR

SQL Statement Id 00001

Subsystem name DSN1          Attach type  SASS
Plan name     PFSAMPA       Plan BIND time Nov-28-04 14:11:17

DBRM name     PSSAMPA       DBRM token   17859595 050DCBBC
DBRM date/time Nov-25-04 14:50:15

Package ID    PFSAMPA         Location     CABNETDB24
Collectn name PFSAMPX1       Pkg BIND time no data

SQL function  SELECT              Static/dynamic Static
Precmplr stmt# 816                DBRM section# 1
CSECT/module  PFSAMPA in PFSAMPA Offset of call 000007FA
Sample count   324                SQL req count 342
SQL CPU time   0.91              Service time  1.72

SQL Statement:  SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = :
                H

SQL Statement Id 00002

Subsystem name DSN1          Attach type  SASS
Plan name     PFSAMPA       Plan BIND time Nov-28-04 14:11:17

DBRM name     PFSAMPC         DBRM token   17859595 06957A24
DBRM date/time Nov-25-04 14:49:42

Package ID    PFSAMPC         Location     CABNETDB24
Collectn name PFSAMPX1       Pkg BIND time no data

SQL function  SELECT              Static/dynamic Static
Precmplr stmt# 1316                DBRM section# 6

```

---

## F07 - DB2 SQL wait time by DBRM

### Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each module (DBRM) that issued SQL requests and is expressed as the percentage of the total measurement interval.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

- For how much of the overall measurement interval was the address space in a WAIT during SQL processing?
- For how much of the SQL processing time was the address space in a WAIT?

You can further expand each module line to see a further breakdown and quantification by individual SQL statements.

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

### Quantification

Each report line quantifies wait time for all SQL requests issued by a module (DBRM). This is further broken down by SQL request.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time for the DBRM.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

### Detail line hierarchy

An unexpanded F07 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the "+" line command).

The hierarchy is illustrated here:

```
Level 1 Module (DBRM)
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
```

...

### Detail line descriptions

#### SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name.
Percent	Either Percent of Total Time or Percent of DBRM SQL Time depending on SETUP option. This is the percentage of time that SQL processing for the indicated DBRM was observed to be in WAIT state.

### SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number of the SQL statement.
SQL Function	The SQL function.
Percent	The percentage of the total time or of the DBRM time (depending on SETUP option) for which SQL processing for the indicated statement was in WAIT state.

### SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This shows the report with one DBRM expanded to the second level (SQL statement):

```

File View Navigate Help
-----
F07: SQL WAIT Time by DBRM (0611/CICS23A) Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

Name      Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
          *....1....2....3....4....5....6....7.
PFSAMPD           25.49 =====
→ S00001    435  FETCH        12.05 =====
→ S00003    541  UPDATE       7.50  ===
→ S00004    465  FETCH        3.95  ==
→ S00002    455  FETCH        1.91  =
→ S00005    485  FETCH        0.06
→ S00008    462  OPEN         0.00
→ S00006    481  CLOSE        0.00
→ S00007    451  CLOSE        0.00

```

You can use the + command to expand an SQL statement and show the SQL text as shown here:



```

File View Navigate Help
-----
F07: SQL WAIT Time by DBRM (0611/CICS23A) Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

Name      Stmt#  SQL Function  Percent of Total Time * 10.00% ±2.5%
          *....1....2....3....4....5....6....7.
PFSAMPD           25.49 =====
→ S00001    435  FETCH           12.05 =====
→ S00003    541  UPDATE           7.50  ==
→ S00004    465  FETCH           3.95  ==
→ S00002    455  FETCH           1.91  =
  > DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS
→ S00005    485  FETCH           0.06
→ S00008    462  OPEN            0.00
→ S00006    481  CLOSE           0.00
→ S00007    451  CLOSE           0.00

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects


Cmd	When Applied To Object	Action
?	DBRM, Seqno	Display context help information.
++	DBRM, Seqno	Show additional details.
+	DBRM, Seqno	Expand to reveal next level.
-	DBRM, Seqno	Collapse to hide next level.
M	DBRM, Seqno	Display load module information.
P	Seqno	Display source program mapping.
SV	DBRM	Sort next level by value.
SS	DBRM	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data

### on headings

Cmd	When Applied To Object	Action
?	Name, Percent of Total Time	Display context help information.
+	Name	Expand to reveal all entries.
+	Percent of Total Time	Zoom in scale.
-	Name	Collapse to show only first level.
-	Percent of Total Time	Zoom out scale.
SV	Seqno	Sort next level by value.
SN	Name	Sort next level entries by name

## SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

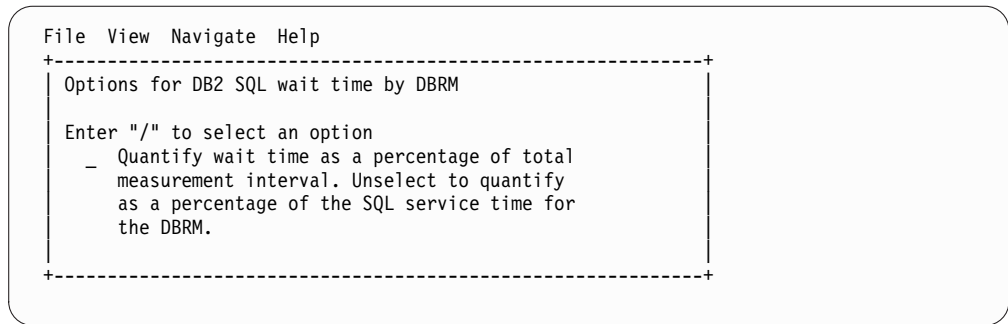

## F08 - DB2 SQL wait time by statement

### Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each SQL statement sampled during the measurement.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

- For how much of the overall measurement interval was the address space in a WAIT during SQL processing?
- For how much of the SQL processing time was the address space in a WAIT?

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

### Quantification

Each report line quantifies wait time for an SQL request observed during the measurement.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time for the SQL statement.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

### Detail line hierarchy

An unexpanded F08 report shows a line for each observed SQL statement. You can expand each line to reveal one additional hierarchical level of detail (using the "+" line command).

The hierarchy is illustrated here:

```
Level 1 SQL Request
  Level 2 SQL Statement Text
Level 1 SQL Request
  Level 2 SQL Statement Text
...
```

## Detail line descriptions

### SQL request detail line

This is the first-level detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Program	The DBRM name for the program that issued the SQL request.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. This is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Total Time	The percentage of the total time or of the SQL statement service time (depending on SETUP option) for which processing for the indicated statement was in WAIT state.

### SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This shows the report with one of the SQL statements expanded to show the next level, which is SQL text.

```

File View Navigate Help
-----
F08: SQL WAIT Time by Statement (0611/CICS23A)          Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

Seqno  Program  Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
      *...1...2...3...4...5...6...7...
S00001  PFTESTD   435    FETCH         12.05 =====
S00003  PFTESTD   541    UPDATE         7.50  ===
S00004  PFTESTD   465    FETCH         3.95  ==
S00002  PFTESTD   455    FETCH         1.91  =
      > DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS

S00005  PFTESTD   485    FETCH         0.06
S00007  PFTESTD   451    CLOSE         0.00
S00008  PFTESTD   462    OPEN          0.00
S00006  PFTESTD   481    CLOSE         0.00

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.

Cmd	When Applied To Object	Action
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.
-	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

### on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Total Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Total Time	Zoom in scale.
-	Seqno	Collapse to show only first level.
-	Percent of Total Time	Zoom out scale.
SV	Seqno	Sort next level by value.
SS	Seqno	Sort next level by program and statement number.

## SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

```

File View Navigate Help
+-----+
| Options for DB2 SQL wait time by statement |
|                                           |
| Enter "/" to select an option           |
|   - Quantify wait time as a percentage of total |
|     measurement interval. Unselect to quantify |
|     as a percentage of the SQL service time for |
|     the SQL statement.                   |
+-----+

```

---

## F09 - DB2 SQL wait time by plan

### Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each observed DB2 Plan under which SQL requests were issued. It is expressed as the percentage of the total measurement interval.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

1. For how much of the overall measurement interval was the address space in a WAIT during SQL processing?

2. For how much of the SQL processing time was the address space in a WAIT?

You can further expand each DB2 Plan line to see a further breakdown and quantification by individual SQL statements. The SQL statements can be expanded to show the SQL text.

**Note:** This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

## Quantification

Each report line quantifies wait time for all SQL requests issued under a DB2 Plan. This is further broken down by SQL request.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time under the Plan.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

## Detail line hierarchy

An unexpanded F09 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 DB2 Plan
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
...
```

## Detail line descriptions

### DB2 plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan under whose execution SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the DB2 plan.
Plan/Pgm	The name of a DB2 plan.
Percent of Total Time	The percentage of the total time or of the SQL processing time for the PLAN (depending on SETUP option) for which SQL processing under the plan was in WAIT state.

### SQL request detail line

This is the second-level detail line shown directly under the Plan detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The name of a DB2 plan.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Total Time	The percentage of the total time or of the SQL processing time for the PLAN (depending on SETUP option) for which processing for the indicated statement was in WAIT state.

### SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

In this sample, the P0001 plan line has been expanded to the second level (SQL statement), and one of the statements has been expanded to the third level to show the SQL text.

```

File View Navigate Help
-----
F09: SQL WAIT Time by Plan (0611/CICS23A) Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

Seqno   Plan/Pgm  Stmnt#  SQL Function  Percent of Total Time * 10.00% ±2.5%
          *....1....2....3....4....5....6....7...
P0001   PFPLN022          25.49 =====
  → S00001 PFTESTD   435  FETCH       12.05 =====
  → S00003 PFTESTD   541  UPDATE       7.50 =====
  → S00004 PFTESTD   465  FETCH        3.95 ==
  → S00002 PFTESTD   455  FETCH        1.91 =
      > DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS
  → S00005 PFTESTD   485  FETCH        0.06

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Seqno	Display context help information.
++	Plan Seqno, Seqno	Show additional details.
+	Plan Seqno, Seqno	Expand to reveal next level.
-	Plan Seqno, Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.

Cmd	When Applied To Object	Action
EX	Seqno	Display DB2 EXPLAIN data

### on headings

Cmd	When Applied To Object	Action
?	Seqno,Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
-	Seqno	Collapse to show only first level.
-	Percent of Time	Zoom out scale.
SV	Seqno	Sort next level by value.

## SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

```

File View Navigate Help
+-----+
| Options for DB2 SQL wait time by plan |
|                                     |
| Enter "/" to select an option       |
|   - Quantify wait time as a percentage of total |
|     measurement interval. Unselect to quantify |
|     as a percentage of the SQL service time for |
|     the plan.                         |
+-----+

```

## F10 - DB2 SQL CPU/Svc time by DBRM

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP CPU times are also recorded. This report shows quantification by DBRM. You can further expand each DBRM line to see a further breakdown and quantification by individual embedded SQL statement.

### Quantification

Each report line shows the following for each DBRM and, when expanded, for each SQL statement observed in the DBRM.

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean SQL call service time, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

## Detail line descriptions

### SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name.
Nbr of Calls	The number of SQL calls counted for this DBRM.
CPU Time: Total	The total CPU time for all SQL calls counted for this DBRM. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this DBRM used.
Svc Time: Total	The total service time for all SQL calls for this DBRM. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc time: Pct	The percent of total service time this DBRM used.

### SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time this statement used.



Under Heading	This is Displayed
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

### Sample reports

This sample shows the report expanded to the second level (SQL statement), and one of the statements has been expanded to the third level to show the SQL text.

```

File View Navigate Help
-----
F10: SQL CPU/Service Time by DBRM (1286/CICS23A)          Row 00001 of 00014
Command ==>>> _____ Scroll ==>>> CSR

Name          Stmt#  SQL Function      Nbr of  --CPU Time--  --Svc Time--
                SQL Calls  Total    Mean         Total    Mean
PFSAMPC                1,204    3.08  0.00256    5.57  0.00462
± S00003          1466  FETCH              516    2.27  0.00441    3.86  0.00749
→ S00006          1316  SELECT              172    0.39  0.00227    1.01  0.00588
→ S00005          1347  SELECT              172    0.25  0.00150    0.40  0.00232
    > SELECT CUSACCT INTO : H FROM ACTINFO WHERE SPCRATE =
    > : H AND INDX01 = '01'

→ S00008          1443  OPEN                172    0.11  0.00064    0.21  0.00122
→ S00007          1562  CLOSE              172    0.04  0.00026    0.07  0.00045
PFSAMPB                514    1.04  0.00203    1.70  0.00331
→ S00002           672  SELECT              342    0.69  0.00204    1.13  0.00332
→ S00004           810  UPDATE              172    0.34  0.00201    0.56  0.00331
PFSAMPA                342    0.84  0.00246    1.74  0.00511
→ S00002           815  SELECT              342    0.84  0.00246    1.74  0.00511

```

### Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

#### on objects

Cmd	When Applied To Object	Action
?	DBRM, Seqno	Display context help information.
++	DBRM, Seqno	Show additional details.
+	DBRM, Seqno	Expand to reveal next level.
-	DBRM, Seqno	Collapse to hide next level.
M	DBRM, Seqno	Display load module information.
P	Seqno	Display source program mapping.
SV	DBRM	Sort next level entries by value.

Cmd	When Applied To Object	Action
SS	DBRM	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data
SD	DBRM	Sort next level entries by service time

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name
SD	Name	Sort next level entries by service time

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by DBRM |
| Enter "/" to select an option           |
|   _ Display Percent used in place of Mean fields |
+-----+

```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each DBRM (Module) and SQL statement, rather than the mean time.

---

## F11 - DB2 SQL CPU/Svc time by stmt

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP CPU times are also recorded.

### Quantification

Each report line shows the following for each SQL statement:

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean service time per SQL call, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

## Detail line hierarchy

An unexpanded F11 report shows a line for each measured SQL request. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 SQL Request
  Level 2 SQL Statement Text
Level 2 SQL Request
  Level 3 SQL Statement Text

```

...

## Detail line descriptions

### SQL request detail line

This is the first-level detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Name	The DBRM name.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc time: Pct	The percent of total service time this statement used.

## SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This sample shows the report with one of the lines expanded to the second level to show SQL text.

```

File View Navigate Help
-----
F11: SQL CPU/Service Time by Statement (1300/CICS23A)          Row 00001 of 00017
Command ==>>> _____ Scroll ==>>> CSR

Seqno  Name      Stmt#  SQL Function  Nbr of  --CPU Time--  --Svc Time--
        Name      Stmt#  SQL Function  SQL Calls Total      Mean      Total      Mean
S00007 PFSAMPC   1466  FETCH        344     1.48     0.00432   2.35     0.00685
S00001 PFSAMPA   816   SELECT       342     0.88     0.00258   1.70     0.00497
      > SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H

S00009 PFSAMPC   3054  FETCH        1,720   0.74     0.00043   1.15     0.00066
S00003 PFSAMPB   678   SELECT       342     0.47     0.00137   0.75     0.00221
S00004 PFSAMPC   1316  SELECT       172     0.42     0.00249   0.76     0.00446
S00010 PFSAMPB   816   UPDATE       172     0.39     0.00231   0.75     0.00441
S00002 PFSAMPB   408   SET HOST VAR 342     0.38     0.00112   0.72     0.00211
S00005 PFSAMPC   1347  SELECT       172     0.27     0.00161   0.48     0.00282
S00014 PFSAMPC   3155  SELECT       172     0.27     0.00160   0.41     0.00243
S00012 PFSAMPC   3179  SELECT       172     0.27     0.00158   0.47     0.00277
S00011 PFSAMPC   2989  SELECT       172     0.22     0.00130   0.38     0.00221
S00008 PFSAMPC   3046  OPEN         172     0.20     0.00121   0.29     0.00170
S00006 PFSAMPC   1443  OPEN         172     0.11     0.00067   0.31     0.00181
S00013 PFSAMPC   1562  CLOSE        172     0.04     0.00028   0.08     0.00048
S00015 PFSAMPC   3065  CLOSE        172     0.03     0.00021   0.05     0.00034

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.
-	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

### on headings

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
-	Seqno	Collapse to show only first level.

Cmd	When Applied To Object	Action
SV	Seqno	Sort next level by value.
SS	Seqno	Sort lines by program and stmt number
SD	Seqno	Sort next level entries by service time

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

+-----+
| Options for DB2 SQL CPU/Svc Time by Stmt |
|                                           |
| Enter "/" to select an option           |
| / Show SQL statements with a positive  |
|   SQLCODE                               |
|   (these are successful calls).         |
|                                           |
| / Show SQL statements with a negative  |
|   SQLCODE                               |
|   (these are failed calls).            |
|                                           |
| / Show SQL statements by statement      |
|   number and ignore differences in     |
|   SQL text.                            |
|                                           |
| /Display Percent used in place of      |
|   Mean fields                           |
|                                           |
+-----+

```

### Show SQL statements with positive SQLCODE

This shows SQL statements that end successfully with a zero or positive SQLCODE. When selected, successful SQL statements are included in the report.

### Show SQL statements with negative SQLCODE

This shows SQL statements that are unsuccessful; that is, with a negative SQLCODE. When selected, unsuccessful SQL statements are included in the report.

### Show SQL statements by statement number

This displays dynamic SQL statements consolidated by statement number and ignores differences in the SQL text. When selected, only one line is displayed per statement number regardless of the contents of the SQL text. The detail window for each statement number displays the SQL information for the first call from this statement.

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each SQL statement, rather than the mean time.

---

## F12 - DB2 SQL CPU/Svc time by plan

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP CPU

times are also recorded. This report shows quantification by DB2 Plan. You can further expand each DB2 Plan line to see a further breakdown and quantification by individual embedded SQL statement.

## Quantification

Each report line shows the following for each DB2 Plan and, when expanded, for each SQL statement observed under the Plan.

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean SQL call service time, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

## Detail line hierarchy

An unexpanded F12 report shows a line for each DB2 Plan under which SQL request were issued. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 DB2 Plan
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
...

```

## Detail line descriptions

### DB2 Plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan under which SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the DB2 plan.
Plan/Pgm	The DB2 Plan name.
Nbr of Calls	The number of SQL calls counted for this DB2 Plan.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this plan used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.

Under Heading	This is Displayed
SVC time: Pct	The percent of total service time this plan used.

### SQL request detail line

This is the second-level detail line shown directly under the DB2 Plan detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name.
Stmnt#	The precompiler statement number of the SQL statement. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function.
Nbr of Calls	The number of SQL calls counted for this statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
SVC time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This sample shows the report with the plan expanded to the second level and one of the SQL statement lines expanded to the third level to show SQL text.

```

File View Navigate Help
-----
F12: SQL CPU/Service Time by Plan (1300/CICS23A) Row 00001 of 00018
Command ==> _____ Scroll ==> CSR
-----
Seqno Plan/PGM Stmt# SQL Function Nbr of SQL Calls --CPU Time-- --Svc Time--
Total Mean Total Mean
P0001 PFSAMPA 4,810 6.25 0.00130 10.73 0.00223
-> S00007 PFSAMPC 1466 FETCH 344 1.48 0.00432 2.35 0.00685
-> S00001 PFSAMPA 816 SELECT 342 0.88 0.00258 1.70 0.00497
    > SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H
-> S00009 PFSAMPC 3054 FETCH 1,720 0.74 0.00043 1.15 0.00066
-> S00003 PFSAMPB 678 SELECT 342 0.47 0.00137 0.75 0.00221
-> S00004 PFSAMPC 1316 SELECT 172 0.42 0.00249 0.76 0.00446
-> S00010 PFSAMPB 816 UPDATE 172 0.39 0.00231 0.75 0.00441
-> S00002 PFSAMPB 408 SET HOST V 342 0.38 0.00112 0.72 0.00211
-> S00005 PFSAMPC 1347 SELECT 172 0.27 0.00161 0.48 0.00282
-> S00014 PFSAMPC 3155 SELECT 172 0.27 0.00160 0.41 0.00243
-> S00012 PFSAMPC 3179 SELECT 172 0.27 0.00158 0.47 0.00277
-> S00011 PFSAMPC 2989 SELECT 172 0.22 0.00130 0.38 0.00221
-> S00008 PFSAMPC 3046 OPEN 172 0.20 0.00121 0.29 0.00170
-> S00006 PFSAMPC 1443 OPEN 172 0.11 0.00067 0.31 0.00181
-> S00013 PFSAMPC 1562 CLOSE 172 0.04 0.00028 0.08 0.00048
-> S00015 PFSAMPC 3065 CLOSE 172 0.03 0.00021 0.05 0.00034

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Seqno	Display context help information.
++	Plan Seqno, Seqno	Show additional details.
+	Plan Seqno, Seqno	Expand to reveal next level.
-	Plan Seqno, Seqno	Collapse to hide next level.
SV	Plan Seqno	Sort next level entries by value.
SS	Plan Seqno	Sort lines by program and statement number.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data
SD	Plan Seqno	Sort next level entries by service time

### on headings

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
-	Seqno	Collapse to show only first level.
SV	Seqno	Sort next level by value.
SD	Seqno	Sort next level entries by service time



## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Plan |
|                                           |
| Enter "/" to select an option          |
|   _ Display Percent used in place of Mean fields |
+-----+
```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each DB2 plan and SQL statement, rather than the mean time.

---

## F13 - DB2 SQL threads analysis

### Usage

Use this report to see information about DB2 threads observed during the sampling of SQL call activity.

### Quantification

Each report line represents a range of REQCT values for one DB2 thread. A new line is reported each time a reset of the REQCT value occurs for the thread (when the value reaches 32767 and is reset to 1).

### Detail line hierarchy

Report F13 shows only one level. The detail lines cannot be expanded.

### Detail line descriptions

#### Thread detail line

Under Heading	This is Displayed
SeqNum	A unique sequence number assigned to the DB2 thread.
Thread Addr	An address of the DB2 'ACE' control block.
Attach	The type of attachment to DB2 for the thread. This can be: CAF, SSRF, CICS, IMS or CIB.
REQCT Range	This is the range of REQCT values observed. The lower value is the first REQCT value observed during any measurement sample. Lower values might have occurred during the measurement which were not sampled. The higher value is the last REQCT value observed during a measurement sample. Higher values might have occurred during the measurement which were not sampled. In the case where the range is a continuation after a REQCT reset, a lower value of 1 will be reported. In the case where the range is followed by another detail line after a REQCT reset, an upper value of 32768 will be reported.

Under Heading	This is Displayed
SQL Calls Executed	The number of SQL calls executed. This number is derived from the REQCT values.
SQL Calls Sampled	This is the number of unique REQCT values within the reported range for which samples occurred. This number will often be significantly lower than the Calls Executed number because the rate of SQL call processing is typically much higher than the measurement sampling rate. Hence, not all SQL calls are sampled.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
F13: DB2 Threads Analysis (3398/CICS23A) Row 00001 of 00020
Command ===> _____ Scroll ===> CSR

```

SeqNum	Thread Addr	Attach	REQCT Range	--- SQL Calls ---	
				Executed	Sampled
000035	167CCAD0	CAF	00003-04003	4,001	844
			Thread Totals	4,001	844
000036	167CCCA8	CAF	00003-04002	4,000	866
			Thread Totals	4,000	866
000037	172B61F8	CAF	00003-04001	3,999	908
			Thread Totals	3,999	908

## F14 - DB2 CPU by plan/stored proc

### Usage

Use this report to see how CPU resource was consumed by each stored procedure measured during the sampling interval. The percentage of time is reported for each DB2 plan under which measured stored procedure activity was recorded. Expand a plan line to see a further breakdown of time consumption by category.

### Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

### Detail line hierarchy

An unexpanded F14 report shows a line for each plan that was measured in the stored procedure address space. You can expand each line to reveal additional hierarchical levels of detail (using the "+" line command).

Only the DB2SQL Category hierarchy is shown here. Activity for the Stored Procedure which is not related to SQL processing will be shown in the SYSTEM,

APPLCN, or NOSYMB categories. For information about these other categories, see “C01 - CPU usage by category” on page 82. The hierarchy is illustrated here:

- Level 1 DB2 Plan
- Level 2 DB2SQL Category
- Level 3 DB2 DBRM
- Level 4 DB2 Load Module

## Detail line descriptions

### DB2 Plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan for which stored procedure measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned to the DB2 plan.
Description	The plan name.
Percent of Time	The percentage of the measurement interval duration stored procedure requests under the indicated DB2 Plan were being processed.

### Category detail line

This is a second-level detail line. This line shows one of five categories to which CPU time has been attributed:

#### APPLCN

Application Code

#### SYSTEM

System/OS Services

#### DB2SQL

SQL Processing

#### DATAMG

Data Management (DASD) Requests

#### NOSYMB

No Module Name Found, any execution measured at locations for which no load module name could be determined is attributed to this category.

As F14 is used for analyzing CPU consumption in DB2 Store Procedures, the category DB2SQL is the one where you should see the majority of the activity. This category and the detail lines under it are described here. For detailed information on the other categories, see “C01 - CPU usage by category” on page 82.

Under Heading	This is Displayed
Seqno	The category name “DB2SQL.”
Description	The category description “SQL Processing.”
Percent of Time	The percentage of the measurement interval duration SQL requests under the indicated DB2 Plan were being processed.

### DB2 DBRM detail line

This is a third-level detail line shown directly under the DB2 Plan detail line. It quantifies the percentage CPU time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the SQL statement.
Description	The DBRM name, DBRM statement number and SQL function.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

### DB2 load module detail line

This is a fourth-level detail line showing activity for DB2 load modules used in the SQL request processing.

Under Heading	This is Displayed
Seqno	The DB2 Load Module name.
Description	If a DPA functional description is found for the module name, it is reported under this heading.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request being processed was in this module.

## Sample reports

A sample report is shown here, it has been expanded to the second level.

```

File View Navigate Help
-----
F14: DB2 CPU by Plan/Stored Proc (0888/CICS23A) Row 00001 of 00019
Command ==>> _____ Scroll ==>> CSR

Seqno      Description                Percent of CPU time * 10.00% ±2.3%
          *...1...2...3...4...5...6...7...8.
P0001     DB2MAIN                    39.68 =====
→ DB2SQL  SQL Processing              38.41 =====
→ SYSTEM  System/OS Services         1.16 =
→ APPLCN  Application Code           0.05
→ NOSYMB  No Module Name             0.05
→ DATAMG  Data Mgmt Processin       0.00

P0002     TRSAMP                     35.29 =====
→ DB2SQL  SQL Processing              34.07 =====
→ SYSTEM  System/OS Services         1.11 =
→ NOSYMB  No Module Name             0.11
→ APPLCN  Application Code           0.00
→ DATAMG  Data Mgmt Processin       0.00

P0003     WLSAMP1M                   24.79 =====
→ DB2SQL  SQL Processing              24.45 =====
→ SYSTEM  System/OS Services         0.33
→ APPLCN  Application Code           0.00
→ DATAMG  Data Mgmt Processin       0.00

```

## Line commands

### on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Category, Seqno, Load Module	Display context help information.
++	Plan Seqno, Category, Seqno, Load Module	Show additional details.

Cmd	When Applied To Object	Action
+	Plan Seqno, Category, Seqno, Load Module	Expand to reveal next level.
-	Plan Seqno, Category, Seqno, Load Module	Collapse to hide next level.
SV	Plan Seqno, Category, Seqno	Sort next level entries by value.
SN	Plan Seqno, Category, Seqno	Sort next level entries by name.
M	Load Module	Display load module information.
P	Load Module, Seqno	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Seqno, Description, Percent of CPU	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Description	Expand description field size
+	Percent of CPU	Zoom in scale.
-	Seqno	Collapse to show only first level.
-	Description	Reduce description field size.
-	Percent of CPU	Zoom out scale.
SV	Seqno	Sort next level by value.
SN	Seqno	Sort next level by name.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
-----+=====
F | Options for DB2 CPU by Plan/Stored Proc | 001 of 00001
C |                                         | ==> CSR
S | Enter "/" to select an option          |
P | / Report modules by "Group". Unselect to report |
  | by "SubGroup". Group is a higher level (more |
  | inclusive) categorization than SubGroup.      |
  | / Show the DB2SQL category in which CPU time |
  | attributed to SQL processing is shown.        |
-----+=====

```

### Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1 and SVCTYPE2.

### Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category. This is not available for CICS measurements.

---

## F15 - DB2 SQL CPU/Svc Time by Rq Loc

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL processing CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Requester Location. You can further expand each line to see a more detailed breakdown and quantification by individual SQL statement.

**Note:** This report is for DDF measurements only.

### Quantification

Each report line shows the following for each Requester Location and, when expanded, for each SQL statement observed for the Requester Location.

- Number of SQL calls
- Total CPU time for the SQL call processing
- Mean SQL call CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Remember that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

### Detail line hierarchy

An unexpanded F15 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the "+" line command). The hierarchy is illustrated here:

```
Level 1 Requester Location
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
```

### Detail line descriptions

#### Requester Location detail line

This is the first-level detail line. Each line shows information about a Requester Location for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The Requester Location name.
Nbr of Calls	The number of SQL calls counted for this Requester Location.
CPU Time: Total	The total CPU time for all SQL calls counted for this Requester Location.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this requestor location used.

Under Heading	This is Displayed
Svc Time: Total	The total service time for all SQL calls for this Requester Location.
Svc Time: Mean	The mean service time per SQL call.
Svc time: Pct	The percent of total service time this requestor location used.

### SQL request detail line

This is the second-level detail line shown directly under the Requester Location detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function, SELECT, FETCH, UPDATE, etc. Nbr of Calls The number of SQL calls counted for this SQL statement.
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This sample shows the report with one location expanded to the third level (SQL text).

```

File View Navigate Help
-----
F15: DB2 SQL CPU/Svc Time by Rq Loc (6783/CICS23A) Row 00001 of 01067
Command ==> _____ Scroll ==> CSR
Name Plan/Pgm Stmt# SQL Functn Nbr of SQL Calls --CPU Time-- --Svc Time--
Total Mean Total Mean
CABNETDB24 295 1.66 0.00562 4.11 0.01394
- D00156 DDF2425A 279 FETCH 1 0.73 0.73480 0.79 0.79001
> Select count(*) from SYSIBM.SYSPACKSTMT
> (PREPARE of SQL was done at Stmt# 269 Seqno D00154)
- D00258 DDF2425A 279 FETCH 1 0.12 0.12491 0.14 0.14127
> Select count(*) from SYSIBM.SYSVLTREE
> (PREPARE of SQL was done at Stmt# 269 Seqno D00256)

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Location, Seqno	Display context help information.
++	Location, Seqno	Show additional details.
+	Location, Seqno	Expand to reveal next level.
-	Location, Seqno	Collapse to hide next level.
P	Seqno	Display source program mapping.
SV	Location	Sort next level entries by value.
SS	Location	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data.
SD	Location	Sort next level entries by service time

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name
SD	Name	Sort next level entries by service time

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:



```

File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Rq Loc |
| Enter "/" to select an option             |
|   _ Display Percent used in place of Mean |
+-----+

```

**Display Percent used in place of Mean fields**

When selected, this displays the percent of total CPU and total service time used by each Requestor Location and SQL statement, rather than the mean time.

## F16 - DB2 SQL CPU/Svc Time by Enclave

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also, this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Enclave token. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

**Note:** This report is for DDF measurements only.

### Quantification

Each report line shows the following for each Enclave token and, when expanded, for each SQL statement observed for the Enclave token.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

### Detail line hierarchy

An unexpanded F16 report shows a line for each Enclave token that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

- Level 1** Enclave token
- Level 2** SQL Request
  - Level 3** SQL Statement Text
- Level 2** SQL Request
  - Level 3** SQL Statement Text

## Detail line descriptions

### Enclave token detail line

This is the first-level detail line. Each line shows information about an Enclave token for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Token	The Enclave token name.
Nbr of SQL Calls	The number of SQL calls counted for this Enclave token.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Enclave token.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this Enclave token used.
Svc Time: Total	The total service time for all SQL calls for this Enclave token.
Svc Time: Mean	The mean service time per SQL call.
SVC time: Pct	The percent of total service time this Enclave token used.

### SQL request detail line

This is the second-level detail line shown directly under the Enclave token detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Token	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This sample shows the report with one Enclave token expanded to the third level (SQL text).

```

File View Navigate Help
-----
F16: DB2 SQL CPU/Svc Time by Enclave (1641/DB2ADIST)          Row 00001 of 01410
Command ==>> _____ Scroll ==>> PAGE

Token      Stmt#  SQL Function          Nbr of  --CPU Time--      --Svc Time--
          SQL Calls  Total    Mean              Total    Mean
00000020-0000017E          1    0.04  0.04177          0.05  0.05652
± D00026      0 EXECUTE IMME          1    0.04  0.04177          0.05  0.05652
  > EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
  > COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
  > ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
  > ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
  > ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
  > ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
  > ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
  > ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
  > ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
  > DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
  > DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
  > ,DEP3_COL3_KEY

00000024-00000198          1    0.04  0.04154          0.04  0.04668
→ D00026      0 EXECUTE IMME          1    0.04  0.04154          0.04  0.04668
  > EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
  > COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
  > ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
  > ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
  > ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
  > ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
  > ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
  > ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
  > ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
  > DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
  > DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
  > ,DEP3_COL3_KEY

00000020-000001A8          1    0.04  0.04167          0.04  0.04925
→ D00026      0 EXECUTE IMME          1    0.04  0.04167          0.04  0.04925
  > EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
  > COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
  > ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Token, Seqno	Display context help information.
++	Token, Seqno	Show additional details.
+	Token, Seqno	Expand to reveal next level.
-	Token, Seqno	Collapse to hide next level.
SV	Token	Sort next level entries by value.
SS	Token	Sort lines by program and statement number.

Cmd	When Applied To Object	Action
SD	Token	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

### on headings

Cmd	When Applied To Object	Action
?	Token	Display context help information.
+	Token	Expand to reveal all entries.
-	Token	Collapse to show only first level.
SV	Token	Sort next level by value.
SN	Token	Sort next level by name.
SD	Token	Sort next level by service time.

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Enclave |
| Enter "/" to select an option                |
|   _ Display Percent used in place of Mean fields |
+-----+

```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Enclave token and SQL statement, rather than the mean time.

---

## F17 - DB2 SQL CPU/Svc Time by Corrid

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Correlation ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

**Note:** This report is for DDF measurements only.

### Quantification

Each report line shows the following for each Correlation ID and, when expanded, for each SQL statement observed for the Correlation ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing

- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

## Detail line hierarchy

An unexpanded F17 report shows a line for each Correlation ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```

Level 1 Correlation ID
Level 2 SQL Request
  Level 3 SQL Statement Text
Level 2 SQL Request
  Level 3 SQL Statement Text

```

## Detail line descriptions

### Correlation ID detail line

This is the first-level detail line. Each line shows information about a Correlation ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Corrid	The Correlation ID name.
Nbr of SQL Calls	The number of SQL calls counted for this Correlation ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Correlation ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this Correlation ID used.
Svc Time: Total	The total service time for all SQL calls for this Correlation ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this Correlation ID used.

### SQL request detail line

This is the second-level detail line shown directly under the Correlation ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Corrid	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.

<b>Under Heading</b>	<b>This is Displayed</b>
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

### **SQL statement text detail line**

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

### **Sample reports**

This sample shows the report with one Correlation ID expanded to the third level (SQL text).

```

File View Navigate Help
-----
F17: DB2 SQL CPU/Svc Time by Corrid (1641/DB2ADIST)          Row 00001 of 00314
Command ==>>> _____ Scroll ==>>> PAGE

Corrid      Stmt#  SQL Function      Nbr of  --CPU Time--  --Svc Time--
              SQL Calls  Total  Mean          Total  Mean
db2bp.exe
± D00026      0 EXECUTE IMME          160    0.63  0.00394    25.92  0.16200
              4          0.16  0.04137     0.20  0.05004
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
> ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
> ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
> ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
> ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
> ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
> ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
> DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
> DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
> ,DEP3_COL3_KEY
± D00007      0 FETCH                4      0.07  0.01895     0.07  0.01983
> ( SELECT T1.FIELD_ONE_KEY AS
> UNION_COLUMN_01 ,T1.FIELD_TWO AS
> UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY =
> T2.DEP1_COL1_KEY1 ) UNION SELECT T3.FIELD_ONE_KEY
> AS UNION_COLUMN_01 ,T3.FIELD_TWO
> AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY =
> T4.DEP2_COL1_KEY ) ) UNION ALL ( SELECT
> T2.FIELD_ONE_KEY AS UNION_COLUMN_01
> ,T2.FIELD_TWO AS UNION_COLUMN_02 FROM
> AIF04.MAIN T2 WHERE NOT EXISTS (SELECT * FROM
> AIF04.DEP1 T1 WHERE T2.FIELD_ONE_KEY =
> T1.DEP1_COL1_KEY1 ) UNION SELECT T4.FIELD_ONE_KEY
> AS UNION_COLUMN_01 ,T4.FIELD_TWO
> AS UNION_COLUMN_02 FROM AIF04.MAIN T4 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP2 T3 WHERE T4.FIELD_ONE_KEY =
> T3.DEP2_COL1_KEY ) )
> (PREPARE of SQL was done at Stmt# 0 Seqno D0005)

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Corrid, Seqno	Display context help information.
++	Corrid, Seqno	Show additional details.
+	Corrid, Seqno	Expand to reveal next level.
-	Corrid, Seqno	Collapse to hide next level.
SV	Corrid	Sort next level entries by value.
SS	Corrid	Sort lines by program and statement number.
SD	Corrid	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

## on headings

Cmd	When Applied To Object	Action
?	Corrid	Display context help information.
+	Corrid	Expand to reveal all entries.
-	Corrid	Collapse to show only first level.
SV	Corrid	Sort next level by value.
SN	Corrid	Sort next level by name.
SD	Corrid	Sort next level by service time.

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Corrid |
|                                             |
| Enter "/" to select an option             |
|   _ Display Percent used in place of Mean |
|                                             |
+-----+
```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Correlation ID and SQL statement, rather than the mean time.

---

## F18 - DB2 SQL CPU/Svc Time by Wkstn

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Workstation ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

**Note:** This report is for DDF measurements only.

### Quantification

Each report line shows the following for each Workstation ID and, when expanded, for each SQL statement observed for the Workstation ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured.



DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

## Detail line hierarchy

An unexpanded F18 report shows a line for each Workstation ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```

Level 1 Workstation ID
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
  
```

## Detail line descriptions

### Workstation ID detail line

This is the first-level detail line. Each line shows information about a Workstation ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Wkstn	The Workstation ID name.
Nbr of SQL Calls	The number of SQL calls counted for this Workstation ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Workstation ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this Workstation ID used.
Svc Time: Total	The total service time for all SQL calls for this Workstation ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this Workstation ID used.

### SQL request detail line

This is the second-level detail line shown directly under the Workstation ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Wkstn	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.

Under Heading	This is Displayed
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

### Sample reports

This sample shows the report with one Workstation id expanded to the third level (SQL text)

```

File View Navigate Help
-----
F18: DB2 SQL CPU/Svc Time by Wkstn (1641/DB2ADIST)          Row 00001 of 00337
Command ==>>> _____ Scroll ==>>> CSR

Wkstn      Stmt#  SQL Function      Nbr of  --CPU Time--      --Svc Time--
           Stmts  SQL Calls  Total  Mean           Total  Mean
-----
D12A3H26           105    0.57  0.00548      0.61  0.00586
± D00016           3     0.11  0.03885      0.13  0.04345
> EXECUTE IMME
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
> ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
> ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
> ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
> ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
> ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
> ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
> DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
> DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
> ,DEP3_COL3_KEY

→ D00020           12     0.08  0.00744      0.09  0.00763
> FETCH
> SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,
> PLANNO
> (PREPARE of SQL was done at Stmt# 0 Seqno D00017)

→ D00019           3     0.08  0.02768      0.08  0.02891
> OPEN
> SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,
> PLANNO
> (PREPARE of SQL was done at Stmt# 0 Seqno D00017)

→ D00034           3     0.05  0.01741      0.05  0.01809
> FETCH
> ( SELECT T1.FIELD_ONE_KEY AS
> UNION_COLUMN_01 ,T1.FIELD_TWO AS
> UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY =
> T2.DEP1_COL1_KEY1 ) UNION SELECT T3.FIELD_ONE_KEY
> AS UNION_COLUMN_01 ,T3.FIELD_TWO
> AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY =
> T4.DEP2_COL1_KEY ) ) UNION ALL ( SELECT

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Wkstn, Seqno	Display context help information.
++	Wkstn, Seqno	Show additional details.
+	Wkstn, Seqno	Expand to reveal next level.
-	Wkstn, Seqno	Collapse to hide next level.
SV	Wkstn	Sort next level entries by value.
SS	Wkstn	Sort lines by program and statement number.
SD	Wkstn	Sort next level entries by service time.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

### on headings

Cmd	When Applied To Object	Action
?	Wkstn	Display context help information.
+	Wkstn	Expand to reveal all entries.
-	Wkstn	Collapse to show only first level.
SV	Wkstn	Sort next level by value.
SN	Wkstn	Sort next level by name.
SD	Wkstn	Sort next level by service time.

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Wkstn |
| Enter "/" to select an option           |
|   _ Display Percent used in place of Mean fields |
+-----+
```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Workstation ID and SQL statement, rather than the mean time.

---

## F19 - DB2 SQL CPU/Svc Time by EndUsr

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by End User ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

**Note:** This report is for DDF measurements only.

### Quantification

Each report line shows the following for each End User ID and, when expanded, for each SQL statement observed for the End User ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

### Detail line hierarchy

An unexpanded F19 report shows a line for each End User ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```
Level 1 End User ID
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
```

### Detail line descriptions

#### End User ID detail line

This is the first-level detail line. Each line shows information about an End User ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
EndUsr	The End User ID name.
Nbr of SQL Calls	The number of SQL calls counted for this End User ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this End User ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this End User ID used.

Under Heading	This is Displayed
Svc Time: Total	The total service time for all SQL calls for this End User ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this End User ID used.

### SQL request detail line

This is the second-level detail line shown directly under the End User ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
EndUsr	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmnt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

### SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

## Sample reports

This sample shows the report with one End User ID expanded to the third level (SQL text).

```

File View Navigate Help
-----
F19: DB2 SQL CPU/Svc Time by EndUsr (1641/DB2ADIST) Row 00001 of 00336
Command ==> _____ Scroll ==> CSR
-----
EndUsr      Stmt#  SQL Function      Nbr of      --CPU Time--      --Svc Time--
              SQL Calls  Total  Mean              Total  Mean
-----
USR01              121    0.67  0.00555          16.74  0.13837
± D00016          0 EXECUTE IMME           3    0.11  0.03885           0.13  0.04345
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
> ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
> ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
> ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
> ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
> ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
> ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
> DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
> DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
> ,DEP3_COL3_KEY

→ D00020          0 FETCH                12    0.08  0.00744           0.09  0.00763
> SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,
> PLANNO
> (PREPARE of SQL was done at Stmt# 0 Seqno D00017)

→ D00019          0 OPEN                  3    0.08  0.02768           0.08  0.02891
> SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,
> PLANNO
> (PREPARE of SQL was done at Stmt# 0 Seqno D00017)

→ D00034          0 FETCH                  3    0.05  0.01741           0.05  0.01809
> ( SELECT T1.FIELD_ONE_KEY AS
> UNION_COLUMN_01 ,T1.FIELD_TWO AS
> UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY =
> T2.DEP1_COL1_KEY1 ) UNION SELECT T3.FIELD_ONE_KEY
> AS UNION_COLUMN_01 ,T3.FIELD_TWO
> AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS
> (SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY =
> T4.DEP2_COL1_KEY ) ) UNION ALL ( SELECT

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	EndUsr, Seqno	Display context help information.
++	EndUsr, Seqno	Show additional details.
+	EndUsr, Seqno	Expand to reveal next level.
-	EndUsr, Seqno	Collapse to hide next level.
SV	EndUsr	Sort next level entries by value.
SS	EndUsr	Sort lines by program and statement number.
SD	EndUsr	Sort next level entries by service time
P	Seqno	Display source program mapping.

Cmd	When Applied To Object	Action
EX	Seqno	Display DB2 EXPLAIN data.

### on headings

Cmd	When Applied To Object	Action
?	EndUsr	Display context help information.
+	EndUsr	Expand to reveal all entries.
-	EndUsr	Collapse to show only first level.
SV	EndUsr	Sort next level by value.
SN	EndUsr	Sort next level by name.
SD	EndUsr	Sort next level by service time.

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Endusr |
|                                             |
| Enter "/" to select an option             |
|   _ Display Percent used in place of Mean fields |
+-----+

```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each End User ID and SQL statement, rather than the mean time.

---

## F20 - DB2 Class 3 Wait Times

### Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This report shows quantification of DB2 Class 3 wait times in micro seconds. The wait times are extracted from DB2 SMF records created during the measurement and are accumulated by plan name. This report is only produced when the DB2 SMF configuration option is enabled during installation, and Application Performance Analyzer is able to collect the DB2 accounting trace data from SMF.

### Detail Line descriptions

#### Plan Name

This is the name of the DB2 plan for which the following Class 3 wait times are accumulated.

#### Database I/O

This is the accumulated I/O elapsed wait time for database I/O.

#### Read I/O other

This is the accumulated wait time for read I/O that was done under a thread other than the one being measured.

**Write I/O other**

This is the accumulated wait time for write I/O that was done under a thread other than the one being measured.

**IRLM Lock/Latch**

This is the accumulated wait time due to local contention for locks.

**DB2 Latch**

This is the accumulated wait time due to latch contention.

**Page Latch**

This is the accumulated wait time due to page latch contention.

**Log Write I/O**

This is the accumulated wait time for a log write I/O.

**Log Read**

This is the accumulated wait time for archive reads, active reads, and active log prefetch reads.

**ARC LOG QUIESCE**

This is the accumulated wait time due to processing of ARCHIVE LOG MODE(QUIESCE) commands.

**Phase 1 Write**

This is the accumulated wait time for commit phase 1 database write I/O completion.

**TCP/IP LOB/XML**

This is the accumulated wait time for TCP/IP LOB and XML materialization.

**Glbl Contention**

This is the accumulated wait time due to global contention for parent L-locks.

**Group Messages**

This is the accumulated wait time due to sending of messages to other DB2 members in the data sharing group.

**CF Requests**

This is the accumulated wait time for IXLCACHE and IXLFCOMP asynch requests.

**Drain Lock**

This is the accumulated wait time for a drain lock.

**Claim Release**

This is the accumulated wait time for a drain when waiting for claims to be released.

**Task Switch: COMMIT**

This is the accumulated wait time due to synchronous execution unit switching for DB2 commit, abort, or deallocation processing.

**Task Switch: OPEN/CLOSE**

This is the accumulated wait time due to synchronous execution unit switching to the DB2 Open/Close data set service or the HSM recall service.

**Task Switch: SYSLGRNG**

This is the accumulated wait time due to synchronous execution unit switching to the DB2 SYSLGRNG recording service. This service is also sometimes used for level-id checking for down level detection.



### Task Switch: Data Manager

This is the Accumulated wait time due to synchronous execution unit switching to the DB2 Dataspace Manager Services, which include; Define data set, Extend data set, Delete data set, Reset data set, and VSAM catalog access.

### Task Switch: Other

This is the accumulated wait time due to synchronous execution unit switching to other DB2 service tasks.

## Sample reports

A sample report is shown here.

```
F20: DB2 Class 3 Wait Times (7507/CICS32A)          Row 00001 of 00015
Command ===>                                       Scroll ===> CSR

Plan Name    PFSAMPC

Database I/O          0.105690  Gbl1 Contention      0.000000
Read I/O other        0.122218  Group Messages       0.000000
Write I/O other       0.000000  CF Requests          0.000000
IRLM Lock/Latch      1.147968  Drain Lock           0.000000
DB2 Latch             0.021755  Claim Release        0.000000
Page Latch            0.000000  Task Switch:
Log Write I/O         0.000000  COMMIT                0.111894
Log Read              0.000000  OPEN/CLOSE           0.260264
ARC LOG QUIESCE      0.000000  SYSLGRNG             0.005714
Phase 1 Write         0.000000  Data Manager         0.099253
TCP/IP LOB/XML        0.000000  Other                 0.000000
```

---

## DB2 EXPLAIN report

The DB2 EXPLAIN report is available through the Application Performance Analyzer ISPF interface only, and is displayed by typing the command “EX” on a SQL statement. It is available in most DB2 reports. There are two sources of information for this report: static EXPLAIN data and dynamic EXPLAIN data.

### Usage

Use this report to see the DB2 EXPLAIN information for a particular SQL statement. Each report line represents a row in the result PLAN\_TABLE. You can obtain this report by issuing an “EX” line command against the SQL statement you want explained.

### Static EXPLAIN

Static EXPLAIN data is requested when an “EX” command is issued on a SQL statement, if the DB2X data extractor was selected for the observation request and the SQL statement was bound with the EXPLAIN(YES) option.

Static EXPLAIN data is obtained at the time of the measurement. Any changes made to the DB2 objects since the measurement was requested will not be reflected in the EXPLAIN request.

## Dynamic EXPLAIN

A dynamic EXPLAIN is requested when an “EX” command is issued on a SQL statement that does not have static EXPLAIN data available. Application Performance Analyzer will issue a dynamic EXPLAIN request on the SQL text of the statement you have selected.

**Note:** Not all SQL statements can be the subject of a dynamic EXPLAIN request. Included among these are UPDATE or DELETE statements with a WHERE CURRENT OF clause.

A prerequisite for this report is activation of the DB2+ option during the measurement.

The dynamic EXPLAIN request is executed at the time you request it. It is not issued at the time of the measurement. Thus, any changes made to the DB2 objects since the measurement was requested will affect the dynamic EXPLAIN request. It is valid to select a DECLARE CURSOR or a SELECT INTO statement. Application Performance Analyzer will remove the DECLARE CURSOR clause or the INTO clause before issuing the dynamic EXPLAIN request. It will also substitute any :H host variable placeholders in static SQL statements with a question mark. A dynamic EXPLAIN request can be requested on SQL statements up to 15000 bytes long.

## Field descriptions

The values of certain columns from each row of PLAN\_TABLE are displayed in each report line. To see more detailed information, including values of additional PLAN\_TABLE columns, issue the “++” line command or press the ENTER key. For full descriptions of these columns, refer to *DB2 Universal Database™ for z/OS: Application Programming and SQL Guide*.

Under Heading	This is Displayed
Blk Num	The value of the QBLOCKNO column. This is also an input field. Use the “++” line command or press the ENTER key to display more information about the PLAN_TABLE row.
Plan Num	The value of the PLANNO column.
Mix Op	The value of the MIXOPSEQ column.
Join Mthd	The value of the METHOD column.
Acc Type	The value of the ACCESSTYPE column.
Match Cols	The value of the MATCHCOLS column.
Index Only	The value of the INDEXONLY column.
Sort New	U J O G The values of the SORTN_UNIQ, SORTN_JOIN, SORTN_ORDERBY and SORTN_GROUPBY columns.
Sort Comp	U J O G The values of the SORTC_UNIQ, SORTC_JOIN, SORTC_ORDERBY and SORTC_GROUPBY columns.
Table Name	The value of the TNAME column.

## Sample reports

A sample report is shown here:

File View Navigate Help										
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										
DB2 EXPLAIN (0167/CICS23A)							Row 00001 of 00010			
Command ==>							Scroll ==> CSR			
Blk Num.	Plan Num.	Mix Op	Join Mthd	Acc Type	Match Cols	Index Only	Sort New U J O G	Sort Comp U J O G	Table Name	
0001	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0001	2	0	3		0	N	N N N N	Y N N N		
0002	1	0	0	R	0	N	N N N N	N N N N	DEP1	
0003	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0004	1	0	0	R	0	N	N N N N	N N N N	DEP2	
0005	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0005	2	0	3		0	N	N N N N	Y N N N		
0006	1	0	0	R	0	N	N N N N	N N N N	DEP1	
0007	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0008	1	0	0	R	0	N	N N N N	N N N N	DEP2	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Blk Num	Display context help information.
++	Blk Num	Show additional details.

**Note:** There are no line commands on headings for this report.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown below (shown in three scrollable screen segments).

More: +

## DB2 EXPLAIN Data for Selected Row

Block number 0003  
 Plan number 0001  
 Join method None  
 Table creator USER4  
 Table name MAIN  
 Access type Table space scan  
 Matching columns 0  
 Index creator n/a  
 Index name n/a  
 Index only No  
 Merge join columns 0  
 Correlation name T3  
 Page range screening n/a  
 Join type n/a  
 Query block type SELECT  
 Direct row access n/a

<u>Sort</u>	<u>New</u>	<u>Composite</u>
Unique	No	No
Join	No	No
Order by	No	No
Group by	No	No

Lock mode Intent Share  
 Prefetch Pure sequential  
 Function evaluation After data retrieval and sorting  
 Multiple index operation sequence no. 0

Parallelism Information:

Number of tasks	0
Group identifier	0
Join degree	0
Join group id	0
Sort composite group id	0

File View Navigate Help		More: - +
Sort new table group id	0	
Parallelism mode	n/a	
Descriptive Names Mapped to PLAN_TABLE Column Names		
Descriptive Name	Column Name	
Block number	QBLOCKNO	
Plan number	PLANNO	
Join method	METHOD	
Table creator	CREATOR	
Table name	TNAME	
Access type	ACCESSTYPE	
Matching columns	MATCHCOLS	
Index creator	ACCESSCREATOR	
Index name	ACCESSNAME	
Index only	INDEXONLY	
Unique	SORTN_UNIQ, SORTC_UNIQ	
Join	SORTN_JOIN, SORTC_JOIN	
Order by	SORTN_ORDERBY, SORTC_ORDERBY	
Group by	SORTN_GROUPBY, SORTC_GROUPBY	
Lock mode	TSLOCKMODE	
Prefetch	PREFETCH	
Function evaluation	COLUMN_FN_EVAL	
Multiple index operation sequence no.	MIXOPSEQ	
Number of tasks	ACCESS_DEGREE	
Group identifier	ACCESS_PGROUP_ID	
Join degree	JOIN_DEGREE	
Join group id	JOIN_PGROUP_ID	
Sort composite group id	SORTC_PGROUP_ID	
Sort new table group id	SORTN_PGROUP_ID	
Parallelism mode	PARALLELISM_MODE	
Merge join columns	MERGE_JOIN_COLS	
Correlation name	CORRELATION_NAME	
Page range screening	PAGE_RANGE	
Join type	JOIN_TYPE	

File View Navigate Help		More: -
Query block type	QBLOCK_TYPE	
Direct row access	PRIMARY_ACCESSTYPE	

## DB2SQL category in C01 report

More DB2 measurement data is presented in the C01 CPU Usage by Category report, under the category DB2SQL. If you expand the DB2SQL with the "+" line command, SQL Statement items will be displayed.

A sample is shown here:

```

File View Navigate Help
-----
C01: CPU Usage by Category (0645/CICS23A) Row 00001 of 00014
Command ==> _____ Scroll ==> CSR

```

Name	Description	Percent of CPU time * 10.00% ±2.6%
		*....1....2....3....4....5....6....7....8.
SYSTEM	System/OS Services	76.39 =====
DB2SQL	SQL Processing	17.02 =====
→ 00008	PFSAMPC(1466) FETCH	8.00 ====
→ 00003	PFSAMPB(408) SET HOS	2.10 =
→ 00010	PFSAMPB(816) UPDATE	2.03 =
→ 00004	PFSAMPC(1316) SELECT	1.56 =
→ 00006	PFSAMPC(1347) SELECT	0.94
→ 00002	PFSAMPB(678) SELECT	0.67
→ 00001	PFSAMPA(816) SELECT	0.67
→ 00007	PFSAMPC(1443) OPEN	0.61
→ 00009	PFSAMPC(1562) CLOSE	0.40
APPLCN	Application Code	6.58 ==

You can enter the “+” command to further expand each SQL statement one more level to display a breakdown by load module.

### SQL Statement

This item attributes measured activity to a DB2 SQL statement.

#### Name Column

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequences numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

#### Description Column

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

---

## Chapter 7. MQSeries performance analysis reports

This section describes the MQSeries performance analysis reports.

For information about ...	See ...
The MQSeries data extractor	"Overview of MQSeries data extractor"
Q01 MQSeries activity summary	"Q01 - MQSeries activity summary" on page 418
Q02 MQSeries CPU usage by queue	"Q02 - MQSeries CPU usage by queue" on page 420
Q03 MQSeries CPU usage by request	"Q03 - MQSeries CPU usage by request" on page 423
Q04 MQSeries CPU usage by transaction	"Q04 - MQSeries CPU usage by Txn" on page 425
Q05 MQSeries service time by queue	"Q05 - MQSeries service time by queue" on page 428
Q06 MQSeries Serv Time by Request	"Q06 - MQSeries service time by request" on page 431
Q07 MQSeries service time by transaction	"Q07 - MQSeries service time by Txn" on page 434
Q08 MQSeries wait time by queue	"Q08 - MQSeries wait time by queue" on page 437
Q09 MQSeries wait time by request	"Q09 - MQSeries wait time by request" on page 440
Q10 MQSeries wait time by transaction	"Q10 - MQSeries wait time by Txn" on page 442
Q11 MQ+ Activity Timeline	"Q11 - MQ+ Activity Timeline" on page 445
Q12 MQ+ CPU/SVC Time by Queue	"Q12 - MQ+ CPU/SVC Time by Queue" on page 448
Q13 MQ+ CPU/SVC Time by Request	"Q13 - MQ+ CPU/SVC Time by Request" on page 451
Q14 MQ+ CPU/SVC Time by Txn	"Q14 - MQ+ CPU/SVC Time by Txn" on page 454

---

### Overview of MQSeries data extractor

In order to use the MQSeries Performance Analysis Reports, the MQSeries data extractor must be turned on when the Observation Request is entered. You must select the MQS data extractor in the Enter an Observation Request panel.

This data extractor provides the ability to observe/sample and report on MQSeries interface calls (both dynamic and static) in Batch, IMS and CICS programs. More specifically, to show the CPU and wait time spent in MQSeries interface calls and to attribute the time spent to a particular MQSeries interface call.

When the MQSeries data extractor is selected, Application Performance Analyzer will record the following information in the sample file for each MQSeries call that it observes:

- Environment (Batch, IMS or CICS)
- Load module that issued the call
- Offset within the load module of the return address from the MQ call
- Type of MQI call (MQOPEN, MQGET, etc.)
- Queue Manager name
- Object name (for example, the queue name)
- Message size (actual length for MQPUT/MQPUT1, buffer length for MQGET)
- MQ Options (for MQOPEN, MQGET, MQPUT MQCLOSE)
- Message type, priority and persistence
- Transaction ID (CICS and IMS)

**Note:** In an IMS environment, Application Performance Analyzer might not be able to determine the default Queue Manager name for some samples if the Application Performance Analyzer task has not previously sampled any. This might result in the MQ object name being unknown for the first few calls. Subsequent sampling runs will obtain the MQ object name for each sample.

### The MQ+ extractor

MQ+ is a measurement option where the precise number of MQ calls, the exact MQ service time, and CPU time by MQ call are counted. When you select the MQ+ option, Application Performance Analyzer captures the data that is required to produce the MQ+ timeline and service time reports Q11 through Q14.

Selecting the MQ+ option has a small impact on the performance of the target address space. Be careful when you use the MQ+ feature with other products that also intercept MQ calls because unpredictable results might occur. Your installer can choose to limit access to this feature.

## Q01 - MQSeries activity summary

### Usage

Use this report to see a summary of the MQSeries requests (Calls) issued during the observation session and a list of the MQSeries objects referenced by these requests.

### Detail line descriptions

#### Access to the following MQSeries objects observed

Each referenced object is described under this heading. For each object, the following information is reported:

Under Heading	This is Displayed
Object Seq. Nbr	A unique sequence number assigned by Application Performance Analyzer to each unique object.
Object Manager Name	The name of the MQSeries Queue Manager – usually four characters. This name is combined with the object name to fully qualify the name.



Under Heading	This is Displayed
Object Name	A one to 48 character MQSeries object name. Some functions do not reference an object. In this case, Application Performance Analyzer shows an entry with 'n/a' in this field.
Object Type	The type of object. One of the following is shown: <ul style="list-style-type: none"> <li>• Queue</li> <li>• Namelist</li> <li>• Process</li> <li>• Storage Class</li> <li>• Queue Manager</li> <li>• Channel</li> <li>• Auth Info</li> <li>• CF Structure</li> <li>• Alias Queue</li> <li>• Model Queue</li> <li>• Local Queue</li> <li>• Remote Queue</li> <li>• Sender Channel</li> <li>• Server Channel</li> <li>• Reqstr Channel</li> <li>• Recvr Channel</li> <li>• Current® Channel</li> <li>• Saved Channel</li> <li>• SVRCON Channel</li> <li>• CLNTCON Channel</li> </ul>

### MQSeries calls observed

Each observed MQSeries request is listed under this heading. For each request, the following information is reported:

Under Heading	This is Displayed
Module	The name of the load module that issued the MQSeries request.
CSECT	The name of the CSECT in the module containing the MQSeries CALL.
Offset	The hexadecimal offset in the CSECT of the return address to the CALL.
Function	The MQSeries function: <ul style="list-style-type: none"> <li>• CONNECT</li> <li>• DISCONN</li> <li>• OPEN</li> <li>• CLOSE</li> <li>• GET</li> <li>• PUT</li> <li>• PUT1</li> <li>• COMMIT</li> <li>• BACKOUT</li> <li>• INQUIRE</li> <li>• SET</li> </ul>
Queue Mgr	The Queue Manager name.
Object Name	The object name.

## Sample reports

A sample report is shown here:

```
File View Navigate Help
-----
Q01: MQSeries Activity Summary (0643/MQTST01) Row 00001 of 00023
Command ==> _____ Scroll ==> CSR

Access to the Following MQSeries Objects Observed

Object Sequence Number 0001
Queue Manager Name CSQ1
Object Name n/a

Object Sequence Number 0002
Queue Manager Name CSQ1
Object Name SYSTEM.DEFAULT.ALIAS.QUEUE
Object Type Queue

MQSeries Calls Observed

Module CSECT Offset Function Queue Mgr Object Name
MQBCS01 MQBCS01 0030A4 CONNECT CSQ1
MQBCS01 MQBCS01 00313E OPEN CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 00334C PUT CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 0033DC CLOSE CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 0033DC CLOSE CSQ1
MQBCS01 MQBCS01 003452 COMMIT CSQ1
MQBCS01 MQBCS01 0034c8 DISCONN CSQ1
```

---

## Q02 - MQSeries CPU usage by queue

### Usage

Use this report to see how CPU resources were consumed by MQSeries Requests. The percentage of CPU usage is reported by MQSeries Queue Name. Expand the Queue Name detail lines to see a further breakdown by individual MQSeries Request.

### Quantification

Each report line quantifies CPU usage for an MQSeries Queue Name. This is further broken down by MQSeries Request.

### Detail line hierarchy

An unexpanded Q02 report shows a line for each MQSeries Queue. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```
Level 1 MQSeries Queue
Level 2 MQSeries Request
Level 2 MQSeries Request
```

...

### Detail line descriptions

#### MQSeries queue detail line

This is the first-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

### MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies CPU usage for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of CPU Time	The percentage of CPU time consumed while executing the indicated MQSeries Request.

## Sample reports

A sample report is shown here. It has been fully expanded by entering “+” on the Name field.

```

File View Navigate Help
-----
Q02: MQSeries CPU Usage by Queue (0643/MQTST01)          Row 00001 of 00010
Command ==>>> _____ Scroll ==>> CSR

Name      Description      Percent of CPU time * 10.00% ±2.8%
          *....1....2....3....4....5....6....7.
CSQ1     SYSTEM.DEFAULT.ALIAS.QUEUE  75.90 =====
→ PUT    MQBCS01+334C      75.50 =====
→ OPEN   MQBCS01+313E      0.32
→ CLOSE  MQBCS01+33DC      0.08

CSQ1     No Object Name      8.83 ===
→ CONNECT MQBCS01+30A4      7.06 ===
→ DISCONN MQBCS01+34C8      1.60 =
→ CLOSE  MQBCS01+33DC      0.08
→ COMMIT MQBCS01+3452      0.08

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Queue, Request	Display context help information.
++	Queue, Request	Show additional details.
+	Queue	Expand to reveal next level.



---

## Q03 - MQSeries CPU usage by request

### Usage

Use this report to see how CPU resources were consumed by MQSeries Requests. The percentage of CPU usage is reported by MQSeries Request. Expand the MQSeries Request lines to see a further breakdown by MQSeries Queue.

### Quantification

Each report line quantifies CPU usage for an MQSeries Request. This is further broken down by MQSeries Queue Name.

### Detail line descriptions

#### MQSeries request detail line

This is a first-level detail line shown directly under the MQSeries Queue detail line. It quantifies CPU usage for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of CPU Time	The percentage of CPU time consumed while executing the indicated MQSeries Request.

#### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

## Sample reports

A sample report is shown here:

File View Navigate Help			
Q03: MQSeries CPU Usage by Request (0643/MQTST01)			Row 00001 of 00007
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±2.8%
PUT	MQBCS01+334C	75.50	=====
CONNECT	MQBCS01+30A4	7.06	===
DISCONN	MQBCS01+34C8	1.60	=
OPEN	MQBCS01+313E	0.32	
CLOSE	MQBCS01+33DC	0.08	
CLOSE	MQBCS01+33DC	0.08	
COMMIT	MQBCS01+3452	0.08	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.
++	Request, Queue	Show additional details.
+	Request	Expand to reveal next level.
-	Request	Collapse to hide next level.
P	Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:



Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries Requests were issued. "Batch" is shown here for request not issued under control of a CICS or IMS transaction.
Description	"CICS Transaction" or "IMS Transaction". "Not in IMS/CICS Txn" is shown here if the request was not issued under control of a CICS or IMS transaction.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests under control of the indicated transaction.

### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

### MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies CPU usage for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of CPU Time	The percentage of CPU time consumed while executing the indicated MQSeries Request.

## Sample reports

A sample report is show here. It has been fully expanding by entering "+" on the Name heading.



```

File View Navigate Help
-----
Q04: MQSeries CPU Usage by Txn/Queue (0025/MQTST01)          Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±2.8%
          *.....1.....2.....3.....4.....5.....6.....7.
MQS1      CICS Transaction      13.71 =====
→ CSQ1    CSQ1.DEFXMIT.QUEUE    13.20 =====
→ GET     MQSAMP1+2DF2          10.92 =====
→ OPEN    MQSAMP1+2C2C          1.94 =
→ CLOSE   MQSAMP1+31A0          0.34
→ CSQ1    No Object Name        0.50
→ CLOSE   MQSAMP1+31A0          0.50

MQDR      CICS Transaction      8.03 =====
→ CSQ1    CSQ1.DEFXMIT.QUEUE    7.80 =====
→ PUT     CSQ4CVK1+284E         5.65 ===
→ OPEN    CSQ4CVK1+277E         1.86 =
→ CLOSE   CSQ4CVK1+29E2         0.28
→ CSQ1    No Object Name        0.23
→ CLOSE   CSQ4CVK1+29E2         0.12

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Transactions, Queue, Request	Display context help information.
++	Transactions, Queue, Request	Show additional details.
+	Transactions, Queue	Expand to reveal next level.
-	Transactions, Queue	Collapse to hide next level.
SV	Transactions, Queue	Sort next level by value.
SN	Transactions, Queue	Sort next level by name.
P	Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT      MQBCS01+334C      78.70 000000000000000000000000|
+-----+

Calculation Details
MQ Series CPU measurements      1,201
Total CPU measurements          1,526
Percent of total                 78.70%

MQSeries Request Details
Calling Module  MQBCS01
CSECT          MQBCS01
Offset         00334C
Request Type   PUT
Queue Manager  CSQ1
Object Name    SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type    Queue
```

---

## Q05 - MQSeries service time by queue

### Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by MQSeries Queue Name. Expand the Queue Name detail lines to see a further breakdown by individual MQSeries Request.

### Quantification

Each report line quantifies service time for an MQSeries Queue Name. The service time is the actual time measured MQSeries requests were being processed. This is further broken down by MQSeries Request.

### Detail line hierarchy

An unexpanded Q05 report shows a line for each MQSeries Queue. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

- Level 1 MQSeries Queue
- Level 2 MQSeries Request
- Level 2 MQSeries Request

...

### Detail line descriptions

#### MQSeries queue detail line

This is the first-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies time consumed during executions of a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### Sample reports

A sample report is show here. It has been fully expanded by pressing “+” on the Name heading.

```

File View Navigate Help
-----
Q05: MQSeries Service Time by Queue (0025/MQTST01)          Row 00001 of 00010
Command ==>>> _____ Scroll ==>>> CSR

Name      Description      Percent of time * 10.00% ±0.9%
          *...1...2...3...4...5...6...7.
CSQ1      CSQ1.DEFXMIT.QUEUE  29.71 =====
→ GET     MQSAMP1+2DF2        14.79 =====
→ PUT     CSQ4CVK1+284E       8.56  ===
→ OPEN    CSQ4CVK1+277E       2.64  =
→ OPEN    MQSAMP1+2C2C        2.54  =
→ CLOSE   CSQ4CVK1+29E2       0.61
→ CLOSE   MQSAMP1+31A0        0.55

CSQ1      No Object Name      0.90
→ CLOSE   MQSAMP1+31A0       0.50
→ CLOSE   CSQ4CVK1+29E2     0.39

```

### Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)



```

File View Navigate Help
+*****+
+*****- The following report line was selected *****
| -> PUT      MQBCS01+334C      60.38 =====
+*****-

Calculation Details
The 60.38% quantification represents 1,102 samples during
which the indicated MQSeries request was being serviced
The percentage is the portion of the total session elapsed
time of 1,825 samples.

MQSeries Request Details
Calling Module  MQBCS01
CSECT          MQBCS01
Offset         00334C
Request Type   PUT
Queue Manager  CSQ1
Object Name    SYSTEM.DEFAULT.ALIAS.QUEUE
Object Type    Queue
+*****+

```

## Q06 - MQSeries service time by request

### Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by MQSeries Request. Expand the MQSeries Request lines to see a further breakdown by MQSeries Queue.

### Quantification

Each report line quantifies service time for an MQSeries Request. This is further broken down by MQSeries Queue Name.

### Detail line hierarchy

An unexpanded Q06 report shows a line for each MQSeries Request. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```

Level 1 MQSeries Request
Level 2 MQSeries Queue
Level 2 MQSeries Queue

```

...

### Detail line descriptions

#### MQSeries request detail line

This is a first-level detail line shown directly under the MQSeries Queue detail line. It quantifies consumption of time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.

Under Heading	This is Displayed
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

## Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
Q06: MQSeries Service Time by Request (0643/MQTST01)          Row 00001 of 00007
Command ==>>> _____ Scroll ==>>> CSR

Name      Description      Percent of time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7.
-----
PUT       MQBCS01+334C      60.38 =====
CONNECT  MQBCS01+30A4      10.84 =====
DISCONN  MQBCS01+34C8      1.42 =
COMMIT   MQBCS01+3452      1.09 =
OPEN     MQBCS01+313E      0.21
CLOSE    MQBCS01+33DC      0.05
CLOSE    MQBCS01+33DC      0.05

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.
++	Request, Queue	Show additional details.



---

## Q07 - MQSeries service time by Txn

### Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by CICS or IMS transaction. Expand the transaction detail lines to see a further breakdown by MQSeries Queue and by individual MQSeries Request.

### Quantification

Each report line quantifies time consumed by MQSeries requests in a CICS or IMS transaction. This is further broken down by MQSeries Queue and by MQSeries Request.

### Detail line hierarchy

An unexpanded Q07 report shows a line for each CICS or IMS transaction. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

**Level 1** CICS/IMS Transaction  
**Level 2** MQSeries Queue  
**Level 3** MQSeries Request  
**Level 3** MQSeries Request

...

### Detail line descriptions

#### CICS/IMS transaction detail line

This is the first-level detail line. Each line shows information about a CICS or IMS transaction under which MQSeries requests were issued.

Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries Requests were issued. "Batch" is shown here for request not issued under control of a CICS or IMS transaction.
Description	"CICS Transaction" or "IMS Transaction." "Not in IMS/CICS Txn" is shown here if the request was not issued under control of a CICS or IMS transaction.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests under control of the indicated transaction were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

#### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.



Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies time consumption for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

## Sample reports

A fully expanded report is shown here:

```

File View Navigate Help
-----
Q07: MQSeries Service Time by Txn/Queue (0025/MQTST01)      Row 00001 of 00015
Command ==>>> _____ Scroll ==>>> CSR

Name      Description      Percent of time * 10.00% ±0.9%
          *...1...2...3...4...5...6...7.
MQS1      CICS Transaction  18.40 =====
  → CSQ1    CSQ1.DEFXMIT.QUEUE  17.89 =====
    → GET      MQSAMP1+2DF2        14.79 =====
    → OPEN     MQSAMP1+2C2C        2.54 =
    → CLOSE    MQSAMP1+31A0        0.55
  → CSQ1    No Object Name      0.50
    → CLOSE    MQSAMP1+31A0        0.50

MQDR      CICS Transaction  12.21 ====
  → CSQ1    CSQ1.DEFXMIT.QUEUE  11.82 ====
    → PUT      CSQ4CVK1+284E        8.56 ==
    → OPEN     CSQ4CVK1+277E        2.64 =
    → CLOSE    CSQ4CVK1+29E2        0.61
  → CSQ1    No Object Name      0.39
    → CLOSE    CSQ4CVK1+29E2        0.39

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Queue, Request	Display context help information.
++	Transaction, Queue, Request	Show additional details.
+	Transaction, Queue	Expand to reveal next level.
-	Transaction, Queue	Collapse to hide next level.
SV	Transaction, Queue	Sort next level by value.
SN	Transaction, Queue	Sort next level by name.
P	Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:



Under Heading	This is Displayed
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time during executions of a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

## Sample reports

A fully expanded report is shown here:

```

File View Navigate Help
-----
Q08: MQSeries Wait Time by Queue (0025/MQTST01) Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of time * 10.00% ±0.9%
          *...1...2...3...4...5...6...7.
CSQ1      CSQ1.DEFXMIT.QUEUE  5.80 ==
  → GET      MQSAMP1+2DF2        3.01 ==
  → PUT      CSQ4CVK1+284E       1.60 =
  → OPEN     CSQ4CVK1+277E       0.59
  → OPEN     MQSAMP1+2C2C        0.38
  → CLOSE    CSQ4CVK1+29E2       0.18
  → CLOSE    MQSAMP1+31A0        0.01

CSQ1      No Object Name      0.10
  → CLOSE    MQSAMP1+31A0        0.08
  → CLOSE    CSQ4CVK1+29E2       0.01

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

## on objects

Cmd	When Applied To Object	Action
?	Queue, Request	Display context help information.
++	Queue, Request	Show additional details.
+	Queue	Expand to reveal next level.
-	Queue	Collapse to hide next level.
SV	Queue	Sort next level by value.
SN	Queue	Sort next level by name.
P	Request	Display source program mapping.

## on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT      MQBCS01+334C          19.55 0000000000      |
+-----+

Calculation Details
MQ Series wait measurements          444
Total measurements                   2,270
Percent of total                     19.55%

MQSeries Request Details
Calling Module  MQBCS01
CSECT          MQBCS01
Offset         00334C
Request Type   PUT
Queue Manager  CSQ1
Object Name    SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type    Queue
  
```

---

## Q09 - MQSeries wait time by request

### Usage

Use this report to see how much wait time occurred during processing of MQSeries Requests. The percentage of wait time is reported by MQSeries Request. Expand the MQSeries Request lines to see a further breakdown by MQSeries Queue.

### Quantification

Each report line quantifies wait time for an MQSeries Request. This is further broken down by MQSeries Queue Name.

### Detail line hierarchy

An unexpanded Q09 report shows a line for each MQSeries Request. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

**Level 1** MQSeries Request  
**Level 2** MQSeries Queue  
**Level 2** MQSeries Queue

...

### Detail line descriptions

#### MQSeries request detail line

This is a first-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

#### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.

Under Heading	This is Displayed
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

## Sample reports

A sample report is shown here:

Name	Description	Percent of time * 10.00% ±2.3%
COMMIT	MQBCS01+3452	1.04 =
CONNECT	MQBCS01+30A4	0.38
DISCONN	MQBCS01+34C8	0.21

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.
++	Request, Queue	Show additional details.
+	Request	Expand to reveal next level.
-	Request	Collapse to hide next level.
P	Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT      MQBCS01+334C      19.55 0000000000      |
+-----+

Calculation Details
MQ Series wait measurements      444
Total measurements                2,270
Percent of total                  19.55%

MQSeries Request Details
Calling Module  MQBCS01
CSECT          MQBCS01
Offset         00334C
Request Type   PUT
Queue Manager  CSQ1
Object Name    SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type    Queue
+-----+
```

---

## Q10 - MQSeries wait time by Txn

### Usage

Use this report to see how much wait time occurred during processing of MQSeries Requests. The percentage of wait time is reported by CICS or IMS transaction. Expand the transaction detail lines to see a further breakdown by MQSeries Queue and by individual MQSeries Request.

### Quantification

Each report line quantifies wait time in MQSeries requests in a CICS or IMS transaction. This is further broken down by MQSeries Queue and by MQSeries Request.

### Detail line hierarchy

An unexpanded Q10 report shows a line for each CICS or IMS transaction. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

- Level 1** CICS/IMS Transaction
- Level 2** MQSeries Queue
- Level 3** MQSeries Request
- Level 3** MQSeries Request

...



## Detail line descriptions

### CICS/IMS transaction detail line

This is the first-level detail line. Each line shows information about a CICS or IMS transaction under which MQSeries requests were issued.

Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries requests were issued. "Batch" is shown here for requests not issued under control of a CICS or IMS transaction.
Description	Either "CICS Transaction" or "IMS Transaction." If the request was not issued under control of a CICS or IMS transaction, "Not in IMS/CICS Txn" will be displayed.
Percent of Time	The percentage of the measurement interval duration during which MQSeries requests under control of the indicated transaction were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

### MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

## Sample reports

A fully expanded report is shown here:

File View Navigate Help		
Q10: MQSeries Wait Time by Transaction (0025/MQTST01)		Row 00001 of 00015
Command ==>		Scroll ==> CSR
Name	Description	Percent of time * 2.5% ±0.9%
		*...1...2...3...4...5...6...7.
MQS1	CICS Transaction	3.64 =====
→ CSQ1	CSQ1.DEFXMIT.QUEUE	3.62 =====
→ GET	MQSAMP1+2DF2	3.01 =====
→ OPEN	MQSAMP1+2C2C	0.59 =
→ CLOSE	MQSAMP1+31A0	0.01
→ CSQ1	No Object Name	0.01
→ CLOSE	MQSAMP1+31A0	0.01
MQDR	CICS Transaction	2.25 ====
→ CSQ1	CSQ1.DEFXMIT.QUEUE	2.17 ====
→ PUT	CSQ4CVK1+284E	1.60 ===
→ OPEN	CSQ4CVK1+277E	0.38 =
→ CLOSE	CSQ4CVK1+29E2	0.18
→ CSQ1	No Object Name	0.08
→ CLOSE	CSQ4CVK1+29E2	0.08

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Queue, Request	Display context help information.
++	Transaction, Queue, Request	Show additional details.
+	Transaction, Queue	Expand to reveal next level.
-	Transaction, Queue	Collapse to hide next level.
SV	Transaction, Queue	Sort next level by value.
SN	Transaction, Queue	Sort next level by name.
P	Request	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent of Time	Zoom out scale.

Cmd	When Applied To Object	Action
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT      MQBCS01+334C      19.55 0000000000      |
+-----+

Calculation Details
MQ Series wait measurements      444
Total measurements                2,270
Percent of total                  19.55%

MQSeries Request Details
Calling Module  MQBCS01
CSECT          MQBCS01
Offset         00334C
Request Type   PUT
Queue Manager  CSQ1
Object Name    SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type    Queue
  
```

## Q11 - MQ+ Activity Timeline

### Usage

Use the Q11 report to see information about the chronology of MQ calls that are intercepted during the measurement. You can also use the Q11 report to identify calls with excessive service times and CPU times. Each line shows information about one intercepted MQ call. You must enable the MQ+ feature before the measurement performs.

By default, the detail lines are sorted in ascending chronological sequence. You can also request that the data is sorted by service time. Enter the **SD line** command on the “Seqno” heading field to sort in this sequence. This will bring MQ calls that might have excessive service times to the top of the report.

The number of MQ calls that is displayed in the Q11 report is limited by the value of the MQIMaxTraceSize parameter that is specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request if your installation has configured this field. The report is truncated when the number of MQ calls issued reaches the value that is specified for MQIMaxTraceSize.

## Quantification

Each report line shows the following information for each MQ call:

- The type of call and where it originated.
- The length of the message.
- The time of the call.
- The service time (duration) for the MQ call processing.
- The CPU time for the MQ call processing.

The CPU time applies only to the region being measured. MQ runs in multiple address spaces and CPU might also be consumed in other MQ regions.

## Detail Line Hierarchy

An unexpanded report shows a line for each MQ call that is intercepted by the MQ+ feature. You can expand each line to reveal one additional hierarchical level of detail by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Call Details
  Level 2 MQ Queue Manager and Queue
  ...
```

## Detail Line Descriptions

### MQ Call detail line

MQ Call detail line is the first-level detail line. Each line shows information about one MQ call.

Under Heading	This is Displayed
Seqno	A unique sequence number that is assigned by Application Performance Analyzer
Call	The MQ call type
Location	The CSECT and offset where the call originated
Msg Len	The length of the MQ message
Call Time	The time of day at which the MQ call was issued
Svc Time	The service time (duration) of the MQ call in seconds
CPU Time	The CPU time that the MQ call consumed in seconds

### MQ Queue Manager and Queue Name detail line

MQ Queue Manager and Queue Name detail line is second-level detail line. The MQ Queue Manager and Queue Name detail line displays the MQ queue manager name and the queue name that is used in the request.

## Sample Report

An expanded sample report is shown as follows:

```

-----
Q11: MQ+ Activity Timeline (0098/CICS42A)                               Row 00001 of 03172
-----
Seqno  Call      Location                Msg Len  Call Time  Svc Time  CPU Time
-----
00001  Put       CSQ4CVK1+4FC2         200     9:06:38.82  0.00076  0.00076
->CSQ7  CSQ7.DEFXMIT.QUEUE
00002  Close    CSQ4CVK1+5176         0       9:06:38.82  0.00027  0.00027
->CSQ7
00003  Open     CSQ4CVK1+4EDA         0       9:06:38.85  0.00045  0.00045
->CSQ7  CSQ7.DEFXMIT.QUEUE
00004  Put       CSQ4CVK1+4FC2         200     9:06:38.85  0.00072  0.00072
->CSQ7  CSQ7.DEFXMIT.QUEUE
00005  Put       CSQ4CVK1+4FC2         200     9:06:38.85  0.00060  0.00060
->CSQ7  CSQ7.DEFXMIT.QUEUE
00006  Close    CSQ4CVK1+5176         0       9:06:38.86  0.00020  0.00021
->CSQ7
00007  Open     MQSAMP1+3AB8          0       9:06:38.86  0.00050  0.00050
->CSQ7  CSQ7.DEFXMIT.QUEUE
-----

```

## Line commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. You can enter a forward slash (/) on any input field to pop up a menu of line commands that are available for that field.

### on objects

Cmd	When Applied To:	Action
?	Call, Queue	Displays context help information.
++	Call	Shows additional details.
+	Call	Expands to reveal next level.
-	Call	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts by Call Time.
SD	Seqno	Sorts by Svc Time (Duration).

## Detail window

To display a popup window that contains additional information, press the plus sign (+) twice or **Enter** on any MQ Call detail line. For example, if you press the plus sign (+) twice, the following detail window appears:

```
+-----+
| Q11 - DETAIL Window (0097/IMSDMPP5) |
+-----+
| +----- The following report line was selected -----+ |
| | 00012  Get  MQICS02+525A      112  6:51:00.94  0.00168  0.00072 | |
| +-----+ |
| MQ Call Information |
| Call Time          16:51:00.94      Service time      0.00168 |
| Call type          Get                CPU time         0.00072 |
| Location            DFSSAM02 in MQICS02  Offset of         0000525A |
| Completion Code     0                  Reason Code       0 |
| Message Type        Datagram           Message Size      112 |
| Priority             0                  Persistent        No |
| Object Type         Queue |
| Call Options        Browse |
| Object Name         SYSTEM.DEFAULT.LOCAL.QUEUE |
| MQ Server Information |
| Queue Manager       CSQ7                Version           07.1.0 |
+-----+
```

---

## Q12 - MQ+ CPU/SVC Time by Queue

### Usage

Use this report to see an analysis of how much time MQ calls that are intercepted during the observation session use. The analysis is arranged by queue manager. To use the Q12 report, you must activate MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by MQ call, expand a Queue Manager report line.

### Quantification

Each report line shows the following information for each MQ call.

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Mean service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent that is used in place of the mean fields, use the setup option.

## Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ Queue Manager and Queue. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Queue Manager and Queue
  Level 2 MQ Call
  ...
```

## Detail Line Descriptions

### MQ queue manager detail line

MQ queue manager detail line is the first-level detail line. The MQ queue manager detail line shows the MQ queue manager summary.

Under Heading	This is Displayed
Name	The name of the queue manager
Description	The queue name
Nbr of Calls	The number of MQ calls that are counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this queue. Large numbers are expressed in thousands with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this queue. Large numbers are expressed in thousands with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this queue. Large numbers are expressed in thousands with an M suffix.
Svc Time: Total	The total service time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.

### MQ Call detail line

MQ Call detail line is the second-level detail line. The MQ Call detail line is displayed directly under the MQ queue manager detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.

Under Heading	This is Displayed
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

## Sample reports

A sample report is shown as follows. The queue manager is expanded to the second level MQ call.

```

-----
Q12: MQ+ CPU/SVC Time by Queue (0098/CICS42A)                               Row 00001 of 00008
-----
Name      Description                               Nbr of  --CPU Time--  --Svc Time--
         Description                               Calls   Total   Mean      Total   Mean
CSQ7     CSQ7.DEFXMIT.QUEUE                          1,189   0.96    0.00081   1.91    0.00161
->Put     CSQ4CVK1+4FC2                               393     0.36    0.00092   0.64    0.00163
->Get     MQSAMP1+3C4C                                400     0.37    0.00092   0.64    0.00160
->Open    MQSAMP1+3AB8                                200     0.13    0.00065   0.48    0.00241
->Open    CSQ4CVK1+4EDA                               196     0.10    0.00053   0.14    0.00075
CSQ7     CSQ7.DEFXMIT.QUEUE                          397     0.09    0.00025   0.14    0.00035
->Close   CSQ4CVK1+5176                               197     0.04    0.00023   0.06    0.00035
->Close   MQSAMP1+401A                                200     0.05    0.00026   0.07    0.00036

```

## Line Commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. To open a menu of line commands available for any input fields, enter a forward slash (/) on the field.

### on objects

Cmd	When Applied To:	Action
?	Queue, Call	Displays context help information.
++	Queue, Call	Shows additional details.
+	Queue	Expands to reveal next level.
-	Queue	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

### on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
-	Name	Collapses to hide next level.
SV	Name	Sorts by Call Time.



Cmd	When Applied To Heading	Action
SD	Name	Sorts by Total Svc Time (Duration).

## Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a queue is shown as follows:

```

+-----+
| Q12 - DETAIL Window (0098/CICS42A) |
+-----+
| ----- The following report line was selected ----- |
| CSQ7  CSQ7.DEFXMIT.QUEUE  1,189  0.96  0.00081  1.91  0.00161 |
+-----+

Queue Identification
Queue Manager                CSQ7
Object Name                   CSQ7.DEFXMIT.QUEUE
Number of MQ Calls            1,189
Total CPU Time (seconds)      0.96875
Mean CPU per Call (seconds)   0.00081
Total Service Time (seconds)  1.91547
Mean Time per Call (seconds)  0.00161
+-----+

```

## SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

### Display Percent used in place of Mean fields.

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.

## Q13 - MQ+ CPU/SVC Time by Request

### Usage

Use Q13 report to see an analysis of how much time the MQs that are intercepted use during the observation session. The analysis is arranged by MQ call. To use Q13 report, you must activate the MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by queue, expand an MQ call report line.

### Quantification

Each report line shows the following information for each MQ call:

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Mean service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent used in place of the mean fields, use a setup option.

## Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ call. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Call
  Level 2 MQ Queue Manager and Queue
  ...
```

## Detail Line Descriptions

### MQ Call detail line

MQ Call detail line is the first-level detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

### MQ queue manager detail line

MQ queue manager detail line is the second-level detail line. The MQ queue manager detail line shows the MQ queue manager and queue that is used by the call.

Under Heading	This is Displayed
Name	The queue manager name
Description	The queue name
Nbr of Calls	The number of MQ calls counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.



## on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
-	Name	Collapses to hide next level.
SV	Name	Sorts by Total CPU Time.
SD	Name	Sorts by Total Svc Time (Duration).

## Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a queue is shown as follows:

```
+-----+
| Q13 - DETAIL Window (0098/CICS42A) |
+-----+
| +----- The following report line was selected -----+ |
| | Put      CSQ4CVK1+4FA2      393    0.36  34.11    0.64  31.33| |
| +-----+ |
| Request Identification |
| Location                CSQ4CVK1+4FA2 |
| Number of MQ Calls      393 |
| Total CPU Time (seconds) 0.36164 |
| Percent CPU Time        34.11 |
| Total Service Time (seconds) 0.64235 |
| Percent Service Time    31.33 |
+-----+
```

## SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

### Display Percent used in place of Mean fields.

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.

---

## Q14 - MQ+ CPU/SVC Time by Txn

### Usage

Use the Q14 report to see an analysis of how much time MQ calls that are intercepted during the observation session use. The analysis is arranged by CICS or IMS transaction. The Q14 report applies to CICS and IMS observations only. Before you use the Q14 report, you must activate the MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by queue, expand an MQ call report line.

## Quantification

Each report line shows the following information for each MQ call.

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Total service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent that is used in place of the mean fields, use a setup option.

## Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ call. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

**Level 1** Transaction Name and Description  
**Level 2** MQ Queue Manager and Queue  
**Level 3** MQ Call  
...

## Detail Line Descriptions

### Transaction detail line

Transaction detail line is the first-level detail line. The transaction detail line shows the transaction that issues the MQ call.

Under Heading	This is Displayed
Name	The CICS or IMS transaction ID.
Description	The transaction description if available.
Nbr of Calls	The number of MQ calls counted for this transaction. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this transaction. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for all MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this transaction. Large numbers are expressed in minutes with an M suffix.

Under Heading	This is Displayed
Svc Time: Pct	The percent of total service time for MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.

## MQ queue manager detail line

MQ queue manager detail line is the second-level detail line. The MQ queue manager detail line shows the MQ queue manager and queue that is used by the call.

Under Heading	This is Displayed
Name	The queue manager name
Description	The queue name
Nbr of Calls	The number of MQ calls counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.

## MQ Call detail line

MQ Call detail line is the third-level detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

## Sample reports

A sample report that is expanded two levels is shown as follows:

```

-----
Q14: MQ+ CPU/SVC Time by Txn (0098/CICS42A)                               Row 00001 of 00006
-----
Name      Description                               Nbr of  --CPU Time--  --Svc Time--
                                                                   
                                                                   
                                                                   
                                                                   
                                                                   
                                                                   
                                                                   
                                                                   
                                                                   
M QS1      800      0.55      0.00069      1.19      0.00149
→CSQ7     CSQ7.DEFXMIT.QUEUE      600      0.50      0.00083      1.12      0.00187
→CSQ7     No Object Name         200      0.05      0.00026      0.07      0.00036
MQDR      786      0.51      0.00065      0.85      0.00109
→CSQ7     CSQ7.DEFXMIT.QUEUE      589      0.46      0.00079      0.79      0.00134
→CSQ7     No Object Name         197      0.04      0.00023      0.06      0.00035

```

## Line Commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. To open a menu of line commands available for any input fields, enter a forward slash (/) on the field.

### on objects

Cmd	When Applied To:	Action
?	Transaction, Queue, Call	Displays context help information
++	Transaction, Queue, Call	Shows additional details.
+	Transaction, Queue	Expands to reveal next level.
-	Transaction, Queue	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

### on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
-	Name	Collapses to hide next level.
SV	Name	Sorts by Total CPU Time.
SV	Name	Sorts by Total CPU Time.

## Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a transaction is shown as follows:

```
+-----+
| Q14 - DETAIL Window (0098/CICS42A) |
+-----+
|----- The following report line was selected -----+
| MQS1                800    0.55  52.28    1.19  58.48 |
+-----+

Transaction Identification
Transaction Name                MQS1
Number of MQ Calls              800
Total CPU Time (seconds)        0.55419
Percent CPU Time                52.28
Total Service Time (seconds)    1.19887
Percent Service Time            58.48
+-----+
```

## SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

### **Display Percent used in place of Mean fields.**

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.



---

## Chapter 8. Java/USS/HFS performance analysis reports

This section describes the Java performance analysis reports.

For information about ...	See ...
The Java data extractor	"Overview of Java data extractor" on page 460
J01 Java summary and attributes	"J01 - Java summary and attributes" on page 463
J02 Java heap usage timeline	"J02 - Java heap usage timeline" on page 465
J03 Java CPU usage by thread	"J03 - Java CPU usage by thread" on page 467
J04 Java CPU usage by package	"J04 - Java CPU usage by package" on page 469
J05 Java CPU usage by class	"J05 - Java CPU usage by class" on page 471
J06 Java CPU usage by method	"J06 - Java CPU usage by method" on page 474
J07 Java CPU usage by call path	"J07 - Java CPU usage by call path" on page 477
J09 Java service time by package	"J09 - Java service time by package" on page 480
J10 Java service time by class	"J10 - Java service time by class" on page 483
J11 Java service time by method	"J11 - Java service time by method" on page 486
J12 java service time by call path	"J12 - Java service time by call path" on page 489
J14 Java wait time by package	"J14 - Java wait time by package" on page 492
J15 Java wait time by class	"J15 - Java wait time by class" on page 495
J16 Java wait time by method	"J16 - Java wait time by method" on page 498
J17 Java wait time by call path	"J17 - Java wait time by call path" on page 501
H01 HFS Service Time by Path Name	"H01 - HFS Service Time by Path Name" on page 504
H02 HFS Service Time by Device	"H02 - HFS Service Time by Device" on page 506
H03 HFS File Activity	"H03 - HFS File Activity" on page 509
H04 HFS File Attributes	"H04 - HFS File Attributes" on page 511
H05 HFS Device Activity	"H05 - HFS Device Activity" on page 512
H06 HFS Device Attributes	"H06 - HFS Device Attributes" on page 514
H07 HFS Activity Timeline	"H07 - HFS Activity Timeline" on page 515
H08 HFS Wait Time by Path Name	"H08 - HFS Wait Time by Path Name" on page 517
H09 HFS Wait Time by Device	"H09- HFS Wait Time by Device" on page 519

For information about ...	See ...
H10 HFS Service Time by Request	"H10- HFS Service Time by Request" on page 522
H11 HFS Wait Time by Request	"H11- HFS Wait Time by Request" on page 524

---

## Overview of Java data extractor

In order to use the Java Performance Analysis Reports, the Java data extractor must be turned on when the Observation Request is entered. You must select the Java data extractor in the Schedule New Measurement panel.

The Java data extractor collects Java call stack information for each Java application thread. The call stack information identifies the methods in the call chain. Information about each method includes the package (if any), class, method and signature (parameter types and return type), and the source line number being executed (if available).

---

## Considerations for Java

Before Java programs can be sampled, the J9VM support in Application Performance Analyzer must be enabled. Contact your systems programmer to verify whether this support is enabled.

Measuring a Java application requires loading a JVMTI agent to obtain Java samples. There are two ways that this can be accomplished:

- Use a preloaded JVMTI agent. This is the recommended option.  
This option loads the JVMTI agent when the target Java job is started. The agent remains alive until the Java job terminates. The agent sits in a wait state until a sampling session is requested. After the sampling session completes, the agent returns to a wait state.
- Use a dynamically loaded JVMTI agent.  
This option loads the JVMTI agent at the time that a sampling session is started. The JVMTI agent is loaded using the Java Attach API. The agent runs only for the duration of the sampling session.

Application Performance Analyzer can be configured to support one of these options, not both. Contact your systems programmer to find out which of these two options your installation is using.

Only one observation at a time is supported for a specific Java address space.

IMS Java programs are supported in Java Message Processing (JMP) and Java Batch Processing (JBP) regions by using the preloaded Application Performance Analyzer JVMTI agent.

CICS Java programs are supported for CICS/TS 4.2 and above.

Application Performance Analyzer will stop sampling Java programs when the main thread ends, even if the specified number of samples has not been reached.

Java measurement reports are unrelated to CPU Usage Analysis and CPU Wait Analysis reports, since Java samples are extracted by running a JVMTI agent asynchronously with CPU samples.

Java calls that are observed with a native method at the top of the call stack are only included in the Service Time reports. This is because the J9VM does not know whether the native method is executing, waiting, or queued for execution.

Java native methods are identified in the method detail pop-up window of Java Service Time reports.

---

## Using a dynamically loaded JVMTI agent

Add the “-Dcom.ibm.tools.attach.enable=yes” runtime parameter to the application being measured, if it is not already set as the system default.

Application Performance Analyzer looks in the /tmp directory for the attach information for Java. If the default temporary directory is not /tmp, you must add the following Java run time parameter to the application being measured:

```
-Dcom.ibm.tools.attach.directory=/tmp/.com_ibm_tools_attach
```

To measure applications running under Java V6 SR6 or SR7, you must run the application with UID=0. This UID=0 restriction is removed with the following Java PTFs:

- Java V6 31-bit SR8 (UK56434)
- Java V6 64-bit SR8 (UK56435)

When measuring applications without UID=0, J9VM may write some OPEN access violations in the system log. These can be ignored, as J9VM is attempting to open tmp directories that require UID=0 access. These directories have no significance to Application Performance Analyzer and will not affect the measurement.

If your installation does not run Application Performance Analyzer with USS superuser privileges (UID=0), then you will only be able to measure Java applications that are running under the same UID as Application Performance Analyzer.

For more information about using the Java Attach API, see the *User Guide for IBM SDK for z/OS* for the Java release you are running.

---

## Using a preloaded JVMTI agent

You must specify the preloaded JVMTI agent in a runtime parameter of the target Java job. The agent is loaded using the Java -agentpath: runtime parameter. Specify the full path name of either the 31-bit JVMTI agent (libCAZJTA11.so) or the 64-bit JVMTI agent (libCAZJTA14.so) depending on whether your target Java job is 31-bit or 64-bit.

The format of the -agentpath runtime parameter is:

```
-agentpath:/dir/agent=stcid,n
```

where:

*dir*

The path to the Application Performance Analyzer JVMTI agent.

*agent*

The name of the Application Performance Analyzer JVMTI agent you are preloading. Use libCAZJTA11.so for 31-bit. Use libCAZJTA14.so for 64-bit.

*stcid*

The Application Performance Analyzer started task Id. This is needed only when you have more than one Application Performance Analyzer started task operating on your system.

*n* The number of minutes to wait for the Application Performance Analyzer started task to become active.

An example of how to specify a preloaded 64-bit JVMTI agent in JCL that uses BPXBATCH to run the Java program *prog* follows. The example assumes that the USS components of Application Performance Analyzer have been installed in a directory named **/usr/lpp/apa/v13r1**, and that there is only one Application Performance Analyzer started task in the system.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v13r1/libCAZJTA14.so prog'
```

If there is more than one Application Performance Analyzer started task in the system, the `-agentpath:` runtime parameter can specify the system id of the started task. The following example shows how to specify that the JVMTI agent is to be loaded for the started task with a system id of CAZ1.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v13r1/libCAZJTA14.so=CAZ1 prog'
```

The JVMTI agent must locate the Application Performance Analyzer started task. By default, it will timeout after 1 minute if the started task is not found. This time limit can be overridden. The example that follows shows how to specify a time limit of 9 minutes.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v13r1/libCAZJTA14.so=CAZ1,9 prog'
```

---

## USS multiple address space measurements

Spawned address spaces and substeps might be generated when measuring USS. Application Performance Analyzer will measure these additional address spaces if you specify a value in the USS observations field in the Schedule New Measurement panel.

When you use this feature, a USS master record will be displayed above all the associated measurements. The master record has a status of **USS**.

An example is shown here:

```

File View Navigate Help
-----
R02: IBM APA for z/OS Observation List (ZRAY)                               Row 00001 of 00221
Command ==>>> _____ Scroll ==>> CSR
-----
ReqNum  Owned By  Description          Job Name  Date/Time          Samples  Status
-----
+-----+
 2385 +  USER1    USS TEST#1         ARAUTEE   Apr-18 19:56       2,500   USS
  → 2386      BPXBATCH RUN              Apr-18 19:56         10   Ended
  → 2387      BPXPREFC *OMVSEX          Apr-18 19:56          7   Ended
  → 2388      BPXPREFC *OMVSEX  *Java*   Apr-18 19:57       2,500   Ended
  → 2389      BPXPREFC STEP1              Apr-18 19:56         29   Ended
  → 2390      BPXPREFC STEP1              Apr-18 19:57       2,500   Ended
  → 2391      BPXPREFC STEP1              Apr-18 19:57       2,500   Ended
  → 2392      BPXPREFC STEP1  *Java*   Apr-18 19:57       2,500   Ended
  → 2393      BPXPREFC STEP1  *Java*   Apr-18 19:57       2,500   Ended
+-----+

```

You can expand the USS master record by entering a “+” on the sequence number. The additional measurements in the expanded record include the original measurement (the initiating step) and any spawned address spaces or substeps.

The description field in the subordinate measurements under the USS master record is populated with the program name and step name. For spawned address spaces, this would normally be BPXPREFC STEP1. For substeps, this would normally be BPXPREFC \*OMVSEX.

If Java is detected in a step, then \*Java\* is placed in the description to the right of the program and step name.

If the step is run from the USS shell, and a Java command string is available, then the Java command string will be placed in the description instead of the information described above.

---

## J01 - Java summary and attributes

### Usage

This report displays general information about the observed Java environment. There are four sections:

- Java Virtual Machines
- Java Packages
- Java Classes
- Java Methods

### Java Virtual Machines

This section identifies Java Virtual Machines (JVMs) observed during the measurement session.

### Java packages

This section lists each of the Java packages in which activity was observed during the measurement session. Each package is assigned a unique sequence number, which is cross referenced in other reports.

## Java classes

This section lists each of the Java classes in which activity was observed during the measurement session. Each class is assigned a unique sequence number, which is cross referenced in other reports.

## Java methods

This section lists each of the Java methods in which activity was observed during the measurement session. Each method is assigned a unique sequence number, which is cross referenced in other reports.

## Warnings and errors

In some circumstances Application Performance Analyzer will be unable to produce complete Java reports when the Java data extractor is turned on during measurement. In this case, a 'Warnings and Errors' section will be displayed in J01 with a message indicating the problem. Please refer to the Application Performance Analyzer *Messages Guide* for specific details of the problem.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
J01: Java Summary/Attributes (8551/JVMTST01) Row 00001 of 00082
Command ==>> _____ Scroll ==>> CSR

Observed Java Virtual Machines (JVMs)

JVmId Identifier Heap Max Description
-----
00001 18754508 1M 67 J2RE 1.4.2 IBM z/OS Persistent Reusable VM
build cm142-20060824 (SR6)

Observed Java Packages

PkgId Package Name
-----
00001 java/util/Zip
00002 java/lang
00003 java/util/jar
00004 sun/misc
00005 java/security
00006 java/net
00007 java/io
00008 com/ibm/jvm/io

Observed Java Classes

ClsId PkgId Class Name
-----
00001 00002 Object
00002 00001 ZipFile
00003 00003 JarFile
00004 00004 URLClassPath$Loader
00005 00004 URLClassPath$JarLoader
00006 00004 URLClassPath$3

Observed Java Methods

MthId ClsId Method Name
-----
00001 00002 open
00002 00002 <init>
00003 00003 <init>
00004 00003 <init>
00005 00005 getJarFile
00006 00005 <init>
00007 00006 run
00008 00007 doPrivileged1
```

---

## J02 - Java heap usage timeline

### Overview

This timeline analysis report breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive resource usage trends. The values under the heading Storage quantify the amount of heap storage allocated by the JVM during the interval.

A SETUP option is available from which you can specify the number of intervals and whether to include total heap storage in the report. Heap storage used is presented in green, and the additional storage to make up the total is presented in white.

### Detail line descriptions

Each line represents reports values under the following headings:

- SEQN
- Storage
- Total

#### SEQN

This is the sequence number of the interval. Intervals are numbered 0001, 0002, etc.

#### Storage

This is the amount of heap storage in use by the Java application. This is an effective measurement of the Java application's demand on central storage. The value is expressed in units of kilobytes (1024 bytes) or megabytes (1048576 bytes). Each line shows the maximum value observed during the particular interval.

#### Total

This is the amount of heap storage allocated to the Java application. This is an effective measurement of the Java application's demand on central storage. The value is expressed in units of kilobytes (1024 bytes) or megabytes (1048576 bytes). Each line shows the maximum value observed during the particular interval.

### Sample reports

A sample report is shown here. It reports on heap usage (green) and heap total (white).

```

File View Navigate Help
-----
J02: Java Heap Usage Timeline (0116/JVMTST01) Row 00001 of 00047
Command ==> _____ Scroll ==> CSR

SEQN  Storage  Total  <----1140K-----2140K-->
*.....+.....+.....+.....+.....+.....+.....+.....+.....+.....*
=====
0001  1615K  2048K  =====
0002  1243K  2048K  =====
0003  1243K  2048K  =====
0004  1243K  2048K  =====
0005  1243K  2048K  =====
0006  1243K  2048K  =====
0007  1243K  2048K  =====
0008  1243K  2048K  =====
0009  1243K  2048K  =====
0010  1341K  2048K  =====
0011  1351K  2048K  =====
0012  1352K  2048K  =====
0013  1352K  2048K  =====
0014  1352K  2048K  =====
0015  1352K  2048K  =====

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	SEQN	Display context help information.
++	SEQN	Show additional details.

## Detail window

You can enter "++" (or the Enter key) on any line to display a popup window containing additional information.

For example, entering "++" on a sequence number will cause this detail window to appear.

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
+ 0001  1615K  2048K -----+
+-----+
Information about sampled interval

Interval Number      1
Nbr of Samples       20
Heap Used            1615K
Heap Total           2048K
+-----+

```

## SETUP options

Enter the SETUP primary command to select options for this report. The following popup will be displayed:



```

File View Navigate Help
+-----+
Options for Memory Usage Timeline                                001 of 00015
                                                                ==> CSR
Number of Intervals . . . . . 15
This is the number of equal time intervals within
the duration of the measurement that are to be
reported. Each report line will show measurement
information for one interval.

/ Report on Heap usage and Heap total, unselect
to report on Heap usage only.
+-----+

```

### Number of Intervals

Use this option to change the number of equal time intervals that are reported.

### Report on Heap usage and total

Select this option to include total heap storage in the report. Heap usage is displayed in green and total heap storage is displayed in white.

## J03 - Java CPU usage by thread

### Usage

Use this report to see how CPU time was consumed by execution of Java programs for each Java thread. The report shows one line for each Java thread. When the JVM reuses a z/OS Task Control Block (TCB), the individual CPU times for the threads cannot be obtained. In this case, the thread name is preceded by a number in parentheses. All threads that have reused a particular TCB will have the same number and the percentage used will indicate the total of all threads using the same TCB.

### Quantification

Each report line quantifies time measured as a percentage of total time. The percentage represents the ratio of the CPU time in the indicated Java thread to the total CPU time consumed during the sampling period.

### Detail line descriptions

#### Java Thread detail line

This report shows one detail line for each unique Java thread.

Under Heading	This is Displayed
JavaID	The unique sequence number assigned to this Java thread.
Thread Name	The name of the thread.
Percent of Time	The percentage of CPU used by this thread out of the total used during the sampling period..

### Sample reports

A sample report is shown here. The (1) before the Thread Name indicates that these threads reused the same TCB.

```

File View Navigate Help
-----
J03: Java CPU Usage by Thread (0116/JVMTST01) Row 0001 of 0012
Command ==> _____ Scroll ==> CSR

JavaId Thread Name Percent of CPU Time * 10.00%
*....1....2....3....4....5....6....7...
0003 (1)Attachment 2305 18.72 =====
0002 (1)Alpha 18.72 =====
0001 main 18.56 =====

Note: Items in parentheses indicate a thread that reused a TCB

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	JavaId	Display context help information.
++	JavaId	Show additional details.

### on headings

Cmd	When Applied To Object	Action
?	JavaId	Display context help information.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a popup window containing additional information.

For example, entering "++" on a sequence number will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
+ 0003 (1)Attachment 2305 18.72 ===== +
+-----+

Calculation Details

Total CPU time      24.99
Thread Name        (1)Attachment 2305
Thread CPU time    4.68
Percent of total   18.72%

```

---

## J04 - Java CPU usage by package

### Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

### Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

### Detail line hierarchy

An unexpanded report shows a line for each Java Package. The name field shows a sequence number assigned to each unique Package. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Package  
**Level 2** Java Class  
**Level 3** Java Method  
**Level 4** Java Line Number

...

### Detail line descriptions

#### Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java Package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java Package.
Percent of Time	The percentage of activity measured in the indicated Java object.

#### Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java Method is displayed in this column.
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or "unknown" if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been fully expanded to show all four levels.

```

File View Navigate Help
-----
J04: Java CPU Usage by Package (0116/JVMTST01) Row 00001 of 00276
Command ==> _____ Scroll ==> CSR

JavaId Pkg/Cls/Mthd Percent of CPU Time * 10.00% ±3.1%
*....1....2....3....4....5....6....7...
00002 java/lang 39.52 =====
→ 00104 StrictMath 20.05 =====
→ 00228 log 10.52 =====
→ 00000 line # unknown 10.52 =====
→ 00226 sqrt 9.53 =====
→ 00000 line # unknown 9.53 =====
→ 00029 Math 15.83 =====
→ 00219 log 10.71 =====
→ 02290 line # 2290 9.04 =====
→ 00000 line # unknown 1.67 =
→ 00227 sqrt 5.01 ===
→ 02312 line # 2312 4.12 ==
→ 00000 line # unknown 0.88
→ 00048 max 0.09
→ 02760 line # 2760 0.09

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.

Cmd	When Applied To Object	Action
-	Package, Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Pkg/Cls/Mthd	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00104      StrictMath      20.05 =====          |
+-----+

Calculation Details
Application code CPU measurements      204
Total CPU measurements                 1,017
Percent of total                       20.05%

Class name:
  StrictMath

Package Name :
  Java/lang

```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

## J05 - Java CPU usage by class

### Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

**Note:** The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

## Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

## Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Class  
**Level 2** Java Method  
**Level 3** Java Line Number

## Detail line descriptions

### Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or "unknown" if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J05: Java CPU Usage by Class (0116/JVMTST01) Row 00001 of 00186
Command ==> _____ Scroll ==> CSR

JavaId Class/Method Percent of CPU Time* 10.00% ±3.1%
*....1....2....3....4....5....6....7...
00102 Burner 32.15 =====
→ 00220 calc 27.72 =====
→ 00221 baby 4.42 ==

00104 StrictMath 20.05 =====
→ 00228 log 10.52 =====
→ 00226 sqrt 9.53 =====

00029 Math 15.83 =====
→ 00219 log 10.71 =====
→ 00227 sqrt 5.01 ===
→ 00048 max 0.09

00019 JarFile 1.37 =
→ 00037 hasClassPathAttribute 0.98
→ 00085 getManifest 0.19
→ 00114 initializeVerifier 0.09
→ 00025 getJarEntry 0.09

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
-	Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Class/Method, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Class/Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00104  calc                27.72 ===== |
+-----+

Calculation Details
Application code CPU measurements      282
Total CPU measurements                 1,017
Percent of total                       27.72%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample
```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J06 - Java CPU usage by method

### Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

**Note:** The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

### Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.



## Detail line hierarchy

An unexpanded report shows a line for each Java method. The name field shows a sequence number assigned to each unique method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Method  
Level 2 Java Line Number

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or "unknown" if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J06: Java CPU Usage by Method (0116/JVMST01) Row 00001 of 00186
Command ==> _____ Scroll ==> CSR

MthId Method Percent of CPU Time * 10.00% ±3.1%
*.....1.....2.....3.....4.....5.....6.....7...
00220 calc 27.72 =====
→ 00029 line # 29 25.46 =====
→ 00024 line # 24 1.37
→ 00036 line # 36 0.29
→ 00027 line # 27 0.19
→ 00026 line # 26 0.19
→ 00000 line # unknown 0.19

00219 log 10.71 =====
→ 02290 line # 2290 9.04 =====
→ 00000 line # unknown 1.67 =

00228 log 10.52 =====
→ 00000 line # unknown 10.52 =====

00226 sqrt 9.53 =====
→ 00000 line # unknown 9.53 =====

00227 sqrt 5.01 =====
→ 02312 line # 2312 4.12 =====
→ 00000 line # unknown 0.88
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00220  calc                27.72 ===== |
+-----+

Calculation Details
Application code CPU measurements      282
Total CPU measurements                 1,017
Percent of total                       27.72%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample

```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

## J07 - Java CPU usage by call path

### Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each different call path. (A call path represents a path of control in the form: A calls B calls C calls D ... etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

### Quantification

The first-level report line quantifies CPU time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

### Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Method  
 Level 2 Calling Java Method Line

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J07: Java CPU Usage by Call Path (0116/JVMTST01)          Row 00001 of 01831
Command ==>>> _____ Scroll ==>>> CSR

MthId  Method                                     Percent of CPU Time * 10.00%  ±3.1%
      *....1....2....3....4....5....6....7...
00220  calc                                       25.36 =====
  → 00221  line 16 baby
  → 00218  line 25 main

00228  log                                       10.42 =====
  → 00219  line 2290 log
  → 00220  line 29 calc
  → 00221  line 16 baby
  → 00218  line 25 main

00226  sqrt                                       9.43 =====
  → 00227  line 2312 sqrt
  → 00220  line 29 calc
  → 00221  line 16 baby
  → 00218  line 25 main

00219  log                                       8.94 =====
  → 00220  line 29 calc
  → 00221  line 16 baby
  → 00218  line 25 main
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

## on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

## on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00220   calc                               27.72 ===== |
+-----+

Calculation Details
Application code CPU measurements          282
Total CPU measurements                    1,017
Percent of total                          27.72%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample

```

## J09 - Java service time by package

### Usage

Use this report to see how service time was consumed by execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

### Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

### Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** Java Package
- Level 2** Java Class
- Level 3** Java Method
- Level 4** Java Line Number

## Detail line descriptions

### Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java package.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J09: Java Service Time by Package (0116/JVMTST01)          Row 00001 of 01831
Command ==>> _____ Scroll ==>> CSR

JavaId  Pkg/Cls/Mthd                Percent of Time * 10.00%  ±2.4%
*....1....2....3....4....5....6....7...
00002  java/lang                    33.01 =====
→ 00104  StrictMath                   16.50 =====
→ 00029  Math                         12.87 =====
→ 00005  ClassLoader                  1.01 =
→ 00010  String                       0.65
→ 00017  ClassLoader$NativeLibrar    0.47
→ 00040  StringBuffer                 0.29
→ 00096  Thread                      0.29
→ 00021  Runtime                     0.11
→ 00022  System                      0.11
→ 00077  Character                   0.11
→ 00057  Class                       0.11
→ 00097  Shutdown                    0.11
→ 00001  Object                      0.05
→ 00047  StringCoding                0.05
→ 00049  StringCoding$DecoderCach   0.05
→ 00079  Throwable                   0.05
→ 00103  FloatingDecimal            0.05

00020  com/baseamps/sample        28.84 =====
→ 00102  Burner                     28.84 =====

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.
-	Package, Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Pkg/Cls/Mthd	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.



Cmd	When Applied To Object	Action
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00104  StrictMath          16.50 ===== |
+-----+

Calculation Details
Application code CPU measurements          277
Total measurements                        1,678
Percent of total                          16.50%

Class Name:
  StrictMath

Package Name:
  java/lang

```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J10 - Java service time by class

### Usage

Use this report to see how service time was consumed by execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

**Note:** The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

### Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

## Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Class  
    **Level 2** Java Method  
        **Level 3** Java Line Number

## Detail line descriptions

### Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J10: Java Service Time by Class (0116/JVMTST01) Row 00001 of 00208
Command ==>> _____ Scroll ==>> CSR

JavaId Class/Method Percent of Time * 10.00% ±2.4%
*....1....2....3....4....5....6....7...
00102 Burner 28.84 =====
→ 00220 calc 23.95 =====
→ 00221 baby 4.88 ==

00104 StrictMath 16.50 =====
→ 00226 sqrt 8.28 ===
→ 00228 log 8.22 ===

00029 Math 12.87 =====
→ 00219 log 8.52 ===
→ 00227 sqrt 4.23 ==
→ 00048 max 0.11

00018 ZipFile 1.54 =
→ 00049 getEntry 0.77
→ 00062 open 0.59
→ 00039 getInflater 0.05
→ 00054 read 0.05
→ 00035 getEntry 0.05

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
-	Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Class/Method, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Class/Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00220  calc                23.95 ===== |
+-----+

Calculation Details
Application code activity measurements      402
Total measurements                          1,678
Percent of total                            23.95%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample
```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J11 - Java service time by method

### Usage

Use this report to see how service time was consumed by execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

**Note:** The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

### Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

## Detail line hierarchy

An unexpanded report shows a line for each Java method. The name field shows a sequence number assigned to each unique method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Method  
**Level 2** Java Line Number

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J11: Java Service Time by Method (0116/JVMTST01) Row 00001 of 00313
Command ==>> _____ Scroll ==>> CSR

JavaId Class/Method Percent of CPU Time * 10.00% ±2.4%
*....1....2....3....4....5....6....7...
00220 calc 23.95 =====
→ 00029 line # 29 21.51 =====
→ 00024 line # 24 1.31 =
→ 00036 line # 36 0.41
→ 00027 line # 27 0.35
→ 00000 line # unknown 0.23
→ 00026 line # 26 0.11

00219 log 8.52 =====
→ 02290 line # 2290 6.19 =====
→ 00000 line # unknown 2.32 =

00226 sqrt 8.28 =====
→ 00000 line # unknown 8.28 =====

00228 log 8.22 =====
→ 00000 line # unknown 8.22 =====

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00220  calc                23.95 ===== |
+-----+

Calculation Details
Application code activity measurements      402
Total measurements                          1,678
Percent of total                            23.95%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample
```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J12 - Java service time by call path

### Usage

Use this report to see how service time was consumed by execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each call path. (A call path represents a path of control in the form: A calls B calls C calls D, etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

### Quantification

The first-level report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

## Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Method  
**Level 2** Calling Java Method Line

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.
Percent of Time	The percentage of activity measured in the indicated Java object.



## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J12: Java Service Time by Call Path (0116/JVMTST01) Row 00001 of 02766
Command ==> _____ Scroll ==> CSR

MthId Method Percent of Time * 10.00% ±2.4%
*....1....2....3....4....5....6....7...
00220 calc 21.45 =====
→ 00221 line 16 baby
→ 00218 line 25 main

00226 sqrt 8.22 ====
→ 00227 line 2312 sqrt
→ 00220 line 29 calc
→ 00221 line 16 baby
→ 00218 line 25 main

00228 log 8.16 ====
→ 00219 line 2290 log
→ 00220 line 29 calc
→ 00221 line 16 baby
→ 00218 line 25 main

00219 log 6.13 ===
→ 00220 line 29 calc
→ 00221 line 16 baby
→ 00218 line 25 main

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.

Cmd	When Applied To Object	Action
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a line number will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00218   line 25 main                               |
+-----+

Calculation Details
Application code activity measurements           1
Total measurements                               1,678
Percent of total                                 0.05%

Method Name:
main[Ljava/lang/String;)V

Method Descriptor:
(I)D

Method Signature:
main(java.lang.String[]) void

Class Name:
Burner3Test

```

---

## J14 - Java wait time by package

### Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

### Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in a wait state, to the total number of samples.

### Detail line hierarchy

An unexpanded report shows a line for each Java package. The name field shows a sequence number assigned to each unique package. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1 Java Package
- Level 2 Java Class
- Level 3 Java Method
- Level 4 Java Line Number

## Detail line descriptions

### Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java package.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java Class.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J14: Java Wait Time by Package (0116/JVMTST01) Row 00001 of 00022
Command ==>> _____ Scroll ==>> CSR

JavaId Pkg/Cls/Mthd Percent of Time * 2.50% ±2.4%
*....1....2....3....4....5....6....7...
00006 java/util/zip 0.89 ==
→ 00018 ZipFile 0.89 ==

00002 java/lang 0.77 ==
→ 00005 ClassLoader 0.35 =
→ 00096 Thread 0.23
→ 00017 ClassLoader$NativeLibrar 0.05
→ 00057 Class 0.05
→ 00021 Runtime 0.05

00018 com/dovetail/jzos 0.23
→ 00078 ZFile 0.23

00005 java/io 0.17
→ 00098 FileInputStream 0.11
→ 00012 UnixFileSystem 0.05

00007 java/util/jar 0.05
→ 00019 JarFile 0.05

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.
-	Package, Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Pkg/Cls/Mthd	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00018  ZipFile                                0.89 == |
+-----+

Calculation Details
Application code wait time measurements      15
Total measurements                          1,678
Percent of total                             0.89%

Class Name:
ZipFile

Package Name:
java/util/zip
```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J15 - Java wait time by class

### Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

**Note:** The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

### Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (class, method or line) was in a wait state, to the total number of samples.

### Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

- Level 1** Java Class
- Level 2** Java Method
- Level 3** Java Line Number

## Detail line descriptions

### Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or "unknown" if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J15: Java Wait Time by Class (0116/JVMTST01) Row 00001 of 00033
Command ==> _____ Scroll ==> CSR

JavaId Class/Method Percent of Time * 2.50% ±2.4%
*....1....2....3....4....5....6....7...
00018 ZipFile 0.89 ==
→ 00049 getEntry 0.65 =
→ 00062 open 0.23

00005 ClassLoader 0.35 =
→ 00139 findBootstrapClass 0.35 =

00029 ZFile 0.23
→ 00173 fopen 0.23

00096 Thread 0.23
→ 00203 start 0.23

00098 FileInputStream 0.11
→ 00207 readBytes 0.11

00019 JarFile 0.05
→ 00037 hasClassPathAttribute 0.05

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
-	Class, Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	JavaId, Class/Method, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	JavaId	Collapse to show only first level.
-	Class/Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00049  getEntry          0.65 |
+-----+

Calculation Details
Application code wait time measurements      11
Total measurements                          1,678
Percent of total                             0.65%

Method Name:
  getEntry

Method Descriptor:
  (Ljava/lang/String;)J

Method Signature:
  getEntry(long, java.lang.String) long

Class Name:
  ZipFile

Package Name:
  java/util/zip
```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

---

## J16 - Java wait time by method

### Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

**Note:** The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

### Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in a wait state, to the total number of samples.



## Detail line hierarchy

An unexpanded report shows a line for each Java Method. The name field shows a sequence number assigned to each unique Method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

**Level 1** Java Method  
**Level 2** Java Line Number

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J16: Java Wait Time by Method (0116/JVMTST01) Row 00001 of 00035
Command ==> _____ Scroll ==> CSR

JavaId Class/Method Percent of CPU Time * 2.50% ±2.4%
*.....1.....2.....3.....4.....5.....6.....7...
00049 getEntry 0.65 =
→ 00000 line # unknown 0.65 =

00139 findBootstrapClass 0.35 =
→ 00000 line # unknown 0.35 =

00062 open 0.23
→ 00000 line # unknown 0.23

00173 fopen 0.23
→ 00000 line # unknown 0.23

00203 start 0.23
→ 00000 line # unknown 0.23

00207 readBytes 0.11
→ 00000 line # unknown 0.11
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

### on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00049  getEntry          0.65 |
+-----+

Calculation Details
Application code wait time measurements      11
Total measurements                          1,678
Percent of total                             0.65%

Method Name:
  getEntry

Method Descriptor:
  (Ljava/lang/String;)J

Method Signature:
  getEntry(long, java.lang.String) long

Class Name:
  ZipFile

Package Name:
  java/util/zip

```

**Note:** If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

## J17 - Java wait time by call path

### Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each call path. (A call path represents a path of control in the form of: A calls B calls C calls D, etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

### Quantification

The first-level report line quantifies WAIT time measured as a percentage of total time, the percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in a wait state, to the total number of samples.

### Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Method  
 Level 2 Calling Java Method Line

## Detail line descriptions

### Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

### Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J17: Java Wait Time by Call Path (0116/JVMTST01)          Row 00001 of 00158
Command ==>>> _____ Scroll ==>>> CSR

MthId  Method                                     Percent of Time * 2.50% ±2.4%
      *.....1.....2.....3.....4.....5.....6.....7...
00049  getEntry                                  0.59 =
→ 00035  line 173 getEntry
→ 00036  line 257 getEntry
→ 00025  line 244 getJarEntry
→ 00037  line 483 hasClassPathAtt
→ 00038  line 29 jarFileHasClassP
→ 00028  line 889 getClassPath
→ 00002  line 351 getLoader
→ 00003  line 205 getResource
→ 00004  line 846 run
→ 00005  doPrivileged1
→ 00006  line 389 doPrivileged
→ 00007  line 371 findClass
→ 00008  line 572 loadClass
→ 00009  line 442 loadClass
→ 00010  line 504 loadClass

00139  findBootstrapClass                        0.29 =
→ 00140  line 1062 findBootstrapC
→ 00008  line 565 loadClass
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

## on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
-	Method	Collapse to hide next level.

## on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
-	MthId	Collapse to show only first level.
-	Method	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00049  getEntry          0.65 |
+-----+

Calculation Details
Application code wait time measurements      11
Total measurements                          1,678
Percent of total                             0.65%

Method Name:
getEntry

Method Descriptor:
(JLjava/lang/String;)J

Method Signature:
getEntry(long, java.lang.String) long

Class Name:
ZipFile

Package Name:
java/util/zip

```

## H01 - HFS Service Time by Path Name

### Usage

Use this report to see how Service time was consumed by HFS file activity during the observation session. Each report line shows an HFS file, listed by path name, for which activity was observed. If HFS file activity was observed during a sample, but could not be attributed to a specific file, the activity is aggregated to a single report line with a path name of "unknown".

### Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS file was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.

### Detail line descriptions

#### HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name.
Percent of Time	The percentage of activity measured in the indicated HFS file.

## Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H01: HFS Service Time by Path Name (8242/JVMTST01)          Row 00001 of 00070
Command ==>> _____ Scroll ==>> CSR

FileId Path Name Percent of Time * 10.00% ±1.0%
*.....1....2....3....4....5....6..
00002 /dev/tty0001 70.36
00000 unknown 66.59
00001 /dev/tty0000 50.49
00063 /tmp/ofile.txt 13.28
00021 /Z18/usr/lpp/java/J1.4/lib/core. 1.59
00080 /Z18/usr/lpp/java/J1.4/lib/core. 1.18
00062 /u/zfs/ofile.txt 0.53
00041 /Z18/usr/lpp/java/J1.4/lib/ext/d 0.32
00032 /Z18/usr/lpp/java/J1.4/lib/ibmor 0.18
00075 /u/zfs/platz 0.18
00044 /Z18/usr/lpp/java/J1.4/lib/ext/i 0.16
00005 /dev/ptyp0001 0.15
00043 /Z18/usr/lpp/java/J1.4/lib/ext/i 0.15
00072 /u/zfs/platz 0.15
00070 /u/zfs/platz 0.14
00036 /u/zfs/platz 0.12

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

### on headings

Cmd	When Applied To Heading	Action
?	FileId, Path Name, Percent of Time	Display context help information.
+	Path Name	Expand description field size.
+	Percent of Time	Zoom in scale.
-	Path Name	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SP	FileId	Sort next level by Path Name.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a FileId will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00002 /dev/ttyp001 70.36 |
+-----+

Calculation Details
HFS file measurements 7.036
Total measurements 10.000
Percent of total 70.36%

HFS File Information
Path name /dev/ttyp001
File type Character Special File Major 2 Minor 1
Opened 7:05:22.45 Friday Mar 16 2007
Device# 4
Serial# 17
Open Flags Read/Write Read_Only Write_Only
Not_a_controlling_terminal

```

## SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00
```

This is the minimum percentage of HFS activity measured for which an item is to be included in the report.

By default, all HFS files with inflight activity during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to files with activity above the specified threshold.

---

## H02 - HFS Service Time by Device

### Usage

Use this report to see how Service time was consumed by HFS device activity during the observation session. The unexpanded report shows an HFS device, listed by device number, for which activity was observed. If HFS file activity was observed during a sample, but could not be attributed to a specific file and device, the activity is aggregated to a single report line with a device number of "unknown". You can further expand each line item to show the HFS files associated with the device.

### Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS device was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.



## Detail line hierarchy

An unexpanded report shows a line for each HFS device. The name field shows a sequence number assigned to each unique device. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:  
Level 1 HFS Device Level 2 HFS File

Level 1 HFS Device  
Level 2 HFS File

## Detail line descriptions

### HFS Device detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#>Path Name	The HFS device number.
Percent of Time	The percentage of activity measured in the indicated HFS device.

### HFS File detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS file.
Device#>Path Name	The HFS file path name..
Percent of Time	The percentage of activity measured in the indicated HFS file.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
H02: HFS Service Time by Device (8242/JVMTST01)          Row 00001 of 00085
Command ===> _____ Scroll ===> CSR

DevId  Device#>PathName          Percent of Time * 10.00%  ±1.0%
*....1....2....3....4....5....6..
00001  4                          85.07
→ 00002  /dev/ttyp0001             70.36
→ 00001  /dev/ttyp0000             50.49
→ 00005  /dev/ptyp0001             0.15
→ 00066  /dev/null                  0.06
→ 00004  /dev/ptyp0000             0.06
→ 00066  /dev/null                  0.04
→ 00066  /dev/null                  0.03
→ 00066  /dev/null                  0.02
→ 00066  /dev/null                  0.02
→ 00066  /dev/null                  0.01
→ 00066  /dev/null                  0.01

00000  unknown                    66.59
00009  8                          13.28
→ 00063  /tmp/ofile.txt            13.28
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	DevId, FileId	Display context help information.
++	DevId, FileId	Show additional details.
+	DevId	Expand to reveal next level.
-	DevId	Collapse to hide next level.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by FileId.
SP	DevId	Sort next level by Path Name.

### on headings

Cmd	When Applied To Heading	Action
?	DevId, Device#>PathName, Percent of Time	Display context help information.
+	DevId	Expand to reveal all entries.
+	Device#>PathName	Expand field size.
+	Percent of Time	Zoom in scale.
-	DevId	Collapse to show only first level.
-	Device#>PathName	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00001  4      85.07 |
+-----+

Calculation Details
HFS device measurements      8.507
Total measurements           10.000
Percent of total              85.07%

HFS Device Information
Device                        4
Dataset name                  HFS.ADCD.DEV
DD name                       SYS00006
Physical file system          HFS
Mount point                   /X235/dev
Mounted                       8:40:24.22 Friday Mar 9 2007

```

## SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00
```

This is the minimum percentage of HFS activity measured for which an item is to be included in the report.

By default, all HFS devices with inflight activity during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to devices with activity above the specified threshold.

---

## H03 - HFS File Activity

### Usage

Use this report to display the Read/Write counts for each HFS file captured during the observation session. Each report line shows an HFS file, listed by path name, and its associated Read/Write count.

### Quantification

Each report line quantifies the Read/Write count by subtracting the Read count at the start of the observation session from the Read count at the end of the observation session; subtracting the Write count at the start of the observation session from the Write count at the end of the observation session; and adding the two differences together.

### Detail line descriptions

#### HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name.
File Type	The HFS file type.

<b>Under Heading</b>	<b>This is Displayed</b>
Reads/Writes	The Read/Write count for the indicated HFS file.

## Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H03: HFS File Activity (8242/JVMTST01) Row 00001 of 00198
Command ==>> _____ Scroll ==>> CSR

```

<u>FileId</u>	<u>Path Name</u>	<u>File Type</u>	<u>Reads/Writes</u>
00063	/tmp/ofile.txt	Regular File	55,985
00021	/Z18/usr/lpp/java/J1.4/lib/core.jar	Regular File	715
00080	/Z18/usr/lpp/java/J1.4/lib/core.jar	Regular File	644
00062	/u/zfs/iface.txt	Regular File	261
00005	/dev/ptyp0001	Character Special File	171
00070	/u/zfs/platz	Regular File	100
00066	/dev/null	Character Special File	98
00036	/u/zfs/platz	Regular File	98
00068	/u/zfs/platz	Regular File	97
00074	/dev/null	Character Special File	96
00035	/dev/null	Character Special File	89
00064	/u/zfs/platz	Regular File	88
00072	/u/zfs/platz	Regular File	88
00069	/dev/null	Character Special File	86
00075	/u/zfs/platz	Regular File	84
00065	/dev/null	Character Special File	74

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

### on headings

Cmd	When Applied To Heading	Action
?	FileId	Display context help information.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SD	FileId	Sort next level by Path Name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering "++" on a FileId will cause this detail window to appear.

```

File View Navigate Help
+-----+
File 00063
Path name      /tmp/ofile.txt
File type      Regular File
Opened         7:08:32.33 Friday Mar 16 2007
Device#        8
Serial#        491
Open Flags     Write_Only Truncate Create

File Activity      Initial          Last          Delta
Read Requests     0                0              0
Write Requests    0                55,985        55,985
Dir I/O Blocks    12               12             0
Blocks Read       1                1              0
Blocks Written    0                55,985        55,985
Bytes Read        12               12             0
Bytes Written     0                2,127,115    2,127,115
+-----+

```

## SETUP options

The SETUP command displays the following options:

Enter "/" to select an option

\_Omit files for which no activity was observed during the measurement interval. Unselect to include all files.

By default, all HFS files are displayed. Select this option to omit HFS files that had no read/write activity during the observation session.

---

## H04 - HFS File Attributes

### Usage

Use this report to see detailed information about each HFS file that was open during the observation session. This is useful as a reference report when working with printed copies of other HFS reports that do not show full HFS file details. (When browsing online, the popup detail windows show this information.)

### Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
FileId	A unique sequence number assigned to the HFS file. This is shown in other HFS reports that display HFS file information.
Path Name	The HFS file path name.
File Type	The HFS file type.
Major	If the file type is Character Special, the associated Major number is displayed.
Minor	If the file type is Character Special, the associated Minor number is displayed.
Opened	The date and time that the file was opened (local time).
Device#	The HFS device number associated with the file.

Under Heading	This is Displayed
Serial#	The HFS file serial number.
Open Flags	All the file Open Flags that are set are listed here.
Mode Flags - File Type	The HFS file type listed in the HFS Mode Flags.
Mode Flags - Permissions	The file permissions (Read/Write/Execute) categorized by Owner, Group, and Other.
Mode Flags - Set Id Flags	The Set Id is indicated by either Userid or Group. The Sticky bit setting is also displayed here (if on).
File Activity	The file activity is listed by category. The initial counts recorded at the start of the observation session, the final counts recorded at the end of the observation, and the delta are all listed.

## Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H04: HFS File Attributes (8242/JVMTST01) Row 00001 of 02162
Command ==> _____ Scroll ==> CSR

HFS file information reported for 115 files.

FileId 00001
Path name      /dev/tty0000
File type      Character Special File Major 2   Minor 0
Opened         6:47:58.93 Friday Mar 16 2007
Device#        4
Serial#        12
Open Flags     Read/Write Read_Only Write_Only
               Not_a_controlling_terminal

File Activity      Initial          Last            Delta
Read Requests     11              12              1
Write Requests    33              40              7
Dir I/O Blocks    19              19              0
Blocks Read       5               5               0
Blocks Written    0               0               0
Bytes Read        14,883          14,901          18
Bytes Written     1,244           1,350           106

```

---

## H05 - HFS Device Activity

### Usage

Use this report to display the Read/Write counts for each HFS device captured during the observation session. Each report line shows an HFS device, listed by device number, and its associated Read/Write count.

### Quantification

Each report line quantifies the Read/Write count by subtracting the Read count at the start of the observation session from the Read count at the end of the observation session; subtracting the Write count at the start of the observation session from the Write count at the end of the observation session; and adding the two differences together.

## Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#	The HFS device number.
Mount Point	The directory at which the file system was mounted.
Reads/Writes	The Read/Write count for the indicated HFS device.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
H05: HFS Device Activity (8242/JVMTST01) Row 00001 of 00009
Command ==>>> _____ Scroll ==>>> CSR

DevId  Device#  Mount Point                Reads/Writes
-----
00009  8        /X235/tmp                  55,985
00004  24       /Z18/usr/lpp/java          6,463
00001  4        /X235/dev                  996
00005  11       /u/zfs                     984
00003  10       /u                          81
00007  12       /Z18/usr/lpp/db2/db2810    12
00008  16       /Z18/usr/lpp/cicsts/cicsts31 12
00002  3        /Z18                       0
00006  7        /X235/etc                  0
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	DevId	Display context help information.
++	DevId	Show additional details.

### on headings

Cmd	When Applied To Heading	Action
?	DevId	Display context help information.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

```

File View Navigate Help
+-----+
Device 00004
Device#           24
Dataset name      JVA140.HFS
DD name           SYS00025
Physical file system HFS
Mount point       /Z18/usr/lpp/java
Mounted           8:40:36.62 Friday Mar 9 2007

Device Activity   Initial           Last           Delta
Read Requests    186,308         192,771        6,463
Write Requests   0               0              0
Dir I/O Blocks   67,554         73,030         5,476
Blocks Read      247,016        258,524       11,508
Blocks Written   0              0              0
Bytes Read       462,232,053    501,613,789   39,381,736
Bytes Written    0              0              0
+-----+

```

## SETUP options

The SETUP command displays the following options:

Enter "/" to select an option

Omit devices for which no activity was observed during the measurement interval. Unselect to include all devices.

By default, all HFS devices are displayed. Select this option to omit HFS devices that had no read/write activity during the observation session.

---

## H06 - HFS Device Attributes

### Usage

Use this report to see detailed information about each HFS device captured during the observation session. This is useful as a reference report when working with printed copies of other HFS reports that do not show full HFS device details. (When browsing online, the popup detail windows show this information.)

### Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to the HFS device. This is shown in other HFS reports that display HFS device information.
Device#	The HFS device number.
Dataset Name	The dataset containing the HFS file system.
DD Name	The DD name assigned to the HFS dataset.
Physical File System	The file system type - HFS, zFS, NFS.
Mount Point	The directory at which the file system was mounted.
Mounted	The date and time that the file system was mounted (local time).



Under Heading	This is Displayed
Device Activity	The device activity is listed by category. The initial counts recorded at the start of the observation session, the final counts recorded at the end of the observation, and the delta are all listed.

## Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H06: HFS Device Attributes (8242/JVMST01) Row 00001 of 0165
Command ==> _____ Scroll ==> CSR

HFS device information reported for 9 devices.

DevId 00001
Device#           4
Dataset name      HFS.ADCD.DEV
DD name           SYS00006
Physical file system HFS
Mount point       /X235/dev
Mounted           8:40:24.22 Friday Mar 9 2007

Device Activity   Initial           Last           Delta
Read Requests    5,922            6,138          216
Write Requests    1,070            1,850          780
Dir I/O Blocks    565              579            14
Blocks Read       56               56             0
Blocks Written    0                0              0
Bytes Read        220,179          221,394        1,215
Bytes Written     70,730           71,540         810

```

## H07 - HFS Activity Timeline

### Usage

Use this report to see, for each HFS file, how activity on the file was distributed over the measurement interval.

### Quantification

A graph, in bar chart format, is displayed for each observed HFS file. The horizontal axis represents the measurement interval which spans 50 columns. Each column represents an equal 1/50th sub-interval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows (roughly) the percentage of time during the sub-interval that activity on the HFS file took place. A vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the sub-interval during which file activity was observed.

### Detail line descriptions

#### HFS Activity Distribution

A group of lines is shown for each reported HFS file. Some information about the HFS files is displayed to the left, and a bar chart is displayed on the right.



```

File View Navigate Help
+-----+
FileId 00002
Path name      /dev/tty0001
File type      Character Special File Major 2      Minor 1
Opened         7:05:22.45 Friday Mar 16 2007
Device#        4
Serial#         17
Open Flags     Read/Write Read_Only Write_Only
               Not_a_controlling_terminal

File Activity      Initial          Last            Delta
Read Requests     7               20             13
Write Requests    29              60             31
Dir I/O Blocks    19              19             0
Blocks Read       5               5              0
Blocks Written    0               0              0
Bytes Read        14,810          15,073         263
Bytes Written     1,829           2,252         423
+-----+

```

## SETUP options

The SETUP command displays the following options:

Enter "/" to select an option

\_Omit files for which no activity was observed during the measurement interval. Unselect to include all files.

By default, all HFS files are displayed. Select this option to omit HFS files that had no read/write activity during the observation session.

---

## H08 - HFS Wait Time by Path Name

### Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS file, listed by path name, for which wait time was observed. If a wait was observed during a sample where there was an inflight HFS request, but could not be attributed to a specific file, the wait is aggregated to a single report line with a path name of "unknown".

### Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS file was in a wait to the total number of samples.

### Detail line descriptions

#### HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name
Percent of Time	The percentage wait time measured for the indicated file.

## Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H08: HFS Wait Time by Path Name (8242/JVMTST01)          Row 00001 of 00046
Command ==>>> _____ Scroll ==>>> CSR

FileId Path Name Percent of Time * 10.00% ±1.0%
*.....1....2....3....4....5....6..
00002 /dev/tty0001 70.29
00000 unknown 66.53
00001 /dev/tty0000 50.46
00021 /Z18/usr/lpp/java/J1.4/lib/core. 0.94
00080 /Z18/usr/lpp/java/J1.4/lib/core. 0.62
00063 /tmp/ofile.txt 0.32
00041 /Z18/usr/lpp/java/J1.4/lib/ext/d 0.31
00062 /u/zfs/ofile.txt 0.24
00032 /Z18/usr/lpp/java/J1.4/lib/ibmor 0.18
00044 /Z18/usr/lpp/java/J1.4/lib/ext/i 0.14
00026 /Z18/usr/lpp/java/J1.4/lib/chars 0.09
00042 /Z18/usr/lpp/java/J1.4/lib/ext/g 0.09
00034 /Z18/usr/lpp/java/J1.4/lib/ibmpk 0.08
00072 /u/zfs/platz 0.08
00075 /u/zfs/platz 0.08
00029 /Z18/usr/lpp/java/J1.4/lib/ibmjg 0.07
00036 /u/zfs/platz 0.07
00054 /Z18/usr/lpp/java/J1.4/lib/ext/r 0.07

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

### on headings

Cmd	When Applied To Heading	Action
?	FileId, Path Name, Percent of Time	Display context help information.
+	Path Name	Expand description field size.
+	Percent of Time	Zoom in scale.
-	Path Name	Reduce description field size.
-	Percent of Time	Zoom out scale.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SP	FileId	Sort next level by Path Name.

## Detail window

You can enter "++" (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Field will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00002  /dev/tty0001                               70.29 |
+-----+

Calculation Details
HFS file wait time measurements      7,029
Total measurements                   10,000
Percent of total                      70.29%

HFS File Information
Path name      /dev/tty0001
File type      Character Special File Major 2      Minor 1
Opened         7:05:22.45 Friday Mar 16 2007
Device#        4
Serial#        17
Open Flags     Read/Write Read_Only Write_Only
               Not_a_controlling_terminal
```

## SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00
```

This is the minimum percentage of HFS wait time measured for which an item is to be included in the report.

By default, all HFS files with wait time during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to files with wait time above the specified threshold.

---

## H09- HFS Wait Time by Device

### Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS device, listed by device number, for which wait time was observed. If a wait was observed during a sample, where there was an inflight HFS request, but could not be attributed to a specific file and device, the wait is aggregated to a single report line with a device number of "unknown". You can further expand each line item to show the HFS files associated with the device.

### Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS device was in a wait to the total number of samples.

### Detail line hierarchy

An unexpanded report shows a line for each HFS device. The name field shows a sequence number assigned to each unique device. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

```
Level 1 HFS Device
Level 2 HFS File
```

## Detail line descriptions

### HFS Device detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#>Path Name	The HFS device number.
Percent of Time	The percentage wait time measured for the indicated HFS device.

### HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS file.
Device#>Path Name	The HFS file path name.
Percent of Time	The percentage activity measured for the indicated HFS file.

## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
H09: HFS Wait Time by Device (8242/JVMTST01) Row 00001 of 00057
Command ==>> _____ Scroll ==>> CSR

DevId  Device#>PathName          Percent of Time * 10.00%  ±1.0%
      *.....1.....2.....3.....4.....5.....6..
00001  4                          84.84
→ 00002  /dev/ttyp0001             70.29
→ 00001  /dev/ttyp0000             50.46

00000  unknown                    66.53
00004  24                          3.27
→ 00021  /Z18/usr/lpp/java/J1.4/lib/core  0.94
→ 00080  /Z18/usr/lpp/java/J1.4/lib/core  0.62
→ 00041  /Z18/usr/lpp/java/J1.4/lib/ext/  0.31
→ 00032  /Z18/usr/lpp/java/J1.4/lib/ibmo  0.18
→ 00044  /Z18/usr/lpp/java/J1.4/lib/ext/  0.14
→ 00026  /Z18/usr/lpp/java/J1.4/lib/char  0.09
→ 00042  /Z18/usr/lpp/java/J1.4/lib/ext/  0.09
→ 00034  /Z18/usr/lpp/java/J1.4/lib/ibmp  0.08
→ 00029  /Z18/usr/lpp/java/J1.4/lib/ibmj  0.07
→ 00054  /Z18/usr/lpp/java/J1.4/lib/ext/  0.07
→ 00081  /Z18/usr/lpp/java/J1.4/lib/grap  0.07
→ 00043  /Z18/usr/lpp/java/J1.4/lib/ext/  0.06

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	DevId, FileId	Display context help information.

Cmd	When Applied To Object	Action
++	DevId, FileId	Show additional details.
+	DevId	Expand to reveal next level.
-	DevId	Collapse to hide next level.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by FileId.
SP	DevId	Sort next level by Path Name.

## on headings

Cmd	When Applied To Heading	Action
?	DevId, Device#>Path Name, Percent of Time	Display context help information.
+	DevId	Expand to reveal all entries.
+	Device#>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
-	DevId	Collapse to show only first level.
-	Device#>Path Name	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00001  4                               84.84          |
+-----+

Calculation Details
HFS device wait time measurements      8.484
Total measurements                     10,000
Percent of total                       84.84%

HFS Device Information
Device#                                4
Dataset name                           HFS.ADCD.DEV
DD name                                 SYS00006
Physical file system                    HFS
Mount point                             /X235/dev
Mounted                                 8:40:24.22 Friday Mar 9 2007
+-----+

```

## SETUP options

The SETUP command displays the following options:

Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS wait time measured for which an item is to be included in the report.

By default, all HFS devices with wait time during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to devices with activity above the specified threshold.

---

## H10- HFS Service Time by Request

### Usage

Use this report to see how Service time was consumed by HFS file requests during the observation session. The unexpanded report shows an HFS request, listed by Request name, for which activity was observed. If an HFS file request was observed during a sample, but could not be attributed to a specific file, the request is aggregated to a single report line with a request name of "unknown". You can further expand each line item to show the HFS files associated with the request.

### Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS request was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.

### Detail line hierarchy

An unexpanded report shows a line for each HFS request. The name field shows a sequence number assigned to each unique request type. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

- Level 1 HFS Request
- Level 2 HFS File

### Detail line descriptions

#### HFS Request detail line

This is the first-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each request type.
Request>Path Name	The HFS request name.
Percent of Time	The percentage activity measured for the indicated HFS request.

#### HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each HFS file.
Request>Path Name	The HFS file path name.
Percent of Time	The percentage activity measured for the indicated HFS file.



## Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
H10: HFS Service Time by Request (8242/JVMTST01) Row 00001 of 00090
Command ==>> _____ Scroll ==>> CSR

ReqId Request>PathName Percent of Time * 10.00% ±1.0%
*....1....2....3....4....5....6..
00001 read 86.02
→ 00002 /dev/tty0000 70.35
→ 00001 /dev/tty0000 50.48
→ 00021 /Z18/usr/lpp/java/J1.4/lib/core 1.52
→ 00080 /Z18/usr/lpp/java/J1.4/lib/core 1.10
→ 00062 /u/zfs/ifile.txt 0.53
→ 00041 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.32
→ 00032 /Z18/usr/lpp/java/J1.4/lib/ibmo 0.18
→ 00075 /u/zfs/platz 0.18
→ 00043 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.15
→ 00044 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.15
→ 00072 /u/zfs/platz 0.15
→ 00070 /u/zfs/platz 0.14
→ 00036 /u/zfs/platz 0.12
→ 00064 /u/zfs/platz 0.12
→ 00022 /Z18/usr/lpp/java/J1.4/lib/grap 0.11
→ 00005 /dev/ptyp0001 0.11
→ 00026 /Z18/usr/lpp/java/J1.4/lib/char 0.10

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	ReqId, FileId	Display context help information.
++	ReqId, FileId	Show additional details.
+	ReqId	Expand to reveal next level.
-	ReqId	Collapse to hide next level.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by FileId.
SP	ReqId	Sort next level by Path Name.

### on headings

Cmd	When Applied To Heading	Action
?	ReqId, Request>PathName, Percent of Time	Display context help information.
+	ReqId	Expand to reveal all entries.
+	Request>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
-	ReqId	Collapse to show only first level.
-	Request>Path Name	Reduce field size.

Cmd	When Applied To Heading	Action
-	Percent of Time	Zoom out scale.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by ReqId.
SR	ReqId	Sort next level by Request.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a ReqId will cause this detail window to appear.

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00001  read                               86.02      |
+-----+

Calculation Details
HFS request measurements          8.602
Total measurements                10,000
Percent of total                  86.02%
+-----+

```

## SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00
```

This is the minimum percentage of HFS activity measured for which an item is to be included in the report.

By default, all HFS requests captured during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to requests with activity above the specified threshold.

---

## H11- HFS Wait Time by Request

### Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS request, listed by Request name, for which wait time was observed. If a wait was observed during a sample, where there was an inflight HFS request, but could not be attributed to a specific file, the wait is aggregated to a single report line with a request name of "unknown". You can further expand each line item to show the HFS files associated with the request.

### Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS request was in a wait, to the total number of samples.

## Detail line hierarchy

An unexpanded report shows a line for each HFS request. The name field shows a sequence number assigned to each unique request type. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

Level 1 HFS Request  
Level 2 HFS File

## Detail line descriptions

### HFS Request detail line

This is the first-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each request type.
Request>Path Name	The HFS request name.
Percent of Time	The percentage wait time measured for the indicated HFS request.

### HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each HFS file.
Request>Path Name	The HFS file path name.
Percent of Time	The percentage wait time measured for the indicated HFS file.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
H11: HFS Wait Time by Request (8242/JVMTST01) Row 00001 of 00052
Command ==> _____ Scroll ==> CSR

ReqId Request>PathName Percent of Time * 10.00% ±1.0%
*.....1.....2.....3.....4.....5.....6..
00001 read 35.38
→ 00002 /dev/tty0001 70.29
→ 00001 /dev/tty0000 50.46
→ 00021 /Z18/usr/lpp/java/J1.4/lib/core 0.94
→ 00080 /Z18/usr/lpp/java/J1.4/lib/core 0.62
→ 00041 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.31
→ 00062 /u/zfs/ifile.txt 0.24
→ 00032 /Z18/usr/lpp/java/J1.4/lib/ibmo 0.18
→ 00044 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.14
→ 00026 /Z18/usr/lpp/java/J1.4/lib/char 0.09
→ 00042 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.09
→ 00034 /Z18/usr/lpp/java/J1.4/lib/ibmp 0.08
→ 00072 /u/zfs/platz 0.08
→ 00075 /u/zfs/platz 0.08
→ 00029 /Z18/usr/lpp/java/J1.4/lib/ibmj 0.07
→ 00036 /u/zfs/platz 0.07
→ 00054 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.07
→ 00081 /Z18/usr/lpp/java/J1.4/lib/grap 0.07
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	ReqId, FileId	Display context help information.
++	ReqId, FileId	Show additional details.
+	ReqId	Expand to reveal next level.
-	ReqId	Collapse to hide next level.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by FileId.
SP	ReqId	Sort next level by Path Name.

### on headings

Cmd	When Applied To Heading	Action
?	ReqId, Request>PathName, Percent of Time	Display context help information.
+	ReqId	Expand to reveal all entries.
+	Request>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
-	ReqId	Collapse to show only first level.
-	Request>Path Name	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by ReqId.
SR	ReqId	Sort next level by Request.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a ReqId will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00001  read                               85.38      |
+-----+
Calculation Details
HFS request wait time measurements      8.538
Total measurements                       10,000
Percent of total                          85.38%
```

## SETUP options

The SETUP command displays the following options:

Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS wait time measured for which an item is to be included in the report.

By default, all HFS requests captured during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to requests with wait time above the specified threshold.



---

## Chapter 9. WebSphere performance analysis reports

This section describes the WebSphere (WAS) performance analysis reports.

For information about...	See...
The WAS data extractor	"Overview of WAS data extractor" on page 530
Measuring WAS servant address space activity	"Measuring WAS servant address space activity" on page 530
B01 WAS Summary	"B01 - WAS Summary" on page 531
B02 WAS Activity	"B02 - WAS Activity" on page 534
B03 WAS Activity by Origin	"B03 - WAS Activity by Origin" on page 538
B04 WAS Activity by Servant	"B04 - WAS Activity by Servant" on page 543
B05 WAS EJB Activity	"B05 - WAS EJB Activity" on page 547
B06 WAS EJB Activity by Origin	"B06 - WAS EJB Activity by Origin" on page 550
B07 WAS EJB Activity by Servant	"B07 - WAS EJB Activity by Servant" on page 553
B08 WAS Servlet/JSP Activity	"B08 - WAS Servlet/JSP Activity" on page 557
B09 WAS Servlet/JSP by Origin	"B09 - WAS Servlet/JSP by Origin" on page 560
B10 WAS Servlet/JSP by Servant	"B10 WAS Servlet/JSP by Servant" on page 563
B11 WAS/CICS Calls	"B11 - WAS/CICS Calls" on page 566
B12 WAS/DB2 Calls	"B12 - WAS/DB2 Calls" on page 569
B13 Async Work Requests	"B13 - Async Work Requests" on page 573
B14 Async Work by Work Mgr	"B14 - Async Work by Work Mgr" on page 575
B15 Async Work by Servant	"B15 - Async Work by Servant" on page 578
B16 WOLA Inbound Requests	"B16 - WOLA Inbound Requests" on page 581
B17 WOLA Inbound by Origin	"B17 - WOLA Inbound by Origin" on page 584
B18 WOLA Inbound by Servant	"B18 - WOLA Inbound by Servant" on page 588
B19 WOLA Outbound Requests	"B19 - WOLA Outbound Requests" on page 592
B20 WOLA Outbound by Register	"B20 - WOLA Outbound by Register" on page 594
B21 WOLA Outbound by Servant	"B21 - WOLA Outbound by Servant" on page 597

---

## Overview of WAS data extractor

To use the WebSphere Performance Analysis Reports, WAS must be enabled in Application Performance Analyzer by your installation, and the WAS data extractor must be turned on when the Observation Request is entered. You select the WAS data extractor in the Options panel when creating a new measurement. The WAS data extractor is valid only if the target job is an active WAS controller address space. The WAS controller is not actually sampled, since no application code runs in a WAS controller. Instead, all WAS requests processed by the target WAS controller are recorded in the sample file. The sampling frequency will be changed to 1 per second and the number of samples will be changed to the sampling duration in seconds when the WAS measurement request begins.

When the WAS data extractor is selected, SMF records are activated for the target WAS controller address space. The SMF records contain information about each WAS request processed by the server. This SMF data is extracted and written to the sample file.

### Sequence Numbers

The sequence numbers assigned to unique occurrences of object names (EJBs, servlets, and so on) do not necessarily indicate the order in which the objects were invoked.

### CPU and Service Times

CPU time (including zIIP and zAAP time) is measured in microseconds. zIIP and zAAP CPU times are normalized to CP time. Service time (elapsed time) is measured in milliseconds. Total service time can exceed the sampling duration, because WAS processes multiple requests in parallel.

### CPU Usage Breakdown

The SMF records contain information at the request level, giving total CPU and service times for each request. If the request invokes the Web container or EJB container, the SMF records contain information for each servlet/JSP or method invoked, to a maximum of 30 unique occurrences. Included in this information is CPU time, service time, and the number of times the object was invoked.

The sum of CPU times and service times for the breakdown will not add up to the CPU time and service time for the request, since not all activity is recorded in the breakdown when processing a request.

Similarly, the invocation count for a servlet/JSP or method will not add up to the request count at the request level.

### Request Types

The type of a request is determined by its SMF record. Only a single type is recorded for each request. For example, if a request arrives via HTTP for a managed bean, the request type is HTTP. It will be counted once as an HTTP request. It will not be counted as an Mbean request.

---

## Measuring WAS servant address space activity

If during measurement of the controller, one or more WebSphere Application Services servant address spaces become active, they will also be automatically measured in separate child observation sessions. The servant observation sessions use a sampling frequency based on the number of samples and duration entered for the WAS request, and end when the controller measurement ends. You may



select any of the following extractors when WAS is selected: CICS, DB2, DB2+, CDB2, DB2V, and JAVA. However, these extractors are only enabled for the servant observation sessions. Upon completion of the measurement, all servant observations will include a copy of the controller's B01 to B10 reports for your convenience.

**Note:** Measurement of servant region activity requires the Application Performance Analyzer WLM intercept be enabled during installation. Contact your system programmer to verify that the WLM intercept is enabled in Application Performance Analyzer.

---

## B01 - WAS Summary

### Usage

Use this report to see a summary of the WAS requests that were observed for the duration of the measurement.

### Detail Line descriptions

#### System Identification

This section identifies the z/OS system on which the measurement was done.

#### System name

The system name taken from the CVTSNAME field of the MVS CVT control block.

#### Sysplex

The sysplex name taken from the ECVTSPLX field of the MVS ECVT control block.

#### Job name

The job name of the WAS controller address space.

**Job id** The job identifier of the WAS controller address space.

**ASID** The address space identifier of the WAS controller address space, displayed in hex.

#### WAS Identification

This section identifies the WAS server on which the measurement was done.

**Cell** The cell short name of the WAS server.

**Node** The node name of the WAS server.

#### Cluster

The cluster name of the WAS server.

**Server** The server name of the WAS server.

#### WAS version

The version number of the WAS server.

#### Service level

The build level of the WAS server.

#### Request Counts

This section provides counts of the number of requests observed for each request type. Requests are counted once only for a single type.

**Total requests**

The total number of requests observed. This is the sum of all request counts below except for timed out requests.

**IIOOP requests**

The number of Internet Inter-ORB Protocol requests observed.

**HTTP requests**

The number of Hypertext Transfer Protocol requests observed.

**HTTPS requests**

The number of Hypertext Transfer Protocol Secure requests observed.

**MDB Plan A requests**

The number of Message Driven Bean Plan A requests observed. A plan "A" request is an MDB request from a listener port that is listening in the controller.

**MDB Plan B requests**

The number of Message Driven Bean Plan B requests observed. A plan "B" request is an MDB request from a listener port that is listening in the servant.

**MDB Plan C requests**

The number of Message Driven Bean Plan C requests observed. A plan "C" request is an MDB request from an activation specification that is listening in the adjunct.

**SIP requests**

The number of Session Initiation Protocol requests observed.

**SIPS requests**

The number of Session Initiation Protocol Secure requests observed.

**MBean requests**

The number of Managed Bean requests observed.

**OTS requests**

The number of Object Transaction Service requests observed.

**Internal requests**

The number of internal requests observed.

**Inbound WOLA requests**

The number of inbound WOLA requests observed.

**Unknown requests**

The number of unknown requests observed.

**Asynchronous requests**

The number of asynchronous requests observed.

**Timed out requests**

The number of requests that timed out and were not processed by a servant region. This count is not included in the total at the top, since the requests are already included in one of the other request counts.

**Outbound WOLA**

The number of outbound WOLA requests sent. The count is not included in the total at the top because these are requests to another system.

**Outbound unknown**

The number of outbound requests sent of an unknown type. This count is not included in the total at the top because these are requests to another system.

**Service Time**

This section shows the service time (elapsed time) for all of the requests observed. Note that the total service time can exceed the sampling duration, because WAS processes multiple requests in parallel.

**Total service time**

The total service time, measured from the time that the request was received to the time that the controller finished processing the request response.

**WLM queued time**

The total time that the requests spent on the Workload Manager queue.

**Dispatched time**

The total time that the requests spent being processed by the servant region.

**Controller time**

The total time that the requests spent being processed by the controller region.

**Asynchronous time**

The total time that is spent processing asynchronous requests. The time is not included in the total service time because these requests are independently dispatched and can run in parallel.

**CPU Usage**

This section shows the CPU time recorded for all of the requests observed.

**Enclave CPU time**

The total CPU time consumed by each observed request, as reported by the enclave when it was deleted. This includes normalized zIIP and zAAP time.

**Encl zIIP CPU time**

The total zIIP CPU time consumed by each observed request, as reported by the enclave when it was deleted. This time is normalized.

**Encl zAAP CPU time**

The total zAAP CPU time consumed by each observed request, as reported by the enclave when it was deleted. This time is normalized.

**Encl CPU s/units**

The total CPU service units for each observed request, as reported by the enclave when it was deleted.

**Encl zIIP s/units**

The total zIIP service units for each observed request, as reported by the enclave when it was deleted.

**Encl zAAP s/units**

The total zAAP service units for each observed request, as reported by the enclave when it was deleted.

**Async Encl CPU time**

The total CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This includes normalized zIIP and zAAP time.

### Async Encl zIIP CPU

The total zIIP CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This time is normalized.

### Async Encl zAAP CPU

The total zAAP CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This time is normalized.

## Sample reports

A sample report is shown here.

```
File View Navigate Help
-----
B01: WAS Summary (0144/AZSR00A)                               Row 00001 of 00024
Command ==>>>                                               Scroll ==>> CSR

System Identification           WAS Identification
System name: X235              Cell: AZBASEA
Sysplex: ADCDPL               Node: AZNODEA
Job name: AZSR00A             Cluster: AZSR00
Job id: STC08056              Server: AZSR00A
ASID: 007A                    WAS version: 7.0.0.12
                               Service level: cf121027

Request Counts                 Service Time
Total requests: 218           Total service time: 00:03:27.005
IIOP requests: 0             WLM queued time: 00:00:00.176
HTTP requests: 218          Dispatched time: 00:00:02.732
HTTPS requests: 0           Controller time: 00:03:24.095
MDB Plan A requests: 0      Asynchronous time: 00:00:00.000
MDB Plan B requests: 0
MDB Plan C requests: 0
SIP requests: 0             CPU Usage
SIPS requests: 0           Enclave CPU time: 00:00:10.327
MBean requests: 0          Encl zIIP CPU time: 00:00:09.341
OTS requests: 0            Encl zAAP CPU time: 00:00:00.000
Internal requests: 0       Encl CPU s/units: 24940
Inbound WOLA requests: 0   Encl zIIP s/units: 22552
Unknown requests: 0        Encl zAAP s/units: 0
Asynchronous requests: 0   Async Encl CPU time: 00:00:00.000
Timed out requests: 0      Async Encl zIIP CPU: 00:00:00.000
Outbound WOLA: 0           Async Encl zAAP CPU: 00:00:00.000
Outbound unknown: 0
```

## B02 - WAS Activity

### Usage

This report shows quantification by the classification name of the request. You can expand each request line to see a breakdown and quantification by object (EJB or Web application) and method or servlet/JSP within the object.

### Quantification

Each report line shows the following for each WAS request and, when expanded, the object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.
- Total service time for the request or invocation.

- Mean service time for the request or invocation.

## Detail Line hierarchy

An unexpanded report shows a line for each unique WAS request. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

- Level 1 WAS request
  - Level 2 EJB or Web application
    - Level 3 Method or servlet/JSP
  - Level 2 EJB or Web application
    - Level 3 Method or servlet/JSP

## Detail Line descriptions

### WAS Request detail line

This is the first level detail line. Each line shows information about a WAS request for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests counted for this request name. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this request name. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name.
Svc Time: Mean	The mean service time per request.

### Object detail line

This is the second level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.

<b>Under Heading</b>	<b>This is Displayed</b>
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 2 CPU times do not necessarily add up to the level 1 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 2 CPU times do not necessarily add up to the level 1 CPU times.
Svc Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 2 service times do not necessarily add up to the level 1 service times.
Svc Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 2 service times do not necessarily add up to the level 1 service times.

### **Invocation detail line**

This is the third level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP within the object.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A level 4 sequence number within the level 3 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

## Sample reports

A sample report is shown here with the first level 1 line fully expanded.

```

B02: WAS Activity (0144/AZSR00A)                                Row 00001 of 00038
Command ==>                                                    Scroll ==> CSR
Request,EJB/Webapp      Request  --CPU Time--      --Svc Time--
Seqno Method/Servlet Name Count    Total    Mean    Total    Mean
00001 /PlantsByWebSphere/servlet/ShoppingServlet      40    6.30    0.15765    1.30    0.03269
> 00002 PlantsByWebSphere#PlantsByWebSphere.war      80    4.53    0.05665    0.81    0.01023
> 00003 ShoppingServlet      40    4.26    0.10668    0.78    0.01955
> 00002 /shopping.jsp      17    0.04    0.00270    0.01    0.00070
> 00006 /product.jsp      11    0.03    0.00300    0.00    0.00036
> 00010 /cart.jsp      11    0.17    0.01618    0.02    0.00181
> 00014 /login.jsp      1    0.00    0.00812    0.00    0.00100
> 00003 PlantsByWebSphere::PlantsByWebSphereEJB.jar::ShoppingCart      64    0.11    0.00181    0.01    0.00015
> 00008 getItem:      29    0.01    0.00047    0.00    0.00006
> 00009 getTotalCost:      11    0.00    0.00050    0.00    0.00000
> 00011 addItem:com.ibm.websphere.samples.plantsbywebsphereejb.ShoppingCartItem      11    0.00    0.00055    0.00    0.00018
> 00013 getCartContents:      11    0.00    0.00051    0.00    0.00000
> 00012 create:      2    0.08    0.04259    0.00    0.00300
> 00001 PlantsByWebSphere::PlantsByWebSphereEJB.jar::Catalog      39    1.36    0.03498    0.11    0.00284
> 00007 getItemInventory:java.lang.String      22    0.30    0.01388    0.02    0.00104
> 00001 getItemByCategory:int      17    1.05    0.06228    0.08    0.00517
00002 /PlantsByWebSphere/servlet/ImageServlet      174    3.96    0.02276    205.62    1.18173

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B03 - WAS Activity by Origin

### Usage

This report shows quantification by the origin of the request. You can expand each origin line to see a breakdown and quantification by request, object (EJB or Web application) and method or servlet/JSP within the object.

### Quantification

Each report line shows the following for each request origin and, when expanded, the request lines and object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.
- Total service time for the request or invocation.
- Mean service time for the request or invocation.



## Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

- Level 1 WAS request origin
  - Level 2 WAS request
    - Level 3 EJB or Web application
      - Level 4 Method or servlet/JSP
    - Level 2 WAS request
      - Level 3 EJB or Web application
        - Level 4 Method or servlet/JSP

## Detail Line descriptions

### WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.
Count	The number of requests counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this origin.
Svc Time: Mean	The mean service time for this origin.

### WAS Request detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies the WAS requests that came from the origin above.

Under Heading	This is Displayed
Seqno	A unique level 2 sequence number within the level 1 line.
Name	The request name.
Count	The number of requests counted for this request name that came from the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all requests counted for this request name that came from the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this request. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name that came from the origin above.
Svc Time: Mean	The mean service time for this request.

### Object detail line

This is the third level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB or Web application name.
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 3 counts do not necessarily add up to the level 2 count.
CPU Time: Total	The total CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
Svc Time: Total	The total service time (elapsed time) for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.

### Invocation detail line

This is the fourth level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP.

## Sample reports

A sample report is shown here with the first level 1 line partially expanded.

```

B03: WAS Activity by Origin (0144/AZSR00A)                               Row 00012 of 00038
Command ==>                                                            Scroll ==> CSR

      Origin,Req,EJB/Web      Request  --CPU Time--      --Svc Time--
Seqno Method/Servlet Name      Count   Total    Mean      Total    Mean
00001 ip addr=99.247.184.65    100    6.39    0.06395  104.24   1.04240
> 00002 /PlantsByWebSphere/serv  78    1.83    0.02346  103.34   1.32494
  let/ImageServlet
> 00001 /PlantsByWebSphere/serv  22    4.56    0.20750   0.89    0.04070
  let/ShoppingServlet
> 00002 PlantsByWebSphere#Pla  44    3.57    0.08130   0.62    0.01418
  ntsByWebSphere.war
> 00003 ShoppingServlet        22    3.40    0.15490   0.59    0.02722
> 00002 /shopping.jsp           8     0.02    0.00279   0.00    0.00087
> 00006 /product.jsp            7     0.02    0.00296   0.00    0.00028
> 00010 /cart.jsp                7     0.12    0.01802   0.01    0.00228
> 00003 PlantsByWebSphere::Pl  41    0.10    0.00251   0.00    0.00021
  antsByWebSphereEJB.ja
  r::ShoppingCart
> 00008 getItem:                19    0.00    0.00049   0.00    0.00005
> 00009 getTotalCost:           7     0.00    0.00058   0.00    0.00000
> 00011 addItem:com.ibm.web    7     0.00    0.00063   0.00    0.00028
  sphere.samples.plan
  tsbywebsphereejb.Sh
  oppingCartItem
> 00013 getCartContents:        7     0.00    0.00059   0.00    0.00000
> 00012 create:                  1     0.08    0.08112   0.00    0.00600
> 00001 PlantsByWebSphere::Pl  22    0.71    0.03251   0.05    0.00268
  antsByWebSphereEJB.ja
  r::Catalog
> 00007 getItemInventory:java  14    0.20    0.01477   0.01    0.00107
  va.lang.String
> 00001 getItemByCategory:      8     0.50    0.06354   0.04    0.00550
  int
00002 ip addr=70.30.134.79    118    3.93    0.03332  102.76   0.87088
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B04 - WAS Activity by Servant

### Usage

This report shows quantification by servant in which the request ran. You can expand each servant line to see a breakdown and quantification by request, object (EJB or Web application) and method or servlet/JSP within the object.

### Quantification

Each report line shows the following for each servant region and, when expanded, the request lines and object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.
- Total service time for the request or invocation.
- Mean service time for the request or invocation.

### Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1  WAS servant region
  Level 2  WAS request
    Level 3  EJB or Web application
      Level 4  Method or servlet/JSP
  Level 2  WAS request
    Level 3  EJB or Web application
      Level 4  Method or servlet/JSP
```

### Detail Line descriptions

#### WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant region for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of requests counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix. Note: An Affinity Count is displayed in the detail window for this line. This is a count of the number of requests queued to this specific servant region because the requests had an affinity to the servant, possibly because of HTTP session affinity.
CPU Time: Total	The total CPU time for all requests counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this servant.
Svc Time: Mean	The mean service time for this servant.

### WAS Request detail line

This is the second level detail line shown directly under the servant detail line. It quantifies the WAS requests that came from the servant above.

Under Heading	This is Displayed
Seqno	A unique level 2 sequence number within the level 1 line.
Name	The request name.
Count	The number of requests counted for this request name that ran in the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this request name that ran in the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this request. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name that ran in the servant above.
Svc Time: Mean	The mean service time for this request.

### Object detail line

This is the third level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB or Web application name.
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 3 counts do not necessarily add up to the level 2 count.
CPU Time: Total	The total CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
Svc Time: Total	The total service time (elapsed time) for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.
Svc Time: Mean	The mean service time for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.

### Invocation detail line

This is the fourth level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP.

## Sample reports

A sample report is shown here with the first level 1 line partially expanded.

```

B04: WAS Activity by Servant (0144/AZSR00A)                               Row 00012 of 00038
Command ==>                                                            Scroll ==> CSR

```

Seqno	Servant,Req,EJB/Web Method/Servlet Name	Request Count	--CPU Time-- Total Mean		--Svc Time-- Total Mean	
00001	AZSR00AS STC08061	100	6.39	0.06395	104.24	1.04240
> 00002	/PlantsByWebSphere/servlet/ImageServlet	78	1.83	0.02346	103.34	1.32494
> 00001	/PlantsByWebSphere/servlet/ShoppingServlet	22	4.56	0.20750	0.89	0.04070
> 00002	PlantsByWebSphere#PlantsByWebSphere.war	44	3.57	0.08130	0.62	0.01418
> 00003	ShoppingServlet	22	3.40	0.15490	0.59	0.02722
> 00002	/shopping.jsp	8	0.02	0.00279	0.00	0.00087
> 00006	/product.jsp	7	0.02	0.00296	0.00	0.00028
> 00010	/cart.jsp	7	0.12	0.01802	0.01	0.00228
> 00003	PlantsByWebSphere:EJB.jar::ShoppingCart	41	0.10	0.00251	0.00	0.00021
> 00008	getItems:	19	0.00	0.00049	0.00	0.00005
> 00009	getTotalCost:	7	0.00	0.00058	0.00	0.00000
> 00011	addItem:com.ibm.websphere.samples.plantsbywebsphereejb.ShoppingCartItem	7	0.00	0.00063	0.00	0.00028
> 00013	getCartContents:	7	0.00	0.00059	0.00	0.00000
> 00012	create:	1	0.08	0.08112	0.00	0.00600
> 00001	PlantsByWebSphere:EJB.jar::Catalog	22	0.71	0.03251	0.05	0.00268
> 00007	getItemInventory:java.lang.String	14	0.20	0.01477	0.01	0.00107
> 00001	getItemByCategory:int	8	0.50	0.06354	0.04	0.00550
00002	AZSR00AS STC08062	118	3.93	0.03332	102.76	0.87088

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).



## On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B05 - WAS EJB Activity

### Usage

This report shows quantification by EJB name, for those requests that invoked an EJB. You can expand each EJB line to see a breakdown and quantification by method within the EJB.

### Quantification

Each report line shows the following for each EJB object and, when expanded, the methods invoked for the object.

- Count of the number of requests or invocations of the EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

## Detail Line hierarchy

An unexpanded report shows a line for each unique EJB. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 EJB  
    Level 2 Method

## Detail Line descriptions

### EJB detail line

This is the first level detail line. Each line shows information about an EJB for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The EJB name.
Count	The number of invocations counted for this EJB. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this EJB. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per EJB. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB.
Svc Time: Mean	The mean service time per EJB.

### Method detail line

This is the second level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB method name.
Count	The number of invocations counted for this method. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time for all invocations of this method.

## Sample reports

A sample report is shown here with the level 1 lines fully expanded.

B05: WAS EJB Activity (0144/AZSR00A)					Row 00001 of 00019	
Command ==>					Scroll ==> CSR	
Seqno	Request,EJB/Webapp Method/Servlet Name	Request Count	--CPU Time-- Total Mean		--Svc Time-- Total Mean	
00001	PlantsByWebSphere::PlantsByWebSphereEJB.jar::Catalog	213	3.16	0.01487	0.27	0.00128
> 00005	getItemImageBytes:java.lang.String	174	1.80	0.01036	0.16	0.00093
> 00001	getItemByCategory:int	17	1.05	0.06228	0.08	0.00517
> 00007	getItemInventory:java.lang.String	22	0.30	0.01388	0.02	0.00104
00003	PlantsByWebSphere::PlantsByWebSphereEJB.jar::ShoppingCart	64	0.11	0.00181	0.01	0.00015
> 00012	create:	2	0.08	0.04259	0.00	0.00300
> 00008	getItem:	29	0.01	0.00047	0.00	0.00006
> 00011	addItem:com.ibm.websphere.samples.plantsbywebphereejb.ShoppingCartItem	11	0.00	0.00055	0.00	0.00018
> 00013	getCartContents:	11	0.00	0.00051	0.00	0.00000
> 00009	getTotalCost:	11	0.00	0.00050	0.00	0.00000

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B06 - WAS EJB Activity by Origin

### Usage

This report shows quantification of EJB invocations by the origin of requests that invoked the EJB. You can expand each origin line to see a breakdown and quantification by EJB and method within the EJB.

### Quantification

Each report line shows the following for each request origin and, when expanded, the EJB and method lines for the origin.

- Count of the number of requests or invocations of an EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

### Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1  WAS request origin
         Level 2  EJB
           Level 3  Method
         Level 2  EJB
           Level 3  Method
```

### Detail Line descriptions

#### WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.
Count	The number of EJB invocations counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all EJB invocations counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all EJB invocations counted for this origin.
Svc Time: Mean	The mean service time for this origin.

### EJB detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies invocation of an EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB name.
Count	The number of invocations counted for this EJB within the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this EJB within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this EJB within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB within the origin above.
Svc Time: Mean	The mean service time for all invocations of this EJB within the origin above.

### Method detail line

This is the third level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name.
Count	The number of invocations counted for this method within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method within its context.
Svc Time: Mean	The mean service time for all invocations of this method within its context.

## Sample reports

A sample report is shown here with the first level 1 line fully expanded.

```

B06: WAS EJB Activity by Origin (0144/AZSR00A)                               Row 00001 of 00022
Command ==>>>                                                            Scroll ==>> CSR
      Origin,EJB,          Request  --CPU Time--      --Svc Time--
      Seqno Method Name      Count    Total    Mean    Total    Mean
00001 ip addr=99.247.184.65      141    1.65    0.01175    0.14    0.00102
> 00001 PlantsByWebSphere::Plan  100    1.55    0.01554    0.13    0.00136
   tsByWebSphereEJB.jar::C
   atalog
> 00005 getItemImageBytes:jav    78     0.83    0.01075    0.07    0.00098
   a.lang.String
> 00007 getItemInventory:java    14     0.20    0.01477    0.01    0.00107
   .lang.String
> 00001 getItemByCategory:in     8      0.50    0.06354    0.04    0.00550
   t
> 00003 PlantsByWebSphere::Plan  41     0.10    0.00251    0.00    0.00021
   tsByWebSphereEJB.jar::S
   hoppingCart
> 00008 getItem:                19     0.00    0.00049    0.00    0.00005
> 00009 getTotalCost:           7      0.00    0.00058    0.00    0.00000
> 00011 addItem:com.ibm.websp    7      0.00    0.00063    0.00    0.00028
   here.samples.plantsby
   websphereejb.Shopping
   CartItem
> 00013 getCartContents:         7      0.00    0.00059    0.00    0.00000
> 00012 create:                 1      0.08    0.08112    0.00    0.00600
00002 ip addr=70.30.134.79      136    1.62    0.01196    0.13    0.00102

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B07 - WAS EJB Activity by Servant

### Usage

This report shows quantification of EJB invocations by the servant region in which the EJB was invoked. You can expand each servant line to see a breakdown and quantification by EJB and method within the EJB.

### Quantification

Each report line shows the following for each servant region and, when expanded, the EJB and method lines for the servant.

- Count of the number of requests or invocations of an EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

## Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS servant region  
  Level 2 EJB  
    Level 3 Method  
  Level 2 EJB  
    Level 3 Method

## Detail Line descriptions

### WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of EJB invocations counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all EJB invocations counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all EJB invocations counted for this servant.
Svc Time: Mean	The mean service time for this servant.

### EJB detail line

This is the second level detail line shown directly under the servant detail line. It quantifies invocation of an EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB name.
Count	The number of invocations counted for this EJB within the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.



<b>Under Heading</b>	<b>This is Displayed</b>
CPU Time: Total	The total CPU time for all invocations of this EJB within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this EJB within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB within the servant above.
Svc Time: Mean	The mean service time for all invocations of this EJB within the servant above.

### **Method detail line**

This is the third level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name.
Count	The number of invocations counted for this method within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method within its context.
Svc Time: Mean	The mean service time for all invocations of this method within its context.

## Sample reports

A sample report is shown here with the first level 1 line fully expanded.

B07: WAS EJB Activity by Origin (0144/AZSR00A)				Row 00001 of 00022		
Command ==>				Scroll ==> CSR		
Seqno	Servant,EJB Method Name	Request Count	--CPU Time-- Total Mean	--Svc Time-- Total Mean		
00001	AZSR00AS STC08061	141	1.65 0.01175	0.14	0.00102	
> 00001	PlantsByWebSphere::Plan tsByWebSphereEJB.jar::C atalog	100	1.55 0.01554	0.13	0.00136	
> 00005	getItemImageBytes:jav a.lang.String	78	0.83 0.01075	0.07	0.00098	
> 00007	getItemInventory:java .lang.String	14	0.20 0.01477	0.01	0.00107	
> 00001	getItemsByCategory:in t	8	0.50 0.06354	0.04	0.00550	
> 00003	PlantsByWebSphere::Plan tsByWebSphereEJB.jar::S hoppingCart	41	0.10 0.00251	0.00	0.00021	
> 00008	getItems:	19	0.00 0.00049	0.00	0.00005	
> 00009	getTotalCost:	7	0.00 0.00058	0.00	0.00000	
> 00011	addItem:com.ibm.websp here.samples.plantsby websphereejb.Shopping CartItem	7	0.00 0.00063	0.00	0.00028	
> 00013	getCartContents:	7	0.00 0.00059	0.00	0.00000	
> 00012	create:	1	0.08 0.08112	0.00	0.00600	
00002	AZSR00AS STC08062	136	1.62 0.01196	0.13	0.00102	

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B08 – WAS Servlet/JSP Activity

### Usage

This report shows quantification by Web application name for those requests that invoked a servlet or JSP. You can expand each Web application line to see a breakdown and quantification by servlet or JSP name within the Web application.

### Quantification

Each report line shows the following for each Web application and, when expanded, the servlet/JSP invoked within the application.

- Count of the number of requests or invocations of the Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP.

### Detail Line hierarchy

An unexpanded report shows a line for each unique Web application. You can expand each line to reveal an additional level of detail.

Level 1 Web application  
Level 2 Servlet/JSP

### Detail Line descriptions

#### Web application detail line

This is the first level detail line. Each line shows information about a Web application for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The Web application name.

<b>Under Heading</b>	<b>This is Displayed</b>
Count	The number of invocations counted for this Web application. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per Web application. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application.
Svc Time: Mean	The mean service time per Web application.

### **Servlet/JSP detail line**

This is the second level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A level 2 sequence number within the level 1 line.
Name	The servlet/JSP name.
Count	The number of invocations counted for this servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP.
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP.

## Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B08: WAS Servlet/JSP Activity (0144/AZSR00A)                               Row 00001 of 00008
Command ==>                                                                Scroll ==> CSR

      Web App,
Seqno Servlet/JSP Name          Request  --CPU Time--      --Svc Time--
                               Count    Total    Mean            Total    Mean
00002 PlantsByWebSphere#PlantsB  254    5.92    0.02333        1.93    0.00761
> 00004 ImageServlet            174    1.39    0.00801        1.11    0.00641
> 00003 ShoppingServlet         40     4.26    0.10668        0.78    0.01955
> 00002 /shopping.jsp           17     0.04    0.00270        0.01    0.00070
> 00006 /product.jsp            11     0.03    0.00300        0.00    0.00036
> 00010 /cart.jsp                11     0.17    0.01618        0.02    0.00181
> 00014 /login.jsp               1      0.00    0.00812        0.00    0.00100
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

### On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B09 - WAS Servlet/JSP by Origin

### Usage

This report shows quantification of Web application invocations by the origin of requests that invoked the Web application. You can expand each origin line to see a breakdown and quantification by Web application and servlet/JSP within the Web application.

### Quantification

Each report line shows the following for each request origin and, when expanded, the Web application and servlet/JSP lines for the request.

- Count of the number of invocations of a Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP

### Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS request origin  
  Level 2 Web application  
    Level 3 Servlet/JSP  
  Level 2 Web application  
    Level 3 Servlet/JSP

### Detail Line descriptions

#### WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.
Count	The number of Web application invocations counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all Web application invocations counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for all Web application invocations counted for this origin.
Svc Time: Mean	The mean service time for this origin.

### Web application detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies invocation of a Web application.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The Web application name.
Count	The number of invocations counted for this Web application within the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this Web application within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application within the origin above.
Svc Time: Mean	The mean service time for all invocations of this Web application within the origin above.

### Servlet/JSP detail line

This is the third level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The servlet/JSP name.
Count	The number of invocations counted for this servlet/JSP within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP within its context.

## Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B09: WAS Servlet/JSP by Origin (0144/AZSR00A)                               Row 00001 of 00017
Command ==>>>                                                              Scroll ==>> CSR
      Origin,Web App,                Request  --CPU Time--      --Svc Time--
Seqno  Servlet/JSP Name              Count    Total    Mean    Total    Mean
00001 ip addr=99.247.184.65         122     4.21   0.03458   1.18   0.00974
> 00002 PlantsByWebSphere#Plant    122     4.21   0.03458   1.18   0.00974
   sByWebSphere.war
> 00004 ImageServlet                78      0.64   0.00823   0.56   0.00724
> 00003 ShoppingServlet             22      3.40   0.15490   0.59   0.02722
> 00002 /shopping.jsp               8       0.02   0.00279   0.00   0.00087
> 00006 /product.jsp                7       0.02   0.00296   0.00   0.00028
> 00010 /cart.jsp                   7       0.12   0.01802   0.01   0.00228
00002 ip addr=70.30.134.79         132     1.70   0.01293   0.74   0.00565
> 00002 PlantsByWebSphere#Plant    132     1.70   0.01293   0.74   0.00565
   sByWebSphere.war
> 00004 ImageServlet                96      0.75   0.00783   0.55   0.00573
> 00003 ShoppingServlet             18      0.85   0.04774   0.18   0.01016
> 00002 /shopping.jsp               9       0.02   0.00262   0.00   0.00055
> 00006 /product.jsp                4       0.01   0.00306   0.00   0.00050
> 00010 /cart.jsp                   4       0.05   0.01297   0.00   0.00100
> 00014 /login.jsp                  1       0.00   0.00812   0.00   0.00100

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.



## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B10 WAS Servlet/JSP by Servant

### Usage

This report shows quantification of Web application invocations by the servant region in which the Web application ran. You can expand each servant line to see a breakdown and quantification by Web application and servlet/JSP within the Web application.

### Quantification

Each report line shows the following for each servant region and, when expanded, the Web application and servlet/JSP lines that ran in the servant.

- Count of the number of invocations of a Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP

### Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS servant region  
  Level 2 Web application  
    Level 3 Servlet/JSP  
  Level 2 Web application  
    Level 3 Servlet/JSP

### Detail Line descriptions

#### WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of Web application invocations counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all Web application invocations counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all Web application invocations counted for this servant.
Svc Time: Mean	The mean service time for this servant.

### Web application detail line

This is the second level detail line shown directly under the servant detail line. It quantifies invocation of a Web application.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The Web application name.
Count	The number of invocations counted for this Web application within the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this Web application within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application within the servant above.
Svc Time: Mean	The mean service time for all invocations of this Web application within the servant above.

### Servlet/JSP detail line

This is the third level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The servlet/JSP name.
Count	The number of invocations counted for this servlet/JSP within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP within its context.

## Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B10: WAS Servlet/JSP by Servant (0144/AZSR00A)                               Row 00001 of 00017
Command ==>>>                                                                Scroll ==>> CSR

      Servant,Web App,      Request  --CPU Time--      --Svc Time--
Seqno Servlet /JSP Name    Count   Total    Mean    Total    Mean
00001 AZSR00AS STC08061    122    4.21    0.03458    1.18    0.00974
> 00002 PlantsByWebSphere#Plant 122    4.21    0.03458    1.18    0.00974
   sByWebSphere.war
> 00004 ImageServlet      78     0.64    0.00823    0.56    0.00724
> 00003 ShoppingServlet   22     3.40    0.15490    0.59    0.02722
> 00002 /shopping.jsp      8     0.02    0.00279    0.00    0.00087
> 00006 /product.jsp       7     0.02    0.00296    0.00    0.00028
> 00010 /cart.jsp          7     0.12    0.01802    0.01    0.00228
00002 AZSR00AS STC08062    132    1.70    0.01293    0.74    0.00565
> 00002 PlantsByWebSphere#Plant 132    1.70    0.01293    0.74    0.00565
   sByWebSphere.war
> 00004 ImageServlet      96     0.75    0.00783    0.55    0.00573
> 00003 ShoppingServlet   18     0.85    0.04774    0.18    0.01016
> 00002 /shopping.jsp      9     0.02    0.00262    0.00    0.00055
> 00006 /product.jsp       4     0.01    0.00306    0.00    0.00050
> 00010 /cart.jsp          4     0.05    0.01297    0.00    0.00100
> 00014 /login.jsp         1     0.00    0.00812    0.00    0.00100

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

## On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

## On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

---

## B11 - WAS/CICS Calls

### Usage

This report shows service times for CICS Distributed Program Link calls from the WAS servant region. You can expand each CICS region line to see a breakdown and quantification of program and start time within the CICS region.

A prerequisite for this report is activation of the WAS and CICS options during the measurement. This report is available only when you view the reports for the WebSphere Application Services servant address space measurements.

### Quantification

Each report line shows the following for each CICS region, and when expanded, the CICS program and start time for each call of the program.

- Count of the number of invocations of the CICS program
- Total service time for the CICS program
- Mean service time for the CICS program

## Detail Line Hierarchy

An unexpanded report shows a line for each CICS region. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

- Level 1 CICS Region
  - Level 2 CICS program
    - Level 3 Start time of program

## Detail Line Descriptions

### CICS region detail line

This is the first-level detail line. Each line shows the information about a CICS region for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS VTAM® application id of the region in which the request was processed.
Count	The number of CICS program invocations counted for this region. Large numbers will be expressed in thousands or millions with a K or M suffix.
Svc Time: Total	The total service time (elapsed time) for all CICS program invocations counted for this region.
Svc Time: Mean	The mean service time for this region.

### CICS program detail line

This is the second-level detail line shown directly under the CICS region detail line. It quantifies the invocation of a CICS program within the CICS region.

Under Heading	This is Displayed
Name	The CICS program name.
Count	The number of invocations counted for this CICS program within the region above. Large numbers will be expressed in thousands or millions with a K or M suffix.
Svc Time: Total	The total service time (elapsed time) for all invocations of this CICS program within the region above.
Svc Time: Mean	The mean service time for all invocations of this CICS program within the region above.

### Start time detail line

This is the third-level detail line shown directly under the CICS program detail line. It quantifies the invocation of a single program within the CICS region.

Under Heading	This is Displayed
Name	The time the program started.
Count	This will always be '1' at this level.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for the invocation of this program.
Svc Time: Mean	The mean service time for the invocation of this program. This will always be the same as the total.

## Sample reports

A sample report is shown here. The CICS region has been expanded to the third level (start time).

```

File View Navigate Help
-----
CAZTA001 CICS Calls (7760/BZSR00BS) Row 00001 of 00004
Command ==> _____ Scroll ==> CSR

--Svc Time--
Name          Count          Total          Mean
CICS42A       2              2.15          1.07763
+ BURNER      2              2.15          1.07763
-> 11:53:16   1              1.08          1.08284
-> 11:53:18   1              1.07          1.07243

```

## Line Commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a “/” on any input field to open a menu of line commands available for that field).

### On objects

Cmd	When applied to	Action
?	Name	Display context help information
+	Name	Expand to reveal next level
-	Name	Collapse to hide next level
SV	Name	Sort next level entries by value
SN	Name	Sort next level entries by name
SS	Name	Sort next level entries by service time

### On headings

Cmd	When applied to heading	Action
?	Name	Display context help information
+	Name	Expand to reveal all entries
-	Name	Collapse to show only first level
SV	Name	Sort next level by value

Cmd	When applied to heading	Action
SN	Name	Sort next level by name
SS	Name	Sort next level by service time

---

## B12 - WAS/DB2 Calls

### Usage

This report shows exact SQL call counts, SQL processing CPU times and SQL processing service times for DB2 calls initiated from WAS requests. You can expand each WAS request line to see details of the SQL calls made by each WAS request.

A prerequisite for this report is activation of the WAS and DB2+ options during the measurement. This report is available only when viewing the reports for the appropriate WebSphere Application Services servant address space measurements.

### Quantification

Each report line shows the following for each WAS request, and when expanded, the SQL calls made by the request.

- Count of the number of SQL calls from an object
- Total task CPU time for processing the SQL call
- Mean task CPU time or percent of total used
- Total service time for processing the SQL call
- Mean service time or percent of total used

A setup option is available to display the percent used in place of the mean fields.

### Detail Line Hierarchy

An unexpanded report shows a line for each WAS request. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```

Level 1  WAS request
      Level 2  SQL request
            Level 3  SQL statement text

```

### Detail Line Descriptions

#### WAS Request detail line

This is the first level detail line. Each line shows information about a WAS request for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
WAS Request	The request name.

<b>Under Heading</b>	<b>This is Displayed</b>
Nbr of SQL Calls	The number of SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total task CPU time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean task CPU time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time:Pct	The percent of total CPU time this request used.
SVC Time: Total	The total service time (elapsed time) for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time:Pct	The percent of total service time this request used.

### SQL Request detail line

This is the second-level detail line. It quantifies an individual SQL statement.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A sequence number assigned to uniquely identify the SQL statement. Either "S" or "D" precedes the sequence number, indicating whether the SQL statement is static or dynamic.
DB2 Call	The DBRM name, precompiler statement number and SQL function.  When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
Nbr of SQL Calls	The number of SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total task CPU time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.



Under Heading	This is Displayed
CPU Time: Mean	The mean task CPU time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time:Pct	The percent of total CPU time this SQL statement used.
SVC Time: Total	The total service time (elapsed time) for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time:Pct	The percent of total service time this SQL statement used.

### SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

### Sample reports

A sample report is shown here. The WAS request has been expanded to the second level.

```

File View Navigate Help
-----
B12: WAS/DB2 Calls (9043/BZSR00BS)                               Row 00001 of 00020
Command ==> _____ Scroll ==> CSR

Seqno  WAS Request/DB2 Call          Nbr of  --CPU Time--  --Svc Time--
      SQL Calls  Total    Mean         Total    Mean
00001 /WasDb2Tester/Db2TesterServ1  674  0.20  0.00030  0.22  0.00033
± D00004 SYSLH200      0  FETCH      668  0.20  0.00030  0.22  0.00033
→ D00006 SYSSTAT      0  COMMIT      2   0.00  0.00130  0.00  0.00139
→ D00002 SYSLH200      0  DESCRIBE     1   0.00  0.00013  0.00  0.00001
→ D00003 SYSLH200      0  OPEN         1   0.00  0.00017  0.00  0.00001
→ D00005 SYSLH200      0  CLOSE        1   0.00  0.00018  0.00  0.00001
→ D00007 SYSSTAT      0  ROLLBACK     1   0.00  0.00029  0.00  0.00091
00002 /WasDb2Tester/Db2EjbTesterSe  674  0.21  0.00031  0.28  0.00042
→ D00004 SYSLH200      0  FETCH      668  0.20  0.00029  0.27  0.00040
→ S00008 SYSSTAT      0  CNCT TO U     1   0.00  0.00271  0.00  0.00495
→ D00001 SYSLH200      0  PREPARE      1   0.00  0.00659  0.00  0.00079
→ D00002 SYSLH200      0  DESCRIBE     1   0.00  0.00029  0.00  0.00029
→ D00003 SYSLH200      0  OPEN         1   0.00  0.00021  0.00  0.00001
→ D00010 SYSLH200      0  CLOSE        1   0.00  0.00019  0.00  0.00001
→ D00007 SYSSTAT      0  ROLLBACK     1   0.00  0.00078  0.00  0.00553
00003 /WasDb2Tester/Db2SpTesterSer   5   0.01  0.00267  14.61  2.92395
→ D00006 SYSSTAT      0  COMMIT      2   0.00  0.00252  0.02  0.01294
→ S00008 SYSSTAT      0  CNCT TO U     1   0.00  0.00291  0.00  0.00522
→ S00009 SYSSTAT      0  CALL STAT     1   0.00  0.00523  14.58  14.58690
→ D00007 SYSSTAT      0  ROLLBACK     1   0.00  0.00017  0.00  0.00177

```

## Line Commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a "/" on any input field to popup a menu of line commands available for that field).

### On objects

Cmd	When applied to	Action
?	Seqno	Display context help information
++	Seqno	Show additional details
+	Seqno	Expand to reveal next level
-	Seqno	Collapse to hide next level
SV	Seqno	Sort next level entries by value
SC	Seqno	Sort next level entries by CPU time
SS	Seqno	Sort next level entries by service time

### On headings

Cmd	When applied to heading	Action
?	Seqno	Display context help information
++	Seqno	Show additional details
+	Seqno	Expand to reveal all entries
-	Seqno	Collapse to show only first level
SV	Seqno	Sort next level by value
SC	Seqno	Sort next level by CPU time
SS	Seqno	Sort next level by service time

## SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
+-----+
| Options for WAS/DB2 Calls |
|                             |
| Enter "/" to select an option |
|   /  Display Percent used in place of Mean fields |
|                             |
+-----+
```

### Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by the WAS request and SQL statement, rather than the mean time.

---

## B13 - Async Work Requests

### Usage

The B13 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B13 report shows quantification by the package or class name of the request. To see a breakdown and quantification by work manager within the package, expand each request line.

To use this report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each package/class. When you expand any package/class, the work manager lines for that package/class are displayed.

- Count of the number requests for a package/class or work manager
- Total CPU time for the package/class or work manager
- Mean CPU time for the package/class or work manager
- Total service time for the package/class or work manager
- Mean service time for the package/class or work manager

### Detail Line Hierarchy

A report that is not expanded shows a line for each Package/Class. To reveal an additional hierarchical level of detail, expand each line by using the + line command. The hierarchy is illustrated as follows:

```
Level 1 Package/Class
    Level 2 Work Manager
```

### Detail Line Descriptions

#### Package/Class detail line

Package/Class detail line is the first-level detail line. Each line shows information about a package/class for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.

Under Heading	This is Displayed
SVC Time: Mean	The mean service time per package/class.

## Work Manager detail line

Work Manager detail line is the second-level detail line. It shows information about the work manager used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Work Mgr	The work manager name
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B13: Async Work Requests (0993/CZSR00C)                               Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

```

Seqno	Package/Class Work Mgr	Request Count	--CPU Time--		--Svc Time--	
			Total	Mean	Total	Mean
00001	com.ibm.ws.asyncbeans.CJ WorkListenerRunnable	32	0.79	0.02471	0.02	0.00079
→ 00001	wm/bnetwm1	32	0.79	0.02471	0.02	0.00079
00002	/WasTester/AsyncServletTe ster1	10	24.73	2.47375	13.79	1.37989
→ 00001	wm/bnetwm1	10	24.73	2.47375	13.79	1.37989
00003	com.banknet.wastester.ser vlets.AsyncServletTester2 \$StartupWork	9	22.17	2.46348	12.17	1.35254
→ 00002	wm/bnetwm2	9	22.17	2.46348	12.17	1.35254

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

## on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

## on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

---

## B14 - Async Work by Work Mgr

### Usage

The B14 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B13 report shows quantification by the work manager of the request. To see a breakdown and quantification by package/class within the work manager, expand each request line.

To use this report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each work manager. When you expand each report line, the package/class lines for that work manager are displayed.

- Count of the number requests for the work manager or package/class
- Total CPU time for the work manager or package/class
- Mean CPU time for the work manager or package/class
- Total service time for the work manager or package/class
- Mean service time for the work manager or package/class

## Detail Line Hierarchy

A report that is not expanded shows a line for each Work Manager. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

**Level 1** Work Manager  
    **Level 2** Package/Class

## Detail Line Descriptions

### Work Manager detail line

Work Manager detail line is the first-level detail line. Each line shows information about a work manager for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Work Mgr	The work manager name
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

### Package/Class detail line

Package/Class detail line is the second-level detail line that is shown directly under the work manager detail line. The Package/Class detail line shows information about the package/class used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.

<b>Under Heading</b>	<b>This is Displayed</b>
SVC Time: Mean	The mean service time per package/class.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B14: Async Work by Work Mgr (0993/CZSR00C)                               Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

      Work Mgr
      Seqno Package/Class          Request  --CPU Time--      --Svc Time--
                               Count      Total    Mean           Total    Mean
00001 wm/bnetwm1                  42      25.52  0.60782      13.82  0.32915
→ 00001 com.ibm.ws.asyncbeans.    32       0.79  0.02471       0.02  0.00079
    CWorkListenerRunnable
→ 00002 /WasTester/AsyncServlet  10      24.73  2.47375      13.79  1.37989
    Tester1
00002 wm/bnetwm2                   9      22.17  2.46348      12.17  1.35254
→ 00003 com.banknet.wastester.s    9      22.17  2.46348      12.17  1.35254
    ervlets.AsyncServletTes
    ter2$StartupWork

```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

### on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

---

## B15 - Async Work by Servant

### Usage

The B15 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B15 report shows quantification by the WebSphere servant region processing the requests. To see a breakdown and quantification by package/class and work manager within the servant, expand each request line.

To use this report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each work manager. When you expand each report line, the package/class lines for that work manager are displayed.

- Count of the number requests for the servant region, package/class, or work manager
- Total CPU time for the servant region, package/class, or work manager
- Mean CPU time for the servant region, package/class, or work manager
- Total service time for the servant region, package/class, or work manager
- Mean service time for the servant region, package/class, or work manager

### Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal two additional hierarchical levels of detail, expand each line by using the **+ 1 line** command. The hierarchy is illustrated as follows:

```
Level 1 WebSphere Servant region
      Level 2 Package/Class
            Level 3 Work Manager
```

### Detail Line Descriptions

#### Servant region detail line

Servant region detail line is the first level detail line. It shows information about the servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Package/Class	The servant region name and job id.
Count	The number of requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per servant region. The CPU time includes normalized zIIP and zAAP CPU time.



Under Heading	This is Displayed
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per servant region. Large numbers are expressed in thousands or millions with a K or M suffix.

### Package/Class detail line

Package/Class detail line is the second-level detail line that is shown directly under the work manager detail line. The Package/Class detail line shows information about the package/class used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.
SVC Time: Mean	The mean service time per package/class.

### Work Manager detail line

Work Manager detail line is the third level detail line. Each line shows information about a work manager for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Work Mgr	The work manager name.
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B15: Async Work by Servant (0993/CZSR00C)                               Row 00001 of 00011
Command ==>                                                              Scroll ==> CSR
-----
  Servant,Pkg/Class      Request  --CPU Time--      --Svc Time--
  Seqno Work Mgr         Count    Total    Mean           Total    Mean
00001 CZSR00CS STC01530          51    47.69  0.93529       25.99  0.50975
-> 00001 com.ibm.ws.asyncbeans.  32     0.79  0.02471         0.02  0.00079
   CJWorkListenerRunnable
-> 00001 wm/bnetwm1           32     0.79  0.02471         0.02  0.00079
-> 00002 /WasTester/AsyncServlet  10    24.73  2.47375       13.79  1.37989
   Tester1
-> 00001 wm/bnetwm1           10    24.73  2.47375       13.79  1.37989
-> 00003 com.banknet.wastester.s   9     22.17  2.46348       12.17  1.35254
   ervlets.AsyncServletTes
   ter2$StartupWork
-> 00002 wm/bnetwm2            9     22.17  2.46348       12.17  1.35254

```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

---

## B16 - WOLA Inbound Requests

### Usage

The B16 report shows request counts, CPU times and service times for WOLA Inbound requests observed during a WebSphere measurement. The B16 report shows quantification by the request name of the inbound request. To see a breakdown and quantification by object, for example, EJB or Web application, and invocation of method or servlet/JSP within the object, expand each request line.

To use the B16 report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for WOLA Inbound request. When you expand each report line, the object invocation lines for the request are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

### Detail Line Hierarchy

A report that is not expanded shows a line for each WOLA Inbound request. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WOLA Inbound request
  Level 2 EJB or Web application
    Level 3 Method or servlet/JSP
```

### Detail Line Descriptions

#### WOLA Inbound request detail line

WOLA Inbound request detail line is the first-level detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

## Object detail line

Object detail line is the second-level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

## Invocation detail line

Invocation detail line is the third level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B16: WOLA Inbound Requests (0998/CZSR00C) Row 00001 of 00005
Command ==> _____ Scroll ==> CSR

```

Seqno	Request,EJB/Webapp, Method/Servlet Name	Request Count	--CPU Time--		--Svc Time--	
			Total	Mean	Total	Mean
00001	ejb/com/ibm/ola/olasample _1_echoHome	60	0.63	0.01054	2.86	0.04770
+ 00001	OLASample2::OLA_Sample2 .jar::olasample1_echo	60	0.09	0.00159	0.20	0.00333
→ 00001	execute:byte[]	60	0.09	0.00159	0.20	0.00333

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.

Cmd	When Applied To Heading	Action
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

## B17 - WOLA Inbound by Origin

### Usage

B17 report shows request counts, CPU times, and service times for WOLA Inbound requests observed during a WebSphere measurement. The B17 report shows quantification by the origin of the request. To see a breakdown and quantification by request, object, for example, EJB or Web application, within the request, and invocation of method or servlet/JSP within the object, expand each request line.

To use the B17 report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each request origin. When you expand each report line, the request lines and the object invocation lines for the request are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

### Detail Line Hierarchy

A report that is not expanded shows a line for each Request Origin. To reveal three additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```

Level 1 Request Origin
  Level 2 WOLA Inbound request
    Level 3 EJB or Web application
      Level 4 Method or servlet/JSP
  
```

### Detail Line Descriptions

#### Request Origin detail line

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the request came.
Count	The number of requests that are counted for this origin.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all requests that are counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this origin.
SVC Time: Mean	The mean service time for this origin.

## WOLA Inbound request detail line

WOLA Inbound request detail line is the second level detail line that is shown directly under the Request Origin detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

## Object detail line

Object detail line is the third level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.

<b>Under Heading</b>	<b>This is Displayed</b>
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

### Invocation detail line

Invocation detail line is the fourth level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.



## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B17: WOLA Inbound by Origin (0998/CZSR00C) Row 00001 of 00008
Command ===> Scroll ===> CSR
-----
  Origin,Req,EJB/Web, Request  --CPU Time--  --Svc Time--
Seqno Method/Servlet Name Count Total Mean Total Mean
-----
00001 1com::QAREX2B ::000000AC0 60 0.63 0.01054 2.86 0.04770
      0000001::002B
± 00001 ejb/com/ibm/ola/olasamp 60 0.63 0.01054 2.86 0.04770
   |   |le1_echoHome
→ 00001 OLASample2::OLA_Samp1 60 0.09 0.00159 0.20 0.00333
   |   |e2.jar::olasample1_ec
   |   |ho
→ 00001 execute:byte[] 60 0.09 0.00159 0.20 0.00333
  
```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

---

## B18 - WOLA Inbound by Servant

### Usage

B18 report shows request counts, CPU times and service times for WOLA Inbound requests observed during a WebSphere measurement. The B18 report shows quantification by the WebSphere servant region that processed the request. To see a breakdown and quantification by request, object, for example, EJB or Web application, within the request, and invocation of method or servlet/JSP within the object, expand each servant region line.

To use this report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each WebSphere servant region. When you expand each report line, the request lines and the object invocation lines for the WebSphere servant region are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

### Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal three additional hierarchical levels of detail, expand each line by using the **+line** command. The hierarchy is illustrated as follows:

**Level 1** WebSphere Servant Region  
**Level 2** WOLA Inbound request  
**Level 3** EJB or Web application  
**Level 4** Method or servlet/JSP

### Detail Line Descriptions

#### WebSphere Servant Region detail line

WebSphere Servant Region detail line is the first-level detail line. The WebSphere Servant Region detail line shows information about the servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The servant region name and job id.
Count	The number of requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this servant region. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time per servant region. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this servant region.
SVC Time: Mean	The mean service time per servant region.

### WOLA Inbound request detail line

WOLA Inbound request detail line is the second-level detail line that is shown directly under the WebSphere Servant Region detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

### Object detail line

Object detail line is the third level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.

<b>Under Heading</b>	<b>This is Displayed</b>
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

### Invocation detail line

Invocation detail line is the fourth level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

<b>Under Heading</b>	<b>This is Displayed</b>
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B18: WOLA Inbound by Servant (0998/CZSR00C) Row 00001 of 00007
Command ===> _____ Scroll ===> CSR

```

Seqno	Servant,Req,EJB/Web, Method/Servlet Name	Request Count	--CPU Time-- Total Mean		--Svc Time-- Total Mean	
00001	CZSR00CS STC01546	60	0.63	0.01054	2.86	0.04770
± 00001	ejb/com/ibm/ola/olasamp le1_echoHome	60	0.63	0.01054	2.86	0.04770
→ 00001	OLASample2::OLA_Samp1 e2.jar::olasample1_ec ho	60	0.09	0.00159	0.20	0.00333
→ 00001	execute:byte[]	60	0.09	0.00159	0.20	0.00333

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

---

## B19 - WOLA Outbound Requests

### Usage

B19 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B19 report shows quantification by the originating request. To see a breakdown and quantification by register name and service name, expand each request line

To use this report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each Outbound Request. When you expand each report line, the register names and service names for the request are displayed.

- Count of the number of requests
- Bytes sent for the request
- Bytes received for the request
- Total service time for the request
- Mean service time per request

### Detail Line Hierarchy

A report that is not expanded shows a line for each WOLA Outbound Request. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WOLA Outbound Request
  Level 2 Register
    Level 3 Service
```

### Detail Line Descriptions

#### WOLA Outbound Request detail line

WOLA Outbound Request detail line is the first-level detail line. The WOLA Outbound Request detail line shows information about the WOLA outbound requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The WOLA outbound request name.
Count	The number of requests that are counted for this request name that issued outbound requests. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for outbound requests.
Bytes Received	The total number of bytes received for this request name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

## Register detail line

Register detail line is the second-level detail line that is shown directly under the WOLA Outbound Request detail line. The register detail line quantifies the use of a particular register name for outbound requests.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The register name.
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

## Service detail line

Service detail line is the third-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The service name.
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B19: WOLA Outbound Requests (1005/CZSR00C) Row 00001 of 00004
Command ===> Scroll ===> CSR
-----
  Request,Register,      Request      ---Bytes---      --Svc Time--
  Seqno  Service         Count        Sent      Rcvd      Total      Mean
-----
00001  /ATSSample1Web/InvokeWas2      65      1495      7800      0.86      0.01325
      BatchServlet
-> 00001 EXER3B      65      1495      7800      0.86      0.01325
   -> 00001 ServiceName      65      1495      7800      0.86      0.01325
  
```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.

---

## B20 - WOLA Outbound by Register

### Usage

B20 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B20 report shows quantification by the register name of the request. To see a breakdown and quantification by service name, expand each register name.



To use this report, you must activate the WAS option during the measurement.

## Quantification

Each report line shows the following information for each register name. When you expand each report line, service names for the request are displayed.

- Count of the number of requests by register or service
- Bytes sent for the register or service
- Bytes received for the register or service
- Total service time for the register or service
- Mean service time per register or service

## Detail Line Hierarchy

A report that is not expanded shows a line for each unique register name. To reveal one additional hierarchical levels of detail, expand each line by using the **+ 1 line** command. The hierarchy is illustrated as follows:

Level 1 Register  
Level 2 Service

## Detail Line Descriptions

### Register detail line

Register detail line is the first level detail line. Each line shows information about a register for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A level 1 sequence number within the level 1 line.
Name	The register name.
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

### Service detail line

Service detail line is the second-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The service name.

Under Heading	This is Displayed
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

## Sample reports

A sample report that is fully expanded is shown as follows:

```

File View Navigate Help
-----
B20: WOLA Outbound by Register (1005/CZSR00C) Row 00001 of 00002
Command ==> _____ Scroll ==> CSR

Seqno Register,Service      Request  --CPU Time--  --Svc Time--
      Count      Total    Mean      Total    Mean
00001 EXER3B                65     1495    7800     0.86   0.01325
→ 00001 ServiceName        65     1495    7800     0.86   0.01325

```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.

---

## B21 - WOLA Outbound by Servant

### Usage

B21 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B21 report shows quantification by the WebSphere servant region in which the outbound requests were issued. To see a breakdown and quantification by register name and service name, expand each servant region line.

To use the B21 report, you must activate the WAS option during the measurement.

### Quantification

Each report line shows the following information for each WebSphere servant region that processed the request. When you expand each report line, the register names and service names for the request are displayed.

- Count of the number of outbound requests
- Bytes sent for the outbound requests
- Bytes received for the outbound requests
- Total service time for the outbound requests
- Mean service time per outbound requests

### Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WebSphere Servant
  Level 2 Register
    Level 3 Service
```

### Detail Line Descriptions

#### WebSphere Servant Region detail line

WebSphere Servant Region detail line is the first level detail line. The WebSphere Servant Region detail line shows information about the WebSphere servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The WebSphere servant region name and job id.
Count	The number of outbound requests counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for outbound requests.
Bytes Received	The total number of bytes received for this request name.

Under Heading	This is Displayed
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

### Register detail line

Register detail line is the second-level detail line that is shown directly under the WebSphere servant region detail line. The register detail line quantifies the use of a particular register name for outbound requests.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The register name.
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

### Service detail line

Service detail line is the third-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The service name.
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

## Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B21: WOLA Outbound by Servant (1005/CZSR00C) Row 00001 of 00003
Command ==> Scroll ==> CSR
-----
  Servant,Register,      Request      ----Bytes----      --Svc Time--
  Seqno Service          Count         Sent      Rcvd         Total      Mean
-----
00001 CZSR00CS STC01546          65         1495      7800         0.86  0.01325
± 00001 EXER3B          65         1495      7800         0.86  0.01325
→ 00001 ServiceName          65         1495      7800         0.86  0.01325

```

## Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

### on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

### on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.



---

## Chapter 10. Multiple address space reports

This section describes the multiple address space reports.

For information about ...	See ...
X01 CICS mean service time by transaction (for multiple CICS address spaces)	"X01 - CICS mean service time by transaction"
X02 CICS total service time by transaction (for multiple CICS address spaces)	"X02 - CICS total service time by txn" on page 609
X03 CICS mean service time by terminal ID (for multiple CICS address spaces)	"X03 - CICS mean service time by terminal ID" on page 616
X04 CICS total service time by terminal ID (for multiple CICS address spaces)	"X04 - CICS total service time by terminal ID" on page 624
X05 Combined DB2 IMS MQ Timeline	"X05 - Combined DB2 IMS MQ Timeline" on page 632

---

### X01 - CICS mean service time by transaction

#### Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multi-region activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there are samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS transaction report line to see a further breakdown by region, program, CICS command, DLI request and SQL request.

#### Quantification

Each report line quantifies time as arithmetic means for each measured transaction. The means are calculated by dividing the total of all time spent servicing all occurrences of a transaction by its number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

#### Detail line hierarchy

An unexpanded X01 report shows one line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 CICS Command
        Level 4 CICS Command
```

...

```

Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 SQL Request
Level 4 SQL Request

...
Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

...
Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

...
Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

...
Level 2 CICS Region Applid
Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services

```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, that execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction. This includes execution, suspend, and delay time.



### CICS region applid detail line

This is the second-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	The mean time, in seconds, that execution of the transaction was delayed in the region.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction in the region. This includes execution, suspend, and delay time.

### CICS program or system services detail line

This is a third-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

## SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

## DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
X01: CICS Mean Service Time by Txn (1682/CICS32A) Row 00001 of 00002
Command ==>> _____ Scroll ==>> CSR

Name  NTxns  Description          Error  Execution  + Suspend + Delay = Service
-----
RDDR      2          ±71.4%  0.359  16.333  0.809  17.502
READ     680          ± 3.8%  0.020  2.860  0.068  2.950
  
```

You can enter the + line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the third level of the hierarchy (CICS Region Applid and CICS Program) is shown here:

```

File View Navigate Help
-----
X01: CICS Mean Service Time by Txn (1682/CICS32A) Row 00001 of 00010
Command ==>> _____ Scroll ==>> CSR

Name  NTxns  Description          Error  Execution  + Suspend + Delay = Service
-----
RDDR      2          ±71.4%  0.359  16.333  0.809  17.502
→ CICS32A  Region Applid      0.119  16.333  0.749  17.202
  → READRVR  EXEC CICS          0.119  16.333  0.749  17.202

→ CICS32B  Region Applid      0.031  0.000  0.007  0.039
  → DFHMIRS  EXEC CICS          0.021  0.000  0.001  0.023
  → DFHMIRS  CICS Program       0.005  0.000  0.003  0.009
  → CICS     System Services    0.003  0.000  0.001  0.005
  
```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Region Applid, Load Module	Expand to reveal next level.
-	Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Transaction, Region Applid, Load Module	Sort next level by value.
SN	Transaction, Region Applid, Load Module	Sort next level by name.

Cmd	When Applied To Object	Action
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32A  Region Applid    0.089  17.172  0.929  18.191 |
+-----+

Calculation Details
CICS Transaction          RDDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      607
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         18.191790
(4) Number of executions of transaction         1
(5) (3) S (4) = mean time for the command      18.191790

The execution measurement counts are
Executing (CPU active)      3
Suspended by CICS          573
Delayed
  CICS dispatch delay      29
  MVS delay (WAIT)         0
  MVS delay (Busy) 2

```

---

## X02 - CICS total service time by txn

### Usage

Use this report to view an analysis of how time was spent by the CICS transactions that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multi-region activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS transaction report line to see a further breakdown by region, program, CICS command, DLI request and SQL request.

### Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

### Detail line hierarchy

An unexpanded X02 report shows one line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

...
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 SQL Request
      Level 4 SQL Request

...
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 DLI Request
      Level 4 DLI Request

...
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 Module
      Level 4 Module
      Level 4 System Services

...
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 Adabas Request
      Level 4 Adabas Request

...
  Level 2 CICS Region Applid
```

## Detail line descriptions

### CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	The total time, in seconds, that execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction. This includes execution, suspend, and delay time.

### CICS region applid detail line

This is the second-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The total time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction in the region.



Under Heading	This is Displayed
Delay	<p>The total time, in seconds, that execution of the transaction was delayed in the region.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction in the region. This includes execution, suspend, and delay time.

### CICS program or system services detail line

This is a third-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>

Under Heading	This is Displayed
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

### SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

### DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.

Under Heading	This is Displayed
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

### Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
X02: CICS Total Service Time by Txn (1684/CICS32A)          Row 00001 of 00002
Command ==> _____ Scroll ==> CSR
-----
Name  NTxns  Description          Error  Execution  + Suspend + Delay = Service
-----
READ   340
RDDR   1

```

You can enter the + line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the third level of the hierarchy (CICS Region Applid and CICS Program) is shown here:

```

File View Navigate Help
-----
X02: CICS Total Service Time by Txn (1684/CICS32A)          Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

Name  NTxns Description          Error  Execution  + Suspend + Delay = Service
-----
READ  340          ± 5.4%  7.672    1028.360  27.422  10623.455
→ CICS32B  Region Applid          3.686    970.788   3.956   978.430
  → SAMPREAD EXEC CICS              3.416    970.788   3.926   978.130
  → SAMPREAD CICS Program          0.149     0.000    0.029    0.179
  → CICS     System Services          0.119     0.000    0.000    0.119

→ CICS32A  Region Applid          3.986    57.572   23.466   85.024
  → DFHMIRS CICS Program          2.697    57.482   22.327   82.507
  → CICS     System Services          1.288     0.089    1.138    2.517

RDDR   1          ±99.9%  0.449    17.172    1.018   18.641

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Region Applid, Load Module	Expand to reveal next level.
-	Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Transaction, Region Applid, Load Module	Sort next level by value.
SN	Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.

Cmd	When Applied To Object	Action
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32B   Region Applid      3.686  970.788   3.956   978.430 |
+-----+

Calculation Details
CICS Transaction          READ
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      32647
(2) Duration of one sample interval           0.029970
(3) (1) A (2) = total time for command        978.430590

The execution measurement counts are
Executing (CPU active)          123
Suspended by CICS              32392
Delayed
  CICS dispatch delay          103
  MVS delay (WAIT)             0
  MVS delay (Busy)             29

```

## X03 - CICS mean service time by terminal ID

### Usage

Use this report to see an analysis of how time was spent on CICS terminals that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multiregion activity. Transaction data from the multiple regions is correlated using the network unit of work id to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These will be reported under the remote transaction name, such as CSMI.

Expand a CICS terminal report line to see a further breakdown by transaction, region, program, CICS command, DLI request and SQL request.

## Quantification

Each report line quantifies time as arithmetic means for all measured transactions on the terminal. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions on the terminal by the number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

## Detail line hierarchy

An unexpanded X03 report shows one line for each measured CICS terminal and 1 line for all non-terminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 CICS Command
        Level 5 CICS Command
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 SQL Request
        Level 5 SQL Request
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 DLI Request
        Level 5 DLI Request
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Module
        Level 5 Module
        Level 5 System Services
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Adabas Request
        Level 5 Adabas Request
      ...
    Level 3 CICS Region Applid
      Level 4 System Services
        Level 5 Module
        Level 5 Module
        Level 5 System Services
```

## Detail line descriptions

### CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This is the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running non-terminal attached, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This is either Terminal Txn or Non-Terminal Txn.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The mean time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The mean time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	The mean time, in seconds, that execution of transactions on this terminal was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for transactions on this terminal. This includes execution, suspend, and delay time.

### CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, that execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction. This includes execution, suspend, and delay time.



### CICS region applid detail line

This is the third-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	The mean time, in seconds, that execution of the transaction was delayed in the region.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction in the region. This includes execution, suspend, and delay time.

### CICS program or system services detail line

This is a fourth-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fifth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

## SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

## DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

### Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

### Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report that has been expanded four levels is shown below .

File View Navigate Help							
X03: CICS Mean Service Time by Term (1684/CICS32A)						Row 00001 of 00033	
Command ==>						Scroll ==> CSR	
----- Mean Time in Seconds -----							
Name	NTxns	Description	Error	Execution	+ Suspend	+ Delay	= Service
ET36	1	Terminal Attached	±99.9%	0.449	17.172	1.018	18.641
→ RDDR	1		±99.9%	0.449	17.172	1.018	18.641
→ CICS32A		Region Applid		0.089	17.172	0.929	18.191
→ READDRVR		EXEC CICS		0.089	17.172	0.929	18.191
→ +0700		START TRANSID(READ)		0.059	12.377	0.029	12.467
→ +0884		START TRANSID(READ)		0.000	0.719	0.149	0.869
→ +0B84		START TRANSID(READ)		0.000	0.749	0.059	0.809
→ +0984		START TRANSID(READ)		0.000	0.509	0.149	0.659
→ +0904		START TRANSID(READ)		0.000	0.539	0.089	0.629
→ +0A04		START TRANSID(READ)		0.000	0.539	0.059	0.599
→ +0784		START TRANSID(READ)		0.000	0.479	0.089	0.569
→ +0804		START TRANSID(READ)		0.000	0.389	0.119	0.509
→ +0A84		START TRANSID(READ)		0.000	0.329	0.089	0.419
→ +0B04		START TRANSID(READ)		0.000	0.359	0.029	0.389
→ +0BF4		SEND TEXT		0.029	0.179	0.059	0.269

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Region Applid, Load Module	Expand to reveal next level.
-	Terminal, Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Region Applid, Load Module	Sort next level by value.
SN	Terminal, Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.

Cmd	When Applied To Object	Action
+	Name	Expand to reveal all entries.
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32A   Region Applid      0.089  17.172  0.929  18.191 |
+-----+

Calculation Details
CICS Transaction                      RDDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      607
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         18.191790
(4) Number of executions of transaction        1
(5) (3) S (4) = mean time for the command     18.191790

The execution measurement counts are
Executing (CPU active)                       3
Suspended by CICS                            573
Delayed
  CICS dispatch delay                        29
  MVS delay (WAIT)                           0
  MVS delay (Busy)                           2

```

## X04 - CICS total service time by terminal ID

### Usage

Use this report to view an analysis of how time was spent on CICS terminals that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multiregion activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS terminal report line to see a further breakdown by transaction, region, program, CICS command, DLI request and SQL request.

## Quantification

Each report line quantifies total times for transactions measured on a terminal. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

## Detail line hierarchy

An unexpanded X04 report shows one line for each measured CICS terminal and 1 line for all non-terminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 CICS Command
        Level 5 CICS Command
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 SQL Request
        Level 5 SQL Request
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 DLI Request
        Level 5 DLI Request
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Module
        Level 5 Module
        Level 5 System Services
      ...
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Adabas Request
        Level 5 Adabas Request
      ...
    Level 3 CICS Region Applid
      Level 4 System Services
        Level 5 Module
        Level 5 Module
        Level 5 System Services
```

## Detail line descriptions

### CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This is the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running non-terminal attached, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This is either Terminal Txn or Non-Terminal Txn.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The total time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The total time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	The total time, in seconds, that execution of transactions on this terminal was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for transactions on this terminal. This includes execution, suspend, and delay time.

### CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	The total time, in seconds, that execution of the transaction was delayed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction. This includes execution, suspend, and delay time.



### CICS region applid detail line

This is the third-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The total time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	The total time, in seconds, that execution of the transaction was delayed in the region.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li><li>• MVS WAIT</li></ul>
Service	The total service time for the transaction in the region. This includes execution, suspend, and delay time.

### CICS program or system services detail line

This is a fourth-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fifth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> <li>• MVS WAIT</li> </ul>
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

### CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> <li>• CICS dispatch delay</li> <li>• MVS dispatch delay</li> </ul>
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

## SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

## DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.  Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

## Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

## Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"><li>• CICS dispatch delay</li><li>• MVS dispatch delay</li></ul>
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

## Sample reports

A sample report that has been expanded five levels is shown below .

```

File View Navigate Help
-----
X04: CICS Total Service Time by Term (1684/CICS32A)          Row 00001 of 00098
Command ==>> _____ Scroll ==>> CSR

----- Total Time in Seconds -----
Name  NTxns Description          Error  Execution  + Suspend + Delay = Service
-----
N/A    340 Non-Terminal Atta ± 5.4%  7.672  1028.360  27.422  1063.455
→ READ 340                ± 5.4%  7.672  1028.360  27.422  1063.455
→ CICS32B Region Applid          3.686  970.788  3.956  978.430
→ SAMPREAD EXEC CICS          3.416  970.788  3.926  978.130
→ +04C4 READ FILE(FILEA)     3.266  970.788  3.926  977.981
→ ALLOCATE Wait on Interregion 0.000  863.885  0.000  863.885
→ IRLINK Wait on InterRegion Li 0.000  106.873  0.000  106.873
→ CICSDisp CICS Dispatch Delay 0.000  0.000  3.086  3.086
→ MVSBusy MVS Delay (Busy)     0.000  0.000  0.839  0.839
→ CICS susp Suspend            0.000  0.029  0.000  0.029
→ +0468 RETURN                0.089  0.000  0.000  0.089
→ +03E0 RETRIEVE              0.059  0.000  0.000  0.059
→

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Region Applid, Load Module	Expand to reveal next level.
-	Terminal, Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Region Applid, Load Module	Sort next level by value.
SN	Terminal, Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

### on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.

Cmd	When Applied To Object	Action
-	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

## Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32B      Region Applid      3.686  970.788  3.956  978.430 |
+-----+

Calculation Details
CICS Transaction          READ
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      32647
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         978.430590

The execution measurement counts are
Executing (CPU active)          123
Suspended by CICS              32392
Delayed
  CICS dispatch delay          103
  MVS delay (WAIT)              0
  MVS delay (Busy)              29

```

## X05 - Combined DB2 IMS MQ Timeline

### Usage

This report combines a subset of data from the F02 DB2 SQL Activity Timeline, the I02 IMS DL/I Call Timeline, and the Q11 MQ+ Activity Timeline reports for a single measurement. When additional information for a specific subsystem is required, refer to the individual timeline report.

Use this report to see information about the chronology of calls for DB2, IMS, and MQ that were intercepted over the duration of the measurement and to identify any calls with excessive service time (duration). Each line displays information

about one intercepted call for either DB2, IMS, or MQ. One or more of the DB2+, IMS+ or MQ+ features must have been enabled when the measurement was performed.

By default, the detail lines are sorted in ascending chronological sequence (SV). You can also request that the data is sorted by service time (duration). Enter the SD line command on the SeqNo heading field to sort by duration. This brings the calls that had excessive service time to the top of the report. If you enter SV or SD a second time, the calls are sorted in the reverse order.

The number of DB2, IMS, and MQ calls that are displayed in this report is limited:

- The value of the DB2IMaxTraceSize, IMSIMaxTraceSize, and MQIMaxTraceSize parameters that are specified during Application Performance Analyzer installation
- Or by the values on panel 2 of the measurement request (if your installation configured these fields)

The report is truncated when the number of calls that are issued reaches the value that is specified for the appropriate MaxTraceSize parameter.

## Quantification

Each report line shows the following information for one call.

- The sequence number within each subsystem reported.
- The subsystem for this call (DB2, IMS or MQ).
- The function for the call.
- The object of the call.
- The resulting status for the call.
- The time the call was issued.
- The service time (duration) for the call processing.
- The CPU time for the call processing.

The CPU time applies only to the region that is being measured. Any execution in other address spaces is not reported.

## Detail Line Hierarchy

An unexpanded report shows a line for each intercepted call. You can expand each line for DB2 and MQ to reveal one additional hierarchical level of detail by using the + line command.

The hierarchy is illustrated here:

```
Level 1 DB2 SQL Call Details
  Level 2 SQL text
  ...
Level 1 IMS DLI Call Details
  ...
Level 1 MQ Call Details
  Level 2 MQ Queue Manager and Queue
  ...
```

## Detail Line Descriptions

### DB2 SQL Call detail line

This is a first-level detail line that shows information about one SQL call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the SQL call. This is sequential within each subsystem.
System	DB2.
Function	The name of the SQL function.
Object	The DBRM name.
Status	The SQL return code. Blank when zero.
Call Time	The time of day at which the SQL call started.
Svc Time	The service time (duration) of the SQL call in seconds.
CPU Time	The CPU time that the SQL call consumed in seconds.

### SQL Text

This is a second-level detail line that is shown directly under the DB2 SQL call detail line. It shows the SQL statement text. If necessary, more than one line is displayed to show the full SQL text.

### IMS DLI Call detail line

This is a first-level detail line that shows the information about one DLI call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the DLI call. This is sequential within each subsystem.
System	IMS.
Function	The DLI function code.
Object	The PCB name.
Status	The PCB status code.
Call Time	The time of day when the DLI call started.
Svc Time	The service time (duration) of the DLI call in seconds.
CPU Time	The CPU time that the DLI call consumed in seconds.

### MQ Call detail line

This is a first-level detail line that shows information about one MQ call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the MQ call. This is sequential within each subsystem.
System	MQ.



Under Heading	This is Displayed
Function	The MQ call type.
Object	Queue.
Status	The return code and reason code returned by MQ. Blank when both are zero.
Call Time	The time of day at which the MQ call started.
Svc Time	The service time (duration) of the MQ call in seconds.
CPU Time	The CPU time that the MQ call consumed in seconds.

## MQ Queue Manager and Queue Name detail line

This is a second-level detail line that is shown directly under the MQ call detail line. It displays the MQ queue manager name and the queue name that are used in the request.

## Sample report

A sample report is shown here:

```

-----
X05: Combined DB2 IMS MQ Timeline (0490/IMSDMPP1)          Row 00047 of 00627
-----
Seqno  System  Function  Object  Status  Call Time      Svc Time  CPU time
-----
000045  IMS     GN        IVPDB2          12:06:50.29    0.011088  0.008552
000046  IMS     GN        IVPDB2          12:06:50.30    0.000156  0.000155
000003  DB2     SELECT    FABPGM06       12:06:50.37    0.009207  0.008881
000001  MQ      Close     Queue           12:06:50.41    0.000215  0.000215
000047  IMS     CHNG      ALTPCB          12:06:50.41    0.000292  0.000292
000048  IMS     ISRT      ALTPCB          12:06:50.41    0.000144  0.000143
000049  IMS     GU        IOPCB           12:06:50.41    0.005714  0.002133
000050  IMS     GN        IVPDB2          12:06:50.42    0.008603  0.004261
000051  IMS     GN        IVPDB2          12:06:50.43    0.071402  0.040834
000052  IMS     GN        IVPDB2          12:06:50.50    0.050327  0.034989
000053  IMS     GN        IVPDB2          12:06:50.55    0.021318  0.009039
000054  IMS     GN        IVPDB2          12:06:50.57    0.000168  0.000168
000004  DB2     SELECT    FABPGM06       12:06:50.67    0.009888  0.009165
000002  MQ      Open      Queue           12:06:50.70    0.000684  0.000684
000003  MQ      Put       Queue           12:06:50.70    0.001024  0.001012
000004  MQ      Get       Queue  1/2079 12:06:50.70    0.000860  0.000860
000005  MQ      Close     Queue           12:06:50.71    0.000180  0.000180
000055  IMS     CHNG      ALTPCB          12:06:50.73    0.000332  0.000328
000056  IMS     ISRT      ALTPCB          12:06:50.73    0.000160  0.000160
-----

```

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a "/" on any input field to open a menu of line commands available for that field).

### on objects

Cmd	When Applied To Heading	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.

Cmd	When Applied To Heading	Action
-	Seqno	Collapse to hide next level.
M	Seqno (IMS and MQ only)	Display load module information.
P	Seqno (IMS and MQ only)	Display source program mapping.

### on heading

Cmd	When Applied To Heading	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
-	Seqno	Collapse to hide next level.
SV	Seqno	Sort by Call Time.
SD	Seqno	Sort by Svc Time (Duration).

---

## Chapter 11. Source program mapping

This section describes the Source Program Mapping feature.

For information about ...	See ...
Entering source mapping details	"A01 - Source program mapping panel" on page 639
Java source program mapping	"A03 - Java source program mapping panel" on page 643
Source mapping dataset list	"A04 - Source mapping dataset list" on page 645
Source mapping common data set list	"A05 - Source mapping common list" on page 647
Source program mapping pick list	"A011 - Source program mapping pick list" on page 648
The source program attribution report	"P01 - Source program attribution" on page 650
DWARF Source Program Attribution report	"P03 - DWARF Source Program Attribution" on page 653
DWARF Source Lines report	"P04 - DWARF Source Lines" on page 655

---

### Introduction to source program mapping

Application Performance Analyzer handles source program mapping differently for Java than for other programming languages.

#### The common data set list

If the Common Data Store (CDS) is enabled during installation of Application Performance Analyzer, users have the ability to create and maintain a common list of source information data sets (for languages other than Java) that is unique to each instance of Application Performance Analyzer. The common data set list is shareable by all users of the Application Performance Analyzer instance. It is accessed from the 'A05: Source Mapping Common List' panel. All users may view the common list and authorized users may update the common list. When Application Performance Analyzer is searching for program source, it will search the user's personal list as defined in the 'A04: Source Mapping Dataset List' panel first, and if not found, then search the common list.

#### For languages other than Java

When you specify source program mapping files, many reports allow you to enter a "P" line command to view the program source associated with that entry in the report. The "P" line command is available on many object types: CSECTs, DB2 SQL statements, CICS commands, etc. The data is displayed in the P01: Source Program Attribution report. This report can also be included in a print request.

#### The 'P' line command

When you enter the 'P' line command, Application Performance Analyzer first checks if the source is loaded. If it is, the source is displayed in the P01: Source Program Attribution report.

If the source is not loaded, your A04: Source Mapping Dataset List is searched for the source member. If no source member is found in any of the data sets, the common list as defined in A05: Source Mapping Common List is searched. If no source member is found in any of the data sets in the list, the A01: Source Program Mapping panel is displayed, allowing you to enter the source mapping information for the current observation session.

When one or more source members are found in your A04: Source Mapping Dataset List or the A05: Source Mapping Common List, the behavior of Application Performance Analyzer depends on whether or not you requested to match the compile date and time. When you request to not match the compile date and time, the first instance of a source member is loaded regardless of its date and time and the source is displayed in the P01: Source Program Attribution report.

When you request to match the compile date and time, the first source member found that matches the load module compile date and time is loaded and the source is displayed in the P01: Source Program Attribution report.

If none of the source members match the compile date and time, a pick list of datasets that contain the source member is displayed in the A011: Source Programming Mapping Pick List panel. When you select one of these source members, it is loaded and you are returned to the report from which you entered the 'P' line command. You must then re-enter the 'P' line command to display in the P01: Source Program Attribution report.

#### **The 'P' line command for COBOL with DWARF**

When a COBOL program is compiled with the TEST option, the DWARF debugging information (which includes the source) is embedded in the load module. When you enter the 'P' line command against such a program, Application Performance Analyzer recognizes that the DWARF debugging information is available in the load module, and loads the source directly from that load module. The source is displayed in the P01: Source Program Attribution report.

This feature requires READ access to the dataset in which the corresponding load module resides. The Common Data Store is not used for COBOL with DWARF, nor is the A01 Source Program Mapping panel. As an alternative to DWARF, the COBOL compile listing may be used for source mapping in the usual manner.

This feature requires access to the TZ environment variable. The CONFIG BASIC TZ setting must be configured with appropriate values during the installation of Application Performance Analyzer. Contact your system programmer to verify the TZ environment variable is configured in Application Performance Analyzer.

#### **The 'P' line command for C/C++ (without timestamp match)**

When you enter the 'P' line command, Application Performance Analyzer first checks if the source is loaded. If it is, the source is displayed in the P01: Source Program Attribution report.

Typically, source mapping for C/C++ programs is dependent on an exact match between the listing timestamp and the CSECT timestamp generated at compile time. A recompiled C/C++ source listing cannot be loaded directly from the A01, A04 or A11 panels. In some cases, this function is required when the source listing that matches the compiled program is not available. To accommodate this situation, Application Performance Analyzer will allow a listing to be loaded for a specific CSECT with no

timestamp matching. You must enter the 'P' line command on a CSECT in one of the supporting reports. You are then directed to the A01: Source Program Mapping panel where you specify the listing to be loaded. This listing will then be loaded and related to the CSECT selected, without timestamp checking, and you are returned to the report. You must then re-enter the 'P' line command to display the P01: Source Program Attribution report.

#### **For Java**

When you specify source program mapping files for Java, the program source is viewed in the detail windows in the Java reports, rather than by using the "P" line command. The detail window from a Java Line Number contains Java source mapping information. This detail window is displayed by entering the "++" command (or the Enter key) on the Java Line Number.

#### **Using DWARF debug files**

If C/C++ programs are compiled with DWARF, you can source map the programs by using DWARF debug files. To source map, you need to specify the "P" line command on a CSECT object in the various CPU reports. This displays the P04: DWARF Source Lines report. In the P04 report, you can use the "P" line command again on a source line object in order to display the P03: DWARF Source Program Attribution report.

You can also go directly to the P03 DWARF Source Program Attribution report (without going through the P04 report), by using the "P" line command on an object code address report line in the C03 report, or an attribution offset line in the W03 report.

The debug file is located within the CSECT for the compiled program. Application Performance Analyzer can extract the debug file name from the executable program during sampling. Therefore, you do not need to identify the debug file via the A01 panel for source mapping. However, Application Performance Analyzer can only extract information from an executable USS file if Application Performance Analyzer can locate the file during sampling. If the USS program is executed by using a relative path name, you must specify the directory in which the executable program can be found. You specify the directory in the Options panel (panel 2) when you create the request.

---

## **A01 - Source program mapping panel**

### **Overview**

This panel allows you to specify and manage associations between source program mapping (SPM) files and observation sessions. Application Performance Analyzer's SPM feature allows measured addresses to be mapped to their corresponding source program statements. You must identify SPM files for each of the observation sessions that use this feature. An SPM file can be sequential or a member in a partitioned data set.

It can be one of the following file types:

- A listing produced by the compiler (COBOL, C, OR C++)
- An ADATA (Associated Data) file produced by High Level Assembler
- A SYSDEBUG file (COBOL or PL/I)
- A side file member produced by the CAZLANGX utility

The SPM files can be retrieved from:

- A PDS(E) or sequential file
- A third party listing (if your installation has enabled support for this)

This panel consists of two sections:

1. An input area in which you can specify an SPM file name and type.
2. A report area in which existing SPM file associations are listed.

A sample Source Program Mapping panel is shown here:

```

File View Navigate Help
-----
A01: Source Program Mapping (1972/TSTJOB01)          Row 00001 of 00058
Command ==>>> _____ Scroll ==>>> CSR

Enter the following information to specify a source mapping file to be
used in the analysis of this measurement information.

File type . . . . _      (L=listing, A=ADATA, S=LANGX SideFile, D=SYSDEBUG)
Data set name . . . _____
                        (Leave blank to search A04 dataset list)
Member name . . . _____ Match on Compile Date & Time  _Y

Seqn ID-ReqNum Type/Status Lang Member DSN
0001 FF21-0002 L-Inact   ASM  CAZC0010  BNPF.FF2100B.LISTINGS
0002 DEMO-0003 L-Inact   ASM  BKNC0120  BN00.TSTP.LISTINGS
0003 DEMO-0004 L-Inact   COB  CAZCOB01  USER1.TSTP.LISTINGS
0004 DEMO-0005 L-Inact   COB  SAMCAZ03  USER2.CICS.LISTINGS

```

Another sample Source Program Mapping panel is shown here. Support for third-party listings has been enabled.

```

File View Navigate Help
-----
A01: Source Program Mapping (1971/TSTJOB01)          Row 00001 of 00058
Command ==>>> _____ Scroll ==>>> CSR

Enter the following information to specify a source mapping file to be
used in the analysis of this measurement information.

File type . . . . _      (L=listing, A=ADATA, S=LANGX SideFile, D=SYSDEBUG)
Repository . . . . _     (T=Third Party, O=Other)
Data set name . . . _____
                        (Leave blank to search A04 dataset list)
Member name . . . _____ Match on Compile Date & Time  _Y

Seqn ID-ReqNum Type/Status Lang Member DSN
0001 FF21-0002 L-Inact   ASM  CAZC0010  BNPF.FF2100B.LISTINGS
0002 DEMO-0003 L-Inact   ASM  BKNC0120  BN00.TSTP.LISTINGS
0003 DEMO-0004 L-Inact   COB  CAZCOB01  USER1.TSTP.LISTINGS
0004 DEMO-0005 L-Inact   COB  SAMCAZ03  USER2.CICS.LISTINGS

```

## File specification input area

In this area, you enter information about an SPM file to be associated with the current observation session. The fields are described below, but these might vary depending on your installation.

### File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

Source information files are supported for the following language versions:

**COBOL:**

- PP 5740 OS/VS COBOL
- PP 5668-958 VS COBOL II
- PP 5688-197 COBOL for MVS/VM
- PP 5648-A25 COBOL for OS/390/VM
- PP 5655-G53 Enterprise COBOL V3
- PP 5655-S71 Enterprise COBOL V4
- PP 5655-W32 Enterprise COBOL V5
- PP 5655-EC6 IBM Enterprise COBOL for z/OS V6

**PL/I:**

- PP 5655-H31 Enterprise PL/I for z/OS v3 (LANGX side files only)
- PP 5655-W67 Enterprise PL/I for z/OS v4 (LANGX side files & SYSDEBUG)

**C/C++:**

- PP 5694-A01 z/OS C/C++ V1.20 and above

For complete information on compiler options, refer to “Required compiler options for creating listings or CAZLANGX side files” on page 812.

## Repository

T for a third party repository, or O for any other type, such as a PDS or sequential data set.

## Data set name

Specify the name of the sequential or partitioned data set containing the SPM file. Your TSO Prefix will be added as the first qualifier if you enter a name without quotes.

If this field is left blank, the A04 Source Map Dataset List is searched for the member name specified.

## Member name

Include the member name if the data set is partitioned.

A member name is required for SYSDEBUG even if the file is being loaded from a sequential file.

## Match on Compile Date and Time

Specify 'Y' for Yes if you want the compile date and time of the source to be matched to the date and time in the matching CSECT in the measurement data. This feature only works with LE compliant modules.

If you use this feature in conjunction with a blank dataset name, your A04 Source Mapping Dataset List is searched for a source module with a compile date and time matching the CSECT. If one is found, it will be loaded. If matching source members are found, but none have the correct date and time stamp, you are given a Pick List of datasets and you can choose to use one of these.

If you specify 'N' for No in conjunction with a blank dataset name, the first instance of a matching source member in your A04 Source Mapping Dataset List is loaded, regardless of its date and time.

The behavior of this setting applies only to non C/C++ Source Map datasets. For C/C++, the field is ignored. C/C++ source mapping always requires a date/time match.

## List of existing SPM file associations

This section shows a scrollable list of existing associations between SPM files and observation sessions. These SPM associations are “private” to your own TSO userid and are recorded in your TSO profile. Each TSO user needs to set up his or her own SPM information.

Any entries for file associations applicable to the current observation session will appear at the top of the list. The value under the ID-ReqNum field will be displayed in red to indicate this.

Fields displayed in the File Association List are described here:

**Seqn** This is simply the line number of the entry. Line commands can be entered to this field.

### ID-ReqNum

This shows the observation session request number with which the SPM file is associated. The request number is prefixed by the Application Performance Analyzer identifier.

### Type/Status

This indicates the type of SPM file and whether the mapping information has been “loaded” (available for use). “L” indicates a compiler listing file, “A” indicates an assembler ADATA file, “S” indicates a LANGX SideFile, and “D” indicates a SYSDEBUG file.

**Lang** The source program language is shown here: ASM, C, C++, COB, or PLI.

### Member

The member within a partitioned data set is shown here. This field is blank if the data set is non-partitioned.

**DSN** The data set name of the SPM file is shown here.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	Seqn	Display context help information.
++	Seqn	Show additional details.
C	Seqn	Copy this SPM file association to the current observation session.
D	Seqn	Delete this entry.
L	Seqn	Load this SPM file and bind it to the current observation session.
F	Seqn	Fill the input fields with the values for this SPM file association



---

## A03 - Java source program mapping panel

### Overview

This panel allows you to specify information needed by the Source Program Mapping (SPM) feature for Java programs.

During the measurement, the measurement task determines and records source file names for each of the Java classes in which execution is observed. However, the source file names are not fully qualified. Use this panel to specify sequences of file name prefixes that will be concatenated as high level qualifiers to the captured source program file names in order to form fully qualified HFS path names.

The A03 panel lets you save a set of file name prefixes in an ordered list. Each name in the list is assigned a search sequence ("SrchSeq"): 01, 02, 03, etc.

**Note:** It is helpful to think of the file name prefixes as directory names, and think of stored Java class source file names as files within these directories. Using this analogy, SPM tries to locate a Java class source file by searching each of these directories. It searches the directories in the sequence (01, 02, 03, etc.) indicated by the SrchSeq value.

You can store a default, global list of prefixes and you can store a list for a specific measurement. When attempting to resolve file names, SPM will search the directories specified for the particular measurement first, and then it will search the global list.

If you enable Application Performance Analyzer for jar file source mapping support, the directories specified in the A03 panel are searched for jar files when you attempt to find the Java class source file. If a standalone Java source file is not found in a directory, any jar files in that directory would be searched for a matching Java source file. The jar files must be encoded in UTF-8 format. If you add Java source encoded in EBCDIC to a jar file, the source would not be extracted in readable form. Jar support is provided primarily for applications that are developed on workstations, such as WebSphere applications. Contact your system programmer to verify whether jar file support is enabled.

The Java source program mapping panel consists of two sections:

1. An input area in which you specify a file name prefix to be added to a list, and an option specifying whether you are working with the global (default) list or the list for the current measurement.
2. A scrollable list of file name prefixes. The list you are working with (current measurement or default) appears at the top of the list.

A sample Java source program mapping panel is shown here:

```

File View Navigate Help
-----
A03: Java Source Program Mapping (7544/JVMST01) Row 00001 of 00007
Command ==> _____ Scroll ==> CSR

Enter "/"
/ To work with file name prefix list for curent measurement. Blank
  for global (default) file name prefix list.

Enter new HFS path name prefix to be added (up to 150 characters)
_____
_____

Seqn ID-ReqNum SrchSeq Path Name
0001 SST -7544 01 /u/java/src
0002 SST -7544 02 /u/jtest/pathOne
0003 SST -7537 01 /u/jtest/pathThree/security/Section/src
0004 SST -7537 02 /u/java/src
0005 SST -7537 03 /u/jtest/pathFive/development/source
0006 SST -7537 04 /u/jtest/pathFour
0007 SST -7537 05 /u/jtest/pathTwo/alphaAlpha/bravoBravo/charlieCharli

```

## File prefix specification input area

Specify either '/' or blank in the option field to indicate whether you want to work with the file prefix list for the current measurement or with the global (default) file prefix list.

To add a new file name prefix to the selected list, enter the prefix name in the two line input field. A prefix name can have up to 150 characters. The name will be added to the end of the ordered list, which means it will be assigned the highest SrchSeq value.

## Detail lines

This area is scrollable. Each detail line displays a file name prefix, which are organized by ordered-list groups.

Under Heading	This is Displayed
Seqn	A sequence number indicating the detail line's position in the entire scrollable list. This field accepts line commands. Enter "/" to display a line command menu for this field.
ID-ReqNum	The name of the measurement task and the request number of the measurement to which the file prefix applies. A value of 0000 appears for the request number if the path name is part of the default list and applies globally.
SrchSeqn	A value indicating the relative sequence in which the file prefix is applied. SrchSeq values for an ordered list begin with 01 and appear in sequence (01, 02, 03, etc.). The maximum value is 99.
Path Name	The file path name prefix. This name can end with a forward slash. If it does not end with a forward slash, one will automatically be added before it is concatenated with the Java class source file name.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

## on objects

Cmd	When Applied To	Action
?	Seqn	Display context help information.
D	Seqn	Delete the entry.
H	Seqn	Move higher in search order.
L	Seqn	Move lower in search order.
S	Seqn	Copy path name to input field.

## Java report detail window

Once the Java source program mapping details have been entered in the A03 panel, the source can be viewed in the detail windows of the Java reports. Display the detail window by entering the “++” line command (or enter key) on the Java Line Number object in the Java report.

A sample Java report detail window with source mapping is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
|   → 00817   line # 817           0.33           |
+-----+
More:  - +

Package Name   java/lang
Class Name     String
Method Signature charAt(int) char
Source File Name /u/java/src/java/lang/String.java

LineNo Source Statement
-----
00814      *           string.
00815      */
00816      public char charAt(int index) {
00817          if ((index < 0) || (index >= count)) {
00818              throw new StringIndexOutOfBoundsException(index);
00819          }
00820          return value[index + offset];
00821      }
00822
00823      /**
00824       * Copies characters from this string into the destination char
00825       * array.
```

---

## A04 - Source mapping dataset list

### Overview

This panel allows you to specify a list of dataset names that Source Program Mapping (SPM) will use to search for a source program. The datasets will be searched in the specified order. The list is saved in the common data store, if enabled, otherwise it is saved in your ISPF profile. The list is searched when the 'P' line command is entered and when you do not specify a dataset name in the A01 Source Program Mapping panel.

A sample panel is shown here:

```

File View Navigate Help
-----
A04: Source Mapping Dataset List (1068/TSTJOB01) Row 00001 of 00020
Command ==> _____ Scroll ==> PAGE

Specify up to 20 listing repository datasets. These will be searched
when the P line command is entered or on the A01 panel when you leave
the dataset name blank on a new entry.

Match on Compile Date & Time Y

Seqn File Type Repository Dataset Name
0001 S 0 USR1.IDILANGX
0002 L 0 USR1.COBOL.LISTING
0003 D 0 USR1.TST.COBOL.DEBUG
0004 A 0 USR1.ADATA
0005 - - 
0006 - - 
0007 - - 
0008 - - 
0009 - - 
0010 - - 
0011 - - 
0012 - - 
0013 - - 
0014 - - 
0015 - - 
0016 - - 
0017 - - 
0018 - - 
0019 - - 
0020 - - 

```

## Match on Compile Date & Time description

The value entered here applies to all entries in the dataset list. Specify 'Y' for Yes if you want the compile date and time of the source to be matched to the date and time in the matching CSECT in the measurement data. Specify 'N' for No if you want the source to be loaded regardless of its date and time. For more details, refer to “Match on Compile Date and Time” on page 641.

## Dataset list description

A scrollable list of up to 20 dataset names can be maintained here. Each row in the list consists of four parts: a sequence number, a file type, a repository and a dataset name field. These fields are described below.

**Seqn** A sequence number indicating the detail line's position in the list. This field accepts line commands to Move, Insert, and Delete. To display a line command menu for this field, enter / .

### File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

### Repository

Specify T for a third party repository, or O for any other type.

### Dataset name

The name of the dataset to be searched. This is an input field where you specify a fully qualified dataset name. The name must not be enclosed in quotes.

## Commands to save and edit

This panel supports a limited set of ISPF Edit type line commands. The commands supported are listed below. (Block moves are not supported).

I      Insert  
D      Delete  
M      Move  
A      After

PF3 or the END command saves the list and terminates the dialog, but you must press Enter first to record any changes. The CANCEL command terminates the dialog without saving any changes.

---

## A05 - Source mapping common list

### Overview

This panel allows you to specify a common list of dataset names that Source Program Mapping (SPM) uses to search for a source program. This list is common to all users, and is searched in the specified order when the 'P' command is used, and a source match is not found in the user's personal dataset list as defined in their A04: Source Mapping Dataset List panel. The list is saved in the common data store, and can be maintained by any user with AdministerProduct authorization. Users without AdministerProduct authorization can view the list, but update operations are disabled. For details on setting up AdministerProduct authorization, refer to Chapter 2 of the *Application Performance Analyzer for z/OS Customization Guide*.

When datasets in the common list are searched, the user's setting for 'Match on Compile Date & Time' as defined in their A04: Source Mapping Dataset List panel is used. By default, Application Performance Analyzer will not search for an exact match on compile date and time.

A sample panel is shown here:

```
File View Navigate Help
-----
A05 - Source Mapping Common List (0002/TSTJOB)          Row 0001 of 00050
Command ==> _____ Scroll ==> CSR

Specify up to 50 listing repository datasets to be used as a common
list of datasets for all users when source mapping.

Seqn  File Type  Repository  Dataset Name
-----
0001  L           0           COMMON.COBOL.SOURCE
0002  S           0           COMMON.PLI.IDILANGX
0003  A           0           COMMON.ADATA
0004  -           -           _____
0005  -           -           _____
0006  -           -           _____
0007  -           -           _____
0008  -           -           _____
0009  -           -           _____
0010  -           -           _____
```

## Dataset list description

A scrollable list of up to 50 dataset names can be maintained here. Each one in the list consists of four parts: a sequence number, a file type, a repository, and a dataset name field. These fields are described below.

**Seqn** A sequence number indicating the detail line's position in the list. This field accepts line commands to Move, Insert, and Delete. To display a line command menu for this field, enter / .

### File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

### Repository

Specify T for a third party repository, or O for any other type.

### Dataset name

The name of the dataset to be searched. This is an input field where you specify a fully qualified dataset name. The name must not be enclosed in quotes.

## Commands to save and edit

This panel supports a limited set of ISPF Edit type line commands. The commands supported are listed below. (Block moves are not supported).

I	Insert
D	Delete
M	Move
A	After

PF3 or the END command saves the list and terminates the dialog, but you must press Enter first to record any changes. The CANCEL command terminates the dialog without saving any changes.

---

## A011 - Source program mapping pick list

### Overview

This dialog is displayed by the 'P' line command and the A01 Source Program Mapping panel. It is displayed when you have requested that your SPM dataset list be searched for a source member with a compile date/time match, but no date/time match can be found. A list of datasets containing members which match the SPM mapping request, but not the date and time, is presented in the Pick List.

From this list you can select (pick) an SPM dataset that you wish to use for source mapping purposes. After selecting an SPM dataset and pressing Enter, the selected SPM dataset and member will be loaded and bound to the current observation session. Also, when displayed from the A01 Source Program Mapping panel, a new row is added to the A01 SPM list reflecting this addition.

A sample pick list panel is shown here:

```

File View Navigate Help
-----
A011: Source Program Mapping Pick List (2399/TSTJOB01)      Row 00001 of 00002
Command ==> _____ Scroll ==> CSR

Member Name: LPFRAYVS
Load Module: LPFRAYVS CSECT: LPFRAYVS
Observed Compile Date and Time: n/a

Seqn Dataset Name                               Compile Date and Time
---
0001 USR1.TST.COBOL.LISTING2                     2006/01/30 07:09:05
0002 USR1.TST.COBOL.LISTING5                     2006/01/30 11:16:09
0003 USR1.TST.COBOL.LISTING7                     2007/07/02 13:21:29
0004 USR1.TST.COBOL.LISTINGE                     2006/04/17 16:45:02

+-----+
| No match found. Select a dataset from the list and press Enter, or press PF3 |
| to return to the previous panel without a selection. This Pick List is    |
| displayed because you specified a blank dataset name and 'Match on Compile |
| Date & Time', but no date and time matches were found for this member in  |
| your list of datasets.                                                    |
+-----+

```

## Field descriptions

### Member name

The source member name.

### Load module

The load module name that matched the source member and the measurement.

### CSECT

The CSECT name that matched the source member and the measurement.

### Observed compile date and time

The date and time extracted from the LE entry point for the CSECT. This is only available for LE compliant modules.

## Pick list description

This lower section of this panel is a scrollable list. Each row in the list consists of three fields: a sequence number, a dataset name, and compile date & time. These fields are described below.

The Select line command allows you to select the SPM dataset you want to use. When this dialog is displayed from the A01 Source Program Mapping panel, after selecting a dataset and pressing Enter, the selected dataset is loaded and added to your list of SPM file associations and you are returned to the A01 dialog. When this dialog is displayed from the 'P' line command, the source member from the selected dataset is loaded and after pressing Enter, you are returned to the report from which you entered the 'P' line command. You must then re-enter the 'P' line command to display in the P01: Source Program Attribution report. In either case, press PF3 to return without making a selection.

**Seqn** A sequence number indicating the detail line's position in the entire scrollable list. This field accepts the 'S' (Select) line command.

### Dataset name

The name of the SPM dataset containing the SPM data for the CSECT found in the current observation.

## Compile Date and Time

The date and time when this SPM member was created (compiled).

---

## P01 - Source program attribution

### Overview

This report maps measured CPU activity to its corresponding source program statements. You use the “P” line command, on an eligible line command field, to launch this report. (See the individual Performance Analysis reports to determine which lines allow the “P” command.) Source statements from a single compile (or assembly) unit are shown. Depending on the selected SETUP options, all or part of the source program is shown. A count value is shown for statements in which CPU activity was measured; each count value indicates the number of times execution in the statement was observed. Optionally, depending on a SETUP option, the counts are also shown graphically.

This report also shows attribution of CPU usage measured in system modules referred back to the points of invocation in application modules (“Referred Attribution”). This referred attribution line is displayed directly under the source statement, and is displayed in pink.

A sample report is shown here with the graphics option turned off.

```
File View Navigate Help
-----
P01: Source Program Attribution (0453/TSTJOB01) Row 00001 of 00043
Command ==> _____ Scroll ==> CSR

LineNo Offset Count Source Statement
000120
000121 *-----
000122 00034A Open Input DataFile1
9 <- CPU time attributed to above statement
000123
000124 00036C If DataFile1-file-status-ok
000128 End-If
000129
000130 000388 Open Output DataFile2
7 <- CPU time attributed to above statement
000131
000132 0003A6 If DtaFile2-file-status-ok
000167 *-----
000168
000169 0004B0 2 Read DataFile1
000170 At End
000171 0004F4 Set DataFile1-eof To True
000186 00050A Move dataRecord to dataRecordCopy
000187
000188 000510 8 Perform until Char-Column > 80
000189
000190 000524 If dataChar(Char-Column) Not = Space
000193 00056C Move 1 to Word-Length(Word-Count)
000194
000195 000582 6 Perform until dataChar(Char-Column) = Spac
000196 or Char-Column > 80
000197 0005AE Add 1 to Char-Column
000229 00066A Move Word-Length(Word-Subscript1) to ws-Word-
000230
000231 000688 735 Perform until Word-Updated or
```



```

File View Navigate Help
-----
P01: Source Program Attribution (0453/TSTJOB01) Row 00001 of 00043
Command ==> _____ Scroll ==> CSR

LineNo Offset Count Source Statement
000169 0004B0 2 Read DataFile1
000170 At End
000171 0004F4 Set DataFile1-eof To True
000186 00050A Move dataRecord to dataRecordCopy
000187
000188 000510 8 Perform until Char-Column > 80
000189
000190 000524 If dtaChar(Char-Column) Not = Space
000193 00056C Move 1 to Word-Length(Word-Count)
000194
000195 000582 6 Perform until dataChar(Char-Column) = Spac
000196 or Char-Column > 80
000197 0005AE Add 1 to Char-Column
000229 00066A Move Word-Length(Word-Subscript1) to ws-Word-
000230
000231 000688 735 Perform until Word-Updated or
000232 Word-Subscript2 > Total-Word-Co
000233
000235 0006D0 Move Word-Length(Word-Subscript1) to ws-Wo
000236
000237 0006EE 49 If All-Word-Value(Word-Subscript2) =
000238 dataRecordCopy(ws-Word-Column:ws-Word-L
000239 000730 Add 1 to All-Word-Count(Word-Subscript2)
000249 00079E Move Total-Word-Count to Word-Subscript2
000250 0007A8 Move 1 to All-Word-Count(Word-Subscript2)
000251 0007C2 15 Move dataRecordCopy(ws-Word-Column:ws-Word
000252 to All-Word-Value(Word-Subscript2)
000253 End-If

```

## Code segments

The reported CPU activity depends on the item upon which the “P” line command was entered to launch this report. Only the CPU activity which was aggregated to quantify that item is included in the source mapping report. If, for example, this report was launched from an item on the CPU Usage by Code Slice report, then only activity for the range of addresses in the selected “slice” is reflected in the source statement counts. Statements outside such a selected address range are displayed in blue, while those within the range appear in green.

## Detail line descriptions

### LineNo

This field displays a 6 digit sequence number corresponding to the source statement line position. The sequence values begin at 000001 and increase by 1 for each statement. Gaps in the sequence occur if SETUP options are chosen resulting in some statements being omitted from the report. This field is also an input field and accepts line commands.

### Offset

This field contains the hexadecimal offset of the object code associated with the source statement. The offset is relative to the beginning of the CSECT (Control Section). Blanks are shown here if there is no object code address associated with the statement (comments, continuations, non-procedural statements, etc.).

## Count

The number of times execution was observed at the statement is shown here, or blank if no execution was measured. The maximum value is 9999. Values exceeding 9999 are shown as 9999+.

## Source statement

The source program statement is shown here. For an assembler program, you can select a SETUP option to choose whether to show only the 80 byte source statement or to show the full assembly listing format (including offset, object code etc.)

## Header information

A SETUP option can be selected to display information about the mapped program in the heading section of each page. This information includes: load module name, load library name, CSECT name, source mapping file name, compile date/time, and code segment address range (when applicable). It is usually preferable to turn off this option as it occupies several lines at the top of the screen.

## SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
-----
P Options for Source Program Mapping                                001 of 00068
C                                                                    11 ==> CSR
L Nbr of adjacent lines to display . . . . 2
  This specifies the number of statements
  without measured activity to be displayed
  before/after lines with activity.
0
0
0 Enter "/" to select an option
0 - Display ALL statements of the source program.
0   (otherwise only those at or near statements
0   with measured activity are displayed.)
0 - Include assembler object code.
0 / Show statement count graphically.
0 - Show detailed information in heading.
0 - Show C/C++ pseudo-assembly.
0 - Display values as a percent.
0   (Not applicable to all reports)
0
0
0 -----
                                     pace
```

### Number of adjacent lines to display

Use this parameter to control how many adjacent source lines you would like to see on either side on a source line with activity. This is used to give context to the active source lines displayed. This parameter is ignored if you turn on the Display ALL statements option.

### Display ALL statements

Choose this option if you would like to see the entire source program. Otherwise, only source statements with activity, or statements adjacent to statements with activity are included.

### Include assembler object code

Use this option to choose whether to show only the 80 byte source statement or to show the full assembly listing format (including offset, object code etc.). This is for Assembler programs only.

### Show statement count graphically

This option will cause a graph to be displayed on top of the source statements, indicating how much activity each active source statement has.

### Show detailed information in heading

This option will cause detailed information about the source program to be displayed. This includes the load module, name of library it was loaded from, the CSECT, the source mapping file name, compiler name, and compile date and time.

### Show C/C++ pseudo assembly

This option will cause pseudo-assembly for C/C++ programs to be displayed.

### Display values as a percent

This option will cause the values for the source statement to be displayed as a percentage (instead of a count). This is only applicable when you are source mapping from a report which shows percentages.

## Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
Source Statement Information
      Perform until Char-Column > 80
CSECT Name:      COB01
Offset:          000510
Object Code Size: 20 bytes
Activity Count:  8 times

Module Information for COB01
Load Address     08B00B38 to 08B01FFF
Module Size      5,320
Attributes       REUS,NORENT,APFLIB
Module Location  JPA
Loadlib DDNAME   STEPLIB
Load Library     BNPF.UTIL.LOADLIB

ESD Information for COB01
External Offset Length Start Addr End Addr
COB01 000000    4152 08B00B38 08B01B6F
IGZEBST 001038    1168 09B01B70 08B01FFF
+-----+
```

---

## P03 - DWARF Source Program Attribution

### Overview

The P03 report is used for source mapping DWARF programs. It requires the programs to have debug files in the ELF/DWARF format associated with them.

This report maps measured CPU or Wait activity to its corresponding source program statements. Use the “P” line command, on an eligible line command field (see below), to launch this report. Source statements from a single compile unit are shown. A count or percent value is shown for the statement selected in which CPU activity was measured; the count value indicates the number of times execution of

the statement was observed. A percent value shows the percent as calculated on the report. Optionally, depending on a SETUP option, the counts are also shown graphically.

A sample report is shown here.

```

File View Navigate Help
-----
P03: DWARF Source Program Attribution (0539/JVMTST01) Row 00028 of 00047
Command ==> _____ Scroll ==> PAGE

LineNo Count Source Statement
000028                l = i + m;
000029          /*      printf(" a[I]=%d a[L]=%d

000030                c++;
000031 120              if (a[i-1] <= a[l-1]) {
000032                i = 0;
000033                } else {
000034                t = a[i-1];
000035                a[i-1] = a[l-1];
000036                a[l-1] = t;
000037                i = i - m;
000038                s++;
000039                }
000040                }
000041                j += 1;
000042                }
000043                m = m >> 1;
000044                }
000045                printf(" iterations=%d swaps=%d
000046                }

```

### Eligible line commands

The P03 report can be launched with a “P” line command from one of the following:

- A DWARF Source Line in the P04: DWARF Source Lines report
- An object code address report line in the C03 report
- An attribution offset line in the W03 report

## Detail line descriptions

Table 7. Detail Line Descriptions

Under Heading	This is Displayed
LineNo	This field displays a 6 digit sequence number corresponding to the source statement line position.
Count	The number of times execution was observed at the statement is shown here. The maximum value is 9999. Values exceeding 9999 are shown as 9999+.
Prcnt	If the percent option has been selected in the SETUP for source mapping, the values for the statement are displayed as a percentage. This percentage is the same as percent shown on the report for that line item.
Source Statement	The source program statement is shown here.

## Header information

A SETUP option can be selected to display information about the mapped program in the heading section of each page.

Table 8. Mapped Program Header Information

Under Heading	This is Displayed
Debug file	This is the absolute path name of the DWARF debug file that was generated by the compiler for the selected CSECT (Control Section).
Debug file date	This is the current file modification date and time of the DWARF debug file. A zero value indicates that the date is unknown.
Compile date	This is the date and time that the CSECT was compiled, as recorded in the executable program. If the current file modification date and time of the debug file differs from the compile date and time by more than 1 minute, a warning is displayed.
Source file name	This is the absolute path name of the source file that contains the requested source statement line.
Source file date	This is the current file modification date and time of the source file. A zero value indicates that the date is unknown.
Source compile date	This is the date and time that the source file was compiled, as recorded in the DWARF debug file. If the current file modification date and time of the source file is not the same as the compile date and time, a warning is displayed. A zero value indicates that the date is unknown.

## SETUP options

The following SETUP options can be selected with the SETUP primary command:

### Show statement count graphically

This option will cause a graph to be displayed on top of the source statements, indicating how much activity each active source statement has.

### Show detailed information in heading

This option will show the following additional header fields: Debug file, Debug file date, Compile date, Source file name, Source file date, and Source compile date.

### Display values as a percent

This option will cause the values for the source statement to be displayed as a percentage (instead of a count). Not applicable to all reports.

---

## P04 - DWARF Source Lines

### Overview

The P04 report is used for mapping source lines in DWARF programs. It requires the programs to have debug files in the ELF/DWARF format associated with them.

This report maps measured CPU or Wait activity to specific source lines within a CSECT. Use the "P" line command, on an eligible line command field, to launch this report. Source statements from a single compile unit are shown. A percent value is shown for source statements in which CPU activity was measured. A "P" command can be entered on the LineNo field to see the source for that line.

A sample report is shown here.

```

File View Navigate Help
-----
P04: DWARF Source Lines (0539/JVMST01)                               Row 00001 of 00017
Command ==> _____ Scroll ==> CSR

Debug file name      /u/aif04/xcs5d.dbg
Debug file date      2007-11-12 15:13:11
Compile date         2007-11-12 15:13:10

LineNo  FileNo      Percent of CPU Time * 10.00% ±3.2%
      *...1...2...3...4...5...6...7...8...9...*

000031      1      12.77=====
000027      1      6.60 =====
000035      1      4.89 ==
000034      1      4.57 ==
000028      1      4.36 ==
000036      1      4.36 ==
000040      1      3.19 ==
000025      1      2.55 =
000030      1      2.44 =
000033      1      2.44 =
000041      1      2.34 =
000038      1      2.02 =
000037      1      1.91 =
000039      1      1.70 =
000032      1      1.38 =
000026      1      0.63
000042      1      0.53

```

## Detail line descriptions

Table 9. DWARF Source Detail Line Descriptions

Under Heading	This is Displayed
LineNo	This field displays a 6 digit sequence number corresponding to the source statement line number.
Fileno	This field contains the file number for the source module within the CSECT (Control Section).
Percent of CPU Time	Displays the percent of CPU active samples on this line number out of the total number of CPU active samples taken.

## Header information

Table 10. DWARF Source Header Information

Under Heading	This is Displayed
Debug file	This is the absolute path name of the DWARF debug file that was generated by the compiler for the selected CSECT (Control Section).
Debug file date	This is the current file modification date and time of the DWARF debug file. A zero value indicates that the date is unknown.
Compile date	This is the date and time that the CSECT was compiled, as recorded in the executable program. If the current file modification date and time of the debug file differs from the compile date and time by more than 1 minute, a warning is displayed.

## Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to popup a menu of line commands available for that field.)

### on objects

Cmd	When Applied To Object	Action
?	LineNo	Display context help information.
++	LineNo	Show additional details.
P	LineNo	Display source program mapping.

### on headings

Cmd	When Applied To Heading	Action
?	LineNo	Display context help information.
SV	LineNo	Sort next level by value.

## Detail window

You can enter "++" (or the Enter key) on any line to display a popup window containing additional information.

A sample detail window for this report is shown here:

File View Navigate Help

```
+-----+
+----- The following report line was selected -----+
| 000031      7      12.77 =====|
+-----+
```

Calculation Details

CPU measurements	120
In the csect	.P000014
File Number	7
Line Number	31
Total CPU measurements	939
Percent of total	12.77%

```
000031          if (a[i-1] <= a[l-1])  {
```



---

## Chapter 12. Printing reports and creating XML documents

This section explains how to produce Application Performance Analyzer performance analysis reports suitable for printing, or in XML document format suitable for further processing. You generate a printable report or an XML document, in batch, by submitting JCL. In most situations, you can use Application Performance Analyzer's ISPF-based report request facility which will generate and submit the JCL for you. This facility is discussed in the first two sections of this chapter. The remaining sections explain the JCL and control statements; these sections are of interest only if you intend to prepare the JCL and control statements manually.

For information about ...	See ...
The available options, and overall capabilities of the report printing facility	"About Application Performance Analyzer's report printing and XML document feature"
Using Application Performance Analyzer's ISPF-based report request facility	"Using the ISPF report request facility" on page 660
How to prepare JCL to produce reports	"Preparing JCL to print reports or create XML documents" on page 664
Control statements to specify report options	"Specifying control statements" on page 667
Producing, viewing and printing high-quality reports in PDF format	"Reports in PDF format" on page 671
Processing and transferring report data contained in XML document files	"Reports in XML document format" on page 671
The sections that you can include in a performance analysis report and how to specify them in SECTION control statements	"Report SECTION descriptions" on page 671

---

### About Application Performance Analyzer's report printing and XML document feature

Most of the Application Performance Analyzer's interactive performance analysis reports are available in format suitable for printing or in XML document format suitable for further processing. Application Performance Analyzer allows you to generate reports and XML documents by submitting JCL that executes the program CAZPRINT. You can use Application Performance Analyzer's ISPF-based report request facility to build the necessary JCL and CAZPRINT control statements. Alternatively, you can manually prepare and submit your own JCL. CAZPRINT can produce report output in three different formats:

#### Line printer

The traditional FBA 121 character-per-line SYSOUT format.

**PDF** Adobe Portable Document Format.

**XML** Extensible Markup Language document format.

#### Line printer format

You would typically route line printer format as a JES SYSOUT file. You produce this by specifying a PRINT control statement. You specify a DD name in the PRINT

statement and supply a DD statement for that name. This is the most direct (and convenient) way of producing report output, but formatting is constrained by inherent line printer device limitations.

## PDF format

PDF is the preferable format because it offers high quality printed output as well as advanced viewing capabilities. You produce a PDF file by specifying a CONVERT control statement. You specify a DD name in the CONVERT statement and supply a DD statement for that name which defines the output file. You then need to transfer the file to a PC platform on which you can view and print the report.

## XML document format

When you wish to further process the report data, you can produce an XML document file. You produce an XML document file by specifying a CONVERT control statement. You specify a DD name in the CONVERT statement and supply a DD statement for that name which defines the XML document file. You may browse, edit or further process the XML document on the mainframe, or transfer it to another platform. XML documents are produced in the English language only.

## Report sections

A single performance analysis report is comprised of a number of report Sections. A report section typically has a counterpart report in the ISPF reporting environment. For example, *C01: CPU Analysis by Category* is implemented as a single report in the ISPF environment and can be included as one section of a printed report. The same 3- character identifiers used to denote ISPF reports are used to denote report sections. You specify that a report section is to be included by supplying a SECTION control statement.

---

## Using the ISPF report request facility

To request a batch performance analysis report or XML document using Application Performance Analyzer's ISPF facility, select an observation session item in the usual way – enter the "R" line command on the observation session list screen. Then, from the report selection menu, select A02.

A screen will then be displayed listing the available report sections that you can select to be included in the report or XML document.

An example of the A02 dialog is shown here.

```

File View Navigate Help
-----
A02: Request Printed Reports (0464/TSTJOB01)          Row 00001 of 00030
Command ==> _____ Scroll ==> CSR

Enter / to include a section in the report or file, blank to exclude the section,
S to include the section and set formatting options. Use UP/DOWN (PF7/PF8)
to scroll the list of report sections. After entering your selections,
press ENTER to generate the report JCL.

  Select  Report Section
  /       S01 Session Statistics
  /       S02 Load Module Attributes
  /       S03 Load Module Summary
  /       S04 TCB Summary
  /       S05 Memory Usage Timeline
  /       S06 Data Space Usage Timeline
  /       S07 TCB Execution Summary

  /       C01 CPU Usage by Category
  /       C02 CPU Usage by Module
  /       C03 CPU Usage by Code Slice
  /       C04 CPU Usage Timeline

```

You simply make your selections, press ENTER, and Application Performance Analyzer will build and submit the JCL. The selectable report sections—as illustrated above—include only those applicable to the selected measurement file. DB2 report sections, for example, will not appear as available selections if no DB2 data exists in the measurement file. By default, all the applicable reports are selected. However, if you prefer to have the previous selections “remembered”, you can request this using the SETUP primary command while you are in this panel.

## Specifying formatting options

You can modify the format of some report sections by specifying formatting options. To do so, select the report section with the “S” line command instead of a slash (/) character. A pop-up window will appear in which you can modify the current option values.

If you enter more than one “S” line command, the formatting option pop-up window for only the first one encountered will appear; you should enter “S” line commands one at a time. The following illustrates the formatting options pop-up window, which will appear if you enter the “S” line command on the C01: CPU Usage by Category report section.

```

File View Navigate Help
+-----+
A02: Report Parameters (0464/TSTJOB01)
Command ==> _____ Scroll ==> CSR

The following are options for C01: CPU Usage by Category
Modify the option values and press ENTER.

Value      Description
9        Number of levels (1 to 9) of report line
           hierarchical expansion.
VALUE    Report sort sequence: NAME or VALUE
/        / to categorize modules by "Group".
           Unselect to categorize by "SubGroup"
1.00    Minimum percentage of CPU activity measured
           for which an item is to be included in the
           report.
+-----+

```

Modify the values and press the ENTER key and you will be returned to the report section selection dialog.

Application Performance Analyzer will “remember” the option values you specify. These will become your new default values and will be used for future printed report requests.

## The JCL submission/EDIT dialog

Pressing ENTER to the report section selection dialog will take you to the JCL submission dialog – if you did not modify any input fields prior to pressing ENTER. The report section selection dialog will continue to display until you have pressed ENTER without having modified any input fields.

The JCL submission dialog is illustrated below. Pressing the ENTER key will cause the generated JCL to be submitted directly, or will launch EDIT for the generated JCL member. This dialog is illustrated here.

```

File View Navigate Help
+-----+
A02: Report JCL Submission (0464/TSTJOB01)
Command ==> _____ Scroll ==> CSR

Specify the following and press ENTER to either SUBMIT the print
JCL or to launch EDIT for the generated JCL.

Enter "/" to select options
 / produce PDF (Portable Document Format) file
 7 generate JES-managed report file (SYSOUT=*)
 _ produce XML (Extensible Markup Language) file

 _ EDIT the generated JCL member, otherwise SUBMIT

Job Statement - edit if necessary
==> //USER1P___JOB_(),'CAZRPT01',CLASS=A,MSGCLASS=T,NOTIFY=&SYSUID
==> /*_____
==> /*_____

PDF File DSN (if applicable) must be cataloged FB 80
==> USER1.FB80'

XML File DSN (if applicable) must be cataloged FB 255
==> _____

Location where generated JCL is to be saved
JCL Library ==> 'USER1.JCLLIB'
JCL Member ==> CAZRPT1
+-----+

```

## Input to the JCL submission/EDIT dialog

### Produce PDF file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a file in downloadable PDF (Portable Document Format) file.

### Generate JES-managed report file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a standard SYSOUT format report file.

### Produce XML file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a file in XML (Extensible Markup Language) document format. This option cannot be selected when either the PDF file or the JES-managed report file options are selected.

### EDIT the generated JCL

Enter a slash (/) if you want EDIT to be launched for the generated JCL member when you press the ENTER key. Blank in this field will cause the JCL to be SUBMITted immediately when you press the ENTER key.

### Job Statement

The generated JOB statement is shown. You can modify the statement to suit your preferences or to comply with your installation. Be aware, however, that no validation is done on your input; an input error can cause a JCL error when the job is submitted.

### PDF File DSN

If you have specified that a PDF file is to be written, you must specify the DSN of the file in this field. The file must be a sequential dataset with fixed length 80 byte records. If the file is not pre-allocated and cataloged, Application Performance Analyzer allocates and catalogs it.

### XML File DSN

If you have specified that an XML document file is to be written, you must specify the DSN of the file in this field. The file must be a sequential dataset with fixed or variable length 255 byte records. If the file is not pre-allocated and cataloged, Application Performance Analyzer allocates and catalogs it.

### JCL Library

Enter the DSN of a JCL library. This a partitioned data set in which the generated JCL member will be stored before it is submitted (or EDITed).

### JCL Member

Enter the name of the JCL member here.

## Source program mapping

The report section selection dialog displays one selectable line for the P01 Source Program Attribution report section for each applicable program. However, you must first load the source mapping data. For details on loading source mapping data, refer to Chapter 11, "Source program mapping," on page 637. Each P01 selection line displays the name of the source mapped program.

```
File View Navigate Help
-----
A02: Request Printed Reports (0464/TSTJOB01)          Row 00031 of 00035
Command ==>>> _____ Scroll ==>>> CSR

Enter / to include a section in the report, blank to exclude the section,
S to include the section and set formatting options. Use UP/DOWN (PF7/PF8)
to scroll the list of report sections. After entering your selection,
press ENTER to generate the report JCL.

Select  Report Section

      /      P01 Source Program Attribution for SAMPFINQ
      7      P01 Source Program Attribution for PFSAMPA
      7      P01 Source Program Attribution for PFSAMPB
      7      P01 Source Program Attribution for PFSAMPC
```

---

## Preparing JCL to print reports or create XML documents

You have the option of manually preparing and submitting your own report JCL. The ISPF report request facility will meet most requirements, but by preparing your own JCL and control statements you can use the full formatting flexibility of the CAZPRINT program.

The following CAZPRINT capabilities that are not available directly by using the ISPF report request facility are available if you prepare your own JCL and control statements:

- Include multiple instances of the same report section in a single report. For example, you can include two instances of C01: CPU Usage by Category in your report. Having multiple instances allows you to sort reports using more than one category. For example, one can be sorted by VALUE (most intense CPU activity at the top) and another sorted by program NAME.
- Include report sections from different measurement files in a single report.
- Customize the sequence in which report sections appear in the report.

The following illustrates an example of JCL and control statements to produce a performance analysis report:

```

//CAZRPT01 JOB (job parameters)
//*
//STEP1 EXEC PGM=CAZPRINT
//STEPLIB DD DISP=SHR,DSN=hlq.SCAZAUTH
//SFILE01 DD DISP=SHR,DSN=measurement.file.name
//CAZLOG DD SYSOUT=*
//PRINT1 DD SYSOUT=*
//PDFFILE DD DISP=SHR,DSN=any.file
//*
/* Instream control statements.
/*
//CAZCTL DD *
*
PROFILE 01 Input=SFILE01
*
SECTION S01 Profile=01
SECTION S02 Profile=01
SECTION S03 Profile=01
SECTION S04 Profile=01
SECTION S05 Profile=01
SECTION S06 Profile=01
SECTION S07 Profile=01
*
SECTION C01 Profile=01
SECTION C02 Profile=01
SECTION C03 Profile=01
SECTION C04 Profile=01
SECTION C05 Profile=01
*
SECTION W01 Profile=01
*
SECTION D01 Profile=01
SECTION D02 Profile=01
SECTION D03 Profile=01
SECTION D04 Profile=01
*
CONVERT Format=PDF DDNAME=PDFFILE
PRINT DDNAME=PRINT1
*
/*

```

The above illustrates JCL and control statements that produce output in both line printer format and in PDF format. A brief explanation of the JCL statements is presented below. Detailed descriptions of each of the DD statements are then presented later in this section. For detailed descriptions of the control statements (ddname CAZCTL) see, "Specifying control statements" on page 667.

### **STEPLIB**

The load library containing Application Performance Analyzer components. This can be omitted if Application Performance Analyzer is installed in a linklist library.

### **SFILE01**

The measurement file.

### **CAZLOG**

Output file for error and informational message.

### **PRINT1**

Output file for the line printer report.

### **PDFFILE**

Output file for the PDF report.

### **CAZCTL**

Control statements.

## The input measurement file

You must provide a DD statement for the file (the “sample file”) containing the Application Performance Analyzer measurement data. You can choose any DD name for this file; the DD name is referred to in a PROFILE control statement. The DSN of the measurement file can be determined by displaying the ISPF report S01: Session Statistics or by entering the “++” line command to the item in the Observation Session List ISPF dialog.

### Multiple measurement files

Typically you will produce a report to analyze data from a single measurement file. Application Performance Analyzer also allows you to produce multiple reports in a single job step. You can even include report sections from separate measurement files in a single report. In either event, you need to specify a separate DD statement and a separate PROFILE control statement for each measurement file.

## The CAZLOG log file

You must supply a DD statement for DD name CAZLOG. Application Performance Analyzer reports any errors or informational messages to this file. Typically, you will route this as a JES file.

## The report output file

If you include a PRINT control statement to produce a line printer format report, you must also supply a DD statement for this output. Typically you will specify a JES output file. If you prefer to write this to a permanent file, specify a FB or FBA file with LRECL=121. If your job step is to produce multiple line printer reports, you must supply a DD statement (and a corresponding PRINT statement) for each one.

## The PDF output file

If you include a CONVERT control statement to produce a report in PDF format, you must also supply a DD statement for this file. This must be a FB, LRECL=80 file. If your job step is to produce multiple PDF reports, you must supply a DD statement (and a corresponding CONVERT statement) for each report.

### Downloading and viewing a PDF file

In order to view or print a PDF file you must perform a file transfer operation to download the file to a PC. When downloading (using IND\$FILE or FTP) be sure to download in binary. Do not specify ASCII translation or CRLF. Once you have downloaded the file you can use any version of the Adobe PDF Viewer (Acrobat) program capable of displaying PDF version 1.3.

## The XML document file

If you include a CONVERT control statement to produce a report in XML document format, you must also supply a DD statement for this file. This must be a FB or VB, LRECL=255 file.

If your job step is to produce multiple XML document files, you must supply a DD statement (and corresponding CONVERT statement) for each document file.

Application Performance Analyzer creates a version 1.0 self-contained XML document using EBCDIC encoding (ebcdic-cp-us/Cp037). See Appendix C, “XML document layout,” on page 817 for a complete description of the XML document.



## Processing and transferring an XML document file

The XML document file containing the report data can be browsed or edited on the mainframe, or transferred to another platform for further processing. When transferring to another platform, appropriate character set translation may be required; including carriage return and line feed characters.

---

## Specifying control statements

The CAZCTL DD statement specifies a file containing a sequence of control statements. These control statements can be included as instream data or the DD statement can allocate a SYSIN-type member. The DD statement and the control statements are mandatory.

### General syntax rules

The syntax rules for control records are as follows:

- An asterisk (\*) in column 1 indicates a comment record.
- Double slashes (//) and any characters to the right are ignored. This can be used to include comment text to the right of the statement text.
- Data in columns 73 to 80 is ignored.
- A statement consists of a verb followed by positional and keyword parameters. The allowable verbs are: PROFILE, SECTION, MAP, CONVERT, PRINT, and DESC. If there are positional parameters, they must be coded before any keyword parameters.
- The verb and the positional and keyword parameters must be separated from each other by a comma and/or at least one space.
- A value containing embedded spaces must be enclosed in quotes.
- A statement can span multiple records, but a single parameter expression must be on a single record.
- Unless otherwise noted, commands are not case sensitive.

### The PROFILE statement

The PROFILE statement specifies a measurement file. The format of the PROFILE statement is shown here:

```
PROFILE nn INPUT=ddn|INPUTDSN=dsn
```

The PROFILE statement requires two parameters. The first mandatory parameter is positional and specifies a numeric value from 01 to 99. This effectively labels the PROFILE statement. There is a special case where multiple PROFILE statements with the same numeric label are specified. This is for Variance reporting and is described below.

In most cases, you will only specify one PROFILE statement and this value will be 01. Specify multiple PROFILE statements if you want to report on input from more than one measurement file in a single CAZPRINT step (or print a Variance report as described below). When you specify more than one PROFILE statement, each must specify a unique value in this parameter.

You must also code either the INPUT or INPUTDSN keyword parameter. The INPUT keyword parameter specifies the DD name of the input measurement file. There must be a corresponding DD statement in the JCL. The INPUTDSN keyword parameter specifies the dataset name of the input measurement file. In this case, it is not necessary to include a corresponding DD statement in the JCL.

## TYPE keyword for Variance report

To print a Variance report, you need to specify the Tagged measurement files as well as the base measurement file to which they are to be compared. In this case, additional PROFILE statements with the same numeric label are coded, and a TYPE=TAGGED keyword is added. Up to 20 PROFILE statements with TYPE=TAGGED are permitted. An example of two PROFILE statements for Variance reporting is shown below:

```
PROFILE 01 INPUT=SF01E02 TYPE=TAGGED
PROFILE 01 INPUT=SF01E01
```

There must be corresponding DDNAMEs for the two PROFILE INPUT keywords.

## TYPE keyword for WebSphere servant region observations

To print WebSphere servant region observation reports, you must specify the WAS servant region measurement file and the WAS control region measurement file. In this case, additional PROFILE statements with the same numeric label are coded, and a TYPE=(TAGGED,WASS) keyword is added to the WAS servant region measurement file PROFILE statement.

Here is an example of two PROFILE statements for WebSphere servant region measurement reporting:

```
PROFILE 01 INPUT=SF01E01,TYPE=(TAGGED,WASS)
PROFILE 01 INPUT=SF01E02
```

There must be corresponding DDNAMEs for the two PROFILE INPUT keywords.

## The MAP statement

The MAP statement specifies source program mapping information. This statement is required if you want the report to include mapping of addresses to application source statements, with the exception of COBOL v5 DWARF. The MAP statement is not required for COBOL v5 DWARF source mapping.

An example of a MAP statement is shown here:

```
MAP TYPE=L FILE=TEST1.PGM.LISTINGS MEMBER=COBTEST1 PROFILE=01
```

MAP statements are optional and must be placed after their corresponding PROFILE statement(s) and before PRINT or CONVERT statements. Each MAP statement specifies a file that contains information enabling Application Performance Analyzer to map sampled addresses to source program statements.

## MAP statement parameters

**TYPE** This keyword parameter is mandatory and specifies the type of source mapping input data. You must specify one of the following values:

- L** To specify that the input file is a compiler listing.
- S** To specify that the input file is a LANGX SideFile.
- A** To specify that the input file is an assembler ADATA file.
- D** To specify that the input file is a SYSDEBUG file.

**FILE** This keyword parameter is mandatory and specifies the data set name of the file containing source mapping information.

### **MEMBER**

This keyword parameter is optional and specifies the member name of the file. You must include the MEMBER parameter if the FILE parameter specifies a partitioned data set.

### **PROFILE**

This keyword parameter is optional. Specify the profile number here – a numeric value between 01 and 99. The value must match a value specified in the first parameter of a PROFILE statement. If omitted, a value of 01 is assumed.

## **The SECTION statement**

The SECTION statement specifies a section to be included in the report. At least one SECTION statement is required. SECTION statements must be placed after their corresponding PROFILE statement(s) and before PRINT or CONVERT statements. An example of a SECTION statement is shown here:

```
SECTION C01 PROFILE=01 Levels=9 Minimum=2.5 MLD=Y
```

The above example specifies that the C01 section (CPU Analysis by Category) be included in the report. PROFILE=01 refers to the PROFILE statement that specifies the measurement file from which the report section is to be produced.

Each SECTION statement can specify common parameters (those that apply to all report sections) and section-specific parameters (those that apply to specific section types). The common parameters are described here. Descriptions of the section-specific parameters are presented in “Report SECTION descriptions” on page 671.

### **SECTION statement common parameters**

#### **Section code**

This is the first (and only) positional parameter and is mandatory. It specifies a code identifying the type of report section. It is always 3 characters in length. The first character is alphabetic and the second and third characters are numeric.

#### **PROFILE**

This keyword parameter is optional. Specify the profile number here – a numeric value between 01 and 99. The value must match a value specified in the first parameter of a PROFILE statement. If omitted, a value of 01 is assumed. By referring to a PROFILE statement, this parameter specifies the measurement file from which the report section is to be built.

## **The PRINT statement**

The PRINT statement tells CAZPRINT to write the report in conventional line printer format – a sequential file with ANSI carriage control characters. The report will contain each of the sections specified in SECTION statements. The sections are arranged in the report in the same sequence in which the SECTION statements appeared.

An example of a PRINT statement is shown here:

```
PRINT DDNAME=PRINT1 MLD=N
```

## **PRINT statement parameters**

### **DDNAME**

The DDNAME keyword parameter is mandatory. This specifies the DD name for the report output. A corresponding DD statement must be provided in the JCL.

### **LANG**

The LANG keyword parameter is optional. If omitted it defaults to ENU to indicate the reports are to be created in the English language. Other acceptable values are JPN for Japanese and KOR for Korean.

**MLD** The MLD keyword parameter is optional, if omitted it defaults to Y. This specifies whether or not Multi-Line Descriptions should be printed (Y=Yes, N=No). This is similar to the PREF option in Application Performance Analyzer ISPF: "Show long descriptions on multiple lines," and when generating JCL with Application Performance Analyzer ISPF, the PREF setting will be used to set MLD.

## **The CONVERT statement**

A CONVERT statement can be specified instead of or in addition to a PRINT statement. Like PRINT, CONVERT tells CAZPRINT to write the report and specifies the output destination. Instead of writing the report in conventional line printer format, the CONVERT statement creates a report file in an alternate format; either PDF or XML. When XML is specified, a PRINT statement cannot be included in the job step. You cannot include a CONVERT statement for PDF and a CONVERT statement for XML in the same job step.

Two examples of CONVERT statements are shown here.

```
CONVERT DDNAME=PDF1 FORMAT=PDF MLD=N  
CONVERT DDNAME=XML1 FORMAT=XML LANG=ENU MLD=N
```

## **CONVERT statement parameters**

### **DDNAME**

This mandatory parameter specifies the DD name of a file to which the converted report is to be written. A corresponding DD statement must be included in the JCL. When requesting a PDF, the file must be sequential, in FB format with 80 byte records. When requesting an XML document, the file must be sequential, in FB or VB format with 255 byte records.

### **FORMAT**

This mandatory parameter specifies the format to which the report is to be converted. It must specify PDF or XML.

### **LANG**

The LANG keyword parameter is optional. If omitted it defaults to ENU to indicate the reports are to be created in the English language. Other acceptable values for PDF files are JPN for Japanese and KOR for Korean. ENU is the only acceptable value for XML documents.

**MLD** The MLD keyword parameter is optional, if omitted it defaults to Y. This specifies whether or not multi-line descriptions should be printed (Y=Yes, N=No). This is similar to the PREF option in Application Performance Analyzer ISPF: "Show long descriptions on multiple lines," and when generating JCL with Application Performance Analyzer ISPF, the PREF setting will be used to set MLD.

## The DESC Statement

The DESC statement tells CAZPRINT to change the observation description in the printed reports.

An example of a DESC statement is shown here:

```
DESC= "Description updated for printed report"
```

---

## Reports in PDF format

Application Performance Analyzer can produce a report in the form of a PDF (Portable Document Format) file. On the mainframe, this is written to a sequential file with fixed-length 80 byte records. To view or print the file you will need to download it to a PC using either IND\$FILE file transfer or FTP. No data conversion is required, so be sure to specify a binary file transfer. The content in an Application Performance Analyzer PDF report is essentially the same as a corresponding SYSOUT report. However, PDF's advanced formatting capabilities make this format more readable than a SYSOUT report.

---

## Reports in XML document format

Application Performance Analyzer can produce an XML (Extensible Markup Language) document file containing the selected report information in the English language only. On z/OS, this is written to a sequential file with fixed or variable length 255 byte records. It is encoded in EDBCIC (ebcdic-cp-us/Cp037) and may be viewed, edited, or processed on the mainframe. If the XML document file is required on another platform, it may need character set translation, including carriage return and line feed characters. After the document file has been transferred to the target platform, ensure that the encoding attribute on the XML declaration is changed to the appropriate value. For example, when downloading the file to a Windows platform, using IND\$FILE file transfer, the ASCII and CRLF parameters must be specified. After the file transfer is complete, the encoding attribute on the XML declaration must be changed to UTF-8 in the Windows document file.

The XML file is a stand-alone document and has been declared as such. For the most part, the XML elements and tags can be related to their corresponding report fields by the element names and structure. For a complete description of the XML document, see Appendix C, "XML document layout," on page 817.

---

## Report SECTION descriptions

This section describes the report sections that you can include in a performance analysis report and the parameters that can be specified on the corresponding SECTION statements.

### SECTION statement parameter summary

Each section requires a SECTION statement. SECTION statements for some report sections accept (or require) certain keyword parameters that allow you to set formatting options. The following table summarizes the available report sections, their parameters, and their default values. The Sequence parameter accepts different values, depending on the report section. For each report section, the acceptable values are listed, with the default value listed first.

These defaults only apply until you change them by selecting the report in A02: Request Printed Reports, after that Application Performance Analyzer will “remember” your selections.

Report section	Section ID	Parameters and default values
Measurement Profile	S01	
Load Module Attributes	S02	Sequence=NAME/ADDRESS/ SIZE/LIBRARY OmitESD=N OmitNUC=N OmitPLPA=N Omitdup=N
Load Module Summary	S03	Sequence=NAME/ADDRESS/ SIZE/LIBRARY Omitdup=N
TCB Summary	S04	
Memory Usage Timeline	S05	Intervals=45
Data Space Usage Timeline	S06	Intervals=45
TCB Execution Summary	S07	
Processor Utilization Summary	S08	
Measurement Analysis	S09	
Observation Session Messages	S10	Levels=3 MsgD=Y MsgE=Y MsgI=Y MsgW=Y
CPU Usage by Category	C01	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y Minimum=0.00 MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y
CPU Usage by Module	C02	Levels=9 Sequence=VALUE/NAME Minimum=0.00 MLD=Y
CPU Usage by Code Slice	C03	Levels=9 Sequence=VALUE/ ADDRESS/LOCATION SliceSize=64 Minimum=0.00
CPU Usage Timeline	C04	Intervals=45

Report section	Section ID	Parameters and default values
CPU Usage Task/Category	C05	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y ShowInact=Y MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y
CPU Usage Task/Module	C06	Levels=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
CPU Usage by Procedure	C07	Sequence=VALUE/NAME OmitCPU=N
CPU Usage Referred Attribution	C08	Levels=9 Sequence=VALUE/NAME MLD=Y SysView=N
CPU Usage by PSW/ObjCode	C09	Levels=2 Sequence=VALUE/ADDRESS
CPU Usage by Natural Program	C10	Levels=9 Sequence=VALUE/NAME
DASD Usage by Device	D01	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DASD Usage by DDNAME	D02	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DASD Usage by Dataset	D03	Levels=9 Sequence=VALUE/NAME Minimum=0.00
Dataset Attributes	D04	Sequence=FILE/DSN
DASD EXCP Summary	D05	Sequence=VALUE/NAME OmitEXCP=N
DASD VSAM Statistics	D06	Sequence=VALUE/NAME OmitEXCP=N
DASD Activity Timeline	D07	Sequence=VALUE/NAME OmitEXCP=N
DASD I/O Wait Time	D08	Levels=9 Sequence=VALUE/NAME MLD=Y
VSAM Buffer Pool Usage	D09	

Report section	Section ID	Parameters and default values
Wait Time by Task/Category	W01	Level s=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y ShowInact=Y MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y
Wait Time by Task/Module	W02	Level s=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
Wait Time Referred Attribution	W03	Level s=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
Wait Time by Task ENQ/RESERVE	W04	Level s=9 Sequence=VALUE/NAME MLD=Y
Wait Time by Tape DDNAME	W05	Sequence=VALUE/NAME
IMS Measurement Profile	I01	
IMS DL/I Call Timeline	I02	
IMS Transaction Timeline	I03	Level s=9
IMS Txn Activity Timeline	I04	Sequence=VALUE/NAME
IMS CPU Usage by PSB	I05	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS CPU Usage by Transaction	I06	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS CPU Usage by DL/I Call	I07	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS WAIT Time by PSB	I08	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS WAIT Time by Transaction	I09	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS WAIT Time by DL/I Call	I10	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS DL/I Activity by PSB	I11	Level s=9 Sequence=VALUE/NAME MLD=Y
IMS DL/I Activity by Txn	I12	Level s=9 Sequence=VALUE/NAME MLD=Y



Report section	Section ID	Parameters and default values
IMS DL/I Activity by DL/I Call	I13	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS PSB/PCB Attributes	I14	
IMS DL/I Call Attributes	I15	
IMS Transaction Service Times	I16	
IMS Transaction DL/I Counts	I17	Levels=9
IMS CPU/Svc Time by DL/I Call	I18	Sequence=VALUE/NAME
IMS CPU/Svc Time by PSB	I19	Sequence=VALUE/NAME
IMS CPU/Svc Time by Txn	I20	Sequence=VALUE/NAME
IMS CPU/Svc Time by PCB	I21	Sequence=VALUE/NAME
IMS Region Transaction Summary	I22	Sequence=NAME/VALUE
CICS Session Statistics	E01	
CICS CPU and Use Counts by Pgm	E02	Sequence=VALUE/NAME/COUNT
CICS CPU Usage by Txn	E03	Levels=9 Sequence=VALUE/NAME Minimum=0.00 MLD=Y
CICS Mean Service Time by Txn	E04	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Txn	E05	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Service Time by Task ID	E06	Levels=1 Sequence=VALUE/NAME MLD=Y
CICS WAIT by Txn	E07	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by Trm	E08	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Trm	E09	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by user ID	E10	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by user ID	E11	Levels=9 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
CICS CPU/Service Time by Txn	E12	Level s=2 Sequence=VALUE/NAME
CICS Mean Service Time by Txn (for multiple CICS address spaces)	X01	Level s=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Txn (for multiple CICS address spaces)	X02	Level s=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by Term (for multiple CICS address spaces)	X03	Level s=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Term (for multiple CICS address spaces)	X04	Level s=9 Sequence=VALUE/NAME MLD=Y
Combined DB2 IMS MQ Timeline	X05	Level s=9 Sequence=VALUE/DURATION MLD=Y
DB2 Measurement Profile	F01	
DB2 SQL Activity Timeline	F02	Level s=9 Sequence=THREAD/CPU/ DURATION
DB2 SQL Activity by DBRM	F03	Level s=9 Sequence=VALUE/NAME Minimum=0.00
DB2 SQL Activity by Statement	F04	Level s=9 Sequence=VALUE/NAME Minimum=0.00
DB2 SQL Activity by Plan	F05	Level s=9 Sequence=VALUE Minimum=0.00
DB2 SQL Statement Attributes	F06	
DB2 SQL Wait Time by DBRM	F07	Level s=9 Sequence=VALUE/NAME OfTotal=Y
DB2 SQL Wait Time by Statement	F08	Level s=9 Sequence=VALUE/NAME OfTotal=Y
DB2 SQL Wait Time by Plan	F09	Level s=9 Sequence=VALUE OfTotal=Y
DB2 SQL CPU/Svc Time by DBRM	F10	Level s=1 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Stmt	F11	Level s=2 Sequence=VALUE/NAME/DURATION posSQL=Y negSQL=Y stmtSQL=N stmtPct=N

Report section	Section ID	Parameters and default values
DB2 SQL CPU/Svc Time by Plan	F12	Levels=2 Sequence=VALUE/DURATION stmtPct=N
DB2 SQL Threads Analysis	F13	
DB2 CPU by Plan/Stored Proc	F14	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y MLD=Y
DB2 SQL CPU/Svc Time by Rq Loc	F15	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Enclav	F16	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Corrid	F17	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Wkstn	F18	Levels=2 Sequence=VALUE/NAME/DURATION stmtPct=N
DB2 SQL CPU/Svc Time by EndUsr	F19	Levels=2 Sequence=VALUE/NAME/DURATION stmtPct=N
DB2 Class 3 Wait Times	F20	
Coupling Facility Summary	G01	
Coupling Facility Mean Times	G02	Levels=9
Coupling Facility Total Times	G03	Levels=9
K01 CPU SRB Usage by SRB Type	K01	Levels=9 Sequence=VALUE/NAME TCBSRB=Y
K02 CPU SRB Usage by PSW/ObjCode	K02	Levels=9 Sequence=VALUE/ADDRESS
MQSeries Activity Summary	Q01	
MQSeries CPU Usage by Queue	Q02	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries CPU Usage by Request	Q03	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries CPU Usage by Txn	Q04	Levels=9 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
MQSeries Serv Time by Queue	Q05	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Serv Time by Request	Q06	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Serv Time by Txn	Q07	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Queue	Q08	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Request	Q09	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Txn	Q10	Levels=9 Sequence=VALUE/NAME MLD=Y
MQ+ Activity Timeline	Q11	Levels=9 Sequence=VALUE/DURATION MLD=Y
MQ+ CPU/SVC Time by Queue	Q12	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
MQ+ CPU/SVC Time by Request	Q13	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
MQ+ CPU/SVC Time by Txn	Q14	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
Source Program Attribution	P01	Program=pgmname (no default value) AdjLines=4 AllSource=N AsmObj=Y Header=Y Percent=N
Java Summary/Attributes	J01	
Java Heap Usage Timeline	J02	Intervals=15 Totals=Y
Java CPU Usage by Thread	J03	Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Package	J04	Levels=2 Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Class	J05	Levels=2 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
Java CPU Usage by Method	J06	Levels=2 Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Call Path	J07	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Package	J09	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Class	J10	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Method	J11	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Call Path	J12	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Package	J14	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Class	J15	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Method	J16	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Call Path	J17	Levels=2 Sequence=VALUE/NAME MLD=Y
HFS Service Time by Path Name	H01	Sequence=VALUE/FILEID/PATHNAME Minimum=0.00 MLD=Y
HFS Service Time by Device	H02	Levels=2 Sequence=VALUE/DEVID/DEVICE Minimum=0.00 MLD=Y
HFS File Activity	H03	Sequence=VALUE/FILEID/PATHNAME OmitEXCP=N
HFS File Attributes	H04	
HFS Device Activity	H05	Sequence=VALUE/DEVID/DEVICE OmitEXCP=N
HFS Device Attributes	H06	
HFS Activity Timeline	H07	Sequence=VALUE/FILEID/PATHNAME OmitEXCP=N
HFS Wait Time by Path Name	H08	Sequence=VALUE/FILEID/PATHNAME Minimum=0.00 MLD=Y

Report section	Section ID	Parameters and default values
HFS Wait Time by Device	H09	Levels=2 Sequence=VALUE/DEVID/DEVICE Minimum=0.00 MLD=Y
HFS Service Time by Request	H10	Levels=2 Sequence=VALUE/REQID/REQUEST Minimum=0.00 MLD=Y
HFS Wait Time by Request	H11	Levels=2 Sequence=VALUE/REQID/REQUEST Minimum=0.00 MLD=Y
Measurement Variance Summary	V01	
CICS Variance Summary	V02	
DB2 Variance Summary	V03	
IMS Variance Summary	V04	
WAS Summary	B01	
WAS Activity	B02	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Activity by Origin	B03	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Activity by Servant	B04	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS EJB Activity	B05	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS EJB Activity by Origin	B06	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS EJB Activity by Servant	B07	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP Activity	B08	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP by Origin	B09	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP by Servant	B10	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS/CICS Calls	B11	Levels=9 Sequence=VALUE/NAME/SERVICE
WAS/DB2 Calls	B12	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y

Report section	Section ID	Parameters and default values
Async Work Requests	B13	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
Async Work by Work Mgr	B14	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
Async Work by Servant	B15	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound Requests	B16	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound by Origin	B17	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound by Servant	B18	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Outbound Requests	B19	Levels=9 Sequence= VALUE/SERVICE MLD=Y
WOLA Outbound by Register	B20	Levels=9 Sequence= VALUE/SERVICE MLD=Y
WOLA Outbound by Servant	B21	Levels=9 Sequence= VALUE/SERVICE MLD=Y

## SECTION parameter descriptions

The SECTION statement parameters are described in the following list. They are presented in alphabetical keyword sequence.

**ADABAS** This parameter applies to report sections that can attribute measured system activity to Adabas while it is processing Adabas calls. Specify Y to display measurements in routines that were processing Adabas calls in a separate ADABAS category.

### AdjLines

Specifies the number of adjacent source lines. This applies to the reporting of source program lines and attribution of system activity to source statements. Source statements for which system activity is measured will be reported, but those statements for which no activity is measured are normally omitted. The value of this parameter specifies the number of source lines immediately preceding and following any line with measured activity that are also to be included in the report. This helps provide some context for isolated source lines with measured activity.

### A11Source

This applies to the reporting of source program lines. A value of Y specifies that all source lines are to be shown in the report, including those for which no system activity is attributed. A value of Y in this parameter overrides any value specified in the AdjLines parameter. Specify N to control which lines are reported using the AdjLines parameter.

**AsmObj**

This applies to the reporting of source program lines for an assembler program. Specify Y to include object code (from the assembly listing) in each source line. Specify N to omit object code.

**Datamg**

This parameter applies to report sections that attribute measured system activity to the data management processing category. Specify Y to display measurements in routines that were servicing data management requests in a separate DATAMG category. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

**DPAGroup**

This parameter applies to report sections that attribute measured system activity to program categories. This attribution can be done to Groups or Subgroups. A group is a higher level (more inclusive) categorization than a subgroup. For example, activity in DB2 modules can be attributed to the group "DB2 Subsystem" or, alternatively, to subgroups such as "Buffer Manager," "Call Attachment Facility," "Data Manager," etc. Specify DPAGroup=Y to attribute to group and DPAGroup=N to attribute to subgroup.

**Header**

This applies to the P01 source program report. A value of Y specifies that detailed information about the source program is to appear in the heading area in each page in the report section. This information includes: source mapping file name and type, compile date and time, compiler product and version.

**Intervals**

This applies to "timeline" report sections in which measurement information is reported in equal time intervals. It specifies the number of intervals into which the report section is to be divided, which is generally, one line per interval. The value must be between 2 and 256.

**Levels**

This applies to report sections in which lines are arranged in a hierarchy. The value, a single numeric digit: 0 to 9, specifies the number of hierarchical levels to be included in the report. These are equivalent to the ISPF report line items in which the "+" line command is used to expand the hierarchy.

**Minimum**

This applies to report sections that allow you to exclude measurements of objects when those measurement values are below the specified minimum. The unit is percentage and is expressed as two digits, followed by an optional decimal point and up to two decimal places.

**MLD**

This applies to report sections where DPA descriptions are reported. The MLD=Y parm is used to specify that Multi Line Descriptions should be printed, so that you can see all of the description text. MLD=N specifies that Multi Line Descriptions should not be printed, in which case only one line per module/csect will be printed, and the description will be truncated if it does not fit on one line.

**MsgD**

This applies to report sections that display Application Performance Analyzer messages. Specify Y to display diagnostic level messages.



- MsgE** This applies to report sections that display Application Performance Analyzer messages. Specify Y to display severe level and error level messages.
- MsgI** This applies to report sections that display Application Performance Analyzer messages. Specify Y to display informational level messages.
- MsgW** This applies to report sections that display Application Performance Analyzer messages. Specify Y to display warning level messages.
- negSQL** This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to include SQL statements that end in a negative SQLCODE.
- Oftotal** This applies to report sections in which SQL wait time is reported. Specify Y to quantify wait time as a percentage of total measurement interval. Specify N to quantify as a percentage of the SQL service time.
- OmitCPU** This parameter applies to reports where CPU activity is attributed to program procedures. Specify Y to exclude procedures for which no CPU activity was measured, N to include them.
- Omitdup** This parameter applies to report sections in which load modules are reported. A value of Y specifies that modules that have been reloaded at a new address, but have the same name and size to be reported only once.
- OmitESD** This applies to report sections in which detailed information about load modules is reported. A value of Y specifies that ESD (External Symbol Dictionary) information is not to be reported.
- OmitEXCP** This applies to report sections in which the number of EXCPs or read/write count is reported for files or devices. Specify Y to exclude files or devices for which no EXCPs or read/writes were counted, or specify N to include them.
- OmitNUC** This applies to report sections in which load modules are reported. A value of Y specifies that Nucleus modules are to be excluded from the report.
- OmitPLPA** This applies to report sections in which load modules are reported. A value of Y specifies that PLPA (Pageable Link Pack Area) modules are to be excluded from the report.
- Percent** This applies to the source mapping report section - P01. Specify Y to display the values for the source statement as a percentage, or specify N to display values as a count. This is only applicable when source mapping a report that shows percentages.
- posSQL** This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to include SQL statements that end successfully; that is, with a zero or positive SQLCODE.
- Program** This applies to the source mapping report section (P01). It specifies the name of the source program to reported.

**Pseudo**

This applies to the source mapping report section - P01. Specify Y to display C/C++ pseudo-assembly.

**Sequence**

This specifies the sequence in which items in the report are to be sorted. Possible values for this parameter are listed below. Not all values are appropriate for each report.

- ADDRESS to sort in ascending sequence by load module address
- CPU to sort in descending sequence by SQL CPU time
- DSN to sort in ascending sequence by dataset name
- DURATION to sort in descending sequence by SQL call duration or service time
- FILE to sort in ascending sequence by DDName
- LIBRARY/LOADLIB to sort in ascending sequence by load library name
- LOCATION to sort in ascending sequence by the address of the start of the code slice in the form of csect or module plus offset
- NAME to sort in ascending sequence by item name
- SERVICE to sort in descending sequence by service time
- SIZE to sort in ascending sequence by load module size
- THREAD to sort chronologically by DB2 thread
- VALUE to sort in descending sequence by amount of measured activity

**ShowDB2**

This parameter applies to report sections that can attribute measured system activity to DB2 while it is processing SQL requests. Specify Y to display measurements in routines that were processing SQL requests in a separate DB2SQL category.

**ShowIMS**

This parameter applies to report sections that can attribute measured system activity to IMS while it is processing DLI calls. Specify Y to display measurements in routines that were processing DLI calls in a separate IMSDLI category.

**ShowInact**

This parameter is generally applicable to report sections that present information by TCB (Task). A value of Y (normally the default) specifies that information for inactive tasks is to be included in the report. An inactive task is one which was observed to be in a wait state for the full duration of the observation session.

**SliceSize**

This parameter applies to report sections that present information by code slice (block of storage containing object code). Use this parameter to vary the code slice size. A code slice size value must be between 4 and 99992 and must be an even value that is divisible by 4.

**stmtPct**

This parameter applies to DB2 reports that display mean times. When 'Y' is specified, the mean times are replaced with the percent of total used.

**stmtSQL**

This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to consolidate dynamic SQL statements by statement number, ignoring differences in SQL statement text. When 'Y' is specified,

one line is displayed per statement number regardless of the contents of the SQL statement text. When 'N' is specified, one line is displayed for each unique dynamic SQL statement.

**SysView**

This applies to the CPU usage referred attribution report to indicate how the data is to be displayed. When 'N' is specified, data is referred back to the application modules. When 'Y' is specified, data is referred back to the system modules.

**TCBSRB** This parameter applies to the CPU SRB Usage by SRB Type report. When 'Y' is specified, CPU percentages are calculated as a percentage of TCB and SRB counts. When 'N' is specified, CPU percentages are calculated as a percentage of SRB counts only.

**Totals** This applies to report sections where total values can be displayed graphically, in addition to usage values. Specify Y to report on usage and total values.



---

## Chapter 13. Batch interface commands

Application Performance Analyzer has a command language which allows you to submit requests using JCL. The command language can be used to create the same types of requests available in Application Performance Analyzer/ISPF.

Application Performance Analyzer also provides a batch import program to load the sample file of a completed observation request, or a hierarchy of requests created by an EXPH command. This program can be used as an alternative to the IMPORT command.

For information about ...	See ...
General syntax, types of commands and examples	"Command syntax"
Command summary diagram	"Command summary diagram" on page 688
Setting up the JCL	"Sample JCL" on page 690
Coding the NEW command, with keyword descriptions and examples	"NEW" on page 695
Coding the TNEW command	"TNEW" on page 707
Coding the DELETE command	"DELETE" on page 707
Coding the KEEP command	"KEEP" on page 708
Coding the CANCEL command	"CANCEL" on page 708
Batch Import command	"Batch import" on page 708

---

### Command syntax

The batch interface command format consists of a single high level command keyword (NEW, TNEW, DELETE, KEEP, or CANCEL) followed by a series of keywords and parameters in the format: KEYWORD=(parameter1, parameter2,...).

If there is only one parameter specified for a keyword, then the parentheses "(...)" are optional. For example, DURATION=120 and DURATION=(120) are both acceptable.

When a list of parameters is specified, the parentheses "(...)" are mandatory. For example, FEATURES=(CICS,IMS,DB2).

A semicolon must be present at the end of the command string.

### Example of NEW command

The following example create a new observation request. It requests that job CAZTEST01 be measured for 60 seconds and 10000 samples, with the IMS and DB2 features turned on.

```
NEW JOBNAME=CAZTEST01
ACTIVE=NO
SAMPLES=10000 DURATION=60
FEATURES=(IMS,DB2)
;
```

## Example of TNEW command

The following example creates a new threshold observation request. It requests that the second step in job TSTJOB01 be measured for 60 seconds and 10000 samples. The measurement starts only when the CPU time for step 2 in TSTJOB01 exceeds 30 seconds and the EXCP count exceeds 20000.

```
TNEW JOBNAME=TSTJOB01
ACTIVE=NO
STEP=(2)
SAMPLES=10000 DURATION=60
TMSEL=("CPU=30 EXCP=20000")
;
```

## Example of DELETE command

The following example deletes observation 0985.

```
DELETE REQNUM=0985
;
```

## Example of KEEP command

The following example applies the KEEP command to observation 0985. This means the request will be kept until it is manually deleted, no expiration date will apply.

```
KEEP REQNUM=0985
;
```

## Example of CANCEL command


The following example cancels active observation 0985.


```
CANCEL REQNUM=0985
;
```

---


## Command summary diagram

This diagram shows a summary of the parameters allowed in a NEW command, they are described in detail on the following pages.

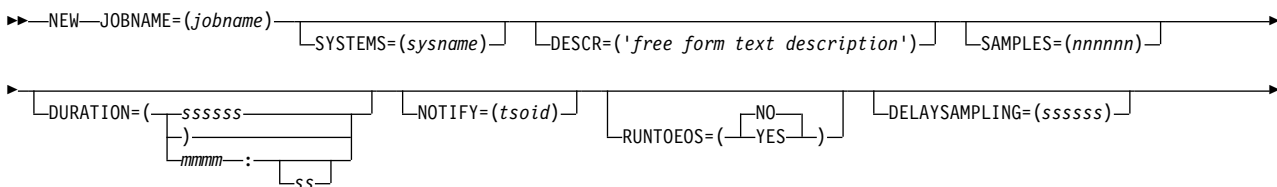

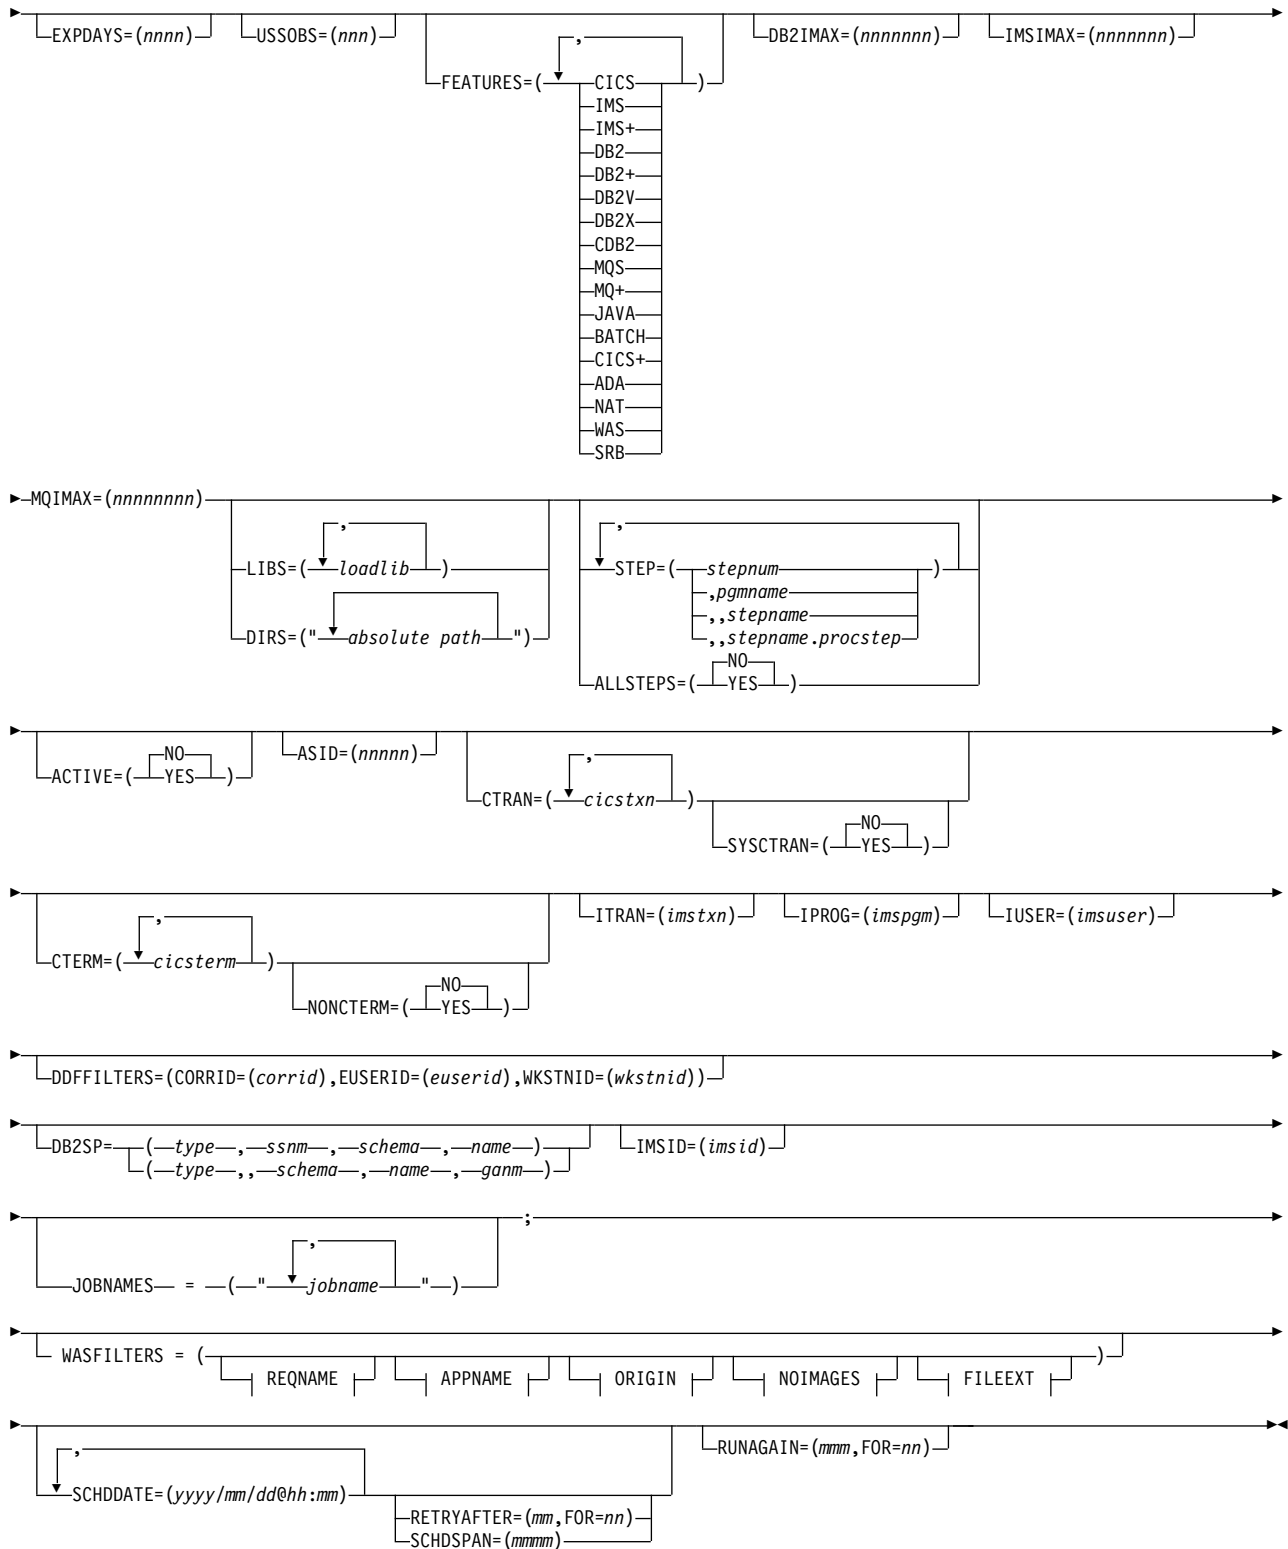

**REQNAME:**



### APPNAME:

```
|_____|  
| APPNAME = * _____ , |  
| | _____ | |  
| | appname | |  
|_____|
```

### ORIGIN:

```
|_____|  
| ORIGIN = ( ( H _____ ) , * _____ ) , |  
| | I | | | _____ | |  
| | J | | | origin | |  
|_____|
```

### NOIMAGES:

```
|_____|  
| NOIMAGES = NO _____ , |  
| | YES | |  
|_____|
```

### FILEEXT:

```
|_____|  
| FILEEXT = ' _____ ' |  
| | extension | |  
|_____|
```

### SAMPDSN:

```
|_____|  
| SAMPDSN=(dsn, REPLACE=Y|N) |  
|_____|
```

---

## Sample JCL

The following illustrates an example of how to set up the Batch Interface JCL and create a basic measurement request. There is a sample template of this JCL supplied in *hlq.SCAZSAMP* in member CAZBATCH.

```
//SAMPJOB1 JOB (job parameters)  
//*  
//CAZBATCH EXEC PGM=CAZBATCH,PARM='STCID=CAZ0'  
//STEPLIB DD DISP=SHR,DSN=hlq.SCAZAUTH  
//SYSPRINT DD SYSOUT=*  
//SYSIN DD *  
NEW JOBNAME=APPJOB01  
ACTIVE=NO  
SAMPLES=5000 DURATION=30  
DESCR='Sample request for APPJOB01'  
;  
/*  
//
```

The above example uses the Application Performance Analyzer started task named CAZ0 as specified on the EXEC statement as PARM='STCID=CAZ0'. You must specify



your Application Performance Analyzer started task name here. This parameter can be omitted if only one instance of Application Performance Analyzer is running on your image.

In STEPLIB, replace *hlq* with the high-level qualifier used for Application Performance Analyzer in your installation.

The commands in the above example create a NEW request to measure job APPJOB01, which is not yet active, for 5000 samples with a duration of 30 seconds. A user composed description is also specified.

---

## Using the API to submit a command

This section describes how to code a call to the Application Performance Analyzer command API in an application program. The command API can be called from Assembler, COBOL, PL/I, C or C++ programs. Sample programs for each language are shipped in *hlq.SCAZSAMP*.

The sample program names for each language are:

- Assembler: CAZAPASM
- C: CAZAPC
- C++: CAZAPCC
- COBOL: CAZAPCOB
- PL/I: CAZAPPLI

**Note:**

1. You must modify the sample code to contain the started task and the system parameters.
2. You must modify the COBOL sample code CAZAPCOB.

## Environment

**Authorization**

Problem state key 8, Supervisor state any key

**Dispatchable unit mode**

TCB

**Cross memory mode**

PASN = SASN = HASN

**Amode**

24-bit, 31-bit, or 64-bit

**ASC mode**

Primary or AR

**Interrupt status**

Enabled for I/O and external interrupts

**Locks** No locks held

**Control parameters**

Must be in the primary address space, key 8, and below the bar

**Error recovery**

The API does not provide error recovery

## Input registers

Upon entry to CAZAPI01, the general purpose registers (GPRs) contain:

Register	Contents
1	Address of a standard CALL parameter list.
13	Address of a standard register 72-byte save area that must be addressable in primary mode and below the bar.
14	Return address.
15	Entry address of CAZAPI01.

## Output registers

When control returns to the caller, the general purpose registers (GPRs) contain:

Register	Contents
0	Reason code.
1	Used as a work register by CAZAPA01.
2-13	Unchanged.
14	Used as a work register by CAZAPI01.
15	Return code.

When control returns to the caller, the access registers (ARs) contain:

Register	Contents
0	Used as a work register by CAZAPI01.
1-15	Unchanged.

## Syntax

```
CALL CAZAPI01, (Command,  
Reply,  
STCID,  
return_code,  
reason_code,  
) ,VL
```

It is recommended that the calling program pre-fetch CAZAPI01 instead of including the module in your load module during the link-edit step. This way you can avoid relinking your load module if a newer version of CAZAPI01 becomes available.

## Parameters

### Command

Specifies a 2-byte length field followed by the input command string to be submitted to Application Performance Analyzer. The length field describes the length of the command string only; it does not include the length of this length field.

### Reply

Specifies a 2-byte length field followed by a buffer used by CAZAPI01 to return one or more information/error messages describing the result of

processing the command. The length field must contain the maximum length of this buffer; it does not include the length of this length field. It is recommended that the buffer be a minimum of 512 bytes long and be initialized to nulls so that the caller can easily determine whether messages have been returned or not.

If messages are returned then each message will be terminated by a single null character, the last message will be terminated by two consecutive null characters. The length field will be updated to contain the length of the messages including all null characters.

**STCID**

Specifies a 4-byte field that contains the Application Performance Analyzer STCID to which the command will be submitted. The STCID must be left justified and blank padded.

If the first byte of this field is blank or null then CAZAPI01 will attempt to connect to the currently executing Application Performance Analyzer started task. If more than one Application Performance Analyzer STC is active the request will fail.

**return\_code**

Specifies a 4-byte field to contain the return code.

**reason\_code**

Specifies a 4-byte field to contain the reason code.

**VL** Must be coded and causes the high-order bit of the last parameter address to set to 1.

**Return codes**

When CAZAPI01 returns control to your program, GPR 15 and *return\_code* contain a return code. The following list identifies return codes in hexadecimal format and describes what each means:

- 00 The operation was successful.
- 08 The operation failed because of an error. (Refer to reason code for an explanation of the error.)

**Reason codes**

When CAZAPI01 returns control to your program, GPR 0 and *reason\_code* contain a reason code. The following table identifies reason codes in hexadecimal and decimal formats and describes what each means:

*Table 11. Reason codes*

Hexadecimal	Decimal	Explanation
00	00	Not applicable.
04	04	Caller is not running in TCB mode.
08	08	Caller's PASN and SASN are not equal.
0C	12	Caller is not running with DAT-on.
10	16	Caller is running disabled.
14	20	Caller is in problem state and not key 8.

Table 11. Reason codes (continued)

Hexadecimal	Decimal	Explanation
18	24	Caller is not in primary or AR ASC modes.
1C	28	The STCID field contained a null or blank first character, CAZAPI01 attempted to access the currently executing Application Performance Analyzer STC but found more than one STC executing.
20	32	The specified STCID was not defined to this system.
24	36	There are no Application Performance Analyzer STCs active on this system.
28	40	The specified STCID is not currently active on this system.
2C	44	Application Performance Analyzer's name token was not created. This indicates that no Application Performance Analyzer STC has ever been started on this system since the last IPL.
30	48	Command string contains an unrecognized command verb. Currently, only the CANCEL, DELETE, KEEP, NEW and TNEW commands are allowed to be submitted via this API.
34	52	The Application Performance Analyzer STC detected an error while processing the command. Refer to the message(s) returned in the Reply buffer for more information.
38	56	The Application Performance Analyzer STC command interface has abended. Depending on the error, an SVC dump may have been created. If an SVC dump was not produced then, the interface's error recovery will have percolated the abend up to the next error handler in the caller's address space.

Table 11. Reason codes (continued)

Hexadecimal	Decimal	Explanation
3C	60	Registration has been denied for Application Performance Analyzer. See message CAZ3969S on <i>Message Guide</i> for details. This message returned in the API caller's reply area.

## Abend code

CAZAPI01 will produce a user abend code: 4085 in the event of an recoverable error. The following table identifies abend reason codes in hexadecimal and decimal formats and explains the reason for the abend:

Table 12. Abend code

Hexadecimal	Decimal	Explanation
FA0	4000	The input parameter pointer was zero.
FA4	4004	Either the input command pointer was zero or the length field contained zeros.
FA8	4008	Either the reply command pointer was zero or the length field contained zeros.
FAC	4012	The STCID pointer was zero.
FB0	4016	The return_code pointer was zero.
FB4	4020	The reason_code pointer was zero.
FB8	4024	The VL bit was turned on prior to the last parameter.
FAC	4028	The VL bit was not turned on on the last parameter.
FC0	4032	Internal error. Contact product support.
FC4	4036	Internal error. Contact product support.

---

## Command descriptions

### NEW

The NEW command is used to create a new Observation Request.

#### NEW

Mandatory.

Indicates that this is a NEW request.

#### JOBNAME

Mandatory.

Specifies the name of the job (or started task or TSO user) to be measured.

#### **Creating multi-job measurements (%)**

You can also specify a special pattern character of percent sign "%". This acts as a place holder for zero or more characters in the name. It can be placed anywhere in the name except as the ninth character in an eight character jobname. A patterned name indicates that you want to measure all active jobs whose jobname matches the pattern. You cannot specify a jobname pattern of "%".

The maximum number of jobs that can be measured from a multi-job request is defined during the installation of Application Performance Analyzer. When this limit is exceeded, Application Performance Analyzer stops creating measurements for this request, and the status of the request is displayed as 'Stoppd'. The measurements that executed (within the limit) are accessible for report viewing under the request. To increase the limit, contact your system programmer.

Example: %MSMPP% causes one sampling request to be created for each active job whose jobname contains "MSMPP".

The ASID keyword is ignored when the jobname specifies a pattern.

The ACTIVE keyword is automatically set to YES when the jobname specifies a pattern.

#### **Measuring a specific DB2 stored procedure or user-defined function**

To measure a specific DB2 stored procedure or user-defined function, use a dash (-) for the JOBNAME. The information identifying the DB2 stored procedure or user-defined function must be supplied in the DB2SP keyword. The following keywords are also accepted; SYSTEMS, DESCR, SAMPLES, DURATION, NOTIFY, EXPDAYS, USSOBS, FEATURES, LIBS, DIRS and DB2IMAX. All other keywords are invalid and will result in an error. This feature is only available when the WLM Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary.

#### **Measuring a specific IMS transaction across multiple MPP regions**

To measure a group of IMS MPP regions that are eligible to schedule a specific IMS transaction code, use a dash (-) for the JOBNAME. The IMS subsystem ID is specified in the IMSID keyword. The transaction code is specified in the ITRAN keyword. The region names are specified in the JOBNAMES keyword. The following keywords are also accepted; SYSTEMS, DESCR, SAMPLES, DURATION, NOTIFY, EXPDAYS, FEATURES, LIBS, and IMSIMAX. All other keywords are invalid and will be ignored or result in an error. This feature is only available when the IMS Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary.

#### **SYSTEMS**

Mandatory within a sysplex.

Specifies a target system within a sysplex. You can also enter an asterisk (\*), in which case the target job is measured on the first system to run it. When an asterisk (\*) is entered, the keyword ACTIVE=YES is invalid. This keyword is invalid in a non-sysplex environment.

Example: SYSTEMS=SYS3

**DESCR**

Optional unless set as mandatory during installation.

Specifies a free form text description for this observation request. The text must be within single quotes, and if mandatory must be a minimum of 8 characters.

Example: DESCR= 'Any user text goes here'

**SAMPLES**

Optional.

If omitted, the default number of samples will be used. Specifies the number of samples to take during the measurement.

Example: SAMPLES=10000

**DURATION**

Optional.

If omitted, the default duration will be used. Specifies the duration of the measurement in seconds.

Example: DURATION=120

**NOTIFY**

Optional.

Specifies a TSO userid to notify when the measurement ends.

Example: NOTIFY=USER01

**RUNTOEOS**

Optional.

Specify YES to indicate that the measurement should continue to run until the job step has completed, even if the target number of observations has been reached.

**DELAYSAMPLING**

Optional.

This indicates that sampling should be delayed for the specified amount of time (in seconds). After the target job step starts, Application Performance Analyzer will delay the start of the measurement for the number of seconds specified.

**EXPDAYS**

Optional.

If omitted the installation default will be used.

Specifies the number of days the measurement data for this observation request should be retained on before being automatically deleted. To keep the measurement data indefinitely, use EXPDAYS=0.

Example: EXPDAYS=30

**USSOBS**

Optional.

Specify the maximum number of spawned address spaces or substeps to measure for a USS observation, up to the maximum defined in the system configuration. The same sampling frequency will be used for each spawned address space or substep. Sampling overhead can be high if several spawned address spaces are running simultaneously.

When this field is specified, the collection of measurements will be grouped under a USS master record on the Observation List panel.

#### **FEATURES**

Optional.

Specifies which data extractors, if any, need to be turned on for this measurement. The data extractor values are: CICS, CICS+, IMS, IMS+, DB2, DB2+, DB2V, DB2X, CDB2, MQS, MQ+, Java, ADA, NAT, WAS, SRB. A list of data extractors is separated by commas.

If your installation has any default extractors set, the FEATURES command will override these. If you need to override default extractors and want to turn all extractors off, specify FEATURES=(BATCH).

Example: FEATURES=(CICS,DB2)

#### **DB2IMAX**

Optional.

Enter the value to limit the number of DB2+ SQL call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the F02 Timeline report to report exact times for all SQL calls. The F02 report will be truncated at the number of calls specified in this field. The DB2+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value cannot exceed the default value specified for DB2IMaxTraceSize during Application Performance Analyzer installation.

Example: DB2IMAX=(10000)

#### **IMSIMAX**

Optional.

Enter the value to limit the number of IMS+ DLI call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the I02 and I03 Timeline reports to report exact times for all DLI calls and IMS transactions. The I02 and I03 reports will be truncated at the number of calls specified in this field. The IMS+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value cannot exceed the default value specified for IMSIMaxTraceSize during Application Performance Analyzer installation.

Example: IMSIMAX=(10000)

#### **MQIMAX**

Optional.

Enter the value to limit the number of MQ+ call interceptions for which full details are written to the sample file. The Q11 MQ+ Activity Timeline report is truncated at the number of calls that is specified in this field. The MQ+ data extractor continues to collect the data that it requires for the other reports during the measurement. The value cannot exceed the default value that is specified for MQIMaxTraceSize during the installation of Application Performance Analyzer.

Example: MQIMAX=(10000)

#### **LIBS**

Optional.

Specifies additional load libraries to be searched. A list of data set names is separated by commas. A maximum of 10 data set names is allowed.



Example: LIBS=(USER1.LOADLIB,TEST1.LOADLIB)

## **DIRS**

Optional.

Specifies up to 440 bytes of HFS directory path names to be searched by Application Performance Analyzer, enclosed in quotes and each separated by one or more spaces. These are applicable only when sampled HFS programs have relative path names. The LIBS and DIRS keywords are mutually exclusive.

Example: DIRS=("/u/axx01 /u/axx01/cpp")

## **STEP**

Optional.

If omitted, the first step will be measured.

Multiple STEP keywords can be specified. Specifying multiple STEP keywords creates a multistep request. A maximum of 20 STEP keywords is allowed.

Each STEP can have multiple positional parameters:

1. stepnum specifies the step number. If stepnum is specified, none of the other 3 step specification parameters can be included.
2. pgmname specifies the program name. If pgmname is specified, none of the other 3 step specification parameters can be included.
3. stepname specifies the step name. It can be specified as just a step name, or in the format stepname.procstep. If this parameter is specified, the stepnum and pgmname parameters must not be specified. If stepname is specified without .procstep, it identifies an EXEC statement that contains a PGM parameter, not one that invokes a procedure.

If the format stepname.procstep is coded, then stepname identifies an EXEC statement that invoked a procedure, and procstep identifies the EXEC statement containing a PGM parameter within that procedure.

This parameter can not be specified when selecting an active job.

### **Example 1: STEP=3**

This indicates that the third step in the job should be measured.

### **Example 2: STEP=(,TESTPGM1)**

This indicates that the first step that runs the program TESTPGM1 should be measured.

### **Example 3: STEP=(,STEP007)**

This indicates that the step named STEP007 should be measured, where STEP007 is the step name on an EXEC statement that executes a program (not an EXEC statement that invokes a procedure).

### **Example 4: STEP=(,PROC02.STEP007)**

This indicates that the step named STEP007 within the procedure invoked by step PROC02 should be measured.

### **Example 5:STEP=3 STEP=5 STEP=6 STEP=(,STEP012)**

This shows STEP being repeated to create a multistep measurement.

## **ALLSTEPS**

Optional.

Specify ALLSTEPS=YES to create a multi-step request which measures all steps in the job. When specified for a threshold measurement on the TNEW

command, all steps in the job that meet the threshold criteria are measured. When ALLSTEPS=YES is specified, the STEP keyword is meaningless, and will be ignored if coded.

Example: ALLSTEPS=YES

#### **ACTIVE**

Mandatory.

Specify YES if the job is active, or NO if the job is not active.

Example: ACTIVE=YES

#### **ASID**

Optional.

If omitted, Application Performance Analyzer will measure the first job it finds with the JOBNAME. Specifies the ASID, in decimal, of the job to be measured. Only applies when ACTIVE=YES.

Example: ASID=1023

#### **CTRAN**

Mandatory when CICS is specified in FEATURES, otherwise does not apply.

Specifies one or more CICS trancodes to measure. For all transactions, use CTRAN=\*. A list of transactions is separated by commas. A maximum of 16 transactions is allowed.

Example 1: CTRAN=(TRNA,TRNB,TRNC)

Example 2: CTRAN=\*

#### **SYSCTRAN**

Optional, if omitted the default of NO will be used.

Specify YES if you want to measure the CICS system transactions.

#### **CTERM**

Optional.

Specifies one or more CICS terminal ids to measure. A list of terminal ids is separated by commas. You can also specify a terminal id pattern, such as a terminal id prefix followed by an asterisk (\*) or an asterisk itself. The asterisk indicates that all terminals starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all terminals are to be included. A maximum of 8 terminal ids / patterns is allowed.

Example:

CTERM=(TRM1,TRM2,TRM3)

CTERM=TRM\*

CTERM=\*

#### **NONCTERM**

Optional. If omitted, the default value of YES will be used.

Specify NO if you do not want to measure CICS transactions that run non-terminal attached.

#### **ITRAN**

Optional.

When measuring a single IMS/MPP or IMS/IFP region as entered in the JOBNAME parameter, this specifies an IMS transaction to include when measuring that IMS/MPP or IMS/IFP region. You can also specify a transaction ID pattern, such as a transaction ID prefix followed by an asterisk

(\*) or an asterisk by itself. The asterisk indicates that all transaction ids starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all transactions are to be included.

Example:

```
ITRAN=IMSTRN1
ITRAN=IMSTRN*
ITRAN=*
```

**Note:** Values in ITRAN, IPROG and IUSER are ANDed together to determine which transactions are included in a measurement.

**Note:** When limiting the observation to specific IMS transactions in an MPP or IFP region, Application Performance Analyzer samples only when the transactions are running. The observation continues to run for the requested duration.

When measuring multiple IMS/MPP regions simultaneously, as indicated by a dash '-' in the JOBNAME parameter and a list of IMS/MPP regions in the JOBNAMES parameter, this specifies a single IMS transaction to include when measuring the IMS/MPP regions. In this case, the complete transaction code must be provided and the IPROG and IUSER parameters are not applicable.

Example:

```
JOBNAME=(-) ITRAN=(TXNA) JOBNAMES=("IMSMPP1,IMSMPP2,IMSMPP3")
```

## **I PROG**

Optional.

Specifies an IMS program to include when measuring an MPP or IFP region. You can also specify a program name pattern, such as a program name prefix followed by an asterisk (\*) or an asterisk by itself. The asterisk indicates that all programs starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all programs are to be included.

Example:

```
I PROG=IMSPGM1
I PROG=IMSPGM*
I PROG=*
```

**Note:** Values in ITRAN, IPROG and IUSER are ANDed together to determine which transactions are included in a measurement.

**Note:** When limiting the observation to specific IMS programs in an MPP or IFP region, Application Performance Analyzer samples only when the transactions associated with the programs are running. The observation continues to run for the requested duration.

## **I USER**

Optional.

Specifies an IMS user id to include when measuring an MPP or IFP region. You can also specify a user id pattern, such as a user id prefix followed by an asterisk (\*) or an asterisk by itself. The asterisk indicates that transactions initiated by user IDs starting with the prefix are to be included in the measurement. The asterisk on its own indicates that transactions initiated by all users are to be included.

Example:

IUSER=IMSUSR1  
IUSER=IMSUSR\*  
IUSER=\*

**Note:** Values in ITRAN, IPROG and IUSER are ANDed together to determine transactions that are included in a measurement.

**Note:** When limiting the observation to specific IMS users in an MPP or IFP region, Application Performance Analyzer samples only when the transactions initiated by the IMS users are running. The observation continues to run for the requested duration.

## **DDFFILTERS**

Optional

Identifies the DDF filtering criteria that are used to limit the scope of a DDF measurement, to specific correlation id, end user id or workstation id or any combination. It accepts up to three sub-keywords; CORRID, EUSERID and WKSTNID. Values in CORRID, EUSERID, and WKSTNID are ANDed together to determine SQL requests that are included in the measurement. In any of these sub-keywords, you may also specify a wildcard pattern using an asterisk (\*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times.

### **CORRID=(*corrid*)**

Optional.

Specify a DB2 correlation id or pattern. This identifies a DB2 correlation id to be included in the measurement when measuring a DDF address space. A correlation id of null (binary zero) may be specified by entering ',NULL' as the *corrid*.

### **EUSERID=(*euserid*)**

Optional. Specify an end user id or pattern. This identifies an end user id to be included in the measurement when measuring a DDF address space. An end user id of null (binary zero) may be specified by entering ',NULL' as the *euserid*.

### **WKSTNID=(*wkstnid*)**

Optional. Specify a workstation id or pattern. This identifies a workstation id to be included in the measurement when measuring a DDF address space. A workstation id of null (binary zero) may be specified by entering ',NULL' as the *wkstnid*.

Example:

```
DDFFILTERS=(CORRID=(,NULL),EUSERID=(DDFUSER1),WKSTNID=(*))
```

This indicates that remote SQL with a null correlation id, originating from the user DDFUSER1 from any workstation will be included for the measurement for the observed DDF address space.

## **DB2SP**

Optional.

Identifies the DB2 stored procedure or user-defined function to be measured. The keyword is valid only when you enter a dash (-) for the JOBNAME. It requires 4 out of 5 positional parameters to identify the type (stored procedure or user-defined function), the DB2 subsystem name or group attach name, the

schema name and the name of the procedure or function, in the format `DB2SP=(type,ssnm,schema,name,ganm)`. The *ssnm* and *ganm* positional parameters are mutually exclusive.

*Type* can be either *P* for stored procedure or *F* for user-defined function. For both *schema* and *name*, you can also specify a name pattern, for example, a name prefix followed by an asterisk (\*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches the schema and name concatenation. If a single asterisk is coded in both schema and name, Application Performance Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

Example1: `DB2SP=(P,DSN1,SCHEMA1,SP1)`

This indicates that the first occurrence of DB2 stored procedure SCHEMA.SP1, which runs in the DB2 Subsystem DSN1 is to be measured.

Example2: `DB2SP=(F,,SCHEMA2,UDF2,DGRP)`

This indicates that the first occurrence of user-defined function SCHEMA2.UDF2 that runs in the DB2 Subsystem belonging to group DGRP is to be measured.

Example3: `DB2SP=(P,DSN1,SCH*,SP1)`

This indicates that the first occurrence of stored procedure SP1 with a schema that begins with SCH, that runs in the DB2 Subsystem DSN1 is to be measured.

### **IMSID**

Optional.

Specifies the IMS subsystem ID for an IMS Multiple Region request. An IMS Multiple Region request is identified by specifying a dash in the JOBNAME keyword. Refer to the JOBNAME parameter description for details.

Example:

`IMSID=(IMSA)`

### **JOBNAMES**

Optional.

Specifies the names of the IMS MPP regions to be measured for an IMS Multiple Region request. The region names must be separated by commas and enclosed in quotes. An IMS Multiple Region request is identified by specifying a dash in the JOBNAME keyword. Refer to the JOBNAME parameter description for details.

Example:

`JOBNAMES=("IMSAMPP1,IMSAMPP4,IMSAMPP5")`

### **WASFILTERS**

Optional

Identifies the filtering criteria that are used to limit the scope of a WebSphere control region measurement to specific requests, applications, and origins. It is also used to exclude image files and specific file extensions from the measurement. It accepts the following sub-keywords; REQNAME, APPNAME, ORIGIN, NOIMAGES, and FILEEXT. Values in REQNAME, APPNAME, and ORIGIN are ANDed together to determine the WebSphere activity that is included in the measurement. NOIMAGES and FILEEXT are specified to exclude image files and specific file extensions from the reports.

**REQNAME=('reqname')**

Optional.

Specify a WebSphere request name or pattern. This identifies a WebSphere request to be included in the measurement. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards.

**APPNAME=('appname')**

Optional.

Specify a WebSphere application name or pattern. This identifies a WebSphere application to be included in the measurement. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards.

**ORIGIN=(H|I|J,'origin')**

Optional.

Specify the origin type, and an IP address, a host name or a job name to determine the WebSphere activity to be included in the measurement. It is a string of non-blank characters up to 79 bytes long.

H - Indicates the origin is a host name. In this case, the origin is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. WebSphere can sometimes show an IP address as a host name. To filter these, you must specify the filter value as an IP address, not a host name.

I - Indicates the origin is an IPv4 or IPv6 address. If a wildcard is used, it can only appear after a dot separator (for IPv4) or a colon separator (for IPv6). For example: 207.245.47.\* or 2001:db8:85a3:0:\*. However, a wildcard cannot be used with an IPv6 filter if it contains two consecutive colons. For example, the following filter value is invalid: 2001:db8:85a3::8a2e:\*. This is because the two consecutive colons and the asterisk wildcard both represent a varying number of missing values.

J - Indicates the origin is a job name. It can be from 1 to 8 alpha-national characters. A trailing asterisk can be used as a wildcard.

**NOIMAGES=(Y|N)**

Optional.

Specify whether images are to be excluded (Y) or included (N) from the measurement. Image files are identified by request names that end in any of the following file extensions:

.gif .jpg .jpeg .png .ico

**FILEEXT=('extensions')**

Optional.

Specify file extensions that are to be excluded from the measurement. One or more file extensions may be specified, each separated by a space. Any requests for those file types will be filtered out. For example: .

css .pdf .txt

Any WebSphere request whose request name ends in one of the specified file extensions will be filtered out. Each file extension must begin with a period and must be followed by at least one non-blank character. Wildcards cannot be used in this filter.

**Example:**

```
JOBNAME=(AZSR00A)
WASFILTERS=(REQNAME='*',APPNAME='*',ORIGIN=(I,'99.233.166.160'),
            NOIMAGES=Y,FILEEXT='.ccc .txt')
```

This indicates WebSphere activity managed by the WebSphere control region AZSR00A will be measured. It will include all requests and applications that originate from the IP address 99.233.166.160. Images and files with the extension .ccc and .txt will not be included in the measurement.

#### **SCHDDATE**

Mandatory if this is a Future Schedule request, otherwise does not apply.

Multiple SCHDDATE keywords can be specified to schedule future requests on multiple dates and times. Date/time is specified in the format: yyyy/mm/dd@hh:mm.

Example:

```
SCHDDATE=2004/12/03@16:00
SCHDDATE=2004/12/10@16:00
SCHDDATE=2004/12/17@16:00
SCHDDATE=2004/12/24@16:00
```

This creates a future schedule request to run a measurement on each of the four dates and times specified.

#### **RETRYAFTER**

Optional.

This is only used for future schedule requests (one or more SCHDDATE keywords must be present), where the job is expected to be active (ACTIVE=YES specified). Specifies that Application Performance Analyzer should retry the request if the target job was not active on the first attempt. Also specifies how many times to retry.

Specified in the format: (mm, FOR=nn), where mm is the number of minutes between retry attempts, and nn is the number of times to retry.

Example: RETRYAFTER=(15, FOR=3)

#### **SCHDSPAN**

Optional.

This is only used for future schedule requests (one or more SCHDDATE keywords must be present), where the measurement is to begin when the job becomes active (ACTIVE=NO specified). Specifies the number of minutes that this request will wait for the job to become active before Application Performance Analyzer expires the request.

Example: SCHDSPAN=120

#### **RUNAGAIN**

Optional.

This indicates that for a specified time interval, if the target job runs again, the measurement should be run again. The For= parm indicates how many times the measurement should potentially be repeated. The time interval is reset after each rerun of the target job. The maximum time interval for a future schedule request is 999 minutes. The maximum time interval for a single occurrence request is 31,680 minutes (22 days).

Example: RUNAGAIN=(60, FOR=3)

This means that for 60 minutes after the target job starts, Application Performance Analyzer will run the measurement again, if the job starts again. It will do this up to three times.

`RUNAGAIN=(0,FOR=5)`

This means that Application Performance Analyzer will run the measurement the first time the job runs, and again the next five times the job runs.

### **SAMPDSN**

Optional.

Specifies the name of the sample data set to be created for this measurement. This keyword is applicable only when the resulting measurement generates a single observation request. The following options that could potentially generate multiple observation requests will cause the request to fail:

- Multi-step or all steps
- Schedule with more than one date/time combination
- RunAgain
- Collateral DB2
- WebSphere Requests
- IMS Multiple Region Requests
- USS Requests

The SAMPDSN keyword accepts the positional parameter `dsn` and the keyword parameter `REPLACE`, in the format `SAMPDSN=(dsn,REPLACE=Y|N)` where:

- `dsn` - is the data set name for the sample file. Symbol substitution is not allowed for this data set name. You must ensure that appropriate security rules are in place to secure this data set against unauthorized access, while allowing access where necessary. For more details on security access and rules, please refer to the Application Performance Analyzer for z/OS Customization Guide.
- `REPLACE` indicates whether the sample data set is to be replaced, if it already exists. The default is 'N' - don't replace. The rules regarding `REPLACE` are as follows:
  - When the request is submitted, Application Performance Analyzer checks if the data set exists. If it does and `REPLACE=Y` is specified, the request is accepted, otherwise it is failed.
  - When sampling completes, Application Performance Analyzer again checks if the data set exists. If it does and `REPLACE=Y` is specified, the original sample file is deleted and reallocated, otherwise the request is failed.

**Note:** Use `REPLACE=Y` with caution. If the data set already exists and is replaced, it is possible that multiple observations may now point to the same sample file. For example: If Request #2 specifies a SAMPDSN data set name that is the same as that of Request #1; and Request #2 replaces this data set with sample data from Request #2; then both requests will now point to the same sample file. Therefore the reports for both requests will be identical.

Example: `SAMPDSN=(CAZ.SAMPLE,REPLACE=Y)`

This means for this observation request, Application Performance Analyzer will create a sample file with the name `CAZ.SAMPLE`. If that sample file already exists, Application Performance Analyzer will replace it with the sampling data for this request.



## TNEW

The TNEW command is used to create a new Observation Request which starts only when the specified threshold criteria has been satisfied for the target job-step or job-steps. The criteria are: CPU Time, Elapsed Time, and EXCP Count.

### TNEW

Mandatory.

Indicates that this is a new threshold request.

### JOBNAME

Mandatory.

Specifies the name of the job (or started task or TSO user) to be measured.

### TMSEL


Mandatory.

Specifies the criteria upon which the measurement will begin. The TMSEL keyword accepts the following parameters: CPU, ELAPSED TIME, and EXCP, in the format TMSEL=("CPU=mm:ss ELAPSED TIME=mm:ss EXCP=nnnnnnnnnn"). When more than one threshold criteria is specified, all the criteria must be met for the measurement to begin.

CPU=mm:ss specifies the threshold amount of CPU time. When the target job-step exceeds this amount of CPU time, the measurement begins. Time can be entered in seconds or in minutes and seconds. To specify the threshold time in minutes and seconds, separate the minutes value from the seconds value using a colon.

ELAPSED TIME=mm:ss specifies the threshold amount of elapsed time. When the target job-step exceeds this amount of elapsed time, the measurement begins. Time can be entered in seconds or in minutes and seconds. To specify the threshold time in minutes and seconds, separate the minutes value from the seconds value using a colon.

EXCP=nnnnnnnnnn specifies the threshold EXCP count. When the target job-step exceeds this EXCP count, the measurement begins.

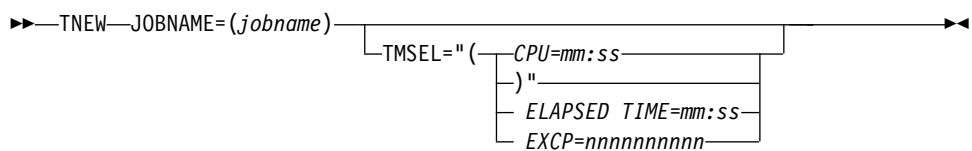

Example:

```
TNEW JOBNAME=TSTJOB01  
TMSEL=("CPU=30 ELAPSED TIME=5:00 EXCP=5000");
```

TNEW accepts the same keywords as the NEW command, with the exception of the Schedule, DB2 stored procedure or user-defined function, and IMS multiple address space keywords, which are not applicable for Threshold Monitor requests. The following keywords are not accepted on the TNEW command: DELAYSAMPLING, DB2SP, IMSID, JOB NAMES, RUNAGAIN, SCHDDATE, RETRYAFTER, and SCHDSPAN. Only one STEP keyword is accepted. The ALLSTEPS keyword can be used to measure all steps in the job that meet the threshold criteria.

## DELETE

The DELETE command is used to delete an observation request.

**REQNUM**

Mandatory.

Specifies the request number to be deleted.

**KEEP**

The KEEP command is used to override the expiration date on an observation request, and keep it until it is manually removed.

**REQNUM**

Mandatory.

Specifies the request number to be kept.

**CANCEL**

The CANCEL command is used to cancel an active observation request.

**REQNUM**

Mandatory.

Specifies the request number to be cancelled.

---

**Batch import**

The batch import program CAZIMPRT is used to load a single observation or a hierarchy of observations into the Application Performance Analyzer R02 Observation Session List. This can be a native sample file, one that has been previously exported, or an exported hierarchy of observations. The import program creates a new observation(s) in the target system, assigning a new request number to each observation and maintaining the hierarchy as exported. The date and time of the imported request is set to the current date and time and the expiry date is recalculated based on the rules of the importing system.

Sample template JCL is supplied in hlq.SCAZSAMP in member CAZIMPRT.

```
//CAZIMPRT JOB (job parameters)
//*
//S1 EXEC PGM=CAZIMPRT,REGION=4M,PARM='STCID=stcid'
//STEPLIB DD DISP=SHR,DSN=hlq.SCAZAUTH
//SYSPRINT DD SYSOUT=*
//SAMPIN DD DSN=inputdsn,DISP=SHR
```

1. Add the JOB parameters to meet your system requirements.
2. On the EXEC statement, replace *stcid* with the Application Performance Analyzer instance id of the system you want to import into. This parameter can be omitted if only one instance of Application Performance Analyzer is running on your image.
3. On the STEPLIB DD statement, replace *hlq.SCAZAUTH* with the name of your installation's authorized library containing Application Performance Analyzer's load modules.
4. On the SAMPIN DD statement, replace *inputdsn* with the name of the native sample file or TSO XMIT file containing the sample to be imported.

---

## Chapter 14. Realtime Monitor

The Realtime Monitor facility lets you view information about an in-progress measurement. Start this facility by selecting an active measurement from Observation Session List using the “R” line command. You can also choose to have the Realtime Monitor launched automatically when you start a measurement for an active job. Use SETUP in the Observation Session List to select this option.

---

### Auto-refresh mode

In this mode the panel is refreshed automatically to show changing data as it is measured. In auto-refresh mode the keyboard is locked. To halt auto-refresh mode, and unlock the keyboard, press the Attention key. You can then refresh the panel manually by repeatedly pressing the ENTER key.

To re-activate the auto-refresh mode, enter the PULSE primary command. You can abbreviate this as P.

---

### Monitor views

The Realtime Monitor facility offer various views of the measurement data. The upper portion of the screen shows a menu of the available monitor views. To select a view, either enter its code on the command line or place the cursor on the field and press the ENTER key.

---

### ACCUM and CURRENT modes

Some monitor views display data based on either all the accumulated (ACCUM) data for the measurement, or for the last measured “time slice” (CURRENT). “(ACCUM)” or “(CURRENT)” is displayed on the heading line of views affected by this mode setting.

Enter the ACCUM command to set the mode to report accumulate data. You can abbreviate this as A. Enter the CURRENT command to set the mode to report on the most recent time slice. You can abbreviate this as C. Use the SETUP command to adjust the size of the time slice (expressed as number of samples). The default value is 100 samples.

---

### SETUP command

Use the SETUP command to change various default options. You can change the following:

- Panel displayed at startup
- Display auto-refresh enabled
- Auto-refresh interval
- Length of current time slice

## View 1. Measurement overview

View 1. Measurement Overview shows an at-a-glance summary of the measurement status and shows a very high level overview of observed resource usage. If in 'autorefresh' mode, data in this screen will refresh automatically at the specified rate. Otherwise press ENTER to refresh the data.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00025
Command ==>>> _____ Scroll ==>> PAGE
  1. Overview      3. Environment    5. Data Mgmt
  2. CPU Util.    4. CPU/Modules

View 1. Measurement Overview

+Measurement Progress -----+
| Requested   90,000  100.0%  | .....|
| Samples Done 39,673  44.0%  | -----|
| CPU Active   4,314  10.8%  | -----|
| WAIT        34,393  86.6%  | -----|
| Queued       966    2.4%  | -|
+-----+

+System Resource Usage-----+
| CPU time TCB   21.96 sec  | No.of TCBS      9|
| CPU time SRB   3.50 sec  | EXCPs           0|
| Storage frames 6,611    | Dataspace frames 0|
| Pages in       0        | Pages out       0|
+-----+

+DB2 Activity-----+
| SQL call count 7,809    | DB2 plan        PFSAMPA|
| SQL samples    2,287    | DB2 DBRM        PFSAMPC|
+-----+

+CICS Transactions-----+
| Active txns    0        | Current TranId  n/a|
| Suspended txns 8        | CICSTaskId     1,672|
+-----+

```

## Measurement progress

This section shows the progress of the measurement by reporting the total number of samples completed. The sample counts are further subdivided by CPU Active samples, TCB WAIT samples, and Queued samples.

Under heading	This is displayed
Requested	The number of samples requested. A fixed percentage value of 100 percent is shown here as this number of samples represents the entire measurement. The actual number of samples performed could exceed this value if the "run to end of step" option was selected. Similarly the measurement could terminate before the indicated number of samples is done if the measured step terminates first.
Samples Done	The number of samples done. This is the number of samples performed so far. A percentage value and histogram indicate the ratio of samples completed to the number of requested samples.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. A percentage value and histogram indicate the ratio of the number of CPU Active samples to the total number of samples completed so far.

Under heading	This is displayed
WAIT	The number of samples done in which all TCBs were in WAIT (non dispatchable) state. A percentage value and histogram indicate the ratio of the number of WAIT samples to the total number of samples completed so far.
Queued	The number of samples done in which no TCBs were CPU active and at least one TCB was dispatchable. This indicates a state in which work was not being done in the measured region because no CPU (or memory) was available. A percentage value and histogram indicates the ratio of the number of Queued samples to the total number of samples completed so far.

## System resource usage

This section shows various aspects of general resource usage observed during the measurement interval. Resources quantified here are: CPU time, storage usage, EXCPs, and paging.

Under heading	This is displayed
CPU Time TCB	The number of CPU seconds consumed by all TCBs in the measured region for the duration of the measurement interval.
No. of TCBs	The number of TCBs in existence at the time of the last data refresh.
CPU Time SRB	The number of CPU seconds consumed in SRB mode in the measured region for the duration of the measurement interval.
EXCPs	The number of EXCPs (Execute Channel Program) performed during the measurement interval.
Storage Frames	The number of 4K byte page frames (real storage) for virtual storage assigned to the address space at the time of the last data refresh.
Data Space Frames	The number of 4K byte page frames (real storage) for Data Space storage assigned to the address space at the time of the last data refresh.
Pages in	The number of page in operations performed during the measurement interval.
Pages out	The number of page out operations performed during the measurement interval.

## DB2 activity

This section shows information about DB2 activity observed during the measurement interval.

Under heading	This is displayed
SQL call count	The number of SQL calls counted during the measurement interval. This information is available only if the DB2+ feature was enabled for the measurement.
SQL samples	The number of samples in which SQL call processing was in progress.
DB2 Plan	The name of the DB2 Plan for the last SQL request whose execution was sampled. This information is available only if the DB2 feature was enabled for the measurement.

Under heading	This is displayed
DB2 DBRM	The name of the DB2 DBRM for the last SQL request whose execution was sampled. This information is available only if the DB2 feature was enabled for the measurement.

## CICS transactions

This section shows information about CICS transactions that are currently active. This information is available only if the address space being measured is a CICS region and the CICS measurement feature is enabled.

Under heading	This is displayed
Active txns	The number of CICS transactions currently active (includes suspended transactions).
Current TranId	The transaction ID of the currently executing CICS transaction.
Suspended txns	The number of CICS transactions currently suspended. This number is also included in the Active txns value.
CICS TaskId	The task number of the CICS transaction currently executing.

---

## View 2. CPU utilization

View 2. CPU Utilization quantifies distribution of CPU usage. The quantifications are reported in two modes: Overall and Current.

Overall mode appears on the left side of the screen and shows accumulated quantifications based on the overall measurement. Each quantity is an overall sample count. It is also expressed as a percentage and illustrated by a histogram.

Current mode appears on the right side of the screen and shows quantifications representing the last measured time slice. Each quantity is a sample count for the time slice and is also illustrated by a histogram. (Use the SETUP command to adjust the size of the time slice.)

If in "auto-refresh" mode data in this screen will refresh automatically at the specified rate. Otherwise press ENTER to refresh the data.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00028
Command ==>_____ Scroll ==> PAGE

1. Overview      3. Environment  5. Data Mgmt
2. CPU Util.    4. CPU/Modules

View 2. CPU Utilization

+Overall CPU Activity 7 min 7.81 sec -----+ +Current 0.66 sec -----+
| Samples      64,179  71.3% -----+ | 100 '+++++' |
| CPU Active   5,597   8.7% - | 39 ===== |
| WAIT        57,303  89.2% -----+ | 52 ===== |
| Queued       1,279   1.9% - | 9 = |
+-----+ +-----+

+CPU Usage Distribution -----+ +Current -----+
| CPU Active   5,597   8.7% - | 39 '+++++' |
| Application  104    1.8% - | 1 = |
| System      2,119  37.8% -----+ | 18 ===== |
| DB2 SQL     217    3.8% - | 0 |
| Data Mgmt    0     0.0% | 0 |
| Unresolved  3,164  56.4% -----+ | 20 ===== |
+-----+ +-----+

+CPU Modes -----+ +Current -----+
| CPU Active   5,604   8.7% - | 39 '+++++' |
| Supv Mode    3,828  68.3% -----+ | 23 ===== |
| Prob Mode    1,776  31.6% -----+ | 16 ===== |
| In SVC        424   7.5% - | 2 = |
| AMODE 24      0     0.0% | 0 |
| AMODE 31     5,604 100.0% -----+ | 39 ===== |
| AMODE 64      0     0.0% | 0 |
| User key     1,887  33.6% -----+ | 16 ===== |
| System key    3,717  66.3% -----+ | 23 ===== |
+-----+ +-----+

```

## CPU activity

This section shows sample counts for the overall measurement and for the current time slice. These are categorized as CPU Active, WAIT and Queued.

Under heading	This is displayed
Samples	The number of samples performed in the overall measurement and in the time slice. The percentage shown in the Overall CPU Activity section represents the ratio of the number of samples completed to the number of samples requested.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which CPU activity was observed. The second sample count shows the number of CPU Active samples in the current time slice. The second histogram shows the proportion of the current time slice in which CPU activity was observed.

Under heading	This is displayed
CPU WAIT	The number of samples done in which all TCBs were in WAIT (non dispatchable) state. The percentage value indicates the ratio of the total number of CPU WAIT samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which all TCBs were in WAIT state. The second sample count shows the number of CPU WAIT samples in the current time slice. The second histogram shows the proportion of the current time slice in which all TCBs were observed to be in WAIT state.
Queued	The number of samples done in which no TCBs were CPU active and at least one TCB was dispatchable. This indicates a state in which work was not being done in the measured region because no CPU (or memory) was available. The percentage value indicates the ratio of the total number of Queued samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which a TCB was dispatchable and not serviced. The second sample count shows the number of Queued samples in the current time slice. The second histogram shows the proportion of the current time slice in which one or more TCBs was dispatchable and not serviced.

## CPU usage distribution

This section shows a breakdown of CPU active TCB observations. CPU active observations are broken down by categories: Application code, System services, DB2 and Data management.

Under heading	This is displayed
CPU Active	The number of observations of CPU Active TCBs. This value could be higher than the number of CPU Active samples because each CPU Active TCB is counted. Two or more TCBs could be serviced concurrently by separate CPUs. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time for which CPU activity was observed. The second sample count shows the number of CPU Active TCB observations in the current time slice.
Application	The number of CPU Active TCB observations in which execution was observed in application programs. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of application program observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed in application code. The second count shows the number of application code CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in application code in this time slice.



Under heading	This is displayed
System	The number of CPU Active TCB observations in which execution was observed in system services. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of system services observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed in system routines. The second count shows the number of system services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in system services in this time slice.
DB2 SQL	The number of CPU Active TCB observations in which execution was in DB2 routines servicing SQL requests. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of DB2 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be processing SQL requests. The second count shows the number of DB2 services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in DB2 services in this time slice.
Data management	The number of CPU Active TCB observations in which execution was in the servicing of Data Management requests. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of Data Management service observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be processing Data Management requests. The second count shows the number of Data Management services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Data Management services in this time slice.
Unresolved	The number of CPU Active TCB observations in which execution was in object code in storage locations for which no load module information could be obtained. This can occur for modules fetched into CSA by a region other than the one being measured. This quantity is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of unresolved location observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in unresolved storage locations. The second count shows the number of unresolved storage location CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in unresolved storage locations in this time slice.

## CPU modes

This section shows a breakdown of CPU active TCB observations by mode of CPU execution. These modes are not all mutually exclusive. For example, execution in Problem State could also be counted as execution in AMODE 31.

Under heading	This is displayed
CPU Active	The number of observations of CPU Active TCBs. This value could be higher than the number of CPU Active samples because each CPU Active TCB is counted. Two or more TCBs could be serviced concurrently by separate CPUs. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time for which CPU activity was observed. The second sample count shows the number of CPU Active TCB observations in the current time slice.
Supv Mode	The number of CPU Active TCB observations in which execution was in Supervisor Mode. The percentage value indicates the ratio of the number of Supervisor Mode observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in Supervisor Mode. The second count shows the number of Supervisor Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Supervisor Mode in this time slice.
Prob Mode	The number of CPU Active TCB observations in which execution was in Problem Mode. The percentage value indicates the ratio of the number of Problem Mode observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in Problem Mode. The second count shows the number of Problem Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Problem Mode in this time slice.
In SVC	The number of CPU Active TCB observations in which execution was in a Supervisor Call. The percentage value indicates the ratio of the number of SVC execution observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in a Supervisor Call. The second count shows the number of Problem Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in SVC execution in this time slice.
AMODE 24	The number of CPU Active TCB observations in which execution was in 24 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 24 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 24. The second count shows the number of AMODE 24 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 24 in this time slice.

Under heading	This is displayed
AMODE 31	The number of CPU Active TCB observations in which execution was in 31 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 31 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 31. The second count shows the number of AMODE 31 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 31 in this time slice.
AMODE 64	The number of CPU Active TCB observations in which execution was in 64 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 64 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 64. The second count shows the number of AMODE 64 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 64 in this time slice.
User key	The number of CPU Active TCB observations in which execution was in user storage key (Key 8). The percentage value indicates the ratio of the number of user key observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in user key. The second count shows the number of user key CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in user key in this time slice.
System key	The number of CPU Active TCB observations in which execution was in system storage key (not key 8). The percentage value indicates the ratio of the number of system key observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in system key. The second count shows the number of system key CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in system key in this time slice.

## View 3. Measurement environment

The data reported here is static and shows the measurement request parameters and information about the measurement environment.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00028
Command ==>_____ Scroll ==> PAGE
  1. Overview      3. Environment    5. Data Mgmt
  2. CPU Util.    4. CPU/Modules

View 3. Measurement Environment

+Request Parameters-----+
| Request number   2132
| Description      CICS region
| Data extractors  CICS,DB2,DB2+
+-----+
| Requesting user  USR01          | Nbr of samples   90,000
| Time of request  09:53:34         | Duration         600 sec
| Date of request  Tue May-31-2005 | Active/pending   Active
| Job name         CICS22A         | Proc step name   n/a
| Step name/number n/a           | Delay time       none
+-----+
+Measurement Environment-----+
| Job name         CICS22A         | Region size <16MB 1,712,128K
| Job number       STC02108        | Region size >16MB  4K
| Step name        CICS22A         | Step program      DFHSIP
| ASID             71              | Region type       CICS TS 2.2
| DB2 Attach type  CICS
+-----+
| System ID        X235            | IBM APA Version   1.100A
| SMFID            X235            | O/S level         z/OS 01.06.00
+-----+
| Nbr of CPUs     2                | CPU model         1247
| CPU rate factor  6,015           | CPU version       0A
| MIPS per CPU    54              | SUS per second    2660.0
+-----+

```

## Request parameters

These values were established when the measurement was requested.

Under heading	This is displayed
Request number	The unique four-digit identifier assigned to the measurement.
Description	A description specified when the measurement was requested.
Data extractors	The specified data extractors (DB2, CICS, etc.)
Requesting user	The TSO user ID of the user that requested the measurement.
Time of request	The time of day the request was made.
Date of request	The date upon which the request was made.
Job name	The name of the job that was specified to be measured.
Step name/number	The step name or step number that was specified to be measured, if applicable.
Step program	The name of the step program that was specified to be measured, if applicable.
Number of samples	The number of samples specified.

Under heading	This is displayed
Duration	The specified measurement duration.
Active/pending	Indicates whether the measurement request specified an active job (an immediate measurement) or one that was to run later when execution of the job step is detected.
Proc step name	The procedure step name, if specified.
Delay time	The number of seconds specified for which the start of the measurement was to be delayed from the start of the job step.

## Measurement environment

Values relating to the environment in which the measurement took place are reported here.

Under heading	This is displayed
Job name	The name of the measured job.
Job number	The job number of the measured job assigned by JES.
Step name	The name of the measured step.
ASID	The ASID (address space ID) of the measured job.
DB2 attach type	The type of DB2 attachment, if DB2 data recorded.
Region size < 16MB	The region size in the 24 bit address range.
Region size > 16MB	The region size above the 24 bit address range.
Step program	The name of the measurement step program (specified in the EXEC JCL statement).
Region type	The type of region (Batch, TSO, IMS, CICS, etc.) measured.
System ID	The system identifier of the system on which the measurement took place.
SMFID	The SMF ID assigned to the system on which the measurement took place.
IBM APA vers.	The version of IBM Application Performance Analyzer for z/OS that performed the measurement.
O/S Level	The operating system and level.
Nbr of CPUs	The number of CPUs in the system on which the measurement took place.
CPU rate factor	The factor used to determine CPU performance.
MIPS per CPU	The speed, in machine instructions per second, of one CPU. This is derived using the CPU rate factor.
CPU model	The CPU model number.
CPU version	The CPU version.
SUs per second	The number of service units per CPU second.

## View 4. CPU active modules

### Overall CPU activity

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00034
Command ==>                                           Scroll ==> PAGE
  1. Overview      3. Environment  5. Data Mgmt
  2. CPU Util.    4. CPU/Modules

View 4. CPU Active Modules (CURRENT)

+Overall CPU Activity 8 min 14.33 sec -----+ +Current 0.66 sec -----+
| Samples      74,159  82.3% -----          | | 100 ' ' ' ' ' ' ' ' |
| CPU Active   7,584  10.2% --                | | 42  =====         |
+-----+-----+-----+-----+-----+-----+-----+-----+
Name      Description          Percent of CPU Time * 10.00% ±15.6%
          *...1...2...3...4...5...6...7...8...9
DFHSIP CICS Services          11.90 =====
DFHPGDM PG domain - initi     7.14 =====
185C6xxx Unresolved Address   4.76 ==
152D3xxx Unresolved Address   4.76 ==
186E3xxx Unresolved Address   2.38 =
17AEFxxx Unresolved Address   2.38 =
17D88xxx Unresolved Address   2.38 =
DFHMCX   BMS fast path mod    2.38 =
18227xxx Unresolved Address   2.38 =
18542xxx Unresolved Address   2.38 =
17848xxx Unresolved Address   2.38 =
-----

```

Under heading	This is displayed
Samples	The number of samples performed in the overall measurement. The percentage shown section represents the ratio of the number of samples completed to the number of samples requested. This percentage is also represented by a histogram.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The histogram represents this percentage and shows the proportion of the overall measurement time in which CPU activity was observed.

### Current

This shows the number of samples in the current time slice and the number of these samples in which CPU activity was observed. The heading shows the elapsed time of the time slice.

Under heading	This is displayed
Samples	The number of samples performed in the current time slice.
CPU Active	The number of samples in the current time slice in which one or more CPUs were executing instructions in the measured region. The histogram represents the proportion of the time slice in which CPU activity was observed.

## Module attribution

Each detail line in this section shows a load module name and the percentage of observed CPU activity attributed to the module. The quantifications shown in this section apply to the full measurement if in ACCUM mode and to the last time slice if in CURRENT mode. Enter the ACCUM command or the CURRENT command to switch between these two modes.

Under heading	This is displayed
Name	The name of the module in which CPU activity was observed. Use the "+" line command to expand this line to show CSECT information. For an address range for which a module name could not be determined, this shows a hexadecimal address range.
Description	A functional description of the module if one is available.
Percent of CPU Time	The percentage of CPU time consumed while executing in the module. This is the ratio of the number of CPU Active TCB observations in the module to the total number of CPU Active observations.

## View 5. Data mgmt service time

In ACCUM mode, files for which EXCPs were processed during the measurement are shown. In CURRENT mode, files for which EXCPs were processed since the last data refresh are shown. In both cases the detail lines are sorted in descending sequence by EXCP count since the last data refresh.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2133/CICS22A) Row 00001 of 00004
Command ==> Scroll ==> PAGE
1. Overview 3. Environment 5. Data Mgmt
2. CPU Util. 4. CPU/Modules

View 5. Data Mgmt Service Time (ACCUM)

DDNAME Type EXCPs CPU-Wait-Queued Dataset Name
VSAMI VSAM 4,568 ===== USR01.DATA.TESTPF
INFILE QSAM 45 USR01.TESTPF2.INFILE
OUTFILE QSAM 20 USR01.TESTPF2.OUTFILE
STEPLIB 2 APL1.RTEST.LOADLIB
-----

```

Under heading	This is displayed
DDNAME	The DDNAME to which the file is allocated. A separate line appears for each OPEN of the DDNAME. A separate line also appears for each data set in a concatenation.
Type	The type of file access (QSAM, BSAM, etc.) is reported if this information was determined. Measurement of execution in a data management routine for the file must have taken place for this to be reported.
EXCPs	In ACCUM mode, the number of EXCPs since the first file activity measurement. In CURRENT mode, the number of EXCPs since the last data refresh.

Under heading	This is displayed
CPU-Wait-Queued	A histogram showing the proportion of samples in which execution was observed in data management routines servicing access of the file. The colors green, red and yellow indicate CPU active, Wait and Queued respectively. The width of the field represents 100 percent of the measurement interval for ACCUM mode and 100 percent of the last time slice for CURRENT mode.
Data set Name	The name of the data set.



# Chapter 15. Application Performance Analyzer Graphical User Interface (GUI).

This chapter describes the Application Performance Analyzer GUI. All menus, tool bars and views that are part of the Application Performance Analyzer GUI are detailed in this chapter.

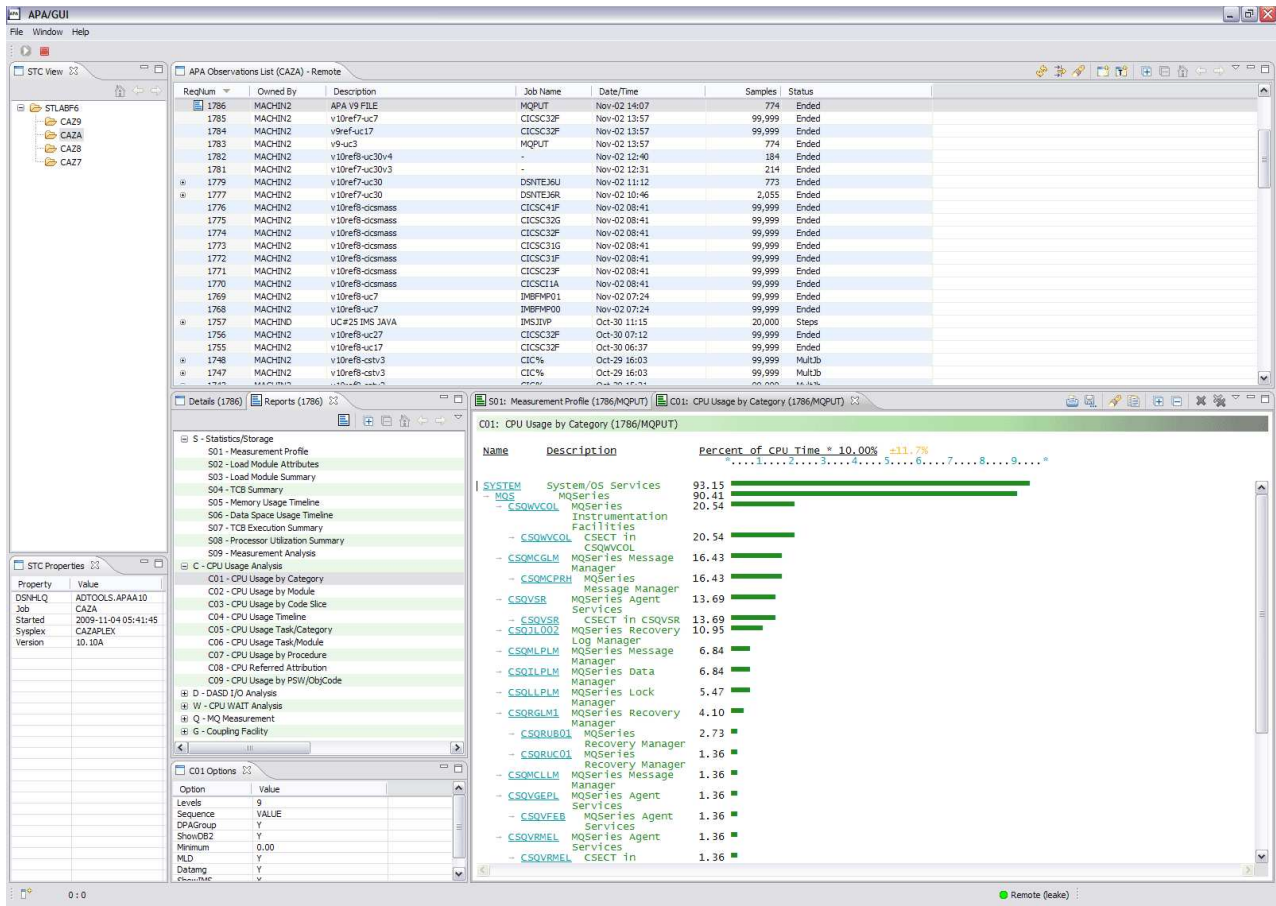


Figure 1. The Application Performance Analyzer GUI

## Getting started with the Application Performance Analyzer GUI

The Application Performance Analyzer GUI is a desktop version of Application Performance Analyzer ISPF. The Application Performance Analyzer GUI encompasses both the Observation Request and Reporting functions, including the R02 screens list, detail views, edit functions and reports for the Observation.

The Application Performance Analyzer GUI is an alternative interface to Application Performance Analyzer, meant to provide a majority of parallel tools and functionality as those from Application Performance Analyzer ISPF, the main interface to Application Performance Analyzer. The Application Performance Analyzer GUI is used for submitting new observation requests and for navigating the Performance Analysis Reports generated from observation requests. The Application Performance Analyzer GUI is organized into several components,

which include a menu, tool bars, views, wizards and dialogs. Tool bars are available both from the main application and for most of the views.

The views display and provide functions to multiple components of Application Performance Analyzer at once. The major views include:

- STC View, which lists all active started tasks,
- Observations List View, which lists all observations,
- Observation Detail View, which provides details of an observation,
- Reports List View, which lists all reports for an observation, and
- Report View, which displays an individual report.

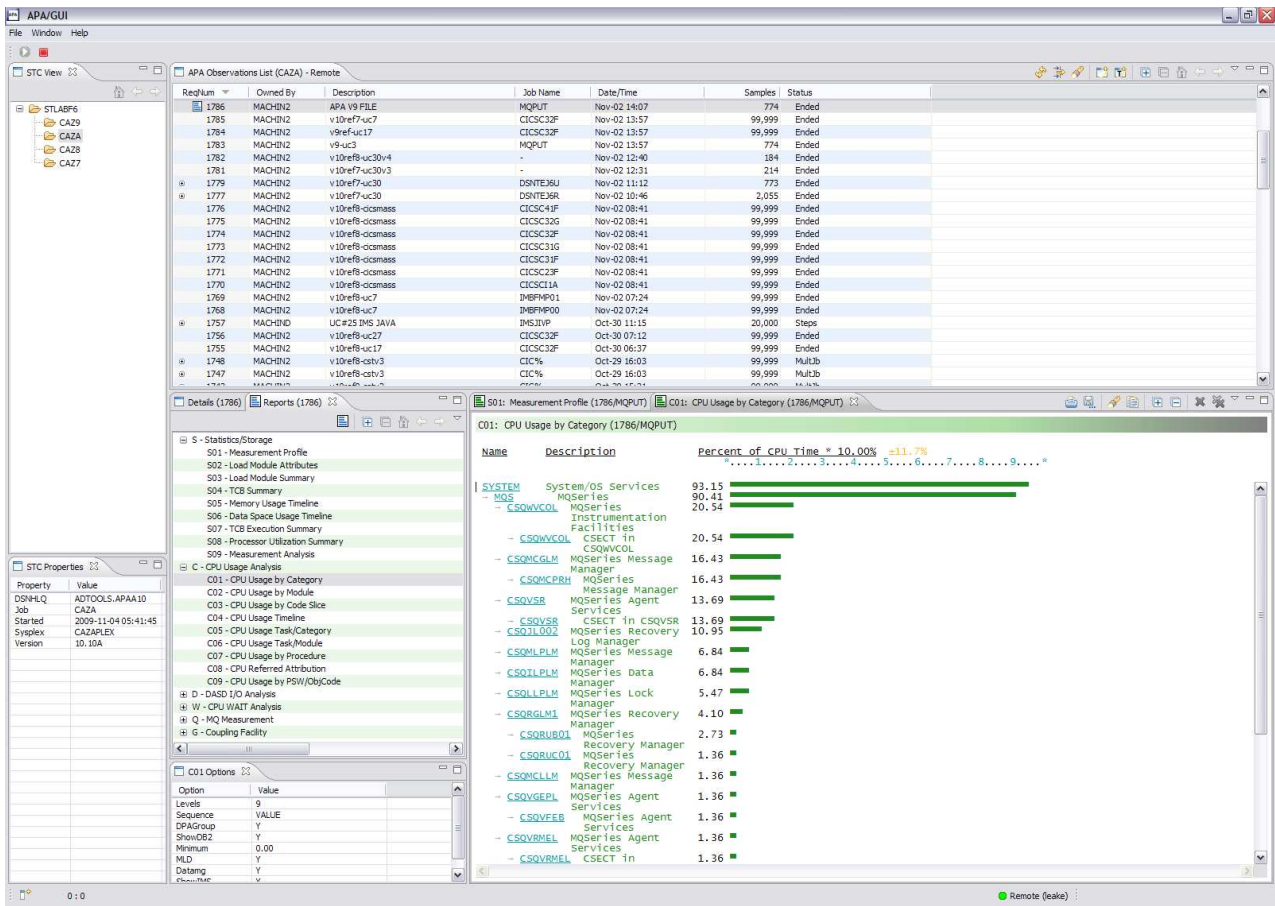


Figure 2. The Application Performance Analyzer GUI layout

## System requirements

The Application Performance Analyzer GUI plug-in must be installed on a Windows platform (XP, Vista, Server 2003/2008, Windows 7/8). Details of the Software Pre-Requisites are included in the Application Performance Analyzer GUI ReadMe, "readme.html", included in the Application Performance Analyzer install zip file.

## Communications

The Application Performance Analyzer GUI platform has built-in support for both local and remote (z/OS) repositories. The local repository is populated and refreshed automatically with the most recent transaction data, with the exception

of the observation reports. Reports are downloaded on request by selecting Download Reports from the context menu of the Observation List or clicking the Download Reports button on the Reports View.

When launched, the local repository of the startup Application Performance Analyzer started task (STC) is automatically loaded and displayed. The remote repository is accessed via TCP/IP communications between the Application Performance Analyzer GUI and z/OS. An Application Performance Analyzer PDTCC extension must be installed and active on z/OS.

The figure below provides an example of a local connection. Refer to Figure 2 on page 724 for an example of a remote connection.

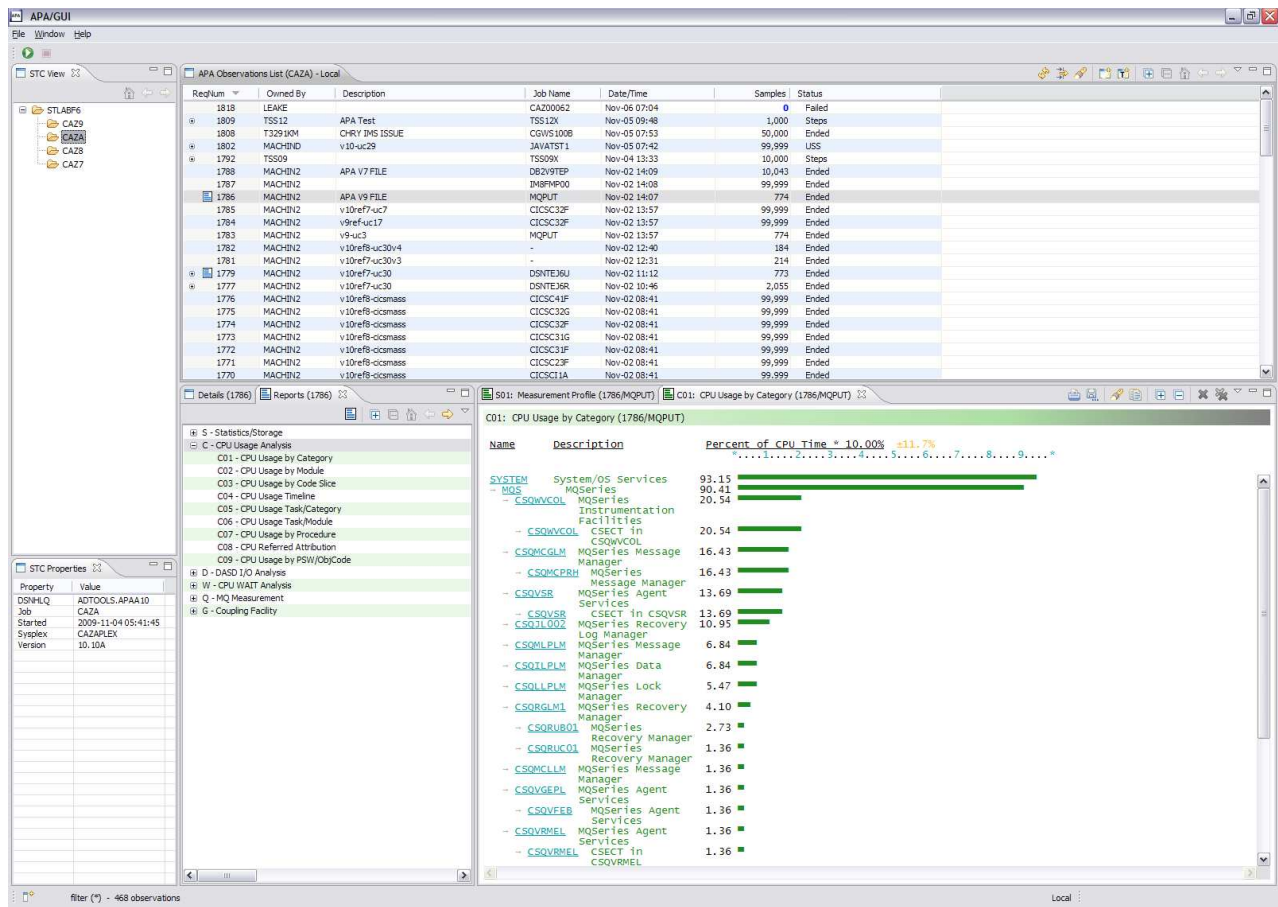


Figure 3. Local vs. remote connections

## New Connection Dialog

A Connection and Credential are required to log on to z/OS and connect to the Application Performance Analyzer remote repository. APA requires a Problem Determination Tools for z/OS connection be established. When a Problem Determination Tools for z/OS connection is established, APA is automatically connected. For details to configure and start a Problem Determination Tools connection, follow the instructions in the *IBM Explorer for z/OS Users Guide* or the *IBM Problem Determination Tools for z/OS Common Component* section of the desktop Help.

## Preferences

The Application Performance Analyzer GUI application preferences are accessed using the Window menu of the Main Toolbar. Preferences are persistent user property settings for the Application Performance Analyzer GUI.

### General preferences

General preferences include general purpose view property settings.

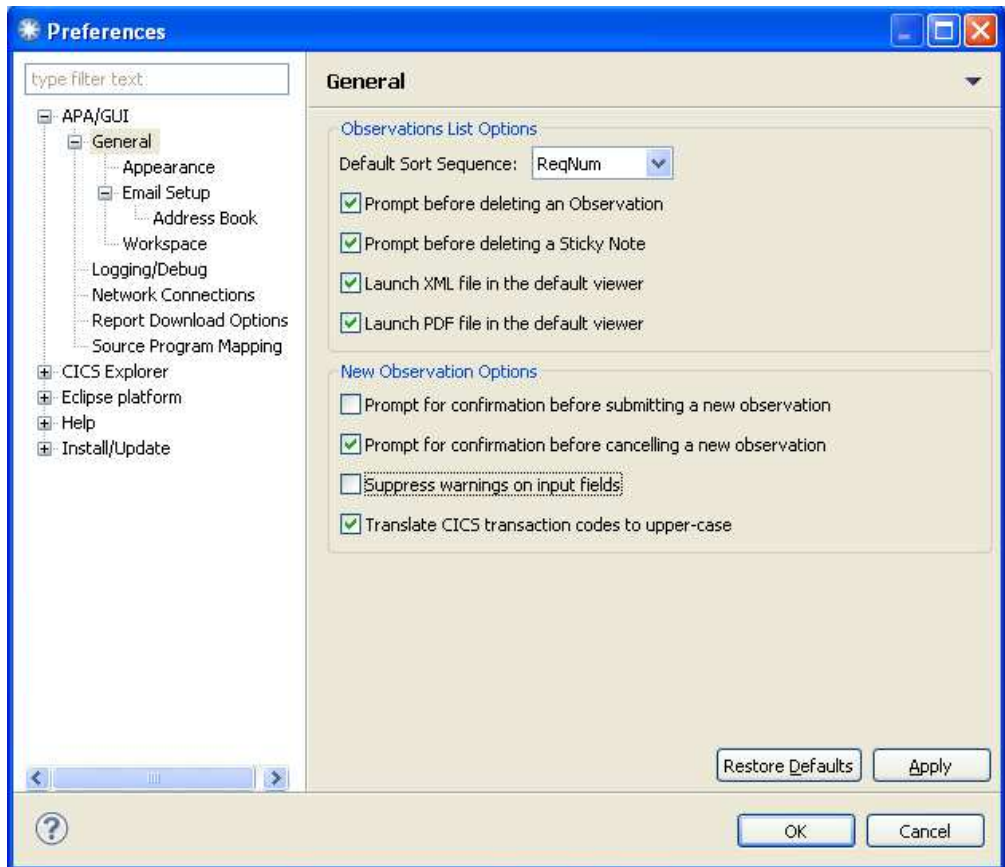


Table 13. General preferences and descriptions

Preference	Description
Default Sort Sequence	Order to sequence the observations in the Observations List view  Default: <i>ReqNum</i>
Prompt before deleting an Observation?	Prompt (confirmation) is displayed prior to deleting an observation.  Default: checked
Prompt before deleting a Sticky Note	Prompt (confirmation) will be displayed prior to deleting a sticky note  Default: checked

Table 13. General preferences and descriptions (continued)

Preference	Description
Launch XML in the default viewer	Downloaded XML reports will be automatically launched in the default desktop XML viewer.  Default: checked
Launch PDF in the default viewer	Downloaded PDF reports will be automatically launched in the default desktop PDF viewer (Adobe Acrobat).  Default: unchecked
Prompt for confirmation before submitting a new observation	Prompt (confirmation) will be displayed prior to submitting a new observation request.  Default: unchecked
Prompt for confirmation before cancelling a new observation	Prompt (confirmation) will be displayed prior to cancelling a new observation request.  Default: unchecked
Suppress warnings on input fields	Suppress warnings (yellow light) on input fields for a new observation request.  Default: unchecked
Translate CICS transaction codes to upper-case	Translate/transform CICS transaction codes to upper-case.  Default: checked

## Email preferences

The Application Performance Analyzer GUI report e-mail function provides a tool to send a report view, optionally including any associated sticky notes, to one or more e-mail addresses. E-mail setup preferences, accessible from the General preferences category, include property settings for e-mail communications. The e-mail SSL Certificate must reside in the keystore file location defined in the Network Connection Preferences.

**Note:** Application Performance Analyzer GUI must be exited and re-started for e-mail changes to take effect.

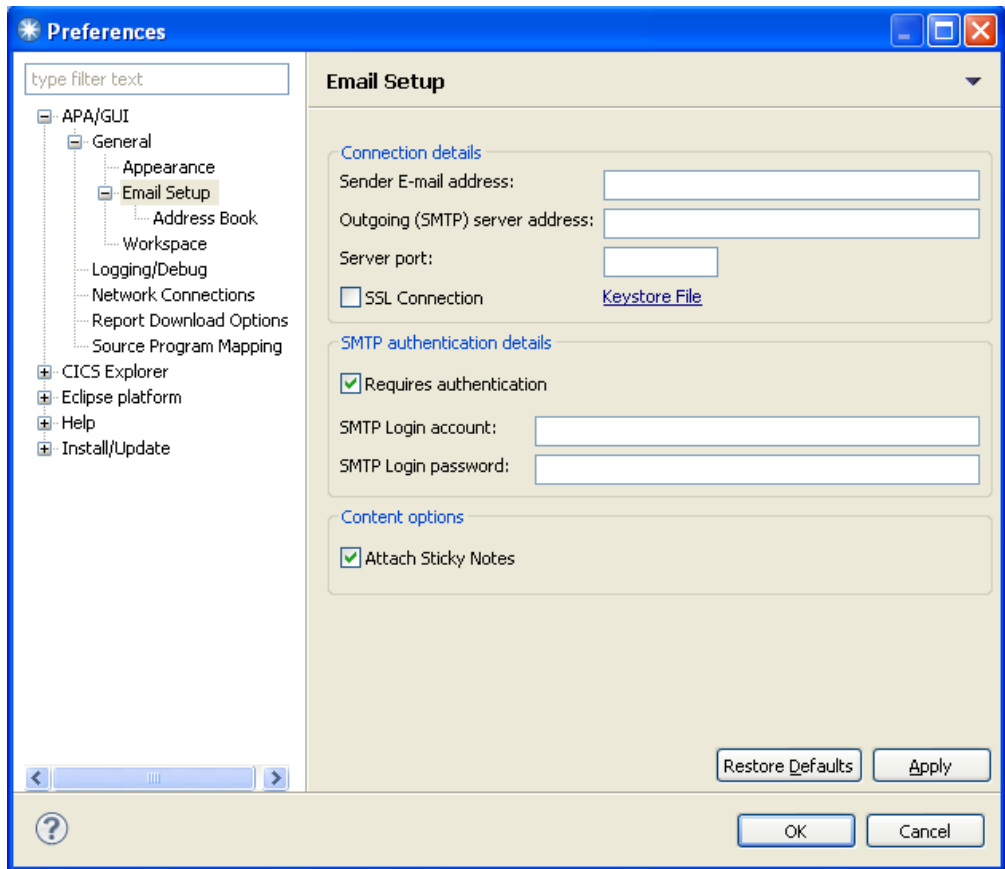


Table 14. Email preferences and descriptions

Preference	Description
Sender E-mail address	Sender (“from”) e-mail address used to send Application Performance Analyzer GUI e-mails.
Outgoing (SMTP) server address	SMTP server address.
Server port	Port for the SMTP server. Default: 25
SSL Connection	SMTP server requires an SSL connection. Default: unchecked
Keystore File	Link to Keystore file preference located in the Network Connection Preferences.
Requires authentication	SMTP server requires authentication information Default: unchecked
SMTP Login account	Account/user id to login/connect to the SMTP server.
SMTP Login password	Account password for SMTP server login.
Attach Sticky Notes®	Include sticky notes (if any) as e-mail attachment. Default: unchecked



## Address book preferences

Address book preferences, accessible from the Email setup preferences category, provides a repository to store a list of contact e-mail addresses. It is used to select the “To” and “Cc” addresses for an Application Performance Analyzer GUI e-mail.

A new address must be entered in the ‘New Address’ text box then click the “Add” button. It will then be displayed in the address list below. Addresses displayed in the list can be copied or deleted. Copied addresses can then be pasted into the new address text box.

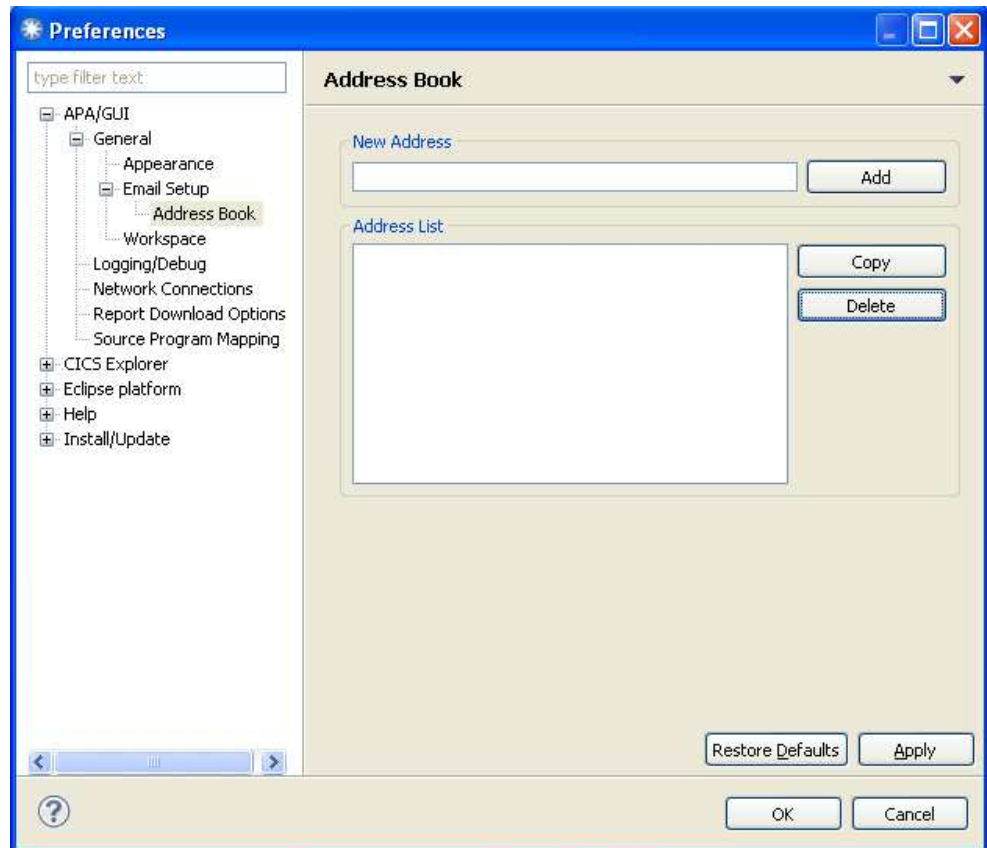


Figure 4. Address book preferences window

## Environment preferences

Environment preferences, accessible from the General preferences category, include environment-level property settings.

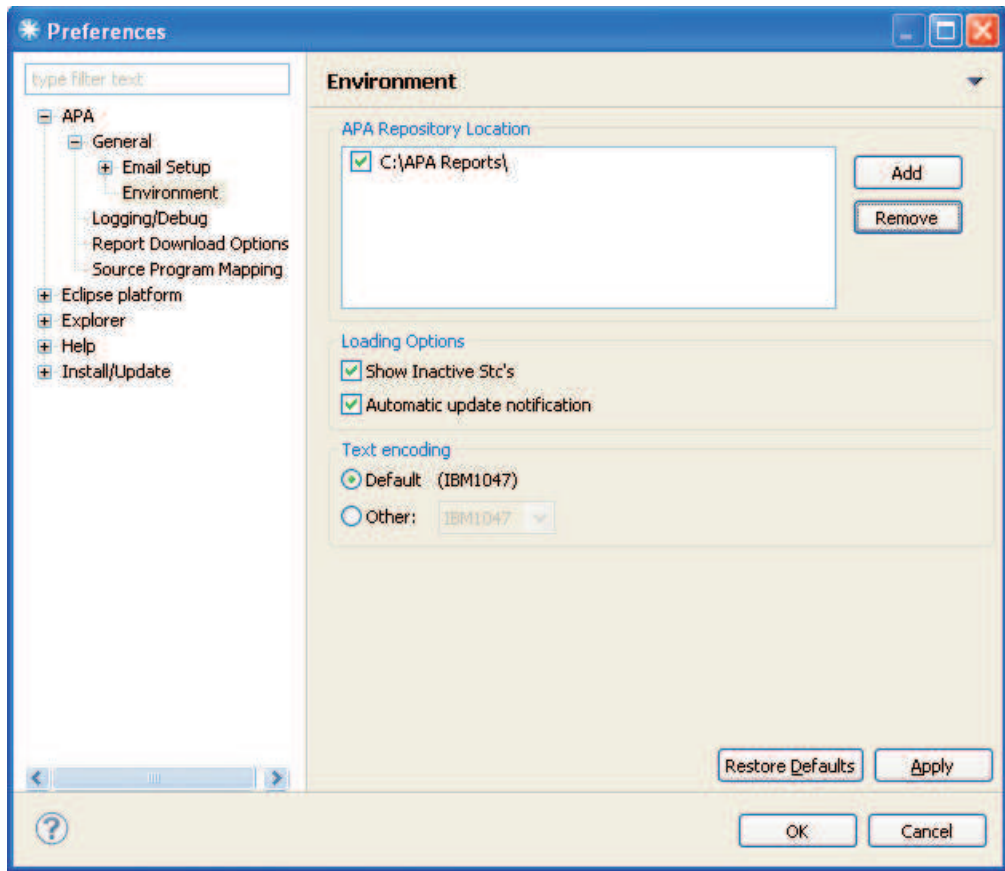


Figure 5. Environment preferences dialog

Table 15. Environment preferences and descriptions

Preference	Description
APA Repository Location	Location for the APA plug-in data (includes downloaded reports).  Default: Workspace location of the launched product.
Show Inactive Stc	Include all STCs which contain data downloaded from z/OS (not just the STCs that were active from the previous connection to z/OS).  Default: checked
Automatic update notification	Check and notify user when updates are available. This is done at connect time.  Default: checked
UnTrusted Host Connection Warning	Uncheck to disable UnTrusted Host Connection Warning Message.  Default: checked
Text Encoding	Codepage to use. Value is one of IBM1047.  Default: IBM1047



## Logging/debug preferences

Logging/debug preferences include property settings for error, warning and information messages along with a debug option to save the downloaded z/OS dataspace. Log messages are written to the `apatrace.log` file, located in the `c:\apa\workspace\metadata` directory, where `apa` is the folder that the Application Performance Analyzer GUI was installed in.

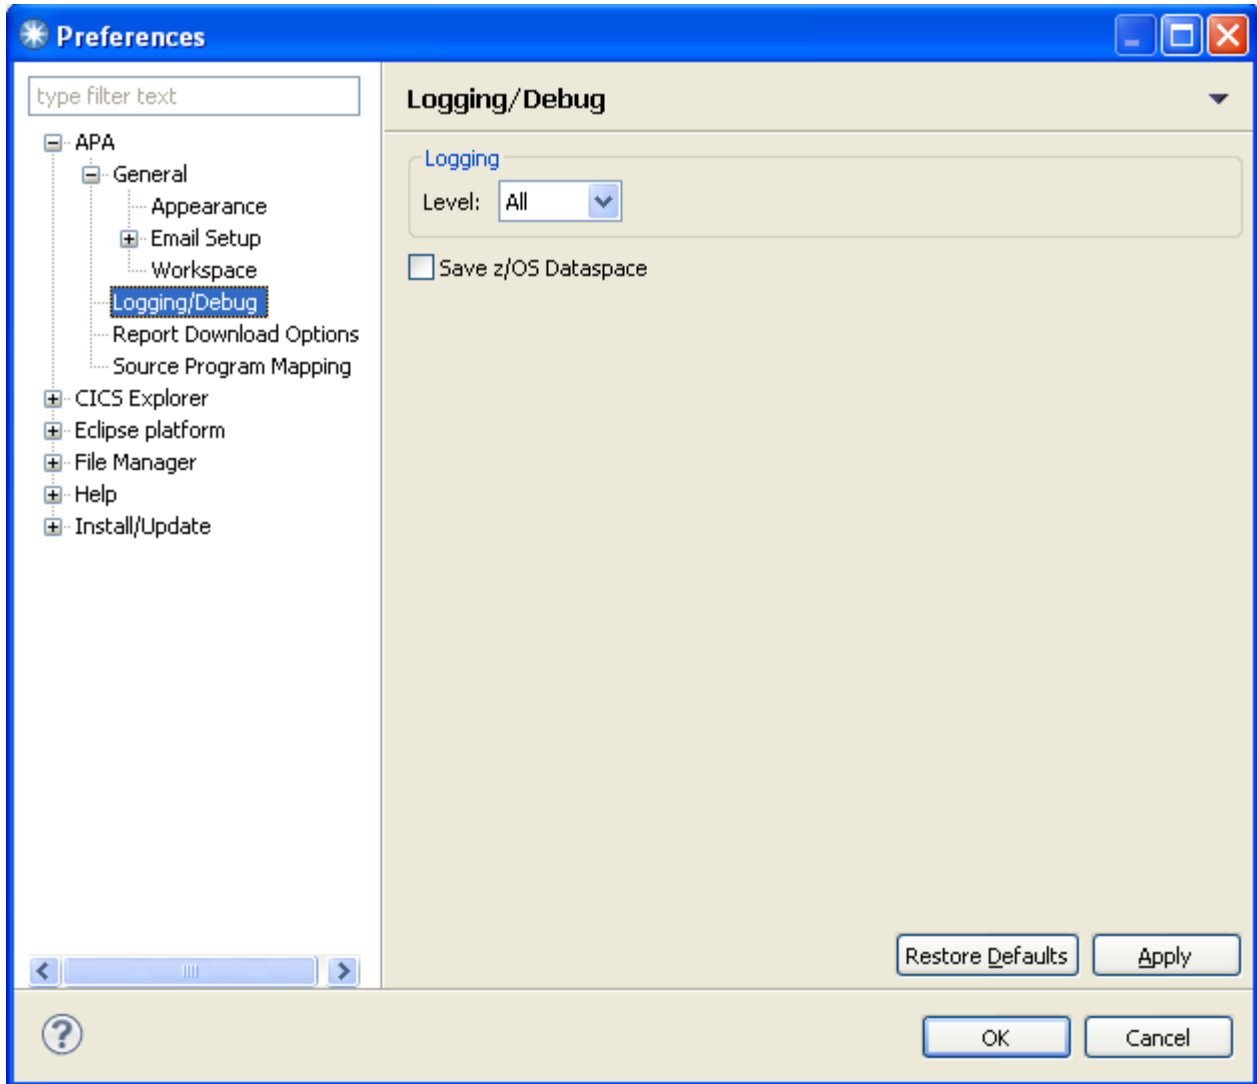


Figure 6. Logging Preferences dialog

Table 16. Logging/debug preferences and descriptions

Preference	Description
Level	Level of error logging. Value is one of: Fatal, Error, Warn, Info, Debug, All, and Off. Default: Info
Save z/OS Dataspace	Save the downloaded z/OS dataspace. This is used for data debugging purposes. Default: unchecked

## Report download options preferences

Report download options preferences include property settings for downloading and viewing reports. The first scrollable list includes all report categories and reports that are available in Application Performance Analyzer to be downloaded. Individual report categories and reports that are to be downloaded, can be selected or unselected from the list.

The second scrollable list, located at the bottom of the window, includes all options for the selected report. Click the Edit button or double-click the option, and an edit dialog window is displayed in which the value can be modified. Any changes are applied to all downloads of the selected report type.

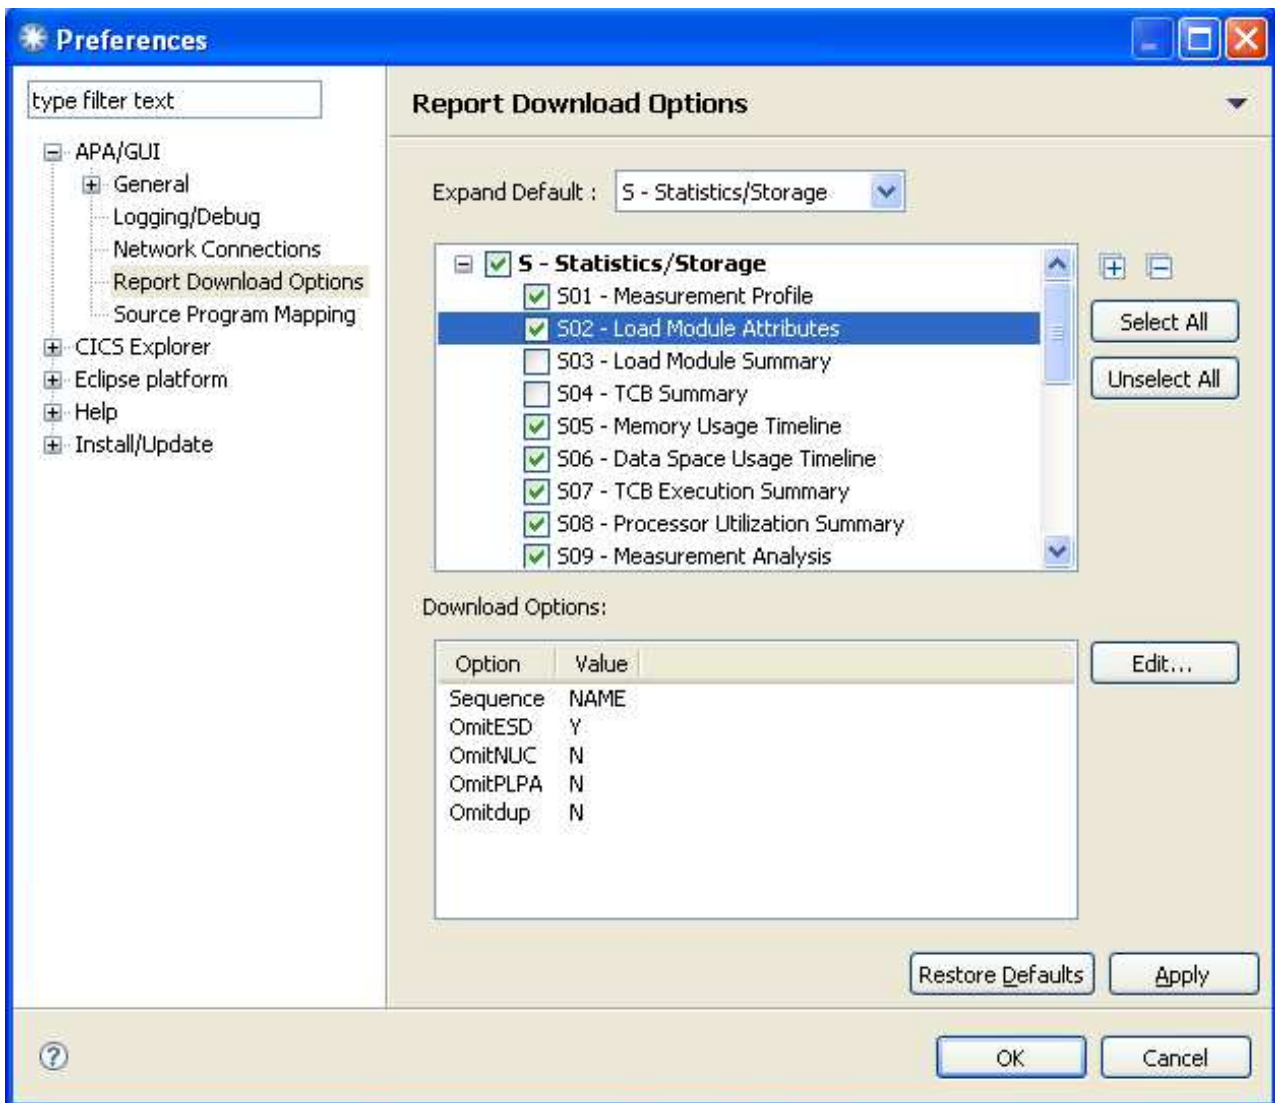


Figure 7. Report download options dialog

The second scrollable list, located at the bottom of the window, includes all options for the selected report. Click the Edit button or double-click the option, and an edit dialog window is displayed in which the value can be modified. Any changes are applied to all downloads of the selected report type.

Table 17. Report download options preferences and descriptions

Preference	Description
Expand Default	Sets which report category will be expanded when the report list is initially displayed.  Default: C – CPU Usage Analysis
Download Options	Report download options – used when reports are downloaded.  Default: System Configuration settings

## Source program mapping preferences

Source Program Mapping preferences include property settings related to downloading and viewing details for a source program.

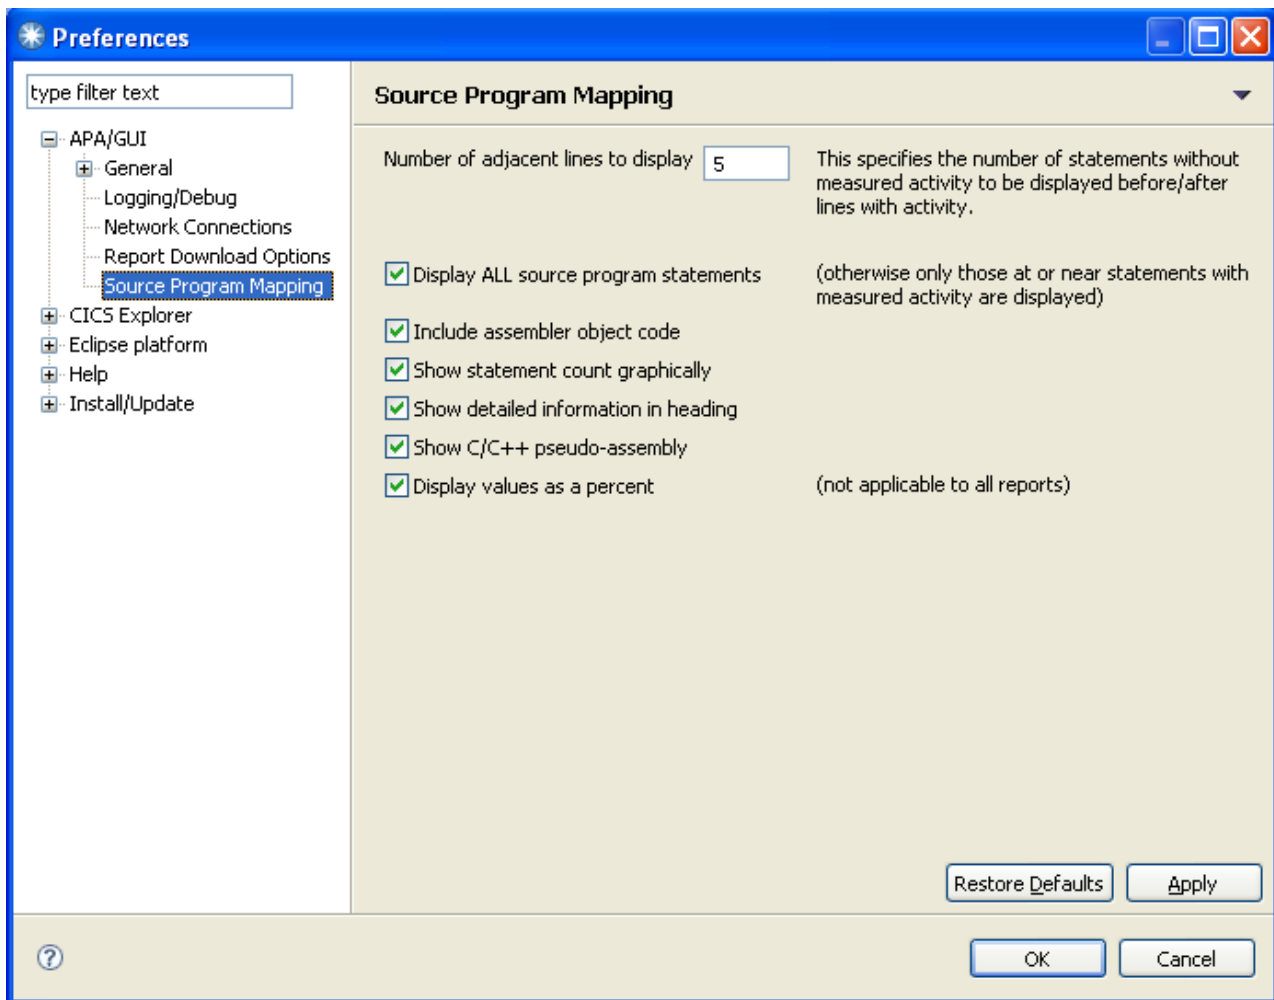


Figure 8. Source program mapping preferences

Table 18. Source program mapping preferences and descriptions

Preference	Description
Number of adjacent lines to display	This specifies the number of statements without measured activity to be displayed before/after lines with activity.  Default: 2
Display ALL source program statements	(otherwise only those at or near statements with measured activity are displayed)  Default: unchecked
Include assembler object code	Includes assembler object code in the display  Default: unchecked
Show statement count graphically	Displays statement count as a graph.  Default: checked
Show detailed information in heading	Includes detailed heading information in the display.  Default: unchecked
Show C/C++ pseudo-assembly	Includes C/C++ pseudo-assembly in the display.  Default: unchecked
Display values as a percent	(not applicable to all reports)  Default: unchecked

## Status line

Located at the bottom of the application window, the status line includes a shortcut tool bar for FastView buttons (left corner) and displays three categories of status information:

- View status (left-side)
- Application status (center)
- Job progress status (right-side)

FastView is a feature that provides docking and undocking of views. If Fastview is selected for a view, its icon is displayed as a button in the shortcut toolbar area of the status line. Refer to “View navigation” on page 736 for details on setting the view as a Fastview.

View status information includes the display of the number of observations and filtering options when the Observations List view is active. The cursor location from the Report View (line, column) is also displayed when a Report View is active.

Application status information includes Local when the local repository is active and Remote when the z/OS Application Performance Analyzer is connected and the remote repository is active. A green dot is displayed for unsecure remote connections and a green dot with a padlock is displayed for secure (SSL) connections. The application status display can be customized in the ‘Appearance Preferences’ to include the TSO id, Host Address and/or Host Port.

Job progress information is displayed when a long-running task is active, for example, downloading data or formatting a large report.

---

## List navigation

Views that display lists of information, such as the STC List, Observations List and Reports List include Expand All, Collapse All, Home, Backward and Forward navigation actions on the view toolbar.

The navigation buttons assist navigation of the list and are activated when a row has children rows. In addition to the toolbar buttons, each row with children displays an expand command, "+" (XP) or ">" (Vista) on the row. When clicked, the row is expanded to reveal the child observations.

Lists include multi-row selection capability. Press and hold the CTRL button and mouse click each desired row, then when all target rows are selected, click the right-mouse button, select the action and it will be applied to all selected rows. The same applies if the Shift button is pressed instead of CTRL, except all rows between the first clicked row and the next clicked row are selected.

### Expand all



Expand all. Expands all collapsed rows (parent rows with children), so the full tree is displayed.

### Collapse all



Collapse all. Collapses all expanded rows (parent rows with children) so only the parent row is displayed (the tree is collapsed).

### Home



Home. Home swaps the list items to display the original list.

### Backward



Backward. Backward swaps the list items to display the previously displayed list.

### Forward



Forward. Forward swaps the list items to display only the children of the selected row.

---

## View navigation

All views can be closed, moved, viewed with Fastview, detached, re-attached, minimized and maximized. Right-click the view tab and the context menu displays navigation actions for the view.

The Detach action detaches the view and changes it into a separate popup dialog displayed on top of the Application Performance Analyzer GUI. It can be re-attached to the Application Performance Analyzer GUI by right-clicking the view tab and selecting detach a second time from the context menu of the popup.

The view can also be minimized to the Shortcut toolbar area of the status line by selecting FastView. An icon is displayed for each view that is minimized via Fastview.

---

## STC list view

The STC (Started Task) list view, displayed at the top left-side of the Application Performance Analyzer GUI, lists all active Application Performance Analyzer tasks started on the sysplex for which the connection was established. This view, by default, is not displayed at startup, but can be opened by selecting Window, Show View, STC View. The active STC is pre-selected. You can change STCs by clicking on a different started task. The desktop will be refreshed to show the changed STC properties, Observations List and Observation Detail views.

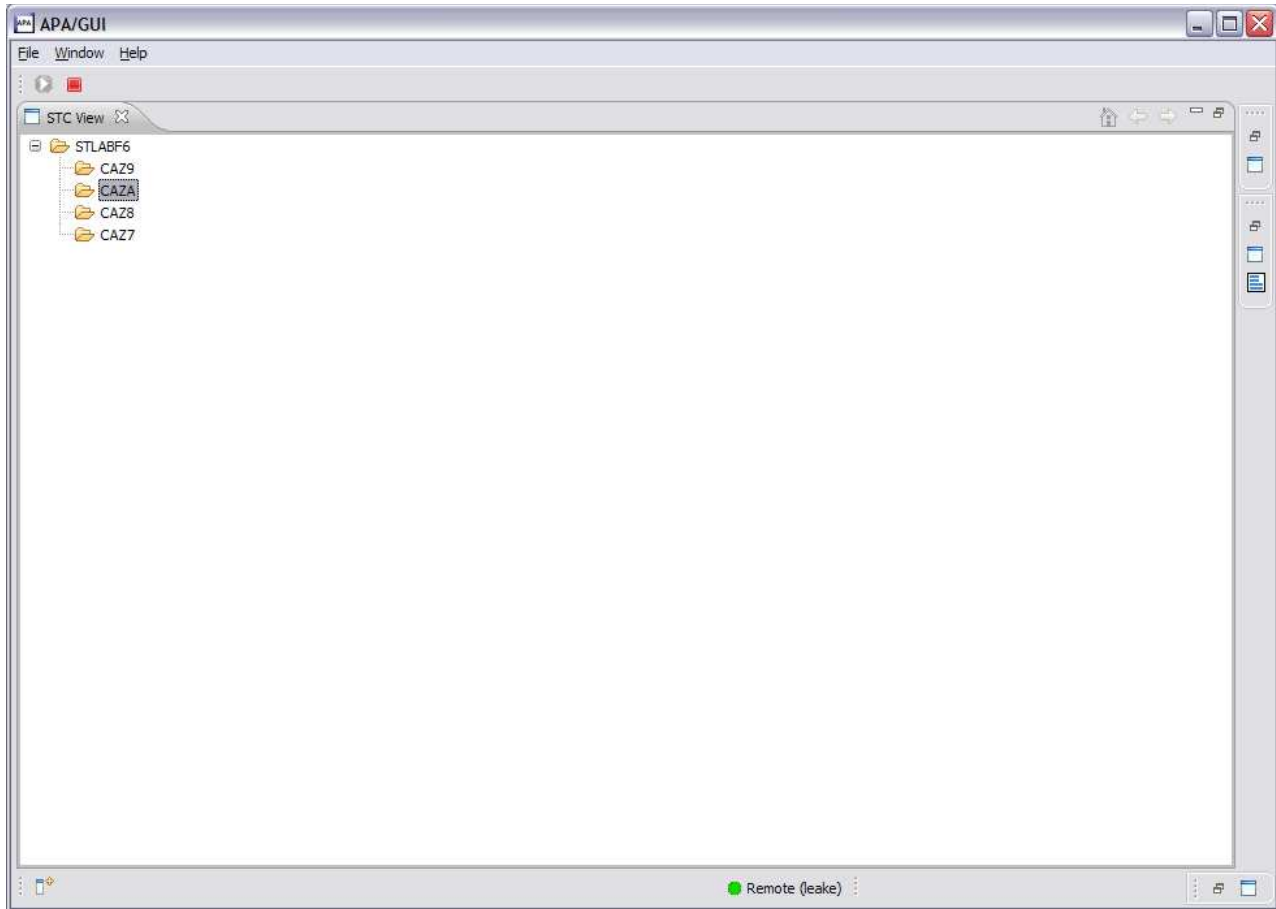


Figure 9. STC list view

## Context menu

The STC List context menu is accessed by a right-mouse button click on a started task. It provides STC (row) level actions which include:

- Set as Default STC
- Mapping Repository

### Set as Default STC

Set as Default STC changes the Application Performance Analyzer/GUI default STC.

### Mapping Repository



The Mapping Repository launches the Source Program Mapping Repository editor dialog. The editor provides an interface to manage files/directories of source program listings used for the source program mapping display feature of individual reports.

The repository is segmented into two lists: Libraries and Directories. Libraries are listing data sets located in the MVS environment. Directories are paths for listings located in the Unix System Services – USS environment.

A mapping repository of Libraries and Directories is defined for each started task (STC). As the repositories are resident in the z/OS environment, this action is only available if the z/OS connection has been established, the remote repository is active, and the common data store (CDS) has been enabled during Application Performance Analyzer for z/OS installation.

**Libraries repository:** The Libraries Repository maintains two types of listing dataset lists; Personal and Common. Personal lists are unique to the User within an STC, where up to 20 datasets may be defined. Common lists are included for all Users within an STC. Only Users with Administrative access authorization may edit this list, where up to 50 datasets may be defined. The Source Program Mapping feature searches libraries in your Personal list first, followed by the libraries in the Common list. If the source is not found, an error message is displayed.

Individual datasets can be added, copied, deleted and moved up or down in the list. Additionally as a bulk feature, rows selected from the list can be copied to the Windows clipboard and new datasets added directly from the clipboard. The z/OS repository is updated once the 'OK' button is clicked.

The Personal list of libraries provides function equivalent to the ISPF "A04 - Source Mapping Dataset List" function. However, the indicator to "Match on Compile Date & Time" is not available in the GUI, and the default of 'No' is always used. Application Performance Analyzer for z/OS synchronizes your Personal list in the GUI with your "A04 – Source Mapping Dataset List" in ISPF.

The Common list of libraries provides function equivalent to the ISPF "A05 - Source Mapping Common List" function. While all users can view the Common list, access to update the Common list is restricted to users with Administrative access authorization. Application Performance Analyzer for z/OS synchronizes the Common list in the GUI with the "A05 - Source Mapping Common List" in ISPF.

**Note:** A 3rd party repository type ("Third Party") can only be used if the CAZRХОEM clist has been customized for use.



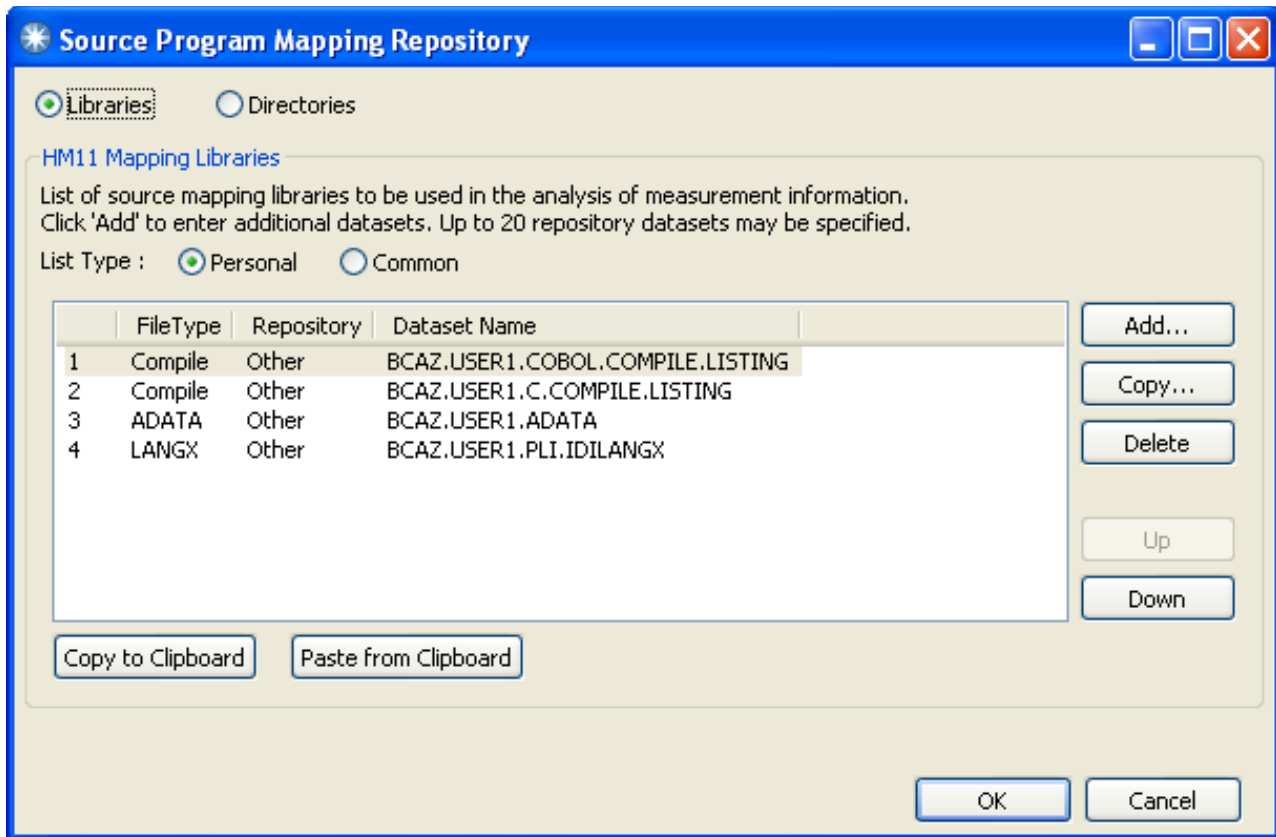


Figure 10. Personal libraries repository

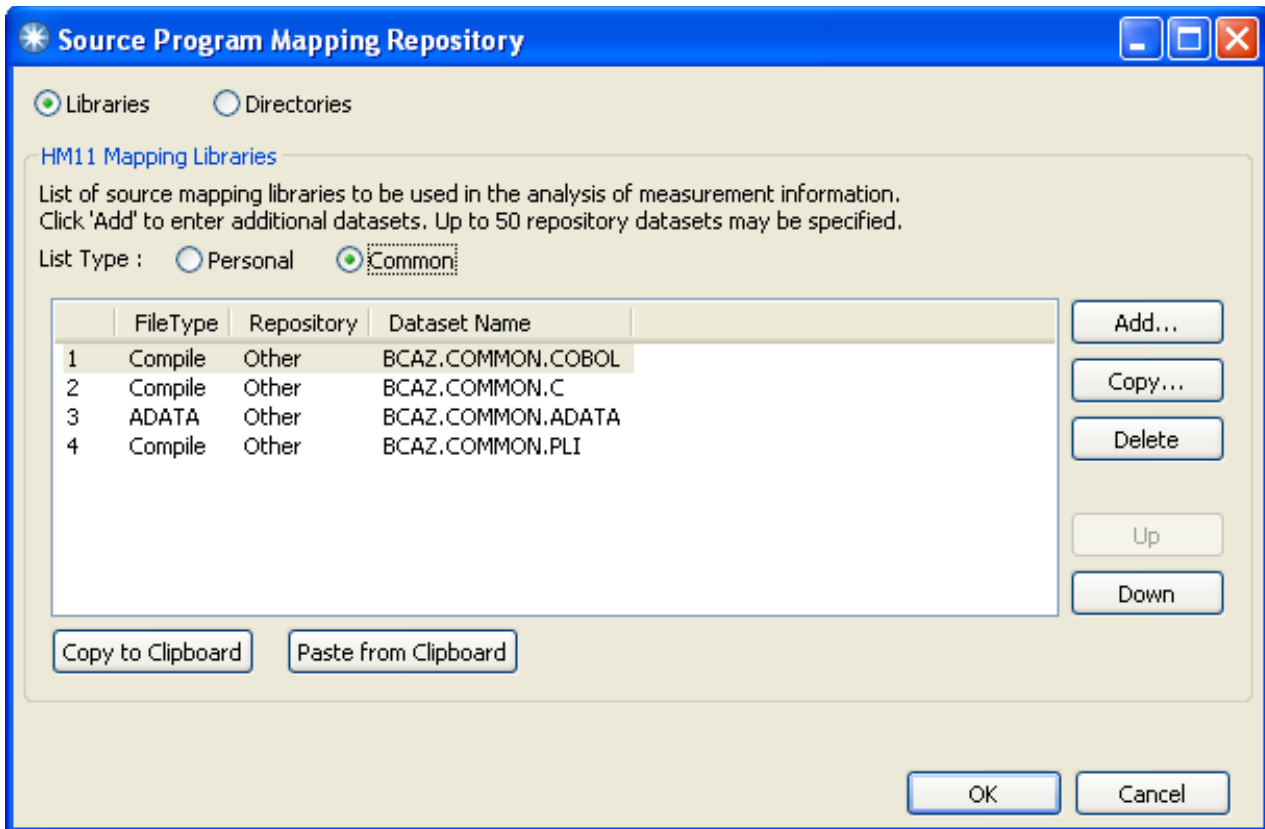


Figure 11. Common libraries repository

**Directories repository:** The Directories Repository is used for source mapping Java programs. It maintains your personal directory list for directories related to either individual Observation request numbers or global for all Observation requests within an STC. It is unique to each user. Up to 99 directories may be defined. Each directory path is assigned an ID-ReqNum and Sequence number. The ID-ReqNum is formatted where the ID is the STC and ReqNum is the Observation request number ("0000" for global) for the directory. The sequence number is unique within each ID-ReqNum and defines the search order for the directories in the list.

Individual directories can be added, copied, deleted and moved up or down in the list. Additionally as a bulk feature, rows selected from the list can be copied to the Windows clipboard and new directories added directly from the clipboard. The z/OS repository is updated once the 'OK' button is clicked.

Application Performance Analyzer for z/OS synchronizes your Directories Repository in the GUI with your "A03 - Java Source Program Mapping" information in ISPF.

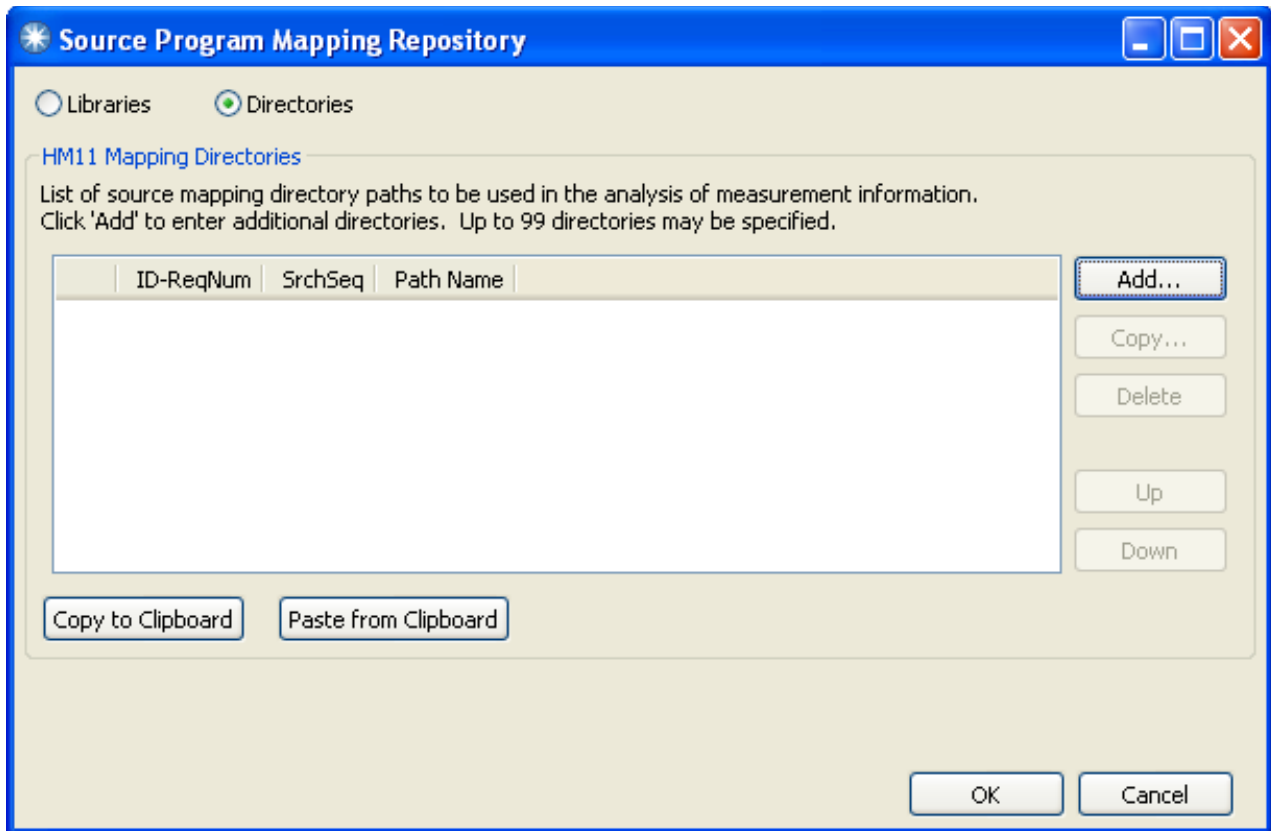


Figure 12. Directories repository

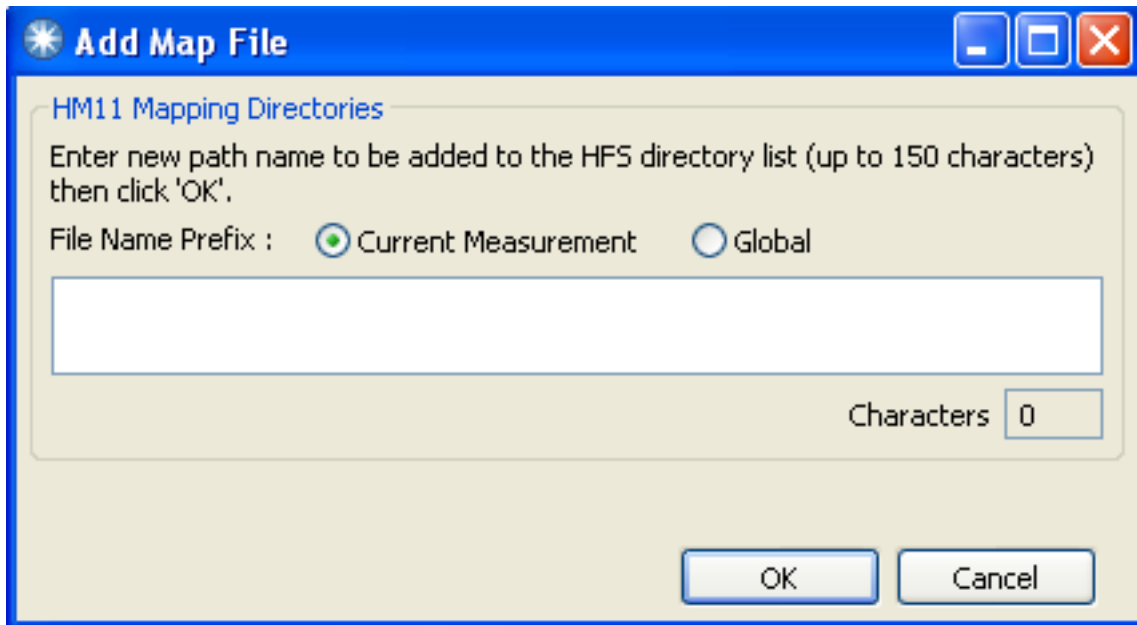


Figure 13. Directories repository – Add Map File

---

## STC Properties view

The STC (Started Task) Properties view, displayed at the bottom left-side of the Application Performance Analyzer GUI, lists all properties for the selected (active) STC. This view is opened when the STC List view is opened and is closed in conjunction with close of the STC List view.

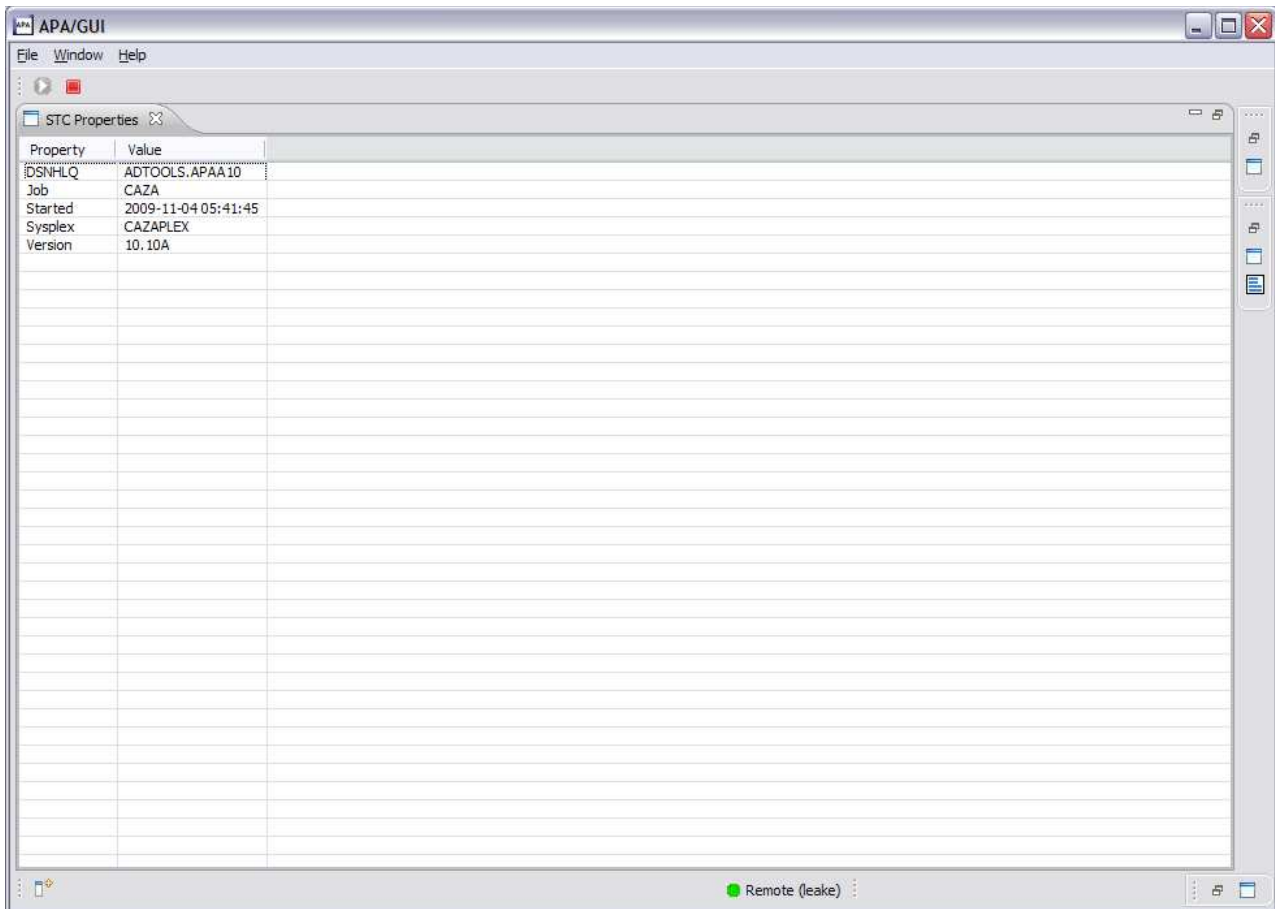


Figure 14. STC Properties view

---

## System Properties view

The System Properties view, displayed at the bottom left-side of Application Performance Analyzer, lists all properties for the selected (active) System. This view is opened when the System is selected from the STC List view.

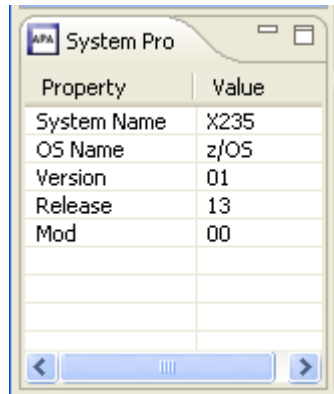


Figure 15. System Properties view

## Observations List view

The Observations List view, located at the top center of the Application Performance Analyzer GUI, lists all observations for the selected (active) STC, sequenced based on the User Preference. This view includes a toolbar, sortable columns and a row-specific context menu. The tab title for this view displays the active started task for the list with either Local, indicating the local repository is active, or Remote when the remote repository is active.

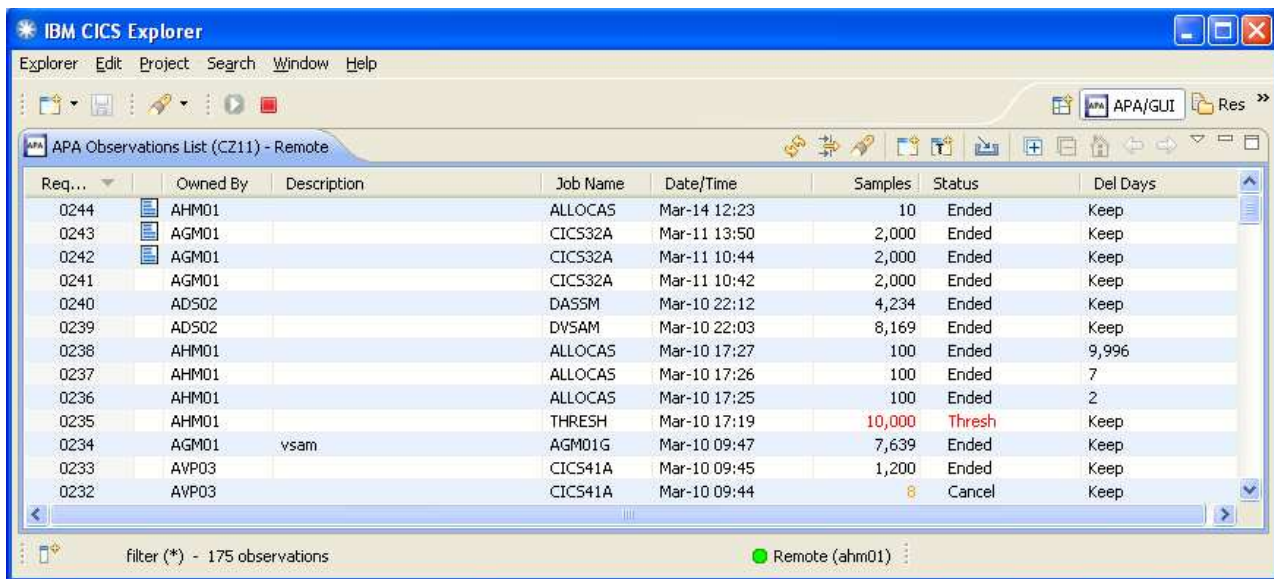


Figure 16. Observation List view

Each row represents an individual observation and includes the Request Number, Reports Downloaded, Owned By, Description, Job Name, Date/Time of the Observation, number of Samples taken, Observation Status and the Delete Days (number of days before the observation will be deleted).

If the observation is a parent with children, the display default contains the observations list collapsed. An expand command, "+" (XP) or ">" (Vista), is displayed, which when clicked, expands the row to reveal the child observations.

A reports icon is displayed on each row where reports for an observation have been downloaded. A sticky note icon is displayed on each observation request row which has a sticky note. Double-clicking the observation row will launch the sticky note dialog, where comments may be entered and the sticky note saved, printed, or deleted. A context menu is available for each observation. Right-click on the row of the desired observation and the list of available menu actions is displayed. Refer to “Context menu” on page 766 for details.

For each observation list row that is selected, the Observation Detail and Observation Reports List views are updated to the active (selected) request. Refer to “Observation Detail view” on page 773 and “Observation Reports List view” on page 774 for details. Refer to “R02 - Observation session list” on page 8 for details of the individual fields.

## Toolbar

The Observations List toolbar provides buttons for view-level actions that include: Refresh Observations List, Filter Observations List, Search Observations, New Observation, New Trigger Observation, and Import Observation. Additionally, common navigation actions are available including Expand All (expand all observations) and Collapse All (collapse all observations). The toolbar includes a Local Pull Down button, a down arrow icon, located at the far right-side of the toolbar. The pull down provides an alternative path to many of the toolbar actions.

## Refresh observations



Refresh Observations reloads the Observations List view with observations retrieved and downloaded from the z/OS remote repository.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Filter observations



Filter Observations provides the functionality to filter the Observations List. A dialog is displayed where the filter pattern is entered. Observations can be filtered by Owned By or Job Name values and the results sequenced by any one of the Observations List column types.

Once the OK button is clicked, all observations matching the filter pattern are downloaded from z/OS and the Observations List refreshed with the new list of observations. A filter pattern of “\*” indicates no filtering will be applied to the specified field.



Figure 17. Filter Observations dialog

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Search observations



Search Observations provides a tool to scan the list of observations for a given search string and return a list of matching results. A dialog is displayed in which the search string is entered. Additional filtering can also be specified, including limiting the search to one of the Observation List column types, setting a date range, limit the request number range and/or limit by sample size.

Once the OK button is clicked, all observations matching the search pattern are searched. The Search Results View is opened and the results displayed. Refer to “Help Search view” on page 797 for details of the search results.

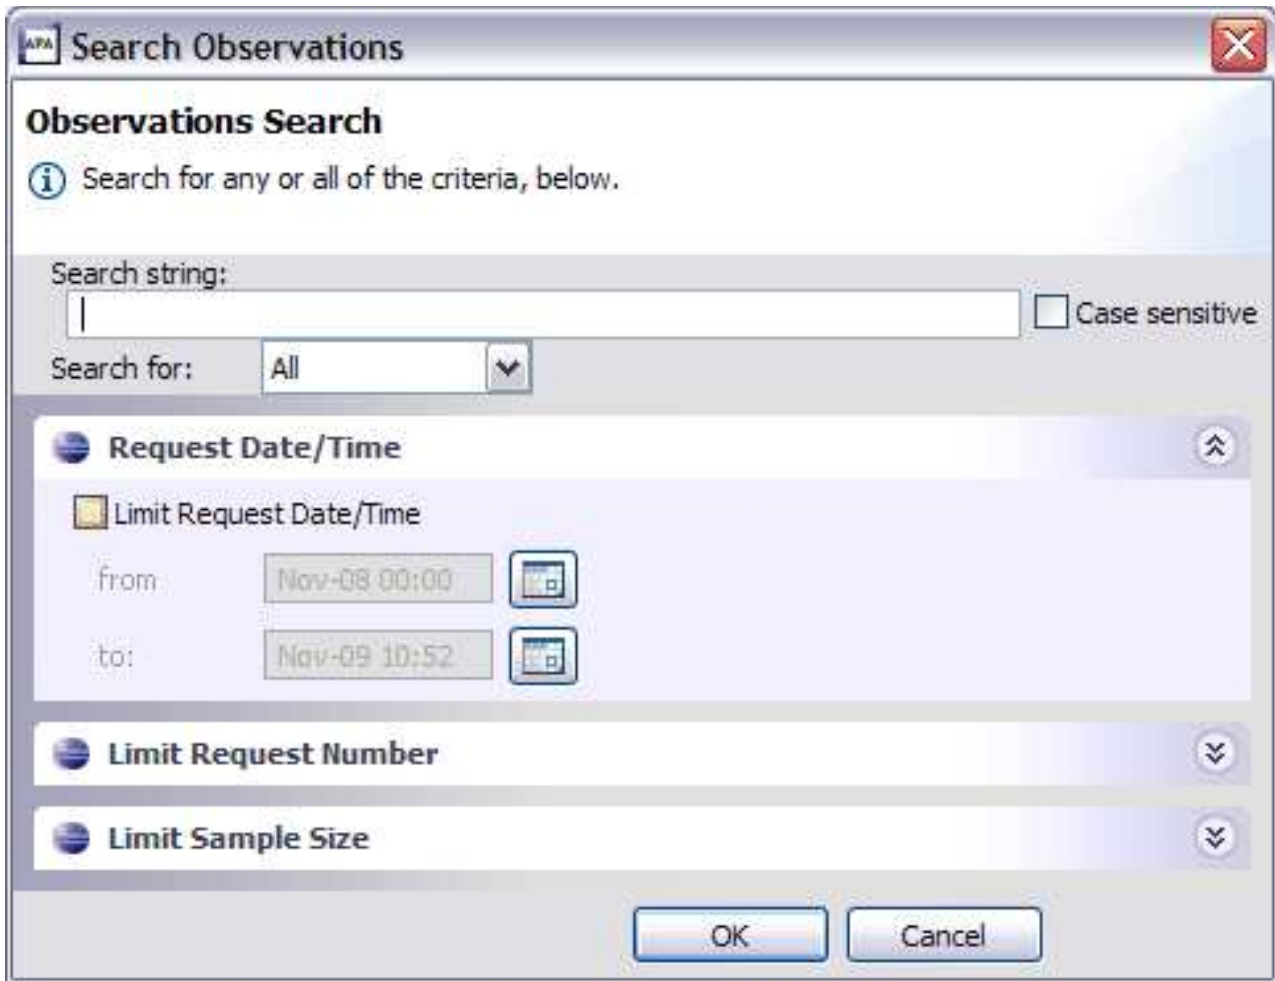


Figure 18. Search Observations dialog

## New observation



New Observation provides the functionality to create and submit a new observation to Application Performance Analyzer. A dialog is displayed where the details of the new observation must be provided.

The New Observation dialog is initially structured with seven tabs in which detailed request specification information can be entered. Each tab name is preceded by a symbol indicating if data has been entered to the tab. The symbol is displayed in green (green light) if data has been entered and is error free. A yellow or red light is displayed if there are warnings or errors in the data. The yellow warning lights may be suppressed by selecting the 'Suppress warnings on input fields' checkbox in the General Preferences dialog. Refer to "Entering an observation request" on page 15 for details of the individual fields and edits.



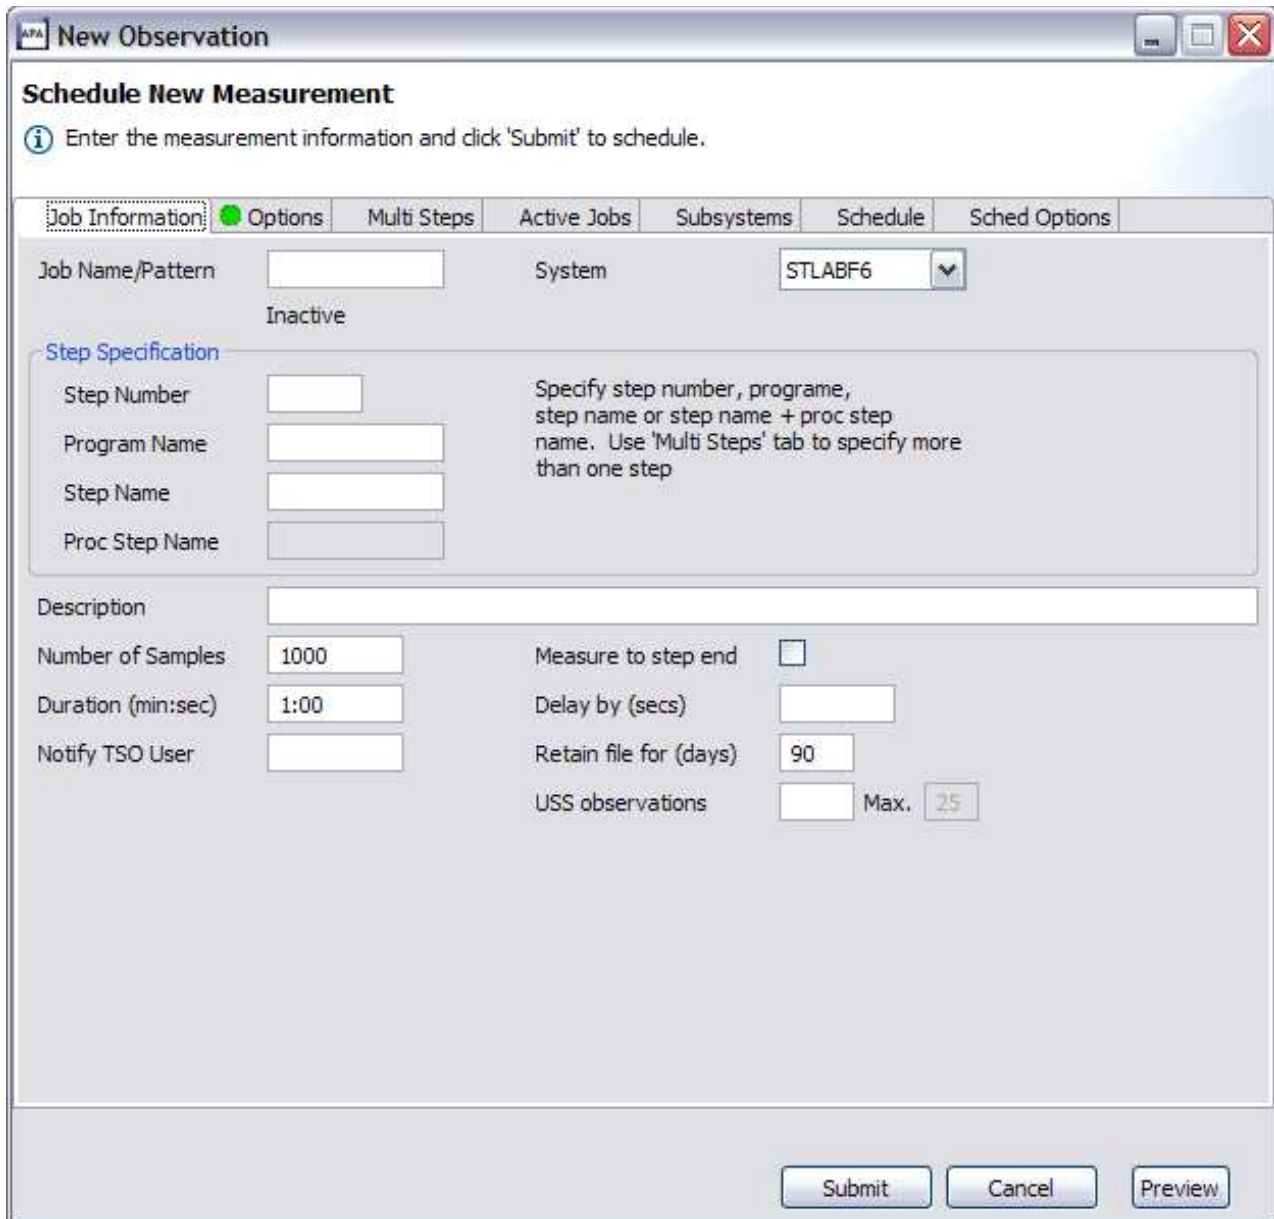


Figure 19. New Observation dialog

If a dash (“-”) is entered in the job name field (Job Information tab), a DB2-specific or an IMS Multiple Address Space observation is created. The New Observation dialog is restructured with only three tabs including the Job Information (with limited fields), Options and Subsystems, where the DB2 radio button fields are activated by default. The IMS radio button is also enabled, where, if selected, IMS Multiple Address Space parameters are entered.

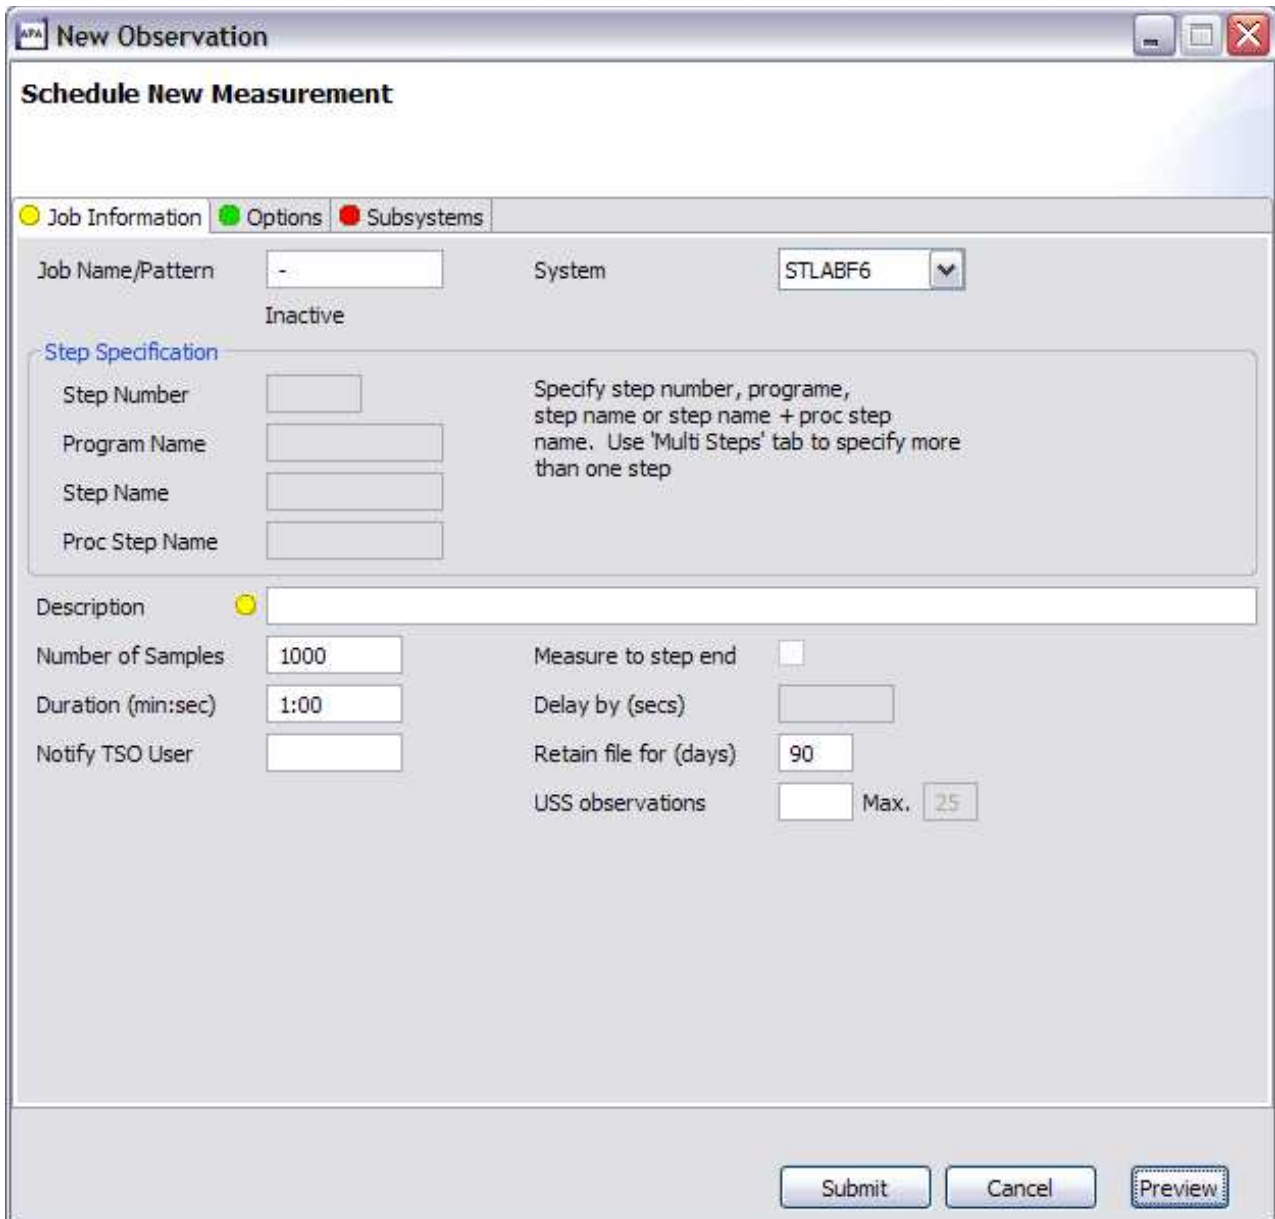


Figure 20. New Observation (DB2-specific or IMS Multiple Address Space) dialog

The Preview button can be clicked at any time to view the request parameters as they are being built. Once the required data has been entered and green light(s) are displayed, the request is valid and ready to be submitted. Once the Submit button is clicked to submit the request, the Observations List automatically displays the new observation on the list.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### Job Information tab

The Job Information tab includes job-related parameters for the new observation request. If the started task is part of a sysplex, a System dropdown listing the images in the sysplex is displayed. Otherwise, the dropdown is hidden. An entry field colored grey cannot be edited.

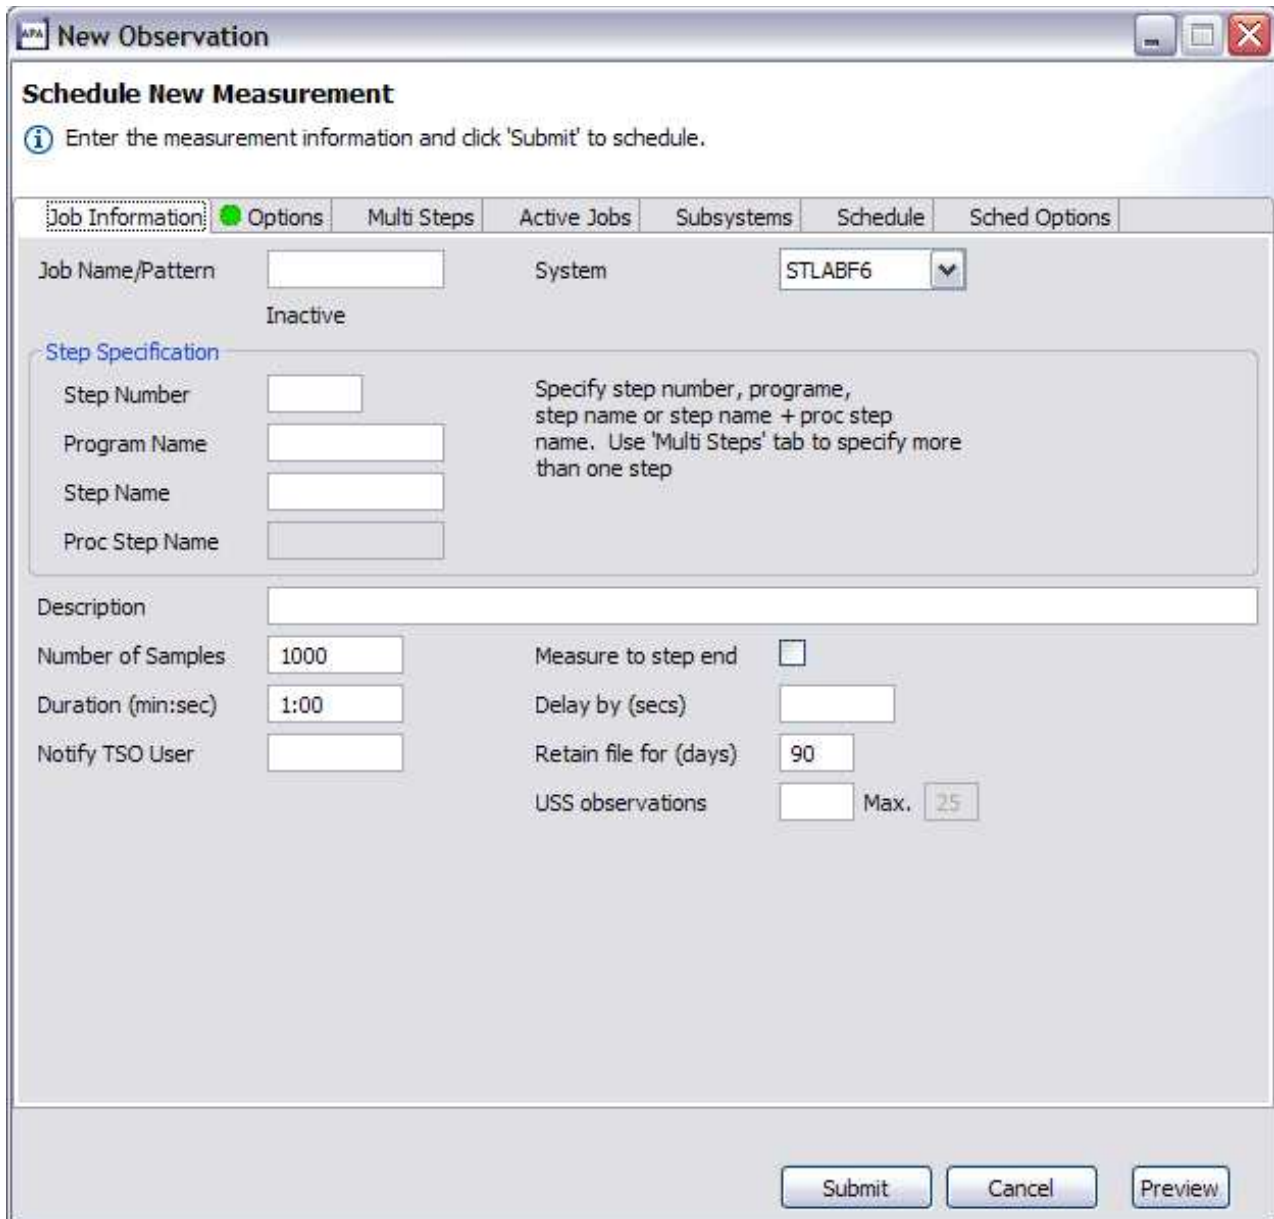


Figure 21. Job Information tab

Refer to “Panel 1 – Job Information” on page 17 and “Panel 6 – Sysplex” on page 37 for details of the individual fields and edits.

### Options tab

The Options tab is used to enter extended measurement options (Data Extractors), and also to specify additional load libraries to be searched for external symbol information. Click the Directories radio button to enter additional HFS Directories. Both the load libraries and directories are validated real-time on the z/OS server.

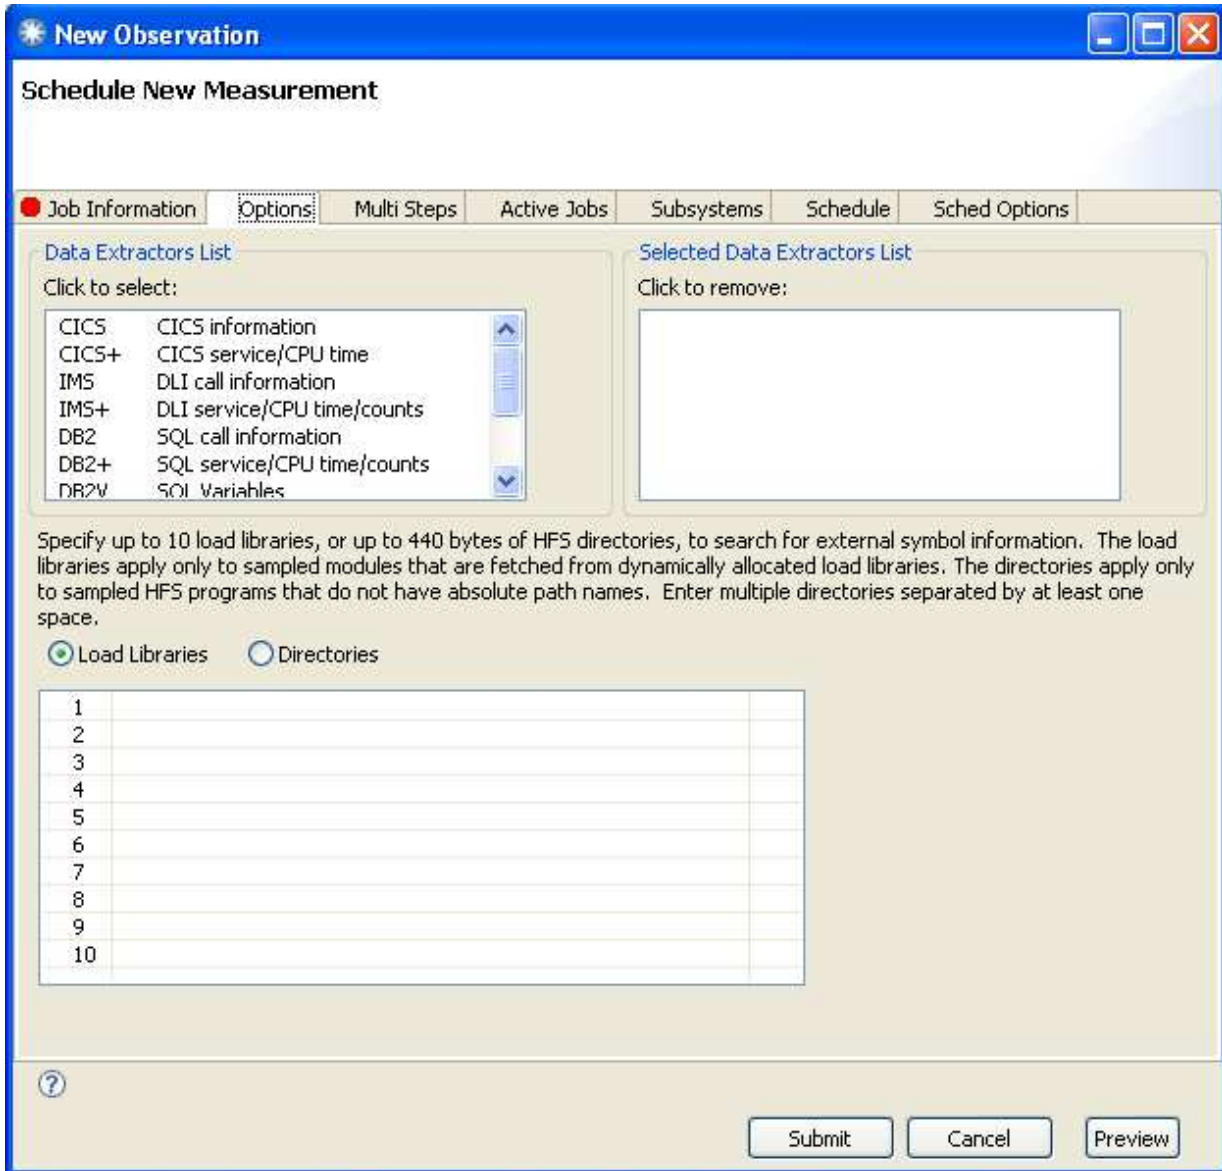


Figure 22. Options tab

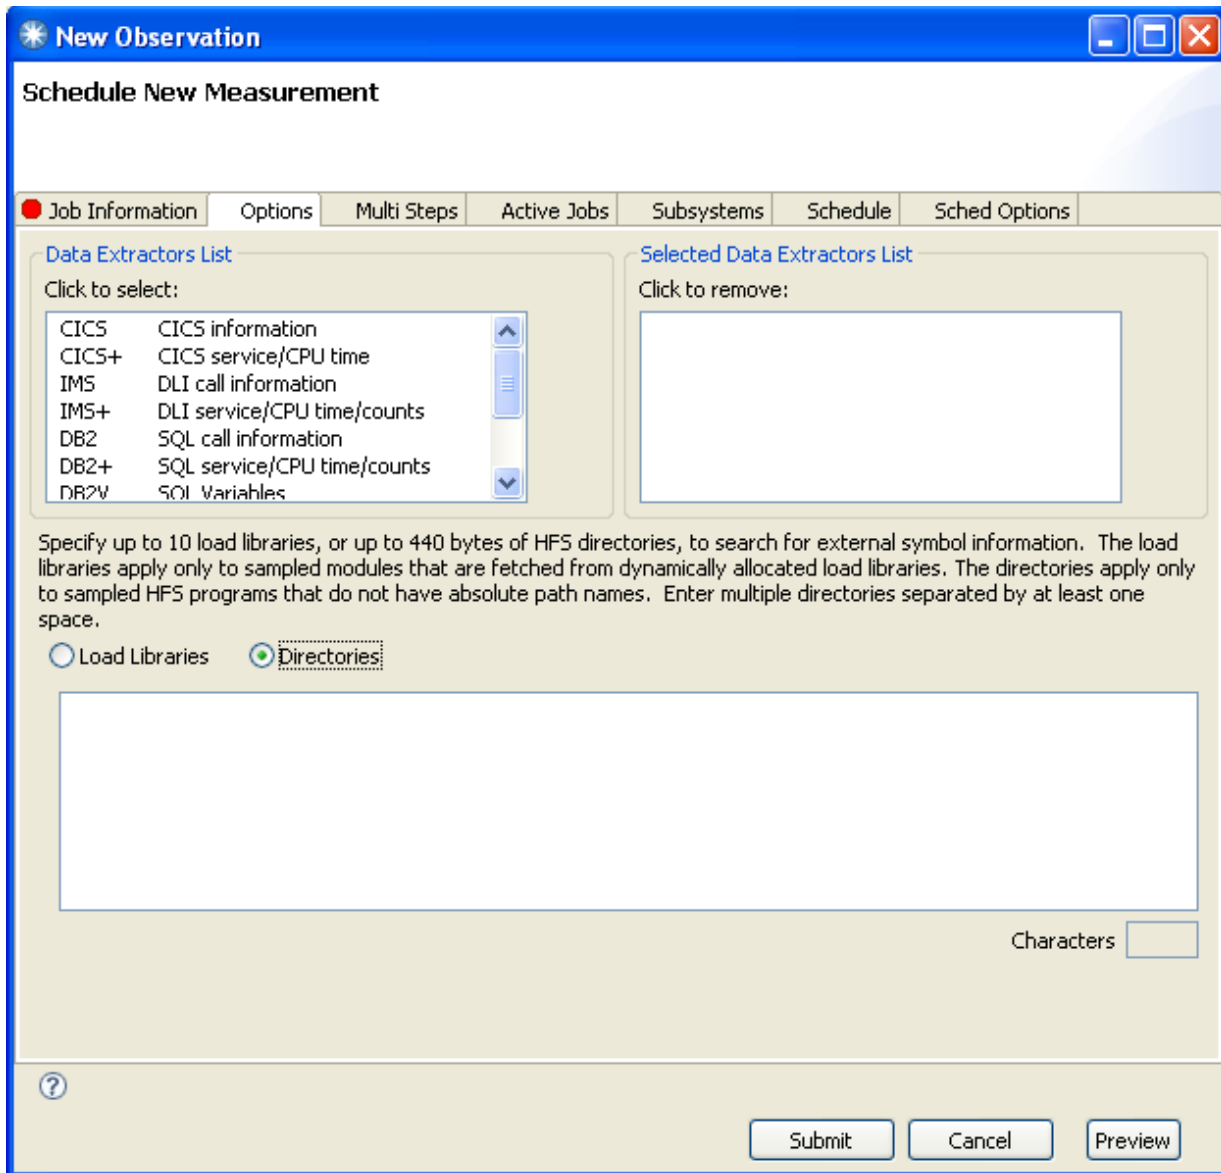


Figure 23. Options tab

Refer to “Panel 2 – Options” on page 22 for details of the individual fields and edits.

### Multi Steps tab

The Multi Steps tab is used to specify that multiple job steps are to be measured. Up to 20 steps can be measured, using the same specification rules described for single step measurements entered in the Job Information tab.

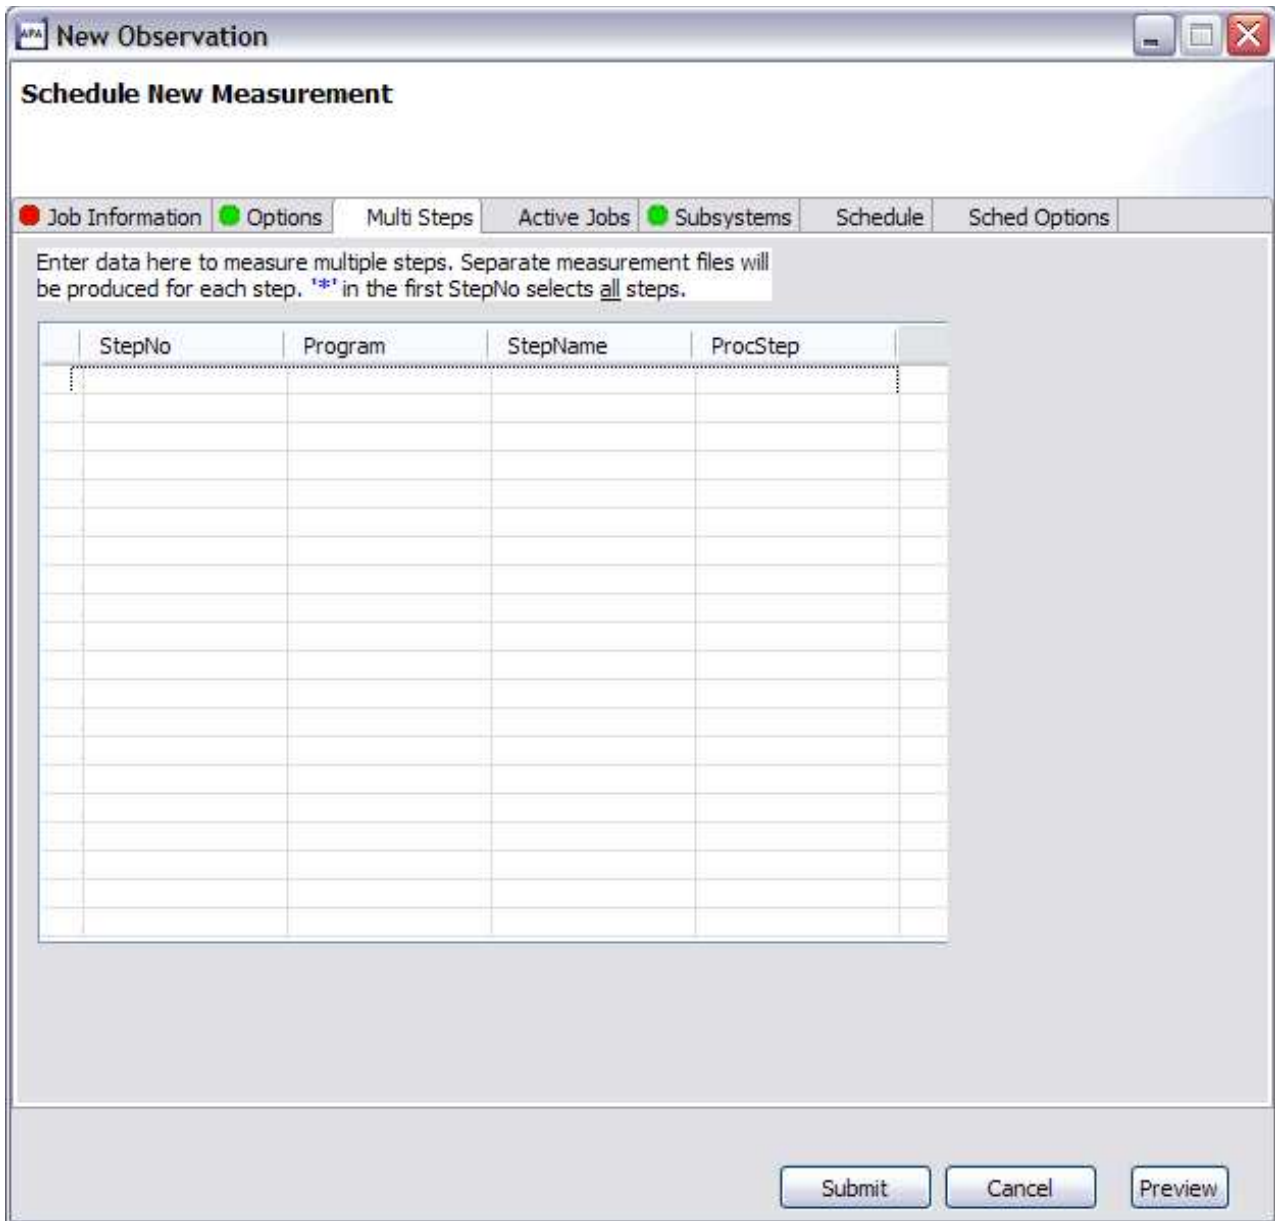


Figure 24. Multi Steps tab

Refer to “Panel 3 input fields” on page 29 for details of the individual fields and edits.

**Active Jobs tab**

The Active Jobs tab is used to select active jobs from a list. A Prefix can be entered to limit the jobs listed. If you enter a Pattern in the Job name/Pattern field from the Job Information tab, this is entered as the Prefix in the Active Jobs tab. The z/OS server is accessed real-time to return the list of active jobs that are displayed in the Active Jobs List section. All selected jobs are displayed in the Selected Jobs List section. Up to 20 jobs or the system configuration value can be selected.



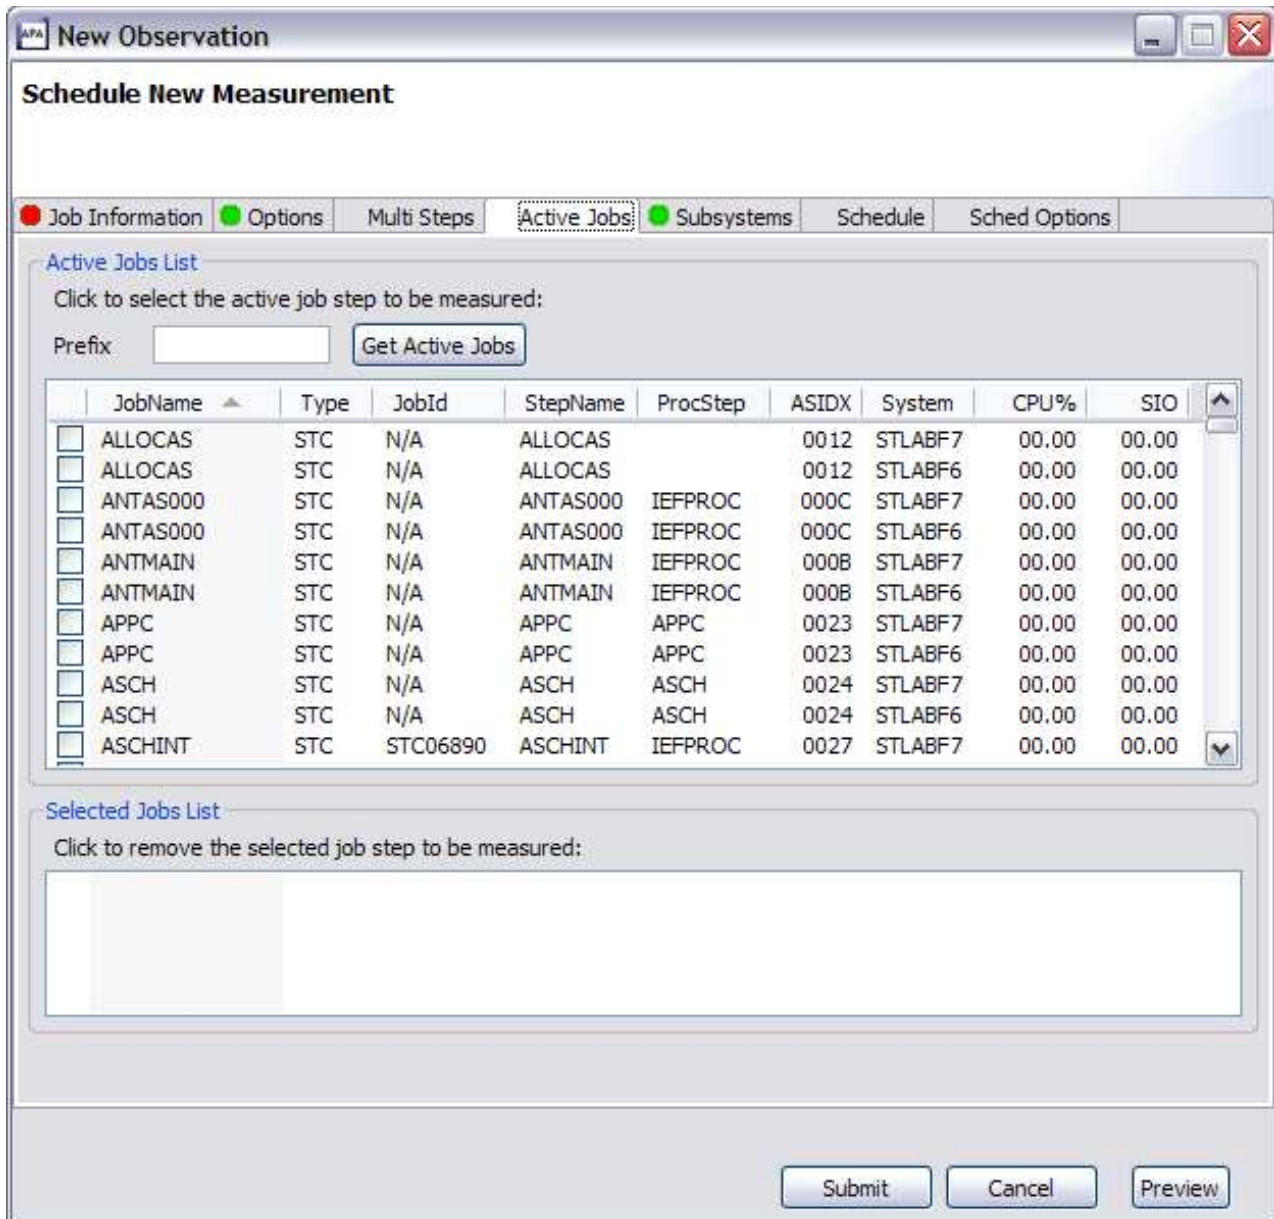


Figure 25. Active Jobs tab

Refer to “Panel 4 – Active Jobs” on page 29 for details of the individual fields and edits.

### Subsystems tab

The Subsystems tab is used to specify information about the measurement of a CICS region, IMS selection parameters, DB2 parameters, DDF selection criteria, or WebSphere Application Server (WAS) filter criteria.

Click on the CICS radio button to enter the CICS transaction codes or terminals for which CICS measurement information is to be recorded.

Click on the DB2 radio button to enter a specific DB2 stored procedure or user defined function for which measurement information is to be recorded.

Click on the DDF radio button for DDF measurement criteria which includes Correlation Id, End User Id and Workstation Id. Nulls are allowed (checkbox) and any of the DDF entry fields can be prefixed or suffixed with an “\*”. “%” is also allowed.

Click on the IMS radio button for IMS measurement parameters. A transaction, program name, and user ID to limit the measurement information can be entered.

Click on the WAS radio button for Websphere Application Server filter criteria which includes filtering by Request Name, Application Name Origin, Extension type(s) and image files. Wildcards (“\*”) are accepted. Extension types must be prefaced by a period (“.”) and each extension separated by a space.

DB2 and IMS Multiple Address Space fields are only enabled if a dash (“-”) is entered in the job name field (Job Information tab). Application Performance Analyzer will display different fields on the Subsystems tab, depending on the radio button selected.



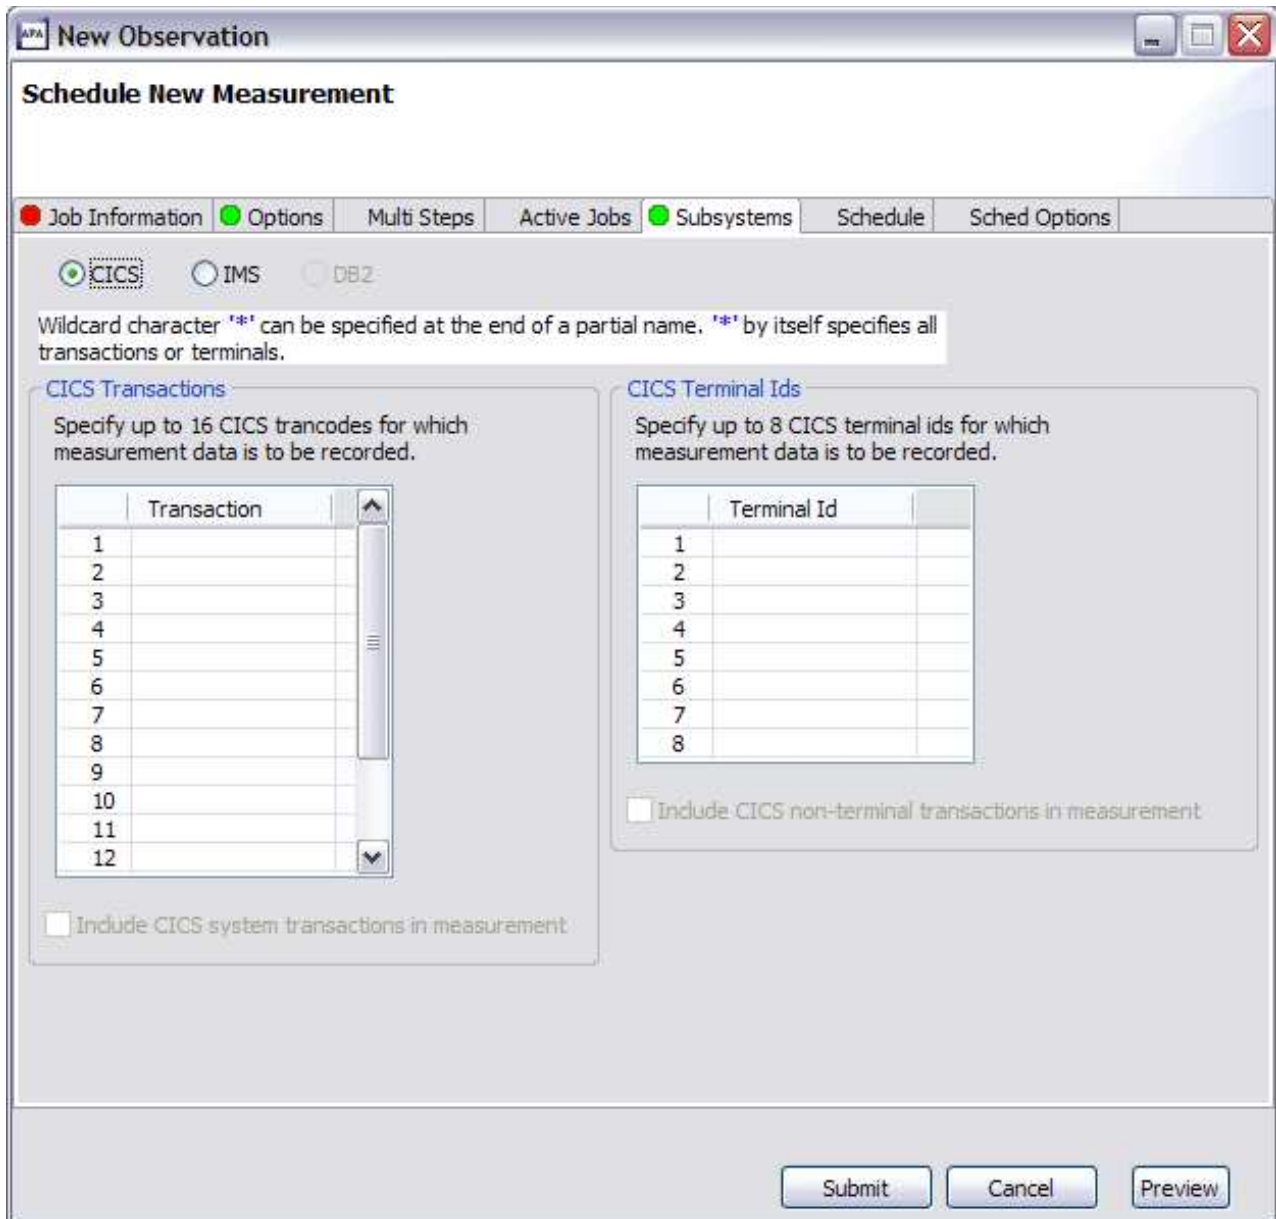


Figure 26. Subsystems tab - CICS option

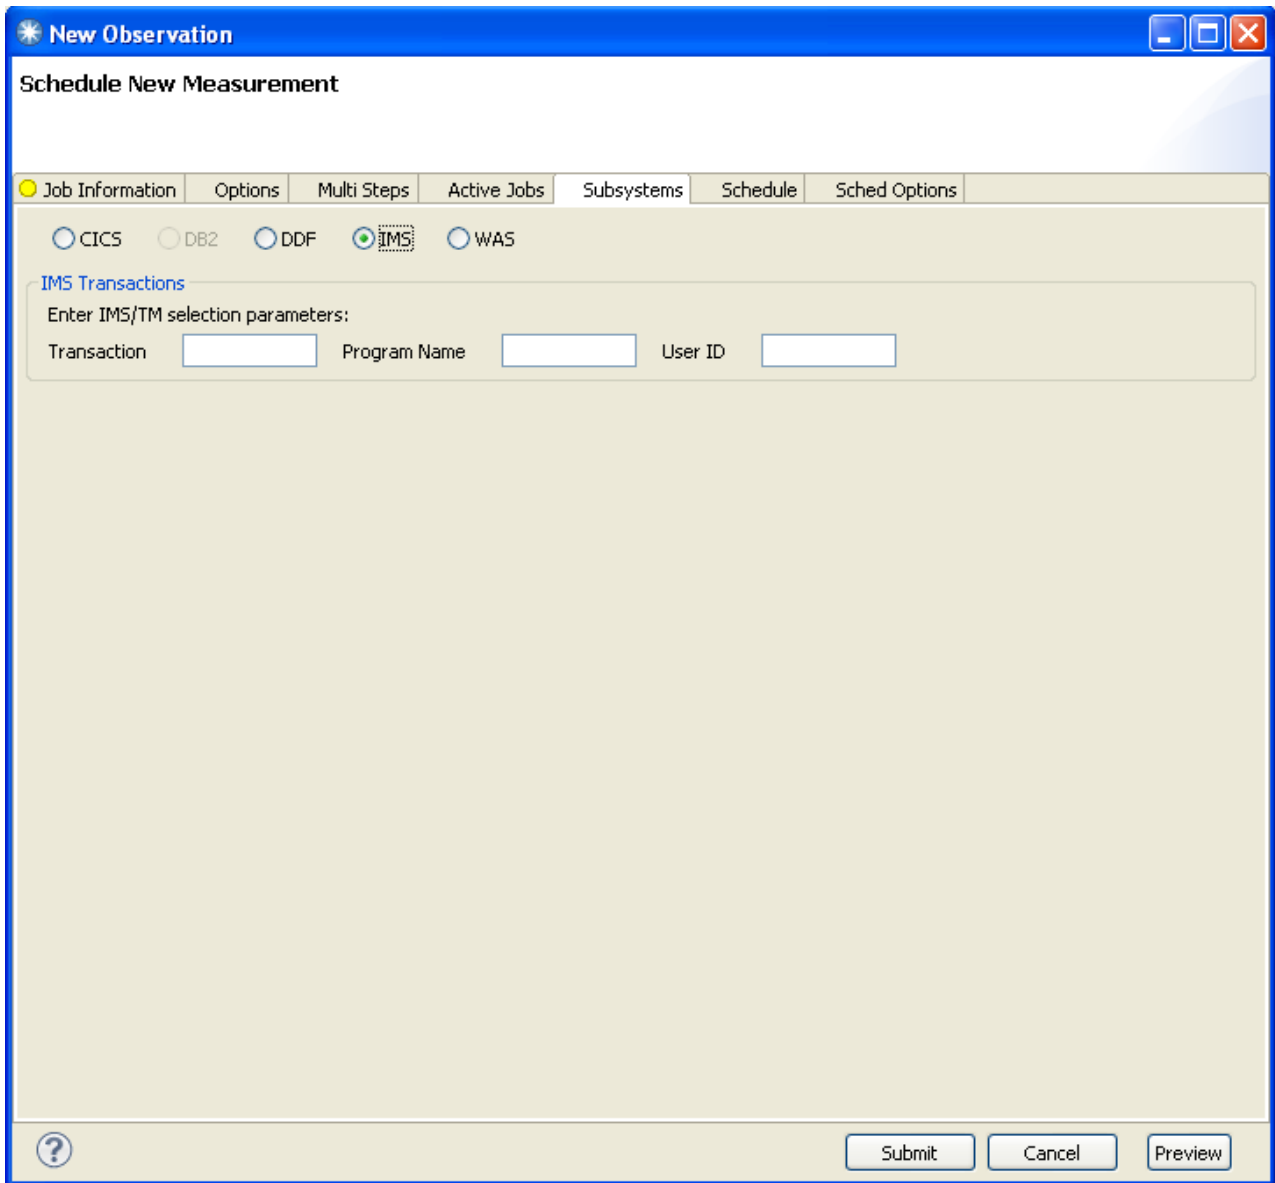


Figure 27. Subsystems tab - IMS option

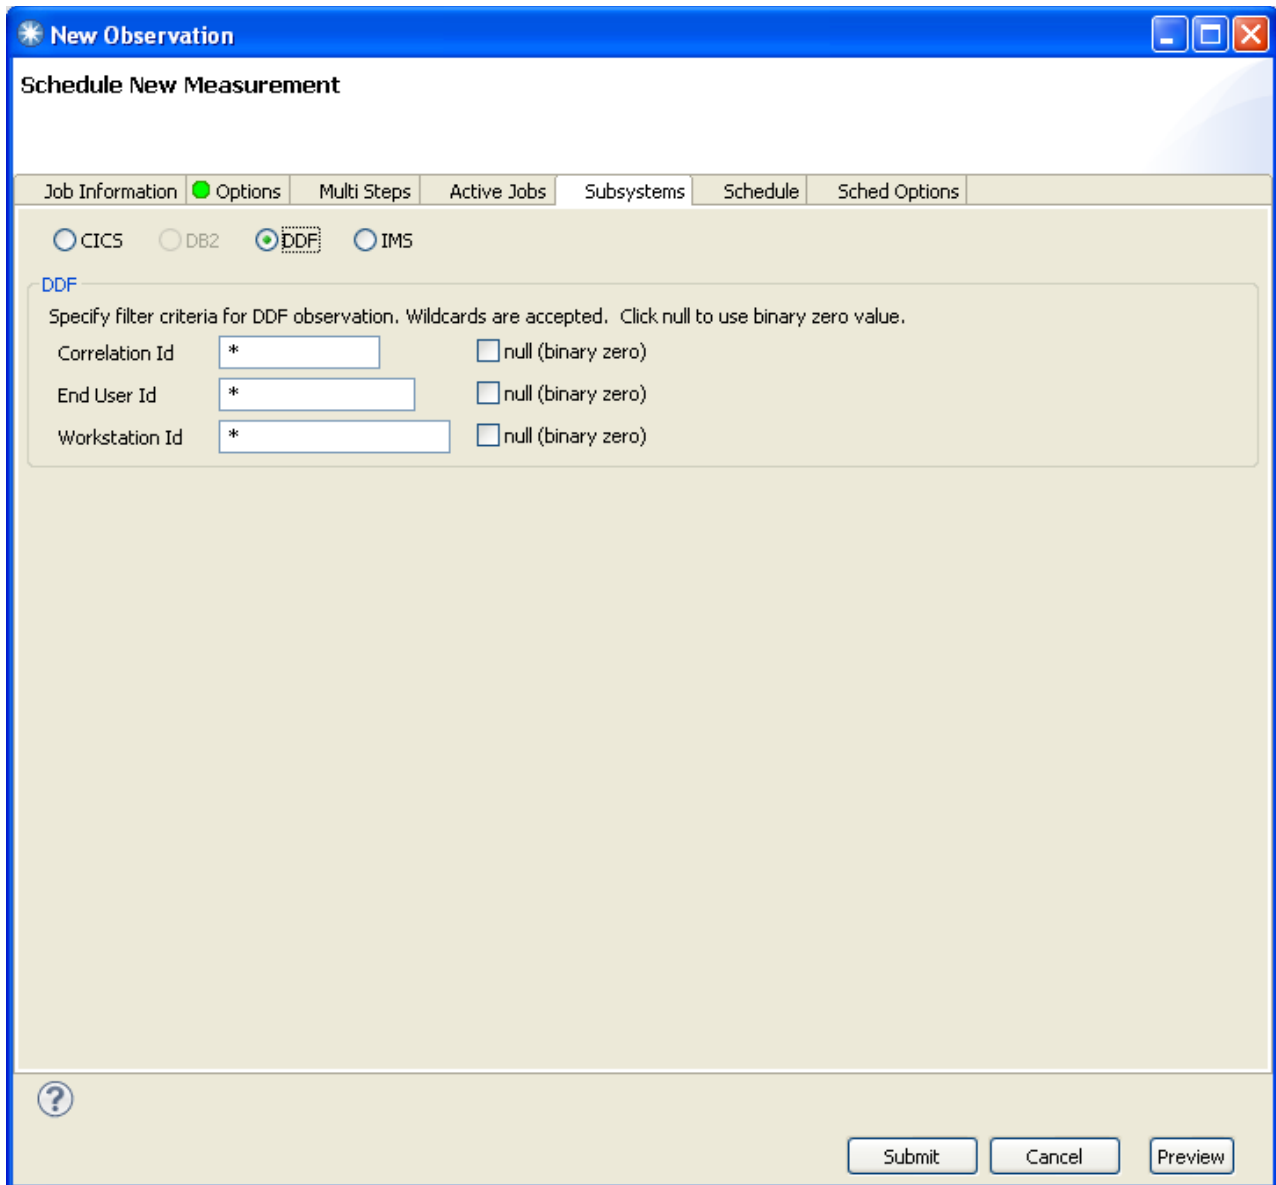


Figure 28. Subsystems tab - DDF option

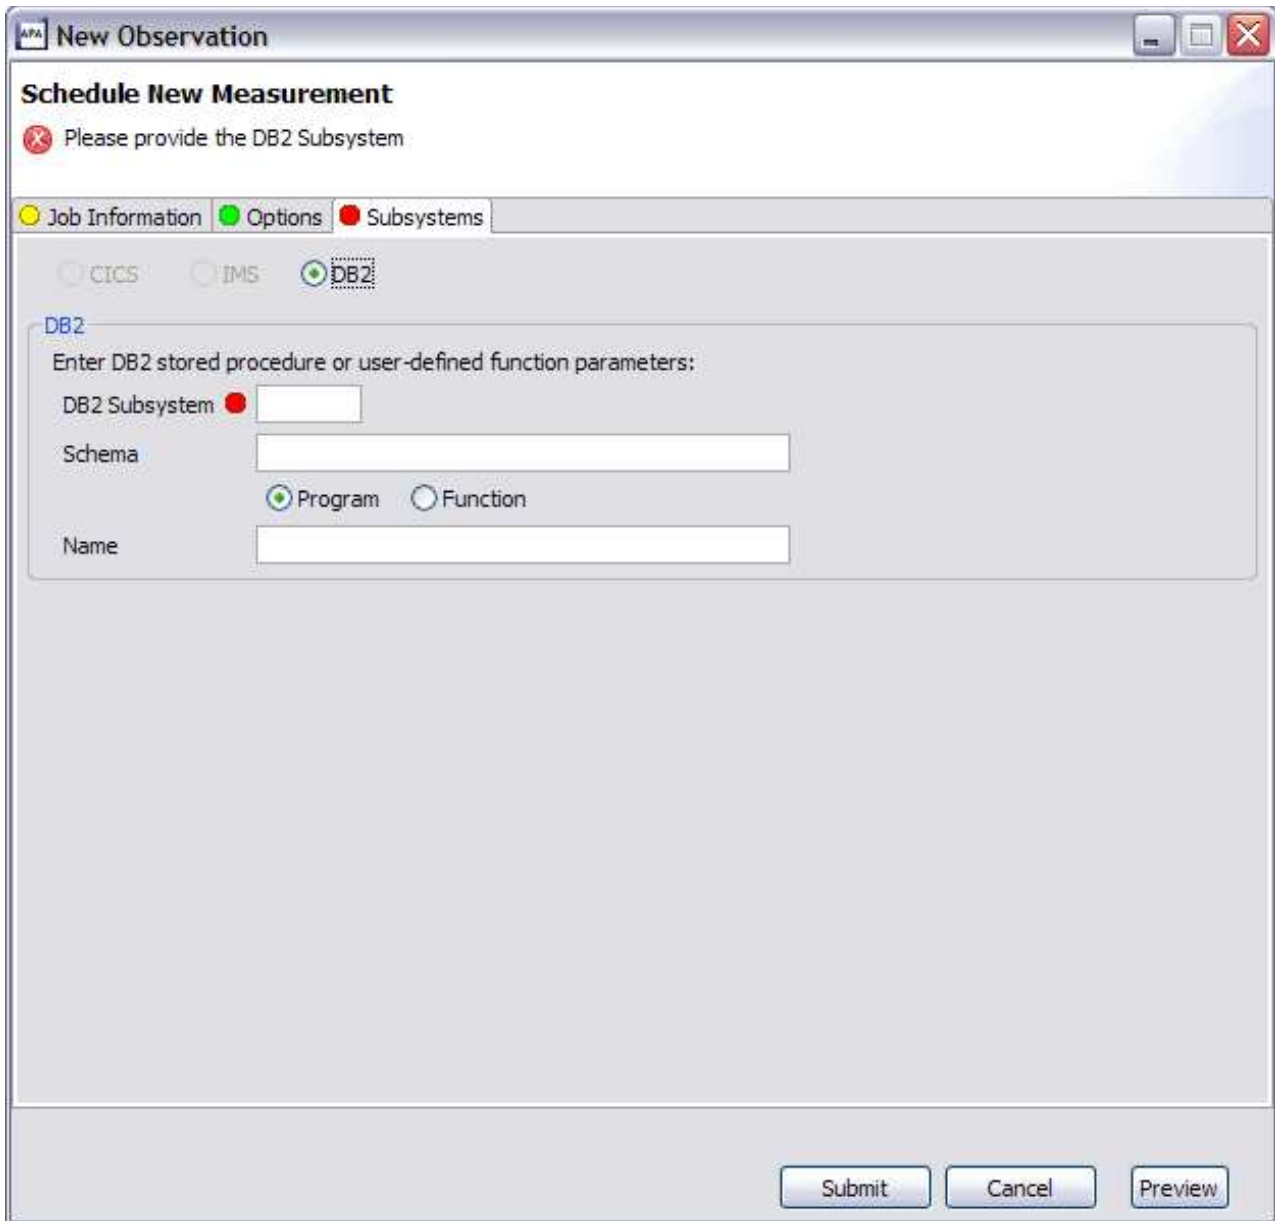


Figure 29. Subsystems tab - DB2 option

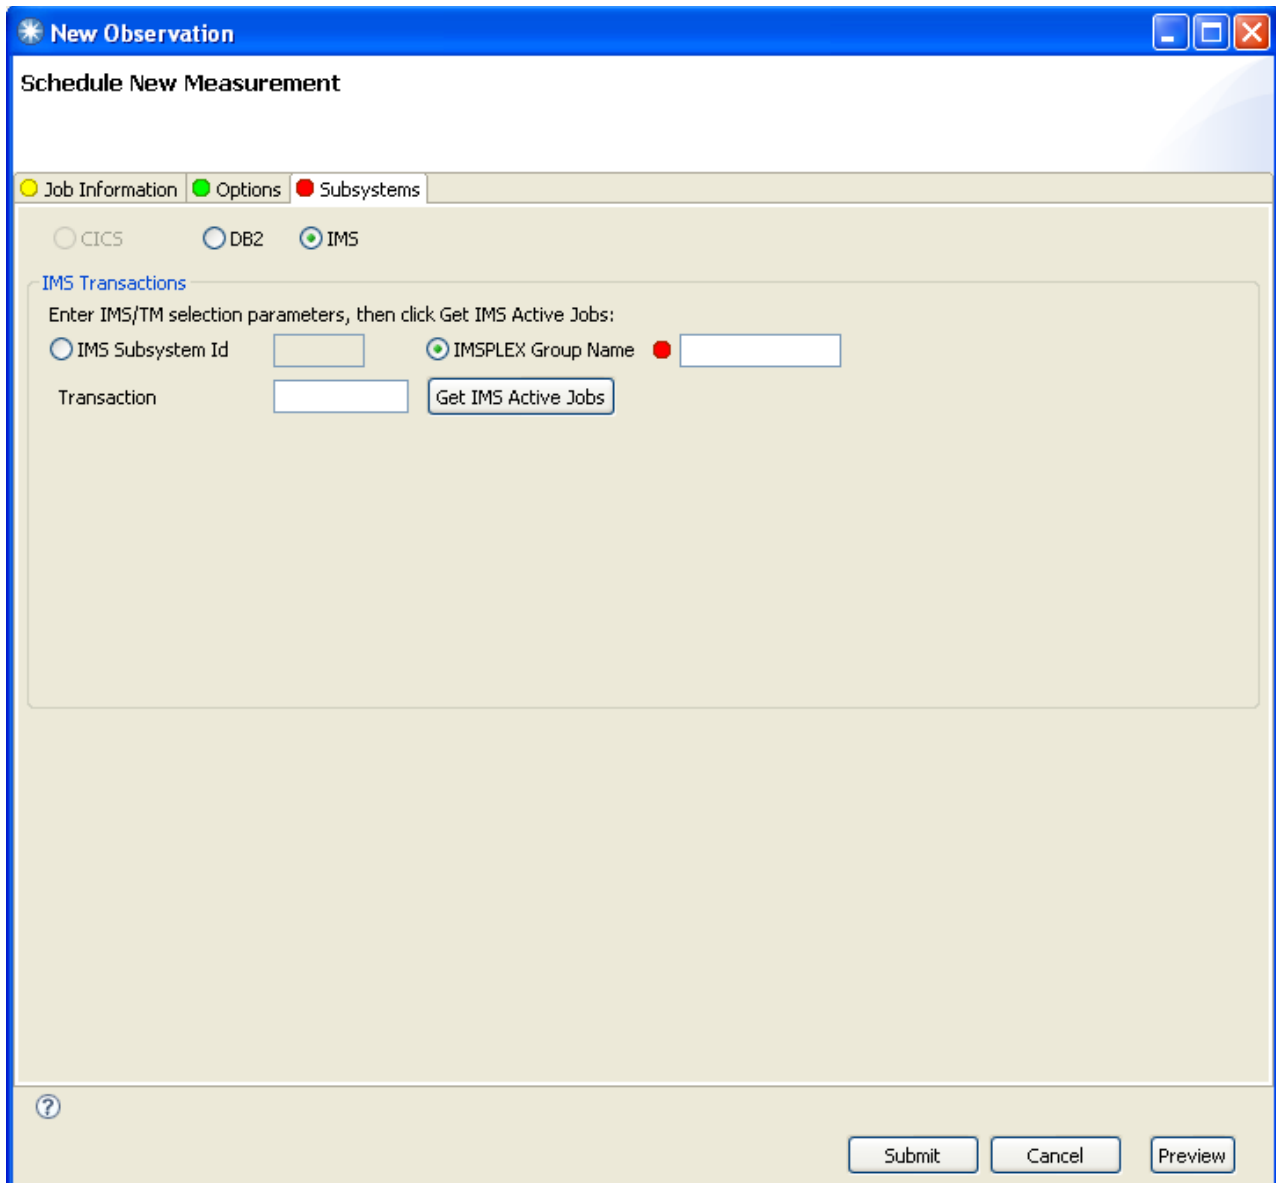


Figure 30. Subsystems tab - IMS Multiple Address Space option

Enter the IMS Subsystem name or IMSPLEX Group Name, and the IMS Transaction that is to be measured, and then press the “Get IMS Active Jobs” button to display the list of IMS MPP regions that are eligible to process the transaction. Select the IMS MPP regions that Application Performance Analyzer is to measure from this list.

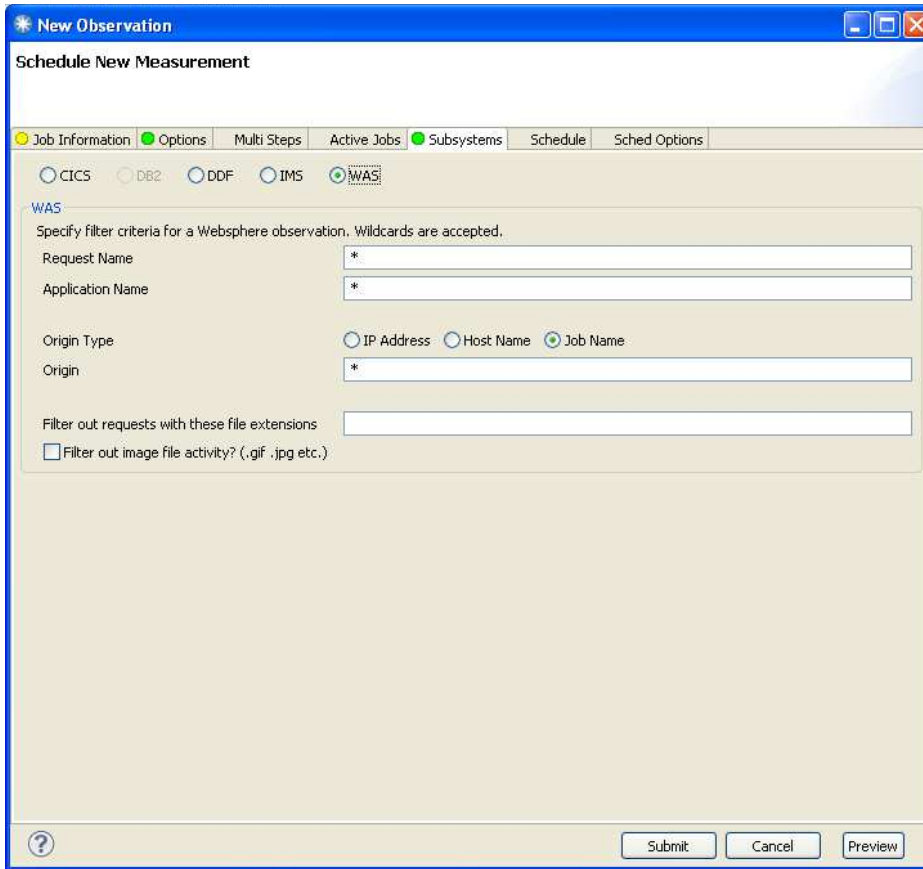


Figure 31. Subsystems tab – WAS option

Refer to “Panel 5 – Subsystems” on page 31 for details of the individual fields and edits.

### Schedule tab

The Schedule tab is used to generate a schedule for repetitions of future measurements. A maximum of 105 future scheduled measurement entries is allowed.

Click the calendar button to select a date/time or enter the value directly. Enter the Repeat and After fields, then click Add to Schedule to add the date(s). The entry(s) are added to the Measurement Schedule. Click the checkbox to select or unselect one or many entries or click Select All to select all or Unselect All to deselect all the entries.

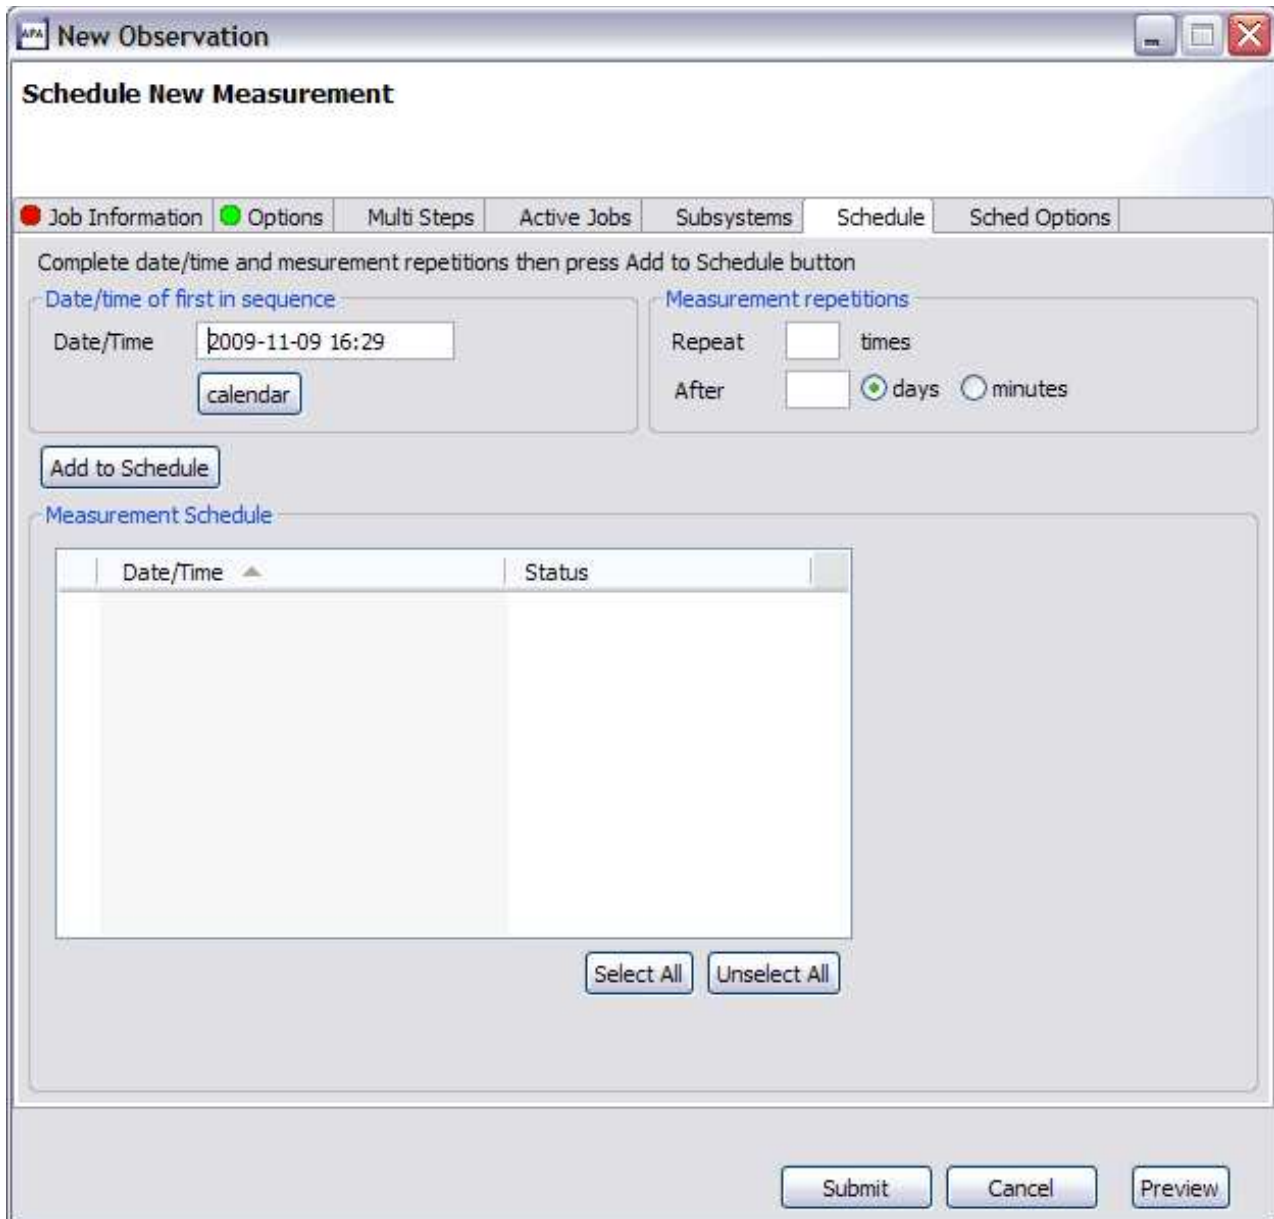


Figure 32. Schedule tab

Refer to “Panel 7 – Schedule” on page 38 for details of the individual fields and edits.

### Sched Options tab

The Sched Options tab includes additional scheduling options in which the available fields depend on if the Measure active job field is checked and whether or not a future schedule has been entered on the Schedule tab.

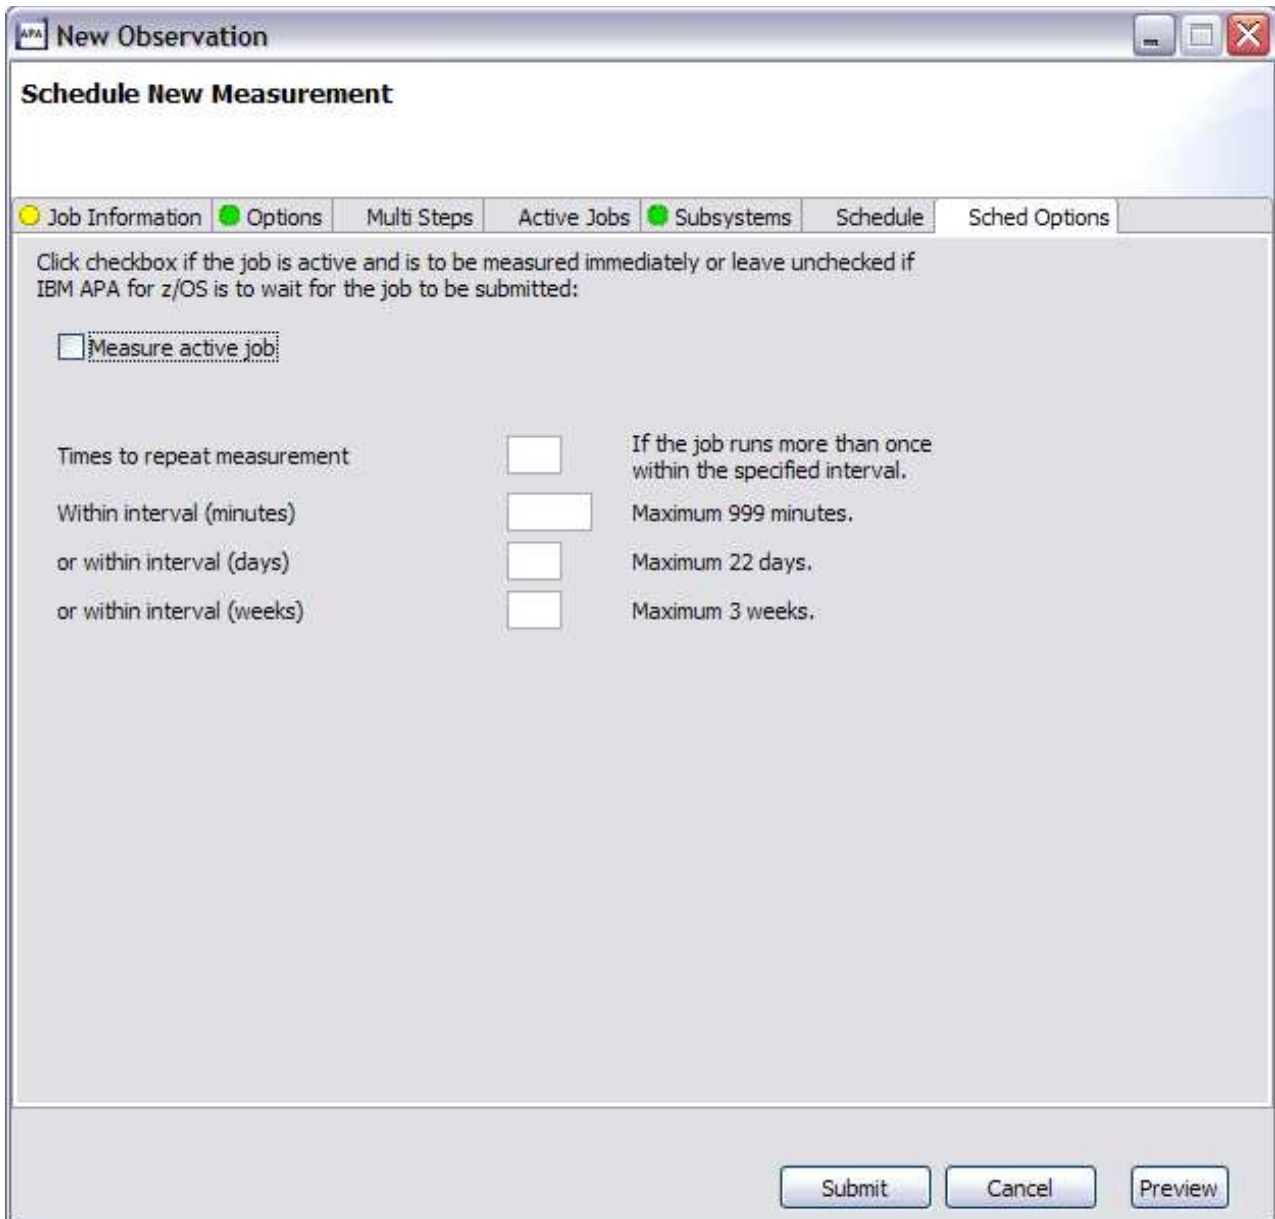


Figure 33. Sched Options tab

Refer to “Panel 8 – Sched Options” on page 41 for details of the individual fields and edits.

## New threshold observation



New Threshold Observation provides the functionality to create and submit a new threshold monitor observation to Application Performance Analyzer. The Threshold Observation request starts only when specified threshold criteria have been satisfied for the target job-step. The criteria are:

- CPU Time
- Elapsed Time
- EXCP Count



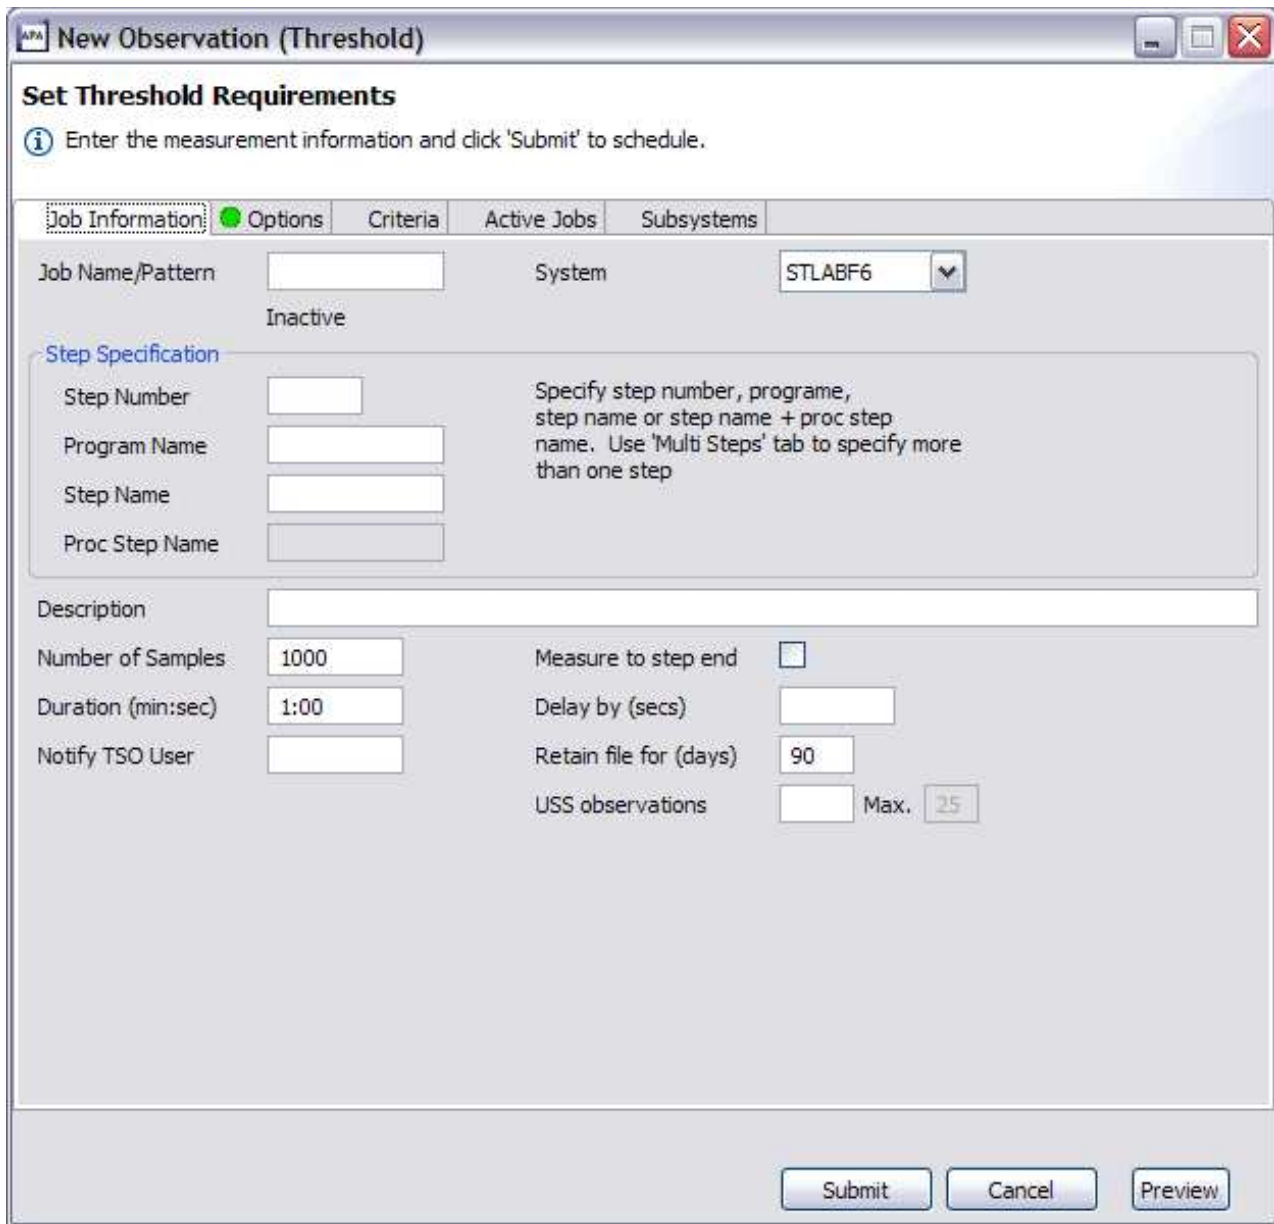


Figure 34. New Threshold Observation dialog

A dialog, incorporating many of the same tabs as for a New Observation, is displayed, where the details for the new threshold observation must be provided. Refer to “New observation” on page 746 for details on the functions of the dialog.


Refer to “Entering a Threshold Monitor request” on page 44 for details of the individual fields and edits for a threshold observation.

Click the Submit button to submit the request. The Observations List automatically refreshes and displays the new observation on the list.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Criteria tab

The Criteria tab is the only tab in the New Threshold Observation dialog that is specific to Threshold requests only. This tab is used to specify the Threshold Criteria that triggers the measurement to run.

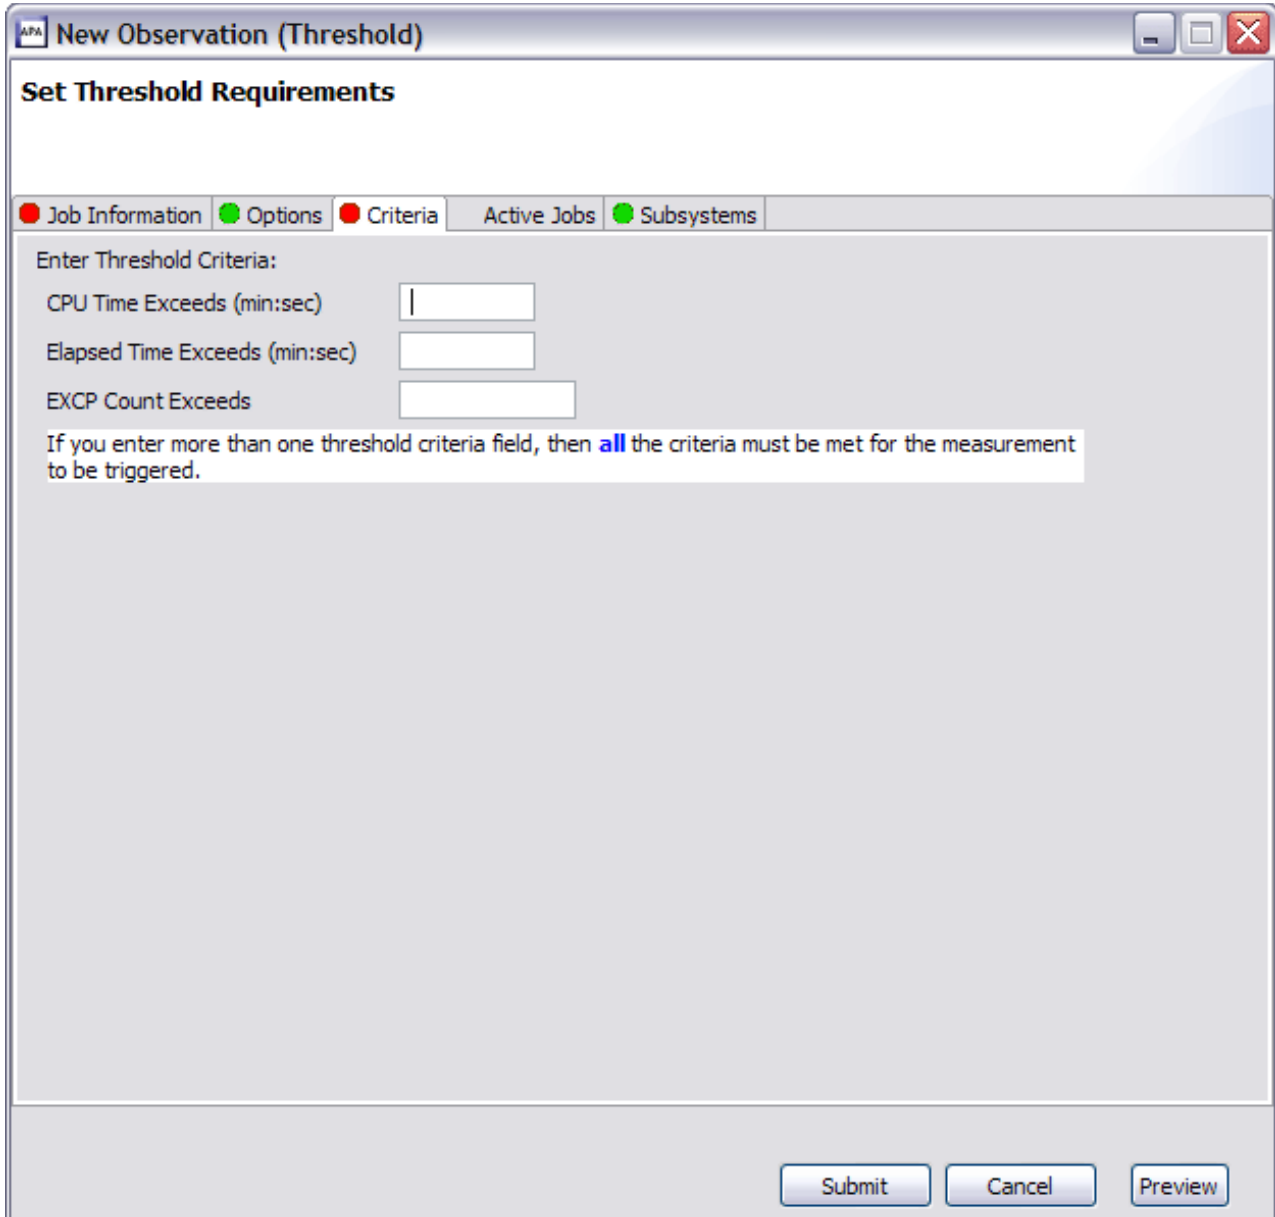

The screenshot shows a window titled "New Observation (Threshold)" with a tabbed interface. The "Criteria" tab is selected, indicated by a red dot. The window title bar includes standard OS controls (minimize, maximize, close). Below the title bar, the text "Set Threshold Requirements" is displayed. The main area contains a tabbed interface with five tabs: "Job Information" (red dot), "Options" (green dot), "Criteria" (red dot), "Active Jobs" (grey dot), and "Subsystems" (green dot). Under the "Criteria" tab, the text "Enter Threshold Criteria:" is followed by three input fields: "CPU Time Exceeds (min:sec)", "Elapsed Time Exceeds (min:sec)", and "EXCP Count Exceeds". A text box below these fields contains the instruction: "If you enter more than one threshold criteria field, then **all** the criteria must be met for the measurement to be triggered." At the bottom right of the dialog, there are three buttons: "Submit", "Cancel", and "Preview".

Figure 35. Criteria tab

Refer to "Panel 3 - Criteria" on page 45 for details of the individual fields and edits.

## Import Observation



Import Observation provides a means to import a previously exported observation to the active started task. The entry fields include the Import dataset name, optional description and option to delete the imported dataset. A **dataset list**

button is also available where a dataset name can be selected from datasets that are listed based on a full or partial dataset name. When the **OK** button is clicked, the observation is imported and the Observations List refreshed with the new observation.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

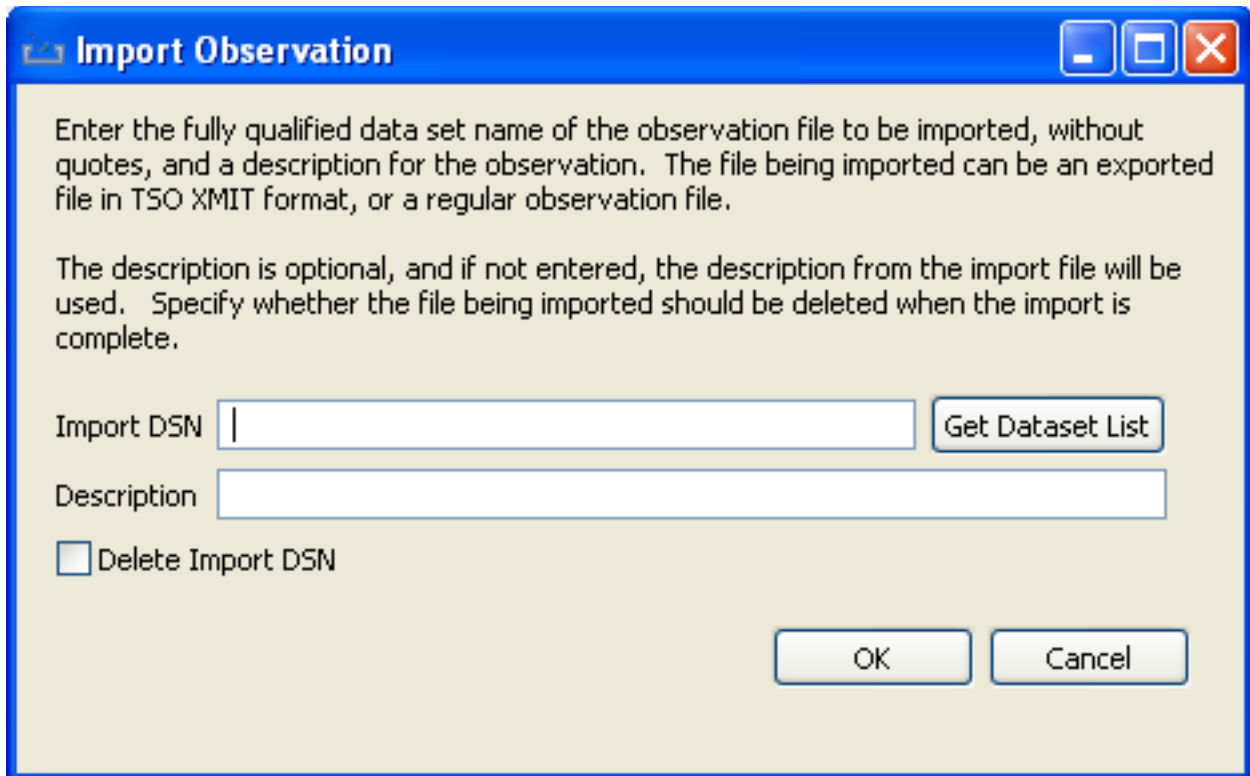


Figure 36. Import Observation dialog

### Dataset List

The Dataset List dialog provides a means to retrieve a list of datasets based on a dataset name pattern, where the results are displayed and a single dataset may be selected. The dataset name may include filter keys which are interpreted as follows:

- \* A single asterisk by itself indicates that either is a qualifier or one or more characters within a qualifier can occupy that position. An asterisk can precede or follow a set of characters.
- \*\* A double asterisk indicates that zero or more qualifiers can occupy that position. A double asterisk cannot precede or follow any characters; it must be preceded or followed by either a period or a blank.
- % A single percent sign by itself indicates that exactly one alphanumeric or national character can occupy that position.
- %% One to eight percent signs can be specified in each qualifier.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

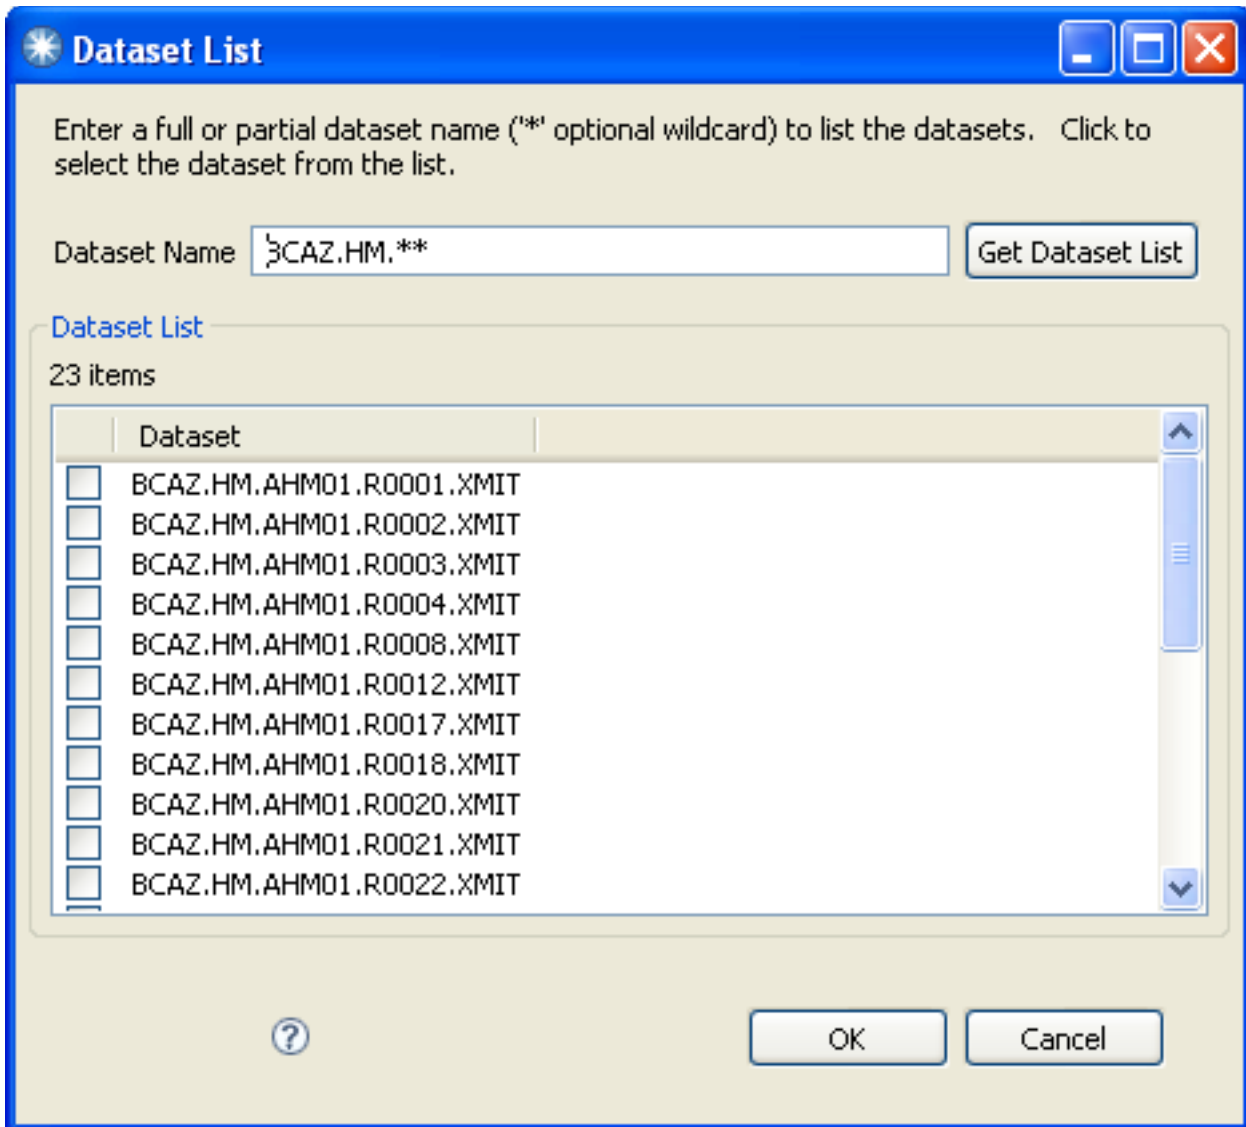


Figure 37. Dataset List dialog

## Context menu

The Observations List context menu is accessed by a right-mouse button click on an observation request. The Observations List context menu provides Observation (row) level actions that include:


- Download Reports
- Sticky Notes
- Sub
- New
- Trigger
- Modify
- Export
- Keep
- Cancel Run Again

- Delete
- Cancel
- Mapping Repository
- Download XML
- Download PDF
- Delete Reports
- Tag
- Clear All Tags
- Generate Variance Reports
- Generate CICS MASS Reports

The Download Reports menu item is disabled if an Observation sample file does not exist, for example, the Observation is not in a completed status. The Delete Reports menu item is only enabled if reports have been downloaded for the selected Observation.

## Download reports



Download Reports provides functionality to retrieve the Application Performance Analyzer reports for an Observation. Download Reports triggers formatting of the observation reports on z/OS then download the reports to the local repository. The reports are then available for viewing in the Observation Reports List View. A reports icon  is displayed on the observation request row where the reports download was issued.

Once the reports have been downloaded, they are available until deleted via the Delete Reports action.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Sticky notes



Sticky Notes provides a tool to write, save, print, and delete notes for a specific Observation Request. A sticky note icon is displayed on the observation request row where the note was saved. The sticky note can also be launched by double-clicking the observation row. This is a GUI only feature, and not available in the Application Performance Analyzer ISPF interface.

## Sub



Sub issues an immediate submission of an Observation request. A new Observation request is automatically submitted to Application Performance Analyzer on z/OS, using the same parameters as the original request. No data entry dialog is presented for this action.

Use Sub instead of New when none of the original request parameters need to be changed.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## **New**



New Observation provides the functionality to create and submit a new observation to Application Performance Analyzer. Because the New Observation request is issued from the context menu instead of the toolbar, the New Observation dialog is pre-populated with values from the selected observation request. All other functionality remains the same.

Refer to “New observation” on page 746 and “New threshold observation” on page 762 in “Toolbar” on page 744 for details.

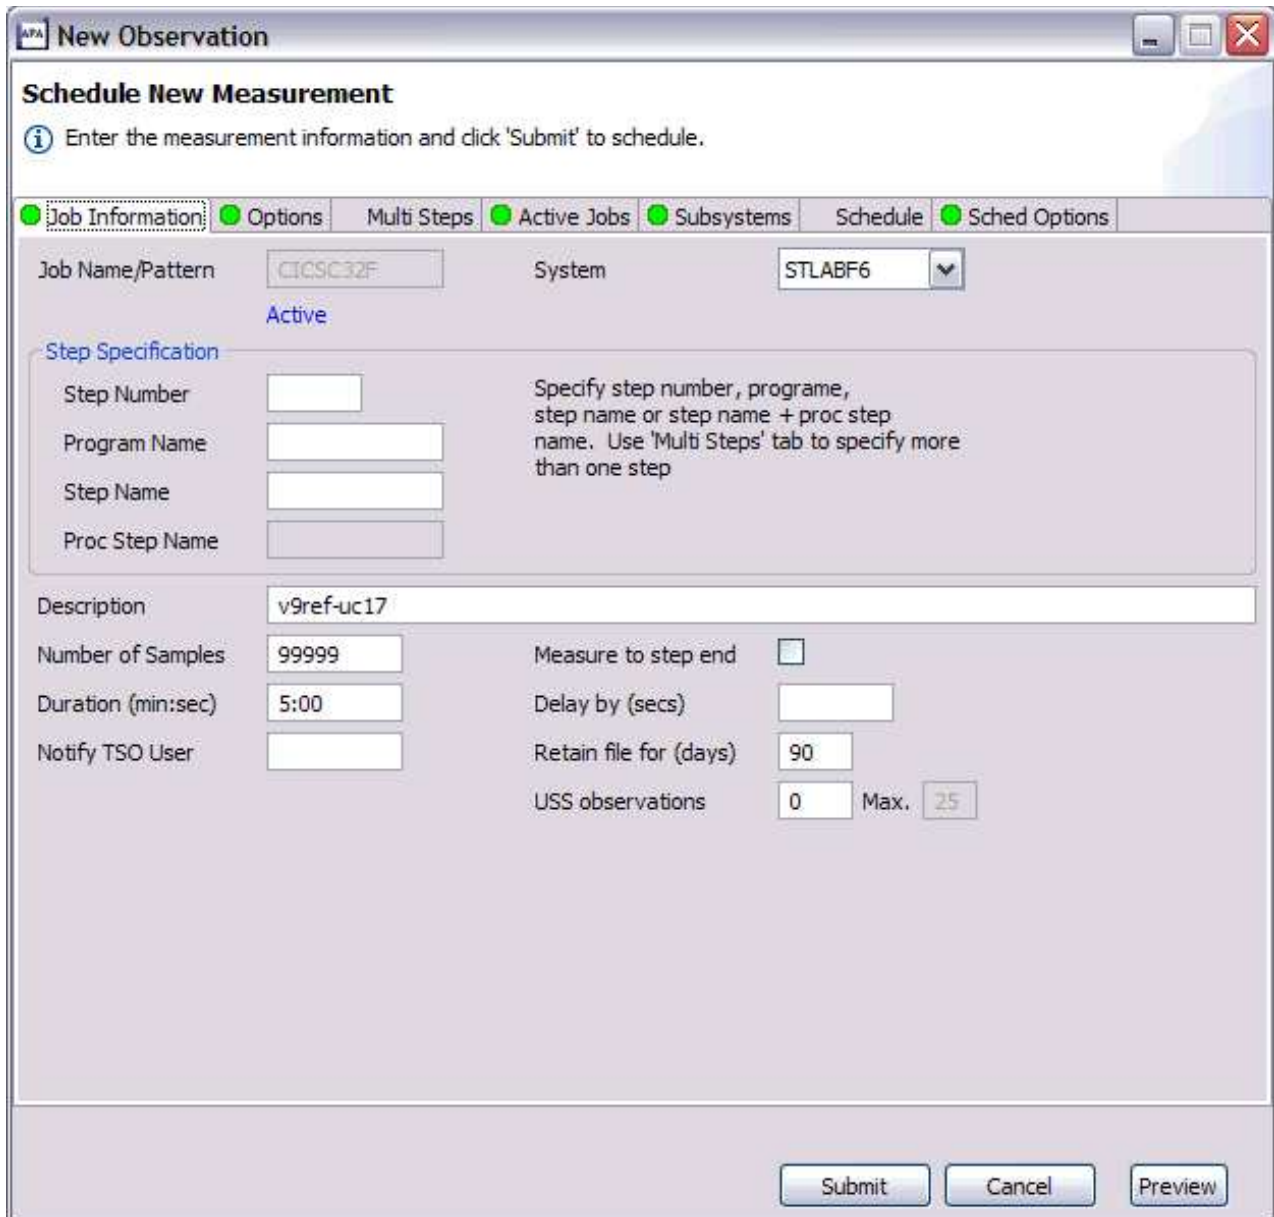


Figure 38. New Observation (context menu) dialog

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### Trigger

Trigger creates a new request to be triggered when this request starts. This can only be used on a request that is in SCHED status.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### Modify

Modify provides the functionality to edit the parameters of an observation request that has not yet started. A Modify Observation dialog is displayed, pre-populated with values from the selected observation. All other functionality (edits, fields, etc) remains the same as for a New Observation.

Refer to “New observation” on page 746 and “New threshold observation” on page 762 in “Toolbar” on page 744 for details.

Modify Observation 1177

### Modify Measurement

Enter the measurement information and click 'Submit' to schedule.

Job Information Options Multi Steps Active Jobs Subsystems Schedule Sched Options

Job Name/Pattern: PLI System: STLABF6

Inactive

**Step Specification**

Specify step number, program, step name or step name + proc step name. Use 'Multi Steps' tab to specify more than one step

Step Number: [ ] Program Name: [ ] Step Name: [ ] Proc Step Name: [ ]

Description: 10

Number of Samples: 30000 Measure to step end:

Duration (min:sec): 1:30 Delay by (secs): [ ]

Notify TSO User: [ ] Retain file for (days): 90

USS observations: 0 Max. 25

Submit Cancel Preview

Figure 39. Modify Observation dialog

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Export



Export will save the observation request and optionally the children (dependent) requests to a TSO dataset in XMIT format where it can be imported to other started tasks using the Import Observation action. An information dialog is displayed showing the exported dataset name once completed.



**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### **Keep**

Keep updates the observation request so that the request is kept until it is manually deleted. This overrides the auto delete feature.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### **Cancel Run Again**

Cancel Run Again will result in the cancellation of Run Again Observations that are not active or in write status.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### **Delete**



Delete removes the observation request. The Observations List automatically refreshes with the deleted observation removed from the list. Additionally any open reports for this request are also removed.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### **Cancel**

Cancel cancels an active observation request.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### **Mapping Repository**



The Mapping Repository launches the Source Program Mapping Repository editor dialog. The editor provides an interface to manage files/directories of source program listings used for the source program mapping display feature of individual reports.

For further details, please refer to the Mapping Repository description in “Context menu” on page 737 for details.

### **Download XML**



Download XML downloads reports for the observation request in XML format. The User is prompted for the location to save the XML file. Report categories, reports and report options are based on the “Report download options preferences” on page 732 settings.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Download PDF



Download PDF downloads reports for the observation request in PDF format. The User is prompted for the location to save the PDF file. Report categories, reports and report options are based on the “Report download options preferences” on page 732 settings.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Delete reports



Delete Reports deletes the observation request reports from the local repository. The reports icon displayed on the Observations List row is removed and any open reports for this request are also removed from the display. Reports can be re-downloaded by selecting Download Reports from the context menu.

## Tag



The Tag action is used to flag an Observation(s) used for the Generate Variance Reports and Generate CICS MASS Reports features. The Tag icon is displayed on the Observations List row that was tagged and is removed if the Tag action is selected for an Observation that was already tagged or if the Clear All Tags action is selected, where all tags will be cleared. Up to 20 Observations that include a Sample DSN file can be tagged.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Clear all tags



The Clear All Tags action removes the tag setting for all Observation(s) that are tagged. The Tag icon is removed for each tagged row.


**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Generate variance reports



Generate Variance Reports provides functionality to compare up to 20 observations, creating a V – Variance Reports series report. One or more observations must already be tagged and the Observation where the Generate Variance Reports is selected serves as the base.

When selected, this action triggers formatting of the V01 – Measurement Variance Summary report on z/OS and then downloads the report to the local repository. The report is then available for viewing in the Observation Reports List View. A

reports icon  is displayed on the observation where this action was selected. Once the report is downloaded, it is available until deleted via the Delete Reports action.


If, in addition to the Variance Report, all the reports for the observation are to be viewed, the Download Reports action must be selected after the Generate Variance Report has completed.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

## Generate CICS MASS reports



Generate CICS MASS Reports provides functionality to report on the activity in up to 21 CICS regions (up to 20 tagged and one base), and creates an X – Multi Address Space series of reports. One or more observations that include a CICS Extractor must already be tagged and the Observation in which the Generate CICS MASS Reports is selected serves as the base.

When selected, this action triggers formatting of the Multi Address Space reports on z/OS and then downloads the reports to the local repository. The reports are then available for viewing in the Observation Reports List View. A reports icon  is displayed on the observation where this action was selected. Once the report is downloaded, it is available until deleted via the Delete Reports action.

If, in addition to the CICS MASS Reports, all the reports for the observation are to be viewed, the Download Reports action must be selected after the Generate CICS MASS Reports has completed.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

---

## Observation Detail view

The Observation Detail view, the first tab located at the bottom center of the Application Performance Analyzer GUI, displays detailed information of the selected request from the Observations List. The tab title for this view displays the request number of the selected request.

The data in the view is organized into several groups:

- General Information (general purpose information about the observation request)
- Measurement Criteria (measurement criteria of the request)
- Measurement Information (results of the measurement request)
- Data Extractors (types of data extractors that were included)
- Steps Information (multi-step job information)
- Scheduling Information (future scheduled job information)

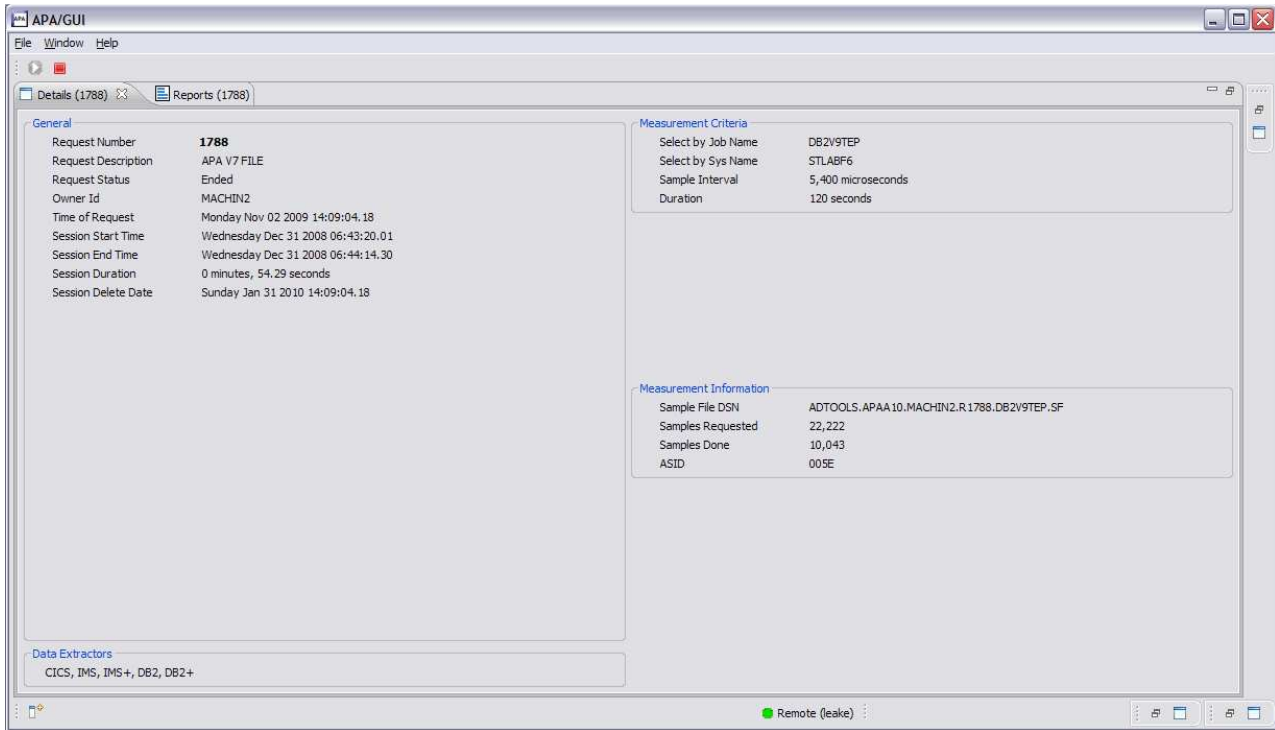


Figure 40. Observation Detail view

## Observation Reports List view

The Observation Reports List view, the second tab located at the bottom center of the Application Performance Analyzer GUI, displays a list of reports for the selected request from the Observations List. This view includes a toolbar and a row-specific context menu. The tab title for this view displays the request number of the selected request. An empty page is displayed if the reports have not yet been downloaded for the selected request.

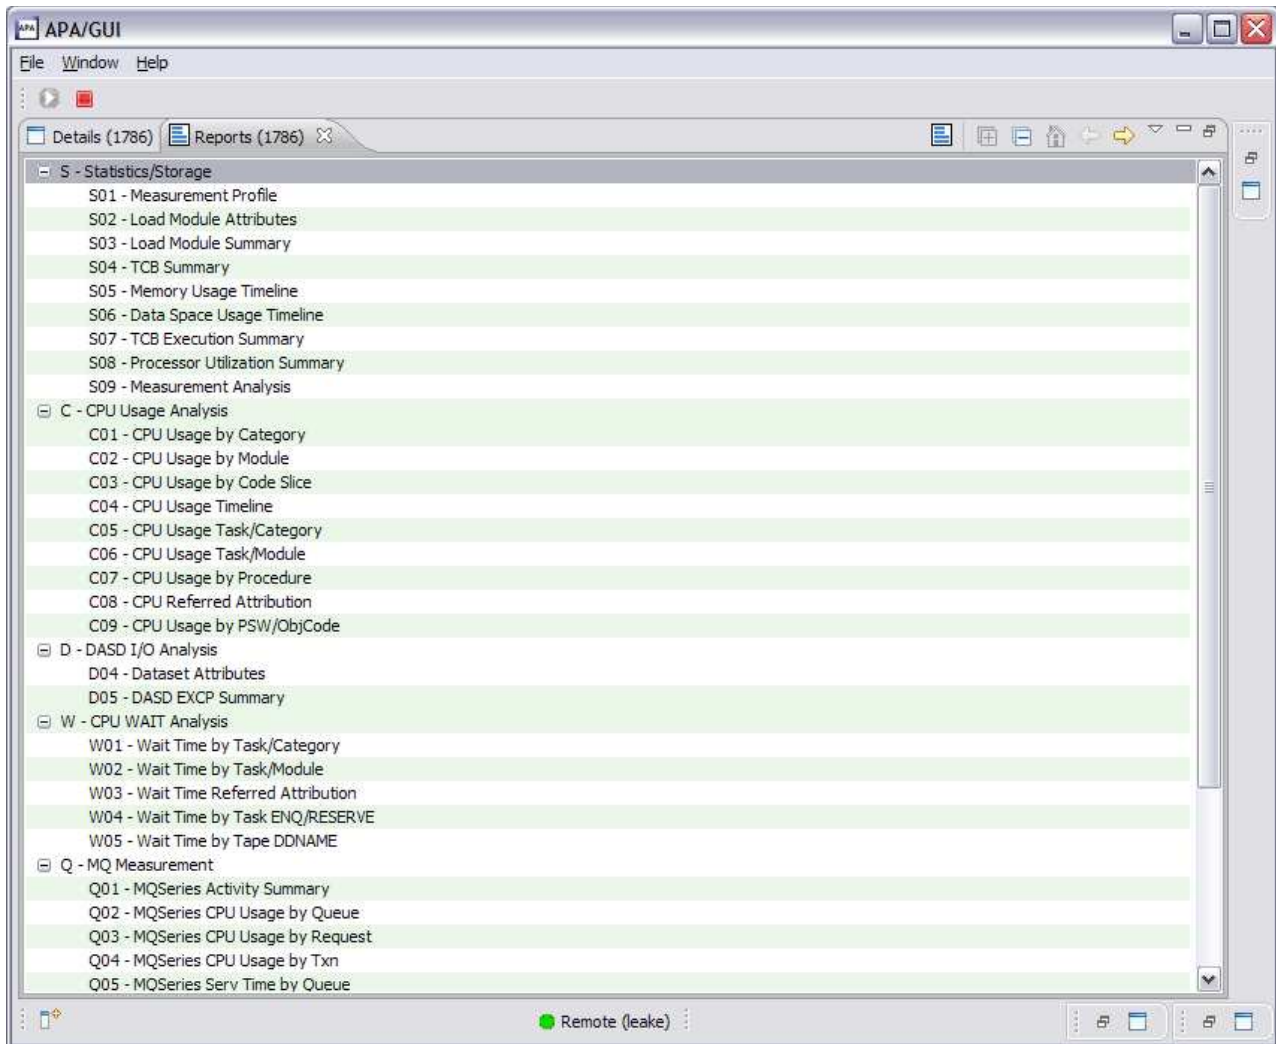


Figure 41. Observation Reports List view

The reports list is a 2-level tree-view. The first level (parent) rows represent the report category while the second-level (child) rows are for the individual reports. Not all categories and reports are listed in the Reports List view, only those that exist for the selected observation. The list is opened to the category set for the Expand Default user preference.

The category rows are for informational/organizational purposes only and result in no action if clicked (other than if the category is expanded). For each report row that is selected, a new Report View is opened and the Report Options view is updated to the active (selected) report. Refer to “Report views” on page 780 for details.

A context menu is available for each row on the report list. Right-click the row of the desired report or category and the list of available menu actions is displayed. Refer to “Context menu” on page 776 for details.

Refer to Chapter 3, “Performance analysis reports,” on page 47 through “WebSphere performance analysis reports” on page 928 for details of the individual reports.

## Toolbar

The Reports List toolbar provides buttons for view-level actions that include Download Reports. Additionally, common navigation actions are available, including Expand All (expand all report categories) and Collapse All (collapse all report categories).

The toolbar includes a Local Pull Down button, represented by a down arrow icon located at the far right-side of the toolbar. The pull down provides an alternative path to many of the toolbar actions.

### Download reports



The Download Reports button downloads reports for the active (selected) observation request of the Observations List view. If the reports are already downloaded, they are re-downloaded. Refer to “Download reports” on page 767 for details.

Once the reports are downloaded, the Reports List view is updated with the list of reports that are available for the selected observation request.

## Context menu

The Reports List context menu is accessed by a right-mouse button click in the view. It provides actions that include Download Report, Download XML and Download PDF. Once the reports are downloaded, the Reports List view is updated with the list of reports that are available for the selected observation request.

### Download report



The Download Report action downloads a single report from z/OS. Any report can be downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports. This feature is convenient when the Report Options have been modified and only the single report needs to be downloaded.

Once the report has been downloaded, it will be refreshed in the Report View once the download is complete.

### Download XML



Download XML downloads a single report for the observation request in XML format. Any report can be downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports. The User is prompted for the location to save the XML file. Report categories, reports and report options are based on the “Report download options preferences” on page 732 settings.

### Download PDF



Download PDF will download a single report for the observation request in PDF format. Any report can be downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports. The User is prompted for the location to save the

PDF file. Report categories, reports and report options are based on the “Report download options preferences” on page 732 settings.

## Edit report options



The Edit Report Options context menu launches a dialog that lists all report options for the selected (active) report from the Reports List. The window title displays the id of the selected report.



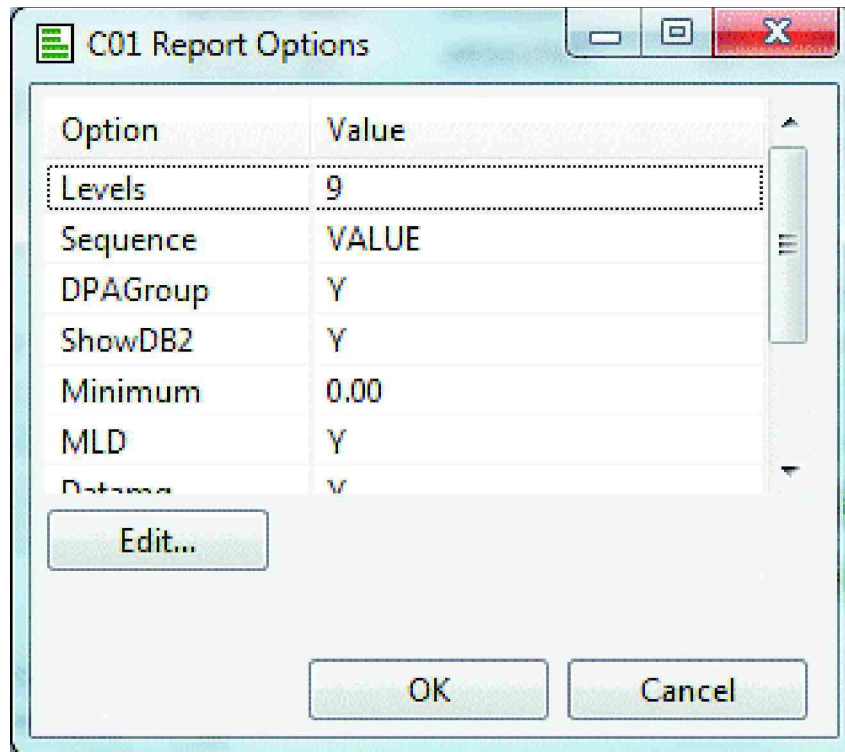



Figure 42. Report options dialog

Each report option can be edited and changed by selecting the option and pressing the Edit button or by double-clicking on the desired row. An edit dialog window will be displayed where the value can be modified.



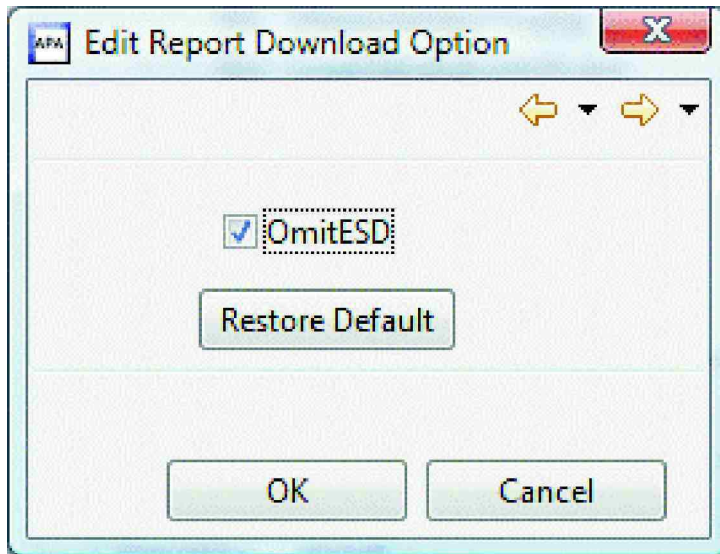

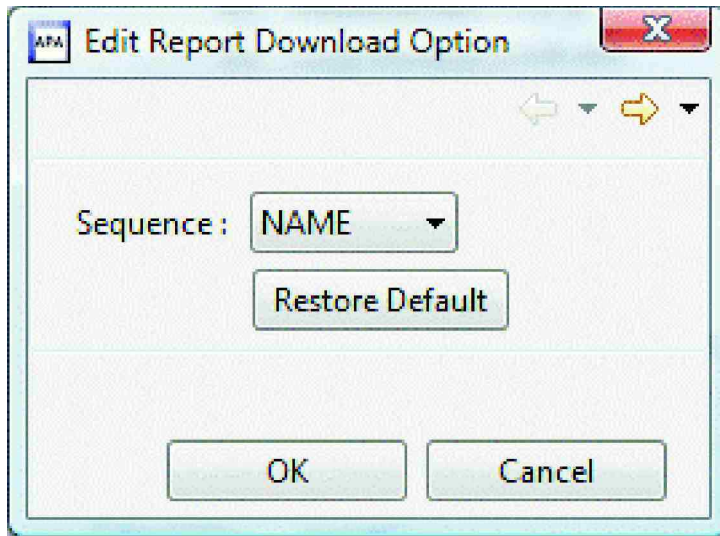

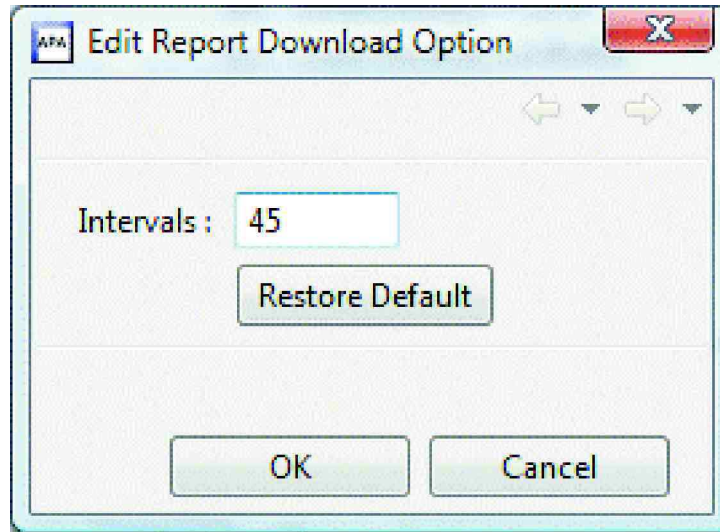


The individual report can then be downloaded with the new report options applied and the Report View refreshed with the updated report.

Any report can be edited and downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports.

The modified report options are only applied for the selected observation request report. Alternatively, if the report option value should be a permanent change that would be applied to all observation requests, the report option preference located in the Preferences dialog should be modified instead.

### Sticky notes



Sticky Notes provides a tool to write, save, print and delete notes for a specific observation request report. A sticky note  icon is displayed in the reports list view for each report row where a sticky note was saved. The sticky note can also be launched by double-clicking the report row in the reports list view.

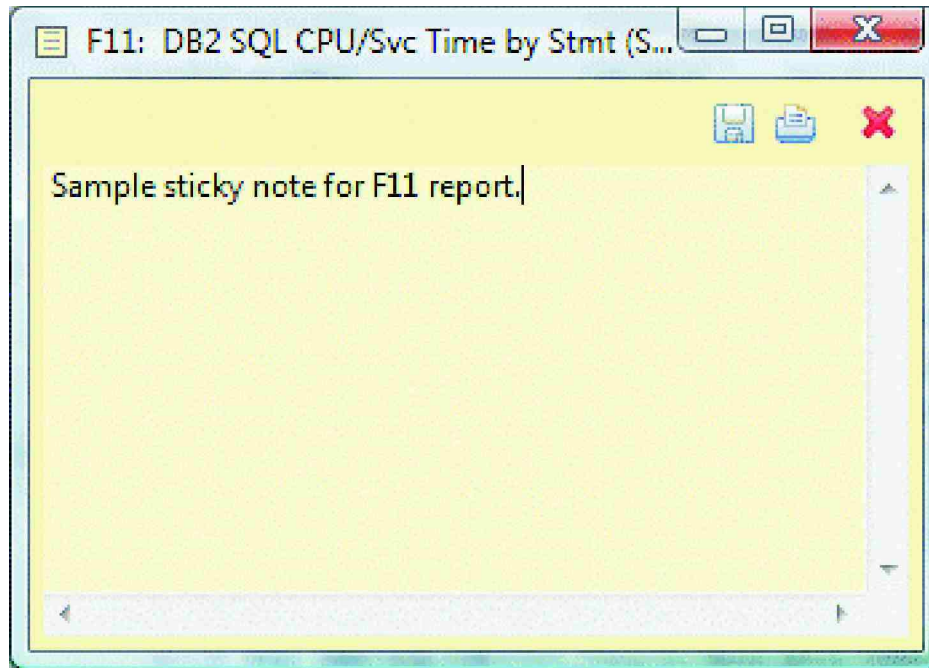


Figure 43. Sticky Notes dialog

---

## Report views

The Report view, located next to the Reports List view, displays an individual report selected from the Reports List. This is a multiple-instance view, where multiple reports can be opened at once – one view per report, including reports from observation requests other than the active observation. This allows for comparison capabilities of the same report, but from different observations or viewing multiple reports at once.

Each report has a separate view that includes a toolbar and context menu for each instance. A set of accelerator keys is also available, which provides quick keyed access to some of the actions.

The tab title for this view identifies the report ID, name, observation request it is for and job name of the observation.

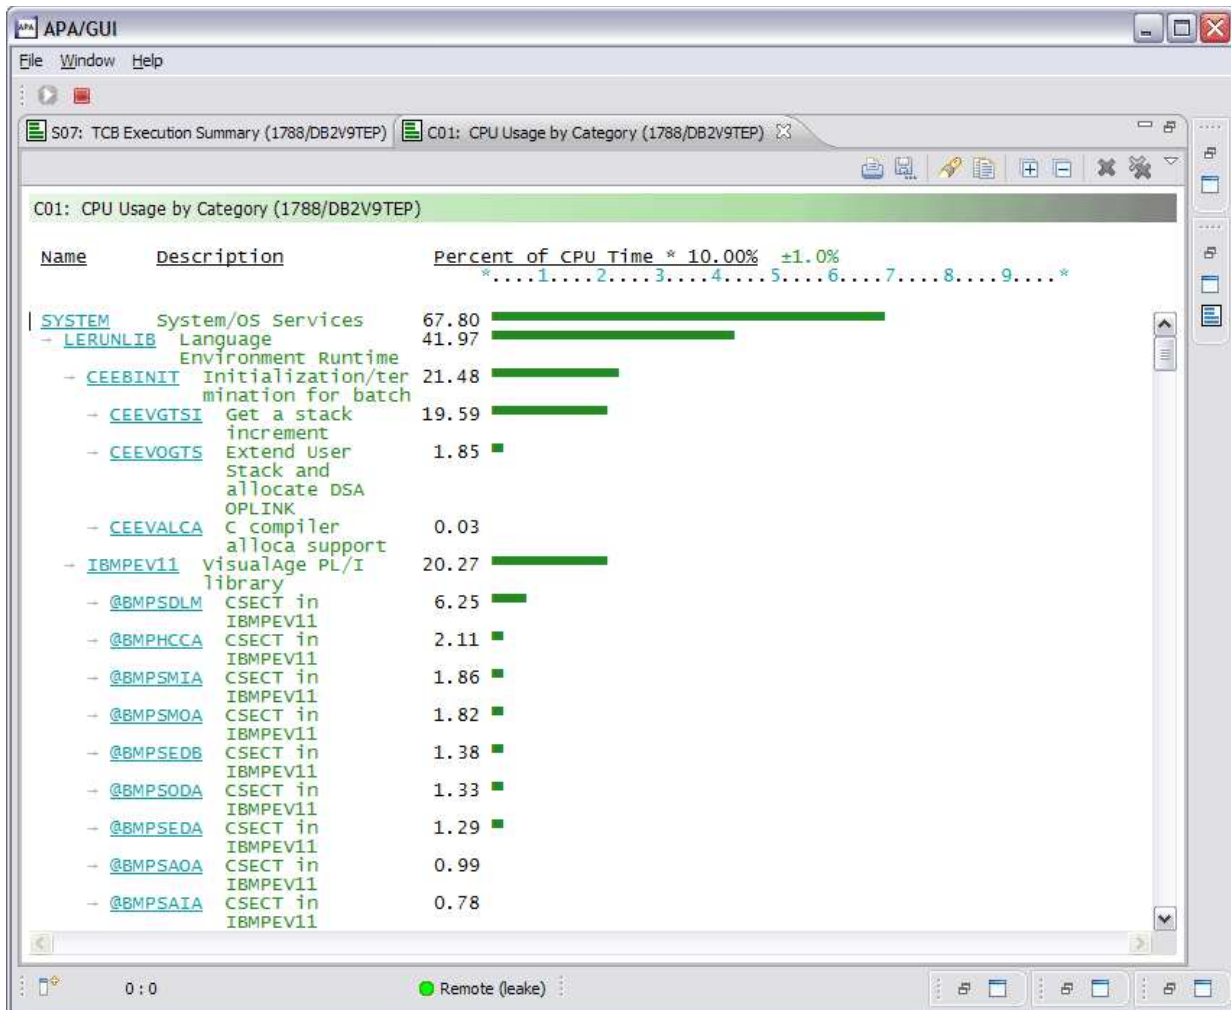


Figure 44. Report view

The report is organized by two sections: the header and report body. The header section includes a line for the report ID/name and can include non-scrollable report column headings.

The report body is scrollable and includes tree expand/collapse capability. Hyperlinked text is identified when the cursor is changed from a pointer to a hand and can include both expand/collapse functionality (an internal link - within the document) or a link to a separate report. If the link to a separate report is clicked, a new Report view is opened to display the selected report. If an internal link is clicked, the next level of report is expanded. If the link is clicked again, the next level is collapsed.

Some reports include sort functionality, accessible via the context menu of hyperlinked text. The list of sort options is unique for each report. Refer to "Context menu" on page 790 for details of the report sort options.

Refer to Chapter 3, "Performance analysis reports," on page 47 through Chapter 8, "Java/USS/HFS performance analysis reports," on page 459 for details of the individual reports.

## Accelerator keys

Each report view includes a set of accelerator keys – a keyboard combination that provides a quick method to run a report view action. The accelerator keys include actions to Print, Find, Select All, Copy, Close Report and Close All Reports. The key sequences are:

*Table 19. Accelerator key combinations*

Action	Accelerator keys
Print	Ctrl + 'P' Prints the report.
Find	Ctrl + 'F' Finds search string in the report.
Select All	Ctrl + 'A' Selects all rows in the report.
Copy	Ctrl + 'C' Copies selected text to the Windows clipboard.
Close Report	Ctrl + 'W' Closes a report.
Close All Reports	Ctrl + Shift + 'W' Closes all reports.

**Note:** The 'Paste' (Ctrl + 'V') Windows accelerator keys are also available to copy/paste the report contents to another Windows-based application.

## Toolbar

The Report view toolbar provides buttons for report-level actions that include:

- Download Report
- Edit Report Options
- Email Report
- Sticky Notes
- Launch Html
- Print
- Save As
- Find
- Copy
- Close Report
- Close All Reports

Additionally, common navigation actions are available including Expand All (expand the complete report) and Collapse All (collapse the report to the parent-level). The toolbar includes a Local Pull Down button, represented by a down arrow icon located at the far right-side of the toolbar. The pull down provides an alternative path to many of the toolbar actions.

## Download report



The Download Report button will download a single report from z/OS. Any report can be downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports. This feature is convenient when the report options have been modified and only the single report needs to be downloaded.

Once the report has been downloaded it will be refreshed in the Report View once the download is complete.

## Edit report options



The Edit Report Options context menu launches a dialog that lists all report options for the selected (active) report from the Reports List. The window title displays the id of the selected report.

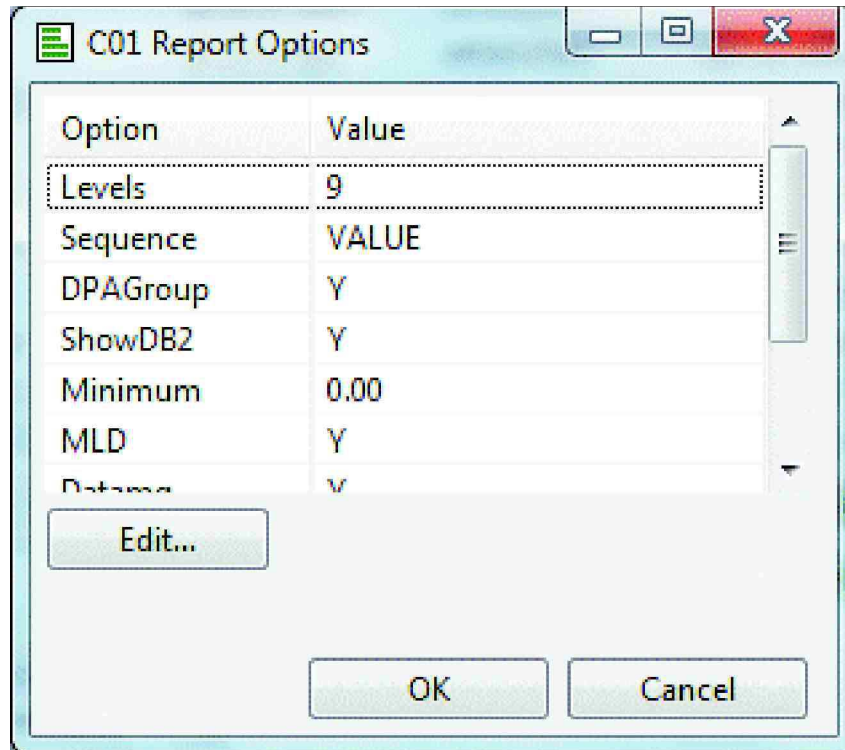


Figure 45. Report options dialog

Each report option can be edited and changed by selecting the option and pressing the Edit button or by double-clicking on the desired row. An edit dialog window will be displayed where the value can be modified.

The individual report can then be downloaded with the new report options applied and the Report View refreshed with the updated report.

Any report can be edited and downloaded with the exception of the Variance (“V”) and CICS MASS (“X”) reports.


The modified report options are only applied for the selected observation request report. Alternatively, if the report option value should be a permanent change that would be applied to all observation requests, the report option preference located in the Preferences dialog should be modified instead.

## Email report




The report e-mail function provides a tool to send a report view, including any associated sticky notes, to one or more e-mail addresses. The From e-mail and SMTP information are sourced from the Email preferences, which must be setup prior to sending an e-mail.

**Note:** This is a GUI-only feature that is available only when a z/OS connection has been established and the e-mail option has been enabled during the customization of Application Performance Analyzer for z/OS PDTCC extension.

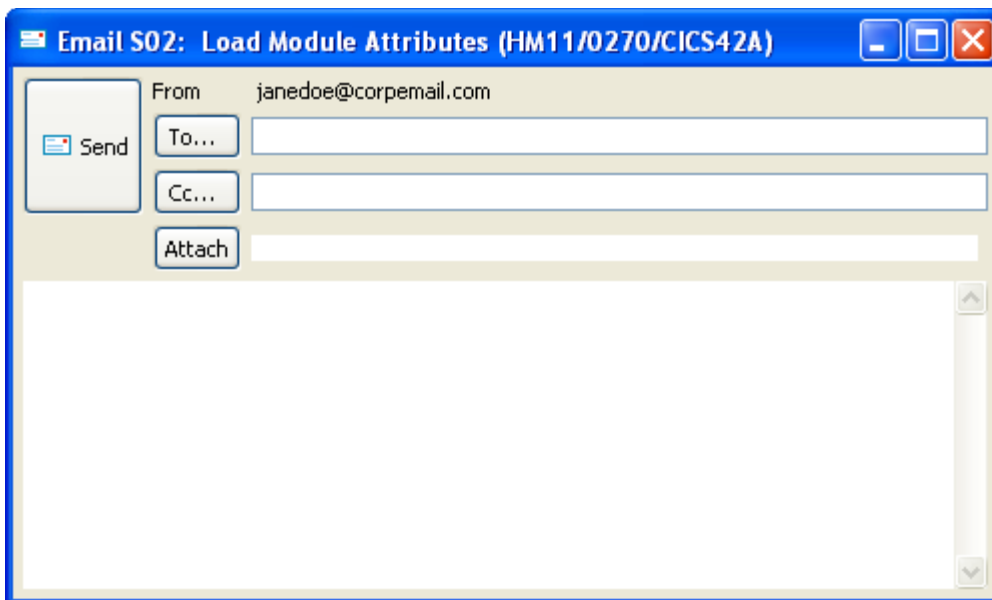

An e-mail addresses dialog is launched if the "To..." or "Cc..." buttons are clicked and provides a tool to select addresses from the e-mail address book list. Reference


the Address Book preference for more details.

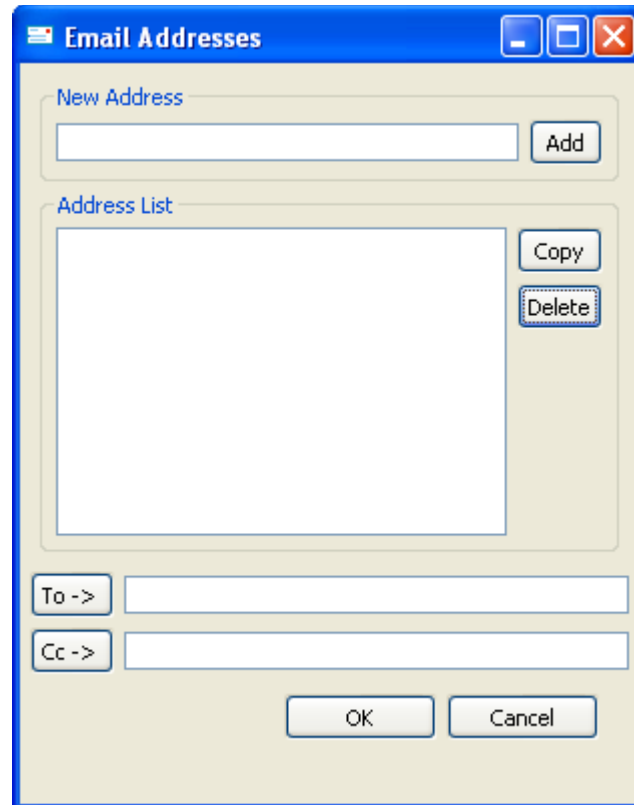

Additional file attachments can be added to the e-mail. A file dialog is launched when the “Attach” button is clicked. The selected file is added to the list of file attachments to be included in the e-mail.

## Sticky Notes



Sticky Notes provides a tool to write, save, print and delete notes for a specific report. A sticky note icon  is displayed in the reports list view for each report row where a sticky note was saved. The sticky note can also be launched by double-clicking the report row in the reports list view. This is a GUI only feature,

and not available in the Application Performance Analyzer ISPF interface.



## Launch Html



The Launch Html action will launch the active report view in the desktop default HTML browser, providing a browser-enabled static version of the Application Performance Analyzer report.

## Print



The Print action provides print functionality for the report. A print dialog is launched in which the printer and page options can be selected and then the report printed.

## Save As



Save As provides functionality to save the report to disk. A file dialog is launched in which the file options and file name can be entered and then the report saved to disk. The figure below shows a report saved to a text file.



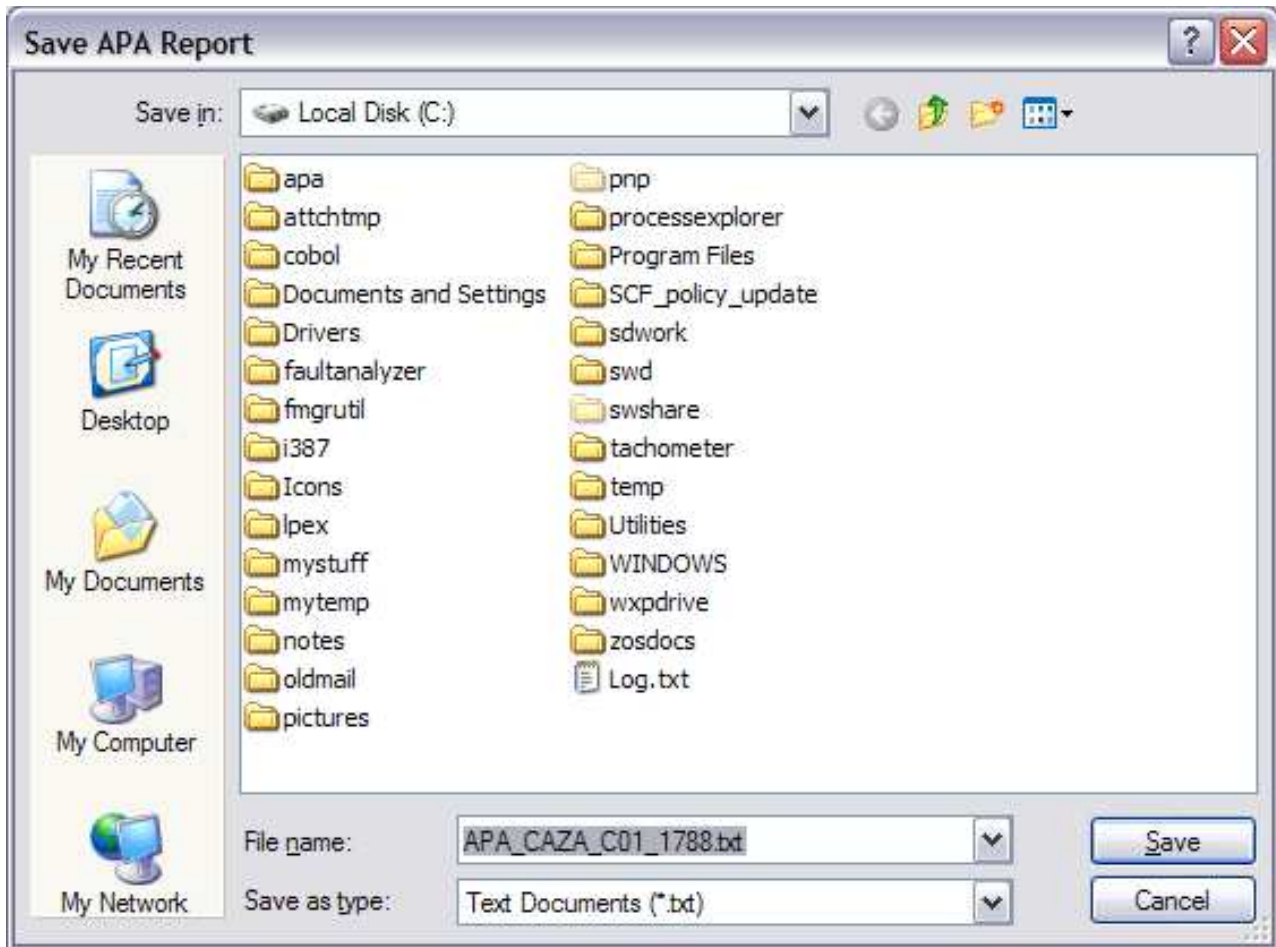


Figure 46. Save As dialog





Figure 48. Find dialog

## Copy



Copy functions like the same Windows command by taking any text that is selected (highlighted) and copying it to the clipboard. Once the text is in the clipboard, it can be pasted (Ctrl + 'V') to other Windows applications. A limit of 200,000 lines can be copied.

The figure below shows a report in which the Select All accelerator key (Ctrl + 'A') is used to copy the complete report. Copy (Ctrl + 'C') is then used to copy to the clipboard, followed by Paste (Ctrl + 'V') to paste the report into Word.

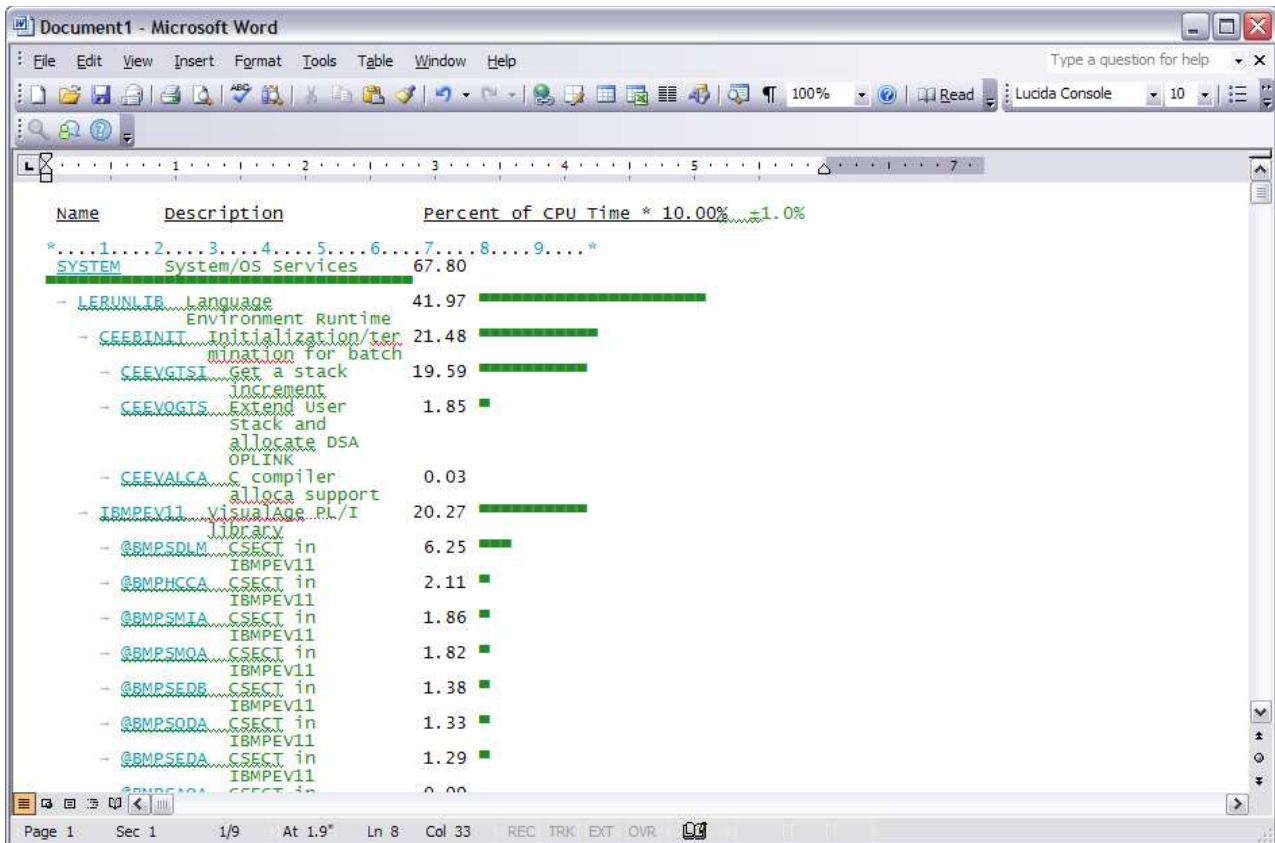


Figure 49. Copy/Paste report to Word sample

## Close report



Close Report closes the report and removes the view from the display.

## Close all reports



Close All Reports closes all reports and removes all Report views from the display. The Report Options view is also closed.

## Context menu

The Report context menu is accessed by a right-mouse button click for both report header and body hyperlinked text only, and is not available for all reports. All menu items except Sort by are available within the report body only. It provides actions which include: Details, DB2 Explain SQL, Sort by, Module Information and Source Program Mapping.

### Details



The Details context menu action displays detailed information for the requested report line. Details are not available for all report lines and all reports. When selected, a new window displays the detail report contents. The nature of the information displayed varies widely depending on the type of item selected. This is the equivalent to entering ‘++’ in the Application Performance Analyzer ISPF interface.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### DB2 Explain SQL

The DB2 Explain SQL context menu action displays detailed SQL query information for the requested report line. DB2 Explain SQL is only available for ‘F’ – DB2 Measurement reports. When selected, a new window will display two tabs; SQL Information and SQL Text.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### SQL Information tab

The SQL Information tab provides a detailed overview of the SQL statement.

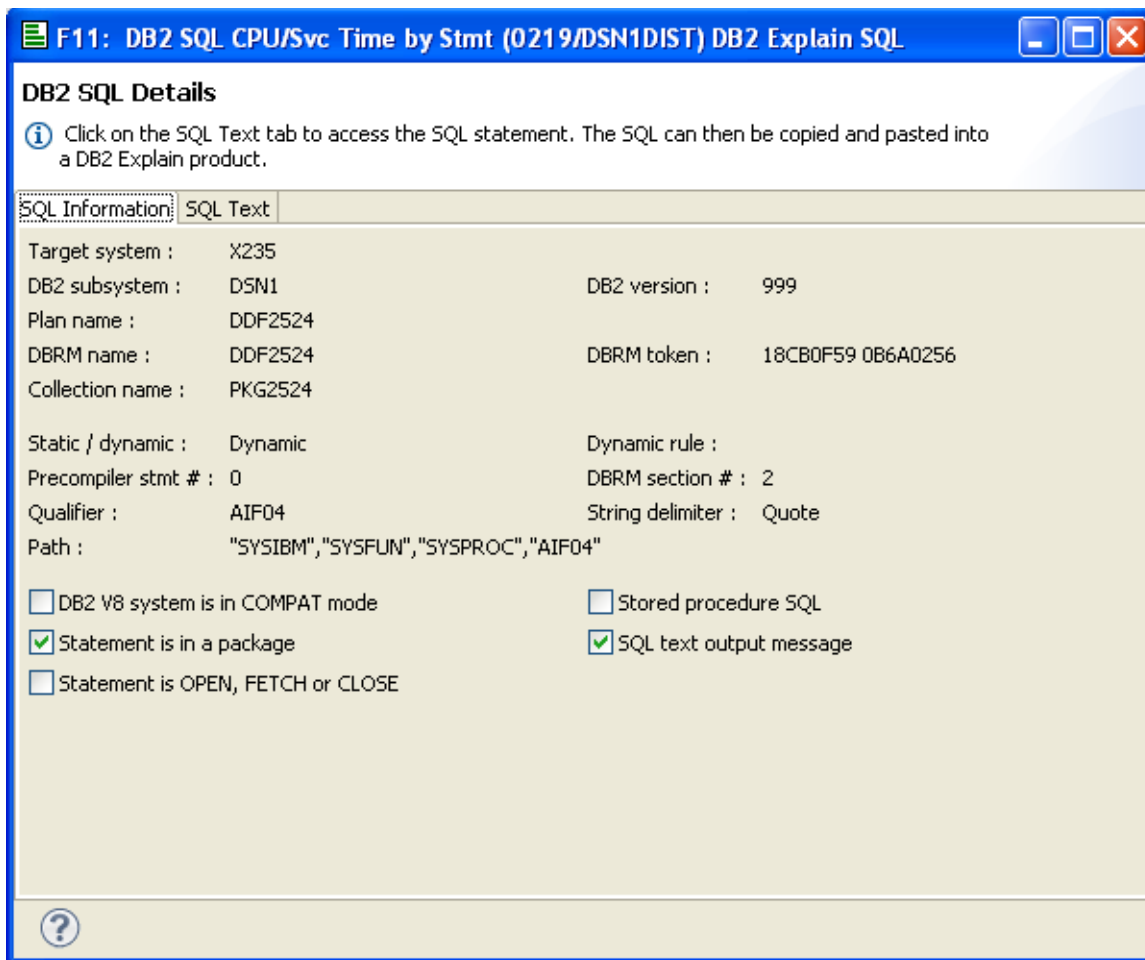


Figure 50. SQL Information tab

## SQL Text tab

The SQL Text tab displays the SQL text statement that can be used as input to DB2 or Visual Explain products. The contents can be copied (Ctrl+A to select all then right mouse-button click and select 'copy' or Ctrl+C) then pasted to an editor or other tool.

**Note:** Display of dynamic SQL text is limited to 15,000 characters.

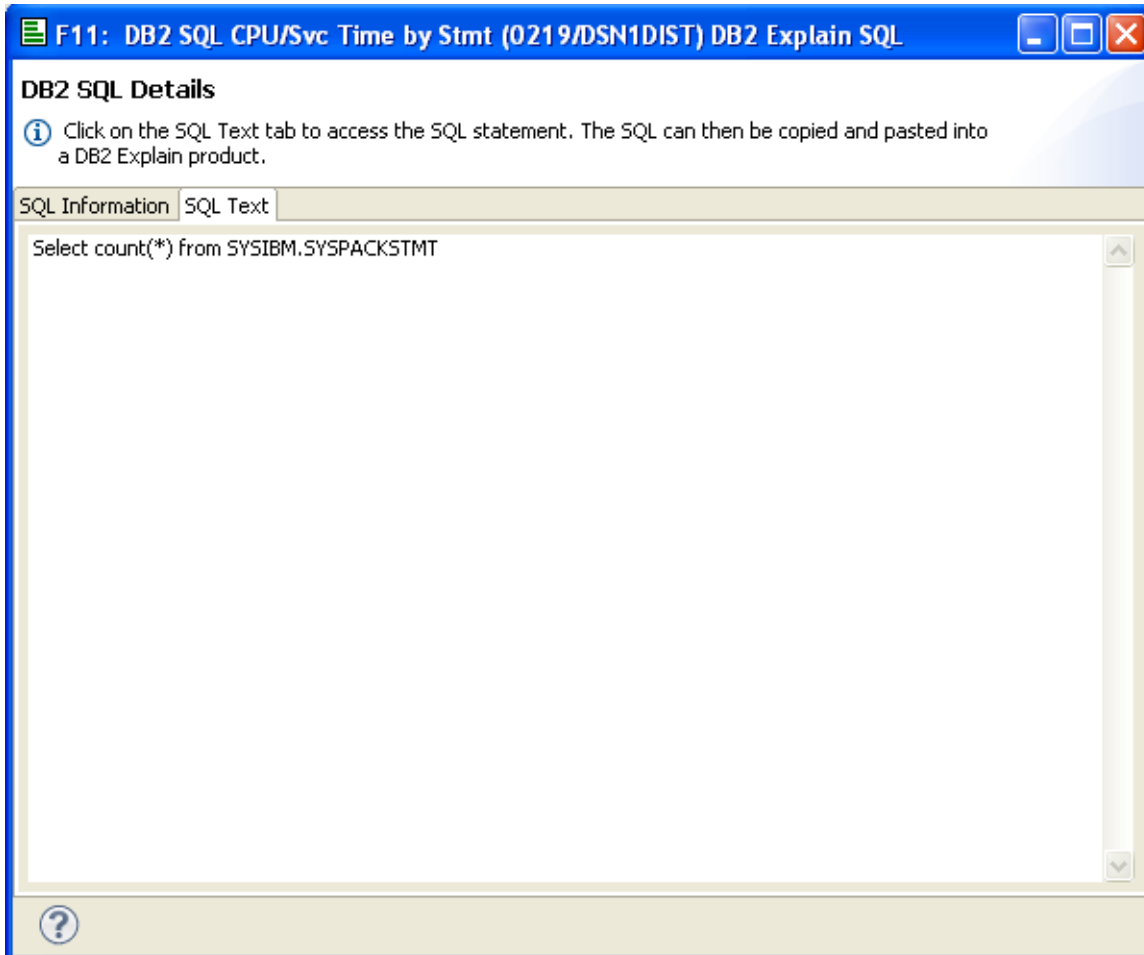


Figure 51. SQL Text tab

## Sort by

The context menu provides sort actions that are unique for each report. The table below lists the report and context menu sort actions that are available for the Application Performance Analyzer GUI. When clicked, the report is sorted in the order of the selected request.

Table 20. Report sort actions

Report	Sort actions
S03	<ol style="list-style-type: none"><li>1. Sort by NAME</li><li>2. Sort by SIZE</li><li>3. Sort by ADDRESS</li><li>4. Sort by LIBRARY</li></ol>

Table 20. Report sort actions (continued)

Report	Sort actions
C01, C02, C05, C06, C07, C08 , C10	1. Sort by NAME 2. Sort by VALUE
C03	1. Sort by VALUE 2. Sort by ADDRESS 3. Sort by LOCATION
C09	1. Sort by VALUE 2. Sort by ADDRESS
D01, D02, D03, D05, D06, D08	1. Sort by NAME 2. Sort by VALUE
W01, W02, W03, W04, W05	1. Sort by NAME 2. Sort by VALUE
H01, H03, H08	1. Sort by VALUE 2. Sort by FILEID 3. Sort by PATHNAME
H02, H05, H09	1. Sort by VALUE 2. Sort by DEVID 3. Sort by DEVICE
H10, H11	1. Sort by VALUE 2. Sort by REQID 3. Sort by REQUEST
I05, I06, I07, I08, I09, I10, I11, I12, I13, I18, I19, I20, I21	1. Sort by NAME 2. Sort by VALUE
E02	1. Sort by NAME 2. Sort by VALUE 3. Sort by COUNT
E03, E04, E05, E06, E07, E08, E09, E10, E11, E12	1. Sort by NAME 2. Sort by VALUE
F02	1. Sort by THREAD 2. Sort by DURATION 3. Sort by CPU
F03, F04, F07, F08, F14	1. Sort by NAME 2. Sort by VALUE
F05, F09	1. Sort by VALUE

Table 20. Report sort actions (continued)

Report	Sort actions
F10, F11, F15, F16, F17, F18, F19	<ol style="list-style-type: none"> <li>1. Sort by NAME</li> <li>2. Sort by VALUE</li> <li>3. Sort by DURATION</li> </ol>
F12	<ol style="list-style-type: none"> <li>1. Sort by DURATION</li> <li>2. Sort by VALUE</li> </ol>
Q02, Q03, Q04, Q05, Q06, Q07, Q08, Q09, Q10	<ol style="list-style-type: none"> <li>1. Sort by NAME</li> <li>2. Sort by VALUE</li> </ol>
J03, J04, J05, J06, J07, J09, J10, J11, J12, J14, J15, J16, J17	<ol style="list-style-type: none"> <li>1. Sort by NAME</li> <li>2. Sort by VALUE</li> </ol>
X01, X02, X03, X04	<ol style="list-style-type: none"> <li>1. Sort by NAME</li> <li>2. Sort by VALUE</li> </ol>
B02, B03, B04, B05, B06, B07, B08, B09, B10, B11	<ol style="list-style-type: none"> <li>1. Sort by CPU</li> <li>2. Sort by SERVICE TIME</li> <li>3. Sort by REQUEST COUNT</li> </ol>

Refer to Chapter 3, “Performance analysis reports,” on page 47 through Chapter 8, “Java/USS/HFS performance analysis reports,” on page 459 for additional details of the individual report sort options.

### Module Information

The Module Information context menu action displays detailed information for the program corresponding to the requested report line. Module information is only available for all report lines related to application programs. When selected, a new window will display the module information contents. The nature of the information displayed varies depending on the type of module displayed. This is the equivalent to entering the ‘M’ line command in the Application Performance Analyzer ISPF interface.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.

### Source Program Mapping

The Source Program Mapping context menu action displays the source code for the program corresponding to the requested report line. Source Program Mapping is only available for report lines related to application programs and requires setup of a source mapping repository, which provides a list of libraries/directories to locate the source code. When selected, a new window displays the source code information contents. The nature of the information displayed varies depending on the type of module displayed. Detail windows for multiple lines can be displayed at once.

**Note:** This action is only available if the z/OS connection has been established and the remote repository is active.



As an example, while viewing the CPU Usage by Category report, shown below, right-mouse button click on the “COBVSAM” report line hyperlink and select the “Source Program Mapping” action.

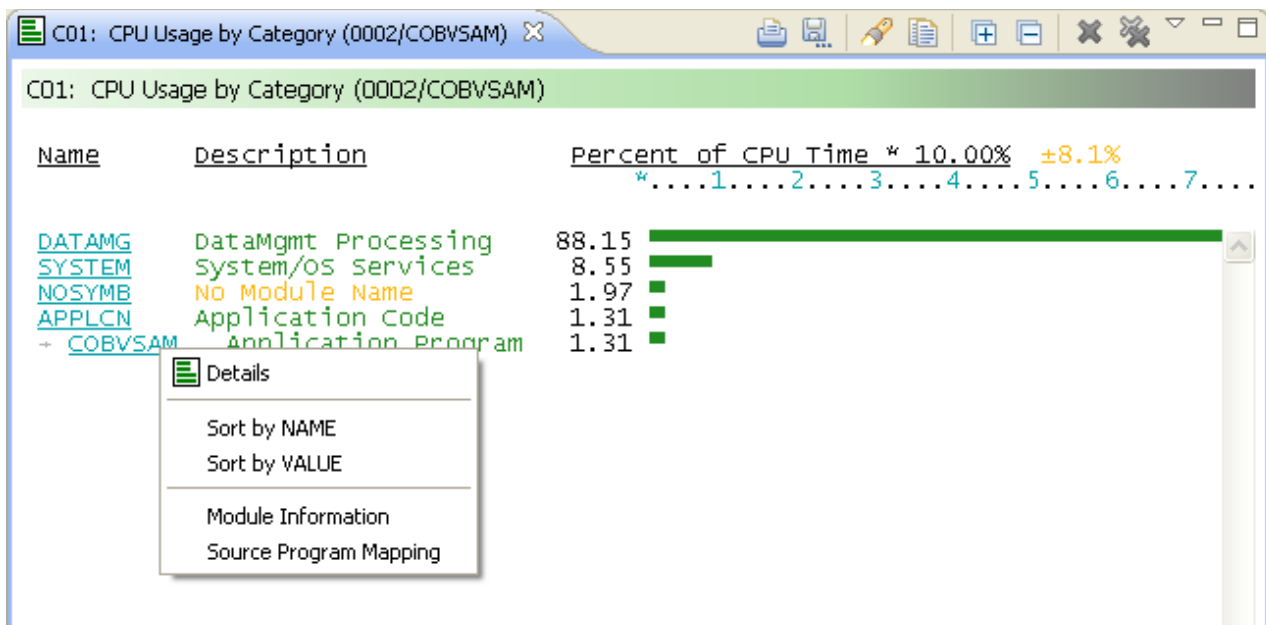


Figure 52. Source program mapping context menu option

A detail window is displayed, showing the source code details of the application module for the “COBVSAM” report line.

A toolbar is available that provides buttons for report detail-level actions, including: Print, Save As, Find and Copy.

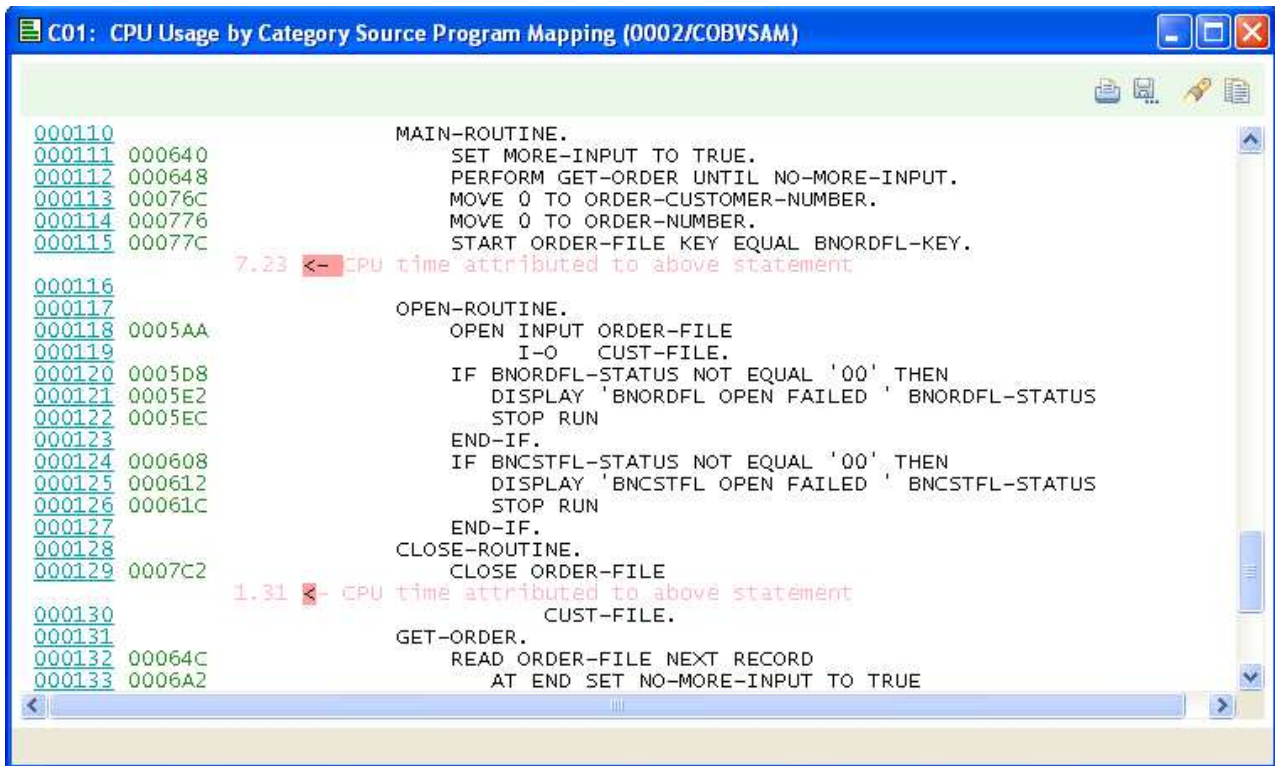


Figure 53. Source program mapping dialog

## Search Results view

The Search Results view, located at the top right side of the Application Performance Analyzer GUI, is opened (activated) after a search request is entered from the Search Observations dialog. A scrollable list of the search results is displayed, including the Observation Request Number, Description and Job Name.

The list can be sorted by clicking on the column header. The Observations List and Observation Detail views are also dynamically refreshed with the current (selected) Search Results view row.

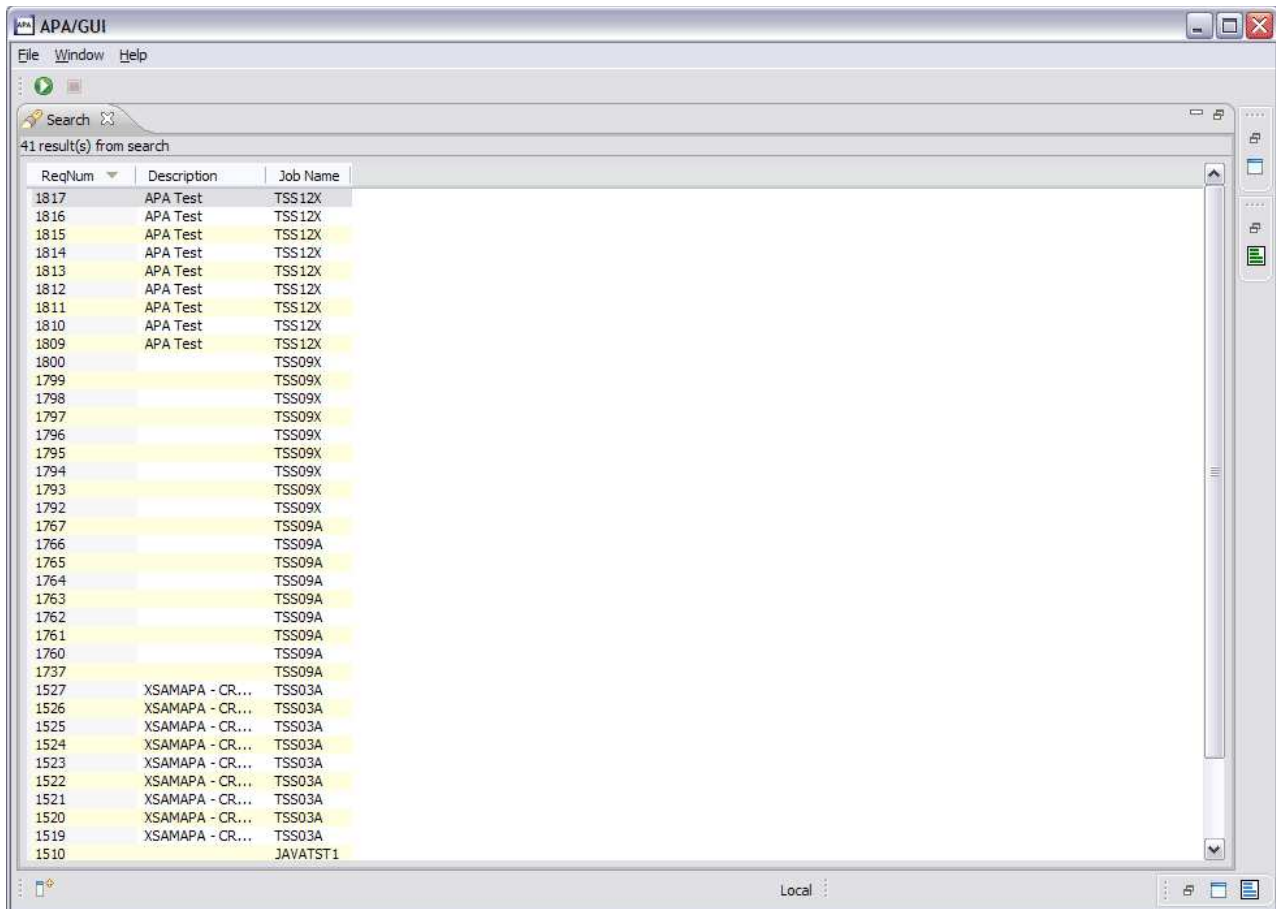


Figure 54. Search Results view

## Help Search view

The Help Search view, located at the top right side of the Application Performance Analyzer GUI, is opened (activated) when the Help Search action from the Help Main Menu bar is selected. It provides a search tool for the Application Performance Analyzer GUI Help documentation.

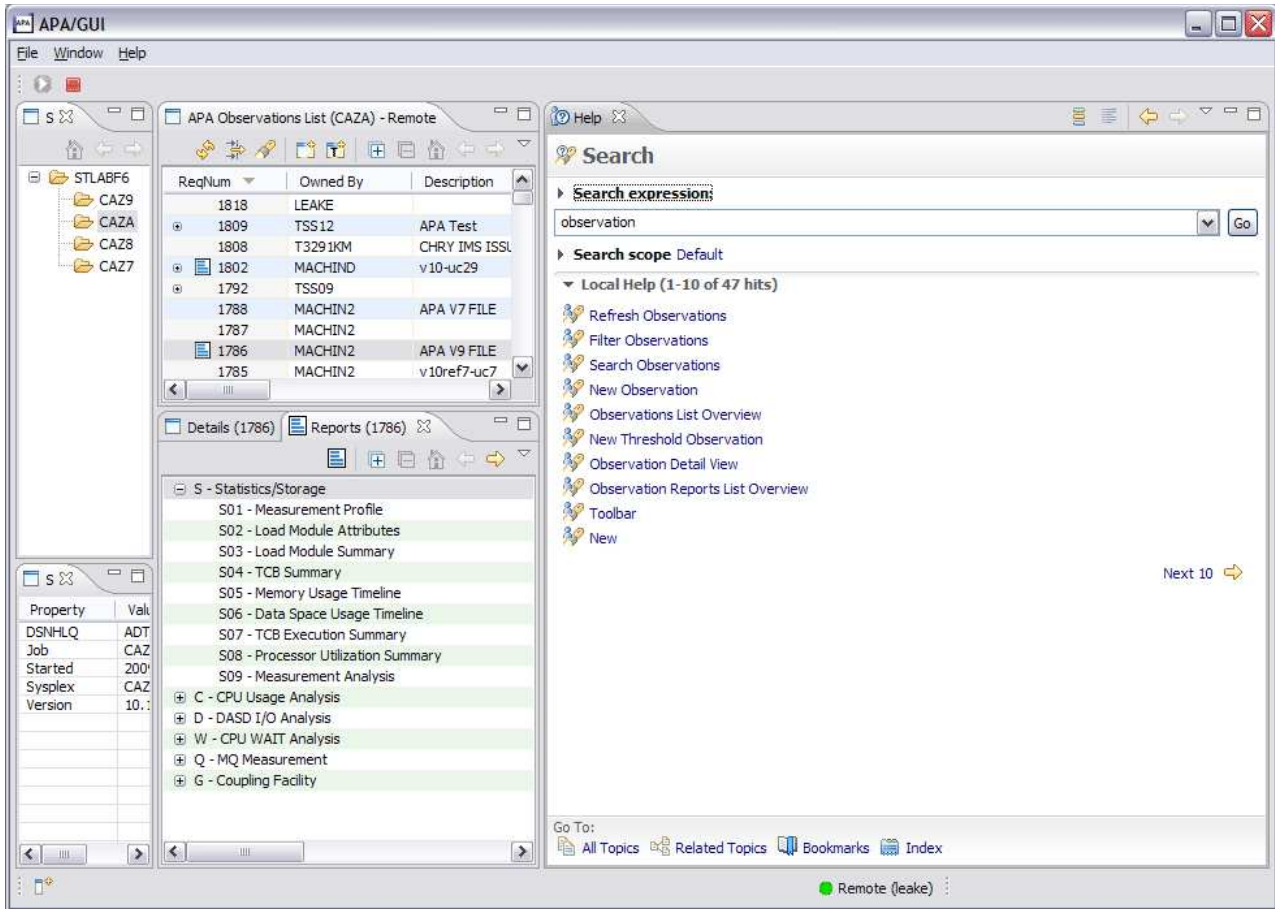


Figure 55. Help Search view

## Configuring and Tuning

### Memory Settings

Application Performance Analyzer is by default, configured to support the download and viewing of most reports. Application Performance Analyzer observations can occasionally produce extremely large reports for which the startup application default memory settings are not sufficient.

To view these large reports, follow the instructions on how to increase the default memory settings that may have been provided with the startup application.

---

## Appendix A. Support resources and problem solving information

This section shows you how to quickly locate information to help answer your questions and solve your problems. If you have to call IBM support, this section provides information that you need to provide to the IBM service representative to help diagnose and resolve the problem.

For a comprehensive multimedia overview of IBM software support resources, see the IBM Education Assistant presentation “IBM Software Support Resources for System z® Enterprise Development Tools and Compilers products” at <http://publib.boulder.ibm.com/infocenter/ieduasst/stgv1r0/index.jsp?topic=/com.ibm.iea.debugt/debugt/6.1z/TrainingEducation/SupportInfoADTools/player.html>.

- “Searching knowledge bases”
- “Getting fixes” on page 801
- “Subscribing to support updates” on page 801
- “Contacting IBM Support” on page 802

---

### Searching knowledge bases

You can search the available knowledge bases to determine whether your problem was already encountered and is already documented.

- “Searching the information center”
- “Searching product support documents”

### Searching the information center

You can find this publication and documentation for many other products in the IBM System z Enterprise Development Tools & Compilers information center at <http://publib.boulder.ibm.com/infocenter/pdthelp/v1r1/index.jsp>. Using the information center, you can search product documentation in a variety of ways. You can search across the documentation for multiple products, search across a subset of the product documentation that you specify, or search a specific set of topics that you specify within a document. Search terms can include exact words or phrases, wild cards, and Boolean operators.

To learn more about how to use the search facility provided in the IBM System z Enterprise Development Tools & Compilers information center, you can view the multimedia presentation at <http://publib.boulder.ibm.com/infocenter/pdthelp/v1r1/index.jsp?topic=/com.ibm.help.doc/InfoCenterTour800600.htm>.

### Searching product support documents

If you need to look beyond the information center to answer your question or resolve your problem, you can use one or more of the following approaches:

- Find the content that you need by using the IBM Support Portal at [www.ibm.com/software/support](http://www.ibm.com/software/support) or directly at [www.ibm.com/support/entry/portal](http://www.ibm.com/support/entry/portal).

The IBM Support Portal is a unified, centralized view of all technical support tools and information for all IBM systems, software, and services. The IBM

Support Portal lets you access the IBM electronic support portfolio from one place. You can tailor the pages to focus on the information and resources that you need for problem prevention and faster problem resolution.

Familiarize yourself with the IBM Support Portal by viewing the demo videos at [https://www.ibm.com/blogs/SPNA/entry/the\\_ibm\\_support\\_portal\\_videos?lang=en\\_us](https://www.ibm.com/blogs/SPNA/entry/the_ibm_support_portal_videos?lang=en_us) about this tool. These videos introduce you to the IBM Support Portal, explore troubleshooting and other resources, and demonstrate how you can tailor the page by moving, adding, and deleting portlets.

Access a specific IBM Software Support site:

- Application Performance Analyzer for z/OS Support
  - Debug Tool for z/OS Support
  - Enterprise COBOL for z/OS Support
  - Enterprise PL/I for z/OS Support
  - Fault Analyzer for z/OS Support
  - File Export for z/OS Support
  - File Manager for z/OS Support
  - WebSphere Developer Debugger for System z Support
  - WebSphere Studio Asset Analyzer for Multiplatforms Support
  - Workload Simulator for z/OS and OS/390® Support
- Search for content by using the IBM masthead search. You can use the IBM masthead search by typing your search string into the Search field at the top of any [ibm.com](http://www.ibm.com)® page.
  - Search for content by using any external search engine, such as Google, Yahoo, or Bing. If you use an external search engine, your results are more likely to include information that is outside the [ibm.com](http://www.ibm.com) domain. However, sometimes you can find useful problem-solving information about IBM products in newsgroups, forums, and blogs that are not on [ibm.com](http://www.ibm.com). Include "IBM" and the name of the product in your search if you are looking for information about an IBM product.
  - The IBM Support Assistant (also referred to as ISA) is a free local software serviceability workbench that helps you resolve questions and problems with IBM software products. It provides quick access to support-related information. You can use the IBM Support Assistant to help you in the following ways:
    - Search through IBM and non-IBM knowledge and information sources across multiple IBM products to answer a question or solve a problem.
    - Find additional information through product and support pages, customer news groups and forums, skills and training resources and information about troubleshooting and commonly asked questions.

In addition, you can use the built in Updater facility in IBM Support Assistant to obtain IBM Support Assistant upgrades and new features to add support for additional software products and capabilities as they become available.

For more information, and to download and start using the IBM Support Assistant for IBM System z Enterprise Development Tools & Compilers products, please visit [http://www.ibm.com/support/docview.wss?rs=2300&context=SSFMHB&dc=D600&uid=swg21242707&loc=en\\_US&cs=UTF-8&lang=en](http://www.ibm.com/support/docview.wss?rs=2300&context=SSFMHB&dc=D600&uid=swg21242707&loc=en_US&cs=UTF-8&lang=en).

General information about the IBM Support Assistant can be found on the IBM Support Assistant home page at <http://www.ibm.com/software/support/isa>.

---

## Getting fixes

A product fix might be available to resolve your problem. To determine what fixes and other updates are available, select a link from the following list:

- Latest PTFs for Application Performance Analyzer for z/OS
- Latest PTFs for Debug Tool for z/OS
- Latest PTFs for Fault Analyzer for z/OS
- Latest PTFs for File Export for z/OS
- Latest PTFs for File Manager for z/OS
- Latest PTFs for Optim™ Move for DB2
- Latest PTFs for WebSphere Studio Asset Analyzer for Multiplatforms
- Latest PTFs for Workload Simulator for z/OS and OS/390

When you find a fix that you are interested in, click the name of the fix to read its description and to optionally download the fix.

Subscribe to receive email notifications about fixes and other IBM Support information as described in [Subscribing to Support updates](#).

---

## Subscribing to support updates

To stay informed of important information about the IBM products that you use, you can subscribe to updates. By subscribing to receive updates, you can receive important technical information and updates for specific Support tools and resources. You can subscribe to updates by using the following:

- RSS feeds and social media subscriptions
- My Notifications

To subscribe to Support updates, follow the steps below.

1. Click My notifications to get started. Click **Subscribe now!** on the page.
2. Sign in My notifications with your IBM ID. If you do not have an IBM ID, create one ID by following the instructions.
3. After you sign in My notifications, enter the name of the product that you want to subscribe in the **Product lookup** field. The look-ahead feature lists products matching what you typed. If the product does not appear, use the **Browse for a product** link.
4. Next to the product, click the **Subscribe** link. A green check mark is shown to indicate the subscription is created. The subscription is listed under Product subscriptions.
5. To indicate the type of notices for which you want to receive notifications, click the **Edit** link. To save your changes, click the **Submit** at the bottom of the page.
6. To indicate the frequency and format of the email message you receive, click **Delivery preferences**. Then, click **Submit**.
7. Optionally, you can click the RSS/Atom feed by clicking **Links**. Then, copy and paste the link into your feeder.
8. To see any notifications that were sent to you, click **View**.

## RSS feeds and social media subscriptions

For general information about RSS, including steps for getting started and a list of RSS-enabled IBM web pages, visit the IBM Software Support RSS feeds site at <http://www.ibm.com/software/support/rss/other/index.html>. For information

about the RSS feed for the IBM System z Enterprise Development Tools & Compilers information center, refer to the Subscribe to information center updates topic in the information center at [http://publib.boulder.ibm.com/infocenter/pdthelp/v1r1/topic/com.ibm.help.doc/subscribe\\_info.html](http://publib.boulder.ibm.com/infocenter/pdthelp/v1r1/topic/com.ibm.help.doc/subscribe_info.html).

## My Notifications

With My Notifications, you can subscribe to Support updates for any IBM product. You can specify that you want to receive daily or weekly email announcements. You can specify what type of information you want to receive (such as publications, hints and tips, product flashes (also known as alerts), downloads, and drivers). My Notifications enables you to customize and categorize the products about which you want to be informed and the delivery methods that best suit your needs.

To subscribe to Support updates, follow the steps below.

1. Click My notifications to get started. Click **Subscribe now!** on the page.
2. Sign in My notifications with your IBM ID. If you do not have an IBM ID, create one ID by following the instructions.
3. After you sign in My notifications, enter the name of the product that you want to subscribe in the **Product lookup** field. The look-ahead feature lists products matching what you typed. If the product does not appear, use the **Browse for a product** link.
4. Next to the product, click the **Subscribe** link. A green check mark is shown to indicate the subscription is created. The subscription is listed under Product subscriptions.
5. To indicate the type of notices for which you want to receive notifications, click the **Edit** link. To save your changes, click the **Submit** at the bottom of the page.
6. To indicate the frequency and format of the email message you receive, click **Delivery preferences**. Then, click **Submit**.
7. Optionally, you can click the RSS/Atom feed by clicking **Links**. Then, copy and paste the link into your feeder.
8. To see any notifications that were sent to you, click **View**.

---

## Contacting IBM Support

IBM Support provides assistance with product defects, answering FAQs, and performing rediscovery.

After trying to find your answer or solution by using other self-help options such as technotes, you can contact IBM Support. Before contacting IBM Support, your company must have an active IBM maintenance contract, and you must be authorized to submit problems to IBM. For information about the types of available support, see the information below or refer to the Support portfolio topic in the Software Support Handbook at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/offerings.html>.

- For IBM distributed software products (including, but not limited to, Tivoli®, Lotus®, and Rational® products, as well as DB2 and WebSphere products that run on Windows, or UNIX operating systems), enroll in Passport Advantage® in one of the following ways:

### Online

Go to the Passport Advantage Web site at [http://www.lotus.com/services/passport.nsf/WebDocs/Passport\\_Advantage\\_Home](http://www.lotus.com/services/passport.nsf/WebDocs/Passport_Advantage_Home) and click **How to Enroll**.



### By phone

For the phone number to call in your country, go to the Contacts page of the *IBM Software Support Handbook* on the Web at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/contacts.html> and click the name of your geographic region.

- For customers with Subscription and Support (S & S) contracts, go to the Software Service Request Web site at <http://www.ibm.com/support/servicerequest>.
- For customers with IBMLink, CATIA, Linux, S/390®, iSeries, pSeries, zSeries, and other support agreements, go to the IBM Support Line Web site at <http://www.ibm.com/services/us/index.wss/so/its/a1000030/dt006>.
- For IBM eServer™ software products (including, but not limited to, DB2 and WebSphere products that run in zSeries, pSeries, and iSeries environments), you can purchase a software maintenance agreement by working directly with an IBM sales representative or an IBM Business Partner. For more information about support for eServer software products, go to the IBM Technical Support Advantage Web site at <http://www.ibm.com/servers/eserver/techsupport.html>.

If you are not sure what type of software maintenance contract you need, call 1-800-IBMSERV (1-800-426-7378) in the United States. From other countries, go to the Contacts page of the *IBM Software Support Handbook* on the Web at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/contacts.html> and click the name of your geographic region for phone numbers of people who provide support for your location.

Complete the following steps to contact IBM Support with a problem:

1. “Define the problem and determine the severity of the problem”
2. “Gather diagnostic information” on page 804
3. “Submit the problem to IBM Support” on page 804

To contact IBM Software support, follow these steps:

## Define the problem and determine the severity of the problem

Define the problem and determine severity of the problem When describing a problem to IBM, be as specific as possible. Include all relevant background information so that IBM Support can help you solve the problem efficiently.

IBM Support needs you to supply a severity level. Therefore, you need to understand and assess the business impact of the problem that you are reporting. Use the following criteria:

### Severity 1

The problem has a **critical** business impact. You are unable to use the program, resulting in a critical impact on operations. This condition requires an immediate solution.

### Severity 2

The problem has a **significant** business impact. The program is usable, but it is severely limited.

### Severity 3

The problem has **some** business impact. The program is usable, but less significant features (not critical to operations) are unavailable.

#### Severity 4

The problem has **minimal** business impact. The problem causes little impact on operations, or a reasonable circumvention to the problem was implemented.

For more information, see the Getting IBM support topic in the Software Support Handbook at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/getsupport.html>.

### Gather diagnostic information

To save time, if there is a Mustgather document available for the product, refer to the Mustgather document and gather the information specified. Mustgather documents contain specific instructions for submitting your problem to IBM and gathering information needed by the IBM support team to resolve your problem. To determine if there is a Mustgather document for this product, go to the product support page and search on the term Mustgather. At the time of this publication, the following Mustgather documents are available:

- Mustgather: Read first for problems encountered with Application Performance Analyzer for z/OS: [http://www.ibm.com/support/docview.wss?rs=2300&context=SSFMHB&q1=mustgather&uid=swg21265542&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=2300&context=SSFMHB&q1=mustgather&uid=swg21265542&loc=en_US&cs=utf-8&lang=en)
- Mustgather: Read first for problems encountered with Debug Tool for z/OS: [http://www.ibm.com/support/docview.wss?rs=615&context=SSGTSD&q1=mustgather&uid=swg21254711&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=615&context=SSGTSD&q1=mustgather&uid=swg21254711&loc=en_US&cs=utf-8&lang=en)
- Mustgather: Read first for problems encountered with Fault Analyzer for z/OS: [http://www.ibm.com/support/docview.wss?rs=273&context=SSXJAJ&q1=mustgather&uid=swg21255056&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=273&context=SSXJAJ&q1=mustgather&uid=swg21255056&loc=en_US&cs=utf-8&lang=en)
- Mustgather: Read first for problems encountered with File Manager for z/OS: [http://www.ibm.com/support/docview.wss?rs=274&context=SSXJAV&q1=mustgather&uid=swg21255514&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=274&context=SSXJAV&q1=mustgather&uid=swg21255514&loc=en_US&cs=utf-8&lang=en)
- Mustgather: Read first for problems encountered with Enterprise COBOL for z/OS: [http://www.ibm.com/support/docview.wss?rs=2231&context=SS6SG3&q1=mustgather&uid=swg21249990&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=2231&context=SS6SG3&q1=mustgather&uid=swg21249990&loc=en_US&cs=utf-8&lang=en)
- Mustgather: Read first for problems encountered with Enterprise PL/I for z/OS: [http://www.ibm.com/support/docview.wss?rs=619&context=SSY2V3&q1=mustgather&uid=swg21260496&loc=en\\_US&cs=utf-8&lang=en](http://www.ibm.com/support/docview.wss?rs=619&context=SSY2V3&q1=mustgather&uid=swg21260496&loc=en_US&cs=utf-8&lang=en)

If the product does not have a Mustgather document, please provide answers to the following questions:

- What software versions were you running when the problem occurred?
- Do you have logs, traces, and messages that are related to the problem symptoms? IBM Software Support is likely to ask for this information.
- Can you re-create the problem? If so, what steps were performed to re-create the problem?
- Did you make any changes to the system? For example, did you make changes to the hardware, operating system, networking software, and so on.
- Are you currently using a workaround for the problem? If so, be prepared to explain the workaround when you report the problem.

### Submit the problem to IBM Support

You can submit your problem to IBM Support in one of three ways:

**Online using the IBM Support Portal**

Click **Service request** on the IBM Software Support site at <http://www.ibm.com/software/support>. On the right side of the Service request page, expand the Product related links section. Click Software support (general) and select ServiceLink/IBMLink to open an Electronic Technical Response (ETR). Enter your information into the appropriate problem submission form.

**Online using the Service Request tool**

The Service Request tool can be found at <http://www.ibm.com/software/support/servicerequest>.

**By phone**

Call 1-800-IBMSERV (1-800-426-7378) in the United States or, from other countries, go to the Contacts page of the *IBM Software Support Handbook* at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/contacts.html> and click the name of your geographic region.

If the problem you submit is for a software defect or for missing or inaccurate documentation, IBM Support creates an Authorized Program Analysis Report (APAR). The APAR describes the problem in detail. Whenever possible, IBM Support provides a workaround that you can implement until the APAR is resolved and a fix is delivered. IBM publishes resolved APARs on the IBM Support website daily, so that other users who experience the same problem can benefit from the same resolution.

After a Problem Management Record (PMR) is open, you can submit diagnostic MustGather data to IBM using one of the following methods:

- FTP diagnostic data to IBM. For more information, refer to <http://www.ibm.com/support/docview.wss?rs=615&tuid=swg21154524>.
- If FTP is not possible, email diagnostic data to [techsupport@mainz.ibm.com](mailto:techsupport@mainz.ibm.com). You must add PMR xxxxx bbb ccc in the subject line of your email. xxxxx is your PMR number, bbb is your branch office, and ccc is your IBM country code. Go to <http://itcenter.mainz.de.ibm.com/ecurep/mail/subject.html> for more details.

Always update your PMR to indicate that data has been sent. You can update your PMR online or by phone as described above.



---

## Appendix B. Creating side files using CAZLANGX

Refer to chapter *Quick start guide for compiling and assembling programs for use with IBM Problem Determination Tools products in IBM Problem Determination Tools for z/OS Common Component: Customization Guide and User Guide* for the recommended method of preparing your programs for use with the IBM Problem Determination Tools products. Alternatively, you may use LANGX side files for your source information files in *Application Performance Analyzer*. This appendix explains the process required to create side files from compiler listings, using the program CAZLANGX. The CAZLANGX module resides in the *Problem Determination Tools for z/OS Common Component library SIPVMODA*.

The sample JCL below:

- Allocates a new data set *yourhlq.CAZLANGX* to hold the side file, which will be created in the next step.
- Compiles an Enterprise COBOL program.

**Note:** You can only compile one program per compile step in order to name the compiler listing PDS(E) member (if using a partitioned data set), and to ensure that only one compiler listing is written to the output file.

- Executes CAZLANGX to process the listing and store it as a side file where Application Performance Analyzer can access it.
- Writes the listing as part of the job output.

The sample JCL is provided as member CAZSCMPS in the *hlq.SCAZSAMP* data set.

```
//CAZSCMPS JOB <JOB PARAMETERS>
//          JCLLIB ORDER=(IGY.V3R3M0.SIGYPROC) <== INSTALLATION
//*                                     IGYWC PROC
//*****
//*   Licensed Materials - Property of IBM          *
//*   5697-N37                                     *
//*   (C) Copyright IBM Corp. 2005                 *
//*                                               *
//*   All Rights Reserved                         *
//*   US Government Users Restricted Rights - Use, duplication *
//*   or disclosure restricted by GSA ADP Schedule Contract *
//*   with IBM Corp.                               *
//*****
//*                                               *
//*           IBM Application Performance Analyzer for z/OS      *
//*           Version 1 Release 1 Modification 0                 *
//*                                               *
//* This JCL compiles a COBOL program and produces a side file *
//* from the program listing that Application Performance       *
//* Analyzer uses to obtain the source information.             *
//* The compiled output is then written to SYSUT2 in the      *
//* IEBGENER step.                                             *
//*                                               *
//* CAUTION: This is neither a JCL procedure nor a complete   *
//* job. Before using this job step, you will have to         *
//* make the following modifications:                           *
//*                                               *
//* 1) Add the job parameters to meet your system requirements. *
//* 2) This job invokes the COBOL procedure IGYWC.             *
//*   Update the procedure library name on the JCLLIB          *
//*   statement as appropriate.                                *
```

```

/** 3) Change "#hlq" to the appropriate high-level qualifier.  *
/** 4) Change "#yourhlq" to the appropriate high-level      *
/**      qualifier.                                          *
/**                                                         *
/*******
/**
/** Pre-allocate data set CAZLANGX to which the side file
/** will be written.
/**
/**ALLOC      EXEC PGM=IEFBRI4
/**CAZLANGX DD DSN=#yourhlq.CAZLANGX,DISP=(NEW,CATLG),
/**          UNIT=SYSALLDA,SPACE=(TRK,(20,20,10)),
/**          DCB=(RECFM=VB,LRECL=1562,BLKSIZE=0)
/**
/** Compile a COBOL program.
/**
/**CBLRUN     EXEC IGYWC,PARM.COBOL='LIST,MAP,SOURCE,XREF'
/**COBOL.SYSIN DD DATA,DLM='##'
CBL APOST,NOOPT,DYNAM,SSRANGE,RENT
    IDENTIFICATION DIVISION.
    PROGRAM-ID. CAZSCBL1
    ENVIRONMENT DIVISION.
    INPUT-OUTPUT SECTION.
    FILE-CONTROL.
    DATA DIVISION.
    FILE SECTION.

    WORKING-STORAGE SECTION.
    01 FILLER                PIC X(20) VALUE 'WORKING-STORAGE'.
    01 NUMBERX PIC 999999 COMP-3.
    01 ERROR-FLD.
       05 ERROR-COUNT PIC 999999 COMP-3.
       05 FLDY REDEFINES ERROR-COUNT.
       07 FLDZ PIC XXXX.
    01 BAD-RESULT PIC 99 COMP-3.

    PROCEDURE DIVISION.
    MAIN SECTION.
        DISPLAY '*** CAZSCBL1 - START OF PROGRAM'.
    LOOP SECTION.
    START000.
        MOVE 3 TO ERROR-COUNT.
        ADD 986885 TO ERROR-COUNT GIVING NUMBERX.
        MOVE 'ABCD' TO FLDZ.
        IF NUMBERX > 0 THEN PERFORM CLEAR.
        DISPLAY '*** CAZSCBL1 - END OF PROGRAM'.
        GOBACK.
    CLEAR SECTION.
    START001.
        DIVIDE NUMBERX BY ERROR-COUNT GIVING BAD-RESULT.
        EXIT.
    END PROGRAM CAZSCBL1.

##
/**COBOL.SYSPRINT DD DSN=&&COBLIST(CAZSCBL1),
/**          DISP=(,PASS),SPACE=(TRK,(10,5,5),RLSE),
/**          DCB=(RECFM=FBA,LRECL=133,BLKSIZE=0)
/**
/** Create a side file.
/**
/**CAZLANGX EXEC PGM=CAZLANGX,REGION=4096K,
/** PARM='CAZSCBL1 (COBOL ERROR '
/**STEPLIB DD DISP=SHR,DSN=#hlq.SIPVMODA
/**LISTING DD DISP=(OLD,PASS),DSN=&&COBLIST
/**IDILANGX DD DISP=SHR,DSN=#yourhlq.CAZLANGX
/**SYSUDUMP DD SYSOUT=*
/**
/** Print the COBOL listing.

```

```

/**
//IEBGENER EXEC PGM=IEBGENER,REGION=4096K
//SYSUT1 DD DISP=OLD,DSN=&&COBLIST(CAZSCBL1)
//SYSUT2 DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
/**

```

**Note:** **1** DDname must be LISTING for all types of compiler listings, or SYSADATA for an assembler SYSADATA file.

After you have created and stored a side file, there is no benefit to Application Performance Analyzer in retaining the listing.

If you already have listings, you can turn them into side files. Here is sample JCL to do this:

```


//CAZLANGX JOB <JOB PARAMETERS>
//*****
/* This job produces a side file from a program listing
/* that Application Performance Analyzer can use
/* for obtaining source information.
/* This particular example is set up for a COBOL extraction
/* from CAZ.LISTING.COBOL(COBOLA) to CAZ.CAZLANGX
//*****
//CAZLANGX EXEC PGM=CAZLANGX,REGION=4096K,
// PARM='COBOLA (COBOL ERROR'
//STEPLIB DD DISP=SHR,DSN=#hlq.SIPVMODA
//LISTING DD DISP=SHR,DSN=yourhlq.LISTING.COBOL 1
//IDILANGX DD DISP=SHR,DSN=yourhlq.CAZLANGX
//SYSUDUMP DD SYSOUT=*

```

**Note:** **1** DDname must be LISTING for all types of compiler listings, or SYSADATA for an assembler SYSADATA file.

## CAZLANGX parameters

The PARM string passed to CAZLANGX should contain:

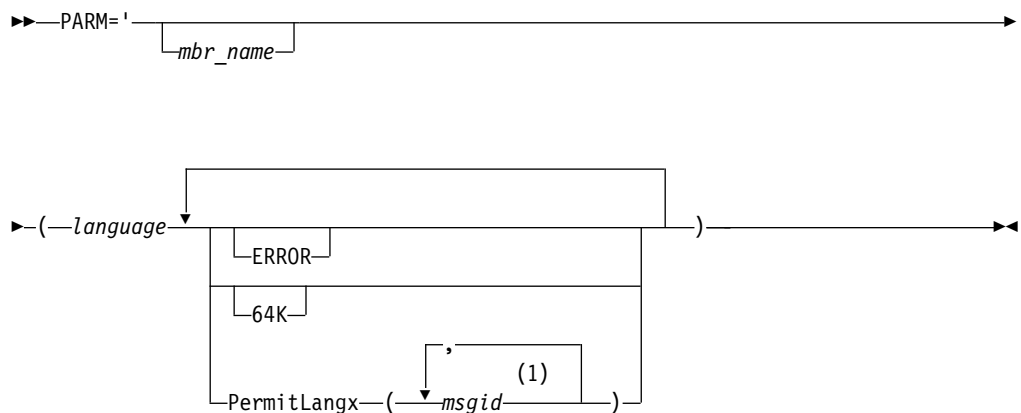

### Notes:

- 1 Either a comma or a blank character is permitted as a delimiter.

## Parameters

### *mbr\_name* (Optional)

The compiler listing or ADATA file member name in the input data set identified by the LISTING DD name (for a compiler listing) or the SYSADATA DD name (if an ADATA file). If this parameter is omitted, the JCL must specify for the compiler listing or ADATA file, either a sequential data set, or a PDS(E) data set with member name. Also, the output CAZLANGX member will be named according to the input program name. In the case of COBOL, for example, this is the name found on the PROGRAM-ID source line.

### *language* (Required)

The language of the compiler listing or ADATA file. The options are:

- COBOL
- PLI
- ASM

### **ERROR** (Optional)

A parameter that provides additional diagnostics on variables for which information is incomplete.

### **64K** (Optional)

A parameter that provides side file compatibility with Debug Tool for z/OS. For more information see, "Side file compatibility with Debug Tool for z/OS."

### **PermitLangx** (*msgid*, ...) (Optional)

A parameter that specifies message IDs for compiler error messages that should be ignored.

---

## Side file compatibility with Debug Tool for z/OS

If using Debug Tool for z/OS, the 64K option should be included as stated for Debug Tool EQALANGX when generating side files with the Debug Tool EQALANGX or the Application Performance Analyzer CAZLANGX utilities. This option is also recognized by CAZLANGX, and the side file produced by EQALANGX or CAZLANGX, will then be usable by both Debug Tool and Application Performance Analyzer.

For details of how to specify the 64K option, see "CAZLANGX parameters" on page 809.

---

## Including a CAZLANGX step in your SCLM translator

If you use the ISPF/PDF Software Configuration and Library Manager (SCLM) to manage your application software, then you might want to include a CAZLANGX step in your SCLM translator, since Application Performance Analyzer side files generally take up less disk space than compiler listings. Shown in the following are examples of a CAZLANGX step inserted into a High Level Assembler and a COBOL SCLM translator.

### High Level Assembler SCLM example

```
*          SYSADATA DDNAME used in HLASM step.
*          (* SYSADATA *)
*          FLMALLOC IOTYPE=W,DDNAME=SYSADATA,RECFM=VB,RECNUM=9000,    C
*          LRECL=8188,BLKSIZE=8192,PRINT=Y
*
*
```



```

* CAZLANGX BUILD TRANSLATOR
*
      FLMTRNSL  CALLNAM='CAZLANGX',          C
              FUNCTN=BUILD,                  C
              COMPILE=CAZLANGX,              C
              DSNAME=#h1q.SIPVMODA,          C
              VERSION=3.5.2,                 C
              GOODRC=0,                       C
              PORDER=1,                       C
              OPTIONS='@@FLMMBR(ASM ERROR OFT CAZLANGX FAULT'
*
*      (* SYSADATA *)
      FLMALLOC  IOTYPE=U,DDNAME=SYSADATA
*
*      (* CAZLANGX *)
      FLMALLOC  IOTYPE=P,DDNAME=IDILANGX,DFLTYP=IDILANGX,  C
              KEYREF=OUT2,BLKSIZE=27998,LRECL=1562,RECFM=VB,  C
              RECNUM=10000,DIRBLKS=50,DFLTMEM=*

```

## COBOL SCLM example

```

*****
*      --COPY SYSPRINT FILE TO LISTING
*      The COPYFILE EXEC, in dataset PDFTDEV.PROJDEFS.EXEC contains the
*      following:
*
*      /* REXX */
*      /*****
*      /* Copy file I to file 0.  Both are assumed to be pre-allocated.      */
*      /*****
*      PARSE UPPER ARG I","0 .
*      "EXECIO * DISKR "I" (STEM R. FINIS "
*      "EXECIO * DISKW "0" (STEM R. FINIS "
*      RETURN
*
*****
*
      FLMTRNSL  CALLNAM='COPY FILES          ',          C
              FUNCTN=BUILD,                  C
              COMPILE=COPYFILE,              C
              DSNAME=PDFTDEV.PROJDEFS.EXEC,  C
              CALLMETH=TSOLNK,               C
              VERSION=1.0,                   C
              PORDER=1,                       C
              OPTIONS=(SYSPRINT,LISTING),     C
              GOODRC=0
      FLMALLOC  IOTYPE=W,RECFM=VBA,LRECL=133,      C
              RECNUM=90000,DDNAME=LISTING
*
      FLMTRNSL  CALLNAM='CAZLANGX',          C
              FUNCTN=BUILD,                  C
              COMPILE=CAZLANGX,              C
              DSNAME=#h1q.SIPVMODA,          C
              VERSION=3.5.2,                 C
              GOODRC=0,                       C
              PORDER=1,                       C
              OPTIONS='@@FLMMBR(COBOL ERROR OFT CAZLANGX FAULT'
*
*      (* LISTING *)
      FLMALLOC  IOTYPE=U,DDNAME=LISTING
*
*      (* CAZLANGX *)
      FLMALLOC  IOTYPE=P,DDNAME=CAZLANGX,DFLTYP=CAZLANGX,  C
              KEYREF=OUT2,BLKSIZE=27998,LRECL=1562,RECFM=VB,  C
              RECNUM=10000,DIRBLKS=50,DFLTMEM=*

```

---

## COBOL Report Writer Precompiler

If you are using the COBOL Report Writer Precompiler (program number 5798-DYR), it is important that you run it as a stand-alone precompiler as opposed to invoking it via the COBOL compiler EXIT option. Otherwise, information that is required by Application Performance Analyzer to identify the point of failure source code statement might be missing from the compiler listing.

Symptoms that you might experience if using the COBOL Report Writer Precompiler as a COBOL compiler exit are:

- Return code 3114 from CAZLANGX if trying to convert the COBOL compiler listing file to a side file.
- The following messages issued during fault analysis:
  - IDISF8100S COBOL LISTING file contains NO recognized records
  - IDISF8132S Input or Output file format invalid
- Failure to determine point of failure source line.

---

## Required compiler options for creating listings or CAZLANGX side files

The following are the compiler options needed to produce listings or CAZLANGX side files suitable for Application Performance Analyzer:

### OS/VS COBOL:

- DMAP
- NOCLIST
- NOLST
- NOOPT (Note 1)
- PMAP
- SOURCE
- VERB
- XREF

### COBOL compilers (other than OS/VS COBOL):

- LIST,NOOFFSET (Note 2)
- NOOPT (Note 1)
- MAP
- SOURCE
- XREF(SHORT) (Note 3)

### VisualAge® PL/I:

- AGGREGATE
- ATTRIBUTES(FULL)
- LIST
- NEST
- OPTIONS
- SOURCE
- XREF(FULL)

**Enterprise PL/I:**

- AGGREGATE
- ATTRIBUTES(FULL)
- LIST
- MAP
- NEST
- SOURCE
- STMT
- NONNUMBER
- OFFSET
- XREF(FULL)
- OPTIONS
- NOBLKOFF

**PL/I compilers (other than VisualAge PL/I and Enterprise PL/I):**

- AGGREGATE
- ATTRIBUTES(FULL)
- ESD
- LIST
- MAP
- NEST
- OPTIONS
- SOURCE
- STMT
- XREF(FULL)

**Assembler:**

- ADATA

**C/C++:**

- LIST
- NOOFFSET

**Note:**

1. Although NOOPT is recommended, the use of OPTIMIZE is allowed (including OPT(1) or OPT(2) for C) , in which case the compiler merges and rearranges statement numbers in the compiled code. The Application Performance Analyzer analysis will be limited to what can be determined from the optimized compiler listing, which can vary from having no effect on the Application Performance Analyzer report, to inaccurate identification of the source line that failed. The source line number will usually be close, but not necessarily accurate with OPTIMIZE. It is dependent on the compiler's rearrangement or elimination of source statements during its optimization processing.
2. Although LIST and NOOFFSET are recommended, the use of NOLIST and OFFSET is allowed, in which case Application Performance Analyzer will not be able to warn the user if the compiler listing is not a good match with what is in storage.

3. XREF(SHORT) is a minimum requirement; XREF(FULL) is permitted and has no detrimental effect.
4. ATTRIBUTES is a minimum requirement; ATTRIBUTES(FULL) is permitted and has no detrimental effect.

## TEST option considerations

With all compilers, the additional use of the TEST option may provide program information in addition to what is available via the side files.

If TEST(,SEPARATE) is used when compiling a COBOL program, then a COBOL SYSDEBUG file is written.

If the SYSDEBUG file is to be used instead of a compiler listing, or a CAZLANGX side file created from a compiler listing, then it should be retained for use by Debug Tool for z/OS and Application Performance Analyzer.

## Naming compiler listings or side files

Store compiler listings or side files in sequential data sets, or as members of PDS(E) data sets.

If stored in PDS(E) data sets, then the member name must be equal to the primary entry point name or CSECT name of your application program. If the application program contains multiple CSECTs, then they must be compiled separately in order to create separate compiler listing or side file members. If you store with any other name, Application Performance Analyzer will be unable to find the side file or listing.

**Note:** The PL/I compiler typically renames CSECTs according to an internal compiler algorithm. Therefore, it is not recommended to store PL/I compiler listings or side files using CSECT names as they might not be found by Application Performance Analyzer. Instead, use the primary entry point name.

If compiler listings or side files are stored in sequential data sets, and the data set names follow a convention that permits the program name to be part of the data set name, then the specification of these data sets in the DataSets option can be done easily using variable substitution.

## Naming CSECTs for Application Performance Analyzer

To facilitate source code information, Application Performance Analyzer must be able to match CSECT names with the compiler listings or side files provided. For this to be possible, all CSECTs must be named. Whereas the names of CSECTs in programs written in most high-level languages are automatically assigned, special requirements apply to programs written assembler, as explained in the following. Failure to follow these requirements will prevent source code information from being determined for these types of programs.

### Assembler programs

It is a requirement that CSECTs in assembler programs are named using either:

- csect\_name CSECT
- csect\_name START

If using a PDS(E), the csect\_name must match the SYSADATA or side file data set member name.

## Compiler listings and side file attributes

Compiler listings and side files must be allocated using the following attributes:

### DDname Attributes:

#### CAZADATA

Sequential data set or PDS(E), RECFM=VB, LRECL=8188

#### CAZLC

Sequential data set or PDS(E), and either:

- RECFM=VB or VBA and LRECL=137
- RECFM=FB or FBA and LRECL=133

#### CAZLCOB

Sequential data set or PDS(E), RECFM=FBA, LRECL=133

#### CAZLCOBO

Sequential data set or PDS(E), RECFM=FBA, LRECL=121

#### CAZSYSDB

Sequential data set or PDS(E), RECFM=FB, LRECL=1024

#### CAZLANGX

Sequential data set or PDS(E), RECFM=VB, LRECL=1562

#### CAZLPLI

Sequential data set or PDS(E), RECFM=VBA, LRECL=125

#### CAZLPLIE

Sequential data set or PDS(E), RECFM=VBA, LRECL=137

For variable length records, the indicated record lengths (LRECL) are minimum values.

In order for Application Performance Analyzer to read the compiler listings or side files, they must not be allocated as temporary data sets (for example, using &&dsname-type data set names in your JCL).

For the purpose of conserving disk space, compiler listings can be stored in ISPF packed format. This is done by using the PACK ON option from within ISPF edit of the file. The ISPF packed format is not permitted for IDILANGX or IDIADATA data sets.



---

## Appendix C. XML document layout

This appendix describes the layout of the XML documents and associates each element to the matching field in the online report.

---

### XML declaration

The XML declaration is included as the first line in the document. It describes the version, encoding and standalone attributes as follows:

```
<?xml version="1.0" encoding="ebcdic-cp-us" standalone="yes" ?>
```

---

### Root tag

The tag pair `<ReportSet>` and `</ReportSet>` define the root element.

---

### Layout standards

Immediately following the root tag `<ReportSet>`, elements describing the details of the completed request are enclosed within a `<MeasurementInformation>` and `</MeasurementInformation>` tag pair. This data is viewed online by typing the line command “++” on top of the Request Number on the R02 panel.

The data for individual report sections (e.g., S01, C02, etc.) follow the `</MeasurementInformation>` closing tag and are enclosed within separate `<Report>` and `</Report>` tag pairs.

Immediately following the `<Report>` tag, every report section contains the following 4 common elements:

- `<ReportId>Report Code</ReportId>`
- `<ReportName>Report Name</ReportName>`
- `<MarginOfError>Margin of Error %</MarginOfError>`
- `<MeasurementDivisor>Measurement Divisor</MeasurementDivisor>`

*Report Code* and *Report Name* are unique for each report. The *Margin of Error %* value reflects the level of precision calculated for the report. When margin of error is not applicable for a report, this value is empty. The *Measurement Divisor* value contains the total number of samples taken and is used to calculate percentages in the report. Where there are no percentages presented in the report, this value is empty.

In the following tables, numeric data is represented by *n*, regardless of the size and format of the data.

---

### Measurement information

The measurement information data is displayed online after typing the line command “++” on top of the Request Number in the R02 panel. In the XML document file, this data is enclosed within the `<MeasurementInformation>` and `</MeasurementInformation>` tag pair. The table below lists the sub elements for this data.

Field title in online report	XML element
	<MeasurementTaskId>stcid</MeasurementTaskId>
	<MeasurementVersionNumber>version</MeasurementVersionNumber>
	<MeasurementAPARNumber>APAR</MeasurementAPARNumber>
Request Number	<RequestNumber>nnnn</RequestNumber>
Request Description	<RequestDescription>description</RequestDescription>
Request Status	<RequestStatus>status</RequestStatus>
Owner Id	<OwnerId>owner</OwnerId>
Time of Request	<TimeOfRequest>Day Mon-dd-yyyy hh:mm:ss</TimeOfRequest>
Session Start Time	<SessionStartTime>Day Mon-dd-yyyy hh:mm:ss</SessionStartTime>
Session End Time	<SessionEndTime>Day Mon-dd-yyyy hh:mm:ss</SessionEndTime>
Session Duration	<SessionDuration>duration</SessionDuration>
Session Delete Date	<SessionDeleteDate>Day Mon-dd-yyyy</SessionDeleteDate>
Select by Job Name	<Jobname>name</Jobname>
Select by Sys Name	<SysName>name</SysName>
Sample Interval	<SampleInterval>interval</SampleInterval>
Duration	<Duration>duration</Duration>
Sample File DSN	<SampleFileDSN>dsn</SampleFileDSN>
Samples Requested	<SamplesRequested>n</SamplesRequested>
Samples Done	<SamplesDone>n</SamplesDone>
ASID	<ASID>asid</ASID>
Job ID	<JobId>jobid</JobId>
Data Extractors	<Extractors>
	<Extractor>None</Extractor> if none selected
CICS	<Extractor>CICS</Extractor> omitted if not selected
CICS+	<Extractor>CICS+</Extractor> omitted if not selected
IMS	<Extractor>IMS</Extractor> omitted if not selected
IMS+	<Extractor>IMS+</Extractor> omitted if not selected
DB2	<Extractor>DB2</Extractor> omitted if not selected
DB2+	<Extractor>DB2+</Extractor> omitted if not selected
DB2 Variables	<Extractor>DB2V</Extractor> omitted if not selected
Static DB2 Explain	<Extractor>DB2X</Extractor> omitted if not selected
Collateral DB2	<Extractor>CDB2</Extractor> omitted if not selected
MQSeries	<Extractor>MQS</Extractor> omitted if not selected
MQ+	<Extractor>MQ+</Extractor> omitted if not selected
JAVA	<Extractor>JAVA</Extractor> omitted if not selected
ADA	<Extractor>ADA</Extractor> omitted if not selected
NAT	<Extractor>NAT</Extractor> omitted if not selected



Field title in online report	XML element
WAS	<Extractor>WAS</Extractor> omitted if not selected
SRB	<Extractor>SRB</Extractor> omitted if not selected
	</Extractors>

## Performance analysis reports

### S01 Measurement Profile

Field title in online report	XML element
Overall CPU Activity	<OverallCPUActivity>
Samples	<Samples>n</Samples>
	<SamplesPercent>n%</SamplesPercent>
Reports	<Reports>C01 C02 C03 C05 C07 W01 W02</Reports>
CPU Active	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
Wait	<Wait>n</Wait>
	<WaitPercent>n%</WaitPercent>
Queued	<Queued>n</Queued>
	<QueuedPercent>n%</QueuedPercent>
	</OverallCPUActivity>
CPU Usage Distribution	<CPUUsageDistribution>
CPU Active	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	<Reports>C01 C05 C08 W01</Reports>
Application	<Application>n</Application>
	<ApplicationPercent>n%</ApplicationPercent>
System	<System>n</System>
	<SystemPercent>n%</SystemPercent>
DB2 SQL	<DB2SQL>n</DB2SQL>
	<DB2SQLPercent>n%</DB2SQLPercent>
Data Mgmt	<DataMgt>n</DataMgt>
	<DataMgtPercent>n%</DataMgtPercent>
Unresolved	<Unresolved>n</Unresolved>
	<UnresolvedPercent>n%</UnresolvedPercent>
IMS DLI Call	<IMSDLICall>n</IMSDLICall>
	<IMSDLICallPercent>n%</IMSDLICallPercent>
	</CPUUsageDistribution>
Most CPU Active Modules	<MostCPUActiveModules>
CPU Active	<CPUActive>n</CPUActive>

Field title in online report	XML element
	<CPUActivePercent>n%</CPUActivePercent>
	<Reports>C02</Reports>
	<CPUActiveModules>
Module Name	<Module>name</Module>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</CPUActiveModules>
	</MostCPUActiveModules>
Most CPU Active CSECTS	<MostCPUActiveCSECTS>
Active CPU	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	<Reports>C02</Reports>
	<CPUActiveCSECTS>
CSECT in Module	<CSECT>csect in module</CSECT>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</CPUActiveCSECTS>
	</MostCPUActiveCSECTS>
CPU Modes	<CPUModes>
Active CPU	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
Reports	<Reports>S08</Reports>
Supv Mode	<SupvModeActive>n</SupvModeActive>
	<SupvModePercent>n%</SupvModePercent>
Prob Mode	<ProbModeActive>n</ProbModeActive>
	<ProbModePercent>n%</ProbModePercent>
In SVC	<InSVCActive>n</InSVCActive>
	<InSVCPercent>n%</InSVCPercent>
AMODE 24	<AMODE24Active>n</AMODE24Active>
	<AMODE24Percent>n%</AMODE24Percent>
AMODE 31	<AMODE31Active>n</AMODE31Active>
	<AMODE31Percent>n%</AMODE31Percent>
AMODE 64	<AMODE64Active>n</AMODE64Active>
	<AMODE64Percent>n%</AMODE64Percent>
User Key	<UserKeyActive>n</UserKeyActive>
	<UserKeyPercent>n%</UserKeyPercent>
System Key	<SystemKeyActive>n</SystemKeyActive>
	<SystemKeyPercent>n%</SystemKeyPercent>
	</CPUModes>

Field title in online report	XML element
Most Active DB2 Plans	<MostActiveDB2Plans>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F05</Reports>
	<Plans>
<i>Plan Name</i>	<PlanName>name</PlanName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</Plans>
	</MostActiveDB2Plans>
Most Active Package/DBRMs	<MostActivePackageDBRMs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F03</Reports>
	<DBRMs>
<i>DBRM Name</i>	<DBRM>name</DBRM>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</DBRMs>
	</MostActivePackageDBRMs>
Most Active SQL Statements	<MostActiveSQLStatements>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F04</Reports>
	<SQLStatement>
<i>Program:offset:verb</i>	<ProgramOffsetVerb>program:offset:verb</ProgramOffsetVerb>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostActiveSQLStatements>
Most Active IMS PSBs	<MostActiveIMSPSBs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I05 I08 I11</Reports>
	<ActiveIMSPSBs>
<i>PSB Name</i>	<PSBName>name</PSBName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSPSBs>

Field title in online report	XML element
	</MostActiveIMSPSBs>
Most Active IMS DLI Calls	<MostActiveIMSDLICalls>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I07 I10 I13</Reports>
	<ActiveIMSDLICalls>
Sequence Number:DLI Function Code:PCB Name	<IMSCall>imscall</IMSCall>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSDLICalls>
	</MostActiveIMSDLICalls>
Request Parameters	<RequestParameters>
Request Number	<RequestNumber>nmmn</RequestNumber>
Description	<Description>description</Description>
Sample file DSN	<SampleFileDSN>dsn</SampleFileDSN>
Retention	<Retention>Day Mon-dd-yyyy</Retention>
Data Extractors	<DataExtractors>extractor list</DataExtractors>
IMS Subsystem Id	<IMSSubsystemId>systemid</IMSSubsystemId>
IMS Tran Code	<IMSTransactionCode>transid</IMSTransactionCode>
IMS Program Name	<IMSProgramName>name</IMSProgramName>
IMS User Id	<IMSUserID>userid</IMSUserID>
Specific DB2 Parms	<SpecificDB2Parms>P   F</SpecificDB2Parms>
DB2 Subsystem	<DB2SubSystem>name</DB2SubSystem>
Schema	<Schema>name</Schema>
Name	<Name>name</Name>
Requesting user	<RequestingUser>userid</RequestingUser>
Nbr of samples	<NumberOfSamples>n</NumberOfSamples>
Time of request	<TimeOfRequest>hh:mm:ss</TimeOfRequest>
Duration	<Duration>n sec</Duration>
Date of request	<DateOfRequest>Day Mon-dd-yyyy</DateOfRequest>
Active/pending	<ActivePending>Status</ActivePending>
Job name	<JobName>name</JobName>
Proc step name	<ProcStepName>procstepname</ProcStepName>
Step name/number	<StepName>stepname</StepName>
Delay time	<DelayTime>n</DelayTime>
Step program	<StepProgram>steppgm</StepProgram>
	</RequestParameters>
Measurement environment	<MeasurementEnvironment>

Field title in online report	XML element
Job name	<JobName>name</JobName>
Region size <16MB	<RegionSizeBelow>nK</RegionSizeBelow>
Job number	<JobNumber>number</JobNumber>
Region size >16MB	<RegionSizeAbove>nK</RegionSizeAbove>
Step name	<StepName>stepname</StepName>
Step program	<StepProgram>steppgm</StepProgram>
Proc step name	<ProcStepName>procstepname</ProcStepName>
Region type	<RegionType>regiontype</RegionType>
ASID	<ASID>asid</ASID>
DB2 Attach type	<DB2AttachType>type</DB2AttachType>
System ID	<SystemID>sysid</SystemID>
APA Version	<APAVersion>version</APAVersion>
SMFID	<SMFID>smfid</SMFID>
IBM APA APAR	<APAApar>APAR</APAApar>
O/S level	<OSLevel>oslevel</OSLevel>
DB2 subsystem name	<DB2SubsystemName>db2sysname</DB2SubsystemName>
IMS system id	<IMSSystemId>imssysid</IMSSystemId>
General CPUs	<NbrOfCPUs>n</NbrOfCPUs>
CPU model	<CPUModel>model</CPUModel>
Specialty CPUs	<SpecialtyCPUs>n</SpecialtyCPUs>
CPU rate factor	<CPURateFactor>n</CPURateFactor>
MIPS per CPU	<MIPSPerCPU>n</MIPSPerCPU>
SUs per second	<SUsPerSecond>n</SUsPerSecond>
	</MeasurementEnvironment>
Measurement statistics	<MeasurementStatistics>
Start time	<StartTime>hh:mm:ss</StartTime>
Start date	<StartDate>Day Mon-dd-yyyy</StartDate>
End time	<EndTime>hh:mm:ss</EndTime>
End date	<EndDate>Day Mon-dd-yyyy</EndDate>
Total samples	<TotalSamples>n</TotalSamples>
Duration	<Duration>n min n sec</Duration>
Sampling rate	<SamplingRate>n per sec</SamplingRate>
Report dataspace	<ReportDataspace>nMB</ReportDataspace>
CPU/WAIT samples	<CPUWaitSamples>n</CPUWaitSamples>
Sample dataspace	<SampleDataspace>nMB</SampleDataspace>
TCB samples	<TCBSamples>n</TCBSamples>
Meas significance	<MeasurementSignificance>n%</MeasurementSignificance>
CPU queued samples	<CPUQueuedSamples>n</CPUQueuedSamples>
Pages in	<PagesIn>n</PagesIn>
Overall CPU	<OverallCPU>n%</OverallCPU>

Field title in online report	XML element
Pages out	<PagesOut>n</PagesOut>
Overall zAAP CPU	<OverallzAAPCPU>n%</OverallzAAPCPU>
EXCPs	<EXCPs>n</EXCPs>
Overall zIIP CPU	<OverallzIIPCPU>n%</OverallzIIPCPU>
	</MeasurementStatistics>
CPU consumption	<CPUConsumption>
CPU active samples	<CPUActiveSamples>n</CPUActiveSamples>
CPU time TCB	<CPUTimeTCB>n sec</CPUTimeTCB>
CPU active time	<CPUActiveTime>n%</CPUActiveTime>
CPU time SRB	<CPUTimeSRB>n sec</CPUTimeSRB>
CPU WAIT samples	<CPUWaitSamples>n</CPUWaitSamples>
Service Units	<ServiceUnits>n</ServiceUnits>
CPU WAIT time	<CPUWaitTime>n%</CPUWaitTime>
Measurement SRB	<MeasurementSRB>n sec</MeasurementSRB>
	<zAAPCPUConsumption>
zAAP CPU Time	< zAAPCPUTime>n sec< /zAAPCPUTime>
zAAP Time on CP	< zAAPTimeonCP >n sec</ zAAPTimeonCP >
Task Time on CP	< TaskTimeonCP>n sec</TaskTimeonCP>
Norm. Factor	< NormFactor>n</ NormFactor>
Normalized Time	< NormalizedTime>n sec</ NormalizedTime>
Enclave CPU time	<EnclaveCPUTime>n sec</EnclaveCPUTime>
	</zAAPCPUConsumption>
	</CPUConsumption>
DDF CPU consumption	<DDFCPUConsumption>
Task CPU time	<TaskCPUTime>n sec</TaskCPUTime>
zIIP time	<zIIPTime>n sec</zIIPTime>
Enclave CPU time	<EnclaveCPUTime>n sec</EnclaveCPUTime>
zIIP on CP time	<zIIPonCPTime>n sec</zIIPonCPTime>
	</DDFCPUConsumption>
	<ClientEnclaveConsumption>
Client SRB Time	<ClientSRBTime>n sec</ClientSRBTime>
Total TCB Time	<TotalTCBTime>n sec</TotalTCBTime>
	</ClientEnclaveConsumption>

## S02 Load Module Attributes

The table below lists all possible report tag pairs and their sub-elements hierarchically. When the XML document is created, the report tag pairs may be repeated, nested or eliminated as appropriate for the data in the report, and depending on the setup options chosen.

Field title in online report	XML element
	<LoadModuleAttributes>
Module Information for	<ModuleInformationFor>name</ModuleInformationFor>
Load Address	<LoadAddress>n to n</LoadAddress>
Module Size	<ModuleSize>n</ModuleSize>
Attributes	<Attributes>attributes</Attributes>
Module Location	<ModuleLocation>location</ModuleLocation>
SVC Module for	<SVCModuleFor>n</SVCModuleFor>
Loadlib DDNAME	<DDName>ddname</DDName>
Load Library	<LoadLibrary>dsn</LoadLibrary>
Program Group	<ProgramGroup>pgmgroup</ProgramGroup>
Subgroup	<SubGroup>subgroup</SubGroup>
Function	<Function>function</Function>
	<ESDInformationFor>
ESD Information for	<ModuleName<name>/ModuleName>
	<ESDInformation>
External	<External>external</External>
Offset	<Offset>n</Offset>
Length	<Length>n</Length>
Start Addr	<StartAddr>n</StartAddr>
End Addr	<EndAddr>n</EndAddr>
Entry Points	<EntryPointCompiler>
Compiled by	<CompilerLanguage>language</CompilerLanguage>
	<CompilerVersion>version</CompilerVersion>
at	<TimeStamp>yyyy/mm/dd hh:mm:ss</TimeStamp>
	<EntryPointOffset>
	<HexOffset>+n</HexOffset>
	<EntryPointName<name>/EntryPointName>
	</EntryPointOffset>
	</EntryPointCompiler>
	</ESDInformation>
	</ESDInformationFor>
	</LoadModuleAttributes>

## S03 Load Module Summary

The LoadModuleSummary tag pair and sub-elements are repeated for each module in the report.

Field title in online report	XML element
	<LoadModuleSummary>
Module	<ModuleName>name</ModuleName>

Field title in online report	XML element
Locn	<Location>location</Location>
Address	<Address>n</Address>
Count	<Count>n</Count>
Size(bytes)	<Size>n</Size>
Attributes	<Attributes>attributes</Attributes>
DDName	<DDName>ddname</DDName>
LoadLibrary	<DatasetName>dsn</DatasetName>
	</LoadModuleSummary>

## S04 TCB Summary

The TCBSummary tag pair and sub-elements are repeated for each task in the report. These tag pairs and sub-elements are also nested, with the ATTACHED subtasks relative to the parent tasks that performed the ATTACH function.

Field title in online report	XML element
	<TCBSummary>
TCB_Name	<TCBName>name-index</TCBName>
Address	<Address>n</Address>
Samples	<Samples>n</Samples>
CPU Active	<CPUActive>n%</CPUActive>
CPU WAIT	<CPUWait>n%</CPUWait>
Queued	<Queued>n%</Queued>
	</TCBSummary>

## S05 Memory Usage Timeline

The UsageTimeline tag pair and sub-elements are repeated for each time interval.

Field title in online report	XML element
	<UsageTimeline>
SEQN	<SequenceNumber>n</SequenceNumber>
Seconds	<Seconds>n</Seconds>
Storage	<Storage>nK</Storage>
	</UsageTimeline>

## S06 Data Space Usage Timeline

The UsageTimeline tag pair and sub-elements are repeated for each time interval.

Field title in online report	XML element
	<UsageTimeline>



Field title in online report	XML element
SEQN	<SequenceNumber>n</SequenceNumber>
Seconds	<Seconds>n</Seconds>
Storage	<Storage>nK</Storage>
	</UsageTimeline>

## S07 TCB Execution Summary

The TCBExecutionSummary tag pair and sub-elements are repeated for each task in the report. These tag pairs and sub-elements are also nested, with the ATTACHED subtasks relative to the parent tasks that performed the ATTACH function.

Field title in online report	XML element
	<TCBExecutionSummary>
TCB_Name	<TCBName>name-index</TCBName>
Seconds	<MeasuredCPU>n Sec</MeasuredCPU>
Storage	<TCBTotalCPU>n Sec</TCBTotalCPU>
	<FirstSample>n</FirstSample>
	<LastSample>n</LastSample>
	</TCBExecutionSummary>

## S08 Processor Utilization Summary

The ProcessorUtilizationSummary tag pair and sub-elements are repeated for each CPU state in the report.

Field title in online report	XML element
	<ProcessorUtilizationSummary>
Processor State	<ProcessorState>state</ProcessorState>
Nbr of Samples	<NumberOfSamples>n</NumberOfSamples>
Percentage	<Percentage>n%</Percentage>
	</ProcessorUtilizationSummary>

## S09 Measurement Analysis

The DetailLine element data is limited to 200 characters. When the details are greater than 200 characters, multiple DetailLine elements are included.

Field title in online report	XML element
	<MeasurementAnalysis>
	<Summary>summary</Summary>
	<Reports>list of reports</Reports>
	<AnalysisDetail>

Field title in online report	XML element
	<DetailLine>details</DetailLine>
	</AnalysisDetail>
	</MeasurementAnalysis>

## S10 Observation Session Messages

Table 21. S10 Observation Session Messages

Field title in online report	XML element
	<Sysout>
Name	<SysoutName>name</SysoutName>
Description	<SysoutDescription>description</SysoutDescription>
	<Message>
Name	<MessageId>Id</MessageId>
	<MessageSeverity>severity</MessageSeverity>
Description	<MessageDescription>description</MessageDescription>
	<MessageLines>
Description	<MessageText>text</MessageText>
	</MessageLines>
	</Message>
	</Sysout>

## C01 CPU Usage by Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Category>
Name	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber>n</SequenceNumber>

Field title in online report	XML element
Description	<FunctionPCBProgramOffset>FuncNameNameOffset</FunctionPCBProgramOffset>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DLICall>
	<File>
Name	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</File>
	<DMRequest>
Name	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command>n</Command>
Description	<CSECTOffset>offset</CSECTOffset>
	<Measurement>n</Measurement>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</ADABASCommand>

## C02 CPU Usage by Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<CSECT>
Name	<CSECTName>name</CSECTName>

Field title in online report	XML element
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	</LoadModule>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>

### C03 CPU Usage by Code Slice

The Code Slice tag pair and sub-elements are repeated for each code slice in the report.

Field title in online report	XML element
	<CodeSlice>
Address	<CodeSliceAddress>n</CodeSliceAddress>
Size Location	<SizeAndLocation>n loc+offset</SizeAndLocation>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<CodeAddress>
Address	<Address>address</Address>
Location	<Location>loc+offset</Location>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CodeAddress>
	</CodeSlice>

### C04 CPU Usage Timeline

The Interval tag pair and sub-elements are repeated for each interval reported.

Field title in online report	XML element
	<Interval>

Field title in online report	XML element
SEQN	<SequenceNumber>n</SequenceNumber>
Seconds	<Seconds>n</Seconds>
Sig	<Significance>n%</Significance>
	<Measurements>n</Measurements>
Percent of Interval * 10.00%	<Percent>n</Percent>
	</Interval>

## C05 CPU Usage by Task/Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=address</TCBAddress>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Task>
	<Category>
Name	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>

Field title in online report	XML element
	</LoadModule>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber>n</SequenceNumber>
Description	<FunctionPCBProgramOffset>FuncNameNameOffset</FunctionPCBProgramOffset>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DLICall>
	<File>
Name	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</File>
	<DMRequest>
Name	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command>n</Command>
Description	<CSECTOffset>offset</CSECTOffset>
	<Measurement>n</Measurement>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</ADABASCommand>

## C06 CPU Usage by Task/Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=n</TCBAddress>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Task>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>



Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>

## C07 CPU Usage by Procedure

Field title in online report	XML element
	<SourceProgramProcedure>
Program	<Program>name</Program>
Procedure Name	<ProcedureName>name</ProcedureName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SourceProgramProcedure>
	<Category>
Program	<CategoryName>name</CategoryName>
Procedure Name	<CategoryDescription>description</CategoryDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Category>

## C08 CPU Usage Referred Attribution

Field title in online report	XML element
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<CSECT>
Name	<CSECTName>name</CSECTName>

Field title in online report	XML element
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<AttributionOffset>
Name	<Offset>n</Offset>
Description	<OffsetInCSECT>Attribution Offset in name</OffsetInCSECT>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<SourceStatements>
Source Statement in:	<ProcedureName>n</ProcedureName>
	<SourceStatement>source</SourceStatement>
	</SourceStatements>
	</AttributionOffset>
	</CSECT>
	</LoadModule>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address </AddressRangeDescription>
	<Measurements>n </Measurements>
Percent of CPU Time * 10.00%	<Percent>n </Percent>
	</NoSymAddressRange>

## C09 CPU Usage by PSW/Object Code

Field title in online report	XML element
	<PSW Location>
Address	<Address>n</Address>
Module	<ModuleName>name</ModuleName>
AM	<AddressingMode>n</AddressingMode>
S/P	<SVCNumberorStateStorageKey>aa</SVCNumberorStateStorageKey>
AS	<AddressSpaceMode>mode</AddressSpaceMode>
ASID	<ASID>asid</ASID>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MachineInstruction>

Field title in online report	XML element
	<ModuleOffset>name+offset</ModuleOffset>
	<ObjectCode>object code</ObjectCode>
	<DisassembledCode>object code</DisassembledCode>
	</MachineInstruction>
	</PSWLocation>

## C10 CPU Usage by Natural Program

Field title in online report	XML element
	<NaturalProgram>
Program	<ProgramName>name</ProgramName>
Library	<Library>library</Library>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<NaturalStatement>
Program	<StatementNumberKey>n</StatementNumberKey>
Library	<StatementNumber>stmt # n</StatementNumber>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NaturalStatement>
	</NaturalProgram>

## W01 WAIT Time by Task/Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=n</TCBAddress>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</Task>
	<Category>
Name	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>

Field title in online report	XML element
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber>n</SequenceNumber>
Description	<FunctionPCBProgramOffset>FuncNameNameOffset</FunctionPCBProgramOffset>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</DLICall>
	<File>
Name	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</File>
	<DMRequest>
Name	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command>n</Command>
Description	<CSECTOffset>offset</CSECTOffset>
	<Measurement>n</Measurement>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</ADABASCommand>

## W02 WAIT Time by Task/Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>

Field title in online report	XML element
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=n</TCBAddress>
	<Measurements>n</Measurements>
Percent of TIME in WAIT * 10.00%	<Percent>n</Percent>
	</Task>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of TIME in WAIT * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of TIME in WAIT * 10.00%	<Percent>n</Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of TIME in WAIT * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>

### W03 WAIT Referred Attribution by Task

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=n</TCBAddress>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</Task>

Field title in online report	XML element
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	<AttributionOffset>
Name	<Offset>n</Offset>
Description	<OffsetInCSECT>Attribution Offset in csectname</OffsetInCSECT>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	<SourceStatements>
Source Statement in:	<ProcedureName>name</ProcedureName>
	<SourceStatement>source</SourceStatement>
	</SourceStatements>
	</AttributionOffset>
	</CSECT>
	</LoadModule>

## W04 WAIT Time by Task ENQ/RESERVE

Field title in online report	XML element
	<Task>
Name	<TaskName>name</TaskName>
Description	<TCBAddress>TCB=n</TCBAddress>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	<Enqueue>
Name	<QName>name</QName>
Description	<RName>name</RName>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</Enqueue>
	</Task>

## W05 WAIT Time by Tape DDNAME

Field title in online report	XML element
	<WaitForTape>
DDNAME	<DDName>ddname</DDName>
Device	<Device>description</Device>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</WaitForTape>

## D01 DASD Usage Time by Device

Field title in online report	XML element
	<ByVolser>
Volume>Cyl	<Volser>volser</Volser>
Unit-Dev>DD	<UnitDevice>unit-device</UnitDevice>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByCylinder>
Volume>Cyl	<Cylinder>Cyl_n</Cylinder>
Unit-Dev>DD	<DDName>ddname</DDName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByCylinder>
	</ByVolser>

## D02 DASD Usage Time by DDNAME

Field title in online report	XML element
	<ByDDName>
DDNAME>Cyl	<DDName>ddname</DDName>
Volume>Unit	<Volser>volser</Volser>



Field title in online report	XML element
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByCylinder>
DDNAME>Cyl	<Cylinder>Cyl_n</Cylinder>
Volume>Unit	<UnitDevice>unit-device</UnitDevice>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByCylinder>
	</ByDDName>

### D03 DASD Usage Time by Dataset

Field title in online report	XML element
	<ByDataset>
Dataset Name>DDName	<DatasetName>dsn</DatasetName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByDDName>
Dataset Name>DDName	<DDName>ddname</DDName>
	<Volser>volser</Volser>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByDDName>
	</ByDataset>

### D04 Dataset Attributes

Field title in online report	XML element
	<DatasetAttributes>
	<FileType>filetype</FileType>
	<DDName>ddname</DDName>
OPENed at	<OpenTime>hh:mm:ss</OpenTime>
	<OpenDate>Day Month dd yyyy</OpenDate>
	<FileDefinition>
DDNAME	<DDName>ddname</DDName>

Field title in online report	XML element
Open Intent	<OpenIntent>intent</OpenIntent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
Nbr of Extents	<NbrOfExtents>n</NbrOfExtents>
Dataset Org	<DatasetOrg>dsorg</DatasetOrg>
Block Size(BLKSIZE)	<BlockSize>n</BlockSize>
RECFM	<RecordFormat>rfm</RecordFormat>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Data Buffers	<DataBuffers>n</DataBuffers>
	<VOLSERS>
Volume Serial	<Volser>volser</Volser>
	</VOLSERS>
	</FileDefinition>
	<VSAMDataComponent>
DDNAME	<DDName>ddname</DDName>
Open Intent	<OpenIntent>intent</OpenIntent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
% Free Bytes in CI	<PercentFreeBytesInCI>n%</PercentFreeBytesInCI>
CI Splits (Initial)	<CISplitsInitial>n</CISplitsInitial>
CI Splits (Last)	<CISplitsLast>n</CISplitsLast>
CI Size	<CISize>n</CISize>
CA Splits (Initial)	<CASplitsInitial>n</CASplitsInitial>
CA Splits (Last)	<CASplitsLast>n</CASplitsLast>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Logical Records (Initial)	<RecordsInitial>n</RecordsInitial>
Logical Records (Last)	<RecordsLast>n</RecordsLast>
Number of Extents	<NbrOfExtents>n</NbrOfExtents>
Deleted Records (Initial)	<DeletedRecordsInitial>n</DeletedRecordsInitial>
Deleted Records (Last)	<DeletedRecordsLast>n</DeletedRecordsLast>
SHAREOPTIONS	<ShareOptions>(n n)</ShareOptions>
Insrted Records (Initial)	<InsertedRecordsInitial>n</InsertedRecordsInitial>
Insrted Records (Last)	<InsertedRecordsLast>n</InsertedRecordsLastl>
Organization	<Organization>org</Organization>

Field title in online report	XML element
Retrved Records (Initial)	<RetrievedRecordsInitial>n</RetrievedRecordsInitial>
Retrved Records (Last)	<RetrievedRecordsLast>n</RetrievedRecordsLast>
CIs per CA	<CIsPerCa>n</CIsPerCa>
Updated Records (Initial)	<UpdatedRecordsInitial>n</UpdatedRecordsInitial>
Updated Records (Last)	<UpdatedRecordsLast>n</UpdatedRecordsLast>
Free CIs per CA	<FreeCIsPerCa>n</FreeCIsPerCa>
Bytes Free Space (Initial)	<BytesFreeSpaceInitial>n</BytesFreeSpaceInitial>
Bytes Free Space (Last)	<BytesFreeSpaceLast>n</BytesFreeSpaceLast>
Free Bytes per CI	<FreeBytesPerCI>n</FreeBytesPerCI>
Number of EXCPs (Initial)	<NumberOfEXCPsInitial>n</NumberOfEXCPsInitial>
Number of EXCPs (Last)	<NumberOfEXCPsLast>n</NumberOfEXCPsLast>
% Free CIs in CA	<PercentFreeCisInCA>n%</PercentFreeCisInCA>
Strings	<Strings>n</Strings>
String Waits	<StringWaits>n</StringWaits>
String Waist HWM	<StringWaitsHWM>n</StringWaitsHWM>
Data Buffers	<DataBuffers>n</DataBuffers>
Index Buffers	<IndexBuffers>n</IndexBuffers>
	<VOLSER>
Volume Serial	<Volser>volser</Volser>
	</VOLSER>
	</VsamDataComponent>
	<VSAMIndexComponent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
% Free Bytes in CI	<PercentFreeBytesInCI>n%</PercentFreeBytesInCI>
CI Splits (Initial)	<CISplitsInitial>n</CISplitsInitial>
CI Splits (Last)	<CISplitsLast>n</CISplitsLast>
CI Size	<CISize>n</CISize>
CA Splits (Initial)	<CASplitsInitial>n</CASplitsInitial>
CA Splits (Last)	<CASplitsLast>n</CASplitsLast>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Logical Records (Initial)	<RecordsInitial>n</RecordsInitial>
Logical Records (Last)	<RecordsLast>n</RecordsLast>
Number of Extents	<NbrOfExtents>n</NbrOfExtents>

Field title in online report	XML element
Deleted Records (Initial)	<DeletedRecordsInitial>n</DeletedRecordsInitial>
Deleted Records (Last)	<DeletedRecordsLast>n</DeletedRecordsLast>
SHAREOPTIONS	<ShareOptions>(n n)</ShareOptions>
Insrted Records (Initial)	<InsertedRecordsInitial>n</InsertedRecordsInitial>
Insrted Records (Last)	<InsertedRecordsLast>n</InsertedRecordsLastl>
Organization	<Organization>org</Organization>
Retrvd Records (Initial)	<RetrievedRecordsInitial>n</RetrievedRecordsInitial>
Retrvd Records (Last)	<RetrievedRecordsLast>n</RetrievedRecordsLast>
CIs per CA	<CIsPerCa>n</CIsPerCa>
Updated Records (Initial)	<UpdatedRecordsInitial>n<UpdatedRecordsInitial>
Updated Records (Last)	<UpdatedRecordsLast>n<UpdatedRecordsLast>
Free CIs per CA	<FreeCIsPerCa>n</FreeCIsPerCa>
Bytes Free Space (Initial)	<BytesFreeSpaceInitial>n</BytesFreeSpaceInitial>
Bytes Free Space (Last)	<BytesFreeSpaceLast>n</BytesFreeSpaceLast>
Free Bytes per CI	<FreeBytesPerCI>n </FreeBytesPerCI>
Number of EXCPs (Initial)	<NumberOfEXCPsInitial>n</NumberOfEXCPsInitial>
Number of EXCPs (Last)	<NumberOfEXCPsLast>n</NumberOfEXCPsLast>
% Free CIs in CA	<PercentFreeCisInCA>n%</PercentFreeCisInCA>
	<VOLSEERS>
Volume Serial	<Volser>volser</Volser>
	</VOLSEERS>
	</VsamIndexComponent>
	<DasdPerformance>
Avg Response Time	<AvgResponseTime>n</AvgResponseTime>
Avg Pending Time	<AvgPendingTime>n</AvgPendingTime>
Avg Disconnect Time	<AvgDisconnectTime>n</AvgDisconnectTime>
Avg Connect Time	<AvgConnectTime>n</AvgConnectTime>
Avg Queued Time	<AvgQueuedTime>n</AvgQueuedTime>
Total I/Os	<TotalIOs>n</TotalIOs>
Cache Candidates	<CacheCandidates>n</CacheCandidates>
Cache Hits	<CacheHits>n</CacheHits>
Write Candidates	<WriteCandidates>n</WriteCandidates>
Write Hits	<WriteHits>n</WriteHits>
	</DasdPerformance>
Concatenated Datasets	<ConcatenatedDatasets>
	<DSName>dsn</DSName> Repeated as necessary
	</ConcatenatedDatasets>

Field title in online report	XML element
	</DatasetAttributes>

## D05 DASD EXCP Summary

Field title in online report	XML element
	<DASDEXCPSummary>
DDNAME	<DDName>ddname</DDName>
Type	<Type>type</Type>
Concat	<ConcatenationNumber>n</ConcatenationNumber>
At Start	<StartEXCPs>n</StartEXCPs>
At End	<EndEXCPs>n</EndEXCPs>
During Measurement	<DifferenceEXCPs>n</DifferenceEXCPs>
	</DASDEXCPSummary>

## D06 DASD VSAM Statistics

Field title in online report	XML element
	<VSAMStatistics>
DDNAME	<DDName>ddname</DDName>
Retrvd	<RecordsRetrieved>n</RecordsRetrieved>
Added	<RecordsAdded>n</RecordsAdded>
Insrted	<RecordsInserted>n</RecordsInserted>
Deletd	<RecordsDeleted>n</RecordsDeleted>
Updatd	<RecordsUpdated>n</RecordsUpdated>
EXCPs	<EXCPs>n</EXCPs>
FreeSpc	<ChangeFreeSpace>n</ChangeFreeSpace>
CISplts	<ChangeCISplits>n</ChangeCISplits>
CASplts	<ChangeCASplits>n</ChangeCASplits>
Str Wt	<StringWaits>n</StringWaits>
StrHWM	<StringWaitsHWM>n</StringWaitsHWM> >
	</VSAMStatistics>

## D07 DASD Activity Timeline

Field title in online report	XML element
	<DASDActivityTimeline>
	<Samples>n</Samples>
	<Duration>n</Duration>
DDN	<DDN>ddname</DDN>

Field title in online report	XML element
Type	<Type>type</Type>
Vol	<Vol>volser</Vol>
Unit	<Unit>unit</Unit>
	<Intervals>
	<IntervalPct>n</IntervalPct> Repeated 50 times
	</Interval>
	</DASDActivityTimeline>

## D08 DASD I/O Wait Time

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<ByDDName>
Name	<DDName>ddname</DDName>
Description	<Volser>volser</Volser>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>
	<DMRequest>
Name	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</LoadModule>

Field title in online report	XML element
	<CSECT>
Name	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	</ByDDName>

## D09 VSAM Buffer Pool Usage

Field title in online report	XML element
	<LSRPool>
LSR Pool	<PoolNumber>n</PoolNumber>
Type (Data/Index)	<Type>type</Type>
Reads (Initial)	<ReadsInitial>n</ReadsInitial>
Reads (Last)	<ReadsLast>n</ReadsLast>
Reads (Difference)	<ReadsDifference>n</ReadsDifference>
Buffer Size	<BufferSize>n</BufferSize>
Reads Avoided (Initial)	<ReadsAvoidedInitial>n</ReadsAvoidedInitial>
Reads Avoided (Last)	<ReadsAvoidedLast>n</ReadsAvoidedLast>
Reads Avoided (Difference)	<ReadsAvoidedDifference>n</ReadsAvoidedDifference>
Buffers	<Buffers>n</Buffers>
User Writes (Initial)	<UserWritesInitial>n</UserWritesInitial>
User Writes (Last)	<UserWritesLast>n</UserWritesLast>
User Writes (Difference)	<UserWritesDifference>n</UserWritesDifference>
Hiperspace Buffers	<HiperspaceBuffers>n</HiperspaceBuffers>
Non-user Writes (Initial)	<NonUserWritesInitial>n</NonUserWritesInitial>
Non-user Writes (Last)	<NonUserWritesLast>n</NonUserWritesLast>
Non-user Writes (Difference)	<NonUserWritesDifference>n</NonUserWritesDifference>
	</LSRPool>

## G01 Coupling Facility Statistics

Field title in online report	XML element
	<CouplingFacilityStatistics>
Facility Summary	<CFName>name</CFName>
CF Storage	<CFStorage>nK</CFStorage>

Field title in online report	XML element
CF Storage Used	<CFStorageUsed>nK</CFStorageUsed>
CF Dump Storage	<CFDumpStorage>nK</CFDumpStorage>
CF Storage for Structures	<CFStorageForStructures>nK</CFStorageForStructures>
Subchannel Contention Count	<SubchannelContentionCount>n</SubchannelContentionCount>
Subchannel Contention Time uSec	<SubchannelContentionCountuSec>n</SubchannelContentionCountuSec>
Failed Request Count	<FailedRequestCount>n</FailedRequestCount>
Failed Request Time uSec	<FailedRequestTimeuSec>n</FailedRequestTimeuSec>
Number of Processors	<NumberOfProcessors>n</NumberOfProcessors>
Processor Utilization	<ProcessorUtilization>n%</ProcessorUtilization>
	</CouplingFacilityStatistics>

## G02 Coupling Facility Mean Service Times

Field title in online report	XML element
	<CouplingFacilityServiceTimes>
Name	<CFName>name</CFName> or <StructureName>name</StructureName>
Number of Requests (Sync)	<RequestsSync>n</RequestsSync>
Number of Requests (Async)	<RequestsAsynch>n</RequestsAsynch>
Number of Requests (Queued)	<RequestsQueued>n</RequestsQueued>
Number of Requests (Delay)	<RequestsDelay>n</RequestsDelay>
Mean uSeconds (Sync)	<SecondsSync>n</SecondsSync>
Mean uSeconds (Async)	<SecondsAsynch>n</SecondsAsynch>
Mean uSeconds (Queued)	<SecondsQueued>n</SecondsQueued>
Mean uSeconds (Delay)	<SecondsDelay>n</SecondsDelay>
	</CouplingFacilityServiceTimes>

## G03 Coupling Facility Total Service Times

Field title in online report	XML element
	<CouplingFacilityServiceTimes>
Name	<CFName>name</CFName> or <StructureName>name</StructureName>



Field title in online report	XML element
Number of Requests (Sync)	<RequestsSync>n</RequestsSync>
Number of Requests (Async)	<RequestsAsynch>n</RequestsAsynch>
Number of Requests (Queued)	<RequestsQueued>n</RequestsQueued>
Number of Requests (Delay)	<RequestsDelay>n</RequestsDelay>
Total uSeconds (Sync)	<SecondsSync>n</SecondsSync>
Total uSeconds (Async)	<SecondsAsynch>n</SecondsAsynch>
Total uSeconds (Queued)	<SecondsQueued>n</SecondsQueued>
Total uSeconds (Delay)	<SecondsDelay>n</SecondsDelay>
	</CouplingFacilityServiceTimes>

## K01 CPU SRB Usage by SRB Type

The following elements might be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CPUSRBUUsageBySRBType>
Name	<Name>name</Name>
Description	<Description>description</Description>
zIIP	<zIIPPercent>n</zIIPPercent>
zAAP	<zAAPPercent>n</zAAPPercent>
GPU	<CPUPercent>n</CPUPercent>
Total	<TotalPercent>n</TotalPercent>
	</CPUSRBUUsageBySRBType>

## K02 CPU SRB Usage by PSW/OBbjCode

Field title in online report	XML element
	<PSWLocation>
Address	<Address>n</Address>
Module	<ModuleName>name</ModuleName>
AM	<AddressingMode>n</AddressingMode>
S/P	<SVCNumberorStateStorageKey>aa</SVCNumberorStateStorageKey>
AS	<AddressSpaceMode>mode</AddressSpaceMode>
ASID	<ASID>asid</ASID>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent	<Percent> <i>n</i> </Percent>
	<MachineInstruction>
Address	<ModuleOffset> <i>offset</i> </ModuleOffset>
	<ObjectCode> <i>object code</i> </ObjectCode>
	<DisassembledCode> <i>object code</i> </DisassembledCode>
	</MachineInstruction>
	</PSWLocation>

## V01 Measurement Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <CPUTimeTCBVariance></CPUTimeTCBVariance>
- <CPUTimeSRBVariance></CPUTimeSRBVariance>
- <EXCPRequestsVariance></EXCPRequestsVariance>
- <ServiceUnitsVariance></ServiceUnitsVariance>
- <CPUActiveSamplesVariance></CPUActiveSamplesVariance>
- <WaitSamplesVariance></WaitSamplesVariance>
- <QueuedSamplesVariance></QueuedSamplesVariance>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref> <i>n</i> </Ref>
ReqNum	<ReqNum> <i>n</i> </ReqNum>
Job Name	<JobName> <i>name</i> </JobName>
Date	<Date> <i>Mon-dd-yyyy</i> </Date>
Time	<Time> <i>hh:mm</i> </Time>
Description	<Description> <i>description</i> </Description>
	</MeasurementsAnalyzed>
CPU Time TCB	<CPUTimeTCBVariance>
Ref	<Ref> <i>n</i> </Ref>
CPU Time TCB	<CPUTimeTCB> <i>n sec</i> </CPUTimeTCB>
Variance	<Variance> <i>variance</i> </Variance>
	</CPUTimeTCBVariance>
CPU Time SRB	<CPUTimeSRBVariance>
Ref	<Ref> <i>n</i> </Ref>
CPU Time SRB	<CPUTimeSRB> <i>n sec</i> </CPUTimeSRB>
Variance	<Variance> <i>variance</i> </Variance>

Field title in online report	XML element
	</CPUTimeSRBVariance>
EXCP Requests	<EXCPRequestsVariance>
Ref	<Ref>n</Ref>
EXCP Requests	<EXCPRequests>n</EXCPRequests>
Variance	<Variance>variance</Variance>
	</EXCPRequestsVariance>
Service Units	<ServiceUnitsVariance>
Ref	<Ref>n</Ref>
Service Units	<ServiceUnits>n</ServiceUnits>
Variance	<Variance>variance</Variance>
	</ServiceUnitsVariance>
Percentage of CPU Active Samples	<CPUActiveSamplesVariance>
Ref	<Ref>n</Ref>
Sample Count (CPU Active)	<CPUActive>n</CPUActive>
Sample Count (Total)	<Total>n</Total>
Percentage	<Percentage>n%</Percentage>
Variance	<Variance>variance</Variance>
	</CPUActiveSamplesVariance>
Percentage of WAIT Samples	<WaitSamplesVariance>
Ref	<Ref>n</Ref>
Sample Count (TCB Wait)	<TCBWait>n</TCBWait>
Sample Count (Total)	<Total>n</Total>
Percentage	<Percentage>n%</Percentage>
Variance	<Variance>variance</Variance>
	</WaitSamplesVariance>
Percentage of Queued Samples	<QueuedSamplesVariance>
Ref	<Ref>n</Ref>
Sample Count (Queued)	<Queued>n</Queued>
Sample Count (Total)	<Total>n</Total>
Percentage	<Percentage>n%</Percentage>
Variance	<Variance>variance</Variance>
	</QueuedSamplesVariance>

## V02 CICS Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <CICSTransactionVariance></CICSTransactionVariance>
- <CICSCPUTimeVariance></CICSCPUTimeVariance>
- <CICSSuspendTimeVariance></CICSSuspendTimeVariance>
- <CICSDispatchTimeVariance></CICSDispatchTimeVariance>
- <CICSMVSDispatchTimeVariance></CICSMVSDispatchTimeVariance>
- <CICSServiceTimeVariance></CICSServiceTimeVariance>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref>n</Ref>
ReqNum	<ReqNum>n</ReqNum>
Job Name	<JobName>name</JobName>
Date	<Date>Mon-dd-yyyy</Date>
Time	<Time>hh:mm</Time>
Description	<Description>description</Description>
	</MeasurementsAnalyzed>
CICS Transaction Statistics	<CICSTransactionVariance>
Ref	<Ref>n</Ref>
Task Number Start	<TaskStart>n</TaskStart>
Task Number End	<TaskEnd>n</TaskEnd>
Transaction Count	<TranCount>n</TranCount>
Transaction Obsvd	<TranObserved>n</TranObserved>
Rate	<TranRate>n per sec</TranRate>
Variance	<Variance>variance</Variance>
	</CICSTransactionVariance>
Mean Execution Time	<CICSCPUTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanCPUTime>n sec</MeanCPUTime>
Variance	<Variance>variance</Variance>
	</CICSCPUTimeVariance>
Mean Suspend Time	<CICSSuspendTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanSuspendTime>n sec</MeanSuspendTime>
Variance	<Variance>variance</Variance>
	</CICSSuspendTimeVariance>
Mean CICS Dispatch Delay Time	<CICSDispatchTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanDispatchTime>n sec</MeanDispatchTime>

Field title in online report	XML element
Variance	<Variance>variance</Variance>
	</CICSDispatchTimeVariance>
Mean MVS Dispatch Delay Time	<CICSMVSDispatchTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanMVSDispatchTime>n sec</MeanMVSDispatchTime>
Variance	<Variance>variance</Variance>
	</CICSMVSDispatchTimeVariance>
Mean Service Time	<CICSServiceTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanServiceTime>n sec</MeanServiceTime>
Variance	<Variance>variance</Variance>
	</CICSServiceTimeVariance>

## V03 DB2 Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <DB2SQLVariance></DB2SQLVariance>
- <SQLObservations></SQLObservations>
- <SQLCallsExecuted></SQLCallsExecuted>
- <SQLCallRate></SQLCallRate>
- <SQLCallsCounted></SQLCallsCounted>
- <SQLThroughput></SQLThroughput>
- <SQLServiceTime></SQLServiceTime>
- <SQLCallMaxTime></SQLCallMaxTime>
- <SQLCallMinTime></SQLCallMinTime>
- <SQLCPUTime></SQLCPUTime>
- <SQLCallMaxCPUTime></SQLCallMaxCPUTime>
- <SQLCallMinCPUTime></SQLCallMinCPUTime>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref>n</Ref>
ReqNum	<ReqNum>n</ReqNum>
Job Name	<JobName>name</JobName>
Date	<Date>Mon-dd-yyyy</Date>
Time	<Time>hh:mm</Time>
Description	<Description>description</Description>

Field title in online report	XML element
	</MeasurementsAnalyzed>
SQL calls sampled	<DB2SQLVariance>
Ref	<Ref>n</Ref>
Subsys	<Subsystem>name</Subsystem>
Version	<Version>version</Version>
Calls Sampled	<CallsSampled>n</CallsSampled>
Variance	<Variance>variance</Variance>
	</DB2SQLVariance>
SQL observations	<SQLObservations>
Ref	<Ref>n</Ref>
Count	<SQLCount>n</SQLCount>
Variance	<Variance>variance</Variance>
	</SQLObservations>
SQL calls executed	<SQLCallsExecuted>
Ref	<Ref>n</Ref>
Count	<SQLCount>n</SQLCount>
Variance	<Variance>variance</Variance>
	</SQLCallsExecuted>
Avg SQL call rate	<SQLCallRate>
Ref	<Ref>n</Ref>
Rate	<SQLRate>n per sec</SQLRate>
Variance	<Variance>variance</Variance>
	</SQLCallRate>
SQL calls counted	<SQLCallsCounted>
Ref	<Ref>n</Ref>
Count	<SQLCount>n</SQLCount>
Variance	<Variance>variance</Variance>
	</SQLCallsCounted>
SQL throughput	<SQLThroughput>
Ref	<Ref>n</Ref>
Rate	<SQLRate>n per sec</SQLRate>
Variance	<Variance>variance</Variance>
	</SQLThroughput>
SQL service time	<SQLServiceTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</SQLServiceTime>
SQL call max	<SQLCallMaxTime>
Ref	<Ref>n</Ref>

Field title in online report	XML element
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</SQLCallMaxTime>
SQL call min time	<SQLCallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</SQLCallMinTime>
SQL CPU time	<SQLCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCPUTime>
SQL call max CPU time	<SQLCallMaxCPUTime>
Ref	<Ref>n</Ref> >
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCallMaxCPUTime>
SQL call min CPU time	<SQLCallMinCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCallMinCPUTime>

## V04 IMS Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <TxnObservations></TxnObservations>
- <TxnsCounted></TxnsCounted>
- <TransactionRate></TransactionRate>
- <TxnThroughput></TxnThroughput>
- <TxnServiceTime></TxnServiceTime>
- <TxnCallMaxTime></TxnCallMaxTime>
- <TxnCallMinTime></TxnCallMinTime>
- <TxnCPUTime></TxnCPUTime>
- <TxnCallMaxCPUTime></TxnCallMaxCPUTime>
- <TxnCallMinCPUTime></TxnCallMinCPUTime>
- <DLIObservations></DLIObservations>
- <DLICallsCounted></DLICallsCounted>

- <DLICallRate></DLICallRate>
- <DLICallThroughput></DLICallThroughput>
- <DLICallServiceTime></DLICallServiceTime>
- <DLICallMaxTime></DLICallMaxTime>
- <DLICallMinTime></DLICallMinTime>
- <DLICallCPUTime></DLICallCPUTime>
- <DLICallMaxCPUTime></DLICallMaxCPUTime>
- <DLICallMinCPUTime></DLICallMinCPUTime>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref>n</Ref>
ReqNum	<ReqNum>n</ReqNum>
Job Name	<JobName>name</JobName>
Date	<Date>Mon-dd-yyyy</Date>
Time	<Time>hh:mm</Time>
Description	<Description>description</Description>
	</MeasurementsAnalyzed>
Txn observations	<TxnObservations>
Ref	<Ref>n</Ref>
IMS Subsys	<Subsystem>name</Subsystem>
IMS Version	<Version>version</Version>
Txns Sampled	<TxnsSampled>n</TxnsSampled>
Variance	<Variance>variance</Variance>
	</TxnObservations>
IMS Txns counted	<TxnsCounted>
Ref	<Ref>n</Ref>
Count	<TxnCount>n</TxnCount>
Variance	<Variance>variance</Variance>
	</TxnsCounted>
Transaction rate	<TransactionRate>
Ref	<Ref>n</Ref>
Rate	<TxnRate>n per sec</TxnRate>
Variance	<Variance>variance</Variance>
	</TransactionRate>
Txn throughput	<TxnThroughput>
Ref	<Ref>n</Ref>
Rate	<TxnRate>n per sec</TxnRate>
Variance	<Variance>variance</Variance>
	</TxnThroughput>
IMS Txn svc time	<TxnServiceTime>



Field title in online report	XML element
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnServiceTime>
IMS Txn max svc	<TxnCallMaxTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnCallMaxTime>
IMS Txn min svc	<TxnCallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnCallMinTime>
IMS Txn CPU time	<TxnCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCPUTime>
IMS Txn max CPU	<TxnCallMaxCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCallMaxCPUTime>
IMS Txn min CPU	<TxnCallMinCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCallMinCPUTime>
DLI observations	<DLIObservations>
Ref	<Ref>n</Ref>
Count	<CallsSampled>n</CallsSampled>
Variance	<Variance>variance</Variance>
	</DLIObservations>
DLI call count	<DLICallsCounted>
Ref	<Ref>n</Ref>
Count	<CallCount>n</CallCount>
Variance	<Variance>variance</Variance>
	</DLICallsCounted>
DLI call rate	<DLICallRate>

Field title in online report	XML element
Ref	<Ref>n</Ref>
Rate	<CallRate>n per sec</CallRate>
Variance	<Variance>variance</Variance>
	</DLICallRate>
DLI call thruput	<DLICallThroughput>
Ref	<Ref>n</Ref>
Rate	<CallRate>n per sec</CallRate>
Variance	<Variance>variance</Variance>
	</DLICallThroughput>
DLI svc time	<DLICallServiceTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallServiceTime>
DLI max svc	<DLICallMaxTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallMaxTime>
DLI min svc	<DLICallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallMinTime>
DLI CPU time	<DLICallCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</DLICallCPUTime>
DLI max CPU time	<DLICallMaxCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</DLICallMaxCPUTime>
DLI min CPU time	<DLICallMinCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</DLICallMinCPUTime>

## CICS Performance analysis reports

### E01 CICS Session Statistics

Field title in online report	XML element
	<CICSSummary>
CICS Release	<CICSRelease>CICS Release</CICSRelease>
First Transaction TaskId	<FirstTaskId>n</FirstTaskId>
Last Transaction TaskId	<LastTaskId>n</LastTaskId>
Number of TaskId Increments	<TaskIdIncrements>n</TaskIdIncrements>
Number of Observed Transactions	<ObservedTransactions>n</ObservedTransactions>
Transaction Rate (per sec)	<TransactionRate>n</TransactionRate>
Peak Active Txns (Observed)	<PeakActiveTransactionsObserved>n</PeakActiveTransactionsObserved>
Peak Active Txns (Overall)	<PeakActiveTransactionsOverall>n</PeakActiveTransactionsOverall>
Max Task <MaxTask>n</MaxTask>	Execution Time <ExecutionTime>n</ExecutionTime>
Suspend Time	<SuspendTime>n</SuspendTime>
CICS Dispatch Delay Time	<CICSDispatchDelayTime>n</CICSDispatchDelayTime>
MVS Dispatch Delay Time	<MVSDispatchDelayTime>n</MVSDispatchDelayTime>
Service Time	<ServiceTime>n</ServiceTime>
Program Requests	<ProgramRequests>n</ProgramRequests>
Terminal Messages	<TerminalMessages>n</TerminalMessages>
Storage Getmains	<StorageGetmains>n</StorageGetmains>
Storage Freemains	<StorageFreemains>n</StorageFreemains>
File I/O Requests	<FileIORequests>n</FileIORequests>
Temporary Storage Requests	<TemporaryStorageRequests>n</TemporaryStorageRequests>
Transient Data Requests	<TransientDataRequests>n</TransientDataRequests>
Journal Write Requests	<JournalWriteRequests>n</JournalWriteRequests>
System Dumps	<SystemDumps>n</SystemDumps>
System Dumps Suppressed	<SystemDumpsSuppressed>n</SystemDumpsSuppressed>
Transaction Dumps	<TransactionDumps>n</TransactionDumps>
Transaction Dumps Suppressed	<TransactionDumpsSuppressed>n</TransactionDumpsSuppressed>
Storage Violations	<StorageViolations>n</StorageViolations>
Short on Storage occurrences	<ShortOnStorageOccurrences>n</ShortOnStorageOccurrences>

Field title in online report	XML element
Times at MaxTask	<TimesAtMaxTask>n</TimesAtMaxTask>
Times at Class MaxTask	<TimesAtClassMaxTask>n</TimesAtClassMaxTask>
	<TransactionCounts>
TranId	<TransactionId>tranid</TransactionId>
Count	<TransactionCount>n</TransactionCount>
	</TransactionCounts>
	</CICSSummary>

## E02 CICS CPU and Use Counts by Pgm

Field title in online report	XML element
	<DetailLine>
Name	<Name>name</Name>
Calls	<Description>n</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DetailLine>

## E03 CICS CPU Usage by Transaction

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns/Description	<CICSTxnCount>n</CICSTxnCount>
	<Description>description</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
NTxns/Description	<Description>description</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSProgram>
	<CICSCommand>

Field title in online report	XML element
Name	<CSECT>name</CSECT>
NTxns/Description	<Offset>offset</Offset>
NTxns/Description	<Command>command</Command>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSCommand>
	<CICSService>
Name	<Program>name</Program>
NTxns/Description	<Description>description</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
NTxns/Description	<SQLVerb>verb</SQLVerb>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
NTxns/Description	<DLIRequest>dlirequest</DLIRequest>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
NTxns/Description	<Command>command</Command>
	<Measurement>n</Measurement>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</ADABASCommand>

## E04 CICS Mean Service Time by Txn

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>

Field title in online report	XML element
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<SQL>offset</SQL>
Description	<Description>sqlverb</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E05 CICS Total Service Time by Txn

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>



Field title in online report	XML element
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<SQL>offset</SQL>
Description	<Description>sqlverb</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E06 CICS Total Service Time by Task ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>

Field title in online report	XML element
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSTaskId>
Name	<TaskId>tasknumber</TaskId>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTaskId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>

Field title in online report	XML element
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E07 CICS Wait by Txn

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns/Description	<CICSTxnCount> <i>n</i> </CICSTxnCount>
	<Description></Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Wait Time * 10.00%	<Percent> <i>n</i> </Percent>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
NTxns/Description	<Description> <i>description</i> </Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Wait Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSWait>
	</CICSTranId>

## E08 CICS Mean Service Time by Termid

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId> <i>termid</i> </TerminalId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>

Field title in online report	XML element
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>

Field title in online report	XML element
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSCLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E09 CICS Total Service Time by Termid

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId>termid</TerminalId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTerminal>

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>

Field title in online report	XML element
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E10 CICS Mean Service Time by User ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSuserid>
Name	<userid>userid</userid>
NTxns	<CICSTxnCount>n</CICSTxnCount>



Field title in online report	XML element
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSUserid>
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>

Field title in online report	XML element
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E11 CICS Total Service Time by User ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSUserid>
Name	<Userid>userid</Userid>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSUserid>
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>

Field title in online report	XML element
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## E12 CICS CPU/Service Time by Transaction

Field title in online report	XML element
	<CPUTimeByTransaction>
Name	<Transaction>name</Transaction>
NTxns	<NumberOfTxns>n</NumberOfTxns>
% of CPU	<PctCPUTime>n%</PctCPUTime>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
	<CPUTimeByTransactionDetail>
Name	<TaskNumber>n</TaskNumber>
Description	<StartTime>hh.mm.ss.ss</StartTime>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
	</CPUTimeByTransactionDetail>
	</CPUTimeByTransaction>

## IMS Performance analysis reports

### I01 IMS Measurement Profile

Field title in online report	XML element
IMS Environment	<IMSEnvironment>
DFSRRRC00 parms	<DFSRRRC00Parms>parms</DFSRRRC00Parms>
IMS system id	<SystemId>systemid</SystemId>
IMS region name	<RegionName>name</RegionName>
IMS version	<Version>version</Version>
IMS region type	<RegionType>regiontype</RegionType>
	</IMSEnvironment>
Most Active IMS PSBs	<MostActiveIMSPSBs>

Field title in online report	XML element
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I05 I08 I11</Reports>
	<ActiveIMSPSBs>
	<PSBName>name</PSBName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSPSBs>
	</MostActiveIMSPSBs>
	</MostActiveIMSTransactions>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I04 I06 I09 I12</Reports>
	<ActiveIMSTransactions>
	<TransactionId>transid</TransactionId>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSTransactions>
	</MostActiveIMSTransactions>
	</MostActiveIMSDLICalls>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I07 I10 I13</Reports>
	<ActiveIMSDLICalls>
	<IMSCall>imscall</IMSCall>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSDLICalls>
	</MostActiveIMSDLICalls>
	</MostCPUConsumptiveDLI>
Total DLI CPU time	<CPUTime>n</CPUTime>
	<Percent>n%</Percent>
Reports	<Reports>I18 I19 I20 I21</Reports>
	<CPUConsumptiveDLI>
	<IMSCall>imscall</IMSCall>
	<CPUTime>n</CPUTime>
	<CPUTimePercent>n%</CPUTimePercent>
	</CPUConsumptiveDLI>

Field title in online report	XML element
	</MostCPUConsumptiveDLI>
Most Frequent Transactions	<MostFrequentTransactions>
Total txns counted	<Transactions>n</Transactions>
	<Percent>n%</Percent>
Reports	<Reports>I03 I04 I16 I17</Reports>
	<FrequentTransactions>
	<TransactionId>trandid</TransactionId>
	<TransactionsCounted>n</TransactionsCounted>
	<PercentOfTransactions>n%</PercentOfTransactions>
	</FrequentTransactions>
	</MostFrequentTransactions>
Most Frequent DL/I Calls	<MostFrequentDLICalls>
Total DLI call count	<Samples>n</Samples>
	<Percent>n%</Percent>
	Reports <Reports>I02 I17 I18</Reports>
	<FrequentDLICalls>
	<IMSCall>imscall</IMSCall>
	<Samples>n</Samples>
	<Percent>n%</Percent>
	</FrequentDLICalls>
	</MostFrequentDLICalls>
Transaction Statistics	<TransactionStatistics>
IMS Txns counted	<TransactionsCounted>n</TransactionsCounted>
Transaction rate	<TransactionRate>n per sec</TransactionRate>
Txn observations	<TransactionObservations>n</TransactionObservations>
Txn throughput	<TransactionThroughput>n per sec</TransactionThroughput>
IMS Txn svc time	<TransactionServiceTime>n sec</TransactionServiceTime>
IMS Txn CPU time	<TransactionCPUTime>n sec</TransactionCPUTime>
IMS txn max svc	<TransactionMaximumService>nssec</TransactionMaximumService>
IMS Txn max CPU	<TransactionMaximumCPU>n sec</TransactionMaximumCPU>
IMS Txn min svc	<TransactionMinimumService>n sec</TransactionMinimumService>
IMS Txn min CPU	<TransactionMinimumCPU>n sec</TransactionMinimumCPU>
	</TransactionStatistics>

## I02 IMS DL/I Call Timeline

The DLICallTimeline tag pair and sub-elements are repeated for each DLI call.

Field title in online report	XML element
	<DLICallTimeline>
CallSeq	<CallSeq>n</CallSeq>
Func	<Function>function</Function>
PCB Name	<PCBName>name</PCBName>
Id	<Id>n</Id>
Location	<Location>location</Location>
Stat	<Status>status</Status>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Duration	<Duration>n</Duration>
	</DLICallTimeline>

## I03 IMS Transaction Timeline

The IMSTransactionTimeLine tag pair and sub-elements are repeated for each IMS transaction.

Field title in online report	XML element
	<IMSTransactionTimeLine>
TranCode	<TransactionCode>tranid</TransactionCode>
PSB/PCB	<PSBName>name</PSBName>
Location	<LTERM>lterm</LTERM>
Txn Time	<TransactionTime>hh:mm:ss.ss</TransactionTime>
Duration	<Duration>n</Duration>
	<DLICallTimeLine>
TranCode	<CallSeq>n</CallSeq>
PSB/PCB	<PCBName>name</PCBName>
Id	<Id>n</Id> Func
	<Function>function</Function>
Location	<Location>location</Location>
Stat	<Status>status</Status>
Txn Time	<CallTime>hh:mm:ss.ss</CallTime>
Duration	<Duration>n</Duration>
	</DLICallTimeline>
	</IMSTransactionTimeLine>



## I04 IMS Transaction Activity Timeline

Field title in online report	XML element
	<IMSTransactionActivityTimeLine>
TranCode	<Samples>n</Samples>
PSB/PCB	<Duration>n</Duration>
Location	<Txn>tranid</Txn>
Txn Time	<TransactionTime>hh:mm:ss</TransactionTime>
Duration	<PSB>name</PSB>
	<Txns>n</Txns>
	<Intervals>
	<IntervalCount>n</IntervalCount> Repeated 50 times
	</Interval>
	</IMSTransactionActivityTimeLine>

## I05 to I13

This section describes the common tag pairs and elements of the XML detail lines shared by reports I05 through I13. The same information is categorized and displayed differently in each report. The report names covered by the following XML are:

- I05 IMS CPU Usage by PSB
- I06 IMS CPU Usage by Txn
- I07 IMS CPU Usage by DL/I Call
- I08 IMS WAIT Time by PSB
- I09 IMS WAIT Time by Txn
- I10 IMS WAIT Time by DL/I Call
- I11 IMS DL/I Activity by PSB
- I12 IMS DL/I Activity by Txn
- I13 IMS DL/I Activity by DL/I Call

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Category>
Name	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription >
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</Category>
	<CSECT>
Name	<CSECTName>name</CSECTName>

Field title in online report	XML element
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<DLICall>
Name	<SequenceNumber>n</SequenceNumber>
Description	<FunctionPCBProgramOffset>FuncNameNameOffset</FunctionPCBProgramOffset>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</DLICall>
	<DMRequest>
Name	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<DPAGroup>
Name	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<File>
Name	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>
Percent of xxxTime * 10.00%	<Percent>n</Percent>
	</File>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<NoSymAddressRange>

Field title in online report	XML element
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<PSB>
Name	<PSBName>name</PSBName>
Description	<Description>description</Description>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</PSB>
	<SQLRequest>
Name	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<SVCRoutine>
Name	<SVCId>svcid</SVCId>
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>

## I14 IMS PSB/PCB Attributes

Field title in online report	XML element
	<IMSPSBAttributes>
PSB name	<PSBName>name</PSBName>
IMS system	<IMSSystem>imssystem</IMSSystem>
No.of PCBs	<NumberOfPCBs>n</NumberOfPCBs>
LIST=NO PCBs	<LISTNOPCBs>n</LISTNOPCBs>
Txn count	<TransactionCount>n</TransactionCount>
DL/I calls	<DLICalls>n</DLICalls>
Sample count	<SampleCount>n</SampleCount>

Field title in online report	XML element
	<IMSPCBs>
PCBNum	<PCBNumber>n</PCBNumber>
Name	<PCBName>name</PCBName>
Type	<PCBType>type</PCBType>
DBD/LTRM	<DBDLterm>name</DBDLterm>
PROCOPT	<PROCOPT>procopt</PROCOPT>
LIST	<List>yesno</List>
	</IMSPCBs>
	</IMSPSBAttributes>

## I15 IMS DL/I Call Attributes

Field title in online report	XML element
	<DLICallAttributes>
DL/I Call Id	<DLICallId>n</DLICallId>
Function code	<FunctionCode>code</FunctionCode>
PSB Name	<PSBName>name</PSBName>
PCB Naame	<PCBName>name</PCBName>
IMS Id-Region	<IMSIdRegion>imsid-region</IMSIdRegion>
PCB Number	<PCBNumber>n</PCBNumber>
Call type	<CallType>calltype</CallType>
CSECT/module	<CSECTModule>csect in module</CSECTModule>
Offset of call	<OffsetOfCall>n</OffsetOfCall>
Sample count	<SampleCount>n</SampleCount>
Call count	<CallCount>n</CallCount>
DLI CPU time	<DLICPUTime>n</DLICPUTime>
Service time	<ServiceTime>n</ServiceTime>
	<DLICall>
SSA/FSA	<SSANum>n</SSANum>
	<SSA>ssa</SSA>
	</DLICall>
	</DLICallAttributes>

## I16 IMS Transaction Service Times

Field title in online report	XML element
	<IMSTransactionServiceTimes>
TranCode	<TransactionCode>transid</TransactionCode>
PSB/PGM	<PSBProgram>name</PSBProgram>

Field title in online report	XML element
Txns	<TransactionCount>n</TransactionCount>
Fetch	<FetchCount>n</FetchCount>
Sched	<ScheduleCount>n</ScheduleCount>
Total time	<TotalTime>n</TotalTime>
Avg/Txn	<AverageTimePerTransaction>n</AverageTimePerTransaction>
CPU Time	<CPUTime>n</CPUTime>
	</IMSTransactionServiceTimes>

## I17 IMS Transaction DL/I Call Counts

Field title in online report	XML element
	<IMSTransactionDLICallCounts>
Tran/PCB	<TransactionCode>tranid</TransactionCode>
PSB/DBD	<PSBname>name</PSBname>
Total	<DLITotalCount>n</DLITotalCount>
Minimum	<DLIMinimumCount>n</DLIMinimumCount>
Maximum	<DLIMaximumCount>n</DLIMaximumCount>
Average	<DLIAverageCount>n</DLIAverageCount>
	<IMSTransactionDLICallCountsByPCB>
Tran/PCB	<PCBName>name</PCBName>
PSB/DBD	<DBDName>name</DBDName>
PCBNum	<PCBNumber>n</PCBNumber>
Func	<Function>function</Function>
Total	<DLITotalCount>n</DLITotalCount>
Minimum	<DLIMinimumCount>n</DLIMinimumCount>
Maximum	<DLIMaximumCount>n</DLIMaximumCount>
Average	<DLIAverageCount>n</DLIAverageCount>
	</IMSTransactionDLICallCountsByPCB>
	</IMSTransactionServiceTimes>

## I18 IMS CPU/Service Time by DL/I Call

Field title in online report	XML element
	<IMSCPUTimeByCall>
Call	<CallNumber>n</CallNumber>
Func	<Function>function</Function>
PCB Name	<PCBName>name</PCBName>
Location	<Location>location</Location>
Count	<CallCount>n</CallCount>

Field title in online report	XML element
Svc time	<DLIServiceTime>n</DLIServiceTime>
Prcnt	<DLIServicePercent>n%</DLIServicePercent>
CPU Time	<DLICPUTime>n</DLICPUTime>
Prcnt	<DLICPUPercent>n%</DLICPUPercent>
	</IMSCPUTimeByCall>

## I19 IMS CPU/Service Time by PSB

Field title in online report	XML element
	<IMSCPUTimeByPSB>
PSB Name	<PSBName>name</PSBName>
Txn Count	<TransactionCount>n</TransactionCount>
DL/I Count	<CallCount>n</CallCount>
Svc time	<DLIServiceTime>n</DLIServiceTime>
Prcnt	<DLIServicePercent>n%</DLIServicePercent>
CPU Time	<DLICPUTime>n</DLICPUTime>
Prcnt	<DLICPUPercent>n%</DLICPUPercent>
	</IMSCPUTimeByPSB>

## I20 IMS CPU/Service Time by Transaction

Field title in online report	XML element
	<IMSCPUTimeByTransaction>
TranCode	<TransactionCode>tranid</TransactionCode>
Txn Count	<TransactionCount>n</TransactionCount>
Service	<TransactionServiceTime>n</TransactionServiceTime>
CPU Time	<TransactionCPUTime>n</TransactionCPUTime>
Svc time	<DLIServiceTime>n</DLIServiceTime>
%of Txn	<DLIServicePercent>n%</DLIServicePercent>
CPU Time	<DLICPUTime>n</DLICPUTime>
%of Txn	<DLICPUPercent>n%</DLICPUPercent>
	</IMSCPUTimeByTransaction>

## I21 IMS CPU/Service Time by PCB

Field title in online report	XML element
	<IMSCPUTimeByPCB>
PSB Name	<PSBName>name</PSBName>
PCB Name	<PCBName>name</PCBName>

Field title in online report	XML element
PCB Num	<PCBNumber>n</PCBNumber>
Count	<CallCount>n</CallCount>
Svc time	<DLIServiceTime>n</DLIServiceTime>
Percent	<DLIServicePercent>n%</DLIServicePercent>
CPU Time	<DLICPUTime>n</DLICPUTime>
Percent	<DLICPUPercent>n%</DLICPUPercent>
	</IMSCPUTimeByPCB>

## I22 IMS Region Transaction Summary

The IMSRegionTxns tag pair is repeated for each measured IMS transaction. The last tag pair represents the total for all lines of the report.

Field title in online report	XML element
	<IMSRegionTxns>
TranCode	<TranCode>name</TranCode>
PSB Name	<PSBName>name</PSBName>
Txn count	<TxnCount>n</TxnCount>
Svc/Trn	<SvcPerTrn>n</SvcPerTrn>
CPU/Trn	<CpuPerTrn>n</CpuPerTrn>
DLI/Trn	<DLIPerTrn>n</DLIPerTrn>
SQL/Trn	<SQLPerTrn>n</SQLPerTrn>
MQ/Trn	<MQIPerTrn>n</MQIPerTrn>
	</IMSRegionTxns>

## DB2 Performance analysis reports

### F01 DB2 Measurement profile

Field title in online report	XML element
Most Active DB2 Plans	<MostActiveDB2Plans>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F05</Reports>
	<Plans>
	<PlanName>name</Planname>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</Plans>
	</MostActiveDB2Plans>

Field title in online report	XML element
Most Active Package/DBRM	<MostActiveDBRMs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F03</Reports>
	<DBRMs>
	<DBRM>name</DBRM>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</DBRMs>
	</MostActiveDBRMs>
Most Active SQL Statements	<MostActiveSQL>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F04</Reports>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostActiveSQL>
Most CPU consumptive SQL	<MostCPUConsumptiveSQL>
Total SQL CPU time	<CPUTime>n</CPUTime>
	<Percent>n%</Percent>
Reports	<Reports>F10 F11 F12</Reports>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostCPUConsumptiveSQL>
Most Frequent SQL Statements	<MostFrequentSQL>
Total SQL call count	<Samples>n</Samples>
	<Percent>n%</Percent>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>



Field title in online report	XML element
	</SQLStatement>
	</MostFrequentSQL>
Single SQL Call Service Time	<SingleSQLCallServiceTime>
Total SQL service count	<Samples>n</Samples>
	<Percent>n%</Percent>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</SingleSQLCallServiceTime>
Db2 Measurement Statistics	<DB2MeasurementStatistics>
DB2 subsystem name	<SubsystemName>name</SubsystemName>
DB2 version	<Version>version</Version>
SQL calls sampled	<CallsSampled>n</CallsSampled>
SQL observations	<SQLObservations>n</SQLObservations>
SQL calls executed	<CallsExecuted>n</CallsExecuted>
Avg SQL call rate	<CallRate>n per sec</CallRate>
SQL calls counted	<CallsCounted>n</CallsCounted>
SQL throughput	<SQLThroughput>n per sec</SQLThroughput>
SQL service time	<ServiceTime>n sec</ServiceTime>
SQL CPU time	<CPUTime>n sec</CPUTime>
CQL call max time	<CallMaxTime>n sec</CallMaxTime>
SQL call max CPU	<CallMaxCPU>n sec</CallMaxCPU>
SQL call min time	<CallMinTime>n sec</CallMinTime>
SQL call min CPU	<CallMinCPU>n sec</CallMinCPU>
	</DB2MeasurementStatistics>

## F02 DB2 SQL Activity Timeline

The SQLActivityTimeline tag pair and sub-elements are repeated for each SQL call.

Field title in online report	XML element
	<SQLActivityTimeline>
Thread	<Thread>n</Thread>
REQCT	<REQCT>n</REQCT>
Program	<Program>name</Program>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>

Field title in online report	XML element
Samps	<Samples>n</Samples>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Interval	<Interval>n</Interval>
CPU Time	<CPUTime>n</CPUTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLActivityTimeline>

### F03 SQL Activity by DBRM

Field title in online report	XML element
	<DetailLine>
Name	<Name>name</Name>
	<Description></Description>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n %</Percent>
	<SQLRequest>
Name	<SequenceNumber>seqno</SequenceNumber>
Stmt# SQL Function	<ProgramStatementFunction>stmt function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>

Field title in online report	XML element
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

## F04 SQL Activity by Statement

Field title in online report	XML element
	<SQLRequest>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Program Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>

## F05 SQL Activity by Plan

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Plan/Pgm	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n %</Percent>
	<SQLRequest>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>

Field title in online report	XML element
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

## F06 DB2 SQL Statement Attributes

Field title in online report	XML element
	<SQLStatementAttributes>
SQL Statement Id	<StatementId>n</StatementId>
Subsystem name	<SubsystemName>name</SubsystemName>
Attach type	<AttachType>attachtype</AttachType>
Plan name	<PlanName>name</PlanName>
Plan bind time	<PlanBindTime>Mon-dd-yy hh:mm:ss</PlanBindTime>
DBRM name	<DBRMName>name</DBRMName>
DBRM token	<DBRMToken>token</DBRMToken>
DBRM date/time	<DBRMTime>Mon-dd-yy hh:mm:ss</DBRMTime>
Package ID	<PackageId>packageid</PackageId>
Location	<Location>location</Location>
Collectn name	<CollectionName>name</CollectionName>
Pkg BIND time	<PackageBindTime>Mon-dd-yy hh:mm:ss</PackageBindTime>
SQL function	<SQLFunction>function</SQLFunction>
Static/dynamic	<StaticDynamic>static or dynamic</StaticDynamic>
Prcmplr stmt#	<PrecompilerStatementNumber>n</PrecompilerStatementNumber>
DBRM section#	<DBRMSectionNumber>n</DBRMSectionNumber>
Prepare stmt#	<PrepareStatementNumber>n</PrepareStatementNumber>
CSECT/module	<CSECTModule>csect in module</CSECTModule>
Offset of call	<OffsetOfCall>n</OffsetOfCall>
Sample count	<SampleCount>n</SampleCount>
SQL req count	<SQLREQCT>n</SQLREQCT>
SQL CPU time	<SQLCPUTime>n</SQLCPUTime>
Service time	<ServiceTime>n</ServiceTime>
	<SQLTextLines>
SQL Statement	<SQLTEXT>sqltext</SQLTEXT>
	</SQLTextLines>
	</SQLStatementAttributes\t>

## F07 SQL WAIT Time by DBRM

Field title in online report	XML element
	<DetailLine>
Name	<Name> <i>name</i> </Name>
	<Description></Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> %</Percent>
	<SQLRequest>
Name	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt# SQL Function	<ProgramStatementFunction> <i>stmt function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

## F08 SQL WAIT Time by Statement

Field title in online report	XML element
	<SQLRequest>
Seqno	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Program Stmt# SQL Function	<ProgramStatementFunction> <i>name stmt function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>

Field title in online report	XML element
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>

## F09 SQL WAIT Time by Plan

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Plan/Pgm	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n %</Percent>
	<SQLRequest>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

## F10 SQL CPU/Service Time by DBRM

Field title in online report	XML element
	<SQLCPUTimeByDBRM>
Name	<DBRMName>name</DBRMName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>

Field title in online report	XML element
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLCPUTimeByDBRMDetail>
Name	<SequenceNumber>seqno</SequenceNumber>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByDBRMDetail>
	</SQLCPUTimeByDBRM>

## F11 SQL CPU/Service Time by Statement

Field title in online report	XML element
	<SQLCPUTimeByStatement>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Name	<ProgramName>name</ProgramName>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime>n</TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>

Field title in online report	XML element
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByStatement>

## F12 SQL CPU/Service Time by Plan

Field title in online report	XML element
	<SQLCPUTimeByPlan>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm	<PlanName>name</PlanName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime>n</TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	</SQLCPUTimeByPlanDetail>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm	<ProgramName>name</ProgramName>



Field title in online report	XML element
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime>n</TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByPlanDetail>
	</SQLCPUTimeByPlan>

## F13 DB2 Threads Analysis

Field title in online report	XML element
	<DB2 Threads Analysis>
SeqNum	<SeqNum>n</SeqNum>
Thread Addr	<ThreadAddr>address</ThreadAddr>
Attach	<Attach>type</Attach>
REQCT Range	<REQCTRange>n-n</REQCTRange>
--- SQL Calls --- Executed	<CallsExecuted>n</CallsExecuted>
--- SQL Calls --- Sampled	<CallsSampled>n</CallsSampled>
	</DB2ThreadsAnalysis>
	<ThreadTotals>
	<TotalCallsExecuted>n</TotalCallsExecuted>
	<TotalCallsSampled>n</TotalCallsSampled>
	</ThreadTotals>

## F14 DB2 CPU by Plan/Stored Proc

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Description	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<Category>
Seqno	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription >
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Category>
	<CSECT>
Seqno	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<DMRequest>
Seqno	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<DPAGroup>
Seqno	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<File>
Seqno	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>

Field title in online report	XML element
	</File>
	<LoadModule>
Seqno	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<NoSymAddressRange>
Seqno	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<SQLRequest>
Seqno	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<SVCRoutine>
Seqno	<SVCId>svcid</SVCId>
Description	<SVCDescription>description</SVCDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>

## F15 DB2 SQL CPU/Svc Time by Rq Loc

Field title in online report	XML element
	<SQLTimeByRequestLocation>
Name	<LocationName>location</LocationName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>

Field title in online report	XML element
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
Name	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm	<PlanName>name</PlanName>
Stmnt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByRequestLocation>

## F16 DB2 SQL CPU/Svc Time by Enclave

Field title in online report	XML element
	<SQLTimeByEnclave>
Token	<Token>token</Token>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>

Field title in online report	XML element
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
Token	<SequenceNumber>seqno</SequenceNumber>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByEnclave>

## F17 DB2 SQL CPU/Svc Time by Corrid

Field title in online report	XML element
	<SQLTimeByCorrelationId>
CorrId	<CorrelationId>id</CorrelationId>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>

Field title in online report	XML element
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
CorrId	<SequenceNumber>seqno</SequenceNumber>
Stmnt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByCorrelationId>

## F18 DB2 SQL CPU/Svc Time by Wkstn

Field title in online report	XML element
	<SQLTimeByWorkstationId>
Wkstn	<WorkstationId>id</WorkstationId>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>

Field title in online report	XML element
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
Wkstn	<SequenceNumber>seqno</SequenceNumber>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByWorkstationId>

## F19 DB2 SQL CPU/Svc Time by EndUsr

Field title in online report	XML element
	<SQLTimeByEndUser>
EndUsr	<EndUser>user</EndUser>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>

Field title in online report	XML element
	<SQLTimeByStatement>
EndUsr	<SequenceNumber>seqno</SequenceNumber>
Stmnt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByEndUser>

## F20 DB2 Class 3 Wait Times

The DB2Class3WaitTimesByPlan tag pair and sub-elements are repeated for each DB2 plan in the report.

Field title in online report	XML element
	<DB2Class3WaitTimesByPlan>
Plan Name	<PlanName>name</PlanName>
	<Class3WaitTimes>
Database I/O	<DatabaseIO>n</DatabaseIO>
Read I/O other	<ReadIOOther>n</ReadIOOther>
Write I/O other	<WriteIOOther>n</WriteIOOther>
IRLM Lock/Latch	<IRLMLockLatch>n</IRLMLockLatch>
DB2 Latch	<DB2Latch>n</DB2Latch>
Page Latch	<PageLatch>n</PageLatch>



Field title in online report	XML element
Log Write I/O	<LogWriteIO>n</LogWriteIO>
Log Read	<LogRead>n</LogRead>
ARC LOG QUIESCE	<ArcLogQuiesce>n</ArcLogQuiesce>
Phase 1 Write	<Phase1Write>n</Phase1Write>
TCP/IP LOB/XML	<TcpiLobXml>n</TcpiLobXml>
Glbl Contention	<GlblContention>n</GlblContention>
Group Messages	<GroupMessages>n</GroupMessages>
CF Requests	<CFRequests>n</CFRequests>
Drain Lock	<DrainLock>n</DrainLock>
Claim Release	<ClaimRelease>n</ClaimRelease>
COMMIT	<TaskSwitchCOMMIT>n</TaskSwitchCOMMIT>
OPEN/CLOSE	<TaskSwitchOPENCLOSE>n</TaskSwitchOPENCLOSE>
SYSLGRNG	<TaskSwitchSYSLGRNG>n</TaskSwitchSYSLGRNG>
Data Manager	<TaskSwitchDataManager>n</TaskSwitchDataManager>
Other	<TaskSwitchOther>n</TaskSwitchOther>
	</Class3WaitTimes>
	</DB2Class3WaitTimesByPlan>

---

## Java/USS/HFS Performance analysis reports

### J01 Java Summary/Attributes

Field title in online report	XML element
	<JavaSummary>
JVMId	<JVMId>n</JVMId>
Identifier	<Identifier>n</Identifier>
Heap	<Heap>nM</Heap>
Max	<HeapMax>nM</HeapMax>
Description	<Description>description</Description>
	</JavaSummary>
	<ObservedJavaPackages>
	<JavaPackages>
PkgId	<PkgId>n</PkgId>
Package Name	<PackageName>name</PackageName>
	</JavaPackages>
	</ObservedJavaPackages>
	<ObservedJavaClasses>
	<JavaClasses>
ClsId	<ClsId>n</ClsId>

Field title in online report	XML element
PkgId	<PkgId>n</PkgId>
Class Name	<ClassName>name</ClassName>
	</JavaClasses>
	</ObservedJavaClasses>
	<ObservedJavaMethods>
	</JavaMethods>
MthId	<MthId>n</MthId>
ClsId	<ClsId>n</ClsId>
Method Name	<MethodName>name</MethodName>
	</JavaMethods>
	</ObservedJavaMethods>

## J02 Java Heap Usage Timeline

Field title in online report	XML element
	<UsageTimeline>
SEQN	<SequenceNumber>n</SequenceNumber>
Storage	<StorageUsed>nK</Storage Used>
Total	<StorageTotal>nK</StorageTotal>
	</UsageTimeline>

## J03 Java CPU Usage by Thread

Field title in online report	XML element
	<JavaCPUbyThread>
JavaId	<JavaId>n</JavaId>
Thread Name	<ThreadName>name</ThreadName>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaCPUbyThread>

## J04 Java CPU Usage by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId>n</JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName>name</JavaPackageName>
	<Measurements>n</Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Pkg/Cls/Mthd	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

## J05 Java CPU Usage by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Class/Method	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Class/Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaLine>

Field title in online report	XML element
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Class/Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

## J06 Java CPU Usage by Method

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
MthId	<JavaLineNumberId>n</JavaLineNumberId>
Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>

## J07 Java CPU Usage by Call Path

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaMethod>

## J09 Java Service Time by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId>n</JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName>name</JavaPackageName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Pkg/Cls/Mthd	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

## J10 Java Service Time by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Class/Method	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>

Field title in online report	XML element
Class/Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Class/Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

## J11 Java Service Time by Method

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
MthId	<JavaLineNumberId>n</JavaLineNumberId>
Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>

## J12 Java Service Time by Call Path

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>

Field title in online report	XML element
	</JavaMethod>

## J14 Java Wait Time by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId>n</JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName>name</JavaPackageName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Pkg/Cls/Mthd	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

## J15 Java Wait Time by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Class/Method	<JavaClassName>name</JavaClassName>

Field title in online report	XML element
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Class/Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
JavaId	<JavaLineNumberId>n</JavaLineNumberId>
Class/Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

## J16 Java Wait Time by Method

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<JavaLine>
MthId	<JavaLineNumberId>n</JavaLineNumberId>
Method	<JavaLineNumber>lineno</JavaLineNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaLine>
	</JavaMethod>

## J17 Java Wait Time by Call Path

Field title in online report	XML element
	<JavaMethod>



Field title in online report	XML element
MthId	<JavaMethodId>n</JavaMethodId>
Method	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</JavaMethod>

## H01 HFS Service Time by Path Name

Field title in online report	XML element
	<HFSTimeByPathName>
FileId	<FileId>n</FileId>
Path Name	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</HFSTimeByPathName>

## H02 HFS Service Time by Device

Field title in online report	XML element
	<HFSTimeByDevice>
DevId	<DeviceId>n</DeviceId>
Device#>PathName	<DeviceNumber>n</DeviceNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<HFSTimeByPathName>
DevId	<FileId>n</FileId>
Device#>PathName	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</HFSTimeByPathName>
	</HFSTimeByDevice>

## H03 HFS File Activity

Field title in online report	XML element
	<HFSTimeByDevice>

Field title in online report	XML element
FileId	<FileId>n</FileId>
PathName	<PathName>name</PathName>
File Type	<FileType>filetype</FileType>
Reads/Writes	<ReadsWrites>n</ReadsWrites>
	</HFSFileActivity>

## H04 HFS File Attributes

Field title in online report	XML element
	<HFSFileAttributes>
FileId	<FileId>n</FileId>
Path name	<PathName>name</PathName>
File type	<FileType>filetype</FileType>
Major	<FileTypeMajor>n</FileTypeMajor>
Minor	<FileTypeMinor>n</FileTypeMinor>
Opened	<OpenTime>hh:mm:ss.ss</OpenTime>
Opened	<OpenDate>Day Mon dd yyyy</OpenDate>
Device#	<DeviceNumber>n</DeviceNumber>
Serial#	<SerialNumber>n</SerialNumber>
Open Flags	<OpenFlags>flags</OpenFlags>
File type	<ModeFlagsFileType>type</ModeFlagsFileType>
Permissions: Owner	<PermissionOwner>permission</PermissionOwner>
Permissions: Group	<PermissionGroup>permission</PermissionGroup>
Permissions: Other	<PermissionOther>permission</PermissionOther>
	<SetIdFlags>setid</SetIdFlags>
Read Requests Initial	<ReadRequestsFirst>n</ReadRequestsFirst>
Last	<ReadRequestsLast>n</ReadRequestsLast>
Delta	<ReadRequestsDelta>n</ReadRequestsDelta>
Write Requests Initial	<WriteRequestsFirst>n</WriteRequestsFirst>
Last	<WriteRequestsLast>n</WriteRequestsLast>
Delta	<WriteRequestsDelta>n</WriteRequestsDelta>
DIR I/O Blocks Initial	<DirectoryRequestsFirst>n</DirectoryRequestsFirst>
Last	<DirectoryRequestsLast>n</DirectoryRequestsLast>
Delta	<DirectoryRequestsDelta>n</DirectoryRequestsDelta>
Blocks Read Initial	<BlocksReadFirst>n</BlocksReadFirst>
Last	<BlocksReadLast>n</BlocksReadLast>
Delta	<BlocksReadDelta>n</BlocksReadDelta>
Blocks Written Initial	<BlocksWrittenFirst>n</BlocksWrittenFirst>
Last	<BlocksWrittenLast>n</BlocksWrittenLast>

Field title in online report	XML element
Delta	<BlocksWrittenDelta>n</BlocksWrittenDelta>
Bytes Read Initial	<BytesReadFirst>n</BytesReadFirst>
Last	<BytesReadLast>n</BytesReadLast>
Delta	<BytesReadDelta>n</BytesReadDelta>
Bytes Written Initial	<BytesWrittenFirst>n</BytesWrittenFirst>
Last	<BytesWrittenLast>n</BytesWrittenLast>
Delta	<BytesWrittenDelta>n</BytesWrittenDelta>
	</HFSFileAttributes>

## H05 HFS Device Activity

Field title in online report	XML element
	<HFSDeviceActivity>
DevId	<DeviceId>n</DeviceId>
Device#	<DeviceNumber>n</DeviceNumber>
Mount Point	<MountPoint>mountpoint</MountPoint>
Reads/Writes	<ReadsWrites>n</ReadsWrites>
	</HFSDeviceActivity>

## H06 HFS Device Attributes

Field title in online report	XML element
	<HFSDeviceAttributes>
DevId	<DeviceId>n</DeviceId>
Device#	<DeviceNumber>n</DeviceNumber>
Dataset name	<DatasetName>dsn</DatasetName>
DD name	<DDName>ddname</DDName>
Physical file system	<PhysicalFileSystem>filesystem</PhysicalFileSystem>
Mount point	<MountPoint>mountpoint</MountPoint>
Mounted	<MountTime>hh:mm:ss.ss</MountTime>
Mounted	<MountDate>Day Mon dd yyyy</MountDate>
Read Requests Initial	<ReadRequestsFirst>n</ReadRequestsFirst>
Last	<ReadRequestsLast>n</ReadRequestsLast>
Delta	<ReadRequestsDelta>n</ReadRequestsDelta>
Write Requests Initial	<WriteRequestsFirst>n</WriteRequestsFirst>
Last	<WriteRequestsLast>n</WriteRequestsLast>
Delta	<WriteRequestsDelta>n</WriteRequestsDelta>
DIR I/O Blocks Initial	<DirectoryRequestsFirst>n</DirectoryRequestsFirst>
Last	<DirectoryRequestsLast>n</DirectoryRequestsLast>

Field title in online report	XML element
Delta	<DirectoryRequestsDelta>n</DirectoryRequestsDelta>
Blocks Read Initial	<BlocksReadFirst>n</BlocksReadFirst>
Last	<BlocksReadLast>n</BlocksReadLast>
Delta	<BlocksReadDelta>n</BlocksReadDelta>
Blocks Written Initial	<BlocksWrittenFirst>n</BlocksWrittenFirst>
Last	<BlocksWrittenLast>n</BlocksWrittenLast>
Delta	<BlocksWrittenDelta>n</BlocksWrittenDelta>
Bytes Read Initial	<BytesReadFirst>n</BytesReadFirst>
Last	<BytesReadLast>n</BytesReadLast>
Delta	<BytesReadDelta>n</BytesReadDelta>
Bytes Written Initial	<BytesWrittenFirst>n</BytesWrittenFirst>
Last	<BytesWrittenLast>n</BytesWrittenLast>
Delta	<BytesWrittenDelta>n</BytesWrittenDelta>
	</HFSDDeviceAttributes>

## H07 HFS Activity Timeline

Field title in online report	XML element
	<HFSActivityTimeline>
File Information Samples	<Samples>n</Samples>
Duration	<Duration>n</Duration>
Path Name	<PathName>name</PathName>
FileId	<FileId>n</FileId>
File Type	<FileType>filetype</FileType>
Open for	<OpenFor>mode</OpenFor>
	<Intervals>
	<IntervalPct>n</IntervalPct> Repeated 50 times
	</Interval>
	</HFSActivityTimeline>

## H08 HFS Wait Time by Path Name

Field title in online report	XML element
	<HFSTimeByPathName>
FileId	<FileId>n</FileId>
Path Name	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>

Field title in online report	XML element
	</HFSTimeByPathName>

## H09 HFS Wait Time by Device

Field title in online report	XML element
	<HFSTimeByDevice>
DevId	<DeviceId>n</DeviceId>
Device#>PathName	<DeviceNumber>n</DeviceNumber>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<HFSTimeByPathName>
DevId	<FileId>n</FileId>
Device#>PathName	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</HFSTimeByPathName>
	</HFSTimeByDevice>

## H10 HFS Service Time by Request

Field title in online report	XML element
	<HFSTimeByRequest>
ReqId	<RequestId>n</RequestId>
Request>PathName	<Request>request</Request>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<HFSTimeByPathName>
ReqId	<FileId>n</FileId>
Request>PathName	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</HFSTimeByPathName>
	</HFSTimeByRequest>

## H11 HFS Wait Time by Request

Field title in online report	XML element
	<HFSTimeByRequest>
ReqId	<RequestId>n</RequestId>
Request>PathName	<Request>request</Request>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<HFSTimeByPathName>
ReqId	<FileId>n</FileId>
Request>PathName	<PathName>name</PathName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</HFSTimeByPathName>
	</HFSTimeByRequest>

---

## MQSeries Performance analysis reports

### Q01 MQSeries Activity Summary

Field title in online report	XML element
	<MQSeriesObjectsObserved>
Object Sequence Number	<ObjectSequenceNumber>n</ObjectSequenceNumber >
Object Manager Name	<QueueManagerName>name</QueueManagerName>
Object Name	<ObjectName>name</ObjectName>
Object Type	<ObjectType>type</ObjectType>
	</MQSeriesObjectsObserved>
	<MQSeriesCallsObserved>
Module	<Module>name</Module>
CSECT	<CSECT>name</CSECT>
Offset	<Offset>n</Offset>
Function	<Function>function</Function>
Queue Mgr	<QueueManager>name</QueueManager>
Object Name	<ObjectName>name</ObjectName>
	</MQSeriesCallsObserved>

## Q02 MQSeries CPU Usage by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</MQRequest>
	</MQQueue>

## Q03 MQSeries CPU Usage by Request

Field title in online report	XML element
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</MQQueue>
	</MQRequest>

## Q04 MQSeries CPU Usage by Txn/Queue

Field title in online report	XML element
	<Transaction>
Name	<TranName>name</TranName>
Description	<TranDescription>description</TranDescription>

Field title in online report	XML element
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</MQRequest>
	</MQQueue>
	</Transaction>

## Q05 MQSeries Service Time by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</MQRequest>
	</MQQueue>

## Q06 MQSeries Service Time by Request

Field title in online report	XML element
	<MQRequest>



Field title in online report	XML element
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQQueue>
	</MQRequest>

## Q07 MQSeries Service Time by Txn/Queue

Field title in online report	XML element
	<Transaction>
Name	<TranName> <i>name</i> </TranName>
Description	<TranDescription> <i>description</i> </TranDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>
	</Transaction>

## Q08 MQSeries Wait Time by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</MQRequest>
	</MQQueue>

## Q09 MQSeries Wait Time by Request

Field title in online report	XML element
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</MQQueue>
	</MQRequest>

## Q10 MQSeries Wait Time by Txn/Queue

Field title in online report	XML element
	<Transaction>
Name	<TranName>name</TranName>
Description	<TranDescription>description</TranDescription>

Field title in online report	XML element
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<MQQueue>
Name	<QueueManager>name</QueueManager>
Description	<QueueName>name</QueueName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<MQRequest>
Name	<MQRequestFunction>function</MQRequestFunction>
Description	<ProgramNameOffset>name+offset</ProgramNameOffset>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</MQRequest>
	</MQQueue>
	</Transaction>

## Q11 MQ+ Activity Timeline

The MQ+ ActivityTimeline tag pair is repeated nested for each MQ call and MQ Queue Manager detail line.

Field title in online report	XML element
	<MQActivityTimeline>
Seqno	<Seqno>n</Seqno>
Call	<Call>call type</Call>
Location	<Location>location</Location>
Msg Len	<MsgLen>n</Msglen>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Svc Time	<ServiceTime>n</ServiceTime>
CPU Time	<CPUTime>n</CPUTime>
	<MQActivityTimeLine>
Seqno	<QMgr>queue manager</QMgr>
Call	<ObjectName> queue name</ObjectName>
	</MQActivityTimeline>
	</MQActivityTimeline>

## Q12 MQ+ CPU/SVC Time by Queue

The MQ+ CPU Time by Queue tag pair is repeated nested for each MQ Queue Manager and MQ call detail line.

Field title in online report	XML element
	<MQCPUTimebyQueue>
Name	<Name>queue manager</Name>
Description	<Description>queue name</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<MQCPUTimebyQueue>
Name	<Name> call type</Name>
Description	<Description>location</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	</MQCPUTimebyQueue>
	</MQCPUTimebyQueue>

## Q13 MQ+ CPU/SVC Time by Request

The MQ+ CPU Time by Request tag pair is repeated nested for each MQ call and MQ Queue Manager detail line.

Field title in online report	XML element
	<MQCPUTimebyRequest>
Name	<Name>call type</Name>
Description	<Description>location</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<MQCPUTimebyRequest>
Name	<Name>queue manager</Name>
Description	<Description>queue name</Description>

Field title in online report	XML element
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	</MQCPUTimebyRequest>
	</MQCPUTimebyRequest>

## Q14 MQ+ CPU/SVC Time by Txn

The MQ+ CPU Time by Transaction tag pair is repeated nested for each transaction, MQ Queue Manager, and MQ call detail line.

Field title in online report	XML element
	<MQCPUTimebyTransaction>
Name	<Name>tran</Name>
Description	<Description>descr</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<MQCPUTimebyTransaction>
Name	<Name>queue manager</Name>
Description	<Description>queue name</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<MQCPUTimebyTransaction>
Name	<Name> call type</Name>
Description	<Description>location</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>

Field title in online report	XML element
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	</MQCPUTimebyTransaction>
	</MQCPUTimebyTransaction>
	</MQCPUTimebyTransaction>

---

## WebSphere performance analysis reports

### B01 WAS Summary

Field title in online report	XML element
	<WASSummary>
System name	<SystemName>name</SystemName>
Sysplex	<SysplexName>name</SysplexName>
Job name	<JobName>name</JobName>
Job id	<JobId>id</JobId>
ASID	<ASID>asid</ASID>
Cell	<Cell>name</Cell>
Node	<Node>name</Node>
Cluster	<Cluster>name</Cluster>
Server	<Server>name</Server>
WAS version	<WASVersion>version</WASVersion>
Service level	<ServiceLevel>level</ServiceLevel>
Total requests	<RequestedObserved>n</RequestedObserved>
IIOP requests	<IIOPRequests>n</IIOPRequests>
HTTP requests	<HTTPRequests>n</HTTPRequests>
HTTPS requests	<HTTPSRequests>n</HTTPSRequests>
MDB Plan A requests	<MDBPlanARequests>n</MDBPlanARequests>
MDB Plan B requests	<MDBPlanBRequests>n</MDBPlanBRequests>
MDB Plan C requests	<MDBPlanCRequests>n</MDBPlanCRequests>
SIP requests	<SIPRequests>n</SIPRequests>
SIPS requests	<SIPSRequests>n</SIPSRequests>
MBean requests	<MBeanRequests>n</MBeanRequests>
OTS requests	<OTSRequests>n</OTSRequests>
Internal requests	<InternalRequests>n</InternalRequests>
Inbound WOLA	<InboundWOLARequests>n</InboundWOLARequests>
Unknown requests	<UnknownRequests>n</UnknownRequests>
Asynchronous requests	<AsynchronousRequests>n</AsynchronousRequests>

Field title in online report	XML element
Timed out requests	<TimedOutRequests>n</TimedOutRequests>
Outbound WOLA requests	<OutboundWOLA>n</OutboundWOLA>
Outbound unknown	<OutboundUnknown>n</OutboundUnknown>
Total service time	<TotalServiceTime>hh:mm:ss.sss</TotalServiceTime>
WLM queued time	<WLMQueuedTime>hh:mm:ss.sss</WLMQueuedTime>
Dispatched time	<DispatchedTime>hh:mm:ss.sss</DispatchedTime>
Controller time	<ControllerTime>hh:mm:ss.sss</ControllerTime>
Asynchronous time	<AsynchronousTime>hh:mm:ss.sss</AsynchronousTime>
Enclave CPU time	<EnclaveCPUTime>hh:mm:ss.sss</EnclaveCPUTime>
Encl zIIP CPU time	<EnclavezIIPCPUTime>hh:mm:ss.sss</EnclavezIIPCPUTime>
Encl zAAP CPU time	<EnclavezAAPCPUTime>hh:mm:ss.sss</EnclavezAAPCPUTime>
Encl CPU s/units	<EnclaveCPUServiceUnits>n</EnclaveCPUServiceUnits>
Encl zIIP s/units	<EnclavezIIPServiceUnits>n</EnclavezIIPServiceUnits>
Encl zAAP s/units	<EnclavezAAPServiceUnits>n</EnclavezAAPServiceUnits>
Async Encl CPU time	<AsyncEnclCPUTime> hh:mm:ss.sss </AsyncEnclCPUTime>
Async Encl zIIP CPU	<AsyncEnclzIIPCPU> hh:mm:ss.sss</AsyncEnclzIIPCPU>
Async Encl zAAP CPU	<AsyncEnclzAAPCPU> hh:mm:ss.sss</AsyncEnclzAAPCPU>
	</WASSummary>

## B02 WAS Activity

Field title in online report	XML element
	<WASActivitybyRequest >
Seqno	<Seqno>n</Seqno>
Request, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyRequest>

## B03 WAS Activity by Origin

Field title in online report	XML element
	<WASActivitybyOrigin >
Seqno	<Seqno>n</Seqno>

Field title in online report	XML element
Origin, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyOrigin>

## B04 WAS Activity by Servant

Field title in online report	XML element
	<WASActivitybyServant >
Seqno	<Seqno>n</Seqno>
Servant,Req,EJB/Web, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyServant>

## B05 WAS EJB Activity

Field title in online report	XML element
	<WASEJBActivitybyRequest >
Seqno	<Seqno>n</Seqno>
EJB, Method Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyRequest>



## B06 WAS EJB Activity by Origin

Field title in online report	XML element
	<WASEJBActivitybyOrigin >
Seqno	<Seqno>n</Seqno>
Origin, EJB, Method Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyOrigin>

## B07 WAS EJB Activity by Servant

Field title in online report	XML element
	<WASEJBActivitybyServant >
Seqno	<Seqno>n</Seqno>
Servant, EJB, Method Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyServant>

## B08 WAS Servlet/JSP Activity

Field title in online report	XML element
	<WASServletJSPActivitybyRequest >
Seqno	<Seqno>n</Seqno>
Web App, Servlet/JSP Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>

Field title in online report	XML element
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASServletJSPActivitybyRequest>

## B09 WAS Servlet/JSP Activity by Origin

Field title in online report	XML element
	<WASServletJSPActivitybyOrigin>
Seqno	<Seqno>n</Seqno>
Origin, Web App, Servlet/JSP Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASServletJSPActivitybyOrigin>

## B10 WAS Servlet/JSP by Activity by Servant

Field title in online report	XML element
	<WASServletJSPActivitybyServant>
Seqno	<Seqno>n</Seqno>
Servant, Web App, Servlet/JSP Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASServletJSPActivitybyServant>

## B11 WAS/CICS Calls

Field title in online report	XML element
	<WASCICSCalls>
Name	<Name>Name</Name>
Count	<Count>n</Count>

Field title in online report	XML element
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WASCICSCalls>

## B12 WAS/DB2 Calls

Field title in online report	XML element
	<WASDB2Activity>
Seqno	<SequenceNumber>n</SequenceNumber>
WAS Request	<WASRequest>name</WASRequest>
Nbr of SQL Calls	<NumberofCalls>n</NumberofCalls>
--CPU Time – Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time – Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time – Mean	<PctCPUTime>n</PctCPUTime>
--Svc Time – Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time – Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time – Mean	<PctServiceTime>n</PctServiceTime>
	</WASDB2Activity>
	<SQLCPUTimeByStatement>
Seqno	<SequenceNumber>n</SequenceNumber>
DB2 Call	<ProgramName>name</ProgramName>
	<StatementNumber>n</StatementNumber>
	<SQLFunction>name</SQLFunction>
Nbr of SQL Calls	<NumberofCalls>n</NumberofCalls>
--CPU Time – Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time – Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time – Mean	<PctCPUTime>n</PctCPUTime>
--Svc Time – Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time – Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time – Mean	<PctServiceTime>n</PctServiceTime>
	</SQLCPUTimeByStatement>
	<SQLTextLines>
	<SQLTEXT>text</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>n</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>

## B13 Async Work Requests

Field title in online report	XML element
	<AsyncWorkRequest>
Seqno	<Seqno>n</Seqno>
Pkg/Class, Work Mgr	<Name>name</Name>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</ AsyncWorkRequest>

## B14 Async Work by Manager

Field title in online report	XML element
	<AsyncWorkbyWorkMgr>
Seqno	<Seqno>n</Seqno>
Work Mgr , Pkg/Class	<Name>name</Name>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</ AsyncWorkbyWorkMgr>

## B15 Async Work by Servant

Field title in online report	XML element
	<AsyncWorkbyServant>
Seqno	<Seqno>n</Seqno>
Servant, Pkg/Class, Work Mgr	<Name>name</Name>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</ AsyncWorkbyServant>

## B16 WOLA Inbound Requests

Field title in online report	XML element
	<WOLAInboundbyRequest>
Seqno	<Seqno>n</Seqno>
Request, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAInboundbyRequest >

## B17 WOLA Inbound by Origin

Field title in online report	XML element
	<WOLAInboundbyRequest>
Seqno	<Seqno>n</Seqno>
Origin, Request, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAInboundbyOrigin>

## B18 WOLA Inbound by Servant

Field title in online report	XML element
	<WOLAInboundbyServant>
Seqno	<Seqno>n</Seqno>
Servant, Request, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time – Total	<TotalCPU>n</TotalCPU>

Field title in online report	XML element
--CPU Time – Mean	<MeanCPU>n</MeanCPU>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAInboundbyServant >

## B19 WOLA Outbound Requests

Field title in online report	XML element
	<WOLAOutboundbyRequest>
Seqno	<Seqno>n</Seqno>
Request, Register, Service	<Name>name</Name>
Request Count	<Count>n</Count>
--Bytes-- Sent	<BytesSent>n</BytesSent>
--Bytes-- Rcvd	<BytesRcvd>n</BytesRcvd>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAOutboundbyRequest>

## B20 WOLA Outbound by Register

Field title in online report	XML element
	<WOLAOutboundbyRegister>
Seqno	<Seqno>n</Seqno>
Register, Service	<Name>name</Name>
Request Count	<Count>n</Count>
--Bytes-- Sent	<BytesSent>n</BytesSent>
--Bytes-- Rcvd	<BytesRcvd>n</BytesRcvd>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAOutboundbyRequest>

## B21 WOLA Outbound by Servant

Field title in online report	XML element
	<WOLAOutboundbyServant>
Seqno	<Seqno>n</Seqno>
Servant, Register, Service	<Name>name</Name>

Field title in online report	XML element
Request Count	<Count>n</Count>
--Bytes-- Sent	<BytesSent>n</BytesSent>
--Bytes-- Rcvd	<BytesRcvd>n</BytesRcvd>
--Svc Time – Total	<TotalService>n</TotalService>
--Svc Time – Mean	<MeanService>n</MeanService>
	</WOLAOutboundbyServant>

## Multiple address space reports

### X01 CICS Mean Service Time by Txn

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSApplid>
Name	<Applid>name</Applid>
Description	<Description>Region Applid</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSApplid>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>

Field title in online report	XML element
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<SQL>offset</SQL>
Description	<Description>sqlverb</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>



Field title in online report	XML element
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## X02 CICS Total Service Time by Txn

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSAppId>
Name	<AppId>name</AppId>
Description	<Description>Region AppId</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSAppId>
	<CICSProgram>
Name	<Program>name</Program>

Field title in online report	XML element
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<SQL>offset</SQL>
Description	<Description>sqlverb</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSCLI>

Field title in online report	XML element
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

### X03 CICS Mean Service Time by Term

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId>termid</TerminalId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSAppId>
Name	<AppId>name</AppId>
Description	<Description>Region AppId</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSAppId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## X04 CICS Total Service Time by Term

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Table 22. XML Elements for X04 Report Field Titles

Field title in online report	XML element
	<CICSTerminal>

Table 22. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
Name	<TerminalId>termid</TerminalId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSAppId>
Name	<AppId>name</AppId>
Description	<Description>Region AppId</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSAppId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>

Table 22. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>

Table 22. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

## X05 Combined DB2 IMS MQ Timeline

The CombinedTimeline tag pair is repeated for each DB2, IMS, and MQ call. When an expanded report is requested, SQL text lines, Prepare lines, and MQ Queue Manager lines may also be generated in the XML.

Field title in online report	XML element
	<CombinedTimeline>
Seqno	<SeqNum>n</SeqNum>
System	<System>DB2, IMS or MQ</System>
Function	<Function>function</Function>
Object	<Object>object</Object>
Status	<Status>status</Status>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Svc Time	<SvcTime>n</SvcTime>
CPU Time	<CPUTime>n</CPUTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>n</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	<CombinedTimelineMQ>
	<QueueManager>queue manager</QueueManager>
	<ObjectName>queue name</ObjectName>
	</CombinedTimelineMQ>
	</CombinedTimeline>



---

## Source Program Attribution

### P01 Source Program Attribution

Field title in online report	XML element
	<LoadModuleInformation>
Load Module	<LoadModuleName>name</LoadModuleName>
LIB	<LoadLibrary>library</LoadLibrary>
CSECT	<CSECTName>name</CSECTName>
Mapped by	<SourceMappingFile>file</SourceMappingFile>
	<SourceLanguage>language</SourceLanguage>
Compiler	<Compiler>compiler</Compiler>
Compile Time	<CompileTime>yyyy/mm/dd hh:mm:ss</CompileTime>
	</LoadModuleInformation>
	<SourceStatement>
LineNo	<LineNumber>n</LineNumber>
Offset	<Offset>n</Offset>
Prct or Count	<Percent>n</Percent> or <Count>n</Count>
Source Statement	<Statement>stmt</Statement>
	<Attribution>
	<Percent>n</Percent> or <Count>n</Count>
	</Attribution>
	</SourceStatement>



---

## Appendix D. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The accessibility features in z/OS provide accessibility for IBM Application Performance Analyzer.

The major accessibility features in z/OS enable users to:

- Use assistive technology products such as screen readers and screen magnifier software
- Operate specific or equivalent features by using only the keyboard
- Customize display attributes such as color, contrast, and font size

---

### Using assistive technologies

Assistive technology products work with the user interfaces that are found in z/OS. For specific guidance information, consult the documentation for the assistive technology product that you use to access z/OS interfaces.

---

### Keyboard navigation of the user interface

Users can access z/OS user interfaces by using TSO/E or ISPF. Refer to the following publications:

- *z/OS TSO/E Primer*
- *z/OS TSO/E User's Guide*
- *z/OS ISPF User's Guide Volume 1*

These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

---

### Accessibility of this document

The XHTML format of this document that will be provided in the IBM Problem Determination Tools information center at <http://publib.boulder.ibm.com/infocenter/pdthelp/index.jsp> is accessible to visually impaired individuals who use a screen reader.

To enable your screen reader to accurately read syntax diagrams, source code examples, and text that contains the period or comma picture symbols, you must set the screen reader to speak all punctuation.

When you use JAWS for Windows, the links to accessible syntax diagrams might not work. Use IBM Home Page Reader to read the accessible syntax diagrams.



---

## Appendix E. Notices

References in this publication to IBM products, programs, or services do not imply that IBM intends to make these available in all countries in which IBM operates. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Subject to IBM's valid intellectual property or other legally protectable rights, any functionally equivalent product, program, or service may be used instead of the IBM product, program, or service. The evaluation and verification of operation in conjunction with other products, except those expressly designated by IBM, are the responsibility of the user.

IBM may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
500 Columbus Avenue  
Thornwood, NY 10594  
U.S.A.

Licensees of this program who want to have information about it for the purpose of enabling (1) the exchange of information between independently created programs and other programs (including this one) and (2) the mutual use of the information that has been exchanged, should contact:

IBM Corporation, Department HHX/H3  
555 Bailey Avenue  
San Jose, CA 95141-1099  
U.S.A.

Such information might be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.



---

## Trademarks

IBM, the IBM logo, and [ibm.com](http://ibm.com) are trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at “Copyright and trademark information” at [www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml).

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Java and all Java-based trademarks and logos are trademarks of Oracle and/or its affiliates.

LINUX is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.





---

## Bibliography

### **IBM Application Performance Analyzer for z/OS documents**

*Customization Guide*, SC14-7598-04

*Messages Guide*, SC14-7599-04

*Program Directory*, GI11-9490

*User's Guide*, SC14-7597-04

### **Documents for related products**

#### **z/OS**

*ISPF Planning and Customizing*, GC34-4814

*MVS JCL Reference*, SA22-7597

*MVS JCL User's Guide*, SA22-7598

*MVS System Commands*, SA22-7627

*Security Server RACF<sup>®</sup> Command Language Reference*, SA22-7687

*Security Server RACF Security Administrator's Guide*, SA22-7683

*TSO/E Command Reference*, SA22-7782

*TSO/E Programming Guide*, SA22-7788

*TSO/E System Programming Command Reference*, SA22-7793

*TSO/E User's Guide*, SA22-7794

*z/OS Initialization and Tuning Reference*, SA22-7533

#### **OS/390**

*ISPF Planning and Customizing*, SC28-1298

*MVS JCL Reference*, GC28-1757

*MVS JCL User's Guide*, GC28-1758

*MVS System Commands*, GC28-1781

*Security Server (RACF) Command Language Reference*, SC28-1919

*Security Server (RACF) Security Administrator's Guide*, SC28-1915

*TSO/E Command Reference*, SC28-1969

#### **AT-TLS**

*z/OS Communications Server: IP Configuration Guide*, SC31-8775-15

*z/OS Communications Server: IP Configuration Reference*, SC31-8776-16

*z/OS Security Server RACF Command Language Reference*, SA22-7687-13

*DB2 9 for z/OS: Configuring SSL for Secure Client-Server Communications*, REDP-4630-00

#### **CICS**

*Application Programming Guide*, SC34-5993

*Application Programming Primer*, SC33-0674

*Application Programming Reference*, SC34-5994

*CICS Supplied Transactions*, SC34-5992

*CICS Transaction Server for z/OS Release Guide*, GC34-6218

**DB2 UDB for OS/390 and z/OS**

*Administration Guide, SC26-9931*

*Application Programming and SQL Guide, SC26-9933*

*Command Reference, SC26-9934*

*Data Sharing: Planning and Administration, SC26-9935*

*Installation Guide, GC26-9936*

*Messages and Codes, GC26-9940*

*Reference for Remote DRDA\* Requesters and Servers, SC26-9942*

*Release Planning Guide, SC26-9943*

*SQL Reference, SC26-9944*

*Utility Guide and Reference, SC26-9945*

**IMS**

*IMS Version 8 Installation Volume 1: Installation Verification, GC27-1297*

*IMS Version 7 Installation Volume 1: Installation Verification, GC26-9429*

**WebSphere MQ**

*WebSphere MQ for z/OS Concepts and Planning Guide, GC34-6926*

*WebSphere MQ for z/OS System Administration Guide, GC34-6929*

*WebSphere MQ for z/OS System Setup Guide, GC34-6927*

---

## Glossary

### A

**abend** Abnormal end of a task. The termination of a task before its completion because of an error condition that cannot be resolved by recovery facilities while the task is executing.

**access plan**

The set of access paths that are selected by the optimizer to evaluate a particular SQL statement.

**APF** Authorized program facility. A facility that permits the identification of programs that are authorized to use restricted functions.

**authorized program**

A system program or user program that is allowed to use restricted functions.

### B

**batch** A processing mode in which a predefined series of actions are performed with little or no interaction between the user and the system.

**bind** To convert the output from the SQL compiler to a usable control structure.

### C

**checkpoint**

A place in a program at which a check is made, or at which data is recorded, to provide real-time monitoring.

**checkpoint data set**

A data set that contains checkpoint records.

**connection authorization exit**

An exit that approves or disapproves requests for a connection to another program.

### D

**data set**

The major unit of data storage and retrieval, consisting of a collection of data in one of several prescribed arrangements and described by control information to which the system has access.

**dynamic**

Pertaining to events that occur at run time or during processing.

### E

**explain**

To capture detailed information about the access plan that was chosen by the SQL compiler to resolve an SQL statement.

### I

**ISPF** Interactive system productivity facility. An IBM licensed program that serves as a full-screen editor and dialog manager.

### J

**JCL** Job control language. A control language that is used to identify a job to an operating system and to describe the job's requirements.

### M

**monitor**

To collect data about an application from the running agents that are associated with the application.

### P

**panel** An area of the screen that displays formatted information and that can include entry fields.



# Index

## A

- A01 Source program mapping report 639
- A011 Source program mapping pick list 648
- A03 Java source program mapping 643
- A04 Source mapping dataset list 645
- A05 Source mapping common list 647
- abend code 695
- ACCUM 709, 721
- action (menu) bar, described 1
- active jobs, measure by selecting from a list 29
- active jobs, specify job is active 41
- ACTIVE keyword in batch interface 688, 700
- Active status of observation session 11
- Adabas 100, 126
  - Adabas category in C01 report 82
  - Adabas data extractor, specifying detail line in CICS reports 204, 215, 225, 237, 246, 255, 264, 272, 606, 614, 622, 630
  - displaying the Adabas category in reports 88, 105, 129
  - reporting 86
- ADABAS
  - reporting in batch 681
- ADATA 639, 810
- Admin/Miscellaneous reports
  - A01 Source program mapping 639
  - A03 Java source program mapping 643
  - A04 Source mapping dataset list 645
  - A05 Source mapping common list 647
  - A11 Source program mapping pick list 648
- aggregated service time 356, 360, 364
- ALL 37
- ALLSTEPS keyword in batch interface 688, 699
- AMODE 78, 715
- API in batch interface 687
- Application Performance Analyzer GUI 723
  - accelerator keys 782
  - address book preferences 729
  - communications 724
  - email preferences 727
  - filter observations 744
  - general preferences 726
  - getting started 723
  - Help Search view 797
  - individual report view 780
  - list information 735
  - logging/debug preferences 731
  - Logon dialog 725
  - new observations 746
  - new threshold observation 762
  - Observation Detail view 773

- Application Performance Analyzer GUI (continued)
  - Observation Report List view 774
  - observations list 743
  - refresh observations 744
  - report download options
    - preferences 732
  - search observations 745
  - Search Results view 796
  - source program mapping
    - preferences 733
  - status line 734
  - STC list 736
  - STC properties 742
  - system requirements 724
- arithmetic means 167, 207, 241
- ASID 61, 120, 719
- ASID keyword in batch interface 688, 700
- auto deletion of sample files 10
- Auto-refresh mode 709
- automatic deletion 18

## B

- B01 WAS Summary report 531
- B02 WAS Activity report 534
- B03 WAS Activity by Origin report 538
- B04 WAS Activity by Servant report 543
- B05 WAS EJB Activity report 547
- B06 WAS EJB Activity by Origin report 550
- B07 WAS EJB Activity by Servant report 553
- B08 WAS Servlet/JSP Activity report 557
- B09 WAS Servlet/JSP by Origin report 560
- B10 - WAS Servlet/JSP by Servant report 563
- B11 - WAS/CICS Calls 566
- B11 WAS/CICS Calls report 932
- B12 - WAS/DB2 Calls 569
- B12 WAS/DB2 Calls report 933
- B13 - Async Work Requests 573
- B14 - Async Work by Work Mgr 575
- B15 - Async Work by Servant 578
- B16 - WOLA Inbound Requests 581
- B17 - WOLA Inbound by Origin 584
- B18 - WOLA Inbound by Servant 588
- B19 - WOLA Outbound Requests 592
- B20 - WOLA Outbound by Register 594
- B21 - WOLA Outbound by Servant 597
- Batch import 708
- Batch interface
  - API 687
  - CANCEL command 688
  - command summary diagram 688
  - command syntax 687
  - DELETE command 688, 707
  - KEEP command 688

Batch interface (continued)

- NEW command 687, 695
- sample JCL 690
- TNEW command 707
- Batch interface keywords
  - ACTIVE 688, 700
  - ALLSTEPS 688, 699
  - ASID 688, 700
  - CTERM 688, 700
  - CTRAN 688, 700
  - DB2IMAX 688, 698
  - DB2SP 688, 702
  - DDFFILTERS 688, 702
  - DELAYSAMPLING 688, 697
  - DESCR 688, 697
  - DIRS 688, 699
  - DURATION 688, 697
  - EXPDAYS 688, 697
  - FEATURES 688, 698
  - IMSID 688, 703
  - IMSIMAX 688, 698
  - IPROG 688, 701
  - ITRAN 688, 700
  - IUSER 688, 701
  - JOBNAME 688, 695
  - JOBNAMES 688, 703
  - LIBS 688, 698
  - NONCTERM 688, 700
  - NOTIFY 688, 697
  - RETRYAFTER 688, 705
  - RUNAGAIN 688, 705
  - RUNTOEOS 688, 697
  - SAMPDSN 706
  - SAMPLES 688, 697
  - SCHDDATE 688, 705
  - SCHDSPAN 688, 705
  - STEP 688, 699
  - SYSCTRAN 688, 700
  - SYSTEMS 688, 696
  - USSOBS 688, 697
  - WASFILTERS 703
- BMP 281, 294, 295, 296, 298, 302, 305, 306, 311, 314, 315, 317, 321
- buffer pools (VSAM) 164

## C

- C01 CPU usage by category report 82
- C02 CPU usage by module report 90
- C03 CPU usage by code slice report 93
- C04 CPU usage timeline report 97
- C05 CPU usage by task/category report 99
- C06 CPU usage by task/module report 106
- C07 CPU usage by procedure report 110
- C08 CPU usage referred attribution report 114
- C09 CPU usage by PSW/object code report 120

C10 CPU usage by Natural Program report 123  
 CAN (Cancel) line command 10  
 CANCEL 708  
 CANCEL command in batch interface 688  
 CANCEL primary command 2  
 Cancel status of observation session 12  
 cancelling an active observation request 10  
 CAZPRINT 659, 664  
 CICS 46, 193, 712  
   data extractor, overview of 193  
   data extractor, specifying 24  
   multiple address space support 194  
   source program mapping 200, 207, 218, 241, 250, 259, 267, 274, 637  
   transaction, specifying which ones to measure 28  
   translation of trancodes to upper case 17  
 CICS measurement reports  
   CICS CPU and use count by program report (E02) 198  
   CICS CPU usage by transaction report (E03) 200  
   CICS CPU/service time by transaction report (E12) 274  
   CICS mean service time by terminal ID report (E08) 241  
   CICS mean service time by terminal ID report (X03) 616  
   CICS mean service time by transaction report (E04) 207  
   CICS mean service time by transaction report (X01) 601  
   CICS mean service time by user ID report (E10) 259  
   CICS service time by task ID report (E06) 229  
   CICS session statistics report (E01) 195  
   CICS total service time by terminal ID report (E09) 250  
   CICS total service time by terminal ID report (X04) 624  
   CICS total service time by transaction report (X02) 609  
   CICS total service time by Txn report (E05) 218  
   CICS total service time by user ID report (E11) 267  
   CICS wait by Txn report (E07) 239  
 CICS trancode 31  
 CICS+  
   CICS+ data extractor, specifying 24  
   data extractor, overview of 194  
 CICSSusp 209, 219, 224, 230, 240  
 COBOL  
   versions supported for source mapping 640  
 Code slice 93, 96  
 Collapse 4  
 Collection name 366  
 Common data set list 637  
 completion notification 22  
 CONNECT 419  
 CONNECT primary command 3  
 context help 4, 9  
 context menu 4, 9  
 CONVERT statement in print reports JCL 670  
 CONVERT statement in XML documents 670  
 Coupling facility reports  
   Coupling facility mean times report (G02) 167  
   Coupling facility summary report (G01) 165  
   Coupling facility total times report (G03) 168  
 CPU Time 44, 77  
 CPU time percentage calculation 49  
 CPU usage analysis reports  
   CPU usage by category report (C01) 82  
   CPU usage by code slice report (C03) 93  
   CPU usage by Natural Program report (C10) 123  
   CPU usage by procedure report (C07) 110  
   CPU usage by PSW/object code report (C09) 120  
   CPU usage by task/category report (C05) 99  
   CPU usage by task/module report (C06) 106  
   CPU usage module report (C02) 90  
   CPU usage referred attribution report (C08) 114  
   CPU usage timeline report (C04) 97  
 CPU WAIT analysis reports  
   WAIT time by tape DDNAME report (W05) 140  
   WAIT time by task ENQ/RESERVE report (W04) 137  
   WAIT time by task/category report (W01) 125  
   WAIT time by task/module report (W02) 130  
   WAIT time referred attribution report (W03) 134  
 CSECT 83, 90, 100, 106, 115, 126, 130, 161, 293, 649, 814  
 CTERM keyword in batch interface 688, 700  
 CTRAN keyword in batch interface 688, 700  
 CURRENT 709, 721  
 customer support 802  
 Cylinder Address 142, 144

**D**  
 D 24  
 D file type 646  
 D01 DASD usage by device report 142  
 D02 DASD usage by DDNAME report 144  
 D03 DASD usage by data set report 147  
 D04 Data set attributes report 149  
 D05 DASD EXCP summary report 151  
 D06 DASD VSAM statistics report 154  
 D07 DASD activity timeline report 157  
 D08 DASD I/O wait time report 159  
 D09 VSAM buffer pool usage report 164  
 DASD 50, 142, 144, 147, 149, 151, 154, 157, 159, 164, 294  
 DASD I/O analysis reports  
   DASD activity timeline report (D07) 157  
   DASD EXCP summary report (D05) 151  
   DASD I/O wait time report (D08) 159  
   DASD usage by data set report (D03) 147  
   DASD usage by DDNAME report (D02) 144  
   DASD usage by device report (D01) 142  
   DASD VSAM buffer pool usage report (D09) 164  
   DASD VSAM statistics report (D06) 154  
   Data set attributes report (D04) 149  
 data extractor 193, 279, 343, 417, 459, 698  
 data extractors (fields in new request) 24  
 DATAMG category 293  
 DB2 343, 711  
   data extractor, overview of 344  
   DB2 data extractor, specifying 24  
   DB2 EXPLAIN report 411  
   DB2SQL category in C01 report 82, 415  
   DB2V data extractor, specifying 24  
   DB2X data extractor, specifying 24  
   displaying SQL statement text 345  
   multiple address space support 346  
   source program mapping 355, 359, 363, 369, 372, 374, 377, 380, 383, 388, 392, 395, 398, 402, 406, 637, 639, 645, 648  
   SQL statement in DB2SQL category in C01 report 82  
   SQL statement sequence numbers 346  
   stored procedures, report (F14) 388  
 DB2 measurement reports  
   DB2 Class 3 Wait Times (F20) 409  
   DB2 CPU by plan/stored proc report (F14) 388  
   DB2 measurement report (F01) 347  
   DB2 SQL activity by DBRM report (F03) 355  
   DB2 SQL activity by plan report (F05) 363  
   DB2 SQL activity by statement report (F04) 359  
   DB2 SQL activity timeline report (F02) 352  
   DB2 SQL CPU/Svc time by Corrid report (F17) 398  
   DB2 SQL CPU/Svc time by DBRM report (F10) 377  
   DB2 SQL CPU/Svc time by enclave report (F16) 395

DB2 measurement reports (*continued*)

- DB2 SQL CPU/Svc time by EndUsr report (F19) 406
- DB2 SQL CPU/Svc time by plan report (F12) 383
- DB2 SQL CPU/Svc time by Rq Loc report (F15) 392
- DB2 SQL CPU/Svc time by stmt report (F11) 380
- DB2 SQL CPU/Svc time by Wkstn report (F18) 402
- DB2 SQL statement attributes report (F06) 366
- DB2 SQL threads analysis report (F13) 387
- DB2 SQL wait time by DBRM report (F07) 369
- DB2 SQL wait time by plan report (F09) 374
- DB2 SQL wait time by statement report (F08) 372
- DB2 package 59
- DB2+ 344, 688
- DB2+ data extractor 24
- DB2IMAX keyword in batch interface 688, 698
- DB2SP keyword in batch interface 688, 702
- DB2V 688
- DB2X 24, 688
- DBRM 59, 347, 352, 355, 369, 377
- DCB 28
- DDF 64
  - measuring DDF activity 344
- DDFFILTERS keyword in batch interface 688, 702
- DDNAME 140, 144
- Delay by (field in new request) 22
- delaying initiation of a measurement 22
- DELAYSAMPLING keyword in batch interface 688, 697
- DELETE command in batch interface 688, 707
- deleting an observation request 9
- DESC 671
- DESC statement in print reports JCL 671
- DESCR keyword in batch interface 688, 697
- Description field in observation session 11
- Description, optional field in observation request 21
- DIRS keyword in batch interface 688, 699
- DOWN primary command 3
- DPA (Descriptive Program Attribution) groups, described 83
- DPA Group 100, 126, 292
  - reporting in batch 681
- Duration 18
- Duration (field in new request) 21
- DURATION keyword in batch interface 688, 697

**E**

- E01 CICS session statistics report 195
- E02 CICS CPU and use count by program report 198
- E03 CICS CPU usage by transaction report 200
- E04 CICS mean service time by transaction report 207
- E05 CICS total service time by Txn report 218
- E06 CICS service time by task ID report 229
- E07 CICS wait by Txn report 239
- E08 CICS mean service time by terminal ID report 241
- E09 CICS total service time by terminal ID report 250
- E10 CICS mean service time by user ID report 259
- E11 CICS total service time by user ID report 267
- E12 CICS CPU/service time by transaction report 274
- Elapsed Time 44
- enclave 64
- END primary command 2
- Ended status of observation session 12
- ENQ 137
- ErrMsg status of observation session 12
- EXCP 151
- EXCP Count 44
- Expand 4
- EXPDAYS keyword in batch interface 688, 697
- EXPLAIN 411
- EXPORT line command 10
- external symbol 22

**F**

- F01 DB2 measurement report 347
- F02 DB2 SQL activity timeline report 352
- F03 DB SQL activity by DBRM report 355
- F04 DB2 SQL activity by statement report 359
- F05 DB2 SQL activity by plan report 363
- F06 DB2 SQL statement attributes report 366
- F07 DB2 SQL wait time by DBRM report 369
- F08 DB2 SQL wait time by statement report 372
- F09 DB2 SQL wait time by plan report 374
- F10 DB2 SQL CPU/Svc time by DBRM report 377
- F11 DB2 SQL CPU/Svc time by stmt report 380
- F12 DB2 SQL CPU/Svc time by plan report 383
- F13 DB2 SQL threads analysis report 387
- F14 DB2 CPU by plan/stored proc report 388

- F15 DB2 SQL CPU/Svc time by Rq Loc report 392
- F16 DB2 SQL CPU/Svc time by enclave report 395
- F17 DB2 SQL CPU/Svc time by Corrid report 398
- F18 DB2 SQL CPU/Svc time by Wkstn report 402
- F19 DB2 SQL CPU/Svc time by EndUsr report 406
- F20 DB2 Class 3 Wait Times report 409
- Failed status of observation session 12
- FEATURES keyword in batch interface 688, 698
- FIND primary command 3
- First Schedule Date (field for future schedule) 40
- First Schedule Time (field for future schedule) 40
- fixes, getting 801
- FPP 295, 298, 302, 305, 311, 314, 317, 321
- freeze 49
- future schedule options in panel 8 41
- future scheduled requests, entering 38

**G**

- G01 Coupling facility summary report 165
- G02 Coupling facility mean times report 167
- G03 Coupling facility total times report 168
- green light 16
- GUI 723

**H**

- H01 HFS Service Time by Path Name report 504
- H02 HFS Service Time by Device report 506
- H03 HFS File Activity report 509
- H04 HFS File Attributes report 511
- H05 HFS Device Activity report 512
- H06 HFS Device Attributes report 514
- H07 HFS Activity Timeline report 515
- H08 HFS Wait Time by Path Name report 517
- H09 HFS Wait Time by Device report 519
- H10 HFS Service Time by Request report 522
- H11 HFS Wait Time by Request report 524
- HELP 4
- HELP, displaying HELP panels 2
- HFS 459
- HFS analysis reports
  - HFS Activity Timeline (H07) 515
  - HFS Device Attributes (H06) 514
  - HFS File Activity (H03) 509
  - HFS File Attributes (H04) 511
  - HFS Service Time by Device (H02) 506

HFS analysis reports (*continued*)  
 HFS Service Time by Path Name (H01) 504  
 HFS Service Time by Request (H10) 522  
 HFS Wait Time by Device (H09) 519  
 HFS Wait Time by Path Name (H08) 517  
 HFS Wait Time by Request (H11) 524  
 HFSDDevice Activity (H05) 512  
 HIDE primary command 4

## I

I/O activity percentage of time  
 calculation 50  
 I/O Analysis 47  
 I01 IMS measurement profile report 281  
 I02 IMS DL/I call timeline report 286  
 I03 IMS transaction timeline report 287  
 I04 IMS transaction activity timeline report 289  
 I05 IMS DL/I CPU usage by PSB report 295  
 I06 IMS DL/I CPU usage by transaction report 298  
 I07 IMS DL/I CPU usage by DL/I call report 302  
 I081 IMS DL/I WAIT time by PSB report 305  
 I09 IMS DL/I WAIT time by transaction report 308  
 I10 IMS DL/I WAIT time by DL/I call report 311  
 I11 IMS DL/I activity by PSB report 314  
 I12 IMS DL/I activity by transaction report 317  
 I13 IMS DL/I activity by DL/I call report 321  
 I14 IMS PSB/PCB attributes report 324  
 I15 IMS DL/I call attributes report 325  
 I16 IMS transaction service times report 326  
 I17 IMS transaction DL/I call counts report 328  
 I18 IMS CPU/Svc time by DL/I calls report 330  
 I19 IMS CPU/Svc time by PSB report 332  
 I20 IMS CPU/Svc time by transaction report 334  
 I21 IMS CPU/Svc time by PCB report 336  
 I22 IMS CPU/Svc time by PCB report 338  
 IBM Support Assistant, searching for problem resolution 799  
 IDILANGX 639, 807  
 IMS 279  
 data extractor, overview of 280  
 IMS data extractor, specifying 24  
 IMS+ data extractor, specifying 24  
 IMSDLI category in C01 report 82  
 multiple address space support 280  
 source program mapping 286, 287, 295, 298, 302, 305, 308, 311, 314, 317, 321

IMS measurement reports  
 IMS CPU/Svc time by DL/I calls (I18) 330  
 IMS CPU/Svc time by PCB (I21) 336  
 IMS CPU/Svc time by PCB (I22) 338  
 IMS CPU/Svc time by PSB (I19) 332  
 IMS CPU/Svc time by transaction (I20) 334  
 IMS DL/I activity by DL/I call (I13) 321  
 IMS DL/I activity by PSB (I11) 314  
 IMS DL/I activity by transaction (I12) 317  
 IMS DL/I call attributes (I15) 325  
 IMS DL/I call timeline (I02) 286  
 IMS DL/I CPU usage by DL/I call (I07) 302  
 IMS DL/I CPU usage by PSB (I05) 295  
 IMS DL/I usage by transaction (I06) 298  
 IMS DL/I WAIT time by DL/I call (I10) 311  
 IMS DL/I WAIT time by PSB (I08) 305  
 IMS DL/I WAIT time by transaction (I09) 308  
 IMS measurement profile (I01) 281  
 IMS PSB/PCB attributes (I14) 324  
 IMS transaction activity timeline (I04) 289  
 IMS transaction DL/I call counts (I17) 328  
 IMS transaction service times (I16) 326  
 IMS transaction timeline (I03) 287  
 IMS status of observation request 12  
 IMSID keyword in batch interface 688, 703  
 IMSIMAX keyword in batch interface 688, 698  
 information centers, searching for problem resolution 799  
 Internet  
 searching for problem resolution 799  
 Interval in Days (field for future schedule) 41  
 Interval in Minutes (field for future schedule) 41  
 IPROG keyword in batch interface 688, 701  
 ISPF report navigation  
 "-" Collapse line command 7  
 "?" HELP line command 5  
 "/" Context menu line command 5  
 "+" Additional details line command 5  
 "+ " Expand line command 5  
 "SN" Sort by Name line command 7  
 "SV" Sort by Value line command 7  
 CANCEL primary command 2  
 DOWN primary command 3  
 END primary command 2  
 HIDE primary command 4  
 JUMP primary command 2  
 LEFT primary command 3  
 PREF command 3

ISPF report navigation (*continued*)  
 RIGHT primary command 3  
 SETUP primary command 3  
 SHOW primary command 4  
 UP primary command 2  
 VERSION primary command 3  
 WIN primary command 2  
 ISPF reports, navigation and control 1  
 ITRAN keyword in batch interface 688, 700  
 IUSER keyword in batch interface 688, 701

## J

J01 Java summary and attributes report 463  
 J02 Java heap usage timeline 465  
 J03 Java CPU usage by thread 467  
 J04 Java CPU usage by package report 469  
 J05 Java CPU usage by class report 471  
 J06 Java CPU usage by method report 474  
 J07 Java CPU usage by call path report 477  
 J09 Java service time by package report 480  
 J10 Java service time by class report 483  
 J11 Java service time by method report 486  
 J12 Java service time by call path report 489  
 J14 Java wait time by package report 492  
 J15 Java wait time by class report 495  
 J16 Java wait time by method report 498  
 J17 Java wait time by call path report 501  
 java  
 Dynamically loaded JVMTI agent 461  
 Preloaded loaded JVMTI agent 461  
 Java 459  
 Considerations for Java 460  
 data extractor, overview of 460  
 Java data extractor, specifying 24  
 NEW 688, 695  
 source program mapping 643  
 Java measurement reports  
 Java CPU usage by call path (J07) 477  
 Java CPU usage by class (J05) 471  
 Java CPU usage by method (J06) 474  
 Java CPU usage by package (J04) 469  
 Java CPU usage by thread (J03) 467  
 Java heap usage timeline (J02) 465  
 Java service time by call path (J12) 489  
 Java service time by class (J10) 483  
 Java service time by method (J11) 486  
 Java service time by package (J09) 480  
 Java summary and attributes (J01) 463  
 Java wait time by call path (J17) 501



Java measurement reports (*continued*)  
 Java wait time by class (J15) 495  
 Java wait time by method (J16) 498  
 Java wait time by package (J14) 492  
 Java package 463  
 JCL 662  
 JCL in batch interface 687  
 JCL, for printed reports 664  
 JCL, primary command 17  
 JCL, sample for batch interface 690  
 Job Name, specifying target job 18  
 JOBNAME keyword in batch interface 688, 695  
 JOBNAMES keyword in batch interface 688, 703  
 JUMP primary command 2

## K

K01 - CPU SRB Usage by SRB Type report 169  
 K02 - CPU SRB Usage by PSW/ObjCode report 174  
 KEEP 708  
 KEEP command in batch interface 688  
 KEEP line command 10  
 knowledge bases, searching for problem resolution 799

## L

LANGX 668  
 launch reporting 9  
 LEFT primary command 3  
 libraries, specifying additional libraries for CSECT resolution 28  
 LIBS keyword in batch interface 688, 698  
 line commands 657  
 load module information 82, 90, 93, 99, 106, 110, 114, 120, 125, 130, 134, 159, 198, 200, 207, 218, 241, 250, 259, 267, 274, 286, 287, 295, 298, 302, 305, 308, 311, 314, 317, 321, 355, 359, 363, 369, 372, 374, 377, 380, 383, 388  
 look-asides 164

## M

MAP statement in print reports JCL 668  
 Maximum number of DB2+ trace entries, specifying 27  
 Maximum number of IMS+ trace entries, specifying 27  
 Measure to step end (field in new request) 21  
 measurement profile 56, 281, 347  
 MOD 16  
 MOD line command 10  
 modes 709, 715  
 modify the request 9  
 modifying an observation request before it starts 10  
 MPP 281, 294, 295, 296, 298, 302, 305, 306, 308, 311, 314, 315, 317, 321

MQ measurement reports  
 MQ+ Activity Timeline (Q11) 445  
 MQ+ CPU/SVC Time by Queue (Q12) 448  
 MQ+ CPU/SVC Time by Request (Q13) 451  
 MQ+ CPU/SVC Time by Txn (Q14) 454  
 MQSeries activity summary (Q01) 418  
 MQSeries CPU usage by queue (Q02) 420  
 MQSeries CPU usage by request (Q03) 423  
 MQSeries CPU usage by Txn (Q04) 425  
 MQSeries service time by queue (Q05) 428  
 MQSeries service time by request (Q06) 431  
 MQSeries service time by Txn (Q07) 434  
 MQSeries wait time by queue (Q08) 437  
 MQSeries wait time by request (Q09) 440  
 MQSeries wait time by Txn (Q10) 442  
 MQI 417  
 MQSeries 417  
 MQ data extractor, specifying 24  
 overview of data extractor 417  
 source program mapping 420, 423, 425, 428, 431, 434, 437, 440, 442  
 multi-step 11  
 multiple step measurements, specifying 28  
 MultJb status of observation request 12  
 MVSBusy 207, 218, 229, 239  
 MVSWait 207, 218, 230, 239

## N

Natural  
 Natural data extractor, specifying 24  
 NEW 695  
 NEW command in batch interface 687, 695  
 NEW line command 10  
 NEW primary command 15  
 non-terminal 700  
 NONCTERM keyword in batch interface 688, 700  
 NOSYMB category 83, 99, 111, 126  
 NOTIFY keyword in batch interface 688, 697  
 Notify TSO User (field in new request) 22  
 Number of Samples (field in new request) 21

## O

object code 120, 652  
 observation 15, 714  
 observation request 1, 15

observation request, entering a new one 15  
 Observation session list panel 8  
 overview of WAS data extractor 530  
 Owned By field in Observation session list 9

## P

P line command for C/C++, using 637  
 P line command, using 637  
 P01 Source program attribution report 650  
 panel 5 input fields  
 for an IMS region 33  
 for CICS 33  
 for DB2 DDF 34  
 for DB2 stored procedure 35  
 for multiple IMS regions 36  
 for user defined function 35  
 for WebSphere 36  
 parallel activity, examples 50  
 performance reports 13, 47, 193, 279, 343  
 PREF 669  
 PREF primary command 3  
 primary commands  
 report navigation 1  
 PRINT statement in print reports JCL 669  
 printing reports  
 ISPF report request facility 660  
 overview 659  
 PDF format 660, 666, 671  
 preparing JCL 664  
 source program mapping 664  
 XML document format 660, 671  
 problem determination  
 describing problems 804  
 determining business impact 803  
 submitting problems 804  
 PROFILE 282, 669  
 PROFILE statement in print reports JCL 667  
 PSB 294, 295, 305, 314, 324, 332  
 PSW 120, 291

## Q

Q01 MQSeries activity summary report 418  
 Q02 MQSeries CPU usage by queue report 420  
 Q03 MQSeries CPU usage by request report 423  
 Q04 MQSeries CPU usage by Txn report 425  
 Q05 MQSeries service time by queue report 428  
 Q06 MQSeries service time by request report 431  
 Q07 MQSeries service time by Txn report 434  
 Q08 MQSeries wait time by queue report 437  
 Q09 MQSeries wait time by request report 440

Q10 MQSeries wait time by Txn report 442  
 Q11 MQ+ Activity Timeline report 445  
 Q12 MQ+ CPU/SVC Time by Queue 448  
 Q13 MQ+ CPU/SVC Time by Request 451  
 Q14 MQ+ CPU/SVC Time by Txn 454  
 quantification 110  
 queued system state 49

## R

R01 Application Performance Analyzer for z/OS performance reports menu 13  
 R02 Observation session list panel 8  
 R03 17  
 Realtime Monitor 709  
 reason code 693, 695  
 red light 16  
 referred attribution  
   in C08 CPU usage referred attribution report 114  
   in P01 Source program attribution report 650  
   in W03 WAIT time referred attribution report 134  
 REPEAT status of observation session 12  
 REPORT CODE primary command 2  
 reports menu 10  
 ReqNum 9  
 Request Number 9  
 request number display colors 11  
 RESERVE 137  
 RESET 3  
 Retain file for days (field in new request) 22  
 Retry interval (field in new request) 44  
 RETRYAFTER keyword in batch interface 688, 705  
 return code 693  
 RIGHT primary command 3  
 RUNAGAIN keyword in batch interface 688, 705  
 RUNTOEOS keyword in batch interface 688, 697

## S

S01 Measurement profile report 56  
 S02 Load module attributes report 67  
 S03 Load module summary report 69  
 S04 TCB summary report 71  
 S05 Memory usage timeline report 73  
 S06 Data space usage timeline report 75  
 S07 TCB execution summary report 76  
 S08 Processor utilization summary report 78  
 S09 Measurement analysis report 80  
 S10 – Observation Session Messages 81  
 SA 67  
 SAMPDSN keyword in batch interface 706  
 sample file DSN, in S01 report 60  
 Samples 71

Samples field in Observation Session list 11  
 SAMPLES keyword in batch interface 688, 697  
 sampling 40, 48  
 SCHDDATE keyword in batch interface 688, 705  
 SCHDSPAN keyword in batch interface 688, 705  
 Sched status of observation session 12  
 schedule new measurement overview 16  
   Panel 1 - Job Information 17  
   Panel 2 - Options 22  
   Panel 3 - Multi-steps 28  
   Panel 4 - Active Jobs 29  
   Panel 5 - Subsystems 31  
   Panel 6 - Sysplex 37  
   Panel 7 - Schedule 38  
   Panel 8 - Sched Options 41  
 Schedule Repeat Count (field for future schedule) 40  
 scheduling future measurements 38  
 SECTION statement in print reports JCL 669  
 Service Request Block (SRB)  
   CPU SRB Usage by PSW/ObjCode (K02) 174  
   CPU SRB Usage by SRB Type (K01) 169  
   SRB data extractor 24  
 SETUP primary command 3  
   In B12 report 572  
   in C01 report 88  
   in C02 report 93  
   in C03 report 96  
   in C04 report 98  
   in C05 report 105  
   in C06 report 109  
   in C07 report 112  
   in C08 report 118  
   in D01 report 144  
   in D02 report 147  
   in D03 report 149  
   in D05 report 153  
   in D06 report 155  
   in D07 report 158  
   in E03 report 207  
   in F04 report 363  
   in F05 report 366  
   In F10 report 380  
   In F11 report 383  
   In F12 report 387  
   in F14 report 391  
   In F15 report 394  
   In F16 report 398  
   In F17 report 402  
   In F18 report 405  
   In F19 report 409  
   in K01 report 169  
   in P01 report 652  
   in R02 report 8  
   in S02 report 68  
   in S03 report 70  
   in S05 report 74  
   in S06 report 76  
   in S10 report 82

SETUP primary command (*continued*)  
   in W01 report 129  
   in W02 report 133  
   in W03 report 137  
 SHOW primary command 4  
 Software Support  
   contacting 802  
   describing problems 804  
   determining business impact 803  
   receiving updates 801  
   submitting problems 804  
   sorting detail lines in reports 7  
   source program mapping 637  
     A01 Source Program Mapping panel 639  
     A03 Java source program mapping panel 643  
     A11 Source program mapping pick list 648  
   and printed reports (MAP statement) 668  
   copying an SPM file 639  
   dataset list, specifying 641  
   deleting the SPM entry 642  
   filling the input fields 640  
   From C01 report 82  
   From C02 report 90  
   From C03 report 93  
   From C05 report 99  
   From C06 report 106  
   From C07 report 110  
   From C08 report 114  
   From D08 report 159  
   From E03 report (CICS) 200  
   From E04 report (CICS) 207  
   From E08 report (CICS) 218, 241  
   From E09 report (CICS) 250  
   From E10 report (CICS) 259  
   From E11 report (CICS) 267  
   From E12 report (CICS) 274  
   From F03 report (DB2) 355  
   From F04 report (DB2) 359  
   From F05 report (DB2) 363  
   From F07 report (DB2) 369  
   From F08 report (DB2) 372  
   From F09 report (DB2) 374  
   From F10 report (DB2) 377  
   From F11 report (DB2) 380  
   From F12 report (DB2) 383  
   From F14 report (DB2) 388  
   From F15 report (DB2) 392  
   From F16 report (DB2) 395  
   From F17 report (DB2) 398  
   From F18 report (DB2) 402  
   From F19 report (DB2) 406  
   From I02 report (IMS) 286  
   From I03 report (IMS) 287  
   From I05 report (IMS) 295  
   From I06 report (IMS) 298  
   From I07 report (IMS) 302  
   From I08 report (IMS) 305  
   From I09 report (IMS) 308  
   From I10 report (IMS) 311  
   From I11 report (IMS) 314  
   From I12 report (IMS) 317  
   From I13 report (IMS) 321  
   From Q02 report (MQSeries) 420

source program mapping (*continued*)

- From Q03 report (MQSeries) 423
- From Q04 report (MQSeries) 425
- From Q05 report (MQSeries) 428
- From Q06 report (MQSeries) 431
- From Q07 report (MQSeries) 434
- From Q08 report (MQSeries) 437
- From Q09 report (MQSeries) 440
- From Q10 report (MQSeries) 442
- From Q11 report (MQ+) 445
- From Q12 report (MQ+) 448
- From Q13 report (MQ+) 451
- From Q14 report (MQ+) 454
- From W01 report 125
- From W02 report 130
- From W03 report 134
- loading the SPM file 642
- P line command 637
- P line command for C/C++ 637
- P01 Source program attribution 650
- specifying the associated file 640

Source program mapping

- A05 Source mapping common list panel 647
- Common data set list 637

statistics/storage reports

- Data space usage timeline (S06) 75
- Load module attributes (S02) 67
- Load module summary (S03) 69
- Measurement analysis (S09) 80
- Measurement profile (S01) 56
- Memory usage timeline (S05) 73
- Observation Session Messages (S10) 81
- Processor utilization summary (S08) 78
- TCB execution summary (S07) 76
- TCB summary (S04) 71

Status field in observation session list 11

STEP keyword in batch interface 688, 699

Step Specification Field Group (field in new request) 20

STEPS status of observation session 12

Stoppd status of observation session 12

stored procedures

- DB2 CPU by plan/stored proc report (F14) 388

SUB (Submit) line command 10

SUBMIT, primary command 17

SYSCTAN keyword in batch interface 688, 700

Sysplex

- specifying target systems 37

System name (field in new request) 20

system states

- CPU executing 49
- CPU waiting 49
- queued 49

SYSTEMS keyword in batch interface 688, 696

## T

Tagged status of observation request 12

target job

- selecting from a list of active jobs 29

target job (*continued*)

- specifying 18
- specifying system (in sysplex) for 37

target job step

- specifying 20
- specifying for multiple steps 29

Thresh status of observation request 12

Times to Retry (field in new request) 44

TNEW command in batch interface 707

Trig status of observation request 12

Trigger request, entering 46

## U

UP primary command 2

USS multiple address space measurements 462

USS observations (field in new request) 22

USS status of observation request 12

USSOBS keyword in batch interface 688, 697

## V

V01 Measurement variance summary report 177

V02 CICS variance summary report 180

V03 DB2 variance summary report 183

V04 IMS variance summary report 187

Variance reports

- CICS variance summary (V02) 180
- DB2 variance summary (V03) 183
- IMS variance summary (V04) 187
- Measurement variance summary (V01) 177

VERSION primary command 3

VSAM

- DASD VSAM statistics report (D06) 154
- VSAM buffer pool usage report (D09) 164

## W

W01 WAIT time by task/category report 125

W02 WAIT time by task/module report 130

W03 WAIT time referred attribution report 134

W04 WAIT time by task ENQ/RESERVE report 137

W05 WAIT time by tape DDNAME report 140

WAS

- WebSphere Application Services data extractor, specifying 24

WAS data extractor overview 530

WASFILTERS keyword in batch interface 703

WebSphere (WAS) performance analysis reports 529

- Async Work by Servant (B15) 578
- Async Work by Work Mgr (B14) 575

WebSphere (WAS) performance analysis reports (*continued*)

- Async Work Requests (B13) 573
- WAS Activity (B02) 534
- WAS Activity by Origin (B03) 538
- WAS Activity by Servant (B04) 543
- WAS EJB Activity (B05) 547
- WAS EJB Activity by Origin (B06) 550
- WAS EJB Activity by Servant (B07) 553
- WAS Servlet/JSP Activity (B08) 557
- WAS Servlet/JSP by Origin (B09) 560
- WAS Servlet/JSP by Servant (B10) 563
- WAS Summary (B01) 531
- WAS/CICS Calls (B11) 566, 932
- WAS/DB2 Calls (B12) 569, 933
- WOLA Inbound by Origin (B17) 584
- WOLA Inbound by Servant (B18) 588
- WOLA Inbound Requests (B16) 581
- WOLA Outbound by Register (B20) 594
- WOLA Outbound by Servant (B21) 597
- WOLA Outbound Requests (B19) 592

WIN primary command 2

Within Interval (field in new request) 43

## X

X01 CICS mean service time by transaction report 601

X02 CICS total service time by transaction report 609

X03 CICS mean service time by terminal ID report 616

X04 CICS total service time by terminal ID report 624

XML documents 664



---

## Readers' Comments — We'd Like to Hear from You

IBM Application Performance Analyzer for z/OS  
User's Guide  
Version 13 Release 1

Publication No. SC14-7597-06

We appreciate your comments about this publication. Please comment on specific errors or omissions, accuracy, organization, subject matter, or completeness of this book. The comments you send should pertain to only the information in this manual or product and the way in which the information is presented.

For technical questions and information about products and prices, please contact your IBM branch office, your IBM business partner, or your authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

Comments:

Thank you for your support.

Send your comments to the address on the reverse side of this form.

If you would like a response from IBM, please fill in the following information:

\_\_\_\_\_

Name

\_\_\_\_\_

Address

\_\_\_\_\_

Company or Organization

\_\_\_\_\_

Phone No.

\_\_\_\_\_

Email address



Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES

# BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation  
H150/090  
555 Bailey Avenue  
San Jose, CA  
USA 95141-9989



Fold and Tape

Please do not staple

Fold and Tape





Product Number: 5697-Q03

Printed in USA

SC14-7597-06

