

Progressive Die Strip Layout Design (SL9) BPA

Delivery 7 for V5R19 (V5.7)

Installation Guide

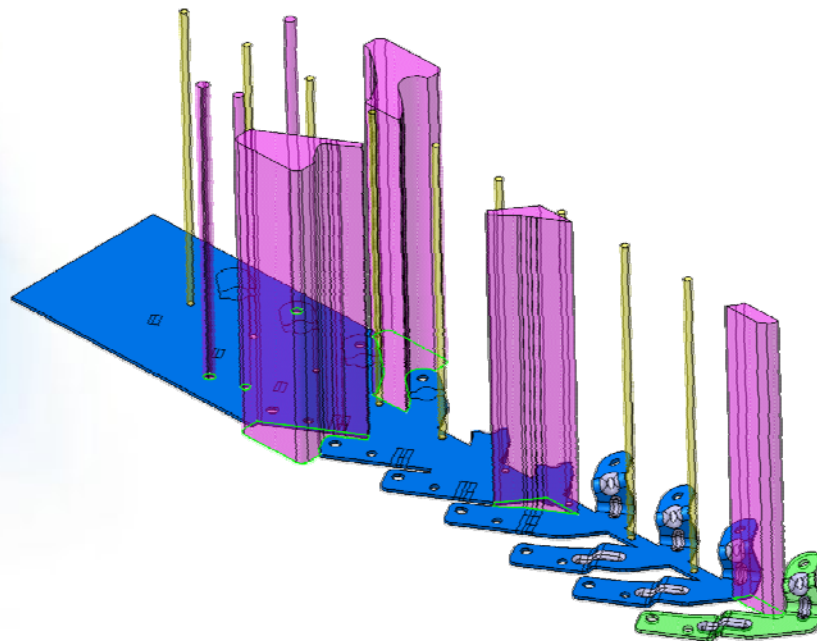


Table of Contents

PROGRESSIVE DIE STRIP LAYOUT DESIGN (SL9) BPA.....	1
DELIVERY 7 FOR V5R19 (V5.7).....	1
Installation Guide	1
Table of Contents	1
Copyright Notice	2
Introduction	3
Before Installing.....	3
1. Prerequisite for Progressive Die Strip Layout Design Installation.....	3
2. DS Product Licensing	3
3. Hardware recommendations.....	3
Progressive Die Strip Layout Design: Installation	4
License Management	8
Appendix A : Creating a Nodelock file.....	8
Appendix B : Enrolling a Concurrent license on the Network license server	9
Progressive Die Strip Layout Design Settings	12
Progressive Die Strip Layout Design: Uninstall/ Repair	16

Copyright Notice

© 2009. Dassault Systèmes, All Rights Reserved.

This guide is delivered subject to the following conditions and restrictions:

CONFIDENTIAL - This document contains unpublished, confidential and proprietary information of Dassault Systèmes.

This document or any part thereof shall not be reproduced or transferred to other documents or formats, disclosed to others or used for any purpose other than that for which it is furnished, without the prior written consent of Dassault Systèmes.

It shall be returned to Dassault Systèmes. Upon request.

Dassault Systèmes is a registered trademark of Dassault Systèmes.

CATIA® is a registered trademark of Dassault Systèmes.

Protected by one or more U.S. Patents number 5,615,321; 5,774,111; 5,821,941; 5,844,566; 6,233,351; 6,292,190; 6,360,357; 6,396,522; 6,459,441; 6,499,040; 6,545,680; 6,573,896; 6,597,382; 6,654,011; 6,654,027; 6,717,597; 6,745,100; 6,762,778; 6,828,974; 6,904,392; 6,918,095; other patents pending.

All other trademarks belong to their respective owners.

Microsoft Windows and Windows XP are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Introduction

- This document describes the installation procedure for Progressive Die Strip Layout Design BPA.

Before Installing

- Read this document and ensure you have CATIA V5 R19 installed on your computer, with the appropriate license.

1. Prerequisite for Progressive Die Strip Layout Design Installation

- Code Level Minimum:

👤 CATIA V5R19

- Recommended Configuration:

👤 PLM Express Version 2 offer or equivalent: CAT + FPE (KT1, SMD and FR1 are mandatory)



CAT:

COM+V4I+ID1+GDR+CC1+RT1+IG1+PD1+AS1+WS1+KT1+KE1+ST1+CD1+TDM



FPE:

WD1+FR1+TG1+SMD

2. DS Product Licensing


- Base of MD2 or similar + KT1 + SMD + FR1

3. Hardware recommendations

PC with Windows XP SP2 (same configurations than for MD2 CATIA V5 package)


Progressive Die Strip Layout Design: Installation

1. Unzip the SL9_R19_WIN_D7.zip on your local machine and launch "Setup.intel_a / setup.exe" for installation of SL9 BPA on 32 bit machine. For 64 bit unzip the SL9_R19_WIN64_D7.zip use "Setup.win_b64/setup.exe".

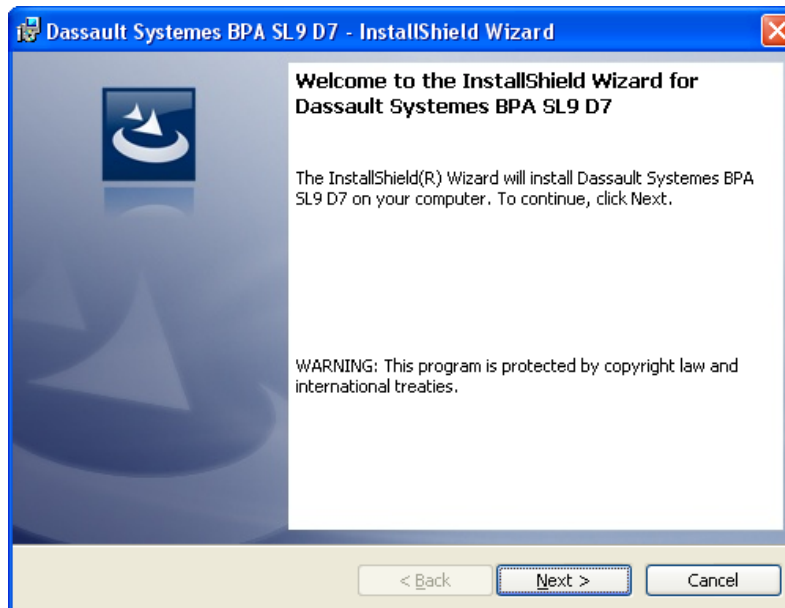


2. Click Next.

3. Enter appropriate user name and the company name (user name with Admin privileges is required).

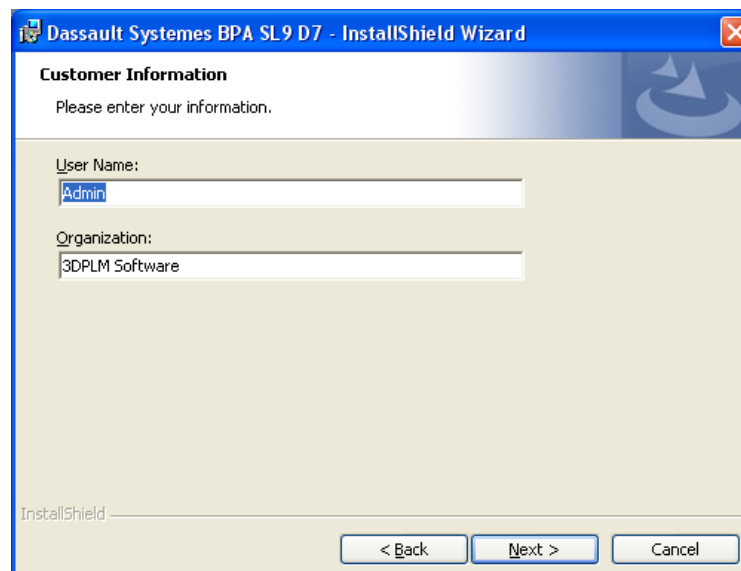


3. Click Next.

4. Choose SL9 Installation directory anywhere on your computer (SL9 will install all necessary data in this directory and will also create a directory into which the user settings will be created).

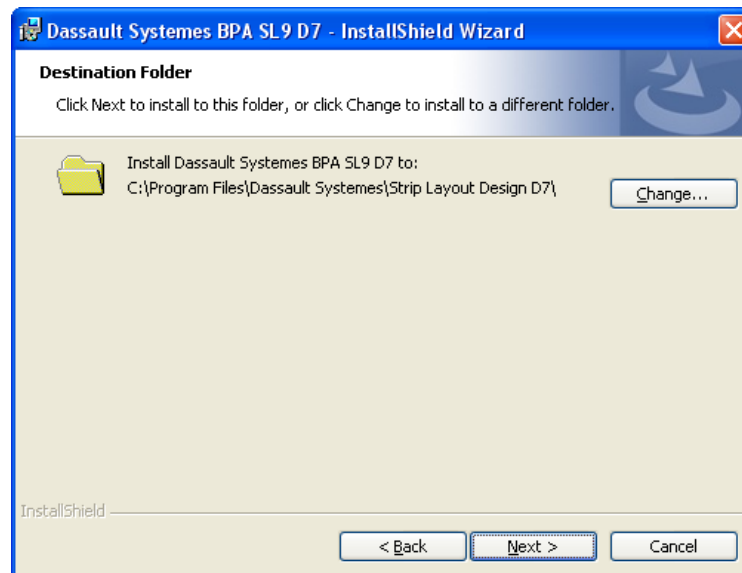


6. Click Next.


7. Select CATIA V5R19 (or higher) installation path on your computer.

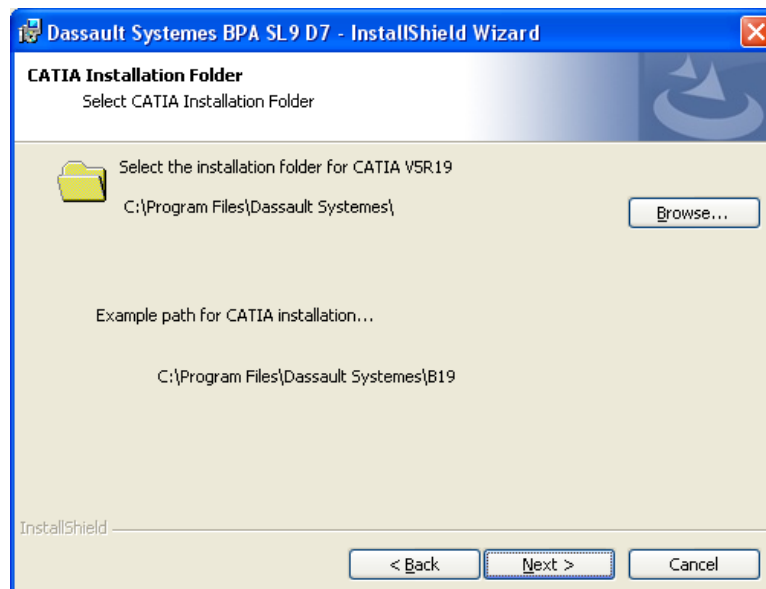

8. Click Next.

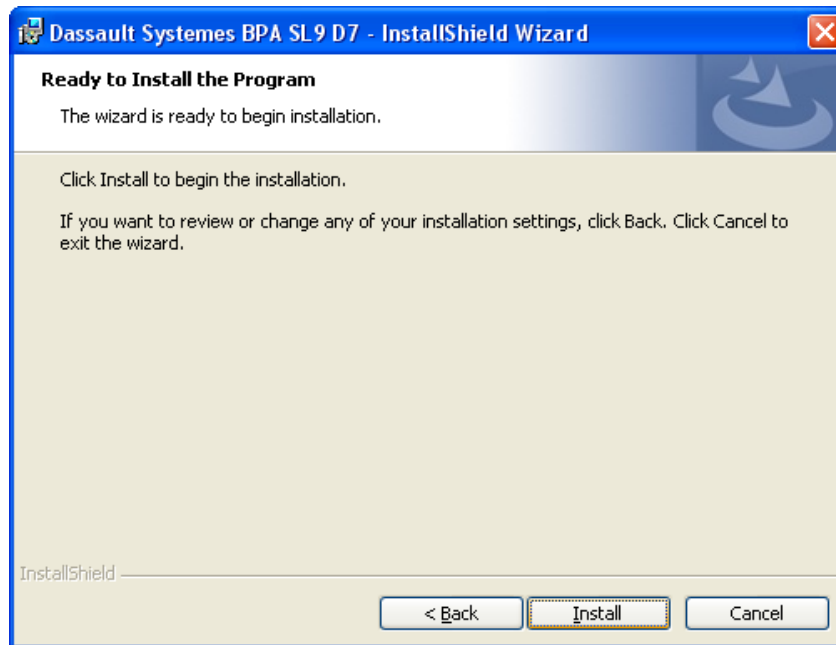

9. Select install

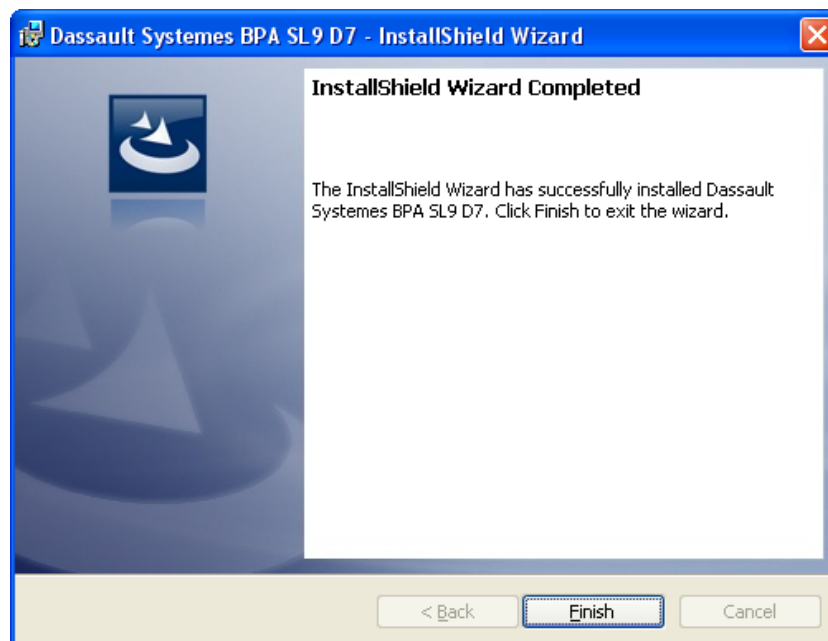

10. Select Finish (you have successfully installed the Progressive Die Strip Layout Design BPA). On your desktop, you will find a new icon like the following one:



Administrators also have a choice to install and uninstall the BPA through command prompt window

Commands options for msixec

- /i install
- /x uninstall
- /a admin installation.

The msixec can be used to run the installer in different modes like

- silent mode /q
- basic ui mode /qb
- full ui mode

Also msixec logs the progress of an installation which is useful to detect errors if any during installation

- Msixec [.msi file name] /!v [log file name]

Example:

```
msixec /i "D:\Installables\intel_a\Dassault Systemes Software BPA SL9.msi" INSTALLDIR="C:\Program Files\Dassault Systemes\Strip Layout Design D7" DASSAULT_SYSTEMES_BXX="D:\Program Files\Dassault Systemes\B19" /!v C:\Log.txt /qb
```

Where in:

PROPERTY NAME	PROPERTY Value	Example
INSTALLDIR	The Installation Directory for the application	"C:\Program Files\Dassault Systemes\Strip Layout Design D7"
DASSAULT_SYSTEMES_BXX	The Installation Directory for the CATIA application (upto Dassault Systemes\B19)	"C:\Program Files\Dassault Systemes\B19"

License Management

Information

Software Requirements:

- The license server should have IBM LUM 4.6.8.3 or above installed

Progressive Die StripLayout Design V 5.7 or higher requires a license.

To ask a license, the following information must be provided:

- Product Name: This is the BPA trigram.
- License Type: Nodelock or concurrent.
- Number of License: 1 for Nodelock , >0 for Concurrent
- LUM targetID: Provide the target id (run i4target in a DOS window)
 - On Client side for Nodelock
 - On Server side for Concurrent

On receiving the license:

- For Nodelock type of license
 - Modify/ Create Nodelock file by inserting necessary information (VendorID, ProductPassword) - See Appendix A
- For Concurrent type of license
 - Enroll the license on the LUM server - See Appendix B


Appendix A : Creating a Nodelock file

Nodelock file : how to proceed

You should input yourself the parameters of your License into the nodelock file (create it if doesn't exist)

- This file is located in C:\Documents and Settings\All Users\Application Data\IBM\LUM\nodelock
- You should extract from the .lic file the following informations :
 - VendorID (looks like an UUID)
 - ProductPassword (a crypted key)
 - ProductAnnotation (should be unset)
 - ProductVersion (should be set to 1)
- And insert them in nodelock file by respecting the order
 - # comment : put your BPA trigram and its range date
 - vendorID ProductPassword ProductAnnotation ProductVersion

Example:

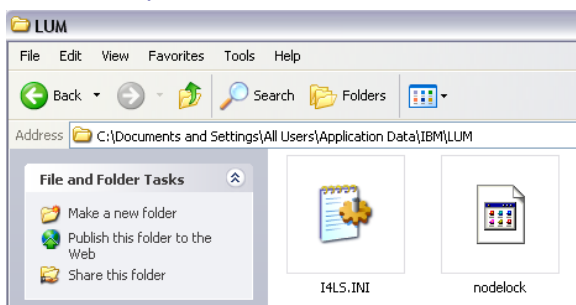


CP9 from 15-Jul-08 to 14-Jul-09
c6c8ef44bcb7.4a.74.95.13.1f.00.00.00 r8ezikjzgsvk9fzf7fe3p2gn3eaa "" "1"

Appendix B : Enrolling a Concurrent license on the Network license server


Setting up the Network License server:

Start > Programs> License Use Runtime > Configuration tool


- Stop the service if needed using the Service Manager Tool.
- Ensure that the option for Network License Server is selected

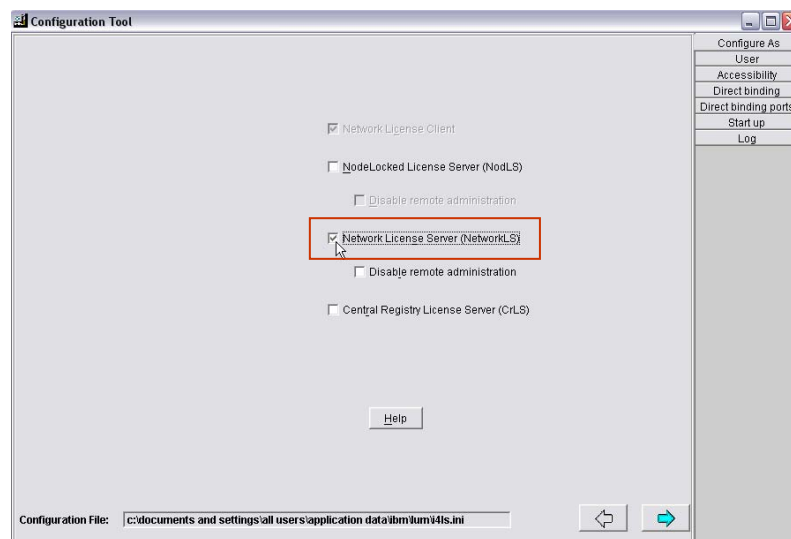


- Switch to the Direct Binding tab.
- In the Name field enter the machine name
- Check the box for NetworkLS and click on Add button

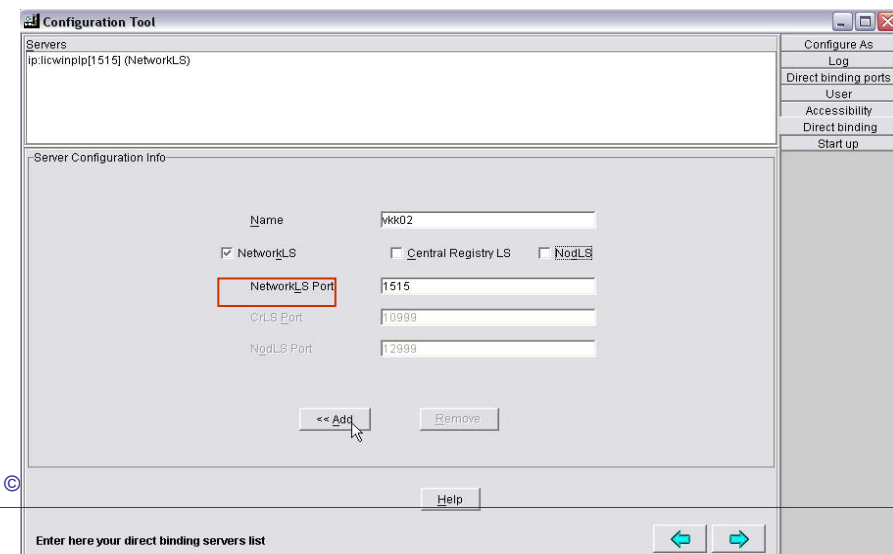

- Close the Configuration Tool window and validate accepting the changes

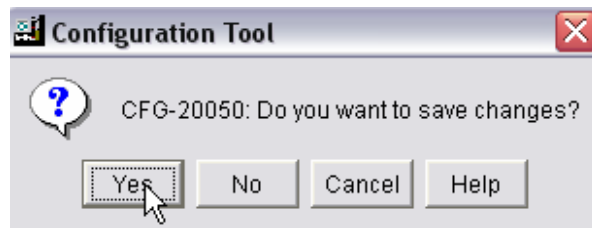


- Pass the message to restart the service (if previously it was stopped)

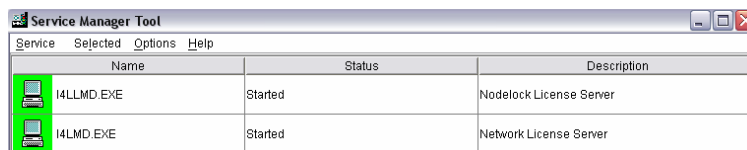


Enrolling the Concurrent License

Start > Programs> License Use Runtime > Basic License Tool

- Select Product / Enroll/
 - Choose Single or Multiple depending on whether you want to enroll a single or multiple licenses at a time.

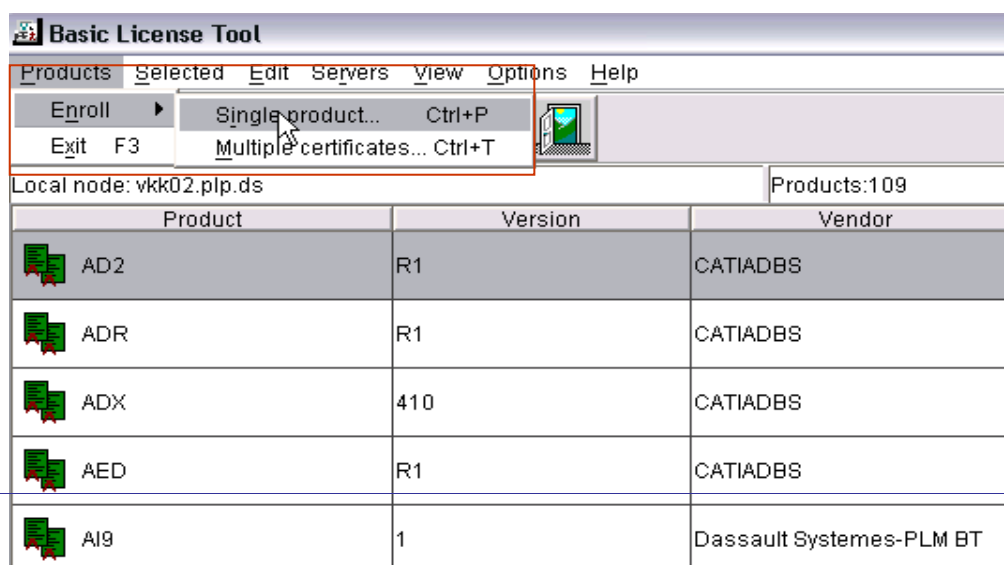

- Click on Import button

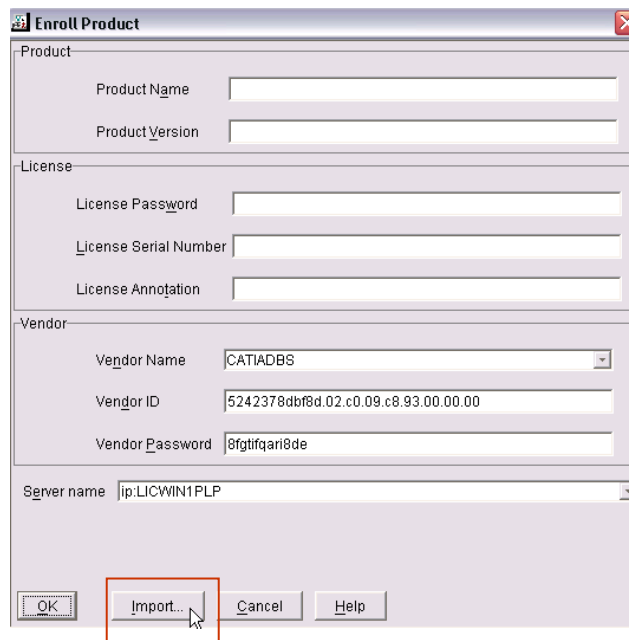

The image shows a Windows-style dialog box titled "Enroll Product". It contains several input fields organized into sections: "Product" with "Product Name" and "Product Version"; "License" with "License Password", "License Serial Number", and "License Annotation"; "Vendor" with "Vendor Name" (a dropdown menu showing "CATIADBS"), "Vendor ID" (containing a long alphanumeric string), and "Vendor Password" (containing "8ftitfqari8de"); and a "Server name" dropdown menu showing "ip:LICWIN1PLP". At the bottom, there are four buttons: "OK", "Import..." (which is highlighted with a red rectangle and a mouse cursor), "Cancel", and "Help".

Progressive Die Strip Layout Design Settings

In the case you want to modify the CATIA settings, the following one should be as shown.

The settings created by the user after launching the SL9 application will be saved in the SL9Settings folder in the root installation directory.




1. Launch Strip Layout Definition application by double clicking the SL9 icon on the desktop.
2. Select Tools / Options...

In General / Parameters and Measures:

 In the “Knowledge” tab:

 In the “Parameter Tree View” section:

 Choose “With value”

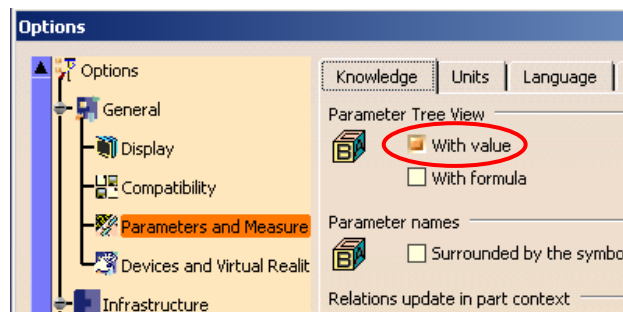


 In Units tab:



 Set the Length in **Milimeter (mm)**


 Set the Force in **DecaNewton (daN)**

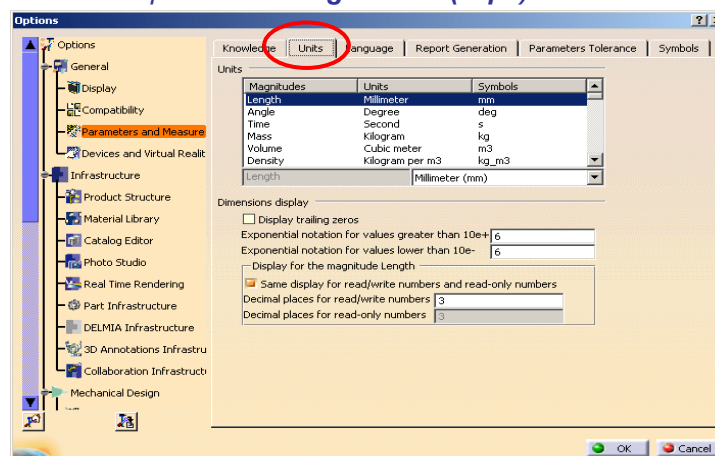 Set the pressure in **MegaPascal (Mpa)**





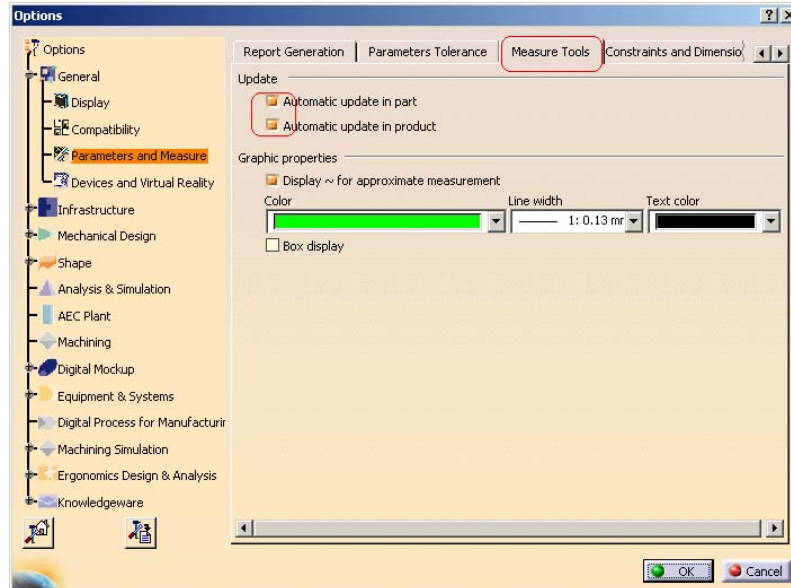

 In Measure Tools tab:


-  Choose “Automatic update in part”.
-  Choose “Automatic update in product”.



 In Infrastructure / Part infrastructure:

 In the “General” tab:


-  In “External References” section:
 -  Choose “Keep link with selected object”.
-  In “Update” section:
 -  Choose “Automatic”.

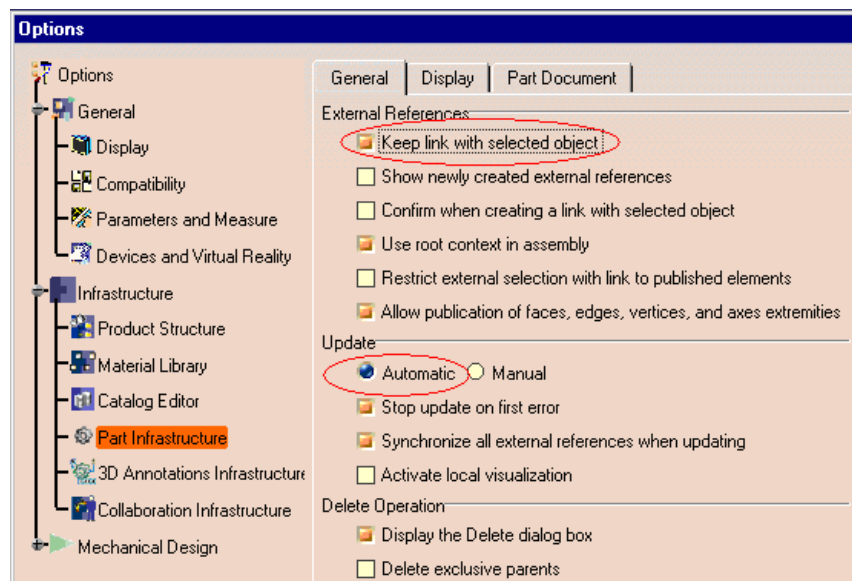

👤 In the “Display” tab:

👤 In “Display in Specification Tree” section:

➡ Activate all options.

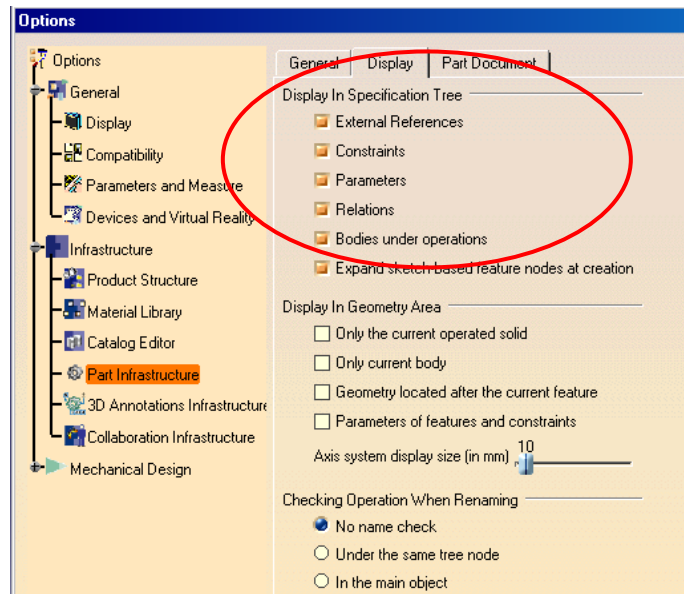


👤 In the “Part Document” tab:

👤 In “Hybrid Design” section:

➡ Activate “Enable hybrid design inside part bodies and bodies” with the “In a body” sub-option

👤 In “Color On import management” section:

➡ Activate “Inherit colors from the reference feature”

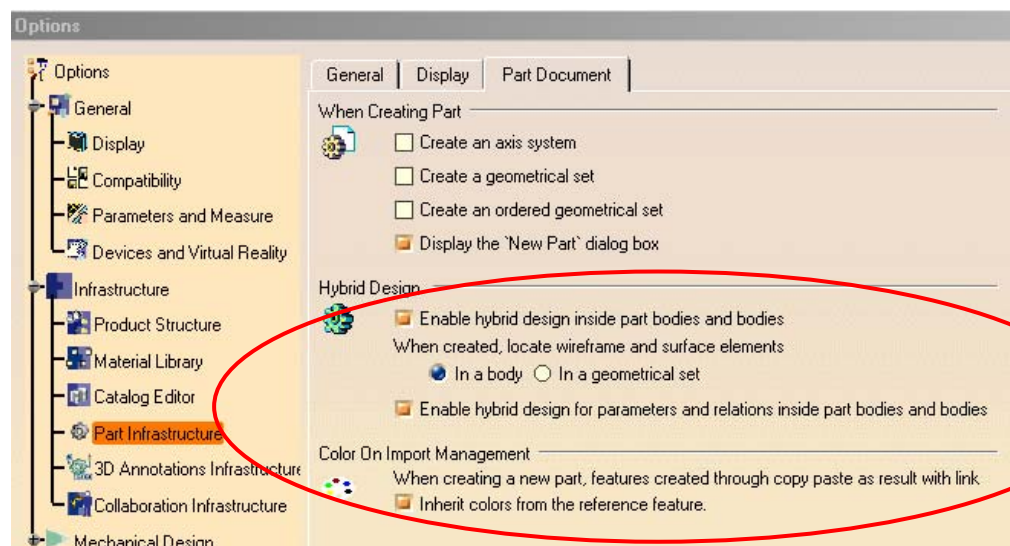


➤ **In Infrastructure / Product Structure:**

👤 In the “Tree Customization” tab:

👉 In “Specification Tree Order” section:

👉 Activate “Parameters”, “Relations” and “Constraints”.

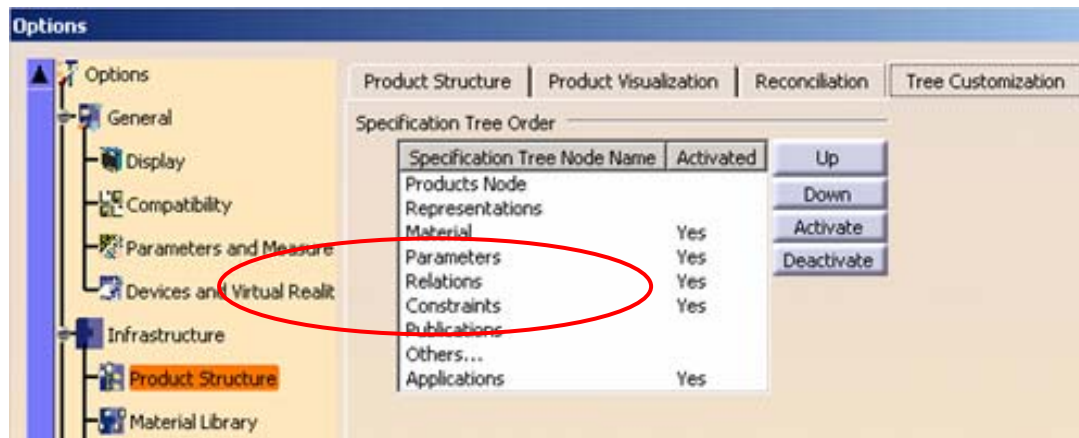


3. Validate *Ok* on the Options Panel.

4. Exit SL9 and Launch the application again.

Progressive Die Strip Layout Design: Uninstall/ Repair

1. Launch setup.exe

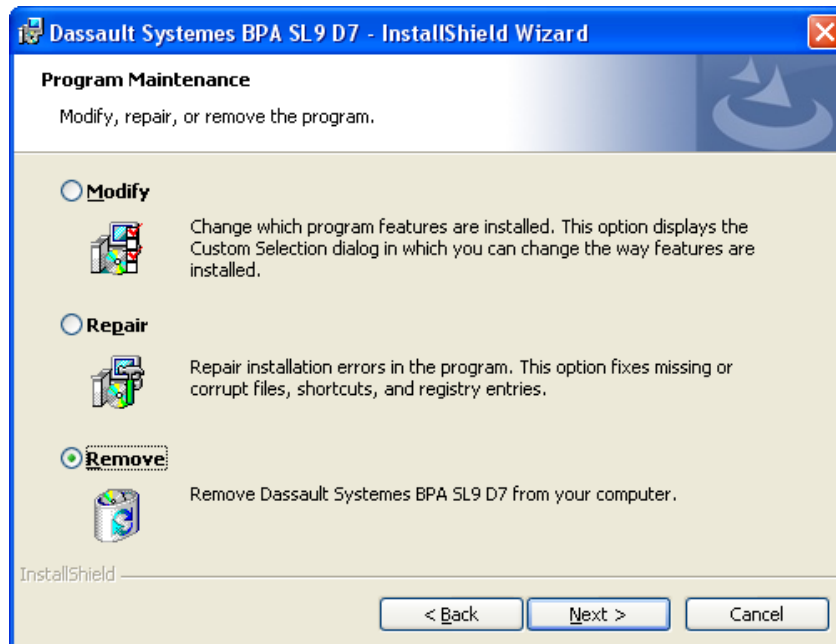

2. Select Remove / Repair. The installation is repaired or uninstalled accordingly. After Uninstall, the following dialog appears indicating successful completion of installation.

